

SAS/STAT® 13.1 User's Guide The GLMPOWER Procedure



This document is an individual chapter from SAS/STAT® 13.1 User's Guide.

The correct bibliographic citation for the complete manual is as follows: SAS Institute Inc. 2013. SAS/STAT® 13.1 User's Guide. Cary, NC: SAS Institute Inc.

Copyright © 2013, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513-2414.

December 2013

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit **support.sas.com/bookstore** or call 1-800-727-3228.

 $SAS^{\textcircled{@}}$ and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. @ indicates USA registration.

Other brand and product names are trademarks of their respective companies.



Gain Greater Insight into Your SAS® Software with SAS Books.

Discover all that you need on your journey to knowledge and empowerment.





Chapter 46

The GLMPOWER Procedure

		4		4
	on	tρ	n	tc
v	1711			

Overview: GLMPOWER Procedure	3646
Getting Started: GLMPOWER Procedure	3647
Simple Two-Way ANOVA	3647
Incorporating Contrasts, Unbalanced Designs, and Multiple Means Scenarios	3651
Syntax: GLMPOWER Procedure	3653
PROC GLMPOWER Statement	3654
BY Statement	3655
CLASS Statement	3656
CONTRAST Statement	3656
MANOVA Statement	3657
MODEL Statement	3659
PLOT Statement	3659
POWER Statement	3664
REPEATED Statement	367
WEIGHT Statement	3673
Details: GLMPOWER Procedure	3673
Specifying Value Lists in the POWER Statement	3673
Number-Lists	3674
Name-Lists	367
Keyword-Lists	3674
Sample Size Adjustment Options	3674
Error and Information Output	367
Displayed Output	3670
ODS Table Names	367
Computational Methods and Formulas	367
Contrasts in Fixed-Effect Univariate Models	367
Adjustments for Covariates in Univariate Models	3679
Contrasts in Fixed-Effect Multivariate Models	3679
ODS Graphics	368′
Examples: GLMPOWER Procedure	3688
Example 46.1: One-Way ANOVA	3688
Example 46.2: Two-Way ANOVA with Covariate	3693
Example 46.3: Repeated Measures ANOVA	3700
References	3703

Overview: GLMPOWER Procedure

Power and sample size analysis optimizes the resource usage and design of a study, improving chances of conclusive results with maximum efficiency. The GLMPOWER procedure performs prospective power and sample size analysis for linear models, with a variety of goals:

- determining the sample size required to get a significant result with adequate probability (power)
- characterizing the power of a study to detect a meaningful effect
- conducting what-if analyses to assess sensitivity of the power or required sample size to other factors

Here prospective indicates that the analysis pertains to planning for a future study. This is in contrast to retrospective analysis for a past study, which is not supported by this procedure.

The statistical analyses that are covered include Type III F tests and contrasts of fixed effects in univariate and multivariate linear models. For univariate models, you can specify covariates, which can be continuous or categorical. For multivariate models, you can choose among Wilks' likelihood ratio, Hotelling-Lawley trace, and Pillai's trace F tests for multivariate analysis of variance (MANOVA) and among uncorrected, Greenhouse-Geisser, Huynh-Feldt, and Box conservative F tests for the univariate approach to repeated measures. Tests and contrasts that involve random effects are not supported. For power and sample size analyses in a variety of other statistical situations, see Chapter 75, "The POWER Procedure."

Input for PROC GLMPOWER includes the following components, which are considered in study planning:

- design (including subject profiles and their allocation weights)
- · statistical model and test
- between-subject contrasts of class effects
- within-subject contrasts (for multivariate models)
- significance level (alpha)
- surmised response means for subject profiles (often called "cell means")
- surmised variability (and correlation for multivariate models)
- power
- sample size

In order to identify power or sample size as the result parameter, you designate it by a missing value in the input. The procedure calculates this result value over one or more scenarios of input values for all other components.

You specify the design and the cell means by using an exemplary data set, a data set of artificial values that is constructed to represent the intended sampling design and the surmised response means in the underlying population. You specify the model and between-subject contrasts by using MODEL and CONTRAST statements similar to those in the GLM, ANOVA, and MIXED procedures. For multivariate models, you specify the within-subject contrasts by using MANOVA and REPEATED statements similar to those in the GLM and MIXED procedures. You specify the remaining parameters by using the POWER statement, which is similar to analysis statements in the POWER procedure.

In addition to tabular results, PROC GLMPOWER produces graphs. You can produce the most common types of plots easily with default settings and use a variety of options for more customized graphics. For example, you can control the choice of axis variables, axis ranges, number of plotted points, mapping of graphical features (such as color, line style, symbol, and panel) to analysis parameters, and legend appearance.

If ODS Graphics is enabled, then PROC GLMPOWER uses ODS Graphics to create graphs; otherwise, traditional graphs are produced.

For more information about enabling and disabling ODS Graphics, see the section "Enabling and Disabling ODS Graphics" on page 606 in Chapter 21, "Statistical Graphics Using ODS."

For specific information about the statistical graphics and options available with the GLMPOWER procedure, see the PLOT statement and the section "ODS Graphics" on page 3687.

The GLMPOWER procedure is one of several tools available in SAS/STAT software for power and sample size analysis. PROC POWER covers a variety of other analyses such as *t* tests, equivalence tests, confidence intervals, binomial proportions, multiple regression, one-way ANOVA, survival analysis, logistic regression, and the Wilcoxon rank-sum test. The Power and Sample Size application provides a user interface and implements many of the analyses supported in the procedures. See Chapter 75, "The POWER Procedure," and Chapter 76, "The Power and Sample Size Application," for details.

The following sections of this chapter describe how to use PROC GLMPOWER and discuss the underlying statistical methodology. The section "Getting Started: GLMPOWER Procedure" on page 3647 introduces PROC GLMPOWER with examples of power computation for a two-way analysis of variance. The section "Syntax: GLMPOWER Procedure" on page 3653 describes the syntax of the procedure. The section "Details: GLMPOWER Procedure" on page 3673 summarizes the methods employed by PROC GLMPOWER and provides details on several special topics. The section "Examples: GLMPOWER Procedure" on page 3688 illustrates the use of the GLMPOWER procedure with several applications.

For an overview of methodology and SAS tools for power and sample size analysis, see Chapter 18, "Introduction to Power and Sample Size Analysis." For more discussion and examples for linear models, see Castelloe and O'Brien (2001); O'Brien and Shieh (1992); Muller and Benignus (1992); O'Brien and Muller (1993). For additional discussion of general power and sample size concepts, see O'Brien and Castelloe (2007); Castelloe (2000); Muller and Benignus (1992); Lenth (2001).

Getting Started: GLMPOWER Procedure

Simple Two-Way ANOVA

This example demonstrates how to use PROC GLMPOWER to compute and plot power for each effect test in a two-way analysis of variance (ANOVA).

Suppose you are planning an experiment to study the effect of light exposure at three levels on the growth of two varieties of flowers. The planned data analysis is a two-way ANOVA with flower height (measured

at two weeks) as the response and a model consisting of the effects of light exposure, flower variety, and their interaction. You want to calculate the power of each effect test for a balanced design with a total of 60 specimens (10 for each combination of exposure and variety) with $\alpha = 0.05$ for each test.

As a first step, create an *exemplary data set* describing your conjectures about the underlying population means. You believe that the mean flower height for each combination of variety and exposure level (that is, for each design profile, or for each *cell* in the design) roughly follows Table 46.1.

Table 46.1 Mean Flower Height (in cm) by Variety and Exposure

	Exposure		
Variety	1	2	3
1	14	16	21
2	10	15	16

The following statements create a data set named Exemplary containing these cell means.

```
data Exemplary;
  do Variety = 1 to 2;
    do Exposure = 1 to 3;
        input Height @@;
        output;
    end;
end;
datalines;
    14 16 21
    10 15 16
```

You also conjecture that the error standard deviation is about 5 cm.

Use the DATA= option in the PROC GLMPOWER statement to specify Exemplary as the exemplary data set. Identify the classification variables (Variety and Exposure) by using the CLASS statement. Specify the model by using the MODEL statement. Use the POWER statement to specify power as the result parameter and provide values for the other analysis parameters, error standard deviation and total sample size. The following SAS statements perform the power analysis:

```
proc glmpower data=Exemplary;
  class Variety Exposure;
  model Height = Variety | Exposure;
  power
     stddev = 5
     ntotal = 60
     power = .;
run;
```

The MODEL statement defines the full model including both main effects and the interaction. The POWER= option in the POWER statement identifies power as the result parameter with a missing value (POWER=.). The STDDEV= option specifies an error standard deviation of 5, and the NTOTAL= option specifies a total sample size of 60. The default value for the ALPHA= option sets the significance level to $\alpha=0.05$.

Figure 46.1 shows the output.

Figure 46.1 Sample Size Analysis for Two-Way ANOVA

```
The GLMPOWER Procedure
        Fixed Scenario Elements
Dependent Variable
                                 Height
Error Standard Deviation
Total Sample Size
                                      60
Alpha
                                   0.05
Error Degrees of Freedom
                                     54
             Computed Power
                            Test
Index
                              DF
             Source
                                    Power
                                    0.718
   1 Variety
                               1
   2
        Exposure
                               2
                                    0.957
         Variety*Exposure
                                    0.191
```

The power is about 0.72 for the test of the Variety effect. In other words, there is a probability of 0.72 that the test of the Variety effect will produce a significant result (given the assumptions for the means and error standard deviation). The power is 0.96 for the test of the Exposure effect and 0.19 for the interaction test.

Now, suppose you want to account for some of your uncertainty in conjecturing the true error standard deviation by evaluating the power at reasonable low and high values, 4 and 6.5. You also want to plot power for sample sizes between 30 and 90. The following statements perform the analysis:

```
ods graphics on;
proc glmpower data=Exemplary;
  class Variety Exposure;
  model Height = Variety | Exposure;
  power
     stddev = 4 6.5
     ntotal = 60
     power = .;
  plot x=n min=30 max=90;
run;
ods graphics off;
```

The PLOT statement with the X=N option requests a plot with sample size on the X axis. (The result parameter—in this case, power—is always plotted on the other axis.) The MIN= and MAX= options in the PLOT statement specify the sample size range. The ODS GRAPHICS ON statement enables ODS Graphics.

Figure 46.2 shows the output, and Figure 46.3 shows the plot.

Figure 46.2 Sample Size Analysis for Two-Way ANOVA with Input Ranges

	The GLMPOWER P	rocedure		
	Fixed Scenario	Elements		
Dep	endent Variable		Heigh	t
Tot	al Sample Size		6	0
Alp	ha		0.0	5
Err	or Degrees of Freedo	m	5	4
	Computed P	ower		
		Std	Test	
Index	Source	Dev	DF	Power
1	Variety	4.0	1	0.887
2	Variety	6.5	1	0.496
3	Exposure	4.0	2	0.996
4	Exposure	6.5	2	0.793
5	Variety*Exposure	4.0	2	0.280
6	Variety*Exposure	6.5	2	0.130
v	.arred, .napobare	0.5	-	0.200

Figure 46.2 reveals that the power ranges from about 0.130 to 0.996 for the different effect tests and scenarios for standard deviation, with a sample size of 60. In Figure 46.3, the line style identifies the effect test, and the plotting symbol identifies the standard deviation. The locations of the plotting symbols identify actual computed powers; the curves are linear interpolations of these points. Note that the computed points in the plot occur at sample size multiples of 6, because there are 6 cells in the design (and by default, sample sizes are rounded to produce integer cell sizes).

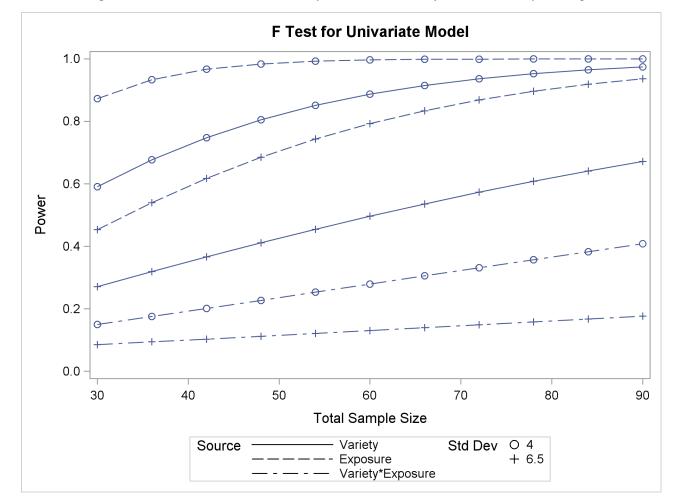


Figure 46.3 Plot of Power versus Sample Size for Two-Way ANOVA with Input Ranges

Incorporating Contrasts, Unbalanced Designs, and Multiple Means Scenarios

Suppose you want to compute power for the two-way ANOVA described in the section "Simple Two-Way ANOVA" on page 3647, but you want to additionally perform the following tasks:

- try an unbalanced sample size allocation with respect to Exposure, using twice as many samples for levels 2 and 3 as for level 1
- consider an additional, less optimistic scenario for the cell means, shown in Table 46.2
- test a contrast of Exposure comparing levels 1 and 3

Table 46.2 Additional Cell Means Scenario

	Exposure		
Variety	1	2	3
1	15	16	20
2	11	14	15

To specify the unbalanced design and the additional cell means scenario, you can add two new variables to the exemplary data set (Weight for the sample size weights, and HeightNew for the new cell means scenario). Change the name of the original cell means scenario to HeightOrig. The following statements define the exemplary data set:

```
data Exemplary;
  input Variety $ Exposure $ HeightOrig HeightNew Weight;
  datalines;
           1
               14 15
                      1
        1
          2 16 16 2
       1
          3 21 20 2
       2
           1
               10 11
                      1
       2
           2
               15 14
                      2
        2
           3
               16 15 2
```

In PROC GLMPOWER, specify the name of the weight variable by using the WEIGHT statement, and specify the name of the cell means variables as dependent variables in the MODEL statement. Use the CONTRAST statement to specify the contrast as you would in PROC GLM. The following statements perform the sample size analysis.

```
proc glmpower data=Exemplary;
  class Variety Exposure;
  model HeightOrig HeightNew = Variety | Exposure;
  weight Weight;
  contrast 'Exposure=1 vs Exposure=3' Exposure 1 0 -1;
  power
     stddev = 5
     ntotal = 60
     power = .;
run;
```

Figure 46.4 shows the output.

Figure 46.4 Sample Size Analysis for More Complex Two-Way ANOVA

```
The GLMPOWER Procedure

Fixed Scenario Elements

Weight Variable Weight
Error Standard Deviation 5
Total Sample Size 60
Alpha 0.05
Error Degrees of Freedom 54
```

Figure 46.4 continued

		Com	puted Power		
				Test	
Index	Dependent	Туре	Source	DF	Powe
1	HeightOrig	Effect	Variety	1	0.67
2	HeightOrig	Effect	Exposure	2	0.91
3	HeightOrig	Effect	Variety*Exposure	2	0.21
4	HeightOrig	Contrast	Exposure=1 vs Exposure=3	1	0.95
5	HeightNew	Effect	Variety	1	0.75
6	HeightNew	Effect	Exposure	2	0.63
7	HeightNew	Effect	Variety*Exposure	2	0.13
8	HeightNew	Contrast	Exposure=1 vs Exposure=3	1	0.70

The power of the contrast of Exposure levels 1 and 3 is about 0.95 for the original cell means scenario (HeightOrig) and only 0.71 for the new one (HeightNew). The power is higher for the test of Variety, but lower for the tests of Exposure and of Variety*Exposure for the new cell means scenario compared to the original one. Note also for the HeightOrig scenario that the power for the unbalanced design (Figure 46.4) compared to the balanced design (Figure 46.1) is slightly lower for the tests of Variety and Exposure, but slightly higher for the test of Variety*Exposure.

Syntax: GLMPOWER Procedure

The following statements are available in the GLMPOWER procedure:

```
PROC GLMPOWER < options>;
BY variables;
CLASS variables;
CONTRAST 'label' effect values < ... effect values > < / options>;
MANOVA 'label' < test-options > < / detail-options>;
MODEL dependent-variables = independent-effects;
PLOT < plot-options > < / graph-options > ;
POWER < options > ;
REPEATED factor-specification;
WEIGHT variable;
```

The PROC GLMPOWER statement, the MODEL statement, and the POWER statement are required. If your model contains classification effects, the classification variables must be listed in a CLASS statement, and the CLASS statement must appear before the MODEL statement. In addition, CONTRAST and POWER statements must appear after the MODEL statement. PLOT statements must appear after the POWER statement that defines the analysis for the plot.

If you specify one or more MANOVA or REPEATED statements, then the model is assumed to be multivariate. Otherwise, a univariate model is assumed, in which case multiple dependent variables represent cell means scenarios for a single response.

You can use multiple CONTRAST, MANOVA, REPEATED, POWER, and PLOT statements. Each CONTRAST statement defines a separate between-subject contrast. Each MANOVA or REPEATED statement defines a separate within-subject contrast for a multivariate model. Each POWER statement produces a separate analysis and uses the information that is contained in the CLASS, MODEL, WEIGHT, CONTRAST, MANOVA, and REPEATED statements. Each PLOT statement refers to the previous POWER statement and generates a separate graph (or set of graphs).

Table 46.3 summarizes the basic functions of each statement in PROC GLMPOWER. The syntax of each statement in Table 46.3 is described in the following pages.

Table 46.3 Statements in the GLMPOWER Procedure

Statement	Description
PROC GLMPOWER	Invokes procedure and specifies exemplary data set
BY	Specifies variables to define subgroups for the analysis
CLASS	Declares classification variables
CONTRAST	Defines between-subject linear tests of model parameters
MANOVA	Defines within-subject linear tests of model parameters for multivariate models, in terms of contrast matrix coefficients
MODEL	Defines model and specifies dependent variables; for univariate models, multiple dependent variables represent cell means scenarios for a single response
PLOT	Displays graphs for preceding POWER statement
POWER	Identifies parameter to solve for and provides one or more scenarios for values of other analysis parameters
REPEATED	Defines within-subject linear tests of model parameters for multivariate models, in terms of common repeated measures transformations of the dependent variables
WEIGHT	Specifies variable for allocating sample sizes to different subject profiles

PROC GLMPOWER Statement

PROC GLMPOWER < options> ;

The PROC GLMPOWER statement invokes the GLMPOWER procedure. You can specify the following options.

DATA=SAS-data-set

names a SAS data set to be used as the exemplary data set, which is an artificial data set constructed to represent the intended sampling design and the conjectured response means for the underlying population.

ORDER=DATA | FORMATTED | FREQ | INTERNAL

specifies the sort order for the levels of the classification variables (which are specified in the CLASS statement).

This option applies to the levels for all classification variables, except when you use the (default) ORDER=FORMATTED option with numeric classification variables that have no explicit format. In that case, the levels of such variables are ordered by their internal value.

The ORDER= option can take the following values:

Value of ORDER=	Levels Sorted By
DATA	Order of appearance in the input data set
FORMATTED	External formatted value, except for numeric variables with no explicit format, which are sorted by their unformatted (internal) value
FREQ	Descending frequency count; levels with the most observa- tions come first in the order
INTERNAL	Unformatted value

By default, ORDER=FORMATTED. For ORDER=FORMATTED and ORDER=INTERNAL, the sort order is machine-dependent.

For more information about sort order, see the chapter on the SORT procedure in the *Base SAS Procedures Guide* and the discussion of BY-group processing in *SAS Language Reference: Concepts*.

PLOTONLY

specifies that only graphical results from the PLOT statement be produced.

BY Statement

BY variables;

You can specify a BY statement with PROC GLMPOWER to obtain separate analyses of observations in groups that are defined by the BY variables. When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables. If you specify more than one BY statement, only the last one specified is used.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the NOTSORTED or DESCENDING option in the BY statement for the GLMPOWER procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the

data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.

• Create an index on the BY variables by using the DATASETS procedure (in Base SAS software).

Because sorting the data changes the order in which PROC GLMPOWER reads observations, the sort order for the levels of the classification variables might be affected if you have also specified ORDER=DATA in the PROC GLMPOWER statement. This, in turn, affects specifications in CONTRAST statements.

For more information about BY-group processing, see the discussion in SAS Language Reference: Concepts. For more information about the DATASETS procedure, see the discussion in the Base SAS Procedures Guide.

CLASS Statement

CLASS variables;

The CLASS statement names the classification variables to be used in the analysis. If you use the CLASS statement, it must appear before the MODEL statement.

Classification variables can be either character or numeric. By default, class levels are determined from the entire set of formatted values of the CLASS variables.

CONTRAST Statement

CONTRAST 'label' effect values < . . . effect values > < / options > ;

The CONTRAST statement enables you to define custom Type III hypothesis tests by specifying an L vector or matrix for testing either the hypothesis $\mathbf{L}\boldsymbol{\beta} = 0$ (for univariate models) or the hypothesis $\mathbf{L}\mathbf{B}\mathbf{M} = 0$ (for multivariate models). The L matrix consists of one or more between-subject contrasts.

To use this feature, you must be familiar with the details of the model parameterization that PROC GLM uses. For more information, see the section "Parameterization of PROC GLM Models" on page 3498 in Chapter 44, "The GLM Procedure." All the elements of the L matrix can be given, or if only certain portions of the L matrix are given, PROC GLMPOWER constructs the remaining elements from the context (in a manner similar to that in rule 4 in the section "Construction of Least Squares Means" on page 3533 in Chapter 44, "The GLM Procedure").

There is no limit to the number of CONTRAST statements that you can specify, but they must appear after the MODEL statement. Each power analysis includes tests for all CONTRAST statements.

You can specify the following arguments:

label identifies the contrast in the output. A label is required for every contrast that is specified. Labels must be enclosed in single or double quotation marks.

effect identifies an effect that appears in the MODEL statement, or the INTERCEPT effect. You do not need to include all effects that appear in the MODEL statement.

values are constants that are elements of the L matrix associated with the effect.

You can specify the following option in the CONTRAST statement after a slash (/):

SINGULAR=number

tunes the estimability checking. If $ABS(L - LH) > C \times number$ for any row in the contrast, then L is declared nonestimable. H is the $(X'X)^-X'X$ matrix, and C is ABS(L) except for rows where L is zero, and then it is 1. The default value for the SINGULAR= option is 10^{-4} . Values for the SINGULAR= option must be between 0 and 1.

As stated previously, the CONTRAST statement enables you to define custom hypothesis tests. If the hypothesis is testable in a univariate model, then the hypothesis sum of squares, $SS(H_0: \mathbf{L}\boldsymbol{\beta} = 0)$, is computed as

$$(Lb)'(L(X'X)^{-}L')^{-1}(Lb)$$

where
$$\mathbf{b} = (\mathbf{X}'\mathbf{X})^{-}\mathbf{X}'\mathbf{y}$$
.

For testable hypotheses in a multivariate model, the usual multivariate tests are defined by using

$$H = M'(LB)'(L(X'X)^{-}L')^{-1}(LB)M$$

where $\mathbf{B} = (\mathbf{X}'\mathbf{X})^{-}\mathbf{X}'\mathbf{Y}$ and \mathbf{Y} is the matrix of multivariate responses or dependent variables.

The degrees of freedom associated with the hypothesis are equal to the row rank of L. The sum of squares computed in this situation is equivalent to the sum of squares computed using an L matrix with any row deleted that is a linear combination of previous rows.

Multiple-degrees-of-freedom hypotheses can be specified by separating the rows of the ${\bf L}$ matrix with commas.

MANOVA Statement

MANOVA 'label' < test-options > < / detail-options > ;

If the MODEL statement includes more than one dependent variable, you can indicate a multivariate model and define transformations of dependent variables by using the MANOVA statement.

The MANOVA statement enables you to define custom Type III hypothesis tests by specifying an M vector or matrix for testing the hypothesis $\mathbf{L}\boldsymbol{\beta}\mathbf{M} = 0$. The M matrix consists of one or more within-subject contrasts.

To use this feature, you must be familiar with the details of multivariate model and contrast parameterizations that are used in PROC GLM. For more information, see the sections "Multivariate Analysis of Variance" on page 3536 and "Repeated Measures Analysis of Variance" on page 3537 in Chapter 44, "The GLM Procedure." For information about the power and sample size computational methods and formulas, see the section "Contrasts in Fixed-Effect Multivariate Models" on page 3679.

You can use either the MANOVA statement or the REPEATED statement with any of the tests for multivariate models that are supported in the MTEST= option in the POWER statement. For handling repeated measures on the same experimental unit, you would usually use the REPEATED statement instead of the MANOVA statement. But you can use the MANOVA statement in repeated measures situations, in addition to situations where you have clusters or multiple outcome variables. The differences between the MANOVA and REPEATED statements are as follows:

• You can use the MANOVA statement to construct any M matrix, but you must specify the coefficients explicitly (except for the default identity matrix).

• You can use the REPEATED statement to specify commonly used contrasts by using keywords rather than coefficients, but you are limited to only those forms of the M matrix.

There is no limit to the number of MANOVA statements that you can specify. Each power analysis includes tests for all MANOVA statements.

The *label* identifies the dependent variable transformation in the output. The label serves the same purpose as the *factor-name* in the REPEATED statement, enabling you to use the MANOVA statement for tests of within-subject effects and within-subject-by-between-subject interactions. A label is required for every transformation that is specified. Labels must be enclosed in single or double quotation marks.

Test Options

You can specify the following *test-option* in the MANOVA statement:

```
M=equation, ..., equation | (row-of-matrix, ..., row-of-matrix) specifies a transformation matrix for the dependent variables that are listed in the MODEL statement.
```

The equations in the M= specification are of the form

```
c_1 \times dependent\text{-}variable \quad \pm \quad c_2 \times dependent\text{-}variable  \cdots \quad \pm \quad c_n \times dependent\text{-}variable
```

where the c_i values are coefficients of the various *dependent-variables*. If the value of a given c_i is 1, it can be omitted; in other words, $1 \times Y$ is the same as Y. Equations should involve two or more dependent variables.

Alternatively, you can input the transformation matrix directly by entering the elements of the matrix, using commas to separate the rows and parentheses to surround the matrix. When you use this alternate form of input, the number of elements in each row must equal the number of dependent variables. Although these combinations actually represent the columns of the M matrix, they are displayed by rows.

When you include an M= specification, the tests are based on the variables that are defined by the equations in the specification, not the original dependent variables. If you omit the M= option, the tests are based on the original dependent variables in the MODEL statement. Omitting the M= option is equivalent to specifying an identity matrix, as in the following example, which assumes three dependent variables:

```
MANOVA 'Identity' M=(1 0 0,
0 1 0,
0 0 1);
```

For more examples of the M= option, see the section "Examples" on page 3473 in Chapter 44, "The GLM Procedure." The syntax and functionality of the M= option in PROC GLM are the same as in PROC GLMPOWER.

Detail Options

You can specify the following *detail-option* in the MANOVA statement after a slash (/):

ORTH

requests that the transformation matrix in the M= specification of the MANOVA statement be orthogonalized by rows before the analysis.

MODEL Statement

MODEL dependent-variables = independent-effects;

The MODEL statement names the dependent variables and independent effects. If one or more MANOVA or REPEATED statements are specified, then multiple dependent variables define a multivariate model. In the absence of the MANOVA and REPEATED statements, a univariate model is assumed, and multiple dependent variables represent different scenarios for the cell means.

The *independent-effects* can involve classification variables, continuous variables, or both. You can include main effects and interactions by using the effects notation of PROC GLM; for more information, see the section "Specification of Effects" on page 3495 in Chapter 44, "The GLM Procedure." For any model effect that involves classification variables (main effects and interactions), the number of levels cannot exceed 32,767. If no independent effects are specified, only an intercept term is fit. You can specify only one MODEL statement, and it must appear before the POWER statement if the EFFECTS= option is specified in the POWER statement.

For a univariate model, you can account for covariates without specifying them explicitly in the model by using the NCOVARIATES= option and either the CORRXY= or PROPVARREDUCTION= option in the POWER statement. For a multivariate model, you must explicitly specify any covariates in the MODEL statement.

The values of dependent variables in the exemplary data set (the data set named by the DATA= option in the PROC GLMPOWER statement) are surmised response means across subject profiles. For a univariate model, multiple dependent variables correspond to multiple scenarios for these cell means.

The MODEL statement is required. You can specify only one MODEL statement.

PLOT Statement

PLOT < plot-options > < / graph-options > ;

The PLOT statement produces a graph or set of graphs for the sample size analysis defined by the previous POWER statement. The *plot-options* define the plot characteristics, and the *graph-options* are like those in SAS/GRAPH software. If ODS Graphics is enabled, then the PLOT statement uses ODS Graphics to create graphs. For example:

```
ods graphics on;
  proc glmpower data=Exemplary;
     class Variety Exposure;
     model Height = Variety | Exposure;
     power
        stddev = 4 6.5
        ntotal = 60
        power = .;
     plot x=n min=30 max=90;
  run;
  ods graphics off;
Otherwise, traditional graphics are produced. For example:
  ods graphics off;
  proc glmpower data=Exemplary;
     class Variety Exposure;
     model Height = Variety | Exposure;
     power
        stddev = 4 6.5
        ntotal = 60
        power = .;
     plot x=n min=30 max=90;
  run;
```

For more information about enabling and disabling ODS Graphics, see the section "Enabling and Disabling ODS Graphics" on page 606 in Chapter 21, "Statistical Graphics Using ODS."

Table 46.4 summarizes the options available in the PLOT statement.

Table 46.4 PLOT Statement Options

Option	Description
Plot Options	
INTERPOL=	Specifies the type of curve to draw
KEY=	Specifies the style of key for the plot
MARKERS=	Specifies the locations for plotting symbols
MAX=	Specifies the maximum of the range of values
MIN=	Specifies the minimum of the range of values
NPOINTS=	Specifies the number of values
STEP=	Specifies the increment between values
VARY	Specifies how plot features should be linked to varying analysis parameters
X=	Specifies a plot with the requested type of parameter on the X axis
XOPTS=	Specifies plot characteristics pertaining to the X axis
Y=	Specifies a plot with the requested type of parameter on the Y axis
YOPTS=	Specifies plot characteristics pertaining to the Y axis
Graph Options	
DESCRIPTION=	Specifies a descriptive string
NAME=	Specifies a name for the catalog entry for the plot

Options

You can specify the following *plot-options* in the PLOT statement.

INTERPOL=JOIN | NONE

specifies the type of curve to draw through the computed points. The INTERPOL=JOIN option connects computed points with straight lines. The INTERPOL=NONE option leaves computed points unconnected.

KEY=BYCURVE < (bycurve-options) >

KEY=BYFEATURE < (byfeature-options) >

KEY=ONCURVES

specifies the style of key (or "legend") for the plot. The default is KEY=BYFEATURE, which specifies a key with a column of entries for each plot feature (line style, color, and/or symbol). Each entry shows the mapping between a value of the feature and the value(s) of the analysis parameter(s) linked to that feature. The KEY=BYCURVE option specifies a key with each row identifying a distinct curve in the plot. The KEY=ONCURVES option places a curve-specific label adjacent to each curve.

You can specify the following *byfeature-options* in parentheses after the KEY=BYCURVE option.

NUMBERS=OFF | ON

specifies how the key should identify curves. If NUMBERS=OFF, then the key includes symbol, color, and line style samples to identify the curves. If NUMBERS=ON, then the key includes numbers matching numeric labels placed adjacent to the curves. The default is NUMBERS=ON.

POS=BOTTOM | INSET

specifies the position of the key. The POS=BOTTOM option places the key below the X axis. The POS=INSET option places the key inside the plotting region and attempts to choose the least crowded corner. The default is POS=BOTTOM.

You can specify the following *byfeature-options* in parentheses after KEY=BYFEATURE option.

POS=BOTTOM | INSET

specifies the position of the key. The POS=BOTTOM option places the key below the X axis. The POS=INSET option places the key inside the plotting region and attempts to choose the least crowded corner. The default is POS=BOTTOM.

MARKERS=ANALYSIS | COMPUTED | NICE | NONE

specifies the locations for plotting symbols.

The MARKERS=ANALYSIS option places plotting symbols at locations corresponding to the values of the relevant input parameter from the POWER statement preceding the PLOT statement.

The MARKERS=COMPUTED option (the default) places plotting symbols at the locations of actual computed points from the sample size analysis.

The MARKERS=NICE option places plotting symbols at tick mark locations (corresponding to the argument axis).

The MARKERS=NONE option disables plotting symbols.

MAX=number | DATAMAX

specifies the maximum of the range of values for the parameter associated with the "argument" axis (the axis that is *not* representing the parameter being solved for). The default is DATAMAX, which specifies the maximum value that occurs for this parameter in the POWER statement that precedes the PLOT statement.

MIN=number | DATAMIN

specifies the minimum of the range of values for the parameter associated with the "argument" axis (the axis that is *not* representing the parameter being solved for). The default is DATAMIN, which specifies the minimum value that occurs for this parameter in the POWER statement that precedes the PLOT statement.

NPOINTS=number

NPTS=number

specifies the number of values for the parameter associated with the "argument" axis (the axis that is not representing the parameter being solved for). You cannot use the NPOINTS= and STEP= options simultaneously. The default value for typical situations is 20.

STEP=number

specifies the increment between values of the parameter associated with the "argument" axis (the axis that is not representing the parameter being solved for). You cannot use the STEP= and NPOINTS= options simultaneously. By default, the NPOINTS= option is used instead of the STEP= option.

VARY (feature < BY parameter-list > < , ..., feature < BY parameter-list >>)

specifies how plot features should be linked to varying analysis parameters. Available *features* are COLOR, LINESTYLE, PANEL, and SYMBOL. A "panel" refers to a separate plot with a heading identifying the subset of values represented in the plot.

The parameter-list is a list of one or more names, separated by spaces. Each name must match the name of an analysis option used in the POWER statement preceding the PLOT statement, or one of the following keywords:

- SOURCE, which represents the model effects and contrasts in a univariate model and the betweensubject effects and contrasts in a multivariate model
- DEPENDENT, which represents the cell means scenarios in a univariate model or the dependent variable transformations in a multivariate model

If the name represents an analysis option that is specified in the POWER statement, then it must be the primary name for the analysis option—that is, the one that is listed first in the syntax description.

If you omit the < BY parameter-list > portion for a feature, then one or more multivalued parameters from the analysis are automatically selected for you.

X=N | POWER

specifies a plot with the requested type of parameter on the X axis and the parameter being solved for on the Y axis. When X=N, sample size is assigned to the X axis. When X=POWER, power is assigned to the X axis. You cannot use the X= and Y= options simultaneously. The default is X=POWER, unless the result parameter is power, in which case the default is X=N.

XOPTS= (*x-options*)

specifies plot characteristics pertaining to the X axis.

You can specify the following *x-options* in parentheses.

CROSSREF=NO | YES

specifies whether the reference lines defined by the REF= *x-option* should be crossed with a reference line on the Y axis that indicates the solution point on the curve.

REF=number-list

specifies locations for reference lines extending from the X axis across the entire plotting region. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

Y=N | POWER

specifies a plot with the requested type of parameter on the Y axis and the parameter being solved for on the X axis. When Y=N, sample size is assigned to the Y axis. When Y=POWER, power is assigned to the Y axis. You cannot use the Y= and X= options simultaneously. By default, the X= option is used instead of the Y= option.

YOPTS= (y-options)

specifies plot characteristics pertaining to the Y axis.

You can specify the following *y-options* in parentheses.

CROSSREF=NO | YES

specifies whether the reference lines defined by the REF= *y-option* should be crossed with a reference line on the X axis that indicates the solution point on the curve.

REF=number-list

specifies locations for reference lines extending from the Y axis across the entire plotting region. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

You can specify the following *graph-options* in the PLOT statement after a slash (/).

DESCRIPTION='string'

specifies a descriptive string of up to 40 characters that appears in the "Description" field of the graphics catalog. The description does not appear on the plots. By default, PROC GLMPOWER assigns a description either of the form "Y versus X" (for a single-panel plot) or of the form "Y versus X (S)," where Y is the parameter on the Y axis, X is the parameter on the X axis, and S is a description of the subset represented on the current panel of a multipanel plot.

NAME='string'

specifies a name of up to eight characters for the catalog entry for the plot. The default name is PLOT*n*, where *n* is the number of the plot statement within the current invocation of PROC GLMPOWER. If the name duplicates the name of an existing entry, SAS/GRAPH software adds a number to the duplicate name to create a unique entry—for example, PLOT11 and PLOT12 for the second and third panels of a multipanel plot generated in the first PLOT statement in an invocation of PROC GLMPOWER.

POWER Statement

POWER < options>;

The POWER statement performs power and sample size analyses for the Type III *F* tests that are specified in the MTEST= option, for each effect in the model that is defined by the MODEL statement, and for the contrasts that are defined by all CONTRAST, MANOVA, and REPEATED statements. The POWER statement must appear after the MODEL statement if the EFFECTS= option is used in the POWER statement.

For information about the power and sample size computational methods and formulas, see the section "Computational Methods and Formulas" on page 3677.

Summary of Options

Table 46.5 summarizes the options available in the POWER statement.

Table 46.5 POWER Statement Options

	Table 46.5 POWER Statement Options
Option	Description
Specify test statistic	
MTEST=	Specifies the test statistic for a multivariate model
UEPSDEF=	Specifies the form of the Huynh-Feldt epsilon for MTEST=HF
Specify analysis information	on
ALPHA=	Specifies the level of significance of each test
EFFECTS	Specifies the model effects
Specify covariates for a un	ivariate model
CORRXY=	Specifies multiple correlation (ρ) between covariates and response
NCOVARIATES=	Specifies additional degrees of freedom due to covariates
PROPVARREDUCTION=	Specifies proportional variance reduction (r) due to covariates
Specify variability	
CORRMAT=	Specifies the correlation matrix of the dependent variables in a multivariate model
CORRS=	Specifies the correlations among the dependent variables in a multivariate model
COVMAT=	Specifies the covariance matrix of the dependent variables in a multivariate model
MATRIX=	Defines a matrix or vector
SQRTVAR=	Specifies the vector of error standard deviations for each dependent variable
	in a multivariate model
STDDEV=	Specifies the common error standard deviation
Specify sample size	
NFRACTIONAL	Enables fractional input and output for sample sizes
NTOTAL=	Specifies the sample size
Specify power	- -
POWER=	Specifies power
Choose computational me	
METHOD=	Specifies the computational method for multivariate tests

Table 46.5 continued

Option	Description
Control ordering in outp	out
DEPENDENT	Specifies the location of the Dependent or Transformation column in the
	output
OUTPUTORDER=	Controls ordering in output

Table 46.6 summarizes the valid result parameters.

Table 46.6 Summary of Result Parameters in the POWER Statement

Solve for	Syntax
Power	POWER = .
Sample size	NTOTAL = .

Dictionary of Options

ALPHA=number-list

specifies the level of significance of each test. The default is 0.05, corresponding to the usual $0.05 \times 100\% = 5\%$ level of significance. Note that this is a test-wise significance level with the same value for all tests, not incorporating any corrections for multiple testing. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

CORRMAT=name-list

specifies the correlation matrix of the dependent variables in a multivariate model, by using labels that are specified in the MATRIX= option. The corresponding matrices that are defined in the MATRIX= option must have either a lower triangular form that *includes* the diagonal of 1's or a linear exponent autoregressive (LEAR) correlation structure. The matrix must be positive definite. You can use the CORRMAT= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements. For information about specifying the *name-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

CORRS=name-list

specifies the correlations among the dependent variables in a multivariate model, by using labels that are specified in the MATRIX= option. The corresponding matrices that are defined in the MATRIX= option must have either a lower triangular form that *excludes* the diagonal of 1's or a LEAR correlation structure. The matrix must be positive definite. You can use the CORRS= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements. For information about specifying the *name-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

COVMAT=name-list

specifies the covariance matrix of the dependent variables in a multivariate model, by using labels that are specified in the MATRIX= option. The corresponding matrices that are defined in the MATRIX= option must have a lower triangular form that includes the diagonal of error variances. The matrix

must be positive definite. You can use the COVMAT= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements. For information about specifying the *name-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

CORRXY=number-list

specifies the multiple correlation (ρ) between all covariates and the response for a univariate model. The error standard deviation that is given by the STDDEV= option is consequently reduced by multiplying it by a factor of $(1-\rho^2)^{\frac{1}{2}}$, provided that the number of covariates (as determined by the NCOVARIATES= option) is greater than 0. You cannot use the CORRXY= and PROPVARREDUCTION= options simultaneously. You cannot use the CORRXY= option when you have a multivariate model—that is, in the presence of a MANOVA or REPEATED statement. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

DEPENDENT

specifies the location of the Dependent column (for a univariate model) or the Transformation column (for a multivariate model) in the output when you specify the OUTPUTORDER=REVERSE option or OUTPUTORDER=SYNTAX option, according to its relative position in the POWER statement.

EFFECTS <= <(effect ... effect) >>

specifies the model effects to include in the power analysis. By default, or if the EFFECTS keyword is specified without the equal sign (=), all model effects are included. Specify EFFECTS=() to exclude all model effect tests from the power analysis. You can include main effects and interactions by using the effects notation of PROC GLM; see the section "Specification of Effects" on page 3495 in Chapter 44, "The GLM Procedure" for further details. The MODEL statement must appear before the POWER statement if the EFFECTS option is used.

MATRIX('label')=matrix-specification

defines a matrix or vector that you can use along with the CORRMAT=, CORRS=, COVMAT=, and SQRTVAR= options when you have a multivariate model.

The *matrix-specification* can have one of the following three forms:

1. Raw values

(values)

specifies the values of a matrix or vector in one of the following forms:

- a matrix in lower triangular form, for use with the CORRMAT= or COVMAT= option
- a matrix in strictly lower triangular form, for use with the CORRS= option
- a vector, for use with the SQRTVAR= option

A matrix in lower triangular form contains the diagonal the and values below it. For example, you can represent a 3×3 correlation matrix for use with the CORRMAT= option as follows:

```
MATRIX ('MyCorrMat') = ( 1 0.5 1 0.2 0.5 1)
```

You can represent the same correlation matrix in strictly lower triangular form for use with the CORRS= option as follows:

An example of a vector for use with the SQRTVAR= option is as follows:

```
MATRIX ('MySqrtVar') = (3.2 	 4.5 	 3.7)
```

2. Linear exponent autoregressive (LEAR) correlation structure

```
LEAR (base-corr, corr-decay < , nlevels < , level-values >> )
```

specifies a LEAR correlation structure for use with the CORRMAT= or CORRS= option. The LEAR structure is useful for characterizing exponentially decaying within-subject correlation that decays at a rate slower or faster than AR(1). Special cases include compound symmetry, first-order autoregressive (AR(1)), and first-order moving average correlation structures.

The LEAR correlation structure is related to the spatial covariance structures in PROC MIXED and is discussed in Simpson et al. (2010).

The base-corr (ρ) is the correlation between variables whose level-values are one unit apart, and it must satisfy $0 \le \rho < 1$. The corr-decay (δ) is the correlation decay rate, which must be nonnegative. The default number of levels, nlevels (n), is the number of dependent variables. The default values for the nlevel-values, denoted $\{l_1, \ldots, l_n\}$, are $\{1, \ldots, n\}$. Let d_{jk} denote the distance between levels j and k, $(d_{jk} = |l_j - l_k|)$. Let $d_{\min} = \min(d_{jk} : j \ne k)$ and $d_{\max} = \max(d_{jk} : j \ne k)$. The (i, j)th element of the correlation matrix according to the LEAR model is defined as

$$\rho_{jk} = \begin{cases} 1 & \text{if } j = k \\ \rho^{d_{\min} + \delta[(d_{jk} - d_{\min})/(d_{\max} - d_{\min})]} & \text{if } j \neq k \text{ and } d_{\min} \neq d_{\max} \\ \rho & \text{if } j \neq k \text{ and } d_{\min} = d_{\max} \end{cases}$$

Compound symmetry is the special case $\delta = 0$. AR(1) is the special case $\delta = d_{\text{max}} - d_{\text{min}}$. As $\delta \to \infty$, the model approaches the first-order moving average model.

3. Kronecker product

```
'matrix-name' @ 'matrix-name' < @ ... @ 'matrix-name' >
```

specifies a direct (Kronecker) product of two or more matrices for use with the CORRMAT=, CORRS=, or COVMAT= option. This form is useful when you have more than one type of distinction among dependent variables. For example, suppose you have a three-level repeated measurement factor with correlation that is 0.4 for neighboring measurements and that decays slightly more slowly than AR(1) across more distant measurements. You also have four clusters that you believe satisfy compound symmetry with a correlation of 0.3. Your level values are the same as the default for the LEAR model. You can specify this correlation structure as follows:

```
MATRIX ('RepMeasures') = LEAR (0.4, 1.5, 3)
MATRIX ('Clusters') = LEAR (0.3, 0, 4)
MATRIX ('FullCorr') = 'RepMeasures' @ 'Clusters'
CORRMAT = 'FullCorr'
```

You can use the MATRIX option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements.

METHOD=MULLERPETERSON | MP

METHOD=OBRIENSHIEH | OS

specifies the power computation method for the multivariate tests (MTEST=HLT, MTEST=PT, and MTEST=WILKS). METHOD=OBRIENSHIEH (the default) is based on O'Brien and Shieh (1992), and METHOD=MULLERPETERSON is based on Muller and Peterson (1984). For information about the associated power and sample size computational methods and formulas, see the section "Multivariate Tests" on page 3681.

If the dependent variable transformation consists of a single contrast $(r_M=1)$, then the two methods are identical and compute exact power. If $r_M>1$ but the model effect or between-subject contrast has only one degree of freedom $(r_L=1)$, then METHOD=OBRIENSHIEH computes exact results and METHOD=MULLERPETERSON computes approximate results. If $r_M>1$ and $r_L>1$, then both methods compute approximate results.

You can use the METHOD= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements.

MTEST=test-list

specifies the form of the *F* test for a multivariate model. Seven keywords are available, as discussed in the following paragraphs: BOX, GG, HF, HLT, PT, UNCORR, and WILKS. For information about specifying the *keyword-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

Three of these tests are multivariate, corresponding to the default MSTAT=FAPPROX option in the MANOVA and REPEATED statements in PROC GLM:

- MTEST=HLT (the default) is the Hotelling-Lawley trace
- MTEST=PT is Pillai's trace
- MTEST=WILKS is Wilks' lambda

For more information about these multivariate tests, see the section "Multivariate Tests" on page 94 in Chapter 4, "Introduction to Regression Procedures." For information about the associated power and sample size computational methods and formulas, see the section "Multivariate Tests" on page 3681.

The other four tests are univariate, corresponding to the univariate approach to repeated measures in the REPEATED statement in PROC GLM:

- MTEST=UNCORR is the uncorrected univariate F test, assuming sphericity ($\varepsilon = 1$).
- MTEST=GG is the F test with the Greenhouse-Geisser adjustment, estimating ε by its maximum likelihood estimate $\hat{\varepsilon}$.
- MTEST=HF is the F test with the Huynh-Feldt adjustment as specified by the UEPSDEF= option, using an approximately unbiased estimate $\tilde{\varepsilon}$.
- MTEST=BOX is the F test with Box's conservative adjustment, estimating sphericity by its smallest possible value $1/r_M$, where r_M is the number of within-subject contrasts in the dependent variable transformation.

For more information about these univariate tests, see the section "Hypothesis Testing in Repeated Measures Analysis" on page 3540 in Chapter 44, "The GLM Procedure." For information about the associated power and sample size computational methods and formulas, see the section "Univariate Tests" on page 3685.

These tests are all of the form $L\beta M = 0$, where L is a between-subject contrast, β is the matrix of model parameters, and M is a within-subject contrast.

You can use the MTEST= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements.

NCOVARIATES=number-list

NCOVARIATE=number-list

NCOVS=number-list

NCOV=number-list

specifies the number of additional degrees of freedom to accommodate covariate effects—both class and continuous—not listed in the MODEL statement, for a univariate model. The error degrees of freedom are consequently reduced by the value of the NCOVARIATES= option, and the error standard deviation (whose unadjusted value is provided with the STDDEV= option) is reduced according to the value of the CORRXY= or PROPVARREDUCTION= option. You cannot use the NCOVARIATES= option when you have a multivariate model—that is, in the presence of a MANOVA or REPEATED statement. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

NFRACTIONAL

NFRAC

enables fractional input and output for sample sizes. See the section "Sample Size Adjustment Options" on page 3674 for information about the ramifications of the presence (and absence) of the NFRACTIONAL option.

NTOTAL=number-list

specifies the sample size or requests a solution for the sample size with a missing value (NTOTAL=.). The term "sample size" here refers to the number of independent sampling units. Values for the sample size for a univariate model must be no smaller than the model degrees of freedom (counting the covariates if present). The minimum required sample size for a multivariate model depends on the analysis and computational method; for more information, see the section "Contrasts in Fixed-Effect Multivariate Models" on page 3679. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

OUTPUTORDER=INTERNAL | REVERSE | SYNTAX

controls how the input and default analysis parameters are ordered in the output. OUT-PUTORDER=INTERNAL (the default) arranges the parameters in the output according to the following order of their corresponding options:

- DEPENDENT
- EFFECTS
- weight variable (from the WEIGHT statement)
- ALPHA=

- NCOVARIATES=
- CORRXY=
- PROPVARREDUCTION=
- STDDEV=
- NTOTAL=
- POWER=

The OUTPUTORDER=SYNTAX option arranges the parameters in the output in the same order in which their corresponding options are specified in the POWER statement. The OUT-PUTORDER=REVERSE option arranges the parameters in the output in the reverse of the order in which their corresponding options are specified in the POWER statement.

POWER=number-list

specifies the desired power of each test or requests a solution for the power with a missing value (POWER=.). The power is expressed as a probability (for example, 0.9) rather than a percentage. Note that this is a test-wise power with the same value for all tests, without any correction for multiple testing. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

PROPVARREDUCTION=number-list

PVRED=number-list

specifies the proportional reduction (r) in total R square incurred by the covariates—in other words, the amount of additional variation explained by the covariates—for a univariate model. The error standard deviation that is given by the STDDEV= option is consequently reduced by multiplying it by a factor of $(1-r)^{\frac{1}{2}}$, provided that the number of covariates (as determined by the NCOVARIATES= option) is greater than 0. You cannot use the PROPVARREDUCTION= and CORRXY= options simultaneously. You cannot use the PROPVARREDUCTION= option when you have a multivariate model—that is, in the presence of a MANOVA or REPEATED statement. For information about specifying the number-list, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

SQRTVAR=name-list

specifies the vector of standard deviations—that is, the square roots of the variances—of the dependent variables in a multivariate model, by using labels that are specified using the MATRIX= option. The standard deviation values must be positive. You can use the SQRTVAR= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements. For information about specifying the *name-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

STDDEV=number-list

specifies the error standard deviation, or root MSE. For a multivariate model, each value in the *number-list* is taken to be a common value for all dependent variables. If covariates are specified by using the NCOVARIATES= option, then the STDDEV= option denotes the error standard deviation before accounting for these covariates. For information about specifying the *number-list*, see the section "Specifying Value Lists in the POWER Statement" on page 3673.

UEPSDEF=unbiased-epsilon-definition

specifies the type of adjustment for MTEST=HF. The default is UEPSDEF=HFL, corresponding to the corrected form of the Huynh-Feldt adjustment (Huynh and Feldt 1976; Lecoutre 1991). Other alternatives are UEPSDEF=HF; the uncorrected Huynh-Feldt adjustment; and UEPSDEF=CM, the adjustment of Chi et al. (2012). For more information about these adjustments, see the section "Hypothesis Testing in Repeated Measures Analysis" on page 3540 in Chapter 44, "The GLM Procedure." You can use the UEPSDEF= option only when you have a multivariate model—that is, in the presence of one or more MANOVA or REPEATED statements. For information about the associated power and sample size computational methods and formulas, see the section "Univariate Tests" on page 3685.

Restrictions on Option Combinations

To specify the variability in a multivariate model, choose one of the following parameterizations:

- covariance matrix (using the MATRIX= and COVMAT= options)
- standard deviations and correlations (using the MATRIX=, SQRTVAR=, and CORRS= options)
- common standard deviation and correlations (using the STDDEV=, MATRIX=, and CORRS= options)
- standard deviations and correlation matrix (using the MATRIX=, SQRTVAR=, and CORRMAT= options)
- common standard deviation and correlation matrix (using the STDDEV=, MATRIX=, and CORRMAT= options)

For the relationship between covariates and response in a univariate model, specify either the multiple correlation (by using the CORRXY= option) or the proportional reduction in total R square (by using the PROPVARREDUCTION= option).

REPEATED Statement

REPEATED factor-specification;

If the MODEL statement includes more than one dependent variable, you can indicate a multivariate model and define transformations of dependent variables by using the REPEATED statement.

The REPEATED statement enables you to define custom Type III hypothesis tests by choosing from among several transformations of the dependent variables: contrast, Helmert, identity, mean, polynomial, and profile. Each of these transformations produces an M vector or matrix for testing the hypothesis $\mathbf{L}\boldsymbol{\beta}\mathbf{M}=0$. The M matrix consists of one or more within-subject contrasts.

To use this feature, you must be familiar with the details of multivariate model and contrast parameterizations that PROC GLM uses. For more information, see the sections "Repeated Measures Analysis of Variance" on page 3537 and "Multivariate Analysis of Variance" on page 3536 in Chapter 44, "The GLM Procedure." For information about the power and sample size computational methods and formulas, see the section "Contrasts in Fixed-Effect Multivariate Models" on page 3679.

If you specify one or more REPEATED statements, then a "Mean(Dep)" transformation is added to the power analysis. This transformation is the mean of the dependent variables, the same transformation that is used

implicitly in the "Tests of Hypotheses for Between Subjects Effects" table in PROC GLM. In addition, the Intercept model effect is included in the power analysis. If the REPEATED statement is not specified, then tests that involve the Intercept are excluded from the power analysis.

You can use either the REPEATED statement or the MANOVA statement along with any of the tests for multivariate models that are supported in the MTEST= option in the POWER statement. The REPEATED statement is usually used for handling repeated measurements on the same experimental unit, but you can also use the REPEATED statement for other situations, such as clusters or multiple outcome variables. The differences between the REPEATED and MANOVA statements are as follows:

- You can use the REPEATED statement to specify commonly used contrasts by using keywords rather than coefficients, but you are limited to only those forms of the M matrix.
- You can use the MANOVA statement to construct any M matrix, but you must specify the coefficients explicitly (except for the default identity matrix).

There is no limit to the number of REPEATED statements that you can specify. Each power analysis includes tests for all REPEATED statements and also (if you specify at least one REPEATED statement) the extra "Mean(Dep)" transformation that was previously mentioned.

The simplest form of the REPEATED statement requires only a *factor-name*. Optionally, you can specify the actual values for the levels (*level-values*) and a *transformation* that defines single-degree-of-freedom contrasts.

The factor-specification for the REPEATED statement has the following form:

factor-name < (level-values) > < transformation >

factor-name names a factor to be associated with the dependent variables. The name should not be the

same as any variable name that already exists in the data set being analyzed and should

conform to the usual conventions of SAS variable names.

(level-values) gives values that correspond to levels of a repeated measures factor. The number of

levels must be the same as the number of dependent variables in the model. These values are used as spacings for constructing orthogonal polynomial contrasts if you specify a

POLYNOMIAL transformation. Enclose the level-values in parentheses.

The following *transformation* keywords define single-degree-of-freedom contrasts. Because the number of contrasts that are generated is always one less than the number of levels of the factor, you have some control over which contrast is omitted from the analysis by which transformation you select. The only exception is the IDENTITY transformation, which is not composed of contrasts and has the same degrees of freedom as the factor has levels. By default, PROC GLMPOWER uses the CONTRAST transformation.

CONTRAST< (ordinal-reference-level) >

generates contrasts between levels of the factor and a reference level. By default, PROC GLMPOWER uses the last level as the reference level; you can optionally specify a reference level in parentheses after the keyword CONTRAST. The reference level corresponds to the ordinal value of the level rather than the level value that is specified. For example, to generate contrasts between the first level of a factor and the other levels, specify CONTRAST(1).

HELMERT

generates contrasts between each level of the factor and the mean of subsequent levels.

IDENTITY

generates an identity transformation that corresponds to the associated factor. This transformation is *not* composed of contrasts; it has n degrees of freedom for an n-level factor, instead of n-1 degrees of freedom.

MEAN<(ordinal-reference-level)>

generates contrasts between levels of the factor and the mean of all other levels of the factor. Specifying a reference level eliminates the contrast between that level and the mean. When no reference level is specified, the contrast that involves the last level is omitted. For an example, see the CONTRAST transformation.

POLYNOMIAL

generates orthogonal polynomial contrasts. Level values, if provided, are used as spacings in the construction of the polynomials; otherwise, equal spacing is assumed.

PROFILE

generates contrasts between adjacent levels of the factor.

WEIGHT Statement

WEIGHT variable;

The WEIGHT statement names a variable that provides a profile weight ("cell weight") for each observation in the exemplary data set specified by the DATA= option in the PROC GLMPOWER statement.

If the WEIGHT statement is not used, then a balanced design is assumed with default cell weights of 1.

Details: GLMPOWER Procedure

Specifying Value Lists in the POWER Statement

To specify one or more scenarios for an analysis parameter (or set of parameters) in the POWER statement, you provide a list of values for the option that corresponds to the parameter(s). To identify the parameter you want to solve for, you place a missing value in the appropriate list.

There are three basic types of such lists: *number-lists*, *name-lists*, and *keyword-lists*. Scenarios for scalar-valued parameters, such as power, are represented by a *number-list*. Scenarios for named parameters, such as correlation matrices, are represented by a *name-list*. Some parameters, such as the test statistic for a multivariate model, have values that are represented by one or more keywords in a *keyword-list*.

Number-Lists

A *number-list* can be one of two things: a series of one or more numbers expressed in the form of one or more DOLISTs, or a missing value indicator (.).

The DOLIST format is the same as in the DATA step. For example, you can specify four scenarios (30, 50, 70, and 100) for a total sample size in either of the following ways:

```
NTOTAL = 30 50 70 100
NTOTAL = 30 to 70 by 20 100
```

A missing value identifies a parameter as the result parameter; it is valid only with options representing parameters you can solve for in a given analysis. For example, you can request a solution for NTOTAL as follows:

```
NTOTAL = .
```

Name-Lists

A *name-list* is a list of one or more names that are enclosed in single or double quotation marks and separated by spaces. For example, you can specify two scenarios for the correlation matrix in a multivariate model as follows:

```
CORRMAT = "Corr A" "Corr B"
```

Keyword-Lists

A *keyword-list* is a list of one or more keywords, separated by spaces. For example, you can specify both the multivariate Hotelling-Lawley trace and uncorrected univariate F test for a multivariate model as follows:

```
MTEST = HLT UNCORR
```

Sample Size Adjustment Options

By default, PROC GLMPOWER rounds sample sizes conservatively (down in the input, up in the output) so that all total sizes *and* sample sizes for individual design profiles are integers. This is generally considered conservative because it selects the closest realistic design providing *at most* the power of the (possibly fractional) input or mathematically optimized design. In addition, all design profile sizes are adjusted to be multiples of their corresponding weights. If a design profile is present more than once in the exemplary data set, then the weights for that design profile are summed. For example, if a particular design profile is present twice in the exemplary data set with weight values 2 and 6, then all sample sizes for this design profile become multiples of 2 + 6 = 8.

With the NFRACTIONAL option, sample size input is not rounded, and sample size output is reported in two versions, a raw "fractional" version and a "ceiling" version rounded up to the nearest integer.

Whenever an input sample size is adjusted, both the original ("nominal") and adjusted ("actual") sample sizes are reported. Whenever computed output sample sizes are adjusted, both the original input ("nominal") power and the achieved ("actual") power at the adjusted sample size are reported.

Error and Information Output

The Error column in the main output table explains reasons for missing results and flags numerical results that are bounds rather than exact answers.

The Info column provides further information about Error entries, warnings about any boundary conditions detected, and notes about any adjustments to input. Note that the Info column is hidden by default in the main output. You can view it by using the ODS OUTPUT statement to save the output as a data set and the PRINT procedure. For example, the following SAS statements print both the Error and Info columns for a power computation in a one-way ANOVA:

```
data MyExemp;
   input A $ Y1 Y2;
   datalines;
         1 10 11
         2 12 11
         3
             15 11
;
proc glmpower data=MyExemp;
   class A;
   model Y1 Y2 = A;
   power
      stddev = 2
      ntotal = 3 10
      power = .;
   ods output output=Power;
run;
proc print noobs data=Power;
   var NominalNTotal NTotal Dependent Power Error Info;
run;
```

The output is shown in Figure 46.5.

Figure 46.5 Error and Information Columns

Nominal NTotal	NTotal	Dependent	Power	Error	Info
3	3	Y1		Invalid input	Error DF=0
10	9	Y1	0.557		Input N adjusted
3	3	Y2		Invalid input	Error DF=0 / No effect
10	9	Y2	0.050		Input N adjusted / No effect

The sample size of 3 specified with the NTOTAL= option causes an "Invalid input" message in the Error column and an "Error DF=0" message in the Info column, because a sample size of 3 is so small that there are no degrees of freedom left for the error term. The sample size of 10 causes an "Input N adjusted" message in the Info column, because it is rounded down to 9 to produce integer group sizes of 3 per cell. The cell means scenario represented by the dependent variable Y2 causes a "No effect" message to appear in the Info column, because the means in this scenario are all equal.

Displayed Output

If you use the PLOTONLY option in the PROC GLMPOWER statement, the procedure displays only graphical output. Otherwise, the displayed output of the GLMPOWER procedure includes the following:

- the "Fixed Scenario Elements" table, which shows all applicable single-valued analysis parameters, in the following order: the dependent variable that represents the cell means scenario (for a univariate model) or the dependent variable transformation (for a multivariate model), the source of the test (that is, the model effect or between-subject contrast), the weight variable, parameters that are input explicitly, parameters that are supplied with defaults, and ancillary results
- an output table that shows the following when applicable (in order): the index of the scenario, the dependent variable that represents the cell means scenario (for a univariate model) or the dependent variable transformation (for a multivariate model), the type of the test, the source of the test (that is, the model effect or between-subject contrast), all multivalued input, ancillary results, the primary computed result, and error descriptions
- plots (if requested)

The exception to these ordering conventions is that the DEPENDENT and EFFECTS= options can be used along with the OUTPUTORDER=SYNTAX or OUTPUTORDER=REVERSE option in the POWER statement to specify the relative location of the output for dependent variable and type and source of test.

Ancillary results include the following:

- Actual Power, the achieved power, if it differs from the input (Nominal) power value
- Actual Alpha, the achieved significance level, if it differs from the input (Nominal) alpha value
- fractional sample size, if the NFRACTIONAL option is used in the POWER statement
- test or numerator degrees of freedom in the test's critical value
- error or denominator degrees of freedom in the test's critical value
- Effect, the combination of the within-subject Transformation contrast and between-subject Source test or contrast in a multivariate model

If sample size is the result parameter and the NFRACTIONAL option is used in the POWER statement, then both "Fractional" and "Ceiling" sample size results are displayed. Fractional sample sizes correspond to the "Nominal" values of power. Ceiling sample sizes are simply the fractional sample sizes rounded up to the nearest integer; they correspond to "Actual" values of power.

The noncentrality parameter is computed and stored in a hidden column called Noncentrality in the "Output" table. If a univariate test for a multivariate model is specified (that is, one of MTEST=BOX, MTEST=GG, MTEST=HF, or MTEST=UNCORR), then the numerator and denominator degrees of freedom that are used in the noncentral F approximation of the test statistic distribution are computed and stored in hidden columns called NumNCDF and DenNCDF, respectively, in the "Output" table. These are the only tests for which the degrees of freedom in the noncentral F approximation of the test statistic are different from those in the critical value.

ODS Table Names

PROC GLMPOWER assigns a name to each table that it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in Table 46.7. For more information about ODS, see Chapter 20, "Using the Output Delivery System."

ODS Table Name	Description	Statement
FixedElements	Factoid with single-valued analysis parameters	Default
Output	All input and computed analysis parameters, error messages, and information messages for each scenario	Default
PlotContent	Data contained in plots, including analysis parameters and indices identifying plot features. (NOTE: This table is saved as a data set and not displayed in PROC GLMPOWER output.)	PLOT

Table 46.7 ODS Tables Produced by PROC GLMPOWER

Computational Methods and Formulas

This section describes the approaches that PROC GLMPOWER uses to compute power and sample size.

Contrasts in Fixed-Effect Univariate Models

The univariate linear model has the form

$$y = X\beta + \epsilon$$

where y is the $N \times 1$ vector of responses, X is the $N \times k$ design matrix, β is the $k \times 1$ vector of model parameters corresponding to the columns of X, and ϵ is an $N \times 1$ vector of errors with

$$\epsilon_1, \dots, \epsilon_N \sim N(0, \sigma^2)$$
 (iid)

In PROC GLMPOWER, the model parameters β are not specified directly, but rather indirectly as y^* , which represents either conjectured response means or typical response values for each design profile. The y* values are manifested as the dependent variable in the MODEL statement. The vector $\boldsymbol{\beta}$ is obtained from \mathbf{y}^* according to the least squares equation,

$$\boldsymbol{\beta} = (\mathbf{X}'\mathbf{X})^{-}\mathbf{X}'\mathbf{y}^{\star}$$

Note that, in general, there is not a one-to-one mapping between y^* and β . Many different scenarios for y^* might lead to the same β . If you specify y^* with the intention of representing cell means, keep in mind that PROC GLMPOWER allows scenarios that are not valid cell means according to the model that is specified in the MODEL statement. For example, if y^* exhibits an interaction effect but the corresponding interaction term is left out of the model, then the cell means $(X\beta)$ that are derived from β differ from y^* . In particular, the cell means that are derived in this way are the projection of y^* onto the model space.

It is convenient in power analysis to parameterize the design matrix X in three parts, $\{\ddot{\mathbf{X}}, \mathbf{w}, N\}$, defined as follows:

- 1. The $q \times k$ essence design matrix $\ddot{\mathbf{X}}$ is the collection of unique rows of \mathbf{X} . Its rows are sometimes referred to as "design profiles." Here, $q \leq N$ is defined simply as the number of unique rows of \mathbf{X} .
- 2. The $q \times 1$ weight vector w reveals the relative proportions of design profiles, and $\mathbf{W} = \operatorname{diag}(\mathbf{w})$. Row i of $\ddot{\mathbf{X}}$ is to be included in the design w_i times for every w_j times that row j is included. The weights are assumed to be standardized (that is, they sum up to 1).
- 3. The total sample size is N. This is the number of rows in X. If you gather $Nw_i = n_i$ copies of the ith row of \ddot{X} , for $i = 1, \ldots, q$, then you end up with X.

The preceding quantities are derived from PROC GLMPOWER syntax as follows:

- Values for $\ddot{\mathbf{X}}$, \mathbf{y}^{\star} , and \mathbf{w} are specified in the exemplary data set (from using the DATA= option in the PROC GLMPOWER statement), and the corresponding variables are identified in the CLASS, MODEL, and WEIGHT statements.
- *N* is specified in the NTOTAL= option in the POWER statement.

It is useful to express the crossproduct matrix X'X in terms of these three parts,

$$X'X = N\ddot{X}'W\ddot{X}$$

because this expression factors out the portion (N) that depends on sample size and the portion $(\ddot{\mathbf{X}}'\mathbf{W}\ddot{\mathbf{X}})$ that depends only on the design structure.

A general linear hypothesis for the univariate model has the form

$$H_0: \mathbf{L}\boldsymbol{\beta} = \boldsymbol{\theta}_0$$

 $H_A: \mathbf{L}\boldsymbol{\beta} \neq \boldsymbol{\theta}_0$

where L is an $l \times k$ contrast matrix with rank r_L and θ_0 is the null value (usually just a vector of zeros).

Note that model effect tests are just contrasts that use special forms of L. Thus, this scheme covers both effect tests (which are specified in the MODEL statement and the EFFECTS= option in the POWER statement) and custom contrasts (which are specified in the CONTRAST statement).

The model degrees of freedom DF_M are equal to the rank of X, denoted r_X . The error degrees of freedom DF_E are equal to $N - r_X$. The sample size N must be at least DF_M plus the number of covariates.

The test statistic is

$$F = \frac{\left(\frac{SS_H}{r_L}\right)}{\hat{\sigma}^2}$$

where

$$SS_{H} = \frac{1}{N} \left(\mathbf{L} \hat{\boldsymbol{\beta}} - \boldsymbol{\theta}_{0} \right)' \left(\mathbf{L} \left(\mathbf{X}' \mathbf{X} \right)^{-} \mathbf{L}' \right)^{-1} \left(\mathbf{L} \hat{\boldsymbol{\beta}} - \boldsymbol{\theta}_{0} \right)$$
$$\hat{\boldsymbol{\beta}} = (\mathbf{X}' \mathbf{X})^{-} \mathbf{X}' \mathbf{y}$$
$$\hat{\sigma}^{2} = \frac{1}{DF_{E}} \left(\mathbf{y} - \mathbf{X} \hat{\boldsymbol{\beta}} \right)' \left(\mathbf{y} - \mathbf{X} \hat{\boldsymbol{\beta}} \right)$$

Under H_0 , $F \sim F(r_L, DF_E)$. Under H_A , F is distributed as $F(r_L, DF_E, \lambda)$ with noncentrality

$$\lambda = N \left(\mathbf{L} \boldsymbol{\beta} - \boldsymbol{\theta}_0 \right)' \left(\mathbf{L} \left(\ddot{\mathbf{X}}' \mathbf{W} \ddot{\mathbf{X}} \right)^{-1} \mathbf{L}' \right)^{-1} \left(\mathbf{L} \boldsymbol{\beta} - \boldsymbol{\theta}_0 \right) \sigma^{-2}$$

The value of σ is specified in the STDDEV= option in the POWER statement.

Muller and Peterson (1984) give the exact power of the test as

power =
$$P(F(r_L, DF_E, \lambda) \ge F_{1-\alpha}(r_L, DF_E))$$

The value of α is specified in the ALPHA= option in the POWER statement.

Sample size is computed by inverting the power equation.

See Muller and Benignus (1992) and O'Brien and Shieh (1992) for additional discussion.

Adjustments for Covariates in Univariate Models

If you specify covariates in a univariate model (whether continuous or categorical), then two adjustments are made in order to compute approximate power in the presence of the covariates. Let n_{ν} denote the number of covariates (counting dummy variables for categorical covariates individually) as specified in the NCOVARIATES= option in the POWER statement. In other words, n_{ν} is the total degrees of freedom used by the covariates. The adjustments are as follows:

- 1. The error degrees of freedom decrease by n_{ν} .
- 2. The error standard deviation σ shrinks by a factor of $(1 \rho^2)^{\frac{1}{2}}$ (if the CORRXY= option is used to specify the correlation ρ between covariates and response) or $(1-r)^{\frac{1}{2}}$ (if the PROPVARREDUCTION= option is used to specify the proportional reduction in total R^2 incurred by the covariates). Let σ^* represent the updated value of σ .

As a result of these changes, the power is computed as

power =
$$P\left(F(r_L, \mathrm{DF_E} - n_{\nu}, \lambda^{\star}) \geq F_{1-\alpha}(r_L, N - r_x - n_{\nu})\right)$$

where λ^* is calculated using σ^* rather than σ :

$$\lambda^{\star} = N \left(\mathbf{L} \boldsymbol{\beta} - \boldsymbol{\theta}_0 \right)' \left(\mathbf{L} \left(\ddot{\mathbf{X}}' \mathbf{W} \ddot{\mathbf{X}} \right)^{-1} \mathbf{L}' \right)^{-1} \left(\mathbf{L} \boldsymbol{\beta} - \boldsymbol{\theta}_0 \right) (\sigma^{\star})^{-2}$$

Contrasts in Fixed-Effect Multivariate Models

The multivariate model has the form

$$Y = X\beta + \epsilon$$

where **Y** is the $N \times p$ vector of responses, for p > 1; **X** is the $N \times k$ design matrix; β is the $k \times p$ matrix of model parameters that correspond to the columns of **X** and **Y**; and ϵ is an $N \times p$ vector of errors, where

$$\epsilon_1, \dots, \epsilon_N \sim N(0, \Sigma)$$
 (iid)

In PROC GLMPOWER, the model parameters β are not specified directly, but rather indirectly as Y^* , which represents either conjectured response means or typical response values for each design profile. The Y* values are manifested as the collection of dependent variables in the MODEL statement. The matrix β is obtained from Y^{*} according to the least squares equation,

$$\boldsymbol{\beta} = (\mathbf{X}'\mathbf{X})^{-}\mathbf{X}'\mathbf{Y}^{\star}$$

Note that, in general, there is not a one-to-one mapping between Y^* and β . Many different scenarios for Y^* might lead to the same β . If you specify Y^* with the intention of representing cell means, keep in mind that PROC GLMPOWER allows scenarios that are not valid cell means according to the model that is specified in the MODEL statement. For example, if Y^* exhibits an interaction effect but the corresponding interaction term is left out of the model, then the cell means $(X\beta)$ that are derived from β differ from Y^* . In particular, the cell means that are derived in this way are the projection of Y^* onto the model space.

It is convenient in power analysis to parameterize the design matrix X in three parts, $\{\ddot{X}, W, N\}$, defined as follows:

- 1. The $q \times k$ essence design matrix $\ddot{\mathbf{X}}$ is the collection of unique rows of \mathbf{X} . Its rows are sometimes referred to as "design profiles." Here, $q \leq N$ is defined simply as the number of unique rows of X.
- 2. The $q \times 1$ weight vector w reveals the relative proportions of design profiles, and $\mathbf{W} = \operatorname{diag}(\mathbf{w})$. Row i of X is to be included in the design w_i times for every w_i times that row j is included. The weights are assumed to be standardized (that is, they sum up to 1).
- 3. The total sample size is N. This is the number of rows in X. If you gather $Nw_i = n_i$ copies of the ith row of $\ddot{\mathbf{X}}$, for $i = 1, \dots, q$, then you end up with \mathbf{X} .

The preceding quantities are derived from PROC GLMPOWER syntax as follows:

- Values for \ddot{X} , Y^* , and w are specified in the exemplary data set (from using the DATA= option in the PROC GLMPOWER statement), and the corresponding variables are identified in the CLASS, MODEL, and WEIGHT statements.
- N is specified in the NTOTAL= option in the POWER statement.

It is useful to express the crossproduct matrix X'X in terms of these three parts,

$$\mathbf{X}'\mathbf{X} = N\ddot{\mathbf{X}}'\mathbf{W}\ddot{\mathbf{X}}$$

because this expression factors out the portion (N) that depends on sample size and the portion $(\ddot{\mathbf{X}}'\mathbf{W}\ddot{\mathbf{X}})$ that depends only on the design structure.

A general linear hypothesis for the univariate model has the form

$$H_0: \mathbf{L}\boldsymbol{\beta}\mathbf{M} = \boldsymbol{\theta}_0$$

 $H_A: \mathbf{L}\boldsymbol{\beta}\mathbf{M} \neq \boldsymbol{\theta}_0$

where L is an $l \times k$ between-subject contrast matrix with rank r_L , M is a $p \times m$ within-subject contrast matrix with rank r_M , and θ_0 is an $l \times m$ null contrast matrix (usually just a matrix of zeros).

Note that model effect tests are just between-subject contrasts that use special forms of L, combined with an M that is the $p \times 1$ mean transformation vector of the dependent variables (a vector of values all equal to 1/p). Thus, this scheme covers both effect tests (which are specified in the MODEL statement and the EFFECTS= option in the POWER statement) and custom between-subject contrasts (which are specified in the CONTRAST statement).

The M matrix is often referred to as the dependent variable transformation and is specified in the MANOVA or REPEATED statement.

The model degrees of freedom DF_M are equal to the rank of X, denoted r_X . The error degrees of freedom DF_E are equal to $N - r_X$.

The hypothesis sum of squares SS_H in the univariate model generalizes to the hypothesis SSCP matrix in the multivariate model,

$$\mathbf{H} = \left(\mathbf{L}\hat{\boldsymbol{\beta}}\mathbf{M} - \boldsymbol{\theta}_0\right)' \left(\mathbf{L} \left(\mathbf{X}'\mathbf{X}\right)^{-1} \mathbf{L}'\right)^{-1} \left(\mathbf{L}\hat{\boldsymbol{\beta}}\mathbf{M} - \boldsymbol{\theta}_0\right)$$

The error sum of squares $\hat{\sigma}^2(N-r_X)$ in the univariate model generalizes to the error SSCP matrix in the multivariate model,

$$\mathbf{E} = (N - r_X)\mathbf{M}'\hat{\mathbf{\Sigma}}\mathbf{M}$$

where

$$\hat{\mathbf{\Sigma}} = \left(\mathbf{Y} - \mathbf{X}\hat{\boldsymbol{\beta}}\right)' \left(\mathbf{Y} - \mathbf{X}\hat{\boldsymbol{\beta}}\right) / (N - r_X)$$

and

$$\hat{\boldsymbol{\beta}} = (\mathbf{X}'\mathbf{X})^{-}\mathbf{X}'\mathbf{Y}$$

The population counterpart of \mathbf{H}/N is

$$\mathbf{H}^{\star} = (\mathbf{L}\boldsymbol{\beta}\mathbf{M} - \boldsymbol{\theta}_0)' \left(\mathbf{L} \left(\ddot{\mathbf{X}}'\mathbf{W}\ddot{\mathbf{X}}\right)^{-} \mathbf{L}'\right)^{-1} (\mathbf{L}\boldsymbol{\beta}\mathbf{M} - \boldsymbol{\theta}_0)$$

and the population counterpart of \mathbf{E}/N is

$$\mathbf{E}^{\star} = \mathbf{M}' \mathbf{\Sigma} \mathbf{M}$$

The elements of Σ are specified in the MATRIX= and STDDEV= options and identified in the CORRMAT=, CORRS=, COVMAT=, and SQRTVAR= options in the POWER statement.

The power and sample size computations for all the tests that are supported in the MTEST= option in the POWER statement are based on \mathbf{H}^{\star} and \mathbf{E}^{\star} . The following two subsections cover the computational methods and formulas for the multivariate and univariate tests that are supported in the MTEST= and UEPSDEF= options in the POWER statement.

Multivariate Tests

Power computations for multivariate tests are based on O'Brien and Shieh (1992) (for METHOD=OBRIENSHIEH) and Muller and Peterson (1984) (for METHOD=MULLERPETERSON).

Let $s = \min(r_L, r_M)$, the smaller of the between-subject and within-subject contrast degrees of freedom. Critical value computations assume that under H_0 , the test statistic F is distributed as $F(r_L r_M, v_2)$, where $v_2 = (N - r_X) - r_M + 1$ if s = 1 but depends on the choice of test if s > 1. Power computations assume

that under H_A , F is distributed as $F(r_L r_M, v_2, \lambda)$, where the noncentrality λ depends on r_L , r_M , the choice of test, and the power computation method.

Formulas for the test statistic F, denominator degrees of freedom v_2 , and noncentrality λ for all combinations of dimensions, tests, and methods are given in the following subsections.

The power in each case is computed as

power =
$$P(F(r_L r_M, \nu_2, \lambda) \ge F_{1-\alpha}(r_L r_M, \nu_2))$$

Computed power is exact for some cases and approximate for others. Sample size is computed by inverting the power equation.

Let $\Delta = \mathbf{E}^{-1}\mathbf{H}$, and define ϕ as the $s \times 1$ vector of ordered positive eigenvalues of Δ , $\phi = {\phi_1, \dots, \phi_s}$, where $\phi_1 \ge \dots \ge \phi_s > 0$. The population equivalent is

$$\begin{split} \boldsymbol{\Delta}^{\star} &= \mathbf{E}^{\star^{-1}} \mathbf{H}^{\star} \\ &= \left(\mathbf{M}' \boldsymbol{\Sigma} \mathbf{M} \right)^{-1} (\mathbf{L} \boldsymbol{\beta} \mathbf{M} - \boldsymbol{\theta}_0)' \left(\mathbf{L} \left(\ddot{\mathbf{X}}' \mathbf{W} \ddot{\mathbf{X}} \right)^{-1} \mathbf{L}' \right)^{-1} (\mathbf{L} \boldsymbol{\beta} \mathbf{M} - \boldsymbol{\theta}_0) \end{split}$$

where ϕ^* is the $s \times 1$ vector of ordered positive eigenvalues of Δ^* , $\phi^* = \{\phi_1^*, \dots, \phi_s^*\}$ for $\phi_1^* \ge \dots \ge \phi_s^* > 0$.

Case 1: s = 1

When s=1, all three multivariate tests (MTEST=HLT, MTEST=PT, and MTEST=WILKS) are equivalent. The test statistic is $F=\phi_1\nu_2/(r_Lr_M)$, where $\nu_2=(N-r_X)-r_M+1$.

When the dependent variable transformation has a single degree of freedom ($r_M = 1$), METHOD=OBRIENSHIEH and METHOD=MULLERPETERSON are the same, computing exact power by using noncentrality $\lambda = N \Delta^*$. The sample size must satisfy $N \ge r_X + 1$.

When the dependent variable transformation has more than one degree of freedom but the between-subject contrast has a single degree of freedom ($r_M > 1, r_L = 1$), METHOD=OBRIENSHIEH computes exact power by using noncentrality $\lambda = N\phi_1^{\star}$, and METHOD=MULLERPETERSON computes approximate power by using

$$\lambda = \frac{(N - r_X) - r_M + 1}{(N - r_X)} N \phi_1^*$$

The sample size must satisfy $N \ge r_X + r_M$.

Case 2: s > 1

When both the dependent variable transformation and the between-subject contrast have more than one degree of freedom (s > 1), METHOD=OBRIENSHIEH computes the noncentrality as $\lambda = N\lambda^*$, where λ^* is the primary noncentrality. The form of λ^* depends on the choice of test statistic.

METHOD=MULLERPETERSON computes the noncentrality as $\lambda = \nu_2 \lambda^{(MP)^*}$, where $\lambda^{(MP)^*}$ has the same form as λ^* except that ϕ^* is replaced by

$$\phi^{(\mathrm{MP})^{\star}} = \frac{N}{(N-r_X)} \phi^{\star}$$

Computed power is approximate for both methods when s > 1.

Hotelling-Lawley Trace (MTEST=HLT) When s > 1

If $N > r_X + r_M + 1$, then the denominator degrees of freedom for the Hotelling-Lawley trace are $v_2 = v_{2a}$,

$$v_{2a} = 4 + (r_L r_M + 2)g$$

where

$$g = \frac{(N - r_X)^2 - (N - r_X)(2r_M + 3) + r_M(r_M + 3)}{(N - r_X)(r_L + r_M + 1) - (r_L + 2r_M + r_M^2 - 1)}$$

which is the same as $v_2^{(T_2)}$ in O'Brien and Shieh (1992) and is due to McKeon (1974).

If $N \le r_X + r_M + 1$, then $v_2 = v_{2b}$,

$$v_{2h} = s((N - r_X) - r_M - 1) + 2$$

which is the same as both $v_2^{(T_1)}$ in O'Brien and Shieh (1992) and v_2 in Muller and Peterson (1984) and is due to Pillai and Samson (1959).

The primary noncentrality is

$$\lambda^{\star} = \sum_{i=1}^{s} \phi_{i}^{\star}$$

The sample size must satisfy

$$N > r_X + r_M + 1 - 2/s$$

If $N > r_X + r_M + 1$, then the test statistic is

$$F = \frac{U/v_1}{c/v_{2a}}$$

where

$$U = \operatorname{trace}(\mathbf{E}^{-1}\mathbf{H})$$
$$= \sum_{i=1}^{s} \phi_{i}$$

and

$$c = \frac{2 + (r_L r_M + 2)g}{N - r_X - r_M - 1}$$

If $N \le r_X + r_M + 1$, then the test statistic is

$$F = \frac{U/v_1}{s/v_{2h}}$$

Pillai's Trace (MTEST=PT) When s > 1

The denominator degrees of freedom for Pillai's trace are

$$v_2 = s((N - r_X) + s - r_M)$$

The primary noncentrality is

$$\lambda^* = s \left(\frac{\sum_{i=1}^s \frac{\phi_i^*}{1 + \phi_i^*}}{s - \sum_{i=1}^s \frac{\phi_i^*}{1 + \phi_i^*}} \right)$$

The sample size must satisfy

$$N \ge r_X + r_M + 1/s - s$$

The test statistic is

$$F = \frac{V/v_1}{(s-V)/v_2}$$

where

$$V = \operatorname{trace} (\mathbf{H}(\mathbf{H} + \mathbf{E})^{-1})$$
$$= \sum_{i=1}^{s} \frac{\phi_i}{1 + \phi_i}$$

Wilks' Lambda (MTEST=WILKS) When s > 1

The denominator degrees of freedom for Wilks' lambda are

$$v_2 = t \left[(N - r_X) - 0.5(r_M - r_L + 1) \right] - 0.5(r_L r_M - 2)$$

where

$$t = \begin{cases} 1 & \text{if } r_L r_M \le 3\\ \left[\frac{(r_L r_M)^2 - 4}{r_L^2 + r_M^2 - 5}\right]^{\frac{1}{2}} & \text{if } r_L r_M \ge 4 \end{cases}$$

The primary noncentrality is

$$\lambda^{\star} = t \left[\left(\prod_{i=1}^{s} \left[(1 + \phi_i^{\star})^{-1} \right] \right)^{-\frac{1}{t}} - 1 \right]$$

The sample size must satisfy

$$N \ge (1 + 0.5(r_L r_M - 2))/t + r_X + (r_M - r_L + 1)/2$$

The test statistic is

$$F = \frac{(1 - \Lambda^{1/t})/\nu_1}{\Lambda^{1/t}/\nu_2}$$

where

$$\Lambda = \det(\mathbf{E})/\det(\mathbf{H} + \mathbf{E})$$
$$= \prod_{i=1}^{s} \left[(1 + \phi_i)^{-1} \right]$$

Univariate Tests

Power computations for univariate tests are based on Muller et al. (2007) and Muller and Barton (1989).

The test statistic is

$$F = \frac{\operatorname{trace}(\mathbf{H})/r_L}{\operatorname{trace}(\mathbf{E})/(N - r_X)}$$

Critical value computations assume that under H_0 , F is distributed as $F(v_1, v_2)$, where v_1 and v_2 depend on the choice of test.

The four tests for the univariate approach to repeated measures differ in their assumptions about the sphericity ε of \mathbf{E}^{\star} ,

$$\varepsilon = \frac{\operatorname{trace}^{2}(\mathbf{E}^{\star})}{r_{M}\operatorname{trace}(\mathbf{E}^{\star 2})}$$

Power computations assume that under H_A , F is distributed as $F(v_1^{\star}, v_2^{\star}, \lambda)$.

Formulas for v_1 and v_2 for each test and formulas for v_1^{\star} , v_2^{\star} , and λ are given in the following subsections.

The power in each case is approximated as

power =
$$P(F(v_1^*, v_2^*, \lambda) \ge F_{1-\alpha}(v_1, v_2))$$

Sample size is computed by inverting the power equation.

The sample size must be large enough to yield $\nu_1 > 0$, $\nu_1^* > 0$, $\nu_2 \ge 1$, and $\nu_2^* \ge 1$.

Because these univariate tests are biased, the achieved significance level might differ from the nominal significance level. The actual alpha is computed in the same way as the power, except that the noncentrality parameter λ is set to 0.

Define $\phi^{(E)}$ as the vector of ordered eigenvalues of \mathbf{E}^{\star} , $\phi^{(E)} = \{\phi_1^{(E)}, \dots, \phi_{r_M}^{(E)}\}$, where $\phi_1^{(E)} \geq \dots \geq \phi_{r_M}^{(E)}$, and define $\gamma_j^{(E)}$ as the jth eigenvector of \mathbf{E}^{\star} . Critical values and power computations are based on the following intermediate parameters:

$$\omega_{*j} = N \left(\mathbf{\gamma}_{j}^{(\mathrm{E})} \right)' \mathbf{H}^{\star} \mathbf{\gamma}_{j}^{(\mathrm{E})} / \phi_{j}^{(\mathrm{E})}$$

$$S_{t1} = \sum_{j=1}^{r_M} \phi_j^{(E)}$$

$$S_{t2} = \sum_{j=1}^{r_M} \phi_j^{(E)} \omega_{*j}$$

$$S_{t3} = \sum_{j=1}^{r_M} \left(\phi_j^{(E)}\right)^2$$

$$S_{t4} = \sum_{i=1}^{r_M} \left(\phi_j^{(E)}\right)^2 \omega_{*j}$$

$$R_{*1} = \frac{r_L S_{t3} + 2S_{t4}}{r_L S_{t1} + 2S_{t2}}$$

$$R_{*2} = \frac{S_{t3}}{S_{t1}}$$

$$E(t_1) = 2(N - r_X)S_{t3} + (N - r_X)^2 S_{t1}^2$$

$$E(t_2) = (N - r_X)((N - r_X) + 2)S_{t3} + 2(N - r_X) \sum_{j_1=2}^{r_M} \sum_{j_2=1}^{j_1-1} \phi_{j_1}^{(E)} \phi_{j_2}^{(E)}$$

The degrees of freedom and noncentrality in the noncentral F approximation of the test statistic are computed as follows:

$$v_{1}^{\star} = \frac{r_{L}S_{t1}}{R_{*1}}$$

$$v_{2}^{\star} = \frac{(N - r_{X})S_{t1}}{R_{*2}}$$

$$\lambda = \frac{S_{t2}}{R_{*1}}$$

Uncorrected Test

The uncorrected test assumes sphericity $\varepsilon = 1$, in which case the null F distribution is exact, with the following degrees of freedom:

$$v_1 = r_L r_M$$
$$v_2 = r_M (N - r_X)$$

Greenhouse-Geisser Adjustment (MTEST=UNCORR)

The Greenhouse-Geisser adjustment to the uncorrected test reduces degrees of freedom by the MLE $\hat{\epsilon}$ of the sphericity,

$$\hat{\varepsilon} = \frac{\operatorname{trace}^{2}(\mathbf{E})}{r_{M}\operatorname{trace}(\mathbf{E}^{2})}$$

An approximation for the expected value of $\hat{\varepsilon}$ is used to compute the degrees of freedom for the null F distribution,

$$v_1 = r_L r_M E(\hat{\varepsilon})$$

$$v_2 = r_M (N - r_X) E(\hat{\varepsilon})$$

where

$$E(\hat{\varepsilon}) = \frac{E(t_1)}{r_M E(t_2)}$$

Huynh-Feldt Adjustments (MTEST=HF)

The Huynh-Feldt adjustment reduces degrees of freedom by a nearly unbiased estimate $\tilde{\varepsilon}$ of the sphericity,

$$\tilde{\varepsilon} = \begin{cases} \frac{Nr_M \hat{\varepsilon} - 2}{r_M [(N - r_X) - r_M \hat{\varepsilon}]} & \text{if UEPSDEF=HF} \\ \frac{(N - r_X + 1)r_M \hat{\varepsilon} - 2}{r_M [(N - r_X) - r_M \hat{\varepsilon}]} & \text{if UEPSDEF=HFL} \\ \left(\frac{(v_a - 2)(v_a - 4)}{v_a^2}\right) \left(\frac{(N - r_X + 1)r_M \hat{\varepsilon} - 2}{r_M [(N - r_X) - r_M \hat{\varepsilon}]}\right) & \text{if UEPSDEF=CM} \end{cases}$$

where

$$v_a = (N - r_X - 1) + (N - r_X)(N - r_X - 1)/2$$

The value of $\tilde{\varepsilon}$ is truncated if necessary to be at least $1/r_M$ and at most 1.

An approximation for the expected value of $\tilde{\varepsilon}$ is used to compute the degrees of freedom for the null F distribution,

$$\begin{aligned} v_1 &= r_L r_M \mathbf{E_t}(\tilde{\varepsilon}) \\ v_2 &= r_M (N - r_X) \mathbf{E_t}(\tilde{\varepsilon}) \end{aligned}$$

where

$$E_{t}(\tilde{\varepsilon}) = \min(\max(E(\tilde{\varepsilon}), 1/r_{M}), 1)$$

and

$$\mathbf{E}(\tilde{\varepsilon}) = \begin{cases} \frac{N\mathbf{E}(t_1) - 2\mathbf{E}(t_2)}{r_M[(N - r_X)\mathbf{E}(t_2) - \mathbf{E}(t_1)]} & \text{if UEPSDEF=HF} \\ \frac{(N - r_X + 1)\mathbf{E}(t_1) - 2\mathbf{E}(t_2)}{r_M[(N - r_X)\mathbf{E}(t_2) - \mathbf{E}(t_1)]} & \text{if UEPSDEF=HFL} \\ \left(\frac{(v_a - 2)(v_a - 4)}{v_a^2}\right) \left(\frac{(N - r_X + 1)\mathbf{E}(t_1) - 2\mathbf{E}(t_2)}{r_M[(N - r_X)\mathbf{E}(t_2) - \mathbf{E}(t_1)]}\right) & \text{if UEPSDEF=CM} \end{cases}$$

Box Conservative Test (MTEST=BOX)

The Box conservative test assumes the worst case for sphericity, $\varepsilon = 1/r_M$, leading to the following degrees of freedom for the null F distribution:

$$v_1 = r_L$$

$$v_2 = (N - r_X)$$

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, "Statistical Graphics Using ODS."

Before you create graphs, ODS Graphics must be enabled (for example, by specifying the ODS GRAPH-ICS ON statement). For more information about enabling and disabling ODS Graphics, see the section "Enabling and Disabling ODS Graphics" on page 606 in Chapter 21, "Statistical Graphics Using ODS."

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section "A Primer on ODS Statistical Graphics" on page 605 in Chapter 21, "Statistical Graphics Using ODS."

If ODS Graphics is not enabled, then PROC GLMPOWER creates traditional graphics.

You can reference every graph produced through ODS Graphics with a name. The names of the graphs that PROC GLMPOWER generates are listed in Table 46.8, along with the required statements and options.

ODS Graph Name	Plot Description	Option
PowerPlot	Plot with power and sample size on the axes	PLOT
PowerAbort	Empty plot that shows an error message when a plot could not be produced	PLOT

Table 46.8 Graphs Produced by PROC GLMPOWER

Examples: GLMPOWER Procedure

Example 46.1: One-Way ANOVA

This example deals with the same situation as in Example 75.1 in Chapter 75, "The POWER Procedure."

Hocking (1985, p. 109) describes a study of the effectiveness of electrolytes in reducing lactic acid buildup for long-distance runners. You are planning a similar study in which you will allocate five different fluids to runners on a 10-mile course and measure lactic acid buildup immediately after the race. The fluids consist of water and two commercial electrolyte drinks, EZDure and LactoZap, each prepared at two concentrations, low (EZD1 and LZ1) and high (EZD2 and LZ2).

You conjecture that the standard deviation of lactic acid measurements given any particular fluid is about 3.75, and that the expected lactic acid values will correspond roughly to Table 46.9. You are least familiar with the LZ1 drink and hence decide to consider a range of reasonable values for that mean.

Table 46.9 Mean Lactic Acid Buildup by Fluid

Water	EZD1	EZD2	LZ1	LZ2
35.6	33.7	30.2	29 or 28	25.9

You are interested in four different comparisons, shown in Table 46.10 with appropriate contrast coefficients.

Table 46.10 Planned Comparisons

	Contrast Coefficients				
Comparison	Water	EZD1	EZD2	LZ1	LZ2
Water versus electrolytes	4	-1	-1	-1	-1
EZD versus LZ	0	1	1	-1	-1
EZD1 versus EZD2	0	1	-1	0	0
LZ1 versus LZ2	0	0	0	1	-1

For each of these contrasts you want to determine the sample size required to achieve a power of 0.9 for detecting an effect with magnitude in accord with Table 46.9. You are not yet attempting to choose a single sample size for the study, but rather checking the range of sample sizes needed for individual contrasts. You plan to test each contrast at $\alpha = 0.025$. In the interests of reducing costs, you will provide twice as many runners with water as with any of the electrolytes; that is, you will use a sample size weighting scheme of 2:1:1:1:1.

Before calling PROC GLMPOWER, you need to create the *exemplary data set* to specify means and weights for the design profiles:

```
data Fluids;
  input Fluid $ LacticAcid1 LacticAcid2 CellWqt;
  datalines;
        Water
                 35.6
                              35.6
                                         2
        EZD1
                  33.7
                             33.7
                                         1
        EZD2
                  30.2
                             30.2
                                         1
        LZ1
                  29
                             28
                                         1
        LZ2
                  25.9
                              25.9
                                         1
```

The variable LacticAcid1 represents the cell means scenario with the larger LZ1 mean (29), and LacticAcid2 represents the scenario with the smaller LZ1 mean (28). The variable CellWgt contains the sample size allocation weights.

Use the DATA= option in the PROC GLMPOWER statement to specify Fluids as the exemplary data set. The following statements perform the sample size analysis:

```
proc glmpower data=Fluids;
  class Fluid;
  model LacticAcid1 LacticAcid2 = Fluid;
  weight CellWgt;
  contrast "Water vs. others" Fluid -1 -1 -1 -1 4;
  contrast "EZD vs. LZ" Fluid 1 1 -1 -1 0;
  contrast "EZD1 vs. EZD2" Fluid 1 -1 0 0 0;
  contrast "LZ1 vs. LZ2" Fluid 0 0 1 -1 0;
  power
    stddev = 3.75
    alpha = 0.025
    ntotal = .
    power = 0.9;
run;
```

The CLASS statement identifies Fluid as a classification variable. The MODEL statement specifies the model and the two cell means scenarios LacticAcid1 and LacticAcid2. The WEIGHT statement identifies CellWgt as the weight variable. The CONTRAST statement specifies the contrasts. Since PROC GLMPOWER by default processes class levels in order of formatted values, the contrast coefficients correspond to the following order: EZD1, EZD2, LZ1, LZ2, Water. (Note: You could use the ORDER=DATA option in the PROC GLMPOWER statement to achieve the same ordering as in Table 46.10 instead.) The POWER statement specifies total sample size as the result parameter and provides values for the other analysis parameters (error standard deviation, alpha, and power).

Output 46.1.1 displays the results.

Output 46.1.1 Sample Sizes for One-Way ANOVA Contrasts

		The	GLMPOWER Procedure	!			
		Fixed	l Scenario Elements				
	Wei	ght Variab	ple	Cell	-		
	Alp				025		
	Err	or Standar	d Deviation	3	3.75		
	Non	inal Power	•		0.9		
		_	computed N Total				
			ompaced N Total				
				Test	Error	Actual	1
Index	Dependent	Type	Source	DF	DF	Power	Tota
1	LacticAcid1	Effect	Fluid	4	25	0.958	3
_	LacticAcid1	Contrast	Water vs. others	1	25	0.947	3
2				1	55	0.929	6
3	LacticAcid1	Contrast	EZD VS. LZ		55	0.323	
_			EZD vs. LZ EZD1 vs. EZD2	_	169		17
3	LacticAcid1	Contrast		1		0.901	
3	LacticAcid1	Contrast Contrast	EZD1 vs. EZD2 LZ1 vs. LZ2	1	169	0.901 0.902	22
3 4 5	LacticAcid1 LacticAcid1 LacticAcid2	Contrast Contrast Effect	EZD1 vs. EZD2 LZ1 vs. LZ2	1 1 4	169 217	0.901 0.902 0.972	22: 3
3 4 5 6	LacticAcid1 LacticAcid1 LacticAcid2	Contrast Contrast Effect Contrast	EZD1 vs. EZD2 LZ1 vs. LZ2 Fluid Water vs. others	1 1 4	169 217 25	0.901 0.902 0.972 0.901	22: 3: 2:
3 4 5 6 7	LacticAcid1 LacticAcid1 LacticAcid2 LacticAcid2 LacticAcid2	Contrast Contrast Effect Contrast Contrast	EZD1 vs. EZD2 LZ1 vs. LZ2 Fluid Water vs. others	1 1 4 1	169 217 25 19	0.901 0.902 0.972 0.901 0.922	22: 30 24 43

The sample sizes range from 24 for the comparison of water versus electrolytes to 480 for the comparison of LZ1 versus LZ2, both assuming the smaller LZ1 mean. The sample size for the latter comparison is relatively large because the small mean difference of 28 - 25.9 = 2.1 is hard to detect. PROC GLMPOWER also includes the effect test for Fluid. Note that, in this case, it is equivalent to TEST=OVERALL_F in the ONEWAYANOVA statement of PROC POWER, since there is only one effect in the model.


The Nominal Power of 0.9 in the "Fixed Scenario Elements" table in Output 46.1.1 represents the input target power, and the Actual Power column in the "Computed N Total" table is the power at the sample size (N Total) adjusted to achieve the specified sample weighting. Note that all of the sample sizes are rounded up to multiples of 6 to preserve integer group sizes (since the group weights add up to 6). You can use the NFRACTIONAL option in the POWER statement to compute raw fractional sample sizes.

Suppose you want to plot the required sample size for the range of power values from 0.5 to 0.95. First, define the analysis by specifying the same statements as before, but add the PLOTONLY option to the PROC GLMPOWER statement to disable the nongraphical results. Next, specify the PLOT statement with X=POWER to request a plot with power on the X axis. (The result parameter—here sample size—is always plotted on the other axis.) Use the MIN= and MAX= options in the PLOT statement to specify the power range. The following statements produce the plot:

```
ods graphics on;
proc glmpower data=Fluids plotonly;
   class Fluid:
   model LacticAcid1 LacticAcid2 = Fluid;
   weight CellWgt;
```

```
contrast "Water vs. others" Fluid -1 -1 -1 -1 4;
   contrast "EZD vs. LZ"
                                Fluid
                                           1 -1 -1 0;
                                              0
                                                 0 0;
   contrast "EZD1 vs. EZD2"
                                Fluid
                                        1 -1
   contrast "LZ1 vs. LZ2"
                                Fluid
                                              1 -1 0;
   power
      stddev = 3.75
      alpha = 0.025
      ntotal = .
      power = 0.9;
  plot x=power min=.5 max=.95;
run;
```

Output 46.1.2 Plot of Sample Size versus Power for One-Way ANOVA Contrasts

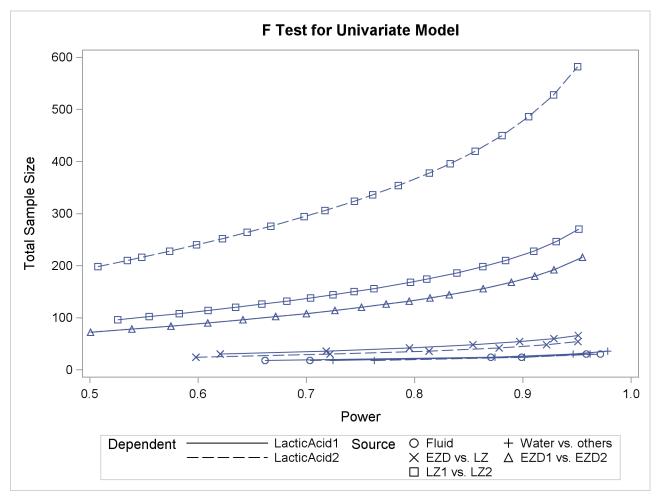

In Output 46.1.2, the line style identifies the cell means scenario, and the plotting symbol identifies the test. The plotting symbol locations identify actual computed powers; the curves are linear interpolations of these points. The plot shows that the required sample size is highest for the test of LZ1 versus LZ2, which was previously found to require the most resources.

Note that some of the plotted points in Output 46.1.2 are unevenly spaced. This is because the plotted points are the *rounded* sample size results at their corresponding *actual* power levels. The range specified with the MIN= and MAX= values in the PLOT statement corresponds to *nominal* power levels. In some cases, actual power is substantially higher than nominal power. To obtain plots with evenly spaced points (but with

fractional sample sizes at the computed points), you can use the NFRACTIONAL option in the POWER statement preceding the PLOT statement.


Finally, suppose you want to plot the power for the range of sample sizes you will likely consider for the study (the range of 24 to 480 that achieves 0.9 power for different comparisons). In the POWER statement, identify power as the result (POWER=.), and specify any total sample size value (say, NTOTAL=100). Specify the PLOT statement with X=N to request a plot with sample size on the X axis.

The following statements produce the plot:

```
proc glmpower data=Fluids plotonly;
  class Fluid;
  model LacticAcid1 LacticAcid2 = Fluid;
  weight CellWgt;
  contrast "Water vs. others" Fluid -1 -1 -1 -1 4;
  contrast "EZD vs. LZ" Fluid 1 1 -1 -1 0;
  contrast "EZD1 vs. EZD2" Fluid 1 -1 0 0 0;
  contrast "LZ1 vs. LZ2" Fluid 0 0 1 -1 0;
  power
     stddev = 3.75
     alpha = 0.025
     ntotal = 24
     power = .;
  plot x=n min=24 max=480;
run;
ods graphics off;
```

Note that the value 100 specified with the NTOTAL=100 option is not used. It is overridden in the plot by the MIN= and MAX= options in the PLOT statement, and the PLOTONLY option in the PROC GLMPOWER statement disables nongraphical results. But the NTOTAL= option (along with a value) is still needed in the POWER statement as a placeholder, to identify the desired parameterization for sample size.

See Output 46.1.3 for the plot.

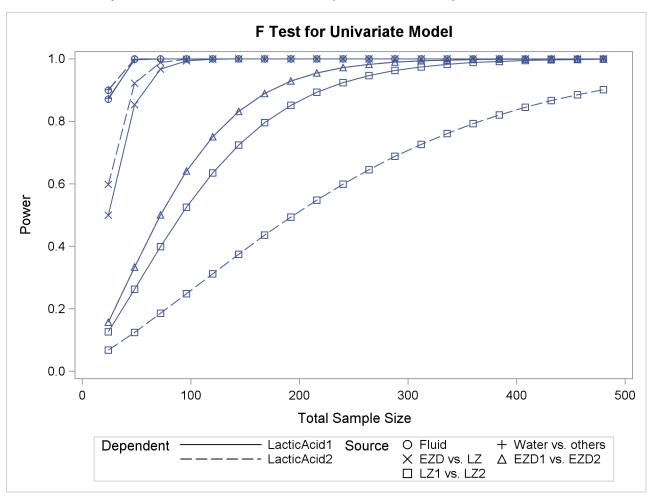

Output 46.1.3 Plot of Power versus Sample Size for One-Way ANOVA Contrasts

Although Output 46.1.2 and Output 46.1.3 surface essentially the same computations for practical power ranges, they each provide a different quick visual assessment. Output 46.1.2 reveals the range of required sample sizes for powers of interest, and Output 46.1.3 reveals the range of achieved powers for sample sizes of interest.

Example 46.2: Two-Way ANOVA with Covariate

Suppose you can enhance the planned study discussed in Example 46.1 in two ways:

- incorporate results from races at two different altitudes ("high" and "low")
- measure the body mass index of each runner before the race

This is equivalent to adding a second fixed effect and a continuous covariate to your model.

Since lactic acid buildup is more pronounced at higher altitudes, you will include altitude as a factor in the model along with fluid, extending the one-way ANOVA to a two-way ANOVA. In doing so, you expect to

High

Low

lower the residual standard deviation from about 3.75 to 3.5 (in addition to generalizing the study results). You assume there is negligible interaction between fluid and altitude and plan to use a main-effects-only model. You conjecture that the mean lactic acid buildup follows Table 46.11.

			Fluid		
Altitude	Water	EZD1	EZD2	LZ1	LZ2

35.0

32.4

31.5

28.9

30

27

27.1

24.7

36.9

34.3

Table 46.11 Mean Lactic Acid Buildup by Fluid and Altitude

By including a measurement of body mass index as a covariate in the study, you hope to further reduce the error variability. The extent of this reduction in variability is commonly expressed in two alternative ways: (1) the correlation between the covariates and the response or (2) the proportional reduction in total R square incurred by the covariates. You prefer the former and guess that the correlation between body mass index and lactic acid buildup is between 0.2 and 0.3. You specify these estimates with the NCOVARIATES= and CORRXY= options in the POWER statement. The covariate is not included in the MODEL statement.

You are interested in the same four fluid comparisons as in Example 46.1, shown in Table 46.10, except this time you want to marginalize over the effect of altitude.

For each of these contrasts, you want to determine the sample size required to achieve a power of 0.9 to detect an effect with magnitude according to Table 46.11. You are not yet attempting to choose a single sample size for the study, but rather checking the range of sample sizes needed by individual contrasts. You plan to test each contrast at $\alpha=0.025$. You will provide twice as many runners with water as with any of the electrolytes, and you predict that you can study approximately two-thirds as many runners at high altitude than at low altitude. The resulting planned sample size weighting scheme is shown in Table 46.12. Since the scheme is only approximate, you use the NFRACTIONAL option in the POWER statement to disable the rounding of sample sizes up to integers satisfying the weights exactly.

 Table 46.12
 Approximate Sample Size Allocation Weights

	Fluid					
Altitude	Water	EZD1	EZD2	LZ1	LZ2	
High	4	2	2	2	2	
Low	6	3	3	3	3	

First, you create the exemplary data set to specify means and weights for the design profiles:

data Fluids2; input Altitude \$ Fluid \$ LacticAcid CellWgt; datalines; 36.9 4 High Water High EZD1 35.0 2 31.5 2 High EZD2 2 High LZ1 30 2 27.1 High LZ2 34.3 6 Low Water 32.4 3 Low EZD1

Low	EZD2	28.9	3
Low	LZ1	27	3
Low	LZ2	24.7	3

The variables Altitude, Fluid, and LacticAcid specify the factors and cell means in Table 46.11. The variable CellWgt contains the sample size allocation weights in Table 46.12.

Use the DATA= option in the PROC GLMPOWER statement to specify Fluids2 as the exemplary data set. The following statements perform the sample size analysis:

```
proc glmpower data=Fluids2;
  class Altitude Fluid;
  model LacticAcid = Altitude Fluid;
  weight CellWgt;
  contrast "Water vs. others" Fluid -1 -1 -1 -1 4;
  contrast "EZD vs. LZ" Fluid 1 1 -1 -1 0;
  contrast "EZD1 vs. EZD2" Fluid 1 -1 0 0 0;
  contrast "LZ1 vs. LZ2" Fluid 0 0 1 -1 0;
  power
     nfractional
     stddev
               = 3.5
     ncovariates = 1
     corrxy = 0.2 0.3 0
     alpha
               = 0.025
     ntotal
               = .
     power
                = 0.9;
run;
```

The CLASS statement identifies Altitude and Fluid as classification variables. The MODEL statement specifies the model, and the WEIGHT statement identifies CellWgt as the weight variable. The CONTRAST statement specifies the contrasts in Table 46.10. As in Example 46.1, the order of the contrast coefficients corresponds to the formatted class levels (EZD1, EZD2, LZ1, LZ2, Water). The POWER statement specifies total sample size as the result parameter and provides values for the other analysis parameters. The NCOVARIATES= option specifies the single covariate (body mass index), and the CORRXY= option specifies the two scenarios for its correlation with lactic acid buildup (0.2 and 0.3). Output 46.2.1 displays the results.

Output 46.2.1 Sample Sizes for Two-Way ANOVA Contrasts

The GLMPOWER Procedure		
Fixed Scenario Elements		
Dependent Variable	LacticAcid	
Weight Variable	CellWgt	
Alpha	0.025	
Number of Covariates	1	
Std Dev Without Covariate Adjustment	3.5	
Nominal Power	0.9	

Output 46.2.1 continued

1 Ef 2 Ef 3 Ef 4 Ef 5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	ontrast ontrast ontrast ontrast ontrast ontrast	EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2	Adj Std Dev 3.43 3.34 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43 3.34 3.50	Test DF 1 1 4 4 1 1 1 1 1 1 1 1 1 1 1 1 1	Error DF 84 79 88 16 15 17 15 14 16 35 33 37 139 132 145 268 253 279	Fractiona N Tota 90.41845 85.86264 94.06398 22.44617 21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912 285.36397
1 Ef 2 Ef 3 Ef 4 Ef 5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	ffect ffect ffect ffect ffect ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Altitude Altitude Altitude Fluid Fluid Fluid Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0	3.43 3.34 3.50 3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.34 3.50 3.43	1 1 4 4 1 1 1 1 1 1 1 1	84 79 88 16 15 17 15 14 16 35 33 37 139 132 145 268 253	90.41845 85.86264 94.06398 22.44617 21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
2 Ef 3 Ef 4 Ef 5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ffect ffect ffect ffect ffect ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Altitude Altitude Fluid Fluid Fluid Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2	3.34 3.50 3.43 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43	1 4 4 1 1 1 1 1 1 1 1	79 88 16 15 17 15 14 16 35 33 37 139 132 145 268 253	85.86264 94.06398 22.44617 21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500
3 Ef 4 Ef 5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	ffect ffect ffect ffect ontrast	Altitude Fluid Fluid Fluid Water vs. others Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3	3.50 3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.34 3.50 3.43 3.34 3.50	1 4 4 1 1 1 1 1 1 1 1 1	88 16 15 17 15 14 16 35 33 37 139 132 145 268 253	94.06398 22.44617 21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500
4 Ef 5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	ffect ffect ffect ontrast	Fluid Fluid Fluid Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3	3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43	4 4 1 1 1 1 1 1 1 1 1	16 15 17 15 14 16 35 33 37 139 132 145 268 253	22.44617 21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500
5 Ef 6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	ffect ffect ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Fluid Fluid Water vs. others Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0	3.34 3.50 3.43 3.50 3.43 3.34 3.50 3.43 3.34 3.50 3.43	4 4 1 1 1 1 1 1 1 1 1	15 17 15 14 16 35 33 37 139 132 145 268 253	21.68754 23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
6 Ef 7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co	entrast cont	Fluid Water vs. others Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0	3.50 3.43 3.34 3.50 3.43 3.50 3.43 3.34 3.50 3.43 3.34	4 1 1 1 1 1 1 1 1 1	17 15 14 16 35 33 37 139 132 145 268 253	23.05571 21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
7 Co 8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Water vs. others Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2	3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.50 3.43 3.34	1 1 1 1 1 1 1 1 1 1	15 14 16 35 33 37 139 132 145 268 253	21.72019 20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
8 Co 9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Water vs. others Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2	3.34 3.50 3.43 3.34 3.50 3.43 3.50 3.43 3.34	1 1 1 1 1 1 1 1 1	14 16 35 33 37 139 132 145 268 253	20.84880 22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
9 Co 10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast ontrast ontrast ontrast	Water vs. others EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.0 0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3	3.50 3.43 3.34 3.50 3.43 3.50 3.43 3.34	1 1 1 1 1 1 1 1	16 35 33 37 139 132 145 268 253	22.42238 41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500
10 Co 11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast ontrast ontrast	EZD vs. LZ EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0 0.2 0.3 0.0 0.2 0.3	3.43 3.34 3.50 3.43 3.34 3.50 3.43 3.34	1 1 1 1 1 1	35 33 37 139 132 145 268 253	41.65742 39.67403 43.24641 145.61365 138.17398 151.56591 274.05500
11 Co 12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast ontrast	EZD vs. LZ EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3 0.0 0.2 0.3	3.34 3.50 3.43 3.34 3.50 3.43 3.34	1 1 1 1 1 1	33 37 139 132 145 268 253	39.67403 43.24641 145.61365 138.17398 151.56591 274.05500 259.91912
12 Co 13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast ontrast	EZD vs. LZ EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.0 0.2 0.3 0.0 0.2 0.3	3.50 3.43 3.34 3.50 3.43 3.34	1 1 1 1 1	37 139 132 145 268 253	43.2464 145.6136 138.17398 151.5659 274.05500 259.91912
13 Co 14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast ontrast	EZD1 vs. EZD2 EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0 0.2 0.3	3.43 3.34 3.50 3.43 3.34	1 1 1 1	139 132 145 268 253	145.61365 138.17398 151.56591 274.05500 259.91912
14 Co 15 Co 16 Co 17 Co	ontrast ontrast ontrast	EZD1 vs. EZD2 EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.3 0.0 0.2 0.3	3.34 3.50 3.43 3.34	1 1 1	132 145 268 253	138.17398 151.56591 274.05500 259.91912
15 Co 16 Co 17 Co	ontrast ontrast ontrast	EZD1 vs. EZD2 LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.0 0.2 0.3 0.0	3.50 3.43 3.34	1 1 1	145 268 253	151.56591 274.05500 259.91912
16 Co 17 Co	ontrast ontrast	LZ1 vs. LZ2 LZ1 vs. LZ2 LZ1 vs. LZ2	0.2 0.3 0.0	3.43 3.34	1 1	268 253	274.05500 259.91912
17 Co	ontrast	LZ1 vs. LZ2 LZ1 vs. LZ2	0.3	3.34	1	253	259.91912
		LZ1 vs. LZ2	0.0				
18 Co	ontrast			3.50	1	279	285.3639
		Computed C					
		Ac	tual	Ceiling	3		
		Index P	ower	N Total	L		
		1 0	. 902	91	L		
		2 0	.901	86	5		
		3 0	. 903	95	5		
		4 0	. 912	23	3		
			. 908	22	2		
		6 0	.919	24			
			. 905	22			
			. 903	21			
			.910	23			
			. 903	42			
			. 903	40			
			. 906	4.4			
			.901	146			
			. 902	139			
			. 901	152			
			.901	275			
		17 0	.900	260 286			


The sample sizes in Output 46.2.1 range from 21 for the comparison of water versus electrolytes (assuming a correlation of 0.3 between body mass and lactic acid buildup) to 275 for the comparison of LZ1 versus LZ2 (assuming a correlation of 0.2). PROC GLMPOWER also includes the effect tests for Altitude and Fluid. Note that the required sample sizes for this study are lower than those for the study in Example 46.1.

Note that the error standard deviation has been reduced from 3.5 to 3.43 (when correlation is 0.2) or 3.34 (when correlation is 0.3) in the approximation of the effect of the body mass index covariate. The error degrees of freedom has also been automatically adjusted, lowered by 1 (the number of covariates).

Suppose you want to plot the required sample size for the range of power values from 0.5 to 0.95. First, define the analysis by specifying the same statements as before, but add the PLOTONLY option to the PROC GLMPOWER statement to disable the nongraphical results. Next, specify the PLOT statement with X=POWER to request a plot with power on the X axis. Sample size is automatically placed on the Y axis. Use the MIN= and MAX= options in the PLOT statement to specify the power range. The following statements produce the plot:

```
ods graphics on;
proc glmpower data=Fluids2 plotonly;
  class Altitude Fluid;
  model LacticAcid = Altitude Fluid;
  weight CellWqt;
  contrast "Water vs. others" Fluid -1 -1 -1 -1 4;
  contrast "EZD vs. LZ" Fluid 1 1 -1 -1 0;
  contrast "EZD1 vs. EZD2" Fluid 1 -1 0 0 0;
  contrast "LZ1 vs. LZ2" Fluid 0 0 1 -1 0;
  power
     nfractional
     stddev = 3.5
     ncovariates = 1
     corrxy = 0.2 0.3 0
               = 0.025
     alpha
     ntotal
               = .
     power
               = 0.9;
  plot x=power min=.5 max=.95;
run;
```

See Output 46.2.2 for the resulting plot.

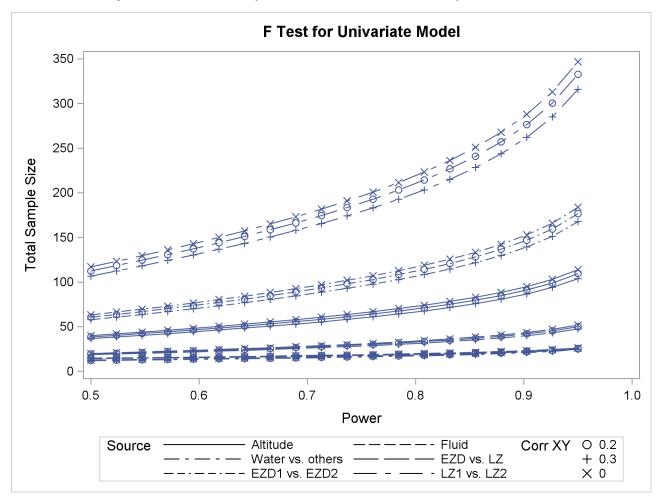

Output 46.2.2 Plot of Sample Size versus Power for Two-Way ANOVA Contrasts

In Output 46.1.2, the line style identifies the test, and the plotting symbol identifies the scenario for the correlation between covariate and response. The plotting symbol locations identify actual computed powers; the curves are linear interpolations of these points. As in Example 46.1, the required sample size is highest for the test of LZ1 versus LZ2.

Finally, suppose you want to plot the power for the range of sample sizes you will likely consider for the study (the range of 21 to 275 that achieves 0.9 power for different comparisons). In the POWER statement, identify power as the result (POWER=.), and specify NTOTAL=21. Specify the PLOT statement with X=N to request a plot with sample size on the X axis.

The following statements produce the plot:


```
proc glmpower data=Fluids2 plotonly;
   class Altitude Fluid;
   model LacticAcid = Altitude Fluid;
   weight CellWgt;
   contrast "Water vs. others" Fluid
                                             -1 -1 4;
   contrast "EZD vs. LZ"
                                           1 -1 -1 0;
                               Fluid
   contrast "EZD1 vs. EZD2"
                                                0 0;
                               Fluid
   contrast "LZ1 vs. LZ2"
                               Fluid
                                        0
                                          0
                                              1 -1 0;
```

ods graphics off;

The MAX=275 option in the PLOT statement sets the maximum sample size value. The MIN= option automatically defaults to the value of 21 from the NTOTAL= option in the POWER statement.

See Output 46.2.3 for the plot.

Output 46.2.3 Plot of Power versus Sample Size for Two-Way ANOVA Contrasts

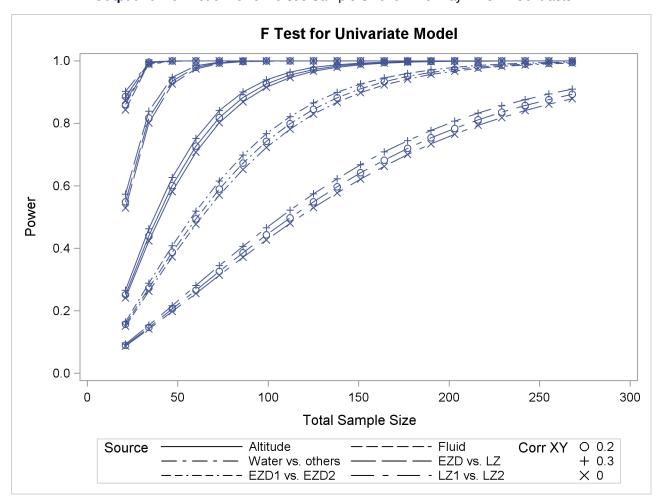

Although Output 46.2.2 and Output 46.2.3 surface essentially the same computations for practical power ranges, they each provide a different quick visual assessment. Output 46.2.2 reveals the range of required sample sizes for powers of interest, and Output 46.2.3 reveals the range of powers achieved for sample sizes of interest.

Example 46.3: Repeated Measures ANOVA

Logan, Baron, and Kohout (1995) and Guo et al. (2013) study the effect of a dental intervention on the memory of pain after root canal therapy. The intervention is a sensory focus strategy, in which patients are instructed to pay attention only to the physical sensations in their mouth during the root canal procedure.

Suppose you are interested in the long-term effects of this sensory focus intervention, because avoidance behavior has been shown to build along with memory of pain. You are planning a study to compare sensory focus to standard of care over a period of a year, asking patients to self-report their memory of pain immediately after the procedure and then again at 1 week, 6 months, and 12 months. You use a scale from 0 (no pain remembered) to 5 (maximum pain remembered).

The between-subject factor in your model is treatment, with two levels (sensory focus versus standard of care), and you allocate each treatment equally for a balanced design. The within-subject factor is time, with four levels (0, 1, 26, and 52 weeks).

You want to determine the number of patients who are needed in order to achieve a power of 0.9 at significance level $\alpha = 0.01$ for the test of the interaction between time and treatment, where the contrast over time contains all pairwise comparisons. You also want to generate a plot of power versus sample size that covers the power range of 0.05 to 0.99.

The default Hotelling-Lawley *F* test is appropriate for this study, especially because it is the same as the Wald test in PROC MIXED with the DDFM=KR Kenward-Roger degrees-of-freedom method and an unstructured covariance model.

You conjecture that the mean memory of pain for each treatment follows the information in Table 46.13.

	Time Sine	ce Root Ca	anal Therap	y
Treatment	Later on Same Day	1 Week	6 Months	12 Months
Sensory Focus	2.40	2.38	2.05	1.90
Standard of Care	2.40	2.39	2.36	2.30

 Table 46.13
 Mean Memory of Pain by Treatment

The following statements create a data set named Pain that is to contain these means over treatment and time:

```
data Pain;
  input Treatment $ PainMem0 PainMem1Wk PainMem6Mo PainMem12Mo;
  datalines;
    SensoryFocus    2.40    2.38    2.05    1.90
    StandardOfCare    2.40    2.39    2.36    2.30
;
```

The variable Treatment specifies the two treatments. The four variables PainMem0, PainMem1Wk, Pain-Mem6Mo, and PainMem12Mo specify the mean memory of pain scores in Table 46.13.

To characterize the variability, you must specify a set of parameters that defines the entire covariance matrix of the residuals. You conjecture that the error standard deviation is the same at all four time points, with a value somewhere between 0.92 and 1.04, and you account for your uncertainty by including both the lower and upper ends of this range in the sample size analysis. You believe that the correlation has a linear exponent autoregressive (LEAR) structure, with a correlation of about 0.6 between measurements one week apart and a

decay rate of about 0.8 over one-week intervals. The correlation matrix that contains these LEAR parameters, rounded to three decimal places, is shown in Table 46.14.

	0	1	26	52
0	1	0.6	0.491	0.399
1	0.6	1	0.495	0.402
26	0.491	0.495	1	0.491
52	0.399	0.402	0.491	1

Table 46.14 Conjectured Correlation Matrix

Use the DATA= option in the PROC GLMPOWER statement to specify Pain as the exemplary data set. Specify the between- and within-subject factors and the model by using the CLASS, MODEL, and REPEATED statements just as you would in PROC GLM for the repeated measures data analysis. Use the POWER statement to indicate sample size as the result parameter and specify the other analysis parameters, and use the PLOT statement to generate the power curves. The following statements perform the sample size analysis:

```
ods graphics on;
proc glmpower data=Pain;
   class Treatment;
   model PainMem0 PainMem1Wk PainMem6Mo PainMem12Mo = Treatment;
   repeated Time contrast;
   power
      mtest = hlt
      alpha = 0.01
      power = .9
      ntotal = .
      stddev = 0.92 1.04
      matrix ("PainCorr") = lear(0.6, 0.8, 4, 0 1 26 52)
      corrmat = "PainCorr";
   plot y=power min=0.05 max=0.99 yopts=(ref=0.9)
      vary (linestyle by stddev, symbol by dependent source);
run;
ods graphics off;
```


The STDDEV= option specifies the two scenarios for the common residual standard deviation, 0.92 and 1.04. The MATRIX= option defines the LEAR correlation structure, and the CORRMAT= option specifies it as the correlation matrix of the residuals. The Y=POWER option in the PLOT statement requests a plot that has power on the Y axis. (The result parameter—in this case, total sample size—is always plotted on the other axis.) The MIN= and MAX= options in the PLOT statement specify the power range. The YOPTS=(REF=) option adds a reference line at the target power value of 0.9. The VARY option specifies that the line style vary by the residual standard deviation and that the plotting symbol vary by the combination of within-subject and between-subject effects. The ODS GRAPHICS ON statement enables ODS Graphics.

Output 46.3.1 shows the output, and Output 46.3.2 shows the plot.

Output 46.3.1 Sample Size Analysis for Repeated Measures

	-	The GLMP					
	F.	Test for Mu	ıltıvar	late Model			
		Fixed Scen	nario E	lements			
	Wilks/HLT/PT Method			O'Brien-Shi	.eh		
	F Test		Hotelling-Lawley Trace				
	Alpha		0.01				
	Correlation Matrix		PainCorr				
	Nominal Power			C	0.9		
		Comput	ed N T	otal			
			Std		Num	Den	Actua
Index	Transformation	Source	Dev	Effect	DF	DF	Power
1	Time	Intercept	0.92	Time	3	176	0.900
2	Time	Intercept	1.04	Time	3	226	0.90
3	Time	Treatment	0.92	Time*Treatment	3		0.90
4	Time			Time*Treatment	3	442	0.90
5	Mean (Dep)	Intercept		_	1	4	
6	Mean (Dep)	Intercept		=	1	4	
7	Mean (Dep)	Treatment			1	950	
8	Mean (Dep)	Treatment	1.04	Treatment	1	1214	0.90
		Comput	ed N T	otal			
				N			
		Ind	dex To	tal			
			1	180			
			2	230			
			_	350			
			4	446			
			5	6			
			6	6			
			7	952			
			8 1	216			

Output 46.3.1 reveals that the required sample size to achieve a power of 0.9 for the test of the Time*Treatment interaction is 350 for the error standard deviation of 0.92 and 446 for the error standard deviation of 1.04.

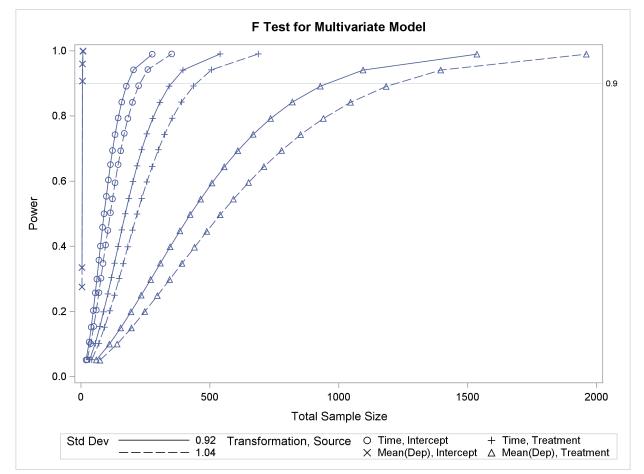

Output 46.3.2 Plot of Power versus Sample Size for Repeated Measures Analysis

References

- Castelloe, J. M. (2000), "Sample Size Computations and Power Analysis with the SAS System," in *Proceedings of the Twenty-Fifth Annual SAS Users Group International Conference*, Cary, NC: SAS Institute Inc.
- Castelloe, J. M. and O'Brien, R. G. (2001), "Power and Sample Size Determination for Linear Models," in *Proceedings of the Twenty-Sixth Annual SAS Users Group International Conference*, Cary, NC: SAS Institute Inc.
- Chi, Y.-Y., Gribbin, M. J., Lamers, Y., Gregory, J. F., III, and Muller, K. E. (2012), "Global Hypothesis Testing for High-Dimensional Repeated Measures Outcomes," *Statistics in Medicine*, 31, 724–742.
- Guo, Y., Logan, H. L., Glueck, D. H., and Muller, K. E. (2013), "Selecting a Sample Size for Studies with Repeated Measures," *BMC Medical Research Methodology*, 13.
- Hocking, R. R. (1985), The Analysis of Linear Models, Monterey, CA: Brooks/Cole.

- Huynh, H. and Feldt, L. S. (1976), "Estimation of the Box Correction for Degrees of Freedom from Sample Data in the Randomized Block and Split Plot Designs," *Journal of Educational Statistics*, 1, 69–82.
- Lecoutre, B. (1991), "A Correction for the Epsilon Approximate Test with Repeated Measures Design with Two or More Independent Groups," *Journal of Educational Statistics*, 16, 371–372.
- Lenth, R. V. (2001), "Some Practical Guidelines for Effective Sample Size Determination," *American Statistician*, 55, 187–193.
- Logan, H. L., Baron, R. S., and Kohout, F. (1995), "Sensory Focus as Therapeutic Treatments for Acute Pain," *Psychosomatic Medicine*, 57, 475–484.
- McKeon, J. J. (1974), "F Approximations to the Distribution of Hotelling's T_0^2 ," Biometrika, 61, 381–383.
- Muller, K. E. and Barton, C. N. (1989), "Approximate Power for Repeated-Measures ANOVA Lacking Sphericity," *Journal of the American Statistical Association*, 84, 549–555, also see "Correction to *Approximate Power for Repeated-Measures ANOVA Lacking Sphericity," Journal of the American Statistical Association* (1991), 86:255–256.
- Muller, K. E. and Benignus, V. A. (1992), "Increasing Scientific Power with Statistical Power," *Neurotoxicology and Teratology*, 14, 211–219.
- Muller, K. E., Edwards, L. J., Simpson, S. L., and Taylor, D. J. (2007), "Statistical Tests with Accurate Size and Power for Balanced Linear Mixed Models," *Statistics in Medicine*, 26, 3639–3660.
- Muller, K. E. and Peterson, B. L. (1984), "Practical Methods for Computing Power in Testing the Multivariate General Linear Hypothesis," *Computational Statistics and Data Analysis*, 2, 143–158.
- O'Brien, R. G. and Castelloe, J. M. (2007), "Sample-Size Analysis for Traditional Hypothesis Testing: Concepts and Issues," in A. Dmitrienko, C. Chuang-Stein, and R. D'Agostino, eds., *Pharmaceutical Statistics Using SAS: A Practical Guide*, 237–271, Cary, NC: SAS Institute Inc.
- O'Brien, R. G. and Muller, K. E. (1993), "Unified Power Analysis for *t*-Tests through Multivariate Hypotheses," in L. K. Edwards, ed., *Applied Analysis of Variance in Behavioral Science*, 297–344, New York: Marcel Dekker.
- O'Brien, R. G. and Shieh, G. (1992), "Pragmatic, Unifying Algorithm Gives Power Probabilities for Common *F* Tests of the Multivariate General Linear Hypothesis," Poster presented at the American Statistical Association Meetings, Boston, Statistical Computing Section. Also, paper in review, downloadable in PDF form from http://www.bio.ri.ccf.org/UnifyPow.
- Pillai, K. C. S. and Samson, P., Jr. (1959), "On Hotelling's Generalization of T^2 ," *Biometrika*, 46, 160–168.
- Simpson, S. L., Edwards, L. J., Muller, K. E., Sen, P. K., and Styner, M. A. (2010), "A Linear Exponent AR(1) Family of Correlation Structures," *Statistics in Medicine*, 29, 1825–1838.

Subject Index

actual power	correlation, 3665, 3666, 3671			
GLMPOWER procedure, 3674, 3676, 3690	covariance, 3665, 3666, 3671			
alpha level	covariates, class and continuous, 3659, 3666,			
GLMPOWER procedure, 3665	3669–3671, 3679, 3693			
analysis of covariance	displayed output, 3676			
power and sample size (GLMPOWER), 3693	effect, 3676			
analysis of variance	exemplary data set, 3646, 3648, 3655, 3659, 3673			
multivariate (GLMPOWER), 3657, 3671	3674, 3689			
power and sample size (GLMPOWER), 3647,	fractional sample size, 3676			
3688, 3693	graphics, 3687			
	introductory example, 3647			
between-subject factors	keyword-lists, 3673			
repeated measures, 3646, 3654, 3656, 3680	Kronecker product, 3667			
	linear exponent autoregressive (LEAR), 3667			
ceiling sample size	multivariate analysis of variance, 3657, 3671,			
GLMPOWER procedure, 3676	3700			
classification variables	name-lists, 3673			
GLMPOWER procedure, 3656, 3659	nominal power, 3674, 3676, 3690			
contrasts	number-lists, 3673			
power and sample size (GLMPOWER), 3651,	ODS graph names, 3687			
3656, 3678, 3680, 3688, 3693	ODS Graphics, 3687			
repeated measures (GLMPOWER), 3672	ODS table names, 3677			
correlation	plots, 3647, 3653, 3655, 3659			
GLMPOWER procedure, 3665, 3666, 3671	positional requirements for statements, 3653			
covariance	repeated measures, 3657, 3671, 3700			
GLMPOWER procedure, 3665, 3666, 3671	sample size adjustment, 3674			
covariates	standard deviation, 3666, 3670, 3671			
GLMPOWER procedure, 3659, 3666, 3669–3671,	statistical graphics, 3687			
3679, 3693	summary of statements, 3654			
	transformations for MANOVA, 3658			
effect	transformations for repeated measures, 3672			
GLMPOWER procedure, 3676	value lists, 3673			
exemplary data set	variance, 3666, 3670			
power and sample size (GLMPOWER), 3646,	GLMPOWER procedure			
3648, 3655, 3659, 3673, 3674, 3689	ordering of effects, 3655			
fractional comple size	graphics			
fractional sample size GLMPOWER procedure, 3676	GLMPOWER procedure, 3687			
OLIVIFOWER procedure, 5070	•			
GLMPOWER procedure	keyword-lists			
actual alpha, 3676	GLMPOWER procedure, 3673			
actual power, 3674, 3676, 3690	Kronecker product			
alpha level, 3665	GLMPOWER procedure, 3667			
analysis of variance, 3647, 3688, 3693				
ceiling sample size, 3676	LEAR, see linear exponent autoregressive			
compared to other procedures, 3647	linear exponent autoregressive (LEAR)			
computational methods, 3677	GLMPOWER procedure, 3667			
contrasts, 3651, 3656, 3672, 3678, 3680, 3688,	MANOVA III I I I I I I I I I I I I I I I I I			
3693	MANOVA, <i>see</i> multivariate analysis of variance multivariate analysis of variance			
	maniferine unaryon or variance			

```
GLMPOWER procedure, 3657, 3671
    power and sample size (GLMPOWER), 3700
name-lists
    GLMPOWER procedure, 3673
nominal power
    GLMPOWER procedure, 3674, 3676, 3690
number-lists
    GLMPOWER procedure, 3673
ODS graph names
    GLMPOWER procedure, 3687
ODS Graphics
    GLMPOWER procedure, 3687
orthogonalizing transformation matrix
    GLMPOWER procedure, 3659
plots
    power and sample size (GLMPOWER), 3647,
        3653, 3655, 3659
power
    See GLMPOWER procedure, 3645
POWER procedure
    compared to other procedures, 3647
prospective power, 3646
repeated measures
    contrasts (GLMPOWER), 3672
    GLMPOWER procedure, 3657, 3671
    power and sample size (GLMPOWER), 3700
retrospective power, 3646
sample size
    See GLMPOWER procedure, 3645
sample size adjustment
    GLMPOWER procedure, 3674
standard deviation
    GLMPOWER procedure, 3666, 3670, 3671
statistical graphics
    GLMPOWER procedure, 3687
transformation matrix
    orthogonalizing, 3659
transformations
    for multivariate ANOVA, 3658
transformations for repeated measures
    GLMPOWER procedure, 3672
value lists
    GLMPOWER procedure, 3673
variance
    GLMPOWER procedure, 3666, 3670
within-subject factors
    repeated measures, 3647, 3654, 3657, 3671, 3680
```

Syntax Index

ALPHA= option	MARKERS= option, 3661
POWER statement (GLMPOWER), 3665	MAX= option, 3662
	MIN= option, 3662
BY statement	NAME= option, 3663
GLMPOWER procedure, 3655	NPOINTS= option, 3662
	STEP= option, 3662
CLASS statement	VARY option, 3662
GLMPOWER procedure, 3656	X= option, 3662
CONTRAST option	XOPTS= option, 3663
REPEATED statement (GLMPOWER), 3672	Y= option, 3663
CONTRAST statement	YOPTS= option, 3663
GLMPOWER procedure, 3656	GLMPOWER procedure, POWER statement, 3664
CORRMAT option	ALPHA= option, 3665
POWER statement (GLMPOWER), 3665	CORRMAT option, 3665
CORRS option	CORRS option, 3665
POWER statement (GLMPOWER), 3665	CORRXY= option, 3666
CORRXY= option	COVMAT option, 3665
POWER statement (GLMPOWER), 3666	DEPENDENT option, 3666
COVMAT option	EFFECTS option, 3666
POWER statement (GLMPOWER), 3665	MATRIX option, 3666
DATE	METHOD= option, 3668
DATA= option	MTEST= option, 3668
PROC GLMPOWER statement, 3655	NCOVARIATES= option, 3669
DEPENDENT option	NFRACTIONAL option, 3669
POWER statement (GLMPOWER), 3666	NTOTAL= option, 3669
DESCRIPTION= option	OUTPUTORDER= option, 3669
PLOT statement (GLMPOWER), 3663	POWER= option, 3670
EFFECTS option	PROPVARREDUCTION= option, 3670
POWER statement (GLMPOWER), 3666	SQRTVAR option, 3670
TOWER statement (GEWITOWER), 5000	STDDEV= option, 3670
factor specification	UEPSDEF= option, 3671
REPEATED statement (GLMPOWER), 3672	GLMPOWER procedure, PROC GLMPOWER
	statement, 3654
GLMPOWER procedure	DATA= option, 3655
syntax, 3653	PLOTONLY= option, 3655
GLMPOWER procedure, BY statement, 3655	GLMPOWER procedure, REPEATED statement, 3671
GLMPOWER procedure, CLASS statement, 3656	CONTRAST option, 3672
GLMPOWER procedure, CONTRAST statement,	factor specification, 3672
3656	HELMERT option, 3673
SINGULAR= option, 3657	IDENTITY option, 3673
GLMPOWER procedure, MANOVA statement, 3657	MEAN option, 3673
M= option, 3658	POLYNOMIAL option, 3673
ORTH option, 3659	PROFILE option, 3673
GLMPOWER procedure, MODEL statement, 3659	GLMPOWER procedure, WEIGHT statement, 3673
GLMPOWER procedure, PLOT statement, 3659	GLMPOWER procedure, PROC GLMPOWER
DESCRIPTION= option, 3663	statement
INTERPOL= option, 3661	ORDER= option, 3655
KEY= option, 3661	•

REPEATED statement (GLMPOWER), 3673 **HELMERT** option REPEATED statement (GLMPOWER), 3673 **POWER** statement GLMPOWER procedure, 3664 **IDENTITY** option POWER= option REPEATED statement (GLMPOWER), 3673 POWER statement (GLMPOWER), 3670 INTERPOL= option PROC GLMPOWER statement, see GLMPOWER PLOT statement (GLMPOWER), 3661 procedure PROFILE option KEY= option REPEATED statement (GLMPOWER), 3673 PLOT statement (GLMPOWER), 3661 PROPVARREDUCTION= option POWER statement (GLMPOWER), 3670 M= option MANOVA statement (GLMPOWER), 3658 REPEATED statement MANOVA statement GLMPOWER procedure, 3671 GLMPOWER procedure, 3657 MARKERS= option SINGULAR= option PLOT statement (GLMPOWER), 3661 CONTRAST statement (GLMPOWER), 3657 MATRIX option SORTVAR option POWER statement (GLMPOWER), 3666 POWER statement (GLMPOWER), 3670 MAX= option STDDEV= option PLOT statement (GLMPOWER), 3662 POWER statement (GLMPOWER), 3670 MEAN option STEP= option REPEATED statement (GLMPOWER), 3673 PLOT statement (GLMPOWER), 3662 METHOD= option POWER statement (GLMPOWER), 3668 UEPSDEF= option POWER statement (GLMPOWER), 3671 MIN= option PLOT statement (GLMPOWER), 3662 VARY option MODEL statement PLOT statement (GLMPOWER), 3662 GLMPOWER procedure, 3659 MTEST= option WEIGHT statement POWER statement (GLMPOWER), 3668 GLMPOWER procedure, 3673 NAME= option X = optionPLOT statement (GLMPOWER), 3663 PLOT statement (GLMPOWER), 3662 NCOVARIATES= option XOPTS= option POWER statement (GLMPOWER), 3669 PLOT statement (GLMPOWER), 3663 NFRACTIONAL option POWER statement (GLMPOWER), 3669 Y = optionNPOINTS= option PLOT statement (GLMPOWER), 3663 PLOT statement (GLMPOWER), 3662 YOPTS= option NTOTAL= option PLOT statement (GLMPOWER), 3663 POWER statement (GLMPOWER), 3669 ORDER= option PROC GLMPOWER statement, 3655 **ORTH** option MANOVA statement (GLMPOWER), 3659 OUTPUTORDER= option POWER statement (GLMPOWER), 3669 PLOT statement

GLMPOWER procedure, 3659

PROC GLMPOWER statement, 3655

PLOTONLY= option

POLYNOMIAL option