



THE
POWER
TO KNOW.

SAS/ACCESS[®] 9.4 Interface to R/3

User's Guide

Second Edition

The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2014. *SAS/ACCESS® 9.4 Interface to R/3: User's Guide, Second Edition*. Cary, NC: SAS Institute Inc.

SAS/ACCESS® 9.4 Interface to R/3: User's Guide, Second Edition

Copyright © 2014, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.


SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513-2414.

February 2014

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit support.sas.com/bookstore or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

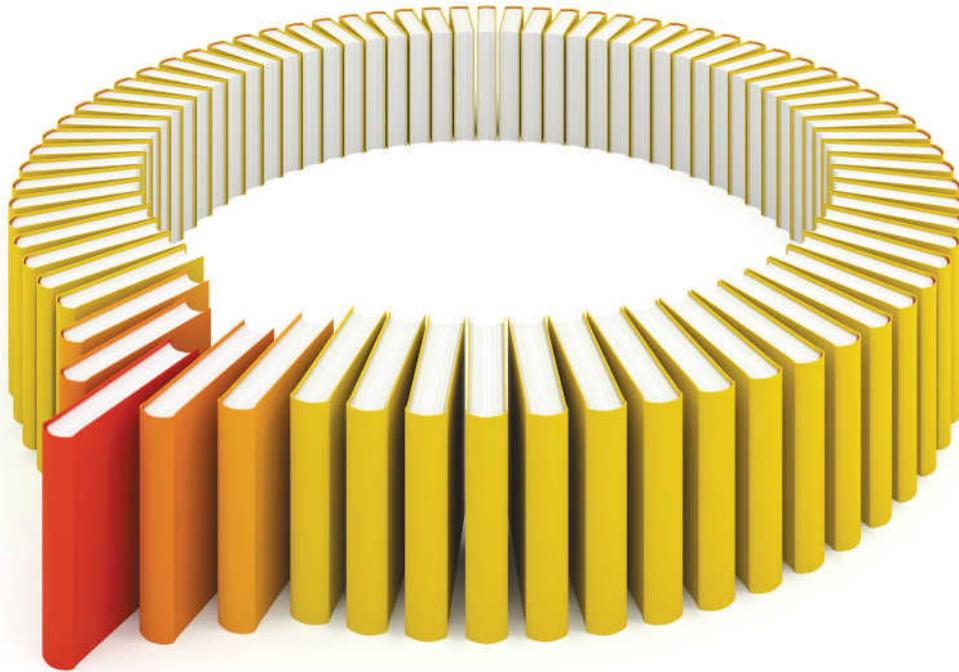

Gain Greater Insight into Your SAS[®] Software with SAS Books.

Discover all that you need on your journey to knowledge and empowerment.

 support.sas.com/bookstore
for additional books and resources.


THE POWER TO KNOW.

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration. Other brand and product names are trademarks of their respective companies. © 2013 SAS Institute Inc. All rights reserved. S107969US.0613

Contents

| | |
|---|------------|
| <i>What's New in SAS/ACCESS 9.4 Interface to R/3</i> | <i>vii</i> |
| <i>Accessibility Features of SAS/ACCESS Interface to R/3</i> | <i>ix</i> |
| <i>Recommended Reading</i> | <i>xi</i> |
| Chapter 1 • Getting Started with SAS/ACCESS Interface to R/3 | 1 |
| Getting Started with SAS/ACCESS Interface to R/3 | 1 |
| Searching R/3 Metadata | 3 |
| Exporting R/3 Metadata to SAS/Warehouse Administrator | 5 |
| Window and Field Help | 7 |
| Chapter 2 • Accessing and Using R/3 Data | 9 |
| Accessing Data Using Direct Access and ODBC | 9 |
| Accessing Data Using SAS/ACCESS Interface to R/3 | 9 |
| Accessing Data Using Secure Network Communications | 11 |
| Authorization Checks for BW and BI Objects | 12 |
| Chapter 3 • Using the SAS RFC Server | 15 |
| Overview of the SAS RFC Server | 15 |
| Using the SAS RFC Server on UNIX | 15 |
| Using the SAS RFC Server on Windows | 17 |
| Using the SAS RFC Server in Batch Mode | 19 |
| Chapter 4 • Using the RFC Macros and Macro Variables | 21 |
| Using the RFC Macros and Macro Variables | 21 |
| Using the R/3 BAPI Connector: Logon Window | 22 |
| Performing Batch Operations | 23 |
| Dictionary | 26 |
| Chapter 5 • Using the LIBNAME Statement for SAP | 39 |
| Overview of the LIBNAME Engine for SAP | 40 |
| LIBNAME Statement Syntax for SAP | 40 |
| SAP LIBNAME Engine Options | 41 |
| SAS LIBNAME Statement Options for the SAP Engine | 42 |
| SAS Data Set Options for the SAP Engine | 42 |
| Dictionary | 43 |
| Examples | 60 |
| Chapter 6 • The CALLRFC Procedure | 63 |
| Overview: CALLRFC Procedure | 63 |
| Syntax: The CALLRFC Procedure | 63 |
| Examples: The CALLRFC Procedure | 73 |
| Index | 75 |

What's New in SAS/ACCESS 9.4 Interface to R/3

Overview

SAS/ACCESS Interface to R/3 provides a read-only engine for using SAS to access data in your SAP R/3 or SAP BW system. SAS/ACCESS Interface to R/3 has these changes and enhancements.

- documentation enhancements

Documentation Enhancements

New in SAS 9.3 was the TRANSERRORCOMPATMODE= LIBNAME option.

Accessibility Features of SAS/ACCESS Interface to R/3

SAS/ACCESS Interface to R/3 includes accessibility and compatibility features that improve usability of the product for users with disabilities. These features are related to accessibility standards for electronic information technology adopted by the U.S. Government under Section 508 of the U.S. Rehabilitation Act of 1973, as amended.

x *Accessibility Features of SAS/ACCESS Interface to R/3*

Recommended Reading

Here is the recommended reading list for this title.

- online Help for *SAS/ACCESS Interface to R/3: Help*
- online Help for *SAS Data Surveyor for SAP: Help*
- *Base SAS Procedures Guide*
- SAS® Companion that is specific to your operating environment
- *SAS Data Integration Studio: User's Guide*
- *SAS Language Reference: Concepts*
- *SAS Data Set Options: Reference*
- *SAS Statements: Reference*
- *SAS/Warehouse Administrator Metadata API Reference*
- *Step-by-Step Programming with Base SAS Software*

For a complete list of SAS books, go to support.sas.com/bookstore. If you have questions about which titles you need, please contact a SAS Book Sales Representative:

SAS Books
SAS Campus Drive
Cary, NC 27513-2414
Phone: 1-800-727-3228
Fax: 1-919-677-8166
E-mail: sasbook@sas.com
Web address: support.sas.com/bookstore

Chapter 1

Getting Started with SAS/ACCESS Interface to R/3

| | |
|---|---|
| Getting Started with SAS/ACCESS Interface to R/3 | 1 |
| Searching R/3 Metadata | 3 |
| Exporting R/3 Metadata to SAS/Warehouse Administrator | 5 |
| Window and Field Help | 7 |


Getting Started with SAS/ACCESS Interface to R/3

This section provides a brief tutorial on how to use SAS/ACCESS Interface to R/3. For details, see the additional references in the “Recommended Reading” section at the front of this document or contact your on-site SAS support personnel.

Follow these steps to get started with SAS/ACCESS Interface to R/3.


1. Open a SAS session.
2. Enter `%r3access` in the command line to start SAS/ACCESS Interface to R/3:

Display 1.1 SAS Command Line

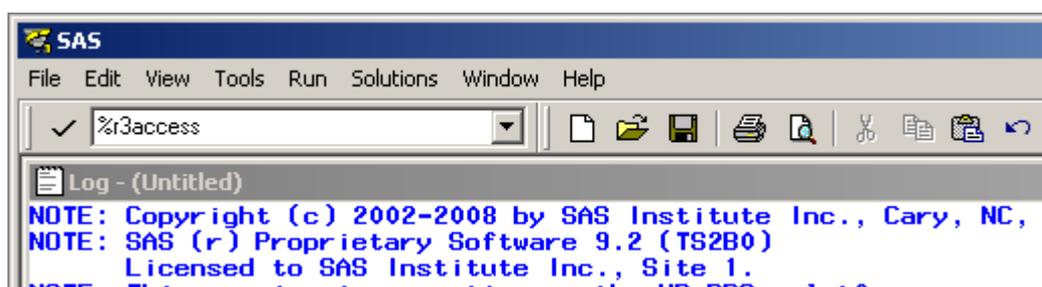


The SAS/ACCESS to R/3 desktop appears.

Display 1.2 SAS/ACCESS to R/3 Desktop

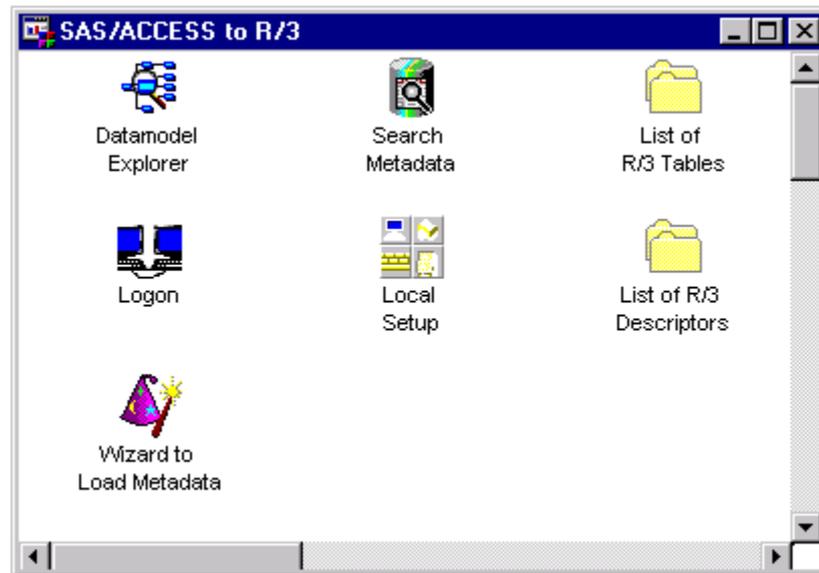

3. Double-click the Logon icon to open the Logon to R/3 window.

Display 1.3 Logon to R/3 Window

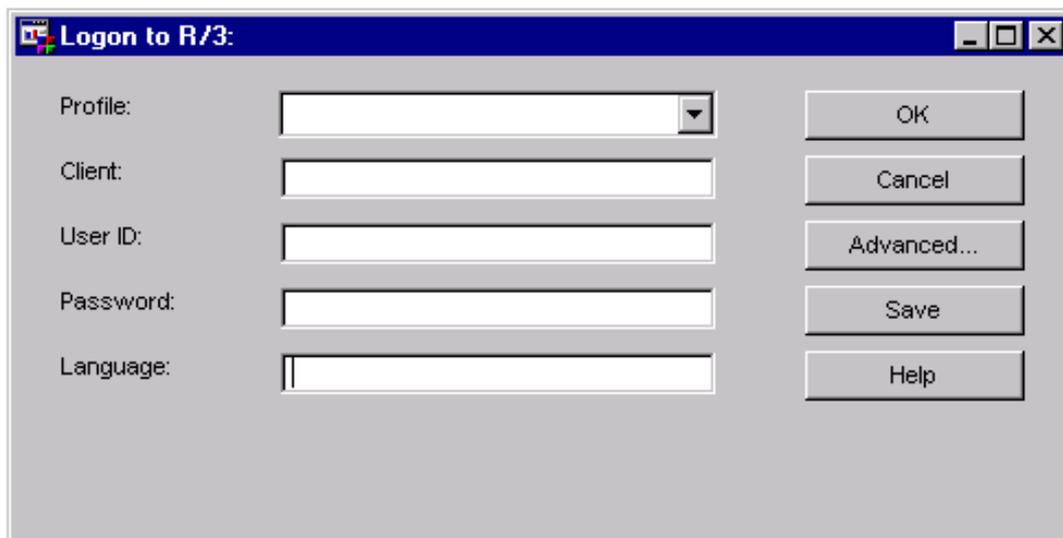

Existing predefined profiles are available from the **Profile** field drop-down list.

Follow these steps to use a predefined profile.


1. Select a profile from the **Profile** field drop-down list.
2. Click **OK** to connect to the SAP system.

If no predefined profiles exist, you must create one. Follow these steps.

1. Open the Logon to R/3 window as described earlier.
2. If you want to save the connection information to use later, enter a name for the **Profile**.
3. Enter a three-digit identification number for the **Client**.

4. Enter a valid **User ID**.
5. Enter the corresponding **Password** for the user ID.
6. Click **Advanced** in the Logon to R/3 window to display the Advanced Parameters window.

Display 1.4 Advanced Parameters Window

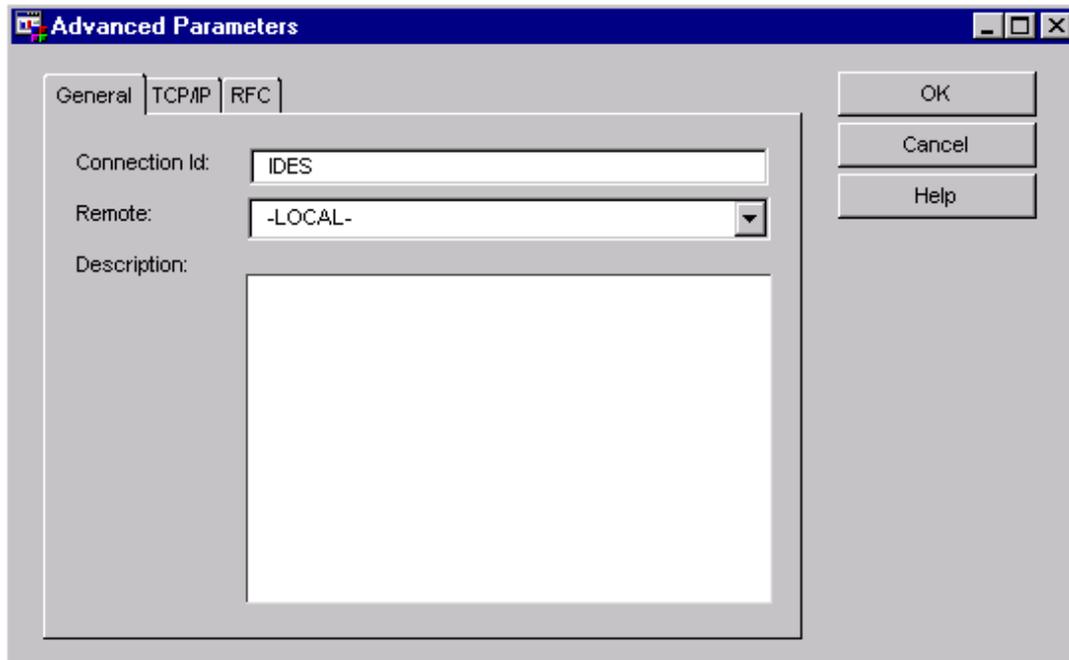

7. For z/OS operating environments, follow these steps.
 - a. Select the TCP/IP tab and enter the SAS RFC Server name in the **Host** field. The default is `localhost`. A fully qualified domain name might not be required, depending on the DNS configuration for the network.
 - b. Enter a valid port number in the **Port** field.
8. From the **RFC** tab, enter the SAP system host name in the **Host** field.
9. Click **OK** to close the Advanced Parameters window and return to the Logon to R/3 window.
10. If you want to use this logon information later, click **Save** to save the profile information.
11. Click **OK** to connect to the SAP system.


Searching R/3 Metadata

SAS/ACCESS Interface to R/3 provides a robust search capability that you can use to search your metadata for specific information. For example, to search for all tables that contain the word *scrap* in their metadata.

1. From SAS, start SAS/ACCESS Interface to R/3 to display the SAS/ACCESS to R/3 window.


2. Double-click the Search Metadata icon to display the Data Dictionary Search Facility window:

Display 1.5 Data Dictionary Search Facility Window

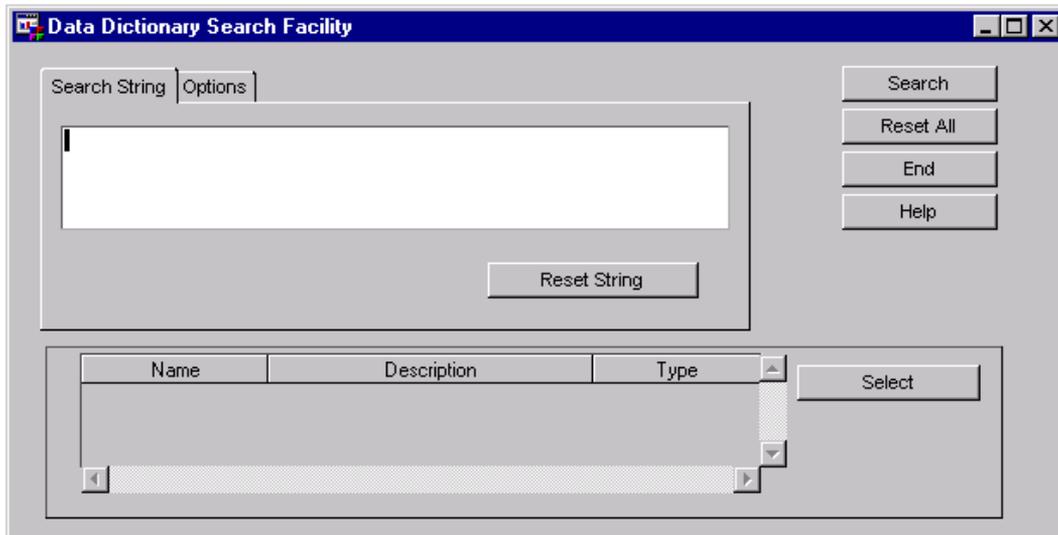


3. Click inside the text entry field on the **Search String** tab. Enter text to search for, such as the word "scrap." Click **Search**. A list of tables is displayed in the table in the bottom of the **Search String** tab, as shown below.

Display 1.6 Data Dictionary Search Facility Window (Searching for `scrap`)

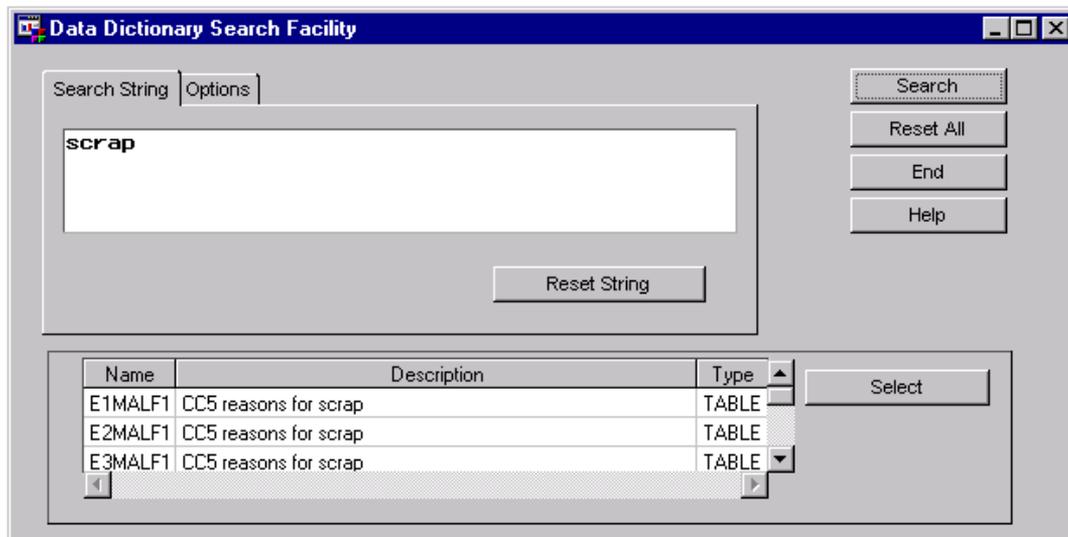

4. Double-click a table in the list. The General Attributes for a List of Tables window displays to provide more detailed information about the selected table.

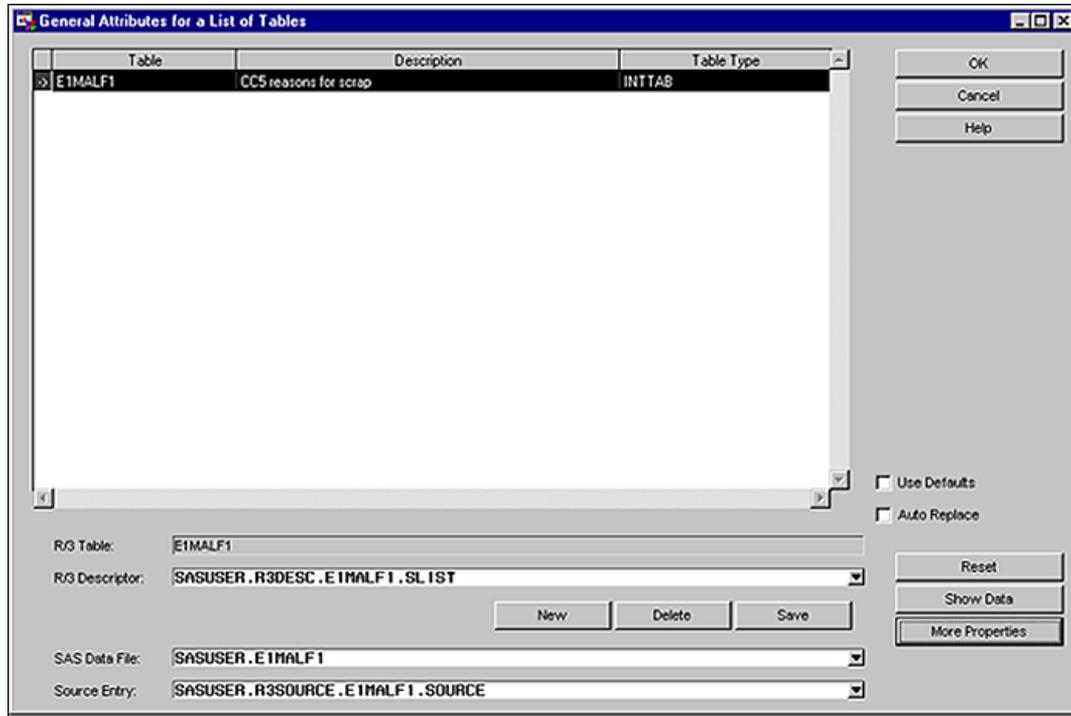Display 1.7 General Attributes for a List of Tables Window


5. Click **OK** to return to the Data Dictionary Search Facility window.

Exporting R/3 Metadata to SAS/Warehouse Administrator

With SAS/ACCESS Interface to R/3, you can export metadata from SAP tables to a warehouse environment in SAS/Warehouse Administrator. Follow these steps.


1. From SAS, open SAS/ACCESS Interface to R/3 to display the SAS/ACCESS to R/3 desktop.
2. Double-click the Datamodel Explorer icon to display the Datamodel Explorer window.

Display 1.8 Datamodel Explorer Window

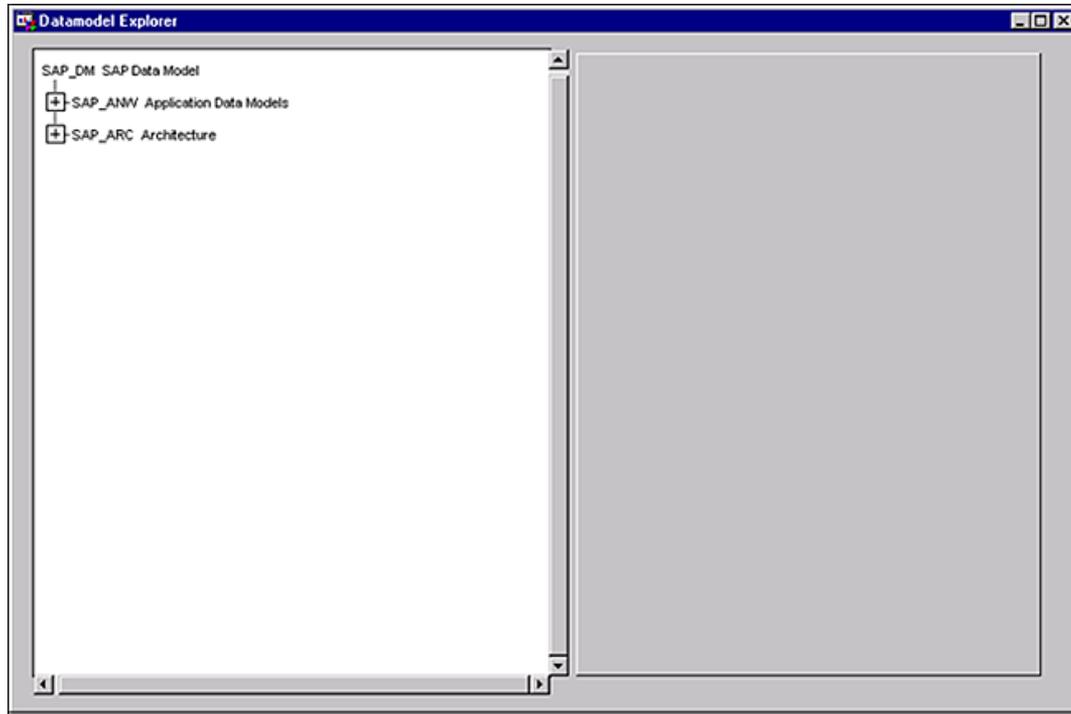

3. For this example, click the plus sign (+) for the application data models topic in the Datamodel Explorer. Then, click the plus sign (+) beside the Industry Solutions and Industry Solutions Public Sector subtopics. Click ISPS_HR IS-PS Human Resources to select this subtopic.
4. From the main menu of the Datamodel Explorer window, select **File** ⇒ **Export Metadata** ⇒ **SAS/Warehouse Administrator** to display the SAS/ACCESS to R/3: Export Metadata to SAS/Warehouse Administrator window.

Display 1.9 SAS/ACCESS to R/3: Export Metadata to SAS/Warehouse Administrator Window

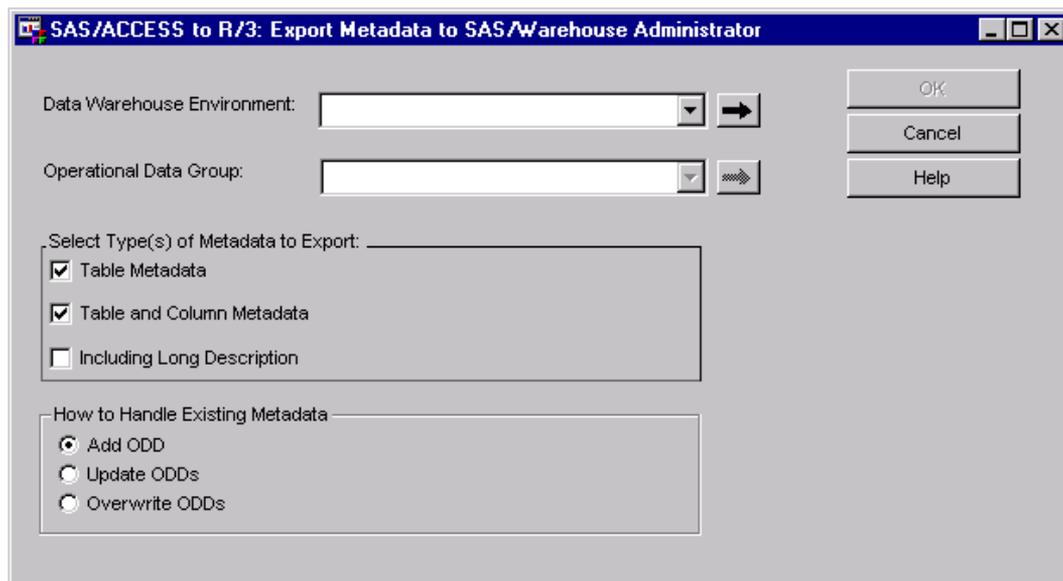

5. From the **Data Warehouse Environment** drop-down list, select a predefined environment from the SAS/ACCESS to R/3 folder.

6. From the **Operational Data Group** drop-down list, select an operational data group from the selected data warehouse environment. The **Operational Data Group** field is disabled until you select a data warehouse environment.
7. Click **OK** to export the metadata to the selected data warehouse environment in SAS/Warehouse Administrator.

Window and Field Help

For descriptions of windows and buttons in the SAS/ACCESS to R/3 desktop, click **Help** on any window to access *SAS/ACCESS Interface to R/3: Help*.

Chapter 2

Accessing and Using R/3 Data

| | |
|---|-----------|
| Accessing Data Using Direct Access and ODBC | 9 |
| Accessing Data Using SAS/ACCESS Interface to R/3 | 9 |
| Overview | 9 |
| Remote Function Call (RFC) Method | 10 |
| Extract Management Method | 11 |
| Accessing Data Using Secure Network Communications | 11 |
| Overview | 11 |
| Using the saprfc.ini File | 12 |
| Using the RFC_STRING Option | 12 |
| Authorization Checks for BW and BI Objects | 12 |

Accessing Data Using Direct Access and ODBC

Here are the methods that you can use to access data that does not require SAS/ACCESS Interface to R/3.

Direct Access

This is a method of transparent access that does not require additional programming or intermediate operations. The method is possible because the SAP system is an open systems-compliant application. Direct access uses an intermediate SAS/ACCESS product to the specific database.

ODBC (Open Database Connectivity)

This method uses SAS/ACCESS Interface to ODBC to allow direct data access in a PC environment.

Accessing Data Using SAS/ACCESS Interface to R/3

Overview

You can use SAS/ACCESS Interface to R/3 to access SAP data two different ways. Both methods generate a SAS DATA step.


- [Remote Function Call on page 10](#). This typical method offers online access to the SAP data.
- [Extract Management on page 11](#). Now largely superseded, this original method offers offline access to SAP data. Here is when you might find it most useful:
 - A poor or slow communication link exists between SAS and SAP.
 - A backup file is required.
 - A lot of data exists.

Remote Function Call (RFC) Method

Remote Function Call (RFC) is an SAP implementation of the Remote Procedure Call. RFC allows access to R/3 from external applications, such as SAS or other SAP systems.

The following figure provides an overview of the RFC method. The ABAP Function module and the ABAP Report module (provided with the interface), attach to the R/3 system. Communication between the ABAP Function module and the interface itself uses RFC over a TCP/IP connection. In addition to the components in the previous figure, in a z/OS environment a SAS RFC Server is deployed between the SAP system and the SAS Server to provide access to data in the SAP system.

Figure 2.1 Remote Function Call (RFC) Method of Accessing Data from the R/3 System

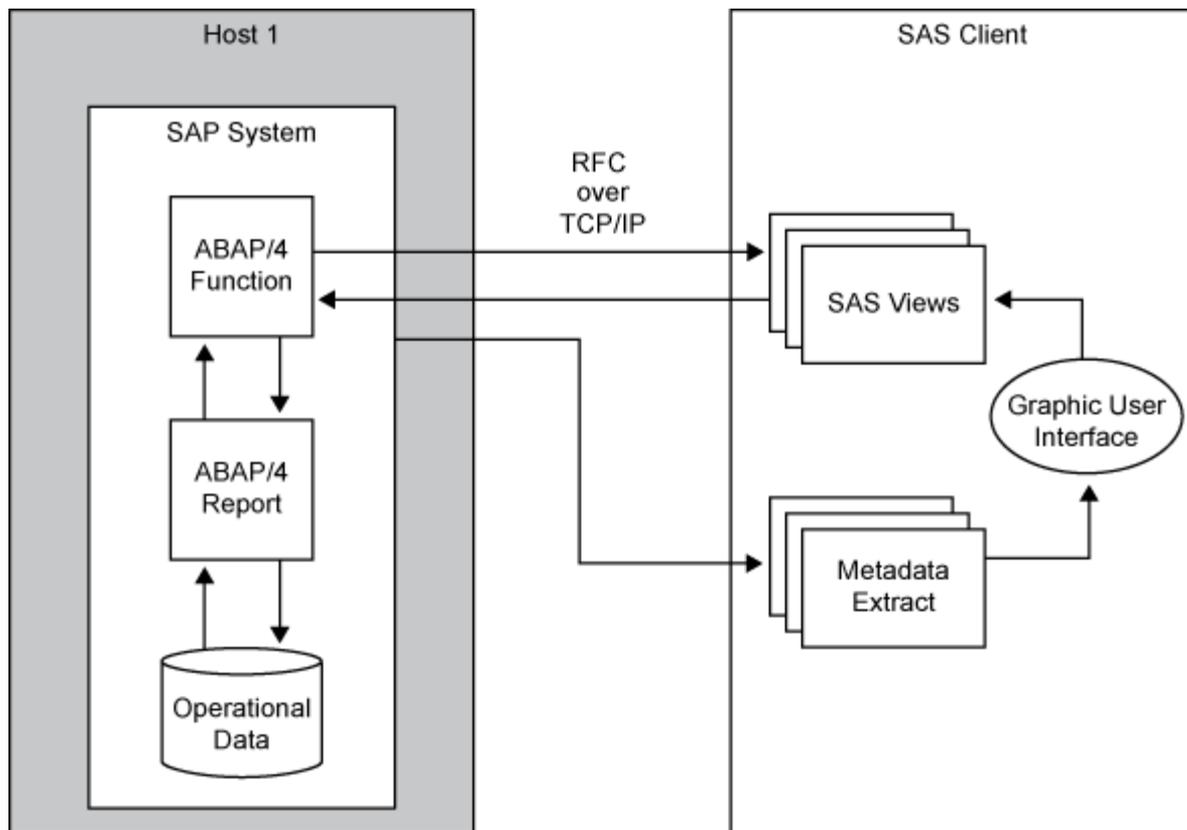

In general, the RFC method consists of generating a SAS DATA step to access the SAP data. It then uses the DATA step to create one of these items:

- a data set that is a SAS copy of the SAP data

- a view that reads the SAP data each time it is required

Extract Management Method

Overview

This method creates an ABAP query that copies the data from SAP to an external file. It also creates a SAS DATA step that then reads the external file into SAS. After the SAP data has been exported to SAS, the data can be held either temporarily for discrete analysis or permanently in a SAS data warehouse. The interface generates all of the necessary programs for both ABAP and SAS (based on the SAP data dictionary tables).

Installation and Setup

1. Generate an ABAP report: Use the descriptor file to create an ABAP report and write it to a text file. The ABAP report is used later to copy the SAP data to an external intermediate data file.
2. Generate a DATA step: Generate a SAS DATA step to read the intermediate data file.
3. Install the ABAP report in R/3: This step is independent of SAS/ACCESS Interface to R/3 and SAS and can be performed simultaneously with Step 2.
4. Install the ABAP text file from Step 1 into SAP.

Data Transfer and Use

After installation and setup, you can perform these steps as many times as required.

1. Run the ABAP report in R/3: Run the installed ABAP report on SAP. This creates the external intermediate data file.
2. Use the DATA step to read in or copy the external intermediate data file into SAS. However, depending on your situation, it might be possible to simplify or streamline the outlined process. For example, in UNIX a named pipe or other external file can allow ABAP to write data to the external intermediate data file so that SAS can read it simultaneously.

Accessing Data Using Secure Network Communications

Overview

The SAP system and the RFC protocol support secure network communications (SNC). You can configure SNC to allow single sign-on (SSO). Although you can also use SNC without single sign-on, you must still include user name and password credentials. This section shows two examples of how to specify the SNC logon information with the SAP LIBNAME engine. You must configure the SAP system and user accounts for SNC. For information about how to do this, see the SAP document, *Secure Network Communications User's Guide*.

Using the `saprfc.ini` File

This method requires that you create an entry in the `saprfc.ini` file. Here is an example:

```
DEST=SI9
TYPE=A
ASHOST=sapr3srv.sup.com
SYSNR=03
SNC_MODE=1
SNC_PARTNERNAME=p:SAPServiceSI9@sup.com
SNC_LIB=C:\Public\win32sso\gssntlm.dll
```

Then use the `LIBNAME` statement to use the connection:

```
libname a r3 dest=SI9;
```

Using the `RFC_STRING` Option

You can also use the `RFC_STRING` option to apply additional settings. The `SNC_LIB` string must not contain blanks.

```
libname a r3 ashost=sapr3srv.sup.com sysnr=03
rfc_string="SNC_MODE=1 SNC_PARTNERNAME=p:SAPServiceSI9
SNC_LIB=C:\Public\win32sso\gssntlm.dll";
```

This document shows two examples of how to use SNC for single sign-on in a `LIBNAME` statement. For more information about SNC and SNC configuration, see SAP documentation and other third-party documentation.

Authorization Checks for BW and BI Objects

The SAP system release level determines how authorization checks are performed for BW and BI objects. In releases before SAP BI 7.0, SAP uses the reporting authorization that uses the SAP standard authorization concept. For BI 7.0 and later, SAP uses an authorization concept for analysis authorization. SAS/ACCESS Interface to R/3 delivers one Business Add-In (BADI) that implements the reporting authorization and one BADI that implements analysis authorization.

During installation, SAS is configured to use one of three implementations for table access authorization checks. The default implementation when no BADI is activated uses the SAP authorization object `S_TABU_DIS`. If you want to use one of the two BADI implementations, you must activate it during installation. Here is a description of the implementations.

Table 2.1 Authorization Check Implementations

| Authorization Check Implementation | Description |
|------------------------------------|--|
| (Default, no BADI) | <code>S_TABU_DIS</code> authorization object |

| Authorization Check Implementation | Description |
|------------------------------------|--|
| Classic BADI /SAS/AUTHBW01 | Compatible with BW and BI systems. User authorization checks are performed at the InfoCube, InfoObject, and ODS levels using the reporting authorization (SAP standard authorization concept). |
| Enhanced BADI /SAS/IM_AUTHBI01 | Compatible with BI 7.0 and later systems. User authorization checks are performed using the analysis authorization. This not only provides an authorization check for the infoProvider (infoCube, infoObject, and DSO) but also column-level restrictions on master data attributes and key figures, and row-level restrictions on attributes. |

Chapter 3

Using the SAS RFC Server

| | |
|--|----|
| Overview of the SAS RFC Server | 15 |
| Using the SAS RFC Server on UNIX | 15 |
| Using the SAS RFC Server on Windows | 17 |
| Using the SAS RFC Server in Batch Mode | 19 |

Overview of the SAS RFC Server

The SAS RFC Server is part of SAS/ACCESS Interface to R/3 in a z/OS operating environment. It is a component of the SAP LIBNAME engine and provides access to the data in SAP systems. It supports calling ABAP RFC functions, and it uses the TCP/IP protocol for communication with the SAP LIBNAME engine. For more information about the SAP LIBNAME engine, see [“Overview of the LIBNAME Engine for SAP” on page 40](#).

Here is important information to keep in mind about the SAS RFC Server.

- It runs independently of SAS as a background process on the SAS host, the R/3 host, and another machine entirely.
- You can configure it to listen on any TCP/IP port (default 6999).
- You can have more than one concurrent instance of it on a given machine, but each instance must have a unique port number. Each instance can communicate with many SAP systems.
- It can process requests from multiple SAP application servers.
- It can support Unicode and non-Unicode SAP systems.

Using the SAS RFC Server on UNIX

In a UNIX environment, the SAS RFC Server for SAP is installed in the `!SASROOT/saspgm/dbi/bin` directory. You must add this directory to the `PATH` environment variable and add the location of the shared libraries to the appropriate environment variable. For details about how to set up environment variables, see *Post-Installation Instructions for SAS/ACCESS Interface to R/3*.

To start the SAS RFC Server in a UNIX environment, use this command:

```
sasrfc_server [-d 0|1|2|3|4|5|6] [-n name] [-p port] [-w workdir] [-N namespace]
              [-V variant] [-help] [-c dialog_compat_port]
              [-b "-p port-number -V variant_name -R report_name"]
              [-B number_of_bytes]
```

Optional parameters are enclosed in brackets [].

To stop the SAS RFC Server in a UNIX environment, use this command:

```
sasrfc_server [-k] [-p port]
```

Optional parameters are enclosed in brackets [].

Here are the options for the SAS RFC Server command for UNIX.

-d *n*

specifies whether to run the server as a daemon process or as an application and specifies the diagnostic level. The server is run as a daemon process when you specify **-dn** (where *n*=0) or when you do not specify the **-dn** option. After successful initialization, all messages are routed to **syslog**. When you specify the **-dn** option (where *n*= any number between 1 and 6), the program runs as an application and messages are routed to standard error. Higher diagnostic levels route more detailed messages to standard error.

-k

stops the service.

-n *name*

specifies the name of the service. This option distinguishes among multiple daemon processes. For example, a test service might be started as **-n test**.

-p *port*

identifies the port number on which the service listens. The default is **6999**.

-w *workdir*

specifies the working directory. For example, if your working directory is named **tmp**, use **-w /tmp** to specify this option.

-N *namespace*

specifies the namespace for ABAP functions and programs that SAS uses. The default is **/SAS/**. If the ABAP programs are installed in the customer namespace instead of in the **/SAS/** namespace, this parameter identifies where ABAP programs are installed.

-V *variant*

specifies the report variant that is assigned to this server. You must assign a report variant for each SAS RFC Server that accesses an SAP application server in batch mode. The variant parameter **G_DEST** specifies a unique destination to call back to the SAS RFC Server.

-help

specifies that you want to display command line Help.

-c *dialog_compat_port*

identifies the option that, when specified, runs the SAS RFC Server in SAS 8 compatibility mode on the port indicated by the **dialog_compat_port** parameter. The port number must be different from the one used for the SAS 9 requests. If you omit the **-c** option, no dialog compatibility is available.

-b“-p *port_number* [optional] -V *variant_name* [required] -R *report_name*” [optional] allows batch compatibility so that you can process SAS 8 ACCR3 requests while you are using a SAS 9 RFC Server. You must use double quotation marks in the

batch compatibility option to separate batch compatibility parameters from SAS 9 parameters that use the same syntax. If you omit the port parameter, the port number defaults to 6999. The report variant parameter must be a valid variant of the report. The values in *port_number*, *variant_name*, and *report_name* must be different from the values that SAS 9 and dialog compatibility uses.

-B *number_of_bytes*

sets the minimum buffer size for data transfers in batch and dialog modes. The *number_of_bytes* should be greater than 10,000 and no more than 8 digits, or it is ignored. If you omit the -B option, the default is 10,000 bytes. In batch mode, if you specify a value for the G_BUFMAX parameter that is less than the value of -B, the -B value is used.

For example, to start the SAS RFC Server as a daemon process with the name of **test** on port number **6991**, use this command:\

```
sasrfc_server -n test -p 6991
```

This sample command shows how to display command line Help:

```
sasrfc_server
```

To start the SAS RFC Server with debug level **4** on port number **6991**, use this command:

```
sasrfc_server -d 4 -p 6991
```

To stop a SAS RFC Server that is running on port number **6991**, use this command:

```
sasrfc_server -k -p 6991
```

Using the SAS RFC Server on Windows

In a Windows environment, the SAS RFC Server for SAP is installed in the **!SASROOT\access\sasexe** directory.

To start or stop the SAS RFC Server using a command line in the Windows operating environment, use this command:

```
sasrfc_server [-i n] [-r] [-s] [-k] [-t n] [-d n] [-n name[,desc]] [-p port]
              [-N namespace] [-V variant] [-help] [-c dialog_compat_port]
              [-b "-p port-number -V variant_name -R report_name"]
              [-B number_of_bytes]
```

Here are the options for the SAS RFC Server command for Windows.

-i *n*

installs the program as a Windows service and specifies the start-up option for a new service. Here are the start-up options.

***n*=2**

starts the service automatically

***n*=3**

starts the service on demand

***n*=4**

disables the service

-r

removes the program from the Service Manager.

- s
starts the service.
- k
stops the service
- t *n*
sets the start-up option for an existing service. Here are the start-up options.
 - n*=2
starts the service automatically
 - n*=3
starts the service on demand
 - n*=4
disables the service
- d *n*
specifies the diagnostic level. When you specify the -d *n* option where *n*= any number between 1 and 6, the program runs as an application and messages are routed to standard error. Higher diagnostic levels route more detailed messages to standard error.
- n *name,desc*
specifies the name and description of the service.
- p *port*
specifies the port number on which the server listens. The default is 6999.
- N *namespace*
specifies the namespace for ABAP functions and programs that SAS uses. The default is /SAS/. If the ABAP programs are installed in the customer namespace instead of in the /SAS/ namespace, this parameter identifies where the ABAP programs are installed.
- V *variant*
specifies the R/3 report variant that is assigned to this server. You must assign a report variant for each SAS RFC Server that accesses an R/3 application server in batch mode. The variant parameter G_DEST specifies a unique destination to call back to the SAS RFC Server.
- help
specifies that you want to display command line Help.
- c *dialog_compat_port*
identifies the option that, when specified, runs the SAS RFC Server in SAS 8 compatibility mode on the port indicated by the *dialog_compat_port* parameter. The port number for a SAS 9.1 request must be different from the one that was used for the SAS 9 requests. If you omit the -c option, no dialog compatibility is available.
- b“-p *port_number* [optional] -V *variant_name* [required] -R *report_name*” [optional]
allows batch compatibility so that you can process SAS 8 ACCR3 requests while you are using a SAS 9 RFC Server. You must use double quotation marks in the batch compatibility option to separate batch compatibility parameters from SAS 9 parameters that use the same syntax. If you omit the port parameter, the port number defaults to 6999. The report variant parameter must be a valid variant of the report. If you omit the report parameter, the report name defaults to /SAS/ZSASV8COMPAT.

-B *number_of_bytes*

sets the minimum buffer size for data transfers in batch and dialog modes. The *number_of_bytes* should be greater than 10,000 and no more than 8 digits, or it is ignored. If you omit the -B option, the default is 10,000 bytes. In batch mode, if you specify a value for the G_BUFMAX parameter that is less than the value of -B, the -B value is used.

For example, if you want to start the SAS RFC Server with a debug level of 1 on port number 6991, use this command:

```
sasrfc_server -d 1 -p 6991
```

To install the SAS RFC Server as a service with automatic start up on port 6991 and use the name **test** and a description of '**Test RFC Server**', use this command:

```
sasrfc_server -i 2 -n "test,Test RFC Server" -p 6991
```

To uninstall the server that was started in the previous example, use this command:

```
sasrfc_server -r -n "test"
```

Using the SAS RFC Server in Batch Mode

The SAS RFC Server can perform batch mode processing of RFC calls to the SAP system. Users who submit interactive RFC calls to the SAP system might encounter time-out limitations. This occurs when interactive SAP jobs exceed the default processing time-out limit of 10 minutes.

By allowing batch mode processing of RFC calls to the SAP system, time-out limitations for interactive SAP dialog processes are resolved. Batch mode processing is often used to reduce the use of dialog processes. It is also used to reduce the impact of extractions on the SAP system: It is a SAS program that reads SAP system tables and views by using the SAP LIBNAME engine. Batch processes usually run at a lower priority. Batch mode processes of RFC calls can also help control the number of simultaneous extractions.

The ABAP program that is normally generated (by another ABAP program) executes a requested read and join operation on one or more database tables. When operating in batch mode, the SAS RFC Server creates and releases an SAP job to execute this ABAP program. The SAS RFC Server then waits for the job that is running the ABAP program to start and to recall the SAS RFC Server. Finally, the resulting data stream (that the SAS RFC Server receives from the SAP system) is passed on to the SAP LIBNAME engine.

LIBNAME or data set option: BATCH | BATCH_MODE | BATCHMODE= 0|1|Y|N

Indicates whether the SAS RFC Server should use SAP batch jobs for the data extracts.

Y

RFC uses batch jobs to extract R/3 data

N

RFC uses dialog processes to extract R/3 data

The default value for this option is N.

To submit batch requests to the SAS RFC Server, you must set up an RFC destination and a variant for the /SAS/Z_SAS_READ ABAP program for each SAS RFC Server

instance. Before the SAS RFC Server can execute requests as a batch job, follow these steps.

1. Create a SAS RFC Server destination. For each SAS RFC Server that accesses an SAP system, a destination must be set up on that SAP system. The program ID and the gateway information defined in the destination are used to register the SAS RFC Server on an SAP gateway. If you use two SAS RFC Servers to read data from one SAP application server, you must set up two RFC destinations on that SAP application server. If you omit gateway information from the SM59 destination, the batch job can run only on the R/3 server that is defined in the SAS LIBNAME statement for the request. If you enter explicit gateway information in the SM59 destination information, the batch job runs on any eligible R/3 server as determined by the SAP site batch configuration. Omitting gateway information is typically used in small SAP configurations such as test, QA, and single-server systems. In production environments, it is preferable that jobs be run on a server that the SAP batch system allocates.
2. Create a variant of ABAP program /SAS/Z_SAS_READ. After defining the destination for the SAS RFC Server, you need to make the RFC destination known to the ABAP program by creating a variant for the ABAP program. The concept of variants provides a way of parameterizing ABAP programs. For each defined destination, you must create a variant that references the destination. Variants are client-dependent.
3. Start the SAS RFC Server with the variant. For more information about using the SAS RFC Server and particularly the `sasrfc_server` option, see [“Using the SAS RFC Server on UNIX” on page 15](#) and [“Using the SAS RFC Server on Windows” on page 17](#).

For details about setup of SAS RFC Server destinations and variants, see *Post-Installation Instructions for SAS/ACCESS Interface to R/3*.

Chapter 4

Using the RFC Macros and Macro Variables

| | |
|---|-----------|
| Using the RFC Macros and Macro Variables | 21 |
| Using the R/3 BAPI Connector: Logon Window | 22 |
| Performing Batch Operations | 23 |
| Overview | 23 |
| Source Parameter | 24 |
| Passwords | 24 |
| Dictionary | 26 |
| %CALLRFC Macro | 26 |
| %R3CONN B Macro | 30 |
| %R3CONN C | 31 |
| %R3CONN E Macro | 34 |
| RFC_LOGON_INFO Macro Variable | 34 |

Using the RFC Macros and Macro Variables

SAS/ACCESS Interface to R/3 includes several SAS macros and macro variables that let you communicate with the SAS RFC Server. Here are the available SAS macros and macro variables.

| Macro or Macro Variable | Purpose | Details |
|-------------------------|--|--|
| %CALLRFC | Calls a specified function. | “%CALLRFC Macro” on page 26 |
| %R3CONN B | Uses a profile to log on to the SAP system for batch processing. | “%R3CONN B Macro” on page 30 |
| %R3CONN C | Logs on to the SAP system when performing batch processing. | “%R3CONN C” on page 31 |
| %R3CONN E | Logs off from the SAP system when performing batch processing. | “%R3CONN E Macro” on page 34 |

| Macro or Macro Variable | Purpose | Details |
|-------------------------|---|--|
| RFC_LOGON_INFO | Specifies logon information and connection parameters to use in the %CALLRFC macro. | “RFC_LOGON_INFO Macro Variable” on page 34 |

Using the R/3 BAPI Connector: Logon Window

This window is displayed automatically if you do not use the RFC_LOGON_INFO macro string when you submit your %CALLRFC macro statement. Use it to define the R/3 BAPI connection parameters that are required to access the SAP system.

Display 4.1 R/3 BAPI Connector: Logon Window

The screenshot shows a dialog box titled "R/3 BAPI Connector: Logon". It features a list of labels on the left, each followed by a text input field: Client, User, Password, Language, Destination, Host, System number, Gateway host, and Gateway service. To the right of these fields are three buttons: "OK", "Cancel", and "Help". The window has a standard Windows-style title bar with minimize, maximize, and close buttons.

For more information about the %CALLRFC macro, see [“%CALLRFC Macro” on page 26](#). For more information about using the RFC_LOGON_INFO macro string, see [“RFC_LOGON_INFO Macro Variable” on page 34](#).

This window contains these fields.

- Client** [required]
lets you identify the SAP logon client.
- User** [required]
lets you identify the SAP user logon ID.
- Password** [required]
lets you enter the SAP user password.

Language [required]

lets you specify the SAP logon language. Specify the 1-byte SAP language (E for English, D for German, and so on) or the 2-byte ISO language (EN for English, DE for German, and so on).

Destination

lets you identify the logical destination of the `saprfc.ini` file, if applicable. This field is required if you use the `saprfc.ini` file.

Host

lets you identify the application server host. This field is required if you use a specific application server.

System number

lets you identify the SAP system number if you use a specific application server and are not using Load Balancing. This field is required if you use a specific application server.

Gateway host

lets you identify the host name of the SAP gateway.

Gateway service

lets you identify the service of the SAP gateway.

The R/3 BAPI Connector Logon window contains these buttons.

OK

submits the R/3 BAPI connection parameters that you entered and tries to log on to the SAP system.

Cancel

closes the R/3 BAPI Connector: Logon window without submitting the connection parameters and trying to log on to the SAP system.

Help

displays the SAS Help for the window.

Performing Batch Operations

Overview

You can use batch operations to automate processes. For example, you can use them for overnight operations or to simplify connections for end users.

Use this command open the connection for a batch operation:

```
%r3connb(profile=profile-name,
libref=SAS-libref, function=OPEN);
```

profile-name

specifies the name of the profile to use to save the information in the Logon to R/3 window.

SAS-libref

specifies the SAS library where the profile was saved. If you do not specify this parameter, the profile is sought in the WORK, SASUSER, and R3LIB SAS libraries, in that order.

function=OPEN
opens the connection.

Use one of these commands to close the connection:

```
%r3connb(profile=profile-name,
libref=SAS-libref,
function=CLOSE);
```

```
%r3connb(id=connection-id,
function=CLOSE);
```

profile-name
specifies the name of the profile to use to save the information in the Logon to R/3 window.

SAS-libref
specifies the SAS library where the profile was saved. If you do not specify this parameter is not specified, the profile is sought in the WORK, SASUSER, and R3LIB SAS libraries, in that order.

function=CLOSE
disconnects from the SAP system.

connection_id
specifies the connection ID.

Source Parameter

Previous versions of SAS/ACCESS Interface to R/3 included a source parameter in the batch connection. For backward compatibility, the source parameter that is described below is still supported, although its use is not recommended.

Submit this command in SAS to set up the connection for batch:

```
%r3connb (source = libref.catalog.entry.SOURCE );
```

If you are using batch mode, submit this command in SAS to disconnect before exiting:

```
%r3connb (source = libref.catalog.entry.SOURCE, function = close);
```

Passwords

In batch processing, all parameters to log on to an SAP system are generally stored in permanent SAS catalog entries. If you do not want to store all parameters—particularly, user ID, password, and client—use the following SAS code to prompt the user for this information. In this scenario, you must enter all other connection information—function module name, gateway host, or gateway service—in the Application Setup window when you create the SAS DATA step view.

```
/*-----*/
/* This SAS program demonstrates how to prompt a user */
/* for the SAP user ID, password, client, and          */
/* language information.                               */
/* The remote processing is enclosed in comments.    */
/*-----*/

*--- reset password ---*;
%let pwd=;
```

```

*--- set the message text ---*;
  %let message=Please enter the SAP logon parameter;

*--- prompt the user for the parameters ---*;
  %macro secure;
  %global usr pwd cli lng;
  %window R3 columns=80 rows=15
    #2 @5 message 50 protect=yes
    #4 @5 "User      : " usr 10 required=yes
    #6 @5 "Password: " pwd 10 display=no required=yes
    #8 @5 "Client    : " cli 3  required=yes
    #10 @5 "Language : " lng 1  required=yes;
  %display R3;
  %mend secure;

  %secure;

/* === for remote processing ===== */

*--- macro to pass macro variables to ---*;
*--- a remote SAS session ---*;
  %macro syslput(macvar,macval,remote=);
  %let str=%str(rsubmit &remote );
  %nrstr(%let) %str(&macvar = &macval ; endrsubmit;);
  &str ;
  %mend syslput;

*--- pass macro variables to the remote SAS session ---*;
  %syslput(usr,&usr);
  %syslput(pwd,&pwd);
  %syslput(cli,&cli);
  %syslput(lng,&lng);

*--- submit the code to the remote SAS session ---*;
  rsubmit;

=== end of remote processing ===== */

*--- a temporary catalog entry for the connection ---*;
*--- parameters ---*;
  %let source=work.r3conn.conn1.source;

*--- the connection id ---*;
*--- ATTENTION: This has to be the same connection ID ---*;
*--- as the one that was used to create the views. ---*;
  %let cconn=conn1;

*--- the host/port where the SAS RFC Server program ---*;
*--- is running, used only in z/OS operating environment ---*;
  %let tcphost=cafe7.eur.sas.com;
  %let port=6999;

*--- set the host parameter ---*;
  %let hst=hostname;

```

```

*--- save the parameters to the temporary catalog ---*;
*--- entry ---*;
  proc display c=sapr3.sr3dbi.savconnb.scl;
  run;

*--- connect to the SAP system ---*;
  %r3connb(source=&source);

*--- use the Data Step view you have created with the ---*;
*--- SAS/ACCESS Interface to R/3 ---*;

*--- close the connection to the SAP system ---*;
  %r3connb(source=&source, function=close);

/* === for remote processing
=====
  endrsubmit;

=== end of remote processing

===== */
*--- end of sample program ---*;

```

Dictionary

%CALLRFC Macro

Calls a specified RFC-enabled function module.

- Type:** autocall macro
- Requirement:** Function modules that are called using this macro must be RFC-enabled, synchronous, and have no user interaction.
- Data source:** R/3
- See:** [RFC_LOGON_INFO macro variable](#), “Using the R/3 BAPI Connector: Logon Window”
-

Syntax

%CALLRFC

```

(<RFC-enabled function module name>
 EXPORTING <parameter string> IMPORTING <parameter string>
 INTABLES <parameter string> OUTTABLES <parameter string>
 USING <parameter string>)

```

Optional Arguments

EXPORTING

passes field values or structures to the specified function module. The EXPORTING parameters are declared as import parameters in the function interface. Here is how they are defined.

- *p1=value1 ... pn=valuen*

These parameters are passed as field values to the specified function module.

- *p1.n1=value p1.n2=value2 ... pn.vn=valuen*

These parameters are passed as elements of a structured parameter. The parameter is a complex parameter that contains fields.

IMPORTING

passes field values or structures from the specified function module back to SAS. Here is how they are defined.

- *p1=var1 ... pn=varn*

The *p1 ... pn* parameters are export parameters that are declared in the function interface.

The *var1 ... varn* parameters are SAS macro variables that are used to pass the values from the SAP system back to SAS. The macro variables must be defined before the function call is submitted.

- *p1=dataset1 pn=datasetn*

Parameters that are written into a data set require a two-level data set name. Writing parameters into data sets can be useful for structured parameters.

INTABLES

passes references to input SAS data sets. Here is how they are defined.

- *p1=dataset1 ... pn=datasetn*

The SAS data sets are converted into internal tables and are passed to the specified function module. The variable names in the SAS data set must match the field names of the internal table as they are defined in the function interface.

OUTTABLES

specifies references to output SAS data sets. Here is how they are defined.

- *p1=dataset1 ... pn=datasetn*

Internal tables that are passed back to SAS from the specified function module are converted into SAS data sets.

USING

specifies alternate connection parameters when you log on to the SAP system. By default, the %CALLRFC macro uses the connection parameters that are defined in the RFC_LOGON_INFO variable. However, if you want to use an alternate set of connection parameters, create a variable that contains those parameters and reference that variable in the USING parameter. The alternate logon variable must be defined before the function call is submitted.

Details

If an error occurs while the %CALLRFC macro is executing, the macro variables &SYSRC, &SYSERR, or both contain a nonzero value. (See [“Example 4: Check for Errors Using Macro Variables”](#) on page 29.) The ABAP function module might also contain parameters to return error conditions to the calling program. These return codes can be written into a SAS macro variable and checked in the SAS program. (See [“Example 5: Check for Errors Using Function Module Parameters”](#) on page 29.)

Use the RFC_LOGON_INFO macro variable with the %CALLRFC macro. It defines the R/3 BAPI connection parameters that are required to access the SAP system. You can specify these connection parameters by using the RFC_LOGON_INFO macro string, or you can use the R/3 BAPI Connector window. This window is displayed

automatically if you do not use the RFC_LOGON_INFO macro string when you submit your %CALLRFC macro statement. Below are the required connection parameters. If any required values are missing, you are prompted to provide the missing information.

- CLIENT
- USER
- PASSWD (or PASSWDX)
- LANG

The RFC_LOGON_INFO macro variable also requires some connection information. Here is how to define the connection parameters:

| If you use... | Specify... |
|-------------------------------|----------------------------------|
| the saprfc.ini file | DEST value |
| a specific application server | ASHOST and SYSNR values |
| load-balancing | MSSHOT, R3NAME, and GROUP values |

Load-balancing is available only if the CALLRFC executable has been linked using Release 4.0 or higher of the RFCSDK.

For more information about defining the RFC_LOGON_INFO variable, see “RFC_LOGON_INFO Macro Variable” on page 34. For more information about using the R/3 BAPI Connector window, see “Using the R/3 BAPI Connector: Logon Window” on page 22.

Examples

Example 1: Read Data into a SAS Data Set

This example shows how to use the %CALLRFC macro to read data from an SAP R/3 system into a SAS data set. The %CALLRFC macro calls the RFC-enabled function module named RFC_SYSTEM_INFO and writes system information output to the WORK.RFCSI_EXPORT SAS data set.

```
%callrfc(RFC_SYSTEM_INFO
         IMPORTING RFCSI_EXPORT=WORK.RFCSI_EXPORT);
```

Example 2: Specify Logon Parameters

This example shows how to use RFC_LOGON_INFO to specify logon parameters for the %CALLRFC macro. TestUser connects to a specific application server to read data from the R/3 system into a temporary SAS data set named WORK.RFCSI_EXPORT.

```
%let RFC_LOGON_INFO CLIENT=010 USER=TestUser
         PASSWD=TestPwd LANG=E
         ASHOST=HostName SYSNR=02;
%callrfc(RFC_SYSTEM_INFO
         IMPORTING RFCSI_EXPORT=WORK.RFCSI_EXPORT);
```

Example 3: Use SAS Dates

This example shows how to use SAS dates in the function call. The %CALLRFC macro is used to call the function module named BAPI_COSTCENTER_GETLIST. The

function call reads the list of cost centers for controlling area 1000 for the current date and writes the output list into a temporary SAS data set named WORK.COSTCENTER_LIST. The return code of the function call is written to the SAS macro variable MRETURN. The macro variable is defined before the %CALLRFC macro is used.

```
%let MRETURN=;
%callrfc(BAPI_COSTCENTER_GETLIST
         EXPORTING CONTROLLINGAREA=1000
             DATE=%sysfunc(date (), yymmddn8.)
         IMPORTING RETURN=MRETURN
         OUTTABLES COSTCENTER_LIST=WORK.COSTCENTER_LIST);
```

Example 4: Check for Errors Using Macro Variables

This example shows how to use the &SYSRC and &SYSERR macro variables to check for errors that occur while the %CALLRFC macro executes. A new macro named %EXAMPLE4 is created. It uses the SAS macro variables &SYSRC and &SYSERR to check return codes from the %CALLRFC macro. It also generates an error message if errors occurred.

```
%macro example4;
%callrfc(INVALID_FUNCTION_CALL);
  %if %eval(&sysrc) ne 0 or %eval(&syserr) ne 0 %then %do;
    %put An error occurred while calling the function.
    %put sysrc=&sysrc syserr=&syserr;
  %end;
%mend;
%example4;
```

Example 5: Check for Errors Using Function Module Parameters

This example shows how to use the parameters in the function module to check for errors that occurred while the %CALLRFC macro executes. A new macro named %EXAMPLE5 is created to retrieve a list of customers from the R/3 system. The range of customer numbers to retrieve is specified in the SAS data set WORK.IDRANGE. This data set is then used as the input table in the function call. Information for customers between customer number 000000000 and 999999999 is read into the SAS data set WORK.ADDRESSES. The function parameters contain return codes and messages from the BAPI_CUSTOMER_GETLIST function. The structure of the return parameter is defined in the function interface. In this example, the first character in the return string contains the message type. E indicates an error message and W indicates a warning message.

```
%macro example5;
%global bapi_return;
  /* create the input data set */
data WORK.IDRANGE;
  sign='I';
  option='BT';
  low='000000000';
  high='999999999';
output;
run;
%callrfc(BAPI_CUSTOMER_GETLIST
         IMPORTING RETURN=BAPI_RETURN
         INTABLES IDRANGE=WORK.IDRANGE
         OUTTABLES ADDRESSDATA=WORK.ADDRESSES);
```

```

%if %substr(&bapi_return,1,1)=E or
    %substr(&bapi_return,1,1)=W %then %do;
    %put An error occurred while calling the BAPI_CUSTOMER_GETLIST function.;
    %put bapi_return=&bapi_return;
%end;
%else %do;
    proc print data=WORK.ADDRESSES;
        run;
%end;
%mend;
%example5;

```

%R3CONN Macro

Connects to or disconnects from an SAP system using a profile.

Type: batch macro

Data source: R/3

See: [%R3CONN macro](#), [%R3CONN macro](#)

Syntax

%R3CONN

(PROFILE=*value*, LIBREF=*value*, FUNCTION=open | close, ID=*value*, SOURCE=*value*)

Optional Arguments

PROFILE

identifies the name of the profile that contains the information used in the Logon to R/3 window.

LIBREF

identifies the SAS library containing the LIBREF.R3CONN data set. This data set contains the logon parameters defined for the profile.

FUNCTION

specifies whether you want to open or close the connection to the R/3 system. Valid values are

- OPEN
- CLOSE

ID

specifies the connection ID that is associated with the profile.

Note: This parameter was defined for previous versions of this macro and is supported in this release for backward compatibility. However, it is recommended that this parameter not be used.

SOURCE

specifies the logon parameters that are defined in SOURCE type catalog entries. Although the SOURCE parameter is supported in this version, logon parameters should now be defined in profiles that are stored in a SAS data set.

Note: This parameter was defined for previous versions of this macro and is supported in this release for backward compatibility. However, it is recommended that this parameter not be used.

Details

The %R3CONNB macro lets you log on and off the SAP system using parameters stored in the data set *libref.R3CONN* under the profile name. Profiles that connect to and disconnect from the SAP system can be used for batch operation, such as overnight processing, and to simplify the logon process for end users.

Examples

Example 1: Connect to an R/3 System By Using a Profile

The following example shows how to use the %R3CONNB macro to connect to the R/3 system using a profile:

```
%r3connb(PROFILE=BatchUser, LIBREF=batch, FUNCTION=open);
```

In this example, the profile BatchUser is used to connect to the R/3 system. The BatchUser profile uses the connection parameters stored in the BATCH.R3CONN data set.

Example 2: Disconnect from an R/3 System By Using a Profile

The following example shows how to use the %R3CONNB macro to disconnect from the R/3 system by using a profile:

```
%r3connb(PROFILE=BatchUser, LIBREF=batch, FUNCTION=close);
```

The BatchUser profile was used to connect to the R/3 system. This example demonstrates how to use the %R3CONNB macro to close the BatchUser profile's connection to the R/3 system.

%R3CONNC

Connects to an SAP system.

Type: batch macro
Data source: R/3
See: [%R3CONNB macro](#), [%R3CONNE macro on page 34](#)

Syntax

%R3CONNC

```
(<CCONN=value,> <HOST=value,> <PORT=value,> <USR=value,>  

  <PWD=value,> <CLI=value,> <LNG=value,> <HST=value,>  

  <DST=value,> <SNA=value,> <R3=value,> <SYS=value,>  

  <GWS=value,> <GWH=value,> <FUNC=value,> <CPICUSR=value,>  

  <CPICPWD=value,> <CPICCLI=value,> <CPICLNG=value,> <CPICDST=value,>  

  <CPICFRM=value,> <DEBUG=value,> <REMSSESS=value>)
```

Optional Arguments

CCONN

specifies the connection identifier to be used when connecting to the SAP system.

HOST

specifies the name of the TCP/IP host to be used when connecting to the SAS RFC Server. This parameter is used in z/OS operating environments only.

PORT

specifies the TCP/IP port to be used when connecting to the SAS RFC Server. This parameter is used in z/OS operating environments only.

USR

specifies the user ID to be used when connecting to the SAP system.

PWD

specifies the encoded password to be used when connecting to the SAP system.

CLI

specifies the three-digit client ID to be used with the SAP system.

LNG

specifies the logon language to be used with the SAP system.

HST

specifies the SAP server host name to be used when connecting to the SAP system.

DST

specifies the destination name to be used when using the SIDEINFO file to specify connection parameters.

SNA

specifies whether SAS connects to an R/2 system. Valid values are

- Y—SAS connects to an R/2 system.
- blank—SAS is *not* connecting to an R/2 system.

R3

specifies whether SAS is connecting to an R/3 system. Valid values are

- Y—SAS is connecting to an R/3 system.
- blank—SAS is *not* connecting to an R/3 system.

SYS

specifies the SA P System number. This parameter can be specified here or in the SIDEINFO file.

GWS

specifies the TCP service of the SAP gateway. This parameter can be specified here or in the SIDEINFO file.

GWH

specifies the name of the host on which the SAP gateway is running. This parameter can be specified here or in the SIDEINFO file.

FUNC

specifies the function module to be used.

CPICUSR

specifies the user identifier for CPIC.

CPICPWD

specifies the encoded password for CPIC.

CPICCLI

specifies the client for CPIC.

CPICLNG

specifies the logon language for CPIC.

CPICDST

specifies the destination for CPIC communication (as defined in the TXCOM table in the SAP system).

CPICFRM

specifies the form for CPIC.

DEBUG

specifies whether you want to use the trace option. Valid values are

- Y—Use the trace option.
- blank—Do *not* use the trace option.

REMSESS

specifies the SAS/CONNECT remote session ID to be used when connecting to the R/3 system.

Details

The %R3CONNC macro lets you connect to an SAP system. This macro can be used to log on to the SAP system during batch operation.

Note: The SIDEINFO file provides the connection parameters required for SAS to communicate with the SAP system. The SIDEINFO file is not needed if you specify all connection parameters in the %RCONNC macro.

Examples**Example 1: Connect to a Specific R/3 System**

The following example shows how to use the %R3CONNC macro to connect to an R/3 system when you specify a specific application server:

```
%r3connc (CCONN=IDES, USR=USER1, PWD=D27A927AD9E768,
          CLI=800, LNG=EN, HST=HostName1, SYS=02,
          CPICUSR=CPICUSER, CPICPWD=6FD3E4BAC4);
```

In this example, USER1 is connecting to an R/3 system on an application server named HostName1 with a system number of 02.

Example 2: Connect to an R/3 System Using an SAS RFC Server

The following example shows how to use the %R3CONNC macro to connect to an R/3 system and an SAS RFC Server that runs on a specified application server:

```
%r3connc (CCONN=IDES, USR=USER1, PWD=D27A927AD9E768, CLI=800, LNG=EN,
          HOST=HostName2, PORT=6998,
          HST=HostName1, SYS=02,
          CPICUSR=CPICUSER, CPICPWD=6FD3E4BAC4);
```

In this example, SAS connects to an R/3 application server (HostName1) with system number 02 and a SAS RFC Server running on a separate host (HOSTNAME2) on port 6998.

Example 3: Connect to an R/3 System Identified by a Logical Destination

This example shows how to use the %R3CONNC macro and a SIDEINFO file to connect to an R/3 system that is identified by a logical destination:

```
%r3connc (CCONN=IDES, USR=USER1, PWD=D27A927AD9E768,
          CLI=800, LNG=EN, DST=SYSTEM1,
          CPICUSR=CPICUSER, CPICPWD=6FD3E4BAC4);
```

In this example, USER1 is connecting to an R/3 system. The R/3 system is identified by a logical destination (SYSTEM1), and the connection information is defined in the SIDEINFO file.

%R3CONNE Macro

Disconnects from an SAP system.

Type: batch macro
Data source: R/3
See: [%R3CONN B macro](#), [%R3CONNC macro](#)

Syntax

```
%R3CONNE(CCONN=value, REMSESS=value)
```

Optional Arguments**CCONN**

specifies the connection identifier that is associated with the current session.

REMSESS

specifies the SAS/CONNECT remote session identifier that is associated with the current remote session.

Details

The %R3CONNE macro lets you disconnect from the SAP system. You can use this macro to log off from the SAP system during batch operation.

Example: Disconnect from an R/3 System

The following example shows how to use the %R3CONNE macro to disconnect from an R/3 system:

```
%r3conne (CCONN=IDES);
```

In this example, the %R3CONNE macro is used to terminate the R/3 connection with an ID of IDES.

RFC_LOGON_INFO Macro Variable

Defines the connection parameters that are required to access the SAP system.

Type: optional macro variable

Applies to: %CALLRFC macro
Data source: R/3
See: [%CALLRFC macro](#) , “Using the R/3 BAPI Connector: Logon Window”

Syntax

```
%let RFC_LOGON_INFO=ID=value ID=value ... ID=value
```

Details

RFC_LOGON_INFO is a macro variable that is used with the %CALLRFC macro. The RFC_LOGON_INFO variable uses the following parameters:

Note: Values are case sensitive. IDs are not.

Table 4.1 RFC_LOGON_INFO Parameters

| Parameter ID | Description |
|--------------|---|
| TYPE | identifies the type of SAP system. Valid values are 3—(default) identifies an R/3 server E—identifies an external server. |
| CLIENT | is a required value that identifies the logon client. |
| USER | is a required value that specifies the user logon ID. |
| PASSWD | is a required value that identifies the logon password. This value is not required if a PASSWDX value is specified. |
| LANG | is a required value that identifies the logon language. Specify the one of the following: 1-byte SAP language (E for English, D for German, and so on) 2-byte ISO language (EN for English, DE for German, and so on) |
| LCHECK | specifies the logon check option at OPEN time. Valid values are 0—logon without check 1—(default) logon with check. |
| TRACE | specifies the RFC trace option. Valid values are 0—(default) without trace 1—with trace. |
| DEST | identifies the logical destination in the <code>saprfc.ini</code> file, if applicable. This value is required when you use the <code>saprfc.ini</code> file. |
| GWHOST | specifies the host name of the SAP gateway. |
| GWSERV | identifies the service of the SAP gateway. |

| Parameter ID | Description |
|--------------|---|
| MSHOST | specifies the host name of the message server if you use Load Balancing. This value is required if you use Load Balancing. |
| R3NAME | specifies the name of the SAP system if you use Load Balancing. This value is required if you use Load Balancing. |
| GROUP | specifies the name of the group of application servers if you use Load Balancing. This value is required if you use Load Balancing. |
| ASHOST | identifies the host name of the specific application server to be used. This value is required if you use a specific application server. |
| SYSNR | identifies the SAP system number if you use a specific application server and do not use Load Balancing. This value is required if you use a specific application server. |
| ABAP_DEBUG | specifies the ABAP debugger option. Valid values are 0—(default) run without the ABAP debugger 1—run with the ABAP debugger. <i>Note:</i> If you use the ABAP_DEBUG option, the SAP GUI must be installed. |
| PASSWDX | identifies the SAP logon password that is encrypted by SAS. |

Examples

Example 1: Log In to a Server That Uses Load Balancing

This example shows how to specify logon information for the %CALLRFC macro using the RFC_LOGON_INFO macro variable:

```
%let RFC_LOGON_INFO CLIENT=010 USER=USER1
                        PASSWD=USERPWD LANG=E
                        MSHOST=HostName R3NAME=BIN GROUP=Public;
%callrfc(RFC_SYSTEM_INFO
        IMPORTING RFCSI_EXPORT=WORK.RFCSI_EXPORT);
```

In this example, USER1 is connecting to a server that uses Load Balancing to read R/3 data into a temporary data set called WORK.RFCSI_EXPORT.

Example 2: Log In to a Specific Application Server

This example shows how to specify logon information for the %CALLRFC macro using the RFC_LOGON_INFO macro variable:

```
%let RFC_LOGON_INFO=CLIENT=010 USER=USER1
                        PASSWD=USERPWD LANG=E
                        ASHOST=HostName SYSNR=02;
%callrfc(RFC_SYSTEM_INFO
        IMPORTING RFCSI_EXPORT=WORK.RFCSI_EXPORT);
```

In this example, USER1 is connecting to a specific application server to read R/3 data into a temporary data set called WORK.RFCSI_EXPORT.

Chapter 5

Using the LIBNAME Statement for SAP

| | |
|---|-----------|
| Overview of the LIBNAME Engine for SAP | 40 |
| LIBNAME Statement Syntax for SAP | 40 |
| SAP LIBNAME Engine Options | 41 |
| SAS LIBNAME Statement Options for the SAP Engine | 42 |
| SAS Data Set Options for the SAP Engine | 42 |
| Dictionary | 43 |
| ABAPFM= LIBNAME Option | 43 |
| ABAP_NAMESPACE= LIBNAME Option | 43 |
| ABAPPROG= LIBNAME Option | 43 |
| ASHOST= LIBNAME Option | 44 |
| AUTHDOMAIN= LIBNAME Option | 44 |
| BATCH= LIBNAME Option | 44 |
| BUFFER_SIZE= LIBNAME Option | 45 |
| CLIENT= LIBNAME Option | 45 |
| DESTGROUP= LIBNAME Option | 46 |
| DESTINATION= LIBNAME Option | 46 |
| GROUP= LIBNAME Option | 46 |
| GWHOST= LIBNAME Option | 47 |
| GWSERV= LIBNAME Option | 47 |
| HOST= LIBNAME Option | 47 |
| IEEE_REVERSE= LIBNAME Option | 48 |
| INENCODING= LIBNAME Option | 48 |
| LANGUAGE= LIBNAME Option | 48 |
| MAX_TABLE_JOINS= LIBNAME Option | 49 |
| MODE= LIBNAME Option | 49 |
| MSHOST= LIBNAME Option | 49 |
| NUMC_SAS_TYPE= LIBNAME Option | 50 |
| PASSWORD= LIBNAME Option | 50 |
| PASSWORDX= LIBNAME Option | 51 |
| PORT= LIBNAME Option | 51 |
| R3NAME= LIBNAME Option | 51 |
| RFC_STRING= LIBNAME Option | 52 |
| SAPLOGON_ID= LIBNAME Option | 52 |
| SYSNR= LIBNAME Option | 52 |
| TRACE= LIBNAME Option | 53 |
| TRANSERRORCOMPATMODE= LIBNAME Option | 53 |
| USER= LIBNAME Option | 54 |
| CONNECTION= LIBNAME Option | 54 |
| CONNECTION_GROUP= LIBNAME Option | 55 |

| | |
|---|-----------|
| DBGEN_NAME= LIBNAME Option | 55 |
| DBPROMPT= LIBNAME Option | 55 |
| DBSASLABEL= LIBNAME Option | 56 |
| DEFER= LIBNAME Option | 56 |
| DIRECT_SQL= LIBNAME Option | 56 |
| MULTI_DATASRC_OPT= LIBNAME Option | 57 |
| REREAD_EXPOSURE= LIBNAME Option | 57 |
| SPOOL= LIBNAME Option | 57 |
| BATCH= Data Set Option | 58 |
| DBCONDITION= Data Set Option | 58 |
| DBGEN_NAME= Data Set Option | 58 |
| DBKEY= Data Set Option | 59 |
| DBMASTER= Data Set Option | 59 |
| NULLCHAR= Data Set Option | 59 |
| NULLCHARVAL= Data Set Option | 60 |
| REREAD_EXPOSURE= Data Set Option | 60 |
| Examples | 60 |
| Example 1: Accessing the SAP Server from a Local Host | 60 |
| Example 2: Changing the User Logon Language | 61 |
| Example 3: Defining an SAP Destination from the SAP Logon Utility | 61 |
| Example 4: Defining an SAP Destination from the saprfc.ini File | 61 |
| Example 5: Accessing the SAP Server with Credentials Stored in Metadata | 61 |

Overview of the LIBNAME Engine for SAP

The SAP LIBNAME engine is a read-only engine that lets you access tables and views from SAP systems. For most operating systems, the SAP LIBNAME engine makes a direct connection to the SAP system. For z/OS operating environments, the SAP LIBNAME engine accesses an SAP system through a SAS RFC Server. The SAP LIBNAME engine is part of the SAS solution to access data in an SAP system.

Note: Unlike other library engines, these interfaces are read-only and do not support any forms of data set creation, deletion, or modification.

LIBNAME Statement Syntax for SAP

LIBNAME *libref*R3 <options>;

libref

specifies a valid SAS name that serves as an alias to associate SAS with the SAP tables and view. It is any SAS name when you are assigning a new libref.

R3

explicitly specifies the R/3 library engine.

options

names one or more options honored by the R/3 engine, delimited with blanks.

The SAP LIBNAME statement assigns a library and allows the SAP engine to establish the connection to the SAP system. The SAP system checks the logon information submitted in the LIBNAME statement. The checked information includes the values for user, password, language, and client.

A user specifies a LIBNAME statement for the engine. It can then use that libref throughout SAS, wherever a libref is valid.

SAP LIBNAME Engine Options

These LIBNAME options apply to the SAP LIBNAME engine.

- “ABAPFM= LIBNAME Option” on page 43
- “ABAP_NAMESPACE= LIBNAME Option” on page 43
- “ABAPPROG= LIBNAME Option” on page 43
- “ASHOST= LIBNAME Option” on page 44
- “AUTHDOMAIN= LIBNAME Option” on page 44
- “BATCH= LIBNAME Option” on page 44
- “BUFFER_SIZE= LIBNAME Option” on page 45
- “CLIENT= LIBNAME Option” on page 45
- “DESTGROUP= LIBNAME Option” on page 46
- “DESTINATION= LIBNAME Option” on page 46
- “GROUP= LIBNAME Option” on page 46
- “GWHOST= LIBNAME Option” on page 47
- “GWSERV= LIBNAME Option” on page 47
- “HOST= LIBNAME Option” on page 47
- “IEEE_REVERSE= LIBNAME Option” on page 48
- “INENCODING= LIBNAME Option” on page 48
- “LANGUAGE= LIBNAME Option” on page 48
- “MAX_TABLE_JOINS= LIBNAME Option” on page 49
- “MODE= LIBNAME Option” on page 49
- “MSHOST= LIBNAME Option” on page 49
- “NUMC_SAS_TYPE= LIBNAME Option” on page 50
- “PASSWORD= LIBNAME Option” on page 50
- “PASSWORDX= LIBNAME Option” on page 51
- “PORT= LIBNAME Option” on page 51
- “R3NAME= LIBNAME Option” on page 51
- “RFC_STRING= LIBNAME Option” on page 52
- “SAPLOGON_ID= LIBNAME Option” on page 52
- “SYSNR= LIBNAME Option” on page 52
- “TRACE= LIBNAME Option” on page 53
- “TRANSERRORCOMPATMODE= LIBNAME Option” on page 53
- “USER= LIBNAME Option” on page 54

SAS LIBNAME Statement Options for the SAP Engine

The list below describes the SAP interface support for SAS /ACCESS LIBNAME options and presents default values where applicable. For more information, see *SAS/ACCESS for Relational Databases: Reference*.

- “CONNECTION= LIBNAME Option” on page 54
- “CONNECTION_GROUP= LIBNAME Option” on page 55
- “DBGEN_NAME= LIBNAME Option” on page 55
- “DBPROMPT= LIBNAME Option” on page 55
- “DBSASLABEL= LIBNAME Option” on page 56
- “DEFER= LIBNAME Option” on page 56
- “DIRECT_SQL= LIBNAME Option” on page 56
- “MULTI_DATASRC_OPT= LIBNAME Option” on page 57
- “REREAD_EXPOSURE= LIBNAME Option” on page 57
- “SPOOL= LIBNAME Option” on page 57

SAS Data Set Options for the SAP Engine

The list below describes the SAP interface support for SAS /ACCESS data set options and presents default values where applicable. For further information, refer to the *SAS/ACCESS for Relational Databases: Reference*.

- “BATCH= Data Set Option” on page 58
- “DBCONDITION= Data Set Option” on page 58
- “DBGEN_NAME= Data Set Option” on page 58
- “DBKEY= Data Set Option” on page 59
- “DBMASTER= Data Set Option” on page 59
- “NULLCHAR= Data Set Option” on page 59
- “NULLCHARVAL= Data Set Option” on page 60
- “REREAD_EXPOSURE= Data Set Option” on page 60

Dictionary

ABAPFM= LIBNAME Option

Indicates the name of the ABAP function module that SAS uses.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: ABAPFUNC, ABAPFUNCTION

Default: /SAS/Z_SAS_DIALOG

Data source: R/3

Syntax

ABAPFM= abap_function_name

ABAP_NAMESPACE= LIBNAME Option

Indicates the namespace for ABAP functions and programs that SAS uses.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: ABAPNAMESPACE, ABAP_NAME_SPACE, ABAPNS, ABAP_NS

Default: /SAS/

Data source: R/3

Syntax

ABAP_NAMESPACE= namespace

Details

If ABAP programs are installed in the customer namespace instead of in the /SAS/ namespace, this parameter identifies where the ABAP programs are installed.

ABAPPROG= LIBNAME Option

Indicates the name of the ABAP program that SAS uses.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: ABAPPROGRAM, ABAPREPORT

Default: /SAS/Z_SAS_READ (the ABAP function module sets this)

Data source: R/3

Syntax

ABAPPROG= abap_program

ASHOST= LIBNAME Option

Indicates the host name or IP address of a specific SAP application server.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: HST, R3HOST, RFCHOST

Default: none

Data source: R/3

Syntax

ASHOST= application_server_host

AUTHDOMAIN= LIBNAME Option

Indicates the name of the metadata-based authentication domain to use to associate user name and password credentials with an identity.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Syntax

AUTHDOMAIN= authentication_domain

Details

In a metadata-based environment, credentials for an SAP system can be stored in a metadata repository. The user can reference the authentication domain in the LIBNAME statement so that the connection to the SAP system uses the credentials stored in metadata. This is used to provide user name and password information without using the USER= and PASSWORD= LIBNAME options.

BATCH= LIBNAME Option

Indicates whether SAS should use SAP batch jobs for data extracts.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: BATCHMODE, BATCH_MODE

Default: N

Restriction: specific to SAP

Data source: R/3

Syntax

BATCH= 0 | 1 | Y | N

Required Arguments

Y | 1

specifies that SAS uses batch jobs to extract R/3 data.

N | 0

specifies that SAS uses dialog processes to extract R/3 data.

BUFFER_SIZE= LIBNAME Option

Sets the minimum buffer size for data transfers in batch and dialog modes.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: BLOCKSIZE, BLOCK_SIZE, BUFFERSIZE, BUFFSIZE

Default: 100,000 bytes

Data source: R/3

Syntax

BUFFER_SIZE=*buffersize*

Details

The number of bytes must be greater than 10,000 and no more than eight digits.

CLIENT= LIBNAME Option

Specifies the SAP logon parameter client.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: CLI, RFCCLIENT, RFCCLI

Default: SAP system default

Requirement: When you use the LIBNAME engine to access the SAP R/3 system or SAP BW system, you must specify valid logon information, including client, user name, password, and language.

Data source: R/3

Note: The SAP LIBNAME engine performs a logon check at OPEN time.

Example: 000 or 800

Syntax

CLIENT= *client*

DESTGROUP= LIBNAME Option

Indicates the name of the destination group for batch access to the SAP system when the SAP LIBNAME engine uses direct RFC calls.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: SAS1

Data source: R/3

Syntax

DESTGROUP= *destination_group*

Details

Destination groups are defined in table /SAS/DESTS in the SAP system. Table /SAS/DESTS defines a group of RFC destinations.

DESTINATION= LIBNAME Option

Indicates the destination in the saprfc.ini file if you are working with an saprfc.ini file.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: DEST, DST, DSTN

Default: none

Data source: R/3

Syntax

DESTINATION= *destination*

Details

If this is an R/3 system, you must also define the destination in the SIDEINFO file for the SAP gateway.

GROUP= LIBNAME Option

Indicates the name of the group of SAP application servers if you are using load balancing.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Syntax

GROUP= *application_server_group*

GWHOST= LIBNAME Option

Indicates the host name of the SAP gateway.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: GATEWAY_HOST

Default: none

Data source: R/3

Syntax

GWHOST= *gateway_host_name*

GWSERV= LIBNAME Option

Indicates the service of the SAP gateway.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: GATEWAY_SERVICE

Default: none

Data source: R/3

Syntax

GWSERV= *gateway_service*

HOST= LIBNAME Option

Indicates the host of the SAS RFC Server to use to connect to the SAP system.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: RFC_SERVER, RFC_SERVER_HOST, SASRFC_SERVER, SASRFC_SERVER_HOST

Default: localhost

Restriction: z/OS only

Data source: R/3

Syntax

HOST= *rfc_server_host*

IEEE_REVERSE= LIBNAME Option

Indicates whether floating-point numbers are byte-reversed.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: Y [SAP application server on Windows], N [other platforms]

Data source: R/3

Syntax

IEEE_REVERSE= Y | N

Required Arguments

Y

indicates that floating-point numbers are byte-reversed.

N

indicates that floating-point numbers are not byte-reversed.

INENCODING= LIBNAME Option

Indicates the code page.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Note: Identifies characters and symbols that can be printed, displayed on terminals, and used in SAP programs.

Syntax

INENCODING= *code_page*

LANGUAGE= LIBNAME Option

Indicates the SAP logon parameter language.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: LANG, LNG, RFCLANG, RFCLNG

Default: SAP system default

Requirement: When you use the SAP LIBNAME engine to access the SAP R/3 system or SAP BW system, you must specify valid logon information, including client, user name, password, and language.

Data source: R/3

Note: The SAP LIBNAME engine performs a logon check at OPEN time.

Example: EN, DE, or E, D

Syntax

LANGUAGE= *language*

Details

The value for language is either the 2-byte ISO-language key or the 1-byte SAP language.

MAX_TABLE_JOINS= LIBNAME Option

Indicates the number of tables that you can use in a left-outer join or an inner join in ABAP Open SQL.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: MAX_TABLE_JOIN, MAX_TABLES_JOIN, MAX_TABLES_JOINS

Default: 25

Data source: R/3

Syntax

MAX_TABLE_JOINS = *number*

MODE= LIBNAME Option

Indicates the mode for the SAP LIBNAME engine.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: DIRECT_SAP for operating environments other than z/OS. The default value for z/OS operating environments is RFC_SERVER.

Restriction: DIRECT_SAP and DIRECT values are supported on all platforms except z/OS. RFC_SERVER and SERVER values are supported only on z/OS.

Data source: R/3

Syntax

MODE= DIRECT_SAP | DIRECT | RFC_SERVER | SERVER

MSHOST= LIBNAME Option

Indicates the host name of the message server, if you are using load balancing.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Syntax

MSHOST= *message_server_host*

NUMC_SAS_TYPE= LIBNAME Option

Indicates the SAS type for ABAP type NUMC.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: NUMC, NUMC_SASTYPE, NUMC_TYPE

Default: C

Data source: R/3

Syntax

NUMC_SAS_TYPE= N | C | \$

Required Arguments

N
specifies a number.

C
specifies a character.

\$
specifies a character.

PASSWORD= LIBNAME Option

Indicates the SAP logon parameter password.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: PASS, PASSWD, PW, PWD

Default: none

Requirement: When you use the LIBNAME engine to access the SAP R/3 system or the SAP BW system, you must specify valid logon information, including client, user name, password, and language.

Data source: R/3

Note: The SAP LIBNAME engine performs a logon check at OPEN time.

Syntax

PASSWORD= *password*

PASSWORDX= LIBNAME Option

Indicates the SAP logon parameter password in an encrypted form.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: PASSWDX, PASSX, PWDX, PWX

Default: none

Data source: R/3

Syntax

PASSWORDX= *encrypted password*

Details

This option uses the encryption type that is used in SAS/ACCESS 8 Interface to R/3 and is supported for backward compatibility with that version of the connection profile.

PORT= LIBNAME Option

Indicates the port number of the SAS RFC Server to use to connect to the SAP system.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: ASRFCSERVERPORT, RFC_SERVER_PORT, SASRFC_SERVER_PORT, SRFCSERVERPORT

Default: 6999

Restriction: z/OS only

Data source: R/3

Syntax

PORT= *rfc_server_port*

R3NAME= LIBNAME Option

Indicates the name of the R/3 system.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Syntax

R3NAME= *system_name*

RFC_STRING= LIBNAME Option

Indicates additional logon or connection parameters for the RfcOpenEx() call.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: ADDITIONAL_RFC_OPTIONS, RFCOPENEX, RFCSTRING | RFC_OPTIONS_EXT

Default: none

Data source: R/3

Syntax

RFC_STRING= *additional_rfc_options*

Details

Connection parameters are used in the RfcOpenEx() call to log on to the SAP system. With this option, you can pass parameters that are not SAP LIBNAME options to the RfcOpenEx() call.

Example: RFC_STRING Example

```
RFC_STRING = "ABAP_DEBUG=1"
```

Note: When using RFC_STRING="ABAP_DEBUG=1", the ABAP debugger is invoked to debug the ABAP programs used by the engine. The SAP GUI on the SAS RFC Server host is required to use the ABAP_DEBUG=1 option.

SAPLOGON_ID= LIBNAME Option

Indicates the string that is defined for SAPLOGON on 32-bit Windows.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: none

Data source: R/3

Syntax

SAPLOGON_ID= *saplogon_id*

SYSNR= LIBNAME Option

Indicates the SAP system number—the 2-byte code that identifies the system on the host.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: SYS, SYSTEM, SYSNO

Default: none

Data source: R/3

Example: 00 or 01

Syntax

`SYSNR= system_number`

TRACE= LIBNAME Option

Indicates whether SAS should trace the RFC requests.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: 0

Data source: R/3

Syntax

`TRACE= 0 | 1 | Y | N`

Required Arguments

Y | 1

specifies that RFC trace is switched on.

N | 0

specifies that RFC trace is switched off.

Details

If you switch on the trace option, SAS writes log information into a file. The RFC library logs messages in the `dev_rfc` file.

TRANSERRORCOMPATMODE= LIBNAME Option

Indicates whether transcoding errors are reported.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: TRANSERRORCOMPATMODE=, TRANSCODEERRORCOMPATMODE=,
TRANSCODING_ERROR_COMPATIBILITY_MODE=,
TRANS_ERROR_COMPATIBILITY_MODE=, TRANS_ERROR_COMPATMODE=

Default: N

Data source: R/3

Syntax

`TRANSERRORCOMPATMODE=0 | 1 | Y | N`

Required Arguments**0 | N**

specifies that transcoding errors are reported either as a warning or an error, depending on the DATA step or procedure.

1 | Y

specifies that transcoding errors are ignored, as they were in releases prior to SAS 9.3.

Details

For a PROC SQL SELECT* FROM statement, only a warning is displayed when a transcoding error occurs.

USER= LIBNAME Option

Indicates the SAP logon parameter user.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Alias: RFCUSER, USERID, USERNAME, USR

Default: none

Requirement: When you use the LIBNAME engine to access the SAP system, you must specify valid logon information, including the client, user name, password, and language.

Data source: R/3

Note: The SAP system performs a logon check at OPEN time.

Syntax

USER= *user*

CONNECTION= LIBNAME Option

Specifies whether operations on a single libref share a connection to the DBMS and whether operations on multiple librefs share a connection to the DBMS.

Valid in: SAS/ACCESS LIBNAME statement

Default: DBMS-specific. The default value for SAP is SHAREDREAD

Data source: R/3

See: CONNECTION= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

CONNECTION= SHAREDREAD | UNIQUE | SHARED | GLOBALREAD | GLOBAL

CONNECTION_GROUP= LIBNAME Option

Causes operations on multiple librefs and on multiple pass-through facility CONNECT statements to share a connection to the DBMS.

Valid in: SAS/ACCESS LIBNAME statement

Default: none

Data source: R/3

See: CONNECTION_GROUP= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

CONNECTION_GROUP= *connection-group-name*

DBGEN_NAME= LIBNAME Option

Specifies how SAS automatically renames DBMS columns (when they contain characters that SAS does not allow, such as \$) to valid SAS variable names.

Valid in: SAS/ACCESS LIBNAME statement

Default: DBMS

Data source: R/3

See: DBGEN_NAME= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBGEN_NAME= DBMS | SAS

DBPROMPT= LIBNAME Option

Specifies whether SAS displays a window that prompts the user to enter DBMS connection information before connecting to the DBMS in interactive mode.

Valid in: SAS/ACCESS LIBNAME statement

Default: NO

Data source: R/3

See: DBPROMPT= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBPROMPT= YES | NO

DBSASLABEL= LIBNAME Option

Specifies the column labels an engine uses.

Valid in: SAS/ACCESS LIBNAME statement for SAP

Default: COMPAT

Data source: R/3

See: DBSASLABEL= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBSASLABEL= COMPAT | NONE

Required Arguments

COMPAT

specifies that the column labels are compatible with engine behavior in previous SAS releases. The SAP engine returns the short descriptive text for the columns of the SAP table. It reads the column label from the SAP data dictionary.

NONE

specifies that no column label information is returned.

DEFER= LIBNAME Option

Specifies when the connection to the DBMS occurs.

Valid in: SAS/ACCESS LIBNAME statement

Default: NO

Data source: R/3

See: DEFER= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DEFER= NO | YES

DIRECT_SQL= LIBNAME Option

Lets you specify whether generated SQL is passed to the DBMS for processing.

Valid in: SAS/ACCESS LIBNAME statement

Default: YES

Data source: R/3

See: DIRECT_SQL= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DIRECT_SQL= YES | NO | NONE | NOGENSQL | NOWHERE
| NOFUNCTIONS | NOMULTOUTJOINS

MULTI_DATASRC_OPT= LIBNAME Option

Used instead of the DBKEY= data set option to improve performance when you process a join between two data sources.

Valid in: SAS/ACCESS LIBNAME statement

Default: NONE

Data source: R/3

See: MULTI_DATASRC_OPT= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

MULTI_DATASRC_OPT= NONE | IN_CLAUSE

REREAD_EXPOSURE= LIBNAME Option

Specifies whether the SAS/ACCESS engine behaves like a random-access engine for the scope of the LIBNAME statement.

Valid in: SAS/ACCESS LIBNAME statement

Default: NO

Data source: R/3

See: REREAD_EXPOSURE= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*.

Syntax

REREAD_EXPOSURE= NO | YES

SPOOL= LIBNAME Option

Specifies whether SAS creates a utility spool file during read transactions that read data more than once.

Valid in: SAS/ACCESS LIBNAME statement

Default: YES

Data source: R/3

See: SPOOL= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

SPOOL= YES | NO

BATCH= Data Set Option

Specifies whether SAS uses SAP batch jobs for data extracts.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Alias: BATCHMODE, BATCH_MODE

Default: N

Data source: R/3

Note: The BATCH= option is specific to SAP.

Syntax

BATCH= 0 | 1 | Y | N

Required Arguments

Y | 1

SAS uses batch jobs to extract SAP data.

N | 0

SAS uses dialog processes to extract SAP data.

DBCONDITION= Data Set Option

Specifies criteria for subsetting and ordering DBMS data.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: none

Data source: R/3

See: DBCONDITION= data set option in *SAS/ACCESS for Relational Databases: Reference*.

Syntax

DBCONDITION= "DBMS-SQL-query-clause"

DBGEN_NAME= Data Set Option

Specifies how SAS automatically renames columns (when they contain characters that SAS does not allow, such as \$) to valid SAS variable names.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: DBMS

Data source: R/3

See: DBGEN_NAME= data set option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBGEN_NAME= DBMS | SAS

DBKEY= Data Set Option

Specifies a key column to optimize DBMS retrieval.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: none

Data source: R/3

See: DBKEY= data set option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBKEY= (<'>column-1<'> <... <'>column-n<'>>)

DBMASTER= Data Set Option

Indicates which is the larger table when you process a join of tables from two different types of databases.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: none

Data source: R/3

See: DBMASTER= data set option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

DBMASTER=YES

NULLCHAR= Data Set Option

Indicates how missing SAS character values are handled during insert, update, DBINDEX=, and DBKEY= processing.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: SAS

Data source: R/3

See: NULLCHAR= data set option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

NULLCHAR= SAS | YES | NO

NULLCHARVAL= Data Set Option

Defines the character string that replaces missing SAS character values during insert, update, DBINDEX=, and DBKEY= processing.

Valid in: DATA and PROC steps (when accessing DBMS data using SAS/ACCESS software)

Default: a blank character

Data source: R/3

See: NULLCHARVAL= data set option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

NULLCHARVAL= 'character-string'

REREAD_EXPOSURE= Data Set Option

Specifies whether the SAS/ACCESS engine behaves like a random-access engine for the scope of the LIBNAME statement.

Valid in: SAS/ACCESS LIBNAME statement

Default: NO

Data source: R/3

See: REREAD_EXPOSURE= LIBNAME option in *SAS/ACCESS for Relational Databases: Reference*

Syntax

REREAD_EXPOSURE= NO | YES

Examples

Example 1: Accessing the SAP Server from a Local Host

In this example for the z/OS operating environment, the SAS RFC Server has been started on the local host on port 6998. You want to access the SAP system on `sapr3srv.sup.com`. The system number for the system is 03. Specify the entire set of user information, such as client, user, password, and language. If the SAS RFC Server was started on the SAS system host on port 6999, you do not need to define the host or port because 6999 is the default.

```
libname mylib r3 user=TEST password=MYPASS client=800 language=EN
      ahost=sapr3srv.sup.com sysnr=03
      host=localhost port=6998;
```

Example 2: Changing the User Logon Language

You want to access the BW system on whjapp01 and the system number is 06. This time, you want to log on using the German language. If you log on using that language, the column labels are all in German.

```
libname bwides r3 user=Test password=pwd client=800 language=DE
      ahost=whjapp01 sysnr=06;
```

Example 3: Defining an SAP Destination from the SAP Logon Utility

The SAP system that you want to access is defined as SI9 in the SAP logon utility.

```
libname mylib r3 user=test password=secret client=800 language=E
      saplogon_id=SI9;
```

Example 4: Defining an SAP Destination from the saprfc.ini File

The SAP system that you want to access is defined by the bwides logical destination in the saprfc.ini file.

```
libname mylib r3 user=test password=secret client=800 language=EN
      destination=bwides;
```

Example 5: Accessing the SAP Server with Credentials Stored in Metadata

User name and password credentials for the SAP system that you want to access are stored in metadata. The credentials are associated with an authentication domain named SAPAuth. The SAS Metadata Server is named meta.sup.com.

```
options metaserver=meta.sup.com metauser=test metapass=secret;
libname bwides r3 authdomain=SAPAuth client=800
      language=EN ahost=sapr3srv.sup.com sysnr=03;
```


Chapter 6

The CALLRFC Procedure

| | |
|---|-----------|
| Overview: CALLRFC Procedure | 63 |
| Syntax: The CALLRFC Procedure | 63 |
| PROC CALLRFC Statement | 64 |
| CALL FUNCTION Statement | 69 |
| DESCRIBE FUNCTION Statement | 70 |
| Examples: The CALLRFC Procedure | 73 |
| Example 1: Retrieve and Display RFC_SYSTEM_INFO | 73 |
| Example 2: Use the Output Delivery System with the DESCRIBE FUNCTION Statement | 74 |

Overview: CALLRFC Procedure

The CALLRFC procedure executes Remote Function Calls (RFCs) or RFC-compatible functions on an SAP system.

Any Advanced Business Applications Programming (ABAP) function modules that the CALLRFC procedure calls must be RFC-enabled and synchronous, and have no dialog boxes.

Syntax: The CALLRFC Procedure

```

PROC CALLRFC <options>;
    CALL <FUNCTION> 'function-name'
        <EXPORTING parameter-1
            | parameter-1.field-1 =value-1 < ... parameter-n=value-n>>
        <IMPORTING parameter-1=SAS-dataset-name-1
            < ... parameter-n=SAS-dataset-name-n>>
        <INTABLES table-parameter-1=SAS-dataset-name-1
            < ... table-parameter-n=SAS-dataset-name-n>>
        <TABLES table-parameter-1=SAS-dataset-name-1
            < ... table-parameter-n=SAS-dataset-name-n>>
        <CALLBACK <callback-parameter-1=SAS-dataset-name-1
            < ... table-parameter-n=SAS-dataset-name-n>>> </ default = SAS-library>;
    DESCRIBE <FUNCTION> 'function-name' <SHORT>;

```

| Statement | Task | Example |
|----------------------|--|--------------|
| PROC CALLRFC | Specify connection and log on information for an SAP system to prepare to call an RFC or RFC-enabled module on the SAP system. | Ex. 1, Ex. 2 |
| CALL FUNCTION | Call an RFC on the RFC system. | Ex. 1 |
| DESCRIBE FUNCTION | Read metadata about an RFC and write the information to the SAS log or a SAS data set. | Ex. 2 |

PROC CALLRFC Statement

Calls the CALLRFC procedure and specifies SAP system connection and logon information. The SAP system connection established and logon information is verified.

Syntax

```
PROC CALLRFC <options>;
```

Summary of Optional Arguments

ABAPFM='abap-function-name'

specifies the name of the ABAP function module that SAS uses internally for metadata requests.

ABAPPROG='abap-program'

specifies the name of the ABAP program that SAS uses.

TRACE='RFC-trace-flag'

allows tracing of RFC requests.

Specify connection and logon parameters

LIBREF='SAP-engine-libref'

specifies the libref for the library that is used to access the SAP system using connection and logon parameters.

RFC_STRING='additional-RFC-options'

specifies additional logon or connection parameters for the RfcOpenEx() call.

Specify connection parameters

ASHOST='SAP-application-server-host'

specifies the host name or IP address of a specific application server.

DESTINATION='SAP-destination'

specifies the destination that is defined in saprfc.ini, if you are working with that file to connect to the SAP system.

GROUP='SAP-application-server-group'

specifies the name for a group of application servers when the SAP system is configured for load balancing..

GWHOST='SAP-gateway-host-name'

specifies the host name of the SAP gateway.

GWSERV='SAP-gateway-service'

MSHOST='SAP-message-server-host'

specifies the host name of the Message Server for the SAP system when the SAP system is configured for load balancing..

R3NAME='SAP-system-name'

specifies the name of the SAP R/3 system when the SAP system is configured for load balancing.

SAPLOGON_ID='SAP-logon-id'

specifies the string defined for SAPLOGON on 32-bit Windows.

SYSNR=SAP-system-number

specifies the SAP R/3 system number.

Specify data type and handling options

IEEE_REVERSE=flag

specifies whether floating-point numbers are byte-reversed.

NUMC_SAS_TYPE='N'|'C'|'S'

specifies the SAS data type for the ABAP type NUMC.

Specify logon parameters

CLIENT=SAP-client-number

specifies the SAP logon parameter for client.

LANGUAGE= SAP-logon-language

specifies the SAP logon parameter for language.

PASSWORD='SAP-password'

specifies the SAP logon parameter for password.

PASSWORDX='encrypted-SAP-password'

specifies the SAP logon parameter for password in an encrypted form.

USER=SAP-userID

specifies the SAP logon parameter for user.

Specify SAS RFC Server parameters (z/OS only)

HOST='RFC-server-host'

specifies the host name of the SAS RFC Server.

MODE=DIRECT_SAP|RFC_SERVER

specifies the mode for the CALLRFC procedure.

PORT='RFC-server-port'

specifies the port number of the SAS RFC Server that is used to connect to the SAP system.

Optional Arguments

ABAPFM='abap-function-name'

specifies the name of the ABAP function module that SAS uses internally for metadata requests.

Alias ABAPFUNCTION=, ABAPFUNC=

Default Z_SAS_DIALOG

Note This option is not the name of the ABAP function that is called in the CALL FUNCTION statement.

ABAPPROG='abap-program'

specifies the name of the ABAP program that SAS uses.

Alias ABAPREPORT=, ABAPPROGRAM=

Default Z_SAS_READ (set by the ABAP function module)

ASHOST='SAP-application-server-host'

specifies the host name or IP address of a specific application server.

Alias HST=, RFCHOST=, R3HOST=

Note This option is used for SAP R/3 when it is not configured for load balancing.

CLIENT=SAP-client-number

specifies the SAP logon parameter for client.

Alias CLI=, RFCCLIENT=, RFCCLI=

Default SAP system default

Requirement This is a required SAP LIBNAME engine option.

Note The SAP system performs a logon check at OPEN time.

Example 000 or 800 (for a client)

DESTINATION='SAP-destination'

Alias DEST=, DST=, DSTN=

Requirement If the SAP system is an R/3 system, you must also define this destination in the SIDEINFO file for the SAP gateway.

GROUP='SAP-application-server-group'**GWHOST='SAP-gateway-host-name'**

specifies the host name of the SAP gateway.

Alias GATEWAY_HOST=

GWSERV='SAP-gateway-service'

specifies the service of the SAP gateway.

Alias GATEWAY_SERVICE

HOST='RFC-server-host'

specifies the host name of the SAS RFC Server. This option is supported in operating environments .

Alias RFC_SERVER_HOST=, RFC_SERVER=, SASRFC_SERVER=, SASRFC_SERVER_HOST=

Default localhost

z/OS specifics z/OS only

IEEE_REVERSE=flag

specifies whether floating-point numbers are byte-reversed.

| | |
|-----------------|---|
| Alias | IE3_REVERSE |
| Defaults | Y (when the SAP R/3 application server is running on Windows) |
| | N (for all other platforms) |

LANGUAGE=*SAP-logon-language*

specifies the SAP logon parameter for language.

| | |
|----------------|--|
| Alias | LANG=, LNG=, RFCLANG=, RFCLNG= |
| Default | The default value for this option is the SAP system default. |
| Notes | The value for language is either the 2-byte ISO-language key or the 1-byte SAP language. |
| | The SAP system performs a logon check at OPEN time. |
| Example | EN, DE or E, D |

LIBREF=*SAP-engine-libref*

Note Connection and logon information is copied from the libref. As a result, this is the easiest way to use PROC CALLRFC.

MODE=DIRECT_SAP|RFC_SERVER

| | |
|-----------------|--|
| Defaults | RFC_SERVER (z/OS) |
| | DIRECT_SAP (all other hosts) |
| Note | If DIRECT_SAP is specified, the SAP LIBNAME engine uses RFC calls to the SAP system directly. If RFC_SERVER is specified, a SAS RFC Server is used to communicate with the SAP system. |

MSHOST='*SAP-message-server-host*'**NUMC_SAS_TYPE=**'N'|'C'|'S'

specifies the SAS data type for the ABAP type NUMC.

| | |
|--------------|---|
| Alias | NUMC_SASTYPE=, NUMC_TYPE=, NUMC= |
| Notes | The %R3CONNC macro sets this option to N by default. |
| | In SAS 8 generated views, it was N, but C is a better match. Setting NUMC_SAS_TYPE='N' ensures SAS 8 compatibility. |

PASSWORD='*SAP-password*'

specifies the SAP logon parameter for password.

| | |
|--------------|---|
| Alias | PASSWD=, PWD=, PW=, PASS= |
| Notes | When using the SAP LIBNAME engine, either use the USER and PASSWORD options to specify logon credentials, or use the AUTHDOMAIN option to retrieve credentials from metadata. |
| | If single sign-on is used, this option is not needed. |
| | The SAP system performs a logon check at OPEN time. |

PASSWORDX='encrypted-SAP-password'

specifies the SAP logon parameter for password in an encrypted form.

Alias PASSWDX=, PWDX=, PWX=, PASSX=

Note This option uses the encryption available with SAS/ACCESS Interface to R/3 for SAS 8. It is supported for compatibility with the SAS 8 connection profile.

PORT='RFC-server-port'

Alias RFC_SERVER_PORT=, RFCSERVERPORT=,
SASRFC_SERVER_PORT=, SASRFCSERVERPORT=

Default 6999

z/OS specifics z/OS only

R3NAME='SAP-system-name'**RFC_STRING='additional-RFC-options'**

specifies additional logon or connection parameters for the RfcOpenEx() call.

Alias RFCSTRING=, RFC_OPTIONS_EXT=, RFCOPENEX=,
ADDITIONAL_RFC_OPTIONS=

Note This call is used to log on the SAP system. Using it allows passing parameters to the RfcOpenEx call that are not SAP LIBNAME engine options. It can be used to support future extensions of the RfcOpenEx call.

SAPLOGON_ID='SAP-logon-id'

specifies the string defined for SAPLOGON on 32-bit Windows.

SYSNR=SAP-system-number

specifies the SAP R/3 system number.

Alias SYS=, SYSTEM=, SYSNO=

Note This option is used for SAP R/3 when it is not configured for load balancing.

TRACE='RFC-trace-flag'

Default 0 or N (disables RFC tracing)

Notes 1 or Y (allows RFC tracing)

This option determines whether the SAP RFC library traces the RFC requests.

The default directory location is read from the RFC_TRACE_DIR environment variable. The RFC library logs messages in the dev_rfc file in the same directory.

USER=SAP-userID

specifies the SAP logon parameter for user.

Alias USR=, RFCUSER=, USERNAME=, USERID=

Notes When using the SAP LIBNAME engine, use either the USER= and PASSWORD= options to specify logon credentials, or use the AUTHDOMAIN= option to retrieve credentials from metadata.

This option is not needed if you use single sign-on.

The SAP system performs a logon check at OPEN time.

CALL FUNCTION Statement

Call an RFC on the SAP system. The CALL FUNCTION statement can be called multiple times within a PROC CALLRFC step. The function calls are executed in sequence.

Syntax

```
CALL <FUNCTION> 'function-name'
  <EXPORTING parameter-1 | parameter-1.field-1=value-1
  < ... parameter-n=value-n>>
  <IMPORTING parameter-1=SAS-dataset-name-1
  < ... parameter-n=SAS-dataset-name-n>>
  <INTABLES table-parameter-1=SAS-dataset-name-1
  <... table-parameter-n=SAS-dataset-name-n>>
  <TABLES table-parameter-1=SAS-dataset-name-1
  <... table-parameter-n=SAS-dataset-name-n>>
  <CALLBACK <callback-parameter-1=SAS-dataset-name-1
  <... table-parameter-n=SAS-dataset-name-n>>> </ default = SAS-library>;
```

Required Argument

function-name

specifies the name of the ABAP function. The function name is a literal, and it must be enclosed in quotation marks. The function name is converted to uppercase characters. The ABAP function must be RFC callable. It must not have any dialog, and it must be synchronous.

Optional Arguments

EXPORTING

specifies fields or structures to be passed to the function module. The parameters parameter-1 through parameter-n are defined in the function interface as import parameters.

IMPORTING

specifies the fields or structures to be passed from the function module back to the SAS system. The parameters parameter-1 through parameter-n are defined in the function interface as export parameters.

INTABLES

specifies the SAS data sets to be passed to the function module. The parameters table-parameter-1 through table-parameter-n are defined in the function interface as table parameters. SAS converts the SAS data sets into internal tables and passes it to the function module. The variable names in the SAS data set must match the field names of the internal table as defined for the function interface.

TABLES

specifies names for the SAS data sets to be created from the internal tables in the function module. The parameters table-parameter-1 through table-parameter-n are defined in the function interface as table parameters.

CALLBACK

specifies names for the SAS data sets to be created from the internal tables in the function module. The parameters are not defined in the function interface. The function module must implement a callback mechanism.

If the callback table name matches any of the names in the list of callback-parameters specified in the function call, the data is saved into the specified SAS data set. If the name does not match, but the default library is specified, then the data is written to *libref.table-name*.

DESCRIBE FUNCTION Statement

Reads metadata about an RFC and writes the information to the SAS log or to a SAS data set using ODS. The DESCRIBE FUNCTION statement can be called multiple times within a PROC CALLRFC step.

Syntax

```
DESCRIBE <FUNCTION> 'function-name' <SHORT>;
```

Required Argument*function-name*

specifies the name of the ABAP function. The function name is a literal and it must be enclosed in quotation marks. The function name is converted to uppercase characters.

Optional Argument**SHORT**

specifies that parameter metadata only is printed in the SAS log. The field metadata is not printed.

Details**General Attributes**

In SAS listing output, the function name is printed. If ODS output is redirected to a SAS data set, here is the structure of the data set:

| Name | Type | Label | Description |
|---------|------|-------|--|
| Label1 | | | contains the attribute name, 'Function Name' |
| cValue1 | | | contains the value for character attributes (for example, 'RFC_SYSTEM_INFO') |

| Name | Type | Label | Description |
|---------|------|-------|--|
| nValue1 | | | contains the value for numeric attributes. For the CALLRFC procedure no numeric attributes are listed. |

Parameters

For each parameter, the following information is provided. If ODS output is redirected to SAS data sets, here is the structure of the data set:

| Name | Type | Label | Description |
|----------|----------|-------------------------------|---|
| class | Text 1 | Class | Parameter class: <ul style="list-style-type: none"> • I for input • O for output • T for table |
| name | Text 32 | Parameter | Parameter name |
| intlen | Number 8 | Internal length | Internal length in byte (ABAP) |
| leng | Number 8 | Length (number of characters) | |
| outlen | Number 8 | Output length | |
| decimals | Number 8 | Number of decimal places | |
| datatype | Text 5 | ABAP data type | |
| inttype | Text 1 | ABAP data type (internal) | |
| label | Text 256 | Label | |
| type | Number 8 | Variable Type | SAS variable type <ul style="list-style-type: none"> • 0 - no type, might be a structure • 1 - numeric • 2 - character |
| length | Number 8 | Variable Length | SAS variable length |
| format | Text 32 | Variable Format | SAS variable format |
| formatl | Number 8 | Format Length | SAS variable format length |
| formatd | Number 8 | Number of Format Decimals | SAS variable format decimals |
| informat | Text 32 | Variable Informat | SAS variable informat |

| Name | Type | Label | Description |
|---------|----------|-----------------------------|--------------------------------|
| informl | Number 8 | Informat Length | SAS variable informat length |
| informd | Number 8 | Number of Informat Decimals | SAS variable informat decimals |

Columns

For each column of each structure (input, output, and tables), information in this table is listed. If ODS output is redirected to SAS data sets, here is the structure of the data set:

| Name | Type | Label | Description |
|----------|----------|-------------------------------|---|
| parm | Text 32 | Parameter | |
| name | Text 32 | Column | |
| offset | Number 8 | Offset | |
| leng | Number 8 | Length (number of characters) | |
| intlen | Number 8 | Internal length | |
| outlen | Number 8 | Output length | |
| decimals | Number 8 | Number of decimal places | |
| datatype | Text 5 | ABAP data type | |
| inttype | Text 1 | ABAP data type (internal) | |
| label | Text 256 | Label | |
| type | Number 8 | Variable Type | SAS variable type <ul style="list-style-type: none"> • 0 - no type, might be a structure • 1 - numeric • 2 - character |
| length | Number 8 | Variable Length | SAS variable length |
| format | Text 32 | Variable Format | SAS variable format |
| formatl | Number 8 | Format Length | SAS variable format length |
| formatd | Number 8 | Number of Format Decimals | SAS variable format decimals |
| informat | Text 32 | Variable Informat | SAS variable informat |

| Name | Type | Label | Description |
|-----------|----------|-----------------------------|--------------------------------|
| informatl | Number 8 | Informat Length | SAS variable informat length |
| informatd | Number 8 | Number of Informat Decimals | SAS variable informat decimals |

Examples: The CALLRFC Procedure

Example 1: Retrieve and Display RFC_SYSTEM_INFO

Program

```
proc callrfc ahost="sapr3srv.sup.com" sysnr='03' user='USER'
    passwd='PASS' client='800';
    call 'RFC_SYSTEM_INFO' importing rfcsi_export=work.rfcsi;
run;

proc transpose data=rfcsi out=rfcsi_transposed
    (drop=_name_ rename=(col2=Value _label_=Column));
    var _character_ _numeric_;
run;

proc print data=rfcsi_transposed;
run;
```

Output: Listing

| Obs | Column | Value |
|-----|--|-----------------|
| 1 | RFC log version | 011 |
| 2 | Character set (SAP name) | 1100 |
| 3 | Integer format (1 / 2 = little / big endian) | LIT |
| 4 | Floating point format (1=IEEE, 2=IBM/370 format) | IE3 |
| 5 | Logical destination (specified in function call) | sapr3srv_SRV_03 |
| 6 | Character field of length 8 | sapr3srv |
| 7 | R/3 system, name of R/3 system | SRV |
| 8 | R/3 system, name of R/3 system | SRV |
| 9 | Database host name | sapr3srv |
| 10 | R/3 system, name of central database system | MSSQL |
| 11 | R/3 system, system release | 46C |
| 12 | RFC: SAP machine ID | 560 |
| 13 | R/3 system, operating system of application server | Windows NT |
| 14 | Time zone (difference from UTC in seconds) | -18000 |
| 15 | Date and time, Daylight savings time flag | X |
| 16 | IP address | 192.168.1.111 |
| 17 | Kernel Release | 46D |
| 18 | R/3 system, Name of application server | sapr3srv |
| 19 | Reserve field in RFCSI | |

Example 2: Use the Output Delivery System with the DESCRIBE FUNCTION Statement

This example shows using the Output Delivery System (ODS) to redirect the output for the DESCRIBE FUNCTION statement to SAS data sets. The WORK.RFC_PARM, WORK.RFC_ATTR and WORK.RFC_COLS output data sets are created with the metadata information about function RFC_SYSTEM_INFO.

Program

```
ods listing close;
ods output parameter=rfc_parm attributes=rfc_attr column=rfc_cols;
proc callrfc user='USER' passwd='PASS' client='800'
  lang='EN' ahost='sapr3srv.sup.com' sysnr='03';

  describe function 'RFC_SYSTEM_INFO';
run;
ods output close;
```

Index

Special Characters

%CALLRFC macro 26
 %R3CONNB macro 30, 31
 %R3CONNC macro 31, 33
 %R3CONNE macro 34

A

ABAP Function module 10, 43
 ABAP functions and programs
 namespace for 43
 ABAP program name
 RFC Server 43
 ABAP Report module 10
 ABAP type NUMC
 SAS type for 50
 ABAP_NAMESPACE= LIBNAME
 option 43
 ABAPFM= LIBNAME option for SAP
 43
 ABAPFM= option
 PROC CALLRFC statement 65
 ABAPPROG= LIBNAME option 43
 ABAPPROG= option
 PROC CALLRFC statement 66
 ASHOST= LIBNAME option 44
 ASHOST= option
 PROC CALLRFC statement 66
 AUTHDOMAIN= LIBNAME option 44
 authentication domain
 name of 44

B

BAPI connection parameters 22
 batch jobs, for data extracts 44, 58
 batch mode, RFC Server in 19
 batch operations 23
 passwords 24
 source parameter 24
 BATCH= data set option 58

BATCH= LIBNAME option 44
 buffer size
 minimum for data transfers 45
 BUFFER_SIZE= LIBNAME option 45

C

CALL FUNCTION statement
 CALLRFC procedure 69
 CALLBACK option
 CALL FUNCTION statement (RFC)
 70
 CALLRFC procedure 63, 64
 ODS with DESCRIBE FUNCTION
 statement 74
 syntax 64
 task tables 64
 CLIENT= LIBNAME option 45
 CLIENT= option
 PROC CALLRFC statement 66
 code page 48
 column information 72
 connecting to R/3 systems 33
 connecting to SAP system
 using a profile 30
 using an identifier 31
 connection parameters 34
 CONNECTION_GROUP= LIBNAME
 option 55
 CONNECTION= LIBNAME option 54

D

data access methods
 extract management method 9, 11
 Remote Function Call (RFC) 10
 secure network communications 11
 data extracts
 batch mode 44, 58
 data set options
 SAP engine 42

- data transfers
 - minimum buffer size for 45
 - DBCONDITION= data set option 58
 - DBGEN_NAME= data set option 58
 - DBGEN_NAME= LIBNAME option 55
 - DBKEY= data set option 59
 - DBMASTER= data set option 59
 - DBMS columns
 - labels 56
 - renaming 55, 58
 - DBMS connections 54, 55
 - prompts for 55
 - timing of 56
 - DBMS data
 - subsetting and ordering 58
 - DBPROMPT= LIBNAME option 55
 - DBSASLABEL= LIBNAME option 56
 - DEFER= LIBNAME option 56
 - DESCRIBE FUNCTION statement
 - CALLRFC procedure 70, 74
 - DESTGROUP= LIBNAME option 46
 - destination groups
 - name of 46
 - DESTINATION= LIBNAME option 46
 - DESTINATION= option
 - PROC CALLRFC statement 66
 - DIRECT_SQL= LIBNAME option 56
 - disconnecting from R/3 systems 34
 - disconnecting from SAP system
 - using a profile 30
 - using an identifier 34
- E**
- exporting metadata
 - to SAS/Warehouse Administrator 5
 - EXPORTING option
 - CALL FUNCTION statement (RFC) 69
 - extract management method 9, 11
 - data transfer and use 11
 - installation and setup 11
- F**
- floating point numbers 48
 - functions
 - calling R/3 function modules 26
 - name of 70
- G**
- generated SQL
 - passing to DBMS 56
 - GROUP= LIBNAME option 46
 - GROUP= option
 - PROC CALLRFC statement 66
 - GWHOST= LIBNAME option 47
 - GWHOST= option
 - PROC CALLRFC statement 66
 - GWSERV= LIBNAME option 47
 - GWSERV= option
 - PROC CALLRFC statement 66
- H**
- Help 7
 - HOST= LIBNAME option 47
 - HOST= option
 - PROC CALLRFC statement 66
- I**
- IEEE_REVERSE= LIBNAME option 48
 - IEEE_REVERSE= option
 - PROC CALLRFC statement 66
 - IMPORTING option
 - CALL FUNCTION statement (RFC) 69
 - INENCODING= LIBNAME option 48
 - INTABLES option
 - CALL FUNCTION statement (RFC) 69
- J**
- joins
 - number of tables 49
 - performance and 57, 59
 - table size 59
- L**
- LANGUAGE= LIBNAME option 48
 - LANGUAGE= option
 - PROC CALLRFC statement 67
 - LIBNAME engine
 - mode for 49
 - LIBNAME statement for SAP 40
 - ABAP_NAMESPACE= option 43
 - ABAPFM= option 43
 - ABAPPROG= option 43
 - ASHOST= option 44
 - AUTHDOMAIN= option 44
 - BATCH= option 44
 - BUFFER_SIZE= option 45
 - CLIENT= option 45
 - CONNECTION_GROUP= option 55
 - CONNECTION= option 54
 - DESTGROUP= option 46
 - DESTINATION= option 46
 - engine options 41

GROUP= option 46
 GWHOST= option 47
 GWSERV= option 47
 HOST= option 47
 IEEE_REVERSE= option 48
 INENCODING= option 48
 LANGUAGE= option 48
 LIBNAME options 42
 MAX_TABLE_JOINS= option 49
 MHOST= option 49
 MODE= option 49
 NUMC_SAS_TYPE= option 50
 PASSWORD= option 50
 PASSWORDX= option 51
 PORT= option 51
 R3NAME= option 51
 RFC_STRING= option 52
 SAPLOGON_ID= option 52
 SYSNR= option 52
 TRANSERRORCOMPATMODE=
 option 53
 USER= option 54
 LIBREF= option
 PROC CALLRFC statement 67
 logging on 1
 logon parameter client 45

M

macro variables 21
 RFC_LOGON_INFO 34
 macros 21
 %CALLRFC 26
 %R3CONN 30, 31
 %R3CONN 31, 33
 %R3CONNE 34
 MAX_TABLE_JOINS= LIBNAME
 option 49
 message server
 host name 49
 metadata 70
 exporting to SAS/Warehouse
 Administrator 5
 searching 3
 MHOST= LIBNAME option 49
 missing values 59, 60
 MODE= LIBNAME option 49
 MODE= option
 PROC CALLRFC statement 67
 MSHOST= option
 PROC CALLRFC statement 67
 MULTI_DATASRC_OPT= LIBNAME
 option 57

N

NULLCHAR= data set option 59
 NULLCHARVAL= data set option 60
 NUMC_SAS_TYPE= LIBNAME option
 50
 NUMC_SAS_TYPE= option
 PROC CALLRFC statement 67

O

ODS
 with DESCRIBE FUNCTION statement
 (CALLRFC) 74
 ordering DBMS data 58

P

parameter information 71
 parameters
 connection 34
 password, encrypted form 51
 PASSWORD= option 50
 PROC CALLRFC statement 67
 passwords
 for batch operations 24
 SAP logon parameter 50
 PASSWORDX= LIBNAME option 51
 PASSWORDX= option
 PROC CALLRFC statement 68
 PORT= LIBNAME option 51
 PORT= option
 PROC CALLRFC statement 68
 PROC CALLRFC statement 64
 profiles
 connecting or disconnecting with 31
 creating 1
 predefined 1

R

R/3 1
 connecting to R/3 systems 33
 disconnecting from R/3 systems 34
 logging on 1
 starting 1
 system name 51
 system number 52
 R/3 BAPI Connector: Logon window 22
 R3NAME= LIBNAME option 51
 R3NAME= option
 PROC CALLRFC statement 68
 random access engine
 SAS/ACCESS engine as 57
 read transactions
 utility spool file 57
 Remote Function Call (RFC) 10

- reports for transcoding errors 53
 - REREAD_EXPOSURE= data set option 60
 - REREAD_EXPOSURE= LIBNAME option 57
 - RFC (Remote Function Call) 10
 - RFC calls 69
 - RFC metadata 70
 - RFC Server 15
 - ABAP Function module name 43
 - ABAP program name 43
 - batch jobs for data extracts 58
 - batch mode 19
 - host for connecting to SAP 47
 - macros and macro variables 21
 - port number 51
 - R/3 BAPI Connector: Logon window 22
 - tracing requests 53
 - UNIX 15
 - Windows 17
 - RFC_LOGON_INFO macro variable 34
 - RFC_STRING option 12
 - RFC_STRING= LIBNAME option 52
 - RFC_STRING= option
 - PROC CALLRFC statement 68
 - RfcOpenEx() call
 - additional logon or connection parameters 52
- S**
- SAP application servers
 - host name or IP address 44
 - name of the group of 46
 - SAP destination
 - defining from SAP logon utility 61
 - defining from saprfc.ini file 61
 - SAP engine
 - data set options 42
 - SAP gateway
 - host name of 47
 - service of 47
 - SAP LIBNAME engine 41
 - mode for 49
 - SAP logon parameter
 - language for 48
 - password 50
 - password, encrypted form 51
 - user name 54
 - SAP logon parameter client 45
 - SAP logon utility
 - defining SAP destination from 61
 - SAP server
 - accessing from local host 60
 - SAP system
 - connecting to 30, 31
 - disconnecting from 30, 34
 - SAPLOGON
 - string defined for 52
 - SAPLOGON_ID= LIBNAME option 52
 - SAPLOGON_ID= option
 - PROC CALLRFC statement 68
 - saprfc.ini file 12
 - defining SAP destination from 61
 - destination indication 46
 - SAS/ACCESS engine
 - as random access engine 57, 60
 - SAS/Warehouse Administrator
 - exporting metadata to 5
 - searching metadata 3
 - secure network communications (SNC) 11
 - SHORT option
 - DESCRIBE FUNCTION statement (CALLRFC) 70
 - source parameter 24
 - SPOOL= LIBNAME option 57
 - subsetting DBMS data 58
 - SYSNR= LIBNAME option 52
 - SYSNR= option
 - PROC CALLRFC statement 68
- T**
- TABLES option
 - CALL FUNCTION statement (RFC) 70
 - TRACE= LIBNAME option 53
 - TRACE= option
 - PROC CALLRFC statement 68
 - transcoding errors
 - reports 53
 - TRANSERRORCOMPATMODE= LIBNAME option 53
 - tutorial 1
- U**
- UNIX
 - RFC Server on 15
 - user logon language 61
 - USER= LIBNAME option 54
 - USER= option
 - PROC CALLRFC statement 68
 - utility spool file
 - for read transactions 57
- W**
- Windows
 - RFC Server on 17