



THE
POWER
TO KNOW.

SAS/STAT[®] 9.22 User's Guide
The TPSPLINE Procedure
(Book Excerpt)



This document is an individual chapter from *SAS/STAT® 9.22 User's Guide*.

The correct bibliographic citation for the complete manual is as follows: SAS Institute Inc. 2010. *SAS/STAT® 9.22 User's Guide*. Cary, NC: SAS Institute Inc.

Copyright © 2010, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a Web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

U.S. Government Restricted Rights Notice: Use, duplication, or disclosure of this software and related documentation by the U.S. government is subject to the Agreement with SAS Institute and the restrictions set forth in FAR 52.227-19, Commercial Computer Software-Restricted Rights (June 1987).

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513.

1st electronic book, May 2010

SAS® Publishing provides a complete selection of books and electronic products to help customers use SAS software to its fullest potential. For more information about our e-books, e-learning products, CDs, and hard-copy books, visit the SAS Publishing Web site at support.sas.com/publishing or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are registered trademarks or trademarks of their respective companies.

Chapter 90

The TPSPLINE Procedure

Contents

Overview: TPSPLINE Procedure	7541
Penalized Least Squares Estimation	7542
PROC TPSPLINE with Large Data Sets	7544
Getting Started: TPSPLINE Procedure	7544
Syntax: TPSPLINE Procedure	7553
PROC TPSPLINE Statement	7554
BY Statement	7559
FREQ Statement	7559
ID Statement	7559
MODEL Statement	7560
SCORE Statement	7562
OUTPUT Statement	7563
Details: TPSPLINE Procedure	7564
Computational Formulas	7564
ODS Table Names	7568
ODS Graphics	7569
Examples: TPSPLINE Procedure	7570
Example 90.1: Partial Spline Model Fit	7570
Example 90.2: Spline Model with Higher-Order Penalty	7572
Example 90.3: Multiple Minima of the GCV Function	7577
Example 90.4: Large Data Set Application	7582
Example 90.5: Computing a Bootstrap Confidence Interval	7586
References	7594

Overview: TPSPLINE Procedure

The TPSPLINE procedure uses the penalized least squares method to fit a nonparametric regression model. It computes thin-plate smoothing splines to approximate smooth multivariate functions observed with noise. The TPSPLINE procedure allows great flexibility in the possible form of the regression surface. In particular, PROC TPSPLINE makes no assumptions of a parametric form for the model. The generalized cross validation (GCV) function can be used to select the amount of smoothing.

The TPSPLINE procedure complements the methods provided by the standard SAS regression procedures such as the GLM, REG, and NLIN procedures. These procedures can handle most situations in which you specify the regression model and the model is known up to a fixed number of parameters. However, when you have no prior knowledge about the model, or when you know that the data cannot be represented by a model with a fixed number of parameters, you can use the TPSPLINE procedure to model the data.

The TPSPLINE procedure uses the penalized least squares method to fit the data with a flexible model in which the number of effective parameters can be as large as the number of unique design points. Hence, as the sample size increases, the model space also increases, enabling the thin-plate smoothing spline to fit more complicated situations.

The main features of the TPSPLINE procedure are as follows:

- provides penalized least squares estimates
- supports the use of multidimensional data
- supports multiple SCORE statements
- fits both semiparametric models and nonparametric models
- provides options for handling large data sets
- supports multiple dependent variables
- enables you to choose a particular model by specifying the model degrees of freedom or smoothing parameter
- supports graphical displays produced through ODS Graphics

Penalized Least Squares Estimation

Penalized least squares estimation provides a way to balance fitting the data closely and avoiding excessive roughness or rapid variation. A penalized least squares estimate is a surface that minimizes the penalized least squares over the class of all surfaces that satisfy sufficient regularity conditions.

Define \mathbf{x}_i as a d -dimensional covariate vector from an $n \times d$ matrix \mathbf{X} , \mathbf{z}_i as a p -dimensional covariate vector, and y_i as the observation associated with $(\mathbf{x}_i, \mathbf{z}_i)$. Assuming that the relation between \mathbf{z}_i and y_i is linear but the relation between \mathbf{x}_i and y_i is unknown, you can fit the data by using a semiparametric model as follows:

$$y_i = f(\mathbf{x}_i) + \mathbf{z}_i \boldsymbol{\beta} + \epsilon_i$$

where f is an unknown function that is assumed to be reasonably smooth, $\epsilon_i, i = 1, \dots, n$, are independent, zero-mean random errors, and $\boldsymbol{\beta}$ is a p -dimensional unknown parametric vector.

This model consists of two parts. The $\mathbf{z}_i \boldsymbol{\beta}$ is the parametric part of the model, and the \mathbf{z}_i are the regression variables. The $f(\mathbf{x}_i)$ is the nonparametric part of the model, and the \mathbf{x}_i are the smoothing variables. The ordinary least squares method estimates $f(\mathbf{x}_i)$ and $\boldsymbol{\beta}$ by minimizing the quantity:

$$\frac{1}{n} \sum_{i=1}^n (y_i - f(\mathbf{x}_i) - \mathbf{z}_i \boldsymbol{\beta})^2$$

However, the functional space of $f(\mathbf{x})$ is so large that you can always find a function f that interpolates the data points. In order to obtain an estimate that fits the data well and has some degree of smoothness, you can use the penalized least squares method.

The penalized least squares function is defined as

$$S_\lambda(f) = \frac{1}{n} \sum_{i=1}^n (y_i - f(\mathbf{x}_i) - \mathbf{z}_i \boldsymbol{\beta})^2 + \lambda J_2(f)$$

where $J_2(f)$ is the penalty on the roughness of f and is defined, in most cases, as the integral of the square of the second derivative of f .

The first term measures the goodness of fit and the second term measures the smoothness associated with f . The λ term is the smoothing parameter, which governs the tradeoff between smoothness and goodness of fit. When λ is large, it more heavily penalizes rougher fits. Conversely, a small value of λ puts more emphasis on the goodness of fit.

The estimate f_λ is selected from a reproducing kernel Hilbert space, and it can be represented as a linear combination of a sequence of basis functions. Hence, the final estimates of f can be written as

$$\hat{f}_\lambda(\mathbf{x}_i) = \theta_0 + \sum_{j=1}^d \theta_j \mathbf{x}_{i,j} + \sum_{j=1}^p \delta_j B_j(\mathbf{x}_j)$$

where B_j is the basis function, which depends on where the data \mathbf{x}_i are located, and $\boldsymbol{\theta} = \{\theta_0, \dots, \theta_d\}$ and $\boldsymbol{\delta} = \{\delta_1, \dots, \delta_p\}$ are the coefficients that need to be estimated.

For a fixed λ , the coefficients $(\boldsymbol{\theta}, \boldsymbol{\delta}, \boldsymbol{\beta})$ can be estimated by solving an $n \times n$ system.

The smoothing parameter can be chosen by minimizing the generalized cross validation (GCV) function.

If you write

$$\hat{\mathbf{y}} = \mathbf{A}(\lambda)\mathbf{y}$$

then $\mathbf{A}(\lambda)$ is referred to as the *hat* or *smoothing* matrix, and the GCV function $GCV(\lambda)$ is defined as

$$GCV(\lambda) = \frac{(1/n)\|(\mathbf{I} - \mathbf{A}(\lambda))\mathbf{y}\|^2}{[(1/n)\text{tr}(\mathbf{I} - \mathbf{A}(\lambda))]^2}$$

PROC TPSPLINE with Large Data Sets

The calculation of the penalized least squares estimate is computationally intensive. The amount of memory and CPU time needed for the analysis depends on the number of unique design points, which corresponds to the number of unknown parameters to be estimated.

You can specify the `D=` option in the `MODEL` statement to reduce the number of unknown parameters. The option groups design points by the specified range (see the `D=` option on page 7560).

`PROC TPSPLINE` selects one design point from the group and treats all observations in the group as replicates of that design point. Calculation of the thin-plate smoothing spline estimates is based on the reprocessed data. The way to choose the design point from a group depends on the order of the data. Hence, different orders of input data might result in different estimates.

By combining several design points into one, this option reduces the number of unique design points, thereby approximating the original data. The value you specify for the `D=` option determines the width of the range used to group the data.

Getting Started: TPSPLINE Procedure

The following example demonstrates how you can use the `TPSPLINE` procedure to fit a semiparametric model.

Suppose that y is a continuous variable and x_1 and x_2 are two explanatory variables of interest. To fit a bivariate thin-plate spline model, you can use a `MODEL` statement similar to that used in many regression procedures in the SAS System:

```
proc tpspline;  
    model y = (x1 x2);  
run;
```

The `TPSPLINE` procedure can fit semiparametric models; the parentheses in the preceding `MODEL` statement separate the smoothing variables from the regression variables. The following statements illustrate this syntax:

```
proc tpspline;  
    model y = z1 (x1 x2);  
run;
```

This model assumes a linear relation with z_1 and an unknown functional relation with x_1 and x_2 .

If you want to fit several responses by using the same explanatory variables, you can save computation time by using the multiple responses feature in the `MODEL` statement. For example, if y_1 and y_2 are two response variables, the following `MODEL` statement can be used to fit two models. Separate analyses are then performed for each response variable.

```
proc tpspline;  
    model y1 y2 = (x1 x2);  
run;
```

The following example illustrates the use of PROC TPSPLINE. The data are from Bates et al. (1987).

```

data Measure;
  input x1 x2 y @@;
datalines;
-1.0 -1.0 15.54483570 -1.0 -1.0 15.76312613
-.5 -1.0 18.67397826 -.5 -1.0 18.49722167
.0 -1.0 19.66086310 .0 -1.0 19.80231311
.5 -1.0 18.59838649 .5 -1.0 18.51904737
1.0 -1.0 15.86842815 1.0 -1.0 16.03913832
-1.0 -.5 10.92383867 -1.0 -.5 11.14066546
-.5 -.5 14.81392847 -.5 -.5 14.82830425
.0 -.5 16.56449698 .0 -.5 16.44307297
.5 -.5 14.90792284 .5 -.5 15.05653924
1.0 -.5 10.91956264 1.0 -.5 10.94227538
-1.0 .0 9.61492010 -1.0 .0 9.64648093
-.5 .0 14.03133439 -.5 .0 14.03122345
.0 .0 15.77400253 .0 .0 16.00412514
.5 .0 13.99627680 .5 .0 14.02826553
1.0 .0 9.55700164 1.0 .0 9.58467047
-1.0 .5 11.20625177 -1.0 .5 11.08651907
-.5 .5 14.83723493 -.5 .5 14.99369172
.0 .5 16.55494349 .0 .5 16.51294369
.5 .5 14.98448603 .5 .5 14.71816070
1.0 .5 11.14575565 1.0 .5 11.17168689
-1.0 1.0 15.82595514 -1.0 1.0 15.96022497
-.5 1.0 18.64014953 -.5 1.0 18.56095997
.0 1.0 19.54375504 .0 1.0 19.80902641
.5 1.0 18.56884576 .5 1.0 18.61010439
1.0 1.0 15.86586951 1.0 1.0 15.90136745
;

```

The data set Measure contains three variables x_1 , x_2 , and y . Suppose that you want to fit a surface by using the variables x_1 and x_2 to model the response y . The variables x_1 and x_2 are spaced evenly on a $[-1 \times 1] \times [-1 \times 1]$ square, and the response y is generated by adding a random error to a function $f(x_1, x_2)$. The raw data are plotted in three-dimensional scatter plot by using the G3D procedure. In order to visualize those replicates, half of the data are shifted a little bit by adding a small value (0.001) to x_1 values, as in the following statements:

```

data Measure1;
  set Measure;
run;

proc sort data=Measure1;
  by x2 x1;
run;


data Measure1;
  set Measure1;
  if mod(_N_, 2) = 0 then x1=x1+0.001;
run;

proc g3d data=Measure1;
  scatter x2*x1=y /size=.5
          zmin=9 zmax=21
          zticknum=4;
  title "Raw Data";
run;

```

Figure 90.1 displays the raw data.

Figure 90.1 Plot of Data Set MEASURE

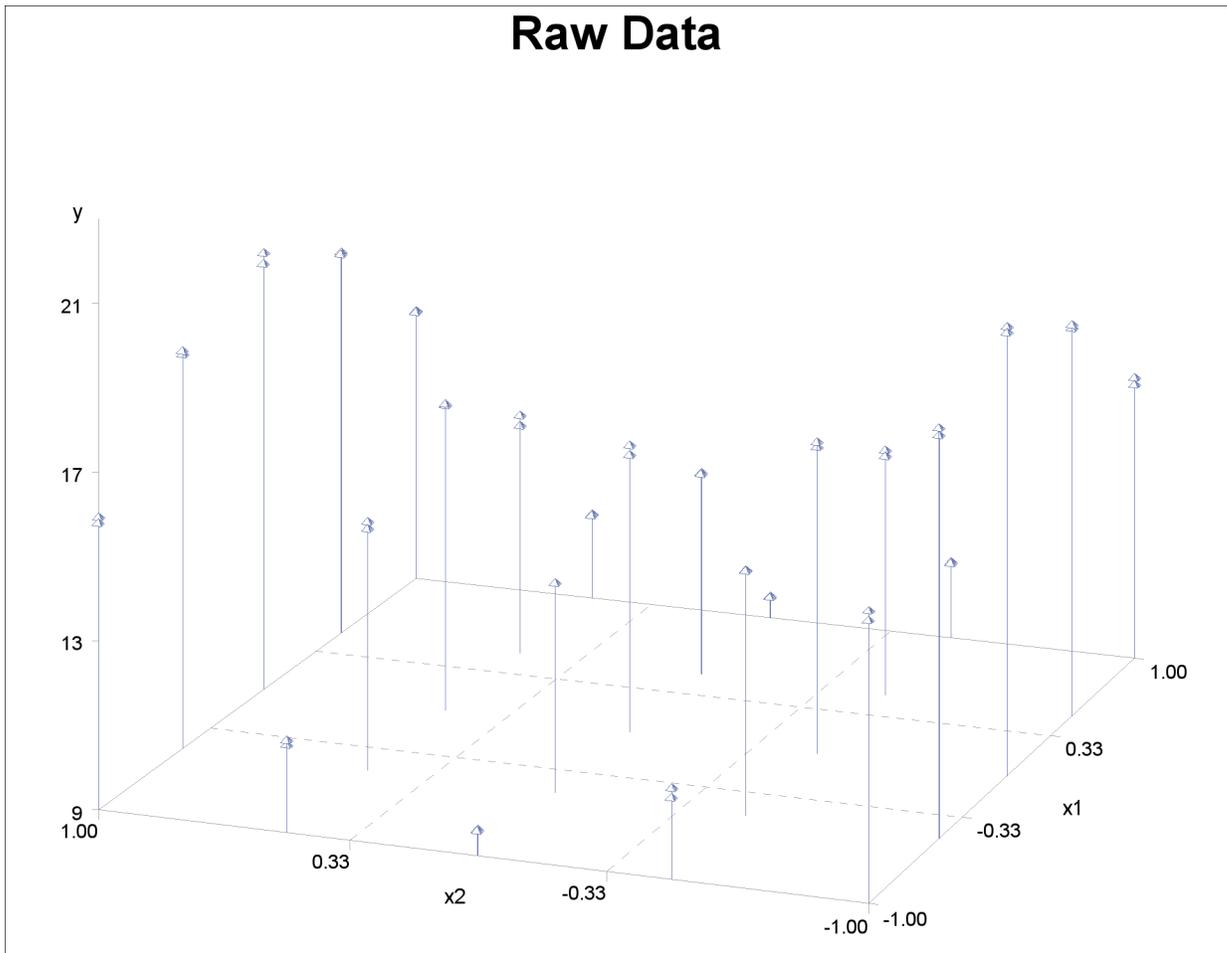

The following statements invoke the TPSPLINE procedure, by using the Measure data set as input. In the MODEL statement, the x1 and x2 variables are listed as smoothing variables. The LOGNLAMBDA= option specifies that PROC TPSPLINE examine a list of models with $\log_{10}(n\lambda)$ ranging from -4 to -2.5 . The OUTPUT statement creates the data set estimate to contain the predicted values and the 95% upper and lower confidence limits from the best model selected by the GCV criterion.

```
ods graphics on;
proc tpspline data=Measure;
  model y=(x1 x2) /lognlambda=(-4 to -2.5 by 0.1);
  output out=estimate pred uclm lclm;
run;

proc print data=estimate;
run;
```

When you enable graphics with an ODS GRAPHICS ON statement, PROC TPSPLINE produces several default plots. One of the default plots is the contour plot of the fitted surface, shown in Figure 90.2. The surface exhibits nonlinear patterns along the directions of both predictors.

Figure 90.2 Fitted Surface from PROC TPSPLINE

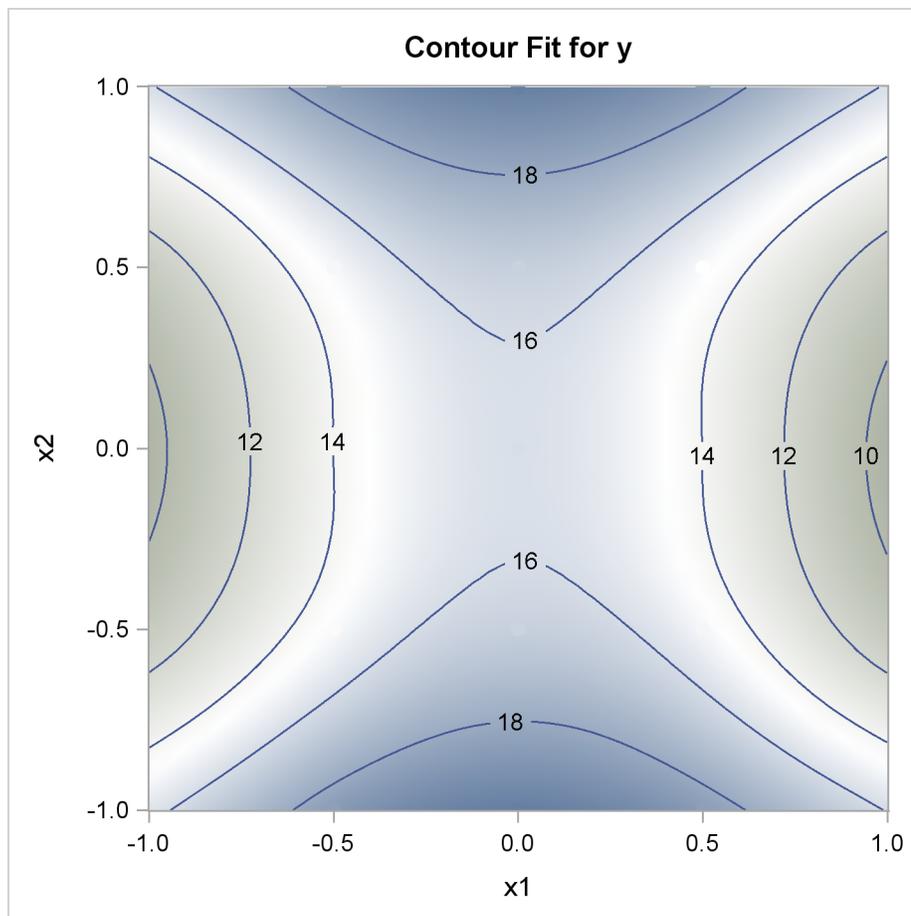


Figure 90.3 shows the “Criterion Plot” that provides a graphical display of the GCV selection process. Three sets of values are shown in the plot: the specified smoothing values and their GCV values, the examined smoothing values and their GCV values during the optimization process, and the best smoothing parameter and its GCV value. The final thin-plate smoothing spline estimate is based on $\log_{10}(n\lambda) = -3.4762$, which minimizes the GCV.

Figure 90.3 The GCV Criterion by $\log_{10}(n\lambda)$

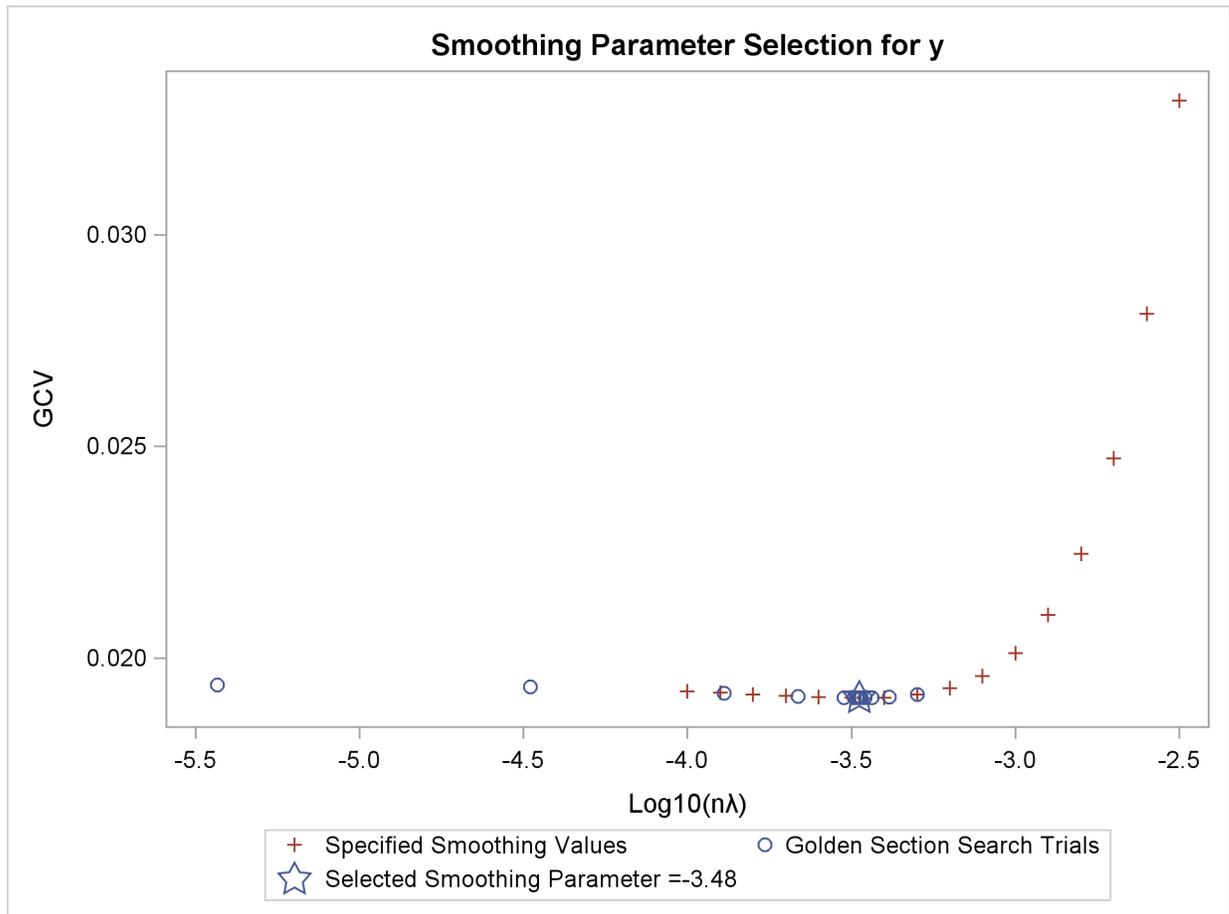


Figure 90.4 shows that the data set Measure contains 50 observations with 25 unique design points. The final model contains no parametric regression terms and two smoothing variables. The order derivative in the penalty is 2 by default, and the dimension of polynomial space is 3. See the section “Computational Formulas” on page 7564 for definitions.

Figure 90.4 also lists the GCV values along with the supplied values of $\log_{10}(n\lambda)$. The value that minimizes the GCV function is -3.5 among the given list of $\log_{10}(n\lambda)$.

The residual sum of squares from the fitted model is 0.246110, and the model degrees of freedom are 24.593203. The standard deviation, defined as $RS S / (\text{tr}(\mathbf{I} - \mathbf{A}))$, is 0.098421. The predictions and 95% confidence limits are displayed in Figure 90.5.

Figure 90.4 Fitted Model Summaries from PROC TPSPLINE

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: y	
Summary of Input Data Set	
Number of Non-Missing Observations	50
Number of Missing Observations	0
Unique Smoothing Design Points	25
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	2
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	3
GCV Function	
log10 (n*Lambda)	GCV
-4.000000	0.019215
-3.900000	0.019183
-3.800000	0.019148
-3.700000	0.019113
-3.600000	0.019082
-3.500000	0.019064*
-3.400000	0.019074
-3.300000	0.019135
-3.200000	0.019286
-3.100000	0.019584
-3.000000	0.020117
-2.900000	0.021015
-2.800000	0.022462
-2.700000	0.024718
-2.600000	0.028132
-2.500000	0.033165
Note: * indicates minimum GCV value.	
Summary Statistics of Final Estimation	
log10 (n*Lambda)	-3.4762
Smoothing Penalty	2558.1432
Residual SS	0.2461
Tr (I-A)	25.4068
Model DF	24.5932
Standard Deviation	0.0984
GCV	0.0191

Figure 90.5 Data Set ESTIMATE

Raw Data						
Obs	x1	x2	y	P_y	LCLM_y	UCLM_y
1	-1.0	-1.0	15.5448	15.6474	15.5115	15.7832
2	-1.0	-1.0	15.7631	15.6474	15.5115	15.7832
3	-0.5	-1.0	18.6740	18.5783	18.4430	18.7136
4	-0.5	-1.0	18.4972	18.5783	18.4430	18.7136
5	0.0	-1.0	19.6609	19.7270	19.5917	19.8622
6	0.0	-1.0	19.8023	19.7270	19.5917	19.8622
7	0.5	-1.0	18.5984	18.5552	18.4199	18.6905
8	0.5	-1.0	18.5190	18.5552	18.4199	18.6905
9	1.0	-1.0	15.8684	15.9436	15.8077	16.0794
10	1.0	-1.0	16.0391	15.9436	15.8077	16.0794
11	-1.0	-0.5	10.9238	11.0467	10.9114	11.1820
12	-1.0	-0.5	11.1407	11.0467	10.9114	11.1820
13	-0.5	-0.5	14.8139	14.8246	14.6896	14.9597
14	-0.5	-0.5	14.8283	14.8246	14.6896	14.9597
15	0.0	-0.5	16.5645	16.5102	16.3752	16.6452
16	0.0	-0.5	16.4431	16.5102	16.3752	16.6452
17	0.5	-0.5	14.9079	14.9812	14.8461	15.1162
18	0.5	-0.5	15.0565	14.9812	14.8461	15.1162
19	1.0	-0.5	10.9196	10.9497	10.8144	11.0850
20	1.0	-0.5	10.9423	10.9497	10.8144	11.0850
21	-1.0	0.0	9.6149	9.6372	9.5019	9.7724
22	-1.0	0.0	9.6465	9.6372	9.5019	9.7724
23	-0.5	0.0	14.0313	14.0188	13.8838	14.1538
24	-0.5	0.0	14.0312	14.0188	13.8838	14.1538
25	0.0	0.0	15.7740	15.8822	15.7472	16.0171
26	0.0	0.0	16.0041	15.8822	15.7472	16.0171
27	0.5	0.0	13.9963	14.0006	13.8656	14.1356
28	0.5	0.0	14.0283	14.0006	13.8656	14.1356
29	1.0	0.0	9.5570	9.5769	9.4417	9.7122
30	1.0	0.0	9.5847	9.5769	9.4417	9.7122
31	-1.0	0.5	11.2063	11.1614	11.0261	11.2967
32	-1.0	0.5	11.0865	11.1614	11.0261	11.2967
33	-0.5	0.5	14.8372	14.9182	14.7831	15.0532
34	-0.5	0.5	14.9937	14.9182	14.7831	15.0532
35	0.0	0.5	16.5549	16.5386	16.4036	16.6736
36	0.0	0.5	16.5129	16.5386	16.4036	16.6736
37	0.5	0.5	14.9845	14.8549	14.7199	14.9900
38	0.5	0.5	14.7182	14.8549	14.7199	14.9900
39	1.0	0.5	11.1458	11.1727	11.0374	11.3080
40	1.0	0.5	11.1717	11.1727	11.0374	11.3080
41	-1.0	1.0	15.8260	15.8851	15.7493	16.0210
42	-1.0	1.0	15.9602	15.8851	15.7493	16.0210
43	-0.5	1.0	18.6401	18.5946	18.4593	18.7299
44	-0.5	1.0	18.5610	18.5946	18.4593	18.7299
45	0.0	1.0	19.5438	19.6729	19.5376	19.8081
46	0.0	1.0	19.8090	19.6729	19.5376	19.8081
47	0.5	1.0	18.5688	18.5832	18.4478	18.7185
48	0.5	1.0	18.6101	18.5832	18.4478	18.7185
49	1.0	1.0	15.8659	15.8761	15.7402	16.0120
50	1.0	1.0	15.9014	15.8761	15.7402	16.0120

You can also use the `TEMPLATE` and `SGRENDER` procedures to create a perspective plot for visualizing the fitted surface. Because the data in the data set `Measure` are very sparse, the fitted surface is not smooth. To produce a smoother surface, the following statements generate the data set `pred` in order to obtain a finer grid. The `LOGNLAMBDA0=` option requests that `PROC TPSPLINE` fit a model with a fixed $\log_{10}(n\lambda)$ value of -3.4762 . The `SCORE` statement evaluates the fitted surface at those new design points.

```

data pred;
  do x1=-1 to 1 by 0.1;
    do x2=-1 to 1 by 0.1;
      output;
    end;
  end;
run;

proc tpspline data=measure;
  model y=(x1 x2)/lognlambda0=-3.4762;
  score data=pred out=predy;
run;

proc template;
  define statgraph surface;
    dynamic _X _Y _Z _T;
    beginngraph /designheight=360;
      entrytitle _T;
      layout overlay3d/rotate=120 cube=false xaxisopts=(label="x1")
        yaxisopts=(label="x2") zaxisopts=(label="P_y");
      surfaceplotparm x=_X y=_Y z=_Z;
    endlayout;
  endngraph;
end;
run;

proc sgrender data=predy template=surface;
  dynamic _X='x1' _Y='x2' _Z='P_y'
    _T='Plot of Fitted Surface on a Fine Grid';
run;

```

The surface plot based on the finer grid is displayed in Figure 90.6. The plot indicates that a parametric model with quadratic terms of x_1 and x_2 provides a reasonable fit to the data.

Figure 90.6 Plot of TPSPLINE Fit


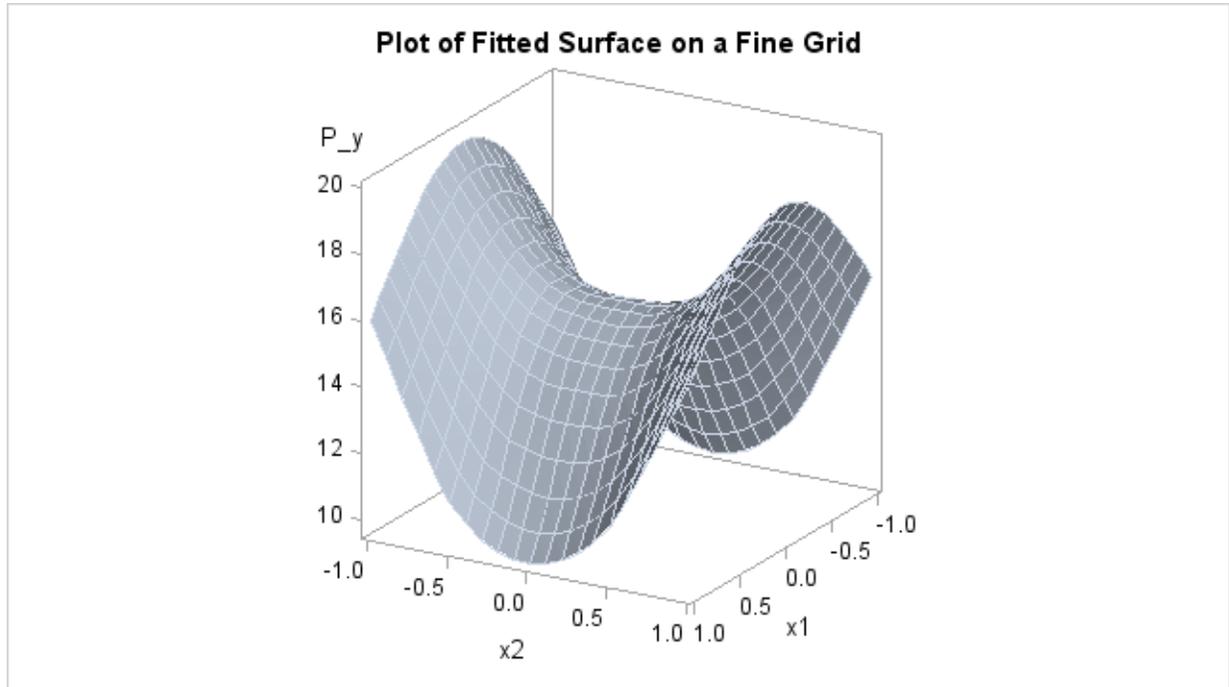


Figure 90.7 shows a panel of fit diagnostics for the selected model that indicate a reasonable fit:

- The predicted values closely approximate the observed values.
- The residuals are approximately normally distributed and do not show obvious systematic patterns.
- The **RFPLOT** shows that much variation in the response variable is addressed by the fit and only a little remains in the residuals.

Figure 90.7 Fit Diagnostics

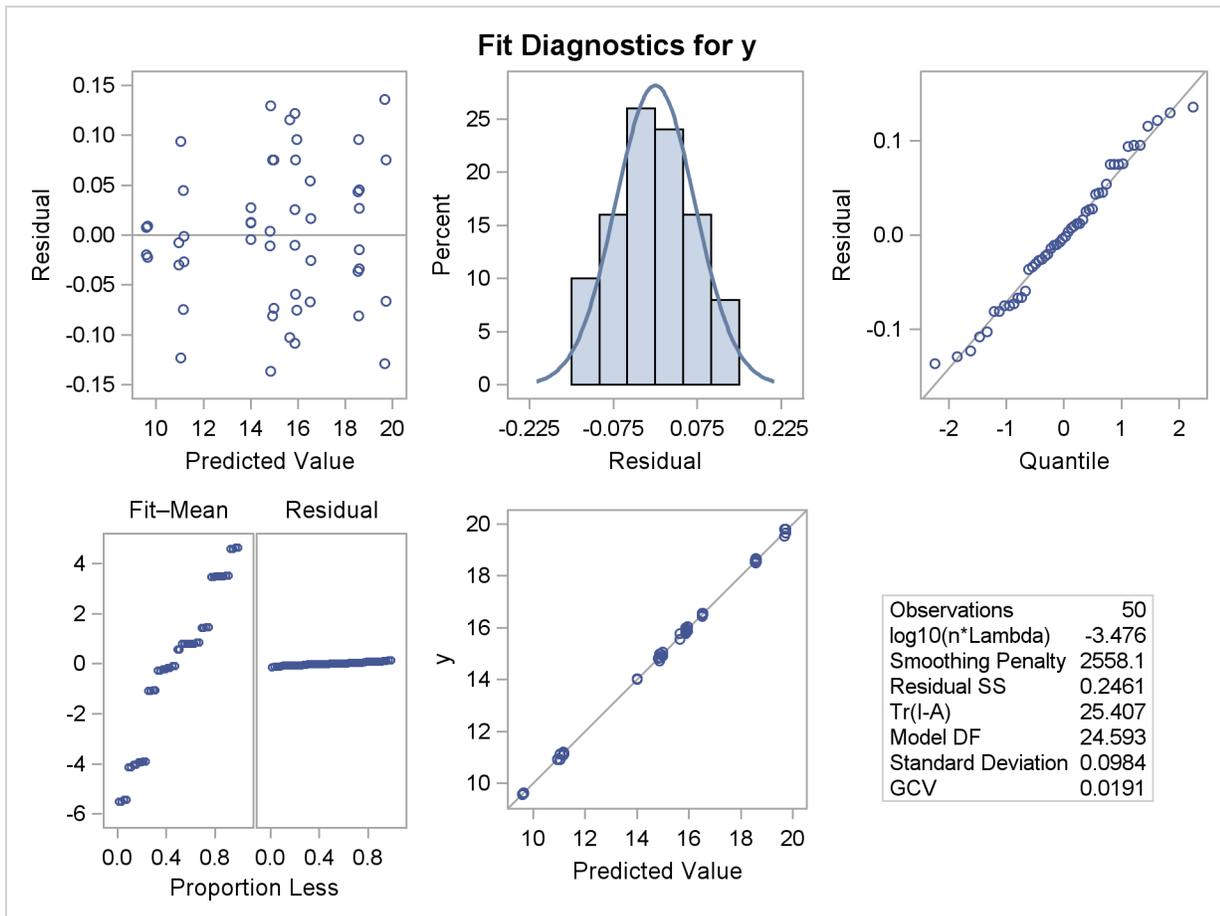

Syntax: TPSPLINE Procedure

The following statements are available in PROC TPSPLINE:

```

PROC TPSPLINE < options > ;
  MODEL dependents = < variables > (variables) < /options > ;
  SCORE data=SAS-data-set out=SAS-data-set < keyword ... keyword > ;
  OUTPUT < out=SAS-data-set > keyword ... keyword ;
  BY variables ;
  FREQ variable ;
  ID variables ;

```

The syntax in PROC TPSPLINE is similar to that of other regression procedures in the SAS System. The PROC TPSPLINE and MODEL statements are required. The SCORE statement can appear multiple times; all other statements appear only once.

The statements available for PROC TPSPLINE are described in alphabetical order after the description of the PROC TPSPLINE statement.

PROC TPSPLINE Statement

PROC TPSPLINE < options > ;

The PROC TPSPLINE statement invokes the procedure. You can specify the following options:

DATA=SAS-data-set

specifies the SAS data set to be read by PROC TPSPLINE. The default value is the most recently created data set.

PLOTS < (global-plot-options) > < = plot-request < (options) > >

PLOTS < (global-plot-options) > < = (plot-request < (options) > < ... plot-request < (options) > >) >

controls the plots that are produced through ODS Graphics. When you specify only one plot request, you can omit the parentheses around the plot request. Here are some examples:

```
plots=none
plots=residuals(smooth)
plots(unpack)=diagnostics
plots(only)=(fit residualHistogram)
```

You must enable ODS Graphics before requesting plots as shown in the following example. For general information about ODS Graphics, see Chapter 21, “Statistical Graphics Using ODS.”

```
ods graphics on;

proc tpspline;
  model y = (x);
run;

proc tpspline plots=all;
  model y = (x);
run;

ods graphics off;
```

The first PROC TPSPLINE step does not specify the PLOTS= option, so the default plots (which consist of a criterion plot, a panel of fit diagnostics, a fit plot, and a plot of residuals by x) are produced. The PLOTS=ALL option in the second PROC TPSPLINE step produces the default plots together with individual plots of the plots in the panel of fit diagnostics.

If you have enabled ODS Graphics but do not specify the PLOTS= option, then PROC TPSPLINE produces a default set of plots. The following table lists the default set of plots that are produced.

Table 90.1 Default ODS Graphics Produced

Plot	Conditional on:
ContourFitPanel	LAMBDA= or LOGNLAMBDA= option specified in the MODEL statement
ContourFit	Model with two predictors
CriterionPlot	Multiple values for the smoothing parameter
DiagnosticsPanel	Unconditional
ResidualBySmooth	LAMBDA= or LOGNLAMBDA= option specified in the MODEL statement
ResidualPanel	Unconditional
FitPanel	LAMBDA= or LOGNLAMBDA= option specified in the MODEL statement
FitPlot	Model with one predictor
ScorePlot	One or more SCORE statements and a model with one predictor

For models with multiple dependent variables, separate plots are produced for each dependent variable. For models in which multiple smoothing parameters are specified with the LAMBDA= or LOGNLAMBDA= option in the MODEL statement, the plots are produced for the selected model only.

Global Plot Options

The *global-plot-options* apply to all relevant plots generated by the TPSPLINE procedure, unless they are overridden by a *specific-plot-option*. The following *global-plot-options* are supported by the TPSPLINE procedure:

ONLY

suppresses the default plots. Only the plots specifically requested are produced.

UNPACK

suppresses paneling. By default, multiple plots can appear in some output panels. Specify UNPACK to get each plot individually. You can specify PLOTS(UNPACK) to unpack the default plots. You can also specify UNPACK as a suboption with the CONTOURFITPANEL, DIAGNOSTICS, FITPANEL, RESIDUALS and RESIDUALSBYSMOOTH options.

Plot Requests

You can specify the following *specific-plot-requests* and controls for them:

ALL

produces all plots appropriate for the particular analysis. You can specify other options with ALL; for example, to request that all plots be produced and that only the residual plots be unpacked, specify PLOTS=(ALL RESIDUALS(UNPACK)).

CONTOURFIT <(OBS=*contour-options*)>

produces a contour plot of the fitted surface overlaid with a scatter plot of the data for models with two predictors. You can use the following *contour-options* to control how the observations are displayed:

GRADIENT

displays observations as circles colored by the observed response. The same color gradient is used to display the fitted surface and the observations. Observations where the predicted response is close to the observed response have similar colors—the greater the contrast between the color of an observation and the surface, the larger the residual is at that point. OBS=GRADIENT is the default if you do not specify any *contour-options*.

NONE

suppresses the observations.

OUTLINE

displays observations as circles with a border but with a completely transparent fill.

OUTLINEGRADIENT

is the same as OBS=GRADIENT except that a border is shown around each observation. This option is useful for identifying the location of observations where the residuals are small, because at these points the color of the observations and the color of the surface are indistinguishable.

CONTOURFITPANEL <(options)>

produces panels of contour plots overlaid with a scatter plot of the data for each smoothing parameter specified in the LAMBDA= or LOGNLAMBDA= option in the MODEL statement, for models with two predictors. If you do not specify the LAMBDA= or LOGNLAMBDA= option or if the model does not have two predictors, then this plot is not produced. Each panel contains at most six plots, and multiple panels are used when there are more than six smoothing parameters in the LAMBDA= or LOGNLAMBDA= option. The following *options* are available:

OBS=contour-options

specifies how the observations are displayed. See *contour-options* for the CONTOURFIT option for details.

UNPACK

suppresses paneling.

CRITERIONPLOT | CRITERION <(NOPATH)>

displays a scatter plot of the value of the GCV criterion versus the smoothing parameter value for all smoothing parameter values examined in the selection process. This plot is not produced when you specify one smoothing parameter with either the LAMBDA0= or LOGNLAMBDA0= option in the MODEL statement. When you supply a list of values for the smoothing parameter with the LAMBDA= or LOGNLAMBDA= option and PROC TPSPLINE obtains the optimal smoothing parameter by minimizing the GCV

criterion, then the plot contains the supplied list of smoothing values and the optimal smoothing parameter in addition to the values examined during the optimization process. You can use the NOPATH suboption to disable the display of the optimization path in the plot in this case.

DIAGNOSTICSPANEL | DIAGNOSTICS <(UNPACK)>

produces a summary panel of fit diagnostics that consists of the following:

- residuals versus the predicted values
- a histogram of the residuals
- a normal quantile plot of the residuals
- a “Residual-Fit” (RF) plot that consists of side-by-side quantile plots of the centered fit and the residuals
- response values versus the predicted values

You can request the five plots in this panel as individual plots by specifying the UNPACK option. You can also request individual plots in the panel by name without having to unpack the panel. The fit diagnostics panel is produced by default whenever ODS Graphics is enabled.

FITPANEL <(options)>

produces panels of plots that show the fitted TPSPLINE curve overlaid on a scatter plot of the input data for each smoothing parameter specified in the **LAMBDA=** or **LOGNLAMBDA=** option in the MODEL statement. If you do not specify the **LAMBDA=** or **LOGNLAMBDA=** option or the model has more than one predictor, then this plot is not produced. Each panel contains at most six plots, and multiple panels are used when there are more than six smoothing parameters in the **LAMBDA=** or **LOGNLAMBDA=** option. The following *options* are available:

CLM

includes a confidence band at the significance level specified in the **ALPHA=** option in the MODEL statement in each plot in the panels.

UNPACK

suppresses paneling.

FITPLOT | FIT <(CLM)>

produces a scatter plot of the input data with the fitted TPSPLINE curve overlaid for models with a single predictor. If the CLM option is specified, then a confidence band at the significance level specified in the **ALPHA=** option in the MODEL statement is included in the plot.

NONE

suppresses all plots.

OBSERVEDBYPREDICTED

produces a scatter plot of the dependent variable values by the predicted values.

QQPLOT | QQ

produces a normal quantile plot of the residuals.

RESIDUALBYSMOOTH <(SMOOTH)>

produces, for each predictor, panels of plots that show the residuals of the TPSPLINE fit versus the predictor for each smoothing parameter specified in the **LAMBDA=** or **LOGNLAMBDA=** option in the MODEL statement. If you do not specify the **LAMBDA=** or **LOGNLAMBDA=** option, then this plot is not produced. Each panel contains at most six plots, and multiple panels are used when there are more than six smoothing parameters in the **LAMBDA=** or **LOGNLAMBDA=** option in the MODEL statement. The **SMOOTH** option displays a nonparametric fit line to be shown in each plot in the panel. The type of nonparametric fit and the options used are controlled by the underlying template for this plot. In the standard template that is provided, the nonparametric smooth is specified to be a loess fit that corresponds to the default options of PROC LOESS, except that the **PRESEARCH** suboption in the **SELECT** statement is always used. It is important to note that the loess fit that is shown in each of the residual plots is computed independently of the smoothing spline fit that is used to obtain the residuals.

RESIDUALBYPREDICTED

produces a scatter plot of the residuals by the predicted values.

RESIDUALHISTOGRAM

produces a histogram of the residuals.

RESIDUALPANEL | RESIDUALS <(options)>

produces panels of the residuals versus the predictors in the model. Each panel contains at most six plots, and multiple panels are used when there are more than six predictors in the model.

The following *options* are available:

SMOOTH

requests that a nonparametric fit line be shown in each plot in the panel. The type of nonparametric fit and the options used are controlled by the underlying template for this plot. In the standard template that is provided, the nonparametric smooth is specified to be a loess fit that corresponds to the default options of PROC LOESS, except that the **PRESEARCH** suboption in the **SELECT** statement is always used. It is important to note that the loess fit that is shown in each of the residual plots is computed independently of the smoothing spline fit that is used to obtain the residuals.

UNPACK

suppresses paneling.

RFPLOT | RF

produces a “Residual-Fit” (RF) plot that consists of side-by-side quantile plots of the centered fit and the residuals. This plot “shows how much variation in the data is explained by the fit and how much remains in the residuals” (Cleveland 1993).

SCOREPLOT | SCORE

produces a scatter plot of the scored values at the score points for each **SCORE** statement. **SCORE** plots are not produced for models with more than one predictor.

BY Statement

BY variables ;

You can specify a BY statement with PROC TPSPLINE to obtain separate analyses on observations in groups that are defined by the BY variables. When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables. If you specify more than one BY statement, only the last one specified is used.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the NOTSORTED or DESCENDING option in the BY statement for the TPSPLINE procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables by using the DATASETS procedure (in Base SAS software).

For more information about BY-group processing, see the discussion in *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

FREQ Statement

FREQ variable ;

If one variable in your input data set represents the frequency of occurrence for other values in the observation, specify the variable's name in a FREQ statement. PROC TPSPLINE treats the data as if each observation appears n times, where n is the value of the FREQ variable for the observation. If the value of the FREQ variable is less than one, the observation is not used in the analysis. Only the integer portion of the value is used.

ID Statement

ID variables ;

The variables in the ID statement are copied from the input data set to the OUT= data set. If you omit the ID statement, only the variables used in the MODEL statement and requested statistics are included in the output data set.

MODEL Statement

MODEL *dependent-variables* = < *regression-variables* > (*smoothing-variables*) < /*options* > ;

The MODEL statement specifies the dependent variables, the independent regression variables, which are listed with no parentheses, and the independent smoothing variables, which are listed inside parentheses.

The regression variables are optional. At least one smoothing variable is required, and it must be listed after the regression variables. No variables can be listed in both the regression variable list and the smoothing variable list.

If you specify more than one dependent variable, PROC TPSPLINE calculates a thin-plate smoothing spline estimate for each dependent variable by using the regression variables and smoothing variables specified on the right side.

If you specify regression variables, PROC TPSPLINE fits a semiparametric model by using the regression variables as the linear part of the model.

You can specify the following options in the MODEL statement:

ALPHA=*number*

specifies the significance level α of the confidence limits on the final thin-plate smoothing spline estimate when you request confidence limits to be included in the output data set. Specify *number* as a value between 0 and 1. The default value is 0.05. See the section “OUTPUT Statement” on page 7563 for more information about the OUTPUT statement.

DF=*number*

specifies the degrees of freedom of the thin-plate smoothing spline estimate, defined as

$$df = \text{tr}(\mathbf{A}(\lambda))$$

where $\mathbf{A}(\lambda)$ is the *hat* matrix. Specify *number* as a value between zero and the number of unique design points n_q . Smaller df values cause more penalty on the roughness and thus smoother fits.

DISTANCE=*number*

D=*number*

defines a range such that if the L_∞ distance between two data points $(\mathbf{x}_i, \mathbf{z}_i)$ and $(\mathbf{x}_j, \mathbf{z}_j)$ satisfies

$$\|\mathbf{x}_i - \mathbf{x}_j\|_\infty \leq D/2$$

then these data points are treated as replicates, where \mathbf{x}_i are the smoothing variables and \mathbf{z}_i are the regression variables.

You can use the DISTANCE= option to reduce the number of unique design points by treating nearby data as replicates. This can be useful when you have a large data set. Larger DISTANCE= option values cause fewer n_q points. The default value is 0.

PROC TPSPLINE uses the DISTANCE= value to group points as follows: The data are first sorted by the smoothing variables in the order in which they appear in the MODEL statement. The first point in the sorted data becomes the first unique point. Subsequent points have their values set equal to that point until the first point where the maximum distance in one dimension is larger than $D/2$. This point becomes the next unique point, and so on. Because of this sequential processing, the set of unique points differs depending on the order of the smoothing variables in the MODEL statement.

For example, with a model that has two smoothing variables (x_1, x_2), the data are first sorted by x_1 and x_2 (in that order), and then uniqueness is assessed sequentially. The first point in the sorted data $\mathbf{x}_1 = (x_{11}, x_{21})$ becomes the first unique point, $\mathbf{u}_1 = (u_{11}, u_{21})$. Subsequent points $\mathbf{x}_i = (x_{1i}, x_{2i})$ are set equal to \mathbf{u}_1 until the algorithm comes to a point with $\max(|x_{1i} - u_{11}|, |x_{2i} - u_{21}|) > D/2$. This point becomes the second unique point \mathbf{u}_2 , and data sorting proceeds from there.

LAMBDA0=number

specifies the smoothing parameter, λ_0 , to be used in the thin-plate smoothing spline estimate. By default, PROC TPSPLINE uses the λ parameter that minimizes the GCV function for the final fit. The LAMBDA0= value must be positive. Larger λ_0 values cause smoother fits.

LAMBDA=list-of-values

specifies a set of values for the λ parameter. PROC TPSPLINE returns a GCV value for each λ point that you specify. You can use the LAMBDA= option to study the GCV function curve for a set of values for λ . All values listed in the LAMBDA= option must be positive.

LOGNLAMBDA0=number

LOGNL0=number

specifies the smoothing parameter λ_0 on the $\log_{10}(n\lambda)$ scale. If you specify both the LOGNL0= and LAMBDA0= options, only the value provided by the LOGNL0= option is used. Larger $\log_{10}(n\lambda_0)$ values cause smoother fits. By default, PROC TPSPLINE uses the λ parameter that minimizes the GCV function for the estimate.

LOGNLAMBDA=list-of-values

LOGNL=list-of-values

specifies a set of values for the λ parameter on the $\log_{10}(n\lambda)$ scale. PROC TPSPLINE returns a GCV value for each λ point that you specify. You can use the LOGNLAMBDA= option to study the GCV function curve for a set of λ values. If you specify both the LOGNL= and LAMBDA= options, only the list of values provided by the LOGNL= option is used.

In some cases, the LOGNL= option might be preferred over the LAMBDA= option. Because the LAMBDA= value must be positive, a small change in that value can result in a major change in the GCV value. If you instead specify λ on the $\log_{10}(n\lambda)$ scale, the allowable range is enlarged to include negative values. Thus, the GCV function is less sensitive to changes in LOGNLAMBDA.

The DF= option, LAMBDA0= option, and LOGNLAMBDA0= option all specify exact smoothness of a nonparametric fit. If you want to fit a model with specified smoothness, the DF= option is preferable to the other two options because $(0, n_q)$, the range of df, is much smaller in length than $(0, \infty)$ of λ and $(-\infty, \infty)$ of $\log_{10}(n\lambda)$.

M=number

specifies the order of the derivative in the penalty term. The *number* must be a positive integer. The default value is $\max(2, \text{int}(d/2) + 1)$, where d is the number of smoothing variables.

RANGE=(lower, upper)

specifies that on the $\log_{10}(n\lambda)$ scale only smoothing values greater than or equal to *lower* and less than or equal to *upper* be evaluated to minimize the GCV function.

SCORE Statement

SCORE *DATA=SAS-data-set OUT=SAS-data-set < keyword ... keyword >* ;

The SCORE statement calculates predicted statistics for a new data set. If you have multiple data sets to predict, you can specify multiple SCORE statements. You must use a SCORE statement for each data set.

You can request diagnostic measures that are calculated for each observation in the SCORE data set. The new data set contains all the variables in the SCORE data set in addition to the requested variables. If no *keyword* is present, the data set contains only the predicted values.

The following keywords must be specified in the SCORE statement:

DATA=SAS-data-set

specifies the input SAS data set that contains the smoothing variables **x** and regression variables **z**. The predicted response (\hat{y}) value is computed for each (**x**, **z**) pair. The data set must include all independent variables specified in the MODEL statement.

OUT=SAS-data-set

specifies the name of the SAS data set to contain the predictions.

keyword

specifies the statistics to include in the output data set for the current SCORE statement. The names of the new variables that contain the statistics are formed by using a prefix of one or more characters to identify the statistic, followed by an underscore (_), followed by the dependent variable name. The keywords and the statistics they represent are as follows:

PRED	predicted values
STD	standard error of the mean predicted value
UCLM	upper limit of the Bayesian confidence interval for the expected value of the dependent variables. By default, PROC TPSPLINE computes 95% confidence limits.
LCLM	lower limit of the Bayesian confidence interval for the expected value of the dependent variables. By default, PROC TPSPLINE computes 95% confidence limits.

OUTPUT Statement

OUTPUT *OUT=SAS-data-set* < *keyword* ··· *keyword* > ;

The OUTPUT statement creates a new SAS data set that contains diagnostic measures calculated after fitting the model.

You can request a variety of diagnostic measures that are calculated for each observation in the data set. The new data set contains the variables specified in the MODEL statement in addition to the requested variables. If no *keyword* is present, the data set contains only the predicted values.

Details about the specifications in the OUTPUT statement are as follows.

OUT=SAS-data-set

specifies the name of the new data set to contain the diagnostic measures. This specification is required.

keyword

specifies the statistics to include in the output data set. The names of the new variables that contain the statistics are formed by using a prefix of one or more characters to identify the statistic, followed by an underscore (_), followed by the dependent variable name.

For example, suppose that you have two dependent variables—say, *y1* and *y2*—and you specify the keywords PRED, ADIAG, and UCLM. The output SAS data set will contain the following variables:

- P_y1 and P_y2
- ADIAG_y1 and ADIAG_y2
- UCLM_y1 and UCLM_y2

The keywords and the statistics they represent are as follows:

RESID R	residual values, calculated as fitted values subtracted from the observed response values: $y - \hat{y}$
PRED	predicted values
STD	standard error of the mean predicted value
UCLM	upper limit of the Bayesian confidence interval for the expected value of the dependent variables. By default, PROC TPSPLINE computes 95% confidence limits.
LCLM	lower limit of the Bayesian confidence interval for the expected value of the dependent variables. By default, PROC TPSPLINE computes 95% confidence limits.
ADIAG	diagonal element of the hat matrix associated with the observation
COEF	coefficients arranged in the order of $(\theta_0, \theta_1, \dots, \theta_d, \delta_1, \dots, \delta_{n_q})$, where n_q is the number of unique data points. This option can be used only when there is only one dependent variable in the model.

Details: TPSPLINE Procedure

Computational Formulas

The theoretical foundations for the thin-plate smoothing spline are described in Duchon (1976, 1977) and Meinguet (1979). Further results and applications are given in Wahba and Wendelberger (1980), Hutchinson and Bischof (1983), and Seaman and Hutchinson (1985).

Suppose that \mathcal{H}_m is a space of functions whose partial derivatives of total order m are in $L_2(E^d)$, where E^d is the domain of \mathbf{x} .

Now, consider the data model

$$y_i = f(\mathbf{x}_i) + \epsilon_i, i = 1, \dots, n$$

where $f \in \mathcal{H}_m$.

Using the notation from the section “Penalized Least Squares Estimation” on page 7542, for a fixed λ , estimate f by minimizing the penalized least squares function

$$\frac{1}{n} \sum_{i=1}^n (y_i - f(\mathbf{x}_i) - \mathbf{z}_i \boldsymbol{\beta})^2 + \lambda J_m(f)$$

$\lambda J_m(f)$ is the penalty term to enforce smoothness on f . There are several ways to define $J_m(f)$. For the thin-plate smoothing spline, with $\mathbf{x} = (x_1, \dots, x_d)$ of dimension d , define $J_m(f)$ as

$$J_m(f) = \int_{-\infty}^{\infty} \cdots \int_{-\infty}^{\infty} \sum \frac{m!}{\alpha_1! \cdots \alpha_d!} \left(\frac{\partial^m f}{\partial x_1^{\alpha_1} \cdots \partial x_d^{\alpha_d}} \right)^2 dx_1 \cdots dx_d$$

where $\sum_i \alpha_i = m$. Under this definition, $J_m(f)$ gives zero penalty to some functions. The space that is spanned by the set of polynomials that contribute zero penalty is called the polynomial space. The dimension of the polynomial space M is a function of dimension d and order m of the smoothing penalty, $M = \binom{m+d-1}{d}$.

Given the condition that $2m > d$, the function that minimizes the penalized least squares criterion has the form

$$\hat{f}(\mathbf{x}) = \sum_{j=1}^M \theta_j \phi_j(\mathbf{x}) + \sum_{i=1}^n \delta_i \eta_{md}(\|\mathbf{x} - \mathbf{x}_i\|)$$

where $\boldsymbol{\theta}$ and $\boldsymbol{\delta}$ are vectors of coefficients to be estimated. The M functions ϕ_j are linearly independent polynomials that span the space of functions for which $J_m(f)$ is zero. The basis functions η_{md} are defined as

$$\eta_{md}(r) = \begin{cases} \frac{(-1)^{m+1+d/2}}{2^{2m-1} \pi^{d/2} (m-1)! (m-d/2)!} r^{2m-d} \log(r) & \text{if } d \text{ is even} \\ \frac{\Gamma(d/2-m)}{2^{2m} \pi^{d/2} (m-1)!} r^{2m-d} & \text{if } d \text{ is odd} \end{cases}$$

When $d = 2$ and $m = 2$, then $M = \binom{3}{2} = 3$, $\phi_1(\mathbf{x}) = 1$, $\phi_2(\mathbf{x}) = x_1$, and $\phi_3(\mathbf{x}) = x_2$. $J_m(f)$ is as follows:

$$J_2(f) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \left(\left(\frac{\partial^2 f}{\partial x_1^2} \right)^2 + 2 \left(\frac{\partial^2 f}{\partial x_1 \partial x_2} \right)^2 + \left(\frac{\partial^2 f}{\partial x_2^2} \right)^2 \right) dx_1 dx_2$$

For the sake of simplicity, the formulas and equations that follow assume $m = 2$. See Wahba (1990) and Bates et al. (1987) for more details.

Duchon (1976) showed that f_λ can be represented as

$$f_\lambda(\mathbf{x}_i) = \theta_0 + \sum_{j=1}^d \theta_j \mathbf{x}_{ij} + \sum_{j=1}^n \delta_j E_2(\mathbf{x}_i - \mathbf{x}_j)$$

where $E_2(\mathbf{s}) = \frac{1}{2^3 \pi} \|\mathbf{s}\|^2 \log(\|\mathbf{s}\|)$ for $d = 2$. For derivations of $E_2(\mathbf{s})$ for other values of d , see Villalobos and Wahba (1987).

If you define \mathbf{K} with elements $\mathbf{K}_{ij} = E_2(\mathbf{x}_i - \mathbf{x}_j)$ and \mathbf{T} with elements $\mathbf{T}_{ij} = (\mathbf{X}_{ij})$, the goal is to find vectors of coefficients $\boldsymbol{\beta}$, $\boldsymbol{\theta}$, and $\boldsymbol{\delta}$ that minimize

$$S_\lambda(\boldsymbol{\beta}, \boldsymbol{\theta}, \boldsymbol{\delta}) = \frac{1}{n} \|\mathbf{y} - \mathbf{T}\boldsymbol{\theta} - \mathbf{K}\boldsymbol{\delta} - \mathbf{Z}\boldsymbol{\beta}\|^2 + \lambda \boldsymbol{\delta}^T \mathbf{K} \boldsymbol{\delta}$$

A unique solution is guaranteed if the matrix \mathbf{T} is of full rank and $\boldsymbol{\delta}^T \mathbf{K} \boldsymbol{\delta} \geq 0$.

If $\boldsymbol{\alpha} = \begin{pmatrix} \boldsymbol{\theta} \\ \boldsymbol{\beta} \end{pmatrix}$ and $\mathbf{X} = (\mathbf{T} \mathbf{Z})$, the expression for S_λ becomes

$$\frac{1}{n} \|\mathbf{y} - \mathbf{X}\boldsymbol{\alpha} - \mathbf{K}\boldsymbol{\delta}\|^2 + \lambda \boldsymbol{\delta}^T \mathbf{K} \boldsymbol{\delta}$$

The coefficients $\boldsymbol{\alpha}$ and $\boldsymbol{\delta}$ can be obtained by solving

$$\begin{aligned} (\mathbf{K} + n\lambda \mathbf{I}_n) \boldsymbol{\delta} + \mathbf{X}\boldsymbol{\alpha} &= \mathbf{y} \\ \mathbf{X}^T \boldsymbol{\delta} &= \mathbf{0} \end{aligned}$$

To compute $\boldsymbol{\alpha}$ and $\boldsymbol{\delta}$, let the QR decomposition of \mathbf{X} be

$$\mathbf{X} = (\mathbf{Q}_1 \mathbf{Q}_2) \begin{pmatrix} \mathbf{R} \\ \mathbf{0} \end{pmatrix}$$

where $(\mathbf{Q}_1 \mathbf{Q}_2)$ is an orthogonal matrix and \mathbf{R} is an upper triangular, with $\mathbf{X}^T \mathbf{Q}_2 = \mathbf{0}$ (Dongarra et al. 1979).

Since $\mathbf{X}^T \boldsymbol{\delta} = \mathbf{0}$, $\boldsymbol{\delta}$ must be in the column space of \mathbf{Q}_2 . Therefore, $\boldsymbol{\delta}$ can be expressed as $\boldsymbol{\delta} = \mathbf{Q}_2 \boldsymbol{\gamma}$ for a vector $\boldsymbol{\gamma}$. Substituting $\boldsymbol{\delta} = \mathbf{Q}_2 \boldsymbol{\gamma}$ into the preceding equation and multiplying through by \mathbf{Q}_2^T gives

$$\mathbf{Q}_2^T (\mathbf{K} + n\lambda \mathbf{I}) \mathbf{Q}_2 \boldsymbol{\gamma} = \mathbf{Q}_2^T \mathbf{y}$$

or

$$\delta = \mathbf{Q}_2 \boldsymbol{\gamma} = \mathbf{Q}_2 [\mathbf{Q}_2^T (\mathbf{K} + n\lambda \mathbf{I}) \mathbf{Q}_2]^{-1} \mathbf{Q}_2^T \mathbf{y}$$

The coefficient $\boldsymbol{\alpha}$ can be obtained by solving

$$\mathbf{R}\boldsymbol{\alpha} = \mathbf{Q}_1^T [\mathbf{y} - (\mathbf{K} + n\lambda \mathbf{I})\delta]$$

The influence matrix $\mathbf{A}(\lambda)$ is defined as

$$\hat{\mathbf{y}} = \mathbf{A}(\lambda)\mathbf{y}$$

and has the form

$$\mathbf{A}(\lambda) = \mathbf{I} - n\lambda \mathbf{Q}_2 [\mathbf{Q}_2^T (\mathbf{K} + n\lambda \mathbf{I}) \mathbf{Q}_2]^{-1} \mathbf{Q}_2^T$$

Similar to the regression case, if you consider the trace of $\mathbf{A}(\lambda)$ as the degrees of freedom for the model and the trace of $(\mathbf{I} - \mathbf{A}(\lambda))$ as the degrees of freedom for the error, the estimate σ^2 can be represented as

$$\hat{\sigma}^2 = \frac{RSS(\lambda)}{\text{tr}(\mathbf{I} - \mathbf{A}(\lambda))}$$

where $RSS(\lambda)$ is the residual sum of squares. Theoretical properties of these estimates have not yet been published. However, good numerical results in simulation studies have been described by several authors. For more information, see O'Sullivan and Wong (1987), Nychka (1986a, 1986b, 1988), and Hall and Titterton (1987).

Confidence Intervals

Viewing the spline model as a Bayesian model, Wahba (1983) proposed Bayesian confidence intervals for smoothing spline estimates as

$$\hat{f}_\lambda(\mathbf{x}_i) \pm z_{\alpha/2} \sqrt{\hat{\sigma}^2 a_{ii}(\lambda)}$$

where $a_{ii}(\lambda)$ is the i th diagonal element of the $\mathbf{A}(\lambda)$ matrix and $z_{\alpha/2}$ is the $1 - \alpha/2$ quantile of the standard normal distribution. The confidence intervals are interpreted as intervals “across the function” as opposed to pointwise intervals.

For SCORE data sets, the hat matrix $\mathbf{A}(\lambda)$ is not available. To compute the Bayesian confidence interval for a new point \mathbf{x}_{new} , let

$$\mathbf{S} = \mathbf{X}, \mathbf{M} = \mathbf{K} + n\lambda \mathbf{I}$$

and let $\boldsymbol{\xi}$ be an $n \times 1$ vector with i th entry

$$\eta_{md}(\|\mathbf{x}_{\text{new}} - \mathbf{x}_i\|)$$

When $d = 2$ and $m = 2$, ξ_i is computed with

$$E_2(\mathbf{x}_i - \mathbf{x}_{\text{new}}) = \frac{1}{2^3 \pi} \|\mathbf{x}_i - \mathbf{x}_{\text{new}}\|^2 \log(\|\mathbf{x}_i - \mathbf{x}_{\text{new}}\|)$$

ϕ is a vector of evaluations of \mathbf{x}_{new} by the polynomials that span the functional space where $J_m(f)$ is zero. The details for \mathbf{X} , \mathbf{K} , and E_2 are discussed in the previous section. Wahba (1983) showed that the Bayesian posterior variance of \mathbf{x}_{new} satisfies

$$n\lambda \text{Var}(\mathbf{x}_{\text{new}}) = \phi^T (\mathbf{S}^T \mathbf{M}^{-1} \mathbf{S})^{-1} \phi - 2\phi^T \mathbf{d}_\xi - \xi^T \mathbf{c}_\xi$$

where

$$\begin{aligned} \mathbf{c}_\xi &= (\mathbf{M}^{-1} - \mathbf{M}^{-1} \mathbf{S} (\mathbf{S}^T \mathbf{M}^{-1} \mathbf{S})^{-1} \mathbf{S}^T \mathbf{M}^{-1}) \xi \\ \mathbf{d}_\xi &= (\mathbf{S}^T \mathbf{M}^{-1} \mathbf{S})^{-1} \mathbf{S}^T \mathbf{M}^{-1} \xi \end{aligned}$$

Suppose that you fit a spline estimate that consists of a true function f and a random error term ϵ_i to experimental data. In repeated experiments, it is likely that about $100(1 - \alpha)\%$ of the confidence intervals cover the corresponding true values, although some values are covered every time and other values are not covered by the confidence intervals most of the time. This effect is more pronounced when the true surface or surface has small regions of particularly rapid change.

Smoothing Parameter

The quantity λ is called the smoothing parameter, which controls the balance between the goodness of fit and the smoothness of the final estimate.

A large λ heavily penalizes the m th derivative of the function, thus forcing $f^{(m)}$ close to 0. A small λ places less of a penalty on rapid change in $f^{(m)}(\mathbf{x})$, resulting in an estimate that tends to interpolate the data points.

The smoothing parameter greatly affects the analysis, and it should be selected with care. One method is to perform several analyses with different values for λ and compare the resulting final estimates.

A more objective way to select the smoothing parameter λ is to use the “leave-out-one” cross validation function, which is an approximation of the predicted mean squares error. A generalized version of the leave-out-one cross validation function is proposed by Wahba (1990) and is easy to calculate. This generalized cross validation (GCV) function is defined as

$$GCV(\lambda) = \frac{(1/n) \|(\mathbf{I} - \mathbf{A}(\lambda))\mathbf{y}\|^2}{[(1/n) \text{tr}(\mathbf{I} - \mathbf{A}(\lambda))]^2}$$

The justification for using the GCV function to select λ relies on asymptotic theory. Thus, you cannot expect good results for very small sample sizes or when there is not enough information in the data to separate the model from the error component. Simulation studies suggest that for independent and identically distributed Gaussian noise, you can obtain reliable estimates of λ for n greater than 25 or

30. Note that, even for large values of n (say, $n \geq 50$), in extreme Monte Carlo simulations there might be a small percentage of unwarranted extreme estimates in which $\hat{\lambda} = 0$ or $\hat{\lambda} = \infty$ (Wahba 1983). Generally, if σ^2 is known to within an order of magnitude, the occasional extreme case can be readily identified. As n gets larger, the effect becomes weaker.

The GCV function is fairly robust against nonhomogeneity of variances and non-Gaussian errors (Villalobos and Wahba 1987). Andrews (1988) has provided favorable theoretical results when variances are unequal. However, this selection method is likely to give unsatisfactory results when the errors are highly correlated.

The GCV value might be suspect when λ is extremely small because computed values might become indistinguishable from zero. In practice, calculations with $\lambda = 0$ or λ near 0 can cause numerical instabilities that result in an unsatisfactory solution. Simulation studies have shown that a λ with $\log_{10}(n\lambda) > -8$ is small enough that the final estimate based on this λ almost interpolates the data points. A GCV value based on a $\lambda \leq 10^{-8}$ might not be accurate.

ODS Table Names

PROC TPSPLINE assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. Table 90.2 lists these names. For more information about ODS, see Chapter 20, “Using the Output Delivery System.”

Table 90.2 ODS Tables Produced by PROC TPSPLINE

ODS Table Name	Description	Statement	Option
DataSummary	Data summary	PROC	Default
FitSummary	Fit parameters and fit summary	PROC	Default
FitStatistics	Model fit statistics	PROC	Default
GCVFunction	GCV table	MODEL	LOGNLAMBDA, LAMBDA

By referring to the names of such tables, you can use the ODS OUTPUT statement to place one or more of these tables in output data sets.

For example, the following statements create an output data set named FitStats which contains the FitStatistics table, an output data set named DataInfo which contains the DataSummary table, an output data set named ModelInfo which contains the FitSummary table, and an output data set named GCVFunc which contains the GCVFunction table.

```
proc tpspline data=Melanoma;
  model Incidences=Year /LOGNLAMBDA=(-4 to 0 by 0.2);
  ods output FitStatistics = FitStats
             DataSummary   = DataInfo
             FitSummary     = ModelInfo
             GCVFunction    = GCVFunc;
run;
```

ODS Graphics

To request graphics with PROC TPSPLINE, you must first enable ODS Graphics by specifying the ODS GRAPHICS ON statement. See Chapter 21, “Statistical Graphics Using ODS,” for more information. You can reference every graph produced through ODS Graphics with a name. Table 90.3 lists the names of the graphs, along with the relevant PLOTS= options.

Table 90.3 ODS Graphics Produced by PROC TPSPLINE

ODS Graph Name	Plot Description	PLOTS Option
ContourFitPanel	Panel of thin-plate spline contour surfaces overlaid on scatter plots of data	CONTOURFITPANEL
ContourFit	Thin-plate spline contour surface overlaid on scatter plot of data	CONTOURFITPANEL
DiagnosticsPanel	Panel of fit diagnostics	DIAGNOSTICS
FitPanel	Panel of thin-plate spline curves overlaid on scatter plots of data	FITPANEL
FitPlot	Thin-plate spline curve overlaid on scatter plot of data	FIT
ObservedByPredicted	Dependent variable versus thin-plate spline fit	OBSERVEDBYPREDICTED
QQPlot	Normal quantile plot of residuals	QQPLOT
ResidualBySmooth	Panel of residuals versus predictor by smoothing parameter values	RESIDUALBYSMOOTH
ResidualByPredicted	Residuals versus thin-plate spline fit	RESIDUALBYPREDICTED
ResidualHistogram	Histogram of fit residuals	RESIDUALHISTOGRAM
ResidualPanel	Panel of residuals versus predictors for fixed smoothing parameter value	RESIDUALS
ResidualPlot	Plot of residuals versus predictor	RESIDUALS
RFPlot	Side-by-side plots of quantiles of centered fit and residuals	RFPLOT
ScorePlot	Thin-plate spline fit evaluated at scoring points	SCOREPLOT
CriterionPlot	GCV criterion versus smoothing parameter	CRITERION

Examples: TPSPLINE Procedure

Example 90.1: Partial Spline Model Fit

This example analyzes the data set Measure that was introduced in the section “Getting Started: TPSPLINE Procedure” on page 7544. That analysis determined that the final estimated surface can be represented by a quadratic function for one or both of the independent variables. This example illustrates how you can use PROC TPSPLINE to fit a partial spline model. The data set Measure is fit by using the following model:

$$y = \beta_0 + \beta_1 x_1 + \beta x_1^2 + f(x_2)$$

The model has a parametric component (associated with the x_1 variable) and a nonparametric component (associated with the x_2 variable). The following statements fit a partial spline model:

```
data Measure;
  set Measure;
  x1sq = x1*x1;
run;

data pred;
  do x1=-1 to 1 by 0.1;
    do x2=-1 to 1 by 0.1;
      x1sq = x1*x1;
      output;
    end;
  end;
run;

proc tpspline data= measure;
  model y = x1 x1sq (x2);
  score data = pred out = predy;
run;
```

Output 90.1.1 displays the results from these statements.

Output 90.1.1 Output from PROC TPSPLINE

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: y	
Summary of Input Data Set	
Number of Non-Missing Observations	50
Number of Missing Observations	0
Unique Smoothing Design Points	5
Summary of Final Model	
Number of Regression Variables	2
Number of Smoothing Variables	1
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	4
Summary Statistics of Final Estimation	
log10(n*Lambda)	-2.2374
Smoothing Penalty	205.3461
Residual SS	8.5821
Tr(I-A)	43.1534
Model DF	6.8466
Standard Deviation	0.4460
GCV	0.2304

As displayed in [Output 90.1.1](#), there are five unique design points for the smoothing variable x_2 and two regression variables in the model (x_1, x_1^2) . The dimension of the polynomial space is $\text{sizeof}(\{1, x_1, x_1^2, x_2\}) = 4$. The standard deviation of the estimate is much larger than the one based on the model with both x_1 and x_2 as smoothing variables (0.445954 compared to 0.098421). One of the many possible explanations might be that the number of unique design points of the smoothing variable is too small to warrant an accurate estimate for $f(x_2)$.


The following statements produce a surface plot for the partial spline model by using the surface template that is defined in the section “[Getting Started: TPSPLINE Procedure](#)” on page 7544.

```
ods graphics on;

proc sgrender data=predy template=surface;
  dynamic _X='x1' _Y='x2' _Z='P_y' _T='Plot of Fitted Surface on a Fine Grid';
run;

ods graphics off;
```

The surface displayed in [Output 90.1.2](#) is similar to the one estimated by using the full nonparametric model (displayed in [Output 90.2](#) and [Output 90.6](#)).

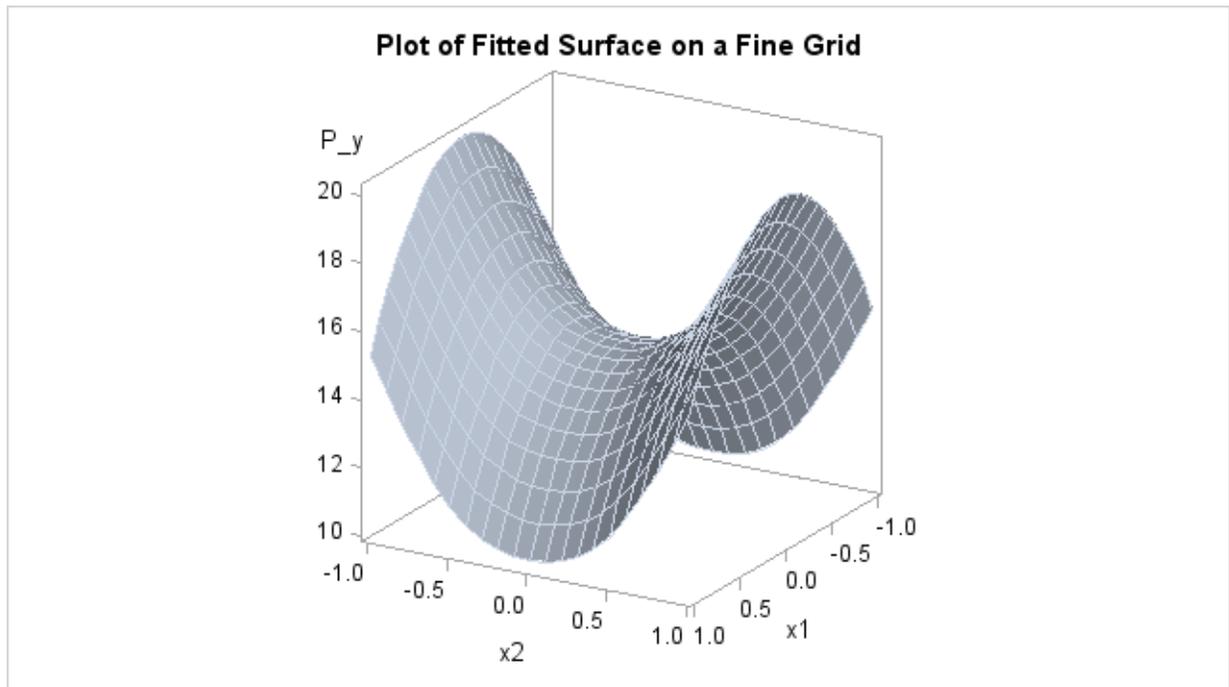Output 90.1.2 Plot of PROC TPSPLINE Fit from the Partial Spline Model

Example 90.2: Spline Model with Higher-Order Penalty

This example continues the analysis of the data set Measure to illustrate how you can use PROC TPSPLINE to fit a spline model with a higher-order penalty term. Spline models with high-order penalty terms move low-order polynomial terms into the polynomial space. Hence, there is no penalty for these terms, and they can vary without constraint.

As shown in the previous analyses, the final model for the data set Measure must include quadratic terms for both x_1 and x_2 . This example fits the following model:

$$y = \beta_0 + \beta_1 x_1 + \beta_2 x_1^2 + \beta_3 x_2 + \beta_4 x_2^2 + \beta_5 x_1 x_2 + f(x_1, x_2)$$

The model includes quadratic terms for both variables, although it differs from the usual linear model. The nonparametric term $f(x_1, x_2)$ explains the variation of the data that is unaccounted for by a simple quadratic surface.

To modify the order of the derivative in the penalty term, specify the **M=** option. The following statements specify the option **M=3** in order to include the quadratic terms in the polynomial space:

```
data Measure;
  set Measure;
  x1sq = x1*x1;
  x2sq = x2*x2;
  x1x2 = x1*x2;
;
```

```
proc tpspline data= Measure;
  model y = (x1 x2) / m=3;
  score data = pred out = predy;
run;
```

Output 90.2.1 displays the results from these statements.

Output 90.2.1 Output from PROC TPSPLINE with M=3

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: y	
Summary of Input Data Set	
Number of Non-Missing Observations	50
Number of Missing Observations	0
Unique Smoothing Design Points	25
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	2
Order of Derivative in the Penalty	3
Dimension of Polynomial Space	6
Summary Statistics of Final Estimation	
log10(n*Lambda)	-3.7831
Smoothing Penalty	2092.4495
Residual SS	0.2731
Tr (I-A)	29.1716
Model DF	20.8284
Standard Deviation	0.0968
GCV	0.0160

The model contains six terms in the polynomial space ($\text{sizeof}(\{1, x_1, x_1^2, x_1x_2, x_2, x_2^2\}) = 6$). Compare [Output 90.2.1](#) with [Output 90.1.1](#): the $\log_{10}(n\lambda)$ value and the smoothing penalty differ significantly. In general, these terms are not directly comparable for different models. The final estimate based on this model is close to the estimate based on the model by using the default, M=2.

In the following statements, the REG procedure fits a quadratic surface model to the data set Measure:

```
proc reg data= Measure;
  model y = x1 x1sq x2 x2sq x1x2;
run;
```

The results are displayed in [Output 90.2.2](#).

Output 90.2.2 Quadratic Surface Model: The REG Procedure

Raw Data					
The REG Procedure					
Model: MODEL1					
Dependent Variable: y					
Analysis of Variance					
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	5	443.20502	88.64100	436.33	<.0001
Error	44	8.93874	0.20315		
Corrected Total	49	452.14376			
	Root MSE	0.45073	R-Square	0.9802	
	Dependent Mean	15.08548	Adj R-Sq	0.9780	
	Coeff Var	2.98781			
Parameter Estimates					
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t
Intercept	1	14.90834	0.12519	119.09	<.0001
x1	1	0.01292	0.09015	0.14	0.8867
x1sq	1	-4.85194	0.15237	-31.84	<.0001
x2	1	0.02618	0.09015	0.29	0.7729
x2sq	1	5.20624	0.15237	34.17	<.0001
x1x2	1	-0.04814	0.12748	-0.38	0.7076

The REG procedure produces slightly different results. To fit a similar model with PROC TPSPLINE, you can use a MODEL statement that specifies the degrees of freedom with the DF= option. You can also use a large value for the LOGNLAMBDA= option to force a parametric model fit.

Because there is one degree of freedom for each of the terms intercept, x1, x2, x1sq, x2sq, and x1x2, the DF=6 option is used as follows:

```
proc tpspline data=measure;
  model y=(x1 x2) /m=3 df=6 lognlambd=(-4 to 1 by 0.5);
  score data = pred
        out = predy;
run;
```

The fit statistics are displayed in [Output 90.2.3](#).

Output 90.2.3 Output from PROC TPSPLINE Using M=3 and DF=6

```

Raw Data

The TPSPLINE Procedure
Dependent Variable: y

Summary of Final Model

Number of Regression Variables      0
Number of Smoothing Variables      2
Order of Derivative in the Penalty  3
Dimension of Polynomial Space       6

GCV Function


log10(n*Lambda)      GCV
-4.000000            0.016330*
-3.500000            0.016889
-3.000000            0.027496
-2.500000            0.067672
-2.000000            0.139642
-1.500000            0.195727
-1.000000            0.219512
-0.500000            0.227306
0                    0.229740
0.500000            0.230504
1.000000            0.230745

Note: * indicates minimum GCV value.

Summary Statistics
of Final Estimation

log10(n*Lambda)      2.3830
Smoothing Penalty    0.0000
Residual SS          8.9384
Tr(I-A)              43.9997
Model DF             6.0003
Standard Deviation   0.4507
GCV                  0.2309
    
```

[Output 90.2.4](#) shows the GCV values for the list of supplied $\log_{10}(n\lambda)$ values in addition to the fitted model with fixed degrees of freedom 6. The fitted model has a larger GCV value than all other examined models.

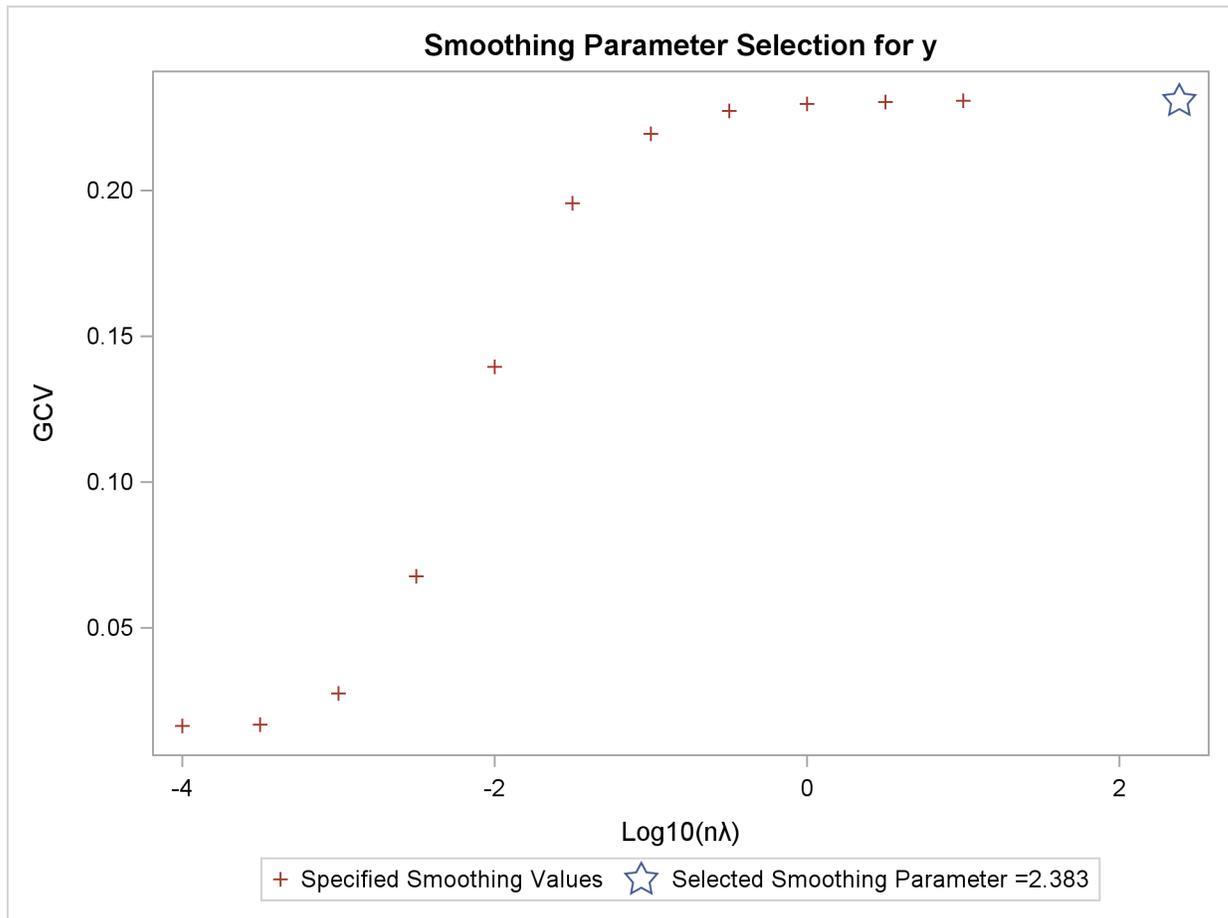Output 90.2.4 Criterion Plot

The final estimate is based on 6.000330 degrees of freedom because there are already 6 degrees of freedom in the polynomial space and the search range for λ is not large enough (in this case, setting DF=6 is equivalent to setting $\lambda = \infty$).

The standard deviation and RSS ([Output 90.2.3](#)) are close to the sum of squares for the error term and the root MSE from the linear regression model ([Output 90.2.2](#)), respectively.

For this model, the optimal $\log_{10}(n\lambda)$ is around -3.8 , which produces a standard deviation estimate of 0.096765 (see [Output 90.2.1](#)) and a GCV value of 0.016051, while the model that specifies DF=6 results in a $\log_{10}(n\lambda)$ larger than 1 and a GCV value larger than 0.23074. The nonparametric model, based on the GCV, should provide better prediction, but the linear regression model can be more easily interpreted.

Example 90.3: Multiple Minima of the GCV Function

The data in this example represent the deposition of sulfate (SO₄) at 179 sites in the 48 contiguous states of the United States in 1990. Each observation records the latitude and longitude of the site in addition to the SO₄ deposition at the site measured in grams per square meter (g/m^2).

You can use PROC TPSPLINE to fit a surface that reflects the general trend and that reveals underlying features of the data, which are shown in the following DATA step:

```
data so4;
input latitude longitude so4 @@;
datalines;
32.45833 87.24222 1.403 34.28778 85.96889 2.103
33.07139 109.86472 0.299 36.07167 112.15500 0.304
31.95056 112.80000 0.263 33.60500 92.09722 1.950

... more lines ...

43.87333 104.19222 0.306 44.91722 110.42028 0.210
45.07611 72.67556 2.646
;
data pred;
do latitude = 25 to 47 by 1;
do longitude = 68 to 124 by 1;
output;
end;
end;
run;
```

The preceding statements create the SAS data set so4 and the data set pred in order to make predictions on a regular grid. The following statements fit a surface for SO₄ deposition. The ODS OUTPUT statement creates a data set called GCV to contain the GCV values for $\log_{10}(n\lambda)$ in the range from -6 to 1.

```
ods graphics on;
proc tpspline data=so4 plots(only)=criterion;
model so4 = (latitude longitude) /lognlambda=(-6 to 1 by 0.1);
score data=pred out=prediction1;
run;
```

Partial output from these statements is displayed in [Output 90.3.1](#) and [Output 90.3.2](#).

Output 90.3.1 Partial Output from PROC TPSPLINE for Data Set SO₄

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: so4	
Summary of Input Data Set	
Number of Non-Missing Observations	179
Number of Missing Observations	0
Unique Smoothing Design Points	179


Output 90.3.1 *continued*

Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	2
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	3

Output 90.3.2 Partial Output from PROC TPSPLINE for Data Set SO₄

Summary Statistics of Final Estimation	
log10(n*Lambda)	0.2770
Smoothing Penalty	2.4588
Residual SS	12.4450
Tr(I-A)	140.2750
Model DF	38.7250
Standard Deviation	0.2979
GCV	0.1132

Output 90.3.3 displays the “CriterionPlot” of the GCV function versus $\log_{10}(n\lambda)$.

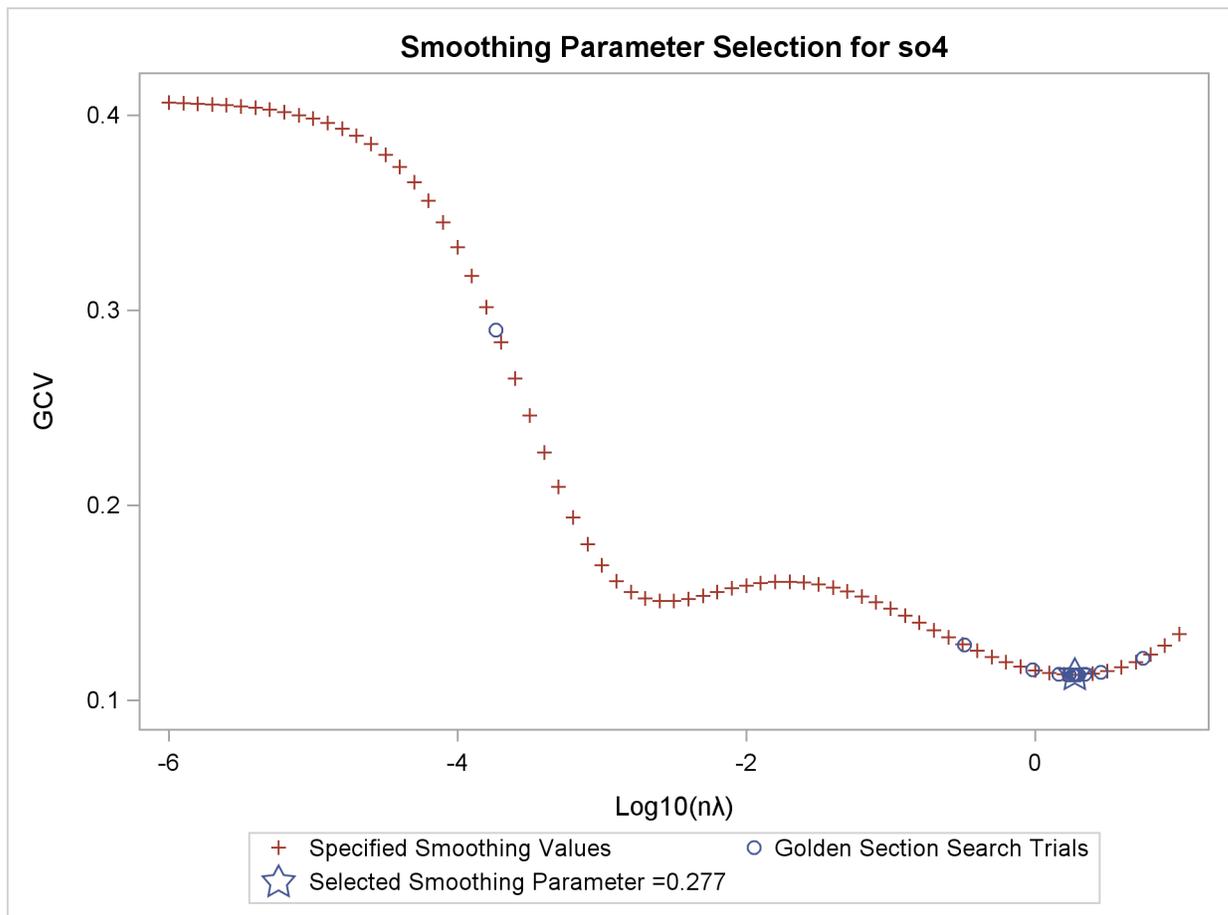Output 90.3.3 GCV Function of SO₄ Data Set

The GCV function has two minima. PROC TPSPLINE locates the global minimum at 0.277005. The plot also displays a local minimum located around -2.56 . The TPSPLINE procedure might not always find the global minimum, although it did in this case. If there is a predetermined search range based on prior knowledge, you can use the `RANGE=` option to narrow the search range in order to find a desired smoothing value. For example, if you believe a better smoothing parameter should be within the $(-4, -2)$ range, you can obtain the model with $\log_{10}(n\lambda) = -2.56$ with the following statements.

```
proc tpspline data=so4;
  model so4 = (latitude longitude) / range=(-4,-2);
  score data=pred out=prediction2;
run;
```

Output 90.3.4 displays the output from PROC TPSPLINE with a specified search range from the smoothing parameter.

Output 90.3.4 Output from PROC TPSPLINE for Data Set SO₄ with $\log_{10}(n\lambda) = -2.56$

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: so4	
Summary of Input Data Set	
Number of Non-Missing Observations	179
Number of Missing Observations	0
Unique Smoothing Design Points	179
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	2
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	3
Summary Statistics of Final Estimation	
log10(n*Lambda)	-2.5600
Smoothing Penalty	177.2160
Residual SS	0.0438
Tr(I-A)	7.2083
Model DF	171.7917
Standard Deviation	0.0779
GCV	0.1508

The smoothing penalty in Output 90.3.4 is much larger than that displayed in Output 90.3.2. The estimate in Output 90.3.2 uses a large λ value; therefore, the surface is smoother than the estimate by using $\log_{10}(n\lambda) = -2.56$ (Output 90.3.4).

The estimate based on $\log_{10}(n\lambda) = -2.56$ has a larger value of degrees of freedom, and it has a much smaller standard deviation.


However, a smaller standard deviation in nonparametric regression does not necessarily mean that the estimate is good: a small λ value always produces an estimate closer to the data and, therefore, a smaller standard deviation.

With the ODS GRAPHICS option enabled, you can compare the two fits by supplying 0.277 and -2.56 to the LOGNLAMBDA= option:

```
proc tpspline data=so4;
  model so4 = (latitude longitude) / lognlambda=(0.277 -2.56);
run;
```


Output 90.3.5 shows the contour surfaces of two models with the two minima. The fit that corresponds to the global minimum 0.277 shows a smoother fit that captures the general structure in the data set. The fit at the local minimum -2.56 is a rougher fit that captures local details. The response values are also displayed as circles with the same color gradient by the default GRADIENT contour-option. The contrast between the predicted and observed SO_4 deposition is greater for the smoother fit than for the other one, which means the smoother fit has larger absolute residual values.

Output 90.3.5 Panel of Contour Fit Plots by 0.277 and -2.56

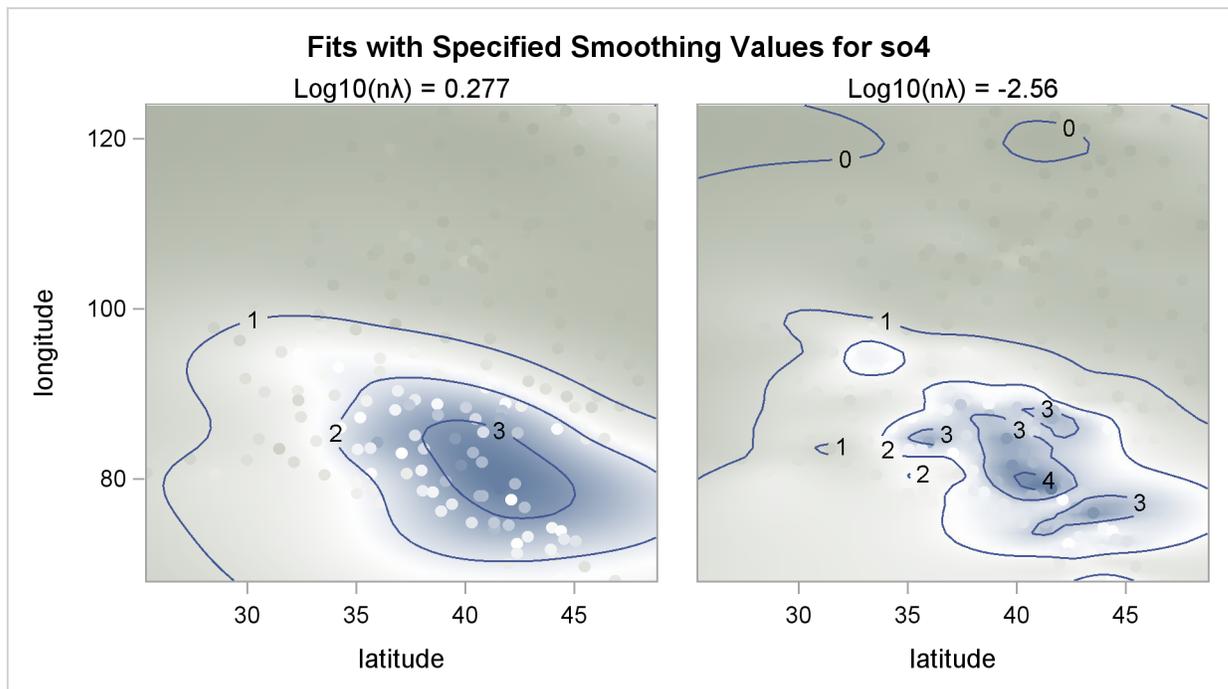


The residuals for the two fits can be visualized in RESIDUALBYSMOOTH panels. Output 90.3.6 is a panel of plots of residuals against smoothing variable Latitude. Output 90.3.7 is a panel of plots of residuals against smoothing variable Longitude. Both panels show that the residuals from the model with the global minimum are larger in absolute values than the ones from the local minimum. This is expected, since the optimal model achieves the smallest GCV value by significantly increasing the smoothness of fit and sacrificing a little in the goodness of fit.

Output 90.3.6 Panel of Residuals by Latitude Plots

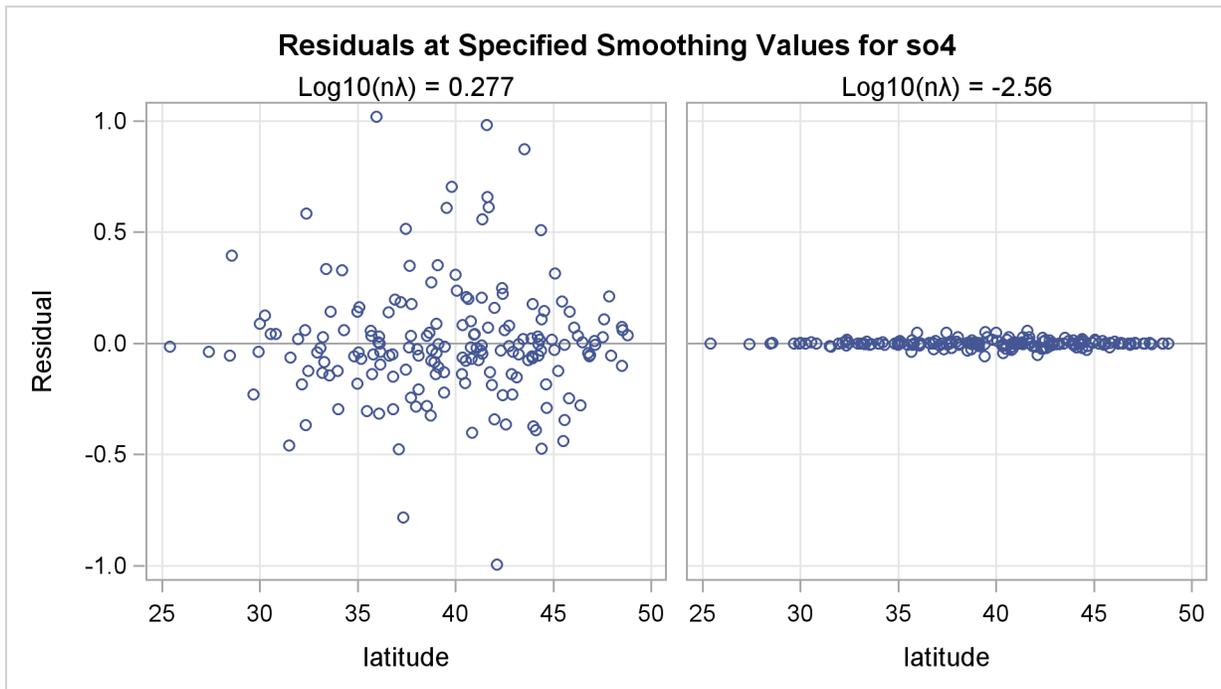

Output 90.3.7 Panel of Residuals by Longitude Plots

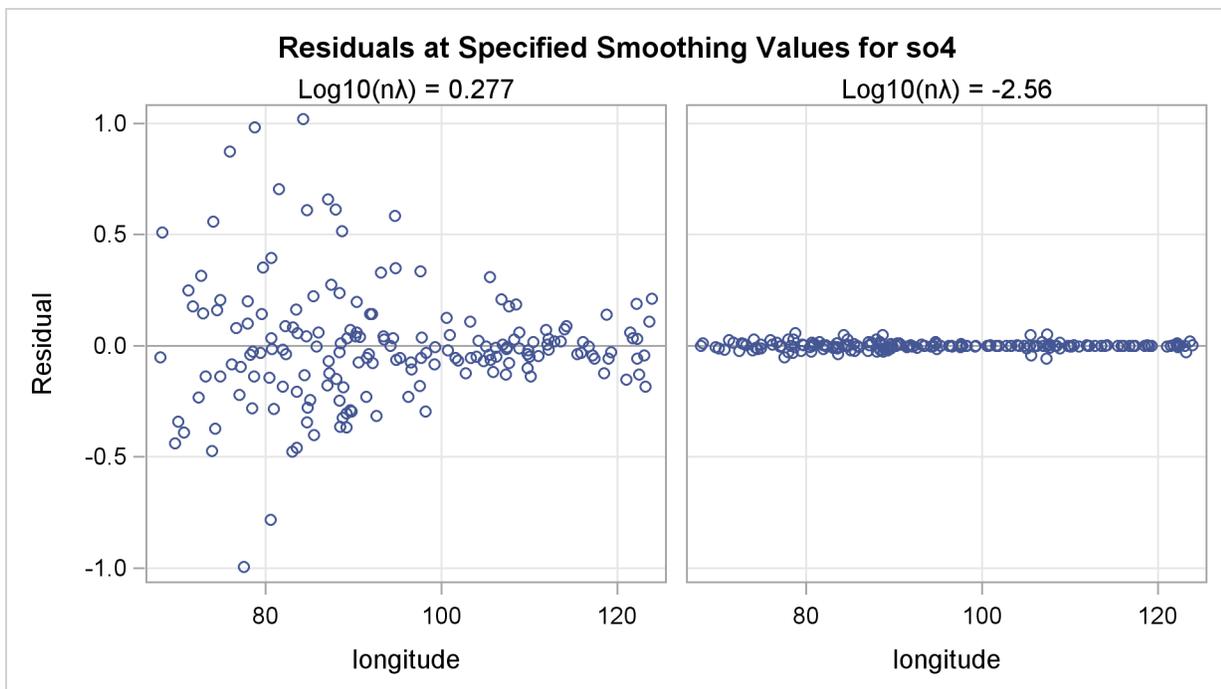

In summary, the fit with $\log_{10}(n\lambda) = 0.277$ represents the underlying surface, while the fit with the $\log_{10}(n\lambda) = -2.56$ overfits the data and captures the additional noise component.

Example 90.4: Large Data Set Application

This example illustrates how you can use the `D=` option to decrease the computation time needed by the TPSPLINE procedure. Although the `D=` option can be helpful in decreasing computation time for large data sets, it might produce unexpected results when used with small data sets.

The following statements generate the data set large:

```
data large;
  do x=-5 to 5 by 0.02;
    y=5*sin(3*x)+1*rannor(57391);
    output;
  end;
run;
```

The data set large contains 501 observations with one independent variable `x` and one dependent variable `y`. The following statements invoke PROC TPSPLINE to produce a thin-plate smoothing spline estimate and the associated 99% confidence interval. The output statistics are saved in the data set fit1.

```
proc tpspline data=large;
  model y =(x) /lognlambda=(-5 to -1 by 0.2) alpha=0.01;
  output out=fit1 pred lclm uclm;
run;
```

The results from this MODEL statement are displayed in [Output 90.4.1](#).

Output 90.4.1 Output from PROC TPSPLINE without the `D=` Option

Raw Data	
The TPSPLINE Procedure	
Dependent Variable: y	
Summary of Input Data Set	
Number of Non-Missing Observations	501
Number of Missing Observations	0
Unique Smoothing Design Points	501
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	1
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	2

Output 90.4.1 *continued*

GCV Function	
log10 (n*Lambda)	GCV
-5.000000	1.258653
-4.800000	1.228743
-4.600000	1.205835
-4.400000	1.188371
-4.200000	1.174644
-4.000000	1.163102
-3.800000	1.152627
-3.600000	1.142590
-3.400000	1.132700
-3.200000	1.122789
-3.000000	1.112755
-2.800000	1.102642
-2.600000	1.092769
-2.400000	1.083779
-2.200000	1.076636
-2.000000	1.072763*
-1.800000	1.074636
-1.600000	1.087152
-1.400000	1.120339
-1.200000	1.194023
-1.000000	1.344213

Note: * indicates minimum GCV value.

Summary Statistics of Final Estimation	
log10 (n*Lambda)	-1.9483
Smoothing Penalty	9953.7066
Residual SS	475.0984
Tr (I-A)	471.0861
Model DF	29.9139
Standard Deviation	1.0042
GCV	1.0726

The following statements specify an identical model, but with the additional specification of the `D=` option. The estimates are obtained by treating nearby points as replicates.

```
proc tpspline data=large;
  model y =(x) /lognlambda=(-5 to -1 by 0.2) d=0.05 alpha=0.01;
  output out=fit2 pred lclm uclm;
run;
```

The output is displayed in [Output 90.4.2](#).

Output 90.4.2 Output from PROC TPSPLINE with the D= Option

```

Raw Data

The TPSPLINE Procedure
Dependent Variable: y

Summary of Input Data Set

Number of Non-Missing Observations    501
Number of Missing Observations       0
Unique Smoothing Design Points       251

Summary of Final Model

Number of Regression Variables        0
Number of Smoothing Variables        1
Order of Derivative in the Penalty   2
Dimension of Polynomial Space        2

GCV Function

log10(n*Lambda)      GCV
-5.000000            1.306536
-4.800000            1.261692
-4.600000            1.226881
-4.400000            1.200060
-4.200000            1.179284
-4.000000            1.162776
-3.800000            1.149072
-3.600000            1.137120
-3.400000            1.126220
-3.200000            1.115884
-3.000000            1.105766
-2.800000            1.095730
-2.600000            1.085972
-2.400000            1.077066
-2.200000            1.069954
-2.000000            1.066076*
-1.800000            1.067929
-1.600000            1.080419
-1.400000            1.113564
-1.200000            1.187172
-1.000000            1.337252

Note: * indicates minimum GCV value.

```

Output 90.4.2 *continued*

Summary Statistics of Final Estimation	
log10(n*Lambda)	-1.9477
Smoothing Penalty	9943.5618
Residual SS	472.1424
Tr (I-A)	471.0901
Model DF	29.9099
Standard Deviation	1.0011
GCV	1.0659

The difference between the two estimates is minimal. However, the CPU time for the second MODEL statement is only about 1/7 of the CPU time used in the first model fit.

The following statements produce a plot for comparison of the two estimates:

```

data fit2;
  set fit2;
  P1_y    = P_y;
  LCLM1_y = LCLM_y;
  UCLM1_y = UCLM_y;
  drop P_y LCLM_y UCLM_y;

proc sort data=fit1;
  by x y;
proc sort data=fit2;
  by x y;

data comp;
  merge fit1 fit2;
  by x y;
  label p1_y    ="Yhat1" p_y="Yhat0"
        lclm_y ="Lower CL"
        uclm_y ="Upper CL";

ods graphics on;
proc sgplot data=comp;
  title "Comparison of Two Estimates";
  title2 "with and without the D= Option";


  yaxis label="Predicted y Values";
  xaxis label="x";

  band x=x lower=lclm_y upper=uclm_y /name="range"
      legendlabel="99% CI of Predicted y without D=";
  series x=x y=P_y/ name="P_y" legendlabel="Predicted y without D="
      lineattrs=graphfit(thickness=1px pattern=shortdash);
  series x=x y=P1_y/ name="P1_y" legendlabel="Predicted y with D="
      lineattrs=graphfit(thickness=1px color=red);
  discretelegend "range" "P_y" "P1_y";
run;
ods graphics off;

```

The estimates from fit1 and fit2 are displayed in [Output 90.4.3](#) with the 99% confidence interval from the fit1 output data set.

Output 90.4.3 Comparison of Two PROC TPSPLINE Fits with and without the D= Option

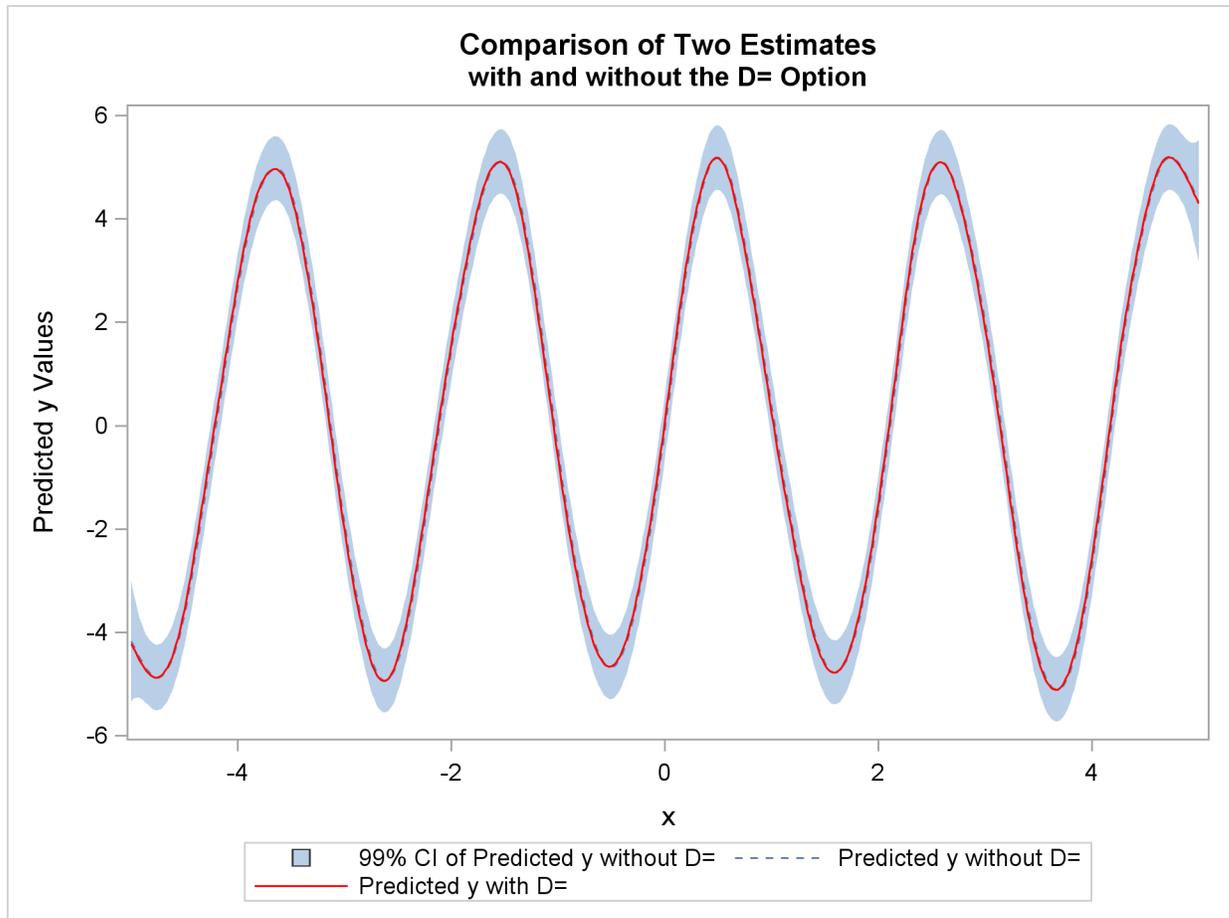

Example 90.5: Computing a Bootstrap Confidence Interval

This example illustrates how you can construct a bootstrap confidence interval by using the multiple responses feature in PROC TPSPLINE.

Numerous epidemiological observations have indicated that exposure to solar radiation is an important factor in the etiology of melanoma. The following data present age-adjusted melanoma incidences for 37 years from the Connecticut Tumor Registry (Houghton, Flannery, and Viola 1980). The data are analyzed by Ramsay and Silverman (1997).

```

data melanoma;
  input year incidences @@;
datalines;
1936 0.9 1937 0.8 1938 0.8 1939 1.3
1940 1.4 1941 1.2 1942 1.7 1943 1.8
1944 1.6 1945 1.5 1946 1.5 1947 2.0
1948 2.5 1949 2.7 1950 2.9 1951 2.5
1952 3.1 1953 2.4 1954 2.2 1955 2.9
1956 2.5 1957 2.6 1958 3.2 1959 3.8
1960 4.2 1961 3.9 1962 3.7 1963 3.3
1964 3.7 1965 3.9 1966 4.1 1967 3.8
1968 4.7 1969 4.4 1970 4.8 1971 4.8
1972 4.8
;

```

The variable `incidences` records the number of melanoma cases per 100,000 people for the years 1936 to 1972. The following model fits the data and requests a 90% Bayesian confidence interval along with the estimate:

```

ods graphics on;
proc tpspline data=melanoma plots(only)=(criterionplot fitplot(clm));
  model incidences = (year) /alpha = 0.1;
  output out = result pred uclm lclm;
run;

```

The output is displayed in [Output 90.5.1](#)


Output 90.5.1 Output from PROC TPSPLINE for the MELANOMA Data

Comparison of Two Estimates with and without the D= Option	
The TPSPLINE Procedure Dependent Variable: incidences	
Summary of Input Data Set	
Number of Non-Missing Observations	37
Number of Missing Observations	0
Unique Smoothing Design Points	37
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	1
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	2

Output 90.5.1 continued

Summary Statistics of Final Estimation	
log10(n*Lambda)	-0.0607
Smoothing Penalty	0.5171
Residual SS	1.2243
Tr(I-A)	22.5852
Model DF	14.4148
Standard Deviation	0.2328
GCV	0.0888

The estimated curve is displayed with 90% confidence interval bands in [Output 90.5.2](#). The number of melanoma incidences exhibits a periodic pattern and increases over the years. The periodic pattern is related to sunspot activity and the accompanying fluctuations in solar radiation.

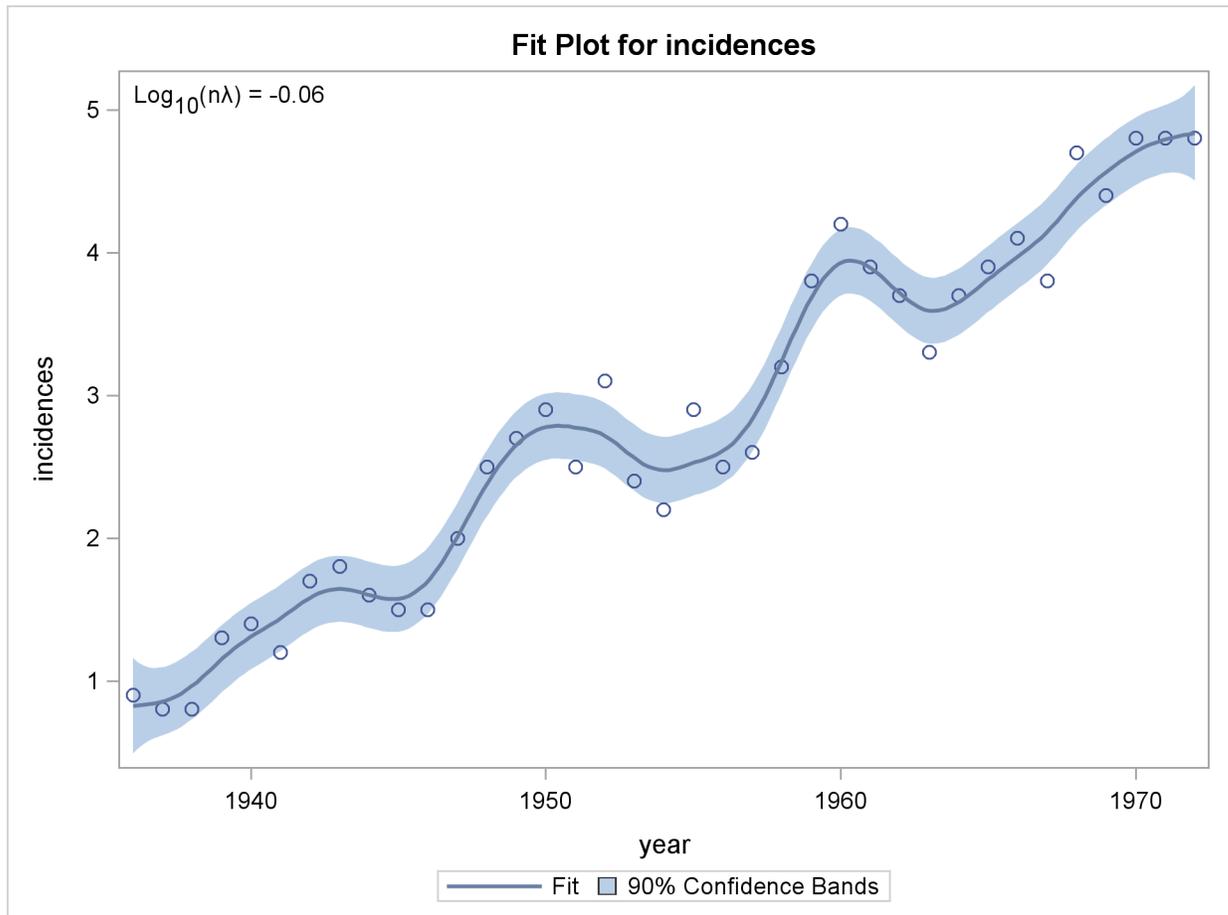Output 90.5.2 PROC TPSPLINE Estimate and 90% Confidence Interval of Data Set MELANOMA

Wang and Wahba (1995) compare several bootstrap confidence intervals to Bayesian confidence intervals for smoothing splines. Both bootstrap and Bayesian confidence intervals are across-the-curve intervals, not pointwise intervals. They concluded that bootstrap confidence intervals work

as well as Bayesian intervals concerning average coverage probability. Additionally, bootstrap confidence intervals appear to be better for small sample sizes. Based on their simulation, the “percentile- t interval” bootstrap interval performs better than the other types of bootstrap intervals.

Suppose that \hat{f}_λ and $\hat{\sigma}$ are the estimates of f and σ from the data. Assume that f_λ is the “true” f , and generate the bootstrap sample as

$$y_i^* = \hat{f}_\lambda(\mathbf{x}_i) + \epsilon_i^*, \quad i = 1, \dots, n$$

where $\boldsymbol{\epsilon}^* = (\epsilon_1^*, \dots, \epsilon_n^*)^T \sim N(0, \hat{\sigma} \mathbf{I})$. Denote $f_\lambda^*(\mathbf{x}_i)$ as the random variable of the bootstrap estimate at \mathbf{x}_i . Repeat this process K times, so that at each point \mathbf{x}_i , you have K bootstrap estimates $\hat{f}_\lambda^*(\mathbf{x}_i)$ or K realizations of $f_\lambda^*(\mathbf{x}_i)$. For each fixed \mathbf{x}_i , consider the statistic D_i^* , which is similar to the Student’s t statistic,

$$D_i^* = \left(f_\lambda^*(\mathbf{x}_i) - \hat{f}_\lambda(\mathbf{x}_i) \right) / \hat{\sigma}_i^*$$

where $\hat{\sigma}_i^*$ is the estimate of $\hat{\sigma}$ based on the i th bootstrap sample.

Suppose $\chi_{\alpha/2}$ and $\chi_{1-\alpha/2}$ are the lower and upper $\alpha/2$ points, respectively, of the empirical distribution of D_i^* . The $(1 - \alpha)100\%$ bootstrap confidence interval is defined as

$$\left(\hat{f}_\lambda(\mathbf{x}_i) - \chi_{1-\alpha/2} \hat{\sigma}, \hat{f}_\lambda(\mathbf{x}_i) - \chi_{\alpha/2} \hat{\sigma} \right)$$

Bootstrap confidence intervals are easy to interpret and can be used with any distribution. However, because they require K model fits, their construction is computationally intensive.

The feature of multiple dependent variables in PROC TPSPLINE enables you to fit multiple models with the same independent variables. The procedure calculates the matrix decomposition part of the calculations only once, regardless of the number of dependent variables in the model. These calculations are responsible for most of the computing time used by the TPSPLINE procedure. This feature is particularly useful when you need to generate a bootstrap confidence interval.

To construct a bootstrap confidence interval, perform the following tasks:

- Fit the data by using PROC TPSPLINE and obtain estimates $\hat{f}_\lambda(\mathbf{x}_i)$ and $\hat{\sigma}$.
- Generate K bootstrap samples based on $\hat{f}_\lambda(\mathbf{x}_i)$ and $\hat{\sigma}$.
- Fit the K bootstrap samples with the TPSPLINE procedure to obtain estimates of $\hat{f}_\lambda^*(\mathbf{x}_i)$ and $\hat{\sigma}_i^*$.
- Compute D_i^* and the values $\chi_{\alpha/2}$ and $\chi_{1-\alpha/2}$.

The following statements illustrate this process:

```
proc tpspline data=melanoma plots(only)=fitplot(c1m);
  model incidences = (year) /alpha = 0.1;
  output out=result pred uclm lclm;
run;
```

The output from the initial PROC TPSPLINE analysis is displayed in [Output 90.5.3](#). The data set result contains the predicted values and confidence limits from the analysis.

Output 90.5.3 Output from PROC TPSPLINE for the MELANOMA Data

Comparison of Two Estimates with and without the D= Option	
The TPSPLINE Procedure	
Dependent Variable: incidences	
Summary of Input Data Set	
Number of Non-Missing Observations	37
Number of Missing Observations	0
Unique Smoothing Design Points	37
Summary of Final Model	
Number of Regression Variables	0
Number of Smoothing Variables	1
Order of Derivative in the Penalty	2
Dimension of Polynomial Space	2
Summary Statistics of Final Estimation	
log10(n*Lambda)	-0.0607
Smoothing Penalty	0.5171
Residual SS	1.2243
Tr(I-A)	22.5852
Model DF	14.4148
Standard Deviation	0.2328
GCV	0.0888

The following statements illustrate how you can obtain a bootstrap confidence interval for the Melanoma data set. The following statements create the data set bootstrap. The observations are created with information from the preceding PROC TPSPLINE execution; as displayed in [Output 90.5.3](#), $\hat{\sigma} = 0.232823$. The values of $\hat{f}_{\lambda}(x_i)$ are stored in the data set result in the variable P_incidence.

```
data bootstrap;
  set result;
  array y{1070} y1-y1070;
  do i=1 to 1070;
    y{i} = p_incidences + 0.232823*rannor(123456789);
  end;
  keep y1-y1070 p_incidences year;
run;

ods listing close;
proc tpspline data=bootstrap plots=none;
  ods output FitStatistics=FitResult;
  id p_incidences;
  model y1-y1070 = (year);
  output out=result2;
run;
ods listing;
```

The DATA step generates 1,070 bootstrap samples based on the previous estimate from PROC TPSPLINE. For this data set, some of the bootstrap samples result in λ s (selected by the GCV function) that cause problematic behavior. Thus, an additional 70 bootstrap samples are generated.

The ODS listing destination is closed before PROC TPSPLINE is invoked. The PLOTS=NONE option suppresses all graphics output. The model fits all the $y_1 \dots y_{1070}$ variables as dependent variables, and the models are fit for all bootstrap samples simultaneously. The output data set result2 contains the variables year, $y_1 \dots y_{1070}$, $p_{y_1} \dots p_{y_{1070}}$, and p_incidences.

The ODS OUTPUT statement writes the FitStatistics table to the data set FitResult. The data set FitResult contains the two variables Parameter and Value. The FitResult data set is used in subsequent calculations for D_i^* .

In the data set FitResult, there are 63 estimates with a standard deviation of zero, suggesting that the estimates provide perfect fits of the data and are caused by $\hat{\lambda}$ s that are approximately equal to zero. For small sample sizes, there is a positive probability that the λ chosen by the GCV function will be zero (Wang and Wahba 1995).

In the following steps, these cases are removed from the bootstrap samples as “bad” samples: they represent failure of the GCV function.

The following SAS statements manipulate the data set FitResult, retaining the standard deviations for all bootstrap samples and merging FitResult with the data set result2, which contains the estimates for bootstrap samples. In the final data set boot, the D_i^* statistics are calculated.

```

data FitResult;
  set FitResult;
  if Parameter="Standard Deviation";
  keep Value;
run;

proc transpose data=FitResult out=sd prefix=sd;
run;

data result2;
  if _N_ = 1 then set sd;
  set result2;
run;

data boot;
  set result2;
  array y{1070} p_y1-p_y1070;
  array sd{1070} sd1-sd1070;
  do i=1 to 1070;
    if sd{i} > 0 then do;
      d = (y{i} - P_incidences)/sd{i};
      obs = _N_;
      output;
    end;
  end;
  keep d obs P_incidences year;
run;

```

The following SAS statements retain the first 1,000 bootstrap samples and calculate the values $\chi_{\alpha/2}$ and $\chi_{1-\alpha/2}$ with $\alpha = 0.1$.

```

proc sort data=boot;
  by obs;
run;

data boot;
  set boot;
  by obs;
  retain n;

  if first.obs then n=1;
  else n=n+1;
  if n > 1000 then delete;
run;

proc sort data=boot;
  by obs d;
run;

data chi1 chi2 ;
  set boot;
  if (_N_ = (obs-1)*1000+50) then output chi1;
  if (_N_ = (obs-1)*1000+950) then output chi2;
run;

proc sort data=result;
  by year;
run;

proc sort data=chi1;
  by year;
run;

proc sort data=chi2;
  by year;
run;

data result;
  merge result
    chi1(rename=(d=chi05))
    chi2(rename=(d=chi95));
  keep year incidences P_incidences lower upper
    LCLM_incidences UCLM_incidences;

  lower = -chi95*0.232823 + P_incidences;
  upper = -chi05*0.232823 + P_incidences;

  label lower="Lower 90% CL (Bootstrap)"
    upper="Upper 90% CL (Bootstrap)"
    lclm_incidences="Lower 90% CL (Bayesian)"
    uclm_incidences="Upper 90% CL (Bayesian)";
run;

```

The data set result contains the variables year and incidences, the PROC TPSPLINE estimate P_incidences, and the 90% Bayesian and 90% bootstrap confidence intervals.

The following statements produce [Output 90.5.4](#):

```
proc sgplot data=result;
  title "Age-adjusted Melanoma Incidence for 37 Years";

  xaxis label="year";
  yaxis label="Incidences";


  band x=year lower=lclm_incidences upper=uclm_incidences/name="bayesian"
    legendlabel="90% Bayesian CI of Predicted incidences"
    fillattrs=(color=red);
  band x=year lower=lower upper=upper/name="bootstrap"
    legendlabel="90% Bootstrap CI of Predicted incidences"
    transparency=0.05;
  scatter x=year y=incidences/name="obs" legendlabel="incidences";
  series x=year y=p_incidences/name="pred"
    legendlabel="predicted values of incidences"
    lineattrs=graphfit(thickness=1px);

  discretelegend "bayesian" "bootstrap" "obs" "pred";
run;

ods graphics off;
```

[Output 90.5.4](#) displays the plot of the variable incidences, the predicted values, and the Bayesian and bootstrap confidence intervals.

The plot shows that the bootstrap confidence interval is similar to the Bayesian confidence interval. However, the Bayesian confidence interval is symmetric around the estimates, while the bootstrap confidence interval is not.

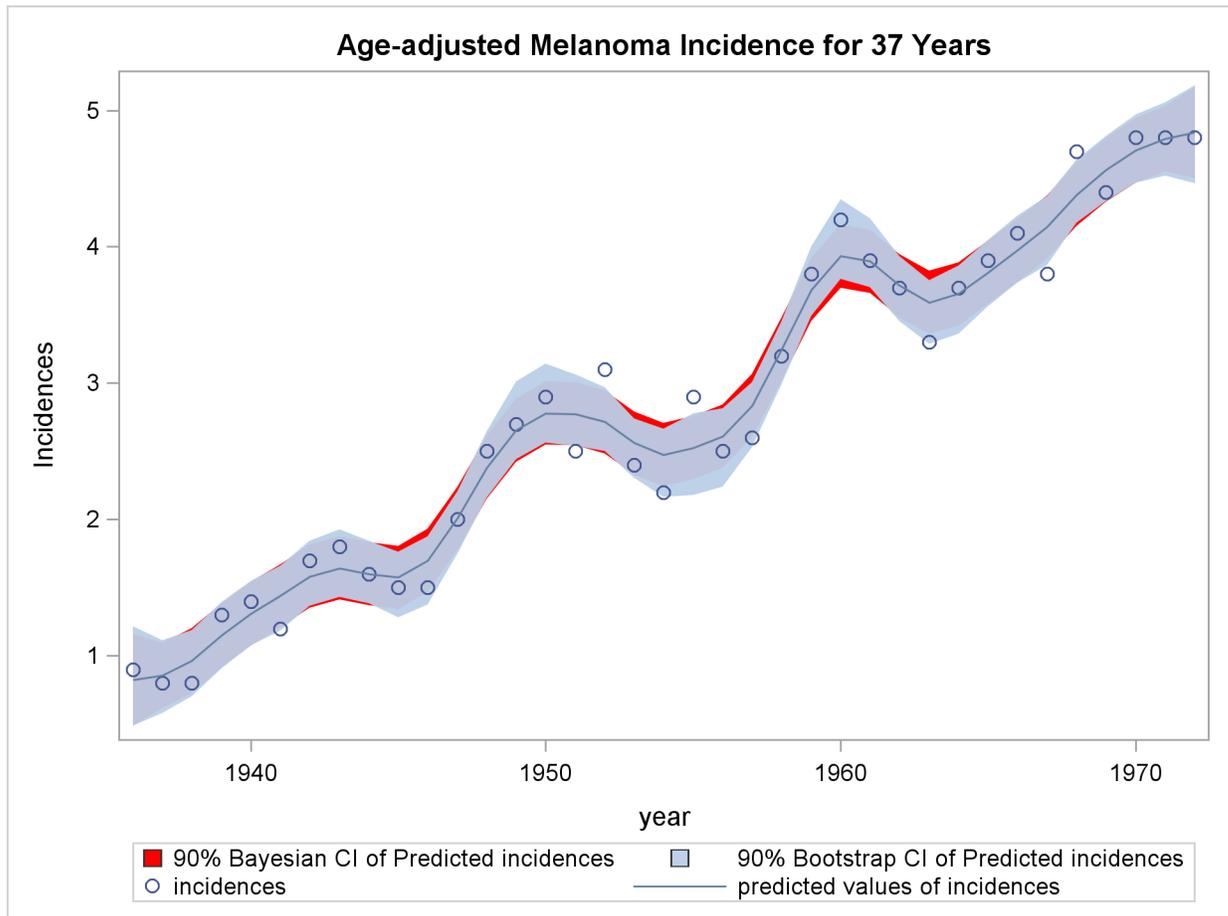Output 90.5.4 Comparison of Bayesian and Bootstrap Confidence Interval for Data Set MELANOMA

References

- Andrews, D (1988), *Asymptotic Optimality of Generalized C_L , Cross-Validation, and Generalized Cross-Validation in Regression with Heteroscedastic Errors*, manuscript, Cowles Foundation, Yale University, New Haven, CT.
- Bates, D., Lindstrom, M., Wahba, G., and Yandell, B. (1987), "GCVPACK-Routines for Generalized Cross Validation," *Communications in Statistics, Simulation and Computation*, 16, 263–297.
- Cleveland, W. S. (1993), *Visualizing Data*, Summit, NJ: Hobart Press.
- Dongarra, J., Bunch, J., Moler, C., and Steward, G. (1979), *Linpack Users' Guide*, Philadelphia: Society for Industrial and Applied Mathematics.
- Duchon, J. (1976), "Fonctions-Spline et Esperances Conditionnelles de Champs Gaussiens," *Annales Scientifiques de l'Université de Clermont-Ferrand 2 Série Mathématiques*, 14, 19–27.
- Duchon, J. (1977), "Splines Minimizing Rotation-Invariant Semi-Norms in Sobolev Spaces," in

- Constructive Theory of Functions of Several Variables*, eds. W. Schempp and K. Zeller, 85–100.
- Hall, P. and Titterton, D. (1987), “Common Structure of Techniques for Choosing Smoothing Parameters in Regression Problems,” *Journal of the Royal Statistical Society, Series B*, 49, 184–198.
- Houghton, A. N., Flannery, J., and Viola, M. V. (1980), “Malignant Melanoma in Connecticut and Denmark,” *International Journal of Cancer*, 25, 95–104.
- Hutchinson, M. and Bischof, R. (1983), “A New Method for Estimating the Spatial Distribution of Mean Seasonal and Annual Rainfall Applied to the Hunter Valley, New South Wales,” *Australian Meteorological Magazine*, 31, 179–184.
- Meinguet, J. (1979), “Multivariate Interpolation at Arbitrary Points Made Simple,” *Zeitschrift für Angewandte Mathematik und Physik (ZAMP)*, 30, 292–304.
- Nychka, D. (1986a), “The Average Posterior Variance of a Smoothing Spline and a Consistent Estimate of the Mean Square Error,” Technical Report 168, The Institute of Statistics, North Carolina State University, Raleigh, NC.
- Nychka, D. (1986b), “A Frequency Interpretation of Bayesian “Confidence” Interval for Smoothing Splines,” Technical Report 169, The Institute of Statistics, North Carolina State University, Raleigh, NC.
- Nychka, D. (1988), “Bayesian Confidence Intervals for Smoothing Splines,” *Journal of the American Statistical Association*, 83, 1134–1143.
- O’Sullivan, F. and Wong, T. (1987), “Determining a Function Diffusion Coefficient in the Heat Equation,” Technical Report 98, Department of Statistics, University of California, Berkeley.
- Ramsay, J. and Silverman, B. (1997), *Functional Data Analysis*, New York: Springer-Verlag.
- Seaman, R. and Hutchinson, M. (1985), “Comparative Real Data Tests of Some Objective Analysis Methods by Withholding,” *Australian Meteorological Magazine*, 33, 37–46.
- Villalobos, M. and Wahba, G. (1987), “Inequality Constrained Multivariate Smoothing Splines with Application to the Estimation of Posterior Probabilities,” *Journal of the American Statistical Association*, 82, 239–248.
- Wahba, G. (1983), “Bayesian ‘Confidence Intervals’ for the Cross Validated Smoothing Spline,” *Journal of the Royal Statistical Society, Series B*, 45, 133–150.
- Wahba, G., (1990), *Spline Models for Observational Data*, Philadelphia: Society for Industrial and Applied Mathematics.
- Wahba, G. and Wendelberger, J. (1980), “Some New Mathematical Methods for Variational Objective Analysis Using Splines and Cross Validation,” *Monthly Weather Review*, 108, 1122–1145.
- Wang, Y. and Wahba, G. (1995), “Bootstrap Confidence Intervals for Smoothing Splines and Their Comparison to Bayesian Confidence Intervals,” *Journal of Statistical Computation and Simulation*, 51, 263–279.

Subject Index

- Bayesian confidence interval
 - TPSPLINE procedure, 7566, 7586
- bootstrap confidence interval
 - TPSPLINE procedure, 7586
- design points
 - TPSPLINE procedure, 7544, 7571
- generalized cross validation (GCV)
 - TPSPLINE procedure, 7543, 7567, 7577
- goodness of fit
 - TPSPLINE procedure, 7567
- model degrees of freedom
 - TPSPLINE procedure, 7566
- nonhomogeneous variance
 - TPSPLINE procedure, 7568
- ODS Graphics
 - TPSPLINE procedure, 7554
- ordinary least squares
 - TPSPLINE procedure, 7543
- partial spline models
 - TPSPLINE procedure, 7570
- penalized least squares
 - TPSPLINE procedure, 7542, 7564, 7572
- polynomial space
 - TPSPLINE procedure, 7564
- QR decomposition
 - TPSPLINE procedure, 7565
- roughness penalty
 - TPSPLINE procedure, 7543, 7564, 7572
- semiparametric models
 - TPSPLINE procedure, 7544
- semiparametric regression models
 - TPSPLINE procedure, 7542, 7570
- smoothing parameter
 - TPSPLINE procedure, 7567
- theoretical foundation
 - TPSPLINE procedure, 7564
- TPSPLINE procedure
 - computational formulas, 7564
 - hat matrix, 7560
 - large data sets, 7582
 - main features, 7541
 - ODS graph names, 7569
 - ODS Graphics, 7554, 7569
 - ODS table names, 7568
 - order of the derivative, 7562
 - replicates, 7560
 - search range, 7562, 7578
 - significance level, 7560

Syntax Index

- ALPHA= option
 - MODEL statement (TPSPLINE), 7560
- BY statement
 - TPSPLINE procedure, 7559
- DATA= option
 - PROC TPSPLINE statement, 7554
 - SCORE statement (TPSPLINE), 7562
- DF= option
 - MODEL statement (TPSPLINE), 7560
- DISTANCE= option
 - MODEL statement (TPSPLINE), 7560
- FREQ statement
 - TPSPLINE procedure, 7559
- ID statement
 - TPSPLINE procedure, 7559
- LAMBDA0= option
 - MODEL statement (TPSPLINE), 7561
- LAMBDA= option
 - MODEL statement (TPSPLINE), 7561
- LOGNLAMBDA0= option
 - MODEL statement (TPSPLINE), 7561
- LOGNLAMBDA= option
 - MODEL statement (TPSPLINE), 7561
- M= option
 - MODEL statement (TPSPLINE), 7562
- MODEL statement
 - TPSPLINE procedure, 7560
- OUT= option
 - OUTPUT statement (TPSPLINE), 7563
 - SCORE statement (TPSPLINE), 7562
- OUTPUT statement
 - TPSPLINE procedure, 7563
- PLOTS option
 - PROC TPSPLINE statement, 7554
- PROC TPSPLINE statement, *see* TPSPLINE procedure
- RANGE= option
 - MODEL statement (TPSPLINE), 7562
- SCORE statement, TPSPLINE procedure, 7562
- TPSPLINE procedure
 - ALPHA= option, 7560
 - DF= option, 7560
 - DISTANCE= option, 7560
 - LAMBDA0= option, 7561
 - LAMBDA= option, 7561
 - LOGNLAMBDA0= option, 7561
 - LOGNLAMBDA= option, 7561
 - M= option, 7562
 - RANGE= option, 7562
 - TPSPLINE procedure, BY statement, 7559
 - TPSPLINE procedure, FREQ statement, 7559
 - TPSPLINE procedure, ID statement, 7559
 - TPSPLINE procedure, MODEL statement, 7560
 - TPSPLINE procedure, OUTPUT statement, 7563
 - TPSPLINE procedure, PROC TPSPLINE statement, 7554
 - TPSPLINE procedure, SCORE statement, 7562
 - TPSPLINE procedure, syntax, 7553

Your Turn

We welcome your feedback.

- If you have comments about this book, please send them to **yourturn@sas.com**. Include the full title and page numbers (if applicable).
- If you have comments about the software, please send them to **suggest@sas.com**.

SAS® Publishing Delivers!

Whether you are new to the work force or an experienced professional, you need to distinguish yourself in this rapidly changing and competitive job market. SAS® Publishing provides you with a wide range of resources to help you set yourself apart. Visit us online at support.sas.com/bookstore.

SAS® Press

Need to learn the basics? Struggling with a programming problem? You'll find the expert answers that you need in example-rich books from SAS Press. Written by experienced SAS professionals from around the world, SAS Press books deliver real-world insights on a broad range of topics for all skill levels.

support.sas.com/saspress

SAS® Documentation

To successfully implement applications using SAS software, companies in every industry and on every continent all turn to the one source for accurate, timely, and reliable information: SAS documentation. We currently produce the following types of reference documentation to improve your work experience:

- Online help that is built into the software.
- Tutorials that are integrated into the product.
- Reference documentation delivered in HTML and PDF – free on the Web.
- Hard-copy books.

support.sas.com/publishing

SAS® Publishing News

Subscribe to SAS Publishing News to receive up-to-date information about all new SAS titles, author podcasts, and new Web site features via e-mail. Complete instructions on how to subscribe, as well as access to past issues, are available at our Web site.

support.sas.com/spn



sas

**THE
POWER
TO KNOW®**

