



THE
POWER
TO KNOW.

SAS[®] Forecast Analyst Workbench 5.2

Administrator's Guide, Second Edition

The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2015. *SAS® Forecast Analyst Workbench 5.2: Administrator's Guide, Second Edition*. Cary, NC: SAS Institute Inc.

SAS® Forecast Analyst Workbench 5.2: Administrator's Guide, Second Edition

Copyright © 2015, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513-2414.

May 2015

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit support.sas.com/bookstore or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

Contents

PART 1 Introduction to SAS Forecast Analyst Workbench 1

Chapter 1 / Welcome to SAS Forecast Analyst Workbench	3
What is SAS Forecast Analyst Workbench?	3
Functional Components of SAS Forecast Analyst Workbench	3
Chapter 2 / SAS Forecast Analyst Workbench Architecture	5
Overview of the Architecture of SAS Forecast Analyst Workbench	5
Client Tier	6
Middle Tier	7
Server Tier	7
Data Tier	8

PART 2 Application Management 9

Chapter 3 / Performing Pre-installation Tasks	11
Overview of Pre-installation Tasks	11
Verifying System Requirements	11
Completing the Pre-installation Tasks for the SAS Intelligence Platform	12
Creating a SAS Forecast Analyst Workbench User	12
SAS Software Order and SAS Software Depot	13
Obtaining a Deployment Plan	13
Confirming the Deployment for SAS Visual Analytics Administration and Reporting	13
Determining the Location of the SAS Environment URL	13
About Migration	14
Chapter 4 / Installing SAS Forecast Analyst Workbench	15
Selecting a Single-Tier or Multi-Tier Installation	15
SAS Deployment Wizard Tasks	16
Reviewing the Instructions.html Document	16
Default File Locations	17
Chapter 5 / Performing Post-Installation Tasks	19
Set the Secure Attribute for Session Cookies	20
Update PostgreSQL Configuration	20
Verify SASApp Server Context	21
Updating Permissions Granted to Users	21
Authorize a User to Access SAS Visual Analytics	25
Capabilities in SAS Forecast Analyst Workbench	26
Configuring SAS Forecast Analyst Workbench Parameters	30
Running ETL Jobs	35
Authorizing Users to Access Data	35

Performing Miscellaneous Tasks	39
--------------------------------------	----

PART 3 Data Management 43

Chapter 6 / Flow of Data in SAS Forecast Analyst Workbench	45
Loading and Accessing Data	45
Configuring Data for SAS Forecast Analyst Workbench	47
Libraries In SAS Forecast Analyst Workbench	49
Chapter 7 / ETL Tasks	51
Overview of ETL Jobs	51
Configuring Parameters	52
Preparing SAS Forecast Analyst Workbench Data	52
Running Configuration Jobs	54
Running Initial Jobs	55
Loading Data into the Stage Area	57
Running Ongoing Jobs	60
Authorizing Users to Access Data	61
Chapter 8 / SAS Forecast Analyst Workbench Configuration Tables	63
Overview of the Configuration Tables	63
BATCH_INTERVAL_THREADS	64
CREATE_EVENT	64
DIM_HIERARCHY	65
DIM_HIERARCHY_LVL	66
DIM_TABLE_LIST	67
DIM_VAR_DISP_LIST	70
EVENT_REQUIRED	72
FORECAST_INTERVAL	73
HPF_PREFERENCES	75
INDEP_AGGRE_METHOD	79
INDEP_VAR_TABLE	80
KPI_CONFIG	81
NPF_CONFIG	83
NPF_MODEL_LOOKUP	85
NPF_REDUCTION_METHODS	86
PLAN_THREAD	87
TIME_DIM_HIERARCHY	87
TIME_DIM_HIERARCHY_LVL	88
Chapter 9 / Integrating SAS Forecast Analyst Workbench with SAS Financial Management	91
Preparing Data to Integrate with SAS Financial Management	91
Integration Jobs for SAS Financial Management	92
SAS Financial Management Configuration Tables	98
Chapter 10 / Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics	105
Introduction to SAS Forecast Analyst Workbench and SAS Visual Analytics Integration	105
Guidelines for Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics	106
Preparing Data to Integrate with SAS Visual Analytics	107
Integration Jobs for SAS Visual Analytics	108
SAS Visual Analytics Integration Tables	110

Chapter 11 / Integrating SAS Forecast Analyst Workbench with Another SAS Solution	117
About Integrating SAS Forecast Analyst Workbench with Another SAS Solution	117
Integrate SAS Forecast Analyst Workbench with Another SAS Solution	117
Integration Configuration Tables	118

PART 4 Customizing SAS Forecast Analyst Workbench 121

Appendix 1 / Adding a Calendar for Collaboration	123
About Adding a Calendar for Collaboration	123
Add a Calendar	123
Appendix 2 / Adding an Alternate Hierarchy for Collaboration	125
About Adding an Alternate Hierarchy for Collaboration	125
Add an Alternate Hierarchy	125
Appendix 3 / Extracting Data for All Stakeholders of a Plan	127
About Extracting Data for All Stakeholders of a Plan	127
Extract Data for All Stakeholders of a Plan	127
Appendix 4 / Adding a Dimension to an Existing Plan	129
About Adding a Dimension to an Existing Plan	129
Adding a Dimension to an Existing Plan	129
Appendix 5 / Using a Custom Model	131
Writing Code for a Custom Model	131
Input Table	132
Output Table	133
Code for the ddcf_npf_spec Macro	133
Appendix 6 / Archiving Data for Reporting	137
Appendix 7 / Seeding Analysis Variables	139
Appendix 8 / Working with Product Life Cycle Data	143
Overview	143
Load Product Life Cycle Data Into SAS Forecast Analyst Workbench	143
Export Product Life Cycle Data from SAS Forecast Analyst Workbench	144
Recommended Reading	145
Index	147



Part 1

Introduction to SAS Forecast Analyst Workbench

Chapter 1

Welcome to SAS Forecast Analyst Workbench 3

Chapter 2

SAS Forecast Analyst Workbench Architecture 5

1

Welcome to SAS Forecast Analyst Workbench

<i>What is SAS Forecast Analyst Workbench?</i>	3
<i>Functional Components of SAS Forecast Analyst Workbench</i>	3

What is SAS Forecast Analyst Workbench?

SAS Forecast Analyst Workbench is an analytical forecasting solution that uses actual values of key performance indicators (for example, demand) to generate predicted values. By forecasting the values of a KPI, you can perform downstream planning that can provide you with the following results:

- a reduction in stock orders of inventory
- a significant reduction in customer back orders
- a reduction in finished goods inventory
- consistently high levels of customer service, which results in high customer retention

SAS Forecast Analyst Workbench is an Adobe Flex client application. Users within your organization can access different parts of the solution based on the roles that are assigned to them. Users can view, review, interpret, and analyze the results of the forecasting and planning process.

Functional Components of SAS Forecast Analyst Workbench

SAS Forecast Analyst Workbench includes the following main functional components:

solution data mart

the ongoing ETL jobs update the solution data mart with changes from the source system

analytics

the analytical procedures that are required for forecasting processes

client applications

the SAS Forecast Analyst Workbench web application available through a web browser

These components are seamlessly integrated to offer a true end-to-end solution. SAS Forecast Analyst Workbench can take data from several source systems and provide information for advanced business decisions.

2

SAS Forecast Analyst Workbench Architecture

<i>Overview of the Architecture of SAS Forecast Analyst Workbench</i>	5
<i>Client Tier</i>	6
<i>Middle Tier</i>	7
<i>Server Tier</i>	7
<i>Data Tier</i>	8


Overview of the Architecture of SAS Forecast Analyst Workbench

SAS Forecast Analyst Workbench uses an n-tier architecture that consists of the following tiers:

- client tier
- middle tier
- server tier
- data tier

The following figure shows the products and solutions that comprise each tier and how the tiers interact.

Figure 2.1 SAS Forecast Analyst Workbench Architecture

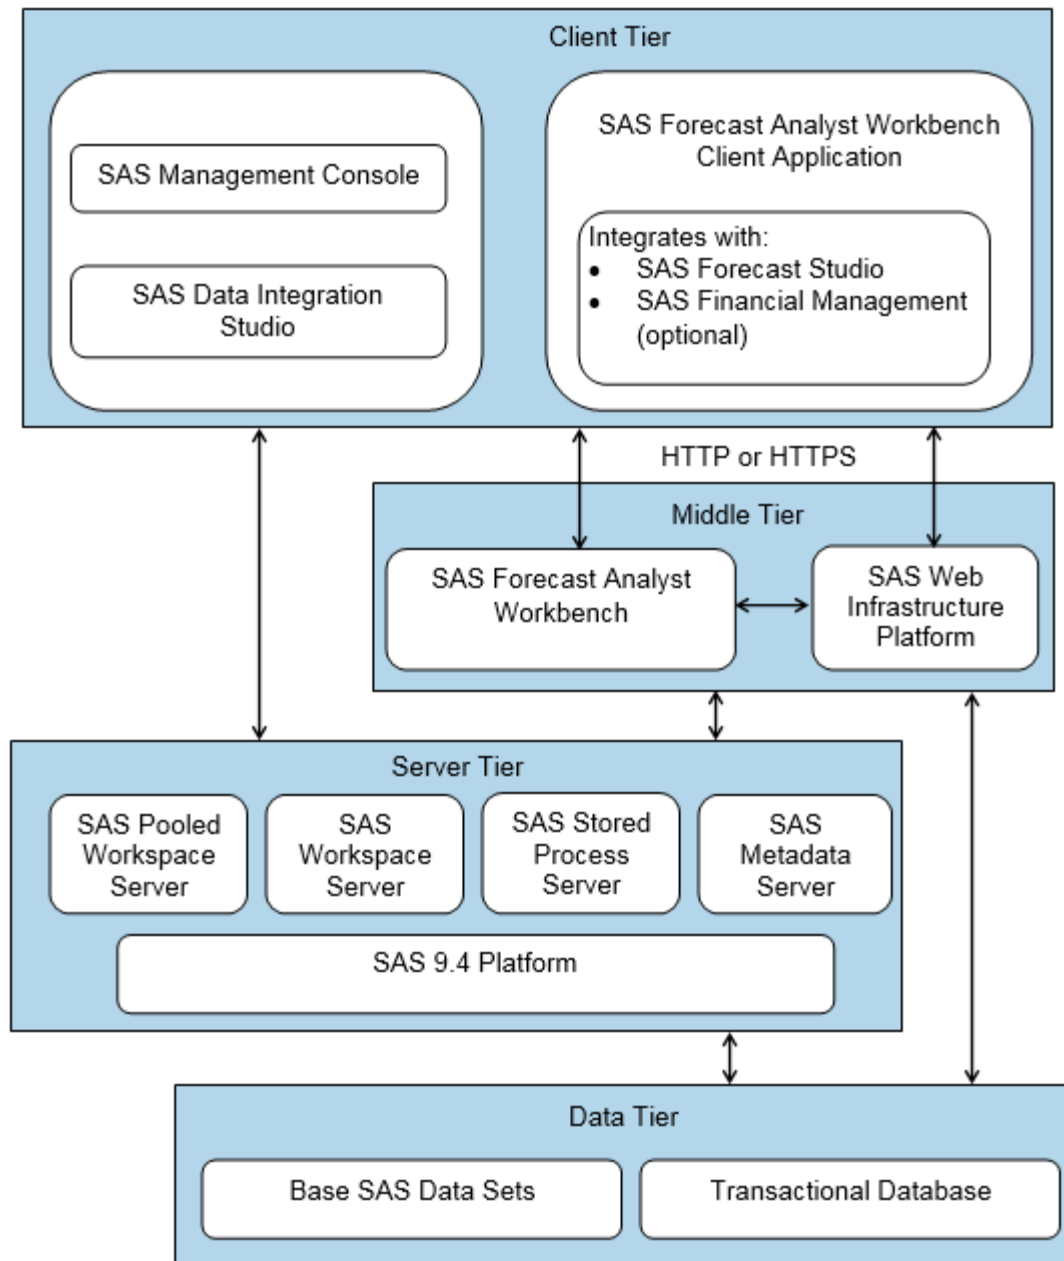

Client Tier

The client tier is responsible for user interaction, navigation flows, and displaying computational results.

SAS Forecast Analyst Workbench requires the following applications:

- **SAS Management Console:** Enables you to perform metadata administration activities.

- **SAS Data Integration Studio:** Provides the ability to manage ETL jobs for the extraction, transformation, and loading of data.
- **SAS Forecast Studio:** Enables you to use the forecasting capabilities of SAS Forecast Studio (for example, creating events and custom models) and to integrate the forecasted output in SAS Forecast Analyst Workbench.
- **SAS Financial Management:** Enables you to use the capabilities of SAS Financial Management for the collaboration planning process. Depending on the license that your organization has purchased, SAS Financial Management might be included in the order.

Middle Tier

The middle tier is responsible for receiving the client request and for providing an execution environment to the client. The middle tier of SAS Forecast Analyst Workbench was developed over SAS Intelligence Platform middle-tier technologies such as SAS Web Infrastructure Platform and SAS Foundation Services. These services make it possible for the middle-tier application to run requests over SAS servers.

SAS Forecast Analyst Workbench requires the following middle-tier components:

- **SAS Forecast Analyst Workbench Services:** Takes adequate server-side actions based on client-side actions.
- **SAS Web Infrastructure Platform Services:** Used for standard operations, such as configuration, authentication, scheduler for batch processing, and so on.

The client tier communicates with the middle tier by using an HTTP-based communication model or an HTTPS-based communication model.

Server Tier

The server tier hosts various SAS servers that run the requests that are made by clients. Topological support might include support for non-functional requirements, such as fail-over, pooling, and load balancing.

SAS Forecast Analyst Workbench requires the following server-tier components:

- **SAS Pooled Workspace Server:** Enables the middle tier to connect to SAS data sets in order to access the forecasted data.
- **SAS Workspace Server:** Executes SAS code for one client at a time.
- **SAS Stored Process Server:** Runs a registered stored process.
- **SAS Metadata Server:** Controls access to a central repository of metadata that is shared by all of the SAS applications in the deployment. The SAS Metadata Server enables centralized control so that all users access consistent and accurate data.

Data Tier

The data tier consists of the following data storage types:

- **Base SAS data sets:** Stored in Base SAS formats, using different libraries.
- **Transactional database:** Stores the transactional data that is used for forecasting. You use PostgreSQL as a transactional database for SAS Forecast Analyst Workbench.



Part 2

Application Management

<i>Chapter 3</i>	
<i>Performing Pre-installation Tasks</i>	11
<i>Chapter 4</i>	
<i>Installing SAS Forecast Analyst Workbench</i>	15
<i>Chapter 5</i>	
<i>Performing Post-Installation Tasks</i>	19

3

Performing Pre-installation Tasks

<i>Overview of Pre-installation Tasks</i>	11
<i>Verifying System Requirements</i>	11
<i>Completing the Pre-installation Tasks for the SAS Intelligence Platform</i>	12
<i>Creating a SAS Forecast Analyst Workbench User</i>	12
<i>SAS Software Order and SAS Software Depot</i>	13
<i>Obtaining a Deployment Plan</i>	13
<i>Confirming the Deployment for SAS Visual Analytics Administration and Reporting</i>	13
<i>Determining the Location of the SAS Environment URL</i>	13
<i>About Migration</i>	14

Overview of Pre-installation Tasks

Before you install SAS Intelligence Platform and SAS Forecast Analyst Workbench, you must complete the following pre-installation tasks:

- verify the operating system requirements
- complete the pre-installation tasks that are required for installing SAS Intelligence Platform
- create a SAS Forecast Analyst Workbench user
- create a software depot
- obtain a deployment plan

Verifying System Requirements

Before you install SAS Forecast Analyst Workbench, ensure that you meet the minimum system requirements that are described in *System Requirements—SAS Forecast Analyst Workbench 5.2*. System requirements are unique for each operating system. Items that are addressed as system requirements include software requirements, hardware requirements, space requirements, specific product requirements, and graphics hardware and software compatibility.

The detailed system requirements for SAS Forecast Analyst Workbench in the distributed mode are available at <http://support.sas.com/documentation/installcenter/en/ikforecstanofrsr/67819/HTML/default/index.html>.

The detailed system requirements for SAS Forecast Analyst Workbench in the non-distributed mode are available at <http://support.sas.com/documentation/installcenter/en/ikforecstanofrndmsr/67820/HTML/default/index.html>.

You should specifically check the following settings:

- Set the screen resolution for SAS Forecast Analyst Workbench no lower than 1024 x 768.
- Set your browser's pop-up blocker to allow pop-ups for your applications.

For more requirements information, see “SAS 9.4 System Requirements” at <http://support.sas.com/resources/sysreq/index.html>.

Completing the Pre-installation Tasks for the SAS Intelligence Platform

Before you install the SAS Intelligence Platform and SAS Forecast Analyst Workbench, read *SAS Intelligence Platform: Overview*. The overview is available at <http://support.sas.com/documentation/cdl/en/biov/64876/HTML/default/viewer.htm>. SAS Forecast Analyst Workbench is designed to work with the SAS Intelligence Platform. The overview will help you understand pre-installation tasks and will guide you through a typical installation.

The pre-installation tasks include installing third-party components, confirming that your operating system requirements are met, creating the required user accounts, and obtaining your SAS software. For more information, see *SAS Intelligence Platform: Installation and Configuration Guide*. This document is available at <http://support.sas.com/documentation/onlinedoc/intellplatform/>.

You must also use the Pre-Installation Checklist that accompanies the Deployment Plan that was prepared for deployment of SAS Forecast Analyst Workbench at your site. Complete the work in the checklist before beginning the deployment at your site. The list includes tasks that are specific to your deployment, information about the third-party software required on each tier in your deployment, the required operating system accounts and groups needed on each machine, and port numbers needed on each machine before starting the deployment.

Creating a SAS Forecast Analyst Workbench User

You must create an operating system user account that will be used to prepare SAS Forecast Analyst Workbench for use by running a series of ETL jobs. You can use an existing user account if one already exists. This user is different from the user account that installs and configures SAS Forecast Analyst Workbench and the SAS Spawnd Servers account (sassrv). You can use the SAS Demo User account suggested in the Pre-Installation Checklist.

For more information about users and groups, see “Setting Up Users, Groups, and Ports” in the *SAS Intelligence Platform: Installation and Configuration Guide*. The document is available at <http://support.sas.com/documentation/cdl/en/biig/63852/HTML/default/viewer.htm>.

SAS Software Order and SAS Software Depot

Your SAS Software Order E-Mail (SOE) provides you with information about how to download your SAS Software Depot. Follow those instructions to download your software and create a SAS Software Depot. An instructional video for SAS 9.4 Software Depots is at this location:

<http://support.sas.com/documentation/installcenter/gettingstarted/94/index.html>

Obtaining a Deployment Plan

Before you can install SAS Forecast Analyst Workbench, you must obtain a deployment plan. The deployment plan is a summary of the software that you install and configure during the deployment. The deployment plan file, named `plan.xml`, contains information about what software you should install and configure on each machine in your environment. This plan serves as input to the SAS installation and configuration tools. You should use the deployment plan that is created for your site. The deployment plan is accompanied by the pre-installation checklist. For more information, see “About Deployment Plans” in the *SAS Intelligence Platform: Installation and Configuration Guide*. The guide is available at <http://support.sas.com/documentation/onlinedoc/intellplatform/>.

Confirming the Deployment for SAS Visual Analytics Administration and Reporting

SAS Visual Analytics Administration and Reporting is included in your order. Determine whether your deployment includes distributed or non-distributed SAS LASR Analytic Server, and then complete the appropriate additional pre-installation tasks. For more information, see the Solution-Specific System Requirements and Installation Instructions section of the Pre-Installation checklist.

Determining the Location of the SAS Environment URL

During the deployment process, the SAS Deployment Wizard prompts you to specify the URL of the SAS environment file, which is named `sas-environment.xml` (for example, `http://<SAS Web Server host:port>/sas/sas-`

environment.xml). This file defines a set of SAS deployments at your site for client applications to use.

The sas-environment.xml file does not need to physically exist at the URL location that you specify in the SAS Deployment Wizard before you begin the SAS installation. However, it is important for you to know the value of this URL because every client installation is prompted for this value. If you do not specify the URL when you install SAS Forecast Analyst Workbench, then you must manually edit a file on every client machine as a post-installation task. Therefore, you should decide on a value for this URL during your planning process so that you can provide it to administrators who might perform an installation.

For more information about the structure of this file, see “Configuring the SAS Environment File” in the *SAS Intelligence Platform: Middle-Tier Administration Guide*. This guide is available at <http://support.sas.com/documentation/onlinedoc/intellplatform/>.

About Migration

You can migrate from SAS Forecast Analyst Workbench 5.1 to SAS Forecast Analyst Workbench 5.2. For more information about migration see *SAS Forecast Analyst Workbench: Migration Guide* located at <http://support.sas.com/documentation/solutions/faw/index.html>

4

Installing SAS Forecast Analyst Workbench

<i>Selecting a Single-Tier or Multi-Tier Installation</i>	15
<i>SAS Deployment Wizard Tasks</i>	16
<i>Reviewing the Instructions.html Document</i>	16
<i>Default File Locations</i>	17

Selecting a Single-Tier or Multi-Tier Installation

You can install SAS Forecast Analyst Workbench on one or on several machines. This choice is determined when you order SAS Forecast Analyst Workbench and is detailed in the deployment plan. You must first install SAS Forecast Analyst Workbench on the server tier, which can consist of multiple machines. You can then install SAS Forecast Analyst Workbench on your middle tier, which can also consist of multiple machines. For guidelines on installing SAS on multiple machines, see “Installation Order Rules for Multiple Machine Deployments” in *SAS Intelligence Platform: Installation and Configuration Guide*.

The server tier consists of a set of SAS servers that you install as a part of the SAS Intelligence Platform. These servers host (and can be used to load) the reporting data. In addition, they execute SAS analytical and reporting processes. The SAS Workspace Server, SAS Stored Process Server, and SAS Metadata Server enable this capability.

The middle tier hosts SAS web applications, including the SAS Forecast Analyst Workbench web application. These web applications are deployed on a Java web application server. The web application sends data to and receives data from the web browsers on the client machines. It then organizes the data for storage on the data tier and for use on the server tier.

The client tier is also part of the SAS Forecast Analyst Workbench configuration. On the client tier, users collect and load data and perform day-to-day operational tasks via the web application.

SAS Deployment Wizard Tasks

You use the SAS Deployment Wizard to install and configure the SAS software, the PostgreSQL database, and related products that are included in your deployment plan. When you execute the SAS Deployment Wizard, you select the deployment type that you are performing. You can choose to install and configure the software immediately, or you can configure the software at a later time.

Depending on your SAS software order, the SAS installation data file, and the deployment plan, the SAS Deployment Wizard prompts you to perform a variety of tasks, including the following items:

- specify the location of the deployment plan and the SAS software products that you are installing and configuring
- specify the email address to which SAS Forecast Analyst Workbench should send emails when an ad hoc scenario has completed running in the background
- specify required machine information
- specify server information for any SAS servers that you are installing
- specify user account information

Note: Specify the spawned server user to access and perform tasks related to stored processes.

- select the **Grant access to SAS Forecast Studio tasks** check box and create an environment for SAS Forecast Server
- specify a SAS internal account for the forecast server metadata user
- specify the credentials for using the PostgreSQL database
- specify the credentials for deploying SAS Financial Management

This item is optional and is required when SAS Financial Management is a part of the deployment plan.

Note: Do not include spaces in the directory name.

For more information, see “Preparing to Install and to Configure” in *SAS Intelligence Platform: Installation and Configuration Guide*. This document is available at <http://support.sas.com/documentation/onlinedoc/intellplatform/index.html>.

Reviewing the Instructions.html Document

After you have installed and configured your SAS software, the SAS Deployment Wizard writes the `Instructions.html` document to the `Documents` directory in your SAS configuration directory. The document contains additional information and details for configuring your installation. You should perform the additional steps that are included in the document.

When you are performing additional steps that are mentioned in the instructions.html, you might see the following warnings in the logs for the server that you are validating when you perform the Server Validation Steps provided in the Instructions.html on the SAS tier:

```
WARNING: User does not have appropriate authorization to access
Software component SAS Forecast Analyst Config 5.2
WARNING: Apparent symbolic reference GL_SHORT_YES not resolved.
WARNING: iotrans Libraray reference not found
```

To prevent these warnings, ensure that you run the script as the SAS Demo User if you chose to create it when you were prompted in the SAS Deployment Wizard.

Default File Locations

The SAS Deployment Wizard installs and configures your SAS software. The application installation files are installed in a default location referred to as `<SAS Home>`. For example, on Windows systems, `<SAS Home>` is `C:/Program Files/SASHome`.

The configuration files are stored in a default location referred to as `SAS-configuration-directory`. For example, on Windows systems, the SAS configuration directory is `C:/SAS/Config/Lev1`.

Note: You can deploy up to 10 configurations of the SAS products. For example, you can create an environment that consists of separate levels for development, test, and production. The SAS Deployment Wizard specifies each configuration in a `<Level>` folder. For example, if you deploy a level 2 configuration, the default configuration directory is `C:/SAS/Config/Lev2`. For more information about multiple-level configuration, see *SAS Intelligence Platform: System Administration Guide*.

The following table lists the default locations of the installation and configuration files for SAS Forecast Analyst Workbench.

Table 4.1 Default Locations

Location	Example Path on Windows Systems	Example Path on UNIX Systems
<code>SAS-configuration-directory</code>	<code>C:\SAS\Config\Lev<n></code>	<code>../SAS/Config/Lev<n></code>
<code>SASHome</code>	<code>C:\Program Files\SASHome</code>	<code>../SASHome</code>

5

Performing Post-Installation Tasks

<i>Set the Secure Attribute for Session Cookies</i>	20
<i>Update PostgreSQL Configuration</i>	20
<i>Verify SASApp Server Context</i>	21
<i>Updating Permissions Granted to Users</i>	21
Assigning Permissions to Users	21
Defining Groups, Roles, and Users	22
<i>Authorize a User to Access SAS Visual Analytics</i>	25
<i>Capabilities in SAS Forecast Analyst Workbench</i>	26
View and Assign Capabilities	26
Planning Capabilities	26
Modeling Capabilities	27
Collaboration Capabilities	27
Other Capabilities	28
Administrative Capabilities	29
<i>Configuring SAS Forecast Analyst Workbench Parameters</i>	30
Configure Parameters	30
About the Configuration Parameters	31
<i>Running ETL Jobs</i>	35
<i>Authorizing Users to Access Data</i>	35
Overview of Authorizing Users	35
Make a User or Group Solution Authorized	35
Assign Permissions to a User or Group to Access Data	36
Assigning Permissions to a User or Group for a Forecast, for a Modeling Project, or for a Plan	38
<i>Performing Miscellaneous Tasks</i>	39
Change the Log Level for Web Application Server	39
Verify the Default Path of Log Files	39
Update the Number of Time Series That Are Shown in the Model Management View	40
Disable the SAS Visual Analytics Hub	41
Allocate Required Space for a Java Virtual Machine	41
Specify Automatic Sending of Emails	41
Set Up the Environment for SAS Forecast Studio on UNIX	42
Limit the Reach of SAS Server Processes	42
Set Up Digital Certificates on a Secured Environment	42

Set the Secure Attribute for Session Cookies

The secure attribute for cookies directs a web browser to send the cookie only through an encrypted HTTPS connection.

To configure the SAS Web Application Server to return the session ID with the secure attribute:

- 1 Edit the *SAS-configuration-directory* \Levn\Web\WebAppServer\SASServern_m\conf\server.xml file. Add `secure="true"` to the existing `Connector` element.
- 2 Edit the *SAS-configuration-directory* \Levn\Web\WebAppServer\SASServern_m\conf\web.xml file. Add the following `session-config`:

```
<session-config>
    <session-timeout>30</session-timeout>
    <cookie-config>
        <secure>/true</secure>
    </cookie-config>
</session-config>
```

For more information, see “Configuring SAS Web Server Manually for HTTPS” at <http://support.sas.com/documentation/cdl/en/bimtag/66823/HTML/default/viewer.htm#n0nakjy6hlqmvn11p9p04l25j9n.htm>.

Update PostgreSQL Configuration

Immediately after you deploy SAS Forecast Analyst Workbench, update the PostgreSQL database configuration.

To configure PostgreSQL:

- 1 Open the `postgresql.conf` file that is located at the following location on the server-tier machine: *SAS-configuration-directory*\Levn\WebInfrastructurePlatformDataServer\data\
- 2 Change the value of `shared_buffers` to 4GB and the value of `max_connections` to 500.
- 3 Save the file.
- 4 Restart the data servers.

Verify SASApp Server Context

Immediately after you deploy SAS Forecast Analyst Workbench, verify the context of SASApp servers.

To verify the context of SASApp servers:

- 1 Log on to SAS Management Console as an unrestricted user (sasadm) or as a user who has the capability to verify the SASApp server context.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Configuration Management** ► **SAS Application Infrastructure** ► **Web Infra Platform Services 9.4** ► **JobExecutionService**.
- 3 Right-click **JobExecutionService** and select **Properties**. The JobExecutionService Properties dialog box appears.
- 4 On the **Settings** tab, verify that all SASApp server contexts are selected.
- 5 Click **OK**.

Updating Permissions Granted to Users

Assigning Permissions to Users

Assign Permissions to the SAS Server Users Group on Windows Systems

You must assign the SAS Server Users group Read, Write, and Modify permissions for the following folders on a Windows SAS Application Server machine:

- the SAS Forecast Analyst Workbench data folder located at *SAS-configuration-directory/AppData/SASForecastAnalystWorkbench*
- the SAS Forecast Analyst Workbench archive folder located at *SAS-configuration-directory/AppData/SASForecastAnalystWorkbench*
- the following folders inside the path *SAS-configuration-directory/Levn/SASApp/Data/*:
 - /FinancialManagement*

Note: If you are not using collaboration planning, you do not need to provide permission for this folder.
 - /FinancialManagement/StageFM*

Note: If you are not using collaboration planning, you do not need to provide permission for this folder.
 - /WRSDIST*
 - /WRSTEMP*

- the forecasting-related logs stored in the path that is specified in the `GL_FORECAST_LOG_PATH` parameter
For more information about configuration parameters, see “About the Configuration Parameters” on page 31.
- the path for the generic logs for SAS Forecast Analyst Workbench that is specified in the `GL_DDCF_LOG_PATH` parameter

For more information, go to <http://support.sas.com/documentation/cdl/en/biig/63852/HTML/default/viewer.htm#n02014intelplatform00install.htm>.

Assign SAS Users Permissions on UNIX Systems

In a UNIX operating environment, you must update several SAS script files. Updating the files ensures that SAS users have the necessary Write permissions to the tables that the SAS Workspace Server and the SAS Stored Process Server create.

Specify a umask setting of at least 002 in the following SAS scripts on the SAS Application Server machine:

- *SAS-configuration-directory/*
`Levn/SASApp/BatchServer/sasbatch_usermods.sh`
- *SAS-configuration-directory/*
`Levn/SASApp/PooledWorkspaceServer/PooledWorkspaceServer_usermods.sh`
- *SAS-configuration-directory/*
`Levn/SASApp/StoredProcessServer/StoredProcessServer_usermods.sh`
- *SAS-configuration-directory/*
`Levn/SASApp/WorkspaceServer/WorkspaceServer_usermods.sh`

The following code is a code snippet of the SAS script file

```
USERMODS_OPTIONS=  
umask 002
```

Defining Groups, Roles, and Users

Overview of Groups, Roles, and Users

In order to use SAS Forecast Analyst Workbench, you must configure groups, roles, and users.

groups

A group consists of users who are classified by common traits or by common data access levels. Groups are typically used for granting users access to data. Groups can also be used within workflows to allow a restricted set of users to perform an activity.

roles

Roles determine what a user can do within the application. Roles can also be used within workflows to allow a restricted set of users to perform an activity.

users

Every user who needs to log on to the SAS Forecast Analyst Workbench web application must be defined in the SAS Metadata Repository. The user

must be associated with one or more roles that permit one or more capabilities within SAS Forecast Analyst Workbench.

You define groups, roles, and users by using the User Manager function in SAS Management Console.

Note: For specific information about defining users, groups, and roles, see *SAS Management Console: Guide to Users and Permissions*.

Capabilities can be associated with roles in SAS Management Console.

Groups, roles, and users can be referenced in user interface definitions.

Understanding Roles

Roles in SAS Forecast Analyst Workbench are activity based. You assign roles to groups, and those role assignments are cumulative. For example, if a group is assigned to more than one role, that group does not lose any capabilities if the capabilities of the roles are different. For example, suppose a group is associated with Role 1 and Role 2. If Role 1 grants a group a specific capability but Role 2 does not, the group retains that capability.

After you deploy SAS Forecast Analyst Workbench, ensure that the following roles have been created in SAS Management Console:

- Forecast Analyst: Analysis
- Forecast Analyst: Planning
- Forecast Analyst: Process Administration

In addition to the roles that are created after you deploy SAS Forecast Analyst Workbench, you can create roles that are based on your business requirements. For more information about creating roles, see *SAS Management Console: Guide to Users and Permissions*.

Understanding Groups

A group in SAS Forecast Analyst Workbench is based on the area of work associated with the users in that particular group. You can add users to the groups based on their area of work. For example, a database administrator can be a member of the database users group. You can add a user to multiple groups. Every group is associated with a role, and the capabilities of that role are inherited by the group.

After you deploy SAS Forecast Analyst Workbench, ensure that the following groups are created in SAS Management Console:

- Forecast Analyst Analysis Users
- Forecast Analyst Database Users
- Forecast Analyst ETL Users
- Forecast Analyst Planning Users
- Forecast Analyst Process Administration Users

Associate the Forecast Analyst Planning Users group with the user who creates the forecasts and performs planning-related tasks. The Forecast Analyst Planning Users group contains the following groups and roles:

- Financial Management: Process Administrator
- Forecast Analyst: Planning

- Forecast Analyst Database Users
- SASSDM Database Users
- Visual Data Builder Administrators

Associate the Forecast Analyst Analysis Users group with the users who perform model management-related tasks. The Forecast Analyst Analysis Users group contains the following groups and roles:

- Forecast Analyst: Analysis
- Forecast Analyst Database Users
- Forecast Server: Administrator
- Forecast Server: Analyst
- Forecast Server: Browser
- Forecast Server: Forecaster
- Job Execution: Job Submitter
- Visual Analytics Data Administrators
- Visual Data Builder Administrators

Associate Forecast Analyst ETL Users group with the user who runs the ETL jobs. The Forecast Analyst ETL Users group contains the following groups and roles:

- Financial Management: Process Administrator
- Forecast Analyst Database Users
- SASSDM Database Users
- Visual Analytics Data Administrators
- Visual Data Builder Administrators

Associate the Forecast Analyst Process Administration Users group with the user who administers SAS Forecast Analyst Workbench. The Forecast Analyst Process Administration Users group contains the following groups and roles:

- Forecast Analyst Database Users
- Forecast Analyst: Process Administration
- Financial Management: Process Administrator
- Forecast Server: Administrator
- Forecast Server: Analyst
- Forecast Server: Browser
- Forecast Server: Forecaster
- Job Execution: Job Submitter
- SASSDM Database Users
- Visual Analytics Data Administrators
- Visual Data Builder Administrators

Note: The groups and roles that are related to SAS Financial Management and SAS Visual Analytics are available only when these solutions are deployed along with SAS Forecast Analyst Workbench.

In addition to the groups that are created after you deploy SAS Forecast Analyst Workbench, you can create groups that are based on your business requirements. For more information about adding a group, see *SAS Management Console: Guide to Users and Permissions*.

Defining Users

You can create users who can access SAS Forecast Analyst Workbench. When you define users who can access SAS Forecast Analyst Workbench, you must conform to the following guidelines:

- on Windows, the user must be a user of your operating system user group SAS Server Users
- on UNIX, the user must be a part of the group that the installation user belongs to
- the user must be defined in SAS Management Console
- after you add the user, you must assign appropriate groups to that user

For more information about creating users and assigning groups and roles to them, see *SAS Management Console: Guide to Users and Permissions*.

Authorize a User to Access SAS Visual Analytics

When SAS Forecast Analyst Workbench and SAS Visual Analytics are installed on two separate servers, you must provide authorization to the user who accesses SAS Visual Analytics. For example, suppose SAS Forecast Analyst Workbench is installed on an AIX server and SAS Visual Analytics is installed on a LAX server. In such a scenario, you must authorize the user to access SAS Visual Analytics. This authentication domain is in addition to the default authentication domain.

To authorize a user to access SAS Visual Analytics:

- 1 Log on to SAS Management Console as an administrative user (sasadm) or as a user who provides authorization.
- 2 On the **Plug-ins** tab, select **SAS Management Console** ► **Environment Management** ► **User Manager**.
- 3 Right-click on one of the SAS Forecast Analyst Workbench users, and select **Properties**. The Properties dialog box appears.
- 4 On the **Accounts** tab, click **New**. The New Login Properties dialog box appears.
- 5 Enter all appropriate information. In the **Authentication Domain** field, enter the authentication domain that was created while deploying SAS Forecast Analyst Workbench and SAS Visual Analytics.
- 6 Click **OK** to close the **New Login Properties** dialog box, and click **OK** again.

Capabilities in SAS Forecast Analyst Workbench

View and Assign Capabilities

Capabilities in SAS Forecast Analyst Workbench are arranged in the following categories: planning, modeling, collaboration, administrative, and other. Depending on the role of the user in your organization, you can assign capabilities to that user. For example, if a user is a planner in your organization, you can assign planning capabilities. You can also assign capabilities to a group so that all users in that group share the same capabilities.




To view the capabilities:


- 1 Log on to SAS Management Console as an administrative user (sasadm) or as a user who has the capability to view roles.
- 2 On the **Plug-ins** tab, select **SAS Management Console** ► **Environment Management** ► **User Manager**.
- 3 Right-click on one of the SAS Forecast Analyst Workbench roles, and select **Properties**. The Properties dialog box appears.
- 4 Click the **Capabilities** tab.
- 5 On the **Capabilities** tab, expand **Forecast Analyst 5.2**. The planning, modeling, collaboration, administrative, and other capabilities appear. Select the capabilities for the role according to your business requirements.

Planning Capabilities

Planning capabilities enable a user to perform the organizational planning activities in SAS Forecast Analyst Workbench. A user can create, edit, delete, and copy a forecast plan. The following table describes the planning capabilities.

Table 5.1 Planning Capabilities





Capability	Description	User Interface Impact
Create Forecast	Enables a user to create a forecast and to specify the scope of the forecasting activity.	The  button is visible in the Forecasts category of the Forecast Plans workspace.
Edit Forecast	Enables a user to modify the forecast.	The  button is visible in the Forecasts category of the Forecast Plans workspace.
Delete Forecast	Enables a user to delete a forecast.	The  button is visible in the Forecasts category of the Forecast Plans workspace.

Capability	Description	User Interface Impact
Copy Forecast	Enables a user to copy the forecast.	The  button is visible in the Forecasts category of the Forecast Plans workspace.

Modeling Capabilities

Modeling capabilities enable a user to generate forecast values and to perform tasks related to model management. The following table describes the modeling capabilities.






Table 5.2 Modeling Capabilities

Capability	Description	User Interface Impact
Edit Parameters	Enables a user to edit parameters for the entire forecast, for a time series, or for selected forecast-leaf-level time series.	The  button, and the Edit parameters for plan and Edit parameters of the time series links are visible in the Model Management view.
Diagnose Forecast	Enables a user to diagnose a forecast and generate the predicted values.	The  is visible on the toolbar of the Forecasts category. The Diagnose or Re-Diagnose button is visible in the Model Management view.
Accept Forecast	Enables a user to accept the forecast when the predicted values are satisfactory.	The Accept button is visible in the Model Management view.
Forecast Studio Integration	Enables a user to analyze a forecast in SAS Forecast Studio.	The  button is visible in the Model Management view and in the Modeling category.
Re-Run Forecast	Enables a user to rerun a forecast for a time series or for the selected forecast-leaf-level time series.	The  button is visible in the Model Management view.
Reconcile	Enables a user to reconcile the predicted values of a forecast.	The Reconcile button is visible in the Model Management view.
Scenario Analysis	Enables a user to perform scenario analysis by using the forecasted values.	The Scenario tab is enabled in the Model Management view.

Collaboration Capabilities

Collaboration capabilities enable a user to perform the tasks that are related to collaboration planning. The following table describes the collaboration capabilities.




Table 5.3 Collaboration Capabilities

Capability	Description	User Interface Impact
Create Plan	Enables a user to create a plan for performing collaboration planning.	The  button is visible in the Collaboration category.
Delete Plan	Enables a user to delete a plan.	The  button is visible in the Collaboration category.
Open Collaboration Flow	Enables a user to open the Collaboration Flow view in the Collaboration category.	The  button is visible in the Collaboration category.
Open Explore Demand	Enables a user to open the Explore Demand view and analyze the demand of a plan.	After a user double-clicks a plan, the Explore Demand view is available in the Collaboration category.
Refresh Plan Data	Enables a user to refresh a plan in order to obtain the latest incremental data.	The  button is visible in the Collaboration category.
Collaboration	Enables a user to perform collaboration planning by using the forecasted values.	The Collaboration category is visible in the Forecast Plans workspace.
Edit Plan	Enables a user to edit the plan in order to modify its parameters.	The  button is visible in the Collaboration category.

Other Capabilities

Other capabilities enable a user to perform tasks within SAS Forecast Analyst Workbench that are related to analyzing the forecast values. The following table describes the other capabilities.

Table 5.4 Other Capabilities

Capability	Description	User Interface Impact
New Product Forecasting, Create Project	Enables a user to create a forecast project for a new product and to forecast the possible future values for that new product.	The  and  buttons are visible in the New Products workspace.
New Product Forecasting, Assign Project to Forecast	Enables a user to assign the new product forecast project to a forecast.	The  button is visible in the New Products workspace.

Capability	Description	User Interface Impact
View Comments Manager	Enables a user to view and add comments about a forecast.	The Comments Manager pane is visible in the Forecasts category and the Modeling category of the Forecast Plans workspace.
Edit Batch Run Details	Enables a user to schedule a forecast to run periodically in batch mode.	The fields and options in the Batch Run Details pane are enabled in the Forecasts category of the Forecast Plans workspace.
View Reports Workspace	Enables a user to open a report in SAS Visual Analytics or SAS Web Report Studio from the Reports workspace.	The Reports workspace is visible.
View Administration Workspace	Enables a user to view the Administration workspace and perform tasks related to product succession.	The Administration workspace is visible.

Administrative Capabilities

Administrative capabilities enable a user to manage the life cycles of products. The following table describes the administrative capabilities.

Table 5.5 Administrative Capabilities

Capability	Description	User Interface Impact
Search Products for Product Lifecycle	Enables a user to search for a product across multiple products in Administration workspace.	The Search and Advanced Search dialog boxes are visible in the Administration workspace.
Edit Product Lifecycle for Single Product	Enables a user to edit the life cycle of a product.	After a user double-clicks a product, the Product Life Cycle view is visible in the Administration workspace.
Edit Product Lifecycle for Multiple Products	Enables a user to manage the life cycles of multiple products simultaneously.	The Product Mass Change Window is visible in the Administration workspace.

Configuring SAS Forecast Analyst Workbench Parameters

Configure Parameters

SAS Forecast Analyst Workbench enables you to configure parameters related to ETL, SAS Forecast Studio, and SAS Financial Management. You should configure these parameters once to meet your business requirements. The ETL and all analytical processes use these parameters for the following purposes:

- extracting data from the solution data layer (SDL) correctly
- acquiring correct paths for integration with SAS Forecast Studio, SAS Inventory Optimization Workbench, and SAS Financial Management
- improving performance


You must configure these parameters before you start any SAS Forecast Analyst Workbench processes.

To configure the parameters:

- 1 Open SAS Management Console as an unrestricted administrator (sasadm) or as a user who has the capability to configure the parameters.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Configuration Manager** ► **Forecast Analyst Config 5.2**.
- 3 Right-click **Forecast Analyst Config 5.2**, and click **Properties**. The Forecast Analyst Config 5.2 Properties dialog box appears.
- 4 Click the **Advanced** tab and configure the parameters by entering information in the **Property Value** column.

Note: The properties have default values. You can change these values if the default values are not suitable for your environment.

Figure 5.1 Configuration Parameters

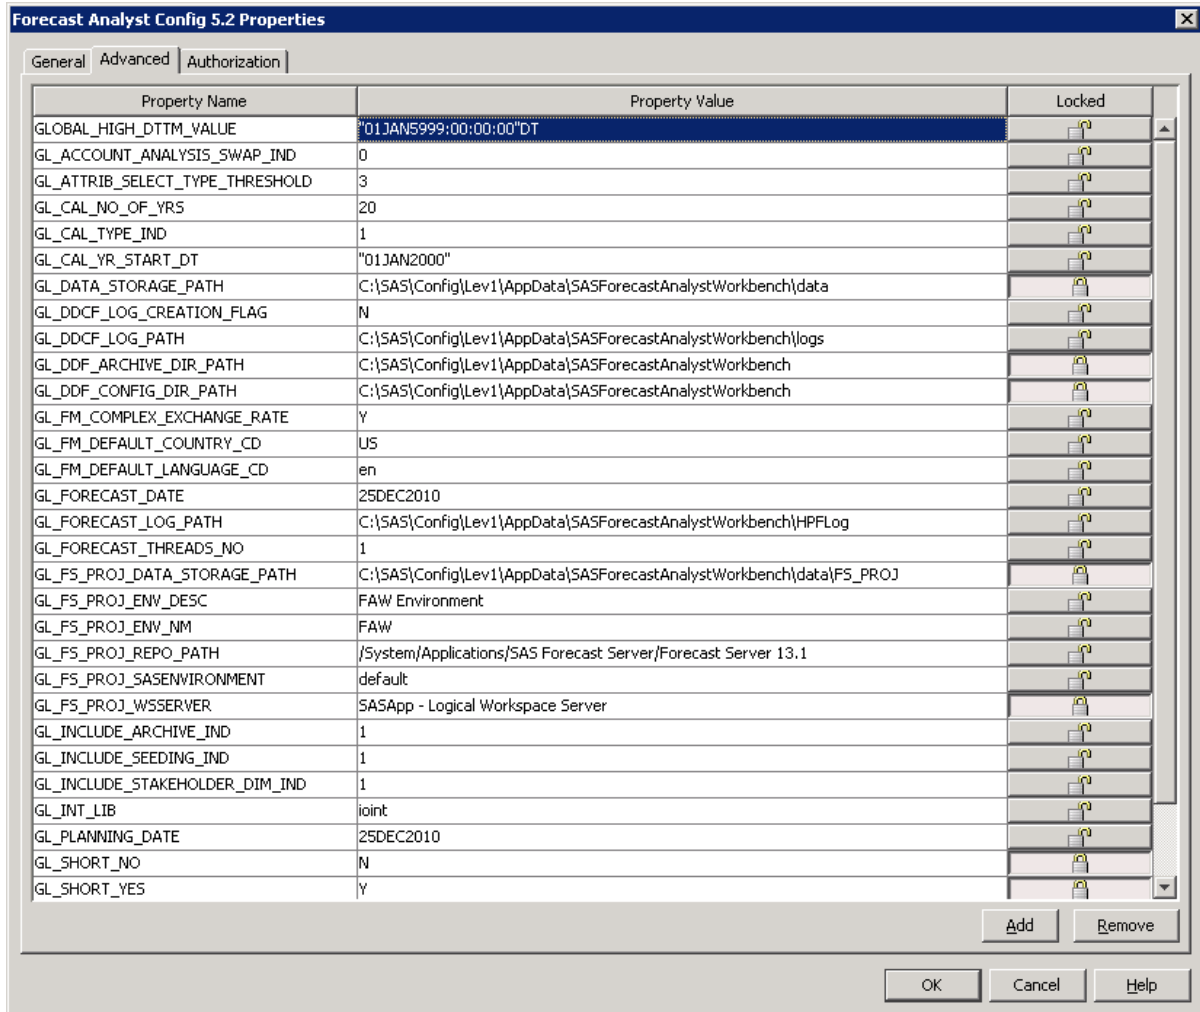

For more information about configuration parameters, see “About the Configuration Parameters” on page 31.

5 Click **OK**.

The configuration parameters are defined.

About the Configuration Parameters

The following table describes each configuration parameter and provides an example value.

Table 5.6 Configuration Parameters

Parameter	Description	Example of the Parameter Value
GLOBAL_HIGH_DTTM_VALUE	Specifies a globally conventional high date (datetime format) to identify valid records	01JAN5999:00:00:00"DT

Parameter	Description	Example of the Parameter Value
GL_ACCOUNT_ANALYSIS_SWAP_IND	Specifies whether to swap the account variable and the analysis variable in planning. The value 1 indicates to swap the analysis and account variables. The value 0 indicates not to swap.	0
GL_ATTRIB_SELECT_TYPE_THRESHOLD	Specifies the maximum number of attribute values to be displayed as a list in the user interface. If the number of values is greater than this number, the values are displayed in a range filter.	3
GL_CAL_NO_OF_YRS	Specifies the number of years for which the calendar should be generated. Note: Do not change this parameter after you have initially generated the calendar. If you specify a different value after the calendar is used in a forecast, the forecasts and plans that use the existing calendar might not work.	20
GL_CAL_TYPE_IND	Specifies the type of calendar to be generated for the forecasting process. The value 0 indicates to use a custom calendar. The value 1 indicates to use the Gregorian calendar. Note: Do not change this parameter after you have initially generated the calendar. If you specify a different value after the calendar is generated, the forecasts and plans that use the existing calendar might not work.	1
GL_CAL_YR_START_DT	Specifies the starting date for the calendar. The format of the date must be 01JAN2013. Note: Do not change this parameter after you have initially generated the calendar. If you specify a different value after the calendar is generated, the forecasts and plans that use the existing calendar might not work.	"01JAN2000"
GL_FAW_LASRLIBNAME	Specifies the name of the library on the SAS LASR Analytic Server from which data is uploaded to SAS Visual Analytics.	SAS Visual Analytics LASR
GL_DATA_STORAGE_PATH	Displays the path in the environment in which all the hierarchical forecasting data sets are created. This path includes actual and predicted results, along with model repositories and events data.	C:\SAS\Config\Lev1\AppData\SASForecastAnalystWorkbench\data
GL_DDCF_LOG_CREATION_FLAG	Specifies whether logs should be created at the location that is specified by the GL_FORECAST_LOG_PATH and GL_DDCF_LOG_PATH parameters. The possible values of this parameter are specified by the GL_SHORT_YES and GL_SHORT_NO parameters.	N
GL_DDCF_LOG_PATH	Displays the path in the environment in which all logs that are specific to collaboration process and SAS Forecast Analyst Workbench ETL jobs are created.	C:\SAS\Config\Lev1\AppData\SASForecastAnalystWorkbench\logs
GL_DDF_ARCHIVE_DIR_PATH	Displays the path in which the archive tables should be created and data should be archived.	C:\SASForecastAnalystWorkbench

Parameter	Description	Example of the Parameter Value
GL_DDF_CONFIG_DIR_PATH	Displays the solution configuration directory for SAS Forecast Analyst Workbench.	C:\SAS\Config\Lev1\AppData\SASForecastAnalystWorkbench
GL_FAW_BL_PSQL_PATH	Specifies the full path to the PSQL executable file of the PostgreSQL database. This file lets the SAS/ACCESS interface call the PostgreSQL PSQL utility.	C:\Program Files\SASHome\SASWebInfrastructurePlatformDataServer\9.4\bin\psql.exe
GL_FM_COMPLEX_EXCHANGE_RATE	Specifies the complex exchange rate selection for SAS Financial Management. This parameter is kept for future use.	Y
GL_FM_DEFAULT_COUNTRY_CD	Specifies the default country code for SAS Financial Management.	US
GL_FM_DEFAULT_LANGUAGE_CD	Specifies the default language code for SAS Financial Management.	en
GL_FM_FACT_LOAD_SOURCE_IND	Specifies whether the data is to be loaded to the Base member or to the BaseForm member of a source dimension of SAS Financial Management. The value 0 indicates that the data is loaded to the BaseForm member of a source dimension. The value 1 indicates that the data is loaded to the Base member of a source dimension.	0
GL_FORECAST_DATE	Specifies a date to be used as the forecast date. The forecast starts from the date that you specify. The default value of this parameter is the current date. However, you can provide a specific date (for example, 01JAN2011).	today()
GL_FORECAST_LOG_PATH	Displays the path in which logs should be generated.	C:\SAS\Config\Lev1\AppData\SASForecastAnalystWorkbench\HPFLog\
GL_FORECAST_THREADS_NO	Specifies the number of threads (sessions) to be created for forecasting. This value is used for processing forecast data sets or time series in parallel.	1
GL_FS_PROJ_DATA_STORAGE_PATH	Displays the path in the environment in which all the data sets that are related to modeling project are created. You cannot modify the value of this parameter.	C:\SAS\Config\Lev1\AppData\SASForecastAnalystWorkbench\data\fs_proj
GL_FS_PROJ_ENV_DESC	Specifies the description to be assigned to the SAS Forecast Studio environment that is specified by the GL_FS_PROJ_ENV_NM parameter.	FAW Environment
GL_FS_PROJ_ENV_NM	Specifies the name of the SAS Forecast Studio environment to be created.	FAW

Parameter	Description	Example of the Parameter Value
GL_FS_PROJ_REPO_PATH	Specifies an absolute path, written in UNIX format, for the Base SAS Folder in the metadata.	/System/Applications/SAS Forecast Server/Forecast Server 13.2
GL_FS_PROJ_SASENVIRONMENT	Displays the name of the SAS environment that contains the SAS Forecast Server middle tier. This value is case sensitive.	default
GL_FS_PROJ_WSSERVER	Displays the name of the logical workspace server that is used to create the modeling projects. This parameter is used when environments are created for networked middle-tier servers in SAS Forecast Studio.	SASApp - Logical Workspace Server
GL_INCLUDE_ARCHIVE_IND	Specifies whether to include the archive functionality. The values are 0 or 1. The value 1 indicates to use archive functionality and the value 0 indicates that archiving should not be used.	1
GL_INCLUDE_SEEDING_IND	Specifies whether seeding should be done. The values are 1 or 0. The value 1 indicates that seeding is enabled and the value 0 indicates that seeding is disabled.	1
GL_INCLUDE_STAKEHOLDER_DIM_IND	Specifies whether the stakeholder dimension should be added while the collaboration planning process is initiating. Values are 1 and 0. The value 1 indicates to include the stakeholder dimension. The value 0 indicates not to include the stakeholder dimension. The default value is 1.	1
GL_INT_LIB	Specifies the SAS library reference in which the input data set from other applications, such as SAS Inventory Optimization Workbench, and the related configuration tables are made available.	joint
GL_PLANNING_DATE	Specifies the date to be used as the planning date. The default value of this parameter is the current date. However, you can provide a specific date, such as 01JAN2011.	today()
GL_SHORT_NO	Specifies a short value for indicating NO.	N
GL_SHORT_YES	Specifies a short value for indicating YES.	Y
GL_SOURCE_SYSTEM_CD	Specifies the source system code, which is used as input to the SAS Financial Management services.	ETL
GL_START_DAY_OF_WEEK	Specifies the start day of the week. SAS Forecast Analyst Workbench does not currently use this parameter.	1
GL_TIMESERIES_DIV_NUM	Specifies the number of time series to be considered at one time for forecasting.	100

Running ETL Jobs

After you define the configuration parameters to meet your business requirements, you can run the ETL jobs in order to load the data to solution database. The ETL jobs are located in SAS Data integration Studio. The ETL jobs include the jobs that are related to SAS Forecast Analyst Workbench, SAS Financial Management, customizing SAS Forecast Analyst Workbench, and so on.

For more information about running the ETL jobs, see [“Overview of ETL Jobs” on page 51](#).

Authorizing Users to Access Data

Overview of Authorizing Users

You can authorize a user or group of users and assign permissions to users to access data. Based on your business requirements, you can assign different levels of access to different users or groups of users. For example, you can give User A access to data that is related to Products X and Y and you can give User B access to data that is related to Products V, W, and X.

You use SAS Management Console to provide users with access to data. You can set authorizations after you run the ETL jobs. You might want to authorize users under the following conditions:

- a new user is added to the environment
- new data (for example, a new product or store location) is added to the dimension and you want to assign permissions
- you want to change the permissions that are already assigned to an existing user


Make a User or Group Solution Authorized

After you have run the ETL jobs, you can make a user or group solution authorized.

To make the user or group solution authorized:

- 1 Log on to SAS Management Console as an unrestricted administrator (sasadm) or as a user who has the capability to authorize permissions.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Data Authorization**. The Select Software Component to Connect dialog box appears.

Figure 5.2 Select Software Component to Connect Dialog Box

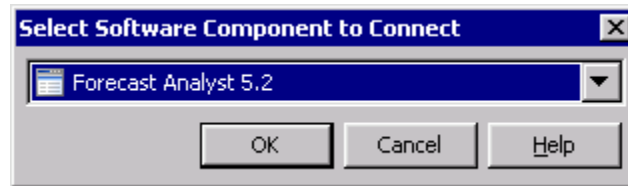

- 3 Select **Forecast Analyst 5.2**, and then click **OK**.
- 4 In the **Data Authorization** node of the **Plug-ins** tab, select a user or group of users that is SAS authorized.
- 5 Right-click the user or group, and select **Add to Solution Authorization**.

The **Solution Authorized** column displays **Yes** for the user. That user or group is authorized to access the solution.


Assign Permissions to a User or Group to Access Data

After you have run the initial and ongoing jobs, you can assign permissions to a user or group to access the data.

To assign permissions to a user or group to access data:

- 1 Log on to SAS Management Console as an unrestricted user (sasadm) or as a user who has the capability to authorize to the data.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Data Authorization**. The Select Software Component to Connect dialog box appears.
- 3 Select **Forecast Analyst 5.2**, and then click **OK**.
- 4 In the **Data Authorization** node, select a user or group that is solution authorized.
- 5 Right-click the user or group, and select **Update Permissions**. The Update Permissions dialog box appears.

Figure 5.3 Update Permissions Dialog Box

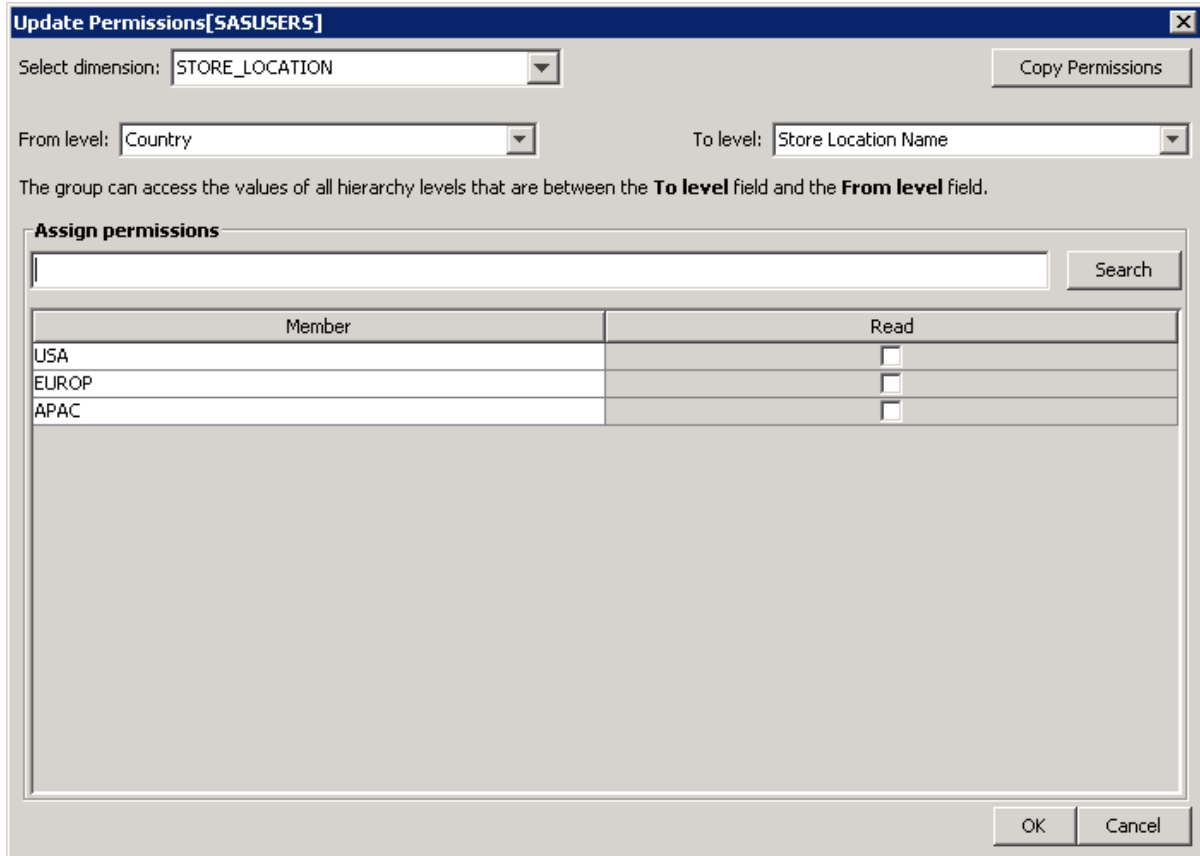

- 6 Enter the appropriate information in the Update Permissions dialog box. The following table describes the fields in the Update Permissions dialog box.

Table 5.7 Fields in the Update Permissions Dialog Box

Field	Description
Select dimension	Select a dimension from the list (for example, PRODUCT).
From level	Select the hierarchy level at which you want to begin to give permission to the user. For example, select Segment . Note: This list is available only when you select a dimension that contains hierarchical data.
To level	Select the lowest level of the hierarchy for which you want to provide permission to the user (for example, Product name). The user or group can access all hierarchy levels from the level that you specified in the From level field through the level that you selected in the To level field. Note: This list is available only when you select a dimension that contains hierarchical data. Note: If the user will perform product succession, you must provide access to the lowest-level data (leaf-level data) for all dimensions to that user.

Field	Description
Copy Permissions	Click this button to copy permissions from another user. When you click this button, the Copy Permissions dialog box appears. Select a user whose permissions you want to copy and click OK .
Search	Enter a member of the hierarchy level or the value of the hierarchy level, and click Search . The Update Permissions dialog box displays the members or values that satisfy the search criteria.
Member	Displays the name of the hierarchy value or the name of the member, based on the From level value that you selected.
Read	Select this check box to permit the user or group to access the hierarchy level.

Note: In order to work on New Product Forecast projects, the user must have permission for at least one value for each dimension.

7 Click **OK**.

The **Permissions** column displays **Yes**. The selected user or group is permitted to access the selected data.

Assigning Permissions to a User or Group for a Forecast, for a Modeling Project, or for a Plan

Users in SAS Forecast Analyst Workbench cannot access forecasts, modeling projects, or collaboration plans that are created by other users. You must provide permissions to the user for the forecasts, modeling projects, or plans created by another user. For example, you can assign permissions to User B (who is a forecast analyst) for a plan that User A (who is a planner) creates so that User A can perform model-management tasks.

Whenever a forecast, modeling project, or plan is created, a smart object for that forecast, modeling project, or plan is created in SAS Management Console. You should provide permission to the user on the smart object that is created in SAS Management Console.

To assign a user permissions to access a forecast, modeling project, or plan that another user created:

- 1 Log on to SAS Management Console as an unrestricted administrator or as a user who has the capability to assign permissions.
- 2 On the **Folders** tab, select **SAS Folders** ► **Products** ► **SAS Forecast Analyst Workbench** ► **5.2 Smart Objects**.

The **5.2 Smart Objects** folder contains three folders: the **ForecastPlan** folder contains the smart objects that are created for forecasts; the **ForecastStudioProject** folder contains the smart objects that are created for modeling projects; and the **ConsensusPlan** folder contains the smart objects that are created for plans.

- 3 Perform one of the following steps:

- If you want to assign permissions for a forecast, select the smart object for the plan in the **ForecastPlan** folder, right-click the object, and select **Properties**. The Properties dialog box appears.
 - If you want to assign permissions for a modeling project, select the smart object for the modeling project in the **ForecastStudioProject** folder, right-click the object, and select **Properties**. The Properties dialog box appears.
 - If you want to assign permissions for a plan, select the smart object for the plan in the **ConsensusPlan** folder, right-click the object, and select **Properties**. The Properties dialog box appears.
- 4 In the Properties dialog box, click the **Authorization** tab.
 - 5 Click **Add**. The **Add Users and Groups** dialog box appears.
 - 6 Select the user, and click **OK**. The user is added to the **Authorization** tab.
 - 7 On the **Authorization** tab, select the user, and grant permissions.
 - 8 Click **OK**.

Performing Miscellaneous Tasks

Change the Log Level for Web Application Server

Change the log level for the web application server to get better insights into the issues that you might be experiencing on web application server.

To change the log level for web application server:

- 1 On the web application server, open the following location: *SAS-configuration-directory*\Lev1\Web\Common\LogConfig
- 2 In the LogConfig directory, right-click the **SASForecastAnalystWorkbench-log4j.xml** file, point to **Open with**, and select **Notepad** to edit the file.
- 3 Change the priority value to the required level.
Use the priority value DEBUG for obtaining a detailed log, and use ERROR to obtain error messages.
- 4 Save the file.

Verify the Default Path of Log Files

SAS Forecast Analyst Workbench generates different log files. You can view the log files to obtain detailed information about the tasks that you have performed. SAS Forecast Analyst Workbench creates the following log files:

- SAS Forecast Analyst Workbench log file, which is located at *SAS-configuration-directory/*

`Levn/Web/Logs/SASServer8_1/SASForecastAnalystWorkbench5.2.log`

Note: If you deployed SAS Forecast Analyst Workbench in a multi-machine environment, this log file is created on the middle-tier machine.

- Stored Process logs are stored at `SAS-configuration-directory/Levn/SASApp/StoredProcessServer/Logs`

Note: If you deployed SAS Forecast Analyst Workbench in a multi-machine environment, these logs are stored on the server-tier machine.

- The logs that are created for SAS Financial Management processes that are run through SAS Forecast Analyst Workbench are stored in the path that you specified in the `GL_DDF_CONFIG_DIR_PATH` parameter. In order to use the path that is specified in the `GL_DDF_CONFIG_DIR_PATH` parameter, ensure that the `GL_DDCF_LOG_CREATION_FLAG` parameter contains the `y` parameter value.
- The forecasting-related logs are stored in the path that you specified in the `GL_FORECAST_LOG_PATH` parameter.

SAS Forecast Analyst Workbench stores the forecasting-related logs if the `GL_DDCF_LOG_CREATION_FLAG` path is set to `y`.

Update the Number of Time Series That Are Shown in the Model Management View

When a forecast contains a large number of time series, you can restrict the number of time series that are shown in the Model Management view in the user interface. By restricting the number of time series in the Model Management view, users work with only those time series that require their attention. You can update the value immediately after you deploy SAS Forecast Analyst Workbench.

To update the number of time series that are shown in the Model Management view:

- 1 Log on to SAS Management Console as an unrestricted administrator (sasadm) or as a user who has the capability to specify the time series.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Configuration Manager** ► **SAS Application Infrastructure** ► **Forecast Analyst 5.2**.
- 3 Right-click the Forecast Analyst 5.2 node, and select **Properties**. The Forecast Analyst 5.2 Properties dialog box appears.
- 4 Click the **Advanced** tab, and update a value in the `MODEL_MANAGEMENT_FETCH_DATA_LIMIT` parameter.

Note: Do not increase the value of the `MODEL_MANAGEMENT_FETCH_DATA_LIMIT` parameter beyond 5000 time series.
- 5 Click **OK**.

After you update the value for `MODEL_MANAGEMENT_FETCH_DATA_LIMIT` parameter, restart the `SASServer8` and Object Spawner in order to reflect the changes.

Disable the SAS Visual Analytics Hub

After you deploy SAS Forecast Analyst Workbench, the SAS Visual Analytics Hub is also installed and deployed by default. However, you can disable SAS Visual Analytics Hub.

To disable SAS Visual Analytics Hub:

- 1 Log on to SAS Management Console as an unrestricted administrator (sasadm) or as a user who has the capability to disable SAS Visual Analytics Hub.
- 2 On the **Plug-ins** tab, select **Application Management** ► **Configuration Manager** ► **SAS Application Infrastructure** ► **Forecast Analyst 5.2**.
- 3 Right-click the Forecast Analyst 5.2 node, and select **Properties**. The Forecast Analyst 5.2 Properties dialog box appears.
- 4 Click the **Advanced** tab, and set ENABLE_APPLICATION_SWITCHER parameter to 0.
- 5 Click **OK**.
- 6 Stop SASServer 12.
- 7 Restart SASServer 8 for the changes to take effect.

Allocate Required Space for a Java Virtual Machine

When you are integrating SAS Financial Management with SAS Forecast Analyst Workbench for performing collaboration, you might need to allocate additional space for its Java virtual machines (JVM). By allocating necessary space to the appropriate JVMs, you ensure that the data is loaded smoothly and quickly to SAS Financial Management. If sufficient space is not available to the JVM, the faw_0605_load_fm_sdm_dimensions job might fail.

For information about allocating the needed space for a JVM, see *SAS Financial Management: Performance Guide* at <http://support.sas.com/documentation/solutions/performmanagement/fm/5.4/fmsprfg.pdf>.

Specify Automatic Sending of Emails

You can specify that an automatic email should be sent to stakeholders when forms are published. In order to send an automated email, you must ensure that the email addresses for stakeholders are specified in SAS Management Console.

To specify this setting:

- 1 Log on to SAS Management Console as an unrestricted administrator (sasadm) or as a user who has the capability to specify the email settings.
- 2 On the **Plug-ins** tab, select **SAS Management Console** ► **Application Management** ► **Configuration Manager** ► **SAS Application Infrastructure**.

- 3 Right-click **SAS Application Infrastructure** and select **Properties**. The SAS Application Infrastructure Properties dialog box appears.
- 4 Click **Settings**.
- 5 On the **Settings** tab, click **Notifications**. The **Notifications > General Configuration** settings appear.
- 6 In the **Notifications > General Configuration** section, select **E-mail** as the alert notifications type.
- 7 Click the **Advanced** tab, and specify the correct values for **Email.Host** and **Email.Port**.
- 8 Click **OK**.

Set Up the Environment for SAS Forecast Studio on UNIX

When you are deploying SAS Forecast Studio, you must specify a umask setting of 002. If you do not specify 002, then you must provide permission 775 to the *SAS-configuration-directory*\Levn\AppData\SASForecastServer13.2 folder. For more information, see *SAS Forecast Server: Administrator's Guide* at <http://support.sas.com/documentation/solutions/forecast/index.html>.

Limit the Reach of SAS Server Processes

You can limit the reach and activities of a SAS server by putting it in a locked-down state. The lockdown feature is not supported by SAS Forecast Analyst Workbench. For more information, see *SAS Intelligence Platform: Security Administration Guide* at <http://support.sas.com/documentation/cdl/en/bisecag/67045/PDF/default/bisecag.pdf>.

Set Up Digital Certificates on a Secured Environment

You might need to set up digital certificates on a secured environment so that SAS Forecast Analyst Workbench works smoothly. You can set up the SAS root certification authority to the trusted root certification authority.

To set up digital certificates on a secured environment, see "TLS on UNIX: System and Software Requirements" in *Encryption in SAS* at <http://support.sas.com/documentation/cdl/en/secref/66817/HTML/default/viewer.htm#p19ae3tesuws2xn17rnosoureihs.htm>.

Part 3

Data Management

<i>Chapter 6</i>		
	<i>Flow of Data in SAS Forecast Analyst Workbench</i>	45
<i>Chapter 7</i>		
	<i>ETL Tasks</i>	51
<i>Chapter 8</i>		
	<i>SAS Forecast Analyst Workbench Configuration Tables</i>	63
<i>Chapter 9</i>		
	<i>Integrating SAS Forecast Analyst Workbench with SAS Financial Management</i>	91
<i>Chapter 10</i>		
	<i>Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics</i>	105
<i>Chapter 11</i>		
	<i>Integrating SAS Forecast Analyst Workbench with Another SAS Solution</i>	117

6


Flow of Data in SAS Forecast Analyst Workbench

<i>Loading and Accessing Data</i>	45
<i>Configuring Data for SAS Forecast Analyst Workbench</i>	47
<i>Libraries In SAS Forecast Analyst Workbench</i>	49

Loading and Accessing Data

The data moves from its source, through the staging area, to the solution data layer, to the user interface analytical result tables (UIART). This section describes the flow of the data throughout the SAS Forecast Analyst Workbench environment. The following figure shows the data flow.

Figure 6.1 Data Flow Diagram

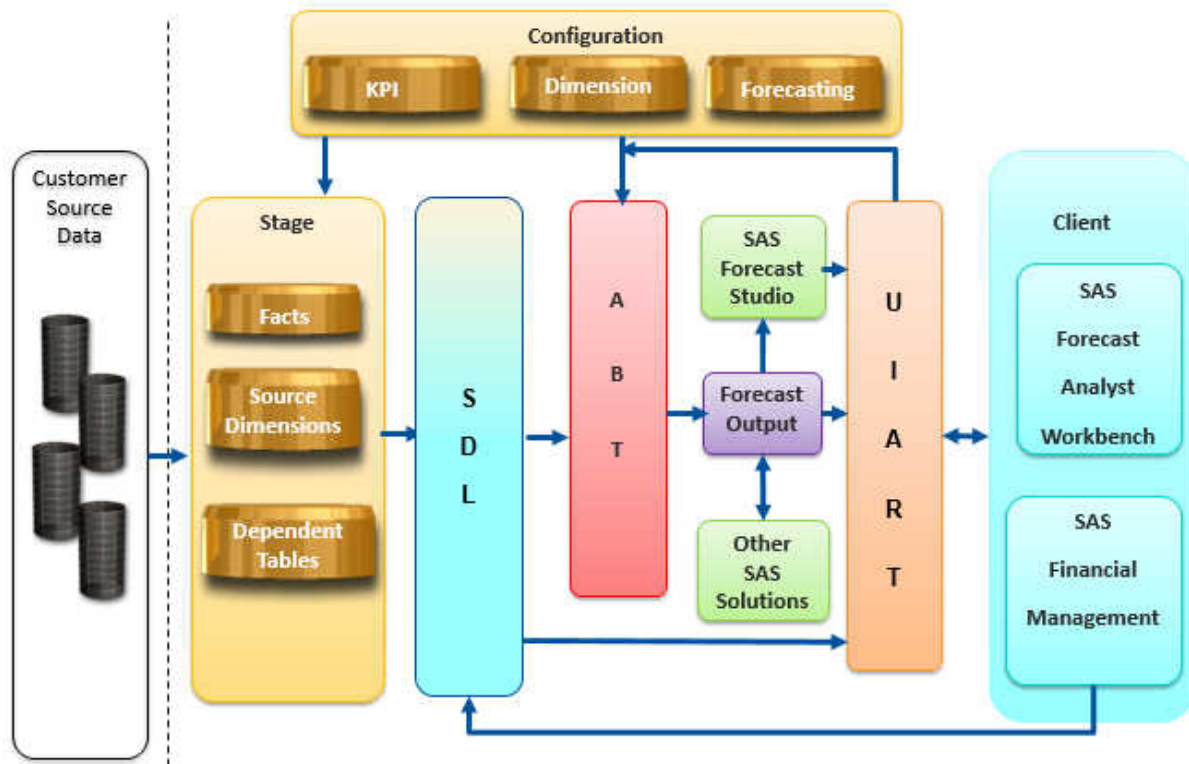

The complete path that the data follows consists of the following main steps:

- 1 Extract the data from your source systems and load it into the staging area and then to solution data layer. In order to load the data into the stage area, perform the following tasks:
 - a As an administrator, after you deploy SAS Forecast Analyst Workbench and enter information in the configuration parameters, run the configuration jobs. The configuration jobs create the configuration tables.
 - b Enter information in the configuration tables to meet your business requirements and data availability.
 - c After you update the configuration tables, run the initial jobs. The initial jobs use the information that you entered in the configuration tables to create the stage tables and the solution data layer tables. You must map the stage tables with your source system tables and load the data.

You must update the stage tables whenever the source system is updated or refreshed.

For more information about running configuration jobs, see [“Running Configuration Jobs”](#) on page 54.

For more information about running initial jobs, see [“Running Initial Jobs”](#) on page 55.

For more information about loading information into the stage area, see [“Loading Data into the Stage Area”](#) on page 57.

- 2 Run the ongoing ETL jobs to perform the following tasks:

- load dimension tables with the latest data from the stage tables
- load user interface analytical result tables (UIART) with the latest data from the solution data layer

Whenever stage tables are refreshed or updated, update the solution data layer (SDL) tables, dimension tables, and UIART by running the ongoing jobs. After the dimension tables and the UIART are loaded, the user interface for SAS Forecast Analyst Workbench is ready to use.

For more information about running the ongoing jobs, see [“Running Ongoing Jobs” on page 60](#).

- 3 Use SAS Forecast Analyst Workbench to create forecasts, diagnose them, and perform the activities related to forecasting and planning. The following list explains how the data flows through SAS Forecast Analyst Workbench when you are working in the user interface:
 - When you create forecasts, SAS Forecast Analyst Workbench extracts data from the SDL and configuration libraries, and loads it in the analytical base tables (ABTs). SAS Forecast Analyst Workbench also creates forecast-specific folders in the path that you specify in the configuration parameters. The data that is related to the forecast is loaded in these folders.

For more information about the configuration parameters, see [“About the Configuration Parameters” on page 31](#).

- When you diagnose forecasts, SAS Forecast Analyst Workbench sends the data to high-performance forecasting processes, and then loads the forecasted data into the forecasting tables
- When you integrate the forecasts with SAS Forecast Studio, the data is provided to SAS Forecast Studio and the output is loaded into the library that you specified in the configuration parameters

For more information about the configuration parameters, see [“About the Configuration Parameters” on page 31](#).

- When you integrate the plans with SAS Financial Management, the plan-level data is loaded in SAS Financial Management to use for performing collaboration planning.

SAS Forecast Analyst Workbench can be integrated with other SAS solutions, such as SAS Inventory Optimization Workbench, and so on.

Configuring Data for SAS Forecast Analyst Workbench

SAS Forecast Analyst Workbench enables you to customize your deployment, based on your business requirement. You can customize the deployment of SAS Forecast Analyst Workbench in the following ways:

- add a custom calendar for collaboration

By adding a custom calendar for collaboration, you can perform forecasting using a Gregorian calendar but perform collaboration using a custom calendar. This capability is useful when the financial year is different from the

forecasting calendar and you want to perform collaboration planning based on the financial year.

- add an alternate hierarchy for collaboration

When you want to perform the collaboration on a hierarchy that is different from the default one, add an alternate hierarchy to an existing dimension. For example, suppose the PRODUCT dimension contains the default hierarchy as category, sub-category, and product name. To get a broad idea of demand and to perform collaboration, you can choose segment, class, and product name.

- extract the data of all stakeholders of a plan

When you are performing collaboration through SAS Forecast Analyst Workbench, you can extract the data of only the default stakeholder. When you want to perform the analysis on the data of all stakeholders, you can extract the data and analyze it in SAS Visual Analytics.

- add a dimension to an existing plan

You can add a dimension to an existing plan when you want to perform the collaboration on an additional dimension. For example, suppose plan ABC contains PRODUCT and CUSTOMER dimensions, and you have performed collaboration planning. Later, you can add another dimension, QUALITY, in order to plan ABC to rate the inputs that you obtained during collaboration.

You must plan for the dimension that you want to use as an additional dimension while you are configuring SAS Forecast Analyst Workbench.

- perform multi-tier causal analysis

By using multi-tier causal analysis, you can link a series of quantitative methods together to measure the impact of sales and marketing strategies on the consumer demand. Then, using the coefficients of the demand model, multi-tier causal analysis executes what-if scenarios to shape and predict the demand. Finally, demand and supply are linked using analytics rather than by using just judgment.

In order to perform multi-tier causal analysis, you must plan the independent variable that you want to use as a KPI while you are configuring SAS Forecast Analyst Workbench.

- use a custom model

You can write the code for additional models that you want to use for forecasting the demand for new products.

- archive data for reporting

You can archive the output data of a forecast and a plan for reporting. The sales and operations planning processes can use this data for additional analysis.

- seed analysis variables

You can cohesively consider all the business requirements and customizations that are available, and then configure the data accordingly so that you can use SAS Forecast Analyst Workbench seamlessly. For more information, see the appendixes in this document.

Libraries In SAS Forecast Analyst Workbench

SAS Forecast Analyst Workbench organizes the files in different libraries according to the subject areas that they belong to. SAS Forecast Analyst Workbench contains the following libraries:

FAW Analytical Base Tables

contains tables that are created in the form that is required for high-performance forecasting-based procedures. These tables are created by transforming, filtering, and aggregating the data that is present in the solution data layer tables. The ABTs are used as input to the analytical procedures.

FAW Configuration Tables

contains tables that consist of configuration-related information. Update the configuration tables with your business-specific information.

FAW Staging Data Layer Tables

contains dimension tables, dimension-dependent tables, and fact data tables. These tables need to be loaded with business-specific source system data.

FAW Internal Temporary Tables

contains intermediate or temporary tables that are used in various processes.

FAW Solution Data Layer Tables

contains dimension tables, dimension-dependent tables, and facts data tables. These tables are loaded from data that is in the stage tables.

FAW UI Analytical Result Tables (Transaction)

contains application tables consisting of information that is required to display the SAS Forecast Analyst Workbench user interface. These tables reside in a PostgreSQL database.

FAW Analytical Result Tables (SAS)

contains the SAS data set tables that are required to display the SAS Forecast Analyst Workbench user interface.

FAW Custom Model Repository Tables

contains the data tables that are related to modeling projects.

FAW Control Tables

contains tables that consists of control-related information that is used to create ABTs.

FAW Plan Exploration Tables

contains the dimension and fact data tables for each forecast. This information is used to display the KPI values for the dimension that the user selected in the Explore Demand view of the application.

FAW Custom Model Repository Tables

contains user-defined custom models for a catalog. The catalogs are forecast-specific.

FAW New Product Forecasting Tables

contains tables that are specific to forecasting new products.

Visual Analytics Integration Tables

contains tables with data for generating SAS Forecast Analyst Workbench reports in SAS Visual Analytics.

7

ETL Tasks

<i>Overview of ETL Jobs</i>	51
<i>Configuring Parameters</i>	52
<i>Preparing SAS Forecast Analyst Workbench Data</i>	52
Overview of Preparing Data	52
Run Jobs to Load Data	52
<i>Running Configuration Jobs</i>	54
<i>Running Initial Jobs</i>	55
<i>Loading Data into the Stage Area</i>	57
Overview of the Stage Area	57
Structure of the Dimension Tables	58
Table Dependency	59
<i>Running Ongoing Jobs</i>	60
<i>Authorizing Users to Access Data</i>	61

Overview of ETL Jobs

After you complete the post-installation tasks, you can perform the following tasks in order to prepare SAS Forecast Analyst Workbench data:

- 1 run configuration jobs
- 2 update configuration tables
- 3 run initial jobs
- 4 load data from the customer source database into the stage area
- 5 run ongoing jobs
- 6 authorize users to access data

Configuring Parameters

After you install SAS Forecast Analyst Workbench, you must configure the parameters that are related to SAS Forecast Analyst Workbench. Configure these parameters to meet your business requirements.

For more information about configuring parameters, see [“Configuring SAS Forecast Analyst Workbench Parameters”](#) on page 30.

Preparing SAS Forecast Analyst Workbench Data

Overview of Preparing Data

Data in SAS Forecast Analyst Workbench flows from its source (a customer database) to the stage area, and then through the solution data layer (SDL), to a destination data mart called the user interface analytical result tables (UIART).

The sources of the data can be transactional systems or databases that are outside the SAS Forecast Analyst Workbench environment. The table structures in the stage area and in the SDL are created based on the information that you provide in the configuration tables. You must load the data from source system (the customer system) to the stage area and then from the stage area into the SDL. This process is ongoing.

Run Jobs to Load Data

When you are running the ETL jobs, the following prerequisite applies:

- You must be a member of the Forecast Analyst ETL Users group, which was created in metadata during the configuration process.

To prepare the data for SAS Forecast Analyst Workbench:

- 1 Run the configuration jobs that are in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave00 (Configuration)`

You must run the configuration jobs only once immediately after you deploy SAS Forecast Analyst Workbench. The configuration tables (for example, DIM_TABLE_LIST, KPI_CONFIG, or CREATE_EVENT) are created when you run the configuration jobs. After the configuration tables are created, enter information that meets your business requirements in the configuration tables.

For more information about running configuration jobs, see [“Running Configuration Jobs”](#) on page 54.

- 2 Run the initial one-time jobs that are in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave01 (Initial One Time)`.

You must run the initial one-time jobs only once immediately after you deploy SAS Forecast Analyst Workbench and edit the configuration tables. After you run the initial one-time jobs, the following steps are performed:

- a The table structures in the stage area and the SDL, and a few control tables, are created by the initial jobs, based on the information that you entered in the configuration tables.
- b The time period and time dimension data is created, based on the information that is specified by the job parameters. You can modify the job parameters.

SAS Forecast Analyst Workbench creates the Gregorian calendar or custom calendar based on the information that you specified in the configuration parameters.

- c The configuration tables related to the forecast time interval are created.
- d The application configuration tables are created.

For more information about running initial jobs, see [“Running Initial Jobs” on page 55](#).

- 3 Run the ongoing jobs that are in the following directories through SAS Data Integration Studio in order to load data from the stage area to the SDL, and then load the required UIART tables:

- `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave02`

Before you run this job, you must ensure that the customer data is loaded into the stage tables. When you run the `wave02` jobs, SAS Forecast Analyst Workbench loads the data from the stage area to the SDL.

- `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave03`

These jobs populate the data that must be displayed in the user interface, along with the following data, while a user is creating a forecast:

- list of KPIs
- associated dimensions for each KPI
- hierarchy levels, hierarchy values, and attributes that are associated with each dimension
- independent variables and adjustment tables that are associated with each KPI
- events
- product succession information

You must run these jobs whenever new source data is loaded into the stage area.

Each of these steps is described in detail in the following sections. After you have performed all these steps, users can open the user interface of SAS Forecast Analyst Workbench to start forecasting values.

Running Configuration Jobs

The configuration jobs create configuration tables. You must run the configuration jobs that are in SAS Data Integration Studio in the following sequence:

- 1 faw_0001_generate_config_datamart
- 2 faw_0002_populate_dependent_config_tables

The configuration jobs are in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave00 (Configuration)`

After you run the configuration jobs, the configuration tables are created. Before you can run the initial jobs and the ongoing jobs, you must enter the information in the configuration tables to meet your business requirements. The initial jobs and ongoing jobs use the information that you specify in the configuration tables.

The following table describes the configuration jobs in detail.

Table 7.1 Configuration Jobs

Job Name	Job Description	Required Inputs
faw_0001_generate_config_datamart	<p>Creates the following configuration tables in the configuration library. You must provide information in these tables to meet your business requirements.</p> <ul style="list-style-type: none"> ■ DIM_TABLE_LIST ■ INDEP_VAR_TABLE ■ CREATE_EVENT ■ EVENT_REQUIRED ■ INDEP_AGGRE_METHOD ■ ANALYSIS_VAR ■ HPF_PREFERENCES ■ NPF_MODEL_LOOKUP ■ NPF_REDUCTION_METHODS ■ NPF_CONFIG ■ DIM_HIERARCHY ■ CONSENSUS_PLAN_TEMPLATE_LIST ■ LOAD_TYPE <p>Note: You must edit these tables before you run the faw_0002_populate_dependent_config_tables job.</p>	None

Job Name	Job Description	Required Inputs
faw_0002_populate_dependent_config_tables	<p>Creates the following dependent configuration tables in the configuration library. The information in these tables is based on the information that you provided in the configuration tables.</p> <ul style="list-style-type: none"> ■ KPI_CONFIG ■ DIM_VAR_DISP_LIST ■ DIM_HIERARCHY_LVL ■ ANALYSIS_VAR_X_LOAD_TYPE 	Information that you entered in the configuration tables that are created by the faw_0001_generate_config_datamart job.

Note: Before you run the initial jobs, you must edit the values in the editable columns of the tables that are created by the configuration jobs.

Running Initial Jobs

Immediately after you deploy SAS Forecast Analyst Workbench, you must run the initial jobs only once. The initial jobs create and load the initial tables.

You can access the initial jobs at the following location in SAS Data Integration Studio: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave01 (Initial One Time)`

The following table explains the initial jobs in detail. You must run the initial jobs in the sequence in which they appear in the table.

Table 7.2 Initial Jobs

Job Name	Job Description	Required Inputs
faw_0101_generate_datamart	<p>Creates the table structures in the following data marts:</p> <ul style="list-style-type: none"> ■ stage ■ solution data layer (SDL) ■ control library 	Information that you entered into the configuration tables.

Job Name	Job Description	Required Inputs
faw_0102_load_forecast_time_dim	<p>Creates the time dimension table for forecasting, based on the information that is set in the GL_CAL_TYPE_IND configuration parameter. If the GL_CAL_TYPE_IND parameter contains 1, SAS Forecast Analyst Workbench creates the Gregorian calendar. If the GL_CAL_TYPE_IND parameter contains 0, SAS Forecast Analyst Workbench creates the custom calendar.</p> <p>For more information about the configuration parameters, see “Configuring SAS Forecast Analyst Workbench Parameters” on page 30.</p> <p>Note: You can add a custom calendar that is supported by SAS. For more information about time periods that are supported by SAS, see “Date Intervals, Formats, and Functions” in <i>SAS/ETS: User’s Guide</i>.</p> <p>In addition to the time dimension tables, the job also creates the following tables in the CONFIG library:</p> <ul style="list-style-type: none"> time_dim_hierarchy time_dim_hierarchy_lvl <p>You must edit the time_dim_hierarchy and time_dim_hierarchy_lvl tables with the information that meets your business requirement. For more information about these tables, see Chapter 8, “SAS Forecast Analyst Workbench Configuration Tables,” on page 63.</p>	<p>When you are generating the Gregorian calendar, the following configuration parameters are required:</p> <ul style="list-style-type: none"> GL_CAL_NO_OF_YRS GL_CAL_TYPE_IND GL_CAL_YR_START_DT <p>When you are generating the custom calendar, the following information is required:</p> <ul style="list-style-type: none"> GL_CAL_TYPE_IND configuration parameter tables that are present in the stage area: STG_TIME_PERIOD, STG_TIME_PERIOD_ASSOC, STG_TIME_PERIOD_LVL
faw_0103_generate_forecast_time_intervals	<p>Creates the following configuration tables, which are related to forecast time interval:</p> <ul style="list-style-type: none"> FORECAST_INTERVAL BATCH_INTERVAL_THREADS <p>Note: You must edit these configuration tables before you run the faw_0104_load_application_config_tables job.</p>	faw_0102_load_forecast_time_dim
faw_0104_load_application_config_tables	Creates the UIART tables.	Information mentioned in the configuration tables

Note: After you execute the initial one-time jobs, you can load the data into the stage area.

Loading Data into the Stage Area

Overview of the Stage Area

The stage area is the input data layer for SAS Forecast Analyst Workbench. The table structures for the stage area are created from the following information that you specified in the configuration tables:

- the dimensions that you want to use
- the hierarchy levels for each dimension
- dimension attributes
- key performance indicators (KPIs)

SAS Forecast Analyst Workbench contains five core dimensions and two dimensions that you can customize to meet your business requirements. Select **Yes** for the valid flag in the DIM_TABLE_LIST configuration table to use a dimension. You do not need to use all the dimensions. SAS Forecast Analyst Workbench contains the following core dimensions:

- Product
- Store Location
- Customer
- Employee
- Organization

SAS Forecast Analyst Workbench contains the following two dimensions that you can customize to meet your business requirements:

- Custom1
- Custom2

Note: If you select the STORE_LOCATION and PRODUCT dimensions, SAS Forecast Analyst Workbench creates additional columns that are specific to these dimensions.

Note: Based on the dimension that you select, the dimension tables and its dependent tables are created. For example, if you select the PRODUCT dimension, all dependent tables (such as BOM) are created.

You can specify the number of KPIs that you require and the number of dimensions that are required for each KPI. For example, you can specify to use two KPIs (such as demand and sales) and the number of dimensions that are dependent on these two KPIs. The table structure is created by obtaining data from the KPI_CONFIG configuration table.

You can map the stage tables to the source data that is in the source system to be in a format that is uniform and complete. The stage tables ensure that the format of the source data is accurately imported into the tables of SAS Forecast Analyst Workbench.

Structure of the Dimension Tables

The following table provides an example of the columns that are created for the dimensions in the stage area. The dimension that you select are used for the table name. For example, if you select the PRODUCT dimension, the table name is PRODUCT.

Note: In the actual column names, <DIMENSION> is replaced by the name of the dimension that you selected. For example, if you select the PRODUCT dimension, the column names are PRODUCT_RK, PRODUCT_ID, and so on.

Table 7.3 Structure of the Dimension Table

Column Name	Data Type	Mandatory?	Description
<DIMENSION>_ID	Char	Y	Alphanumeric column where the business key identifier of the dimension is stored. This value must be unique.
<DIMENSION>_NM	Char	Y	Value that appears at the leaf-level node of the dimension.
<DIMENSION>_DESC	Char	N	Description of the leaf-level node of the dimension.
LANGUAGE_CD	Char	N	Language code that is applicable for the solution. You must use the same language code that you declared in the configuration parameters. This column is required for SAS Financial Management.
<DIMENSION>_LVL_IDn	Char	Y	Alphanumeric identifier for the nth level of the dimension.
<DIMENSION>_LVL_NMn	Char	Y	Name of the nth level of the dimension.
<DIMENSION>_LVL_DESCn	Char	N	Description of the nth level of the dimension.
<DIMENSION>_ATTRIBn	Char	Y	Various attribute values for the dimension.
VALID_FROM_DTTM	Datetime	Y	The datetime stamp details for the period from which this record is effective in the warehouse. The time value is set to the period when the record is loaded into the warehouse. The time value must be rounded to full seconds. This column is a versioning instrument. Only one record is valid at any given time. If the value for the time is not available, set it to 00:00:00:00.

Column Name	Data Type	Mandatory?	Description
VALID_TO_DTTM	Datetime	Y	The datetime stamp details for the period until which this record is effective in the warehouse. The time value is set to 1 second before the time of the period that the next record with the same key is effective. The time value must be rounded to full seconds. If the value for the time is not available, set it to 23:59:59:00.
PROCESSED_DTTM	Datetime	N	The datetime stamp details for when the record was loaded in the warehouse. In the case of updates that do not version the row, such as error correction and data patching, the column records the datetime stamp for the update.

Table Dependency

You can load the stage tables in the sequence shown in the following table to ensure that all the table dependencies are met.

The following table provides an example that makes the following assumptions:

- all seven dimensions are used in the implementation
- there is only one fact table, KPI_DEMAND

You can use the loading sequence that is shown in the following table if you have more than one fact table.

Table 7.4 Table Dependency

Table Name	Loading Sequence Group
CUSTOM1	1
CUSTOM2	1
CUSTOMER	1
EMPLOYEE	1
ORGANIZATION	1
PRODUCT	1
STORE_LOCATION	1
BOM	2
PRODUCT_SPEC	2

Table Name	Loading Sequence Group
KPI_DEMAND	2
PHASE_IN_PHASE_OUT_DTLS	2
SUCCESSOR_RLTN_DTLS	3
ACT_LIKE_RLTN_DTLS	3

The sequence consists of groups that are specified in the Loading Sequence Group column in the above table. You can load the tables that belong to a group simultaneously or in any order. However, you must load all the tables of a group before you load tables from the next group.

Running Ongoing Jobs

Whenever the customer data is populated and refreshed in the stage library, you must run the ongoing jobs. By running the ongoing jobs, the data is loaded from the stage library into SDL tables, and then into UIART. The ongoing jobs are located in the SAS Data Integration Studio at the following locations:

- /Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave02
- /Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave03

The following table explains the jobs that are present in wave02 and wave03.

Job Name	Job Description	Required Input
faw_0201_load_stage_to_sdl	Loads the data from the stage area to the following tables: <ul style="list-style-type: none"> ■ dimension tables ■ alternate hierarchy tables ■ fact tables ■ independent variable tables ■ bill of material table ■ product specifications table 	faw_0101_generate_datamart and customer data that is loaded into the stage tables.
faw_0301_load_uiart_input_tables	Loads the UIART.	Wave01 jobs

Job Name	Job Description	Required Input
faw_0302_load_attributes	Loads the following attribute tables into the UIART library: <ul style="list-style-type: none"> ■ ATTRIBUTE_LIST ■ ATTRIBUTE_VALUES ■ NODE_ATTRIBUTES 	faw_0301_load_uiart_input_tables
faw_0303_load_event_table	Loads the plan_create_event table into the UIART library.	faw_0301_load_uiart_input_tables

Authorizing Users to Access Data

After you run the initial jobs and the ongoing jobs, you must provide users with access to the solution data. Whenever you add a new user or new dimensional data to the solution and then the ongoing jobs are run, you need to provide users with access to the newly added data.

You use SAS Management Console to authorize users to access the data. For more information about authorizing users to access data, see [“Authorizing Users to Access Data”](#) on page 35.

8

SAS Forecast Analyst Workbench Configuration Tables

<i>Overview of the Configuration Tables</i>	63
<i>BATCH_INTERVAL_THREADS</i>	64
<i>CREATE_EVENT</i>	64
<i>DIM_HIERARCHY</i>	65
<i>DIM_HIERARCHY_LVL</i>	66
<i>DIM_TABLE_LIST</i>	67
<i>DIM_VAR_DISP_LIST</i>	70
<i>EVENT_REQUIRED</i>	72
<i>FORECAST_INTERVAL</i>	73
<i>HPF_PREFERENCES</i>	75
<i>INDEP_AGGRE_METHOD</i>	79
<i>INDEP_VAR_TABLE</i>	80
<i>KPI_CONFIG</i>	81
<i>NPF_CONFIG</i>	83
<i>NPF_MODEL_LOOKUP</i>	85
<i>NPF_REDUCTION_METHODS</i>	86
<i>PLAN_THREAD</i>	87
<i>TIME_DIM_HIERARCHY</i>	87
<i>TIME_DIM_HIERARCHY_LVL</i>	88

Overview of the Configuration Tables

This chapter describes the configuration tables that are created after you run the configuration jobs. You must edit the configuration tables to meet your business requirements. The initial one-time jobs use the information that is in these tables to create the stage tables.

BATCH_INTERVAL_THREADS

The BATCH_INTERVAL_THREADS table is used during the batch process. Each row in the table contains a different periodicity that SAS Forecast Analyst Workbench supports and the corresponding number of sessions to be spawned by the SAS Stored Process Server for parallel processing.

Table 8.1 Description of the BATCH_INTERVAL_THREADS Table

Column Name	Description	Data Type	Editable?	Sample Value
PERIODICITY	The time grain of the forecast period. This value depends on the calendar that you choose for forecasting.	Char (255)	No	CAL_DAY
THREAD_NUM	Number of parallel threads to be spawned. The default value for each interval for this column is same as that of GL_FORECAST_THREADS_NO.	Number	Yes	1

CREATE_EVENT

The CREATE_EVENT table stores information related to events. You can create events in any of the following ways:

- create events in SAS Forecast Studio, and then promote them in SAS Forecast Analyst Workbench using the promote functionality. To create and promote the events:

- 1 Create a forecast.
- 2 Create a modeling project for that forecast.
- 3 Open the modeling project in SAS Forecast Studio.
- 4 Create events in the modeling project.
- 5 Refresh the modeling project in the Modeling category.
- 6 Promote the modeling project in the Modeling category.

These types of events are automatically appended to this table.

- create events by using the HPFEVENTS procedure, and then manually append them to the table.

- create events in a .csv file and import that file into SAS Forecast Analyst Workbench. For details about importing an event by using a .csv file, see *SAS Forecast Analyst Workbench: User's Guide*.

Note: You should not delete any events from the table because they might have been used in forecasts.

Before you add events to the CREATE_EVENT configuration table, see *SAS Forecast Server Procedures: User's Guide*.

DIM_HIERARCHY

The DIM_HIERARCHY table is used to define the alternate hierarchy for a dimension during configuration. After the alternate hierarchy for a dimension is defined, the planner can use that alternate hierarchy to create the plans and can then perform collaboration planning. You must use DIM_HIERARCHY table along with the information that is defined in the DIM_HIERARCHY_LVL table.

If you want to add an alternate hierarchy after you have started to use SAS Financial Management, see [Appendix 2, "Adding an Alternate Hierarchy for Collaboration,"](#) on page 125.

Table 8.2 Description of the DIM_HIERARCHY Table

Column Name	Description	Data Type	Editable?	Sample Value
HIERARCHY_RK	Unique surrogate key for the hierarchy.	Number	Yes	1
DIM_RK	Unique surrogate key for a dimension. This is a foreign key obtained from DIM_TABLE_LIST table in the configuration library.	Number	Yes	1
HIERARCHY_CD	Unique code of the hierarchy.	Char (10)	Yes	BRAND
HIERARCHY_DESC	Description of the hierarchy.	Char (255)	Yes	Product Brand
HIERARCHY_DISPLAY_NM	Display name of the hierarchy. The name is displayed on the user interface while a user selects the alternate hierarchy in the plan.	Char (40)	Yes	Product Brand name
HIER_LVL_CNT	Number of levels in the hierarchy.	Number	Yes	5

DIM_HIERARCHY_LVL

The DIM_HIERARCHY_LVL table defines the hierarchy levels for the additional alternate hierarchies for a dimension. This table is required when the alternate hierarchy is defined for collaboration planning in the DIM_HIERARCHY table.

Table 8.3 Description of DIM_HIERARCHY_LVL Table

Column Name	Description	Data Type	Editable?	Sample Value
HIERARCHY_RK	Unique surrogate key for a hierarchy. This is a foreign key obtained from DIM_HIERARCHY table.	Number	No	1
DIM_RK	Unique key for the dimension. This is a foreign key obtained from DIM_HIERARCHY table.	Number	No	1
TABLE_NM	Name of the hierarchy table. The table name is created in the following format: <DIM_NM>_<HIERARCHY_CD>.	Char (32)	No	PRODUCT_BRAND
VARIABLE_NM	Name of the hierarchy level column.	Char (32)	No	PRODUCT_LVL_NM1
HIER_ORDER_NO	The order of the hierarchy column.	Number	No	1
LEAF_NODE_IND	Leaf-node indicator. The value 0 indicates that the node is not a leaf node. The value 1 indicates that the node is a leaf node.	Number	No	0
DISPLAY_NM	Display name of the hierarchy level.	Char (40)	Yes	PRODUCT LVL NM 1

DIM_TABLE_LIST

The DIM_TABLE_LIST table is created with default values after you run the ETL jobs. Keep the following information in mind when you enter information in the columns that are editable:

- the valid dimensions for the configuration
- the dimension display name
- the hierarchy levels that the dimension should contain
- alternate hierarchies that you might want to add
- the common attributes that the dimension supports
- the valid language code
- the description of the dimension

The DIM_TABLE_LIST table is used to create the dynamic data model. The table also helps create stage tables that contain the mandatory columns with respect to the customer source data.

Table 8.4 Description of the DIM_TABLE_LIST Table

Column Name	Description	Data Type	Editable?	Sample Value
DIM_RK	Unique serial number of the dimension.	Number	No	1
DIM_ID	Unique identifier for the dimension.	Char (32)	No	PRODUCT_ID
DIM_NM	Unique name for the dimension.	Char (32)	No	PRODUCT
DIM_ADK	Additional description key column name for the dimension. This column is required in order to integrate SAS Forecast Analyst Workbench with SAS Financial Management.	Char (32)	No	PRODUCT
PRIMARY_RK_NM	Unique name of the retained key column of the dimension.	Char (40)	No	PRODUCT_RK
VALID_DIM_FLG	Flag that indicates whether the dimension is applicable. Valid values are Y or N . These values must be in sync with the value that is specified in the configuration parameter for short names, GL_SHORT_YES, or GL_SHORT_NO.	Char (3)	Yes	Y

Column Name	Description	Data Type	Editable?	Sample Value
DIM_DESC	Description of the dimension. This column is optional.	Char (255)	Yes	Information about all items that include finished goods, assemblies, subassemblies, and parts.
DIM_DISPLAY_NM	The display name of the dimension. This name is shown on the user interface of SAS Forecast Analyst Workbench.	Char (40)	Yes	ITEM
HIERARCHY_CD	Unique identifier for the hierarchy.	Char (10)	No	DEFAULT
HIERARCHY_DISPLAY_NM	Display name of a hierarchy. The display name that you enter is shown on the user interface.	Char (40)	Yes	Default
HIER_LVL_NO	Number of hierarchy levels that are required for the dimension. If the dimension does not have any hierarchy levels, you must enter 1 in order to create a single hierarchy level for that dimension. The value that you specify in this column determines the number of hierarchy levels that are created in the dimension table.	Number	Yes	6
COMMON_ATTRIB_NO	Number of attributes that are required for the dimensions. If attributes are not required, enter 0. The value that you specify in this column determines the number of attributes that are created in the dimension table.	Number	Yes	6

Column Name	Description	Data Type	Editable?	Sample Value
QUANTITATIVE_DIM_IND	<p>Indicates whether the dimension is a qualitative dimension or a regular dimension. The value 1 indicates that the respective dimension is a qualitative dimension. The value 0 indicates that the dimension is a regular dimension.</p> <p>Note: In order to use a dimension as a qualitative dimension, you also need to set PRODUCT_SUCC_IND to 0 and ensure that the dimension is not a part of any KPI in the CONFIG.KPI_CONFIG table.</p>	Number	Yes	1
PROD_SUCC_IND	<p>Indicates whether the dimension is valid for defining a phase-in relationship in the Administration workspace on the user interface. The value 1 indicates that the dimension is shown on the user interface to define the phase-in relationship. The value 0 indicates that the dimension is not shown on the user interface to define the phase-in relationship.</p>	Number	Yes	1
ORDER_DIM	<p>The order in which the dimensions are displayed on the user interface while a user is adding relationships in the Administration workspace.</p>	Number	Yes	1
LANGUAGE_CD	<p>Required language codes. If you have purchased the license for performing collaboration planning, the value that you enter in this column must match the value that is in the SAS Financial Management Language Code table. Otherwise, you can leave this column blank.</p>	Char (10)	Yes	en

The following table is an example of the DIM_TABLE_LIST table, with important columns.

Table 8.5 Example of the DIM_TABLE_LIST Table

DIM_RK	DIM_NM	VALID_DIM_FLG	DIM_DISP_NM	HIERARCH_CD	HIERARCH_DISPLAY_NM	HIER_LVL_NO	COMMON_ATTRIB_NO	PROD_SUCC_IND	ORDER_DIM	LANGUAGE_CD
1	PRODUCT	Y	PRODUCT	DEFAULT	Default	6	6	1	1	en
2	STORE_LOCATION	Y	STORE_LOCATION	DEFAULT	Default	5	1	1	2	en
3	CUSTOMER	Y	CUSTOMER	DEFAULT	Default	1	1	1	3	en
4	EMPLOYEE	Y	EMPLOYEE	DEFAULT	Default	4	0	1	4	en
5	ORGANIZATION	Y	ORGANIZATION	DEFAULT	Default	4	1	1	5	en
6	CUSTOM1	Y	CUSTOM1	DEFAULT	Default	3	0	1	6	en
7	CUSTOM2	Y	CUSTOM2	DEFAULT	Default	4	2	1	7	en

DIM_VAR_DISP_LIST

The DIM_VAR_DISP_LIST table stores information about the relation between the physical column name and the display name. You can use your business terminology for the display names.

SAS Forecast Analyst Workbench displays all the labels that are configured in this table in the user interface.

Table 8.6 Description of the DIM_VAR_DISP_LIST Table

Column Name	Description	Data Type	Editable?	Sample Value
DIM_RK	Unique serial number of the dimension.	Number	No	1
DIM_NM	Unique name for the dimension.	Char (40)	No	PRODUCT
DIM_ID	Unique identifier for the dimension.	Char (32)	No	PRODUCT_ID

Column Name	Description	Data Type	Editable?	Sample Value
LVL_ATTRIB_IND	Indicates whether the variable is a hierarchy level or an attribute. Enter 1 to indicate that the variable is a hierarchy level. Enter 0 to indicate that the variable is an attribute.	Number	No	1
HIER_ORDER_NO	Specifies the order of the hierarchy level for the variable of the dimension.	Number	No	1
LEAF_NODE_IND	Indicates whether the variable of the dimension is a leaf-level node for the hierarchy level columns. Enter 1 to indicate that the variable of the dimension is a leaf-level node.	Number	Yes	0
VARIABLE_NM	Name of the attribute or hierarchy level of the dimensions. This value is the column name of the dimension table.	Char (40)	No	PRODUCT_LVL_NM_1
VARIABLE_DESC	Description of the variable attributes or of the dimension level. This column is optional.	Char (255)	Yes	Stores the first level of the product hierarchy
DISPLAY_NM	Stores the names of the attributes and hierarchy columns of the dimensions. This name is displayed on the user interface. This column is mandatory. By default, this value is the same as the variable name. You must update the values to meet your business requirements.	Char (40)	Yes	ALL PRODUCTS
ATTRIB_DATATYPE	Indicates the type of data that is in this column if this variable is an attribute. Enter 0 to indicate that the data type is character, 1 to indicate that the data type is an integer, 2 to indicate that it is a double, and 3 to indicate that the data type is a date.	Number	Yes	1
ATTRIB_UOM_CD	The unit of measurement code for the attribute. This column is optional.	Char (10)	Yes	DZ – Dozen

The following table shows an example of the DIM_VAR_DISP_LIST table, with important columns.

Table 8.7 Example of the DIM_VAR_DISP_LIST Table

DIM_RK	DIM_NM	LVL_ATTRIB_IND	HIER_ORDER_NO	LEAF_NODE_ID	VARIABLE_NM	DISPLAY_NM
1	PRODUCT	1	1	0	PRODUCT_LVL_NM_1	ALL
1	PRODUCT	1	2	0	PRODUCT_LVL_NM_2	SEGMENT
1	PRODUCT	1	3	0	PRODUCT_LVL_NM_3	CLASS
1	PRODUCT	1	4	0	PRODUCT_LVL_NM_4	CATEGORY
1	PRODUCT	1	5	0	PRODUCT_LVL_NM_5	SUBCATEGORY
1	PRODUCT	1	6	1	PRODUCT_NM	PRODUCT NAME
1	PRODUCT	0			PRODUCT_ATTRIB1	ASSEMBLY FLAG
1	PRODUCT	0			PRODUCT_ATTRIB2	MAKE OR BUY
1	PRODUCT	0			PRODUCT_ATTRIB3	MANUFACTURING SOURCE
1	PRODUCT	0			PRODUCT_ATTRIB4	PLANNER
1	PRODUCT	0			PRODUCT_ATTRIB5	CONTRIBUTION LEVEL
1	PRODUCT	0			PRODUCT_ATTRIB6	LIFE CYCLE STAGE

EVENT_REQUIRED

The EVENT_REQUIRED table is related to the CREATE_EVENT table in the configuration library. For each event in the CREATE_EVENT table, a row is present in this table. The row contains the name of the event and an indicator of how the event is included in the model. For example, you can force an event to be used, or you can use the event when it is significant to the model.

You can create the EVENT_REQUIRED table in one of the following ways:

- create events in SAS Forecast Studio, and then promote them in SAS Forecast Analyst Workbench

For more information about CREATE_EVENT table, see [“CREATE_EVENT” on page 64](#).

- create events by using the HPFEVENTS procedure, and then manually add the event names and an indicator for how the event is used in the model in EVENT_REQUIRED table
- create events in a .csv file and import that file into SAS Forecast Analyst Workbench.

For more information, see *SAS Forecast Analyst Workbench: User's Guide*.

Table 8.8 Description of the EVENT_REQUIRED Table

Column Name	Description	Data Type	Editable?	Sample Value
NAME	Name of the event.	Char (40)	Yes If a new event is created in the CREATE_EVENT table, you should add that event name to this table.	Event1
REQUIRED	Indicates how the event is included in the model. The following values are permitted: <ul style="list-style-type: none"> ■ YES: Specifies that the events be included in the model as long as the model does not fail diagnosis. ■ MAYBE: Specifies that the events be included in the model as long as the parameters of the events are significant. ■ NO: Specifies that the events be included in the model as long as the parameters of the events are significant and the increment of the value of criterion exceeds a threshold. The default value is NO. 	Char (32)	Yes If a new event is created in the CREATE_EVENT table, you should add an indication of how to use that event in the model in this table.	MAYBE

FORECAST_INTERVAL

The FORECAST_INTERVAL table stores the default values of parameters that are related to forecast intervals (such as **DAY**, **WEEK**, **MONTH**, and **QUARTER**). These intervals are displayed in the user interface and are used in the forecasting process.

Table 8.9 Description of the FORECAST_INTERVAL Table

Column Name	Description	Data Type	Editable?	Sample Value
FORECAST_INTERVAL_NO	Forecast interval number.	Number	No	5
FORECAST_INTERVAL_CD	Forecast interval code. This value must be same as the configuration parameter value that is specified for different base periods (for example, GL_DAY_BASE_PERIOD).	Char (32)	No	CAL_DAY
FORECAST_INTERVAL_DESC	Forecast interval description that is displayed on the user interface.	Char (40)	Yes	DAY
HORIZON	Number of periods to be forecasted.	Number	Yes	12
HISTORY_PERIOD	Number of historical periods to be used in the forecasting process. If a time series contains more than this number of periods, the earlier periods are ignored.	Number	Yes	1095
LOW_HISTORY_THRESHOLD	Least number of periods of historical data that the forecasting process requires in order to generate a statistical forecast. The value of this column cannot be changed through user interface. It is always set to 1.	Number	Yes	1
ACT_LIKE_THRESHOLD	Minimum periods of historical data for an act-like relationship. This value cannot be zero.	Number	Yes	30
MINOBS_SEASON	Minimum number of observations that are required in order to perform seasonal adjustments to the demand forecast for the new product. If you edit this column, the values that you provide should be greater than the default values.	Number	Yes	14
SAS_INTERVAL	Time period interval that the SAS High-Performance Forecasting and Econometric time series supports.	Char (10)	Yes	DAY
SEASONALITY	The seasonality cycle length for the time series.	Number	Yes	7

The following table provides an example of the FORECAST_INTERVAL configuration table.

Table 8.10 Example of FORECAST_INTERVAL Table

FORECAST_INTERVAL_NO	FORECAST_INTERVAL_CD	FORECAST_INTERVAL_DESC	HORIZ_ON	HISTORY_PERIOD	LOW_HISTORY_THRESHOLD	ACT_LIKE_THRESHOLD	MINOBS_SEASON	SAS_INTERVAL	SEASONALITY
1	CAL_YR	Year	12	3	1	1	2	YEAR	1
2	CAL_QTR	Quarter	12	12	1	2	8	QTR	4
3	CAL_MTH	Month	12	36	1	6	24	MONTH	12
4	CAL_WK	Week	12	156	1	12	104	WEEK	52
5	CAL_DAY	Day	12	1095	1	30	14	DAY	7

HPF_PREFERENCES

The HPF_PREFERENCES table contains a list of options for high-performance forecasting procedures, with default values. You can reset the default values by specifying the values in the HPF_PREFERENCES configuration table. If you change a parameter in the HPF_PREFERENCES configuration table, all forecasts are created with the updated parameter values.

When you create a forecast by using the user interface, SAS Forecast Analyst Workbench uses the HPF_PREFERENCES table to create a HPF_PREFERENCES<plan_ID> table in the configuration library. If you change any parameter in the HPF_PREFERENCES<plan_ID> table, the values are applied only to the forecast that you have specified. The plan_ID value is the unique identifier of the forecast and appears in the UIART.PLAN_DETAILS table.

The following table describes the HPF_PREFERENCES table and its columns.

Table 8.11 Description of the HPF_PREFERENCES Table

Column Name	Description	Data Type	Editable?
OPTION	Unique keyword for each HPF option.	Char (40)	No
VALUE	Value of the HPF option.	Char (40)	Yes

The following table contains the parameters that are in the HPF_PREFERENCES table. You can edit the parameters that are not available

on the user interface in the HPF_PREFERENCE_<PLAN_ID> table, where the value of the column EDIT_FROM is **BACK**.

The following table describes the parameters that can be used in the Value column of the HPF_PREFERENCES table.

Table 8.12 Parameters for the Value Column

Parameter Name	Description	Default Value
BASENAME	Prefixes any generated XML specification filename if there are no other contextual base name options.	Diag
SIGMAS	Specifies the prediction standard error for the external model.	3
DIAG_ARIMAX_PERROR1	Specifies the start value of the range of the AR order for obtaining the error series.	5
DIAG_ARIMAX_PERROR2	Specifies the end value of the range of the AR order for obtaining the error series.	10
DIAG_DELAY_LAG_EVENT	Indicates whether the delay lag for the event is present.	0
DIAG_DELAY_LAG_INPUT	Indicates whether the delay lag for input is present.	0
DIAG_DELAYEVENT	Specifies the delay lag for the events. If this option is not specified, the delay lag for the events is set to 0 by default.	0
DIAG_DELAYINPUT	Specifies the delay lag for the inputs. If this option is not specified, the procedure chooses the delay lag for the inputs.	0
DIAG_ENTRYPCCT	Specifies a threshold at which to check the percentage increment of the criterion between two candidate models. The value should be in the range (0,100).	0.1
DIAG_ERROR_SEVERITY	Specifies the severity level of error to be printed. You can specify one of the following values: LOW , MEDIUM , HIGH , ALL , or NONE .	ALL
DIAG_ERROR_STAGE	Specifies the stage of the procedure at which an error message needs to be printed. You can specify one of the following values: PROCEDURELEVEL , DATAPREP , DIAGNOSE , or ALL .	All
DIAG_INCLUDE_IDM	Indicates whether the IDM statement needs to be included.	YES
DIAG_INPUT_SETMISSING	Specifies how missing values (actual or accumulated) are assigned in the accumulated time series for variables that are listed in the INPUT statement. You can specify one of the following values: MISSING , AVERAGE AVG , MINIMUM MIN , MEDIAN MED , MAXIMUM MAX , FIRST , LAST , PREVIOUS PREP , or NEXT .	MISSING

Parameter Name	Description	Default Value
DIAG_INPUT_TRIMMISS	Specifies how missing values (actual or accumulated) are trimmed from the accumulated time series for variables that are listed in the INPUT statement. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE
DIAG_INPUT_ZEROMISS	Specifies how beginning and ending zero values (actual or accumulated) are interpreted in the accumulated time series for variables that are listed in the INPUT statement. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE
DIAG_INPUTMISSING_PCT	Specifies the size of the missing observation as a percentage of the length of the input time series. If INPUTMISSINGPCT=50, an input time series that has more than 50% missing data is ignored in the model.	10
DIAG_TREND_P	Specifies the autoregressive order for the augmented unit root tests and a seasonality test.	min(5,[T/10])
DIAG_TREND_SIGLEVEL	Specifies the significance level to use as a cutoff value for deciding whether the series needs differencing.	0.01
HPF_ALPHA	Specifies the confidence level size to use in computing the confidence limits in the model selection list files.	0.05
HPF_BACK	Specifies the number of observations that are included before the end of the data.	0
HPF_DIAGNOSE_INTERMITTENT	Specifies a number greater than 1 that is used to determine whether a time series is intermittent	2
HPF_FCST_ACCUMULATE	Specifies how the data set observations are accumulated within each time period for the variables that are listed in the FORECAST statement. You can specify one of the following values: NONE , TOTAL , AVERAGE AVG , MINIMUM MIN , MEDIAN MED , MAXIMUM MAX , N , NMISS , NOBS , FIRST , LAST , STDDEV STD , CSS , or USS .	NONE
HPF_FCST_SETMISSING	Specifies how missing values (actual or accumulated) are assigned in the accumulated time series for variables that are listed in the FORECAST statement. You can specify one of the following values: MISSING , AVERAGE AVG , MINIMUM MIN , MEDIAN MED , MAXIMUM MAX , FIRST , LAST , PREVIOUS PREP , or NEXT .	MISSING
HPF_FCST_TRIMMISS	Specifies how missing values (actual or accumulated) are trimmed from the accumulated time series for variables that are listed in the FORECAST statement. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE

Parameter Name	Description	Default Value
HPF_FCST_ZEROMISS	Specifies how beginning zero values, ending zero values, or both (actual or accumulated) are interpreted in the accumulated time series for variables that are listed in the FORECAST statement. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE
HPF_ID_ACCUMULATE	Specifies how the data set observations are accumulated within each time period. You can specify one of the following values: NONE , TOTAL , AVERAGE AVG , MINIMUM MIN , MEDIAN MED , MAXIMUM MAX , N , NMISS , NOBS , FIRST , LAST , STDDEV STD , CSS , or USS .	NONE
HPF_ID_ALIGN	Controls the alignment of SAS dates that are used to identify output observations. You can specify one of the following values: BEGINNING BEG B , MIDDLE MID M , or ENDING END E .	BEGINNING
HPF_ID_SETMISSING	Specifies how missing values (actual or accumulated) are assigned in the accumulated time series. You can specify one of the following values: MISSING , AVERAGE AVG , MINIMUM MIN , MEDIAN MED , MAXIMUM MAX , FIRST , LAST , PREVIOUS PREP , or NEXT .	MISSING
HPF_ID_TRIMMISS	Specifies how missing values (actual or accumulated) are trimmed from the accumulated time series. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE
HPF_ID_ZEROMISS	Specifies how beginning zero values, ending zero values, or both (actual or accumulated) are interpreted in the accumulated time series. You can specify one of the following values: NONE , LEFT , RIGHT , or BOTH .	NONE
DIAG_INPUT_REQUIRED	Specifies how the input variables be included in the model. You can specify one of the following values: YES , NO , or MAYBE .	NO
DIAG_ARIMAX_METHOD	Specifies the method for choosing the tentative ARMA orders. You can specify one of the following values: ESACF , MINIC , or SCAN .	MINIC
HPFENGINE_INPUT_REQUIRED	Enables a check of inputs to models. The options are YES and NO . If you set this option to YES , these checks are not performed and no inputs are dropped from a model. If you set this option to NO , inputs are checked and those with errors or those judged to be collinear are dropped from the model for the current series and task only.	YES
HPFENGINE_INPUTTRIMMISS	Specifies how missing values (either actual or accumulated) are trimmed from the accumulated time series for variables listed in the INPUT statement.	RIGHT

Parameter Name	Description	Default Value
HPF_EXCEPTIONS	Specifies how arithmetic exceptions are handled during the run. The options are CATCH and IGNORE . The option IGNORE specifies that SAS Forecast Analyst Workbench stops on an arithmetic exception. No recovery is attempted. The option CATCH specifies that SAS Forecast Analyst Workbench skips the generation of diagnostic output for the variable that produces the exception in the current BY group.	CATCH
DIAG_ARIMAX_OUTLIER_FILTER	Chooses a model for outlier detection. The options are FULL and SUBSET . If you set the option to FULL , use a full model. If you set the option to SUBSET , use a subset model that includes non-seasonal AR and MA filters only.	SUBSET
DIAG_HPF_COMPONENTS	The type of the decomposition. The value INTEGRATE specifies that the calculated decomposition is of the second type, and the default decomposition is of the first type. In the first type of decomposition, the components in the decomposition always add up, or multiply in the log transformation case, to the series forecasts. In the integrated version of the decomposition, this additive property might not always hold because no natural choices of starting values that guarantee the additivity of the resulting decomposition can be used during the integration of these components.	INTEGRATE

In the HPF_PREFERENCES<plan_id> table, in addition to the parameters that are listed in the previous table, the following parameters are created for each independent variable:

- DIAG_INPUT_REQUIRED<N>
- DIAG_INPUT_SETMISSING<N>
- DIAG_INPUT_TRIMMISS<N>
- DIAG_INPPUT_ZEROMISS<N>

In these parameters, <N> represents the sequence in which the independent variable is selected in the forecast.

INDEP_AGGRE_METHOD

The INDEP_AGGRE_METHOD table contains a list of all aggregation methods that are used to aggregate the independent variables. The list contains all the methods that are described in *SAS Forecast Server Procedures: User's Guide*. Unless a new method is added or changes are made to the existing name of the aggregation method in SAS High-Performance Forecasting, you do not need to modify this table.

Table 8.13 Description of the INDEP_AGGRE_METHOD Table

Column Name	Description	Data Type	Editable?	Sample Value
METHOD_RK	Unique number of the aggregation method.	Number	No	2
METHOD_NM	Name of the method.	Number	No	TOTAL

INDEP_VAR_TABLE

The INDEP_VAR_TABLE table is a configuration table that stores information that is related to the independent variables. After you run the ETL jobs, the table structure is created. You must enter independent variable information in this table. Each row of the table belongs to an independent variable.

Note: After you enter the independent variables in this table and those independent variables are used in the forecast, you must not edit or change their values except for entries in the INDEP_VAR_DISPLAY_NM column. If you edit the values of the independent variables after they are used in a forecast, a mismatch in the existing data might occur.

The names in the INDEP_VAR_NM column are used as the column names in the independent variable table that is specific to key performance indicators (KPIs).

Table 8.14 Description of the INDEP_VAR_TABLE Table

Column Name	Description	Data Type	Editable?	Sample value
INDEP_VAR_RK	Unique number of the independent variable. This column is mandatory.	Number	No	1
INDEP_VAR_NM	Name of the independent variable. This name must be valid SAS name because it is used as a column name in an independent table. This column is mandatory.	Char (32)	No	Product_ Discount
INDEP_VAR_DESC	Short description of the independent variable.	Char (255)	Yes	Discount that our organization wants to give to customers
INDEP_VAR_DISPLAY_NM	Name of the independent variable, which is displayed in the user interface This column is mandatory.	Char (40)	Yes	Product Discount

KPI_CONFIG

The KPI_CONFIG table stores information about the dependent variables. The dependent variables are the key performance indicators (KPIs) to be forecasted by SAS Forecast Analyst Workbench. After you run the ETL jobs, the empty structure is created for KPI_CONFIG table. You can add a row for each KPI. In other words, each row in the table belongs to a KPI. The table also stores information about the independent variables that are associated with the KPI.

Note: After you insert the rows in this table and these values are used in the forecast, do not edit or change the values except for the values in the KPI_AGGRE_METHOD column. If you edit or change the values, a mismatch in the existing data might occur.

Note: You do not need to specify values in the LIB_INDEP, INDEP_TABLE_NM, and INDEP_VAR_LIST columns if none of the independent variables are associated with the configured KPI.

Table 8.15 Description of the KPI_CONFIG Table

Column Name	Description	Data Type	Editable?	Sample Value
KPI_RK	Unique serial number that is associated with the KPI. This column is mandatory.	Number	Yes	1
KPI_NM	Name of the KPI. This column is mandatory.	Char (40)	Yes	DEMAND_KPI
LANGUAGE_CD	The required code for language.	Char (40)	Yes	en
KPI_TYPE	Type of the KPI. This column is mandatory.	Char (32)	Yes	Operational
LIB_NM	Name of the library in which the KPI table that is specified in the KPI_TABLE_NM column is stored. This column is mandatory and it must contain the value SDL .	Char (32)	Yes	SDL
KPI_TABLE_NM	Name of the table in which fact data that is associated with the KPI is stored. The table name must be a valid SAS data set name. This column is mandatory.	Char (40)	Yes	DEMAND_KPI

Column Name	Description	Data Type	Editable?	Sample Value
KPI_VAR_NM	Variable name that is associated with the KPI. The variable name must be a valid SAS variable name. For more information about SAS naming conventions, see <i>SAS Language Reference: Concepts</i> . This column is mandatory.	Char (40)	Yes	Demand_QTY
KPI_AGGRE_METHOD	Aggregation and accumulation method to be used for the KPI. This method must be a valid method as described in <i>SAS Forecast Server Procedures: User's Guide</i> . You can change this method for different forecasts. This column is mandatory.	Char (32)	Yes	Total
SQL_KPI_AGGRE_METHOD	SQL procedure-related to the aggregation method. The values can be AVG MEAN , COUNT FREQ N , CSS , CV , MAX , MIN , NMISS , PRT , RANGE , STD , STD , STDERR , SUM , SUMWGT , T , USS , and VAR .	Char (32)	Yes	Sum
DECIMAL_ROUND_OFF_VAL	Number of digits after the decimal point to be displayed in the user interface. This column is mandatory.	Number	No	2
DIM<RK>_IND	Indicates whether the dimension with a DIM_RK value equal to <RK> in the DIM_TABLE_LIST configuration table is applicable for this KPI. This column is mandatory.	Number	Yes	1
LIB_INDEP	Name of the library in which independent variable fact data that is associated with the KPI is stored. This is a mandatory column and it must contain the value SDL .	Char (32)	Yes	SDL
INDEP_TABLE_NM	Name of the table in which independent variables fact data is stored. The table name must be a valid SAS data set name.	Char (40)	Yes	Demand_kpi_ind_vars

Column Name	Description	Data Type	Editable?	Sample Value
INDEP_VAR_LIST	Specifies the list of the retained keys of the independent variable, separated by commas. This list is displayed in the user interface for the KPI. For more information about the INDEP_VAR_RK column of the INDEP_VAR_TABLE configuration table for the retained key value of the independent variable, see "INDEP_VAR_TABLE" on page 80 .	Char (400)	Yes	1,2,5
LANGUAGE_CD	Required language code. If you have purchased the license for performing collaboration planning, the value that you enter in this column must match the value that is in the SAS Financial Management Language Code table. Otherwise, you can leave this column blank.	Char (10)	Yes	en
KPI_ID	Unique identifier for the KPI.	Char (32)	Yes	DEMAND_ID
KPI_ADK	Additional description key column name for the KPI. This column is required in order to integrate SAS Forecast Analyst Workbench with SAS Financial Management.	Char (32)	Yes	DEMAND
KPI_DESC	Description of the KPI. This column is optional.	Char (255)	Yes	Daily demand.

NPF_CONFIG

The NPF_CONFIG table stores parameters that are used for forecasting the demand for a new product. These parameters are used in the system coding. After you run the ETL jobs, the default values are populated. You must not edit these values except for the value of the NPF_MODE option. In SAS Forecast Analyst Workbench, you can change the default value of NPF_MODE from MULT to ADD, if all the candidate time series contain zero values for a given time point.

Table 8.16 Description of the NPF_CONFIG Table

Column Name	Description	Data Type	Editable?	Sample Value
PRODUCT_RK	Unique number of a product for which the NPF_OPTION column is applicable. By default, the options are applicable for all products. Therefore, the value of this column should be 0.	Number	No	0
KPI_RK	Serial number that is associated with the KPI. The default value is 0. The value 0 indicates that the record is applicable for all KPIs.	Number	No	0
NPF_OPTION	Option name that is used to forecast the demand for the new product.	Char (40)	No	For more information about the NPF options, see Table 8.17 on page 84 .
NPF_VALUE	The option value.	Char (40)	For more information, see Table 8.17 on page 84 .	For more information, see Table 8.17 on page 84 .

The options for the NPF_OPTION column are described in the following table.

Table 8.17 Details of the Options for the NPF_OPTION Column

Option Name	Description	Default Value	Editable?
NPF_MODEL_ALPHA	Significance value for confidence, and prediction intervals and tests.	0.05	No
NPF_DISTANCE_METHOD	Distance method that is used in the clustering of the time series for the candidate product.	EUCLID	No
NPF_CLUSTER_METHOD	Clustering method that is used in the clustering of the time series for the candidate product.	WARD	No
NPF_CLUSTER_SORTLIST	Sorting method that is used in the clustering of the time series for the candidate product.	CLUSTER	No
NPF_QUERY_ACCUMULATE	Accumulation method that is used to compute the cumulative sum of profile series and panel series.	TOTAL	No

Option Name	Description	Default Value	Editable?
NPF_QUERY_TRANSFORM	The method of transformation to be applied to the input series before the interpolating function is fit. SAS Forecast Analyst Workbench uses this method of transformation while it is using EXPAND procedure during the Select Candidate Products step to create profile series and panel series.	CUSUM	No
NPF_ESM_MODEL	Forecasting model to be used in the exponential smoothing reduction method.	SIMPLE	No
NPF_NEURAL_HIDDEN	Number of hidden units in the neural network model.	1	No
NPF_MODE	Model to be used while adjusting the seasonality. You can change the default value to ADD .	MULT	Yes

NPF_MODEL_LOOKUP

The NPF_MODEL_LOOKUP table contains a list of models that are used to forecast the demand for a new product. The New Products workspace in SAS Forecast Analyst Workbench supports the Naive and Neural models by default. You can add custom models by specifying the path of the non-compiled model code in the MODEL_PATH column. For naive and neural models, you do not need to include the path in the MODEL_PATH column.

Table 8.18 Description of the NPF_MODEL_LOOKUP Table

Column Name	Description	Data Type	Editable?	Sample Value
MODEL_ID	Unique identifier for the model.	Number	No	
MODEL_NM	Name of the model.	Char (40)	No	NAIVE_REG
MODEL_DISPLAY_NM	Name of the model, which is displayed in the user interface.	Char (40)	Yes	NAIVE MODEL

Column Name	Description	Data Type	Editable?	Sample Value
MODEL_PATH	<p>Path where the SAS macro of the custom model is stored. The model path must contain two backslashes, as shown in the Sample Value column.</p> <p>The New Products workspace of the SAS Forecast Analyst Workbench contains two default models for forecasting the new product: naive and neural. In addition to these two models, you can use a custom model by specifying its path in this column.</p> <p>For more information about a custom model, see “Writing Code for a Custom Model” on page 131.</p>	Char (255)	Yes	c:\\custom_model.sas

NPF_REDUCTION_METHODS

The NPF_REDUCTION_METHODS table stores the methods that are used in the dimension reduction analysis. The dimension reduction analysis removes the time dependency. The reduced data does not depend on the time or cycle index. The reduction methods are used in the **Select Cluster** step in the New Products workspace in the user interface. Currently, the seasonal decomposition method and exponential smoothing methods are supported.

Table 8.19 Description of the NPF_REDUCTION_METHODS Table

Column Name	Description	Data Type	Editable?	Sample Value
REDUCTION_METHOD_RK	Unique number of the reduction method. Enter 1 to indicate the seasonal decomposition method and enter 2 to indicate the exponential smoothing method.	Number	No	1
REDUCTION_METHOD_NM	Reduction method name. You can edit this value in order to set it according to your locale.	Char (32)	Yes	Decomposition

PLAN_THREAD

The PLAN_THREAD table is used in the forecasting process. Each row in the table contains a forecast ID that is specific to each forecast. Each row also contains the corresponding number of sessions to be spawned by the SAS Stored Process Server for parallel processing. This table is initially populated with default values. The default THREAD_NUM value for each forecast is derived from the GL_FORECAST_THREAD_NO configuration parameter.

Table 8.20 Description of the PLAN_THREAD Table

Column Name	Description	Data Type	Editable?	Sample Value
PLAN_ID	Unique identifier for the forecast.	Number	No	2
THREAD_NUM	Number of parallel threads to be spawned.	Number	Yes	1

TIME_DIM_HIERARCHY

The TIME_DIM_HIERARCHY table contains details for the default time dimension and the alternate hierarchy that is generated for the time dimension. The details for the default hierarchy are created by the initial ETL jobs. The details for the alternate hierarchy are created by the utility jobs.

When the Gregorian calendar is created, the following records are added:

- default hierarchy

The default hierarchy contains the following hierarchy levels: Day, Month, Quarter, and Year. The information about these hierarchy levels (also called base periods) is populated in the TIME_DIM_HIERARCHY_LVL table.

- default week hierarchy

The default week hierarchy contains the day and week hierarchy levels. The information about these hierarchy levels is populated in the TIME_DIM_HIERARCHY_LVL table.

Table 8.21 Description of TIME_DIM_HIERARCHY Table

Column Name	Description	Data Type	Editable?	Sample Value
HIERARCHY_RK	Unique key for the hierarchy.	Number	No	0
DIM_RK	Foreign key obtained from DIM_TABLE_LIST for the hierarchy.	Number	No	0

Column Name	Description	Data Type	Editable?	Sample Value
HIERARCHY_CD	Unique code for the hierarchy.	Char (10)	No	Default
HIERARCHY_DESC	Description of the hierarchy.	Char (255)	No	Default
HIERARCHY_DISPLAY_NM	Display name of the hierarchy.	Char (40)	Yes	Default
HIER_LVL_CNT	Number of levels in the hierarchy.	Number	No	4

TIME_DIM_HIERARCHY_LVL

The TIME_DIM_HIERARCHY_LVL table is generated for the default hierarchy and alternate hierarchies of the time dimension. You can use this alternate hierarchy for collaboration planning.

Table 8.22 Description of TIME_DIM_HIERARCHY_LVL Table

Column Name	Description	Data Type	Editable?	Sample Value
HIERARCHY_RK	Unique key for the hierarchy that is obtained from DIM_HIERARCHY table.	Number	No	0
DIM_RK	Unique key for the dimension that is obtained from DIM_HIERARCHY table.	Number	No	0
TABLE_NM	Name of the hierarchy table.	Char (32)	No	time_dim
VARIABLE_NM	Name of the hierarchy level.	Char (32)	No	CAL_YR
HIER_ORDER_NO	Order in the hierarchy level.	Number	No	1
LEAF_NODE_IND	Leaf node indicator. The value 1 indicates that the node is a leaf node. The value 0 indicates that the node is not a leaf node.	Number	No	0
TIME_PERIOD_TYPE_CD	Code of the time period type.	Char (3)	No	YR

Column Name	Description	Data Type	Editable?	Sample Value
DISPLAY_NM	Display name of the hierarchy level.	Char (40)	Yes	CAL_YR
DEFAULT_PAST_PERIODS	Default number of history periods to consider for collaboration planning. The number that you enter for the default past periods is shown in the user interface for the hierarchy level.	Number	Yes	3
DEFAULT_FUTURE_PERIODS	Default number of future periods to consider for collaboration planning. The number that you enter for the default future period is shown in the user interface for the hierarchy level.	Number	Yes	3

9

Integrating SAS Forecast Analyst Workbench with SAS Financial Management

<i>Preparing Data to Integrate with SAS Financial Management</i>	91
<i>Integration Jobs for SAS Financial Management</i>	92
Overview of Integration Jobs	92
Configuration Job	92
Initial Jobs	93
Ongoing Jobs	95
<i>SAS Financial Management Configuration Tables</i>	98
CODE_LANGUAGE_REF	98
COUNTRY_REF	98
CURRENCY	99
ANALYSIS_VAR	100
ANALYSIS_VAR_X_LOAD_TYPE	102
CONSENSUS_PLAN_TEMPLATE_LIST	102
LOAD_TYPE	103

Preparing Data to Integrate with SAS Financial Management

SAS Forecast Analyst Workbench is thoroughly integrated with SAS Financial Management for the collaboration planning process. When you are using the collaboration planning process, the data flows from SAS Forecast Analyst Workbench to the SAS Financial Management staging area, and then to the SAS Financial Management Data Mart (which is a PostgreSQL database).

To use SAS Financial Management to carry out the collaboration planning process:

- 1 Run the configuration job that is in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave04 (FM Integration - Configuration)/faw_0401_generate_fm_config_tables`.

You must run the configuration job only once immediately after you deploy SAS Forecast Analyst Workbench. When you run the configuration job, the configuration tables (for example, CODE_LANGUAGE_REF,

COUNTRY_REF, and CURRENCY) and UIART table (for example, PLAN_FORM_DETAILS) are created.

- 2 Run the initial one-time jobs that are in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave05 (FM Integration - Initial One Time)`.

You must run the initial one-time jobs only once immediately after you deploy SAS Forecast Analyst Workbench and edit the configuration tables. When you run the initial one-time jobs, the following steps are performed:

- a Configuration tables in the SAS Financial Management staging area are created. An empty structure for all valid dimensions is also created in the staging area.

The dimension keys are also incorporated in the SAS Financial Management fact table that is in the staging area.

- b The data locale (code language), dimension types, and dimensions are loaded into the SAS Financial Management Data Mart.

- 3 Run the ongoing jobs that are in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave06 (FM Integration - Data Loading)`.

These jobs load the dimension members and user authorization for dimension members from SAS Forecast Analyst Workbench into the SAS Financial Management staging area. These jobs also load the dimension members, users, groups, and user_x_groups from the SAS Financial Management staging area to the SAS Financial Management Data Mart.

Integration Jobs for SAS Financial Management

Overview of Integration Jobs

If the plan file includes the license for SAS Financial Management, you must run the jobs that are related to SAS Financial Management integration. The integration jobs are categorized as configuration jobs, initial jobs, and ongoing jobs.

Configuration Job

SAS Forecast Analyst Workbench data is integrated with SAS Financial Management in order to perform the collaboration planning. You can run the configuration job that is in SAS Data Integration Studio at the following location: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave04 (FM Integration - Configuration)/faw_0401_generate_fm_config_tables`.

After you run the configuration job, the following tables are created in the configuration library:

- CODE_LANGUAGE_REF

- COUNTRY_REF
- CURRENCY
- PLAN_FORM_DETAILS

In addition to these configuration tables, the PLAN_FORM_DETAILS table is also created in the UIART library.

Initial Jobs

The initial jobs are in SAS Data Integration Studio at the following location: / Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave05 (FM Integration - Initial One Time).

The following table provides detailed information about the initial jobs.

Table 9.1 Initial Jobs

Job Name	Description	Required Input
faw_0501_load_fm_stg_config_tables	<p>Populates the following tables in the staging area of SAS Financial Management:</p> <ul style="list-style-type: none"> ■ APP_DIMENSION ■ APP_PROPERTY ■ APP_MEMBER_PROPERTY ■ CODE_LANGUAGE ■ COUNTRY ■ DIMENSION_TYPE <p>To populate these tables, data must be populated into the required tables, which are listed in the Required Input column. These tables in the SAS Financial Management staging area are mandatory, including the default country code and language code values.</p> <p>The job performs the following functions:</p> <ul style="list-style-type: none"> ■ creates empty structures for all valid dimension tables with respect to SAS Forecast Analyst Workbench in the SAS Financial Management staging area (for example, PRODUCT, PRODUCT_ASSOC_TYPE, PRODUCT_ASSOC, PRODUCT-NLS) ■ creates empty structures for the STAKEHOLDER dimension ■ loads all the required valid dimension types, dimensions, and attributes of all dimensions with respect to SAS Forecast Analyst Workbench into the SAS Financial Management staging area ■ updates the SAS Financial Management fact table ■ incorporates all the dimension keys into the SAS Financial Management fact table GL_TRANSACTION_SUM, with respect to SAS Forecast Analyst Workbench 	<p>The following tables are required with business-specific data:</p> <ul style="list-style-type: none"> ■ CODE_LANGUAGE_REF ■ COUNTRY_REF ■ DIM_TABLE_LIST ■ SAS_DIMENSION_TYPE ■ DIM_VAR_DISP_LIST

Job Name	Description	Required Input
faw_0502_load_fm_sdm_data_locale	Populates the data locale (code language) from the SAS Financial Management staging area into the SAS Financial Management Data Mart.	Before you run this job, you must have executed the faw_0501_load_fm_stg_config_tables job and the following tables must be populated with data that is specific to SAS Forecast Analyst Workbench: <ul style="list-style-type: none"> ■ COUNTRY ■ CODE_LANGUAGE
faw_0503_create_fm_sdm_dimension_types	Populates all the required dimension types from the SAS Financial Management staging area into the SAS Financial Management Data Mart.	Before you run this job, you must have executed the faw_0501_load_fm_stg_config_tables job and ensured that the data is populated in the DIMENSION_TYPE table in the SAS Financial Management staging area.
faw_0504_create_fm_sdm_dimensions	Populates all required dimensions from the SAS Financial Management staging area into the SAS Financial Management Data Mart. Note: Before you run this job on a multibyte SAS session, you might need to complete the tasks that are documented at http://support.sas.com/kb/52/372.html .	Before you run this job, you must have executed the faw_0501_load_fm_stg_config_tables job and ensured that the data is populated in the following tables in the SAS Financial Management staging area: <ul style="list-style-type: none"> ■ APP_DIMENSION ■ APP_PROPERTY ■ APP_MEMBER_PROPERTY ■ DIMENSION_TYPE

Ongoing Jobs

After you run the initial jobs, you must run the ongoing jobs. The ongoing jobs are categorized as the jobs that load data into the SAS Financial Management staging area and from the staging area into the SAS Financial Management Data Mart.

The faw_0601_load_fm_stg_dimensions job loads the SAS Forecast Analyst Workbench dimension data into the SAS Financial Management staging area. The following table provides detailed information about this job.

Table 9.2 Ongoing Jobs

Job Name	Job Description	Required Input
faw_0601_load_fm_stg_dimensions	<p>Populates the dimension data for the following dimensions into the SAS Financial Management staging area:</p> <ul style="list-style-type: none"> ■ TIME PERIOD ■ ACCOUNT ■ CURRENCY ■ INTORG (Internal Organization) ■ ANALYSIS ■ STAKEHOLDER ■ All valid SAS Forecast Analyst Workbench dimensions (for example, PRODUCT, STORE_LOCATION) ■ UNDER_X_MEMBERS <p>This table associates the user with a dimension member for workflow purposes (which is valid only if those dimension members are used in the target hierarchy of the formset).</p> <p>This job also populates the default hierarchy records for the INTORG (internal organization), CURRENCY, and STAKEHOLDER dimensions.</p>	<p>The following tables of the FAW Configuration Tables library must be populated with business-specific data:</p> <ul style="list-style-type: none"> ■ KPI_CONFIG ■ ANALYSIS_VAR <p>The following tables in the solution data layer must be populated with business-specific data:</p> <ul style="list-style-type: none"> ■ TIME_PERIOD ■ TIME_PERIOD_ASSOC_TYPE ■ TIME_PERIOD_ASSOC ■ STAKEHOLDER ■ STAKEHOLDER_ASSOC ■ All valid SAS Forecast Analyst Workbench dimensions (for example, PRODUCT, STORE_LOCATION) ■ AUTH_ENTRY table in the UIART library

The following jobs load the data from the SAS Financial Management staging area into the SAS Financial Management Data Mart :

- 1 faw_0602_load_fm_sdm_users
- 2 faw_0603_load_fm_sdm_groups
- 3 faw_0604_load_fm_sdm_users_x_groups
- 4 faw_0605_load_fm_sdm_dimensions

These jobs are in SAS Data Integration Studio at the following location: / Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave06 (FM Integration - Data Loading)

The following table provides information about the ongoing jobs.

Table 9.3 Ongoing Jobs

Job Name	Description	Required Input
faw_0602_load_fm_sdm_users	<p>Populates valid SAS Forecast Analyst Workbench users into the SAS Financial Management Data Mart.</p> <p>Note: After you run this job, you might receive a warning message. You can ignore this message.</p>	
faw_0603_load_fm_sdm_groups	<p>Populates valid SAS Forecast Analyst Workbench user groups into the SAS Financial Management Data Mart.</p> <p>Note: After you run this job, you might receive a warning message. You can ignore this message.</p>	
faw_0604_load_fm_sdm_users_x_groups	<p>Populates valid SAS Forecast Analyst Workbench USER_X_GROUPS into the SAS Financial Management Data Mart.</p> <p>Note: After you run this job, you might receive a warning message. You can ignore this message.</p>	
faw_0605_load_fm_sdm_dimensions	<p>Populates all dimension members along with user authorizations for all valid dimension members from the following tables in the SAS Financial Management staging area into the SAS Financial Management Data Mart:</p> <ul style="list-style-type: none"> ■ TIME_PERIOD ■ ACCOUNT ■ CURRENCY ■ INTORG (Internal Organization) ■ ANALYSIS ■ STAKEHOLDER ■ All valid SAS Forecast Analyst Workbench dimensions (for example, PRODUCT, STORE_LOCATION) <p>This job also populates the default hierarchy records for the INTORG (internal organization), CURRENCY, and STAKEHOLDER dimensions from the SAS Financial Management staging area into the SAS Financial Management Data Mart.</p>	<p>You must execute the faw_0601_load_fm_stg_dimensions job before you execute this job.</p> <p>The following tables in the SAS Financial Management staging area must be populated with business-specific data:</p> <ul style="list-style-type: none"> ■ TIME_PERIOD ■ ACCOUNT ■ CURRENCY ■ INTORG (Internal Organization) ■ ANALYSIS ■ STAKEHOLDER ■ All valid SAS Forecast Analyst Workbench dimensions (for example, PRODUCT, STORE_LOCATION)

SAS Financial Management Configuration Tables

CODE_LANGUAGE_REF

The CODE_LANGUAGE_REF table is required when you are using SAS Financial Management to perform collaboration planning. This table contains a row for each language or locale that is used in the solution. This table is required.

Table 9.4 Description of the CODE_LANGUAGE_REF Table

Column Name	Description	Data Type	Editable?	Sample Value
LANGUAGE_CD	A code that identifies a language or locale (for example, en).	Char (3)	Yes	en
LANGUAGE_DESC	Description of the character code that identifies the languages.	Char (255)	Yes	ENGLISH
DEFAULT_LANGUAGE_FLG	Flag that indicates the default language code that is used in SAS Financial Management. The language or locale is used for the names and descriptions in the tables that do not use LANGUAGE_CD as part of the key.	Char (1)	Yes	Y
LOCALE_LANGUAGE_CD	The 2-character language code that is associated with the locale.	Char (2)	Yes	en
LOCALE_VARIANT_CD	This column is blank by default. This column can be used as the third parameter in the aggregate locale string that is used by the Data Mart.	Char (32)	Yes	
LOCALE_COUNTRY_CD	The 2-character standard code for a country (for example, AF for Afghanistan and AL for Albania).	Char (2)	Yes	US
PROCESSED_DTTM	The time at which a particular row of data was created or most recently modified by the job.	Number	Yes	04MAY2011:15:47:00

COUNTRY_REF

The COUNTRY_REF table contains 2-character country codes that conform to the ISO 3166 standard. This table is required.

Table 9.5 Description of the COUNTRY_REF Table

Column Name	Description	Data Type	Editable?	Sample Value
COUNTRY_CD	A 2-character code for a country (for example, AF for Afghanistan, AL for Albania).	Char (3)	Yes	US
COUNTRY_DESC	Country name or description for the unique 2-character code.	Char (255)	Yes	United States
COUNTRY_REGION_DESC	Regional location of the country (for example, North America, Eastern Europe, and Asia).	Char (255)	Yes	US
LANGUAGE_CD	A code that identifies the language or locale that is used for names and descriptions. The code must be defined in the CODE_LANGUAGE table (for example, en for English).	Char (3)	Yes	en
PROCESSED_DTTM	The time at which a row of data was created or most recently modified by the job.	Number	Yes	04MAY2011:09:55:00

CURRENCY

The CURRENCY table contains the list of standard 3-character ISO 4217 codes. These codes are used to identify currency codes that are required by SAS Financial Management. This table is required.

Table 9.6 Description of the CURRENCY Table

Column Name	Description	Data Type	Editable?	Sample Value
CURRENCY_CD	Standard 3-character code used to identify currency (for example, USD for US dollar).	Char (3)	No	USD
CURRENCY_DESC	Currency name or description for the unique 3-character code.	Char (255)	No	US Dollar
LANGUAGE_CD	A code that identifies the language or locale that is used for names and descriptions. The code must be defined in the CODE_LANGUAGE table (for example, en for English).	Char (3)	No	en
CONVERTED_TO_EURO_FLG	Indicates whether the currency was converted to the Euro.	Char (1)	No	N
PROCESSED_DTTM	The time at which a row of data was created or most recently modified by the job.	Number	Yes	04MAY2011:09:55:00

ANALYSIS_VAR

The ANALYSIS_VAR table contains a list of all the analysis variables that are used to measure the KPI values. After you deploy SAS Forecast Analyst Workbench, this table is populated with the following default analysis variables:

- ACTUAL
- PREDICTED
- CONSENSUS
- OVERRIDE

You can also add custom analysis variables in order to perform collaboration planning. You can add a row to this table in order to add additional custom analysis variables. You must seed the custom analysis variable to use it in the collaboration planning process. For more information about configuring and seeding analysis variables, see *SAS Forecast Analyst Workbench: User's Guide*.

Table 9.7 Description of the ANALYSIS_VAR Table

Column Name	Description	Data Type	Editable?	Sample Value
ANALYSIS_VAR_RK	Unique number of the analysis variable. This column is mandatory.	Number	No	3
ANALYSIS_VAR_ADK	Unique code that identifies the new dimension in SAS Financial Management. This code is used to integrate SAS Forecast Analyst Workbench with SAS Financial Management. This column is mandatory when you are using collaboration planning.	Char (32)	No	ANALYSIS
ANALYSIS_VAR_ID	Unique identifier for the analysis variable. This value represents the column name in the fact table. This column is mandatory. This column value must be a valid SAS name. For more information about SAS naming conventions, see <i>SAS Language Reference: Concepts</i> .	Char (32)	No	FINAL
ANALYSIS_VAR_DESC	Short description of the analysis variable.	Char (255)	Yes	This variable contains the collaboration values

Column Name	Description	Data Type	Editable?	Sample Value
LANGUAGE_CD	A code that identifies the language or locale for names and descriptions. The code must be defined in the CODE_LANGUAGE configuration table. This column is mandatory when you are using collaboration planning.	Char (3)	Yes	en
ANALYSIS_VAR_NM	Name of the analysis variable. This column is mandatory when you are using collaboration planning.	Char (40)	No	FINAL
ANALYSIS_VAR_DISPLAY_NM	Name of the analysis variable that is displayed in the user interface. This column is mandatory.	Char (40)	Yes	FINALS
ANALYSIS_DEFAULT_IND	The default analysis variables. You must not change this analysis variable. However, you can add more analysis variables that are available by default on the user interface. The value 1 indicates that the analysis variable is a default variable. The value 0 indicates that the analysis variable is not a default variable.	Number	Yes	1
ANALYSIS_DEFAULT_EXTRACT_IND	The default analysis variable to extract the data from SAS Financial Management. The value 1 indicates that the analysis variable is marked to extract data from SAS Financial Management. The value 0 indicates that the analysis variable is not marked to extract data from SAS Financial Management. The analysis variables that are marked with 1 are shown as default analysis variables to extract data on the user interface. Note: At least one analysis variable must have the value 1.	Number	Yes	0
DEFAULT_LOAD_TYPE_RK	The default load condition for the analysis variable. The information about load condition is obtained from the LOAD_TYPE and ANALYSIS_VAR_X_LOAD_TYPE tables.	Number	Yes	1

ANALYSIS_VAR_X_LOAD_TYPE

The ANALYSIS_VAR_X_LOAD_TYPE table contains information about the analysis variables and their respective load types. You can use the ANALYSIS_VAR and LOAD_TYPE tables to enter information into this table. Based on the information that you enter in this table, the load condition appears in the user interface for collaboration planning.

Table 9.8 Description of ANALYSIS_VAR_X_LOAD_TYPE Table

Column Name	Description	Data Type	Editable?	Sample Value
ANALYSIS_VAR_RK	Unique key for the analysis variable. Refer to the ANALYSIS_VAR table for unique keys.	Number	Yes	1
LOAD_TYPE_RK_COMMA	Conditions for loading the data into SAS Financial Management. For more information about macros, see "LOAD_TYPE" on page 103 . By default, this column contains the value 0, indicating that all values are loaded. Separate load conditions with a comma.	Number	Yes	0

CONSENSUS_PLAN_TEMPLATE_LIST

The CONSENSUS_PLAN_TEMPLATE_LIST table provides templates in case an additional dimension is used for a plan. Use this table in collaboration planning. The following table describes the columns of the CONSENSUS_PLAN_TEMPLATE_LIST table.

Table 9.9 Description of CONSENSUS_PLAN_TEMPLATE_LIST Table

Column Name	Description	Data Type	Editable?	Sample Value
CONSENSUS_PLAN_TEMPLATE_ID	Unique identification of the template.	Char (32)	Yes	sample
CONSENSUS_PLAN_NM	Name of the plan.	Char (40)	Yes	Europe

Column Name	Description	Data Type	Editable?	Sample Value
CONSENSUS_PLAN_MACRO_NM	Name of the template that is used for the additional dimension.	Char (40)	Yes	sample.template

LOAD_TYPE

The LOAD_TYPE table is used during seeding. The LOAD_TYPE table contains sample templates that are provided by SAS Forecast Analyst Workbench. You can add more seeding templates depending on your business requirements. This table is used for performing collaboration planning.

Table 9.10 Description of LOAD_TYPE Table

Column Name	Description	Data Type	Editable?	Sample Value
LOAD_TYPE_RK	Unique key for load type.	Number	No	0
LOAD_TYPE_DISP_NAME	The display name of the load type.	Char (40)	Yes	Seeding predicted
LOAD_TYPE_DESC	Description of the load type.	Char (255)	Yes	Load all values
LOAD_TYPE_MACRO_NM	Name of the load type template. SAS Forecast Analyst Workbench provides the default templates. You can place the customized templates in the <code>templates</code> folder.	Char (255)	Yes	ddcf_fm_seeding_sample1.sas

10

Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics

<i>Introduction to SAS Forecast Analyst Workbench and SAS Visual Analytics Integration</i>	105
<i>Guidelines for Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics</i>	106
<i>Preparing Data to Integrate with SAS Visual Analytics</i>	107
<i>Integration Jobs for SAS Visual Analytics</i>	108
SAS Visual Analytics Integration Tables	110
Introduction to SAS Visual Analytics Integration Tables	110
PLAN_RSLT_SUMMARY_DATA<PLAN_ID>	110
PLAN_FCST_DETAILS<PLAN_ID>	111
PLAN_STAT_DETAILS<PLAN_ID>	112
PLAN_FORECAST_FACT<PLAN_ID>	113
WATERFALL<PLAN_ID>	114

Introduction to SAS Forecast Analyst Workbench and SAS Visual Analytics Integration

You can integrate the output of SAS Forecast Analyst Workbench into SAS Visual Analytics. Using SAS Forecast Analyst Workbench data in SAS Visual Analytics, you can create reports to analyze the data in the way that you want. You use SAS LASR Analytic Server along with SAS Visual Analytics to build and generate the reports.

Guidelines for Integrating SAS Forecast Analyst Workbench with SAS Visual Analytics

Use the following guidelines in order to integrate SAS Forecast Analyst Workbench with SAS Visual Analytics:

- Ensure that the SAS metadata contains the following SAS LASR Analytic Servers and corresponding libraries:

Table 10.1 SAS Metadata and Libraries

SAS LASR Analytic Server	Associated LASR Library Name	Libref	SAS Visual Analytics Metadata Folder
LASR Analytic Server <machine name>	Visual Analytics LASR	VALIBLA	/Products/SAS Visual Analytics Administrator
Public LASR Analytic Server <machine name>	Visual Analytics Public LASR	LASRLIB	/Shared Data/SAS Visual Analytics/Public

- Ensure that the following groups are already present in SAS Management Console:
 - Visual Analytics Data Administrators
 - Visual Data Builder Administrators
 - Visual Analytics Users
- Ensure that the users who are using SAS Visual Analytics to generate the reports are associated with one of the above groups.

Note: If no user is present for SAS Visual Analytics, you can create the users and associate them with the groups.

TIP If SAS LASR Analytic Server is distributed on a grid, then you must place the .ssh file in the user folder on the machine that is associated with SAS metadata.

- Start the SAS LASR Analytic Server from the Manage Environment view of SAS Visual Analytics. To start the SAS LASR Analytic Server:
 - 1 Log on to SAS Visual Analytics Hub as a user who is a member of the Visual Analytics Data Administrators group and of the Visual Data Builder Administrators group.

- 2 On the **Common Actions** pane, click **Manage Environment**. The Manage Environment page appears in a new tab of the browser or in a new window based on the browser settings.
- 3 On the Manage Environment page, select **LASR ► Manage Servers**. The **LASR Servers** tab appears in the right pane.
- 4 Select a server and click ►.

Preparing Data to Integrate with SAS Visual Analytics

When you are using SAS Visual Analytics, the data flows from SAS Forecast Analyst Workbench to a Base SAS library, to the SAS LASR Analytic Server library, and then to SAS Visual Analytics.

To use SAS Visual Analytics:

- 1 In the `GL_FAW_LASRLIBNAME` parameter, enter the name of the library to which you want to upload the data on SAS LASR Analytic Server.

By default, the name of the library is SAS Visual Analytics LASR. You can change the name of the library.

For more information about the `GL_FAW_LASRLIBNAME` parameter, see [“About the Configuration Parameters” on page 31](#).

Note: Enter the exact name of the library to which you want to upload the data on SAS LASR Analytic Server.

- 2 Run the following ETL jobs that are present at `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave09 (VA Integration - Data Preparation)` location in SAS Data Integration Studio:

- `faw_0901_actual_and_indepvars`
- `faw_0902_timeseries`
- `faw_0903_consensus_plan`
- `faw_0904_create_config_for_outcomponent`
- `faw_0905_outcomponent`

- 3 Run the `faw_1001_upload_to_LASR` job that is located at the following location in SAS Data Integration Studio: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave10 (VA integration - Data Upload to LASR)`

When you run this job, the data from `FAW_VA` library is copied to the `<SAS Visual Analytics LASR>` library that is present in SAS LASR Analytic Server and is automatically registered with SAS metadata in the folder `/Products/SAS Forecast Analyst Workbench/Data Sources/Visual Analytics LASR`.

Note: The SAS LASR Analytic Server must be in the running state while it is executing this job so that the data is uploaded to the SAS LASR Analytic Server. If the SAS LASR Analytic Server is stopped for any reason, then the data that is present in the `<SAS Visual Analytics LASR>` library is lost. After

the SAS LASR Analytic Server is started, you can reload the data by running the `faw_1001_upload_to_LASR` job. In this way, the complete set of data is uploaded to the <SAS Visual Analytics LASR> library from FAW_VA library.

If you want to upload the incremental data that is not a part of the tables that are created by Wave09 jobs in an ad hoc way to the <SAS Visual Analytics LASR> library, run the `faw_1002_adhoc_incremental_upload_to_LASR` job that is located at the following location in SAS Data Integration Studio: /

`Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave10 (VA integration - Data Upload to LASR)`.

Integration Jobs for SAS Visual Analytics

In order to load the summarized data of a forecast into SAS Visual Analytics, you must run the integration jobs for SAS Visual Analytics. The integration jobs are in SAS Data Integration Studio at the following locations:

- `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave09 (VA integration - Data Preparation)`
- `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave10 (VA integration - Data Upload to LASR)`

The following table describes the integration jobs.

Table 10.2 Data Preparation Jobs for SAS Visual Analytics

Job Name	Description
<code>faw_0901_actual_and_indepvars</code>	<p>Creates the forecast-specific tables in the following format in FAW_VA library: <code>PLAN_RSLT_SUMMARY_DATA<PLAN_ID></code>. The output table contains information about the actual and predicted values of the KPI, with independent variables, present in the forecast. If the status of the forecast is Forecasted, the predicted value for the KPI exists. If the status of the forecast is Created, the predicted values for the KPI are missing.</p> <p>The <code>PLAN_DETAILS</code> table is also generated in the FAW_VA library. This table contains two columns, <code>plan_id</code> and <code>Plan_nm</code>, which provide information about the forecasts. If the forecast name is <code>sample</code> and the forecast ID is <code>1</code>, the name of the <code>PLAN_RSLT_SUMMARY_DATA<PLAN_ID></code> table is <code>PLAN_RSLT_SUMMARY_DATA1</code>.</p> <p>Note: In order to run this job, you must have at least one forecast in SAS Forecast Analyst Workbench.</p>

Job Name	Description
faw_0902_timeseries	<p>Creates the forecast-specific tables in the following format in the FAW_VA library:</p> <ul style="list-style-type: none"> time series-related data is stored in the following format: PLAN_FCST_DETAILS<PLAN_ID>. This table contains information about the actual and independent variables for the forecasted dates. data is stored in the following format: PLAN_STAT_DETAILS<PLAN_ID>. This table contains statistical information about the MAPE, RMSE, prediction MAPE, and prediction APE. <p>Generates the PLAN_DETAILS table in the FAW_VA library. This table contains the association between the forecast ID and the forecast name. The PLAN_ID column shows the forecast ID for a particular forecast.</p> <p>Note: In order to run this job, you must have at least one forecast in SAS Forecast Analyst Workbench.</p>
faw_0903_consensus_plan	<p>Creates the plan_forecast_fact table for each plan in the FAW_VA library. The CONSENSUS_PLAN_DETAILS table (containing the plan name and number) is generated in the FAW_VA library. This table contains the association of the plan number with the name.</p> <p>In order to run this job, you must have purchased the collaboration license and collaboration planning must be working smoothly.</p> <p>Note: In order to run this job, you must have at least one plan in SAS Forecast Analyst Workbench.</p>
faw_0904_create_config_for_outcomponent	<p>Creates the configuration table that is required for running the faw_0905_outcomponent job. This configuration table is created in the config library. You can edit the values for the driver group and for the variable group. The value for the metric name is provided by SAS Forecast Analyst Workbench.</p>
faw_0905_outcomponent	<p>The waterfall data for each forecast is successfully predicted and the WATERFALL<PLAN_ID> table is created in the FAW_VA library with waterfall data.</p> <p>Note: In order to run this job, you must have at least one forecast in SAS Forecast Analyst Workbench.</p>
faw_1001_upload_to_LASR	<p>Loads the data from the FAW_VA library to the Visual Analytics LASR library.</p>
faw_1002_adhoc_incremental_upload_to_LASR	<p>Loads the incremental data from the FAW_VA library to the Visual Analytics LASR library in an ad hoc manner.</p>

SAS Visual Analytics Integration Tables

Introduction to SAS Visual Analytics Integration Tables

The data that you extract from SAS Forecast Analyst Workbench is stored in the following tables:

- PLAN_RSLT_SUMMARY_DATA<PLAN_ID>
- PLAN_FCST_DETAILS<PLAN_ID>
- PLAN_STAT_DETAILS<PLAN_ID>
- PLAN_FORECAST_FACT<Collaboration plan_ID>
- WATERFALL<PLAN_ID>

Separate data sets are created for data that is extracted for each forecast. The data set names are suffixed with the plan ID. This section provides detailed information about the data sets.

PLAN_RSLT_SUMMARY_DATA<PLAN_ID>

This data set contains historical data for the KPI and independent variables.

Table 10.3 The PLAN_RSLT_SUMMARY_DATA<PLAN_ID> Table

Table type	Fact
Data loading strategy	Insert else update
Load type	New records are inserted and old records are deleted.
Primary key	None
Whether the table is optional	Yes

The following table describes the columns of the PLAN_RSLT_SUMMARY_DATA<PLAN_ID> table.

Table 10.4 Description of PLAN_RSLT_SUMMARY_DATA<PLAN_ID> Table

Column Name	Description	Type	Null Option
MIXED_HIER_NO	Mixed hierarchy number.	Number	Not null

Column Name	Description	Type	Null Option
	Dimension RKs corresponding to the associated dimensions of the forecast at the forecast granularity for the dimensions		Not null
FCST_DATE	Start day of the calendar day.	Number	Null
ACTUAL_DEMAND	Actual values of the selected KPI in the forecast.	Number	Null
PREDICTED_DEMAND	Predicted demand.	Number	Null
FS_OVERRIDE	Forecast override.	Number	Null
FORECAST_LCL	Forecasting lower control limit.	Number	Null
FORECAST_UCL	Forecasting upper control limit.	Number	Null
ORDER	Order information.	Number	Not null
Independent variable name	Name of the independent variable. The independent variables appear only when they are used in the forecast.	Char	

PLAN_FCST_DETAILS<PLAN_ID>

The PLAN_FCST_DETAILS<PLAN_ID> table contains information about time series.

Table 10.5 The PLAN_FCST_DETAILS<PLAN_ID> Table

Table type	Fact
Data loading strategy	Insert else update
Load type	New records are inserted and old records are deleted.
Primary key	None
Whether the table is optional	Yes

The following table describes the columns of the PLAN_FCST_DETAILS<PLAN_ID> table.

Table 10.6 Columns of the PLAN_FCST_DETAILS<PLAN_ID> Table

Column Name	Description	Type	Null Option
	Dimension RKs corresponding to the associated dimensions of the plan at the plan granularity for the dimensions		These are all not null columns.
FCST_DATE	Start date of the calendar day.	Number	Null
ACTUAL_DEMAND	Actual demand of the plan.	Number	Null
PREDICTED_DEMAND	Predicted demand	Number	Null
FS_OVERRIDE	Forecast override	Number	Null
FORECAST_LCL	Forecasting lower control limit	Number	Null
FORECAST_UCL	Forecasting upper control limit	Number	Null
Independent variable name	Name of the independent variable	Char	Null

PLAN_STAT_DETAILS<PLAN_ID>

The PLAN_STAT_DETAILS<PLAN_ID> table contains information about components of the forecast, such as MAPE and RMSE.

Table 10.7 The PLAN_STAT_DETAILS<PLAN_ID> Table

Table type	Fact
Data loading strategy	Insert-update
Load type	New records are inserted and old records are deleted.
Primary key	None
Whether the table is optional	Yes

The following table describes the columns of the PLAN_STAT_DETAILS<PLAN_ID> table.

Table 10.8 Columns of the PLAN_STAT_DETAILS<PLAN_ID> Table

Column Name	Description	Type	Null Option
	Dimensions RKeys corresponding to the associated dimensions of the forecast at the forecast granularity for the dimensions.		These are all not null columns.
MAPE	Mean absolute percent error.	Number	Null
RMSE	Root mean square error.	Number	Null
PREDICTION_APE	Predicted absolute percent error.	Number	Null
PREDICTION_MAPE	Predicted mean absolute percent error.	Number	Null

PLAN_FORECAST_FACT<PLAN_ID>

The PLAN_FORECAST_FACT <PLAN_ID> table contains information about collaboration plans.

Table 10.9 The PLAN_FORECAST_FACT<PLAN_ID> Table

Table type	Fact
Data loading strategy	Insert-update
Load type	New records are inserted and old records are deleted.
Primary key	None
Whether the table is optional	Yes

The following table describes the columns of the PLAN_FORECAST_FACT <PLAN_ID> table.

Table 10.10 Columns of the PLAN_FORECAST_FACT<PLAN_ID> Table

Name	Description	Type	Null Option
FCST_DATE	Start date of the calendar day.	Number	Null
FCST_PLAN_ID	Collaboration plan ID.	Number	Null

Name	Description	Type	Null Option
ACTUAL	Actual values.	Number	Null
PREDICTED	Predicted or forecasted values.	Number	Null
CONSENSUS	Collaboration values.	Number	Null
OVERRIDE	Name of the override parameter.	Char	Null
Dimension IDs	Dimension IDs.	Char	Null

WATERFALL<PLAN_ID>

The WATERFALL<PLAN_ID> table contains information about the components of a fitted model.

Table 10.11 The WATERFALL<PLAN_ID> Table

Table type	Fact
Data loading strategy	Insert-update
Load type	New records are inserted and old records are deleted.
Primary key	None
Whether the table is optional	Yes

The following table describes the columns of the WATERFALL<PLAN_ID> table.

Table 10.12 Columns of the WATERFALL<PLAN_ID> Table

Column Name	Description	Type	Null Option
METRICNAME	Name of the components within the fitted model.	Char	Null
PLAN_ID	Forecast ID.	Number	Null
KPI_NM	Name of the key performance indicator that is to be forecasted.	Char	Null
DUETO_VALUE	Predicted values.	Number	Null
MAPE	Mean absolute percent error value.	Number	Null

Column Name	Description	Type	Null Option
ERROR_PCT	Error, in percent.	Number	Null
APE	Absolute percent error value.	Number	Null
Time levels from year to periodicity			
DRIVER_GROUP	Name of the driver group. For example, BASE, FORECAST_VOL	Char	Null
VARIABLE_GROUP	Name of the variable group.	Char	Null
DIMENSION IDs until the leaf node for forecasting			

11

Integrating SAS Forecast Analyst Workbench with Another SAS Solution

<i>About Integrating SAS Forecast Analyst Workbench with Another SAS Solution</i>	117
<i>Integrate SAS Forecast Analyst Workbench with Another SAS Solution</i>	117
<i>Integration Configuration Tables</i>	118
About Integration Configuration Tables	118
PLAN_HIERARCHY_CONFIG	118
PLAN_KPI_CONFIG	120

About Integrating SAS Forecast Analyst Workbench with Another SAS Solution

You can integrate SAS Forecast Analyst Workbench with another SAS solution seamlessly and transparently. For example, you can integrate SAS Forecast Analyst Workbench with SAS Inventory Optimization Workbench. You can leverage the prediction capability of SAS Forecast Analyst Workbench to integrate the predicted values into another SAS solution and gain an advantage by solving your business challenge. You can perform advanced tasks in another SAS solution by using the predicted values that are generated by SAS Forecast Analyst Workbench.

Integrate SAS Forecast Analyst Workbench with Another SAS Solution

To integrate SAS Forecast Analyst Workbench with another SAS solution:

- 1 Run the following job through SAS Data Integration Studio: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave07 (Integration - Other Solutions)/faw_0701_create_integration_config_tables`

After this job runs, SAS Forecast Analyst Workbench creates the following tables:

- PLAN_HIERARCHY_CONFIG
- PLAN_KPI_CONFIG

These configuration tables are created in the path that is specified in the GL_INT_LIB parameter. For more information about the GL_INT_LIB parameter, see [“About the Configuration Parameters” on page 31](#).

- 2 Edit the configuration tables with your business-specific information.

SAS Forecast Analyst Workbench uses the information that is specified in the configuration tables to generate predicted values. For more information about these configuration tables, see [“Integration Configuration Tables” on page 118](#).

You can use another SAS solution (such as SAS Inventory Optimization Workbench) to create a forecast with your business-specific information. SAS Forecast Analyst Workbench generates the predicted values in the output table in the specified library. You can use the predicted values that are in this table in your SAS solution for further processing.

Integration Configuration Tables

About Integration Configuration Tables

The integration configuration tables are created after you run the faw_0701_create_integration_config_tables job through SAS Data Integration Studio. The following tables are created in the path that is specified in the GL_INT_LIB parameter:

- PLAN_HIERARCHY_CONFIG
- PLAN_KPI_CONFIG

PLAN_HIERARCHY_CONFIG

The PLAN_HIERARCHY_CONFIG table contains the following information that is required for creating a forecast:

- hierarchy name
- hierarchy level
- order of the hierarchy
- forecast leaf-level
- reconciliation level

You must specify the values in this table so that the predicted values can be generated. The following table describes the columns of the PLAN_HIERARCHY_CONFIG table.

Table 11.1 Columns of the PLAN_HIERARCHY_CONFIG Table

Column Name	Description	Type	Editable?
INPUT_COLUMN_NAME	Name of the column that is used in another SAS solution (for example, SAS Inventory Optimization Workbench). SAS Forecast Analyst Workbench generates the predicted values for the values of this column. Note: You cannot select only the lowest-level leaf node. You must select the parent node of the lowest-level leaf node in the hierarchy.	Char	Yes
FAW_DIM_RK	Unique dimension key that corresponds to the INPUT_COLUMN_NAME.	Number	Yes
FAW_DIM_HIER_LEVEL	Hierarchy level of the dimension that you want to use in order to generate the predicted values.	Number	Yes
FAW_PLAN_ORDER	Order of the hierarchy level that can be used to generate the predicted values.	Number	Yes
FAW_FORECAST_LVL_IND	Forecast leaf-level indicator. Enter 1 to specify that the hierarchy level is the leaf-level node. You can specify the value 1 in only one row of this column.	Number	Yes
FAW_RECONCILE_LVL_IND	The reconciliation level indicator. Enter 1 in order to specify that the hierarchy level is the reconciliation level. You can specify the value 1 in only one row of this column.	Number	Yes

PLAN_KPI_CONFIG

The PLAN_KPI_CONFIG table contains the following information that is required for creating a forecast:

- KPI name
- low history threshold
- number of periods that contain historical data
- number of periods in the forecast horizon
- number of periods that contain historical data for act-like relationships

You must specify the values in this table so that the predicted values can be generated. The following table describes the columns of the PLAN_KPI_CONFIG table.

Table 11.2 Columns of the PLAN_KPI_CONFIG Table

Column Name	Description	Type	Editable?
FAW_DEMAND_KPI_NM	Name of the KPI that you want to use in order to create the forecast. The name of the KPI must match the name of the KPI that is specified in the CONFIG.KPI_CONFIG table.	Char	Yes
LOW_HISTORY_THRESHOLD	Low history threshold. Always set this column to 1.	Number	Yes
FORECAST_PAST_PERIODS	The number of periods of historical data that you require.	Number	Yes
NO_OF_FORECASTED_PERIOD	The number of periods in the forecast horizon that you require.	Number	Yes
ACT_LIKE_THRESHOLD	The number of periods of historical data that is required to define an act-like relationship.	Number	Yes



Customizing SAS Forecast Analyst Workbench

- Appendix 1*
Adding a Calendar for Collaboration **123**

- Appendix 2*
Adding an Alternate Hierarchy for Collaboration **125**

- Appendix 3*
Extracting Data for All Stakeholders of a Plan **127**

- Appendix 4*
Adding a Dimension to an Existing Plan **129**

- Appendix 5*
Using a Custom Model **131**

- Appendix 6*
Archiving Data for Reporting **137**

- Appendix 7*
Seeding Analysis Variables **139**

- Appendix 8*
Working with Product Life Cycle Data **143**

Appendix 1

Adding a Calendar for Collaboration

<i>About Adding a Calendar for Collaboration</i>	123
<i>Add a Calendar</i>	123

About Adding a Calendar for Collaboration

SAS Forecast Analyst Workbench enables you to add a calendar in addition to the one that you are already using. You can use this calendar only for collaboration and not for forecasting. Suppose the financial year is different from the forecasting calendar, and you want to perform collaboration planning based on the financial year. In this case, you would add an additional calendar for the collaboration.

After you add a calendar to SAS Forecast Analyst Workbench, the predicted demand data is adjusted according to the newly added calendar. You can add a Gregorian calendar or a custom calendar.

Add a Calendar

When you are adding a custom calendar, the following prerequisite applies:

- Ensure that the data that is loaded in the following tables is valid and is supported by SAS: STG.TIME_PERIOD, STG.TIME_PERIOD_ASSOC, and STG.TIME_PERIOD_LVL. For more information about calendar format, see “Date Intervals, Formats, and Functions” in *SAS/ETS: User’s Guide*.

To add a calendar for collaboration:

- 1 Open the following job in the SAS Data Integration Studio workspace: / **Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0801_load_planning_time_dim**
- 2 Right-click in the empty area of the workspace, and select **Properties**. The Properties dialog box appears.
- 3 On the **Precode and Postcode** tab of the Properties dialog box, enter information for the parameters. The following table describes the parameters of the job.

Table A1.1 Parameter Description

Parameter	Description
Planning calendar type indicator	Specify the planning calendar type indicator to generate the calendar. Enter 1 to generate a Gregorian calendar. Enter 0 to generate a custom calendar.
Hierarchy code	Specify the hierarchy code. Note: If you are creating a Gregorian calendar, you can specify a hierarchy code of up to 7 characters. For a custom calendar, you can specify a hierarchy code of up to 10 characters. Note: Do not include single quotation marks or double quotation marks.
Hierarchy display name	Specify the hierarchy display name. This name is displayed on the user interface when you are create a plan for collaboration.

Note: You can run this job to create multiple calendars. However, ensure that you are not running the job multiple times with the same set of parameters.

- 4 Click **Save**, and then click **OK**. The Properties dialog box closes.
- 5 After the parameters are specified, run the following job: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0801_load_planning_time_dim`
After the job is run, the tables for the calendar are created in solution data layer (SDL) with the following name: `time_<hierarchy code>` (for example, `time_greg`)
Note: When a Gregorian calendar is populated, SAS Forecast Analyst Workbench automatically creates the week hierarchy for the calendar (for example, `time_greg_wk`).
- 6 Open the `TIME_DIM_HIERARCHY_LVL` table in the Config library, and provide the following information:
 - in the `DEFAULT_PAST_PERIODS` column, provide default past periods
 - in the `DEFAULT_FUTURE_PERIODS` column, provide default future periods

Note: The past and future periods that you enter are shown in the user interface when you create a plan for collaboration.

Note: The leaf-level node of the hierarchy of the custom calendar must be same as that of the default calendar.
- 7 Run the following job in order to update the application metadata tables: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0803_updt_application_config_tables`
Note: After you run this job, you might receive a warning message indicating that column lengths are different. You can ignore this message.

Appendix 2

Adding an Alternate Hierarchy for Collaboration

<i>About Adding an Alternate Hierarchy for Collaboration</i>	125
<i>Add an Alternate Hierarchy</i>	125

About Adding an Alternate Hierarchy for Collaboration

When you want to perform a collaboration on a hierarchy other than the default one, add an alternate hierarchy to an existing dimension. For example, suppose the PRODUCT dimension contains the default hierarchy as category, sub-category, and product name. However, to get a broad idea of demand and to perform collaboration, you can choose segment, class, and product name.

Note: The leaf level of the alternate hierarchy must be same as that of the default hierarchy.

Add an Alternate Hierarchy

To add an alternate hierarchy:

- 1 Open the following job in the SAS Data Integration Studio workspace:
`/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0802_add_alternate_hierarchy`
- 2 Right-click in the empty area of the workspace, and select **Properties**. The Properties dialog box appears.
- 3 On the **Precode and Postcode** tab of the Properties dialog box, enter information for the parameters. The following table describes the parameters.

Table A2.1 Parameter Description

Parameter	Description
Dimension name	Enter the name of the dimension to which you want to add an alternate hierarchy. You can use an existing dimension that has already been configured in SAS Forecast Analyst Workbench to add an alternate hierarchy. Note: You can enter the name of the dimension that is in the DIM_NM column of the config.DIM_TABLE_LIST table.
Hierarchy code	Enter the code for the alternate hierarchy. The code can contain a maximum of 10 characters.
Hierarchy display name	Enter a name for the alternate hierarchy.
Hierarchy level count	Enter the number of the level up to which the hierarchy levels must be created.

Note: You can run this job to create multiple hierarchies. However, ensure that you are not running the job multiple times with the same set of parameters.

4 Click **OK**.

5 Run the `faw_0802_add_alternate_hierarchy` job.

After the job is run, the table is created in the staging area and in the SDL with the following format: `stg_<dimension name>_<alternate hierarchy name>`. For example, `stg_product_brand`

6 Run the following job through SAS Data Integration Studio to update the UIART tables:

```
/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08
(Utilities)/faw_0803_updt_application_config_tables
```

Note: After you run this job, you might receive a warning message indicating that column lengths are different. You can ignore this message.

7 Load the customer data into the table that is created for the additional hierarchy in the staging area.

8 Run the `wave02` and `wave03` jobs. For more information about these jobs, see [“Running Ongoing Jobs” on page 60](#).

Appendix 3

Extracting Data for All Stakeholders of a Plan

<i>About Extracting Data for All Stakeholders of a Plan</i>	127
<i>Extract Data for All Stakeholders of a Plan</i>	127

About Extracting Data for All Stakeholders of a Plan

When you are performing collaboration through SAS Forecast Analyst Workbench, you can extract the data for only the default stakeholder. If you want to perform the analysis on the data of all stakeholders, you can extract the data and analyze it in SAS Visual Analytics. You can use SAS Visual Analytics to perform advanced analytics on the data.

Extract Data for All Stakeholders of a Plan

To extract data for all stakeholders of a plan:

- 1 Open the following job in the SAS Data Integration Studio workspace: / **Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0806_extract_fm_data**
- 2 Right-click in the empty area of the workspace, and select **Properties**. The **Properties** dialog box appears.
- 3 On the **Properties** dialog box, click **Precode and Postcode** tab and then enter the following information.

Table A3.1 Parameter Description

Parameter	Description
Plan name	Enter the name of the plan for which you want to extract the data for all stakeholders for analysis.
Model code	Enter the code of the model that is created in SAS Financial Management for the plan.

4 Click **OK**.

5 Run the job.

After you run the job, a table is created in the FAW_VA library. The table is created with the following format: consensus_report_<plan_ID> (for example, consensus_report_2). You can use the data that is in this table for further analysis.

Appendix 4

Adding a Dimension to an Existing Plan

<i>About Adding a Dimension to an Existing Plan</i>	129
<i>Adding a Dimension to an Existing Plan</i>	129

About Adding a Dimension to an Existing Plan

You can add a dimension to an existing plan when you want to perform the collaboration on an additional dimension. For example, suppose Plan ABC contains the dimensions PRODUCT and CUSTOMER and you have performed collaboration planning. Later, you want to add another dimension, QUALITY, to Plan ABC in order to rate the inputs that you obtained in collaboration.

You can add the dimension when the plan status is **Created**, **Initialized**, or **Plan closed**. After you add a dimension to an existing plan, you can continue to perform collaboration.

TIP You can add a dimension to a plan in order to perform qualitative analysis. For example, the dimension name could be QUALITY and its values could be Bad, Good, Better. Stakeholders could use these values of the newly added dimension to perform collaboration.

Adding a Dimension to an Existing Plan

You can add a dimension to an existing plan in order to perform collaboration on an additional dimension.

The following prerequisites apply:

- The status of the plan must be either **Created**, **Initialized**, or **Plan closed**.
- The dimension that you want to add must already be configured in SAS Forecast Analyst Workbench.
- The new dimension must not already exist in the plan.

To add a dimension:

- 1 Open the following job in the SAS Data Integration Studio workspace: /
Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08
(Utilities)/faw_0807_add_adhoc_dim
- 2 Right-click in the empty area of the workspace, and click **Properties**. The **Properties** dialog box appears.
- 3 On the **Properties** dialog box, click the **Precode and Postcode** tab, and enter the following information.

Table A4.1 Parameter Description

Parameter	Description
Plan name	Enter the name of the plan for which you want to add a dimension.
Dimension name	Enter the name of the dimension that you want to add.
Hierarchy code	Enter the hierarchy code that you want to add. You must use the existing hierarchy code.
Hierarchy level number	Enter the hierarchy level number that you want to add. You must use the existing hierarchy number for the selected hierarchy.

- 4 Click **OK**.
- 5 Run the job.
After the job runs, the table is created in the scratch library with the following format: plan_forecast_fact<plan ID>.
For example, plan_forecast_fact12
- 6 Open the table in the scratch library, and enter values for the newly added dimension column.
You can add rows to the table and enter the dimension_key values for the newly added dimension.
- 7 Run the faw_0808_derive_adhoc_dim_hierarchy job that is located at the following location: /Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities).
- 8 Create a template.
The existing templates are located at the following location: sas-configuration-directory\Lev1\AppData\SASForecastAnalystWorkbench\templates
If you create a template, you do not have to populate the fact tables manually every time the data is loaded to the staging area. The data in the newly added dimension will always be present in the table. The template is used while data is refreshed.
- 9 Provide the reference of the template in the config.consensus_plan_template_list table.

Appendix 5

Using a Custom Model

<i>Writing Code for a Custom Model</i>	131
<i>Input Table</i>	132
<i>Output Table</i>	133
<i>Code for the ddcf_npf_spec Macro</i>	133

Writing Code for a Custom Model

You can write the code for additional models that you want to appear in the **Select model** list of the **Select Model** step in the New Products workspace. The following code is a sample of the SAS file that you will write. The code must contain a call to the macro `ddcf_npf_spec`, as shown in this example.

```
%macro ddcf_profile_naive_mod(
    /*- input Panel Series data set information -----*/
dataset=,          /*- I - input data set          -*/
var=,              /*- I - variable name          -*/
byvars=,          /*- I - List of BY variable names -*/
seriesid=_SERIES_, /*- I - series ID variable name -*/
cycleid=_CYCLE_,  /*- I - cycle ID variable name  -*/
    /*- output model predictions data set information-*/
outset=,          /*- O - output data set        -*/

    /*- options -----*/
alpha=            /*- I - confidence limit size    -*/
);
%ddcf_npf_spec;
/*-----*/
/*- sort by Cycle Index          -*/
/*-----*/
PROC SORT DATA=&dataset(KEEP=&byvars&seriesid&cycleid&var) OUT=temp_prof_naive;
BY &cycleid
RUN;
/*-----*/
/*- compute the NAIVE model. Run proc reg          -*/
/*-----*/
proc reg data=temp_prof_naive(rename=&var=actual) NOPRINT;
id &byvars &seriesid
by &cycleid
model ACTUAL = / alpha= $\alpha$ 
```

```

output out= &outset P=PREDICT LCL=LOWER UCL=UPPER STDP=STD RESIDUAL=ERROR;
run;
quit;
%if &SYSERR^=0 & &SYSERR ^= 4 %then %do;
  %let npf_model_status = 1;
  %goto EXIT;
%end;
/*-----*/
/*- sort by BY variable -*/
/*-----*/
proc sort data=&OUTSET out=&OUTSET
  by &byvars&seriesid&cycleid
run;
/* format the output */
data &outset
set &outset
format ACTUAL percent6.2;
format PREDICT percent6.2;
format LOWER percent6.2;
format UPPER percent6.2;
RUN;
%EXIT;;
%mend ddcf_profile_naive_mod;
%ddcf_profile_naive_mod( dataset=npf.Query_panel_subset&PRODUCT_KPI_LIST_ID,
  var=_PROFILE_,
  byvars=&NPF_BYVARS,
  alpha=&npf_model_alpha,
  outset=npf.Mdl_prof_&model_id._&PRODUCT_KPI_LIST_ID
);

```

Input Table

The input table for the macro is `NPF.QUERY_PANEL_SUBSET&PRODUCT_KPI_LIST_ID`. This table is always present in the NPF library. The value of `PRODUCT_KPI_LIST_ID` is the unique identifier of the new product, which can be found in the `UIART.PRODUCT_KPI_LIST` table. The following table is an example of the input table.

PRODUCT_RK	SERIES	start_dt	CUSUM_QTY	Demand of npf	cycle_npf	AGG_	SHARE	CYCLE_SUM	PROFILE	CUPCT_
5	4	1-Jan-10	1611	1611	1	123522	1.30%	1	32222	5.00% 5.00%
5	4	2-Jan-10	3225	1614	2	123649	1.30%	2	32222	5.00% 10%
5	4	3-Jan-10	4800	1575	3	123891	1.30%	3	32222	4.90% 15%

Output Table

The output table is created from the input table and the macro. The name of the output table should be in the following format:

`NPF.MDL_PROF_&MODEL_ID_&PRODUCT_KPI_LIST_ID`. In the name, `MODEL_ID` refers to the unique number for the model mentioned in this table and `PRODUCT_KPI_LIST_ID` is the unique identifier of the new product, which can be found in the `UIART.PRODUCT_KPI_LIST` table.

The following table is an example of the output of custom model table.

PRODUCT_RK	SERIES_	CYCLE_	actual	PREDICT	STD	LOWER	UPPER	ERROR
5	4	1	5.00%	5.00%	0.000534	4.60%	5.40%	3.39E-05
5	4	2	5.00%	5.00%	0.000456	4.70%	5.40%	-0.00026
5	4	3	4.90%	5.00%	0.000593	4.50%	5.50%	-0.00105

The first three columns also appear in the input table. The following list describes the rest of the columns:

- **PREDICT:** Predicted values
- **LOWER:** Lower confidence limit
- **UPPER:** Upper control limit
- **ERROR:** Error term

Code for the ddcf_npf_spec Macro

You can use the following sample code for the `ddcf_npf_spec` macro.

```
*-----
* This macro defines the byvariables, dependent variables, interval,
  cycle index, kpi, cluster specifications etc for npf flow.
*-----;
%macro ddcf_npf_spec;
%Global NPF_BYVARS
  NPF_NUM_BYVARS
  NPF_BYVAR1
  NPF_BYVAR2
  NPF_TIMEID
  npfinterval
  disp_cycle
  calc_cycle
```

```

    npf_kpi_var_nm
    NPF_DEPVARS
    NPF_NUM_DEPVARS
    NPF_DEPVAR1
    NPF_CURRENT_DEPVAR
    NPF_NCLUSTERS
    npf_kpi_aggre
    npf_kpi_lib
    npf_kpi_lib
    ;
*-----
* Specify the Time Series Data Set BY variables names
*-----;
/*%let NPF_BYVARS      = Product_RK  Product_NM;*/
%let NPF_BYVARS      = Product_RK;
%let NPF_NUM_BYVARS  = 1;
%let NPF_BYVAR1     = Product_RK;
%let NPF_BYVAR2     = Product_NM;
%let NPF_TIMEID     = cycle_of_npf;
*-----
* Specify the Time Series Data Set Time ID variable name
*-----;
    data _null_;
        set uiart.product_kpi_list;
        where PRODUCT_KPI_LIST_ID=input("&PRODUCT_KPI_LIST_ID",best12.);
/*        where PRODUCT_RK = input("&PRODUCT_RK",best12.) and KPI_RK = input("&KPI_RK",best12.);*/
        call symputx('npfinterval',PERIODICITY);
        call symputx('disp_cycle',NO_OF_CYCLES_FOR_DISP);
/*        call symputx('calc_cycle',NO_OF_CYCLES_FOR_CALC);*/
        call symputx('NPF_NCLUSTERS',no_of_clusters);
        call symputx('KPI_RK',KPI_RK);
        call symputx('PRODUCT_RK',PRODUCT_RK);
        stop;
run;
%let calc_cycle=&DISP_CYCLE
    data _null_;
        set config.kpi_config;
        where kpi_rk = input("*KPI_RK",best12.);
        call symputx('npf_kpi_var_nm',kpi_Var_nm);
        call symputx ('npf_kpi_aggre',KPI_AGGRE_METHOD);
        call symputx('npf_kpi_lib',LIB_NM);
        call symputx('npf_kpi_table',KPI_TABLE_NM);
run;
*-----
* Specify the Time Series Data Set Dependent Variable names
*-----;
%let NPF_DEPVARS      = &npf_kpi_var_nm ;
%let NPF_NUM_DEPVARS = 1;
%let NPF_DEPVAR1     = &npf_kpi_var_nm ;
%let NPF_CURRENT_DEPVAR = &npf_kpi_var_nm ;
*****
* SPECIFY QUERY SPECIFICATION - CLUSTER SPECIFICATION AND MODEL SPECIFICATION
*****;
%ddcf_load_global_parameters;
%ddcf_npf_interval_specs;
%ddcf_set_npf_option_val;

```

```
%ddcf_npf_prod_kpi_options;  
%ddcf_set_default_npf_param;  
%mend ddcf_npf_spec;  
/*%ddcf_npf_spec;*/
```


Appendix 6

Archiving Data for Reporting

Overview

In the sales and operations planning process within your organization, you might want to use the output of a plan for additional processing and reporting. You can use SAS reporting products (such as SAS Web Report Studio) to obtain and deliver the information that you need, when you need it, and in the format that you need.

Generating Reports of the Forecasted Data

In order to use the forecast data for reporting, you must complete the following steps:

- 1 Check the location where forecasted data is generated for reporting in the `GL_DDF_ARCHIVE_DIR_PATH` configuration parameter. For more information about the `GL_DDF_ARCHIVE_DIR_PATH` parameter, see [“About the Configuration Parameters” on page 31](#).
- 2 Run the following macro through SAS Data Integration Studio:
`%ddcf_generate_forecast_reports(plan_id=)`.

The `plan_ID` is the identification number of the forecast. This identification number is in the `Plan_Details` table, which is in the `UIART` library.

After the macro is run, SAS Forecast Analyst Workbench creates the following tables.

Table A6.1 Forecast-Specific Tables That Contain Forecasted Data

Table Format	Description
<code>PLAN_FCST_DETAILS<PLAN_ID></code>	Contains the complete forecast hierarchy, including the hierarchy name and forecast-related information (for example, the values for ACTUAL, PREDICTED, LCL, UCL)
<code>PLAN_STAT_DETAILS<PLAN_ID></code>	Contains the complete forecast hierarchy, including the hierarchy name and statistical information (for example, the values for MAPE, RMSE, PREDICTION_APE)

SAS Forecast Analyst Workbench updates these tables with the latest forecasted data. You can use these tables to generate the reports.

Archiving Collaboration Data and Generating Reports

In order to archive the output of the plan that contains the collaboration data for additional processing, you must perform the following steps:

- 1 Set the `GL_INCLUDE_ARCHIVE_IND` configuration parameter to `1`. For more information about the `GL_INCLUDE_ARCHIVE_IND` parameter, see [“About the Configuration Parameters” on page 31](#).

Note: You must run the object spawner for the changes to take effect.

- 2 Check the location where data is to be archived in the `GL_DDF_ARCHIVE_DIR_PATH` configuration parameter.
- 3 Perform collaboration on a plan and complete it.

After collaboration is completed, the status becomes **Plan closed**.

SAS Forecast Analyst Workbench creates a folder with name `archive` if that folder is not already present. SAS Forecast Analyst Workbench also creates a folder named `<plan name>` inside the archive folder and saves the data inside it. SAS Forecast Analyst Workbench saves the plan-specific dimension data in the `plan_dim<n>_<cycle_number>` format and plan-specific forecasted data in the `plan_forecast_fact<n>_<cycle_number>` format. The cycle number is incremental and changes as you perform multiple collaboration cycles on the plan.

Appendix 7

Seeding Analysis Variables

Overview of Seeding

Seeding is the process of using existing data to populate initial values in a worksheet to meet your particular business requirements. You can perform seeding in collaboration planning. When you are performing collaboration planning, you can use the following default analysis variables: actual, predicted, consensus, and override. When you want to use other analysis variables for populating business-specific information, you can seed the analysis variable.

Performing Seeding

After the configuration FAW ETL jobs are run, the following configuration tables are created:

- ANALYSIS_VAR
- ANALYSIS_VAR_X_LOAD_TYPE
- LOAD_TYPE

The ANALYSIS_VAR table contains the list of default analysis variables. You can write more analysis variables depending on your business needs. For more information about the ANALYSIS_VAR table, see [“ANALYSIS_VAR” on page 100](#).

The ANALYSIS_VAR_X_LOAD_TYPE table contains information about the applicability of seeding macros for each analysis variable. For more information about the ANALYSIS_VAR_X_LOAD_TYPE table, see [“ANALYSIS_VAR_X_LOAD_TYPE” on page 102](#).

The LOAD_TYPE table contains the default seeding macros and the display name for each macro. You can add more macros to meet your business requirements. For more information about the LOAD_TYPE table, see [“LOAD_TYPE” on page 103](#).

The information in the LOAD_TYPE_DISP_NAME column is displayed in the **Load Condition** list in the Select Variables dialog box in the user interface. For more information, see *SAS Forecast Analyst Workbench: User's Guide*.

In addition to the default macros, you can write more macros and then update these configuration tables to seed the analysis variables.

Adding the analysis variables is a one-time activity, and it should be performed immediately after you deploy SAS Forecast Analyst Workbench. However, if you add an analysis variable after you have started using SAS Forecast Analyst

Workbench for performing collaboration, you must run the ETL jobs in the following sequence in order to use the newly added analysis variable:

- 1 /Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave03
- 2 /Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave06 (FM Integration - Data Loading)

Writing a Macro for Seeding

Default analysis variables (such as CONSENSUS) and user-defined analysis variables do not contain a default set of values. You can use seeding to provide default values for these variables, with respect to the dimensions.

SAS Forecast Analyst Workbench provides sample templates for seeding at the following location: `SAS-configuration-directory\Levn\AppData\SASForecastAnalystWorkbench\templates`.

Note: When you are using this template, change the extension of the template from `.sas.template` to `.sas`.

You can provide your own templates for seeding by creating an entry for them in the `LOAD_TYPE` table in the configuration library. For more information about the `LOAD_TYPE` table, see [“LOAD_TYPE” on page 103](#).

The following examples describe the templates.

Seeding Template Example 1: Predicted values are seeded in the analysis variable

The following formula is applicable for this template: Analysis Variable = Predicted

Seeding Template Example 2: Future Predicted values are seeded in the analysis variable

The following formula is applicable for this template: Analysis Variable = Predicted after the date specified by `GL_FORECAST_DATE`

Implementation consultants customize the default templates to meet your business requirements. The format of the templates is predefined. For more information, see the sample templates provided.

The `SCRATCH.seeding_input<PLAN_ID>_<Analysis_Var>` table is used as input for seeding.

The sample code for the template is designed in such a way that the `scratch.seeding_output<PLAN_ID>_<Analysis_Var>` output table is generated. The `scratch.seeding_output<PLAN_ID>_<Analysis_Var>` output table contains the dimension key columns of the `SCRATCH.SEEDING_INPUT<PLAN_ID>_<Analysis_Var>` table and the seeded ANALYSIS variables.

If you require a new template for seeding, an implementation consultant can design one for you. The new template must conform to the same design.

The following table is the sample `SEEDING_INPUT_<PLAN_ID>_<Analysis_Var>` table.

Table A7.1 Sample SEEDING_INPUT_<PLAN_ID>_<Analysis_Var> Table

PRODUCT_ LVL_RK3	STORE_ LOCATION_ LVL_RK2	CAL_MTH_SK	FCST_DATE	OVERRIDE	CONSENSUS
1004	1002	121	01Jan10	126497	126497
1004	1002	122	01Feb10	130673.4	130673.4
1004	1002	123	01Mar10	126407.2	126407.2
1004	1002	124	01Apr10	130903	130903
1004	1002	125	01May10	132834.9	132834.9

This table is merged with the PLAN_FORECAST_FACT_<PLAN_ID> table by using key columns. After the tables are merged, the analysis variables of the fact table are seeded as per your business requirements, and the PLAN_FORECAST_FACT_<PLAN_ID> table is available in the PLANEXPL library.

Appendix 8

Working with Product Life Cycle Data

<i>Overview</i>	143
<i>Load Product Life Cycle Data Into SAS Forecast Analyst Workbench</i>	143
<i>Export Product Life Cycle Data from SAS Forecast Analyst Workbench</i>	144

Overview

In the sales and operations planning process within your organization, you might want to use the existing data of product life cycle, that is, the phase-in date and phase-out date of a product, their relationships, successor of a product, and so on. Instead of defining the life cycle information for each product individually through the user interface of SAS Forecast Analyst Workbench, you can load the data of all products in a group using ETL jobs. By loading the life cycle data of all products in a group through ETL jobs, you can save time.

Similarly, you can export the existing product life cycle data that is available on user interface (in other words, data present in UIART) of SAS Forecast Analyst Workbench to SCRATCH library in order to use that data for further processing.

Note: Do not change the data or structure of UIART manually. Use ETL jobs for loading or exporting the product life cycle data.

Load Product Life Cycle Data Into SAS Forecast Analyst Workbench

Loading of product life cycle data into SAS Forecast Analyst Workbench is a one-time activity.

In order to load the product life cycle data into SAS Forecast Analyst Workbench, perform the following steps:

- 1 Ensure that you have run the following ETL job: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave01 (Initial One Time)/faw_0101_generate_datamart`
- 2 Ensure that the `GL_FAW_BL_PSQL_PATH` configuration parameter contains correct full path to the PSQL executable file of the PostgreSQL database.

3 Load the following tables of Stage area with the product life cycle information from the customer data:

- STG_PHASE_IN_PHASE_OUT_DTLS
- STG_ACT_LIKE_RLTN_DTLS
- STG_SUCCESSOR_RLTN_DTLS

For more information about Stage tables, see *SAS Forecast Analyst Workbench 5.2: Data Reference Guide*.

4 Run the following ETL job in order to load the product life cycle data from Stage area to solution data layer (SDL): `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0809_plc_load_stage_to_sdl`

5 Run the following ETL job in order to load the product life cycle data from SDL to UIART: `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0810_plc_load_sdl_to_uiart`

Note: When you load product life cycle data to SAS Forecast Analyst Workbench, ensure that the product life cycle data does not contain temporary phase-out records. SAS Forecast Analyst Workbench refers to the Stage library to use the temporary phase-out data.

Export Product Life Cycle Data from SAS Forecast Analyst Workbench

You can export the product life cycle data from UIART of SAS Forecast Analyst Workbench to SCRATCH library.

To export the product life cycle data, in the SAS Data Integration Studio, run the `/Products/SAS Forecast Analyst Workbench/5.2 Jobs/Wave08 (Utilities)/faw_0811_plc_export_uiart_to_scratch`.

SAS Forecast Analyst Workbench creates the following tables in SCRATCH library and loads the UIART data:

- STG_PHASE_IN_PHASE_OUT_DTLS
- STG_ACT_LIKE_RLTN_DTLS
- STG_SUCCESSOR_RLTN_DTLS

Note: Temporary phase-out data is not exported when you export the product life cycle data from SAS Forecast Analyst Workbench.

Recommended Reading

- *SAS Forecast Analyst Workbench: Data Reference Guide*
- *SAS 9.4 Intelligence Platform: System Administration Guide, Third Edition*
- *SAS Data Integration Studio 4.9: User's Guide*
- *SAS 9.4 Management Console: Guide to Users and Permissions*
- *Scheduling in SAS 9.4*

For a complete list of SAS publications, go to sas.com/store/books. If you have questions about which titles you need, please contact a SAS Representative:

SAS Books
SAS Campus Drive
Cary, NC 27513-2414
Phone: 1-800-727-0025
Fax: 1-919-677-4444
E-mail: sasbook@sas.com
Web address: sas.com/store/books

Index

A

analysis variables
 add 100
 for collaboration planning 100
 architecture 5

C

capabilities
 modeling 27
 other 28
 planning 26
 view 26
 components
 client tier 6
 data tier 8
 functional 3
 middle tier 7
 server tier 7
 configuration tables
 edit 55
 of SAS Financial Management 98
 of SAS Forecast Analyst Workbench 63
 custom model
 write 131

D

default file locations
 on UNIX 17
 on Windows 17
 dependent variables
 configure 81
 deployment plan 13, 15
 dimension tables
 dependency 59
 structure 58
 dimensions
 display name 70
 specify 67

E

environment URL 13
 ETL jobs
 configuration jobs 54
 initial jobs 55
 events
 create 64
 modify 64
 specify the usage pattern 72

F

forecast interval 73

H

HPF preferences
 specify 75

I

independent variables
 add 80
 specify aggregation method 79
 installation
 multi-tier 15
 single-tier 15

K

KPIs
 configure 81

L

libraries 49
 log files
 view default path 39

N

new product forecasting
 add a model [85](#)
 configure parameters [83](#)
 specify a reduction method [86](#)

P

parallel processing
 specify [87](#)
 specify batch interval threads [64](#)
 parameters
 configure [30](#), [52](#), [67](#), [74](#)
 permissions
 to a user or group for data [36](#)
 to a user or group on a forecast, a modeling project, or plan [38](#)
 to SAS server users group on Windows [21](#)
 to SAS users on UNIX [22](#)
 pre-installation
 checklist [13](#)
 tasks [11](#)
 pre-installation tasks
 for SAS Intelligence Platform [12](#)
 preferences
 for high-performance forecasting [75](#)
 preparing data

for SAS Forecast Analyst Workbench [52](#)

R

reduction methods
 specify [86](#)
 roles
 in SAS Forecast Analyst Workbench [23](#)

S

SAS Deployment Wizard [16](#)
 solution authorization [35](#)
 system requirements
 verify [11](#)

T

tier
 client [5](#)
 data [5](#)
 middle [5](#)
 server [5](#)



Gain Greater Insight into Your SAS[®] Software with SAS Books.

Discover all that you need on your journey to knowledge and empowerment.

 support.sas.com/bookstore
for additional books and resources.


THE POWER TO KNOW.

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration. Other brand and product names are trademarks of their respective companies. © 2013 SAS Institute Inc. All rights reserved. S107969US.0613

