



THE
POWER
TO KNOW.

SAS/ETS[®] 9.3

User's Guide



The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2011. *SAS/ETS® 9.3 User's Guide*. Cary, NC: SAS Institute Inc.

SAS/ETS® 9.3 User's Guide

Copyright © 2011, SAS Institute Inc., Cary, NC, USA

ISBN 978-1-60764-911-3

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a Web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government Restricted Rights Notice: Use, duplication, or disclosure of this software and related documentation by the U.S. government is subject to the Agreement with SAS Institute and the restrictions set forth in FAR 52.227-19, Commercial Computer Software-Restricted Rights (June 1987).

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513.

1st electronic book, July 2011

1st printing, July 2011

SAS® Publishing provides a complete selection of books and electronic products to help customers use SAS software to its fullest potential. For more information about our e-books, e-learning products, CDs, and hard-copy books, visit the SAS Publishing Web site at support.sas.com/publishing or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are registered trademarks or trademarks of their respective companies.

Contents

I	General Information	1
Chapter 1.	What's New in SAS/ETS 9.3	3
Chapter 2.	Introduction	13
Chapter 3.	Working with Time Series Data	61
Chapter 4.	Date Intervals, Formats, and Functions	125
Chapter 5.	SAS Macros and Functions	153
Chapter 6.	Nonlinear Optimization Methods	169
II	Procedure Reference	191
Chapter 7.	The ARIMA Procedure	193
Chapter 8.	The AUTOREG Procedure	313
Chapter 9.	The COMPUTAB Procedure	459
Chapter 10.	The COPULA Procedure (Experimental)	511
Chapter 11.	The COUNTREG Procedure	555
Chapter 12.	The DATASOURCE Procedure	599
Chapter 13.	The ENTROPY Procedure (Experimental)	689
Chapter 14.	The ESM Procedure	753
Chapter 15.	The EXPAND Procedure	791
Chapter 16.	The FORECAST Procedure	845
Chapter 17.	The LOAN Procedure	901
Chapter 18.	The MDC Procedure	943
Chapter 19.	The MODEL Procedure	1023
Chapter 20.	The PANEL Procedure	1337
Chapter 21.	The PDLREG Procedure	1423
Chapter 22.	The QLIM Procedure	1449
Chapter 23.	The SEVERITY Procedure	1519
Chapter 24.	The SIMILARITY Procedure	1641
Chapter 25.	The SIMLIN Procedure	1709
Chapter 26.	The SPECTRA Procedure	1739
Chapter 27.	The SSM Procedure (Experimental)	1765
Chapter 28.	The STATESPACE Procedure	1829
Chapter 29.	The SYSLIN Procedure	1875
Chapter 30.	The TCOUNTREG Procedure (Experimental)	1939
Chapter 31.	The TIMEID Procedure	1997
Chapter 32.	The TIMESERIES Procedure	2021
Chapter 33.	The TSCSREG Procedure	2091
Chapter 34.	The UCM Procedure	2105
Chapter 35.	The VARMAX Procedure	2219
Chapter 36.	The X11 Procedure	2399
Chapter 37.	The X12 Procedure	2467

III Data Access Engines	2575
Chapter 38. The SASECRSP Interface Engine	2577
Chapter 39. The SASEXCCM Interface Engine (Experimental)	2675
Chapter 40. The SASEFAME Interface Engine	2717
Chapter 41. The SASEHAVR Interface Engine	2769
 IV Time Series Forecasting System	 2819
Chapter 42. Overview of the Time Series Forecasting System	2821
Chapter 43. Getting Started with Time Series Forecasting	2825
Chapter 44. Creating Time ID Variables	2881
Chapter 45. Specifying Forecasting Models	2895
Chapter 46. Choosing the Best Forecasting Model	2933
Chapter 47. Using Predictor Variables	2953
Chapter 48. Command Reference	2985
Chapter 49. Window Reference	2993
Chapter 50. Forecasting Process Details	3099
 V Investment Analysis	 3133
Chapter 51. Overview	3135
Chapter 52. Portfolios	3139
Chapter 53. Investments	3147
Chapter 54. Computations	3191
Chapter 55. Analyses	3203
Chapter 56. Details	3219
 Subject Index	 3231
 Syntax Index	 3273

Credits and Acknowledgments

Credits

Documentation

Editing	Anne Baxter
Technical Review	Evan L. Anderson, Ming-Chun Chang, Jan Chvosta, Brent Cohen, Allison Crutchfield, Paige Daniels, Gül Ege, Bruce Elsheimer, Donald J. Erdman, Kelly Fellingham, Sanggohn Han, Laura Jackson, Wilma S. Jackson, Wen Ji, Kurt Jones, Kathleen Kiernan, Michael J. Leonard, Li C. Li, Mark R. Little, Kevin Meyer, Gina Marie Mondello, Steve Morrison, Youngjin Park, Jim Seabolt, David Schlotzhauer, Rajesh Selukar, Jennifer Sloan, Mark Traccarella, Michele A. Trovero, Charles Sun, Donna E. Woodward
Documentation Production	Tim Arnold

Software

The procedures in SAS/ETS software were implemented by members of the Advanced Analytics division. Program development includes design, programming, debugging, support, documentation, and technical review. In the following list, the name of the developer who currently has principal support responsibility for the procedure is listed first.

ARIMA	Rajesh Selukar, Michael J. Leonard, Terry Woodfield
-------	---

AUTOREG	Xilong Chen, Jan Chvosta, Richard Potter, Jason Qiao, John P. Sall
COMPUTAB	Michael J. Leonard, Alan R. Eaton
COUNTREG	Jan Chvosta, Laura Jackson
DATASOURCE	Kelly Fellingham, Meltem Narter
ENTROPY	Xilong Chen, Arthur Sinko, Greg Sterijevski, Donald J. Erdman
ESM	Michael J. Leonard
EXPAND	Marc Kessler, Michael J. Leonard, Mark R. Little
FORECAST	Michael J. Leonard, Mark R. Little, John P. Sall
LOAN	Richard Potter, Gül Ege
MDC	Jan Chvosta
MODEL	Marc Kessler, Donald J. Erdman, Mark R. Little, John P. Sall
PANEL	Jan Chvosta, Greg Sterijevski
PDLREG	Xilong Chen, Richard Potter, Jan Chvosta, Leigh A. Ihnen
QLIM	Jan Chvosta
SIMILARITY	Michael J. Leonard
SEVERITY	Mahesh V. Joshi
SIMLIN	Mark R. Little, John P. Sall
SPECTRA	Marc Kessler, Rajesh Selukar, Donald J. Erdman, John P. Sall
STATESPACE	Donald J. Erdman, Michael J. Leonard
SYSLIN	Laura. Jackson, Donald J. Erdman, Leigh A. Ihnen, John P. Sall
TIMEID	Marc Kessler, Michael J. Leonard
TIMESERIES	Marc Kessler, Michael J. Leonard
TSCSREG	Jan Chvosta
UCM	Rajesh Selukar

VARMAX	Youngjin Park
X11	Wilma S. Jackson, R. Bart Killam, Leigh A. Ihnen, Richard D. Langston
X12	Wilma S. Jackson
Time Series Forecasting System	Evan L. Anderson, Michael J. Leonard, Meltem Narter, Gül Ege
Investment Analysis System	Gül Ege, Scott Gray, Michael J. Leonard
Compiler and Symbolic Differentiation	Andrew Henrick, Stacey Christian
SASEHAVR	Kelly Fellingham
SASECRSP	Kelly Fellingham, Peng Zang
SASEXCCM	Kelly Fellingham, Peng Zang
SASEFAME	Kelly Fellingham
Testing	Shu An, Ming-Chun Chang, Bruce Elsheimer, Kelly Fellingham, Sanggohn Han, Li C. Li, Jennifer Sloan, Charles Sun, Peng Zang

Technical Support

Members	Paige Daniels, Wen Ji, Kurt Jones, Kathleen Kiernan, Gina Marie Mondello, David Schlotzhauer, Donna E. Woodward
---------	--

Acknowledgments

Hundreds of people have helped the SAS System in many ways since its inception. The following individuals have been especially helpful in the development of the procedures in SAS/ETS software. Acknowledgments for the SAS System generally appear in Base SAS[®] software documentation and SAS/ETS software documentation.

David Amick	Idaho Office of Highway Safety
Lai Cheng	Haver Analytics
David M. DeLong	Duke University
David Dickey	North Carolina State University
Douglas J. Drummond	Center for Survey Statistics
Janet Eder	Chicago Booth Center for Research in Security Prices
Michel Ferland	Statistics Canada
Susie Fortier	Statistics Canada
William Fortney	Boeing Computer Services
Wayne Fuller	Iowa State University
A. Ronald Gallant	The University North Carolina at Chapel Hill
Phil Hanser	Sacramento Municipal Utilities District
Maurine Haver	Haver Analytics
Marvin Jochimsen	Mississippi R&O Center
Jeff Kaplan	SunGard Data Management Solutions
Ken Kraus	Chicago Booth Center for Research in Security Prices
Dominique Ladiray	INSEE
George McCollister	San Diego Gas & Electric
Douglas Miller	Purdue University
Brian C. Monsell	U.S. Census Bureau
Robert Parks	Washington University
Benoit Quenneville	Statistics Canada
Gregory Sali	Idaho Office of Highway Safety
Artur Shepilko	Chicago Booth Center for Research in Security Prices
Bob Spatz	Chicago Booth Center for Research in Security Prices
Mary Young	Salt River Project

The final responsibility for the SAS System lies with SAS alone. We hope that you will always let us know your opinions about the SAS System and its documentation. It is through your participation that SAS software is continuously improved.

Part I

General Information

Chapter 1

What's New in SAS/ETS 9.3

Contents

Overview	3
Highlights of Changes and Enhancements	3
Highlights of Enhancements in SAS/ETS 9.22	4
AUTOREG Procedure	4
COPULA Procedure (Experimental)	5
ESM Procedure	5
SAS/ETS Model Editor Application (Experimental)	5
PANEL Procedure	6
SASECRSP Engine	6
SASEFAME Engine	6
SASEHAVR Engine	7
SASEXCCM Engine (Experimental)	7
SEVERITY Procedure	7
SSM Procedure (Experimental)	8
TCOUNTREG Procedure (Experimental)	9
X12 Procedure	10

Overview

This chapter summarizes the new features available in SAS/ETS 9.3.

If you have used SAS/ETS procedures in the past, you can review this chapter to learn about the new features that have been added. When you see a new feature that might be useful for your work, turn to the appropriate chapter to read about the feature in detail.

Highlights of Changes and Enhancements

The following new procedures have been added to SAS/ETS software:

- COPULA procedure (experimental)

- [SSM procedure](#) (experimental)
- [SASEXCCM interface engine](#) (experimental)

New features have been added to the following SAS/ETS components:

- [AUTOREG procedure](#)
- [ESM procedure](#)
- [PANEL procedure](#)
- [SASEFAME interface engine](#)
- [SASEHAVR interface engine](#)
- [SASECRSP interface engine](#)
- [SEVERITY procedure](#)
- [TCOUNTREG procedure](#)
- [X12 procedure](#)

The SAS/ETS [Model Editor application](#), provided with SAS/ETS 9.22 as an experimental interactive graphical user interface for the MODEL procedure, is depreciated and no longer documented in the *SAS/ETS User's Guide*.

Highlights of Enhancements in SAS/ETS 9.22

Users who are updating directly to SAS/ETS 9.3 from a release prior to SAS/ETS 9.22 can find information about the SAS/ETS 9.22 changes and enhancements in the chapter “What's New in SAS/ETS” in the *SAS/ETS 9.22 User's Guide* (see support.sas.com/whatsnewets92).

AUTOREG Procedure

The AUTOREG procedure now supports heteroscedasticity consistent covariance matrix estimators (HCCME), which consistently estimate the covariance matrix even when the heteroscedasticity structure might be unknown or misspecified. Five forms of HCCMEs are supported: the plain sandwich form (HC0), the degrees-of-freedom-adjustment form (HC1), two types of leverage-adjustment forms (HC2 and HC3), and the high-leverage-adjustment form (HC4).

COPULA Procedure (Experimental)

The new experimental [COPULA procedure](#) enables you to simulate realizations or estimate parameters of multivariate distributions by using the copula approach. This approach is based on the fact that a typical multivariate distribution contains information about both the marginal behavior of individual random variables and also about the dependence structure between them. The COPULA procedure enables you to decouple these two effects and model the dependence structure of random variables by linking their cumulative distribution function (CDF) to a vector of their marginal CDFs as described by the Sklar's Theorem.

The COPULA procedure supports the following types of distributions:

- normal distribution
- t distribution
- Clayton distribution
- Gumbel distribution
- Frank distribution

The COPULA procedure can both estimate the parameters of copula models from data by using maximum likelihood and simulate random data from copula distributions by using either estimated or specified model parameters. The FIT statement is used for model estimation, and the SIMULATE statement is used for simulation. The PLOTS option in the FIT or SIMULATE statement provides various ODS Graphics plots that help you analyze the underlying data.

ESM Procedure

New ODS plots and plot options are available for the [ESM procedure](#). You can plot the periodogram for the error series or a combined periodogram and spectral density estimate plot. See the [PLOT=](#) option for details.

SAS/ETS Model Editor Application (Experimental)

An experimental version of a new interactive application, the SAS/ETS Model Editor, was introduced with SAS/ETS 9.22. The SAS/ETS Model Editor enables you to use the powerful features of PROC MODEL through an interactive graphical user interface.

Based on experience with the experimental version in SAS/ETS 9.22, plans for GUI features to enable easier use of the MODEL procedure are being reconsidered. This experimental SAS/ETS Model Editor application

is still available with SAS/ETS 9.3. However, because design changes are anticipated, documentation for this application is not included in the *SAS/ETS 9.3 Users Guide*. Please refer to the *SAS/ETS 9.22 Users Guide* if you want to use the experimental version of the SAS/ETS Model Editor.

PANEL Procedure

The heteroscedasticity consistent covariance matrix estimator (HCCME) was enhanced by adding the CLUSTER option for the plain sandwich form (HC0), the degrees-of-freedom-adjusted form (HC1), and two types of leverage-adjusted estimators (HC2 and HC3). The CLUSTER option enables you to calculate a cluster-corrected covariance matrix and provides cluster-adjusted standard errors for parameter estimates.

SASECRSP Engine

The [SASECRSP interface engine](#) enables you to access and process time series, events, portfolios, and group data that reside in CRSPAccess (2.99 and earlier) legacy databases.

It also provides a seamless interface between CRSP, COMPUSTAT, and SAS data processing. Currently, SASECRSP supports access of CRSP Stock databases, CRSP Indices databases, and CRSP/Compustat Merged databases.

The following enhancement has been made to the SASECRSP access engine:

- Support has been added for Solaris (SUNOS5.10).

SASEFAME Engine

The [SASEFAME interface engine](#) provides a seamless interface between Fame and SAS data to enable SAS users to access and process time series, case series, and formulas that reside in a Fame database. The following enhancements have been made to the SASEFAME access engine for Fame databases:

- Support has been added for 64-bit Windows.
- Support has been added for AIX.
- The SASEFAME interface uses FAME 10.

SASEHAVR Engine

The [SASEHAVR interface engine](#) is a seamless interface between Haver and SAS data processing that enables you to read economic and financial time series data that reside in a Haver Analytics DLX (Data Link Express) database. The following enhancements have been made to the SASEHAVR access engine for Haver Analytics databases:

- Support has been added for 64-bit Windows.

SASEXCCM Engine (Experimental)

The new experimental [SASEXCCM interface engine](#) enables you to access the CRSP/Compustat Merged Database (CCM), created from data delivered via Compustat's Xpressfeed product, and the CRSP Stock, Indices, and Treasury Databases. SASEXCCM provides a seamless interface for CRSP, Compustat, and SAS data processing. The following new features are provided by the SASEXCCM interface:

- SETID= option supports item handling data access to CRSPAccess (300 and up) databases with the designated set identifier, including setid=250.
- PERMNO= option enables you to select based on permno, a primary keytype for CRSP Stock data.
- PERMCO= option enables you to select based on permco, a keytype for CRSP data.
- CUSIP= option enables you to select based on cusip, a keytype for CRSP data.
- HCUSIP= option enables you to select based on historical cusip, a keytype for CRSP data.
- SICCD= option enables you to select based on siccd, a keytype for CRSP data.
- TICKER= option enables you to select based on ticker, a keytype for CRSP data.
- GVKEY= option enables you to select based on gvkey, a primary keytype for COMPUSTAT data.
- INDNO= option enables you to select based on indno, a primary keytype for CRSP Indices data.
- ITEMLIST= option specifies the data items to be selected for access. This option accepts a string in standard CRSP notation.

SEVERITY Procedure

The [SEVERITY procedure](#) was experimental in SAS/ETS 9.22. PROC SEVERITY is now production status. The following new features and updates have been added to the SEVERITY procedure:

- The following updates have been made to the syntax:
 - The MODEL statement is now replaced with LOSS and SCALEMODEL statements. The LOSS statement specifies the response variable along with any censoring and truncation information. The SCALEMODEL statement specifies the regressor variables. The model-fitting options that were specified in the MODEL statement in SAS/ETS 9.22 should now be specified in the PROC SEVERITY statement.
 - You can now specify multiple distributions in one DIST statement. You can also use a keyword to specify a group of distributions. The syntax for specifying initial parameter values of a distribution has also been updated. If you do not specify a DIST statement, then PROC SEVERITY produces only the empirical CDF estimates and does not fit all predefined distributions by default.
- You can specify the number of occurrences for each observation by using the new FREQ statement.
- You can specify left-censoring and right-truncation by using the new LEFTCENSORED= and RIGHTTRUNCATED= options in the LOSS statement.

The method of specifying censoring has been updated. Instead of using the indicator variable, you now specify censoring by using a variable that contains the censoring limit. This enables you to specify interval-censored data; that is, data in which observations are both right-censored and left-censored.

For interval-censored data, PROC SEVERITY uses Turnbull's method to estimate the empirical distribution function (EDF). Implementation of Turnbull's EDF estimation method is an experimental feature in SAS/ETS 9.3.

- Two predefined versions of Tweedie distributions, TWEEDIE and STWEEDIE, can be fitted with PROC SEVERITY. The TWEEDIE distribution has the more popular parameterization with mean, dispersion, and index parameters. The STWEEDIE distribution has an alternative parameterization with scale, Poisson mean, and index parameters. The STWEEDIE distribution can be used for analyzing regression effects.
- You can estimate parameters by minimizing your own objective function, which can be specified using SAS programming statements. You can use various keyword functions in your SAS program, which are internally expanded by PROC SEVERITY with distribution-specific or problem-specific versions.

This is an experimental feature in SAS/ETS 9.3.

- You can now compute quantile and limited moment for any distribution fitted with PROC SEVERITY by using the two new functions, INVCDF and LIMMOMENT, respectively. These functions are accessible in a PROC FCMP step.

SSM Procedure (Experimental)

The new experimental **SSM procedure** enables linear state space modeling of time series and longitudinal data. An important feature of the SSM procedure is a modeling language that permits easy specification of

possibly complex state space models. In particular, the system matrices—such as the state transition matrix and the covariance of the state disturbance—can be time-varying and their elements can depend on user-specified parameters in a complex way. Often a state space model can be specified by combining simpler submodels. This modeling language is especially suited for specification of such models. The following list identifies the key features of the SSM procedure:

- Many commonly needed state space models, such as the basic univariate and multivariate structural time series models, can be easily specified using a few keywords. Similarly, models for panel data can also be easily specified.
- The unknown model parameters are estimated by (restricted) maximum likelihood and a variety of likelihood-based information criteria are reported for model diagnostics.
- One-step-ahead and full-sample estimates of various state effects (linear combinations of the underlying state vector) and one-step-ahead residuals can be output to a data set. In particular, model-based forecasts, backcasts, interpolated missing values of the response variables, and the estimates of the latent effects such as trend, cycles, and seasonals, can be output to a data set. These estimates are generated by using the Kalman filtering and smoothing algorithm.
- State space modeling is commonly used for the analysis of regularly spaced univariate and multivariate time series data. In fact, state space modeling is quite useful for irregularly spaced—possibly with replicate measurements—longitudinal data also. An important feature of the SSM procedure is that it enables analysis of such longitudinal data, in addition to the regularly spaced univariate and multivariate time series data. Several trend models suitable for longitudinal data analysis can be easily specified using a few keywords.

TCOUNTREG Procedure (Experimental)

The new experimental **TCOUNTREG** procedure is an transitional version of the **COUNTREG** procedure. It includes all features of the **COUNTREG** procedure. In addition to features implemented in the **COUNTREG** procedure, **PROC TCOUNTREG** provides the following new features:

- Two new variable selection methods are provided. The greedy search method can be used either with the forward or backward selection. In each step, the AIC or BIC criterion is evaluated, and the selection continues until the selection criterion is met. The second method uses the penalized likelihood approach to select significant variables. This method is not path-dependent as in the case of greedy search—it falls into the family of LASSO estimators. Using the penalized likelihood method, **PROC TCOUNTREG** fits a model to the set of all candidate variables and evaluates it simultaneously to find a subset of best-fitting variables.
- Several conditional (fixed- and random-effect) count panel data models have been added to the **TCOUNTREG** procedure. The unconditional panel fixed-effect models can be easily estimated in the **TCOUNTREG** procedure by using the **CLASS** statement and the dummy variable approach. This technique is relatively simple but is suitable only for a model with small number of cross sections. If the number of cross sections is large, a conditional model is typically preferred to overcome the

incidental parameters problem. The TCOUNTREG procedure enables you to estimate the following types of models:

- Poisson regression model with fixed and random effects
- negative binomial regression model with fixed and random effects

X12 Procedure

The following new features have been added to the [X12 procedure](#):

- The [PLOTS](#) option in the [PROC X12](#) statement now includes forecast plots. You can now request four different plots for the forecast series on the original scale, and if the series is transformed, on the transformed scale. The following values can be specified in [PLOTS=FORECAST\(value-list\)](#):

FORECAST	plots the actual time series and its one-step-ahead forecasts over the historical period, and plots the forecast and its confidence bands over the forecast horizon.
FORECASTONLY	plots the forecast and its confidence bands over the forecast horizon only.
MODELS	plots the one-step-ahead model forecast and its confidence bands in the historical period.
MODELFORECASTS	plots the one-step-ahead model forecast and its confidence bands in the historical period, and plots the forecast and its confidence bands over the forecast horizon.
TRANSFORECAST	plots the transformed time series and its one-step-ahead forecast over the historical period, and plots the forecast and its confidence bands over the forecast horizon.
TRANSFORECASTONLY	plots the forecast of the transformed series and its confidence bands over the forecast horizon only.
TRANSMODELS	plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period.
TRANSMODELFORECASTS	plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period, and plots the forecast and its confidence bands over the forecast horizon.

- The following new values are available in the [PRINT=](#) option in the [AUTOMDL](#) statement:

ALL	specifies that all automatic modeling output be displayed.
NONE	suppresses all display of automatic modeling output.
ONLY	specifies that only the requested automatic modeling tables be displayed.

- The following new options are available in the **FORECAST** statement:

NBACKCAST=	specifies the number of periods to backcast for regARIMA extension of the series. Backcasting has been shown to improve seasonal adjustment for short series.
OUT1STEP	specifies that the one-step-ahead forecasts be computed and displayed in addition to the multistep forecasts. The one-step-ahead forecasts and associated statistics are useful in evaluating the ARIMA model.
OUTBACKCAST	includes backcasts in certain tables that are sent to the output data set.
OUTFORECAST	includes forecasts in certain tables that are sent to the output data set. This option is an alias of the OUTFORECAST option in the X11 statement.

- The **FINAL=USER** option in the **X11** statement specifies that user-defined regressors are to be removed from the final seasonally adjusted series.
- The **YEARSEAS** option in the **OUTPUT** statement specifies that variables containing values for year and season are included in the **OUT=** data set. These values are useful when creating seasonal plots.
- An auxiliary variable has been added to forecast data sets that are available through ODS OUTPUT. The variable **_SCALE_** indicates whether the observation refers to the original series, “Original,” or the transformed series, “Transformed.” The variable helps you subset the output when the series is transformed.

Chapter 2

Introduction

Contents

Overview of SAS/ETS Software	14
Uses of SAS/ETS Software	15
Contents of SAS/ETS Software	16
About This Book	18
Chapter Organization	18
Typographical Conventions	19
Where to Turn for More Information	20
Accessing the SAS/ETS Sample Library	20
Online Help System	20
SAS Short Courses	21
SAS Technical Support Services	21
Major Features of SAS/ETS Software	21
Discrete Choice and Qualitative and Limited Dependent Variable Analysis	21
Regression with Autocorrelated and Heteroscedastic Errors	23
Simultaneous Systems Linear Regression	24
Linear Systems Simulation	26
Polynomial Distributed Lag Regression	26
Nonlinear Systems Regression and Simulation	27
ARIMA (Box-Jenkins) and ARIMAX (Box-Tiao) Modeling and Forecasting	28
Vector Time Series Analysis	29
State Space Modeling and Forecasting	31
Spectral Analysis	32
Seasonal Adjustment	32
Structural Time Series Modeling and Forecasting	33
Time Series Cross-Sectional Regression Analysis	34
Automatic Time Series Forecasting	35
Time Series Interpolation and Frequency Conversion	37
Trend and Seasonal Analysis on Transaction Databases	39
Access to Financial and Economic Databases	39
Spreadsheet Calculations and Financial Report Generation	42
Loan Analysis, Comparison, and Amortization	42
Time Series Forecasting System	43
Investment Analysis System	44
ODS Graphics	45

Related SAS Software	46
Base SAS Software	46
SAS Forecast Studio	49
SAS High-Performance Forecasting	49
SAS/GRAPH Software	50
SAS/STAT Software	51
SAS/IML Software	52
SAS/IML Stat Studio	52
SAS/OR Software	53
SAS/QC Software	54
MLE for User-Defined Likelihood Functions	54
JMP Software	55
SAS Enterprise Guide	56
SAS Add-In for Microsoft Office	57
Enterprise Miner—Time Series nodes	57
SAS Risk Products	58
References	59

Overview of SAS/ETS Software

SAS/ETS software, a component of the SAS System, provides SAS procedures for:

- econometric analysis
- time series analysis
- time series forecasting
- systems modeling and simulation
- discrete choice analysis
- analysis of qualitative and limited dependent variable models
- seasonal adjustment of time series data
- financial analysis and reporting
- access to economic and financial databases
- time series data management

In addition to SAS procedures, SAS/ETS software also includes seamless access to economic and financial databases and interactive environments for time series forecasting and investment analysis.

Uses of SAS/ETS Software

SAS/ETS software provides tools for a wide variety of applications in business, government, and academia. Major uses of SAS/ETS procedures are economic analysis, forecasting, economic and financial modeling, time series analysis, financial reporting, and manipulation of time series data.

The common theme relating the many applications of the software is time series data: SAS/ETS software is useful whenever it is necessary to analyze or predict processes that take place over time or to analyze models that involve simultaneous relationships.

Although SAS/ETS software is most closely associated with business, finance and economics, time series data also arise in many other fields. SAS/ETS software is useful whenever time dependencies, simultaneous relationships, or dynamic processes complicate data analysis. For example, an environmental quality study might use SAS/ETS software's time series analysis tools to analyze pollution emissions data. A pharmacokinetic study might use SAS/ETS software's features for nonlinear systems to model the dynamics of drug metabolism in different tissues.

The diversity of problems for which econometrics and time series analysis tools are needed is reflected in the applications reported by SAS users. The following listed items are some applications of SAS/ETS software presented by SAS users at past annual conferences of the SAS Users Group International (SUGI).

- forecasting college enrollment (Calise and Earley 1997)
- fitting a pharmacokinetic model (Morelock et al. 1995)
- testing interaction effect in reducing sudden infant death syndrome (Fleming, Gibson, and Fleming 1996)
- forecasting operational indices to measure productivity changes (McCarty 1994)
- spectral decomposition and reconstruction of nuclear plant signals (Hoyer and Gross 1993)
- estimating parameters for the constant-elasticity-of-substitution translog model (Hisnanick 1993)
- applying econometric analysis for mass appraisal of real property (Amal and Weselowski 1993)
- forecasting telephone usage data (Fishetti, Heathcote, and Perry 1993)
- forecasting demand and utilization of inpatient hospital services (Hisnanick 1992)
- using conditional demand estimation to determine electricity demand (Keshani and Taylor 1992)
- estimating tree biomass for measurement of forestry yields (Parresol and Thomas 1991)
- evaluating the theory of input separability in the production function of U.S. manufacturing (Hisnanick 1991)
- forecasting dairy milk yields and composition (Benseman 1990)
- predicting the gloss of coated aluminum products subject to weathering (Khan 1990)
- learning curve analysis for predicting manufacturing costs of aircraft (Le Bouton 1989)

- analyzing Dow Jones stock index trends (Early, Sweeney, and Zekavat 1989)
- analyzing the usefulness of the composite index of leading economic indicators for forecasting the economy (Lin and Myers 1988)

Contents of SAS/ETS Software

Procedures

SAS/ETS software includes the following SAS procedures:

ARIMA	ARIMA (Box-Jenkins) and ARIMAX (Box-Tiao) modeling and forecasting
AUTOREG	regression analysis with autocorrelated or heteroscedastic errors and ARCH and GARCH modeling
COMPUTAB	spreadsheet calculations and financial report generation
COUNTREG	regression modeling for dependent variables that represent counts
COPULA	fitting and simulating multivariate distributions using copula methods
DATASOURCE	access to financial and economic databases
ENTROPY	maximum entropy-based regression
ESM	forecasting by using exponential smoothing models with optimized smoothing weights
EXPAND	time series interpolation, frequency conversion, and transformation of time series
FORECAST	automatic forecasting
LOAN	loan analysis and comparison
MDC	multinomial discrete choice analysis
MODEL	nonlinear simultaneous equations regression and nonlinear systems modeling and simulation
PANEL	panel data models
PDLREG	polynomial distributed lag regression
QLIM	qualitative and limited dependent variable analysis
SEVERITY	modeling the statistical distribution of the severity of losses and other events
SIMILARITY	similarity analysis of time series data for time series data mining
SIMLIN	linear systems simulation
SPECTRA	spectral and cross-spectral analysis
SSM	state space modeling of time series
STATESPACE	state space modeling and automated forecasting of multivariate time series
SYSLIN	linear simultaneous equations models
TIMEID	identifying the time frequency for data sets containing time series data

TIMESERIES	analysis of time-stamped transactional data
TSCSREG	time series cross-sectional regression analysis
UCM	unobserved components analysis of time series
VARMAX	vector autoregressive and moving-average modeling and forecasting
X11	seasonal adjustment (Census X-11 and X-11 ARIMA)
X12	seasonal adjustment (Census X-12 ARIMA)

Macros

SAS/ETS software includes the following SAS macros:

%AR	generates statements to define autoregressive error models for the MODEL procedure
%BOXCOXAR	investigates Box-Cox transformations useful for modeling and forecasting a time series
%DFPVALUE	computes probabilities for Dickey-Fuller test statistics
%DFTEST	performs Dickey-Fuller tests for unit roots in a time series process
%LOGTEST	tests to determine whether a log transformation is appropriate for modeling and forecasting a time series
%MA	generates statements to define moving-average error models for the MODEL procedure
%PDL	generates statements to define polynomial distributed lag models for the MODEL procedure

These macros are part of the SAS AUTOCALL facility and are automatically available for use in your SAS program. Refer to *SAS Macro Language: Reference* for information about the SAS macro facility.

Access Interfaces to Economic and Financial Databases

In addition to PROC DATASOURCE, these SAS/ETS access interfaces provide seamless access to financial and economic databases:

SASECRSP	LIBNAME engine for accessing time series and event data residing in CRSPAccess database.
SASEFAME	LIBNAME engine for accessing time or case series data residing in a FAME database.
SASEHAVR	LIBNAME engine for accessing time series residing in a HAVER ANALYTICS Data Link Express (DLX) database.
SASEXCCM	LIBNAME engine (experimental) for accessing data items residing in the CRSP US Stock (STK) Database, the CRSP US Stock and Indices (IND) Database, the CRSP US Treasury (TRS) Database, or the CRSP/Compustat Merged (CCM) Database, which is created from data delivered via Standard and Poor's Compustat Xpressfeed product.

The Time Series Forecasting System

SAS/ETS software includes an interactive forecasting system, described in *Part IV*. This graphical user interface to SAS/ETS forecasting features was developed with SAS/AF software and uses PROC ARIMA and other internal routines to perform time series forecasting. The [Time Series Forecasting System](#) makes it easy to forecast time series and provides many features for graphical data exploration and graphical comparisons of forecasting models and forecasts. (You must have SAS/GRAPH® installed to use the graphical features of the system.)

The Investment Analysis System

The [Investment Analysis System](#), described in *Part V*, is an interactive environment for analyzing the time-value of money in a variety of investments. Various analyses are provided to help analyze the value of investment alternatives: time value, periodic equivalent, internal rate of return, benefit-cost ratio, and break-even analysis.

About This Book

This book is a user's guide to SAS/ETS software. Since SAS/ETS software is a part of the SAS System, this book assumes that you are familiar with Base SAS software and have the books *SAS Language Reference: Dictionary* and *Base SAS Procedures Guide* available for reference. It also assumes that you are familiar with SAS data sets, the SAS DATA step, and with basic SAS procedures such as PROC PRINT and PROC SORT. Chapter 3, "[Working with Time Series Data](#)," in this book summarizes the aspects of Base SAS software that are most relevant to the use of SAS/ETS software.

Chapter Organization

Following a brief [What's New](#), this book is divided into five major parts. *Part I* contains general information to aid you in working with SAS/ETS Software. *Part II* explains the SAS procedures of SAS/ETS software. *Part III* describes the available data access interfaces for economic and financial databases. *Part IV* is the reference for the Time Series Forecasting System, an interactive forecasting menu system that uses PROC ARIMA and other routines to perform time series forecasting. Finally, *Part V* is the reference for the [Investment Analysis System](#).

The new features added to SAS/ETS software since the publication of *SAS/ETS Software: Changes and Enhancements for Release 8.2* are summarized in Chapter 1, "[What's New in SAS/ETS 9.3](#)." If you have used SAS/ETS software in the past, you may want to skim this chapter to see what's new.

Part I contains the following chapters.

[Chapter 2](#), the current chapter, provides an overview of SAS/ETS software and summarizes related SAS publications, products, and services.

Chapter 3, “[Working with Time Series Data](#),” discusses the use of SAS data management and programming features for time series data.

Chapter 4, “[Date Intervals, Formats, and Functions](#),” summarizes the time intervals, date and datetime informats, date and datetime formats, and date and datetime functions available in the SAS System.

Chapter 5, “[SAS Macros and Functions](#),” documents SAS macros and DATA step financial functions provided with SAS/ETS software. The macros use SAS/ETS procedures to perform Dickey-Fuller tests, test for the need for log transformations, or select optimal Box-Cox transformation parameters for time series data.

Chapter 6, “[Nonlinear Optimization Methods](#),” documents the NonLinear Optimization subsystem used by some ETS procedures to perform nonlinear optimization tasks.

Part II contains chapters that explain the SAS procedures that make up SAS/ETS software. These chapters appear in alphabetical order by procedure name.

Part III contains chapters that document the ETS access interfaces to economic and financial databases.

Each of the chapters that document the SAS/ETS procedures (*Part II*) and the SAS/ETS access interfaces (*Part III*) is organized as follows:

1. The “Overview” section gives a brief description of the procedure.
2. The “Getting Started” section provides a tutorial introduction on how to use the procedure.
3. The “Syntax” section is a reference to the SAS statements and options that control the procedure.
4. The “Details” section discusses various technical details.
5. The “Examples” section contains examples of the use of the procedure.
6. The “References” section contains technical references on methodology.

Part IV contains the chapters that document the features of the [Time Series Forecasting System](#).

Part V contains chapters that document the features of the [Investment Analysis System](#).

Typographical Conventions

This book uses several type styles for presenting information. The following list explains the meaning of the typographical conventions used in this book:

roman	is the standard type style used for most text.
UPPERCASE ROMAN	is used for SAS statements, options, and other SAS language elements when they appear in the text. However, you can enter these elements in your own SAS programs in lowercase, uppercase, or a mixture of the two.
UPPERCASE BOLD	is used in the “Syntax” sections’ initial lists of SAS statements and options.

<i>oblique</i>	is used for user-supplied values for options in the syntax definitions. In the text, these values are written in <i>italic</i> .
helvetica	is used for the names of variables and data sets when they appear in the text.
bold	is used to refer to matrices and vectors and to refer to commands.
<i>italic</i>	is used for terms that are defined in the text, for emphasis, and for references to publications.
bold monospace	is used for example code. In most cases, this book uses lowercase type for SAS statements.

Where to Turn for More Information

This section describes other sources of information about SAS/ETS software.

Accessing the SAS/ETS Sample Library

The SAS/ETS Sample Library includes many examples that illustrate the use of SAS/ETS software, including the examples used in this documentation. To access these sample programs, select **Help** from the menu and then select **SAS Help and Documentation**. From the **Contents** list, select the section **Sample SAS Programs** under **Learning to Use SAS**.

Online Help System

You can access online help information about SAS/ETS software in two ways, depending on whether you are using the SAS windowing environment in the command line mode or the pull-down menu mode.

If you are using a command line, you can access the SAS/ETS help menus by typing **help** on the SAS windowing environment command line. Or you can issue the command **help ARIMA** (or another procedure name) to display the help for that particular procedure.

If you are using the SAS windowing environment pull-down menus, you can pull-down the **Help** menu and make the following selections:

- **SAS Help and Documentation**
- **Learning to Use SAS** in the Contents list
- **SAS Products**
- **SAS/ETS**

The content of the Online Help System follows closely that of this book.

SAS Short Courses

The SAS Education Division offers a number of training courses that might be of interest to SAS/ETS users. Please check the SAS web site for the current list of available training courses.

SAS Technical Support Services

As with all SAS products, the SAS Technical Support staff is available to respond to problems and answer technical questions regarding the use of SAS/ETS software.

Major Features of SAS/ETS Software

The following sections briefly summarize major features of SAS/ETS software. See the chapters on individual procedures for more detailed information.

Discrete Choice and Qualitative and Limited Dependent Variable Analysis

The **MDC** procedure provides maximum likelihood (ML) or simulated maximum likelihood estimates of multinomial discrete choice models in which the choice set consists of unordered multiple alternatives.

The MDC procedure supports the following models and features:

- conditional logit
- nested logit
- heteroscedastic extreme value
- multinomial probit
- mixed logit
- pseudo-random or quasi-random numbers for simulated maximum likelihood estimation
- bounds imposed on the parameter estimates
- linear restrictions imposed on the parameter estimates

- SAS data set containing predicted probabilities and linear predictor ($\mathbf{x}'\boldsymbol{\beta}$) values
- decision tree and nested logit
- model fit and goodness-of-fit measures including
 - likelihood ratio
 - Aldrich-Nelson
 - Cragg-Uhler 1
 - Cragg-Uhler 2
 - Estrella
 - Adjusted Estrella
 - McFadden's LRI
 - Veall-Zimmermann
 - Akaike Information Criterion (AIC)
 - Schwarz Criterion or Bayesian Information Criterion (BIC)

The **QLIM** procedure analyzes univariate and multivariate limited dependent variable models where dependent variables take discrete values or dependent variables are observed only in a limited range of values. This procedure includes logit, probit, Tobit, and general simultaneous equations models. The QLIM procedure supports the following models:

- linear regression model with heteroscedasticity
- probit with heteroscedasticity
- logit with heteroscedasticity
- Tobit (censored and truncated) with heteroscedasticity
- Box-Cox regression with heteroscedasticity
- bivariate probit
- bivariate Tobit
- sample selection models
- multivariate limited dependent models

The **COUNTREG** procedure provides regression models in which the dependent variable takes nonnegative integer count values. The COUNTREG procedure supports the following models:

- Poisson regression
- negative binomial regression with quadratic and linear variance functions
- zero inflated Poisson (ZIP) model

- zero inflated negative binomial (ZINB) model
- fixed and random effect Poisson panel data models
- fixed and random effect NB (negative binomial) panel data models

The **PANEL** procedure deals with panel data sets that consist of time series observations on each of several cross-sectional units.

The models and methods the PANEL procedure uses to analyze are as follows:

- one-way and two-way models
- fixed and random effects
- autoregressive models
 - the Parks method
 - dynamic panel estimator
 - the Da Silva method for moving-average disturbances

Regression with Autocorrelated and Heteroscedastic Errors

The **AUTOREG** procedure provides regression analysis and forecasting of linear models with autocorrelated or heteroscedastic errors. The AUTOREG procedure includes the following features:

- estimation and prediction of linear regression models with autoregressive errors
- any order autoregressive or subset autoregressive process
- optional stepwise selection of autoregressive parameters
- choice of the following estimation methods:
 - exact maximum likelihood
 - exact nonlinear least squares
 - Yule-Walker
 - iterated Yule-Walker
- tests for any linear hypothesis that involves the structural coefficients
- restrictions for any linear combination of the structural coefficients
- forecasts with confidence limits
- estimation and forecasting of ARCH (autoregressive conditional heteroscedasticity), GARCH (generalized autoregressive conditional heteroscedasticity), I-GARCH (integrated GARCH), E-GARCH (exponential GARCH), and GARCH-M (GARCH in mean) models

- combination of ARCH and GARCH models with autoregressive models, with or without regressors
- estimation and testing of general heteroscedasticity models
- variety of model diagnostic information including the following:
 - autocorrelation plots
 - partial autocorrelation plots
 - Durbin-Watson test statistic and generalized Durbin-Watson tests to any order
 - Durbin h and Durbin t statistics
 - Akaike information criterion
 - Schwarz information criterion
 - tests for ARCH errors
 - Ramsey's RESET test
 - Chow and PChow tests
 - Phillips-Perron stationarity test
 - CUSUM and CUMSUMSQ statistics
- exact significance levels (p -values) for the Durbin-Watson statistic
- embedded missing values

Simultaneous Systems Linear Regression

The [SYSLIN](#) and [ENTROPY](#) procedures provide regression analysis of a simultaneous system of linear equations.

The [SYSLIN](#) procedure includes the following features:

- estimation of parameters in simultaneous systems of linear equations
- full range of estimation methods including the following:
 - ordinary least squares (OLS)
 - two-stage least squares (2SLS)
 - three-stage least squares (3SLS)
 - iterated 3SLS (IT3SLS)
 - seemingly unrelated regression (SUR)
 - iterated SUR (ITSUR)
 - limited-information maximum likelihood (LIML)
 - full-information maximum likelihood (FIML)
 - minimum expected loss (MELO)

- general K-class estimators
- weighted regression
- any number of restrictions for any linear combination of coefficients, within a single model or across equations
- tests for any linear hypothesis, for the parameters of a single model or across equations
- wide range of model diagnostics and statistics including the following:
 - usual ANOVA tables and R-square statistics
 - Durbin-Watson statistics
 - standardized coefficients
 - test for overidentifying restrictions
 - residual plots
 - standard errors and t tests
 - covariance and correlation matrices of parameter estimates and equation errors
- predicted values, residuals, parameter estimates, and variance-covariance matrices saved in output SAS data sets
- other features of the SYSLIN procedure that enable you to do the following:
 - impose linear restrictions on the parameter estimates
 - test linear hypotheses about the parameters
 - write predicted and residual values to an output SAS data set
 - write parameter estimates to an output SAS data set
 - write the crossproducts matrix (SSCP) to an output SAS data set
 - use raw data, correlations, covariances, or cross products as input

The **ENTROPY** procedure supports the following models and features:

- generalized maximum entropy (GME) estimation
- generalized cross entropy (GCE) estimation
- normed moment generalized maximum entropy
- maximum entropy-based seemingly unrelated regression (MESUR) estimation
- pure inverse estimation
- estimation of parameters in simultaneous systems of linear equations
- Markov models
- unordered multinomial choice problems

- weighted regression
- any number of restrictions for any linear combination of coefficients, within a single model or across equations
- tests for any linear hypothesis, for the parameters of a single model or across equations

Linear Systems Simulation

The **SIMLIN** procedure performs simulation and multiplier analysis for simultaneous systems of linear regression models. The SIMLIN procedure includes the following features:

- reduced form coefficients
- interim multipliers
- total multipliers
- dynamic multipliers
- multipliers for higher order lags
- dynamic forecasts and simulations
- goodness-of-fit statistics
- acceptance of the equation system coefficients estimated by the SYSLIN procedure as input

Polynomial Distributed Lag Regression

The **PDLREG** procedure provides regression analysis for linear models with polynomial distributed (Almon) lags. The PDLREG procedure includes the following features:

- entry of any number of regressors as a polynomial lag distribution and the use of any number of covariates
- use of any order lag length and degree polynomial for lag distribution
- optional upper and lower endpoint restrictions
- specification of any number of linear restrictions on covariates
- option to repeat analysis over a range of degrees for the lag distribution polynomials
- support for autoregressive errors to any lag
- forecasts with confidence limits

Nonlinear Systems Regression and Simulation

The **MODEL** procedure provides parameter estimation, simulation, and forecasting of dynamic nonlinear simultaneous equation models. The MODEL procedure includes the following features:

- nonlinear regression analysis for systems of simultaneous equations, including weighted nonlinear regression
- full range of parameter estimation methods including the following:
 - nonlinear ordinary least squares (OLS)
 - nonlinear seemingly unrelated regression (SUR)
 - nonlinear two-stage least squares (2SLS)
 - nonlinear three-stage least squares (3SLS)
 - iterated SUR
 - iterated 3SLS
 - generalized method of moments (GMM)
 - nonlinear full-information maximum likelihood (FIML)
 - simulated method of moments (SMM)
- supports dynamic multi-equation nonlinear models of any size or complexity
- uses the full power of the SAS programming language for model definition, including left-hand-side expressions
- hypothesis tests of nonlinear functions of the parameter estimates
- linear and nonlinear restrictions of the parameter estimates
- bounds imposed on the parameter estimates
- computation of estimates and standard errors of nonlinear functions of the parameter estimates
- estimation and simulation of ordinary differential equations (ODE's)
- vector autoregressive error processes and polynomial lag distributions easily specified for the nonlinear equations
- variance modeling (ARCH, GARCH, and others)
- computation of goal-seeking solutions of nonlinear systems to find input values needed to produce target outputs
- dynamic, static, or n -period-ahead-forecast simulation modes
- simultaneous solution or single equation solution modes
- Monte Carlo simulation using parameter estimate covariance and across-equation residuals covariance matrices or user-specified random functions

- a variety of diagnostic statistics including the following
 - model R-square statistics
 - general Durbin-Watson statistics and exact p -values
 - asymptotic standard errors and t tests
 - first-stage R-square statistics
 - covariance estimates
 - collinearity diagnostics
 - simulation goodness-of-fit statistics
 - Theil inequality coefficient decompositions
 - Theil relative change forecast error measures
 - heteroscedasticity tests
 - Godfrey test for serial correlation
 - Hausman specification test
 - Chow tests
- block structure and dependency structure analysis for the nonlinear system
- listing and cross-reference of fitted model
- automatic calculation of needed derivatives by using exact analytic formula
- efficient sparse matrix methods used for model solution; choice of other solution methods

Model definition, parameter estimation, simulation, and forecasting can be performed interactively in a single SAS session or models can also be stored in files and reused and combined in later runs.

ARIMA (Box-Jenkins) and ARIMAX (Box-Tiao) Modeling and Forecasting

The **ARIMA** procedure provides the identification, parameter estimation, and forecasting of autoregressive integrated moving-average (Box-Jenkins) models, seasonal ARIMA models, transfer function models, and intervention models. The ARIMA procedure includes the following features:

- complete ARIMA (Box-Jenkins) modeling with no limits on the order of autoregressive or moving-average processes
- model identification diagnostics including the following:
 - autocorrelation function
 - partial autocorrelation function
 - inverse autocorrelation function
 - cross-correlation function

- extended sample autocorrelation function
- minimum information criterion for model identification
- squared canonical correlations
- stationarity tests
- outlier detection
- intervention analysis
- regression with ARMA errors
- transfer function modeling with fully general rational transfer functions
- seasonal ARIMA models
- ARIMA model-based interpolation of missing values
- several parameter estimation methods including the following:
 - exact maximum likelihood
 - conditional least squares
 - exact nonlinear unconditional least squares (ELS or ULS)
- prewhitening transformations
- forecasts and confidence limits for all models
- forecasting tied to parameter estimation methods: finite memory forecasts for models estimated by maximum likelihood or exact nonlinear least squares methods and infinite memory forecasts for models estimated by conditional least squares
- diagnostic statistics to help judge the adequacy of the model including the following:
 - Akaike's information criterion (AIC)
 - Schwarz's Bayesian criterion (SBC or BIC)
 - Box-Ljung chi-square test statistics for white-noise residuals
 - autocorrelation function of residuals
 - partial autocorrelation function of residuals
 - inverse autocorrelation function of residuals
 - automatic outlier detection

Vector Time Series Analysis

The **VARMAX** procedure enables you to model the dynamic relationship both between the dependent variables and between the dependent and independent variables. The VARMAX procedure includes the following features:

- several modeling features:
 - vector autoregressive model
 - vector autoregressive model with exogenous variables
 - vector autoregressive and moving-average model
 - Bayesian vector autoregressive model
 - vector error correction model
 - Bayesian vector error correction model
 - GARCH-type multivariate conditional heteroscedasticity models
- criteria for automatically determining AR and MA orders:
 - Akaike information criterion (AIC)
 - corrected AIC (AICC)
 - Hannan-Quinn (HQ) criterion
 - final prediction error (FPE)
 - Schwarz Bayesian criterion (SBC), also known as Bayesian information criterion (BIC)
- AR order identification aids:
 - partial cross-correlations
 - Yule-Walker estimates
 - partial autoregressive coefficients
 - partial canonical correlations
- testing the presence of unit roots and cointegration:
 - Dickey-Fuller tests
 - Johansen cointegration test for nonstationary vector processes of integrated order one
 - Stock-Watson common trends test for the possibility of cointegration among nonstationary vector processes of integrated order one
 - Johansen cointegration test for nonstationary vector processes of integrated order two
- model parameter estimation methods:
 - least squares (LS)
 - maximum likelihood (ML)
- model checks and residual analysis using the following tests:
 - Durbin-Watson (DW) statistics
 - F test for autoregressive conditional heteroscedastic (ARCH) disturbance
 - F test for AR disturbance
 - Jarque-Bera normality test
 - Portmanteau test

- seasonal deterministic terms
- subset models
- multiple regression with distributed lags
- dead-start model that does not have present values of the exogenous variables
- Granger-causal relationships between two distinct groups of variables
- infinite order AR representation
- impulse response function (or infinite order MA representation)
- decomposition of the predicted error covariances
- roots of the characteristic functions for both the AR and MA parts to evaluate the proximity of the roots to the unit circle
- contemporaneous relationships among the components of the vector time series
- forecasts
- conditional covariances for GARCH models

State Space Modeling and Forecasting

The **STATESPACE** procedure provides automatic model selection, parameter estimation, and forecasting of state space models. (*State space models* encompass an alternative general formulation of multivariate ARIMA models.) The STATESPACE procedure includes the following features:

- multivariate ARIMA modeling by using the general state space representation of the stochastic process
- automatic model selection using Akaike's information criterion (AIC)
- user-specified state space models including restrictions
- transfer function models with random inputs
- any combination of simple and seasonal differencing; input series can be differenced to any order for any lag lengths
- forecasts with confidence limits
- ability to save selected and fitted model in a data set and reuse for forecasting
- wide range of output options including the ability to print any statistics concerning the data and their covariance structure, the model selection process, and the final model fit

Spectral Analysis

The **SPECTRA** procedure provides spectral analysis and cross-spectral analysis of time series. The **SPECTRA** procedure includes the following features:

- efficient calculation of periodogram and smoothed periodogram using fast finite Fourier transform and Chirp-Z algorithms
- multiple spectral analysis, including raw and smoothed spectral and cross-spectral function estimates, with user-specified window weights
- choice of kernel for smoothing
- output of the following spectral estimates to a SAS data set:
 - Fourier sine and cosine coefficients
 - periodogram
 - smoothed periodogram
 - cospectrum
 - quadrature spectrum
 - amplitude
 - phase spectrum
 - squared coherency
- Fisher's Kappa and Bartlett's Kolmogorov-Smirnov test statistic for testing a null hypothesis of white noise

Seasonal Adjustment

The **X11** procedure provides seasonal adjustment of time series by using the Census X-11 or X-11 ARIMA method. The X11 procedure is based on the U.S. Bureau of the Census X-11 seasonal adjustment program and also supports the X-11 ARIMA method developed by Statistics Canada. The X11 procedure includes the following features:

- decomposition of monthly or quarterly series into seasonal, trend, trading day, and irregular components
- both multiplicative and additive form of the decomposition
- all the features of the Census Bureau program
- support of the X-11 ARIMA method
- support of sliding spans analysis

- processing of any number of variables at once with no maximum length for a series
- computation of tests for stable, moving, and combined seasonality
- optional printing or storing in SAS data sets of the individual X11 tables that show the various components at different stages of the computation; full control over what is printed or output
- ability to project seasonal component one year ahead, which enables reintroduction of seasonal factors for an extrapolated series

The **X12** procedure provides seasonal adjustment of time series using the X-12 ARIMA method. The X12 procedure is based on the U.S. Bureau of the Census X-12 ARIMA seasonal adjustment program (version 0.3). It also supports the X-11 ARIMA method developed by Statistics Canada and the previous X-11 method of the U.S. Census Bureau. The X12 procedure includes the following features:

- decomposition of monthly or quarterly series into seasonal, trend, trading day, and irregular components
- support of multiplicative, additive, pseudo-additive, and log additive forms of decomposition
- support of the X-12 ARIMA method
- support of regARIMA modeling
- automatic identification of outliers
- support of TRAMO-based automatic model selection
- use of regressors to process missing values within the span of the series
- processing of any number of variables at once with no maximum length for a series
- computation of tests for stable, moving, and combined seasonality
- spectral analysis of original, seasonally adjusted, and irregular series
- optional printing or storing in a SAS data set of the individual X11 tables that show the various components at different stages of the decomposition; full control over what is printed or output
- optional projection of seasonal component one year ahead, which enables reintroduction of seasonal factors for an extrapolated series

Structural Time Series Modeling and Forecasting

The **UCM** procedure provides a flexible environment for analyzing time series data using structural time series models, also called unobserved components models (UCM). These models represent the observed series as a sum of suitably chosen components such as trend, seasonal, cyclical, and regression effects. You can use the UCM procedure to formulate comprehensive models that bring out all the salient features of the series under consideration. Structural models are applicable in the same situations where Box-Jenkins ARIMA models are applicable; however, the structural models tend to be more informative about the underlying stochastic structure of the series. The UCM procedure includes the following features:

- general unobserved components modeling where the models can include trend, multiple seasons and cycles, and regression effects
- maximum-likelihood estimation of the model parameters
- model diagnostics that include a variety of goodness-of-fit statistics, and extensive graphical diagnosis of the model residuals
- forecasts and confidence limits for the series and all the model components
- Model-based seasonal decomposition
- extensive plotting capability that includes the following:
 - forecast and confidence interval plots for the series and model components such as trend, cycles, and seasons
 - diagnostic plots such as residual plot, residual autocorrelation plots, and so on
 - seasonal decomposition plots such as trend, trend plus cycles, trend plus cycles plus seasons, and so on
- model-based interpolation of series missing values
- full sample (also called smoothed) estimates of the model components

Time Series Cross-Sectional Regression Analysis

The **TSCSREG** procedure provides combined time series cross-sectional regression analysis. The TSC-SREG procedure includes the following features:

- estimation of the regression parameters under several common error structures:
 - Fuller and Battese method (variance component model)
 - Wansbeek-Kapteyn method
 - Parks method (autoregressive model)
 - Da Silva method (mixed variance component moving-average model)
 - one-way fixed effects
 - two-way fixed effects
 - one-way random effects
 - two-way random effects
- any number of model specifications
- unbalanced panel data for the fixed or random-effects models
- variety of estimates and statistics including the following:

- underlying error components estimates
- regression parameter estimates
- standard errors of estimates
- t -tests
- R-square statistic
- correlation matrix of estimates
- covariance matrix of estimates
- autoregressive parameter estimate
- cross-sectional components estimates
- autocovariance estimates
- F tests of linear hypotheses about the regression parameters
- specification tests

Automatic Time Series Forecasting

The **ESM** procedure provides a quick way to generate forecasts for many time series or transactional data in one step by using exponential smoothing methods. All parameters associated with the forecasting model are optimized based on the data.

You can use the following smoothing models:

- simple
- double
- linear
- damped trend
- seasonal
- Winters method (additive and multiplicative)

Additionally, PROC ESM can transform the data before applying the smoothing methods using any of these transformations:

- log
- square root
- logistic
- Box-Cox

In addition to forecasting, the ESM procedure can also produce graphic output.

The ESM procedure can forecast both time series data, whose observations are equally spaced at a specific time interval (for example, monthly, weekly), or transactional data, whose observations are not spaced with respect to any particular time interval. (Internet, inventory, sales, and similar data are typical examples of transactional data. For transactional data, the data are accumulated based on a specified time interval to form a time series.)

The ESM procedure is a replacement for the older FORECAST procedure. ESM is often more convenient to use than PROC FORECAST but it supports only exponential smoothing models.

The **FORECAST** procedure provides forecasting of univariate time series using automatic trend extrapolation. PROC FORECAST is an easy-to-use procedure for automatic forecasting and uses simple popular methods that do not require statistical modeling of the time series, such as exponential smoothing, time trend with autoregressive errors, and the Holt-Winters method.

The FORECAST procedure supplements the powerful forecasting capabilities of the econometric and time series analysis procedures described previously. You can use PROC FORECAST when you have many series to forecast and you want to extrapolate trends without developing a model for each series.

The FORECAST procedure includes the following features:

- choice of the following forecasting methods:
 - EXPO method—exponential smoothing: single, double, triple, or Holt two-parameter smoothing
 - exponential smoothing as an ARIMA Model
 - WINTERS method—using updating equations similar to exponential smoothing to fit model parameters
 - ADDWINTERS method—like the WINTERS method except that the seasonal parameters are added to the trend instead of multiplied with the trend
 - STEPARE method—stepwise autoregressive models with constant, linear, or quadratic trend and autoregressive errors to any order
 - Holt-Winters forecasting method with constant, linear, or quadratic trend
 - additive variant of the Holt-Winters method
- support for up to three levels of seasonality for Holt-Winters method: time-of-year, day-of-week, or time-of-day
- ability to forecast any number of variables at once
- forecast confidence limits for all methods

Time Series Interpolation and Frequency Conversion

The **EXPAND** procedure provides time interval conversion and missing value interpolation for time series. The EXPAND procedure includes the following features:

- conversion of time series frequency; for example, constructing quarterly estimates from annual series or aggregating quarterly values to annual values
- conversion of irregular observations to periodic observations
- interpolation of missing values in time series
- conversion of observation types; for example, estimate stocks from flows and vice versa. All possible conversions are supported between any of the following:
 - beginning of period
 - end of period
 - period midpoint
 - period total
 - period average
- conversion of time series phase shift; for example, conversion between fiscal years and calendar years
- identifying observations including the following:
 - identification of the time interval of the input values
 - validation of the input data set observations
 - computation of the ID values for the observations in the output data set
- choice of four interpolation methods:
 - cubic splines
 - linear splines
 - step functions
 - simple aggregation
- ability to perform extrapolation by a linear projection of the trend of the cubic spline curve fit to the input data
- ability to transform series before and after interpolation (or without interpolation) by using any of the following:
 - constant shift or scale
 - sign change or absolute value
 - logarithm, exponential, square root, square, logistic, inverse logistic
 - lags, leads, differences

- classical decomposition
 - bounds, trims, reverse series
 - centered moving, cumulative, or backward moving average
 - centered moving, cumulative, or backward moving range
 - centered moving, cumulative, or backward moving geometric mean
 - centered moving, cumulative, or backward moving maximum
 - centered moving, cumulative, or backward moving median
 - centered moving, cumulative, or backward moving minimum
 - centered moving, cumulative, or backward moving product
 - centered moving, cumulative, or backward moving corrected sum of squares
 - centered moving, cumulative, or backward moving uncorrected sum of squares
 - centered moving, cumulative, or backward moving rank
 - centered moving, cumulative, or backward moving standard deviation
 - centered moving, cumulative, or backward moving sum
 - centered moving, cumulative, or backward moving median
 - centered moving, cumulative, or backward moving t -value
 - centered moving, cumulative, or backward moving variance
- support for a wide range of time series frequencies:
 - YEAR
 - SEMIYEAR
 - QUARTER
 - MONTH
 - SEMIMONTH
 - TENDAY
 - WEEK
 - WEEKDAY
 - DAY
 - HOUR
 - MINUTE
 - SECOND
 - support for repeating or shifting the basic interval types to define a great variety of different frequencies, such as fiscal years, biennial periods, work shifts, and so forth

Refer to Chapter 3, “[Working with Time Series Data](#),” and Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about time series data transformations.

Trend and Seasonal Analysis on Transaction Databases

The **TIMESERIES** procedure can accumulate transactional data to time series and perform trend and seasonal analysis on the accumulated time series.

Time series analyses performed by the **TIMESERIES** procedure include the follows:

- descriptive statistics relevant for time series data
- seasonal decomposition and seasonal adjustment analysis
- correlation analysis
- cross-correlation analysis

The **TIMESERIES** procedure includes the following features:

- ability to process large amounts of time-stamped transactional data
- statistical methods useful for large-scale time series analysis or (temporal) data mining
- output data sets stored in either a time series format (default) or a coordinate format (transposed)

The **TIMESERIES** procedure is normally used to prepare data for subsequent analysis that uses other SAS/ETS procedures or other parts of the SAS system. The time series format is most useful when the data are to be analyzed with SAS/ETS procedures. The coordinate format is most useful when the data are to be analyzed with SAS/STAT[®] procedures or SAS Enterprise Miner[™]. (For example, clustering time-stamped transactional data can be achieved by using the results of **TIMESERIES** procedure

re with the clustering procedures of SAS/STAT and the nodes of SAS Enterprise Miner.)

Access to Financial and Economic Databases

The **DATASOURCE** procedure and the SAS/ETS data access interface LIBNAME Engines (**SASECRSP**, **SASEFAME**, **SASEHAVR** and **SASEXCCM**) provide seamless, efficient access to time series data from data files supplied by a variety of commercial and governmental data vendors.

The **DATASOURCE** procedure includes the following features:

- support for data files distributed by the following data vendors:
 - DRI/McGraw-Hill
 - FAME Information Services
 - HAVER ANALYTICS
 - Standard & Poors Compustat Service

- Center for Research in Security Prices (CRSP)
- International Monetary Fund
- U.S. Bureau of Labor Statistics
- U.S. Bureau of Economic Analysis
- Organization for Economic Cooperation and Development (OECD)
- ability to select the series, frequency, time range, and cross sections of extracted data
- ability to create an output data set containing descriptive information on the series available in the data file
- ability to read EBCDIC data on ASCII systems and vice versa

The [SASECRSP](#) interface LIBNAME engine includes the following features:

- enables random access to time series data residing in CRSPAccess databases
- provides a seamless interface between CRSP and SAS data processing
- uses the LIBNAME statement to enable you to specify which time series you would like to read from the CRSPAccess database, and how you would like to perform selection
- enables you access to CRSP Stock, CRSP/COMPUSTAT Merged (CCM) or CRSP Indices Data.
- provides convenient formats, informats, and functions for CRSP and SAS datetime conversions

The [SASEFAME](#) interface LIBNAME engine includes the following features:

- provides SAS and FAME users flexibility in accessing and processing time series data, case series, and formulas that reside in either a FAME database or a SAS data set
- provides a seamless interface between FAME and SAS data processing
- uses the LIBNAME statement to enable you to specify which time series you would like to read from the FAME database
- enables you to convert the selected time series to the same time scale
- works with the SAS DATA step to perform further subsetting and to store the resulting time series into a SAS data set
- performs more analysis if desired either in the same SAS session or in another session at a later time
- supports the FAME CROSSLIST function for subsetting via BYGROUPS using the CROSSLIST= option
 - you can use a FAME namelist that contains your BY variables for selection in the CROSSLIST
 - you can use a SAS input dataset, INSET, that contains the BY selection variables along with the WHERE= option in your SASEFAME libref

- supports the use of FAME in a client/server environment that uses the FAME CHLI capability on your FAME server
- enables access to your FAME remote data when you specify the port number of the TCP/IP service that is defined for your FAME server and the node name of your FAME master server in your SASE-FAME libref's physical path

The [SASEHAVR](#) interface LIBNAME engine includes the following features:

- enables Windows users random access to economic and financial data residing in a HAVER ANALYTICS Data Link Express (DLX) database
- the following types of HAVER data sets are available:
 - United States Economic Indicators
 - Specialized Databases
 - Financial Indicators
 - Industry
 - Industrial Countries
 - Emerging Markets
 - International Organizations
 - Forecasts and As Reported Data
 - United States Regional
- enables you to limit the range of data that is read from the time series
- enables you to specify a desired conversion frequency. Start dates are recommended on the LIBNAME statement to help you save resources when processing large databases or when processing a large number of observations.
- enables you to use the WHERE, KEEP, or DROP statements in your DATA step to further subset your data
- supports use of the SQL procedure to create a view of your resulting SAS data set

The [SASEXCCM](#) interface LIBNAME engine includes the following experimental features:

- enables random access to time series data residing in CRSPAccess databases
- provides a seamless interface between CRSP, Compustat XpressFeed and SAS data processing
- uses the LIBNAME statement to enable you to specify which data items, data groups and time series you would like to read from the CRSPAccess database, and how you would like to perform selection
- supports data-item-handling access methods to CRSP Stock (STK), CRSP/COMPUSTAT Merged (CCM), CRSP Indices (IND) or CRSP Treasury (TRS) Data.
- provides selection based on keys such as GVKEY, PERMNO, INDNO, TREASNO, and TCUSIP for efficient access to data items.

Spreadsheet Calculations and Financial Report Generation

The **COMPUTAB** procedure generates tabular reports using a programmable data table.

The **COMPUTAB** procedure is especially useful when you need both the power of a programmable spreadsheet and a report-generation system and you want to set up a program to run in batch mode and generate routine reports. The **COMPUTAB** procedure includes the following features:

- report generation facility for creating tabular reports such as income statements, balance sheets, and other row and column reports for analyzing business or time series data
- ability to tailor report format to almost any desired specification
- use of the SAS programming language to provide complete control of the calculation and format of each item of the report
- ability to report definition in terms of a data table on which programming statements operate
- ability for a single reference to a row or column to bring the entire row or column into a calculation
- ability to create new rows and columns (such as totals, subtotals, and ratios) with a single programming statement
- access to individual table values when needed
- built-in features to provide consolidation reports over summarization variables

Loan Analysis, Comparison, and Amortization

The **LOAN** procedure provides analysis and comparison of mortgages and other installment loans; it includes the following features:

- ability to specify contract terms for any number of different loans and ability to analyze and compare various financing alternatives
- analysis of four different types of loan contracts including the following:
 - fixed rate
 - adjustable rate
 - buy-down rate
 - balloon payment
- full control over adjustment terms for adjustable rate loans: life caps, adjustment frequency, and maximum and minimum rates
- support for a wide variety of payment and compounding intervals

- ability to incorporate initialization costs, discount points, down payments, and prepayments (uniform or lump-sum) in loan calculations
- analysis of different rate adjustment scenarios for variable rate loans including the following:
 - worst case
 - best case
 - fixed rate case
 - estimated case
- ability to make loan comparisons at different points in time
- ability to make loan comparisons at each analysis date on the basis of five different economic criteria:
 - present worth of cost (net present value of all payments to date)
 - true interest rate (internal rate of return to date)
 - current periodic payment
 - total interest paid to date
 - outstanding balance
- ability to base loan comparisons on either after-tax or before-tax analysis
- report of the best alternative when loans of equal amount are compared
- amortization schedules for each loan contract
- output that shows payment dates, rather than just payment sequence numbers, when starting date is specified
- optional printing or output of the amortization schedules, loan summaries, and loan comparison information to SAS data sets
- ability to specify rounding of payments to any number of decimal places

Time Series Forecasting System

SAS/ETS software includes the [Time Series Forecasting System](#), a point-and-click application for exploring and analyzing univariate time series data. You can use the automatic model selection facility to select the best-fitting model for each time series, or you can use the system's diagnostic features and time series modeling tools interactively to develop forecasting models customized to best predict your time series. The system provides both graphical and statistical features to help you choose the best forecasting method for each series.

The system can be invoked by selecting **Analysis►Solutions**, by the FORECAST command, and by clicking the **Forecasting** icon in the Data Analysis folder of the SAS Desktop.

The following is a brief summary of the features of the Time Series Forecasting system. With the system you can:

- use a wide variety of forecasting methods, including several kinds of exponential smoothing models, Winters method, and ARIMA (Box-Jenkins) models. You can also produce forecasts by combining the forecasts from several models.
- use predictor variables in forecasting models. Forecasting models can include time trend curves, regressors, intervention effects (dummy variables), adjustments you specify, and dynamic regression (transfer function) models.
- view plots of the data, predicted versus actual values, prediction errors, and forecasts with confidence limits. You can plot changes or transformations of series, zoom in on parts of the graphs, or plot autocorrelations.
- use hold-out samples to select the best forecasting method
- compare goodness-of-fit measures for any two forecasting models side-by-side or list all models sorted by a particular fit statistic
- view the predictions and errors for each model in a spreadsheet or view and compare the forecasts from any two models in a spreadsheet
- examine the fitted parameters of each forecasting model and their statistical significance
- control the automatic model selection process: the set of forecasting models considered, the goodness-of-fit measure used to select the best model, and the time period used to fit and evaluate models
- customize the system by adding forecasting models for the automatic model selection process and for point-and-click manual selection
- save your work in a project catalog
- print an audit trail of the forecasting process
- save and print system output including spreadsheets and graphs

Investment Analysis System

The [Investment Analysis System](#) is an interactive environment for analyzing the time-value of money for a variety of investments:

- loans
- savings
- depreciations
- bonds
- generic cash flows

Various tools are provided to help analyze the value of investment alternatives: time value, periodic equivalent, internal rate of return, benefit-cost ratio, and breakeven analysis.

These analyses can help answer a number of questions you might have about your investments:

- Which option is more profitable or less costly?
- Is it better to buy or rent?
- Are the extra fees for refinancing at a lower interest rate justified?
- What is the balance of this account after saving this amount periodically for so many years?
- How much is legally tax-deductible?
- Is this a reasonable price?

Investment Analysis can be beneficial to users in many industries for a variety of decisions:

- manufacturing: cost justification of automation or any capital investment, replacement analysis of major equipment, or economic comparison of alternative designs
- government: setting funds for services
- finance: investment analysis and portfolio management for fixed-income securities

ODS Graphics

Many SAS/ETS procedures produce graphical output using the SAS Output Delivery System (ODS). The ODS Graphics system provides several advantages:

- Plots and graphs are output objects in the Output Delivery System (ODS) and can be manipulated with ODS commands.
- There is no need to write SAS/GRAPH statements or use special plotting macros.
- There are multiple formats to choose from: html, gif, and rtf.
- Templates control the appearance of plots.
- Styles control the color scheme.
- You can edit or create templates and styles for all graphs.

To enable graphical output from SAS/ETS procedures, you must use the following statement in your SAS program.

```
ods graphics on;
```

The graphical output produced by many SAS/ETS procedures can be controlled using the PLOTS= option on the PROC statement.

For more information about the features of the ODS Graphics system, including the many ways that you can control or customize the plots produced by SAS procedures, refer to Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*). For more information about the SAS Output Delivery system, refer to the *SAS Output Delivery System: User’s Guide*.

Related SAS Software

Many features not found in SAS/ETS software are available in other parts of the SAS System, such as Base SAS®, SAS® Forecast Server, SAS/STAT® software, SAS/OR® software, SAS/QC® software, SAS® Stat Studio, and SAS/IML® software.

If you do not find something you need in SAS/ETS software, you might be able to find it in SAS/STAT software and in Base SAS software. If you still do not find it, look in other SAS software products or contact SAS Technical Support staff.

The following subsections summarize the features of other SAS products that might be of interest to users of SAS/ETS software.

Base SAS Software

The features provided by SAS/ETS software are extensions to the features provided by Base SAS software. Many data management and reporting capabilities you need are part of Base SAS software. Refer to *SAS Language Reference: Dictionary* and *Base SAS Procedures Guide* for documentation of Base SAS software. In particular, refer to *Base SAS Procedures Guide: Statistical Procedures* for information about statistical analysis features included with Base SAS.

The following sections summarize Base SAS software features of interest to users of SAS/ETS software. See Chapter 3, “[Working with Time Series Data](#),” for further discussion of some of these topics as they relate to time series data and SAS/ETS software.

SAS DATA Step

The DATA step is your primary tool for reading and processing data in the SAS System. The DATA step provides a powerful general purpose programming language that enables you to perform all kinds of data processing tasks. The DATA step is documented in *SAS Language Reference: Dictionary*.

Base SAS Procedures

Base SAS software includes many useful SAS procedures, which are documented in *Base SAS Procedures Guide* and *Base SAS Procedures Guide: Statistical Procedures*. The following is a list of Base SAS procedures you might find useful:

CATALOG	for managing SAS catalogs
CHART	for printing charts and histograms
COMPARE	for comparing SAS data sets
CONTENTS	for displaying the contents of SAS data sets
COPY	for copying SAS data sets
CORR	for computing correlations
CPORT	for moving SAS data libraries between computer systems
DATASETS	for deleting or renaming SAS data sets
FCMP	for compiling functions for use in SAS programs. The SAS Function Compiler Procedure (FCMP) enables you to create, test, and store SAS functions and subroutines before you use them in other SAS procedures. PROC FCMP accepts slight variations of DATA step statements, and most features of the SAS programming language can be used in functions and subroutines that are processed by PROC FCMP.
FREQ	for computing frequency crosstabulations
MEANS	for computing descriptive statistics and summarizing or collapsing data over cross sections
PLOT	for printing scatter plots
PRINT	for printing SAS data sets
PROTO	for accessing external functions from the SAS system. The PROTO procedure enables you to register external functions that are written in the C or C++ programming languages. You can use these functions in SAS as well as in C-language structures and types. After the C-language functions are registered in PROC PROTO, they can be called from any SAS function or subroutine that is declared in the FCMP procedure, as well as from any SAS function, subroutine, or method block that is declared in the COMPILE procedure.
RANK	for computing rankings or order statistics
SORT	for sorting SAS data sets
SQL	for processing SAS data sets with Structured Query Language
STANDARD	for standardizing variables to a fixed mean and variance
TABULATE	for printing descriptive statistics in tabular format
TIMEPLOT	for plotting variables over time
TRANSPOSE	for transposing SAS data sets
UNIVARIATE	for computing descriptive statistics

Global Statements

Global statements can be specified anywhere in your SAS program, and they remain in effect until changed. Global statements are documented in *SAS Language Reference: Dictionary*. You may find the following SAS global statements useful:

FILENAME	for accessing data files
FOOTNOTE	for printing footnote lines at the bottom of each page
%INCLUDE	for including files of SAS statements
LIBNAME	for accessing SAS data libraries
OPTIONS	for setting various SAS system options
QUIT	for ending an interactive procedure step
RUN	for executing the preceding SAS statements
TITLE	for printing title lines at the top of each page
X	for issuing host operating system commands from within your SAS session

Some Base SAS statements can be used with any SAS procedure, including SAS/ETS procedures. These statements are not global, and they affect only the SAS procedure they are used with. These statements are documented in *SAS Language Reference: Dictionary*.

The following Base SAS statements are useful with SAS/ETS procedures:

BY	for computing separate analyses for groups of observations
FORMAT	for assigning formats to variables
LABEL	for assigning descriptive labels to variables
WHERE	for subsetting data to restrict the range of data processed or to select or exclude observations from the analysis

SAS Functions

SAS functions can be used in DATA step programs and in the COMPUTAB and MODEL procedures. The following kinds of functions are available:

- character functions for manipulating character strings
- date and time functions for performing date and calendar calculations
- financial functions for performing financial calculations such as depreciation, net present value, periodic savings, and internal rate of return
- lagging and differencing functions for computing lags and differences
- mathematical functions for computing data transformations and other mathematical calculations

- probability functions for computing quantiles of statistical distributions and the significance of test statistics
- random number functions for simulation experiments
- sample statistics functions for computing means, standard deviations, kurtosis, and so forth

SAS functions are documented in *SAS Language Reference: Dictionary*. Chapter 3, “[Working with Time Series Data](#),” discusses the use of date, time, lagging, and differencing functions. Chapter 4, “[Date Intervals, Formats, and Functions](#),” contains a reference list of date and time functions.

Formats, Informats, and Time Intervals

Base SAS software provides formats to control the printing of data values, informats to read data values, and time intervals to define the frequency of time series. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information.

SAS Forecast Studio

SAS Forecast Studio is part of the SAS Forecast Server product. It provides an interactive environment for modeling and forecasting very large collections of hierarchically organized time series, such as SKUs in product lines and sales regions of a retail business. Forecast Studio greatly extends the capabilities provided by the [Time Series Forecasting System](#) included with SAS/ETS and described in *Part IV*.

Forecast Studio is documented in *SAS Forecast Server User’s Guide*.

SAS High-Performance Forecasting

SAS High-Performance Forecasting (HPF) software provides a system of SAS procedures for large-scale automatic forecasting in business, government, and academic applications. Major uses of High-Performance Forecasting procedures include: forecasting, forecast scoring, market response modeling, and time series data mining.

The software includes the following automatic forecasting process:

- accumulates the time-stamped data to form a fixed-interval time series
- diagnoses the time series using time series analysis techniques
- creates a list of candidate model specifications based on the diagnostics
- fits each candidate model specification to the time series
- generates forecasts for each candidate fitted model

- selects the most appropriate model specification based on either in-sample or holdout-sample evaluation using a model selection criterion
- refits the selected model specification to the entire range of the time series
- creates a forecast score from the selected fitted model
- generate forecasts from the forecast score
- evaluates the forecast using in-sample analysis
- provides for out-of-sample forecast performance analysis
- performs top-down, middle-out, or bottom-up reconciliations of forecasts in the hierarchy

SAS/GRAPH Software

SAS/GRAPH software includes procedures that create two- and three-dimensional high resolution color graphics plots and charts. You can generate output that graphs the relationship of data values to one another, enhance existing graphs, or simply create graphics output that is not tied to data.

With the addition of ODS Graphics features to SAS/ETS procedures, there is now less need for the use of SAS/GRAPH procedures with SAS/ETS. However, SAS/GRAPH procedures allow you to create additional graphical displays of your results.

SAS/GRAPH software can produce the following types of output:

- charts
- plots
- maps
- text
- three-dimensional graphs

With SAS/GRAPH software you can produce high-resolution color graphics plots of time series data.

SAS/STAT Software

SAS/STAT software is of interest to users of SAS/ETS software because many econometric and other statistical methods not included in SAS/ETS software are provided in SAS/STAT software.

SAS/STAT software includes procedures for a wide range of statistical methodologies including the following:

- logistic regression
- censored regression
- principal component analysis
- structural equation models using covariance structure analysis
- factor analysis
- survival analysis
- discriminant analysis
- cluster analysis
- categorical data analysis; log-linear and conditional logistic models
- general linear models
- mixed linear and nonlinear models
- generalized linear models
- response surface analysis
- kernel density estimation
- LOESS regression
- spline regression
- two-dimensional kriging
- multiple imputation for missing values
- survey data analysis

SAS/IML Software

SAS/IML software gives you access to a powerful and flexible programming language (Interactive Matrix Language) in a dynamic, interactive environment. The fundamental object of the language is a data matrix. You can use SAS/IML software interactively (at the statement level) to see results immediately, or you can store statements in a module and execute them later. The programming is dynamic because necessary activities such as memory allocation and dimensioning of matrices are done automatically.

You can access built-in operators and call routines to perform complex tasks such as matrix inversion or eigenvector generation. You can define your own functions and subroutines using SAS/IML modules. You can perform operations on an entire data matrix. You have access to a wide choice of data management commands. You can read, create, and update SAS data sets from inside SAS/IML software without ever using the DATA step.

SAS/IML software is of interest to users of SAS/ETS software because it enables you to program your own econometric and time series methods in the SAS System. It contains subroutines for time series operators and for general function optimization. If you need to perform a statistical calculation not provided as an automated feature by SAS/ETS or other SAS software, you can use SAS/IML software to program the matrix equations for the calculation.

Kalman Filtering and Time Series Analysis in SAS/IML

SAS/IML software includes CALL routines and functions for Kalman filtering and time series analysis, which perform the following:

- generate univariate, multivariate, and fractional time series
- compute likelihood function of ARMA, VARMA, and ARFIMA models
- compute an autocovariance function of ARMA, VARMA, and ARFIMA models
- check the stationarity of ARMA and VARMA models
- filter and smooth time series models using Kalman method
- fit AR, periodic AR, time-varying coefficient AR, VAR, and ARFIMA models
- handle Bayesian seasonal adjustment models

SAS/IML Stat Studio

SAS/IML Studio is a highly interactive tool for data exploration and analysis. SAS/IML Studio runs on a PC in the Microsoft Windows operating environment. You can use SAS/IML Studio to do the following:

- explore data through graphs linked across multiple windows

- transform data
- subset data
- analyze univariate distributions
- discover structure and features in multivariate data
- fit and evaluate explanatory models
- create your own customized statistical graphics
- add legends, curves, maps, or other custom features to statistical graphics
- develop interactive programs that use dialog boxes
- extend the built-in analyses by calling SAS procedures
- create custom analyses
- repeat an analysis on different data
- extend the results of SAS procedures by using IML
- share analyses with colleagues who also use SAS/IML Studio
- call functions from libraries written in R, C/C++, FORTRAN, or Java

See *SAS/IML Studio User's Guide* for more information.

SAS/OR Software

SAS/OR software provides SAS procedures for operations research and project planning and includes a menu driven system for project management. SAS/OR software has features for the following:

- solving transportation problems
- linear, integer, and mixed-integer programming
- nonlinear programming and optimization
- scheduling projects
- plotting Gantt charts
- drawing network diagrams
- solving optimal assignment problems
- network flow programming

SAS/OR software might be of interest to users of SAS/ETS software for its mathematical programming features. In particular, the NLP and OPTMODEL procedures in SAS/OR software solve nonlinear programming problems and can be used for constrained and unconstrained maximization of user-defined likelihood functions.

See *SAS/OR User's Guide: Mathematical Programming* for more information.

SAS/QC Software

SAS/QC software provides a variety of procedures for statistical quality control and quality improvement. SAS/QC software includes procedures for the following:

- Shewhart control charts
- cumulative sum control charts
- moving average control charts
- process capability analysis
- Ishikawa diagrams
- Pareto charts
- experimental design

SAS/QC software also includes the SQC menu system for interactive application of statistical quality control methods and the ADX Interface for experimental design.

MLE for User-Defined Likelihood Functions

There are several SAS procedures that enable you to do maximum likelihood estimation of parameters in an arbitrary model with a likelihood function that you define: PROC MODEL, PROC NLP, PROC OPTMODEL and PROC IML.

The MODEL procedure in SAS/ETS software enables you to minimize general log-likelihood functions for the error term of a model.

The NLP and OPTMODEL procedures in SAS/OR software are general nonlinear programming procedures that can maximize a general function subject to linear equality or inequality constraints. You can use PROC NLP or OPTMODEL to maximize a user-defined nonlinear likelihood function.

You can use the IML procedure in SAS/IML software for maximum likelihood problems. The optimization routines used by PROC NLP are available through IML subroutines. You can write the likelihood function in the SAS/IML matrix language and call the constrained and unconstrained nonlinear programming subroutines to maximize the likelihood function with respect to the parameter vector.

JMP® Software

JMP software uses a flexible graphical interface to display and analyze data. JMP dynamically links statistics and graphics so you can easily explore data, make discoveries, and gain the knowledge you need to make better decisions. JMP provides a comprehensive

set of statistical tools as well as design of experiments (DOE) and advanced quality control (QC and SPC) tools for Six Sigma in a single package. JMP is software for interactive statistical graphics and includes:

- a data table window for editing, entering, and manipulating data
- a broad range of graphical and statistical methods for data analysis
- a facility for grouping data and computing summary statistics
- JMP scripting language (JSL)—a scripting language for saving and creating frequently used routines
- JMP automation
- Formula Editor—a formula editor for each table column to compute values as needed
- linear models, correlations, and multivariate
- design of experiments module
- options to highlight and display subsets of data
- statistical quality control and variability charts—special plots, charts, and communication capability for quality-improvement techniques
- survival analysis
- time series analysis, which includes the following:
 - Box-Jenkins ARIMA forecasting
 - seasonal ARIMA forecasting
 - transfer function modeling
 - smoothing models: Winters method, single, double, linear, damped trend linear, and seasonal exponential smoothing
 - diagnostic charts (autocorrelation, partial autocorrelation, and variogram) and statistics of fit
 - a model comparison table to compare all forecasts generated
 - spectral density plots and white noise tests
- tools for printing and for moving analyses results between applications

SAS Enterprise Guide®

SAS Enterprise Guide has the following features:

- integration with the SAS9 platform:
 - open metadata repository (OMR) integration
 - SAS report integration
 - * create report interface
 - * ODS support
 - * Web report studio integration
 - access to information maps
 - ETL studio impact analysis
 - ESRI integration within the OLAP analyzer
 - data mining scoring task
- the user interface and workflow
 - process flow
 - ability to create stored processes from process flows
 - SAS folders window
 - project parameters
 - query builder interface
 - code node
 - OLAP analyzer
 - * ESRI integration
 - * tree-diagram-based OLAP explorer
 - * SAS report snapshots
 - * SAS Web OLAP viewer for .NET ability to create EG projects
 - workspace maximization

With Enterprise Guide, you can perform time series analysis with the following EG procedures:

- prepare time series data—the Prepare Time Series Data task can be used to make data more suitable for analysis by other time series tasks.
- create time series data—the Create Time Series Data wizard helps you convert transactional data into fixed-interval time series. Transactional data are time-stamped data collected over time with irregular or varied frequency.
- ARIMA Modeling and Forecasting task

- Basic Forecasting task
- Regression Analysis with Autoregressive Errors
- Regression Analysis of Panel Data

SAS® Add-In for Microsoft Office

The main time series tasks in SAS Add-in for Microsoft Office (AMO) are as follows:

- Prepare Time Series Data
- Basic Forecasting
- ARIMA Modeling and Forecasting
- Regression Analysis with Autoregressive Errors
- Regression Analysis of Panel Data
- Create Time Series Data
- Forecast Studio Create Project
- Forecast Studio Open Project
- Forecast Studio Submit Overrides

SAS Enterprise Miner™—Time Series Node

SAS Enterprise Miner™ is the SAS solution for data mining, streamlining the data mining process to create highly accurate predictive and descriptive models. Enterprise Miner's process flow diagram eliminates the need for manual coding and reduces the model development time for both business analysts and statisticians. The system is customizable and extensible; users can integrate their code and build new nodes for redistribution.

The Time Series node is a method of investigating time series data. It belongs to the Modify category of the SAS SEMMA (sample, explore, modify, model, assess) data mining process. The Time Series node enables you to understand trends and seasonal variation in large amounts of time series and transactional data.

The Time Series node in SAS Enterprise Miner enables you to do the following:

- perform time series analysis
- perform forecasting
- work with transactional data

SAS Risk Products

The SAS Risk products include SAS Risk Dimensions[®], SAS Credit Risk Management for Banking, SAS OpRisk VaR, and SAS OpRisk Monitor.

The analytical methods of SAS Risk Dimensions measure market risk and credit risk. SAS Risk Dimensions creates an environment where market and position data are staged for analysis using SAS data access and warehousing methodologies. SAS Risk Dimensions delivers a full range of modern credit, market and operational risk analysis techniques including:

- mark-to-market
- scenario analysis
- profit/loss curves and surfaces
- sensitivity analysis
- delta normal VaR
- historical simulation VaR
- Monte Carlo VaR
- current exposure
- potential exposure
- credit VaR
- optimization

SAS Credit Risk Management for Banking is a complete end-to-end application for measuring, exploring, managing, and reporting credit risk. SAS Credit Risk Management for Banking integrates data access, mapping, enrichment, and aggregation with advanced analytics and flexible reporting, all in an open, extensible, client-server framework.

SAS Credit Risk Management for Banking enables you to do the following:

- access and aggregate credit risk data across disparate operating systems and sources
- seamlessly integrate credit scoring/internal rating with credit portfolio risk assessment
- accurately measure, monitor, and report potential credit risk exposures within entities of an organization and aggregated across the entire organization, both on the counterparty level and the portfolio level
- evaluate alternative strategies for pricing, hedging, or transferring credit risk
- optimize the allocation of credit risk mitigants or assign the mitigants to lower the regulatory capital requirement

- optimize the allocation of regulatory capital and economic capital
- facilitate regulatory compliance and risk disclosure requirements for a wide variety of regulations such as Basel I, Basel II, and the Capital Requirements Directive (CAD III)

References

- Amal, S. and Weselowski, R. (1993), "Practical Econometric Analysis for Assessment of Real Property: Using the SAS System on Personal Computers," *Proceedings of the Eighteenth Annual SAS Users Group International Conference*, 385-390. Cary, NC: SAS Institute Inc.
- Benseman, B. (1990), "Better Forecasting with SAS/ETS Software," *Proceedings of the Fifteenth Annual SAS Users Group International Conference*, 494-497. Cary, NC: SAS Institute Inc.
- Calise, A. and Earley, J. (1997), "Forecasting College Enrollment Using the SAS System," *Proceedings of the Twenty-Second Annual SAS Users Group International Conference*, 1326-1329. Cary, NC: SAS Institute Inc.
- Early, J., Sweeney, J., and Zekavat, S. M. (1989), "PROC ARIMA and the Dow Jones Stock Index," *Proceedings of the Fourteenth Annual SAS Users Group International Conference*, 371-375. Cary, NC: SAS Institute Inc.
- Fischetti, T., Heathcote, S. and Perry, D. (1993), "Using SAS to Create a Modular Forecasting System," *Proceedings of the Eighteenth Annual SAS Users Group International Conference*, 580-585. Cary, NC: SAS Institute Inc.
- Fleming, N. S., Gibson, E. and Fleming, D. G. (1996), "The Use of PROC ARIMA to Test an Intervention Effect," *Proceedings of the Twenty-First Annual SAS Users Group International Conference*, 1317-1326. Cary, NC: SAS Institute Inc.
- Hisnanick, J. J. (1991), "Evaluating Input Separability in a Model of the U.S. Manufacturing Sector," *Proceedings of the Sixteenth Annual SAS Users Group International Conference*, 688-693. Cary, NC: SAS Institute Inc.
- Hisnanick, J. J. (1992), "Using PROC ARIMA in Forecasting the Demand and Utilization of Inpatient Hospital Services," *Proceedings of the Seventeenth Annual SAS Users Group International Conference*, 383-391. Cary, NC: SAS Institute Inc.
- Hisnanick, J. J. (1993), "Using SAS/ETS in Applied Econometrics: Parameters Estimates for the CES-Translog Specification," *Proceedings of the Eighteenth Annual SAS Users Group International Conference*, 275-279. Cary, NC: SAS Institute Inc.
- Hoyer, K. K. and Gross, K. C. (1993), "Spectral Decomposition and Reconstruction of Nuclear Plant Signals," *Proceedings of the Eighteenth Annual SAS Users Group International Conference*, 1153-1158. Cary, NC: SAS Institute Inc.
- Keshani, D. A. and Taylor, T. N. (1992), "Weather Sensitive Appliance Load Curves; Conditional Demand Estimation," *Proceedings of the Annual SAS Users Group International Conference*, 422-430. Cary, NC:

SAS Institute Inc.

Khan, M. H. (1990), "Transfer Function Model for Gloss Prediction of Coated Aluminum Using the ARIMA Procedure," *Proceedings of the Fifteenth Annual SAS Users Group International Conference*, 517-522. Cary, NC: SAS Institute Inc.

Le Bouton, K. J. (1989), "Performance Function for Aircraft Production Using PROC SYSLIN and L^2 Norm Estimation," *Proceedings of the Fourteenth Annual SAS Users Group International Conference*, 424-426. Cary, NC: SAS Institute Inc.

Lin, L. and Myers, S. C. (1988), "Forecasting the Economy using the Composite Leading Index, Its Components, and a Rational Expectations Alternative," *Proceedings of the Thirteenth Annual SAS Users Group International Conference*, 181-186. Cary, NC: SAS Institute Inc.

McCarty, L. (1994), "Forecasting Operational Indices Using SAS/ETS Software," *Proceedings of the Nineteenth Annual SAS Users Group International Conference*, 844-848. Cary, NC: SAS Institute Inc.

Morelock, M. M., Pargellis, C. A., Graham, E. T., Lamarre, D., and Jung, G. (1995), "Time-Resolved Ligand Exchange Reactions: Kinetic Models for Competitive Inhibitors with Recombinant Human Renin," *Journal of Medical Chemistry*, 38, 1751-1761.

Parresol, B. R. and Thomas, C. E. (1991), "Econometric Modeling of Sweetgum Stem Biomass Using the IML and SYSLIN Procedures," *Proceedings of the Sixteenth Annual SAS Users Group International Conference*, 694-699. Cary, NC: SAS Institute Inc.

Chapter 3

Working with Time Series Data

Contents

Overview	62
Time Series and SAS Data Sets	63
Introduction	63
Reading a Simple Time Series	64
Dating Observations	65
SAS Date, Datetime, and Time Values	66
Reading Date and Datetime Values with InformatS	67
Formatting Date and Datetime Values	68
The Variables DATE and DATETIME	69
Sorting by Time	70
Subsetting Data and Selecting Observations	71
Subsetting SAS Data Sets	71
Using the WHERE Statement with SAS Procedures	72
Using SAS Data Set Options	73
Storing Time Series in a SAS Data Set	73
Standard Form of a Time Series Data Set	74
Several Series with Different Ranges	75
Missing Values and Omitted Observations	76
Cross-Sectional Dimensions and BY Groups	77
Interleaved Time Series	78
Output Data Sets of SAS/ETS Procedures	80
Time Series Periodicity and Time Intervals	81
Specifying Time Intervals	82
Using Intervals with SAS/ETS Procedures	83
Time Intervals, the Time Series Forecasting System, and the Time Series Viewer	83
Plotting Time Series	83
Using the Time Series Viewer	84
Using PROC SGPLOT	84
Using PROC PLOT	90
Using PROC TIMEPLOT	91
Using PROC GPLOT	92
Calendar and Time Functions	93
Computing Dates from Calendar Variables	94
Computing Calendar Variables from Dates	94

Converting between Date, Datetime, and Time Values	95
Computing Datetime Values	95
Computing Calendar and Time Variables	96
Interval Functions INTNX and INTCK	96
Incrementing Dates by Intervals	97
Alignment of SAS Dates	98
Computing the Width of a Time Interval	99
Computing the Ceiling of an Interval	100
Counting Time Intervals	100
Checking Data Periodicity	101
Filling In Omitted Observations in a Time Series Data Set	101
Using Interval Functions for Calendar Calculations	102
Lags, Leads, Differences, and Summations	103
The LAG and DIF Functions	103
Multiperiod Lags and Higher-Order Differencing	107
Percent Change Calculations	107
Leading Series	110
Summing Series	111
Transforming Time Series	112
Log Transformation	113
Other Transformations	114
The EXPAND Procedure and Data Transformations	115
Manipulating Time Series Data Sets	115
Splitting and Merging Data Sets	115
Transposing Data Sets	116
Time Series Interpolation	120
Interpolating Missing Values	121
Interpolating to a Higher or Lower Frequency	121
Interpolating between Stocks and Flows, Levels and Rates	121
Reading Time Series Data	122
Reading a Simple List of Values	122
Reading Fully Described Time Series in Transposed Form	123

Overview

This chapter discusses working with time series data in the SAS System. The following topics are included:

- dating time series and working with SAS date and datetime values
- subsetting data and selecting observations

- storing time series data in SAS data sets
- specifying time series periodicity and time intervals
- plotting time series
- using calendar and time interval functions
- computing lags and other functions across time
- transforming time series
- transposing time series data sets
- interpolating time series
- reading time series data recorded in different ways

In general, this chapter focuses on using features of the SAS programming language and not on features of SAS/ETS software. However, since SAS/ETS procedures are used to analyze time series, understanding how to use the SAS programming language to work with time series data is important for the effective use of SAS/ETS software.

You do not need to read this chapter to use SAS/ETS procedures. If you are already familiar with SAS programming you might want to skip this chapter, or you can refer to sections of this chapter for help on specific time series data processing questions.

Time Series and SAS Data Sets

Introduction

To analyze data with the SAS System, data values must be stored in a SAS data set. A SAS data set is a matrix (or table) of data values organized into variables and observations.

The *variables* in a SAS data set label the columns of the data matrix, and the *observations* in a SAS data set are the rows of the data matrix. You can also think of a SAS data set as a kind of file, with the observations representing records in the file and the variables representing fields in the records. (See *SAS Language Reference: Concepts* for more information about SAS data sets.)

Usually, each observation represents the measurement of one or more variables for the individual subject or item observed. Often, the values of some of the variables in the data set are used to identify the individual subjects or items that the observations measure. These identifying variables are referred to as *ID variables*.

For many kinds of statistical analysis, only relationships among the variables are of interest, and the identity of the observations does not matter. ID variables might not be relevant in such a case.

However, for time series data the identity and order of the observations are crucial. A time series is a set of observations made at a succession of equally spaced points in time.

For example, if the data are monthly sales of a company's product, the variable measured is sales of the product and the unit observed is the operation of the company during each month. These observations can be identified by year and month. If the data are quarterly gross national product, the variable measured is final goods production and the unit observed is the economy during each quarter. These observations can be identified by year and quarter.

For time series data, the observations are identified and related to each other by their position in time. Since SAS does not assume any particular structure to the observations in a SAS data set, there are some special considerations needed when storing time series in a SAS data set.

The main considerations are how to associate dates with the observations and how to structure the data set so that SAS/ETS procedures and other SAS procedures recognize the observations of the data set as constituting time series. These issues are discussed in following sections.

Reading a Simple Time Series

Time series data can be recorded in many different ways. The section “[Reading Time Series Data](#)” on page 122 discusses some of the possibilities. The example below shows a simple case.

The following SAS statements read monthly values of the U.S. Consumer Price Index for June 1990 through July 1991. The data set USCPI is shown in [Figure 3.1](#).

```
data uscpi;
    input year month cpi;
datalines;
1990  6 129.9
1990  7 130.4

    ... more lines ...

proc print data=uscpi;
run;
```

Figure 3.1 Time Series Data

Obs	year	month	cpi
1	1990	6	129.9
2	1990	7	130.4
3	1990	8	131.6
4	1990	9	132.7
5	1990	10	133.5
6	1990	11	133.8
7	1990	12	133.8
8	1991	1	134.6
9	1991	2	134.8
10	1991	3	135.0
11	1991	4	135.2
12	1991	5	135.6
13	1991	6	136.0
14	1991	7	136.2

When a time series is stored in the manner shown by this example, the terms *series* and *variable* can be used interchangeably. There is one observation per row and one series/variable per column.

Dating Observations

The SAS System supports special date, datetime, and time values, which make it easy to represent dates, perform calendar calculations, and identify the time period of observations in a data set.

The preceding example uses the ID variables YEAR and MONTH to identify the time periods of the observations. For a quarterly data set, you might use YEAR and QTR as ID variables. A daily data set might have the ID variables YEAR, MONTH, and DAY. Clearly, it would be more convenient to have a single ID variable that could be used to identify the time period of observations, regardless of their frequency.

The following section, “[SAS Date, Datetime, and Time Values](#)” on page 66, discusses how the SAS System represents dates and times internally and how to specify date, datetime, and time values in a SAS program. The section “[Reading Date and Datetime Values with Informats](#)” on page 67 discusses how to read in date and time values from data records and how to control the display of date and datetime values in SAS output. Later sections discuss other issues concerning date and datetime values, specifying time intervals, data periodicity, and calendar calculations.

SAS date and datetime values and the other features discussed in the following sections are also described in *SAS Language Reference: Dictionary*. Reference documentation on these features is also provided in Chapter 4, “[Date Intervals, Formats, and Functions](#).”

SAS Date, Datetime, and Time Values

SAS Date Values

SAS software represents dates as the number of days since a reference date. The reference date, or date zero, used for SAS date values is 1 January 1960. For example, 3 February 1960 is represented by SAS as 33. The SAS date for 17 October 1991 is 11612.

SAS software correctly represents dates from the year 1582 to the year 20,000.

Dates represented in this way are called SAS *date values*. Any numeric variable in a SAS data set whose values represent dates in this way is called a *SAS date variable*.

Representing dates as the number of days from a reference date makes it easy for the computer to store them and perform calendar calculations, but these numbers are not meaningful to users. However, you never have to use SAS date values directly, since SAS automatically converts between this internal representation and ordinary ways of expressing dates, provided that you indicate the format with which you want the date values to be displayed. (Formatting of date values is explained in the section “[Formatting Date and Datetime Values](#)” on page 68.)

Century of Dates Represented with Two-Digit Year Values

SAS software informats, functions, and formats can process dates that are represented with two-digit year values. The century assumed for a two-digit year value can be controlled with the YEARCUTOFF= option in the OPTIONS statement. The YEARCUTOFF= system option controls how dates with two-digit year values are interpreted by specifying the first year of a 100-year span. The default value for the YEARCUTOFF= option is 1920. Thus by default the year ‘17’ is interpreted as 2017, while the year ‘25’ is interpreted as 1925. (See *SAS Language Reference: Dictionary* for more information about YEARCUTOFF=.)

SAS Date Constants

SAS date values are written in a SAS program by placing the dates in single quotes followed by a D. The date is represented by the day of the month, the three letter abbreviation of the month name, and the year.

For example, SAS reads the value ‘17OCT1991’D the same as 11612, the SAS date value for 17 October 1991. Thus, the following SAS statements print DATE=11612:

```
data _null_;  
  date = '17oct1991'd;  
  put date=;  
run;
```

The year value can be given with two or four digits, so ‘17OCT91’D is the same as ‘17OCT1991’D.

SAS Datetime Values and Datetime Constants

To represent both the time of day and the date, SAS uses *datetime values*. SAS datetime values represent the date and time as the number of seconds the time is from a reference time. The reference time, or time zero, used for SAS datetime values is midnight, 1 January 1960. Thus, for example, the SAS datetime value for 17 October 1991 at 2:45 in the afternoon is 1003329900.

To specify datetime constants in a SAS program, write the date and time in single quotes followed by DT. To write the date and time in a SAS datetime constant, write the date part using the same syntax as for date constants, and follow the date part with the hours, the minutes, and the seconds, separating the parts with colons. The seconds are optional.

For example, in a SAS program you would write 17 October 1991 at 2:45 in the afternoon as '17OCT91:14:45'DT. SAS reads this as 1003329900. Table 3.1 shows some other examples of datetime constants.

Table 3.1 Examples of Datetime Constants

Datetime Constant	Time
'17OCT1991:14:45:32'DT	32 seconds past 2:45 p.m., 17 October 1991
'17OCT1991:12:5'DT	12:05 p.m., 17 October 1991
'17OCT1991:2:0'DT	2:00 a.m., 17 October 1991
'17OCT1991:0:0'DT	midnight, 17 October 1991

SAS Time Values

The SAS System also supports *time values*. SAS time values are just like datetime values, except that the date part is not given. To write a time value in a SAS program, write the time the same as for a datetime constant, but use T instead of DT. For example, 2:45:32 p.m. is written '14:45:32'T. Time values are represented by a number of seconds since midnight, so SAS reads '14:45:32'T as 53132.

SAS time values are not very useful for identifying time series, since usually both the date and the time of day are needed. Time values are not discussed further in this book.

Reading Date and Datetime Values with Informats

SAS provides a selection of *informats* for reading SAS date and datetime values from date and time values recorded in ordinary notations.

A SAS informat is an instruction that converts the values from a character-string representation into the internal numerical value of a SAS variable. Date informats convert dates from ordinary notations used to enter them to SAS date values; datetime informats convert date and time from ordinary notation to SAS datetime values.

For example, the following SAS statements read monthly values of the U.S. Consumer Price Index. Since the data are monthly, you could identify the date with the variables YEAR and MONTH, as in the previous

example. Instead, in this example the time periods are coded as a three-letter month abbreviation followed by the year. The informat MONYY. is used to read month-year dates coded this way and to express them as SAS date values for the first day of the month, as follows:

```
data uscpi;
  input date : monyy7. cpi;
  format date monyy7.;
  label cpi = "US Consumer Price Index";
datalines;
jun1990 129.9
jul1990 130.4

... more lines ...
```

The SAS System provides informats for most common notations for dates and times. See [Chapter 4](#) for more information about the date and datetime informats available.

Formatting Date and Datetime Values

SAS provides *formats* to convert the internal representation of date and datetime values used by SAS to ordinary notations for dates and times. Several different formats are available for displaying dates and datetime values in most of the commonly used notations.

A SAS format is an instruction that converts the internal numerical value of a SAS variable to a character string that can be printed or displayed. Date formats convert SAS date values to a readable form; datetime formats convert SAS datetime values to a readable form.

In the preceding example, the variable DATE was set to the SAS date value for the first day of the month for each observation. If the data set USCPI were printed or otherwise displayed, the values shown for DATE would be the number of days since 1 January 1960. (See the “DATE with no format” column in [Figure 3.2](#).) To display date values appropriately, use the FORMAT statement.

The following example processes the data set USCPI to make several copies of the variable DATE and uses a FORMAT statement to give different formats to these copies. The format cases shown are the MONYY7. format (for the DATE variable), the DATE9. format (for the DATE1 variable), and no format (for the DATE0 variable). The PROC PRINT output in [Figure 3.2](#) shows the effect of the different formats on how the date values are printed.

```
data fmttest;
  set uscpi;
  date0 = date;
  date1 = date;
  label date = "DATE with MONYY7. format"
        date1 = "DATE with DATE9. format"
        date0 = "DATE with no format";
  format date monyy7. date1 date9.;
run;

proc print data=fmttest label;
run;
```

Figure 3.2 SAS Date Values Printed with Different Formats

Obs	DATE with MONYY7. format	US Consumer Price Index	DATE with no format	DATE with DATE9. format
1	JUN1990	129.9	11109	01JUN1990
2	JUL1990	130.4	11139	01JUL1990
3	AUG1990	131.6	11170	01AUG1990
4	SEP1990	132.7	11201	01SEP1990
5	OCT1990	133.5	11231	01OCT1990
6	NOV1990	133.8	11262	01NOV1990
7	DEC1990	133.8	11292	01DEC1990
8	JAN1991	134.6	11323	01JAN1991
9	FEB1991	134.8	11354	01FEB1991
10	MAR1991	135.0	11382	01MAR1991
11	APR1991	135.2	11413	01APR1991
12	MAY1991	135.6	11443	01MAY1991
13	JUN1991	136.0	11474	01JUN1991
14	JUL1991	136.2	11504	01JUL1991

The appropriate format to use for SAS date or datetime valued ID variables depends on the sampling frequency or periodicity of the time series. [Table 3.2](#) shows recommended formats for common data sampling frequencies and shows how the date '17OCT1991'D or the datetime value '17OCT1991:14:45:32'DT is displayed by these formats.

Table 3.2 Formats for Different Sampling Frequencies

ID values	Periodicity	FORMAT	Example
SAS date	annual	YEAR4.	1991
	quarterly	YYQC6.	1991:4
	monthly	MONYY7.	OCT1991
	weekly	WEEKDATX23.	Thursday, 17 Oct 1991
	daily	DATE9.	17OCT1991
SAS datetime	hourly	DATETIME10.	17OCT91:14
	minutes	DATETIME13.	17OCT91:14:45
	seconds	DATETIME16.	17OCT91:14:45:32

See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about the date and datetime formats available.

The Variables DATE and DATETIME

SAS/ETS procedures enable you to identify time series observations in many different ways to suit your needs. As discussed in preceding sections, you can use a combination of several ID variables, such as YEAR and MONTH for monthly data.

However, using a single SAS date or datetime ID variable is more convenient and enables you to take advantage of some features SAS/ETS procedures provide for processing ID variables. One such feature is automatic extrapolation of the ID variable to identify forecast observations. These features are discussed in following sections.

Thus, it is a good practice to include a SAS date or datetime ID variable in all the time series SAS data sets you create. It is also a good practice to always give the date or datetime ID variable a format appropriate for the data periodicity. (For information about creating SAS date and datetime values from multiple ID variables, see the section “[Computing Dates from Calendar Variables](#)” on page 94.)

You can assign a SAS date- or datetime-valued ID variable any name that conforms to SAS variable name requirements. However, you might find working with time series data in SAS easier and less confusing if you adopt the practice of always using the same name for the SAS date or datetime ID variable.

This book always names the date- or datetime-values ID variable `DATE` if it contains SAS date values or `DATETIME` if it contains SAS datetime values. This makes it easy to recognize the ID variable and also makes it easy to recognize whether this ID variable uses SAS date or datetime values.

Sorting by Time

Many SAS/ETS procedures assume the data are in chronological order. If the data are not in time order, you can use the `SORT` procedure to sort the data set. For example,

```
proc sort data=a;  
    by date;  
run;
```

There are many ways of coding the time ID variable or variables, and some ways do not sort correctly. If you use SAS date or datetime ID values as suggested in the preceding section, you do not need to be concerned with this issue. But if you encode date values in nonstandard ways, you need to consider whether your ID variables will sort.

SAS date and datetime values always sort correctly, as do combinations of numeric variables such as `YEAR`, `MONTH`, and `DAY` used together. Julian dates also sort correctly. (Julian dates are numbers of the form `yyddd`, where `yy` is the year and `ddd` is the day of the year. For example, 17 October 1991 has the Julian date value 91290.)

Calendar dates such as numeric values coded as `mmddyy` or `ddmmyy` do not sort correctly. Character variables that contain display values of dates, such as dates in the notation produced by SAS date formats, generally do not sort correctly.

Subsetting Data and Selecting Observations

It is often necessary to subset data for analysis. You might need to subset data to do the following:

- restrict the time range. For example, you want to perform a time series analysis using only recent data and ignoring observations from the distant past.
- select cross sections of the data. (See the section “[Cross-Sectional Dimensions and BY Groups](#)” on page 77.) For example, you have a data set with observations over time for each of several states, and you want to analyze the data for a single state.
- select particular kinds of time series from an interleaved-form data set. (See the section “[Interleaved Time Series](#)” on page 78.) For example, you have an output data set produced by the FORECAST procedure that contains both forecast and confidence limits observations, and you want to extract only the forecast observations.
- exclude particular observations. For example, you have an outlier in your time series, and you want to exclude this observation from the analysis.

You can subset data either by using the DATA step to create a subset data set or by using a WHERE statement with the SAS procedure that analyzes the data.

A typical WHERE statement used in a procedure has the following form:

```
proc arima data=full;
  where '31dec1993'd < date < '26mar1994'd;
  identify var=close;
run;
```

For complete reference documentation on the WHERE statement, see *SAS Language Reference: Dictionary*.

Subsetting SAS Data Sets

To create a subset data set, specify the name of the subset data set in the DATA statement, bring in the full data set with a SET statement, and specify the subsetting criteria with either subsetting IF statements or WHERE statements.

For example, suppose you have a data set that contains time series observations for each of several states. The following DATA step uses a WHERE statement to exclude observations with dates before 1970 and uses a subsetting IF statement to select observations for the state NC:

```
data subset;
  set full;
  where date >= '1jan1970'd;
  if state = 'NC';
run;
```

In this case, it makes no difference logically whether the WHERE statement or the IF statement is used, and you can combine several conditions in one subsetting statement. The following statements produce the same results as the previous example:

```
data subset;
  set full;
  if date >= '1jan1970'd & state = 'NC';
run;
```

The WHERE statement acts on the input data sets specified in the SET statement before observations are processed by the DATA step program, whereas the IF statement is executed as part of the DATA step program. If the input data set is indexed, using the WHERE statement can be more efficient than using the IF statement. However, the WHERE statement can refer only to variables in the input data set, not to variables computed by the DATA step program.

To subset the variables of a data set, use KEEP or DROP statements or use KEEP= or DROP= data set options. See *SAS Language Reference: Dictionary* for information about KEEP and DROP statements and SAS data set options.

For example, suppose you want to subset the data set as in the preceding example, but you want to include in the subset data set only the variables DATE, X, and Y. You could use the following statements:

```
data subset;
  set full;
  if date >= '1jan1970'd & state = 'NC';
  keep date x y;
run;
```

Using the WHERE Statement with SAS Procedures

Use the WHERE statement with SAS procedures to process only a subset of the input data set. For example, suppose you have a data set that contains monthly observations for each of several states, and you want to use the AUTOREG procedure to analyze data since 1970 for the state NC. You could use the following statements:

```
proc autoreg data=full;
  where date >= '1jan1970'd & state = 'NC';
  ... additional statements ...
run;
```

You can specify any number of conditions in the WHERE statement. For example, suppose that a strike created an outlier in May 1975, and you want to exclude that observation. You could use the following statements:

```
proc autoreg data=full;
  where date >= '1jan1970'd & state = 'NC'
    & date ^= '1may1975'd;
```

```
... additional statements ...
run;
```

Using SAS Data Set Options

You can use the OBS= and FIRSTOBS= data set options to subset the input data set.

For example, the following statements print observations 20 through 25 of the data set FULL:

```
proc print data=full(firstobs=20 obs=25);
run;
```

Figure 3.3 Partial Listing of Data Set FULL

Obs	date	state	i	x	y	close
20	21OCT1993	NC	20	0.44803	0.35302	0.44803
21	22OCT1993	NC	21	0.03186	1.67414	0.03186
22	23OCT1993	NC	22	-0.25232	-1.61289	-0.25232
23	24OCT1993	NC	23	0.42524	0.73112	0.42524
24	25OCT1993	NC	24	0.05494	-0.88664	0.05494
25	26OCT1993	NC	25	-0.29096	-1.17275	-0.29096

You can use KEEP= and DROP= data set options to exclude variables from the input data set. See *SAS Language Reference: Dictionary* for information about SAS data set options.

Storing Time Series in a SAS Data Set

This section discusses aspects of storing time series in SAS data sets. The topics discussed are the standard form of a time series data set, storing several series with different time ranges in the same data set, omitted observations, cross-sectional dimensions and BY groups, and interleaved time series.

Any number of time series can be stored in a SAS data set. Normally, each time series is stored in a separate variable. For example, the following statements augment the USCPI data set read in the previous example with values for the producer price index:

```
data usprice;
  input date : monyy7. cpi ppi;
  format date monyy7.;
  label cpi = "Consumer Price Index"
        ppi = "Producer Price Index";
datalines;
jun1990 129.9 114.3
jul1990 130.4 114.5

... more lines ...
```

```
proc print data=usprice;
run;
```

Figure 3.4 Time Series Data Set Containing Two Series

Obs	date	cpi	ppi
1	JUN1990	129.9	114.3
2	JUL1990	130.4	114.5
3	AUG1990	131.6	116.5
4	SEP1990	132.7	118.4
5	OCT1990	133.5	120.8
6	NOV1990	133.8	120.1
7	DEC1990	133.8	118.7
8	JAN1991	134.6	119.0
9	FEB1991	134.8	117.2
10	MAR1991	135.0	116.2
11	APR1991	135.2	116.0
12	MAY1991	135.6	116.5
13	JUN1991	136.0	116.3
14	JUL1991	136.2	116.0

Standard Form of a Time Series Data Set

The simple way the CPI and PPI time series are stored in the USPRICE data set in the preceding example is termed the *standard form* of a time series data set. A time series data set in standard form has the following characteristics:

- The data set contains one variable for each time series.
- The data set contains exactly one observation for each time period.
- The data set contains an ID variable or variables that identify the time period of each observation.
- The data set is sorted by the ID variables associated with date time values, so the observations are in time sequence.
- The data are equally spaced in time. That is, successive observations are a fixed time interval apart, so the data set can be described by a single sampling interval such as hourly, daily, monthly, quarterly, yearly, and so forth. This means that time series with different sampling frequencies are not mixed in the same SAS data set.

Most SAS/ETS procedures that process time series expect the input data set to contain time series in this standard form, and this is the simplest way to store time series in SAS data sets. (The [EXPAND](#) and [TIMESERIES](#) procedures can be helpful in converting your data to this standard form.) There are more complex ways to represent time series in SAS data sets.

You can incorporate cross-sectional dimensions with BY groups, so that each BY group is like a standard form time series data set. This method is discussed in the section “[Cross-Sectional Dimensions and BY Groups](#)” on page 77.

You can interleave time series, with several observations for each time period identified by another ID variable. Interleaved time series data sets are used to store several series in the same SAS variable. Interleaved time series data sets are often used to store series of actual values, predicted values, and residuals, or series of forecast values and confidence limits for the forecasts. This is discussed in the section “[Interleaved Time Series](#)” on page 78.

Several Series with Different Ranges

Different time series can have values recorded over different time ranges. Since a SAS data set must have the same observations for all variables, when time series with different ranges are stored in the same data set, missing values must be used for the periods in which a series is not available.

Suppose that in the previous example you did not record values for CPI before August 1990 and did not record values for PPI after June 1991. The USPRICE data set could be read with the following statements:

```
data usprice;
    input date : monyy7. cpi ppi;
    format date monyy7.;
datalines;
jun1990      . 114.3
jul1990      . 114.5
aug1990 131.6 116.5
sep1990 132.7 118.4
oct1990 133.5 120.8
nov1990 133.8 120.1
dec1990 133.8 118.7
jan1991 134.6 119.0
feb1991 134.8 117.2
mar1991 135.0 116.2
apr1991 135.2 116.0
may1991 135.6 116.5
jun1991 136.0 116.3
jul1991 136.2      .
;
```

The decimal points with no digits in the data records represent missing data and are read by SAS as missing value codes.

In this example, the time range of the USPRICE data set is June 1990 through July 1991, but the time range of the CPI variable is August 1990 through July 1991, and the time range of the PPI variable is June 1990 through June 1991.

SAS/ETS procedures ignore missing values at the beginning or end of a series. That is, the series is considered to begin with the first nonmissing value and end with the last nonmissing value.

Missing Values and Omitted Observations

Missing data can also occur within a series. Missing values that appear after the beginning of a time series and before the end of the time series are called *embedded missing values*.

Suppose that in the preceding example you did not record values for CPI for November 1990 and did not record values for PPI for both November 1990 and March 1991. The USPRICE data set could be read with the following statements:

```
data usprice;
    input date : monyy. cpi ppi;
    format date monyy.;
datalines;
jun1990      . 114.3
jul1990      . 114.5
aug1990 131.6 116.5
sep1990 132.7 118.4
oct1990 133.5 120.8
nov1990      .      .
dec1990 133.8 118.7
jan1991 134.6 119.0
feb1991 134.8 117.2
mar1991 135.0      .
apr1991 135.2 116.0
may1991 135.6 116.5
jun1991 136.0 116.3
jul1991 136.2      .
;
```

In this example, the series CPI has one embedded missing value, and the series PPI has two embedded missing values. The ranges of the two series are the same as before.

Note that the observation for November 1990 has missing values for both CPI and PPI; there is no data for this period. This is an example of a *missing observation*.

You might ask why the data record for this period is included in the example at all, since the data record contains no data. However, deleting the data record for November 1990 from the example would cause an *omitted observation* in the USPRICE data set. SAS/ETS procedures expect input data sets to contain observations for a contiguous time sequence. If you omit observations from a time series data set and then try to analyze the data set with SAS/ETS procedures, the omitted observations will cause errors. When all data are missing for a period, a missing observation should be included in the data set to preserve the time sequence of the series.

If observations are omitted from the data set, the [EXPAND](#) procedure can be used to fill in the gaps with missing values (or to interpolate nonmissing values) for the time series variables and with the appropriate date or datetime values for the ID variable.

Cross-Sectional Dimensions and BY Groups

Often, time series in a collection are related by a cross sectional dimension. For example, the national average U.S. consumer price index data shown in the previous example can be disaggregated to show price indexes for major cities. In this case, there are several related time series: CPI for New York, CPI for Chicago, CPI for Los Angeles, and so forth. When these time series are considered as one data set, the city whose price level is measured is a cross sectional dimension of the data.

There are two basic ways to store such related time series in a SAS data set. The first way is to use a standard form time series data set with a different variable for each series.

For example, the following statements read CPI series for three major U.S. cities:

```
data citycpi;
    input date : monyy7. cpiny cpichi cpila;
    format date monyy7.;
datalines;
nov1989 133.200 126.700 130.000
dec1989 133.300 126.500 130.600

... more lines ...
```

The second way is to store the data in a time series cross-sectional form. In this form, the series for all cross sections are stored in one variable and a cross section ID variable is used to identify observations for the different series. The observations are sorted by the cross section ID variable and by time within each cross section.

The following statements indicate how to read the CPI series for U.S. cities in time series cross-sectional form:

```
data cpicity;
    length city $11;
    input city $11. date : monyy. cpi;
    format date monyy.;
datalines;
New York      JAN1990    135.100
New York      FEB1990    135.300

... more lines ...

proc sort data=cpicity;
    by city date;
run;
```

When processing a time series cross sectional form data set with most SAS/ETS procedures, use the cross section ID variable in a BY statement to process the time series separately. The data set must be sorted by the cross section ID variable and sorted by date within each cross section. The PROC SORT step in the preceding example ensures that the CPICITY data set is correctly sorted.

When the cross section ID variable is used in a BY statement, each BY group in the data set is like a standard form time series data set. Thus, SAS/ETS procedures that expect a standard form time series data set can process time series cross sectional data sets when a BY statement is used, producing an independent analysis for each cross section.

It is also possible to analyze time series cross-sectional data jointly. The **PANEL** procedure (and the older **TSCSREG** procedure) expects the input data to be in the time series cross-sectional form described here. See Chapter 20, “The **PANEL** Procedure,” for more information.

Interleaved Time Series

Normally, a time series data set has only one observation for each time period, or one observation for each time period within a cross section for a time series cross-sectional-form data set. However, it is sometimes useful to store several related time series in the same variable when the different series do not correspond to levels of a cross-sectional dimension of the data.

In this case, the different time series can be interleaved. An interleaved time series data set is similar to a time series cross-sectional data set, except that the observations are sorted differently and the ID variable that distinguishes the different time series does not represent a cross-sectional dimension.

Some SAS/ETS procedures produce interleaved output data sets. The interleaved time series form is a convenient way to store procedure output when the results consist of several different kinds of series for each of several input series. (Interleaved time series are also easy to process with plotting procedures. See the section “**Plotting Time Series**” on page 83.)

For example, the **FORECAST** procedure fits a model to each input time series and computes predicted values and residuals from the model. The **FORECAST** procedure then uses the model to compute forecast values beyond the range of the input data and also to compute upper and lower confidence limits for the forecast values.

Thus, the output from PROC **FORECAST** consists of up to five related time series for each variable forecast. The five resulting time series for each input series are stored in a single output variable with the same name as the series that is being forecast. The observations for the five resulting series are identified by values of the variable **_TYPE_**. These observations are interleaved in the output data set with observations for the same date grouped together.

The following statements show how to use PROC **FORECAST** to forecast the variable **CPI** in the **USCPI** data set. **Figure 3.5** shows part of the output data set produced by PROC **FORECAST** and illustrates the interleaved structure of this data set.

```
proc forecast data=uscpi interval=month lead=12
              out=foreout outfull outresid;
    var cpi;
    id date;
run;
proc print data=foreout (obs=6);
run;
```


Figure 3.5 Partial Listing of Output Data Set Produced by PROC FORECAST

Obs	date	_TYPE_	_LEAD_	cpi
1	JUN1990	ACTUAL	0	129.900
2	JUN1990	FORECAST	0	130.817
3	JUN1990	RESIDUAL	0	-0.917
4	JUL1990	ACTUAL	0	130.400
5	JUL1990	FORECAST	0	130.678
6	JUL1990	RESIDUAL	0	-0.278

Observations with `_TYPE_=ACTUAL` contain the values of CPI read from the input data set. Observations with `_TYPE_=FORECAST` contain one-step-ahead predicted values for observations with dates in the range of the input series and contain forecast values for observations for dates beyond the range of the input series. Observations with `_TYPE_=RESIDUAL` contain the difference between the actual and one-step-ahead predicted values. Observations with `_TYPE_=U95` and `_TYPE_=L95` contain the upper and lower bounds, respectively, of the 95% confidence interval for the forecasts.

Using Interleaved Data Sets as Input to SAS/ETS Procedures

Interleaved time series data sets are not directly accepted as input by SAS/ETS procedures. However, it is easy to use a `WHERE` statement with any procedure to subset the input data and select one of the interleaved time series as the input.

For example, to analyze the residual series contained in the PROC FORECAST output data set with another SAS/ETS procedure, include a `WHERE _TYPE_='RESIDUAL'` statement. The following statements perform a spectral analysis of the residuals produced by PROC FORECAST in the preceding example:

```
proc spectra data=foreout out=spectout;
  var cpi;
  where _type_='RESIDUAL';
run;
```

Combined Cross Sections and Interleaved Time Series Data Sets

Interleaved time series output data sets produced from BY-group processing of time series cross-sectional input data sets have a complex structure that combines a cross-sectional dimension, a time dimension, and the values of the `_TYPE_` variable. For example, consider the PROC FORECAST output data set produced by the following statements:

```
title "FORECAST Output Data Set with BY Groups";

proc forecast data=cpicity interval=month
  method=expo lead=2
  out=foreout outfull outresid;
  var cpi;
  id date;
  by city;
```

```
run;
proc print data=foreout (obs=6);
run;
```

The output data set FOREOUT contains many different time series in the single variable CPI. (The first few observations of FOREOUT are shown in [Figure 3.6](#).) BY groups that are identified by the variable CITY contain the result series for the different cities. Within each value of CITY, the actual, forecast, residual, and confidence limits series are stored in interleaved form, with the observations for the different series identified by the values of _TYPE_.

Figure 3.6 Combined Cross Sections and Interleaved Time Series Data

FORECAST Output Data Set with BY Groups					
Obs	city	date	_TYPE_	_LEAD_	cpi
1	Chicago	JAN90	ACTUAL	0	128.100
2	Chicago	JAN90	FORECAST	0	128.252
3	Chicago	JAN90	RESIDUAL	0	-0.152
4	Chicago	FEB90	ACTUAL	0	129.200
5	Chicago	FEB90	FORECAST	0	128.896
6	Chicago	FEB90	RESIDUAL	0	0.304

Output Data Sets of SAS/ETS Procedures

Some SAS/ETS procedures (such as PROC FORECAST) produce interleaved output data sets, and other SAS/ETS procedures produce standard form time series data sets. The form a procedure uses depends on whether the procedure is normally used to produce multiple result series for each of many input series in one step (as PROC FORECAST does).

For example, the [ARIMA](#) procedure can output actual series, forecast series, residual series, and confidence limit series just as the FORECAST procedure does. The PROC ARIMA output data set uses the standard form because PROC ARIMA is designed for the detailed analysis of one series at a time and so forecasts only one series at a time.

The following statements show the use of the ARIMA procedure to produce a forecast of the USCPI data set. [Figure 3.7](#) shows part of the output data set that is produced by the ARIMA procedure's FORECAST statement. (The printed output from PROC ARIMA is not shown.) Compare the PROC ARIMA output data set shown in [Figure 3.7](#) with the PROC FORECAST output data set shown in [Figure 3.6](#).

```
title "PROC ARIMA Output Data Set";

proc arima data=uscpi;
  identify var=cpi(1);
  estimate q=1;
  forecast id=date interval=month
           lead=12 out=arimaout;
run;
```

```
proc print data=arimaout (obs=6);
run;
```

Figure 3.7 Partial Listing of Output Data Set Produced by PROC ARIMA

PROC ARIMA Output Data Set							
Obs	date	cpi	FORECAST	STD	L95	U95	RESIDUAL
1	JUN1990	129.9
2	JUL1990	130.4	130.368	0.36160	129.660	131.077	0.03168
3	AUG1990	131.6	130.881	0.36160	130.172	131.590	0.71909
4	SEP1990	132.7	132.354	0.36160	131.645	133.063	0.34584
5	OCT1990	133.5	133.306	0.36160	132.597	134.015	0.19421
6	NOV1990	133.8	134.046	0.36160	133.337	134.754	-0.24552

The output data set produced by the ARIMA procedure's FORECAST statement stores the actual values in a variable with the same name as the response series, stores the forecast series in a variable named FORECAST, stores the residuals in a variable named RESIDUAL, stores the 95% confidence limits in variables named L95 and U95, and stores the standard error of the forecast in the variable STD.

This method of storing several different result series as a standard form time series data set is simple and convenient. However, it works well only for a single input series. The forecast of a single series can be stored in the variable FORECAST. But if two series are forecast, two different FORECAST variables are needed.

The STATESPACE procedure handles this problem by generating forecast variable names FOR1, FOR2, and so forth. The SPECTRA procedure uses a similar method. Names such as FOR1, FOR2, RES1, RES2, and so forth require you to remember the order in which the input series are listed. This is why PROC FORECAST, which is designed to forecast a whole list of input series at once, stores its results in interleaved form.

Other SAS/ETS procedures are often used for a single input series but can also be used to process several series in a single step. Thus, they are not clearly like PROC FORECAST nor clearly like PROC ARIMA in the number of input series they are designed to work with. These procedures use a third method for storing multiple result series in an output data set. These procedures store output time series in standard form (as PROC ARIMA does) but require an OUTPUT statement to give names to the result series.

Time Series Periodicity and Time Intervals

A fundamental characteristic of time series data is how frequently the observations are spaced in time. How often the observations of a time series occur is called the *sampling frequency* or the *periodicity* of the series. For example, a time series with one observation each month has a monthly sampling frequency or monthly periodicity and so is called a monthly time series.

In SAS, data periodicity is described by specifying periodic *time intervals* into which the dates of the observations fall. For example, the SAS time interval MONTH divides time into calendar months.

Many SAS/ETS procedures enable you to specify the periodicity of the input data set with the INTERVAL= option. For example, specifying INTERVAL=MONTH indicates that the procedure should expect the ID variable to contain SAS date values, and that the date value for each observation should fall in a separate calendar month. The EXPAND procedure uses interval name values with the FROM= and TO= options to control the interpolation of time series from one periodicity to another.

SAS also uses time intervals in several other ways. In addition to indicating the periodicity of time series data sets, time intervals are used with the interval functions INTNX and INTCK and for controlling the plot axis and reference lines for plots of data over time.

Specifying Time Intervals

Intervals are specified in SAS by using *interval names* such as YEAR, QTR, MONTH, DAY, and so forth. Table 3.3 summarizes the basic types of intervals.

Table 3.3 Basic Interval Types

Name	Periodicity
YEAR	yearly
SEMIYEAR	semiannual
QTR	quarterly
MONTH	monthly
SEMIMONTH	1st and 16th of each month
TENDAY	1st, 11th, and 21st of each month
WEEK	weekly
WEEKDAY	daily ignoring weekend days
DAY	daily
HOURL	hourly
MINUTE	every minute
SECOND	every second

Interval names can be abbreviated in various ways. For example, you could specify monthly intervals as MONTH, MONTHS, MONTHLY, or just MON. SAS accepts all these forms as equivalent.

Interval names can also be qualified with a multiplier to indicate multi-period intervals. For example, biennial intervals are specified as YEAR2.

Interval names can also be qualified with a shift index to indicate intervals with different starting points. For example, fiscal years starting in July are specified as YEAR.7.

Intervals are classified as either date or datetime intervals. Date intervals are used with SAS date values, while datetime intervals are used with SAS datetime values. The interval types YEAR, SEMIYEAR, QTR, MONTH, SEMIMONTH, TENDAY, WEEK, WEEKDAY, and DAY are date intervals. HOUR, MINUTE, and SECOND are datetime intervals. Date intervals can be turned into datetime intervals for use with

datetime values by prefixing the interval name with ‘DT’. Thus DTMONTH intervals are like MONTH intervals but are used with datetime ID values instead of date ID values.

See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about specifying time intervals and for a detailed reference to the different kinds of intervals available.

Using Intervals with SAS/ETS Procedures

SAS/ETS procedures use the date or datetime interval and the ID variable in the following ways:

- to validate the data periodicity. The ID variable is used to check the data and verify that successive observations have valid ID values that correspond to successive time intervals.
- to check for gaps in the input observations. For example, if INTERVAL=MONTH and an input observation for January 1990 is followed by an observation for April 1990, there is a gap in the input data with two omitted observations.
- to label forecast observations in the output data set. The values of the ID variable for the forecast observations after the end of the input data set are extrapolated according to the frequency specifications of the INTERVAL= option.

Time Intervals, the Time Series Forecasting System, and the Time Series Viewer

Time intervals are used in the Time Series Forecasting System and Time Series Viewer to identify the number of seasonal cycles or seasonality associated with a DATE, DATETIME, or TIME ID variable. For example, monthly time series have a seasonality of 12 because there are 12 months in a year; quarterly time series have a seasonality of 4 because there are four quarters in a year. The seasonality is used to analyze seasonal properties of time series data and to estimate seasonal forecasting methods.

Plotting Time Series

This section discusses SAS procedures that are available for plotting time series data, but it covers only certain aspects of the use of these procedures with time series data.

The Time Series Viewer displays and analyzes time series plots for time series data sets that do not contain cross sections. See Chapter 43, “[Getting Started with Time Series Forecasting](#).”

The SGPLOT procedure produces high resolution color graphics plots. See the *SAS ODS Graphics: Procedures Guide* and *SAS/GRAPH: Reference* for more information.

The PLOT procedure and the TIMEPLOT procedure produce low-resolution line-printer type plots. See the *Base SAS Procedures Guide* for information about these procedures.

Using the Time Series Viewer

The following command starts the Time Series Viewer to display the plot of CPI in the USCPI data set against DATE. (The USCPI data set was shown in the previous example; the time series used in the following example contains more observations than previously shown.)

```
tsvview data=uscpi var=cpi timeid=date
```

The TSVIEW DATA= option specifies the data set to be viewed; the VAR= option specifies the variable that contains the time series observations; the TIMEID= option specifies the time series ID variable.

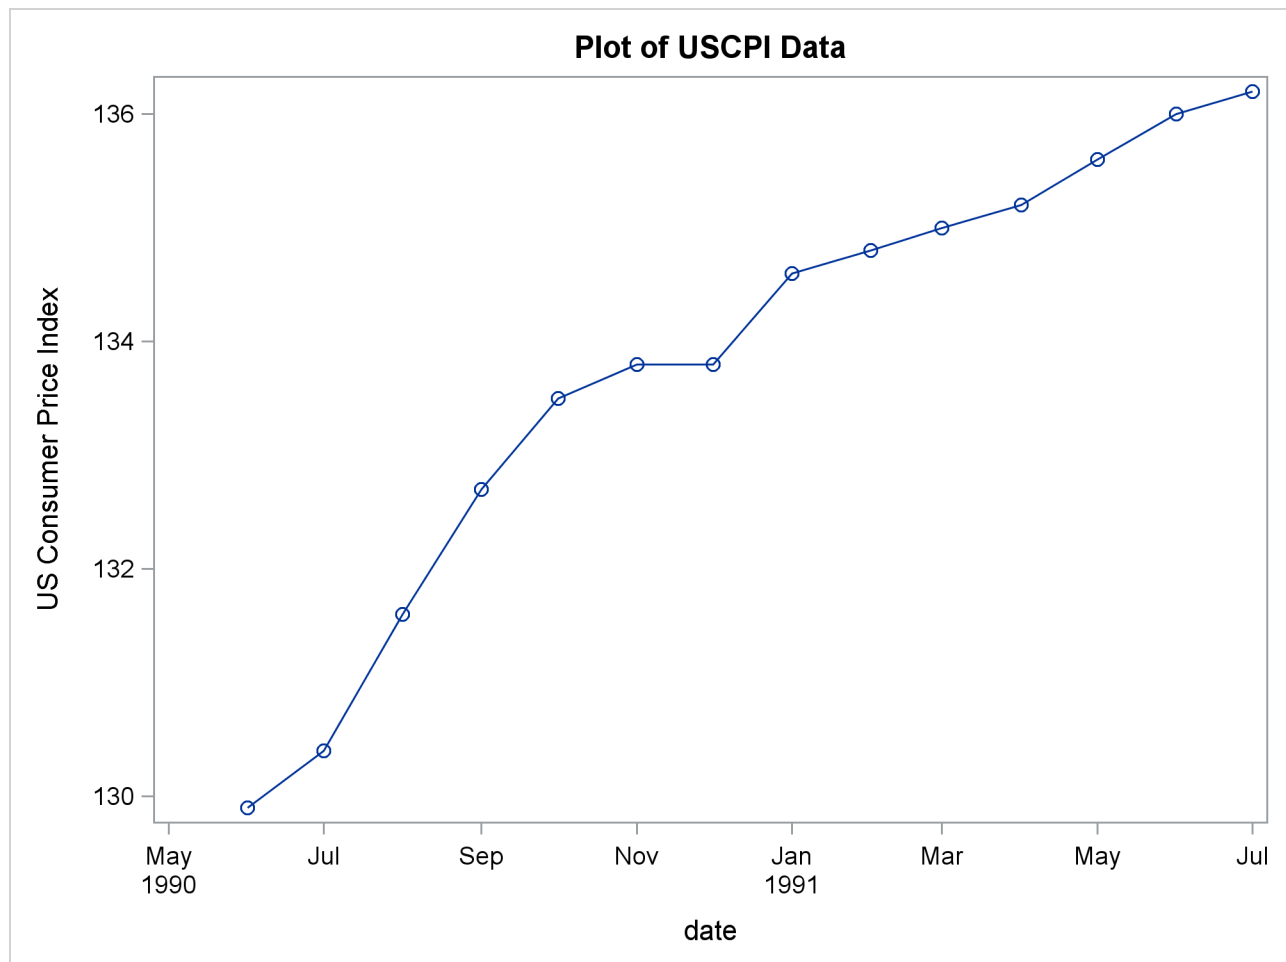
The Time Series Viewer can also be invoked by selecting **Solutions►Analyze►Time Series Viewer** from the menu in the SAS Display Manager.

Using PROC SGPLOT

The following statements use the SGPLOT procedure to plot CPI in the USCPI data set against DATE. (The USCPI data set was shown in a previous example; the data set plotted in the following example contains more observations than shown previously.)

```
title "Plot of USCPI Data";  
proc sgplot data=uscpi;  
    series x=date y=cpi / markers;  
run;
```

The plot is shown in [Figure 3.8](#).

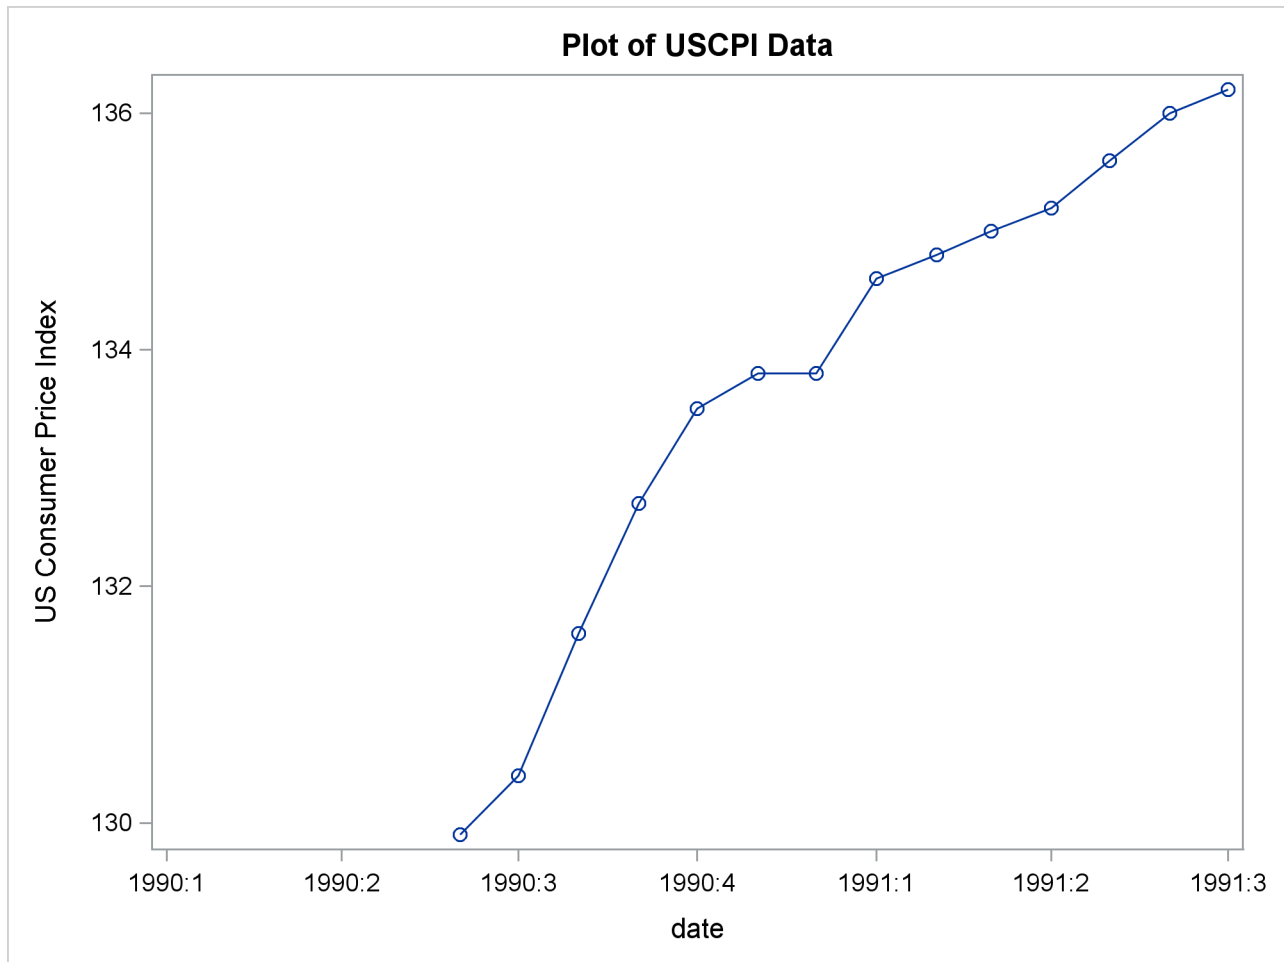
Figure 3.8 Plot of Monthly CPI Over Time

Controlling the Time Axis: Tick Marks and Reference Lines

It is possible to control the spacing of the tick marks on the time axis. The following statements use the XAXIS statement to tell PROC SGPLOT to mark the axis at the start of each quarter:

```
proc sgplot data=uscpi;
  series x=date y=cpi / markers;
  format date yyqc.;
  xaxis values=('1jan90'd to '1jul91'd by qtr);
run;
```

The plot is shown in [Figure 3.9](#).

Figure 3.9 Plot of Monthly CPI Over Time

Overlay Plots of Different Variables

You can plot two or more series stored in different variables on the same graph by specifying multiple plot requests in one SGLOT statement.

For example, the following statements plot the CPI, FORECAST, L95, and U95 variables produced by PROC ARIMA in a previous example. A reference line is drawn to mark the start of the forecast period. Quarterly tick marks with YYQC format date values are used.

```

title "ARIMA Forecasts of CPI";

proc arima data=uscpi;
  identify var=cpi(1);
  estimate q=1;
  forecast id=date interval=month lead=12 out=arimaout;
run;

title "ARIMA forecasts of CPI";
proc sgplot data=arimaout noautolegend;

```



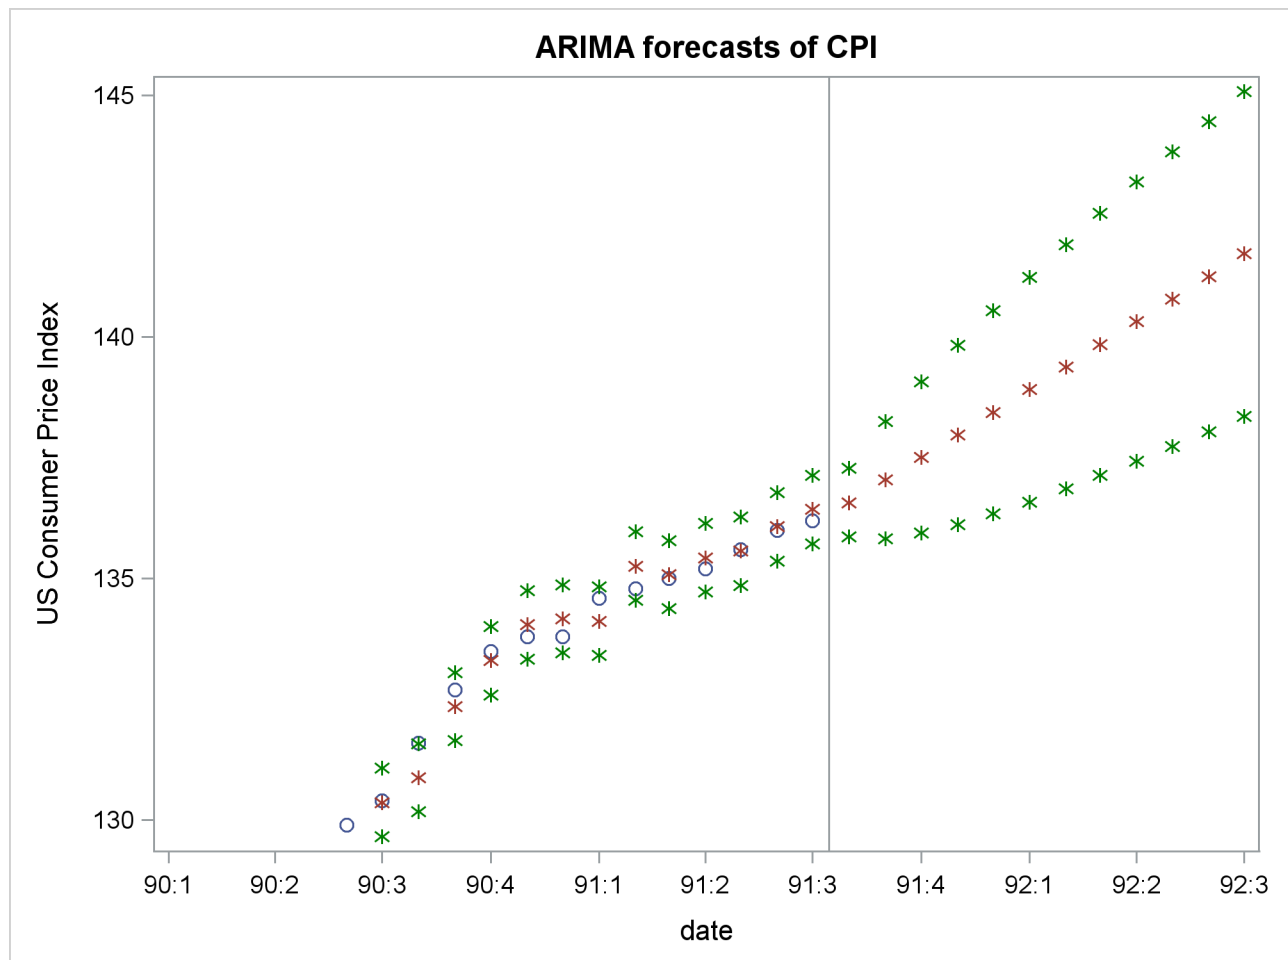
```

scatter x=date y=cpi;
scatter x=date y=forecast / markerattrs=(symbol=asterisk);
scatter x=date y=l95 / markerattrs=(symbol=asterisk color=green);
scatter x=date y=u95 / markerattrs=(symbol=asterisk color=green);
format date yyqc4.;
xaxis values=('1jan90'd to '1jul92'd by qtr);
refline '15jul91'd / axis=x;
run;

```

The plot is shown in [Figure 3.10](#).

Figure 3.10 Plot of ARIMA Forecast



Overlay Plots of Interleaved Series

You can also plot several series on the same graph when the different series are stored in the same variable in interleaved form. Plot interleaved time series by using the values of the ID variable in GROUP= option to distinguish the different series.

The following example plots the output data set produced by PROC FORECAST in a previous example. Since the residual series has a different scale than the other series, it is excluded from the plot with a WHERE statement.

The `_TYPE_` variable is used in the PLOT statement to identify the different series and to select the SCATTER statements to use for each plot.

```

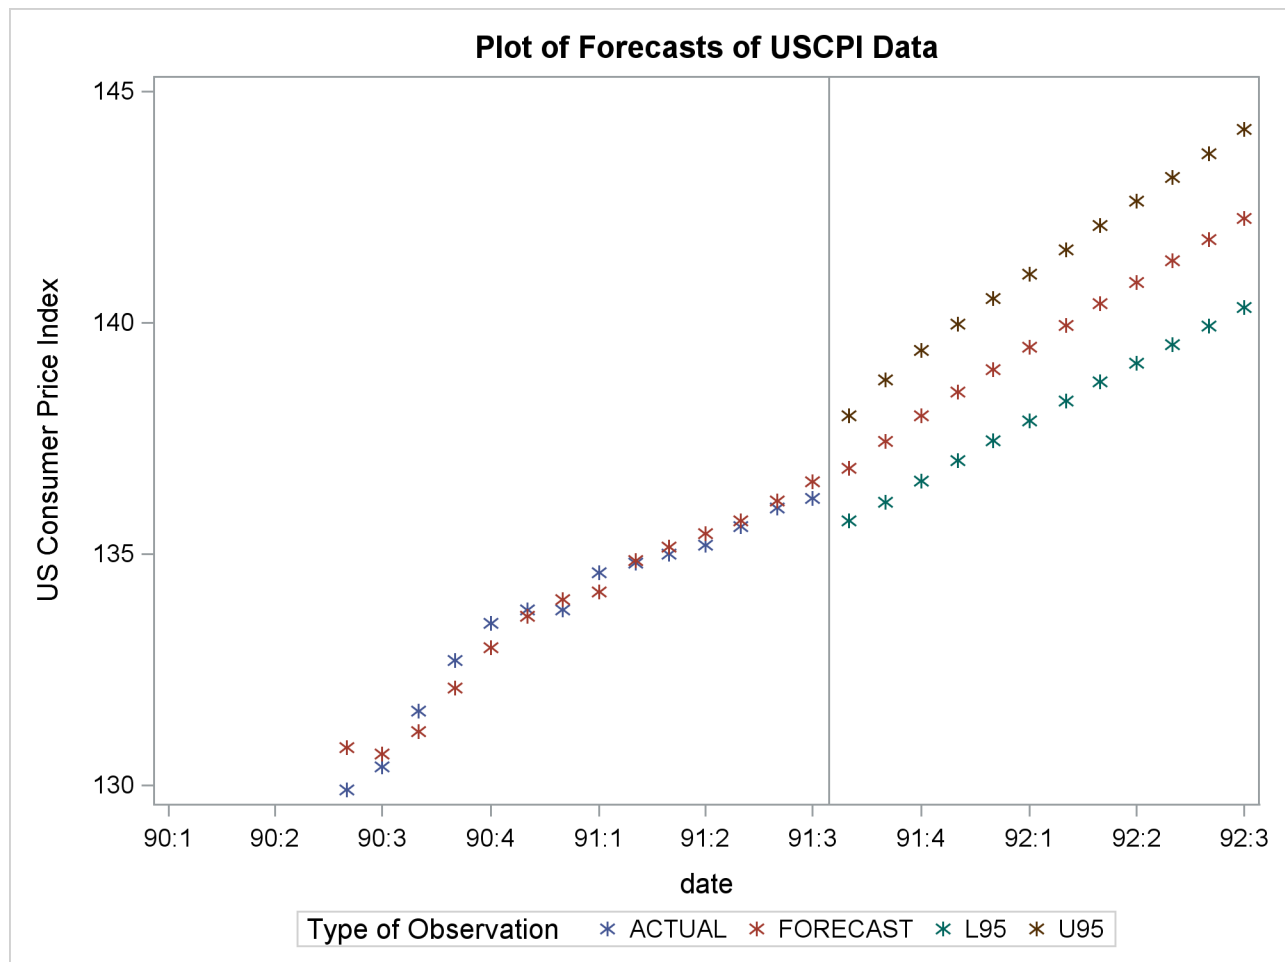
title "Plot of Forecasts of US CPI Data";

proc forecast data=uscpi interval=month lead=12
      out=foreout outfull outresid;
    var cpi;
    id date;
run;

proc sgplot data=foreout;
    where _type_ ^= 'RESIDUAL';
    scatter x=date y=cpi / group=_type_ markerattrs=(symbol=asterisk);
    format date yyqc4.;
    xaxis values=('1jan90'd to '1jul92'd by qtr);
    refline '15jul91'd / axis=x;
run;

```

The plot is shown in [Figure 3.11](#).

Figure 3.11 Plot of Forecast

Residual Plots

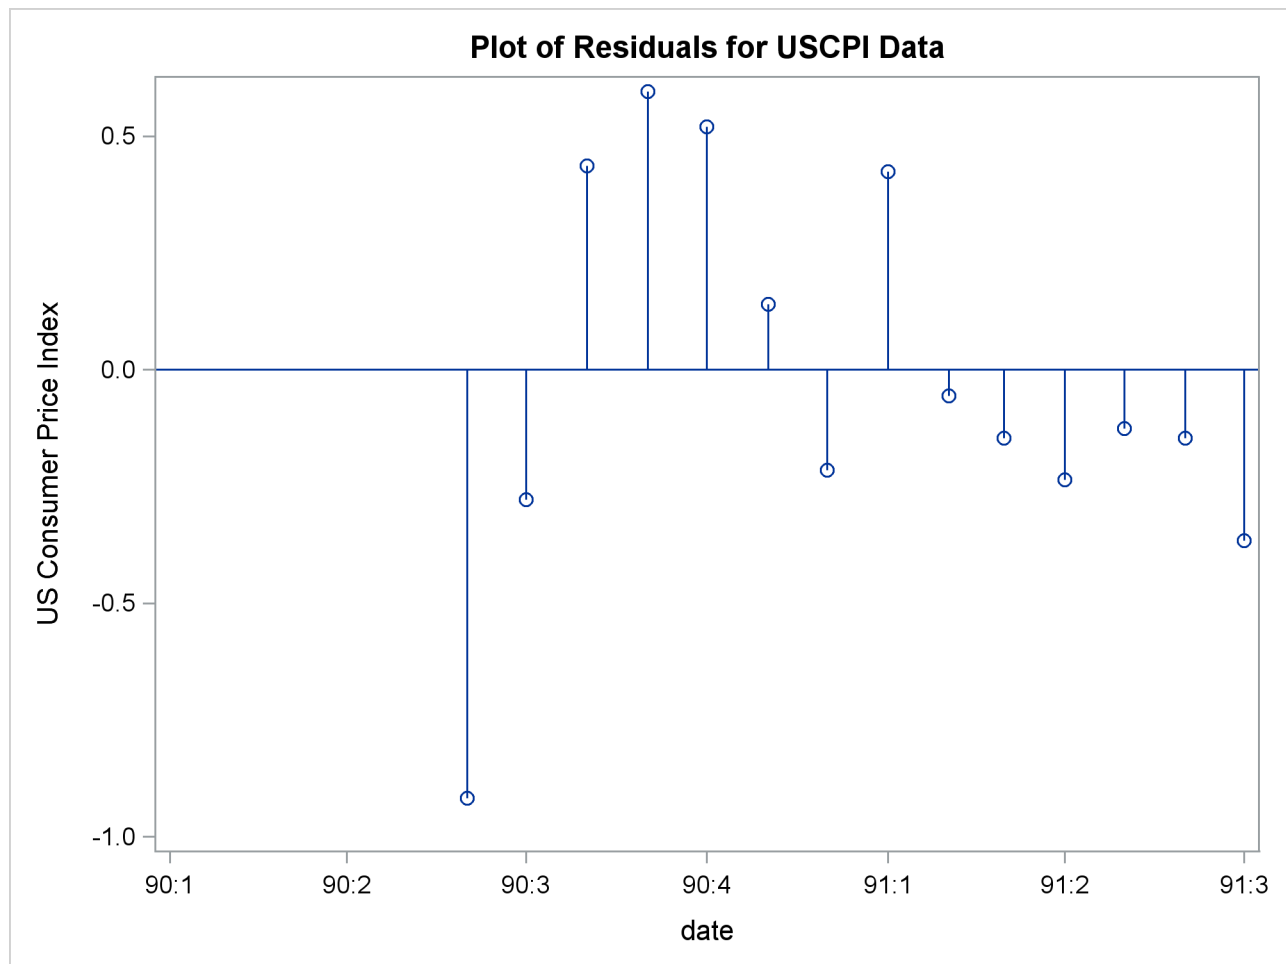
The following example plots the residuals series that was excluded from the plot in the previous example. The NEEDLE statement specifies a needle plot, so that each residual point is plotted as a vertical line showing deviation from zero.

```

title "Plot of Residuals for USCPI Data";
proc sgplot data=foreout;
  where _type_ = 'RESIDUAL';
  needle x=date y=cpi / markers;
  format date yyqc4.;
  xaxis values=('1jan90'd to '1jul91'd by qtr);
run;

```

The plot is shown in [Figure 3.12](#).

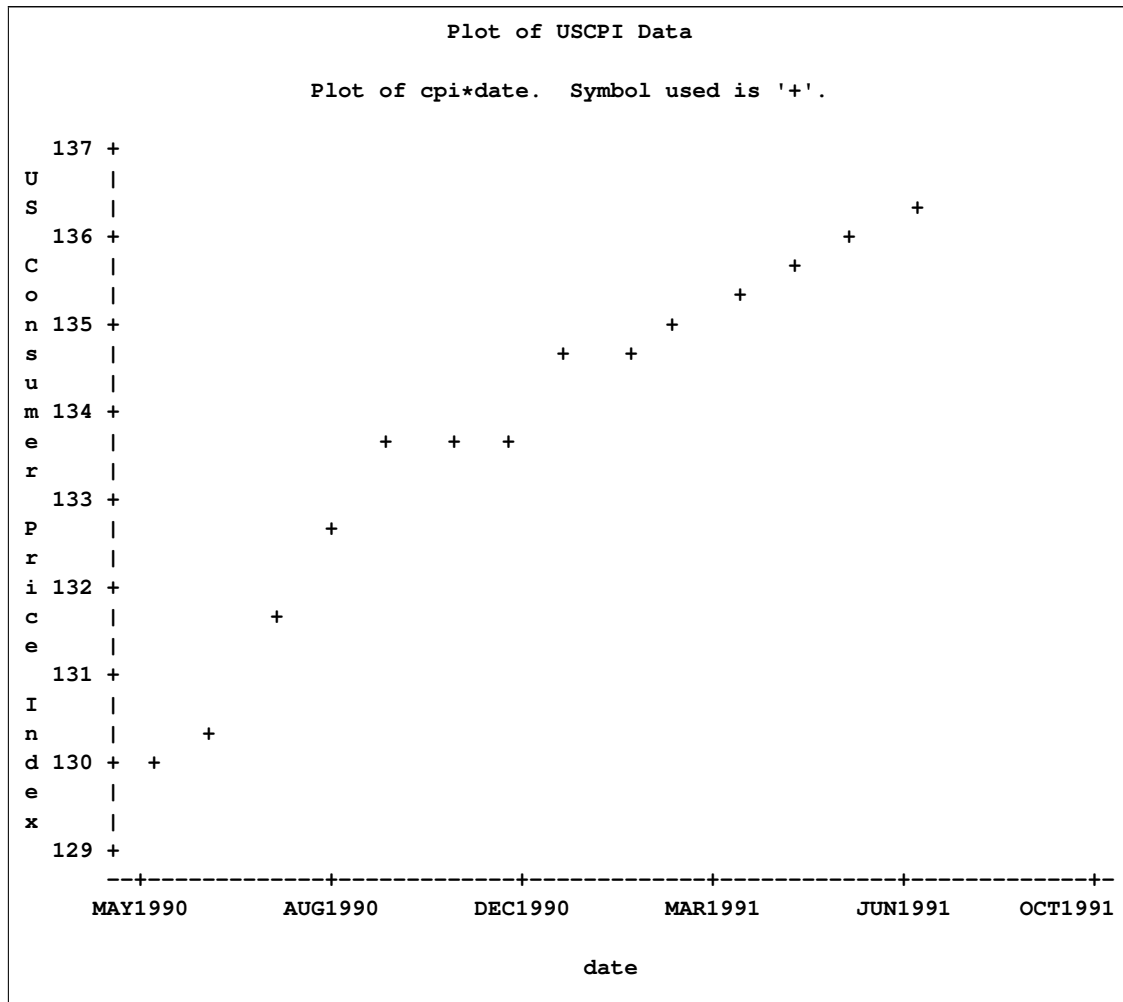
Figure 3.12 Plot of Residuals

Using PROC PLOT

The following statements use the PLOT procedure in Base SAS to plot CPI in the USCPI data set against DATE. (The data set plotted contains more observations than shown in the previous examples.) The plotting character used is a plus sign (+).

```
title "Plot of USCPI Data";
proc plot data=uscpi;
  plot cpi * date = '+' / vaxis= 129 to 137 by 1;
run;
```

The plot is shown in [Figure 3.13](#).

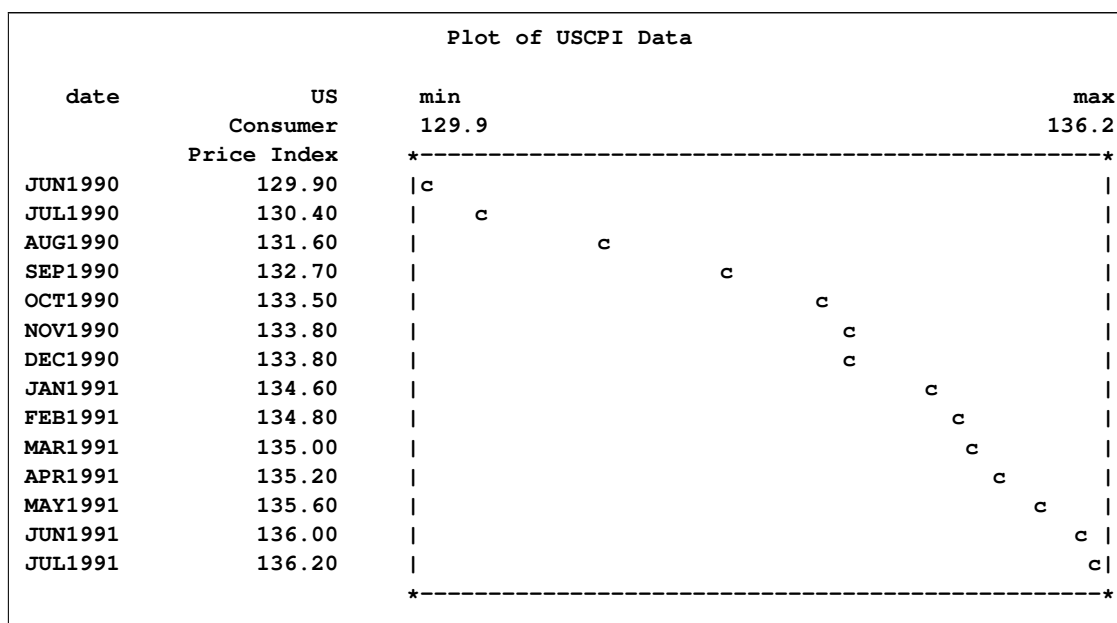
Figure 3.13 Plot of Monthly CPI Over Time

Using PROC TIMEPLOT

The TIMEPLOT procedure in Base SAS plots time series data vertically on the page instead of horizontally across the page as the PLOT procedure does. PROC TIMEPLOT can also print the data values as well as plot them.

The following statements use the TIMEPLOT procedure to plot CPI in the USCPI data set. Only the last 14 observations are included in this example. The plot is shown in [Figure 3.14](#).

```
title "Plot of USCPI Data";
proc timeplot data=uscpi;
  plot cpi;
  id date;
  where date >= '1jun90'd;
run;
```

Figure 3.14 Output Produced by PROC TIMEPLOT

The TIMEPLOT procedure has several interesting features not discussed here. See “The TIMEPLOT Procedure” in the *Base SAS Procedures Guide* for more information.

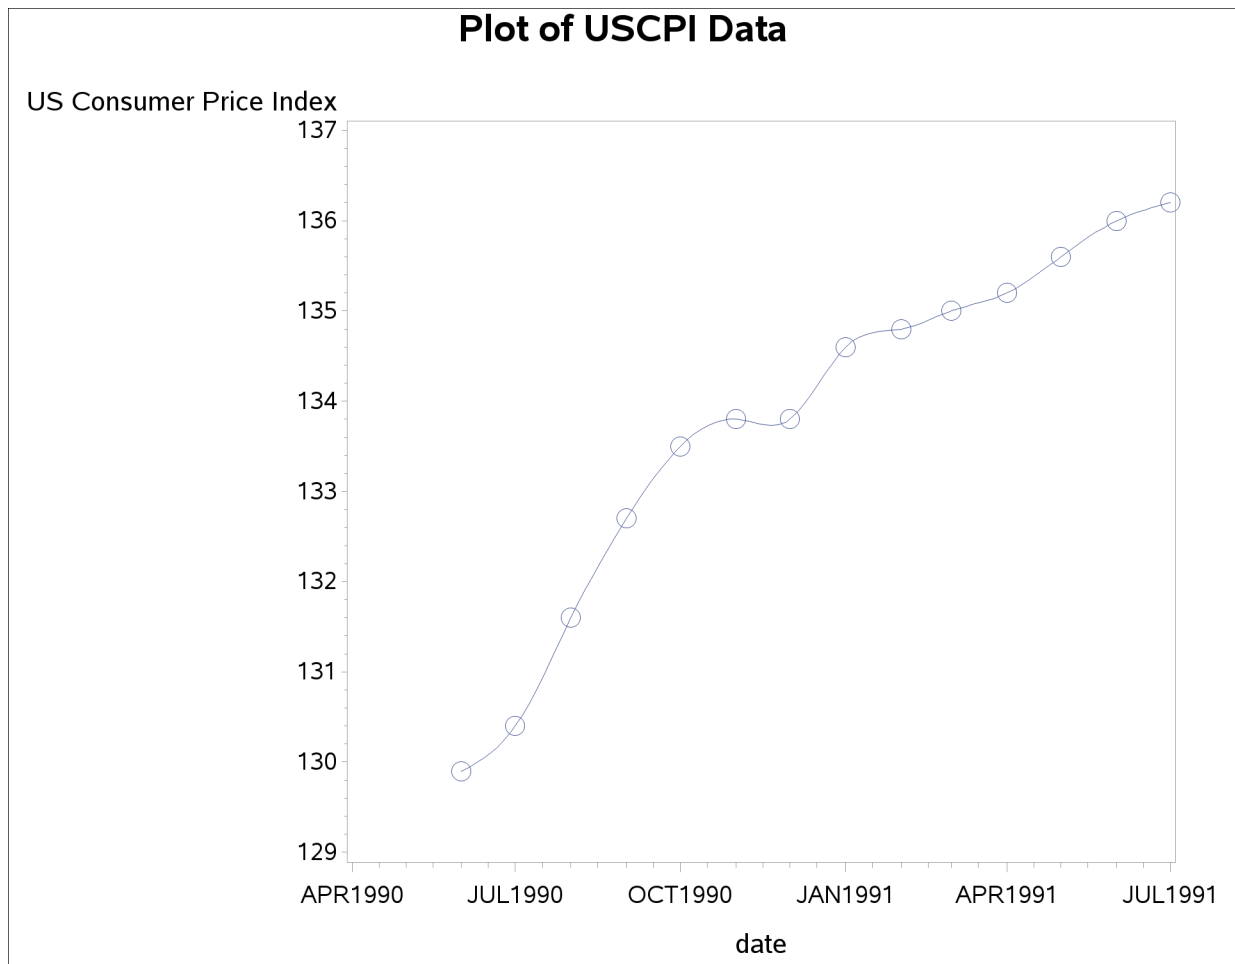
Using PROC GPLOT

The GPLOT procedure in SAS/GRAPH software can also be used to plot time series data, although the newer SGPLOT procedure is easier to use.

The following is an example of how GPLOT can be used to produce a plot similar to the graph produced by PROC SGPLOT in the preceding section.

```
title "Plot of USCPI Data";
proc gplot data=uscpi;
  symbol i=spline v=circle h=2;
  plot cpi * date;
run;
```

The plot is shown in [Figure 3.15](#).

Figure 3.15 Plot of Monthly CPI Over Time

For more information about the GPLOT procedure, see *SAS/GRAPH: Reference*.

Calendar and Time Functions

Calendar and time functions convert calendar and time variables such as YEAR, MONTH, DAY, and HOUR, MINUTE, SECOND into SAS date or datetime values, and vice versa.

The SAS calendar and time functions are DATEJUL, DATEPART, DAY, DHMS, HMS, HOUR, JULDATE, MDY, MINUTE, MONTH, QTR, SECOND, TIMEPART, WEEKDAY, YEAR, and YYQ. See *SAS Language Reference: Dictionary* for more details about these functions.

Computing Dates from Calendar Variables

The MDY function converts MONTH, DAY, and YEAR values to a SAS date value. For example, MDY(2010,17,91) returns the SAS date value '17OCT2010'D.

The YYQ function computes the SAS date for the first day of a quarter. For example, YYQ(2010,4) returns the SAS date value '1OCT2010'D.

The DATEJUL function computes the SAS date for a Julian date. For example, DATEJUL(91290) returns the SAS date '17OCT2010'D.

The YYQ and MDY functions are useful for creating SAS date variables when the ID values recorded in the data are year and quarter; year and month; or year, month, and day.

For example, the following statements read quarterly data from records in which dates are coded as separate year and quarter values. The YYQ function is used to compute the variable DATE.

```
data usecon;
    input year qtr gnp;
    date = yyq( year, qtr );
    format date yyqc.;
datalines;
1990 1 5375.4
1990 2 5443.3

... more lines ...
```

The monthly US CPI data shown in a previous example contained time ID values represented in the MONYY format. If the data records instead contain separate year and month values, the data can be read in and the DATE variable computed with the following statements:

```
data uscpi;
    input month year cpi;
    date = mdy( month, 1, year );
    format date monyy.;
datalines;
6 90 129.9
7 90 130.4

... more lines ...
```

Computing Calendar Variables from Dates

The functions YEAR, MONTH, DAY, WEEKDAY, and JULDATE compute calendar variables from SAS date values.

Returning to the example of reading the USCPI data from records that contain date values represented in the MONYY format, you can find the month and year of each observation from the SAS dates of the observations by using the following statements.

```
data uscpi;
    input date monyy7. cpi;
    format date monyy7.;
    year  = year( date );
    month = month( date );
datalines;
jun1990 129.9
jul1990 130.4

... more lines ...
```

Converting between Date, Datetime, and Time Values

The DATEPART function computes the SAS date value for the date part of a SAS datetime value. The TIMEPART function computes the SAS time value for the time part of a SAS datetime value.

The HMS function computes SAS time values from HOUR, MINUTE, and SECOND time variables. The DHMS function computes a SAS datetime value from a SAS date value and HOUR, MINUTE, and SECOND time variables.

See the section “SAS Date, Time, and Datetime Functions” on page 145 for more information about these functions.

Computing Datetime Values

To compute datetime ID values from calendar and time variables, first compute the date and then compute the datetime with DHMS.

For example, suppose you read tri-hourly temperature data with time recorded as YEAR, MONTH, DAY, and HOUR. The following statements show how to compute the ID variable DATETIME:

```
data weather;
    input year month day hour temp;
    datetime = dhms( mdy( month, day, year ), hour, 0, 0 );
    format datetime datetime10.;
datalines;
91 10 16 21 61
91 10 17 0 56
91 10 17 3 53

... more lines ...
```

Computing Calendar and Time Variables

The functions HOUR, MINUTE, and SECOND compute time variables from SAS datetime values. The DATEPART function and the date-to-calendar variables functions can be combined to compute calendar variables from datetime values.

For example, suppose the date and time of the tri-hourly temperature data in the preceding example were recorded as datetime values in the datetime format. The following statements show how to compute the YEAR, MONTH, DAY, and HOUR of each observation and include these variables in the SAS data set:

```
data weather;
    input datetime : datetime13. temp;
    format datetime datetime10.;
    hour = hour( datetime );
    date = datepart( datetime );
    year = year( date );
    month = month( date );
    day = day( date );
datalines;
16oct91:21:00 61
17oct91:00:00 56
17oct91:03:00 53

... more lines ...
```

Interval Functions INTNX and INTCK

The SAS interval functions INTNX and INTCK perform calculations with date values, datetime values, and time intervals. They can be used for calendar calculations with SAS date values to increment date values or datetime values by intervals and to count time intervals between dates.

The INTNX function increments dates by intervals. INTNX computes the date or datetime of the start of the interval a specified number of intervals from the interval that contains a given date or datetime value.

The form of the INTNX function is

INTNX (*interval*, *from*, *n* < , *alignment* >);

The arguments to the INTNX function are as follows:

interval

is a character constant or variable that contains an interval name

from

is a SAS date value (for date intervals) or datetime value (for datetime intervals)

n

is the number of intervals to increment from the interval that contains the *from* value

alignment

controls the alignment of SAS dates, within the interval, used to identify output observations. Allowed values are BEGINNING, MIDDLE, END, and SAMEDAY.

The number of intervals to increment, *n*, can be positive, negative, or zero.

For example, the statement `NEXTMON=INTNX('MONTH',DATE,1)` assigns to the variable NEXTMON the date of the first day of the month following the month that contains the value of DATE. Thus `INTNX('MONTH','21OCT2007'D,1)` returns the date 1 November 2007.

The INTCK function counts the number of interval boundaries between two date values or between two datetime values.

The form of the INTCK function is

INTCK (*interval*, *from*, *to*) ;

The arguments of the INTCK function are as follows:

interval

is a character constant or variable that contains an interval name

from

is the starting date value (for date intervals) or datetime value (for datetime intervals)

to

is the ending date value (for date intervals) or datetime value (for datetime intervals)

For example, the statement `NEWYEARS=INTCK('YEAR',DATE1,DATE2)` assigns to the variable NEWYEARS the number of New Year's Days between the two dates.

Incrementing Dates by Intervals

Use the INTNX function to increment dates by intervals. For example, suppose you want to know the date of the start of the week that is six weeks from the week of 17 October 1991. The function `INTNX('WEEK','17OCT91'D,6)` returns the SAS date value '24NOV1991'D.

One practical use of the INTNX function is to generate periodic date values. For example, suppose the monthly U.S. Consumer Price Index data in a previous example were recorded without any time identifier on the data records. Given that you know the first observation is for June 1990, the following statements use the INTNX function to compute the ID variable DATE for each observation:

```
data uscpi;
```

```

input cpi;
date = intnx( 'month', '1jun1990'd, _n_-1 );
format date monyy7.;
datalines;
129.9
130.4

... more lines ...

```

The automatic variable `_N_` counts the number of times the DATA step program has executed; in this case `_N_` contains the observation number. Thus `_N_-1` is the increment needed from the first observation date. Alternatively, you could increment from the month before the first observation, in which case the INTNX function in this example would be written `INTNX('MONTH','1MAY1990'D,_N_)`.

Alignment of SAS Dates

Any date within the time interval that corresponds to an observation of a periodic time series can serve as an ID value for the observation. For example, the USCPI data in a previous example might have been recorded with dates at the 15th of each month. The person recording the data might reason that since the CPI values are monthly averages, midpoints of the months might be the appropriate ID values.

However, as far as SAS/ETS procedures are concerned, what is important about monthly data is the month of each observation, not the exact date of the ID value. If you indicate that the data are monthly (with an `INTERVAL=MONTH`) option, SAS/ETS procedures ignore the day of the month in processing the ID variable. The `MONYY` format also ignores the day of the month.

Thus, you could read in the monthly USCPI data with mid-month DATE values by using the following statements:

```

data uscpi;
input date : date9. cpi;
format date monyy7.;
datalines;
15jun1990 129.9
15jul1990 130.4

... more lines ...

```

The results of using this version of the USCPI data set for analysis with SAS/ETS procedures would be the same as with first-of-month values for DATE. Although you can use any date within the interval as an ID value for the interval, you might find working with time series in SAS less confusing if you always use date ID values normalized to the start of the interval.

For some applications it might be preferable to use end of period dates, such as 31Jan1994, 28Feb1994, 31Mar1994, ..., 31Dec1994. For other applications, such as plotting time series, it might be more convenient to use interval midpoint dates to identify the observations.

(Some SAS/ETS procedures provide an `ALIGN=` option to control the alignment of dates for output time series observations. In addition, the `INTNX` library function supports an optional argument to specify the alignment of the returned date value.)

To normalize date values to the start of intervals, use the `INTNX` function with a 0 increment. The `INTNX` function with an increment of 0 computes the date of the first day of the interval (or the first second of the interval for datetime values).

For example, `INTNX('MONTH','17OCT1991'D,0,'BEG')` returns the date `'1OCT1991'D`.

The following statements show how the preceding example can be changed to normalize the mid-month `DATE` values to first-of-month and end-of-month values. For exposition, the first-of-month value is transformed back into a middle-of-month value.

```
data uscpi;
  input date : date9. cpi;
  format date monyy7.;
  monthbeg = intnx( 'month', date, 0, 'beg' );
  midmonth = intnx( 'month', monthbeg, 0, 'mid' );
  monthend = intnx( 'month', date, 0, 'end' );
datalines;
15jun1990 129.9
15jul1990 130.4

... more lines ...
```

If you want to compute the date of a particular day within an interval, you can use calendar functions, or you can increment the starting date of the interval by a number of days. The following example shows three ways to compute the seventh day of the month:

```
data test;
  set uscpi;
  mon07_1 = mdy( month(date), 7, year(date) );
  mon07_2 = intnx( 'month', date, 0, 'beg' ) + 6;
  mon07_3 = intnx( 'day', date, 6 );
run;
```

Computing the Width of a Time Interval

To compute the width of a time interval, subtract the ID value of the start of the next interval from the ID value of the start of the current interval. If the ID values are SAS dates, the width is in days. If the ID values are SAS datetime values, the width is in seconds.

For example, the following statements show how to add a variable `WIDTH` to the `USCPI` data set that contains the number of days in the month for each observation:

```
data uscpi;
  input date : date9. cpi;
  format date monyy7.;
  width = intnx( 'month', date, 1 ) - intnx( 'month', date, 0 );
datalines;
```

```
15jun1990 129.9
15jul1990 130.4
15aug1990 131.6

... more lines ...
```

Computing the Ceiling of an Interval

To shift a date to the start of the next interval if it is not already at the start of an interval, subtract 1 from the date and use INTNX to increment the date by 1 interval.

For example, the following statements add the variable NEWYEAR to the monthly USCPI data set. The variable NEWYEAR contains the date of the next New Year's Day. NEWYEAR contains the same value as DATE when the DATE value is the start of year and otherwise contains the date of the start of the next year.

```
data test;
  set uscpi;
  newyear = intnx( 'year', date - 1, 1 );
  format newyear date.;
run;
```

Counting Time Intervals

Use the INTCK function to count the number of interval boundaries between two dates.

Note that the INTCK function counts the number of times the beginning of an interval is reached in moving from the first date to the second. It does not count the number of complete intervals between two dates. Following are two examples:

- The function INTCK('MONTH', '1JAN1991'D, '31JAN1991'D) returns 0, since the two dates are within the same month.
- The function INTCK('MONTH', '31JAN1991'D, '1FEB1991'D) returns 1, since the two dates lie in different months that are one month apart.

When the first date is later than the second date, INTCK returns a negative count. For example, the function INTCK('MONTH', '1FEB1991'D, '31JAN1991'D) returns -1.

The following example shows how to use the INTCK function with shifted interval specifications to count the number of Sundays, Mondays, Tuesdays, and so forth, in each month. The variables NSUNDAY, NMONDAY, NTUESDAY, and so forth, are added to the USCPI data set.

```
data uscpi;
  set uscpi;
```

```

d0 = intnx( 'month', date, 0 ) - 1;
d1 = intnx( 'month', date, 1 ) - 1;
nSunday   = intck( 'week.1', d0, d1 );
nMonday   = intck( 'week.2', d0, d1 );
nTuesday  = intck( 'week.3', d0, d1 );
nWedday   = intck( 'week.4', d0, d1 );
nThursday = intck( 'week.5', d0, d1 );
nFriday   = intck( 'week.6', d0, d1 );
nSaturday = intck( 'week.7', d0, d1 );
drop d0 d1;
run;

```

Since the INTCK function counts the number of interval beginning dates between two dates, the number of Sundays is computed by counting the number of week boundaries between the last day of the previous month and the last day of the current month. To count Mondays, Tuesdays, and so forth, shifted week intervals are used. The interval type WEEK.2 specifies weekly intervals starting on Mondays, WEEK.3 specifies weeks starting on Tuesdays, and so forth.

Checking Data Periodicity

Suppose you have a time series data set and you want to verify that the data periodicity is correct, the observations are dated correctly, and the data set is sorted by date. You can use the INTCK function to compare the date of the current observation with the date of the previous observation and verify that the dates fall into consecutive time intervals.

For example, the following statements verify that the data set USCPI is a correctly dated monthly data set. The RETAIN statement is used to hold the date of the previous observation, and the automatic variable `_N_` is used to start the verification process with the second observation.

```

data _null_;
  set uscpi;
  retain prevdate;
  if _n_ > 1 then
    if intck( 'month', prevdate, date ) ^= 1 then
      put "Bad date sequence at observation number " _n_;
  prevdate = date;
run;

```

Filling In Omitted Observations in a Time Series Data Set

Most SAS/ETS procedures expect input data to be in the standard form, with no omitted observations in the sequence of time periods. When data are missing for a time period, the data set should contain a missing observation, in which all variables except the ID variables have missing values.

You can replace omitted observations in a time series data set with missing observations with the [EXPAND](#) procedure.

The following statements create a monthly data set, OMITTED, from data lines that contain records for an intermittent sample of months. (Data values are not shown.) The OMITTED data set is sorted to make sure it is in time order.

```
data omitted;
    input date : monyy7. x y z;
    format date monyy7.;
datalines;
jan1991  ...
mar1991  ...
apr1991  ...
jun1991  ...
... etc. ...
;

proc sort data=omitted;
    by date;
run;
```

This data set is converted to a standard form time series data set by the following PROC EXPAND step. The TO= option specifies that monthly data is to be output, while the METHOD=NONE option specifies that no interpolation is to be performed, so that the variables X, Y, and Z in the output data set STANDARD will have missing values for the omitted time periods that are filled in by the EXPAND procedure.

```
proc expand data=omitted
            out=standard
            to=month
            method=none;
    id date;
run;
```

Using Interval Functions for Calendar Calculations

With a little thought, you can come up with a formula that involves INTNX and INTCK functions and different interval types to perform almost any calendar calculation.

For example, suppose you want to know the date of the third Wednesday in the month of October 1991. The answer can be computed as

```
intnx( 'week.4', '1oct91'd - 1, 3 )
```

which returns the SAS date value '16OCT91'D.

Consider this more complex example: how many weekdays are there between 17 October 1991 and the second Friday in November 1991, inclusive? The following formula computes the number of weekdays between the date value contained in the variable DATE and the second Friday of the following month (including the ending dates of this period):


```
n = intck( 'weekday', date - 1,
          intnx( 'week.6', intnx( 'month', date, 1 ) - 1, 2 ) + 1 );
```

Setting DATE to '17OCT91'D and applying this formula produces the answer, N=17.

Lags, Leads, Differences, and Summations

When working with time series data, you sometimes need to refer to the values of a series in previous or future periods. For example, the usual interest in the consumer price index series shown in previous examples is how fast the index is changing, rather than the actual level of the index. To compute a percent change, you need both the current and the previous values of the series. When you model a time series, you might want to use the previous values of other series as explanatory variables.

This section discusses how to use the DATA step to perform operations over time: lags, differences, leads, summations over time, and percent changes.

The EXPAND procedure can also be used to perform many of these operations; see Chapter 15, “[The EXPAND Procedure](#),” for more information. See also the section “[Transforming Time Series](#)” on page 112.

The LAG and DIF Functions

The DATA step provides two functions, LAG and DIF, for accessing previous values of a variable or expression. These functions are useful for computing lags and differences of series.

For example, the following statements add the variables CPILAG and CPIDIF to the USCPI data set. The variable CPILAG contains lagged values of the CPI series. The variable CPIDIF contains the changes of the CPI series from the previous period; that is, CPIDIF is CPI minus CPILAG. The new data set is shown in part in [Figure 3.16](#).

```
data uscpi;
    set uscpi;
    cpilag = lag( cpi );
    cpidif = dif( cpi );
run;

proc print data=uscpi;
run;
```

Figure 3.16 USCPI Data Set with Lagged and Differenced Series

Plot of USCPI Data				
Obs	date	cpi	cpilag	cpidif
1	JUN1990	129.9	.	.
2	JUL1990	130.4	129.9	0.5
3	AUG1990	131.6	130.4	1.2
4	SEP1990	132.7	131.6	1.1
5	OCT1990	133.5	132.7	0.8
6	NOV1990	133.8	133.5	0.3
7	DEC1990	133.8	133.8	0.0
8	JAN1991	134.6	133.8	0.8
9	FEB1991	134.8	134.6	0.2
10	MAR1991	135.0	134.8	0.2
11	APR1991	135.2	135.0	0.2
12	MAY1991	135.6	135.2	0.4
13	JUN1991	136.0	135.6	0.4
14	JUL1991	136.2	136.0	0.2

Understanding the DATA Step LAG and DIF Functions

When used in this simple way, LAG and DIF act as lag and difference functions. However, it is important to keep in mind that, despite their names, the LAG and DIF functions available in the DATA step are not true lag and difference functions.

Rather, LAG and DIF are queuing functions that remember and return argument values from previous calls. The LAG function remembers the value you pass to it and returns as its result the value you passed to it on the previous call. The DIF function works the same way but returns the difference between the current argument and the remembered value. (LAG and DIF return a missing value the first time the function is called.)

A true lag function does not return the value of the argument for the “previous call,” as do the DATA step LAG and DIF functions. Instead, a true lag function returns the value of its argument for the “previous observation,” regardless of the sequence of previous calls to the function. Thus, for a true lag function to be possible, it must be clear what the “previous observation” is.

If the data are sorted chronologically, then LAG and DIF act as true lag and difference functions. If in doubt, use PROC SORT to sort your data before using the LAG and DIF functions. Beware of missing observations, which can cause LAG and DIF to return values that are not the actual lag and difference values.

The DATA step is a powerful tool that can read any number of observations from any number of input files or data sets, can create any number of output data sets, and can write any number of output observations to any of the output data sets, all in the same program. Thus, in general, it is not clear what “previous observation” means in a DATA step program. In a DATA step program, the “previous observation” exists only if you write the program in a simple way that makes this concept meaningful.

Since, in general, the previous observation is not clearly defined, it is not possible to make true lag or difference functions for the DATA step. Instead, the DATA step provides queuing functions that make it easy to compute lags and differences.

Pitfalls of DATA Step LAG and DIF Functions

The LAG and DIF functions compute lags and differences provided that the sequence of calls to the function corresponds to the sequence of observations in the output data set. However, any complexity in the DATA step that breaks this correspondence causes the LAG and DIF functions to produce unexpected results.

For example, suppose you want to add the variable CPILAG to the USCPI data set, as in the previous example, and you also want to subset the series to 1991 and later years. You might use the following statements:

```
data subset;
  set uscpi;
  if date >= '1jan1991'd;
  cpilag = lag( cpi ); /* WRONG PLACEMENT! */
run;
```

If the subsetting IF statement comes before the LAG function call, the value of CPILAG will be missing for January 1991, even though a value for December 1990 is available in the USCPI data set. To avoid losing this value, you must rearrange the statements to ensure that the LAG function is actually executed for the December 1990 observation.

```
data subset;
  set uscpi;
  cpilag = lag( cpi );
  if date >= '1jan1991'd;
run;
```

In other cases, the subsetting statement should come before the LAG and DIF functions. For example, the following statements subset the FOREOUT data set shown in a previous example to select only _TYPE_=RESIDUAL observations and also to compute the variable LAGRESID:

```
data residual;
  set foreout;
  if _type_ = "RESIDUAL";
  lagresid = lag( cpi );
run;
```

Another pitfall of LAG and DIF functions arises when they are used to process time series cross-sectional data sets. For example, suppose you want to add the variable CPILAG to the CPICITY data set shown in a previous example. You might use the following statements:

```
data cpicity;
  set cpicity;
  cpilag = lag( cpi );
run;
```

However, these statements do not yield the desired result. In the data set produced by these statements, the value of CPILAG for the first observation for the first city is missing (as it should be), but in the first observation for all later cities, CPILAG contains the last value for the previous city. To correct this, set the lagged variable to missing at the start of each cross section, as follows:

```
data cpicity;
```

```

set cpicity;
by city date;
cpilag = lag( cpi );
if first.city then cpilag = .;
run;

```

Alternatives to LAG and DIF Functions

You can also use the [EXPAND](#) procedure to compute lags and differences. For example, the following statements compute lag and difference variables for CPI:

```

proc expand data=uscpi out=uscpi method=none;
  id date;
  convert cpi=cpilag / transform=( lag 1 );
  convert cpi=cpidif / transform=( dif 1 );
run;

```

You can also calculate lags and differences in the DATA step without using LAG and DIF functions. For example, the following statements add the variables CPILAG and CPIDIF to the USCPI data set:

```

data uscpi;
  set uscpi;
  retain cpilag;
  cpidif = cpi - cpilag;
  output;
  cpilag = cpi;
run;

```

The RETAIN statement prevents the DATA step from reinitializing CPILAG to a missing value at the start of each iteration and thus allows CPILAG to retain the value of CPI assigned to it in the last statement. The OUTPUT statement causes the output observation to contain values of the variables before CPILAG is reassigned the current value of CPI in the last statement. This is the approach that must be used if you want to build a variable that is a function of its previous lags.

LAG and DIF Functions in PROC MODEL

The preceding discussion of LAG and DIF functions applies to LAG and DIF functions available in the DATA step. However, LAG and DIF functions are also used in the MODEL procedure.

The [MODEL](#) procedure LAG and DIF functions do not work like the DATA step LAG and DIF functions. The LAG and DIF functions supported by PROC MODEL are true lag and difference functions, not queuing functions.

Unlike the DATA step, the MODEL procedure processes observations from a single input data set, so the “previous observation” is always clearly defined in a PROC MODEL program. Therefore, PROC MODEL is able to define LAG and DIF as true lagging functions that operate on values from the previous observation. See Chapter 19, “[The MODEL Procedure](#),” for more information about LAG and DIF functions in the MODEL procedure.

Multi-period Lags and Higher-Order Differencing

To compute lags at a lagging period greater than 1, add the lag length to the end of the LAG keyword to specify the lagging function needed. For example, the LAG2 function returns the value of its argument two calls ago, the LAG3 function returns the value of its argument three calls ago, and so forth.

To compute differences at a lagging period greater than 1, add the lag length to the end of the DIF keyword. For example, the DIF2 function computes the differences between the value of its argument and the value of its argument two calls ago. (The maximum lagging period is 100.)

The following statements add the variables CPILAG12 and CPIDIF12 to the USCPI data set. CPILAG12 contains the value of CPI from the same month one year ago. CPIDIF12 contains the change in CPI from the same month one year ago. (In this case, the first 12 values of CPILAG12 and CPIDIF12 are missing.)

```
data uscpi;
  set uscpi;
  cpilag12 = lag12( cpi );
  cpidif12 = dif12( cpi );
run;
```

To compute second differences, take the difference of the difference. To compute higher-order differences, nest DIF functions to the order needed. For example, the following statements compute the second difference of CPI:

```
data uscpi;
  set uscpi;
  cpi2dif = dif( dif( cpi ) );
run;
```

Multi-period lags and higher-order differencing can be combined. For example, the following statements compute monthly changes in the inflation rate, with inflation rate computed as percent change in CPI from the same month one year ago:

```
data uscpi;
  set uscpi;
  infchnng = dif( 100 * dif12( cpi ) / lag12( cpi ) );
run;
```

Percent Change Calculations

There are several common ways to compute the percent change in a time series. This section illustrates the use of LAG and DIF functions by showing SAS statements for various kinds of percent change calculations.

Computing Period-to-Period Change

To compute percent change from the previous period, divide the difference of the series by the lagged value of the series and multiply by 100.

```
data uscpi;
  set uscpi;
  pctchnng = dif( cpi ) / lag( cpi ) * 100;
  label pctchnng = "Monthly Percent Change, At Monthly Rates";
run;
```

Often, changes from the previous period are expressed at annual rates. This is done by exponentiation of the current-to-previous period ratio to the number of periods in a year and expressing the result as a percent change. For example, the following statements compute the month-over-month change in CPI as a percent change at annual rates:

```
data uscpi;
  set uscpi;
  pctchnng = ( ( cpi / lag( cpi ) ) ** 12 - 1 ) * 100;
  label pctchnng = "Monthly Percent Change, At Annual Rates";
run;
```

Computing Year-over-Year Change

To compute percent change from the same period in the previous year, use LAG and DIF functions with a lagging period equal to the number of periods in a year. (For quarterly data, use LAG4 and DIF4. For monthly data, use LAG12 and DIF12.)

For example, the following statements compute monthly percent change in CPI from the same month one year ago:

```
data uscpi;
  set uscpi;
  pctchnng = dif12( cpi ) / lag12( cpi ) * 100;
  label pctchnng = "Percent Change from One Year Ago";
run;
```

To compute year-over-year percent change measured at a given period within the year, subset the series of percent changes from the same period in the previous year to form a yearly data set. Use an IF or WHERE statement to select observations for the period within each year on which the year-over-year changes are based.

For example, the following statements compute year-over-year percent change in CPI from December of the previous year to December of the current year:

```
data annual;
  set uscpi;
  pctchnng = dif12( cpi ) / lag12( cpi ) * 100;
  label pctchnng = "Percent Change: December to December";
  if month( date ) = 12;
  format date year4.;
run;
```

Computing Percent Change in Yearly Averages

To compute changes in yearly averages, first aggregate the series to an annual series by using the EXPAND procedure, and then compute the percent change of the annual series. (See Chapter 15, “The EXPAND Procedure,” for more information about PROC EXPAND.)

For example, the following statements compute percent changes in the annual averages of CPI:

```
proc expand data=uscpi out=annual from=month to=year;
    convert cpi / observed=average method=aggregate;
run;

data annual;
    set annual;
    pctchnng = dif( cpi ) / lag( cpi ) * 100;
    label pctchnng = "Percent Change in Yearly Averages";
run;
```

It is also possible to compute percent change in the average over the most recent yearly span. For example, the following statements compute monthly percent change in the average of CPI over the most recent 12 months from the average over the previous 12 months:

```
data uscpi;
    retain sum12 0;
    drop sum12 ave12 cpilag12;
    set uscpi;
    sum12 = sum12 + cpi;
    cpilag12 = lag12( cpi );
    if cpilag12 ^= . then sum12 = sum12 - cpilag12;
    if lag11( cpi ) ^= . then ave12 = sum12 / 12;
    pctchnng = dif12( ave12 ) / lag12( ave12 ) * 100;
    label pctchnng = "Percent Change in 12 Month Moving Ave.";
run;
```

This example is a complex use of LAG and DIF functions that requires care in handling the initialization of the moving-window averaging process. The LAG12 of CPI is checked for missing values to determine when more than 12 values have been accumulated, and older values must be removed from the moving sum. The LAG11 of CPI is checked for missing values to determine when at least 12 values have been accumulated; AVE12 will be missing when LAG11 of CPI is missing. The DROP statement prevents temporary variables from being added to the data set.

Note that the DIF and LAG functions must execute for every observation, or the queues of remembered values will not operate correctly. The CPILAG12 calculation must be separate from the IF statement. The PCTCHNG calculation must not be conditional on the IF statement.

The EXPAND procedure provides an alternative way to compute moving averages.

Leading Series

Although the SAS System does not provide a function to look ahead at the “next” value of a series, there are a couple of ways to perform this task.

The most direct way to compute leads is to use the EXPAND procedure. For example:

```
proc expand data=uscpi out=uscpi method=none;
  id date;
  convert cpi=cpilead1 / transform=( lead 1 );
  convert cpi=cpilead2 / transform=( lead 2 );
run;
```

Another way to compute lead series in SAS software is by lagging the time ID variable, renaming the series, and merging the result data set back with the original data set.

For example, the following statements add the variable CPILEAD to the USCPI data set. The variable CPILEAD contains the value of CPI in the following month. (The value of CPILEAD is missing for the last observation, of course.)

```
data temp;
  set uscpi;
  keep date cpi;
  rename cpi = cpilead;
  date = lag( date );
  if date ^= .;
run;

data uscpi;
  merge uscpi temp;
  by date;
run;
```

To compute leads at different lead lengths, you must create one temporary data set for each lead length. For example, the following statements compute CPILEAD1 and CPILEAD2, which contain leads of CPI for 1 and 2 periods, respectively:

```
data temp1(rename=(cpi=cpilead1))
  temp2(rename=(cpi=cpilead2));
  set uscpi;
  keep date cpi;
  date = lag( date );
  if date ^= . then output temp1;
  date = lag( date );
  if date ^= . then output temp2;
run;

data uscpi;
  merge uscpi temp1 temp2;
  by date;
run;
```


Summing Series

Simple cumulative sums are easy to compute using SAS sum statements. The following statements show how to compute the running sum of variable X in data set A, adding XSUM to the data set.

```
data a;
  set a;
  xsum + x;
run;
```

The SAS sum statement automatically retains the variable XSUM and initializes it to 0, and the sum statement treats missing values as 0. The sum statement is equivalent to using a RETAIN statement and the SUM function. The previous example could also be written as follows:

```
data a;
  set a;
  retain xsum;
  xsum = sum( xsum, x );
run;
```

You can also use the EXPAND procedure to compute summations. For example:

```
proc expand data=a out=a method=none;
  convert x=xsum / transform=( sum );
run;
```

Like differencing, summation can be done at different lags and can be repeated to produce higher-order sums. To compute sums over observations separated by lags greater than 1, use the LAG and SUM functions together, and use a RETAIN statement that initializes the summation variable to zero.

For example, the following statements add the variable XSUM2 to data set A. XSUM2 contains the sum of every other observation, with even-numbered observations containing a cumulative sum of values of X from even observations, and odd-numbered observations containing a cumulative sum of values of X from odd observations.

```
data a;
  set a;
  retain xsum2 0;
  xsum2 = sum( lag( xsum2 ), x );
run;
```

Assuming that A is a quarterly data set, the following statements compute running sums of X for each quarter. XSUM4 contains the cumulative sum of X for all observations for the same quarter as the current quarter. Thus, for a first-quarter observation, XSUM4 contains a cumulative sum of current and past first-quarter values.

```

data a;
  set a;
  retain xsum4 0;
  xsum4 = sum( lag3( xsum4 ), x );
run;

```

To compute higher-order sums, repeat the preceding process and sum the summation variable. For example, the following statements compute the first and second summations of X:

```

data a;
  set a;
  xsum + x;
  x2sum + xsum;
run;

```

The following statements compute the second order four-period sum of X:

```

data a;
  set a;
  retain xsum4 x2sum4 0;
  xsum4 = sum( lag3( xsum4 ), x );
  x2sum4 = sum( lag3( x2sum4 ), xsum4 );
run;

```

You can also use PROC EXPAND to compute cumulative statistics and moving window statistics. See Chapter 15, “[The EXPAND Procedure](#),” for details.

Transforming Time Series

It is often useful to transform time series for analysis or forecasting. Many time series analysis and forecasting methods are most appropriate for time series with an unrestricted range, a linear trend, and a constant variance. Series that do not conform to these assumptions can often be transformed to series for which the methods are appropriate.

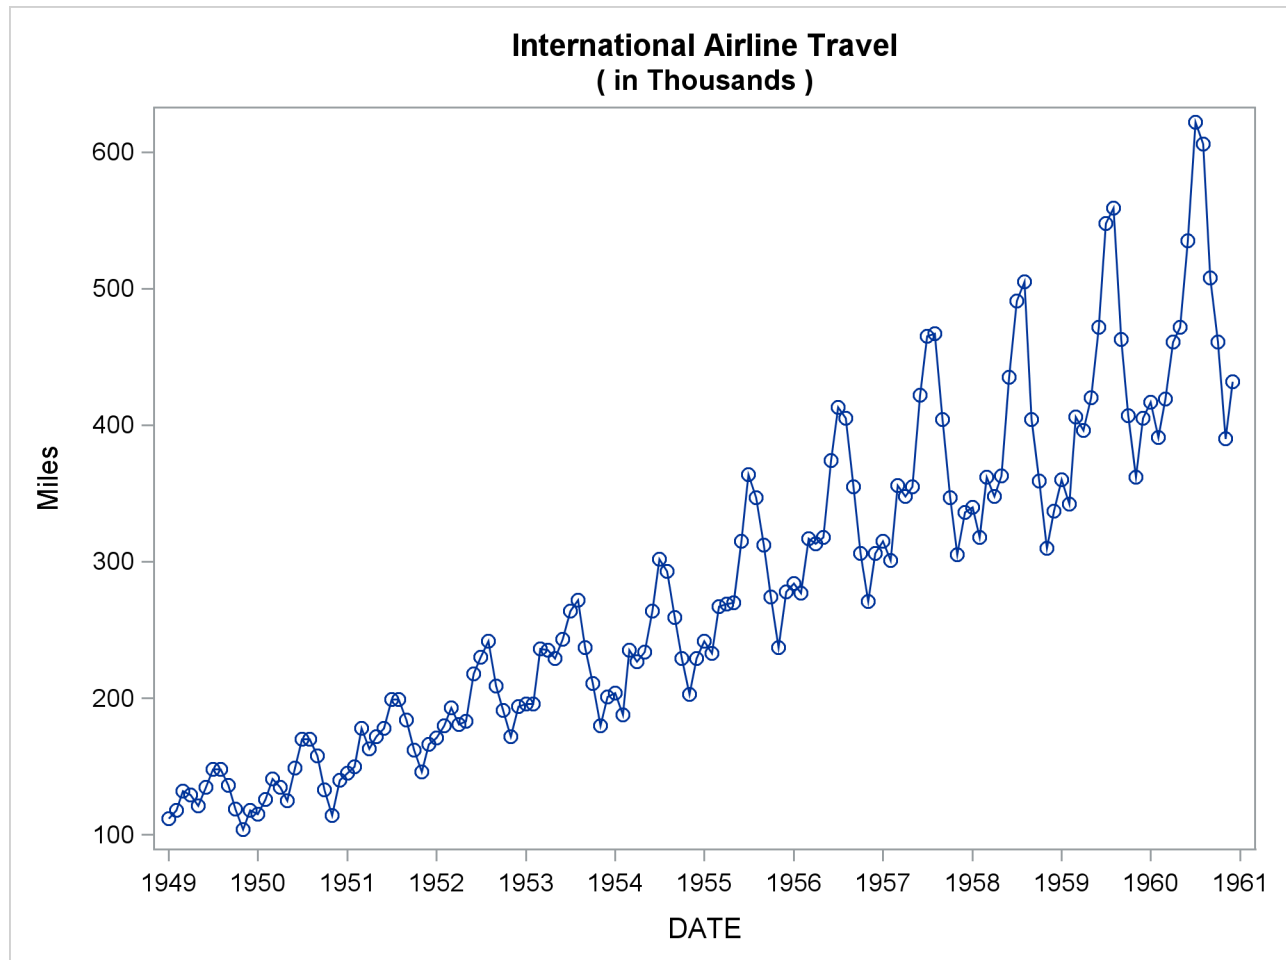
Transformations can be useful for the following:

- range restrictions. Many time series cannot have negative values or can be limited to a maximum possible value. You can often create a transformed series with an unbounded range.
- nonlinear trends. Many economic time series grow exponentially. Exponential growth corresponds to linear growth in the logarithms of the series.
- series variability that changes over time. Various transformations can be used to stabilize the variance.
- nonstationarity. The %DFTEST macro can be used to test a series for nonstationarity which can then be removed by differencing.

Log Transformation

The logarithmic transformation is often useful for series that must be greater than zero and that grow exponentially. For example, [Figure 3.17](#) shows a plot of an airline passenger miles series. Notice that the series has exponential growth and the variability of the series increases over time. Airline passenger miles must also be zero or greater.

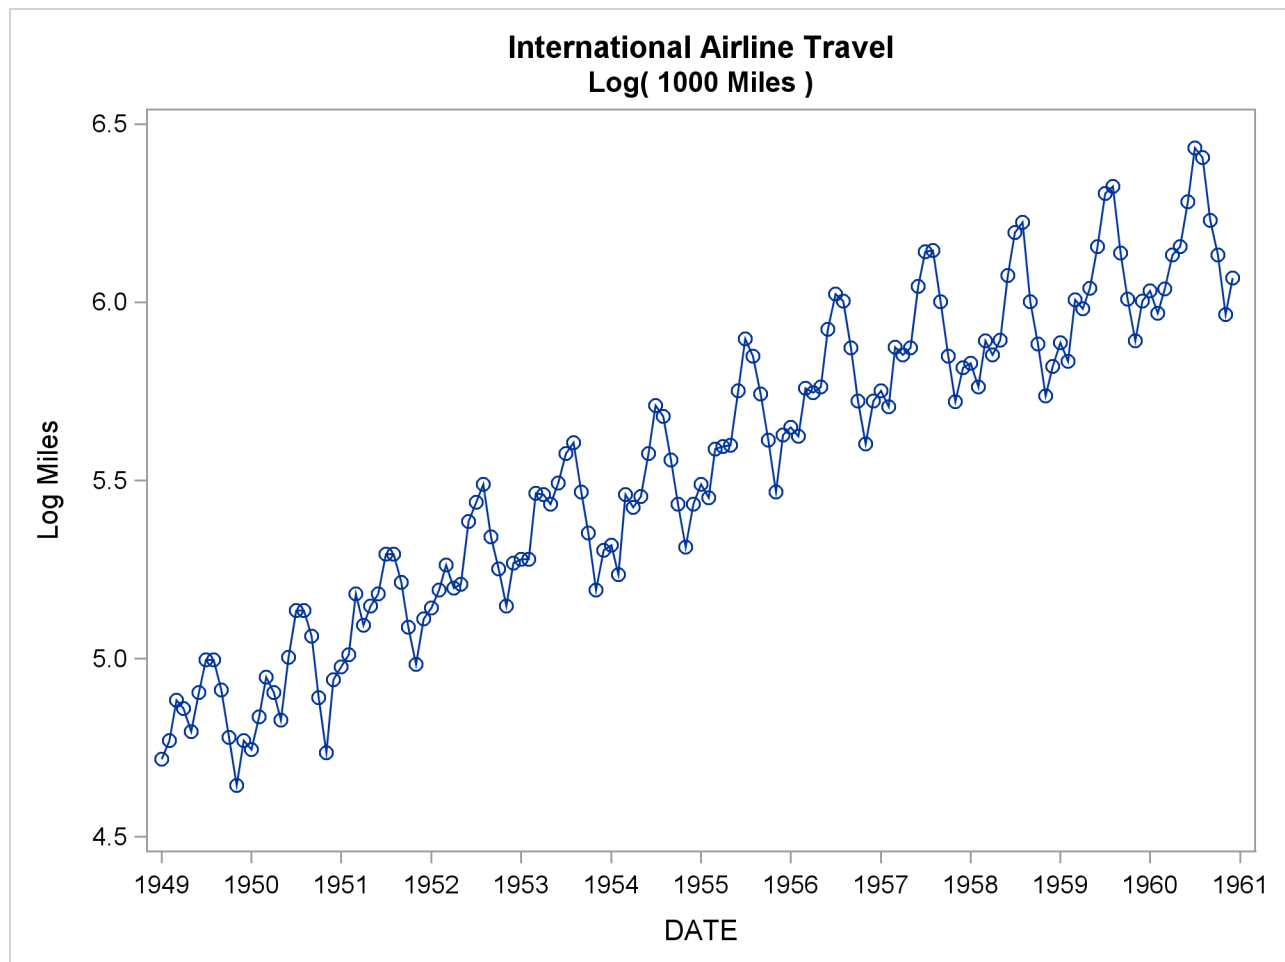
Figure 3.17 Airline Series



The following statements compute the logarithms of the airline series:

```
data lair;
  set sashelp.air;
  logair = log( air );
run;
```

[Figure 3.18](#) shows a plot of the log-transformed airline series. Notice that the log series has a linear trend and constant variance.

Figure 3.18 Log Airline Series

The %LOGTEST macro can help you decide if a log transformation is appropriate for a series. See Chapter 5, “SAS Macros and Functions,” for more information about the %LOGTEST macro.

Other Transformations

The Box-Cox transformation is a general class of transformations that includes the logarithm as a special case. The %BOXCOXAR macro can be used to find an optimal Box-Cox transformation for a time series. See Chapter 5 for more information about the %BOXCOXAR macro.

The logistic transformation is useful for variables with both an upper and a lower bound, such as market shares. The logistic transformation is useful for proportions, percent values, relative frequencies, or probabilities. The logistic function transforms values between 0 and 1 to values that can range from $-\infty$ to $+\infty$.

For example, the following statements transform the variable SHARE from percent values to an unbounded range:

```
data a;
  set a;
  lshare = log( share / ( 100 - share ) );
run;
```

Many other data transformation can be used. You can create virtually any desired data transformation using DATA step statements.

The EXPAND Procedure and Data Transformations

The EXPAND procedure provides a convenient way to transform series. For example, the following statements add variables for the logarithm of AIR and the logistic of SHARE to data set A:

```
proc expand data=a out=a method=none;
  convert air=logair / transform=( log );
  convert share=lshare / transform=( / 100 logit );
run;
```

See [Table 15.2](#) in Chapter 15, “The EXPAND Procedure,” for a complete list of transformations supported by PROC EXPAND.

Manipulating Time Series Data Sets

This section discusses merging, splitting, and transposing time series data sets and interpolating time series data to a higher or lower sampling frequency.

Splitting and Merging Data Sets

In some cases, you might want to separate several time series that are contained in one data set into different data sets. In other cases, you might want to combine time series from different data sets into one data set.

To split a time series data set into two or more data sets that contain subsets of the series, use a DATA step to create the new data sets and use the KEEP= data set option to control which series are included in each new data set. The following statements split the USPRICE data set shown in a previous example into two data sets, USCPI and USPPI:

```
data uscpi(keep=date cpi)
  usppi(keep=date ppi);
  set usprice;
run;
```

If the series have different time ranges, you can subset the time ranges of the output data sets accordingly. For example, if you know that CPI in USPRICE has the range August 1990 through the end of the data set, while PPI has the range from the beginning of the data set through June 1991, you could write the previous example as follows:

```
data uscpi(keep=date cpi)
    usppi(keep=date ppi);
set usprice;
if date >= '1aug1990'd then output uscpi;
if date <= '1jun1991'd then output usppi;
run;
```

To combine time series from different data sets into one data set, list the data sets to be combined in a MERGE statement and specify the dating variable in a BY statement. The following statements show how to combine the USCPI and USPPI data sets to produce the USPRICE data set. It is important to use the BY DATE statement so that observations are matched by time before merging.

```
data usprice;
    merge uscpi usppi;
    by date;
run;
```

Transposing Data Sets

The TRANSPOSE procedure is used to transpose data sets from one form to another. The TRANSPOSE procedure can transpose variables and observations, or transpose variables and observations within BY groups. This section discusses some applications of the TRANSPOSE procedure relevant to time series data sets. See the *Base SAS Procedures Guide* for more information about PROC TRANSPOSE.

Transposing from Interleaved to Standard Time Series Form

The following statements transpose part of the interleaved-form output data set FOREOUT, produced by PROC FORECAST in a previous example, to a standard form time series data set. To reduce the volume of output produced by the example, a WHERE statement is used to subset the input data set.

Observations with _TYPE_=ACTUAL are stored in the new variable ACTUAL; observations with _TYPE_=FORECAST are stored in the new variable FORECAST; and so forth. Note that the method used in this example works only for a single variable.

```
title "Original Data Set";
proc print data=foreout(obs=10);
    where date > '1may1991'd & date < '1oct1991'd;
run;

proc transpose data=foreout out=trans(drop=_name_);
    var cpi;
    id _type_;
```

```

by date;
where date > '1may1991'd & date < '1oct1991'd;
run;
title "Transposed Data Set";
proc print data=trans(obs=10);
run;

```

The TRANSPOSE procedure adds the variables `_NAME_` and `_LABEL_` to the output data set. These variables contain the names and labels of the variables that were transposed. In this example, there is only one transposed variable, so `_NAME_` has the value `CPI` for all observations. Thus, `_NAME_` and `_LABEL_` are of no interest and are dropped from the output data set by using the `DROP=` data set option. (If none of the variables transposed have a label, PROC TRANSPOSE does not output the `_LABEL_` variable and the `DROP=_LABEL_` option produces a warning message. You can ignore this message, or you can prevent the message by omitting `_LABEL_` from the `DROP=` list.)

The original and transposed data sets are shown in [Figure 3.19](#) and [Figure 3.20](#). (The observation numbers shown for the original data set reflect the operation of the WHERE statement.)

Figure 3.19 Original Data Sets

Original Data Set				
Obs	date	_TYPE_	_LEAD_	cpi
37	JUN1991	ACTUAL	0	136.000
38	JUN1991	FORECAST	0	136.146
39	JUN1991	RESIDUAL	0	-0.146
40	JUL1991	ACTUAL	0	136.200
41	JUL1991	FORECAST	0	136.566
42	JUL1991	RESIDUAL	0	-0.366
43	AUG1991	FORECAST	1	136.856
44	AUG1991	L95	1	135.723
45	AUG1991	U95	1	137.990
46	SEP1991	FORECAST	2	137.443

Figure 3.20 Transposed Data Sets

Transposed Data Set							
Obs	date	_LABEL_	ACTUAL	FORECAST	RESIDUAL	L95	U95
1	JUN1991	US Consumer Price Index	136.0	136.146	-0.14616	.	.
2	JUL1991	US Consumer Price Index	136.2	136.566	-0.36635	.	.
3	AUG1991	US Consumer Price Index	.	136.856	.	135.723	137.990
4	SEP1991	US Consumer Price Index	.	137.443	.	136.126	138.761

Transposing Cross-Sectional Dimensions

The following statements transpose the variable `CPI` in the `CPICITY` data set shown in a previous example from time series cross-sectional form to a standard form time series data set. (Only a subset of the data

shown in the previous example is used here.) Note that the method shown in this example works only for a single variable.

```

title "Original Data Set";
proc print data=cpicity;
run;

proc sort data=cpicity out=temp;
  by date city;
run;

proc transpose data=temp out=citycpi(drop=_name_);
  var cpi;
  id city;
  by date;
run;

title "Transposed Data Set";
proc print data=citycpi;
run;

```

The names of the variables in the transposed data sets are taken from the city names in the ID variable CITY. The original and the transposed data sets are shown in [Figure 3.21](#) and [Figure 3.22](#).

Figure 3.21 Original Data Sets

Original Data Set					
Obs	city	date	cpi	cpilag	
1	Chicago	JAN90	128.1	.	
2	Chicago	FEB90	129.2	128.1	
3	Chicago	MAR90	129.5	129.2	
4	Chicago	APR90	130.4	129.5	
5	Chicago	MAY90	130.4	130.4	
6	Chicago	JUN90	131.7	130.4	
7	Chicago	JUL90	132.0	131.7	
8	Los Angeles	JAN90	132.1	.	
9	Los Angeles	FEB90	133.6	132.1	
10	Los Angeles	MAR90	134.5	133.6	
11	Los Angeles	APR90	134.2	134.5	
12	Los Angeles	MAY90	134.6	134.2	
13	Los Angeles	JUN90	135.0	134.6	
14	Los Angeles	JUL90	135.6	135.0	
15	New York	JAN90	135.1	.	
16	New York	FEB90	135.3	135.1	
17	New York	MAR90	136.6	135.3	
18	New York	APR90	137.3	136.6	
19	New York	MAY90	137.2	137.3	
20	New York	JUN90	137.1	137.2	
21	New York	JUL90	138.4	137.1	

Figure 3.22 Transposed Data Sets

Transposed Data Set				
Obs	date	Chicago	Los_ Angeles	New_York
1	JAN90	128.1	132.1	135.1
2	FEB90	129.2	133.6	135.3
3	MAR90	129.5	134.5	136.6
4	APR90	130.4	134.2	137.3
5	MAY90	130.4	134.6	137.2
6	JUN90	131.7	135.0	137.1
7	JUL90	132.0	135.6	138.4

The following statements transpose the CITYCPI data set back to the original form of the CPICITY data set. The variable `_NAME_` is added to the data set to tell PROC TRANSPOSE the name of the variable in which to store the observations in the transposed data set. (If the `(DROP=_NAME_ _LABEL_)` option were omitted from the first PROC TRANSPOSE step, this would not be necessary. PROC TRANSPOSE assumes `ID _NAME_` by default.)

The `NAME=CITY` option in the PROC TRANSPOSE statement causes PROC TRANSPOSE to store the names of the transposed variables in the variable CITY. Because PROC TRANSPOSE recodes the values of the CITY variable to create valid SAS variable names in the transposed data set, the values of the variable CITY in the retransposed data set are not the same as in the original. The retransposed data set is shown in Figure 3.23.

```
data temp;
  set citycpi;
  _name_ = 'CPI';
run;

proc transpose data=temp out=retrans name=city;
  by date;
run;

proc sort data=retrans;
  by city date;
run;

title "Retransposed Data Set";
proc print data=retrans;
run;
```

Figure 3.23 Data Set Transposed Back to Original Form

Retransposed Data Set				
Obs	date	city	CPI	
1	JAN90	Chicago	128.1	
2	FEB90	Chicago	129.2	
3	MAR90	Chicago	129.5	
4	APR90	Chicago	130.4	
5	MAY90	Chicago	130.4	
6	JUN90	Chicago	131.7	
7	JUL90	Chicago	132.0	
8	JAN90	Los_Angeles	132.1	
9	FEB90	Los_Angeles	133.6	
10	MAR90	Los_Angeles	134.5	
11	APR90	Los_Angeles	134.2	
12	MAY90	Los_Angeles	134.6	
13	JUN90	Los_Angeles	135.0	
14	JUL90	Los_Angeles	135.6	
15	JAN90	New_York	135.1	
16	FEB90	New_York	135.3	
17	MAR90	New_York	136.6	
18	APR90	New_York	137.3	
19	MAY90	New_York	137.2	
20	JUN90	New_York	137.1	
21	JUL90	New_York	138.4	

Time Series Interpolation

The EXPAND procedure interpolates time series. This section provides a brief summary of the use of PROC EXPAND for different kinds of time series interpolation problems. Most of the issues discussed in this section are explained in greater detail in [Chapter 15](#).

By default, the EXPAND procedure performs interpolation by first fitting cubic spline curves to the available data and then computing needed interpolating values from the fitted spline curves. Other interpolation methods can be requested.

Note that interpolating values of a time series does not add any real information to the data because the interpolation process is not the same process that generated the other (nonmissing) values in the series. While time series interpolation can sometimes be useful, great care is needed in analyzing time series that contain interpolated values.

Interpolating Missing Values

To use the EXPAND procedure to interpolate missing values in a time series, specify the input and output data sets in the PROC EXPAND statement, and specify the time ID variable in an ID statement. For example, the following statements cause PROC EXPAND to interpolate values for missing values of all numeric variables in the data set USPRICE:

```
proc expand data=usprice out=interpl;
  id date;
run;
```

Interpolated values are computed only for embedded missing values in the input time series. Missing values before or after the range of a series are ignored by the EXPAND procedure.

In the preceding example, PROC EXPAND assumes that all series are measured at points in time given by the value of the ID variable. In fact, the series in the USPRICE data set are monthly averages. PROC EXPAND can produce a better interpolation if this is taken into account. The following example uses the FROM=MONTH option to tell PROC EXPAND that the series is monthly and uses the CONVERT statement with the OBSERVED=AVERAGE to specify that the series values are averages over each month:

```
proc expand data=usprice out=interpl
          from=month;
  id date;
  convert cpi ppi / observed=average;
run;
```

Interpolating to a Higher or Lower Frequency

You can use PROC EXPAND to interpolate values of time series at a higher or lower sampling frequency than the input time series. To change the periodicity of time series, specify the time interval of the input data set with the FROM= option, and specify the time interval for the desired output frequency with the TO= option. For example, the following statements compute interpolated weekly values of the monthly CPI and PPI series:

```
proc expand data=usprice out=interpl
          from=month to=week;
  id date;
  convert cpi ppi / observed=average;
run;
```

Interpolating between Stocks and Flows, Levels and Rates

A distinction is made between variables that are measured at points in time and variables that represent totals or averages over an interval. Point-in-time values are often called *stocks* or *levels*. Variables that represent totals or averages over an interval are often called *flows* or *rates*.

For example, the annual series Gross National Product represents the final goods production of over the year and also the yearly average rate of that production. However, the monthly variable Inventory represents the cost of a stock of goods at the end of the month.

The EXPAND procedure can convert between point-in-time values and period average or total values. To convert observation characteristics, specify the input and output characteristics with the OBSERVED= option in the CONVERT statement. For example, the following statements use the monthly average price index values in USPRICE to compute interpolated estimates of the price index levels at the midpoint of each month.

```
proc expand data=usprice out=midpoint
           from=month;
  id date;
  convert cpi ppi / observed=(average,middle);
run;
```

Reading Time Series Data

Time series data can be coded in many different ways. The SAS System can read time series data recorded in almost any form. Earlier sections of this chapter show how to read time series data coded in several commonly used ways. This section shows how to read time series data from data records coded in two other commonly used ways not previously introduced.

Several time series databases distributed by major data vendors can be read into SAS data sets by the DATASOURCE procedure. See Chapter 12, “[The DATASOURCE Procedure](#),” for more information.

The SASECRSP, SASEFAME, and SASEHAVR interface engines enable SAS users to access and process time series data in CRSPAccess data files, FAME databases, and Haver Analytics Data Link Express (DLX) data bases, respectively. See Chapter 38, “[The SASECRSP Interface Engine](#),” Chapter 40, “[The SASEFAME Interface Engine](#),” and Chapter 41, “[The SASEHAVR Interface Engine](#),” for more details.

Reading a Simple List of Values

Time series data can be coded as a simple list of values without dating information and with an arbitrary number of observations on each data record. In this case, the INPUT statement must use the trailing “@@” option to retain the current data record after reading the values for each observation, and the time ID variable must be generated with programming statements.

For example, the following statements read the USPRICE data set from data records that contain pairs of values for CPI and PPI. This example assumes you know that the first pair of values is for June 1990.

```
data usprice;
  input cpi ppi @@;
  date = intnx( 'month', '1jun1990'd, _n_-1 );
  format date monyy7.;
```

```

datalines;
129.9 114.3 130.4 114.5 131.6 116.5
132.7 118.4 133.5 120.8 133.8 120.1 133.8 118.7
134.6 119.0 134.8 117.2 135.0 116.2 135.2 116.0
135.6 116.5 136.0 116.3 136.2 116.0
;

```

Reading Fully Described Time Series in Transposed Form

Data for several time series can be coded with separate groups of records for each time series. Data files coded this way are transposed from the form required by SAS procedures. Time series data can also be coded with descriptive information about the series included with the data records.

The following example reads time series data for the USPRICE data set coded with separate groups of records for each series. The data records for each series consist of a series description record and one or more value records. The series description record gives the series name, starting month and year of the series, number of values in the series, and a series label. The value records contain the observations of the time series.

The data are first read into a temporary data set that contains one observation for each value of each series.

```

data temp;
  length _name_ $8 _label_ $40;
  keep _name_ _label_ date value;
  format date monyy.;
  input _name_ month year nval _label_ &;
  date = mdy( month, 1, year );
  do i = 1 to nval;
    input value @;
    output;
    date = intnx( 'month', date, 1 );
  end;
datalines;
cpi      8 90 12  Consumer Price Index
131.6 132.7 133.5 133.8 133.8 134.6 134.8 135.0
135.2 135.6 136.0 136.2
ppi      6 90 13  Producer Price Index
114.3 114.5 116.5 118.4 120.8 120.1 118.7 119.0
117.2 116.2 116.0 116.5 116.3
;

```

The following statements sort the data set by date and series name, and the TRANSPOSE procedure is used to transpose the data into a standard form time series data set.

```

proc sort data=temp;
  by date _name_;
run;

proc transpose data=temp out=usprice(drop=_name_);
  by date;

```

```

var value;
run;

proc contents data=usprice;
run;

proc print data=usprice;
run;

```

The final data set is shown in [Figure 3.25](#).

Figure 3.24 Contents of USPRICE Data Set

Retransposed Data Set					
The CONTENTS Procedure					
Alphabetic List of Variables and Attributes					
#	Variable	Type	Len	Format	Label
3	cpi	Num	8		Consumer Price Index
1	date	Num	8	MONYY.	
2	ppi	Num	8		Producer Price Index

Figure 3.25 Listing of USPRICE Data Set

Retransposed Data Set				
Obs	date	ppi	cpi	
1	JUN90	114.3	.	
2	JUL90	114.5	.	
3	AUG90	116.5	131.6	
4	SEP90	118.4	132.7	
5	OCT90	120.8	133.5	
6	NOV90	120.1	133.8	
7	DEC90	118.7	133.8	
8	JAN91	119.0	134.6	
9	FEB91	117.2	134.8	
10	MAR91	116.2	135.0	
11	APR91	116.0	135.2	
12	MAY91	116.5	135.6	
13	JUN91	116.3	136.0	
14	JUL91	.	136.2	

Chapter 4

Date Intervals, Formats, and Functions

Contents

Overview	125
Time Intervals	126
Constructing Interval Names	126
Shifted Intervals	127
Beginning Dates and Datetimes of Intervals	128
Summary of Interval Types	129
Examples of Interval Specifications	132
Custom Time Intervals	133
Date and Datetime Informats	138
Date, Time, and Datetime Formats	139
Date Formats	140
Datetime and Time Formats	144
Alignment of SAS Dates	144
SAS Date, Time, and Datetime Functions	145
References	151

Overview

This chapter summarizes the time intervals, date and datetime informats, date and datetime formats, and date, time, and datetime functions available in SAS software. The use of these features is explained in Chapter 3, “[Working with Time Series Data](#).” The material in this chapter is also contained in *SAS Language Reference: Concepts* and *SAS Language Reference: Dictionary*. Because these features are useful for work with time series data, documentation of these features is consolidated and repeated here for easy reference.

Time Intervals

This section provides a reference for the different kinds of time intervals supported by SAS software, but it does not cover how they are used. For an introduction to the use of time intervals, see Chapter 3, “[Working with Time Series Data](#).”

Some interval names are used with SAS date values, while other interval names are used with SAS datetime values. The interval names used with SAS date values are YEAR, SEMIYEAR, QTR, MONTH, SEMIMONTH, TENDAY, WEEK, WEEKDAY, DAY, YEARV, R445YR, R454YR, R544YR, R445QTR, R454QTR, R544QTR, R445MON, R454MON, R544MON, and WEEKV. The interval names used with SAS datetime or time values are HOUR, MINUTE, and SECOND. Various abbreviations of these names are also allowed, as described in the section “[Summary of Interval Types](#)” on page 129.

Interval names for use with SAS date values can be prefixed with ‘DT’ to construct interval names for use with SAS datetime values. The interval names DTYEAR, DTSEMIYEAR, DTQTR, DTMONTH, DTSEMIMONTH, DTTENDAY, DTWEEK, DTWEEKDAY, DTDAY, DTYEARV, DTR445YR, DTR454YR, DTR544YR, DTR445QTR, DTR454QTR, DTR544QTR, DTR445MON, DTR454MON, DTR544MON, and DTWEEKV are used with SAS datetime values.

Constructing Interval Names

Multipliers and shift indexes can be used with the basic interval names to construct more complex interval specifications. The general form of an interval name is as follows:

*NAME**n.s*

The three parts of the interval name are shown below:

<i>NAME</i>	the name of the basic interval type. For example, YEAR specifies yearly intervals.
<i>n</i>	an optional multiplier that specifies that the interval is a multiple of the period of the basic interval type. For example, the interval YEAR2 consists of two-year (biennial) periods.
<i>s</i>	an optional starting subperiod index that specifies that the intervals are shifted to later starting points. For example, YEAR.3 specifies yearly periods shifted to start on the first of March of each calendar year and to end in February of the following year.

Both the multiplier *n* and the shift index *s* are optional and default to 1. For example, YEAR, YEAR1, YEAR.1, and YEAR1.1 are all equivalent ways of specifying ordinary calendar years.

To test for a valid interval specification, use the INTTEST function:

```
interval = 'MONTH3.2';
valid = INTTEST( interval );
valid = INTTEST( 'YEAR4');
```

INTTEST returns a value of 0 if the argument is not a valid interval specification and 1 if the argument is a valid interval specification. The INTTEST function can also be used in a DATA step to test an interval before calling an interval function:

```
valid = INTTEST( interval );
if ( valid = 1 ) then do;
    end_date = INTNX( interval, date, 0, 'E' );
    Status = 'Success';
end;
if ( valid = 0 ) then Status = 'Failure';
```

For more information about the INTTEST function, see the *SAS Language Reference: Dictionary*.

Shifted Intervals

Different kinds of intervals are shifted by different subperiods:

- YEAR, SEMIYEAR, QTR, and MONTH intervals are shifted by calendar months.
- WEEK and DAY intervals are shifted by days.
- SEMIMONTH intervals are shifted by semimonthly periods.
- TENDAY intervals are shifted by 10-day periods.
- YEARV intervals are shifted by WEEKV intervals.
- R445YR, R445QTR, and R445MON intervals are shifted by R445MON intervals.
- R454YR, R454QTR, and R454MON intervals are shifted by R454MON intervals.
- R544YR, R544QTR, and R544MON intervals are shifted by R544MON intervals.
- WEEKV intervals are shifted by days.
- WEEKDAY intervals are shifted by weekdays.
- HOUR intervals are shifted by hours.
- MINUTE intervals are shifted by minutes.
- SECOND intervals are shifted by seconds.

The INTSHIFT function returns the shift interval:

```
interval = 'MONTH3.2';
shift_interval = INTSHIFT( interval );
```

In this example, the value of shift_interval is 'MONTH'. For more information about the INTSHIFT function, see the *SAS Language Reference: Dictionary*.

If a subperiod is specified, the shift index cannot be greater than the number of subperiods in the whole interval. For example, you can use YEAR2.24, but YEAR2.25 is an error because there is no 25th month in a two-year interval.

For interval types that shift by subperiods that are the same as the basic interval type, only multiperiod intervals can be shifted. For example, MONTH type intervals shift by MONTH subintervals; thus, monthly intervals cannot be shifted because there is only one month in MONTH. However, bimonthly intervals can be shifted because there are two MONTH intervals in each MONTH2 interval. The interval name MONTH2.2 specifies bimonthly periods that start on the first day of even-numbered months.

Beginning Dates and Datetimes of Intervals

Intervals that represent divisions of a year begin with the start of the year (1 January). YEARV, R445YR, R454YR, and R544YR intervals begin with the first week of the International Organization for Standardization (ISO) year, the Monday on or immediately preceding January 4th. R445QTR, R454QTR, and R544QTR intervals begin with the 1st, 14th, 27th, and 40th weeks of the ISO year. MONTH2 periods begin with odd-numbered months (January, March, May, and so on).

Likewise, intervals that represent divisions of a day begin with the start of the day (midnight). Thus, HOUR8.7 intervals divide the day into the periods 06:00 to 14:00, 14:00 to 22:00, and 22:00 to 06:00.

Intervals that do not nest within years or days begin relative to the SAS date or datetime value 0. The arbitrary reference time of midnight on January 1, 1960, is used as the origin for nonshifted intervals, and shifted intervals are defined relative to that reference point. For example, MONTH13 defines the intervals January 1, 1960, February 1, 1961, March 1, 1962, and so forth, and the intervals December 1, 1959, November 1, 1958, and so on before the base date January 1, 1960.

Similarly, the WEEK2 interval begins relative to the Sunday of the week of January 1, 1960. The interval specification WEEK6.13 defines six-week periods that start on second Fridays, and the convention of counting relative to the period that contains January 1, 1960, indicates the starting date or datetime of the interval closest to January 1, 1960, that corresponds to the second Fridays of six-week intervals.

Intervals always begin on the date or datetime defined by the base interval name, the multiplier, and the shift value. The end of the interval immediately precedes the beginning of the next interval. However, an interval can be identified by any date or datetime value between its starting and ending values, inclusive. See the section “[Alignment of SAS Dates](#)” on page 144 for more information about generating identifying dates for intervals.

Summary of Interval Types

The interval types are summarized as follows:

YEAR

specifies yearly intervals. Abbreviations are YEAR, YEARS, YEARLY, YR, ANNUAL, ANNUALLY, and ANNUALS. The starting subperiod s is in months ([MONTH](#)).

YEARV

specifies ISO 8601 yearly intervals. The ISO 8601 year starts on the Monday on or immediately preceding January 4th. Note that it is possible for the ISO 8601 year to start in December of the preceding year. Also, some ISO 8601 years contain a leap week. For further discussion of ISO weeks, see Technical Committee ISO/TC 154, Documents in Commerce, and Administration (2004). The starting subperiod s is in ISO 8601 weeks ([WEEKV](#)).

R445YR

is the same as YEARV except that the starting subperiod s is in retail 4-4-5 months ([R445MON](#)).

R454YR

is the same as YEARV except that the starting subperiod s is in retail 4-5-4 months ([R454MON](#)). For a discussion of the retail 4-5-4 calendar, see National Retail Federation (2007).

R544YR

is the same as YEARV except that the starting subperiod s is in retail 5-4-4 months ([R544MON](#)).

SEMIYEAR

specifies semiannual intervals (every six months). Abbreviations are SEMIYEAR, SEMIYEARS, SEMIYEARLY, SEMIYR, SEMIANNUAL, and SEMIANN.

The starting subperiod s is in months ([MONTH](#)). For example, SEMIYEAR.3 intervals are March–August and September–February.

QTR

specifies quarterly intervals (every three months). Abbreviations are QTR, QUARTER, QUARTERS, QUARTERLY, QTRLY, and QTRS. The starting subperiod s is in months ([MONTH](#)).

R445QTR

specifies retail 4-4-5 quarterly intervals (every 13 ISO 8601 weeks). Some fourth quarters contain a leap week. The starting subperiod s is in retail 4-4-5 months ([R445MON](#)).

R454QTR

specifies retail 4-5-4 quarterly intervals (every 13 ISO 8601 weeks). Some fourth quarters contain a leap week. For a discussion of the retail 4-5-4 calendar, see National Retail Federation (2007). The starting subperiod s is in retail 4-5-4 months ([R454MON](#)).

R544QTR

specifies retail 5-4-4 quarterly intervals (every 13 ISO 8601 weeks). Some fourth quarters contain a leap week. The starting subperiod s is in retail 5-4-4 months ([R544MON](#)).

MONTH

specifies monthly intervals. Abbreviations are MONTH, MONTHS, MONTHLY, and MON. The starting subperiod *s* is in months (MONTH). For example, MONTH2.2 intervals are February–March, April–May, June–July, August–September, October–November, and December–January of the following year.

R445MON

specifies retail 4-4-5 monthly intervals. The 3rd, 6th, 9th, and 12th months are five ISO 8601 weeks long with the exception that some 12th months contain leap weeks. All other months are four ISO 8601 weeks long. R445MON intervals begin with the 1st, 5th, 9th, 14th, 18th, 22nd, 27th, 31st, 35th, 40th, 44th, and 48th weeks of the ISO year. The starting subperiod *s* is in retail 4-4-5 months (R445MON).

R454MON

specifies retail 4-5-4 monthly intervals. The 2nd, 5th, 8th, and 11th months are five ISO 8601 weeks long. All other months are four ISO 8601 weeks long with the exception that some 12th months contain leap weeks. R454MON intervals begin with the 1st, 5th, 10th, 14th, 18th, 23rd, 27th, 31st, 36th, 40th, 44th, and 49th weeks of the ISO year. For a discussion of the retail 4-5-4 calendar, see National Retail Federation (2007). The starting subperiod *s* is in retail 4-5-4 months (R454MON).

R544MON

specifies retail 5-4-4 monthly intervals. The 1st, 4th, 7th, and 10th months are five ISO 8601 weeks long. All other months are four ISO 8601 weeks long with the exception that some 12th months contain leap weeks. R544MON intervals begin with the 1st, 6th, 10th, 14th, 19th, 23rd, 27th, 32nd, 36th, 40th, 45th, and 49th weeks of the ISO year. The starting subperiod *s* is in retail 5-4-4 months (R544MON).

SEMIMONTH

specifies semimonthly intervals. SEMIMONTH breaks each month into two periods, starting on the 1st and 16th days. Abbreviations are SEMIMONTH, SEMIMONTHS, SEMIMONTHLY, and SEMIMON. The starting subperiod *s* is in SEMIMONTH periods. For example, SEMIMONTH2.2 specifies intervals from the 16th of one month through the 15th of the next month.

TENDAY

specifies 10-day intervals. TENDAY breaks the month into three periods, the 1st through the 10th day of the month, the 11th through the 20th day of the month, and the remainder of the month. (TENDAY is a special interval typically used for reporting automobile sales data.) The starting subperiod *s* is in TENDAY periods. For example, TENDAY4.2 defines 40-day periods that start at the second TENDAY period.

WEEK

specifies weekly intervals of seven days. Abbreviations are WEEK, WEEKS, and WEEKLY. The starting subperiod *s* is in days (DAY), with the days of the week numbered as 1=Sunday, 2=Monday, 3=Tuesday, 4=Wednesday, 5=Thursday, 6=Friday, and 7=Saturday. For example, WEEK.7 means weekly with Saturday as the first day of the week.

WEEKV

specifies ISO 8601 weekly intervals of seven days. Each week starts on Monday. The starting subperiod s is in days (**DAY**). Note that WEEKV differs from WEEK in that WEEKV.1 starts on Monday, WEEKV.2 starts on Tuesday, and so forth.

WEEKDAY**WEEKDAY dW** **WEEKDAY ddW** **WEEKDAY $dddW$**

specifies daily intervals with weekend days included in the preceding weekday. Note that for a five-day work week that starts on Monday, the appropriate interval is WEEKDAY5.2. Abbreviations are WEEKDAY and WEEKDAYS. The starting subperiod s is in weekdays (WEEKDAY).

The WEEKDAY interval is the same as DAY except that weekend days are absorbed into the preceding weekday. Thus, there are five WEEKDAY intervals in a calendar week: Monday, Tuesday, Wednesday, Thursday, and the three-day period Friday-Saturday-Sunday.

The default weekend days are Saturday and Sunday, but any one to six weekend days can be listed after the WEEKDAY string and followed by a W. Weekend days are specified as '1' for Sunday, '2' for Monday, and so forth. For example, WEEKDAY67W specifies a Friday-Saturday weekend. WEEKDAY1W specifies a six-day work week with a Sunday weekend. WEEKDAY17W is the same as WEEKDAY.

DAY

specifies daily intervals. Abbreviations are DAY, DAYS, and DAILY. The starting subperiod s is in days (DAY).

HOURL

specifies hourly intervals. Aliases are HOUR, DTHOUR, HOURS, DTHOURS, HOURLY, DTHOURLY, HR, and DTHR. The starting subperiod s is in hours (HOUR).

MINUTE

specifies minute intervals. Aliases are MINUTE, DTMINUTE, MINUTES, DTMINUTES, MIN, and DTMIN. The starting subperiod s is in minutes (MINUTE).

SECOND

specifies second intervals. Aliases are SECOND, DTSECOND, SECONDS, DTSECONDS, SEC and DTSEC. The starting subperiod s is in seconds (SECOND).

Examples of Interval Specifications

Table 4.1 shows examples of different kinds of interval specifications.

Table 4.1 Examples of Intervals

Name	Description of Interval
YEAR	Years that start in January
YEAR.10	Years that start in October
YEAR2.7	Biennial intervals that start in July of even years
YEAR2.19	Biennial intervals that start in July of odd years
YEAR4.11	Four-year intervals that start in November of leap years (frequency of U.S. presidential elections)
YEAR4.35	Four-year intervals that start in November of even years between leap years (frequency of U.S. midterm elections)
YEARV	Years that start on the Monday on or immediately preceding January 4th
YEARV.2	Years that start on the Monday immediately following January 4th
R445MON	Months that start on the 1st, 5th, 9th, 14th, 18th, 22nd, 27th, 31st, 35th, 40th, 44th, and 48th Monday of the year. The 1st Monday is the Monday on or immediately preceding January 4th
R445MON3	Three-month intervals that start on the 1st, 14th, 27th, and 40th Monday of the year. This is equivalent to R445QTR
R445MON3.2	Three-month intervals that start on the 5th, 18th, 31st, and 44th Monday of the year. This is equivalent to R445QTR.2
WEEK	Weekly intervals that start on Sundays
WEEK2	Biweekly intervals that start on first Sundays
WEEK1.1	Same as WEEK
WEEK.2	Weekly intervals that start on Mondays
WEEK6.3	Six-week intervals that start on first Tuesdays
WEEK6.11	Six-week intervals that start on second Wednesdays
WEEKDAY	Daily with Friday-Saturday-Sunday counted as the same day (five-day work week with a Saturday-Sunday weekend)
WEEKDAY17W	Same as WEEKDAY
WEEKDAY5.2	Five weekdays that start on Monday. If WEEKDAY data are accumulated into weekly data, the interval of the accumulated data is WEEKDAY5.2
WEEKDAY67W	Daily with Thursday-Friday-Saturday counted as the same day (five-day work week with a Friday-Saturday weekend)
WEEKDAY1W	Daily with Saturday-Sunday counted as the same day (six-day work week with a Sunday weekend)
WEEKDAY3.2	Three-weekday intervals (with Friday-Saturday-Sunday counted as one weekday) with the cycle three-weekday periods aligned to Monday, January 4, 1960
HOUR8.7	Eight-hour intervals that start at 6 a.m., 2 p.m., and 10 p.m. (might be used for work shifts)

Custom Time Intervals

The standard time intervals described in the previous sections do not always fit the data. For example, you might want to use fiscal months that begin on the 10th of each month, but the MONTH interval begins on the 1st of each month. Or you might collect data hourly for a business that is closed at night, but using the DTHOUR interval results in gaps in the data that can cause problems in standard time series analysis. In another case, you might wish to calculate the number of business days between dates, excluding holidays and weekends, but holidays are counted when you use the INTCK function with the WEEKDAY interval. For more information about the INTCK function, see “Interval Functions INTNX and INTCK” on page 96.

Time series can be analyzed using observation numbers as the identifying reference. However, it is often desirable to maintain the time stamp for other types of modeling such as regression variables based on time or reconciliation.

To address these issues, you can define custom intervals within a given SAS program. The use of custom intervals requires the following two steps for each interval:

- 1 Associate a data set name with a custom interval name by using the INTERVALDS= system option. For more information about the INTERVALDS= option, see the *SAS Language Reference: Dictionary*. The following example associates the data set StoreHoursDS with the custom interval StoreHours.

```
options intervalds=(StoreHours=StoreHoursDS);
```

- 2 Create a data set that describes the custom interval. The data set must contain a BEGIN variable. It can also contain an END and a SEASON variable. It should contain a FORMAT statement for the BEGIN variable that specifies a SAS date, SAS datetime, or numeric format that matches the BEGIN variable data. If the END variable is present, it should also be included in the FORMAT statement. A numeric format that is not a SAS date or SAS datetime format indicates that the values are observation numbers. If the END variable is not present, then the implied value of END at each observation is one less than the value of BEGIN at the next observation.

The span of the custom interval data set should include any dates or times that are necessary for performing calculations on the time series, including backcasting, forecasting, and other operations that might extend beyond the series (such as filters).

After the two preceding steps have been completed, the custom interval can be specified in SAS procedures and functions where a standard time interval can be specified.

The following DATA step creates the StoreHoursDS data set, which is appropriate for a business that is open 9AM to 6PM Monday through Friday and Saturday 9AM to 1PM:

```
options intervals=(StoreHours=StoreHoursDS);
data StoreHoursDS(keep=BEGIN END);
  start = '01JAN2009'D;
  stop  = '31DEC2009'D;
  do date = start to stop;
    dow = WEEKDAY(date);
    datetime=dhms(date,0,0,0);
    if dow not in (1,7) then
      do hour = 9 to 17;
        begin=intnx('hour',datetime,hour,'b');
        end=intnx('hour',datetime,hour,'e');
        output;
      end;
    else if dow = 7 then
      do hour = 9 to 12;
        begin=intnx('hour',datetime,hour,'b');
        end=intnx('hour',datetime,hour,'e');
        output;
      end;
    end;
  format BEGIN END DATETIME.;
run;

title 'Store Hours Custom Interval';
proc print data=StoreHoursDS(obs=18);
run;
```

The first 18 observations of the custom interval data set are shown in [Figure 4.1](#).

Figure 4.1 Store Hours Custom Interval

Store Hours Custom Interval			
Obs	begin	end	
1	01JAN09:09:00:00	01JAN09:09:59:59	
2	01JAN09:10:00:00	01JAN09:10:59:59	
3	01JAN09:11:00:00	01JAN09:11:59:59	
4	01JAN09:12:00:00	01JAN09:12:59:59	
5	01JAN09:13:00:00	01JAN09:13:59:59	
6	01JAN09:14:00:00	01JAN09:14:59:59	
7	01JAN09:15:00:00	01JAN09:15:59:59	
8	01JAN09:16:00:00	01JAN09:16:59:59	
9	01JAN09:17:00:00	01JAN09:17:59:59	
10	02JAN09:09:00:00	02JAN09:09:59:59	
11	02JAN09:10:00:00	02JAN09:10:59:59	
12	02JAN09:11:00:00	02JAN09:11:59:59	
13	02JAN09:12:00:00	02JAN09:12:59:59	
14	02JAN09:13:00:00	02JAN09:13:59:59	
15	02JAN09:14:00:00	02JAN09:14:59:59	
16	02JAN09:15:00:00	02JAN09:15:59:59	
17	02JAN09:16:00:00	02JAN09:16:59:59	
18	02JAN09:17:00:00	02JAN09:17:59:59	

The following DATA step creates the FMDS data set to define a custom interval FiscalMonth, which is appropriate for a business that uses fiscal months that start on the 10th of each month. The SAME alignment option of the INTNX function specifies that the dates generated by the INTNX function are the same day of the month as the date in the start variable. For more information about the INTNX function, see “[SAS Date, Time, and Datetime Functions](#)” on page 145. The MONTH function assigns the month of the BEGIN variable to the SEASON variable. This specifies monthly seasonality.

```
options intervals=(FiscalMonth=FMDS);
data FMDS(keep=BEGIN SEASON);
  start = '10JAN1999'D;
  stop  = '10JAN2001'D;
  nmonths = INTCK('MONTH',start,stop);
  do i=0 to nmonths;
    BEGIN = INTNX('MONTH',start,i,'S');
    SEASON = MONTH(BEGIN);
    output;
  end;
  format BEGIN DATE.;
run;
```

The difference between the custom FiscalMonth interval and a standard interval can be seen in the following example. The output shown in [Figure 4.2](#) compares how the data are accumulated. For the FiscalMonth interval, values in the first nine days of the month are accumulated with the interval that begins in the previous month. For the standard MONTH interval, values in the first nine days of the month are accumulated with the calendar month.

```
data sales(keep=DATE sales);
  do date = '01JAN2000'D to '31DEC2000'D;
    month = MONTH(date);
    dayofmonth = DAY(date);
    sales = 0;
    if ( dayofmonth lt 10 ) then sales = month/9;
    output;
  end;
  format date monyy.;
run;

proc timeseries data=sales out=dataInFiscalMonths;
  id DATE interval=FiscalMonth accumulate=total;
  var sales;
run;

proc timeseries data=sales out=dataInStdMonths;
  id DATE interval=Month accumulate=total;
  var sales;
run;

data compare;
  merge dataInFiscalMonths(rename=(sales=FM_sales))
        dataInStdMonths(rename=(sales=SM_sales));
  by DATE;
run;
```

```

title 'Standard Monthly Data vs. Fiscal Month Data';
proc print data=compare;
run;

```

Figure 4.2 Fiscal Months Custom Interval

Standard Monthly Data vs. Fiscal Month Data				
Obs	date	FM_sales	SM_sales	
1	10-DEC-1999	1	.	
2	01-JAN-2000	.	1	
3	10-JAN-2000	2	.	
4	01-FEB-2000	.	2	
5	10-FEB-2000	3	.	
6	01-MAR-2000	.	3	
7	10-MAR-2000	4	.	
8	01-APR-2000	.	4	
9	10-APR-2000	5	.	
10	01-MAY-2000	.	5	
11	10-MAY-2000	6	.	
12	01-JUN-2000	.	6	
13	10-JUN-2000	7	.	
14	01-JUL-2000	.	7	
15	10-JUL-2000	8	.	
16	01-AUG-2000	.	8	
17	10-AUG-2000	9	.	
18	01-SEP-2000	.	9	
19	10-SEP-2000	10	.	
20	01-OCT-2000	.	10	
21	10-OCT-2000	11	.	
22	01-NOV-2000	.	11	
23	10-NOV-2000	12	.	
24	01-DEC-2000	.	12	
25	10-DEC-2000	0	.	

The next example uses custom intervals in the time function INTCK to omit holidays when counting business days. The result is shown in [Figure 4.3](#).

```
options intervals=(BankingDays=BankDayDS);
data BankDayDS (keep=BEGIN);
  start = '15DEC1998'D;
  stop  = '15JAN2002'D;
  nwkdays = INTCK('WEEKDAY',start,stop);
  do i = 0 to nwkdays;
    BEGIN = INTNX('WEEKDAY',start,i);
    year = YEAR(BEGIN);
    if BEGIN ne HOLIDAY("NEWYEAR",year) and
       BEGIN ne HOLIDAY("MLK",year) and
       BEGIN ne HOLIDAY("USPRESIDENTS",year) and
       BEGIN ne HOLIDAY("MEMORIAL",year) and
       BEGIN ne HOLIDAY("USINDEPENDENCE",year) and
       BEGIN ne HOLIDAY("LABOR",year) and
       BEGIN ne HOLIDAY("COLUMBUS",year) and
       BEGIN ne HOLIDAY("VETERANS",year) and
       BEGIN ne HOLIDAY("THANKSGIVING",year) and
       BEGIN ne HOLIDAY("CHRISTMAS",year) then
      output;
    end;
    format BEGIN DATE.;
  run;

data CountDays;
  start = '01JAN1999'D;
  stop  = '31DEC2001'D;
  ActualDays = INTCK('DAYS',start,stop);
  Weekdays  = INTCK('WEEKDAYS',start,stop);
  BankDays    = INTCK('BankingDays',start,stop);
  format start stop DATE.;
run;

title 'Methods of Counting Days';
proc print data=CountDays;
run;
```

Figure 4.3 Bank Days Custom Interval

Methods of Counting Days						
Obs	start	stop	Actual Days	Weekdays	Bank Days	
1	01JAN99	31DEC01	1095	781	757	

Date and Datetime Informats

Table 4.2 lists some of the SAS date and datetime informats available to read date, time, and datetime values. See Chapter 3, “Working with Time Series Data,” for a discussion of the use of date and datetime informats. See *SAS Language Reference: Concepts* for a complete description of these informats.

For each informat, Table 4.2 shows an example of a date or datetime value written in the style that the informat is designed to read. You can specify the width of each informat by adding *w*. For informats that include second values, you can specify the number of decimal digits for seconds by adding *d*. Table 4.2 shows the width range allowed by the informat and the default width. The date 17 October 1991 and the time 2:25:32 p.m. are used for the example in all cases.

Table 4.2 Frequently Used SAS Date and Datetime Informats

Informat and Example	Description	Width Range	Default Width
ANYDTDTE _w	Reads and extracts the date value from any of the following: DATE, DATETIME, DDM-MYY, JULIAN, MDYAMPM, MMDDYY, MMxYY*, MONYY, TIME, YMDDTTM, YYMMDD, YYQ, YYxMM*, month-day-year	5–32	9
ANYDTDTM _w	Reads and extracts the datetime value from any of the following: DATE, DATETIME, DDM-MYY, JULIAN, MMDDYY, MMxYY*, MONYY, TIME, YYMMDD, YYQ, YYxMM*, month-day-year	1–32	19
ANYDTTME _w	Reads and extracts the time value from any of the following: DATE, DATETIME, DDM-MYY, JULIAN, MMDDYY, MONYY, TIME, YYMMDD, YYQ, month-day-year	1–32	8
DATE _w 17oct91	Day, month abbreviation, and year: <i>ddmonyy</i>	7–32	7
DATETIME _{w.d} 17oct91:14:45:32	Date and time: <i>ddmonyy:hh:mm:ss</i>	13–40	18
DDMMYY _w 17/10/91	Day, month, year: <i>ddmmyy</i> , <i>dd/mm/yy</i> , <i>dd-mm-yy</i> , or <i>dd mm yy</i>	6–32	6

Table 4.2 *continued*

Informant and Example	Description	Width Range	Default Width
JULIAN _w . 91290	Year and day of year (Julian dates): <i>yyddd</i>	5–32	5
MMDDYY _w . 10/17/91	Month, day, year: <i>mmdyy</i> , <i>mm/dd/yy</i> , <i>mm-dd-yy</i> , or <i>mm dd yy</i>	6–32	6
MONYY _w . Oct91	Month abbreviation and year: <i>monyy</i>	5–32	5
NENGOW. H.03/10/17	Japanese Nengo notation	7–32	10
TIME _{w.d} 14:45:32	Hours, minutes, seconds: <i>hh:mm:ss</i> or hours, minutes: <i>hh:mm</i>	5–32	8
WEEKV _w . 1991-W42-04	ISO 8601 year, week, day of week: <i>yyyy-Www-dd</i>	3–200	11
YYMMDD _w . 91/10/17	Year, month, day: <i>yymmdd</i> , <i>yy/mm/dd</i> , <i>yy-mm-dd</i> , or <i>yy mm dd</i>	6–32	6
YYQ _w . 91Q4	Year and quarter of year: <i>yyQq</i>	4–32	4

Date, Time, and Datetime Formats

Some of the commonly used SAS date and datetime formats are listed in [Table 4.3](#) and [Table 4.4](#). You can specify the width value for each format by adding *w*. The tables list the range of width values allowed and the default width value for each format.

The notation used by a format is abbreviated in different ways depending on the width option used. For example, the format MMDDYY8. writes the date 17 October 1991 as 10/17/91, while the format MMD-DYY6. writes this date as 101791. In particular, formats that display the year show two-digit or four-digit year values depending on the width option. The examples shown in the tables use the default width.

The interval function INTFMT returns a recommended format for time ID values based on the interval that describes the frequency of the values. The following example uses INTFMT to select a format to display the quarterly time ID variable *qtrDate*. In this example, INTFMT returns the format YYQC6., which displays the year in four digits and the quarter in a single digit. This selected format is stored in a macro variable that is created by the CALL SYMPUT statement. The second argument to INTFMT controls the width of the year for date formats; it can take the value ‘long’ or ‘l’ to indicate 4 for the year width or the value

‘short’ or ‘s’ to indicate 2 for the year width. For more information about the INTFMT function, see the *SAS Language Reference: Dictionary*. For more information about the CALL SYMPUT statement, see the *SAS Language Reference: Dictionary*.

The macro variable &FMT is then used in the FORMAT statement in the PROC PRINT step as follows:

```
data b(keep=qtrDate);
  interval = 'QTR';
  form = INTFMT( interval, 'long' );
  call symput('fmt',form);
  do i=1 to 4;
    qtrDate = INTNX( interval, '01jan00'd, i-1 );
    output;
  end;
run;

proc print;
  format qtrDate &fmt;
run;
```

See *SAS Language Reference: Concepts* for a complete description of these formats, including the variations of the formats produced by different width options. See Chapter 3, “[Working with Time Series Data](#),” for a discussion of the use of date and datetime formats.

Date Formats

Table 4.3 lists some of the available SAS date formats. For each format, an example is shown of a date value in the notation produced by the format. The date ‘17OCT91’D is used as the example.

Table 4.3 Frequently Used SAS Date Formats

Format and Example	Description	Width Range	Default Width
DATE _w . 17OCT91	Day, month abbreviation, year: <i>ddmonyy</i>	5–9	7
DAY _w . 17	Day of month	2–32	2
DDMMYY _w . 17/10/91	Day, month, year: <i>dd/mm/yy</i>	2–8	8
DOWNAME _w . Thursday	Name of day of the week	1–32	9
JULDAY _w . 290	Day of year	3–32	3

Table 4.3 *continued*

Format and Example	Description	Width Range	Default Width
JULIAN _w . 91290	Year and day of year: <i>yyddd</i>	5–7	5
MMDDYY _w . 10/17/91	Month, day, year: <i>mm/dd/yy</i>	2–8	8
MMYY _w . 10M1991	Month and year: <i>mmMyyyy</i>	5–32	7
MMYYC _w . 10:1991	Month and year: <i>mm:yyyy</i>	5–32	7
MMYYD _w . 10-1991	Month and year: <i>mm-yyyy</i>	5–32	7
MMYYP _w . 10.1991	Month and year: <i>mm.yyyy</i>	5–32	7
MMYYs _w . 10/1991	Month and year: <i>mm/yyyy</i>	5–32	7
MMYYN _w . 101991	Month and year: <i>mmyyyy</i>	5–32	6
MONNAME _w . October	Name of month	1–32	9
MONTH _w . 10	Month of year	1–32	2
MONYY _w . OCT91	Month abbreviation and year: <i>monyy</i>	5–7	5
QTR _w . 4	Quarter of year	1–32	1
QTRR _w . IV	Quarter in roman numerals	3–32	3
NENGO _w . H.03/10/17	Japanese Nengo notation	2–10	10

Table 4.3 *continued*

Format and Example	Description	Width Range	Default Width
WEEKDATE _w . Thursday, October 17, 1991	<i>day-of-week, month-name dd, yyyy</i>	3–37	29
WEEKDATX _w . Thursday, 17 October 1991	<i>day-of-week, dd month-name yyyy</i>	3–37	29
WEEKDAY _w . 5	Day of week	1–32	1
WEEKV _w . 1991-W42-04	ISO 8601 year, week, day of week: <i>yyyy-Www-dd</i>	3–200	11
WORDDATE _w . October 17, 1991	<i>month-name dd, yyyy</i>	3–32	18
WORDDATX _w . 17 October 1991	<i>dd month-name yyyy</i>	3–32	18
YEAR _w . 1991	Year: <i>yyyy</i>	2–32	4
YYMM _w . 1991M10	Year and month: <i>yyyyMmm</i>	5–32	7
YYMMC _w . 1991:10	Year and month: <i>yyyy:mm</i>	5–32	7
YYMMD _w . 1991-10	Year and month: <i>yyyy-mm</i>	5–32	7
YYMMP _w . 1991.10	Year and month: <i>yyyy.mm</i>	5–32	7
YYMMS _w . 1991/10	Year and month: <i>yyyy/mm</i>	5–32	7
YYMMN _w . 199110	Year and month: <i>yyyymm</i>	5–32	7
YYMON _w . 1991OCT	Year and month abbreviation: <i>yyyymon</i>	5–32	7

Table 4.3 *continued*

Format and Example	Description	Width Range	Default Width
YYMMDD _w . 91/10/17	Year, month, day: <i>yy/mm/dd</i>	2–8	8
YYQ _w . 1991Q4	Year and quarter: <i>yyyyQq</i>	4–6	6
YYQC _w . 1991:4	Year and quarter: <i>yyyy:q</i>	4–32	6
YYQD _w . 1991-4	Year and quarter: <i>yyyy-q</i>	4–32	6
YYQP _w . 1991.4	Year and quarter: <i>yyyy.q</i>	4–32	6
YYQS _w . 1991/4	Year and quarter: <i>yyyy/q</i>	4–32	6
YYQN _w . 19914	Year and quarter: <i>yyyyq</i>	3–32	5
YYQR _w . 1991QIV	Year and quarter in roman numerals: <i>yyyyQrr</i>	6–32	8
YYQRC _w . 1991:IV	Year and quarter in roman numerals: <i>yyyy:rr</i>	6–32	8
YYQRD _w . 1991-IV	Year and quarter in roman numerals: <i>yyyy-rr</i>	6–32	8
YYQRP _w . 1991.IV	Year and quarter in roman numerals: <i>yyyy.rr</i>	6–32	8
YYQRS _w . 1991/IV	Year and quarter in roman numerals: <i>yyyy/rr</i>	6–32	8
YYQRN _w . 1991IV	Year and quarter in roman numerals: <i>yyyyrr</i>	6–32	8

Datetime and Time Formats

Table 4.4 lists some of the available SAS datetime and time formats. For each format, the example shows the formatted value. The value of the variable `dt` is '17OCT91:14:25:32'DT. You can specify the width of each format by adding *w*. For formats that allow a decimal value, you can specify the number of decimal digits by adding *d*.

Table 4.4 Frequently Used SAS Datetime and Time Formats

Format	Value and Example	Description	Width Range	Default Width
DATETIME _{w.d}	<code>dt</code> 17OCT91:14:25:32	<i>ddmmyy:hh:mm:ss.ss</i>	7–40	16
DTWKDATX _w	<code>dt</code> Thursday, 17 October 1991	<i>day-of-week, dd month yyyy</i>	3–37	29
HHMM _{w.d}	TIMEPART(<code>dt</code>) 14:26	Hour and minute: <i>hh:mm.mm</i>	2–20	5
HOUR _{w.d}	TIMEPART(<code>dt</code>) 14	Hour: <i>hh.hh</i>	2–20	2
MMSS _{w.d}	HMS(0,MINUTE(<code>dt</code>),SECOND(<code>dt</code>)) 25:32	Minutes and seconds: <i>mm:ss.ss</i>	2–20	5
TIME _{w.d}	TIMEPART(<code>dt</code>) 14:25:32	Time of day: <i>hh:mm:ss.ss</i>	2–20	8
TOD _{w.d}	<code>dt</code> 14:25:32	Time of day: <i>hh:mm:ss.ss</i>	2–20	8

Alignment of SAS Dates

SAS date values that are used to identify time series observations produced by SAS/ETS and SAS High-Performance Forecasting procedures are normally aligned with the beginning of the time intervals that correspond to the observations. For example, for monthly data for 1994, the date values that identify the observations are 1Jan94, 1Feb94, 1Mar94, . . . , 1Dec94.

However, for some applications it might be preferable to use end-of-period dates, such as 31Jan94, 28Feb94, 31Mar94, . . . , 31Dec94. For other applications, such as plotting time series, it might be more convenient to use interval midpoint dates to identify the observations.

Many SAS/ETS and SAS High-Performance Forecasting procedures provide an `ALIGN=` option to control the alignment of dates for outputting time series observations. SAS/ETS procedures that support the `ALIGN=` option are ARIMA, DATASOURCE, ESM, EXPAND, FORECAST, SIMILARITY, TIME-SERIES, UCM, and VARMAX. SAS High-Performance Forecasting procedures that support the `ALIGN=` option are HPFRECONCILE, HPF, HPFDIAGNOSE, HPFENGINE, and HPFEVENTS.

ALIGN=

The `ALIGN=` option can have the following values:

BEGINNING	specifies that dates be aligned to the start of the interval. This is the default. BEGINNING can be abbreviated as BEGIN, BEG, or B.
MIDDLE	specifies that dates be aligned to the interval midpoint, the average of the beginning and ending values. MIDDLE can be abbreviated as MID or M.
ENDING	specifies that dates be aligned to the end of the interval. ENDING can be abbreviated as END or E.

For information about the calculation of the beginning and ending values of intervals, see the section “[Beginning Dates and Datetimes of Intervals](#)” on page 128.

SAS Date, Time, and Datetime Functions

SAS date, time, and datetime functions are used to perform the following tasks:

- compute date, time, and datetime values from calendar and time-of-day values
- compute calendar and time-of-day values from date and datetime values
- convert between date, time, and datetime values
- perform calculations that involve time intervals
- provide information about time intervals
- provide information about seasonality

For all interval functions, you can supply the intervals and other character arguments either directly as a quoted string or as a SAS character variable. When you use a character variable, you should set the length of the character variable to at least the length of the longest string for that variable that is used in the DATA step.

Also, to ensure correct results when using interval functions, use date intervals with date values and datetime intervals with datetime values.

See *SAS Language Reference: Dictionary* for a complete description of these functions.

The following list shows SAS date, time, and datetime functions in alphabetical order.

DATE()

returns today's date as a SAS date value.

DATEJUL(*yyddd*)

returns the SAS date value when given the Julian date in *yyddd* or *yyyyddd* format. For example, **DATE = DATEJUL(99001)**; assigns the SAS date value '01JAN99'D to DATE, and **DATE = DATEJUL(1999365)**; assigns the SAS date value '31DEC1999'D to DATE.

DATEPART(*datetime*)

returns the date part of a SAS datetime value as a date value.

DATETIME()

returns the current date and time of day as a SAS datetime value.

DAY(*date*)

returns the day of the month from a SAS date value.

DHMS(*date, hour, minute, second*)

returns a SAS datetime value for date, hour, minute, and second values.

HMS(*hour, minute, second*)

returns a SAS time value for hour, minute, and second values.

HOLIDAY('*holiday*', *year*)

returns a SAS date value for the holiday and year specified. Valid values for holiday are 'BOXING', 'CANADA', 'CANADAOBSERVED', 'CHRISTMAS', 'COLUMBUS', 'EASTER', 'FATHERS', 'HALLOWEEN', 'LABOR', 'MLK', 'MEMORIAL', 'MOTHERS', 'NEWYEAR', 'THANKSGIVING', 'THANKSGIVINGCANADA', 'USINDEPENDENCE', 'USPRESIDENTS', 'VALENTINES', 'VETERANS', 'VETERANSUSG', 'VETERANSUSPS', and 'VICTORIA'. For example: **EASTER2000 = HOLIDAY('EASTER', 2000)**;

HOUR(*datetime*)

returns the hour from a SAS datetime or time value.

INTCINDEX('*date-interval*', *date*)**INTCINDEX('*datetime-interval*', *datetime*)**

returns the index of the seasonal cycle when given an interval and an appropriate SAS date, datetime, or time value. For example, the seasonal cycle for INTERVAL='DAY' is 'WEEK', so **INTCINDEX('DAY', '01SEP78'D)**; returns 35 because September 1, 1978, is the sixth day of the 35th week of the year. For correct results, date intervals should be used with date values, and datetime intervals should be used with datetime values.

INTCK('*date-interval*', *date1*, *date2* <, '*method*'>)**INTCK('*datetime-interval*', *datetime1*, *datetime2* <, '*method*'>)**

returns the number of boundaries of intervals of the given kind that lie between the two date or datetime values. The optional method argument specifies that the intervals are counted using either a discrete or a continuous method. The default DISCRETE (or DISC or D) method uses discrete time intervals. For the DISCRETE method, the distance in MONTHS between January 31, 2000, and

February 1, 2000, is one month. The CONTINUOUS (or CONT or C) method uses continuous time intervals. For the CONTINUOUS method, the distance in MONTHS between January 15, 2000, and February 14, 2000, is zero, but the distance in MONTHS between January 15, 2000, and February 15, 2000, is one month.

INTCYCLE('interval' <, seasonality >)

returns the interval of the seasonal cycle, given a date, time, or datetime interval. For example, INTCYCLE('MONTH') returns 'YEAR' because the months January, February, ..., December constitute a yearly cycle. INTCYCLE('DAY') returns 'WEEK' because Sunday, Monday, ..., Saturday constitute a weekly cycle.

You can specify the optional *seasonality* argument to construct a cycle other than the default seasonal cycle. For example, INTCYCLE('MONTH', 3) returns 'QTR'. The optional second argument is the seasonal frequency.

INTFIT(date1, date2, 'D')

INTFIT(datetime1, datetime2, 'DT')

INTFIT(obs1, obs2, 'OBS')

returns an interval that fits exactly between two SAS date, datetime, or observation values. That is, if the interval result of the INTFIT function is used with *date1*, 1, and SAMEDAY alignment in the INTNX function, then the result is *date2*. This concept is illustrated in the following example, where result1 is the same as *date1* and result2 is the same as *date2*.

```
FitInterval = INTFIT( date1, date2, 'D' );
result1 = INTNX( FitInterval, date1, 0, 'SAME DAY' );
result2 = INTNX( FitInterval, date1, 1, 'SAME DAY' );
```

More than one interval can fit the preceding definition. For example, two SAS date values that are seven days apart could be fit with either 'DAY7' or 'WEEK'. The INTFIT function chooses the more common interval, so 'WEEK' is the result when the dates are seven days apart. The INTFIT function can be used to detect the possible frequency of the time series or to analyze frequencies of other events in a time series, such as outliers or missing values.

INTFMT('interval' , 'size')

returns a recommended format when given a date, time, or datetime interval for displaying the time ID values associated with a time series of the given interval. The second argument to INTFMT controls the width of the year for date formats; it can take the value 'long' or 'l' to specify that the returned format display a four-digit year or the value 'short' or 's' to specify that the returned format display a two-digit year.

INTGET(date1, date2, date3)

INTGET(datetime1, datetime2, datetime3)

returns an interval that fits three consecutive SAS date or datetime values. The INTGET function examines two intervals: the first interval between *date1* and *date2*, and the second interval between *date2* and *date3*. In order for an interval to be detected, either the two intervals must be the same or one interval must be an integer multiple of the other interval. That is, INTGET assumes that at least two of the dates are consecutive points in the time series, and that the other two dates are also consecutive or represent the points before and after missing observations. The INTGET function

assumes that large values are SAS datetime values, which are measured in seconds, and that smaller values are SAS date values, which are measured in days. The INTGET function can be used to detect the possible frequency of the time series or to analyze frequencies of other events in a time series, such as outliers or missing values.

INTINDEX(*'date-interval'*, *date* <, *seasonality* >)

INTINDEX(*'datetime-interval'*, *datetime* <, *seasonality* >)

returns the seasonal index for the specified date or datetime interval and an appropriate date or datetime value. The seasonal index is a number that represents the position of the date or datetime value in the seasonal cycle of the specified interval. For example, **INTINDEX**(*'MONTH'*, *'01DEC2000'D*); returns 12 because monthly data is yearly periodic and DECEMBER is the 12th month of the year. However, **INTINDEX**(*'DAY'*, *'01DEC2000'D*); returns 6 because daily data is weekly periodic and December 01, 2000, is a Friday, the sixth day of the week. To correctly identify the seasonal index, the interval specification should agree with the date or datetime value. For example, **INTINDEX**(*'DTMONTH'*, *'01DEC2000'D*); and **INTINDEX**(*'MONTH'*, *'01DEC2000:00:00:00'DT*); do not return the expected value of 12. However, both **INTINDEX**(*'MONTH'*, *'01DEC2000'D*); and **INTINDEX**(*'DTMONTH'*, *'01DEC2000:00:00:00'DT*); return the expected value of 12.

You can specify the optional *seasonality* argument to use a seasonal cycle other than the default seasonal cycle. For example, **INTINDEX**(*'MONTH'*, *'01APR2000'D*); returns the value 4, to indicate the fourth month of the year. However, **INTINDEX**(*'MONTH'*, *'01APR2000'D*, 3); and **INTINDEX**(*'MONTH'*, *'01APR2000'D*, *'QTR'*); return the value 1 to indicate the first month of the quarter. Specifying either 3 or *'QTR'* for the third argument uses a quarterly seasonal cycle instead of the default yearly seasonal cycle.

INTNX(*'date-interval'*, *date*, *n* <, *'alignment'* >)

INTNX(*'datetime-interval'*, *datetime*, *n* <, *'alignment'* >)

returns the date or datetime value of the beginning of the interval that is *n* intervals from the interval that contains the given date or datetime value. The optional *alignment* argument specifies that the returned date is aligned to the beginning, middle, or end of the interval. Beginning is the default. In addition, you can specify SAME (S) alignment. The SAME alignment bases the alignment of the calculated date or datetime value on the alignment of the input date or datetime value. As illustrated in the following example, the SAME alignment can be used to calculate the meaning of “same day next year” or “same day two weeks from now.”

```
nextYear = INTNX( 'YEAR', '15Apr2007'D, 1, 'S' );
TwoWeeks = INTNX( 'WEEK', '15Apr2007'D, 2, 'S' );
```

The preceding example returns *'15Apr2008'D* for nextYear and *'29Apr2007'D* for TwoWeeks.

For all values of alignment, the number of discrete intervals *n* between the input date and the resulting date agrees with the input value. In the following example, the result is always that *n2* = *n1*:

```
date2 = INTNX( interval, date1, n1, align );
n2 = INTCK( interval, date1, date2 );
```

The preceding example uses the DISCRETE method of the INTCK function by default. The result *n2* = *n1* does not always apply when the CONTINUOUS method of the INTCK function is specified.

INTSEAS('interval' <, seasonality >)

returns the length of the seasonal cycle for the specified date or datetime interval. The length of a seasonal cycle is the number of intervals in a seasonal cycle. For example, when the interval for a time series is described as monthly, many procedures use the option `INTERVAL=MONTH` to indicate that each observation in the data corresponds to a particular month. Monthly data are considered to be periodic for a one-year seasonal cycle. There are 12 months in one year, so the number of intervals (months) in a seasonal cycle (year) is 12. For quarterly data, there are 4 quarters in one year, so the number of intervals in a seasonal cycle is 4. The periodicity is not always one year. For example, `INTERVAL=DAY` is considered to have a seasonal cycle of one week, and because there are 7 days in a week, the number of intervals in a seasonal cycle is 7.

You can specify the optional *seasonality* argument to use a seasonal cycle other than the default seasonal cycle. For example, `INTSEAS('MONTH', 3)` and `INTSEAS('MONTH', 'QTR')` both specify a quarterly seasonal cycle and return the value 3. If the optional *seasonality* argument is numeric, it is the seasonal frequency. If the optional *seasonality* argument is character, it is the seasonal cycle.

INTSHIFT('interval')

returns the shift interval that applies to the shift index if a subperiod is specified. For example, `YEAR` intervals are shifted by `MONTH`, so `INTSHIFT('YEAR')` returns `'MONTH'`.

INTTEST('interval')

returns 1 if the interval name is valid, 0 otherwise. For example, `VALID = INTTEST('MONTH');` should set `VALID` to 1, while `VALID = INTTEST('NOTANINTERVAL');` should set `VALID` to 0. The `INTTEST` function can be useful in verifying which values of multiplier *n* and the shift index *s* are valid in constructing an interval name.

JULDATE(date)

returns the Julian date from a SAS date value. The format of the Julian date is either `yyddd` or `yyyyddd` depending on the value of the system option `YEARCUTOFF=`. For example, using the default system option values, `JULDATE('31DEC1999'D);` returns 99365, while `JULDATE('31DEC1899'D);` returns 1899365.

MDY(month, day, year)

returns a SAS date value for month, day, and year values.

MINUTE(datetime)

returns the minute from a SAS time or datetime value.

MONTH(date)

returns the numerical value for the month of the year from a SAS date value. For example, `MONTH=MONTH('01JAN2000'D);` returns 1, the numerical value for January.

NWKDOM(*n*, *weekday*, *month*, *year*)

returns a SAS date value for the *n*th weekday of the month and year specified. For example, Thanksgiving is always the fourth (*n*=4) Thursday (*weekday*=5) in November (*month*=11). Thus **THANKS2000** = **NWKDOM(4, 5, 11, 2000)**; returns the SAS date value for Thanksgiving in the year 2000. The last weekday of a month can be specified by using *n*=5. Memorial Day in the United States is the last (*n*=5) Monday (*weekday*=2) in May (*month*=5), and so **MEMORIAL2002** = **NWKDOM(5, 2, 5, 2002)**; returns the SAS date value for Memorial Day in 2002. Because *n* = 5 always specifies the last occurrence of the month and most months have only 4 instances of each day, the result for *n* = 5 is often the same as the result for *n* = 4. NWKDOM is useful for calculating the SAS date values of holidays that are defined in this manner.

QTR(*date*)

returns the quarter of the year from a SAS date value.

SECOND(*date*)

returns the second from a SAS time or datetime value.

TIME()

returns the current time of day.

TIMEPART(*datetime*)

returns the time part of a SAS datetime value.

TODAY()

returns the current date as a SAS date value. (TODAY is another name for the DATE function.)

WEEK(*date* <, '*descriptor*'>)

returns the week of year from a SAS date value. The algorithm used to calculate the week depends on the *descriptor*, which can take the value 'U', 'V', or 'W'.

If the descriptor is 'U', weeks start on Sunday and the range is 0 to 53. If weeks 0 and 53 exist, they are only partial weeks. Week 52 can be a partial week.

If the descriptor is 'V', the result is equivalent to the ISO 8601 week of year definition. The range is 1 to 53. Week 53 is a leap week. The first week of the year, Week 1, and the last week of the year, Week 52 or 53, can include days in another Gregorian calendar year.

If the descriptor is 'W', weeks start on Monday and the range is 0 to 53. If weeks 0 and 53 exist, they are only partial weeks. Week 52 can be a partial week.

WEEKDAY(*date*)

returns the day of the week from a SAS date value. For example **WEEKDAY=WEEKDAY ('17OCT1991' D)**; returns 5, the numerical value for Thursday.

YEAR(*date*)

returns the year from a SAS date value.

YYQ(*year*, *quarter*)

returns a SAS date value for year and quarter values.

References

National Retail Federation (2007), “National Retail Federation 4-5-4 Calendar,” <http://www.nrf.com/>.

Technical Committee ISO/TC 154, D. E., Processes, Documents in Commerce, I., and Administration (2004), *ISO 8601:2004 Data Elements and Interchange Formats—Information Interchange—Representation of Dates and Times, 3rd Edition*, Technical report, International Organization for Standardization.

Chapter 5

SAS Macros and Functions

Contents	
SAS Macros	153
BOXCOXAR Macro	154
DFPVALUE Macro	157
DFTEST Macro	158
LOGTEST Macro	160
Functions	162
PROBDF Function for Dickey-Fuller Tests	162
References	168

SAS Macros

This chapter describes several SAS macros and the SAS function `PROBDF` that are provided with SAS/ETS software. A SAS macro is a program that generates SAS statements. Macros make it easy to produce and execute complex SAS programs that would be time-consuming to write yourself.

SAS/ETS software includes the following macros:

<code>%AR</code>	generates statements to define autoregressive error models for the <code>MODEL</code> procedure.
<code>%BOXCOXAR</code>	investigates Box-Cox transformations useful for modeling and forecasting a time series.
<code>%DFPVALUE</code>	computes probabilities for Dickey-Fuller test statistics.
<code>%DFTEST</code>	performs Dickey-Fuller tests for unit roots in a time series process.
<code>%LOGTEST</code>	tests to see if a log transformation is appropriate for modeling and forecasting a time series.
<code>%MA</code>	generates statements to define moving-average error models for the <code>MODEL</code> procedure.
<code>%PDL</code>	generates statements to define polynomial-distributed lag models for the <code>MODEL</code> procedure.

These macros are part of the SAS AUTOCALL facility and are automatically available for use in your SAS program. See *SAS Macro Language: Reference* for information about the SAS macro facility.

Since the `%AR`, `%MA`, and `%PDL` macros are used only with `PROC MODEL`, they are documented with the `MODEL` procedure. See the sections on the `%AR`, `%MA`, and `%PDL` macros in Chapter 19, “[The MODEL](#)

Procedure,” for more information about these macros. The %BOXCOXAR, %DFPVALUE, %DFTEST, and %LOGTEST macros are described in the following sections.

BOXCOXAR Macro

The %BOXCOXAR macro finds the optimal Box-Cox transformation for a time series.

Transformations of the dependent variable are a useful way of dealing with nonlinear relationships or heteroscedasticity. For example, the logarithmic transformation is often used for modeling and forecasting time series that show exponential growth or that show variability proportional to the level of the series.

The Box-Cox transformation is a general class of power transformations that include the log transformation and no transformation as special cases. The Box-Cox transformation is

$$Y_t = \begin{cases} \frac{(X_t + c)^\lambda - 1}{\lambda} & \text{for } \lambda \neq 0 \\ \ln(X_t + c) & \text{for } \lambda = 0 \end{cases}$$

The parameter λ controls the shape of the transformation. For example, $\lambda=0$ produces a log transformation, while $\lambda=0.5$ results in a square root transformation. When $\lambda=1$, the transformed series differs from the original series by $c - 1$.

The constant c is optional. It can be used when some X_t values are negative or 0. You choose c so that the series X_t is always greater than $-c$.

The %BOXCOXAR macro tries a range of λ values and reports which of the values tried produces the optimal Box-Cox transformation. To evaluate different λ values, the %BOXCOXAR macro transforms the series with each λ value and fits an autoregressive model to the transformed series. It is assumed that this autoregressive model is a reasonably good approximation to the true time series model appropriate for the transformed series. The likelihood of the data under each autoregressive model is computed, and the λ value that produces the maximum likelihood over the values tried is reported as the optimal Box-Cox transformation for the series.

The %BOXCOXAR macro prints and optionally writes to a SAS data set all of the λ values tried, the corresponding log-likelihood value, and related statistics for the autoregressive model.

You can control the range and number of λ values tried. You can also control the order of the autoregressive models fit to the transformed series. You can difference the transformed series before the autoregressive model is fit.

Note that the Box-Cox transformation might be appropriate when the data have a common distribution (apart from heteroscedasticity) but not when groups of observations for the variable are quite different. Thus the %BOXCOXAR macro is more often appropriate for time series data than for cross-sectional data.

Syntax

The form of the %BOXCOXAR macro is

%BOXCOXAR (*SAS-data-set*, *variable* < , *options* >);

The first argument, *SAS-data-set*, specifies the name of the SAS data set that contains the time series to be analyzed. The second argument, *variable*, specifies the time series variable name to be analyzed. The first two arguments are required.

The following options can be used with the %BOXCOXAR macro. Options must follow the required arguments and are separated by commas.

AR=*n*

specifies the order of the autoregressive model fit to the transformed series. The default is AR=5.

CONST=*value*

specifies a constant *c* to be added to the series before transformation. Use the CONST= option when some values of the series are 0 or negative. The default is CONST=0.

DIF=(*differencing-list*)

specifies the degrees of differencing to apply to the transformed series before the autoregressive model is fit. The *differencing-list* is a list of positive integers separated by commas and enclosed in parentheses. For example, DIF=(1,12) specifies that the transformed series be differenced once at lag 1 and once at lag 12. For more details, see the section “[IDENTIFY Statement](#)” on page 230 in Chapter 7, “[The ARIMA Procedure](#).”

LAMBDABI=*value*

specifies the maximum value of lambda for the grid search. The default is LAMBDABI=1. A large (in magnitude) LAMBDABI= value can result in problems with floating point arithmetic.

LAMBDALO=*value*

specifies the minimum value of lambda for the grid search. The default is LAMBDALO=0. A large (in magnitude) LAMBDALO= value can result in problems with floating point arithmetic.

NLAMBDA=*value*

specifies the number of lambda values considered, including the LAMBDALO= and LAMBDABI= option values. The default is NLAMBDA=2.

OUT=*SAS-data-set*

writes the results to an output data set. The output data set includes the lambda values tried (LAMBDA), and for each lambda value, the log likelihood (LOGLIK), residual mean squared error (RMSE), Akaike Information Criterion (AIC), and Schwarz’s Bayesian Criterion (SBC).

PRINT=YES | NO

specifies whether results are printed. The default is PRINT=YES. The printed output contains the lambda values, log likelihoods, residual mean square errors, Akaike Information Criterion (AIC), and Schwarz’s Bayesian Criterion (SBC).

Results

The value of λ that produces the maximum log likelihood is returned in the macro variable &BOXCOXAR. The value of the variable &BOXCOXAR is “ERROR” if the %BOXCOXAR macro is unable to compute the best transformation due to errors. This might be the result of large lambda values. The Box-Cox transformation parameter involves exponentiation of the data, so that large lambda values can cause floating-point overflow.

Results are printed unless the PRINT=NO option is specified. Results are also stored in SAS data sets when the OUT= option is specified.

Details

Assume that the transformed series Y_t is a stationary p th order autoregressive process generated by independent normally distributed innovations.

$$(1 - \Theta(B))(Y_t - \mu) = \epsilon_t$$

$$\epsilon_t \sim iidN(0, \sigma^2)$$

Given these assumptions, the log-likelihood function of the transformed data Y_t is

$$\begin{aligned} l_Y(\cdot) = & -\frac{n}{2}\ln(2\pi) - \frac{1}{2}\ln(|\Sigma|) - \frac{n}{2}\ln(\sigma^2) \\ & - \frac{1}{2\sigma^2}(\mathbf{Y} - \mathbf{1}\mu)' \Sigma^{-1}(\mathbf{Y} - \mathbf{1}\mu) \end{aligned}$$

In this equation, n is the number of observations, μ is the mean of Y_t , $\mathbf{1}$ is the n -dimensional column vector of 1s, σ^2 is the innovation variance, $\mathbf{Y} = (Y_1, \dots, Y_n)'$, and Σ is the covariance matrix of Y .

The log-likelihood function of the original data X_1, \dots, X_n is

$$l_X(\cdot) = l_Y(\cdot) + (\lambda - 1) \sum_{t=1}^n \ln(X_t + c)$$

where c is the value of the CONST= option.

For each value of λ , the maximum log-likelihood of the original data is obtained from the maximum log-likelihood of the transformed data given the maximum likelihood estimate of the autoregressive model.

The maximum log-likelihood values are used to compute the Akaike Information Criterion (AIC) and Schwarz's Bayesian Criterion (SBC) for each λ value. The residual mean squared error based on the maximum likelihood estimator is also produced. To compute the mean squared error, the predicted values from the model are transformed again to the original scale (Pankratz 1983, pp. 256–258, and Taylor 1986).

After differencing as specified by the DIF= option, the process is assumed to be a stationary autoregressive process. You can check for stationarity of the series with the %DFTEST macro. If the process is not stationary, differencing with the DIF= option is recommended. For a process with moving-average terms, a large value for the AR= option might be appropriate.

DFPVALUE Macro

The %DFPVALUE macro computes the significance of the Dickey-Fuller test. The %DFPVALUE macro evaluates the p -value for the Dickey-Fuller test statistic τ for the test of H_0 : “The time series has a unit root” versus H_a : “The time series is stationary” using tables published by Dickey (1976) and Dickey, Hasza, and Fuller (1984).

The %DFPVALUE macro can compute p -values for tests of a simple unit root with lag 1 or for seasonal unit roots at lags 2, 4, or 12. The %DFPVALUE macro takes into account whether an intercept or deterministic time trend is assumed for the series.

The %DFPVALUE macro is used by the %DFTEST macro described later in this chapter.

Note that the %DFPVALUE macro has been superseded by the PROBDF function described later in this chapter. It remains for compatibility with past releases of SAS/ETS.

Syntax

The %DFPVALUE macro has the following form:

```
%DFPVALUE ( tau, nobs < , options > ) ;
```

The first argument, *tau*, specifies the value of the Dickey-Fuller test statistic.

The second argument, *nobs*, specifies the number of observations on which the test statistic is based.

The first two arguments are required. The following options can be used with the %DFPVALUE macro. Options must follow the required arguments and are separated by commas.

DLAG=1 | 2 | 4 | 12

specifies the lag period of the unit root to be tested. DLAG=1 specifies a one-period unit root test. DLAG=2 specifies a test for a seasonal unit root with lag 2. DLAG=4 specifies a test for a seasonal unit root with lag 4. DLAG=12 specifies a test for a seasonal unit root with lag 12. The default is DLAG=1.

TREND=0 | 1 | 2

specifies the degree of deterministic time trend included in the model. TREND=0 specifies no trend and assumes the series has a zero mean. TREND=1 includes an intercept term. TREND=2 specifies both an intercept and a deterministic linear time trend term. The default is TREND=1. TREND=2 is not allowed with DLAG=2, 4, or 12.

Results

The computed p -value is returned in the macro variable &DFPVALUE. If the p -value is less than 0.01 or larger than 0.99, the macro variable &DFPVALUE is set to 0.01 or 0.99, respectively.

Minimum Observations

The minimum number of observations required by the %DFPVALUE macro depends on the value of the DLAG= option. The minimum observations are as follows:

DLAG=	Minimum Observations
1	9
2	6
4	4
12	12

DFTEST Macro

The %DFTEST macro performs the Dickey-Fuller unit root test. You can use the %DFTEST macro to decide whether a time series is stationary and to determine the order of differencing required for the time series analysis of a nonstationary series.

Most time series analysis methods require that the series to be analyzed is stationary. However, many economic time series are nonstationary processes. The usual approach to this problem is to difference the series. A time series that can be made stationary by differencing is said to have a *unit root*. For more information, see the discussion of this issue in the section “[Getting Started: ARIMA Procedure](#)” on page 195 of Chapter 7, “[The ARIMA Procedure](#).”

The Dickey-Fuller test is a method for testing whether a time series has a unit root. The %DFTEST macro tests the hypothesis H_0 : “The time series has a unit root” versus H_a : “The time series is stationary” based on tables provided in Dickey (1976) and Dickey, Hasza, and Fuller (1984). The test can be applied for a simple unit root with lag 1, or for seasonal unit roots at lag 2, 4, or 12.

Note that the %DFTEST macro has been superseded by the PROC ARIMA stationarity tests. See Chapter 7, “[The ARIMA Procedure](#),” for details.

Syntax

The %DFTEST macro has the following form:

```
%DFTEST ( SAS-data-set, variable < , options > ) ;
```

The first argument, *SAS-data-set*, specifies the name of the SAS data set that contains the time series variable to be analyzed.

The second argument, *variable*, specifies the time series variable name to be analyzed.

The first two arguments are required. The following options can be used with the %DFTEST macro. Options must follow the required arguments and are separated by commas.

AR=*n*

specifies the order of autoregressive model fit after any differencing specified by the DIF= and DLAG= options. The default is AR=3.

DIF= (*differencing-list*)

specifies the degrees of differencing to be applied to the series. The differencing list is a list of positive integers separated by commas and enclosed in parentheses. For example, DIF=(1,12) specifies that the series be differenced once at lag 1 and once at lag 12. For more details, see the section “[IDENTIFY Statement](#)” on page 230 in Chapter 7, “[The ARIMA Procedure](#).”

If the option DIF=(d_1, \dots, d_k) is specified, the series analyzed is $(1 - B^{d_1}) \cdots (1 - B^{d_k})Y_t$, where Y_t is the variable specified, and B is the backshift operator defined by $BY_t = Y_{t-1}$.

DLAG=1 | 2 | 4 | 12

specifies the lag to be tested for a unit root. The default is DLAG=1.

OUT=SAS-data-set

writes residuals to an output data set.

OUTSTAT=SAS-data-set

writes the test statistic, parameter estimates, and other statistics to an output data set.

TREND=0 | 1 | 2

specifies the degree of deterministic time trend included in the model. TREND=0 includes no deterministic term and assumes the series has a zero mean. TREND=1 includes an intercept term. TREND=2 specifies an intercept and a linear time trend term. The default is TREND=1. TREND=2 is not allowed with DLAG=2, 4, or 12.

Results

The computed p -value is returned in the macro variable &DFTEST. If the p -value is less than 0.01 or larger than 0.99, the macro variable &DFTEST is set to 0.01 or 0.99, respectively. (The same value is given in the macro variable &DFPVALUE returned by the %DFPVALUE macro, which is used by the %DFTEST macro to compute the p -value.)

Results can be stored in SAS data sets with the OUT= and OUTSTAT= options.

Minimum Observations

The minimum number of observations required by the %DFTEST macro depends on the value of the DLAG= option. Let s be the sum of the differencing orders specified by the DIF= option, let t be the value of the TREND= option, and let p be the value of the AR= option. The minimum number of observations required is as follows:

DLAG=	Minimum Observations
1	$1 + p + s + \max(9, p + t + 2)$
2	$2 + p + s + \max(6, p + t + 2)$
4	$4 + p + s + \max(4, p + t + 2)$
12	$12 + p + s + \max(12, p + t + 2)$

Observations are not used if they have missing values for the series or for any lag or difference used in the autoregressive model.

LOGTEST Macro

The %LOGTEST macro tests whether a logarithmic transformation is appropriate for modeling and forecasting a time series. The logarithmic transformation is often used for time series that show exponential growth or variability proportional to the level of the series.

The %LOGTEST macro fits an autoregressive model to a series and fits the same model to the log of the series. Both models are estimated by the maximum-likelihood method, and the maximum log-likelihood values for both autoregressive models are computed. These log-likelihood values are then expressed in terms of the original data and compared.

You can control the order of the autoregressive models. You can also difference the series and the log-transformed series before the autoregressive model is fit.

You can print the log-likelihood values and related statistics (AIC, SBC, and MSE) for the autoregressive models for the series and the log-transformed series. You can also output these statistics to a SAS data set.

Syntax

The %LOGTEST macro has the following form:

```
%LOGTEST ( SAS-data-set, variable, < options > );
```

The first argument, *SAS-data-set*, specifies the name of the SAS data set that contains the time series variable to be analyzed. The second argument, *variable*, specifies the time series variable name to be analyzed.

The first two arguments are required. The following options can be used with the %LOGTEST macro. Options must follow the required arguments and are separated by commas.

AR=*n*

specifies the order of the autoregressive model fit to the series and the log-transformed series. The default is AR=5.

CONST=*value*

specifies a constant to be added to the series before transformation. Use the CONST= option when some values of the series are 0 or negative. The series analyzed must be greater than the negative of the CONST= value. The default is CONST=0.

DIF=(*differencing-list*)

specifies the degrees of differencing applied to the original and log-transformed series before fitting the autoregressive model. The *differencing-list* is a list of positive integers separated by commas and enclosed in parentheses. For example, DIF=(1,12) specifies that the transformed series be differenced once at lag 1 and once at lag 12. For more details, see the section “[IDENTIFY Statement](#)” on page 230 in Chapter 7, “[The ARIMA Procedure](#).”

OUT=*SAS-data-set*

writes the results to an output data set. The output data set includes a variable TRANS that identifies the transformation (LOG or NONE), the log-likelihood value (LOGLIK), residual mean squared error

(RMSE), Akaike Information Criterion (AIC), and Schwarz's Bayesian Criterion (SBC) for the log-transformed and untransformed cases.

PRINT=YES | NO

specifies whether the results are printed. The default is PRINT=NO. The printed output shows the log-likelihood value, residual mean squared error, Akaike Information Criterion (AIC), and Schwarz's Bayesian Criterion (SBC) for the log-transformed and untransformed cases.

Results

The result of the test is returned in the macro variable &LOGTEST. The value of the &LOGTEST variable is 'LOG' if the model fit to the log-transformed data has a larger log likelihood than the model fit to the untransformed series. The value of the &LOGTEST variable is 'NONE' if the model fit to the untransformed data has a larger log likelihood. The variable &LOGTEST is set to 'ERROR' if the %LOGTEST macro is unable to compute the test due to errors.

Results are printed when the PRINT=YES option is specified. Results are stored in SAS data sets when the OUT= option is specified.

Details

Assume that a time series X_t is a stationary p th order autoregressive process with normally distributed white noise innovations. That is,

$$(1 - \Theta(B))(X_t - \mu_x) = \epsilon_t$$

where μ_x is the mean of X_t .

The log likelihood function of X_t is

$$l_1(\cdot) = -\frac{n}{2}\ln(2\pi) - \frac{1}{2}\ln(|\Sigma_{xx}|) - \frac{n}{2}\ln(\sigma_e^2) \\ - \frac{1}{2\sigma_e^2}(\mathbf{X} - \mathbf{1}\mu_x)' \Sigma_{xx}^{-1}(\mathbf{X} - \mathbf{1}\mu_x)$$

where n is the number of observations, $\mathbf{1}$ is the n -dimensional column vector of 1s, σ_e^2 is the variance of the white noise, $\mathbf{X} = (X_1, \dots, X_n)'$, and Σ_{xx} is the covariance matrix of \mathbf{X} .

On the other hand, if the log-transformed time series $Y_t = \ln(X_t + c)$ is a stationary p th order autoregressive process, the log-likelihood function of X_t is

$$l_0(\cdot) = -\frac{n}{2}\ln(2\pi) - \frac{1}{2}\ln(|\Sigma_{yy}|) - \frac{n}{2}\ln(\sigma_e^2) \\ - \frac{1}{2\sigma_e^2}(\mathbf{Y} - \mathbf{1}\mu_y)' \Sigma_{yy}^{-1}(\mathbf{Y} - \mathbf{1}\mu_y) - \sum_{t=1}^n \ln(X_t + c)$$

where μ_y is the mean of Y_t , $\mathbf{Y} = (Y_1, \dots, Y_n)'$, and Σ_{yy} is the covariance matrix of \mathbf{Y} .

The %LOGTEST macro compares the maximum values of $l_1(\cdot)$ and $l_0(\cdot)$ and determines which is larger.

The %LOGTEST macro also computes the Akaike Information Criterion (AIC), Schwarz's Bayesian Criterion (SBC), and residual mean squared error based on the maximum likelihood estimator for the autoregressive model. For the mean squared error, retransformation of forecasts is based on Pankratz (1983, pp. 256–258).

After differencing as specified by the DIF= option, the process is assumed to be a stationary autoregressive process. You might want to check for stationarity of the series using the %DFTEST macro. If the process is not stationary, differencing with the DIF= option is recommended. For a process with moving average terms, a large value for the AR= option might be appropriate.

Functions

PROBDF Function for Dickey-Fuller Tests

The PROBDF function calculates significance probabilities for Dickey-Fuller tests for unit roots in time series. The PROBDF function can be used wherever SAS library functions can be used, including DATA step programs, SCL programs, and PROC MODEL programs.

Syntax

PROBDF(*x*, *n* < , *d* < , *type* > >)

<i>x</i>	is the test statistic.
<i>n</i>	is the sample size. The minimum value of <i>n</i> allowed depends on the value specified for the third argument <i>d</i> . For <i>d</i> in the set (1,2,4,6,12), <i>n</i> must be an integer greater than or equal to $\max(2d, 5)$; for other values of <i>d</i> the minimum value of <i>n</i> is 24.
<i>d</i>	is an optional integer giving the degree of the unit root tested for. Specify <i>d</i> = 1 for tests of a simple unit root $(1 - B)$. Specify <i>d</i> equal to the seasonal cycle length for tests for a seasonal unit root $(1 - B^d)$. The default value of <i>d</i> is 1; that is, a test for a simple unit root $(1 - B)$ is assumed if <i>d</i> is not specified. The maximum value of <i>d</i> allowed is 12.
<i>type</i>	is an optional character argument that specifies the type of test statistic used. The values of <i>type</i> are the following:
SZM	studentized test statistic for the zero mean (no intercept) case
RZM	regression test statistic for the zero mean (no intercept) case
SSM	studentized test statistic for the single mean (intercept) case
RSM	regression test statistic for the single mean (intercept) case
STR	studentized test statistic for the deterministic time trend case
RTR	regression test statistic for the deterministic time trend case

The values STR and RTR are allowed only when $d = 1$. The default value of *type* is SZM.

Details

Theoretical Background

When a time series has a unit root, the series is nonstationary and the ordinary least squares (OLS) estimator is not normally distributed. Dickey (1976) and Dickey and Fuller (1979) studied the limiting distribution of the OLS estimator of autoregressive models for time series with a simple unit root. Dickey, Hasza, and Fuller (1984) obtained the limiting distribution for time series with seasonal unit roots. We will mainly introduce the nonseasonal tests in the following and list references for the nonseasonal tests.

Consider the Dickey-Fuller regression first. The null hypothesis is that there is an autoregressive unit root $H_0 : \alpha = 1$, and the alternative is $H_a : |\alpha| < 1$, where α is the autoregressive coefficient of the time series

$$y_t = \alpha y_{t-1} + \epsilon_t$$

This is referred to as the zero mean (ZM) model. The standard Dickey-Fuller (DF) test assumes that errors ϵ_t are white noise. There are two other types of regression models that include a constant or a time trend as follows:

$$y_t = \mu + \alpha y_{t-1} + \epsilon_t$$

$$y_t = \mu + \beta t + \alpha y_{t-1} + \epsilon_t$$

These two models are referred to as the constant mean model (SM) and the trend model (TR), respectively. The constant mean model includes a constant mean μ of the time series. However, the interpretation of μ depends on the stationarity in the following sense: the mean in the stationary case when $\alpha < 1$ is the trend in the integrated case when $\alpha = 1$. Therefore, the null hypothesis should be the joint hypothesis that $\alpha = 1$ and $\mu = 0$. However for the unit root tests, the test statistics are concerned with the null hypothesis of $\alpha = 1$. The joint null hypothesis is not commonly used. This issue is address in Bhargava, A. (1986) with a different nesting model.

Under the null of $I(1)$ of the Dickey-Fuller test, the differenced process is not serially correlated. There is a great need for the generalization of this specification. The augmented Dickey-Fuller (ADF) test, originally proposed in Dickey and Fuller (1979), adjusts for the serial correlation in the time series by adding lagged first differences to the autoregressive model as follows. Consider the $(p + 1)$ th order autoregressive time series

$$y_t = \alpha_1 y_{t-1} + \alpha_2 y_{t-2} + \cdots + \alpha_{p+1} y_{t-p-1} + e_t$$

and its characteristic equation

$$m^{p+1} - \alpha_1 m^p - \alpha_2 m^{p-1} - \cdots - \alpha_{p+1} = 0$$

If all the characteristic roots are less than 1 in absolute value, y_t is stationary. y_t is nonstationary if there is a unit root. If there is a unit root, the sum of the autoregressive parameters is 1, and hence you can test for a unit root by testing whether the sum of the autoregressive parameters is 1 or not. The no-intercept model is parameterized as

$$\nabla y_t = \delta y_{t-1} + \theta_1 \nabla y_{t-1} + \cdots + \theta_p \nabla y_{t-p} + e_t$$

where $\nabla y_t = y_t - y_{t-1}$ and

$$\delta = \alpha_1 + \cdots + \alpha_{p+1} - 1$$

$$\theta_k = -\alpha_{k+1} - \cdots - \alpha_{p+1}$$

The estimators are obtained by regressing ∇y_t on $y_{t-1}, \nabla y_{t-1}, \dots, \nabla y_{t-p}$. The t statistic of the ordinary least squares estimator of δ is the test statistic for the unit root test.

If the *type* argument value specifies a test for a nonzero mean (intercept case), the autoregressive model includes a mean term α_0 . If the *type* argument value specifies a test for a time trend, the model also includes a time trend term and the model is as follows:

$$\nabla y_t = \alpha_0 + \gamma t + \delta y_{t-1} + \theta_1 \nabla y_{t-1} + \cdots + \theta_p \nabla y_{t-p} + e_t$$

For testing for a seasonal unit root, consider the multiplicative model

$$(1 - \alpha_d B^d)(1 - \theta_1 B - \cdots - \theta_p B^p)y_t = e_t$$

Let $\nabla^d y_t \equiv y_t - y_{t-d}$. The test statistic is calculated in the following steps:

1. Regress $\nabla^d y_t$ on $\nabla^d y_{t-1} \cdots \nabla^d y_{t-p}$ to obtain the initial estimators $\hat{\theta}_i$ and compute residuals \hat{e}_t . Under the null hypothesis that $\alpha_d = 1$, $\hat{\theta}_i$ are consistent estimators of θ_i .
2. Regress \hat{e}_t on $(1 - \hat{\theta}_1 B - \cdots - \hat{\theta}_p B^p)y_{t-d}, \nabla^d y_{t-1}, \dots, \nabla^d y_{t-p}$ to obtain estimates of $\delta = \alpha_d - 1$ and $\theta_i - \hat{\theta}_i$.

The t ratio for the estimate of δ produced by the second step is used as a test statistic for testing for a seasonal unit root. The estimates of θ_i are obtained by adding the estimates of $\theta_i - \hat{\theta}_i$ from the second step to $\hat{\theta}_i$ from the first step.

The series $(1 - B^d)y_t$ is assumed to be stationary, where d is the value of the third argument to the PROBDF function.

If the series is an ARMA process, a large value of p might be desirable in order to obtain a reliable test statistic. To determine an appropriate value for p , see Said and Dickey (1984).

Test Statistics

The Dickey-Fuller test is used to test the null hypothesis that the time series exhibits a lag d unit root against the alternative of stationarity. The PROBDF function computes the probability of observing a test statistic more extreme than x under the assumption that the null hypothesis is true. You should reject the unit root hypothesis when PROBDF returns a small (significant) probability value.

Consider the Dickey-Fuller regression first. There are several different versions of the Dickey-Fuller test. The PROBDF function supports six versions, as selected by the *type* argument. Specify the *type* value that corresponds to the way that you calculated the test statistic x .

The last two characters of the *type* value specify the kind of regression model used to compute the Dickey-Fuller test statistic. The meaning of the last two characters of the *type* value are as follows:

ZM zero mean or no-intercept case. The test statistic x is assumed to be computed from the regression model

$$y_t = \alpha y_{t-1} + e_t$$

SM single mean or intercept case. The test statistic x is assumed to be computed from the regression model

$$y_t = \mu + \alpha y_{t-1} + e_t$$

TR intercept and deterministic time trend case. The test statistic x is assumed to be computed from the regression model

$$y_t = \mu + \gamma t + \alpha y_{t-1} + e_t$$

The first character of the *type* value specifies whether the regression test statistic or the studentized test statistic is used. Let $\hat{\alpha}$ be the estimated regression coefficient for the lag of the series, and let $se_{\hat{\alpha}}$ be the standard error of $\hat{\alpha}$. The meaning of the first character of the *type* value is as follows:

R the regression-coefficient-based test statistic. The test statistic is

$$\rho = n(\hat{\alpha} - 1)$$

S the studentized test statistic. The test statistic is

$$DF_{\tau} = \frac{(\hat{\alpha} - 1)}{se_{\hat{\alpha}}}$$

The first one is also called ρ -test and the second is called τ -test. For the zero mean model, the asymptotic distributions of the Dickey-Fuller test statistics are

$$\begin{aligned} n(\hat{\alpha} - 1) &\Rightarrow \left(\int_0^1 W(r) dW(r) \right) \left(\int_0^1 W(r)^2 dr \right)^{-1} \\ DF_{\tau} &\Rightarrow \left(\int_0^1 W(r) dW(r) \right) \left(\int_0^1 W(r)^2 dr \right)^{-1/2} \end{aligned}$$

For the constant mean model, the asymptotic distributions are

$$\begin{aligned} n(\hat{\alpha} - 1) &\Rightarrow \left([W(1)^2 - 1]/2 - W(1) \int_0^1 W(r) dr \right) \left(\int_0^1 W(r)^2 dr - \left(\int_0^1 W(r) dr \right)^2 \right)^{-1} \\ DF_{\tau} &\Rightarrow \left([W(1)^2 - 1]/2 - W(1) \int_0^1 W(r) dr \right) \left(\int_0^1 W(r)^2 dr - \left(\int_0^1 W(r) dr \right)^2 \right)^{-1/2} \end{aligned}$$

For the trend model, the asymptotic distributions are

$$n(\hat{\alpha} - 1) \Rightarrow \left[W(r)dW + 12 \left(\int_0^1 rW(r)dr - \frac{1}{2} \int_0^1 W(r)dr \right) \left(\int_0^1 W(r)dr - \frac{1}{2}W(1) \right) - W(1) \int_0^1 W(r)dr \right] D^{-1}$$

$$DF_{\tau} \Rightarrow \left[W(r)dW + 12 \left(\int_0^1 rW(r)dr - \frac{1}{2} \int_0^1 W(r)dr \right) \left(\int_0^1 W(r)dr - \frac{1}{2}W(1) \right) - W(1) \int_0^1 W(r)dr \right] D^{1/2}$$

where

$$D = \int_0^1 W(r)^2 dr - 12 \left(\int_0^1 r(W(r)dr \right)^2 + 12 \int_0^1 W(r)dr \int_0^1 rW(r)dr - 4 \left(\int_0^1 W(r)dr \right)^2$$

See Dickey and Fuller (1979), Dickey, Hasza, and Fuller (1984), and Hamilton (1994) for more information about the Dickey-Fuller test null distribution. The preceding formulas are for the basic Dickey-Fuller test. The PROBDF function can also be used for the augmented Dickey-Fuller test, in which the error term e_t is modeled as an autoregressive process; however, the test statistic is computed somewhat differently for the augmented Dickey-Fuller test. For the nonseasonal augmented Dickey-Fuller test, the test statistics can take one of the two forms similar to Dickey-Fuller test. One is the OLS t value

$$\frac{\hat{\alpha} - 1}{sd(\hat{\alpha})}$$

and the other is given by

$$\frac{n(\hat{\alpha} - 1)}{1 - \hat{\alpha}_1 - \dots - \hat{\alpha}_p}$$

The asymptotic distributions of the test statistics are the same as those of the standard Dickey-Fuller test statistics. See Dickey, Hasza, and Fuller (1984) and Hamilton (1994) for information about seasonal and nonseasonal augmented Dickey-Fuller tests.

The PROBDF function is calculated from approximating functions fit to empirical quantiles that are produced by a Monte Carlo simulation that employs 10^8 replications for each simulation. Separate simulations were performed for selected values of n and for $d = 1, 2, 4, 6, 12$ (where n and d are the second and third arguments to the PROBDF function).

The maximum error of the PROBDF function is approximately $\pm 10^{-3}$ for d in the set (1,2,4,6,12) and can be slightly larger for other d values. (Because the number of simulation replications used to produce the PROBDF function is much greater than the 60,000 replications used by Dickey and Fuller (1979) and Dickey, Hasza, and Fuller (1984), the PROBDF function can be expected to produce results that are substantially more accurate than the critical values reported in those papers.)

Examples

Suppose the data set TEST contains 104 observations of the time series variable Y, and you want to test the null hypothesis that there exists a lag 4 seasonal unit root in the Y series. The following statements illustrate how to perform the single-mean Dickey-Fuller regression coefficient test using PROC REG and PROBDF.

```
data test1;
    set test;
    y4 = lag4(y);
run;

proc reg data=test1 outest=alpha;
    model y = y4 / noprint;
run;

data _null_;
    set alpha;
    x = 100 * ( y4 - 1 );
    p = probdf( x, 100, 4, "RSM" );
    put p= pvalue5.3;
run;
```

To perform the augmented Dickey-Fuller test, regress the differences of the series on lagged differences and on the lagged value of the series, and compute the test statistic from the regression coefficient for the lagged series. The following statements illustrate how to perform the single-mean augmented Dickey-Fuller studentized test for a simple unit root using PROC REG and PROBDF:

```
data test1;
    set test;
    y1 = lag(y);
    yd = dif(y);
    yd1 = lag1(yd); yd2 = lag2(yd);
    yd3 = lag3(yd); yd4 = lag4(yd);
run;

proc reg data=test1 outest=alpha covout;
    model yd = y1 yd1-yd4 / noprint;
run;

data _null_;
    set alpha;
    retain a;
    if _type_ = 'PARMS' then a = y1 ;
    if _type_ = 'COV' & _NAME_ = 'Y1' then do;
        x = a / sqrt(y1);
        p = probdf( x, 99, 1, "SSM" );
        put p= pvalue5.3;
    end;
run;
```

The %DFTEST macro provides an easier way to perform Dickey-Fuller tests. The following statements perform the same tests as the preceding example:

```
%dfctest( test, y, ar=4 );
%put p=&dfctest;
```

References

- Bhargava, A. (1986), "On the Theory of Testing for Unit Roots in Observed Time Series", *The Review of Economic Studies*, 53, 369-384.
- Dickey, D. A. (1976), "Estimation and Testing of Nonstationary Time Series," Unpublished Ph.D. Thesis, Iowa State University, Ames.
- Dickey, D. A. and Fuller, W. A. (1979), "Distribution of the Estimation for Autoregressive Time Series with a Unit Root," *Journal of the American Statistical Association*, 74, 427-431.
- Dickey, D. A., Hasza, D. P., and Fuller, W. A. (1984), "Testing for Unit Roots in Seasonal Time Series," *Journal of the American Statistical Association*, 79, 355-367.
- Hamilton, J. D. (1994), *Time Series Analysis*, Princeton, NJ: Princeton University Press.
- Microsoft Excel 2000 Online Help, Redmond, WA: Microsoft Corp.
- Pankratz, A. (1983), *Forecasting with Univariate Box-Jenkins Models: Concepts and Cases*. New York: John Wiley.
- Said, S. E. and Dickey, D. A. (1984), "Testing for Unit Roots in ARMA Models of Unknown Order," *Biometrika*, 71, 599-607.
- Taylor, J. M. G. (1986) "The Retransformed Mean After a Fitted Power Transformation," *Journal of the American Statistical Association*, 81, 114-118.

Chapter 6

Nonlinear Optimization Methods

Contents

Overview	169
Options	169
Details of Optimization Algorithms	179
Overview	179
Choosing an Optimization Algorithm	180
Algorithm Descriptions	181
Remote Monitoring	184
ODS Table Names	187
References	189

Overview

Several SAS/ETS procedures (COUNTREG, ENTROPY, MDC, QLIM, UCM, and VARMAX) use the nonlinear optimization (NLO) subsystem to perform nonlinear optimization. This chapter describes the options of the NLO system and some technical details of the available optimization methods. Note that not all options have been implemented for all procedures that use the NLO subsystem. You should check each procedure chapter for more details about which options are available.

Options

The following table summarizes the options available in the NLO system.

Table 6.1 NLO options

Option	Description
Optimization Specifications	
TECHNIQUE=	minimization technique
UPDATE=	update technique
LINESEARCH=	line-search method

Table 6.1 *continued*

Option	Description
LSPRECISION=	line-search precision
HESCAL=	type of Hessian scaling
INHESSIAN=	start for approximated Hessian
RESTART=	iteration number for update restart
Termination Criteria Specifications	
MAXFUNC=	maximum number of function calls
MAXITER=	maximum number of iterations
MINITER=	minimum number of iterations
MAXTIME=	upper limit seconds of CPU time
ABSCONV=	absolute function convergence criterion
ABSFCNV=	absolute function convergence criterion
ABSGCONV=	absolute gradient convergence criterion
ABSXCONV=	absolute parameter convergence criterion
FCONV=	relative function convergence criterion
FCONV2=	relative function convergence criterion
GCONV=	relative gradient convergence criterion
XCONV=	relative parameter convergence criterion
FSIZE=	used in FCONV, GCONV criterion
XSIZE=	used in XCONV criterion
Step Length Options	
DAMPSTEP=	damped steps in line search
MAXSTEP=	maximum trust region radius
INSTEP=	initial trust region radius
Printed Output Options	
PALL	display (almost) all printed optimization-related output
PHISTORY	display optimization history
PHISTPARMS	display parameter estimates in each iteration
PSHORT	reduce some default optimization-related output
PSUMMARY	reduce most default optimization-related output
NOPRINT	suppress all printed optimization-related output
Remote Monitoring Options	
SOCKET=	specify the fileref for remote monitoring

These options are described in alphabetical order.

ABSCONV=*r*

ABSTOL=*r*

specifies an absolute function convergence criterion. For minimization, termination requires $f(\theta^{(k)}) \leq r$. The default value of r is the negative square root of the largest double-precision value, which serves only as a protection against overflows.

ABSFCNV=*r*[*n*]

ABSFTOL=*r*[*n*]

specifies an absolute function convergence criterion. For all techniques except NMSIMP, termination requires a small change of the function value in successive iterations:

$$|f(\theta^{(k-1)}) - f(\theta^{(k)})| \leq r$$

The same formula is used for the NMSIMP technique, but $\theta^{(k)}$ is defined as the vertex with the lowest function value, and $\theta^{(k-1)}$ is defined as the vertex with the highest function value in the simplex. The default value is $r = 0$. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can be terminated.

ABSGCONV= $r[n]$

ABSGTOL= $r[n]$

specifies an absolute gradient convergence criterion. Termination requires the maximum absolute gradient element to be small:

$$\max_j |g_j(\theta^{(k)})| \leq r$$

This criterion is not used by the NMSIMP technique. The default value is $r = 1\text{E} - 5$. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can be terminated.

ABSXCONV= $r[n]$

ABSXTOL= $r[n]$

specifies an absolute parameter convergence criterion. For all techniques except NMSIMP, termination requires a small Euclidean distance between successive parameter vectors,

$$\|\theta^{(k)} - \theta^{(k-1)}\|_2 \leq r$$

For the NMSIMP technique, termination requires either a small length $\alpha^{(k)}$ of the vertices of a restart simplex,

$$\alpha^{(k)} \leq r$$

or a small simplex size,

$$\delta^{(k)} \leq r$$

where the simplex size $\delta^{(k)}$ is defined as the L1 distance from the simplex vertex $\xi^{(k)}$ with the smallest function value to the other n simplex points $\theta_l^{(k)} \neq \xi^{(k)}$:

$$\delta^{(k)} = \sum_{\theta_l \neq y} \|\theta_l^{(k)} - \xi^{(k)}\|_1$$

The default is $r = 1\text{E} - 8$ for the NMSIMP technique and $r = 0$ otherwise. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can terminate.

DAMPSTEP[= r]

specifies that the initial step length value $\alpha^{(0)}$ for each line search (used by the QUANEW, HYQUAN, CONGRA, or NEWRAP technique) cannot be larger than r times the step length value used in the former iteration. If the DAMPSTEP option is specified but r is not specified, the default is $r = 2$. The DAMPSTEP= r option can prevent the line-search algorithm from repeatedly stepping into regions where some objective functions are difficult to compute or where they could lead to floating point overflows during the computation of objective functions and their derivatives. The DAMPSTEP= r option can save time-costly function calls during the line searches of objective functions that result in very small steps.

FCONV=r[n]**FTOL=r[n]**

specifies a relative function convergence criterion. For all techniques except NMSIMP, termination requires a small relative change of the function value in successive iterations,

$$\frac{|f(\theta^{(k)}) - f(\theta^{(k-1)})|}{\max(|f(\theta^{(k-1)})|, \text{FSIZE})} \leq r$$

where FSIZE is defined by the FSIZE= option. The same formula is used for the NMSIMP technique, but $\theta^{(k)}$ is defined as the vertex with the lowest function value, and $\theta^{(k-1)}$ is defined as the vertex with the highest function value in the simplex. The default value may depend on the procedure. In most cases, you can use the PALL option to find it.

FCONV2=r[n]**FTOL2=r[n]**

specifies another function convergence criterion.

For all techniques except NMSIMP, termination requires a small predicted reduction

$$df^{(k)} \approx f(\theta^{(k)}) - f(\theta^{(k)} + s^{(k)})$$

of the objective function. The predicted reduction

$$\begin{aligned} df^{(k)} &= -g^{(k)T} s^{(k)} - \frac{1}{2} s^{(k)T} H^{(k)} s^{(k)} \\ &= -\frac{1}{2} s^{(k)T} g^{(k)} \\ &\leq r \end{aligned}$$

is computed by approximating the objective function f by the first two terms of the Taylor series and substituting the Newton step

$$s^{(k)} = -[H^{(k)}]^{-1} g^{(k)}$$

For the NMSIMP technique, termination requires a small standard deviation of the function values of the $n + 1$ simplex vertices $\theta_l^{(k)}$, $l = 0, \dots, n$, $\sqrt{\frac{1}{n+1} \sum_l [f(\theta_l^{(k)}) - \bar{f}(\theta^{(k)})]^2} \leq r$ where $\bar{f}(\theta^{(k)}) = \frac{1}{n+1} \sum_l f(\theta_l^{(k)})$. If there are n_{act} boundary constraints active at $\theta^{(k)}$, the mean and standard deviation are computed only for the $n + 1 - n_{act}$ unconstrained vertices.

The default value is $r = 1\text{E} - 6$ for the NMSIMP technique and $r = 0$ otherwise. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can terminate.

FSIZE=r

specifies the FSIZE parameter of the relative function and relative gradient termination criteria. The default value is $r = 0$. For more details, see the FCONV= and GCONV= options.

GCONV=r[n]

GTOL= $r[n]$

specifies a relative gradient convergence criterion. For all techniques except CONGRA and NMSIMP, termination requires that the normalized predicted function reduction is small,

$$\frac{g(\theta^{(k)})^T [H^{(k)}]^{-1} g(\theta^{(k)})}{\max(|f(\theta^{(k)})|, \text{FSIZE})} \leq r$$

where FSIZE is defined by the FSIZE= option. For the CONGRA technique (where a reliable Hessian estimate H is not available), the following criterion is used:

$$\frac{\|g(\theta^{(k)})\|_2^2}{\|g(\theta^{(k)}) - g(\theta^{(k-1)})\|_2 \max(|f(\theta^{(k)})|, \text{FSIZE})} \leq r$$

This criterion is not used by the NMSIMP technique. The default value is $r = 1E - 8$. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can terminate.

HESCAL=0|1|2|3**HS=0|1|2|3**

specifies the scaling version of the Hessian matrix used in NRRIDG, TRUREG, NEWRAP, or DBLDOG optimization.

If HS is not equal to 0, the first iteration and each restart iteration sets the diagonal scaling matrix $D^{(0)} = \text{diag}(d_i^{(0)})$:

$$d_i^{(0)} = \sqrt{\max(|H_{i,i}^{(0)}|, \epsilon)}$$

where $H_{i,i}^{(0)}$ are the diagonal elements of the Hessian. In every other iteration, the diagonal scaling matrix $D^{(0)} = \text{diag}(d_i^{(0)})$ is updated depending on the HS option:

HS=0 specifies that no scaling is done.

HS=1 specifies the Moré (1978) scaling update:

$$d_i^{(k+1)} = \max \left[d_i^{(k)}, \sqrt{\max(|H_{i,i}^{(k)}|, \epsilon)} \right]$$

HS=2 specifies the Dennis, Gay, & Welsch (1981) scaling update:

$$d_i^{(k+1)} = \max \left[0.6 * d_i^{(k)}, \sqrt{\max(|H_{i,i}^{(k)}|, \epsilon)} \right]$$

HS=3 specifies that d_i is reset in each iteration:

$$d_i^{(k+1)} = \sqrt{\max(|H_{i,i}^{(k)}|, \epsilon)}$$

In each scaling update, ϵ is the relative machine precision. The default value is HS=0. Scaling of the Hessian can be time consuming in the case where general linear constraints are active.

INHESIAN[= r]**INHESS[= r]**

specifies how the initial estimate of the approximate Hessian is defined for the quasi-Newton techniques QUANEW and DBLDOG. There are two alternatives:

- If you do not use the r specification, the initial estimate of the approximate Hessian is set to the Hessian at $\theta^{(0)}$.
- If you do use the r specification, the initial estimate of the approximate Hessian is set to the multiple of the identity matrix rI .

By default, if you do not specify the option `INHESIAN= r` , the initial estimate of the approximate Hessian is set to the multiple of the identity matrix rI , where the scalar r is computed from the magnitude of the initial gradient.

INSTEP= r

reduces the length of the first trial step during the line search of the first iterations. For highly nonlinear objective functions, such as the EXP function, the default initial radius of the trust-region algorithm TRUREG or DBLDOG or the default step length of the line-search algorithms can result in arithmetic overflows. If this occurs, you should specify decreasing values of $0 < r < 1$ such as `INSTEP=1E-1`, `INSTEP=1E-2`, `INSTEP=1E-4`, and so on, until the iteration starts successfully.

- For trust-region algorithms (TRUREG, DBLDOG), the `INSTEP=` option specifies a factor $r > 0$ for the initial radius $\Delta^{(0)}$ of the trust region. The default initial trust-region radius is the length of the scaled gradient. This step corresponds to the default radius factor of $r = 1$.
- For line-search algorithms (NEWRAP, CONGRA, QUANEW), the `INSTEP=` option specifies an upper bound for the initial step length for the line search during the first five iterations. The default initial step length is $r = 1$.
- For the Nelder-Mead simplex algorithm, using `TECH=NMSIMP`, the `INSTEP= r` option defines the size of the start simplex.

LINESEARCH= i

LIS= i

specifies the line-search method for the CONGRA, QUANEW, and NEWRAP optimization techniques. Refer to Fletcher (1987) for an introduction to line-search techniques. The value of i can be $1, \dots, 8$. For CONGRA, QUANEW and NEWRAP, the default value is $i = 2$.

LIS=1	specifies a line-search method that needs the same number of function and gradient calls for cubic interpolation and cubic extrapolation; this method is similar to one used by the Harwell subroutine library.
LIS=2	specifies a line-search method that needs more function than gradient calls for quadratic and cubic interpolation and cubic extrapolation; this method is implemented as shown in Fletcher (1987) and can be modified to an exact line search by using the <code>LSPRECISION=</code> option.
LIS=3	specifies a line-search method that needs the same number of function and gradient calls for cubic interpolation and cubic extrapolation; this method is implemented as shown in Fletcher (1987) and can be modified to an exact line search by using the <code>LSPRECISION=</code> option.
LIS=4	specifies a line-search method that needs the same number of function and gradient calls for stepwise extrapolation and cubic interpolation.
LIS=5	specifies a line-search method that is a modified version of LIS=4.

LIS=6	specifies golden section line search (Polak 1971), which uses only function values for linear approximation.
LIS=7	specifies bisection line search (Polak 1971), which uses only function values for linear approximation.
LIS=8	specifies the Armijo line-search technique (Polak 1971), which uses only function values for linear approximation.

LSPRECISION=*r***LSP=*r***

specifies the degree of accuracy that should be obtained by the line-search algorithms LIS=2 and LIS=3. Usually an imprecise line search is inexpensive and successful. For more difficult optimization problems, a more precise and expensive line search may be necessary (Fletcher 1987). The second line-search method (which is the default for the NEWRAP, QUANEW, and CONGRA techniques) and the third line-search method approach exact line search for small LSPRECISION= values. If you have numerical problems, you should try to decrease the LSPRECISION= value to obtain a more precise line search. The default values are shown in the following table.

Table 6.2 Line Search Precision Defaults

TECH=	UPDATE=	LSP default
QUANEW	DBFGS, BFGS	$r = 0.4$
QUANEW	DDFP, DFP	$r = 0.06$
CONGRA	all	$r = 0.1$
NEWRAP	no update	$r = 0.9$

For more details, refer to Fletcher (1987).

MAXFUNC=*i***MAXFU=*i***

specifies the maximum number *i* of function calls in the optimization process. The default values are

- TRUREG, NRRIDG, NEWRAP: 125
- QUANEW, DBLDOG: 500
- CONGRA: 1000
- NMSIMP: 3000

Note that the optimization can terminate only after completing a full iteration. Therefore, the number of function calls that is actually performed can exceed the number that is specified by the MAXFUNC= option.

MAXITER=*i***MAXIT=*i***

specifies the maximum number *i* of iterations in the optimization process. The default values are

- TRUREG, NRRIDG, NEWRAP: 50
- QUANEW, DBLDOG: 200

- CONGRA: 400
- NMSIMP: 1000

These default values are also valid when i is specified as a missing value.

MAXSTEP= $r[n]$

specifies an upper bound for the step length of the line-search algorithms during the first n iterations. By default, r is the largest double-precision value and n is the largest integer available. Setting this option can improve the speed of convergence for the CONGRA, QUANEW, and NEWRAP techniques.

MAXTIME= r

specifies an upper limit of r seconds of CPU time for the optimization process. The default value is the largest floating-point double representation of your computer. Note that the time specified by the MAXTIME= option is checked only once at the end of each iteration. Therefore, the actual running time can be much longer than that specified by the MAXTIME= option. The actual running time includes the rest of the time needed to finish the iteration and the time needed to generate the output of the results.

MINITER= i

MINIT= i

specifies the minimum number of iterations. The default value is 0. If you request more iterations than are actually needed for convergence to a stationary point, the optimization algorithms can behave strangely. For example, the effect of rounding errors can prevent the algorithm from continuing for the required number of iterations.

NOPRINT

suppresses the output. (See procedure documentation for availability of this option.)

PALL

displays all optional output for optimization. (See procedure documentation for availability of this option.)

PHISTORY

displays the optimization history. (See procedure documentation for availability of this option.)

PHISTPARMS

display parameter estimates in each iteration. (See procedure documentation for availability of this option.)

PINIT

displays the initial values and derivatives (if available). (See procedure documentation for availability of this option.)

PSHORT

restricts the amount of default output. (See procedure documentation for availability of this option.)

PSUMMARY

restricts the amount of default displayed output to a short form of iteration history and notes, warnings, and errors. (See procedure documentation for availability of this option.)

RESTART= $i > 0$

REST= $i > 0$

specifies that the QUANEW or CONGRA algorithm is restarted with a steepest descent/ascent search direction after, at most, i iterations. Default values are as follows:

- CONGRA
UPDATE=PB: restart is performed automatically, i is not used.
- CONGRA
UPDATE \neq PB: $i = \min(10n, 80)$, where n is the number of parameters.
- QUANEW
 i is the largest integer available.

SOCKET=*fileref*

Specifies the *fileref* that contains the information needed for remote monitoring. See the section “[Remote Monitoring](#)” on page 184 for more details.

TECHNIQUE=*value*

TECH=*value*

specifies the optimization technique. Valid values are as follows:

- CONGRA
performs a conjugate-gradient optimization, which can be more precisely specified with the UPDATE= option and modified with the LINESEARCH= option. When you specify this option, UPDATE=PB by default.
- DBLDOG
performs a version of double-dogleg optimization, which can be more precisely specified with the UPDATE= option. When you specify this option, UPDATE=DBFGS by default.
- NMSIMP
performs a Nelder-Mead simplex optimization.
- NONE
does not perform any optimization. This option can be used as follows:
 - to perform a grid search without optimization
 - to compute estimates and predictions that cannot be obtained efficiently with any of the optimization techniques
- NEWRAP
performs a Newton-Raphson optimization that combines a line-search algorithm with ridging. The line-search algorithm LIS=2 is the default method.
- NRRIDG
performs a Newton-Raphson optimization with ridging.
- QUANEW
performs a quasi-Newton optimization, which can be defined more precisely with the UPDATE= option and modified with the LINESEARCH= option. This is the default estimation method.
- TRUREG
performs a trust region optimization.

UPDATE=method**UPD=method**

specifies the update method for the QUANEW, DBLDOG, or CONGRA optimization technique. Not every update method can be used with each optimizer.

Valid methods are as follows:

- **BFGS**
performs the original Broyden, Fletcher, Goldfarb, and Shanno (BFGS) update of the inverse Hessian matrix.
- **DBFGS**
performs the dual BFGS update of the Cholesky factor of the Hessian matrix. This is the default update method.
- **DDFP**
performs the dual Davidon, Fletcher, and Powell (DFP) update of the Cholesky factor of the Hessian matrix.
- **DFP**
performs the original DFP update of the inverse Hessian matrix.
- **PB**
performs the automatic restart update method of Powell (1977) and Beale (1972).
- **FR**
performs the Fletcher-Reeves update (Fletcher 1987).
- **PR**
performs the Polak-Ribiere update (Fletcher 1987).
- **CD**
performs a conjugate-descent update of Fletcher (1987).

XCONV=r[n]**XTOL=r[n]**

specifies the relative parameter convergence criterion. For all techniques except NMSIMP, termination requires a small relative parameter change in subsequent iterations.

$$\frac{\max_j |\theta_j^{(k)} - \theta_j^{(k-1)}|}{\max(|\theta_j^{(k)}|, |\theta_j^{(k-1)}|, \text{XSIZE})} \leq r$$

For the NMSIMP technique, the same formula is used, but $\theta_j^{(k)}$ is defined as the vertex with the lowest function value and $\theta_j^{(k-1)}$ is defined as the vertex with the highest function value in the simplex. The default value is $r = 1\text{E} - 8$ for the NMSIMP technique and $r = 0$ otherwise. The optional integer value n specifies the number of successive iterations for which the criterion must be satisfied before the process can be terminated.

XSIZE=r > 0

specifies the XSIZE parameter of the relative parameter termination criterion. The default value is $r = 0$. For more detail, see the XCONV= option.

Details of Optimization Algorithms

Overview

There are several optimization techniques available. You can choose a particular optimizer with the `TECH=name` option in the `PROC` statement or `NLOPTIONS` statement.

Table 6.3 Optimization Techniques

Algorithm	TECH=
trust region Method	TRUREG
Newton-Raphson method with line search	NEWRAP
Newton-Raphson method with ridging	NRRIDG
quasi-Newton methods (DBFGS, DDFP, BFGS, DFP)	QUANEW
double-dogleg method (DBFGS, DDFP)	DBLDOG
conjugate gradient methods (PB, FR, PR, CD)	CONGRA
Nelder-Mead simplex method	NMSIMP

No algorithm for optimizing general nonlinear functions exists that always finds the global optimum for a general nonlinear minimization problem in a reasonable amount of time. Since no single optimization technique is invariably superior to others, NLO provides a variety of optimization techniques that work well in various circumstances. However, you can devise problems for which none of the techniques in NLO can find the correct solution. Moreover, nonlinear optimization can be computationally expensive in terms of time and memory, so you must be careful when matching an algorithm to a problem.

All optimization techniques in NLO use $O(n^2)$ memory except the conjugate gradient methods, which use only $O(n)$ of memory and are designed to optimize problems with many parameters. These iterative techniques require repeated computation of the following:

- the function value (optimization criterion)
- the gradient vector (first-order partial derivatives)
- for some techniques, the (approximate) Hessian matrix (second-order partial derivatives)

However, since each of the optimizers requires different derivatives, some computational efficiencies can be gained. Table 6.4 shows, for each optimization technique, which derivatives are required. (*FOD* means that first-order derivatives or the gradient is computed; *SOD* means that second-order derivatives or the Hessian is computed.)

Table 6.4 Optimization Computations

Algorithm	FOD	SOD
TRUREG	x	x
NEWRAP	x	x
NRRIDG	x	x
QUANEW	x	-
DBLDOG	x	-
CONGRA	x	-
NMSIMP	-	-

Each optimization method employs one or more convergence criteria that determine when it has converged. The various termination criteria are listed and described in the previous section. An algorithm is considered to have converged when any one of the convergence criterion is satisfied. For example, under the default settings, the QUANEW algorithm will converge if $ABSGCONV < 1E - 5$, $FCONV < 10^{-FDIGITS}$, or $GCONV < 1E - 8$.

Choosing an Optimization Algorithm

The factors that go into choosing a particular optimization technique for a particular problem are complex and might involve trial and error.

For many optimization problems, computing the gradient takes more computer time than computing the function value, and computing the Hessian sometimes takes *much* more computer time and memory than computing the gradient, especially when there are many decision variables. Unfortunately, optimization techniques that do not use some kind of Hessian approximation usually require many more iterations than techniques that do use a Hessian matrix, and as a result the total run time of these techniques is often longer. Techniques that do not use the Hessian also tend to be less reliable. For example, they can more easily terminate at stationary points rather than at global optima.

A few general remarks about the various optimization techniques follow.

- The second-derivative methods TRUREG, NEWRAP, and NRRIDG are best for small problems where the Hessian matrix is not expensive to compute. Sometimes the NRRIDG algorithm can be faster than the TRUREG algorithm, but TRUREG can be more stable. The NRRIDG algorithm requires only one matrix with $n(n + 1)/2$ double words; TRUREG and NEWRAP require two such matrices.
- The first-derivative methods QUANEW and DBLDOG are best for medium-sized problems where the objective function and the gradient are much faster to evaluate than the Hessian. The QUANEW and DBLDOG algorithms, in general, require more iterations than TRUREG, NRRIDG, and NEWRAP, but each iteration can be much faster. The QUANEW and DBLDOG algorithms require only the gradient to update an approximate Hessian, and they require slightly less memory than TRUREG or NEWRAP (essentially one matrix with $n(n + 1)/2$ double words). QUANEW is the default optimization method.

- The first-derivative method CONGRA is best for large problems where the objective function and the gradient can be computed much faster than the Hessian and where too much memory is required to store the (approximate) Hessian. The CONGRA algorithm, in general, requires more iterations than QUANEW or DBLDOG, but each iteration can be much faster. Since CONGRA requires only a factor of n double-word memory, many large applications can be solved only by CONGRA.
- The no-derivative method NMSIMP is best for small problems where derivatives are not continuous or are very difficult to compute.

Algorithm Descriptions

Some details about the optimization techniques are as follows.

Trust Region Optimization (TRUEG)

The trust region method uses the gradient $g(\theta_{(k)})$ and the Hessian matrix $H(\theta_{(k)})$; thus, it requires that the objective function $f(\theta)$ have continuous first- and second-order derivatives inside the feasible region.

The trust region method iteratively optimizes a quadratic approximation to the nonlinear objective function within a hyperelliptic trust region with radius Δ that constrains the step size that corresponds to the quality of the quadratic approximation. The trust region method is implemented using Dennis, Gay, and Welsch (1981), Gay (1983), and Moré and Sorensen (1983).

The trust region method performs well for small- to medium-sized problems, and it does not need many function, gradient, and Hessian calls. However, if the computation of the Hessian matrix is computationally expensive, one of the (dual) quasi-Newton or conjugate gradient algorithms may be more efficient.

Newton-Raphson Optimization with Line Search (NEWRAP)

The NEWRAP technique uses the gradient $g(\theta_{(k)})$ and the Hessian matrix $H(\theta_{(k)})$; thus, it requires that the objective function have continuous first- and second-order derivatives inside the feasible region. If second-order derivatives are computed efficiently and precisely, the NEWRAP method can perform well for medium-sized to large problems, and it does not need many function, gradient, and Hessian calls.

This algorithm uses a pure Newton step when the Hessian is positive definite and when the Newton step reduces the value of the objective function successfully. Otherwise, a combination of ridging and line search is performed to compute successful steps. If the Hessian is not positive definite, a multiple of the identity matrix is added to the Hessian matrix to make it positive definite.

In each iteration, a line search is performed along the search direction to find an approximate optimum of the objective function. The default line-search method uses quadratic interpolation and cubic extrapolation (LIS=2).

Newton-Raphson Ridge Optimization (NRRIDG)

The NRRIDG technique uses the gradient $g(\theta_{(k)})$ and the Hessian matrix $H(\theta_{(k)})$; thus, it requires that the objective function have continuous first- and second-order derivatives inside the feasible region.

This algorithm uses a pure Newton step when the Hessian is positive definite and when the Newton step reduces the value of the objective function successfully. If at least one of these two conditions is not satisfied, a multiple of the identity matrix is added to the Hessian matrix.

The NRRIDG method performs well for small- to medium-sized problems, and it does not require many function, gradient, and Hessian calls. However, if the computation of the Hessian matrix is computationally expensive, one of the (dual) quasi-Newton or conjugate gradient algorithms might be more efficient.

Since the NRRIDG technique uses an orthogonal decomposition of the approximate Hessian, each iteration of NRRIDG can be slower than that of the NEWRAP technique, which works with Cholesky decomposition. Usually, however, NRRIDG requires fewer iterations than NEWRAP.

Quasi-Newton Optimization (QUANEW)

The (dual) quasi-Newton method uses the gradient $g(\theta_{(k)})$, and it does not need to compute second-order derivatives since they are approximated. It works well for medium to moderately large optimization problems where the objective function and the gradient are much faster to compute than the Hessian; but, in general, it requires more iterations than the TRUREG, NEWRAP, and NRRIDG techniques, which compute second-order derivatives. QUANEW is the default optimization algorithm because it provides an appropriate balance between the speed and stability required for most nonlinear mixed model applications.

The QUANEW technique is one of the following, depending upon the value of the UPDATE= option.

- the original quasi-Newton algorithm, which updates an approximation of the inverse Hessian
- the dual quasi-Newton algorithm, which updates the Cholesky factor of an approximate Hessian (default)

You can specify four update formulas with the UPDATE= option:

- DBFGS performs the dual Broyden, Fletcher, Goldfarb, and Shanno (BFGS) update of the Cholesky factor of the Hessian matrix. This is the default.
- DDFP performs the dual Davidon, Fletcher, and Powell (DFP) update of the Cholesky factor of the Hessian matrix.
- BFGS performs the original BFGS update of the inverse Hessian matrix.
- DFP performs the original DFP update of the inverse Hessian matrix.

In each iteration, a line search is performed along the search direction to find an approximate optimum. The default line-search method uses quadratic interpolation and cubic extrapolation to obtain a step size α satisfying the Goldstein conditions. One of the Goldstein conditions can be violated if the feasible region defines an upper limit of the step size. Violating the left-side Goldstein condition can affect the positive

definiteness of the quasi-Newton update. In that case, either the update is skipped or the iterations are restarted with an identity matrix, resulting in the steepest descent or ascent search direction. You can specify line-search algorithms other than the default with the LIS= option.

The QUANEW algorithm performs its own line-search technique. All options and parameters (except the INSTEP= option) that control the line search in the other algorithms do not apply here. In several applications, large steps in the first iterations are troublesome. You can use the INSTEP= option to impose an upper bound for the step size α during the first five iterations. You can also use the INHESSIAN[=r] option to specify a different starting approximation for the Hessian. If you specify only the INHESSIAN option, the Cholesky factor of a (possibly ridged) finite difference approximation of the Hessian is used to initialize the quasi-Newton update process. The values of the LCSINGULAR=, LCEPSILON=, and LCDEACT= options, which control the processing of linear and boundary constraints, are valid only for the quadratic programming subroutine used in each iteration of the QUANEW algorithm.

Double-Dogleg Optimization (DBLDOG)

The double-dogleg optimization method combines the ideas of the quasi-Newton and trust region methods. In each iteration, the double-dogleg algorithm computes the step $s^{(k)}$ as the linear combination of the steepest descent or ascent search direction $s_1^{(k)}$ and a quasi-Newton search direction $s_2^{(k)}$.

$$s^{(k)} = \alpha_1 s_1^{(k)} + \alpha_2 s_2^{(k)}$$

The step is requested to remain within a prespecified trust region radius; see Fletcher (1987, p. 107). Thus, the DBLDOG subroutine uses the dual quasi-Newton update but does not perform a line search. You can specify two update formulas with the UPDATE= option:

- DBFGS performs the dual Broyden, Fletcher, Goldfarb, and Shanno update of the Cholesky factor of the Hessian matrix. This is the default.
- DDFP performs the dual Davidon, Fletcher, and Powell update of the Cholesky factor of the Hessian matrix.

The double-dogleg optimization technique works well for medium to moderately large optimization problems where the objective function and the gradient are much faster to compute than the Hessian. The implementation is based on Dennis and Mei (1979) and Gay (1983), but it is extended for dealing with boundary and linear constraints. The DBLDOG technique generally requires more iterations than the TRUREG, NEWRAP, or NRRIDG technique, which requires second-order derivatives; however, each of the DBLDOG iterations is computationally cheap. Furthermore, the DBLDOG technique requires only gradient calls for the update of the Cholesky factor of an approximate Hessian.

Conjugate Gradient Optimization (CONGRA)

Second-order derivatives are not required by the CONGRA algorithm and are not even approximated. The CONGRA algorithm can be expensive in function and gradient calls, but it requires only $O(n)$ memory for unconstrained optimization. In general, many iterations are required to obtain a precise solution, but each of the CONGRA iterations is computationally cheap. You can specify four different update formulas for generating the conjugate directions by using the UPDATE= option:

- PB performs the automatic restart update method of Powell (1977) and Beale (1972). This is the default.
- FR performs the Fletcher-Reeves update (Fletcher 1987).
- PR performs the Polak-Ribiere update (Fletcher 1987).
- CD performs a conjugate-descent update of Fletcher (1987).

The default, UPDATE=PB, behaved best in most test examples. You are advised to avoid the option UPDATE=CD, which behaved worst in most test examples.

The CONGRA subroutine should be used for optimization problems with large n . For the unconstrained or boundary constrained case, CONGRA requires only $O(n)$ bytes of working memory, whereas all other optimization methods require order $O(n^2)$ bytes of working memory. During n successive iterations, uninterrupted by restarts or changes in the working set, the conjugate gradient algorithm computes a cycle of n conjugate search directions. In each iteration, a line search is performed along the search direction to find an approximate optimum of the objective function. The default line-search method uses quadratic interpolation and cubic extrapolation to obtain a step size α satisfying the Goldstein conditions. One of the Goldstein conditions can be violated if the feasible region defines an upper limit for the step size. Other line-search algorithms can be specified with the LIS= option.

Nelder-Mead Simplex Optimization (NMSIMP)

The Nelder-Mead simplex method does not use any derivatives and does not assume that the objective function has continuous derivatives. The objective function itself needs to be continuous. This technique is quite expensive in the number of function calls, and it might be unable to generate precise results for n much greater than 40.

The original Nelder-Mead simplex algorithm is implemented and extended to boundary constraints. This algorithm does not compute the objective for infeasible points, but it changes the shape of the simplex by adapting to the nonlinearities of the objective function, which contributes to an increased speed of convergence. It uses a special termination criteria.

Remote Monitoring

The SAS/EmMonitor is an application for Windows that enables you to monitor and stop from your PC a CPU-intensive application performed by the NLO subsystem that runs on a remote server.

On the server side, a FILENAME statement assigns a fileref to a SOCKET-type device that defines the IP address of the client and the port number for listening. The fileref is then specified in the SOCKET= option in the PROC statement to control the EmMonitor. The following statements show an example of server-side statements for PROC ENTROPY.

```
data one;
  do t = 1 to 10;
```

```

    x1 = 5 * ranuni(456);
    x2 = 10 * ranuni( 456);
    x3 = 2 * rannor(1456);
    e1 = rannor(1456);
    e2 = rannor(4560);
    tmp1 = 0.5 * e1 - 0.1 * e2;
    tmp2 = -0.1 * e1 - 0.3 * e2;
    y1 = 7 + 8.5*x1 + 2*x2 + tmp1;
    y2 = -3 + -2*x1 + x2 + 3*x3 + tmp2;
    output;
end;
run;

filename sock socket 'your.pc.address.com:6943';

proc entropy data=one tech=tr gmenm gconv=2.e-5 socket=sock;
    model y1 = x1 x2 x3;
run;

```

On the client side, the EmMonitor application is started with the following syntax:

EmMonitor *options*

The options are:

- p port_number** defines the port number
- t title** defines the title of the EmMonitor window
- k** keeps the monitor alive when the iteration is completed

The default port number is 6943.

The server does not need to be running when you start the EmMonitor, and you can start or dismiss the server at any time during the iteration process. You only need to remember the port number.

Starting the PC client, or closing it prematurely, does not have any effect on the server side. In other words, the iteration process continues until one of the criteria for termination is met.

Figure 6.1 through Figure 6.4 show screenshots of the application on the client side.

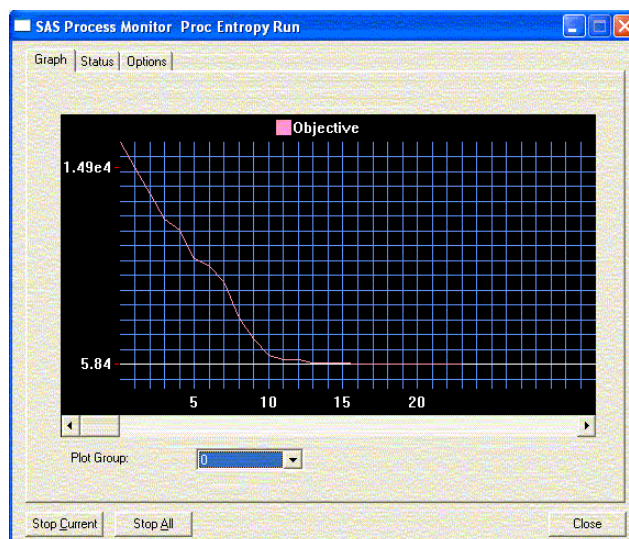
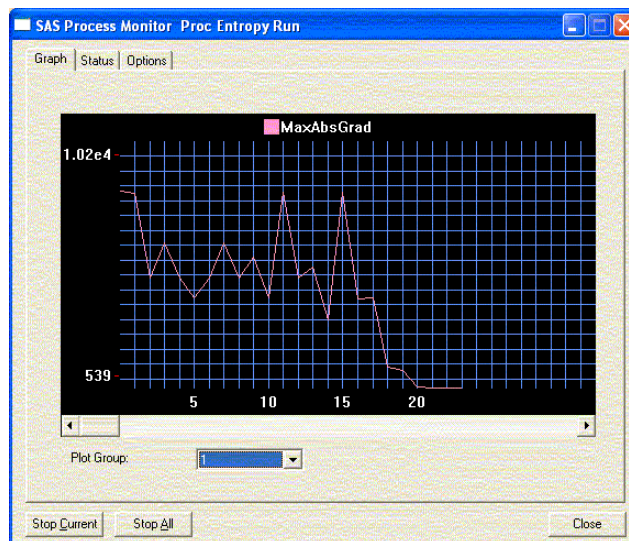
Figure 6.1 Graph Tab Group 0**Figure 6.2** Graph Tab Group 1

Figure 6.3 Status Tab

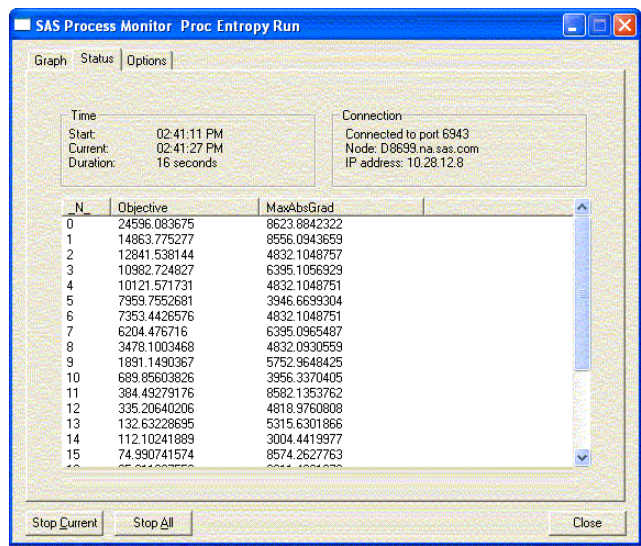
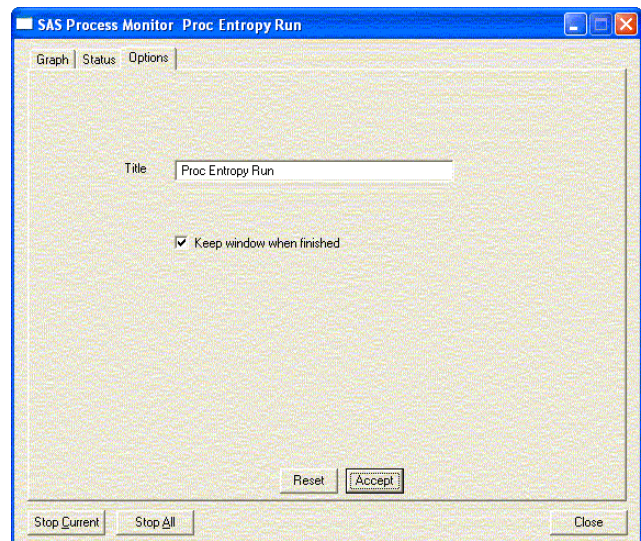


Figure 6.4 Options Tab



ODS Table Names

The NLO subsystem assigns a name to each table it creates. You can use these names when using the Output Delivery System (ODS) to select tables and create output data sets. Not all tables are created by all SAS/ETS procedures that use the NLO subsystem. You should check the procedure chapter for more details. The names are listed in the following table.

Table 6.5 ODS Tables Produced by the NLO Subsystem

ODS Table Name	Description
ConvergenceStatus	Convergence status
InputOptions	Input options
IterHist	Iteration history
IterStart	Iteration start
IterStop	Iteration stop
Lagrange	Lagrange multipliers at the solution
LinCon	Linear constraints
LinConDel	Deleted linear constraints
LinConSol	Linear constraints at the solution
ParameterEstimatesResults	Estimates at the results
ParameterEstimatesStart	Estimates at the start of the iterations
ProblemDescription	Problem description
ProjGrad	Projected gradients

References

- Beale, E.M.L. (1972), “A Derivation of Conjugate Gradients,” in *Numerical Methods for Nonlinear Optimization*, ed. F.A. Lootsma, London: Academic Press.
- Dennis, J.E., Gay, D.M., and Welsch, R.E. (1981), “An Adaptive Nonlinear Least-Squares Algorithm,” *ACM Transactions on Mathematical Software*, 7, 348–368.
- Dennis, J.E. and Mei, H.H.W. (1979), “Two New Unconstrained Optimization Algorithms Which Use Function and Gradient Values,” *J. Optim. Theory Appl.*, 28, 453–482.
- Dennis, J.E. and Schnabel, R.B. (1983), *Numerical Methods for Unconstrained Optimization and Nonlinear Equations*, Englewood, NJ: Prentice-Hall.
- Fletcher, R. (1987), *Practical Methods of Optimization*, Second Edition, Chichester: John Wiley & Sons, Inc.
- Gay, D.M. (1983), “Subroutines for Unconstrained Minimization,” *ACM Transactions on Mathematical Software*, 9, 503–524.
- Moré, J.J. (1978), “The Levenberg-Marquardt Algorithm: Implementation and Theory,” in *Lecture Notes in Mathematics 630*, ed. G.A. Watson, Berlin-Heidelberg-New York: Springer Verlag.
- Moré, J.J. and Sorensen, D.C. (1983), “Computing a Trust-region Step,” *SIAM Journal on Scientific and Statistical Computing*, 4, 553–572.
- Polak, E. (1971), *Computational Methods in Optimization*, New York: Academic Press.
- Powell, J.M.D. (1977), “Restart Procedures for the Conjugate Gradient Method,” *Math. Prog.*, 12, 241–254.

Part II

Procedure Reference

Chapter 7

The ARIMA Procedure

Contents

Overview: ARIMA Procedure	194
Getting Started: ARIMA Procedure	195
The Three Stages of ARIMA Modeling	195
Identification Stage	196
Estimation and Diagnostic Checking Stage	201
Forecasting Stage	207
Using ARIMA Procedure Statements	209
General Notation for ARIMA Models	210
Stationarity	213
Differencing	213
Subset, Seasonal, and Factored ARMA Models	214
Input Variables and Regression with ARMA Errors	216
Intervention Models and Interrupted Time Series	219
Rational Transfer Functions and Distributed Lag Models	220
Forecasting with Input Variables	222
Data Requirements	224
Syntax: ARIMA Procedure	224
Functional Summary	224
PROC ARIMA Statement	227
BY Statement	230
IDENTIFY Statement	230
ESTIMATE Statement	234
OUTLIER Statement	238
FORECAST Statement	240
Details: ARIMA Procedure	241
The Inverse Autocorrelation Function	241
The Partial Autocorrelation Function	242
The Cross-Correlation Function	242
The ESACF Method	243
The MINIC Method	245
The SCAN Method	246
Stationarity Tests	248
Prewhitening	248
Identifying Transfer Function Models	249

Missing Values and Autocorrelations	250
Estimation Details	250
Specifying Inputs and Transfer Functions	255
Initial Values	256
Stationarity and Invertibility	257
Naming of Model Parameters	258
Missing Values and Estimation and Forecasting	258
Forecasting Details	259
Forecasting Log Transformed Data	260
Specifying Series Periodicity	261
Detecting Outliers	262
OUT= Data Set	264
OUTCOV= Data Set	265
OUTEST= Data Set	266
OUTMODEL= SAS Data Set	268
OUTSTAT= Data Set	269
Printed Output	270
ODS Table Names	273
Statistical Graphics	274
Examples: ARIMA Procedure	278
Example 7.1: Simulated IMA Model	278
Example 7.2: Seasonal Model for the Airline Series	283
Example 7.3: Model for Series J Data from Box and Jenkins	290
Example 7.4: An Intervention Model for Ozone Data	299
Example 7.5: Using Diagnostics to Identify ARIMA Models	301
Example 7.6: Detection of Level Changes in the Nile River Data	306
Example 7.7: Iterative Outlier Detection	308
References	310

Overview: ARIMA Procedure

The ARIMA procedure analyzes and forecasts equally spaced univariate time series data, transfer function data, and intervention data by using the autoregressive integrated moving-average (ARIMA) or autoregressive moving-average (ARMA) model. An ARIMA model predicts a value in a response time series as a linear combination of its own past values, past errors (also called shocks or innovations), and current and past values of other time series.

The ARIMA approach was first popularized by Box and Jenkins, and ARIMA models are often referred to as Box-Jenkins models. The general transfer function model employed by the ARIMA procedure was discussed by Box and Tiao (1975). When an ARIMA model includes other time series as input variables, the model is sometimes referred to as an ARIMAX model. Pankratz (1991) refers to the ARIMAX model as *dynamic regression*.

The ARIMA procedure provides a comprehensive set of tools for univariate time series model identification, parameter estimation, and forecasting, and it offers great flexibility in the kinds of ARIMA or ARIMAX models that can be analyzed. The ARIMA procedure supports seasonal, subset, and factored ARIMA models; intervention or interrupted time series models; multiple regression analysis with ARMA errors; and rational transfer function models of any complexity.

The design of PROC ARIMA closely follows the Box-Jenkins strategy for time series modeling with features for the identification, estimation and diagnostic checking, and forecasting steps of the Box-Jenkins method.

Before you use PROC ARIMA, you should be familiar with Box-Jenkins methods, and you should exercise care and judgment when you use the ARIMA procedure. The ARIMA class of time series models is complex and powerful, and some degree of expertise is needed to use them correctly.

Getting Started: ARIMA Procedure

This section outlines the use of the ARIMA procedure and gives a cursory description of the ARIMA modeling process for readers who are less familiar with these methods.

The Three Stages of ARIMA Modeling

The analysis performed by PROC ARIMA is divided into three stages, corresponding to the stages described by Box and Jenkins (1976).

1. In the *identification* stage, you use the IDENTIFY statement to specify the response series and identify candidate ARIMA models for it. The IDENTIFY statement reads time series that are to be used in later statements, possibly differencing them, and computes autocorrelations, inverse autocorrelations, partial autocorrelations, and cross-correlations. Stationarity tests can be performed to determine if differencing is necessary. The analysis of the IDENTIFY statement output usually suggests one or more ARIMA models that could be fit. Options enable you to test for stationarity and tentative ARMA order identification.
2. In the *estimation and diagnostic checking* stage, you use the ESTIMATE statement to specify the ARIMA model to fit to the variable specified in the previous IDENTIFY statement and to estimate the parameters of that model. The ESTIMATE statement also produces diagnostic statistics to help you judge the adequacy of the model.

Significance tests for parameter estimates indicate whether some terms in the model might be unnecessary. Goodness-of-fit statistics aid in comparing this model to others. Tests for white noise residuals indicate whether the residual series contains additional information that might be used by a more complex model. The OUTLIER statement provides another useful tool to check whether the currently estimated model accounts for all the variation in the series. If the diagnostic tests indicate problems with the model, you try another model and then repeat the estimation and diagnostic checking stage.

3. In the *forecasting* stage, you use the FORECAST statement to forecast future values of the time series and to generate confidence intervals for these forecasts from the ARIMA model produced by the preceding ESTIMATE statement.

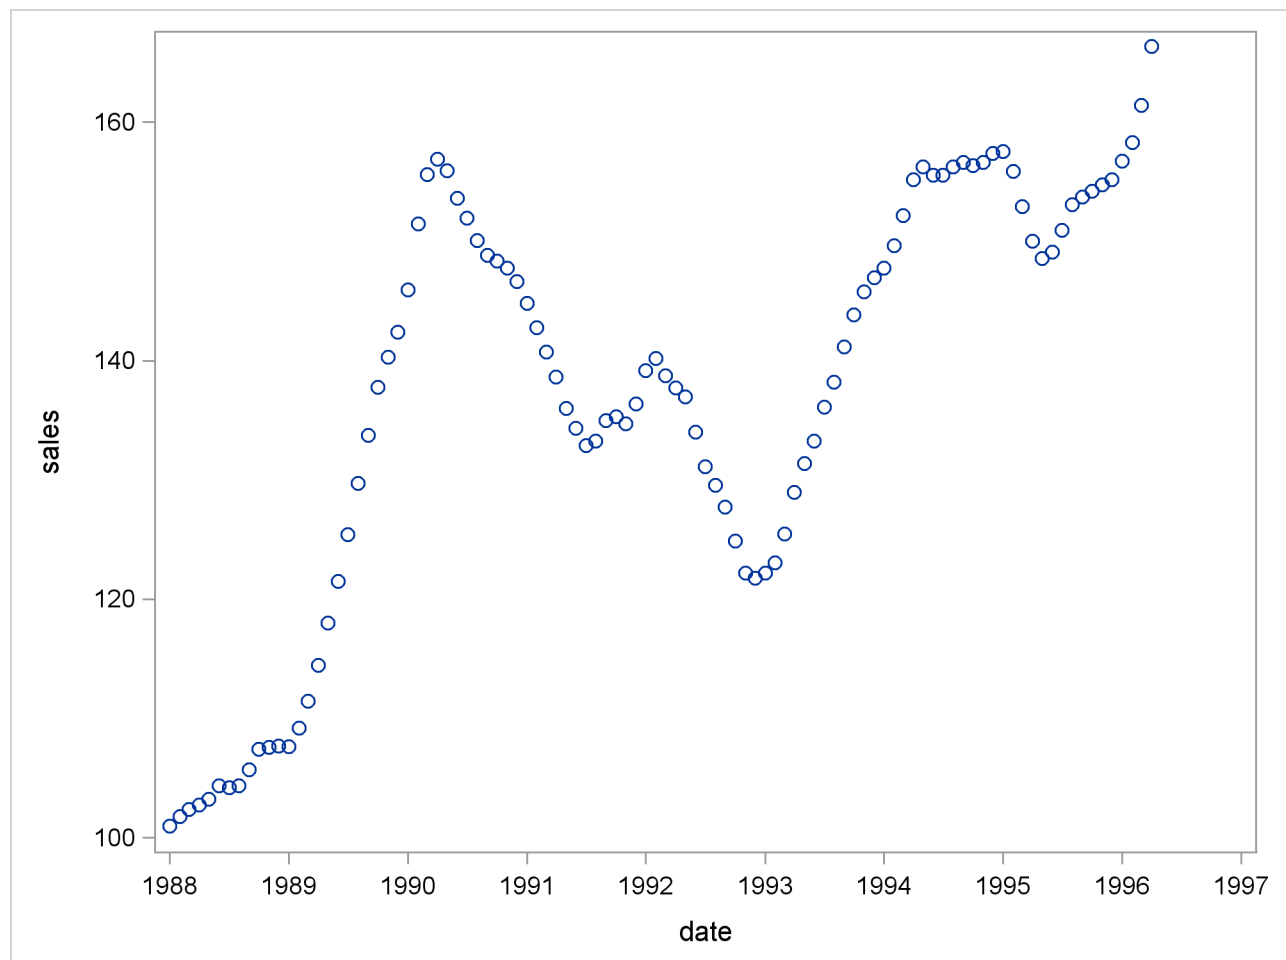
These three steps are explained further and illustrated through an extended example in the following sections.

Identification Stage

Suppose you have a variable called SALES that you want to forecast. The following example illustrates ARIMA modeling and forecasting by using a simulated data set TEST that contains a time series SALES generated by an ARIMA(1,1,1) model. The output produced by this example is explained in the following sections. The simulated SALES series is shown in Figure 7.1.

```
proc sgplot data=test;
  scatter y=sales x=date;
run;
```

Figure 7.1 Simulated ARIMA(1,1,1) Series SALES



Using the IDENTIFY Statement

You first specify the input data set in the PROC ARIMA statement. Then, you use an IDENTIFY statement to read in the SALES series and analyze its correlation properties. You do this by using the following statements:

```
proc arima data=test ;
  identify var=sales nlag=24;
run;
```

Descriptive Statistics

The IDENTIFY statement first prints descriptive statistics for the SALES series. This part of the IDENTIFY statement output is shown in [Figure 7.2](#).

Figure 7.2 IDENTIFY Statement Descriptive Statistics Output

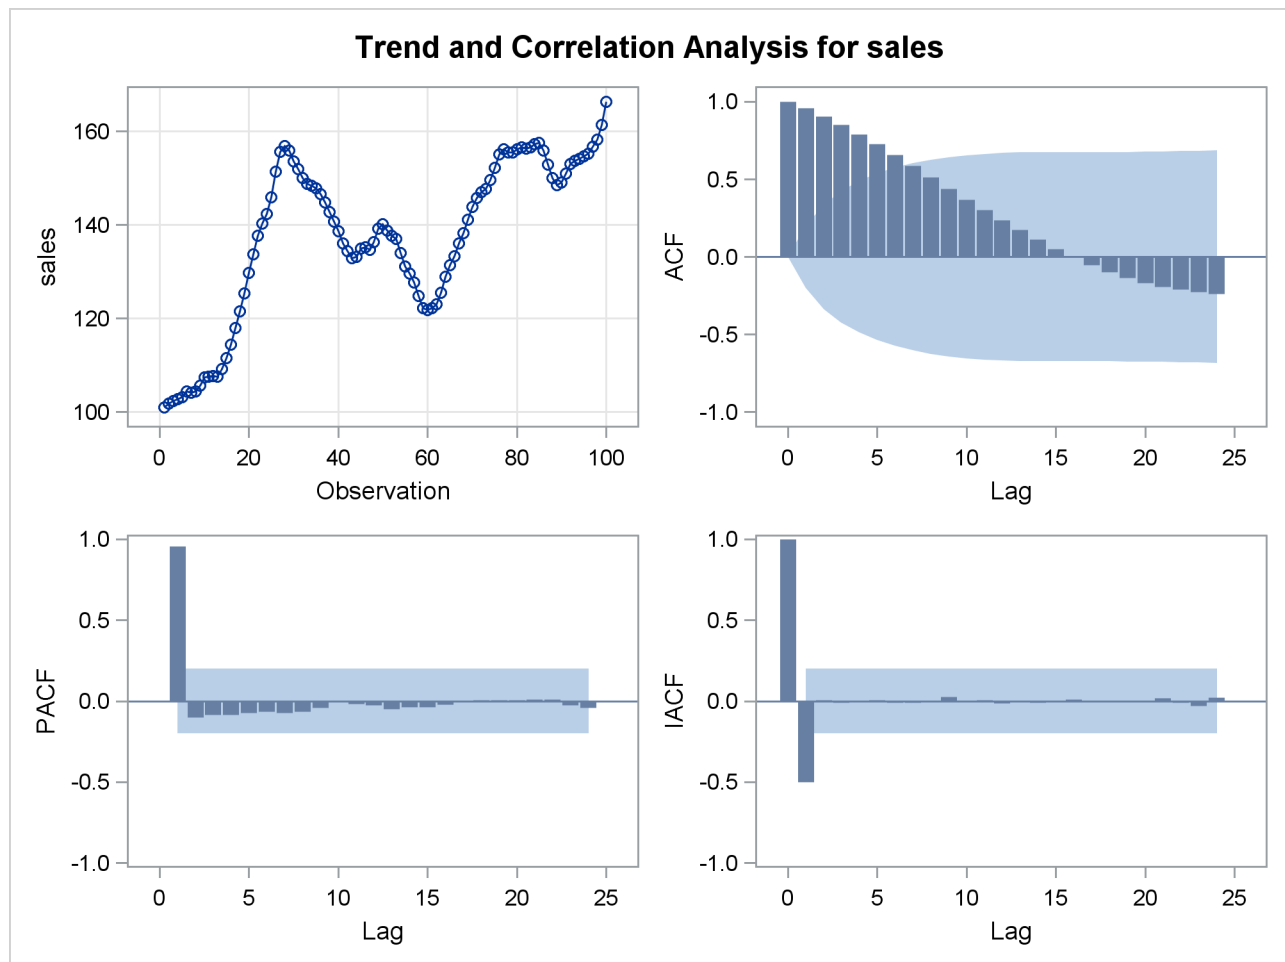
The ARIMA Procedure	
Name of Variable = sales	
Mean of Working Series	137.3662
Standard Deviation	17.36385
Number of Observations	100

Autocorrelation Function Plots

The IDENTIFY statement next produces a panel of plots used for its autocorrelation and trend analysis. The panel contains the following plots:

- the time series plot of the series
- the sample autocorrelation function plot (ACF)
- the sample inverse autocorrelation function plot (IACF)
- the sample partial autocorrelation function plot (PACF)

This correlation analysis panel is shown in [Figure 7.3](#).

Figure 7.3 Correlation Analysis of SALES

These autocorrelation function plots show the degree of correlation with past values of the series as a function of the number of periods in the past (that is, the lag) at which the correlation is computed.

The `NLAG=` option controls the number of lags for which the autocorrelations are shown. By default, the autocorrelation functions are plotted to lag 24.

Most books on time series analysis explain how to interpret the autocorrelation and the partial autocorrelation plots. See the section “[The Inverse Autocorrelation Function](#)” on page 241 for a discussion of the inverse autocorrelation plots.

By examining these plots, you can judge whether the series is *stationary* or *nonstationary*. In this case, a visual inspection of the autocorrelation function plot indicates that the `SALES` series is nonstationary, since the ACF decays very slowly. For more formal stationarity tests, use the `STATIONARITY=` option. (See the section “[Stationarity](#)” on page 213.)

White Noise Test

The last part of the default `IDENTIFY` statement output is the check for white noise. This is an approximate statistical test of the hypothesis that none of the autocorrelations of the series up to a given lag are signifi-

cantly different from 0. If this is true for all lags, then there is no information in the series to model, and no ARIMA model is needed for the series.

The autocorrelations are checked in groups of six, and the number of lags checked depends on the NLAG= option. The check for white noise output is shown in Figure 7.4.

Figure 7.4 IDENTIFY Statement Check for White Noise

Autocorrelation Check for White Noise									
To Lag	Chi- Square	DF	Pr > ChiSq	-----Autocorrelations-----					
6	426.44	6	<.0001	0.957	0.907	0.852	0.791	0.726	0.659
12	547.82	12	<.0001	0.588	0.514	0.440	0.370	0.303	0.238
18	554.70	18	<.0001	0.174	0.112	0.052	-0.004	-0.054	-0.098
24	585.73	24	<.0001	-0.135	-0.167	-0.192	-0.211	-0.227	-0.240

In this case, the white noise hypothesis is rejected very strongly, which is expected since the series is nonstationary. The p -value for the test of the first six autocorrelations is printed as <0.0001, which means the p -value is less than 0.0001.

Identification of the Differenced Series

Since the series is nonstationary, the next step is to transform it to a stationary series by differencing. That is, instead of modeling the SALES series itself, you model the change in SALES from one period to the next. To difference the SALES series, use another IDENTIFY statement and specify that the first difference of SALES be analyzed, as shown in the following statements:

```
proc arima data=test;
  identify var=sales(1);
run;
```

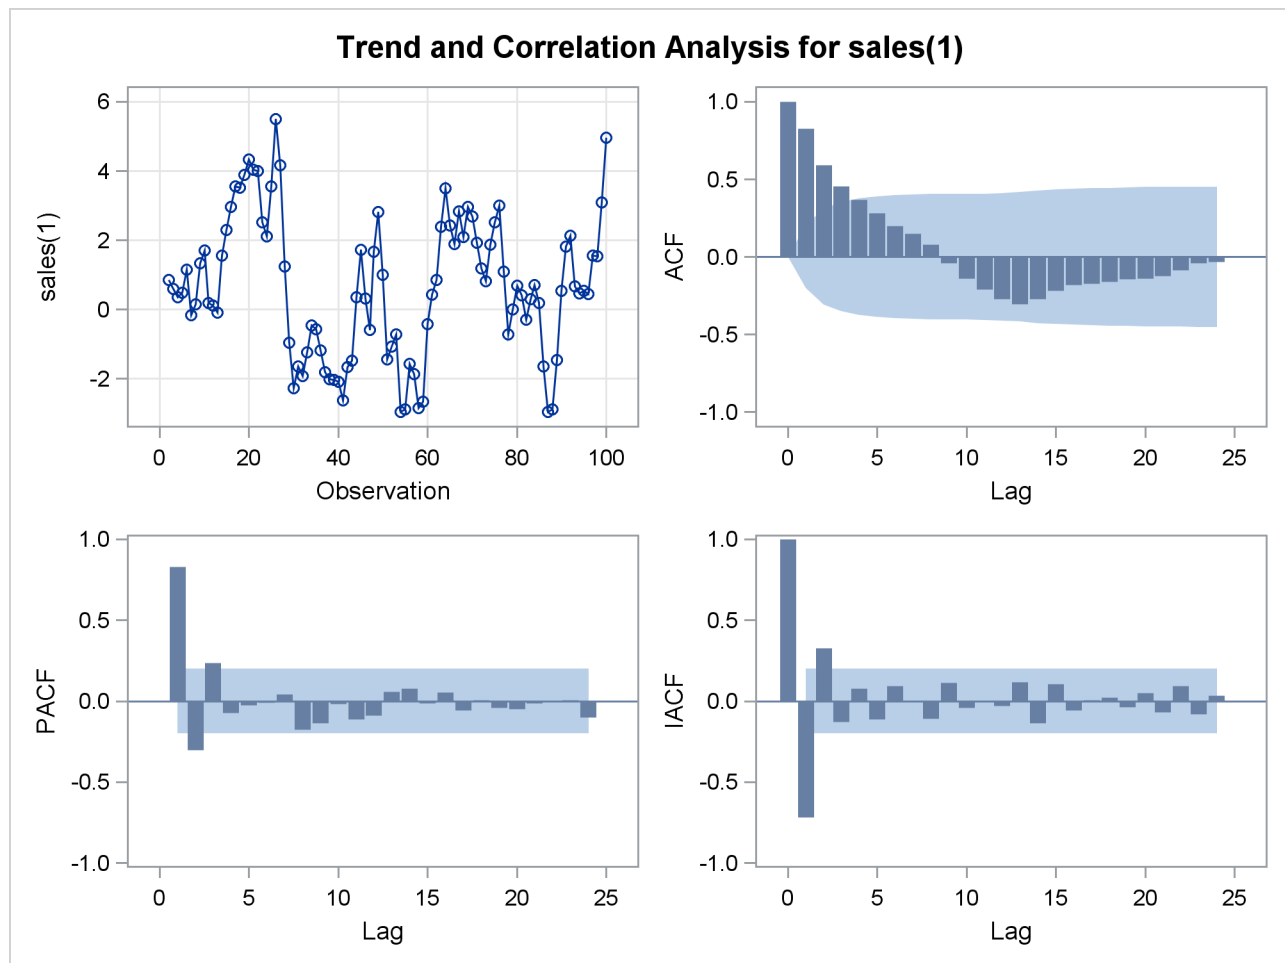
The second IDENTIFY statement produces the same information as the first, but for the change in SALES from one period to the next rather than for the total SALES in each period. The summary statistics output from this IDENTIFY statement is shown in Figure 7.5. Note that the period of differencing is given as 1, and one observation was lost through the differencing operation.

Figure 7.5 IDENTIFY Statement Output for Differenced Series

The ARIMA Procedure	
Name of Variable = sales	
Period(s) of Differencing	1
Mean of Working Series	0.660589
Standard Deviation	2.011543
Number of Observations	99
Observation(s) eliminated by differencing	1

The autocorrelation plots for the differenced series are shown in Figure 7.6.

Figure 7.6 Correlation Analysis of the Change in SALES



The autocorrelations decrease rapidly in this plot, indicating that the change in SALES is a stationary time series.

The next step in the Box-Jenkins methodology is to examine the patterns in the autocorrelation plot to choose candidate ARMA models to the series. The partial and inverse autocorrelation function plots are also useful aids in identifying appropriate ARMA models for the series.

In the usual Box-Jenkins approach to ARIMA modeling, the sample autocorrelation function, inverse autocorrelation function, and partial autocorrelation function are compared with the theoretical correlation functions expected from different kinds of ARMA models. This matching of theoretical autocorrelation functions of different ARMA models to the sample autocorrelation functions computed from the response series is the heart of the identification stage of Box-Jenkins modeling. Most textbooks on time series analysis, such as Pankratz (1983), discuss the theoretical autocorrelation functions for different kinds of ARMA models.

Since the input data are only a limited sample of the series, the sample autocorrelation functions computed from the input series only approximate the true autocorrelation function of the process that generates the

series. This means that the sample autocorrelation functions do not exactly match the theoretical autocorrelation functions for any ARMA model and can have a pattern similar to that of several different ARMA models. If the series is white noise (a purely random process), then there is no need to fit a model. The check for white noise, shown in [Figure 7.7](#), indicates that the change in SALES is highly autocorrelated. Thus, an autocorrelation model, for example an AR(1) model, might be a good candidate model to fit to this process.

Figure 7.7 IDENTIFY Statement Check for White Noise

Autocorrelation Check for White Noise									
To Lag	Chi- Square	DF	Pr > ChiSq	-----Autocorrelations-----					
6	154.44	6	<.0001	0.828	0.591	0.454	0.369	0.281	0.198
12	173.66	12	<.0001	0.151	0.081	-0.039	-0.141	-0.210	-0.274
18	209.64	18	<.0001	-0.305	-0.271	-0.218	-0.183	-0.174	-0.161
24	218.04	24	<.0001	-0.144	-0.141	-0.125	-0.085	-0.040	-0.032

Estimation and Diagnostic Checking Stage

The autocorrelation plots for this series, as shown in the previous section, suggest an AR(1) model for the change in SALES. You should check the diagnostic statistics to see if the AR(1) model is adequate. Other candidate models include an MA(1) model and low-order mixed ARMA models. In this example, the AR(1) model is tried first.

Estimating an AR(1) Model

The following statements fit an AR(1) model (an autoregressive model of order 1), which predicts the change in SALES as an average change, plus some fraction of the previous change, plus a random error. To estimate an AR model, you specify the order of the autoregressive model with the P= option in an ESTIMATE statement:

```
estimate p=1;
run;
```

The ESTIMATE statement fits the model to the data and prints parameter estimates and various diagnostic statistics that indicate how well the model fits the data. The first part of the ESTIMATE statement output, the table of parameter estimates, is shown in [Figure 7.8](#).

Figure 7.8 Parameter Estimates for AR(1) Model

The ARIMA Procedure					
Conditional Least Squares Estimation					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag
MU	0.90280	0.65984	1.37	0.1744	0
AR1,1	0.86847	0.05485	15.83	<.0001	1

The table of parameter estimates is titled “Conditional Least Squares Estimation,” which indicates the estimation method used. You can request different estimation methods with the `METHOD=` option.

The table of parameter estimates lists the parameters in the model; for each parameter, the table shows the estimated value and the standard error and t value for the estimate. The table also indicates the lag at which the parameter appears in the model.

In this case, there are two parameters in the model. The mean term is labeled MU; its estimated value is 0.90280. The autoregressive parameter is labeled AR1,1; this is the coefficient of the lagged value of the change in SALES, and its estimate is 0.86847.

The t values provide significance tests for the parameter estimates and indicate whether some terms in the model might be unnecessary. In this case, the t value for the autoregressive parameter is 15.83, so this term is highly significant. The t value for MU indicates that the mean term adds little to the model.

The standard error estimates are based on large sample theory. Thus, the standard errors are labeled as approximate, and the standard errors and t values might not be reliable in small samples.

The next part of the ESTIMATE statement output is a table of goodness-of-fit statistics, which aid in comparing this model to other models. This output is shown in [Figure 7.9](#).

Figure 7.9 Goodness-of-Fit Statistics for AR(1) Model

Constant Estimate	0.118749
Variance Estimate	1.15794
Std Error Estimate	1.076076
AIC	297.4469
SBC	302.6372
Number of Residuals	99

The “Constant Estimate” is a function of the mean term MU and the autoregressive parameters. This estimate is computed only for AR or ARMA models, but not for strictly MA models. See the section “[General Notation for ARIMA Models](#)” on page 210 for an explanation of the constant estimate.

The “Variance Estimate” is the variance of the residual series, which estimates the innovation variance. The item labeled “Std Error Estimate” is the square root of the variance estimate. In general, when you are comparing candidate models, smaller AIC and SBC statistics indicate the better fitting model. The section “[Estimation Details](#)” on page 250 explains the AIC and SBC statistics.

The ESTIMATE statement next prints a table of correlations of the parameter estimates, as shown in [Figure 7.10](#). This table can help you assess the extent to which collinearity might have influenced the results. If two parameter estimates are very highly correlated, you might consider dropping one of them from the model.

Figure 7.10 Correlations of the Estimates for AR(1) Model

Correlations of Parameter Estimates		
Parameter	MU	AR1, 1
MU	1.000	0.114
AR1, 1	0.114	1.000

The next part of the ESTIMATE statement output is a check of the autocorrelations of the residuals. This output has the same form as the autocorrelation check for white noise that the IDENTIFY statement prints for the response series. The autocorrelation check of residuals is shown in [Figure 7.11](#).

Figure 7.11 Check for White Noise Residuals for AR(1) Model

Autocorrelation Check of Residuals									
To Lag	Chi- Square	DF	Pr > ChiSq	-----Autocorrelations-----					
6	19.09	5	0.0019	0.327	-0.220	-0.128	0.068	-0.002	-0.096
12	22.90	11	0.0183	0.072	0.116	-0.042	-0.066	0.031	-0.091
18	31.63	17	0.0167	-0.233	-0.129	-0.024	0.056	-0.014	-0.008
24	32.83	23	0.0841	0.009	-0.057	-0.057	-0.001	0.049	-0.015

The χ^2 test statistics for the residuals series indicate whether the residuals are uncorrelated (white noise) or contain additional information that might be used by a more complex model. In this case, the test statistics reject the no-autocorrelation hypothesis at a high level of significance ($p = 0.0019$ for the first six lags.) This means that the residuals are not white noise, and so the AR(1) model is not a fully adequate model for this series. The ESTIMATE statement output also includes graphical analysis of the residuals. It is not shown here. The graphical analysis also reveals the inadequacy of the AR(1) model.

The final part of the ESTIMATE statement output is a listing of the estimated model, using the backshift notation. This output is shown in [Figure 7.12](#).

Figure 7.12 Estimated ARIMA(1, 1, 0) Model for SALES

Model for variable sales	
Estimated Mean	0.902799
Period(s) of Differencing	1

Figure 7.12 *continued*

Autoregressive Factors					
Factor 1: 1 - 0.86847 B** (1)					

This listing combines the differencing specification given in the IDENTIFY statement with the parameter estimates of the model for the change in SALES. Since the AR(1) model is for the change in SALES, the final model for SALES is an ARIMA(1,1,0) model. Using B , the backshift operator, the mathematical form of the estimated model shown in this output is as follows:

$$(1 - B)sales_t = 0.902799 + \frac{1}{(1 - 0.86847B)}a_t$$

See the section “General Notation for ARIMA Models” on page 210 for further explanation of this notation.

Estimating an ARMA(1,1) Model

The IDENTIFY statement plots suggest a mixed autoregressive and moving-average model, and the previous ESTIMATE statement check of residuals indicates that an AR(1) model is not sufficient. You now try estimating an ARMA(1,1) model for the change in SALES.

An ARMA(1,1) model predicts the change in SALES as an average change, plus some fraction of the previous change, plus a random error, plus some fraction of the random error in the preceding period. An ARMA(1,1) model for the change in SALES is the same as an ARIMA(1,1,1) model for the level of SALES.

To estimate a mixed autoregressive moving-average model, you specify the order of the moving-average part of the model with the Q= option in an ESTIMATE statement in addition to specifying the order of the autoregressive part with the P= option. The following statements fit an ARMA(1,1) model to the differenced SALES series:

```
estimate p=1 q=1;
run;
```

The parameter estimates table and goodness-of-fit statistics for this model are shown in Figure 7.13.

Figure 7.13 Estimated ARMA(1, 1) Model for Change in SALES

The ARIMA Procedure					
Conditional Least Squares Estimation					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag
MU	0.89288	0.49391	1.81	0.0738	0
MA1, 1	-0.58935	0.08988	-6.56	<.0001	1
AR1, 1	0.74755	0.07785	9.60	<.0001	1

Figure 7.13 *continued*

Constant Estimate	0.225409
Variance Estimate	0.904034
Std Error Estimate	0.950807
AIC	273.9155
SBC	281.7009
Number of Residuals	99

The moving-average parameter estimate, labeled “MA1,1”, is -0.58935 . Both the moving-average and the autoregressive parameters have significant t values. Note that the variance estimate, AIC, and SBC are all smaller than they were for the AR(1) model, indicating that the ARMA(1,1) model fits the data better without over-parameterizing.

The graphical check of the residuals from this model is shown in [Figure 7.14](#) and [Figure 7.15](#). The residual correlation and white noise test plots show that you cannot reject the hypothesis that the residuals are uncorrelated. The normality plots also show no departure from normality. Thus, you conclude that the ARMA(1,1) model is adequate for the change in SALES series, and there is no point in trying more complex models.

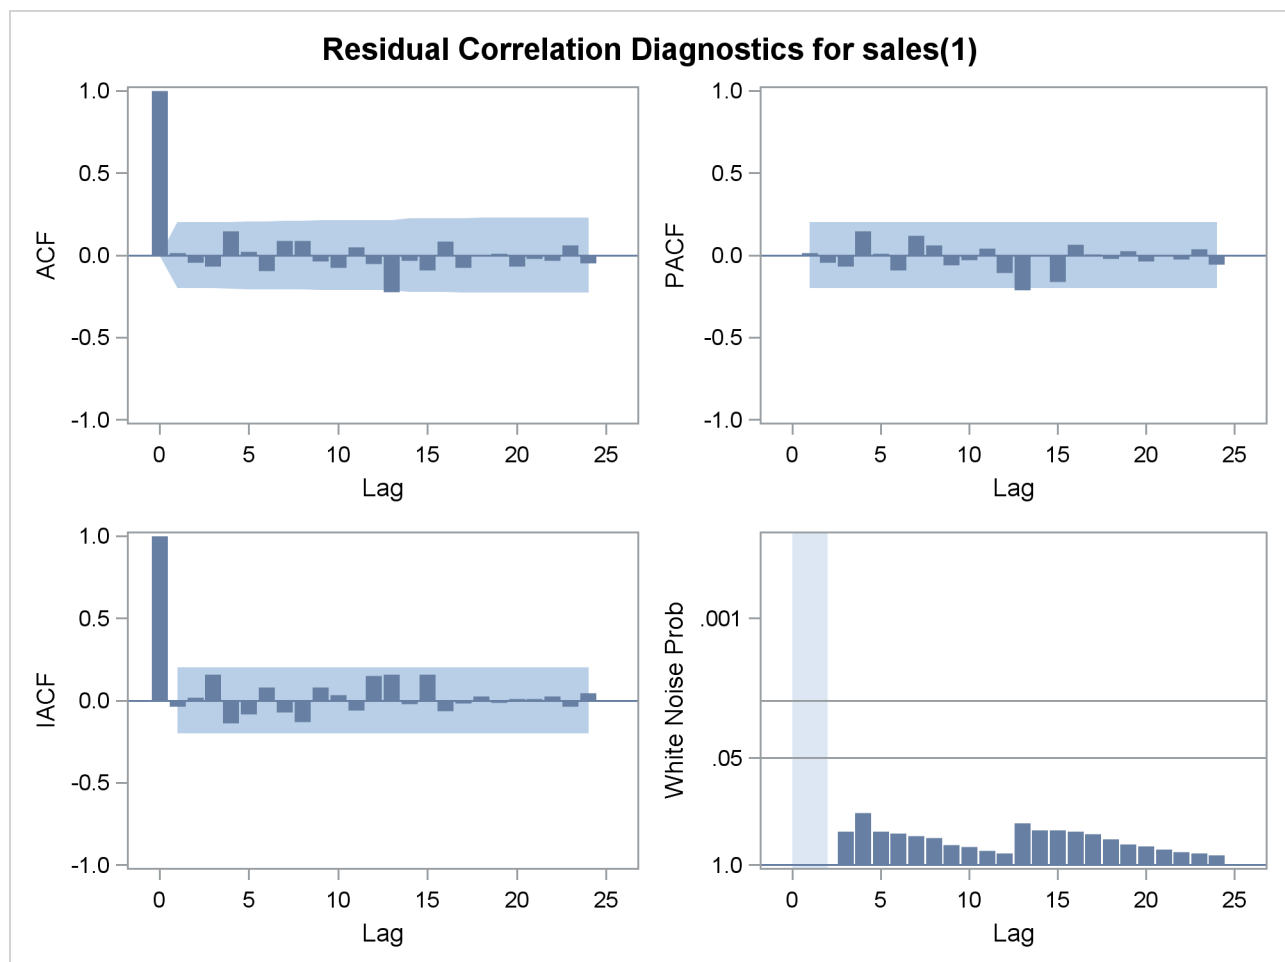
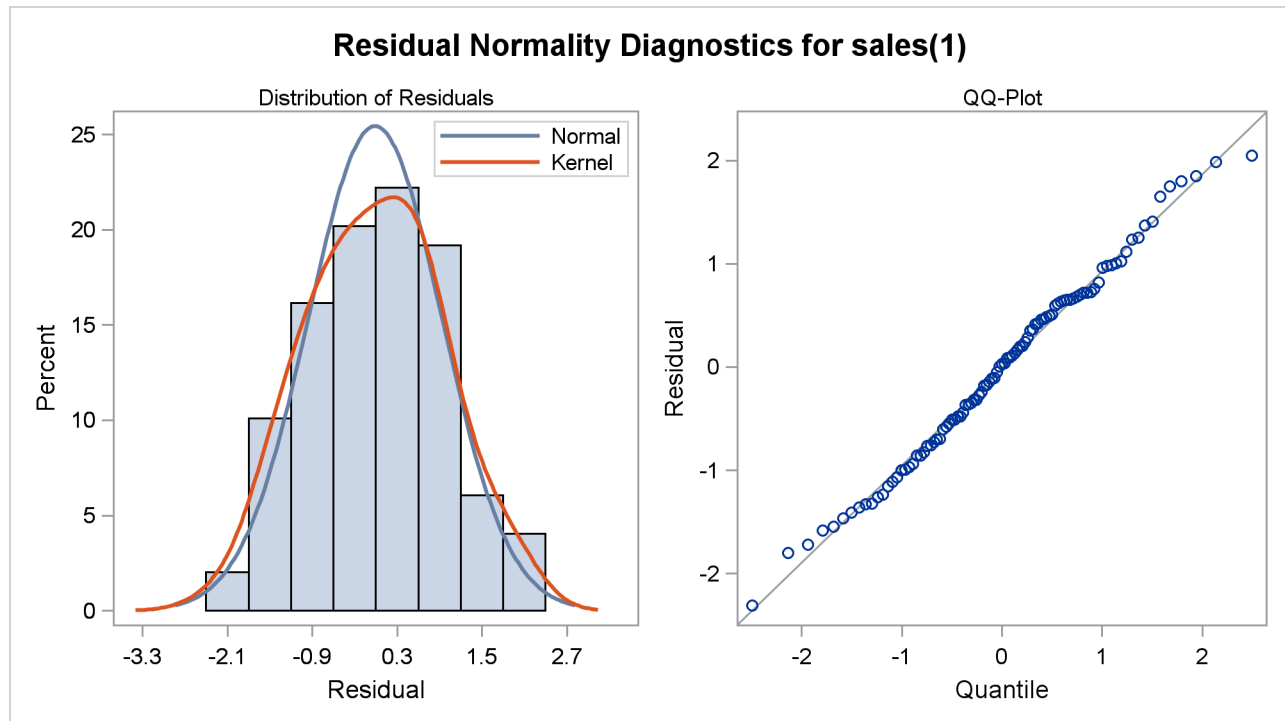
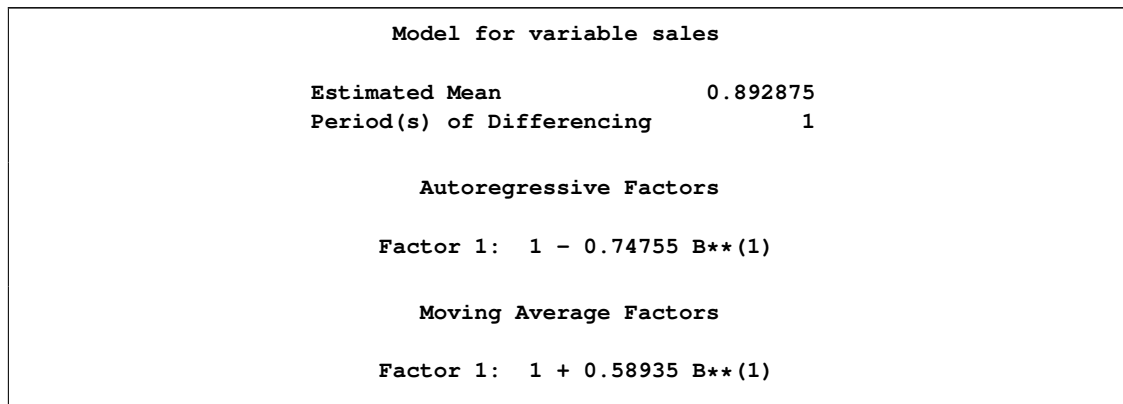
Figure 7.14 White Noise Check of Residuals for the ARMA(1,1) Model

Figure 7.15 Normality Check of Residuals for the ARMA(1,1) Model

The form of the estimated ARIMA(1,1,1) model for SALES is shown in Figure 7.16.

Figure 7.16 Estimated ARIMA(1,1,1) Model for SALES

The estimated model shown in this output is

$$(1 - B)sales_t = 0.892875 + \frac{(1 + 0.58935B)}{(1 - 0.74755B)}a_t$$

In addition to the residual analysis of a model, it is often useful to check whether there are any changes in the time series that are not accounted for by the currently estimated model. The OUTLIER statement enables you to detect such changes. For a long series, this task can be computationally burdensome. Therefore, in

general, it is better done after a model that fits the data reasonably well has been found. Figure 7.17 shows the output of the simplest form of the OUTLIER statement:

```
outlier;
run;
```

Two possible outliers have been found for the model in question. See the section “Detecting Outliers” on page 262, and the examples Example 7.6 and Example 7.7, for more details about modeling in the presence of outliers. In this illustration these outliers are not discussed any further.

Figure 7.17 Outliers for the ARIMA(1,1,1) Model for SALES

The ARIMA Procedure				
Outlier Detection Summary				
Maximum number searched		2		
Number found		2		
Significance used		0.05		
Outlier Details				
Obs	Type	Estimate	Chi-Square	Approx Prob> ChiSq
10	Additive	0.56879	4.20	0.0403
67	Additive	0.55698	4.42	0.0355

Since the model diagnostic tests show that all the parameter estimates are significant and the residual series is white noise, the estimation and diagnostic checking stage is complete. You can now proceed to forecasting the SALES series with this ARIMA(1,1,1) model.

Forecasting Stage

To produce the forecast, use a FORECAST statement after the ESTIMATE statement for the model you decide is best. If the last model fit is not the best, then repeat the ESTIMATE statement for the best model before you use the FORECAST statement.

Suppose that the SALES series is monthly, that you want to forecast one year ahead from the most recently available SALES figure, and that the dates for the observations are given by a variable DATE in the input data set TEST. You use the following FORECAST statement:

```
forecast lead=12 interval=month id=date out=results;
run;
```

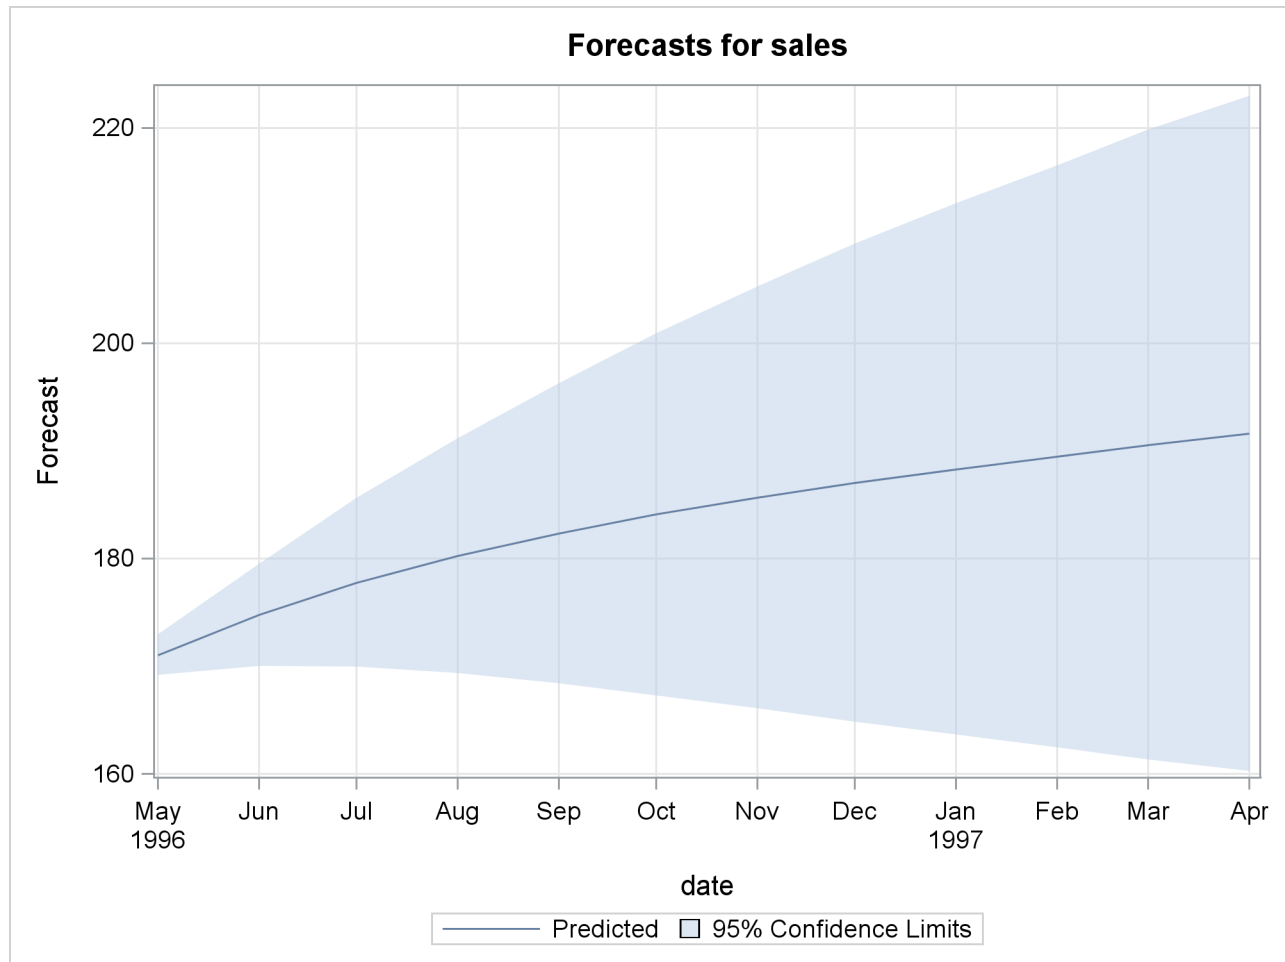
The LEAD= option specifies how many periods ahead to forecast (12 months, in this case). The ID= option specifies the ID variable, which is typically a SAS *date*, *time*, or *datetime* variable, used to date the observations of the SALES time series. The INTERVAL= option indicates that data are monthly and enables PROC ARIMA to extrapolate DATE values for forecast periods. The OUT= option writes the forecasts to

the output data set RESULTS. See the section “OUT= Data Set” on page 264 for information about the contents of the output data set.

By default, the FORECAST statement also prints and plots the forecast values, as shown in Figure 7.18 and Figure 7.19. The forecast table shows for each forecast period the observation number, forecast value, standard error estimate for the forecast value, and lower and upper limits for a 95% confidence interval for the forecast.

Figure 7.18 Forecasts for ARIMA(1,1,1) Model for SALES

The ARIMA Procedure				
Forecasts for variable sales				
Obs	Forecast	Std Error	95% Confidence Limits	
101	171.0320	0.9508	169.1684	172.8955
102	174.7534	2.4168	170.0165	179.4903
103	177.7608	3.9879	169.9445	185.5770
104	180.2343	5.5658	169.3256	191.1430
105	182.3088	7.1033	168.3866	196.2310
106	184.0850	8.5789	167.2707	200.8993
107	185.6382	9.9841	166.0698	205.2066
108	187.0247	11.3173	164.8433	209.2061
109	188.2866	12.5807	163.6289	212.9443
110	189.4553	13.7784	162.4501	216.4605
111	190.5544	14.9153	161.3209	219.7879
112	191.6014	15.9964	160.2491	222.9538

Figure 7.19 Forecasts for the ARMA(1,1,1) Model

Normally, you want the forecast values stored in an output data set, and you are not interested in seeing this printed list of the forecast. You can use the NOPRINT option in the FORECAST statement to suppress this output.

Using ARIMA Procedure Statements

The IDENTIFY, ESTIMATE, and FORECAST statements are related in a hierarchy. An IDENTIFY statement brings in a time series to be modeled; several ESTIMATE statements can follow to estimate different ARIMA models for the series; for each model estimated, several FORECAST statements can be used. Thus, a FORECAST statement must be preceded at some point by an ESTIMATE statement, and an ESTIMATE statement must be preceded at some point by an IDENTIFY statement. Additional IDENTIFY statements can be used to switch to modeling a different response series or to change the degree of differencing used.

The ARIMA procedure can be used interactively in the sense that all ARIMA procedure statements can be executed any number of times without reinvoking PROC ARIMA. You can execute ARIMA procedure state-

ments singly or in groups by following the single statement or group of statements with a RUN statement. The output for each statement or group of statements is produced when the RUN statement is entered.

A RUN statement does not terminate the PROC ARIMA step but tells the procedure to execute the statements given so far. You can end PROC ARIMA by submitting a QUIT statement, a DATA step, another PROC step, or an ENDSAS statement.

The example in the preceding section illustrates the interactive use of ARIMA procedure statements. The complete PROC ARIMA program for that example is as follows:

```
proc arima data=test;
  identify var=sales nlag=24;
  run;
  identify var=sales(1);
  run;
  estimate p=1;
  run;
  estimate p=1 q=1;
  run;
  outlier;
  run;
  forecast lead=12 interval=month id=date out=results;
  run;
quit;
```

General Notation for ARIMA Models

The order of an ARIMA (autoregressive integrated moving-average) model is usually denoted by the notation $ARIMA(p, d, q)$, where

p	is the order of the autoregressive part
d	is the order of the differencing
q	is the order of the moving-average process

If no differencing is done ($d = 0$), the models are usually referred to as $ARMA(p, q)$ models. The final model in the preceding example is an $ARIMA(1, 1, 1)$ model since the IDENTIFY statement specified $d = 1$, and the final ESTIMATE statement specified $p = 1$ and $q = 1$.

Notation for Pure ARIMA Models

Mathematically the pure ARIMA model is written as

$$W_t = \mu + \frac{\theta(B)}{\phi(B)} a_t$$

where

t	indexes time
W_t	is the response series Y_t or a difference of the response series
μ	is the mean term
B	is the backshift operator; that is, $BX_t = X_{t-1}$
$\phi(B)$	is the autoregressive operator, represented as a polynomial in the backshift operator: $\phi(B) = 1 - \phi_1 B - \dots - \phi_p B^p$
$\theta(B)$	is the moving-average operator, represented as a polynomial in the backshift operator: $\theta(B) = 1 - \theta_1 B - \dots - \theta_q B^q$
a_t	is the independent disturbance, also called the random error

The series W_t is computed by the IDENTIFY statement and is the series processed by the ESTIMATE statement. Thus, W_t is either the response series Y_t or a difference of Y_t specified by the differencing operators in the IDENTIFY statement.

For simple (nonseasonal) differencing, $W_t = (1 - B)^d Y_t$. For seasonal differencing $W_t = (1 - B)^d (1 - B^s)^D Y_t$, where d is the degree of nonseasonal differencing, D is the degree of seasonal differencing, and s is the length of the seasonal cycle.

For example, the mathematical form of the ARIMA(1,1,1) model estimated in the preceding example is

$$(1 - B)Y_t = \mu + \frac{(1 - \theta_1 B)}{(1 - \phi_1 B)} a_t$$

Model Constant Term

The ARIMA model can also be written as

$$\phi(B)(W_t - \mu) = \theta(B)a_t$$

or

$$\phi(B)W_t = \text{const} + \theta(B)a_t$$

where

$$\text{const} = \phi(B)\mu = \mu - \phi_1\mu - \phi_2\mu - \dots - \phi_p\mu$$

Thus, when an autoregressive operator and a mean term are both included in the model, the constant term for the model can be represented as $\phi(B)\mu$. This value is printed with the label “Constant Estimate” in the ESTIMATE statement output.

Notation for Transfer Function Models

The general ARIMA model with input series, also called the ARIMAX model, is written as

$$W_t = \mu + \sum_i \frac{\omega_i(B)}{\delta_i(B)} B^{k_i} X_{i,t} + \frac{\theta(B)}{\phi(B)} a_t$$

where

$X_{i,t}$	is the i th input time series or a difference of the i th input series at time t
k_i	is the pure time delay for the effect of the i th input series
$\omega_i(B)$	is the numerator polynomial of the transfer function for the i th input series
$\delta_i(B)$	is the denominator polynomial of the transfer function for the i th input series.

The model can also be written more compactly as

$$W_t = \mu + \sum_i \Psi_i(B) X_{i,t} + n_t$$

where

$\Psi_i(B)$	is the transfer function for the i th input series modeled as a ratio of the ω and δ polynomials: $\Psi_i(B) = (\omega_i(B)/\delta_i(B))B^{k_i}$
n_t	is the noise series: $n_t = (\theta(B)/\phi(B))a_t$

This model expresses the response series as a combination of past values of the random shocks and past values of other input series. The response series is also called the *dependent series* or *output series*. An input time series is also referred to as an *independent series* or a *predictor series*. Response variable, dependent variable, independent variable, or predictor variable are other terms often used.

Notation for Factored Models

ARIMA models are sometimes expressed in a factored form. This means that the ϕ , θ , ω , or δ polynomials are expressed as products of simpler polynomials. For example, you could express the pure ARIMA model as

$$W_t = \mu + \frac{\theta_1(B)\theta_2(B)}{\phi_1(B)\phi_2(B)}a_t$$

where $\phi_1(B)\phi_2(B) = \phi(B)$ and $\theta_1(B)\theta_2(B) = \theta(B)$.

When an ARIMA model is expressed in factored form, the order of the model is usually expressed by using a factored notation also. The order of an ARIMA model expressed as the product of two factors is denoted as $\text{ARIMA}(p,d,q) \times (P,D,Q)$.

Notation for Seasonal Models

ARIMA models for time series with regular seasonal fluctuations often use differencing operators and autoregressive and moving-average parameters at lags that are multiples of the length of the seasonal cycle. When all the terms in an ARIMA model factor refer to lags that are a multiple of a constant s , the constant is factored out and suffixed to the $\text{ARIMA}(p,d,q)$ notation.

Thus, the general notation for the order of a seasonal ARIMA model with both seasonal and nonseasonal factors is $\text{ARIMA}(p,d,q) \times (P,D,Q)_s$. The term (p,d,q) gives the order of the nonseasonal part of the ARIMA model; the term $(P,D,Q)_s$ gives the order of the seasonal part. The value of s is the number of observations

in a seasonal cycle: 12 for monthly series, 4 for quarterly series, 7 for daily series with day-of-week effects, and so forth.

For example, the notation $\text{ARIMA}(0,1,2) \times (0,1,1)_{12}$ describes a seasonal ARIMA model for monthly data with the following mathematical form:

$$(1 - B)(1 - B^{12})Y_t = \mu + (1 - \theta_{1,1}B - \theta_{1,2}B^2)(1 - \theta_{2,1}B^{12})a_t$$

Stationarity

The noise (or residual) series for an ARMA model must be *stationary*, which means that both the expected values of the series and its autocovariance function are independent of time.

The standard way to check for nonstationarity is to plot the series and its autocorrelation function. You can visually examine a graph of the series over time to see if it has a visible trend or if its variability changes noticeably over time. If the series is nonstationary, its autocorrelation function will usually decay slowly.

Another way of checking for stationarity is to use the stationarity tests described in the section “[Stationarity Tests](#)” on page 248.

Most time series are nonstationary and must be transformed to a stationary series before the ARIMA modeling process can proceed. If the series has a nonstationary variance, taking the log of the series can help. You can compute the log values in a DATA step and then analyze the log values with PROC ARIMA.

If the series has a trend over time, seasonality, or some other nonstationary pattern, the usual solution is to take the difference of the series from one period to the next and then analyze this differenced series. Sometimes a series might need to be differenced more than once or differenced at lags greater than one period. (If the trend or seasonal effects are very regular, the introduction of explanatory variables can be an appropriate alternative to differencing.)

Differencing

Differencing of the response series is specified with the VAR= option of the IDENTIFY statement by placing a list of differencing periods in parentheses after the variable name. For example, to take a simple first difference of the series SALES, use the statement

```
identify var=sales(1);
```

In this example, the change in SALES from one period to the next is analyzed.

A deterministic seasonal pattern also causes the series to be nonstationary, since the expected value of the series is not the same for all time periods but is higher or lower depending on the season. When the series has a seasonal pattern, you might want to difference the series at a lag that corresponds to the length of the seasonal cycle. For example, if SALES is a monthly series, the statement

```
identify var=sales(12);
```

takes a seasonal difference of SALES, so that the series analyzed is the change in SALES from its value in the same month one year ago.

To take a second difference, add another differencing period to the list. For example, the following statement takes the second difference of SALES:

```
identify var=sales(1,1);
```

That is, SALES is differenced once at lag 1 and then differenced again, also at lag 1. The statement

```
identify var=sales(2);
```

creates a 2-span difference—that is, current period SALES minus SALES from two periods ago. The statement

```
identify var=sales(1,12);
```

takes a second-order difference of SALES, so that the series analyzed is the difference between the current period-to-period change in SALES and the change 12 periods ago. You might want to do this if the series had both a trend over time and a seasonal pattern.

There is no limit to the order of differencing and the degree of lagging for each difference.

Differencing not only affects the series used for the IDENTIFY statement output but also applies to any following ESTIMATE and FORECAST statements. ESTIMATE statements fit ARMA models to the differenced series. FORECAST statements forecast the differences and automatically sum these differences back to undo the differencing operation specified by the IDENTIFY statement, thus producing the final forecast result.

Differencing of input series is specified by the CROSSCORR= option and works just like differencing of the response series. For example, the statement

```
identify var=y(1) crosscorr=(x1(1) x2(1));
```

takes the first difference of Y, the first difference of X1, and the first difference of X2. Whenever X1 and X2 are used in INPUT= options in following ESTIMATE statements, these names refer to the differenced series.

Subset, Seasonal, and Factored ARMA Models

The simplest way to specify an ARMA model is to give the order of the AR and MA parts with the P= and Q= options. When you do this, the model has parameters for the AR and MA parts for all lags through the order specified. However, you can control the form of the ARIMA model exactly as shown in the following section.

Subset Models

You can control which lags have parameters by specifying the P= or Q= option as a list of lags in parentheses. A model that includes parameters for only some lags is sometimes called a *subset* or *additive model*. For example, consider the following two ESTIMATE statements:

```
identify var=sales;
estimate p=4;
estimate p=(1 4);
```

Both specify AR(4) models, but the first has parameters for lags 1, 2, 3, and 4, while the second has parameters for lags 1 and 4, with the coefficients for lags 2 and 3 constrained to 0. The mathematical form of the autoregressive models produced by these two specifications is shown in Table 7.1.

Table 7.1 Saturated versus Subset Models

Option	Autoregressive Operator
P=4	$(1 - \phi_1 B - \phi_2 B^2 - \phi_3 B^3 - \phi_4 B^4)$
P=(1 4)	$(1 - \phi_1 B - \phi_4 B^4)$

Seasonal Models

One particularly useful kind of subset model is a *seasonal model*. When the response series has a seasonal pattern, the values of the series at the same time of year in previous years can be important for modeling the series. For example, if the series SALES is observed monthly, the statements

```
identify var=sales;
estimate p=(12);
```

model SALES as an average value plus some fraction of its deviation from this average value a year ago, plus a random error. Although this is an AR(12) model, it has only one autoregressive parameter.

Factored Models

A factored model (also referred to as a multiplicative model) represents the ARIMA model as a product of simpler ARIMA models. For example, you might model SALES as a combination of an AR(1) process that reflects short term dependencies and an AR(12) model that reflects the seasonal pattern.

It might seem that the way to do this is with the option P=(1 12), but the AR(1) process also operates in past years; you really need autoregressive parameters at lags 1, 12, and 13. You can specify a subset model with separate parameters at these lags, or you can specify a factored model that represents the model as the product of an AR(1) model and an AR(12) model. Consider the following two ESTIMATE statements:

```

identify var=sales;
estimate p=(1 12 13);
estimate p=(1) (12);

```

The mathematical form of the autoregressive models produced by these two specifications are shown in Table 7.2.

Table 7.2 Subset versus Factored Models

Option	Autoregressive Operator
P=(1 12 13)	$(1 - \phi_1 B - \phi_{12} B^{12} - \phi_{13} B^{13})$
P=(1)(12)	$(1 - \phi_1 B)(1 - \phi_{12} B^{12})$

Both models fit by these two ESTIMATE statements predict SALES from its values 1, 12, and 13 periods ago, but they use different parameterizations. The first model has three parameters, whose meanings may be hard to interpret.

The factored specification P=(1)(12) represents the model as the product of two different AR models. It has only two parameters: one that corresponds to recent effects and one that represents seasonal effects. Thus the factored model is more parsimonious, and its parameter estimates are more clearly interpretable.

Input Variables and Regression with ARMA Errors

In addition to past values of the response series and past errors, you can also model the response series using the current and past values of other series, called *input series*.

Several different names are used to describe ARIMA models with input series. *Transfer function model*, *intervention model*, *interrupted time series model*, *regression model with ARMA errors*, *Box-Tiao model*, and *ARIMAX model* are all different names for ARIMA models with input series. Pankratz (1991) refers to these models as *dynamic regression* models.

Using Input Series

To use input series, list the input series in a CROSSCORR= option on the IDENTIFY statement and specify how they enter the model with an INPUT= option on the ESTIMATE statement. For example, you might use a series called PRICE to help model SALES, as shown in the following statements:

```

proc arima data=a;
  identify var=sales crosscorr=price;
  estimate input=price;
run;

```

This example performs a simple linear regression of SALES on PRICE; it produces the same results as PROC REG or another SAS regression procedure. The mathematical form of the model estimated by these

statements is

$$Y_t = \mu + \omega_0 X_t + a_t$$

The parameter estimates table for this example (using simulated data) is shown in Figure 7.20. The intercept parameter is labeled MU. The regression coefficient for PRICE is labeled NUM1. (See the section “Naming of Model Parameters” on page 258 for information about how parameters for input series are named.)

Figure 7.20 Parameter Estimates Table for Regression Model

The ARIMA Procedure							
Conditional Least Squares Estimation							
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift
MU	199.83602	2.99463	66.73	<.0001	0	sales	0
NUM1	-9.99299	0.02885	-346.38	<.0001	0	price	0

Any number of input variables can be used in a model. For example, the following statements fit a multiple regression of SALES on PRICE and INCOME:

```
proc arima data=a;
  identify var=sales crosscorr=(price income);
  estimate input=(price income);
run;
```

The mathematical form of the regression model estimated by these statements is

$$Y_t = \mu + \omega_1 X_{1,t} + \omega_2 X_{2,t} + a_t$$

Lagging and Differencing Input Series

You can also difference and lag the input series. For example, the following statements regress the change in SALES on the change in PRICE lagged by one period. The difference of PRICE is specified with the CROSSCORR= option and the lag of the change in PRICE is specified by the 1 \$ in the INPUT= option.

```
proc arima data=a;
  identify var=sales(1) crosscorr=price(1);
  estimate input=( 1 $ price );
run;
```

These statements estimate the model

$$(1 - B)Y_t = \mu + \omega_0(1 - B)X_{t-1} + a_t$$

Regression with ARMA Errors

You can combine input series with ARMA models for the errors. For example, the following statements regress SALES on INCOME and PRICE but with the error term of the regression model (called the *noise series* in ARIMA modeling terminology) assumed to be an ARMA(1,1) process.

```
proc arima data=a;
    identify var=sales crosscorr=(price income);
    estimate p=1 q=1 input=(price income);
run;
```

These statements estimate the model

$$Y_t = \mu + \omega_1 X_{1,t} + \omega_2 X_{2,t} + \frac{(1 - \theta_1 B)}{(1 - \phi_1 B)} a_t$$

Stationarity and Input Series

Note that the requirement of stationarity applies to the noise series. If there are no input variables, the response series (after differencing and minus the mean term) and the noise series are the same. However, if there are inputs, the noise series is the residual after the effect of the inputs is removed.

There is no requirement that the input series be stationary. If the inputs are nonstationary, the response series will be nonstationary, even though the noise process might be stationary.

When nonstationary input series are used, you can fit the input variables first with no ARMA model for the errors and then consider the stationarity of the residuals before identifying an ARMA model for the noise part.

Identifying Regression Models with ARMA Errors

Previous sections described the ARIMA modeling identification process that uses the autocorrelation function plots produced by the IDENTIFY statement. This identification process does not apply when the response series depends on input variables. This is because it is the noise process for which you need to identify an ARIMA model, and when input series are involved the response series adjusted for the mean is no longer an estimate of the noise series.

However, if the input series are independent of the noise series, you can use the residuals from the regression model as an estimate of the noise series, then apply the ARIMA modeling identification process to this residual series. This assumes that the noise process is stationary.

The PLOT option in the ESTIMATE statement produces similar plots for the model residuals as the IDENTIFY statement produces for the response series. The PLOT option prints an autocorrelation function plot, an inverse autocorrelation function plot, and a partial autocorrelation function plot for the residual series. Note that these residual correlation plots are produced by default.

The following statements show how the PLOT option is used to identify the ARMA(1,1) model for the noise process used in the preceding example of regression with ARMA errors:

```
proc arima data=a;
  identify var=sales crosscorr=(price income) noprint;
  estimate input=(price income) plot;
  run;
  estimate p=1 q=1 input=(price income);
run;
```

In this example, the IDENTIFY statement includes the NOPRINT option since the autocorrelation plots for the response series are not useful when you know that the response series depends on input series.

The first ESTIMATE statement fits the regression model with no model for the noise process. The PLOT option produces plots of the autocorrelation function, inverse autocorrelation function, and partial autocorrelation function for the residual series of the regression on PRICE and INCOME.

By examining the PLOT option output for the residual series, you verify that the residual series is stationary and identify an ARMA(1,1) model for the noise process. The second ESTIMATE statement fits the final model.

Although this discussion addresses regression models, the same remarks apply to identifying an ARIMA model for the noise process in models that include input series with complex transfer functions.

Intervention Models and Interrupted Time Series

One special kind of ARIMA model with input series is called an *intervention model* or *interrupted time series* model. In an intervention model, the input series is an indicator variable that contains discrete values that flag the occurrence of an event affecting the response series. This event is an intervention in or an interruption of the normal evolution of the response time series, which, in the absence of the intervention, is usually assumed to be a pure ARIMA process.

Intervention models can be used both to model and forecast the response series and also to analyze the impact of the intervention. When the focus is on estimating the effect of the intervention, the process is often called *intervention analysis* or *interrupted time series analysis*.

Impulse Interventions

The intervention can be a one-time event. For example, you might want to study the effect of a short-term advertising campaign on the sales of a product. In this case, the input variable has the value of 1 for the period during which the advertising campaign took place and the value 0 for all other periods. Intervention variables of this kind are sometimes called *impulse functions* or *pulse functions*.

Suppose that SALES is a monthly series, and a special advertising effort was made during the month of March 1992. The following statements estimate the effect of this intervention by assuming an ARMA(1,1) model for SALES. The model is specified just like the regression model, but the intervention variable AD is constructed in the DATA step as a zero-one indicator for the month of the advertising effort.

```
data a;
```

```

    set a;
    ad = (date = '1mar1992'd);
run;

proc arima data=a;
    identify var=sales crosscorr=ad;
    estimate p=1 q=1 input=ad;
run;

```

Continuing Interventions

Other interventions can be continuing, in which case the input variable flags periods before and after the intervention. For example, you might want to study the effect of a change in tax rates on some economic measure. Another example is a study of the effect of a change in speed limits on the rate of traffic fatalities. In this case, the input variable has the value 1 after the new speed limit went into effect and the value 0 before. Intervention variables of this kind are called *step functions*.

Another example is the effect of news on product demand. Suppose it was reported in July 1996 that consumption of the product prevents heart disease (or causes cancer), and SALES is consistently higher (or lower) thereafter. The following statements model the effect of this news intervention:

```

data a;
    set a;
    news = (date >= '1jul1996'd);
run;

proc arima data=a;
    identify var=sales crosscorr=news;
    estimate p=1 q=1 input=news;
run;

```

Interaction Effects

You can include any number of intervention variables in the model. Intervention variables can have any pattern—impulse and continuing interventions are just two possible cases. You can mix discrete valued intervention variables and continuous regressor variables in the same model.

You can also form interaction effects by multiplying input variables and including the product variable as another input. Indeed, as long as the dependent measure is continuous and forms a regular time series, you can use PROC ARIMA to fit any general linear model in conjunction with an ARMA model for the error process by using input variables that correspond to the columns of the design matrix of the linear model.

Rational Transfer Functions and Distributed Lag Models

How an input series enters the model is called its *transfer function*. Thus, ARIMA models with input series are sometimes referred to as transfer function models.

In the preceding regression and intervention model examples, the transfer function is a single scale parameter. However, you can also specify complex transfer functions composed of numerator and denominator polynomials in the backshift operator. These transfer functions operate on the input series in the same way that the ARMA specification operates on the error term.

Numerator Factors

For example, suppose you want to model the effect of PRICE on SALES as taking place gradually with the impact distributed over several past lags of PRICE. This is illustrated by the following statements:

```
proc arima data=a;
    identify var=sales crosscorr=price;
    estimate input=( 1 2 3) price );
run;
```

These statements estimate the model

$$Y_t = \mu + (\omega_0 - \omega_1 B - \omega_2 B^2 - \omega_3 B^3)X_t + a_t$$

This example models the effect of PRICE on SALES as a linear function of the current and three most recent values of PRICE. It is equivalent to a multiple linear regression of SALES on PRICE, LAG(PRICE), LAG2(PRICE), and LAG3(PRICE).

This is an example of a transfer function with one *numerator factor*. The numerator factors for a transfer function for an input series are like the MA part of the ARMA model for the noise series.

Denominator Factors

You can also use transfer functions with *denominator factors*. The denominator factors for a transfer function for an input series are like the AR part of the ARMA model for the noise series. Denominator factors introduce exponentially weighted, infinite distributed lags into the transfer function.

To specify transfer functions with denominator factors, place the denominator factors after a slash (/) in the INPUT= option. For example, the following statements estimate the PRICE effect as an infinite distributed lag model with exponentially declining weights:

```
proc arima data=a;
    identify var=sales crosscorr=price;
    estimate input=( / (1) price );
run;
```

The transfer function specified by these statements is as follows:

$$\frac{\omega_0}{(1 - \delta_1 B)} X_t$$

This transfer function also can be written in the following equivalent form:

$$\omega_0 \left(1 + \sum_{i=1}^{\infty} \delta_1^i B^i \right) X_t$$

This transfer function can be used with intervention inputs. When it is used with a pulse function input, the result is an intervention effect that dies out gradually over time. When it is used with a step function input, the result is an intervention effect that increases gradually to a limiting value.

Rational Transfer Functions

By combining various numerator and denominator factors in the INPUT= option, you can specify *rational transfer functions* of any complexity. To specify an input with a general rational transfer function of the form

$$\frac{\omega(B)}{\delta(B)} B^k X_t$$

use an INPUT= option in the ESTIMATE statement of the form

input=(k \$ (*ω-lags*) / (*δ-lags*) x)

See the section “[Specifying Inputs and Transfer Functions](#)” on page 255 for more information.

Identifying Transfer Function Models

The CROSSCORR= option of the IDENTIFY statement prints sample cross-correlation functions that show the correlation between the response series and the input series at different lags. The sample cross-correlation function can be used to help identify the form of the transfer function appropriate for an input series. See textbooks on time series analysis for information about using cross-correlation functions to identify transfer function models.

For the cross-correlation function to be meaningful, the input and response series must be filtered with a prewhitening model for the input series. See the section “[Prewhitening](#)” on page 248 for more information about this issue.

Forecasting with Input Variables

To forecast a response series by using an ARIMA model with inputs, you need values of the input series for the forecast periods. You can supply values for the input variables for the forecast periods in the DATA= data set, or you can have PROC ARIMA forecast the input variables.

If you do not have future values of the input variables in the input data set used by the FORECAST statement, the input series must be forecast before the ARIMA procedure can forecast the response series. If you fit an ARIMA model to each of the input series for which you need forecasts before fitting the model for the

response series, the FORECAST statement automatically uses the ARIMA models for the input series to generate the needed forecasts of the inputs.

For example, suppose you want to forecast SALES for the next 12 months. In this example, the change in SALES is predicted as a function of the change in PRICE, plus an ARMA(1,1) noise process. To forecast SALES by using PRICE as an input, you also need to fit an ARIMA model for PRICE.

The following statements fit an AR(2) model to the change in PRICE before fitting and forecasting the model for SALES. The FORECAST statement automatically forecasts PRICE using this AR(2) model to get the future inputs needed to produce the forecast of SALES.

```
proc arima data=a;
  identify var=price(1);
  estimate p=2;
  identify var=sales(1) crosscorr=price(1);
  estimate p=1 q=1 input=price;
  forecast lead=12 interval=month id=date out=results;
run;
```

Fitting a model to the input series is also important for identifying transfer functions. (See the section “Prewhitening” on page 248 for more information.)

Input values from the DATA= data set and input values forecast by PROC ARIMA can be combined. For example, a model for SALES might have three input series: PRICE, INCOME, and TAXRATE. For the forecast, you assume that the tax rate will be unchanged. You have a forecast for INCOME from another source but only for the first few periods of the SALES forecast you want to make. You have no future values for PRICE, which needs to be forecast as in the preceding example.

In this situation, you include observations in the input data set for all forecast periods, with SALES and PRICE set to a missing value, with TAXRATE set to its last actual value, and with INCOME set to forecast values for the periods you have forecasts for and set to missing values for later periods. In the PROC ARIMA step, you estimate ARIMA models for PRICE and INCOME before you estimate the model for SALES, as shown in the following statements:

```
proc arima data=a;
  identify var=price(1);
  estimate p=2;
  identify var=income(1);
  estimate p=2;
  identify var=sales(1) crosscorr=( price(1) income(1) taxrate );
  estimate p=1 q=1 input=( price income taxrate );
  forecast lead=12 interval=month id=date out=results;
run;
```

In forecasting SALES, the ARIMA procedure uses as inputs the value of PRICE forecast by its ARIMA model, the value of TAXRATE found in the DATA= data set, and the value of INCOME found in the DATA= data set, or, when the INCOME variable is missing, the value of INCOME forecast by its ARIMA model. (Because SALES is missing for future time periods, the estimation of model parameters is not affected by the forecast values for PRICE, INCOME, or TAXRATE.)

Data Requirements

PROC ARIMA can handle time series of moderate size; there should be at least 30 observations. With fewer than 30 observations, the parameter estimates might be poor. With thousands of observations, the method requires considerable computer time and memory.

Syntax: ARIMA Procedure

The ARIMA procedure uses the following statements:

```
PROC ARIMA options ;
  BY variables ;
  IDENTIFY VAR=variable options ;
  ESTIMATE options ;
  OUTLIER options ;
  FORECAST options ;
```

The **PROC ARIMA** and **IDENTIFY** statements are required.

Functional Summary

The statements and options that control the ARIMA procedure are summarized in [Table 7.3](#).

Table 7.3 Functional Summary

Description	Statement	Option
Data Set Options		
specify the input data set	PROC ARIMA	DATA=
	IDENTIFY	DATA=
specify the output data set	PROC ARIMA	OUT=
	FORECAST	OUT=
include only forecasts in the output data set	FORECAST	NOOUTALL
write autocovariances to output data set	IDENTIFY	OUTCOV=
write parameter estimates to an output data set	ESTIMATE	OUTEST=
write correlation of parameter estimates	ESTIMATE	OUTCORR
write covariance of parameter estimates	ESTIMATE	OUTCOV
write estimated model to an output data set	ESTIMATE	OUTMODEL=
write statistics of fit to an output data set	ESTIMATE	OUTSTAT=

Table 7.3 *continued*

Description	Statement	Option
Options for Identifying the Series		
difference time series and plot autocorrelations	IDENTIFY	
specify response series and differencing	IDENTIFY	VAR=
specify and cross-correlate input series	IDENTIFY	CROSSCORR=
center data by subtracting the mean	IDENTIFY	CENTER
exclude missing values	IDENTIFY	NOMISS
delete previous models and start	IDENTIFY	CLEAR
specify the significance level for tests	IDENTIFY	ALPHA=
perform tentative ARMA order identification by using the ESACF method	IDENTIFY	ESACF
perform tentative ARMA order identification by using the MINIC method	IDENTIFY	MINIC
perform tentative ARMA order identification by using the SCAN method	IDENTIFY	SCAN
specify the range of autoregressive model orders for estimating the error series for the MINIC method	IDENTIFY	PERROR=
determine the AR dimension of the SCAN, ESACF, and MINIC tables	IDENTIFY	P=
determine the MA dimension of the SCAN, ESACF, and MINIC tables	IDENTIFY	Q=
perform stationarity tests	IDENTIFY	STATIONARITY=
selection of white noise test statistic in the presence of missing values	IDENTIFY	WHITENOISE=
Options for Defining and Estimating the Model		
specify and estimate ARIMA models	ESTIMATE	
specify autoregressive part of model	ESTIMATE	P=
specify moving-average part of model	ESTIMATE	Q=
specify input variables and transfer functions	ESTIMATE	INPUT=
drop mean term from the model	ESTIMATE	NOINT
specify the estimation method	ESTIMATE	METHOD=
use alternative form for transfer functions	ESTIMATE	ALTPARM
suppress degrees-of-freedom correction in variance estimates	ESTIMATE	NODF
selection of white noise test statistic in the presence of missing values	ESTIMATE	WHITENOISE=
Options for Outlier Detection		
specify the significance level for tests	OUTLIER	ALPHA=
identify detected outliers with variable	OUTLIER	ID=
limit the number of outliers	OUTLIER	MAXNUM=

Table 7.3 *continued*

Description	Statement	Option
limit the number of outliers to a percentage of the series	OUTLIER	MAXPCT=
specify the variance estimator used for testing	OUTLIER	SIGMA=
specify the type of level shifts	OUTLIER	TYPE=
Printing Control Options		
limit number of lags shown in correlation plots	IDENTIFY	NLAG=
suppress printed output for identification	IDENTIFY	NOPRINT
plot autocorrelation functions of the residuals	ESTIMATE	PLOT
print log-likelihood around the estimates	ESTIMATE	GRID
control spacing for GRID option	ESTIMATE	GRIDVAL=
print details of the iterative estimation process	ESTIMATE	PRINTALL
suppress printed output for estimation	ESTIMATE	NOPRINT
suppress printing of the forecast values	FORECAST	NOPRINT
print the one-step forecasts and residuals	FORECAST	PRINTALL
Plotting Control Options		
request plots associated with model identification, residual analysis, and forecasting	PROC ARIMA	PLOTS=
Options to Specify Parameter Values		
specify autoregressive starting values	ESTIMATE	AR=
specify moving-average starting values	ESTIMATE	MA=
specify a starting value for the mean parameter	ESTIMATE	MU=
specify starting values for transfer functions	ESTIMATE	INITVAL=
Options to Control the Iterative Estimation Process		
specify convergence criterion	ESTIMATE	CONVERGE=
specify the maximum number of iterations	ESTIMATE	MAXITER=
specify criterion for checking for singularity	ESTIMATE	SINGULAR=
suppress the iterative estimation process	ESTIMATE	NOEST
omit initial observations from objective	ESTIMATE	BACKLIM=
specify perturbation for numerical derivatives	ESTIMATE	DELTA=
omit stationarity and invertibility checks	ESTIMATE	NOSTABLE
use preliminary estimates as starting values for ML and ULS	ESTIMATE	NOLS

Table 7.3 *continued*

Description	Statement	Option
Options for Forecasting		
forecast the response series	FORECAST	
specify how many periods to forecast	FORECAST	LEAD=
specify the ID variable	FORECAST	ID=
specify the periodicity of the series	FORECAST	INTERVAL=
specify size of forecast confidence limits	FORECAST	ALPHA=
start forecasting before end of the input data	FORECAST	BACK=
specify the variance term used to compute forecast standard errors and confidence limits	FORECAST	SIGSQ=
control the alignment of SAS date values	FORECAST	ALIGN=
BY Groups		
specify BY group processing	BY	

PROC ARIMA Statement

PROC ARIMA *options* ;

The following options can be used in the PROC ARIMA statement.

DATA=SAS-data-set

specifies the name of the SAS data set that contains the time series. If different DATA= specifications appear in the PROC ARIMA and IDENTIFY statements, the one in the IDENTIFY statement is used. If the DATA= option is not specified in either the PROC ARIMA or IDENTIFY statement, the most recently created SAS data set is used.

PLOTS<(global-plot-options)> <= plot-request <(options)>>

PLOTS<(global-plot-options)> <= (plot-request <(options)> <... plot-request <(options)>>>

controls the plots produced through ODS Graphics. When you specify only one plot request, you can omit the parentheses around the plot request.

Here are some examples:

```
plots=none
plots=all
plots(unpack)=series(corr crosscorr)
plots(only)=(series(corr crosscorr) residual(normal smooth))
```

Global Plot Options:

The *global-plot-options* apply to all relevant plots generated by the ARIMA procedure. The following *global-plot-options* are supported:

ONLY

suppresses the default plots. Only the plots specifically requested are produced.

UNPACK

breaks a graphic that is otherwise paneled into individual component plots.

Specific Plot Options:

The following list describes the specific plots and their options.

ALL

produces all plots appropriate for the particular analysis.

NONE

suppresses all plots.

SERIES(< series-plot-options >)

produces plots associated with the identification stage of the modeling. The panel plots corresponding to the CORR and CROSSCORR options are produced by default. The following *series-plot-options* are available:

ACF

produces the plot of autocorrelations.

ALL

produces all the plots associated with the identification stage.

CORR

produces a panel of plots that are useful in the trend and correlation analysis of the series. The panel consists of the following:

- the time series plot
- the series-autocorrelation plot
- the series-partial-autocorrelation plot
- the series-inverse-autocorrelation plot

CROSSCORR

produces panels of cross-correlation plots.

IACF

produces the plot of inverse-autocorrelations.

PACF

produces the plot of partial-autocorrelations.

RESIDUAL(*< residual-plot-options >*)

produces the residuals plots. The residual correlation and normality diagnostic panels are produced by default. The following *residual-plot-options* are available:

ACF

produces the plot of residual autocorrelations.

ALL

produces all the residual diagnostics plots appropriate for the particular analysis.

CORR

produces a summary panel of the residual correlation diagnostics that consists of the following:

- the residual-autocorrelation plot
- the residual-partial-autocorrelation plot
- the residual-inverse-autocorrelation plot
- a plot of Ljung-Box white-noise test p -values at different lags

HIST

produces the histogram of the residuals.

IACF

produces the plot of residual inverse-autocorrelations.

NORMAL

produces a summary panel of the residual normality diagnostics that consists of the following:

- histogram of the residuals
- normal quantile plot of the residuals

PACF

produces the plot of residual partial-autocorrelations.

QQ

produces the normal quantile plot of the residuals.

SMOOTH

produces a scatter plot of the residuals against time, which has an overlaid smooth fit.

WN

produces the plot of Ljung-Box white-noise test p -values at different lags.

FORECAST(*< forecast-plot-options >*)

produces the forecast plots in the forecasting stage. The forecast-only plot that shows the multistep forecasts in the forecast region is produced by default.

The following *forecast-plot-options* are available:

ALL

produces the forecast-only plot as well as the forecast plot.

FORECAST

produces a plot that shows the one-step-ahead forecasts as well as the multistep-ahead forecasts.

FORECASTONLY

produces a plot that shows only the multistep-ahead forecasts in the forecast region.

OUT=SAS-data-set

specifies a SAS data set to which the forecasts are output. If different OUT= specifications appear in the PROC ARIMA and FORECAST statements, the one in the FORECAST statement is used.

BY Statement

BY variables ;

A BY statement can be used in the ARIMA procedure to process a data set in groups of observations defined by the BY variables. Note that all IDENTIFY, ESTIMATE, and FORECAST statements specified are applied to all BY groups.

Because of the need to make data-based model selections, BY-group processing is not usually done with PROC ARIMA. You usually want to use different models for the different series contained in different BY groups, and the PROC ARIMA BY statement does not let you do this.

Using a BY statement imposes certain restrictions. The BY statement must appear before the first RUN statement. If a BY statement is used, the input data must come from the data set specified in the PROC statement; that is, no input data sets can be specified in IDENTIFY statements.

When a BY statement is used with PROC ARIMA, interactive processing applies only to the first BY group. Once the end of the PROC ARIMA step is reached, all ARIMA statements specified are executed again for each of the remaining BY groups in the input data set.

IDENTIFY Statement

IDENTIFY VAR=variable options ;

The IDENTIFY statement specifies the time series to be modeled, differences the series if desired, and computes statistics to help identify models to fit. Use an IDENTIFY statement for each time series that you want to model.

If other time series are to be used as inputs in a subsequent ESTIMATE statement, they must be listed in a CROSSCORR= list in the IDENTIFY statement.

The following options are used in the IDENTIFY statement. The VAR= option is required.

ALPHA=*significance-level*

The ALPHA= option specifies the significance level for tests in the IDENTIFY statement. The default is 0.05.

CENTER

centers each time series by subtracting its sample mean. The analysis is done on the centered data. Later, when forecasts are generated, the mean is added back. Note that centering is done after differencing. The CENTER option is normally used in conjunction with the NOCONSTANT option of the ESTIMATE statement.

CLEAR

deletes all old models. This option is useful when you want to delete old models so that the input variables are not prewhitened. (See the section “[Prewhitening](#)” on page 248 for more information.)

CROSSCORR=*variable (d11, d12, ..., d1k)***CROSSCORR=** (*variable (d11, d12, ..., d1k)... variable (d21, d22, ..., d2k)*)

names the variables cross-correlated with the response variable given by the VAR= specification.

Each variable name can be followed by a list of differencing lags in parentheses, the same as for the VAR= specification. If differencing is specified for a variable in the CROSSCORR= list, the differenced series is cross-correlated with the VAR= option series, and the differenced series is used when the ESTIMATE statement INPUT= option refers to the variable.

DATA=*SAS-data-set*

specifies the input SAS data set that contains the time series. If the DATA= option is omitted, the DATA= data set specified in the PROC ARIMA statement is used; if the DATA= option is omitted from the PROC ARIMA statement as well, the most recently created data set is used.

ESACF

computes the extended sample autocorrelation function and uses these estimates to tentatively identify the autoregressive and moving-average orders of mixed models.

The ESACF option generates two tables. The first table displays extended sample autocorrelation estimates, and the second table displays probability values that can be used to test the significance of these estimates. The $P=(p_{min} : p_{max})$ and $Q=(q_{min} : q_{max})$ options determine the size of the table.

The autoregressive and moving-average orders are tentatively identified by finding a triangular pattern in which all values are insignificant. The ARIMA procedure finds these patterns based on the IDENTIFY statement ALPHA= option and displays possible recommendations for the orders.

The following code generates an ESACF table with dimensions of $p=(0:7)$ and $q=(0:8)$.

```
proc arima data=test;
  identify var=x esacf p=(0:7) q=(0:8);
run;
```

See the section “[The ESACF Method](#)” on page 243 for more information.

MINIC

uses information criteria or penalty functions to provide tentative ARMA order identification. The

MINIC option generates a table that contains the computed information criterion associated with various ARMA model orders. The $PERROR=(p_{\epsilon,min} : p_{\epsilon,max})$ option determines the range of the autoregressive model orders used to estimate the error series. The $P=(p_{min} : p_{max})$ and $Q=(q_{min} : q_{max})$ options determine the size of the table. The ARMA orders are tentatively identified by those orders that minimize the information criterion.

The following statements generate a MINIC table with default dimensions of $p=(0:5)$ and $q=(0:5)$ and with the error series estimated by an autoregressive model with an order, p_{ϵ} , that minimizes the AIC in the range from 8 to 11.

```
proc arima data=test;
  identify var=x minic perror=(8:11);
run;
```

See the section “[The MINIC Method](#)” on page 245 for more information.

NLAG=number

indicates the number of lags to consider in computing the autocorrelations and cross-correlations. To obtain preliminary estimates of an $ARIMA(p, d, q)$ model, the NLAG= value must be at least $p + q + d$. The number of observations must be greater than or equal to the NLAG= value. The default value for NLAG= is 24 or one-fourth the number of observations, whichever is less. Even though the NLAG= value is specified, the NLAG= value can be changed according to the data set.

NOMISS

uses only the first continuous sequence of data with no missing values. By default, all observations are used.

NOPRINT

suppresses the normal printout (including the correlation plots) generated by the IDENTIFY statement.

OUTCOV=SAS-data-set

writes the autocovariances, autocorrelations, inverse autocorrelations, partial autocorrelations, and cross covariances to an output SAS data set. If the OUTCOV= option is not specified, no covariance output data set is created. See the section “[OUTCOV= Data Set](#)” on page 265 for more information.

P=($p_{min} : p_{max}$)

see the ESACF, MINIC, and SCAN options for details.

PERROR=($p_{\epsilon,min} : p_{\epsilon,max}$)

determines the range of the autoregressive model orders used to estimate the error series in MINIC, a tentative ARMA order identification method. See the section “[The MINIC Method](#)” on page 245 for more information. By default $p_{\epsilon,min}$ is set to p_{max} and $p_{\epsilon,max}$ is set to $p_{max} + q_{max}$, where p_{max} and q_{max} are the maximum settings of the P= and Q= options on the IDENTIFY statement.

Q=($q_{min} : q_{max}$)

see the ESACF, MINIC, and SCAN options for details.

SCAN

computes estimates of the squared canonical correlations and uses these estimates to tentatively identify the autoregressive and moving-average orders of mixed models.

The SCAN option generates two tables. The first table displays squared canonical correlation estimates, and the second table displays probability values that can be used to test the significance of these estimates. The $P=(p_{min} : p_{max})$ and $Q=(q_{min} : q_{max})$ options determine the size of each table.

The autoregressive and moving-average orders are tentatively identified by finding a rectangular pattern in which all values are insignificant. The ARIMA procedure finds these patterns based on the IDENTIFY statement ALPHA= option and displays possible recommendations for the orders.

The following code generates a SCAN table with default dimensions of $p=(0:5)$ and $q=(0:5)$. The recommended orders are based on a significance level of 0.1.

```
proc arima data=test;
  identify var=x scan alpha=0.1;
run;
```

See the section “[The SCAN Method](#)” on page 246 for more information.

STATIONARITY=

performs stationarity tests. Stationarity tests can be used to determine whether differencing terms should be included in the model specification. In each stationarity test, the autoregressive orders can be specified by a range, $test= ar_{max}$, or as a list of values, $test= (ar_1, \dots, ar_n)$, where $test$ is ADF, PP, or RW. The default is (0,1,2).

See the section “[Stationarity Tests](#)” on page 248 for more information.

STATIONARITY=(ADF= AR orders DLAG= s)

STATIONARITY=(DICKEY= AR orders DLAG= s)

performs augmented Dickey-Fuller tests. If the DLAG=s option is specified with s is greater than one, seasonal Dickey-Fuller tests are performed. The maximum allowable value of s is 12. The default value of s is 1. The following code performs augmented Dickey-Fuller tests with autoregressive orders 2 and 5.

```
proc arima data=test;
  identify var=x stationarity=(adf=(2,5));
run;
```

STATIONARITY=(PP= AR orders)

STATIONARITY=(PHILLIPS= AR orders)

performs Phillips-Perron tests. The following statements perform augmented Phillips-Perron tests with autoregressive orders ranging from 0 to 6.

```
proc arima data=test;
  identify var=x stationarity=(pp=6);
run;
```

STATIONARITY=(RW=AR orders)

STATIONARITY=(RANDOMWALK=AR orders)

performs random-walk-with-drift tests. The following statements perform random-walk-with-drift tests with autoregressive orders ranging from 0 to 2.

```
proc arima data=test;
  identify var=x stationarity=(rw);
run;
```

VAR=*variable*

VAR= *variable (d1, d2, ..., dk)*

names the variable that contains the time series to analyze. The VAR= option is required.

A list of differencing lags can be placed in parentheses after the variable name to request that the series be differenced at these lags. For example, VAR=X(1) takes the first differences of X. VAR=X(1,1) requests that X be differenced twice, both times with lag 1, producing a second difference series, which is

$$(X_t - X_{t-1}) - (X_{t-1} - X_{t-2}) = X_t - 2X_{t-1} + X_{t-2}.$$

VAR=X(2) differences X once at lag two ($X_t - X_{t-2}$).

If differencing is specified, it is the differenced series that is processed by any subsequent ESTIMATE statement.

WHITENOISE=ST | IGNOREMISS

specifies the type of test statistic that is used in the white noise test of the series when the series contains missing values. If WHITENOISE=IGNOREMISS, the standard Ljung-Box test statistic is used. If WHITENOISE=ST, a modification of this statistic suggested by Stoffer and Tolo (1992) is used. The default is WHITENOISE=ST.

ESTIMATE Statement

<label:>ESTIMATE *options* ;

The ESTIMATE statement specifies an ARMA model or transfer function model for the response variable specified in the previous IDENTIFY statement, and produces estimates of its parameters. The ESTIMATE statement also prints diagnostic information by which to check the model. The label in the ESTIMATE statement is optional. Include an ESTIMATE statement for each model that you want to estimate.

Options used in the ESTIMATE statement are described in the following sections.

Options for Defining the Model and Controlling Diagnostic Statistics

The following options are used to define the model to be estimated and to control the output that is printed.

ALTPARM

specifies the alternative parameterization of the overall scale of transfer functions in the model. See the section “[Alternative Model Parameterization](#)” on page 255 for details.

INPUT=*variable*

INPUT=(*transfer-function variable ...*)

specifies input variables and their transfer functions.

The variables used on the INPUT= option must be included in the CROSSCORR= list in the previous IDENTIFY statement. If any differencing is specified in the CROSSCORR= list, then the differenced series is used as the input to the transfer function.

The transfer function specification for an input variable is optional. If no transfer function is specified, the input variable enters the model as a simple regressor. If specified, the transfer function specification has the following syntax:

$$S$(L_{1,1}, L_{1,2}, \dots)(L_{2,1}, \dots) \dots / (L_{j,1}, \dots) \dots$$

Here, S is a shift or lag of the input variable, the terms before the slash (/) are numerator factors, and the terms after the slash (/) are denominator factors of the transfer function. All three parts are optional. See the section “[Specifying Inputs and Transfer Functions](#)” on page 255 for details.

METHOD=*value*

specifies the estimation method to use. METHOD=ML specifies the maximum likelihood method. METHOD=ULS specifies the unconditional least squares method. METHOD=CLS specifies the conditional least squares method. METHOD=CLS is the default. See the section “[Estimation Details](#)” on page 250 for more information.

NOCONSTANT

NOINT

suppresses the fitting of a constant (or intercept) parameter in the model. (That is, the parameter μ is omitted.)

NODF

estimates the variance by dividing the error sum of squares (SSE) by the number of residuals. The default is to divide the SSE by the number of residuals minus the number of free parameters in the model.

NOPRINT

suppresses the normal printout generated by the ESTIMATE statement. If the NOPRINT option is specified for the ESTIMATE statement, then any error and warning messages are printed to the SAS log.

P=*order*

P=(*lag*, ..., *lag*) ... (*lag*, ..., *lag*)

specifies the autoregressive part of the model. By default, no autoregressive parameters are fit.

$P=(l_1, l_2, \dots, l_k)$ defines a model with autoregressive parameters at the specified lags. $P=order$ is equivalent to $P=(1, 2, \dots, order)$.

A concatenation of parenthesized lists specifies a factored model. For example, $P=(1,2,5)(6,12)$ specifies the autoregressive model

$$(1 - \phi_{1,1}B - \phi_{1,2}B^2 - \phi_{1,3}B^5)(1 - \phi_{2,1}B^6 - \phi_{2,2}B^{12})$$

PLOT

plots the residual autocorrelation functions. The sample autocorrelation, the sample inverse autocorrelation, and the sample partial autocorrelation functions of the model residuals are plotted.

Q=order

Q=(lag, ..., lag) ... (lag, ..., lag)

specifies the moving-average part of the model. By default, no moving-average part is included in the model.

$Q=(l_1, l_2, \dots, l_k)$ defines a model with moving-average parameters at the specified lags. $Q=order$ is equivalent to $Q=(1, 2, \dots, order)$. A concatenation of parenthesized lists specifies a factored model. The interpretation of factors and lags is the same as for the $P=$ option.

WHITENOISE=ST | IGNOREMISS

specifies the type of test statistic that is used in the white noise test of the series when the series contains missing values. If $WHITENOISE=IGNOREMISS$, the standard Ljung-Box test statistic is used. If $WHITENOISE=ST$, a modification of this statistic suggested by Stoffer and Tolo (1992) is used. The default is $WHITENOISE=ST$.

Options for Output Data Sets

The following options are used to store results in SAS data sets:

OUTEST=SAS-data-set

writes the parameter estimates to an output data set. If the **OUTCORR** or **OUTCOV** option is used, the correlations or covariances of the estimates are also written to the **OUTEST=** data set. See the section “[OUTEST= Data Set](#)” on page 266 for a description of the **OUTEST=** output data set.

OUTCORR

writes the correlations of the parameter estimates to the **OUTEST=** data set.

OUTCOV

writes the covariances of the parameter estimates to the **OUTEST=** data set.

OUTMODEL=SAS-data-set

writes the model and parameter estimates to an output data set. If **OUTMODEL=** is not specified, no model output data set is created. See the section “[OUTMODEL= SAS Data Set](#)” on page 268 for a description of the **OUTMODEL=** output data set.

OUTSTAT=SAS-data-set

writes the model diagnostic statistics to an output data set. If **OUTSTAT=** is not specified, no statistics output data set is created. See the section “[OUTSTAT= Data Set](#)” on page 269 for a description of the **OUTSTAT=** output data set.

Options to Specify Parameter Values

The following options enable you to specify values for the model parameters. These options can provide starting values for the estimation process, or you can specify fixed parameters for use in the **FORECAST** stage and suppress the estimation process with the **NOEST** option. By default, the ARIMA procedure finds initial parameter estimates and uses these estimates as starting values in the iterative estimation process.

If values for any parameters are specified, values for all parameters should be given. The number of values given must agree with the model specifications.

AR=value ...

lists starting values for the autoregressive parameters. See the section “[Initial Values](#)” on page 256 for more information.

INITVAL=(initializer-spec variable ...)

specifies starting values for the parameters in the transfer function parts of the model. See the section “[Initial Values](#)” on page 256 for more information.

MA=value ...

lists starting values for the moving-average parameters. See the section “[Initial Values](#)” on page 256 for more information.

MU=value

specifies the MU parameter.

NOEST

uses the values specified with the AR=, MA=, INITVAL=, and MU= options as final parameter values. The estimation process is suppressed except for estimation of the residual variance. The specified parameter values are used directly by the next FORECAST statement. When NOEST is specified, standard errors, *t* values, and the correlations between estimates are displayed as 0 or missing. (The NOEST option is useful, for example, when you want to generate forecasts that correspond to a published model.)

Options to Control the Iterative Estimation Process

The following options can be used to control the iterative process of minimizing the error sum of squares or maximizing the log-likelihood function. These tuning options are not usually needed but can be useful if convergence problems arise.

BACKLIM=-*n*

omits the specified number of initial residuals from the sum of squares or likelihood function. Omitting values can be useful for suppressing transients in transfer function models that are sensitive to start-up values.

CONVERGE=value

specifies the convergence criterion. Convergence is assumed when the largest change in the estimate for any parameter is less than the CONVERGE= option value. If the absolute value of the parameter estimate is greater than 0.01, the relative change is used; otherwise, the absolute change in the estimate is used. The default is CONVERGE=0.001.

DELTA=value

specifies the perturbation value for computing numerical derivatives. The default is DELTA=0.001.

GRID

prints the error sum of squares (SSE) or concentrated log-likelihood surface in a small grid of the parameter space around the final estimates. For each pair of parameters, the SSE is printed for the

nine parameter-value combinations formed by the grid, with a center at the final estimates and with spacing given by the GRIDVAL= specification. The GRID option can help you judge whether the estimates are truly at the optimum, since the estimation process does not always converge. For models with a large number of parameters, the GRID option produces voluminous output.

GRIDVAL=number

controls the spacing in the grid printed by the GRID option. The default is GRIDVAL=0.005.

MAXITER=n

MAXIT=n

specifies the maximum number of iterations allowed. The default is MAXITER=50.

NOLS

begins the maximum likelihood or unconditional least squares iterations from the preliminary estimates rather than from the conditional least squares estimates that are produced after four iterations. See the section “[Estimation Details](#)” on page 250 for more information.

NOSTABLE

specifies that the autoregressive and moving-average parameter estimates for the noise part of the model not be restricted to the stationary and invertible regions, respectively. See the section “[Stationarity and Invertibility](#)” on page 257 for more information.

PRINTALL

prints preliminary estimation results and the iterations in the final estimation process.

NOTFSTABLE

specifies that the parameter estimates for the denominator polynomial of the transfer function part of the model not be restricted to the stability region. See the section “[Stationarity and Invertibility](#)” on page 257 for more information.

SINGULAR=value

specifies the criterion for checking singularity. If a pivot of a sweep operation is less than the SINGULAR= value, the matrix is deemed singular. Sweep operations are performed on the Jacobian matrix during final estimation and on the covariance matrix when preliminary estimates are obtained. The default is SINGULAR=1E-7.

OUTLIER Statement

OUTLIER options ;

The OUTLIER statement can be used to detect shifts in the level of the response series that are not accounted for by the previously estimated model. An ESTIMATE statement must precede the OUTLIER statement. The following options are used in the OUTLIER statement:

TYPE=ADDITIVE

TYPE=SHIFT

TYPE=TEMP (d_1, \dots, d_k)

TYPE=(**< ADDITIVE >****< SHIFT >** **< TEMP** (d_1, \dots, d_k) **>**

specifies the types of level shifts to search for. The default is TYPE=(ADDITIVE SHIFT), which requests searching for additive outliers and permanent level shifts. The option

TEMP(d_1, \dots, d_k) requests searching for temporary changes in the level of durations d_1, \dots, d_k .

These options can also be abbreviated as AO, LS, and TC.

ALPHA=*significance-level*

specifies the significance level for tests in the OUTLIER statement. The default is 0.05.

SIGMA=ROBUST | MSE

specifies the type of error variance estimate to use in the statistical tests performed during the outlier detection. SIGMA=MSE corresponds to the usual mean squared error (MSE) estimate, and SIGMA=ROBUST corresponds to a robust estimate of the error variance. The default is SIGMA=ROBUST.

MAXNUM=*number*

limits the number of outliers to search. The default is MAXNUM=5.

MAXPCT=*number*

limits the number of outliers to search for according to a percentage of the series length. The default is MAXPCT=2. When both the MAXNUM= and MAXPCT= options are specified, the minimum of the two search numbers is used.

ID=*Date-Time ID variable*

specifies a SAS date, time, or datetime identification variable to label the detected outliers. This variable must be present in the input data set.

The following examples illustrate a few possibilities for the OUTLIER statement.

The most basic usage, shown as follows, sets all the options to their default values.

```
outlier;
```

That is, it is equivalent to

```
outlier type=(ao ls) alpha=0.05 sigma=robust maxnum=5 maxpct=2;
```

The following statement requests a search for permanent level shifts and for temporary level changes of durations 6 and 12. The search is limited to at most three changes and the significance level of the underlying tests is 0.001. MSE is used as the estimate of error variance. It also requests labeling of the detected shifts using an ID variable *date*.

```
outlier type=(ls tc(6 12)) alpha=0.001 sigma=mse maxnum=3 ID=date;
```

FORECAST Statement

FORECAST *options* ;

The FORECAST statement generates forecast values for a time series by using the parameter estimates produced by the previous ESTIMATE statement. See the section “[Forecasting Details](#)” on page 259 for more information about calculating forecasts.

The following options can be used in the FORECAST statement:

ALIGN=*option*

controls the alignment of SAS dates used to identify output observations. The ALIGN= option allows the following values: BEGINNING|BEG|B, MIDDLE|MID|M, and ENDING|END|E. BEGINNING is the default.

ALPHA=*n*

sets the size of the forecast confidence limits. The ALPHA= value must be between 0 and 1. When you specify ALPHA= α , the upper and lower confidence limits have a $1 - \alpha$ confidence level. The default is ALPHA=0.05, which produces 95% confidence intervals. ALPHA values are rounded to the nearest hundredth.

BACK=*n*

specifies the number of observations before the end of the data where the multistep forecasts are to begin. The BACK= option value must be less than or equal to the number of observations minus the number of parameters.

The default is BACK=0, which means that the forecast starts at the end of the available data. The end of the data is the last observation for which a noise value can be calculated. If there are no input series, the end of the data is the last nonmissing value of the response time series. If there are input series, this observation can precede the last nonmissing value of the response variable, since there may be missing values for some of the input series.

ID=*variable*

names a variable in the input data set that identifies the time periods associated with the observations. The ID= variable is used in conjunction with the INTERVAL= option to extrapolate ID values from the end of the input data to identify forecast periods in the OUT= data set.

If the INTERVAL= option specifies an interval type, the ID variable must be a SAS date or datetime variable with the spacing between observations indicated by the INTERVAL= value. If the INTERVAL= option is not used, the last input value of the ID= variable is incremented by one for each forecast period to extrapolate the ID values for forecast observations.

INTERVAL=*interval*

INTERVAL=*n*

specifies the time interval between observations. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for information about valid INTERVAL= values.

The value of the INTERVAL= option is used by PROC ARIMA to extrapolate the ID values for forecast observations and to check that the input data are in order with no missing periods. See the section “[Specifying Series Periodicity](#)” on page 261 for more details.

LEAD=*n*

specifies the number of multistep forecast values to compute. For example, if LEAD=10, PROC ARIMA forecasts for ten periods beginning with the end of the input series (or earlier if BACK= is specified). It is possible to obtain fewer than the requested number of forecasts if a transfer function model is specified and insufficient data are available to compute the forecast. The default is LEAD=24.

NOOUTALL

includes only the final forecast observations in the OUT= output data set, not the one-step forecasts for the data before the forecast period.

NOPRINT

suppresses the normal printout of the forecast and associated values.

OUT=*SAS-data-set*

writes the forecast (and other values) to an output data set. If OUT= is not specified, the OUT= data set specified in the PROC ARIMA statement is used. If OUT= is also not specified in the PROC ARIMA statement, no output data set is created. See the section “OUT= Data Set” on page 264 for more information.

PRINTALL

prints the FORECAST computation throughout the whole data set. The forecast values for the data before the forecast period (specified by the BACK= option) are one-step forecasts.

SIGSQ=*value*

specifies the variance term used in the formula for computing forecast standard errors and confidence limits. The default value is the variance estimate computed by the preceding ESTIMATE statement. This option is useful when you wish to generate forecast standard errors and confidence limits based on a published model. It would often be used in conjunction with the NOEST option in the preceding ESTIMATE statement.

Details: ARIMA Procedure

The Inverse Autocorrelation Function

The sample inverse autocorrelation function (SIACF) plays much the same role in ARIMA modeling as the sample partial autocorrelation function (SPACF), but it generally indicates subset and seasonal autoregressive models better than the SPACF.

Additionally, the SIACF can be useful for detecting over-differencing. If the data come from a nonstationary or nearly nonstationary model, the SIACF has the characteristics of a noninvertible moving-average. Likewise, if the data come from a model with a noninvertible moving average, then the SIACF has nonstationary characteristics and therefore decays slowly. In particular, if the data have been over-differenced, the SIACF looks like a SACF from a nonstationary process.

The inverse autocorrelation function is not often discussed in textbooks, so a brief description is given here. More complete discussions can be found in Cleveland (1972), Chatfield (1980), and Priestly (1981).

Let W_t be generated by the ARMA(p, q) process

$$\phi(B)W_t = \theta(B)a_t$$

where a_t is a white noise sequence. If $\theta(B)$ is invertible (that is, if θ considered as a polynomial in B has no roots less than or equal to 1 in magnitude), then the model

$$\theta(B)Z_t = \phi(B)a_t$$

is also a valid ARMA(q, p) model. This model is sometimes referred to as the dual model. The autocorrelation function (ACF) of this dual model is called the inverse autocorrelation function (IACF) of the original model.

Notice that if the original model is a pure autoregressive model, then the IACF is an ACF that corresponds to a pure moving-average model. Thus, it cuts off sharply when the lag is greater than p ; this behavior is similar to the behavior of the partial autocorrelation function (PACF).

The sample inverse autocorrelation function (SIACF) is estimated in the ARIMA procedure by the following steps. A high-order autoregressive model is fit to the data by means of the Yule-Walker equations. The order of the autoregressive model used to calculate the SIACF is the minimum of the NLAG= value and one-half the number of observations after differencing. The SIACF is then calculated as the autocorrelation function that corresponds to this autoregressive operator when treated as a moving-average operator. That is, the autoregressive coefficients are convolved with themselves and treated as autocovariances.

Under certain conditions, the sampling distribution of the SIACF can be approximated by the sampling distribution of the SACF of the dual model (Bhansali 1980). In the plots generated by ARIMA, the confidence limit marks (.) are located at $\pm 2/\sqrt{n}$. These limits bound an approximate 95% confidence interval for the hypothesis that the data are from a white noise process.

The Partial Autocorrelation Function

The approximation for a standard error for the estimated partial autocorrelation function at lag k is based on a null hypothesis that a pure autoregressive Gaussian process of order $k-1$ generated the time series. This standard error is $1/\sqrt{n}$ and is used to produce the approximate 95% confidence intervals depicted by the dots in the plot.

The Cross-Correlation Function

The autocorrelation and partial and inverse autocorrelation functions described in the preceding sections help when you want to model a series as a function of its past values and past random errors. When you want to include the effects of past and current values of other series in the model, the correlations of the response series and the other series must be considered.

The CROSSCORR= option in the IDENTIFY statement computes cross-correlations of the VAR= series with other series and makes these series available for use as inputs in models specified by later ESTIMATE statements.

When the CROSSCORR= option is used, PROC ARIMA prints a plot of the cross-correlation function for each variable in the CROSSCORR= list. This plot is similar in format to the other correlation plots, but it shows the correlation between the two series at both lags and leads. For example,

```
identify var=y crosscorr=x ...;
```

plots the cross-correlation function of Y and X, $\text{Cor}(y_t, x_{t-s})$, for $s = -L$ to L , where L is the value of the NLAG= option. Study of the cross-correlation functions can indicate the transfer functions through which the input series should enter the model for the response series.

The cross-correlation function is computed after any specified differencing has been done. If differencing is specified for the VAR= variable or for a variable in the CROSSCORR= list, it is the differenced series that is cross-correlated (and the differenced series is processed by any following ESTIMATE statement).

For example,

```
identify var=y(1) crosscorr=x(1);
```

computes the cross-correlations of the changes in Y with the changes in X. When differencing is specified, the subsequent ESTIMATE statement models changes in the variables rather than the variables themselves.

The ESACF Method

The extended sample autocorrelation function (ESACF) method can tentatively identify the orders of a *stationary or nonstationary* ARMA process based on iterated least squares estimates of the autoregressive parameters. Tsay and Tiao (1984) proposed the technique, and Choi (1992) provides useful descriptions of the algorithm.

Given a stationary or nonstationary time series $\{z_t : 1 \leq t \leq n\}$ with mean corrected form $\tilde{z}_t = z_t - \mu_z$ with a true autoregressive order of $p + d$ and with a true moving-average order of q , you can use the ESACF method to estimate the unknown orders $p + d$ and q by analyzing the autocorrelation functions associated with filtered series of the form

$$w_t^{(m,j)} = \hat{\Phi}_{(m,j)}(B)\tilde{z}_t = \tilde{z}_t - \sum_{i=1}^m \hat{\phi}_i^{(m,j)} \tilde{z}_{t-i}$$

where B represents the backshift operator, where $m = p_{min}, \dots, p_{max}$ are the autoregressive *test* orders, where $j = q_{min} + 1, \dots, q_{max} + 1$ are the moving-average *test* orders, and where $\hat{\phi}_i^{(m,j)}$ are the autoregressive parameter estimates under the assumption that the series is an $\text{ARMA}(m, j)$ process.

For purely autoregressive models ($j = 0$), ordinary least squares (OLS) is used to consistently estimate $\hat{\phi}_i^{(m,0)}$. For ARMA models, consistent estimates are obtained by the iterated least squares recursion formula,

which is initiated by the pure autoregressive estimates:

$$\hat{\phi}_i^{(m,j)} = \hat{\phi}_i^{(m+1,j-1)} - \hat{\phi}_{i-1}^{(m,j-1)} \frac{\hat{\phi}_{m+1}^{(m+1,j-1)}}{\hat{\phi}_m^{(m,j-1)}}$$

The j th lag of the sample autocorrelation function of the filtered series $w_t^{(m,j)}$ is the *extended sample autocorrelation function*, and it is denoted as $r_{j(m)} = r_j(w^{(m,j)})$.

The standard errors of $r_{j(m)}$ are computed in the usual way by using Bartlett's approximation of the variance of the sample autocorrelation function, $\text{var}(r_{j(m)}) \approx (1 + \sum_{t=1}^{j-1} r_j^2(w^{(m,j)}))$.

If the true model is an ARMA $(p+d, q)$ process, the filtered series $w_t^{(m,j)}$ follows an MA(q) model for $j \geq q$ so that

$$r_{j(p+d)} \approx 0 \quad j > q$$

$$r_{j(p+d)} \neq 0 \quad j = q$$

Additionally, Tsay and Tiao (1984) show that the extended sample autocorrelation satisfies

$$r_{j(m)} \approx 0 \quad j - q > m - p - d \leq 0$$

$$r_{j(m)} \neq c(m - p - d, j - q) \quad 0 \leq j - q \leq m - p - d$$

where $c(m - p - d, j - q)$ is a nonzero constant or a continuous random variable bounded by -1 and 1 .

An ESACF table is then constructed by using the $r_{j(m)}$ for $m = p_{\min}, \dots, p_{\max}$ and $j = q_{\min} + 1, \dots, q_{\max} + 1$ to identify the ARMA orders (see Table 7.4). The orders are tentatively identified by finding a right (maximal) triangular pattern with vertices located at $(p+d, q)$ and $(p+d, q_{\max})$ and in which all elements are insignificant (based on asymptotic normality of the autocorrelation function). The vertex $(p+d, q)$ identifies the order. Table 7.5 depicts the theoretical pattern associated with an ARMA(1,2) series.

Table 7.4 ESACF Table

	MA					
AR	0	1	2	3	.	.
0	$r_1(0)$	$r_2(0)$	$r_3(0)$	$r_4(0)$.	.
1	$r_1(1)$	$r_2(1)$	$r_3(1)$	$r_4(1)$.	.
2	$r_1(2)$	$r_2(2)$	$r_3(2)$	$r_4(2)$.	.
3	$r_1(3)$	$r_2(3)$	$r_3(3)$	$r_4(3)$.	.
.
.

Table 7.5 Theoretical ESACF Table for an ARMA(1,2) Series

	MA							
AR	0	1	2	3	4	5	6	7
0	*	X	X	X	X	X	X	X
1	*	X	0	0	0	0	0	0
2	*	X	X	0	0	0	0	0
3	*	X	X	X	0	0	0	0
4	*	X	X	X	X	0	0	0
	X = significant terms 0 = insignificant terms * = no pattern							

The MINIC Method

The minimum information criterion (MINIC) method can tentatively identify the order of a *stationary and invertible* ARMA process. Note that Hannan and Rissanen (1982) proposed this method, and Box, Jenkins, and Reinsel (1994) and Choi (1992) provide useful descriptions of the algorithm.

Given a stationary and invertible time series $\{z_t : 1 \leq t \leq n\}$ with mean corrected form $\tilde{z}_t = z_t - \mu_z$ with a true autoregressive order of p and with a true moving-average order of q , you can use the MINIC method to compute information criteria (or penalty functions) for various autoregressive and moving average orders. The following paragraphs provide a brief description of the algorithm.

If the series is a stationary and invertible ARMA(p, q) process of the form

$$\Phi_{(p,q)}(B)\tilde{z}_t = \Theta_{(p,q)}(B)\epsilon_t$$

the error series can be approximated by a high-order AR process

$$\hat{\epsilon}_t = \hat{\Phi}_{(p_\epsilon, q)}(B)\tilde{z}_t \approx \epsilon_t$$

where the parameter estimates $\hat{\Phi}_{(p_\epsilon, q)}$ are obtained from the Yule-Walker estimates. The choice of the autoregressive order p_ϵ is determined by the order that minimizes the Akaike information criterion (AIC) in the range $p_{\epsilon, \min} \leq p_\epsilon \leq p_{\epsilon, \max}$

$$AIC(p_\epsilon, 0) = \ln(\tilde{\sigma}_{(p_\epsilon, 0)}^2) + 2(p_\epsilon + 0)/n$$

where

$$\tilde{\sigma}_{(p_\epsilon, 0)}^2 = \frac{1}{n} \sum_{t=p_\epsilon+1}^n \hat{\epsilon}_t^2$$

Note that Hannan and Rissanen (1982) use the Bayesian information criterion (BIC) to determine the autoregressive order used to estimate the error series. Box, Jenkins, and Reinsel (1994) and Choi (1992) recommend the AIC.

Once the error series has been estimated for autoregressive test order $m = p_{min}, \dots, p_{max}$ and for moving-average test order $j = q_{min}, \dots, q_{max}$, the OLS estimates $\hat{\Phi}_{(m,j)}$ and $\hat{\Theta}_{(m,j)}$ are computed from the regression model

$$\tilde{z}_t = \sum_{i=1}^m \phi_i^{(m,j)} \tilde{z}_{t-i} + \sum_{k=1}^j \theta_k^{(m,j)} \hat{\epsilon}_{t-k} + error$$

From the preceding parameter estimates, the BIC is then computed

$$BIC(m, j) = \ln(\tilde{\sigma}_{(m,j)}^2) + 2(m + j)\ln(n)/n$$

where

$$\tilde{\sigma}_{(m,j)}^2 = \frac{1}{n} \sum_{t=t_0}^n \left(\tilde{z}_t - \sum_{i=1}^m \phi_i^{(m,j)} \tilde{z}_{t-i} + \sum_{k=1}^j \theta_k^{(m,j)} \hat{\epsilon}_{t-k} \right)^2$$

where $t_0 = p_{\epsilon} + \max(m, j)$.

A MINIC table is then constructed using $BIC(m, j)$; see Table 7.6. If $p_{max} > p_{\epsilon, min}$, the preceding regression might fail due to linear dependence on the estimated error series and the mean-corrected series. Values of $BIC(m, j)$ that cannot be computed are set to missing. For large autoregressive and moving-average test orders with relatively few observations, a nearly perfect fit can result. This condition can be identified by a large negative $BIC(m, j)$ value.

Table 7.6 MINIC Table

AR	MA					
	0	1	2	3	.	.
0	$BIC(0, 0)$	$BIC(0, 1)$	$BIC(0, 2)$	$BIC(0, 3)$.	.
1	$BIC(1, 0)$	$BIC(1, 1)$	$BIC(1, 2)$	$BIC(1, 3)$.	.
2	$BIC(2, 0)$	$BIC(2, 1)$	$BIC(2, 2)$	$BIC(2, 3)$.	.
3	$BIC(3, 0)$	$BIC(3, 1)$	$BIC(3, 2)$	$BIC(3, 3)$.	.
.
.

The SCAN Method

The smallest canonical (SCAN) correlation method can tentatively identify the orders of a *stationary or nonstationary* ARMA process. Tsay and Tiao (1985) proposed the technique, and Box, Jenkins, and Reinsel (1994) and Choi (1992) provide useful descriptions of the algorithm.

Given a stationary or nonstationary time series $\{z_t : 1 \leq t \leq n\}$ with mean corrected form $\tilde{z}_t = z_t - \mu_z$ with a true autoregressive order of $p + d$ and with a true moving-average order of q , you can use the SCAN method to analyze eigenvalues of the correlation matrix of the ARMA process. The following paragraphs provide a brief description of the algorithm.

For autoregressive test order $m = p_{min}, \dots, p_{max}$ and for moving-average test order $j = q_{min}, \dots, q_{max}$, perform the following steps.

1. Let $Y_{m,t} = (\tilde{z}_t, \tilde{z}_{t-1}, \dots, \tilde{z}_{t-m})'$. Compute the following $(m+1) \times (m+1)$ matrix

$$\begin{aligned}\hat{\beta}(m, j+1) &= \left(\sum_t Y_{m,t-j-1} Y'_{m,t-j-1} \right)^{-1} \left(\sum_t Y_{m,t-j-1} Y'_{m,t} \right) \\ \hat{\beta}^*(m, j+1) &= \left(\sum_t Y_{m,t} Y'_{m,t} \right)^{-1} \left(\sum_t Y_{m,t} Y'_{m,t-j-1} \right) \\ \hat{A}^*(m, j) &= \hat{\beta}^*(m, j+1) \hat{\beta}(m, j+1)\end{aligned}$$

where t ranges from $j+m+2$ to n .

2. Find the *smallest* eigenvalue, $\hat{\lambda}^*(m, j)$, of $\hat{A}^*(m, j)$ and its corresponding *normalized* eigenvector, $\Phi_{m,j} = (1, -\phi_1^{(m,j)}, -\phi_2^{(m,j)}, \dots, -\phi_m^{(m,j)})$. The squared canonical correlation estimate is $\hat{\lambda}^*(m, j)$.
3. Using the $\Phi_{m,j}$ as AR(m) coefficients, obtain the residuals for $t = j+m+1$ to n , by following the formula: $w_t^{(m,j)} = \tilde{z}_t - \phi_1^{(m,j)} \tilde{z}_{t-1} - \phi_2^{(m,j)} \tilde{z}_{t-2} - \dots - \phi_m^{(m,j)} \tilde{z}_{t-m}$.
4. From the sample autocorrelations of the residuals, $r_k(w)$, approximate the standard error of the squared canonical correlation estimate by

$$var(\hat{\lambda}^*(m, j)^{1/2}) \approx d(m, j)/(n-m-j)$$

where $d(m, j) = (1 + 2 \sum_{i=1}^{j-1} r_k(w^{(m,j)}))$.

The test statistic to be used as an identification criterion is

$$c(m, j) = -(n-m-j) \ln(1 - \hat{\lambda}^*(m, j)/d(m, j))$$

which is asymptotically χ_1^2 if $m = p + d$ and $j \geq q$ or if $m \geq p + d$ and $j = q$. For $m > p$ and $j < q$, there is more than one theoretical zero canonical correlation between $Y_{m,t}$ and $Y_{m,t-j-1}$. Since the $\hat{\lambda}^*(m, j)$ are the smallest canonical correlations for each (m, j) , the percentiles of $c(m, j)$ are less than those of a χ_1^2 ; therefore, Tsay and Tiao (1985) state that it is safe to assume a χ_1^2 . For $m < p$ and $j < q$, no conclusions about the distribution of $c(m, j)$ are made.

A SCAN table is then constructed using $c(m, j)$ to determine which of the $\hat{\lambda}^*(m, j)$ are significantly different from zero (see Table 7.7). The ARMA orders are tentatively identified by finding a (maximal) rectangular pattern in which the $\hat{\lambda}^*(m, j)$ are insignificant for all test orders $m \geq p + d$ and $j \geq q$. There may be more than one pair of values $(p + d, q)$ that permit such a rectangular pattern. In this case, parsimony and the number of insignificant items in the rectangular pattern should help determine the model order. Table 7.8 depicts the theoretical pattern associated with an ARMA(2,2) series.

Table 7.7 SCAN Table

AR	MA					
	0	1	2	3	.	.
0	$c(0, 0)$	$c(0, 1)$	$c(0, 2)$	$c(0, 3)$.	.
1	$c(1, 0)$	$c(1, 1)$	$c(1, 2)$	$c(1, 3)$.	.
2	$c(2, 0)$	$c(2, 1)$	$c(2, 2)$	$c(2, 3)$.	.
3	$c(3, 0)$	$c(3, 1)$	$c(3, 2)$	$c(3, 3)$.	.
.
.

Table 7.8 Theoretical SCAN Table for an ARMA(2,2) Series

AR	MA							
	0	1	2	3	4	5	6	7
0	*	X	X	X	X	X	X	X
1	*	X	X	X	X	X	X	X
2	*	X	0	0	0	0	0	0
3	*	X	0	0	0	0	0	0
4	*	X	0	0	0	0	0	0
X = significant terms 0 = insignificant terms * = no pattern								

Stationarity Tests

When a time series has a unit root, the series is nonstationary and the ordinary least squares (OLS) estimator is not normally distributed. Dickey (1976) and Dickey and Fuller (1979) studied the limiting distribution of the OLS estimator of autoregressive models for time series with a simple unit root. Dickey, Hasza, and Fuller (1984) obtained the limiting distribution for time series with seasonal unit roots. Hamilton (1994) discusses the various types of unit root testing.

For a description of Dickey-Fuller tests, see the section “[PROBDF Function for Dickey-Fuller Tests](#)” on page 162 in [Chapter 5](#). See Chapter 8, “[The AUTOREG Procedure](#),” for a description of Phillips-Perron tests.

The random-walk-with-drift test recommends whether or not an integrated times series has a drift term. Hamilton (1994) discusses this test.

Prewhitening

If, as is usually the case, an input series is autocorrelated, the direct cross-correlation function between the input and response series gives a misleading indication of the relation between the input and response series.

One solution to this problem is called *prewhitening*. You first fit an ARIMA model for the input series sufficient to reduce the residuals to white noise; then, filter the input series with this model to get the white noise residual series. You then filter the response series with the same model and cross-correlate the filtered response with the filtered input series.

The ARIMA procedure performs this prewhitening process automatically when you precede the IDENTIFY statement for the response series with IDENTIFY and ESTIMATE statements to fit a model for the input series. If a model with no inputs was previously fit to a variable specified by the CROSSCORR= option, then that model is used to prewhiten both the input series and the response series before the cross-correlations are computed for the input series.

For example,

```
proc arima data=in;
    identify var=x;
    estimate p=1 q=1;
    identify var=y crosscorr=x;
run;
```

Both X and Y are filtered by the ARMA(1,1) model fit to X before the cross-correlations are computed.

Note that prewhitening is done to estimate the cross-correlation function; the unfiltered series are used in any subsequent ESTIMATE or FORECAST statements, and the correlation functions of Y with its own lags are computed from the unfiltered Y series. But initial values in the ESTIMATE statement are obtained with prewhitened data; therefore, the result with prewhitening can be different from the result without prewhitening.

To suppress prewhitening for all input variables, use the CLEAR option in the IDENTIFY statement to make PROC ARIMA disregard all previous models.

Prewhitening and Differencing

If the VAR= and CROSSCORR= options specify differencing, the series are differenced before the prewhitening filter is applied. When the differencing lists specified in the VAR= option for an input and in the CROSSCORR= option for that input are not the same, PROC ARIMA combines the two lists so that the differencing operators used for prewhitening include all differences in either list (in the least common multiple sense).

Identifying Transfer Function Models

When identifying a transfer function model with multiple input variables, the cross-correlation functions can be misleading if the input series are correlated with each other. Any dependencies among two or more input series will confound their cross-correlations with the response series.

The prewhitening technique assumes that the input variables do not depend on past values of the response variable. If there is feedback from the response variable to an input variable, as evidenced by significant

cross-correlation at negative lags, both the input and the response variables need to be prewhitened before meaningful cross-correlations can be computed.

PROC ARIMA cannot handle feedback models. The STATESPACE and VARMAX procedures are more appropriate for models with feedback.

Missing Values and Autocorrelations

To compute the sample autocorrelation function when missing values are present, PROC ARIMA uses only crossproducts that do not involve missing values and employs divisors that reflect the number of crossproducts used rather than the total length of the series. Sample partial autocorrelations and inverse autocorrelations are then computed by using the sample autocorrelation function. If necessary, a taper is employed to transform the sample autocorrelations into a positive definite sequence before calculating the partial autocorrelation and inverse correlation functions. The confidence intervals produced for these functions might not be valid when there are missing values. The distributional properties for sample correlation functions are not clear for finite samples. See Dunsmuir (1984) for some asymptotic properties of the sample correlation functions.

Estimation Details

The ARIMA procedure primarily uses the computational methods outlined by Box and Jenkins. Marquardt's method is used for the nonlinear least squares iterations. Numerical approximations of the derivatives of the sum-of-squares function are taken by using a fixed delta (controlled by the DELTA= option).

The methods do not always converge successfully for a given set of data, particularly if the starting values for the parameters are not close to the least squares estimates.

Back-Forecasting

The unconditional sum of squares is computed exactly; thus, back-forecasting is not performed. Early versions of SAS/ETS software used the back-forecasting approximation and allowed a positive value of the BACKLIM= option to control the extent of the back-forecasting. In the current version, requesting a positive number of back-forecasting steps with the BACKLIM= option has no effect.

Preliminary Estimation

If an autoregressive or moving-average operator is specified with no missing lags, preliminary estimates of the parameters are computed by using the autocorrelations computed in the IDENTIFY stage. Otherwise, the preliminary estimates are arbitrarily set to values that produce stable polynomials.

When preliminary estimation is not performed by PROC ARIMA, then initial values of the coefficients for any given autoregressive or moving-average factor are set to 0.1 if the degree of the polynomial associated

with the factor is 9 or less. Otherwise, the coefficients are determined by expanding the polynomial $(1 - 0.1B)$ to an appropriate power by using a recursive algorithm.

These preliminary estimates are the starting values in an iterative algorithm to compute estimates of the parameters.

Estimation Methods

Maximum Likelihood

The METHOD=ML option produces maximum likelihood estimates. The likelihood function is maximized via nonlinear least squares using Marquardt's method. Maximum likelihood estimates are more expensive to compute than the conditional least squares estimates; however, they may be preferable in some cases (Ansley and Newbold 1980; Davidson 1981).

The maximum likelihood estimates are computed as follows. Let the univariate ARMA model be

$$\phi(B)(W_t - \mu_t) = \theta(B)a_t$$

where a_t is an independent sequence of normally distributed innovations with mean 0 and variance σ^2 . Here μ_t is the mean parameter μ plus the transfer function inputs. The log-likelihood function can be written as follows:

$$-\frac{1}{2\sigma^2}\mathbf{x}'\mathbf{\Omega}^{-1}\mathbf{x} - \frac{1}{2}\ln(|\mathbf{\Omega}|) - \frac{n}{2}\ln(\sigma^2)$$

In this equation, n is the number of observations, $\sigma^2\mathbf{\Omega}$ is the variance of \mathbf{x} as a function of the ϕ and θ parameters, and $|\mathbf{\Omega}|$ denotes the determinant. The vector \mathbf{x} is the time series W_t minus the structural part of the model μ_t , written as a column vector, as follows:

$$\mathbf{x} = \begin{bmatrix} W_1 \\ W_2 \\ \vdots \\ W_n \end{bmatrix} - \begin{bmatrix} \mu_1 \\ \mu_2 \\ \vdots \\ \mu_n \end{bmatrix}$$

The maximum likelihood estimate (MLE) of σ^2 is

$$s^2 = \frac{1}{n}\mathbf{x}'\mathbf{\Omega}^{-1}\mathbf{x}$$

Note that the default estimator of the variance divides by $n - r$, where r is the number of parameters in the model, instead of by n . Specifying the NODF option causes a divisor of n to be used.

The log-likelihood concentrated with respect to σ^2 can be taken up to additive constants as

$$-\frac{n}{2}\ln(\mathbf{x}'\mathbf{\Omega}^{-1}\mathbf{x}) - \frac{1}{2}\ln(|\mathbf{\Omega}|)$$

Let \mathbf{H} be the lower triangular matrix with positive elements on the diagonal such that $\mathbf{H}\mathbf{H}' = \mathbf{\Omega}$. Let \mathbf{e} be the vector $\mathbf{H}^{-1}\mathbf{x}$. The concentrated log-likelihood with respect to σ^2 can now be written as

$$-\frac{n}{2}\ln(\mathbf{e}'\mathbf{e}) - \ln(|\mathbf{H}|)$$

or

$$-\frac{n}{2} \ln(|\mathbf{H}|^{1/n} \mathbf{e}' \mathbf{e} |\mathbf{H}|^{1/n})$$

The MLE is produced by using a Marquardt algorithm to minimize the following sum of squares:

$$|\mathbf{H}|^{1/n} \mathbf{e}' \mathbf{e} |\mathbf{H}|^{1/n}$$

The subsequent analysis of the residuals is done by using \mathbf{e} as the vector of residuals.

Unconditional Least Squares

The METHOD=ULS option produces unconditional least squares estimates. The ULS method is also referred to as the *exact least squares* (ELS) method. For METHOD=ULS, the estimates minimize

$$\sum_{t=1}^n \tilde{a}_t^2 = \sum_{t=1}^n (x_t - \mathbf{C}_t \mathbf{V}_t^{-1} (x_1, \dots, x_{t-1})')^2$$

where \mathbf{C}_t is the covariance matrix of x_t and (x_1, \dots, x_{t-1}) , and \mathbf{V}_t is the variance matrix of (x_1, \dots, x_{t-1}) . In fact, $\sum_{t=1}^n \tilde{a}_t^2$ is the same as $\mathbf{x}' \boldsymbol{\Omega}^{-1} \mathbf{x}$, and hence $\mathbf{e}' \mathbf{e}$. Therefore, the unconditional least squares estimates are obtained by minimizing the sum of squared residuals rather than using the log-likelihood as the criterion function.

Conditional Least Squares

The METHOD=CLS option produces conditional least squares estimates. The CLS estimates are conditional on the assumption that the past unobserved errors are equal to 0. The series x_t can be represented in terms of the previous observations, as follows:

$$x_t = a_t + \sum_{i=1}^{\infty} \pi_i x_{t-i}$$

The π weights are computed from the ratio of the ϕ and θ polynomials, as follows:

$$\frac{\phi(B)}{\theta(B)} = 1 - \sum_{i=1}^{\infty} \pi_i B^i$$

The CLS method produces estimates minimizing

$$\sum_{t=1}^n \hat{a}_t^2 = \sum_{t=1}^n (x_t - \sum_{i=1}^{\infty} \hat{\pi}_i x_{t-i})^2$$

where the unobserved past values of x_t are set to 0 and $\hat{\pi}_i$ are computed from the estimates of ϕ and θ at each iteration.

For METHOD=ULS and METHOD=ML, initial estimates are computed using the METHOD=CLS algorithm.

Start-up for Transfer Functions

When computing the noise series for transfer function and intervention models, the start-up for the transferred variable is done by assuming that past values of the input series are equal to the first value of the series. The estimates are then obtained by applying least squares or maximum likelihood to the noise series. Thus, for transfer function models, the ML option does not generate the full (multivariate ARMA) maximum likelihood estimates, but it uses only the univariate likelihood function applied to the noise series.

Because PROC ARIMA uses all of the available data for the input series to generate the noise series, other start-up options for the transferred series can be implemented by prefixing an observation to the beginning of the real data. For example, if you fit a transfer function model to the variable Y with the single input X, then you can employ a start-up using 0 for the past values by prefixing to the actual data an observation with a missing value for Y and a value of 0 for X.

Information Criteria

PROC ARIMA computes and prints two information criteria, Akaike's information criterion (AIC) (Akaike 1974; Harvey 1981) and Schwarz's Bayesian criterion (SBC) (Schwarz 1978). The AIC and SBC are used to compare competing models fit to the same series. The model with the smaller information criteria is said to fit the data better. The AIC is computed as

$$-2\ln(L) + 2k$$

where L is the likelihood function and k is the number of free parameters. The SBC is computed as

$$-2\ln(L) + \ln(n)k$$

where n is the number of residuals that can be computed for the time series. Sometimes Schwarz's Bayesian criterion is called the Bayesian information criterion (BIC).

If METHOD=CLS is used to do the estimation, an approximation value of L is used, where L is based on the conditional sum of squares instead of the exact sum of squares, and a Jacobian factor is left out.

Tests of Residuals

A table of test statistics for the hypothesis that the model residuals are white noise is printed as part of the ESTIMATE statement output. The chi-square statistics used in the test for lack of fit are computed using the Ljung-Box formula

$$\chi_m^2 = n(n+2) \sum_{k=1}^m \frac{r_k^2}{(n-k)}$$

where

$$r_k = \frac{\sum_{t=1}^{n-k} a_t a_{t+k}}{\sum_{t=1}^n a_t^2}$$

and a_t is the residual series.

This formula has been suggested by Ljung and Box (1978) as yielding a better fit to the asymptotic chi-square distribution than the Box-Pierce Q statistic. Some simulation studies of the finite sample properties of this statistic are given by Davies, Triggs, and Newbold (1977) and by Ljung and Box (1978). When the time series has missing values, Stoffer and Tolo (1992) suggest a modification of this test statistic that has improved distributional properties over the standard Ljung-Box formula given above. When the series contains missing values, this modified test statistic is used by default.

Each chi-square statistic is computed for all lags up to the indicated lag value and is not independent of the preceding chi-square values. The null hypotheses tested is that the current set of autocorrelations is white noise.

t-values

The t values reported in the table of parameter estimates are approximations whose accuracy depends on the validity of the model, the nature of the model, and the length of the observed series. When the length of the observed series is short and the number of estimated parameters is large with respect to the series length, the t approximation is usually poor. Probability values that correspond to a t distribution should be interpreted carefully because they may be misleading.

Cautions during Estimation

The ARIMA procedure uses a general nonlinear least squares estimation method that can yield problematic results if your data do not fit the model. Output should be examined carefully. The GRID option can be used to ensure the validity and quality of the results. Problems you might encounter include the following:

- Preliminary moving-average estimates might not converge. If this occurs, preliminary estimates are derived as described previously in “[Preliminary Estimation](#)” on page 250. You can supply your own preliminary estimates with the ESTIMATE statement options.
- The estimates can lead to an unstable time series process, which can cause extreme forecast values or overflows in the forecast.
- The Jacobian matrix of partial derivatives might be singular; usually, this happens because not all the parameters are identifiable. Removing some of the parameters or using a longer time series might help.
- The iterative process might not converge. PROC ARIMA’s estimation method stops after n iterations, where n is the value of the MAXITER= option. If an iteration does not improve the SSE, the Marquardt parameter is increased by a factor of ten until parameters that have a smaller SSE are obtained or until the limit value of the Marquardt parameter is exceeded.
- For METHOD=CLS, the estimates might converge but not to least squares estimates. The estimates might converge to a local minimum, the numerical calculations might be distorted by data whose sum-of-squares surface is not smooth, or the minimum might lie outside the region of invertibility or stationarity.

- If the data are differenced and a moving-average model is fit, the parameter estimates might try to converge exactly on the invertibility boundary. In this case, the standard error estimates that are based on derivatives might be inaccurate.

Specifying Inputs and Transfer Functions

Input variables and transfer functions for them can be specified using the INPUT= option in the ESTIMATE statement. The variables used in the INPUT= option must be included in the CROSSCORR= list in the previous IDENTIFY statement. If any differencing is specified in the CROSSCORR= list, then the differenced variable is used as the input to the transfer function.

General Syntax of the INPUT= Option

The general syntax of the INPUT= option is

ESTIMATE ... INPUT=(*transfer-function variable ...*)

The transfer function for an input variable is optional. The name of a variable by itself can be used to specify a pure regression term for the variable.

If specified, the syntax of the transfer function is

$S \ \$ \ (L_{1,1}, L_{1,2}, \dots)(L_{2,1}, \dots) \dots / (L_{i,1}, L_{i,2}, \dots)(L_{i+1,1}, \dots) \dots$

S is the number of periods of time delay (lag) for this input series. Each term in parentheses specifies a polynomial factor with parameters at the lags specified by the $L_{i,j}$ values. The terms before the slash (/) are numerator factors. The terms after the slash (/) are denominator factors. All three parts are optional.

Commas can optionally be used between input specifications to make the INPUT= option more readable. The \$ sign after the shift is also optional.

Except for the first numerator factor, each of the terms $L_{i,1}, L_{i,2}, \dots, L_{i,k}$ indicates a factor of the form

$$(1 - \omega_{i,1}B^{L_{i,1}} - \omega_{i,2}B^{L_{i,2}} - \dots - \omega_{i,k}B^{L_{i,k}})$$

The form of the first numerator factor depends on the ALTPARM option. By default, the constant 1 in the first numerator factor is replaced with a free parameter ω_0 .

Alternative Model Parameterization

When the ALTPARM option is specified, the ω_0 parameter is factored out so that it multiplies the entire transfer function, and the first numerator factor has the same form as the other factors.

The ALTPARM option does not materially affect the results; it just presents the results differently. Some people prefer to see the model written one way, while others prefer the alternative representation. Table 7.9 illustrates the effect of the ALTPARM option.

Table 7.9 The ALTPARM Option

INPUT= Option	ALTPARM	Model
INPUT=((1 2)(12)/(1)X);	No	$(\omega_0 - \omega_1 B - \omega_2 B^2)(1 - \omega_3 B^{12})/(1 - \delta_1 B)X_t$
	Yes	$\omega_0(1 - \omega_1 B - \omega_2 B^2)(1 - \omega_3 B^{12})/(1 - \delta_1 B)X_t$

Differencing and Input Variables

If you difference the response series and use input variables, take care that the differencing operations do not change the meaning of the model. For example, if you want to fit the model

$$Y_t = \frac{\omega_0}{(1 - \delta_1 B)} X_t + \frac{(1 - \theta_1 B)}{(1 - B)(1 - B^{12})} a_t$$

then the IDENTIFY statement must read

```
identify var=y(1,12) crosscorr=x(1,12);
estimate q=1 input=(/ (1)x) noconstant;
```

If instead you specify the differencing as

```
identify var=y(1,12) crosscorr=x;
estimate q=1 input=(/ (1)x) noconstant;
```

then the model being requested is

$$Y_t = \frac{\omega_0}{(1 - \delta_1 B)(1 - B)(1 - B^{12})} X_t + \frac{(1 - \theta_1 B)}{(1 - B)(1 - B^{12})} a_t$$

which is a very different model.

The point to remember is that a differencing operation requested for the response variable specified by the VAR= option is applied only to that variable and not to the noise term of the model.

Initial Values

The syntax for giving initial values to transfer function parameters in the INITVAL= option parallels the syntax of the INPUT= option. For each transfer function in the INPUT= option, the INITVAL= option should give an initialization specification followed by the input series name. The initialization specification for each transfer function has the form

$$C \$ (V_{1,1}, V_{1,2}, \dots)(V_{2,1}, \dots) \dots / (V_{i,1}, \dots) \dots$$

where C is the lag 0 term in the first numerator factor of the transfer function (or the overall scale factor if the ALTPARM option is specified) and $V_{i,j}$ is the coefficient of the $L_{i,j}$ element in the transfer function.

To illustrate, suppose you want to fit the model

$$Y_t = \mu + \frac{(\omega_0 - \omega_1 B - \omega_2 B^2)}{(1 - \delta_1 B - \delta_2 B^2 - \delta_3 B^3)} X_{t-3} + \frac{1}{(1 - \phi_1 B - \phi_2 B^3)} a_t$$

and start the estimation process with the initial values $\mu=10$, $\omega_0=1$, $\omega_1=0.5$, $\omega_2=0.03$, $\delta_1=0.8$, $\delta_2=-0.1$, $\delta_3=0.002$, $\phi_1=0.1$, $\phi_2=0.01$. (These are arbitrary values for illustration only.) You would use the following statements:

```
identify var=y crosscorr=x;
estimate p=(1,3) input=(3$(1,2)/(1,2,3)x)
mu=10 ar=.1 .01
initval=(1$(.5,.03)/(.8,-.1,.002)x);
```

Note that the lags specified for a particular factor are sorted, so initial values should be given in sorted order. For example, if the P= option had been entered as P=(3,1) instead of P=(1,3), the model would be the same and so would the AR= option. Sorting is done within all factors, including transfer function factors, so initial values should always be given in order of increasing lags.

Here is another illustration, showing initialization for a factored model with multiple inputs. The model is

$$Y_t = \mu + \frac{\omega_{1,0}}{(1 - \delta_{1,1} B)} W_t + (\omega_{2,0} - \omega_{2,1} B) X_{t-3} + \frac{1}{(1 - \phi_1 B)(1 - \phi_2 B^6 - \phi_3 B^{12})} a_t$$

and the initial values are $\mu=10$, $\omega_{1,0}=5$, $\delta_{1,1}=0.8$, $\omega_{2,0}=1$, $\omega_{2,1}=0.5$, $\phi_1=0.1$, $\phi_2=0.05$, and $\phi_3=0.01$. You would use the following statements:

```
identify var=y crosscorr=(w x);
estimate p=(1)(6,12) input=(/(1)w, 3$(1)x)
mu=10 ar=.1 .05 .01
initval=(5$/(.8)w 1$(.5)x);
```

Stationarity and Invertibility

By default, PROC ARIMA requires that the parameter estimates for the AR and MA parts of the model always remain in the stationary and invertible regions, respectively. The NOSTABLE option removes this restriction and for high-order models can save some computer time. Note that using the NOSTABLE option does not necessarily result in an unstable model being fit, since the estimates can leave the stable region for some iterations but still ultimately converge to stable values. Similarly, by default, the parameter estimates for the denominator polynomial of the transfer function part of the model are also restricted to be stable. The NOTFSTABLE option can be used to remove this restriction.

Naming of Model Parameters

In the table of parameter estimates produced by the ESTIMATE statement, model parameters are referred to by using the naming convention described in this section.

The parameters in the noise part of the model are named as $AR_{i,j}$ or $MA_{i,j}$, where AR refers to autoregressive parameters and MA to moving-average parameters. The subscript i refers to the particular polynomial factor, and the subscript j refers to the j th term within the i th factor. These terms are sorted in order of increasing lag within factors, so the subscript j refers to the j th term after sorting.

When inputs are used in the model, the parameters of each transfer function are named $NUM_{i,j}$ and $DEN_{i,j}$. The j th term in the i th factor of a numerator polynomial is named $NUM_{i,j}$. The j th term in the i th factor of a denominator polynomial is named $DEN_{i,j}$.

This naming process is repeated for each input variable, so if there are multiple inputs, parameters in transfer functions for different input series have the same name. The table of parameter estimates shows in the “Variable” column the input with which each parameter is associated. The parameter name shown in the “Parameter” column and the input variable name shown in the “Variable” column must be combined to fully identify transfer function parameters.

The lag 0 parameter in the first numerator factor for the first input variable is named NUM1. For subsequent input variables, the lag 0 parameter in the first numerator factor is named NUM_k , where k is the position of the input variable in the INPUT= option list. If the ALTPARM option is specified, the NUM_k parameter is replaced by an overall scale parameter named $SCALE_k$.

For the mean and noise process parameters, the response series name is shown in the “Variable” column. The lag and shift for each parameter are also shown in the table of parameter estimates when inputs are used.

Missing Values and Estimation and Forecasting

Estimation and forecasting are carried out in the presence of missing values by forecasting the missing values with the current set of parameter estimates. The maximum likelihood algorithm employed was suggested by Jones (1980) and is used for both unconditional least squares (ULS) and maximum likelihood (ML) estimation.

The CLS algorithm simply fills in missing values with infinite memory forecast values, computed by forecasting ahead from the nonmissing past values as far as required by the structure of the missing values. These artificial values are then employed in the nonmissing value CLS algorithm. Artificial values are updated at each iteration along with parameter estimates.

For models with input variables, embedded missing values (that is, missing values other than at the beginning or end of the series) are not generally supported. Embedded missing values in input variables are supported for the special case of a multiple regression model that has ARIMA errors. A multiple regression model is specified by an INPUT= option that simply lists the input variables (possibly with lag shifts) without any numerator or denominator transfer function factors. One-step-ahead forecasts are not available for

the response variable when one or more of the input variables have missing values.

When embedded missing values are present for a model with complex transfer functions, PROC ARIMA uses the first continuous nonmissing piece of each series to do the analysis. That is, PROC ARIMA skips observations at the beginning of each series until it encounters a nonmissing value and then uses the data from there until it encounters another missing value or until the end of the data is reached. This makes the current version of PROC ARIMA compatible with earlier releases that did not allow embedded missing values.

Forecasting Details

If the model has input variables, a forecast beyond the end of the data for the input variables is possible only if univariate ARIMA models have previously been fit to the input variables or future values for the input variables are included in the DATA= data set.

If input variables are used, the forecast standard errors and confidence limits of the response depend on the estimated forecast error variance of the predicted inputs. If several input series are used, the forecast errors for the inputs should be independent; otherwise, the standard errors and confidence limits for the response series will not be accurate. If future values for the input variables are included in the DATA= data set, the standard errors of the forecasts will be underestimated since these values are assumed to be known with certainty.

The forecasts are generated using forecasting equations consistent with the method used to estimate the model parameters. Thus, the estimation method specified in the ESTIMATE statement also controls the way forecasts are produced by the FORECAST statement. If METHOD=CLS is used, the forecasts are *infinite memory forecasts*, also called *conditional forecasts*. If METHOD=ULS or METHOD=ML, the forecasts are *finite memory forecasts*, also called *unconditional forecasts*. A complete description of the steps to produce the series forecasts and their standard errors by using either of these methods is quite involved, and only a brief explanation of the algorithm is given in the next two sections. Additional details about the finite and infinite memory forecasts can be found in Brockwell and Davis (1991). The prediction of stationary ARMA processes is explained in Chapter 5, and the prediction of nonstationary ARMA processes is given in Chapter 9 of Brockwell and Davis (1991).

Infinite Memory Forecasts

If METHOD=CLS is used, the forecasts are *infinite memory forecasts*, also called *conditional forecasts*. The term *conditional* is used because the forecasts are computed by assuming that the unknown values of the response series before the start of the data are equal to the mean of the series. Thus, the forecasts are conditional on this assumption.

The series x_t can be represented as

$$x_t = a_t + \sum_{i=1}^{\infty} \pi_i x_{t-i}$$

where $\phi(B)/\theta(B) = 1 - \sum_{i=1}^{\infty} \pi_i B^i$.

The k -step forecast of x_{t+k} is computed as

$$\hat{x}_{t+k} = \sum_{i=1}^{k-1} \hat{\pi}_i \hat{x}_{t+k-i} + \sum_{i=k}^{\infty} \hat{\pi}_i x_{t+k-i}$$

where unobserved past values of x_t are set to zero and $\hat{\pi}_i$ is obtained from the estimated parameters $\hat{\phi}$ and $\hat{\theta}$.

Finite Memory Forecasts

For METHOD=ULS or METHOD=ML, the forecasts are *finite memory forecasts*, also called *unconditional forecasts*. For finite memory forecasts, the covariance function of the ARMA model is used to derive the best linear prediction equation.

That is, the k -step forecast of x_{t+k} , given (x_1, \dots, x_{t-1}) , is

$$\tilde{x}_{t+k} = \mathbf{C}_{k,t} \mathbf{V}_t^{-1} (x_1, \dots, x_{t-1})'$$

where $\mathbf{C}_{k,t}$ is the covariance of x_{t+k} and (x_1, \dots, x_{t-1}) and \mathbf{V}_t is the covariance matrix of the vector (x_1, \dots, x_{t-1}) . $\mathbf{C}_{k,t}$ and \mathbf{V}_t are derived from the estimated parameters.

Finite memory forecasts minimize the mean squared error of prediction if the parameters of the ARMA model are known exactly. (In most cases, the parameters of the ARMA model are estimated, so the predictors are not true best linear forecasts.)

If the response series is differenced, the final forecast is produced by summing the forecast of the differenced series. This summation and the forecast are conditional on the initial values of the series. Thus, when the response series is differenced, the final forecasts are not true finite memory forecasts because they are derived by assuming that the differenced series begins in a steady-state condition. Thus, they fall somewhere between finite memory and infinite memory forecasts. In practice, there is seldom any practical difference between these forecasts and true finite memory forecasts.

Forecasting Log Transformed Data

The log transformation is often used to convert time series that are nonstationary with respect to the innovation variance into stationary time series. The usual approach is to take the log of the series in a DATA step and then apply PROC ARIMA to the transformed data. A DATA step is then used to transform the forecasts of the logs back to the original units of measurement. The confidence limits are also transformed by using the exponential function.

As one alternative, you can simply exponentiate the forecast series. This procedure gives a forecast for the median of the series, but the antilog of the forecast log series underpredicts the mean of the original series. If you want to predict the expected value of the series, you need to take into account the standard error of the forecast, as shown in the following example, which uses an AR(2) model to forecast the log of a series Y :

```

data in;
    set in;
    ylog = log( y );
run;

proc arima data=in;
    identify var=ylog;
    estimate p=2;
    forecast lead=10 out=out;
run;

data out;
    set out;
    y = exp( ylog );
    l95 = exp( l95 );
    u95 = exp( u95 );
    forecast = exp( forecast + std*std/2 );
run;

```

Specifying Series Periodicity

The `INTERVAL=` option is used together with the `ID=` variable to describe the observations that make up the time series. For example, `INTERVAL=MONTH` specifies a monthly time series in which each observation represents one month. See Chapter 4, “Date Intervals, Formats, and Functions,” for details about the interval values supported.

The variable specified by the `ID=` option in the `PROC ARIMA` statement identifies the time periods associated with the observations. Usually, SAS date, time, or datetime values are used for this variable. `PROC ARIMA` uses the `ID=` variable in the following ways:

- to validate the data periodicity. When the `INTERVAL=` option is specified, `PROC ARIMA` uses the `ID` variable to check the data and verify that successive observations have valid `ID` values that correspond to successive time intervals. When the `INTERVAL=` option is not used, `PROC ARIMA` verifies that the `ID` values are nonmissing and in ascending order.
- to check for gaps in the input observations. For example, if `INTERVAL=MONTH` and an input observation for April 1970 follows an observation for January 1970, there is a gap in the input data with two omitted observations (namely February and March 1970). A warning message is printed when a gap in the input data is found.
- to label the forecast observations in the output data set. `PROC ARIMA` extrapolates the values of the `ID` variable for the forecast observations from the `ID` value at the end of the input data according to the frequency specifications of the `INTERVAL=` option. If the `INTERVAL=` option is not specified, `PROC ARIMA` extrapolates the `ID` variable by incrementing the `ID` variable value for the last observation in the input data by 1 for each forecast period. Values of the `ID` variable over the range of the input data are copied to the output data set.

The ALIGN= option is used to align the ID variable to the beginning, middle, or end of the time ID interval specified by the INTERVAL= option.

Detecting Outliers

You can use the OUTLIER statement to detect changes in the level of the response series that are not accounted for by the estimated model. The types of changes considered are additive outliers (AO), level shifts (LS), and temporary changes (TC).

Let η_t be a regression variable that describes some type of change in the mean response. In time series literature η_t is called a shock signature. An additive outlier at some time point s corresponds to a shock signature η_t such that $\eta_s = 1.0$ and η_t is 0.0 at all other points. Similarly a permanent level shift that originates at time s has a shock signature such that η_t is 0.0 for $t < s$ and 1.0 for $t \geq s$. A temporary level shift of duration d that originates at time s has η_t equal to 1.0 between s and $s + d$ and 0.0 otherwise.

Suppose that you are estimating the ARIMA model

$$D(B)Y_t = \mu_t + \frac{\theta(B)}{\phi(B)}a_t$$

where Y_t is the response series, $D(B)$ is the differencing polynomial in the backward shift operator B (possibly identity), μ_t is the transfer function input, $\phi(B)$ and $\theta(B)$ are the AR and MA polynomials, respectively, and a_t is the Gaussian white noise series.

The problem of detection of level shifts in the OUTLIER statement is formulated as a problem of sequential selection of shock signatures that improve the model in the ESTIMATE statement. This is similar to the forward selection process in the stepwise regression procedure. The selection process starts with considering shock signatures of the type specified in the TYPE= option, originating at each nonmissing measurement. This involves testing $H_0: \beta = 0$ versus $H_a: \beta \neq 0$ in the model

$$D(B)(Y_t - \beta\eta_t) = \mu_t + \frac{\theta(B)}{\phi(B)}a_t$$

for each of these shock signatures. The most significant shock signature, if it also satisfies the significance criterion in ALPHA= option, is included in the model. If no significant shock signature is found, then the outlier detection process stops; otherwise this augmented model, which incorporates the selected shock signature in its transfer function input, becomes the null model for the subsequent selection process. This iterative process stops if at any stage no more significant shock signatures are found or if the number of iterations exceeds the maximum search number that results due to the MAXNUM= and MAXPCT= settings. In all these iterations, the parameters of the ARIMA model in the ESTIMATE statement are held fixed.

The precise details of the testing procedure for a given shock signature η_t are as follows:

The preceding testing problem is equivalent to testing $H_0: \beta = 0$ versus $H_a: \beta \neq 0$ in the following “regression with ARMA errors” model

$$N_t = \beta\zeta_t + \frac{\theta(B)}{\phi(B)}a_t$$

where $N_t = (D(B)Y_t - \mu_t)$ is the “noise” process and $\zeta_t = D(B)\eta_t$ is the “effective” shock signature.

In this setting, under H_0 , $N = (N_1, N_2, \dots, N_n)^T$ is a mean zero Gaussian vector with variance covariance matrix $\sigma^2 \mathbf{\Omega}$. Here σ^2 is the variance of the white noise process a_t and $\mathbf{\Omega}$ is the variance-covariance matrix associated with the ARMA model. Moreover, under H_a , N has $\beta\zeta$ as the mean vector where $\zeta = (\zeta_1, \zeta_2, \dots, \zeta_n)^T$. Additionally, the generalized least squares estimate of β and its variance is given by

$$\begin{aligned}\hat{\beta} &= \delta/\kappa \\ \text{Var}(\hat{\beta}) &= \sigma^2/\kappa\end{aligned}$$

where $\delta = \zeta^T \mathbf{\Omega}^{-1} N$ and $\kappa = \zeta^T \mathbf{\Omega}^{-1} \zeta$. The test statistic $\tau^2 = \delta^2/(\sigma^2 \kappa)$ is used to test the significance of β , which has an approximate chi-squared distribution with 1 degree of freedom under H_0 . The type of estimate of σ^2 used in the calculation of τ^2 can be specified by the SIGMA= option. The default setting is SIGMA=ROBUST, which corresponds to a robust estimate suggested in an outlier detection procedure in X-12-ARIMA, the Census Bureau's time series analysis program; see Findley et al. (1998) for additional information. The robust estimate of σ^2 is computed by the formula

$$\hat{\sigma}^2 = (1.49 \times \text{Median}(|\hat{a}_t|))^2$$

where \hat{a}_t are the standardized residuals of the null ARIMA model. The setting SIGMA=MSE corresponds to the usual mean squared error estimate (MSE) computed the same way as in the ESTIMATE statement with the NODF option.

The quantities δ and κ are efficiently computed by a method described in de Jong and Penzer (1998); see also Kohn and Ansley (1985).

Modeling in the Presence of Outliers

In practice, modeling and forecasting time series data in the presence of outliers is a difficult problem for several reasons. The presence of outliers can adversely affect the model identification and estimation steps. Their presence close to the end of the observation period can have a serious impact on the forecasting performance of the model. In some cases, level shifts are associated with changes in the mechanism that drives the observation process, and separate models might be appropriate to different sections of the data. In view of all these difficulties, diagnostic tools such as outlier detection and residual analysis are essential in any modeling process.

The following modeling strategy, which incorporates level shift detection in the familiar Box-Jenkins modeling methodology, seems to work in many cases:

1. Proceed with model identification and estimation as usual. Suppose this results in a tentative ARIMA model, say M.
2. Check for additive and permanent level shifts unaccounted for by the model M by using the OUTLIER statement. In this step, unless there is evidence to justify it, the number of level shifts searched should be kept small.
3. Augment the original dataset with the regression variables that correspond to the detected outliers.
4. Include the first few of these regression variables in M, and call this model M1. Reestimate all the parameters of M1. It is important not to include too many of these outlier variables in the model in order to avoid the danger of over-fitting.

5. Check the adequacy of M1 by examining the parameter estimates, residual analysis, and outlier detection. Refine it more if necessary.

OUT= Data Set

The output data set produced by the OUT= option of the PROC ARIMA or FORECAST statements contains the following:

- the BY variables
- the ID variable
- the variable specified by the VAR= option in the IDENTIFY statement, which contains the actual values of the response series
- FORECAST, a numeric variable that contains the one-step-ahead predicted values and the multistep forecasts
- STD, a numeric variable that contains the standard errors of the forecasts
- a numeric variable that contains the lower confidence limits of the forecast. This variable is named L95 by default but has a different name if the ALPHA= option specifies a different size for the confidence limits.
- RESIDUAL, a numeric variable that contains the differences between actual and forecast values
- a numeric variable that contains the upper confidence limits of the forecast. This variable is named U95 by default but has a different name if the ALPHA= option specifies a different size for the confidence limits.

The ID variable, the BY variables, and the response variable are the only ones copied from the input to the output data set. In particular, the input variables are not copied to the OUT= data set.

Unless the NOOUTALL option is specified, the data set contains the whole time series. The FORECAST variable has the one-step forecasts (predicted values) for the input periods, followed by n forecast values, where n is the LEAD= value. The actual and RESIDUAL values are missing beyond the end of the series.

If you specify the same OUT= data set in different FORECAST statements, the latter FORECAST statements overwrite the output from the previous FORECAST statements. If you want to combine the forecasts from different FORECAST statements in the same output data set, specify the OUT= option once in the PROC ARIMA statement and omit the OUT= option in the FORECAST statements.

When a global output data set is created by the OUT= option in the PROC ARIMA statement, the variables in the OUT= data set are defined by the first FORECAST statement that is executed. The results of subsequent FORECAST statements are vertically concatenated onto the OUT= data set. Thus, if no ID variable is specified in the first FORECAST statement that is executed, no ID variable appears in the output data set, even if one is specified in a later FORECAST statement. If an ID variable is specified in the first FORECAST statement that is executed but not in a later FORECAST statement, the value of the ID variable is the same as

the last value processed for the ID variable for all observations created by the later FORECAST statement. Furthermore, even if the response variable changes in subsequent FORECAST statements, the response variable name in the output data set is that of the first response variable analyzed.

OUTCOV= Data Set

The output data set produced by the OUTCOV= option of the IDENTIFY statement contains the following variables:

- LAG, a numeric variable that contains the lags that correspond to the values of the covariance variables. The values of LAG range from 0 to N for covariance functions and from -N to N for cross-covariance functions, where N is the value of the NLAG= option.
- VAR, a character variable that contains the name of the variable specified by the VAR= option.
- CROSSVAR, a character variable that contains the name of the variable specified in the CROSSCORR= option, which labels the different cross-covariance functions. The CROSSVAR variable is blank for the autocovariance observations. When there is no CROSSCORR= option, this variable is not created.
- N, a numeric variable that contains the number of observations used to calculate the current value of the covariance or cross-covariance function.
- COV, a numeric variable that contains the autocovariance or cross-covariance function values. COV contains the autocovariances of the VAR= variable when the value of the CROSSVAR variable is blank. Otherwise COV contains the cross covariances between the VAR= variable and the variable named by the CROSSVAR variable.
- CORR, a numeric variable that contains the autocorrelation or cross-correlation function values. CORR contains the autocorrelations of the VAR= variable when the value of the CROSSVAR variable is blank. Otherwise CORR contains the cross-correlations between the VAR= variable and the variable named by the CROSSVAR variable.
- STDERR, a numeric variable that contains the standard errors of the autocorrelations. The standard error estimate is based on the hypothesis that the process that generates the time series is a pure moving-average process of order LAG-1. For the cross-correlations, STDERR contains the value $1/\sqrt{n}$, which approximates the standard error under the hypothesis that the two series are uncorrelated.
- INVCORR, a numeric variable that contains the inverse autocorrelation function values of the VAR= variable. For cross-correlation observations (that is, when the value of the CROSSVAR variable is not blank), INVCORR contains missing values.
- PARTCORR, a numeric variable that contains the partial autocorrelation function values of the VAR= variable. For cross-correlation observations (that is, when the value of the CROSSVAR variable is not blank), PARTCORR contains missing values.

OUTEST= Data Set

PROC ARIMA writes the parameter estimates for a model to an output data set when the OUTEST= option is specified in the ESTIMATE statement. The OUTEST= data set contains the following:

- the BY variables
- `_MODLABEL_`, a character variable that contains the model label, if it is provided by using the label option in the ESTIMATE statement (otherwise this variable is not created).
- `_NAME_`, a character variable that contains the name of the parameter for the covariance or correlation observations or is blank for the observations that contain the parameter estimates. (This variable is not created if neither OUTCOV nor OUTCORR is specified.)
- `_TYPE_`, a character variable that identifies the type of observation. A description of the `_TYPE_` variable values is given below.
- variables for model parameters

The variables for the model parameters are named as follows:

ERRORVAR	This numeric variable contains the variance estimate. The <code>_TYPE_=EST</code> observation for this variable contains the estimated error variance, and the remaining observations are missing.
MU	This numeric variable contains values for the mean parameter for the model. (This variable is not created if NOCONSTANT is specified.)
MAj _k	These numeric variables contain values for the moving-average parameters. The variables for moving-average parameters are named MAj _k, where <i>j</i> is the factor-number and <i>k</i> is the index of the parameter within a factor.
ARj _k	These numeric variables contain values for the autoregressive parameters. The variables for autoregressive parameters are named ARj _k, where <i>j</i> is the factor number and <i>k</i> is the index of the parameter within a factor.
Ij _k	These variables contain values for the transfer function parameters. Variables for transfer function parameters are named Ij _k, where <i>j</i> is the number of the INPUT variable associated with the transfer function component and <i>k</i> is the number of the parameter for the particular INPUT variable. INPUT variables are numbered according to the order in which they appear in the INPUT= list.
STATUS	This variable describes the convergence status of the model. A value of 0_CONVERGED indicates that the model converged.

The value of the `_TYPE_` variable for each observation indicates the kind of value contained in the variables for model parameters for the observation. The OUTEST= data set contains observations with the following `_TYPE_` values:

EST	The observation contains parameter estimates.
-----	---

STD	The observation contains approximate standard errors of the estimates.
CORR	The observation contains correlations of the estimates. OUTCORR must be specified to get these observations.
COV	The observation contains covariances of the estimates. OUTCOV must be specified to get these observations.
FACTOR	The observation contains values that identify for each parameter the factor that contains it. Negative values indicate denominator factors in transfer function models.
LAG	The observation contains values that identify the lag associated with each parameter.
SHIFT	The observation contains values that identify the shift associated with the input series for the parameter.

The values given for _TYPE_=FACTOR, _TYPE_=LAG, or _TYPE_=SHIFT observations enable you to reconstruct the model employed when provided with only the OUTEST= data set.

OUTEST= Examples

This section clarifies how model parameters are stored in the OUTEST= data set with two examples.

Consider the following example:

```
proc arima data=input;
  identify var=y cross=(x1 x2);
  estimate p=(1) (6) q=(1,3) (12) input=(x1 x2) outest=est;
run;

proc print data=est;
run;
```

The model specified by these statements is

$$Y_t = \mu + \omega_{1,0}X_{1,t} + \omega_{2,0}X_{2,t} + \frac{(1 - \theta_{11}B - \theta_{12}B^3)(1 - \theta_{21}B^{12})}{(1 - \phi_{11}B)(1 - \phi_{21}B^6)}a_t$$

The OUTEST= data set contains the values shown in [Table 7.10](#).

Table 7.10 OUTEST= Data Set for First Example

Obs	_TYPE_	Y	MU	MA1_1	MA1_2	MA2_1	AR1_1	AR2_1	I1_1	I2_1
1	EST	σ^2	μ	θ_{11}	θ_{12}	θ_{21}	ϕ_{11}	ϕ_{21}	$\omega_{1,0}$	$\omega_{2,0}$
2	STD	.	se μ	se θ_{11}	se θ_{12}	se θ_{21}	se ϕ_{11}	se ϕ_{21}	se $\omega_{1,0}$	se $\omega_{2,0}$
3	FACTOR	.	0	1	1	2	1	2	1	1
4	LAG	.	0	1	3	12	1	6	0	0
5	SHIFT	.	0	0	0	0	0	0	0	0

Note that the symbols in the rows for _TYPE_=EST and _TYPE_=STD in [Table 7.10](#) would be numeric values in a real data set.

Next, consider the following example:

```

proc arima data=input;
  identify var=y cross=(x1 x2);
  estimate p=1 q=1 input=(2 $ (1)/(1,2)x1 1 $ /(1)x2) outest=est;
run;

proc print data=est;
run;

```

The model specified by these statements is

$$Y_t = \mu + \frac{\omega_{10} - \omega_{11}B}{1 - \delta_{11}B - \delta_{12}B^2}X_{1,t-2} + \frac{\omega_{20}}{1 - \delta_{21}B}X_{2,t-1} + \frac{(1 - \theta_1 B)}{(1 - \phi_1 B)}a_t$$

The OUTEST= data set contains the values shown in Table 7.11.

Table 7.11 OUTEST= Data Set for Second Example

Obs	_TYPE_	Y	MU	MA1_1	AR1_1	I1_1	I1_2	I1_3	I1_4	I2_1	I2_2
1	EST	σ^2	μ	θ_1	ϕ_1	ω_{10}	ω_{11}	δ_{11}	δ_{12}	ω_{20}	δ_{21}
2	STD	.	se μ	se θ_1	se ϕ_1	se ω_{10}	se ω_{11}	se δ_{11}	se δ_{12}	se ω_{20}	se δ_{21}
3	FACTOR	.	0	1	1	1	1	-1	-1	1	-1
4	LAG	.	0	1	1	0	1	1	2	0	1
5	SHIFT	.	0	0	0	2	2	2	2	1	1

OUTMODEL= SAS Data Set

The OUTMODEL= option in the ESTIMATE statement writes an output data set that enables you to reconstruct the model. The OUTMODEL= data set contains much the same information as the OUTEST= data set but in a transposed form that might be more useful for some purposes. In addition, the OUTMODEL= data set includes the differencing operators.

The OUTMODEL data set contains the following:

- the BY variables
- _MODLABEL_, a character variable that contains the model label, if it is provided by using the label option in the ESTIMATE statement (otherwise this variable is not created).
- _NAME_, a character variable that contains the name of the response or input variable for the observation.
- _TYPE_, a character variable that contains the estimation method that was employed. The value of _TYPE_ can be CLS, ULS, or ML.
- _STATUS_, a character variable that describes the convergence status of the model. A value of 0_CONVERGED indicates that the model converged.
- _PARAM_, a character variable that contains the name of the parameter given by the observation. _PARAM_ takes on the values ERRORVAR, MU, AR, MA, NUM, DEN, and DIF.

- `_VALUE_`, a numeric variable that contains the value of the estimate defined by the `_PARM_` variable.
- `_STD_`, a numeric variable that contains the standard error of the estimate.
- `_FACTOR_`, a numeric variable that indicates the number of the factor to which the parameter belongs.
- `_LAG_`, a numeric variable that contains the number of the term within the factor that contains the parameter.
- `_SHIFT_`, a numeric variable that contains the shift value for the input variable associated with the current parameter.

The values of `_FACTOR_` and `_LAG_` identify which particular MA, AR, NUM, or DEN parameter estimate is given by the `_VALUE_` variable. The `_NAME_` variable contains the response variable name for the MU, AR, or MA parameters. Otherwise, `_NAME_` contains the input variable name associated with NUM or DEN parameter estimates. The `_NAME_` variable contains the appropriate variable name associated with the current DIF observation as well. The `_VALUE_` variable is 1 for all DIF observations, and the `_LAG_` variable indicates the degree of differencing employed.

The observations contained in the OUTMODEL= data set are identified by the `_PARM_` variable. A description of the values of the `_PARM_` variable follows:

NUMRESID	<code>_VALUE_</code> contains the number of residuals.
NPARMS	<code>_VALUE_</code> contains the number of parameters in the model.
NDIFS	<code>_VALUE_</code> contains the sum of the differencing lags employed for the response variable.
ERRORVAR	<code>_VALUE_</code> contains the estimate of the innovation variance.
MU	<code>_VALUE_</code> contains the estimate of the mean term.
AR	<code>_VALUE_</code> contains the estimate of the autoregressive parameter indexed by the <code>_FACTOR_</code> and <code>_LAG_</code> variable values.
MA	<code>_VALUE_</code> contains the estimate of a moving-average parameter indexed by the <code>_FACTOR_</code> and <code>_LAG_</code> variable values.
NUM	<code>_VALUE_</code> contains the estimate of the parameter in the numerator factor of the transfer function of the input variable indexed by the <code>_FACTOR_</code> , <code>_LAG_</code> , and <code>_SHIFT_</code> variable values.
DEN	<code>_VALUE_</code> contains the estimate of the parameter in the denominator factor of the transfer function of the input variable indexed by the <code>_FACTOR_</code> , <code>_LAG_</code> , and <code>_SHIFT_</code> variable values.
DIF	<code>_VALUE_</code> contains the difference operator defined by the difference lag given by the value in the <code>_LAG_</code> variable.

OUTSTAT= Data Set

PROC ARIMA writes the diagnostic statistics for a model to an output data set when the OUTSTAT= option is specified in the ESTIMATE statement. The OUTSTAT data set contains the following:

- the BY variables.
- `_MODLABEL_`, a character variable that contains the model label, if it is provided by using the label option in the ESTIMATE statement (otherwise this variable is not created).
- `_TYPE_`, a character variable that contains the estimation method used. `_TYPE_` can have the value CLS, ULS, or ML.
- `_STAT_`, a character variable that contains the name of the statistic given by the `_VALUE_` variable in this observation. `_STAT_` takes on the values AIC, SBC, LOGLIK, SSE, NUMRESID, NPARMS, NDIFS, ERRORVAR, MU, CONV, and NITER.
- `_VALUE_`, a numeric variable that contains the value of the statistic named by the `_STAT_` variable.

The observations contained in the OUTSTAT= data set are identified by the `_STAT_` variable. A description of the values of the `_STAT_` variable follows:

AIC	Akaike's information criterion
SBC	Schwarz's Bayesian criterion
LOGLIK	the log-likelihood, if METHOD=ML or METHOD=ULS is specified
SSE	the sum of the squared residuals
NUMRESID	the number of residuals
NPARMS	the number of parameters in the model
NDIFS	the sum of the differencing lags employed for the response variable
ERRORVAR	the estimate of the innovation variance
MU	the estimate of the mean term
CONV	tells if the estimation converged. The value of 0 signifies that estimation converged. Nonzero values reflect convergence problems.
NITER	the number of iterations

Remark. CONV takes an integer value that corresponds to the error condition of the parameter estimation process. The value of 0 signifies that estimation process has converged. The higher values signify convergence problems of increasing severity. Specifically:

- `CONV = 0` indicates that the estimation process has converged.
- `CONV = 1` or `2` indicates that the estimation process has run into numerical problems (such as encountering an unstable model or a ridge) during the iterations.
- `CONV >= 3` indicates that the estimation process has failed to converge.

Printed Output

The ARIMA procedure produces printed output for each of the IDENTIFY, ESTIMATE, and FORECAST statements. The output produced by each ARIMA statement is described in the following sections.

IDENTIFY Statement Printed Output

The printed output of the IDENTIFY statement consists of the following:

- a table of summary statistics, including the name of the response variable, any specified periods of differencing, the mean and standard deviation of the response series after differencing, and the number of observations after differencing
- a plot of the sample autocorrelation function for lags up to and including the NLAG= option value. Standard errors of the autocorrelations also appear to the right of the autocorrelation plot if the value of LINESIZE= option is sufficiently large. The standard errors are derived using Bartlett's approximation (Box and Jenkins 1976, p. 177). The approximation for a standard error for the estimated autocorrelation function at lag k is based on a null hypothesis that a pure moving-average Gaussian process of order $k-1$ generated the time series. The relative position of an approximate 95% confidence interval under this null hypothesis is indicated by the dots in the plot, while the asterisks represent the relative magnitude of the autocorrelation value.
- a plot of the sample inverse autocorrelation function. See the section “[The Inverse Autocorrelation Function](#)” on page 241 for more information about the inverse autocorrelation function.
- a plot of the sample partial autocorrelation function
- a table of test statistics for the hypothesis that the series is white noise. These test statistics are the same as the tests for white noise residuals produced by the ESTIMATE statement and are described in the section “[Estimation Details](#)” on page 250.
- a plot of the sample cross-correlation function for each series specified in the CROSSCORR= option. If a model was previously estimated for a variable in the CROSSCORR= list, the cross-correlations for that series are computed for the prewhitened input and response series. For each input variable with a prewhitening filter, the cross-correlation report for the input series includes the following:
 - a table of test statistics for the hypothesis of no cross-correlation between the input and response series
 - the prewhitening filter used for the prewhitening transformation of the predictor and response variables
- ESACF tables if the ESACF option is used
- MINIC table if the MINIC option is used
- SCAN table if the SCAN option is used
- STATIONARITY test results if the STATIONARITY option is used

ESTIMATE Statement Printed Output

The printed output of the ESTIMATE statement consists of the following:

- if the PRINTALL option is specified, the preliminary parameter estimates and an iteration history that shows the sequence of parameter estimates tried during the fitting process

- a table of parameter estimates that show the following for each parameter: the parameter name, the parameter estimate, the approximate standard error, t value, approximate probability ($Pr > |t|$), the lag for the parameter, the input variable name for the parameter, and the lag or “Shift” for the input variable
- the estimates of the constant term, the innovation variance (variance estimate), the innovation standard deviation (Std Error Estimate), Akaike’s information criterion (AIC), Schwarz’s Bayesian criterion (SBC), and the number of residuals
- the correlation matrix of the parameter estimates
- a table of test statistics for hypothesis that the residuals of the model are white noise. The table is titled “Autocorrelation Check of Residuals.”
- if the PLOT option is specified, autocorrelation, inverse autocorrelation, and partial autocorrelation function plots of the residuals
- if an INPUT variable has been modeled in such a way that prewhitening is performed in the IDENTIFY step, a table of test statistics titled “Crosscorrelation Check of Residuals.” The test statistic is based on the chi-square approximation suggested by Box and Jenkins (1976, pp. 395–396). The cross-correlation function is computed by using the residuals from the model as one series and the prewhitened input variable as the other series.
- if the GRID option is specified, the sum-of-squares or likelihood surface over a grid of parameter values near the final estimates
- a summary of the estimated model that shows the autoregressive factors, moving-average factors, and transfer function factors in backshift notation with the estimated parameter values.

OUTLIER Statement Printed Output

The printed output of the OUTLIER statement consists of the following:

- a summary that contains the information about the maximum number of outliers searched, the number of outliers actually detected, and the significance level used in the outlier detection.
- a table that contains the results of the outlier detection process. The outliers are listed in the order in which they are found. This table contains the following columns:
 - The Obs column contains the observation number of the start of the level shift.
 - If an ID= option is specified, then the Time ID column contains the time identification labels of the start of the outlier.
 - The Type column lists the type of the outlier.
 - The Estimate column contains $\hat{\beta}$, the estimate of the regression coefficient of the shock signature.
 - The Chi-Square column lists the value of the test statistic τ^2 .
 - The Approx Prob > ChiSq column lists the approximate p -value of the test statistic.

FORECAST Statement Printed Output

The printed output of the FORECAST statement consists of the following:

- a summary of the estimated model
- a table of forecasts with following columns:
 - The Obs column contains the observation number.
 - The Forecast column contains the forecast values.
 - The Std Error column contains the forecast standard errors.
 - The Lower and Uppers columns contain the approximate 95% confidence limits. The ALPHA= option can be used to change the confidence interval for forecasts.
 - If the PRINTALL option is specified, the forecast table also includes columns for the actual values of the response series (Actual) and the residual values (Residual).

ODS Table Names

PROC ARIMA assigns a name to each table it creates. You can use these names to reference the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in [Table 7.12](#).

Table 7.12 ODS Tables Produced by PROC ARIMA

ODS Table Name	Description	Statement	Option
ChiSqAuto	chi-square statistics table for autocorrelation	IDENTIFY	
ChiSqCross	chi-square statistics table for cross-correlations	IDENTIFY	CROSSCORR
CorrGraph	Correlations graph	IDENTIFY	
DescStats	Descriptive statistics	IDENTIFY	
ESACF	Extended sample autocorrelation function	IDENTIFY	ESACF
ESACFPValues	ESACF probability values	IDENTIFY	ESACF
IACFGraph	Inverse autocorrelations graph	IDENTIFY	
InputDescStats	Input descriptive statistics	IDENTIFY	
MINIC	Minimum information criterion	IDENTIFY	MINIC
PACFGraph	Partial autocorrelations graph	IDENTIFY	
SCAN	Squared canonical correlation estimates	IDENTIFY	SCAN

Table 7.12 *continued*

ODS Table Name	Description	Statement	Option
SCANPValues	SCAN chi-square probability values	IDENTIFY	SCAN
StationarityTests	Stationarity tests	IDENTIFY	STATIONARITY
TentativeOrders	Tentative order selection	IDENTIFY	MINIC, ESACF, or SCAN
ARPolynomial	Filter equations	ESTIMATE	
ChiSqAuto	chi-square statistics table for autocorrelation	ESTIMATE	
ChiSqCross	chi-square statistics table for cross-correlations	ESTIMATE	
CorrB	Correlations of the estimates	ESTIMATE	
DenPolynomial	Filter equations	ESTIMATE	
FitStatistics	Fit statistics	ESTIMATE	
IterHistory	Iteration history	ESTIMATE	PRINTALL
InitialAREstimates	Initial autoregressive parameter estimates	ESTIMATE	
InitialMAEstimates	Initial moving-average parameter estimates	ESTIMATE	
InputDescription	Input description	ESTIMATE	
MAPolynomial	Filter equations	ESTIMATE	
ModelDescription	Model description	ESTIMATE	
NumPolynomial	Filter equations	ESTIMATE	
ParameterEstimates	Parameter estimates	ESTIMATE	
PrelimEstimates	Preliminary estimates	ESTIMATE	
ObjectiveGrid	Objective function grid matrix	ESTIMATE	GRID
OptSummary	ARIMA estimation optimization	ESTIMATE	PRINTALL
OutlierDetails	Detected outliers	OUTLIER	
Forecasts	Forecast	FORECAST	

Statistical Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section provides information about the graphics produced by the ARIMA procedure. (See Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*), for more information about ODS statistical graphics.) The main types of plots available are as follows:

- plots useful in the trend and correlation analysis of the dependent and input series
- plots useful for the residual analysis of an estimated model
- forecast plots

You can obtain most plots relevant to the specified model by default. For finer control of the graphics, you can use the **PLOTS=** option in the PROC ARIMA statement. The following example is a simple illustration of how to use the **PLOTS=** option.

Airline Series: Illustration of ODS Graphics

The series in this example, the monthly airline passenger series, is also discussed later, in [Example 7.2](#).

The following statements specify an $ARIMA(0,1,1) \times (0,1,1)_{12}$ model without a mean term to the logarithms of the airline passengers series, `xlog`. Notice the use of the global plot option **ONLY** in the **PLOTS=** option of the PROC ARIMA statement. It suppresses the production of default graphics and produces only the plots specified by the subsequent **RESIDUAL** and **FORECAST** plot options. The **RESIDUAL(SMOOTH)** plot specification produces a time series plot of residuals that has an overlaid loess fit; see [Figure 7.21](#). The **FORECAST(FORECAST)** option produces a plot that shows the one-step-ahead forecasts, as well as the multistep-ahead forecasts; see [Figure 7.22](#).

```
proc arima data=seriesg
  plots(only)=(residual(smooth) forecast(forecasts));
  identify var=xlog(1,12);
  estimate q=(1)(12) noint method=ml;
  forecast id=date interval=month;
run;
```

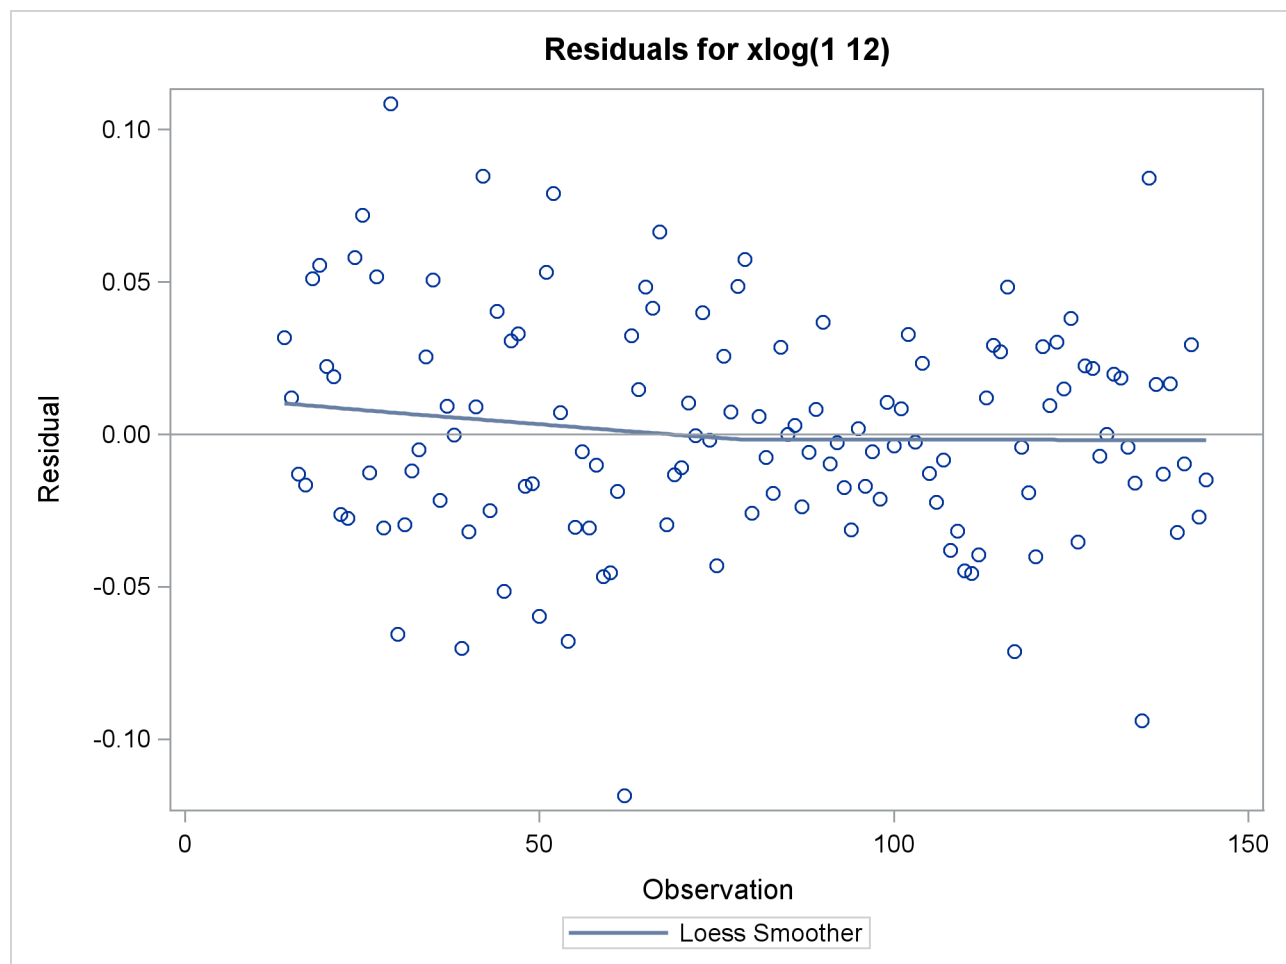
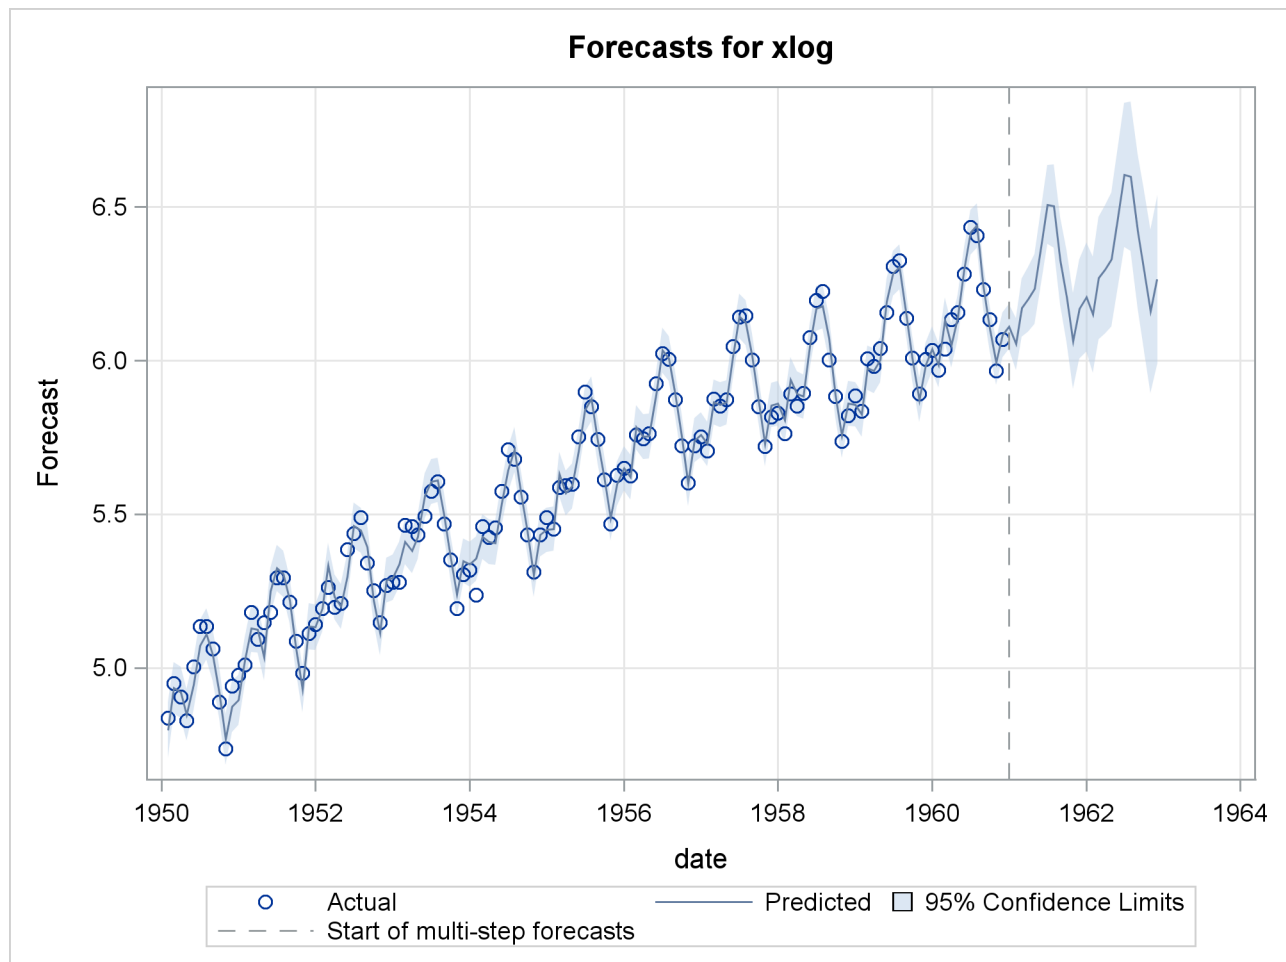
Figure 7.21 Residual Plot of the Airline Model

Figure 7.22 Forecast Plot of the Airline Model

ODS Graph Names

PROC ARIMA assigns a name to each graph it creates by using ODS. You can use these names to reference the graphs when you use ODS. The names are listed in [Table 7.13](#).

Table 7.13 ODS Graphics Produced by PROC ARIMA

ODS Graph Name	Plot Description	Option
SeriesPlot	Time series plot of the dependent series	PLOTS(UNPACK)
SeriesACFPlot	Autocorrelation plot of the dependent series	PLOTS(UNPACK)
SeriesPACFPlot	Partial-autocorrelation plot of the dependent series	PLOTS(UNPACK)
SeriesIACFPlot	Inverse-autocorrelation plot of the dependent series	PLOTS(UNPACK)
SeriesCorrPanel	Series trend and correlation analysis panel	Default

Table 7.13 *continued*

ODS Graph Name	Plot Description	Option
CrossCorrPanel	Cross-correlation plots, either individual or paneled. They are numbered 1, 2, and so on as needed.	Default
ResidualACFPlot	Residual-autocorrelation plot	PLOTS(UNPACK)
ResidualPACFPlot	Residual-partial-autocorrelation plot	PLOTS(UNPACK)
ResidualIACFPlot	Residual-inverse-autocorrelation plot	PLOTS(UNPACK)
ResidualWNPlot	Residual-white-noise-probability plot	PLOTS(UNPACK)
ResidualHistogram	Residual histogram	PLOTS(UNPACK)
ResidualQQPlot	Residual normal Q-Q Plot	PLOTS(UNPACK)
ResidualPlot	Time series plot of residuals with a superimposed smoother	PLOTS=RESIDUAL(SMOOTH)
ForecastsOnlyPlot	Time series plot of multistep forecasts	Default
ForecastsPlot	Time series plot of one-step-ahead as well as multistep forecasts	PLOTS=FORECAST(FORECAST)

Examples: ARIMA Procedure

Example 7.1: Simulated IMA Model

This example illustrates the ARIMA procedure results for a case where the true model is known. An integrated moving-average model is used for this illustration.

The following DATA step generates a pseudo-random sample of 100 periods from the ARIMA(0,1,1) process $u_t = u_{t-1} + a_t - 0.8a_{t-1}$, $a_t \text{ iid } N(0, 1)$:

```

title1 'Simulated IMA(1,1) Series';
data a;
  u1 = 0.9; a1 = 0;
  do i = -50 to 100;

```



```

      a = rannor( 32565 );
      u = u1 + a - .8 * a1;
      if i > 0 then output;
      a1 = a;
      u1 = u;
    end;
  run;

```

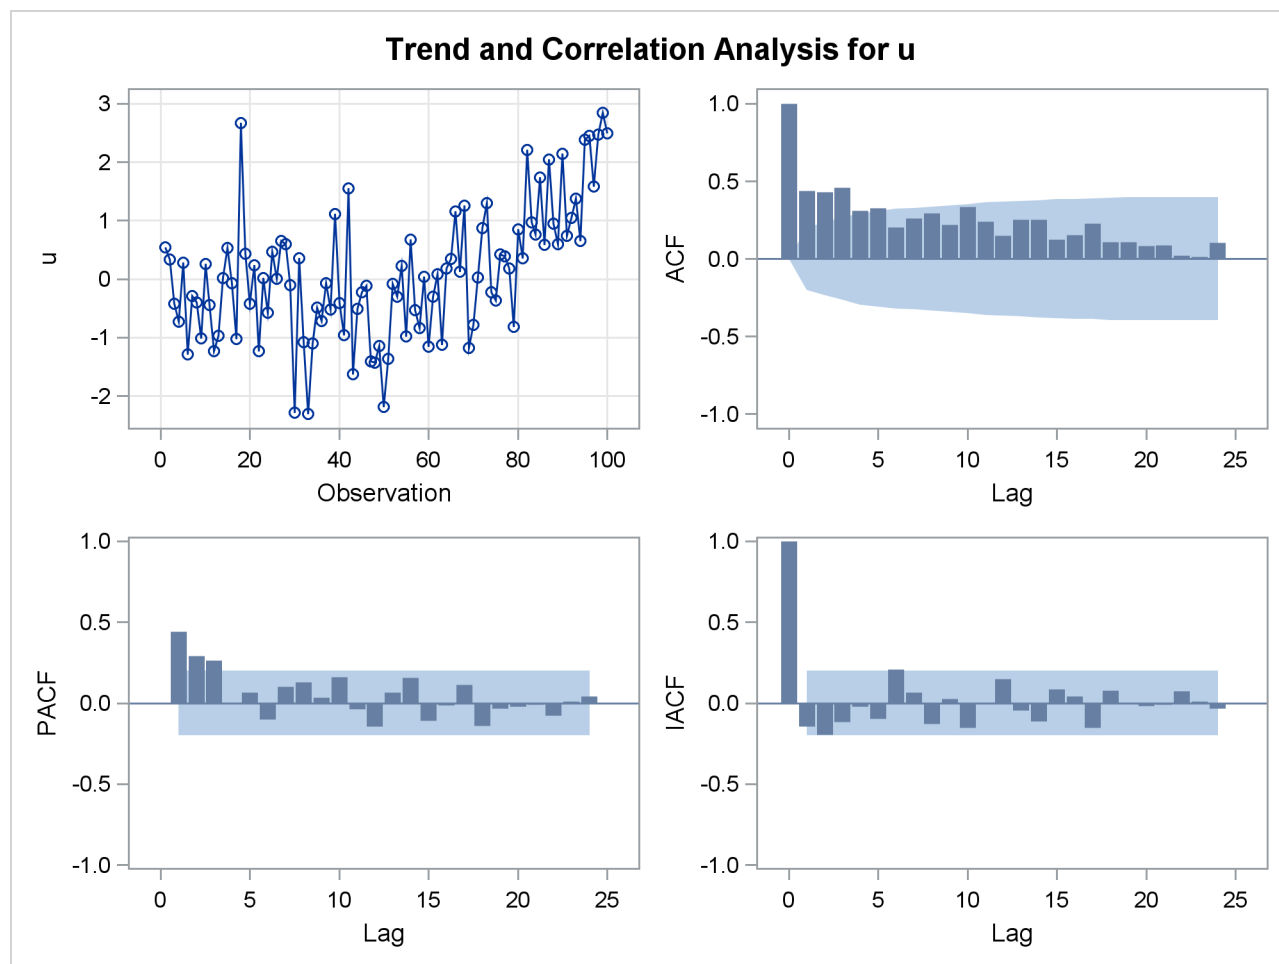
The following ARIMA procedure statements identify and estimate the model:

```

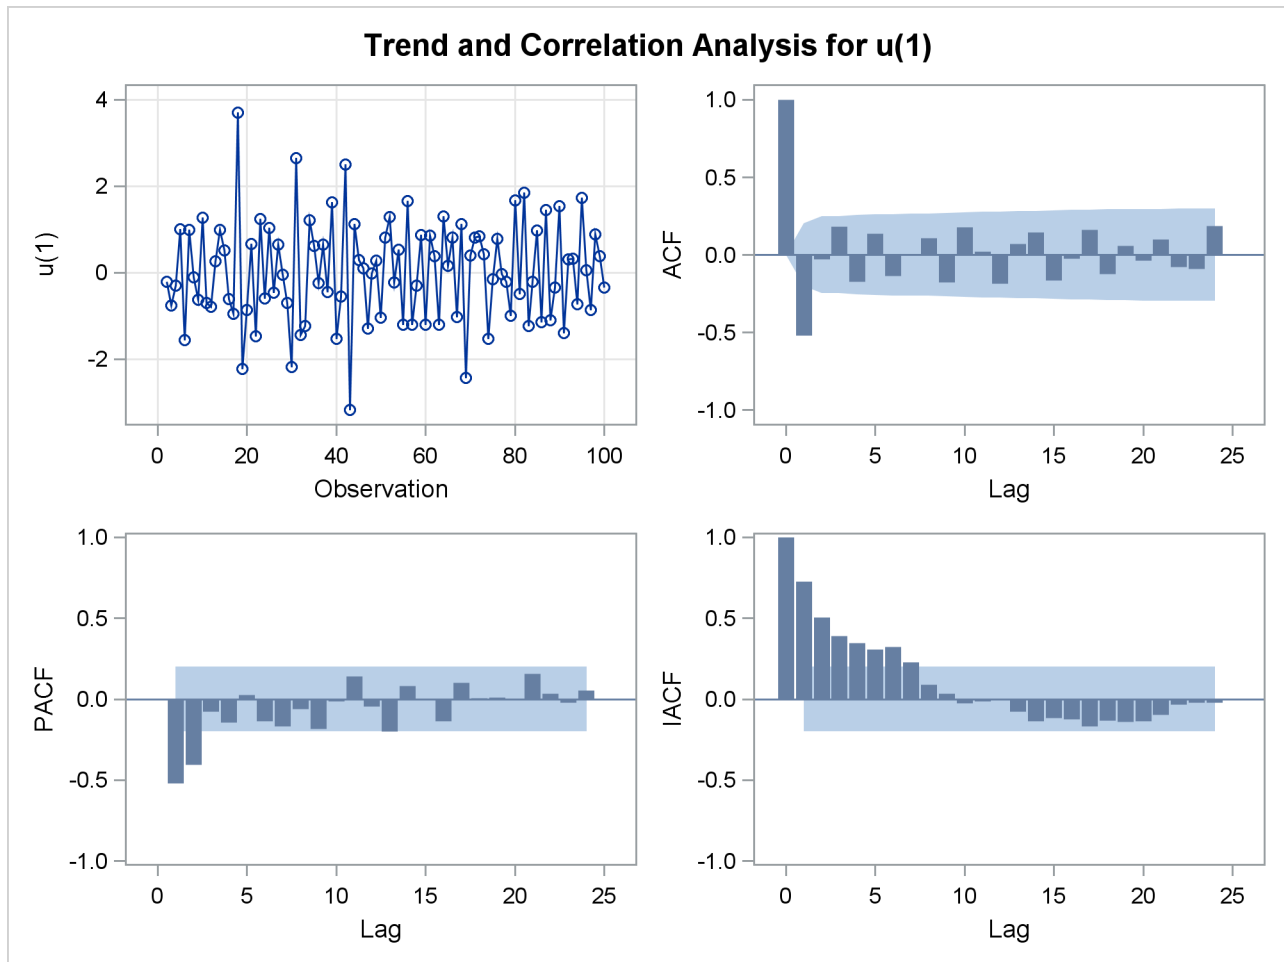
/*-- Simulated IMA Model --*/
proc arima data=a;
  identify var=u;
  run;
  identify var=u(1);
  run;
  estimate q=1 ;
  run;
quit;

```

The graphical series correlation analysis output of the first IDENTIFY statement is shown in [Output 7.1.1](#). The output shows the behavior of the sample autocorrelation function when the process is nonstationary. Note that in this case the estimated autocorrelations are not very high, even at small lags. Nonstationarity is reflected in a pattern of significant autocorrelations that do not decline quickly with increasing lag, not in the size of the autocorrelations.

Output 7.1.1 Correlation Analysis from the First IDENTIFY Statement

The second IDENTIFY statement differences the series. The results of the second IDENTIFY statement are shown in [Output 7.1.2](#). This output shows autocorrelation, inverse autocorrelation, and partial autocorrelation functions typical of MA(1) processes.

Output 7.1.2 Correlation Analysis from the Second IDENTIFY Statement

The ESTIMATE statement fits an ARIMA(0,1,1) model to the simulated data. Note that in this case the parameter estimates are reasonably close to the values used to generate the simulated data. ($\mu = 0$, $\hat{\mu} = 0.02$; $\theta_1 = 0.8$, $\hat{\theta}_1 = 0.79$; $\sigma^2 = 1$, $\hat{\sigma}^2 = 0.82$.) Moreover, the graphical analysis of the residuals shows no model inadequacies (see [Output 7.1.4](#) and [Output 7.1.5](#)).

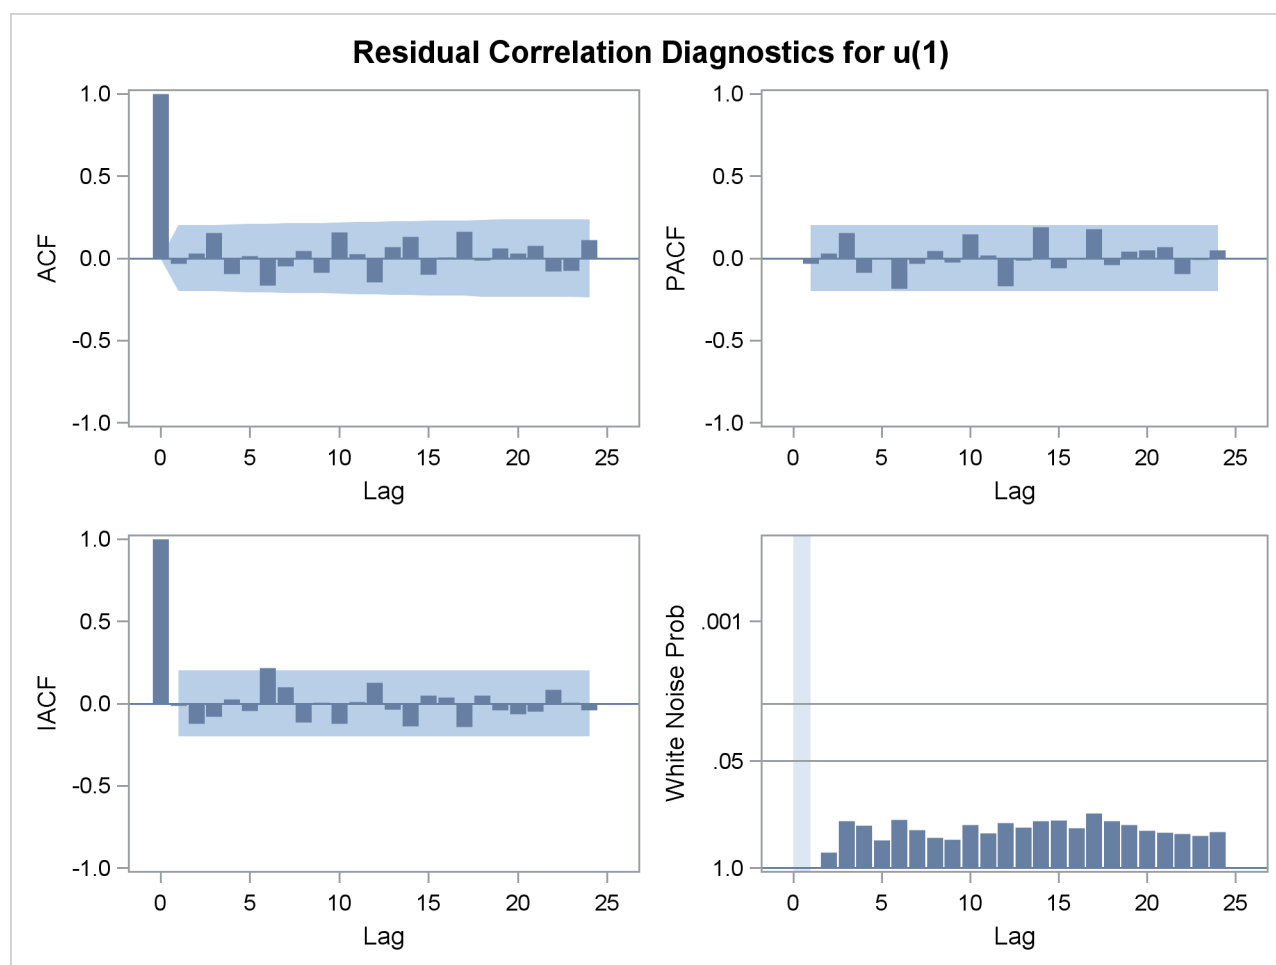
The ESTIMATE statement results are shown in [Output 7.1.3](#).

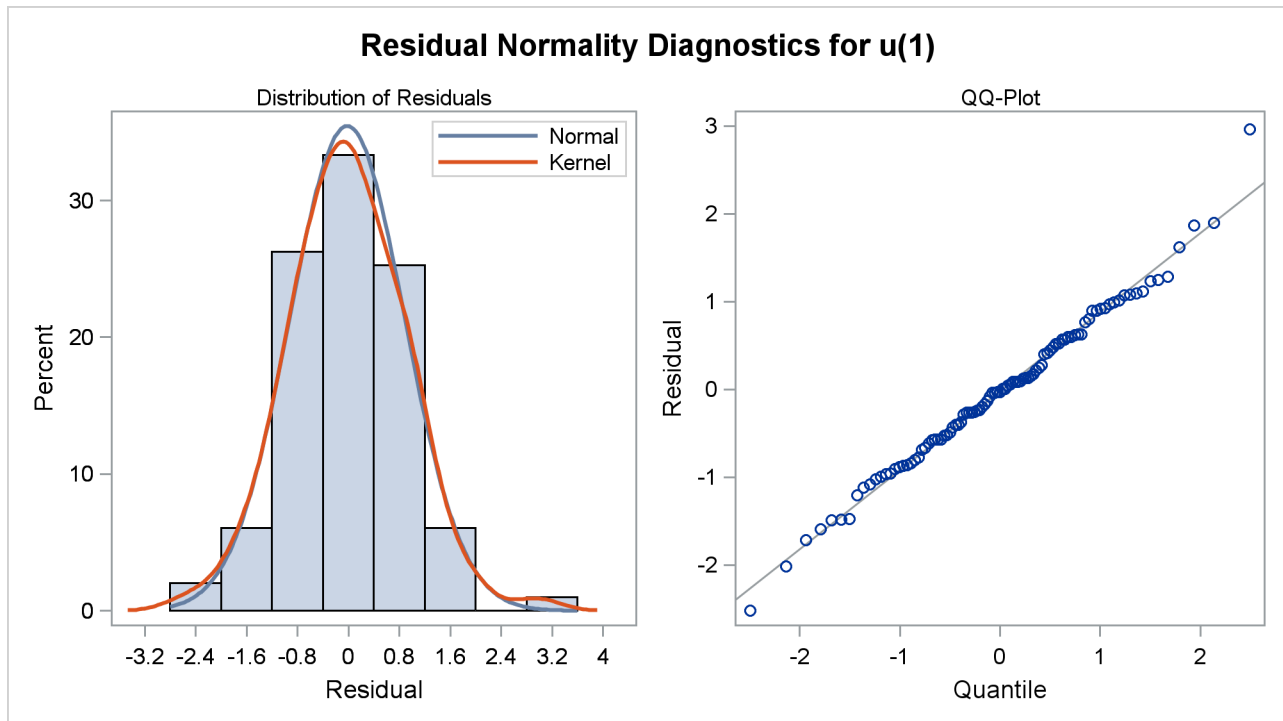
Output 7.1.3 Output from Fitting ARIMA(0,1,1) Model

Conditional Least Squares Estimation					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag
MU	0.02056	0.01972	1.04	0.2997	0
MA1,1	0.79142	0.06474	12.22	<.0001	1

Output 7.1.3 *continued*

Constant Estimate	0.020558
Variance Estimate	0.819807
Std Error Estimate	0.905432
AIC	263.2594
SBC	268.4497
Number of Residuals	99
Model for variable u	
Estimated Mean	0.020558
Period(s) of Differencing	1
Moving Average Factors	
Factor 1:	1 - 0.79142 B**(1)

Output 7.1.4 Residual Correlation Analysis of the ARIMA(0,1,1) Model

Output 7.1.5 Residual Normality Analysis of the ARIMA(0,1,1) Model**Example 7.2: Seasonal Model for the Airline Series**

The airline passenger data, given as Series G in Box and Jenkins (1976), have been used in time series analysis literature as an example of a nonstationary seasonal time series. This example uses PROC ARIMA to fit the airline model, $ARIMA(0,1,1) \times (0,1,1)_{12}$, to Box and Jenkins' Series G. The following statements read the data and log-transform the series:

```

title1 'International Airline Passengers';
title2 '(Box and Jenkins Series-G)';
data seriesg;
  input x @@;
  xlog = log( x );
  date = intnx( 'month', '31dec1948'd, _n_ );
  format date monyy.;
datalines;

... more lines ...

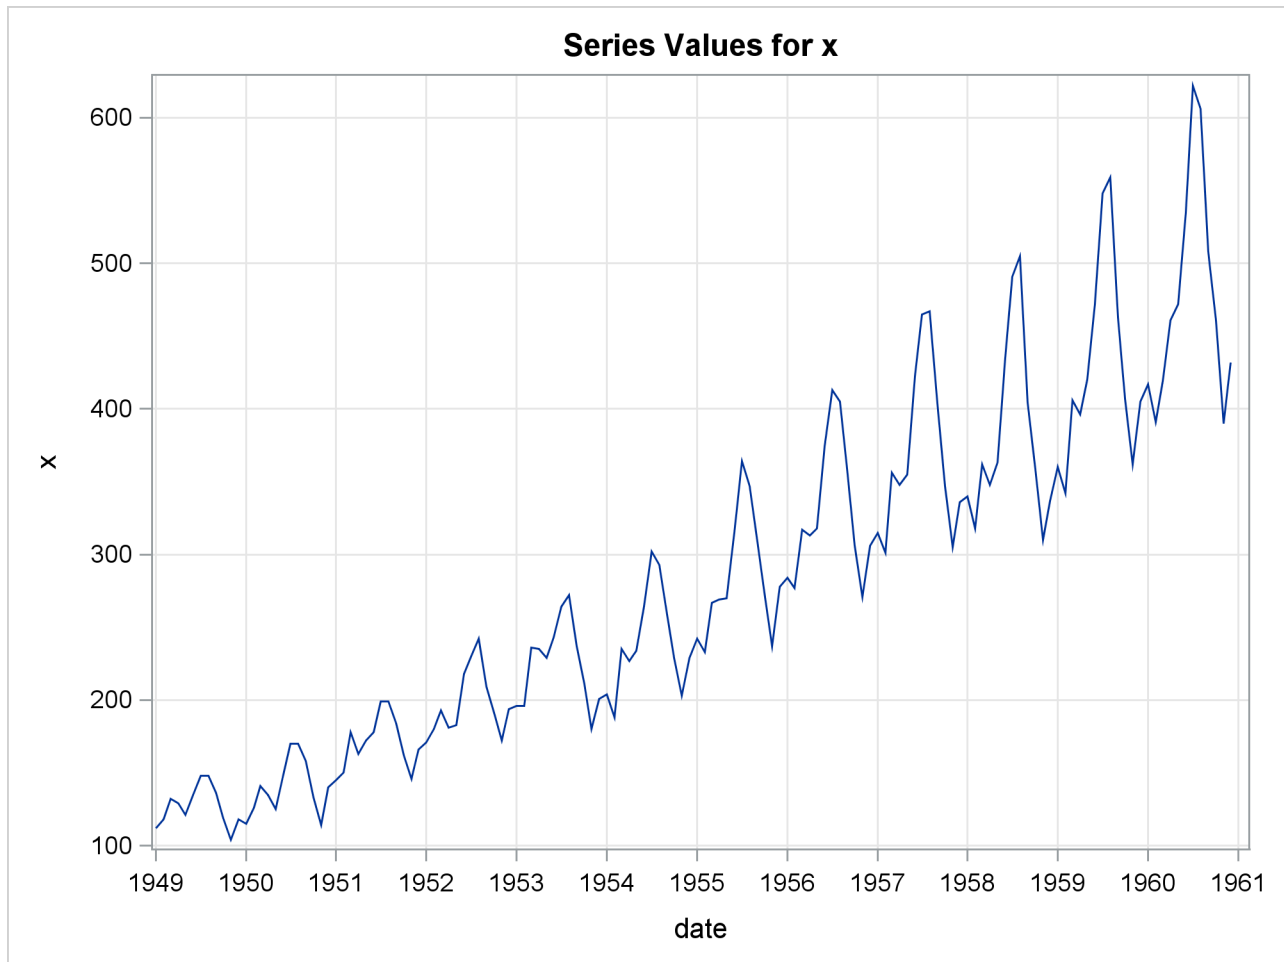
```

The following PROC TIMESERIES step plots the series, as shown in [Output 7.2.1](#):

```

proc timeseries data=seriesg plot=series;
  id date interval=month;
  var x;
run;

```

Output 7.2.1 Time Series Plot of the Airline Passenger Series

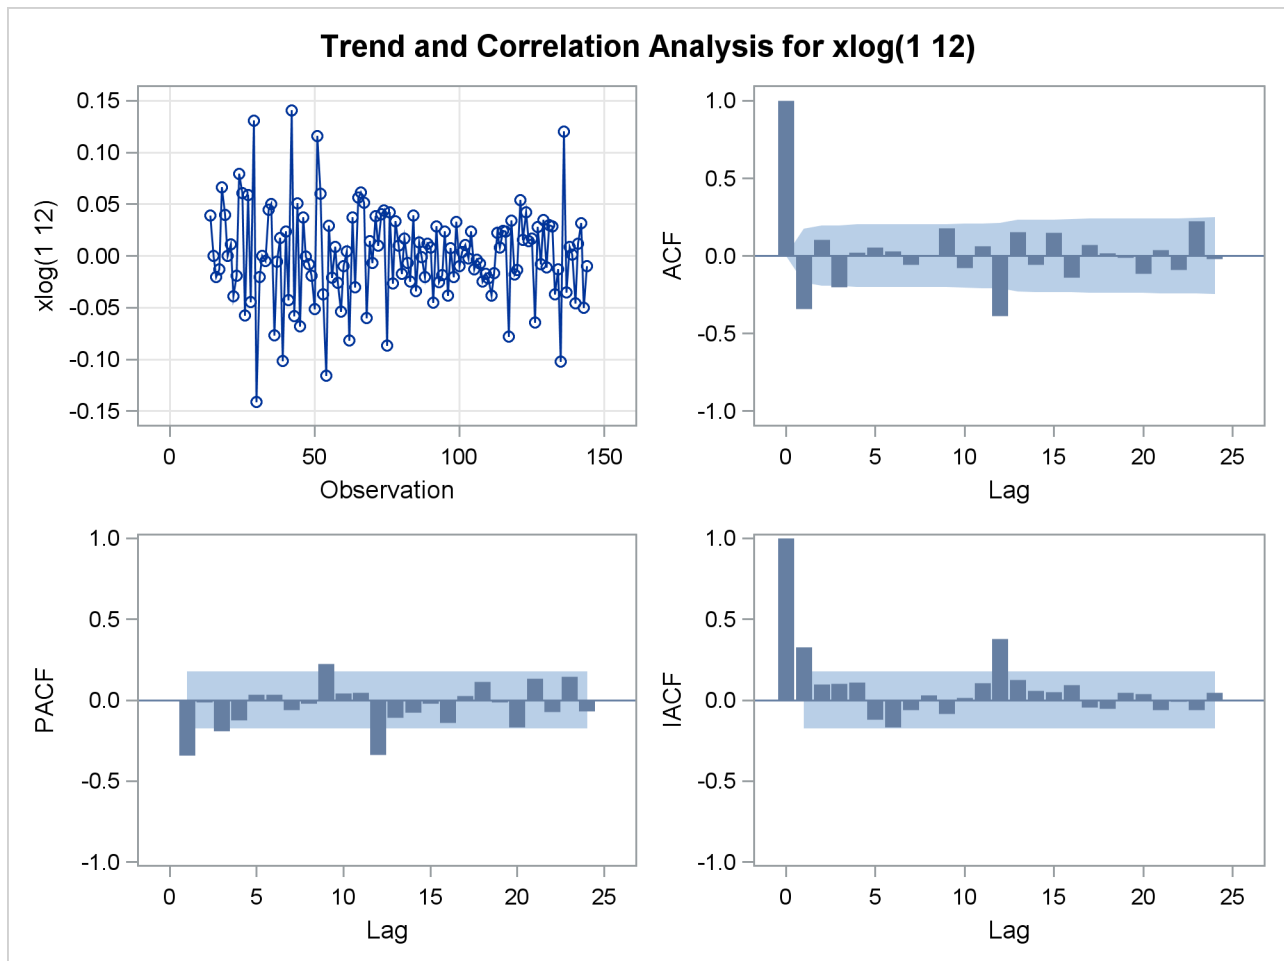
The following statements specify an $\text{ARIMA}(0,1,1) \times (0,1,1)_{12}$ model without a mean term to the logarithms of the airline passengers series, `xlog`. The model is forecast, and the results are stored in the data set `B`.

```
/*-- Seasonal Model for the Airline Series --*/
proc arima data=seriesg;
  identify var=xlog(1,12);
  estimate q=(1)(12) noint method=ml;
  forecast id=date interval=month printall out=b;
run;
```

The output from the IDENTIFY statement is shown in [Output 7.2.2](#). The autocorrelation plots shown are for the twice differenced series $(1 - B)(1 - B^{12})XLOG$. Note that the autocorrelation functions have the pattern characteristic of a first-order moving-average process combined with a seasonal moving-average process with lag 12.

Output 7.2.2 IDENTIFY Statement Output

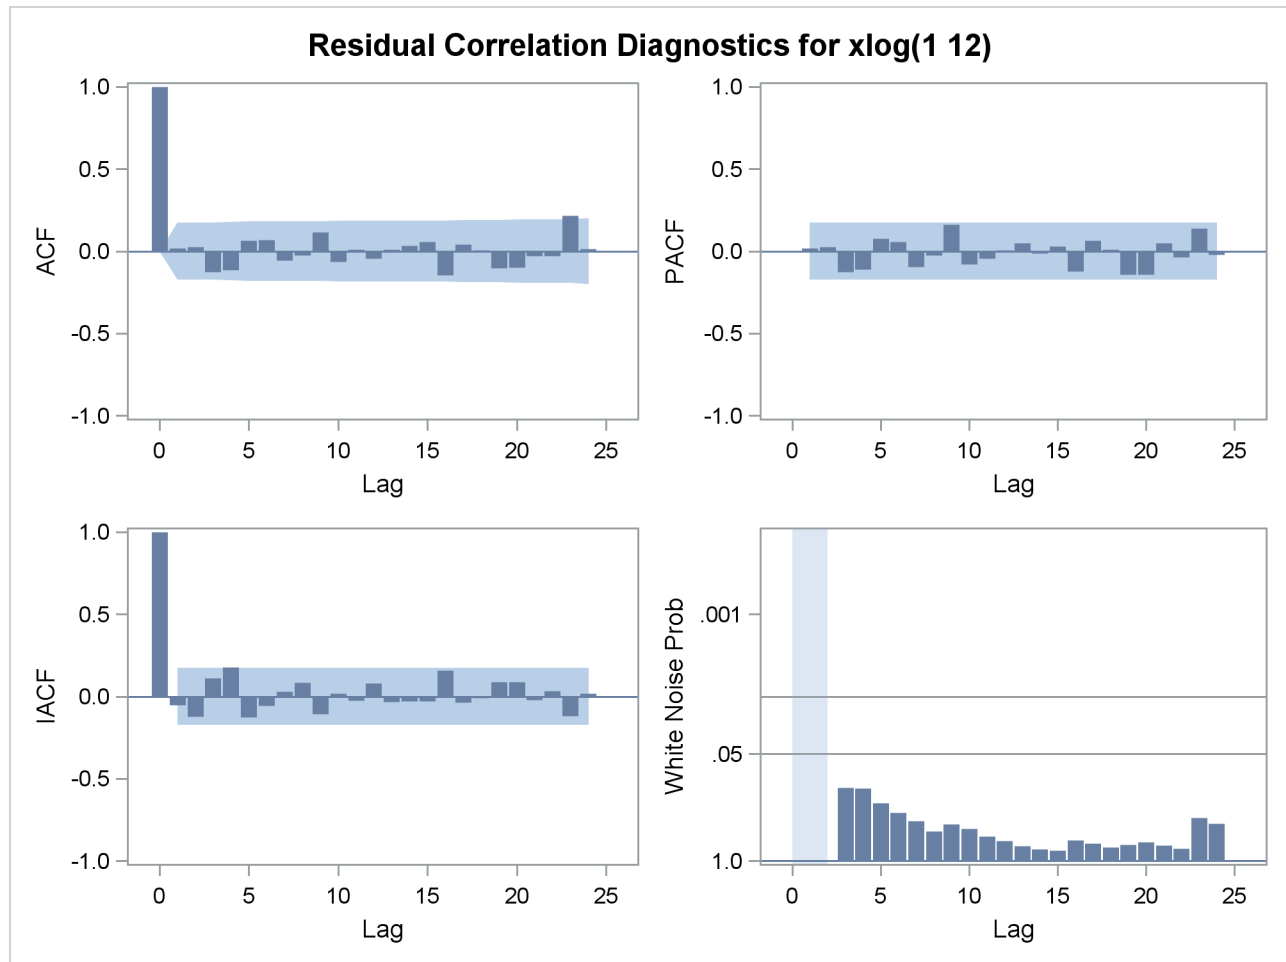
International Airline Passengers (Box and Jenkins Series-G)	
The ARIMA Procedure	
Name of Variable = xlog	
Period(s) of Differencing	1,12
Mean of Working Series	0.000291
Standard Deviation	0.045673
Number of Observations	131
Observation(s) eliminated by differencing	13

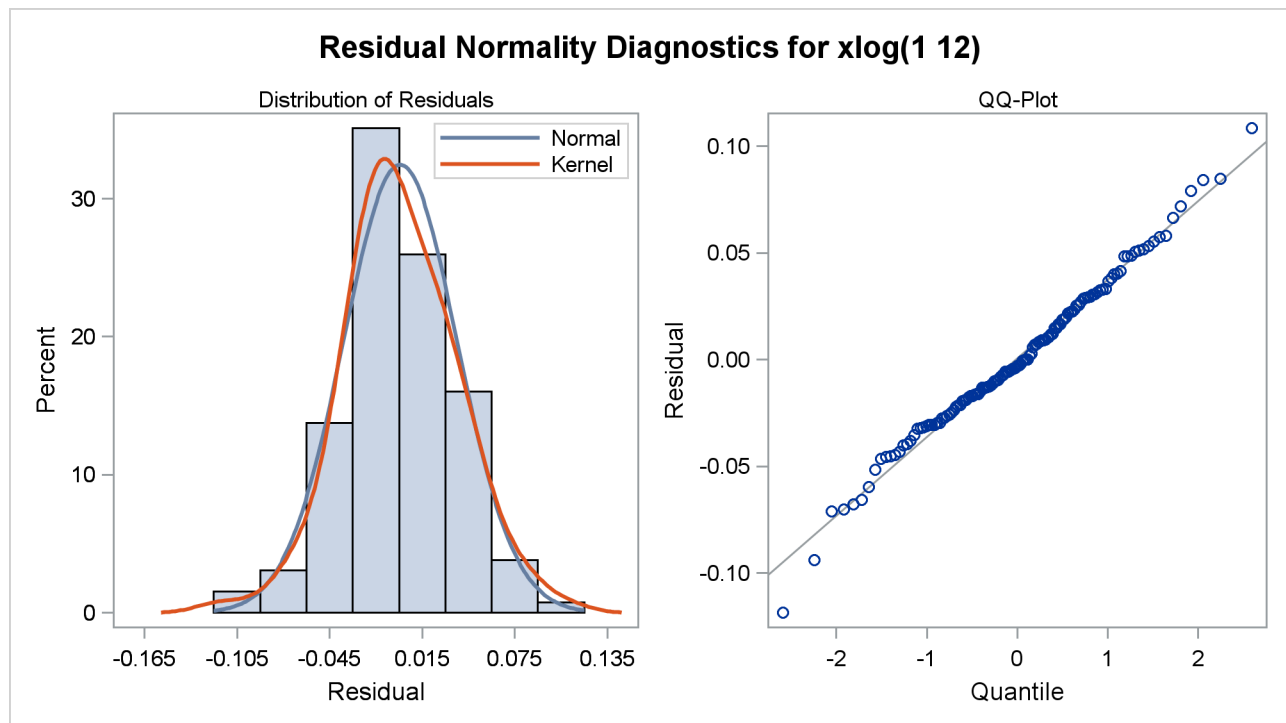
Output 7.2.3 Trend and Correlation Analysis for the Twice Differenced Series

The results of the ESTIMATE statement are shown in [Output 7.2.4](#), [Output 7.2.5](#), and [Output 7.2.6](#). The model appears to fit the data quite well.

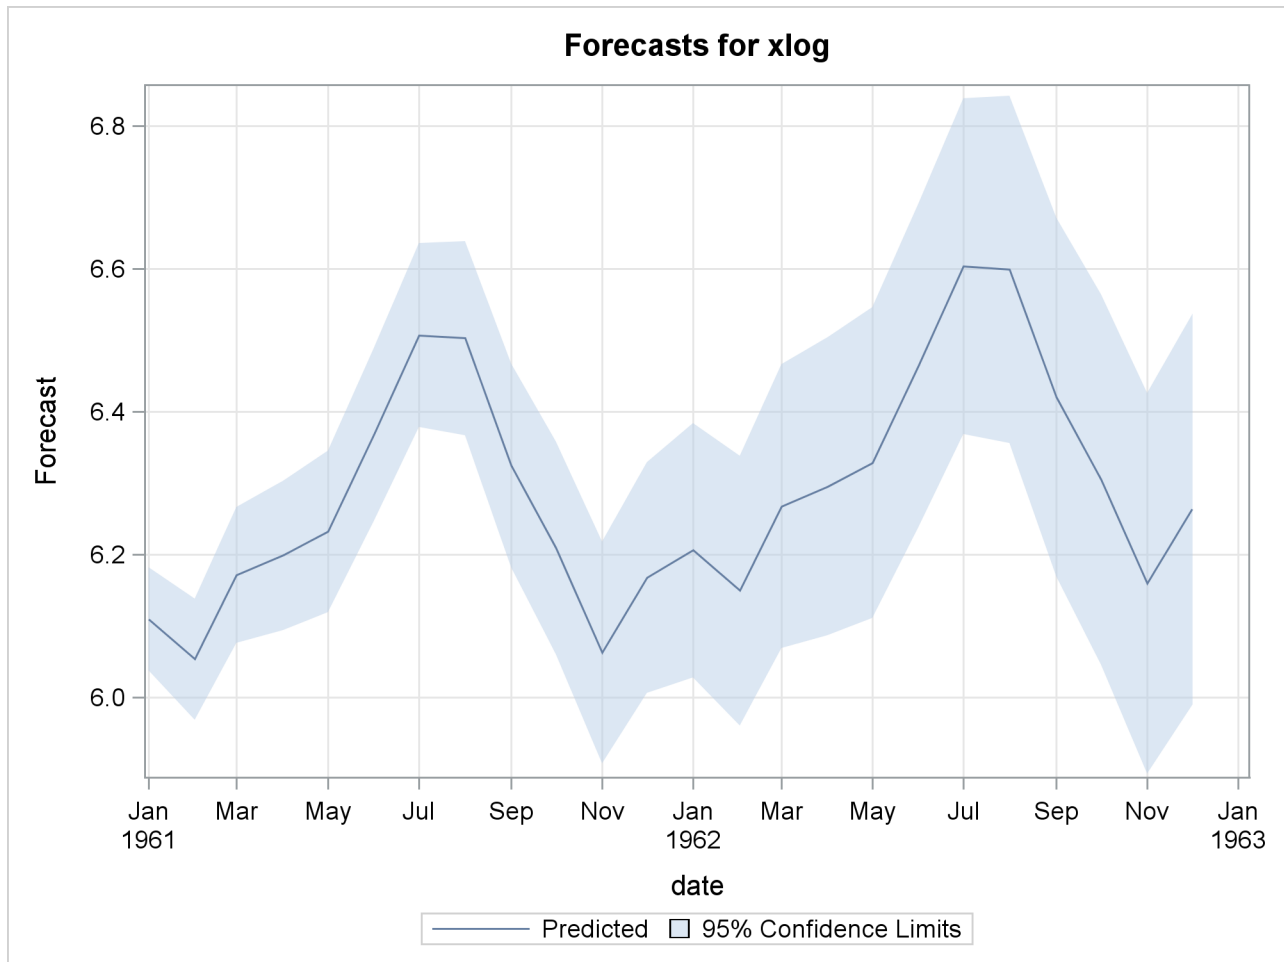
Output 7.2.4 ESTIMATE Statement Output

Maximum Likelihood Estimation					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag
MA1,1	0.40194	0.07988	5.03	<.0001	1
MA2,1	0.55686	0.08403	6.63	<.0001	12
Variance Estimate			0.001369		
Std Error Estimate			0.037		
AIC			-485.393		
SBC			-479.643		
Number of Residuals			131		
Model for variable xlog					
Period(s) of Differencing			1,12		
Moving Average Factors					
Factor 1: 1 - 0.40194 B**(1)					
Factor 2: 1 - 0.55686 B**(12)					

Output 7.2.5 Residual Analysis of the Airline Model: Correlation

Output 7.2.6 Residual Analysis of the Airline Model: Normality

The forecasts and their confidence limits for the transformed series are shown in [Output 7.2.7](#).

Output 7.2.7 Forecast Plot for the Transformed Series

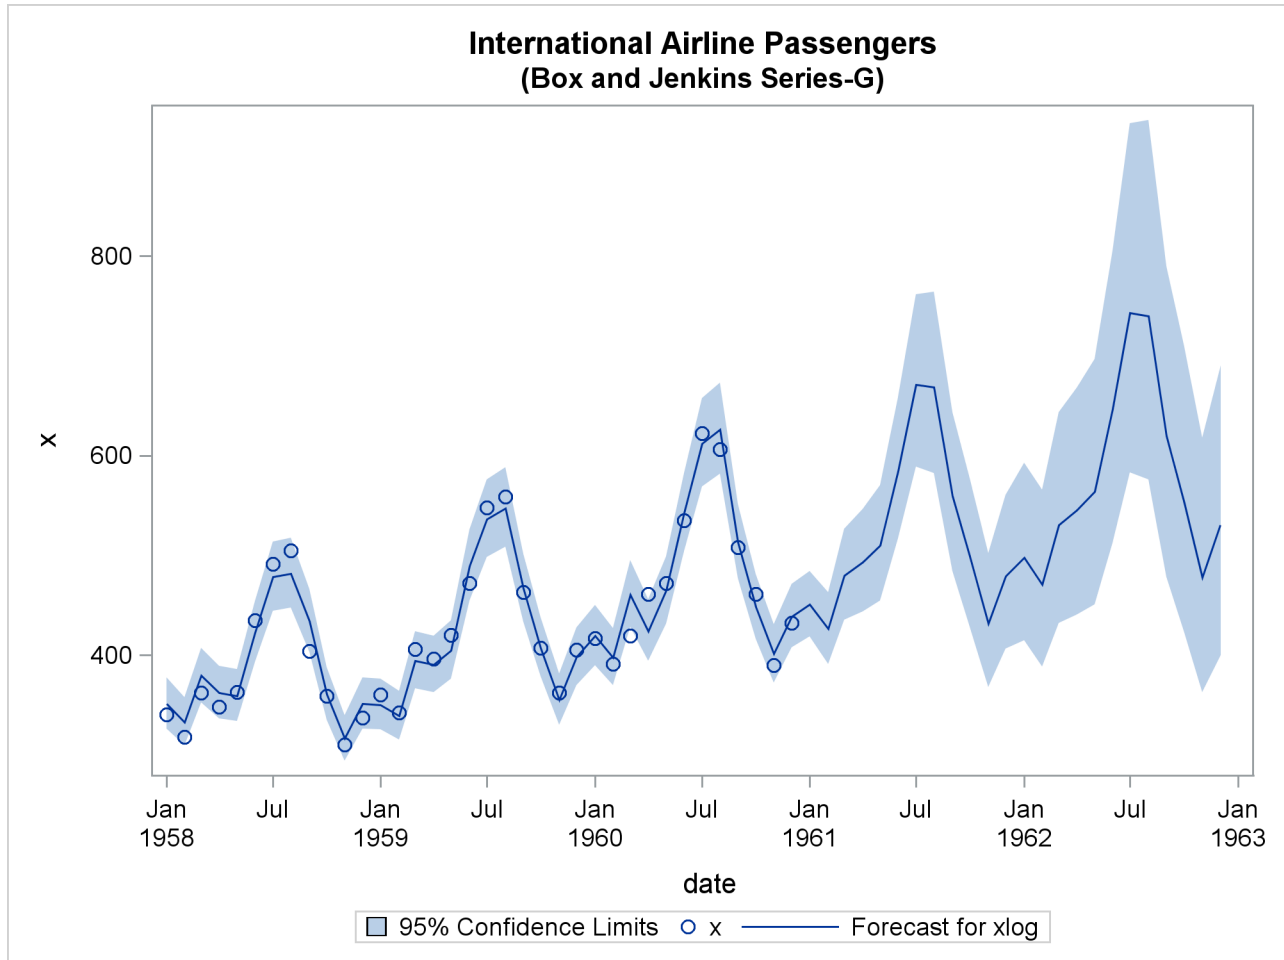
The following statements retransform the forecast values to get forecasts in the original scales. See the section “[Forecasting Log Transformed Data](#)” on page 260 for more information.

```
data c;
  set b;
  x      = exp( xlog );
  forecast = exp( forecast + std*std/2 );
  195    = exp( 195 );
  u95    = exp( u95 );
run;
```

The forecasts and their confidence limits are plotted by using the following PROC SGPLOT step. The plot is shown in [Output 7.2.8](#).

```
proc sgplot data=c;
  where date >= '1jan58'd;
  band Upper=u95 Lower=195 x=date
    / LegendLabel="95% Confidence Limits";
  scatter x=date y=x;
  series x=date y=forecast;
```

```
run;
```

Output 7.2.8 Plot of the Forecast for the Original Series

Example 7.3: Model for Series J Data from Box and Jenkins

This example uses the Series J data from Box and Jenkins (1976). First, the input series X is modeled with a univariate ARMA model. Next, the dependent series Y is cross-correlated with the input series. Since a model has been fit to X , both Y and X are prewhitened by this model before the sample cross-correlations are computed. Next, a transfer function model is fit with no structure on the noise term. The residuals from this model are analyzed; then, the full model, transfer function and noise, is fit to the data.

The following statements read 'Input Gas Rate' and 'Output CO₂' from a gas furnace. (Data values are not shown. The full example including data is in the SAS/ETS sample library.)

```
title1 'Gas Furnace Data';
title2 '(Box and Jenkins, Series J)';
data seriesj;
  input x y @@;
  label x = 'Input Gas Rate'
```

```

        y = 'Output CO2';
datalines;

... more lines ...

```

The following statements produce [Output 7.3.1](#) through [Output 7.3.11](#):

```

proc arima data=seriesj;

    /*--- Look at the input process -----*/
    identify var=x;
    run;

    /*--- Fit a model for the input -----*/
    estimate p=3 plot;
    run;

    /*--- Crosscorrelation of prewhitened series -----*/
    identify var=y crosscorr=(x) nlag=12;
    run;

    /*--- Fit a simple transfer function - look at residuals ----*/
    estimate input=( 3 $ (1,2)/(1) x );
    run;

    /*--- Final Model - look at residuals -----*/
    estimate p=2 input=( 3 $ (1,2)/(1) x );
    run;

quit;

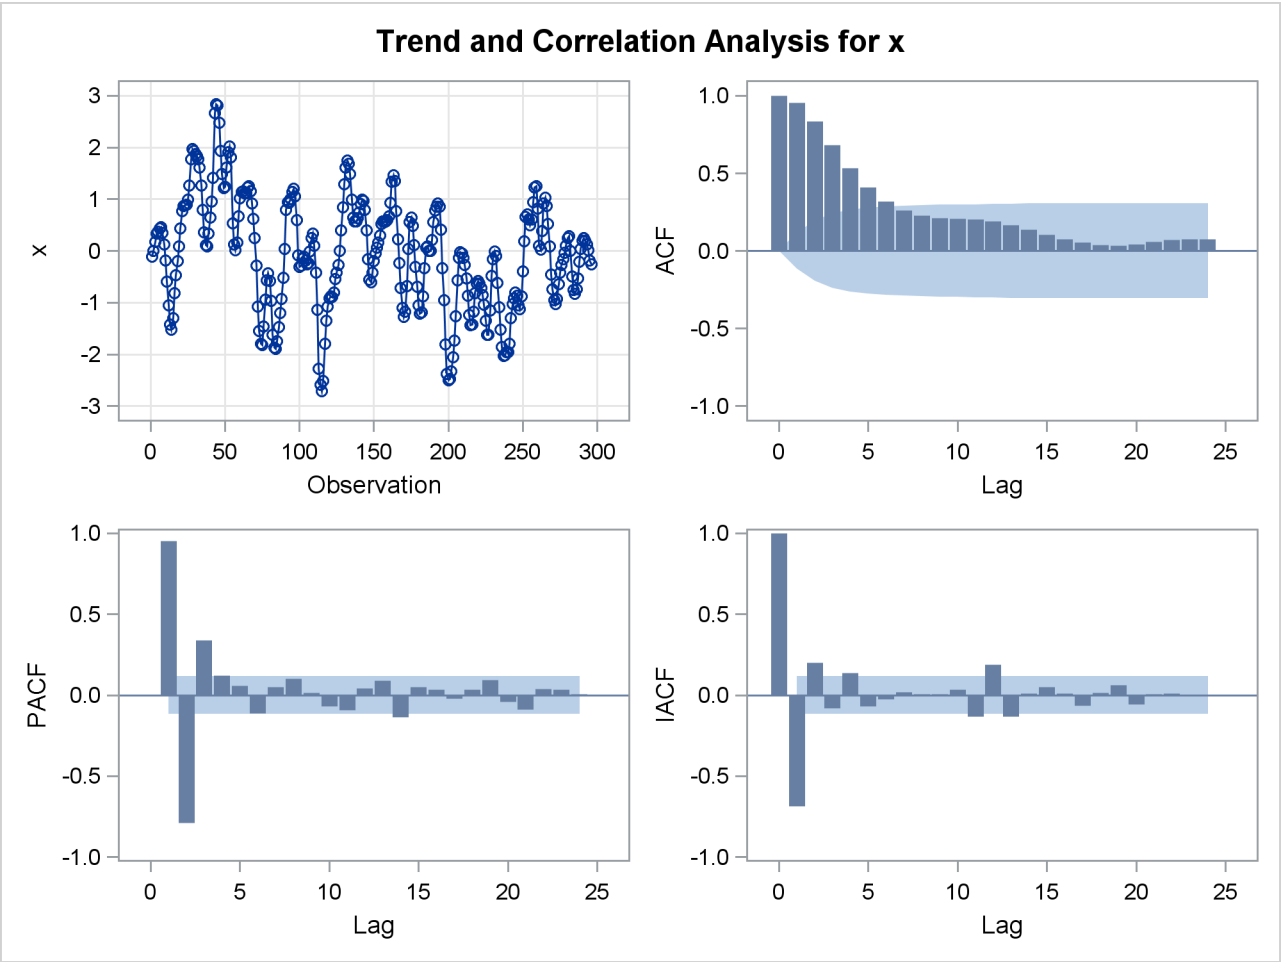
```

The results of the first IDENTIFY statement for the input series X are shown in [Output 7.3.1](#). The correlation analysis suggests an AR(3) model.

Output 7.3.1 IDENTIFY Statement Results for X

Gas Furnace Data	
(Box and Jenkins, Series J)	
The ARIMA Procedure	
Name of Variable = x	
Mean of Working Series	-0.05683
Standard Deviation	1.070952
Number of Observations	296

Output 7.3.2 IDENTIFY Statement Results for X: Trend and Correlation



The ESTIMATE statement results for the AR(3) model for the input series X are shown in [Output 7.3.3](#).

Output 7.3.3 Estimates of the AR(3) Model for X

Conditional Least Squares Estimation					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag
MU	-0.12280	0.10902	-1.13	0.2609	0
AR1,1	1.97607	0.05499	35.94	<.0001	1
AR1,2	-1.37499	0.09967	-13.80	<.0001	2
AR1,3	0.34336	0.05502	6.24	<.0001	3
Constant Estimate			-0.00682		
Variance Estimate			0.035797		
Std Error Estimate			0.1892		
AIC			-141.667		
SBC			-126.906		
Number of Residuals			296		

Output 7.3.3 *continued*

```

                Model for variable x

Estimated Mean      -0.1228

Autoregressive Factors

Factor 1:  1 - 1.97607 B**(1) + 1.37499 B**(2) - 0.34336 B**(3)

```

The IDENTIFY statement results for the dependent series Y cross-correlated with the input series X are shown in [Output 7.3.4](#), [Output 7.3.5](#), [Output 7.3.6](#), and [Output 7.3.7](#). Since a model has been fit to X, both Y and X are prewhitened by this model before the sample cross-correlations are computed.

Output 7.3.4 Summary Table: Y Cross-Correlated with X

```

                Correlation of y and x

Number of Observations      296
Variance of transformed series y  0.131438
Variance of transformed series x  0.035357

Both series have been prewhitened.

```

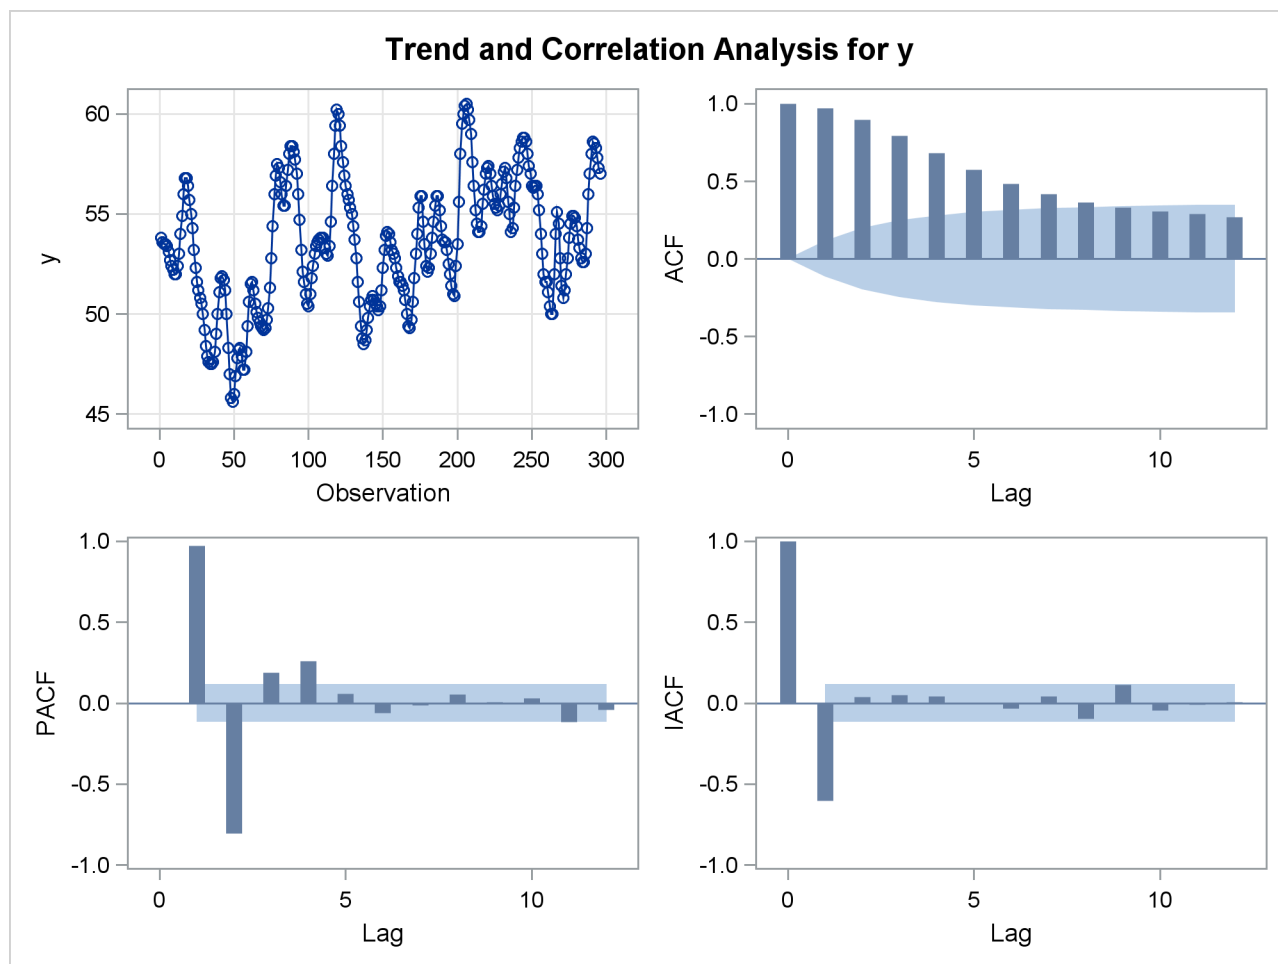
Output 7.3.5 Prewhitening Filter

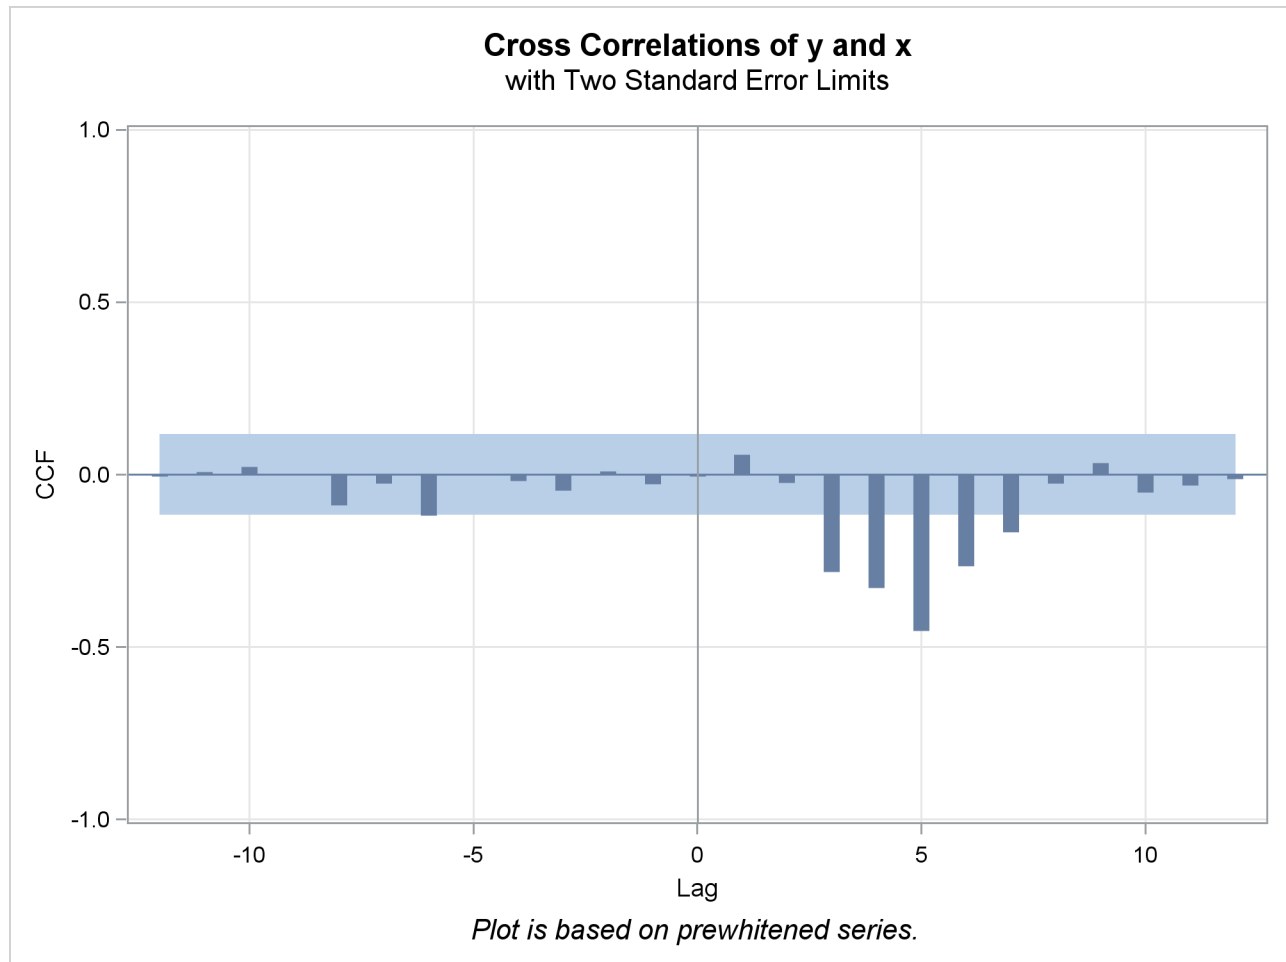
```

                Autoregressive Factors

Factor 1:  1 - 1.97607 B**(1) + 1.37499 B**(2) - 0.34336 B**(3)

```

Output 7.3.6 IDENTIFY Statement Results for Y: Trend and Correlation

Output 7.3.7 IDENTIFY Statement for Y Cross-Correlated with X

The ESTIMATE statement results for the transfer function model with no structure on the noise term are shown in [Output 7.3.8](#), [Output 7.3.9](#), and [Output 7.3.10](#).

Output 7.3.8 Estimation Output of the First Transfer Function Model

Conditional Least Squares Estimation							
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift
MU	53.32256	0.04926	1082.51	<.0001	0	y	0
NUM1	-0.56467	0.22405	-2.52	0.0123	0	x	3
NUM1,1	0.42623	0.46472	0.92	0.3598	1	x	3
NUM1,2	0.29914	0.35506	0.84	0.4002	2	x	3
DEN1,1	0.60073	0.04101	14.65	<.0001	1	x	3

Output 7.3.8 *continued*

Constant Estimate	53.32256
Variance Estimate	0.702625
Std Error Estimate	0.838227
AIC	728.0754
SBC	746.442
Number of Residuals	291

Output 7.3.9 Model Summary: First Transfer Function Model

```

Model for variable y

Estimated Intercept      53.32256

Input Number 1

Input Variable    x
Shift            3

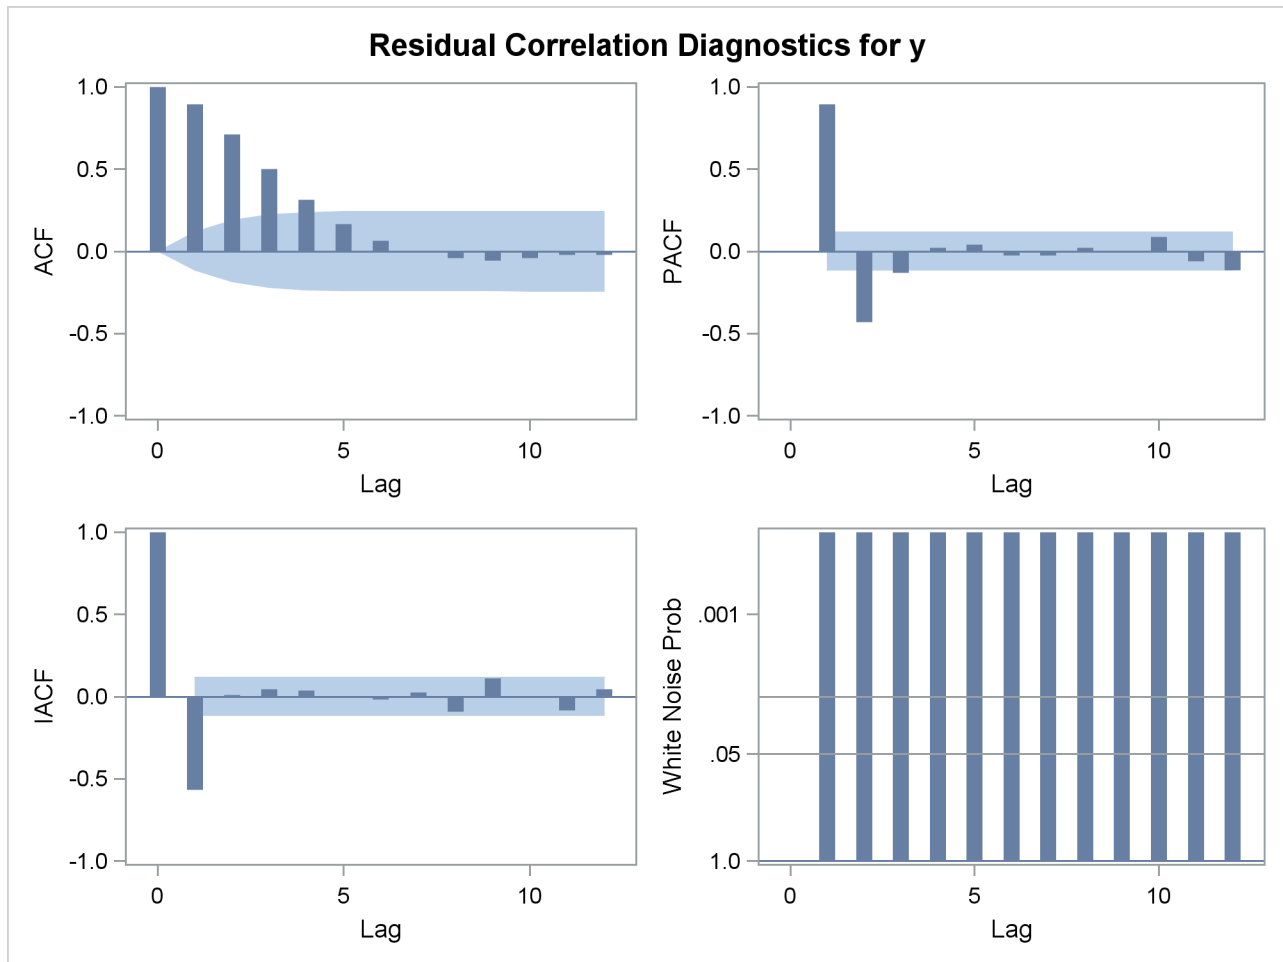
Numerator Factors

Factor 1:  -0.5647 - 0.42623 B**(1) - 0.29914 B**(2)

Denominator Factors

Factor 1:  1 - 0.60073 B**(1)

```

Output 7.3.10 Residual Analysis: First Transfer Function Model

The residual correlation analysis suggests an AR(2) model for the noise part of the model. The ESTIMATE statement results for the final transfer function model with AR(2) noise are shown in [Output 7.3.11](#).

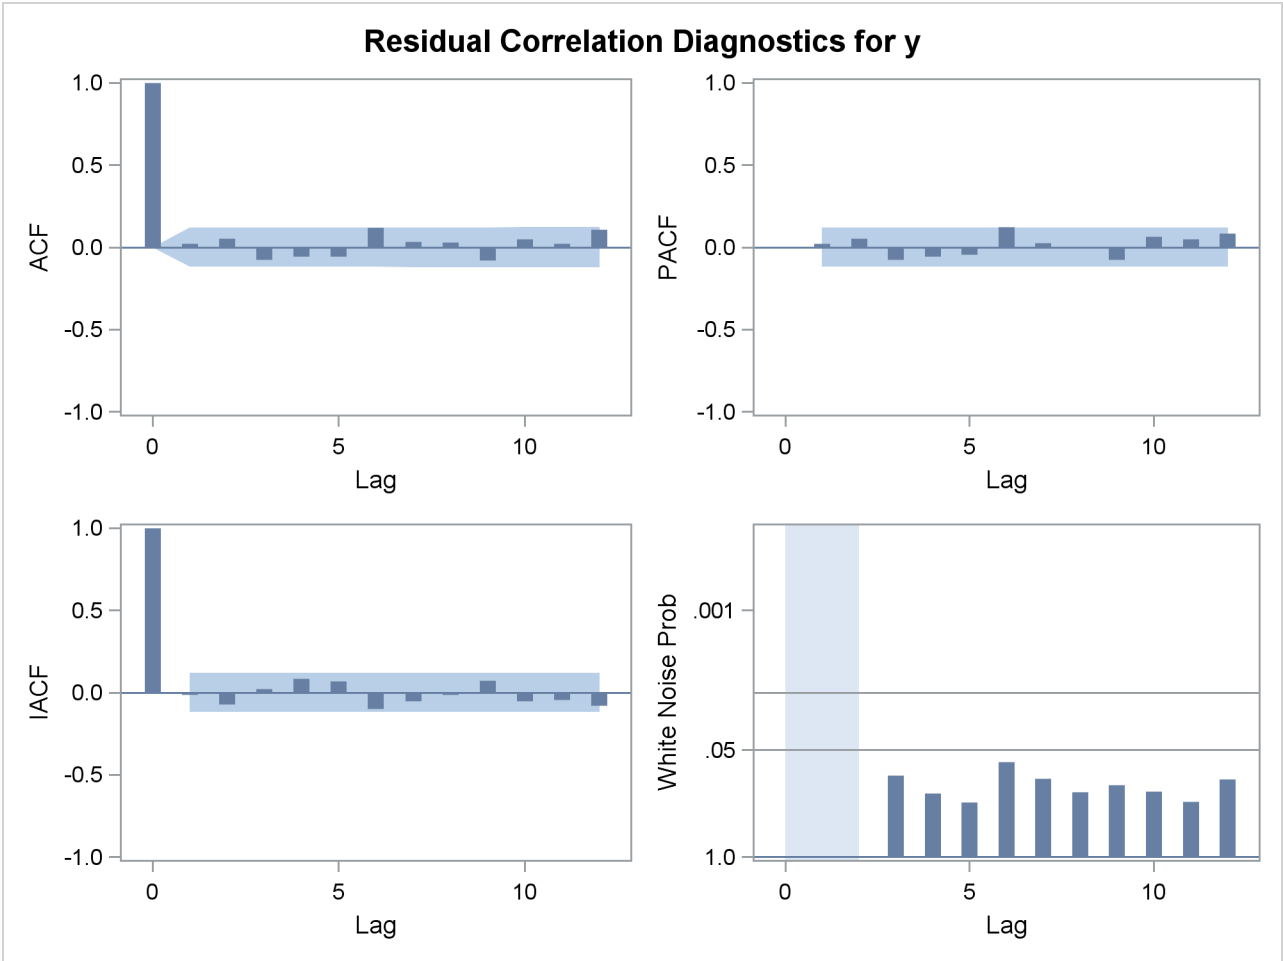
Output 7.3.11 Estimation Output of the Final Model

Conditional Least Squares Estimation							
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift
MU	53.26304	0.11929	446.48	<.0001	0	y	0
AR1,1	1.53291	0.04754	32.25	<.0001	1	y	0
AR1,2	-0.63297	0.05006	-12.64	<.0001	2	y	0
NUM1	-0.53522	0.07482	-7.15	<.0001	0	x	3
NUM1,1	0.37603	0.10287	3.66	0.0003	1	x	3
NUM1,2	0.51895	0.10783	4.81	<.0001	2	x	3
DEN1,1	0.54841	0.03822	14.35	<.0001	1	x	3

Output 7.3.11 continued

Constant Estimate	5.329425
Variance Estimate	0.058828
Std Error Estimate	0.242544
AIC	8.292809
SBC	34.00607
Number of Residuals	291

Output 7.3.12 Residual Analysis of the Final Model



Output 7.3.13 Model Summary of the Final Model

Model for variable y	
Estimated Intercept	53.26304
Autoregressive Factors	
Factor 1:	1 - 1.53291 B**(1) + 0.63297 B**(2)

Output 7.3.13 *continued*

Input Number 1	
Input Variable	x
Shift	3
Numerator Factors	
Factor 1: -0.5352 - 0.37603 B**(1) - 0.51895 B**(2)	
Denominator Factors	
Factor 1: 1 - 0.54841 B**(1)	

Example 7.4: An Intervention Model for Ozone Data

This example fits an intervention model to ozone data as suggested by Box and Tiao (1975). Notice that the response variable, OZONE, and the innovation, X1, are seasonally differenced. The final model for the differenced data is a multiple regression model with a moving-average structure assumed for the residuals.

The model is fit by maximum likelihood. The seasonal moving-average parameter and its standard error are fairly sensitive to which method is chosen to fit the model, in agreement with the observations of Davidson (1981) and Ansley and Newbold (1980); thus, fitting the model by the unconditional or conditional least squares method produces somewhat different estimates for these parameters.

Some missing values are appended to the end of the input data to generate additional values for the independent variables. Since the independent variables are not modeled, values for them must be available for any times at which predicted values are desired. In this case, predicted values are requested for 12 periods beyond the end of the data. Thus, values for X1, WINTER, and SUMMER must be given for 12 periods ahead.

The following statements read in the data and compute dummy variables for use as intervention inputs:

```

title1 'Intervention Data for Ozone Concentration';
title2 '(Box and Tiao, JASA 1975 P.70)';
data air;
  input ozone @@;
  label ozone = 'Ozone Concentration'
        x1    = 'Intervention for post 1960 period'
        summer = 'Summer Months Intervention'
        winter = 'Winter Months Intervention';
  date = intnx( 'month', '31dec1954'd, _n_ );
  format date monyy.;
  month = month( date );
  year = year( date );
  x1 = year >= 1960;
  summer = ( 5 < month < 11 ) * ( year > 1965 );
  winter = ( year > 1965 ) - summer;
datalines;

```

```

2.7  2.0  3.6  5.0  6.5  6.1  5.9  5.0  6.4  7.4  8.2  3.9
4.1  4.5  5.5  3.8  4.8  5.6  6.3  5.9  8.7  5.3  5.7  5.7
3.0  3.4  4.9  4.5  4.0  5.7  6.3  7.1  8.0  5.2  5.0  4.7

... more lines ...

```

The following statements produce [Output 7.4.1](#) through [Output 7.4.3](#):

```

proc arima data=air;

  /* Identify and seasonally difference ozone series */
  identify var=ozone(12)
           crosscorr=( x1(12) summer winter ) noprint;

  /* Fit a multiple regression with a seasonal MA model */
  /*   by the maximum likelihood method                  */
  estimate q=(1)(12) input=( x1 summer winter )
           noconstant method=ml;

  /* Forecast */
  forecast lead=12 id=date interval=month;

run;

```

The ESTIMATE statement results are shown in [Output 7.4.1](#) and [Output 7.4.2](#).

Output 7.4.1 Parameter Estimates

Intervention Data for Ozone Concentration (Box and Tiao, JASA 1975 P.70)								
The ARIMA Procedure								
Maximum Likelihood Estimation								
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift	
MA1,1	-0.26684	0.06710	-3.98	<.0001	1	ozone	0	
MA2,1	0.76665	0.05973	12.83	<.0001	12	ozone	0	
NUM1	-1.33062	0.19236	-6.92	<.0001	0	x1	0	
NUM2	-0.23936	0.05952	-4.02	<.0001	0	summer	0	
NUM3	-0.08021	0.04978	-1.61	0.1071	0	winter	0	
Variance Estimate				0.634506				
Std Error Estimate				0.796559				
AIC				501.7696				
SBC				518.3602				
Number of Residuals				204				

Output 7.4.2 Model Summary

Model for variable ozone	
Period(s) of Differencing	12
Moving Average Factors	
Factor 1:	1 + 0.26684 B**(1)
Factor 2:	1 - 0.76665 B**(12)
Input Number 1	
Input Variable	x1
Period(s) of Differencing	12
Overall Regression Factor	-1.33062

The FORECAST statement results are shown in [Output 7.4.3](#).

Output 7.4.3 Forecasts

Forecasts for variable ozone				
Obs	Forecast	Std Error	95% Confidence Limits	
217	1.4205	0.7966	-0.1407	2.9817
218	1.8446	0.8244	0.2287	3.4604
219	2.4567	0.8244	0.8408	4.0725
220	2.8590	0.8244	1.2431	4.4748
221	3.1501	0.8244	1.5342	4.7659
222	2.7211	0.8244	1.1053	4.3370
223	3.3147	0.8244	1.6989	4.9306
224	3.4787	0.8244	1.8629	5.0946
225	2.9405	0.8244	1.3247	4.5564
226	2.3587	0.8244	0.7429	3.9746
227	1.8588	0.8244	0.2429	3.4746
228	1.2898	0.8244	-0.3260	2.9057

Example 7.5: Using Diagnostics to Identify ARIMA Models

Fitting ARIMA models is as much an art as it is a science. The ARIMA procedure has diagnostic options to help tentatively identify the orders of both stationary and nonstationary ARIMA processes.

Consider the Series A in Box, Jenkins, and Reinsel (1994), which consists of 197 concentration readings taken every two hours from a chemical process. Let Series A be a data set that contains these readings in a variable named X. The following SAS statements use the SCAN option of the IDENTIFY statement to generate [Output 7.5.1](#) and [Output 7.5.2](#). See “The SCAN Method” on page 246 for details of the SCAN method.

```

/*-- Order Identification Diagnostic with SCAN Method --*/
proc arima data=SeriesA;
    identify var=x scan;
run;

```

Output 7.5.1 Example of SCAN Tables

SERIES A: Chemical Process Concentration Readings						
The ARIMA Procedure						
Squared Canonical Correlation Estimates						
Lags	MA 0	MA 1	MA 2	MA 3	MA 4	MA 5
AR 0	0.3263	0.2479	0.1654	0.1387	0.1183	0.1417
AR 1	0.0643	0.0012	0.0028	<.0001	0.0051	0.0002
AR 2	0.0061	0.0027	0.0021	0.0011	0.0017	0.0079
AR 3	0.0072	<.0001	0.0007	0.0005	0.0019	0.0021
AR 4	0.0049	0.0010	0.0014	0.0014	0.0039	0.0145
AR 5	0.0202	0.0009	0.0016	<.0001	0.0126	0.0001
SCAN Chi-Square[1] Probability Values						
Lags	MA 0	MA 1	MA 2	MA 3	MA 4	MA 5
AR 0	<.0001	<.0001	<.0001	0.0007	0.0037	0.0024
AR 1	0.0003	0.6649	0.5194	0.9235	0.3993	0.8528
AR 2	0.2754	0.5106	0.5860	0.7346	0.6782	0.2766
AR 3	0.2349	0.9812	0.7667	0.7861	0.6810	0.6546
AR 4	0.3297	0.7154	0.7113	0.6995	0.5807	0.2205
AR 5	0.0477	0.7254	0.6652	0.9576	0.2660	0.9168

In [Output 7.5.1](#), there is one (maximal) rectangular region in which all the elements are insignificant with 95% confidence. This region has a vertex at (1,1). [Output 7.5.2](#) gives recommendations based on the significance level specified by the ALPHA=*siglevel* option.

Output 7.5.2 Example of SCAN Option Tentative Order Selection

ARMA (p+d, q)	
Tentative	
Order	
Selection	
Tests	
----SCAN----	
p+d	q
1	1
(5% Significance Level)	

Another order identification diagnostic is the extended sample autocorrelation function or ESACF method.

See “The ESACF Method” on page 243 for details of the ESACF method.

The following statements generate [Output 7.5.3](#) and [Output 7.5.4](#):

```
/*-- Order Identification Diagnostic with ESACF Method --*/
proc arima data=SeriesA;
  identify var=x esacf;
run;
```

Output 7.5.3 Example of ESACF Tables

SERIES A: Chemical Process Concentration Readings						
The ARIMA Procedure						
Extended Sample Autocorrelation Function						
Lags	MA 0	MA 1	MA 2	MA 3	MA 4	MA 5
AR 0	0.5702	0.4951	0.3980	0.3557	0.3269	0.3498
AR 1	-0.3907	0.0425	-0.0605	-0.0083	-0.0651	-0.0127
AR 2	-0.2859	-0.2699	-0.0449	0.0089	-0.0509	-0.0140
AR 3	-0.5030	-0.0106	0.0946	-0.0137	-0.0148	-0.0302
AR 4	-0.4785	-0.0176	0.0827	-0.0244	-0.0149	-0.0421
AR 5	-0.3878	-0.4101	-0.1651	0.0103	-0.1741	-0.0231
ESACF Probability Values						
Lags	MA 0	MA 1	MA 2	MA 3	MA 4	MA 5
AR 0	<.0001	<.0001	0.0001	0.0014	0.0053	0.0041
AR 1	<.0001	0.5974	0.4622	0.9198	0.4292	0.8768
AR 2	<.0001	0.0002	0.6106	0.9182	0.5683	0.8592
AR 3	<.0001	0.9022	0.2400	0.8713	0.8930	0.7372
AR 4	<.0001	0.8380	0.3180	0.7737	0.8913	0.6213
AR 5	<.0001	<.0001	0.0765	0.9142	0.1038	0.8103

In [Output 7.5.3](#), there are three right-triangular regions in which all elements are insignificant at the 5% level. The triangles have vertices (1,1), (3,1), and (4,1). Since the triangle at (1,1) covers more insignificant terms, it is recommended first. Similarly, the remaining recommendations are ordered by the number of insignificant terms contained in the triangle. [Output 7.5.4](#) gives recommendations based on the significance level specified by the ALPHA=siglevel option.

Output 7.5.4 Example of ESACF Option Tentative Order Selection

```

                ARMA (p+d, q)
                Tentative
                Order
                Selection
                Tests

                ----SCAN----
                p+d          q

                  1          1

                (5% Significance Level)

```

If you also specify the SCAN option in the same IDENTIFY statement, the two recommendations are printed side by side:

```

/*-- Combination of SCAN and ESACF Methods --*/
proc arima data=SeriesA;
  identify var=x scan esacf;
run;

```

Output 7.5.5 shows the results.

Output 7.5.5 Example of SCAN and ESACF Option Combined

```

                SERIES A: Chemical Process Concentration Readings

                The ARIMA Procedure

                ARMA (p+d, q) Tentative
                Order Selection Tests

                ---SCAN---   --ESACF--
                p+d          q   p+d          q

                  1          1       1          1
                                3          1
                                4          1

                (5% Significance Level)

```

From Output 7.5.5, the autoregressive and moving-average orders are tentatively identified by both SCAN and ESACF tables to be $(p + d, q) = (1, 1)$. Because both the SCAN and ESACF indicate a $p + d$ term of 1, a unit root test should be used to determine whether this autoregressive term is a unit root. Since a moving-average term appears to be present, a large autoregressive term is appropriate for the augmented Dickey-Fuller test for a unit root.

Submitting the following statements generates Output 7.5.6:

```

/*-- Augmented Dickey-Fuller Unit Root Tests --*/

```

```
proc arima data=SeriesA;
  identify var=x stationarity=(adf=(5,6,7,8));
run;
```

Output 7.5.6 Example of STATIONARITY Option Output

SERIES A: Chemical Process Concentration Readings							
The ARIMA Procedure							
Augmented Dickey-Fuller Unit Root Tests							
Type	Lags	Rho	Pr < Rho	Tau	Pr < Tau	F	Pr > F
Zero Mean	5	0.0403	0.6913	0.42	0.8024		
	6	0.0479	0.6931	0.63	0.8508		
	7	0.0376	0.6907	0.49	0.8200		
	8	0.0354	0.6901	0.48	0.8175		
Single Mean	5	-18.4550	0.0150	-2.67	0.0821	3.67	0.1367
	6	-10.8939	0.1043	-2.02	0.2767	2.27	0.4931
	7	-10.9224	0.1035	-1.93	0.3172	2.00	0.5605
	8	-10.2992	0.1208	-1.83	0.3650	1.81	0.6108
Trend	5	-18.4360	0.0871	-2.66	0.2561	3.54	0.4703
	6	-10.8436	0.3710	-2.01	0.5939	2.04	0.7694
	7	-10.7427	0.3773	-1.90	0.6519	1.91	0.7956
	8	-10.0370	0.4236	-1.79	0.7081	1.74	0.8293

The preceding test results show that a unit root is very likely given that none of the p -values are small enough to cause you to reject the null hypothesis that the series has a unit root. Based on this test and the previous results, the series should be differenced, and an ARIMA(0,1,1) would be a good choice for a tentative model for Series A.

Using the recommendation that the series be differenced, the following statements generate **Output 7.5.7**:

```
/*-- Minimum Information Criterion --*/
proc arima data=SeriesA;
  identify var=x(1) minic;
run;
```

Output 7.5.7 Example of MINIC Table

SERIES A: Chemical Process Concentration Readings						
The ARIMA Procedure						
Minimum Information Criterion						
Lags	MA 0	MA 1	MA 2	MA 3	MA 4	MA 5
AR 0	-2.05761	-2.3497	-2.32358	-2.31298	-2.30967	-2.28528
AR 1	-2.23291	-2.32345	-2.29665	-2.28644	-2.28356	-2.26011
AR 2	-2.23947	-2.30313	-2.28084	-2.26065	-2.25685	-2.23458
AR 3	-2.25092	-2.28088	-2.25567	-2.23455	-2.22997	-2.20769
AR 4	-2.25934	-2.2778	-2.25363	-2.22983	-2.20312	-2.19531
AR 5	-2.2751	-2.26805	-2.24249	-2.21789	-2.19667	-2.17426

The error series is estimated by using an AR(7) model, and the minimum of this MINIC table is $BIC(0, 1)$. This diagnostic confirms the previous result which indicates that an ARIMA(0,1,1) is a tentative model for Series A.

If you also specify the SCAN or MINIC option in the same IDENTIFY statement as follows, the BIC associated with the SCAN table and ESACF table recommendations is listed. [Output 7.5.8](#) shows the results.

```
/*-- Combination of MINIC, SCAN and ESACF Options --*/
proc arima data=SeriesA;
  identify var=x(1) minic scan esacf;
run;
```

Output 7.5.8 Example of SCAN, ESACF, MINIC Options Combined

SERIES A: Chemical Process Concentration Readings					
The ARIMA Procedure					
ARMA(p+d,q) Tentative Order Selection Tests					
-----SCAN-----			-----ESACF-----		
p+d	q	BIC	p+d	q	BIC
0	1	-2.3497	0	1	-2.3497
			1	1	-2.32345
(5% Significance Level)					

Example 7.6: Detection of Level Changes in the Nile River Data

This example shows how to use the OUTLIER statement to detect changes in the dynamics of the time series being modeled. The time series used here is discussed in de Jong and Penzer (1998). The data consist of readings of the annual flow volume of the Nile River at Aswan from 1871 to 1970. These data have also been studied by Cobb (1978). These studies indicate that river flow levels in the years 1877 and 1913 are strong candidates for additive outliers and that there was a shift in the flow levels starting from the year 1899. This shift in 1899 is attributed partly to the weather changes and partly to the start of construction work for a new dam at Aswan. The following DATA step statements create the input data set.

```
data nile;
  input level @@;
  year = intnx( 'year', '1jan1871'd, _n_-1 );
  format year year4.;
datalines;
1120 1160 963 1210 1160 1160 813 1230 1370 1140
995 935 1110 994 1020 960 1180 799 958 1140
... more lines ...
```

The following program fits an ARIMA model, ARIMA(0,1,1), similar to the structural model suggested in de Jong and Penzer (1998). This model is also suggested by the usual correlation analysis of the series. By default, the OUTLIER statement requests detection of additive outliers and level shifts, assuming that the series follows the estimated model.

```
/*-- ARIMA(0, 1, 1) Model --*/
proc arima data=nile;
  identify var=level(1);
  estimate q=1 noint method=ml;
  outlier maxnum= 5 id=year;
run;
```

The outlier detection output is shown in [Output 7.6.1](#).

Output 7.6.1 ARIMA(0, 1, 1) Model

SERIES A: Chemical Process Concentration Readings						
The ARIMA Procedure						
Outlier Detection Summary						
Maximum number searched			5			
Number found			5			
Significance used			0.05			
Outlier Details						
Obs	Time ID	Type	Estimate	Chi-Square	Approx Prob> ChiSq	
29	1899	Shift	-315.75346	13.13	0.0003	
43	1913	Additive	-403.97105	11.83	0.0006	
7	1877	Additive	-335.49351	7.69	0.0055	
94	1964	Additive	305.03568	6.16	0.0131	
18	1888	Additive	-287.81484	6.00	0.0143	

Note that the first three outliers detected are indeed the ones discussed earlier. You can include the shock signatures that correspond to these three outliers in the Nile data set as follows:

```
data nile;
  set nile;
  AO1877 = ( year = '1jan1877'd );
  AO1913 = ( year = '1jan1913'd );
  LS1899 = ( year >= '1jan1899'd );
run;
```

Now you can refine the earlier model by including these outliers. After examining the parameter estimates and residuals (not shown) of the ARIMA(0,1,1) model with these regressors, the following stationary MA1 model (with regressors) appears to fit the data well:

```
/*-- MA1 Model with Outliers --*/
proc arima data=nile;
```

```

identify var=level
      crosscorr=( AO1877 AO1913 LS1899 );
estimate q=1
      input=( AO1877 AO1913 LS1899 )
      method=ml;
outlier maxnum=5 alpha=0.01 id=year;
run;

```

The relevant outlier detection process output is shown in [Output 7.6.2](#). No outliers, at significance level 0.01, were detected.

Output 7.6.2 MA1 Model with Outliers

SERIES A: Chemical Process Concentration Readings	
The ARIMA Procedure	
Outlier Detection Summary	
Maximum number searched	5
Number found	0
Significance used	0.01

Example 7.7: Iterative Outlier Detection

This example illustrates the iterative nature of the outlier detection process. This is done by using a simple test example where an additive outlier at observation number 50 and a level shift at observation number 100 are artificially introduced in the international airline passenger data used in [Example 7.2](#). The following DATA step shows the modifications introduced in the data set:

```

data airline;
  set sashelp.air;
  logair = log(air);
  if _n_ = 50 then logair = logair - 0.25;
  if _n_ >= 100 then logair = logair + 0.5;
run;

```

In [Example 7.2](#) the airline model, $ARIMA(0, 1, 1) \times (0, 1, 1)_{12}$, was seen to be a good fit to the unmodified log-transformed airline passenger series. The preliminary identification steps (not shown) again suggest the airline model as a suitable initial model for the modified data. The following statements specify the airline model and request an outlier search.

```

/*-- Outlier Detection --*/
proc arima data=airline;
  identify var=logair( 1, 12 ) noprint;
  estimate q= (1)(12) noint method= ml;
  outlier maxnum=3 alpha=0.01;
run;

```

The outlier detection output is shown in [Output 7.7.1](#).

Output 7.7.1 Initial Model

SERIES A: Chemical Process Concentration Readings				
The ARIMA Procedure				
Outlier Detection Summary				
Maximum number searched		3		
Number found		3		
Significance used		0.01		
Outlier Details				
Obs	Type	Estimate	Chi-Square	Approx Prob> ChiSq
100	Shift	0.49325	199.36	<.0001
50	Additive	-0.27508	104.78	<.0001
135	Additive	-0.10488	13.08	0.0003

Clearly the level shift at observation number 100 and the additive outlier at observation number 50 are the dominant outliers. Moreover, the corresponding regression coefficients seem to correctly estimate the size and sign of the change. You can augment the airline data with these two regressors, as follows:

```
data airline;
  set airline;
  if _n_ = 50 then AO = 1;
  else AO = 0.0;
  if _n_ >= 100 then LS = 1;
  else LS = 0.0;
run;
```

You can now refine the previous model by including these regressors, as follows. Note that the differencing order of the dependent series is matched to the differencing orders of the outlier regressors to get the correct “effective” outlier signatures.

```
/*-- Airline Model with Outliers --*/
proc arima data=airline;
  identify var=logair(1, 12)
    crosscorr=( AO(1, 12) LS(1, 12) )
    noprint;
  estimate q= (1) (12) noint
    input=( AO LS )
    method=ml plot;
  outlier maxnum=3 alpha=0.01;
run;
```

The outlier detection results are shown in [Output 7.7.2](#).

Output 7.7.2 Airline Model with Outliers

SERIES A: Chemical Process Concentration Readings				
The ARIMA Procedure				
Outlier Detection Summary				
Maximum number searched		3		
Number found		3		
Significance used		0.01		
Outlier Details				
Obs	Type	Estimate	Chi-Square	Approx Prob> ChiSq
135	Additive	-0.10310	12.63	0.0004
62	Additive	-0.08872	12.33	0.0004
29	Additive	0.08686	11.66	0.0006

The output shows that a few outliers still remain to be accounted for and that the model could be refined further.

References

- Akaike, H. (1974), "A New Look at the Statistical Model Identification," *IEEE Transaction on Automatic Control*, AC-19, 716–723.
- Anderson, T. W. (1971), *The Statistical Analysis of Time Series*, New York: John Wiley & Sons.
- Andrews and Herzberg (1985), *A Collection of Problems from Many Fields for the Student and Research Worker*, New York: Springer-Verlag.
- Ansley, C. (1979), "An Algorithm for the Exact Likelihood of a Mixed Autoregressive Moving-Average Process," *Biometrika*, 66, 59.
- Ansley, C. and Newbold, P. (1980), "Finite Sample Properties of Estimators for Autoregressive Moving-Average Models," *Journal of Econometrics*, 13, 159.
- Bhansali, R. J. (1980), "Autoregressive and Window Estimates of the Inverse Correlation Function," *Biometrika*, 67, 551–566.
- Box, G. E. P. and Jenkins, G. M. (1976), *Time Series Analysis: Forecasting and Control*, San Francisco: Holden-Day.
- Box, G. E. P., Jenkins, G. M., and Reinsel, G. C. (1994), *Time Series Analysis: Forecasting and Control*, Third Edition, Englewood Cliffs, NJ: Prentice Hall, 197–199.

- Box, G. E. P. and Tiao, G. C. (1975), "Intervention Analysis with Applications to Economic and Environmental Problems," *JASA*, 70, 70–79.
- Brocklebank, J. C. and Dickey, D. A. (2003), *SAS System for Forecasting Time Series*, Second Edition, Cary, North Carolina: SAS Institute Inc.
- Brockwell, P. J. and Davis, R. A. (1991), *Time Series: Theory and Methods*, Second Edition, New York: Springer-Verlag.
- Chatfield, C. (1980), "Inverse Autocorrelations," *Journal of the Royal Statistical Society*, A142, 363–377.
- Choi, ByoungSeon (1992), *ARMA Model Identification*, New York: Springer-Verlag, 129–132.
- Cleveland, W. S. (1972), "The Inverse Autocorrelations of a Time Series and Their Applications," *Technometrics*, 14, 277.
- Cobb, G. W. (1978), "The Problem of the Nile: Conditional Solution to a Change Point Problem," *Biometrika*, 65, 243–251.
- Davidson, J. (1981), "Problems with the Estimation of Moving-Average Models," *Journal of Econometrics*, 16, 295.
- Davies, N., Triggs, C. M., and Newbold, P. (1977), "Significance Levels of the Box-Pierce Portmanteau Statistic in Finite Samples," *Biometrika*, 64, 517–522.
- de Jong, P. and Penzer, J. (1998), "Diagnosing Shocks in Time Series," *Journal of the American Statistical Association*, Vol. 93, No. 442.
- Dickey, D. A. (1976), "Estimation and Testing of Nonstationary Time Series," unpublished Ph.D. thesis, Iowa State University, Ames.
- Dickey, D. A., and Fuller, W. A. (1979), "Distribution of the Estimators for Autoregressive Time Series with a Unit Root," *Journal of the American Statistical Association*, 74 (366), 427–431.
- Dickey, D. A., Hasza, D. P., and Fuller, W. A. (1984), "Testing for Unit Roots in Seasonal Time Series," *Journal of the American Statistical Association*, 79 (386), 355–367.
- Dunsmuir, William (1984), "Large Sample Properties of Estimation in Time Series Observed at Unequally Spaced Times," in *Time Series Analysis of Irregularly Observed Data*, Emanuel Parzen, ed., New York: Springer-Verlag.
- Findley, D. F., Monsell, B. C., Bell, W. R., Otto, M. C., and Chen, B. C. (1998), "New Capabilities and Methods of the X-12-ARIMA Seasonal Adjustment Program," *Journal of Business and Economic Statistics*, 16, 127–177.
- Fuller, W. A. (1976), *Introduction to Statistical Time Series*, New York: John Wiley & Sons.
- Hamilton, J. D. (1994), *Time Series Analysis*, Princeton: Princeton University Press.
- Hannan, E. J. and Rissanen, J. (1982), "Recursive Estimation of Mixed Autoregressive Moving-Average Order," *Biometrika*, 69 (1), 81–94.

- Harvey, A. C. (1981), *Time Series Models*, New York: John Wiley & Sons.
- Jones, Richard H. (1980), "Maximum Likelihood Fitting of ARMA Models to Time Series with Missing Observations," *Technometrics*, 22, 389–396.
- Kohn, R. and Ansley, C. (1985), "Efficient Estimation and Prediction in Time Series Regression Models," *Biometrika*, 72, 3, 694–697.
- Ljung, G. M. and Box, G. E. P. (1978), "On a Measure of Lack of Fit in Time Series Models," *Biometrika*, 65, 297–303.
- Montgomery, D. C. and Johnson, L. A. (1976), *Forecasting and Time Series Analysis*, New York: McGraw-Hill.
- Morf, M., Sidhu, G. S., and Kailath, T. (1974), "Some New Algorithms for Recursive Estimation on Constant Linear Discrete Time Systems," *IEEE Transactions on Automatic Control*, AC-19, 315–323.
- Nelson, C. R. (1973), *Applied Time Series for Managerial Forecasting*, San Francisco: Holden-Day.
- Newbold, P. (1981), "Some Recent Developments in Time Series Analysis," *International Statistical Review*, 49, 53–66.
- Newton, H. Joseph and Pagano, Marcello (1983), "The Finite Memory Prediction of Covariance Stationary Time Series," *SIAM Journal of Scientific and Statistical Computing*, 4, 330–339.
- Pankratz, Alan (1983), *Forecasting with Univariate Box-Jenkins Models: Concepts and Cases*, New York: John Wiley & Sons.
- Pankratz, Alan (1991), *Forecasting with Dynamic Regression Models*, New York: John Wiley & Sons.
- Pearlman, J. G. (1980), "An Algorithm for the Exact Likelihood of a High-Order Autoregressive Moving-Average Process," *Biometrika*, 67, 232–233.
- Priestly, M. B. (1981), *Spectra Analysis and Time Series, Volume 1: Univariate Series*, New York: Academic Press
- Schwarz, G. (1978), "Estimating the Dimension of a Model," *Annals of Statistics*, 6, 461–464.
- Stoffer, D. and Tolo, C. (1992), "A Note on the Ljung-Box-Pierce Portmanteau Statistic with Missing Data," *Statistics & Probability Letters* 13, 391–396.
- Tsay, R. S. and Tiao, G. C. (1984), "Consistent Estimates of Autoregressive Parameters and Extended Sample Autocorrelation Function for Stationary and Nonstationary ARMA Models," *JASA*, 79 (385), 84–96.
- Tsay, R. S. and Tiao, G. C. (1985), "Use of Canonical Analysis in Time Series Model Identification," *Biometrika*, 72 (2), 299–315.
- Woodfield, T. J. (1987), "Time Series Intervention Analysis Using SAS Software," *Proceedings of the Twelfth Annual SAS Users Group International Conference*, 331–339. Cary, NC: SAS Institute Inc.

Chapter 8

The AUTOREG Procedure

Contents

Overview: AUTOREG Procedure	314
Getting Started: AUTOREG Procedure	316
Regression with Autocorrelated Errors	316
Forecasting Autoregressive Error Models	323
Testing for Autocorrelation	325
Stepwise Autoregression	328
Testing for Heteroscedasticity	330
Heteroscedasticity and GARCH Models	334
Syntax: AUTOREG Procedure	338
Functional Summary	339
PROC AUTOREG Statement	342
BY Statement	344
CLASS Statement (Experimental)	344
MODEL Statement	344
HETERO Statement	357
NLOPTIONS Statement	359
OUTPUT Statement	360
RESTRICT Statement	362
TEST Statement	363
Details: AUTOREG Procedure	365
Missing Values	365
Autoregressive Error Model	365
Alternative Autocorrelation Correction Methods	369
GARCH Models	370
Heteroscedasticity Consistent Covariance Matrix Estimator	376
Goodness-of-Fit Measures and Information Criteria	377
Testing	380
Predicted Values	400
OUT= Data Set	405
OUTEST= Data Set	405
Printed Output	406
ODS Table Names	407
ODS Graphics	409
Examples: AUTOREG Procedure	411

Example 8.1: Analysis of Real Output Series	411
Example 8.2: Comparing Estimates and Models	415
Example 8.3: Lack-of-Fit Study	420
Example 8.4: Missing Values	424
Example 8.5: Money Demand Model	429
Example 8.6: Estimation of ARCH(2) Process	434
Example 8.7: Estimation of GARCH-Type Models	437
Example 8.8: Illustration of ODS Graphics	442
References	452

Overview: AUTOREG Procedure

The AUTOREG procedure estimates and forecasts linear regression models for time series data when the errors are autocorrelated or heteroscedastic. The autoregressive error model is used to correct for autocorrelation, and the generalized autoregressive conditional heteroscedasticity (GARCH) model and its variants are used to model and correct for heteroscedasticity.

When time series data are used in regression analysis, often the error term is not independent through time. Instead, the errors are *serially correlated (autocorrelated)*. If the error term is autocorrelated, the efficiency of ordinary least squares (OLS) parameter estimates is adversely affected and standard error estimates are biased.

The autoregressive error model corrects for serial correlation. The AUTOREG procedure can fit autoregressive error models of any order and can fit subset autoregressive models. You can also specify stepwise autoregression to select the autoregressive error model automatically.

To diagnose autocorrelation, the AUTOREG procedure produces generalized Durbin-Watson (DW) statistics and their marginal probabilities. Exact *p*-values are reported for generalized DW tests to any specified order. For models with lagged dependent regressors, PROC AUTOREG performs the Durbin *t* test and the Durbin *h* test for first-order autocorrelation and reports their marginal significance levels.

Ordinary regression analysis assumes that the error variance is the same for all observations. When the error variance is not constant, the data are said to be *heteroscedastic*, and ordinary least squares estimates are inefficient. Heteroscedasticity also affects the accuracy of forecast confidence limits. More efficient use of the data and more accurate prediction error estimates can be made by models that take the heteroscedasticity into account.

To test for heteroscedasticity, the AUTOREG procedure uses the portmanteau Q test statistics (McLeod and Li 1983), Engle's Lagrange multiplier tests (Engle 1982), tests from Lee and King (1993), and tests from Wong and Li (1995). Test statistics and significance *p*-values are reported for conditional heteroscedasticity at lags 1 through 12. The Bera-Jarque normality test statistic and its significance level are also reported to test for conditional nonnormality of residuals. The following tests for independence are also supported by the AUTOREG procedure for residual analysis and diagnostic checking: Brock-Dechert-Scheinkman (BDS) test, runs test, turning point test, and the rank version of the von Neumann ratio test.

The family of GARCH models provides a means of estimating and correcting for the changing variability of the data. The GARCH process assumes that the errors, although uncorrelated, are not independent, and it models the conditional error variance as a function of the past realizations of the series.

The AUTOREG procedure supports the following variations of the GARCH models:

- generalized ARCH (GARCH)
- integrated GARCH (IGARCH)
- exponential GARCH (EGARCH)
- quadratic GARCH (QGARCH)
- threshold GARCH (TGARCH)
- power GARCH (PGARCH)
- GARCH-in-mean (GARCH-M)

For GARCH-type models, the AUTOREG procedure produces the conditional prediction error variances in addition to parameter and covariance estimates.

The AUTOREG procedure can also analyze models that combine autoregressive errors and GARCH-type heteroscedasticity. PROC AUTOREG can output predictions of the conditional mean and variance for models with autocorrelated disturbances and changing conditional error variances over time.

Four estimation methods are supported for the autoregressive error model:

- Yule-Walker
- iterated Yule-Walker
- unconditional least squares
- exact maximum likelihood

The maximum likelihood method is used for GARCH models and for mixed AR-GARCH models.

The AUTOREG procedure produces forecasts and forecast confidence limits when future values of the independent variables are included in the input data set. PROC AUTOREG is a useful tool for forecasting because it uses the time series part of the model in addition to the systematic part in generating predicted values. The autoregressive error model takes into account recent departures from the trend in producing forecasts.

The AUTOREG procedure permits embedded missing values for the independent or dependent variables. The procedure should be used only for ordered and equally spaced time series data.

Getting Started: AUTOREG Procedure

Regression with Autocorrelated Errors

Ordinary regression analysis is based on several statistical assumptions. One key assumption is that the errors are independent of each other. However, with time series data, the ordinary regression residuals usually are correlated over time. It is not desirable to use ordinary regression analysis for time series data since the assumptions on which the classical linear regression model is based will usually be violated.

Violation of the independent errors assumption has three important consequences for ordinary regression. First, statistical tests of the significance of the parameters and the confidence limits for the predicted values are not correct. Second, the estimates of the regression coefficients are not as efficient as they would be if the autocorrelation were taken into account. Third, since the ordinary regression residuals are not independent, they contain information that can be used to improve the prediction of future values.

The AUTOREG procedure solves this problem by augmenting the regression model with an autoregressive model for the random error, thereby accounting for the autocorrelation of the errors. Instead of the usual regression model, the following autoregressive error model is used:

$$\begin{aligned} y_t &= \mathbf{x}_t' \boldsymbol{\beta} + v_t \\ v_t &= -\varphi_1 v_{t-1} - \varphi_2 v_{t-2} - \dots - \varphi_m v_{t-m} + \epsilon_t \\ \epsilon_t &\sim \text{IN}(0, \sigma^2) \end{aligned}$$

The notation $\epsilon_t \sim \text{IN}(0, \sigma^2)$ indicates that each ϵ_t is normally and independently distributed with mean 0 and variance σ^2 .

By simultaneously estimating the regression coefficients $\boldsymbol{\beta}$ and the autoregressive error model parameters φ_i , the AUTOREG procedure corrects the regression estimates for autocorrelation. Thus, this kind of regression analysis is often called *autoregressive error correction* or *serial correlation correction*.

Example of Autocorrelated Data

A simulated time series is used to introduce the AUTOREG procedure. The following statements generate a simulated time series Y with second-order autocorrelation:

```

/* Regression with Autocorrelated Errors */
data a;
  ul = 0; ull = 0;
  do time = -10 to 36;
    u = + 1.3 * ul - .5 * ull + 2*rannor(12346);
    y = 10 + .5 * time + u;
    if time > 0 then output;
    ull = ul; ul = u;
  end;
run;

```

The series Y is a time trend plus a second-order autoregressive error. The model simulated is

$$y_t = 10 + 0.5t + v_t$$

$$v_t = 1.3v_{t-1} - 0.5v_{t-2} + \epsilon_t$$

$$\epsilon_t \sim \text{IN}(0, 4)$$

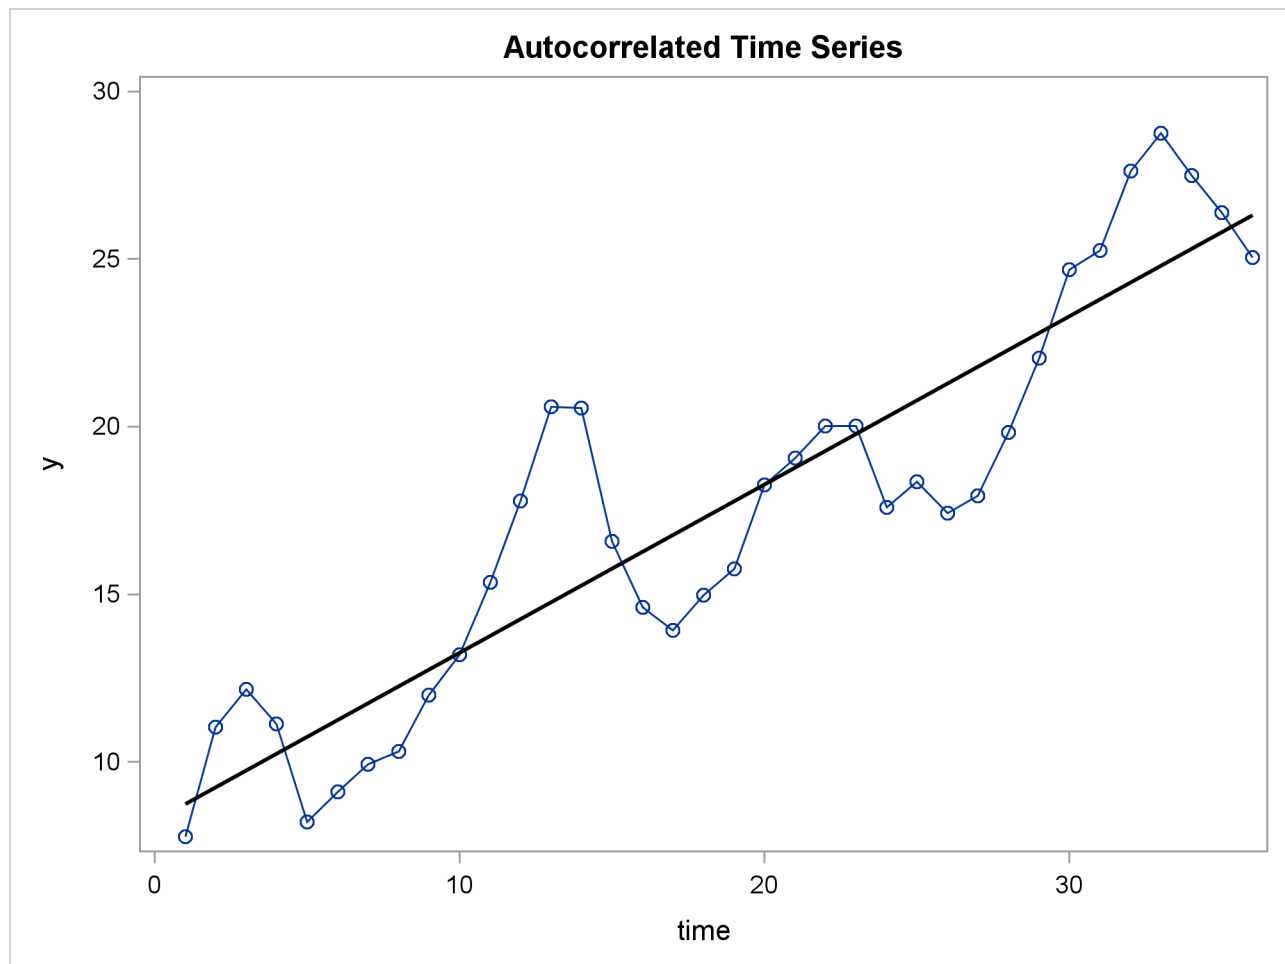
The following statements plot the simulated time series Y. A linear regression trend line is shown for reference.

```

title 'Autocorrelated Time Series';
proc sgplot data=a noautolegend;
  series x=time y=y / markers;
  reg x=time y=y/ lineattrs=(color=black);
run;

```

The plot of series Y and the regression line are shown in [Figure 8.1](#).

Figure 8.1 Autocorrelated Time Series

Note that when the series is above (or below) the OLS regression trend line, it tends to remain above (below) the trend for several periods. This pattern is an example of *positive autocorrelation*.

Time series regression usually involves independent variables other than a time trend. However, the simple time trend model is convenient for illustrating regression with autocorrelated errors, and the series Y shown in Figure 8.1 is used in the following introductory examples.

Ordinary Least Squares Regression

To use the AUTOREG procedure, specify the input data set in the PROC AUTOREG statement and specify the regression model in a MODEL statement. Specify the model by first naming the dependent variable and then listing the regressors after an equal sign, as is done in other SAS regression procedures. The following statements regress Y on TIME by using ordinary least squares:

```
proc autoreg data=a;
  model y = time;
run;
```


The AUTOREG procedure output is shown in Figure 8.2.

Figure 8.2 PROC AUTOREG Results for OLS Estimation

Autocorrelated Time Series					
The AUTOREG Procedure					
Dependent Variable y					
Ordinary Least Squares Estimates					
SSE	214.953429	DFE		34	
MSE	6.32216	Root MSE		2.51439	
SBC	173.659101	AIC		170.492063	
MAE	2.01903356	AICC		170.855699	
MAPE	12.5270666	HQC		171.597444	
Durbin-Watson	0.4752	Regress R-Square		0.8200	
		Total R-Square		0.8200	
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	8.2308	0.8559	9.62	<.0001
time	1	0.5021	0.0403	12.45	<.0001

The output first shows statistics for the model residuals. The model root mean square error (Root MSE) is 2.51, and the model R^2 is 0.82. Notice that two R^2 statistics are shown, one for the regression model (Reg Rsq) and one for the full model (Total Rsq) that includes the autoregressive error process, if any. In this case, an autoregressive error model is not used, so the two R^2 statistics are the same.

Other statistics shown are the sum of square errors (SSE), mean square error (MSE), mean absolute error (MAE), mean absolute percentage error (MAPE), error degrees of freedom (DFE, the number of observations minus the number of parameters), the information criteria SBC, HQC, AIC, and AICC, and the Durbin-Watson statistic. (Durbin-Watson statistics, MAE, MAPE, SBC, HQC, AIC, and AICC are discussed in the section “Goodness-of-Fit Measures and Information Criteria” on page 377.)

The output then shows a table of regression coefficients, with standard errors and t tests. The estimated model is

$$y_t = 8.23 + 0.502t + \epsilon_t$$

$$\text{Est. Var}(\epsilon_t) = 6.32$$

The OLS parameter estimates are reasonably close to the true values, but the estimated error variance, 6.32, is much larger than the true value, 4.

Autoregressive Error Model

The following statements regress Y on TIME with the errors assumed to follow a second-order autoregressive process. The order of the autoregressive model is specified by the NLAG=2 option. The Yule-Walker estimation method is used by default. The example uses the METHOD=ML option to specify the exact maximum likelihood method instead.

```
proc autoreg data=a;
  model y = time / nlag=2 method=ml;
run;
```

The first part of the results is shown in Figure 8.3. The initial OLS results are produced first, followed by estimates of the autocorrelations computed from the OLS residuals. The autocorrelations are also displayed graphically.

Figure 8.3 Preliminary Estimate for AR(2) Error Model

Autocorrelated Time Series																								
The AUTOREG Procedure																								
Dependent Variable y																								
Ordinary Least Squares Estimates																								
SSE	214.953429	DFE	34																					
MSE	6.32216	Root MSE	2.51439																					
SBC	173.659101	AIC	170.492063																					
MAE	2.01903356	AICC	170.855699																					
MAPE	12.5270666	HQC	171.597444																					
Durbin-Watson	0.4752	Regress R-Square	0.8200																					
		Total R-Square	0.8200																					
Parameter Estimates																								
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t																			
Intercept	1	8.2308	0.8559	9.62	<.0001																			
time	1	0.5021	0.0403	12.45	<.0001																			
Estimates of Autocorrelations																								
Lag	Covariance	Correlation	-1	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	1	
0	5.9709	1.000000													*****									
1	4.5169	0.756485													*****									
2	2.0241	0.338995													*****									
Preliminary MSE			1.7943																					

The maximum likelihood estimates are shown in Figure 8.4. Figure 8.4 also shows the preliminary Yule-Walker estimates used as starting values for the iterative computation of the maximum likelihood estimates.

Figure 8.4 Maximum Likelihood Estimates of AR(2) Error Model

Estimates of Autoregressive Parameters				
Lag	Coefficient	Standard Error	t Value	
1	-1.169057	0.148172	-7.89	
2	0.545379	0.148172	3.68	

Algorithm converged.

Maximum Likelihood Estimates			
SSE	54.7493022	DFE	32
MSE	1.71092	Root MSE	1.30802
SBC	133.476508	AIC	127.142432
MAE	0.98307236	AICC	128.432755
MAPE	6.45517689	HQC	129.353194
Log Likelihood	-59.571216	Regress R-Square	0.7280
Durbin-Watson	2.2761	Total R-Square	0.9542
		Observations	36

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	7.8833	1.1693	6.74	<.0001
time	1	0.5096	0.0551	9.25	<.0001
AR1	1	-1.2464	0.1385	-9.00	<.0001
AR2	1	0.6283	0.1366	4.60	<.0001

Autoregressive parameters assumed given

Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	7.8833	1.1678	6.75	<.0001
time	1	0.5096	0.0551	9.26	<.0001

The diagnostic statistics and parameter estimates tables in Figure 8.4 have the same form as in the OLS output, but the values shown are for the autoregressive error model. The MSE for the autoregressive model is 1.71, which is much smaller than the true value of 4. In small samples, the autoregressive error model tends to underestimate σ^2 , while the OLS MSE overestimates σ^2 .

Notice that the total R^2 statistic computed from the autoregressive model residuals is 0.954, reflecting the improved fit from the use of past residuals to help predict the next Y value. The Reg Rsq value 0.728 is the R^2 statistic for a regression of transformed variables adjusted for the estimated autocorrelation. (This is not the R^2 for the estimated trend line. For details, see the section “Goodness-of-Fit Measures and Information Criteria” on page 377 later in this chapter.)

The parameter estimates table shows the ML estimates of the regression coefficients and includes two additional rows for the estimates of the autoregressive parameters, labeled AR(1) and AR(2).

The estimated model is

$$y_t = 7.88 + 0.5096t + v_t$$

$$v_t = 1.25v_{t-1} - 0.628v_{t-2} + \epsilon_t$$

$$Est. Var(\epsilon_t) = 1.71$$

Note that the signs of the autoregressive parameters shown in this equation for v_t are the reverse of the estimates shown in the AUTOREG procedure output. Figure 8.4 also shows the estimates of the regression coefficients with the standard errors recomputed on the assumption that the autoregressive parameter estimates equal the true values.

Predicted Values and Residuals

The AUTOREG procedure can produce two kinds of predicted values and corresponding residuals and confidence limits. The first kind of predicted value is obtained from only the structural part of the model, $\mathbf{x}_t'\mathbf{b}$. This is an estimate of the unconditional mean of the response variable at time t . For the time trend model, these predicted values trace the estimated trend. The second kind of predicted value includes both the structural part of the model and the predicted values of the autoregressive error process. The full model (conditional) predictions are used to forecast future values.

Use the OUTPUT statement to store predicted values and residuals in a SAS data set and to output other values such as confidence limits and variance estimates. The P= option specifies an output variable to contain the full model predicted values. The PM= option names an output variable for the predicted mean. The R= and RM= options specify output variables for the corresponding residuals, computed as the actual value minus the predicted value.

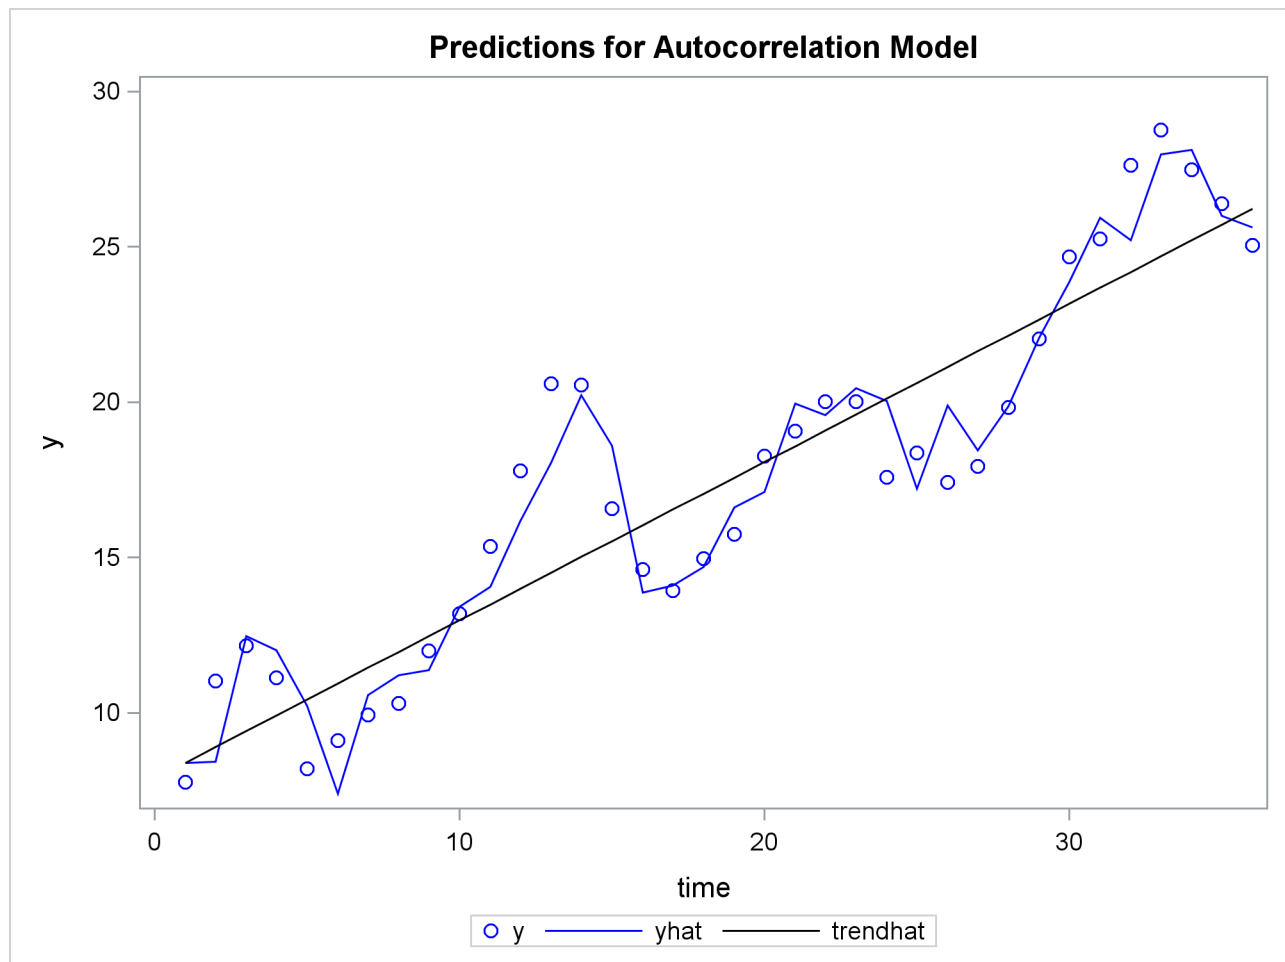
The following statements store both kinds of predicted values in the output data set. (The printed output is the same as previously shown in Figure 8.3 and Figure 8.4.)

```
proc autoreg data=a;
  model y = time / nlag=2 method=ml;
  output out=p p=yhat pm=trendhat;
run;
```

The following statements plot the predicted values from the regression trend line and from the full model together with the actual values:

```
title 'Predictions for Autocorrelation Model';
proc sgplot data=p;
  scatter x=time y=y / markerattrs=(color=blue);
  series x=time y=yhat / lineattrs=(color=blue);
  series x=time y=trendhat / lineattrs=(color=black);
run;
```

The plot of predicted values is shown in Figure 8.5.

Figure 8.5 PROC AUTOREG Predictions

In Figure 8.5 the straight line is the autocorrelation corrected regression line, traced out by the structural predicted values TRENDHAT. The jagged line traces the full model prediction values. The actual values are marked by asterisks. This plot graphically illustrates the improvement in fit provided by the autoregressive error process for highly autocorrelated data.

Forecasting Autoregressive Error Models

To produce forecasts for future periods, include observations for the forecast periods in the input data set. The forecast observations must provide values for the independent variables and have missing values for the response variable.

For the time trend model, the only regressor is time. The following statements add observations for time periods 37 through 46 to the data set A to produce an augmented data set B:

```

data b;
  y = .;
  do time = 37 to 46; output; end;
run;

data b;
  merge a b;
  by time;
run;

```

To produce the forecast, use the augmented data set as input to PROC AUTOREG, and specify the appropriate options in the OUTPUT statement. The following statements produce forecasts for the time trend with autoregressive error model. The output data set includes all the variables in the input data set, the forecast values (YHAT), the predicted trend (YTREND), and the upper (UCL) and lower (LCL) 95% confidence limits.

```

proc autoreg data=b;
  model y = time / nlag=2 method=ml;
  output out=p p=yhat pm=ytrend
          lcl=lcl ucl=ucl;
run;

```

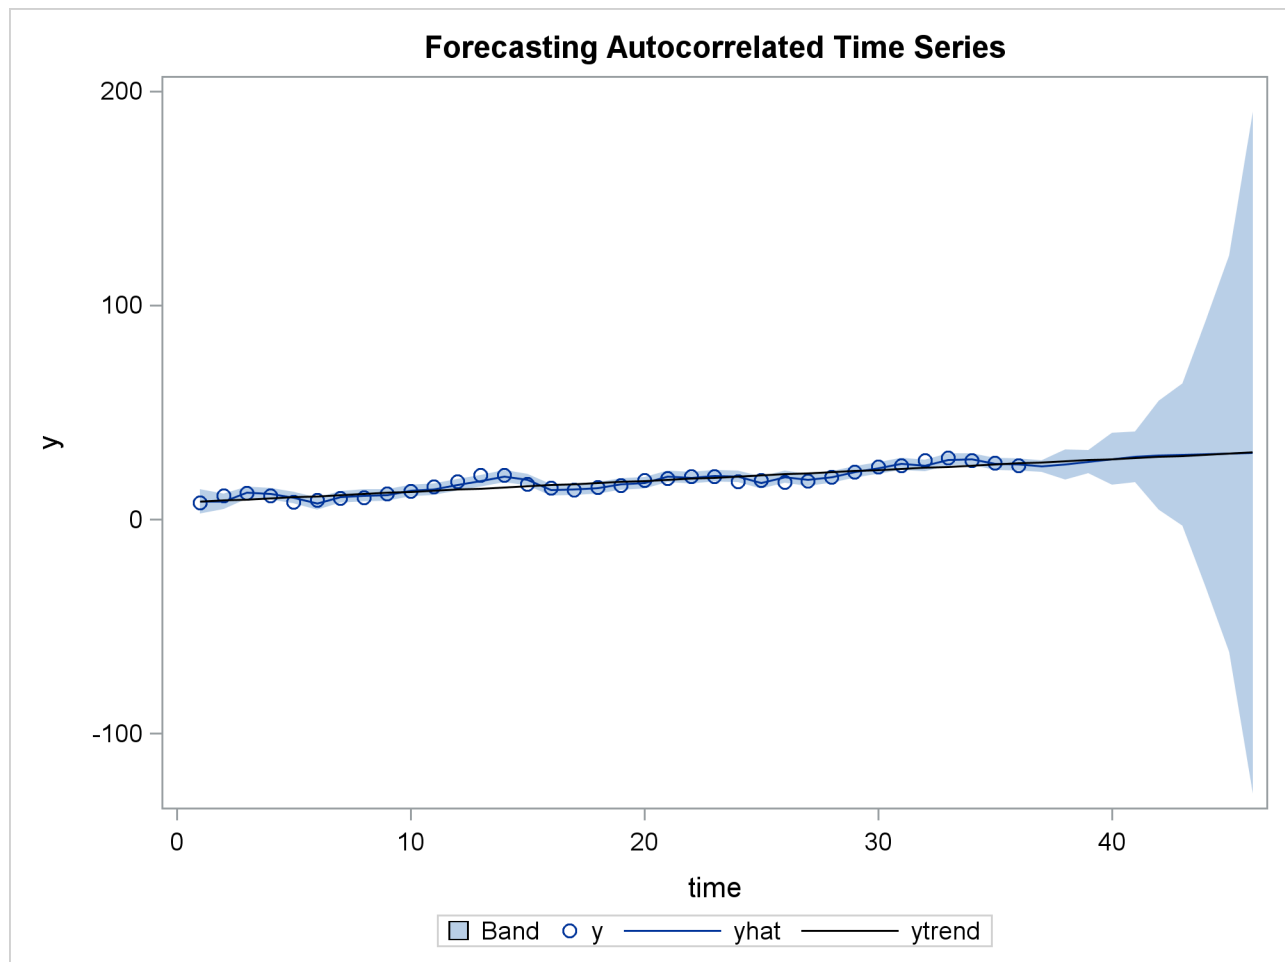
The following statements plot the predicted values and confidence limits, and they also plot the trend line for reference. The actual observations are shown for periods 16 through 36, and a reference line is drawn at the start of the out-of-sample forecasts.

```

title 'Forecasting Autocorrelated Time Series';
proc sgplot data=p;
  band x=time upper=ucl lower=lcl;
  scatter x=time y=y;
  series x=time y=yhat;
  series x=time y=ytrend / lineattrs=(color=black);
run;

```

The plot is shown in [Figure 8.6](#). Notice that the forecasts take into account the recent departures from the trend but converge back to the trend line for longer forecast horizons.

Figure 8.6 PROC AUTOREG Forecasts

Testing for Autocorrelation

In the preceding section, it is assumed that the order of the autoregressive process is known. In practice, you need to test for the presence of autocorrelation.

The Durbin-Watson test is a widely used method of testing for autocorrelation. The first-order Durbin-Watson statistic is printed by default. This statistic can be used to test for first-order autocorrelation. Use the DWPROB option to print the significance level (p -values) for the Durbin-Watson tests. (Since the Durbin-Watson p -values are computationally expensive, they are not reported by default.)

You can use the DW= option to request higher-order Durbin-Watson statistics. Since the ordinary Durbin-Watson statistic tests only for first-order autocorrelation, the Durbin-Watson statistics for higher-order autocorrelation are called *generalized Durbin-Watson statistics*.

The following statements perform the Durbin-Watson test for autocorrelation in the OLS residuals for orders 1 through 4. The DWPROB option prints the marginal significance levels (p -values) for the Durbin-Watson statistics.

```

/*-- Durbin-Watson test for autocorrelation --*/
proc autoreg data=a;
  model y = time / dw=4 dwprob;
run;

```

The AUTOREG procedure output is shown in Figure 8.7. In this case, the first-order Durbin-Watson test is highly significant, with $p < .0001$ for the hypothesis of no first-order autocorrelation. Thus, autocorrelation correction is needed.

Figure 8.7 Durbin-Watson Test Results for OLS Residuals

Forecasting Autocorrelated Time Series					
The AUTOREG Procedure					
Dependent Variable		y			
Ordinary Least Squares Estimates					
SSE	214.953429	DFE	34		
MSE	6.32216	Root MSE	2.51439		
SBC	173.659101	AIC	170.492063		
MAE	2.01903356	AICC	170.855699		
MAPE	12.5270666	HQC	171.597444		
		Regress R-Square	0.8200		
		Total R-Square	0.8200		
Durbin-Watson Statistics					
Order	DW	Pr < DW	Pr > DW		
1	0.4752	<.0001	1.0000		
2	1.2935	0.0137	0.9863		
3	2.0694	0.6545	0.3455		
4	2.5544	0.9818	0.0182		
NOTE: Pr<DW is the p-value for testing positive autocorrelation, and Pr>DW is the p-value for testing negative autocorrelation.					
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	8.2308	0.8559	9.62	<.0001
time	1	0.5021	0.0403	12.45	<.0001

Using the Durbin-Watson test, you can decide if autocorrelation correction is needed. However, generalized Durbin-Watson tests should not be used to decide on the autoregressive order. The higher-order tests assume the absence of lower-order autocorrelation. If the ordinary Durbin-Watson test indicates no first-order autocorrelation, you can use the second-order test to check for second-order autocorrelation. Once autocorrelation is detected, further tests at higher orders are not appropriate. In Figure 8.7, since the first-order Durbin-Watson test is significant, the order 2, 3, and 4 tests can be ignored.

When using Durbin-Watson tests to check for autocorrelation, you should specify an order at least as large as the order of any potential seasonality, since seasonality produces autocorrelation at the seasonal lag. For example, for quarterly data use $DW=4$, and for monthly data use $DW=12$.

Lagged Dependent Variables

The Durbin-Watson tests are not valid when the lagged dependent variable is used in the regression model. In this case, the Durbin h test or Durbin t test can be used to test for first-order autocorrelation.

For the Durbin h test, specify the name of the lagged dependent variable in the LAGDEP= option. For the Durbin t test, specify the LAGDEP option without giving the name of the lagged dependent variable.

For example, the following statements add the variable YLAG to the data set A and regress Y on YLAG instead of TIME:

```
data b;
  set a;
  ylag = lag1( y );
run;

proc autoreg data=b;
  model y = ylag / lagdep=ylag;
run;
```

The results are shown in [Figure 8.8](#). The Durbin h statistic 2.78 is significant with a p -value of 0.0027, indicating autocorrelation.

Figure 8.8 Durbin h Test with a Lagged Dependent Variable

Forecasting Autocorrelated Time Series			
The AUTOREG Procedure			
Dependent Variable		y	
Ordinary Least Squares Estimates			
SSE	97.711226	DFE	33
MSE	2.96095	Root MSE	1.72074
SBC	142.369787	AIC	139.259091
MAE	1.29949385	AICC	139.634091
MAPE	8.1922836	HQC	140.332903
		Regress R-Square	0.9109
		Total R-Square	0.9109
Miscellaneous Statistics			
Statistic	Value	Prob	Label
Durbin h	2.7814	0.0027	Pr > h

Figure 8.8 continued

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	1.5742	0.9300	1.69	0.0999
ylag	1	0.9376	0.0510	18.37	<.0001

Stepwise Autoregression

Once you determine that autocorrelation correction is needed, you must select the order of the autoregressive error model to use. One way to select the order of the autoregressive error model is *stepwise autoregression*. The stepwise autoregression method initially fits a high-order model with many autoregressive lags and then sequentially removes autoregressive parameters until all remaining autoregressive parameters have significant *t* tests.

To use stepwise autoregression, specify the BACKSTEP option, and specify a large order with the NLAG= option. The following statements show the stepwise feature, using an initial order of 5:

```
/*-- stepwise autoregression --*/
proc autoreg data=a;
  model y = time / method=ml nlag=5 backstep;
run;
```

The results are shown in Figure 8.9.

Figure 8.9 Stepwise Autoregression

Forecasting Autocorrelated Time Series			
The AUTOREG Procedure			
Dependent Variable		y	
Ordinary Least Squares Estimates			
SSE	214.953429	DFE	34
MSE	6.32216	Root MSE	2.51439
SBC	173.659101	AIC	170.492063
MAE	2.01903356	AICC	170.855699
MAPE	12.5270666	HQC	171.597444
Durbin-Watson	0.4752	Regress R-Square	0.8200
		Total R-Square	0.8200

Figure 8.9 *continued*

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	8.2308	0.8559	9.62	<.0001
time	1	0.5021	0.0403	12.45	<.0001

Estimates of Autocorrelations																							
Lag	Covariance	Correlation	-1	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	1
0	5.9709	1.000000																					
1	4.5169	0.756485																					
2	2.0241	0.338995																					
3	-0.4402	-0.073725											*										
4	-2.1175	-0.354632											*****										
5	-2.8534	-0.477887											*****										

Backward Elimination of Autoregressive Terms				
Lag	Estimate	t Value	Pr > t	
4	-0.052908	-0.20	0.8442	
3	0.115986	0.57	0.5698	
5	0.131734	1.21	0.2340	

The estimates of the autocorrelations are shown for 5 lags. The backward elimination of autoregressive terms report shows that the autoregressive parameters at lags 3, 4, and 5 were insignificant and eliminated, resulting in the second-order model shown previously in Figure 8.4. By default, retained autoregressive parameters must be significant at the 0.05 level, but you can control this with the SLSTAY= option. The remainder of the output from this example is the same as that in Figure 8.3 and Figure 8.4, and it is not repeated here.

The stepwise autoregressive process is performed using the Yule-Walker method. The maximum likelihood estimates are produced after the order of the model is determined from the significance tests of the preliminary Yule-Walker estimates.

When using stepwise autoregression, it is a good idea to specify an NLAG= option value larger than the order of any potential seasonality, since seasonality produces autocorrelation at the seasonal lag. For example, for monthly data use NLAG=13, and for quarterly data use NLAG=5.

Subset and Factored Models

In the previous example, the BACKSTEP option dropped lags 3, 4, and 5, leaving a second-order model. However, in other cases a parameter at a longer lag may be kept while some smaller lags are dropped. For example, the stepwise autoregression method might drop lags 2, 3, and 5 but keep lags 1 and 4. This is

called a *subset model*, since the number of estimated autoregressive parameters is lower than the order of the model.

Subset models are common for seasonal data and often correspond to *factored* autoregressive models. A factored model is the product of simpler autoregressive models. For example, the best model for seasonal monthly data may be the combination of a first-order model for recent effects with a 12th-order subset model for the seasonality, with a single parameter at lag 12. This results in a 13th-order subset model with nonzero parameters at lags 1, 12, and 13. See Chapter 7, “[The ARIMA Procedure](#),” for further discussion of subset and factored autoregressive models.

You can specify subset models with the NLAG= option. List the lags to include in the autoregressive model within parentheses. The following statements show an example of specifying the subset model resulting from the combination of a first-order process for recent effects with a fourth-order seasonal process:

```
/*-- specifying the lags --*/
proc autoreg data=a;
  model y = time / nlag=(1 4 5);
run;
```

The MODEL statement specifies the following fifth-order autoregressive error model:

$$y_t = a + bt + v_t$$

$$v_t = -\phi_1 v_{t-1} - \phi_4 v_{t-4} - \phi_5 v_{t-5} + \epsilon_t$$

Testing for Heteroscedasticity

One of the key assumptions of the ordinary regression model is that the errors have the same variance throughout the sample. This is also called the *homoscedasticity* model. If the error variance is not constant, the data are said to be *heteroscedastic*.

Since ordinary least squares regression assumes constant error variance, heteroscedasticity causes the OLS estimates to be inefficient. Models that take into account the changing variance can make more efficient use of the data. Also, heteroscedasticity can make the OLS forecast error variance inaccurate because the predicted forecast variance is based on the average variance instead of on the variability at the end of the series.

To illustrate heteroscedastic time series, the following statements create the simulated series Y. The variable Y has an error variance that changes from 1 to 4 in the middle part of the series.

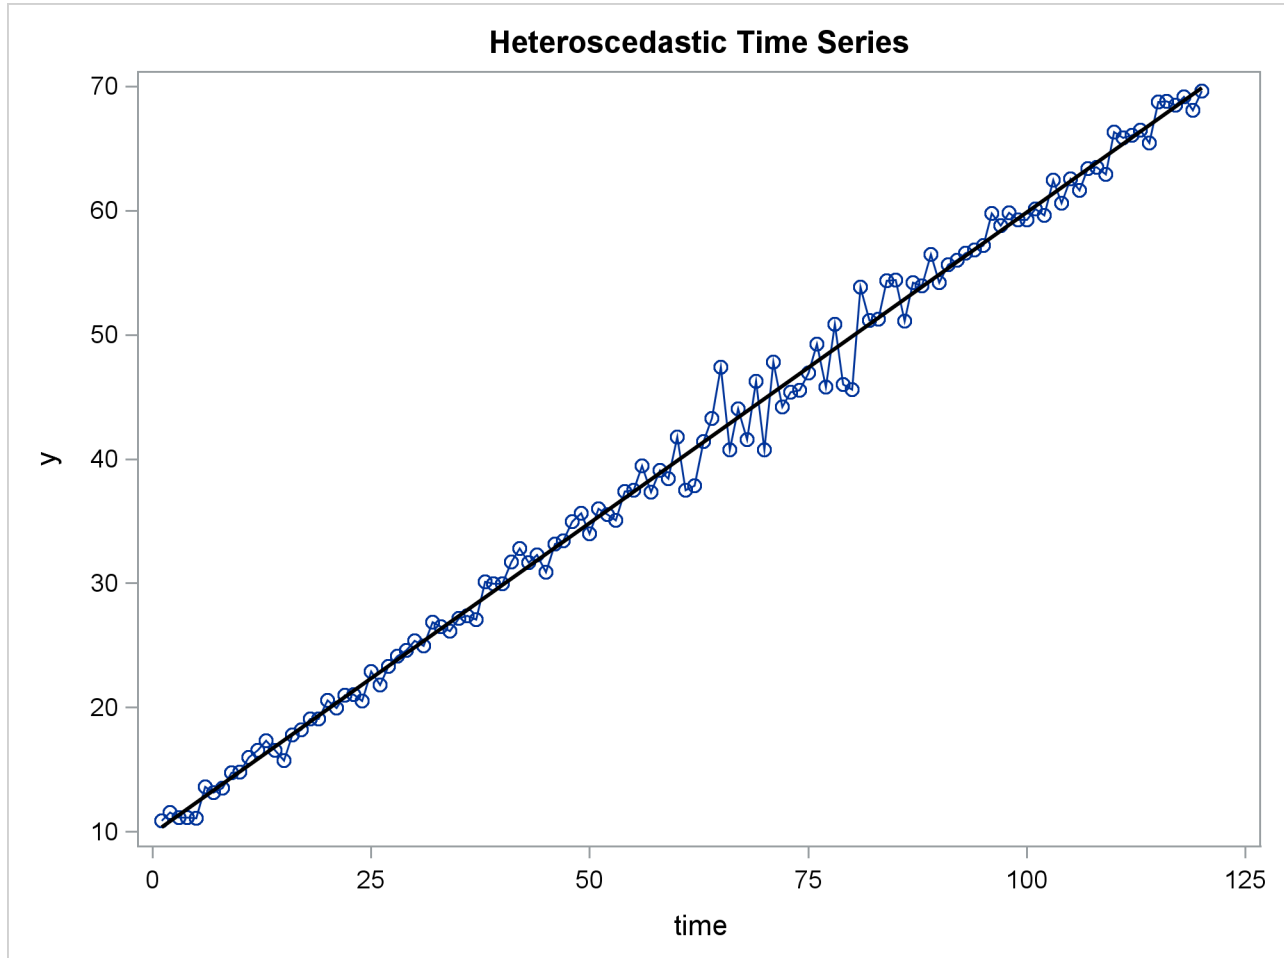
```
data a;
  do time = -10 to 120;
    s = 1 + (time >= 60 & time < 90);
    u = s*rannor(12346);
    y = 10 + .5 * time + u;
    if time > 0 then output;
  end;
run;

title 'Heteroscedastic Time Series';
```

```
proc sgplot data=a noautolegend;
  series x=time y=y / markers;
  reg x=time y=y / lineattrs=(color=black);
run;
```

The simulated series is plotted in Figure 8.10.

Figure 8.10 Heteroscedastic and Autocorrelated Series



To test for heteroscedasticity with PROC AUTOREG, specify the ARCHTEST option. The following statements regress Y on TIME and use the ARCHTEST= option to test for heteroscedastic OLS residuals:

```
/*-- test for heteroscedastic OLS residuals --*/
proc autoreg data=a;
  model y = time / archtest;
  output out=r r=yresid;
run;
```

The PROC AUTOREG output is shown in Figure 8.11. The Q statistics test for changes in variance across time by using lag windows that range from 1 through 12. (See the section “Testing for Nonlinear Dependence: Heteroscedasticity Tests” on page 398 for details.) The p -values for the test statistics strongly indicate heteroscedasticity, with $p < 0.0001$ for all lag windows.

The Lagrange multiplier (LM) tests also indicate heteroscedasticity. These tests can also help determine the order of the ARCH model that is appropriate for modeling the heteroscedasticity, assuming that the changing variance follows an autoregressive conditional heteroscedasticity model.

Figure 8.11 Heteroscedasticity Tests

Heteroscedastic Time Series					
The AUTOREG Procedure					
Dependent Variable y					
Ordinary Least Squares Estimates					
SSE	223.645647	DFE	118		
MSE	1.89530	Root MSE	1.37670		
SBC	424.828766	AIC	419.253783		
MAE	0.97683599	AICC	419.356347		
MAPE	2.73888672	HQC	421.517809		
Durbin-Watson	2.4444	Regress R-Square	0.9938		
		Total R-Square	0.9938		
Tests for ARCH Disturbances Based on OLS Residuals					
Order	Q	Pr > Q	LM	Pr > LM	
1	19.4549	<.0001	19.1493	<.0001	
2	21.3563	<.0001	19.3057	<.0001	
3	28.7738	<.0001	25.7313	<.0001	
4	38.1132	<.0001	26.9664	<.0001	
5	52.3745	<.0001	32.5714	<.0001	
6	54.4968	<.0001	34.2375	<.0001	
7	55.3127	<.0001	34.4726	<.0001	
8	58.3809	<.0001	34.4850	<.0001	
9	68.3075	<.0001	38.7244	<.0001	
10	73.2949	<.0001	38.9814	<.0001	
11	74.9273	<.0001	39.9395	<.0001	
12	76.0254	<.0001	40.8144	<.0001	
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	9.8684	0.2529	39.02	<.0001
time	1	0.5000	0.003628	137.82	<.0001

The tests of Lee and King (1993) and Wong and Li (1995) can also be applied to check the absence of ARCH effects. The following example shows that Wong and Li's test is robust to detect the presence of ARCH effects with the existence of outliers.

```

/*-- data with outliers at obervation 10 --*/
data b;
  do time = -10 to 120;
    s = 1 + (time >= 60 & time < 90);
    u = s*rannor(12346);
    y = 10 + .5 * time + u;
    if time = 10 then
      do; y = 200; end;
    if time > 0 then output;
  end;
run;
/*-- test for heteroscedastic OLS residuals --*/
proc autoreg data=b;
  model y = time / archtest=(qlm) ;
  model y = time / archtest=(lk,wl) ;
run;

```

As shown in Figure 8.12, the p -values of Q or LM statistics for all lag windows are above 90%, which fails to reject the null hypothesis of the absence of ARCH effects. Lee and King's test, which rejects the null hypothesis for lags more than 8 at 10% significance level, works better. Wong and Li's test works best, rejecting the null hypothesis and detecting the presence of ARCH effects for all lag windows.

Figure 8.12 Heteroscedasticity Tests

Heteroscedastic Time Series				
The AUTOREG Procedure				
Tests for ARCH Disturbances Based on OLS Residuals				
Order	Q	Pr > Q	LM	Pr > LM
1	0.0076	0.9304	0.0073	0.9319
2	0.0150	0.9925	0.0143	0.9929
3	0.0229	0.9991	0.0217	0.9992
4	0.0308	0.9999	0.0290	0.9999
5	0.0367	1.0000	0.0345	1.0000
6	0.0442	1.0000	0.0413	1.0000
7	0.0522	1.0000	0.0485	1.0000
8	0.0612	1.0000	0.0565	1.0000
9	0.0701	1.0000	0.0643	1.0000
10	0.0701	1.0000	0.0742	1.0000
11	0.0701	1.0000	0.0838	1.0000
12	0.0702	1.0000	0.0939	1.0000

Figure 8.12 continued

Tests for ARCH Disturbances Based on OLS Residuals				
Order	LK	Pr > LK	WL	Pr > WL
1	-0.6377	0.5236	34.9984	<.0001
2	-0.8926	0.3721	72.9542	<.0001
3	-1.0979	0.2723	104.0322	<.0001
4	-1.2705	0.2039	139.9328	<.0001
5	-1.3824	0.1668	176.9830	<.0001
6	-1.5125	0.1304	200.3388	<.0001
7	-1.6385	0.1013	238.4844	<.0001
8	-1.7695	0.0768	267.8882	<.0001
9	-1.8881	0.0590	304.5706	<.0001
10	-2.2349	0.0254	326.3658	<.0001
11	-2.2380	0.0252	348.8036	<.0001
12	-2.2442	0.0248	371.9596	<.0001

Heteroscedasticity and GARCH Models

There are several approaches to dealing with heteroscedasticity. If the error variance at different times is known, weighted regression is a good method. If, as is usually the case, the error variance is unknown and must be estimated from the data, you can model the changing error variance.

The *generalized autoregressive conditional heteroscedasticity* (GARCH) model is one approach to modeling time series with heteroscedastic errors. The GARCH regression model with autoregressive errors is

$$y_t = \mathbf{x}_t' \beta + v_t$$

$$v_t = \epsilon_t - \phi_1 v_{t-1} - \dots - \phi_m v_{t-m}$$

$$\epsilon_t = \sqrt{h_t} e_t$$

$$h_t = \omega + \sum_{i=1}^q \alpha_i \epsilon_{t-i}^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

$$e_t \sim \text{IN}(0, 1)$$

This model combines the m th-order autoregressive error model with the GARCH(p, q) variance model. It is denoted as the AR(m)-GARCH(p, q) regression model.

The tests for the presence of ARCH effects (namely, Q and LM tests, tests from Lee and King (1993) and tests from Wong and Li (1995)) can help determine the order of the ARCH model appropriate for the data. For example, the Lagrange multiplier (LM) tests shown in Figure 8.11 are significant ($p < 0.0001$) through order 12, which indicates that a very high-order ARCH model is needed to model the heteroscedasticity.

The basic ARCH(q) model ($p = 0$) is a *short memory* process in that only the most recent q squared residuals are used to estimate the changing variance. The GARCH model ($p > 0$) allows *long memory* processes, which use all the past squared residuals to estimate the current variance. The LM tests in Figure 8.11 suggest the use of the GARCH model ($p > 0$) instead of the ARCH model.

The GARCH(p, q) model is specified with the GARCH=($P=p, Q=q$) option in the MODEL statement. The basic ARCH(q) model is the same as the GARCH(0, q) model and is specified with the GARCH=($Q=q$) option.

The following statements fit an AR(2)-GARCH(1, 1) model for the Y series that is regressed on TIME. The GARCH=($P=1, Q=1$) option specifies the GARCH(1, 1) conditional variance model. The NLAG=2 option specifies the AR(2) error process. Only the maximum likelihood method is supported for GARCH models; therefore, the METHOD= option is not needed. The CEV= option in the OUTPUT statement stores the estimated conditional error variance at each time period in the variable VHAT in an output data set named OUT. The data set is the same as in the section “Testing for Heteroscedasticity” on page 330.

```
data c;
  ul=0; ull=0;
  do time = -10 to 120;
    s = 1 + (time >= 60 & time < 90);
    u = + 1.3 * ul - .5 * ull + s*rannor(12346);
    y = 10 + .5 * time + u;
    if time > 0 then output;
    ull = ul; ul = u;
  end;
run;
title 'AR(2)-GARCH(1,1) model for the Y series regressed on TIME';
proc autoreg data=c;
  model y = time / nlag=2 garch=(q=1,p=1) maxit=50;
  output out=out cev=vhat;
run;
```

The results for the GARCH model are shown in Figure 8.13. (The preliminary estimates are not shown.)

Figure 8.13 AR(2)-GARCH(1, 1) Model

AR(2)-GARCH(1,1) model for the Y series regressed on TIME			
The AUTOREG Procedure			
GARCH Estimates			
SSE	218.861036	Observations	120
MSE	1.82384	Uncond Var	1.6299733
Log Likelihood	-187.44013	Total R-Square	0.9941
SBC	408.392693	AIC	388.88025
MAE	0.97051406	AICC	389.88025
MAPE	2.75945337	HQC	396.804343
		Normality Test	0.0838
		Pr > ChiSq	0.9590

Figure 8.13 continued

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	8.9301	0.7456	11.98	<.0001
time	1	0.5075	0.0111	45.90	<.0001
AR1	1	-1.2301	0.1111	-11.07	<.0001
AR2	1	0.5023	0.1090	4.61	<.0001
ARCH0	1	0.0850	0.0780	1.09	0.2758
ARCH1	1	0.2103	0.0873	2.41	0.0159
GARCH1	1	0.7375	0.0989	7.46	<.0001

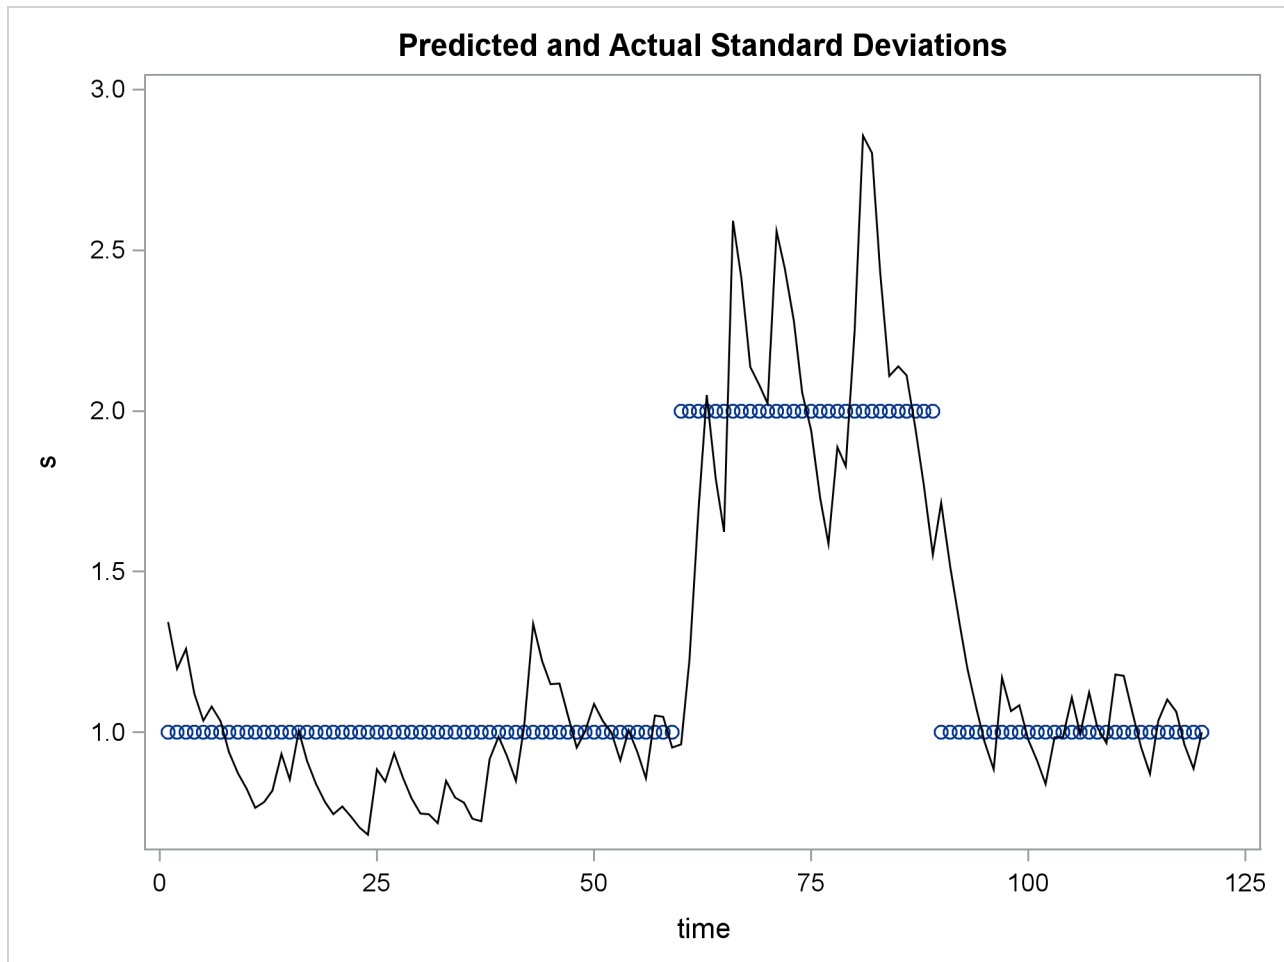
The normality test is not significant ($p = 0.959$), which is consistent with the hypothesis that the residuals from the GARCH model, $\epsilon_t/\sqrt{h_t}$, are normally distributed. The parameter estimates table includes rows for the GARCH parameters. ARCH0 represents the estimate for the parameter ω , ARCH1 represents α_1 , and GARCH1 represents γ_1 .

The following statements transform the estimated conditional error variance series VHAT to the estimated standard deviation series SHAT. Then, they plot SHAT together with the true standard deviation S used to generate the simulated data.

```
data out;
  set out;
  shat = sqrt( vhat );
run;

title 'Predicted and Actual Standard Deviations';
proc sgplot data=out noautolegend;
  scatter x=time y=s;
  series x=time y=shat/ lineattrs=(color=black);
run;
```

The plot is shown in Figure 8.14.

Figure 8.14 Estimated and Actual Error Standard Deviation Series

In this example note that the form of heteroscedasticity used in generating the simulated series Y does not fit the GARCH model. The GARCH model assumes *conditional* heteroscedasticity, with homoscedastic unconditional error variance. That is, the GARCH model assumes that the changes in variance are a function of the realizations of preceding errors and that these changes represent temporary and random departures from a constant unconditional variance. The data-generating process used to simulate series Y , contrary to the GARCH model, has exogenous unconditional heteroscedasticity that is independent of past errors.

Nonetheless, as shown in [Figure 8.14](#), the GARCH model does a reasonably good job of approximating the error variance in this example, and some improvement in the efficiency of the estimator of the regression parameters can be expected.

The GARCH model might perform better in cases where theory suggests that the data-generating process produces true autoregressive conditional heteroscedasticity. This is the case in some economic theories of asset returns, and GARCH-type models are often used for analysis of financial market data.

GARCH Models

The AUTOREG procedure supports several variations of GARCH models.

Using the TYPE= option along with the GARCH= option enables you to control the constraints placed on the estimated GARCH parameters. You can specify unconstrained, nonnegativity-constrained (default), stationarity-constrained, or integration-constrained models. The integration constraint produces the integrated GARCH (IGARCH) model.

You can also use the TYPE= option to specify the exponential form of the GARCH model, called the EGARCH model, or other types of GARCH models, namely the quadratic GARCH (QGARCH), threshold GARCH (TGARCH), and power GARCH (PGARCH) models. The MEAN= option along with the GARCH= option specifies the GARCH-in-mean (GARCH-M) model.

The following statements illustrate the use of the TYPE= option to fit an AR(2)-EGARCH(1, 1) model to the series Y. (Output is not shown.)

```
/*-- AR(2)-EGARCH(1,1) model --*/
proc autoreg data=a;
  model y = time / nlag=2 garch=(p=1,q=1,type=exp);
run;
```

See the section “GARCH Models” on page 370 for details.

Syntax: AUTOREG Procedure

The AUTOREG procedure is controlled by the following statements:

```
PROC AUTOREG options ;
  BY variables ;
  CLASS variables ;
  MODEL dependent = regressors / options ;
  HETERO variables / options ;
  NLOPTIONS options ;
  OUTPUT < OUT=SAS-data-set > < options > < keyword=name > ;
  RESTRICT equation , ... , equation ;
  TEST equation , ... , equation / option ;
```

At least one MODEL statement must be specified. One OUTPUT statement can follow each MODEL statement. One HETERO statement can follow each MODEL statement.

Functional Summary

The statements and options used with the AUTOREG procedure are summarized in the following table.

Table 8.1 AUTOREG Functional Summary

Description	Statement	Option
Data Set Options		
Specify the input data set	AUTOREG	DATA=
Write parameter estimates to an output data set	AUTOREG	OUTEST=
Include covariances in the OUTEST= data set	AUTOREG	COVOUT
Requests that the procedure produce graphics via the Output Delivery System	AUTOREG	PLOTS=
Write predictions, residuals, and confidence limits to an output data set	OUTPUT	OUT=
Declaring the Role of Variables		
Specify BY-group processing	BY	
Specify classification variables	CLASS	
Printing Control Options		
Request all printing options	MODEL	ALL
Print transformed coefficients	MODEL	COEF
Print correlation matrix of the estimates	MODEL	CORRB
Print covariance matrix of the estimates	MODEL	COVB
Print DW statistics up to order j	MODEL	DW= j
Print marginal probability of the generalized Durbin-Watson test statistics for large sample sizes	MODEL	DWPROB
Print the p -values for the Durbin-Watson test be computed using a linearized approximation of the design matrix	MODEL	LDW
Print inverse of Toeplitz matrix	MODEL	GINV
Print the Godfrey LM serial correlation test	MODEL	GODFREY=
Print details at each iteration step	MODEL	ITPRINT
Print the Durbin t statistic	MODEL	LAGDEP
Print the Durbin h statistic	MODEL	LAGDEP=
Print the log-likelihood value of the regression model	MODEL	LOGLIKL
Print the Jarque-Bera normality test	MODEL	NORMAL
Print the tests for the absence of ARCH effects	MODEL	ARCHTEST=
Print BDS tests for independence	MODEL	BDS=
Print rank version of von Neumann ratio test for independence	MODEL	VNRRANK=
Print runs test for independence	MODEL	RUNS=

Table 8.1 *continued*

Description	Statement	Option
Print the turning point test for independence	MODEL	TP=
Print the Lagrange multiplier test	HETERO	TEST=LM
Print the Chow test	MODEL	CHOW=
Print the predictive Chow test	MODEL	PCHOW=
Suppress printed output	MODEL	NOPRINT
Print partial autocorrelations	MODEL	PARTIAL
Print Ramsey's RESET test	MODEL	RESET
Print Phillips-Perron tests for stationarity or unit roots	MODEL	STATIONARITY=(PHILLIPS=)
Print Augmented Dickey-Fuller tests for stationarity or unit roots	MODEL	STATIONARITY=(ADF=)
Print ERS tests for stationarity or unit roots	MODEL	STATIONARITY=(ERS=)
Print Ng-Perron tests for stationarity or unit roots	MODEL	STATIONARITY=(NP=)
Print KPSS tests for stationarity or unit roots	MODEL	STATIONARITY=(KPSS=)
Print tests of linear hypotheses	TEST	
Specify the test statistics to use	TEST	TYPE=
Print the uncentered regression R^2	MODEL	URSQ
Options to Control the Optimization Process		
Specify the optimization options	NLOPTIONS	see Chapter 6, "Nonlinear Optimization Methods,"
Model Estimation Options		
Specify the order of autoregressive process	MODEL	NLAG=
Center the dependent variable	MODEL	CENTER
Suppress the intercept parameter	MODEL	NOINT
Remove nonsignificant AR parameters	MODEL	BACKSTEP
Specify significance level for BACKSTEP	MODEL	SLSTAY=
Specify the convergence criterion	MODEL	CONVERGE=
Specify the type of covariance matrix	MODEL	COVEST=
Set the initial values of parameters used by the iterative optimization algorithm	MODEL	INITIAL=
Specify iterative Yule-Walker method	MODEL	ITER
Specify maximum number of iterations	MODEL	MAXITER=
Specify the estimation method	MODEL	METHOD=
Use only first sequence of nonmissing data	MODEL	NOMISS
Specify the optimization technique	MODEL	OPTMETHOD=
Imposes restrictions on the regression estimates	RESTRICT	
Estimate and test heteroscedasticity models	HETERO	

Table 8.1 *continued*

Description	Statement	Option
GARCH Related Options		
Specify order of GARCH process	MODEL	GARCH=(Q,P=)
Specify type of GARCH model	MODEL	GARCH=(...,TYPE=)
Specify various forms of the GARCH-M model	MODEL	GARCH=(...,MEAN=)
Suppress GARCH intercept parameter	MODEL	GARCH=(...,NOINT)
Specify the trust region method	MODEL	GARCH=(...,TR)
Estimate the GARCH model for the conditional t distribution	MODEL	GARCH=(...) DIST=
Estimate the start-up values for the conditional variance equation	MODEL	GARCH=(...,STARTUP=)
Specify the functional form of the heteroscedasticity model	HETERO	LINK=
Specify that the heteroscedasticity model does not include the unit term	HETERO	NOCONST
Impose constraints on the estimated parameters in the heteroscedasticity model	HETERO	COEF=
Impose constraints on the estimated standard deviation of the heteroscedasticity model	HETERO	STD=
Output conditional error variance	OUTPUT	CEV=
Output conditional prediction error variance	OUTPUT	CPEV=
Specify the flexible conditional variance form of the GARCH model	HETERO	
Output Control Options		
Specify confidence limit size	OUTPUT	ALPHACLI=
Specify confidence limit size for structural predicted values	OUTPUT	ALPHACLM=
Specify the significance level for the upper and lower bounds of the CUSUM and CUSUMSQ statistics	OUTPUT	ALPHACSM=
Specify the name of a variable to contain the values of the Theil's BLUS residuals	OUTPUT	BLUS=
Output the value of the error variance σ_t^2	OUTPUT	CEV=
Output transformed intercept variable	OUTPUT	CONSTANT=
Specify the name of a variable to contain the CUSUM statistics	OUTPUT	CUSUM=
Specify the name of a variable to contain the CUSUMSQ statistics	OUTPUT	CUSUMSQ=
Specify the name of a variable to contain the upper confidence bound for the CUSUM statistic	OUTPUT	CUSUMUB=
Specify the name of a variable to contain the lower confidence bound for the CUSUM statistic	OUTPUT	CUSUMLB=

Table 8.1 *continued*

Description	Statement	Option
Specify the name of a variable to contain the upper confidence bound for the CUSUMSQ statistic	OUTPUT	CUSUMSQUB=
Specify the name of a variable to contain the lower confidence bound for the CUSUMSQ statistic	OUTPUT	CUSUMSQLB=
Output lower confidence limit	OUTPUT	LCL=
Output lower confidence limit for structural predicted values	OUTPUT	LCLM=
Output predicted values	OUTPUT	P=
Output predicted values of structural part	OUTPUT	PM=
Output residuals	OUTPUT	R=
Output residuals from structural predictions	OUTPUT	RM=
Specify the name of a variable to contain the part of the predictive error variance (v_t)	OUTPUT	RECPEV=
Specify the name of a variable to contain recursive residuals	OUTPUT	RECRES=
Output transformed variables	OUTPUT	TRANSFORM=
Output upper confidence limit	OUTPUT	UCL=
Output upper confidence limit for structural predicted values	OUTPUT	UCLM=

PROC AUTOREG Statement

PROC AUTOREG *options* ;

The following options can be used in the PROC AUTOREG statement:

DATA=SAS-data-set

specifies the input SAS data set. If the DATA= option is not specified, PROC AUTOREG uses the most recently created SAS data set.

OUTEST=SAS-data-set

writes the parameter estimates to an output data set. See the section “OUTEST= Data Set” on page 405 for information on the contents of these data set.

COVOUT

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

PLOTS<(global-plot-options)> <= (specific plot options)>

requests that the AUTOREG procedure produce statistical graphics via the Output Delivery System, provided that the ODS GRAPHICS statement has been specified. For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*). The *global-plot-options* apply to all relevant plots generated by the AUTOREG procedure. The *global-plot-options* supported by the AUTOREG procedure follow.

Global Plot Options

ONLY suppresses the default plots. Only the plots specifically requested are produced.

UNPACKPANEL | UNPACK breaks a graphic that is otherwise paneled into individual component plots.

Specific Plot Options

ALL requests that all plots appropriate for the particular analysis be produced.

ACF produces the autocorrelation function plot.

IACF produces the inverse autocorrelation function plot of residuals.

PACF produces the partial autocorrelation function plot of residuals.

FITPLOT plots the predicted and actual values.

COOKSD produces the Cook’s *D* plot.

QQ Q-Q plot of residuals.

RESIDUAL | RES plots the residuals.

STUDENTRESIDUAL plots the studentized residuals. For the models with the **NLAG=** or **GARCH=** options in the **MODEL** statement or with the **HETERO** statement, this option is replaced by the **STANDARDRESIDUAL** option.

STANDARDRESIDUAL plots the standardized residuals.

WHITENOISE plots the white noise probabilities.

RESIDUALHISTOGRAM | RESIDHISTOGRAM plots the histogram of residuals.

NONE suppresses all plots.

In addition, any of the following **MODEL** statement options can be specified in the **PROC AUTOREG** statement, which is equivalent to specifying the option for every **MODEL** statement: **ALL**, **ARCHTEST**, **BACKSTEP**, **CENTER**, **COEF**, **CONVERGE=**, **CORRB**, **COVB**, **DW=**, **DWPROB**, **GINV**, **ITER**, **ITPRINT**, **MAXITER=**, **METHOD=**, **NOINT**, **NOMISS**, **NOPRINT**, and **PARTIAL**.

BY Statement

BY *variables* ;

A BY statement can be used with PROC AUTOREG to obtain separate analyses on observations in groups defined by the BY variables.

CLASS Statement (Experimental)

CLASS *variables* ;

The CLASS statement names the classification variables to be used in the analysis. Classification variables can be either character or numeric.

In PROC AUTOREG, the CLASS statement enables you to output class variables to a data set that contains a copy of the original data.

Class levels are determined from the formatted values of the CLASS variables. Thus, you can use formats to group values into levels. See the discussion of the FORMAT procedure in *SAS Language Reference: Dictionary* for details.

MODEL Statement

MODEL *dependent = regressors / options* ;

The MODEL statement specifies the dependent variable and independent regressor variables for the regression model. If no independent variables are specified in the MODEL statement, only the mean is fitted. (This is a way to obtain autocorrelations of a series.)

Models can be given labels of up to eight characters. Model labels are used in the printed output to identify the results for different models. The model label is specified as follows:

label : **MODEL** ... ;

The following options can be used in the MODEL statement after a slash (/).

CENTER

centers the dependent variable by subtracting its mean and suppresses the intercept parameter from the model. This option is valid only when the model does not have regressors (explanatory variables).

NOINT

suppresses the intercept parameter.

Autoregressive Error Options

NLAG=*number*

NLAG=(*number-list*)

specifies the order of the autoregressive error process or the subset of autoregressive error lags to be fitted. Note that NLAG=3 is the same as NLAG=(1 2 3). If the NLAG= option is not specified, PROC AUTOREG does not fit an autoregressive model.

GARCH Estimation Options

DIST=*value*

specifies the distribution assumed for the error term in GARCH-type estimation. If no GARCH= option is specified, the option is ignored. If EGARCH is specified, the distribution is always the normal distribution. The values of the DIST= option are as follows:

T specifies Student's *t* distribution.

NORMAL specifies the standard normal distribution. The default is DIST=NORMAL.

GARCH=(*option-list*)

specifies a GARCH-type conditional heteroscedasticity model. The GARCH= option in the MODEL statement specifies the family of ARCH models to be estimated. The GARCH(1, 1) regression model is specified in the following statement:

```
model y = x1 x2 / garch=(q=1,p=1);
```

When you want to estimate the subset of ARCH terms, such as ARCH(1, 3), you can write the SAS statement as follows:

```
model y = x1 x2 / garch=(q=(1 3));
```

With the TYPE= option, you can specify various GARCH models. The IGARCH(2, 1) model without trend in variance is estimated as follows:

```
model y = / garch=(q=2,p=1,type=integ,noint);
```

The following options can be used in the GARCH=() option. The options are listed within parentheses and separated by commas.

Q=*number*

Q=(*number-list*)

specifies the order of the process or the subset of ARCH terms to be fitted.

P=*number*

P=(*number-list*)

specifies the order of the process or the subset of GARCH terms to be fitted. If only the P= option is specified, P= option is ignored and Q=1 is assumed.

TYPE=*value*

specifies the type of GARCH model. The values of the TYPE= option are as follows:

- EXP | EGARCH specifies the exponential GARCH or EGARCH model.
- INTEGRATED | IGARCH specifies the integrated GARCH or IGARCH model.
- NELSON | NELSONCAO specifies the Nelson-Cao inequality constraints.
- NONNEG specifies the GARCH model with nonnegativity constraints.
- POWER | PGARCH specifies the power GARCH or PGARCH model.
- QUADR | QUADRATIC | QGARCH specifies the quadratic GARCH or QGARCH model.
- STATIONARY constrains the sum of GARCH coefficients to be less than 1.
- THRES | THRESHOLD | TGARCH specifies the threshold GARCH or TGARCH model.

The default is TYPE=NELSON.

MEAN=*value*

specifies the functional form of the GARCH-M model. The values of the MEAN= option are as follows:

- LINEAR specifies the linear function:

$$y_t = \mathbf{x}_t' \beta + \delta h_t + \epsilon_t$$

- LOG specifies the log function:

$$y_t = \mathbf{x}_t' \beta + \delta \ln(h_t) + \epsilon_t$$

- SQRT specifies the square root function:

$$y_t = \mathbf{x}_t' \beta + \delta \sqrt{h_t} + \epsilon_t$$

NOINT

suppresses the intercept parameter in the conditional variance model. This option is valid only with the TYPE=INTEG option.

STARTUP=MSE | ESTIMATE

requests that the positive constant c for the start-up values of the GARCH conditional error variance process be estimated. By default or if STARTUP=MSE is specified, the value of the mean squared error is used as the default constant.

TR

uses the trust region method for GARCH estimation. This algorithm is numerically stable, though computation is expensive. The double quasi-Newton method is the default.

Printing Options

ALL

requests all printing options.

ARCHTEST

ARCHTEST=(*option-list*)

specifies tests for the absence of ARCH effects. The following options can be used in the ARCHTEST=() option. The options are listed within parentheses and separated by commas.

QLM | QLMARCH

requests the Q and Engle's LM tests.

LK | LKARCH

requests Lee and King's ARCH tests.

WL | WLARCH

requests Wong and Li's ARCH tests.

ALL

requests all ARCH tests, namely Q and Engle's LM tests, Lee and King's tests, and Wong and Li's tests.

If ARCHTEST is defined without additional suboptions, it requests the Q and Engle's LM tests. That is, the statement

```
model return = x1 x2 / archtest;
```

is equivalent to the statement

```
model return = x1 x2 / archtest=(qlm);
```

The following statement requests Lee and King's tests and Wong and Li's tests:

```
model return = / archtest=(lk,wl);
```

BDS

BDS=(*option-list*)

specifies Brock-Dechert-Scheinkman (BDS) tests for independence. The following options can be used in the BDS=() option. The options are listed within parentheses and separated by commas.

M=number

specifies the maximum number of the embedding dimension. The BDS tests with embedding dimension from 2 to M are calculated. M must be an integer between 2 and 20. The default value of the M= suboption is 20.

D=number

specifies the parameter to determine the radius for BDS test. The BDS test sets up the radius as $r = D * \sigma$, where σ is the standard deviation of the time series to be tested. By default, D=1.5.

PVALUE=DIST | SIM

specifies the way to calculate the p -values. By default or if PVALUE=DIST is specified, the p -values are calculated according to the asymptotic distribution of BDS statistics (that is, the standard normal distribution). Otherwise, for samples of size less than 500, the p -values are obtained through Monte Carlo simulation.

Z=value

specifies the type of the time series (residuals) to be tested. The values of the Z= suboption are as follows:

Y	specifies the regressand. The default is Z=Y.
RO	specifies the OLS residuals.
R	specifies the residuals of the final model.
RM	specifies the structural residuals of the final model.
SR	specifies the standardized residuals of the final model, defined by residuals over the square root of the conditional variance.

If BDS is defined without additional suboptions, all suboptions are set as default values. That is, the statement

```
model return = x1 x2 / nlag=1 BDS;
```

is equivalent to the statement

```
model return = x1 x2 / nlag=1 BDS=(M=20, D=1.5, PVALUE=DIST, Z=Y);
```

To do the specification check of a GARCH(1,1) model, you can write the SAS statement as follows:

```
model return = / garch=(p=1,q=1) BDS=(Z=SR);
```

CHOW=(obs₁ ... obs_n)

computes Chow tests to evaluate the stability of the regression coefficient. The Chow test is also called the analysis-of-variance test.

Each value obs_i listed on the CHOW= option specifies a break point of the sample. The sample is divided into parts at the specified break point, with observations before obs_i in the first part and obs_i and later observations in the second part, and the fits of the model in the two parts are compared to whether both parts of the sample are consistent with the same model.

The break points obs_i refer to observations within the time range of the dependent variable, ignoring missing values before the start of the dependent series. Thus, CHOW=20 specifies the 20th observation after the first nonmissing observation for the dependent variable. For example, if the dependent variable Y contains 10 missing values before the first observation with a nonmissing Y value, then CHOW=20 actually refers to the 30th observation in the data set.

When you specify the break point, you should note the number of presample missing values.

COEF

prints the transformation coefficients for the first p observations. These coefficients are formed from a scalar multiplied by the inverse of the Cholesky root of the Toeplitz matrix of autocovariances.

CORRB

prints the estimated correlations of the parameter estimates.

COVB

prints the estimated covariances of the parameter estimates.

COVEST=OP | HESSIAN | QML | HC0 | HC1 | HC2 | HC3 | HC4

specifies the type of covariance matrix. When COVEST=OP is specified, the outer product matrix is used to compute the covariance matrix of the parameter estimates. The COVEST=HESSIAN option produces the covariance matrix by using the Hessian matrix. The quasi-maximum likelihood estimates are computed with COVEST=QML, which is equivalent to COVEST=HC0. When the final model is an OLS or AR error model, COVEST=OP, HESSIAN, or QML, is ignored, and the method to calculate the estimate of covariance matrix is illustrated in the section “[Variance Estimates and Standard Errors](#)” on page 368. When COVEST=HC n , where $n = 0, 1, 2, 3, 4$ is specified, the corresponding heteroscedasticity consistent covariance matrix estimator (HCCME) is calculated. See the section “[Heteroscedasticity Consistent Covariance Matrix Estimator](#)” on page 376 for more details. The default is COVEST=OP.

DW= n

prints Durbin-Watson statistics up to the order n . The default is DW=1. When the LAGDEP option is specified, the Durbin-Watson statistic is not printed unless the DW= option is explicitly specified.

DWPROB

now produces p -values for the generalized Durbin-Watson test statistics for large sample sizes. Previously, the Durbin-Watson probabilities were calculated only for small sample sizes. The new method of calculating Durbin-Watson probabilities is based on the algorithm of Ansley, Kohn, and Shively (1992).

GINV

prints the inverse of the Toeplitz matrix of autocovariances for the Yule-Walker solution. See the section “[Computational Methods](#)” on page 367 later in this chapter for details.

GODFREY**GODFREY= r**

produces Godfrey’s general Lagrange multiplier test against ARMA errors.

ITPRINT

prints the objective function and parameter estimates at each iteration. The objective function is the full log likelihood function for the maximum likelihood method, while the error sum of squares is produced as the objective function of unconditional least squares. For the ML method, the ITPRINT option prints the value of the full log likelihood function, not the concentrated likelihood.

LAGDEP**LAGDV**

prints the Durbin t statistic, which is used to detect residual autocorrelation in the presence of lagged dependent variables. See the section “[Generalized Durbin-Watson Tests](#)” on page 394 for details.

LAGDEP=name**LAGDV=name**

prints the Durbin h statistic for testing the presence of first-order autocorrelation when regressors contain the lagged dependent variable whose name is specified as **LAGDEP=name**. If the Durbin h statistic cannot be computed, the asymptotically equivalent t statistic is printed instead. See the section “[Generalized Durbin-Watson Tests](#)” on page 394 for details.

When the regression model contains several lags of the dependent variable, specify the lagged dependent variable for the smallest lag in the **LAGDEP=** option. For example:

```
model y = x1 x2 ylag2 ylag3 / lagdep=ylag2;
```

LOGLIKL

prints the log likelihood value of the regression model, assuming normally distributed errors.

NOPRINT

suppresses all printed output.

NORMAL

specifies the Jarque-Bera’s normality test statistic for regression residuals.

PARTIAL

prints partial autocorrelations.

PCHOW=(obs₁ ... obs_n)

computes the predictive Chow test. The form of the **PCHOW=** option is the same as the **CHOW=** option; see the discussion of the **CHOW=** option earlier in this chapter.

RESET

produces Ramsey’s RESET test statistics. The **RESET** option tests the null model

$$y_t = \mathbf{x}_t \beta + u_t$$

against the alternative

$$y_t = \mathbf{x}_t \beta + \sum_{j=2}^p \phi_j \hat{y}_t^j + u_t$$

where \hat{y}_t is the predicted value from the OLS estimation of the null model. The **RESET** option produces three RESET test statistics for $p = 2, 3$, and 4.

RUNS**RUNS=**(*Z=value*)

specifies the runs test for independence. The *Z=* suboption specifies the type of the time series or residuals to be tested. The values of the *Z=* suboption are as follows:

Y	specifies the regressand. The default is <i>Z=Y</i> .
RO	specifies the OLS residuals.
R	specifies the residuals of the final model.
RM	specifies the structural residuals of the final model.
SR	specifies the standardized residuals of the final model, defined by residuals over the square root of the conditional variance.

STATIONARITY=(**ADF**)**STATIONARITY=**(**ADF=**(*value ... value*))**STATIONARITY=**(**KPSS**)**STATIONARITY=**(**KPSS=**(**KERNEL=***type*))**STATIONARITY=**(**KPSS=**(**KERNEL=***type* **TRUNCPOINTMETHOD**))**STATIONARITY=**(**PHILLIPS**)**STATIONARITY=**(**PHILLIPS=**(*value ... value*))**STATIONARITY=**(**ERS**)**STATIONARITY=**(**ERS=**(*value*))**STATIONARITY=**(**NP**)**STATIONARITY=**(**NP=**(*value*))*Experimental***STATIONARITY=**(**ADF**<=(...)>, **ERS**<=(...)>, **KPSS**<=(...)>, **NP**<=(...)>, **PHILLIPS**<=(...)>)

specifies tests of stationarity or unit roots. The **STATIONARITY=** option provides Phillips-Perron, Phillips-Ouliaris, augmented Dickey-Fuller, Engle-Granger, KPSS, ERS, and NP tests.

The **PHILLIPS** or **PHILLIPS=** suboption of the **STATIONARITY=** option produces the Phillips-Perron unit root test when there are no regressors in the **MODEL** statement. When the model includes regressors, the **PHILLIPS** option produces the Phillips-Ouliaris cointegration test. The **PHILLIPS** option can be abbreviated as **PP**.

The **PHILLIPS** option performs the Phillips-Perron test for three null hypothesis cases: zero mean, single mean, and deterministic trend. For each case, the **PHILLIPS** option computes two test statistics, \hat{Z}_ρ and \hat{Z}_t (in the original paper they are referred to as \hat{Z}_α and \hat{Z}_t), and reports their *p*-values. These test statistics have the same limiting distributions as the corresponding Dickey-Fuller tests.

The three types of the Phillips-Perron unit root test reported by the **PHILLIPS** option are as follows:

Zero mean computes the Phillips-Perron test statistic based on the zero mean autoregressive model:

$$y_t = \rho y_{t-1} + u_t$$

Single mean computes the Phillips-Perron test statistic based on the autoregressive model with a constant term:

$$y_t = \mu + \rho y_{t-1} + u_t$$

Trend computes the Phillips-Perron test statistic based on the autoregressive model with constant and time trend terms:

$$y_t = \mu + \rho y_{t-1} + \delta t + u_t$$

You can specify several truncation points l for weighted variance estimators by using the PHILLIPS=($l_1 \dots l_n$) specification. The statistic for each truncation point l is computed as

$$\sigma_{Tl}^2 = \frac{1}{T} \sum_{i=1}^T \hat{u}_i^2 + \frac{2}{T} \sum_{s=1}^l w_{sl} \sum_{t=s+1}^T \hat{u}_t \hat{u}_{t-s}$$

where $w_{sl} = 1 - s/(l + 1)$ and \hat{u}_t are OLS residuals. If you specify the PHILLIPS option without specifying truncation points, the default truncation point is $\max(1, \sqrt{T}/5)$, where T is the number of observations.

The Phillips-Perron test can be used in general time series models since its limiting distribution is derived in the context of a class of weakly dependent and heterogeneously distributed data. The marginal probability for the Phillips-Perron test is computed assuming that error disturbances are normally distributed.

When there are regressors in the MODEL statement, the PHILLIPS option computes the Phillips-Ouliaris cointegration test statistic by using the least squares residuals. The normalized cointegrating vector is estimated using OLS regression. Therefore, the cointegrating vector estimates might vary with the regressand (normalized element) unless the regression R-square is 1.

The marginal probabilities for cointegration testing are not produced. You can refer to Phillips and Ouliaris (1990) tables Ia–Ic for the \hat{Z}_α test and tables IIa–IIc for the \hat{Z}_t test. The standard residual-based cointegration test can be obtained using the NOINT option in the MODEL statement, while the demeaned test is computed by including the intercept term. To obtain the demeaned and detrended cointegration tests, you should include the time trend variable in the regressors. Refer to Phillips and Ouliaris (1990) or Hamilton (1994, Tbl. 19.1) for information about the Phillips-Ouliaris cointegration test. Note that Hamilton (1994, Tbl. 19.1) uses Z_ρ and Z_t instead of the original Phillips and Ouliaris (1990) notation. We adopt the notation introduced in Hamilton. To distinguish from Student's t distribution, these two statistics are named accordingly as ρ (rho) and τ (tau).

The ADF or ADF= suboption produces the augmented Dickey-Fuller unit root test (Dickey and Fuller 1979). As in the Phillips-Perron test, three regression models can be specified for the null hypothesis for the augmented Dickey-Fuller test (zero mean, single mean, and trend). These models assume that the disturbances are distributed as white noise. The augmented Dickey-Fuller test can account for the serial correlation between the disturbances in some way. The model, with the time trend specification for example, is

$$y_t = \mu + \rho y_{t-1} + \delta t + \gamma_1 \Delta y_{t-p} + \dots + \gamma_p \Delta y_{t-p} + u_t$$

This formulation has the advantage that it can accommodate higher-order autoregressive processes in u_t . The test statistic follows the same distribution as the Dickey-Fuller test statistic. For more information, see the section “[PROBDF Function for Dickey-Fuller Tests](#)” on page 162.

In the presence of regressors, the ADF option tests the cointegration relation between the dependent variable and the regressors. Following Engle and Granger (1987), a two-step estimation and testing procedure is carried out, in a fashion similar to the Phillips-Ouliaris test. The OLS residuals of the regression in the MODEL statement are used to compute the t statistic of the augmented Dickey-Fuller regression in a second step. Three cases arise based on which type of deterministic terms are included in the first step of regression. Only the constant term and linear trend cases are practically useful (Davidson and MacKinnon 1993, page 721), and therefore are computed and reported. The test statistic, as shown in Phillips and Ouliaris (1990), follows the same distribution as the \hat{Z}_t statistic in the Phillips-Ouliaris cointegration test. The asymptotic distribution is tabulated in tables IIa–IIc of Phillips and Ouliaris (1990), and the finite sample distribution is obtained in Table 2 and Table 3 in Engle and Yoo (1987) by Monte Carlo simulation.

The experimental ERS or ERS= suboption and NP or NP= suboption provide a class of *efficient unit root tests*, in the sense that they reduce the size distortion and improve the power compared with traditional unit root tests such as augmented Dickey-Fuller and Phillips-Perron tests. Two test statistics are provided by the ERS test: the point optimal test and the DF-GLS test, which are originally proposed in Elliott, Rothenberg, and Stock (1996). Four different tests, discussed in Ng and Perron (2001), are reported by NP test. These four tests include the two in the ERS test and two other tests, the modified PP test and the modified point optimal test, discussed in Ng and Perron (2001). The authors suggest using the modified AIC to select the optimal lag length in the augmented Dickey-Fuller type regression. The maximum lag length can be provided by using the NP= suboption. The default maximum lag length is 8.

The KPSS, KPSS=(KERNEL=TYPE), or KPSS=(KERNEL=TYPE TRUNCPOINTMETHOD) specifications of the STATIONARITY= option produce the Kwiatkowski, Phillips, Schmidt, and Shin (1992) (KPSS) unit root test.

Unlike the null hypothesis of the Dickey-Fuller and Phillips-Perron tests, the null hypothesis of the KPSS states that the time series is stationary. As a result, it tends to reject a random walk more often. If the model does not have an intercept, the KPSS option performs the KPSS test for three null hypothesis cases: zero mean, single mean, and deterministic trend. Otherwise, it reports the single mean and deterministic trend only. It computes a test statistic and provides tabulated critical values (see Hobijn, Franses, and Ooms (2004)) for the hypothesis that the random walk component of the time series is equal to zero in the following cases (for details, see “[Kwiatkowski, Phillips, Schmidt, and Shin \(KPSS\) Unit Root Test](#)” on page 389):

Zero mean computes the KPSS test statistic based on the zero mean autoregressive model. The p -value reported is used from Hobijn, Franses, and Ooms (2004).

$$y_t = u_t$$

Single mean computes the KPSS test statistic based on the autoregressive model with a constant term. The p -value reported is used from Kwiatkowski et al. (1992).

$$y_t = \mu + u_t$$

Trend computes the KPSS test statistic based on the autoregressive model with constant and time trend terms. The p -value reported is from Kwiatkowski et al. (1992).

$$y_t = \mu + \delta t + u_t$$

This test depends on the long-run variance of the series being defined as

$$\sigma_{Tl}^2 = \frac{1}{T} \sum_{i=1}^T \hat{u}_i^2 + \frac{2}{T} \sum_{s=1}^l w_{sl} \sum_{t=s+1}^T \hat{u}_t \hat{u}_{t-s}$$

where w_{sl} is a kernel, s is a maximum lag (truncation point), and \hat{u}_t are OLS residuals or original data series. You can specify two types of the kernel:

KERNEL=NW | BART Newey-West (or Bartlett) kernel

$$w(s, l) = 1 - \frac{s}{l + 1}$$

KERNEL=QS Quadratic spectral kernel

$$w(s/l) = w(x) = \frac{25}{12\pi^2 x^2} \left(\frac{\sin(6\pi x/5)}{6\pi x/5} - \cos(6\pi x/5) \right)$$

You can set the truncation point s by using three different methods:

SCHW=c Schwert maximum lag formula

$$s = \max \left\{ 1, \text{floor} \left[c \left(\frac{T}{100} \right)^{1/4} \right] \right\}$$

LAG=s LAG=s manually defined number of lags.

AUTO Automatic bandwidth selection (Hobijn, Franses, and Ooms 2004) (for details, see “Kwiatkowski, Phillips, Schmidt, and Shin (KPSS) Unit Root Test” on page 389).

If STATIONARITY=KPSS is defined without additional parameters, the Newey-West kernel is used. For the Newey-West kernel the default is the Schwert truncation point method with $c = 4$. For the quadratic spectral kernel the default is AUTO.

The KPSS test can be used in general time series models since its limiting distribution is derived in the context of a class of weakly dependent and heterogeneously distributed data. The limiting probability for the KPSS test is computed assuming that error disturbances are normally distributed.

The marginal probabilities for the test are reported. They are copied from Kwiatkowski et al. (1992) and Hobijn, Franses, and Ooms (2004). When there is an intercept in the model, results for mean and trend tests statistics are provided.

Examples: To test for stationarity of a variable, y , using default KERNEL= NW and SCHW= 4, you can use the following code:

```
/*-- test for stationarity of regression residuals --*/
proc autoreg data=a;
  model y= / stationarity = (KPSS);
run;
```

To test for stationarity of a variable, y , using quadratic spectral kernel and automatic bandwidth selection, you can use:

```

/*-- test for stationarity using quadratic
      spectral kernel and automatic bandwidth selection --*/
proc autoreg data=a;
  model y= /
    stationarity = (KPSS=(KERNEL=QS AUTO));
run;

```

TP**TP=(Z=value)**

specifies the turning point test for independence. The Z= suboption specifies the type of the time series or residuals to be tested. The values of the Z= suboption are as follows:

Y	specifies the regressand. The default is Z=Y.
RO	specifies the OLS residuals.
R	specifies the residuals of the final model.
RM	specifies the structural residuals of the final model.
SR	specifies the standardized residuals of the final model, defined by residuals over the square root of the conditional variance.

URSQ

prints the uncentered regression R^2 . The uncentered regression R^2 is useful to compute Lagrange multiplier test statistics, since most LM test statistics are computed as $T * \text{URSQ}$, where T is the number of observations used in estimation.

VNRRANK**VNRRANK=(option-list)**

specifies the rank version of the von Neumann ratio test for independence. The following options can be used in the VNRRANK=() option. The options are listed within parentheses and separated by commas.

PVALUE=DIST | SIM

specifies the way to calculate the p -value. By default or if PVALUE=DIST is specified, the p -value is calculated according to the asymptotic distribution of the statistic (that is, the standard normal distribution). Otherwise, for samples of size less than 100, the p -value is obtained through Monte Carlo simulation.

Z=value

specifies the type of the time series or residuals to be tested. The values of the Z= suboption are as follows:

Y	specifies the regressand. The default is Z=Y.
RO	specifies the OLS residuals.
R	specifies the residuals of the final model.
RM	specifies the structural residuals of the final model.
SR	specifies the standardized residuals of the final model, defined by residuals over the square root of the conditional variance.

Stepwise Selection Options

BACKSTEP

removes insignificant autoregressive parameters. The parameters are removed in order of least significance. This backward elimination is done only once on the Yule-Walker estimates computed after the initial ordinary least squares estimation. The BACKSTEP option can be used with all estimation methods since the initial parameter values for other estimation methods are estimated using the Yule-Walker method.

SLSTAY=*value*

specifies the significance level criterion to be used by the BACKSTEP option. The default is SLSTAY=.05.

Estimation Control Options

CONVERGE=*value*

specifies the convergence criterion. If the maximum absolute value of the change in the autoregressive parameter estimates between iterations is less than this amount, then convergence is assumed. The default is CONVERGE=.001.

If the GARCH= option and/or the HETERO statement is specified, convergence is assumed when the absolute maximum gradient is smaller than the value specified by the CONVERGE= option or when the relative gradient is smaller than 1E-8. By default, CONVERGE=1E-5.

INITIAL=(*initial-values*)

START=(*initial-values*)

specifies initial values for some or all of the parameter estimates. The values specified are assigned to model parameters in the same order as the parameter estimates are printed in the AUTOREG procedure output. The order of values in the INITIAL= or START= option is as follows: the intercept, the regressor coefficients, the autoregressive parameters, the ARCH parameters, the GARCH parameters, the inverted degrees of freedom for Student's t distribution, the start-up value for conditional variance, and the heteroscedasticity model parameters η specified by the HETERO statement.

The following is an example of specifying initial values for an AR(1)-GARCH(1,1) model with regressors X1 and X2:

```
/*-- specifying initial values --*/
model y = w x / nlag=1 garch=(p=1,q=1)
           initial=(1 1 1 .5 .8 .1 .6);
```

The model specified by this MODEL statement is

$$y_t = \beta_0 + \beta_1 w_t + \beta_2 x_t + v_t$$

$$v_t = \epsilon_t - \phi_1 v_{t-1}$$

$$\epsilon_t = \sqrt{h_t} e_t$$

$$h_t = \omega + \alpha_1 \epsilon_{t-1}^2 + \gamma_1 h_{t-1}$$

$$\epsilon_t \sim N(0, \sigma_t^2)$$

The initial values for the regression parameters, INTERCEPT (β_0), X1 (β_1), and X2 (β_2), are specified as 1. The initial value of the AR(1) coefficient (ϕ_1) is specified as 0.5. The initial value of ARCH0 (ω) is 0.8, the initial value of ARCH1 (α_1) is 0.1, and the initial value of GARCH1 (γ_1) is 0.6.

When you use the RESTRICT statement, the initial values specified by the INITIAL= option should satisfy the restrictions specified for the parameter estimates. If they do not, the initial values you specify are adjusted to satisfy the restrictions.

LDW

specifies that p -values for the Durbin-Watson test be computed using a linearized approximation of the design matrix when the model is nonlinear due to the presence of an autoregressive error process. (The Durbin-Watson tests of the OLS linear regression model residuals are not affected by the LDW option.) Refer to White (1992) for Durbin-Watson testing of nonlinear models.

MAXITER=number

sets the maximum number of iterations allowed. The default is MAXITER=50.

METHOD=value

requests the type of estimates to be computed. The values of the METHOD= option are as follows:

METHOD=ML specifies maximum likelihood estimates.

METHOD=ULS specifies unconditional least squares estimates.

METHOD=YW specifies Yule-Walker estimates.

METHOD=ITYW specifies iterative Yule-Walker estimates.

If the GARCH= or LAGDEP option is specified, the default is METHOD=ML. Otherwise, the default is METHOD=YW.

NOMISS

requests the estimation to the first contiguous sequence of data with no missing values. Otherwise, all complete observations are used.

OPTMETHOD=QN | TR

specifies the optimization technique when the GARCH or heteroscedasticity model is estimated. The OPTMETHOD=QN option specifies the quasi-Newton method. The OPTMETHOD=TR option specifies the trust region method. The default is OPTMETHOD=QN.

HETERO Statement

HETERO *variables / options ;*

The HETERO statement specifies variables that are related to the heteroscedasticity of the residuals and the way these variables are used to model the error variance of the regression.

The heteroscedastic regression model supported by the HETERO statement is

$$y_t = \mathbf{x}_t \beta + \epsilon_t$$

$$\epsilon_t \sim N(0, \sigma_t^2)$$

$$\sigma_t^2 = \sigma^2 h_t$$

$$h_t = l(\mathbf{z}_t' \eta)$$

The HETERO statement specifies a model for the conditional variance h_t . The vector \mathbf{z}_t is composed of the variables listed in the HETERO statement, η is a parameter vector, and $l(\cdot)$ is a link function that depends on the value of the LINK= option. In the printed output, *HET0* represents the estimate of sigma, while *HET1* - *HETn* are the estimates of parameters in the η vector.

The keyword XBETA can be used in the *variables* list to refer to the model predicted value $\mathbf{x}_t' \beta$. If XBETA is specified in the *variables* list, other variables in the HETERO statement will be ignored. In addition, XBETA cannot be specified in the GARCH process.

For heteroscedastic regression models without GARCH effects, the errors ϵ_t are assumed to be uncorrelated — the heteroscedasticity models specified by the HETERO statement cannot be combined with an autoregressive model for the errors. Thus, when a HETERO statement is used, the NLAG= option cannot be specified unless the GARCH= option is also specified.

You can specify the following options in the HETERO statement.

LINK=value

specifies the functional form of the heteroscedasticity model. By default, LINK=EXP. If you specify a GARCH model with the HETERO statement, the model is estimated using LINK=LINEAR only. For details, see the section “Using the HETERO Statement with GARCH Models” on page 372. Values of the LINK= option are as follows:

EXP specifies the exponential link function. The following model is estimated when you specify LINK=EXP:

$$h_t = \exp(\mathbf{z}_t' \eta)$$

SQUARE specifies the square link function. The following model is estimated when you specify LINK=SQUARE:

$$h_t = (1 + \mathbf{z}_t' \eta)^2$$

LINEAR specifies the linear function; that is, the HETERO statement variables predict the error variance linearly. The following model is estimated when you specify LINK=LINEAR:

$$h_t = (1 + \mathbf{z}_t' \eta)$$

COEF=value

imposes constraints on the estimated parameters η of the heteroscedasticity model. The values of the COEF= option are as follows:

NONNEG	specifies that the estimated heteroscedasticity parameters η must be nonnegative. When the HETERO statement is used in conjunction with the GARCH= option, the default is COEF=NONNEG.
UNIT	constrains all heteroscedasticity parameters η to equal 1.
ZERO	constrains all heteroscedasticity parameters η to equal 0.
UNREST	specifies unrestricted estimation of η . When the GARCH= option is not specified, the default is COEF=UNREST.

STD=value

imposes constraints on the estimated standard deviation σ of the heteroscedasticity model. The values of the STD= option are as follows:

NONNEG	specifies that the estimated standard deviation parameter σ must be nonnegative.
UNIT	constrains the standard deviation parameter σ to equal 1.
UNREST	specifies unrestricted estimation of σ . This is the default.

TEST=LM

produces a Lagrange multiplier test for heteroscedasticity. The null hypothesis is homoscedasticity; the alternative hypothesis is heteroscedasticity of the form specified by the HETERO statement. The power of the test depends on the variables specified in the HETERO statement.

The test may give different results depending on the functional form specified by the LINK= option. However, in many cases the test does not depend on the LINK= option. The test is invariant to the form of h_t when $h_t(0) = 1$ and $h'_t(0) \neq 0$. (The condition $h_t(0) = 1$ is satisfied except when the NOCONST option is specified with LINK=SQUARE or LINK=LINEAR.)

NOCONST

specifies that the heteroscedasticity model does not include the unit term for the LINK=SQUARE and LINK=LINEAR options. For example, the following model is estimated when you specify the options LINK=SQUARE NOCONST:

$$h_t = (\mathbf{z}'_t \boldsymbol{\eta})^2$$

NLOPTIONS Statement

NLOPTIONS <options> ;

PROC AUTOREG uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “Nonlinear Optimization Methods.”

OUTPUT Statement

OUTPUT < **OUT=SAS-data-set** > < *options* > < *keyword=name* > ;

The OUTPUT statement creates an output SAS data set as specified by the following options.

OUT=SAS-data-set

names the output SAS data set to contain the predicted and transformed values. If the OUT= option is not specified, the new data set is named according to the DATA*n* convention.

You can specify any of the following *options*.

ALPHACLI=number

sets the confidence limit size for the estimates of future values of the response time series. The ALPHACLI= value must be between 0 and 1. The resulting confidence interval has 1–*number* confidence. The default is ALPHACLI=0.05, which corresponds to a 95% confidence interval.

ALPHACLM=number

sets the confidence limit size for the estimates of the structural or regression part of the model. The ALPHACLI= value must be between 0 and 1. The resulting confidence interval has 1–*number* confidence. The default is ALPHACLM=0.05, which corresponds to a 95% confidence interval.

ALPHACSM=0.01 | 0.05 | 0.10

specifies the significance level for the upper and lower bounds of the CUSUM and CUSUMSQ statistics output by the CUSUMLB=, CUSUMUB=, CUSUMSQLB=, and CUSUMSQUB= options. The significance level specified by the ALPHACSM= option can be 0.01, 0.05, or 0.10. Other values are not supported.

You can specify the following values for *keyword=name*, where *keyword* specifies the statistic to include in the output data set and *name* gives the name of the variable in the OUT= data set to contain the statistic.

BLUS=variable

specifies the name of a variable to contain the values of the Theil's BLUS residuals. Refer to Theil (1971) for more information on BLUS residuals.

CEV=variable

HT=variable

writes to the output data set the value of the error variance σ_t^2 from the heteroscedasticity model specified by the HETERO statement or the value of the conditional error variance h_t by the GARCH= option in the MODEL statement.

CPEV=variable

writes the conditional prediction error variance to the output data set. The value of conditional prediction error variance is equal to that of the conditional error variance when there are no autoregressive parameters. See the section “[Predicted Values](#)” on page 400 for details.

CONSTANT=variable

writes the transformed intercept to the output data set. The details of the transformation are described in “[Computational Methods](#)” on page 367.

CUSUM=variable

specifies the name of a variable to contain the CUSUM statistics.

CUSUMSQ=variable

specifies the name of a variable to contain the CUSUMSQ statistics.

CUSUMUB=variable

specifies the name of a variable to contain the upper confidence bound for the CUSUM statistic.

CUSUMLB=variable

specifies the name of a variable to contain the lower confidence bound for the CUSUM statistic.

CUSUMSQUB=variable

specifies the name of a variable to contain the upper confidence bound for the CUSUMSQ statistic.

CUSUMSQLB=variable

specifies the name of a variable to contain the lower confidence bound for the CUSUMSQ statistic.

LCL=namewrites the lower confidence limit for the predicted value (specified in the PREDICTED= option) to the output data set. The size of the confidence interval is set by the ALPHACLI= option. See the section “[Predicted Values](#)” on page 400 for details.**LCLM=name**

writes the lower confidence limit for the structural predicted value (specified in the PREDICTEDM= option) to the output data set under the name given. The size of the confidence interval is set by the ALPHACLM= option.

PREDICTED=name**P=name**writes the predicted values to the output data set. These values are formed from both the structural and autoregressive parts of the model. See the section “[Predicted Values](#)” on page 400 for details.**PREDICTEDM=name****PM=name**writes the structural predicted values to the output data set. These values are formed from only the structural part of the model. See the section “[Predicted Values](#)” on page 400 for details.**RECPEV=variable**specifies the name of a variable to contain the part of the predictive error variance (v_t) that is used to compute the recursive residuals.**RECRES=variable**

specifies the name of a variable to contain recursive residuals. The recursive residuals are used to compute the CUSUM and CUSUMSQ statistics.

RESIDUAL=name**R=name**

writes the residuals from the predicted values based on both the structural and time series parts of the model to the output data set.

RESIDUALM=*name***RM=***name*

writes the residuals from the structural prediction to the output data set.

TRANSFORM=*variables*

transforms the specified variables from the input data set by the autoregressive model and writes the transformed variables to the output data set. The details of the transformation are described in “[Computational Methods](#)” on page 367. If you need to reproduce the data suitable for reestimation, you must also transform an intercept variable. To do this, transform a variable that is all 1s or use the **CONSTANT=** option.

UCL=*name*

writes the upper confidence limit for the predicted value (specified in the **PREDICTED=** option) to the output data set. The size of the confidence interval is set by the **ALPHACLI=** option. See the section “[Predicted Values](#)” on page 400 for details.

UCLM=*name*

writes the upper confidence limit for the structural predicted value (specified in the **PREDICTEDM=** option) to the output data set. The size of the confidence interval is set by the **ALPHACLM=** option.

RESTRICT Statement

RESTRICT *equation , . . . , equation ;*

The **RESTRICT** statement provides constrained estimation and places restrictions on the parameter estimates for covariates in the preceding **MODEL** statement. The **AR**, **GARCH**, and **HETERO** parameters are also supported in the **RESTRICT** statement. Any number of **RESTRICT** statements can follow a **MODEL** statement. Several restrictions can be specified in a single **RESTRICT** statement by separating the individual restrictions with commas.

Each restriction is written as a linear equation composed of constants and parameter names. Refer to model parameters by the name of the corresponding regressor variable. Each name used in the equation must be a regressor in the preceding **MODEL** statement. Use the keyword **INTERCEPT** to refer to the intercept parameter in the model. See the section “[OUTEST= Data Set](#)” on page 405 for the names of these parameters.

The following is an example of a **RESTRICT** statement:

```
model y = a b c d;
restrict a+b=0, 2*d-c=0;
```

When restricting a linear combination of parameters to be 0, you can omit the equal sign. For example, the following **RESTRICT** statement is equivalent to the preceding example:

```
restrict a+b, 2*d-c;
```

The following **RESTRICT** statement constrains the parameters estimates for three regressors (**X1**, **X2**, and **X3**) to be equal:

```
restrict x1 = x2, x2 = x3;
```

The preceding restriction can be abbreviated as follows:

```
restrict x1 = x2 = x3;
```

The following example shows how to specify AR, GARCH, and HETERO parameters in the RESTRICT statement:

```
model y = a b / nlag=2 garch=(p=2,q=3,mean=sqrt);
hetero c d;
restrict _A_1=0, _AH_2=0.2, _HET_2=1, _DELTA_=0.1;
```

Only simple linear combinations of parameters can be specified in RESTRICT statement expressions; complex expressions that involve parentheses, division, functions, or complex products are not allowed.

TEST Statement

The AUTOREG procedure supports a TEST statement for linear hypothesis tests. The syntax of the TEST statement is

```
TEST equation , ... , equation / option ;
```

The TEST statement tests hypotheses about the covariates in the model that are estimated by the preceding MODEL statement. The AR, GARCH, and HETERO parameters are also supported in the TEST statement. Each equation specifies a linear hypothesis to be tested. If more than one equation is specified, the equations are separated by commas.

Each test is written as a linear equation composed of constants and parameter names. Refer to parameters by the name of the corresponding regressor variable. Each name used in the equation must be a regressor in the preceding MODEL statement. Use the keyword INTERCEPT to refer to the intercept parameter in the model. See the section “[OUTEST= Data Set](#)” on page 405 for the names of these parameters.

You can specify the following options in the TEST statement:

TYPE=*value*

specifies the test statistics to use. The default is TYPE=F. The following values for TYPE= option are available:

F	produces an <i>F</i> test. This option is supported for all models specified in MODEL statement.
WALD	produces a Wald test. This option is supported for all models specified in MODEL statement.
LM	produces a Lagrange multiplier test. This option is supported only when the GARCH= option is specified (for example, when there is a statement like MODEL Y = C D I / GARCH=(Q=2)).

LR	produces a likelihood ratio test. This option is supported only when the GARCH= option is specified (for example, when there is a statement like MODEL Y = C D I / GARCH=(Q=2)).
ALL	produces all tests applicable for a particular model. For non-GARCH-type models, only <i>F</i> and Wald tests are output. For all other models, all four tests (LR, LM, <i>F</i> , and Wald) are computed.

The following example of a TEST statement tests the hypothesis that the coefficients of two regressors A and B are equal:

```
model y = a b c d;
test a = b;
```

To test separate null hypotheses, use separate TEST statements. To test a joint hypothesis, specify the component hypotheses on the same TEST statement, separated by commas.

For example, consider the following linear model:

$$y_t = \beta_0 + \beta_1 x_{1t} + \beta_2 x_{2t} + \epsilon_t$$

The following statements test the two hypotheses $H_0 : \beta_0 = 1$ and $H_0 : \beta_1 + \beta_2 = 0$:

```
model y = x1 x2;
test intercept = 1;
test x1 + x2 = 0;
```

The following statements test the joint hypothesis $H_0 : \beta_0 = 1$ and $\beta_1 + \beta_2 = 0$:

```
model y = x1 x2;
test intercept = 1, x1 + x2 = 0;
```

To illustrate the TYPE= option, consider the following examples.

```
model Y = C D I / garch=(q=2);
test C + D = 1;
```

The preceding statements produce only one default test, the *F* test.

```
model Y = C D I / garch=(q=2);
test C + D = 1 / type = LR;
```

The preceding statements produce one of four tests applicable for GARCH-type models, the likelihood ratio test.

```
model Y = C D I / nlag = 2;
test C + D = 1 / type = LM;
```

The preceding statements produce the warning and do not output any test because the Lagrange multiplier test is not applicable for non-GARCH models.

```
model Y = C D I / nlag=2;
test C + D = 1 / type = ALL;
```

The preceding statements produce all tests that are applicable for non-GARCH models (namely, the F and Wald tests). The TYPE= prefix is optional. Thus the test statement in the previous example could also have been written as:

```
test C + D = 1 / ALL;
```

The following example shows how to test AR, GARCH, and HETERO parameters:

```
model y = a b / nlag=2 garch=(p=2,q=3,mean=sqrt);
hetero c d;
test _A_1=0, _AH_2=0.2, _HET_2=1, _DELTA_=0.1;
```

Details: AUTOREG Procedure

Missing Values

PROC AUTOREG skips any missing values at the beginning of the data set. If the NOMISS option is specified, the first contiguous set of data with no missing values is used; otherwise, all data with nonmissing values for the independent and dependent variables are used. Note, however, that the observations containing missing values are still needed to maintain the correct spacing in the time series. PROC AUTOREG can generate predicted values when the dependent variable is missing.

Autoregressive Error Model

The regression model with autocorrelated disturbances is as follows:

$$y_t = \mathbf{x}_t' \boldsymbol{\beta} + v_t$$

$$v_t = \epsilon_t - \phi_1 v_{t-1} - \dots - \phi_m v_{t-m}$$

$$\epsilon_t \sim N(0, \sigma^2)$$

In these equations, y_t are the dependent values, \mathbf{x}_t is a column vector of regressor variables, $\boldsymbol{\beta}$ is a column vector of structural parameters, and ϵ_t is normally and independently distributed with a mean of 0 and a variance of σ^2 . Note that in this parameterization, the signs of the autoregressive parameters are reversed from the parameterization documented in most of the literature.

PROC AUTOREG offers four estimation methods for the autoregressive error model. The default method, Yule-Walker (YW) estimation, is the fastest computationally. The Yule-Walker method used by PROC AUTOREG is described in Gallant and Goebel (1976). Harvey (1981) calls this method the *two-step full transform method*. The other methods are iterated YW, unconditional least squares (ULS), and maximum likelihood (ML). The ULS method is also referred to as nonlinear least squares (NLS) or exact least squares (ELS).

You can use all of the methods with data containing missing values, but you should use ML estimation if the missing values are plentiful. See the section “[Alternative Autocorrelation Correction Methods](#)” on page 369 later in this chapter for further discussion of the advantages of different methods.

The Yule-Walker Method

Let $\boldsymbol{\varphi}$ represent the vector of autoregressive parameters,

$$\boldsymbol{\varphi} = (\varphi_1, \varphi_2, \dots, \varphi_m)'$$

and let the variance matrix of the error vector $\mathbf{v} = (v_1, \dots, v_N)'$ be $\boldsymbol{\Sigma}$,

$$E(\mathbf{v}\mathbf{v}') = \boldsymbol{\Sigma} = \sigma^2 \mathbf{V}$$

If the vector of autoregressive parameters $\boldsymbol{\varphi}$ is known, the matrix \mathbf{V} can be computed from the autoregressive parameters. $\boldsymbol{\Sigma}$ is then $\sigma^2 \mathbf{V}$. Given $\boldsymbol{\Sigma}$, the efficient estimates of regression parameters $\boldsymbol{\beta}$ can be computed using generalized least squares (GLS). The GLS estimates then yield the unbiased estimate of the variance σ^2 ,

The Yule-Walker method alternates estimation of $\boldsymbol{\beta}$ using generalized least squares with estimation of $\boldsymbol{\varphi}$ using the Yule-Walker equations applied to the sample autocorrelation function. The YW method starts by forming the OLS estimate of $\boldsymbol{\beta}$. Next, $\boldsymbol{\varphi}$ is estimated from the sample autocorrelation function of the OLS residuals by using the Yule-Walker equations. Then \mathbf{V} is estimated from the estimate of $\boldsymbol{\varphi}$, and $\boldsymbol{\Sigma}$ is estimated from \mathbf{V} and the OLS estimate of σ^2 . The autocorrelation corrected estimates of the regression parameters $\boldsymbol{\beta}$ are then computed by GLS, using the estimated $\boldsymbol{\Sigma}$ matrix. These are the Yule-Walker estimates.

If the ITER option is specified, the Yule-Walker residuals are used to form a new sample autocorrelation function, the new autocorrelation function is used to form a new estimate of $\boldsymbol{\varphi}$ and \mathbf{V} , and the GLS estimates are recomputed using the new variance matrix. This alternation of estimates continues until either the maximum change in the $\hat{\boldsymbol{\varphi}}$ estimate between iterations is less than the value specified by the CONVERGE= option or the maximum number of allowed iterations is reached. This produces the iterated Yule-Walker estimates. Iteration of the estimates may not yield much improvement.

The Yule-Walker equations, solved to obtain $\hat{\boldsymbol{\varphi}}$ and a preliminary estimate of σ^2 , are

$$\mathbf{R}\hat{\boldsymbol{\varphi}} = -\mathbf{r}$$

Here $\mathbf{r} = (r_1, \dots, r_m)'$, where r_i is the lag i sample autocorrelation. The matrix \mathbf{R} is the Toeplitz matrix whose i, j th element is $r_{|i-j|}$. If you specify a subset model, then only the rows and columns of \mathbf{R} and \mathbf{r} corresponding to the subset of lags specified are used.

If the BACKSTEP option is specified, for purposes of significance testing, the matrix $[\mathbf{R} \mathbf{r}]$ is treated as a sum-of-squares-and-crossproducts matrix arising from a simple regression with $N - k$ observations, where k is the number of estimated parameters.

The Unconditional Least Squares and Maximum Likelihood Methods

Define the transformed error, \mathbf{e} , as

$$\mathbf{e} = \mathbf{L}^{-1}\mathbf{n}$$

where $\mathbf{n} = \mathbf{y} - \mathbf{X}\beta$.

The unconditional sum of squares for the model, S , is

$$S = \mathbf{n}'\mathbf{V}^{-1}\mathbf{n} = \mathbf{e}'\mathbf{e}$$

The ULS estimates are computed by minimizing S with respect to the parameters β and φ_i .

The full log likelihood function for the autoregressive error model is

$$l = -\frac{N}{2}\ln(2\pi) - \frac{N}{2}\ln(\sigma^2) - \frac{1}{2}\ln(|\mathbf{V}|) - \frac{S}{2\sigma^2}$$

where $|\mathbf{V}|$ denotes determinant of \mathbf{V} . For the ML method, the likelihood function is maximized by minimizing an equivalent sum-of-squares function.

Maximizing l with respect to σ^2 (and concentrating σ^2 out of the likelihood) and dropping the constant term $-\frac{N}{2}\ln(2\pi) + 1 - \ln(N)$ produces the concentrated log likelihood function

$$l_c = -\frac{N}{2}\ln(S|\mathbf{V}|^{1/N})$$

Rewriting the variable term within the logarithm gives

$$S_{ml} = |\mathbf{L}|^{1/N} \mathbf{e}'\mathbf{e} |\mathbf{L}|^{1/N}$$

PROC AUTOREG computes the ML estimates by minimizing the objective function $S_{ml} = |\mathbf{L}|^{1/N} \mathbf{e}'\mathbf{e} |\mathbf{L}|^{1/N}$.

The maximum likelihood estimates may not exist for some data sets (Anderson and Mentz 1980). This is the case for very regular data sets, such as an exact linear trend.

Computational Methods

Sample Autocorrelation Function

The sample autocorrelation function is computed from the structural residuals or noise $\mathbf{n}_t = y_t - \mathbf{x}_t'\mathbf{b}$, where \mathbf{b} is the current estimate of β . The sample autocorrelation function is the sum of all available lagged products of \mathbf{n}_t of order j divided by $\ell + j$, where ℓ is the number of such products.

If there are no missing values, then $\ell + j = N$, the number of observations. In this case, the Toeplitz matrix of autocorrelations, \mathbf{R} , is at least positive semidefinite. If there are missing values, these autocorrelation estimates of r can yield an \mathbf{R} matrix that is not positive semidefinite. If such estimates occur, a warning message is printed, and the estimates are tapered by exponentially declining weights until \mathbf{R} is positive definite.

Data Transformation and the Kalman Filter

The calculation of \mathbf{V} from $\boldsymbol{\varphi}$ for the general $\text{AR}(m)$ model is complicated, and the size of \mathbf{V} depends on the number of observations. Instead of actually calculating \mathbf{V} and performing GLS in the usual way, in practice a Kalman filter algorithm is used to transform the data and compute the GLS results through a recursive process.

In all of the estimation methods, the original data are transformed by the inverse of the Cholesky root of \mathbf{V} . Let \mathbf{L} denote the Cholesky root of \mathbf{V} — that is, $\mathbf{V} = \mathbf{L}\mathbf{L}'$ with \mathbf{L} lower triangular. For an AR(m) model, \mathbf{L}^{-1} is a band diagonal matrix with m anomalous rows at the beginning and the autoregressive parameters along the remaining rows. Thus, if there are no missing values, after the first $m - 1$ observations the data are transformed as

$$z_t = x_t + \hat{\phi}_1 x_{t-1} + \dots + \hat{\phi}_m x_{t-m}$$

The transformation is carried out using a Kalman filter, and the lower triangular matrix \mathbf{L} is never directly computed. The Kalman filter algorithm, as it applies here, is described in Harvey and Phillips (1979) and Jones (1980). Although \mathbf{L} is not computed explicitly, for ease of presentation the remaining discussion is in terms of \mathbf{L} . If there are missing values, then the submatrix of \mathbf{L} consisting of the rows and columns with nonmissing values is used to generate the transformations.

Gauss-Newton Algorithms

The ULS and ML estimates employ a Gauss-Newton algorithm to minimize the sum of squares and maximize the log likelihood, respectively. The relevant optimization is performed simultaneously for both the regression and AR parameters. The OLS estimates of β and the Yule-Walker estimates of ϕ are used as starting values for these methods.

The Gauss-Newton algorithm requires the derivatives of \mathbf{e} or $|\mathbf{L}|^{1/N} \mathbf{e}$ with respect to the parameters. The derivatives with respect to the parameter vector β are

$$\begin{aligned} \frac{\partial \mathbf{e}}{\partial \beta'} &= -\mathbf{L}^{-1} \mathbf{X} \\ \frac{\partial |\mathbf{L}|^{1/N} \mathbf{e}}{\partial \beta'} &= -|\mathbf{L}|^{1/N} \mathbf{L}^{-1} \mathbf{X} \end{aligned}$$

These derivatives are computed by the transformation described previously. The derivatives with respect to ϕ are computed by differentiating the Kalman filter recurrences and the equations for the initial conditions.

Variance Estimates and Standard Errors

For the Yule-Walker method, the estimate of the error variance, s^2 , is the error sum of squares from the last application of GLS, divided by the error degrees of freedom (number of observations N minus the number of free parameters).

The variance-covariance matrix for the components of \mathbf{b} is taken as $s^2(\mathbf{X}'\mathbf{V}^{-1}\mathbf{X})^{-1}$ for the Yule-Walker method. For the ULS and ML methods, the variance-covariance matrix of the parameter estimates is computed as $s^2(\mathbf{J}'\mathbf{J})^{-1}$. For the ULS method, \mathbf{J} is the matrix of derivatives of \mathbf{e} with respect to the parameters. For the ML method, \mathbf{J} is the matrix of derivatives of $|\mathbf{L}|^{1/N} \mathbf{e}$ divided by $|\mathbf{L}|^{1/N}$. The estimate of the variance-covariance matrix of \mathbf{b} assuming that ϕ is known is $s^2(\mathbf{X}'\mathbf{V}^{-1}\mathbf{X})^{-1}$. For OLS model, the estimate of the variance-covariance matrix is $s^2(\mathbf{X}'\mathbf{X})^{-1}$.

Park and Mitchell (1980) investigated the small sample performance of the standard error estimates obtained from some of these methods. In particular, simulating an AR(1) model for the noise term, they found that

the standard errors calculated using GLS with an estimated autoregressive parameter underestimated the true standard errors. These estimates of standard errors are the ones calculated by PROC AUTOREG with the Yule-Walker method.

The estimates of the standard errors calculated with the ULS or ML method take into account the joint estimation of the AR and the regression parameters and may give more accurate standard-error values than the YW method. At the same values of the autoregressive parameters, the ULS and ML standard errors will always be larger than those computed from Yule-Walker. However, simulations of the models used by Park and Mitchell (1980) suggest that the ULS and ML standard error estimates can also be underestimates. Caution is advised, especially when the estimated autocorrelation is high and the sample size is small.

High autocorrelation in the residuals is a symptom of lack of fit. An autoregressive error model should not be used as a nostrum for models that simply do not fit. It is often the case that time series variables tend to move as a random walk. This means that an AR(1) process with a parameter near one absorbs a great deal of the variation. See [Example 8.3](#), which fits a linear trend to a sine wave.

For ULS or ML estimation, the joint variance-covariance matrix of all the regression and autoregression parameters is computed. For the Yule-Walker method, the variance-covariance matrix is computed only for the regression parameters.

Lagged Dependent Variables

The Yule-Walker estimation method is not directly appropriate for estimating models that include lagged dependent variables among the regressors. Therefore, the maximum likelihood method is the default when the LAGDEP or LAGDEP= option is specified in the MODEL statement. However, when lagged dependent variables are used, the maximum likelihood estimator is not exact maximum likelihood but is conditional on the first few values of the dependent variable.

Alternative Autocorrelation Correction Methods

Autocorrelation correction in regression analysis has a long history, and various approaches have been suggested. Moreover, the same method may be referred to by different names.

Pioneering work in the field was done by Cochrane and Orcutt (1949). The *Cochrane-Orcutt method* refers to a more primitive version of the Yule-Walker method that drops the first observation. The Cochrane-Orcutt method is like the Yule-Walker method for first-order autoregression, except that the Yule-Walker method retains information from the first observation. The iterative Cochrane-Orcutt method is also in use.

The Yule-Walker method used by PROC AUTOREG is also known by other names. Harvey (1981) refers to the Yule-Walker method as the *two-step full transform method*. The Yule-Walker method can be considered as generalized least squares using the OLS residuals to estimate the covariances across observations, and Judge et al. (1985) use the term *estimated generalized least squares* (EGLS) for this method. For a first-order AR process, the Yule-Walker estimates are often termed *Prais-Winsten estimates* (Prais and Winsten 1954). There are variations to these methods that use different estimators of the autocorrelations or the autoregressive parameters.

The unconditional least squares (ULS) method, which minimizes the error sum of squares for all observations, is referred to as the nonlinear least squares (NLS) method by Spitzer (1979).

The *Hildreth-Lu* method (Hildreth and Lu 1960) uses nonlinear least squares to jointly estimate the parameters with an AR(1) model, but it omits the first transformed residual from the sum of squares. Thus, the Hildreth-Lu method is a more primitive version of the ULS method supported by PROC AUTOREG in the same way Cochrane-Orcutt is a more primitive version of Yule-Walker.

The maximum likelihood method is also widely cited in the literature. Although the maximum likelihood method is well defined, some early literature refers to estimators that are called maximum likelihood but are not full unconditional maximum likelihood estimates. The AUTOREG procedure produces full unconditional maximum likelihood estimates.

Harvey (1981) and Judge et al. (1985) summarize the literature on various estimators for the autoregressive error model. Although asymptotically efficient, the various methods have different small sample properties. Several Monte Carlo experiments have been conducted, although usually for the AR(1) model.

Harvey and McAvinchey (1978) found that for a one-variable model, when the independent variable is trending, methods similar to Cochrane-Orcutt are inefficient in estimating the structural parameter. This is not surprising since a pure trend model is well modeled by an autoregressive process with a parameter close to 1.

Harvey and McAvinchey (1978) also made the following conclusions:

- The Yule-Walker method appears to be about as efficient as the maximum likelihood method. Although Spitzer (1979) recommended ML and NLS, the Yule-Walker method (labeled Prais-Winsten) did as well or better in estimating the structural parameter in Spitzer's Monte Carlo study (table A2 in their article) when the autoregressive parameter was not too large. Maximum likelihood tends to do better when the autoregressive parameter is large.
- For small samples, it is important to use a full transformation (Yule-Walker) rather than the Cochrane-Orcutt method, which loses the first observation. This was also demonstrated by Maeshiro (1976), Chipman (1979), and Park and Mitchell (1980).
- For large samples (Harvey and McAvinchey used 100), losing the first few observations does not make much difference.

GARCH Models

Consider the series y_t , which follows the GARCH process. The conditional distribution of the series Y for time t is written

$$y_t | \Psi_{t-1} \sim N(0, h_t)$$

where Ψ_{t-1} denotes all available information at time $t - 1$. The conditional variance h_t is

$$h_t = \omega + \sum_{i=1}^q \alpha_i y_{t-i}^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

where

$$p \geq 0, q > 0$$

$$\omega > 0, \alpha_i \geq 0, \gamma_j \geq 0$$

The GARCH(p, q) model reduces to the ARCH(q) process when $p = 0$. At least one of the ARCH parameters must be nonzero ($q > 0$). The GARCH regression model can be written

$$y_t = \mathbf{x}_t' \beta + \epsilon_t$$

$$\epsilon_t = \sqrt{h_t} e_t$$

$$h_t = \omega + \sum_{i=1}^q \alpha_i \epsilon_{t-i}^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

where $e_t \sim \text{IN}(0, 1)$.

In addition, you can consider the model with disturbances following an autoregressive process and with the GARCH errors. The AR(m)-GARCH(p, q) regression model is denoted

$$y_t = \mathbf{x}_t' \beta + v_t$$

$$v_t = \epsilon_t - \phi_1 v_{t-1} - \dots - \phi_m v_{t-m}$$

$$\epsilon_t = \sqrt{h_t} e_t$$

$$h_t = \omega + \sum_{i=1}^q \alpha_i \epsilon_{t-i}^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

GARCH Estimation with Nelson-Cao Inequality Constraints

The GARCH(p, q) model is written in ARCH(∞) form as

$$\begin{aligned} h_t &= \left(1 - \sum_{j=1}^p \gamma_j B^j \right)^{-1} \left[\omega + \sum_{i=1}^q \alpha_i \epsilon_{t-i}^2 \right] \\ &= \omega^* + \sum_{i=1}^{\infty} \phi_i \epsilon_{t-i}^2 \end{aligned}$$

where B is a backshift operator. Therefore, $h_t \geq 0$ if $\omega^* \geq 0$ and $\phi_i \geq 0, \forall i$. Assume that the roots of the following polynomial equation are inside the unit circle:

$$\sum_{j=0}^p -\gamma_j Z^{p-j}$$

where $\gamma_0 = -1$ and Z is a complex scalar. $-\sum_{j=0}^p \gamma_j Z^{p-j}$ and $\sum_{i=1}^q \alpha_i Z^{q-i}$ do not share common factors. Under these conditions, $|\omega^*| < \infty$, $|\phi_i| < \infty$, and these coefficients of the ARCH(∞) process are well defined.

Define $n = \max(p, q)$. The coefficient ϕ_i is written

$$\begin{aligned}\phi_0 &= \alpha_1 \\ \phi_1 &= \gamma_1 \phi_0 + \alpha_2 \\ &\dots \\ \phi_{n-1} &= \gamma_1 \phi_{n-2} + \gamma_2 \phi_{n-3} + \dots + \gamma_{n-1} \phi_0 + \alpha_n \\ \phi_k &= \gamma_1 \phi_{k-1} + \gamma_2 \phi_{k-2} + \dots + \gamma_n \phi_{k-n} \text{ for } k \geq n\end{aligned}$$

where $\alpha_i = 0$ for $i > q$ and $\gamma_j = 0$ for $j > p$.

Nelson and Cao (1992) proposed the finite inequality constraints for GARCH(1, q) and GARCH(2, q) cases. However, it is not straightforward to derive the finite inequality constraints for the general GARCH(p, q) model.

For the GARCH(1, q) model, the nonlinear inequality constraints are

$$\begin{aligned}\omega &\geq 0 \\ \gamma_1 &\geq 0 \\ \phi_k &\geq 0 \text{ for } k = 0, 1, \dots, q-1\end{aligned}$$

For the GARCH(2, q) model, the nonlinear inequality constraints are

$$\begin{aligned}\Delta_i &\in R \text{ for } i = 1, 2 \\ \omega^* &\geq 0 \\ \Delta_1 &> 0 \\ \sum_{j=0}^{q-1} \Delta_1^{-j} \alpha_{j+1} &> 0 \\ \phi_k &\geq 0 \text{ for } k = 0, 1, \dots, q\end{aligned}$$

where Δ_1 and Δ_2 are the roots of $(Z^2 - \gamma_1 Z - \gamma_2)$.

For the GARCH(p, q) model with $p > 2$, only $\max(q-1, p)+1$ nonlinear inequality constraints ($\phi_k \geq 0$ for $k = 0$ to $\max(q-1, p)$) are imposed, together with the in-sample positivity constraints of the conditional variance h_t .

Using the HETERO Statement with GARCH Models

The HETERO statement can be combined with the GARCH= option in the MODEL statement to include input variables in the GARCH conditional variance model. For example, the GARCH(1, 1) variance model with two dummy input variables D1 and D2 is

$$\begin{aligned}\epsilon_t &= \sqrt{h_t} e_t \\ h_t &= \omega + \alpha_1 \epsilon_{t-1}^2 + \gamma_1 h_{t-1} + \eta_1 D1_t + \eta_2 D2_t\end{aligned}$$

The following statements estimate this GARCH model:

```
proc autoreg data=one;
  model y = x z / garch=(p=1,q=1);
  hetero d1 d2;
run;
```

The parameters for the variables D1 and D2 can be constrained using the COEF= option. For example, the constraints $\eta_1 = \eta_2 = 1$ are imposed by the following statements:

```
proc autoreg data=one;
  model y = x z / garch=(p=1,q=1);
  hetero d1 d2 / coef=unit;
run;
```

Limitations of GARCH and Heteroscedasticity Specifications

When you specify both the GARCH= option and the HETERO statement, the GARCH=(TYPE=EXP) option is not valid. The COVEST= option is not applicable to the EGARCH model.

IGARCH and Stationary GARCH Model

The condition $\sum_{i=1}^q \alpha_i + \sum_{j=1}^p \gamma_j < 1$ implies that the GARCH process is weakly stationary since the mean, variance, and autocovariance are finite and constant over time. When the GARCH process is stationary, the unconditional variance of ϵ_t is computed as

$$V(\epsilon_t) = \frac{\omega}{(1 - \sum_{i=1}^q \alpha_i - \sum_{j=1}^p \gamma_j)}$$

where $\epsilon_t = \sqrt{h_t} e_t$ and h_t is the GARCH(p, q) conditional variance.

Sometimes the multistep forecasts of the variance do not approach the unconditional variance when the model is integrated in variance; that is, $\sum_{i=1}^q \alpha_i + \sum_{j=1}^p \gamma_j = 1$.

The unconditional variance for the IGARCH model does not exist. However, it is interesting that the IGARCH model can be strongly stationary even though it is not weakly stationary. Refer to Nelson (1990) for details.

EGARCH Model

The EGARCH model was proposed by Nelson (1991). Nelson and Cao (1992) argue that the nonnegativity constraints in the linear GARCH model are too restrictive. The GARCH model imposes the nonnegative constraints on the parameters, α_i and γ_j , while there are no restrictions on these parameters in the EGARCH model. In the EGARCH model, the conditional variance, h_t , is an asymmetric function of lagged disturbances ϵ_{t-i} :

$$\ln(h_t) = \omega + \sum_{i=1}^q \alpha_i g(z_{t-i}) + \sum_{j=1}^p \gamma_j \ln(h_{t-j})$$

where

$$g(z_t) = \theta z_t + \gamma[|z_t| - E|z_t|]$$

$$z_t = \epsilon_t / \sqrt{h_t}$$

The coefficient of the second term in $g(z_t)$ is set to be 1 ($\gamma=1$) in our formulation. Note that $E|z_t| = (2/\pi)^{1/2}$ if $z_t \sim N(0, 1)$. The properties of the EGARCH model are summarized as follows:

- The function $g(z_t)$ is linear in z_t with slope coefficient $\theta + 1$ if z_t is positive while $g(z_t)$ is linear in z_t with slope coefficient $\theta - 1$ if z_t is negative.
- Suppose that $\theta = 0$. Large innovations increase the conditional variance if $|z_t| - E|z_t| > 0$ and decrease the conditional variance if $|z_t| - E|z_t| < 0$.
- Suppose that $\theta < 1$. The innovation in variance, $g(z_t)$, is positive if the innovations z_t are less than $(2/\pi)^{1/2}/(\theta - 1)$. Therefore, the negative innovations in returns, ϵ_t , cause the innovation to the conditional variance to be positive if θ is much less than 1.

QGARCH, TGARCH, and PGARCH Models

As shown in many empirical studies, positive and negative innovations have different impacts on future volatility. There is a long list of variations of GARCH models that consider the asymmetry. Three typical variations are the quadratic GARCH (QGARCH) model (Engle and Ng 1993), the threshold GARCH (TGARCH) model (Glosten, Jaganathan, and Runkle 1993; Zakoian 1994), and the power GARCH (PGARCH) model (Ding, Granger, and Engle 1993). For more details about the asymmetric GARCH models, see Engle and Ng (1993).

In the QGARCH model, the lagged errors' centers are shifted from zero to some constant values:

$$h_t = \omega + \sum_{i=1}^q \alpha_i (\epsilon_{t-i} - \psi_i)^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

In the TGARCH model, there is an extra slope coefficient for each lagged squared error,

$$h_t = \omega + \sum_{i=1}^q (\alpha_i + 1_{\epsilon_{t-i} < 0} \psi_i) \epsilon_{t-i}^2 + \sum_{j=1}^p \gamma_j h_{t-j}$$

where the indicator function $1_{\epsilon_t < 0}$ is one if $\epsilon_t < 0$; otherwise, zero.

The PGARCH model not only considers the asymmetric effect, but also provides another way to model the long memory property in the volatility,

$$h_t^\lambda = \omega + \sum_{i=1}^q \alpha_i (|\epsilon_{t-i}| - \psi_i \epsilon_{t-i})^{2\lambda} + \sum_{j=1}^p \gamma_j h_{t-j}^\lambda$$

where $\lambda > 0$ and $|\psi_i| \leq 1, i = 1, \dots, q$.

Note that the implemented TGARCH model is also well known as GJR-GARCH (Glosten, Jaganathan, and Runkle 1993), which is similar to the threshold GARCH model proposed by Zakoian (1994) but not exactly same. In Zakoian's model, the conditional standard deviation is a linear function of the past values of the white noise. Zakoian's version can be regarded as a special case of PGARCH model when $\lambda = 1/2$.

GARCH-in-Mean

The GARCH-M model has the added regressor that is the conditional standard deviation:

$$y_t = \mathbf{x}_t' \beta + \delta \sqrt{h_t} + \epsilon_t$$

$$\epsilon_t = \sqrt{h_t} e_t$$

where h_t follows the ARCH or GARCH process.

Maximum Likelihood Estimation

The family of GARCH models are estimated using the maximum likelihood method. The log-likelihood function is computed from the product of all conditional densities of the prediction errors.

When e_t is assumed to have a standard normal distribution ($e_t \sim N(0, 1)$), the log-likelihood function is given by

$$l = \sum_{t=1}^N \frac{1}{2} \left[-\ln(2\pi) - \ln(h_t) - \frac{\epsilon_t^2}{h_t} \right]$$

where $\epsilon_t = y_t - \mathbf{x}_t' \beta$ and h_t is the conditional variance. When the GARCH(p, q)-M model is estimated, $\epsilon_t = y_t - \mathbf{x}_t' \beta - \delta \sqrt{h_t}$. When there are no regressors, the residuals ϵ_t are denoted as y_t or $y_t - \delta \sqrt{h_t}$.

If e_t has the standardized Student's t distribution, the log-likelihood function for the conditional t distribution is

$$\begin{aligned} \ell = \sum_{t=1}^N & \left[\ln \left(\Gamma \left(\frac{\nu+1}{2} \right) \right) - \ln \left(\Gamma \left(\frac{\nu}{2} \right) \right) - \frac{1}{2} \ln((\nu-2)\pi h_t) \right. \\ & \left. - \frac{1}{2}(\nu+1) \ln \left(1 + \frac{\epsilon_t^2}{h_t(\nu-2)} \right) \right] \end{aligned}$$

where $\Gamma(\cdot)$ is the gamma function and ν is the degree of freedom ($\nu > 2$). Under the conditional t distribution, the additional parameter $1/\nu$ is estimated. The log-likelihood function for the conditional t distribution converges to the log-likelihood function of the conditional normal GARCH model as $1/\nu \rightarrow 0$.

The likelihood function is maximized via either the dual quasi-Newton or the trust region algorithm. The default is the dual quasi-Newton algorithm. The starting values for the regression parameters β are obtained from the OLS estimates. When there are autoregressive parameters in the model, the initial values are obtained from the Yule-Walker estimates. The starting value 1.0^{-6} is used for the GARCH process parameters.

The variance-covariance matrix is computed using the Hessian matrix. The dual quasi-Newton method approximates the Hessian matrix while the quasi-Newton method gets an approximation of the inverse of Hessian. The trust region method uses the Hessian matrix obtained using numerical differentiation. When there are active constraints, that is, $\mathbf{q}(\theta) = \mathbf{0}$, the variance-covariance matrix is given by

$$\mathbf{V}(\hat{\theta}) = \mathbf{H}^{-1}[\mathbf{I} - \mathbf{Q}'(\mathbf{QH}^{-1}\mathbf{Q}')^{-1}\mathbf{QH}^{-1}]$$

where $\mathbf{H} = -\partial^2 l / \partial \theta \partial \theta'$ and $\mathbf{Q} = \partial \mathbf{q}(\theta) / \partial \theta'$. Therefore, the variance-covariance matrix without active constraints reduces to $\mathbf{V}(\hat{\theta}) = \mathbf{H}^{-1}$.

Heteroscedasticity Consistent Covariance Matrix Estimator

The heteroscedasticity consistent covariance matrix estimator (HCCME), also well-known as the sandwich (or robust or empirical) covariance matrix estimator, has been popular in recent years since it gives the consistent estimation of the covariance matrix of the parameter estimates even when the heteroscedasticity structure might be unknown or misspecified. White (1980) first proposes the concept of HCCME, known as HC0. However, the small-sample performance of HC0 is not good in some cases. Davidson and MacKinnon (1993) introduce more improvements of HC0, namely HC1, HC2 and HC3, with the degrees of freedom or leverage adjustment. Cribari-Neto (2004) proposes HC4 to deal with cases that have points of high leverage.

HCCME can be expressed in the following general “sandwich” form:

$$\Sigma = B^{-1}MB^{-1}$$

where B , which stands for “bread”, is the Hessian matrix and M , which stands for “meat”, is the outer product of gradient (OPG) with or without adjustment. For HC0, M is the OPG without adjustment; that is,

$$M_{\text{HC0}} = \sum_{t=1}^T g_t g_t'$$

where T is the sample size and g_t is the gradient vector of t th observation. For HC1, M is the OPG with the degrees of freedom correction; that is,

$$M_{\text{HC1}} = \frac{T}{T-k} \sum_{t=1}^T g_t g_t'$$

where k is the number of parameters. For HC2, HC3, and HC4, the adjustment is related to leverage, namely,

$$M_{\text{HC2}} = \sum_{t=1}^T \frac{g_t g_t'}{1 - h_{tt}} \quad M_{\text{HC3}} = \sum_{t=1}^T \frac{g_t g_t'}{(1 - h_{tt})^2} \quad M_{\text{HC4}} = \sum_{t=1}^T \frac{g_t g_t'}{(1 - h_{tt})^{\min(4, Th_{tt}/k)}}$$

The leverage h_{tt} is defined as $h_{tt} \equiv j_t'(\sum_{t=1}^T j_t j_t')^{-1} j_t$, where j_t is defined as follows:

- For an OLS model, j_t is the t th observed regressors in column vector form.
- For an AR error model, j_t is the derivative vector of the t th residual with respect to the parameters.
- For a GARCH or heteroscedasticity model, j_t is the gradient of the t th observation (that is, g_t).

Goodness-of-Fit Measures and Information Criteria

This section discusses various goodness-of-fit statistics produced by the AUTOREG procedure.

Total R-Square Statistic

The total R-Square statistic (Total Rsq) is computed as

$$R_{\text{tot}}^2 = 1 - \frac{\text{SSE}}{\text{SST}}$$

where SST is the sum of squares for the original response variable corrected for the mean and SSE is the final error sum of squares. The Total Rsq is a measure of how well the next value can be predicted using the structural part of the model and the past values of the residuals. If the NOINT option is specified, SST is the uncorrected sum of squares.

Regression R-Square Statistic

The regression R-Square statistic (Reg RSQ) is computed as

$$R_{\text{reg}}^2 = 1 - \frac{\text{TSSE}}{\text{TSST}}$$

where TSST is the total sum of squares of the transformed response variable corrected for the transformed intercept, and TSSE is the error sum of squares for this transformed regression problem. If the NOINT option is requested, no correction for the transformed intercept is made. The Reg RSQ is a measure of the fit of the structural part of the model after transforming for the autocorrelation and is the R-Square for the transformed regression.

The regression R-Square and the total R-Square should be the same when there is no autocorrelation correction (OLS regression).

Mean Absolute Error and Mean Absolute Percentage Error

The mean absolute error (MAE) is computed as

$$\text{MAE} = \frac{1}{T} \sum_{t=1}^T |e_t|$$

where e_t are the estimated model residuals and T is the number of observations.

The mean absolute percentage error (MAPE) is computed as

$$\text{MAPE} = \frac{1}{T'} \sum_{t=1}^T \delta_{y_t \neq 0} \frac{|e_t|}{|y_t|}$$

where e_t are the estimated model residuals, y_t are the original response variable observations, $\delta_{y_t \neq 0} = 1$ if $y_t \neq 0$, $\delta_{y_t \neq 0} |e_t/y_t| = 0$ if $y_t = 0$, and T' is the number of nonzero original response variable observations.

Calculation of Recursive Residuals and CUSUM Statistics

The recursive residuals w_t are computed as

$$w_t = \frac{e_t}{\sqrt{v_t}}$$

$$e_t = y_t - \mathbf{x}_t' \boldsymbol{\beta}^{(t)}$$

$$\boldsymbol{\beta}^{(t)} = \left[\sum_{i=1}^{t-1} \mathbf{x}_i \mathbf{x}_i' \right]^{-1} \left(\sum_{i=1}^{t-1} \mathbf{x}_i y_i \right)$$

$$v_t = 1 + \mathbf{x}_t' \left[\sum_{i=1}^{t-1} \mathbf{x}_i \mathbf{x}_i' \right]^{-1} \mathbf{x}_t$$

Note that the first $\boldsymbol{\beta}^{(t)}$ can be computed for $t = p + 1$, where p is the number of regression coefficients. As a result, first p recursive residuals are not defined. Note also that the forecast error variance of e_t is the scalar multiple of v_t such that $V(e_t) = \sigma^2 v_t$.

The CUSUM and CUSUMSQ statistics are computed using the preceding recursive residuals.

$$\text{CUSUM}_t = \sum_{i=k+1}^t \frac{w_i}{\sigma_w}$$

$$\text{CUSUMSQ}_t = \frac{\sum_{i=k+1}^t w_i^2}{\sum_{i=k+1}^T w_i^2}$$

where w_i are the recursive residuals,

$$\sigma_w = \sqrt{\frac{\sum_{i=k+1}^T (w_i - \hat{w})^2}{(T - k - 1)}}$$

$$\hat{w} = \frac{1}{T - k} \sum_{i=k+1}^T w_i$$

and k is the number of regressors.

The CUSUM statistics can be used to test for misspecification of the model. The upper and lower critical values for CUSUM_t are

$$\pm a \left[\sqrt{T-k} + 2 \frac{(t-k)}{(T-k)^{\frac{1}{2}}} \right]$$

where $a = 1.143$ for a significance level 0.01, 0.948 for 0.05, and 0.850 for 0.10. These critical values are output by the CUSUMLB= and CUSUMUB= options for the significance level specified by the ALPHACSM= option.

The upper and lower critical values of CUSUMSQ_t are given by

$$\pm a + \frac{(t-k)}{T-k}$$

where the value of a is obtained from the table by Durbin (1969) if the $\frac{1}{2}(T-k) - 1 \leq 60$. Edgerton and Wells (1994) provided the method of obtaining the value of a for large samples.

These critical values are output by the CUSUMSQLB= and CUSUMSQUB= options for the significance level specified by the ALPHACSM= option.

Information Criteria AIC, AICC, SBC, and HQC

Akaike's information criterion (AIC), the corrected Akaike's information criterion (AICC), Schwarz's Bayesian information criterion (SBC), and the Hannan-Quinn information criterion (HQC), are computed as follows:

$$\text{AIC} = -2\ln(L) + 2k$$

$$\text{AICC} = \text{AIC} + 2 \frac{k(k+1)}{N-k-1}$$

$$\text{SBC} = -2\ln(L) + \ln(N)k$$

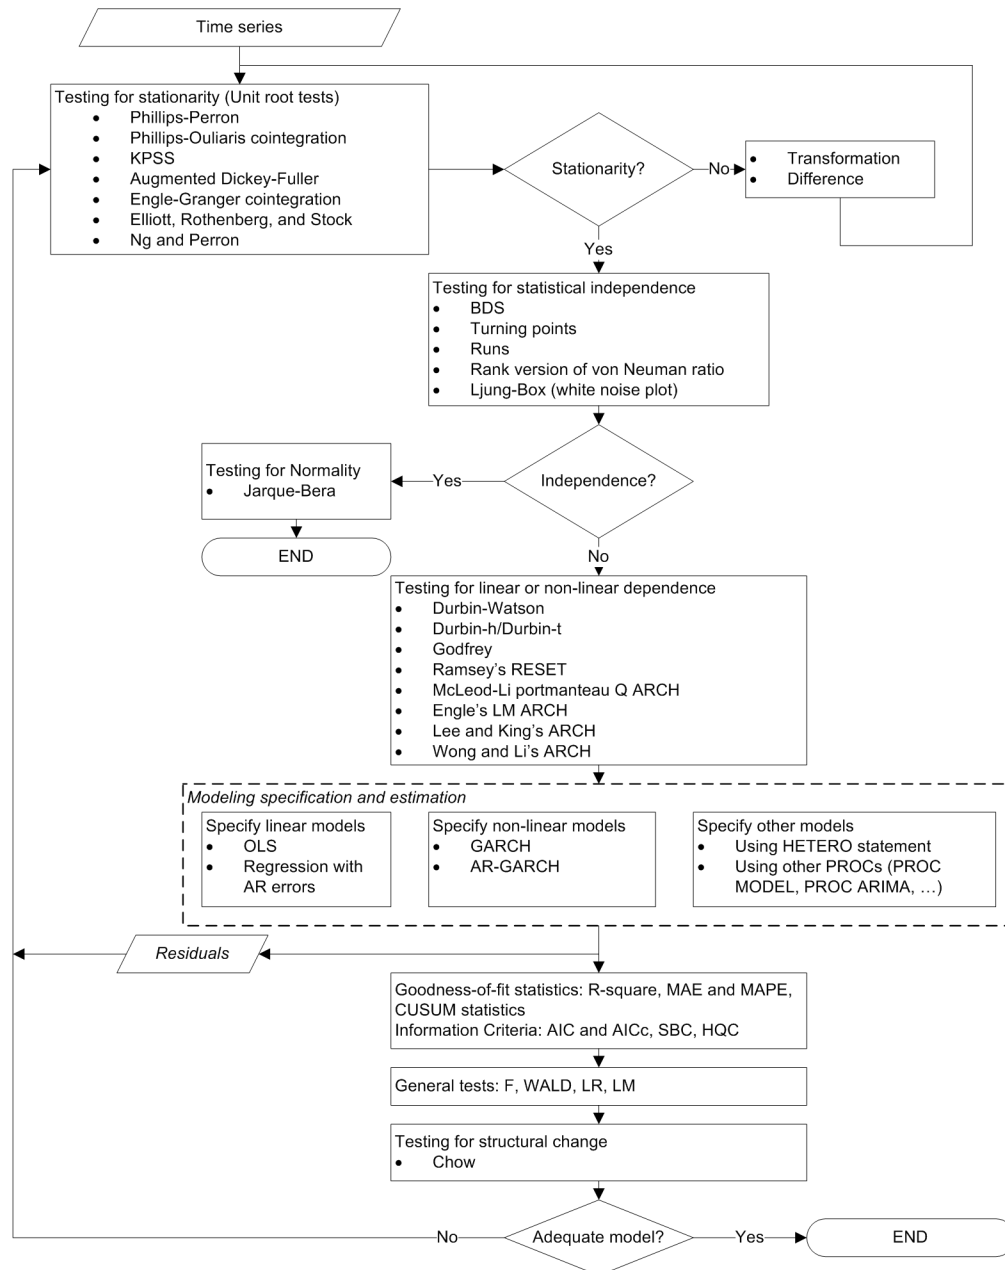
$$\text{HQC} = -2\ln(L) + 2\ln(\ln(N))k$$

In these formulas, L is the value of the likelihood function evaluated at the parameter estimates, N is the number of observations, and k is the number of estimated parameters. Refer to Judge et al. (1985), Hurvich and Tsai (1989), Schwarz (1978) and Hannan and Quinn (1979) for additional details.

Testing

The modeling process consists of four stages: identification, specification, estimation, and diagnostic checking (Cromwell, Labys, and Terraza 1994). The AUTOREG procedure supports tens of statistical tests for identification and diagnostic checking. Figure 8.15 illustrates how to incorporate these statistical tests into the modeling process.

Figure 8.15 Statistical Tests in the AUTOREG procedure



Testing for Stationarity

Most of the theories of time series require stationarity; therefore, it is critical to determine whether a time series is stationary. Two nonstationary time series are fractionally integrated time series and autoregressive series with random coefficients. However, more often some time series are nonstationary due to an upward trend over time. The trend can be captured by either of the following two models.

- The *difference stationary* process

$$(1 - L)y_t = \delta + \psi(L)\epsilon_t$$

where L is the lag operator, $\psi(1) \neq 0$, and ϵ_t is a white noise sequence with mean zero and variance σ^2 . Hamilton (1994) also refers to this model the *unit root* process.

- The *trend stationary* process

$$y_t = \alpha + \delta t + \psi(L)\epsilon_t$$

When a process has a unit root, it is said to be integrated of order one or $I(1)$. An $I(1)$ process is stationary after differencing once. The trend stationary process and difference stationary process require different treatment to transform the process into stationary one for analysis. Therefore, it is important to distinguish the two processes. Bhargava (1986) nested the two processes into the following general model

$$y_t = \gamma_0 + \gamma_1 t + \alpha(y_{t-1} - \gamma_0 - \gamma_1(t-1)) + \psi(L)\epsilon_t$$

However, a difficulty is that the right-hand side is nonlinear in the parameters. Therefore, it is convenient to use a different parametrization

$$y_t = \beta_0 + \beta_1 t + \alpha y_{t-1} + \psi(L)\epsilon_t$$

The test of null hypothesis that $\alpha = 1$ against the one-sided alternative of $\alpha < 1$ is called a *unit root test*.

Dickey-Fuller unit root tests are based on regression models similar to the previous model

$$y_t = \beta_0 + \beta_1 t + \alpha y_{t-1} + \epsilon_t$$

where ϵ_t is assumed to be white noise. The t statistic of the coefficient α does not follow the normal distribution asymptotically. Instead, its distribution can be derived using the functional central limit theorem. Three types of regression models including the preceding one are considered by the Dickey-Fuller test. The deterministic terms that are included in the other two types of regressions are either null or constant only.

An assumption in the Dickey-Fuller unit root test is that it requires the errors in the autoregressive model to be white noise, which is often not true. There are two popular ways to account for general serial correlation between the errors. One is the augmented Dickey-Fuller (ADF) test, which uses the lagged difference in the regression model. This was originally proposed by Dickey and Fuller (1979) and later studied by Said and Dickey (1984) and Phillips and Perron (1988). Another method is proposed by Phillips and Perron (1988); it is called Phillips-Perron (PP) test. The tests adopt the original Dickey-Fuller regression with intercept, but modify the test statistics to take account of the serial correlation and heteroscedasticity. It is called nonparametric because no specific form of the serial correlation of the errors is assumed.

A problem of the augmented Dickey-Fuller and Phillips-Perron unit root tests is that they are subject to size distortion and low power. It is reported in Schwert (1989) that the size distortion is significant when

the series contains a large moving average (MA) parameter. DeJong et al. (1992) find that the ADF has power around one third and PP test has power less than 0.1 against the trend stationary alternative, in some common settings. Among some more recent unit root tests that improve upon the size distortion and the low power are the tests described by Elliott, Rothenberg, and Stock (1996) and Ng and Perron (2001). These tests involve a step of detrending before constructing the test statistics and are demonstrated to perform better than the traditional ADF and PP tests.

Most testing procedures specify the unit root processes as the null hypothesis. Tests of the null hypothesis of stationarity have also been studied, among which Kwiatkowski et al. (1992) is very popular.

Economic theories often dictate that a group of economic time series are linked together by some long-run equilibrium relationship. Statistically, this phenomenon can be modeled by *cointegration*. When several nonstationary processes $\mathbf{z}_t = (z_{1t}, \dots, z_{kt})'$ are cointegrated, there exists a $(k \times 1)$ cointegrating vector \mathbf{c} such that $\mathbf{c}'\mathbf{z}_t$ is stationary and \mathbf{c} is a nonzero vector. One way to test the relationship of cointegration is the *residual based cointegration test*, which assumes the regression model

$$y_t = \beta_1 + \mathbf{x}_t' \boldsymbol{\beta} + u_t$$

where $y_t = z_{1t}$, $\mathbf{x}_t = (z_{2t}, \dots, z_{kt})'$, and $\boldsymbol{\beta} = (\beta_2, \dots, \beta_k)'$. The OLS residuals from the regression model are used to test for the null hypothesis of no cointegration. Engle and Granger (1987) suggest using ADF on the residuals while Phillips and Ouliaris (1990) study the tests using PP and other related test statistics.

Augmented Dickey-Fuller Unit Root and Engle-Granger Cointegration Testing

Common unit root tests have the null hypothesis that there is an autoregressive unit root $H_0 : \alpha = 1$, and the alternative is $H_a : |\alpha| < 1$, where α is the autoregressive coefficient of the time series

$$y_t = \alpha y_{t-1} + \epsilon_t$$

This is referred to as the zero mean model. The standard Dickey-Fuller (DF) test assumes that errors ϵ_t are white noise. There are two other types of regression models that include a constant or a time trend as follows:

$$\begin{aligned} y_t &= \mu + \alpha y_{t-1} + \epsilon_t \\ y_t &= \mu + \beta t + \alpha y_{t-1} + \epsilon_t \end{aligned}$$

These two models are referred to as the constant mean model and the trend model, respectively. The constant mean model includes a constant mean μ of the time series. However, the interpretation of μ depends on the stationarity in the following sense: the mean in the stationary case when $\alpha < 1$ is the trend in the integrated case when $\alpha = 1$. Therefore, the null hypothesis should be the joint hypothesis that $\alpha = 1$ and $\mu = 0$. However for the unit root tests, the test statistics are concerned with the null hypothesis of $\alpha = 1$. The joint null hypothesis is not commonly used. This issue is address in Bhargava (1986) with a different nesting model.

There are two types of test statistics. The conventional t ratio is

$$DF_\tau = \frac{\hat{\alpha} - 1}{sd(\hat{\alpha})}$$

and the second test statistic, called ρ -test, is

$$T(\hat{\alpha} - 1)$$

For the zero mean model, the asymptotic distributions of the Dickey-Fuller test statistics are

$$T(\hat{\alpha} - 1) \Rightarrow \left(\int_0^1 W(r) dW(r) \right) \left(\int_0^1 W(r)^2 dr \right)^{-1}$$

$$DF_{\tau} \Rightarrow \left(\int_0^1 W(r) dW(r) \right) \left(\int_0^1 W(r)^2 dr \right)^{-1/2}$$

For the constant mean model, the asymptotic distributions are

$$T(\hat{\alpha} - 1) \Rightarrow \left([W(1)^2 - 1]/2 - W(1) \int_0^1 W(r) dr \right) \left(\int_0^1 W(r)^2 dr - \left(\int_0^1 W(r) dr \right)^2 \right)^{-1}$$

$$DF_{\tau} \Rightarrow \left([W(1)^2 - 1]/2 - W(1) \int_0^1 W(r) dr \right) \left(\int_0^1 W(r)^2 dr - \left(\int_0^1 W(r) dr \right)^2 \right)^{-1/2}$$

For the trend model, the asymptotic distributions are

$$T(\hat{\alpha} - 1) \Rightarrow \left[W(r) dW + 12 \left(\int_0^1 r W(r) dr - \frac{1}{2} \int_0^1 W(r) dr \right) \left(\int_0^1 W(r) dr - \frac{1}{2} W(1) \right) \right. \\ \left. - W(1) \int_0^1 W(r) dr \right] D^{-1}$$

$$DF_{\tau} \Rightarrow \left[W(r) dW + 12 \left(\int_0^1 r W(r) dr - \frac{1}{2} \int_0^1 W(r) dr \right) \left(\int_0^1 W(r) dr - \frac{1}{2} W(1) \right) \right. \\ \left. - W(1) \int_0^1 W(r) dr \right] D^{1/2}$$

where

$$D = \int_0^1 W(r)^2 dr - 12 \left(\int_0^1 r W(r) dr \right)^2 + 12 \int_0^1 W(r) dr \int_0^1 r W(r) dr - 4 \left(\int_0^1 W(r) dr \right)^2$$

One problem of the Dickey-Fuller and similar tests that employ three types of regressions is the difficulty in the specification of the deterministic trends. Campbell and Perron (1991) claimed that “the proper handling of deterministic trends is a vital prerequisite for dealing with unit roots”. However the “proper handling” is not obvious since the distribution theory of the relevant statistics about the deterministic trends is not available. Hayashi (2000) suggests to using the constant mean model when you think there is no trend, and using the trend model when you think otherwise. However no formal procedure is provided.

The null hypothesis of the Dickey-Fuller test is a random walk, possibly with drift. The differenced process is not serially correlated under the null of $I(1)$. There is a great need for the generalization of this specification. The augmented Dickey-Fuller (ADF) test, originally proposed in Dickey and Fuller (1979), adjusts for the serial correlation in the time series by adding lagged first differences to the autoregressive model,

$$\Delta y_t = \mu + \delta t + \alpha y_{t-1} + \sum_{j=1}^p \alpha_j \Delta y_{t-j} + \epsilon_t$$

where the deterministic terms δt and μ can be absent for the models without drift or linear trend. As previously, there are two types of test statistics. One is the OLS t value

$$\frac{\hat{\alpha} - 1}{sd(\hat{\alpha})}$$

and the other is given by

$$\frac{T(\hat{\alpha} - 1)}{1 - \hat{\alpha}_1 - \dots - \hat{\alpha}_p}$$

The asymptotic distributions of the test statistics are the same as those of the standard Dickey-Fuller test statistics.

Nonstationary multivariate time series can be tested for cointegration, which means that a linear combination of these time series is stationary. Formally, denote the series by $\mathbf{z}_t = (z_{1t}, \dots, z_{kt})'$. The null hypothesis of cointegration is that there exists a vector \mathbf{c} such that $\mathbf{c}'\mathbf{z}_t$ is stationary. Residual-based cointegration tests were studied in Engle and Granger (1987) and Phillips and Ouliaris (1990). The latter are described in the next subsection. The first step regression is

$$y_t = \mathbf{x}_t' \beta + u_t$$

where $y_t = z_{1t}$, $\mathbf{x}_t = (z_{2t}, \dots, z_{kt})'$, and $\beta = (\beta_2, \dots, \beta_k)'$. This regression can also include an intercept or an intercept with a linear trend. The residuals are used to test for the existence of an autoregressive unit root. Engle and Granger (1987) proposed augmented Dickey-Fuller type regression without an intercept on the residuals to test the unit root. When the first step OLS does not include an intercept, the asymptotic distribution of the ADF test statistic DF_τ is given by

$$\begin{aligned} DF_\tau &\Rightarrow \int_0^1 \frac{Q(r)}{(\int_0^1 Q^2)^{1/2}} dS \\ Q(r) &= W_1(r) - \int_0^1 W_1 W_2' \left(\int_0^1 W_2 W_2' \right)^{-1} W_2(r) \\ S(r) &= \frac{Q(r)}{(\kappa' \kappa)^{1/2}} \\ \kappa' &= \left(1, - \int_0^1 W_1 W_2' \left(\int_0^1 W_2 W_2' \right)^{-1} \right) \end{aligned}$$

where $W(r)$ is a k vector standard Brownian motion and

$$W(r) = \begin{pmatrix} W_1(r), W_2(r) \end{pmatrix}$$

is a partition such that $W_1(r)$ is a scalar and $W_2(r)$ is $k - 1$ dimensional. The asymptotic distributions of the test statistics in the other two cases have the same form as the preceding formula. If the first step regression includes an intercept, then $W(r)$ is replaced by the demeaned Brownian motion $\bar{W}(r) = W(r) - \int_0^1 W(r) dr$. If the first step regression includes a time trend, then $W(r)$ is replaced by the detrended Brownian motion. The critical values of the asymptotic distributions are tabulated in Phillips and Ouliaris (1990) and MacKinnon (1991).

The residual based cointegration tests have a major shortcoming. Different choices of the dependent variable in the first step OLS might produce contradictory results. This can be explained theoretically. If the dependent variable is in the cointegration relationship, then the test is consistent against the alternative that there is cointegration. On the other hand, if the dependent variable is not in the cointegration system, the OLS residual $y_t - \mathbf{x}_t' \beta$ do not converge to a stationary process. Changing the dependent variable is more likely to produce conflicting results in finite samples.

Phillips-Perron Unit Root and Cointegration Testing

Besides the ADF test, there is another popular unit root test that is valid under general serial correlation and heteroscedasticity, developed by Phillips (1997) and Phillips and Perron (1988). The tests are constructed using the AR(1) type regressions, unlike ADF tests, with corrected estimation of the long run variance of Δy_t . In the case without intercept, consider the driftless random walk process

$$y_t = y_{t-1} + u_t$$

where the disturbances might be serially correlated with possible heteroscedasticity. Phillips and Perron (1988) proposed the unit root test of the OLS regression model,

$$y_t = \rho y_{t-1} + u_t$$

Denote the OLS residual by \hat{u}_t . The asymptotic variance of $\frac{1}{T} \sum_{t=1}^T \hat{u}_t^2$ can be estimated by using the truncation lag l .

$$\hat{\lambda} = \sum_{j=0}^l \kappa_j [1 - j/(l+1)] \hat{\gamma}_j$$

where $\kappa_0 = 1$, $\kappa_j = 2$ for $j > 0$, and $\hat{\gamma}_j = \frac{1}{T} \sum_{t=j+1}^T \hat{u}_t \hat{u}_{t-j}$. This is a consistent estimator suggested by Newey and West (1987).

The variance of u_t can be estimated by $s^2 = \frac{1}{T-k} \sum_{t=1}^T \hat{u}_t^2$. Let $\hat{\sigma}^2$ be the variance estimate of the OLS estimator $\hat{\rho}$. Then the Phillips-Perron \hat{Z}_ρ test (zero mean case) is written

$$\hat{Z}_\rho = T(\hat{\rho} - 1) - \frac{1}{2} T^2 \hat{\sigma}^2 (\hat{\lambda} - \hat{\gamma}_0) / s^2$$

The \hat{Z}_ρ statistic is just the ordinary Dickey-Fuller \hat{Z}_α statistic with a correction term that accounts for the serial correlation. The correction term goes to zero asymptotically if there is no serial correlation.

Note that $P(\hat{\rho} < 1) \approx 0.68$ as $T \rightarrow \infty$, which shows that the limiting distribution is skewed to the left.

Let τ_ρ be the τ statistic for $\hat{\rho}$. The Phillips-Perron \hat{Z}_t (defined here as \hat{Z}_τ) test is written

$$\hat{Z}_\tau = (\hat{\gamma}_0 / \hat{\lambda})^{1/2} t_{\hat{\rho}} - \frac{1}{2} T \hat{\sigma} (\hat{\lambda} - \hat{\gamma}_0) / (s \hat{\lambda}^{1/2})$$

To incorporate a constant intercept, the regression model $y_t = \mu + \rho y_{t-1} + u_t$ is used (single mean case) and null hypothesis the series is a driftless random walk with nonzero unconditional mean. To incorporate a time trend, we used the regression model $y_t = \mu + \delta t + \rho y_{t-1} + u_t$ and under the null the series is a random walk with drift.

The limiting distributions of the test statistics for the zero mean case are

$$\begin{aligned} \hat{Z}_\rho &\Rightarrow \frac{\frac{1}{2} \{B(1)^2 - 1\}}{\int_0^1 [B(s)]^2 ds} \\ \hat{Z}_\tau &\Rightarrow \frac{\frac{1}{2} \{[B(1)]^2 - 1\}}{\{\int_0^1 [B(x)]^2 dx\}^{1/2}} \end{aligned}$$

where $B(\cdot)$ is a standard Brownian motion.

The limiting distributions of the test statistics for the intercept case are

$$\hat{Z}_\rho \Rightarrow \frac{\frac{1}{2}\{[B(1)]^2 - 1\} - B(1) \int_0^1 B(x)dx}{\int_0^1 [B(x)]^2 dx - \left[\int_0^1 B(x)dx \right]^2}$$

$$\hat{Z}_\tau \Rightarrow \frac{\frac{1}{2}\{[B(1)]^2 - 1\} - B(1) \int_0^1 B(x)dx}{\left\{ \int_0^1 [B(x)]^2 dx - \left[\int_0^1 B(x)dx \right]^2 \right\}^{1/2}}$$

Finally, The limiting distributions of the test statistics for the trend case are can be derived as

$$\begin{bmatrix} 0 & c & 0 \end{bmatrix} V^{-1} \begin{bmatrix} B(1) \\ (B(1)^2 - 1)/2 \\ B(1) - \int_0^1 B(x)dx \end{bmatrix}$$

where $c = 1$ for \hat{Z}_ρ and $c = \frac{1}{\sqrt{Q}}$ for \hat{Z}_τ ,

$$V = \begin{bmatrix} 1 & \int_0^1 B(x)dx & 1/2 \\ \int_0^1 B(x)dx & \int_0^1 [B(x)]^2 dx & \int_0^1 xB(x)dx \\ 1/2 & \int_0^1 xB(x)dx & 1/3 \end{bmatrix}$$

$$Q = \begin{bmatrix} 0 & c & 0 \end{bmatrix} V^{-1} \begin{bmatrix} 0 & c & 0 \end{bmatrix}^T$$

The finite sample performance of the PP test is not satisfactory (see Hayashi (2000)).

When several variables $\mathbf{z}_t = (z_{1t}, \dots, z_{kt})'$ are cointegrated, there exists a $(k \times 1)$ cointegrating vector \mathbf{c} such that $\mathbf{c}'\mathbf{z}_t$ is stationary and \mathbf{c} is a nonzero vector. The residual based cointegration test assumes the following regression model:

$$y_t = \beta_1 + \mathbf{x}_t' \beta + u_t$$

where $y_t = z_{1t}$, $\mathbf{x}_t = (z_{2t}, \dots, z_{kt})'$, and $\beta = (\beta_2, \dots, \beta_k)'$. You can estimate the consistent cointegrating vector by using OLS if all variables are difference stationary — that is, $I(1)$. The estimated cointegrating vector is $\hat{\mathbf{c}} = (1, -\hat{\beta}_2, \dots, -\hat{\beta}_k)'$. The Phillips-Ouliaris test is computed using the OLS residuals from the preceding regression model, and it uses the PP unit root tests \hat{Z}_ρ and \hat{Z}_τ developed in Phillips (1997), although in Phillips and Ouliaris (1990) the asymptotic distributions of some other leading unit root tests are also derived. The null hypothesis is no cointegration.

You need to refer to the tables by Phillips and Ouliaris (1990) to obtain the p -value of the cointegration test. Before you apply the cointegration test, you may want to perform the unit root test for each variable (see the option **STATIONARITY=(ADF)**).

As in the Engle-Granger cointegration tests, the Phillips-Ouliaris test can give conflicting results for different choices of the regressand. There are other cointegration tests that are invariant to the order of the variables, including Johansen (1988), Johansen (1991), Stock and Watson (1988).

ERS and Ng-Perron Unit Root Tests (Experimental)

As mentioned earlier, ADF and PP both suffer severe size distortion and low power. There is a class of newer tests that improves both size and power, sometimes called efficient unit root tests, among which Elliott, Rothenberg, and Stock (1996) and Ng and Perron (2001) are prominent.

Elliott, Rothenberg, and Stock (1996) consider the data generating process

$$y_t = \beta' z_t + u_t$$

$$u_t = \alpha u_{t-1} + v_t, t = 1, \dots, T$$

where $\{z_t\}$ is either $\{t\}$ or $\{(1, t)\}$ and $\{v_t\}$ is an unobserved stationary zero-mean process with positive spectral density at zero frequency. The null hypothesis is $H_0 : \alpha = 1$, and the alternative is $H_a : |\alpha| < 1$. The key idea of Elliott, Rothenberg, and Stock (1996) is to study the asymptotic power and asymptotic power envelope of some new tests. Asymptotic power is defined with a sequence of local alternatives. For a fixed alternative hypothesis, the power of a test usually goes to one when sample size goes to infinity; however, this does not say anything about the finite sample performance. On the other hand, when the data generating process under the alternative moves closer to the null as the sample size increases, the power does not necessarily converge to one. The local to unity alternatives in ERS are

$$\alpha = 1 + \frac{c}{T}$$

and the power against the local alternatives has a limit as T goes to infinity, which is called asymptotic power. This value is strictly between 0 and 1. Asymptotic power indicates the adequacy of a test to distinguish small deviations from the null hypothesis.

Define

$$y_\alpha = (y_1, (1 - \alpha L)y_2, \dots, (1 - \alpha L)y_T)$$

$$z_\alpha = (z_1, (1 - \alpha L)z_2, \dots, (1 - \alpha L)z_T)$$

Let $S(\alpha)$ be the sum of squared residuals from a least squares regression of y_α on z_α . Then the *point optimal test* against the local alternative $\bar{\alpha} = 1 + \bar{c}/T$ has the form

$$P_T^{GLS} = \frac{S(\bar{\alpha}) - \bar{\alpha}S(1)}{\hat{\omega}^2}$$

where $\hat{\omega}^2$ is an estimator for $\omega^2 = \sum_{k=-\infty}^{\infty} E v_t v_{t-k}$. Note that the test rejects the null when P_T is small. The asymptotic power function for the point optimal test constructed with \bar{c} under local alternatives with c is denoted by $\pi(c, \bar{c})$. Then the power envelope is $\pi(c, c)$ because the test formed with \bar{c} is the most powerful against the alternative $c = \bar{c}$. In other words, the asymptotic function $\pi(c, \bar{c})$, is always below the power envelope $\pi(c)$ except that at one point $c = \bar{c}$ they are tangent. Elliott, Rothenberg, and Stock (1996) show that choosing some specific values for \bar{c} can cause the asymptotic power function $\pi(c, \bar{c})$ of the point optimal test to be very close to the power envelope. The optimal \bar{c} is -7 when $z_t = 1$, and -13.5 when $z_t = (1, t)$. This choice of \bar{c} corresponds to the tangent point where $\pi = 0.5$. This is also true for the DF-GLS test.

Elliott, Rothenberg, and Stock (1996) also propose the *DF-GLS test*, given by the t statistic for testing $\psi_0 = 0$ in the regression

$$\Delta y_t^d = \psi_0 y_{t-1}^d + \sum_{j=1}^p \psi_j \Delta y_{t-j}^d + \epsilon_{tp}$$

where y_t^d is obtained in a first step detrending

$$y_t^d = y_t - \hat{\beta}'_{\alpha} z_t$$

and $\hat{\beta}_{\alpha}$ is least squares regression coefficient of y_{α} on z_{α} . Regarding the lag length selection, Elliott, Rothenberg, and Stock (1996) favor the Schwartz Bayesian information criterion. The optimal selection of the lag length p and the estimation of ω^2 is further discussed in Ng and Perron (2001). The lag length is selected from the interval $[0, p_{max}]$ for some fixed p_{max} by using the modified Akaike's information criterion,

$$MAIC(p) = \log(\hat{\sigma}_p^2) + \frac{2(\tau_T(p) + p)}{T - p_{max}}$$

where $\tau_T(p) = (\hat{\sigma}_p^2)^{-1} \hat{\psi}_0^2 \sum_{t=p_{max}+1}^T (y_{t-1}^d)^2$ and $\hat{\sigma}_p^2 = (T - p_{max})^{-1} \sum_{t=p_{max}+1}^T \hat{\epsilon}_{tp}^2$. For fixed lag length p , an estimate of ω^2 is given by

$$\hat{\omega}^2 = \frac{(T - p)^{-1} \sum_{t=p+1}^T \hat{\epsilon}_{tp}^2}{\left(1 - \sum_{j=1}^p \hat{\psi}_j\right)^2}$$

DF-GLS is indeed a superior unit root test, according to Stock (1994), Schwert (1989), and Elliott, Rothenberg, and Stock (1996). In terms of the size of the test, DF-GLS is almost as good as the ADF t test DF_{τ} and better than the PP \hat{Z}_{ρ} and \hat{Z}_{τ} test. In addition, the power of the DF-GLS is larger than the ADF t test and ρ -test.

Ng and Perron (2001) also apply GLS detrending to obtain the following M-tests:

$$\begin{aligned} MZ_{\alpha} &= (T^{-1}(y_T^d)^2 - \hat{\lambda}^2) - \left(2T^{-2} \sum_{t=1}^T (y_{t-1}^d)^2\right)^{-1} \\ MSB &= \left(\frac{\sum_{t=1}^T (y_{t-1}^d)^2}{T^2 \hat{\omega}^2}\right)^{1/2} \\ MZ_t &= MZ_{\alpha} \times MSB \end{aligned}$$

The first one is a modified version of Phillips-Perron Z_{ρ} test

$$MZ_{\rho} = Z_{\rho} + \frac{T}{2}(\hat{\alpha} - 1)^2$$

where the detrended data $\{y_t^d\}$ is used. The second is a modified Bhargava (1986) R_1 test statistic. The third can be perceived as a modified Phillips-Perron Z_{τ} statistic because of the relationship $Z_{\tau} = MSB \times Z_{\rho}$.

The modified point optimal tests using the GLS detrended data are

$$\begin{aligned} MP_T^{GLS} &= \frac{\bar{c}T^{-2} \sum_{t=1}^T (y_{t-1}^d)^2 - \bar{c}T^{-1} (y_T^d)^2}{\hat{\omega}^2} & \text{for } z_t = 1 \\ MP_T^{GLS} &= \frac{\bar{c}T^{-2} \sum_{t=1}^T (y_{t-1}^d)^2 - (1 - \bar{c})T^{-1} (y_T^d)^2}{\hat{\omega}^2} & \text{for } z_t = (1, t) \end{aligned}$$

The DF-GLS test and the MZ_t test have the same limiting distribution

$$\begin{aligned} \text{DF-GLS} &\approx MZ_t \Rightarrow 0.5 \frac{(J_c(1)^2 - 1)}{\left(\int_0^1 J_c(r)^2 dr\right)^{1/2}} \quad \text{for } z_t = 1 \\ \text{DF-GLS} &\approx MZ_t \Rightarrow 0.5 \frac{(V_{c,\bar{c}}(1)^2 - 1)}{\left(\int_0^1 V_{c,\bar{c}}(r)^2 dr\right)^{1/2}} \quad \text{for } z_t = (1, t) \end{aligned}$$

The point optimal test and the modified point optimal test have the same limiting distribution

$$\begin{aligned} P_T^{GLS} &\approx MP_T^{GLS} \Rightarrow \bar{c}^2 \int_0^1 J_c(r)^2 dr - \bar{c} J_c(1)^2 \quad \text{for } z_t = 1 \\ P_T^{GLS} &\approx MP_T^{GLS} \Rightarrow \bar{c}^2 \int_0^1 V_{c,\bar{c}}(r)^2 dr + (1 - \bar{c}) V_{c,\bar{c}}(1)^2 \quad \text{for } z_t = (1, t) \end{aligned}$$

where $W(r)$ is a standard Brownian motion and $J_c(r)$ is an Ornstein-Uhlenbeck process defined by $dJ_c(r) = c J_c(r) dr + dW(r)$ with $J_c(0) = 0$, $V_{c,\bar{c}}(r) = J_c(r) - r \left[\lambda J_c(1) + 3(1 - \lambda) \int_0^1 s J_c(s) ds \right]$, and $\lambda = (1 - \bar{c}) / (1 - \bar{c} + \bar{c}^2/3)$.

Overall, the M-tests has the smallest size distortion, with the ADF t test having the next smallest. The ADF ρ -test, \hat{Z}_ρ , and \hat{Z}_τ have the worst size distortion. In addition, the power of the DF-GLS and M-tests are larger than that of the ADF t test and ρ -test. The ADF \hat{Z}_ρ has more severe size distortion than the ADF \hat{Z}_τ , but larger power for a fixed lag length.

Kwiatkowski, Phillips, Schmidt, and Shin (KPSS) Unit Root Test

There are less existent tests for the null hypothesis of trend stationary $I(0)$. The main reason is the difficulty in the theoretical development. The KPSS test was introduced in Kwiatkowski et al. (1992) to test the null hypothesis that an observable series is stationary around a deterministic trend. Please note, that for consistency reasons, the notation used here is different from the notation used in the original paper. The setup of the problem is as follows: it is assumed that the series is expressed as the sum of the deterministic trend, random walk r_t , and stationary error u_t ; that is,

$$\begin{aligned} y_t &= \mu + \delta t + r_t + u_t \\ r_t &= r_{t-1} + e_t \end{aligned}$$

where $e_t \sim \text{iid}(0, \sigma_e^2)$, and an intercept μ (in the original paper, the authors use r_0 instead of μ , here we assume $r_0 = 0$.) The null hypothesis of trend stationary is specified by $H_0 : \sigma_e^2 = 0$, while the null of level stationary is the same as above with the model restriction $\delta = 0$. Under the alternative that $\sigma_e^2 \neq 0$, there is a random walk component in the observed series y_t .

Under stronger assumptions of normality and iid of u_t and e_t , a one-sided LM test of the null that there is no random walk ($e_t = 0, \forall t$) can be constructed as follows:

$$\begin{aligned} \widehat{LM} &= \frac{1}{T^2} \sum_{t=1}^T \frac{S_t^2}{s^2(l)} \\ s^2(l) &= \frac{1}{T} \sum_{t=1}^T \hat{u}_t^2 + \frac{2}{T} \sum_{s=1}^l w(s, l) \sum_{t=s+1}^T \hat{u}_t \hat{u}_{t-s} \\ S_t &= \sum_{\tau=1}^t \hat{u}_\tau \end{aligned}$$

Notice that under the null hypothesis, \hat{u}_t can be estimated by ordinary least squares regression of y_t on an intercept and the time trend. Following the original work of Kwiatkowski, Phillips, Schmidt, and Shin, under the null ($\sigma_e^2 = 0$), \widehat{LM} statistic converges asymptotically to three different distributions depending on whether the model is trend-stationary, level-stationary ($\delta = 0$), or zero-mean stationary ($\delta = 0, \mu = 0$). The trend-stationary model is denoted by subscript τ and the level-stationary model is denoted by subscript μ . The case when there is no trend and zero intercept is denoted as 0. The last case, although rarely used in practice, is considered in Hobijn, Franses, and Ooms (2004).

$$\begin{aligned} y_t = u_t : \quad \widehat{LM}_0 &\xrightarrow{D} \int_0^1 B^2(r) dr \\ y_t = \mu + u_t : \quad \widehat{LM}_\mu &\xrightarrow{D} \int_0^1 V^2(r) dr \\ y_t = \mu + \delta t + u_t : \quad \widehat{LM}_\tau &\xrightarrow{D} \int_0^1 V_2^2(r) dr \end{aligned}$$

with

$$V(r) = B(r) - rB(1)$$

$$V_2(r) = B(r) + (2r - 3r^2)B(1) + (-6r + 6r^2) \int_0^1 B(s) ds$$

where $B(r)$ is a Brownian motion (Wiener process), and \xrightarrow{D} is convergence in distribution. Note that $V(r)$ is a standard Brownian bridge, $V_2(r)$ is a Brownian bridge of a second-level.

Using the notation of Kwiatkowski et al. (1992) the \widehat{LM} statistic is named as $\hat{\eta}$. This test depends on the computational method used to compute the long-run variance $s(l)$ — that is, the window width l and the kernel type $w(\cdot, \cdot)$. You can specify the kernel used in the test, using the **KERNEL** option:

- Newey-West/Bartlett (**KERNEL**=NW | BART), default

$$w(s, l) = 1 - \frac{s}{l + 1}$$

- Quadratic spectral (**KERNEL**=QS)

$$w(s, l) = \tilde{w}\left(\frac{s}{l}\right) = \tilde{w}(x) = \frac{25}{12\pi^2 x^2} \left(\frac{\sin(6\pi x/5)}{6\pi x/5} - \cos\left(\frac{6}{5}\pi x\right) \right)$$

You can specify the number of lags, l , in three different ways:

- Schwert (**SCHW** = c) (default for NW, c=4)

$$l = \text{floor} \left\{ c \left(\frac{T}{100} \right)^{1/4} \right\}$$

- Manual (**LAG** = l)
- Automatic selection (**AUTO**) (default for QS) Hobijn, Franses, and Ooms (2004)

The last option (AUTO) needs more explanation, summarized in the following table. For each of the kernel function, a formula for optimal window width l is provided.

NW Kernel	QS Kernel
$l = \min(T, \text{floor}(\hat{\gamma} T^{1/3}))$ where T is the number of observations,	$l = \min(T, \text{floor}(\hat{\gamma} T^{1/5}))$
$\hat{\gamma} = 1.1447 \left\{ \left(\frac{\hat{s}^{(1)}}{\hat{s}^{(0)}} \right)^2 \right\}^{1/3}$	$\hat{\gamma} = 1.3221 \left\{ \left(\frac{\hat{s}^{(2)}}{\hat{s}^{(0)}} \right)^2 \right\}^{1/5}$
$\hat{s}^{(j)} = \delta_{0,j} \hat{\gamma}_0 + 2 \sum_{i=1}^n i^j \hat{\gamma}_i$	
$n = \text{floor}(T^{2/9})$	$n = \text{floor}(T^{2/25})$

where $\delta_{0,j} = 1$ if $j = 0$ and 0, otherwise; $\hat{\gamma}_i = \frac{1}{T} \sum_{t=1}^{T-i} u_t u_{t+i}$.

Simulation evidence shows that the KPSS has size distortion in finite samples. For example, see Caner and Kilian (2001). The power is reduced when the sample size is large, which can be derived theoretically (see Breitung (1995)). Another problem of the KPSS test is that the power depends on the choice of the truncation lag used in the Newey-West estimator of the long run variance $s^2(l)$.

Testing for Statistical Independence

Independence tests are widely used in model selection, residual analysis, and model diagnostics because models are usually based on the assumption of independently distributed errors. If a given time series (for example, a series of residuals) is independent, then no deterministic model is necessary for this completely random process; otherwise, there must exist some relationship in the series to be addressed. In the following section, four independence tests are introduced: the BDS test, the runs test, the turning point test, and the rank version of von Neumann ratio test.

BDS Test

Broock, Dechert, and Scheinkman (1987) propose a test (BDS test) of independence based on the correlation dimension. Broock et al. (1996) show that the first-order asymptotic distribution of the test statistic is independent of the estimation error provided that the parameters of the model under test can be estimated \sqrt{n} -consistently. Hence, the BDS test can be used as a model selection tool and as a specification test.

Given the sample size T , the embedding dimension m , and the value of the radius r , the BDS statistic is

$$S_{\text{BDS}}(T, m, r) = \sqrt{T - m + 1} \frac{c_{m,m,T}(r) - c_{1,m,T}^m(r)}{\sigma_{m,T}(r)}$$

where

$$\begin{aligned}
 c_{m,n,N}(r) &= \frac{2}{(N-n+1)(N-n)} \sum_{s=n}^N \sum_{t=s+1}^N \prod_{j=0}^{m-1} I_r(z_{s-j}, z_{t-j}) \\
 I_r(z_s, z_t) &= \begin{cases} 1 & \text{if } |z_s - z_t| < r \\ 0 & \text{otherwise} \end{cases} \\
 \sigma_{m,T}^2(r) &= 4 \left(k^m + 2 \sum_{j=1}^{m-1} k^{m-j} c^{2j} + (m-1)^2 c^{2m} - m^2 k c^{2m-2} \right) \\
 c &= c_{1,1,T}(r) \\
 k &= k_T(r) = \frac{6}{T(T-1)(T-2)} \sum_{t=1}^T \sum_{s=t+1}^T \sum_{l=s+1}^T h_r(z_t, z_s, z_l) \\
 h_r(z_t, z_s, z_l) &= \frac{1}{3} (I_r(z_t, z_s)I_r(z_s, z_l) + I_r(z_t, z_l)I_r(z_l, z_s) + I_r(z_s, z_t)I_r(z_t, z_l))
 \end{aligned}$$

The statistic has a standard normal distribution if the sample size is large enough. For small sample size, the distribution can be approximately obtained through simulation. Kanzler (1999) has a comprehensive discussion on the implementation and empirical performance of BDS test.

Runs Test and Turning Point Test

The runs test and turning point test are two widely used tests for independence (Cromwell, Labys, and Terraza 1994).

The runs test needs several steps. First, convert the original time series into the sequence of signs, $\{+ + - - \dots + - - -\}$, that is, map $\{z_t\}$ into $\{\text{sign}(z_t - z_M)\}$ where z_M is the sample mean of z_t and $\text{sign}(x)$ is “+” if x is nonnegative and “−” if x is negative. Second, count the number of runs, R , in the sequence. A run of a sequence is a maximal non-empty segment of the sequence that consists of adjacent equal elements. For example, the following sequence contains $R = 8$ runs:

$$\underbrace{+++}_{1} \underbrace{---}_{1} \underbrace{++}_{1} \underbrace{--}_{1} \underbrace{+}_{1} \underbrace{-}_{1} \underbrace{++++}_{1} \underbrace{--}_{1}$$

Third, count the number of pluses and minuses in the sequence and denote them as N_+ and N_- , respectively. In the preceding example sequence, $N_+ = 11$ and $N_- = 8$. Note that the sample size $T = N_+ + N_-$. Finally, compute the statistic of runs test,

$$S_{\text{runs}} = \frac{R - \mu}{\sigma}$$

where

$$\begin{aligned}
 \mu &= \frac{2N_+N_-}{T} + 1 \\
 \sigma^2 &= \frac{(\mu - 1)(\mu - 2)}{T - 1}
 \end{aligned}$$

The statistic of the turning point test is defined as follows:

$$S_{TP} = \frac{\sum_{t=2}^{T-1} TP_t - 2(T-2)/3}{\sqrt{(16T-29)/90}}$$

where the indicator function of the turning point TP_t is 1 if $z_t > z_{t\pm 1}$ or $z_t < z_{t\pm 1}$ (that is, both the previous and next values are greater or less than the current value); otherwise, 0.

The statistics of both the runs test and the turning point test have the standard normal distribution under the null hypothesis of independence.

Rank Version of von Neumann Ratio Test

Since the runs test completely ignores the magnitudes of the observations, Bartels (1982) proposes a rank version of the von Neumann Ratio test for independence:

$$S_{RVN} = \frac{\sqrt{T}}{2} \left(\frac{\sum_{t=1}^{T-1} (R_{t+1} - R_t)^2}{(T(T^2 - 1)/12)} - 2 \right)$$

where R_t is the rank of t th observation in the sequence of T observations. For large sample, the statistic follows the standard normal distribution under the null hypothesis of independence. For small samples of size between 11 and 100, the critical values through simulation would be more precise; for samples of size no more than 10, the exact CDF is applied.

Testing for Normality

Based on skewness and kurtosis, Jarque and Bera (1980) calculated the test statistic

$$T_N = \left[\frac{N}{6} b_1^2 + \frac{N}{24} (b_2 - 3)^2 \right]$$

where

$$b_1 = \frac{\sqrt{N} \sum_{t=1}^N \hat{u}_t^3}{\left(\sum_{t=1}^N \hat{u}_t^2 \right)^{\frac{3}{2}}}$$

$$b_2 = \frac{N \sum_{t=1}^N \hat{u}_t^4}{\left(\sum_{t=1}^N \hat{u}_t^2 \right)^2}$$

The $\chi^2(2)$ distribution gives an approximation to the normality test T_N .

When the GARCH model is estimated, the normality test is obtained using the standardized residuals $\hat{u}_t = \hat{\epsilon}_t / \sqrt{\hat{h}_t}$. The normality test can be used to detect misspecification of the family of ARCH models.

Testing for Linear Dependence

Generalized Durbin-Watson Tests

Consider the following linear regression model:

$$\mathbf{Y} = \mathbf{X}\boldsymbol{\beta} + \boldsymbol{\nu}$$

where \mathbf{X} is an $N \times k$ data matrix, $\boldsymbol{\beta}$ is a $k \times 1$ coefficient vector, and $\boldsymbol{\nu}$ is a $N \times 1$ disturbance vector. The error term $\boldsymbol{\nu}$ is assumed to be generated by the j th-order autoregressive process $\nu_t = \epsilon_t - \varphi_j \nu_{t-j}$ where $|\varphi_j| < 1$, ϵ_t is a sequence of independent normal error terms with mean 0 and variance σ^2 . Usually, the Durbin-Watson statistic is used to test the null hypothesis $H_0 : \varphi_1 = 0$ against $H_1 : -\varphi_1 > 0$. Vinod (1973) generalized the Durbin-Watson statistic:

$$d_j = \frac{\sum_{t=j+1}^N (\hat{\nu}_t - \hat{\nu}_{t-j})^2}{\sum_{t=1}^N \hat{\nu}_t^2}$$

where $\hat{\nu}$ are OLS residuals. Using the matrix notation,

$$d_j = \frac{\mathbf{Y}'\mathbf{M}\mathbf{A}'_j\mathbf{A}_j\mathbf{M}\mathbf{Y}}{\mathbf{Y}'\mathbf{M}\mathbf{Y}}$$

where $\mathbf{M} = \mathbf{I}_N - \mathbf{X}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'$ and \mathbf{A}_j is a $(N - j) \times N$ matrix:

$$\mathbf{A}_j = \begin{bmatrix} -1 & 0 & \cdots & 0 & 1 & 0 & \cdots & 0 \\ 0 & -1 & 0 & \cdots & 0 & 1 & 0 & \cdots \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \cdots & 0 & -1 & 0 & \cdots & 0 & 1 \end{bmatrix}$$

and there are $j - 1$ zeros between -1 and 1 in each row of matrix \mathbf{A}_j .

The QR factorization of the design matrix \mathbf{X} yields a $N \times N$ orthogonal matrix \mathbf{Q} :

$$\mathbf{X} = \mathbf{Q}\mathbf{R}$$

where \mathbf{R} is an $N \times k$ upper triangular matrix. There exists an $N \times (N - k)$ submatrix of \mathbf{Q} such that $\mathbf{Q}_1\mathbf{Q}'_1 = \mathbf{M}$ and $\mathbf{Q}'_1\mathbf{Q}_1 = \mathbf{I}_{N-k}$. Consequently, the generalized Durbin-Watson statistic is stated as a ratio of two quadratic forms:

$$d_j = \frac{\sum_{l=1}^n \lambda_{jl} \xi_l^2}{\sum_{l=1}^n \xi_l^2}$$

where $\lambda_{j1} \dots \lambda_{jn}$ are upper n eigenvalues of $\mathbf{M}\mathbf{A}'_j\mathbf{A}_j\mathbf{M}$ and ξ_l is a standard normal variate, and $n = \min(N - k, N - j)$. These eigenvalues are obtained by a singular value decomposition of $\mathbf{Q}'_1\mathbf{A}'_j$ (Golub and Van Loan 1989; Savin and White 1978).

The marginal probability (or p -value) for d_j given c_0 is

$$\text{Prob}\left(\frac{\sum_{l=1}^n \lambda_{jl} \xi_l^2}{\sum_{l=1}^n \xi_l^2} < c_0\right) = \text{Prob}(q_j < 0)$$

where

$$q_j = \sum_{l=1}^n (\lambda_{jl} - c_0) \xi_l^2$$

When the null hypothesis $H_0 : \varphi_j = 0$ holds, the quadratic form q_j has the characteristic function

$$\phi_j(t) = \prod_{l=1}^n (1 - 2(\lambda_{jl} - c_0)it)^{-1/2}$$

The distribution function is uniquely determined by this characteristic function:

$$F(x) = \frac{1}{2} + \frac{1}{2\pi} \int_0^\infty \frac{e^{itx} \phi_j(-t) - e^{-itx} \phi_j(t)}{it} dt$$

For example, to test $H_0 : \varphi_4 = 0$ given $\varphi_1 = \varphi_2 = \varphi_3 = 0$ against $H_1 : -\varphi_4 > 0$, the marginal probability (p -value) can be used:

$$F(0) = \frac{1}{2} + \frac{1}{2\pi} \int_0^\infty \frac{(\phi_4(-t) - \phi_4(t))}{it} dt$$

where

$$\phi_4(t) = \prod_{l=1}^n (1 - 2(\lambda_{4l} - \hat{d}_4)it)^{-1/2}$$

and \hat{d}_4 is the calculated value of the fourth-order Durbin-Watson statistic.

In the Durbin-Watson test, the marginal probability indicates positive autocorrelation ($-\varphi_j > 0$) if it is less than the level of significance (α), while you can conclude that a negative autocorrelation ($-\varphi_j < 0$) exists if the marginal probability based on the computed Durbin-Watson statistic is greater than $1 - \alpha$. Wallis (1972) presented tables for bounds tests of fourth-order autocorrelation, and Vinod (1973) has given tables for a 5% significance level for orders two to four. Using the AUTOREG procedure, you can calculate the exact p -values for the general order of Durbin-Watson test statistics. Tests for the absence of autocorrelation of order p can be performed sequentially; at the j th step, test $H_0 : \varphi_j = 0$ given $\varphi_1 = \dots = \varphi_{j-1} = 0$ against $\varphi_j \neq 0$. However, the size of the sequential test is not known.

The Durbin-Watson statistic is computed from the OLS residuals, while that of the autoregressive error model uses residuals that are the difference between the predicted values and the actual values. When you use the Durbin-Watson test from the residuals of the autoregressive error model, you must be aware that this test is only an approximation. See “[Autoregressive Error Model](#)” on page 365 earlier in this chapter. If there are missing values, the Durbin-Watson statistic is computed using all the nonmissing values and ignoring the gaps caused by missing residuals. This does not affect the significance level of the resulting test, although the power of the test against certain alternatives may be adversely affected. Savin and White (1978) have examined the use of the Durbin-Watson statistic with missing values.

The Durbin-Watson probability calculations have been enhanced to compute the p -value of the generalized Durbin-Watson statistic for large sample sizes. Previously, the Durbin-Watson probabilities were only calculated for small sample sizes.

Consider the following linear regression model:

$$\mathbf{Y} = \mathbf{X}\beta + \mathbf{u}$$

$$u_t + \phi_j u_{t-j} = \epsilon_t, \quad t = 1, \dots, N$$

where \mathbf{X} is an $N \times k$ data matrix, β is a $k \times 1$ coefficient vector, \mathbf{u} is a $N \times 1$ disturbance vector, and ϵ_t is a sequence of independent normal error terms with mean 0 and variance σ^2 .

The generalized Durbin-Watson statistic is written as

$$DW_j = \frac{\hat{\mathbf{u}}' \mathbf{A}_j' \mathbf{A}_j \hat{\mathbf{u}}}{\hat{\mathbf{u}}' \hat{\mathbf{u}}}$$

where $\hat{\mathbf{u}}$ is a vector of OLS residuals and \mathbf{A}_j is a $(T - j) \times T$ matrix. The generalized Durbin-Watson statistic DW_j can be rewritten as

$$DW_j = \frac{\mathbf{Y}' \mathbf{M} \mathbf{A}_j' \mathbf{A}_j \mathbf{M} \mathbf{Y}}{\mathbf{Y}' \mathbf{M} \mathbf{Y}} = \frac{\eta' (\mathbf{Q}_1' \mathbf{A}_j' \mathbf{A}_j \mathbf{Q}_1) \eta}{\eta' \eta}$$

where $\mathbf{Q}_1' \mathbf{Q}_1 = \mathbf{I}_{T-k}$, $\mathbf{Q}_1' \mathbf{X} = 0$, and $\eta = \mathbf{Q}_1' \mathbf{u}$.

The marginal probability for the Durbin-Watson statistic is

$$\Pr(DW_j < c) = \Pr(h < 0)$$

where $h = \eta' (\mathbf{Q}_1' \mathbf{A}_j' \mathbf{A}_j \mathbf{Q}_1 - c \mathbf{I}) \eta$.

The p -value or the marginal probability for the generalized Durbin-Watson statistic is computed by numerical inversion of the characteristic function $\phi(u)$ of the quadratic form $h = \eta' (\mathbf{Q}_1' \mathbf{A}_j' \mathbf{A}_j \mathbf{Q}_1 - c \mathbf{I}) \eta$. The trapezoidal rule approximation to the marginal probability $\Pr(h < 0)$ is

$$\Pr(h < 0) = \frac{1}{2} - \sum_{k=0}^K \frac{\text{Im}[\phi((k + \frac{1}{2})\Delta)]}{\pi(k + \frac{1}{2})} + E_I(\Delta) + E_T(K)$$

where $\text{Im}[\phi(\cdot)]$ is the imaginary part of the characteristic function, $E_I(\Delta)$ and $E_T(K)$ are integration and truncation errors, respectively. Refer to Davies (1973) for numerical inversion of the characteristic function.

Ansley, Kohn, and Shively (1992) proposed a numerically efficient algorithm that requires $O(N)$ operations for evaluation of the characteristic function $\phi(u)$. The characteristic function is denoted as

$$\begin{aligned} \phi(u) &= \left| \mathbf{I} - 2iu(\mathbf{Q}_1' \mathbf{A}_j' \mathbf{A}_j \mathbf{Q}_1 - c \mathbf{I}_{N-k}) \right|^{-1/2} \\ &= |\mathbf{V}|^{-1/2} |\mathbf{X}' \mathbf{V}^{-1} \mathbf{X}|^{-1/2} |\mathbf{X}' \mathbf{X}|^{1/2} \end{aligned}$$

where $\mathbf{V} = (1 + 2iuc)\mathbf{I} - 2iu\mathbf{A}_j' \mathbf{A}_j$ and $i = \sqrt{-1}$. By applying the Cholesky decomposition to the complex matrix \mathbf{V} , you can obtain the lower triangular matrix \mathbf{G} that satisfies $\mathbf{V} = \mathbf{G}\mathbf{G}'$. Therefore, the characteristic function can be evaluated in $O(N)$ operations by using the following formula:

$$\phi(u) = |\mathbf{G}|^{-1} |\mathbf{X}^* \mathbf{X}^*|^{-1/2} |\mathbf{X}' \mathbf{X}|^{1/2}$$

where $\mathbf{X}^* = \mathbf{G}^{-1} \mathbf{X}$. Refer to Ansley, Kohn, and Shively (1992) for more information on evaluation of the characteristic function.

Tests for Serial Correlation with Lagged Dependent Variables

When regressors contain lagged dependent variables, the Durbin-Watson statistic (d_1) for the first-order autocorrelation is biased toward 2 and has reduced power. Wallis (1972) shows that the bias in the Durbin-Watson statistic (d_4) for the fourth-order autocorrelation is smaller than the bias in d_1 in the presence of a first-order lagged dependent variable. Durbin (1970) proposes two alternative statistics (Durbin h and t) that are asymptotically equivalent. The h statistic is written as

$$h = \hat{\rho} \sqrt{N/(1 - N\hat{V})}$$

where $\hat{\rho} = \sum_{t=2}^N \hat{v}_t \hat{v}_{t-1} / \sum_{t=1}^N \hat{v}_t^2$ and \hat{V} is the least squares variance estimate for the coefficient of the lagged dependent variable. Durbin's t test consists of regressing the OLS residuals \hat{v}_t on explanatory variables and \hat{v}_{t-1} and testing the significance of the estimate for coefficient of \hat{v}_{t-1} .

Inder (1984) shows that the Durbin-Watson test for the absence of first-order autocorrelation is generally more powerful than the h test in finite samples. Refer to Inder (1986) and King and Wu (1991) for the Durbin-Watson test in the presence of lagged dependent variables.

Godfrey LM test

The GODFREY= option in the MODEL statement produces the Godfrey Lagrange multiplier test for serially correlated residuals for each equation (Godfrey 1978a and 1978b). r is the maximum autoregressive order, and specifies that Godfrey's tests be computed for lags 1 through r . The default number of lags is four.

Testing for Nonlinear Dependence: Ramsey's Reset Test

Ramsey's reset test is a misspecification test associated with the functional form of models to check whether power transforms need to be added to a model. The original linear model, henceforth called the restricted model, is

$$y_t = \mathbf{x}_t \beta + u_t$$

To test for misspecification in the functional form, the unrestricted model is

$$y_t = \mathbf{x}_t \beta + \sum_{j=2}^p \phi_j \hat{y}_t^j + u_t$$

where \hat{y}_t is the predicted value from the linear model and p is the power of \hat{y}_t in the unrestricted model equation starting from 2. The number of higher-ordered terms to be chosen depends on the discretion of the analyst. The RESET option produces test results for $p = 2, 3$, and 4.

The reset test is an F statistic for testing $H_0 : \phi_j = 0$, for all $j = 2, \dots, p$, against $H_1 : \phi_j \neq 0$ for at least one $j = 2, \dots, p$ in the unrestricted model and is computed as follows:

$$F_{(p-1, n-k-p+1)} = \frac{(SSE_R - SSE_U)/(p-1)}{SSE_U/(n-k-p+1)}$$

where SSE_R is the sum of squared errors due to the restricted model, SSE_U is the sum of squared errors due to the unrestricted model, n is the total number of observations, and k is the number of parameters in the original linear model.

Ramsey's test can be viewed as a linearity test that checks whether any nonlinear transformation of the specified independent variables has been omitted, but it need not help in identifying a new relevant variable other than those already specified in the current model.

Testing for Nonlinear Dependence: Heteroscedasticity Tests

Portmanteau Q Test

For nonlinear time series models, the portmanteau test statistic based on squared residuals is used to test for independence of the series (McLeod and Li 1983):

$$Q(q) = N(N + 2) \sum_{i=1}^q \frac{r(i; \hat{v}_t^2)}{(N - i)}$$

where

$$r(i; \hat{v}_t^2) = \frac{\sum_{t=i+1}^N (\hat{v}_t^2 - \hat{\sigma}^2)(\hat{v}_{t-i}^2 - \hat{\sigma}^2)}{\sum_{t=1}^N (\hat{v}_t^2 - \hat{\sigma}^2)^2}$$

$$\hat{\sigma}^2 = \frac{1}{N} \sum_{t=1}^N \hat{v}_t^2$$

This Q statistic is used to test the nonlinear effects (for example, GARCH effects) present in the residuals. The GARCH(p, q) process can be considered as an ARMA($\max(p, q), p$) process. See the section “Predicting the Conditional Variance” on page 403. Therefore, the Q statistic calculated from the squared residuals can be used to identify the order of the GARCH process.

Engle's Lagrange Multiplier Test for ARCH Disturbances

Engle (1982) proposed a Lagrange multiplier test for ARCH disturbances. The test statistic is asymptotically equivalent to the test used by Breusch and Pagan (1979). Engle's Lagrange multiplier test for the q th order ARCH process is written

$$LM(q) = \frac{N \mathbf{W}' \mathbf{Z} (\mathbf{Z}' \mathbf{Z})^{-1} \mathbf{Z}' \mathbf{W}}{\mathbf{W}' \mathbf{W}}$$

where

$$\mathbf{W} = \left(\frac{\hat{v}_1^2}{\hat{\sigma}^2} - 1, \dots, \frac{\hat{v}_N^2}{\hat{\sigma}^2} - 1 \right)'$$

and

$$\mathbf{Z} = \begin{bmatrix} 1 & \hat{v}_0^2 & \cdots & \hat{v}_{-q+1}^2 \\ \vdots & \vdots & \vdots & \vdots \\ \vdots & \vdots & \vdots & \vdots \\ 1 & \hat{v}_{N-1}^2 & \cdots & \hat{v}_{N-q}^2 \end{bmatrix}$$

The presample values ($\hat{v}_0^2, \dots, \hat{v}_{-q+1}^2$) have been set to 0. Note that the LM(q) tests might have different finite-sample properties depending on the presample values, though they are asymptotically equivalent regardless of the presample values.

Lee and King's Test for ARCH Disturbances

Engle's Lagrange multiplier test for ARCH disturbances is a two-sided test; that is, it ignores the inequality constraints for the coefficients in ARCH models. Lee and King (1993) propose a one-sided test and prove that the test is locally most mean powerful. Let $\varepsilon_t, t = 1, \dots, T$, denote the residuals to be tested. Lee and King's test checks

$$H_0 : \alpha_i = 0, i = 1, \dots, q$$

$$H_1 : \alpha_i > 0, i = 1, \dots, q$$

where $\alpha_i, i = 1, \dots, q$, are in the following ARCH(q) model:

$$\varepsilon_t = \sqrt{h_t} e_t, e_t \text{ iid}(0, 1)$$

$$h_t = \alpha_0 + \sum_{i=1}^q \alpha_i \varepsilon_{t-i}^2$$

The statistic is written as

$$S = \frac{\sum_{t=q+1}^T (\frac{\varepsilon_t^2}{h_0} - 1) \sum_{i=1}^q \varepsilon_{t-i}^2}{\left[2 \sum_{t=q+1}^T (\sum_{i=1}^q \varepsilon_{t-i}^2)^2 - \frac{2(\sum_{t=q+1}^T \sum_{i=1}^q \varepsilon_{t-i}^2)^2}{T-q} \right]^{1/2}}$$

Wong and Li's Test for ARCH Disturbances

Wong and Li (1995) propose a rank portmanteau statistic to minimize the effect of the existence of outliers in the test for ARCH disturbances. They first rank the squared residuals; that is, $R_t = \text{rank}(\varepsilon_t^2)$. Then they calculate the rank portmanteau statistic

$$Q_R = \sum_{i=1}^q \frac{(r_i - \mu_i)^2}{\sigma_i^2}$$

where r_i, μ_i , and σ_i^2 are defined as follows:

$$r_i = \frac{\sum_{t=i+1}^T (R_t - (T+1)/2)(R_{t-i} - (T+1)/2)}{T(T^2 - 1)/12}$$

$$\mu_i = -\frac{T-i}{T(T-1)}$$

$$\sigma_i^2 = \frac{5T^4 - (5i+9)T^3 + 9(i-2)T^2 + 2i(5i+8)T + 16i^2}{5(T-1)^2 T^2 (T+1)}$$

The Q, Engle's LM, Lee and King's, and Wong and Li's statistics are computed from the OLS residuals, or residuals if the NLAG= option is specified, assuming that disturbances are white noise. The Q, Engle's LM, and Wong and Li's statistics have an approximate $\chi_{(q)}^2$ distribution under the white-noise null hypothesis, while the Lee and King's statistic has a standard normal distribution under the white-noise null hypothesis.

Testing for Structural Change: Chow Test

Consider the linear regression model

$$\mathbf{y} = \mathbf{X}\beta + \mathbf{u}$$

where the parameter vector β contains k elements.

Split the observations for this model into two subsets at the break point specified by the CHOW= option, so that

$$\begin{aligned}\mathbf{y} &= (\mathbf{y}'_1, \mathbf{y}'_2)' \\ \mathbf{X} &= (\mathbf{X}'_1, \mathbf{X}'_2)' \\ \mathbf{u} &= (\mathbf{u}'_1, \mathbf{u}'_2)'\end{aligned}$$

Now consider the two linear regressions for the two subsets of the data modeled separately,

$$\mathbf{y}_1 = \mathbf{X}_1\beta_1 + \mathbf{u}_1$$

$$\mathbf{y}_2 = \mathbf{X}_2\beta_2 + \mathbf{u}_2$$

where the number of observations from the first set is n_1 and the number of observations from the second set is n_2 .

The Chow test statistic is used to test the null hypothesis $H_0 : \beta_1 = \beta_2$ conditional on the same error variance $V(\mathbf{u}_1) = V(\mathbf{u}_2)$. The Chow test is computed using three sums of square errors:

$$F_{chow} = \frac{(\hat{\mathbf{u}}'\hat{\mathbf{u}} - \hat{\mathbf{u}}'_1\hat{\mathbf{u}}_1 - \hat{\mathbf{u}}'_2\hat{\mathbf{u}}_2)/k}{(\hat{\mathbf{u}}'_1\hat{\mathbf{u}}_1 + \hat{\mathbf{u}}'_2\hat{\mathbf{u}}_2)/(n_1 + n_2 - 2k)}$$

where $\hat{\mathbf{u}}$ is the regression residual vector from the full set model, $\hat{\mathbf{u}}_1$ is the regression residual vector from the first set model, and $\hat{\mathbf{u}}_2$ is the regression residual vector from the second set model. Under the null hypothesis, the Chow test statistic has an F distribution with k and $(n_1 + n_2 - 2k)$ degrees of freedom, where k is the number of elements in β .

Chow (1960) suggested another test statistic that tests the hypothesis that the mean of prediction errors is 0. The predictive Chow test can also be used when $n_2 < k$.

The PCHOW= option computes the predictive Chow test statistic

$$F_{pchow} = \frac{(\hat{\mathbf{u}}'\hat{\mathbf{u}} - \hat{\mathbf{u}}'_1\hat{\mathbf{u}}_1)/n_2}{\hat{\mathbf{u}}'_1\hat{\mathbf{u}}_1/(n_1 - k)}$$

The predictive Chow test has an F distribution with n_2 and $(n_1 - k)$ degrees of freedom.

Predicted Values

The AUTOREG procedure can produce two kinds of predicted values for the response series and corresponding residuals and confidence limits. The residuals in both cases are computed as the actual value minus the predicted value. In addition, when GARCH models are estimated, the AUTOREG procedure can output predictions of the conditional error variance.

Predicting the Unconditional Mean

The first type of predicted value is obtained from only the structural part of the model, $\mathbf{x}_t' \mathbf{b}$. These are useful in predicting values of new response time series, which are assumed to be described by the same model as the current response time series. The predicted values, residuals, and upper and lower confidence limits for the structural predictions are requested by specifying the PREDICTEDM=, RESIDUALM=, UCLM=, or LCLM= option in the OUTPUT statement. The ALPHACLIM= option controls the confidence level for UCLM= and LCLM=. These confidence limits are for estimation of the mean of the dependent variable, $\mathbf{x}_t' \mathbf{b}$, where \mathbf{x}_t is the column vector of independent variables at observation t .

The predicted values are computed as

$$\hat{y}_t = \mathbf{x}_t' \mathbf{b}$$

and the upper and lower confidence limits as

$$\hat{u}_t = \hat{y}_t + t_{\alpha/2} v$$

$$\hat{l}_t = \hat{y}_t - t_{\alpha/2} v$$

where v^2 is an estimate of the variance of \hat{y}_t and $t_{\alpha/2}$ is the upper $\alpha/2$ percentage point of the t distribution.

$$\text{Prob}(T > t_{\alpha/2}) = \alpha/2$$

where T is an observation from a t distribution with q degrees of freedom. The value of α can be set with the ALPHACLIM= option. The degrees of freedom parameter, q , is taken to be the number of observations minus the number of free parameters in the final model. For the YW estimation method, the value of v is calculated as

$$v = \sqrt{s^2 \mathbf{x}_t' (\mathbf{X}' \mathbf{V}^{-1} \mathbf{X})^{-1} \mathbf{x}_t}$$

where s^2 is the error sum of squares divided by q . For the ULS and ML methods, it is calculated as

$$v = \sqrt{s^2 \mathbf{x}_t' \mathbf{W} \mathbf{x}_t}$$

where \mathbf{W} is the $k \times k$ submatrix of $(\mathbf{J}' \mathbf{J})^{-1}$ that corresponds to the regression parameters. For details, see the section “Computational Methods” on page 367 earlier in this chapter.

Predicting Future Series Realizations

The other predicted values use both the structural part of the model and the predicted values of the error process. These conditional mean values are useful in predicting future values of the current response time series. The predicted values, residuals, and upper and lower confidence limits for future observations conditional on past values are requested by the PREDICTED=, RESIDUAL=, UCL=, or LCL= option in the OUTPUT statement. The ALPHACLI= option controls the confidence level for UCL= and LCL=. These confidence limits are for the predicted value,

$$\tilde{y}_t = \mathbf{x}_t' \mathbf{b} + v_{t|t-1}$$

where \mathbf{x}_t is the vector of independent variables if all independent variables at time t are nonmissing, and $v_{t|t-1}$ is the minimum variance linear predictor of the error term, which is defined in the following recursive way given the autoregressive model, AR(m) model, for v_t :

$$v_{s|t} = \begin{cases} -\sum_{i=1}^m \hat{\phi}_i v_{s-i|t} & s > t \text{ or observation } s \text{ is missing} \\ y_s - \mathbf{x}_s' \mathbf{b} & 0 < s \leq t \text{ and observation } s \text{ is nonmissing} \\ 0 & s \leq 0 \end{cases}$$

where $\hat{\phi}_i, i = 1, \dots, m$, are the estimated AR parameters. Observation s is considered to be missing if the dependent variable or at least one independent variable is missing. If some of the independent variables at time t are missing, the predicted \tilde{y}_t is also missing. With the same definition of $v_{s|t}$, the prediction method can be easily extended to the multistep forecast of $\tilde{y}_{t+d}, d > 0$:

$$\tilde{y}_{t+d} = \mathbf{x}_{t+d}' \mathbf{b} + v_{t+d|t-1}$$

The prediction method is implemented through the Kalman filter.

If \tilde{y}_t is not missing, the upper and lower confidence limits are computed as

$$\tilde{u}_t = \tilde{y}_t + t_{\alpha/2} v$$

$$\tilde{l}_t = \tilde{y}_t - t_{\alpha/2} v$$

where v , in this case, is computed as

$$v = \sqrt{\mathbf{z}_t' \mathbf{V}_\beta \mathbf{z}_t + s^2 r}$$

where \mathbf{V}_β is the variance-covariance matrix of the estimation of regression parameter β ; \mathbf{z}_t is defined as

$$\mathbf{z}_t = \mathbf{x}_t + \sum_{i=1}^m \hat{\phi}_i \mathbf{x}_{t-i|t-1}$$

and $\mathbf{x}_{s|t}$ is defined in a similar way as $v_{s|t}$:

$$\mathbf{x}_{s|t} = \begin{cases} -\sum_{i=1}^m \hat{\phi}_i \mathbf{x}_{s-i|t} & s > t \text{ or observation } s \text{ is missing} \\ \mathbf{x}_s & 0 < s \leq t \text{ and observation } s \text{ is nonmissing} \\ 0 & s \leq 0 \end{cases}$$

The value $s^2 r$ is the estimate of the conditional prediction error variance. At the start of the series, and after missing values, r is generally greater than 1. See the section “[Predicting the Conditional Variance](#)” on page 403 for the computational details of r . The plot of residuals and confidence limits in [Example 8.4](#) illustrates this behavior.

Except to adjust the degrees of freedom for the error sum of squares, the preceding formulas do not account for the fact that the autoregressive parameters are estimated. In particular, the confidence limits are likely to be somewhat too narrow. In large samples, this is probably not an important effect, but it might be appreciable in small samples. Refer to Harvey (1981) for some discussion of this problem for AR(1) models.

At the beginning of the series (the first m observations, where m is the value of the NLAG= option) and after missing values, these residuals do not match the residuals obtained by using OLS on the transformed variables. This is because, in these cases, the predicted noise values must be based on less than a complete set of past noise values and, thus, have larger variance. The GLS transformation for these observations includes a scale factor in addition to a linear combination of past values. Put another way, the \mathbf{L}^{-1} matrix defined in the section “[Computational Methods](#)” on page 367 has the value 1 along the diagonal, except for the first m observations and after missing values.

Predicting the Conditional Variance

The GARCH process can be written

$$\epsilon_t^2 = \omega + \sum_{i=1}^n (\alpha_i + \gamma_i) \epsilon_{t-i}^2 - \sum_{j=1}^p \gamma_j \eta_{t-j} + \eta_t$$

where $\eta_t = \epsilon_t^2 - h_t$ and $n = \max(p, q)$. This representation shows that the squared residual ϵ_t^2 follows an ARMA(n, p) process. Then for any $d > 0$, the conditional expectations are as follows:

$$\mathbf{E}(\epsilon_{t+d}^2 | \Psi_t) = \omega + \sum_{i=1}^n (\alpha_i + \gamma_i) \mathbf{E}(\epsilon_{t+d-i}^2 | \Psi_t) - \sum_{j=1}^p \gamma_j \mathbf{E}(\eta_{t+d-j} | \Psi_t)$$

The d -step-ahead prediction error, $\xi_{t+d} = y_{t+d} - y_{t+d|t}$, has the conditional variance

$$\mathbf{V}(\xi_{t+d} | \Psi_t) = \sum_{j=0}^{d-1} g_j^2 \sigma_{t+d-j|t}^2$$

where

$$\sigma_{t+d-j|t}^2 = \mathbf{E}(\epsilon_{t+d-j}^2 | \Psi_t)$$

Coefficients in the conditional d -step prediction error variance are calculated recursively using the formula

$$g_j = -\varphi_1 g_{j-1} - \dots - \varphi_m g_{j-m}$$

where $g_0 = 1$ and $g_j = 0$ if $j < 0$; $\varphi_1, \dots, \varphi_m$ are autoregressive parameters. Since the parameters are not known, the conditional variance is computed using the estimated autoregressive parameters. The d -step-ahead prediction error variance is simplified when there are no autoregressive terms:

$$\mathbf{V}(\xi_{t+d} | \Psi_t) = \sigma_{t+d|t}^2$$

Therefore, the one-step-ahead prediction error variance is equivalent to the conditional error variance defined in the GARCH process:

$$h_t = \mathbf{E}(\epsilon_t^2 | \Psi_{t-1}) = \sigma_{t|t-1}^2$$

The multistep forecast of conditional error variance of the EGARCH, QGARCH, TGARCH, PGARCH, and GARCH-M models cannot be calculated using the preceding formula for the GARCH model. The following formulas are recursively implemented to obtain the multistep forecast of conditional error variance of these models:

- for the EGARCH(p, q) model:

$$\ln(\sigma_{t+d|t}^2) = \omega + \sum_{i=d}^q \alpha_i g(z_{t+d-i}) + \sum_{j=1}^{d-1} \gamma_j \ln(\sigma_{t+d-j|t}^2) + \sum_{j=d}^p \gamma_j \ln(h_{t+d-j})$$

where

$$g(z_t) = \theta z_t + |z_t| - E|z_t|$$

$$z_t = \epsilon_t / \sqrt{h_t}$$

- for the QGARCH(p, q) model:

$$\begin{aligned}\sigma_{t+d|t}^2 = \omega &+ \sum_{i=1}^{d-1} \alpha_i (\sigma_{t+d-i|t}^2 + \psi_i^2) + \sum_{i=d}^q \alpha_i (\epsilon_{t+d-i} - \psi_i)^2 \\ &+ \sum_{j=1}^{d-1} \gamma_j \sigma_{t+d-j|t}^2 + \sum_{j=d}^p \gamma_j h_{t+d-j}\end{aligned}$$

- for the TGARCH(p, q) model:

$$\begin{aligned}\sigma_{t+d|t}^2 = \omega &+ \sum_{i=1}^{d-1} (\alpha_i + \psi_i/2) \sigma_{t+d-i|t}^2 + \sum_{i=d}^q (\alpha_i + 1_{\epsilon_{t+d-i} < 0} \psi_i) \epsilon_{t+d-i}^2 \\ &+ \sum_{j=1}^{d-1} \gamma_j \sigma_{t+d-j|t}^2 + \sum_{j=d}^p \gamma_j h_{t+d-j}\end{aligned}$$

- for the PGARCH(p, q) model:

$$\begin{aligned}(\sigma_{t+d|t}^2)^\lambda = \omega &+ \sum_{i=1}^{d-1} \alpha_i ((1 + \psi_i)^{2\lambda} + (1 - \psi_i)^{2\lambda}) (\sigma_{t+d-i|t}^2)^\lambda / 2 \\ &+ \sum_{i=d}^q \alpha_i (|\epsilon_{t+d-i}| - \psi_i \epsilon_{t+d-i})^{2\lambda} \\ &+ \sum_{j=1}^{d-1} \gamma_j (\sigma_{t+d-j|t}^2)^\lambda + \sum_{j=d}^p \gamma_j h_{t+d-j}^\lambda\end{aligned}$$

- for the GARCH-M model: ignoring the mean effect and directly using the formula of the corresponding GARCH model.

If the conditional error variance is homoscedastic, the conditional prediction error variance is identical to the unconditional prediction error variance

$$\mathbf{V}(\xi_{t+d}|\Psi_t) = \mathbf{V}(\xi_{t+d}) = \sigma^2 \sum_{j=0}^{d-1} g_j^2$$

since $\sigma_{t+d-j|t}^2 = \sigma^2$. You can compute $s^2 r$ (which is the second term of the variance for the predicted value \tilde{y}_t explained in the section “[Predicting Future Series Realizations](#)” on page 401) by using the formula $\sigma^2 \sum_{j=0}^{d-1} g_j^2$, and r is estimated from $\sum_{j=0}^{d-1} g_j^2$ by using the estimated autoregressive parameters.

Consider the following conditional prediction error variance:

$$\mathbf{V}(\xi_{t+d}|\Psi_t) = \sigma^2 \sum_{j=0}^{d-1} g_j^2 + \sum_{j=0}^{d-1} g_j^2 (\sigma_{t+d-j|t}^2 - \sigma^2)$$

The second term in the preceding equation can be interpreted as the noise from using the homoscedastic conditional variance when the errors follow the GARCH process. However, it is expected that if the GARCH process is covariance stationary, the difference between the conditional prediction error variance and the unconditional prediction error variance disappears as the forecast horizon d increases.

OUT= Data Set

The output SAS data set produced by the OUTPUT statement contains all the variables in the input data set and the new variables specified by the OUTPUT statement options. See the section “[OUTPUT Statement](#)” on page 360 earlier in this chapter for information on the output variables that can be created. The output data set contains one observation for each observation in the input data set.

OUTEST= Data Set

The OUTEST= data set contains all the variables used in any MODEL statement. Each regressor variable contains the estimate for the corresponding regression parameter in the corresponding model. In addition, the OUTEST= data set contains the following variables:

<code>_A_</code> <i>i</i>	the <i>i</i> th order autoregressive parameter estimate. There are <i>m</i> such variables <code>_A_1</code> through <code>_A_</code> <i>m</i> , where <i>m</i> is the value of the NLAG= option.
<code>_AH_</code> <i>i</i>	the <i>i</i> th order ARCH parameter estimate, if the GARCH= option is specified. There are <i>q</i> such variables <code>_AH_1</code> through <code>_AH_</code> <i>q</i> , where <i>q</i> is the value of the Q= option. The variable <code>_AH_0</code> contains the estimate of ω .
<code>_AHP_</code> <i>i</i>	the estimate of the ψ_i parameter in the PGARCH model, if a PGARCH model is specified. There are <i>q</i> such variables <code>_AHP_1</code> through <code>_AHP_</code> <i>q</i> , where <i>q</i> is the value of the Q= option.
<code>_AHQ_</code> <i>i</i>	the estimate of the ψ_i parameter in the QGARCH model, if a QGARCH model is specified. There are <i>q</i> such variables <code>_AHQ_1</code> through <code>_AHQ_</code> <i>q</i> , where <i>q</i> is the value of the Q= option.
<code>_AHT_</code> <i>i</i>	the estimate of the ψ_i parameter in the TGARCH model, if a TGARCH model is specified. There are <i>q</i> such variables <code>_AHT_1</code> through <code>_AHT_</code> <i>q</i> , where <i>q</i> is the value of the Q= option.
<code>_DELTA_</code>	the estimated mean parameter for the GARCH-M model if a GARCH-in-mean model is specified
<code>_DEPVAR_</code>	the name of the dependent variable
<code>_GH_</code> <i>i</i>	the <i>i</i> th order GARCH parameter estimate, if the GARCH= option is specified. There are <i>p</i> such variables <code>_GH_1</code> through <code>_GH_</code> <i>p</i> , where <i>p</i> is the value of the P= option.
<code>_HET_</code> <i>i</i>	the <i>i</i> th heteroscedasticity model parameter specified by the HETERO statement
INTERCEPT	the intercept estimate. INTERCEPT contains a missing value for models for which the NOINT option is specified.

<code>_METHOD_</code>	the estimation method that is specified in the <code>METHOD=</code> option
<code>_MODEL_</code>	the label of the <code>MODEL</code> statement if one is given, or blank otherwise
<code>_MSE_</code>	the value of the mean square error for the model
<code>_NAME_</code>	the name of the row of covariance matrix for the parameter estimate, if the <code>COVOUT</code> option is specified
<code>_LAMBDA_</code>	the estimate of the power parameter λ in the PGARCH model, if a PGARCH model is specified.
<code>_LIKLHD_</code>	the log-likelihood value of the GARCH model
<code>_SSE_</code>	the value of the error sum of squares
<code>_START_</code>	the estimated start-up value for the conditional variance when <code>GARCH=(STARTUP=ESTIMATE)</code> option is specified
<code>_STATUS_</code>	This variable indicates the optimization status. <code>_STATUS_ = 0</code> indicates that there were no errors during the optimization and the algorithm converged. <code>_STATUS_ = 1</code> indicates that the optimization could not improve the function value and means that the results should be interpreted with caution. <code>_STATUS_ = 2</code> indicates that the optimization failed due to the number of iterations exceeding either the maximum default or the specified number of iterations or the number of function calls allowed. <code>_STATUS_ = 3</code> indicates that an error occurred during the optimization process. For example, this error message is obtained when a function or its derivatives cannot be calculated at the initial values or during the iteration process, when an optimization step is outside of the feasible region or when active constraints are linearly dependent.
<code>_STDERR_</code>	standard error of the parameter estimate, if the <code>COVOUT</code> option is specified.
<code>_TDFI_</code>	the estimate of the inverted degrees of freedom for Student's t distribution, if <code>DIST=T</code> is specified.
<code>_THETA_</code>	the estimate of the θ parameter in the EGARCH model, if an EGARCH model is specified.
<code>_TYPE_</code>	OLS for observations containing parameter estimates, or COV for observations containing covariance matrix elements.

The `OUTEST=` data set contains one observation for each `MODEL` statement giving the parameter estimates for that model. If the `COVOUT` option is specified, the `OUTEST=` data set includes additional observations for each `MODEL` statement giving the rows of the covariance of parameter estimates matrix. For covariance observations, the value of the `_TYPE_` variable is `COV`, and the `_NAME_` variable identifies the parameter associated with that row of the covariance matrix.

Printed Output

The AUTOREG procedure prints the following items:

1. the name of the dependent variable

2. the ordinary least squares estimates
3. Estimates of autocorrelations, which include the estimates of the autocovariances, the autocorrelations, and (if there is sufficient space) a graph of the autocorrelation at each LAG
4. if the PARTIAL option is specified, the partial autocorrelations
5. the preliminary MSE, which results from solving the Yule-Walker equations. This is an estimate of the final MSE.
6. the estimates of the autoregressive parameters (Coefficient), their standard errors (Standard Error), and the ratio of estimate to standard error (t Value)
7. the statistics of fit for the final model. These include the error sum of squares (SSE), the degrees of freedom for error (DFE), the mean square error (MSE), the mean absolute error (MAE), the mean absolute percentage error (MAPE), the root mean square error (Root MSE), the Schwarz information criterion (SBC), the Hannan-Quinn information criterion (HQC), the Akaike information criterion (AIC), the corrected Akaike information criterion (AICC), the Durbin-Watson statistic (Durbin-Watson), the regression R^2 (Regress R-square), and the total R^2 (Total R-square). For GARCH models, the following additional items are printed:
 - the value of the log-likelihood function (Log Likelihood)
 - the number of observations that are used in estimation (Observations)
 - the unconditional variance (Uncond Var)
 - the normality test statistic and its p -value (Normality Test and $\text{Pr} > \text{ChiSq}$)
8. the parameter estimates for the structural model (Estimate), a standard error estimate (Standard Error), the ratio of estimate to standard error (t Value), and an approximation to the significance probability for the parameter being 0 (Approx $\text{Pr} > |\text{t}|$)
9. If the NLAG= option is specified with METHOD=ULS or METHOD=ML, the regression parameter estimates are printed again, assuming that the autoregressive parameter estimates are known. In this case, the Standard Error and related statistics for the regression estimates will, in general, be different from the case when they are estimated. Note that from a standpoint of estimation, Yule-Walker and iterated Yule-Walker methods (NLAG= with METHOD=YW, ITYW) generate only one table, assuming AR parameters are given.
10. If you specify the NORMAL option, the Bera-Jarque normality test statistics are printed. If you specify the LAGDEP option, Durbin's h or Durbin's t is printed.

ODS Table Names

PROC AUTOREG assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the [Table 8.2](#).

Table 8.2 ODS Tables Produced in PROC AUTOREG

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ClassLevels	Class Levels	default
FitSummary	Summary of regression	default
SummaryDepVarCen	Summary of regression (centered dependent var)	CENTER
SummaryNoIntercept	Summary of regression (no intercept)	NOINT
YWIterSSE	Yule-Walker iteration sum of squared error	METHOD=ITYW
PreMSE	Preliminary MSE	NLAG=
Dependent	Dependent variable	default
DependenceEquations	Linear dependence equation	
ARCHTest	Tests for ARCH disturbances based on OLS residuals	ARCHTEST=
ARCHTestAR	Tests for ARCH disturbances based on residuals	ARCHTEST= (with NLAG=)
BDSTest	BDS test for independence	BDS<=(>)
RunsTest	Runs test for independence	RUNS<=(>)
TurningPointTest	Turning Point test for independence	TP<=(>)
VNRRankTest	Rank version of von Neumann ratio test for independence	VNRRANK<=(>)
ChowTest	Chow test and predictive Chow test	CHOW= PCHOW=
Godfrey	Godfrey's serial correlation test	GODFREY<=(>)
PhilPerron	Phillips-Perron unit root test	STATIONARITY= (PHILIPS<=(>)) (no regressor)
PhilOul	Phillips-Ouliaris cointegration test	STATIONARITY= (PHILIPS<=(>)) (has regressor)
ADF	Augmented Dickey-Fuller unit root test	STATIONARITY= (ADF<=(>)) (no regressor)
EngGran	Engle-Granger cointegration test	STATIONARITY= (ADF<=(>)) (has regressor)
ERS	ERS unit root test	STATIONARITY= (ERS<=(>))
NgPerron	Ng-Perron Unit root tests	STATIONARITY= (NP=<(>))
KPSS	Kwiatkowski, Phillips, Schmidt, and Shin test	STATIONARITY= (KPSS<=(>))
ResetTest	Ramsey's RESET test	RESET
ARParameterEstimates	Estimates of autoregressive parameters	NLAG=

Table 8.2 *continued*

ODS Table Name	Description	Option
CorrGraph	estimates of autocorrelations	NLAG=
BackStep	Backward elimination of autoregressive terms	BACKSTEP
ExpAutocorr	Expected autocorrelations	NLAG=
IterHistory	Iteration history	ITPRINT
ParameterEstimates	Parameter estimates	default
ParameterEstimatesGivenAR	Parameter estimates assuming AR parameters are given	NLAG=, METHOD= ULS ML
PartialAutoCorr	Partial autocorrelation	PARTIAL
CovB	Covariance of parameter estimates	COVB
CorrB	Correlation of parameter estimates	CORRB
CholeskyFactor	Cholesky root of gamma	ALL
Coefficients	Coefficients for first NLAG observations	COEF
GammaInverse	Gamma inverse	GINV
ConvergenceStatus	Convergence status table	default
MiscStat	Durbin t or Durbin h , Bera-Jarque normality test	LAGDEP=; NORMAL
DWTest	Durbin-Watson statistics	DW=
ODS Tables Created by the RESTRICT Statement		
Restrict	Restriction table	default
ODS Tables Created by the TEST Statement		
FTest	F test	default, TYPE=ALL
WaldTest	Wald test	TYPE=WALD ALL
LMTest	LM test	TYPE=LM ALL (only supported with GARCH= option)
LRTest	LR test	TYPE=LR ALL (only supported with GARCH= option)

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the AUTOREG procedure.

To request these graphs, you must specify the ODS GRAPHICS statement. By default, only the residual, predicted versus actual, and autocorrelation of residuals plots are produced. If, in addition to the ODS GRAPHICS statement, you also specify the ALL option in either the PROC AUTOREG statement or MODEL statement, all plots are created. For HETERO, GARCH, and AR models studentized residuals are replaced by standardized residuals. For the autoregressive models, the conditional variance of the residuals is computed as described in the section “[Predicting Future Series Realizations](#)” on page 401. For the GARCH and HETERO models, residuals are assumed to have h_t conditional variance invoked by the HT= option of the OUTPUT statement. For all these cases, the Cook’s D plot is not produced.

ODS Graph Names

PROC AUTOREG assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when using ODS. The names are listed in [Table 8.3](#).

Table 8.3 ODS Graphics Produced in PROC AUTOREG

ODS Table Name	Description	Plots= Option
DiagnosticsPanel	All applicable plots	
ACFPlot	Autocorrelation of residuals	ACF
FitPlot	Predicted versus actual plot	FITPLOT, default
CooksD	Cook’s D plot	COOKSD (no NLAG=)
IACFPlot	Inverse autocorrelation of residuals	IACF
QQPlot	Q-Q plot of residuals	QQ
PACFPlot	Partial autocorrelation of residuals	PACF
ResidualHistogram	Histogram of the residuals	RESIDUALHISTOGRAM or RESIDHISTOGRAM
ResidualPlot	Residual plot	RESIDUAL or RES, default
StudentResidualPlot	Studentized residual plot	STUDENTRESIDUAL (no NLAG=, GARCH=, or HET- ERO)
StandardResidualPlot	Standardized residual plot	STANDARDRESIDUAL
WhiteNoiseLogProbPlot	Tests for white noise residuals	WHITENOISE

Examples: AUTOREG Procedure

Example 8.1: Analysis of Real Output Series

In this example, the annual real output series is analyzed over the period 1901 to 1983 (Balke and Gordon 1986, pp. 581–583). With the following DATA step, the original data are transformed using the natural logarithm, and the differenced series DY is created for further analysis. The log of real output is plotted in [Output 8.1.1](#).

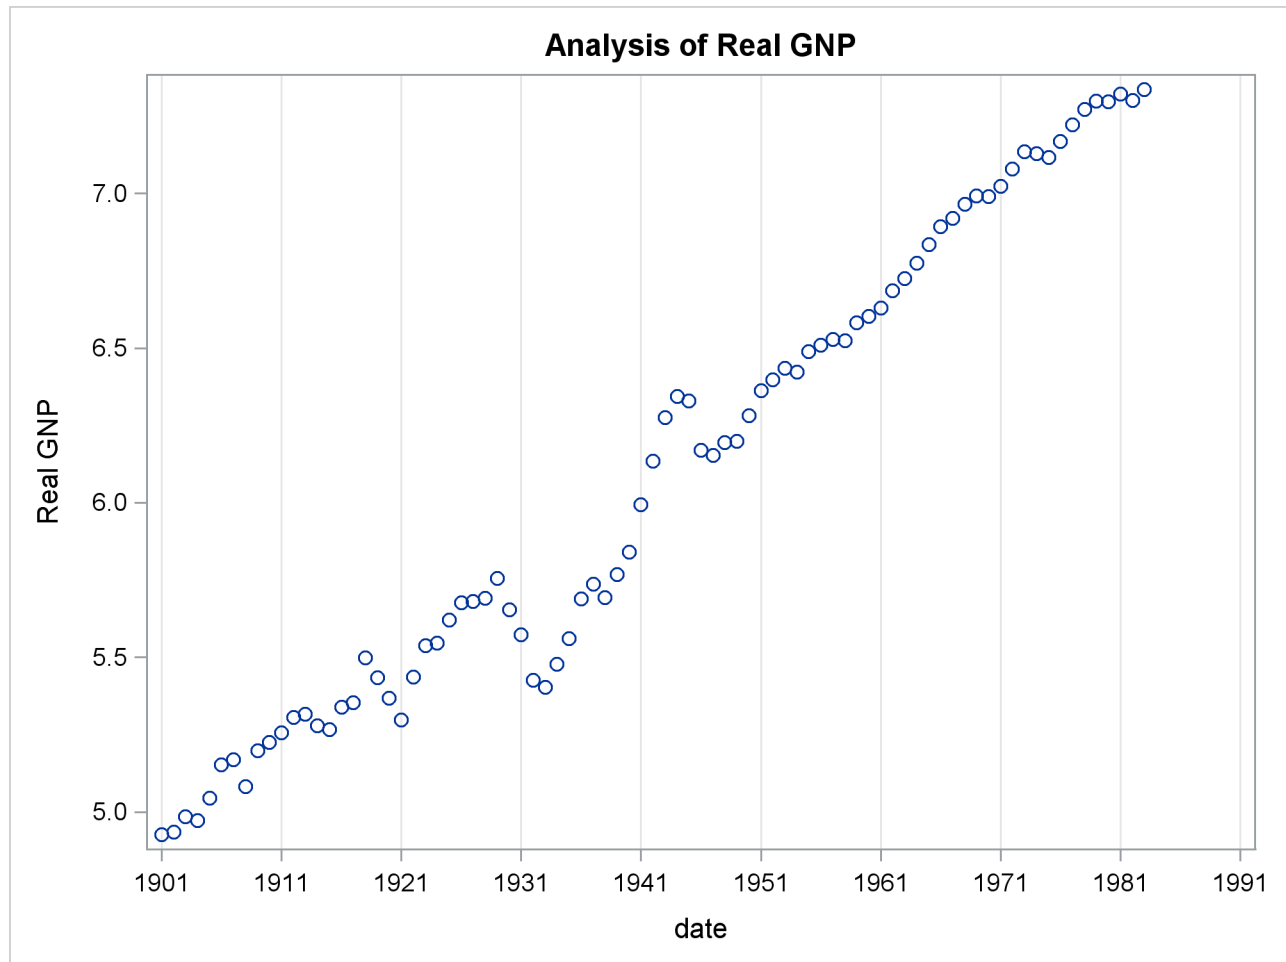
```

title 'Analysis of Real GNP';
data gnp;
    date = intnx( 'year', '01jan1901'd, _n_-1 );
    format date year4.;
    input x @@;
    y = log(x);
    dy = dif(y);
    t = _n_;
    label y = 'Real GNP'
          dy = 'First Difference of Y'
          t = 'Time Trend';
datalines;

... more lines ...

proc sgplot data=gnp noautolegend;
    scatter x=date y=y;
    xaxis grid values=('01jan1901'd '01jan1911'd '01jan1921'd '01jan1931'd
        '01jan1941'd '01jan1951'd '01jan1961'd '01jan1971'd
        '01jan1981'd '01jan1991'd);
run;

```

Output 8.1.1 Real Output Series: 1901 – 1983

The (linear) trend-stationary process is estimated using the following form:

$$y_t = \beta_0 + \beta_1 t + v_t$$

where

$$v_t = \epsilon_t - \varphi_1 v_{t-1} - \varphi_2 v_{t-2}$$

$$\epsilon_t \sim \text{IN}(0, \sigma_\epsilon)$$

The preceding trend-stationary model assumes that uncertainty over future horizons is bounded since the error term, v_t , has a finite variance. The maximum likelihood AR estimates from the statements that follow are shown in [Output 8.1.2](#):

```
proc autoreg data=gnp;
  model y = t / nlag=2 method=ml;
run;
```

Output 8.1.2 Estimating the Linear Trend Model

Analysis of Real GNP						
The AUTOREG Procedure						
Maximum Likelihood Estimates						
SSE		0.23954331	DFE		79	
MSE		0.00303	Root MSE		0.05507	
SBC		-230.39355	AIC		-240.06891	
MAE		0.04016596	AICC		-239.55609	
MAPE		0.69458594	HQC		-236.18189	
Log Likelihood		124.034454	Regress R-Square		0.8645	
Durbin-Watson		1.9935	Total R-Square		0.9947	
			Observations		83	
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	4.8206	0.0661	72.88	<.0001	
t	1	0.0302	0.001346	22.45	<.0001	Time Trend
AR1	1	-1.2041	0.1040	-11.58	<.0001	
AR2	1	0.3748	0.1039	3.61	0.0005	
Autoregressive parameters assumed given						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	4.8206	0.0661	72.88	<.0001	
t	1	0.0302	0.001346	22.45	<.0001	Time Trend

Nelson and Plosser (1982) failed to reject the hypothesis that macroeconomic time series are nonstationary and have no tendency to return to a trend line. In this context, the simple random walk process can be used as an alternative process:

$$y_t = \beta_0 + y_{t-1} + v_t$$

where $v_t = \epsilon_t$ and $y_0 = 0$. In general, the difference-stationary process is written as

$$\phi(L)(1-L)y_t = \beta_0\phi(1) + \theta(L)\epsilon_t$$

where L is the lag operator. You can observe that the class of a difference-stationary process should have at least one unit root in the AR polynomial $\phi(L)(1-L)$.

The Dickey-Fuller procedure is used to test the null hypothesis that the series has a unit root in the AR polynomial. Consider the following equation for the augmented Dickey-Fuller test:

$$\Delta y_t = \beta_0 + \delta t + \beta_1 y_{t-1} + \sum_{i=1}^m \gamma_i \Delta y_{t-i} + \epsilon_t$$

where $\Delta = 1 - L$. The test statistic τ_τ is the usual t ratio for the parameter estimate $\hat{\beta}_1$, but the τ_τ does not follow a t distribution.

The following code performs the augmented Dickey-Fuller test with $m = 3$ and we are interesting in the test results in the linear time trend case since the previous plot reveals there is a linear trend.

```
proc autoreg data = gnp;
  model y = / stationarity =(adf =3);
run;
```

The augmented Dickey-Fuller test indicates that the output series may have a difference-stationary process. The statistic Tau with linear time trend has a value of -2.6190 and its p -value is 0.2732 . The statistic Rho has a p -value of 0.0817 which also indicates the null of unit root is accepted at the 5% level. (See [Output 8.1.3](#).)

Output 8.1.3 Augmented Dickey-Fuller Test Results

Analysis of Real GNP							
The AUTOREG Procedure							
Augmented Dickey-Fuller Unit Root Tests							
Type	Lags	Rho	Pr < Rho	Tau	Pr < Tau	F	Pr > F
Zero Mean	3	0.3827	0.7732	3.3342	0.9997		
Single Mean	3	-0.1674	0.9465	-0.2046	0.9326	5.7521	0.0211
Trend	3	-18.0246	0.0817	-2.6190	0.2732	3.4472	0.4957

The AR(1) model for the differenced series DY is estimated using the maximum likelihood method for the period 1902 to 1983. The difference-stationary process is written

$$\Delta y_t = \beta_0 + v_t$$

$$v_t = \epsilon_t - \phi_1 v_{t-1}$$

The estimated value of ϕ_1 is -0.297 and that of β_0 is 0.0293 . All estimated values are statistically significant. The PROC step follows:

```
proc autoreg data=gnp;
  model dy = / nlag=1 method=ml;
run;
```

The printed output produced by the PROC step is shown in [Output 8.1.4](#).

Output 8.1.4 Estimating the Differenced Series with AR(1) Error

Analysis of Real GNP					
The AUTOREG Procedure					
Maximum Likelihood Estimates					
SSE	0.27107673	DFE		80	
MSE	0.00339	Root MSE		0.05821	
SBC	-226.77848	AIC		-231.59192	
MAE	0.04333026	AICC		-231.44002	
MAPE	153.637587	HQC		-229.65939	
Log Likelihood	117.795958	Regress R-Square		0.0000	
Durbin-Watson	1.9268	Total R-Square		0.0900	
		Observations		82	
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.0293	0.009093	3.22	0.0018
AR1	1	-0.2967	0.1067	-2.78	0.0067
Autoregressive parameters assumed given					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.0293	0.009093	3.22	0.0018

Example 8.2: Comparing Estimates and Models

In this example, the Grunfeld series are estimated using different estimation methods. Refer to Maddala (1977) for details of the Grunfeld investment data set. For comparison, the Yule-Walker method, ULS method, and maximum likelihood method estimates are shown. With the DWPROB option, the p -value of the Durbin-Watson statistic is printed. The Durbin-Watson test indicates the positive autocorrelation of the regression residuals. The DATA and PROC steps follow:

```
title 'Grunfeld''s Investment Models Fit with Autoregressive Errors';
data grunfeld;
  input year gei gef gec;
  label gei = 'Gross investment GE'
        gec = 'Lagged Capital Stock GE'
        gef = 'Lagged Value of GE shares';
datalines;

    ... more lines ...

proc autoreg data=grunfeld;
  model gei = gef gec / nlag=1 dwprob;
  model gei = gef gec / nlag=1 method=uls;
  model gei = gef gec / nlag=1 method=ml;
run;
```

The printed output produced by each of the MODEL statements is shown in [Output 8.2.1](#) through [Output 8.2.4](#).

Output 8.2.1 OLS Analysis of Residuals

Grunfeld's Investment Models Fit with Autoregressive Errors																							
The AUTOREG Procedure																							
Dependent Variable					gei																		
					Gross investment GE																		
Ordinary Least Squares Estimates																							
SSE		13216.5878	DFE		17																		
MSE		777.44634	Root MSE		27.88272																		
SBC		195.614652	AIC		192.627455																		
MAE		19.9433255	AICC		194.127455																		
MAPE		23.2047973	HQC		193.210587																		
Durbin-Watson		1.0721	Regress R-Square		0.7053																		
			Total R-Square		0.7053																		
Parameter Estimates																							
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label																	
Intercept	1	-9.9563	31.3742	-0.32	0.7548																		
gef	1	0.0266	0.0156	1.71	0.1063	Lagged Value of GE shares																	
gec	1	0.1517	0.0257	5.90	<.0001	Lagged Capital Stock GE																	
Estimates of Autocorrelations																							
Lag	Covariance	Correlation	-1	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	1
0	660.8	1.000000													*****								
1	304.6	0.460867													*****								
Preliminary MSE					520.5																		

Output 8.2.2 Regression Results Using Default Yule-Walker Method

Estimates of Autoregressive Parameters			
Lag	Coefficient	Standard Error	t Value
1	-0.460867	0.221867	-2.08

Output 8.2.2 *continued*

Yule-Walker Estimates					
SSE		10238.2951	DFE		16
MSE		639.89344	Root MSE		25.29612
SBC		193.742396	AIC		189.759467
MAE		18.0715195	AICC		192.426133
MAPE		21.0772644	HQC		190.536976
Durbin-Watson		1.3321	Regress R-Square		0.5717
			Total R-Square		0.7717

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	-18.2318	33.2511	-0.55	0.5911	
gef	1	0.0332	0.0158	2.10	0.0523	Lagged Value of GE shares
gec	1	0.1392	0.0383	3.63	0.0022	Lagged Capital Stock GE

Output 8.2.3 Regression Results Using Unconditional Least Squares Method

Estimates of Autoregressive Parameters				
Lag	Coefficient	Standard Error	t Value	
1	-0.460867	0.221867	-2.08	

Algorithm converged.

Unconditional Least Squares Estimates				
SSE	10220.8455	DFE		16
MSE	638.80284	Root MSE		25.27455
SBC	193.756692	AIC		189.773763
MAE	18.1317764	AICC		192.44043
MAPE	21.149176	HQC		190.551273
Durbin-Watson	1.3523	Regress R-Square		0.5511
		Total R-Square		0.7721

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	-18.6582	34.8101	-0.54	0.5993	
gef	1	0.0339	0.0179	1.89	0.0769	Lagged Value of GE shares
gec	1	0.1369	0.0449	3.05	0.0076	Lagged Capital Stock GE
AR1	1	-0.4996	0.2592	-1.93	0.0718	

Output 8.2.3 *continued*

Autoregressive parameters assumed given						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-18.6582	33.7567	-0.55	0.5881	
gef	1	0.0339	0.0159	2.13	0.0486	Lagged Value of GE shares
gec	1	0.1369	0.0404	3.39	0.0037	Lagged Capital Stock GE

Output 8.2.4 Regression Results Using Maximum Likelihood Method

Estimates of Autoregressive Parameters						
Lag	Coefficient	Standard Error	t Value			
1	-0.460867	0.221867	-2.08			
Algorithm converged.						
Maximum Likelihood Estimates						
SSE	10229.2303	DFE	16			
MSE	639.32689	Root MSE	25.28491			
SBC	193.738877	AIC	189.755947			
MAE	18.0892426	AICC	192.422614			
MAPE	21.0978407	HQC	190.533457			
Log Likelihood	-90.877974	Regress R-Square	0.5656			
Durbin-Watson	1.3385	Total R-Square	0.7719			
		Observations	20			
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-18.3751	34.5941	-0.53	0.6026	
gef	1	0.0334	0.0179	1.87	0.0799	Lagged Value of GE shares
gec	1	0.1385	0.0428	3.23	0.0052	Lagged Capital Stock GE
AR1	1	-0.4728	0.2582	-1.83	0.0858	
Autoregressive parameters assumed given						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-18.3751	33.3931	-0.55	0.5897	
gef	1	0.0334	0.0158	2.11	0.0512	Lagged Value of GE shares
gec	1	0.1385	0.0389	3.56	0.0026	Lagged Capital Stock GE

Example 8.3: Lack-of-Fit Study

Many time series exhibit high positive autocorrelation, having the smooth appearance of a random walk. This behavior can be explained by the partial adjustment and adaptive expectation hypotheses.

Short-term forecasting applications often use autoregressive models because these models absorb the behavior of this kind of data. In the case of a first-order AR process where the autoregressive parameter is exactly 1 (a *random walk*), the best prediction of the future is the immediate past.

PROC AUTOREG can often greatly improve the fit of models, not only by adding additional parameters but also by capturing the random walk tendencies. Thus, PROC AUTOREG can be expected to provide good short-term forecast predictions.

However, good forecasts do not necessarily mean that your structural model contributes anything worthwhile to the fit. In the following example, random noise is fit to part of a sine wave. Notice that the structural model does not fit at all, but the autoregressive process does quite well and is very nearly a first difference ($AR(1) = -.976$). The DATA step, PROC AUTOREG step, and PROC SGPLOT step follow:

```

title1 'Lack of Fit Study';
title2 'Fitting White Noise Plus Autoregressive Errors to a Sine Wave';

data a;
  pi=3.14159;
  do time = 1 to 75;
    if time > 75 then y = .;
    else y = sin( pi * ( time / 50 ) );
    x = ranuni( 1234567 );
    output;
  end;
run;

proc autoreg data=a plots;
  model y = x / nlag=1;
  output out=b p=pred pm=xbeta;
run;

proc sgplot data=b;
  scatter y=y x=time / markerattrs=(color=black);
  series y=pred x=time / lineattrs=(color=blue);
  series y=xbeta x=time / lineattrs=(color=red);
run;

```

The printed output produced by PROC AUTOREG is shown in [Output 8.3.1](#) and [Output 8.3.2](#). Plots of observed and predicted values are shown in [Output 8.3.3](#) and [Output 8.3.4](#). Note: the plot [Output 8.3.3](#) can be viewed in the Autoreg.Model.FitDiagnosticPlots category by selecting **View►Results**.

Output 8.3.1 Results of OLS Analysis: No Autoregressive Model Fit

Lack of Fit Study																							
Fitting White Noise Plus Autoregressive Errors to a Sine Wave																							
The AUTOREG Procedure																							
Dependent Variable y																							
Ordinary Least Squares Estimates																							
SSE	34.8061005	DFE		73																			
MSE	0.47680	Root MSE		0.69050																			
SBC	163.898598	AIC		159.263622																			
MAE	0.59112447	AICC		159.430289																			
MAPE	117894.045	HQC		161.114317																			
Durbin-Watson	0.0057	Regress R-Square		0.0008																			
		Total R-Square		0.0008																			
Parameter Estimates																							
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t																		
Intercept	1	0.2383	0.1584	1.50	0.1367																		
x	1	-0.0665	0.2771	-0.24	0.8109																		
Estimates of Autocorrelations																							
Lag	Covariance	Correlation	-1	9	8	7	6	5	4	3	2	1	0	1	2	3	4	5	6	7	8	9	1
0	0.4641	1.000000																					
1	0.4531	0.976386																					
Preliminary MSE			0.0217																				

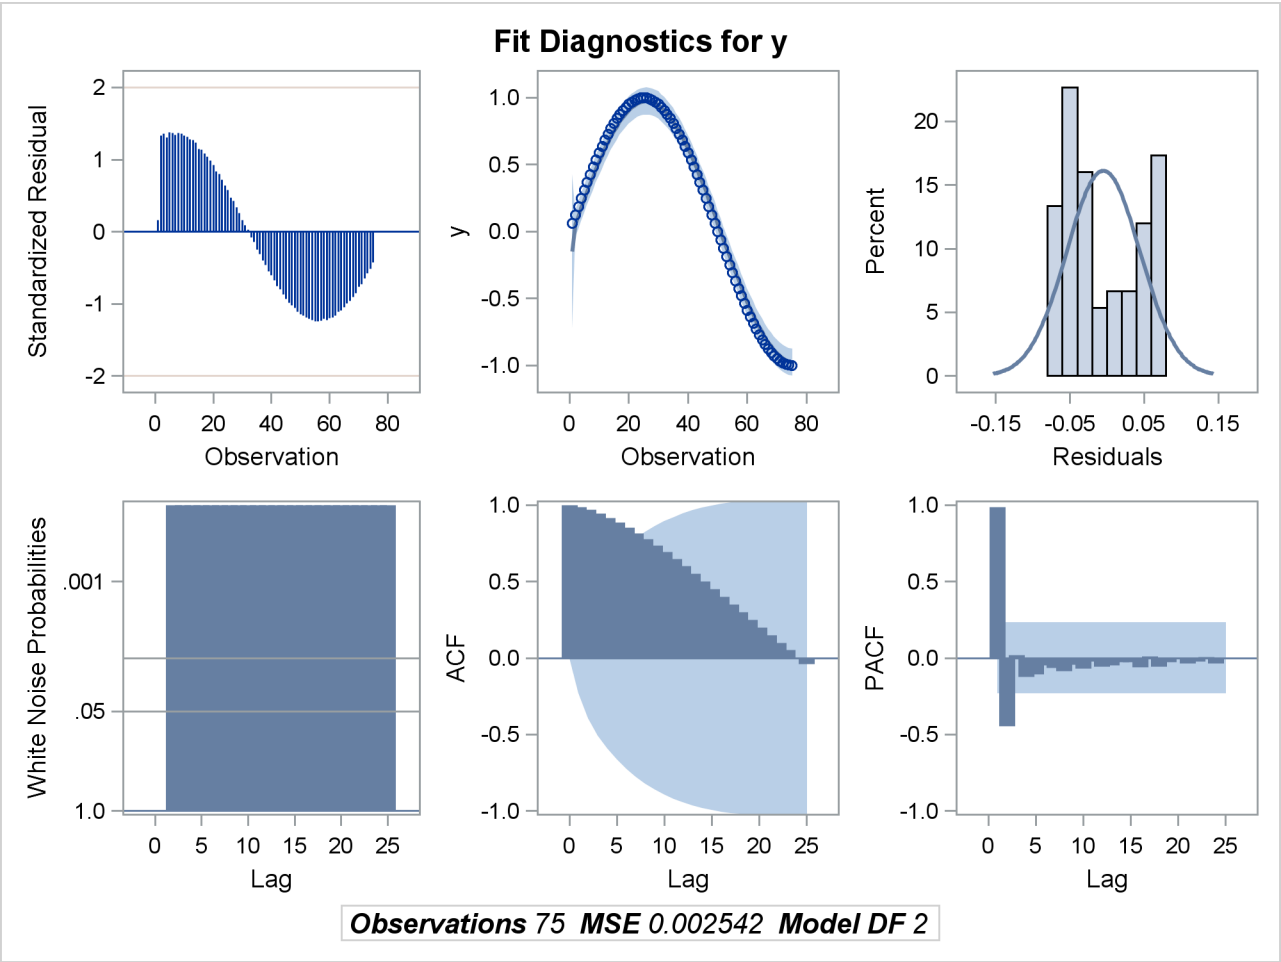
Output 8.3.2 Regression Results with AR(1) Error Correction

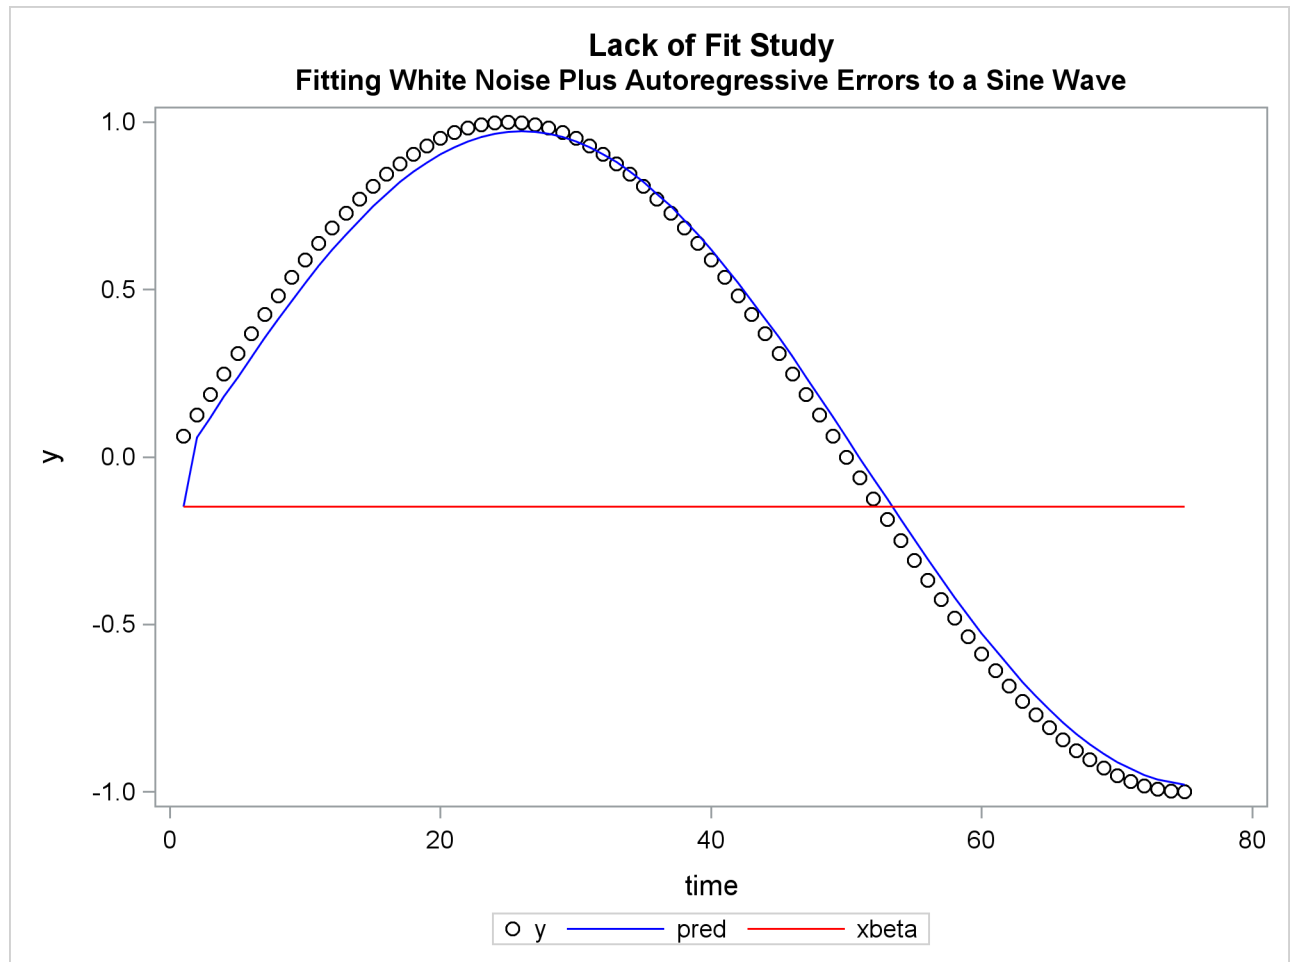
Estimates of Autoregressive Parameters			
Lag	Coefficient	Standard Error	t Value
1	-0.976386	0.025460	-38.35
Yule-Walker Estimates			
SSE	0.18304264	DFE	72
MSE	0.00254	Root MSE	0.05042
SBC	-222.30643	AIC	-229.2589
MAE	0.04551667	AICC	-228.92087
MAPE	29145.3526	HQC	-226.48285
Durbin-Watson	0.0942	Regress R-Square	0.0001
		Total R-Square	0.9947

Output 8.3.2 continued

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-0.1473	0.1702	-0.87	0.3898
x	1	-0.001219	0.0141	-0.09	0.9315

Output 8.3.3 Diagnostics Plots



Output 8.3.4 Plot of Autoregressive Prediction

Example 8.4: Missing Values

In this example, a pure autoregressive error model with no regressors is used to generate 50 values of a time series. Approximately 15% of the values are randomly chosen and set to missing. The following statements generate the data:

```

title  'Simulated Time Series with Roots: ';
title2 ' (X-1.25)(X**4-1.25)';
title3 'With 15% Missing Values';
data ar;
  do i=1 to 550;
    e = rannor(12345);
    n = sum( e, .8*n1, .8*n4, -.64*n5 );  /* ar process */
    y = n;
    if ranuni(12345) > .85 then y = .;    /* 15% missing */
    n5=n4; n4=n3; n3=n2; n2=n1; n1=n;    /* set lags   */
    if i>500 then output;
  end;
run;

```

The model is estimated using maximum likelihood, and the residuals are plotted with 99% confidence limits. The PARTIAL option prints the partial autocorrelations. The following statements fit the model:

```

proc autoreg data=ar partial;
  model y = / nlag=(1 4 5) method=ml;
  output out=a predicted=p residual=r ucl=u lcl=l alphacli=.01;
run;

```

The printed output produced by the AUTOREG procedure is shown in [Output 8.4.1](#) and [Output 8.4.2](#). Note: the plot [Output 8.4.2](#) can be viewed in the Autoreg.Model.FitDiagnosticPlots category by selecting **View►Results**.

Output 8.4.1 Autocorrelation-Corrected Regression Results

Simulated Time Series with Roots:
(X-1.25) (X**4-1.25)
With 15% Missing Values

The AUTOREG Procedure

Dependent Variable y

Ordinary Least Squares Estimates

SSE	182.972379	DFE	40
MSE	4.57431	Root MSE	2.13876
SBC	181.39282	AIC	179.679248
MAE	1.80469152	AICC	179.781813
MAPE	270.104379	HQC	180.303237
Durbin-Watson	1.3962	Regress R-Square	0.0000
		Total R-Square	0.0000

Parameter Estimates

Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-2.2387	0.3340	-6.70	<.0001

Estimates of Autocorrelations

[illegible]

Partial Autocorrelations

1	0.319109
4	0.619288
5	-0.821179

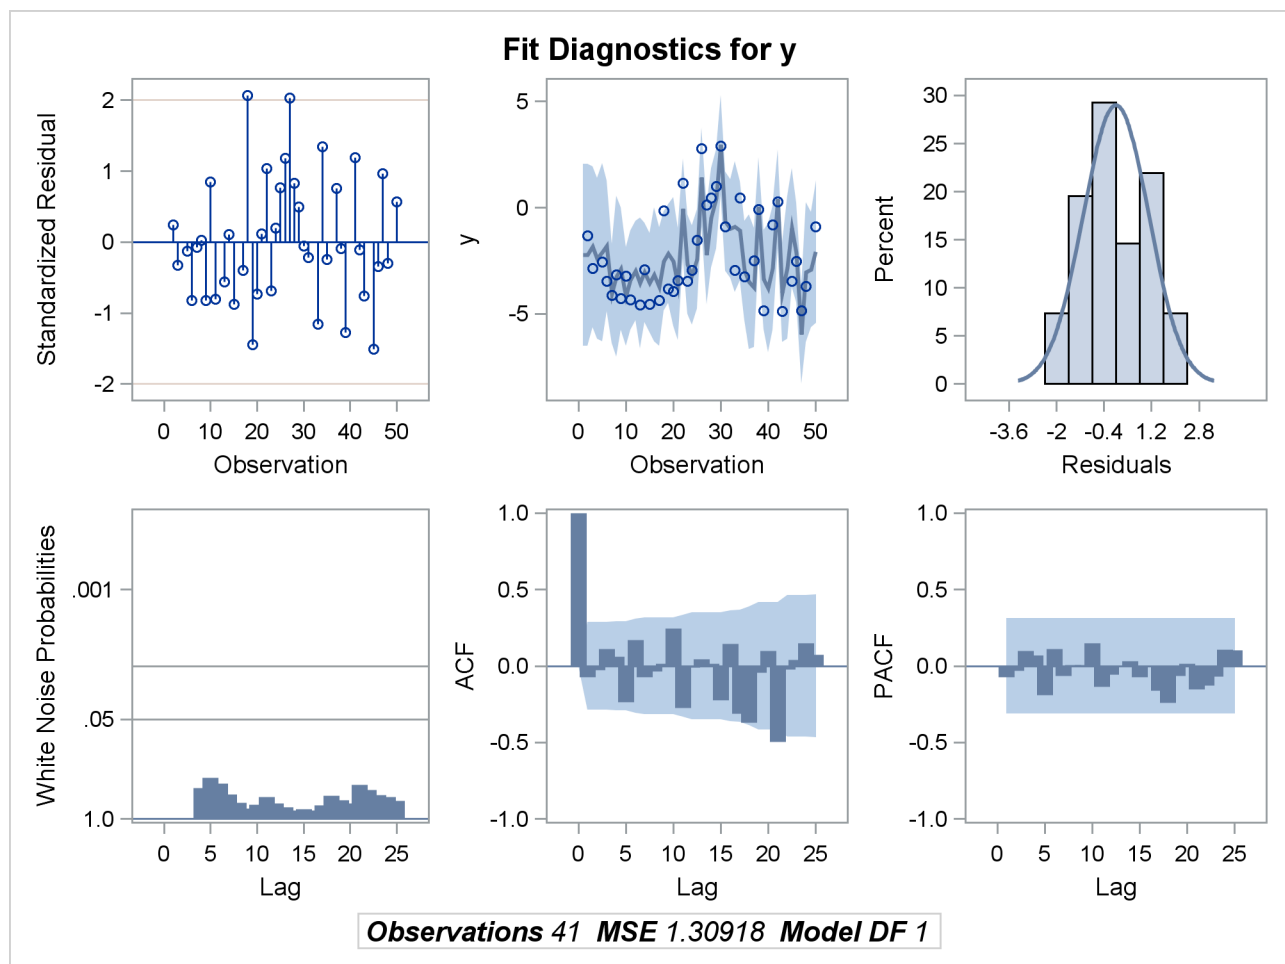
Output 8.4.1 *continued*

Preliminary MSE		0.7609			
Estimates of Autoregressive Parameters					
Lag	Coefficient	Standard Error	t Value		
1	-0.733182	0.089966	-8.15		
4	-0.803754	0.071849	-11.19		
5	0.821179	0.093818	8.75		
Expected Autocorrelations					
Lag	Autocorr				
0	1.0000				
1	0.4204				
2	0.2480				
3	0.3160				
4	0.6903				
5	0.0228				
Algorithm converged.					
Maximum Likelihood Estimates					
SSE	48.4396756	DFE	37		
MSE	1.30918	Root MSE	1.14419		
SBC	146.879013	AIC	140.024725		
MAE	0.88786192	AICC	141.135836		
MAPE	141.377721	HQC	142.520679		
Log Likelihood	-66.012362	Regress R-Square	0.0000		
Durbin-Watson	2.9457	Total R-Square	0.7353		
		Observations	41		
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-2.2370	0.5239	-4.27	0.0001
AR1	1	-0.6201	0.1129	-5.49	<.0001
AR4	1	-0.7237	0.0914	-7.92	<.0001
AR5	1	0.6550	0.1202	5.45	<.0001

Output 8.4.1 *continued*

Expected Autocorrelations					
	Lag	Autocorr			
	0	1.0000			
	1	0.4204			
	2	0.2423			
	3	0.2958			
	4	0.6318			
	5	0.0411			
Autoregressive parameters assumed given					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-2.2370	0.5225	-4.28	0.0001

Output 8.4.2 Diagnostic Plots



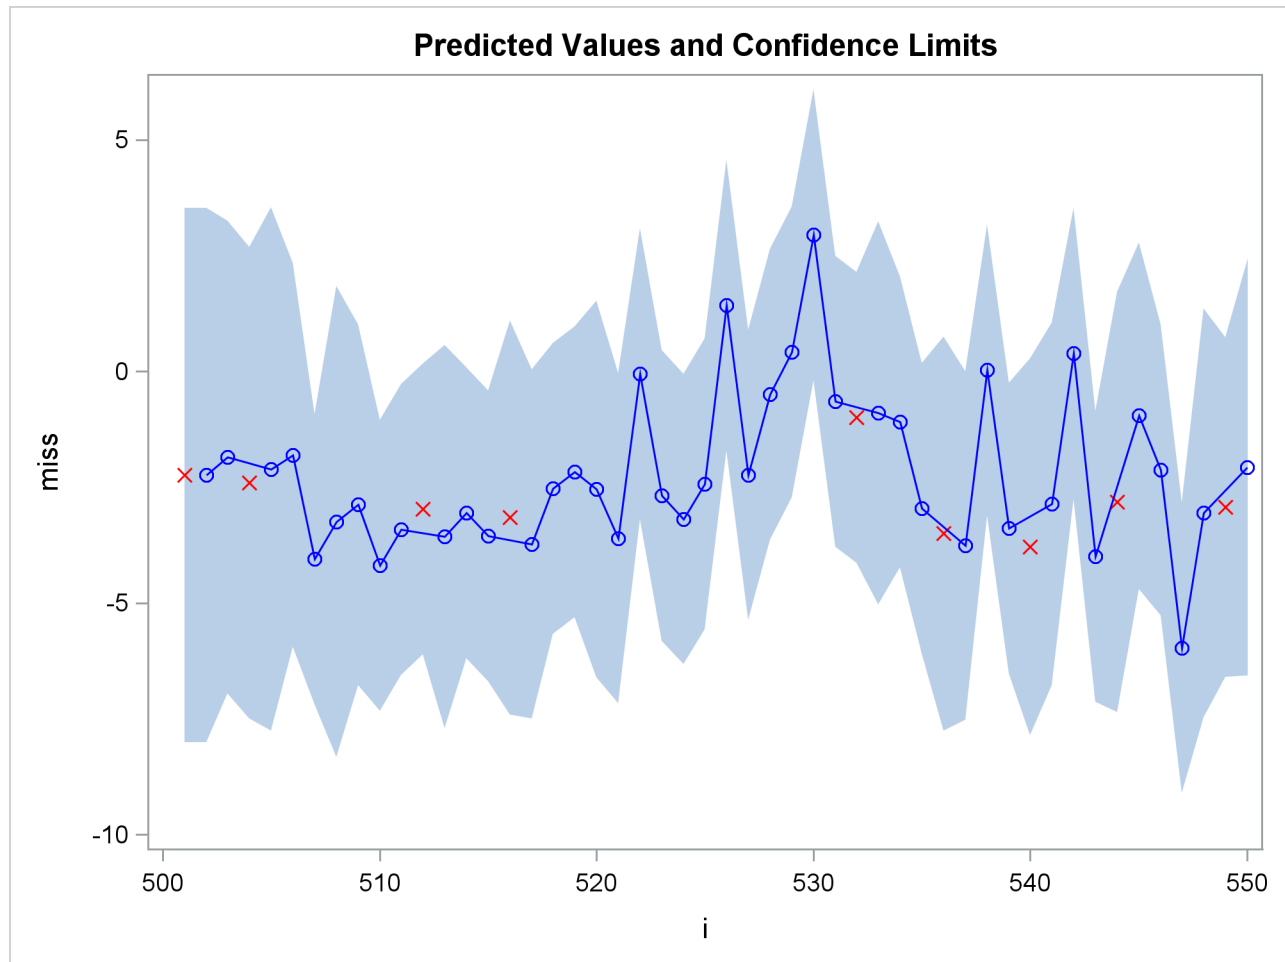
The following statements plot the residuals and confidence limits:

```
data reshape1;
  set a;
  miss = .;
  if r=. then do;
    miss = p;
    p = .;
  end;
run;

title 'Predicted Values and Confidence Limits';

proc sgplot data=reshape1 NOAUTOLEGEND;
  band x=i upper=u lower=l;
  scatter y=miss x=i/ MARKERATTRS =(symbol=x color=red);
  series y=p x=i/markers MARKERATTRS =(color=blue) lineattrs=(color=blue);
run;
```

The plot of the predicted values and the upper and lower confidence limits is shown in [Output 8.4.3](#). Note that the confidence interval is wider at the beginning of the series (when there are no past noise values to use in the forecast equation) and after missing values where, again, there is an incomplete set of past residuals.

Output 8.4.3 Plot of Predicted Values and Confidence Interval

Example 8.5: Money Demand Model

This example estimates the log-log money demand equation by using the maximum likelihood method. The money demand model contains four explanatory variables. The lagged nominal money stock M1 is divided by the current price level GDF to calculate a new variable M1CP since the money stock is assumed to follow the partial adjustment process. The variable M1CP is then used to estimate the coefficient of adjustment. All variables are transformed using the natural logarithm with a DATA step. Refer to Balke and Gordon (1986) for a data description.

The first eight observations are printed using the PRINT procedure and are shown in [Output 8.5.1](#). Note that the first observation of the variables M1CP and INFR are missing. Therefore, the money demand equation is estimated for the period 1968:2 to 1983:4 since PROC AUTOREG ignores the first missing observation. The DATA step that follows generates the transformed variables.

```

data money;
  date = intnx( 'qtr', '01jan1968'd, _n_-1 );
  format date yyqc6.;
  input m1 gnp gdf ycb @@;
  m = log( 100 * m1 / gdf );
  mlcp = log( 100 * lag(m1) / gdf );
  y = log( gnp );
  intr = log( ycb );
  infr = 100 * log( gdf / lag(gdf) );
  label m      = 'Real Money Stock (M1)'
        mlcp   = 'Lagged M1/Current GDF'
        y      = 'Real GNP'
        intr    = 'Yield on Corporate Bonds'
        infr    = 'Rate of Prices Changes';
datalines;

... more lines ...

```

Output 8.5.1 Money Demand Data Series – First 8 Observations

Predicted Values and Confidence Limits										
Obs	date	m1	gnp	gdf	ycb	m	mlcp	y	intr	infr
1	1968:1	187.15	1036.22	81.18	6.84	5.44041	.	6.94333	1.92279	.
2	1968:2	190.63	1056.02	82.12	6.97	5.44732	5.42890	6.96226	1.94162	1.15127
3	1968:3	194.30	1068.72	82.80	6.98	5.45815	5.43908	6.97422	1.94305	0.82465
4	1968:4	198.55	1071.28	84.04	6.84	5.46492	5.44328	6.97661	1.92279	1.48648
5	1969:1	201.73	1084.15	84.97	7.32	5.46980	5.45391	6.98855	1.99061	1.10054
6	1969:2	203.18	1088.73	86.10	7.54	5.46375	5.45659	6.99277	2.02022	1.32112
7	1969:3	204.18	1091.90	87.49	7.70	5.45265	5.44774	6.99567	2.04122	1.60151
8	1969:4	206.10	1085.53	88.62	8.22	5.44917	5.43981	6.98982	2.10657	1.28331

The money demand equation is first estimated using OLS. The DW=4 option produces generalized Durbin-Watson statistics up to the fourth order. Their exact marginal probabilities (p -values) are also calculated with the DWPROB option. The Durbin-Watson test indicates positive first-order autocorrelation at, say, the 10% confidence level. You can use the Durbin-Watson table, which is available only for 1% and 5% significance points. The relevant upper (d_U) and lower (d_L) bounds are $d_U = 1.731$ and $d_L = 1.471$, respectively, at 5% significance level. However, the bounds test is inconvenient, since sometimes you may get the statistic in the inconclusive region while the interval between the upper and lower bounds becomes smaller with the increasing sample size. The PROC step follows:

```

title 'Partial Adjustment Money Demand Equation';
title2 'Quarterly Data - 1968:2 to 1983:4';

proc autoreg data=money outest=est covout;
  model m = mlcp y intr infr / dw=4 dwprob;
run;

```


Output 8.5.2 OLS Estimation of the Partial Adjustment Money Demand Equation

Partial Adjustment Money Demand Equation					
Quarterly Data - 1968:2 to 1983:4					
The AUTOREG Procedure					
Dependent Variable			m		
			Real Money Stock (M1)		
Ordinary Least Squares Estimates					
SSE	0.00271902	DFE		58	
MSE	0.0000469	Root MSE		0.00685	
SBC	-433.68709	AIC		-444.40276	
MAE	0.00483389	AICC		-443.35013	
MAPE	0.08888324	HQC		-440.18824	
				Regress R-Square	0.9546
				Total R-Square	0.9546
Durbin-Watson Statistics					
Order	DW	Pr < DW	Pr > DW		
1	1.7355	0.0607	0.9393		
2	2.1058	0.5519	0.4481		
3	2.0286	0.5002	0.4998		
4	2.2835	0.8880	0.1120		
NOTE: Pr<DW is the p-value for testing positive autocorrelation, and Pr>DW is the p-value for testing negative autocorrelation.					
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.3084	0.2359	1.31	0.1963
mlcp	1	0.8952	0.0439	20.38	<.0001
y	1	0.0476	0.0122	3.89	0.0003
intr	1	-0.0238	0.007933	-3.00	0.0040
infr	1	-0.005646	0.001584	-3.56	0.0007
		Variable Label			
		Lagged M1/Current GDF			
		Real GNP			
		Yield on Corporate Bonds			
		Rate of Prices Changes			

The autoregressive model is estimated using the maximum likelihood method. Though the Durbin-Watson test statistic is calculated after correcting the autocorrelation, it should be used with care since the test based on this statistic is not justified theoretically. The PROC step follows:

```
proc autoreg data=money;
  model m = mlcp y intr infr / nlag=1 method=ml maxit=50;
  output out=a p=p pm=pm r=r rm=rm ucl=ucl lcl=lcl
    uclm=uclm lclm=lclm;
run;

proc print data=a(obs=8);
  var p pm r rm ucl lcl uclm lclm;
run;
```

A difference is shown between the OLS estimates in [Output 8.5.2](#) and the AR(1)-ML estimates in [Output 8.5.3](#). The estimated autocorrelation coefficient is significantly negative (-0.88345). Note that the negative coefficient of AR(1) should be interpreted as a positive autocorrelation.

Two predicted values are produced: predicted values computed for the structural model and predicted values computed for the full model. The full model includes both the structural and error-process parts. The predicted values and residuals are stored in the output data set A, as are the upper and lower 95% confidence limits for the predicted values. Part of the data set A is shown in [Output 8.5.4](#). The first observation is missing since the explanatory variables, M1CP and INFR, are missing for the corresponding observation.

Output 8.5.3 Estimated Partial Adjustment Money Demand Equation

Partial Adjustment Money Demand Equation			
Quarterly Data - 1968:2 to 1983:4			
The AUTOREG Procedure			
Estimates of Autoregressive Parameters			
Lag	Coefficient	Standard Error	t Value
1	-0.126273	0.131393	-0.96
Algorithm converged.			
Maximum Likelihood Estimates			
SSE	0.00226719	DFE	57
MSE	0.0000398	Root MSE	0.00631
SBC	-439.47665	AIC	-452.33545
MAE	0.00506044	AICC	-450.83545
MAPE	0.09302277	HQC	-447.27802
Log Likelihood	232.167727	Regress R-Square	0.6954
Durbin-Watson	2.1778	Total R-Square	0.9621
		Observations	63

Output 8.5.3 *continued*

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	2.4121	0.4880	4.94	<.0001	
mlcp	1	0.4086	0.0908	4.50	<.0001	Lagged M1/Current GDF
y	1	0.1509	0.0411	3.67	0.0005	Real GNP
intr	1	-0.1101	0.0159	-6.92	<.0001	Yield on Corporate Bonds
infr	1	-0.006348	0.001834	-3.46	0.0010	Rate of Prices Changes
AR1	1	-0.8835	0.0686	-12.89	<.0001	
Autoregressive parameters assumed given						
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t	Variable Label
Intercept	1	2.4121	0.4685	5.15	<.0001	
mlcp	1	0.4086	0.0840	4.87	<.0001	Lagged M1/Current GDF
y	1	0.1509	0.0402	3.75	0.0004	Real GNP
intr	1	-0.1101	0.0155	-7.08	<.0001	Yield on Corporate Bonds
infr	1	-0.006348	0.001828	-3.47	0.0010	Rate of Prices Changes

Output 8.5.4 Partial List of the Predicted Values

Partial Adjustment Money Demand Equation Quarterly Data - 1968:2 to 1983:4								
Obs	p	pm	r	rm	ucl	lcl	uclm	lclm
1
2	5.45962	5.45962	-.005763043	-0.012301	5.49319	5.42606	5.47962	5.43962
3	5.45663	5.46750	0.001511258	-0.009356	5.46954	5.44373	5.48700	5.44800
4	5.45934	5.46761	0.005574104	-0.002691	5.47243	5.44626	5.48723	5.44799
5	5.46636	5.46874	0.003442075	0.001064	5.47944	5.45328	5.48757	5.44991
6	5.46675	5.46581	-.002994443	-0.002054	5.47959	5.45390	5.48444	5.44718
7	5.45672	5.45854	-.004074196	-0.005889	5.46956	5.44388	5.47667	5.44040
8	5.44404	5.44924	0.005136019	-0.000066	5.45704	5.43103	5.46726	5.43122

Example 8.6: Estimation of ARCH(2) Process

Stock returns show a tendency for small changes to be followed by small changes while large changes are followed by large changes. The plot of daily price changes of IBM common stock (Box and Jenkins 1976, p. 527) is shown in [Output 8.6.1](#). The time series look serially uncorrelated, but the plot makes us skeptical of their independence.

With the following DATA step, the stock (capital) returns are computed from the closing prices. To forecast the conditional variance, an additional 46 observations with missing values are generated.

```

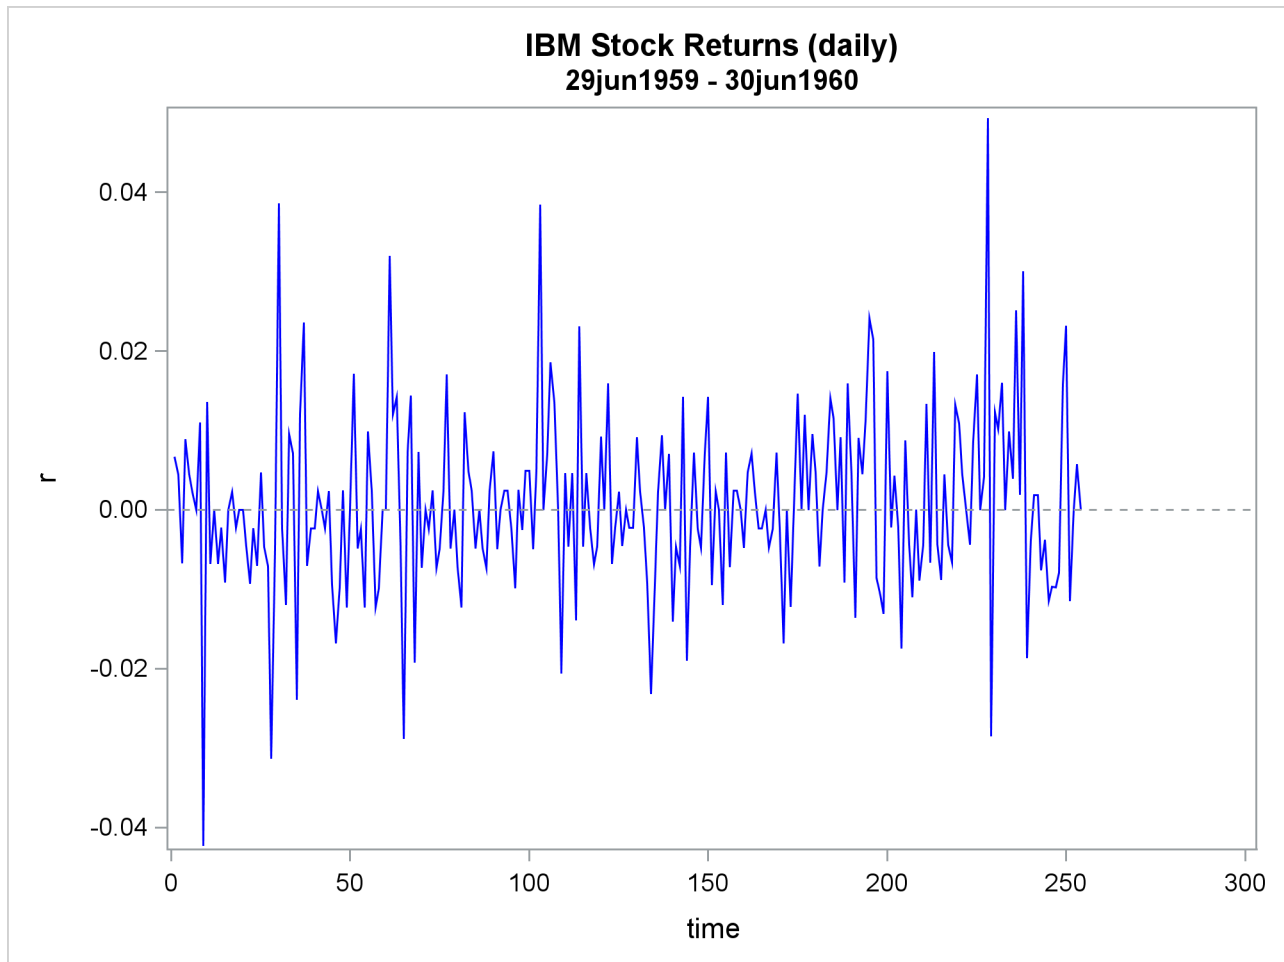
title 'IBM Stock Returns (daily)';
title2 '29jun1959 - 30jun1960';

data ibm;
    infile datalines eof=last;
    input x @@;
    r = dif( log( x ) );
    time = _n_-1;
    output;
    return;
last:
    do i = 1 to 46;
        r = .;
        time + 1;
        output;
    end;
    return;
datalines;

    ... more lines ...

proc sgplot data=ibm;
    series y=r x=time/lineattrs=(color=blue);
    refline 0/ axis = y LINEATTRS = (pattern=ShortDash);
run;

```

Output 8.6.1 IBM Stock Returns: Daily

The simple ARCH(2) model is estimated using the AUTOREG procedure. The MODEL statement option GARCH=(Q=2) specifies the ARCH(2) model. The OUTPUT statement with the CEV= option produces the conditional variances V. The conditional variance and its forecast are calculated using parameter estimates:

$$h_t = \hat{\omega} + \hat{\alpha}_1 \epsilon_{t-1}^2 + \hat{\alpha}_2 \epsilon_{t-2}^2$$

$$\mathbf{E}(\epsilon_{t+d}^2 | \Psi_t) = \hat{\omega} + \sum_{i=1}^2 \hat{\alpha}_i \mathbf{E}(\epsilon_{t+d-i}^2 | \Psi_t)$$

where $d > 1$. This model can be estimated as follows:

```
proc autoreg data=ibm maxit=50;
  model r = / noint garch=(q=2);
  output out=a cev=v;
run;
```

The parameter estimates for ω , α_1 , and α_2 are 0.00011, 0.04136, and 0.06976, respectively. The normality test indicates that the conditional normal distribution may not fully explain the leptokurtosis in the stock returns (Bollerslev 1987).

The ARCH model estimates are shown in [Output 8.6.2](#), and conditional variances are also shown in [Output 8.6.3](#). The code that generates [Output 8.6.3](#) is shown below.

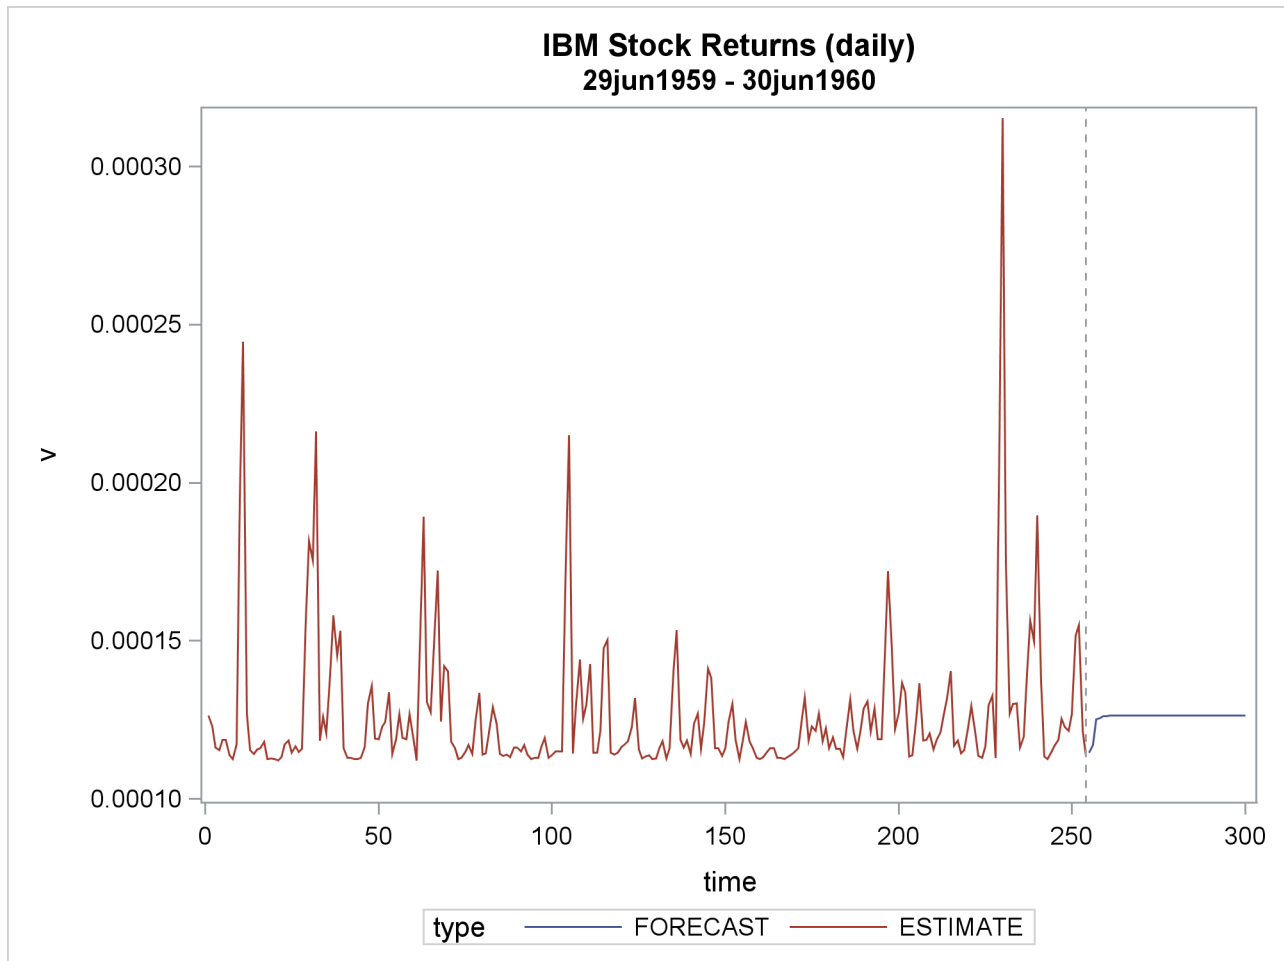
```
data b; set a;
  length type $ 8.;
  if r ^= . then do;
    type = 'ESTIMATE'; output; end;
  else do;
    type = 'FORECAST'; output; end;
run;
proc sgplot data=b;
  series x=time y=v/group=type;
  refline 254/ axis = x LINEATTRS = (pattern=ShortDash);
run;
```

Output 8.6.2 ARCH(2) Estimation Results

IBM Stock Returns (daily)			
29jun1959 - 30jun1960			
The AUTOREG Procedure			
Dependent Variable		r	
Ordinary Least Squares Estimates			
SSE	0.03214307	DFE	254
MSE	0.0001265	Root MSE	0.01125
SBC	-1558.802	AIC	-1558.802
MAE	0.00814086	AICC	-1558.802
MAPE	100.378566	HQC	-1558.802
Durbin-Watson	2.1377	Regress R-Square	0.0000
		Total R-Square	0.0000
NOTE: No intercept term is used. R-squares are redefined.			
Algorithm converged.			
GARCH Estimates			
SSE	0.03214307	Observations	254
MSE	0.0001265	Uncond Var	0.00012632
Log Likelihood	781.017441	Total R-Square	0.0000
SBC	-1545.4229	AIC	-1556.0349
MAE	0.00805675	AICC	-1555.9389
MAPE	100	HQC	-1551.7658
		Normality Test	105.8587
		Pr > ChiSq	<.0001
NOTE: No intercept term is used. R-squares are redefined.			

Output 8.6.2 *continued*

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
ARCH0	1	0.000112	7.6059E-6	14.76	<.0001
ARCH1	1	0.0414	0.0514	0.81	0.4208
ARCH2	1	0.0698	0.0434	1.61	0.1082

Output 8.6.3 Conditional Variance for IBM Stock Prices**Example 8.7: Estimation of GARCH-Type Models**

This example extends [Example 8.6](#) to include more volatility models and to perform model selection and diagnostics.

Following is the data of daily IBM stock prices for the long period from 1962 to 2009.

```

data ibm_long;
  infile datalines;
  format date MMDDYY10.;
  input date:MMDDYY10. price_ibm;
  r = 100*dif( log( price_ibm ) );
datalines;
01/02/1962 2.68
01/03/1962 2.7
01/04/1962 2.67
01/05/1962 2.62

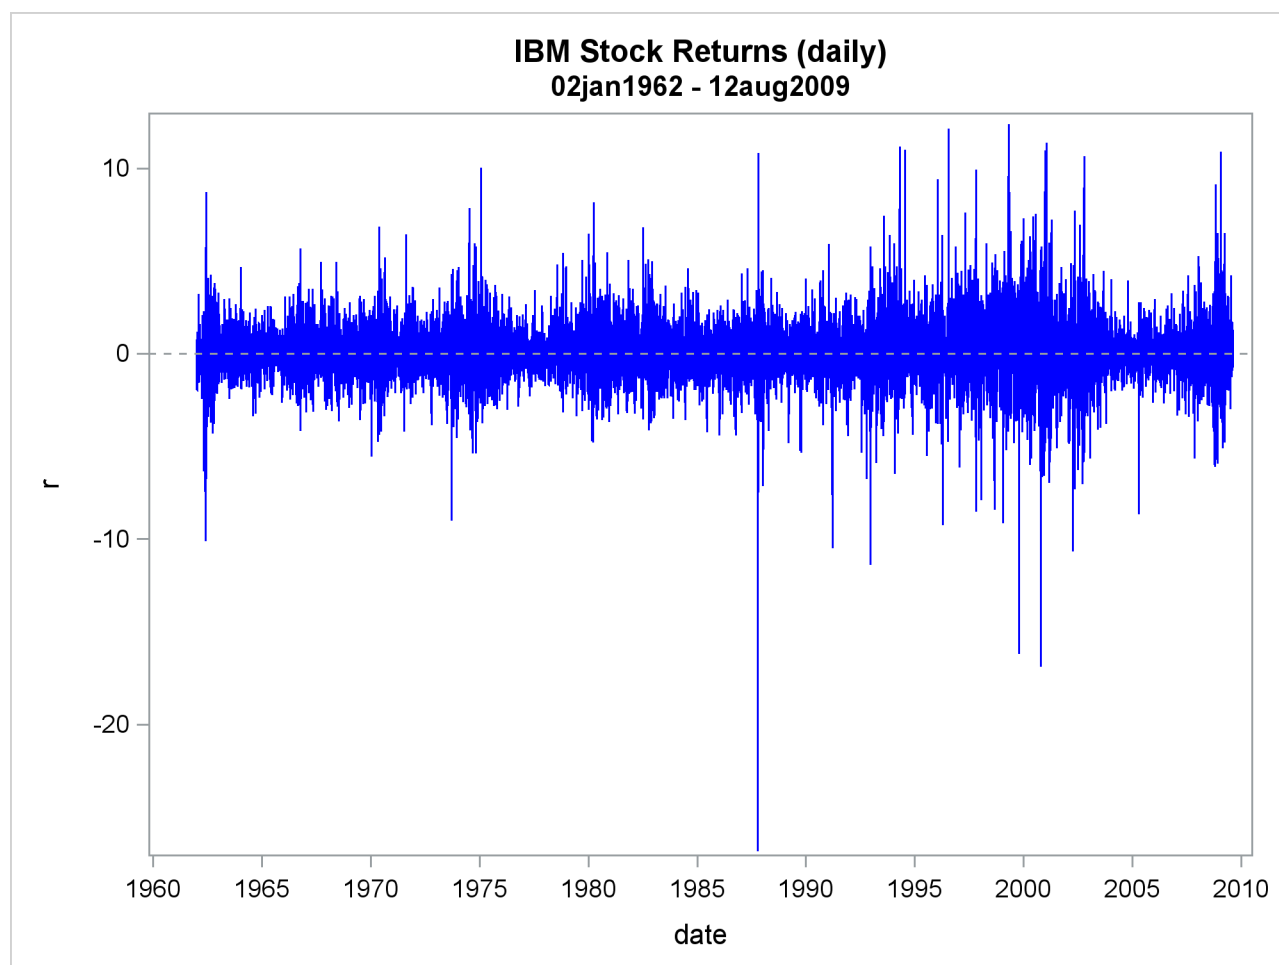
... more lines ...

08/12/2009 119.29
;

```

The time series of IBM returns is depicted graphically in [Output 8.7.1](#).

Output 8.7.1 IBM Stock Returns: Daily



The following statements perform estimation of different kinds of GARCH-type models. First, ODS list-

ing output that contains fit summary tables for each single model is captured by using an ODS OUTPUT statement with the appropriate ODS table name assigned to a new SAS data set. Along with these new data sets, another one that contains parameter estimates is created by using the OUTEST= option in AUTOREG statement.

```

/* Capturing ODS tables into SAS data sets */
ods output Autoreg.ar_1.FinalModel.FitSummary
           =fitsum_ar_1;
ods output Autoreg.arch_2.FinalModel.Results.FitSummary
           =fitsum_arch_2;
ods output Autoreg.garch_1_1.FinalModel.Results.FitSummary
           =fitsum_garch_1_1;
ods output Autoreg.st_garch_1_1.FinalModel.Results.FitSummary
           =fitsum_st_garch_1_1;
ods output Autoreg.ar_1_garch_1_1.FinalModel.Results.FitSummary
           =fitsum_ar_1_garch_1_1;
ods output Autoreg.igarch_1_1.FinalModel.Results.FitSummary
           =fitsum_igarch_1_1;
ods output Autoreg.garchm_1_1.FinalModel.Results.FitSummary
           =fitsum_garchm_1_1;
ods output Autoreg.egarch_1_1.FinalModel.Results.FitSummary
           =fitsum_egarch_1_1;
ods output Autoreg.qgarch_1_1.FinalModel.Results.FitSummary
           =fitsum_qgarch_1_1;
ods output Autoreg.tgarch_1_1.FinalModel.Results.FitSummary
           =fitsum_tgarch_1_1;
ods output Autoreg.pgarch_1_1.FinalModel.Results.FitSummary
           =fitsum_pgarch_1_1;

/* Estimating multiple GARCH-type models */
title "GARCH family";
proc autoreg data=ibm_long outest=garch_family;
  ar_1 :      model r = / noint nlag=1 method=ml;
  arch_2 :    model r = / noint garch=(q=2);
  garch_1_1 : model r = / noint garch=(p=1,q=1);
  st_garch_1_1 : model r = / noint garch=(p=1,q=1,type=stationary);
  ar_1_garch_1_1 : model r = / noint nlag=1 garch=(p=1,q=1);
  igarch_1_1 : model r = / noint garch=(p=1,q=1,type=integ,noint);
  egarch_1_1 : model r = / noint garch=(p=1,q=1,type=egarch);
  garchm_1_1 : model r = / noint garch=(p=1,q=1,mean=log);
  qgarch_1_1 : model r = / noint garch=(p=1,q=1,type=qgarch);
  tgarch_1_1 : model r = / noint garch=(p=1,q=1,type=tgarch);
  pgarch_1_1 : model r = / noint garch=(p=1,q=1,type=pgarch);
run;

```

The following statements print partial contents of the data set GARCH_FAMILY. The columns of interest are explicitly specified in the VAR statement.

```

/* Printing summary table of parameter estimates */
title "Parameter Estimates for Different Models";
proc print data=garch_family;
  var _MODEL_ _A_1 _AH_0 _AH_1 _AH_2
      _GH_1 _AHQ_1 _AHT_1 _AHP_1 _THETA_ _LAMBDA_ _DELTA_;
run;

```

These statements produce the results shown in [Output 8.7.2](#).

Output 8.7.2 GARCH-Family Estimation Results

Parameter Estimates for Different Models						
Obs	_MODEL_	_A_1	_AH_0	_AH_1	_AH_2	_GH_1
1	ar_1	0.017112
2	arch_2	.	1.60288	0.23235	0.21407	.
3	garch_1_1	.	0.02730	0.06984	.	0.92294
4	st_garch_1_1	.	0.02831	0.06913	.	0.92260
5	ar_1_garch_1_1	-0.005995	0.02734	0.06994	.	0.92282
6	igarch_1_1	.	.	0.00000	.	1.00000
7	egarch_1_1	.	0.01541	0.12882	.	0.98914
8	garchm_1_1	.	0.02897	0.07139	.	0.92079
9	qgarch_1_1	.	0.00120	0.05792	.	0.93458
10	tgarch_1_1	.	0.02706	0.02966	.	0.92765
11	pgarch_1_1	.	0.01623	0.06724	.	0.93952

Obs	_AHQ_1	_AHT_1	_AHP_1	_THETA	_LAMBDA	_DELTA
1
2
3
4
5
6
7	.	.	.	-0.41706	.	.
8	0.094773
9	0.66461
10	.	0.074815
11	.	.	0.43445	.	0.53625	.

The table shown in [Output 8.7.2](#) is convenient for reporting the estimation result of multiple models and their comparison.

The following statements merge multiple tables that contain fit statistics for each estimated model, leaving only columns of interest, and rename them.

```
/* Merging ODS output tables and extracting AIC and SBC measures */
data sbc_aic;
  set fitsum_arch_2 fitsum_garch_1_1 fitsum_st_garch_1_1
      fitsum_ar_1 fitsum_ar_1_garch_1_1 fitsum_igarch_1_1
      fitsum_egarch_1_1 fitsum_garchm_1_1
      fitsum_tgarch_1_1 fitsum_pgarch_1_1 fitsum_qgarch_1_1;
  keep Model SBC AIC;
  if Label1="SBC" then do; SBC=input(cValue1,BEST12.4); end;
  if Label2="SBC" then do; SBC=input(cValue2,BEST12.4); end;
  if Label1="AIC" then do; AIC=input(cValue1,BEST12.4); end;
  if Label2="AIC" then do; AIC=input(cValue2,BEST12.4); end;
  if not (SBC=.) then output;
run;
```

Next, sort the models by one of the criteria, for example, by AIC:

```
/* Sorting data by AIC criterion */
proc sort data=sbc_aic;
  by AIC;
run;
```

Finally, print the sorted data set:

```
title "Selection Criteria for Different Models";
proc print data=sbc_aic;
  format _NUMERIC_ BEST12.4;
run;
```

The result is given in [Output 8.7.3](#).

Output 8.7.3 GARCH-Family Model Selection on the Basis of AIC and SBC

Selection Criteria for Different Models			
Obs	Model	SBC	AIC
1	pgarch_1_1	42907.7292	42870.7722
2	egarch_1_1	42905.9616	42876.3959
3	tgarch_1_1	42995.4893	42965.9236
4	qgarch_1_1	43023.106	42993.5404
5	garchm_1_1	43158.4139	43128.8483
6	garch_1_1	43176.5074	43154.3332
7	ar_1_garch_1_1	43185.5226	43155.957
8	st_garch_1_1	43178.2497	43156.0755
9	arch_2	44605.4332	44583.259
10	ar_1	45922.0721	45914.6807
11	igarch_1_1	45925.5828	45918.1914

According to the smaller-is-better rule for the information criteria, the PGARCH(1,1) model is the leader by AIC while the EGARCH(1,1) is the model of choice according to SBC.

Next, check whether the power GARCH model is misspecified, especially, if dependence exists in the standardized residuals that correspond to the assumed independently and identically distributed (iid) disturbance. The following statements reestimate the power GARCH model and use the BDS test to check the independence of the standardized residuals.

```
proc autoreg data=ibm_long;
  model r = / noint garch=(p=1,q=1,type=pgarch) BDS=(Z=SR,D=2.0);
run;
```

The partial results listing of the preceding statements is given in [Output 8.7.4](#).

Output 8.7.4 Diagnostic Checking of the PGARCH(1,1) Model

Selection Criteria for Different Models			
The AUTOREG Procedure			
BDS Test for Independence			
Distance	Embedding Dimension	BDS	Pr > BDS
2.0000	2	2.9691	0.0030
	3	3.3810	0.0007
	4	3.1299	0.0017
	5	3.3805	0.0007
	6	3.3368	0.0008
	7	3.1888	0.0014
	8	2.9576	0.0031
	9	2.7386	0.0062
	10	2.5553	0.0106
	11	2.3510	0.0187
	12	2.1520	0.0314
	13	1.9373	0.0527
	14	1.7210	0.0852
	15	1.4919	0.1357
	16	1.2569	0.2088
	17	1.0647	0.2870
	18	0.9635	0.3353
	19	0.8678	0.3855
	20	0.7660	0.4437

The results in [Output 8.7.4](#) indicate that when embedded size is greater than 9, you fail to reject the null hypothesis of independence at 1% significance level, which is a good indicator that the PGARCH model is not misspecified.

Example 8.8: Illustration of ODS Graphics

This example illustrates the use of ODS GRAPHICS. This is a continuation of the section “[Forecasting Autoregressive Error Models](#)” on page 323.

These graphical displays are requested by specifying the ODS GRAPHICS statement. For information about the graphs available in the AUTOREG procedure, see the section “[ODS Graphics](#)” on page 409.

The following statements show how to generate ODS GRAPHICS plots with the AUTOREG procedure. In this case, all plots are requested using the ALL option in the PROC AUTOREG statement, in addition to the ODS GRAPHICS statement. The plots are displayed in [Output 8.8.1](#) through [Output 8.8.8](#). Note: these plots can be viewed in the Autoreg.Model.FitDiagnosticPlots category by selecting **View►Results**.

```

data a;
  ul = 0; ull = 0;
  do time = -10 to 36;
    u = + 1.3 * ul - .5 * ull + 2*rannor(12346);
    y = 10 + .5 * time + u;
    if time > 0 then output;
    ull = ul; ul = u;
  end;
run;

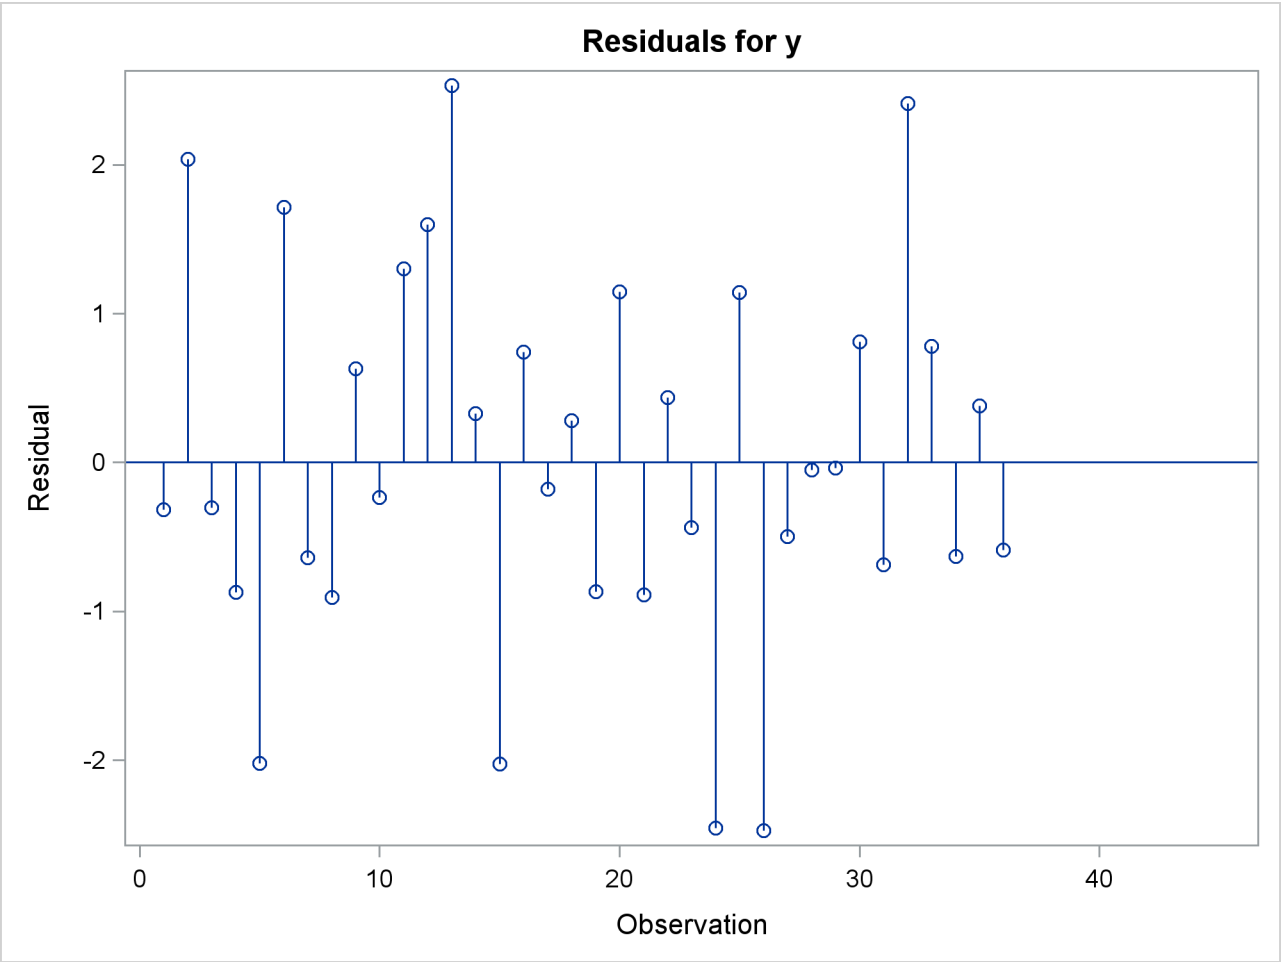
data b;
  y = .;
  do time = 37 to 46; output; end;
run;

data b;
  merge a b;
  by time;
run;

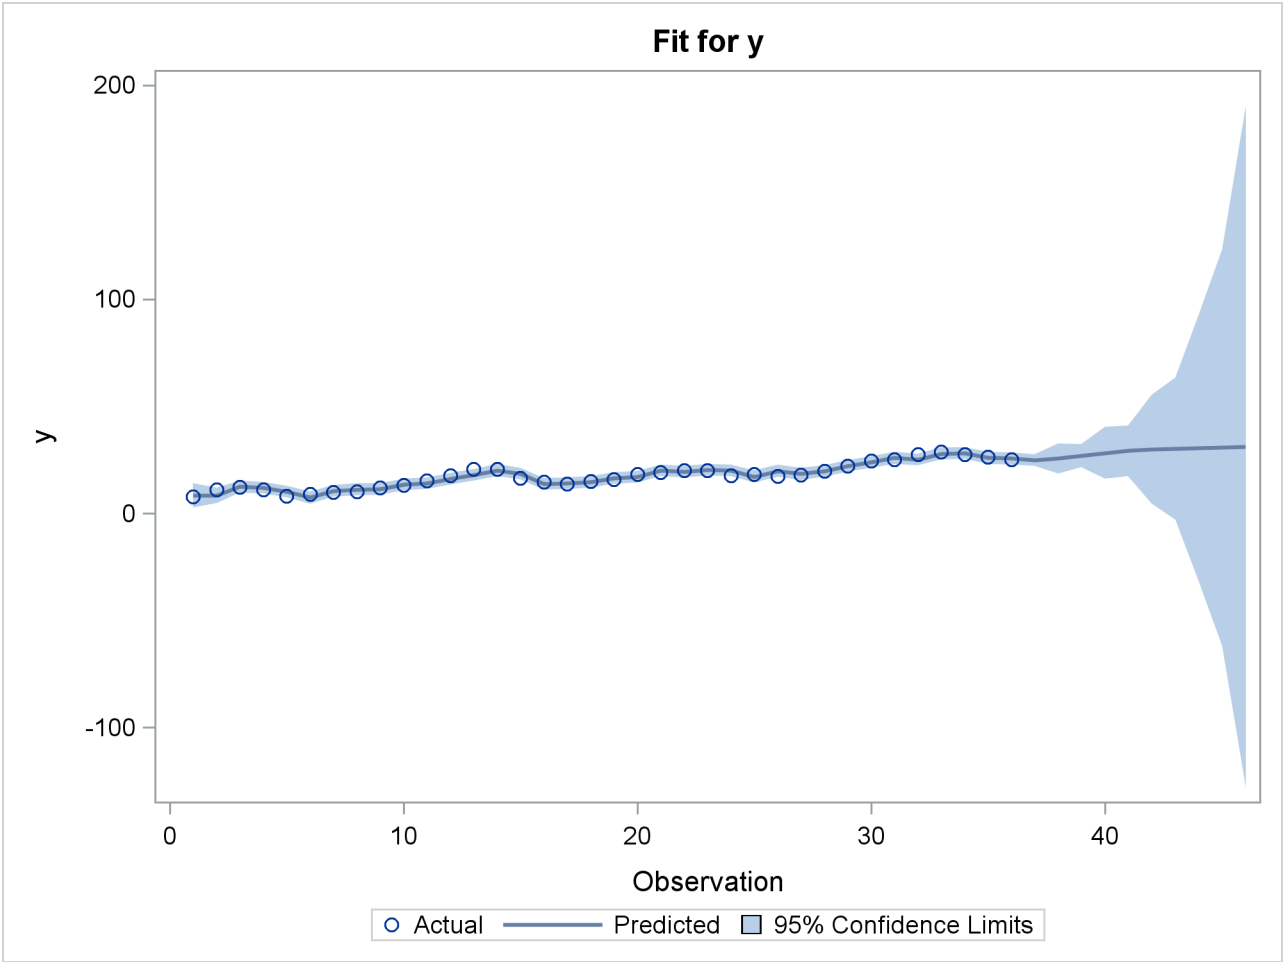
proc autoreg data=b all plots(unpack);
  model y = time / nlag=2 method=ml;
  output out=p p=yhat pm=ytrend
         lcl=lcl ucl=ucl;
run;

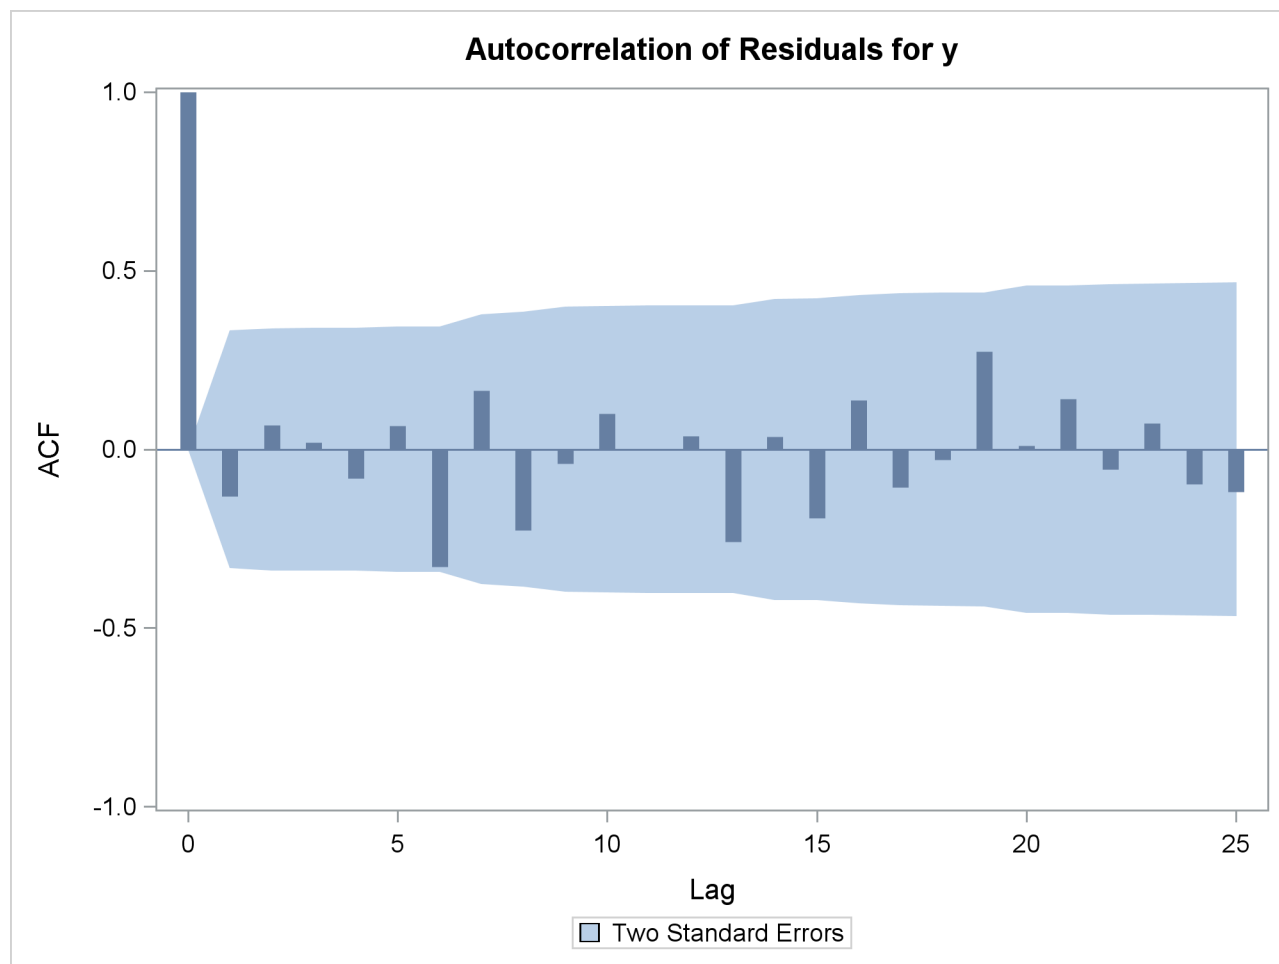
```

Output 8.8.1 Residuals Plot

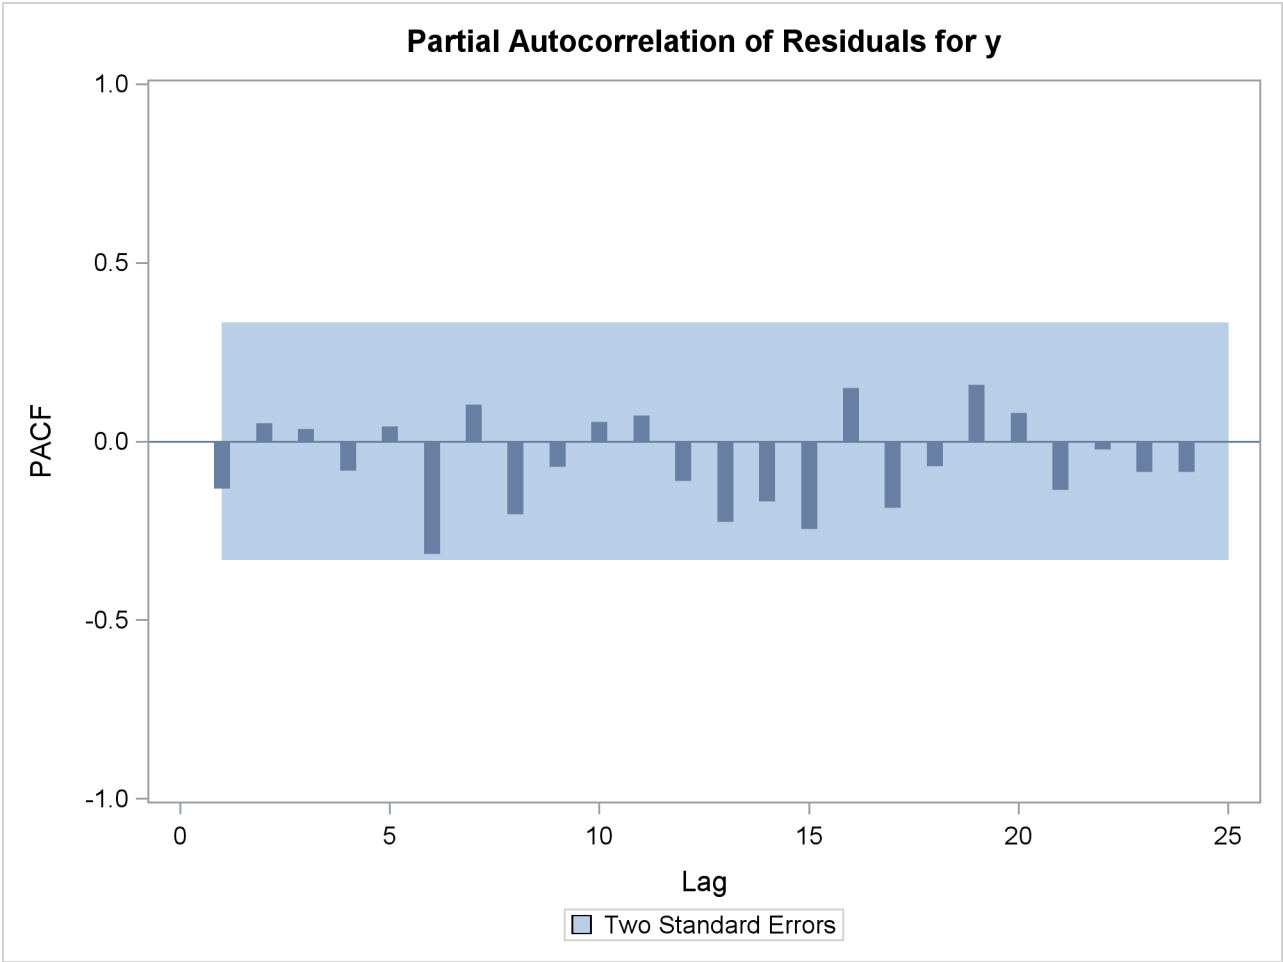


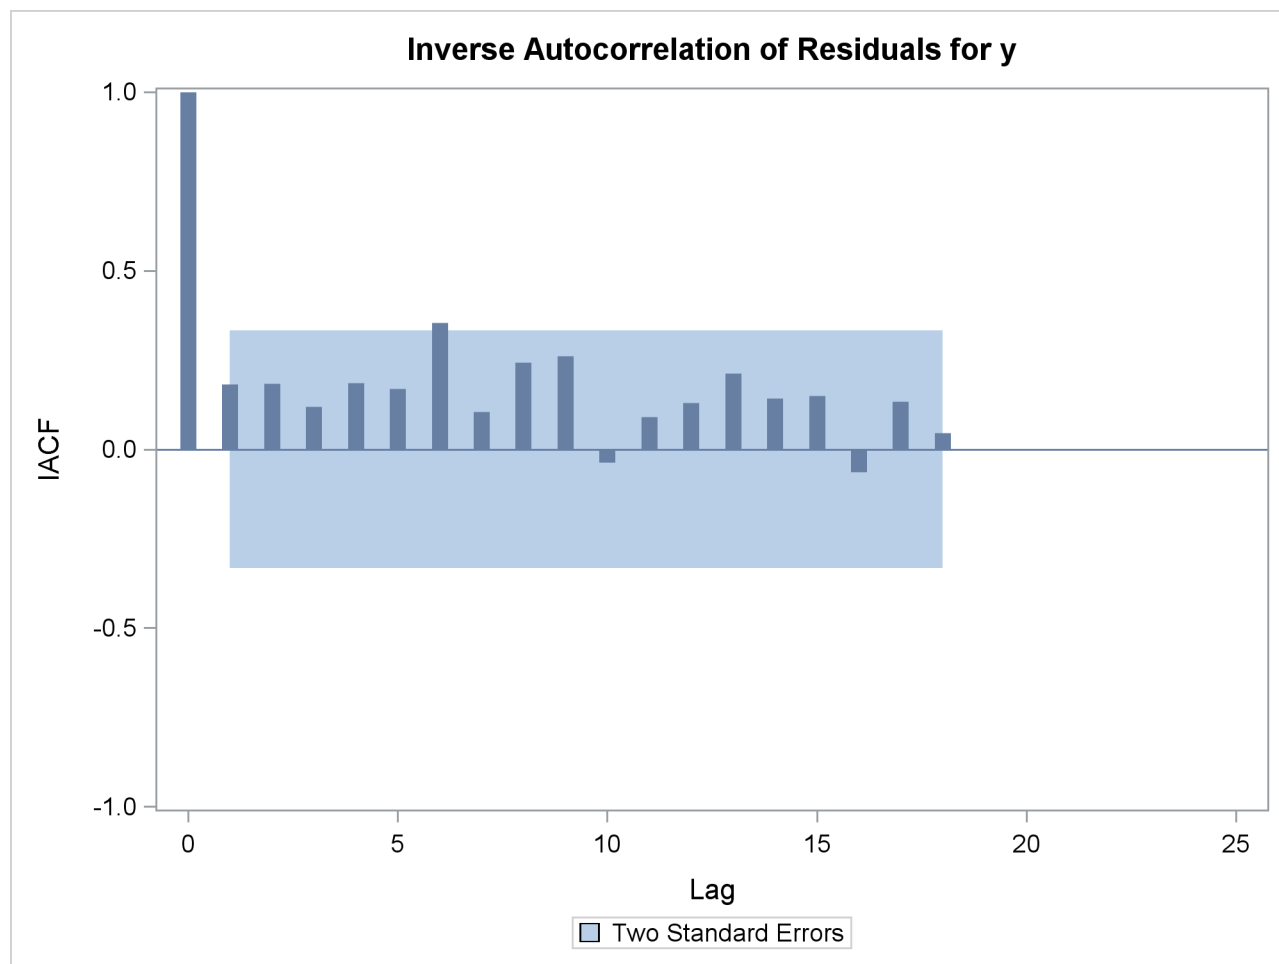
Output 8.8.2 Predicted versus Actual Plot



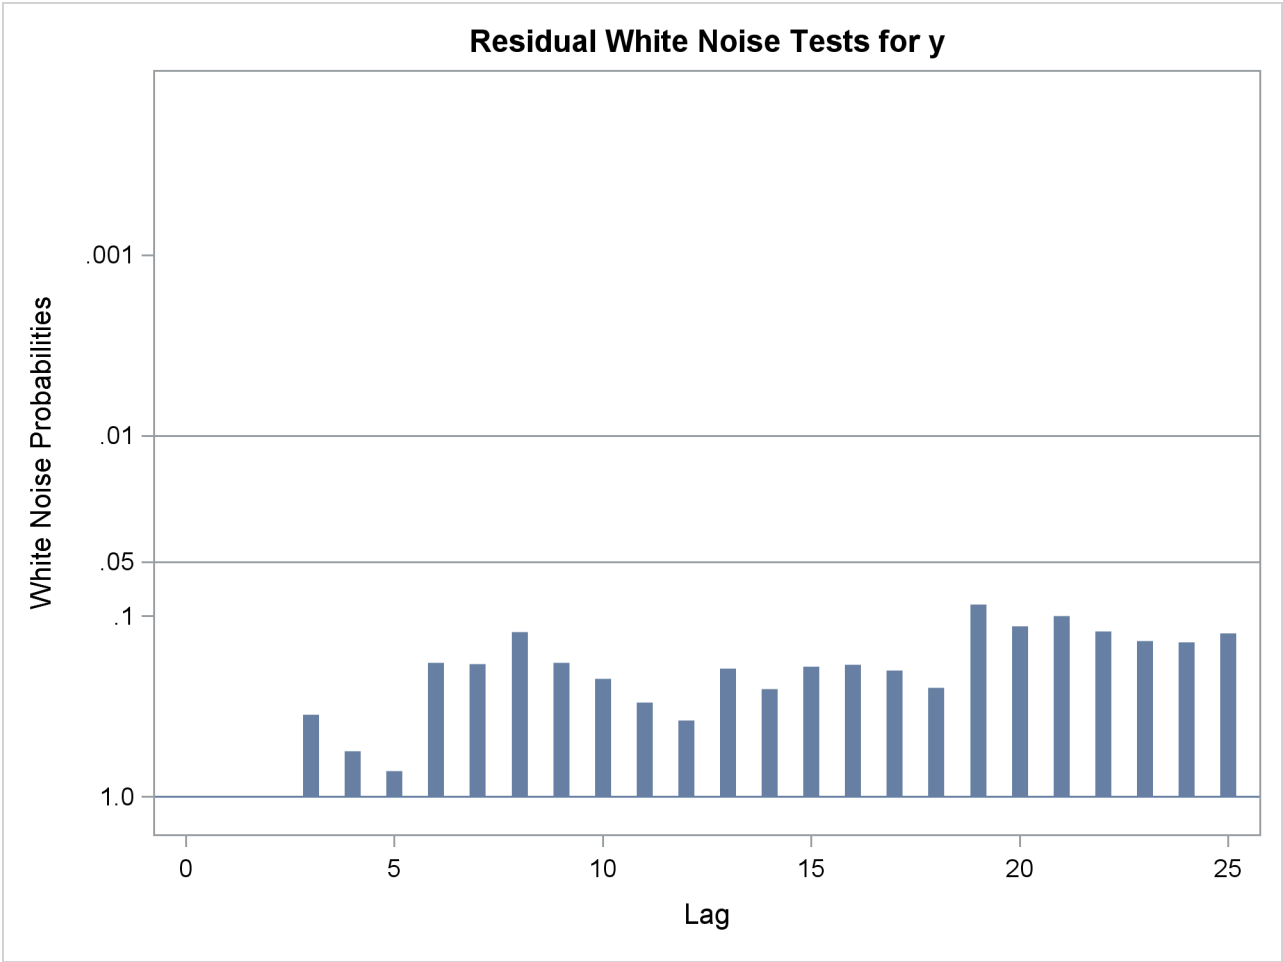
Output 8.8.3 Autocorrelation of Residuals Plot

Output 8.8.4 Partial Autocorrelation of Residuals Plot

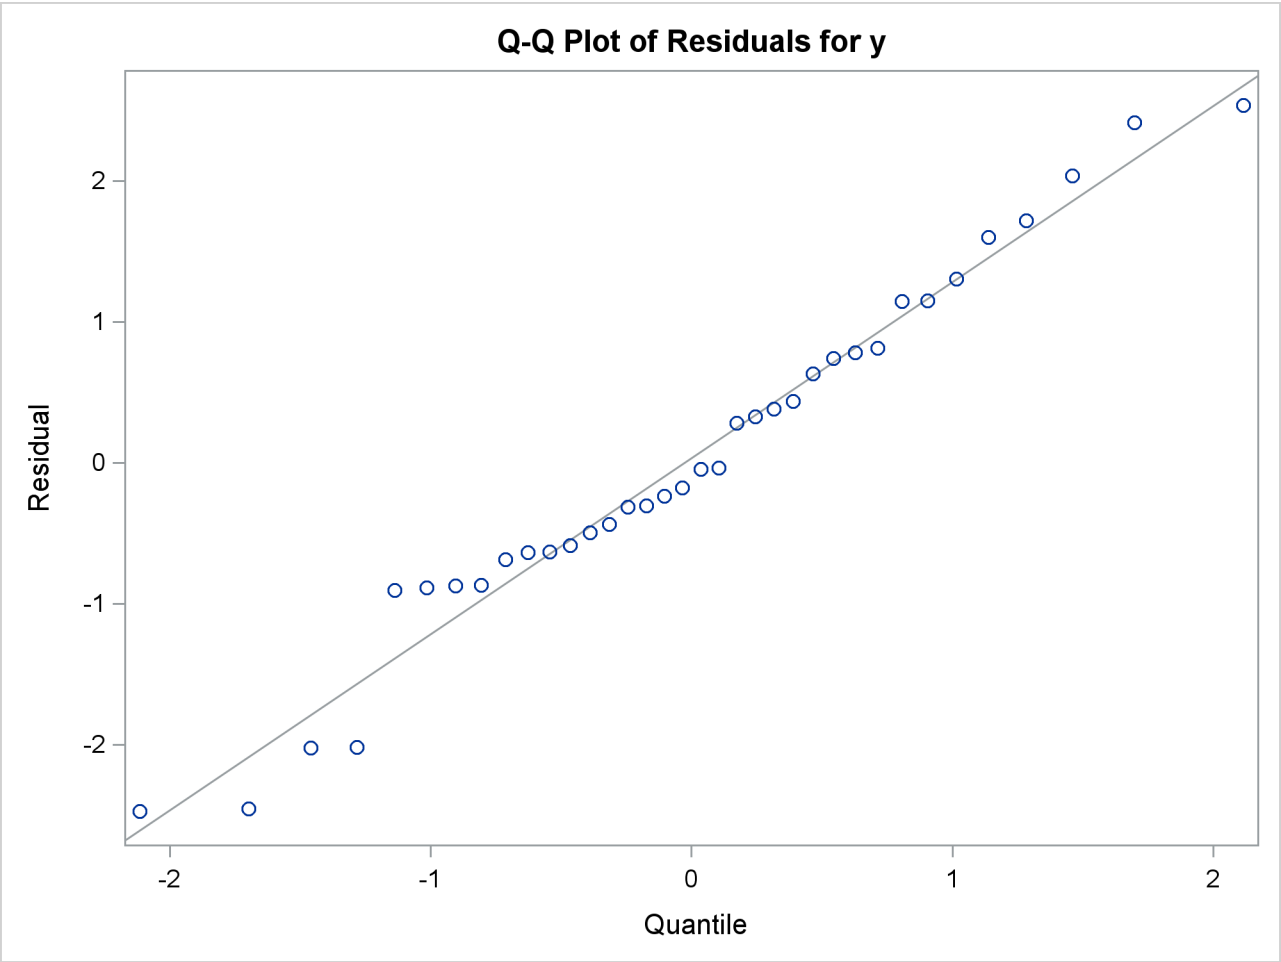


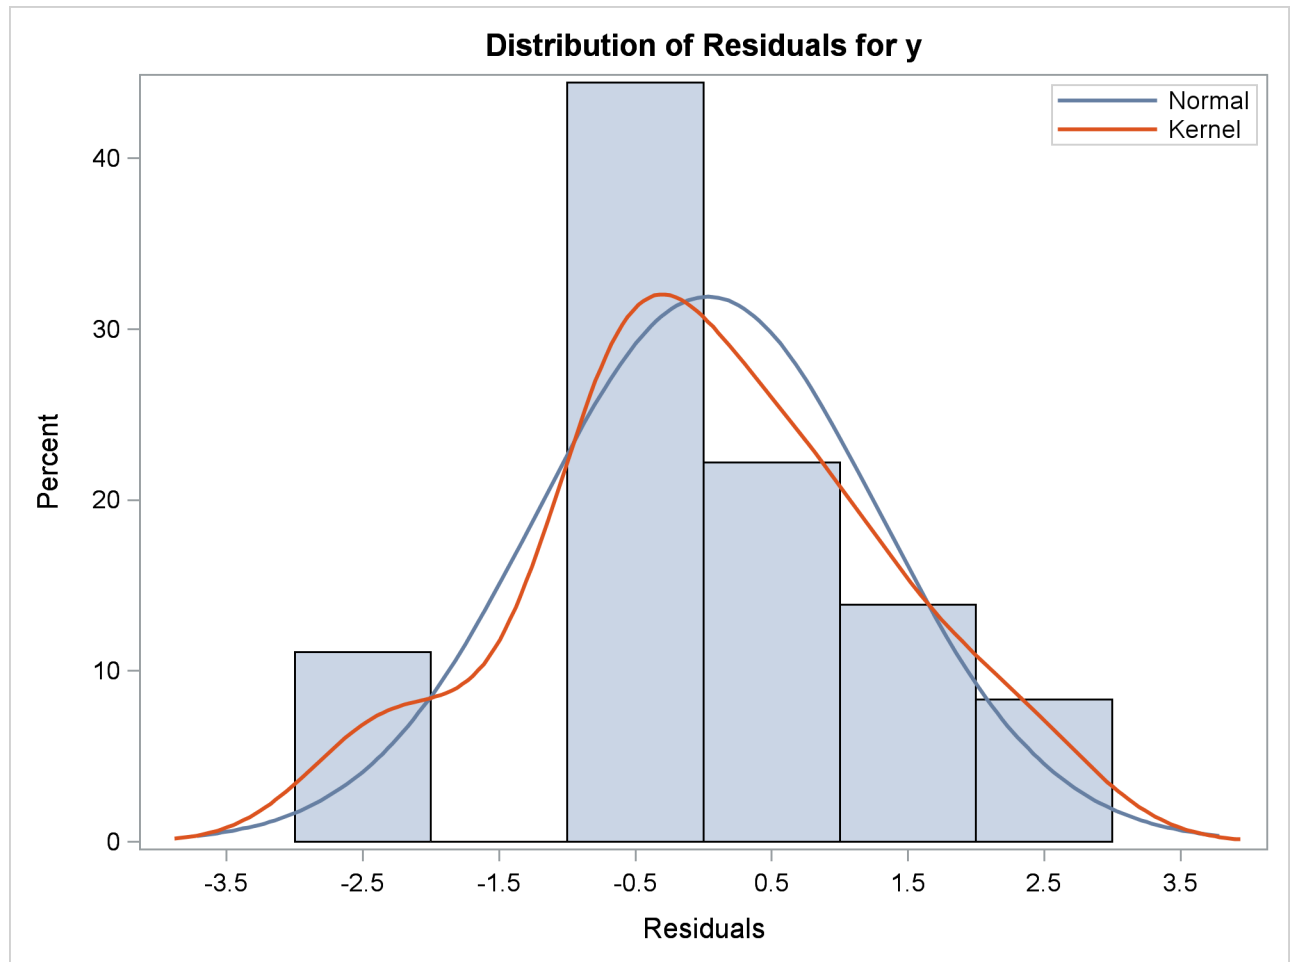
Output 8.8.5 Inverse Autocorrelation of Residuals Plot

Output 8.8.6 Tests for White Noise Residuals Plot



Output 8.8.7 Q-Q Plot of Residuals



Output 8.8.8 Histogram of Residuals

References

- Anderson, T. W. and Mentz, R. P. (1980), "On the Structure of the Likelihood Function of Autoregressive and Moving Average Models," *Journal of Time Series*, 1, 83–94.
- Ansley, C. F., Kohn, R., and Shively, T. S. (1992), "Computing p -Values for the Generalized Durbin-Watson and Other Invariant Test Statistics," *Journal of Econometrics*, 54, 277–300.
- Baillie, R. T. and Bollerslev, T. (1992), "Prediction in Dynamic Models with Time-Dependent Conditional Variances," *Journal of Econometrics*, 52, 91–113.
- Balke, N. S. and Gordon, R. J. (1986), "Historical Data," in R. J. Gordon, ed., *The American Business Cycle*, 781–850, Chicago: The University of Chicago Press.
- Bartels, R. (1982), "The Rank Version of von Neumann's Ratio Test for Randomness," *Journal of the American Statistical Association*, 77(377), 40–46.
- Beach, C. M. and MacKinnon, J. G. (1978), "A Maximum Likelihood Procedure for Regression with Auto-correlated Errors," *Econometrica*, 46, 51–58.
- Bhargava, A. (1986), "On the Theory of Testing for Unit Roots in Observed Time Series," *The Review of Economic Studies*, 53, 369–384.
- Bollerslev, T. (1986), "Generalized Autoregressive Conditional Heteroskedasticity," *Journal of Econometrics*, 31, 307–327.
- Bollerslev, T. (1987), "A Conditionally Heteroskedastic Time Series Model for Speculative Prices and Rates of Return," *The Review of Economics and Statistics*, 69, 542–547.
- Box, G. E. P. and Jenkins, G. M. (1976), *Time Series Analysis: Forecasting and Control*, Revised Edition, San Francisco: Holden-Day.
- Breitung, J. (1995), "Modified Stationarity Tests With Improved Power in Small Samples," *Statistical Papers*, 36, 77–95.
- Breusch, T. S. and Pagan, A. R. (1979), "A Simple Test for Heteroscedasticity and Random Coefficient Variation," *Econometrica*, 47, 1287–1294.
- Broock, W. A., Dechert, W. D., and Scheinkman, J. A. (1987), "A Test for Independence Based on the Correlation Dimension," Department of Economics, University of Wisconsin at Madison, University of Houston, and University of Chicago.
- Broock, W. A., Scheinkman, J. A., Dechert, W. D., and LeBaron, B. (1996), "A Test for Independence Based on the Correlation Dimension," *Econometric Reviews*, 15(3), 197–235.
- Campbell, J. Y. and Perron, P. (1991), "Pitfalls and Opportunities: What Macroeconomists Should Know About Unit Roots," *NBER Macroeconomics Annual*, 141–201.
- Caner, M. and Kilian, L. (2001), "Size Distortions Of Tests Of The Null Hypothesis Of Stationarity: Evidence And Implications For The PPP Debate," *Journal of International Money and Finance*, 20, 639–657.

- Chipman, J. S. (1979), "Efficiency of Least Squares Estimation of Linear Trend When Residuals Are Auto-correlated," *Econometrica*, 47, 115–128.
- Chow, G. (1960), "Tests of Equality between Sets of Coefficients in Two Linear Regressions," *Econometrica*, 28, 531–534.
- Cochrane, D. and Orcutt, G. H. (1949), "Application of Least Squares Regression to Relationships Containing Autocorrelated Error Terms," *Journal of the American Statistical Association*, 44, 32–61.
- Cribari-Neto, F. (2004), "Asymptotic Inference under Heteroskedasticity of Unknown Form," *Computational Statistics and Data Analysis*, 45, 215–233.
- Cromwell, J. B., Labys, W. C., and Terraza, M. (1994), *Univariate Tests for Time Series Models*, Thousand Oaks, CA: Sage.
- Davidson, R. and MacKinnon, J. G. (1993), *Estimation and Inference in Econometrics*, New York: Oxford University Press.
- Davies, R. B. (1973), "Numerical Inversion of a Characteristic Function," *Biometrika*, 60, 415–417.
- DeJong, D. N., Nankervis, J. C., Savin, N. E., and Whiteman, C. H. (1992), "The Power Problems of Unit Root Rest in Time Series with Autoregressive Errors," *Journal of Econometrics*, 53, 323–343.
- Dickey, D. A. and Fuller, W. A. (1979), "Distribution of the Estimators for Autoregressive Time Series with a Unit Root," *Journal of the American Statistical Association*, 74, 427–431.
- Ding, Z., Granger, C. W. J., and Engle, R. (1993), "A Long Memory Property of Stock Market Returns and a New Model," *Journal of Empirical Finance*, 1, 83–106.
- Duffie, D. (1989), *Futures Markets*, Englewood Cliffs, NJ: Prentice Hall.
- Durbin, J. (1969), "Tests for Serial Correlation in Regression Analysis Based on the Periodogram of Least-Squares Residuals," *Biometrika*, 56, 1–15.
- Durbin, J. (1970), "Testing for Serial Correlation in Least-Squares Regression When Some of the Regressors Are Lagged Dependent Variables," *Econometrica*, 38, 410–421.
- Edgerton, D. and Wells, C. (1994), "Critical Values for the CUSUMSQ Statistic in Medium and Large Sized Samples," *Oxford Bulletin of Economics and Statistics*, 56, 355–365.
- Elliott, G., Rothenberg, T. J., and Stock, J. H. (1996), "Efficient Tests for an Autoregressive Unit Root," *Econometrica*, 64, 813–836.
- Engle, R. F. (1982), "Autoregressive Conditional Heteroscedasticity with Estimates of the Variance of United Kingdom Inflation," *Econometrica*, 50, 987–1007.
- Engle, R. F. and Bollerslev, T. (1986), "Modelling the Persistence of Conditional Variances," *Econometric Review*, 5, 1–50.
- Engle, R. F. and Granger, C. W. J. (1987), "Co-Integration and Error Correction: Representation, Estimation, and Testing," *Econometrica*, 55, 251–276.
- Engle, R. F., Lilien, D. M., and Robins, R. P. (1987), "Estimating Time Varying Risk in the Term Structure: The ARCH-M Model," *Econometrica*, 55, 391–407.

- Engle, R. F. and Ng, V. K. (1993), "Measuring and Testing the Impact of News on Volatility," *Journal of Finance*, 48, 1749–1778.
- Engle, R. F. and Yoo, B. S. (1987), "Forecasting and Testing in Co-integrated Systems," *Journal of Econometrics*.
- Fuller, W. A. (1976), *Introduction to Statistical Time Series*, New York: John Wiley & Sons.
- Gallant, A. R. and Goebel, J. J. (1976), "Nonlinear Regression with Autoregressive Errors," *Journal of the American Statistical Association*, 71, 961–967.
- Glosten, L., Jaganathan, R., and Runkle, D. (1993), "Relationship between the Expected Value and Volatility of the Nominal Excess Returns on Stocks," *Journal of Finance*, 48, 1779–1802.
- Godfrey, L. G. (1978a), "Testing against General Autoregressive and Moving Average Error Models When the Regressors Include Lagged Dependent Variables," *Econometrica*, 46, 1293–1301.
- Godfrey, L. G. (1978b), "Testing for Higher Order Serial Correlation in Regression Equations When the Regressors Include Lagged Dependent Variables," *Econometrica*, 46, 1303–1310.
- Godfrey, L. G. (1988), *Misspecification Tests in Econometrics*, Cambridge: Cambridge University Press.
- Golub, G. H. and Van Loan, C. F. (1989), *Matrix Computations*, Second Edition, Baltimore: Johns Hopkins University Press.
- Greene, W. H. (1993), *Econometric Analysis*, Second Edition, New York: Macmillan.
- Hamilton, J. D. (1994), *Time Series Analysis*, Princeton, NJ: Princeton University Press.
- Hannan, E. J. and Quinn, B. G. (1979), "The Determination of the Order of an Autoregression," *Journal of the Royal Statistical Society, Series B*, 41, 190–195.
- Harvey, A. C. (1981), *The Econometric Analysis of Time Series*, New York: John Wiley & Sons.
- Harvey, A. C. (1990), *The Econometric Analysis of Time Series*, Second Edition, Cambridge: MIT Press.
- Harvey, A. C. and McAvinchey, I. D. (1978), "The Small Sample Efficiency of Two-Step Estimators in Regression Models with Autoregressive Disturbances," Discussion Paper No. 78-10, University of British Columbia.
- Harvey, A. C. and Phillips, G. D. A. (1979), "Maximum Likelihood Estimation of Regression Models with Autoregressive-Moving Average Disturbances," *Biometrika*, 66, 49–58.
- Hayashi, F. (2000), *Econometrics*, Princeton University Press.
- Hildreth, C. and Lu, J. Y. (1960), *Demand Relations with Autocorrelated Disturbances*, Technical Report 276, Michigan State University Agricultural Experiment Station, East Lansing, MI.
- Hobijn, B., Franses, P. H., and Ooms, M. (2004), "Generalization of the KPSS-Test for Stationarity," *Statistica Neerlandica*, 58, 483–502.
- Hurvich, C. M. and Tsai, C.-L. (1989), "Regression and Time Series Model Selection in Small Samples," *Biometrika*, 76, 297–307.

- Inder, B. A. (1984), "Finite-Sample Power of Tests for Autocorrelation in Models Containing Lagged Dependent Variables," *Economics Letters*, 14, 179–185.
- Inder, B. A. (1986), "An Approximation to the Null Distribution of the Durbin-Watson Statistic in Models Containing Lagged Dependent Variables," *Econometric Theory*, 2, 413–428.
- Jarque, C. M. and Bera, A. K. (1980), "Efficient Tests for Normality, Homoskedasticity and Serial Independence of Regression Residuals," *Economics Letters*, 6, 255–259.
- Johansen, S. (1988), "Statistical Analysis of Cointegration Vectors," *Journal of Economic Dynamics and Control*, 12, 231–254.
- Johansen, S. (1991), "Estimation and Hypothesis Testing of Cointegration Vectors in Gaussian Vector Autoregressive Models," *Econometrica*, 59, 1551–1580.
- Johnston, J. (1972), *Econometric Methods*, Second Edition, New York: McGraw-Hill.
- Jones, R. H. (1980), "Maximum Likelihood Fitting of ARMA Models to Time Series with Missing Observations," *Technometrics*, 22, 389–396.
- Judge, G. G., Griffiths, W. E., Hill, R. C., Lutkepohl, H., and Lee, T. C. (1985), *The Theory and Practice of Econometrics*, Second Edition, New York: John Wiley & Sons.
- Kanzler, L. (1999), "Very Fast and Correctly Sized Estimation of the BDS Statistic," Christ Church and Department of Economics, University of Oxford.
- King, M. L. and Wu, P. X. (1991), "Small-Disturbance Asymptotics and the Durbin-Watson and Related Tests in the Dynamic Regression Model," *Journal of Econometrics*, 47, 145–152.
- Kwiatkowski, D., Phillips, P. C. B., Schmidt, P., and Shin, Y. (1992), "Testing the Null Hypothesis of Stationarity against the Alternative of a Unit Root," *Journal of Econometrics*, 54, 159–178.
- Lee, J. H. and King, M. L. (1993), "A Locally Most Mean Powerful Based Score Test for ARCH and GARCH Regression Disturbances," *Journal of Business and Economic Statistics*, 11(1), 17–27.
- L'Esperance, W. L., Chall, D., , and Taylor, D. (1976), "An Algorithm for Determining the Distribution Function of the Durbin-Watson Test Statistic," *Econometrica*, 44, 1325–1326.
- MacKinnon, J. G. (1991), "Critical Values for Cointegration Tests," in *Long-Run Economic Relationships*, Oxford University Press.
- Maddala, G. S. (1977), *Econometrics*, New York: McGraw-Hill.
- Maeshiro, A. (1976), "Autoregressive Transformation, Trended Independent Variables and Autocorrelated Disturbance Terms," *Review of Economics and Statistics*, 58, 497–500.
- McLeod, A. I. and Li, W. K. (1983), "Diagnostic Checking ARMA Time Series Models Using Squared-Residual Autocorrelations," *Journal of Time Series Analysis*, 4, 269–273.
- Nelson, C. R. and Plosser, C. I. (1982), "Trends and Random Walks in Macroeconomic Time Series: Some Evidence and Implications," *Journal of Monetary Economics*, 10, 139–162.
- Nelson, D. B. (1990), "Stationarity and Persistence in the GARCH(1,1) Model," *Econometric Theory*, 6, 318–334.

- Nelson, D. B. (1991), "Conditional Heteroskedasticity in Asset Returns: A New Approach," *Econometrica*, 59, 347–370.
- Nelson, D. B. and Cao, C. Q. (1992), "Inequality Constraints in the Univariate GARCH Model," *Journal of Business & Economic Statistics*, 10, 229–235.
- Newey, W. K. and West, D. W. (1987), "A Simple, Positive Semi-definite, Heteroscedasticity and Autocorrelation Consistent Covariance Matrix," *Econometrica*, 55, 703–708.
- Ng, S. and Perron, P. (2001), "Lag Length Selection and the Construction of Unit Root Tests with Good Size and Power," *Econometrica*, 69, 1519–1554.
- Park, R. E. and Mitchell, B. M. (1980), "Estimating the Autocorrelated Error Model with Trended Data," *Journal of Econometrics*, 13, 185–201.
- Phillips, P. (1997), "Time Series Regression with a Unit Root," *Econometrica*, 55, 277–301.
- Phillips, P. C. and Ouliaris, S. (1990), "Asymptotic Properties of Residual Based Tests for Cointegration," *Econometrica*, 58, 165–193.
- Phillips, P. C. and Perron, P. (1988), "Testing for a Unit Root in Time Series Regression," *Biometrika*, 75, 335–346.
- Prais, S. J. and Winsten, C. B. (1954), "Trend Estimators and Serial Correlation," Cowles Commission Discussion Paper No. 383.
- Ramsey, J. B. (1969), "Tests for Specification Errors in Classical Linear Least Squares Regression Analysis," *Journal of Royal Statistical Society*.
- Said, S. E. and Dickey, D. A. (1984), "Testing for Unit Roots in ARMA Models of Unknown Order," *Biometrika*, 71, 599–607.
- Savin, N. E. and White, K. J. (1978), "Testing for Autocorrelation with Missing Observations," *Econometrica*, 46, 59–67.
- Schwarz, G. (1978), "Estimating the Dimension of a Model," *Annals of Statistics*, 6, 461–464.
- Schwert, G. (1989), "Tests for Unit Roots: A Monte Carlo Investigation," *Journal of Business and Economic Statistics*, 7, 147–159.
- Shively, T. S. (1990), "Fast Evaluation of the Distribution of the Durbin-Watson and Other Invariant Test Statistics in Time Series Regression," *Journal of the American Statistical Association*, 85, 676–685.
- Spitzer, J. J. (1979), "Small-Sample Properties of Nonlinear Least Squares and Maximum Likelihood Estimators in the Context of Autocorrelated Errors," *Journal of the American Statistical Association*, 74, 41–47.
- Stock, J. (1994), *Unit Roots, Structural Breaks and Trends*, chapter 46, 2739–2841, Elsevier.
- Stock, J. H. and Watson, M. W. (1988), "Testing for Common Trends," *Journal of the American Statistical Association*.
- Theil, H. (1971), *Principles of Econometrics*, New York: John Wiley & Sons.

- Vinod, H. D. (1973), "Generalization of the Durbin-Watson Statistic for Higher Order Autoregressive Process," *Communication in Statistics*, 2, 115–144.
- Wallis, K. F. (1972), "Testing for Fourth Order Autocorrelation in Quarterly Regression Equations," *Econometrica*, 40, 617–636.
- White, H. (1980), "A Heteroskedasticity-Consistent Covariance Matrix Estimator and a Direct Test for Heteroskedasticity," *Econometrica*, 48, 817–838.
- White, H. (1982), "Maximum Likelihood Estimation of Misspecified Models," *Econometrica*, 50, 1–25.
- White, K. J. (1992), "The Durbin-Watson Test for Autocorrelation in Nonlinear Models," *Review of Economics and Statistics*, 74, 370–373.
- Wong, H. and Li, W. K. (1995), "Portmanteau Test for Conditional Heteroscedasticity, Using Ranks of Squared Residuals," *Journal of Applied Statistics*, 22(1), 121–134.
- Zakoian, J. M. (1994), "Threshold Heteroscedastic Models," *Journal of Economic Dynamics and Control*, 18, 931–955.

Chapter 9

The COMPUTAB Procedure

Contents

Overview: COMPUTAB Procedure	460
Getting Started: COMPUTAB Procedure	460
Producing a Simple Report	461
Using PROC COMPUTAB	462
Defining Report Layout	463
Adding Computed Rows and Columns	464
Enhancing the Report	465
Syntax: COMPUTAB Procedure	466
Functional Summary	466
PROC COMPUTAB Statement	468
COLUMNS Statement	469
ROWS Statement	471
CELL Statement	473
INIT Statement	473
Programming Statements	474
BY Statement	475
SUMBY Statement	476
NOTRANS Option	477
Details: COMPUTAB Procedure	477
Program Flow Example	477
Order of Calculations	480
Column Selection	481
Controlling Execution within Row and Column Blocks	483
Program Flow	483
Direct Access to Table Cells	485
Reserved Words	486
Missing Values	486
OUT= Data Set	486
Examples: COMPUTAB Procedure	487
Example 9.1: Using Programming Statements	487
Example 9.2: Enhancing a Report	489
Example 9.3: Comparison of Actual and Budget	494
Example 9.4: Consolidations	497
Example 9.5: Creating an Output Data Set	502

Example 9.6: A What-If Market Analysis	504
Example 9.7: Cash Flows	508

Overview: COMPUTAB Procedure

The COMPUTAB (computing and tabular reporting) procedure produces tabular reports generated using a programmable data table.

The COMPUTAB procedure is especially useful when you need both the power of a programmable spreadsheet and a report generation system, but you want to set up a program to run in a batch mode and generate routine reports.

With PROC COMPUTAB, you can select a subset of observations from the input data set, define the format of a table, operate on its row and column values, and create new columns and rows. Access to individual table values is available when needed.

The COMPUTAB procedure can tailor reports to almost any desired specification and provide consolidation reports over summarization variables. The generated report values can be stored in an output data set. PROC COMPUTAB is especially useful in creating tabular reports such as income statements, balance sheets, and other row and column reports.

Getting Started: COMPUTAB Procedure

The following example shows the different types of reports that can be generated by PROC COMPUTAB.

Suppose a company has monthly expense data on three of its divisions and wants to produce the year-to-date expense report shown in [Figure 9.1](#). This section starts out with the default report produced by the COMPUTAB procedure and modifies it until the desired report is achieved.

Figure 9.1 Year-to-Date Expense Report

Year to Date Expenses				
	Division	Division	Division	All
	A	B	C	Divisions
Travel Expenses within U.S.	18700	211000	12800	\$242,500
Advertising	18500	176000	34500	\$229,000
Permanent Staff Salaries	186000	1270000	201000	\$1,657,000
Benefits Including Insurance	3900	11100	17500	\$32,500
	=====	=====	=====	=====
Total	227100	1668100	265800	\$2,161,000

Producing a Simple Report

Without any specifications, the COMPUTAB procedure transposes and prints the input data set. The variables in the input data set become rows in the report, and the observations in the input data set become columns. The variable names are used as the row titles. The column headings default to COL1 through COLn. For example, the following input data set contains the monthly expenses reported by different divisions of the company:

```
data report;
  length compdiv $ 1;
  input compdiv $ date:date7. salary travel insure advrtise;
  format date date7.;
  label travel    = 'Travel Expenses within U.S.'
        advrtise = 'Advertising'
        salary   = 'Permanent Staff Salaries'
        insure   = 'Benefits Including Insurance';
datalines;
A 31JAN1989 95000 10500 2000 6500
B 31JAN1989 668000 112000 5600 90000
C 31JAN1989 105000 6800 9000 18500
A 28FEB1989 91000 8200 1900 12000
B 28FEB1989 602000 99000 5500 86000
C 28FEB1989 96000 6000 8500 16000
;
```

You can get a listing of the data set by using the PRINT procedure, as follows:

```
title 'Listing of Monthly Divisional Expense Data';
proc print data=report;
run;
```

Figure 9.2 Listing of Data Set by PROC PRINT

Listing of Monthly Divisional Expense Data						
Obs	compdiv	date	salary	travel	insure	advrtise
1	A	31JAN89	95000	10500	2000	6500
2	B	31JAN89	668000	112000	5600	90000
3	C	31JAN89	105000	6800	9000	18500
4	A	28FEB89	91000	8200	1900	12000
5	B	28FEB89	602000	99000	5500	86000
6	C	28FEB89	96000	6000	8500	16000

To get a simple, transposed report of the same data set, use the following PROC COMPUTAB statement:

```
title 'Monthly Divisional Expense Report';
proc computab data=report;
run;
```

Figure 9.3 Listing of Data Set by PROC COMPUTAB

Monthly Divisional Expense Report						
	COL1	COL2	COL3	COL4	COL5	COL6
compdiv	A	B	C	A	B	C
date	31JAN89	31JAN89	31JAN89	28FEB89	28FEB89	28FEB89
salary	95000.00	668000.00	105000.00	91000.00	602000.00	96000.00
travel	10500.00	112000.00	6800.00	8200.00	99000.00	6000.00
insure	2000.00	5600.00	9000.00	1900.00	5500.00	8500.00
advrtise	6500.00	90000.00	18500.00	12000.00	86000.00	16000.00

Using PROC COMPUTAB

The COMPUTAB procedure is best understood by examining the following features:

- definition of the report layout with ROWS and COLUMNS statements
- input block
- row blocks
- column blocks

PROC COMPUTAB builds a table according to the specifications in the ROWS and COLUMNS statements. Row names and column names define the rows and columns of the table. Options in the ROWS and COLUMNS statements control titles, spacing, and formatting.

The input block places input observations into the appropriate columns of the report. It consists of programming statements used to select observations to be included in the report, to determine the column into which the observation should be placed, and to calculate row and column values that are not in the input data set.

Row blocks and column blocks perform operations on the values of rows and columns of the report after the input block has executed. Row blocks are a block of programming statements labeled ROWxxxxx: that create or modify row values; column blocks are a block of programming statements labeled COLxxxxx: that create or modify column values. Row and column blocks can make multiple passes through the report for final calculations.

For most reports, these features are sufficient. More complicated applications might require knowledge of the program data vector and the COMPUTAB data table. These topics are discussed in the section “[Details: COMPUTAB Procedure](#)” on page 477.

Defining Report Layout

ROWS and COLUMNS statements define the rows and columns of the report. The order of row and column names in these statements determines the order of rows and columns in the report. Additional ROWS and COLUMNS statements can be used to specify row and column formatting options.

The following statements select and order the variables from the input data set and produce the report in Figure 9.4:

```
proc computab data=report;
  rows travel advrtise salary;
run;
```

Figure 9.4 Report Produced Using a ROWS Statement

Monthly Divisional Expense Report						
	COL1	COL2	COL3	COL4	COL5	COL6
TRAVEL	10500.00	112000.00	6800.00	8200.00	99000.00	6000.00
ADVRTISE	6500.00	90000.00	18500.00	12000.00	86000.00	16000.00
SALARY	95000.00	668000.00	105000.00	91000.00	602000.00	96000.00

When a COLUMNS statement is not specified, each observation becomes a new column. If you use a COLUMNS statement, you must specify to which column each observation belongs by using program statements for column selection. When more than one observation is selected for the same column, values are summed.

The following statements produce Figure 9.5:

```
proc computab data= report;
  rows travel advrtise salary insure;
  columns a b c;
  *----select column for company division,
    based on value of compdiv----*;
  a = compdiv = 'A';
  b = compdiv = 'B';
  c = compdiv = 'C';
run;
```

The statement `A=COMPDIV='A'`; illustrates the use of logical operators as a selection technique. If `COMPDIV='A'`, then the current observation is added to the A column. See *SAS Language: Reference, Version 6, First Edition* for more information about logical operators.

Figure 9.5 Report Produced Using ROWS and COLUMNS Statements

Monthly Divisional Expense Report				
	A	B	C	
TRAVEL	18700.00	211000.00	12800.00	
ADVRTISE	18500.00	176000.00	34500.00	
SALARY	186000.00	1270000.0	201000.00	
INSURE	3900.00	11100.00	17500.00	

Adding Computed Rows and Columns

In addition to the variables and observations in the input data set, you can create additional rows or columns by using SAS programming statements in PROC COMPUTAB. You can do the following:

- modify input data and select columns in the input block
- create or modify columns in column blocks
- create or modify rows in row blocks

The following statements add one computed row (SUM) and one computed column (TOTAL) to the report in Figure 9.5. In the input block the logical operators indicate the observations that correspond to each column of the report. After the input block reads in the values from the input data set, the column block creates the column variable TOTAL by summing the columns A, B, and C. The additional row variable, SUM, is calculated as the sum of the other rows. The result is shown in Figure 9.6.

```
proc computab data= report;
  rows travel advrtise salary insure sum;
  columns a b c total;
  a = compdiv = 'A';
  b = compdiv = 'B';
  c = compdiv = 'C';
  colblk: total = a + b + c;
  rowblk: sum   = travel + advrtise + salary + insure;
run;
```

Figure 9.6 Report Produced Using Row and Column Blocks

Monthly Divisional Expense Report				
	A	B	C	TOTAL
TRAVEL	18700.00	211000.00	12800.00	242500.00
ADVRTISE	18500.00	176000.00	34500.00	229000.00
SALARY	186000.00	1270000.0	201000.00	1657000.0
INSURE	3900.00	11100.00	17500.00	32500.00
SUM	227100.00	1668100.0	265800.00	2161000.0

Enhancing the Report

To enhance the appearance of the final report, you can use the following:

- TITLE and LABEL statements
- column headings
- row titles
- row and column spacing control
- overlining and underlining
- formats

The following example enhances the report in the previous example. The enhanced report is shown in [Figure 9.7](#).

The TITLE statement assigns the report title. The column headings in [Figure 9.7](#) (Division A, Division B, and Division C) are assigned in the first COLUMNS statement by “Division” _name_ specification. The second COLUMNS statement assigns the column heading (“All” “Divisions”), sets the spacing (+4), and formats the values in the TOTAL column.

Similarly, the first ROWS statement uses previously assigned variable labels for row labels by specifying the _LABEL_ option. The DUL option in the second ROWS statement double-underlines the INSURE row. The third ROWS statement assigns the row label TOTAL to the SUM row.

```

title 'Year to Date Expenses';

proc computab cwidth=8 cdec=0;

    columns a b c / 'Division' _name_;
    columns total / 'All' 'Divisions' +4 f=dollar10.0;

    rows travel advrtise salary insure / _label_;
    rows insure / dul;
    rows sum / 'Total';

    a = compdiv = 'A';
    b = compdiv = 'B';
    c = compdiv = 'C';

    colblk: total = a + b + c;
    rowblk: sum   = travel + advrtise + salary + insure;
run;
```

Figure 9.7 Report Produced by PROC COMPUTAB Using Enhancements

Year to Date Expenses				
	Division	Division	Division	All
	A	B	C	Divisions
Travel Expenses within U.S.	18700	211000	12800	\$242,500
Advertising	18500	176000	34500	\$229,000
Permanent Staff Salaries	186000	1270000	201000	\$1,657,000
Benefits Including Insurance	3900	11100	17500	\$32,500
	=====	=====	=====	=====
Total	227100	1668100	265800	\$2,161,000

Syntax: COMPUTAB Procedure

The following statements are used with the COMPUTAB procedure:

```

PROC COMPUTAB options ;
  BY variables ;
  COLUMNS names / options ;
  ROWS names / options ;
  CELL names / FORMAT= format ;
  INIT anchor-name locator-name values locator-name values ;
  programming statements ;
  SUMBY variables ;

```

The PROC COMPUTAB statement is the only required statement. The COLUMNS, ROWS, and CELL statements define the COMPUTAB table. The INIT statement initializes the COMPUTAB table values. Programming statements process COMPUTAB table values. The BY and SUMBY statements provide BY-group processing and consolidation (roll up) tables.

Functional Summary

Table 9.1 summarizes the COMPUTAB procedure statements and options.

Table 9.1 COMPUTAB Functional Summary

Description	Statement	Option
Statements		
specify BY-group processing	BY	
specify the format for printing a particular cell	CELL	
define columns of the report	COLUMNS	
initialize values in the COMPUTAB data table	INIT	
define rows of the report	ROWS	

Description	Statement	Option
produce consolidation tables	SUMBY	
Data Set Options		
specify the input data set	COMPUTAB	DATA=
specify an output data set	COMPUTAB	OUT=
Input Options		
specify a value to use when testing for 0	COMPUTAB	FUZZ=
initialize the data table to missing	COMPUTAB	INITMISS
prevent the transposition of the input data set	COMPUTAB	NOTRANS
Printing Control Options		
suppress printing of the listed columns	COLUMNS	NOPRINT
suppress all printed output	COMPUTAB	NOPRINT
suppress printing of the listed rows	ROWS	NOPRINT
suppress columns with all 0 or missing values	COLUMNS	NOZERO
suppress rows with all 0 or missing values	ROWS	NOZERO
list option values	COMPUTAB	OPTIONS
overprint titles, values, overlining, and underlining associated with listed rows	ROWS	OVERPRINT
print only consolidation tables	COMPUTAB	SUMONLY
Report Formatting Options		
specify number of decimal places to print	COMPUTAB	CDEC=
specify number of spaces between columns	COMPUTAB	CSPACE=
specify column width for the report	COMPUTAB	CWIDTH=
overline the listed rows with double lines	ROWS	DOL
underline the listed rows with double lines	ROWS	DUL
specify a format for printing the cell values	CELL	FORMAT=
specify a format for printing column values	COLUMNS	FORMAT=
specify a format for printing the row values	ROWS	FORMAT=
left-align the column headings	COLUMNS	LJC
left-justify character rows in each column	ROWS	LJC
specify indentation from the margin	ROWS	+n
suppress printing of row titles on later pages	COMPUTAB	NORTR
overline the listed rows with a single line	ROWS	OL
start a new page before printing the listed rows	ROWS	_PAGE_
specify number of spaces before row titles	COMPUTAB	RTS=
print a blank row	ROWS	SKIP
underline the listed rows with a single line	ROWS	UL
specify text to print if column is 0 or missing	COLUMNS	ZERO=
specify text to print if row is 0 or missing	ROWS	ZERO=
Row and Column Type Options		
specify that columns contain character data	COLUMNS	CHAR
specify that rows contain character data	ROWS	CHAR

Description	Statement	Option
Options for Column Headings		
specify literal column headings	COLUMNS	'column heading'
use variable labels in column headings	COLUMNS	_LABEL_
specify a master title centered over columns	COLUMNS	MTITLE=
use column names in column headings	COLUMNS	_NAME_
Options for Row Titling		
use labels in row titles	ROWS	_LABEL_
use row names in row titles	ROWS	_NAME_
specify literal row titles	ROWS	'row title'

PROC COMPUTAB Statement

PROC COMPUTAB *options* ;

The following options can be used in the PROC COMPUTAB statement.

Input Options

DATA=SAS-data-set

names the SAS data set that contains the input data. If this option is not specified, the last created data set is used. If you are not reading a data set, use DATA=_NULL_.

FUZZ=value

specifies the criterion to use when testing for 0. If a number is within the FUZZ= value of 0, the number is set to 0.

INITMISS

initializes the COMPUTAB data table to missing rather than to 0. The COMPUTAB data table is discussed further in the section “[Details: COMPUTAB Procedure](#)” on page 477.

NOTRANSPOSE

NOTRANS

prevents the transposition of the input data set in building the COMPUTAB report tables. The NOTRANS option causes input data set variables to appear among the columns of the report rather than among the rows.

Report Formatting Options

The formatting options specify default values. Many of the formatting options can be modified for specific columns in COLUMNS statements and for rows in ROWS statements.

CDEC=*d*

specifies the default number of decimal places for printing. The default is CDEC=2. See the FORMAT= option in the sections on COLUMN, ROWS, and CELL statements later in this chapter.

CSPACE=*n*

specifies the default number of spaces to insert between columns. The value of the CSPACE= option is used as the default value for the +*n* option in the COLUMNS statement. The default is CSPACE=2.

CWIDTH=*w*

specifies a default column width for the report. The default is CWIDTH=9. The width must be in the range of 1–32.

NORTR

suppresses the printing of row titles on each page. The NORTR (no row-title repeat) option is useful to suppress row titles when report pages are to be joined together in a larger report.

RTS=*n*

specifies the default number of spaces to be inserted before row titles when row titles appear after the first printed column. The default row-title spacing is RTS=2.

Output Options

NOPRINT

suppresses all printed output. Use the NOPRINT option with the OUT= option to produce an output data set but no printed reports.

OPTIONS

lists PROC COMPUTAB option values. The option values appear on a separate page preceding the procedure's normal output.

OUT=*SAS-data-set*

names the SAS data set to contain the output data. See the section “[Details: COMPUTAB Procedure](#)” on page 477 for a description of the structure of the output data set.

SUMONLY

suppresses printing of detailed reports. When the SUMONLY option is used, PROC COMPUTAB generates and prints only consolidation tables as specified in the SUMBY statement.

COLUMNS Statement

COLUMNS *column-list* / *options* ;

COLUMNS statements define the columns of the report. The COLUMNS statement can be abbreviated COLUMN, COLS, or COL.

The specified column names must be valid SAS names. Abbreviated lists, as described in *SAS Language: Reference*, can also be used.

You can use as many COLUMNS statements as you need. A COLUMNS statement can describe more than one column, and one column of the report can be described with several different COLUMNS statements. The order of the columns on the report is determined by the order of appearance of column names in COLUMNS statements. The first occurrence of the name determines where in the sequence of columns a particular column is located.

The following options can be used in the COLUMNS statement.

Option for Column Type

CHAR

indicates that the columns contain character data.

Options for Column Headings

You can specify as many lines of column headings as needed. If no options are specified, the column names from the COLUMNS statement are used as column headings. Any or all of the following options can be used in a column heading:

“column heading”

specifies that the characters enclosed in quotes are to be used in the column heading for the variable or variables listed in the COLUMNS statement. Each quoted string appears on a separate line of the heading.

LABEL

uses labels, if provided, in the heading for the column or columns listed in the COLUMNS statement. If a label has not been provided, the name of the column is used. See *SAS Language: Reference* for information about the LABEL statement.

MTITLE=*“text”*

specifies that the string of characters enclosed in quotes is a master title to be centered over all the columns listed in the COLUMNS statement. The list of columns must be consecutive. Special characters (“+”, “*”, “=”, and so forth) placed on either side of the text expand to fill the space. The MTITLE= option can be abbreviated M=.

NAME

uses column names in column headings for the columns listed in the COLUMNS statement. This option allows headings (*“text”*) and names to be combined in a heading.

Options for Column Print Control

+n

inserts *n* spaces before each column listed in the COLUMNS statement. The default spacing is given by the CSPACE= option in the PROC COMPUTAB statement.

NOPRINT

suppresses printing of columns listed in the COLUMNS statement. This option enables you to create columns to be used for intermediate calculations without having those columns printed.

NOZERO

suppresses printing of columns when all the values in a column are 0 or missing. Numbers within the FUZZ= value of 0 are treated as 0.

PAGE

starts a new page of the report before printing each of the columns in the list that follows.

TITLES

prints row titles before each column in the list. The _TITLES_ option can be abbreviated as _TITLE_.

Options for Column Formatting

Column formats override row formats for particular table cells only when the input data set is not transposed (when the NOTRANS option is specified).

FORMAT=*format*

specifies a format for printing the values of the columns listed in the COLUMNS statement. The FORMAT= option can be abbreviated F=.

LJC

left-justifies the column headings for the columns listed. By default, columns are right-justified. When the LJC (left-justify character) option is used, any character row values in the column are also left-justified rather than right-justified.

ZERO=*"text"*

substitutes *"text"* when the value in the column is 0 or missing.

ROWS Statement

ROWS *row-list / options ;*

ROWS statements define the rows of the report. The ROWS statement can be abbreviated ROW.

The specified row names must be valid SAS names. Abbreviated lists, as described in *SAS Language: Reference*, can also be used.

You can use as many ROWS statements as you need. A ROWS statement can describe more than one row, and one row of the report can be described with several different ROWS statements. The order of the rows in the report is determined by the order of appearance of row names in ROWS statements. The first occurrence of the name determines where the row is located.

The following options can be used in the ROWS statement.

Option for Row Type

CHAR

indicates that the rows contain character data.

Options for Row Titling

You can specify as many lines of row titles as needed. If no options are specified, the names from the ROWS statement are used as row titles. Any or all of the following options can be used in a row title:

LABEL

uses labels as row titles for the row or rows listed in the ROWS statement. If a label is not provided, the name of the row is substituted. See *SAS Language: Reference* for more information about the LABEL statement.

NAME

uses row names in row titles for the row or rows listed in the ROWS statement.

“row title”

specifies that the string of characters enclosed in quotes is to be used in the row title for the row or rows listed in the ROWS statement. Each quoted string appears on a separate line of the heading.

Options for Row Print Control

+n

indents *n* spaces from the margin for the rows in the ROWS statement.

DOL

overlines the rows listed in the ROWS statement with double lines. Overlines are printed on the line before any row titles or data for the row.

DUL

underlines the rows listed in the ROWS statement with double lines. Underlines are printed on the line after the data for the row. A row can have both an underline and an overline option.

NOPRINT

suppresses printing of the rows listed in the ROWS statement. This option enables you to create rows to be used for intermediate calculations without having those rows printed.

NOZERO

suppresses the printing of a row when all the values are 0 or missing.

OL

overlines the rows listed in the ROWS statement with a single line. Overlines are printed on the line before any row titles or data for the row.

OVERPRINT

overprints titles, values, overlining, and underlining associated with rows listed in the ROWS statement. The OVERPRINT option can be abbreviated OVP. This option is valid only when the system option OVP is in effect. See *SAS Language: Reference* for more information about the OVP option.

PAGE

starts a new page of the report before printing these rows.

SKIP

prints a blank line after the data lines for these rows.

UL

underlines the rows listed in the ROWS statement with a single line. Underlines are printed on the line after the data for the row. A row can have both an underline and an overline option.

Options for Row Formatting

Row formatting options take precedence over column-formatting options when the input data set is transposed. Row print width can never be wider than column width. Character values are truncated on the right.

FORMAT= *format*

specifies a format for printing the values of the rows listed in the ROWS statement. The FORMAT= option can be abbreviated as F=.

LJC

left-justifies character rows in each column.

ZERO= *"text"*

substitutes *text* when the value in the row is 0 or missing.

CELL Statement

CELL *cell_names* / **FORMAT=** *format* ;

The CELL statement specifies the format for printing a particular cell in the COMPUTAB data table. Cell variable names are compound SAS names of the form *name1.name2*, where *name1* is the name of a row variable and *name2* is the name of a column variable. Formats specified with the FORMAT= option in CELL statements override formats specified in ROWS and COLUMNS statements.

INIT Statement

INIT *anchor-name* [*locator-name*] *values* [*locator-name values*] ;

The INIT statement initializes values in the COMPUTAB data table at the beginning of each execution of the procedure and at the beginning of each BY group if a BY statement is present.

The INIT statement in the COMPUTAB procedure is similar in function to the RETAIN statement in the DATA step, which initializes values in the program data vector. The INIT statement can be used at any point after the variable to which it refers has been defined in COLUMNS or ROWS statements. Each INIT statement initializes one row or column. Any number of INIT statements can be used.

The first term after the keyword INIT, *anchor-name*, anchors initialization to a row or column. If *anchor-name* is a row name, then all *locator-name* values in the statement are columns of that row. If *anchor-name* is a column name, then all *locator-name* values in the statement are rows of that column.

The following terms appear in the INIT statement:

<i>anchor-name</i>	names the row or column in which values are to be initialized. This term is required.
<i>locator-name</i>	identifies the starting column in the row (or starting row in the column) into which values are to be placed. For example, in a table with a row SALES and a column for each month of the year, the following statement initializes values for columns JAN, FEB, and JUN:

```
init sales jan 500 feb 600 jun 800;
```

If you do not specify *locator-name* values, the first value is placed into the first row or column, the second value into the second row or column, and so on. For example, the following statement assigns 500 to column JAN, 600 to FEB, and 450 to MAR:

```
init sales 500 600 450;
```

+n	specifies the number of columns in a row (or rows in a column) that are to be skipped when initializing values. For example, the following statement assigns 500 to JAN and 900 to JUL:
----	---

```
init sales jan 500 +5 900;
```

n*value	assigns <i>value</i> to <i>n</i> columns in the row (or rows in the column). For example, both of the following statements assign 500 to columns JAN through JUN and 1000 to JUL through DEC:
---------	---

```
init sales jan 6*500 jul 6*1000;
```

```
init sales 6*500 6*1000;
```

Programming Statements

You can use most SAS programming statements the same way you use them in the DATA step. Also, all DATA step functions can be used in the COMPUTAB procedure.

Lines written by the PUT statement are not integrated with the COMPUTAB report. PUT statement output is written to the SAS log.

The automatic variable `_N_` can be used; its value is the number of observations read or the number read in the current BY group, if a BY statement is used. `FIRST.variable` and `LAST.variable` references cannot be used.

The following statements are also available in PROC COMPUTAB:

ABORT	FORMAT
ARRAY	GOTO
ATTRIB	IF-THEN/ELSE
assignment statement	LABEL
CALL	LINK
DELETE	PUT
DO	RETAIN
iterative DO	SELECT
DO UNTIL	STOP
DO WHILE	sum statement
END	TITLE
FOOTNOTE	

The programming statements can be assigned labels `ROWxxxxx:` or `COLxxxxx:` to indicate the start of a row and column block, respectively. Statements in a row block create or change values in all the columns in the specified rows. Similarly, statements in a column block create or change values in all the rows in the specified columns.

There is an implied RETURN statement before each new row or column block. Thus, the flow of execution does not leave the current row (column) block before the block repeats for all columns (rows.) Row and column variables and nonretained variables are initialized prior to each execution of the block.

The next `COLxxxxx:` label, `ROWxxxxx:` label, or the end of the PROC COMPUTAB step signals the end of a row (column) block. Column blocks and row blocks can be mixed in any order. In some cases, performing calculations in different orders can lead to different results.

See the sections “[Program Flow Example](#)” on page 477, “[Order of Calculations](#)” on page 480, and “[Controlling Execution within Row and Column Blocks](#)” on page 483 for more information.

BY Statement

BY *variables* ;

A BY statement can be used with PROC COMPUTAB to obtain separate reports for observations in groups defined by the BY variables. At the beginning of each BY group, before PROC COMPUTAB reads any observations, all table values are set to 0 unless the INITMISS option or an INIT statement is specified.

SUMBY Statement

SUMBY *variables* ;

The SUMBY statement produces consolidation tables for variables whose names are in the SUMBY list. Only one SUMBY statement can be used.

To use a SUMBY statement, you must use a BY statement. The SUMBY and BY variables must be in the same relative order in both statements. For example:

```
by a b c;
sumby a b;
```

This SUMBY statement produces tables that consolidate over values of C within levels of B and over values of B within levels of A. Suppose A has values 1, 2; B has values 1, 2; and C has values 1, 2, 3. Table 9.2 indicates the consolidation tables produced by the SUMBY statement.

Table 9.2 Consolidation Tables Produced by the SUMBY Statement

SUMBY Consolidations	Consolidated BY Groups		
A=1, B=1	C=1	C=2	C=3
A=1, B=2	C=1	C=2	C=3
A=1	B=1, C=1	B=1, C=2	B=1, C=3
	B=2, C=1	B=2, C=2	B=2, C=3
A=2, B=1	C=1	C=2	C=3
A=2, B=2	C=1	C=2	C=3
A=2	B=1, C=1	B=1, C=2	B=1, C=3
	B=2, C=1	B=2, C=2	B=2, C=3

Two consolidation tables for B are produced for each value of A. The first table consolidates the three tables produced for the values of C while B is 1; the second table consolidates the three tables produced for C while B is 2.

Tables are similarly produced for values of A. Nested consolidation tables are produced for B (as described previously) for each value of A. Thus, this SUMBY statement produces a total of six consolidation tables in addition to the tables produced for each BY group.

To produce a table that consolidates the entire data set (the equivalent of using PROC COMPUTAB with neither BY nor SUMBY statements), use the special name `_TOTAL_` as the first entry in the SUMBY variable list. For example,

```
sumby _total_ a b;
```

PROC COMPUTAB then produces consolidation tables for SUMBY variables as well as a consolidation table for all observations.

To produce only consolidation tables, use the SUMONLY option in the PROC COMPUTAB statement.

NOTRANS Option

The NOTRANS option in the PROC COMPUTAB statement prevents the transposition of the input data set. NOTRANS affects the input block, the precedence of row and column options, and the structure of the output data set if the OUT= option is specified.

When the input data set is transposed, input variables are among the rows of the COMPUTAB report, and observations compose columns. The reverse is true if the data set is not transposed; therefore, the input block must select rows to receive data values, and input variables are among the columns.

Variables from the input data set dominate the format specification and data type. When the input data set is transposed, input variables are among the rows of the report, and row options take precedence over column options. When the input data set is not transposed, input variables are among the columns, and column options take precedence over row options.

Variables for the output data set are taken from the dimension (row or column) that contains variables from the input data set. When the input data set is transposed, this dimension is the row dimension; otherwise, the output variables come from the column dimension.

Details: COMPUTAB Procedure

Program Flow Example

This example shows how the COMPUTAB procedure processes observations in the program working storage and the COMPUTAB data table (CDT).

Assume you have three years of figures for sales and cost of goods sold (CGS), and you want to determine total sales and cost of goods sold and calculate gross profit and the profit margin.

```
data example;
    input year sales cgs;
datalines;
1988    83      52
1989   106      85
1990   120     114
;

proc computab data=example;

    columns c88 c89 c90 total;
    rows sales cgs gprofit pctmarg;

    /* calculate gross profit */
    gprofit = sales - cgs;
```

```

/* select a column */
c88 = year = 1988;
c89 = year = 1989;
c90 = year = 1990;

/* calculate row totals for sales */
/* and cost of goods sold */
col: total = c88 + c89 + c90;

/* calculate profit margin */
row: pctmarg = gprofit / cgs * 100;
run;

```

Table 9.3 shows the CDT before any observation is read in. All the columns and rows are defined with the values initialized to 0.

Table 9.3 CDT before Any Input

	C88	C89	C90	TOTAL
SALES	0	0	0	0
CGS	0	0	0	0
GPROFIT	0	0	0	0
PCTMARG	0	0	0	0

When the first input is read in (year=1988, sales=83, and cgs=52), the input block puts the values for SALES and CGS in the C88 column since year=1988. Also the value for the gross profit for that year (GPROFIT) is calculated as indicated in the following statements:

```

gprofit = sales-cgs;
c88 = year = 1988;
c89 = year = 1989;
c90 = year = 1990;

```

Table 9.4 shows the CDT after the first observation is input.

Table 9.4 CDT after First Observation Input (C88=1)

	C88	C89	C90	TOTAL
SALES	83	0	0	0
CGS	52	0	0	0
GPROFIT	31	0	0	0
PCTMARG	0	0	0	0

Similarly, the second observation (year=1989, sales=106, cgs=85) is put in the second column, and the GPROFIT is calculated to be 21. The third observation (year=1990, sales=120, cgs=114) is put in the third column, and the GPROFIT is calculated to be 6. Table 9.5 shows the CDT after all observations are input.

Table 9.5 CDT after All Observations Input

	C88	C89	C90	TOTAL
SALES	83	106	120	0
CGS	52	85	114	0
GPROFIT	31	21	6	0
PCTMARG	0	0	0	0

After the input block is executed for each observation in the input data set, the first row or column block is processed. In this case, the column block is

```
col: total = c88 + c89 + c90;
```

The column block executes for each row, calculating the TOTAL column for each row. Table 9.6 shows the CDT after the column block has executed for the first row (total=83 + 106 + 120). The total sales for the three years is 309.

Table 9.6 CDT after Column Block Executed for First Row

	C88	C89	C90	TOTAL
SALES	83	106	120	309
CGS	52	85	114	0
GPROFIT	31	21	6	0
PCTMARG	0	0	0	0

Table 9.7 shows the CDT after the column block has executed for all rows and the values for total cost of goods sold and total gross profit have been calculated.

Table 9.7 CDT after Column Block Executed for All Rows

	C88	C89	C90	TOTAL
SALES	83	106	120	309
CGS	52	85	114	251
GPROFIT	31	21	6	58
PCTMARG	0	0	0	0

After the column block has been executed for all rows, the next block is processed. The row block is

```
row: pctmarg = gprofit / cgs * 100;
```

The row block executes for each column, calculating the PCTMARG for each year and the total (TOTAL column) for three years. Table 9.8 shows the CDT after the row block has executed for all columns.

Table 9.8 CDT after Row Block Executed for All Columns

	C88	C89	C90	TOTAL
SALES	83	106	120	309
CGS	52	85	114	251
GPROFIT	31	21	6	58
PCTMARG	59.62	24.71	5.26	23.11

Order of Calculations

The COMPUTAB procedure provides alternative programming methods for performing most calculations. New column and row values are formed by adding values from the input data set, directly or with modification, into existing columns or rows. New columns can be formed in the input block or in column blocks. New rows can be formed in the input block or in row blocks.

This example illustrates the different ways to collect totals. Table 9.9 is the total sales report for two products, SALES1 and SALES2, during the years 1988–1990. The values for SALES1 and SALES2 in columns C88, C89, and C90 come from the input data set.

Table 9.9 Total Sales Report

	C88	C89	C90	SALESTOT
SALES1	15	45	80	140
SALES2	30	40	50	120
YRTOT	45	85	130	260

The new column SALESTOT, which is the total sales for each product over three years, can be computed in several different ways:

- in the input block by selecting SALESTOT for each observation:

```
salestot = 1;
```

- in a column block:

```
coltot: salestot = c88 + c89 + c90;
```

In a similar fashion, the new row YRTOT, which is the total sales for each year, can be formed as follows:

- in the input block:

```
yrtot = sales1 + sales2;
```

- in a row block:

```
rowtot: yrtot = sales1 + sales2;
```

Performing some calculations in PROC COMPUTAB in different orders can yield different results, because many operations are not commutative. Be sure to perform calculations in the proper sequence. It might take several column and row blocks to produce the desired report values.

Notice that in the previous example, the grand total for all rows and columns is 260 and is the same whether it is calculated from row subtotals or column subtotals. It makes no difference in this case whether you compute the row block or the column block first.

However, consider the following example where a new column and a new row are formed:

Table 9.10 Report Sensitive to Order of Calculations

	STORE1	STORE2	STORE3	MAX
PRODUCT1	12	13	27	27
PRODUCT2	11	15	14	15
TOTAL	23	28	41	?

The new column MAX contains the maximum value in each row, and the new row TOTAL contains the column totals. MAX is calculated in a column block:

```
col: max = max(store1, store2, store3);
```

TOTAL is calculated in a row block:

```
row: total = product1 + product2;
```

Notice that either of two values, 41 or 42, is possible for the element in column MAX and row TOTAL. If the row block is first, the value is the maximum of the column totals (41). If the column block is first, the value is the sum of the MAX values (42). Whether to compute a column block before a row block can be a critical decision.

Column Selection

The following discussion assumes that the NOTRANS option has not been specified. When NOTRANS is specified, this section applies to rows rather than columns.

If a COLUMNS statement appears in PROC COMPUTAB, a target column must be selected for the incoming observation. If there is no COLUMNS statement, a new column is added for each observation. When

a COLUMNS statement is present and the selection criteria fail to designate a column, the current observation is ignored. Faulty column selection can result in columns or entire tables of 0s (or missing values if the INITMISS option is specified).

During execution of the input block, when an observation is read, its values are copied into row variables in the program data vector (PDV).

To select columns, use either the column variable names themselves or the special variable `_COL_`. Use the column names by setting a column variable equal to some nonzero value. The example in the section “[Getting Started: COMPUTAB Procedure](#)” on page 460 uses the logical expression `COMPDIV= value`, and the result is assigned to the corresponding column variable.

```
a = compdiv = 'A';
b = compdiv = 'B';
c = compdiv = 'C';
```

IF statements can also be used to select columns. The following statements are equivalent to the preceding example:

```
if      compdiv = 'A' then a = 1;
else if compdiv = 'B' then b = 1;
else if compdiv = 'C' then c = 1;
```

At the end of the input block for each observation, PROC COMPUTAB multiplies numeric input values by any nonzero selector values and adds the result to selected columns. Character values simply overwrite the contents already in the table. If more than one column is selected, the values are added to each of the selected columns.

Use the `_COL_` variable to select a column by assigning the column number to it. The COMPUTAB procedure automatically initializes column variables and sets the `_COL_` variable to 0 at the start of each execution of the input block. At the end of the input block for each observation, PROC COMPUTAB examines the value of `_COL_`. If the value is nonzero and within range, the row variable values are added to the CDT cells of the `_COL_`th column, for example,

```
data rept;
    input div sales cgs;
datalines;
2   106   85
3   120  114
1    83   52
;

proc computab data=rept;
    row div sales cgs;
    columns div1 div2 div3;
    _col_ = div;
run;
```

The code in this example places the first observation (DIV=2) in column 2 (DIV2), the second observation (DIV=3) in column 3 (DIV3), and the third observation (DIV=1) in column 1 (DIV1).

Controlling Execution within Row and Column Blocks

Row names, column names, and the special variables `_ROW_` and `_COL_` can be used to limit the execution of programming statements to selected rows or columns. A row block operates on all columns of the table for a specified row unless restricted in some way. Likewise, a column block operates on all rows for a specified column. Use column names or `_COL_` in a row block to execute programming statements conditionally; use row names or `_ROW_` in a column block.

For example, consider a simple column block that consists of only one statement:

```
col: total = qtr1 + qtr2 + qtr3 + qtr4;
```

This column block assigns a value to each row in the TOTAL column. As each row participates in the execution of a column block, the following changes occur:

- Its row variable in the program data vector is set to 1.
- The value of `_ROW_` is the number of the participating row.
- The value from each column of the row is copied from the COMPUTAB data table to the program data vector.

To avoid calculating TOTAL on particular rows, use row names or `_ROW_`. For example,

```
col: if sales|cost then total = qtr1 + qtr2 + qtr3 + qtr4;
```

or

```
col: if _row_ < 3 then total = qtr1 + qtr2 + qtr3 + qtr4;
```

Row and column blocks can appear in any order, and rows and columns can be selected in each block.

Program Flow

This section describes in detail the different steps in PROC COMPUTAB execution.

Step 1: Define Report Organization and Set Up the COMPUTAB Data Table

Before the COMPUTAB procedure reads in data or executes programming statements, the columns list from the COLUMNS statements and the rows list from the ROWS statements are used to set up a matrix of all columns and rows in the report. This matrix is called the COMPUTAB data table (CDT). When you define

columns and rows of the CDT, the COMPUTAB procedure also sets up corresponding variables in working storage called the program data vector (PDV) for programming statements. Data values reside in the CDT but are copied into the program data vector as they are needed for calculations.

Step 2: Select Input Data with Input Block Programming Statements

The input block copies input observations into rows or columns of the CDT. By default, observations go to columns; if the data set is not transposed (the NOTRANS option is specified), observations go to rows of the report table. The input block consists of all executable statements before any ROWxxxxx: or COLxxxxx: statement label. Use programming statements to perform calculations and select a given observation to be added into the report.

Input Block

The input block is executed once for each observation in the input data set. If there is no input data set, the input block is not executed. The program logic of the input block is as follows:

1. Determine which variables, row or column, are selector variables and which are data variables. Selector variables determine which rows or columns receive values at the end of the block. Data variables contain the values that the selected rows or columns receive. By default, column variables are selector variables and row variables are data variables. If the input data set is not transposed (the NOTRANS option is specified), the roles are reversed.
2. Initialize nonretained program variables (including selector variables) to 0 (or missing if the INITMISS option is specified). Selector variables are temporarily associated with a numeric data item supplied by the procedure. Using these variables to control row and column selection does not affect any other data values.
3. Transfer data from an observation in the data set to data variables in the PDV.
4. Execute the programming statements in the input block by using values from the PDV and storing results in the PDV.
5. Transfer data values from the PDV into the appropriate columns of the CDT. If a selector variable for a row or column has a nonmissing and nonzero value, multiply each PDV value for variables used in the report by the selector variable and add the results to the selected row or column of the CDT.

Step 3: Calculate Final Values by Using Column Blocks and Row Blocks

Column Blocks

A column block is executed once for each row of the CDT. The program logic of a column block is as follows:

1. Indicate the current row by setting the corresponding row variable in the PDV to 1 and the other row variables to missing. Assign the current row number to the special variable `_ROW_`.

2. Move values from the current row of the CDT to the respective column variables in the PDV.
3. Execute programming statements in the column block by using the column values in the PDV. Here new columns can be calculated and old ones adjusted.
4. Move the values back from the PDV to the current row of the CDT.

Row Blocks

A row block is executed once for each column of the CDT. The program logic of a row block is as follows:

1. Indicate the current column by setting the corresponding column variable in the PDV to 1 and the other column variables to missing. Assign the current column number to the special variable `_COL_`.
2. Move values from the current column of the CDT to the respective row variables in the PDV.
3. Execute programming statements in the row block by using the row values in the PDV. Here new rows can be calculated and old ones adjusted.
4. Move the values back from the PDV to the current column of the CDT.

See the section “[Controlling Execution within Row and Column Blocks](#)” on page 483.

Any number of column blocks and row blocks can be used. Each can include any number of programming statements.

The values of row variables and column variables are determined by the order in which different row-block and column-block programming statements are processed. These values can be modified throughout the COMPUTAB procedure, and final values are printed in the report.

Direct Access to Table Cells

You can insert or retrieve numeric values from specific table cells by using the special reserved name `TABLE` with row and column subscripts. References to the `TABLE` have the form

```
TABLE[ row-index, column-index ]
```

where *row-index* and *column-index* can be numbers, character literals, numeric variables, character variables, or expressions that produce a number or a name. If an index is numeric, it must be within range; if it is character, it must name a row or column.

References to `TABLE` elements can appear on either side of an equal sign in an assignment statement and can be used in a SAS expression.

Reserved Words

Certain words are reserved for special use by the COMPUTAB procedure, and using these words as variable names can lead to syntax errors or warnings. They are:

- COLUMN
- COLUMNS
- COL
- COLS
- _COL_
- ROW
- ROWS
- _ROW_
- INIT
- _N_
- TABLE

Missing Values

Missing values for variables in programming statements are treated in the same way that missing values are treated in the DATA step; that is, missing values used in expressions propagate missing values to the result. See *SAS Language: Reference* for more information about missing values.

Missing values in the input data are treated as follows in the COMPUTAB report table. At the end of the input block, either one or more rows or one or more columns can have been selected to receive values from the program data vector (PDV). Numeric data values from variables in the PDV are added into selected report table rows or columns. If a PDV value is missing, the values already in the selected rows or columns for that variable are unchanged by the current observation. Other values from the current observation are added to table values as usual.

OUT= Data Set

The output data set contains the following variables:

- BY variables

- a numeric variable `_TYPE_`
- a character variable `_NAME_`
- the column variables from the COMPUTAB data table

The BY variables contain values for the current BY group. For observations in the output data set from consolidation tables, the consolidated BY variables have missing values.

The special variable `_TYPE_` is a numeric variable that can have one of three values: 1, 2, or 3. `_TYPE_ = 1` indicates observations from the normal report table produced for each BY group; `_TYPE_ = 2` indicates observations from the `_TOTAL_` consolidation table; `_TYPE_ = 3` indicates observations from other consolidation tables. `_TYPE_ = 2` and `_TYPE_ = 3` observations have one or more BY variables with missing values.

The special variable `_NAME_` is a character variable of length 8 that contains the row or column name associated with the observation from the report table. If the input data set is transposed, `_NAME_` contains column names; otherwise, `_NAME_` contains row names.

If the input data set is transposed, the remaining variables in the output data set are row variables from the report table. They are column variables if the input data set is not transposed.

Examples: COMPUTAB Procedure

Example 9.1: Using Programming Statements

This example illustrates two ways of operating on the same input variables and producing the same tabular report. To simplify the example, no report enhancements are shown.

The manager of a hotel chain wants a report that shows the number of bookings at its hotels in each of four cities, the total number of bookings in the current quarter, and the percentage of the total coming from each location for each quarter of the year. Input observations contain the following variables: `REPTDATE` (report date), `LA` (number of bookings in Los Angeles), `ATL` (number of bookings in Atlanta), `CH` (number of bookings in Chicago), and `NY` (number of bookings in New York).

The following DATA step creates the SAS data set `BOOKINGS`:

```
data bookings;
  input reptdate date9. la atl ch ny;
datalines;
01JAN1989 100 110 120 130
01FEB1989 140 150 160 170
01MAR1989 180 190 200 210
01APR1989 220 230 240 250
01MAY1989 260 270 280 290
01JUN1989 300 310 320 330
```

```

01JUL1989 340 350 360 370
01AUG1989 380 390 400 410
01SEP1989 420 430 440 450
01OCT1989 460 470 480 490
01NOV1989 500 510 520 530
01DEC1989 540 550 560 570

```

```
;
```

The following PROC COMPUTAB statements select columns by setting `_COL_` to an appropriate value. The PCT1, PCT2, PCT3, and PCT4 columns represent the percentage contributed by each city to the total for the quarter. These statements produce [Output 9.1.1](#).

```

proc computab data=bookings cspace=1 cwidth=6;

  columns qtr1 pct1 qtr2 pct2 qtr3 pct3 qtr4 pct4;
  columns qtr1-qtr4 / format=6.;
  columns pct1-pct4 / format=6.2;
  rows la atl ch ny total;

  /* column selection */
  _col_ = qtr( reptdate ) * 2 - 1;

  /* copy qtr column values temporarily into pct columns */
  colcopy:
    pct1 = qtr1;
    pct2 = qtr2;
    pct3 = qtr3;
    pct4 = qtr4;

  /* calculate total row for all columns */
  /* calculate percentages for all rows in pct columns only */
  rowcalc:
    total = la + atl + ch + ny;
    if mod( _col_, 2 ) = 0 then do;
      la = la / total * 100;
      atl = atl / total * 100;
      ch = ch / total * 100;
      ny = ny / total * 100;
      total = 100;
    end;

run;

```

Output 9.1.1 Quarterly Report of Hotel Bookings

Year to Date Expenses									
	QTR1	PCT1	QTR2	PCT2	QTR3	PCT3	QTR4	PCT4	
LA	420	22.58	780	23.64	1140	24.05	1500	24.27	
ATL	450	24.19	810	24.55	1170	24.68	1530	24.76	
CH	480	25.81	840	25.45	1200	25.32	1560	25.24	
NY	510	27.42	870	26.36	1230	25.95	1590	25.73	
TOTAL	1860	100.00	3300	100.00	4740	100.00	6180	100.00	

Using the same input data, the next set of statements shows the usefulness of arrays in allowing PROC COMPUTAB to work in two directions at once. Arrays in larger programs can both reduce the amount of program source code and simplify otherwise complex methods of referring to rows and columns. The same report as in [Output 9.1.1](#) is produced.

```
proc computab data=bookings cspace=1 cwidth=6;

    columns qtr1 pct1 qtr2 pct2 qtr3 pct3 qtr4 pct4;
    columns qtr1-qtr4 / format=6.;
    columns pct1-pct4 / format=6.2;
    rows la atl ch ny total;

    array pct[4] pct1-pct4;
    array qt[4] qtr1-qtr4;
    array rowlist[5] la atl ch ny total;

    /* column selection */
    _col_ = qtr(reptdate) * 2 - 1;

    /* copy qtr column values temporarily into pct columns */
    colcopy:
        do i = 1 to 4;
            pct[i] = qt[i];
        end;

    /* calculate total row for all columns */
    /* calculate percentages for all rows in pct columns only */

    rowcalc:
        total = la + atl + ch + ny;
        if mod(_col_,2) = 0 then
            do i = 1 to 5;
                rowlist[i] = rowlist[i] / total * 100;
            end;
run;
```

Example 9.2: Enhancing a Report

The following example shows how a report can be enhanced from a simple listing to a complex report. The simplest COMPUTAB report is a transposed listing of the data in the SAS data set INCOMREP shown in [Output 9.2.1](#). To produce this output, nothing is specified except the PROC COMPUTAB statement and a TITLE statement.

```
data incomrep;
    length type $ 8;
    input type :$8. date :monyy7.
           sales retdis tcas selling randd
           general admin deprec other taxes;
    format date monyy7.;
datalines;
```

```

BUDGET JAN1989 4600 300 2200 480 110 500 210 14 -8 510
BUDGET FEB1989 4700 330 2300 500 110 500 200 14 0 480
BUDGET MAR1989 4800 360 2600 500 120 600 250 15 2 520
ACTUAL JAN1989 4900 505 2100 430 130 410 200 14 -8 500
ACTUAL FEB1989 5100 480 2400 510 110 390 230 15 2 490
;

```

```

title 'Computab Report without Any Specifications';
proc computab data=incomrep;
run;

```

Output 9.2.1 Simple Report

Computab Report without Any Specifications					
	COL1	COL2	COL3	COL4	COL5
type	BUDGET	BUDGET	BUDGET	ACTUAL	ACTUAL
date	JAN1989	FEB1989	MAR1989	JAN1989	FEB1989
sales	4600.00	4700.00	4800.00	4900.00	5100.00
retdis	300.00	330.00	360.00	505.00	480.00
tcos	2200.00	2300.00	2600.00	2100.00	2400.00
selling	480.00	500.00	500.00	430.00	510.00
randd	110.00	110.00	120.00	130.00	110.00
general	500.00	500.00	600.00	410.00	390.00
admin	210.00	200.00	250.00	200.00	230.00
deprec	14.00	14.00	15.00	14.00	15.00
other	-8.00	0.00	2.00	-8.00	2.00
taxes	510.00	480.00	520.00	500.00	490.00

To exclude the budgeted values from your report, select columns for ACTUAL observations only. To remove unwanted variables, specify the variables you want in a ROWS statement.

```

title 'Column Selection by Month';

proc computab data=incomrep;
  rows sales--other;
  columns jana feba mara;
  mnth = month(date);
  if type = 'ACTUAL';
    jana = mnth = 1;
    feba = mnth = 2;
    mara = mnth = 3;
run;

```

The report is shown in [Output 9.2.2](#).

Output 9.2.2 Report That Uses Column Selection Techniques

Column Selection by Month				
	JANA	FEB	MAR	
sales	4900.00	5100.00	0.00	
retdis	505.00	480.00	0.00	
tcos	2100.00	2400.00	0.00	
selling	430.00	510.00	0.00	
randd	130.00	110.00	0.00	
general	410.00	390.00	0.00	
admin	200.00	230.00	0.00	
deprec	14.00	15.00	0.00	
other	-8.00	2.00	0.00	

To complete the report, compute new rows from existing rows. This is done in a row block (although it can also be done in the input block). Add a new column (QTR1) that accumulates all the actual data. The NOZERO option suppresses the zero column for March. The output produced by these statements is shown in [Output 9.2.3](#).

```
proc computab data=incomrep;

    /* add a new column to be selected */
    /* qtr1 column will be selected several times */
    columns actual1-actual3 qtr1 / nozero;
    array collist[3] actual1-actual3;
    rows sales retdis netsales tcos grosspft selling randd general
          admin deprec operexp operinc other taxblinc taxes netincom;

    if type='ACTUAL';
    i = month(date);
    if i <= 3 then qtr1 = 1;
    collist[i]=1;

    rowcalc:
        if sales = . then return;
        netsales = sales - retdis;
        grosspft = netsales - tcos;
        operexp  = selling + randd + general + admin + deprec;
        operinc  = grosspft - operexp;
        taxblinc = operinc + other;
        netincom = taxblinc - taxes;

run;
```

Output 9.2.3 Report That Uses Techniques to Compute New Rows

Column Selection by Month				
	ACTUAL1	ACTUAL2	QTR1	
SALES	4900.00	5100.00	10000.00	
RETDIS	505.00	480.00	985.00	
NETSALES	4395.00	4620.00	9015.00	
TCOS	2100.00	2400.00	4500.00	
GROSSPFT	2295.00	2220.00	4515.00	
SELLING	430.00	510.00	940.00	
RANDD	130.00	110.00	240.00	
GENERAL	410.00	390.00	800.00	
ADMIN	200.00	230.00	430.00	
DEPREC	14.00	15.00	29.00	
OPEREXP	1184.00	1255.00	2439.00	
OPERINC	1111.00	965.00	2076.00	
OTHER	-8.00	2.00	-6.00	
TAXBLINC	1103.00	967.00	2070.00	
TAXES	500.00	490.00	990.00	
NETINCOM	603.00	477.00	1080.00	

Now that you have all the numbers calculated, add specifications to improve the report's appearance. Specify titles, row and column labels, and formats. The report produced by these statements is shown in [Output 9.2.4](#).

```

/* now get the report to look the way you want it */
title  'Pro Forma Income Statement';
title2 'XYZ Computer Services, Inc.';
title3 'Period to Date Actual';
title4 'Amounts in Thousands';

proc computab data=incomrep;

  columns actual1-actual3 qtr1 /
           nozero f=comma7. +3 ' ';
  array collist[3] actual1-actual3;
  columns actual1 / 'Jan';
  columns actual2 / 'Feb';
  columns actual3 / 'Mar';
  columns qtr1 / 'Total' 'Qtr 1';
  rows sales      / ' '
                   'Gross Sales ';
  rows retdis     / 'Less Returns & Discounts';
  rows netsales   / 'Net Sales'           +3 ol;
  rows tcos       / ' '
                   'Total Cost of Sales';
  rows grosspft   / ' '
                   'Gross Profit';
  rows selling    / ' '
                   'Operating Expenses:'
                   '   Selling';
  rows randd      / '   R & D';

```

```

rows general / +3;
rows admin   / '   Administrative';
rows deprec  / '   Depreciation'      ul;
rows operexp / ' '                      skip;
rows operinc / 'Operating Income';
rows other   / 'Other Income/-Expense' ul;
rows taxblinc / 'Taxable Income';
rows taxes   / 'Income Taxes'          ul;
rows netincom / '   Net Income'        dul;

if type = 'ACTUAL';
i = month( date );
collist[i] = 1;

colcalc:
    qtr1 = actual1 + actual2 + actual3;

rowcalc:
    if sales = . then return;
    netsales = sales - retdis;
    grosspft = netsales - tcost;
    operexp = selling + randd + general + admin + deprec;
    operinc = grosspft - operexp;
    taxblinc = operinc + other;
    netincom = taxblinc - taxes;
run;
```

Output 9.2.4 Specifying Titles, Row and Column Labels, and Formats

Pro Forma Income Statement XYZ Computer Services, Inc. Period to Date Actual Amounts in Thousands			
	Jan	Feb	Total Qtr 1
Gross Sales	4,900	5,100	10,000
Less Returns & Discounts	505	480	985
Net Sales	4,395	4,620	9,015
Total Cost of Sales	2,100	2,400	4,500
Gross Profit	2,295	2,220	4,515
Operating Expenses:			
Selling	430	510	940
R & D	130	110	240
GENERAL	410	390	800
Administrative	200	230	430
Depreciation	14	15	29
	1,184	1,255	2,439
Operating Income	1,111	965	2,076
Other Income/-Expense	-8	2	-6
Taxable Income	1,103	967	2,070
Income Taxes	500	490	990
Net Income	603	477	1,080

Example 9.3: Comparison of Actual and Budget

This example shows a more complex report that compares the actual data with the budgeted values. The same input data as in the previous example is used.

The report produced by these statements is shown in [Output 9.3.1](#). The report shows the values for the current month and the year-to-date totals for budgeted amounts, actual amounts, and the actuals as a percentage of the budgeted amounts. The data have the values for January and February. Therefore, the CURMO variable (current month) in the RETAIN statement is set to 2. The values for the observations where the month of the year is 2 (February) are accumulated for the current month values. The year-to-date values are accumulated from those observations where the month of the year is less than or equal to 2 (January and February).


```

data incomrep;
    length type $ 8;
    input type :$8. date :monyy7.
           sales retdis tcos selling randd
           general admin deprec other taxes;
    format date monyy7.;
datalines;
BUDGET JAN1989 4600 300 2200 480 110 500 210 14 -8 510
BUDGET FEB1989 4700 330 2300 500 110 500 200 14 0 480
BUDGET MAR1989 4800 360 2600 500 120 600 250 15 2 520
ACTUAL JAN1989 4900 505 2100 430 130 410 200 14 -8 500
ACTUAL FEB1989 5100 480 2400 510 110 390 230 15 2 490
;

title  'Pro Forma Income Statement';
title2 'XYZ Computer Services, Inc.';
title3 'Budget Analysis';
title4 'Amounts in Thousands';

options linesize=96;
proc computab data=incomrep;

    columns cmbud cmaact cmpct ytdbud ytdact ytdpct /
           zero=' ';
    columns cmbud--cmpct / mtitle='- Current Month: February -';
    columns ytdbud--ytdpct / mtitle='- Year To Date -';
    columns cmbud ytdbud / 'Budget' f=comma6.;
    columns cmaact ytdact / 'Actual' f=comma6.;
    columns cmpct ytdpct / '%' f=7.2;
    columns cmbud--ytdpct / '-';
    columns ytdbud / _titles_;
    retain curmo 2; /* current month: February */
    rows sales / ' '
                'Gross Sales';
    rows retdis / 'Less Returns & Discounts';
    rows netsales / 'Net Sales' +3 ol;
    rows tcos / ' '
                'Total Cost of Sales';
    rows grosspft / ' '
                'Gross Profit' +3;
    rows selling / ' '
                'Operating Expenses:'
                'Selling';
    rows randd / 'R & D';
    rows general / +3;
    rows admin / 'Administrative';
    rows deprec / 'Depreciation' ul;
    rows operexp / ' ';
    rows operinc / 'Operating Income' ol;
    rows other / 'Other Income/-Expense' ul;
    rows taxblinc / 'Taxable Income';
    rows taxes / 'Income Taxes' ul;
    rows netincom / 'Net Income' dul;

```

```

cmbud = type = 'BUDGET' & month(date) = curmo;
cmact = type = 'ACTUAL' & month(date) = curmo;
ytdbud = type = 'BUDGET' & month(date) <= curmo;
ytdact = type = 'ACTUAL' & month(date) <= curmo;

rowcalc:
  if cmpct | ytdpct then return;
  netsales = sales - retdis;
  grosspft = netsales - tcos;
  operexp  = selling + randd + general + admin + deprec;
  operinc  = grosspft - operexp;
  taxblinc = operinc + other;
  netincom = taxblinc - taxes;

colpct:
  if cmbud & cmact then cmpct = 100 * cmact / cmbud;
  if ytdbud & ytdact then ytdpct = 100 * ytdact / ytdbud;

run;

```

Output 9.3.1 Report That Uses Specifications to Tailor Output

Pro Forma Income Statement XYZ Computer Services, Inc. Budget Analysis Amounts in Thousands						
--- Current Month: February ---				----- Year To Date -----		
Budget	Actual	%		Budget	Actual	%
-----	-----	-----		-----	-----	-----
4,700	5,100	108.51	Gross Sales	9,300	10,000	107.53
330	480	145.45	Less Returns & Discounts	630	985	156.35
-----	-----	-----		-----	-----	-----
4,370	4,620	105.72	Net Sales	8,670	9,015	103.98
2,300	2,400	104.35	Total Cost of Sales	4,500	4,500	100.00
2,070	2,220	107.25	Gross Profit	4,170	4,515	108.27
Operating Expenses:						
500	510	102.00	Selling	980	940	95.92
110	110	100.00	R & D	220	240	109.09
500	390	78.00	GENERAL	1,000	800	80.00
200	230	115.00	Administrative	410	430	104.88
14	15	107.14	Depreciation	28	29	103.57
-----	-----	-----		-----	-----	-----
1,324	1,255	94.79		2,638	2,439	92.46
-----	-----	-----		-----	-----	-----
746	965	129.36	Operating Income	1,532	2,076	135.51
	2		Other Income/-Expense	-8	-6	75.00
-----	-----	-----		-----	-----	-----
746	967	129.62	Taxable Income	1,524	2,070	135.83
480	490	102.08	Income Taxes	990	990	100.00
-----	-----	-----		-----	-----	-----
266	477	179.32	Net Income	534	1,080	202.25
=====	=====	=====		=====	=====	=====

Example 9.4: Consolidations

This example consolidates product tables by region and region tables by corporate division. [Output 9.4.1](#) shows the North Central and Northeast regional summaries for the Equipment division for the first quarter. [Output 9.4.2](#) shows the profit summary for the Equipment division. Similar tables for the Publishing division are produced but not shown here.

```
data product;
    input pcode div region month sold revenue recd cost;
datalines;
1 1 1 1 56 5600 29 2465
1 1 1 2 13 1300 30 2550
1 1 1 3 17 1700 65 5525
2 1 1 1 2 240 50 4900
2 1 1 2 82 9840 17 1666

    ... more lines ...

proc format;
    value divfmt 1='Equipment'
                2='Publishing';
    value regfmt 1='North Central'
                2='Northeast'
                3='South'
                4='West';
run;

proc sort data=product;
    by div region pcode;
run;

title1 '      XYZ Development Corporation      ';
title2 ' Corporate Headquarters: New York, NY ';
title3 '      Profit Summary                    ';
title4 '                                         ';

options linesize=96;
proc computab data=product sumonly;
    by div region pcode;
    sumby _total_ div region;

    format div    divfmt.;
    format region regfmt.;
    label  div = 'DIVISION';

    /* specify order of columns and column titles */
    columns jan feb mar qtr1 /
            mtitle='- first quarter -' ' ' ' nozero;
    columns apr may jun qtr2 /
            mtitle='- second quarter -' ' ' ' nozero;
```

```

columns jul aug sep qtr3 /
               mtitle='- third quarter -' ' ' nozero;
columns oct nov dec qtr4 /
               mtitle='- fourth quarter -' ' ' nozero;
column  jan  / ' ' 'January' '=';
column  feb  / ' ' 'February' '=';
column  mar  / ' ' 'March' '=';
column  qtr1 / 'Quarter' 'Summary' '=';

column  apr  / ' ' 'April' '=' _page_;
column  may  / ' ' 'May' '=';
column  jun  / ' ' 'June' '=';
column  qtr2 / 'Quarter' 'Summary' '=';

column  jul  / ' ' 'July' '=' _page_;
column  aug  / ' ' 'August' '=';
column  sep  / ' ' 'September' '=';
column  qtr3 / 'Quarter' 'Summary' '=';

column  oct  / ' ' 'October' '=' _page_;
column  nov  / ' ' 'November' '=';
column  dec  / ' ' 'December' '=';
column  qtr4 / 'Quarter' 'Summary' '=';

/* specify order of rows and row titles */
row    sold    / ' ' 'Number Sold' f=8.;
row    revenue / ' ' 'Sales Revenue';
row    recd     / ' ' 'Number Received' f=8.;
row    cost     / ' ' 'Cost of' 'Items Received';
row    profit   / ' ' 'Profit' 'Within Period' ol;
row    pctmarg  / ' ' 'Profit Margin' dul;

/* select column for appropriate month */
_col_ = month + ceil( month / 3 ) - 1;

/* calculate quarterly summary columns */
colcalc:
    qtr1 = jan + feb + mar;
    qtr2 = apr + may + jun;
    qtr3 = jul + aug + sep;
    qtr4 = oct + nov + dec;

/* calculate profit rows */
rowcalc:
    profit = revenue - cost;
    if cost > 0 then pctmarg = profit / cost * 100;
run;

```

Output 9.4.1 Summary by Regions for the Equipment Division

XYZ Development Corporation
Corporate Headquarters: New York, NY
Profit Summary

-----SUMMARY TABLE: DIVISION=Equipment region=North Central-----

----- first quarter -----

	January	February	March	Quarter Summary
	=====	=====	=====	=====
Number Sold	198	223	119	540
Sales Revenue	22090.00	26830.00	14020.00	62940.00
Number Received	255	217	210	682
Cost of Items Received	24368.00	20104.00	19405.00	63877.00
	-----	-----	-----	-----
Profit Within Period	-2278.00	6726.00	-5385.00	-937.00
Profit Margin	-9.35	33.46	-27.75	-1.47
	=====	=====	=====	=====

Output 9.4.1 *continued*

XYZ Development Corporation
Corporate Headquarters: New York, NY
Profit Summary

-----SUMMARY TABLE: DIVISION=Equipment region=Northeast-----

----- first quarter -----

	January	February	March	Quarter Summary
	=====	=====	=====	=====
Number Sold	82	180	183	445
Sales Revenue	9860.00	21330.00	21060.00	52250.00
Number Received	162	67	124	353
Cost of Items Received	16374.00	6325.00	12333.00	35032.00
	-----	-----	-----	-----
Profit Within Period	-6514.00	15005.00	8727.00	17218.00
Profit Margin	-39.78	237.23	70.76	49.15
	=====	=====	=====	=====

Output 9.4.2 Profit Summary for the Equipment Division

XYZ Development Corporation Corporate Headquarters: New York, NY Profit Summary				
-----SUMMARY TABLE: DIVISION=Equipment-----				
----- first quarter -----				
	January	February	March	Quarter
	=====	=====	=====	=====
Number Sold	280	403	302	985
Sales Revenue	31950.00	48160.00	35080.00	115190.00
Number Received	417	284	334	1035
Cost of Items Received	40742.00	26429.00	31738.00	98909.00
	-----	-----	-----	-----
Profit Within Period	-8792.00	21731.00	3342.00	16281.00
Profit Margin	-21.58	82.22	10.53	16.46
	=====	=====	=====	=====

Output 9.4.3 shows the consolidation report of profit summary over both divisions and regions.

Output 9.4.3 Profit Summary

XYZ Development Corporation Corporate Headquarters: New York, NY Profit Summary				
-----SUMMARY TABLE: TOTALS-----				
----- first quarter -----				
	January	February	March	Quarter Summary
	=====	=====	=====	=====
Number Sold	590	683	627	1900
Sales Revenue	41790.00	55910.00	44800.00	142500.00
Number Received	656	673	734	2063
Cost of Items Received	46360.00	35359.00	40124.00	121843.00
	-----	-----	-----	-----
Profit Within Period	-4570.00	20551.00	4676.00	20657.00
Profit Margin	-9.86	58.12	11.65	16.95
	=====	=====	=====	=====

Example 9.5: Creating an Output Data Set

This example uses data and reports similar to those in [Example 9.3](#) to illustrate the creation of an output data set.

```
data product;
  input pcode div region month sold revenue recd cost;
datalines;
1 1 1 1 56 5600 29 2465
1 1 1 2 13 1300 30 2550
1 1 1 3 17 1700 65 5525
2 1 1 1 2 240 50 4900
2 1 1 2 82 9840 17 1666

... more lines ...

proc sort data=product out=sorted;
  by div region;
run;
```



```

/* create data set, profit */
proc computab data=sorted notrans out=profit noprint;
  by div region;
  sumby div;

  /* specify order of rows and row titles */
  row    jan feb mar qtr1;
  row    apr may jun qtr2;
  row    jul aug sep qtr3;
  row    oct nov dec qtr4;

  /* specify order of columns and column titles */
  columns sold revenue recd cost profit pctmarg;

  /* select row for appropriate month */
  _row_ = month + ceil( month / 3 ) - 1;

  /* calculate quarterly summary rows */
  rowcalc:
    qtr1 = jan + feb + mar;
    qtr2 = apr + may + jun;
    qtr3 = jul + aug + sep;
    qtr4 = oct + nov + dec;

  /* calculate profit columns */
  colcalc:
    profit = revenue - cost;
    if cost > 0 then pctmarg = profit / cost * 100;
run;

/* make a partial listing of the output data set */
options linesize=96;
proc print data=profit(obs=10) noobs;
run;

```

Because the NOTRANS option is specified, column names become variables in the data set. REGION has missing values in the output data set for observations associated with consolidation tables. The output data set PROFIT, in conjunction with the option NOPRINT, illustrates how you can use the computational features of PROC COMPUTAB for creating additional rows and columns as in a spreadsheet without producing a report. [Output 9.5.1](#) shows a partial listing of the output data set PROFIT.

Output 9.5.1 Partial Listing of the PROFIT Data Set

XYZ Development Corporation Corporate Headquarters: New York, NY Profit Summary									
div	region	_TYPE_	_NAME_	sold	revenue	recd	cost	PROFIT	PCTMARG
1	1	1	JAN	198	22090	255	24368	-2278	-9.348
1	1	1	FEB	223	26830	217	20104	6726	33.456
1	1	1	MAR	119	14020	210	19405	-5385	-27.751
1	1	1	QTR1	540	62940	682	63877	-937	-1.467
1	1	1	APR	82	9860	162	16374	-6514	-39.783
1	1	1	MAY	180	21330	67	6325	15005	237.233
1	1	1	JUN	183	21060	124	12333	8727	70.761
1	1	1	QTR2	445	52250	353	35032	17218	49.149
1	1	1	JUL	194	23210	99	10310	12900	125.121
1	1	1	AUG	153	17890	164	16704	1186	7.100

Example 9.6: A What-If Market Analysis

PROC COMPUTAB can be used with other SAS/ETS procedures and with macros to implement commonly needed decision support tools for financial and marketing analysis.

The following input data set reads quarterly sales figures:

```
data market;
  input date :yyq6. units @@;
  datalines;

  ... more lines ...
```

The following statements illustrate how PROC FORECAST makes a total market forecast for the next four quarters:

```
/* forecast the total number of units to be */
/* sold in the next four quarters */
proc forecast out=outcome trend=2
              interval=qtr lead=4;
  id date;
  var units;
run;
```

The macros WHATIF and SHOW build a report table and provide the flexibility of examining alternate what-if situations. The row and column calculations of PROC COMPUTAB compute the income statement. With macros stored in a macro library, the only statements required with PROC COMPUTAB are macro invocations and TITLE statements.

```

/* set up rows and columns of report and initialize */
/* market share and program constants */
%macro whatif(mktshr=,price=,ucost=,taxrate=,numshar=,overhead=);

    columns mar / ' ' 'March';
    columns jun / ' ' 'June';
    columns sep / ' ' 'September';
    columns dec / ' ' 'December';
    columns total / 'Calculated' 'Total';
    rows mktshr / 'Market Share'          f=5.2;
    rows tunits / 'Market Forecast';
    rows units / 'Items Sold';
    rows sales / 'Sales';
    rows cost / 'Cost of Goods';
    rows ovhd / 'Overhead';
    rows gprof / 'Gross Profit';
    rows tax / 'Tax';
    rows pat / 'Profit After Tax';
    rows earn / 'Earnings per Share';

    rows mktshr--earn / skip;
    rows sales--earn / f=dollar12.2;
    rows tunits units / f=commal2.2;

    /* initialize market share values */
    init mktshr &mktshr;

    /* define constants */
    retain price &price ucost &ucost taxrate &taxrate
           numshar &numshar;

    /* retain overhead and sales from previous quarter */
    retain prevovhd &overhead prevsale;
%mend whatif;

/* perform calculations and print the specified rows */
%macro show(rows);

    /* initialize list of row names */
    %let row1 = mktshr;
    %let row2 = tunits;
    %let row3 = units;
    %let row4 = sales;
    %let row5 = cost;
    %let row6 = ovhd;
    %let row7 = gprof;
    %let row8 = tax;
    %let row9 = pat;
    %let row10 = earn;

    /* find parameter row names in list and eliminate */
    /* them from the list of noprint rows */
    %let n = 1;

```

```

%let word = %scan(&rows,&n);
%do %while(&word NE );
  %let i = 1;
  %let row11 = &word;
  %do %while(&&row&i NE &word);
    %let i = %eval(&i+1);
  %end;
  %if &i<11 %then %let row&i = ;
  %let n = %eval(&n+1);
  %let word = %scan(&rows,&n);
%end;

rows &row1 &row2 &row3 &row4 &row5 &row6 &row7
      &row8 &row9 &row10 dummy / noprint;

/* select column using lead values from proc forecast */
mar = _lead_ = 1;
jun = _lead_ = 2;
sep = _lead_ = 3;
dec = _lead_ = 4;

rowreln;;
  /* inter-relationships */
  share = round( mktshr, 0.01 );
  tunits = units;
  units = share * tunits;
  sales = units * price;
  cost = units * ucost;

  /* calculate overhead */
  if mar then prevsale = sales;
  if sales > prevsale
    then ovhd = prevovhd + .05 * ( sales - prevsale );
    else ovhd = prevovhd;
  prevovhd = ovhd;
  prevsale = sales;
  gprof = sales - cost - ovhd;
  tax = gprof * taxrate;
  pat = gprof - tax;
  earn = pat / numshar;

coltot;;
  if mktshr
    then total = ( mar + jun + sep + dec ) / 4;
    else total = mar + jun + sep + dec;
%mend show;
run;

```

The following PROC COMPUTAB statements use the PROC FORECAST output data set with invocations of the macros defined previously to perform a what-if analysis of the predicted income statement. The report is shown in [Output 9.6.1](#).

```

title1 'Fleet Footwear, Inc.';
title2 'Marketing Analysis Income Statement';

```

```

title3 'Based on Forecasted Unit Sales';
title4 'All Values Shown';

options linesize=96;

proc computab data=outcome cwidth=12;

    %whatif(mktshr=.02 .07 .15 .25,price=38.00,
           ucost=20.00,taxrate=.48,numshr=15000,overhead=5000);

    %show(mktshr tunits units sales cost ovhd gprof tax pat earn);
run;

```

Output 9.6.1 PROC COMPUTAB Report That Uses Macro Invocations

Fleet Footwear, Inc. Marketing Analysis Income Statement Based on Forecasted Unit Sales All Values Shown					
	March	June	September	December	Calculated Total
Market Share	0.02	0.07	0.15	0.25	0.12
Market Forecast	23,663.94	24,169.61	24,675.27	25,180.93	97,689.75
Items Sold	473.28	1,691.87	3,701.29	6,295.23	12,161.67
Sales	\$17,984.60	\$64,291.15	\$140,649.03	\$239,218.83	\$462,143.61
Cost of Goods	\$9,465.58	\$33,837.45	\$74,025.80	\$125,904.65	\$243,233.48
Overhead	\$5,000.00	\$7,315.33	\$11,133.22	\$16,061.71	\$39,510.26
Gross Profit	\$3,519.02	\$23,138.38	\$55,490.00	\$97,252.47	\$179,399.87
Tax	\$1,689.13	\$11,106.42	\$26,635.20	\$46,681.19	\$86,111.94
Profit After Tax	\$1,829.89	\$12,031.96	\$28,854.80	\$50,571.28	\$93,287.93
Earnings per Share	\$0.12	\$0.80	\$1.92	\$3.37	\$6.22

The following statements produce a similar report for different values of market share and unit costs. The report in [Output 9.6.2](#) displays the values for the market share, market forecast, sales, after-tax profit, and earnings per share.

```

title3 'Revised';
title4 'Selected Values Shown';

options linesize=96;

proc computab data=outcome cwidth=12;
    %whatif(mktshr=.01 .06 .12 .20,price=38.00,

```

```

      ucost=23.00,taxrate=.48,numshar=15000,overhead=5000);
      %show(mktshr tunits sales pat earn);
run;

```

Output 9.6.2 Report That Uses Macro Invocations for Selected Values

Fleet Footwear, Inc. Marketing Analysis Income Statement Revised Selected Values Shown					
	March	June	September	December	Calculated Total
Market Share	0.01	0.06	0.12	0.20	0.10
Market Forecast	23,663.94	24,169.61	24,675.27	25,180.93	97,689.75
Sales	\$8,992.30	\$55,106.70	\$112,519.22	\$191,375.06	\$367,993.28
Profit After Tax	\$-754.21	\$7,512.40	\$17,804.35	\$31,940.30	\$56,502.84
Earnings per Share	\$-0.05	\$0.50	\$1.19	\$2.13	\$3.77

Example 9.7: Cash Flows

The COMPUTAB procedure can be used to model cash flows from one time period to the next. The RETAIN statement is useful for enabling a row or column to contribute one of its values to its successor. Financial functions such as IRR (internal rate of return) and NPV (net present value) can be used on PROC COMPUTAB table values to provide a more comprehensive report. The following statements produce [Output 9.7.1](#):

```

data cashflow;
  input date date9. netinc depr borrow invest tax div adv ;
datalines;
30MAR1982 65 42 32 126 43 51 41
30JUN1982 68 47 32 144 45 54 46
30SEP1982 70 49 30 148 46 55 47
30DEC1982 73 49 30 148 48 55 47
;

title1 'Blue Sky Endeavors';
title2 'Financial Summary';
title4 '(Dollar Figures in Thousands)';

proc computab data=cashflow;

  cols qtr1 qtr2 qtr3 qtr4 / 'Quarter' f=7.1;
  col qtr1 / 'One';
  col qtr2 / 'Two';

```

```

col qtr3 / 'Three';
col qtr4 / 'Four';
row begcash / 'Beginning Cash';
row netinc / 'Income' ' Net income';
row depr / 'Depreciation';
row borrow;
row subtot1 / 'Subtotal';
row invest / 'Expenditures' ' Investment';
row tax / 'Taxes';
row div / 'Dividend';
row adv / 'Advertising';
row subtot2 / 'Subtotal';
row cashflow/ skip;
row irret / 'Internal Rate' 'of Return' zero=' ';
rows depr borrow subtot1 tax div adv subtot2 / +3;

retain cashin -5;
_col_ = qtr( date );

rowblock:
    subtot1 = netinc + depr + borrow;
    subtot2 = tax + div + adv;
    begcash = cashin;
    cashflow = begcash + subtot1 - subtot2;
    irret = cashflow;
    cashin = cashflow;

colblock:
    if begcash then cashin = qtr1;
    if irret then do;
        temp = irr( 4, cashin, qtr1, qtr2, qtr3, qtr4 );
        qtr1 = temp;
        qtr2 = 0; qtr3 = 0; qtr4 = 0;
    end;

run;

```

Output 9.7.1 Report That Uses a RETAIN Statement and the IRR Financial Function

Blue Sky Endeavors Financial Summary				
(Dollar Figures in Thousands)				
	Quarter One	Quarter Two	Quarter Three	Quarter Four
Beginning Cash	-5.0	-1.0	1.0	2.0
Income				
Net income	65.0	68.0	70.0	73.0
Depreciation	42.0	47.0	49.0	49.0
BORROW	32.0	32.0	30.0	30.0
Subtotal	139.0	147.0	149.0	152.0
Expenditures				
Investment	126.0	144.0	148.0	148.0
Taxes	43.0	45.0	46.0	48.0
Dividend	51.0	54.0	55.0	55.0
Advertising	41.0	46.0	47.0	47.0
Subtotal	135.0	145.0	148.0	150.0
CASHFLOW	-1.0	1.0	2.0	4.0
Internal Rate of Return	20.9			

Chapter 10

The COPULA Procedure (Experimental)

Contents

Overview: COPULA Procedure	512
Getting Started: COPULA Procedure	512
Syntax: COPULA Procedure	516
Functional Summary	516
PROC COPULA Statement	518
BOUNDS Statement	518
BY Statement	518
DEFINE Statement	519
FIT Statement	519
SIMULATE Statement	521
VAR Statement	523
Details: COPULA Procedure	523
Sklar's Theorem	523
Dependence Measures	524
Normal Copula	525
Student's t copula	526
Archimedean Copulas	528
Canonical Maximum Likelihood Estimation (CMLE)	534
Exact Maximum Likelihood Estimation (MLE)	535
Calibration Estimation	535
Nonlinear Optimization Options	536
Displayed Output	536
OUTCOPULA= Data Set	538
OUTPSEUDO=, OUT=, and OUTUNIFORM= Data Sets	538
ODS Table Names	539
ODS Graph Names	539
Examples: COPULA Procedure	541
Example 10.1: Copula Based VaR Estimation	541
Example 10.2: Simulating Default Times	546
References	553

Overview: COPULA Procedure

A multivariate distribution for a random vector contains a description of both the marginal distributions and their dependence structure. A copula approach to formulating a multivariate distribution provides a way to isolate the description of the dependence structure from the marginal distributions. A copula is a function that combines marginal distributions of variables into a specific multivariate distribution. All of the one-dimensional marginals in the multivariate distribution are the cumulative distribution functions of the factors. Copulas help perform large-scale multivariate simulation from separate models, each of which can be fitted using different, even nonnormal, distributional specifications.

The COPULA procedure enables you to fit multivariate distributions or copulas from a given sample data set. You can do the following:

- estimate the parameters for a specified copula type
- simulate a given copula
- plot dependent relationships among the variables

The following types of copulas are supported:

- normal copula
- t copula
- Clayton copula
- Gumbel copula
- Frank copula

Getting Started: COPULA Procedure

The following example illustrates the use of PROC COPULA. The data used are daily returns on several major stocks. The main purpose of this example is to estimate the joint distribution of stock returns and then simulate from this distribution a new sample of specified size.

Figure 10.1 shows the first 10 observations of the daily stock return data set.

Figure 10.1 First 10 Observations of Daily Returns

Obs	date	ret_msft	ret_ko	ret_ibm	ret_duk	ret_bp
1	01/03/2008	0.004182	0.010367	0.002002	0.003503	0.019114
2	01/04/2008	-0.027960	0.001913	-0.035861	-0.000582	-0.014536
3	01/07/2008	0.006732	0.023607	-0.010671	0.025611	0.017922
4	01/08/2008	-0.033435	0.004239	-0.024610	-0.002838	-0.016049
5	01/09/2008	0.029560	0.026680	0.007301	0.010814	-0.027078
6	01/10/2008	-0.003054	0.004441	0.016414	-0.001689	-0.004395
7	01/11/2008	-0.012255	-0.027346	-0.022546	-0.012408	-0.018473
8	01/14/2008	0.013958	0.008418	0.053857	0.003427	0.001166
9	01/15/2008	-0.011318	-0.010851	-0.010689	-0.017075	-0.040925
10	01/16/2008	-0.022587	-0.015021	-0.001955	0.002316	-0.021336

The following statements fit a normal copula to the returns data (with the FIT statement) and create a new SAS data set that contains parameter estimates of the model. The VAR statement specifies the list of variables, which in this case are the daily returns of five large company stocks.

```

/* Copula estimation */
proc copula data = returns;
  var ret_ibm ret_msft ret_bp ret_ko ret_duk;
  fit normal / outcopula=estimates;
run;

```

The first table in [Figure 10.2](#) shows some general information about the copula fitting procedure: the number of observations, the name of the input data set, the type of model and the correlation matrix.

Figure 10.2 Copula Estimation: Fit Summary and Correlation Matrix

The COPULA Procedure					
Model Fit Summary					
Number of Observations			603		
Data Set			WORK.RETURNS		
Model			Normal		
Correlation Matrix					
	ret_ibm	ret_msft	ret_bp	ret_ko	ret_duk
ret_ibm	1.000000000	0.623161741	0.529368606	0.472457515	0.490165022
ret_msft	0.623161741	1.000000000	0.522909718	0.501507922	0.456725646
ret_bp	0.529368606	0.522909718	1.000000000	0.398018155	0.437770169
ret_ko	0.472457515	0.501507922	0.398018155	1.000000000	0.528328599
ret_duk	0.490165022	0.456725646	0.437770169	0.528328599	1.000000000

Next, the following statements restrict the data set to only those columns that contain correlation parameter estimates.

```

/* keep only correlation estimates */
data estimates;
    set estimates;
    keep ret_ibm ret_msft ret_bp ret_ko ret_duk;
run;

```

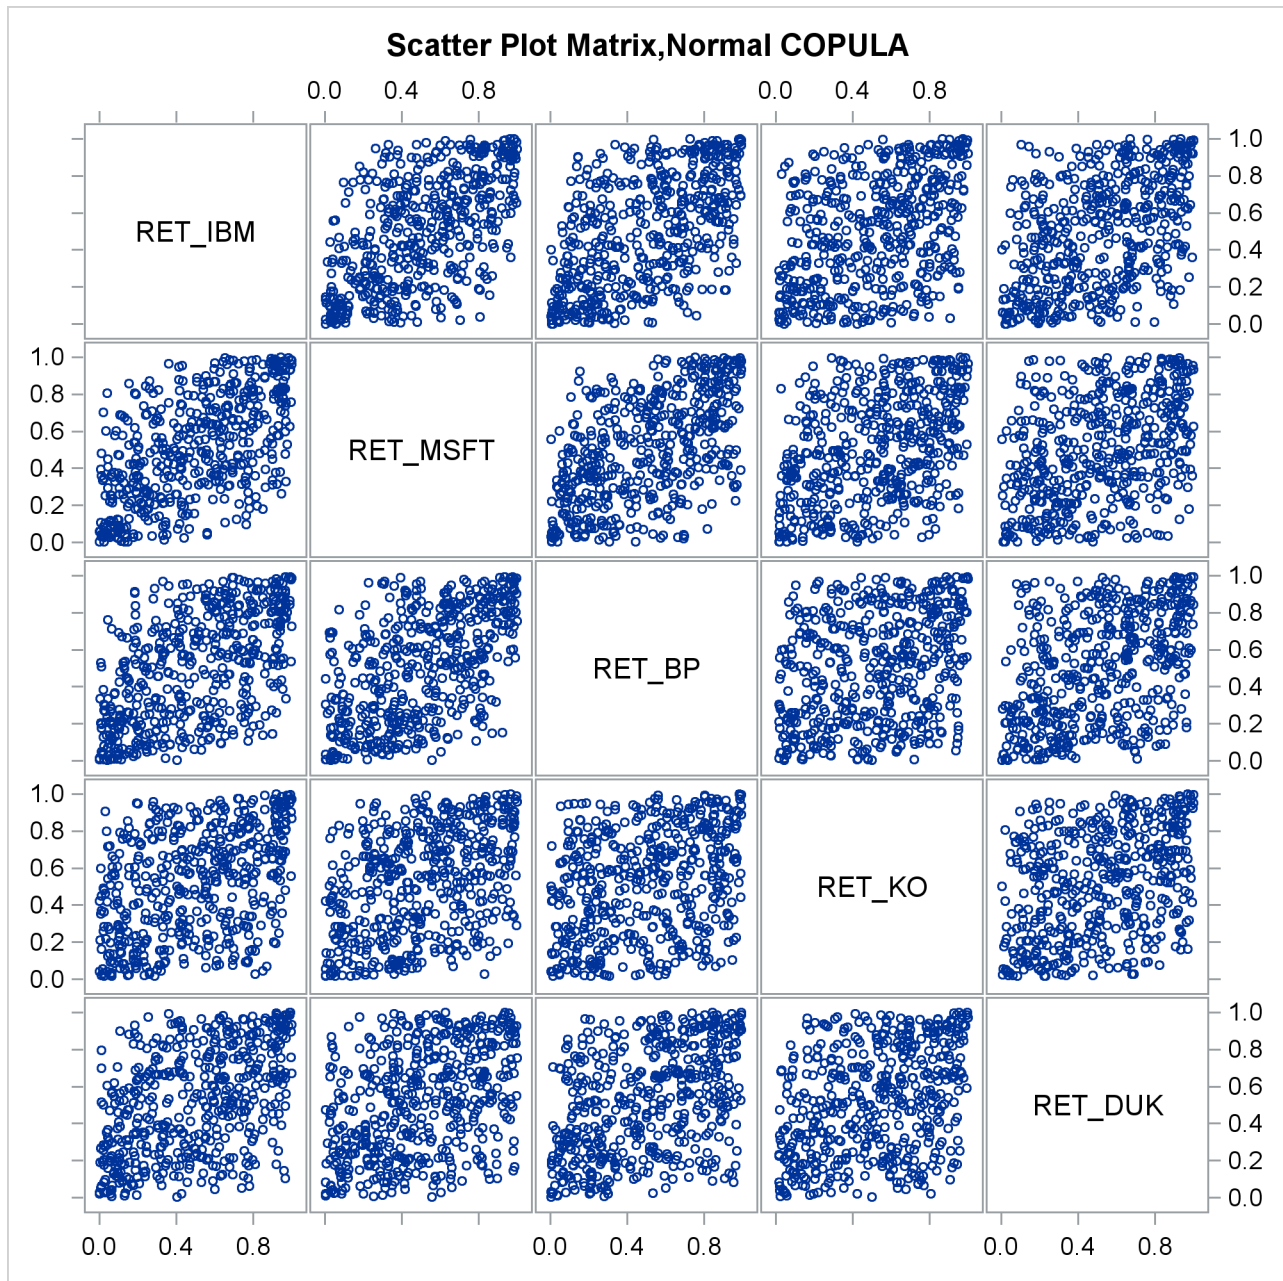
Then, in the following statements, the DEFINE statement specifies a normal copula named COP, and the COR= option specifies that the data set Estimates be used as the source for the model parameters. The NDRAWS=1000 option in the SIMULATE statement generates 500 observations from the normal copula. The OUTUNIFORM= option specifies the name of SAS data set to contain the simulated sample with uniform marginal distributions. Note that this syntax does not require the DATA= option.

```

/* Copula simulation of uniforms */
proc copula;
    var ret_ibm ret_msft ret_bp ret_ko ret_duk;
    define cop normal (cor = estimates);
    simulate cop / ndraws      = 500
                  outuniform = simulated_uniforms
                  plots=(data=uniform matrix);
run;

```

The simulated data is contained in the new SAS data set, Simulated_Uniforms. A scatter plot matrix of uniform marginals contained in the data set is shown in [Output 10.3](#).

Figure 10.3 Simulated Data, Uniform Marginals

The preceding sequence of PROC COPULA usage—first fit, then simulate given estimated parameters—is a legitimate sequence but has a limitation in that the second COPULA call does not generate the sample according to the empirical distribution of the raw data. It generates only marginally uniform series.

In the following statements, the FIT statement fits a t copula to the returns data and at the same time simulates the sample according to empirical marginal distributions:

```
/* Copula estimation and simulation of returns */
proc copula data = returns;
  var ret_ibm ret_msft ret_bp ret_ko ret_duk;
```

```

fit T;
simulate / ndraws = 1000
           out    = simulated_returns;
run;

```

The output of the statements is similar in structure to the output displayed in Figure 10.2 with the addition of parameter estimates and inference statistics that are specific to the copula model as shown in Figure 10.4. For a t copula, the degrees of freedom are displayed (as in Figure 10.4); for Archimedean copulas, the parameter “theta” is displayed; and for a normal copula, this table is not printed.

Figure 10.4 Copula Estimation: Specific Parameter Estimates

The COPULA Procedure				
Parameter Estimates				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
DF	3.659320	0.320729	11.41	<.0001

The simulated data is contained in the new SAS data set, Simulated_Returns.

Syntax: COPULA Procedure

The COPULA procedure is controlled by the following statements:

```

PROC COPULA options ;
  VAR variables ;
  DEFINE name copula-type < ( parameter-value-options ... ) > < other-options ... > ;
  FIT type < NAME=name > < INIT=(parameter-value-options) > / options ;
  BOUNDS bound1 < , bound2 ... > ;
  SIMULATE < copula-name-list > / options ;
  BY variables ;

```

Functional Summary

Table 10.1 summarizes the statements and options used with the COPULA procedure.

Table 10.1 COPULA Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	COPULA	DATA=

Description	Statement	Option
Specifies the input data set that contains the correlation matrix for elliptical copulas	DEFINE	COR=
Declaring the Role of Variables		
Specifies the names of the variables to use in copula fitting or in simulation	VAR	
Specifies BY-group processing	BY	
Printing Control Options		
Prints a summary iteration listing	FIT	ITPRINT
Suppresses the normal printed output	FIT	NOPRINT
Requests all printing options	FIT	PRINTALL
Suppresses the correlation matrix printed output	FIT	NOCORR
Options to Control the Optimization Process		
Sets boundary restrictions on parameters	BOUNDS	
Selects the iterative minimization method to use	FIT	METHOD=
Sets initial values for parameters	FIT	INIT=
Copula Estimation Options		
Specifies the marginal distribution of the individual variables	FIT	MARGINALS=
Copula Simulation Options		
Specifies the marginal distribution of the simulated variables	SIMULATE	MARGINALS=
Specifies the random sample size	SIMULATE	NDRAWS=
Specifies the random number generator seed	SIMULATE	SEED=
Output Control Options		
Specifies the output data set to contain the fitted copula values	FIT	OUTCOPULA=
Specifies the output data set to contain pseudo-samples with the uniform marginal distribution	FIT	OUTPSEUDO=
Specifies the output data set to contain the random samples from the simulation	SIMULATE	OUT=
Specifies the output data set to contain the random samples from the simulation with uniform marginal distribution	SIMULATE	OUTUNIFORM=

PROC COPULA Statement

PROC COPULA *<option>* ;

The PROC COPULA statement has the following option:

DATA= *<libref.>SAS-data-set*

specifies the input data set used to estimate parameters for the FIT statement. When the procedure is used for simulation only, the input data set is not required to run the procedure. If you do not specify *libref*, then the Work library is used. Work is the default temporary library that is automatically defined by SAS at the beginning of each SAS session or job.

BOUNDS Statement

BOUNDS *bound1 <, bound2 ... >* ;

The BOUNDS statement specifies the lower and upper bounds for the parameters. You can use this statement only when maximum likelihood estimation is used for the specified copula. Each bound is composed of parameters, constants, and inequality operators in the following format:

operator item < operator item < operator item ... >

Each item is a constant, parameter, or list of parameters. Parameters associated with a regressor variable are referred to by the name of the corresponding regressor variable. Each operator is *<*, *>*, *<=*, or *>=*. The following example indicates that the lower and upper bounds for the parameter THETA are -5 and 10 , respectively.

```
bounds -5 < THETA < 10;
```

If you do not specify bounds, the internal default values are used; the default values are described in the section “[Details: COPULA Procedure](#)” on page 523. For the normal and *t* copulas, the correlation matrix uses only the default parameter bounds, which are -1 and 1 for lower bound and upper bound, respectively.

BY Statement

BY *variables* ;

The BY statement specifies groups in which separate FIT analyses for copula are performed. The *variables* must be present in the input data set and are excluded from the model fitting. The BY statement requires the VAR statement to be present.

DEFINE Statement

DEFINE *name copula-type* < (*parameter-value-options* ...) > ;

The DEFINE statement specifies the relevant information of the copula used for the simulation.

name specifies the name of the copula definition, which can be used later in the SIMULATE statement.

copula-type specifies one of the following types of the copula:

NORMAL	fits the normal copula
T	fits the <i>t</i> copula
CLAYTON	fits the Clayton copula
GUMBEL	fits the Gumbel copula
FRANK	fits the Frank copula

These copula models are also described in the section “[Details: COPULA Procedure](#)” on page 523.

parameter-value-options

specify the input parameters used to simulate the specified copula. These options must be appropriate for the type of copula specified. The following options are valid:

COR=SAS-data-set

specifies the data set to read in the correlation matrix to use for elliptical copulas. This option can be used for the normal and *t* copulas.

DF=value

specifies the degrees of freedom. This option can be used for the *t* copula.

THETA=value

specifies the parameter value for the Archimedean copulas.

The DEFINE statement is used with the SIMULATE statement. The FIT statement can also be used with SIMULATE statement. The results of the FIT statement can be the input of the SIMULATE statement. Therefore, the SIMULATE statement can follow the FIT statement. If there is no FIT statement, then the DEFINE statement must precede SIMULATE statement. However, the FIT and DEFINE statements cannot both be used in the same procedure.

FIT Statement

FIT *type* < **NAME=name** > < **INIT=(parameter-value-options)** > /options ;

The FIT statement estimates the parameters for a specified copula type.

type

specifies the type of the copula to be estimated, which is one of the following:

NORMAL	fits the normal copula
T	fits the t copula
CLAYTON	fits the Clayton copula
GUMBEL	fits the Gumbel copula
FRANK	fits the Frank copula

NAME=*name*

specifies an identifier for the fit, which is stored as an ID variable in the OUTCOPULA= data set.

INIT=(*parameter-value-options*)

provides the initial values for the numerical optimization. For Archimedean copulas, the initial values of the parameter are computed using the calibration method. The initial value for the degrees-of-freedom parameter in the t copula is set to 2.0.

The following *options* can be specified:

METHOD=MLE | CAL

specifies the method used to estimate parameters. MLE represents canonical maximum likelihood estimation (CMLE) or maximum likelihood estimation (MLE). CAL is the calibration method that uses the correlation matrix (only Kendall's tau is implemented in this procedure). For the t copula, if METHOD=CAL, then the correlation matrix is estimated using the calibration method with Kendall's tau and the degrees of freedom are estimated by the MLE. For the normal copula, only MLE is supported and METHOD=CAL is ignored. The default for all copula types is METHOD=MLE.

OUTCOPULA=*SAS-data-set*

specifies the name of the output data set. Each fitted copula is written to the OUTCOPULA= data set. The data set is not created if this option is not specified.

OUTPSEUDO=*SAS-data-set*

specifies the output data set for saving the pseudo-samples with uniform marginal distributions. The pseudo-samples are obtained by transforming the individual variables of the original data with the empirical cumulative distribution functions (CDFs). The data set is not created if this option is not specified.

MARGINALS=UNIFORM | EMPIRICAL

specifies the marginal distribution of the individual variables. If MARGINALS=UNIFORM, then the copula is fitted with the input data without transformation. If MARGINALS=EMPIRICAL, the marginal empirical CDF is used to transform the data and the copula is fitted using the transformed data.

PLOTS<=*plot-request*>

controls the plots that are produced by the COPULA procedure. You can specify any of the following *plot-requests*:

DATA=ORIGINAL | UNIFORM | BOTH

requests the data type to be plotted. DATA=ORIGINAL presents the data in its original marginal distribution; DATA=UNIFORM shows the transformed data with uniform marginal distribution; and DATA=BOTH plots both the original and uniform data types. If MARGINALS=UNIFORM, then the transformation is omitted and the DATA= option is ignored.

MATRIX <(*matrix-options*)>

requests a scatter plot matrix for variables. That is, the procedure displays a symmetric matrix plot with the variables that are specified in the VAR statement.

SCATTER <(*scatter-options*)>

requests scatter plots for pairs of variables. That is, the procedure displays a scatter plot for each applicable pair of distinct variables that are specified in the VAR statement.

By default, PLOTS=MATRIX: a scatter plot matrix for all variables is displayed.

The available *matrix-options* and *scatter-options* are as follows:

NVAR=ALL | *n*

specifies the maximum number of variables specified in the VAR statement to be displayed in the matrix plot. The NVAR=ALL option uses all variables that are specified in the VAR statement. By default, NVAR=5.

Printing Options

ITPRINT

prints a summary iteration listing.

PRINT = PRINTALL | NOCORR | NOPRINT

controls what output is printed. PRINT=PRINTALL is the default option. PRINT= NOCORR suppresses the correlation matrix. PRINT=NOPRINT suppresses all output.

SIMULATE Statement

SIMULATE <*copula-name-list*>/*options* ;

The SIMULATE statement simulates data from a specified copula model. The copula name specification can be either the name of a defined copula as specified by *name* in the DEFINE statement or the name of a fitted copula specified in the NAME= option in the FIT statement copula specification.

MARGINALS=UNIFORM | EMPIRICAL

specifies how the marginal distributions are computed. If MARGINALS=UNIFORM, then the samples are drawn from the copula distribution and marginal distributions are uniform.

MARGINALS=EMPIRICAL can be used to explicitly specify that the marginal distributions are empirical CDF computed from the DATA= option in the PROC COPULA statement.

If the MARGINALS= option is not specified in the SIMULATE statement, then the marginal distributions used in the simulation depend on whether a preceding FIT statement was used: If there is no FIT statement, the marginal distributions depend on whether the PROC COPULA statement includes a DATA= option. If there is a preceding FIT statement, then the marginal distributions from that fit are used. If there is no FIT statement and there is no DATA= option, then MARGINALS=UNIFORM.

OUT=SAS-data-set

specifies the output data set for the random samples from the simulation. This data set is the SAS data set in the OUTUNIFORM= option transformed by the inverse empirical CDF. This option is useful only when an input data exists and MARGINALS=EMPIRICAL. The data set is not created if this option is not specified.

OUTUNIFORM=SAS-data-set

specifies the output data set for the result of the simulation in uniforms. This option can be used when MARGINALS=UNIFORM or when MARGINALS=EMPIRICAL. If MARGINALS=EMPIRICAL, then this option enables you to obtain the samples simulated from the joint distribution specified by the copula, with all marginal distributions being uniform. The data is not created if this option is not specified.

NDRAWS=integer

specifies the number of draws to generate for this simulation. The default is 100.

SEED=integer

specifies the seed for generating random numbers for the simulation. If the seed is not provided, a random number is used as the seed.

PLOTS <=plot-request-options>

controls the plots that are produced by the COPULA procedure. You can specify any of the following *plot-request-options*:

DATA=ORIGINAL | UNIFORM | BOTH

requests the data type to be plotted. DATA=ORIGINAL presents the data in its original marginal distribution; DATA=UNIFORM shows the transformed data with uniform marginal distribution; and DATA=BOTH plots both the original and uniform data types. If MARGINALS=UNIFORM, then the transformation is omitted and the DATA= option is ignored. If there is no input data, then the simulated data can only have uniform marginal distributions; in this case, the DATA= option is ignored.

MATRIX <(matrix-options)>

requests a scatter plot matrix for variables. That is, the procedure displays a symmetric matrix plot with the variables that are specified in the VAR statement.

SCATTER <(scatter-options)>

requests scatter plots for pairs of variables. That is, the procedure displays a scatter plot for each applicable pair of distinct variables that are specified in the VAR statement.

The available *matrix-options* and *scatter-options* are as follows:

NVAR=ALL | n

specifies the maximum number of variables specified in the VAR statement to be displayed in the matrix plot. The NVAR=ALL option uses all variables that are specified in the VAR statement. By default, NVAR=5.

DISTRIBUTION=PDF | CDF

requests distributional graphs for the case of two variables. DISTRIBUTION=PDF specifies that the theoretical probability density function is provided with both a contour plot and a surface plot. DISTRIBUTION=CDF requests the graph for the theoretical cumulative distribution function of the copula.

VAR Statement

VAR variables ;

The VAR statement specifies the variable names in the input data set specified by the DATA= option in the PROC COPULA statement. The subset of variables in the data set is used for the copula models in the FIT statement. When there is no input data set, the VAR statement creates the names of the list of variables for the SIMULATE statement.

Details: COPULA Procedure

Sklar's Theorem

The copula models are tools for studying the dependence structure of multivariate distributions. The usual joint distribution function contains the information both about the marginal behavior of the individual random variables and about the dependence structure between the variables. The copula is introduced to decouple the marginal properties of the random variables and the dependence structures. A m -dimensional *copula* is a joint distribution function on $[0, 1]^m$ with all marginal distributions being standard uniform. The common notation for a copula is $C(u_1, \dots, u_m)$.

The Sklar (1959) theorem shows the importance of copulas in modeling multivariate distributions. The first part claims that a copula can be derived from any joint distribution functions, and the second part asserts the opposite: that is, any copula can be combined with any set of marginal distributions to result in a multivariate distribution function.

- Let F be a joint distribution function and $F_j, j = 1, \dots, m$ be the marginal distributions. Then there exists a copula $C : [0, 1]^m \rightarrow [0, 1]$ such that

$$F(x_1, \dots, x_m) = C(F_1(x_1), \dots, F_m(x_m))$$

for all x_1, \dots, x_m in $[-\infty, \infty]$. Moreover, if the margins are continuous, then C is unique; otherwise C is uniquely determined on $\text{Ran}F_1 \times \dots \times \text{Ran}F_m$, where $\text{Ran}F_j = F_j([-\infty, \infty])$ is the range of F_j .

- The converse is also true. That is, if C is a copula and F_1, \dots, F_m are univariate distribution functions, then the multivariate function defined in the preceding equation is a joint distribution function with marginal distributions $F_j, j = 1, \dots, m$.

Dependence Measures

There are three basic types of measures: linear correlation, rank correlation, and tail dependence. Linear correlation is given by

$$\rho \equiv \text{corr}(X, Y) = \frac{\text{cov}(X, Y)}{\sqrt{\text{var}(X)}\sqrt{\text{var}(Y)}}$$

The linear correlation coefficient carries very limited information about the joint properties of the variables. A well-known property is that uncorrelatedness does not imply independence, while independence implies noncorrelation. In addition, there exist distinct bivariate distributions that have the same marginal distribution and the same correlation coefficient. These results suggest that caution must be used when interpreting the linear correlation.

Another statistical measure of dependence is called rank correlation, which is nonparametric. Kendall's tau, for example, is the covariance between the sign statistic $X_1 - \tilde{X}_1$ and $X_2 - \tilde{X}_2$, where $(\tilde{X}_1, \tilde{X}_2)$ is an independent copy of (X_1, X_2) :

$$\rho_\tau \equiv E[\text{sign}(X_1 - \tilde{X}_1)(X_2 - \tilde{X}_2)]$$

The sign function (sometimes written as sgn) is defined by

$$\text{sign}(x) = \begin{cases} -1 & \text{if } x \leq 0 \\ 0 & \text{if } x = 0 \\ 1 & \text{if } x \geq 0 \end{cases}$$

Spearman's *rho* is the correlation between the transformed random variables:

$$\rho_S(X_1, X_2) \equiv \rho(F_1(X_1), F_2(X_2))$$

The variables are transformed by their distribution functions so that the transformed variables are uniformly distributed on $[0, 1]$. The rank correlations depend only on the copula of the random variables and are indifferent to the marginal distributions. Like linear correlation, the rank correlations have their limitations. In particular, there are different copulas that result in the same rank correlation.

A third measure focuses on only part of the joint properties between the variables. Tail dependence measures the dependence when both variables are at extreme values. Formally, they can be defined as the conditional probabilities of quantile exceedances. There are two types of tail dependence:

- The upper tail dependence, denoted λ_u , is

$$\lambda_u(X_1, X_2) \equiv \lim_{q \rightarrow 1^-} P(X_2 > F_2^{-1}(q) | X_1 > F_1^{-1}(q))$$

when the limit exists $\lambda_u \in [0, 1]$. Here F_j^{-1} is the quantile function (that is, the inverse of the CDF).

- The lower tail dependence is defined symmetrically.

Normal Copula

Let $u_j \sim U(0, 1)$ for $j = 1, \dots, m$, where $U(0, 1)$ represents the uniform distribution on the $[0, 1]$ interval. Let Σ be the correlation matrix with $m(m-1)/2$ parameters satisfying the positive semidefiniteness constraint. The normal copula can be written as

$$C_\Sigma(u_1, u_2, \dots, u_m) = \Phi_\Sigma(\Phi^{-1}(u_1), \dots, \Phi^{-1}(u_m))$$

where Φ is the distribution function of a standard normal random variable and Φ_Σ is the m -variate standard normal distribution with mean vector 0 and covariance matrix Σ . That is, the distribution Φ_Σ is $N_m(0, \Sigma)$.

Simulation

For the normal copula, the input of the simulation is the correlation matrix Σ . The normal copula can be simulated by the following steps in which $\mathbf{U} = (U_1, \dots, U_m)$ denotes one random draw from the copula:

1. Generate a multivariate normal vector $\mathbf{Z} \sim N(0, \Sigma)$ where Σ is an m -dimensional correlation matrix.
2. Transform the vector \mathbf{Z} into $\mathbf{U} = (\Phi(Z_1), \dots, \Phi(Z_m))^T$, where Φ is the distribution function of univariate standard normal.

The first step can be achieved by Cholesky decomposition of the correlation matrix $\Sigma = LL^T$ where L is a lower triangular matrix with positive elements on the diagonal. If $\tilde{\mathbf{Z}} \sim N(0, I)$, then $L\tilde{\mathbf{Z}} \sim N(0, \Sigma)$.

Fitting

To fit a normal copula is to estimate the covariance matrix Σ from an input sample data set. Given a random sample $\mathbf{u}_i = (u_{i,1}, \dots, u_{i,m})^T$ where $i = 1, \dots, n$, the log-likelihood function is

$$\begin{aligned} \log L(\Sigma; \mathbf{u}_1, \dots, \mathbf{u}_n) \\ = \sum_{t=1}^n \log f_\Sigma(\Phi^{-1}(u_{t,1}), \dots, \Phi^{-1}(u_{t,m})) - \sum_{t=1}^n \sum_{j=1}^m \log \phi(\Phi^{-1}(u_{t,j})) \end{aligned}$$

Here f_Σ is the joint density of the multivariate normal with mean zero and variance Σ , and ϕ is the univariate density of the standard normal distribution. Note that the second term is not related to the parameters Σ

and, therefore, can be ignored during the optimization. The restriction that Σ is a correlation matrix is very inconvenient, and it is common practice to circumvent this problem by first assuming that Σ has the covariance form. Therefore, Σ can be estimated by

$$\hat{\Sigma} = \frac{1}{n} \sum_{i=1}^n \xi_i \xi_i^T$$

where

$$\xi_i = (\Phi^{-1}(u_{i,1}), \Phi^{-1}(u_{i,2}), \dots, \Phi^{-1}(u_{i,m}))^T$$

This estimate is consistent with the form of a covariance matrix but not necessarily with the form of a correlation matrix. The approximation to the original MLE problem can be obtained using the normalizing operator defined as follows:

$$\begin{aligned} \Delta(\Sigma) &= \text{diag}(\sigma_{11}^{1/2}, \dots, \sigma_{mm}^{1/2}) \\ \mathcal{P}(\Sigma) &= (\Delta(\Sigma))^{-1} \Sigma (\Delta(\Sigma))^{-1} \end{aligned}$$

Student's t copula

Let $\Theta = \{(\nu, \Sigma) : \nu \in (1, \infty), \Sigma \in \mathbb{R}^{m \times m}\}$ and let t_ν be a univariate t distribution with ν degrees of freedom.

The Student's t copula can be written as

$$C_\Theta(u_1, u_2, \dots, u_m) = t_{\nu, \Sigma}(t_\nu^{-1}(u_1), t_\nu^{-1}(u_2), \dots, t_\nu^{-1}(u_m))$$

where $t_{\nu, \Sigma}$ is the multivariate Student's t distribution with a correlation matrix Σ with ν degrees of freedom.

Simulation

The input parameters for the simulation are (ν, Σ) . The t copula can be simulated by the following the two steps:

1. Generate a multivariate vector $\mathbf{X} \sim t_m(\nu, 0, \Sigma)$ following the centered t distribution with ν degrees of freedom and correlation matrix Σ .
2. Transform the vector \mathbf{X} into $\mathbf{U} = (t_\nu(X_1), \dots, t_\nu(X_m))^T$, where t_ν is the distribution function of univariate t distribution with ν degrees of freedom.

To simulate centered multivariate t random variables, you can use the property that $\mathbf{X} \sim t_m(\nu, 0, \Sigma)$ if $\mathbf{X} = \sqrt{\nu/s} \mathbf{Z}$, where $\mathbf{Z} \sim N(0, \Sigma)$ and the univariate random variable $s \sim \chi_\nu^2$.

Fitting

To fit a t copula is to estimate the covariance matrix Σ and degrees of freedom ν from a given multivariate data set. Given a random sample $\mathbf{u}_i = (u_{i,1}, \dots, u_{i,m})^\top$, $i = 1, \dots, n$ that has uniform marginal distributions, the log likelihood is

$$\begin{aligned} \log L(\nu, \Sigma; u_{i,1}, \dots, u_{i,m}) \\ = \sum_{i=1}^n \log g_{\nu, \Sigma}(t_\nu^{-1}(u_{i,1}), \dots, t_\nu^{-1}(u_{i,m})) - \sum_{i=1}^n \sum_{j=1}^m \log g_\nu(t_\nu^{-1}(u_{i,j})) \end{aligned}$$

where ν denotes the degrees of freedom of the t copula, $g_{\nu, \Sigma}$ denotes the joint density function of the centered multivariate t distribution with parameters (ν, Σ) , t_ν is the distribution function of a univariate t distribution with ν degrees of freedom, Σ is a correlation matrix, and g_ν is the density function of univariate t distribution with ν degrees of freedom.

The log likelihood can be maximized with respect to the parameters $\theta = (\nu, \Sigma) \in \Theta$ using numerical optimization. If you allow the parameters in Σ to be such that Σ is symmetric and with ones on the diagonal, then the MLE estimate for Σ might not be positive semidefinite. In that case, you need to apply the adjustment to convert the estimated matrix to positive semidefinite, as shown by McNeil, Frey, and Embrechts (2005), Algorithm 5.55.

When the dimension of the data m increases, the numerical optimization quickly becomes infeasible. It is common practice to estimate the correlation matrix Σ by calibration using Kendall's tau. Then, using this fixed Σ , the single parameter ν can be estimated by MLE. By proposition 5.37 in McNeil, Frey, and Embrechts (2005),

$$\rho_\tau(U_i, U_j) = \frac{2}{\pi} \arcsin \rho_{ij}$$

where ρ_τ is the Kendall's tau and ρ_{ij} is the off-diagonal elements of the correlation matrix Σ of the t copula. Therefore, an estimate for the correlation is

$$\hat{\rho}_{ij} = \sin \left(\frac{1}{2} \pi \hat{\rho}_{i,j}^\tau \right)$$

where $\hat{\rho}$ and $\hat{\rho}^\tau$ are the estimates of the sample correlation matrix and Kendall's tau, respectively. However, it is possible that the estimate of the correlation matrix $\hat{\Sigma}$ is not positive definite. In this case, there is a standard procedure that uses the eigenvalue decomposition to transform the correlation matrix into one that is positive definite. Let Σ be a symmetric matrix with ones on the diagonal, with off-diagonal entries in $[-1, 1]$. If Σ is not positive semidefinite, use Algorithm 5.55 from McNeil, Frey, and Embrechts (2005):

1. Compute the eigenvalue decomposition $\Sigma = EDE^T$, where D is a diagonal matrix that contains all the eigenvalues and E is an orthogonal matrix that contains the eigenvectors.
2. Construct a diagonal matrix \tilde{D} by replacing all negative eigenvalues in D by a small value $\delta > 0$.
3. Compute $\tilde{\Sigma} = E\tilde{D}E^T$, which is positive definite but not necessarily a correlation matrix.
4. Apply the normalizing operator \mathcal{P} on the matrix $\tilde{\Sigma}$ to obtain the correlation matrix desired.

The log likelihood function and its gradient function for a single observation are listed as follows, where $\xi = (\xi_1, \dots, \xi_m)$, with $\xi_j = t_v^{-1}(u_j)$, and g is the derivative of the log Γ function:

$$\begin{aligned}
l = \log(c) &= -\frac{1}{2} \log(|\Sigma|) + \log \Gamma\left(\frac{\nu+m}{2}\right) + (m-1) \log \Gamma\left(\frac{\nu}{2}\right) - m \log \Gamma\left(\frac{\nu+1}{2}\right) \\
&\quad - \frac{\nu+m}{2} \log(1 + \xi^T \Sigma^{-1} \xi / \nu) + \frac{\nu+1}{2} \sum_{j=1}^m \log\left(1 + \frac{\xi_j^2}{\nu}\right) \\
\frac{\partial l}{\partial \nu} &= \frac{1}{2} g\left(\frac{\nu+m}{2}\right) + \frac{m-1}{2} g\left(\frac{\nu}{2}\right) - \frac{m}{2} g\left(\frac{\nu+1}{2}\right) \\
&\quad - \frac{1}{2} \log(1 + \xi^T \Sigma^{-1} \xi / \nu) + \frac{\nu+m}{2\nu^2} \frac{\xi^T \Sigma^{-1} \xi}{1 + \xi^T \Sigma^{-1} \xi / \nu} \\
&\quad + \frac{1}{2} \sum_{j=1}^m \log(1 + \xi_j^2 / \nu) - \frac{\nu+1}{2\nu^2} \sum_{j=1}^m \frac{\xi_j^2}{1 + \xi_j^2 / \nu} \\
&\quad - \frac{(\nu+m)}{\nu} \frac{\xi^T \Sigma^{-1} (d\xi/d\nu)}{1 + \xi^T \Sigma^{-1} \xi / \nu} + \frac{\nu+1}{\nu} \sum_{j=1}^m \frac{\xi_j (d\xi_j/d\nu)}{1 + \xi_j^2 / \nu}
\end{aligned}$$

The derivative of the likelihood with respect to the correlation matrix Σ follows:

$$\begin{aligned}
\frac{\partial l}{\partial \Sigma} &= -\frac{1}{2} (\Sigma^{-1})^T + \frac{\nu+m}{2} \frac{\Sigma^{-T} \xi \xi^T \Sigma^{-T} / \nu}{1 + \xi^T \Sigma^{-1} \xi / \nu} \\
&= -\frac{1}{2} (\Sigma^{-1})^T + \frac{\nu+m}{2} \frac{\Sigma^{-T} \xi \xi^T \Sigma^{-T}}{\nu + \xi^T \Sigma^{-1} \xi}
\end{aligned}$$

Archimedean Copulas

Overview of Archimedean Copulas

Let function $\phi : [0, 1] \rightarrow [0, \infty)$ be a strict Archimedean copula generator function and suppose its inverse ϕ^{-1} is completely monotonic on $[0, \infty)$. A strict generator is a decreasing function $\phi : [0, 1] \rightarrow [0, \infty)$ that satisfies $\phi(0) = \infty$ and $\phi(1) = 0$. A decreasing function $f(t) : [a, b] \rightarrow (-\infty, \infty)$ is completely monotonic if it satisfies

$$(-1)^k \frac{d^k}{dt^k} f(t) \geq 0, k \in \mathbb{N}, t \in (a, b)$$

An Archimedean copula is defined as follows:

$$C(u_1, u_2, \dots, u_m) = \phi^{-1}\left(\phi(u_1) + \dots + \phi(u_m)\right)$$

The Archimedean copulas available in the COPULA procedure are the Clayton copula, the Frank copula, and the Gumbel copula.

Clayton Copula

Let the generator function $\phi(u) = \theta^{-1} (u^{-\theta} - 1)$. A Clayton copula is defined as

$$C_\theta(u_1, u_2, \dots, u_m) = \left[\sum_{i=1}^m u_i^{-\theta} - m + 1 \right]^{-1/\theta}$$

with $\theta > 0$.

Frank Copula

Let the generator function be

$$\phi(u) = -\log \left[\frac{\exp(-\theta u) - 1}{\exp(-\theta) - 1} \right]$$

A Frank copula is defined as

$$C_\theta(u_1, u_2, \dots, u_m) = \frac{1}{\theta} \log \left\{ 1 + \frac{\prod_{i=1}^m [\exp(-\theta u_i) - 1]}{[\exp(-\theta) - 1]^{m-1}} \right\}$$

with $\theta \in (-\infty, \infty) \setminus \{0\}$ for $m = 2$ and $\theta > 0$ for $m \geq 3$.

Gumbel Copula

Let the generator function $\phi(u) = (-\log u)^\theta$. A Gumbel copula is defined as

$$C_\theta(u_1, u_2, \dots, u_m) = \exp \left\{ - \left[\sum_{i=1}^m (-\log u_i)^\theta \right]^{1/\theta} \right\}$$

with $\theta > 1$.

Simulation

Suppose the generator of the Archimedean copula is ϕ . Then the simulation method using Laplace-Stieltjes transformation of the distribution function is given by Marshall and Olkin (1988) where $\tilde{F}(t) = \int_0^\infty e^{-tx} dF(x)$:

1. Generate a random variable V with the distribution function F such that $\tilde{F}(t) = \phi^{-1}(t)$.
2. Draw samples from independent uniform random variables X_1, \dots, X_m .
3. Return $\mathbf{U} = (\tilde{F}(-\log(X_1)/V), \dots, \tilde{F}(-\log(X_m)/V))^T$.

The Laplace-Stieltjes transformations are as follows:

- For the Clayton copula, $\tilde{F} = (1+t)^{-1/\theta}$, and the distribution function F is associated with a Gamma random variable with shape parameter θ^{-1} and scale parameter one.
- For the Gumbel copula, $\tilde{F} = \exp(-t^{1/\theta})$, and F is the distribution function of the stable variable $\text{St}(\theta^{-1}, 1, \gamma, 0)$ with $\gamma = [\cos(\pi/(2\theta))]^\theta$.
- For the Frank copula with $\theta > 0$, $\tilde{F} = -\log\{1 - \exp(-t)[1 - \exp(-\theta)]\}/\theta$, and F is a discrete probability function $P(V = k) = (1 - \exp(-\theta))^k / (k\theta)$. This probability function is related to a logarithmic random variable with parameter value $1 - e^{-\theta}$.

For details about simulating a random variable from a stable distribution, see Theorem 1.19 in Nolan (2010). For details about simulating a random variable from a logarithmic series, see Chapter 10.5 in Devroye (1986).

For a Frank copula with $m = 2$ and $\theta < 0$, the simulation can be done through conditional distributions as follows:

1 Draw independent v_1, v_2 from a uniform distribution.

2 Let $u_1 = v_1$.

3 Let $u_2 = -\frac{1}{\theta} \log \left(1 + \frac{v_2(1-e^{-\theta})}{v_2(e^{-\theta v_1}-1)-e^{-\theta v_1}} \right)$.

Fitting

One method to estimate the parameters is to calibrate with Kendall's tau. The relation between the parameter θ and Kendall's tau is summarized in the following table for the three Archimedean copulas.

Table 10.2 Calibration Using Kendall's Tau

Copula Type	τ	Formula for θ
Clayton	$\theta/(\theta + 2)$	$2\tau/(1 - \tau)$
Gumbel	$1 - 1/\theta$	$1/(1 - \tau)$
Frank	$1 - 4\theta^{-1}(1 - D_1(\theta))$	No closed form

In Table 10.2, $D_1(\theta) = \theta^{-1} \int_0^\theta t/(\exp(t) - 1)dt$ for $\theta > 0$, and $D_1(\theta) = D_1(\theta) + 0.5\theta$ for $\theta < 0$. In addition, for the Frank copula, the formula for θ has no closed form. The numerical algorithm for root finding can be used to invert the function $\tau(\theta)$ to obtain θ as a function of τ .

Alternatively, you can use the MLE or the CMLE method to estimate the parameter θ given the data $\mathbf{u} = \{u_{i,j}\}$ and $i = 1, \dots, n, j = 1, \dots, m$. The log-likelihood function for each type of Archimedean copula is provided in the following sections.

Fitting the Clayton Copula

For the Clayton copula, the log-likelihood function is as follows (Cherubini, Luciano and Vecchiato 2004, Chapter 7):

$$l = n \left[m \log(\theta) + \log \left(\Gamma \left(\frac{1}{\theta} + m \right) \right) - \log \left(\Gamma \left(\frac{1}{\theta} \right) \right) \right] - (\theta + 1) \sum_{i,j} \log u_{ij} \\ - \left(\frac{1}{\theta} + m \right) \sum_i \log \left(\sum_j u_{ij}^{-\theta} - m + 1 \right)$$

Let $g(\cdot)$ be the derivative of $\log(\Gamma(\cdot))$. Then the first order derivative is

$$\frac{dl}{d\theta} = n \left[\frac{m}{\theta} + g \left(\frac{1}{\theta} + m \right) \frac{-1}{\theta^2} - g \left(\frac{1}{\theta} \right) \frac{-1}{\theta^2} \right] \\ - \sum_{i,j} \log(u_{ij}) + \frac{1}{\theta^2} \sum_i \log \left(\sum_j u_{ij}^{-\theta} - m + 1 \right) \\ - \left(\frac{1}{\theta} + m \right) \sum_i \frac{-\sum_j u_{ij}^{-\theta} \log(u_{ij})}{\sum_j u_{ij}^{-\theta} - m + 1}$$

The second order derivative is

$$\frac{d^2l}{d\theta^2} = n \left\{ \frac{-m}{\theta^2} + g' \left(\frac{1}{\theta} + m \right) \frac{1}{\theta^4} + g \left(\frac{1}{\theta} + m \right) \frac{2}{\theta^3} - g' \left(\frac{1}{\theta} \right) \frac{1}{\theta^4} - g \left(\frac{1}{\theta} \right) \frac{2}{\theta^3} \right\} \\ - \frac{2}{\theta^3} \sum_i \log \left(\sum_j u_{ij}^{-\theta} - m + 1 \right) \\ + \frac{2}{\theta^2} \sum_i \frac{-\sum_j u_{ij}^{-\theta} \log u_{ij}}{\sum_j u_{ij}^{-\theta} - m + 1} \\ - \left(\frac{1}{\theta} + m \right) \sum_i \left\{ \frac{\sum_j u_{ij}^{-\theta} (\log u_{ij})^2}{\sum_j u_{ij}^{-\theta} - m + 1} - \left(\frac{\sum_j u_{ij}^{-\theta} \log u_{ij}}{\sum_j u_{ij}^{-\theta} - m + 1} \right)^2 \right\}$$

Fitting the Gumbel Copula

A different parameterization $\alpha = \theta^{-1}$ is used for the following part, which is related to the fitting of the Gumbel copula. For Gumbel copula, you need to compute $\phi^{-1(m)}$. It turns out that for $k = 1, 2, \dots, m$,

$$\phi^{-1(k)}(u) = (-1)^k \alpha \exp(-u^\alpha) u^{-k+\alpha} \Psi_{k-1}(u^\alpha)$$

where Ψ_{k-1} is a function that is described later. The copula density is given by

$$c = \phi^{-1(m)}(x) \prod_k \phi'(u_k) \\ = (-1)^m \alpha \exp(-x^\alpha) x^{-k+\alpha} \Psi_{m-1}(x^\alpha) \prod_k \phi'(u_k) \\ = (-1)^m f_1 f_2 f_3 f_4 f_5$$

where $x = \sum_k \phi(u_k)$, $f_1 = \alpha$, $f_2 = \exp(-x^\alpha)$, $f_3 = x^{-k+\alpha}$, $f_4 = \Psi_{m-1}(x^\alpha)$, and $f_5 = (-1)^m \prod_k \phi'(u_k)$.

The log density is

$$\begin{aligned} l &= \log(c) \\ &= \log(f_1) + \log(f_2) + \log(f_3) + \log(f_4) + \log((-1)^m f_5) \end{aligned}$$

Now the first order derivative of the log density has the decomposition

$$\frac{dl}{d\alpha} = \frac{1}{c} \frac{dc}{d\alpha} = \sum_{j=1}^4 \frac{1}{f_j} \frac{df_j}{d\alpha} + \frac{d \sum_k \log(-\phi'(u_k))}{d\alpha}$$

Some of the terms are given by

$$\begin{aligned} \frac{1}{f_1} \frac{df_1}{d\alpha} &= \frac{1}{\alpha} \\ \frac{1}{f_2} \frac{df_2}{d\alpha} &= -x^\alpha \log(x) - \alpha x^{\alpha-1} \frac{dx}{d\alpha} \\ \frac{1}{f_3} \frac{df_3}{d\alpha} &= \log(x) + (-k + \alpha) x^{-1} \frac{dx}{d\alpha} \end{aligned}$$

where

$$\frac{dx}{d\alpha} = \sum (-\log u_k)^{1/\alpha} \log(-\log u_k) \left(\frac{-1}{\alpha^2} \right)$$

The last term in the derivative of the $dl/d\alpha$ is

$$\begin{aligned} \log(-\phi'(u_k)) &= \log\left(\frac{1}{\alpha} (-\log u_k)^{\frac{1}{\alpha}-1} \frac{1}{u_k}\right) \\ &= -\log \alpha - \log(u_k) + \left(\frac{1}{\alpha} - 1\right) \log(-\log(u_k)) \\ \frac{d \sum_k \log(-\phi'(u_k))}{d\alpha} &= \sum_{k=1}^m -\frac{1}{\alpha} - \frac{1}{\alpha^2} \log(-\log(u_k)) \\ &= -\frac{m}{\alpha} - \frac{1}{\alpha^2} \sum_{k=1}^m \log(-\log(u_k)) \end{aligned}$$

Now the only remaining term is f_4 , which is related to Ψ_{m-1} . Wu, Valdez, and Sherris (2007) show that $\Psi_k(x)$ satisfies a recursive equation

$$\Psi_k(x) = [\alpha(x-1) + k] \Psi_{k-1}(x) - \alpha x \Psi'_{k-1}(x)$$

with $\Psi_0(x) = 1$.

The preceding equation implies that $\Psi_{k-1}(x)$ is a polynomial of x and therefore can be represented as

$$\Psi_{k-1}(x) = \sum_{j=0}^{k-1} a_j(k-1, \alpha) x^j$$

In addition, its coefficient, denoted by $a_j(k-1, \alpha)$, is a polynomial of α . For simplicity, use the notation $a_j(\alpha) \equiv a_j(m-1, \alpha)$. Therefore,

$$f_4 = \Psi_{m-1}(x^\alpha) = \sum_{j=0}^{m-1} a_j(\alpha) x^{j\alpha}$$

$$\begin{aligned} \frac{df_4}{d\alpha} &= \frac{d\Psi_{m-1}(x^\alpha)}{d\alpha} \\ &= \sum_{j=0}^{m-1} \left[\frac{da_j(\alpha)}{d\alpha} x^{j\alpha} + a_j(\alpha) x^{j\alpha} \log(x) j + a_j(\alpha) (j\alpha) x^{j\alpha-1} \frac{dx}{d\alpha} \right] \end{aligned}$$

Fitting the Frank copula

For the Frank copula,

$$\phi^{-1(k)}(u) = -\frac{1}{\theta} \Psi_{k-1} \left((1 + e^{-u}(e^{-\theta} - 1))^{-1} \right)$$

When $\theta > 0$, a Frank copula has a probability density function

$$\begin{aligned} c &= \varphi^{-1(m)}(x) \prod_k \varphi'(u_k) \\ &= \frac{-1}{\theta} \Psi_{m-1} \left(\frac{1}{1 + e^{-x}(e^{-\theta} - 1)} \right) \prod_k \varphi'(u_k) \end{aligned}$$

where $x = \sum_k \varphi(u_k)$.

The log likelihood is

$$\log c = -\log(\theta) + \log \left(\Psi_{m-1} \left(\frac{1}{1 + e^{-x}(e^{-\theta} - 1)} \right) \right) + \sum \log(\varphi'(u_k))$$

Denote

$$y = \frac{1}{1 + e^{-x}(e^{-\theta} - 1)}$$

Then the derivative of the log likelihood is

$$\frac{d \log c}{d\theta} = -\frac{1}{\theta} + \frac{1}{\Psi_{m-1}(y)} \frac{d\Psi_{m-1}}{d\theta} + \sum_k \frac{1}{\varphi'(u_k)} \frac{d\varphi'(u_k)}{d\theta}$$

The term in the last summation is

$$\frac{1}{\varphi'(u_k)} \frac{d\varphi'(u_k)}{d\theta} = \frac{1}{\theta(1 - e^{\theta u_k})} [1 - e^{\theta u_k} + \theta u_k e^{\theta u_k}]$$

The function Ψ_{m-1} satisfies a recursive relation

$$\Psi_k(x) = x(x-1)\Psi'_{k-1}(x)$$

with $\Psi_0(x) = x - 1$. Note that Ψ_{m-1} is a polynomial whose coefficients do not depend on θ ; therefore,

$$\begin{aligned} \frac{d\Psi_{m-1}}{d\theta} &= \frac{d\Psi_{m-1}}{dy} \frac{dy}{d\theta} \\ &= \frac{d\Psi_{m-1}}{dy} \left[\frac{dy}{d\theta} + \frac{dy}{dx} \frac{dx}{d\theta} \right] \\ &= \frac{d\Psi_{m-1}}{dy} \left[\frac{e^{-x}e^{-\theta}}{[1 + e^{-x}(e^{-\theta} - 1)]^2} + \frac{e^{-x}(e^{-\theta} - 1)}{[1 + e^{-x}(e^{-\theta} - 1)]^2} \frac{dx}{d\theta} \right] \end{aligned}$$

where

$$\begin{aligned} \frac{dx}{d\theta} &= \sum_k \frac{d\varphi(u_k)}{d\theta} = \sum_k \left[-\frac{u_k e^{-\theta u_k}}{1 - e^{-\theta u_k}} + \frac{e^{-\theta}}{1 - e^{-\theta}} \right] \\ &= \sum_k \left[-\frac{u_k}{e^{\theta u_k} - 1} + \frac{1}{e^{\theta} - 1} \right] \end{aligned}$$

For the case of $m = 2$ and $\theta < 0$, the bivariate density is

$$\log c = \log(\theta) + \log(1 - e^{-\theta}) - \theta(u_1 + u_2) - 2 \log(1 - e^{-\theta} - (1 - e^{-\theta u_1})(1 - e^{-\theta u_2}))$$

Canonical Maximum Likelihood Estimation (CMLE)

In the CMLE estimation method, it is assumed that the sample data $\mathbf{x}_i = (x_{i1}, x_{i2}, \dots, x_{im})^\top$, $i = 1, \dots, n$ have been transformed into uniform variates $\hat{\mathbf{u}}_i = (\hat{u}_{i1}, \dots, \hat{u}_{im})$, $i = 1, \dots, n$. One commonly used transformation is the nonparametric estimation of the CDF of the marginal distributions, which is closely related to empirical CDF,

$$\hat{u}_{i,j} = \hat{F}_{j,n}(x_{i,j})$$

where

$$\hat{F}_{j,n}(x) = \frac{1}{n+1} \sum_{i=1}^n I_{[x_{i,j} \leq x]}$$

The transformed data $\hat{u}_{i,j}$ are used as if they had uniform marginal distributions; hence, they are called pseudo-samples. The function $\hat{F}_{j,n}$ is different from the standard empirical CDF in the scalar $1/(n+1)$,

which is to ensure that the transformed data cannot be on the boundary of the unit interval $[0, 1]$. It is clear that

$$\hat{u}_{i,j} = \frac{1}{n+1} \text{rank}(x_{i,j})$$

where $\text{rank}(x_{i,j})$ is the rank among $i = 1, \dots, n$ in increasing order.

Let $c(u_1, u_2, \dots, u_m; \theta)$ be the density function of a copula $C(u_1, u_2, \dots, u_m; \theta)$, and let θ be the parameter vector to be estimated. The parameter θ is estimated by maximum likelihood:

$$\hat{\theta} = \arg \max_{\theta \in \Theta} \sum_{i=1}^n \log c(\hat{u}_{i1}, \dots, \hat{u}_{im}; \theta)$$

Exact Maximum Likelihood Estimation (MLE)

Suppose that the marginal distributions of vector elements $\mathbf{x}_i = (x_{i1}, x_{i2}, \dots, x_{im})^\top$, $i = 1, \dots, n$ are already known to be uniform. Then the parameter θ is estimated by exact maximum likelihood:

$$\hat{\theta} = \arg \max_{\theta \in \Theta} \sum_{i=1}^n \log c(x_{i1}, x_{i2}, \dots, x_{im}; \theta).$$

Calibration Estimation

Instead of fitting the whole distribution as in MLE methods, you can directly use empirical estimates of distribution parameters. The unknown parameter that you want to estimate can be obtained by calibration using Kendall's tau. There exists a one-to-one map between the parameter at interest and Kendall's tau. Therefore, after you estimate the Kendall's tau, you can use the map to compute the parameter value. For example, the parameter matrix Σ in a t copula and the parameter θ in Archimedean copulas can be estimated in this manner. The most frequently used estimator of Kendall's tau is the rank correlation coefficient:

$$\hat{\rho}_\tau(X_i, X_j) = \left(\frac{n}{2} \right)^{-1} \sum_{1 \leq t < s \leq n} \text{sign}((x_{t,i} - x_{s,i})(x_{t,j} - x_{s,j}))$$

The preceding formula is analogous to its population counterpart

$$\rho_\tau(X_i, X_j) = E[\text{sign}((X_i - \tilde{X}_i)(X_j - \tilde{X}_j))]$$

where $(\tilde{X}_i, \tilde{X}_j)$ has the same distribution but is independent of (X_i, X_j) .

For Archimedean multivariate copulas there is only one parameter to estimate, τ (or its function θ), although for m variables there are $m(m-1)/2$ unique pairwise correlation coefficients. Denote the map from ρ_τ to θ by $\theta = \hat{\theta}(\rho_\tau)$. To aggregate the map, take simple arithmetic average:

$$\hat{\theta} = \frac{2}{m(m-1)} \sum_{1 \leq i < j \leq m} \hat{\theta}[\hat{\rho}_\tau(X_i, X_j)].$$

Nonlinear Optimization Options

PROC COPULA uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. In the PROC COPULA statement, you can specify nonlinear optimization options that are then passed to the NLO subsystem. For a list of all the nonlinear optimization options, see Chapter 6, “Nonlinear Optimization Methods.”

Displayed Output

PROC COPULA produces displayed output described in the following sections.

Optimization Start and Resulting Parameter Estimates

If you specify the ITPRINT option in the PROC COPULA statement, PROC COPULA displays two tables, “Optimization Start Parameter Estimates” and “Optimization Results Parameter Estimates.” Each table contains the following information for each model parameter:

- parameter number
- parameter name
- parameter estimate
- gradient of the objective function at the initial parameter values

In addition to this information, the table “Optimization Start Parameter Estimates” contains the following columns:

- lower-bound constraint
- upper-bound constraint

The value of the objective function at the parameter values is displayed below each table.

Iteration History for Parameter Estimates

If you specify the ITPRINT option in the PROC COPULA statement, PROC COPULA displays a table that contains the following information for each iteration. Note that some information is specific to the model-fitting method chosen (for example, Newton-Raphson, trust region, or quasi-Newton method).

- iteration number

- number of restarts since the fitting began
- number of function calls
- number of active constraints at the current solution
- value of the objective function (-1 times the log-likelihood value) at the current solution
- change in the objective function from previous iteration
- value of the maximum absolute gradient element
- step size (for Newton-Raphson and quasi-Newton methods)
- slope of the current search direction (for Newton-Raphson and quasi-Newton methods)
- lambda (for trust region method)
- radius value at current iteration (for trust region method)

Model Fit Summary

The “Model Fit Summary” table contains the following information:

- number of observations used
- number of missing values in data set, if any
- data set name
- type of model that was fit
- log-likelihood value at solution
- maximum absolute gradient at solution
- number of iterations
- optimization method
- value of Akaike’s information criterion (AIC) at the solution (a smaller value indicates better fit)
- value of Schwarz-Bayesian criterion (SBC) at the solution (a smaller value indicates better fit)

Under the “Model Fit Summary” is a statement about whether the algorithm successfully converged.

Parameter Estimates

The “Parameter Estimates” table contains the estimates of the model parameters. For the normal copula, this table is not displayed because the only parameters are in the correlation matrix, which is displayed in the “Correlation Matrix” table. For the t copula, the parameter is the number of degrees of freedom; in the table it is called “DF.” For Archimedean copulas such as Clayton, Frank, and Gumbel, the parameter is called “theta.”

Correlation Matrix

The “Correlation Matrix” table contains the estimates of the model correlation matrix. This table is displayed only for elliptical copulas such as the normal and t copulas. Row and column names come from the list of variables defined in VAR statement.

OUTCOPULA= Data Set

The OUTCOPULA= data set consists of several rows. The first row (with `_TYPE_='PARM'`) contains the parameter estimates in the model. For a t copula, the estimate is the number of degrees of freedom; for Archimedean copulas, the estimate is “theta.” The second row (with `_TYPE_='STD'`) contains the standard error for the parameter estimate in the model. These two rows do not appear for the normal copula.

If you use one of the elliptical copulas, t or normal, the rest of the data set contains the correlation matrix estimates. The correlation matrix appears in the observations with `_TYPE_='COR'`, and the `_VARIABLE_` column contains the parameter names.

If METHOD=MLE and the nonlinear optimization subsystem is used, a `_STATUS_` column is created that contains a character variable that indicates whether the optimization process reached convergence or failed to converge:

- 0 indicates that the convergence was reached
- 1 indicates that the maximum number of iterations allowed was exceeded
- 2 indicates a failure to improve the function value
- 3 indicates a failure to converge for one of the following reasons:
 - The objective function or its derivatives could not be evaluated or improved.
 - Linear constraints are dependent.
 - The algorithm failed to return to feasible region.
 - The number of iterations is greater than prespecified.

OUTPSEUDO=, OUT=, and OUTUNIFORM= Data Sets

The OUTPSEUDO=, OUT=, and OUTUNIF= data sets contain the same number of columns as specified in VAR statement. The names of the columns are taken from the same VAR statement list.

ODS Table Names

PROC COPULA assigns a name to each table it creates. You can use these names to denote the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in [Table 10.3](#).

Table 10.3 ODS Tables Produced in PROC COPULA

ODS Table Name	Description	Option
ODS Tables Created by the FIT Statement		
ConvergenceStatus	Convergence status	Default
Correlation	Correlation matrix estimates	Default with elliptical copulas
FitSummary	Summary of nonlinear estimation	Default
ParameterEstimates	Parameter estimates	Default
ConvergenceStatus	Convergence status	ITPRINT
InputOptions	Input options	ITPRINT
IterHist	Iteration history	ITPRINT
IterStart	Optimization start	ITPRINT
IterStop	Optimization results	ITPRINT
ParameterEstimatesResults	Parameter estimates	ITPRINT
ParameterEstimatesStart	Parameter estimates	ITPRINT
ProblemDescription	Problem description	ITPRINT

ODS Graph Names

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

PROC COPULA assigns a name to each graph it creates by using ODS. You can use these names to refer to the graphs when you use ODS. The names are listed in [Table 10.4](#).

Table 10.4 ODS Graphics Produced by PROC COPULA

ODS Graph Name	Plot Description	Statement	PLOTS= Option
MatrixPlotOrig	Matrix panel of pairwise scatter plots of the original data	FIT	DATA=BOTH MATRIX, DATA=ORIGINAL MATRIX
MatrixPlotUnif	Matrix panel of pairwise scatter plots of the original data transformed into uniform marginals	FIT	DATA=BOTH MATRIX, DATA=UNIFORM MATRIX
MatrixPlotSOrig	Matrix panel of pairwise scatter plots of the simulated data	SIMULATE	DATA=BOTH MATRIX, DATA=ORIGINAL MATRIX
MatrixPlotSUnif	Matrix panel of pairwise scatter plots of the simulated data transformed into uniform marginals	SIMULATE	DATA=BOTH MATRIX, DATA=UNIFORM MATRIX
ScatterPlotOrig	Pairwise scatter plots of the original data	FIT	DATA=BOTH SCATTER, DATA=ORIGINAL SCATTER
ScatterPlotUnif	Pairwise scatter plots of the original data transformed into uniform marginals	FIT	DATA=BOTH SCATTER, DATA=UNIFORM SCATTER
ScatterPlotSOrig	Pairwise scatter plots of the simulated data	SIMULATE	DATA=BOTH SCATTER, DATA=ORIGINAL SCATTER
ScatterPlotSUnif	Pairwise scatter plots of the simulated data transformed into uniform marginals	SIMULATE	DATA=BOTH SCATTER, DATA=UNIFORM SCATTER
CdfContourPlot	Contour plot of theoretical bivariate CDF function	SIMULATE	DISTRIBUTION=CDF
CdfSurfacePlot	Surface plot of theoretical bivariate CDF function	SIMULATE	DISTRIBUTION=CDF
PdfContourPlot	Contour plot of theoretical bivariate PDF function	SIMULATE	DISTRIBUTION=PDF
PdfSurfacePlot	Surface plot of theoretical bivariate PDF function	SIMULATE	DISTRIBUTION=PDF

Examples: COPULA Procedure

Example 10.1: Copula Based VaR Estimation

Value-at-risk (VaR) has become a de facto standard in financial risk management. The purpose of this measure is to give some quantitative insight to the riskiness of an asset portfolio. This measure is expressed generically in the following terms: What is the probability of losing no more than given percentage of a portfolio in a certain period of time? Or, what are the maximum possible losses at a given confidence level? The most simple and clearly wrong answer to this question is to compute the empirical quantile of past portfolio returns. The problem of this approach is that it does not take into account the dynamic nature of asset returns, the possibility of changing distribution, time memory, and, most importantly, cross-sectional dependence between individual assets in the portfolio.

This simple example of VaR computation takes into account at least cross-sectional dependence of the data. The end result is the prediction of the next-day maximum possible loss on the portfolio of stocks.

This example uses the daily returns on large stocks such as IBM, Microsoft, British Petroleum, Coca Cola, and Duke Energy. [Output 10.1.1](#) shows the first 10 observations of the data.

Output 10.1.1 First 10 Observations of Daily Returns

Obs	date	ret_msft	ret_ko	ret_ibm	ret_duk	ret_bp
1	01/03/2008	0.004182	0.010367	0.002002	0.003503	0.019114
2	01/04/2008	-0.027960	0.001913	-0.035861	-0.000582	-0.014536
3	01/07/2008	0.006732	0.023607	-0.010671	0.025611	0.017922
4	01/08/2008	-0.033435	0.004239	-0.024610	-0.002838	-0.016049
5	01/09/2008	0.029560	0.026680	0.007301	0.010814	-0.027078
6	01/10/2008	-0.003054	0.004441	0.016414	-0.001689	-0.004395
7	01/11/2008	-0.012255	-0.027346	-0.022546	-0.012408	-0.018473
8	01/14/2008	0.013958	0.008418	0.053857	0.003427	0.001166
9	01/15/2008	-0.011318	-0.010851	-0.010689	-0.017075	-0.040925
10	01/16/2008	-0.022587	-0.015021	-0.001955	0.002316	-0.021336

The purpose of this exercise is to estimate one-day future losses of a stock portfolio. The simplest approach is to assume that the joint distribution of individual asset returns does not change with time. This might be close to the truth if only a small time interval is used. Then, a copula approach is used to estimate the joint distribution. Next, the new large sample of daily individual asset returns is simulated from the fitted joint distribution. These assets are then combined into a portfolio and its daily returns are computed. Finally, quantiles of simulated portfolio returns (which simply represent possible next-day losses of the portfolio) are examined.

So, the first step is to cut off a small number of past return observations as in the following SAS data step:

```
/* Keep only the last 250 observations of the data */
data returns;
  set returns nobs=observ;
```

```

    if (_N_ > observ-250);
run;

```

The following statements fit a t copula to the returns data and at the same time simulate the sample from the fitted joint distribution:

```

/* Copula estimation and simulation of returns */
proc copula data = returns;
  var ret_ibm ret_msft ret_bp ret_ko ret_duk;
  * fit T-copula to stock returns;
  fit T /
    marginals = empirical
    method    = MLE
    plots     = (data = both matrix);
  * simulate 10000 observations;
  * independent in time, dependent in cross-section;
  simulate /
    ndraws = 10000
    seed   = 1234
    out    = simulated_returns
    plots  = (data = original scatter);
run;

```

The first line of COPULA procedure uses a VAR statement to specify the list of variables. In this example, these are daily returns of five large-company stocks. The next statement, FIT, requires some options. First, Student's t copula (T) is specified. After the slash, the MARGINALS=EMPIRICAL option specifies that an empirical distribution be fit. The choice of fitting method is MLE. The PLOTS=BOTH MATRIX option requests that both original and transformed data graphs be organized into a symmetric panel.

Then, given the estimation results, the NDRAWS= option in the SIMULATE statement simulates 10,000 new observations for each asset return series. The SEED= option fixes the random number generator, the OUT= option specifies the name of SAS data set to contain the simulated sample, and the PLOT= option requests scatter plots of simulated returns in the original data scale.

The output of these statements is shown in [Output 10.1.2](#).

Output 10.1.2 Copula Estimation

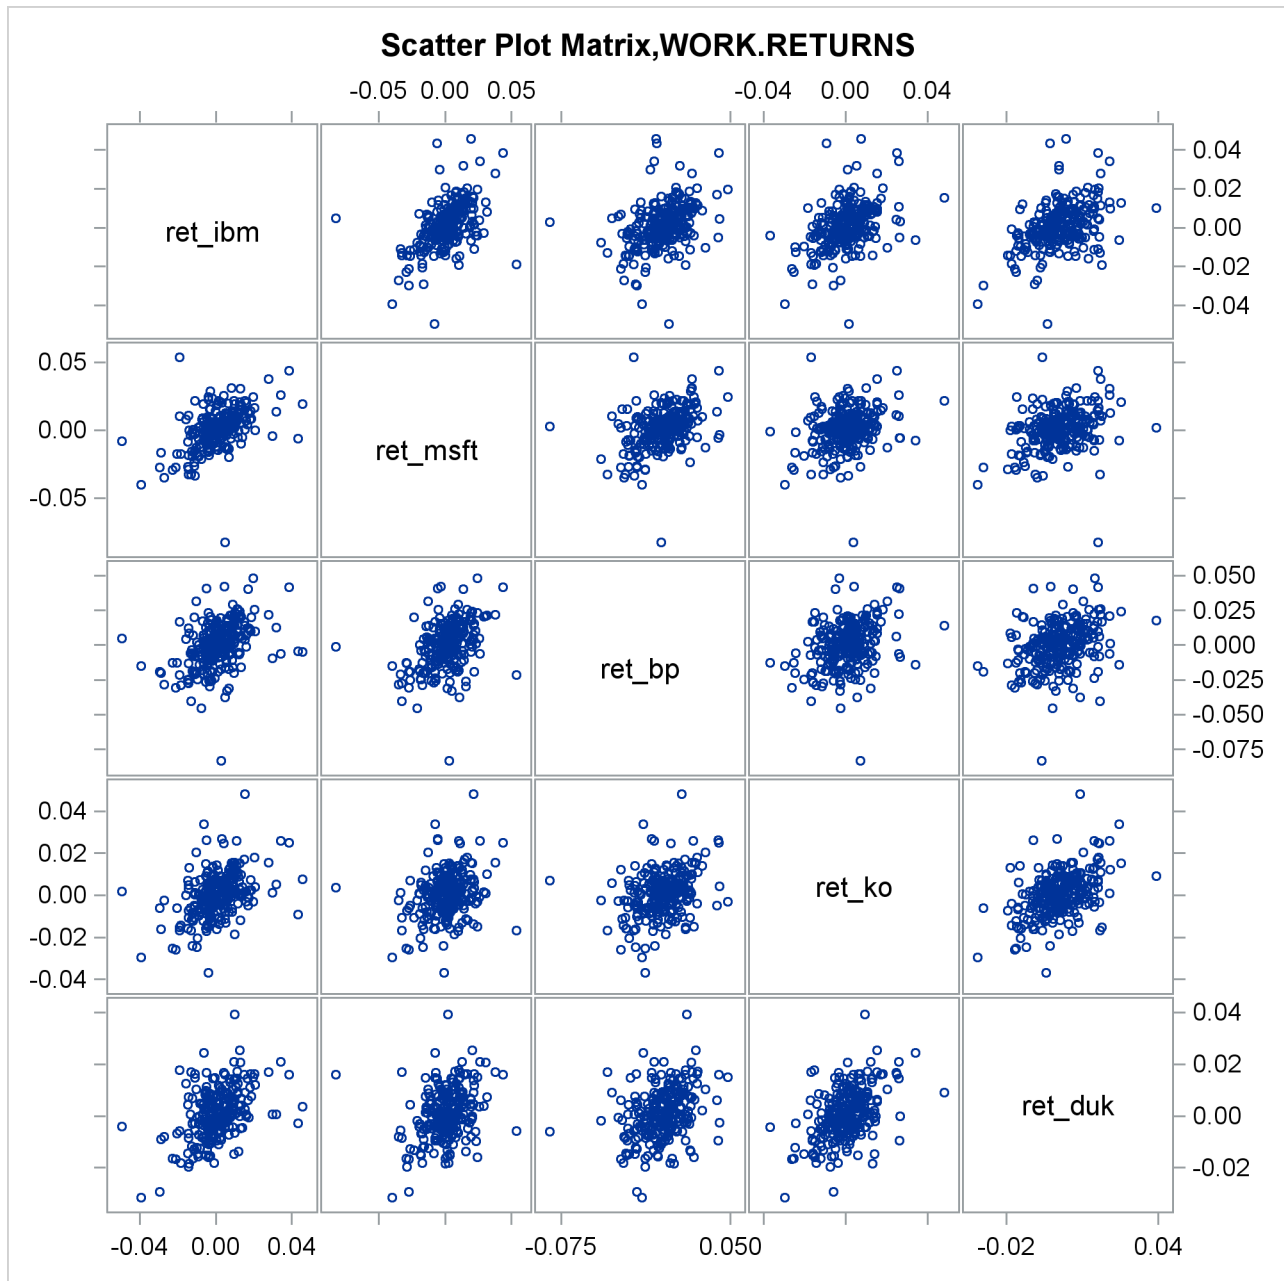
The COPULA Procedure	
Model Fit Summary	
Number of Observations	250
Data Set	WORK.RETURNS
Model	T
Log Likelihood	171.52064
Maximum Absolute Gradient	7.91523E-7
Number of Iterations	9
Optimization Method	Newton-Raphson
AIC	-321.04128
SBC	-282.30521

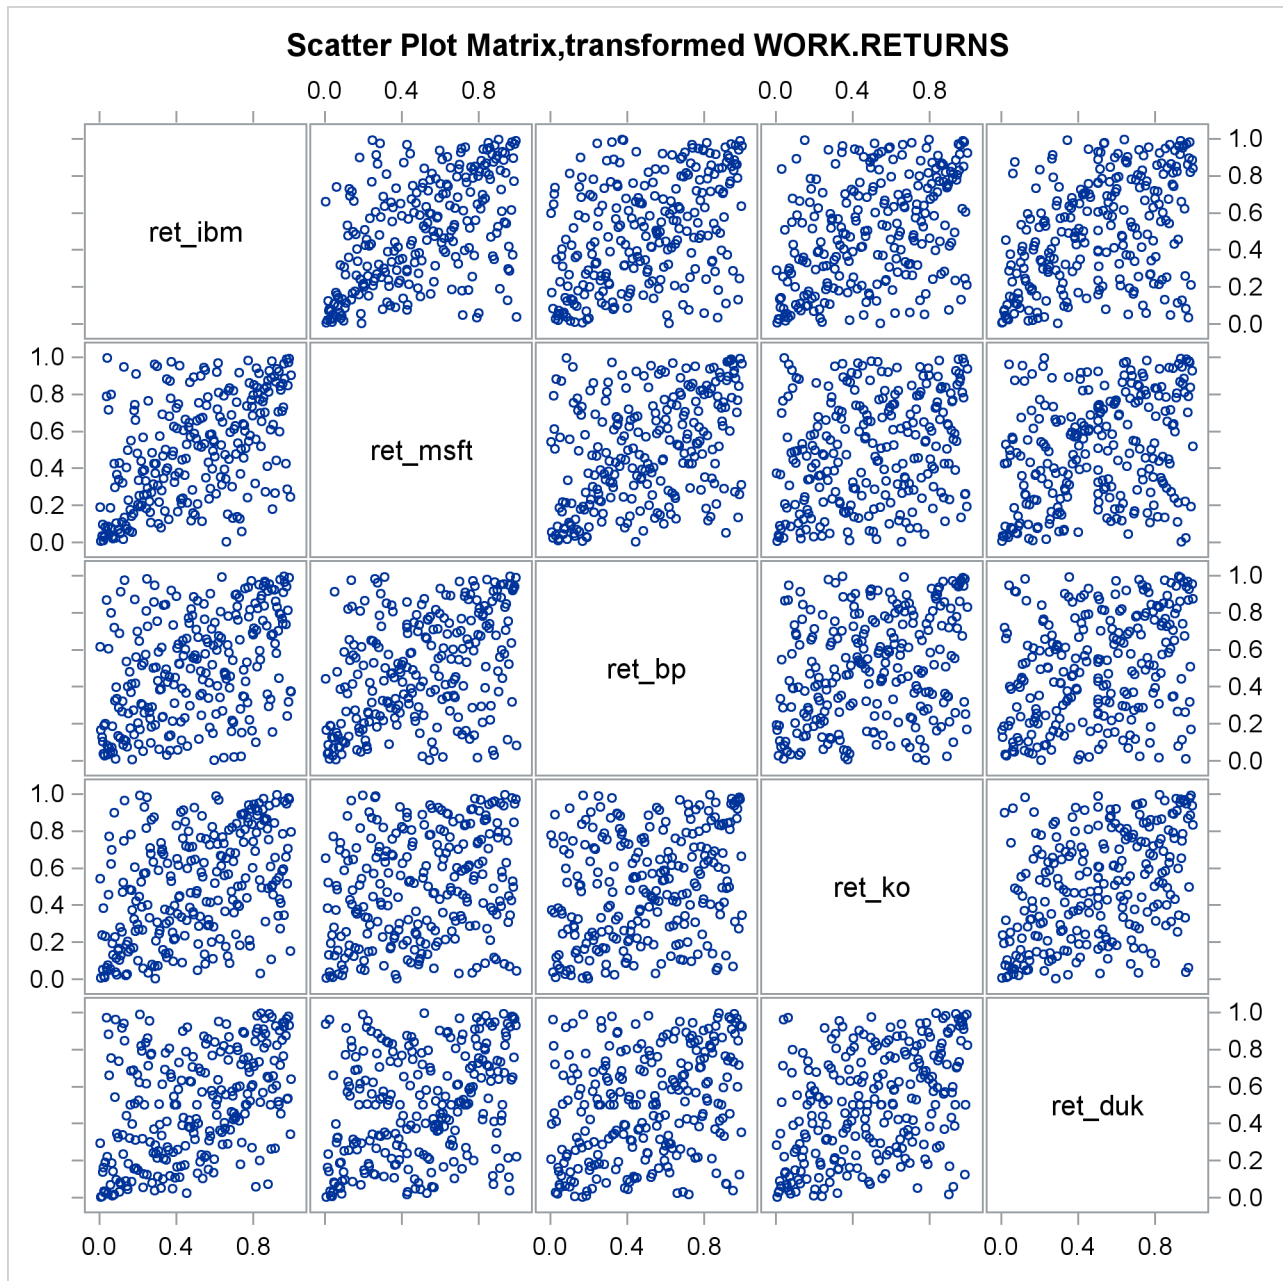
Output 10.1.2 *continued*

Parameter Estimates					
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	
DF	6.714101	1.338752	5.02	<.0001	
Correlation Matrix					
	ret_ibm	ret_msft	ret_bp	ret_ko	ret_duk
ret_ibm	1.000000000	0.565737845	0.466209147	0.454771683	0.474020099
ret_msft	0.565737845	1.000000000	0.458469772	0.323355456	0.365773073
ret_bp	0.466209147	0.458469772	1.000000000	0.345866479	0.357634010
ret_ko	0.454771683	0.323355456	0.345866479	1.000000000	0.474150256
ret_duk	0.474020099	0.365773073	0.357634010	0.474150256	1.000000000

The first table in [Output 10.1.2](#), “Model Fit Summary,” provides some general description of copula model estimation. The second table, “Parameter Estimates,” provides point estimates and inference on copula parameters. In this example the only parameter in this table is the number of degrees of freedom in the multivariate t distribution. The last table, “Correlation Matrix,” contains estimates of copula model parameters.

The graphical output of the preceding statements is in [Output 10.1.3](#) and in [Output 10.1.4](#).

Output 10.1.3 Original Data

Output 10.1.4 Original Data Transformed into Uniform Marginals

Note that in [Output 10.1.3](#) the most elliptical scatter plot, between IBM and MSFT, indicates the strongest dependence. Similarly, in [Output 10.1.4](#) those graphs that are denser along the diagonal indicate the same thing.

Now the equally weighted next day portfolio return is computed. Each individual return is transformed into nominal scale first, then all returns are added up with equal weights, and the result is transformed into a net return by subtracting one.

```
/* compute equally weighted portfolio return */
data port_ret (drop = i ret);
```

```

set simulated_returns;
array returns{5} ret_ibm ret_msft ret_bp ret_ko ret_duk;
ret =0;
do i =1 to 5;
    ret = ret+ 0.2*exp(returns[i]);
end;
port_ret = ret-1;
run;

```

The final step is to compute empirical quantiles of simulated daily portfolio return. This is done with the help of PROC UNIVARIATE in the following statements:

```

/* compute descriptive statistics */
/* quantile table will give Value-at-Risk estimates for the portfolio */
proc univariate data = port_ret;
    var port_ret;
run;

```

Output 10.1.5 shows that with 99% confidence the potential loss on an equally weighted portfolio over the next day does not exceed 2.7% (the number in table is multiplied by 100). You can also say that there is no more than 5% chance of losing 1.5% of the portfolio value. These percentage measures are exactly the value-at-risk.

Output 10.1.5 Return Quantiles

The UNIVARIATE Procedure	
Variable: port_ret	
Quantiles (Definition 5)	
Quantile	Estimate
100% Max	0.048144752
99%	0.026628900
95%	0.015538138
90%	0.011573970
75% Q3	0.005799792
50% Median	0.000688678
25% Q1	-0.004953853
10%	-0.010637126
5%	-0.014677418
1%	-0.026631117
0% Min	-0.052757715

Example 10.2: Simulating Default Times

Suppose the correlation structure required for a normal copula function is already given. For example, it can be estimated from the historic data on default times in some set of industries, but this stage is not in the scope of this example. The correlation structure is saved in a SAS data set called `lnparm`. The following statements and their output in Output 10.2.1 show that the correlation parameter is set at 0.8:

```
proc print data = inparm;
run;
```

Output 10.2.1 Copula Correlation Matrix

	Obs	COL1	COL2
	1	1.0	0.8
	2	0.8	1.0

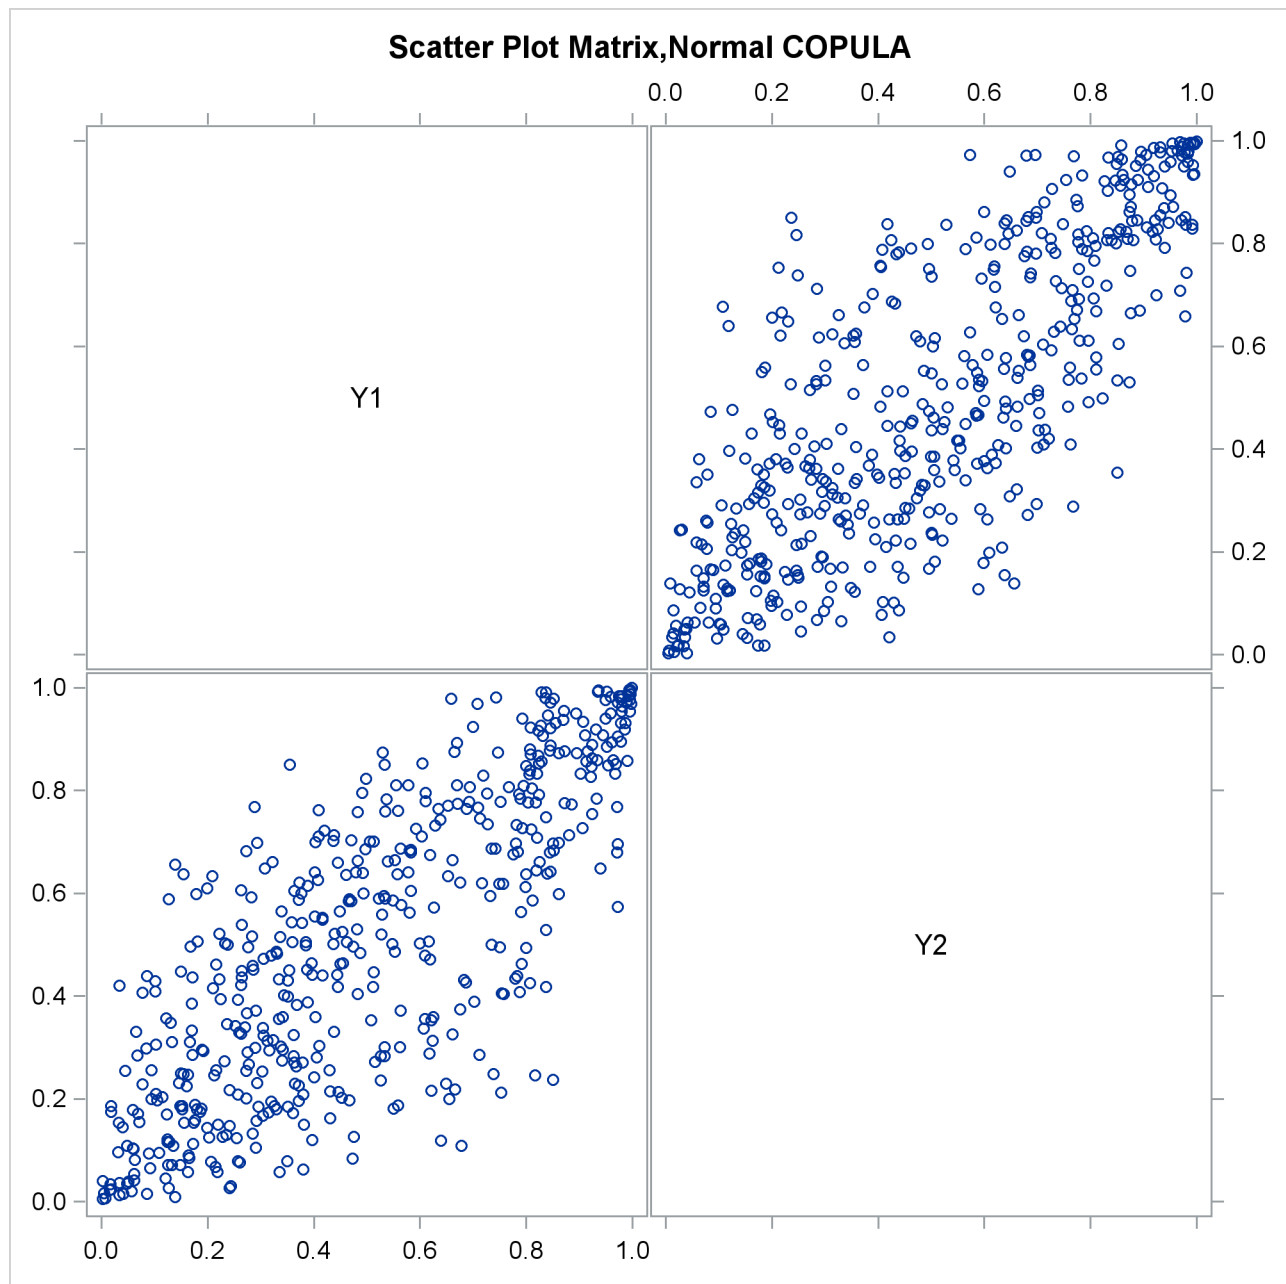
Now you use PROC COPULA to simulate the data. The VAR statement specifies the list of variables to contain simulated data. The DEFINE statement assigns the name COP and specifies a normal copula that reads the correlation matrix from the inparm data set.

The SIMULATE statement refers to the COP label defined in the VAR statement and specifies some options: the NDRAWS= option specifies a sample size, the SEED= option specifies 1234 as the random number generator seed, the OUTUNIFORM=NORMAL_UNIFDATA option names the output data set for the result of simulation in uniforms, and the PLOTS= option requests the matrix of data scatter plots and marginal distributions (DATA=ORIGINAL MATRIX) and theoretical cumulative distribution function contour and surface plots (DISTRIBUTION=CDF). Theoretical distribution graphs work only for the bivariate case.

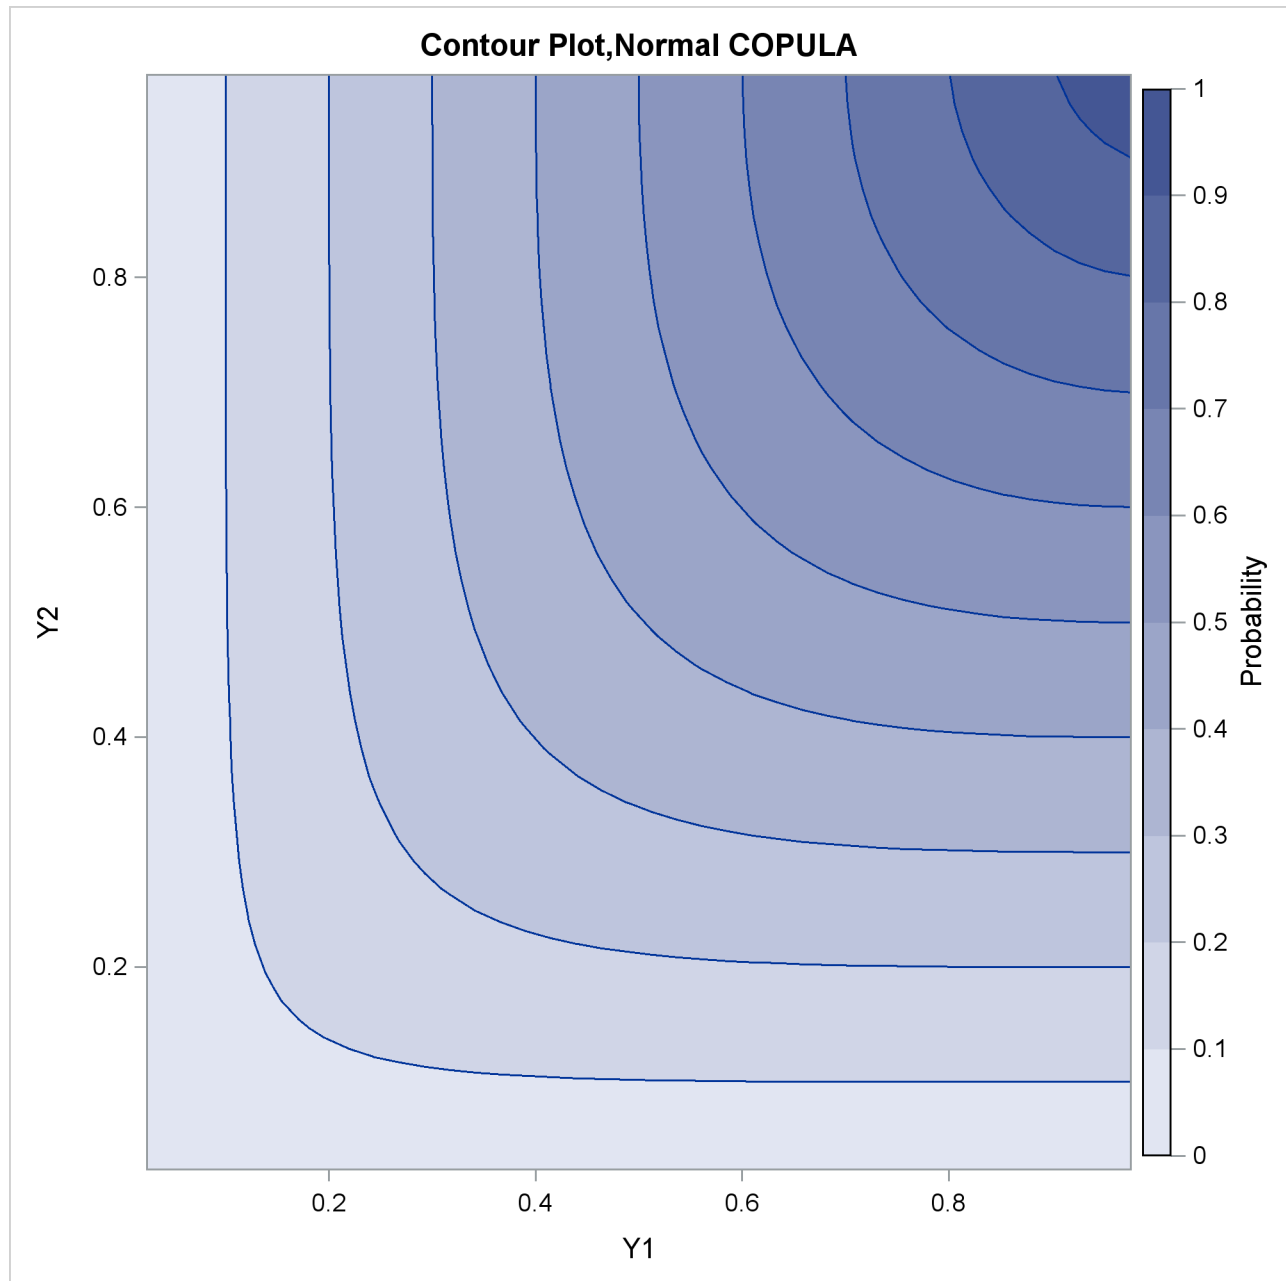
```
/* simulate the data from bivariate normal copula */
proc copula ;
  var Y1-Y2;
  define cop normal (cor=inparm);
  simulate cop /
    ndraws      = 500
    seed        = 1234
    outuniform  = normal_unifdata
    plots       = (data = original matrix
                  distribution = cdf);
run;
```

The graphical output is shown in [Output 10.2.2](#) and in [Output 10.2.3](#).

Output 10.2.2 Simulated Data, Uniform Marginals



[Output 10.2.2](#) shows bivariate scatter plots of the simulated data. Also note that due to the high correlation parameter (0.8), the scatter plots are most dense around the 45 degree line, which indicates high dependence between the two variables.

Output 10.2.3 Joint Cumulative Distribution

Output 10.2.3 shows the theoretical CDF contour plot. If the correlation parameter were set to 0, then knowing copula properties you would expect perfectly parallel straight lines with the slope of -45 degrees. On the other hand, if the parameter were set to 1, you would expect perpendicular lines with corners lying on the diagonal.

The next DATA step transforms the variables from zero-one uniformly distributed to nonnegative exponentially distributed with parameter 0.5. Three indicator variables are added to the data set as well. SURVIVE1 and SURVIVE2 are equal to 1 if a respective company has remained in business for more than three years. SURVIVE is equal to 1 if both companies survived the same period together.

```

/* default time has exponential marginal distribution with parameter 0.5 */
data default;
  set normal_unifdata;
  array arr{2} Y1-Y2;
  array time{2} time1-time2;
  array surv{2} survive1-survive2;
  lambda = 0.5;
  do i=1 to 2;
    time[i] = -log(1-arr[i])/lambda;
    surv[i] = 0;
    if (time[i] >3) then surv[i]=1;
  end;
  survive = 0;
  if (time1 >3) && (time2 >3) then survive = 1;
run;

```

The first analysis step is to look at correlations between survival times of two companies. This step is performed with the following CORR procedure:

```

proc corr data = default plot=matrix kendall;
  var time1 time2;
run;

```

The output of this code is given in [Output 10.2.4](#) and in [Output 10.2.5](#).

[Output 10.2.4](#) shows some descriptive statistics and two measures of correlation: Pearson and Kendall. Both of these measures indicate high and statistically significant dependence between life spans of two companies.

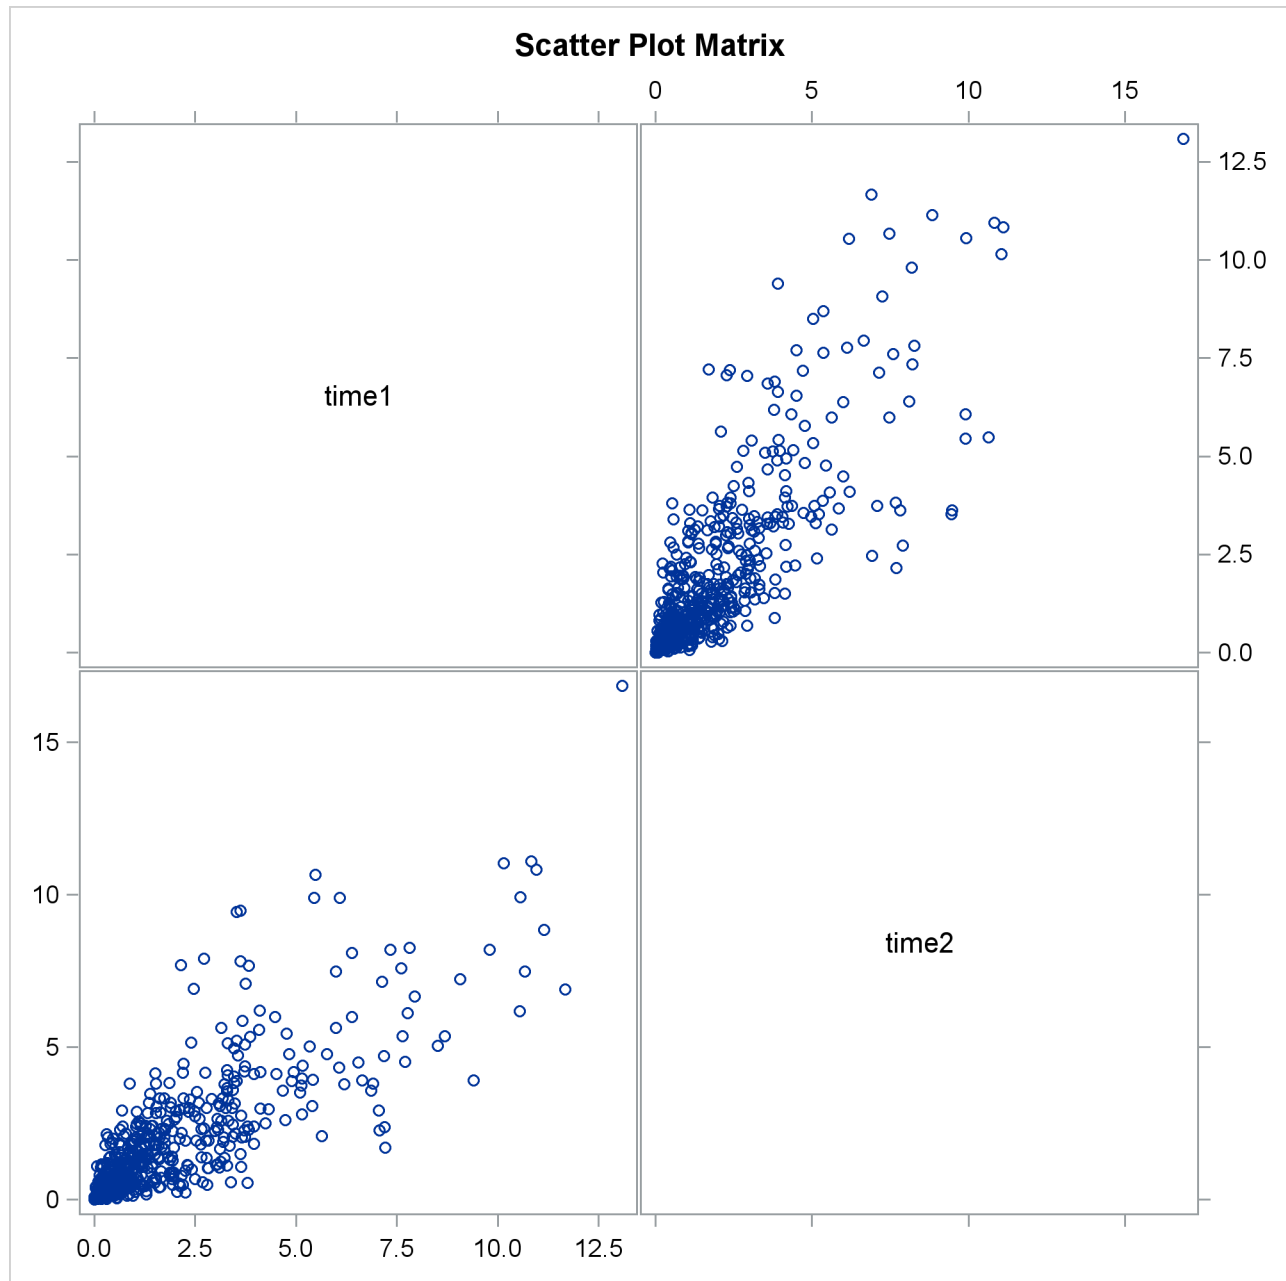
Output 10.2.4 Default Time Descriptive Statistics and Correlations

The CORR Procedure						
2 Variables: time1 time2						
Simple Statistics						
Variable	N	Mean	Std Dev	Median	Minimum	Maximum
time1	500	2.08347	2.23677	1.26496	0.00449	13.08462
time2	500	2.07547	2.19756	1.37603	0.01076	16.85567
Pearson Correlation Coefficients, N = 500						
Prob > r under H0: Rho=0						
		time1	time2			
time1		1.00000	0.80268			
			<.0001			
time2		0.80268	1.00000			
		<.0001				

Output 10.2.4 *continued*

Kendall Tau b Correlation Coefficients, N = 500			
Prob > tau under H0: Tau=0			
	time1	time2	
time1	1.00000	0.59566	
		<.0001	
time2	0.59566	1.00000	
	<.0001		

Output 10.2.5 shows marginal distributions and scatter plots of simulated data. Distributions are noticeably close to exponential and scatter plots show a high degree of dependence.

Output 10.2.5 Default Times

The second and the last step is to empirically estimate the default probabilities of two companies. This is done in the following FREQ procedure:

```
proc freq data=default;
  table survive survive1-survive2;
run;
```

The result is shown in [Output 10.2.6](#).

Output 10.2.6 Probabilities of Default

The FREQ Procedure				
survive	Frequency	Percent	Cumulative Frequency	Cumulative Percent
0	415	83.00	415	83.00
1	85	17.00	500	100.00
survive1	Frequency	Percent	Cumulative Frequency	Cumulative Percent
0	374	74.80	374	74.80
1	126	25.20	500	100.00
survive2	Frequency	Percent	Cumulative Frequency	Cumulative Percent
0	390	78.00	390	78.00
1	110	22.00	500	100.00

[Output 10.2.6](#) shows that the empirical default probabilities are 75% and 78%. Assuming that these companies are independent gives the probability estimate of both companies defaulting during the period of three years as: $0.75 \times 0.78 = 0.59$ (59%). Comparing this naive estimate with the much higher actual 83% joint default probability illustrates that neglecting the correlation between the two companies significantly underestimates the probability of default.

References

- Cherubini, U., Luciano, E., and Vecchiato, W. (2004), *Copula Methods in Finance*, Chichester: John Wiley.
- Devroye, L. (1986), "Non-Uniform Random Variate Generation," New York: Springer-Verlag. <http://cg.scs.carleton.ca/~luc/rnbookindex.html>
- Galiani, S. S. (2003), "Copula Functions and Their Application in Pricing and Risk Managing Multiname Credit Derivative Products," <http://www.defaultrisk.com>
- Genest, C., Ghouli, K., and Rivest, L. P. (1995), "A Semiparametric Estimation Procedure of Dependence Parameters in Multivariate Families of Distributions," *Biometrika*, 82, 543–552.
- Joe, H. and Xu, J. (1996), *The Estimation Method of Inference Functions for Margins for Multivariate Models*, Technical Report No. 166, University of British Columbia.
- Joe, H. (1997), *Multivariate Models and Dependence Concepts*, London: Chapman and Hall.

Marshall, A. W. and I. Olkin (1988), “Families of Multivariate Distributions,” *Journal of the American Statistical Association*, 83, 834–841.

McNeil, A., Frey, R. and Embrechts, P. (2005), *Quantitative Risk Management: Concepts, Techniques, and Tools*, Princeton, NJ: Princeton University Press.

Mendes, B. V. M., de Melo, E. F. L., and Nelson, R. B. (2007), “Robust Fits for Copula Models,” *Communications in Statistics Simulation and Computation*, 36, 997–1008.

Nelson, R.B. (2006), *An Introduction to Copulas*, New York: Springer.

Nolan, J.P. (2010), *Stable Distributions — Models for Heavy Tailed Data*, Boston: Birkhäuser.

Rusechendorf, L. (2009), “On the Distributional Transform, Sklar’s Theorem, and the Empirical Copula Process,” *Journal of Statistical Planning and Inference*, 11, 3921–3927.

Sklar, A. (1959), “Fonctions de Répartition à n Dimensions et Leurs Marges,” *Publications de l’Institut de Statistique de L’Université de Paris*, 8, 229–231.

Wu, F., Valdez, E., and Sherris, M. (2007), “Simulating from Exchangeable Archimedean Copulas,” *Communications in Statistics*, 36, 1019–1034.

Chapter 11

The COUNTREG Procedure

Contents

Overview: COUNTREG Procedure	556
Getting Started: COUNTREG Procedure	557
Syntax: COUNTREG Procedure	559
Functional Summary	560
PROC COUNTREG Statement	561
BOUNDS Statement	563
BY Statement	563
CLASS Statement	564
FREQ Statement	564
INIT Statement	564
MODEL Statement	565
NLOPTIONS Statement	566
OUTPUT Statement	566
RESTRICT Statement	567
WEIGHT Statement	568
ZEROMODEL Statement	568
Details: COUNTREG Procedure	569
Specification of Regressors	569
Missing Values	571
Poisson Regression	572
Negative Binomial Regression	573
Zero-Inflated Count Regression Overview	575
Zero-Inflated Poisson Regression	576
Zero-Inflated Negative Binomial Regression	578
Computational Resources	581
Nonlinear Optimization Options	581
Covariance Matrix Types	582
Displayed Output	582
OUTPUT OUT= Data Set	584
OUTEST= Data Set	584
ODS Table Names	585
Examples: COUNTREG Procedure	585
Example 11.1: Basic Models	585
Example 11.2: ZIP and ZINB Models for Data Exhibiting Extra Zeros	589
References	597

Overview: COUNTREG Procedure

The COUNTREG (count regression) procedure analyzes regression models in which the dependent variable takes nonnegative integer or count values. The dependent variable is usually an *event count*, which refers to the number of times an event occurs. For example, an event count might represent the number of ship accidents per year for a given fleet. In count regression, the conditional mean $E(y_i|\mathbf{x}_i)$ of the dependent variable y_i is assumed to be a function of a vector of covariates \mathbf{x}_i .

The Poisson (log-linear) regression model is the most basic model that explicitly takes into account the nonnegative integer-valued aspect of the outcome. With this model, the probability of an event count is determined by a Poisson distribution, where the conditional mean of the distribution is a function of a vector of covariates. However, the basic Poisson regression model is limited because it forces the conditional mean of the outcome to equal the conditional variance. This assumption is often violated in real-life data. Negative binomial regression is an extension of Poisson regression in which the conditional variance can exceed the conditional mean. Also, an often encountered characteristic of count data is that the number of zeros in the sample exceeds the number of zeros predicted by either the Poisson or negative binomial model. Zero-inflated Poisson (ZIP) and zero-inflated negative binomial (ZINB) models explicitly model the production of zero counts to account for excess zeros and also enable the conditional variance of the outcome to differ from the conditional mean.

Under zero-inflated models, additional zeros occur with probability φ_i , which is determined by a separate model, $\varphi_i = F(\mathbf{z}_i'\boldsymbol{\gamma})$, where F is the normal or logistic distribution function that results in a probit or logistic model and \mathbf{z}_i is a set of covariates.

PROC COUNTREG supports the following models for count data:

- Poisson regression
- negative binomial regression with quadratic (NEGBIN2) and linear (NEGBIN1) variance functions (Cameron and Trivedi 1986)
- zero-inflated Poisson (ZIP) model (Lambert 1992)
- zero-inflated negative binomial (ZINB) model

In recent years, count data models have been used extensively in economics, political science, and sociology. For example, Hausman, Hall, and Griliches (1984) examine the effects of research and development expenditures on the number of patents received by U.S. companies. Cameron and Trivedi (1986) study factors that affect the number of doctor visits. Greene (1994) studies the number of derogatory reports to a credit reporting agency for a group of credit card applicants. As a final example, Long (1997) analyzes the number of doctoral publications in the final three years of Ph.D. studies.

The COUNTREG procedure uses maximum likelihood estimation. When a model with a dependent count variable is estimated using linear ordinary least squares (OLS) regression, the count nature of the dependent variable is ignored. This can lead to negative predicted counts and to parameter estimates with undesirable properties in terms of statistical efficiency, consistency, and unbiasedness unless the mean of the counts is high, in which case the Gaussian approximation and linear regression might be satisfactory.

Getting Started: COUNTREG Procedure

The COUNTREG procedure is similar in use to other regression model procedures in the SAS System. For example, the following statements are used to estimate a Poisson regression model:

```
proc countreg data=one ;
    model y = x / dist=poisson ;
run;
```

The response variable *y* is numeric and has nonnegative integer values. To allow for variance greater than the mean, specify the DIST=NEGBIN option to fit the negative binomial model instead of the Poisson.

The following example illustrates the use of PROC COUNTREG. The data are taken from Long (1997) and can be found in the SAS/ETS Sample Library. This study examines how factors such as gender (*fem*), marital status (*mar*), number of young children (*kid5*), prestige of the graduate program (*phd*), and number of articles published by a scientist's mentor (*ment*) affect the number of articles (*art*) published by the scientist.

The first 10 observations are shown in [Figure 11.1](#).

Figure 11.1 Article Count Data

Obs	art	fem	mar	kid5	phd	ment
1	3	0	1	2	1.38000	8.0000
2	0	0	0	0	4.29000	7.0000
3	4	0	0	0	3.85000	47.0000
4	1	0	1	1	3.59000	19.0000
5	1	0	1	0	1.81000	0.0000
6	1	0	1	1	3.59000	6.0000
7	0	0	1	1	2.12000	10.0000
8	0	0	1	0	4.29000	2.0000
9	3	0	1	2	2.58000	2.0000
10	3	0	1	1	1.80000	4.0000

The following SAS statements estimate the Poisson regression model:

```
proc countreg data=long97data;
    model art = fem mar kid5 phd ment / dist=poisson;
run;
```

The Model Fit Summary, shown in [Figure 11.2](#), lists several details about the model. By default, the COUNTREG procedure uses the Newton-Raphson optimization technique. The maximum log-likelihood value is shown, in addition to two information measures, Akaike's information criterion (AIC) and Schwarz's Bayesian information criterion (SBC), which can be used to compare competing Poisson models. Smaller values of these criteria indicate better models.

Figure 11.2 Estimation Summary Table for a Poisson Regression

The COUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	Poisson
Log Likelihood	-1651
Maximum Absolute Gradient	3.5741E-9
Number of Iterations	5
Optimization Method	Newton-Raphson
AIC	3314
SBC	3343

The parameter estimates of the model and their standard errors are shown in [Figure 11.3](#). All covariates are significant predictors of the number of articles, except for the prestige of the program (phd), which has a p -value of 0.6271.

Figure 11.3 Parameter Estimates of Poisson Regression

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.304617	0.102982	2.96	0.0031
fem	1	-0.224594	0.054614	-4.11	<.0001
mar	1	0.155243	0.061375	2.53	0.0114
kid5	1	-0.184883	0.040127	-4.61	<.0001
phd	1	0.012823	0.026397	0.49	0.6271
ment	1	0.025543	0.002006	12.73	<.0001

The following statements fit the negative binomial model. While the Poisson model requires that the conditional mean and conditional variance be equal, the negative binomial model allows for overdispersion; that is, the conditional variance can exceed the conditional mean.

```
proc countreg data=long97data;
  model art = fem mar kid5 phd ment / dist=negbin(p=2) method=qn;
run;
```

The fit summary is shown in [Figure 11.4](#), and parameter estimates are listed in [Figure 11.5](#).

Figure 11.4 Estimation Summary Table for a Negative Binomial Regression

The COUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	NegBin
Log Likelihood	-1561
Maximum Absolute Gradient	1.75584E-6
Number of Iterations	16
Optimization Method	Quasi-Newton
AIC	3136
SBC	3170

Figure 11.5 Parameter Estimates of Negative Binomial Regression

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.256144	0.138560	1.85	0.0645
fem	1	-0.216418	0.072672	-2.98	0.0029
mar	1	0.150489	0.082106	1.83	0.0668
kid5	1	-0.176415	0.053060	-3.32	0.0009
phd	1	0.015271	0.036040	0.42	0.6718
ment	1	0.029082	0.003470	8.38	<.0001
_Alpha	1	0.441620	0.052967	8.34	<.0001

The parameter estimate for _Alpha of 0.4416 is an estimate of the dispersion parameter in the negative binomial distribution. A t test for the hypothesis $H_0 : \alpha = 0$ is provided. It is highly significant, indicating overdispersion ($p < 0.0001$).

The null hypothesis $H_0 : \alpha = 0$ can be also tested against the alternative $\alpha > 0$ by using the likelihood ratio test, as described by Cameron and Trivedi (1998, pp. 45, 77–78). The likelihood ratio test statistic is equal to $-2(\mathcal{L}_P - \mathcal{L}_{NB}) = -2(-1651 + 1561) = 180$, where \mathcal{L}_P and \mathcal{L}_{NB} are the log likelihoods for the Poisson and negative binomial models, respectively. The likelihood ratio test is highly significant, providing strong evidence of overdispersion.

Syntax: COUNTREG Procedure

The COUNTREG procedure is controlled by the following statements:

```

PROC COUNTREG options ;
  BOUNDS bound1 < , bound2 ... > ;
  BY variables ;
  CLASS variables ;
  FREQ variable ;
  INIT initvalue1 < , initvalue2 ... > ;
  MODEL dependent variable = regressors / options ;
  NLOPTIONS options ;
  OUTPUT options ;
  RESTRICT restriction1 < , restriction2 ... > ;
  WEIGHT variable ;
  ZEROMODEL dependent variable ~ zero-inflated regressors / options ;

```

There can only be one MODEL statement. The ZEROMODEL statement, if used, must appear after the MODEL statement, and the CLASS statement must precede the MODEL statement. If a FREQ or WEIGHT statement is specified more than once, the variable specified in the first instance is used.

Functional Summary

Table 11.1 summarizes statements and options used with the COUNTREG procedure.

Table 11.1 COUNTREG Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	COUNTREG	DATA=
Writes parameter estimates to an output data set	COUNTREG	OUTEST=
Writes estimates of $\mathbf{x}_i' \boldsymbol{\beta}$ and $\mathbf{z}_i' \boldsymbol{\gamma}$ to an output data set	OUTPUT	OUT=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies classification variables	CLASS	
Specifies a frequency variable	FREQ	
Specifies a weight variable	WEIGHT	
Printing Control Options		
Prints the correlation matrix of the estimates	MODEL	CORRB
Prints the covariance matrix of the estimates	MODEL	COVB
Prints a summary iteration listing	MODEL	ITPRINT
Suppresses the normal printed output	COUNTREG	NOPRINT
Requests all printing options	MODEL	PRINTALL
Options to Control the Optimization Process		
Specifies maximum number of iterations allowed	MODEL	MAXITER=
Selects the iterative minimization method to use	COUNTREG	METHOD=

Description	Statement	Option
Sets boundary restrictions on parameters	BOUNDS	
Sets initial values for parameters	INIT	
Sets linear restrictions on parameters	RESTRICT	
Specifies the optimization options	NLOPTIONS	See Chapter 6, “Non-linear Optimization Methods”
Model Estimation Options		
Specifies the type of model	MODEL	DIST=
Specifies the type of model	COUNTREG	DIST=
Specifies the type of covariance matrix	MODEL	COVEST=
Suppresses the intercept parameter	MODEL	NOINT
Specifies the offset variable	MODEL	OFFSET=
Specifies the zero-inflated offset variable	ZEROMODEL	OFFSET=
Specifies the zero-inflated link function	ZEROMODEL	LINK=
Output Control Options		
Includes covariances in the OUTEST= data set	COUNTREG	COVOUT
Outputs the probability of response variable taking the current value	OUTPUT	PROB=
Outputs probabilities for particular response values	OUTPUT	PROBCOUNT()
Outputs expected value of response variable	OUTPUT	PRED=
Outputs estimates of $X\beta = \mathbf{x}_i' \boldsymbol{\beta}$	OUTPUT	XBETA=
Outputs estimates of $Z\gamma = \mathbf{z}_i' \boldsymbol{\gamma}$	OUTPUT	ZGAMMA=
Outputs the probability of response variable taking a zero value as a result of the zero-generating process	OUTPUT	PROBZERO=

PROC COUNTREG Statement

PROC COUNTREG *options* ;

The following options can be used in the PROC COUNTREG statement:

Data Set Options

DATA=*SAS-data-set*

specifies the input SAS data set. If the DATA= option is not specified, PROC COUNTREG uses the most recently created SAS data set.

Output Data Set Options

OUTEST=SAS-data-set

writes the parameter estimates to the specified output data set.

COVOUT

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

Printing Options

NOPRINT

suppresses all printed output.

CORRB

prints the correlation matrix of the parameter estimates. This option can also be specified in the MODEL statement.

COVB

prints the covariance matrix of the parameter estimates. This option can also be specified in the MODEL statement.

Estimation Control Options

COVEST=value

specifies the type of covariance matrix of the parameter estimates. The quasi-maximum-likelihood-estimates are computed with COVEST=QML. The default is COVEST=HESSIAN. The supported covariance types are as follows:

OP	specifies the covariance from the outer product matrix.
HESSIAN	specifies the covariance from the Hessian matrix.
QML	specifies the covariance from the outer product and Hessian matrices.

Options to Control the Optimization Process

PROC COUNTREG uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. All the NLO options are available in the NLOPTIONS statement. For details, see the “[NLOPTIONS Statement](#)” on page 566. In addition, the following option is supported in the PROC COUNTREG statement:

METHOD=value

specifies the iterative minimization method to use. The default is METHOD=NRA.

CONGRA	specifies the conjugate-gradient method.
DBLDOG	specifies the double-dogleg method.

QN	specifies the quasi-Newton method.
NMSIMP	specifies Nelder-Mead simplex method.
NRA	specifies the Newton-Raphson method.
NRRIDG	specifies the Newton-Raphson ridge method.
TR	specifies the trust region method.

BOUNDS Statement

BOUNDS *bound1* < , *bound2* ... > ;

The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the COUNTREG procedure. You can specify any number of BOUNDS statements as follows.

Each *bound* is composed of parameter names, constants, and inequality operators as follows:

item operator item < *operator item* < *operator item* ... > >

Each *item* is a constant, a parameter name, or a list of parameter names. Each *operator* is <, >, <=, or >=. Parameter names are as shown in the ESTIMATE column of the “Parameter Estimates” table or can be seen in the OUTEST= data set.

You can use both the BOUNDS statement and the RESTRICT statement to impose boundary constraints; however, the BOUNDS statement provides a simpler syntax for specifying these kinds of constraints. See also the section “[RESTRICT Statement](#)” on page 567.

The following BOUNDS statement constrains the estimates of the parameter for *z* to be negative, the parameters for *x1* through *x10* to be between zero and one, and the parameter for *x1* in the zero-inflation model to be less than one:

```
bounds z < 0,
       0 < x1-x10 < 1,
       Inf_x1 < 1;
```

BY Statement

BY *variables* ;

A BY statement can be used with PROC COUNTREG to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the input data set should be sorted in the order of the BY variables.

CLASS Statement

CLASS *variables* ;

The CLASS statement names the classification variables that are used to group (classify) data in the analysis. Classification variables can be either character or numeric.

Class levels are determined from the formatted values of the CLASS *variables*. Thus, you can use formats to group values into levels. See the discussion of the FORMAT procedure in the *SAS Language Reference: Dictionary* for details. The CLASS statement must precede the MODEL statement.

FREQ Statement

FREQ *variable* ;

The FREQ statement specifies a variable whose values represent the frequency of occurrence of each observation. PROC COUNTREG treats each observation as if it appears n times, where n is the value of the FREQ variable for the observation. If the frequency value is not an integer, it is truncated to an integer; if it is less than 1 or missing, the observation is not used in the model fitting. When the FREQ statement is not specified, each observation is assigned a frequency of 1. If you specify more than one FREQ statement, then the first statement is used.

INIT Statement

INIT *initvalue1* < , *initvalue2* . . . > ;

The INIT statement sets initial values for parameters in the optimization.

Each *initvalue* is written as a parameter or parameter list, followed by an optional equal sign (=), followed by a number:

parameter < = > *number*

For continuous regressors, the names of the parameters are the same as the corresponding variables. For a regressor that is a CLASS variable, the parameter name combines the corresponding CLASS variable name with the variable level. For interaction and nested regressors, the parameter names combine the names of each regressor. The names of the parameters can be seen in the OUTEST= data set. By default, initial values are determined by OLS regression. Initial values can be displayed with the ITPRINT option in the PROC statement.

MODEL Statement

MODEL *dependent* = <regressors> </ options> ;

The MODEL statement specifies the dependent variable and independent covariates (regressors) for the regression model. If you specify no regressors, PROC COUNTREG fits a model that contains only an intercept. The dependent count variable should take on only nonnegative integer values in the input data set. PROC COUNTREG rounds any positive noninteger count values to the nearest integer. PROC COUNTREG ignores any observations with a negative count.

Only one MODEL statement can be specified. The following options can be used in the MODEL statement after a slash (/).

DIST=*value*

specifies a type of model to be analyzed. If you specify this option in both the MODEL statement and the PROC COUNTREG statement, then only the value in the MODEL statement is used. The following model types are supported:

POISSON | P Poisson regression model

NEGBIN(P=1) negative binomial regression model with a linear variance function

NEGBIN(P=2) | NEGBIN negative binomial regression model with a quadratic variance function

ZIPOISSON | ZIP zero-inflated Poisson regression. The ZEROMODEL statement must be specified when this model type is specified.

ZINEGBIN | ZINB zero-inflated negative binomial regression. The ZEROMODEL statement must be specified when this model type is specified.

NOINT

suppresses the intercept parameter.

OFFSET=*variable*

specifies a variable in the input data set to be used as an offset variable. The offset variable appears as a covariate in the model with its parameter restricted to 1. The offset variable cannot be the response variable, the zero-inflation offset variable (if any), or one of the explanatory variables. The Model Fit Summary gives the name of the data set variable used as the offset variable; it is labeled as “Offset.”

Printing Options

CORRB

prints the correlation matrix of the parameter estimates. The CORRB option can also be specified in the PROC COUNTREG statement.

COVB

prints the covariance matrix of the parameter estimates. The COVB can also be specified in the PROC COUNTREG statement.

ITPRINT

prints the objective function and parameter estimates at each iteration. The objective function is the negative log-likelihood function. The ITPRINT option can also be specified in the PROC COUNTREG statement.

PRINTALL

requests all printing options. The PRINTALL option can also be specified in the PROC COUNTREG statement.

NLOPTIONS Statement

NLOPTIONS < options > ;

The NLOPTIONS statement provides the options to control the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “Nonlinear Optimization Methods.”

OUTPUT Statement

OUTPUT < OUT=SAS-data-set > < output-options > ;

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimates of $\mathbf{x}_i' \boldsymbol{\beta}$, the expected value of the response variable, and the probability that the response variable will take on the current value or other values that you specify. In a zero-inflated model, you can additionally request that the output data set contain the estimates of $\mathbf{z}_i' \boldsymbol{\gamma}$ and the probability that the response is zero as a result of the zero-generating process. Except for the probability of the current value, these statistics can be computed for all observations in which the regressors are not missing, even if the response is missing. By adding observations with missing response values to the input data set, you can compute these statistics for new observations or for settings of the regressors that are not present in the data without affecting the model fit.

You can specify only one OUTPUT statement. You can specify the following OUTPUT statement options:

OUT=SAS-data-set

names the output data set.

XBETA=name

names the variable that contains estimates of $\mathbf{x}_i' \boldsymbol{\beta}$.

PRED=name

names the variable that contains the predicted value of the response variable.

PROB=name

names the variable that contains the probability of the response variable taking the current value, $\Pr(Y = y_i)$.

PROBCOUNT(*value1* <*value2*...>)

outputs the probability of the response variable taking particular values. Each value should be a nonnegative integer. Nonintegers are rounded to the nearest integer. *value* can also be a list of the form X TO Y BY Z. For example, PROBCOUNT(0 1 2 TO 10 BY 2 15) requests predicted probabilities for counts 0, 1, 2, 4, 5, 6, 8, 10, and 15.

ZGAMMA=*name*

names the variable that contains estimates of $\mathbf{z}_i'\boldsymbol{\gamma}$.

PROBZERO=*name*

names the variable that contains the value of φ_i , the probability that the response variable will take on the value of zero as a result of the zero-generating process. It is written to the output file only if the model is zero-inflated. Note that this is not the overall probability of a zero response. That is provided by the PROBCOUNT(0) option.

RESTRICT Statement

RESTRICT *restriction1* <, *restriction2* ... > ;

The RESTRICT statement imposes linear restrictions on the parameter estimates. You can specify any number of RESTRICT statements.

Each *restriction* is written as an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

expression operator expression

The *operator* can be =, <, >, <=, or >=.

Restriction expressions can be composed of parameter names, constants, and the operators times (*), plus (+), and minus (−). The restriction expressions must be a linear function of the parameters. For continuous regressors, the names of the parameters are the same as the corresponding variables. For a regressor that is a CLASS variable, the parameter name combines the corresponding CLASS variable name with the variable level. For interaction and nested regressors, the parameter names combine the names of each regressor. The names of the parameters can be seen in the OUTEST= data set.

Lagrange multipliers are reported in the “Parameter Estimates” table for all the active linear constraints. They are identified with the names Restrict1, Restrict2, and so on. The probabilities of these Lagrange multipliers are computed using a beta distribution (LaMotte 1994). Nonactive (nonbinding) restrictions have no effect on the estimation results and are not noted in the output.

The following RESTRICT statement constrains the negative binomial dispersion parameter α to 1, which restricts the conditional variance to be $\mu + \mu^2$:

```
restrict _Alpha = 1;
```

WEIGHT Statement

WEIGHT *variable* *</option>* ;

The WEIGHT statement specifies a variable to supply weighting values to use for each observation in estimating parameters. The log likelihood for each observation is multiplied by the corresponding weight variable value.

If the weight of an observation is nonpositive, that observation is not used in the estimation.

The following option can be added to the WEIGHT statement after a slash (/).

NONNORMALIZE

does not normalize the weights. By default, the weights are normalized so that they add up to the actual sample size. Weights w_i are normalized by multiplying them by $\frac{n}{\sum_{i=1}^n w_i}$, where n is the sample size. If the weights are required to be used as is, then specify the NONNORMALIZE option.

ZEROMODEL Statement

ZEROMODEL *dependent variable* *~ zero-inflated regressors / options* ;

The ZEROMODEL statement is required if either ZIP or ZINB is specified in the DIST= option in the MODEL statement. If ZIP or ZINB is specified, then the ZEROMODEL statement must follow immediately after the MODEL statement. The dependent variable in the ZEROMODEL statement must be the same as the dependent variable in the MODEL statement.

The zero-inflated (ZI) regressors appear in the equation that determines the probability (φ_i) of a zero count. Each of these q variables has a parameter to be estimated in the regression. For example, let \mathbf{z}'_i be the i th observation's $1 \times (q + 1)$ vector of values of the q ZI explanatory variables (w_0 is set to 1 for the intercept term). Then φ_i is a function of $\mathbf{z}'_i \boldsymbol{\gamma}$, where $\boldsymbol{\gamma}$ is the $(q + 1) \times 1$ vector of parameters to be estimated. (The ZI intercept is γ_0 ; the coefficients for the q ZI covariates are $\gamma_1, \dots, \gamma_q$.) If this option is omitted, then only the intercept term γ_0 is estimated. The “Parameter Estimates” table in the displayed output gives the estimates for the ZI intercept and ZI explanatory variables; they are labeled with the prefix “Inf_”. For example, the ZI intercept is labeled “Inf_intercept”. If you specify Age (a variable in your data set) as a ZI explanatory variable, then the “Parameter Estimates” table labels the corresponding parameter estimate “Inf_Age”.

The following options can be specified in the ZEROMODEL statement following a slash (/):

LINK=value

specifies the distribution function used to compute probability of zeros. The following distribution functions are supported:

LOGISTIC	specifies the logistic distribution.
NORMAL	specifies the standard normal distribution.

If this option is omitted, then the default ZI link function is logistic.

OFFSET=variable

specifies a variable in the input data set to be used as a zero-inflated (ZI) offset variable. The ZI offset variable is included as a term, with coefficient restricted to 1, in the equation that determines the probability (φ_i) of a zero count. The ZI offset variable cannot be the response variable, the offset variable (if any), or one of the explanatory variables. The name of the data set variable used as the ZI offset variable is displayed in the “Model Fit Summary” output, where it is labeled as “Inf_offset”.

Details: COUNTREG Procedure

Specification of Regressors

Each term in a model, called *regressor*, is a variable or combination of variables. Regressors are specified with a special notation that uses variable names and operators. There are two kinds of variables: *classification (CLASS) variables* and *continuous variables*. There are two primary operators: *crossing* and *nesting*. A third operator, the *bar operator*, is used to simplify effect specification.

In the SAS System, *classification (CLASS) variables* are declared in the **CLASS** statement. (They can also be called *categorical, qualitative, discrete, or nominal variables*.) Classification variables can be either *numeric* or *character*. The values of a classification variable are called *levels*. For example, the classification variable Sex has the levels “male” and “female.”

In a model, an independent variable that is not declared in the **CLASS** statement is assumed to be continuous. *Continuous variables*, which must be numeric, are used for covariates. For example, the heights and weights of subjects are continuous variables. A response variable is a *discrete count variable* and must also be numeric.

Types of Regressors

Seven different types of regressors are used in the COUNTREG procedure. In the following list, assume that A, B, C, D, and E are **CLASS** variables and that X1 and X2 are continuous variables:

- Regressors are specified by writing continuous variables by themselves: X1 X2.
- Polynomial regressors are specified by joining (crossing) two or more continuous variables with asterisks: X1*X1 X1*X2.
- Dummy regressors are specified by writing CLASS variables by themselves: A B C.
- Dummy interactions are specified by joining classification variables with asterisks: A*B B*C A*B*C.
- Nested regressors are specified by following a dummy variable or dummy interaction with a classification variable or list of classification variables enclosed in parentheses. The dummy variable or

dummy interaction is nested within the regressor listed in parentheses: $B(A) \quad C(B*A) \quad D*E(C*B*A)$. In this example, $B(A)$ is read “B nested within A.”

- Continuous-by-class regressors are written by joining continuous variables and classification variables with asterisks: $X1*A$.
- Continuous-nesting-class regressors consist of continuous variables followed by a classification variable interaction enclosed in parentheses: $X1(A) \quad X1*X2(A*B)$.

One example of the general form of an effect that involves several variables is

$$X1*X2*A*B*C(D*E)$$

This example contains an interaction of continuous terms with classification terms that are nested within more than one classification variable. The continuous list comes first, followed by the dummy list, followed by the nesting list in parentheses. Note that asterisks can appear within the nested list but not immediately before the left parenthesis.

The **MODEL** statement and several other statements use these effects. Some examples of **MODEL** statements that use various kinds of effects are shown in the following table, where *a*, *b*, and *c* represent classification variables. Variables *x* and *z* are continuous.

Specification	Type of Model
<code>model y=x;</code>	Simple regression
<code>model y=x z;</code>	Multiple regression
<code>model y=x x*x;</code>	Polynomial regression
<code>model y=a;</code>	Regression with one classification variable
<code>model y=a b c;</code>	Regression with multiple classification variables
<code>model y=a b a*b;</code>	Regression with classification variables and their interactions
<code>model y=a b(a) c(b a);</code>	Regression with classification variables and their interactions
<code>model y=a x;</code>	Regression with both continuous and classification variables
<code>model y=a x(a);</code>	Separate-slopes regression
<code>model y=a x x*a;</code>	Homogeneity-of-slopes regression

The Bar Operator

You can shorten the specification of a large factorial model by using the bar operator. For example, two ways of writing the model for a full three-way factorial model follow:

```
model Y = A B C A*B A*C B*C A*B*C;
```

```
model Y = A|B|C;
```

When the bar (|) is used, the right and left sides become effects, and the cross of them becomes an effect. Multiple bars are permitted. The expressions are expanded from left to right, using rules 2–4 given in Searle (1971, p. 390).

- Multiple bars are evaluated from left to right. For instance, A|B|C is evaluated as follows:

$$\begin{aligned}
 A|B|C &\rightarrow \{A|B\}|C \\
 &\rightarrow \{A\ B\ A*B\}|C \\
 &\rightarrow A\ B\ A*B\ C\ A*C\ B*C\ A*B*C
 \end{aligned}$$

- Crossed and nested groups of variables are combined. For example, A(B)|C(D) generates A*C(B D), among other terms.
- Duplicate variables are removed. For example, A(C)|B(C) generates A*B(C C), among other terms, and the extra C is removed.
- Effects are discarded if a variable occurs on both the crossed and nested parts of an effect. For instance, A(B)|B(D E) generates A*B(B D E), but this effect is eliminated immediately.

You can also specify the maximum number of variables involved in any effect that results from bar evaluation by specifying that maximum number, preceded by an @ sign, at the end of the bar effect. For example, the specification A|B|C@2 would result in only those effects that contain two or fewer variables: in this case, A B A*B C A*C and B*C.

More examples of using the | and @ operators follow:

A C(B)	is equivalent to	A C(B) A*C(B)
A(B) C(B)	is equivalent to	A(B) C(B) A*C(B)
A(B) B(D E)	is equivalent to	A(B) B(D E)
A B(A) C	is equivalent to	A B(A) C A*C B*C(A)
A B(A) C@2	is equivalent to	A B(A) C A*C
A B C D@2	is equivalent to	A B A*B C A*C B*C D A*D B*D C*D
A*B(C*D)	is equivalent to	A*B(C D)

Missing Values

Any observation in the input data set with a missing value for one or more of the regressors is ignored by PROC COUNTREG and not used in the model fit. PROC COUNTREG rounds any positive noninteger count values to the nearest integer. PROC COUNTREG ignores any observations with a negative count, a zero or negative weight, or a frequency less than 1.

If there are observations in the input data set with missing response values but with nonmissing regressors, PROC COUNTREG can compute several statistics and store them in an output data set by using the OUTPUT statement. For example, you can request that the output data set contain the estimates of $\mathbf{x}_i' \boldsymbol{\beta}$, the expected value of the response variable, and the probability of the response variable taking on values that you specify. In a zero-inflated model, you can additionally request that the output data set contain the estimates of $\mathbf{z}_i' \boldsymbol{\gamma}$, and the probability that the response is zero as a result of the zero-generating process. The presence of such observations (with missing response values) does not affect the model fit.

Poisson Regression

The most widely used model for count data analysis is Poisson regression. This assumes that y_i , given the vector of covariates \mathbf{x}_i , is independently Poisson-distributed with

$$P(Y_i = y_i | \mathbf{x}_i) = \frac{e^{-\mu_i} \mu_i^{y_i}}{y_i!}, \quad y_i = 0, 1, 2, \dots$$

and the mean parameter (that is, the mean number of events per period) is given by

$$\mu_i = \exp(\mathbf{x}_i' \boldsymbol{\beta})$$

where $\boldsymbol{\beta}$ is a $(k + 1) \times 1$ parameter vector. (The intercept is β_0 ; the coefficients for the k regressors are β_1, \dots, β_k .) Taking the exponential of $\mathbf{x}_i' \boldsymbol{\beta}$ ensures that the mean parameter μ_i is nonnegative. It can be shown that the conditional mean is given by

$$E(y_i | \mathbf{x}_i) = \mu_i = \exp(\mathbf{x}_i' \boldsymbol{\beta})$$

The name *log-linear model* is also used for the Poisson regression model since the logarithm of the conditional mean is linear in the parameters:

$$\ln[E(y_i | \mathbf{x}_i)] = \ln(\mu_i) = \mathbf{x}_i' \boldsymbol{\beta}$$

Note that the conditional variance of the count random variable is equal to the conditional mean in the Poisson regression model:

$$V(y_i | \mathbf{x}_i) = E(y_i | \mathbf{x}_i) = \mu_i$$

The equality of the conditional mean and variance of y_i is known as *equidispersion*.

The marginal effect of a regressor is given by

$$\frac{\partial E(y_i | \mathbf{x}_i)}{\partial x_{ji}} = \exp(\mathbf{x}_i' \boldsymbol{\beta}) \beta_j = E(y_i | \mathbf{x}_i) \beta_j$$

Thus, a one-unit change in the j th regressor leads to a *proportional* change in the conditional mean $E(y_i | \mathbf{x}_i)$ of β_j .

The standard estimator for the Poisson model is the maximum likelihood estimator (MLE). Since the observations are independent, the log-likelihood function is written as

$$\mathcal{L} = \sum_{i=1}^N w_i (-\mu_i + y_i \ln \mu_i - \ln y_i!) = \sum_{i=1}^N w_i (-e^{\mathbf{x}_i' \boldsymbol{\beta}} + y_i \mathbf{x}_i' \boldsymbol{\beta} - \ln y_i!)$$

where w_i is defined as follows:

- | | |
|-------|---|
| 1 | if neither the WEIGHT nor the FREQ statement is used. |
| W_i | where W_i are the nonnormalized values of the variable specified in the WEIGHT statement in which the NONNORMALIZE option is specified. |

$\frac{\sum_{i=1}^n W_i}{\sum_{i=1}^n F_i W_i}$	where W_i are the nonnormalized values of the variable specified in the WEIGHT statement.
F_i	where F_i are the values of the variable specified in the FREQ statement.
$W_i F_i$	if both the WEIGHT statement, without the NONNORMALIZE option, and the FREQ statement are specified.
$\frac{\sum_{i=1}^n F_i}{\sum_{i=1}^n F_i W_i} W_i F_i$	if both the FREQ and the WEIGHT statements are specified.

The gradient and the Hessian are, respectively,

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i (y_i - \mu_i) \mathbf{x}_i = \sum_{i=1}^N w_i (y_i - e^{\mathbf{x}_i' \boldsymbol{\beta}}) \mathbf{x}_i$$

$$\frac{\partial^2 \mathcal{L}}{\partial \boldsymbol{\beta} \partial \boldsymbol{\beta}'} = - \sum_{i=1}^N w_i \mu_i \mathbf{x}_i \mathbf{x}_i' = - \sum_{i=1}^N w_i e^{\mathbf{x}_i' \boldsymbol{\beta}} \mathbf{x}_i \mathbf{x}_i'$$

The Poisson model has been criticized for its restrictive property that the conditional variance equals the conditional mean. Real-life data are often characterized by *overdispersion* (that is, the variance exceeds the mean). Allowing for overdispersion can improve model predictions since the Poisson restriction of equal mean and variance results in the underprediction of zeros when overdispersion exists. The most commonly used model that accounts for overdispersion is the negative binomial model.

Negative Binomial Regression

The Poisson regression model can be generalized by introducing an unobserved heterogeneity term for observation i . Thus, the individuals are assumed to differ randomly in a manner that is not fully accounted for by the observed covariates. This is formulated as

$$E(y_i | \mathbf{x}_i, \tau_i) = \mu_i \tau_i = e^{\mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i}$$

where the unobserved heterogeneity term $\tau_i = e^{\epsilon_i}$ is independent of the vector of regressors \mathbf{x}_i . Then the distribution of y_i conditional on \mathbf{x}_i and τ_i is Poisson with conditional mean and conditional variance $\mu_i \tau_i$:

$$f(y_i | \mathbf{x}_i, \tau_i) = \frac{\exp(-\mu_i \tau_i) (\mu_i \tau_i)^{y_i}}{y_i!}$$

Let $g(\tau_i)$ be the probability density function of τ_i . Then, the distribution $f(y_i | \mathbf{x}_i)$ (no longer conditional on τ_i) is obtained by integrating $f(y_i | \mathbf{x}_i, \tau_i)$ with respect to τ_i :

$$f(y_i | \mathbf{x}_i) = \int_0^\infty f(y_i | \mathbf{x}_i, \tau_i) g(\tau_i) d\tau_i$$

An analytical solution to this integral exists when τ_i is assumed to follow a gamma distribution. This solution is the negative binomial distribution. When the model contains a constant term, it is necessary to

assume that $E(e^{\epsilon_i}) = E(\tau_i) = 1$, in order to identify the mean of the distribution. Thus, it is assumed that τ_i follows a $\text{gamma}(\theta, \theta)$ distribution with $E(\tau_i) = 1$ and $V(\tau_i) = 1/\theta$,

$$g(\tau_i) = \frac{\theta^\theta}{\Gamma(\theta)} \tau_i^{\theta-1} \exp(-\theta \tau_i)$$

where $\Gamma(x) = \int_0^\infty z^{x-1} \exp(-z) dz$ is the gamma function and θ is a positive parameter. Then, the density of y_i given \mathbf{x}_i is derived as

$$\begin{aligned} f(y_i|\mathbf{x}_i) &= \int_0^\infty f(y_i|\mathbf{x}_i, \tau_i) g(\tau_i) d\tau_i \\ &= \frac{\theta^\theta \mu_i^{y_i}}{y_i! \Gamma(\theta)} \int_0^\infty e^{-(\mu_i + \theta)\tau_i} \tau_i^{\theta+y_i-1} d\tau_i \\ &= \frac{\theta^\theta \mu_i^{y_i} \Gamma(y_i + \theta)}{y_i! \Gamma(\theta) (\theta + \mu_i)^{\theta+y_i}} \\ &= \frac{\Gamma(y_i + \theta)}{y_i! \Gamma(\theta)} \left(\frac{\theta}{\theta + \mu_i} \right)^\theta \left(\frac{\mu_i}{\theta + \mu_i} \right)^{y_i} \end{aligned}$$

Making the substitution $\alpha = \frac{1}{\theta}$ ($\alpha > 0$), the negative binomial distribution can then be rewritten as

$$f(y_i|\mathbf{x}_i) = \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}, \quad y_i = 0, 1, 2, \dots$$

Thus, the negative binomial distribution is derived as a gamma mixture of Poisson random variables. It has conditional mean

$$E(y_i|\mathbf{x}_i) = \mu_i = e^{\mathbf{x}_i' \boldsymbol{\beta}}$$

and conditional variance

$$V(y_i|\mathbf{x}_i) = \mu_i \left[1 + \frac{1}{\theta} \mu_i \right] = \mu_i [1 + \alpha \mu_i] > E(y_i|\mathbf{x}_i)$$

The conditional variance of the negative binomial distribution exceeds the conditional mean. Overdispersion results from neglected unobserved heterogeneity. The negative binomial model with variance function $V(y_i|\mathbf{x}_i) = \mu_i + \alpha \mu_i^2$, which is quadratic in the mean, is referred to as the NEGBIN2 model (Cameron and Trivedi 1986). To estimate this model, specify `DIST=NEGBIN(p=2)` in the `MODEL` statement. The Poisson distribution is a special case of the negative binomial distribution where $\alpha = 0$. A test of the Poisson distribution can be carried out by testing the hypothesis that $\alpha = \frac{1}{\theta_i} = 0$. A Wald test of this hypothesis is provided (it is the reported t statistic for the estimated α in the negative binomial model).

The log-likelihood function of the negative binomial regression model (NEGBIN2) is given by

$$\begin{aligned} \mathcal{L} &= \sum_{i=1}^N w_i \left\{ \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1}) - \ln(y_i!) \right. \\ &\quad \left. - (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})) + y_i \ln(\alpha) + y_i \mathbf{x}_i' \boldsymbol{\beta} \right\} \end{aligned}$$

$$\Gamma(y+a)/\Gamma(a) = \prod_{j=0}^{y-1} (j+a)$$

if y is an integer. See “[Poisson Regression](#)” on page 572 for the definition of w_i .

The gradient is

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i \frac{y_i - \mu_i}{1 + \alpha \mu_i} \mathbf{x}_i$$

and

$$\frac{\partial \mathcal{L}}{\partial \alpha} = \sum_{i=1}^N w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \mu_i) + \frac{y_i - \mu_i}{\alpha(1 + \alpha \mu_i)} \right\}$$

Cameron and Trivedi (1986) consider a general class of negative binomial models with mean μ_i and variance function $\mu_i + \alpha \mu_i^p$. The NEGBIN2 model, with $p = 2$, is the standard formulation of the negative binomial model. Models with other values of p , $-\infty < p < \infty$, have the same density $f(y_i | \mathbf{x}_i)$ except that α^{-1} is replaced everywhere by $\alpha^{-1} \mu_i^{2-p}$. The negative binomial model NEGBIN1, which sets $p = 1$, has variance function $V(y_i | \mathbf{x}_i) = \mu_i + \alpha \mu_i$, which is linear in the mean. To estimate this model, specify `DIST=NEGBIN(p=1)` in the `MODEL` statement.

The log-likelihood function of the NEGBIN1 regression model is given by

$$\begin{aligned} \mathcal{L} = & \sum_{i=1}^N w_i \left\{ \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1} \exp(\mathbf{x}_i' \boldsymbol{\beta})) \right. \\ & \left. - \ln(y_i!) - (y_i + \alpha^{-1} \exp(\mathbf{x}_i' \boldsymbol{\beta})) \ln(1 + \alpha) + y_i \ln(\alpha) \right\} \end{aligned}$$

See “[Poisson Regression](#)” on page 572 for the definition of w_i .

The gradient is

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i \left\{ \left(\sum_{j=0}^{y_i-1} \frac{\mu_i}{(j\alpha + \mu_i)} \right) \mathbf{x}_i - \alpha^{-1} \ln(1 + \alpha) \mu_i \mathbf{x}_i \right\}$$

and

$$\frac{\partial \mathcal{L}}{\partial \alpha} = \sum_{i=1}^N w_i \left\{ - \left(\sum_{j=0}^{y_i-1} \frac{\alpha^{-1} \mu_i}{(j\alpha + \mu_i)} \right) - \alpha^{-2} \mu_i \ln(1 + \alpha) - \frac{(y_i + \alpha^{-1} \mu_i)}{1 + \alpha} + \frac{y_i}{\alpha} \right\}$$

Zero-Inflated Count Regression Overview

The main motivation for zero-inflated count models is that real-life data frequently display overdispersion and excess zeros. Zero-inflated count models provide a way of modeling the excess zeros in addition to

allowing for overdispersion. In particular, for each observation, there are two possible data generation processes. The result of a Bernoulli trial is used to determine which of the two processes is used. For observation i , Process 1 is chosen with probability φ_i and Process 2 with probability $1 - \varphi_i$. Process 1 generates only zero counts. Process 2 generates counts from either a Poisson or a negative binomial model. In general,

$$y_i \sim \begin{cases} 0 & \text{with probability } \varphi_i \\ g(y_i) & \text{with probability } 1 - \varphi_i \end{cases}$$

Therefore, the probability of $\{Y_i = y_i\}$ can be described as

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i) &= \varphi_i + (1 - \varphi_i)g(0) \\ P(y_i | \mathbf{x}_i) &= (1 - \varphi_i)g(y_i), \quad y_i > 0 \end{aligned}$$

where $g(y_i)$ follows either the Poisson or the negative binomial distribution. You can specify the probability φ with the `PROBZERO=` option in the `OUTPUT` statement.

When the probability φ_i depends on the characteristics of observation i , φ_i is written as a function of $\mathbf{z}'_i \boldsymbol{\gamma}$, where \mathbf{z}'_i is the $1 \times (q + 1)$ vector of zero-inflation covariates and $\boldsymbol{\gamma}$ is the $(q + 1) \times 1$ vector of zero-inflation coefficients to be estimated. (The zero-inflation intercept is γ_0 ; the coefficients for the q zero-inflation covariates are $\gamma_1, \dots, \gamma_q$.) The function F that relates the product $\mathbf{z}'_i \boldsymbol{\gamma}$ (which is a scalar) to the probability φ_i is called the zero-inflation link function,

$$\varphi_i = F_i = F(\mathbf{z}'_i \boldsymbol{\gamma})$$

In the COUNTREG procedure, the zero-inflation covariates are indicated in the `ZEROMODEL` statement. Furthermore, the zero-inflation link function F can be specified as either the logistic function,

$$F(\mathbf{z}'_i \boldsymbol{\gamma}) = \Lambda(\mathbf{z}'_i \boldsymbol{\gamma}) = \frac{\exp(\mathbf{z}'_i \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}'_i \boldsymbol{\gamma})}$$

or the standard normal cumulative distribution function (also called the probit function),

$$F(\mathbf{z}'_i \boldsymbol{\gamma}) = \Phi(\mathbf{z}'_i \boldsymbol{\gamma}) = \int_0^{\mathbf{z}'_i \boldsymbol{\gamma}} \frac{1}{\sqrt{2\pi}} \exp(-u^2/2) du$$

The zero-inflation link function is indicated in the `LINK` option in `ZEROMODEL` statement. The default ZI link function is the logistic function.

Zero-Inflated Poisson Regression

In the zero-inflated Poisson (ZIP) regression model, the data generation process referred to earlier as Process 2 is

$$g(y_i) = \frac{\exp(-\mu_i) \mu_i^{y_i}}{y_i!}$$

where $\mu_i = e^{\mathbf{x}_i' \boldsymbol{\beta}}$. Thus the ZIP model is defined as

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i, \mathbf{z}_i) &= F_i + (1 - F_i) \exp(-\mu_i) \\ P(y_i | \mathbf{x}_i, \mathbf{z}_i) &= (1 - F_i) \frac{\exp(-\mu_i) \mu_i^{y_i}}{y_i!}, \quad y_i > 0 \end{aligned}$$

The conditional expectation and conditional variance of y_i are given by

$$\begin{aligned} E(y_i | \mathbf{x}_i, \mathbf{z}_i) &= \mu_i (1 - F_i) \\ V(y_i | \mathbf{x}_i, \mathbf{z}_i) &= E(y_i | \mathbf{x}_i, \mathbf{z}_i) (1 + \mu_i F_i) \end{aligned}$$

Note that the ZIP model (as well as the ZINB model) exhibits overdispersion since $V(y_i | \mathbf{x}_i, \mathbf{z}_i) > E(y_i | \mathbf{x}_i, \mathbf{z}_i)$.

In general, the log-likelihood function of the ZIP model is

$$\mathcal{L} = \sum_{i=1}^N w_i \ln [P(y_i | \mathbf{x}_i, \mathbf{z}_i)]$$

After a specific link function (either logistic or standard normal) for the probability φ_i is chosen, it is possible to write the exact expressions for the log-likelihood function and the gradient.

ZIP Model with Logistic Link Function

First, consider the ZIP model in which the probability φ_i is expressed with a logistic link function—namely,

$$\varphi_i = \frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})}$$

The log-likelihood function is

$$\begin{aligned} \mathcal{L} &= \sum_{\{i: y_i=0\}} w_i \ln [\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))] \\ &\quad + \sum_{\{i: y_i>0\}} w_i \left[y_i \mathbf{x}_i' \boldsymbol{\beta} - \exp(\mathbf{x}_i' \boldsymbol{\beta}) - \sum_{k=2}^{y_i} \ln(k) \right] \\ &\quad - \sum_{i=1}^N w_i \ln [1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})] \end{aligned}$$

See “[Poisson Regression](#)” on page 572 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} &= \sum_{\{i: y_i=0\}} w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \right] \mathbf{z}_i - \sum_{i=1}^N w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})} \right] \mathbf{z}_i \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{\{i: y_i=0\}} w_i \left[\frac{-\exp(\mathbf{x}_i' \boldsymbol{\beta}) \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \right] \mathbf{x}_i + \sum_{\{i: y_i>0\}} w_i [y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})] \mathbf{x}_i \end{aligned}$$

ZIP Model with Standard Normal Link Function

Next, consider the ZIP model in which the probability φ_i is expressed with a standard normal link function: $\varphi_i = \Phi(\mathbf{z}_i' \boldsymbol{\gamma})$. The log-likelihood function is

$$\begin{aligned} \mathcal{L} &= \sum_{\{i: y_i=0\}} w_i \ln \{ \Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta})) \} \\ &+ \sum_{\{i: y_i>0\}} w_i \left\{ \ln [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] - \exp(\mathbf{x}_i' \boldsymbol{\beta}) + y_i \mathbf{x}_i' \boldsymbol{\beta} - \sum_{k=2}^{y_i} \ln(k) \right\} \end{aligned}$$

See “[Poisson Regression](#)” on page 572 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} &= \sum_{\{i: y_i=0\}} w_i \frac{\varphi(\mathbf{z}_i' \boldsymbol{\gamma}) [1 - \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))]}{\Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \mathbf{z}_i \\ &- \sum_{\{i: y_i>0\}} w_i \frac{\varphi(\mathbf{z}_i' \boldsymbol{\gamma})}{[1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})]} \mathbf{z}_i \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{\{i: y_i=0\}} w_i \frac{-[1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(\mathbf{x}_i' \boldsymbol{\beta}) \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))}{\Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \mathbf{x}_i \\ &+ \sum_{\{i: y_i>0\}} w_i [y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})] \mathbf{x}_i \end{aligned}$$

Zero-Inflated Negative Binomial Regression

The zero-inflated negative binomial (ZINB) model in PROC COUNTREG is based on the negative binomial model with quadratic variance function ($p=2$). The ZINB model is obtained by specifying a negative binomial distribution for the data generation process referred to earlier as Process 2:

$$g(y_i) = \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}$$

Thus the ZINB model is defined to be

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i, \mathbf{z}_i) &= F_i + (1 - F_i) (1 + \alpha \mu_i)^{-\alpha^{-1}} \\ P(y_i | \mathbf{x}_i, \mathbf{z}_i) &= (1 - F_i) \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \\ &\times \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}, \quad y_i > 0 \end{aligned}$$

In this case, the conditional expectation and conditional variance of y_i are

$$E(y_i | \mathbf{x}_i, \mathbf{z}_i) = \mu_i (1 - F_i)$$

$$V(y_i | \mathbf{x}_i, \mathbf{z}_i) = E(y_i | \mathbf{x}_i, \mathbf{z}_i) [1 + \mu_i (F_i + \alpha)]$$

As with the ZIP model, the ZINB model exhibits overdispersion because the conditional variance exceeds the conditional mean.

ZINB Model with Logistic Link Function

In this model, the probability φ_i is given by the logistic function—namely,

$$\varphi_i = \frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})}$$

The log-likelihood function is

$$\begin{aligned} \mathcal{L} = & \sum_{\{i: y_i=0\}} w_i \ln \left[\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}} \right] \\ & + \sum_{\{i: y_i>0\}} w_i \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1}) \\ & + \sum_{\{i: y_i>0\}} w_i \{ -\ln(y_i!) - (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})) + y_i \ln(\alpha) + y_i \mathbf{x}_i' \boldsymbol{\beta} \} \\ & - \sum_{i=1}^N w_i \ln [1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})] \end{aligned}$$

See “[Poisson Regression](#)” on page 572 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} = & \sum_{\{i: y_i=0\}} w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{z}_i \\ & - \sum_{i=1}^N w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})} \right] \mathbf{z}_i \\ \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = & \sum_{\{i: y_i=0\}} w_i \left[\frac{-\exp(\mathbf{x}_i' \boldsymbol{\beta})(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}-1}}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{x}_i \\ & + \sum_{\{i: y_i>0\}} w_i \left[\frac{y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})}{1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})} \right] \mathbf{x}_i \end{aligned}$$

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \alpha} = & \sum_{\{i:y_i=0\}} w_i \frac{\alpha^{-2} [(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) - \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})]}{\exp(\mathbf{z}'_i \boldsymbol{\gamma}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{(1+\alpha)/\alpha} + (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \\ & + \sum_{\{i:y_i>0\}} w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) + \frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{\alpha(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \right\} \end{aligned}$$

ZINB Model with Standard Normal Link Function

For this model, the probability φ_i is specified with the standard normal distribution function (probit function): $\varphi_i = \Phi(\mathbf{z}'_i \boldsymbol{\gamma})$. The log-likelihood function is

$$\begin{aligned} \mathcal{L} = & \sum_{\{i:y_i=0\}} w_i \ln \left\{ \Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}} \right\} \\ & + \sum_{\{i:y_i>0\}} w_i \ln [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \\ & + \sum_{\{i:y_i>0\}} w_i \sum_{j=0}^{y_i-1} \{\ln(j + \alpha^{-1})\} \\ & - \sum_{\{i:y_i>0\}} w_i \ln(y_i!) \\ & - \sum_{\{i:y_i>0\}} w_i (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \\ & + \sum_{\{i:y_i>0\}} w_i y_i \ln(\alpha) \\ & + \sum_{\{i:y_i>0\}} w_i y_i \mathbf{x}'_i \boldsymbol{\beta} \end{aligned}$$

See “Poisson Regression” on page 572 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} = & \sum_{\{i:y_i=0\}} w_i \left[\frac{\varphi(\mathbf{z}'_i \boldsymbol{\gamma}) [1 - (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}]}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{z}_i \\ & - \sum_{\{i:y_i>0\}} w_i \left[\frac{\varphi(\mathbf{z}'_i \boldsymbol{\gamma})}{1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})} \right] \mathbf{z}_i \\ \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = & \sum_{\{i:y_i=0\}} w_i \frac{-[1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \exp(\mathbf{x}'_i \boldsymbol{\beta}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-(1+\alpha)/\alpha}}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}} \mathbf{x}_i \end{aligned}$$

$$\begin{aligned}
& + \sum_{\{i:y_i>0\}} w_i \left[\frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})} \right] \mathbf{x}_i \\
\\
\frac{\partial \mathcal{L}}{\partial \alpha} = & \sum_{\{i:y_i=0\}} w_i \frac{[1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \alpha^{-2} [(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) - \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})]}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{(1+\alpha)/\alpha} + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \\
& + \sum_{\{i:y_i>0\}} w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) + \frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{\alpha(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \right\}
\end{aligned}$$

Computational Resources

The time and memory required by PROC COUNTREG are proportional to the number of parameters in the model and the number of observations in the data set being analyzed. Less time and memory are required for smaller models and fewer observations. Also affecting these resources are the method chosen to calculate the variance-covariance matrix and the optimization method. All optimization methods available through the METHOD= option have similar memory use requirements.

The processing time might differ for each method depending on the number of iterations and functional calls needed. The data set is read into memory to save processing time. If not enough memory is available to hold the data, the COUNTREG procedure stores the data in a utility file on disk and rereads the data as needed from this file. When this occurs, the execution time of the procedure increases substantially. The gradient and the variance-covariance matrix must be held in memory. If the model has p parameters including the intercept, then at least $8 * (p + p * (p + 1)/2)$ bytes are needed. If the quasi-maximum likelihood method is used to estimate the variance-covariance matrix (COVEST=QML), an additional $8 * p * (p + 1)/2$ bytes of memory are needed.

Time is also a function of the number of iterations needed to converge to a solution for the model parameters. The number of iterations needed cannot be known in advance. The MAXITER= option can be used to limit the number of iterations that PROC COUNTREG does. The convergence criteria can be altered by nonlinear optimization options available in the PROC COUNTREG statement. For a list of all the nonlinear optimization options, see Chapter 6, “Nonlinear Optimization Methods.”

Nonlinear Optimization Options

PROC COUNTREG uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. In the PROC COUNTREG statement, you can specify nonlinear optimization options that are then passed to the NLO subsystem. For a list of all the nonlinear optimization options, see Chapter 6, “Nonlinear Optimization Methods.”

Covariance Matrix Types

The COUNTREG procedure enables you to specify the estimation method for the covariance matrix. The COVEST=HESSIAN option estimates the covariance matrix based on the inverse of the Hessian matrix, COVEST=OP uses the outer product of gradients, and COVEST=QML produces the covariance matrix based on both the Hessian and outer product matrices. The default is COVEST=HESSIAN.

While all three methods produce asymptotically equivalent results, they differ in computational intensity and produce results that might differ in finite samples. The COVEST=OP option provides the covariance matrix that is typically the easiest to compute. In some cases, the OP approximation is considered more efficient than the Hessian or QML approximations because it contains fewer random elements. The QML approximation is computationally the most complex because both the outer product of gradients and the Hessian matrix are required. In most cases, OP or Hessian approximations are preferred to QML. The need to use QML approximation arises in some cases when the model is misspecified and the information matrix equality does not hold.

Displayed Output

PROC COUNTREG produces the following displayed output.

Iteration History for Parameter Estimates

If you specify the ITPRINT or PRINTALL options in the PROC COUNTREG statement, PROC COUNTREG displays a table that contains the following information for each iteration. Note that some information is specific to the model-fitting procedure chosen (for example, Newton-Raphson, trust region, quasi-Newton).

- iteration number
- number of restarts since the fitting began
- number of function calls
- number of active constraints at the current solution
- value of the objective function (-1 times the log-likelihood value) at the current solution
- change in the objective function from previous iteration
- value of the maximum absolute gradient element
- step size (for Newton-Raphson and quasi-Newton methods)
- slope of the current search direction (for Newton-Raphson and quasi-Newton methods)
- lambda (for trust region method)
- radius value at current iteration (for trust region method)

Model Fit Summary

The “Model Fit Summary” table contains the following information:

- dependent (count) variable name
- number of observations used
- number of missing values in data set, if any
- data set name
- type of model that was fit
- offset variable name, if any
- zero-inflated link function, if any
- zero-inflated offset variable name, if any
- log-likelihood value at solution
- maximum absolute gradient at solution
- number of iterations
- AIC value at solution (a smaller value indicates better fit)
- SBC value at solution (a smaller value indicates better fit)

Under the “Model Fit Summary” is a statement about whether the algorithm successfully converged.

Parameter Estimates

The “Parameter Estimates” table gives the estimates of the model parameters. In zero-inflated (ZI) models, estimates are also given for the ZI intercept and ZI regressor parameters labeled with the prefix “Inf_”. For example, the ZI intercept is labeled “Inf_intercept”. If you specify “Age” as a ZI regressor, then the “Parameter Estimates” table labels the corresponding parameter estimate “Inf_Age”. If you do not list any ZI regressors, then only the ZI intercept term is estimated.

“_Alpha” is the negative binomial dispersion parameter. The t statistic given for “_Alpha” is a test of overdispersion.

Last Evaluation of the Gradient

If you specify the model option ITPRINT, the COUNTREG procedure displays the last evaluation of the gradient vector.

Covariance of Parameter Estimates

If you specify the COVB option in the MODEL statement or in the PROC COUNTREG statement, the COUNTREG procedure displays the estimated covariance matrix, defined as the inverse of the information matrix at the final iteration.

Correlation of Parameter Estimates

If you specify the CORRB option in the MODEL statement or in the PROC COUNTREG statement, PROC COUNTREG displays the estimated correlation matrix. It is based on the Hessian matrix used at the final iteration.

OUTPUT OUT= Data Set

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimates of $\mathbf{x}'_i\boldsymbol{\beta}$, the expected value of the response variable, and the probability of the response variable taking on the current value or other values that you specify. In a zero-inflated model you can additionally request that the output data set contain the estimates of $\mathbf{z}'_i\boldsymbol{\gamma}$, and the probability that the response is zero as a result of the zero-generating process.

Except for the probability of the current value, these statistics can be computed for all observations in which the regressors are not missing, even if the response is missing. By adding observations with missing response values to the input data set, you can compute these statistics for new observations or for settings of the regressors not present in the data without affecting the model fit.

OUTEST= Data Set

The OUTEST= data set is made up of one row (with _TYPE_='PARM') that contains each of the parameter estimates in the model. The second row (with _TYPE_='STD') contains the standard errors for the parameter estimates in the model.

If you use the COVOUT option in the PROC COUNTREG statement, the OUTEST= data set also contains the covariance matrix for the parameter estimates. The covariance matrix appears in the observations with _TYPE_='COV', and the _NAME_ variable labels the rows with the parameter names.

The names of the parameters are used as variable names. These are the same names as used in the INIT, BOUNDS, and RESTRICT statements.

ODS Table Names

PROC COUNTREG assigns a name to each table it creates. You can use these names to denote the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in Table 11.2.

Table 11.2 ODS Tables Produced in PROC COUNTREG

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ClassLevels	Class levels	Default
FitSummary	Summary of nonlinear estimation	Default
ConvergenceStatus	Convergence status	Default
ParameterEstimates	Parameter estimates	Default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlation of parameter estimates	CORRB
InputOptions	Input options	ITPRINT
IterStart	Optimization start	ITPRINT
IterHist	Iteration history	ITPRINT
IterStop	Optimization results	ITPRINT
ParameterEstimatesResults	Parameter estimates	ITPRINT
ParameterEstimatesStart	Parameter estimates	ITPRINT
ProblemDescription	Problem description	ITPRINT

Examples: COUNTREG Procedure

Example 11.1: Basic Models

Data Description and Objective

The data set docvisit contains information for approximately 5,000 Australian individuals about the number and possible determinants of doctor visits that were made during a two-week interval. This data set contains a subset of variables taken from the Racd3 data set used by Cameron and Trivedi (1998). The docvisit data set can be found in the SAS/ETS Sample Library.

The variable doctorco represents doctor visits. Additional variables in the data set that you want to evaluate as determinants of doctor visits include **sex** (coded 0=male, 1=female), **age** (age in years divided by 100), **illness** (number of illnesses during the two-week interval, with five or more coded as five), **income** (annual

income in Australian dollars divided by 1,000), and hscore (a general health questionnaire score, where a high score indicates bad health). Summary statistics for these variables are computed in the following statements and presented in [Output 11.1.1](#).

```
proc means data=docvisit;
  var doctorco sex age illness income hscore;
run;
```

Output 11.1.1 Summary Statistics

The MEANS Procedure					
Variable	N	Mean	Std Dev	Minimum	Maximum
doctorco	5190	0.3017341	0.7981338	0	9.0000000
sex	5190	0.5206166	0.4996229	0	1.0000000
age	5190	0.4063854	0.2047818	0.1900000	0.7200000
illness	5190	1.4319846	1.3841524	0	5.0000000
income	5190	0.5831599	0.3689067	0	1.5000000
hscore	5190	1.2175337	2.1242665	0	12.0000000

Poisson Model

The following statements fit a Poisson model to the data by using the covariates SEX, ILLNESS, INCOME, and HSCORE:

```
proc countreg data=docvisit;
  model doctorco=sex illness income hscore / dist=poisson printall;
run;
```

In this example, the DIST= option in the MODEL statement specifies the POISSON distribution. In addition, the PRINTALL option displays the correlation and covariance matrices for the parameters, log-likelihood values, and convergence information in addition to the parameter estimates. The parameter estimates for this model are shown in [Output 11.1.2](#).

Output 11.1.2 Parameter Estimates of Poisson Model

The COUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.855552	0.074545	-24.89	<.0001
sex	1	0.235583	0.054362	4.33	<.0001
illness	1	0.270326	0.017080	15.83	<.0001
income	1	-0.242095	0.077829	-3.11	0.0019
hscore	1	0.096313	0.009089	10.60	<.0001

Using the CLASS statement

If some regressors are categorical in nature (meaning that these variables can take only a few discrete qualitative values), specify them in the CLASS statement. In this example, SEX is categorical because it takes only two values. A class variable can be numeric or character.

Consider the following extension:

```
proc countreg data=docvisit;
  class sex;
  model doctorco=sex illness income hscore / dist=poisson;
run;
```

The partial output is given in [Output 11.1.3](#).

Output 11.1.3 Parameter Estimates of Poisson Model with CLASS statement

The COUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.619969	0.063985	-25.32	<.0001
sex 0	1	-0.235583	0.054362	-4.33	<.0001
sex 1	0	0	.	.	.
illness	1	0.270326	0.017080	15.83	<.0001
income	1	-0.242095	0.077829	-3.11	0.0019
hscore	1	0.096313	0.009089	10.60	<.0001

If the CLASS statement is present, the COUNTREG procedure creates as many indicator or dummy variables as there are categories in a class variable and uses them as independent variables. In order to avoid collinearity with the intercept, the last-created dummy variable is assigned a zero coefficient by default. This means that only the dummy variable associated with the first level of sex (male=0) is used as a regressor. Consequently, the estimated coefficient for this dummy variable is the negative of the one for the original SEX variable in [Output 11.1.2](#) because the reference level has switched from male to female.

Now consider a more practical task. The previous example implicitly assumed that each additional illness during the two-week interval has the same effect. In other words, this variable was thought of as a continuous variable. But this variable has only six values, and it is quite possible that the number of illnesses has a nonlinear effect on doctor visits. In order to check this conjecture, the following statements specify ILLNESS in the CLASS statement so that it is represented in the model by a set of six dummy variables that can account for any type of nonlinearity.

```
proc countreg data=docvisit;
  class sex illness;
  model doctorco=sex illness income hscore / dist=poisson;
run;
```

The parameter estimates are displayed in [Output 11.1.4](#).

Output 11.1.4 Parameter Estimates of Poisson Model with CLASS statement

The COUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-0.385930	0.088062	-4.38	<.0001
sex 0	1	-0.219118	0.054190	-4.04	<.0001
sex 1	0	0	.	.	.
illness 0	1	-1.934983	0.121267	-15.96	<.0001
illness 1	1	-0.698307	0.089732	-7.78	<.0001
illness 2	1	-0.471100	0.090742	-5.19	<.0001
illness 3	1	-0.488481	0.099127	-4.93	<.0001
illness 4	1	-0.272372	0.107593	-2.53	0.0114
illness 5	0	0	.	.	.
income	1	-0.253583	0.077441	-3.27	0.0011
hscore	1	0.094590	0.009025	10.48	<.0001

Each ILLNESS parameter in this model represents the difference between each effect of ILLNESS and ILLNESS=5. Note that these estimates for different ILLNESS categories do not increase linearly, but instead show a relatively large jump from zero illnesses to one followed by relatively smaller increases.

Zero-Inflated Poisson model

Suppose that you suspect that the population of individuals can be viewed as two distinct groups: a low-risk group, consisting of individuals who never go to the doctor, and a high-risk group, consisting of individuals who do go to the doctor. You might suspect that the data have this structure both because the sample variance of DOCTORCO (0.64) exceeds its sample mean (0.30), which suggests overdispersion, and also because a large fraction of the DOCTORCO observations (80%) have the value zero. Estimating a zero-inflated model is one way to deal with overdispersion that results from excess zeros.

Suppose also that you suspect that the covariate AGE has an impact on whether an individual belongs to the low-risk group. For example, younger individuals might have illnesses of much lower severity when they do get sick and be less likely to visit a doctor, all else being equal. The following statements estimate a zero-inflated Poisson regression with AGE as a covariate in the zero-generation process:

```
proc countreg data=docvisit;
  model doctorco=sex illness income hscore / dist=zip;
  zeromodel doctorco ~ age;
run;
```

In this case, the ZEROMODEL statement that follows the MODEL statement specifies that both an intercept and the variable AGE be used to estimate the likelihood of zero doctor visits. [Output 11.1.5](#) shows the resulting parameter estimates.

Output 11.1.5 Parameter Estimates for ZIP Model

The COUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.033387	0.096973	-10.66	<.0001
sex	1	0.122511	0.062566	1.96	0.0502
illness	1	0.237478	0.019997	11.88	<.0001
income	1	-0.143945	0.087810	-1.64	0.1012
hscore	1	0.088386	0.010043	8.80	<.0001
Inf_Intercept	1	0.986557	0.131339	7.51	<.0001
Inf_age	1	-2.090923	0.270580	-7.73	<.0001

The estimates of the zero-inflated intercept (Inf_Intercept) and the zero-inflated regression coefficient for AGE (Inf_age) are approximately 0.99 and -2.09, respectively. Since the zero-inflation model uses a logistic link by default, you can estimate the probabilities for individuals of ages 20, 50, and 70 as follows:

$$\begin{aligned}
 \text{20 years: } & \frac{e^{(0.99-2.09*.20)}}{1 + e^{(0.99-2.09*.20)}} = 0.64 \\
 \text{50 years: } & \frac{e^{(0.99-2.09*.50)}}{1 + e^{(0.99-2.09*.50)}} = 0.49 \\
 \text{70 years: } & \frac{e^{(0.99-2.09*.70)}}{1 + e^{(0.99-2.09*.70)}} = 0.38
 \end{aligned}$$

That is, the estimated probability of belonging to the low-risk group is about 0.64 for a 20-year-old individual, 0.49 for a 50-year-old individual, and only 0.38 for a 70-year-old individual. This supports the suspicion that older individuals are more likely to have a positive number of doctor visits.

Alternative models to account for the overdispersion are the negative binomial and the zero-inflated negative binomial models, which can be fit using the DIST=NEGBIN and DIST=ZINB options, respectively.

Example 11.2: ZIP and ZINB Models for Data Exhibiting Extra Zeros

In the study by Long (1997) of the number of published articles by scientists (see the section “[Getting Started: COUNTREG Procedure](#)” on page 557), the observed proportion of scientists who publish no articles is 0.3005. The following statements use PROC FREQ to compute the proportion of scientists who publish each observed number of articles. [Output 11.2.1](#) shows the results.

```
proc freq data=long97data;
  table art / out=obs;
run;
```

Output 11.2.1 Proportion of Scientists Who Publish a Certain Number of Articles

The FREQ Procedure				
art	Frequency	Percent	Cumulative Frequency	Cumulative Percent
0	275	30.05	275	30.05
1	246	26.89	521	56.94
2	178	19.45	699	76.39
3	84	9.18	783	85.57
4	67	7.32	850	92.90
5	27	2.95	877	95.85
6	17	1.86	894	97.70
7	12	1.31	906	99.02
8	1	0.11	907	99.13
9	2	0.22	909	99.34
10	1	0.11	910	99.45
11	1	0.11	911	99.56
12	2	0.22	913	99.78
16	1	0.11	914	99.89
19	1	0.11	915	100.00

PROC COUNTREG is then used to fit Poisson and negative binomial models to the data. For each model, the PROBCOUNT option computes the probability that the number of published articles is m , for $m = 0$ to 10. The following statements compute the estimates for Poisson and negative binomial models. The MEAN procedure is then used to compute the average probability of a zero response.

```
proc countreg data=long97data;
  model art=fem mar kid5 phd ment / dist=poisson;
  output out=predpoi probcount(0 to 10);
run;

proc means mean data=predpoi;
  var p_0;
run;
```

The output from the Poisson model for the COUNTREG and MEAN procedures is shown in [Output 11.2.2](#).

Output 11.2.2 Poisson Model Estimation

```

The COUNTREG Procedure

Model Fit Summary

Dependent Variable          art
Number of Observations      915
Data Set                    WORK.LONG97DATA
Model                      Poisson
Log Likelihood              -1651
Maximum Absolute Gradient    3.5741E-9
Number of Iterations        5
Optimization Method         Newton-Raphson
AIC                         3314
SBC                         3343

Algorithm converged.

Parameter Estimates

Parameter    DF      Estimate      Standard      t Value      Approx
              DF      Error        Pr > |t|

Intercept    1         0.304617      0.102982      2.96         0.0031
fem           1        -0.224594      0.054614     -4.11        <.0001
mar           1         0.155243      0.061375      2.53         0.0114
kid5          1        -0.184883      0.040127     -4.61        <.0001
phd           1         0.012823      0.026397      0.49         0.6271
ment          1         0.025543      0.002006     12.73        <.0001

The MEANS Procedure

Analysis Variable : P_0 Probability of art taking level=0

Mean
-----
0.2092071
-----

```

The following statements show the syntax for the negative binomial model:

```
proc countreg data=long97data;
  model art=fem mar kid5 phd ment / dist=negbin(p=2) method=qn;
  output out=prednb probcount(0 to 10);
run;

proc means mean data=prednb;
  var p_0;
run;
```

Output 11.2.3 shows the results of the preceding statements.

Output 11.2.3 Negative Binomial Model Estimation

The COUNTREG Procedure					
Model Fit Summary					
Dependent Variable					art
Number of Observations					915
Data Set				WORK.LONG97DATA	
Model				NegBin	
Log Likelihood				-1561	
Maximum Absolute Gradient				1.75584E-6	
Number of Iterations				16	
Optimization Method				Quasi-Newton	
AIC				3136	
SBC				3170	
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.256144	0.138560	1.85	0.0645
fem	1	-0.216418	0.072672	-2.98	0.0029
mar	1	0.150489	0.082106	1.83	0.0668
kid5	1	-0.176415	0.053060	-3.32	0.0009
phd	1	0.015271	0.036040	0.42	0.6718
ment	1	0.029082	0.003470	8.38	<.0001
_Alpha	1	0.441620	0.052967	8.34	<.0001
The MEANS Procedure					
Analysis Variable : P_0 Probability of art taking level=0					
Mean					

0.3035957					

For each model, the predicted proportion of zero articles can be calculated as the average predicted probability of zero articles across all scientists. Under the Poisson model, the predicted proportion of zero articles is 0.2092, which considerably underestimates the observed proportion. The negative binomial more closely estimates the proportion of zeros (0.3036). Also, the test of the dispersion parameter, $_Alpha$, in the negative binomial model indicates significant overdispersion ($p < 0.0001$). As a result, the negative binomial model is preferred to the Poisson model.

Another way to account for the large number of zeros in this data set is to fit a zero-inflated Poisson (ZIP) or a zero-inflated negative binomial (ZINB) model. In the following statements, `DIST=ZIP` requests the ZIP model. In the `ZEROMODEL` statement, you can specify the predictors, \mathbf{z} , for the process that generated the additional zeros. The `ZEROMODEL` statement also specifies the model for the probability φ . By default, a logistic model is used for φ . The default can be changed using the `LINK=` option. In this particular ZIP

model, all variables used to model the article counts are also used to model φ .

```
proc countreg data=long97data;
  model art = fem mar kid5 phd ment / dist=zip;
  zeromodel art ~ fem mar kid5 phd ment;
  output out=predzip probcount(0 to 10);
run;

proc means data=predzip mean;
  var p_0;
run;
```

The parameters of the ZIP model are displayed in [Output 11.2.4](#). The first set of parameters gives the estimates of β in the model for the Poisson process mean. Parameters with the prefix “Inf_” are the estimates of γ in the logistic model for φ .

Output 11.2.4 ZIP Model Estimation

The COUNTREG Procedure					
Model Fit Summary					
Dependent Variable	art				
Number of Observations	915				
Data Set	WORK.LONG97DATA				
Model	ZIP				
ZI Link Function	Logistic				
Log Likelihood	-1605				
Maximum Absolute Gradient	2.08803E-7				
Number of Iterations	16				
Optimization Method	Newton-Raphson				
AIC	3234				
SBC	3291				
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.640838	0.121306	5.28	<.0001
fem	1	-0.209145	0.063405	-3.30	0.0010
mar	1	0.103751	0.071111	1.46	0.1446
kid5	1	-0.143320	0.047429	-3.02	0.0025
phd	1	-0.006166	0.031008	-0.20	0.8424
ment	1	0.018098	0.002295	7.89	<.0001
Inf_Intercept	1	-0.577060	0.509383	-1.13	0.2573
Inf_fem	1	0.109747	0.280082	0.39	0.6952
Inf_mar	1	-0.354013	0.317611	-1.11	0.2650
Inf_kid5	1	0.217101	0.196481	1.10	0.2692
Inf_phd	1	0.001272	0.145262	0.01	0.9930
Inf_ment	1	-0.134114	0.045244	-2.96	0.0030

Output 11.2.4 *continued*

The MEANS Procedure	
Analysis Variable : P_0 Probability of art taking level=0	
	Mean
-----	-----
	0.2985679
-----	-----

The proportion of zeros predicted by the ZIP model is 0.2986, which is much closer to the observed proportion than the Poisson model. But [Output 11.2.6](#) shows that both models deviate from the observed proportions at one, two, and three articles.

The ZINB model is specified by the DIST=ZINB option. All variables are again used to model both the number of articles and φ . The METHOD=QN option specifies that the quasi-Newton method be used to fit the model rather than the default Newton-Raphson method. These options are implemented in the following statements:

```
proc countreg data=long97data;
  model art=fem mar kid5 phd ment / dist=zinb method=qn;
  zeromodel art ~ fem mar kid5 phd ment;
  output out=predzinb probcount(0 to 10);
run;

proc means data=predzinb mean;
  var p_0;
run;
```

The estimated parameters of the ZINB model are shown in [Output 11.2.5](#). The test for overdispersion again indicates a preference for the negative binomial version of the zero-inflated model ($p < 0.0001$). The ZINB model also does a good job of estimating the proportion of zeros (0.3119), and it follows the observed proportions well, though possibly not as well as the negative binomial model.

Output 11.2.5 ZINB Model Estimation

The COUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	ZINB
ZI Link Function	Logistic
Log Likelihood	-1550
Maximum Absolute Gradient	0.00591
Number of Iterations	81
Optimization Method	Quasi-Newton
AIC	3126
SBC	3189

Output 11.2.5 *continued*

Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.416747	0.143596	2.90	0.0037
fem	1	-0.195507	0.075592	-2.59	0.0097
mar	1	0.097583	0.084452	1.16	0.2479
kid5	1	-0.151733	0.054206	-2.80	0.0051
phd	1	-0.000700	0.036270	-0.02	0.9846
ment	1	0.024786	0.003493	7.10	<.0001
Inf_Intercept	1	-0.191679	1.322795	-0.14	0.8848
Inf_fem	1	0.635924	0.848902	0.75	0.4538
Inf_mar	1	-1.499439	0.938648	-1.60	0.1102
Inf_kid5	1	0.628412	0.442777	1.42	0.1558
Inf_phd	1	-0.037719	0.308003	-0.12	0.9025
Inf_ment	1	-0.882281	0.316219	-2.79	0.0053
_Alpha	1	0.376680	0.051029	7.38	<.0001
The MEANS Procedure					
Analysis Variable : P_0 Probability of art taking level=0					
Mean					

0.3119486					

The following statements compute the average predicted count probability across all scientists for each count 0, 1, ..., 10. The averages for each model, along with the observed proportions, are then arranged for plotting by PROC SGPLOT.

```
proc summary data=predpoi;
  var p_0-p_10;
  output out=mnpoi mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=prednb;
  var p_0-p_10;
  output out=mnnb mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=predzip;
  var p_0-p_10;
  output out=mnzip mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=predzinb;
  var p_0-p_10;
  output out=mnzinb mean(p_0-p_10)=mn0-mn10;
run;
```

```

data means;
    set mnpoi mnnb mnzip mnzinb;
    drop _type_ _freq_;
run;

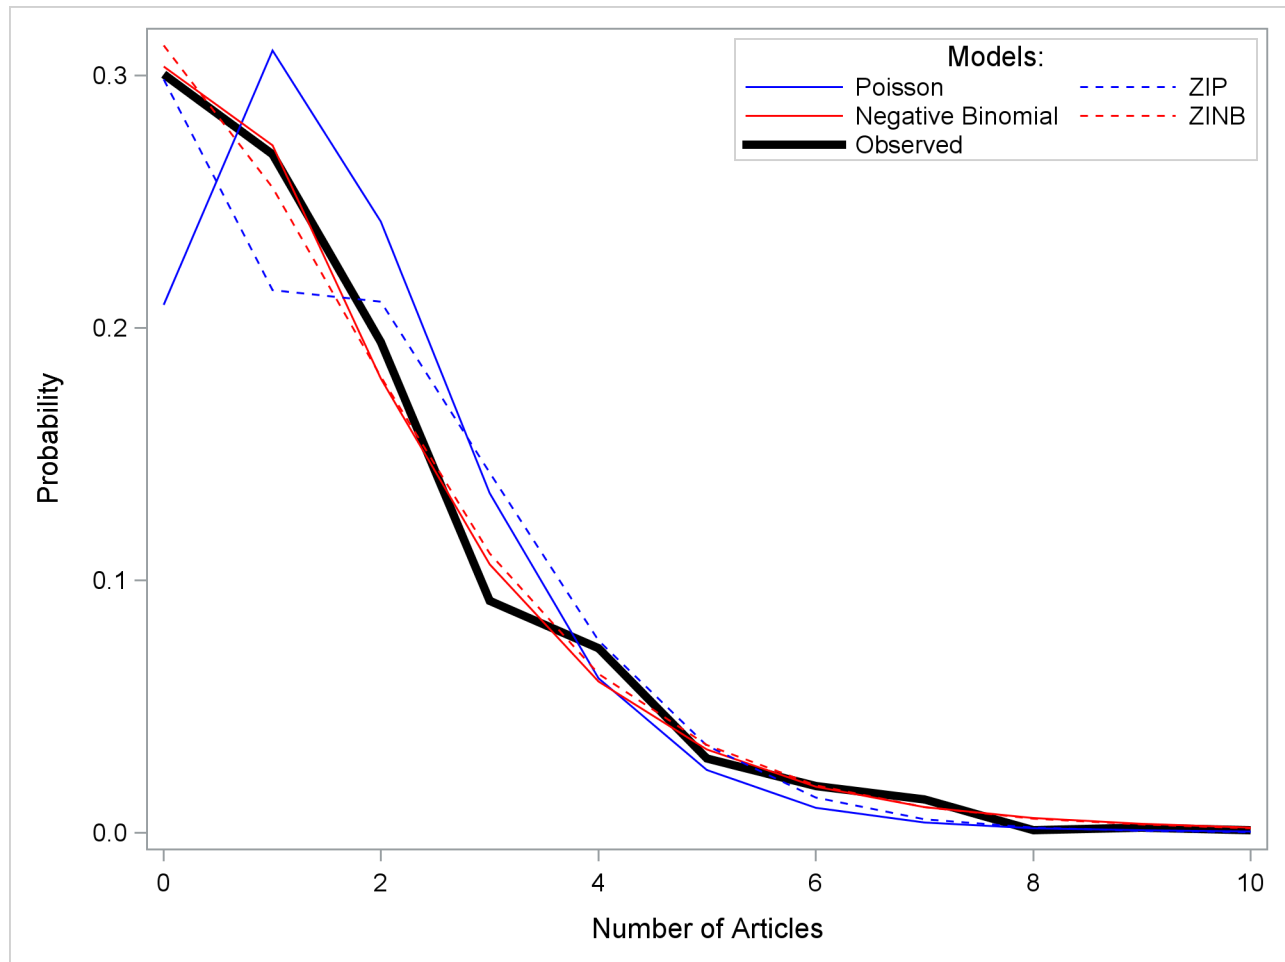
proc transpose data=means out=tmeans;
run;

data allpred;
    merge obs(where=(art<=10)) tmeans;
    obs=percent/100;
run;

proc sgplot;
    yaxis label='Probability';
    xaxis label='Number of Articles';
    series y=obs x=art / name='obs' legendlabel='Observed'
        lineattrs=(color=black thickness=4px);
    series y=col1 x=art / name='poi' legendlabel='Poisson'
        lineattrs=(color=blue);
    series y=col2 x=art / name='nb' legendlabel='Negative Binomial'
        lineattrs=(color=red);
    series y=col3 x=art / name='zip' legendlabel='ZIP'
        lineattrs=(color=blue pattern=2);
    series y=col4 x=art / name='zinb' legendlabel='ZINB'
        lineattrs=(color=red pattern=2);
    discretelegend 'poi' 'zip' 'nb' 'zinb' 'obs' / title='Models:'
        location=inside position=ne across=2 down=3;
run;

```

For each of the four fitted models, [Output 11.2.6](#) shows the average predicted count probability for each article count across all scientists. The Poisson model clearly underestimates the proportion of zero articles published, while the other three models are quite accurate at zero. All of the models do well at the larger numbers of articles.

Output 11.2.6 Average Predicted Count Probability

References

- Abramowitz, M. and Stegun, A. (1970), *Handbook of Mathematical Functions*, New York: Dover Press.
- Amemiya, T. (1985), *Advanced Econometrics*, Cambridge: Harvard University Press.
- Cameron, A. C. and Trivedi, P. K. (1986), "Econometric Models Based on Count Data: Comparisons and Applications of Some Estimators and Some Tests," *Journal of Applied Econometrics*, 1, 29–53.
- Cameron, A. C. and Trivedi, P. K. (1998), *Regression Analysis of Count Data*, Cambridge: Cambridge University Press.
- Godfrey, L. G. (1988), *Misspecification Tests in Econometrics*, Cambridge: Cambridge University Press.
- Greene, W. H. (1994), "Accounting for Excess Zeros and Sample Selection in Poisson and Negative Binomial Regression Models," *Working Paper No. 94-10*, New York: Stern School of Business, Department of Economics, New York University.

Greene, W. H. (2000), *Econometric Analysis*, Upper Saddle River, NJ: Prentice Hall.

Hausman, J. A., Hall, B. H., and Griliches, Z. (1984), "Econometric Models for Count Data with an Application to the Patents-R&D Relationship," *Econometrica*, 52, 909–938.

King, G. (1989a), "A Seemingly Unrelated Poisson Regression Model," *Sociological Methods and Research*, 17, 235–255.

King, G. (1989b), *Unifying Political Methodology: The Likelihood Theory and Statistical Inference*, Cambridge: Cambridge University Press.

Lambert, D. (1992), "Zero-Inflated Poisson Regression with an Application to Defects in Manufacturing," *Technometrics*, 34, 1–14.

LaMotte, L. R. (1994), "A Note on the Role of Independence in t Statistics Constructed from Linear Statistics in Regression Models," *The American Statistician*, 48, 238–240.

Long, J. S. (1997), *Regression Models for Categorical and Limited Dependent Variables*, Thousand Oaks, CA: Sage Publications.

Searle, S. R. (1971), *Linear Models*, New York: John Wiley & Sons.

Winkelmann, R. (2000), *Econometric Analysis of Count Data*, Berlin: Springer-Verlag.

Chapter 12

The DATASOURCE Procedure

Contents

Overview: DATASOURCE Procedure	600
Getting Started: DATASOURCE Procedure	602
Structure of a SAS Data Set Containing Time Series Data	602
Reading Data Files	603
Subsetting Input Data Files	603
Controlling the Frequency of Data – The INTERVAL= Option	603
Selecting Time Series Variables – The KEEP and DROP Statements	604
Controlling the Time Range of Data – The RANGE Statement	607
Reading in Data Files Containing Cross Sections	607
Obtaining Descriptive Information on Cross Sections	609
Subsetting a Data File Containing Cross Sections	612
Renaming Time Series Variables	612
Changing the Lengths of Numeric Variables	614
Syntax: DATASOURCE Procedure	615
PROC DATASOURCE Statement	616
KEEP Statement	619
DROP Statement	620
KEEPEVENT Statement	621
DROPEVENT Statement	621
WHERE Statement	622
RANGE Statement	622
ATTRIBUTE Statement	624
FORMAT Statement	624
LABEL Statement	625
LENGTH Statement	625
RENAME Statement	625
Details: DATASOURCE Procedure	626
Variable Lists	626
OUT= Data Set	627
OUTCONT= Data Set	628
OUTBY= Data Set	629
OUTALL= Data Set	630
OUTEVENT= Data Set	631
Data Elements Reference: DATASOURCE Procedure	632

Examples: DATASOURCE Procedure	657
Example 12.1: BEA National Income and Product Accounts	657
Example 12.2: BLS Consumer Price Index Surveys	660
Example 12.3: BLS State and Area Employment, Hours, and Earnings Surveys	665
Example 12.4: DRI/McGraw-Hill Format CITIBASE Files	667
Example 12.5: DRI Data Delivery Service Database	672
Example 12.6: PC Format CITIBASE Database	675
Example 12.7: Quarterly COMPUSTAT Data Files	677
Example 12.8: Annual COMPUSTAT Data Files, V9.2 New Filetype CSAUC3	679
Example 12.9: CRSP Daily NYSE/AMEX Combined Stocks	682
References	687

Overview: DATASOURCE Procedure

The DATASOURCE procedure extracts time series and event data from many different kinds of data files distributed by various data vendors and stores them in a SAS data set. Once stored in a SAS data set, the time series and event variables can be processed by other SAS procedures.

The DATASOURCE procedure has statements and options to extract only a subset of time series data from an input data file. It gives you control over the frequency of data to be extracted, time series variables to be selected, cross sections to be included, and time range of data to be output.

The DATASOURCE procedure can create auxiliary data sets containing descriptive information on the time series variables and cross sections. More specifically, the OUTCONT= option names a data set containing information on time series variables, the OUTBY= option names a data set that reports information on cross-sectional variables, and the OUTALL= option names a data set that combines both time series variables and cross-sectional information.

In addition to the auxiliary data sets, two types of primary output data sets are the OUT= and OUTEVENT= data sets. The OUTEVENT= data set contains event variables but excludes periodic time series data. The OUT= data set contains periodic time series data and any event variables referenced in the KEEP statement.

The output variables in the output and auxiliary data sets can be assigned various attributes by the DATASOURCE procedure. These attributes are labels, formats, new names, and lengths. While the first three attributes in this list are used to enhance the output, the length attribute is used to control the memory and disk-space usage of the DATASOURCE procedure.

Data files currently supported by the DATASOURCE procedure include the following:

- U.S. Bureau of Economic Analysis data files:
 - National Income and Product Accounts
 - National Income and Product Accounts PC format
 - S-pages

- U.S. Bureau of Labor Statistics data files:
 - Consumer Price Index Surveys
 - Producer Price Index Survey
 - National Employment, Hours, and Earnings Survey
 - State and Area Employment, Hours, and Earnings Survey
- Standard & Poor's Compustat Services Financial Database Files:
 - COMPUSTAT Annual
 - COMPUSTAT 48 Quarter
 - COMPUSTAT Full Coverage Annual
 - COMPUSTAT Full Coverage 48 Quarter
- Center for Research in Security Prices (CRSP) data files:
 - Daily Binary Format Files
 - Monthly Binary Format Files
 - Daily Character Format Files
 - Monthly Character Format Files
- Global Insight, formerly DRI/McGraw-Hill data files:
 - Basic Economics Data (formerly CITIBASE)
 - DRI Data Delivery Service files
 - CITIBASE Data Files
 - DRI Data Delivery Service Time Series
 - PC Format CITIBASE Databases
- FAME Information Services Databases
- Haver Analytics data files
 - United States Economic Indicators
 - Specialized Databases
 - Financial Indicators
 - Industry
 - Industrial Countries
 - Emerging Markets
 - International Organizations
 - Forecasts and As Reported Data
 - United States Regional

- International Monetary Fund's Economic Information System data files:
 - International Financial Statistics
 - Direction of Trade Statistics
 - Balance of Payment Statistics
 - Government Finance Statistics
- Organization for Economic Cooperation and Development:
 - Annual National Accounts
 - Quarterly National Accounts
 - Main Economic Indicators

Getting Started: DATASOURCE Procedure

Structure of a SAS Data Set Containing Time Series Data

SAS procedures require time series data to be in a specific form recognizable by the SAS System. This form is a two-dimensional array, called a SAS data set, whose columns correspond to series variables and whose rows correspond to measurements of these variables at certain time periods.

The time periods at which observations are recorded can be included in the data set as a time ID variable. The DATASOURCE procedure does include a time ID variable by the name of DATE.

For example, the following data set in [Table 12.1](#), extracted from a DRIBASIC data file, gives the foreign exchange rates for Japan, Switzerland, and the United Kingdom, respectively.

Table 12.1 The Form of SAS Data Sets Required by Most SAS/ETS Procedures

Time ID Variable	Time Series Variables		
DATE	EXRJAN	EXRSW	EXRUK
SEP1987	143.290	1.50290	164.460
OCT1987	143.320	1.49400	166.200
NOV1987	135.400	1.38250	177.540
DEC1987	128.240	1.33040	182.880
JAN1988	127.690	1.34660	180.090
FEB1988	129.170	1.39160	175.820

Reading Data Files

The DATASOURCE procedure is designed to read data from many different files and to place them in a SAS data set. For example, if you have a DRI Basic Economics data file you want to read, use the following statements:

```
proc datasource filetype=dribasic infile=citifile out=dataset;  
run;
```

Here, the FILETYPE= option indicates that you want to read DRI's Basic Economics data file, the INFILE= option specifies the fileref CITIFILE of the external file you want to read, and the OUT= option names the SAS data set to contain the time series data.

Subsetting Input Data Files

When only a subset of a data file is needed, it is inefficient to extract all the data and then subset it in a subsequent DATA step. Instead, you can use the DATASOURCE procedure options and statements to extract only needed information from the data file.

The DATASOURCE procedure offers the following subsetting capabilities:

- the INTERVAL= option controls the frequency of data output
- the KEEP or DROP statement selects a subset of time series variables
- the RANGE statement restricts the time range of data
- the WHERE statement selects a subset of cross sections

Controlling the Frequency of Data – The INTERVAL= Option

The OUT= data set contains only data with the same frequency. If the data file you want to read contains time series data with several frequencies, you can indicate the frequency of data you want to extract with the INTERVAL= option. For example, the following statements extract all monthly time series from the DRIBASIC file CITIFILE:

```
proc datasource filetype=dribasic infile=citifile  
                interval=month out=dataset;  
run;
```

When the INTERVAL= option is not given, the default frequency defined for the FILETYPE= type file is used. For example, the statements in the previous section extract yearly series since INTERVAL=YEAR is the default frequency for DRI's Basic Economic Data files.

To extract data for several frequencies, you need to execute the DATASOURCE procedure once for each frequency.

Selecting Time Series Variables – The KEEP and DROP Statements

If you want to include specific series in the OUT= data set, list them in a KEEP statement. If, on the other hand, you want to exclude some variables from the OUT= data set, list them in a DROP statement. For example, the following statements extract monthly foreign exchange rates for Japan (EXRJAN), Switzerland (EXRSW), and the United Kingdom (EXRUK) from a DRIBASIC file CITIFILE:

```
proc datasource filetype=dribasic infile=citifile
               interval=month out=dataset;
  keep  exrjan exrsw exrux;
run;
```

The KEEP statement also allows input names to be quoted strings. If the name of a series in the input file contains blanks or special characters that are not valid SAS name syntax, put the series name in quotes to select it. Another way to allow the use of special characters in your SAS variable names is to use the SAS options statement to designate VALIDVARNAME=ANY. This option will allow PROC DATASOURCE to include special characters in your SAS variable names. The following is an example of extracting series from a FAME database by using the DATASOURCE procedure.

```
proc datasource filetype=fame dbname='fame_nys /disk1/prc/prc'
               interval=weekday out=outds outcont=attrds;
  range '1jan90'd to '1feb90'd;
  keep cci.close
     '{ibm.high,ibm.low,ibm.close}'
     'mave(ibm.close,30)'
     'crosslist({gm,f,c},{volume})'
     'cci.close+ibm.close';
  rename 'mave(ibm.close,30)' = ibm30day
         'cci.close+ibm.close' = cci_ibm;
run;
```

The resulting output data set OUTDS contains the following series: DATE, CCI_CLOS, IBM_HIGH, IBM_LOW, IBM_CLOS, IBM30DAY, GM_VOLUM, F_VOLUME, C_VOLUME, CCI_IBM.

Obviously, to be able to use KEEP and DROP statements, you need to know the name of time series variables available in the data file. The OUTCONT= option gives you this information. More specifically, the OUTCONT= option creates a data set containing descriptive information on the same frequency time series. This descriptive information includes series names, a flag indicating if the series is selected for output, series variable types, lengths, position of series in the OUT= data set, labels, format names, format lengths, format decimals, and a set of FILETYPE= specific descriptor variables.

For example, the following statements list some of the monthly series available in the CITIFILE and are shown in [Figure 12.1](#).

```
/*-- Selecting Time Series Variables -- The KEEP and DROP Statements --*/
filename citifile "%sysget(DATASRC_DATA)citiaf.dat" RECFM=F LRECL=80;
proc datasource filetype=dribasic infile=citifile
               interval=month outcont=vars;
    drop e: ;
run;

title1 'Some Time Series Variables Available in CITIFILE';
proc print data=vars;
run;
```

Figure 12.1 Listing of the OUTCONT= Data Set

Some Time Series Variables Available in CITIFILE						
Obs	NAME	KEPT	SELECTED	TYPE	LENGTH	VARNUM
1	BUS	1	1	1	5	.
2	CCBPY	1	1	1	5	.
3	CCI30M	1	1	1	5	.
4	CCIPY	1	1	1	5	.
5	COCI77	1	1	1	5	.
6	CONU	1	1	1	5	.
7	DLEAD	1	1	1	5	.
8	F6CMB	1	1	1	5	.
9	F6EDM	1	1	1	5	.
10	WTNO8	1	1	1	5	.
11	WTNR	1	1	1	5	.
12	WTR	1	1	1	5	.

Obs	LABEL
1	INDEX OF NET BUSINESS FORMATION, (1967=100;SA)
2	RATIO, CONSUMER INSTAL CREDIT TO PERSONAL INCOME (%;SA) (BCD-95)
3	CONSUMER INSTAL.LOANS: DELINQUENCY RATE,30 DAYS & OVER, (%;SA)
4	RATIO, CONSUMER INSTAL CREDIT TO PERSONAL INCOME (%;SA) (BCD-95)
5	CONSTRUCTION COST INDEX: DEPT OF COMMERCE COMPOSITE (1977=100,NSA)
6	CONSTRUCT.PUT IN PLACE: PRIV NEW HOUSING UNITS (MIL\$,SAAR)
7	COMPOSITE INDEX OF 12 LEADING INDICATORS (67=100,SA)
8	DEPOSITORY INST RESERVES: TOTAL BORROWINGS AT RES BANKS (MIL\$,NSA)
9	U.S.MDSE EXPORTS: MANUFACTURED GOODS (MIL\$,NSA)
10	MFG & TRADE SALES: MERCHANT WHOLESALERS, OTHR NONDUR GDS, 82\$
11	MERCHANT WHOLESALERS' SALES: NONDURABLE GOODS (MIL\$,SA)
12	MERCHANT WHOLESALERS' SALES: TOTAL (MIL\$,SA)

Obs	FORMAT	FORMATL	FORMATD	CODE
1		0	0	BUS
2		0	0	CCBPY
3		0	0	CCI30M
4		0	0	CCIPY
5		0	0	COCI77
6		0	0	CONU
7		0	0	DLEAD
8		0	0	F6CMB
9		0	0	F6EDM
10		0	0	WTNO8
11		0	0	WTNR
12		0	0	WTR

Controlling the Time Range of Data – The RANGE Statement

The RANGE statement is used to control the time range of observations included in the output data set. Figure 12.2 shows an example extracting the foreign exchange rates from September 1985 to February 1987, you can use the following statements:

```
/*-- Controlling the Time Range of Data - The RANGE Statement --*/
filename citifile "%sysget(DATASRC_DATA)citiaf.dat" RECFM=F LRECL=80;
proc datasource filetype=dribasic infile=citifile
    interval=month out=dataset;
    keep exrjan exrsw exruk;
    range from 1985:9 to 1987:2;
run;

title1 'Printout of the OUT= Data Set';
proc print data=dataset;
run;
```

Figure 12.2 Subset Obtained by KEEP and RANGE Statements

Printout of the OUT= Data Set				
Obs	DATE	EXRJAN	EXRSW	EXRUK
1	SEP1985	236.530	2.37490	136.420
2	OCT1985	214.680	2.16920	142.150
3	NOV1985	204.070	2.13060	143.960
4	DEC1985	202.790	2.10420	144.470
5	JAN1986	199.890	2.06600	142.440
6	FEB1986	184.850	1.95470	142.970
7	MAR1986	178.690	1.91500	146.740
8	APR1986	175.090	1.90160	149.850
9	MAY1986	167.030	1.85380	152.110
10	JUN1986	167.540	1.84060	150.850
11	JUL1986	158.610	1.74450	150.710
12	AUG1986	154.180	1.66160	148.610
13	SEP1986	154.730	1.65370	146.980
14	OCT1986	156.470	1.64330	142.640
15	NOV1986	162.850	1.68580	142.380
16	DEC1986	162.050	1.66470	143.930
17	JAN1987	154.830	1.56160	150.540
18	FEB1987	153.410	1.54030	152.800

Reading in Data Files Containing Cross Sections

Some data files group time series data with respect to cross-section identifiers; for example, International Financial Statistics files, distributed by IMF, group data with respect to countries (COUNTRY). Within each country, data are further grouped by Control Source Code (CSC), Partner Country Code (PARTNER), and Version Code (VERSION).

If a data file contains cross-section identifiers, the DATASOURCE procedure adds them to the output data set as BY variables. For example, the data set in [Table 12.2](#) contains three cross sections:

- Cross-section one is identified by (COUNTRY='112' CSC='F' PARTNER=' ' VERSION='Z').
- Cross-section two is identified by (COUNTRY='146' CSC='F' PARTNER=' ' VERSION='Z').
- Cross-section three is identified by (COUNTRY='158' CSC='F' PARTNER=' ' VERSION='Z').

Table 12.2 The Form of a SAS Data Set Containing BY Variables

BY Variables				Time ID Variable	Time Series Variables	
COUNTRY	CSC	PARTNER	VERSION	DATE	EFFEXR	EXRINDEX
112	F		Z	SEP1987	9326	12685
112	F		Z	OCT1987	9393	12813
112	F		Z	NOV1987	9626	13694
112	F		Z	DEC1987	9675	14099
112	F		Z	JAN1988	9581	13910
112	F		Z	FEB1988	9493	13549
146	F		Z	SEP1987	12046	16192
146	F		Z	OCT1987	12067	16266
146	F		Z	NOV1987	12558	17596
146	F		Z	DEC1987	12759	18301
146	F		Z	JAN1988	12642	18082
146	F		Z	FEB1988	12409	17470
158	F		Z	SEP1987	13841	16558
158	F		Z	OCT1987	13754	16499
158	F		Z	NOV1987	14222	17505
158	F		Z	DEC1987	14768	18423
158	F		Z	JAN1988	14933	18565
158	F		Z	FEB1988	14915	18331

Note that the data sets in [Table 12.1](#) and [Table 12.2](#) use two different ways of representing time series data for three different countries: the United Kingdom (COUNTRY='112'), Switzerland (COUNTRY='146'), and Japan (COUNTRY='158'). The first representation ([Table 12.1](#)) incorporates each country's name into the series names, while the second representation ([Table 12.2](#)) represents countries as different cross sections by using the BY variable named COUNTRY. See “Time Series and SAS Data Sets” in Chapter 3, “[Working with Time Series Data](#).”

Obtaining Descriptive Information on Cross Sections

If you want to know the unique set of values BY variables assume for each cross section in the data file, use the OUTBY= option. For example, the following statements list some of the cross sections available for an IFS file, and are shown in Figure 12.3.

```
filename ifsfile "%sysget(DATASRC_DATA)imfifs1.dat" RECFM=F LRECL=88;
proc datasource
  filetype=imfifsp infile=ifsfile
  outselect=on ebclic
  interval=month
  outby=xsection;
run;

title1 'Some Cross Sections Available in IFSFILE';
proc print data=xsection;
run;
```

Figure 12.3 Listing of the OUTBY= Data Set

Some Cross Sections Available in IFSFILE											
	C	P	V	S	E			N	N		C
	O	A	E	T	N			S	S		N
	U	R	R	—	—	N		E	E		Y
	N	T	S	D	D	T	N	R	L		N
O	T	C	N	I	A	A	I	O	I	E	A
b	R	S	E	O	T	T	M	B	E	C	M
s	Y	C	R	N	E	E	E	S	S	T	E
1	111	F		Z	JAN1957	SEP1986	357	357	6	3	UNITED STATES
2	112	F		Z	JAN1957	SEP1986	357	357	6	3	UNITED KINGDOM
3	146	F		Z	JAN1957	SEP1986	357	357	6	3	SWITZERLAND
4	158	F		Z	JAN1957	SEP1986	357	357	6	3	JAPAN
5	186	F		Z	JAN1957	SEP1986	357	357	6	3	TURKEY

The OUTBY= data set reports the total number of series, NSERIES, defined in each cross section, NSELECT of which represent the selected variables. If you want to see the descriptive information on each of these NSELECT variables for each cross section, specify the OUTALL= option. For example, the following statements print descriptive information on all monthly series defined for all cross sections (COUNTRY='111', COUNTRY='112', COUNTRY='146', COUNTRY='158', and COUNTRY='186') which are shown in [Figure 12.4](#).

```
filename datafile "%sysget(DATASRC_DATA)imfifs1.dat" RECFM=F LRECL=88;

title3 'Time Series Defined in Cross Section';
proc datasource filetype=imfifsp
    outselect=on ebclic
    interval=month
    outall=ifsall;
run;

title4 'Cross Sections Available in OUTALL=IFSALL Data Set';
proc print
    data=ifsall;
run;
```

Figure 12.4 Listing of the OUTALL= Data Set

Some Cross Sections Available in IFSFILE

Time Series Defined in Cross Section
Cross Sections Available in OUTALL=IFSALL Data Set

	C	P	V	S																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
--	---	---	---	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

The OUTCONT= data set contains one observation for each time series variable with the descriptive information summarized over BY groups. When the data file contains no cross sections, the OUTCONT= and OUTALL= data sets are equivalent, except that the OUTALL= data set also reports time ranges of available data. The OUTBY= data set in this case contains a single observation reporting the number of series and time ranges for the whole data file.

Subsetting a Data File Containing Cross Sections

Data files containing cross sections can be subsetted by controlling which cross sections to include in the output data set. Selecting a subset of cross sections is accomplished using the WHERE statement. The WHERE statement gives a condition that the BY variables must satisfy for a cross section to be selected. For example, the following statements extract the monthly market rate conversion factors for the United Kingdom (COUNTRY='112') and Switzerland (COUNTRY='146') for the period from September 1985 to February 1986.

```
filename datafile "%sysget(DATASRC_DATA)imfifs1.dat" RECFM=F LRECL=88;

title3 'Time Series Defined in Selected Cross Sections';
proc datasource filetype=imfifsp
    outselect=on ebcdic
    interval=month
    out=ifs;

    where country in ('146', '112') and partner=' ';
    keep F__AA F__AC;
    range from '01sep85'd to '01feb86'd;
run;

title4 'OUTALL=IFS Data Set';
proc print
    data=ifs;
run;
```

Renaming Time Series Variables

Sometimes the time series variable names as given by data vendors are not descriptive enough, or you may prefer a different naming convention. In such cases, you can use the RENAME statement to assign more meaningful names to time series variables. You can also use LABEL statements to associate descriptive labels with your series variables.

For example, the series names for market rate conversion factor (F__AA) and market rate conversion factor (F__AC) used by IMF can be given more descriptive names and labels by the following statements and are shown in [Figure 12.5](#) and [Figure 12.6](#).

```
filename ifsfile "%sysget(DATASRC_DATA)imfifs1.dat" RECFM=F LRECL=88;
```

```

proc datasource filetype=imfifsp infile=ifsfile
    interval=month
    out=market outcont=mrktvars;
where country in ('112','146','158') and partner=' ';
keep f__aa f__ac;
range from '01jun85'd to '01feb86'd;
rename f__aa=alphmkt f__ac=charmkt;
label f__aa='F__AA: Market Rate Conversion Factor Used in Alpha Test'
      f__ac='F__AC: Market Rate Conversion Used in Charlie Test';
run;

title1 'Printout of OUTCONT= Showing New NAMES and LABELs';
proc print data=mrktvars ;
    var name label length;
run;

title1 'Contents of OUT= Showing New NAMES and LABELs';
proc contents data=market;
run;

```

The RENAME statement allows input names to be quoted strings. If the name of a series in the input file contains blanks or special characters that are not in valid SAS name syntax, use the SAS option VALIDVARNAME=ANY or put the series name in quotes to rename it. See the FAME example using rename in the “[Selecting Time Series Variables – The KEEP and DROP Statements](#)” on page 604 section.

Figure 12.5 Renaming and Labeling Variables

Printout of OUTCONT= Showing New NAMES and LABELs			
Obs	NAME	LABEL	LENGTH
1	alphmkt	F__AA: Market Rate Conversion Factor Used in Alpha Test	5
2	charmkt	F__AC: Market Rate Conversion Used in Charlie Test	5

Figure 12.6 Renaming and Labeling Variables

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	COUNTRY	Char	3	COUNTRY CODE
2	CSC	Char	1	CONTROL SOURCE CODE
5	DATE	Num	4	MONYY7. Date of Observation
3	PARTNER	Char	3	PARTNER COUNTRY CODE
4	VERSION	Char	1	VERSION CODE
6	alphmkt	Num	5	F__AA: Market Rate Conversion Factor Used in Alpha Test
7	charmkt	Num	5	F__AC: Market Rate Conversion Used in Charlie Test

Notice that even though you changed the names of F__AA and F__AC to alphmkt and charmkt, respectively, you still use their old names in the KEEP and LABEL statements because renaming takes place at the output stage.

Changing the Lengths of Numeric Variables

The length attribute indicates the number of bytes the SAS System uses for storing the values of variables in output data sets. Therefore, the shorter the variable lengths, the more efficient the disk-space usage. However, there is a trade-off. The lengths of numeric variables are closely tied to their precision, and reducing their lengths arbitrarily can cause precision loss.

The DATASOURCE procedure uses default lengths for series variables appropriate to each file type. For example, the default lengths for numeric variables are 5 for IMFIFSP type files. In some cases, however, you may want to assign different lengths. Assigning lengths less than the defaults reduces memory and disk-space usage at the expense of precision. Specifying lengths longer than the defaults increases the precision but causes the DATASOURCE procedure to use more memory and disk space. The following statements define a default length of 4 for all numeric variables in the IFSFILE and then assign a length of 6 to the exchange rate index. Output is shown in [Figure 12.7](#) and [Figure 12.8](#).

```
filename ifsfile "%sysget(DATASRC_DATA)imfifs1.dat" RECFM=F LRECL=88;

proc datasource filetype=imfifsp infile=ifsfile
    interval=month
    out=market outcont=mrktvars;
  where country in ('112','146','158') and partner=' ';
  keep f__aa f__ac;
  range from '01jun85'd to '01feb86'd;
  rename f__aa=alphmkt f__ac=charmkt;
  label f__aa='F__AA: Market Rate Conversion Factor Used in Alpha Test'
        f__ac='F__AC: Market Rate Conversion Used in Charlie Test';
  length _numeric_ 4;
  length f__aa 6;
run;

title1 'Printout of OUTCONT= Showing New NAMES and LABELs';
proc print data=mrktvars ;
  var name label length;
run;

title1 'Contents of OUT= Showing New NAMES and LABELs';
proc contents data=market;
run;
```

Figure 12.7 Changing the Lengths of Numeric Variables

Printout of OUTCONT= Showing New NAMES and LABELs			
Obs	NAME	LABEL	LENGTH
1	alphmkt	F__AA: Market Rate Conversion Factor Used in Alpha Test	6
2	charmkt	F__AC: Market Rate Conversion Used in Charlie Test	4

Figure 12.8 Changing the Lengths of Numeric Variables

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	COUNTRY	Char	3	COUNTRY CODE
2	CSC	Char	1	CONTROL SOURCE CODE
5	DATE	Num	4	MONYY7. Date of Observation
3	PARTNER	Char	3	PARTNER COUNTRY CODE
4	VERSION	Char	1	VERSION CODE
6	alphmkt	Num	6	F____AA: Market Rate Conversion Factor Used in Alpha Test
7	charmkt	Num	4	F____AC: Market Rate Conversion Used in Charlie Test

The default lengths of the character variables are set to the minimum number of characters that can hold the longest possible value.

Syntax: DATASOURCE Procedure

The DATASOURCE procedure uses the following statements:

```

PROC DATASOURCE options ;
  KEEP variable-list ;
  DROP variable-list ;
  KEEPEVENT event-list ;
  DROPEVENT event-list ;
  WHERE where-expression ;
  RANGE FROM from TO to ;
  ATTRIBUTE variable-list attribute-list ... ;
  FORMAT variable-list format ... ;
  LABEL variable="label" ... ;
  LENGTH variable-list length ... ;
  RENAME old-name=new-name ... ;

```

The PROC DATASOURCE statement is required. All the rest of the statements are optional.

The DATASOURCE procedure uses two kinds of statements, subsetting statements and attribute statements. Subsetting statements provide selection of time series data over selected time periods and cross sections from the input data file. Attribute statements control the attributes of the variables in the output SAS data set.

The subsetting statements are the KEEP, DROP, KEEPEVENT, and DROPEVENT statements (which select output variables); the RANGE statement (which selects time ranges); and the WHERE statement (which selects cross sections). The attribute statements are the ATTRIBUTE, FORMAT, LABEL, LENGTH, and RENAME statements.

The statements and options used by PROC DATASOURCE are summarized in [Table 12.3](#).

Table 12.3 Summary of Syntax

Option	Description
Input Data File Options	
FILETYPE=	type of input data file to read
INFILE=	fileref(s) of the input data
LRECL=	lrecl(s) of the input data
RECFM=	recfm(s) of the input data
ASCII	character set of the incoming data
EBCDIC	character set of the incoming data
Output Data Set Options	
OUT=	write the extracted time series data
OUTALL=	information on time series and cross sections
OUTBY=	information on only cross sections
OUTCONT=	information on only time series variables
OUTEVENT=	write event-oriented data
OUTSELECT=	control reporting of all or only selected series and cross sections
INDEX	create single indexes from BY variables for the OUT= data set
ALIGN=	control the alignment of SAS date values
Subsetting Option and Statements	
INTERVAL=	select periodicity of series to extract
KEEP	time series to include in the OUT= data set
DROP	time series to exclude from the OUT= data set
KEEPEVENT	events to include in the OUTEVENT= data set
DROPEVENT	events to exclude from the OUTEVENT= data set
WHERE	select cross sections for output
RANGE	time range of observations to be output
Assigning Attributes Options and Statements	
FORMAT	assign formats to variables in the output data sets
ATTRIBUTE FORMAT=	assign formats to variables in the output data sets
LABEL	assign labels to variables in the output data sets
ATTRIBUTE LABEL=	assign labels to variables in the output data sets
LENGTH	control the lengths of variables in the output data sets
ATTRIBUTE LENGTH=	control the lengths of variables in the output data sets
RENAME	assign new names to variables in the output data sets

PROC DATASOURCE Statement

PROC DATASOURCE *options* ;

The following options can be used in the PROC DATASOURCE statement:

ALIGN= *option*

controls the alignment of SAS dates used to identify output observations. The ALIGN= option allows the following values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. BEGINNING is the default.

ASCII

specifies the incoming data is ASCII. This option is used when the native character set of your host machine is EBCDIC.

DBNAME= 'database name'

specifies the FAME database to access. Only use this option with the filetype=FAME option. The character string you specify in the DBNAME= option is passed through to FAME. Specify the value of this option as you would in accessing the database from within FAME software.

EBCDIC

specifies the incoming data is ebcdic. This option is needed when the native character set of your host machine is ASCII.

FAMEPRINT

prints the FAME command file generated by PROC DATASOURCE and the log file produced by the FAME component of the interface system. Only use this option with the filetype=FAME option.

FILETYPE= entry**DBTYPE= dbtype**

specifies the kind of input data file to process. See “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632 for a list of supported file types. The FILETYPE= option is required.

INDEX

creates a set of single indexes from BY variables for the OUT= data set. Under some circumstances, creating indexes for a SAS data set may increase the efficiency in locating observations when BY or WHERE statements are used in subsequent steps. Refer to *SAS Language Reference: Concepts* for more information on SAS indexes. The INDEX option is ignored when no OUT= data set is created or when the data file does not contain any BY variables. The INDEX= data set option can be used to override the index variable definitions.

INFILE= fileref**INFILE= (fileref1 fileref2 ... filrefn)**

specifies the *fileref* assigned to the input data file. The default value is DATAFILE. The fileref used in the INFILE= option (or if no INFILE= option is specified, the fileref DATAFILE) must be associated with the physical data file in a FILENAME statement. (On some operating systems, the fileref assignment can be made with the system's control language, and a FILENAME statement may not be needed. Refer to *SAS Statements: Reference* for more details on the FILENAME statement. Physical data files can reside on DVD, CD-ROM, or other media.

For some file types, the data are distributed over several files. In this case, the INFILE= option is required, and it lists in parentheses the filerefs for each of the files making up the database. The order in which these FILEREFS are listed is important and must conform to the specifics of each file type as explained in “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632.

LRECL= lrecl**LRECL= (lrecl1 lrecl2 ... lrecln)**

The logical record length in bytes of the infile. Only use this if you need to override the default LRECL of the file. For some file types, the data are distributed over several files. In this case, the LRECL= option lists in parentheses the LRECLs for each of the files making up the database. The

order in which these LRECLs are listed is important and must conform to the specifics of each file type as explained in “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632.

RECFM= *recfm*

RECFM= (*recfm1 recfm2 ... recfmn*)

The record format of the infile. Only use this if you need to override the default record format of the file. For some file types, the data are distributed over several files. In this case, the RECFM= option lists in parentheses the RECFMs for each of the files making up the database. The order in which these RECFMs are listed is important and must conform to the specifics of each file type as explained in “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632. The possible values of RECFM are

- F or FIXED for fixed length records
- N or BIN for binary records
- D or VAR for varying length records
- U or DEF for host default record format
- DOM_V or DOMAIN_VAR or BIN_V or BIN_VAR for UNIX binary record format

INTERVAL= *interval*

FREQUENCY= *interval*

TYPE= *interval*

specifies the periodicity of series selected for output to the OUT= data set. The OUT= data set created by PROC DATASOURCE can contain only time series with the same periodicity. Some data files contain time series with different periodicities; for example, a file can contain both monthly series and quarterly series. Use the INTERVAL= option to indicate which periodicity you want. If you want to extract series with different periodicities, use different PROC DATASOURCE invocations with the desired INTERVAL= options.

Common values for INTERVAL= are YEAR, QUARTER, MONTH, WEEK, and DAY. The values allowed, as well as the default value of the INTERVAL= option, depend on the file type. See “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632 for the INTERVAL= values appropriate to the data file type you are reading.

OUT= *SAS-data-set*

names the output data set for the time series extracted from the data file. If none of the output data set options are specified, including the OUT= data set itself, an OUT= data set is created and named according to the DATA*n* convention. However, when you create any of the other output data sets, such as OUTCONT=, OUTBY=, OUTALL=, or OUTEVENT=, you must explicitly specify the OUT= data set; otherwise, it will not be created. See “[OUT= Data Set](#)” on page 627 for further details.

OUTALL= *SAS-data-set*

writes information on the contents of the input data file to an output data set. The OUTALL= data set includes descriptive information, time ranges, and observation counts for all the time series within each BY group. By default, no OUTALL= data set is created.

The OUTALL= data set contains the Cartesian product of the information output by the OUTCONT= and OUTBY= options. In data files for which there are no cross sections, the OUTALL= and OUTCONT= data sets are almost equivalent, except that OUTALL= data set also reports time ranges and observation counts of series. See “[OUTALL= Data Set](#)” on page 630 for further details.

OUTBY= SAS-data-set

writes information on the BY variables to an output data set. The OUTBY= data set contains the list of cross sections in the database delimited by the unique set of values that the BY variables assume. Unless the OUTSELECT=OFF option is present, only the selected BY groups are written to the OUTBY= data set. If you omit the OUTBY= option, no OUTBY= data set is created. See “[OUTBY= Data Set](#)” on page 629 for further details.

OUTCONT= SAS-data-set

writes information on the contents of the input data file to an output data set. By default, the OUTCONT= data set includes descriptive information on all of the unique series of the selected periodicity in the data file. When the OUTSELECT=OFF option is omitted, the OUTCONT= data set includes observations only for the series selected for output to the OUT= data set. By default, no OUTCONT= data set is created. See “[OUTCONT= Data Set](#)” on page 628 for further details.

OUTEVENT= SAS-data-set

names the output data set to output event-oriented time series data. This option can only be used when CRSP stock files are being processed. For all other file types, it will be ignored. See “[OUTEVENT= Data Set](#)” on page 631 for further details.

OUTSELECT= ON | OFF

determines whether to output all observations (OUTSELECT=OFF) or only those corresponding to the selected time series and selected BY groups (OUTSELECT=ON) to OUTCONT=, OUTBY=, and OUTALL= data sets. The default is OUTSELECT=ON. The OUTSELECT= option is only relevant when any one of the auxiliary data sets is specified. The option writes observations to OUTCONT=, OUTBY=, and OUTALL= data sets for only the selected time series and selected BY groups if it is set ON. The OUTSELECT= option is only relevant when any one of the OUTCONT=, OUTBY=, and OUTALL= options is specified. The default is OUTSELECT=ON.

KEEP Statement

KEEP variable-list ;

The KEEP statement specifies which variables in the data file are to be included in the OUT= data set. Only the time series and event variables can be specified in a KEEP statement. All the BY variables and the time ID variable DATE are always included in the OUT= data set; they cannot be referenced in a KEEP statement. If they are referenced, a warning message is given and the reference is ignored.

The variable list can contain variable names or name range specifications. See “[Variable Lists](#)” on page 626 for details.

There is a default KEEP list for each file type. Usually, descriptor type variables, like footnotes, are not included in the default KEEP list. If you give a KEEP statement, the default list becomes undefined.

Only one KEEP or one DROP statement can be used. KEEP and DROP are mutually exclusive.

You can also use the KEEP= data set option to control which variables to include in the OUT= data set. However, the KEEP statement differs from the KEEP= data set option in several respects:

- The KEEP statement selection is applied before variables are read from the data file, while the KEEP= data set option selection is applied after variables are read and as they are written to the OUT= data set. Therefore, using the KEEP statement instead of the KEEP= data set option is much more efficient.
- If the KEEP statement causes no series variables to be selected, then no observations are output to the OUT= data set.
- The KEEP statement variable specifications are applied to each cross section independently. This behavior may produce variables different from those produced by the KEEP= data set option when order-range variable list specifications are used.

DROP Statement

DROP *variable-list* ;

The DROP statement specifies that some variables be excluded from the OUT= data set. Only the time series and event variables can be specified in a DROP statement. None of the BY variables or the time ID variable DATE can be excluded from the OUT= data set. If they are referenced in a DROP statement, a warning message is given and the reference is ignored. Use the WHERE statement for selection based on BY variables, and use the RANGE statement for date selections.

The variable list can contain variable names or name range specifications. See “[Variable Lists](#)” on page 626 for details.

Only one DROP or one KEEP statement can be used. KEEP and DROP are mutually exclusive.

There is a default DROP or KEEP list for each file type. Usually, descriptor type variables, like footnotes, are not included in the default KEEP list. If you specify a DROP statement, the default list becomes undefined.

You can also use the DROP= data set option to control which variables to exclude from the OUT= data set. However, the DROP statement differs from the DROP= data set option in several aspects:

- The DROP statement selection is applied before variables are read from the data file, while the DROP= data set option selection is applied after variables are read and as they are written to the OUT= data set. Therefore, using the DROP statement instead of the DROP= data set option is much more efficient.
- If the DROP statement causes all series variables to be excluded, then no observations are output to the OUT= data set.
- The DROP statement variable specifications are applied to each cross section independently. This behavior may produce variables different from those produced by the DROP= data set option when order-range variable list specifications are used.

KEEPEVENT Statement

KEEPEVENT *variable-list* ;

The KEEPEVENT statement specifies which event variables in the data file are to be included in the OUTEVENT= data set. As a result, the KEEPEVENT statement is valid only for data files containing event-oriented time series data. All the BY variables, the time ID variable DATE, and the event-grouping variable EVENT are always included in the OUTEVENT= data set. These variables cannot be referenced in the KEEPEVENT statement. If any of these variables are referenced, a warning message is given and the reference is ignored.

The variable list can contain variable names or name range specifications. See “[Variable Lists](#)” on page 626 for details.

Only one KEEPEVENT or one DROPEVENT statement can be used. KEEPEVENT and DROPEVENT are mutually exclusive.

You can also use the KEEP= data set option to control which event variables to include in the OUTEVENT= data set. However, the KEEPEVENT statement differs from the KEEP= data set option in several respects:

- The KEEPEVENT statement selection is applied before variables are read from the data file, while the KEEP= data set option selection is applied after variables are read and as they are written to the OUTEVENT= data set. Therefore, using the KEEPEVENT statement instead of the KEEP= data set option is much more efficient.
- If the KEEPEVENT statement causes no event variables to be selected, then no observations are output to the OUTEVENT= data set.

DROPEVENT Statement

DROPEVENT *variable-list* ;

The DROPEVENT statement specifies that some event variables be excluded from the OUTEVENT= data set. As a result, the DROPEVENT statement is valid only for data files containing event-oriented time series data. All the BY variables, the time ID variable DATE, and the event-grouping variable EVENT are always included in the OUTEVENT= data set. These variables cannot be referenced in the DROPEVENT statement. If any of these variables are referenced, a warning message is given and the reference is ignored.

The variable list can contain variable names or name range specifications. See “[Variable Lists](#)” on page 626 for details.

Only one DROPEVENT or one KEEPEVENT statement can be used. DROPEVENT and KEEPEVENT are mutually exclusive.

You can also use the DROP= data set option to control which event variables to exclude from the OUTEVENT= data set. However, the DROPEVENT statement differs from the DROP= data set option in several respects:

- The DROPEVENT statement selection is applied before variables are read from the data file, while the DROP= data set option selection is applied after variables are read and as they are written to the OUTEVENT= data set. Therefore, using the DROPEVENT statement instead of the DROP= data set option is much more efficient.
- If the DROPEVENT statement causes all series variables to be excluded, then no observations are output to the OUTEVENT= data set.

WHERE Statement

WHERE *where-expression* ;

The WHERE statement specifies conditions that BY variables must satisfy in order for a cross section to be included in the OUT= and OUTEVENT= data sets. By default, all BY groups are selected.

The *where-expression* must refer only to BY variables defined for the file type you are reading. The “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632 lists the names of the BY variables for each file type.

For example, DOTS (Direction of Trade Statistics) files, distributed by the International Monetary Fund, have four BY variables: COUNTRY, CSC, PARTNER, and VERSION. Both COUNTRY and PARTNER are three-digit country codes. To select the direction of trade statistics of the United States (COUNTRY='111') with Turkey (COUNTRY='186'), Japan (COUNTRY='158'), and the oil exporting countries group (COUNTRY='985'), you should specify

```
where country='111' and partner in ('186','158','985');
```

You can use any SAS language operators and special WHERE expression operators in the WHERE statement condition. Refer to *SAS Language Reference: Concepts* for a more detailed discussion of WHERE expressions.

If you want to see the names of the BY variables and the values they assume for each cross section, you can first run PROC DATASOURCE with only the OUTBY= option. The information contained in the OUTBY= data set will aid you in selecting the appropriate BY groups for subsequent PROC DATASOURCE steps.

RANGE Statement

RANGE FROM *from* **TO** *to* ;

The RANGE statement selects the time range of observations written to the OUT= and OUTEVENT= data sets. The *from* and *to* values can be SAS date, time, or datetime constants, or they can be specified as *year* or *year : period*, where *year* is a two-digit or four-digit year, and *period* (when specified) is a period within the year corresponding to the INTERVAL= option. (For example, if INTERVAL=QTR, then *period* refers to quarters.) When *period* is omitted, the beginning of the year is assumed for the *from* value, and the end of the year is assumed for the *to* value.

If a two-digit year is specified, PROC DATASOURCE uses the current value of the YEARCUTOFF option to determine the century of your data. Warnings are issued in the SAS log whenever DATASOURCE needs to determine the century from a two-digit year specification.

The default YEARCUTOFF value is 1920. To use a different YEARCUTOFF value, specify

```
options yearcutoff=yyyy;
```

where YYYY is the YEARCUTOFF value you want to use. See *SAS System Options: Reference* for a more detailed discussion of the YEARCUTOFF option.

Both the FROM and TO specifications are optional, and both the FROM and TO keywords are optional. If the FROM limit is omitted, the output observations start with the minimum date for which data are available for any selected series. Similarly, if the TO limit is omitted, the output observations end with the maximum date for which data are available.

The following are some examples of RANGE statements:

```
range from 1980 to 1990;
range 1980 - 1990;
range from 1980;
range 1980;
range to 1990;
range to 1990:2;
range from '31aug89'd to '28feb1990'd;
```

The RANGE statement applies to each BY group independently. If all the selected series contain no data in the specified range for a given BY group, then there will be no observations for that BY group in the OUT= and OUTEVENT= data sets.

If you want to know the time ranges for which periodic time series data are available, you can first run PROC DATASOURCE with the OUTBY= or OUTALL= option. The OUTBY= data set reports the union of the time ranges over all the series within each BY group, while the OUTALL= data set gives time ranges for each series separately in each BY group.

ATTRIBUTE Statement

ATTRIBUTE *variable-list attribute-list* ... ;

The ATTRIBUTE statement assigns formats, labels, and lengths to variables in the output data sets.

The *variable-list* can contain variable names and variable name range specifications. See “[Variable Lists](#)” on page 626 for details. The attributes specified in the following attribute list apply to all variables in the variable list.

An *attribute-list* consists of one or more of the following options:

FORMAT= *format*

associates a format with variables in *variable-list*. The *format* can be either a standard SAS format or a format defined with the FORMAT procedure. The default formats for variables depend on the file type.

LABEL= *"label"*

assigns a label to the variables in the variable list. The default labels for variables depend on the file type. Labels can be up to 256 bytes in length.

LENGTH= *length*

specifies the number of bytes used to store the values of variables in the variable list. The default lengths for numeric variables depend on the file type. Usually default lengths are set to 5 bytes.

The length specification also controls the amount of memory that PROC DATASOURCE uses to hold variable values while processing the input data file. Thus, specifying a LENGTH= value smaller than the default will reduce both the disk space taken up by the output data sets and the amount of memory used by the PROC DATASOURCE step, at the cost of precision of output data values.

FORMAT Statement

FORMAT *variable-list format* ... ;

The FORMAT statement assigns formats to variables in output data sets. The *variable-list* can contain variable names and variable name range specifications. See “[Variable Lists](#)” on page 626 for details. The format specified applies to all variables in the variable list.

A single FORMAT statement can assign the same format to several variables or different formats to different variables. The FORMAT statement can use standard SAS formats or formats defined using the FORMAT procedure.

Any later format specification for a variable, using either the FORMAT statement or the FORMAT= option in the ATTRIBUTE statement, always overrides the previous one.

LABEL Statement

LABEL *variable* = "label" ... ;

The LABEL statement assigns SAS variable labels to variables in the output data sets. You can give labels for any number of variables in a single LABEL statement. The default labels for variables depend on the file type. Extra-long labels (> 256 bytes) reside in the OUTCONT data set as the DESCRIPT variable.

Any later label specification for a variable, using either the LABEL statement or the LABEL= option in the ATTRIBUTE statement, always overrides the previous one.

LENGTH Statement

LENGTH *variable-list length* ... ;

The LENGTH statement, like the LENGTH= option in the ATTRIBUTE statement, specifies the number of bytes used to store values of variables in output data sets. The default lengths for numeric variables depend on the file type. Usually default lengths are set to 5 bytes.

The default lengths of character variables are defined as the minimum number of characters that can hold the longest possible value.

For some file types, the LENGTH statement also controls the amount of memory used to store values of numeric variables while processing the input data file. Thus, specifying LENGTH values smaller than the default will reduce both the disk space taken up by the output data sets and the amount of memory used by the PROC DATASOURCE step, at the cost of precision of output data values.

Any later length specification for a variable, using either the LENGTH statement or the LENGTH= option in the ATTRIBUTE statement, always overrides the previous one.

RENAME Statement

RENAME *old-name* = *new-name* ... ;

The RENAME statement is used to change the names of variables in the output data sets. Any number of variables can be renamed in a single RENAME statement. The most recent RENAME specification overrides any previous ones for a given variable. The *new-name* is limited to 32 characters. Renaming of variables is done at the output stage. Therefore, you need to use the old variable names in all other PROC DATASOURCE statements. For example, the series variable names DATA1-DATA350 used with annual COMPUSTAT files are not very descriptive, so you may choose to rename them to reflect the financial aspect they represent. You may rename "DATA51" as "INVESTTAX" with the RENAME statement

```
rename data51=investtax;
```

since it contains investment tax credit data. However, in all other DATASOURCE statements, you must use the old name, DATA51.

Details: DATASOURCE Procedure

Variable Lists

Variable lists used in PROC DATASOURCE statements can consist of any combination of variable names and name range specifications. Items in variable lists can have the following forms:

- a name, such as PZU.
- an alphabetic range *name1-name2*. For example, A-DZZZZZZZ specifies all variables with names starting with A, B, C, or D.
- a prefix range *prefix :*. For example, IP: selects all variables with names starting with the letters IP.
- an order range *name1-name2*. For example, GLR72–GLRD72 specifies all variables in the input data file between GLR72 and GRLD72 inclusive.
- a numeric order range *name1-NUMERIC-name2*. For example, GLR72-NUMERIC-GLRD72 specifies all numeric variables between GLR72 and GRLD72 inclusive.
- a character order range *name1-CHARACTER-name2*. For example, GLR72-CHARACTER-GLRD72 specifies all character variables between GLR72 and GRLD72 inclusive.
- one of the keywords `_NUMERIC_`, `_CHARACTER_`, or `_ALL_`. The keyword `_NUMERIC_` specifies all numeric variables, `_CHARACTER_` specifies all character variables, and `_ALL_` specifies all variables.

To determine the order of series in a data file, run PROC DATASOURCE with the OUTCONT= option, and print the output data set. Note that order and alphabetic range specifications are inclusive, meaning that the beginning and ending names of the range are also included in the variable list.

For order ranges, the names used to define the range must actually name variables in the input data file. For alphabetic ranges, however, the names used to define the range need not be present in the data file.

Note that variable specifications are applied to each cross section independently. This may cause the order-range variable list specification to behave differently than its DATA step and data set option counterparts. This is because PROC DATASOURCE knows which variables are defined for which cross sections, while the DATA step applies order range specification to the whole collection of time series variables.

If the ending variable name in an order range specification is not in the current cross section, all variables starting from the beginning variable to the last variable defined in that cross section get selected. If the first variable is not in the current cross section, then order range specification has no effect for that cross section.

The variable names used in variable list specifications can refer either to series names appearing in the input data file or to the SAS names assigned to series data fields internally if the series names are not recorded to the INFILE= file. When the latter is the case, internally defined variable names are listed in “[Data Elements Reference: DATASOURCE Procedure](#)” on page 632 later in this chapter.

The following are examples of the use of variable lists:

```
keep ip: pw112-pw117 pzu;
drop data1-data99 data151-data350;
length data1-numeric-aftnt350 ucode 4;
```

The first statement keeps all the variables starting with IP:, all the variables between PW112 and PW117 including PW112 and PW117 themselves, and a single variable PZU. The second statement drops all the variables that fall alphabetically between DATA1 and DATA99, and between DATA151 and DATA350. Finally, the third statement assigns a length of 4 bytes to all the numeric variables defined between DATA1 and AFTNT350, and UCODE. Variable lists can not exceed 200 characters in length.

OUT= Data Set

The OUT= data set can contain the following variables:

- the BY variables, which identify cross-sectional dimensions when the input data file contains time series replicated for different values of the BY variables. Use the BY variables in a WHERE statement to process the OUT= data set by cross sections. The order in which BY variables are defined in the OUT= data set corresponds to the order in which the data file is sorted.
- DATE, a SAS date-, time-, or datetime-valued variable that reports the time period of each observation. The values of the DATE variable may span different time ranges for different BY groups. The format of the DATE variable depends on the INTERVAL= option.
- the periodic time series variables, which are included in the OUT= data set only if they have data in at least one selected BY group and they are not discarded by a KEEP or DROP statement
- the event variables, which are included in the OUT= data set if they are not discarded by a KEEP or DROP statement. By default, these variables are not output to OUT= data set.

The values of BY variables remain constant in each cross section. Observations within each BY group correspond to the sampling of the series variables at the time periods indicated by the DATE variable.

You can create a set of single indexes for the OUT= data set by using the INDEX option, provided there are BY variables. Under some circumstances, this may increase the efficiency of subsequent PROC and DATA steps that use BY and WHERE statements. However, there is a cost associated with creation and maintenance of indexes. The *SAS Language Reference: Concepts* lists the conditions under which the benefits of indexes outweigh the cost.

With data files containing cross sections, there can be various degrees of overlap among the series variables. One extreme is when all the series variables contain data for all the cross sections. In this case, the output data set is very compact. In the other extreme case, however, the set of time series variables are unique for each cross section, making the output data set very sparse, as depicted in [Table 12.4](#).

Table 12.4 The OUT= Data Set Containing Unique Series for Each BY Group

BY Variables BY1 ... BYP	Series in first BY group F1 F2 F3 ... FN	Series in second BY group S1 S2 S3 ... SM	Series in last BY group T1 T2 T3 ... TK	
BY group 1	DATA is here	data is missing everywhere except on diagonal			
BY group 2	DATA is here				
⋮					DATA is here
BY group N					

The data in Table 12.4 can be represented more compactly if cross-sectional information is incorporated into series variable names.

OUTCONT= Data Set

The OUTCONT= data set contains descriptive information for the time series variables. This descriptive information includes various attributes of the time series variables. The OUTCONT= data set contains the following variables:

- NAME, a character variable that contains the series name
- KEPT, a numeric variable that indicates whether the series was selected for output by the DROP or KEEP statements. KEPT is usually the same as SELECTED, but can differ if a WHERE statement is used.
- SELECTED, a numeric variable that indicates whether the series is selected for output to the OUT= data set. The series is included in the OUT= data set (SELECTED=1) if it is kept (KEPT=1) and it has data for at least one selected BY group.
- TYPE, a numeric variable that indicates the type of the time series variable. TYPE=1 for numeric series; TYPE=2 for character series.
- LENGTH, a numeric variable that gives the number of bytes allocated for the series variable in the OUT= data set
- VARNUM, a numeric variable that gives the variable number of the series in the OUT= data set. If the series variable is not selected for output (SELECTED=0), then VARNUM has a missing value. Likewise, if no OUT= option is given, VARNUM has all missing values.

- LABEL, a character variable that contains the label of the series variable. LABEL contains only the first 256 characters of the labels. If they are longer than 256 characters, then the variable, DESCRIPT, is defined to hold the whole length of series labels. Note that if a data file assigns different labels to the same series variable within different cross sections, only the first occurrence of labels will be transferred to the LABEL column.
- the variables FORMAT, FORMATL, and FORMATD, which give the format name, length, and number of format decimals, respectively
- the GENERIC variables, whose values may vary from one series to another, but whose values remain constant across BY groups for the same series

By default, the OUTCONT= data set contains observations for only the selected series where SELECTED=1. If the OUTSELECT=OFF option is specified, the OUTCONT= data set contains one observation for each unique series of the specified periodicity contained in the input data file.

If you do not know what series are in the data file, you can run PROC DATASOURCE with the OUTCONT= option and OUTSELECT=OFF. The information contained in the OUTCONT= data set can then help you to determine which time series data you want to extract.

OUTBY= Data Set

The OUTBY= data set contains information on the cross sections contained in the input data file. These cross sections are represented as BY groups in the OUT= data set. The OUTBY= data set contains the following variables:

- the BY variables, whose values identify the different cross sections in the data file. The BY variables depend on the file type.
- BYSELECT, a numeric variable that reports the outcome of the WHERE statement condition for the BY variable values for this observation. The value of BYSELECT is 1 for BY groups selected by the WHERE statement for output to the OUT= data set and is 0 for BY groups that are excluded by the WHERE statement. BYSELECT is added to the data set only if a WHERE statement is given. When there is no WHERE statement, then all the BY groups are selected.
- ST_DATE, a numeric variable that gives the starting date for the BY group. The starting date is the earliest of the starting dates of all the series that have data for the current BY group.
- END_DATE, a numeric variable that gives the ending date for the BY group. The ending date is the latest of the ending dates of all the series that have data for the BY group.
- NTIME, a numeric variable that gives the number of time periods between ST_DATE and END_DATE, inclusive. Usually, this is the same as NOBS, but they differ when time periods are not equally spaced and when the OUT= data set is not specified. NTIME is a maximum limit on NOBS.

- NOBS, a numeric variable that gives the number of time series observations in the OUT= data set between ST_DATE and END_DATE inclusive. When a given BY group is discarded by a WHERE statement, the NOBS variable corresponding to this BY group becomes 0, since the OUT= data set does not contain any observations for this BY group. Note that BYSELECT=0 for every discarded BY group.
- NINRANGE, a numeric variable that gives the number of observations in the range (*from,to*) defined by the RANGE statement. This variable is only added to the OUTBY= data set when the RANGE statement is specified.
- NSERIES, a numeric variable that gives the total number of unique time series variables having data for the BY group
- NSELECT, a numeric variable that gives the total number of selected time series variables having data for the BY group
- the generic variables, whose values remain constant for all the series in the current BY group

In this list, you can only control the attributes of the BY and GENERIC variables.

The variables NOBS, NTIME, and NINRANGE give observation counts, while the variables NSERIES and NSELECT give series counts.

By default, observations for only the selected BY groups (where BYSELECT=1) are output to the OUTBY= data set, and the date and time range variables are computed over only the selected time series variables. If the OUTSELECT=OFF option is specified, the OUTBY= data set contains an observation for each BY group, and the date and time range variables are computed over all the time series variables.

For file types that have no BY variables, the OUTBY= data set contains one observation giving ST_DATE, END_DATE, NTIME, NOBS, NINRANGE, NSERIES, and NSELECT for all the series in the file.

If you do not know the BY variable names or their possible values, you can do an initial run of PROC DATASOURCE with the OUTBY= option. The information contained in the OUTBY= data set can help you design your WHERE expression and RANGE statement for the subsequent executions of PROC DATASOURCE to obtain different subsets of the same data file.

OUTALL= Data Set

The OUTALL= data set combines and expands the information provided by the OUTCONT= and OUTBY= data sets. That is, the OUTALL= data set not only reports the OUTCONT= information separately for each BY group, but also reports the OUTBY= information separately for each series. Each observation in the OUTBY= data set gets expanded to NSERIES or NSELECT observations in the OUTALL= data set, depending on whether the OUTSELECT=OFF option is specified.

By default, only the selected BY groups and series are included in the OUTALL= data set. If the OUTSELECT=OFF option is specified, then all the series within all the BY groups are reported.

The OUTALL= data set contains all the variables defined in the OUTBY= and OUTCONT= data sets and also contains the GENERIC variables (whose values can vary from one series to another and from one BY

group to another). Another additional variable is BLKNUM, which gives the data block number in the data file containing the series variable.

The OUTALL= data set is useful when BY groups do not contain the same time series variables or when the time ranges for series change across BY groups.

You should be careful in using the OUTALL= option, since the OUTALL= data set can get very large for many file types. Some file types have the same series and time ranges for each BY group; the OUTALL= option should not be used with these file types. For example, you should not specify the OUTALL= option with COMPUSTAT files, since all the BY groups contain the same series variables.

The OUTALL= and OUTCONT= data sets are equivalent when there are no BY variables, except that the OUTALL= data set contains extra information about the time ranges and observation counts of the series variables.

OUTEVENT= Data Set

The OUTEVENT= data set is used to output event-oriented time series data. Events occurring at discrete points in time are recorded along with the date they occurred. Only CRSP stock files contain event-oriented time series data. For all other types of files, the OUTEVENT= option is ignored.

The OUTEVENT= data set contains the following variables:

- the BY variables, which identify cross-sectional dimensions when the input data file contains time series replicated for different values of the BY variables. Use the BY variables in a WHERE statement to process the OUTEVENT= data set by cross sections. The order in which BY variables are defined in the OUTEVENT= data set corresponds to the order in which the data file is sorted.
- DATE, a SAS date-, time- or datetime-valued variable that reports the discrete time periods at which events occurred. The format of the DATE variable depends on the INTERVAL= option, and should accurately report the date based on the SAS YEARCUTOFF option. The default value for YEARCUTOFF is 1920. The dates used can span up to 250 years.
- EVENT, a character variable that contains the event group name. The EVENT variable is another cross-sectional variable.
- the event variables, which are included in the OUTEVENT= data set only if they have data in at least one selected BY group, and are not discarded by a KEEPEVENT or DROPEVENT statement

Note that each event group contains a nonoverlapping set of event variables; therefore, the OUTEVENT= data set is very sparse. You should exercise care when selecting event variables to be included in the OUTEVENT= data set.

Also note that even though the OUTEVENT= data set cannot contain any periodic time series variables, the OUT= data set can contain event variables if they are explicitly specified in a KEEP statement. In summary, you can specify event variables in a KEEP statement, but you cannot specify periodic time series variables in a KEEPEVENT statement.

While variable selection for OUT= and OUTEVENT= data sets are controlled by a different set of statements (KEEP versus KEEPEVENT or DROP versus DROPEVENT), cross-section and range selections are controlled by the same statements, so in summary, the WHERE and the RANGE statements are effective for both output data sets.

Data Elements Reference: DATASOURCE Procedure

PROC DATASOURCE can process only certain kinds of data files. For certain time series databases, the DATASOURCE procedure has built-in information on the layout of files composing the database. PROC DATASOURCE knows how to read only these kinds of data files. To access these databases, you must indicate the data file type in the FILETYPE= option. For more detailed information, see the corresponding document for each filetype. (See “References” on page 687.) The currently supported file types are summarized in Table 12.5.

Table 12.5 Supported File Types

Supplier	FILETYPE=	Description
BEA	BEANIPA	National Income and Product Accounts
	BEANIPAD	National Income and Product Accounts PC Format
BLS	BLSCPI	Consumer Price Index Surveys
	BLSWPI	Producer Price Index Survey
	BLSEENA	National Employment, Hours, and Earnings Survey
	BLSEESA	State and Area Employment, Hours, and Earnings Survey
GLOBAL INSIGHT (DRI) (DRI)	DRIBASIC	Basic Economic (formerly CITIBASE) Data Files
	CITIBASE	CITIBASE Data Files
	DRIDDS	DRI Data Delivery Service Time Series
	CITIDISK	PC Format CITIBASE Databases
CRSP	CRY2DBS	Y2K Daily Binary Security File Format
	CRY2DBI	Y2K Daily Binary Calendar&Indices File Format
	CRY2DBA	Y2K Daily Binary File Annual Data Format
	CRY2MBS	Y2K Monthly Binary Security File Format
	CRY2MBI	Y2K Monthly Binary Calendar&Indices File Format
	CRY2MBA	Y2K Monthly Binary File Annual Data Format
	CRY2DCS	Y2K Daily Character Security File Format
	CRY2DCI	Y2K Daily Character Calendar&Indices File Format
	CRY2DCA	Y2K Daily Character File Annual Data Format
	CRY2MCS	Y2K Monthly Character Security File Format
	CRY2MCI	Y2K Monthly Character Calendar&Indices File Format
	CRY2MCA	Y2K Monthly Character File Annual Data Format
	CRY2DIS	Y2K Daily IBM Binary Security File Format
	CRY2DII	Y2K Daily IBM Binary Calendar&Indices File Format
	CRY2DIA	Y2K Daily IBM Binary File Annual Data Format
	CRY2MIS	Y2K Monthly IBM Binary Security File Format
	CRY2MII	Y2K Monthly IBM Binary Calendar&Indices File Format
	CRY2MIA	Y2K Monthly IBM Binary File Annual Data Format
	CRY2MVS	Y2K Monthly VAX Binary Security File Format

Table 12.5 *continued*

Supplier	FILETYPE=	Description
CRSP	CRY2MVI	Y2K Monthly VAX Binary Calendar&Indices File Format
	CRY2MVA	Y2K Monthly VAX Binary File Annual Data Format
	CRY2DVS	Y2K Daily VAX Binary Security File Format
	CRY2DVI	Y2K Daily VAX Binary Calendar&Indices File Format
	CRY2DVA	Y2K Daily VAX Binary File Annual Data Format
	CRSPDBS	CRSP Daily Binary Security File Format
	CRSPDBI	CRSP Daily Binary Calendar&Indices File Format
	CRSPDBA	CRSP Daily Binary File Annual Data Format
	CRSPMBS	CRSP Monthly Binary Security File Format
	CRSPMBI	CRSP Monthly Binary Calendar&Indices File Format
	CRSPMBA	CRSP Monthly Binary File Annual Data Format
	CRSPDCS	CRSP Daily Character Security File Format
	CRSPDCI	CRSP Daily Character Calendar&Indices File Format
	CRSPDCA	CRSP Daily Character File Annual Data Format
	CRSPMCS	CRSP Monthly Character Security File Format
	CRSPMCI	CRSP Monthly Character Calendar&Indices File Format
	CRSPMCA	CRSP Monthly Character File Annual Data Format
	CRSPDIS	CRSP Daily IBM Binary Security File Format
	CRSPDII	CRSP Daily IBM Binary Calendar&Indices File Format
	CRSPDIA	CRSP Daily IBM Binary File Annual Data Format
	CRSPMIS	CRSP Monthly IBM Binary Security File Format
	CRSPMII	CRSP Monthly IBM Binary Calendar&Indices File Format
	CRSPMIA	CRSP Monthly IBM Binary File Annual Data Format
	CRSPMVS	CRSP Monthly VAX Binary Security File Format
	CRSPMVI	CRSP Monthly VAX Binary Calendar&Indices File Format
	CRSPMVA	CRSP Monthly VAX Binary File Annual Data Format
	CRSPDVS	CRSP Daily VAX Binary Security File Format
	CRSPDVI	CRSP Daily VAX Binary Calendar&Indices File Format
	CRSPDVA	CRSP Daily VAX Binary File Annual Data Format
	CRSPMUS	CRSP Monthly UNIX Binary Security File Format
		or utility dump of CRSPAccess Monthly Security File Format
	CRSPMUI	CRSP Monthly UNIX Binary Calendar&Indices File Format
		or utility dump of CRSPAccess Monthly Cal&Indices Format
	CRSPMUA	CRSP Monthly UNIX Binary File Annual Data Format
		or utility dump of CRSPAccess Monthly Annual Data Format
	CRSPDUS	CRSP Daily UNIX Binary Security File Format
		or utility dump of CRSPAccess Daily Security Format
	CRSPDUI	CRSP Daily UNIX Binary Calendar&Indices File Format
		or utility dump of CRSPAccess Daily Calendar&Indices Format
	CRSPDUA	CRSP Daily UNIX Binary File Annual Data Format
		or utility dump of CRSPAccess Daily Annual Data Format
CRSP	CRSPMOS	CRSP Monthly Old Character Security File Format
	CRSPMOI	CRSP Monthly Old Character Calendar&Indices File Format
	CRSPMOA	CRSP Monthly Old Character File Annual Data Format
	CRSPDOS	CRSP Daily Old Character Security File Format

Table 12.5 *continued*

Supplier	FILETYPE=	Description
	CRSPDOI	CRSP Daily Old Character Calendar&Indices File Format
	CRSPDOA	CRSP Daily Old Character File Annual Data Format
	CR95MIS	CRSP 1995 Monthly IBM Binary Security File Format
	CR95MII	CRSP 1995 Monthly IBM Binary Calendar&Indices File Format
	CR95MIA	CRSP 1995 Monthly IBM Binary File Annual Data Format
	CR95DIS	CRSP 1995 Daily IBM Binary Security File Format
	CR95DII	CRSP 1995 Daily IBM Binary Calendar&Indices File Format
	CR95DIA	CRSP 1995 Daily IBM Binary File Annual Data Format
	CR95MVS	CRSP 1995 Monthly VAX Binary Security File Format
	CR95MVI	CRSP 1995 Monthly VAX Binary Calendar&Indices File Format
	CR95MVA	CRSP 1995 Monthly VAX Binary File Annual Data Format
	CR95DVS	CRSP 1995 Daily VAX Binary Security File Format
	CR95DVI	CRSP 1995 Daily VAX Binary Calendar&Indices File Format
	CR95DVA	CRSP 1995 Daily VAX Binary File Annual Data Format
	CR95MUS	CRSP 1995 Monthly UNIX Binary Security File Format
	CR95MUI	CRSP 1995 Monthly UNIX Binary Calendar&Indices File Format
	CR95MUA	CRSP 1995 Monthly UNIX Binary File Annual Data Format
	CR95DUS	CRSP 1995 Daily UNIX Binary Security File Format
	CR95DUI	CRSP 1995 Daily UNIX Binary Calendar&Indices File Format
	CR95DUA	CRSP 1995 Daily UNIX Binary File Annual Data Format
	CR95MSS	CRSP 1995 Monthly VMS Binary Security File Format
	CR95MSI	CRSP 1995 Monthly VMS Binary Calendar&Indices File Format
	CR95MSA	CRSP 1995 Monthly VMS Binary File Annual Data Format
	CR95DSS	CRSP 1995 Daily VMS Binary Security File Format
	CR95DSI	CRSP 1995 Daily VMS Binary Calendar&Indices File Format
	CR95DSA	CRSP 1995 Daily VMS Binary File Annual Data Format
	CR95MAS	CRSP 1995 Monthly ALPHA Binary Security File Format
	CR95MAI	CRSP 1995 Monthly ALPHA Binary Calendar&Indices Format
	CR95MAA	CRSP 1995 Monthly ALPHA Binary File Annual Data Format
	CR95DAS	CRSP 1995 Daily ALPHA Binary Security File Format
	CR95DAI	CRSP 1995 Daily ALPHA Binary Calendar&Indices File Format
	CR95DAA	CRSP 1995 Daily ALPHA Binary File Annual Data Format
FAME	FAME	FAME Information Services Databases
HAVER	HAVER	Haver Analytics Data Files
IMF	IMFIFSP	International Financial Statistics, Packed Format
	IMFDOTSP	Direction of Trade Statistics, Packed Format
	IMFBOPSP	Balance of Payment Statistics, Packed Format
	IMFGFSP	Government Finance Statistics, Packed Format
OECD	OECDANA	OECD Annual National Accounts Format
	OECDQNA	OECD Quarterly National Accounts Format
	OECDMEI	OECD Main Economic Indicators Format
S&P	CSAIBM	COMPUSTAT Annual, IBM 360&370 Format
	CS48QIBM	COMPUSTAT 48 Quarter, IBM 360&370 Format
	CSAUC	COMPUSTAT Annual, Universal Character Format

Table 12.5 *continued*

Supplier	FILETYPE=	Description
	CS48QUC	COMPUSTAT 48 Quarter, Universal Character Format
	CSAIY2	Y2K COMPUSTAT Annual, IBM 360&370 Format
	CSQIY2	Y2K COMPUSTAT 48 Quarter, IBM 360&370 Format
	CSAUCY2	Y2K COMPUSTAT Annual, Universal Character Format
	CSQUCY2	Y2K COMPUSTAT 48 Quarter, Universal Character Format

Data supplier abbreviations used in Table 12.5 are summarized in Table 12.6.

Table 12.6 Data Supplier Abbreviations

Abbreviation	Supplier
BEA	Bureau of Economic Analysis, U.S. Department of Commerce
BLS	Bureau of Labor Statistics, U.S. Department of Labor
CRSP	Center for Research in Security Prices
DRI	Global Insight (formerly DRI/McGraw-Hill)
FAME	FAME Information Services, Inc.
GLOBAL INSIGHT	Global Insight, Inc.
HAVER	Haver Analytics Inc.
IMF	International Monetary Fund
OECD	Organization for Economic Cooperation and Development
S&P	Standard & Poor's Compustat Services Inc.

BEA Data Files

The Bureau of Economic Analysis, U.S. Department of Commerce, supplies national income, product accounting, and various other macroeconomic data at the regional, national, and international levels in the form of data files with various formats and on various media.

The following BEA data file types are supported.

FILETYPE=BEANIPA—National Income and Product Accounts Format

Table 12.7 FILETYPE=BEANIPA—National Income and Product Accounts Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	PARTNO	Part Number of Publication, Integer Portion of the Table Number, 1–9 (character)
	TABNUM	Table Number Within Part,

Table 12.7 (BEANIPA–National Income and Product Accounts Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
		Decimal Portion of the Table Number, 1–24 (character)
Series Variables	Series variable names are constructed by concatenating table number suffix, line and column numbers within each table. An underscore (_) prefix is also added for readability.	

FILETYPE=BEANIPAD–National Income and Product Accounts PC Format

The PC format National Income and Product Accounts files contain the same information as the BEANIPA files described previously.

Table 12.8 FILETYPE=BEANIPAD–National Income and Product Accounts PC Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	PARTNO	Part Number of Publication, Integer Portion of the Table Number, 1–9 (character)
	TABNUM	Table Number Within Part, Decimal Portion of the Table Number, 1–24 (character)
Series Variables	Series variable names are constructed by concatenating table number suffix, line and column numbers within each table. An underscore (_) prefix is also added for readability.	

BLS Data Files

The Bureau of Labor Statistics, U.S. Department of Labor, compiles and distributes data on employment, expenditures, prices, productivity, injuries and illnesses, and wages.

The following BLS file types are supported.

FILETYPE=BLSCPI–Consumer Price Index Surveys (=CU,CW)**Table 12.9** FILETYPE=BLSCPI–Consumer Price Index Surveys (=CU,CW)

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR, SEMIYEAR1.6, MONTH (default)	
BY Variables	SURVEY	Survey type: CU=All Urban Consumers,

Table 12.9 (BLS CPI–Consumer Price Index SurveysFormat continued)

Metadata Field Types	Metadata Fields	Metadata Labels
		CW=Urban Wage Earners and Clerical Workers (character)
	SEASON	Seasonality: S=Seasonally adjusted, U=Unadjusted (character)
	AREA	Geographic Area (character)
	BASPTYPE	Index Base Period Type, S=Standard, A=Alternate Reference (character)
	BASEPER	Index Base Period (character)
Series Variables	Series variable names are the same as consumer item codes listed in the Series Directory shipped with the data.	
Missing Codes	A data value of 0 is interpreted as MISSING.	

FILETYPE=BLSWPI–Producer Price Index Survey (WP)**Table 12.10** FILETYPE=BLSWPI–Producer Price Index Survey (WP)

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR, MONTH (default)	
BY Variables	SEASON	Seasonality: S=Seasonally adjusted, U=Unadjusted (character)
	MAJORCOM	Major Commodity Group (character)
Sorting Order	BY SEASON MAJORCOM	
Series Variables	Series variable names are the same as commodity codes but prefixed by an underscore (_).	
Missing Codes	A data value of 0 is interpreted as MISSING.	

FILETYPE=BLSEENA–National Employment, Hours, and Earnings Survey**Table 12.11** FILETYPE=BLSEENA–National Employment, Hours, and Earnings Survey

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR, QUARTER, MONTH (default)	
BY Variables	SEASON	Seasonality: S=Seasonally adjusted, U=Unadjusted (character)
	DIVISION	Major Industrial Division (character)
	INDUSTRY	Industry Code (character)
Sorting Order	BY SEASON DIVISION INDUSTRY	
Series Variables	Series variable names are the same as data type codes prefixed by EE.	
	EE01	Total Employment

Table 12.11 (BLSEENA–National Employment, Hours, and Earnings Survey Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	EE02	Employment of Women
	EE03	Employment of Production or Nonsupervisory Workers
	EE04	Average Weekly Earnings of Production Workers
	EE05	Average Weekly Hours of Production Workers
	EE06	Average Hourly Earnings of Production Workers
	EE07	Average Weekly Overtime Hours of Production Workers
	EE40	Index of Aggregate Weekly Hours
	EE41	Index of Aggregate Weekly Payrolls
	EE47	Hourly Earnings Index; 1977 Weights; Current Dollars
	EE48	Hourly Earnings Index; 1977 Weights; Base 1977 Dollars
	EE49	Average Hourly Earnings; Base 1977 Dollars
	EE50	Gross Average Weekly Earnings; Current Dollars
	EE51	Gross Average Weekly Earnings; Base 1977 Dollars
	EE52	Spendable Average Weekly Earnings; No Dependents; Current Dollars
	EE53	Spendable Average Weekly Earnings; No Dependents; Base 1977 Dollars
	EE54	Spendable Average Weekly Earnings; 3 Dependents; Current Dollars
	EE55	Spendable Average Weekly Earnings; 3 Dependents; Base 1977 Dollars
	EE60	Average Hourly Earnings Excluding Overtime
	EE61	Index of Diffusion; 1-month Span; Base 1977
	EE62	Index of Diffusion; 3-month Span; Base 1977
	EE63	Index of Diffusion; 6-month Span; Base 1977
	EE64	Index of Diffusion; 12-month Span; Base 1977
Missing Codes	Series data values are set to MISSING when their status codes are 1.	

FILETYPE=BLSEESA–State and Area Employment, Hours, and Earnings Survey**Table 12.12** FILETYPE=BLSEESA–State and Area Employment, Hours, and Earnings Survey

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR, MONTH (default)	
BY Variables	STATE	State FIPS codes (numeric)
	AREA	Area codes (character)
	DIVISION	Major industrial division (character)

Table 12.12 (BLSEESA–State and Area Employment, Hours, and Earnings Survey Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	INDUSTRY	Industry code (character)
	DETAIL	Private/Government detail
Sorting Order	BY STATE AREA DIVISION INDUSTRY DETAIL	
Series Variables	Series variable names are the same as data type codes prefixed by SA.	
	SA1	All employees
	SA2	Women workers
	SA3	Production workers
	SA4	Average weekly earnings
	SA5	Average weekly hours
Missing Codes	Series data values are set to MISSING when their status codes are 1.	

Global Insight DRI Data Files

The DRIBASIC (formerly CITIBASE) database contains economic and financial indicators of the U.S. and international economies gathered from various government and private sources by DRI/McGraw-Hill, Inc. There are over 8000 yearly, quarterly, monthly, weekly, and daily time series.

Global Insight, formerly DRI/McGraw-Hill, distributes Basic Economic data files on various media. Old DRIDDS data files can be read by DATASOURCE using the DRIDDS filetype.

The following DRI file types are supported.

FILETYPE=DRIBASIC–Global Insight DRI Basic Economic Data Files

Table 12.13 FILETYPE=DRIBASIC–Global Insight DRI Basic Economic Data Files

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH, WEEK, WEEK1.1, WEEK1.2, WEEK1.3, WEEK1.4, WEEK1.5, WEEK1.6, WEEK1.7, WEEKDAY	
BY Variables	None	
Series Variables	Variable names are taken from the series descriptor records in the data file. Note that series codes can be 20 bytes.	
Missing Codes	MISSING=('1.000000E9'=, 'NA'-'ND'=,)	

Note that when you specify the INTERVAL=WEEK option, all the weekly series will be aggregated, and the DATE variable in the OUT= data set will be set to the date of Sundays. The date of first observation for each series is the Sunday marking the beginning of the week that contains the starting date of that variable.

FILETYPE=DRIDDS—Global Insight DRI Data Delivery Service Data Files**Table 12.14** FILETYPE=DRIDDS—Global Insight DRI Data Delivery Service Data Files

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), SEMIYEAR, QUARTER, MONTH, SEMI-MONTH, TENDAY, WEEK, WEEK1.1, WEEK1.2, WEEK1.3, WEEK1.4, WEEK1.5, WEEK1.6, WEEK1.7, WEEKDAY, DAY	
BY Variables	None	
Series Variables	Variable names are taken from the series descriptor records in the data file. Note that series names can be 24 bytes.	
Missing Codes	MISSING=('NA'-'ND'= .)	

FILETYPE=CITIOLD—Old Format CITIBASE Data Files

This file type is used for CITIBASE data distributed prior to May 1987.

Table 12.15 FILETYPE=CITIOLD—Old Format CITIBASE Data Files

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	None	
Series Variables	Variable names are taken from the series descriptor records in the data file and are the same as the series codes reported in the <i>CITIBASE Directory</i> .	
Missing Codes	1.0E9=.	

FILETYPE=CITIDISK—PC Format CITIBASE Databases**Table 12.16** FILETYPE=CITIDISK—PC Format CITIBASE Databases

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in groups of three associated files having the same filename but different extensions: KEY, IND, or DB. The IN-FILE= option should contain three filerefs in the following order: IN-FILE=(<i>keyfile indfile dbfile</i>).	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	None	
Series Variables	Series variable names are the same as series codes reported in the <i>CITIBASE Directory</i> .	
Missing Codes	1.0E9=.	

COMPUSTAT Data Files

COMPUSTAT data files, distributed by Standard & Poor's Compustat Services, Inc., consist of a collection of financial, statistical, and market information covering several thousand industrial and nonindustrial companies. Data are available in both an IBM 360/370 format and a "Universal Character" format, both of which further subdivide into annual and quarterly formats.

The BY variables are used to select individual companies or a group of companies. Individual companies can be selected by their unique six-digit CUSIP issuer code (CNUM). A number of specific groups of companies can be extracted by the following key fields:

FILE	specifies the file identification code used to group companies by files.
ZLIST	specifies the exchange listing code that can be used to group companies by exchange.
DNUM	is used to extract companies in a specific SIC industry group.

Series names are internally constructed from the data array names documented in the COMPUSTAT manual. Each column of data array is treated as a SAS variable. The names of these variables are generated by concatenating the corresponding column numbers to the array name.

Missing values use four codes. Missing code '.C' represents a combined figure where the data item has been combined into another data item, '.I' reports an insignificant figure, '.S' represents a semi-annual figure in the second and fourth quarters, '.A' represents an annual figure in the fourth quarter, and '.' indicates that the data item is not available. The missing codes '.C' and '.I' are not used for Aggregate or Prices, Dividends, and Earnings (PDE) files. The missing codes '.S' and '.A' are used only on the Industrial Quarterly File and not on the Aggregate Quarterly, Business Information, or PDE files.

FILETYPE=CSAIBM–COMPUSTAT Annual, IBM 360/370 Format

FILETYPE=CSAIY2–Four-Digit Year COMPUSTAT Annual, IBM 360/370 Format

Table 12.17 FILETYPE=CSAIBM,CSAIY2 –COMPUSTAT Annual,IBM 360/370 Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default)	
BY Variables	DNUM	Industry Classification Code (numeric)
	CNUM	CUSIP Issuer Code (character)
	CIC	CUSIP Issue Number and Check Digit (numeric)
	FILE	File Identification Code (numeric)
	ZLIST	Exchange Listing and S&P Index Code (numeric)
	CONAME	Company Name (character)
	INAME	Industry Name (character)
	SMBL	Stock Ticker Symbol (character)
	XREL	S&P Industry Index Relative Code (numeric)
	STK	Stock Ownership Code (numeric)
	STATE	Company Location Identification Code - State (numeric)

Table 12.17 CSAIBM,CSAIY2 –COMPUSTAT Annual,IBM 360/370 Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	COUNTY	Company Location Identification Code - County (numeric)
	FINC	Incorporation Code - Foreign (numeric)
	EIN	Employer Identification Number (character)
	CPSPIN	S&P Index Primary Marker (character)
	CSSPIN	S&P Index Secondary Identifier (character)
	CSSPII	S&P Index Subset Identifier (character)
	SDBT	S&P Senior Debt Rating - Current (character)
	SDBTIM	Footnote- S&P Senior Debt Rating- Current (character)
	SUBDBT	S&P Subordinated Debt Rating - Current (character)
	CPAPER	S&P Commercial Paper Rating - Current (character)
Sorting Order	BY DNUM CNUM CIC	
Series Variables	DATA1-DATA350 FYR UCODE SOURCE AFTNT1-AFTNT70	
Default KEEP List	DROP DATA322-DATA326 DATA338 DATA345-DATA347 DATA350 AFTNT52-AFTNT70;	
Missing Codes	0.0001=. 0.0004=.C 0.0008=.I 0.0002=.S 0.0003=.A	

FILETYPE=CS48QIBM–COMPUSTAT 48-Quarter, IBM 360/370 Format

FILETYPE=CSQIY2–FOUR-DIGIT YEAR COMPUSTAT 48-Quarter, IBM 360/370 Format

Table 12.18 FILETYPE=CS48QIBM,CSQIY2 –COMPUSTAT 48-Quarter, IBM 360/370 Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	QUARTER (default)	
BY Variables	DNUM	Industry Classification Code (numeric)
	CNUM	CUSIP Issuer Code (character)
	CIC	CUSIP Issue Number and Check Digit (numeric)
	FILE	File Identification Code (numeric)
	CONAME	Company Name (character)
	INAME	Industry Name (character)
	EIN	Employer Identification Number (character)
	STK	Stock Ownership Code (numeric)
	SMBL	Stock Ticker Symbol (character)
	ZLIST	Exchange Listing and S&P Index Code (numeric)
	XREL	S&P Industry Index Relative Code (numeric)
	FIC	Incorporation Code - Foreign (numeric)
	INCORP	Incorporation Code - State (numeric)
	STATE	Company Location Identification Code - State (numeric)

Table 12.18 CS48QIBM,CSQIY2 –COMPUSTAT 48-Quarter, IBM 360/370 Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	COUNTY	Company Location Identification Code - County (numeric)
	CANDX	Canadian Index Code - Current (character)
Sorting Order	BY DNUM CNUM CIC;	
Series Variables	DATA1- DATA232	Data Array
	QFTNT1- QFTNT60	Data Footnotes
	FYR	Fiscal Year-End Month of Data
	SPCSCYR	SPCS Calendar Year
	SPCSCQTR	SPCS Calendar Quarter
	UCODE	Update Code
	SOURCE	Source Document Code
	BONDRATE	S&P Bond Rating
	DEBTCL	S&P Class of Debt
	CPRATE	S&P Commercial Paper Rating
	STOCK	S&P Common Stock Ranking
	MIC	S&P Major Index Code
	IIC	S&P Industry Index Code
	REPORTDT	Report Date of Quarterly Earnings
	FORMAT	Flow of Funds Statement Format Code
	DEBTRT	S&P Subordinated Debt Rating
	CANIC	Canadian Index Code
	CS	Comparability Status
	CSA	Company Status Alert
	SENIOR	S&P Senior Debt Rating
Default List	KEEP	DROP DATA122-DATA232 QFTNT24-QFTNT60;
Missing Codes		0.0001=. 0.0004=.C 0.0008=.I 0.0002=.S 0.0003=.A

FILETYPE=CSAUC–COMPUSTAT Annual, Universal Character Format**FILETYPE=CSAUCY2–Four-Digit Year COMPUSTAT Annual, Universal Character Format****Table 12.19** FILETYPE=CSAUC,CSAUCY2 –COMPUSTAT Annual, Universal Character Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files		Database is stored in a single file.
INTERVAL=	YEAR (default)	
BY Variables	DNUM	Industry Classification Code (numeric)
	CNUM	CUSIP Issuer Code (character)
	CIC	CUSIP Issue Number and Check Digit (character)
	FILE	File Identification Code (numeric)

Table 12.19 CSAUC,CSAUCY2 –COMPUSTAT Annual, Universal Character Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	ZLIST	Exchange Listing and S&P Index Code (numeric)
	CONAME	Company Name (character)
	INAME	Industry Name (character)
	SMBL	Stock Ticker Symbol (character)
	XREL	S&P Industry Index Relative Code (numeric)
	STK	Stock Ownership Code (numeric)
	STATE	Company Location Identification Code - State (numeric)
	COUNTY	Company Location Identification Code - County (numeric)
	FINC	Incorporation Code - Foreign (numeric)
	EIN	Employer Identification Number (character)
	CPSPIN	S&P Index Primary Marker (character)
	CSSPIN	S&P Index Secondary Identifier (character)
	CSSPII	S&P Index Subset Identifier (character)
	SDBT	S&P Senior Debt Rating - Current (character)
	SDBTIM	Footnote- S&P Senior Debt Rating- Current (character)
	SUBDBT	S&P Subordinated Debt Rating - Current (character)
	CPAPER	S&P Commercial Paper Rating - Current (character)
Sorting Order	BY DNUM CNUM CIC	
Series Variables	DATA1-DATA350 FYR UCODE SOURCE AFTNT1-AFTNT70	
Default KEEP List	DROP DATA322-DATA326 DATA338 DATA345-DATA347 DATA350 AFTNT52-AFTNT70;	
Missing Codes	-0.001=, -0.004=.C -0.008=.I -0.002=.S -0.003=.A	

FILETYPE=CS48QUC–COMPUSTAT 48 Quarter, Universal Character Format

FILETYPE=CSQUCY2–Four-Digit Year COMPUSTAT 48 Quarter, Universal Character Format

Table 12.20 FILETYPE=CS48QUC,CSQUCY2 –COMPUSTAT 48 Quarter, Universal Character Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	QUARTER (default)	
BY Variables	DNUM	Industry Classification Code (numeric)
	CNUM	CUSIP Issuer Code (character)
	CIC	CUSIP Issue Number and Check Digit (character)
	FILE	File Identification Code (numeric)
	CONAME	Company Name (character)
	INAME	Industry Name (character)

Table 12.20 CS48QUC,CSQUCY2 –COMPUSTAT 48 Quarter, Universal Character Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	EIN	Employer Identification Number (character)
	STK	Stock Ownership Code (numeric)
	SMBL	Stock Ticker Symbol (character)
	ZLIST	Exchange Listing and S&P Index Code (numeric)
	XREL	S&P Industry Index Relative Code (numeric)
	FIC	Incorporation Code - Foreign (numeric)
	INCORP	Incorporation Code - State (numeric)
	STATE	Company Location Identification Code - State (numeric)
	COUNTY	Company Location Identification Code - County (numeric)
	CANDXC	Canadian Index Code - Current (numeric)
Sorting Order	BY DNUM CNUM CIC	
Series Variables	DATA1- DATA232	Data Array
	QFTNT1- QFTNT60	Data Footnotes
	FYR	Fiscal Year-End Month of Data
	SPCSCYR	SPCS Calendar Year
	SPCSCQTR	SPCS Calendar Quarter
	UCODE	Update Code
	SOURCE	Source Document Code
	BONDRATE	S&P Bond Rating
	DEBTCL	S&P Class of Debt
	CPRATE	S&P Commercial Paper Rating
	STOCK	S&P Common Stock Ranking
	MIC	S&P Major Index Code
	IIC	S&P Industry Index Code
	REPORTDT	Report Date of Quarterly Earnings
	FORMAT	Flow of Funds Statement Format Code
	DEBTRT	S&P Subordinated Debt Rating
	CANIC	Canadian Index Code - Current
	CS	Comparability Status
	CSA	Company Status Alert
	SENIOR	S&P Senior Debt Rating
Default List	KEEP	DROP DATA122-DATA232 QFTNT24-QFTNT60;
Missing Codes		-0.001=, -0.004=.C -0.008=.I -0.002=.S -0.003=.A

CRSP Stock Files

The Center for Research in Security Prices provides comprehensive security price data through two primary stock files, the NYSE/AMEX file and the NASDAQ file. These files contain master and return components,

available separately or combined. CRSP stock files are further differentiated by the frequency at which prices and returns are reported, daily or monthly. Both daily and monthly files contain annual data fields.

CRSP data files are distributed in CRSPAccess format. See Chapter 38, “The SASECRSP Interface Engine,” for more about accessing your CRSPAccess database. You can convert your CRSPAccess data to binary format (SFA format) by using the CRSP-supplied utility (STK_DUMP_BIN). Use the DATASOURCE procedure for SFA format access and use SASECRSP Interface for CRSPAccess.

CRSP stock data (in SFA format) are provided in two files, a main data file containing security information and a calendar/indices file containing a list of trading dates and market information associated with those trading dates.

The file types for CRSP stock files are constructed by concatenating CRSP with a D or M to indicate the frequency of data, followed by B, C, or I to indicate file formats. B is for host binary, C is for character, and I is for IBM binary formats. The last character in the file type indicates if you are reading the Calendar/Indices file (I), or if you are extracting the security (S) or annual data (A). For example, the file type for the daily NYSE/AMEX combined data in IBM binary format is CRSPDIS. Its calendar/indices file can be read by CRSPDII, and its annual data can be extracted by CRSPDIA.

Starting in 1995, binary data used split records (RICFAC=2), so the 1995 filetypes (CR95*) should be used for 1995 and 1996 binary data. If you use utility routines supplied by CRSP to convert a character format file to a binary format file on a given host, then you need to use host binary file types (RIDFAC=1) to read those files in. Note that you cannot do the conversion on one host and transfer and read the file on another host.

If you are using the CRSPAccess Database, you will need to use the utility routine (stk_dump_bin) supplied by CRSP to generate the UNIX binary format of the data. You can access the UNIX (or SUN) binary data by using PROC DATASOURCE with the CRSPDUS for daily or CRSPMUS for monthly stock data.

For the four-digit year data, use the Y2K-compliant filetypes for that data type.

For CRSP file types, the INFILE= option must be of the form

```
INFILE=( calfile security1 < security2 ... > )
```

where *calfile* is the fileref assigned to the calendar/indices file, and *security1 < security2 ... >* are the filerefs given to the security files, in the order in which they should be read.

CRSP Calendar/Indices Files

Table 12.21 CRSP Calendar/Indices Files Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	DAY	for products DA, DR, DX, EX, NX, and RA
	MONTH	for products MA, MX, and MZ
BY Variables	None	
Series Variables	VWRETD	Value-Weighted Return (including all distributions)

Table 12.21 CRSP Calendar/Indices Files Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	VWRETX	Value-Weighted Return (excluding dividends)
	EWRETD	Equal-Weighted Return (including all distributions)
	EWRETX	Equal-Weighted Return (excluding dividends)
	TOTVAL	Total Market Value
	TOTCNT	Total Market Count
	USDVAL	Market Value of Securities Used
	USDCNT	Count of Securities Used
	SPINDEX	Level of the Standard & Poor's Composite Index
	SPRTRN	Return on the Standard & Poor's Composite Index
	NCINDEX	NASDAQ Composite Index
	NCRTRN	NASDAQ Composite Return
Default List	KEEP	All variables will be kept.

CRSP Daily Security Files**Table 12.22** CRSP Daily Security Files Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	INFILE=(calfile securty1 < securty2 ... >)	
INTERVAL=	DAY	
BY Variables	CUSIP	CUSIP Identifier (character)
	PERMNO	CRSP Permanent Number (numeric)
	COMPNO	NASDAQ Company Number (numeric)
	ISSUNO	NASDAQ Issue Number (numeric)
	HEXCD	Header Exchange Code (numeric)
	HSICCD	Header SIC Code (numeric)
Sorting Order	BY CUSIP	
Series Variables	BIDLO	Bid or Low
	ASKHI	Ask or High
	PRC	Closing Price of Bid/Ask Average
	VOL	Share Volume
	RET	Holding Period Return missing=(-66.0 = .p -77.0 = .t -88.0 = .r -99.0 = .b)
	BXRET	Beta Excess Return missing=(-44.0 = .)
	SXRET	Standard Deviation Excess Return missing=(-44.0 = .)
Events	NAMES	NCUSIP Name CUSIP TICKER Exchange Ticker Symbol COMNAM Company Name SHRCLS Share Class

Table 12.22 CRSP Daily Security Files Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
		SHRCD Exchange Code
		EXCHCD Exchange Code
		SICCD Standard Industrial Classification Code
	DIST	DISTCD Distribution Code
		DIVAMT Dividend Cash Amount
		FACPR Factor to Adjust Price
		FACSHR Factor to Adjust Shares Outstanding
		DCLRDT Declaration Date
		RCRDDT Record Date
		PAYDT Payment Date
	SHARES	SHROUT Number of Shares Outstanding
		SHRFLG Share Flag
	DELIST	DLSTCD Delisting Code
		NWPERM New CRSP Permanent Number
		NEXTDT Date of Next Available Information
		DLBID Delisting Bid
		DLASK Delisting Ask
		DLPRC Delisting Price
		DLVOL Delisting Volume
		missing=(-99 = .)
		DLRET Delisting Return
		missing=(-55.0=.s -66.0=.t -88.0=.a -99.0=.p);
	NASDIN	TRTSCD Traits Code
		NMSIND National Market System Indicator
		MMCNT Market Maker Count
		NSDINX NASD Index
Default Lists	KEEP	All periodic series variables will be output to the OUT= data set and all event variables will be output to the OUTEVENT= data set.

CRSP Monthly Security Files**Table 12.23** CRSP Monthly Security Files Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	INFILE=(calfile security1 < security2 ... >)	
INTERVAL=	MONTH	
BY Variables	CUSIP	CUSIP Identifier (character)
	PERMNO	CRSP Permanent Number (numeric)

Table 12.23 CRSP Monthly Security Files Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	COMPNO	NASDAQ Company Number (numeric)
	ISSUNO	NASDAQ Issue Number (numeric)
	HEXCD	Header Exchange Code (numeric)
	HSICCD	Header SIC Code (numeric)
Sorting Order	BY CUSIP	
Series Variables	BIDLO	Bid or Low
	ASKHI	Ask or High
	PRC	Closing Price of Bid/Ask average
	VOL	Share Volume
	RET	Holding Period Return missing=(-66.0 = .p -77.0 = .t -88.0 = .r -99.0 = .b);
	RETX	Return Without Dividends missing=(-44.0 = .)
	PRC2	Secondary Price missing=(-44.0 = .)
Events	NAMES	NCUSIP Name CUSIP
		TICKER Exchange Ticker Symbol
		COMNAM Company Name
		SHRCLS Share Class
		SHRCD Share Code
		EXCHCD Exchange Code
		SICCD Standard Industrial Classification Code
	DIST	DISTCD Distribution Code
		DIVAMT Dividend Cash Amount
		FACPR Factor to Adjust Price
		FACSHR Factor to Adjust Shares Outstanding
		EXDT Ex-distribution Date
		RCRDDT Record Date
		PAYDT Payment Date
	SHARES	SHROUT Number of Shares Outstanding
		SHRFLG Share Flag
	DELIST	DLSTCD Delisting Code
		NWPERM New CRSP Permanent Number
		NEXTDT Date of Next Available Information
		DLBID Delisting Bid
		DLASK Delisting Ask
		DLPRC Delisting Price
		DLVOL Delisting Volume
		DLRET Delisting Return missing=(-55.0=.s -66.0=.t -88.0=.a -99.0=.p);

Table 12.23 CRSP Monthly Security Files Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	NASDIN	TRTSCD NMSIND MMCNT NSDINX
		Traits Code National Market System Indicator Market Maker Count NASD Index
Default Lists	KEEP	All periodic series variables will be output to the OUT= data set and all event variables will be output to the OUTEVENT= data set.

CRSP Annual Data**Table 12.24** CRSP Annual Data Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	INFILE=(security1 < security2 ... >)	
INTERVAL=	YEAR	
BY Variables	CUSIP	CUSIP Identifier (character)
	PERMNO	CRSP Permanent Number (numeric)
	COMPNO	NASDAQ Company Number (numeric)
	ISSUNO	NASDAQ Issue Number (numeric)
	HEXCD	Header Exchange Code (numeric)
	HSICCD	Header SIC Code (numeric)
Sorting Order	BY CUSIP	
Series Variables	CAPV	Year End Capitalization
	SDEVV	Annual Standard Deviation missing=(-99.0 = .)
	BETAV	Annual Beta missing=(-99.0 = .)
	CAPN	Year End Capitalization Portfolio Assignment
	SDEVN	Standard Deviation Portfolio Assignment
	BETAN	Beta Portfolio Assignment
Default Lists	KEEP	All variables will be kept.

FAME Information Services Databases

The DATASOURCE procedure provides access to FAME Information Services databases for UNIX-based systems only. See “The SASEFAME Interface Engine” in Chapter 40, “[The SASEFAME Interface Engine](#),” for information about a more flexible FAME database access.

The DATASOURCE interface to FAME requires a component supplied by FAME Information Services, Inc. Once this FAME component is installed on your system, you can use the DATASOURCE procedure to extract data from your FAME databases by giving the following specifications.

Specify FILETYPE=FAME in the PROC DATASOURCE statement and give the FAME database name to access with a DBNAME='fame-database' option. The character string you specify in the DBNAME= option is passed through to FAME; specify the value of this option as you would in accessing the database from within FAME software.

Specify the output SAS data set to be created, the frequency of the series to be extracted, and other usual DATASOURCE procedure options as appropriate.

Specify the time range to extract with a RANGE statement. The RANGE statement is required when extracting series from FAME databases.

Name the FAME series to be extracted with a KEEP statement. The items in the KEEP statement are passed through to FAME software; therefore, you can use any valid FAME expression to specify the series to be extracted. Enclose in quotes any FAME series name or expression that is not a valid SAS name.

Name the SAS variable names you want to use for the extracted series in a RENAME statement. Give the FAME series name or expression (in quotes if needed) followed by an equal sign and the SAS name. The RENAME statement is not required; however, if the FAME series name is not a valid SAS variable name, the DATASOURCE procedure will construct a SAS name by translating and truncating the FAME series name. This process might not produce the desired name for the variable in the output SAS data set, so a rename statement could be used to produce a more appropriate variable name. The VALIDVARNAME=ANY option in your SAS options statement can be used to allow special characters in the SAS variable name.

For an alternative solution to PROC DATASOURCE's access to FAME, see "The SASEFAME Interface Engine" in Chapter 40, "[The SASEFAME Interface Engine](#)."

FILETYPE=FAME–FAME Information Services Databases

Table 12.25 FILETYPE=FAME–FAME Information Services Database Format

Metadata Field Types	Metadata Fields	Metadata Labels
INTERVAL=	YEAR	correspond to FAME's ANNUAL(DECEMBER)
	YEAR.2	correspond to FAME's ANNUAL(JANUARY)
	YEAR.3	correspond to FAME's ANNUAL(FEBRUARY)
	YEAR.4	correspond to FAME's ANNUAL(MARCH)
	YEAR.5	correspond to FAME's ANNUAL(APRIL)
	YEAR.6	correspond to FAME's ANNUAL(MAY)
	YEAR.7	correspond to FAME's ANNUAL(JUNE)
	YEAR.8	correspond to FAME's ANNUAL(JULY)
	YEAR.9	correspond to FAME's ANNUAL(AUGUST)
	YEAR.10	correspond to FAME's ANNUAL(SEPTEMBER)
	YEAR.11	correspond to FAME's ANNUAL(OCTOBER)
	YEAR.12	correspond to FAME's ANNUAL(NOVEMBER)
	SEMIYEAR	correspond to FAME's SEMIYEAR
	QUARTER	correspond to FAME's QUARTER
	MONTH	correspond to FAME's MONTH
	SEMIMONTH	correspond to FAME's SEMIMONTH
	TENDAY	correspond to FAME's TENDAY
	WEEK	corresponds to FAME's WEEKLY(SATURDAY)

Table 12.25 FILETYPE=FAME—FAME Information Services Database Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	WEEK.2	corresponds to FAME's WEEKLY(SUNDAY)
	WEEK.3	corresponds to FAME's WEEKLY(MONDAY)
	WEEK.4	corresponds to FAME's WEEKLY(TUESDAY)
	WEEK.5	corresponds to FAME's WEEKLY(WEDNESDAY)
	WEEK.6	corresponds to FAME's WEEKLY(THURSDAY)
	WEEK.7	corresponds to FAME's WEEKLY(FRIDAY)
	WEEK2	corresponds to FAME's BIWEEKLY(ASATURDAY)
	WEEK2.2	correspond to FAME's BIWEEKLY(ASUNDAY)
	WEEK2.3	correspond to FAME's BIWEEKLY(AMONDAY)
	WEEK2.4	correspond to FAME's BIWEEKLY(ATUESDAY)
	WEEK2.5	correspond to FAME's BIWEEKLY(AWEDNESDAY)
	WEEK2.6	correspond to FAME's BIWEEKLY(ATHURSDAY)
	WEEK2.7	correspond to FAME's BIWEEKLY(AFRIDAY)
	WEEK2.8	correspond to FAME's BIWEEKLY(BSATURDAY)
	WEEK2.9	correspond to FAME's BIWEEKLY(BSUNDAY)
	WEEK2.10	correspond to FAME's BIWEEKLY(BMONDAY)
	WEEK2.11	correspond to FAME's BIWEEKLY(BTUESDAY)
	WEEK2.12	correspond to FAME's BIWEEKLY(BWEDNESDAY)
	WEEK2.13	correspond to FAME's BIWEEKLY(BTHURSDAY)
	WEEK2.14	correspond to FAME's BIWEEKLY(BFRIDAY)
	WEEKDAY	correspond to FAME's WEEKDAY
	DAY	correspond to FAME's DAY
BY Vari- ables	ables	None
Series Vari- ables	ables	Variable names are constructed from the FAME series codes. Note that series names are limited to 32 bytes.

Haver Analytics Data Files

Haver Analytics offers a broad range of economic, financial, and industrial data for the United States and other countries. See “The SASEHAVR Interface Engine” in Chapter 41, “[The SASEHAVR Interface Engine](#),” for information about accessing your HAVR DLX database. SASEHAVR is supported on most Windows environments. Use the DATASOURCE procedure for serial access of your data. The format of Haver Analytics data files is similar to the CITIBASE/DRIBASIC formats.

FILETYPE=HAVR—Haver Analytics Data Files HAVERO—Old Format Haver Files

Table 12.26 FILETYPE=HAVR—Haver Analytics Data Files Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files		Database is stored in a single file.
INTERVAL=		YEAR (default), QUARTER, MONTH

Table 12.26 FILETYPE=HAVER—Haver Analytics Data Files Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
Series Variables	Variable names are taken from the series descriptor records in the data file. NOTE: HAVER filetype reports the UPDATE and SOURCE in the OUTCONT= data set, while HAVERO does not.	
Missing Codes	1.0E9=.	

IMF Data Files

The International Monetary Fund's Economic Information System (EIS) offers subscriptions for their International Financial Statistics (IFS), Direction of Trade Statistics (DOTS), Balance of Payment Statistics (BOPS), and Government Finance Statistics (GFS) databases. The first three contain annual, quarterly, and monthly data, while the GFS file has only annual data.

PROC DATASOURCE supports only the packed format IMF data.

FILETYPE=IMFIFSP—International Financial Statistics, Packed Format

The IFS data files contain over 23,000 time series including interest and exchange rates, national income and product accounts, price and production indexes, money and banking, export commodity prices, and balance of payments for nearly 200 countries and regional aggregates.

Table 12.27 FILETYPE=IMFIFSP—International Financial Statistics Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	COUNTRY	Country Code (character, three digits)
	CSC	Control Source Code (character)
	PARTNER	Partner Country Code (character, three digits)
	VERSION	Version Code (character)
Sorting Order	BY COUNTRY CSC PARTNER VERSION	
Series Variables	Series variable names are the same as series codes reported in <i>IMF Documentation</i> prefixed by F for data and F_F for footnote indicators.	
Default List	KEEP	By default all the footnote indicators will be dropped.

FILETYPE=IMFDOTSP—Direction of Trade Statistics, Packed Format

The DOTS files contain time series on the distribution of exports and imports for about 160 countries and country groups by partner country and areas.

Table 12.28 FILETYPE=IMFDOTSP—Direction of Trade Statistics Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	COUNTRY	Country Code (character, three digits)
	CSC	Control Source Code (character)
	PARTNER	Partner Country Code (character, three digits)
	VERSION	Version Code (character)
Sorting Order	BY COUNTRY CSC PARTNER VERSION	
Series Variables	Series variable names are the same as series codes reported in <i>IMF Documentation</i> prefixed by D for data and F_D for footnote indicators.	
Default List	KEEP	By default all the footnote indicators will be dropped.

FILETYPE=IMFBOPSP—Balance of Payment Statistics, Packed Format

The BOPS data files contain approximately 43,000 time series on balance of payments for about 120 countries.

Table 12.29 FILETYPE=IMFBOPSP—Balance of Payment Statistics Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	COUNTRY	Country Code (character, three digits)
	CSC	Control Source Code (character)
	PARTNER	Partner Country Code (character, three digits)
	VERSION	Version Code (character)
Sorting Order	BY COUNTRY CSC PARTNER VERSION	
Series Variables	Series variable names are the same as series codes reported in <i>IMF Documentation</i> prefixed by B for data and F_B for footnote indicators.	
Default List	KEEP	By default all the footnote indicators will be dropped.

FILETYPE=IMFGFSP—Government Finance Statistics, Packed Format

The GFS data files encompass approximately 28,000 time series that give a detailed picture of federal government revenue, grants, expenditures, lending minus repayment financing and debt, and summary data of state and local governments, covering 128 countries.

Table 12.30 FILETYPE=IMFGFSP—Government Finance Statistics Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored in a single file.	
INTERVAL=	YEAR (default), QUARTER, MONTH	
BY Variables	COUNTRY	Country Code (character, three digits)
	CSC	Control Source Code (character)
	PARTNER	Partner Country Code (character, three digits)
	VERSION	Version Code (character)
Sorting Order	BY COUNTRY CSC PARTNER VERSION	
Series Variables	Series variable names are the same as series codes reported in <i>IMF Documentation</i> prefixed by G for data and F_G for footnote indicators.	
Default List	KEEP	By default all the footnote indicators will be dropped.

OECD Data Files

The Organization for Economic Cooperation and Development compiles and distributes statistical data, including National Accounts and Main Economic Indicators.

FILETYPE=OECDANA—Annual National Accounts

The ANA data files contain both main national aggregates accounts (Volume I) and detailed tables for each OECD Member country (Volume II).

Table 12.31 FILETYPE=OECDANA—Annual National Accounts Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored on a single file.	
INTERVAL=	YEAR (default), SEMIYR1.6, QUARTER, MONTH, WEEK, WEEKDAY	
BY Variables	PREFIX	Table number prefix (character)
	CNTRYZ	Country Code (character)
Series Variables	Series variable names are the same as the mnemonic name of the element given on the element 'E' record. They are taken from the 12 byte time series 'T' record time series indicative.	
Series Renamed	OLDNAME	NEWNAME
	p0discgdpe	p0digdpe
	doll2gdpe	dol2gdpe
	doll3gdpe	dol3gdpe
	doll1gdpe	dol1gdpe
	ppp1gdpd	pp1gdpd
	ppp1gdpd1	pp1gdpd1
	p0itxgdpc	p0itgdpc

Table 12.31 FILETYPE=OECDANA—Annual National Accounts Format continued)

Metadata Field Types	Metadata Fields	Metadata Labels
	p0itxgdps	p0itgdps
	p0subgdpc	p0sugdpc
	p0subgdps	p0sugdps
	p0cfcgdpc	p0cfgdpc
	p0cfgddps	p0cfgdps
	p0discgdpc	p0dicgdc
	p0discgdps	p0dicgds
Missing Codes	A data value of * is interpreted as MISSING.	

FILETYPE=OECDQNA—Quarterly National Accounts

The QNA file contains the main aggregates of quarterly national accounts for 16 OECD Member Countries and on a selected number of aggregates for 4 groups of member countries: OECD-Total, OECD-Europe, EEC, and the 7 major countries.

Table 12.32 FILETYPE=OECDQNA—Quarterly National Accounts Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored on a single file.	
INTERVAL=	QUARTER(default),YEAR	
BY Variables	COUNTRY	Country Code (character)
	SEASON	Seasonality S=seasonally adjusted 0=raw data, not seasonally adjusted
	PRICETAG	Prices C=data at current prices R,L,M=data at constant prices P,K,J,V=implicit price index or volume index
Series Variables	Subject code used to distinguish series within countries. Series variables are prefixed by _ for data, C for control codes, and D for relative date.	
Default DROP List	By default all the control codes and relative dates will be dropped.	
Missing Codes	A data value of + or - is interpreted as MISSING.	

FILETYPE=OECDMEI–Main Economic Indicators

The MEI file contains all series found in Parts 1 and 2 of the publication *Main Economic Indicators*.

Table 12.33 FILETYPE=OECDMEI–Main Economic Indicators Format

Metadata Field Types	Metadata Fields	Metadata Labels
Data Files	Database is stored on a single file.	
INTERVAL=	YEAR(default),QUARTER,MONTH	
BY Variables	COUNTRY	Country Code (character)
	CURRENCY	Unit of expression of the series.
	ADJUST	Adjustment 0,H,S,A,L=no adjustment 1,I=calendar or working day adjusted 2,B,J,M=seasonally adjusted by National Authorities 3,K,D=seasonally adjusted by OECD
Series Variables	Series variables are prefixed by _ for data, C for control codes, and D for relative date in weeks since last updated.	
Default DROP List	By default, all the control codes and relative dates will be dropped.	
Missing Codes	A data value of + or - is interpreted as MISSING.	

Examples: DATASOURCE Procedure

Example 12.1: BEA National Income and Product Accounts

In this example, exports and imports of goods and services are extracted to demonstrate how to work with a National Income and Product Accounts (NIPA) file.

From the “Statistical Tables” published by the United States Department of Commerce, Bureau of Economic Analysis, the relation of foreign transactions in the Balance of Payments Accounts (BPA) are given in the fifth table (TABNUM='05') of the “Foreign Transactions” section (PARTNO='4'). Moreover, the first line in the table gives BPAs, while the eighth gives exports of goods and services. The series names __00100 and __00800, are constructed by two underscores followed by three digits as the line numbers, and then two digits as the column numbers.

The following statements put this information together to extract quarterly BPAs and exports from a BEA-NIPA type file:

```
/*- assign fileref to the external file to be processed -----*/

filename ascfile "%sysget(DATASRC_DATA)beanipa.data" recfm=v lrecl=108;
```

```

title1 'Relation of Foreign Transactions to Balance of Payment Accounts';
title2 'Range from 1984 to 1989';

title3 'Annual';
proc datasource filetype=beanipa infile=ascifile
               interval=year
               outselect=off
               outkey=byfor4;

    range from 1984 to 1989;
    keep __00100 __00800;

    label __00100='Balance of Payment Accounts';
    label __00800='Exports of Goods and Services';

    rename __00100=BPAs __00800=exports;
run;

proc print data=byfor4;
run;

/*- assign fileref to the external file to be processed -----*/

filename ascifile "%sysget(DATASRC_DATA)beanipa.data" recfm=v lrecl=108;

title1 'Relation of Foreign Transactions to Balance of Payment Accounts';
title2 'Range from 1984 to 1989';

title3 'Annual';
proc datasource filetype=beanipa infile=ascifile
               interval=year
               outselect=off
               outkey=byfor4
               out=foreign4;

    range from 1984 to 1989;
    keep __00100 __00800;

    label __00100='Balance of Payment Accounts';
    label __00800='Exports of Goods and Services';

    rename __00100=BPAs __00800=exports;

run;

proc contents data=foreign4;
run;
proc print data=foreign4;
run;

```

The results are shown in [Output 12.1.1](#), [Output 12.1.2](#), and [Output 12.1.3](#).

Output 12.1.1 Listing of OUTBY=byfor4 of the BEANIPA Data

Relation of Foreign Transactions to Balance of Payment Accounts									
Range from 1984 to 1989									
Annual									
Obs	PARTNO	TABNUM	ST_DATE	END_DATE	NTIME	NOBS	NINRANGE	NSERIES	NSELECT
1	1	07	1929	1989	61	0	6	2	0
2	1	14	1929	1989	61	0	6	1	0
3	1	15	1929	1989	61	0	6	1	0
4	1	20	1967	1989	23	23	6	2	1
5	1	23	1929	1989	61	0	6	2	0
6	2	04	1929	1989	61	0	6	1	0
7	2	05	1929	1989	61	0	6	2	0
8	3	05	1929	1989	61	0	6	1	0
9	3	14	1952	1989	38	0	6	2	0
10	3	15	1952	1989	38	0	6	7	0
11	3	16	1952	1989	38	0	6	1	0
12	4	05	1946	1989	44	44	6	1	1
13	5	07	1929	1989	61	0	6	1	0
14	5	09	1929	1989	61	0	6	1	0
15	6	04	1929	1989	61	0	6	3	0
16	6	05	1929	1948	20	0	0	2	0
17	6	07	1929	1948	20	0	0	1	0
18	6	08	1929	1989	61	0	6	3	0
19	6	09	1948	1989	42	0	6	1	0
20	6	10	1929	1948	20	0	0	1	0
21	6	14	1929	1948	20	0	0	1	0
22	6	19	1929	1948	20	0	0	1	0
23	6	20	1929	1989	61	0	6	2	0
24	6	22	1929	1989	61	0	6	2	0
25	6	23	1948	1989	42	0	6	1	0
26	6	24	1948	1989	42	0	6	1	0
27	7	09	1929	1989	61	0	6	1	0
28	7	10	1929	1989	61	0	6	2	0
29	7	13	1959	1989	31	0	6	1	0

Output 12.1.2 CONTENTS of OUT=foreign4 of the BEANIPA Data

Relation of Foreign Transactions to Balance of Payment Accounts									
Range from 1984 to 1989									
Annual									
The CONTENTS Procedure									
Alphabetic List of Variables and Attributes									
#	Variable	Type	Len	Format	Label				
3	DATE	Num	4	YEAR4.	Date of Observation				
1	PARTNO	Char	1		Part Number of Publication, IntegerPortion of the Table Number, 1-9				
2	TABNUM	Char	2		Table Number Within Part, DecimalPortion of the Table Number, 1-24				
4	exports	Num	5		Exports of Goods and Services				

Output 12.1.3 Listing of OUT=foreign4 of the BEANIPA Data

Relation of Foreign Transactions to Balance of Payment Accounts					
Range from 1984 to 1989					
Annual					
Obs	PARTNO	TABNUM	DATE	exports	
1	1	20	1984	44	
2	1	20	1985	53	
3	1	20	1986	46	
4	1	20	1987	40	
5	1	20	1988	48	
6	1	20	1989	47	
7	4	05	1984	3835	
8	4	05	1985	3709	
9	4	05	1986	3965	
10	4	05	1987	4496	
11	4	05	1988	5520	
12	4	05	1989	6262	

This example illustrates the following features:

- You need to know the series variables names used by a particular vendor in order to construct the KEEP statement.
- You need to know the BY-variable names and their values for the required cross sections.
- You can use RENAME and LABEL statements to associate more meaningful names and labels with your selected series variables.

Example 12.2: BLS Consumer Price Index Surveys

This example compares changes of the prices in medical care services with respect to different regions for all urban consumers (SURVEY='CU') since May 1975. The source of the data is the Consumer Price Index Surveys distributed by the U.S. Department of Labor, Bureau of Labor Statistics.

An initial run of PROC DATASOURCE gives the descriptive information on different regions available (the OUTBY= data set), as well as the series variable name corresponding to medical care services (the OUTCONT= data set).

```

options yearcutoff = 1900;

filename datafile "%sysget(DATASRC_DATA)blscpi1.data" recfm=v lrecl=152;
proc datasource filetype=blscpi
  interval=mon
  outselect=off
  outby=cpikey(where=( upcase(areaname)
                        in ('NORTHEAST','NORTH CENTRAL','SOUTH','WEST')) )
  outcont=cpicont(where= ( index( upcase(label), 'MEDICAL CARE' ) ) );
  where survey='CU';
run;

title1 'OUTBY= Data Set, By AREANAME Selection';
proc print
  data=cpikey;
run;

title1 'OUTCONT= Data Set, By LABEL Selection';
proc print
  data=cpicont;
run;

```

The OUTBY= data set in [Output 12.2.1](#) lists all cross sections available for the four geographical regions: Northeast (AREA='0100'), North Central (AREA='0200'), Southern (AREA='0300'), and Western (AREA='0400'). The OUTCONT= data set in [Output 12.2.2](#) gives the variable names for medical care related series.

Output 12.2.1 Partial Listings of the OUTBY= Data Set

OUTBY= Data Set, By AREANAME Selection								
Obs	SURVEY	SEASON	AREA	BASPTYPE	BASEPER	BYSELECT	ST_DATE	END_DATE
1	CU	U	0200	S	1982-84=100	1	DEC1977	JUL1990
2	CU	U	0100	S	1982-84=100	1	.	.
3	CW	U	0400	S	1982-84=100	0	DEC1977	JUL1990
4	CW	U	0100	S	1982-84=100	0	.	.
5	CW	U	0200	S	1982-84=100	0	.	.
Obs	NTIME	NOBS	NSERIES	NSELECT	SURTITLE	AREANAME		
1	152	152	2	2	ALL URBAN CONSUM	NORTH CENTRAL		
2	.	0	0	0	ALL URBAN CONSUM	NORTHEAST		
3	152	0	1	0	URBAN WAGE EARN	WEST		
4	.	0	0	0	URBAN WAGE EARN	NORTHEAST		
5	.	0	0	0	URBAN WAGE EARN	NORTH CENTRAL		

Output 12.2.2 Partial Listings of the OUTCONT= Data Set

OUTCONT= Data Set, By LABEL Selection									
		S			L	V			F
		E			L	V			F
		L			E	A			O
		E			E	A			O
		C	T	N	R	L			R
		T	Y	G	N	A			M
		E	P	T	U	B			A
		D	E	H	M	E			T
						L			L
									D
1	ASL5	1	1	5	.	SERVICES LESS MEDICAL CARE		0	0
2	A512	1	1	5	.	MEDICAL CARE SERVICES		0	0
3	A0L5	0	1	5	.	ALL ITEMS LESS MEDICAL CARE		0	0

The following statements make use of this information to extract the data for A512 and descriptive information on cross sections containing A512. [Output 12.2.3](#) and [Output 12.2.4](#) show these results.

```
options yearcutoff = 1900;

filename datafile "%sysget(DATASRC_DATA)blscpi1.data" recfm=v lrecl=152;

proc format;
    value $areafmt '0100' = 'Northeast Region'
                  '0200' = 'North Central Region'
                  '0300' = 'Southern Region'
                  '0400' = 'Western Region';
run;

proc datasource filetype=blscpi interval=month
    out=medical outall=medinfo;
    where survey='CU' and area in ( '0100','0200','0300','0400' );
    keep date a512;
    range from 1988:9;
    format area $areafmt.;
    rename a512=medcare;
run;

title1 'Information on Medical Care Service, OUTALL= Data Set';
proc print
    data=medinfo;
run;

title1 'Medical Care Service By Region, OUT= Data Set';
title2 'Range from September, 1988';
proc print
    data=medical;
run;
```


Output 12.2.3 Printout of the OUTALL= Data Set

Information on Medical Care Service, OUTALL= Data Set																													
Obs	S	U	R	V	E	O	Y	A	R	E	T																		
												B	A	S	P	T	Y	E	L	N	K	C	T						
1	CU	U	North Central Region			S	1982-84=100		1	medcare		1	1	1															
Obs	L	E	N	G	T	H	M	V	A	R	K																		
												B	L	A	B	E	L	M	A	T	L	D	E	N	D	A	T	M	E
1	5	7	50	MEDICAL CARE SERVICES			0	0	DEC1977	JUL1990		152																	
Obs	N	O	B	S	E	T	E	A	R	E	N																		
												I	U	R	E	A	N	A	M	E	S	C	O	D	E	C			
1	152	23	ALL URBAN CONSUM			NORTH CENTRAL			CUUR0200SA512			1																	

Output 12.2.4 Printout of the OUT= Data Set

Medical Care Service By Region, OUT= Data Set Range from September, 1988							
Obs	SURVEY	SEASON	AREA	BASPTYPE	BASEPER	DATE	medcare
1	CU	U	North Central Region	S	1982-84=100	SEP1988	1364
2	CU	U	North Central Region	S	1982-84=100	OCT1988	1365
3	CU	U	North Central Region	S	1982-84=100	NOV1988	1368
4	CU	U	North Central Region	S	1982-84=100	DEC1988	1372
5	CU	U	North Central Region	S	1982-84=100	JAN1989	1387
6	CU	U	North Central Region	S	1982-84=100	FEB1989	1399
7	CU	U	North Central Region	S	1982-84=100	MAR1989	1405
8	CU	U	North Central Region	S	1982-84=100	APR1989	1413
9	CU	U	North Central Region	S	1982-84=100	MAY1989	1416
10	CU	U	North Central Region	S	1982-84=100	JUN1989	1425
11	CU	U	North Central Region	S	1982-84=100	JUL1989	1439
12	CU	U	North Central Region	S	1982-84=100	AUG1989	1452
13	CU	U	North Central Region	S	1982-84=100	SEP1989	1460
14	CU	U	North Central Region	S	1982-84=100	OCT1989	1473
15	CU	U	North Central Region	S	1982-84=100	NOV1989	1481
16	CU	U	North Central Region	S	1982-84=100	DEC1989	1485
17	CU	U	North Central Region	S	1982-84=100	JAN1990	1500
18	CU	U	North Central Region	S	1982-84=100	FEB1990	1516
19	CU	U	North Central Region	S	1982-84=100	MAR1990	1528
20	CU	U	North Central Region	S	1982-84=100	APR1990	1538
21	CU	U	North Central Region	S	1982-84=100	MAY1990	1548
22	CU	U	North Central Region	S	1982-84=100	JUN1990	1557
23	CU	U	North Central Region	S	1982-84=100	JUL1990	1573

The OUTALL= data set in [Output 12.2.3](#) indicates that data values are stored with one decimal place (see the NDEC variable). Therefore, they need to be rescaled, as follows:

```
data medical;
  set medical;
  medcare = medcare * 0.1;
run;
```

This example illustrates the following features:

- Descriptive information needed to write KEEP and WHERE statements can be obtained with an initial run of the DATASOURCE procedure.
- The OUTCONT= and OUTALL= data sets contain information on how data values are stored, such as the precision, the units, and so on.
- The OUTCONT= and OUTALL= data sets report the new series names assigned by the RENAME statement, not the old names (see the NAME variable in [Output 12.2.3](#)).
- You can use PROC FORMAT to define formats for series or BY variables to enhance your output. Note that PROC DATASOURCE associates a permanent format, \$AREAFMT., with the BY variable AREA. As a result, the formatted values are displayed in the printout of the OUTALL=MEDINFO data set (see [Output 12.2.3](#)).

Example 12.3: BLS State and Area Employment, Hours, and Earnings Surveys

This example illustrates how to extract specific series from a State and Area Employment, Hours, and Earnings Survey. The series to be extracted is total employment in real estate and construction industries with respect to states from March 1989 to March 1990.

The State and Area, Employment, Hours and Earnings survey designates the totals for statewide figures by AREA='0000'.

The data type code for total employment is reported to be 1. Therefore, the series name for this variable is SA1, since series names are constructed by adding an SA prefix to the data type codes given by BLS.

[Output 12.3.1](#) and [Output 12.3.2](#) show statewide figures for total employment (SA1) in many industries from March 1989 through March 1990.

```
filename ascifile "%sysget(DATASRC_DATA)blseesa.dat" RECFM=F LRECL=152;
proc datasource filetype=blseesa
    infile=ascifile
    outall=totkey
    out=totemp;
    keep sal;
    range from 1989:3 to 1990:3;
    rename sal=totemp;
run;

title1 'Information on Total Employment, OUTALL= Data Set';
proc print data=totkey;
run;

title1 'Total Employment, OUT= Data Set';
proc print data=totemp;
run;
```

Output 12.3.1 Printout of the OUTALL= Data Set for All BY Groups

Information on Total Employment, OUTALL= Data Set														

```
filename datafile "%sysget(DATASRC_DATA)blseesa.dat" RECFM=F LRECL=152;
proc datasource filetype=blseesa
    outall=totkey
    out=totemp;
```

```

where industry='0000';
keep sal;
range from 1989:3 to 1990:3;
rename sal=totemp;
run;

title1 'Total Employment for Real Estate and Construction, OUT= Data Set';
proc print data=totemp;
run;

```

Output 12.3.2 Printout of the OUT= Data Set for INDUSTRY=0000

Total Employment for Real Estate and Construction, OUT= Data Set							
Obs	STATE	AREA	DIVISION	INDUSTRY	DETAIL	DATE	totemp
1	5	2580	7	0000	1	MAR1989	16
2	5	2580	7	0000	1	APR1989	16
3	5	2580	7	0000	1	MAY1989	16
4	5	2580	7	0000	1	JUN1989	16
5	5	2580	7	0000	1	JUL1989	16
6	5	2580	7	0000	1	AUG1989	16
7	5	2580	7	0000	1	SEP1989	16
8	5	2580	7	0000	1	OCT1989	16
9	5	2580	7	0000	1	NOV1989	16
10	5	2580	7	0000	1	DEC1989	16
11	5	2580	7	0000	1	JAN1990	15
12	5	2580	7	0000	1	FEB1990	15
13	5	2580	7	0000	1	MAR1990	15

Note the following for this example:

- When the INFILE= option is omitted, the fileref assigned to the BLSEESA file is the default value DATAFILE.
- The FROM and TO values in the RANGE statement correspond to monthly data points since the INTERVAL= option defaults to MONTH for the BLSEESA filetype.

Example 12.4: DRI/McGraw-Hill Format CITIBASE Files

Output 12.4.1 and Output 12.4.2 illustrate how to extract weekly series from a sample CITIBASE file. They also demonstrate how the OUTSELECT= option affects the contents of the auxiliary data sets.

The weekly series contained in the sample data file CITIDEMO are listed by the following statements:

```

options yearcutoff=1920;

filename datafile "%sysget(DATASRC_DATA)citidem.dat" RECFM=D LRECL=80;

proc datasource filetype=citibase interval=week

```

```

                                outall=citiall outby=citikey;
run;

title1 'Summary Information on Weekly Data for CITIDEMO File';
proc print data=citikey;
run;

title1 'Weekly Series Available in CITIDEMO File';
proc print data=citiall( drop=label );
run;

```

Output 12.4.1 Listing of the OUTBY= CITIKEY Data Set

Summary Information on Weekly Data for CITIDEMO File						
Obs	ST_DATE	END_DATE	NTIME	NOBS	NSERIES	NSELECT
1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	6	6

Output 12.4.2 Listing of the OUTALL= CITIALL Data Set

Weekly Series Available in CITIDEMO File																
		S						E						A		
		E		F		F		S		N				T		
		L	L	V	B	F	O	O	T	D						T
		E	E	A	L	O	R	R	—	—		N				R
N		C	T	N	R	K	R	M	D	D		T	N	C		I
O	A	T	Y	G	N	N	M	A	A	A		I	O	O		B
b	M	E	P	T	U	U	A	T	T	T		M	B	D		U
s	E	D	E	H	M	M	T	L	D	E		E	S	E		T
1	FF142B	1	1	5	.	36		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	FF142B	1	2
2	WSPCA	1	1	5	.	37		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	WSPCA	1	2
3	WSPUA	1	1	5	.	38		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	WSPUA	1	2
4	WSPIA	1	1	5	.	39		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	WSPIA	1	2
5	WSPGLT	1	1	5	.	40		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	WSPGLT	1	2
6	FCPOIL	1	1	5	.	41		0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	FCPOIL	1	4

Note the following from [Output 12.4.2](#):

- The OUTALL= data set reports the time ranges of variables.
- There are six observations in the OUTALL= data set, the same number as reported by NSERIES and NSELECT variables in the OUTBY= data set.
- The VARNUM variable contains all MISSING values, since no OUT= data set is created.

Output 12.4.3 and Output 12.4.4 demonstrate how the OUTSELECT= option affects the contents of the OUTBY= and OUTALL= data sets when a KEEP statement is present. First, set the OUTSELECT= option to OFF.

```

filename citidemo "%sysget(DATASRC_DATA)citidem.dat" RECFM=D LRECL=80;

proc datasource filetype=citibase infile=citidemo interval=week
      outall=alloff outby=keyoff outselect=off;
  keep WSP;;
run;

title1 'Summary Information on Weekly Data for CITIDEMO File';
proc print data=keyoff;
run;

title1 'Weekly Series Available in CITIDEMO File';
proc print data=alloff( keep=name kept selected st_date
      end_date ntime nobs );
run;

```

Output 12.4.3 Listing of the OUTBY= Data Set with OUTSELECT=OFF

Summary Information on Weekly Data for CITIDEMO File						
Obs	ST_DATE	END_DATE	NTIME	NOBS	NSERIES	NSELECT
1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	6	4

Output 12.4.4 Listing of the OUTALL= Data Set with OUTSELECT=OFF

Weekly Series Available in CITIDEMO File							
Obs	NAME	KEPT	SELECTED	ST_DATE	END_DATE	NTIME	NOBS
1	FF142B	0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
2	WSPCA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
3	WSPUA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
4	WSPIA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
5	WSPGLT	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
6	FCPOIL	0	0	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271

Setting the OUTSELECT= option ON gives results shown in [Output 12.4.5](#) and [Output 12.4.6](#).

```

filename citidemo "%sysget(DATASRC_DATA)citidem.dat" RECFM=D LRECL=80;
proc datasource filetype=citibase infile=citidemo
      interval=week
      outall=allon outby=keyon outselect=on;
  keep WSP;;
run;

title1 'Summary Information on Weekly Data for CITIDEMO File';
proc print data=keyon;
run;

title1 'Weekly Series Available in CITIDEMO File';

```

```
proc print data=allon( keep=name kept selected st_date
                      end_date ntime nobs );
run;
```

Output 12.4.5 Listing of the OUTBY= Data Set with OUTSELECT=ON

Summary Information on Weekly Data for CITIDEMO File						
Obs	ST_DATE	END_DATE	NTIME	NOBS	NSERIES	NSELECT
1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	6	4

Output 12.4.6 Listing of the OUTALL= Data Set with OUTSELECT=ON

Weekly Series Available in CITIDEMO File							
Obs	NAME	KEPT	SELECTED	ST_DATE	END_DATE	NTIME	NOBS
1	WSPCA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
2	WSPUA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
3	WSPIA	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271
4	WSPGLT	1	1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271

Comparison of [Output 12.4.4](#) and [Output 12.4.6](#) reveals the following:

- The OUTALL= data set contains six (NSERIES) observations when OUTSELECT=OFF, and four (NSELECT) observations when OUTSELECT=ON.
- The observations in OUTALL=ALLON are those for which SELECTED=1 in OUTALL=ALLOFF.
- The time ranges in the OUTBY= data set are computed over all the variables (selected or not) for OUTSELECT=OFF, but only computed over the selected variables for OUTSELECT=ON. This corresponds to computing time ranges over all the series reported in the OUTALL= data set.
- The variable NTIME is the number of time periods between ST_DATE and END_DATE, while NOBS is the number of observations the OUT= data set is to contain. Thus, NTIME is different depending on whether the OUTSELECT= option is set to ON or OFF, while NOBS stays the same.

The KEEP statement in the last two examples illustrates the use of an additional variable, KEPT, in the OUTALL= data sets of [Output 12.4.4](#) and [Output 12.4.6](#). KEPT, which reports the outcome of the KEEP statement, is only added to the OUTALL= data set when there is a KEEP statement.

Adding the RANGE statement to the last example generates the data sets in [Output 12.4.7](#) and [Output 12.4.8](#):

```
filename citidemo "%sysget(DATASRC_DATA)citidem.dat" RECFM=D LRECL=80;
proc datasource filetype=citibase infile=citidemo interval=week
               outby=keyrange out=citiout outselect=on;
  keep WSP;;
  range from '01dec1990'd;
```



```

run;

title1 'Summary Information on Weekly Data for CITIDEMO File';
proc print data=keyrange;
run;

title1 'Weekly Data in CITIDEMO File';
proc print data=citiout;
run;

```

Output 12.4.7 Listing of the OUTBY=KEYRANGE Data Set for FILETYPE=CITIBASE

Summary Information on Weekly Data for CITIDEMO File							
Obs	ST_DATE	END_DATE	NTIME	NOBS	NINRANGE	NSERIES	NSELECT
1	Sun, 29 Dec 1985	Sun, 3 Mar 1991	271	271	15	6	4

Output 12.4.8 Printout of the OUT=CITIOUT Data Set for FILETYPE=CITIBASE

Weekly Data in CITIDEMO File						
Obs	DATE	WSPCA	WSPUA	WSPIA	WSPGLT	
1	Sun, 25 Nov 1990	9.77000	9.66000	9.87000	8.62000	
2	Sun, 2 Dec 1990	9.75000	9.64000	9.85000	8.47000	
3	Sun, 9 Dec 1990	9.59000	9.48000	9.69000	8.22000	
4	Sun, 16 Dec 1990	9.62000	9.51000	9.72000	8.35000	
5	Sun, 23 Dec 1990	9.70000	9.60000	9.80000	8.48000	
6	Sun, 30 Dec 1990	9.64000	9.53000	9.75000	8.31000	
7	Sun, 6 Jan 1991	9.70000	9.59000	9.81000	8.62000	
8	Sun, 13 Jan 1991	9.80000	9.70000	9.89000	8.58000	
9	Sun, 20 Jan 1991	9.66000	9.57000	9.75000	8.36000	
10	Sun, 27 Jan 1991	9.65000	9.56000	9.74000	8.38000	
11	Sun, 3 Feb 1991	9.52000	9.43000	9.61000	8.16000	
12	Sun, 10 Feb 1991	9.38000	9.29000	9.48000	8.14000	
13	Sun, 17 Feb 1991	9.38000	9.29000	9.48000	8.21000	
14	Sun, 24 Feb 1991	9.61000	9.53000	9.68000	8.50000	
15	Sun, 3 Mar 1991	9.61000	9.53000	9.68000	8.50000	

The OUTBY= data set in this last example contains an additional variable NINRANGE. This variable is added since there is a RANGE statement. Its value, 15, is the number of observations in the OUT= data set. In this case, NOBS gives the number of observations the OUT= data set would contain if there were not a RANGE statement.

Example 12.5: DRI Data Delivery Service Database

This example demonstrates the DRIDDS filetype for the daily Federal Reserve Series fxrates_dds. Use VALIDVARNAME=ANY in your SAS options statement to allow special characters such as @, \$, and % to be in the series name. Note the use of long variable names in the OUT= data set in [Output 12.5.2](#) and long labels in the OUTCONT= data set in [Output 12.5.1](#).

The following statements extract daily series starting in January 1,1997:

```
options validvarname=any;
filename datafile "%sysget (DATASRC_DATA)drifxrat.dat" RECFM=F LRECL=80;
proc format;
    value distekfm 0 = 'Unspecified'
                  2 = 'Linear'
                  4 = 'Triag'
                  6 = 'Polynomial'
                  8 = 'Even'
                 10 = 'Step'
                 12 = 'Stocklast'
                 14 = 'LinearUnadjusted'
                 16 = 'PolyUnadjusted'
                 18 = 'StockWithNAS'
                 99 = 'None'
                255 = 'None';

    value convtkfm 0 = 'Unspecified'
                  1 = 'Average'
                  3 = 'AverageX'
                  5 = 'Sum'
                  7 = 'SumAnn'
                  9 = 'StockEnd'
                 11 = 'StockBegin'
                 13 = 'AvgNP'
                 15 = 'MaxNP'
                 17 = 'MinNP'
                 19 = 'StockEndNP'
                 21 = 'StockBeginNP'
                 23 = 'Max'
                 25 = 'Min'
                 27 = 'AvgXNP'
                 29 = 'SumNP'
                 31 = 'SumAnnNP'
                 99 = 'None'
                255 = 'None';
```

```

/*-----*
*               process daily series               *
*-----*/
title3 'Reading DAILY Federal Reserve Series with fxrates_.dds';
proc datasource filetype=dridds
      infile=datafile
      interval=day
      out=fixr
      outcont=fixrcnt
      outall=fixrall;

  keep rx: ;
  range from '01jan97'd to '31dec99'd;
  format disttek distekfm.;
  format convtek convtkfm.;
run;

title1 'CONTENTS of FXRATES_.DDS File, KEEP RX: ';
proc print
  data=fixrcnt;
run;

title1 'Daily Series Available in FXRATES_.DDS File, KEEP RX: ';
proc print
  data=fixr;
run;

```

Output 12.5.1 Listing of the OUTCONT=FIXRCNT Data Set for FILETYPE=DRIDDS

CONTENTS of FXRATES_.DDS File, KEEP RX:						
Obs	NAME	KEPT	SELECTED	TYPE	LENGTH	VARNUM
1	RXA\$%US\$@AU	1	1	1	5	2
2	RXBF%US\$@BE	1	1	1	5	3
3	RXDK%US\$@DK	1	1	1	5	4
Obs	LABEL					FORMAT FORMATL
1	EXCHANGE RATE IN AUSTRALIAN DOLLAR PER US DOLLAR - AUSTRALIA					0
2	EXCHANGE RATE IN BELGIAN FRANCS PER US DOLLAR - BELGIUM					0
3	EXCHANGE RATE IN DANISH KRONE PER 100 US DOLLAR - DENMARK					0
Obs	FORMATD	SOURCEID	DISTTEK	CONVTEK	STATUS	UPDATE UPTIME
1	0	@FACS/DATA.D	Unspecified	Unspecified	0	31JAN97 132605
2	0	@FACS/DATA.D	Unspecified	Unspecified	0	31JAN97 132544
3	0	@FACS/DATA.D	Unspecified	Unspecified	0	31JAN97 132544

Output 12.5.2 Printout of the OUT=FIXR Data Set for FILETYPE=DRIDDS

Daily Series Available in FXRATES_.DDS File, KEEP RX:				
Obs	DATE	RXA\$%US\$ @AU	RXBF%US\$ @BE	RXDK%US\$ @DK
1	01JAN1997	1.26133	31.9200	5.92877
2	02JAN1997	1.26133	31.9200	5.92877
3	03JAN1997	1.26133	31.9200	5.92877
4	04JAN1997	1.27708	32.4620	6.01098
5	05JAN1997	1.27708	32.4620	6.01098
6	06JAN1997	1.27708	32.4620	6.01098
7	07JAN1997	1.27708	32.4620	6.01098
8	08JAN1997	1.27708	32.4620	6.01098
9	09JAN1997	1.27708	32.4620	6.01098
10	10JAN1997	1.27708	32.4620	6.01098
11	11JAN1997	1.28443	32.9360	6.09112
12	12JAN1997	1.28443	32.9360	6.09112
13	13JAN1997	1.28443	32.9360	6.09112
14	14JAN1997	1.28443	32.9360	6.09112
15	15JAN1997	1.28443	32.9360	6.09112
16	16JAN1997	1.28443	32.9360	6.09112
17	17JAN1997	1.28443	32.9360	6.09112
18	18JAN1997	1.29195	33.7500	6.24658
19	19JAN1997	1.29195	33.7500	6.24658
20	20JAN1997	1.29195	33.7500	6.24658
21	21JAN1997	1.29195	33.7500	6.24658
22	22JAN1997	1.29195	33.7500	6.24658
23	23JAN1997	1.29195	33.7500	6.24658
24	24JAN1997	1.29195	33.7500	6.24658
25	25JAN1997	1.30133	33.8974	6.27520
26	26JAN1997	1.30133	33.8974	6.27520
27	27JAN1997	1.30133	33.8974	6.27520
28	28JAN1997	1.30133	33.8974	6.27520
29	29JAN1997	1.30133	33.8974	6.27520
30	30JAN1997	1.30133	33.8974	6.27520
31	31JAN1997	1.30133	33.8974	6.27520

Example 12.6: PC Format CITIBASE Database

This example uses a PC format CITIBASE database (FILETYPE=CITIDISK) to extract annual population estimates for females and males with respect to various age groups.

Population estimate series for all ages of females including those in the armed forces overseas are given by PANF, while PANM gives the population estimate for all ages of males including those in armed forces overseas. More population estimate time series are described in [Output 12.6.1](#) and are output in [Output 12.6.2](#).

The following statements extract the required population estimates series:

```
filename keyfile "%sysget(DATASRC_DATA)basekey.dat" RECFM=V LRECL=22;
filename indfile "%sysget(DATASRC_DATA)baseind.dat" RECFM=F LRECL=84;
filename dbfile "%sysget(DATASRC_DATA)basedb.dat" RECFM=F LRECL=4;

proc datasource filetype=citidisk infile=( keyfile indfile dbfile )
    out=popest outall=popinfo;

run;

proc print data=popinfo;
run;
proc print data=popest;
run;
```

Output 12.6.1 Listing of the OUTALL=POPINFO Data Set for FILETYPE=CITIDISK

Daily Series Available in FXRATES_.DDS File, KEEP RX:										
Obs	NAME	SELECTED	TYPE	LENGTH	VARNUM	BLKNUM				
1	PAN	1	1	5	2	1				
2	PAN17	1	1	5	3	2				
3	PAN18	1	1	5	4	3				
4	PANF	1	1	5	5	4				
5	PANM	1	1	5	6	5				
Obs	LABEL					FORMAT				
1	POPULATION EST.: ALL AGES, INC.ARMED F. OVERSEAS (THOUS.,ANNUAL)									
2	POPULATION EST.: 16 YRS AND OVER,INC ARMED F.OVERSEAS (THOUS,ANNUAL)									
3	POPULATION EST.: 18-64 YRS,INC.ARMED F.OVERSEAS (THOUS,ANNUAL)									
4	POPULATION EST.: FEMALES,ALL AGES,INC.ARMED F.O'SEAS (THOUS.,ANN)									
5	POPULATION EST.: MALES, ALL AGES, INC.ARMED F.O'SEAS (THOUS.,ANN)									
Obs	FORMATL	FORMATD	ST_DATE	END_DATE	NTIME	NOBS	DISKNUM	ATTRIBUT	NDEC	AGGREGAT
1	0	0	1980	1989	10	10	1	1	0	0
2	0	0	1980	1989	10	10	1	1	0	0
3	0	0	1980	1989	10	10	1	1	0	0
4	0	0	1980	1989	10	10	1	1	0	0
5	0	0	1980	1989	10	10	1	1	0	0

Output 12.6.2 Printout of the OUT=POPEST Data Set for FILETYPE=CITIDISK

Daily Series Available in FXRATES_.DDS File, KEEP RX:						
Obs	DATE	PAN	PAN17	PAN18	PANF	PANM
1	1980	227757	172456	138358	116869	110888
2	1981	230138	175017	140618	118074	112064
3	1982	232520	177346	142740	119275	113245
4	1983	234799	179480	144591	120414	114385
5	1984	237001	181514	146257	121507	115494
6	1985	239279	183583	147759	122631	116648
7	1986	241625	185766	149149	123795	117830
8	1987	243942	187988	150542	124945	118997
9	1988	246307	189867	152113	126118	120189
10	1989	248762	191570	153695	127317	121445

This example demonstrates the following:

- The INFILE= options lists the filerefs of the key, index, and database files, in that order.
- The INTERVAL= option is omitted since the default interval for CITIDISK type files is YEAR.

Example 12.7: Quarterly COMPUSTAT Data Files

This example shows how to extract data from a 48-quarter Compustat Database File. For COMPUSTAT data files, the series variable names are constructed by concatenating the name of the data array DATA and the column number containing the required information. For example, for quarterly files the common stock data is in column 56. Therefore, the variable name for this series is DATA56. Similarly, the series variable names for quarterly footnotes are constructed by adding the column number to the array name, QFTNT. For example, the variable name for common stock footnotes is QFTNT14 since the 14th column of the QFTNT array contains this information.

The following example extracts common stock series (DATA56) and its footnote (QFTNT14) for companies whose stocks are traded over-the-counter and not in the S&P 500 Index (ZLIST=06) and whose data reside in the over-the-counter file (FILE=06).

```
filename compstat "%sysget(DATASRC_DATA)csqibm.dat" recfm=s370v
  lrecl=4820 blksize=14476;
proc datasource filetype=cs48qibm infile=compstat
  out=stocks outby=company;
  keep data56 qftnt14;
  rename data56=comstock qftnt14=ftcomstk;
  label data56='Common Stock'
        qftnt14='Footnote for Common Stock';
  range from 1990:4;

run;

/*- add company name to the out= data set */
data stocks;
  merge stocks company( keep=dnum cnum cic coname );
  by dnum cnum cic;
run;

title1 'Common Stocks for Last Quarter of 1990';
proc print data=stocks ;
run;
```

Output 12.7.1 contains a listing of the STOCKS data set.

Output 12.7.1 Listing of the OUT=STOCKS Data Set

Common Stocks for Last Quarter of 1990											
Obs	DNUM	CNUM	CIC	FILE	EIN	STK	SMBL	ZLIST	XREL	FIC	INCORP
1	2670	293308	102	6	56-0481457	0	ENGH	6	0	0	10
2	2835	372917	104	6	06-1047163	0	GENZ	6	0	0	10
3	3564	896726	106	6	25-0922753	0	TRON	6	0	0	42
4	3576	172755	100	6	77-0024818	0	CRUS	6	0	0	6
5	3577	602191	108	6	11-2693062	0	MILT	6	0	0	10
6	3630	616350	104	6	34-0299600	0	MORF	6	0	0	39
7	3674	827079	203	6	94-1527868	0	SILI	6	0	0	10
8	3842	602720	104	6	25-0668780	0	MNES	6	0	0	42
9	5080	007698	103	6	59-1001822	0	AESM	6	0	0	12
10	5122	090324	104	6	84-0601662	0	BIND	6	0	0	18
11	5211	977865	104	6	38-1746752	0	WLHN	6	0	0	26
12	5600	299155	101	6	36-1050870	0	EVAN	6	0	0	10
13	5731	382091	106	6	94-2366177	0	GGUY	6	0	0	6
14	7372	45812M	104	6	94-2658153	0	INTS	6	0	0	6
15	7372	566140	109	6	04-2711580	0	MCAM	6	0	0	25
16	7373	913077	103	6	81-0422894	0	TOTE	6	0	0	10
17	7510	008450	108	6	34-1050582	0	AGNC	6	0	0	10
18	7819	026038	307	6	23-2359277	0	AFTI	6	0	0	10
19	8700	055383	103	6	59-1781257	0	BEIH	6	0	0	10
20	8731	759916	109	6	04-2729386	0	RGEN	6	0	0	10

Obs	STATE	COUNTY	DATE	comstock	ftcomstk	CONAME
1	13	121	1990:4	16.2510		ENGRAPH INC
2	25	17	1990:4	0.1620		GENZYME CORP
3	37	105	1990:4	3.1380		TRION INC
4	6	85	1990:4	.		CIRRUS LOGIC INC
5	36	103	1990:4	.		MILTOPE GROUP INC
6	39	35	1990:4	.		MOR-FLO INDS
7	6	85	1990:4	.		SILICONIX INC
8	42	3	1990:4	6.7540		MINE SAFETY APPLIANCES CO
9	12	25	1990:4	.		AERO SYSTEMS INC
10	18	97	1990:4	3.2660		BINDLEY WESTERN INDS
11	26	145	1990:4	6.4800		WOLOHAN LUMBER CO
12	17	31	1990:4	.		EVANS INC
13	6	75	1990:4	0.0520		GOOD GUYS INC
14	6	85	1990:4	.		INTEGRATED SYSTEMS INC
15	25	17	1990:4	0.0770		MARCAM CORPORATION
16	30	111	1990:4	0.0570		UNITED TOTE INC
17	39	35	1990:4	.		AGENCY RENT-A-CAR INC
18	42	45	1990:4	0.0210		AMERICAN FILM TECHNOL
19	13	121	1990:4	0.5170		BEI HOLDINGS LTD
20	25	17	1990:4	.		REPLIGEN CORP

Note that quarterly Compustat data are also available in Universal Character format. If you have this type of file instead of IBM 360/370 General format, use the FILETYPE=CS48QUC option instead.

Example 12.8: Annual COMPUSTAT Data Files, V9.2 New Filetype CSAUC3

Annual COMPUSTAT data in Universal Character format is read for PRICES since the year 2002, so that the desired output show the PRICE (HIGH), PRICE (LOW), and PRICE (CLOSE) for each company.

```
filename datafile "%sysget(DATASRC_DATA)csauy3.dat" RECFM=F LRECL=13612;
/*-----*
 * create OUT=csauy3 data set with ASCII 2003 Industrial Data  *
 * compare it with the OUT=csauc data set created by DATA STEP *
 *-----*/

proc datasource filetype=csauy3 ascii
    infile=datafile
    interval=year
    outselect=on
    outkey=y3key
    out=csauy3;

    keep data197-data199 label;
    range from 2002;
run;

proc sort
    data=csauy3 out=csauy3;
    by dnum cnum cic file zlist smbl xrel stk;
run;

title1 'Price, High, Low and Close for Range from 2002';
proc contents data=csauy3;
run;

proc print data=csauy3;
run;
```

[Output 12.8.1](#) shows information on the contents of the CSAUY3 data set while [Output 12.8.2](#) shows a listing of the CSAUY3 data set.

Output 12.8.1 Listing of the CONTENTS of OUT=CSAUY3 Data Set

Price, High, Low and Close for Range from 2002					
The CONTENTS Procedure					
Alphabetic List of Variables and Attributes					
#	Variable	Type	Len	Format	Label
3	CIC	Char	3		
2	CNUM	Char	6		
11	COUNTY	Num	5		
13	CPSPIN	Char	1		
15	CSSPII	Char	1		
14	CSSPIN	Char	2		
18	DATA197	Num	5		Price - Fiscal Year - High (\$&c,NA)
19	DATA198	Num	5		Price - Fiscal Year - Low (\$&c,NA)
20	DATA199	Num	5		Price - Close - Fiscal Year-End (\$&c,NA)
17	DATE	Num	4	YEAR4.	Date of Observation
1	DNUM	Num	5		
9	DUPFILE	Num	5		
16	EIN	Char	10		
4	FILE	Num	5		
12	FINC	Num	5		
6	SMBL	Char	8		
10	STATE	Num	5		
8	STK	Num	5		
7	XREL	Num	5		
5	ZLIST	Num	5		

Output 12.8.2 Listing of the OUT=CSAU3 Data Set

Price, High, Low and Close for Range from 2002												
Obs	DNUM	CNUM	CIC	FILE	ZLIST	SMBL	XREL	STK	DUPFILE	STATE	COUNTY	FINC
1	3089	899896	104	11	1	TUP	444	0	0	12	95	0
2	3089	899896	104	11	1	TUP	444	0	0	12	95	0
3	3674	032654	105	11	1	ADI	928	0	0	25	21	0
4	3674	032654	105	11	1	ADI	928	0	0	25	21	0
5	3842	053801	106	1	5	AVR	0	0	0	25	21	0
6	3842	053801	106	1	5	AVR	0	0	0	25	21	0
7	6035	149547	101	3	25	CAVB	0	0	0	47	149	0
8	6035	149547	101	3	25	CAVB	0	0	0	47	149	0
9	6211	617446	448	11	1	MWD	725	0	0	36	61	0
10	6211	617446	448	11	1	MWD	725	0	0	36	61	0
11	6726	09247M	105	1	4	BMN	0	0	0	34	13	0
12	6726	09247M	105	1	4	BMN	0	0	0	34	13	0
13	7011	54021P	205	1	5	LGN	0	0	0	13	121	0
14	7011	54021P	205	1	5	LGN	0	0	0	13	121	0
15	7370	35921T	108	1	5	FNT	0	0	0	36	87	0
16	7370	35921T	108	1	5	FNT	0	0	0	36	87	0
17	7370	459200	101	11	1	IBM	903	0	0	36	119	0
18	7370	459200	101	11	1	IBM	903	0	0	36	119	0
19	7812	591610	100	1	4	MGM	0	0	0	6	37	0
20	7812	591610	100	1	4	MGM	0	0	0	6	37	0

Obs	CPSPIN	CSSPIN	CSSPII	EIN	DATE	DATA197	DATA198	DATA199
1	1	10		36-4062333	2002	24.990	14.4000	15.0800
2	1	10		36-4062333	2003	.	.	.
3	1	10		04-2348234	2002	48.840	17.8800	26.8000
4	1	10		04-2348234	2003	.	.	.
5				06-1174053	2002	1.500	0.2200	0.2300
6				06-1174053	2003	.	.	.
7				62-1721072	2002	14.000	11.5810	13.3400
8				62-1721072	2003	.	.	.
9	1	10	1	36-3145972	2002	60.020	28.8010	45.2400
10	1	10	1	36-3145972	2003	.	.	.
11					2002	11.050	10.3700	11.0100
12					2003	.	.	.
13				52-2093696	2002	13.894	1.0084	13.8940
14				52-2093696	2003	.	.	.
15				13-3950283	2002	0.440	0.1200	0.2600
16				13-3950283	2003	.	.	.
17	1	10	1	13-0871985	2002	126.390	54.0100	77.5000
18	1	10	1	13-0871985	2003	.	.	.
19				95-4605850	2002	23.250	9.0000	13.0000
20				95-4605850	2003	.	.	.

Note that annual COMPUSTAT data are available in either IBM 360/370 General format or Universal Character format. The first example expects an IBM 360/370 General format file since the FILETYPE= is set to CSAIBM, while the second example uses a Universal Character format file (FILETYPE=CSAUC).

Example 12.9: CRSP Daily NYSE/AMEX Combined Stocks

This sample code reads all the data on a three-volume daily NYSE/AMEX combined character data set. Assume that the following filerefs are assigned to the calendar/indices file and security files that this database comprises:

Fileref	VOLSER	File Type
calfile	DXAA1	calendar/indices file on volume 1
secfile1	DXAA1	security file on volume 1
secfile2	DXAA2	security file on volume 2
secfile3	DXAA3	security file on volume 3

The data set CALDATA is created by the following statements to contain the calendar/indices file:

```
proc datasource filetype=crspdc i infile=calfile out=caldata;
run;
```

Here the FILETYPE=CRSPDCI indicates that you are reading a character format (indicated by a C in the 6th position) daily (indicated by a D in the 5th position) calendar/indices file (indicated by an I in the 7th position).

The annual data in security files can be obtained by the following statements:

```
proc datasource filetype=crspdca
      infile=( secfile1 secfile2 secfile3 )
      out=annual;
run;
```

Similarly, the data sets to contain the daily security data (the OUT= data set) and the event data (the OUT=EVENT= data set) are obtained by the following statements:

```
proc datasource filetype=crspdc s
      infile=( calfile secfile1 secfile2 secfile3 )
      out=periodic index outevent=events;
run;
```

Note that the FILETYPE= has an S in the 7th position, since you are reading the security files. Also, the INFILE= option first expects the fileref of the calendar/indices file since the dating variable (CALDT) is contained in that file. Following the fileref of calendar/indices file, you give the list of security files in the order in which you want to read them. When data span more than one physical volume, the filerefs of the security files residing on each volume must be given following the fileref of the calendar/indices file. The DATASOURCE procedure reads each of these files in the order in which they are specified. Therefore, you can request that all three volumes be mounted to the same drive, if you choose to do so.

This sample code illustrates the following points:

- The INDEX option in the second PROC DATASOURCE run creates an index file for the OUT=PERIODIC data set. This index file provides random access to the OUT= data set and may increase the efficiency of the subsequent PROC and DATA steps that use BY and WHERE statements.

The index variables are CUSIP, CRSP permanent number (PERMNO), NASDAQ company number (COMPNO), NASDAQ issue number (ISSUNO), header exchange code (HEXCD), and header SIC code (HSICCD). Each one of these variables forms a different key which is a single index. If you want to form keys from a combination of variables (composite indexes) or use some other variables as indexes, you should use the INDEX= data set option for the OUT= data set.

- The OUTEVENT=EVENTS data set is sparse. In fact, for each EVENT type, a unique set of event variables are defined. For example, for EVENT='SHARES', only the variables SHROUT and SHRFLG are defined, and they have missing values for all other EVENT types. Pictorially, this structure is similar to the data set shown in [Figure 12.4](#). Because of this sparse representation, you should create the OUTEVENT= data set only when you need a subset of securities and events.

By default, the OUT= data set contains only the periodic data. However, you may also want to include the event-oriented data in the OUT= data set. This is accomplished by listing the event variables together with periodic variables in a KEEP statement. For example, if you want to extract the historical CUSIP (NCUSIP), number of shares outstanding (SHROUT), and dividend cash amount (DIVAMT) together with all the periodic series, use the following statements.

```
proc datasource filetype=crspdcx
    infile=( calfile secfile1 secfile2 secfile3 )
    out=both outevent=events;
    where cusip='09523220';
    keep bidlo askhi prc vol ret sxret bxret ncusip shrou t divamt;
run;
```

The KEEP statement has no effect on the event variables output to the OUTEVENT= data set. If you want to extract only a subset of event variables, you need to use the KEEPEVENT statement. For example, the following sample code outputs only NCUSIP and SHROUT to the OUTEVENT= data set for CUSIP='09523220':

```
proc datasource filetype=crspdcx
    infile=( calfile secfile )
    outevent=subevts;
    where cusip='09523220';
    keepevent ncusip shrou t;
run;
```

[Output 12.9.1](#), [Output 12.9.2](#), [Output 12.9.3](#), and [Output 12.9.4](#) show how to read the CRSP Daily NYSE/AMEX Combined ASCII Character Files.

```
filename dxci "%sysget(DATASRC_DATA)dxccal95.dat" RECFM=F LRECL=130;
filename dxc "%sysget(DATASRC_DATA)dxcsb95.dat" RECFM=F LRECL=400;

/*--- create output data sets from character format DX files ---*/
/* create securities output data sets using DATASOURCE -----*/
/* statements                                                    */
proc datasource filetype=crspdcx  ascii
    infile=( dxci dxc )
    interval=day
    outcont=dxccont
    outkey=dxckey
    outall=dxcall
```

```

out=dx
outevent=dxcevent
outselect=off;
range from '15aug95'd to '28aug95'd ;
where cusip in ('12709510','35614220');
run;

title1 'Date Range 15aug95-28aug95 ';

title3 'DX Security File Outputs';
title4 'OUTKEY= Data Set';
proc print data=dxkey;
run;

title4 'OUTCONT= Data Set';
proc print data=dxcont;
run;

title4 "Listing of OUT= Data Set for cusip in ('12709510','35614220')";
proc print data=dx;
run;

title4 "Listing of OUTEVENT= Data Set for cusip in ('12709510','35614220')";
proc print data=dxcevent;
run;

```

Output 12.9.1 Listing of the OUTBY= Data Set with OUTSELECT=OFF

Date Range 15aug95-28aug95													
DX Security File Outputs													
OUTKEY= Data Set													
						B		E				N	
						Y	S	N				I	N N
		P	C	I	H	S	T	D				N	S S
	C	E	O	S	H	S	E	—	—	N		R	E E
	U	R	M	S	E	I	L	D	D	T	N	A	R L
O	S	M	P	U	X	C	E	A	A	I	O	N	I E
b	I	N	N	N	C	C	C	T	T	M	B	G	E C
s	P	O	O	O	D	D	T	E	E	E	S	E	S T
1	68391610	10000	7952	9787	3	3990	0	07JAN1986	11JUN1987	521	0	0	35 7
2	12709510	10010	7967	9809	3	3840	1	17JAN1986	28AUG1995	3511	2431	10	35 7
3	49307510	10020	7972	9824	3	6710	0	27JAN1986	30APR1993	2651	0	0	35 7
4	00338690	10030	22160	0	1	3310	0	02JUL1962	26DEC1968	2370	0	0	35 7
5	41741F20	10040	7988	9846	3	6210	0	07FEB1986	15JUN1989	1225	0	0	35 7
6	00074210	10050	13	11	3	3448	0	29DEC1972	16JUN1978	1996	0	0	35 7
7	35614220	10060	8007	9876	3	1040	1	24FEB1986	29DEC1995	3596	2492	10	35 7

Output 12.9.2 Listing of the OUTCONT= Data Set

Date Range 15aug95-28aug95												
DX Security File Outputs												
OUTCONT= Data Set												
		S									F	F
		E									O	O
		L			L	V						
		E			E	A		L			O	R
	N	K	C	T	N	R		A			R	M
O	A	E	T	Y	G	N		B			M	A
b	M	P	E	P	T	U		E			A	T
s	E	T	D	E	H	M		L			T	L
1	BIDLO	1	1	1	6	8	Bid or Low				0	0
2	ASKHI	1	1	1	6	9	Ask or High				0	0
3	PRC	1	1	1	6	10	Closing Price of Bid/Ask average				0	0
4	VOL	1	1	1	6	11	Share Volume				0	0
5	RET	1	1	1	6	12	Holding Period Return				0	0
6	SXRET	1	1	1	6	13	Standard Deviation Excess Return				0	0
7	BXRET	1	1	1	6	14	Beta Excess Return				0	0
8	NCUSIP	0	0	2	8	.	Name CUSIP				0	0
9	TICKER	0	0	2	5	.	Exchange Ticker Symbol				0	0
10	COMNAM	0	0	2	32	.	Company Name				0	0
11	SHRCLS	0	0	2	1	.	Share Class				0	0
12	SHRCD	0	0	1	6	.	Share Code				0	0
13	EXCHCD	0	0	1	6	.	Exchange Code				0	0
14	SICCD	0	0	1	6	.	Standard Industrial Classification Code				0	0
15	DISTCD	0	0	1	6	.	Distribution Code				0	0
16	DIVAMT	0	0	1	6	.	Dividend Cash Amount				0	0
17	FACPR	0	0	1	6	.	Factor to adjust price				0	0
18	FACSHR	0	0	1	6	.	Factor to adjust shares outstanding				0	0
19	DCLRDT	0	0	1	6	.	Declaration date	DATE	7	0		
20	RCRDDT	0	0	1	6	.	Record date	DATE	7	0		
21	PAYDT	0	0	1	6	.	Payment date	DATE	7	0		
22	SHROUT	0	0	1	6	.	Number of shares outstanding				0	0
23	SHRFLG	0	0	1	6	.	Share flag				0	0
24	DLSTCD	0	0	1	6	.	Delisting code				0	0
25	NWPERM	0	0	1	6	.	New CRSP permanent number				0	0
26	NEXTDT	0	0	1	6	.	Date of next available information	DATE	7	0		
27	DLBID	0	0	1	6	.	Delisting bid				0	0
28	DLASK	0	0	1	6	.	Delisting ask				0	0
29	DLPRC	0	0	1	6	.	Delisting price				0	0
30	DLVOL	0	0	1	6	.	Delisting volume				0	0
31	DLRET	0	0	1	6	.	Delisting return				0	0
32	TRTSCD	0	0	1	6	.	Traits code				0	0
33	NMSIND	0	0	1	6	.	National Market System Indicator				0	0
34	MMCNT	0	0	1	6	.	Market maker count				0	0
35	NSDINX	0	0	1	6	.	NASD index				0	0

Output 12.9.3 Listing of the OUT= Data Set with OUTSELECT=OFF for CUSIPs 12709510 and 35614220

Date Range 15aug95–28aug95							
DX Security File Outputs							
Listing of OUT= Data Set for cusip in ('12709510','35614220')							
Obs	CUSIP	PERMNO	COMPNO	ISSUNO	HEXCD	HSICCD	DATE
1	12709510	10010	7967	9809	3	3840	15AUG1995
2	12709510	10010	7967	9809	3	3840	16AUG1995
3	12709510	10010	7967	9809	3	3840	17AUG1995
4	12709510	10010	7967	9809	3	3840	18AUG1995
5	12709510	10010	7967	9809	3	3840	21AUG1995
6	12709510	10010	7967	9809	3	3840	22AUG1995
7	12709510	10010	7967	9809	3	3840	23AUG1995
8	12709510	10010	7967	9809	3	3840	24AUG1995
9	12709510	10010	7967	9809	3	3840	25AUG1995
10	12709510	10010	7967	9809	3	3840	28AUG1995
11	35614220	10060	8007	9876	3	1040	15AUG1995
12	35614220	10060	8007	9876	3	1040	16AUG1995
13	35614220	10060	8007	9876	3	1040	17AUG1995
14	35614220	10060	8007	9876	3	1040	18AUG1995
15	35614220	10060	8007	9876	3	1040	21AUG1995
16	35614220	10060	8007	9876	3	1040	22AUG1995
17	35614220	10060	8007	9876	3	1040	23AUG1995
18	35614220	10060	8007	9876	3	1040	24AUG1995
19	35614220	10060	8007	9876	3	1040	25AUG1995
20	35614220	10060	8007	9876	3	1040	28AUG1995
Obs	BIDLO	ASKHI	PRC	VOL	RET	SXRET	BXRET
1	7.500	7.8750	7.5625	29200	-0.008197	.	.
2	7.500	7.8750	7.5000	22365	-0.008264	.	.
3	7.500	7.8750	7.5000	33416	0.000000	.	.
4	7.375	7.5000	7.3750	16666	-0.016667	.	.
5	7.375	7.3750	7.3750	9382	0.000000	.	.
6	7.250	7.3750	7.2500	33674	-0.016949	.	.
7	7.250	7.3750	7.3125	22371	0.008621	.	.
8	7.125	7.5000	7.1250	38621	-0.025641	.	.
9	6.875	7.3750	7.0000	29713	-0.017544	.	.
10	7.000	7.1250	7.0000	38798	0.000000	.	.
11	12.375	12.6875	12.3750	39136	0.000000	.	.
12	12.125	12.3750	12.2031	45916	-0.013889	.	.
13	12.250	12.3125	12.2500	43644	0.003841	.	.
14	12.250	12.6250	12.3750	11027	0.010204	.	.
15	12.375	12.6250	12.3750	7378	0.000000	.	.
16	12.250	12.3750	12.2500	99655	-0.010101	.	.
17	12.125	12.2500	12.1250	95148	-0.010204	.	.
18	12.125	12.3750	12.3750	185572	0.020619	.	.
19	12.000	12.2500	12.0000	9575	-0.030303	.	.
20	12.000	12.0625	12.0625	12854	0.005208	.	.

Output 12.9.4 Listing of the OUTEVENT= Data Set in Range 15aug95-28aug95

Date Range 15aug95-28aug95												
DX Security File Outputs												
Listing of OUTEVENT= Data Set for cusip in ('12709510','35614220')												
	P	C	I	H				N	T	C	S	E
C	E	O	S	H	S	E		C	I	O	H	S
U	R	M	S	E	I	V	D	U	C	M	R	H
O	S	M	P	U	X	C	E	A	S	K	N	C
b	I	N	N	N	C	C	N	T	I	E	A	L
s	P	O	O	O	D	D	T	E	P	R	M	S
1	12709510	10010	7967	9809	3	3840	DELIST	28AUG1995				
2	12709510	10010	7967	9809	3	3840	NASDIN	24AUG1995				
	D	R		S	S	D	N	N				T
C	C		P	H	H	L	W	E	D	D	D	D
L	R		A	R	R	S	P	X	L	L	L	L
O	R	D	Y	O	F	T	E	T	B	A	P	V
b	D	D	D	U	L	C	R	D	I	S	R	O
s	T	T	T	T	G	D	M	T	D	K	C	L
1	203	23588	.	.	0	.	0.037500
2	1 2 17 2

Note in [Output 12.9.4](#) that there were no events in range for cusip 35614220. See Chapter 38, “[The SASE-CRSP Interface Engine](#),” for more on CRSPAccess Data access.

References

Bureau of Economic Analysis (1986), *The National Income and Product Accounts of the United States, 1929-82*, U.S. Dept of Commerce, Washington, DC.

Bureau of Economic Analysis (1987), *Index of Items Appearing in the National Income and Product Accounts Tables*, U.S. Dept of Commerce, Washington, DC.

Bureau of Economic Analysis (1991), *Survey of Current Business*, U.S. Dept of Commerce, Washington, DC.

Bureau of Labor Statistics, Washington, DC. [<http://www.bls.gov/>]

Center for Research in Security Prices (2006), *CRSP Data Description Guide*, Chicago, IL.

Center for Research in Security Prices (2006), *CRSP Fortran-77 to Fortran-95 Migration Guide*, Chicago, IL.

Center for Research in Security Prices (2006), *CRSP Programmer's Guide*, Chicago, IL.

Center for Research in Security Prices (2006), *CRSP Utilities Guide*, Chicago, IL.

Center for Research in Security Prices (2000), *CRSP SFA Guide*, Chicago, IL.

Citibank (1990), *CITIBASE Directory*, New York, NY.

Citibank (1991), *CITIBASE-Weekly*, New York, NY.

Citibank (1991), *CITIBASE-Daily*, New York, NY.

DRI/McGraw-Hill (1997), *DataLink*, Lexington, MA.

DRI/McGraw-Hill Data Search and Retrieval for Windows (1996), *DRIPRO User's Guide*, Lexington, MA.

FAME Information Services (1995), *User's Guide to FAME*, Ann Arbor, Michigan

Haver Analytics, New York, NY. [<http://www.haver.com/>]

International Monetary Fund (1984), *IMF Documentation on Computer Subscription*, Washington, DC.

Organization For Economic Cooperation and Development (1992) *Annual National Accounts: Volume I. Main Aggregates Content Documentation*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Annual National Accounts: Volume II. Detailed Tables Technical Documentation*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Main Economic Indicators Database Note*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Main Economic Indicators Inventory*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Main Economic Indicators OECD Statistics Document*, Paris, France.

Organization For Economic Cooperation and Development (1992) *OECD Statistical Information Research and Inquiry System Documentation*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Quarterly National Accounts Inventory of Series Codes*, Paris, France.

Organization For Economic Cooperation and Development (1992) *Quarterly National Accounts Technical Documentation*, Paris, France.

Standard & Poor's Compustat Services Inc. (1991), *COMPUSTAT II Documentation*, Englewood, CO.

Standard & Poor's Compustat Services Inc. (2003), *COMPUSTAT Technical Guide*, Englewood, CO.

Chapter 13

The ENTROPY Procedure (Experimental)

Contents

Overview: ENTROPY Procedure	690
Getting Started: ENTROPY Procedure	692
Simple Regression Analysis	692
Using Prior Information	699
Pure Inverse Problems	703
Analyzing Multinomial Response Data	708
Syntax: ENTROPY Procedure	712
Functional Summary	712
PROC ENTROPY Statement	714
BOUNDS Statement	717
BY Statement	719
ID Statement	719
MODEL Statement	720
PRIORS Statement	721
RESTRICT Statement	721
TEST Statement	722
WEIGHT Statement	723
Details: ENTROPY Procedure	724
Generalized Maximum Entropy	724
Generalized Cross Entropy	725
Moment Generalized Maximum Entropy	727
Maximum Entropy-Based Seemingly Unrelated Regression	728
Generalized Maximum Entropy for Multinomial Discrete Choice Models	730
Censored or Truncated Dependent Variables	731
Information Measures	732
Parameter Covariance For GCE	733
Parameter Covariance For GCE-M	733
Statistical Tests	734
Missing Values	735
Input Data Sets	736
Output Data Sets	737
ODS Table Names	738
ODS Graphics	739
Examples: ENTROPY Procedure	739

Example 13.1: Nonnormal Error Estimation	739
Example 13.2: Unreplicated Factorial Experiments	741
Example 13.3: Censored Data Models in PROC ENTROPY	745
Example 13.4: Use of the PDATA= Option	747
Example 13.5: Illustration of ODS Graphics	749
References	751

Overview: ENTROPY Procedure

The ENTROPY procedure implements a parametric method of linear estimation based on generalized maximum entropy. The ENTROPY procedure is suitable when there are outliers in the data and robustness is required, when the model is ill-posed or under-determined for the observed data, or for regressions that involve small data sets.

The main features of the ENTROPY procedure are as follows:

- estimation of simultaneous systems of linear regression models
- estimation of Markov models
- estimation of seemingly unrelated regression (SUR) models
- estimation of unordered multinomial discrete Choice models
- solution of pure inverse problems
- allowance of bounds and restrictions on parameters
- performance of tests on parameters
- allowance of data and moment constrained generalized cross entropy

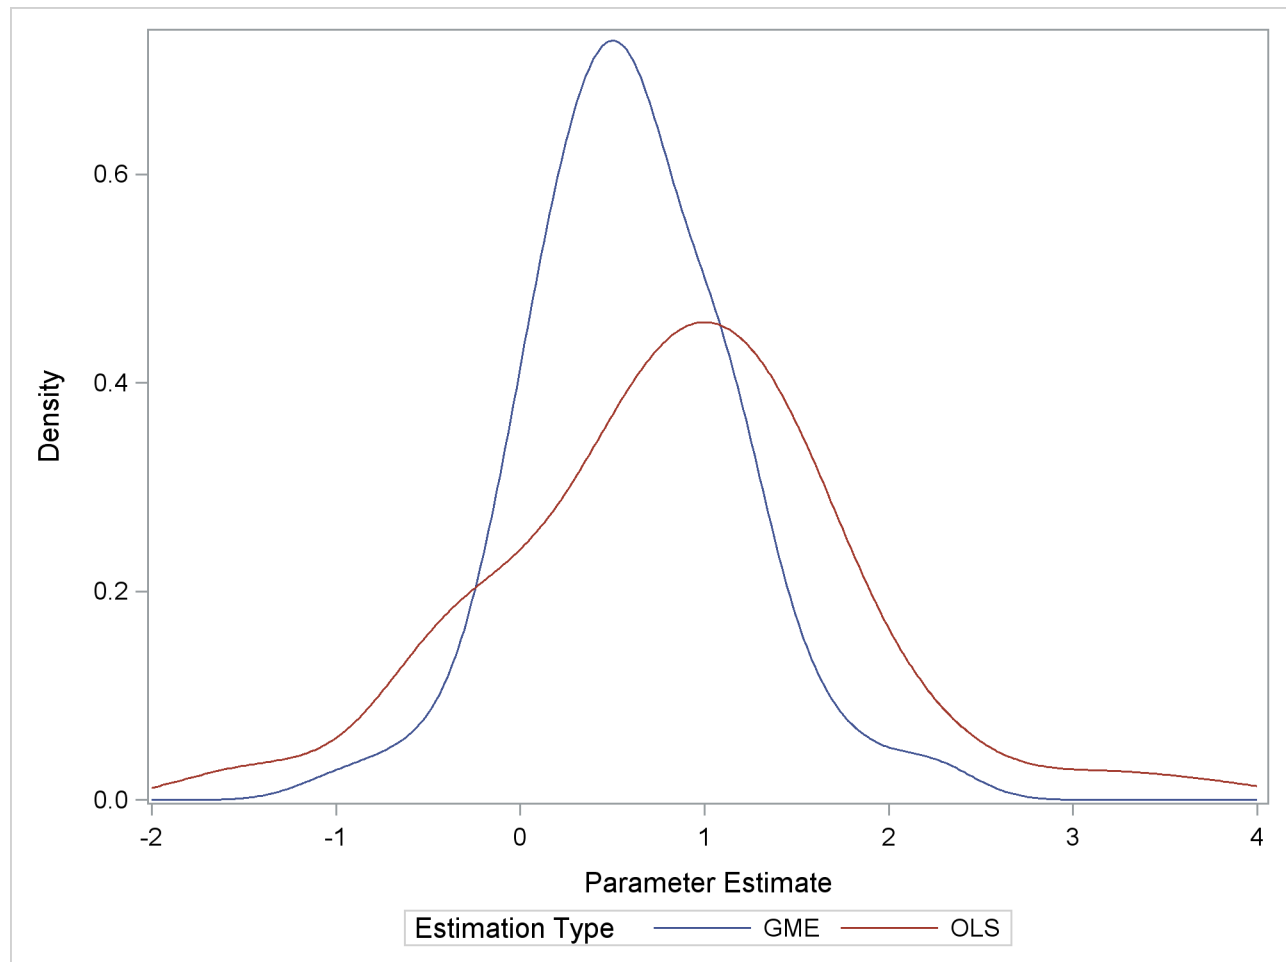
It is often the case that the statistical/economic model of interest is ill-posed or under-determined for the observed data. For the general linear model, this can imply that high degrees of collinearity exist among explanatory variables or that there are more parameters to estimate than observations available to estimate them. These conditions lead to high variances or non-estimability for traditional generalized least squares (GLS) estimates.

Under these situations it might be in the researcher's or practitioner's best interest to consider a nontraditional technique for model fitting. The principle of maximum entropy is the foundation for an estimation methodology that is characterized by its robustness to ill-conditioned designs and its ability to fit overparameterized models. See Mittelhammer, Judge, and Miller (2000) and Golan, Judge, and Miller (1996) for a discussion of Shannon's maximum entropy measure and the related Kullback-Leibler information.

Generalized maximum entropy (GME) is a means of selecting among probability distributions to choose the distribution that maximizes uncertainty or uniformity remaining in the distribution, subject to information

already known about the distribution. Information takes the form of data or moment constraints in the estimation procedure. PROC ENTROPY creates a GME distribution for each parameter in the linear model, based upon support points supplied by the user. The mean of each distribution is used as the estimate of the parameter. Estimates tend to be biased, as they are a type of shrinkage estimate, but typically portray smaller variances than ordinary least squares (OLS) counterparts, making them more desirable from a mean squared error viewpoint (see Figure 13.1).

Figure 13.1 Distribution of Maximum Entropy Estimates versus OLS



Maximum entropy techniques are most widely used in the econometric and time series fields. Some important uses of maximum entropy include the following:

- size distribution of firms
- stationary Markov Process
- social accounting matrix (SAM)
- consumer brand preference
- exchange rate regimes

- wage-dependent firm relocation
- oil market dynamics

Getting Started: ENTROPY Procedure

This section introduces the ENTROPY procedure and shows how to use PROC ENTROPY for several kinds of statistical analyses.

Simple Regression Analysis

The ENTROPY procedure is similar in syntax to the other regression procedures in SAS. To demonstrate the similarity, suppose the endogenous/dependent variable is y , and x_1 and x_2 are two exogenous/independent variables of interest. To estimate the parameters in this single equation model using PROC ENTROPY, use the following SAS statements:

```
proc entropy;
  model y = x1 x2;
run;
```

Test Scores Data Set

Consider the following test score data compiled by Coleman et al. (1966):

```
title "Test Scores compiled by Coleman et al. (1966)";
data coleman;
  input test_score 6.2 teach_sal 6.2 prcnt_prof 8.2
        socio_stat 9.2 teach_score 8.2 mom_ed 7.2;
  label test_score="Average sixth grade test scores in observed district";
  label teach_sal="Average teacher salaries per student (1000s of dollars)";
  label prcnt_prof="Percent of students' fathers with professional employment";
  label socio_stat="Composite measure of socio-economic status in the district";
  label teach_score="Average verbal score for teachers";
  label mom_ed="Average level of education (years) of the students' mothers";
datalines;

... more lines ...
```

This data set contains outliers, and the condition number of the matrix of regressors, \mathbf{X} , is large, which indicates collinearity among the regressors. Since the maximum entropy estimates are both robust with respect to the outliers and also less sensitive to a high condition number of the \mathbf{X} matrix, maximum entropy estimation is a good choice for this problem.

To fit a simple linear model to this data by using PROC ENTROPY, use the following statements:

```
proc entropy data=coleman;
  model test_score = teach_sal prcnt_prof socio_stat teach_score mom_ed;
run;
```

This requests the estimation of a linear model for TEST_SCORE with the following form:

$$\text{test_score} = \text{intercept} + a * \text{teach_sal} + b * \text{prcnt_prof} + c * \text{socio_stat} \\ + d * \text{teach_score} + e * \text{mom_ed} + \epsilon;$$

This estimation produces the “Model Summary” table in [Figure 13.2](#), which shows the equation variables used in the estimation.

Figure 13.2 Model Summary Table

Test Scores compiled by Coleman et al. (1966)				
The ENTROPY Procedure				
Variables (Supports (Weights))	teach_sal	prcnt_prof	socio_stat	
	teach_score	mom_ed	Intercept	
Equations (Supports (Weights))	test_score			

Since support points and prior weights are not specified in this example, they are not shown in the “Model Summary” table. The next four pieces of information displayed in [Figure 13.3](#) are: the “Data Set Options,” the “Minimization Summary,” the “Final Information Measures,” and the “Observations Processed.”

Figure 13.3 Estimation Summary Tables

Test Scores compiled by Coleman et al. (1966)				
The ENTROPY Procedure				
GME-M Estimation Summary				
Data Set Options				
DATA=	WORK.COLEMAN			
Minimization Summary				
Parameters Estimated		6		
Covariance Estimator		GME-M		
Entropy Type		Shannon		
Entropy Form		Dual		
Numerical Optimizer		Quasi Newton		

Figure 13.3 continued

Final Information Measures	
Objective Function Value	9.553699
Signal Entropy	9.569484
Noise Entropy	-0.01578
Normed Entropy (Signal)	0.990976
Normed Entropy (Noise)	0.999786
Parameter Information Index	0.009024
Error Information Index	0.000214
Observations Processed	
Read	20
Used	20

The item labeled “Objective Function Value” is the value of the entropy estimation criterion for this estimation problem. This measure is analogous to the log-likelihood value in a maximum likelihood estimation. The “Parameter Information Index” and the “Error Information Index” are normalized entropy values that measure the proximity of the solution to the prior or target distributions.

The next table displayed is the ANOVA table, shown in Figure 13.4. This is in the same form as the ANOVA table for the MODEL procedure, since this is also a multivariate procedure.

Figure 13.4 Summary of Residual Errors

GME-M Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj RSq
test_score	6	14	175.8	8.7881	2.9645	0.7266	0.6290

The last table displayed is the “Parameter Estimates” table, shown in Figure 13.5. The difference between this parameter estimates table and the parameter estimates table produced by other regression procedures is that the standard error and the probabilities are labeled as approximate.

Figure 13.5 Parameter Estimates

GME-M Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
teach_sal	0.287979	0.00551	52.26	<.0001
prcnt_prof	0.02266	0.00323	7.01	<.0001
socio_stat	0.199777	0.0308	6.48	<.0001
teach_score	0.497137	0.0180	27.61	<.0001
mom_ed	1.644472	0.0921	17.85	<.0001
Intercept	10.5021	0.3958	26.53	<.0001

The parameter estimates produced by the REG procedure for this same model are shown in [Figure 13.6](#). Note that the parameters and standard errors from PROC REG are much different than estimates produced by PROC ENTROPY.

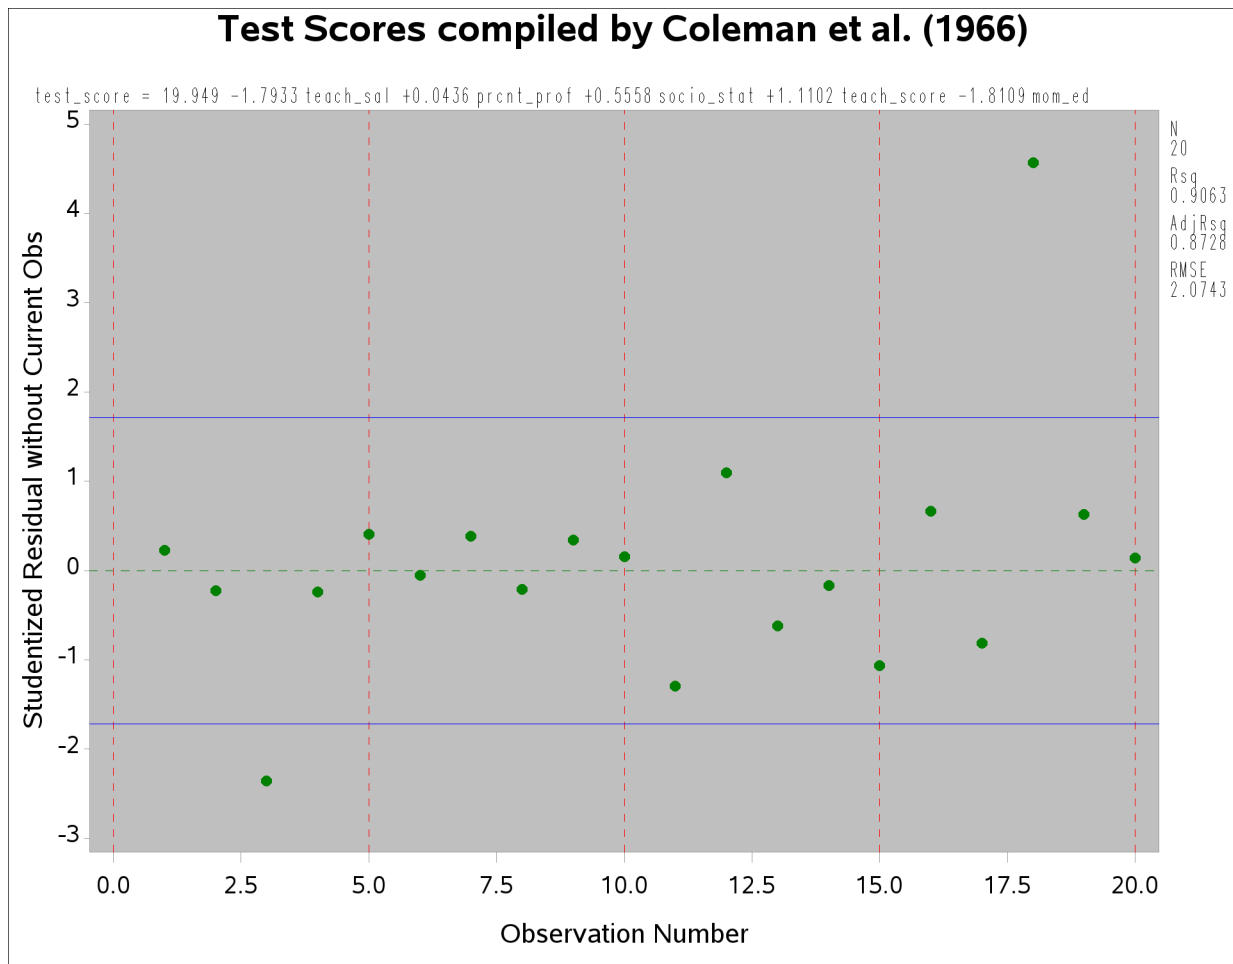
```
symbol v=dot h=1 c=green;

proc reg data=coleman;
  model test_score = teach_sal prcnt_prof socio_stat teach_score mom_ed;
  plot rstudent.*obs.
    / vref= -1.714 1.714 cvref=blue lvref=1
      HREF=0 to 30 by 5 chREF=red cframe=ligr;
run;
```

Figure 13.6 REG Procedure Parameter Estimates

Test Scores compiled by Coleman et al. (1966)					
The REG Procedure					
Model: MODEL1					
Dependent Variable: test_score					
Parameter Estimates					
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t
Intercept	1	19.94857	13.62755	1.46	0.1653
teach_sal	1	-1.79333	1.23340	-1.45	0.1680
prcnt_prof	1	0.04360	0.05326	0.82	0.4267
socio_stat	1	0.55576	0.09296	5.98	<.0001
teach_score	1	1.11017	0.43377	2.56	0.0227
mom_ed	1	-1.81092	2.02739	-0.89	0.3868

This data set contains two outliers, observations 3 and 18. These can be seen in a plot of the residuals shown in [Figure 13.7](#)

Figure 13.7 PROC REG Residuals with Outliers

The presence of outliers suggests that a robust estimator such as M -estimator in the ROBUSTREG procedure should be used. The following statements use the ROBUSTREG procedure to estimate the model.

```
proc robustreg data=coleman;
  model test_score = teach_sal prcnt_prof
                    socio_stat teach_score mom_ed;
run;
```

The results of the estimation are shown in Figure 13.8.

Figure 13.8 *M*-Estimation Results

Test Scores compiled by Coleman et al. (1966)							
The ROBUSTREG Procedure							
Parameter Estimates							
Parameter	DF	Estimate	Standard Error	95% Confidence Limits		Chi-Square	Pr > ChiSq
Intercept	1	29.3416	6.0381	17.5072	41.1761	23.61	<.0001
teach_sal	1	-1.6329	0.5465	-2.7040	-0.5618	8.93	0.0028
prcnt_prof	1	0.0823	0.0236	0.0361	0.1286	12.17	0.0005
socio_stat	1	0.6653	0.0412	0.5846	0.7461	260.95	<.0001
teach_score	1	1.1744	0.1922	0.7977	1.5510	37.34	<.0001
mom_ed	1	-3.9706	0.8983	-5.7312	-2.2100	19.54	<.0001
Scale	1	0.6966					

Note that TEACH_SAL(VAR1) and MOM_ED(VAR5) change greatly when the robust estimation is used. Unfortunately, these two coefficients are negative, which implies that the test scores increase with decreasing teacher salaries and decreasing levels of the mother's education. Since ROBUSTREG is robust to outliers, they are not causing the counterintuitive parameter estimates.

The condition number of the regressor matrix \mathbf{X} also plays an important role in parameter estimation. The condition number of the matrix can be obtained by specifying the COLLIN option in the PROC ENTROPY statement.

```
proc entropy data=coleman collin;
  model test_score = teach_sal prcnt_prof socio_stat teach_score mom_ed;
run;
```

The output produced by the COLLIN option is shown in [Figure 13.9](#).

Figure 13.9 Collinearity Diagnostics

Test Scores compiled by Coleman et al. (1966)						
The ENTROPY Procedure						
Collinearity Diagnostics						
Number	Eigenvalue	Condition Number	-----Proportion of Variation-----			
			teach_sal	prcnt_prof	socio_stat	teach_score
1	4.978128	1.0000	0.0007	0.0012	0.0026	0.0001
2	0.937758	2.3040	0.0006	0.0028	0.2131	0.0001
3	0.066023	8.6833	0.0202	0.3529	0.6159	0.0011
4	0.016036	17.6191	0.7961	0.0317	0.0534	0.0059
5	0.001364	60.4112	0.1619	0.3242	0.0053	0.7987
6	0.000691	84.8501	0.0205	0.2874	0.1096	0.1942
Collinearity Diagnostics						
Number	Eigenvalue	Condition Number	-Proportion of Variation-			
			mom_ed	Intercept		
1	4.978128	1.0000	0.0001	0.0000		
2	0.937758	2.3040	0.0000	0.0001		
3	0.066023	8.6833	0.0000	0.0003		
4	0.016036	17.6191	0.0083	0.0099		
5	0.001364	60.4112	0.3309	0.0282		
6	0.000691	84.8501	0.6607	0.9614		

The condition number of the \mathbf{X} matrix is reported to be 84.85. This means that the condition number of $\mathbf{X}'\mathbf{X}$ is $84.85^2 = 7199.5$, which is very large.

Ridge regression can be used to offset some of the problems associated with ill-conditioned \mathbf{X} matrices. Using the formula for the ridge value as

$$\lambda_R = \frac{kS^2}{\hat{\beta}'\hat{\beta}} \approx 0.9$$

where $\hat{\beta}$ and S^2 are the least squares estimators of β and σ^2 and $k = 6$. A ridge regression of the test score model was performed by using the data set with the outliers removed. The following PROC REG code performs the ridge regression:

```
data coleman;
  set coleman;
  if _n_ = 3 or _n_ = 18 then delete;
run;

proc reg data=coleman ridge=0.9 outest=t noprint;
  model test_score = teach_sal prcnt_prof socio_stat teach_score mom_ed;
run;

proc print data=t;
run;
```

The results of the estimation are shown in Figure 13.10.

Figure 13.10 Ridge Regression Estimates

Test Scores compiled by Coleman et al. (1966)							
Obs	_MODEL_	_TYPE_	_DEPVAR_	_RIDGE_	_PCOMIT_	_RMSE_	Intercept
1	MODEL1	PARMS	test_score	.	.	0.78236	29.7577
2	MODEL1	RIDGE	test_score	0.9	.	3.19679	9.6698
Obs	teach_ sal	prcnt_ prof	socio_ stat	teach_ score	mom_ed	test_ score	
1	-1.69854	0.085118	0.66617	1.18400	-4.06675	-1	
2	-0.08892	0.041889	0.23223	0.60041	1.32168	-1	

Note that the ridge regression estimates are much closer to the estimates produced by the ENTROPY procedure that uses the original data set. Ridge regressions are not robust to outliers as maximum entropy estimates are. This might explain why the estimates still differ for TEACH_SAL.

Using Prior Information

You can use prior information about the parameters or the residuals to improve the efficiency of the estimates. Some authors prefer the terms *pre-sample* or *pre-data* over the term *prior* when used with maximum entropy to avoid confusion with Bayesian methods. The maximum entropy method described here does not use Bayes' rule when including prior information in the estimation.

To perform regression, the ENTROPY procedure uses a generalization of maximum entropy called *generalized maximum entropy*. In maximum entropy estimation, the unknowns are probabilities. Generalized maximum entropy expands the set of problems that can be solved by introducing the concept of *support points*. Generalized maximum entropy still estimates probabilities, but these are the probabilities of a support point. Support points are used to map the (0, 1) domain of the maximum entropy to the any finite range of values.

Prior information, such as expected ranges for the parameters or the residuals, is added by specifying support points for the parameters or the residuals. Support points are points in one dimension that specify the expected domain of the parameter or the residual. The wider the domain specified, the less efficient your parameter estimates are (the more variance they have). Specifying more support points in the same width interval also improves the efficiency of the parameter estimates at the cost of more computation. Golan, Judge, and Miller (1996) show that the gains in efficiency fall off for adding more than five support points. You can specify between 2 to 256 support points in the ENTROPY procedure.

If you have only a small amount of data, the estimates are very sensitive to your selection of support points and weights. For larger data sets, incorrect priors are discounted if they are not supported by the data.

Consider the data set generated by the following SAS statements:

```
data prior;
```

```

do by = 1 to 100;
  do t = 1 to 10;
    y = 2*t + 5 * rannor(4);
    output;
  end;
end;
run;

```

The PRIOR data set contains 100 samples of 10 observations each from the population

$$y = 2 * t + \epsilon$$

$$\epsilon \sim N(0, 5)$$

You can estimate these samples using PROC ENTROPY as

```

proc entropy data=prior outest=parml noprint;
  model y = t ;
  by by;
run;

```

The 100 estimates are summarized by using the following SAS statements:

```

proc univariate data=parml;
  var t;
run;

```

The summary statistics from PROC UNIVARIATE are shown in [Output 13.11](#). The true value of the coefficient T is 2.0, demonstrating that maximum entropy estimates tend to be biased.

Figure 13.11 No Prior Information Monte Carlo Summary

Test Scores compiled by Coleman et al. (1966)			
The UNIVARIATE Procedure			
Variable: t			
Basic Statistical Measures			
Location		Variability	
Mean	1.693608	Std Deviation	0.30199
Median	1.707653	Variance	0.09120
Mode	.	Range	1.46194
		Interquartile Range	0.32329

Now assume that you have prior information about the slope and the intercept for this model. You are reasonably confident that the slope is 2 and you are less confident that intercept is zero. To specify prior information about the parameters, use the PRIORS statement.

There are two parts to the prior information specified in the PRIORS statement. The first part is the support points for a parameter. The support points specify the domain of the parameter. For example, the following

statement sets the support points -1000 and 1000 for the parameter associated with variable T :

```
priors t -1000 1000;
```

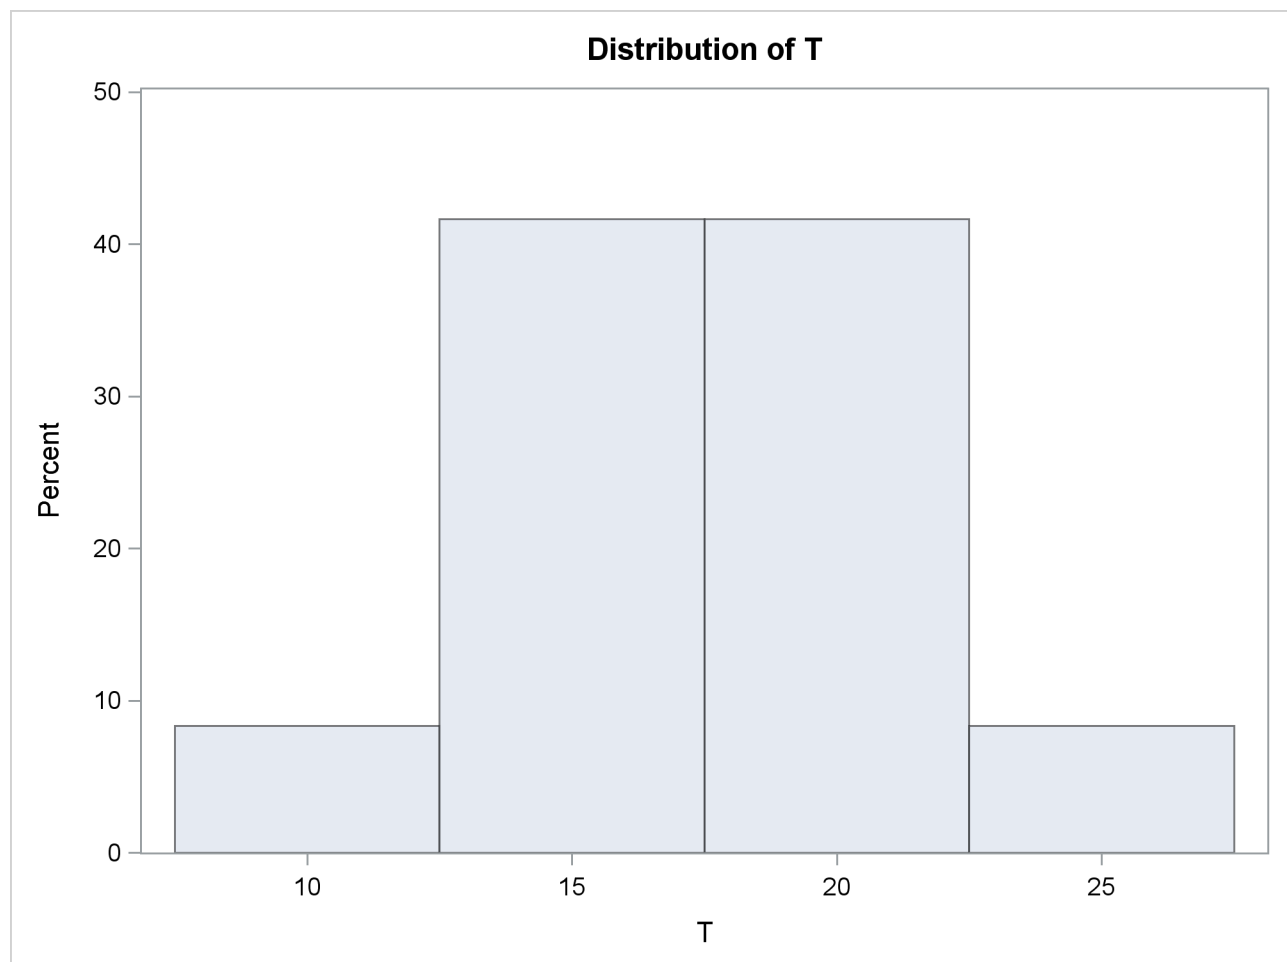
This means that the coefficient lies in the interval $[-1000, 1000]$. If the estimated value of the coefficient is actually outside of this interval, the estimation will not converge. In the previous `PRIORS` statement, no weights were specified for the support points, so uniform weights are assumed. This implies that the coefficient has a uniform probability of being in the interval $[-1000, 1000]$.

The second part of the prior information is the weights on the support points. For example, the following statements sets the support points 10, 15, 20, and 25 with weights 1, 5, 5, and 1 respectively for the coefficient of T :

```
priors t 10(1) 15(5) 20(5) 25(1);
```

This creates the prior distribution on the coefficient shown in [Figure 13.12](#). The weights are automatically normalized so that they sum to one.

Figure 13.12 Prior Distribution of Parameter T



For the PRIOR data set created previously, the expected value of the coefficient of T is 2. The following SAS statements reestimate the parameters with a prior weight specified for each one.

```
proc entropy data=prior outest=parm2 noprint;
  priors t 0(1) 2(3) 4(1)
        intercept -100(.5) -10(1.5) 0(2) 10(1.5) 100(0.5);
  model y = t;
  by by;
run;
```

The priors on the coefficient of T express a confident view of the value of the coefficient. The priors on INTERCEPT express a more diffuse view on the value of the intercept. The following PROC UNIVARIATE statement computes summary statistics from the estimations:

```
proc univariate data=parm2;
  var t;
run;
```

The summary statistics for the distribution of the estimates of T are shown in Figure 13.13.

Figure 13.13 Prior Information Monte Carlo Summary

Prior Distribution of Parameter T			
The UNIVARIATE Procedure			
Variable: t			
Basic Statistical Measures			
Location		Variability	
Mean	1.999953	Std Deviation	0.01436
Median	2.001423	Variance	0.0002061
Mode	.	Range	0.08525
		Interquartile Range	0.01855

The prior information improves the estimation of the coefficient of T dramatically. The downside of specifying priors comes when they are incorrect. For example, say the priors for this model were specified as

```
priors t -2(1) 0(3) 2(1);
```

to indicate a prior centered on zero instead of two.

The resulting summary statistics shown in Figure 13.14 indicate how the estimation is biased away from the solution.

Figure 13.14 Incorrect Prior Information Monte Carlo Summary

Prior Distribution of Parameter T			
The UNIVARIATE Procedure			
Variable: t			
Basic Statistical Measures			
Location		Variability	
Mean	0.062550	Std Deviation	0.00920
Median	0.062527	Variance	0.0000847
Mode	.	Range	0.05442
		Interquartile Range	0.01112

The more data available for estimation, the less sensitive the parameters are to the priors. If the number of observations in each sample is 50 instead of 10, then the summary statistics shown in Figure 13.15 are produced. The prior information is not supported by the data, so it is discounted.

Figure 13.15 Incorrect Prior Information with More Data

Prior Distribution of Parameter T			
The UNIVARIATE Procedure			
Variable: t			
Basic Statistical Measures			
Location		Variability	
Mean	0.652921	Std Deviation	0.00933
Median	0.653486	Variance	0.0000870
Mode	.	Range	0.04351
		Interquartile Range	0.01498

Pure Inverse Problems

A special case of systems of equations estimation is the pure inverse problem. A pure problem is one that contains an exact relationship between the dependent variable and the independent variables and does not have an error component. A pure inverse problem can be written as

$$\mathbf{y} = \mathbf{X}\boldsymbol{\beta}$$

where \mathbf{y} is a n -dimensional vector of observations, \mathbf{X} is a $n \times k$ matrix of regressors, and $\boldsymbol{\beta}$ is a k -dimensional vector of unknowns. Notice that there is no error term.

A classic example is a dice problem (Jaynes 1963). Given a six-sided die that can take on the values $x = 1, 2, 3, 4, 5, 6$ and the average outcome of the die $y = A$, compute the probabilities $\boldsymbol{\beta} = (p_1, p_2, \dots, p_6)'$

of rolling each number. This infers six values from two pieces of information. The data points are the expected value of y , and the sum of the probabilities is one. Given $E(y) = 4.0$, this problem is solved by using the following SAS code:

```
data one;
  array x[6] ( 1 2 3 4 5 6 );
  y=4.0;
run;

proc entropy data=one pure;
  priors x1 0 1 x2 0 1 x3 0 1 x4 0 1 x5 0 1 x6 0 1;
  model y = x1-x6/ noint;
  restrict x1 + x2 +x3 +x4 + x5 + x6 =1;
run;
```

The probabilities are given in Figure 13.16.

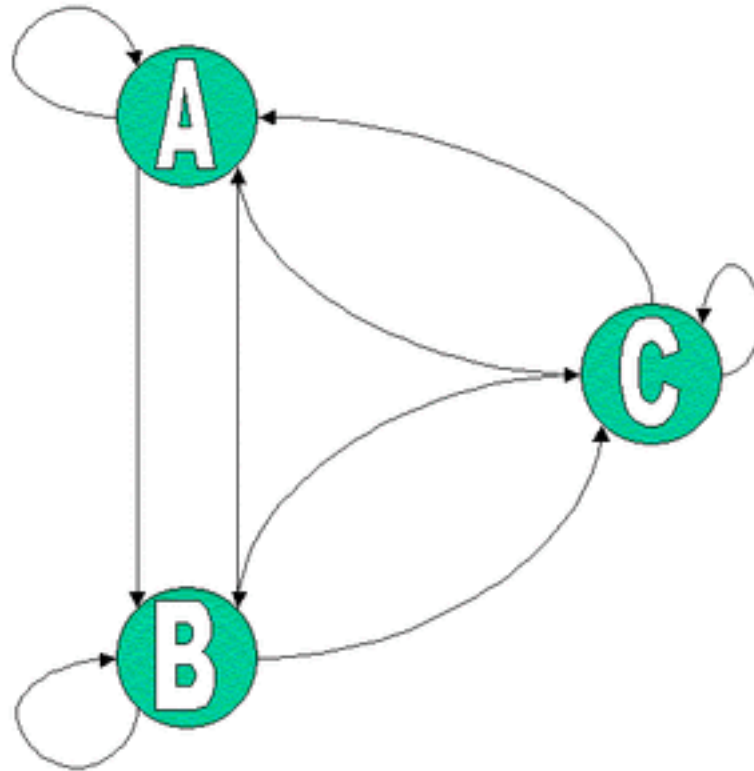
Figure 13.16 Jaynes' Dice Pure Inverse Problem

Prior Distribution of Parameter T			
The ENTROPY Procedure			
GME Variable Estimates			
Variable	Estimate	Information Index	Label
x1	0.101763	0.5254	
x2	0.122658	0.4630	
x3	0.147141	0.3974	
x4	0.175533	0.3298	
x5	0.208066	0.2622	
x6	0.244839	0.1970	
Restrict0	2.388082	.	x1 + x2 + x3 + x4 + x5 + x6 = 1

Note how the probabilities are skewed to the higher values because of the high average roll provided in the input data.

First-Order Markov Process Estimation

A more useful inverse problem is the first-order markov process. Companies have a share of the marketplace where they do business. Generally, customers for a specific market space can move from company to company. The movement of customers can be visualized graphically as a flow diagram, as in Figure 13.17. The arrows represent movements of customers from one company to another.

Figure 13.17 Markov Transition Diagram

You can model the probability that a customer moves from one company to another using a first-order Markov model. Mathematically the model is:

$$y_t = P y_{t-1}$$

where y_t is a vector of k market shares at time t and P is a $k \times k$ matrix of unknown transition probabilities. The value p_{ij} represents the probability that a customer who is currently using company j at time $t - 1$ moves to company i at time t . The diagonal elements then represent the probability that a customer stays with the current company. The columns in P sum to one.

Given market share information over time, you can estimate the transition probabilities P . In order to estimate P using traditional methods, you need at least k observations. If you have fewer than k transitions, you can use the ENTROPY procedure to estimate the probabilities.

Suppose you are studying the market share for four companies. If you want to estimate the transition probabilities for these four companies, you need a time series with four observations of the shares. Assume the current transition probability matrix is as follows:

$$\begin{bmatrix} 0.7 & 0.4 & 0.0 & 0.1 \\ 0.1 & 0.5 & 0.4 & 0.0 \\ 0.0 & 0.1 & 0.6 & 0.0 \\ 0.2 & 0.0 & 0.0 & 0.9 \end{bmatrix}$$

The following SAS DATA step statements generate a series of market shares from this probability matrix. A transition is represented as the current period shares, y , and the previous period shares, x .

```

data m;
    /* Known Transition matrix */
    array p[4,4] (0.7 .4 .0 .1
                  0.1 .5 .4 .0
                  0.0 .1 .6 .0
                  0.2 .0 .0 .9 ) ;
    /* Initial Market shares */
    array y[4] y1-y4 ( .4 .3 .2 .1 );
    array x[4] x1-x4;
    drop p1-p16 i;
    do i = 1 to 3;
        x[1] = y[1]; x[2] = y[2];
        x[3] = y[3]; x[4] = y[4];
        y[1] = p[1,1] * x1 + p[1,2] * x2 + p[1,3] * x3 + p[1,4] * x4;
        y[2] = p[2,1] * x1 + p[2,2] * x2 + p[2,3] * x3 + p[2,4] * x4;
        y[3] = p[3,1] * x1 + p[3,2] * x2 + p[3,3] * x3 + p[3,4] * x4;
        y[4] = p[4,1] * x1 + p[4,2] * x2 + p[4,3] * x3 + p[4,4] * x4;
        output;
    end;
run;

```

The following SAS statements estimate the transition matrix by using only the first transition.

```

proc entropy markov pure data=m(obs=1);
    model y1-y4 = x1-x4;
run;

```

The MARKOV option implies NOINT for each model, that the sum of the parameters in each column is one, and chooses support points of 0 and 1. This model can be expressed equivalently as

```

proc entropy pure data=m(obs=1) ;
    priors y1.x1 0 1 y1.x2 0 1 y1.x3 0 1 y1.x4 0 1;
    priors y2.x1 0 1 y2.x2 0 1 y2.x3 0 1 y2.x4 0 1;
    priors y3.x1 0 1 y3.x2 0 1 y3.x3 0 1 y3.x4 0 1;
    priors y4.x1 0 1 y4.x2 0 1 y4.x3 0 1 y4.x4 0 1;

    model y1 = x1-x4 / noint;
    model y2 = x1-x4 / noint;
    model y3 = x1-x4 / noint;
    model y4 = x1-x4 / noint;

    restrict y1.x1 + y2.x1 + y3.x1 + y4.x1 = 1;
    restrict y1.x2 + y2.x2 + y3.x2 + y4.x2 = 1;
    restrict y1.x3 + y2.x3 + y3.x3 + y4.x3 = 1;
    restrict y1.x4 + y2.x4 + y3.x4 + y4.x4 = 1;
run;

```

The transition matrix is given in [Figure 13.18](#).

Figure 13.18 Estimate of P by Using One Transition

Prior Distribution of Parameter T		
The ENTROPY Procedure		
GME Variable Estimates		
Variable	Estimate	Information Index
y1.x1	0.463407	0.0039
y1.x2	0.41055	0.0232
y1.x3	0.356272	0.0605
y1.x4	0.302163	0.1161
y2.x1	0.272755	0.1546
y2.x2	0.271459	0.1564
y2.x3	0.267252	0.1625
y2.x4	0.260084	0.1731
y3.x1	0.119926	0.4709
y3.x2	0.148481	0.3940
y3.x3	0.180224	0.3194
y3.x4	0.214394	0.2502
y4.x1	0.143903	0.4056
y4.x2	0.169504	0.3434
y4.x3	0.196252	0.2856
y4.x4	0.223364	0.2337

Note that P varies greatly from the true solution.

If two transitions are used instead (OBS=2), the resulting transition matrix is shown in [Figure 13.19](#).

```
proc entropy markov pure data=m(obs=2);
  model y1-y4 = x1-x4;
run;
```

Figure 13.19 Estimate of P by Using Two Transitions

Prior Distribution of Parameter T		
The ENTROPY Procedure		
GME Variable Estimates		
Variable	Estimate	Information Index
y1.x1	0.721012	0.1459
y1.x2	0.355703	0.0609
y1.x3	0.026095	0.8256
y1.x4	0.096654	0.5417
y2.x1	0.083987	0.5839
y2.x2	0.53886	0.0044
y2.x3	0.373668	0.0466
y2.x4	0.000133	0.9981
y3.x1	0.000062	0.9990
y3.x2	0.099848	0.5315
y3.x3	0.600104	0.0291
y3.x4	7.871E-8	1.0000
y4.x1	0.194938	0.2883
y4.x2	0.00559	0.9501
y4.x3	0.000133	0.9981
y4.x4	0.903214	0.5413

This transition matrix is much closer to the actual transition matrix.

If, in addition to the transitions, you had other information about the transition matrix, such as your own company's transition values, that information can be added as restrictions to the parameter estimates. For noisy data, the PURE option should be dropped. Note that this example has six zero probabilities in the transition matrix; the accurate estimation of transition matrices with fewer zero probabilities generally requires more transition observations.

Analyzing Multinomial Response Data

Multinomial discrete choice models suffer the same problems with collinearity of the regressors and small sample sizes as linear models. Unordered multinomial discrete choice models can be estimated using a variant of GME for discrete models called GME-D.

Consider the model shown in Golan, Judge, and Perloff (1996). In this model, there are five occupational categories, and the categories are considered a function of four individual characteristics. The sample contains 337 individuals.

```
data kpdata;
  input job x1 x2 x3 x4;
datalines;
```

... more lines ...

The dependent variable in this data, job, takes on values 0 through 4. Support points are used only for the error terms; so error supports are specified on the MODEL statement.

```
proc entropy data=kpdata gmed tech=nra;
  model job = x1 x2 x3 x4 / noint
    esupports=( -.1 -0.0666 -0.0333 0 0.0333 0.0666 .1 );
run;
```

Figure 13.20 Estimate of Jobs Model by Using GME-D

Prior Distribution of Parameter T				
The ENTROPY Procedure				
GME-D Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
x1_1	1.802572	1.3610	1.32	0.1863
x2_1	-0.00251	0.0154	-0.16	0.8705
x3_1	-0.17282	0.0885	-1.95	0.0517
x4_1	1.054659	0.6986	1.51	0.1321
x1_2	0.089156	1.2764	0.07	0.9444
x2_2	0.019947	0.0146	1.37	0.1718
x3_2	0.010716	0.0830	0.13	0.8974
x4_2	0.288629	0.5775	0.50	0.6176
x1_3	-4.62047	1.6476	-2.80	0.0053
x2_3	0.026175	0.0166	1.58	0.1157
x3_3	0.245198	0.0986	2.49	0.0134
x4_3	1.285466	0.8367	1.54	0.1254
x1_4	-9.72734	1.5813	-6.15	<.0001
x2_4	0.027382	0.0156	1.75	0.0805
x3_4	0.660836	0.0947	6.98	<.0001
x4_4	1.47479	0.6970	2.12	0.0351

Note there are five estimates of the parameters produced for each regressor, one for each choice. The first choice is restricted to zero for normalization purposes. PROC ENTROPY drops the zeroed regressors. PROC ENTROPY also generates tables of marginal effects for each regressor. The following statements generate the marginal effects table for the previous analysis at the means of the variables.

```
proc entropy data=kpdata gmed tech=nra;
  model job = x1 x2 x3 x4 / noint
    esupports=( -.1 -0.0666 -0.0333 0 0.0333 0.0666 .1 )
    marginals;
run;
```

Figure 13.21 Estimate of Jobs Model by Using GME-D (Marginals)

Prior Distribution of Parameter T		
The ENTROPY Procedure		
GME-D Variable Marginal Effects Table		
Variable	Marginal Effect	Mean
x1_0	0.338758	1
x2_0	-0.0019	20.50148
x3_0	-0.02129	13.09496
x4_0	-0.09917	0.916914
x1_1	0.859883	1
x2_1	-0.00345	20.50148
x3_1	-0.0648	13.09496
x4_1	0.034396	0.916914
x1_2	0.86101	1
x2_2	0.000963	20.50148
x3_2	-0.04948	13.09496
x4_2	-0.16297	0.916914
x1_3	-0.25969	1
x2_3	0.0015	20.50148
x3_3	0.009289	13.09496
x4_3	0.065569	0.916914
x1_4	-1.79996	1
x2_4	0.00288	20.50148
x3_4	0.126283	13.09496
x4_4	0.162172	0.916914

The marginals are derivatives of the probabilities with respect to each variable and so summarize how a small change in each variable affects the overall probability.

PROC ENTROPY also enables the user to specify where the derivative is evaluated, as shown below:

```
proc entropy data=kpdata gmed tech=nra;
  model job = x1 x2 x3 x4 / noint
    esupports=( -.1 -0.0666 -0.0333 0 0.0333 0.0666 .1 )
    marginals=( x2=.4 x3=10 x4=0 );
run;
```


Figure 13.22 Estimate of Jobs Model by Using GME-D (Marginals)

Prior Distribution of Parameter T				
The ENTROPY Procedure				
GME-D Variable Marginal Effects Table				
Variable	Marginal Effect	Mean	Marginal Effect at User Supplied Values	User Supplied Values
x1_0	0.338758	1	-0.0901	1
x2_0	-0.0019	20.50148	-0.00217	0.4
x3_0	-0.02129	13.09496	0.009586	10
x4_0	-0.09917	0.916914	-0.14204	0
x1_1	0.859883	1	0.463181	1
x2_1	-0.00345	20.50148	-0.00311	0.4
x3_1	-0.0648	13.09496	-0.04339	10
x4_1	0.034396	0.916914	0.174876	0
x1_2	0.86101	1	-0.07894	1
x2_2	0.000963	20.50148	0.004405	0.4
x3_2	-0.04948	13.09496	0.015555	10
x4_2	-0.16297	0.916914	-0.072	0
x1_3	-0.25969	1	-0.16459	1
x2_3	0.0015	20.50148	0.000623	0.4
x3_3	0.009289	13.09496	0.00929	10
x4_3	0.065569	0.916914	0.02648	0
x1_4	-1.79996	1	-0.12955	1
x2_4	0.00288	20.50148	0.000256	0.4
x3_4	0.126283	13.09496	0.008956	10
x4_4	0.162172	0.916914	0.012684	0

In this example, you evaluate the derivative when $x_1=1$, $x_2=0.4$, $x_3=10$, and $x_4=0$. If the user neglects a variable, PROC ENTROPY uses its mean value.

Syntax: ENTROPY Procedure

The following statements can be used with the ENTROPY procedure:

```

PROC ENTROPY options ;
  BOUNDS bound1 < , bound2, ... > ;
  BY variable < variable ... > ;
  ID variable < variable ... > ;
  MODEL variable = variable < variable > ... < / options > ;
  PRIORS variable < support points > variable < value > ... ;
  RESTRICT restriction1 < , restriction2 ... > ;
  TEST < "name" > test1 < , test2 ... > < / options > ;
  WEIGHT variable ;

```

Functional Summary

The statements and options in the ENTROPY procedure are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify the input data set for the variables	ENTROPY	DATA=
specify the input data set for support points and priors	ENTROPY	PDATA=
specify the output data set for residual, predicted, and actual values	ENTROPY	OUT=
specify the output data set for the support points and priors	ENTROPY	OUTP=
write the covariance matrix of the estimates to OUTEST= data set	ENTROPY	OUTCOV
write the parameter estimates to a data set	ENTROPY	OUTEST=
write the Lagrange multiplier estimates to a data set	ENTROPY	OUTL=
write the covariance matrix of the equation errors to a data set	ENTROPY	OUTS=
write the S matrix used in the objective function definition to a data set	ENTROPY	OUTSUSED=
read the covariance matrix of the equation errors	ENTROPY	SDATA=
Printing Options		
request that the procedure produce graphics via the Output Delivery System	ENTROPY	PLOTS=

Description	Statement	Option
print collinearity diagnostics	ENTROPY	COLLIN
suppress the normal printed output	ENTROPY	NOPRINT
Options to Control Iteration Output		
print a summary iteration listing	ENTROPY	ITPRINT
Options to Control the Minimization Process		
specify the convergence criteria	ENTROPY	CONVERGE=
specify the maximum number of iterations allowed	ENTROPY	MAXITER=
specify the maximum number of subiterations allowed	ENTROPY	MAXSUBITER=
select the iterative minimization method to use	ENTROPY	METHOD=
Statements That Declare Variables		
specify BY-group processing	BY	
specify a weight variable	WEIGHT	
specify identifying variables	ID	
General PROC ENTROPY Statement Options		
specify seemingly unrelated regression	ENTROPY	SUR
specify iterated seemingly unrelated regression	ENTROPY	ITSUR
specify data-constrained generalized maximum entropy	ENTROPY	GME
specify moment generalized maximum entropy	ENTROPY	GMEM
specify the denominator for computing variances and covariances	ENTROPY	VARDEF=
General TEST Statement Options		
specify that a Wald test be computed	TEST	WALD
specify that a Lagrange multiplier test be computed	TEST	LM
specify that a likelihood ratio test be computed	TEST	LR
request all three types of tests	TEST	ALL

PROC ENTROPY Statement

PROC ENTROPY *options* ;

The following options can be specified in the PROC ENTROPY statement.

General Options

COLLIN

requests that the collinearity diagnostics of the $X'X$ matrix be printed.

COVBEST=CROSS | GME | GMEM

specifies the method for producing the covariance matrix of parameters for output and for standard error calculations. GMEM and GME are aliases and are the default.

GME | GCE

requests generalized maximum entropy or generalized cross entropy. This is the default estimation method.

GMEM | GCEM

requests moment maximum entropy or the moment cross entropy.

GMED

requests a variant of GME suitable for multinomial discrete choice models.

MARKOV

specifies that the model is a first-order Markov model.

PURE

specifies a regression without an error term.

SUR | ITSUR

specifies seemingly unrelated regression or iterated seemingly unrelated regression.

VARDEF=N | WGT | DF | WDF

specifies the denominator to be used in computing variances and covariances. VARDEF=N specifies that the number of nonmissing observations be used. VARDEF=WGT specifies that the sum of the weights be used. VARDEF=DF specifies that the number of nonmissing observations minus the model degrees of freedom (number of parameters) be used. VARDEF=WDF specifies that the sum of the weights minus the model degrees of freedom be used. The default is VARDEF=DF.

Data Set Options

DATA=SAS-data-set

specifies the input data set. Values for the variables in the model are read from this data set.

PDATA=SAS-data-set

names the SAS data set that contains the data about priors and supports.

OUT=SAS-data-set

names the SAS data set to contain the residuals from each estimation.

OUTCOV**COVOUT**

writes the covariance matrix of the estimates to the OUTEST= data set in addition to the parameter estimates. The OUTCOV option is applicable only if the OUTEST= option is also specified.

OUTEST=SAS-data-set

names the SAS data set to contain the parameter estimates and optionally the covariance of the estimates.

OUTL=SAS-data-set

names the SAS data set to contain the estimated Lagrange multipliers for the models.

OUTP=SAS-data-set

names the SAS data set to contain the support points and estimated probabilities.

OUTS=SAS-data-set

names the SAS data set to contain the estimated covariance matrix of the equation errors. This is the covariance of the residuals computed from the parameter estimates.

OUTSUDED=SAS-data-set

names the SAS data set to contain the **S** matrix used in the objective function definition. The OUTSUDED= data set is the same as the OUTS= data set for the methods that iterate the **S** matrix.

SDATA=SAS-data-set

specifies a data set that provides the covariance matrix of the equation errors. The matrix read from the SDATA= data set is used for the equation error covariance matrix (**S** matrix) in the estimation. The SDATA= matrix is used to provide only the initial estimate of **S** for the methods that iterate the **S** matrix.

Printing Options

ITPRINT

prints the parameter estimates, objective function value, and convergence criteria at each iteration.

NOPRINT

suppresses the normal printed output but does not suppress error listings. Using any other print option turns the NOPRINT option off.

PLOTS=global-plot-options | plot-request

controls the plots that the ENTROPY procedure produces. (For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).) The *global-plot-options* apply to all relevant plots generated by the ENTROPY procedure.

The *global-plot-options* supported by the ENTROPY procedure are as follows:

ONLY suppresses the default plots. Only the plots specifically requested are produced.

UNPACKPANEL breaks a graphic that is otherwise paneled into individual component plots.

The specific *plot-request* values supported by the ENTROPY procedure are as follows:

ALL requests that all plots appropriate for the particular analysis be produced. ALL is equivalent to specifying FITPLOT, COOKSD, QQ, RESIDUALHISTOGRAM, and STUDENTRESIDUAL.

FITPLOT plots the predicted and actual values.

COOKSD produces the Cook's *D* plot.

QQ produces a Q-Q plot of residuals.

RESIDUALHISTOGRAM plots the histogram of residuals.

STUDENTRESIDUAL plots the studentized residuals.

NONE suppresses all plots.

The default behavior is to plot all plots appropriate for the particular analysis (ALL) in a panel.

Options to Control the Minimization Process

The following options can be helpful if a convergence problem occurs for a given model and set of data. The ENTROPY procedure uses the nonlinear optimization subsystem (NLO) to perform the model optimizations. In addition to the options listed below, all options supported in the NLO subsystem can be specified on the ENTROPY procedure statement. See Chapter 6, “Nonlinear Optimization Methods,” for more details.

CONVERGE=value

GCONV=value

specifies the convergence criteria for *S*-iterated methods. The convergence measure computed during model estimation must be less than *value* before convergence is assumed. The default value is CONVERGE=0.001.

DUAL | PRIMAL

specifies whether the optimization problem is solved using the dual or primal form. The dual form is the default.

MAXITER=*n*

specifies the maximum number of iterations allowed. The default is MAXITER=100.

MAXSUBITER=*n*

specifies the maximum number of subiterations allowed for an iteration. The MAXSUBITER= option limits the number of step halvings. The default is MAXSUBITER=30.

METHOD=TR | NEWRAP | NRR | QN | CONGR | NSIMP | DBLDOG | LEVMAR

TECHNIQUE=TR | NEWRAP | NRR | QN | CONGR | NSIMP | DBLDOG | LEVMAR

TECH=TR | NEWRAP | NRR | QN | CONGR | NSIMP | DBLDOG | LEVMAR

specifies the iterative minimization method to use. METHOD=TR specifies the trust region method, METHOD=NEWRAP specifies the Newton-Raphson method, METHOD=NRR specifies the Newton-Raphson ridge method, and METHOD=QN specifies the quasi-Newton method. See Chapter 6, “[Nonlinear Optimization Methods](#),” for more details about optimization methods. The default is METHOD=QN for the dual form and METHOD=NEWRAP for the primal form.

BOUNDS Statement

BOUNDS *bound1* <, *bound2* ... > ;

The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the ENTROPY procedure. You can specify any number of BOUNDS statements.

Each *boundary constraint* is composed of variables, constants, and inequality operators in the following form:

item operator item <, **operator item** <, **operator item** ... > >

Each *item* is a constant, the name of a regressor variable, or a list of regressor names. Each *operator* is <, >, <=, or >=.

You can use either the BOUNDS statement or the RESTRICT statement to impose boundary constraints; the BOUNDS statement provides a simpler syntax for specifying inequality constraints. See section “[RESTRICT Statement](#)” on page 721 for more information about the computational details of estimation with inequality restrictions.

Lagrange multipliers are reported for all the active boundary constraints. In the printed output and in the OUTEST= data set, the Lagrange multiplier estimates are identified with the names BOUND1, BOUND2, and so forth. The probability of the Lagrange multipliers are computed using a beta distribution (LaMotte 1994). Nonactive or nonbinding bounds have no effect on the estimation results and are not noted in the output. To give the constraints more descriptive names, use the RESTRICT statement instead of the BOUNDS statement.

The following BOUNDS statement constrains the estimates of the coefficients of WAGE and TARGET and the 10 coefficients of *x1* through *x10* to be between zero and one. This example illustrates the use of parameter lists to specify boundary constraints.

```
bounds 0 < wage target x1-x10 < 1;
```

The following is an example of the use of the BOUNDS statement to impose boundary constraints on the variables X1, X2, and X3:

```
proc entropy data=zero;
  bounds .1 <= x1 <= 100,
         0 <= x2 <= 25.6,
         0 <= x3 <= 5;
```

```

model y = x1 x2 x3;
run;

```

The parameter estimates from this run are shown in Figure 13.23.

Figure 13.23 Output from Bounded Estimation

Prior Distribution of Parameter T							
The ENTROPY Procedure							
Variables(Supports(Weights)) x1 x2 x3 Intercept							
Equations(Supports(Weights)) y							
Prior Distribution of Parameter T							
The ENTROPY Procedure							
GME-M Estimation Summary							
Data Set Options							
DATA= WORK.ZERO							
Minimization Summary							
Parameters Estimated 4							
Covariance Estimator GME-M							
Entropy Type Shannon							
Entropy Form Dual							
Numerical Optimizer Newton-Raphson							
Final Information Measures							
Objective Function Value 6.292861							
Signal Entropy 6.375715							
Noise Entropy -0.08285							
Normed Entropy (Signal) 0.990364							
Normed Entropy (Noise) 1.004172							
Parameter Information Index 0.009636							
Error Information Index -0.00417							
Observations Processed							
Read 20							
Used 20							
NOTE: At GME-M Iteration 20 convergence criteria met.							
GME-M Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj RSq
y	4	16	1665620	83281.0	288.6	-0.0013	-0.1891

Figure 13.23 *continued*

GME-M Variable Estimates					
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t	Label
x1	0.1	0	.	.	
x2	0	0	.	.	
x3	3.33E-16	0	.	.	
Intercept	-0.00432	3.406E-6	-1269.3	<.0001	
	1.25731	9130.3	0.00	0.9999	0.1 <= x1
	0.009384	0	.	.	0 <= x2
	0.000025	0	.	.	0 <= x3

BY Statement

BY *variables* ;

A BY statement is used to obtain separate estimates for observations in groups defined by the BY variables. To save parameter estimates for each BY group, use the OUTEST= option.

ID Statement

ID *variables* ;

The ID statement specifies variables to identify observations in error messages or other listings and in the OUT= data set. The ID variables are normally SAS date or datetime variables. If more than one ID variable is used, the first variable is used to identify the observations and the remaining variables are added to the OUT= data set.

MODEL Statement

MODEL *dependent = regressors < / options > ;*

The MODEL statement specifies the dependent variable and independent regressor variables for the regression model. If no independent variables are specified in the MODEL statement, only the mean (intercept) is estimated. To model a system of equations, specify more than one MODEL statement.

The following options can be used in the MODEL statement after a slash (/).

ESUPPORTS=(*support (prior) . . .*)

specifies the support points and prior weights on the residuals for the specified equation. The default is the following five support values:

$$-10 * value, -value, 0, value, 10 * value$$

where *value* is computed as

$$value = (max(y) - \bar{y}) * multiplier$$

for GME, where *y* is the dependent variable, and

$$value = (max(y) - \bar{y}) * multiplier * nobs * max(X) * 0.1$$

for generalized maximum entropy—moments (GME-M), where **X** is the information matrix, and *nobs* is the number of observations. The *multiplier* depends on the MULTIPLIER= option. The MULTIPLIER= option defaults to 2 for unrestricted models and to 4 for restricted models. The prior probabilities default to the following:

$$0.0005, 0.333, 0.333, 0.333, 0.0005$$

The support points and prior weights are selected so that hypothesis tests can be performed without adding significant bias to the estimation. These prior probability values are ad hoc.

NOINT

suppresses the intercept parameter.

MARGINALS = (*variable = value, . . . , variable = value*)

requests that the marginal effects of each variable be calculated for GME-D. Specifying the MARGINALS option with an optional list of values calculates the marginals at that vector of values. For example, if *x1–x4* are explanatory variables, then including

$$\text{MARGINALS} = (x1 = 2, x2 = 4, x3 = -1, x4 = 5)$$

calculates the marginal effects at that vector. A skipped variable implies that its mean value is to be used.

CENSORED ((*UB | LB*) = (*variable | value*) , **ESUPPORTS** =(*support (prior) . . .*))

specifies that the dependent variable be observed with censoring and specifies the censoring thresholds and the supports of the censored observations.

CATEGORY= *variable*

specifies the variable that keeps track of the categories the dependent variable is in when there is range censoring. When the actual value is observed, this variable should be set to MISSING.

RANGE (ID = (QS | INT) L = (NUMBER) R = (NUMBER) , ESUPPORTS=(support < (prior) > ...))

specifies that the dependent variable be range bound. The RANGE option defines the range and the key (RANGE) that is used to identify the observation as being range bound. The RANGE = value should be some value in the CATEGORY= variable. The L and R define, respectively, the left endpoint of the range and the right endpoint of the range. ESUPPORTS sets the error supports on the variable.

PRIORS Statement

PRIORS *variable* < support points < (priors) > > *variable* < support points < (priors) > > ... ;

The PRIORS statement specifies the support points and prior weights for the coefficients on the variables.

Support points for coefficients default to five points, determined as follows:

$$-2 * value, -value, 0, value, 2 * value$$

where *value* is computed as

$$value = (\|mean\| + 3 * stderr) * multiplier$$

where the *mean* and the *stderr* are obtained from OLS and the *multiplier* depends on the MULTIPLIER= option. The MULTIPLIER= option defaults to 2 for unrestricted models and to 4 for restricted models. The prior probabilities for each support point default to the uniform distribution.

The number of support points must be at least two. If priors are specified, they must be positive and there must be the same number of priors as there are support points. Priors and support points can also be specified through the PDATA= data set.

RESTRICT Statement

RESTRICT *restriction1* < , *restriction2* ... > ;

The RESTRICT statement is used to impose linear restrictions on the parameter estimates. You can specify any number of RESTRICT statements.

Each *restriction* is written as an optional name, followed by an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

<"name" > **expression operator expression**

The optional “*name*” is a string used to identify the restriction in the printed output and in the OUTEST= data set. The *operator* can be =, <, >, <=, or >=. The operator and second expression are optional, as in the TEST statement, where they default to = 0.

Restriction expressions can be composed of variable names, multiplication (*), and addition (+) operators, and constants. Variable names in restriction expressions must be among the variables whose coefficients are estimated by the model. The restriction expressions must be a linear function of the variables.

The following is an example of the use of the RESTRICT statement:

```
proc entropy data=one;
  restrict y1.x1*x2 <= x2 + y2.x1;
  model y1 = x1 x2;
  model y2 = x1 x3;
run;
```

This example illustrates the use of compound names, y1.x1, to specify coefficients of specific equations.

TEST Statement

TEST < “*name*” > *test1* < , *test2* ... > < ,/ *options* > ;

The TEST statement performs tests of linear hypotheses on the model parameters.

The TEST statement applies only to parameters estimated in the model. You can specify any number of TEST statements.

Each *test* is written as an expression optionally followed by an equal sign (=) and a second expression:

expression <= **expression**>

Test expressions can be composed of variable names, multiplication (*), addition (+), and subtraction (−) operators, and constants. Variables named in test expressions must be among the variables estimated by the model.

If you specify only one expression in a TEST statement, that expression is tested against zero. For example, the following two TEST statements are equivalent:

```
test a + b;

test a + b = 0;
```

When you specify multiple tests on the same TEST statement, a joint test is performed. For example, the following TEST statement tests the joint hypothesis that both of the coefficients on a and b are equal to zero:

```
test a, b;
```

To perform separate tests rather than a joint test, use separate TEST statements. For example, the following TEST statements test the two separate hypotheses that a is equal to zero and that b is equal to zero:

```
test a;
test b;
```

You can use the following options in the TEST statement:

WALD

specifies that a Wald test be computed. WALD is the default.

LM

RAO

LAGRANGE

specifies that a Lagrange multiplier test be computed.

LR

LIKE

specifies that a pseudo-likelihood ratio test be computed.

ALL

requests all three types of tests.

OUT=

specifies the name of an output SAS data set that contains the test results. The format of the OUT= data set produced by the TEST statement is similar to that of the OUTEST= data set.

WEIGHT Statement

WEIGHT *variable* ;

The WEIGHT statement specifies a variable to supply weighting values to use for each observation in estimating parameters.

If the weight of an observation is nonpositive, that observation is not used for the estimation. *Variable* must be a numeric variable in the input data set. The regressors and the dependent variables are multiplied by the square root of the weight variable to form the weighted **X** matrix and the weighted dependent variable. The same weight is used for all MODEL statements.

Details: ENTROPY Procedure

Shannon's measure of entropy for a distribution is given by

$$\begin{aligned} &\text{maximize} && -\sum_{i=1}^n p_i \ln(p_i) \\ &\text{subject to} && \sum_{i=1}^n p_i = 1 \end{aligned}$$

where p_i is the probability associated with the i th support point. Properties that characterize the entropy measure are set forth by Kapur and Kesavan (1992).

The objective is to maximize the entropy of the distribution with respect to the probabilities p_i and subject to constraints that reflect any other known information about the distribution (Jaynes 1957). This measure, in the absence of additional information, reaches a maximum when the probabilities are uniform. A distribution other than the uniform distribution arises from information already known.

Generalized Maximum Entropy

Reparameterization of the errors in a regression equation is the process of specifying a support for the errors, observation by observation. If a two-point support is used, the error for the t th observation is reparameterized by setting $e_t = w_{t1} v_{t1} + w_{t2} v_{t2}$, where v_{t1} and v_{t2} are the upper and lower bounds for the t th error e_t , and w_{t1} and w_{t2} represent the weight associated with the point v_{t1} and v_{t2} . The error distribution is usually chosen to be symmetric, centered around zero, and the same across observations so that $v_{t1} = -v_{t2} = R$, where R is the support value chosen for the problem (Golan, Judge, and Miller 1996).

The generalized maximum entropy (GME) formulation was proposed for the ill-posed or underdetermined case where there is insufficient data to estimate the model with traditional methods. β is reparameterized by defining a support for β (and a set of weights in the cross entropy case), which defines a prior distribution for β .

In the simplest case, each β_k is reparameterized as $\beta_k = p_{k1} z_{k1} + p_{k2} z_{k2}$, where p_{k1} and p_{k2} represent the probabilities ranging from [0,1] for each β , and z_{k1} and z_{k2} represent the lower and upper bounds placed on β_k . The support points, z_{k1} and z_{k2} , are usually distributed symmetrically around the most likely value for β_k based on some prior knowledge.

With these reparameterizations, the GME estimation problem is

$$\begin{aligned} &\text{maximize} && H(p, w) = -p' \ln(p) - w' \ln(w) \\ &\text{subject to} && y = X Z p + V w \\ & && 1_K = (I_K \otimes 1'_L) p \\ & && 1_T = (I_T \otimes 1'_L) w \end{aligned}$$

where y denotes the column vector of length T of the dependent variable; \mathbf{X} denotes the $(T \times K)$ matrix of observations of the independent variables; p denotes the LK column vector of weights associated with the points in Z ; w denotes the LT column vector of weights associated with the points in V ; 1_K , 1_L , and 1_T are K -, L -, and T -dimensional column vectors, respectively, of ones; and I_K and I_T are $(K \times K)$ and $(T \times T)$ dimensional identity matrices.

These equations can be rewritten using set notation as follows:

$$\begin{aligned} \text{maximize } H(p, w) &= - \sum_{l=1}^L \sum_{k=1}^K p_{kl} \ln(p_{kl}) - \sum_{l=1}^L \sum_{t=1}^T w_{tl} \ln(w_{tl}) \\ \text{subject to } y_t &= \sum_{l=1}^L \left[\sum_{k=1}^K (X_{kt} Z_{kl} p_{kl}) + V_{tl} w_{tl} \right] \\ \sum_{l=1}^L p_{kl} &= 1 \text{ and } \sum_{l=1}^L w_{tl} = 1 \end{aligned}$$

The subscript l denotes the support point ($l=1, 2, \dots, L$), k denotes the parameter ($k=1, 2, \dots, K$), and t denotes the observation ($t=1, 2, \dots, T$).

The GME objective is strictly concave; therefore, a unique solution exists. The optimal estimated probabilities, p and w , and the prior supports, Z and V , can be used to form the point estimates of the unknown parameters, β , and the unknown errors, e .

Generalized Cross Entropy

Kullback and Leibler (1951) cross entropy measures the “discrepancy” between one distribution and another. Cross entropy is called a measure of discrepancy rather than distance because it does not satisfy some of the properties one would expect of a distance measure. (See Kapur and Kesavan (1992) for a discussion of cross entropy as a measure of discrepancy.) Mathematically, cross entropy is written as

$$\begin{aligned} \text{minimize } & \sum_{i=1}^n p_i \ln(p_i / q_i) \\ \text{subject to } & \sum_{i=1}^n p_i = 1, \end{aligned}$$

where q_i is the probability associated with the i th point in the distribution from which the discrepancy is measured. The q_i (in conjunction with the support) are often referred to as the prior distribution. The measure is nonnegative and is equal to zero when p_i equals q_i . The properties of the cross entropy measure are examined by Kapur and Kesavan (1992).

The principle of minimum cross entropy (Kullback 1959; Good 1963) states that one should choose probabilities that are as close as possible to the prior probabilities. That is, out of all probability distributions that

satisfy a given set of constraints which reflect known information about the distribution, choose the distribution that is closest (as measured by $p(\ln(p) - \ln(q))$) to the prior distribution. When the prior distribution is uniform, maximum entropy and minimum cross entropy produce the same results (Kapur and Kesavan 1992), where the higher values for entropy correspond exactly with the lower values for cross entropy.

If the prior distributions are nonuniform, the problem can be stated as a generalized cross entropy (GCE) formulation. The cross entropy terminology specifies weights, q_i and u_i , for the points Z and V , respectively. Given informative prior distributions on Z and V , the GCE problem is

$$\begin{aligned} \text{minimize} \quad & I(p, q, w, u) = p' \ln(p/q) + w' \ln(w/u) \\ \text{subject to} \quad & y = X Z p + V w \\ & 1_K = (I_K \otimes 1'_L) p \\ & 1_T = (I_T \otimes 1'_L) w \end{aligned}$$

where y denotes the T column vector of observations of the dependent variables; X denotes the $(T \times K)$ matrix of observations of the independent variables; q and p denote LK column vectors of prior and posterior weights, respectively, associated with the points in Z ; u and w denote the LT column vectors of prior and posterior weights, respectively, associated with the points in V ; 1_K , 1_L , and 1_T are K -, L -, and T -dimensional column vectors, respectively, of ones; and I_K and I_T are $(K \times K)$ and $(T \times T)$ dimensional identity matrices.

The optimization problem can be rewritten using set notation as follows

$$\begin{aligned} \text{minimize} \quad & I(p, q, w, u) = \sum_{l=1}^L \sum_{k=1}^K p_{kl} \ln(p_{kl}/q_{kl}) + \sum_{l=1}^L \sum_{t=1}^T w_{tl} \ln(w_{tl}/u_{tl}) \\ \text{subject to} \quad & y_t = \sum_{l=1}^L \left[\sum_{k=1}^K (X_{kt} Z_{kl} p_{kl}) + V_{tl} w_{tl} \right] \\ & \sum_{l=1}^L p_{kl} = 1 \quad \text{and} \quad \sum_{l=1}^L w_{tl} = 1 \end{aligned}$$

The subscript l denotes the support point ($l=1, 2, \dots, L$), k denotes the parameter ($k=1, 2, \dots, K$), and t denotes the observation ($t=1, 2, \dots, T$).

The objective function is strictly convex; therefore, there is a unique global minimum for the problem (Golan, Judge, and Miller 1996). The optimal estimated weights, p and w , and the prior supports, Z and V , can be used to form the point estimates of the unknown parameters, β , and the unknown errors, e , by using

$$\beta = Z p = \begin{bmatrix} z_{11} & \cdots & z_{L1} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & z_{12} & \cdots & z_{L2} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & z_{1K} & \cdots & z_{LK} \end{bmatrix} \begin{bmatrix} p_{11} \\ \vdots \\ p_{L1} \\ p_{12} \\ \vdots \\ p_{L2} \\ \vdots \\ p_{1K} \\ \vdots \\ p_{LK} \end{bmatrix}$$

$$e = V w = \begin{bmatrix} v_{11} & \cdots & v_{L1} & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & v_{12} & \cdots & v_{L2} & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & v_{1T} & \cdots & v_{LT} \end{bmatrix} \begin{bmatrix} w_{11} \\ \vdots \\ w_{L1} \\ w_{12} \\ \vdots \\ w_{L2} \\ \vdots \\ w_{1T} \\ \vdots \\ w_{LT} \end{bmatrix}$$

Computational Details

This constrained estimation problem can be solved either directly (primal) or by using the dual form. Either way, it is prudent to factor out one probability for each parameter and each observation as the sum of the other probabilities. This factoring reduces the computational complexity significantly. If the primal formalization is used and two support points are used for the parameters and the errors, the resulting GME problem is $O((nparams + nobs)^3)$. For the dual form, the problem is $O((nobs)^3)$. Therefore for large data sets, GME-M should be used instead of GME.

Moment Generalized Maximum Entropy

The default estimation technique is moment generalized maximum entropy (GME-M). This is simply GME with the data constraints modified by multiplying both sides by X' . GME-M then becomes

$$\begin{aligned}
&\text{maximize} && H(p, w) = -p' \ln(p) - w' \ln(w) \\
&\text{subject to} && X'y = X'X Z p + X'V w \\
&&& 1_K = (I_K \otimes 1'_L) p \\
&&& 1_T = (I_T \otimes 1'_L) w
\end{aligned}$$

There is also the cross entropy version of GME-M, which has the same form as GCE but with the moment constraints.

GME versus GME-M

GME-M is more computationally attractive than GME for large data sets because the computational complexity of the estimation problem depends primarily on the number of parameters and not on the number of observations. GME-M is based on the first moment of the data, whereas GME is based on the data itself. If the distribution of the residuals is well defined by its first moment, then GME-M is a good choice. So if the residuals are normally distributed or exponentially distributed, then GME-M should be used. On the other hand if the distribution is Cauchy, lognormal, or some other distribution where the first moment does not describe the distribution, then use GME. See [Example 13.1](#) for an illustration of this point.

Maximum Entropy-Based Seemingly Unrelated Regression

In a multivariate regression model, the errors in different equations might be correlated. In this case, the efficiency of the estimation can be improved by taking these cross-equation correlations into account. Seemingly unrelated regression (SUR), also called joint generalized least squares (JGLS) or Zellner estimation, is a generalization of OLS for multi-equation systems.

Like SUR in the least squares setting, the generalized maximum entropy SUR (GME-SUR) method assumes that all the regressors are independent variables and uses the correlations among the errors in different equations to improve the regression estimates. The GME-SUR method requires an initial entropy regression to compute residuals. The entropy residuals are used to estimate the cross-equation covariance matrix.

In the iterative GME-SUR (ITGME-SUR) case, the preceding process is repeated by using the residuals from the GME-SUR estimation to estimate a new cross-equation covariance matrix. ITGME-SUR method alternates between estimating the system coefficients and estimating the cross-equation covariance matrix until the estimated coefficients and covariance matrix converge.

The estimation problem becomes the generalized maximum entropy system adapted for multi-equations as follows:

$$\begin{aligned}
& \text{maximize} && H(p, w) = -p' \ln(p) - w' \ln(w) \\
& \text{subject to} && y = X Z p + V w \\
& && 1_{KM} = (I_{KM} \otimes 1'_L) p \\
& && 1_{MT} = (I_{MT} \otimes 1'_L) w
\end{aligned}$$

where

$$\beta = Z p$$

$$Z = \begin{bmatrix}
z_{11}^1 & \cdots & z_{L1}^1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & \ddots & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & z_{11}^K & \cdots & z_{L1}^K & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & z_{1M}^1 & \cdots & z_{LM}^1 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & z_{1M}^K & \cdots & z_{LM}^K
\end{bmatrix}$$

$$p = [p_{11}^1 \cdot p_{L1}^1 \cdot p_{11}^K \cdot p_{L1}^K \cdot p_{1M}^1 \cdot p_{LM}^1 \cdot p_{1M}^K \cdot p_{LM}^K]'$$

$$e = V w$$

$$V = \begin{bmatrix}
v_{11}^1 & \cdots & v_{11}^L & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & \ddots & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & v_{1T}^1 & \cdots & v_{1T}^L & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & v_{M1}^1 & \cdots & v_{M1}^L & 0 & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & \ddots & 0 & 0 & 0 \\
0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & v_{MT}^1 & \cdots & v_{MT}^L
\end{bmatrix}$$

$$w = [w_{11}^1 \cdot w_{11}^L \cdot w_{1T}^1 \cdot w_{1T}^L \cdot w_{M1}^1 \cdot w_{M1}^L \cdot w_{MT}^1 \cdot w_{MT}^L]'$$

y denotes the MT column vector of observations of the dependent variables; \mathbf{X} denotes the $(MT \times KM)$ matrix of observations for the independent variables; p denotes the LKM column vector of weights associated with the points in Z ; w denotes the LMT column vector of weights associated with the points in V ; 1_L , 1_{KM} , and 1_{MT} are L -, KM -, and MT -dimensional column vectors, respectively, of ones; and \mathbf{I}_{KM} and \mathbf{I}_{MT} are $(KM \times KM)$ and $(MT \times MT)$ dimensional identity matrices. The subscript l denotes the support point ($l = 1, 2, \dots, L$), k denotes the parameter ($k = 1, 2, \dots, K$), m denotes the equation ($m = 1, 2, \dots, M$), and t denotes the observation ($t = 1, 2, \dots, T$).

Using this notation, the maximum entropy problem that is analogous to the OLS problem used as the initial step of the traditional SUR approach is

$$\begin{aligned} &\text{maximize} && H(p, w) = -p' \ln(p) - w' \ln(w) \\ &\text{subject to} && (y - X Z p) = \sqrt{\Sigma} V w \\ &&& 1_{KM} = (I_{KM} \otimes 1'_L) p \\ &&& 1_{MT} = (I_{MT} \otimes 1'_L) w \end{aligned}$$

The results are GME-SUR estimates with independent errors, the analog of OLS. The covariance matrix $\hat{\Sigma}$ is computed based on the residual of the equations, $Vw = e$. An $L'L$ factorization of the $\hat{\Sigma}$ is used to compute the square root of the matrix.

After solving this problem, these entropy-based estimates are analogous to the Aitken two-step estimator. For iterative GME-SUR, the covariance matrix of the errors is recomputed, and a new $\hat{\Sigma}$ is computed and factored. As in traditional ITSUR, this process repeats until the covariance matrix and the parameter estimates converge.

The estimation of the parameters for the normed-moment version of SUR (GME-SUR-NM) uses an identical process. The constraints for GME-SUR-NM is defined as:

$$X'y = X'(\mathbf{S}^{-1} \otimes \mathbf{I})X Z p + X'(\mathbf{S}^{-1} \otimes \mathbf{I})V w$$

The estimation of the parameters for GME-SUR-NM uses an identical process as outlined previously for GME-SUR.

Generalized Maximum Entropy for Multinomial Discrete Choice Models

Multinomial discrete choice models take the form of an experiment that consists of n trials. On each trial, one of k alternatives is observed. If y_{ij} is the random variable that takes on the value 1 when alternative j is selected for the i th trial and 0 otherwise, then the probability that y_{ij} is 1, conditional on a vector of regressors X_i and unknown parameter vector β_j , is

$$\Pr(y_{ij} = 1 | X_i, \beta_j) = G(X_i' \beta_j)$$

where $G()$ is a link function. For noisy data the model becomes:

$$y_{ij} = G(X_i' \beta_j) + \epsilon_{ij} = p_{ij} + \epsilon_{ij}$$

The standard maximum likelihood approach for multinomial logit is equivalent to the maximum entropy solution for discrete choice models. The generalized maximum entropy approach avoids an assumption of the form of the link function $G()$.

The generalized maximum entropy for discrete choice models (GME-D) is written in primal form as

$$\begin{aligned} \text{maximize} \quad & H(p, w) = -p' \ln(p) - w' \ln(w) \\ \text{subject to} \quad & (I_j \otimes X' y) = (I_j \otimes X') p + (I_j \otimes X') V w \\ & \sum_j^k p_{ij} = 1 \quad \text{for } i = 1 \text{ to } N \\ & \sum_m^L w_{ijm} = 1 \quad \text{for } i = 1 \text{ to } N \text{ and } j = 1 \text{ to } k \end{aligned}$$

Golan, Judge, and Miller (1996) have shown that the dual unconstrained formulation of the GME-D can be viewed as a general class of logit models. Additionally, as the sample size increases, the solution of the dual problem approaches the maximum likelihood solution. Because of these characteristics, only the dual approach is available for the GME-D estimation method.

The parameters β_j are the Lagrange multipliers of the constraints. The covariance matrix of the parameter estimates is computed as the inverse of the Hessian of the dual form of the objective function.

Censored or Truncated Dependent Variables

In practice, you might find that variables are not always measured throughout their natural ranges. A given variable might be recorded continuously in a range, but, outside of that range, only the endpoint is denoted. In other words, say that the data generating process is:

$$y_i = \mathbf{x}_{i\epsilon} + \epsilon.$$

However, you observe the following:

$$y_i^* = \begin{cases} ub & : y_i \geq ub \\ \mathbf{x}_{i\epsilon} + \epsilon & : lb < y_i < ub \\ lb & : y_i \leq lb \end{cases}$$

The primal problem is simply a slight modification of the primal formulation for GME-GCE. You specify different supports for the errors in the truncated or censored region, perhaps reflecting some nonsample information. Then the data constraints are modified. The constraints that arise in the censored areas are changed to inequality constraints (Golan, Judge, and Perloff 1997). Let the variable \mathbf{X}^u denote the observations of the explanatory variable where censoring occurs from the top, \mathbf{X}^l from the bottom, and \mathbf{X}^a in the middle region (no censoring). Let, \mathbf{V}^u be the supports for the observations at the upper bound, \mathbf{V}^l lower bound, and \mathbf{V}^a in the middle.

You have:

$$\begin{bmatrix} \mathbf{y}^u \geq ub \\ \mathbf{y}^a \\ \mathbf{y}^l \leq lb \end{bmatrix} = \begin{bmatrix} \mathbf{X}^u \\ \mathbf{X}^a \\ \mathbf{X}^l \end{bmatrix} \mathbf{Zp} + \begin{bmatrix} \mathbf{V}^u \mathbf{w}^u \\ \mathbf{V}^a \mathbf{w}^a \\ \mathbf{V}^l \mathbf{w}^l \end{bmatrix}$$

The primal problem then becomes

$$\begin{aligned}
 &\text{maximize} && H(p, w) = -p' \ln(p) - w' \ln(w) \\
 &\text{subject to} && \mathbf{y}^a = \mathbf{X}^a \mathbf{V}^a p + \mathbf{V}^a \mathbf{w}^a \\
 & && \mathbf{y}^u \geq \mathbf{X}^u \mathbf{V}^u p + \mathbf{V}^u \mathbf{w}^u \\
 & && \mathbf{y}^l \leq \mathbf{X}^l \mathbf{V}^l p + \mathbf{V}^l \mathbf{w}^l \\
 & && \mathbf{1}_K = (\mathbf{I}_K \otimes \mathbf{1}'_L) p \\
 & && \mathbf{1}_T = (\mathbf{I}_T \otimes \mathbf{1}'_L) w
 \end{aligned}$$

PROC ENTROPY requires that the number of supports be identical for all three regions.

Alternatively, you can think of cases where the dependent variable is observed continuously for most of its range. However, the variable's range is reported for some observations. Such data is often found in highly disaggregated state level employment measures.

$$y_i^* = \begin{cases} \text{missing} & : l_1 \leq y \leq r_1 \\ \vdots & : \vdots \\ \text{missing} & : l_k \leq y \leq r_k \\ \mathbf{x}_{i_k} + \epsilon & : \text{otherwise} \end{cases}$$

Just as in the censored case, each range yields two inequality constraints for each observation in that range.

Information Measures

PROC ENTROPY returns several measures of fit. First, the value of the objective function is returned. Next, the signal entropy is provided followed by the noise entropy. The sum of the noise and signal entropies should equal the value of the objective function. The next two metrics that follow are the normed entropies of both the signal and the noise.

Normalized entropy (NE) measures the relative informational content of both the signal and noise components through p and w , respectively (Golan, Judge, and Miller 1996). Let S denote the normalized entropy of the signal, $X\beta$, defined as:

$$S(\tilde{p}) = \frac{-\tilde{p}' \ln(\tilde{p})}{-q' \ln(q)}$$

where $S(\tilde{p}) \in [0, 1]$. In the case of GME, where uniform priors are assumed, S can be written as:

$$S(\tilde{p}) = \frac{-\tilde{p}' \ln(\tilde{p})}{\sum_i \ln(M_i)}$$

where M_i is the number of support points for parameter i . A value of 0 for S implies that there is no uncertainty regarding the parameters; hence, it is a degenerate situation. However, a value of 1 implies that the posterior distributions equal the priors, which indicates total uncertainty if the priors are uniform.

Because NE is relative, it can be used for comparing various situations. Consider adding a data point to the model. If $S_{T+1} = S_T$, then there is no additional information contained within that data constraint. However, if $S_{T+1} < S_T$, then the data point gives a more informed set of parameter estimates.

NE can be used for determining the importance of particular variables with regard to the reduction of the uncertainty they bring to the model. Each of the k parameters that is estimated has an associated NE defined as

$$S(\tilde{p}_k) = \frac{-\tilde{p}'_k \ln(\tilde{p}_k)}{-\ln(q_k)}$$

or, in the GME case,

$$S(\tilde{p}_k) = \frac{-\tilde{p}'_k \ln(\tilde{p}_k)}{\ln(M)}$$

where \tilde{p}_k is the vector of supports for parameter β_k and M is the corresponding number of support points. Since a value of 1 implies no relative information for that particular sample, Golan, Judge, and Miller (1996) suggest an exclusion criteria of $S(\tilde{p}_k) > 0.99$ as an acceptable means of selecting noninformative variables. See Golan, Judge, and Miller (1996) for some simulation results.

The final set of measures of fit are the parameter information index and error information index. These measures can be best summarized as 1 – the appropriate normed entropy.

Parameter Covariance For GCE

For the cross-entropy problem, the estimate of the asymptotic variance of the signal parameter is given by:

$$\hat{Var}(\hat{\beta}) = \frac{\hat{\sigma}_y^2(\hat{\beta})}{\hat{\psi}^2(\hat{\beta})} (X'X)^{-1}$$

where

$$\hat{\sigma}_y^2(\hat{\beta}) = \frac{1}{N} \sum_{i=1}^N \gamma_i^2$$

and γ_i is the Lagrange multiplier associated with the i th row of the Vw constraint matrix. Also,

$$\hat{\psi}^2(\hat{\beta}) = \left[\frac{1}{N} \sum_{i=1}^N \left(\sum_{j=1}^J v_{ij}^2 w_{ij} - \left(\sum_{j=1}^J v_{ij} w_{ij} \right)^2 \right)^{-1} \right]^2$$

Parameter Covariance For GCE-M

Golan, Judge, and Miller (1996) give the finite approximation to the asymptotic variance matrix of the moment formulation as:

$$\hat{Var}(\hat{\beta}) = \Sigma_z X' X C^{-1} D C^{-1} X' X \Sigma_z$$

where

$$C = X'X\Sigma_zX'X + \Sigma_v$$

and

$$D = X'\Sigma_eX$$

Recall that in the moment formulation, V is the support of $\frac{X'e}{T}$, which implies that Σ_v is a K -dimensional variance matrix. Σ_z and Σ_v are both diagonal matrices with the form

$$\Sigma_z = \begin{bmatrix} \sum_{l=1}^L z_{1l}^2 p_{1l} - (\sum_{l=1}^L z_{1l} p_{1l})^2 & 0 & 0 \\ 0 & \ddots & 0 \\ 0 & 0 & \sum_{l=1}^L z_{Kl}^2 p_{Kl} - (\sum_{l=1}^L z_{Kl} p_{Kl})^2 \end{bmatrix}$$

and

$$\Sigma_v = \begin{bmatrix} \sum_{j=1}^J v_{1j}^2 w_{1j} - (\sum_{j=1}^J v_{1j} w_{1j})^2 & 0 & 0 \\ 0 & \ddots & 0 \\ 0 & 0 & \sum_{j=1}^J v_{Kj}^2 w_{Kj} - (\sum_{j=1}^J v_{Kj} w_{Kj})^2 \end{bmatrix}$$

Statistical Tests

Since the GME estimates have been shown to be asymptotically normally distributed, the classical Wald, Lagrange multiplier, and likelihood ratio statistics can be used for testing linear restrictions on the parameters.

Wald Tests

Let $H_0 : L\beta = m$, where L is a set of linearly independent combinations of the elements of β . Then under the null hypothesis, the Wald test statistic,

$$T_W = (L\hat{\beta} - m)' \left(L(\hat{Var}(\hat{\beta}))L' \right)^{-1} (L\hat{\beta} - m)$$

has a central χ^2 limiting distribution with degrees of freedom equal to the rank of L .

Pseudo-Likelihood Ratio Tests

Using the conditionally maximized entropy function as a pseudo-likelihood, F , Mittelhammer and Cardell (2000) state that:

$$\frac{2\hat{\psi}(\hat{\beta})}{\hat{\sigma}_y^2(\hat{\beta})} \left(F(\hat{\beta}) - F(\tilde{\beta}) \right)$$

has the limiting distribution of the Wald statistic when testing the same hypothesis. Note that $F(\hat{\beta})$ and $F(\tilde{\beta})$ are the maximum values of the entropy objective function over the full and restricted parameter spaces, respectively.

Lagrange Multiplier Tests

Again using the GME function as a pseudo-likelihood, Mittelhammer and Cardell (2000) define the Lagrange multiplier statistic as:

$$\frac{1}{\hat{\sigma}_y^2(\tilde{\beta})} G(\tilde{\beta})'(X'X)^{-1} G(\tilde{\beta})$$

where G is the gradient of F , which is being evaluated at the optimum point for the restricted parameters. This test statistic shares the same limiting distribution as the Wald and pseudo-likelihood ratio tests.

Missing Values

If an observation in the input data set contains a missing value for any of the regressors or dependent values, that observation is dropped from the analysis.

Input Data Sets

DATA= Data Set

The DATA= data set specified in the PROC ENTROPY statement is the data set that contains the data to be analyzed.

PDATA= Data Set

The PDATA= data set specified in the PROC ENTROPY statement specifies the support points and prior probabilities to be used in the estimation. The PDATA= can be used in lieu of a PRIORS statement, but is intended for use in conjunction with the OUTP= option. Once priors are entered through a PRIORS statement, they can be reused in subsequent estimations by specifying the PDATA= option.

The variables in the data set are as follows:

- BY variables (if any)
- _TYPE_, a character variable of length 8 that identifies the estimation method: GME or GMEM. This is an optional column.
- variable, a character variable of length 32 that indicates the name of the regressor. The regressor name and the equation name identify a unique coefficient. This is required.
- _OBS_, a numeric variable that is either missing when the probabilities are for coefficients or the observation number when the probabilities are for the residual terms. The _OBS_ and the equation name identify which residual the probability is associated with. This an optional column.
- equation, a character variable of length 32 indicating the name of the dependent variable. This is a required column.
- NSupport, a numeric variable that indicates the number of support points for each basis. This variable is required.
- support, a numeric variable that is the support value the probability is associated with. This is a required column.
- prior, a numeric variable that is the prior probability associated with the probability. This is a required column.
- Prb, a numeric variable that is the estimated probability. This is optional.

SDATA= Data Set

The SDATA= data set specifies a data set that provides the covariance matrix of the equation errors. The matrix read from the SDATA= data set is used for the equation covariance matrix (**S** matrix) in the estimation. (The SDATA= **S** matrix is used to provide only the initial estimate of **S** for the methods that iterate the **S** matrix.)

Output Data Sets

OUT= Data Set

The OUT= data set specified in the PROC ENTROPY statement contains residuals of the dependent variables computed from the parameter estimates. The ID and BY variables are also added to this data set.

OUTEST= Data Set

The OUTEST= data set contains parameter estimates and, if requested via the COVOUT option, estimates of the covariance of the parameter estimates.

The variables in the data set are as follows:

- BY variables
- _NAME_, a character variable of length 32, blank for observations that contain parameter estimates or a parameter name for observations that contain covariances
- _TYPE_, a character variable of length 8 that identifies the estimation method: GME or GMEM
- the parameters estimated

If the COVOUT option is specified, an additional observation is written for each row of the estimate of the covariance matrix of parameter estimates, with the _NAME_ values containing the parameter names for the rows.

OUTP= Data Set

The OUTP= data set specified in the PROC ENTROPY statement contains the probabilities estimated for each support point, as well as the support points and prior probabilities used in the estimation.

The variables in the data set are as follows:

- BY variables (if any)
- _TYPE_, a character variable of length 8 that identifies the estimation method: GME or GMEM.
- variable, a character variable of length 32 that indicates the name of the regressor. The regressor name and the equation name identify a unique coefficient.
- _OBS_, a numeric variable that is either missing when the probabilities are for coefficients or the observation number when the probabilities are for the residual terms. The _OBS_ and the equation name identify which residual the probability is associated with.
- equation, a character variable of length 32 that indicates the name of the dependent variable

- NSupport, a numeric variable that indicates the number of support points for each basis
- support, a numeric variable that is the support value the probability is associated with
- prior, a numeric variable that is the prior probability associated with the probability
- Prb, a numeric variable that is the estimated probability

OUTL= Data Set

The OUTL= data set specified in the PROC ENTROPY statement contains the Lagrange multiplier values for the underlying maximum entropy problem.

The variables in the data set are as follows:

- BY variables
- equation, a character variable of length 32 that indicates the name of the dependent variable
- variable, a character variable of length 32 that indicates the name of the regressor. The regressor name and the equation name identify a unique coefficient.
- _OBS_, a numeric variable that is either missing when the probabilities are for coefficients or the observation number when the probabilities are for the residual terms. The _OBS_ and the equation name identify which residual the Lagrange multiplier is associated with
- LagrangeMult, a numeric variable that contains the Lagrange multipliers

ODS Table Names

PROC ENTROPY assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 13.2 ODS Tables Produced in PROC ENTROPY

ODS Table Name	Description	Option
ConvCrit	Convergence criteria for estimation	default
ConvergenceStatus	Convergence status	default
DatasetOptions	Data sets used	default
MinSummary	Number of parameters, estimation kind	default
ObsUsed	Observations read, used, and missing	default
ParameterEstimates	Parameter estimates	default
ResidSummary	Summary of the SSE, MSE for the equations	default
TestResults	Test statement table	TEST statement

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the ENTROPY procedure.

ODS Graph Names

PROC ENTROPY assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when using ODS. The names are listed in [Table 13.3](#).

To request these graphs, you must specify the ODS GRAPHICS statement.

Table 13.3 ODS Graphics Produced by PROC ENTROPY

ODS Graph Name	Plot Description
DiagnosticsPanel	Includes all the plots listed below
FitPlot	Predicted versus actual plot
CooksD	Cook’s D plot
QQPlot	Q-Q plot of residuals
StudentResidualPlot	Studentized residual plot
ResidualHistogram	Histogram of the residuals

Examples: ENTROPY Procedure

Example 13.1: Nonnormal Error Estimation

This example illustrates the difference between GME-M and GME. One of the basic assumptions of OLS estimation is that the errors in the estimation are normally distributed. If this assumption is violated, the estimated parameters are biased. For GME-M, the story is similar. If the first moment of the distribution of the errors and a scale factor cannot be used to describe the distribution, then the parameter estimates from

GME-MN are more biased. GME is much less sensitive to the underlying distribution of the errors than GME-M.

To illustrate this, data for the following model is simulated with three different error distributions:

$$y = a * x_1 + b * x_2 + \epsilon.$$

For the first simulation, ϵ is distributed normally, then a chi-squared distribution with six degrees of freedom is assumed for the second simulation, and finally ϵ is assumed to have a Cauchy distribution in the third simulation.

In each of the three simulations, 100 samples of 10 observations each were simulated. The data for the model with the Cauchy error distribution is generated using the following DATA step code:

```
data one;
  call streaminit(156789);
  do by = 1 to 100;
    do x2 = 1 to 10;
      x1 = 10 * ranuni( 512);
      y = x1 + 2*x2 + rand('cauchy');
      output;
    end;
  end;
run;
```

The statements for the other distributions are identical except for the argument to the RAND() function.

The parameters to the model were estimated by using maximum entropy with the following programming statements:

```
proc entropy data=one gme outest=parm1;
  model y = x1 x2;
  by by;
run;
```

The estimation by using moment-constrained maximum entropy was performed by changing the GME option to GMEM. For comparison, the same model was estimated by using OLS with the following PROC REG statements:

```
proc reg data=one outest=parm3;
  model y = x1 x2;
  by by;
run;
```

The 100 estimations of the coefficient on variable x1 are then summarized for each of the three error distributions by using PROC UNIVARIATE, as follows:

```
proc univariate data=parm1;
  var x1;
run;
```

The following table summarizes the results from the estimations. The true value for the coefficient on x1 is 1.0.

Estimation Method	Normal		Chi-Squared		Cauchy	
	Mean	Std Deviation	Mean	Std Deviation	Mean	Std Deviation
GME	0.418	0.117	0.626	.330	0.818	3.36
GME-M	0.878	0.116	0.948	0.427	3.03	13.62
OLS	0.973	0.142	1.023	0.467	5.54	26.83

For normally distributed or nearly normally distributed data, moment-constrained maximum entropy is a good choice. For distributions not well described by a normal distribution, data-constrained maximum entropy is a good choice.

Example 13.2: Unreplicated Factorial Experiments

Factorial experiments are useful for studying the effects of various factors on a response. For the practitioner constrained to the use of OLS regression, there must be replication to estimate all of the possible main and interaction effects in a factorial experiment. Using OLS regression to analyze unreplicated experimental data results in zero degrees of freedom for error in the ANOVA table, since there are as many parameters as observations. This situation leaves the experimenter unable to compute confidence intervals or perform hypothesis testing on the parameter estimates.

Several options are available when replication is impossible. The higher-order interactions can be assumed to have negligible effects, and their degrees of freedom can be pooled to create the error degrees of freedom used to perform inference on the lower-order estimates. Or, if a preliminary experiment is being run, a normal probability plot of all effects can provide insight as to which effects are significant, and therefore focused, in a later, more complete experiment.

The following example illustrates the probability plot methodology and the alternative by using PROC ENTROPY. Consider a 2^4 factorial model with no replication. The data are taken from Myers and Montgomery (1995).

```

data rate;
  do a=-1,1; do b=-1,1; do c=-1,1; do d=-1,1;
    input y @@;
    ab=a*b; ac=a*c; ad=a*d; bc=b*c; bd=b*d; cd=c*d;
    abc=a*b*c; abd=a*b*d; acd=a*c*d; bcd=b*c*d;
    abcd=a*b*c*d;
    output;
  end; end; end; end;
datalines;
45 71 48 65 68 60 80 65 43 100 45 104 75 86 70 96
;
run;

```

Analyze the data by using PROC REG, then output the resulting estimates.

```

proc reg data=rate outest=regout;
  model y=a b c d ab ac ad bc bd cd abc abd acd bcd abcd;
run;

proc transpose data=regout out=ploteff name=effect prefix=est;
  var a b c d ab ac ad bc bd cd abc abd acd bcd abcd;
run;

```

Now the normal scores for the estimates can be computed with the rank procedure as follows:

```

proc rank data=ploteff normal=blom out=qqplot;
  var est1;
  ranks normalq;
run;

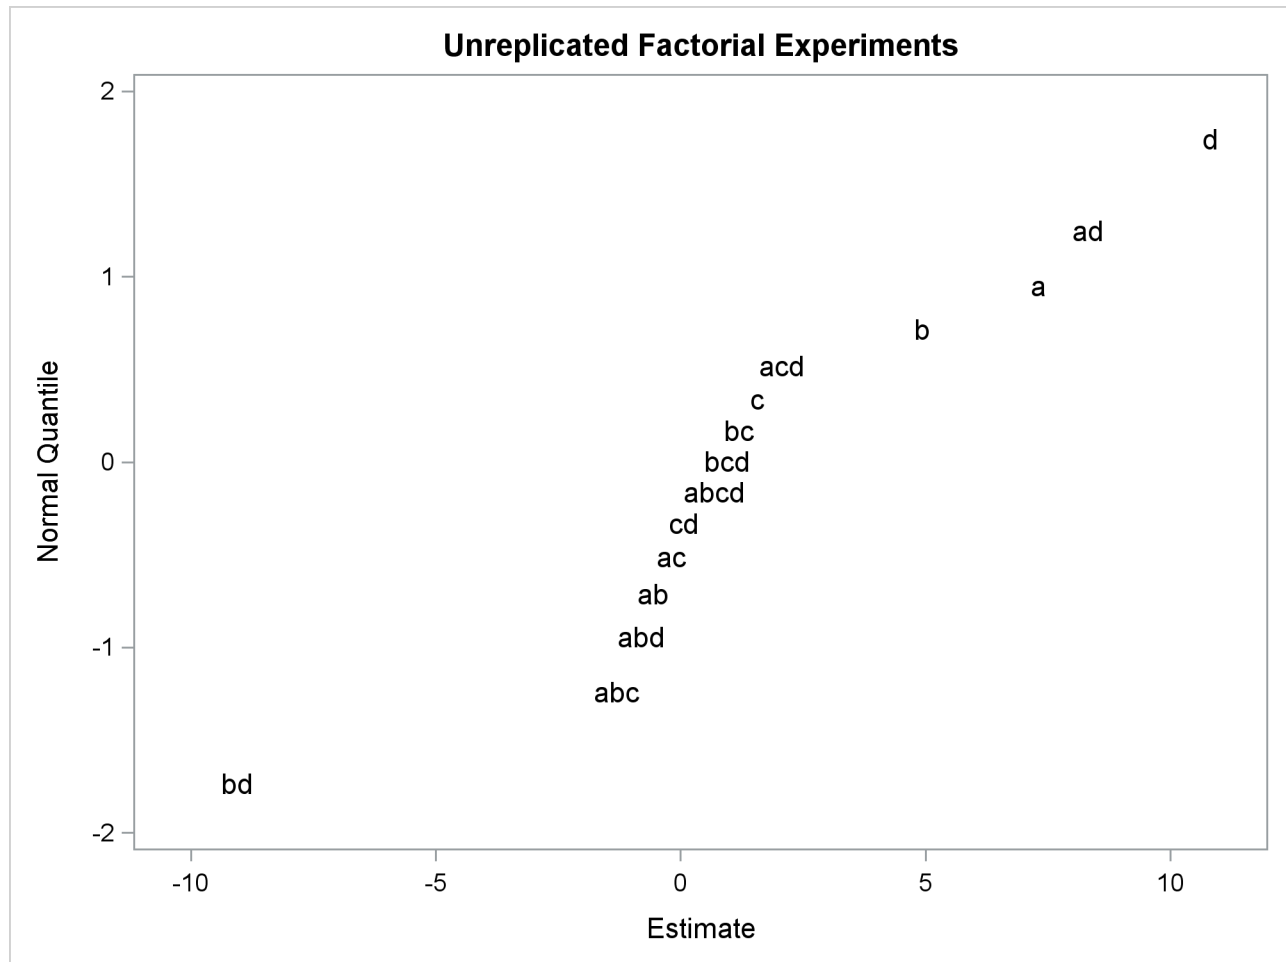
```

To create the probability plot, simply plot the estimates versus their normal scores by using PROC SGPLOT as follows:

```

title "Unreplicated Factorial Experiments";
proc sgplot data=qqplot;
  scatter x=est1 y=normalq / markerchar=effect
                                markercharattrs=(size=10pt);
  xaxis label="Estimate";
  yaxis label="Normal Quantile";
run;

```


Output 13.2.1 Normal Probability Plot of Effects

The plot shown in [Output 13.2.1](#) displays evidence that the a, b, d, ad, and bd estimates do not fit into the purely random normal model, which suggests that they may have some significant effect on the response variable. To verify this, fit a reduced model that contains only these effects.

```
proc reg data=rate;
  model y=a b d ad bd;
run;
```

The estimates for the reduced model are shown in [Output 13.2.2](#).

Output 13.2.2 Reduced Model OLS Estimates

Unreplicated Factorial Experiments					
The REG Procedure					
Model: MODEL1					
Dependent Variable: y					
Parameter Estimates					
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t
Intercept	1	70.06250	1.10432	63.44	<.0001
a	1	7.31250	1.10432	6.62	<.0001
b	1	4.93750	1.10432	4.47	0.0012
d	1	10.81250	1.10432	9.79	<.0001
ad	1	8.31250	1.10432	7.53	<.0001
bd	1	-9.06250	1.10432	-8.21	<.0001

These results support the probability plot methodology.

PROC ENTROPY can directly estimate the full model without having to rely upon the probability plot for insight into which effects can be significant. To illustrate this, PROC ENTROPY is run by using default parameter and error supports in the following statements:

```
proc entropy data=rate;
  model y=a b c d ab ac ad bc bd cd abc abd acd bcd abcd;
run;
```

The resulting GME estimates are shown in [Output 13.2.3](#). Note that the parameter estimates associated with the a, b, d, ad, and bd effects are all significant.

Output 13.2.3 Full Model Entropy Results

Unreplicated Factorial Experiments				
The ENTROPY Procedure				
GME-M Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
a	5.688414	0.7911	7.19	<.0001
b	2.988032	0.5464	5.47	<.0001
c	0.234331	0.1379	1.70	0.1086
d	9.627308	0.9765	9.86	<.0001
ab	-0.01386	0.0270	-0.51	0.6149
ac	-0.00054	0.00325	-0.16	0.8712
ad	6.833076	0.8627	7.92	<.0001
bc	0.113908	0.0941	1.21	0.2435
bd	-7.68105	0.9053	-8.48	<.0001
cd	0.00002	0.000364	0.05	0.9569
abc	-0.14876	0.1087	-1.37	0.1900
abd	-0.0399	0.0516	-0.77	0.4509
acd	0.466938	0.1961	2.38	0.0300
bcd	0.059581	0.0654	0.91	0.3756
abcd	0.024785	0.0387	0.64	0.5312
Intercept	69.87294	1.1403	61.28	<.0001

Example 13.3: Censored Data Models in PROC ENTROPY

Data available to an analyst might sometimes be censored, where only part of the actual series is observed. Consider the case in which only observations greater than some lower bound are recorded, as defined by the following process:

$$y = \max(\mathbf{X}\boldsymbol{\beta} + \epsilon, lb).$$

Running ordinary least squares estimation on data generated by the preceding process is not optimal because the estimates are likely to be biased and inefficient. One alternative to estimating models with censored data is the tobit estimator. This model is supported in the QLIM procedure in SAS/ETS and in the LIFEREG procedure in SAS/STAT. PROC ENTROPY provides another alternative which can make it very easy to estimate such a model correctly.

The following DATA step generates censored data in which any negative values of the dependent variable, y , are set to a lower bound of 0.

```
data cens;
  do t = 1 to 100;
    x1 = 5 * ranuni(456);
    x2 = 10 * ranuni(456);
    y = 4.5*x1 + 2*x2 + 15 * rannor(456);
    if( y<0 ) then y = 0;
    output;
  end;
run;
```

To illustrate the effect of the censored option in PROC ENTROPY, the model is initially estimated without accounting for censoring in the following statements:

```
title "Censored Data Estimation";
proc entropy data = cens gme primal;
  priors intercept -32 32
        x1        -15 15
        x2        -15 15;
  model y = x1 x2 /
        esupports = (-25 1 25);
run;
```

Output 13.3.1 GME Estimates

Censored Data Estimation				
The ENTROPY Procedure				
GME Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
x1	2.377609	0.000503	4725.98	<.0001
x2	2.353014	0.000255	9244.87	<.0001
intercept	5.478121	0.00188	2906.41	<.0001

The previous model is reestimated by using the CENSORED option in the following statements:

```
proc entropy data = cens gme primal;
  priors intercept -32 32
        x1        -15 15
        x2        -15 15;
  model y = x1 x2 /
        esupports = (-25 1 25)
        censored(lb = 0, esupports=(-15 1 15) );
run;
```

Output 13.3.2 Entropy Estimates

Censored Data Estimation				
The ENTROPY Procedure				
GME Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
x1	4.429697	0.00690	641.85	<.0001
x2	1.46858	0.00349	420.61	<.0001
intercept	8.261412	0.0259	319.51	<.0001

The second set of entropy estimates are much closer to the true parameter estimates of 4.5 and 2. Since another alternative available for fitting a model of censored data is a tobit model, PROC QLIM is used in the following statements to fit a tobit model to the data:

```
proc qlim data=cens;
  model y = x1 x2;
  endogenous y ~ censored(lb=0);
run;
```

Output 13.3.3 QLIM Estimates

Censored Data Estimation					
The QLIM Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	2.979455	3.824252	0.78	0.4359
x1	1	4.882284	1.019913	4.79	<.0001
x2	1	1.374006	0.513000	2.68	0.0074
_Sigma	1	13.723213	1.032911	13.29	<.0001

For this data and code, PROC ENTROPY produces estimates that are closer to the true parameter values than those computed by PROC QLIM.

Example 13.4: Use of the PDATA= Option

It is sometimes useful to specify priors and supports by using the PDATA= option. This example illustrates how to create a PDATA= data set which contains the priors and support points for use in a subsequent

PROC ENTROPY step. In order to have a model to estimate in PROC ENTROPY, you must first have data to analyze. The following DATA step generates the data used in this analysis:

```

title "Using a PDATA= data set";
data a;
  array x[4];
  do t = 1 to 100;
    ys = -5;
    do k = 1 to 4;
      x[k] = rannor( 55372 ) ;
      ys = ys + x[k] * k;
    end;
    ys = ys + rannor( 55372 );
    output;
  end;
run;

```

Next you fit this data with some arbitrary parameter support points and priors by using the following PROC ENTROPY statements:

```

proc entropy data = a gme primal;
  priors          x1  -10(2) 30(1)
                  x2  -20(3) 30(2)
                  x3  -15(4) 30(4)
                  x4  -25(3) 30(2)
                  intercept -13(4) 30(2) ;
  model ys = x1 x2 x3 x4 / esupports=(-25 0 25);
run;

```

These statements produce the output shown in [Output 13.4.1](#).

Output 13.4.1 Output From PROC ENTROPY

Using a PDATA= data set				
The ENTROPY Procedure				
GME Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
x1	1.195688	0.1078	11.09	<.0001
x2	1.844903	0.1018	18.12	<.0001
x3	3.268396	0.1136	28.77	<.0001
x4	3.908194	0.0934	41.83	<.0001
intercept	-4.94319	0.1005	-49.21	<.0001

You can estimate the same model by first creating a PDATA= data set, which includes the same information as the PRIORS statement in the preceding PROC ENTROPY step.

A data set that defines the supports and priors for the model parameters is shown in the following statements:

```
data test;
  length Variable $ 12 Equation $ 12;
  input Variable $ Equation $ Nsupport Support Prior ;
datalines;
  Intercept . 2 -13 0.66667
  Intercept . 2 30 0.33333
  x1 . 2 -10 0.66667
  x1 . 2 30 0.33333
  x2 . 2 -20 0.60000
  x2 . 2 30 0.40000
  x3 . 2 -15 0.50000
  x3 . 2 30 0.50000
  x4 . 2 -25 0.60000
  x4 . 2 30 0.40000
;
```

The following statements reestimate the model by using these support points.

```
proc entropy data=a gme primal pdata=test;
  model ys = x1 x2 x3 x4 / esupports=(-25 0 25);
run;
```

These statements produce the output shown in [Output 13.4.2](#).

Output 13.4.2 Output From PROC ENTROPY with PDATA= option

Using a PDATA= data set				
The ENTROPY Procedure				
GME Variable Estimates				
Variable	Estimate	Approx Std Err	t Value	Approx Pr > t
x1	1.195686	0.1078	11.09	<.0001
x2	1.844902	0.1018	18.12	<.0001
x3	3.268395	0.1136	28.77	<.0001
x4	3.908194	0.0934	41.83	<.0001
Intercept	-4.94319	0.1005	-49.21	<.0001

These results are identical to the ones produced by the previous PROC ENTROPY step.

Example 13.5: Illustration of ODS Graphics

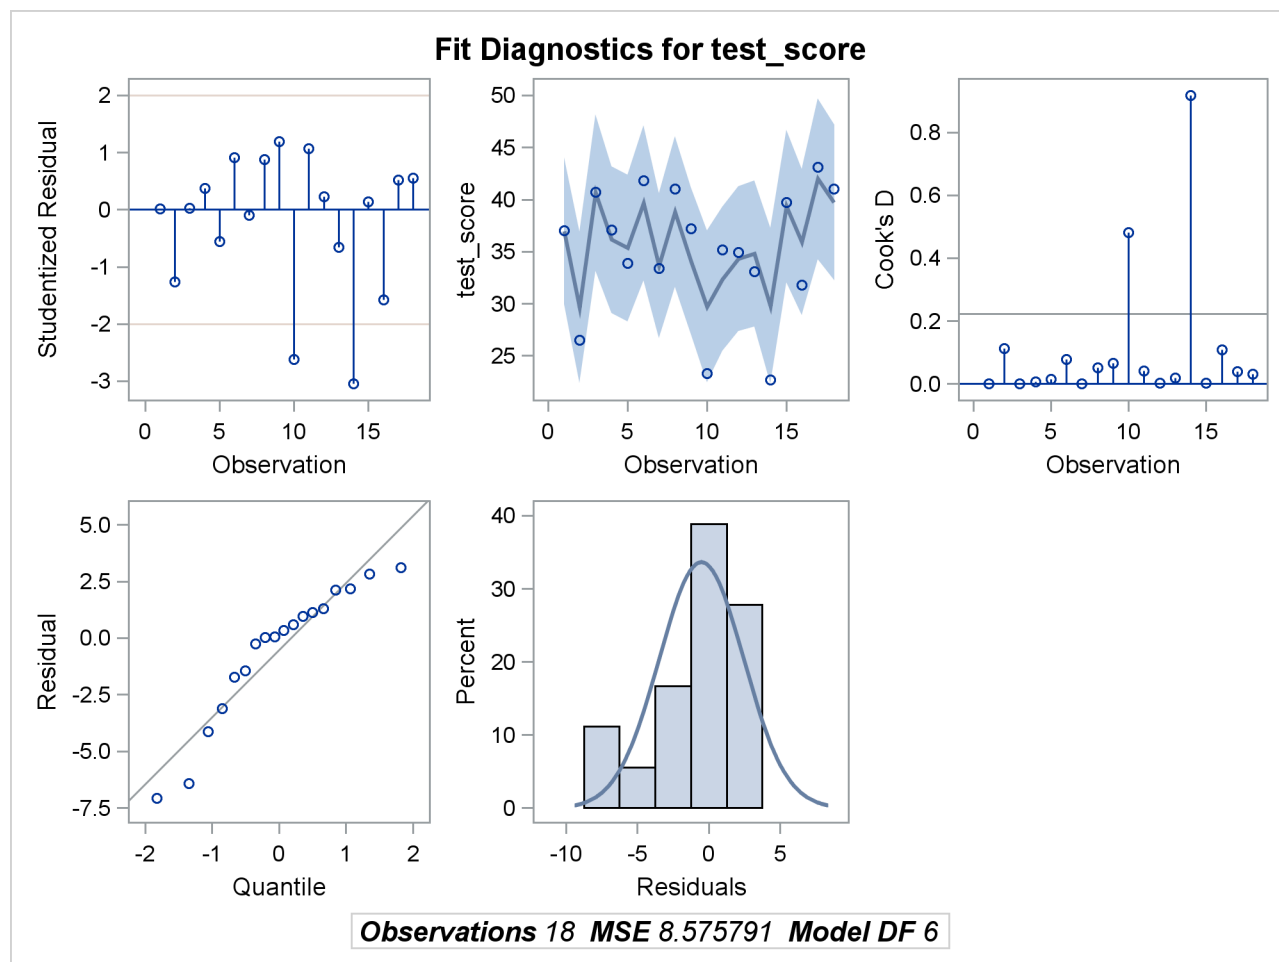
This example illustrates how to use ODS graphics in the ENTROPY procedure. This example is a continuation of the example in the section “[Simple Regression Analysis](#)” on page 692. Graphical displays are

requested by specifying the ODS GRAPHICS statement. For information about the graphics available in the ENTROPY procedure, see the section “ODS Graphics” on page 739.

The following statements show how to generate ODS graphics plots with the ENTROPY procedure. The plots are displayed in [Output 13.5.1](#).

```
proc entropy data=coleman;
  model test_score = teach_sal prcnt_prof socio_stat
    teach_score mom_ed;
run;
```

Output 13.5.1 Model Diagnostics Plots



References

- Coleman, J. S., Campbell, E. Q., Hobson, C. J., McPartland, J., Mood, A. M., Weinfeld, F. D., and York, R. L. (1966), *Equality of Educational Opportunity*, Washington, DC: U.S. Government Printing Office.
- Deaton, A. and Muellbauer, J. (1980), "An Almost Ideal Demand System," *The American Economic Review*, 70, 312–326.
- Golan, A., Judge, G., and Miller, D. (1996), *Maximum Entropy Econometrics: Robust Estimation with Limited Data*, Chichester, England: John Wiley & Sons.
- Golan, A., Judge, G., and Perloff, J. (1996), "A Generalized Maximum Entropy Approach to Recovering Information from Multinomial Response Data," *Journal of the American Statistical Association*, 91, 841–853.
- Golan, A., Judge, G., and Perloff, J. (1997), "Estimation and Inference with Censored and Ordered Multinomial Response Data," *Journal of Econometrics*, 79, 23–51.
- Golan, A., Judge, G., and Perloff, J. (2002), "Comparison of Maximum Entropy and Higher-Order Entropy Estimators," *Journal of Econometrics*, 107, 195–211.
- Good, I. J. (1963), "Maximum Entropy for Hypothesis Formulation, Especially for Multidimensional Contingency Tables," *Annals of Mathematical Statistics*, 34, 911–934.
- Harmon, A. M., Preckel, P., and Eales, J. (1998), *Maximum Entropy-Based Seemingly Unrelated Regression*, Master's thesis, Purdue University.
- Jaynes, E. T. (1957), "Information of Theory and Statistical Mechanics," *Physics Review*, 106, 620–630.
- Jaynes, E. T. (1963), "Information Theory and Statistical Mechanics," in K. W. Ford, ed., *Brandeis Lectures in Theoretical Physics*, volume 3, Statistical Physics, 181–218, New York, Amsterdam: W. A. Benjamin Inc.
- Kapur, J. N. and Kesavan, H. K. (1992), *Entropy Optimization Principles with Applications*, Boston: Academic Press.
- Kullback, J. (1959), *Information Theory and Statistics*, New York: John Wiley & Sons.
- Kullback, J. and Leibler, R. A. (1951), "On Information and Sufficiency," *Annals of Mathematical Statistics*.
- LaMotte, L. R. (1994), "A Note on the Role of Independence in t Statistics Constructed from Linear Statistics in Regression Models," *The American Statistician*, 48, 238–240.
- Miller, D., Eales, J., and Preckel, P. (2003), "Quasi-Maximum Likelihood Estimation with Bounded Symmetric Errors," in *Advances in Econometrics*, volume 17, 133–148, Elsevier.
- Mittelhammer, R. C. and Cardell, S. (2000), "The Data-Constrained GME Estimator of the GLM: Asymptotic Theory and Inference," Working paper of the Department of Statistics, Washington State University, Pullman.
- Mittelhammer, R. C., Judge, G. G., and Miller, D. J. (2000), *Econometric Foundations*, Cambridge: Cambridge University Press.

Myers, R. H. and Montgomery, D. C. (1995), *Response Surface Methodology: Process and Product Optimization Using Designed Experiments*, New York: John Wiley & Sons.

Shannon, C. E. (1948), "A Mathematical Theory of Communication," *Bell System Technical Journal*, 27, 379–423 and 623–656.

Chapter 14

The ESM Procedure

Contents

Overview: ESM Procedure	754
Getting Started: ESM Procedure	754
Syntax: ESM Procedure	756
Functional Summary	756
PROC ESM Statement	758
BY Statement	761
FORECAST Statement	761
ID Statement	763
Details: ESM Procedure	766
Accumulation	767
Missing Value Interpretation	768
Transformations	768
Parameter Estimation	769
Missing Value Modeling Issues	769
Forecasting	769
Inverse Transformations	769
Statistics of Fit	770
Forecast Summation	770
Data Set Output	770
Printed Output	775
ODS Table Names	776
ODS Graphics	776
Examples: ESM Procedure	778
Example 14.1: Forecasting of Time Series Data	778
Example 14.2: Forecasting of Transactional Data	780
Example 14.3: Specifying the Forecasting Model	782
Example 14.4: Extending the Independent Variables for Multivariate Forecasts	782
Example 14.5: Illustration of ODS Graphics	784

Overview: ESM Procedure

The ESM procedure generates forecasts by using exponential smoothing models with optimized smoothing weights for many time series or transactional data.

- For typical time series, you can use the following smoothing models:
 - simple
 - double
 - linear
 - damped trend
 - seasonal
 - Winters method (additive and multiplicative)
- Additionally, transformed versions of these models are provided:
 - log
 - square root
 - logistic
 - Box-Cox

Graphics are available with the ESM procedure. For more information, see the section “[ODS Graphics](#)” on page 776.

The exponential smoothing models supported in PROC ESM differ from those supported in PROC FORECAST since all parameters associated with the forecasting model are optimized by PROC ESM based on the data.

The ESM procedure writes the time series extrapolated by the forecasts, the series summary statistics, the forecasts and confidence limits, the parameter estimates, and the fit statistics to output data sets. The ESM procedure optionally produces printed output for these results by using the Output Delivery System (ODS).

The ESM procedure can forecast both time series data, whose observations are equally spaced by a specific time interval (for example, monthly, weekly), or transactional data, whose observations are not spaced with respect to any particular time interval. Internet, inventory, sales, and similar data are typical examples of transactional data. For transactional data, the data are accumulated based on a specified time interval to form a time series prior to modeling and forecasting.

Getting Started: ESM Procedure

The ESM procedure is simple to use and does not require in-depth knowledge of forecasting methods. It can provide results in output data sets or in other output formats by using the Output Delivery System (ODS).

The following examples are more fully illustrated in “[Example 14.2: Forecasting of Transactional Data](#)” on page 780.

Given an input data set that contains numerous time series variables recorded at a specific frequency, the ESM procedure can forecast the series as follows:

```
proc esm data=<input-data-set> out=<output-data-set>;
  id <time-ID-variable> interval=<frequency>;
  forecast <time-series-variables>;
run;
```

For example, suppose that the input data set SALES contains sales data recorded monthly, the variable that represents time is DATE, and the forecasts are to be recorded in the output data set NEXTYEAR. The ESM procedure could be used as follows:

```
proc esm data=sales out=nextyear;
  id date interval=month;
  forecast _numeric_;
run;
```

The preceding statements generate forecasts for every numeric variable in the input data set SALES for the next twelve months and store these forecasts in the output data set NEXTYEAR. Other output data sets can be specified to store the parameter estimates, forecasts, statistics of fit, and summary data.

By default, PROC ESM generates no printed output. If you want to print the forecasts by using the Output Delivery System (ODS), then you need to add the PRINT=FORECASTS option to the PROC ESM statement, as shown in the following example:

```
proc esm data=sales out=nextyear print=forecasts;
  id date interval=month;
  forecast _numeric_;
run;
```

Other PRINT= options can be specified to print the parameter estimates, statistics of fit, and summary data.

The ESM procedure can forecast both time series data, whose observations are equally spaced by a specific time interval (for example, monthly, weekly), or transactional data, whose observations are not spaced with respect to any particular time interval.

Given an input data set that contains transactional variables not recorded at any specific frequency, the ESM procedure accumulates the data to a specific time interval and forecasts the accumulated series as follows:

```
proc esm data=<input-data-set> out=<output-data-set>;
  id <time-ID-variable> interval=<frequency>
                        accumulate=<accumulation>;
  forecast <time-series-variables> / model=<esm>;
run;
```

For example, suppose that the input data set WEBSITES contains three variables (BOATS, CARS, PLANES) that are Internet data recorded on no particular time interval, and the variable that represents time is TIME, which records the time of the Web hit. The forecasts for the total daily values are to be recorded in the output data set NEXTWEEK. The ESM procedure could be used as follows:

```
proc esm data=websites out=nextweek lead=7;
    id time interval=dtday accumulate=total;
    forecast boats cars planes;
run;
```

The preceding statements accumulate the data into a daily time series, generate forecasts for the BOATS, CARS, and PLANES variables in the input data set (WEBSITES) for the next seven days, and store the forecasts in the output data set (NEXTWEEK). Because the MODEL= option is not specified in the FORECAST statement, a simple exponential smoothing model is fit to each series.

Syntax: ESM Procedure

The following statements are used with the ESM procedure:

```
PROC ESM options ;
    BY variables ;
    ID variable INTERVAL= interval options ;
    FORECAST variable-list / options ;
```

Functional Summary

The statements and options that control the ESM procedure are summarized in the following table.

Table 14.1 Syntax Summary

Description	Statement	Option
Statements		
specify data sets and options	PROC ESM	
specify BY-group processing	BY	
specify variables to forecast	FORECAST	
specify the time ID variable	ID	
Data Set Options		
specify the input data set	PROC ESM	DATA=
specify to output forecasts only	PROC ESM	NOOUTALL
specify the output data set	PROC ESM	OUT=
specify parameter output data set	PROC ESM	OUTEST=

Description	Statement	Option
specify forecast output data set	PROC ESM	OUTFOR=
specify the forecast procedure information output data set	PROC ESM	OUTPROCINFO=
specify statistics output data set	PROC ESM	OUTSTAT=
specify summary output data set	PROC ESM	OUTSUM=
replace actual values held back	FORECAST	REPLACEBACK
replace missing values	FORECAST	REPLACEMISSING
use forecast value to append	FORECAST	USE=
Accumulation and Seasonality Options		
specify accumulation frequency	ID	INTERVAL=
specify length of seasonal cycle	PROC ESM	SEASONALITY=
specify interval alignment	ID	ALIGN=
specify that time ID variable values are not sorted	ID	NOTSORTED
specify starting time ID value	ID	START=
specify ending time ID value	ID	END=
specify accumulation statistic	ID, FORECAST	ACCUMULATE=
specify missing value interpretation	ID, FORECAST	SETMISSING=
specify zero value interpretation	ID, FORECAST	ZEROMISS=
Forecasting Horizon, Holdback Options		
specify data to hold back	PROC ESM	BACK=
specify forecast horizon or lead	PROC ESM	LEAD=
specify horizon to start summation	PROC ESM	STARTSUM=
Forecasting Model Options		
specify confidence limit width	FORECAST	ALPHA=
specify forecast model	FORECAST	MODEL=
specify median forecasts	FORECAST	MEDIAN
specify backcast initialization	FORECAST	NBACKCAST=
specify model transformation	FORECAST	TRANSFORM=
Printing and Plotting Control Options		
specify time ID format	ID	FORMAT=
specify graphical output	PROC ESM	PLOT=
specify printed output	PROC ESM	PRINT=
specify detailed printed output	PROC ESM	PRINTDETAILS
Miscellaneous Options		
specify that analysis variables are processed in sorted order	PROC ESM	SORTNAMES
limit error and warning messages	PROC ESM	MAXERROR=

PROC ESM Statement

PROC ESM *options* ;

The following options can be used in the PROC ESM statement.

BACK=*n*

specifies the number of observations before the end of the data where the multistep forecasts are to begin. The default is BACK=0.

DATA=*SAS-data-set*

names the SAS data set that contains the input data for the procedure to forecast. If the DATA= option is not specified, the most recently created SAS data set is used.

LEAD=*n*

specifies the number of periods ahead to forecast (forecast lead or horizon). The default is LEAD=12.

The LEAD= value is relative to the BACK= option specification and to the last observation in the input data set or the accumulated series, and not to the last nonmissing observation of a particular series. Thus, if a series has missing values at the end, the actual number of forecasts computed for that series is greater than the LEAD= value.

MAXERROR=*number*

limits the number of warning and error messages produced during the execution of the procedure to the specified value. The default is MAXERRORS=50. This option is particularly useful in BY-group processing where it can be used to suppress the recurring messages.

NOOUTALL

specifies that only forecasts are written to the OUT= and OUTFOR= data sets. The NOOUTALL option includes only the final forecast observations in the output data sets; it does not include the one-step forecasts for the data before the forecast period.

The OUT= and OUTFOR= data set will only contain the forecast results starting at the next period following the last observation and ending with the forecast horizon specified by the LEAD= option.

OUT=*SAS-data-set*

names the output data set to contain the forecasts of the variables specified in the subsequent FORECAST statements. If an ID variable is specified, it is also included in the OUT= data set. The values are accumulated based on the ACCUMULATE= option, and forecasts are appended to these values based on the FORECAST statement USE= option. The OUT= data set is particularly useful in extending the independent variables. The OUT= data set can be used as the input data set in a subsequent PROC step to forecast a dependent series by using a regression modeling procedure. If the OUT= option is not specified, a default output data set is created by using the DATA n convention. If you do not want the OUT= data set created, use OUT=_NULL_.

OUTEST=*SAS-data-set*

names the output data set to contain the model parameter estimates and the associated test statistics and probability values. The OUTEST= data set is useful for evaluating the significance of the model parameters and understanding the model dynamics.

OUTFOR=SAS-data-set

names the output data set to contain the forecast time series components (actual, predicted, lower confidence limit, upper confidence limit, prediction error, prediction standard error). The OUTFOR= data set is useful for displaying the forecasts in tabular or graphical form.

OUTPROCINFO=SAS-data-set

names the output data set to contain information in the SAS log, specifically the number of notes, errors, and warnings and the number of series processed, forecasts requested, and forecasts failed.

OUTSTAT=SAS-data-set

names the output data set to contain the statistics of fit (or goodness-of-fit statistics). The OUTSTAT= data set is useful for evaluating how well the model fits the series.

OUTSUM=SAS-data-set

names the output data set to contain the summary statistics and the forecast summation. The summary statistics are based on the accumulated time series when the ACCUMULATE= or SETMISSING= options are specified. The forecast summations are based on the LEAD=, STARTSUM=, and USE= options. The OUTSUM= data set is useful when forecasting large numbers of series and a summary of the results are needed.

PLOT=option | (options)

specifies the graphical output desired. By default, the ESM procedure produces no graphical output. The following plotting options are available:

ACF	plots prediction error autocorrelation function graphics.
ALL	is the same as specifying all of the PLOT= options.
BASIC	equivalent to specifying PLOT=(CORR ERRORS MODELFORECASTS).
CORR	plots the prediction error series graphics panel containing the ACF, IACF, PACF, and white noise probability plots.
ERRORS	plots prediction error time series graphics.
FORECASTS	plots forecast graphics.
FORECASTSONLY	plots the forecast in the forecast horizon only.
IACF	plots prediction error inverse autocorrelation function graphics.
LEVELS	plots smoothed level component graphics.
MODELFORECASTS	plots the one-step ahead model forecast and its confidence bands in the historical period; the forecast and its confidence bands over the forecast horizon.
MODELS	plots model graphics.
PACF	plots prediction error partial autocorrelation function graphics.
PERIODOGRAM	plots prediction error periodogram.
SEASONS	plots smoothed seasonal component graphics.
SPECTRUM	plots periodogram and smoothed periodogram of the prediction error series in a single graph.
TRENDS	plots smoothed trend (slope) component graphics.

WN plots white noise graphics.

For example, PLOT=FORECASTS plots the forecasts for each series. The PLOT= option produces printed output for these results by using the Output Delivery System (ODS).

PRINT=option | (options)

specifies the printed output desired. By default, the ESM procedure produces no printed output. The following printing options are available:

ESTIMATES	prints the results of parameter estimation.
FORECASTS	prints the forecasts.
PERFORMANCE	prints the performance statistics for each forecast.
PERFORMANCE SUMMARY	prints the performance summary for each BY group.
PERFORMANCE OVERALL	prints the performance summary for all of the BY groups.
STATISTICS	prints the statistics of fit.
STATES	prints the backcast, initial, and final states.
SUMMARY	prints the summary statistics for the accumulated time series.
ALL	Same as PRINT=(ESTIMATES FORECASTS STATISTICS SUMMARY).

For example, PRINT=FORECASTS prints the forecasts, PRINT=(ESTIMATES FORECASTS) prints the parameter estimates and the forecasts, and PRINT=ALL prints all of the output.

PRINTDETAILS

specifies that output requested with the PRINT= option be printed in greater detail.

SEASONALITY=number

specifies the length of the seasonal cycle. For example, SEASONALITY=3 means that every group of three observations forms a seasonal cycle. The SEASONALITY= option is applicable only for seasonal forecasting models. By default, the length of the seasonal cycle is one (no seasonality) or the length implied by the INTERVAL= option specified in the ID statement. For example, INTERVAL=MONTH implies that the length of the seasonal cycle is twelve.

SORTNAMES

specifies that the variables specified in the FORECAST statements are processed in sorted order.

STARTSUM=n

specifies the starting forecast lead (or horizon) for which to begin summation of the forecasts specified by the LEAD= option. The STARTSUM= value must be less than the LEAD= value. The default is STARTSUM=1; that is, the sum from the one-step ahead forecast (which is the first forecast in the forecast horizon) to the multistep forecast specified by the LEAD= option.

The prediction standard errors of the summation of forecasts take into account the correlation between the multistep forecasts. The section “[Forecast Summation](#)” on page 770 describes the STARTSUM= option in more detail.

BY Statement

BY *variables* ;

A BY statement can be used with PROC ESM to obtain separate dummy variable definitions for groups of observations defined by the BY variables.

When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the option NOTSORTED or DESCENDING in the BY statement for the ESM procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables by using the DATASETS procedure.

For more information about the BY statement, see *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

FORECAST Statement

FORECAST *variable-list / options* ;

The FORECAST statement lists the numeric variables in the DATA= data set whose accumulated values represent time series to be modeled and forecast. The options specify which forecast model is to be used.

A data set variable can be specified in only one FORECAST statement. Any number of FORECAST statements can be used. The following options can be used with the FORECAST statement.

ACCUMULATE=*option*

specifies how the data set observations are accumulated within each time period for the variables listed in the FORECAST statement. If the ACCUMULATE= option is not specified in the FORECAST statement, accumulation is determined by the ACCUMULATE= option of the ID statement. Use the ACCUMULATE= option with multiple FORECAST statements when you want different accumulation specifications for different variables. See the ID statement [ACCUMULATE=](#) option for more details.

ALPHA=*number*

specifies the significance level to use in computing the confidence limits of the forecast. The ALPHA= value must be between 0 and 1. The default is ALPHA=0.05, which produces 95% confidence intervals.

MEDIAN

specifies that the median forecast values are to be estimated. Forecasts can be based on the mean or median. By default, the mean value is provided. If no transformation is applied to the time series by using the TRANSFORM= option, the mean and median forecast values are identical.

MODEL=*model-name*

specifies the forecasting model to be used to forecast the time series. The default is MODEL=SIMPLE, which performs simple exponential smoothing. The following forecasting models are provided:

NONE	no forecast
SIMPLE	simple (single) exponential smoothing. This is the default.
DOUBLE	double (Brown) exponential smoothing
LINEAR	linear (Holt) exponential smoothing
DAMPTREND	damped trend exponential smoothing
ADDSEASONALISEASONAL	additive seasonal exponential smoothing
MULTSEASONAL	multiplicative seasonal exponential smoothing
WINTERS	Winters multiplicative method
ADDWINTERS	Winters additive method

When the option MODEL=NONE is specified, the time series is appended with missing values in the OUT= data set. This option is useful when the results stored in the OUT= data set are used in a subsequent analysis where forecasts of the independent variables are needed to forecast the dependent variable.

NBACKCAST=*n*

specifies the number of observations used to initialize the backcast states. The default is the entire series.

REPLACEBACK

specifies that actual values excluded by the BACK= option are replaced with one-step-ahead forecasts in the OUT= data set.

REPLACEMISSING

specifies that embedded missing values are replaced with one-step-ahead forecasts in the OUT= data set.

SETMISSING=*option* | *number*

specifies how missing values (either input or accumulated) are assigned in the accumulated time series for variables listed in the FORECAST statement. If the SETMISSING= option is not specified in the FORECAST statement, missing values are set based on the SETMISSING= option of the ID statement. See the ID statement SETMISSING= option for more details.

TRANSFORM=*option*

specifies the time series transformation to be applied to the input or accumulated time series. The following transformations are provided:

NONE	no transformation. This is the default.
LOG	logarithmic transformation
SQRT	square-root transformation
LOGISTIC	logistic transformation
BOXCOX(<i>n</i>)	Box-Cox transformation with parameter number where number is between –5 and 5

When the TRANSFORM= option is specified, the time series must be strictly positive. After the time series is transformed, the model parameters are estimated by using the transformed series. The forecasts of the transformed series are then computed, and finally the transformed series forecasts are inverse transformed. The inverse transform produces either mean or median forecasts depending on whether the MEDIAN option is specified. The sections “[Transformations](#)” on page 768 and “[Inverse Transformations](#)” on page 769 describe this in more detail.

USE=option

specifies which forecast values are appended to the actual values in the OUT= and OUTSUM= data sets. The following USE= options are provided:

PREDICT	The predicted values are appended to the actual values. This option is the default.
LOWER	The lower confidence limit values are appended to the actual values.
UPPER	The upper confidence limit values are appended to the actual values.

Thus, the USE= option enables the OUT= and OUTSUM= data sets to be used for worst-case, best-case, average-case, and median-case decisions.

ZEROMISS=option

specifies how beginning or ending zero values (either input or accumulated) are interpreted in the accumulated time series for variables listed in the FORECAST statement. If the ZEROMISS= option is not specified in the FORECAST statement, beginning or ending zero values are set to missing values based on the ZEROMISS= option of the ID statement. See the ID statement [ZEROMISS=](#) option for more details.

ID Statement

ID *variable* INTERVAL= *interval* < *options* > ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable’s values are assumed to be SAS date or datetime values. In addition, the ID statement specifies the (desired) frequency associated with the time series. The ID statement options also specify how the observations are accumulated and how the time ID values are aligned to form the time series to be forecast. The information specified affects all variables specified in subsequent FORECAST statements. If the ID statement is specified, the INTERVAL= option must be specified. If an ID statement is not specified, the observation number, with respect to the BY group, is used as the time ID. The following options can be used with the ID statement.

ACCUMULATE=option

specifies how the data set observations are accumulated within each time period. The frequency (width of each time interval) is specified by the **INTERVAL=** option. The **ID** variable contains the time ID values. Each time ID variable value corresponds to a specific time period. The accumulated values form the time series, which is used in subsequent model fitting and forecasting.

The **ACCUMULATE=** option is particularly useful when there are gaps in the input data or when there are multiple input observations that coincide with a particular time period (for example, transactional data). The **EXPAND** procedure offers additional frequency conversions and transformations that can also be useful in creating a time series.

The following options determine how the observations are accumulated within each time period based on the **ID** variable and the frequency specified by the **INTERVAL=** option:

NONE	No accumulation occurs; the ID variable values must be equally spaced with respect to the frequency. This is the default option.
TOTAL	Observations are accumulated based on the total sum of their values.
AVERAGE AVG	Observations are accumulated based on the average of their values.
MINIMUM MIN	Observations are accumulated based on the minimum of their values.
MEDIAN MED	Observations are accumulated based on the median of their values.
MAXIMUM MAX	Observations are accumulated based on the maximum of their values.
N	Observations are accumulated based on the number of nonmissing observations.
NMISS	Observations are accumulated based on the number of missing observations.
NOBS	Observations are accumulated based on the number of observations.
FIRST	Observations are accumulated based on the first of their values.
LAST	Observations are accumulated based on the last of their values.
STDDEV STD	Observations are accumulated based on the standard deviation of their values.
CSS	Observations are accumulated based on the corrected sum of squares of their values.
USS	Observations are accumulated based on the uncorrected sum of squares of their values.

If the **ACCUMULATE=** option is specified, the **SETMISSING=** option is useful for specifying how accumulated missing values are treated. If missing values should be interpreted as zero, then **SETMISSING=0** should be used. The section “[Accumulation](#)” on page 767 describes accumulation in greater detail.

ALIGN=option

controls the alignment of SAS dates used to identify output observations. The **ALIGN=** option accepts the following values: **BEGINNING** | **BEG** | **B**, **MIDDLE** | **MID** | **M**, and **ENDING** | **END** | **E**. **BEGINNING** is the default.

END=*date | datetime*

specifies a SAS date or datetime literal value that represents the end of the data. If the last time ID variable value is less than the END= value, the series is extended with missing values. If the last time ID variable value is greater than the END= value, the series is truncated. For example, **END='1jan2008'**D specifies that data for time periods after the first of January 2008 not be used. The option **END="&sysdate"**D uses the automatic macro variable SYSDATE to extend or truncate the series to the current date. This option and the START= option can be used to ensure that data associated with each BY group contains the same number of observations.

FORMAT=*format*

specifies the SAS format for the time ID values. If the FORMAT= option is not specified, the default format is implied from the INTERVAL= option.

INTERVAL=*interval*

specifies the frequency of the input time series or for the time series to be accumulated from the input data. For example, if the input data set consists of quarterly observations, then INTERVAL=QTR should be used. If the SEASONALITY= option is not specified, the length of the seasonal cycle is implied by the INTERVAL= option. For example, INTERVAL=QTR implies a seasonal cycle of length 4. If the ACCUMULATE= option is also specified, the INTERVAL= option determines the time periods for the accumulation of observations.

The basic intervals are YEAR, SEMIYEAR, QTR, MONTH, SEMIMONTH, TENDAY, WEEK, WEEKDAY, DAY, HOUR, MINUTE, SECOND. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about the intervals that can be specified.

NOTSORTED

specifies that the time ID values are not in sorted order. The ESM procedure sorts the data with respect to the time ID prior to analysis.

SETMISSING=*option | number*

specifies how missing values (either input or accumulated) are assigned in the accumulated time series. If a number is specified, missing values are set to that number. If a missing value on the input data set indicates an unknown value, the SETMISSING= option should not be used. If a missing value indicates no value, SETMISSING=0 should be used. You typically use SETMISSING=0 for transactional data, because no recorded data usually implies no activity. The following options can also be used to determine how missing values are assigned:

MISSING	Missing values are set to missing. This is the default option.
AVERAGE AVG	Missing values are set to the accumulated average value.
MINIMUM MIN	Missing values are set to the accumulated minimum value.
MEDIAN MED	Missing values are set to the accumulated median value.
MAXIMUM MAX	Missing values are set to the accumulated maximum value.
FIRST	Missing values are set to the accumulated first nonmissing value.
LAST	Missing values are set to the accumulated last nonmissing value.
PREVIOUS PREV	Missing values are set to the previous accumulated nonmissing value. Missing values at the beginning of the accumulated series remain missing.

NEXT Missing values are set to the next accumulated nonmissing value. Missing values at the end of the accumulated series remain missing.

If **SETMISSING=MISSING** is specified, the missing observations are replaced with predicted values computed from the exponential smoothing model.

START=*date | datetime*

specifies a SAS date or datetime literal value that represents the beginning of the data. If the first time ID variable value is greater than the **START=** value, the series is prefixed with missing values. If the first time ID variable value is less than the **START=** value, the series is truncated. This option and the **END=** option can be used to ensure that data associated with each BY group contains the same number of observations.

ZEROMISS=*option*

specifies how beginning and/or ending zero values (either input or accumulated) are interpreted in the accumulated time series. The following values can be specified for the **ZEROMISS=** option:

NONE	Beginning and/or ending zeros are unchanged. This is the default.
LEFT	Beginning zeros are set to missing.
RIGHT	Ending zeros are set to missing.
BOTH	Both beginning and ending zeros are set to missing.

If the accumulated series is all missing and/or zero the series is not changed.

Details: ESM Procedure

The ESM procedure can be used to forecast time series data as well as transactional data. If the data is transactional, then the procedure must first accumulate the data into a time series before it can be forecast. The procedure uses the following sequential steps to produce forecasts, with the options that control the step listed to the right:

Table 14.2 ESM Processing Steps and Control Options

Step	Operation	Option	Statement
1	accumulation	ACCUMULATE=	ID
2	missing value interpretation	SETMISSING=	ID, FORECAST
3	transformations	TRANSFORM=	FORECAST
4	parameter estimation	MODEL=	FORECAST
5	forecasting	MODEL=, LEAD=	FORECAST, PROC ESM
6	inverse transformation	TRANSFORM, MEDIAN	FORECAST
7	summation of forecasts	LEAD=, STARTSUM=	PROC ESM

Each of the steps shown in Table 14.2 is described in the following sections.

Accumulation

If the `ACCUMULATE=` option is specified in the `ID` statement, data set observations are accumulated within each time period. The frequency (width of each time interval) is specified by the `INTERVAL=` option, and the `ID` variable contains the time `ID` values. Each time `ID` value corresponds to a specific time period. Accumulation is particularly useful when the input data set contains transactional data, whose observations are not spaced with respect to any particular time interval. The accumulated values form the time series that is used in subsequent analyses by the `ESM` procedure.

For example, suppose a data set contains the following observations:

19MAR1999	10
19MAR1999	30
11MAY1999	50
12MAY1999	20
23MAY1999	20

If the `INTERVAL=MONTH` option is specified on the `ID` statement, all of the preceding observations fall within three time periods: March 1999, April 1999, and May 1999. The observations are accumulated within each time period as follows.

If the `ACCUMULATE=NONE` option is specified, an error is generated because the `ID` variable values are not equally spaced with respect to the specified frequency (`MONTH`).

If the `ACCUMULATE=TOTAL` option is specified, the resulting time series is:

01MAR1999	40
01APR1999	.
01MAY1999	90

If the `ACCUMULATE=AVERAGE` option is specified, the resulting time series is:

01MAR1999	20
01APR1999	.
01MAY1999	30

If the `ACCUMULATE=MINIMUM` option is specified, the resulting time series is:

01MAR1999	10
01APR1999	.
01MAY1999	20

If the `ACCUMULATE=MEDIAN` option is specified, the resulting time series is:

01MAR1999	20
01APR1999	.
01MAY1999	20

If the ACCUMULATE=MAXIMUM option is specified, the resulting time series is:

```
O1MAR1999    30
O1APR1999    .
O1MAY1999    50
```

If the ACCUMULATE=FIRST option is specified, the resulting time series is:

```
O1MAR1999    10
O1APR1999    .
O1MAY1999    50
```

If the ACCUMULATE=LAST option is specified, the resulting time series is:

```
O1MAR1999    30
O1APR1999    .
O1MAY1999    20
```

If the ACCUMULATE=STDDEV option is specified, the resulting time series is:

```
O1MAR1999    14.14
O1APR1999    .
O1MAY1999    17.32
```

As can be seen from the preceding examples, even though the data set observations contained no missing values, the accumulated time series can have missing values.

Missing Value Interpretation

Sometimes missing values should be interpreted as truly unknown values and retained as missing values in the data set. The forecasting models used by the ESM procedure can effectively handle missing values (see the section “[Missing Value Modeling Issues](#)” on page 769). However, sometimes missing values are known, such as when missing values are created from accumulation and represent no observed values for the variable. In this case, the value for the period should be interpreted as zero (no values), and the SETMISSING=0 option should be used to cause PROC ESM to recode missing values as zero. In other cases, missing values should be interpreted as global values, such as minimum or maximum values of the accumulated series. The accumulated and missing-value-recoded time series is used in subsequent analyses in PROC ESM.

Transformations

If the TRANSFORM= option is specified in the FORECAST statement, the time series is transformed prior to model parameter estimation and forecasting. Only strictly positive series can be transformed. An error is

generated when the TRANSFORM= option is used with a nonpositive series. (See Chapter 50, “[Forecasting Process Details](#),” for more details about forecasting transformed time series.)

Parameter Estimation

All the parameters (smoothing weights) associated with the exponential smoothing model used to forecast the time series (as specified by the MODEL= option) are optimized based on the data, with the default parameter restrictions imposed. If the TRANSFORM= option is specified, the transformed time series data are used to estimate the model parameters.

The techniques used in the ESM procedure are identical to those used for exponential smoothing models in the Time Series Forecasting System of SAS/ETS software. See Chapter 42, “[Overview of the Time Series Forecasting System](#),” for more information.

Missing Value Modeling Issues

The treatment of missing values varies with the forecasting model. Missing values after the start of the series are replaced with one-step-ahead predicted values, and the predicted values are used in the smoothing equations.

The treatment of missing values can also be specified with the SETMISSING= option, which changes the missing values prior to modeling.

NOTE: Even if all of the observed data are nonmissing, the ACCUMULATE= option can create missing values in the accumulated series (when the data contain no observations for some of the time periods specified by the INTERVAL= option).

Forecasting

Once the model parameters are estimated, one-step-ahead forecasts are generated for the full range of the accumulated and optionally transformed time series data, and multistep forecasts are generated from the end of the time series to the future time period specified by the LEAD= option. If there are missing values at the end of the time series, the forecast horizon will be greater than that specified by the LEAD= option.

Inverse Transformations

If the TRANSFORM= option is specified in the FORECAST statement, the forecasts of the transformed time series are inverse transformed. By default, forecasts of the mean (expected value) are generated. If

the MEDIAN option is specified, median forecasts are generated. (See Chapter 50, “Forecasting Process Details,” for more details about forecasting transformed time series.)

Statistics of Fit

The statistics of fit are computed by comparing the time series data (after accumulation and missing value recoding, if specified) with the generated forecasts. If the TRANSFORM= option is specified, the statistics of fit are based on the inverse transformed forecasts. (See Chapter 50, “Forecasting Process Details,” for more details about statistics of fit for forecasting models.)

Forecast Summation

The multistep forecasts generated by the preceding steps can optionally be summed from the STARTSUM= value to the LEAD= value. For example, if the options STARTSUM=4 and LEAD=6 are specified on the PROC ESM statement, the four-step through six-step ahead forecasts are summed.

The forecasts are simply summed; however, the prediction error variance of this sum is computed by taking into account the correlation between the individual predictions. (These variance-related computations are performed only when no transformation is specified; that is, when TRANSFORM=NONE.) The upper and lower confidence limits for the sum of the predictions is then computed based on the prediction error variance of the sum.

The forecast summation is particularly useful when it is desirable to model in one frequency but the forecast of interest is another frequency. For example, if a time series has a monthly frequency (INTERVAL=MONTH) and you want a forecast for the third and fourth future months, a forecast summation for the third and fourth month can be obtained by specifying STARTSUM=3 and LEAD=4.

Data Set Output

The ESM procedure can create the OUT=, OUTEST=, OUTFOR=, OUTSTAT=, and OUTSUM= data sets. These data sets contain the variables listed in the BY statement and statistics related to the variables listing in the FORECAST statement. In general, if a forecasting step related to an output data set fails, the values of this step are not recorded or are set to missing in the related output data set and appropriate error and/or warning messages are recorded in the log.

OUT= Data Set

The OUT= data set contains the variables specified in the BY, ID, and FORECAST statements. If the ID statement is specified, the ID variable values are aligned and extended based on the ALIGN= and INTERVAL= options. The values of the variables specified in the FORECAST statements are accumulated

based on the ACCUMULATE= option, and missing values are interpreted based on the SETMISSING= option. If the REPLACEMISSING option is specified, embedded missing values are replaced by the one-step-ahead predicted values.

These FORECAST variables are then extrapolated based on the forecasts from the fitted models, or extended with missing values when the MODEL=NONE option is specified. If USE=LOWER is specified, the variable is extrapolated with the lower confidence limits; if USE=UPPER, the variable is extrapolated using the upper confidence limits; otherwise, the variable values are extrapolated with the predicted values. If the TRANSFORM= option is specified, the predicted values contain either mean or median forecasts depending on whether or not the MEDIAN option is specified.

If any of the forecasting steps fail for a particular variable, the variable is extended by missing values.

OUTEST= Data Set

The OUTEST= data set contains the variables specified in the BY statement as well as the variables listed below. For variables listed in FORECAST statements where the option MODEL=NONE is specified, no observations are recorded in the OUTEST= data set. For variables listed in FORECAST statements where the option MODEL=NONE is not specified, the following variables in the OUTEST= data set contain observations related to the parameter estimation step:

<code>_NAME_</code>	variable name
<code>_MODEL_</code>	forecasting model
<code>_TRANSFORM_</code>	transformation
<code>_PARAM_</code>	parameter name
<code>_EST_</code>	parameter estimate
<code>_STDERR_</code>	standard errors
<code>_TVALUE_</code>	<i>t</i> values
<code>_PVALUE_</code>	probability values

If the parameter estimation step fails for a particular variable, no observations are output to the OUTEST= data set for that variable.

OUTFOR= Data Set

The OUTFOR= data set contains the variables specified in the BY statement as well as the variables listed below. For variables listed in FORECAST statements where the option MODEL=NONE is specified, no observations are recorded in the OUTFOR= data set for these variables. For variables listed in FORECAST statements where the option MODEL=NONE is not specified, the following variables in the OUTFOR= data set contain observations related to the forecasting step:

<code>_NAME_</code>	variable name
<code>_TIMEID_</code>	time ID values
<code>ACTUAL</code>	actual values

PREDICT	predicted values
STD	prediction standard errors
LOWER	lower confidence limits
UPPER	upper confidence limits
ERROR	prediction errors

If the forecasting step fails for a particular variable, no observations are recorded in the OUTFOR= data set for that variable. If the TRANSFORM= option is specified, the values in the preceding variables are the inverse transform forecasts. If the MEDIAN option is specified, the median forecasts are stored; otherwise, the mean forecasts are stored.

OUTPROCINFO= Data Set

The OUTPROCINFO= data set contains information about the run of the ESM procedure. The following variables are present:

SOURCE	set to the name of the procedure, in this case ESM
NAME	name of an item being reported; can be the number of errors, notes, or warnings, number of forecasts requested, and so on
LABEL	descriptive label for the item in _NAME_
STAGE	set to the current stage of the procedure, for ESM this is set to ALL
VALUE	value of the item specified in _NAME_

OUTSTAT= Data Set

The OUTSTAT= data set contains the variables specified in the BY statement as well as the variables listed below. For variables listed in FORECAST statements where the option MODEL=NONE is specified, no observations are recorded for these variables in the OUTSTAT= data set. For variables listed in FORECAST statements where the option MODEL=NONE is not specified, the following variables in the OUTSTAT= data set contain observations related to the statistics of fit:

NAME	variable name
REGION	the region in which the statistics are calculated. Statistics calculated in the fit region are indicated by FIT. Statistics calculated in the forecast region, which happens only if the BACK= option is greater than zero, are indicated by FORECAST.
DFE	degrees of freedom error
N	number of observations
NOBS	number of observations used
NMISSA	number of missing actuals
NMISSP	number of missing predicted values

NPARMS	number of parameters
TSS	total sum of squares
SST	corrected total sum of squares
SSE	sum of square error
MSE	mean square error
UMSE	unbiased mean square error
RMSE	root mean square error
URMSE	unbiased root mean square error
MAPE	mean absolute percent error
MAE	mean absolute error
MASE	mean absolute scaled error
RSQUARE	R square
ADJRSQ	adjusted R square
AADJRSQ	Amemiya's adjusted R square
RWRSQ	random walk R square
AIC	Akaike information criterion
AICC	finite sample corrected AIC
SBC	Schwarz Bayesian information criterion
APC	Amemiya's prediction criterion
MAXERR	maximum error
MINERR	minimum error
MINPE	minimum percent error
MAXPE	maximum percent error
ME	mean error
MPE	mean percent error
MDAPE	median absolute percent error
GMAPE	geometric mean absolute percent error
MINPPE	minimum predictive percent error
MAXPPE	maximum predictive percent error
MSPPE	mean predictive percent error
MAPPE	symmetric mean absolute predictive percent error
MDAPPE	median absolute predictive percent error
GMAPPE	geometric mean absolute predictive percent error
MINSPE	minimum symmetric percent error
MAXSPE	maximum symmetric percent error

MSPE	mean symmetric percent error
SMAPE	symmetric mean absolute percent error
MDASPE	median absolute symmetric percent error
GMASPE	geometric mean absolute symmetric percent error
MINRE	minimum relative error
MAXRE	maximum relative error
MRE	mean relative error
MRAE	mean relative absolute error
MDRAE	median relative absolute error
GMRAE	geometric mean relative absolute error
MINAPES	minimum absolute error percent of standard deviation
MAXAPES	maximum absolute error percent of standard deviation
MAPES	mean absolute error percent of standard deviation
MDAPES	median absolute error percent of standard deviation
GMAPES	geometric mean absolute error percent of standard deviation

If the statistics of fit cannot be computed for a particular variable, no observations are recorded in the OUTSTAT= data set for that variable. If the TRANSFORM= option is specified, the values in the preceding variables are computed based on the inverse transform forecasts. If the MEDIAN option is specified, the median forecasts are the basis; otherwise, the mean forecasts are the basis.

See Chapter 50, “[Forecasting Process Details](#),” for more information about the calculation of forecasting statistics of fit.

OUTSUM= Data Set

The OUTSUM= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTSUM= data set records the summary statistics for each variable specified in a FORECAST statement. For variables listed in FORECAST statements where the option MODEL=NONE is specified, the values related to forecasts are set to missing for those variables in the OUTSUM= data set. For variables listed in FORECAST statements where the option MODEL=NONE is not specified, the forecast values are set based on the USE= option.

The following variables related to summary statistics are based on the ACCUMULATE= and SETMISSING= options:

NAME	variable name
STATUS	forecasting status. Nonzero values imply that no forecast was generated for the series.
NOBS	number of observations
N	number of nonmissing observations
NMISS	number of missing observations

MIN	minimum value
MAX	maximum value
MEAN	mean value
STDDEV	standard deviation

The following variables related to forecast summation are based on the LEAD= and STARTSUM= options:

PREDICT	forecast summation predicted values
STD	forecast summation prediction standard errors
LOWER	forecast summation lower confidence limits
UPPER	forecast summation upper confidence limits

Variance-related computations are computed only when no transformation is specified (TRANSFORM=NONE).

The following variables related to multistep forecast are based on the LEAD= and USE= options:

<u>LEAD</u> <i>n</i>	multistep forecast (<i>n</i> ranges from one to the value of the LEAD= option). If USE=LOWER, this variable contains the lower confidence limits; if USE=UPPER, this variable contains the upper confidence limits; otherwise, this variable contains the predicted values.
----------------------	--

If the forecast step fails for a particular variable, the variables that are related to forecasting are set to missing for that variable. The OUTSUM= data set contains both a summary of the (accumulated) time series and optionally its forecasts for all series.

Printed Output

The ESM procedure optionally produces printed output by using the Output Delivery System (ODS). By default, the procedure produces no printed output. All output is controlled by the PRINT= and PRINTDEXTAILS options in the PROC ESM statement. In general, if a forecasting step that is related to printed output fails, the values of this step are not printed and appropriate error or warning messages are recorded in the log. The printed output is similar to the output data sets.

The printed output produced by the PRINT= option values is described as follows:

SUMMARY	prints the summary statistics and forecast summaries similar to the OUTSUM= data set.
ESTIMATES	prints the parameter estimates similar to the OUTEST= data set.
FORECASTS	prints the forecasts similar to the OUTFOR= data set.
PERFORMANCE	prints the performance statistics.
PERFORMANCESUMMARY	prints the performance summary for each BY group.
PERFORMANCEOVERALL	prints the performance summary for all BY groups.
STATES	prints the backcast, initial, and final smoothed states.

STATISTICS prints the statistics of fit similar to the OUTSTAT= data set.

The PRINTDETAILS option is the opposite of the NOOUTALL option. Specifically, if PRINT=FORECASTS and the PRINTDETAILS options are specified in the PROC ESM statement, the one-step-ahead forecasts through the range of the data are printed in addition to the information related to a specific forecasting model, such as the smoothing states. If the PRINTDETAILS option is not specified, only the multistep forecasts are printed.

ODS Table Names

Table 14.3 relates the PRINT= options to ODS tables:

Table 14.3 ODS Tables Produced in PROC ESM

ODS Table Name	Description	PRINT= Option
DescStats	descriptive statistics	SUMMARY
ForecastSummary	forecast summary	SUMMARY
ForecastSummation	forecast summation	SUMMARY
ParameterEstimates	parameter estimates	ESTIMATES
Forecasts	forecasts	FORECASTS
Performance	performance statistics	PERFORMANCE
PerformanceSummary	performance summary	PERFORMANCESUMMARY
PerformanceOverall	performance overall	PERFORMANCEOVERALL
SmoothedStates	smoothed states	STATES
FitStatistics	evaluation statistics of fit	STATISTICS
PerformanceStatistics	performance (out-of-sample) statistics of fit	STATISTICS

The ODS table “ForecastSummary” is related to all time series within a BY group. The other tables are related to a single series within a BY group.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the ESM procedure. To request these graphs you must specify the PLOT= option in the PROC ESM statement.

ODS Graph Names

PROC ESM assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when using ODS. The names are listed in [Table 14.4](#).

Table 14.4 ODS Graphics Produced by the PLOT= Option in PROC ESM

ODS Graph Name	Plot Description	PLOT= Option
ErrorACFNORMPlot	standardized autocorrelation of prediction errors	ACF
ErrorACFPlot	autocorrelation of prediction errors	ACF
ErrorHistogram	prediction error histogram	ERRORS
ErrorCorrelationPlots	prediction error plot panel	CORR
ErrorIACFNORMPlot	standardized inverse autocorrelation of prediction errors	IACF
ErrorIACFPlot	inverse autocorrelation of prediction errors	IACF
ErrorPACFNORMPlot	standardized partial autocorrelation of prediction errors	PACF
ErrorPACFPlot	partial autocorrelation of prediction errors	PACF
ErrorPeriodogramPlot	periodogram of prediction errors	PERIODOGRAM
ErrorPlot	plot of prediction errors	ERRORS
ErrorSpectralDensityPlot	combined periodogram and spectral density estimate plot	SPECTRUM
ErrorWhiteNoiseLogProbPlot	white noise log probability plot of prediction errors	WN
ErrorWhiteNoiseProbPlot	white noise probability plot of prediction errors	WN
ForecastsOnlyPlot	forecasts only plot	FORECASTSONLY
ForecastsPlot	forecasts plot	FORECASTS
LevelStatePlot	smoothed level state plot	LEVELS
ModelForecastsPlot	model and forecasts plot	MODELFORECASTS
ModelPlot	model plot	MODELS
SeasonStatePlot	smoothed season state plot	SEASONS
TrendStatePlot	smoothed trend state plot	TRENDS

Examples: ESM Procedure

Example 14.1: Forecasting of Time Series Data

This example uses retail sales data to illustrate how the ESM procedure can be used to forecast time series data.

The following DATA step creates a data set from data recorded monthly at numerous points of sale. The data set, SALES, contains a variable DATE that represents time and a variable for each sales item. Each value of the DATE variable is recorded in ascending order, and the values of each of the other variables represent a single time series:

```
data sales;
    format date date9.;
    input date : date9. shoes socks laces dresses
          coats shirts ties belts hats blouses;
datalines;

    ... more lines ...
```

The following ESM procedure statements forecast each of the monthly time series:

```
proc esm data=sales out=nextyear;
    id date interval=month;
    forecast _numeric_;
run;
```

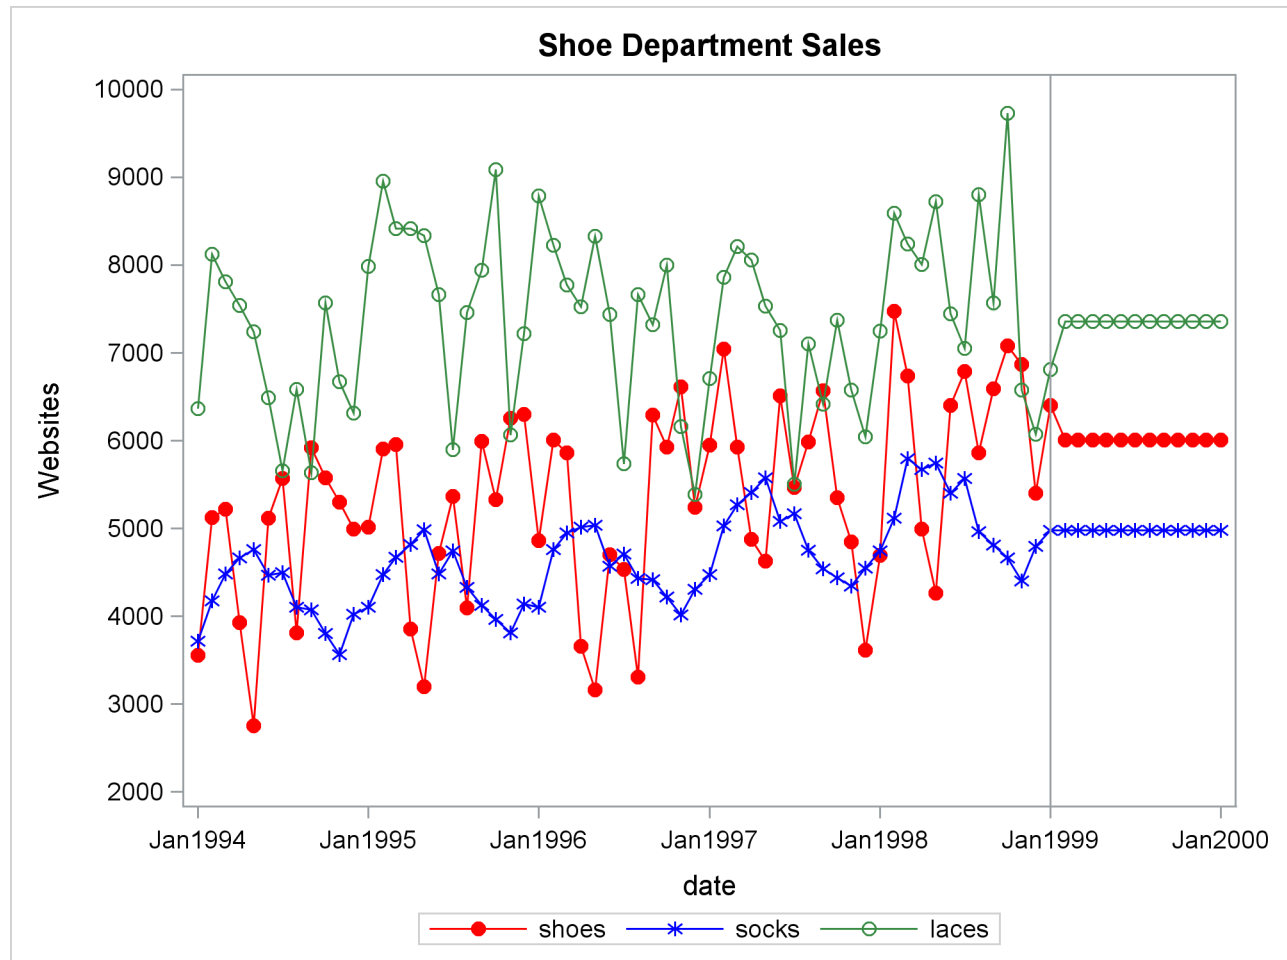
The preceding statements generate forecasts for every numeric variable in the input data set SALES for the next twelve months and store these forecasts in the output data set NEXTYEAR.

The following statements plot the forecasts:

```
title1 "Shoe Department Sales";
proc sgplot data=nextyear;
    series x=date y=shoes / markers
          markerattrs=(symbol=circlefilled color=red)
          lineattrs=(color=red);
    series x=date y=socks / markers
          markerattrs=(symbol=asterisk color=blue)
          lineattrs=(color=blue);
    series x=date y=laces / markers
          markerattrs=(symbol=circle color=styg)
          lineattrs=(color=styg);
    refline '01JAN1999'd / axis=x;
    xaxis values=('01JAN1994'd to '01DEC2000'd by year);
    yaxis values=(2000 to 10000 by 1000) minor label='Websites';
run;
```

The plots are shown in [Output 14.1.1](#). The historical data is shown to the left of the reference line and the forecasts for the next twelve monthly periods is shown to the right.

Output 14.1.1 Retail Sales Forecast Plots



The default simple exponential smoothing model is used because the `MODEL=` option is omitted on the `FORECAST` statement. Note that for simple exponential smoothing the forecasts are constant.

The following ESM procedure statements are identical to the preceding statements except that the `PRINT=FORECASTS` option is specified:

```
proc esm data=sales out=nextyear print=forecasts;
  id date interval=month;
  forecast _numeric_;
run;
```

In addition to forecasting each of the monthly time series, the preceding statements print the forecasts by using the Output Delivery System (ODS); the forecasts are partially shown in [Output 14.1.2](#). This output shows the predictions, prediction standard errors, and the upper and lower confidence limits for the next twelve monthly periods.

Output 14.1.2 Forecast Tables

Shoe Department Sales					
The ESM Procedure					
Forecasts for Variable shoes					
Obs	Time	Forecasts	Standard Error	95% Confidence Limits	
62	FEB1999	6009.1986	1069.4059	3913.2016	8105.1956
63	MAR1999	6009.1986	1075.7846	3900.6996	8117.6976
64	APR1999	6009.1986	1082.1257	3888.2713	8130.1259
65	MAY1999	6009.1986	1088.4298	3875.9154	8142.4818
66	JUN1999	6009.1986	1094.6976	3863.6306	8154.7666
67	JUL1999	6009.1986	1100.9298	3851.4158	8166.9814
68	AUG1999	6009.1986	1107.1269	3839.2698	8179.1274
69	SEP1999	6009.1986	1113.2895	3827.1914	8191.2058
70	OCT1999	6009.1986	1119.4181	3815.1794	8203.2178
71	NOV1999	6009.1986	1125.5134	3803.2329	8215.1643
72	DEC1999	6009.1986	1131.5758	3791.3507	8227.0465
73	JAN2000	6009.1986	1137.6060	3779.5318	8238.8654

Example 14.2: Forecasting of Transactional Data

This example illustrates how the ESM procedure can be used to forecast transactional data.

The following DATA step creates a data set from data recorded at several Internet Web sites. The data set WEBSITES contains a variable TIME that represents time and the variables ENGINE, BOATS, CARS, and PLANES that represent Internet Web site data. Each value of the TIME variable is recorded in ascending order, and the values of each of the other variables represent a transactional data series.

The following ESM procedure statements forecast each of the transactional data series:

```
proc esm data=websites out=nextweek lead=7;
  id time interval=dtday accumulate=total;
  forecast boats cars planes;
run;
```

The preceding statements accumulate the data into a daily time series, generate forecasts for the BOATS, CARS, and PLANES variables in the input data set WEBSITES for the next week, and the forecasts are stored in the OUT= data set NEXTWEEK.

The following statements plot the forecasts related to the Internet data:

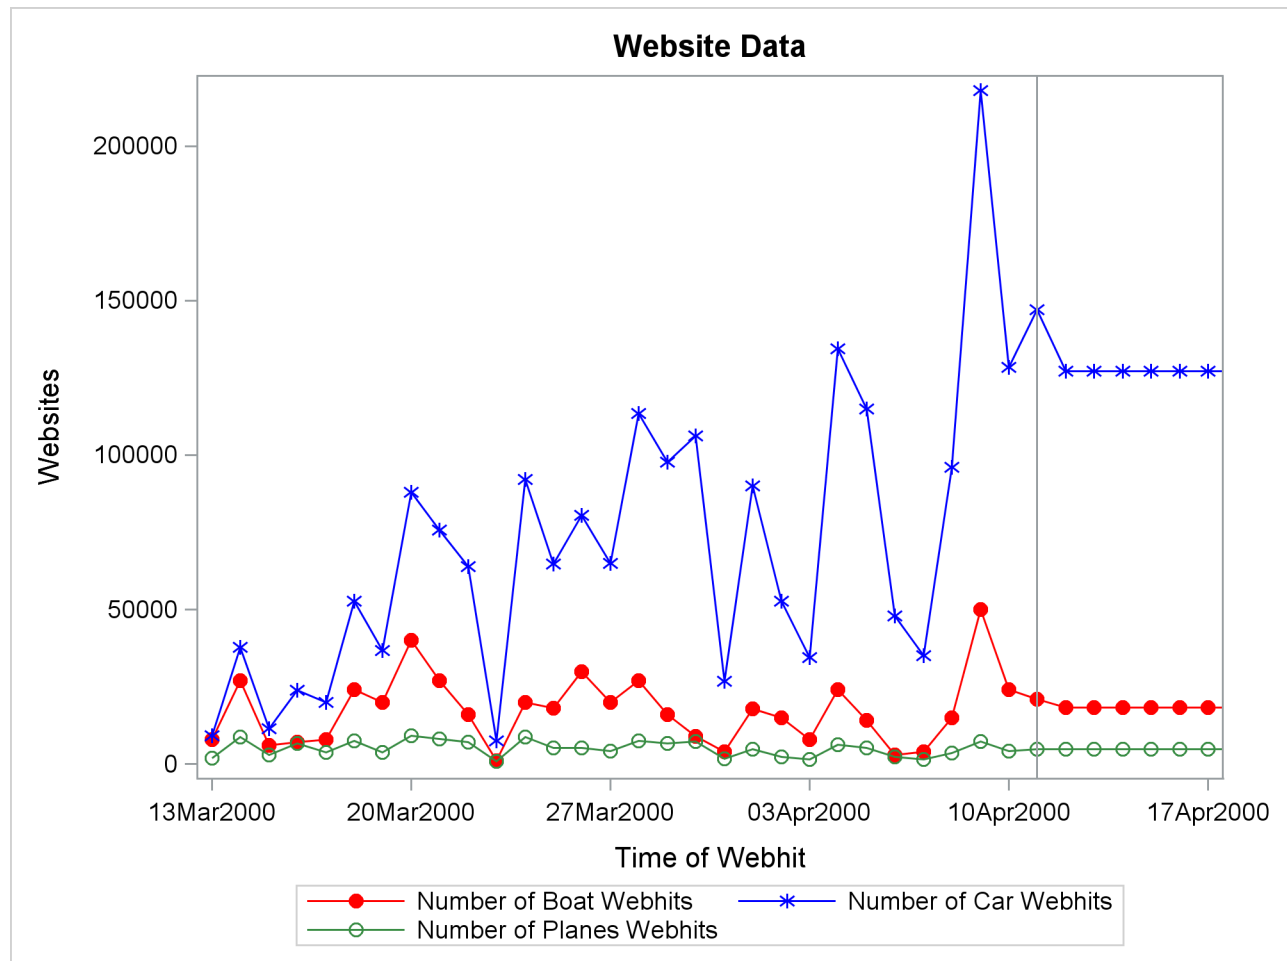
```

title1 "Website Data";
proc sgplot data=nextweek;
  series x=time y=boats / markers
          markerattrs=(symbol=circlefilled color=red)
          lineattrs=(color=red);
  series x=time y=cars / markers
          markerattrs=(symbol=asterisk color=blue)
          lineattrs=(color=blue);
  series x=time y=planes / markers
          markerattrs=(symbol=circle color=styg)
          lineattrs=(color=styg);
  refline '11APR2000:00:00:00'dt / axis=x;
  xaxis values=('13MAR2000:00:00:00'dt to '18APR2000:00:00:00'dt by dtweek);
  yaxis label='Websites' minor;
run;

```

The plots are shown in [Output 14.2.1](#). The historical data is shown to the left of the reference line and the forecasts for the next seven days are shown to the right.

Output 14.2.1 Internet Data Forecast Plots



Example 14.3: Specifying the Forecasting Model

This example illustrates how the ESM procedure can be used to specify different models for different series. Internet data from the previous example are used for this illustration.

This example, forecasts the BOATS variable by using the seasonal exponential smoothing model (SEASONAL), the CARS variable by using the Winters (multiplicative) model (MULTWINTERS), and the PLANES variable by using the Log Winters (additive) model. The following ESM procedure statements forecast each of the transactional data series based on these requirements:

```
proc esm data=websites out=nextweek lead=7;
  id time interval=dtday accumulate=total;
  forecast boats / model=seasonal;
  forecast cars / model=multwinters;
  forecast planes / model=addwinters transform=log;
run;
```

Example 14.4: Extending the Independent Variables for Multivariate Forecasts

In the previous example, the ESM procedure was used to forecast several transactional series variables by using univariate models. This example illustrates how the ESM procedure can be used to extend the independent variables that are associated with a multiple regression forecasting problem.

This example accumulates and forecasts the BOATS, CARS, and PLANES variables that were illustrated in the previous example. In addition, this example accumulates the ENGINES variable to form a time series that is then extended with missing values within the forecast horizon with the specification of MODEL=NONE.

```
proc esm data=websites out=nextweek lead=7;
  id time interval=dtday accumulate=total;
  forecast engines / model=none;
  forecast boats / model=seasonal;
  forecast cars / model=multwinters;
  forecast planes / model=addwinters transform=log;
run;
```

The following AUTOREG procedure statements are used to forecast the ENGINES variable by regressing on the independent variables (BOATS, CARS, and PLANES).

```
proc autoreg data= nextweek;
  model engines = boats cars planes / noprint;
  output out=enginehits p=predicted;
run;
```


The NEXTWEEK data set created by PROC ESM is used as an input data set to PROC AUTOREG. The output data set from PROC AUTOREG contains the forecast of the variable ENGINES based on the regression model with the variables BOATS, CARS, and PLANES as regressors. See Chapter 8, “[The AUTOREG Procedure](#),” for details about autoregression models.

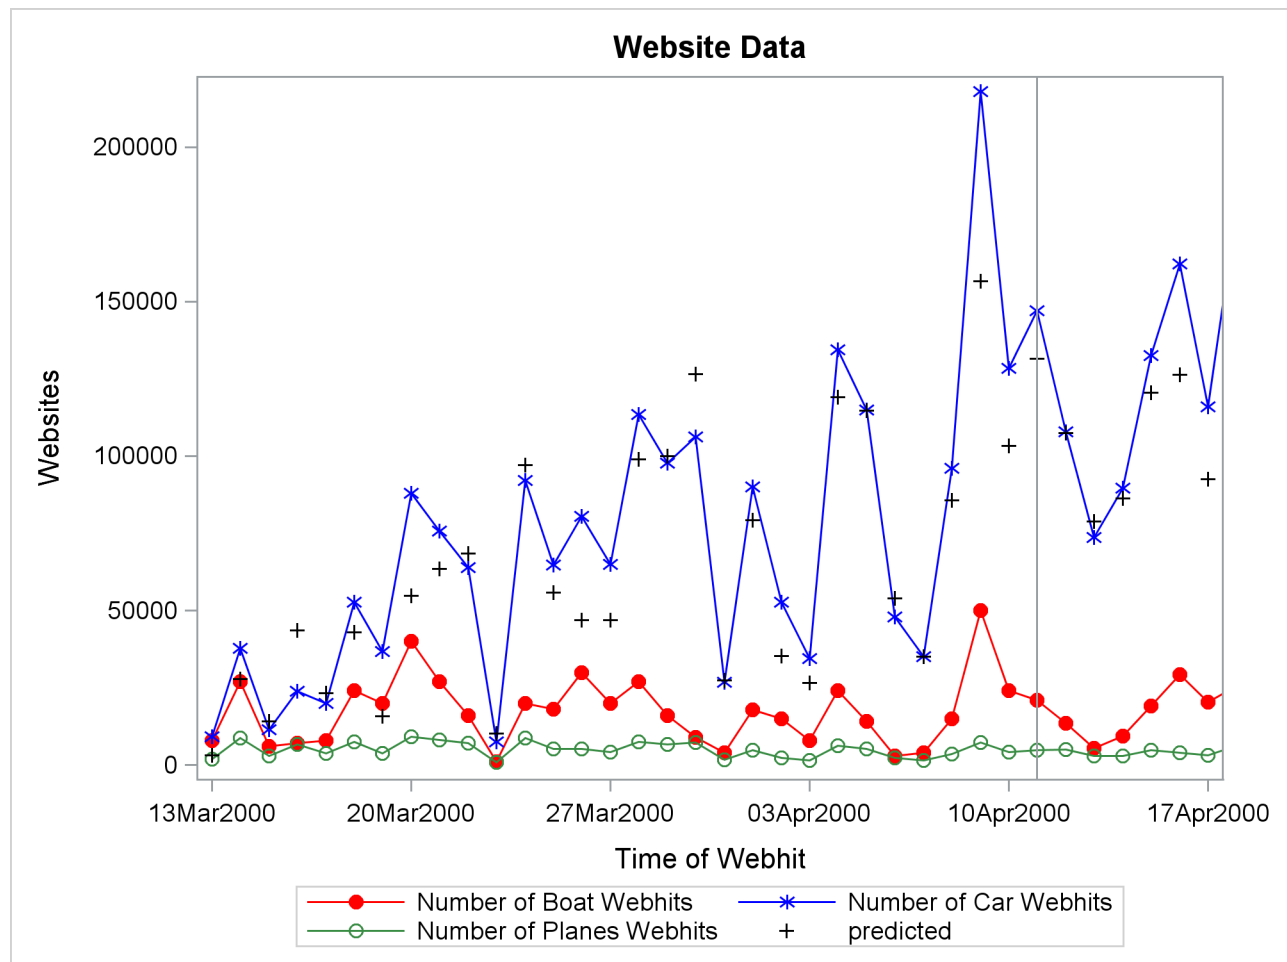
The following statements plot the forecasts related to the ENGINES variable:

```

title1 "Website Data";
proc sgplot data=enginehits;
    series x=time y=boats / markers
            markerattrs=(symbol=circlefilled color=red)
            lineattrs=(color=red);
    series x=time y=cars / markers
            markerattrs=(symbol=asterisk color=blue)
            lineattrs=(color=blue);
    series x=time y=planes / markers
            markerattrs=(symbol=circle color=styg)
            lineattrs=(color=styg);
    scatter x=time y=predicted / markerattrs=(symbol=plus color=black);
    refline '11APR2000:00:00:00'dt / axis=x;
    xaxis values=('13MAR2000:00:00:00'dt to '18APR2000:00:00:00'dt by dtweek);
    yaxis label='Websites' minor;
run;

```

The plots are shown in [Output 14.4.1](#). The historical data is shown to the left of the reference line and the forecasts for the next seven daily periods are shown to the right.

Output 14.4.1 Internet Data Forecast Plots**Example 14.5: Illustration of ODS Graphics**

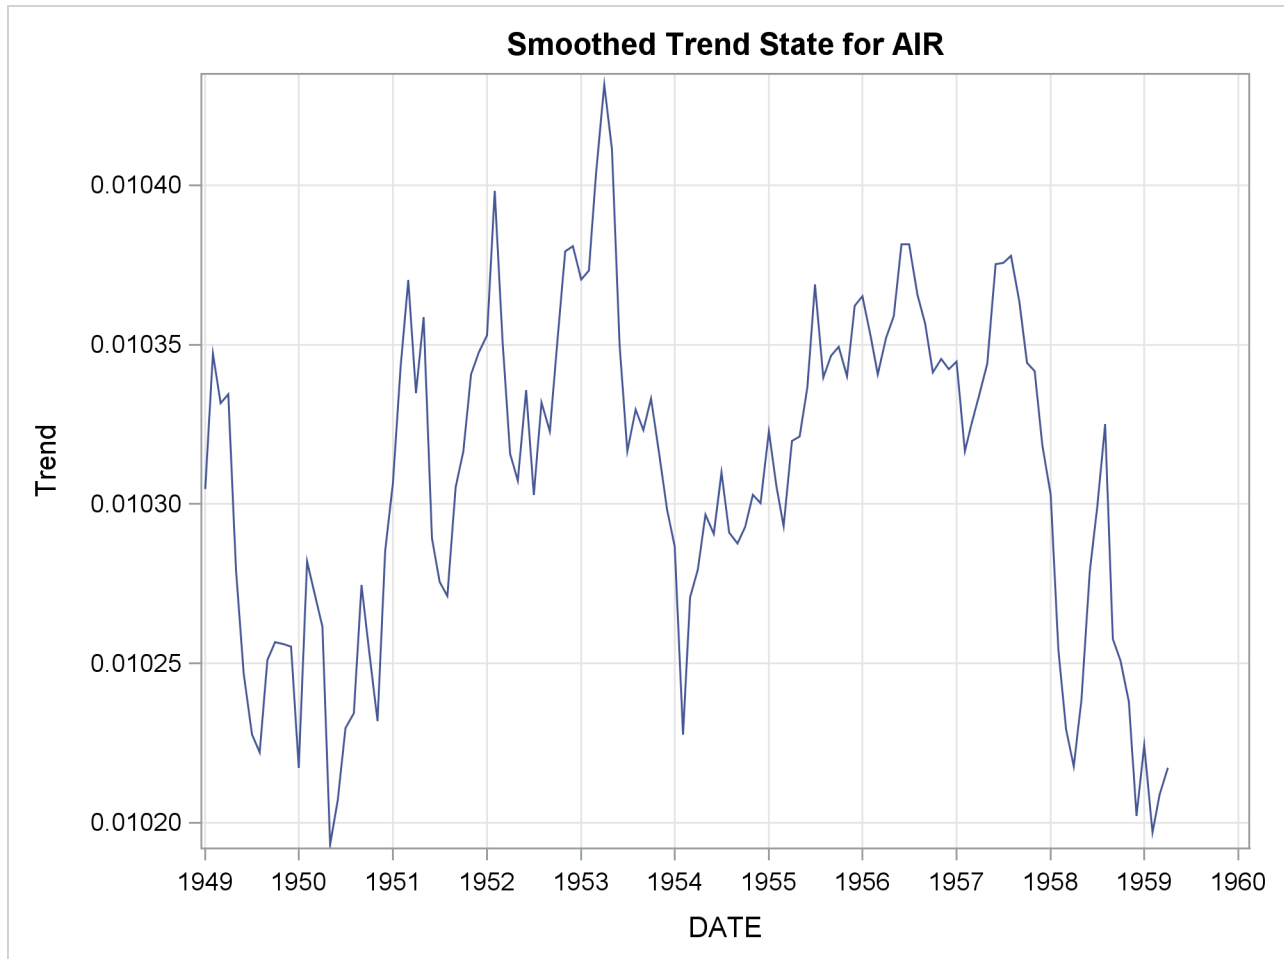
This example illustrates the use of ODS graphics in the ESM procedure and uses the SASHELP.AIR data set to forecast the time series of international airline travel.

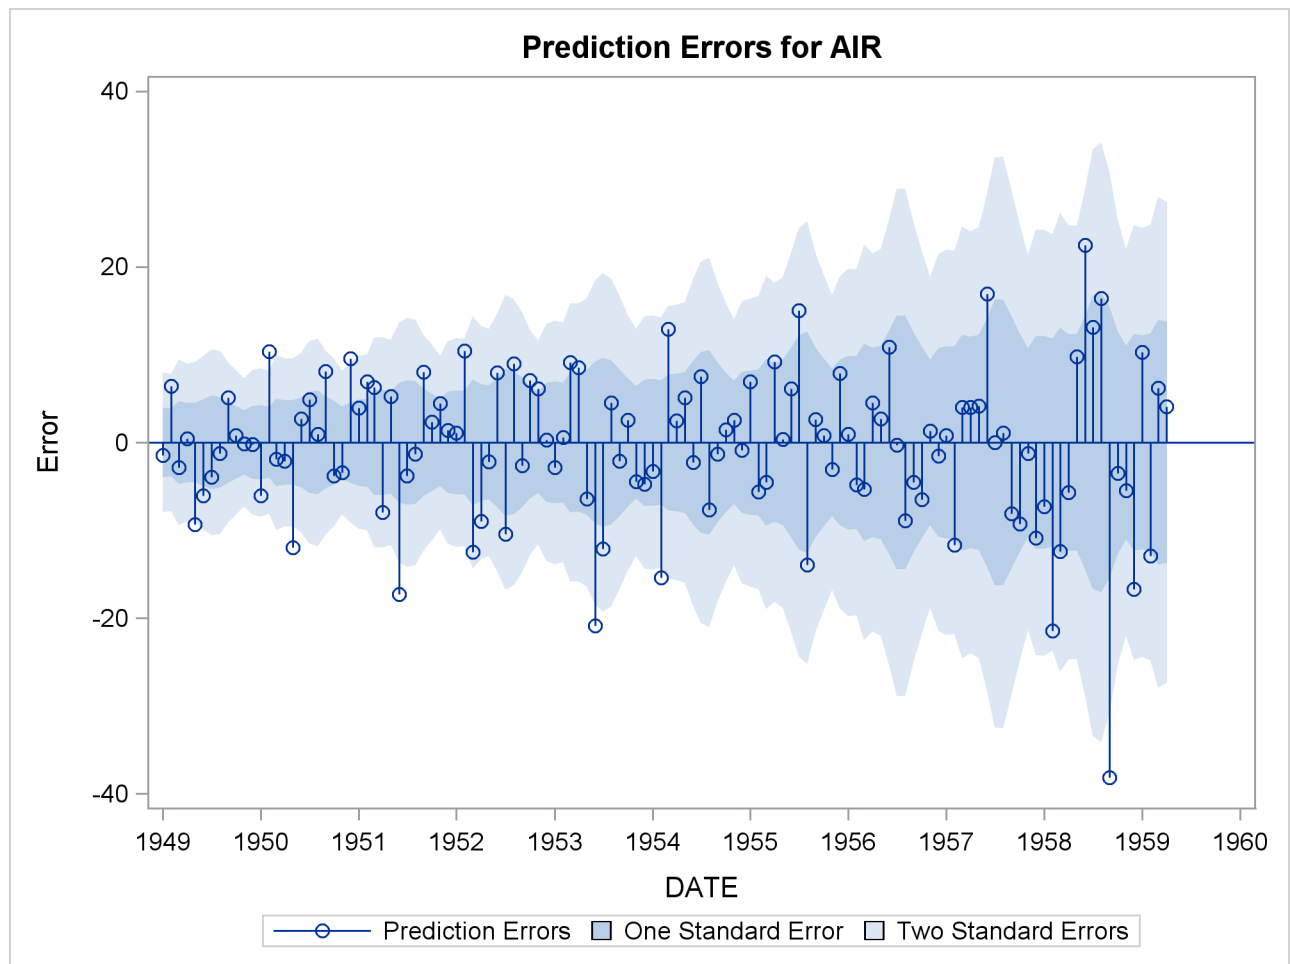
The graphical displays are requested by specifying the **PLOT=** option in the PROC ESM statement. In this case, all plots are requested. [Output 14.5.1](#) through [Output 14.5.5](#) show a selection of the plots created.

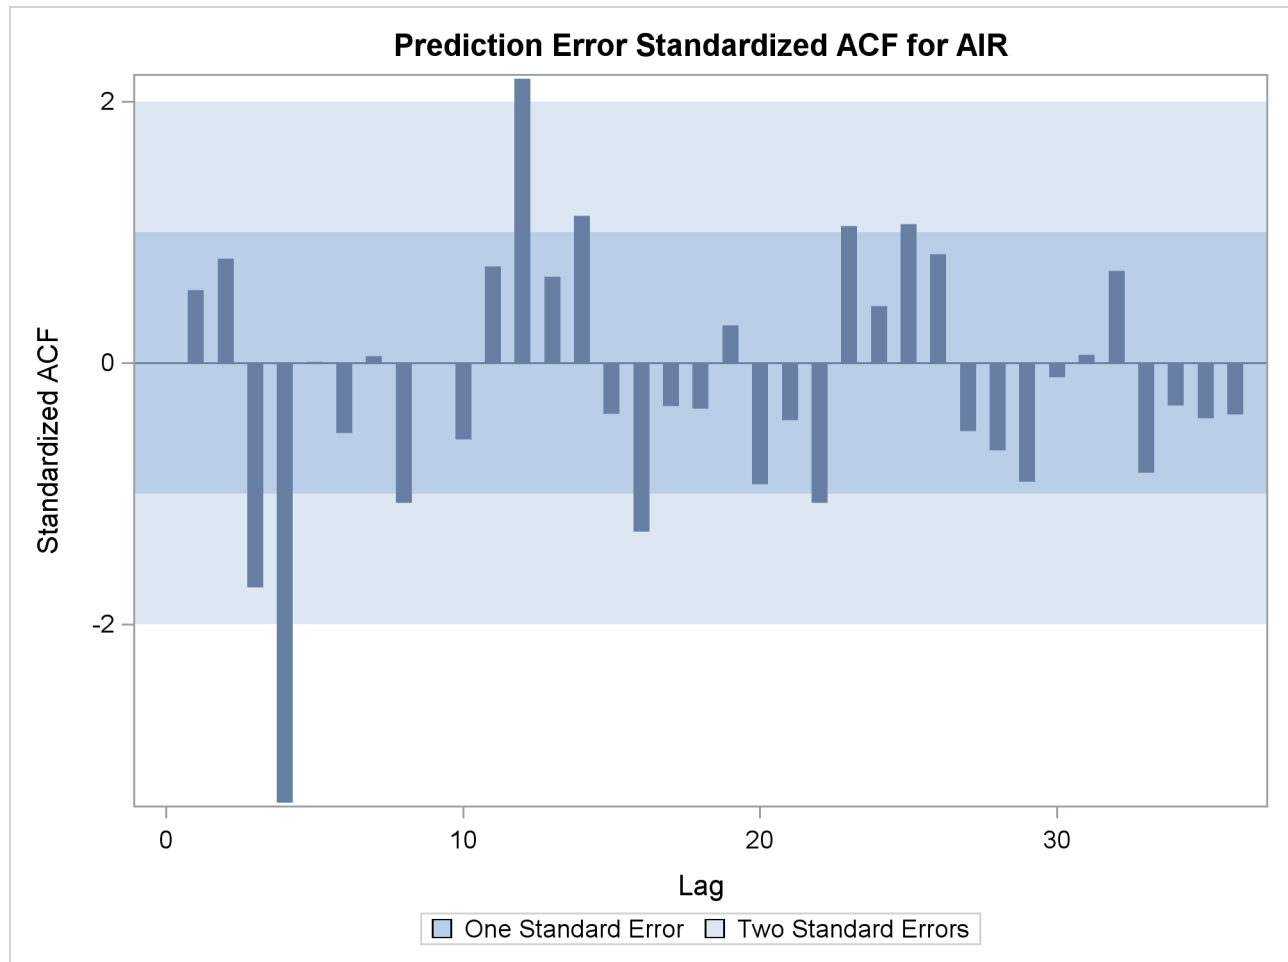
For information about the graphics available in the ESM procedure, see the section “[ODS Graphics](#)” on page 776.

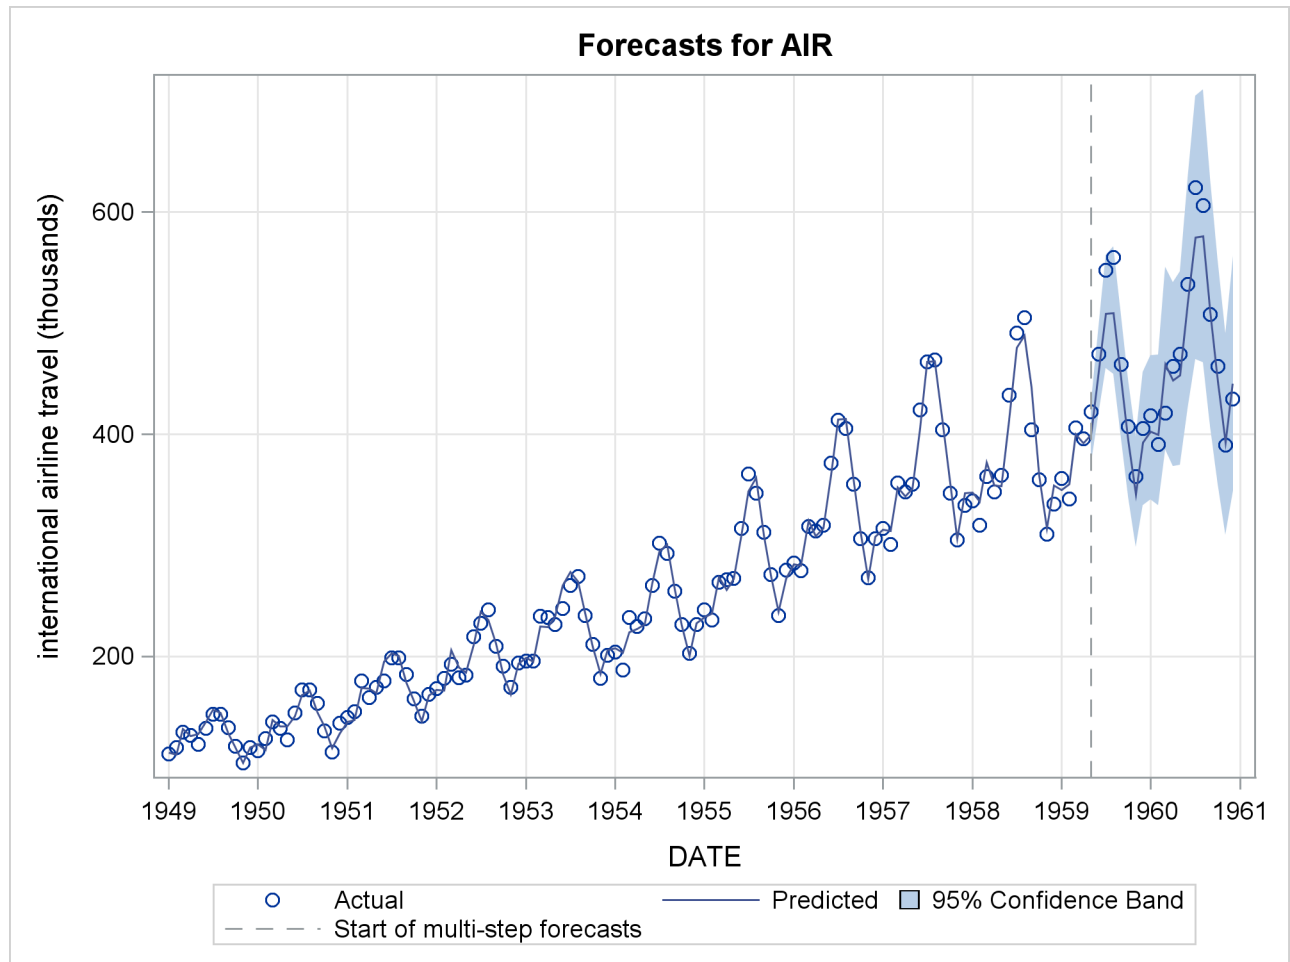
```
proc esm data=sashelp.air out=_null_  
    lead=20  
    back=20  
    print=all  
    plot=all;  
    id date interval=month;  
    forecast air / model=addwinters transform=log;  
run;
```

Output 14.5.1 Smoothed Trend Plot

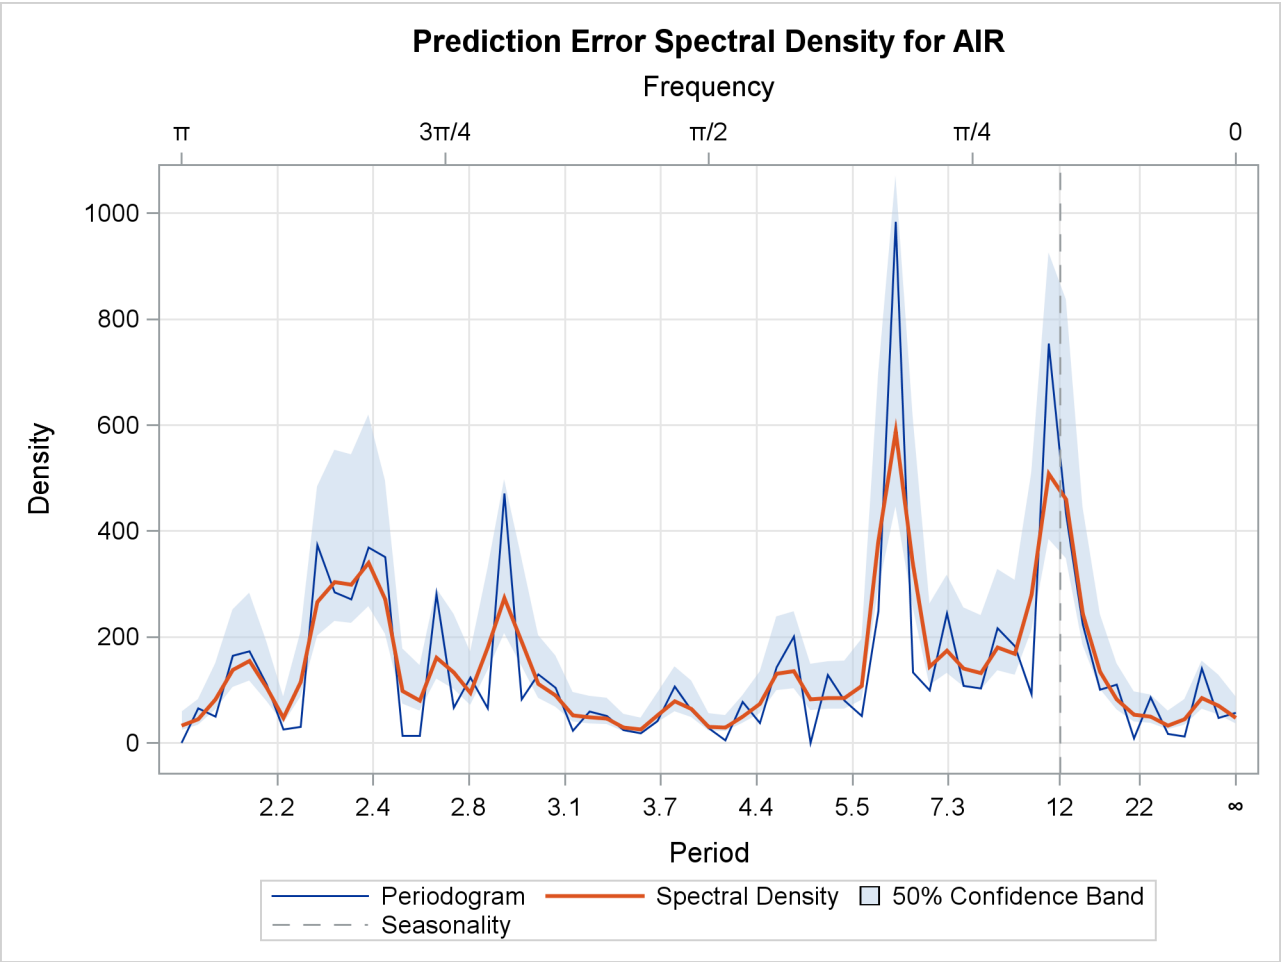


Output 14.5.2 Prediction Error Plot

Output 14.5.3 Prediction Error Standardized ACF Plot

Output 14.5.4 Forecast Plot

Output 14.5.5 Prediction Error Spectral Density



Chapter 15

The EXPAND Procedure

Contents

Overview: EXPAND Procedure	792
Getting Started: EXPAND Procedure	793
Converting to Higher Frequency Series	793
Aggregating to Lower Frequency Series	793
Combining Time Series with Different Frequencies	794
Interpolating Missing Values	795
Requesting Different Interpolation Methods	795
Using the ID Statement	796
Specifying Observation Characteristics	796
Converting Observation Characteristics	797
Creating New Variables	798
Transforming Series	798
Syntax: EXPAND Procedure	799
Functional Summary	800
PROC EXPAND Statement	800
BY Statement	803
CONVERT Statement	804
ID Statement	805
Details: EXPAND Procedure	805
Frequency Conversion	805
Identifying Observations	807
Range of Output Observations	808
Extrapolation	808
OBSERVED= Option	809
Conversion Methods	811
Transformation Operations	813
OUT= Data Set	828
OUTEST= Data Set	828
ODS Graphics	829
Examples: EXPAND Procedure	832
Example 15.1: Combining Monthly and Quarterly Data	832
Example 15.2: Illustration of ODS Graphics	834
Example 15.3: Interpolating Irregular Observations	838
Example 15.4: Using Transformations	841
References	842

Overview: EXPAND Procedure

The EXPAND procedure converts time series from one sampling interval or frequency to another and interpolates missing values in time series. A wide array of data transformations is also supported. Using PROC EXPAND, you can collapse time series data from higher frequency intervals to lower frequency intervals, or expand data from lower frequency intervals to higher frequency intervals. For example, quarterly values can be aggregated to produce an annual series, or quarterly estimates can be interpolated from an annual series.

Time series frequency conversion is useful when you need to combine series with different sampling intervals into a single data set. For example, if you need as input to a monthly model a series that is only available quarterly, you might use PROC EXPAND to interpolate the needed monthly values.

You can also interpolate missing values in time series, either without changing series frequency or in conjunction with expanding or collapsing the series.

You can convert between any combination of input and output frequencies that can be specified by SAS time interval names. (See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for a complete description of SAS interval names.) When the FROM= and TO= options are used to specify *from* and *to* intervals, PROC EXPAND automatically accounts for calendar effects such as the differing number of days in each month and leap years.

The EXPAND procedure also handles conversions of frequencies that cannot be defined by standard interval names. Using the FACTOR= option, you can interpolate any number of output observations for each group of a specified number of input observations. For example, if you specify the option FACTOR=(13:2), 13 equally spaced output observations are interpolated from each pair of input observations.

You can also convert aperiodic series, observed at arbitrary points in time, into periodic estimates. For example, a series of randomly timed quality control spot-check results might be interpolated to form estimates of monthly average defect rates.

The EXPAND procedure can also change the observation characteristics of time series. Time series observations can measure beginning-of-period values, end-of-period values, midpoint values, or period averages or totals. PROC EXPAND can convert between these cases. You can construct estimates of interval averages from end-of-period values of a variable, estimate beginning-of-period or midpoint values from interval averages, or compute averages from interval totals, and so forth.

By default, the EXPAND procedure fits cubic spline curves to the nonmissing values of variables to form continuous-time approximations of the input series. Output series are then generated from the spline approximations. Several alternate conversion methods are described in the section “[Conversion Methods](#)” on page 811. You can also interpolate estimates of the rate of change of time series by differentiating the interpolating spline curve.

Various transformations can be applied to the input series prior to interpolation and to the interpolated output series. For example, the interpolation process can be modified by transforming the input series, interpolating the transformed series, and applying the inverse of the input transformation to the output series. PROC EXPAND can also be used to apply transformations to time series without interpolation or frequency conversion.

The results of the EXPAND procedure are stored in a SAS data set. No printed output is produced.

Getting Started: EXPAND Procedure

Converting to Higher Frequency Series

To create higher frequency estimates, specify the input and output intervals with the FROM= and TO= options, and list the variables to be converted in a CONVERT statement. For example, suppose variables X, Y, and Z in the data set ANNUAL are annual time series, and you want monthly estimates. You can interpolate monthly estimates by using the following statements:

```
proc expand data=annual out=monthly from=year to=month;
  convert x y z;
run;
```

Note that interpolating values of a time series does not add any real information to the data as the interpolation process is not the same process that generated the other (nonmissing) values in the series. While time series interpolation can sometimes be useful, great care is needed in analyzing time series containing interpolated values.

Aggregating to Lower Frequency Series

PROC EXPAND provides two ways to convert from a higher frequency to a lower frequency. When a curve fitting method is used, converting to a lower frequency is no different than converting to a higher frequency—you just specify the desired output frequency with the TO= option. This provides for interpolation of missing values and allows conversion from non-nested intervals, such as converting from weekly to monthly values.

Alternatively, you can specify simple aggregation or selection without interpolation of missing values. This might be useful, for example, if you want to add up monthly values to produce annual totals, but want the annual output data set to contain values only for complete years.

To perform simple aggregation, use the METHOD=AGGREGATE option in the CONVERT statement. For example, the following statements aggregate monthly values to yearly values:

```
proc expand data=monthly out=annual
  from=month to=year;
  convert x y z / method=aggregate;
  convert a b c / method=aggregate observed=total;
  id date;
run;
```

This example assumes that the variables X, Y, and Z represent point-in-time values observed at the beginning of each month, and that the desired results are point-in-time values observed at the beginning of each year. (The default value of the OBSERVED= option is OBSERVED=(BEGINNING,BEGINNING).) The variables A, B, and C are assumed to represent monthly totals, and that the desired results are annual totals; therefor the option OBSERVED=TOTAL is specified. See the section “[Specifying Observation Characteristics](#)” on page 796 for more information on the OBSERVED= option.

Note that the AGGREGATE method can be used only if the input intervals are nested within the output intervals, as when converting from daily to monthly or from monthly to yearly frequency.

Combining Time Series with Different Frequencies

One important use of PROC EXPAND is to combine time series measured at different sampling frequencies. For example, suppose you have data on monthly money stocks (M1), quarterly gross domestic product (GDP), and weekly interest rates (INTEREST), and you want to perform an analysis of a model that uses all these variables. To perform the analysis, you first need to convert the series to a common frequency and then combine the variables into one data set.

The following statements illustrate this process for the three data sets QUARTER, MONTHLY, and WEEKLY. The data sets QUARTER and WEEKLY are converted to monthly frequency using two PROC EXPAND steps, and the three data sets are then merged using a DATA step MERGE statement to produce the data set COMBINED. The quarterly GDP data are interpolated as the total GDP over each month (OBSERVED=TOTAL) while the weekly INTEREST data are converted to average rates over each month (OBSERVED=AVERAGE).

```
proc expand data=quarter out=temp1
           from=qtr to=month;
  id date;
  convert gdp / observed=total;
run;

proc expand data=weekly out=temp2
           from=week to=month;
  id date;
  convert interest / observed=average;
run;

data combined;
  merge monthly temp1 temp2;
  by date;
run;
```

See Chapter 3, “[Working with Time Series Data](#),” for further discussion of time series periodicity, time series dating, and time series interpolation. See the section “[Specifying Observation Characteristics](#)” on page 796 for more information on the OBSERVED= option.

Interpolating Missing Values

To interpolate missing values in time series without converting the observation frequency, leave off the `TO=` option on the `PROC EXPAND` statement. For example, the following statements interpolate any missing values in the time series in the data set `ANNUAL`.

```
proc expand data=annual out=new from=year;
  id date;
  convert x y z;
  convert a b c / observed=total;
run;
```

This example assumes that the variables `X`, `Y`, and `Z` represent point-in-time values observed at the beginning of each year. (The default value of the `OBSERVED=` option is `OBSERVED=BEGINNING`.) The variables `A`, `B`, and `C` are assumed to represent annual totals.

To interpolate missing values in variables observed at specific points in time, omit both the `FROM=` and `TO=` options and use the `ID` statement to supply time values for the observations. The observations do not need to be periodic or form regular time series, but the data set must be sorted by the `ID` variable. For example, the following statements interpolate any missing values in the numeric variables in the data set `A`.

```
proc expand data=a out=b;
  id date;
run;
```

If the observations are equally spaced in time, and all the series are observed as beginning-of-period values, only the input and output data sets need to be specified. For example, the following statements interpolate any missing values in the numeric variables in the data set `A` using a cubic spline function, assuming that the observations are at equally spaced points in time.

```
proc expand data=a out=b;
run;
```

Refer to the section “[Missing Values](#)” on page 820 for further information.

Requesting Different Interpolation Methods

By default, a cubic spline curve is fit to the input series, and the output is computed from this interpolating curve. Other interpolation methods can be specified with the `METHOD=` option on the `CONVERT` statement. The section “[Conversion Methods](#)” on page 811 explains the available methods.

For example, the following statements convert annual series to monthly series using linear interpolation instead of cubic spline interpolation.

```
proc expand data=annual out=monthly from=year to=month;
  id date;
  convert x y z / method=join;
run;
```

Using the ID Statement

An ID statement is normally used with PROC EXPAND to specify a SAS date or datetime variable to identify the time of each input observation. An ID variable allows PROC EXPAND to do the following:

- identify the observations in the output data set
- determine the time span between observations and detect gaps in the input series caused by omitted observations
- account for calendar effects such as the number of days in each month and leap years

If you do not specify an ID variable with SAS date or datetime values, PROC EXPAND makes default assumptions that may not be what you want. See the section “[ID Statement](#)” on page 805 for details.

Specifying Observation Characteristics

It is important to distinguish between variables that are measured at points in time and variables that represent totals or averages over an interval. Point-in-time values are often called *stocks* or *levels*. Variables that represent totals or averages over an interval are often called *flows* or *rates*.

For example, the annual series *U.S. Gross Domestic Product* represents the total value of production over the year and also the yearly average rate of production in dollars per year. However, a monthly variable *inventory* may represent the cost of a stock of goods as of the end of the month.

When the data represent periodic totals or averages, the process of interpolation to a higher frequency is sometimes called *distribution*, and the total values of the larger intervals are said to be *distributed* to the smaller intervals. The process of interpolating periodic total or average values to lower frequency estimates is sometimes called *aggregation*.

By default, PROC EXPAND assumes that all time series represent beginning-of-period point-in-time values. If a series does not measure beginning of period point-in-time values, interpolation of the data values using this assumption is not appropriate, and you should specify the correct observation characteristics of the series. The observation characteristics of the series are specified with the **OBSERVED=** option on the CONVERT statement.

For example, suppose that the data set ANNUAL contains variables A, B, and C that measure yearly totals, while the variables X, Y, and Z measure first-of-year values. The following statements estimate the contribution of each month to the annual totals in A, B, and C, and interpolate first-of-month estimates of X, Y, and Z.

```
proc expand data=annual out=monthly
    from=year to=month;
    id date;
    convert x y z;
    convert a b c / observed=total;
run;
```

The EXPAND procedure supports five different observation characteristics. The **OBSERVED=** *value* options for these five observation characteristics are:

BEGINNING	beginning-of-period values
MIDDLE	period midpoint values
END	end-of-period values
TOTAL	period totals
AVERAGE	period averages

The interpolation of each series is adjusted appropriately for its observation characteristics. When **OBSERVED=TOTAL** or **AVERAGE** is specified, the interpolating curve is fit to the data values so that the area under the curve within each input interval equals the value of the series. For **OBSERVED=MIDDLE** or **END**, the curve is fit through the data points, with the time position of each data value placed at the specified offset from the start of the interval.

See the section “**OBSERVED= Option**” on page 809 for details.

Converting Observation Characteristics

The EXPAND procedure can be used to interpolate values for output series with different observation characteristics than the input series. To change observation characteristics, specify two values in the **OBSERVED=** option. The first value specifies the observation characteristics of the input series; the second value specifies the observation characteristics of the output series.

For example, the following statements convert the period total variable A in the data set ANNUAL to yearly midpoint estimates. This example does not change the series frequency, and the other variables in the data set are copied to the output data set unchanged.

```
proc expand data=annual out=new from=year;
    id date;
    convert a / observed=(total,middle);
run;
```

Creating New Variables

You can use the CONVERT statement to name a new variable to contain the results of the conversion. Using this feature, you can create several different versions of a series in a single PROC EXPAND step. Specify the new name after the input variable name and an equal sign:

```
convert variable=newname ... ;
```

For example, suppose you are converting quarterly data to monthly and you want both first-of-month and midmonth estimates for a beginning-of-period variable X. The following statements perform this task:

```
proc expand data=a out=b
      from=qtr to=month;
  id date;
  convert x=x_begin / observed=beginning;
  convert x=x_mid   / observed=(beginning,middle);
run;
```

Transforming Series

The interpolation methods used by PROC EXPAND assume that there are no restrictions on the range of values that series can have. This assumption can sometimes cause problems if the series must be within a certain range.

For example, suppose you are converting monthly sales figures to weekly estimates. Sales estimates should never be less than zero, but since the spline curve ignores this restriction some interpolated values may be negative. One way to deal with this problem is to transform the input series before fitting the interpolating spline and then reverse transform the output series.

You can apply various transformations to the input series using the **TRANSFORMIN=** option on the CONVERT statement. (The TRANSFORMIN= option can be abbreviated as TRANSFORM= or TIN=.) You can apply transformations to the output series using the **TRANSFORMOUT=** option. (The TRANSFORMOUT= option can be abbreviated as TOUT=.)

For example, you might use a logarithmic transformation of the input sales series and exponentiate the interpolated output series. The following statements fit a spline curve to the log of SALES and then exponentiate the output series.

```
proc expand data=a out=b from=month to=week;
  id date;
  convert sales / observed=total
                transformin=(log)
                transformout=(exp);
run;
```


Note that the transformations specified by the TRANSFORMIN= option are applied before the data are interpolated; the cubic spline curve or other interpolation method is fitted to transformed input data. The transformations specified by the TRANSFORMOUT= option are applied to interpolated values computed from the curves fit to the transformed input data.

As another example, suppose you are interpolating missing values in a series of market share estimates. Market shares must be between 0% and 100%, but applying a spline interpolation to the raw series can produce estimates outside of this range.

The following statements use the logistic transformation to transform proportions in the range 0 to 1 to values in the range $-\infty$ to $+\infty$. The TIN= option first divides the market shares by 100 to rescale percent values to proportions and then applies the LOGIT function. The TOUT= option applies the inverse logistic function ILOGIT to the interpolated values to convert back to proportions and then multiplies by 100 to rescale back to percentages.

```
proc expand data=a out=b;
  id date;
  convert mshare / tin=( / 100 logit )
                                tout=( ilogit * 100 );
run;
```

When more than one transformation is specified in the TRANSFORMIN= or TRANSFORMOUT= option, the transformations are applied in the order in which they are listed. Thus in the above example the complete input transformation is *logit(mshare/100)* (and not *logit(mshare)/100*) because the division operation is listed first in the TIN= option.

You can also use the TRANSFORM= (or TRANSFORMOUT=) option as a convenient way to do calculations normally performed with the SAS DATA step. For example, the following statements add the lead of X to the data set A. The METHOD=NONE option is used to suppress interpolation.

```
proc expand data=a method=none;
  id date;
  convert x=xlead / transform=(lead);
run;
```

Any number of operations can be listed in the TRANSFORMIN= and TRANSFORMOUT= options. See [Table 15.2](#) for a list of the operations supported.

Syntax: EXPAND Procedure

The EXPAND procedure uses the following statements:

```
PROC EXPAND options ;
BY variables ;
CONVERT variables / options ;
ID variable ;
```

Functional Summary

The statements and options controlling the EXPAND procedure are summarized in the following table.

Description	Statement	Option
Statements		
specify options	PROC EXPAND	
specify BY-group processing	BY	
specify conversion options	CONVERT	
specify the ID variable	ID	
Data Set Options		
specify the input data set	PROC EXPAND	DATA=
extrapolate values before or after input series	PROC EXPAND	EXTRAPOLATE
specify the output data set	PROC EXPAND	OUT=
write interpolating functions to a data set	PROC EXPAND	OUTEST=
Input and Output Frequencies		
control the alignment of SAS Date values	PROC EXPAND	ALIGN=
specify frequency conversion factor	PROC EXPAND	FACTOR=
specify input frequency	PROC EXPAND	FROM=
specify output frequency	PROC EXPAND	TO=
Interpolation Control Options		
specify interpolation method for all series	PROC EXPAND	METHOD=
specify interpolation method for series	CONVERT	METHOD=
specify observation characteristics for series	PROC EXPAND	OBSERVED=
specify observation characteristics for series	CONVERT	OBSERVED=
specify transformations of the input series	CONVERT	TRANSFORMIN=
specify transformations of the output series	CONVERT	TRANSFORMOUT=
Graphical Output Control Options		
specify graphical output	PROC EXPAND	PLOTS=

PROC EXPAND Statement

PROC EXPAND *options* ;

The following options can be used with the PROC EXPAND statement:

Data Set Options

DATA= *SAS-data-set*

names the input data set. If the DATA= option is omitted, the most recently created SAS data set is used.

OUT= *SAS-data-set*

names the output data set containing the resulting time series. If OUT= is not specified, the data set is named using the DATA*n* convention. See the section “[OUT= Data Set](#)” on page 828 for details.

OUTEST= *SAS-data-set*

names an output data set containing the coefficients of the spline curves fit to the input series. If the OUTEST= option is not specified, the spline coefficients are not output. See the section “[OUTEST= Data Set](#)” on page 828 for details.

Options That Define Input and Output Frequencies

ALIGN= *option*

controls the alignment of SAS dates used to identify output observations. The ALIGN= option allows the following values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. BEGINNING is the default.

FACTOR= *n*

FACTOR=(*n* : *m*)

specifies the number of output observations to be created from the input observations. FACTOR=*n* specifies that *n* output observations are to be produced for each input observation. FACTOR=(*n* : *m*) specifies that *n* output observations are to be produced for each group of *m* input observations. FACTOR=*n* is the same as FACTOR=(*n* : 1).

In the FACTOR=() option, a comma can be used instead of a colon or the delimiter can be omitted. Thus FACTOR=(*n*, *m*) or FACTOR=(*n m*) is the same as FACTOR=(*n* : *m*).

The FACTOR= option cannot be used if the TO= option is used. The default value is FACTOR=(1:1). For more information, see the section “[Frequency Conversion](#)” on page 805.

FROM= *interval*

specifies the time interval between observations in the input data set. Examples of FROM= values are YEAR, QTR, MONTH, DAY, and HOUR. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for a complete description and examples of interval specifications.

TO= *interval*

specifies the time interval between observations in the output data set. By default, the TO= interval is generated from the combination of the FROM= and the FACTOR= values or is set to be the same as the FROM= value if FACTOR= is not specified. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for a description of interval specifications.

Options to Control the Interpolation

EXTRAPOLATE

specifies that missing values at the beginning or end of input series be replaced with values produced by a linear extrapolation of the interpolating curve fit to the input series. See the section “[Extrapolation](#)” on page 808 later in this chapter for details.

By default, PROC EXPAND avoids extrapolating values beyond the first or last input value for a series and only interpolates values within the range of the nonmissing input values. Note that the extrapolated values are often not very accurate and for the SPLINE method the EXTRAPOLATE option results may be very unreasonable. The EXTRAPOLATE option is rarely used.

METHOD= *option*

METHOD=SPLINE(*constraint* < , *constraint* >)

specifies the method used to convert the data series. The methods supported are SPLINE, JOIN, STEP, AGGREGATE, and NONE. The METHOD= option specified on the PROC EXPAND statement can be overridden for particular series by the METHOD= option on the CONVERT statement. The default is METHOD=SPLINE. The *constraint* specifications for METHOD=SPLINE can have the values NOTAKNOT (the default), NATURAL, SLOPE=*value*, and/or CURVATURE=*value*. See the section “[Conversion Methods](#)” on page 811 for more information about these methods.

OBSERVED= *value*

OBSERVED=(*from-value* , *to-value*)

indicates the observation characteristics of the input time series and of the output series. Specifying the OBSERVED= option on the PROC EXPAND statement sets the default OBSERVED= value for subsequent CONVERT statements. See the sections “[CONVERT Statement](#)” on page 804 and “[OBSERVED= Option](#)” on page 809 later in this chapter for details. The default is OBSERVED=BEGINNING.

Options to Control Graphical Output

PLOTS= *option* | (*options*)

specifies the graphical output desired. If the PLOTS= option is used, the specified graphical output is produced for each output variable that is specified by a CONVERT statement. By default, the EXPAND procedure produces no graphical output. The following PLOTS= options are available:

INPUT	plots the input series.
TRANSFORMIN	plots the transformed input series. The TRANSFORMIN= option must also be specified in the CONVERT statement.
CROSSINPUT	plots both the input series and the transformed input series on one plot with two Y axes. The input and transformed series are shown on separate scales. The TRANSFORMIN= option must also be specified in the CONVERT statement.
JOINTINPUT	plots both the input series and the transformed input series on one plot with one Y axis. The input and transformed series are shown on the same scale. The TRANSFORMIN= option must also be specified in the CONVERT statement.

CONVERTED	plots the converted series after input transformations and interpolation, but before any TRANSFORMOUT= transformations are applied. The METHOD= option must also be specified in the PROC EXPAND or CONVERT statements.
TRANSFORMOUT	plots the transformed output series. The TRANSFORMOUT= option must also be specified in the CONVERT statement.
CROSSOUTPUT	plots both the converted series and the transformed output series on one plot with two Y axes. The converted and transformed output series are shown on separate scales. The TRANSFORMOUT= option must also be specified in the CONVERT statement.
JOINTOUTPUT	plots both the converted series and the transformed output series on one plot with one Y axis. The converted and transformed output series are shown on the same scale. The TRANSFORMOUT= option must also be specified in the CONVERT statement.
OUTPUT	plots the series stored in the OUT= data set. The OUTPUT option does not require any options to be specified in the CONVERT statement.
ALL	produces all plots except the joint and cross plots. PLOTS=ALL is the same as PLOTS=(INPUT TRANSFORMIN CONVERTED TRANSFORMOUT).

The PLOTS= option produces results associated with each CONVERT statement output variable and the options listed in the PLOTS= specification. See the section “[PLOTS= Option Details](#)” on page 830 for more information.

BY Statement

BY variables ;

A BY statement can be used with PROC EXPAND to obtain separate analyses on observations in groups defined by the BY variables. The input data set must be sorted by the BY variables and be sorted by the ID variable within each BY group.

Use a BY statement when you want to interpolate or convert time series within levels of a cross-sectional variable. For example, suppose you have a data set STATE containing annual estimates of average disposable personal income per capita (DPI) by state and you want quarterly estimates by state. These statements convert the DPI series within each state:

```
proc sort data=state;
    by state date;
run;

proc expand data=state out=stateqtr from=year to=qtr;
    convert dpi;
    by state;
    id date;
run;
```

CONVERT Statement

CONVERT *variable* = *newname* ... < / *options* > ;

The CONVERT statement lists the variables to be processed. Only numeric variables can be processed.

For each of the variables listed, a new variable name can be specified after an equal sign to name the variable in the output data set that contains the converted values. If a name for the output series is not given, the variable in the output data set has the same name as the input variable. Variable lists may be used only when no name is given for the output series.

For example, variable lists can be specified as follows:

```
convert y1-y25 / observed=(beginning,end);
convert x--a / observed=average;
convert x-numeric-a / observed=average;
```

Any number of CONVERT statements can be used. If no CONVERT statement is used, all the numeric variables in the input data set except those appearing in the BY and ID statements are processed.

The following options can be used with the CONVERT statement.

METHOD= *option*

METHOD=SPLINE(*constraint* < , *constraint* >)

specifies the method used to convert the data series. (The method specified by the METHOD= option is applied to the input data series after applying any transformations specified by the TRANSFORMIN= option.) The methods supported are SPLINE, JOIN, STEP, AGGREGATE, and NONE. The METHOD= option specified on the PROC EXPAND statement can be overridden for particular series by the METHOD= option on the CONVERT statement. The default is METHOD=SPLINE. The *constraint* specifications for METHOD=SPLINE can have the values NOTAKNOT (the default), NATURAL, SLOPE=*value*, and/or CURVATURE=*value*. See the section “[Conversion Methods](#)” on page 811 section for more information about these methods.

OBSERVED= *value*

OBSERVED=(*from-value* , *to-value*)

indicates the observation characteristics of the input time series and of the output series. The values supported are TOTAL, AVERAGE, BEGINNING, MIDDLE, and END. In addition, DERIVATIVE can be specified as the *to-value* when the SPLINE method is used.

When only one value is specified, that value specifies both the *from-value* and the *to-value*. (That is, OBSERVED=*value* is equivalent to OBSERVED=(*value*, *value*).) If the OBSERVED= option is omitted from both the PROC EXPAND and the CONVERT statements, the default is OBSERVED=(BEGINNING, BEGINNING). See the section “[OBSERVED= Option](#)” on page 809 for details.

TRANSFORMIN=(*operation* ...)

specifies a list of transformations to be applied to the input series before the interpolating function is fit. The operations are applied in the order listed. See the section “[Transformation Operations](#)” on

page 813 later in this chapter for the operations that can be specified. The TRANSFORMIN= option can be abbreviated as TRANSIN=, TIN=, or TRANSFORM=.

TRANSFORMOUT=(operation . . .)

specifies a list of transformations to be applied to the output series. The operations are applied in the order listed. See the section “[Transformation Operations](#)” on page 813 later in this chapter for the operations that can be specified. The TRANSFORMOUT= option can be abbreviated as TRANSOUT=, or TOUT=.

ID Statement

ID variable ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable’s values are assumed to be SAS date or datetime values.

The input data must form time series. This means that the observations in the input data set must be sorted by the ID variable (within the BY variables, if any). Moreover, there should be no duplicate observations, and no two observations should have ID values within the same time interval as defined by the FROM= option.

If the ID statement is omitted, SAS date or datetime values are generated to label the input observations. These ID values are generated by assuming that the input data set starts at a SAS date value of 0, that is, 1 January 1960. This default starting date is then incremented for each observation by the FROM= interval (using the same logic as DATA step INTNX function). If the FROM= option is not specified, the ID values are generated as the observation count minus 1. When the ID statement is not used, an ID variable is added to the output data set named either DATE or DATETIME, depending on the value specified in the TO= option. If neither the TO= option nor the FROM= option is given, the ID variable in the output data set is named TIME.

Details: EXPAND Procedure

Frequency Conversion

Frequency conversion is controlled by the FROM=, TO=, and FACTOR= options. The possible combinations of these options are explained in the following:

None Used

If FROM=, TO=, and FACTOR= are not specified, no frequency conversion is done. The data are processed to interpolate any missing values and perform any specified transformations. Each input observation produces one output observation.

FACTOR=(n:m)

FACTOR=(n :m) specifies that *n* output observations are produced for each group of *m* input observations. The fraction *m* /*n* is reduced first: thus **FACTOR=(10:6)** is equivalent to **FACTOR=(5:3)**. Note that if *m* /*n* =1, the result is the same as the case given previously under “None Used”.

FROM=interval

The **FROM=** option used alone establishes the frequency and interval widths of the input observations. Missing values are interpolated, and any specified transformations are performed, but no frequency conversion is done.

TO=interval

When the **TO=** option is used without the **FROM=** option, output observations with the **TO=** frequency are generated over the range of input ID values. The first output observation is for the **TO=** interval containing the ID value of the first input observation; the last output observation is for the **TO=** interval containing the ID value of the last input observation. The input observations are not assumed to form regular time series and may represent aperiodic points in time. An ID variable is required to give the date or datetime of the input observations.

FROM=interval TO=interval

When both the **FROM=** and **TO=** options are used, the input observations have the frequency given by the **FROM=** interval, and the output observations have the frequency given by the **TO=** interval.

FROM=interval FACTOR=(n:m)

When both the **FROM=** and **FACTOR=** options are used, a **TO=** interval is inferred from the combination of the **FROM=interval** and the **FACTOR=(n:m)** values specified. For example, **FROM=YEAR FACTOR=4** is the same as **FROM=YEAR TO=QTR**. Also, **FROM=YEAR FACTOR=(3:2)** is the same as **FROM=YEAR** used with **TO=MONTH8**. Once the implied **TO=** interval is determined, this combination operates the same as if **FROM=** and **TO=** had been specified. If no valid **TO=** interval can be constructed from the combination of the **FROM=** and **FACTOR=** options, an error is produced.

TO=interval FACTOR=(n:m)

The combination of the **TO=** option and the **FACTOR=** option is not allowed and produces an error.

ALIGN= option

Controls the alignment of SAS dates used to identify output observations. The **ALIGN=** option allows the following values: **BEGINNING** | **BEG** | **B**, **MIDDLE** | **MID** | **M**, and **ENDING** | **END** | **E**. **BEGINNING** is the default.

Converting to a Lower Frequency

When converting to a lower frequency, the results are either exact or approximate, depending on whether or not the input interval nests within the output interval and depending on the need to interpolate missing values within the series. If the **TO=** interval is nested within the **FROM=** interval (as when converting from monthly to yearly), and if there are no missing input values or partial periods, the results are exact.

When values are missing or the **FROM=** interval is not nested within the **TO=** interval (as when aggregating from weekly to monthly), the results depend on an interpolation. The **METHOD=AGGREGATE** option always produces exact results, never an interpolation. However, this method can only be used if the **FROM=** interval is nested within the **TO=** interval.

Identifying Observations

The variable specified in the ID statement is used to identify the observations. Usually, SAS date or datetime values are used for this variable. PROC EXPAND uses the ID variable to do the following:

- identify the time interval of the input values
- validate the input data set observations
- compute the ID values for the observations in the output data set

Identifying the Input Time Intervals

When the FROM= option is specified, observations are understood to refer to the whole time interval and not to a single time point. The ID values are interpreted as identifying the FROM= time interval containing the value. In addition, the widths of these input intervals are used by the OBSERVED= values TOTAL, AVERAGE, MIDDLE, and END.

For example, if FROM=MONTH is specified, then each observation is for the whole calendar month containing the ID value for the observation, and the width of the time interval covered by the observation is the number of days in that month. Therefore, if FROM=MONTH, the ID value '31MAR92'D is equivalent to the ID value '1MAR92'D—both of these ID values identify the same interval, March of 1992.

Widths of Input Time Intervals

When the FROM= option is not specified, the ID variable values are usually interpreted as referring to points in time. However, if an OBSERVED= option value is specified that assumes the observations refer to whole intervals and also requires interval widths (TOTAL or AVERAGE), then, in the absence of the FROM= specification, interval widths are assumed to be the time span between ID values. For the last observation, the interval width is assumed to be the same as for the next to last observation. (If neither the FROM= option nor the ID statement are specified, interval widths are assumed to be 1.0.) A note is printed in the SAS log warning that this assumption is made.

Validating the Input Data Set Observations

The ID variable is used to verify that successive observations read from the input data set correspond to sequential FROM= intervals. When the FROM= option is not used, PROC EXPAND verifies that the ID values are nonmissing and in ascending order. An error message is produced and the observation is ignored when an invalid ID value is found in the input data set.

ID values for Observations in the Output Data Set

The time unit used for the ID variable in the output data set is controlled by the interval value specified by the TO= option. If you specify a date interval for the TO= value, the ID variable values in the output data

set are SAS date values. If you specify a datetime interval for the TO= value, the ID variable values in the output data set are SAS datetime values.

The date or datetime values for the ID variable for output observations is the first date or datetime of the TO= interval, unless the ALIGN= option is used to specify a different alignment. (For example, if TO=WEEK is specified, then the output dates are Sundays. If TO=WEEK.2 is specified, then the output date are Mondays.) See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information on interval specifications.

Range of Output Observations

If no frequency conversion is done, the range of output observations is the same as in the input data set.

When frequency conversion is done, the observations in the output data set range from the earliest start of any result series to the latest end of any result series. Observations at the beginning or end of the input range for which all result values are missing are not written to the OUT= data set.

When the EXTRAPOLATE option is not used, the range of the nonmissing output results for each series is as follows. The first result value is for the TO= interval that contains the ID value of the start of the FROM= interval containing the ID value of the first nonmissing input observation for the series. The last result value is for the TO= interval that contains the end of the FROM= interval containing the ID value of the last nonmissing input observation for the series.

When the EXTRAPOLATE option is used, result values for all series are computed for the full time range covered by the input data set.

Extrapolation

The spline functions fit by the EXPAND procedure are very good at approximating continuous curves within the time range of the input data but poor at extrapolating beyond the range of the data. The accuracy of the results produced by PROC EXPAND may be somewhat less at the ends of the output series than at time periods for which there are several input values at both earlier and later times. The curves fit by PROC EXPAND should not be used for forecasting.

PROC EXPAND normally avoids extrapolation of values beyond the time range of the nonmissing input data for a series, unless the EXTRAPOLATE option is used. However, if the start or end of the input series does not correspond to the start or end of an output interval, some output values may depend in part on an extrapolation.

For example, if FROM=YEAR, TO=WEEK, and OBSERVED=BEGINNING are specified, then the first observation output for a series is for the week of 1 January of the first nonmissing input year. If 1 January of that year is not a Sunday, the beginning of this week falls before the date of the first input value, and therefore a beginning-of-period output value for this week is extrapolated.

This extrapolation is made only to the extent needed to complete the terminal output intervals that overlap the endpoints of the input series and is limited to no more than the width of one FROM= interval or one

TO= interval, whichever is less. This restriction of the extrapolation to complete terminal output intervals is applied to each series separately, and it takes into account the OBSERVED= option for the input and output series.

When the EXTRAPOLATE option is used, the normal restriction on extrapolation is overridden. Output values are computed for the full time range covered by the input data set.

For the SPLINE method, extrapolation is performed by a linear projection of the trend of the cubic spline curve fit to the input data, not by extrapolation of the first and last cubic segments.

The EXTRAPLOTE option should be used with caution.

OBSERVED= Option

The values of the CONVERT statement OBSERVED= option are as follows:

BEGINNING	indicates that the data are beginning-of-period values. OBSERVED=BEGINNING is the default.
MIDDLE	indicates that the data are period midpoint values.
ENDING	indicates that the data represent end-of-period values.
TOTAL	indicates that the data values represent period totals for the time interval corresponding to the observation.
AVERAGE	indicates that the data values represent period averages.
DERIVATIVE	requests that the output series be the derivatives of the cubic spline curve fit to the input data by the SPLINE method.

If only one value is specified in the OBSERVED= option, that value applies to both the input and the output series. For example, OBSERVED=TOTAL is the same as OBSERVED=(TOTAL,TOTAL), which indicates that the input values represent totals over the time intervals corresponding to the input observations, and the converted output values also represent period totals. The value DERIVATIVE can be used only as the second OBSERVED= option value, and it can be used only when METHOD=SPLINE is specified or is the default method.

Since the TOTAL, AVERAGE, MIDDLE, and END cases require that the width of each input interval be known, both the FROM= option and an ID statement are normally required if one of these observation characteristics is specified for any series. However, if the FROM= option is not specified, each input interval is assumed to extend from the ID value for the observation to the ID value of the next observation, and the width of the interval for the last observation is assumed to be the same as the width for the next to last observation.

Scale of OBSERVED=AVERAGE Values

The average values are assumed to be expressed in the time units defined by the FROM= or TO= option. That is, the product of the average value for an interval and the width of the interval is assumed to equal the total

value for the interval. For purposes of interpolation, OBSERVED=AVERAGE values are first converted to OBSERVED=TOTAL values using this assumption, and then the interpolated totals are converted back to averages by dividing by the widths of the output intervals.

For example, suppose the options FROM=MONTH, TO=HOUR, and OBSERVED=AVERAGE are specified. Since FROM=MONTH is specified, each input value is assumed to represent an average rate per day such that the product of the value and the number of days in the month is equal to the total for the month. The input values are assumed to represent a per-day rate because FROM=MONTH implies SAS date ID values that measure time in days, and therefore the widths of MONTH intervals are measured in days. If FROM=DTMONTH is used instead, the values are assumed to represent a per-second rate, because the widths of DTMONTH intervals are measured in seconds.

Since TO=HOUR is specified, the output values are scaled as an average rate per second such that the product of each output value and the number of seconds in an hour (3600) is equal to the interpolated hourly total. A per-second rate is used because TO=HOUR implies SAS datetime ID values that measure time in seconds, and therefore the widths of HOUR intervals are measured in seconds.

Note that the scale assumed for OBSERVED=AVERAGE data is important only when converting between AVERAGE and another OBSERVED= option, or when converting between SAS date and SAS datetime ID values. When both the input and the output series are AVERAGE values, and the units for the ID values are not changed, the scale assumed does not matter.

For example, suppose you are converting gross domestic product (GDP) from quarterly to monthly. The GDP values are quarterly averages measured at annual rates. If you want the interpolated monthly values to also be measured at annual rates, then the option OBSERVED=AVERAGE works fine. Since there is no change of scale involved in this problem, it makes no difference that PROC EXPAND assumes daily rates instead of annual rates.

However, suppose you want to convert GDP from quarterly to monthly and also convert from annual rates to monthly rates, so that the result is total gross domestic product for the month. Using the option OBSERVED=(AVERAGE,TOTAL) would fail, because PROC EXPAND assumes the average is scaled to daily, not annual, rates.

One solution is to rescale to quarterly totals and treat the data as totals. You could use the options TRANSFORMIN=(/ 4) OBSERVED=TOTAL. Alternatively, you could treat the data as averages but first convert to daily rates. In this case you would use the options TRANSFORMIN=(/ 365.25) OBSERVED=AVERAGE.

Results of the OBSERVED=DERIVATIVE Option

If the first value of the OBSERVED= option is BEGINNING, TOTAL, or AVERAGE, the result is the derivative of the spline curve evaluated at first-of-period ID values for the output observation. For OBSERVED=(MIDDLE,DERIVATIVE), the derivative of the function is evaluated at output interval midpoints. For OBSERVED=(END,DERIVATIVE), the derivative is evaluated at end-of-period ID values.

Conversion Methods

The SPLINE Method

The SPLINE method fits a cubic spline curve to the input values. A cubic spline is a segmented function consisting of third-degree (cubic) polynomial functions joined together so that the whole curve and its first and second derivatives are continuous.

For point-in-time input data, the spline curve is constrained to pass through the given data points. For interval total or average data, the definite integrals of the spline over the input intervals are constrained to equal the given interval totals.

For boundary constraints, the *not-a-knot* condition is used by default. This means that the first two spline pieces are constrained to be part of the same cubic curve, as are the last two pieces. Thus the spline used by PROC EXPAND by default is not the same as the commonly used natural spline, which uses zero second-derivative endpoint constraints. While DeBoor (1981) recommends the *not-a-knot* constraint for cubic spline interpolation, using this constraint can sometimes produce anomalous results at the ends of the interpolated series. PROC EXPAND provides options to specify other endpoint constraints for spline curves.

To specify endpoint constraints, use the following form of the METHOD= option.

METHOD=SPLINE(*constraint* < , *constraint* >)

The first constraint specification applies to the lower endpoint, and the second constraint specification applies to the upper endpoint. If only one constraint is specified, it applies to both the lower and upper endpoints.

The *constraint* specifications can have the following values:

NOTAKNOT

specifies the not-a-knot constraint. This is the default.

NATURAL

specifies the *natural spline* constraint. The second derivative of the spline curve is constrained to be zero at the endpoint.

SLOPE= value

specifies the first derivative of the spline curve at the endpoint. The value specified can be any positive or negative number, but extreme values may produce unreasonable results.

CURVATURE= value

specifies the second derivative of the spline curve at the endpoint. The value specified can be any positive or negative number, but extreme values may produce unreasonable results. Specifying CURVATURE=0 is equivalent to specifying the NATURAL option.

For example, to specify natural spline interpolation, use the following option in the CONVERT or PROC EXPAND statement:

```
method=spline (natural)
```

For OBSERVED=BEGINNING, MIDDLE, and END series, the spline knots are placed at the beginning, middle, and end of each input interval, respectively. For total or averaged series, the spline knots are set at the start of the first interval, at the end of the last interval, and at the interval midpoints, except that there are no knots for the first two and last two midpoints.

Once the cubic spline curve is fit to the data, the spline is extended by adding linear segments at the beginning and end. These linear segments are used for extrapolating values beyond the range of the input data.

For point-in-time output series, the spline function is evaluated at the appropriate points. For interval total or average output series, the spline function is integrated over the output intervals.

The JOIN Method

The JOIN method fits a continuous curve to the data by connecting successive straight line segments. For point-in-time data, the JOIN method connects successive nonmissing input values with straight lines. For interval total or average data, interval midpoints are used as the break points, and ordinates are chosen so that the integrals of the piecewise linear curve agree with the input totals.

For point-in-time output series, the JOIN function is evaluated at the appropriate points. For interval total or average output series, the JOIN function is integrated over the output intervals.

The STEP Method

The STEP method fits a discontinuous piecewise constant curve. For point-in-time input data, the resulting step function is equal to the most recent input value. For interval total or average data, the step function is equal to the average value for the interval.

For point-in-time output series, the step function is evaluated at the appropriate points. For interval total or average output series, the step function is integrated over the output intervals.

The AGGREGATE Method

The AGGREGATE method performs simple aggregation of time series without interpolation of missing values.

If the input data are totals or averages, the results are the sums or averages, respectively, of the input values for observations corresponding to the output observations. That is, if either TOTAL or AVERAGE is specified for the OBSERVED= option, the METHOD=AGGREGATE result is the sum or mean of the input values corresponding to the output observation. For example, suppose METHOD=AGGREGATE, FROM=MONTH, and TO=YEAR are specified. For OBSERVED=TOTAL series, the result for each output year is the sum of the input values over the months of that year. If any input value is missing, the corresponding sum or mean is also a missing value.

If the input data are point-in-time values, the result value of each output observation equals the input value for a selected input observation determined by the OBSERVED= attribute. For example, suppose METHOD=AGGREGATE, FROM=MONTH, and TO=YEAR are specified. For

OBSERVED=BEGINNING series, January observations are selected as the annual values. For OBSERVED=MIDDLE series, July observations are selected as the annual values. For OBSERVED=END series, December observations are selected as the annual values. If the selected value is missing, the output annual value is missing.

The AGGREGATE method can be used only when the FROM= intervals are nested within the TO= intervals. For example, you can use METHOD=AGGREGATE when FROM=MONTH and TO=QTR because months are nested within quarters. You cannot use METHOD=AGGREGATE when FROM=WEEK and TO=QTR because weeks are not nested within quarters.

In addition, the AGGREGATE method cannot convert between point-in-time data and interval total or average data. Conversions between TOTAL and AVERAGE data are allowed, but conversions between BEGINNING, MIDDLE, and END are not.

Missing input values produce missing result values for METHOD=AGGREGATE. However, gaps in the sequence of input observations are not allowed. For example, if FROM=MONTH, you may have a missing value for a variable in an observation for a given February. But if an observation for January is followed by an observation for March, there is a gap in the data, and METHOD=AGGREGATE cannot be used.

When the AGGREGATE method is used, there is no interpolating curve, and therefore the EXTRAPOLATE option is not allowed.

Alternate methods for aggregating or accumulating time series data are supported by the TIMESERIES procedure. See Chapter 32, “[The TIMESERIES Procedure](#),” for more information.

METHOD=NONE

The option METHOD=NONE specifies that no interpolation be performed. This option is normally used in conjunction with the TRANSFORMIN= or TRANSFORMOUT= option.

When METHOD=NONE is specified, there is no difference between the TRANSFORMIN= and TRANSFORMOUT= options; if both are specified, the TRANSFORMIN= operations are performed first, followed by the TRANSFORMOUT= operations. TRANSFORM= can be used as an abbreviation for TRANSFORMIN=. METHOD=NONE cannot be used when frequency conversion is specified.

Transformation Operations

The operations that can be used in the TRANSFORMIN= and TRANSFORMOUT= options are shown in [Table 15.2](#). Operations are applied to each value of the series. Each value of the series is replaced by the result of the operation.

In [Table 15.2](#), x_t or x represents the value of the series at a particular time period t before the transformation is applied, y_t represents the value of the result series, and N represents the total number of observations.

The notation n_{optional} indicates that the argument n_{optional} is an optional integer; the default is 1. The notation *window* is used as the argument for the moving statistics operators, and it indicates that you can specify either a number of periods n (where n is an integer) or a list of n weights in parentheses. The notation *sequence*

is used as the argument for the sequence operators, and it indicates that you must specify a sequence of numbers. The notation s indicates the length of seasonality, and it is a required argument.

Table 15.2 Transformation Operations

Syntax	Result
$+ \text{ number}$	Adds the specified <i>number</i> : $x + \text{ number}$
$- \text{ number}$	Subtracts the specified <i>number</i> : $x - \text{ number}$
$* \text{ number}$	Multiplies by the specified <i>number</i> : $x * \text{ number}$
$/ \text{ number}$	Divides by the specified <i>number</i> : $x / \text{ number}$
ABS	Absolute value: $ x $
ADJUST	Indicates that the following moving window summation or product operator should be adjusted for window width
CD_I s	Classical decomposition irregular component
CD_S s	Classical decomposition seasonal component
CD_SA s	Classical decomposition seasonally adjusted series
CD_TC s	Classical decomposition trend-cycle component
CDA_I s	Classical decomposition (additive) irregular component
CDA_S s	Classical decomposition (additive) seasonal component
CDA_SA s	Classical decomposition (additive) seasonally adjusted series
CEIL	Smallest integer greater than or equal to x : $\text{ceil}(x)$
CMOAVE <i>window</i>	Centered moving average
CMOVCSS <i>window</i>	Centered moving corrected sum of squares
CMOVGMEAN <i>window</i>	Centered moving geometric mean for <i>window</i> = number of periods, n : $(\prod_{j=j_{\min}}^{j_{\max}} x_{t+j})^{1/n}$ $j_{\min} = -(n + n \bmod 2)/2 + 1$ $j_{\max} = (n - n \bmod 2)/2$ for <i>window</i> = weight list, w : $(\prod_{j=j_{\min}}^{j_{\max}} x_{t+j}^{w_{j-j_{\min}}})^{1/\sum_{j=0}^{n-1} w_j}$
CMOVMAX n	Centered moving maximum
CMOVMED n	Centered moving median
CMOVMIN n	Centered moving minimum
CMOVPROD <i>window</i>	Centered moving product for <i>window</i> = number of periods, n : $\prod_{j=j_{\min}}^{j_{\max}} x_{t+j}$ for <i>window</i> = weight list, w : $(\prod_{j=j_{\min}}^{j_{\max}} x_{t+j}^{w_{j-j_{\min}}})^{1/\sum_{j=0}^{n-1} w_j}$
CMOVRANGE n	Centered moving range
CMOVRANK n	Centered moving rank
CMOVSTD <i>window</i>	Centered moving standard deviation
CMOVSUM n	Centered moving sum
CMOVTVALUE <i>window</i>	Centered moving t value
CMOVUSS <i>window</i>	Centered moving uncorrected sum of squares
CMOVVAR <i>window</i>	Centered moving variance
CUAVE n_{optional}	Cumulative average
CUCSS n_{optional}	Cumulative corrected sum of squares
CUGMEAN n_{optional}	Cumulative geometric mean

Table 15.2 continued

Syntax	Result
CUMAX n_{optional}	Cumulative maximum
CUMED n_{optional}	Cumulative median
CUMIN n_{optional}	Cumulative minimum
CUPROD n_{optional}	Cumulative product
CURANK n_{optional}	Cumulative rank
CURANGE n_{optional}	Cumulative range
CUSTD n_{optional}	Cumulative standard deviation
CUSUM n_{optional}	Cumulative sum
CUTVALUE n_{optional}	Cumulative t value
CUUSS n_{optional}	Cumulative uncorrected sum of squares
CUVAR n_{optional}	Cumulative variance
DIF n_{optional}	Span n difference: $x_t - x_{t-n}$
EWMA $number$	Exponentially weighted moving average of x with smoothing weight $number$, where $0 < number < 1$: $y_t = number \cdot x_t + (1 - number)y_{t-1}$. This operation is also called simple exponential smoothing.
EXP	Exponential function: $\exp(x)$
FDIF d	Fractional difference with difference order d where $0 < d < 0.5$
FLOOR	Largest integer less than or equal to x : $\text{floor}(x)$
FSUM d	Fractional summation with summation order d where $0 < d < 0.5$
HP_T $lambda$	Hodrick-Prescott Filter trend component where $lambda$ is the nonnegative filter parameter
HP_C $lambda$	Hodrick-Prescott Filter cycle component where $lambda$ is the nonnegative filter parameter
ILOGIT	Inverse logistic function: $\frac{\exp(x)}{1+\exp(x)}$
LAG n_{optional}	Value of the series n periods earlier: x_{t-n}
LEAD n_{optional}	Value of the series n periods later: x_{t+n}
LOG	Natural logarithm: $\log(x)$
LOGIT	Logistic function: $\log(\frac{x}{1-x})$
MAX $number$	Maximum of x and $number$: $\max(x, number)$
MIN $number$	Minimum of x and $number$: $\min(x, number)$
> $number$	Missing value if $x \leq number$, else x
>= $number$	Missing value if $x < number$, else x
= $number$	Missing value if $x \neq number$, else x
^= $number$	Missing value if $x = number$, else x
< $number$	Missing value if $x \geq number$, else x
<= $number$	Missing value if $x > number$, else x
MOVAVE n	Backward moving average of n neighboring values: $\frac{1}{n} \sum_{j=0}^{n-1} x_{t-j}$
MOVAVE $window$	Backward weighted moving average of neighboring values: $(\sum_{j=1}^n w_j x_{t-n+j}) / (\sum_{j=1}^n w_j)$
MOVCSS $window$	Backward moving corrected sum of squares
MOVGMEAN $window$	Backward moving geometric mean

Table 15.2 continued

Syntax	Result
	for <i>window</i> = number of periods, <i>n</i> : $(\prod_{j=1}^n x_{t-n+j})^{1/n}$ for <i>window</i> = weight list, <i>w</i> : $(\prod_{j=1}^n x_{t-n+j}^{w_j})^{1/\sum_{j=1}^n w_j}$
MOVMAX <i>n</i>	Backward moving maximum
MOVMED <i>n</i>	Backward moving median
MOVMIN <i>n</i>	Backward moving minimum
MOVPROD <i>window</i>	Backward moving product for <i>window</i> = number of periods, <i>n</i> : $\prod_{j=1}^n x_{t-n+j}$ for <i>window</i> = weight list, <i>w</i> : $(\prod_{j=1}^n x_{t-n+j}^{w_j})^{1/\sum_{j=1}^n w_j}$
MOVRANGE <i>n</i>	Backward moving range
MOVRANK <i>n</i>	Backward moving rank
MOVSTD <i>window</i>	Backward moving standard deviation
MOVSUM <i>n</i>	Backward moving sum
MOVTVALUE <i>window</i>	Backward moving <i>t</i> value
MOVUSS <i>window</i>	Backward moving uncorrected sum of squares
MOVVAR <i>window</i>	Backward moving variance
MISSONLY <MEAN>	Indicates that the following moving time window statistic operator should replace only missing values with the moving statistic and should leave nonmissing values unchanged. If the option MEAN is specified, then missing values are replaced by the overall mean of the series.
NEG	Changes the sign: $-x$
NOMISS	Indicates that the following moving time window statistic operator should not allow missing values
PCTDIF <i>n</i>	Percent difference of the current value and lag <i>n</i>
PCTSUM <i>n</i>	Percent summation of the current value and cumulative sum <i>n</i> -lag periods
RATIO <i>n</i>	Ratio of current value to lag <i>n</i>
RECIPROCAL	Reciprocal: $1/x$
REVERSE	Reverses the series: x_{N-t}
SCALE <i>n</i> ₁ <i>n</i> ₂	Scales the series between <i>n</i> ₁ and <i>n</i> ₂
SEQADD <i>sequence</i>	Adds sequence values to series
SEQDIV <i>sequence</i>	Divides the series by sequence values
SEQMINUS <i>sequence</i>	Subtracts sequence values to series
SEQMULT <i>sequence</i>	Multiplies the series by sequence values
SET (<i>n</i> ₁ <i>n</i> ₂)	Sets all values of <i>n</i> ₁ to <i>n</i> ₂
SETEMBEDDED (<i>n</i> ₁ <i>n</i> ₂)	Sets embedded values of <i>n</i> ₁ to <i>n</i> ₂
SETLEFT (<i>n</i> ₁ <i>n</i> ₂)	Sets beginning values of <i>n</i> ₁ to <i>n</i> ₂
SETMISS <i>number</i>	Replaces missing values in the series with the number specified
SETRIGHT (<i>n</i> ₁ <i>n</i> ₂)	Sets ending values of <i>n</i> ₁ to <i>n</i> ₂

Table 15.2 *continued*

Syntax	Result
SIGN	-1, 0, or 1 as x is < 0 , equals 0, or > 0 , respectively
SQRT	Square root: \sqrt{x}
SQUARE	Square: x^2
SUM	Cumulative sum: $\sum_{j=1}^t x_j$
SUM n	Cumulative sum of multiples of n -period lags: $x_t + x_{t-n} + x_{t-2n} + \dots$
TRIM n	Sets x_t to missing a value if $t \leq n$ or $t \geq N - n + 1$
TRIMLEFT n	Sets x_t to missing a value if $t \leq n$
TRIMRIGHT n	Sets x_t to missing a value if $t \geq N - n + 1$

Moving Time Window Operators

Some operators compute statistics for a set of values within a moving time window; these are called *moving time window operators*. There are centered and backward versions of these operators.

The centered moving time window operators are CMOVE, CMOVCS, CMOVGM, CMOVMAX, CMOVMD, CMOVMI, CMOVPR, CMOVRA, CMOVRAK, CMOVSTD, CMOVSUM, CMOVTV, CMOVUS, and CMOVVAR. These operators compute statistics of the n values x_i for observations $t - (n + n \bmod 2)/2 + 1 \leq i \leq t + (n - n \bmod 2)/2$

The backward moving time window operators are MOVE, MOVCS, MOVGM, MOVMAX, MOVMD, MOVMI, MOVPR, MOVRA, MOVRAK, MOVSTD, MOVSUM, MOVTV, MOVUS, and MOVVAR. These operators compute statistics of the n values $x_t, x_{t-1}, \dots, x_{t-n+1}$.

All the moving time window operators accept an argument n specifying the number of periods to include in the time window. For example, the following statement computes a five-period backward moving average of X .

```
convert x=y / transformout=( move 5 );
```

In this example, the resulting transformation is

$$y_t = (x_t + x_{t-1} + x_{t-2} + x_{t-3} + x_{t-4})/5$$

The following statement computes a five-period centered moving average of X .

```
convert x=y / transformout=( cmove 5 );
```

In this example, the resulting transformation is

$$y_t = (x_{t-2} + x_{t-1} + x_t + x_{t+1} + x_{t+2})/5$$

If the window with a centered moving time window operator is not an odd number, one more lead value than lag value is included in the time window. For example, the result of the CMOVE 4 operator is

$$y_t = (x_{t-1} + x_t + x_{t+1} + x_{t+2})/4$$

You can compute a forward moving time window operation by combining a backward moving time window operator with the REVERSE operator. For example, the following statement computes a five-period forward moving average of X .

```
convert x=y / transformout=( reverse movave 5 reverse );
```

In this example, the resulting transformation is

$$y_t = (x_t + x_{t+1} + x_{t+2} + x_{t+3} + x_{t+4})/5$$

Some of the moving time window operators enable you to specify a list of weight values to compute weighted statistics. These are CMOVAVE, CMOVCSS, CMOVGMEAN, CMOVPROD, CMOVSTD, CMOVTVALUE, CMOVUSS, CMOVVAR, MOVAVE, MOVCSS, MOVGMEAN, MOVPROD, MOVSTD, MOVTVALUE, MOVUSS, and MOVVAR.

To specify a weighted moving time window operator, enter the weight values in parentheses after the operator name. The window width n is equal to the number of weights that you specify; do not specify n .

For example, the following statement computes a weighted five-period centered moving average of X .

```
convert x=y / transformout=( cmovave( .1 .2 .4 .2 .1 ) );
```

In this example, the resulting transformation is

$$y_t = .1x_{t-2} + .2x_{t-1} + .4x_t + .2x_{t+1} + .1x_{t+2}$$

The weight values must be greater than zero. If the weights do not sum to 1, the weights specified are divided by their sum to produce the weights used to compute the statistic.

A complete time window is not available at the beginning of the series. For the centered operators a complete window is also not available at the end of the series. The computation of the moving time window operators is adjusted for these boundary conditions as follows.

For backward moving window operators, the width of the time window is shortened at the beginning of the series. For example, the results of the MOVSUM 3 operator are

$$\begin{aligned} y_1 &= x_1 \\ y_2 &= x_1 + x_2 \\ y_3 &= x_1 + x_2 + x_3 \\ y_4 &= x_2 + x_3 + x_4 \\ y_5 &= x_3 + x_4 + x_5 \\ &\dots \end{aligned}$$

For centered moving window operators, the width of the time window is shortened at the beginning and the end of the series due to unavailable observations. For example, the results of the CMOVSUM 5 operator are

$$\begin{aligned}
 y_1 &= x_1 + x_2 + x_3 \\
 y_2 &= x_1 + x_2 + x_3 + x_4 \\
 y_3 &= x_1 + x_2 + x_3 + x_4 + x_5 \\
 y_4 &= x_2 + x_3 + x_4 + x_5 + x_6 \\
 &\dots \\
 y_{N-2} &= x_{N-4} + x_{N-3} + x_{N-2} + x_{N-1} + x_N \\
 y_{N-1} &= x_{N-3} + x_{N-2} + x_{N-1} + x_N \\
 y_N &= x_{N-2} + x_{N-1} + x_N
 \end{aligned}$$

For weighted moving time window operators, the weights for the unavailable or unused observations are ignored and the remaining weights renormalized to sum to 1.

Cumulative Statistics Operators

Some operators compute cumulative statistics for a set of current and previous values of the series. The cumulative statistics operators are CUAVE, CUCSS, CUMAX, CUMED, CUMIN, CURANGE, CUSTD, CUSUM, CUUSS, and CUVAR.

By default, the cumulative statistics operators compute the statistics from all previous values of the series, so that y_t is based on the set of values x_t, x_{t-1}, \dots, x_1 . For example, the following statement computes y_t as the cumulative sum of nonmissing x_i values for $i \leq t$.

```
convert x=y / transformout=( csum );
```

You can specify a lag increment argument n for the cumulative statistics operators. In this case, the statistic is computed from the current and every n^{th} previous value. When n is specified these operators compute statistics of the values $x_t, x_{t-n}, x_{t-2n}, \dots, x_{t-in}$ for $t - in > 0$.

For example, the following statement computes y_t as the cumulative sum of nonmissing x_i values for odd i when t is odd and for even i when t is even.

```
convert x=y / transformout=( csum 2 );
```

The results of this example are

$$\begin{aligned} y_1 &= x_1 \\ y_2 &= x_2 \\ y_3 &= x_1 + x_3 \\ y_4 &= x_2 + x_4 \\ y_5 &= x_1 + x_3 + x_5 \\ y_6 &= x_2 + x_4 + x_6 \\ &\dots \end{aligned}$$

Missing Values

You can truncate the length of the result series by using the TRIM, TRIMLEFT, and TRIMRIGHT operators to set values to missing at the beginning or end of the series.

You can use these functions to trim the results of moving time window operators so that the result series contains only values computed from a full width time window. For example, the following statements compute a centered five-period moving average of *X*, and they set to missing values at the ends of the series that are averages of fewer than five values.

```
convert x=y / transformout=( cmovave 5 trim 2 );
```

Normally, the moving time window and cumulative statistics operators ignore missing values and compute their results for the nonmissing values. When preceded by the NOMISS operator, these functions produce a missing result if any value within the time window is missing.

The NOMISS operator does not perform any calculations, but serves to modify the operation of the moving time window operator that follows it. The NOMISS operator has no effect unless it is followed by a moving time window operator.

For example, the following statement computes a five-period moving average of the variable *X* but produces a missing value when any of the five values are missing.

```
convert x=y / transformout=( nomiss movave 5 );
```

The following statement computes the cumulative sum of the variable *X* but produces a missing value for all periods after the first missing *X* value.

```
convert x=y / transformout=( nomiss cusum );
```

Similar to the NOMISS operator, the MISSONLY operator does not perform any calculations (unless followed by the MEAN option), but it serves to modify the operation of the moving time window operator that follows it. When preceded by the MISSONLY operator, these moving time window operators replace any missing values with the moving statistic and leave nonmissing values unchanged.

For example, the following statement replaces any missing values of the variable X with an exponentially weighted moving average of the past values of X and leaves nonmissing values unchanged. The missing values are interpolated using the specified exponentially weighted moving average. (This is also called simple exponential smoothing.)

```
convert x=y / transformout=( missonly ewma 0.3 );
```

The following statement replaces any missing values of the variable X with the overall mean of X .

```
convert x=y / transformout=( missonly mean );
```

You can use the SETMISS operator to replace missing values with a specified number. For example, the following statement replaces any missing values of the variable X with the number 8.77.

```
convert x=y / transformout=( setmiss 8.77 );
```

Classical Decomposition Operators

If x_t is a seasonal time series with s observations per season, *classical decomposition* methods “break down” the time series into four components: trend, cycle, seasonal, and irregular components. The trend and cycle components are often combined to form the trend-cycle component. There are two basic forms of classical decomposition: multiplicative and additive, which are shown below.

$$\begin{aligned}x_t &= TC_t S_t I_t \\x_t &= TC_t + S_t + I_t\end{aligned}$$

where

TC_t	is the trend-cycle component
S_t	is the seasonal component or seasonal factors that are periodic with period s and with mean one (multiplicative) or zero (additive)
I_t	is the irregular or random component that is assumed to have mean one (multiplicative) or zero (additive)

For multiplicative decomposition, all of the x_t values should be positive.

The CD_TC operator computes the trend-cycle component for both the multiplicative and additive models. When s is odd, this operator computes an s -period centered moving average as follows:

$$TC_t = \sum_{k=-\lfloor s/2 \rfloor}^{\lfloor s/2 \rfloor} x_{t+k} / s$$

For example, in the case where $s=5$, the CD_TC s operator

```
convert x=tc / transformout=( cd_tc 5 );
```

is equivalent to the following CMOVAVE operator:

```
convert x=tc / transformout=( cmovave 5 trim 2 );
```

When s is even, the CD_TC s operator computes the average of two adjacent s -period centered moving averages as follows:

$$TC_t = \sum_{k=-\lfloor s/2 \rfloor}^{\lfloor s/2 \rfloor - 1} (x_{t+k} + x_{t+1+k}) / 2s$$

For example, in the case where $s=12$, the CD_TC s operator

```
convert x=tc / transformout=( cd_tc 12 );
```

is equivalent to the following CMOVAVE operator:

```
convert x=tc / transformout=(cmovave 12 movave 2 trim 6);
```

The CD_S and CDA_S operators compute the seasonal components for the multiplicative and additive models, respectively. First, the trend-cycle component is computed as shown previously. Second, the seasonal-irregular component is computed by $SI_t = x_t / TC_t$ for the multiplicative model and by $SI_t = x_t - TC_t$ for the additive model. The seasonal component is obtained by averaging the seasonal-irregular component for each season.

$$S_{k+js} = \sum_{t=k \bmod s} \frac{SI_t}{n/s}$$

where $0 \leq j \leq n/s$ and $1 \leq k \leq s$. The seasonal components are normalized to sum to one (multiplicative) or zero (additive).

The CD_I and CDA_I operators compute the irregular component for the multiplicative and additive models respectively. First, the seasonal component is computed as shown previously. Next, the irregular component is determined from the seasonal-irregular and seasonal components as appropriate.

$$\begin{aligned} I_t &= SI_t / S_t \\ I_t &= SI_t - S_t \end{aligned}$$

The CD_SA and CDA_SA operators compute the seasonally adjusted time series for the multiplicative and additive models, respectively. After decomposition, the original time series can be seasonally adjusted as appropriate.

$$\begin{aligned} \tilde{x}_t &= x_t / S_t = TC_t I_t \\ \tilde{x}_t &= x_t - S_t = TC_t + I_t \end{aligned}$$

The following statements compute all the multiplicative classical decomposition components for the variable X for $s=12$.

```
convert x=tc / transformout=( cd_tc 12 );
convert x=s  / transformout=( cd_s  12 );
convert x=i  / transformout=( cd_i  12 );
convert x=sa / transformout=( cd_sa 12 );
```

The following statements compute all the additive classical decomposition components for the variable X for $s=4$.

```
convert x=tc / transformout=( cda_tc  4 );
convert x=s  / transformout=( cda_s   4 );
convert x=i  / transformout=( cda_i   4 );
convert x=sa / transformout=( cda_sa  4 );
```

The X12 and X11 procedures provides other methods for seasonal decomposition. See Chapter 37, “The X12 Procedure,” and Chapter 36, “The X11 Procedure.”

Fractional Operators

For fractional operators, the parameter, d , represents the order of fractional differencing. Fractional summation is the inverse operation of fractional differencing.

Examples of Usage

Suppose that X is a fractionally integrated time series variable of order $d=0.25$. Fractionally differencing X forms a time series variable Y which is not integrated.

```
convert x=y / transformout=(fdif 0.25);
```

Suppose that Z is a non-integrated time series variable. Fractionally summing Z forms a time series W which is fractionally integrated of order $d = 0.25$.

```
convert z=w / transformout=(fsum 0.25);
```

Moving Rank Operators

For the rank operators, the ranks are computed based on the current value with respect to the cumulative, centered, or moving window values. If the current value is missing, the transformed current value is set to missing. If the NOMISS option was previously specified and if any missing values are present in the moving window, the transformed current value is set to missing. Otherwise, redundant values from the moving window are removed and the rank of the current value is computed among the unique values of the moving window.

Examples of Usage

The trades of a particular security are recorded for each weekday in a variable named PRICE. Given the historical daily trades, the ranking of the price of this security for each trading day, considering its entire past history, can be computed as follows:

```
convert price=history / transformout=( curank );
```

The ranking of the price of this security for each trading day considering the previous week's history can be computed as follows:

```
convert price=lastweek / transformout=( movrank 5 );
```

The ranking of the price of this security for each trading day considering the previous two week's history can be computed as follows:

```
convert price=twoweek / transformout=( movrank 10 );
```

Moving Product and Geometric Mean Operators

For the product and geometric mean operators, the current transformed value is computed based on the (weighted) product of the cumulative, centered, or moving window values. If missing values are present in the moving window and the NOMISS operator is previously specified, the current transformed value is set to missing. Otherwise, the current transformed value is set to the product of the nonmissing values within the moving window. If a geometric mean operator is specified for a window of size n , the n th root of the product is taken. In cases where weights are specified explicitly, both the product and geometric mean operators normalize these exponents so that they sum to one.

Examples of Usage

The interest rates for a savings account are recorded for each month in the data set variable RATES. The cumulative interest rate for each month considering the entire account past history can be computed as follows:

```
convert rates=history / transformout=( + 1 cuprod - 1 );
```

The interest rate for each quarter considering the previous quarter's history can be computed as follows:

```
convert rates=lastqtr / transformout=( + 1 movprod 3 - 1 );
```

The average interest rate for the previous quarter's history can be computed as follows:

```
convert rates=lastqtr / transformout=( + 1 movprod (1 1 1) - 1 );
```

Sequence Operators

For the sequence operators, the sequence values are used to compute the transformed values from the original values in a sequential fashion. You can add to or subtract from the original series or you can multiply or divide by the sequence values. The first sequence value is applied to the first observation of the series, the second sequence value is applied to the second observation of the series, and so on until the end of the sequence is reached. At this point, the first sequence value is applied to the next observation of the series and the second sequence value on the next observation and so on.

Let v_1, \dots, v_m be the sequence values and let $x_t, t = 1, \dots, N$, be the original time series. The transformed series, y_t , is computed as follows:

$$\begin{aligned}
 y_1 &= x_1 \text{ op } v_1 \\
 y_2 &= x_2 \text{ op } v_2 \\
 &\dots \\
 y_m &= x_m \text{ op } v_m \\
 y_{m+1} &= x_{m+1} \text{ op } v_1 \\
 y_{m+2} &= x_{m+2} \text{ op } v_2 \\
 &\dots \\
 y_{2m} &= x_{2m} \text{ op } v_m \\
 y_{2m+1} &= x_{2m+1} \text{ op } v_1 \\
 y_{2m+2} &= x_{2m+2} \text{ op } v_2 \\
 &\dots
 \end{aligned}$$

where $\text{op} = +, -, *, \text{ or } /$.

Examples of Usage

The multiplicative seasonal indices are 0.9, 1.2, 0.8, and 1.1 for the four quarters. Let SEASADJ be a quarterly time series variable that has been seasonally adjusted in a multiplicative fashion. To restore the seasonality to SEASADJ use the following transformation:

```
convert seasadj=seasonal /
transformout=(seqmult (0.9 1.2 0.8 1.1));
```

The additive seasonal indices are 4.4, -1.1, -2.1, and -1.2 for the four quarters. Let SEASADJ be a quarterly time series variable that has been seasonally adjusted in additive fashion. To restore the seasonality to SEASADJ use the following transformation:

```
convert seasadj=seasonal /
transformout=(seqadd (4.4 -1.1 -2.1 -1.2));
```

Set Operators

For the set operators, the first parameter, n_1 , represents the value to be replaced and the second parameter, n_2 , represents the replacement value. The replacement can be localized to the beginning, middle, or end of the series.

Examples of Usage

Suppose that a store opened recently and that the sales history is stored in a database that does not recognize missing values. Even though demand may have existed prior to the stores opening, this database assigns the value of zero. Modeling the sales history may be problematic because the sales history is mostly zero. To compensate for this deficiency, the leading zero values should be set to missing with the remaining zero values unchanged (representing no demand).

```
convert sales=demand / transformout=(setleft (0 .));
```

Likewise, suppose a store is closed recently. The demand might still be present; hence, a recorded value of zero does not accurately reflect actual demand.

```
convert sales=demand / transformout=(setright (0 .));
```

Scale Operator

For the scale operator, the first parameter, n_1 , represents the value associated with the minimum value (x_{min}) and the second parameter, n_2 , represents the value associated with the maximum value (x_{max}) of the original series (x_t). The scale operator recales the original data to be between the parameters n_1 and n_2 as follows:

$$y_t = ((n_2 - n_1) / (x_{max} - x_{min}))(x_t - x_{min}) + n_1$$

Examples of Usage

Suppose that two new product sales histories are stored in variables X and Y and you wish to determine their adoption rates. In order to compare their adoption histories the variables must be scaled for comparison.

```
convert x=w / transformout=(scale 0 1);
convert y=z / transformout=(scale 0 1);
```

Adjust Operator

For the moving summation and product window operators, the window widths at the beginning and end of the series are smaller than those in the middle of the series. Likewise, if there are embedded missing values, the window width is smaller than specified. When preceded by the ADJUST operator, the moving summation (MOVSUM CMOVSUM) and moving product operators (MOVPROD CMOVPROD) are adjusted by the window width.

For example, suppose the variable X has 10 values and the moving summation operator of width 3 is applied to X to create the variable Y with window width adjustment and the variable Z without adjustment.

```
convert x=y / transformout=(adjust movsum 3);
convert x=z / transformout=(movsum 3);
```

The above transformations result in the following relationship between Y and Z : $y_1 = 3z_1$, $y_2 = \frac{3}{2}z_2$, $y_t = z_t$ for $t > 2$ because the first two window widths are smaller than 3.

For example, suppose the variable X has 10 values and the moving multiplicative operator of width 3 is applied to X to create the variable Y with window width adjustment and the variable Z without adjustment.

```
convert x=y / transformout=(adjust movprod 3);
convert x=z / transformout=(movprod 3);
```

The above transformation result in the following: $y_1 = z_1^3$, $y_2 = z_2^{3/2}$, $y_t = z_t$ for $t > 2$ because the first two window widths are smaller than 3.

Moving T-Value Operators

The moving t -value operators (CUTVALUE, MOVTVALUE, CMOVTVALUE) compute the t -value of the cumulative series or moving window. They can be viewed as combinations of the moving average (CUAVE, MOVAVE, CMOVAVE) and the moving standard deviation (CUSTD, MOVSTD, CMOVSTD), respectively.

Percent Operators

The percentage operators compute the percent summation and the percent difference of the current value and the lag(n). The percent summation operator (PCTSUM) computes $y_t = 100x_t/\text{cusum}(x_{t-n})$. If any of the values of the preceding equation are missing or the cumulative summation is zero, the result is set to missing. The percent difference operator (PCTDIF) computes $y_t = 100(x_t - x_{t-n})/x_{t-n}$. If any of the values of the preceding equation are missing or the lag value is zero, the result is set to missing.

For example, suppose variable X contains the series. The percent summation of lag 4 is applied to X to create the variable Y . The percent difference of lag 4 is applied to X to create the variable Z .

```
convert x=y / transformout=(pctsum 4);
convert x=z / transformout=(pctdif 4);
```

Ratio Operators

The ratio operator computes the ratio of the current value and the lag(n) value. The ratio operator (RATIO) computes $y_t = x_t/x_{t-n}$. If any of the values of the preceding equation are missing or the lag value is zero, the result is set to missing.

For example, suppose variable X contains the series. The ratio of the current value and the lag 4 value of X assigned to the variable Y . The percent ratio of the current value and lag 4 value of X is assigned to the variable Z .

```
convert x=y / transformout=(ratio 4);
convert x=z / transformout=(ratio 4 * 100);
```

OUT= Data Set

The OUT= output data set contains the following variables:

- the BY variables, if any
- an ID variable that identifies the time period for each output observation
- the result variables
- if no frequency conversion is performed (so that there is one output observation corresponding to each input observation), all the other variables in the input data set are copied to the output data set

The ID variable in the output data set is named as follows:

- If an ID statement is used, the new ID variable has the same name as the variable used in the ID statement.
- If no ID statement is used, but the FROM= option is used, then the name of the ID variable is either DATE or DATETIME, depending on whether the TO= option indicates SAS date or SAS datetime values.
- If neither an ID statement nor the TO= option is used, the ID variable is named TIME.

OUTEST= Data Set

The OUTEST= data set contains the coefficients of the spline curves fit to the input series. The OUTEST= data set is of interest if you want to verify the interpolating curve PROC EXPAND uses, or if you want to use this function in another context, (for example, in a SAS/IML program).

The OUTEST= data set contains the following variables:

- the BY variables, if any
- VARNAME, a character variable containing the name of the input variable to which the coefficients apply

- **METHOD**, a character variable containing the value of the **METHOD=** option used to fit the series
- **OBSERVED**, a character variable containing the first letter of the **OBSERVED=** option name for the input series
- the ID variable that contains the lower breakpoint (or “knot”) of the spline segment to which the coefficients apply. The ID variable has the same name as the variable used in the ID statement. If an ID statement is not used, but the **FROM=** option is used, then the name of the ID variable is **DATE** or **DATETIME**, depending on whether the **FROM=** option indicates SAS date or SAS datetime values. If neither an ID statement nor the **FROM=** option is used, the ID variable is named **TIME**.
- **CONSTANT**, the constant coefficient for the spline segment
- **LINEAR**, the linear coefficient for the spline segment
- **QUAD**, the quadratic coefficient for the spline segment
- **CUBIC**, the cubic coefficient for the spline segment

For each **BY** group, the **OUTEST=** data set contains observations for each polynomial segment of the spline curve fit to each input series. To obtain the observations defining the spline curve used for a series, select the observations where the value of **VARNAME** equals the name of the series.

The observations for a series in the **OUTEST=** data set encode the spline function fit to the series as follows. Let a_i , b_i , c_i , and d_i be the values of the variables **CUBIC**, **QUAD**, **LINEAR**, and **CONSTANT**, respectively, for the i th observation for the series. Let x_i be the value of the ID variable for the i th observation for the series. Let n be the number of observations in the **OUTEST=** data set for the series. The value of the spline function evaluated at a point x is

$$f(x) = a_i(x - x_i)^3 + b_i(x - x_i)^2 + c_i(x - x_i) + d_i$$

where the segment number i is selected as follows:

$$i = \begin{cases} i & x_i \leq x < x_{i+1}, 1 \leq i < n \\ 1 & x < x_1 \\ n & x \geq x_n \end{cases}$$

In other words, if x is between the first and last ID values ($x_1 \leq x < x_n$), use the observation from the **OUTEST=** data set with the largest ID value less than or equal to x . If x is less than the first ID value x_1 , then $i = 1$. If x is greater than or equal to the last ID value ($x \geq x_n$), then $i = n$.

For **METHOD=JOIN**, the curve is a linear spline, and the values of **CUBIC** and **QUAD** are 0. For **METHOD=STEP**, the curve is a constant spline, and the values of **CUBIC**, **QUAD**, and **LINEAR** are 0. For **METHOD=AGGREGATE**, no coefficients are output.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the EXPAND procedure. To request these graphs, you must specify the **PLOTS=** option in the PROC EXPAND statement.

ODS Graph Names

PROC EXPAND assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when using ODS. The names are listed in [Table 15.3](#).

Table 15.3 ODS Graphics Produced by PROC EXPAND

ODS Graph Name	Plot Description	PLOTS= Options
ConvertedSeriesPlot	Converted Series Plot	CONVERTED OUTPUT ALL
CrossInputSeriesPlot	Cross Input Series Plot	CROSSINPUT
CrossOutputSeriesPlot	Cross Output Series Plot	CROSSOUTPUT
InputSeriesPlot	Input Series Plot	INPUT JOINTINPUT ALL
JointInputSeriesPlot	Joint Input Series Plot	JOINTINPUT
JointOutputSeriesPlot	Joint Output Series Plot	JOINTOUTPUT
OutputSeriesPlot	Output Series Plot	SERIESOUTPUT
TransformedInputSeriesPlot	Transformed Input Series Plot	TRANSFORMIN OUTPUT ALL
TransformedOutputSeriesPlot	Transformed Output Series Plot	TRANSFORMOUT OUTPUT ALL

PLOTS= Option Details

Some plots are produced for a series only if the relevant options are also specified. For example, if **PLOTS=TRANSFORMIN** is specified, then the **TRANSFORMIN** plot is not produced for a variable unless the **TRANSFORMIN=** option is specified in a **CONVERT** statement for that variable. The **PLOTS=TRANSFORMIN** option plots the series after the input transformation (**TRANSFORMIN=** option) is applied.

The **PLOTS=CONVERTED** option plots the series after the input transformation (**TRANSFORMIN=** option) is applied and after frequency conversion (**METHOD=** option). If there is no frequency conversion for an output variable, the converted series plot is not produced.

The **PLOTS=TRANSFORMOUT** option plots the series after the output transformation (**TRANSFORMOUT=** option) is applied. If the **TRANSFORMOUT=** option is not specified in the **CONVERT** statement for an output variable, the output transformation plot is not produced.

The `PLOTS=OUTPUT` option plots the series after it has undergone input transformation (`TRANSFORMIN=` option), frequency conversion (`METHOD=` option), and output transformation (`TRANSFORMOUT=` option) if these `CONVERT` statement options were specified.

Cross and Joint Plots

The `PLOTS=` option values `CROSSINPUT` and `CROSSOUTPUT` produce graphs that overlay plots of two series by using two Y axes and with each of the two plots shown at a separate scale. These plots are called cross plots.

The `PLOTS=` option values `JOINTINPUT` and `JOINTOUTPUT` produce graphs that overlay plots of two series by using a single Y axis and with both of the plots shown on the same scale. These plots are called joint plots. The joint graphics options (`PLOTS=JOINTINPUT` or `PLOTS=JOINTOUTPUT`) plot the (input or converted) series and the transformed series on the same scale; therefore if the transformation changes, the range of the series these plots might be hard to visualize.

The `PLOTS=CROSSINPUT` option plots both the input series and the series after the input transformation (`TRANSFORMIN=` option) is applied. The left vertical axis refers to the input series, while the right vertical axis refers to the series after the transformation. If the `TRANSFORMIN=` option is not specified in the `CONVERT` statement for an output variable, then the cross input plot is not produced for that variable.

The `PLOTS=JOINTINPUT` option jointly plots both the input series and the series after the input transformation (`TRANSFORMIN=` option) is applied. If the `TRANSFORMIN=` option is not specified in the `CONVERT` statement for an output variable, then the joint input plot is not produced for that variable.

The `PLOTS=CROSSOUTPUT` option plots both the converted series and the converted series after the output transformation (`TRANSFORMOUT=` option) is applied. The left vertical axis refers to the input series, while the right vertical axis refers to the series after the transformation. If the `TRANSFORMOUT=` option is not specified in the `CONVERT` statement for an output variable, then the cross output plot is not produced for that variable.

The `PLOTS=JOINTOUTPUT` option jointly plots both the converted series and the converted series after the output transformation (`TRANSFORMOUT=` option) is applied. If the `TRANSFORMOUT=` option is not specified in the `CONVERT` statement for an output variable, then the joint output plot is not produced for that variable.

Requesting All Plots

The `PLOTS=ALL` option is a convenient way to specify all the plots except the `OUTPUT` plots and the joint and cross plots. The option `PLOTS=(ALL OUTPUT JOINTINPUT JOINTOUTPUT CROSSINPUT CROSSOUTPUT)` requests that all possible plots be produced.

Examples: EXPAND Procedure

Example 15.1: Combining Monthly and Quarterly Data

This example combines monthly and quarterly data sets by interpolating monthly values for the quarterly series. The series are extracted from two small sample data sets stored in the SASHELP library. These data sets were contributed by Citicorp Data Base services and contain selected U.S. macro economic series.

The quarterly series gross domestic product (GDP) and implicit price deflator (GD) are extracted from SASHELP.CITIQTR. The monthly series industrial production index (IP) and unemployment rate (LHUR) are extracted from SASHELP.CITIMON. Only observations for the years 1990 and 1991 are selected. PROC EXPAND is then used to interpolate monthly estimates for the quarterly series, and the interpolated series are merged with the monthly data.

The following statements extract and print the quarterly data, shown in [Output 15.1.1](#).

```
data qtrly;
    set sashelp.citiqtr;
    where date >= '1jan1990'd &
           date < '1jan1992'd ;
    keep date gdp gd;
run;

title "Quarterly Data";
proc print data=qtrly;
run;
```

Output 15.1.1 Quarterly Data Set

Quarterly Data				
Obs	DATE	GD	GDP	
1	1990:1	111.100	5422.40	
2	1990:2	112.300	5504.70	
3	1990:3	113.600	5570.50	
4	1990:4	114.500	5557.50	
5	1991:1	115.900	5589.00	
6	1991:2	116.800	5652.60	
7	1991:3	117.400	5709.20	
8	1991:4	.	5736.60	

The following statements extract and print the monthly data, shown in [Output 15.1.2](#).

```
data monthly;
    set sashelp.citimom;
    where date >= '1jan1990'd &
           date < '1jan1992'd ;
```

```

keep date ip lhur;
run;

title "Monthly Data";
proc print data=monthly;
run;

```

Output 15.1.2 Monthly Data Set

Monthly Data				
Obs	DATE	IP	LHUR	
1	JAN1990	107.500	5.30000	
2	FEB1990	108.500	5.30000	
3	MAR1990	108.900	5.20000	
4	APR1990	108.800	5.40000	
5	MAY1990	109.400	5.30000	
6	JUN1990	110.100	5.20000	
7	JUL1990	110.400	5.40000	
8	AUG1990	110.500	5.60000	
9	SEP1990	110.600	5.70000	
10	OCT1990	109.900	5.80000	
11	NOV1990	108.300	6.00000	
12	DEC1990	107.200	6.10000	
13	JAN1991	106.600	6.20000	
14	FEB1991	105.700	6.50000	
15	MAR1991	105.000	6.70000	
16	APR1991	105.500	6.60000	
17	MAY1991	106.400	6.80000	
18	JUN1991	107.300	6.90000	
19	JUL1991	108.100	6.80000	
20	AUG1991	108.000	6.80000	
21	SEP1991	108.400	6.80000	
22	OCT1991	108.200	6.90000	
23	NOV1991	108.000	6.90000	
24	DEC1991	107.800	7.10000	

The following statements interpolate monthly estimates for the quarterly series and merge the interpolated series with the monthly data. The resulting combined data set is then printed, as shown in [Output 15.1.3](#).

```

proc expand data=qtrly out=temp from=qtr to=month;
  convert gdp gd / observed=average;
  id date;
run;

data combined;
  merge monthly temp;
  by date;
run;

title "Combined Data Set";
proc print data=combined;
run;

```

Output 15.1.3 Combined Data Set

Combined Data Set					
Obs	DATE	IP	LHUR	GDP	GD
1	JAN1990	107.500	5.30000	5409.69	110.879
2	FEB1990	108.500	5.30000	5417.67	111.048
3	MAR1990	108.900	5.20000	5439.39	111.367
4	APR1990	108.800	5.40000	5470.58	111.802
5	MAY1990	109.400	5.30000	5505.35	112.297
6	JUN1990	110.100	5.20000	5538.14	112.801
7	JUL1990	110.400	5.40000	5563.38	113.264
8	AUG1990	110.500	5.60000	5575.69	113.641
9	SEP1990	110.600	5.70000	5572.49	113.905
10	OCT1990	109.900	5.80000	5561.64	114.139
11	NOV1990	108.300	6.00000	5553.83	114.451
12	DEC1990	107.200	6.10000	5556.92	114.909
13	JAN1991	106.600	6.20000	5570.06	115.452
14	FEB1991	105.700	6.50000	5588.18	115.937
15	MAR1991	105.000	6.70000	5608.68	116.314
16	APR1991	105.500	6.60000	5630.81	116.600
17	MAY1991	106.400	6.80000	5652.92	116.812
18	JUN1991	107.300	6.90000	5674.06	116.988
19	JUL1991	108.100	6.80000	5693.43	117.164
20	AUG1991	108.000	6.80000	5710.54	117.380
21	SEP1991	108.400	6.80000	5724.11	117.665
22	OCT1991	108.200	6.90000	5733.65	.
23	NOV1991	108.000	6.90000	5738.46	.
24	DEC1991	107.800	7.10000	5737.75	.

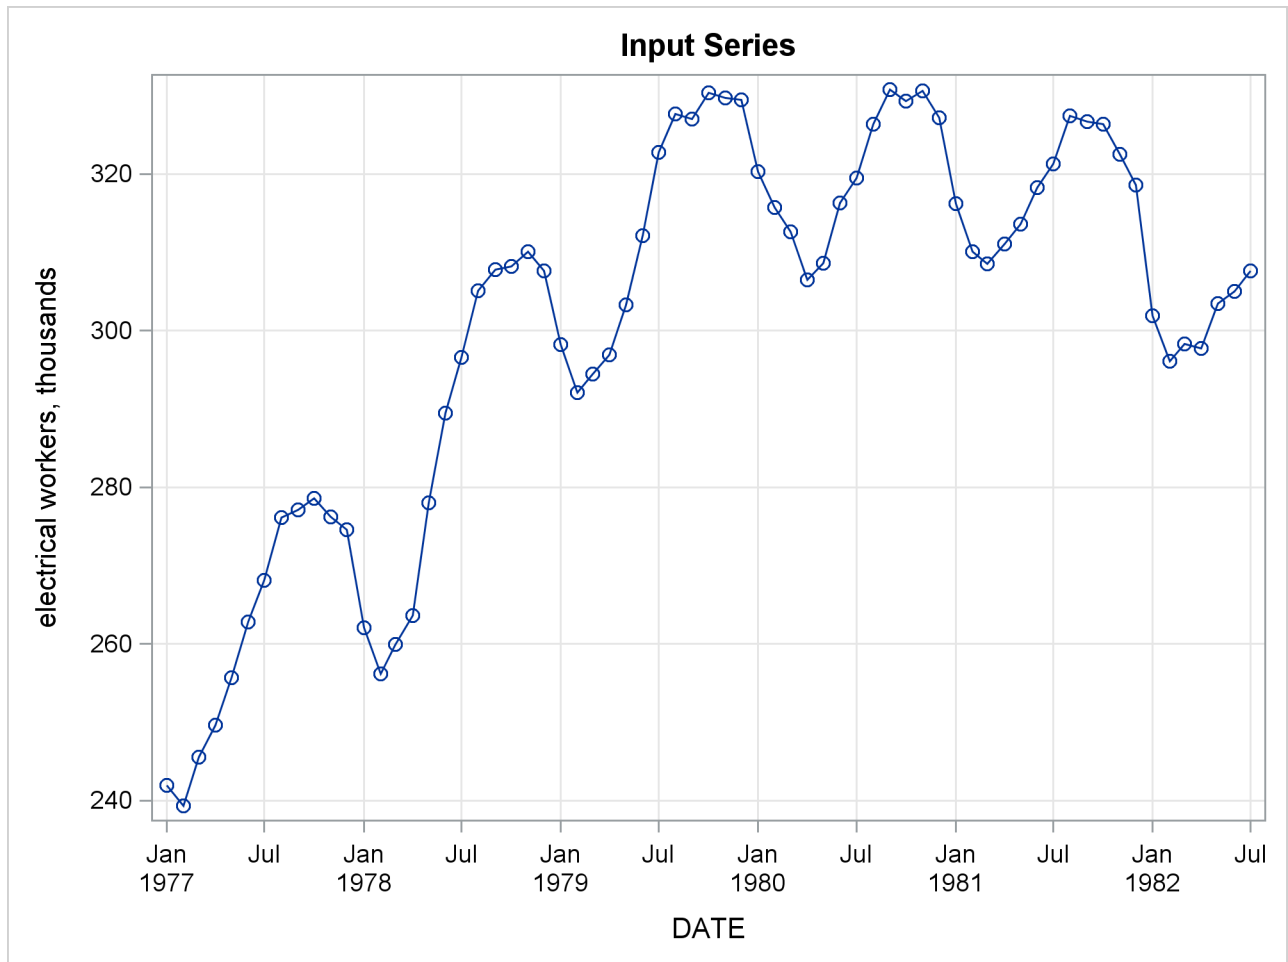
Example 15.2: Illustration of ODS Graphics

This example illustrates the use of ODS graphics with PROC EXPAND.

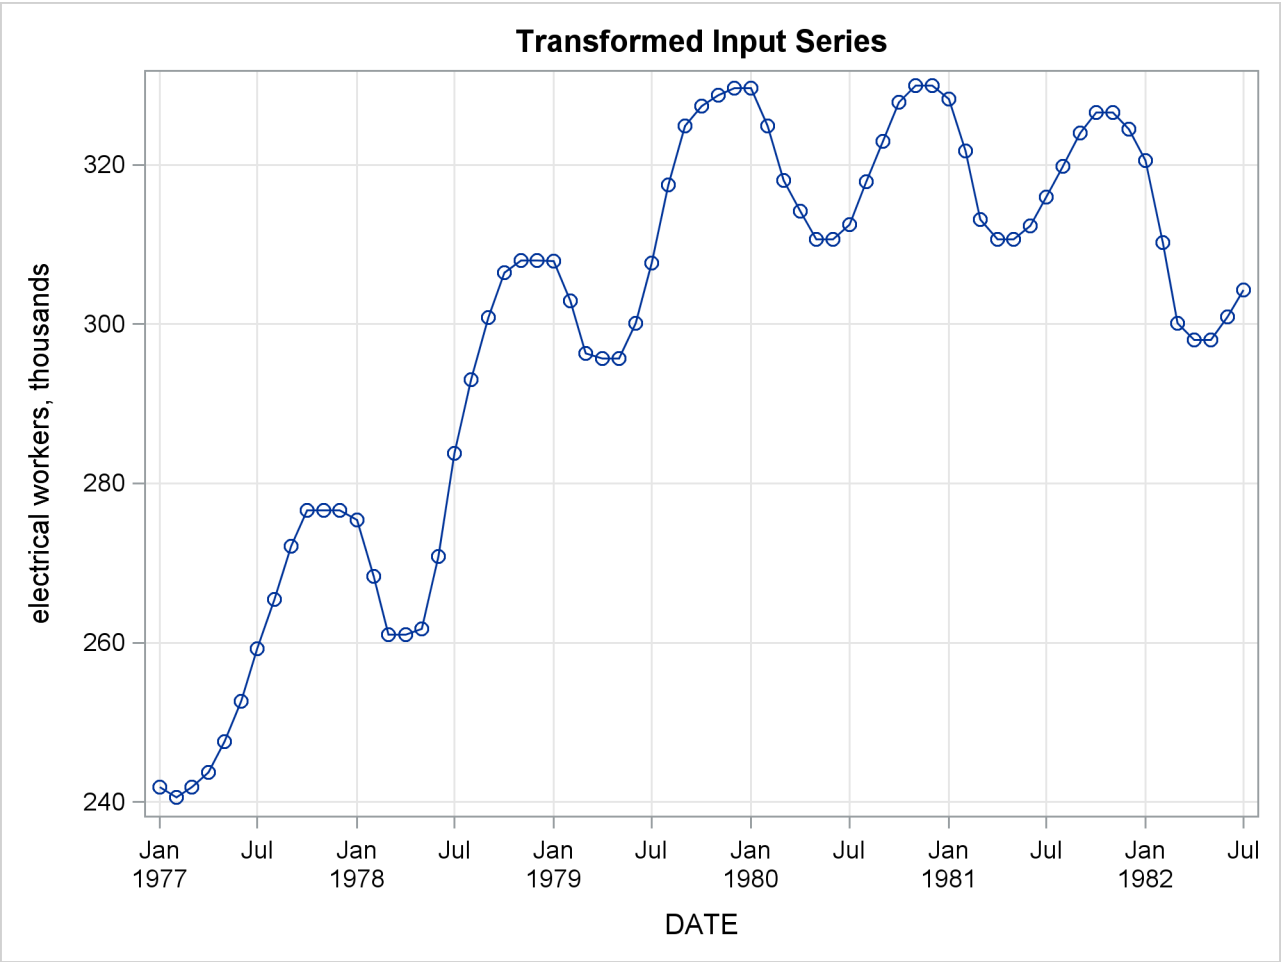
The graphical displays are requested by specifying the **PLOTS=** option in the PROC EXPAND statement. For information about the graphics available in the EXPAND procedure, see the section “[ODS Graphics](#)” on page 829.

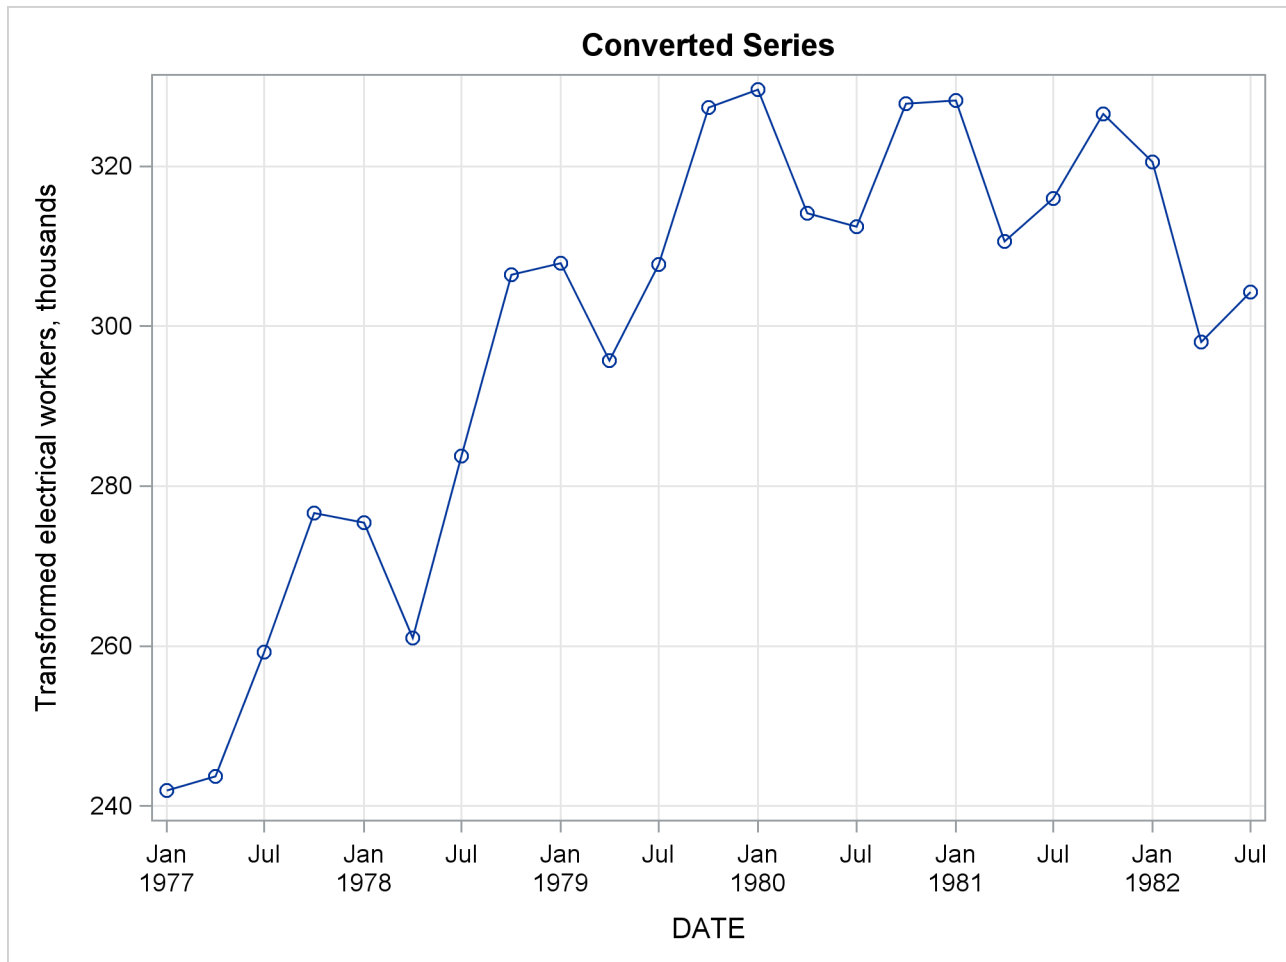
The following statements utilize the SASHELP.WORKERS data set to convert the time series of electrical workers from monthly to quarterly frequency and display ODS graphics plots. The **PLOTS=ALL** option is specified to request the plots of the input series, the transformed input series, the converted series, and the transformed output series. [Figure 15.2.1](#) through [Figure 15.2.4](#) show these plots.

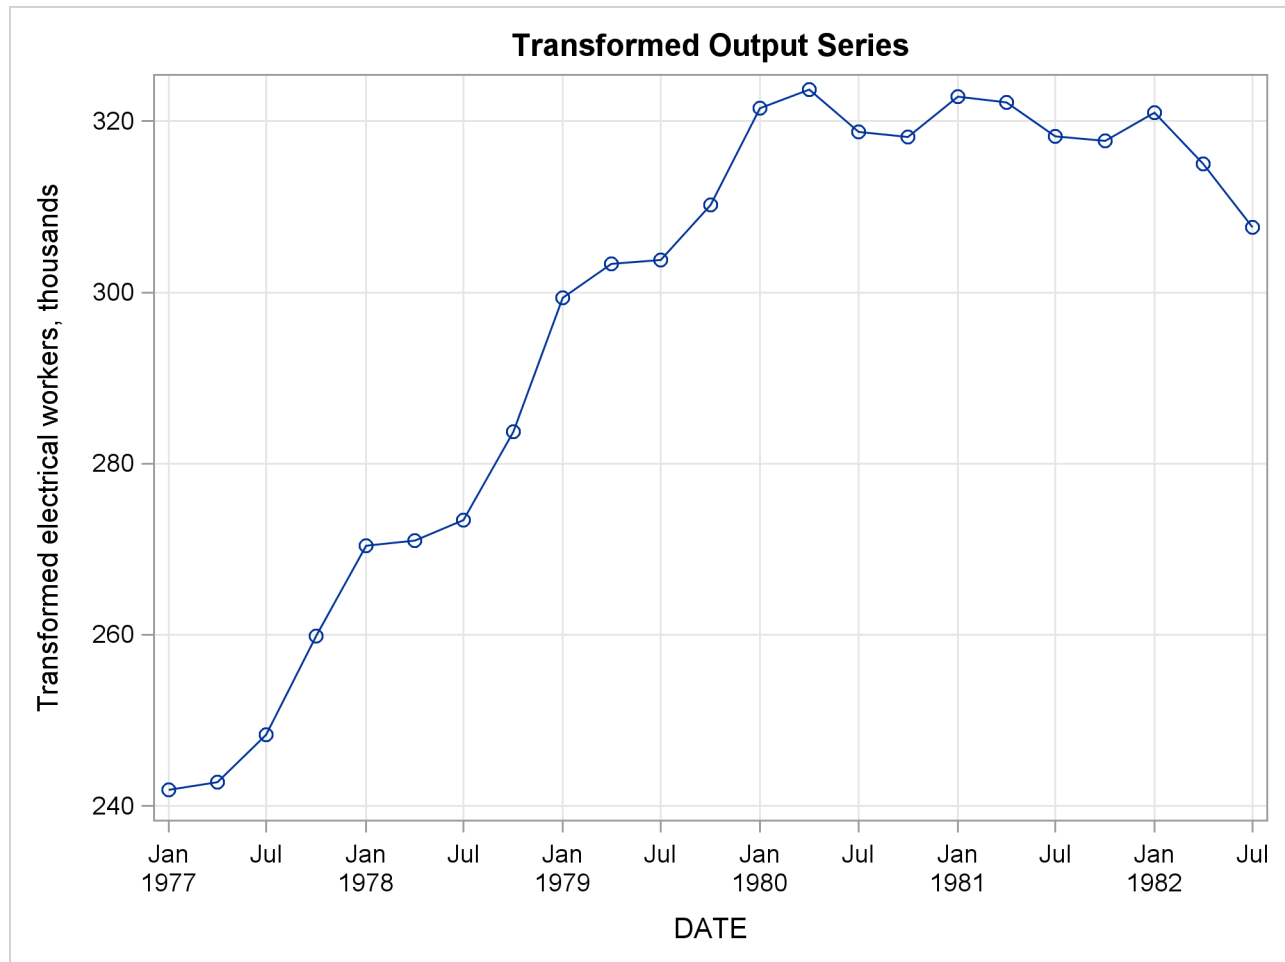
```
proc expand data=sashelp.workers out=out
    from=month to=qtr
    plots=all;
    id date;
    convert electric=eout / method=spline
        transformin=(movmed 4)
        transformout=(movave 3);
run;
```

Output 15.2.1 Input Series Plot

Output 15.2.2 Transformed Input Series Plot—Four-Period Moving Median



Output 15.2.3 Converted Plot of Transformed Input Series

Output 15.2.4 Transformed Output Series Plot—Three-Period Moving Average

Example 15.3: Interpolating Irregular Observations

This example shows the interpolation of a series of values measured at irregular points in time. The data are hypothetical. Assume that a series of randomly timed quality control inspections are made and defect rates for a process are measured. The problem is to produce two reports: estimates of monthly average defect rates for the months within the period covered by the samples, and a plot of the interpolated defect rate curve over time.

The following statements read and print the input data, as shown in [Output 15.3.1](#).

```
data samples;
  input date : date9. defects @@;
  label defects = "Defects per 1000 Units";
  format date date9.;
datalines;

... more lines ...
```



```

title "Sampled Defect Rates";
proc print data=samples;
run;

```

Output 15.3.1 Measured Defect Rates

Sampled Defect Rates		
Obs	date	defects
1	13JAN1992	55
2	27JAN1992	73
3	19FEB1992	84
4	08MAR1992	69
5	27MAR1992	66
6	05APR1992	77
7	29APR1992	63
8	11MAY1992	81
9	25MAY1992	89
10	07JUN1992	94
11	23JUN1992	105
12	11JUL1992	97
13	15AUG1992	112
14	29AUG1992	89
15	10SEP1992	77
16	27SEP1992	82

To compute the monthly estimates, use PROC EXPAND with the TO=MONTH option and specify OBSERVED=(BEGINNING,AVERAGE). The following statements interpolate the monthly estimates.

```

proc expand data=samples
    out=monthly
    to=month
    plots=(input output);
  id date;
  convert defects / observed=(beginning,average);
run;

```

The following PROC PRINT step prints the results, as shown in [Output 15.3.2](#).

```

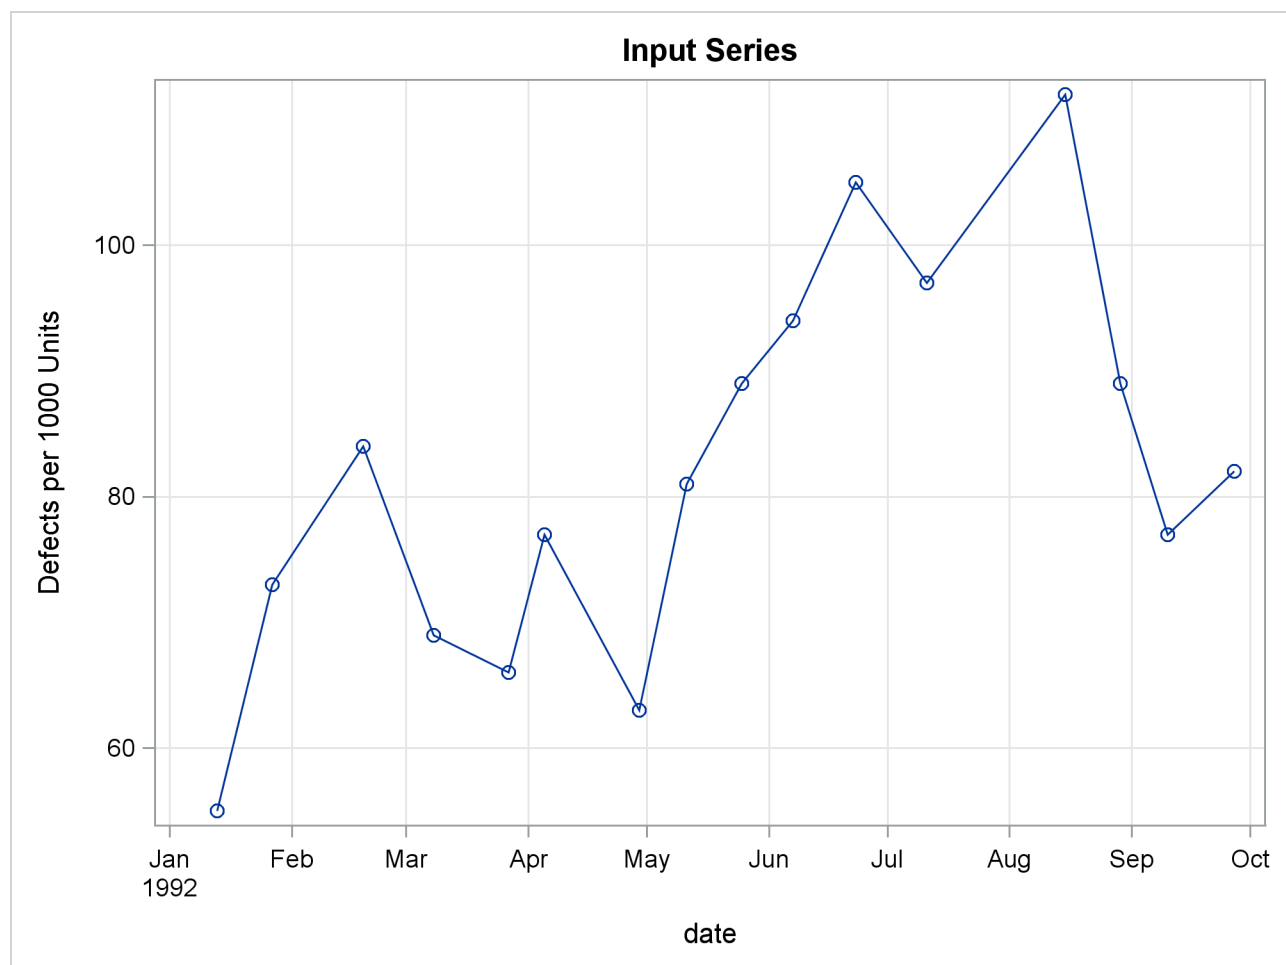
title "Estimated Monthly Average Defect Rates";
proc print data=monthly;
run;

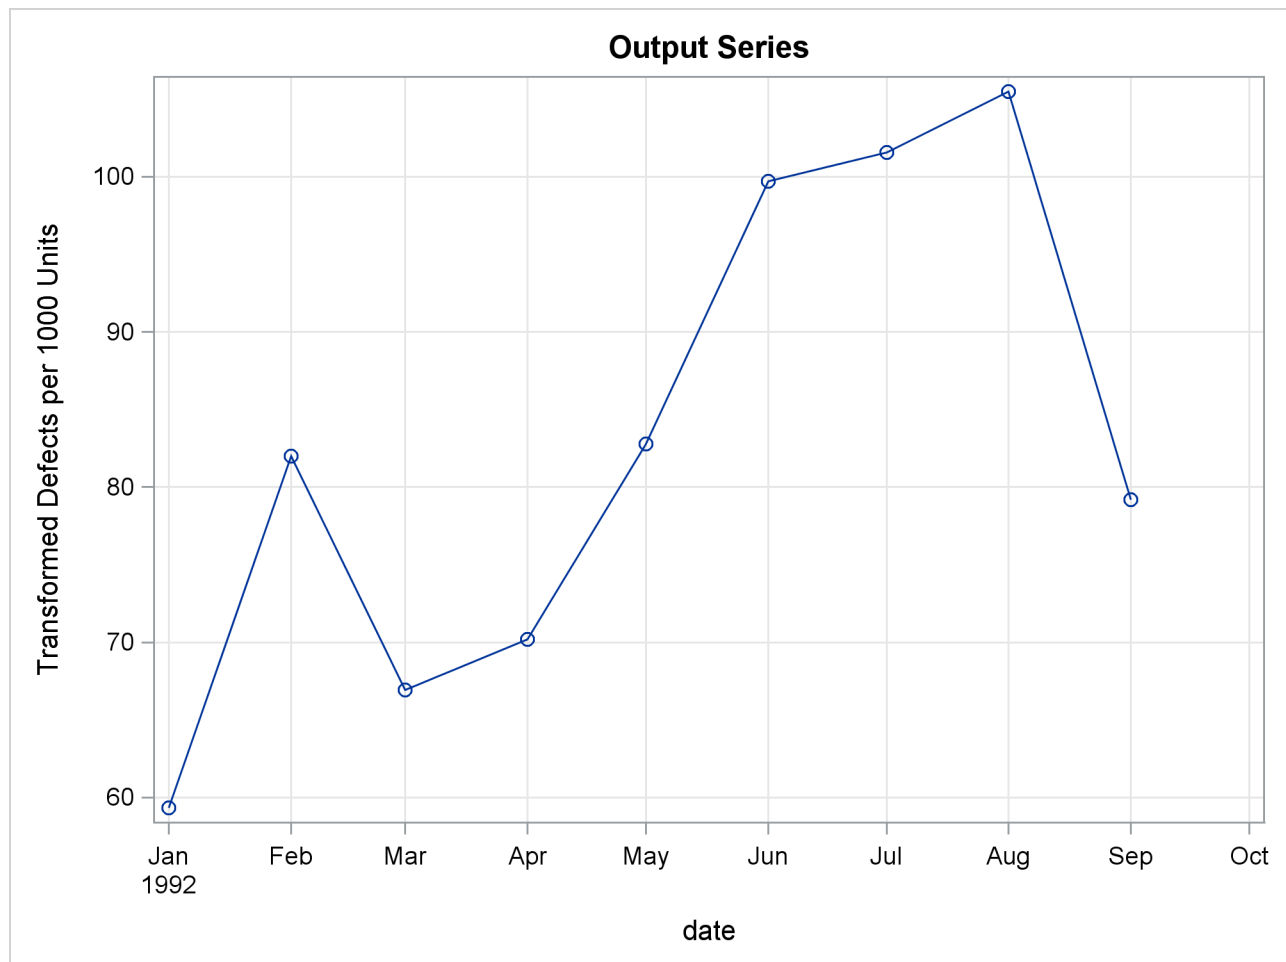
```

Output 15.3.2 Monthly Average Estimates

Estimated Monthly Average Defect Rates		
Obs	date	defects
1	JAN1992	59.323
2	FEB1992	82.000
3	MAR1992	66.909
4	APR1992	70.205
5	MAY1992	82.762
6	JUN1992	99.701
7	JUL1992	101.564
8	AUG1992	105.491
9	SEP1992	79.206

The plots produced by PROC EXPAND are shown in [Output 15.3.3](#).

Output 15.3.3 Interpolated Defects Rate Curve

Output 15.3.3 *continued***Example 15.4: Using Transformations**

This example shows the use of PROC EXPAND to perform various transformations of time series. The following statements read in monthly values for a variable X.

```
data test;
  input year qtr x;
  date = yyq( year, qtr );
  format date yyqc.;
datalines;
1989 3 5238
1989 4 5289
1990 1 5375
1990 2 5443
1990 3 5514
1990 4 5527
1991 1 5557
1991 2 5615
;
```

The following statements use PROC EXPAND to compute lags and leads and a 3-period moving average of the X series.

```
proc expand data=test out=out method=none;
  id date;
  convert x = x_lag2 / transformout=(lag 2);
  convert x = x_lag1 / transformout=(lag 1);
  convert x;
  convert x = x_lead1 / transformout=(lead 1);
  convert x = x_lead2 / transformout=(lead 2);
  convert x = x_movave / transformout=(movave 3);
run;

title "Transformed Series";
proc print data=out;
run;
```

Because there are no missing values to interpolate and no frequency conversion, the METHOD=NONE option is used to prevent PROC EXPAND from performing unnecessary computations. Because no frequency conversion is done, all variables in the input data set are copied to the output data set. The CONVERT X; statement is included to control the position of X in the output data set. This statement can be omitted, in which case X is copied to the output data set following the new variables computed by PROC EXPAND.

The results are shown in [Output 15.4.1](#).

Output 15.4.1 Output Data Set with Transformed Variables

Transformed Series									
Obs	date	x_lag2	x_lag1	x	x_lead1	x_lead2	x_movave	year	qtr
1	1989:3	.	.	5238	5289	5375	5238.00	1989	3
2	1989:4	.	5238	5289	5375	5443	5263.50	1989	4
3	1990:1	5238	5289	5375	5443	5514	5300.67	1990	1
4	1990:2	5289	5375	5443	5514	5527	5369.00	1990	2
5	1990:3	5375	5443	5514	5527	5557	5444.00	1990	3
6	1990:4	5443	5514	5527	5557	5615	5494.67	1990	4
7	1991:1	5514	5527	5557	5615	.	5532.67	1991	1
8	1991:2	5527	5557	5615	.	.	5566.33	1991	2

References

DeBoor, Carl (1981), *A Practical Guide to Splines*, New York: Springer-Verlag.

Hodrick, R. J., and Prescott, E. C. (1980). "Post-war U.S. business cycles: An empirical investigation." Discussion paper 451, Carnegie-Mellon University.

Levenbach, H. and Cleary, J.P. (1984), *The Modern Forecaster*, Belmont, CA: Lifetime Learning Publications (a division of Wadsworth, Inc.), 129-133.

Makridakis, S. and Wheelwright, S.C. (1978), *Interactive Forecasting: Univariate and Multivariate Methods*, Second Edition, San Francisco: Holden-Day, 198-201.

Wheelwright, S.C. and Makridakis, S. (1973), *Forecasting Methods for Management*, Third Edition, New York: Wiley-Interscience, 123-133.

Chapter 16

The FORECAST Procedure

Contents

Overview: FORECAST Procedure	846
Getting Started: FORECAST Procedure	847
Giving Dates to Forecast Values	849
Computing Confidence Limits	849
Form of the OUT= Data Set	850
Plotting Forecasts	851
Plotting Residuals	852
Model Parameters and Goodness-of-Fit Statistics	853
Controlling the Forecasting Method	855
Introduction to Forecasting Methods	856
Time Trend Models	857
Time Series Methods	859
Combining Time Trend with Autoregressive Models	860
Syntax: FORECAST Procedure	861
Functional Summary	861
PROC FORECAST Statement	863
BY Statement	867
ID Statement	868
VAR Statement	868
Details: FORECAST Procedure	868
Missing Values	868
Data Periodicity and Time Intervals	868
Forecasting Methods	869
Specifying Seasonality	877
Data Requirements	879
OUT= Data Set	879
OUTEST= Data Set	880
Examples: FORECAST Procedure	884
Example 16.1: Forecasting Auto Sales	884
Example 16.2: Forecasting Retail Sales	889
Example 16.3: Forecasting Petroleum Sales	894
References	897

Overview: FORECAST Procedure

The FORECAST procedure is superseded by newer SAS/ETS procedures that provide more powerful and flexible versions of the forecasting methods provided by PROC FORECAST, in addition to other forecasting methods. Consider one of the following alternatives before using PROC FORECAST:

- For forecasting with exponential smoothing or Winters method, consider using the [ESM procedure](#). PROC ESM provides an alternative to using PROC FORECAST with the METHOD=EXPO, METHOD=WINTERS, or METHOD=ADDWINTERS options; it also provides additional forecasting methods that PROC FORECAST does not support. Unlike PROC FORECAST, the ESM procedure optimizes the smoothing weights for the specified forecasting model based on the data. (See Chapter 14, “[The ESM Procedure](#),” for information about forecasting with PROC ESM.)
- For forecasting using time trend models with autoregressive errors, consider using the [AUTOREG procedure](#). PROC AUTOREG provides an alternative to using PROC FORECAST with the METHOD=STEPAR option. (See Chapter 8, “[The AUTOREG Procedure](#),” for information about PROC AUTOREG.)

If you decide to use PROC FORECAST instead of these newer alternatives, this chapter explains the features of the FORECAST procedure.

The FORECAST procedure provides a quick and automatic way to generate forecasts for many time series in one step. The procedure can forecast hundreds of series at a time, with the series organized into separate variables or across BY groups. PROC FORECAST uses extrapolative forecasting methods where the forecasts for a series are functions only of time and past values of the series, not of other variables.

You can use the following forecasting methods. For each of these methods, you can specify linear, quadratic, or no trend.

- The stepwise autoregressive method is used by default. This method combines time trend regression with an autoregressive model and uses a stepwise method to select the lags to use for the autoregressive process.
- The exponential smoothing method produces a time trend forecast. However, in fitting the trend, the parameters are allowed to change gradually over time, and earlier observations are given exponentially declining weights. Single, double, and triple exponential smoothing are supported, depending on whether no trend, linear trend, or quadratic trend, respectively, is specified. Holt two-parameter linear exponential smoothing is supported as a special case of the Holt-Winters method without seasons.
- The Winters method (also called Holt-Winters) combines a time trend with multiplicative seasonal factors to account for regular seasonal fluctuations in a series. Like the exponential smoothing method, the Winters method allows the parameters to change gradually over time, with earlier observations given exponentially declining weights. You can also specify the additive version of the Winters method, which uses additive instead of multiplicative seasonal factors. When seasonal factors are omitted, the Winters method reduces to the Holt two-parameter version of double exponential smoothing.

The FORECAST procedure writes the forecasts and confidence limits to an output data set. It can also write parameter estimates and fit statistics to an output data set. The FORECAST procedure does not produce printed output.

PROC FORECAST is an extrapolation procedure useful for producing practical results efficiently. However, in the interest of speed, PROC FORECAST uses some shortcuts that cause some statistical results (such as confidence limits) to be only approximate. For many time series, the FORECAST procedure, with appropriately chosen methods and weights, can yield satisfactory results. Other SAS/ETS procedures can produce better forecasts but at greater computational expense.

You can perform the stepwise autoregressive forecasting method with the [AUTOREG](#) procedure. You can perform forecasting by exponential smoothing with statistically optimal weights with the [ESM](#) procedure. Seasonal [ARIMA](#) models can be used for forecasting seasonal series for which the Winters and additive Winters methods might be used.

Additionally, the Time Series Forecasting System can be used to develop forecasting models, estimate the model parameters, evaluate the models' ability to forecast and display the results graphically. See Chapter 43, "[Getting Started with Time Series Forecasting](#)," for more details.

Getting Started: FORECAST Procedure

To use PROC FORECAST, specify the input and output data sets and the number of periods to forecast in the PROC FORECAST statement, and then list the variables to forecast in a VAR statement.

For example, suppose you have monthly data on the sales of some product in a data set named PAST, as shown in [Figure 16.1](#), and you want to forecast sales for the next 10 months.

Figure 16.1 Example Data Set PAST

Obs	date	sales
1	JUL89	9.5161
2	AUG89	9.6994
3	SEP89	9.2644
4	OCT89	9.6837
5	NOV89	10.0784
6	DEC89	9.9005
7	JAN90	10.2375
8	FEB90	10.6940
9	MAR90	10.6290
10	APR90	11.0332
11	MAY90	11.0270
12	JUN90	11.4165
13	JUL90	11.2918
14	AUG90	11.3475
15	SEP90	11.2913
16	OCT90	11.3771
17	NOV90	11.5457
18	DEC90	11.6433
19	JAN91	11.9293
20	FEB91	11.9752
21	MAR91	11.9283
22	APR91	11.8985
23	MAY91	12.0419
24	JUN91	12.3537
25	JUL91	12.4546

The following statements forecast 10 observations for the variable SALES by using the default STEPAR method and write the results to the output data set PRED:

```
proc forecast data=past lead=10 out=pred;
  var sales;
run;
```

The following statements use the PRINT procedure to print the data set PRED:

```
proc print data=pred;
run;
```

The PROC PRINT listing of the forecast data set PRED is shown in [Figure 16.2](#).

Figure 16.2 Forecast Data Set PRED

Obs	_TYPE_	_LEAD_	sales
1	FORECAST	1	12.6205
2	FORECAST	2	12.7665
3	FORECAST	3	12.9020
4	FORECAST	4	13.0322
5	FORECAST	5	13.1595
6	FORECAST	6	13.2854
7	FORECAST	7	13.4105
8	FORECAST	8	13.5351
9	FORECAST	9	13.6596
10	FORECAST	10	13.7840

Giving Dates to Forecast Values

Normally, your input data set has an ID variable that gives dates to the observations, and you want the forecast observations to have dates also. Usually, the ID variable has SAS date values. (See Chapter 3, “[Working with Time Series Data](#),” for information about using SAS date and datetime values.) The ID statement specifies the identifying variable.

If the ID variable contains SAS date or datetime values, the INTERVAL= option should be used on the PROC FORECAST statement to specify the time interval between observations. (See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about time intervals.) The FORECAST procedure uses the INTERVAL= option to generate correct dates for forecast observations.

The data set PAST, shown in [Figure 16.1](#), has monthly observations and contains an ID variable DATE with SAS date values identifying each observation. The following statements produce the same forecast as the preceding example and also include the ID variable DATE in the output data set. Monthly SAS date values are extrapolated for the forecast observations.

```
proc forecast data=past interval=month lead=10 out=pred;
  var sales;
  id date;
run;
```

Computing Confidence Limits

Depending on the output options specified, multiple observations are written to the OUT= data set for each time period. The different parts of the results are contained in the VAR statement variables in observations identified by the character variable _TYPE_ and by the ID variable.

For example, the following statements use the OUTLIMIT option to write forecasts and 95% confidence limits for the variable SALES to the output data set PRED. This data set is printed with the PRINT procedure.

```

proc forecast data=past interval=month lead=10
              out=pred outlimit;
  var sales;
  id date;
run;

proc print data=pred;
run;

```

The output data set PRED is shown in [Figure 16.3](#).

Figure 16.3 Output Data Set

Obs	date	_TYPE_	_LEAD_	sales
1	AUG91	FORECAST	1	12.6205
2	AUG91	L95	1	12.1848
3	AUG91	U95	1	13.0562
4	SEP91	FORECAST	2	12.7665
5	SEP91	L95	2	12.2808
6	SEP91	U95	2	13.2522
7	OCT91	FORECAST	3	12.9020
8	OCT91	L95	3	12.4001
9	OCT91	U95	3	13.4039
10	NOV91	FORECAST	4	13.0322
11	NOV91	L95	4	12.5223
12	NOV91	U95	4	13.5421
13	DEC91	FORECAST	5	13.1595
14	DEC91	L95	5	12.6435
15	DEC91	U95	5	13.6755
16	JAN92	FORECAST	6	13.2854
17	JAN92	L95	6	12.7637
18	JAN92	U95	6	13.8070
19	FEB92	FORECAST	7	13.4105
20	FEB92	L95	7	12.8830
21	FEB92	U95	7	13.9379
22	MAR92	FORECAST	8	13.5351
23	MAR92	L95	8	13.0017
24	MAR92	U95	8	14.0686
25	APR92	FORECAST	9	13.6596
26	APR92	L95	9	13.1200
27	APR92	U95	9	14.1993
28	MAY92	FORECAST	10	13.7840
29	MAY92	L95	10	13.2380
30	MAY92	U95	10	14.3301

Form of the OUT= Data Set

The OUT= data set PRED, shown in [Figure 16.3](#), contains three observations for each of the 10 forecast periods. Each of these three observations has the same value of the ID variable DATE, the SAS date value for the month and year of the forecast.

The three observations for each forecast period have different values of the variable `_TYPE_`. For the `_TYPE_=FORECAST` observation, the value of the variable `SALES` is the forecast value for the period indicated by the `DATE` value. For the `_TYPE_=L95` observation, the value of the variable `SALES` is the lower limit of the 95% confidence interval for the forecast. For the `_TYPE_=U95` observation, the value of the variable `SALES` is the upper limit of the 95% confidence interval.

You can control the types of observations written to the `OUT=` data set with the `PROC FORECAST` statement options `OUTLIMIT`, `OUTRESID`, `OUTACTUAL`, `OUT1STEP`, `OUTSTD`, `OUTFULL`, and `OUTALL`. For example, the `OUTFULL` option outputs the confidence limit values, the one-step-ahead predictions, and the actual data, in addition to the forecast values. See the sections “[Syntax: FORECAST Procedure](#)” on page 861 and “[OUTEST= Data Set](#)” on page 880 for more information.

Plotting Forecasts

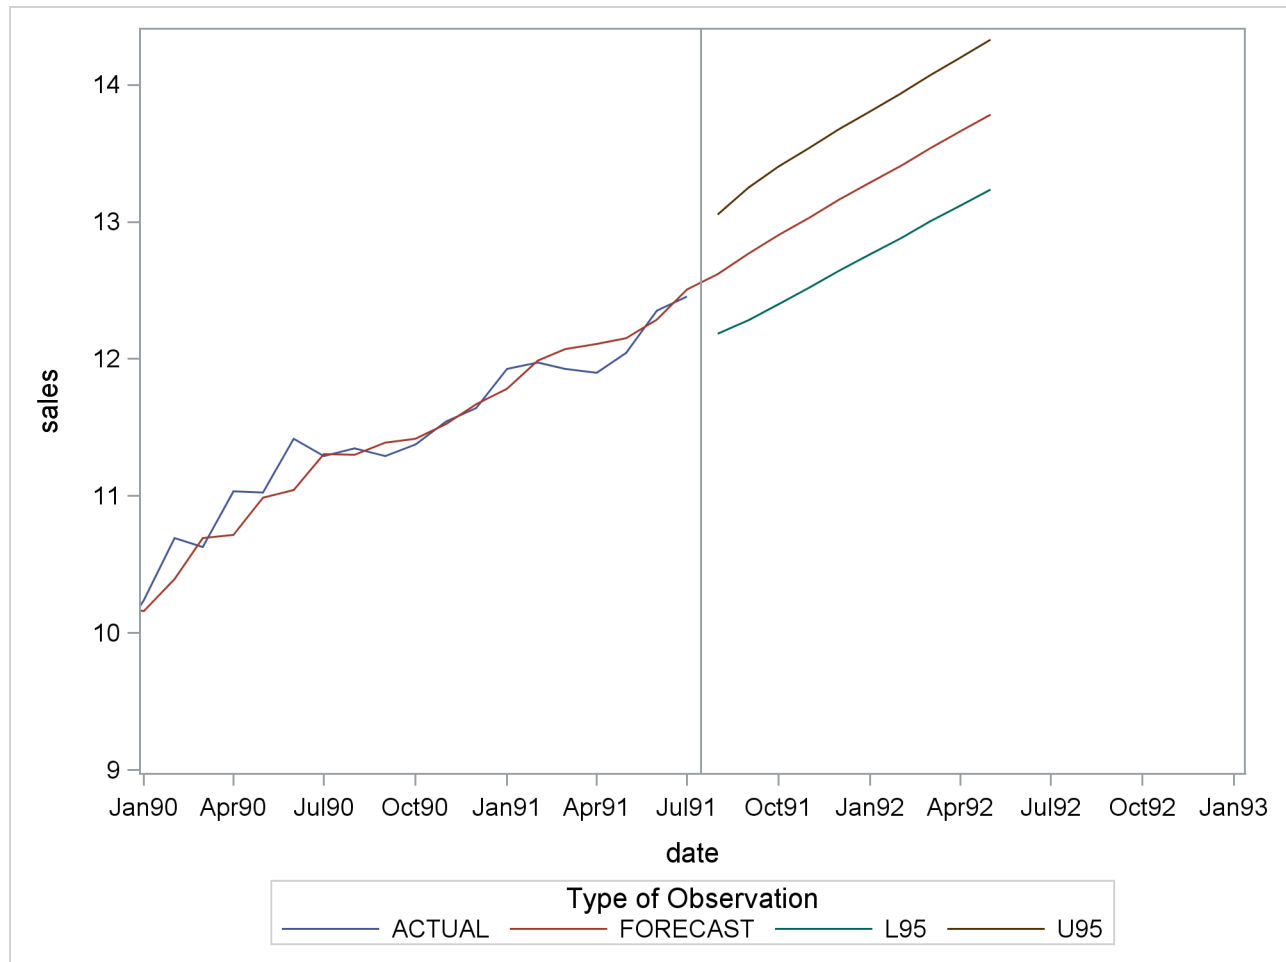
The forecasts, confidence limits, and actual values can be plotted on the same graph with the `SGPLOT` procedure. Use the appropriate output control options in the `PROC FORECAST` statement to include in the `OUT=` data set the series you want to plot. Use the `_TYPE_` variable in the `SGPLOT` procedure `GROUP` option to separate the observations for the different plots.

The `OUTFULL` option is used in the following statements. The resulting output data set contains the actual and predicted values, as well as the upper and lower 95% confidence limits.

```
proc forecast data=past interval=month lead=10
    out=pred outfull;
    id date;
    var sales;
run;

proc sgplot data=pred;
    series x=date y=sales / group=_type_ lineattrs=(pattern=1);
    xaxis values=('1jan90'd to '1jan93'd by qtr);
    refline '15jul91'd / axis=x;
run;
```

The `_TYPE_` variable is used in the `SGPLOT` procedure’s `PLOT` statement to make separate plots over time for each type of value. A reference line marks the start of the forecast period. (See *SAS/GRAPH: Reference* for more information about using `PROC SGPLOT`.) The `WHERE` statement restricts the range of the actual data shown in the plot. In this example, the variable `SALES` has monthly data from July 1989 through July 1991, but only the data for 1990 and 1991 are shown in [Figure 16.4](#).

Figure 16.4 Plot of Forecast with Confidence Limits

Plotting Residuals

You can plot the residuals from the forecasting model by using PROC SGPLOT and a WHERE statement.

1. Use the OUTRESID option or the OUTALL option in the PROC FORECAST statement to include the residuals in the output data set.
2. Use a WHERE statement to specify the observation type of 'RESIDUAL' in the PROC GGPLOT code.

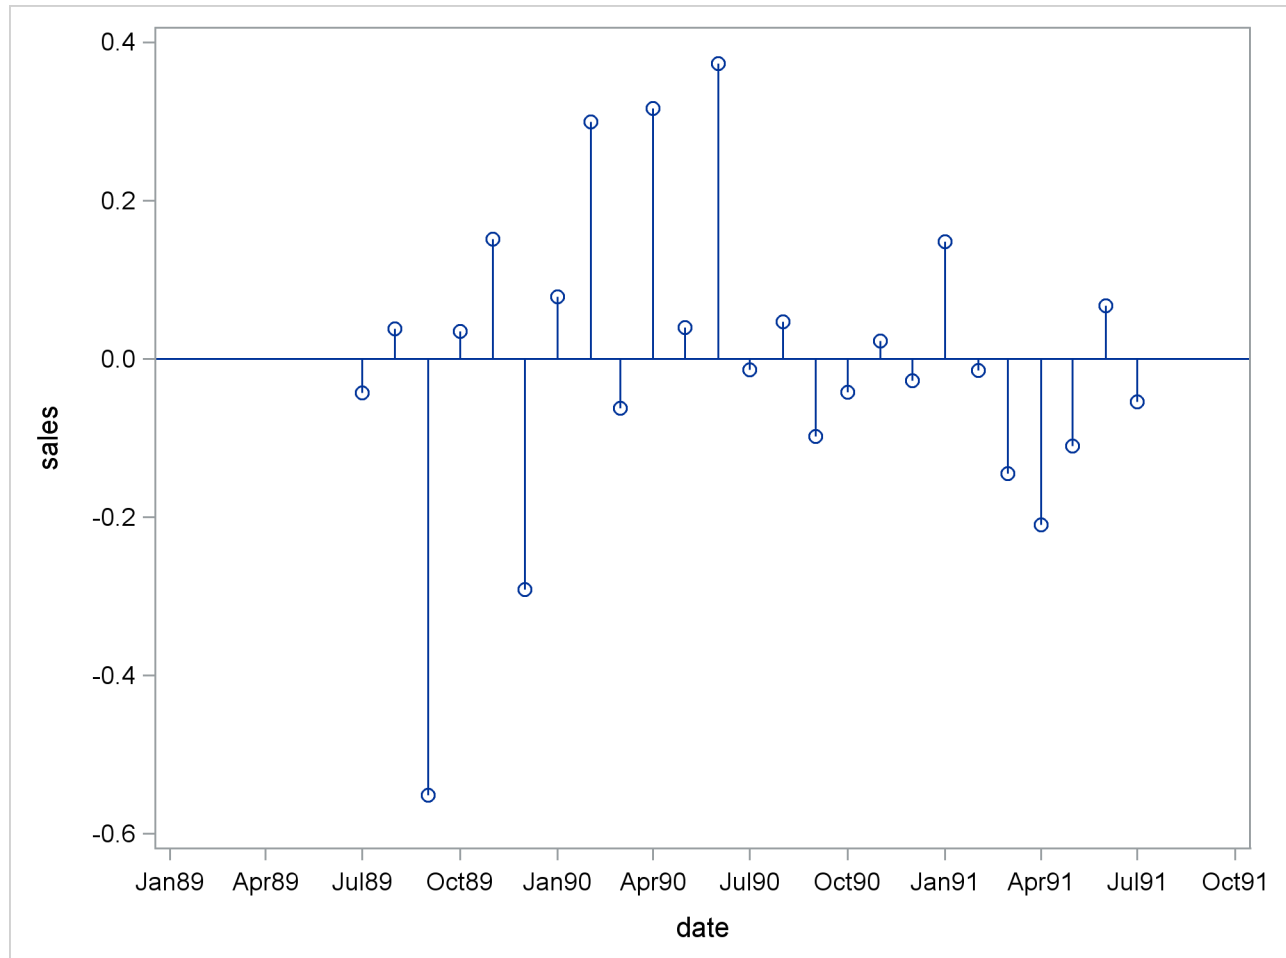
The following statements add the OUTRESID option to the preceding example and plot the residuals:

```
proc forecast data=past interval=month lead=10
              out=pred outfull outresid;
    id date;
    var sales;
run;
```

```
proc sgplot data=pred;
  where _type_='RESIDUAL';
  needle x=date y=sales / markers;
  xaxis values=('1jan89'd to '1oct91'd by qtr);
run;
```

The plot of residuals is shown in Figure 16.5.

Figure 16.5 Plot of Residuals



Model Parameters and Goodness-of-Fit Statistics

You can write the parameters of the forecasting models used, as well as statistics that measure how well the forecasting models fit the data, to an output SAS data set by using the `OUTEST=` option. The options `OUTFITSTATS`, `OUTESTTHEIL`, and `OUTESTALL` control what goodness-of-fit statistics are added to the `OUTEST=` data set.

For example, the following statements add the `OUTEST=` and `OUTFITSTATS` options to the previous example to create the output statistics data set `EST` for the results of the default stepwise autoregressive forecasting method:

```

proc forecast data=past interval=month lead=10
    out=pred outfull outresid
    outest=est outfitstats;
    id date;
    var sales;
run;

proc print data=est;
run;

```

The PRINT procedure prints the OUTEST= data set, as shown in Figure 16.6.

Figure 16.6 The OUTEST= Data Set for STEPAR Method

Obs	_TYPE_	date	sales
1	N	JUL91	25
2	NRESID	JUL91	25
3	DF	JUL91	22
4	SIGMA	JUL91	0.2001613
5	CONSTANT	JUL91	9.4348822
6	LINEAR	JUL91	0.1242648
7	AR1	JUL91	0.5206294
8	AR2	JUL91	.
9	AR3	JUL91	.
10	AR4	JUL91	.
11	AR5	JUL91	.
12	AR6	JUL91	.
13	AR7	JUL91	.
14	AR8	JUL91	.
15	SST	JUL91	21.28342
16	SSE	JUL91	0.8793714
17	MSE	JUL91	0.0399714
18	RMSE	JUL91	0.1999286
19	MAPE	JUL91	1.2280089
20	MPE	JUL91	-0.050139
21	MAE	JUL91	0.1312115
22	ME	JUL91	-0.001811
23	MAXE	JUL91	0.3732328
24	MINE	JUL91	-0.551605
25	MAXPE	JUL91	3.2692294
26	MINPE	JUL91	-5.954022
27	RSQUARE	JUL91	0.9586828
28	ADJRSQ	JUL91	0.9549267
29	RW_RSQ	JUL91	0.2657801
30	ARSQ	JUL91	0.9474145
31	APC	JUL91	0.044768
32	AIC	JUL91	-77.68559
33	SBC	JUL91	-74.02897
34	CORR	JUL91	0.9791313

In the OUTEST= data set, the DATE variable contains the ID value of the last observation in the data set used to fit the forecasting model. The variable SALES contains the statistic indicated by the value of the _TYPE_ variable. The _TYPE_=N, NRESID, and DF observations contain, respectively, the number of observations

read from the data set, the number of nonmissing residuals used to compute the goodness-of-fit statistics, and the number of nonmissing observations minus the number of parameters used in the forecasting model.

The observation that has `_TYPE_=SIGMA` contains the estimate of the standard deviation of the one-step prediction error computed from the residuals. The `_TYPE_=CONSTANT` and `_TYPE_=LINEAR` observations contain the coefficients of the time trend regression. The `_TYPE_=AR1`, `AR2`, ..., `AR8` observations contain the estimated autoregressive parameters. A missing autoregressive parameter indicates that the autoregressive term at that lag was not retained in the model by the stepwise model selection method. (See the section “[STEPAR Method](#)” on page 869 for more information.)

The other observations in the `OUTEST=` data set contain various goodness-of-fit statistics that measure how well the forecasting model used fits the given data. See the section “[OUTEST= Data Set](#)” on page 880 for details.

Controlling the Forecasting Method

The `METHOD=` option controls which forecasting method is used. The `TREND=` option controls the degree of the time trend model used. For example, the following statements produce forecasts of `SALES` as in the preceding example but use the double exponential smoothing method instead of the default `STEPAR` method:

```
proc forecast data=past interval=month lead=10
              method=expo trend=2
              out=pred outfull outresid
              outest=est outfitstats;
    var sales;
    id date;
run;

proc print data=est;
run;
```

The `PRINT` procedure prints the `OUTEST=` data set for the `EXPO` method, as shown in [Figure 16.7](#).

Figure 16.7 The OUTEST= Data Set for METHOD=EXPO

Obs	_TYPE_	date	sales
1	N	JUL91	25
2	NRESID	JUL91	25
3	DF	JUL91	23
4	WEIGHT	JUL91	0.1055728
5	S1	JUL91	11.427657
6	S2	JUL91	10.316473
7	SIGMA	JUL91	0.2545069
8	CONSTANT	JUL91	12.538841
9	LINEAR	JUL91	0.1311574
10	SST	JUL91	21.28342
11	SSE	JUL91	1.4897965
12	MSE	JUL91	0.0647738
13	RMSE	JUL91	0.2545069
14	MAPE	JUL91	1.9121204
15	MPE	JUL91	-0.816886
16	MAE	JUL91	0.2101358
17	ME	JUL91	-0.094941
18	MAXE	JUL91	0.3127332
19	MINE	JUL91	-0.460207
20	MAXPE	JUL91	2.9243781
21	MINPE	JUL91	-4.967478
22	RSQUARE	JUL91	0.930002
23	ADJRSQ	JUL91	0.9269586
24	RW_RSQ	JUL91	-0.243886
25	ARSQ	JUL91	0.9178285
26	APC	JUL91	0.0699557
27	AIC	JUL91	-66.50591
28	SBC	JUL91	-64.06816
29	CORR	JUL91	0.9772418

See the section “Syntax: FORECAST Procedure” on page 861 for other options that control the forecasting method. See the section “Introduction to Forecasting Methods” on page 856 and the section “Forecasting Methods” on page 869 for an explanation of the different forecasting methods.

Introduction to Forecasting Methods

This section briefly introduces the forecasting methods used by the FORECAST procedure. See textbooks on forecasting and see the section “Forecasting Methods” on page 869 for more detailed discussions of forecasting methods.

The FORECAST procedure combines three basic models to fit time series:

- time trend models for long-term, deterministic change
- autoregressive models for short-term fluctuations
- seasonal models for regular seasonal fluctuations

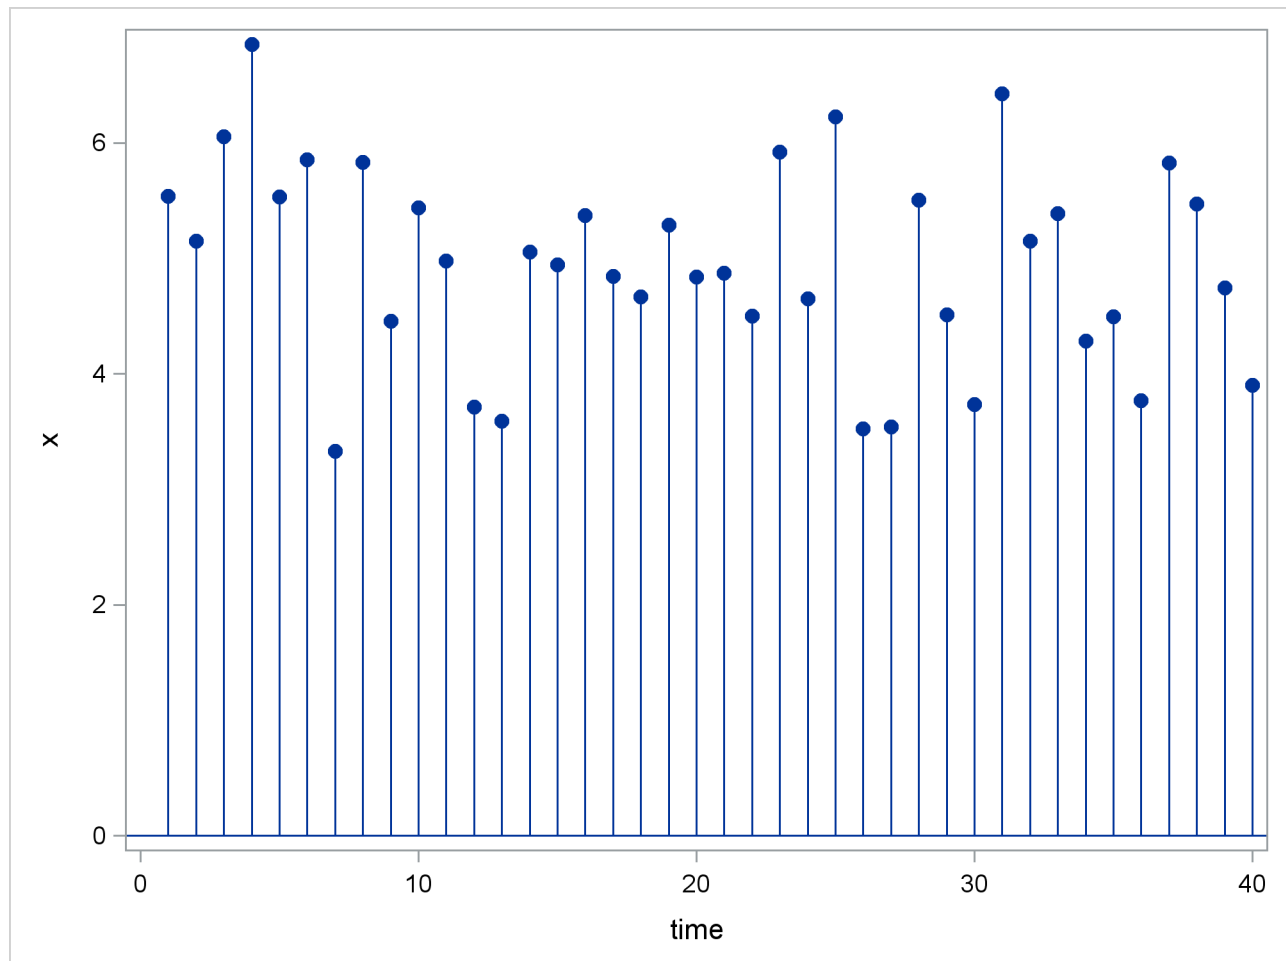
Two approaches to time series modeling and forecasting are *time trend models* and *time series methods*.

Time Trend Models

Time trend models assume that there is some permanent deterministic pattern across time. These models are best suited to data that are not dominated by random fluctuations.

Examining a graphical plot of the time series you want to forecast is often very useful in choosing an appropriate model. The simplest case of a time trend model is one in which you assume the series is a constant plus purely random fluctuations that are independent from one time period to the next. Figure 16.8 shows how such a time series might look.

Figure 16.8 Time Series without Trend



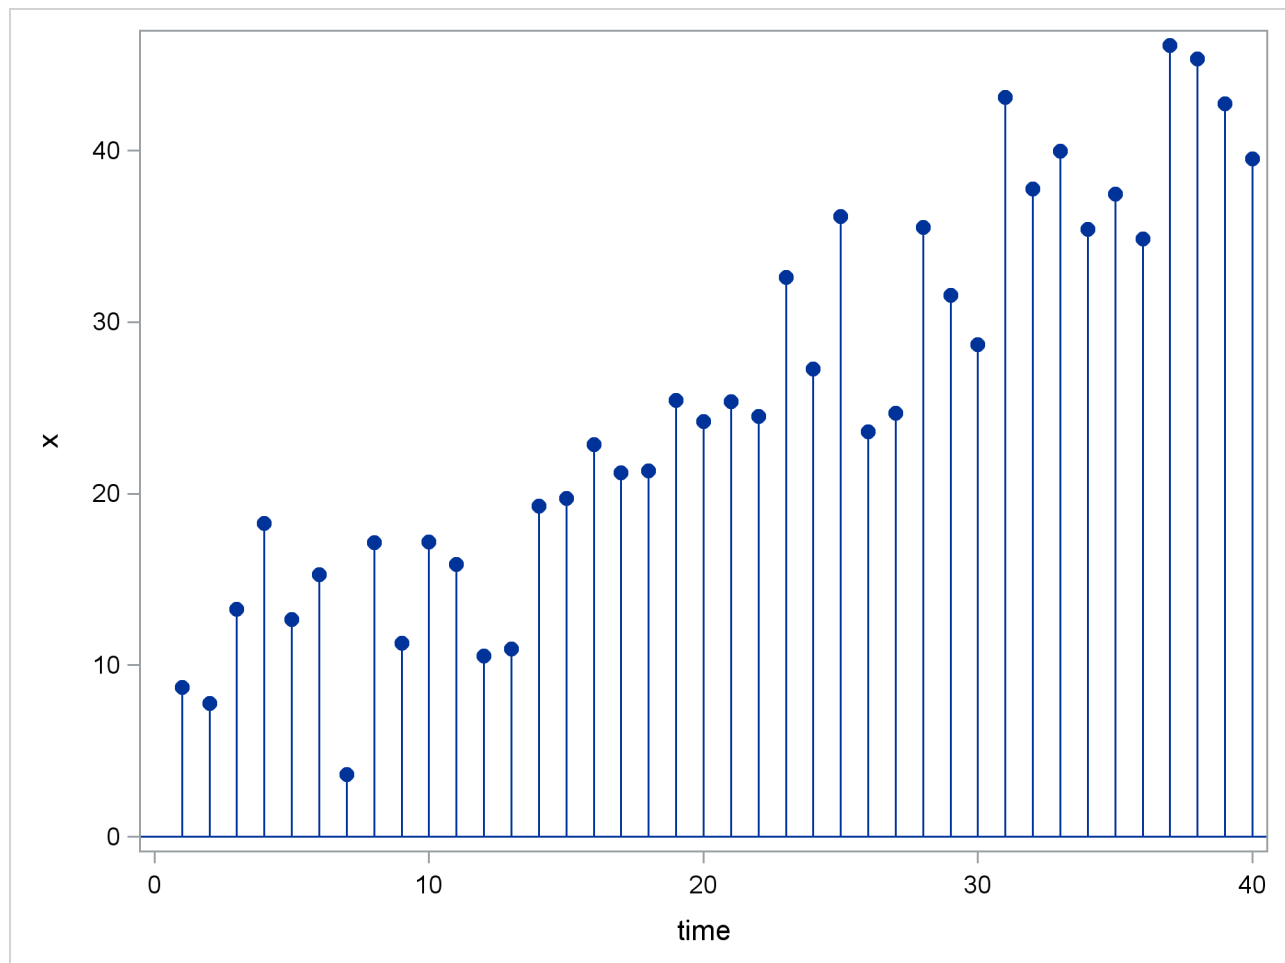
The x_t values are generated according to the equation

$$x_t = b_0 + \epsilon_t$$

where ϵ_t is an independent, zero-mean, random error and b_0 is the true series mean.

Suppose that the series exhibits growth over time, as shown in Figure 16.9.

Figure 16.9 Time Series with Linear Trend



A linear model is appropriate for this data. For the linear model, assume the x_t values are generated according to the equation

$$x_t = b_0 + b_1t + \epsilon_t$$

The linear model has two parameters. The predicted values for the future are the points on the estimated line. The extension of the polynomial model to three parameters is the quadratic (which forms a parabola). This allows for a constantly changing slope, where the x_t values are generated according to the equation

$$x_t = b_0 + b_1t + b_2t^2 + \epsilon_t$$

PROC FORECAST can fit three types of time trend models: constant, linear, and quadratic. For other kinds of trend models, other SAS procedures can be used.

Exponential smoothing fits a time trend model by using a smoothing scheme in which the weights decline geometrically as you go backward in time. The forecasts from exponential smoothing are a time trend, but the trend is based mostly on the recent observations instead of on all the observations equally. How well

exponential smoothing works as a forecasting method depends on choosing a good smoothing weight for the series.

To specify the exponential smoothing method, use the `METHOD=EXPO` option. Single exponential smoothing produces forecasts with a constant trend (that is, no trend). Double exponential smoothing produces forecasts with a linear trend, and triple exponential smoothing produces a quadratic trend. Use the `TREND=` option with the `METHOD=EXPO` option to select single, double, or triple exponential smoothing.

The time trend model can be modified to account for regular seasonal fluctuations of the series about the trend. To capture seasonality, the trend model includes a seasonal parameter for each season. Seasonal models can be additive or multiplicative.

$$x_t = b_0 + b_1t + s(t) + \epsilon_t \quad (\text{additive})$$

$$x_t = (b_0 + b_1t)s(t) + \epsilon_t \quad (\text{multiplicative})$$

where $s(t)$ is the seasonal parameter for the season that corresponds to time t .

The Winters method is similar to exponential smoothing, but it includes seasonal factors. The Winters method can use either additive or multiplicative seasonal factors. Like exponential smoothing, good results with the Winters method depend on choosing good smoothing weights for the series to be forecast.

To specify the multiplicative or additive versions of the Winters method, use the `METHOD=WINTERS` or `METHOD=ADDWINTERS` options, respectively. To specify seasonal factors to include in the model, use the `SEASONS=` option.

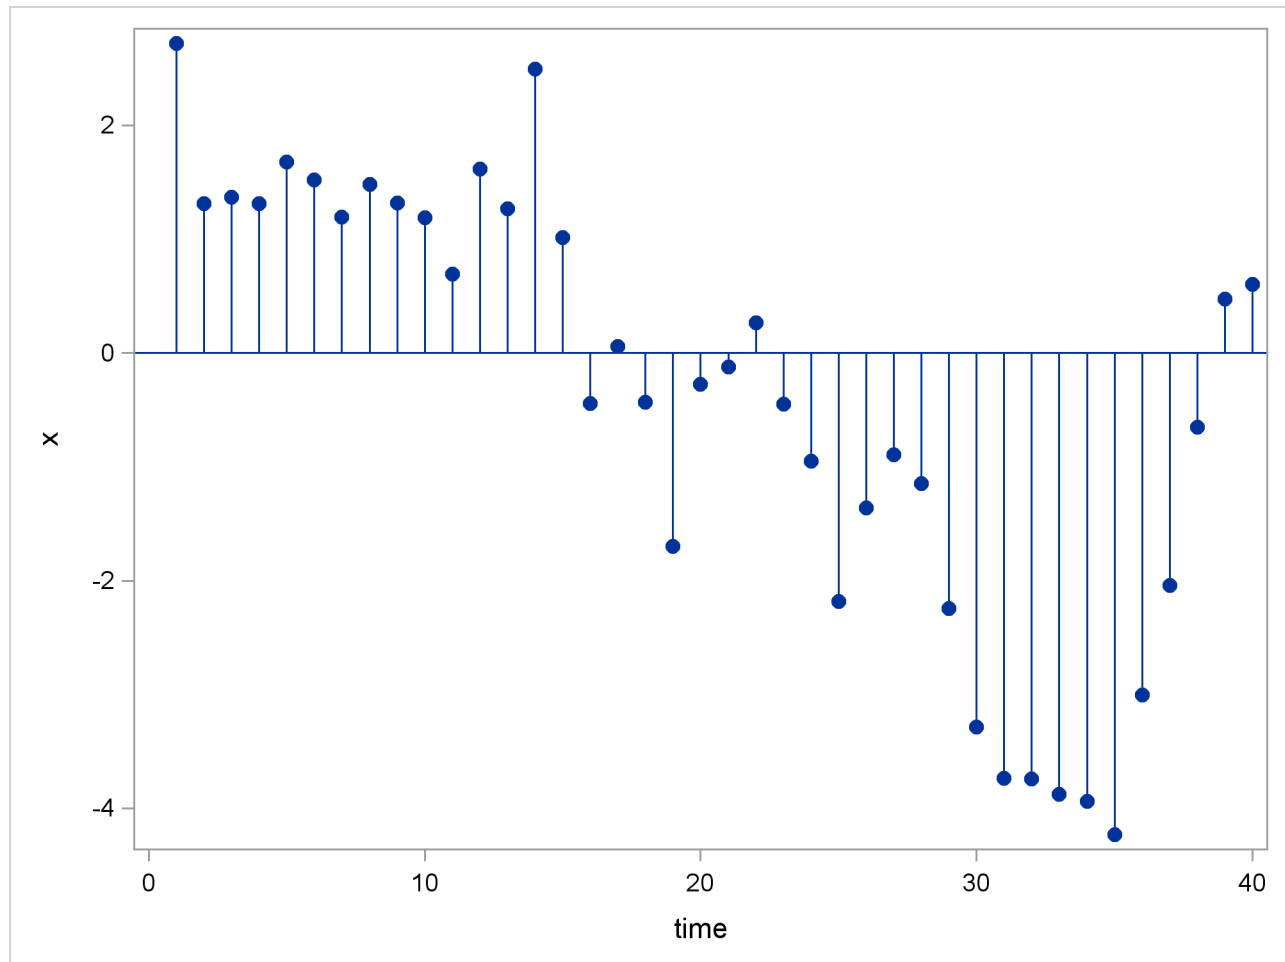
Many observed time series do not behave like constant, linear, or quadratic time trends. However, you can partially compensate for the inadequacies of the trend models by fitting time series models to the departures from the time trend, as described in the following sections.

Time Series Methods

Time series models assume the future value of a variable to be a linear function of past values. If the model is a function of past values for a finite number of periods, it is an *autoregressive model* and is written as follows:

$$x_t = a_0 + a_1x_{t-1} + a_2x_{t-2} + \dots + a_px_{t-p} + \epsilon_t$$

The coefficients a_i are *autoregressive parameters*. One of the simplest cases of this model is the random walk, where the series dances around in purely random jumps. This is illustrated in [Figure 16.10](#).

Figure 16.10 Random Walk Series

The x_t values are generated by the equation

$$x_t = x_{t-1} + \epsilon_t$$

In this type of model, the best forecast of a future value is the present value. However, with other autoregressive models, the best forecast is a weighted sum of recent values. Pure autoregressive forecasts always damp down to a constant (assuming the process is stationary).

Autoregressive time series models can also be used to predict seasonal fluctuations.

Combining Time Trend with Autoregressive Models

Trend models are suitable for capturing long-term behavior, whereas autoregressive models are more appropriate for capturing short-term fluctuations. One approach to forecasting is to combine a deterministic time trend model with an autoregressive model.

The *stepwise autoregressive method* (STEPAR method) combines a time trend regression with an autoregressive model for departures from trend. The combined time trend and autoregressive model is written as follows:

$$x_t = b_0 + b_1t + b_2t^2 + u_t$$

$$u_t = a_1u_{t-1} + a_2u_{t-2} + \dots + a_pu_{t-p} + \epsilon_t$$

The autoregressive parameters included in the model for each series are selected by a stepwise regression procedure, so that autoregressive parameters are included only at those lags at which they are statistically significant.

The stepwise autoregressive method is fully automatic. Unlike the exponential smoothing and Winters methods, it does not depend on choosing smoothing weights. However, the STEPAR method assumes that the long-term trend is stable; that is, the time trend regression is fit to the whole series with equal weights for the observations.

The stepwise autoregressive model is used when you specify the METHOD=STEPAR option or do not specify any METHOD= option. To select a constant, linear, or quadratic trend for the time-trend part of the model, use the TREND= option.

Syntax: FORECAST Procedure

The following statements are used with PROC FORECAST:

```
PROC FORECAST options ;
    BY variables ;
    ID variables ;
    VAR variables ;
```

Functional Summary

Table 16.1 summarizes the statements and options that control the FORECAST procedure.

Table 16.1 FORECAST Functional Summary

Description	Statement	Option
Statements		
specify model and data set options	PROC FORECAST	
specify BY-group processing	BY	
identify observations	ID	
specify the variables to forecast	VAR	
Input Data Set Options		
specify the input SAS data set	PROC FORECAST	DATA=

Description	Statement	Option
specify frequency of the input time series	PROC FORECAST	INTERVAL=
specify increment between observations	PROC FORECAST	INTPER=
specify seasonality	PROC FORECAST	SEASONS=
specify number of periods in a season	PROC FORECAST	SINTPER=
treat zeros at beginning of series as missing	PROC FORECAST	ZEROMISS
Output Data Set Options		
specify the number of periods ahead to forecast	PROC FORECAST	LEAD=
name output data set to contain the forecasts	PROC FORECAST	OUT=
write actual values to the OUT= data set	PROC FORECAST	OUTACTUAL
write confidence limits to the OUT= data set	PROC FORECAST	OUTLIMIT
write residuals to the OUT= data set	PROC FORECAST	OUTRESID
write standard errors of the forecasts to the OUT= data set	PROC FORECAST	OUTSTD
write one-step-ahead predicted values to the OUT= data set	PROC FORECAST	OUT1STEP
write predicted, actual, and confidence limit values to the OUT= data set	PROC FORECAST	OUTFULL
write all available results to the OUT= data set	PROC FORECAST	OUTALL
specify significance level for confidence limits	PROC FORECAST	ALPHA=
control the alignment of SAS date values	PROC FORECAST	ALIGN=
Parameters and Statistics Output Data Set Options		
write parameter estimates and goodness-of-fit statistics to an output data set	PROC FORECAST	OUTEST=
write additional statistics to OUTEST= data set	PROC FORECAST	OUTESTALL
write Theil statistics to OUTEST= data set	PROC FORECAST	OUTESTTHEIL
write forecast accuracy statistics to OUTEST= data set	PROC FORECAST	OUTFITSTATS
Forecasting Method Options		
specify the forecasting method	PROC FORECAST	METHOD=
specify degree of the time trend model	PROC FORECAST	TREND=
specify smoothing weights	PROC FORECAST	WEIGHT=
specify order of the autoregressive model	PROC FORECAST	AR=
specify significance level for adding AR lags	PROC FORECAST	SLENTRY=
specify significance level for keeping AR lags	PROC FORECAST	SLSTAY=
start forecasting before the end of data	PROC FORECAST	START=
specify criterion for judging singularity	PROC FORECAST	SINGULAR=
limit number of error or warning messages	PROC FORECAST	MAXERRORS=

Description	Statement	Option
Initializing Smoothed Values		
specify number of beginning values to use in calculating starting values	PROC FORECAST	NSTART=
specify number of beginning values to use in calculating initial seasonal parameters	PROC FORECAST	NSSTART=
specify starting values for constant term	PROC FORECAST	ASTART=
specify starting values for linear trend	PROC FORECAST	BSTART=
specify starting values for the quadratic trend	PROC FORECAST	CSTART=

PROC FORECAST Statement

PROC FORECAST *options* ;

The following options can be specified in the PROC FORECAST statement:

ALIGN=*option*

controls the alignment of SAS dates used to identify output observations. The ALIGN= option allows the following values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. BEGINNING is the default.

ALPHA=*value*

specifies the significance level to use in computing the confidence limits of the forecast. The value of the ALPHA= option must be between 0.01 and 0.99. You should use only two digits for the ALPHA= option because PROC FORECAST rounds the value to the nearest percent (ALPHA=0.101 is the same as ALPHA=0.10). The default is ALPHA=0.05, which produces 95% confidence limits.

AR=*n*

NLAGS=*n*

specifies the maximum order of the autoregressive model. The AR= option is valid only for METHOD=STEPAR. The default value of *n* depends on the INTERVAL= option and on the number of observations in the DATA= data set. See the section “[STEPAR Method](#)” on page 869 for details.

ASTART=*value*

ASTART=(*value* ...)

specifies starting values for the constant term for the exponential smoothing, Winters, and additive Winters methods. This option is ignored if METHOD=STEPAR. The values specified are associated with the variables in the VAR statement in the order in which the variables are listed. See the section “[Starting Values for EXPO, WINTERS, and ADDWINTERS Methods](#)” on page 876 for details.

BSTART=*value***BSTART=**(*value* ...)

specifies starting values for the linear trend for the exponential smoothing, Winters, and additive Winters methods. The values specified are associated with the variables in the VAR statement in the order in which the variables are listed. This option is ignored if METHOD=STEPAR or TREND=1. See the section “[Starting Values for EXPO, WINTERS, and ADDWINTERS Methods](#)” on page 876 for details.

CSTART=*value***CSTART=**(*value* ...)

specifies starting values for the quadratic trend for the exponential smoothing, Winters, and additive Winters methods. The values specified are associated with the variables in the VAR statement in the order in which the variables are listed. This option is ignored if METHOD=STEPAR or TREND=1 or 2. See the section “[Starting Values for EXPO, WINTERS, and ADDWINTERS Methods](#)” on page 876 for details.

DATA=*SAS-data-set*

names the SAS data set that contains the input time series for the procedure to forecast. If the DATA= option is not specified, the most recently created SAS data set is used.

INTERVAL=*interval*

specifies the frequency of the input time series. For example, if the input data set consists of quarterly observations, then INTERVAL=QTR should be used. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more details about the intervals available.

INTPER=*n*

when the INTERVAL= option is not used, specifies an increment (other than 1) to use in generating the values of the ID variable for the forecast observations in the output data set.

LEAD=*n*

specifies the number of periods ahead to forecast. The default is LEAD=12.

The LEAD= value is relative to the last observation in the input data set and not to the end of a particular series. Thus, if a series has missing values at the end, the actual number of forecasts computed for that series will be greater than the LEAD= value.

MAXERRORS=*n*

limits the number of warning and error messages produced during the execution of the procedure to the specified value. The default is MAXERRORS=50.

This option is particularly useful in BY-group processing where it can be used to suppress the recurring messages.

METHOD=*method-name*

specifies the method to use to model the series and generate the forecasts.

METHOD=STEPAR specifies the stepwise autoregressive method.

METHOD=EXPO specifies the exponential smoothing method.

METHOD=WINTERS specifies the Holt-Winters exponentially smoothed trend-seasonal method.

METHOD=ADDWINTERS specifies the additive seasonal factors variant of the Winters method.

For more information, see the section “[Forecasting Methods](#)” on page 869. The default is **METHOD=STEPAR**.

NSTART=*n*

NSTART=MAX

specifies the number of beginning values of the series to use in calculating starting values for the trend parameters in the exponential smoothing, Winters, and additive Winters methods. This option is ignored if **METHOD=STEPAR**.

For **METHOD=EXPO**, *n* beginning values of the series are used in forming the exponentially smoothed values *S*1, *S*2, and *S*3, where *n* is the value of the **NSTART=** option. The parameters are initialized by fitting a time trend regression to the first *n* nonmissing values of the series.

For **METHOD=WINTERS** or **METHOD=ADDWINTERS**, *n* beginning complete seasonal cycles are used to compute starting values for the trend parameters. For example, for monthly data the seasonal cycle is one year, and **NSTART=2** specifies that the first 24 observations at the beginning of each series are used for the time trend regression used to calculate starting values.

When **NSTART=MAX** is specified, all the observations are used. The default for **METHOD=EXPO** is **NSTART=8**; the default for **METHOD=WINTERS** or **METHOD=ADDWINTERS** is **NSTART=2**. See the section “[Starting Values for EXPO, WINTERS, and ADDWINTERS Methods](#)” on page 876 for details.

NSSTART=*n*

NSSTART=MAX

specifies the number of beginning values of the series to use in calculating starting values for seasonal parameters for **METHOD=WINTERS** or **METHOD=ADDWINTERS**. The seasonal parameters are initialized by averaging over the first *n* values of the series for each season, where *n* is the value of the **NSSTART=** option. When **NSSTART=MAX** is specified, all the observations are used.

If **NSTART=** is specified, but **NSSTART=** is not, **NSSTART=** defaults to the value specified for **NSTART=**. If neither **NSTART=** nor **NSSTART=** is specified, then the default is **NSSTART=2**. This option is ignored if **METHOD=STEPAR** or **METHOD=EXPO**. See the section “[Starting Values for EXPO, WINTERS, and ADDWINTERS Methods](#)” on page 876 for details.

OUT=SAS-data-set

names the output data set to contain the forecasts. If the **OUT=** option is not specified, the data set is named by using the *DATA**n* convention. See the section “[OUTEST= Data Set](#)” on page 880 for details.

OUTACTUAL

writes the actual values to the **OUT=** data set.

OUTALL

provides all the output control options (**OUTLIMIT**, **OUT1STEP**, **OUTACTUAL**, **OUTRESID**, and **OUTSTD**).

OUTEST=SAS-data-set

names an output data set to contain the parameter estimates and goodness-of-fit statistics. When the OUTEST= option is not specified, the parameters and goodness-of-fit statistics are not stored. See the section “[OUTEST= Data Set](#)” on page 880 for details.

OUTESTALL

writes additional statistics to the OUTEST= data set. This option is the same as specifying both OUTESTTHEIL and OUTFITSTATS.

OUTESTTHEIL

writes Theil forecast accuracy statistics to the OUTEST= data set.

OUTFITSTATS

writes various R-square-type forecast accuracy statistics to the OUTEST= data set.

OUTFULL

provides OUTACTUAL, OUT1STEP, and OUTLIMIT output control options in addition to the forecast values.

OUTLIMIT

writes the forecast confidence limits to the OUT= data set.

OUTRESID

writes the residuals (when available) to the OUT= data set.

OUTSTD

writes the standard errors of the forecasts to the OUT= data set.

OUT1STEP

writes the one-step-ahead predicted values to the OUT= data set.

SEASONS=interval

SEASONS= (interval1 [interval2 [interval3]])

SEASONS=n

SEASONS= (n1 [n2 [n3]])

specifies the seasonality for seasonal models. The *interval* can be QTR, MONTH, DAY, or HOUR, or multiples of these (for example, QTR2, MONTH2, MONTH3, MONTH4, MONTH6, HOUR2, HOUR3, HOUR4, HOUR6, HOUR8, and HOUR12).

Alternatively, seasonality can be specified by giving the length of the seasonal cycles. For example, SEASONS=3 means that every group of three observations forms a seasonal cycle. The SEASONS= option is valid only for METHOD=WINTERS or METHOD=ADDWINTERS. See the section “[Specifying Seasonality](#)” on page 877 for details.

SINGULAR=value

gives the criterion for judging singularity. The default depends on the precision of the computer that you run SAS programs on.

SINTPER=m

SINTPER= (*m1* [*m2* [*m3*]])

specifies the number of periods to combine in forming a season. For example, SEASONS=3 SINTPER=2 specifies that each group of two observations forms a season and that the seasonal cycle repeats every six observations. The SINTPER= option is valid only when the SEASONS= option is used. See the section “[Specifying Seasonality](#)” on page 877 for details.

SLENTY=value

controls the significance levels for entry of autoregressive parameters in the STEPARG method. The value of the SLENTY= option must be between 0 and 1. The default is SLENTY=0.2. See the section “[STEPARG Method](#)” on page 869 for details.

SLSTAY=value

controls the significance levels for removal of autoregressive parameters in the STEPARG method. The value of the SLSTAY= option must be between 0 and 1. The default is SLSTAY=0.05. See the section “[STEPARG Method](#)” on page 869 for details.

START=*n*

uses the first *n* observations to fit the model and begins forecasting with the *n* + 1 observation.

TREND=*n*

specifies the degree of the time trend model. The value of the TREND= option must be 1, 2, or 3. TREND=1 selects the constant trend model; TREND=2 selects the linear trend model; and TREND=3 selects the quadratic trend model. The default is TREND=2, except for METHOD=EXPO, for which the default is TREND=3.

WEIGHT=*w***WEIGHT= (*w1* [*w2* [*w3*]])**

specifies the smoothing weights for the EXPO, WINTERS, and ADDWINTERS methods. For the EXPO method, only one weight can be specified. For the WINTERS or ADDWINTERS method, *w1* gives the weight for updating the constant component, *w2* gives the weight for updating the linear and quadratic trend components, and *w3* gives the weight for updating the seasonal component. The *w2* and *w3* values are optional. Each value in the WEIGHT= option must be between 0 and 1. For default values, see the section “[EXPO Method](#)” on page 870 and the section “[WINTERS Method](#)” on page 872.

ZEROMISS

treats zeros at the beginning of a series as missing values. For example, a product can be introduced at a date after the date of the first observation in the data set, and the sales variable for the product can be recorded as zero for the observations prior to the introduction date. The ZEROMISS option says to treat these initial zeros as missing values.

BY Statement

BY *variables* ;

A BY statement can be used with PROC FORECAST to obtain separate analyses on observations in groups defined by the BY variables.

ID Statement

ID *variables* ;

The first variable listed in the ID statement identifies observations in the input and output data sets. Usually, the first ID variable is a SAS date or datetime variable. Its values are interpreted and extrapolated according to the values of the INTERVAL= option. See the section “[Data Periodicity and Time Intervals](#)” on page 868 for details.

If more than one ID variable is specified in the ID statement, only the first is used to identify the observations; the rest are just copied to the OUT= data set and will have missing values for forecast observations.

VAR Statement

VAR *variables* ;

The VAR statement specifies the variables in the input data set that you want to forecast. If no VAR statement is specified, the procedure forecasts all numeric variables except the ID and BY variables.

Details: FORECAST Procedure

Missing Values

The treatment of missing values varies by method. For METHOD=STEPAR, missing values are tolerated in the series; the autocorrelations are estimated from the available data and tapered, if necessary. For the EXPO, WINTERS, and ADDWINTERS methods, missing values after the start of the series are replaced with one-step-ahead predicted values, and the predicted values are applied to the smoothing equations. For the WINTERS method, negative or zero values are treated as missing.

Data Periodicity and Time Intervals

The INTERVAL= option is used to establish the frequency of the time series. For example, INTERVAL=MONTH specifies that each observation in the input data set represents one month. If INTERVAL=MONTH2, each observation represents two months. Thus, there is a two-month time interval between each pair of successive observations, and the data frequency is bimonthly.

See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for details about the interval values supported.

The `INTERVAL=` option is used together with the `ID` statement to fully describe the observations that make up the time series. The first variable specified in the `ID` statement is used to identify the observations. Usually, SAS date or datetime values are used for this variable. PROC FORECAST uses the `ID` variable in the following ways:

- to validate the data periodicity. When the `INTERVAL=` option is specified, the `ID` variable is used to check the data and verify that successive observations have valid `ID` values that correspond to successive time intervals. When the `INTERVAL=` option is not used, PROC FORECAST verifies that the `ID` values are nonmissing and in ascending order. A warning message is printed when an invalid `ID` value is found in the input data set.
- to check for gaps in the input observations. For example, if `INTERVAL=MONTH` and an input observation for January 1970 is followed by an observation for April 1970, there is a gap in the input data, with two observations omitted. When a gap in the input data is found, a warning message is printed, and PROC FORECAST processes missing values for each omitted input observation.
- to label the forecast observations in the output data set. The values of the `ID` variable for the forecast observations after the end of the input data set are extrapolated according to the frequency specifications of the `INTERVAL=` option. If the `INTERVAL=` option is not specified, the `ID` variable is extrapolated by incrementing the `ID` variable value for the last observation in the input data set by the `INTPER=` value, if specified, or by one.

The `ALIGN=` option controls the alignment of SAS dates. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information.

Forecasting Methods

This section explains the forecasting methods used by PROC FORECAST.

STEPAR Method

In the STEPAR method, PROC FORECAST first fits a time trend model to the series and takes the difference between each value and the estimated trend. (This process is called *detrending*.) Then, the remaining variation is fit by using an autoregressive model.

The STEPAR method fits the autoregressive process to the residuals of the trend model by using a backwards-stepping method to select parameters. Because the trend and autoregressive parameters are fit in sequence rather than simultaneously, the parameter estimates are not optimal in a statistical sense. However, the estimates are usually close to optimal, and the method is computationally inexpensive.

The STEPAR Algorithm

The STEPAR method consists of the following computational steps:

1. Fit the trend model as specified by the TREND= option by using ordinary least-squares regression. This step detrends the data. The default trend model for the STEPAR method is TREND=2, a linear trend model.
2. Take the residuals from step 1 and compute the autocovariances to the number of lags specified by the NLAGS= option.
3. Regress the current values against the lags, using the autocovariances from step 2 in a Yule-Walker framework. Do not bring in any autoregressive parameter that is not significant at the level specified by the SLENTY= option. (The default is SLENTY=0.20.) Do not bring in any autoregressive parameter that results in a nonpositive-definite Toeplitz matrix.
4. Find the autoregressive parameter that is least significant. If the significance level is greater than the SLSTAY= value, remove the parameter from the model. (The default is SLSTAY=0.05.) Continue this process until only significant autoregressive parameters remain. If the OUTEST= option is specified, write the estimates to the OUTEST= data set.
5. Generate the forecasts by using the estimated model and output to the OUT= data set. Form the confidence limits by combining the trend variances with the autoregressive variances.

Missing values are tolerated in the series; the autocorrelations are estimated from the available data and tapered if necessary.

This method requires at least three passes through the data: two passes to fit the model and a third pass to initialize the autoregressive process and write to the output data set.

Default Value of the NLAGS= Option

If the NLAGS= option is not specified, the default value of the NLAGS= option is chosen based on the data frequency specified by the INTERVAL= option and on the number of observations in the input data set, if this can be determined in advance. (PROC FORECAST cannot determine the number of input observations before reading the data when a BY statement or a WHERE statement is used or if the data are from a tape format SAS data set or external database. The NLAGS= value must be fixed before the data are processed.)

If the INTERVAL= option is specified, the default NLAGS= value includes lags for up to three years plus one, subject to the maximum of 13 lags or one-third of the number of observations in your data set, whichever is less. If the number of observations in the input data set cannot be determined, the maximum NLAGS= default value is 13. If the INTERVAL= option is not specified, the default is NLAGS=13 or one-third the number of input observations, whichever is less.

If the Toeplitz matrix formed by the autocovariance matrix at a given step is not positive definite, the maximal number of autoregressive lags is reduced.

For example, for INTERVAL=QTR, the default is NLAGS=13 (that is, $4 \times 3 + 1$) provided that there are at least 39 observations. The NLAGS= option default is always at least 3.

EXPO Method

Exponential smoothing is used when the METHOD=EXPO option is specified. The term *exponential smoothing* is derived from the computational scheme developed by Brown and others (Brown and Mey-

ers 1961; Brown 1962). Estimates are computed with updating formulas that are developed across time series in a manner similar to smoothing.

The EXPO method fits a trend model such that the most recent data are weighted more heavily than data in the early part of the series. The weight of an observation is a geometric (exponential) function of the number of periods that the observation extends into the past relative to the current period. The weight function is

$$w_{\tau} = \omega(1 - \omega)^{t-\tau}$$

where τ is the observation number of the past observation, t is the current observation number, and ω is the weighting constant specified with the WEIGHT= option.

You specify the model with the TREND= option as follows:

- TREND=1 specifies single exponential smoothing (a constant model)
- TREND=2 specifies double exponential smoothing (a linear trend model)
- TREND=3 specifies triple exponential smoothing (a quadratic trend model)

Updating Equations

The single exponential smoothing operation is expressed by the formula

$$S_t = \omega x_t + (1 - \omega)S_{t-1}$$

where S_t is the smoothed value at the current period, t is the time index of the current period, and x_t is the current actual value of the series. The smoothed value S_t is the forecast of x_{t+1} and is calculated as the smoothing constant ω times the value of the series, x_t , in the current period plus $(1 - \omega)$ times the previous smoothed value S_{t-1} , which is the forecast of x_t computed at time $t - 1$.

Double and triple exponential smoothing are derived by applying exponential smoothing to the smoothed series, obtaining smoothed values as follows:

$$S_t^{[2]} = \omega S_t + (1 - \omega)S_{t-1}^{[2]}$$

$$S_t^{[3]} = \omega S_t^{[2]} + (1 - \omega)S_{t-1}^{[3]}$$

Missing values after the start of the series are replaced with one-step-ahead predicted values, and the predicted value is then applied to the smoothing equations.

The polynomial time trend parameters CONSTANT, LINEAR, and QUAD in the OUTEST= data set are computed from S_T , $S_T^{[2]}$, and $S_T^{[3]}$, the final smoothed values at observation T , the last observation used to fit the model. In the OUTEST= data set, the values of S_T , $S_T^{[2]}$, and $S_T^{[3]}$ are identified by _TYPE_=S1, _TYPE_=S2, and _TYPE_=S3, respectively.

Smoothing Weights

Exponential smoothing forecasts are forecasts for an integrated moving-average process; however, the weighting parameter is specified by the user rather than estimated from the data. Experience has shown

that good values for the WEIGHT= option are between 0.05 and 0.3. As a general rule, smaller smoothing weights are appropriate for series with a slowly changing trend, while larger weights are appropriate for volatile series with a rapidly changing trend. If unspecified, the weight defaults to $(1 - 0.8^{1/trend})$, where *trend* is the value of the TREND= option. This produces defaults of WEIGHT=0.2 for TREND=1, WEIGHT=0.10557 for TREND=2, and WEIGHT=0.07168 for TREND=3.

The **ESM** procedure can be used to forecast time series by using exponential smoothing with smoothing weights that are optimized automatically. See Chapter 14, “[The ESM Procedure](#).”

The **Time Series Forecasting System** provides for exponential smoothing models and enables you to either specify or optimize the smoothing weights. See Chapter 43, “[Getting Started with Time Series Forecasting](#),” for details.

Confidence Limits

The confidence limits for exponential smoothing forecasts are calculated as they would be for an exponentially weighted time trend regression, using the simplifying assumption of an infinite number of observations. The variance estimate is computed by using the mean square of the unweighted one-step-ahead forecast residuals.

More detailed descriptions of the forecast computations can be found in Montgomery and Johnson (1976) and Brown (1962).

WINTERS Method

The WINTERS method uses updating equations similar to exponential smoothing to fit parameters for the model

$$x_t = (a + bt)s(t) + \epsilon_t$$

where *a* and *b* are the trend parameters and the function *s* (*t*) selects the seasonal parameter for the season that corresponds to time *t*.

The WINTERS method assumes that the series values are positive. If negative or zero values are found in the series, a warning is printed and the values are treated as missing.

The preceding standard WINTERS model uses a linear trend. However, PROC FORECAST can also fit a version of the WINTERS method that uses a quadratic trend. When TREND=3 is specified for METHOD=WINTERS, PROC FORECAST fits the following model:

$$x_t = (a + bt + ct^2)s(t) + \epsilon_t$$

The quadratic trend version of the Winters method is often unstable, and its use is not recommended.

When TREND=1 is specified, the following constant trend version is fit:

$$x_t = as(t) + \epsilon_t$$

The default for the WINTERS method is TREND=2, which produces the standard linear trend model.

Seasonal Factors

The notation $s(t)$ represents the selection of the seasonal factor used for different time periods. For example, if INTERVAL=DAY and SEASONS=MONTH, there are 12 seasonal factors, one for each month in the year, and the time index t is measured in days. For any observation, t is determined by the ID variable and $s(t)$ selects the seasonal factor for the month that t falls in. For example, if t is 9 February 1993 then $s(t)$ is the seasonal parameter for February.

When there are multiple seasons specified, $s(t)$ is the product of the parameters for the seasons. For example, if SEASONS=(MONTH DAY), then $s(t)$ is the product of the seasonal parameter for the month that corresponds to the period t and the seasonal parameter for the day of the week that corresponds to period t . When the SEASONS= option is not specified, the seasonal factors $s(t)$ are not included in the model. See the section “[Specifying Seasonality](#)” on page 877 for more information about specifying multiple seasonal factors.

Updating Equations

This section shows the updating equations for the Winters method. In the following formula, x_t is the actual value of the series at time t ; a_t is the smoothed value of the series at time t ; b_t is the smoothed trend at time t ; c_t is the smoothed quadratic trend at time t ; $s_{t-1}(t)$ selects the old value of the seasonal factor that corresponds to time t before the seasonal factors are updated.

The estimates of the constant, linear, and quadratic trend parameters are updated by using the following equations:

For TREND=3,

$$a_t = \omega_1 \frac{x_t}{s_{t-1}(t)} + (1 - \omega_1)(a_{t-1} + b_{t-1} + c_{t-1})$$

$$b_t = \omega_2(a_t - a_{t-1} + c_{t-1}) + (1 - \omega_2)(b_{t-1} + 2c_{t-1})$$

$$c_t = \omega_2 \frac{1}{2}(b_t - b_{t-1}) + (1 - \omega_2)c_{t-1}$$

For TREND=2,

$$a_t = \omega_1 \frac{x_t}{s_{t-1}(t)} + (1 - \omega_1)(a_{t-1} + b_{t-1})$$

$$b_t = \omega_2(a_t - a_{t-1}) + (1 - \omega_2)b_{t-1}$$

For TREND=1,

$$a_t = \omega_1 \frac{x_t}{s_{t-1}(t)} + (1 - \omega_1)a_{t-1}$$

In this updating system, the trend polynomial is always centered at the current period so that the intercept parameter of the trend polynomial for predicted values at times after t is always the updated intercept parameter a_t . The predicted value for τ periods ahead is

$$x_{t+\tau} = (a_t + b_t \tau) s_t(t + \tau)$$

The seasonal parameters are updated when the season changes in the data, using the mean of the ratios of the actual to the predicted values for the season. For example, if SEASONS=MONTH and INTERVAL=DAY, then when the observation for the first of February is encountered, the seasonal parameter for January is updated by using the formula

$$s_t(t-1) = \omega_3 \frac{1}{31} \sum_{i=t-31}^{t-1} \frac{x_i}{a_i} + (1 - \omega_3)s_{t-1}(t-1)$$

where t is February 1 of the current year, $s_t(t-1)$ is the seasonal parameter for January updated with the data available at time t , and $s_{t-1}(t-1)$ is the seasonal parameter for January of the previous year.

When multiple seasons are used, $s_t(t)$ is a product of seasonal factors. For example, if SEASONS=(MONTH DAY) then $s_t(t)$ is the product of the seasonal factors for the month and for the day of the week: $s_t(t) = s_t^m(t)s_t^d(t)$.

The factor $s_t^m(t)$ is updated at the start of each month by using a modification of the preceding formula that adjusts for the presence of the other seasonal by dividing the summands $\frac{x_i}{a_i}$ by the that corresponds to day of the week effect $s_i^d(i)$.

Similarly, the factor $s_t^d(t)$ is updated by using the following formula:

$$s_t^d(t) = \omega_3 \frac{x_t}{a_t s_t^m(t)} + (1 - \omega_3)s_{t-1}^d(t)$$

where $s_{t-1}^d(t)$ is the seasonal factor for the same day of the previous week.

Missing values after the start of the series are replaced with one-step-ahead predicted values, and the predicted value is substituted for x_i and applied to the updating equations.

Normalization

The parameters are normalized so that the seasonal factors for each cycle have a mean of 1.0. This normalization is performed after each complete cycle and at the end of the data. Thus, if INTERVAL=MONTH and SEASONS=MONTH are specified and a series begins with a July value, then the seasonal factors for the series are normalized at each observation for July and at the last observation in the data set. The normalization is performed by dividing each of the seasonal parameters, and multiplying each of the trend parameters, by the mean of the unnormalized seasonal parameters.

Smoothing Weights

The weight for updating the seasonal factors, ω_3 , is given by the third value specified in the WEIGHT= option. If the WEIGHT= option is not used, then ω_3 defaults to 0.25; if the WEIGHT= option is used but does not specify a third value, then ω_3 defaults to ω_2 . The weight for updating the linear and quadratic trend parameters, ω_2 , is given by the second value specified in the WEIGHT= option; if the WEIGHT= option does not specify a second value, then ω_2 defaults to ω_1 . The updating weight for the constant parameter, ω_1 , is given by the first value specified in the WEIGHT= option. As a general rule, smaller smoothing weights are appropriate for series with a slowly changing trend, while larger weights are appropriate for volatile series with a rapidly changing trend.

If the WEIGHT= option is not used, then ω_1 defaults to $(1 - 0.8^{1/trend})$, where *trend* is the value of the TREND= option. This produces defaults of WEIGHT=0.2 for TREND=1, WEIGHT=0.10557 for TREND=2, and WEIGHT=0.07168 for TREND=3.

The ESM procedure and the Time Series Forecasting System provide for generating forecast models that use Winters Method and enable you to specify or optimize the weights. (See Chapter 14, “The ESM Procedure,” and Chapter 43, “Getting Started with Time Series Forecasting,” for details.)

Confidence Limits

A method for calculating exact forecast confidence limits for the WINTERS method is not available. Therefore, the approach taken in PROC FORECAST is to assume that the true seasonal factors have small variability about a set of fixed seasonal factors and that the remaining variation of the series is small relative to the mean level of the series. The equations are written

$$s_t(t) = I(t)(1 + \delta_t)$$

$$x_t = \mu I(t)(1 + \gamma_t)$$

$$a_t = \xi(1 + \alpha_t)$$

where μ is the mean level and $I(t)$ are the fixed seasonal factors. Assuming that α_t and δ_t are small, the forecast equations can be linearized and only first-order terms in δ_t and α_t kept. In terms of forecasts for γ_t , this linearized system is equivalent to a seasonal ARIMA model. Confidence limits for γ_t are based on this ARIMA model and converted into confidence limits for x_t using $s_t(t)$ as estimates of $I(t)$.

The exponential smoothing confidence limits are based on an approximation to a weighted regression model, whereas the preceding Winters confidence limits are based on an approximation to an ARIMA model. You can use METHOD=WINTERS without the SEASONS= option to do exponential smoothing and get confidence limits for the EXPO forecasts based on the ARIMA model approximation. These are generally more pessimistic than the weighted regression confidence limits produced by METHOD=EXPO.

ADDWINTERS Method

The ADDWINTERS method is like the WINTERS method except that the seasonal parameters are added to the trend instead of multiplied with the trend. The default TREND=2 model is as follows:

$$x_t = a + bt + s(t) + \epsilon_t$$

The WINTERS method for updating equation and confidence limits calculations described in the preceding section are modified accordingly for the additive version.

Holt Two-Parameter Exponential Smoothing

If the seasonal factors are omitted (that is, if the SEASONS= option is not specified), the WINTERS (and ADDWINTERS) method reduces to the Holt two-parameter version of exponential smoothing. Thus, the WINTERS method is often referred to as the Holt-Winters method.

Double exponential smoothing is a special case of the Holt two-parameter smoother. The double exponential smoothing results can be duplicated with METHOD=WINTERS by omitting the SEASONS= option and appropriately setting the WEIGHT= option. Letting $\alpha = \omega(2 - \omega)$ and $\beta = \omega/(2 - \omega)$, the following statements produce the same forecasts:

```
proc forecast method=expo trend=2 weight= $\omega$  ...;

proc forecast method=winters trend=2 weight=( $\alpha, \beta$ ) ...;
```

Although the forecasts are the same, the confidence limits are computed differently.

Choice of Weights for EXPO, WINTERS, and ADDWINTERS Methods

For the EXPO, WINTERS, and ADDWINTERS methods, properly chosen smoothing weights are of critical importance in generating reasonable results. There are several factors to consider in choosing the weights.

The noisier the data, the lower should be the weight given to the most recent observation. Another factor to consider is how quickly the mean of the time series is changing. If the mean of the series is changing rapidly, relatively more weight should be given to the most recent observation. The more stable the series over time, the lower should be the weight given to the most recent observation.

Note that the smoothing weights should be set separately for each series; weights that produce good results for one series might be poor for another series. Since PROC FORECAST does not have a feature to use different weights for different series, when forecasting multiple series with the EXPO, WINTERS, or ADDWINTERS method it might be desirable to use different PROC FORECAST steps with different WEIGHT= options.

For the Winters method, many combinations of weight values might produce unstable *noninvertible* models, even though all three weights are between 0 and 1. When the model is noninvertible, the forecasts depend strongly on values in the distant past, and predictions are determined largely by the starting values. Unstable models usually produce poor forecasts. The Winters model can be unstable even if the weights are optimally chosen to minimize the in-sample MSE. See Archibald (1990) for a detailed discussion of the unstable region of the parameter space of the Winters model.

Optimal weights and forecasts for exponential smoothing models can be computed by using the [ESM](#) and [ARIMA](#) procedures and by the [Time Series Forecasting System](#).

Starting Values for EXPO, WINTERS, and ADDWINTERS Methods

The exponential smoothing method requires starting values for the smoothed values S_0 , $S_0^{[2]}$, and $S_0^{[3]}$. The Winters and additive Winters methods require starting values for the trend coefficients and seasonal factors.

By default, starting values for the trend parameters are computed by a time trend regression over the first few observations for the series. Alternatively, you can specify the starting value for the trend parameters with the ASTART=, BSTART=, and CSTART= options.

The number of observations used in the time trend regression for starting values depends on the NSTART= option. For METHOD=EXPO, NSTART= beginning values of the series are used, and the coefficients of the time trend regression are then used to form the initial smoothed values S_0 , $S_0^{[2]}$, and $S_0^{[3]}$.

For METHOD=WINTERS or METHOD=ADDWINTERS, n complete seasonal cycles are used to compute starting values for the trend parameter, where n is the value of the NSTART= option. For example, for monthly data the seasonal cycle is one year, so NSTART=2 specifies that the first 24 observations at the beginning of each series are used for the time trend regression used to calculate starting values.

The starting values for the seasonal factors for the WINTERS and ADDWINTERS methods are computed from seasonal averages over the first few complete seasonal cycles at the beginning of the series. The number of seasonal cycles averaged to compute starting seasonal factors is controlled by the NSSTART= option. For example, for monthly data with SEASONS=12 or SEASONS=MONTH, the first n January values are averaged to get the starting value for the January seasonal parameter, where n is the value of the NSSTART= option.

The $s_0(i)$ seasonal parameters are set to the ratio (for WINTERS) or difference (for ADDWINTERS) of the mean for the season to the overall mean for the observations used to compute seasonal starting values.

For example, if METHOD=WINTERS, INTERVAL=DAY, SEASON=(MONTH DAY), and NSTART=2 (the default), the initial seasonal parameter for January is the ratio of the mean value over days in the first two Januarys after the start of the series (that is, after the first nonmissing value) to the mean value for all days read for initialization of the seasonal factors. Likewise, the initial factor for Sundays is the ratio of the mean value for Sundays to the mean of all days read.

For the ASTART=, BSTART=, and CSTART= options, the values specified are associated with the variables in the VAR statement in the order in which the variables are listed (the first value with the first variable, the second value with the second variable, and so on). If there are fewer values than variables, default starting values are used for the later variables. If there are more values than variables, the extra values are ignored.

Specifying Seasonality

Seasonality of a time series is a regular fluctuation about a trend. This is called seasonality because the time of year is the most common source of periodic variation. For example, sales of home heating oil are regularly greater in winter than during other times of the year.

Seasonality can be caused by many things other than weather. In the United States, sales of nondurable goods are greater in December than in other months because of the Christmas shopping season. The term seasonality is also used for cyclical fluctuation at periods other than a year. Often, certain days of the week cause regular fluctuation in daily time series, such as increased spending on leisure activities during weekends.

Three kinds of seasonality are supported in PROC FORECAST: time-of-year, day-of-week, and time-of-day. The seasonal part of the model is specified by using the SEASONS= option. The values for the SEASONS= option are listed in [Table 16.2](#).

Table 16.2 The SEASONS= Option

SEASONS= Value	Cycle Length	Type of Seasonality
QTR	yearly	time of year
MONTH	yearly	time of year
DAY	weekly	day of week
HOURL	daily	time of day

The three kinds of seasonality can be combined. For example, SEASONS=(MONTH DAY HOUR) specifies that 24 hour-of-day seasons are nested within 7 day-of-week seasons, which in turn are nested within 12 month-of-year seasons. The different kinds of intervals can be listed in the SEASONS= option in any order. Thus, SEASONS=(HOURL DAY MONTH) is the same as SEASONS=(MONTH DAY HOUR). Note that the Winters method smoothing equations might be less stable when multiple seasonal factors are used.

Multiple period seasons can also be used. For example, SEASONS=QTR2 specifies two semiannual time-of-year seasons. The grouping of observations into multiple period seasons starts with the first interval in the seasonal cycle. Thus, MONTH2 seasons are January–February, March–April, and so on. (There is no provision for shifting seasonal intervals; thus, there is no way to specify seasons December–January, February–March, April–May, and so on.)

For multiple period seasons, the number of intervals combined to form the seasons must evenly divide and be less than the basic cycle length. For example, with SEASONS=MONTH n , the basic cycle length is 12, so MONTH2, MONTH3, MONTH4, and MONTH6 are valid SEASONS= values (because 2, 3, 4, and 6 evenly divide 12 and are less than 12), but MONTH5 and MONTH12 are not valid SEASONS= values.

The frequency of the seasons must not be greater than the frequency of the input data. For example, you cannot specify SEASONS=MONTH if INTERVAL=QTR or SEASONS=MONTH if INTERVAL=MONTH2. You also cannot specify two seasons of the same basic cycle. For example, SEASONS=(MONTH QTR) or SEASONS=(MONTH2 MONTH4) is not allowed.

Alternatively, the seasonality can be specified by giving the number of seasons in the SEASONS= option. SEASONS= n specifies that there are n seasons, with observations 1, $n + 1$, $2n + 1$, and so on in the first season, observations 2, $n + 2$, $2n + 2$, and so on in the second season, and so forth.

The options SEASONS= n and SINTPER= m cause PROC FORECAST to group the input observations into n seasons, with m observations to a season, which repeat every nm observations. The options SEASONS=($n_1 n_2$) and SINTPER=($m_1 m_2$) produce n_1 seasons with m_1 observations to a season nested within n_2 seasons with $n_1 m_1 m_2$ observations to a season.

If the SINTPER= m option is used with the SEASONS= option, the SEASONS= interval is multiplied by the SINTPER= value. For example, specifying both SEASONS=(QTR HOURL) and SINTPER=(2 3) is the same as specifying SEASONS=(QTR2 HOURL3) and also the same as specifying SEASONS=(HOURL3 QTR2).

Data Requirements

You should have ample data for the series that you forecast by using PROC FORECAST. However, the results might be poor unless you have a good deal more than the minimum amount of data the procedure allows. The minimum number of observations required for the different methods is as follows:

- If METHOD=STEPAR is used, the minimum number of nonmissing observations required for each series forecast is the TREND= option value plus the value of the NLAGS= option. For example, using NLAGS=13 and TREND=2, at least 15 nonmissing observations are needed.
- If METHOD=EXPO is used, the minimum is the TREND= option value.
- If METHOD=WINTERS or ADDWINTERS is used, the minimum number of observations is either the number of observations in a complete seasonal cycle or the TREND= option value, whichever is greater. (However, there should be data for several complete seasonal cycles, or the seasonal factor estimates might be poor.) For example, for the seasonal specifications SEASONS=MONTH, SEASONS=(QTR DAY), or SEASONS=(MONTH DAY HOUR), the longest cycle length is one year, so at least one year of data is required. At least two years of data is recommended.

OUT= Data Set

The FORECAST procedure writes the forecast to the output data set named by the OUT= option. The OUT= data set contains the following variables:

- the BY variables
- _TYPE_, a character variable that identifies the type of observation
- _LEAD_, a numeric variable that indicates the number of steps ahead in the forecast. The value of _LEAD_ is 0 for the one-step-ahead forecasts before the start of the forecast period.
- the ID statement variables
- the VAR statement variables, which contain the result values as indicated by the _TYPE_ variable value for the observation

The FORECAST procedure processes each of the input variables listed in the VAR statement and writes several observations for each forecast period to the OUT= data set. The observations are identified by the value of the _TYPE_ variable. The options OUTACTUAL, OUTALL, OUTLIMIT, OUTRESID, OUT1STEP, OUTFULL, and OUTSTD control which types of observations are included in the OUT= data set.

The values of the variable _TYPE_ are as follows:

ACTUAL	The VAR statement variables contain actual values from the input data set. The OUTACTUAL option writes the actual values. By default, only the observations for the forecast period are output.
--------	---

FORECAST	The VAR statement variables contain forecast values. The OUT1STEP option writes the one-step-ahead predicted values for the observations used to fit the model.
RESIDUAL	The VAR statement variables contain residuals. The residuals are computed by subtracting the forecast value from the actual value ($residual = actual - forecast$). The OUTRESID option writes observations for the residuals.
Lnn	The VAR statement variables contain lower <i>nn</i> % confidence limits for the forecast values for the future observations specified by the LEAD= option. The value of <i>nn</i> depends on the ALPHA= option; with the default ALPHA=0.05, the _TYPE_ value is L95 for the lower confidence limit observations. The OUTLIMIT option writes observations for the upper and lower confidence limits.
Unn	The VAR statement variables contain upper <i>nn</i> % confidence limits for the forecast values for the future observations specified by the LEAD= option. The value of <i>nn</i> depends on the ALPHA= option; with the default ALPHA=0.05, the _TYPE_ value is U95 for the upper confidence limit observations. The OUTLIMIT option writes observations for the upper and lower confidence limits.
STD	The VAR statement variables contain standard errors of the forecast values. The OUTSTD option writes observations for the standard errors of the forecast.

If no output control options are specified, PROC FORECAST outputs only the forecast values for the forecast periods.

The _TYPE_ variable can be used to subset the OUT= data set. For example, the following data step splits the OUT= data set into two data sets, one that contains the forecast series and the other that contains the residual series. For example

```
proc forecast out=out outresid ...;
    ...
run;

data fore resid;
    set out;
    if _TYPE_='FORECAST' then output fore;
    if _TYPE_='RESIDUAL' then output resid;
run;
```

See Chapter 3, “Working with Time Series Data,” for more information about processing time series data sets in this format.

OUTEST= Data Set

The FORECAST procedure writes the parameter estimates and goodness-of-fit statistics to an output data set when the OUTEST= option is specified. The OUTEST= data set contains the following variables:

- the BY variables

- the first ID variable, which contains the value of the ID variable for the last observation in the input data set used to fit the model
- `_TYPE_`, a character variable that identifies the type of each observation
- the VAR statement variables, which contain statistics and parameter estimates for the input series. The values contained in the VAR statement variables depend on the `_TYPE_` variable value for the observation.

The observations contained in the OUTEST= data set are identified by the `_TYPE_` variable. The OUTEST= data set might contain observations with the following `_TYPE_` values:

AR1–AR n	The observation contains estimates of the autoregressive parameters for the series. Two-digit lag numbers are used if the value of the NLAGS= option is 10 or more; in that case these <code>_TYPE_</code> values are AR01–AR n . These observations are output for the STEPAR method only.
CONSTANT	The observation contains the estimate of the constant or intercept parameter for the time trend model for the series. For the exponential smoothing and the Winters' methods, the trend model is centered (that is, $t = 0$) at the last observation used for the fit.
LINEAR	The observation contains the estimate of the linear or slope parameter for the time trend model for the series. This observation is output only if you specify TREND=2 or TREND=3.
N	The observation contains the number of nonmissing observations used to fit the model for the series.
QUAD	The observation contains the estimate of the quadratic parameter for the time trend model for the series. This observation is output only if you specify TREND=3.
SIGMA	The observation contains the estimate of the standard deviation of the error term for the series.
S1–S3	The observations contain exponentially smoothed values at the last observation. <code>_TYPE_=S1</code> is the final smoothed value of the single exponential smooth. <code>_TYPE_=S2</code> is the final smoothed value of the double exponential smooth. <code>_TYPE_=S3</code> is the final smoothed value of the triple exponential smooth. These observations are output for METHOD=EXPO only.
S _{name}	<p>The observation contains estimates of the seasonal parameters. For example, if SEASONS=MONTH, the OUTEST= data set contains observations with <code>_TYPE_=S_JAN</code>, <code>_TYPE_=S_FEB</code>, <code>_TYPE_=S_MAR</code>, and so forth.</p> <p>For multiple-period seasons, the names of the first and last interval of the season are concatenated to form the season name. Thus, for SEASONS=MONTH4, the OUTEST= data set contains observations with <code>_TYPE_=S_JANAPR</code>, <code>_TYPE_=S_MAYAUG</code>, and <code>_TYPE_=S_SEPDEC</code>.</p> <p>When the SEASONS= option specifies numbers, the seasonal factors are labeled <code>_TYPE_=S_i_j</code>. For example, SEASONS=(2 3) produces observations with <code>_TYPE_</code> values of S₁₁, S₁₂, S₂₁, S₂₂, and S₂₃. The observation with <code>_TYPE_=S_i_j</code> contains the seasonal parameters for the jth season of the ith seasonal cycle.</p> <p>These observations are output only for METHOD=WINTERS or METHOD=ADDWINTERS.</p>

WEIGHT	The observation contains the smoothing weight used for exponential smoothing. This is the value of the WEIGHT= option. This observation is output for METHOD=EXPO only.
WEIGHT1	
WEIGHT2	
WEIGHT3	The observations contain the weights used for smoothing the WINTERS or ADDWINTERS method parameters (specified by the WEIGHT= option). _TYPE_=WEIGHT1 is the weight used to smooth the CONSTANT parameter. _TYPE_=WEIGHT2 is the weight used to smooth the LINEAR and QUAD parameters. _TYPE_=WEIGHT3 is the weight used to smooth the seasonal parameters. These observations are output only for the WINTERS and ADDWINTERS methods.
NRESID	The observation contains the number of nonmissing residuals, n , used to compute the goodness-of-fit statistics. The residuals are obtained by subtracting the one-step-ahead predicted values from the observed values.
SST	The observation contains the total sum of squares for the series, corrected for the mean. $SST = \sum_{t=1}^n (y_t - \bar{y})^2$, where \bar{y} is the series mean.
SSE	The observation contains the sum of the squared residuals, uncorrected for the mean. $SSE = \sum_{t=1}^n (y_t - \hat{y}_t)^2$, where \hat{y} is the one-step predicted value for the series.
MSE	The observation contains the mean squared error, calculated from one-step-ahead forecasts. $MSE = \frac{1}{n-k} SSE$, where k is the number of parameters in the model.
RMSE	The observation contains the root mean squared error. $RMSE = \sqrt{MSE}$.
MAPE	The observation contains the mean absolute percent error. $MAPE = \frac{100}{n} \sum_{t=1}^n (y_t - \hat{y}_t)/y_t $.
MPE	The observation contains the mean percent error. $MPE = \frac{100}{n} \sum_{t=1}^n (y_t - \hat{y}_t)/y_t$.
MAE	The observation contains the mean absolute error. $MAE = \frac{1}{n} \sum_{t=1}^n y_t - \hat{y}_t $.
ME	The observation contains the mean error. $MAE = \frac{1}{n} \sum_{t=1}^n (y_t - \hat{y}_t)$.
MAXE	The observation contains the maximum error (the largest residual).
MINE	The observation contains the minimum error (the smallest residual).
MAXPE	The observation contains the maximum percent error.
MINPE	The observation contains the minimum percent error.
RSQUARE	The observation contains the R square statistic, $R^2 = 1 - SSE/SST$. If the model fits the series badly, the model error sum of squares SSE might be larger than SST and the R square statistic will be negative.
ADJRSQ	The observation contains the adjusted R square statistic. $ADJRSQ = 1 - (\frac{n-1}{n-k})(1 - R^2)$.
ARSQ	The observation contains Amemiya's adjusted R square statistic. $ARSQ = 1 - (\frac{n+k}{n-k})(1 - R^2)$.

RW_RSQ	<p>The observation contains the random walk R square statistic (Harvey's R_D^2 statistic that uses the random walk model for comparison).</p> $RW_RSQ = 1 - (\frac{n-1}{n})SSE/RWSSE,$ <p>where $RWSSE = \sum_{t=2}^n (y_t - y_{t-1} - \mu)^2$ and $\mu = \frac{1}{n-1} \sum_{t=2}^n (y_t - y_{t-1})$.</p>
AIC	<p>The observation contains Akaike's information criterion.</p> $AIC = n\ln(SSE/n) + 2k.$
SBC	<p>The observation contains Schwarz's Bayesian criterion.</p> $SBC = n\ln(SSE/n) + k\ln(n).$
APC	<p>The observation contains Amemiya's prediction criterion.</p> $APC = \frac{1}{n} SST(\frac{n+k}{n-k})(1 - R^2) = (\frac{n+k}{n-k})\frac{1}{n}SSE.$
CORR	<p>The observation contains the correlation coefficient between the actual values and the one-step-ahead predicted values.</p>
THEILU	<p>The observation contains Theil's U statistic that uses original units. See Maddala (1977, pp. 344–345), and Pindyck and Rubinfeld (1981, pp. 364–365) for more information about Theil statistics.</p>
RTHEILU	<p>The observation contains Theil's U statistic calculated using relative changes.</p>
THEILUM	<p>The observation contains the bias proportion of Theil's U statistic.</p>
THEILUS	<p>The observation contains the variance proportion of Theil's U statistic.</p>
THEILUC	<p>The observation contains the covariance proportion of Theil's U statistic.</p>
THEILUR	<p>The observation contains the regression proportion of Theil's U statistic.</p>
THEILUD	<p>The observation contains the disturbance proportion of Theil's U statistic.</p>
RTHEILUM	<p>The observation contains the bias proportion of Theil's U statistic, calculated by using relative changes.</p>
RTHEILUS	<p>The observation contains the variance proportion of Theil's U statistic, calculated by using relative changes.</p>
RTHEILUC	<p>The observation contains the covariance proportion of Theil's U statistic, calculated by using relative changes.</p>
RTHEILUR	<p>The observation contains the regression proportion of Theil's U statistic, calculated by using relative changes.</p>
RTHEILUD	<p>The observation contains the disturbance proportion of Theil's U statistic, calculated by using relative changes.</p>

Examples: FORECAST Procedure

Example 16.1: Forecasting Auto Sales

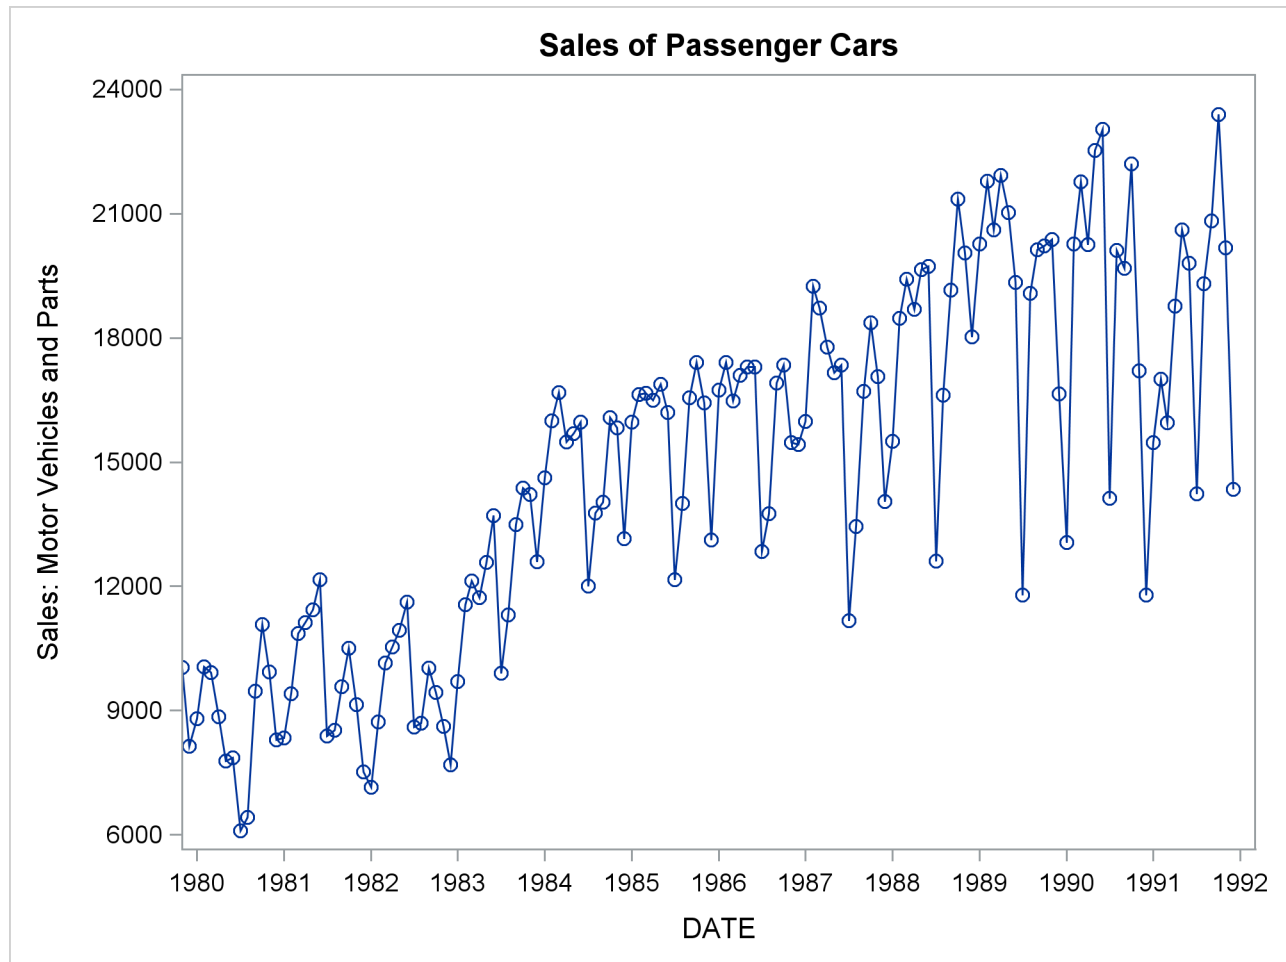
This example uses the Winters method to forecast the monthly U. S. sales of passenger cars series (VEHICLES) from the data set SASHELP.USECON. These data are taken from *Business Statistics*, published by the U. S. Bureau of Economic Analysis.

The following statements plot the series. The plot is shown in [Output 16.1.1](#).

```
title1 "Sales of Passenger Cars";

symbol1 i=spline v=dot;
axis2 label=(a=-90 r=90 "Vehicles and Parts" )
      order=(6000 to 24000 by 3000);

title1 "Sales of Passenger Cars";
proc sgplot data=sashelp.usecon;
  series x=date y=vehicles / markers;
  xaxis values=('1jan80'd to '1jan92'd by year);
  yaxis values=(6000 to 24000 by 3000);
  format date year4.;
run;
```

Output 16.1.1 Monthly Passenger Car Sales

The following statements produce the forecast:

```
proc forecast data=sashelp.usecon interval=month
              method=winters seasons=month lead=12
              out=out outfull outresid outest=est;
  id date;
  var vehicles;
  where date >= '1jan80'd;
run;
```

The `INTERVAL=MONTH` option indicates that the data are monthly, and the `ID DATE` statement gives the dating variable. The `METHOD=WINTERS` specifies the Winters smoothing method. The `LEAD=12` option forecasts 12 months ahead. The `OUT=OUT` option specifies the output data set, while the `OUTFULL` and `OUTRESID` options include in the `OUT=` data set the predicted and residual values for the historical period and the confidence limits for the forecast period. The `OUTEST=` option stores various statistics in an output data set. The `WHERE` statement is used to include only data from 1980 on.

The following statements print the `OUT=` data set (first 20 observations):

```
title2 'The OUT= Data Set';
```

```
proc print data=out (obs=20) noobs;
run;
```

The listing of the output data set produced by PROC PRINT is shown in part in [Output 16.1.2](#).

Output 16.1.2 The OUT= Data Set Produced by PROC FORECAST (First 20 Observations)

Sales of Passenger Cars The OUT= Data Set			
DATE	_TYPE_	_LEAD_	VEHICLES
JAN80	ACTUAL	0	8808.00
JAN80	FORECAST	0	8046.52
JAN80	RESIDUAL	0	761.48
FEB80	ACTUAL	0	10054.00
FEB80	FORECAST	0	9284.31
FEB80	RESIDUAL	0	769.69
MAR80	ACTUAL	0	9921.00
MAR80	FORECAST	0	10077.33
MAR80	RESIDUAL	0	-156.33
APR80	ACTUAL	0	8850.00
APR80	FORECAST	0	9737.21
APR80	RESIDUAL	0	-887.21
MAY80	ACTUAL	0	7780.00
MAY80	FORECAST	0	9335.24
MAY80	RESIDUAL	0	-1555.24
JUN80	ACTUAL	0	7856.00
JUN80	FORECAST	0	9597.50
JUN80	RESIDUAL	0	-1741.50
JUL80	ACTUAL	0	6102.00
JUL80	FORECAST	0	6833.16

The following statements print the OUTEST= data set:

```
title2 'The OUTEST= Data Set: WINTERS Method';
proc print data=est;
run;
```

The PROC PRINT listing of the OUTEST= data set is shown in [Output 16.1.3](#).

Output 16.1.3 The OUTEST= Data Set Produced by PROC FORECAST

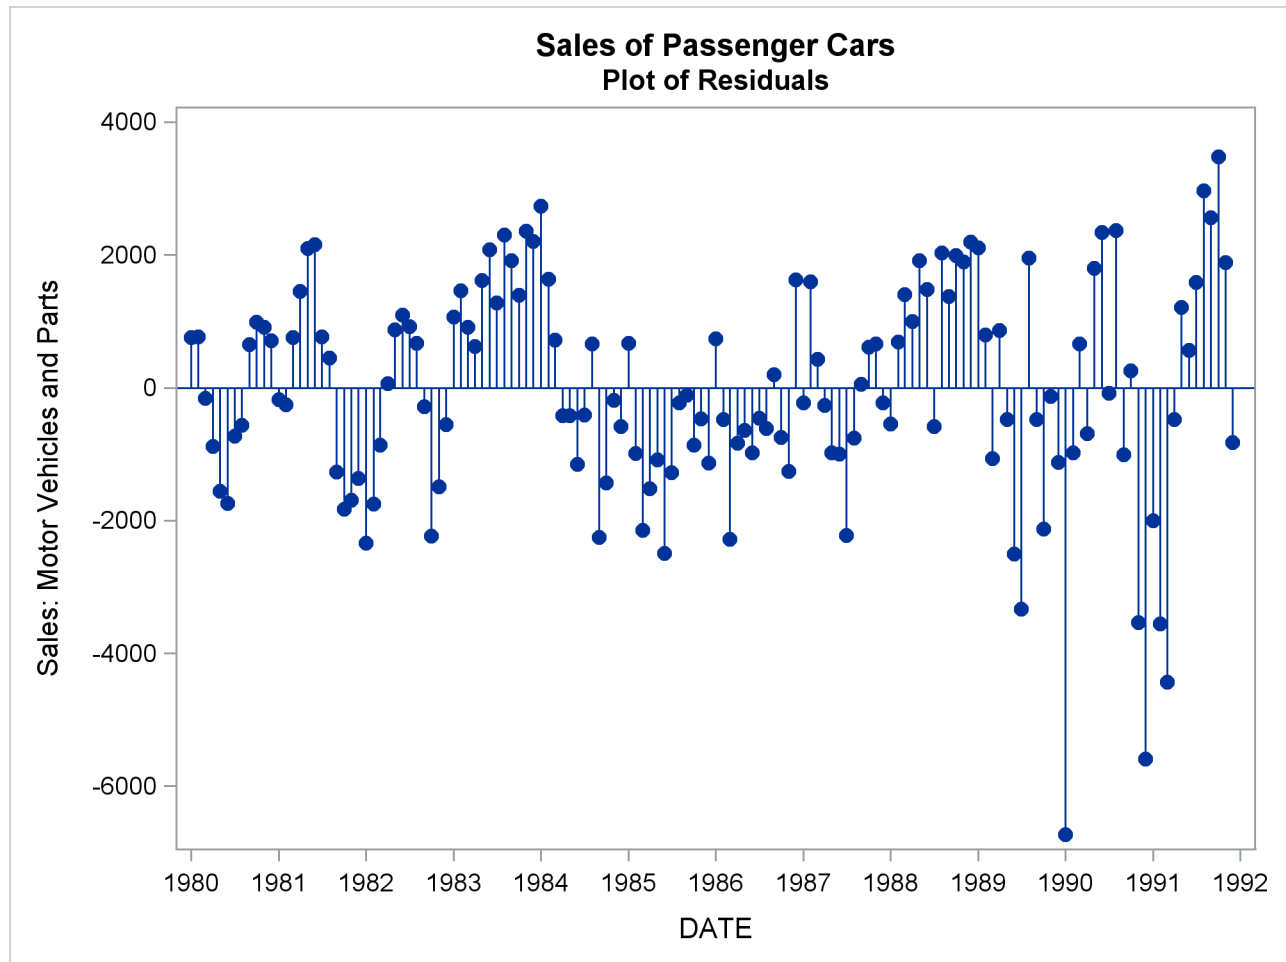
Sales of Passenger Cars			
The OUTEST= Data Set: WINTERS Method			
Obs	_TYPE_	DATE	VEHICLES
1	N	DEC91	144
2	NRESID	DEC91	144
3	DF	DEC91	130
4	WEIGHT1	DEC91	0.1055728
5	WEIGHT2	DEC91	0.1055728
6	WEIGHT3	DEC91	0.25
7	SIGMA	DEC91	1741.481
8	CONSTANT	DEC91	18577.368
9	LINEAR	DEC91	4.804732
10	S_JAN	DEC91	0.8909173
11	S_FEB	DEC91	1.0500278
12	S_MAR	DEC91	1.0546539
13	S_APR	DEC91	1.074955
14	S_MAY	DEC91	1.1166121
15	S_JUN	DEC91	1.1012972
16	S_JUL	DEC91	0.7418297
17	S_AUG	DEC91	0.9633888
18	S_SEP	DEC91	1.051159
19	S_OCT	DEC91	1.1399126
20	S_NOV	DEC91	1.0132126
21	S_DEC	DEC91	0.802034
22	SST	DEC91	2.63312E9
23	SSE	DEC91	394258270
24	MSE	DEC91	3032755.9
25	RMSE	DEC91	1741.481
26	MAPE	DEC91	9.4800217
27	MPE	DEC91	-1.049956
28	MAE	DEC91	1306.8534
29	ME	DEC91	-42.95376
30	RSQUARE	DEC91	0.8502696

The following statements plot the residuals. The plot is shown in [Output 16.1.4](#).

```

title1 "Sales of Passenger Cars";
title2 'Plot of Residuals';
proc sgplot data=out;
  where _type_ = 'RESIDUAL';
  needle x=date y=vehicles / markers markerattrs=(symbol=circlefilled);
  xaxis values=('1jan80'd to '1jan92'd by year);
  format date year4.;
run;

```

Output 16.1.4 Residuals from Winters Method

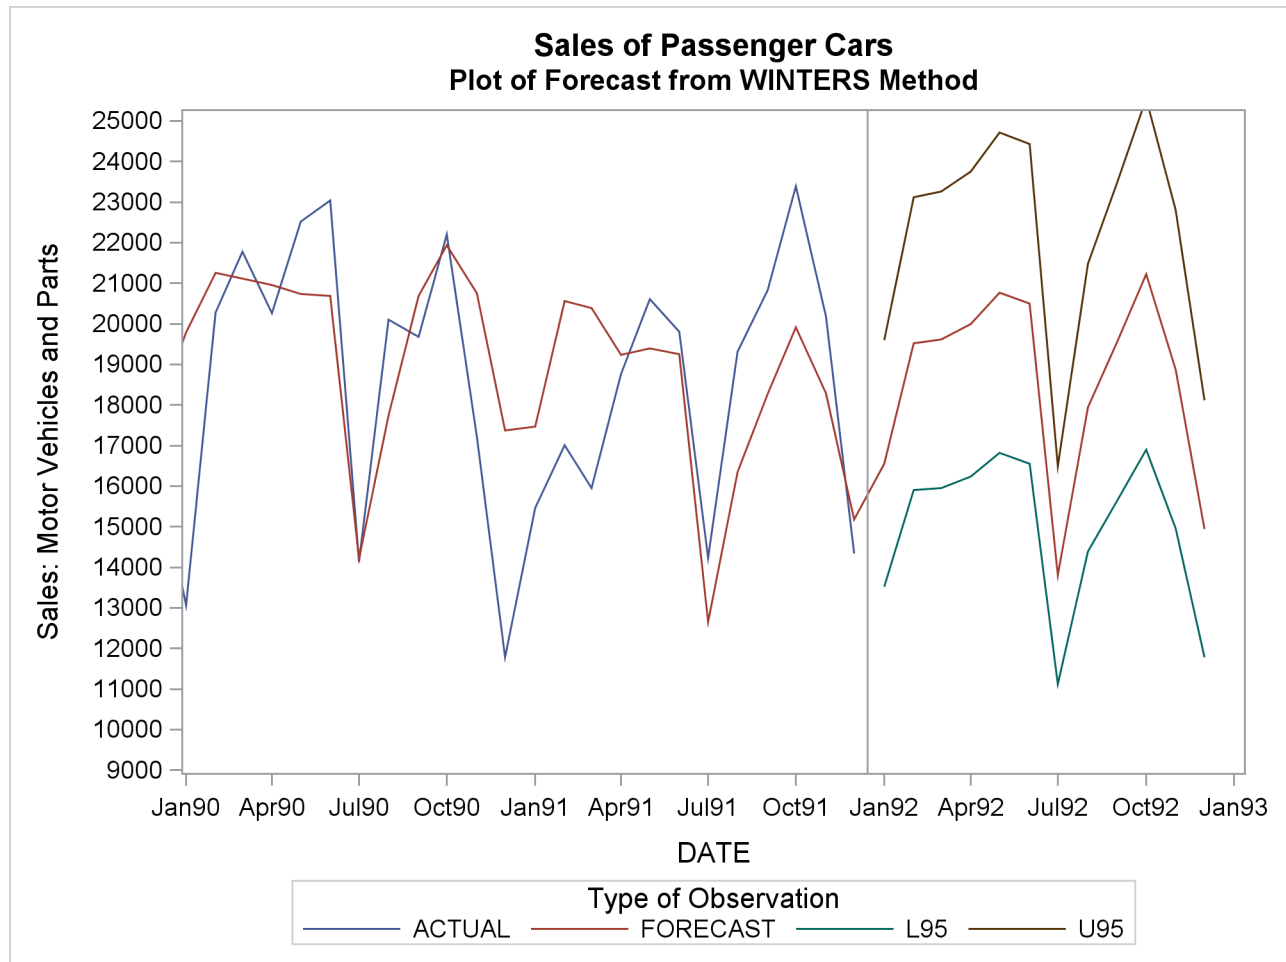
The following statements plot the forecast and confidence limits. The last two years of historical data are included in the plot to provide context for the forecast plot. A reference line is drawn at the start of the forecast period.

```

title1 "Sales of Passenger Cars";
title2 'Plot of Forecast from WINTERS Method';
proc sgplot data=out;
  series x=date y=vehicles / group=_type_ lineattrs=(pattern=1);
  where _type_ ^= 'RESIDUAL';
  refline '15dec91'd / axis=x;
  yaxis values=(9000 to 25000 by 1000);
  xaxis values=('1jan90'd to '1jan93'd by qtr);
run;

```

The plot is shown in [Output 16.1.5](#).

Output 16.1.5 Forecast of Passenger Car Sales**Example 16.2: Forecasting Retail Sales**

This example uses the stepwise autoregressive method to forecast the monthly U. S. sales of durable goods (DURABLES) and nondurable goods (NONDUR) from the SASHELP.USECON data set. The data are from *Business Statistics*, published by the U.S. Bureau of Economic Analysis. The following statements plot the series:

```

title1 'Sales of Durable and Nondurable Goods';
title2 'Plot of Forecast from WINTERS Method';
proc sgplot data=sashelp.usecon;
    series x=date y=durables / markers markerattrs=(symbol=circlefilled);
    xaxis values=('1jan80'd to '1jan92'd by year);
    yaxis values=(60000 to 150000 by 10000);
    format date year4.;
run;

title1 'Sales of Durable and Nondurable Goods';
title2 'Plot of Forecast from WINTERS Method';

```

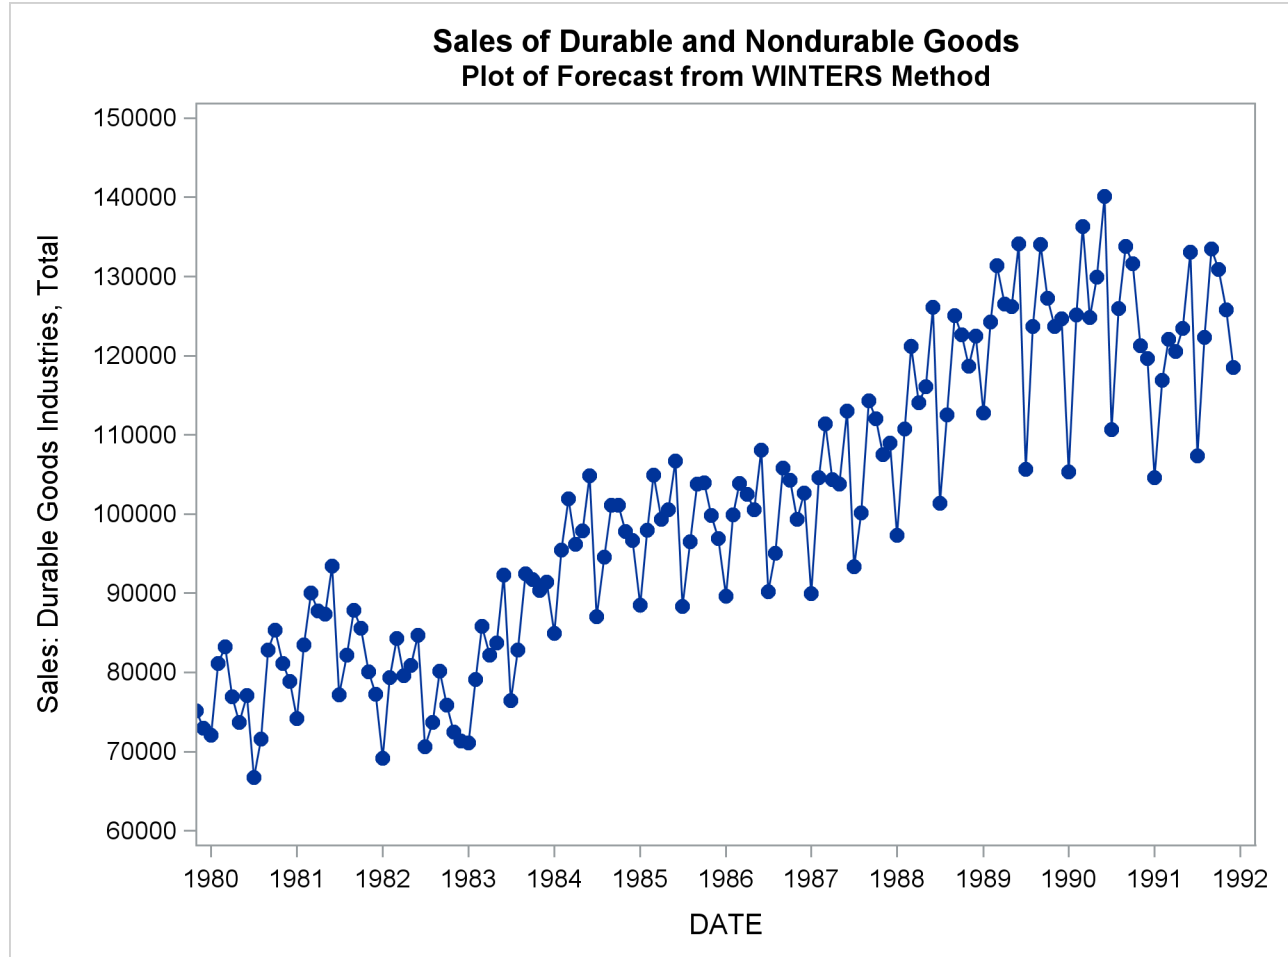
```

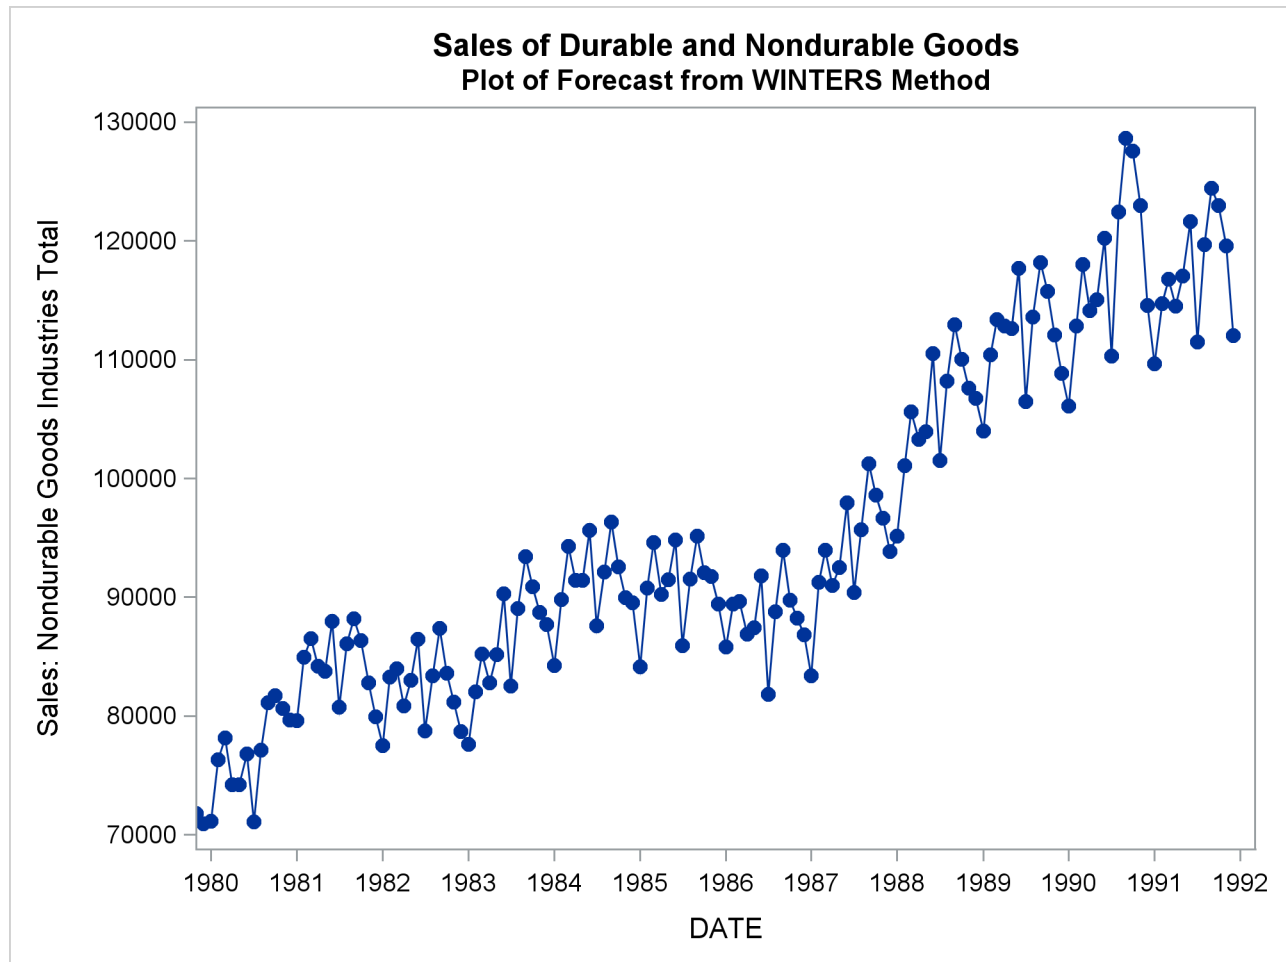
proc sgplot data=sashelp.usecon;
  series x=date y=nondur / markers markerattrs=(symbol=circlefilled);
  xaxis values=('1jan80'd to '1jan92'd by year);
  yaxis values=(70000 to 130000 by 10000);
  format date year4.;
run;

```

The plots are shown in [Output 16.2.1](#) and [Output 16.2.2](#).

Output 16.2.1 Durable Goods Sales



Output 16.2.2 Nondurable Goods Sales

The following statements produce the forecast:

```

title1 "Forecasting Sales of Durable and Nondurable Goods";

proc forecast data=sashelp.usecon interval=month
              method=stepar trend=2 lead=12
              out=out outfull outest=est;
  id date;
  var durables nondur;
  where date >= '1jan80'd;
run;

```

The following statements print the OUTEST= data set.

```

title2 'OUTEST= Data Set: STEP Method';
proc print data=est;
run;

```

The PROC PRINT listing of the OUTEST= data set is shown in [Output 16.2.3](#).

Output 16.2.3 The OUTEST= Data Set Produced by PROC FORECAST

Forecasting Sales of Durable and Nondurable Goods				
OUTEST= Data Set: STEPARE Method				
Obs	_TYPE_	DATE	DURABLES	NONDUR
1	N	DEC91	144	144
2	NRESID	DEC91	144	144
3	DF	DEC91	137	139
4	SIGMA	DEC91	4519.451	2452.2642
5	CONSTANT	DEC91	71884.597	73190.812
6	LINEAR	DEC91	400.90106	308.5115
7	AR01	DEC91	0.5844515	0.8243265
8	AR02	DEC91	.	.
9	AR03	DEC91	.	.
10	AR04	DEC91	.	.
11	AR05	DEC91	.	.
12	AR06	DEC91	0.2097977	.
13	AR07	DEC91	.	.
14	AR08	DEC91	.	.
15	AR09	DEC91	.	.
16	AR10	DEC91	-0.119425	.
17	AR11	DEC91	.	.
18	AR12	DEC91	0.6138699	0.8050854
19	AR13	DEC91	-0.556707	-0.741854
20	SST	DEC91	4.923E10	2.8331E10
21	SSE	DEC91	1.88157E9	544657337
22	MSE	DEC91	13734093	3918398.1
23	RMSE	DEC91	3705.9538	1979.4944
24	MAPE	DEC91	2.9252601	1.6555935
25	MPE	DEC91	-0.253607	-0.085357
26	MAE	DEC91	2866.675	1532.8453
27	ME	DEC91	-67.87407	-29.63026
28	RSQUARE	DEC91	0.9617803	0.9807752

The following statements plot the forecasts and confidence limits. The last two years of historical data are included in the plots to provide context for the forecast. A reference line is drawn at the start of the forecast period.

```

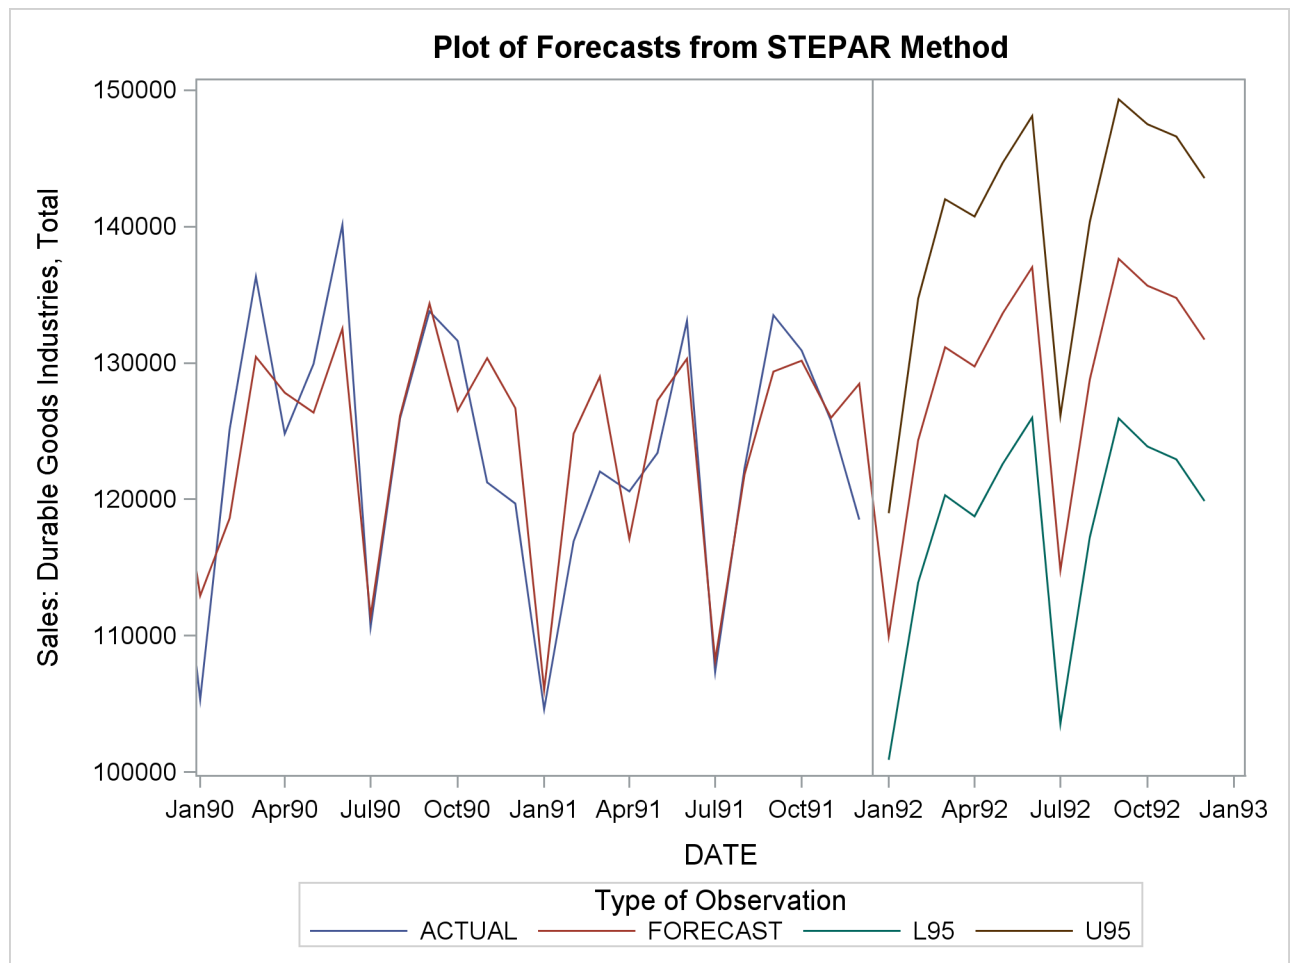
title1 'Plot of Forecasts from STEPARE Method';
proc sgplot data=out;
  series x=date y=durables / group=_type_;
  xaxis values=('1jan90'd to '1jan93'd by qtr);
  yaxis values=(100000 to 150000 by 10000);
  refline '15dec91'd / axis=x;
run;

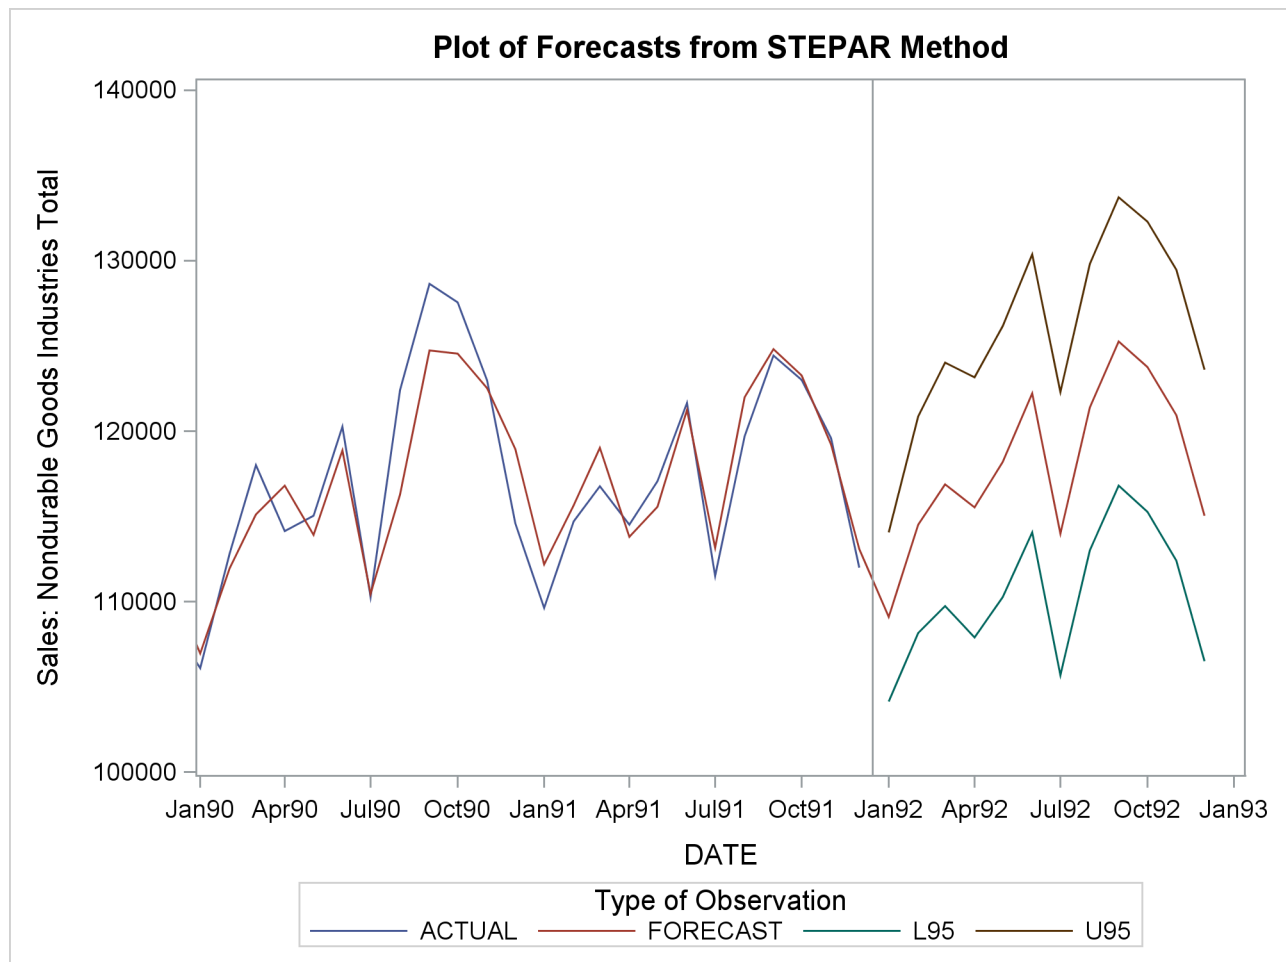
proc sgplot data=out;
  series x=date y=nondur / group=_type_;
  xaxis values=('1jan90'd to '1jan93'd by qtr);
  yaxis values=(100000 to 140000 by 10000);
  refline '15dec91'd / axis=x;
run;

```

The plots are shown in [Output 16.2.4](#) and [Output 16.2.5](#).

Output 16.2.4 Forecast of Durable Goods Sales



Output 16.2.5 Forecast of Nondurable Goods Sales**Example 16.3: Forecasting Petroleum Sales**

This example uses the double exponential smoothing method to forecast the monthly U. S. sales of petroleum and related products series (PETROL) from the data set SASHELP.USECON. These data are taken from *Business Statistics*, published by the U.S. Bureau of Economic Analysis.

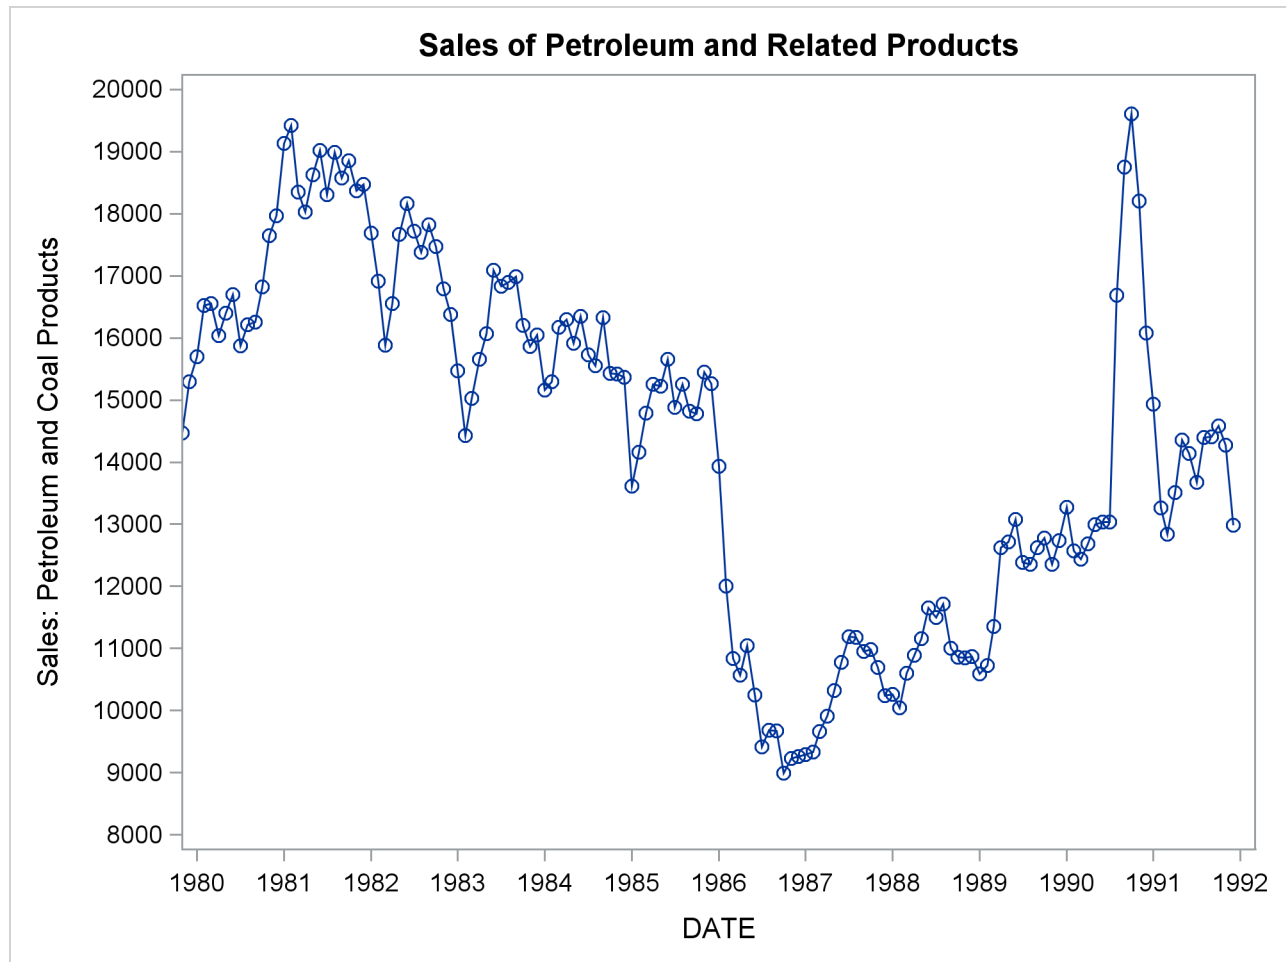
The following statements plot the PETROL series:

```

title1 "Sales of Petroleum and Related Products";
proc sgplot data=sashelp.usecon;
  series x=date y=petrol / markers;
  xaxis values=('1jan80'd to '1jan92'd by year);
  yaxis values=(8000 to 20000 by 1000);
  format date year4.;
run;

```

The plot is shown in [Output 16.3.1](#).

Output 16.3.1 Sales of Petroleum and Related Products

The following statements produce the forecast:

```
proc forecast data=sashelp.usecon interval=month
              method=expo trend=2 lead=12
              out=out outfull outest=est;
  id date;
  var petrol;
  where date >= '1jan80'd;
run;
```

The following statements print the OUTEST= data set:

```
title2 'OUTEST= Data Set: EXPO Method';
proc print data=est;
run;
```

The PROC PRINT listing of the output data set is shown in [Output 16.3.2](#).

Output 16.3.2 The OUTEST= Data Set Produced by PROC FORECAST

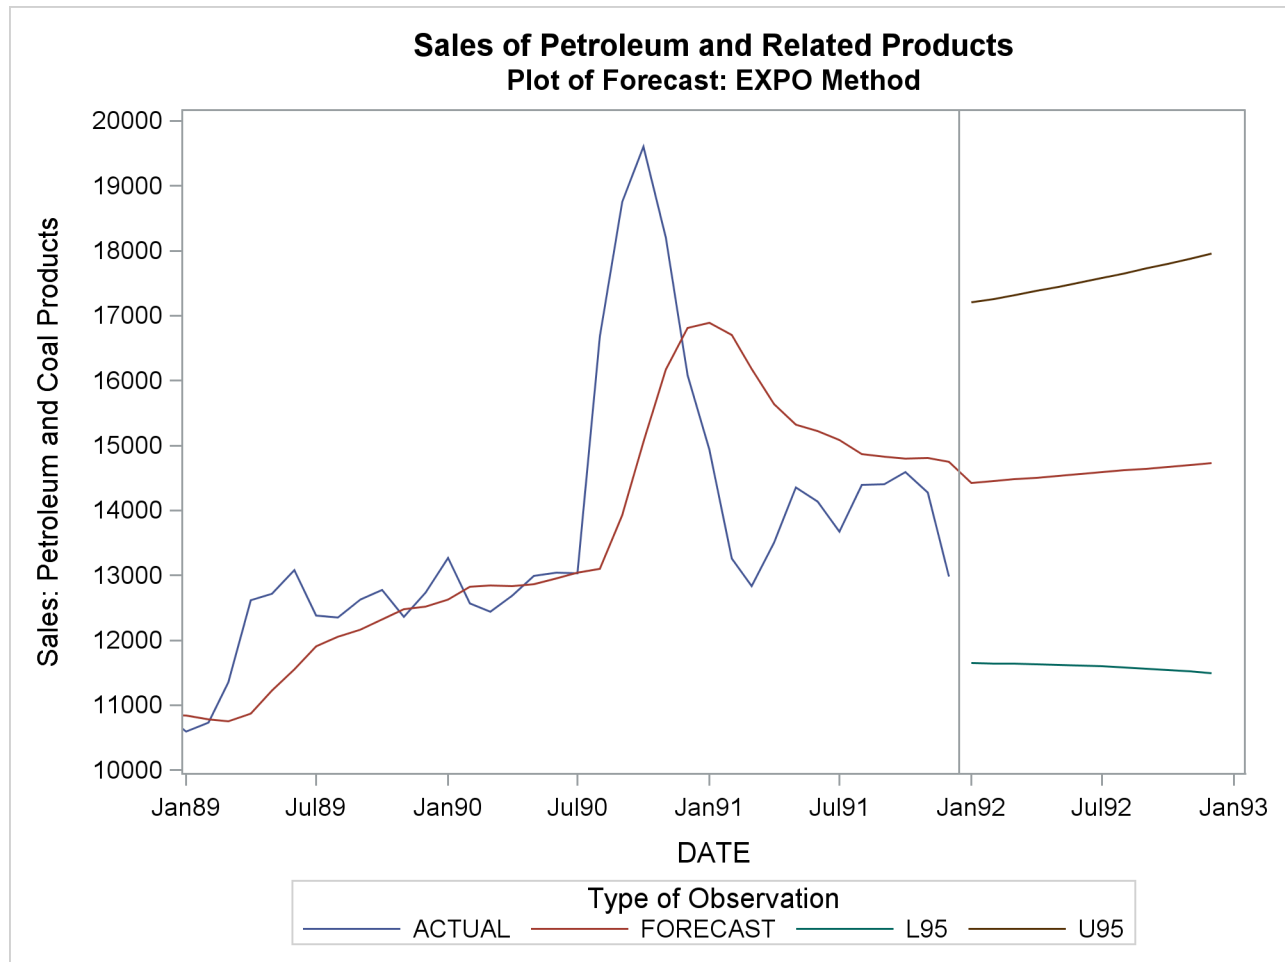
Sales of Petroleum and Related Products			
OUTEST= Data Set: EXPO Method			
Obs	_TYPE_	DATE	PETROL
1	N	DEC91	144
2	NRESID	DEC91	144
3	DF	DEC91	142
4	WEIGHT	DEC91	0.1055728
5	S1	DEC91	14165.259
6	S2	DEC91	13933.435
7	SIGMA	DEC91	1281.0945
8	CONSTANT	DEC91	14397.084
9	LINEAR	DEC91	27.363164
10	SST	DEC91	1.17001E9
11	SSE	DEC91	233050838
12	MSE	DEC91	1641203.1
13	RMSE	DEC91	1281.0945
14	MAPE	DEC91	6.5514467
15	MPE	DEC91	-0.147168
16	MAE	DEC91	891.04243
17	ME	DEC91	8.2148584
18	RSQUARE	DEC91	0.8008122

The plot of the forecast is shown in [Output 16.3.3](#).

```

title1 "Sales of Petroleum and Related Products";
title2 'Plot of Forecast: EXPO Method';
proc sgplot data=out;
  series x=date y=petrol / group=_type_;
  xaxis values=('1jan89'd to '1jan93'd by qtr);
  yaxis values=(10000 to 20000 by 1000);
  refline '15dec91'd / axis=x;
run;

```

Output 16.3.3 Forecast of Petroleum and Related Products

References

- Ahlburg, D. A. (1984). "Forecast Evaluation and Improvement Using Theil's Decomposition," *Journal of Forecasting*, 3, 345–351.
- Aldrin, M. and Damsleth, E. (1989). "Forecasting Non-Seasonal Time Series with Missing Observations," *Journal of Forecasting*, 8, 97–116.
- Archibald, B.C. (1990), "Parameter Space of the Holt-Winters' Model," *International Journal of Forecasting*, 6, 199–209.
- Bails, D.G. and Peppers, L.C. (1982), *Business Fluctuations: Forecasting Techniques and Applications*, New Jersey: Prentice-Hall.
- Bartolomei, S.M. and Sweet, A.L. (1989). "A Note on the Comparison of Exponential Smoothing Methods for Forecasting Seasonal Series," *International Journal of Forecasting*, 5, 111–116.

Bureau of Economic Analysis, U.S. Department of Commerce (1992 and earlier editions), *Business Statistics*, 27th and earlier editions, Washington: U.S. Government Printing Office.

Bliemel, F. (1973). "Theil's Forecast Accuracy Coefficient: A Clarification," *Journal of Marketing Research*, 10, 444–446.

Bowerman, B.L. and O'Connell, R.T. (1979), *Time Series and Forecasting: An Applied Approach*, North Scituate, Massachusetts: Duxbury Press.

Box, G.E.P. and Jenkins, G.M. (1976), *Time Series Analysis: Forecasting and Control*, Revised Edition, San Francisco: Holden-Day.

Bretschneider, S.I., Carbone, R., and Longini, R.L. (1979). "An Adaptive Approach to Time Series Forecasting," *Decision Sciences*, 10, 232–244.

Brown, R.G. (1962), *Smoothing, Forecasting and Prediction of Discrete Time Series*, New York: Prentice-Hall.

Brown, R.G. and Meyer, R.F. (1961). "The Fundamental Theorem of Exponential Smoothing," *Operations Research*, 9, 673–685.

Chatfield, C. (1978). "The Holt-Winters Forecasting Procedure," *Applied Statistics*, 27, 264–279.

Chatfield, C., and Prothero, D.L. (1973). "Box-Jenkins Seasonal Forecasting: Problems in a Case Study," *Journal of the Royal Statistical Society, Series A*, 136, 295–315.

Chow, W.M. (1965). "Adaptive Control of the Exponential Smoothing Constant," *Journal of Industrial Engineering*, September–October 1965.

Cogger, K.O. (1974). "The Optimality of General-Order Exponential Smoothing," *Operations Research*, 22, 858–.

Cox, D. R. (1961). "Prediction by Exponentially Weighted Moving Averages and Related Methods," *Journal of the Royal Statistical Society, Series B*, 23, 414–422.

Fair, R.C. (1986). "Evaluating the Predictive Accuracy of Models," In *Handbook of Econometrics*, Vol. 3., Griliches, Z. and Intriligator, M.D., eds. New York: North Holland.

Fildes, R. (1979). "Quantitative Forecasting—The State of the Art: Extrapolative Models," *Journal of Operational Research Society*, 30, 691–710.

Gardner, E.S. (1984). "The Strange Case of the Lagging Forecasts," *Interfaces*, 14, 47–50.

Gardner, E.S., Jr. (1985). "Exponential Smoothing: The State of the Art," *Journal of Forecasting*, 4, 1–38.

Granger, C.W.J. and Newbold, P. (1977), *Forecasting Economic Time Series*, New York: Academic Press, Inc.

Harvey, A.C. (1984). "A Unified View of Statistical Forecasting Procedures," *Journal of Forecasting*, 3, 245–275.

- Ledolter, J. and Abraham, B. (1984). "Some Comments on the Initialization of Exponential Smoothing," *Journal of Forecasting*, 3, 79–84.
- Maddala, G.S. (1977), *Econometrics*, New York: McGraw-Hill.
- Makridakis, S., Wheelwright, S.C., and McGee, V.E. (1983). *Forecasting: Methods and Applications*, 2nd Ed. New York: John Wiley and Sons.
- McKenzie, Ed (1984). "General Exponential Smoothing and the Equivalent ARMA Process," *Journal of Forecasting*, 3, 333–344.
- Montgomery, D.C. and Johnson, L.A. (1976), *Forecasting and Time Series Analysis*, New York: McGraw-Hill.
- Muth, J.F. (1960). "Optimal Properties of Exponentially Weighted Forecasts," *Journal of the American Statistical Association*, 55, 299–306.
- Pierce, D.A. (1979). " R^2 Measures for Time Series," *Journal of the American Statistical Association*, 74, 901–910.
- Pindyck, R.S. and Rubinfeld, D.L. (1981), *Econometric Models and Economic Forecasts*, Second Edition, New York: McGraw-Hill.
- Raine, J.E. (1971). "Self-Adaptive Forecasting Reconsidered," *Decision Sciences*, 2, 181–191.
- Roberts, S.A. (1982). "A General Class of Holt-Winters Type Forecasting Models," *Management Science*, 28, 808–820.
- Theil, H. (1966). *Applied Economic Forecasting*. Amsterdam: North Holland.
- Trigg, D.W., and Leach, A.G. (1967). "Exponential Smoothing with an Adaptive Response Rate," *Operational Research Quarterly*, 18, 53–59.
- Winters, P.R. (1960). "Forecasting Sales by Exponentially Weighted Moving Averages," *Management Science*, 6, 324–342.

Chapter 17

The LOAN Procedure

Contents

Overview: LOAN Procedure	902
Getting Started: LOAN Procedure	902
Analyzing Fixed Rate Loans	903
Analyzing Balloon Payment Loans	904
Analyzing Adjustable Rate Loans	905
Analyzing Buydown Rate Loans	906
Loan Repayment Schedule	907
Loan Comparison	909
Syntax: LOAN Procedure	912
Functional Summary	912
PROC LOAN Statement	914
FIXED Statement	915
BALLOON Statement	919
ARM Statement	919
BUYDOWN Statement	922
COMPARE Statement	922
Details: LOAN Procedure	924
Computational Details	924
Loan Comparison Details	926
OUT= Data Set	927
OUTCOMP= Data Set	927
OUTSUM= Data Set	928
Printed Output	929
ODS Table Names	930
Examples: LOAN Procedure	931
Example 17.1: Discount Points for Lower Interest Rates	931
Example 17.2: Refinancing a Loan	933
Example 17.3: Prepayments on a Loan	936
Example 17.4: Output Data Sets	937
Example 17.5: Piggyback Loans	940
References	942

Overview: LOAN Procedure

The LOAN procedure analyzes and compares fixed rate, adjustable rate, buydown, and balloon payment loans. The LOAN procedure computes the loan parameters and outputs the loan summary information for each loan.

Multiple loan specifications can be processed and compared in terms of economic criteria such as after-tax or before-tax present worth of cost and true interest rate, breakeven of periodic payment and of interest paid, and outstanding balance at different periods in time. PROC LOAN selects the best alternative in terms of the specified economic criterion for each loan comparison period.

The LOAN procedure allows various payment and compounding intervals (including continuous compounding) and uniform or lump sum prepayments for a loan. Down payments, discount points, and other initialization costs can be included in the loan analysis and comparison.

The LOAN procedure does not support an input data set. All loans analyzed are specified with statements in the PROC LOAN step. The SAS DATA step provides a function MORT that can be used for data-driven analysis of many fixed-rate mortgage or installment loans. However, the MORT function supports only simple fixed rate loans.

Getting Started: LOAN Procedure

PROC LOAN supports four types of loans. You specify each type of loan with the corresponding statement: FIXED, BALLOON, ARM, and BUYDOWN.

- **FIXED**—Fixed rate loans have a constant interest rate and periodic payment throughout the life of the loan.
- **BALLOON**—Balloon payment loans are fixed rate loans with lump sum payments in certain payment periods in addition to the constant periodic payment.
- **ARM**—Adjustable rate loans are those in which the interest rate and periodic payment vary over the life of the loan. The future interest rates of an adjustable rate loan are not known with certainty, but they will vary within specified limits according to terms stated in the loan agreement. In practice, the rate adjustment terms vary. PROC LOAN offers a flexible set of options to capture a wide variety of rate adjustment terms.
- **BUYDOWN**—Buydown rate loans are similar to adjustable rate loans, but the interest rate adjustments are predetermined at the initialization of the loan, usually by paying interest points at the time of loan initialization.

Analyzing Fixed Rate Loans

The most common loan analysis is the calculation of the periodic payment when the loan amount, life, and interest rate are known. The following PROC LOAN statements analyze a 15-year (180 monthly payments) fixed rate loan for \$100,000 with an annual nominal interest rate of 7.5%:

```
proc loan;
    fixed amount=100000 rate=7.5 life=180;
run;
```

Another parameter the PROC LOAN statement can compute is the maximum amount you can borrow given the periodic payment you can afford and the rates available in the market. The following SAS statements analyze a loan for 180 monthly payments of \$900, with a nominal annual rate of 7.5%, and compute the maximum amount that can be borrowed:

```
proc loan;
    fixed payment=900 rate=7.5 life=180;
run;
```

Assume that you want to borrow \$100,000 and can pay \$900 a month. You know that the lender charges a 7.5% nominal interest rate compounded monthly. To determine how long it will take you to pay off your debt, use the following statements:

```
proc loan;
    fixed amount=100000 payment=900 rate=7.5;
run;
```

Sometimes, a loan is expressed in terms of the amount borrowed and the amount and number of periodic payments. In this case, you want to calculate the annual nominal rate charged on the loan to compare it to other alternatives. The following statements analyze a loan of \$100,000 paid in 180 monthly payments of \$800:

```
proc loan;
    fixed amount=100000 payment=800 life=180;
run;
```

There are four basic parameters that define a loan: life (number of periodic payments), principal amount, interest rate, and the periodic payment amount. PROC LOAN calculates the missing parameter among these four. Loan analysis output includes a loan summary table and an amortization schedule.

You can use the START= and LABEL= options to enhance your output. The START= option specifies the date of loan initialization and dates all the output accordingly. The LABEL= specification is used to label all output that corresponds to a particular loan; it is especially useful when multiple loans are analyzed. For example, the preceding statements for the first fixed rate loan are revised to include the START= and LABEL= options as follows:

```
proc loan start=1998:12;
    fixed amount=100000 rate=7.5 life=180
        label='BANK1, Fixed Rate';
run;
```

Loan Summary Table

The loan summary table is produced by default and contains loan analysis information. It shows the principal amount, the costs at the time of loan initialization (down payment, discount points, and other loan initialization costs), the total payment and interest, the initial nominal and effective interest rates, payment and compounding intervals, the length of the loan in the time units specified, the start and end dates (if specified), a list of nominal and effective interest rates, and periodic payments throughout the life of the loan.

Figure 17.1 shows the loan summary table for the fixed rate loan labeled “BANK1, Fixed Rate.”

Figure 17.1 Fixed Rate Loan Summary

The LOAN Procedure			
Fixed Rate Loan Summary			
BANK1, Fixed Rate			
Downpayment	0.00	Principal Amount	100000.00
Initialization	0.00	Points	0.00
Total Interest	66862.61	Nominal Rate	7.5000%
Total Payment	166862.61	Effective Rate	7.7633%
Pay Interval	MONTHLY	Compounding	MONTHLY
No. of Payments	180	No. of Compoundings	180
Start Date	DEC1998	End Date	DEC2013
Rates and Payments for BANK1, Fixed Rate			
Date	Nominal Rate	Effective Rate	Payment
DEC1998	7.5000%	7.7633%	927.01

The loan is initialized in December 1998 and paid off in December 2013. The monthly payment is calculated to be \$927.01, and the effective interest rate is 7.7633%. Over the 15 years, \$66,862.61 is paid for interest charges on the loan.

Analyzing Balloon Payment Loans

You specify balloon payment loans like fixed rate loans, with the additional specification of the balloon payments. Assume you have an alternative to finance the \$100,000 investment with a 15-year balloon payment loan. The annual nominal rate is 7.5%, as in the fixed rate loan. The terms of the loan require two

balloon payments of \$2000 and \$1000 at the 15th and 48th payment periods, respectively. These balloon payments keep the periodic payment lower than that of the fixed rate loan. The balloon payment loan is defined by the following BALLOON statement:

```
proc loan start=1998:12;
    balloon amount=100000 rate=7.5 life=180
        balloonpayment=(15=2000 48=1000)
        label = 'BANK2, with Balloon Payment';
run;
```

List of Balloon Payments

In addition to the information for the fixed rate loan, the “Loan Summary Table” for the balloon payment loan includes a list of balloon payments in the list of rates and payments. For example, the balloon payment loan described previously includes two balloon payments, as shown in [Figure 17.2](#).

Figure 17.2 List of Rates and Payments for a Balloon Payment Loan

The LOAN Procedure			
Rates and Payments for BANK2, with Balloon Payment			
Date	Nominal Rate	Effective Rate	Payment
DEC1998	7.5000%	7.7633%	903.25
	Balloon Period	Payment	
	MAR2000	2000.00	
	DEC2002	1000.00	

The periodic payment for the balloon payment loan is \$23.76 less than that of the fixed rate loan.

Analyzing Adjustable Rate Loans

In addition to specifying the basic loan parameters, you need to specify the terms of the rate adjustments for an adjustable rate loan. There are many ways of stating the rate adjustment terms, and PROC LOAN facilitates all of them. For details, see the section “[Rate Adjustment Terms Options](#)” on page 920.

Assume that you have an alternative to finance the \$100,000 investment with a 15-year adjustable rate loan with an initial annual nominal interest rate of 5.5%. The rate adjustment terms specify a 0.5% annual cap, a 2.5% life cap, and a rate adjustment every 12 months. *Annual cap* refers to the maximum increase in interest rate per adjustment period, and *life cap* refers to the maximum increase over the life of the loan. The following ARM statement specifies this adjustable rate loan by assuming the interest rate adjustments will always increase by the maximum allowed by the terms of the loan. These assumptions are specified by the WORSTCASE and CAPS= options, as shown in the following statements:

```
proc loan start=1998:12;
    arm amount=100000 rate=5.5 life=180 worstcase
        caps=(0.5, 2.5)
        label='BANK3, Adjustable Rate';
run;
```

List of Rates and Payments for Adjustable Rate Loans

The list of rates and payments in the loan summary table for the adjustable rate loans reflects the changes in the interest rates and payments and the dates these changes become effective. For the adjustable rate loan described previously, Figure 17.3 shows the list of rates and payments that indicate five annual rate adjustments in addition to the initial rate and payment.

Figure 17.3 List of Rates and Payments for an Adjustable Rate Loan

The LOAN Procedure			
Rates and Payments for BANK3, Adjustable Rate			
Date	Nominal Rate	Effective Rate	Payment
DEC1998	5.5000%	5.6408%	817.08
JAN2000	6.0000%	6.1678%	842.33
JAN2001	6.5000%	6.6972%	866.44
JAN2002	7.0000%	7.2290%	889.32
JAN2003	7.5000%	7.7633%	910.88
JAN2004	8.0000%	8.3000%	931.03

Notice that the periodic payment of the adjustable rate loan as of January 2004 (\$931.03) exceeds that of the fixed rate loan (\$927.01).

Analyzing Buydown Rate Loans

A 15-year buydown rate loan is another alternative to finance the \$100,000 investment. The nominal annual interest rate is 6.5% initially and will increase to 8% and 9% as of the 24th and 48th payment periods, respectively. The nominal annual interest rate is lower than that of the fixed rate alternative, at the cost of a 1% discount point (\$1000) paid at the initialization of the loan. The following BUYDOWN statement represents this loan alternative:

```
proc loan start=1998:12;
    buydown amount=100000 rate=6.5 life=180
        buydownrates=(24=8 48=9) pointpct=1
        label='BANK4, Buydown';
run;
```

List of Rates and Payments for Buydown Rate Loans

Figure 17.4 shows the list of rates and payments in the loan summary table. It reflects the two rate adjustments and the corresponding monthly payments as well as the initial values for these parameters. As of December 2000, the periodic payment of the buydown loan exceeds the periodic payment for any of the other alternatives.

Figure 17.4 List of Rates and Payments for a Buydown Rate Loan

The LOAN Procedure			
Rates and Payments for BANK4, Buydown			
Date	Nominal Rate	Effective Rate	Payment
DEC1998	6.5000%	6.6972%	871.11
DEC2000	8.0000%	8.3000%	946.50
DEC2002	9.0000%	9.3807%	992.01

Loan Repayment Schedule

In addition to the loan summary, you can print a loan repayment (amortization) schedule for each loan. For each payment period, this schedule contains the year and period within the year (or date, if the START= option is specified), the principal balance at the beginning of the period, the total payment, interest payment, principal repayment for the period, and the principal balance at the end of the period.

To print the first year of the amortization schedule for the fixed rate loan shown in Figure 17.5, use the following statements:

```
proc loan start=1998:12;
  fixed amount=100000 rate=7.5 life=180
    schedule=1
    label='BANK1, Fixed Rate';
run;
```

Figure 17.5 Loan Repayment Schedule for the First Year

The LOAN Procedure					
Loan Repayment Schedule					
BANK1, Fixed Rate					
Date	Beginning Outstanding	Payment	Interest Payment	Principal Repayment	Ending Outstanding
DEC1998	100000.00	0.00	0.00	0.00	100000.00
DEC1998	100000.00	0.00	0.00	0.00	100000.00
JAN1999	100000.00	927.01	625.00	302.01	99697.99
FEB1999	99697.99	927.01	623.11	303.90	99394.09
MAR1999	99394.09	927.01	621.21	305.80	99088.29
APR1999	99088.29	927.01	619.30	307.71	98780.58
MAY1999	98780.58	927.01	617.38	309.63	98470.95
JUN1999	98470.95	927.01	615.44	311.57	98159.38
JUL1999	98159.38	927.01	613.50	313.51	97845.87
AUG1999	97845.87	927.01	611.54	315.47	97530.40
SEP1999	97530.40	927.01	609.57	317.44	97212.96
OCT1999	97212.96	927.01	607.58	319.43	96893.53
NOV1999	96893.53	927.01	605.58	321.43	96572.10
DEC1999	96572.10	927.01	603.58	323.43	96248.67
DEC1999	100000.00	11124.12	7372.79	3751.33	96248.67

The principal balance at the end of one year is \$96,248.67. The total payment for the year is \$11,124.12, of which \$3,751.33 went toward principal repayment.

You can also print the amortization schedule with annual summary information or for a specified number of years. The SCHEDULE=YEARLY option produces an annual summary loan amortization schedule, which is useful for loans with a long life. For example, to print the annual summary loan repayment schedule for the buydown loan shown in [Figure 17.6](#), use the following statements:

```
proc loan start=1998:12;
  buydown amount=100000 rate=6.5 life=180
    buydownrates=(24=8 48=9) pointpct=1
    schedule=yearly
    label='BANK4, Buydown';
run;
```

Figure 17.6 Annual Summary Loan Repayment Schedule

The LOAN Procedure					
Loan Repayment Schedule					
BANK4, Buydown					
Year	Beginning Outstanding	Payment	Interest Payment	Principal Repayment	Ending Outstanding
1998	100000.00	1000.00	0.00	0.00	100000.00
1999	100000.00	10453.32	6380.07	4073.25	95926.75
2000	95926.75	10528.71	6222.21	4306.50	91620.25
2001	91620.25	11358.00	7178.57	4179.43	87440.82
2002	87440.82	11403.51	6901.12	4502.39	82938.43
2003	82938.43	11904.12	7276.64	4627.48	78310.95
2004	78310.95	11904.12	6842.58	5061.54	73249.41
2005	73249.41	11904.12	6367.76	5536.36	67713.05
2006	67713.05	11904.12	5848.43	6055.69	61657.36
2007	61657.36	11904.12	5280.35	6623.77	55033.59
2008	55033.59	11904.12	4659.00	7245.12	47788.47
2009	47788.47	11904.12	3979.34	7924.78	39863.69
2010	39863.69	11904.12	3235.96	8668.16	31195.53
2011	31195.53	11904.12	2422.83	9481.29	21714.24
2012	21714.24	11904.12	1533.41	10370.71	11343.53
2013	11343.53	11904.09	560.56	11343.53	0.00

Loan Comparison

The LOAN procedure can compare alternative loans on the basis of different economic criteria and help select the most desirable loan. You can compare alternative loans through different points in time. The economic criteria offered by PROC LOAN are:

- outstanding principal balance—that is, the unpaid balance of the loan
- present worth of cost—that is, before-tax or after-tax net value of the loan cash flow through the comparison period. The cash flow includes all payments, discount points, initialization costs, down payment, and the outstanding principal balance at the comparison period.
- true interest rate—that is, before-tax or after-tax effective annual interest rate charged on the loan. The cash flow includes all payments, discount points, initialization costs, and the outstanding principal balance at the specified comparison period.
- periodic payment
- the total interest paid on the loan

The figures for present worth of cost, true interest rate, and interest paid are reported on the cash flow through the comparison period. The reported outstanding principal balance and the periodic payment are the values as of the comparison period.

The COMPARE statement specifies the type of comparison and the periods of comparison. For each period specified in the COMPARE statement, a loan comparison report is printed that also indicates the best alternative. Different criteria can lead to selection of different alternatives. Also, the period of comparison might change the desirable alternative. See the section “[Loan Comparison Details](#)” on page 926 for further information.

Comparison of 15-Year versus 30-Year Loan Alternatives

An issue that arises in the purchase of a house is the length of the loan life. Residential home loans are often for 15 or 30 years. Ordinarily, 15-year loans have a lower interest rate but higher periodic payments than 30-year loans. A comparison of both loans might identify the better loan for your means and needs. The following SAS statements compare two such loans:

```
proc loan start=1998:12 amount=120000;
    fixed rate=7.5 life=360 label='30 year loan';
    fixed rate=6.5 life=180 label='15 year loan';
    compare;
run;
```

Default Loan Comparison Report

The default loan comparison report in [Figure 17.7](#) shows the ending outstanding balance, periodic payment, interest paid, and before-tax true rate at the end of 30 years. In the case of the default loan comparison, the selection of the best alternative is based on minimization of the true rate.

Figure 17.7 Default Loan Comparison Report

The LOAN Procedure				
Loan Comparison Report				
Analysis through DEC2028				
Loan Label	Ending Outstanding	Payment	Interest Paid	True Rate
30 year loan	0.00	835.48	182058.02	7.76
15 year loan	0.00	1044.95	68159.02	6.70
NOTE: "15 year loan" is the best alternative based on true rate analysis through DEC2028.				

Based on true rate, the best alternative is the 15-year loan. However, if the objective were to minimize the periodic payment, the 30-year loan would be the more desirable.

Comparison of Fixed Rate and Adjustable Rate Loans

Suppose you want to compare a fixed rate loan to an adjustable rate alternative. The nominal interest rate on the adjustable rate loan is initially 1.5% lower than the fixed rate loan. The future rates of the adjustable rate loan are calculated using the worst case scenario.

The interest paid on a loan might be deductible for tax purposes, depending on the purpose of the loan and applicable laws. In the following example, the TAXRATE=28 (income tax rate) option in the COMPARE statement bases the calculations of true interest rate on the after-tax cash flow. Assume, also, that you are uncertain as to how long you will keep this property. The AT=(60 120) option, as shown in the following example, produces two loan comparison reports through the end of the 5th and the 10th years, respectively:

```
proc loan start=1998:12 amount=120000 life=360;
  fixed rate=7.5 label='BANK1, Fixed Rate';
  arm    rate=6.0 worstcase caps=(0.5 2.5)
        label='BANK3, Adjustable Rate';
  compare taxrate=28 at=(60 120);
run;
```

After-Tax Loan Comparison Reports

The two loan comparison reports in [Figure 17.8](#) and [Figure 17.9](#) show the ending outstanding balance, periodic payment, interest paid, and after-tax true rate at the end of five years and ten years, respectively.

Figure 17.8 Loan Comparison Report as of December 2003

The LOAN Procedure				
Loan Comparison Report				
Analysis through DEC2003				
Loan Label	Ending Outstanding	Payment	Interest Paid	True Rate
BANK1, Fixed Rate	113540.74	839.06	43884.34	5.54
BANK3, Adjustable Rate	112958.49	871.83	40701.93	5.11
NOTE: "BANK3, Adjustable Rate" is the best alternative based on true rate analysis through DEC2003.				

Figure 17.9 Loan Comparison Report as of December 2008

Loan Comparison Report				
Analysis through DEC2008				
Loan Label	Ending Outstanding	Payment	Interest Paid	True Rate
BANK1, Fixed Rate	104153.49	839.06	84840.69	5.54
BANK3, Adjustable Rate	104810.98	909.57	87128.62	5.60
NOTE: "BANK1, Fixed Rate" is the best alternative based on true rate analysis through DEC2008.				

The loan comparison report through December 2003 picks the adjustable rate loan as the best alternative, whereas the report through December 2008 shows the fixed rate loan as the better alternative. This implies that if you intend to keep the loan for 10 years or longer, the best alternative is the fixed rate alternative. Otherwise, the adjustable rate loan is the better alternative in spite of the worst-case scenario. Further analysis shows that the actual breakeven of true interest rate occurs at August 2008. That is, the desirable alternative switches from the adjustable rate loan to the fixed rate loan in August 2008.

Note that, under the assumption of worst-case scenario for the rate adjustments, the periodic payment for the adjustable rate loan already exceeds that of the fixed rate loan on December 2003 (as of the rate adjustment on January 2003 to be exact). If the objective were to minimize the periodic payment, the fixed rate loan would have been more desirable as of December 2003. However, all of the other criteria at that point still favor the adjustable rate loan.

Syntax: LOAN Procedure

The following statements are used with PROC LOAN:

```

PROC LOAN options ;
  FIXED options ;
  BALLOON options ;
  ARM options ;
  BUYDOWN options ;
  COMPARE options ;

```

Functional Summary

Table 17.1 summarizes the statements and options that control the LOAN procedure. Many of the loan specification options can be used on all of the statements except the COMPARE statement. For these options, the statement column is left blank. Options specific to a type of loan indicate the statement name.

Table 17.1 LOAN Functional Summary

Description	Statement	Option
Statements		
specify an adjustable rate loan	ARM	
specify a balloon payment loan	BALLOON	
specify a buydown rate loan	BUYDOWN	
specify loan comparisons	COMPARE	
specify a fixed rate loan	FIXED	
Data Set Options		
specify output data set for loan summary	PROC LOAN	OUTSUM=
specify output data set for repayment schedule		OUT=
specify output data set for loan comparison	COMPARE	OUTCOMP=
Printing Control Options		
suppress printing of loan summary report		NOSUMMARYPRINT
suppress all printed output		NOPRINT
print amortization schedule		SCHEDULE=
suppress printing of loan comparison report	COMPARE	NOCOMPINT
Required Specifications		
specify the loan amount		AMOUNT=
specify life of loan as number of payments		LIFE=
specify the periodic payment		PAYMENT=
specify the initial annual nominal interest rate		RATE=
Loan Specifications Options		
specify loan amount as percentage of price		AMOUNTPCT=
specify time interval between compoundings		COMPOUND=
specify down payment at loan initialization		DOWNPAYMENT=
specify down payment as percentage of price		DOWNPAYPCT=
specify amount paid for loan initialization		INITIAL=
specify initialization costs as a percent		INITIALPCT=
specify time interval between payments		INTERVAL=
specify label for the loan		LABEL=
specify amount paid for discount points		POINTS=
specify discount points as a percent		POINTPCT=
specify uniform or lump sum prepayments		PREPAYMENTS=
specify the purchase price		PRICE=
specify number of decimal places for rounding		ROUND=
specify the date of loan initialization		START=
Balloon Payment Loan Specification Option		
specify the list of balloon payments	BALLOON	BALLOONPAYMENT=

Description	Statement	Option
Rate Adjustment Terms Options		
specify frequency of rate adjustments	ARM	ADJUSTFREQ=
specify periodic and life cap on rate adjustment	ARM	CAPS=
specify maximum rate adjustment	ARM	MAXADJUST=
specify maximum annual nominal interest rate	ARM	MAXRATE=
specify minimum annual nominal interest rate	ARM	MINRATE=
Rate Adjustment Case Options		
specify best-case (optimistic) scenario	ARM	BESTCASE
specify predicted interest rates	ARM	ESTIMATEDCASE=
specify constant rate	ARM	FIXEDCASE
specify worst case (pessimistic) scenario	ARM	WORSTCASE
Buydown Rate Loan Specification Option		
specify list of nominal interest rates	BUYDOWN	BUYDOWNRATES=
Loan Comparison Options		
specify all comparison criteria	COMPARE	ALL
specify the loan comparison periods	COMPARE	AT=
specify breakeven analysis of the interest paid	COMPARE	BREAKINTEREST
specify breakeven analysis of periodic payment	COMPARE	BREAKPAYMENT
specify minimum attractive rate of return	COMPARE	MARR=
specify present worth of cost analysis	COMPARE	PWOF COST
specify the income tax rate	COMPARE	TAXRATE=
specify true interest rate analysis	COMPARE	TRUEINTEREST

PROC LOAN Statement

PROC LOAN *options* ;

The OUTSUM= option can be used in the PROC LOAN statement. In addition, the following loan specification options can be specified in the PROC LOAN statement to be used as defaults for all loans unless otherwise specified for a given loan:

AMOUNT=	INTERVAL=	POINTPCT=
AMOUNTPCT=	LABEL=	PREPAYMENTS=
COMPOUND=	LIFE=	PRICE=
DOWNPAYMENT=	NOSUMMARYPRINT	RATE=
DOWNPAYPCT=	NOPRINT	ROUND=
INITIAL=	PAYMENT=	START=
INITIALPCT=	POINTS=	SCHEDULE=

Output Option

OUTSUM= *SAS-data-set*

creates an output data set that contains loan summary information for all loans other than those for which a different OUTSUM= output data set is specified.

FIXED Statement

FIXED *options* ;

The FIXED statement specifies a fixed rate and periodic payment loan. It can be specified using the options that are common to all loan statements. The FIXED statement options are listed in this section.

You must specify three of the following options in each loan statement: AMOUNT=, LIFE=, RATE=, and PAYMENT=. The LOAN procedure calculates the fourth parameter based on the values you give the other three. If you specify all four of the options, the PAYMENT= specification is ignored, and the periodic payment is recalculated for consistency.

As an alternative to specifying the AMOUNT= option, you can specify the PRICE= option along with one of the following options to facilitate the calculation of the loan amount: AMOUNTPCT=, DOWNPAYMENT=, or DOWNPAYPCT=.

Required Specifications

AMOUNT=*amount*

A=*amount*

specifies the loan amount (the outstanding principal balance at the initialization of the loan).

LIFE=*n*

L=*n*

gives the life of the loan in number of payments. (The payment frequency is specified by the INTERVAL= option.) For example, if the life of the loan is 10 years with monthly payments, use LIFE=120 and INTERVAL=MONTH (default) to indicate a 10-year loan in which 120 monthly payments are made.

PAYMENT=amount**P=amount**

specifies the periodic payment. For ARM and BUYDOWN loans where the periodic payment might change, the PAYMENT= option specifies the initial amount of the periodic payment.

RATE=rate**R=rate**

specifies the initial annual (nominal) interest rate in percent notation. The rate specified must be in the range 0% to 120%. For example, use RATE=12.75 for a 12.75% loan. For ARM and BUYDOWN loans, where the rate might change over the life of the loan, the RATE= option specifies the initial annual interest rate.

Specification Options

AMOUNTPCT=value**APCT=value**

specifies the loan amount as a percentage of the purchase price (PRICE= option). The AMOUNTPCT= specification is used to calculate the loan amount if the AMOUNT= option is not specified. The value specified must be in the range 1% to 100%.

If both the AMOUNTPCT= and DOWNPAYPCT= options are specified and the sum of their values is not equal to 100, the value of the downpayment percentage is set equal to 100 minus the value of the amount percentage.

COMPOUND=time-unit

specifies the time interval between compoundings. The default is the time unit given by the INTERVAL= option. If the INTERVAL= option is not used, then the default is COMPOUND=MONTH. The following time units are valid COMPOUND= values: CONTINUOUS, DAY, SEMIMONTH, MONTH, QUARTER, SEMIYEAR, and YEAR. The compounding interval is used to calculate the simple interest rate per payment period from the nominal annual interest rate or vice versa.

DOWNPAYMENT=amount**DP=amount**

specifies the down payment at the initialization of the loan. The down payment is included in the calculation of the present worth of cost but not in the calculation of the true interest rate. The after-tax analysis assumes that the down payment is not tax-deductible. (Specify after-tax analysis with the TAXRATE= option in the COMPARE statement.)

DOWNPAYPCT=value**DPCT=value**

specifies the down payment as a percentage of the purchase price (PRICE= option). The DOWNPAYPCT= specification is used to calculate the down payment amount if you do not specify the DOWNPAYMENT= option. The value you specify must be in the range 0% to 99%.

If you specified both the AMOUNTPCT= and DOWNPAYPCT= options and the sum of their values is not equal to 100, the value of the downpayment percentage is set equal to 100 minus the value of the amount percentage.

INITIAL=amount

INIT=amount

specifies the amount paid for loan initialization other than the discount points and down payment. This amount is included in the calculation of the present worth of cost and the true interest rate. The after-tax analysis assumes that the initial amount is not tax-deductible. (After-tax analysis is specified by the TAXRATE= option in the COMPARE statement.)

INITIALPCT=value

INITPCT=value

specifies the initialization costs as a percentage of the loan amount (AMOUNT= option). The INITIALPCT= specification is used to calculate the amount paid for loan initialization if you do not specify the INITIAL= option. The value you specify must be in the range of 0% to 100%.

INTERVAL=time-unit

gives the time interval between periodic payments. The default is INTERVAL=MONTH. The following time units are valid INTERVAL values: SEMIMONTH, MONTH, QUARTER, SEMIYEAR, and YEAR.

LABEL='loan-label'

specifies a label for the loan. If you specify the LABEL= option, all output related to the loan is labeled accordingly. If you do not specify the LABEL= option, the loan is labeled by sequence number.

POINTS=amount

PNT=amount

specifies the amount paid for discount points at the initialization of the loan. This amount is included in the calculation of the present worth of cost and true interest rate. The amount paid for discount points is assumed to be tax-deductible in after-tax analysis (that is, if the TAXRATE= option is specified in the COMPARE statement).

POINTPCT=value

PNTPCT=value

specifies the discount points as a percentage of the loan amount (AMOUNT= option). The POINTPCT= specification is used to calculate the amount paid for discount points if you do not specify the POINTS= option. The value you specify must be in the range of 0% to 100%.

PREPAYMENTS=amount

PREPAYMENTS=(date1=prepayment1 date2=prepayment2 ...)

PREPAYMENTS=(period1=prepayment1 period2=prepayment2 ...)

PREP=

specifies either a uniform prepayment p throughout the life of the loan or lump sum prepayments. A uniform prepayment p is assumed to be paid with each periodic payment. Specify lump sum prepayments by pairs of periods (or dates) and respective prepayment amounts.

You can specify the prepayment periods as dates if you specify the START= option. Prepayment periods or dates and the respective prepayment amounts must be in time sequence. The prepayments are treated as principal payments, and the outstanding principal balance is adjusted accordingly. In the adjustable rate and buydown rate loans, if there is a rate adjustment after prepayments, the adjusted

periodic payment is calculated based on the outstanding principal balance. The prepayments do not result in periodic payment amount adjustments in fixed rate and balloon payment loans.

PRICE=*amount*

PRC=*amount*

specifies the purchase price, which is the loan amount plus the down payment. If you specify the PRICE= option along with the loan amount (AMOUNT= option) or the down payment (DOWNPAYMENT= option), the value of the other one is calculated.

If you specify the PRICE= option with the AMOUNTPCT= or DOWNPAYPCT= options, the loan amount and the downpayment are calculated.

ROUND=*n*

ROUND=NONE

specifies the number of decimal places to which the monetary amounts are rounded for the loan. Valid values for *n* are integers from 0 to 6. If you specify ROUND=NONE, the values are not rounded off internally, but the printed output is rounded off to two decimal places. The default is ROUND=2.

START=*SAS-date-literal*

START=*yyyy:period*

S=

gives the date of loan initialization. The first payment is assumed to be one payment interval after the start date. For example, you can specify the START= option as **START='1APR2010'D** or as **START=2010:3**, where 3 is the third payment interval within the year 2010. If INTERVAL=QUARTER, 3 refers to the third quarter. If you specify the START= option, all output for the particular loan is dated accordingly.

Output Options

NOSUMMARYPRINT

NOSUMPR

suppresses the printing of the loan summary report. The NOSUMMARYPRINT option is usually used when an OUTSUM= data set is created to store loan summary information.

NOPRINT

NOP

suppresses all printed output for the loan.

OUT=*SAS-data-set*

writes the loan amortization schedule to an output data set.

OUTSUM=*SAS-data-set*

writes the loan summary for the individual loan to an output data set.

SCHEDULE**SCHEDULE=nyears****SCHEDULE=YEARLY****SCHED**

prints the amortization schedule for the loan. **SCHEDULE=nyears** specifies the number of years the printed amortization table covers. If you omit the number of years or specify a period longer than the loan life, the schedule is printed for the full term of the loan. **SCHEDULE=YEARLY** prints yearly summary information in the amortization schedule rather than the full amortization schedule. **SCHEDULE=YEARLY** is useful for long-term loans.

BALLOON Statement
BALLOON options ;

The **BALLOON** statement specifies a fixed rate loan with scheduled balloon payments in addition to the periodic payment. The following option is used in the **BALLOON** statement, in addition to the required options listed under the **FIXED** statement:

BALLOONPAYMENT=(date1=payment1 date2=payment2 ...)**BALLOONPAYMENT=(period1=payment1 period2=payment2 ...)****BPAY=(date1=payment1 date2=payment2 ...)****BPAY=(period1=payment1 period2=payment2 ...)**

specifies pairs of periods and amounts of balloon (lump sum) payments in excess of the periodic payment during the life of the loan. You can also specify the balloon periods as dates if you specify the **START=** option. The dates are specified as SAS date literals. For example, **BALLOONPAYMENT=('1MAR2011' D=1000)** specifies a payment of 1000 in March of 2011.

If you do not specify this option, the calculations are identical to a loan specified in a **FIXED** statement. Balloon periods (or dates) and the respective balloon payments must be in time sequence.

ARM Statement
ARM options ;

The **ARM** statement specifies an adjustable rate loan where the future interest rates are not known with certainty but will vary within specified limits according to the terms stated in the loan agreement. In practice, the adjustment terms vary. Adjustments in the interest rate can be captured using the **ARM** statement options.

In addition to the required specifications and options listed under the **FIXED** statement, you can use the following options with the **ARM** statement.

Rate Adjustment Terms Options

ADJUSTFREQ=*n*

ADF=*n*

specifies the number of periods, in terms of the INTERVAL= specification, between rate adjustments. INTERVAL=MONTH ADJUSTFREQ=6 indicates that the nominal interest rate can be adjusted every six months until the life cap or maximum rate (whichever is specified) is reached. The default is ADJUSTFREQ=12. The periodic payment is adjusted every adjustment period even if there is no rate change; therefore, if prepayments are made (as specified with the PREPAYMENTS= option), the periodic payment might change even if the nominal rate does not.

CAPS=(*periodic-cap*, *life-cap*)

specifies the maximum interest rate adjustment, in percent notation, allowed by the loan agreement. The *periodic cap* specifies the maximum adjustment allowed at each adjustment period. The *life cap* specifies the maximum total adjustment over the life of the loan. For example, a loan specified with CAPS=(0.5, 2) indicates that the nominal interest rate can change by 0.5% each adjustment period, and the annual nominal interest rate throughout the life of the loan will be within a 2% range of the initial annual nominal rate.

MAXADJUST=*rate*

MAXAD=*rate*

specifies the maximum rate adjustment, in percent notation, allowed at each adjustment period. Use the MAXADJUST= option with the MAXRATE= and MINRATE= options. The initial nominal rate plus the maximum adjustment should not exceed the specified MAXRATE= value. The initial nominal rate minus the maximum adjustment should not be less than the specified MINRATE= value.

MAXRATE=*rate*

MAXR=*rate*

specifies the maximum annual nominal rate, in percent notation, that might be charged on the loan. The maximum annual nominal rate should be greater than or equal to the initial annual nominal rate specified with the RATE= option.

MINRATE=*rate*

MINR=*rate*

specifies the minimum annual nominal rate, in percent notation, that might be charged on the loan. The minimum annual nominal rate should be less than or equal to the initial annual nominal rate specified with the RATE= option.

Rate Adjustment Case Options

PROC LOAN supports four rate adjustment scenarios for analysis of adjustable rate loans: pessimistic (WORSTCASE), optimistic (BESTCASE), no-change (FIXEDCASE), and estimated (ESTIMATEDCASE). The estimated case enables you to analyze the adjustable rate loan with your predictions of future interest rates. The default is worst-case analysis. If more than one case is specified, worst-case analysis is performed. You can specify options for adjustable rate loans as follows:

BESTCASE**B**

specifies a best-case analysis. The best-case analysis assumes that the interest rate charged on the loan will reach its minimum allowed limits at each adjustment period and over the life of the loan. If you use the BESTCASE option, you must specify either the CAPS= option or the MINRATE= and MAXADJUST= options.

ESTIMATEDCASE=(*date1=rate1 date2=rate2 ...*)

ESTIMATEDCASE=(*period1=rate1 period2=rate2 ...*)

ESTC=

specifies an estimated case analysis that indicates the rate adjustments will follow the rates you predict. This option specifies pairs of periods and estimated nominal interest rates.

The ESTIMATEDCASE= option can specify adjustments that cannot fit into the BESTCASE, WORSTCASE, or FIXEDCASE specifications, or “what-if” type analysis. If you specify the START= option, you can also specify the estimation periods as dates, in the form of SAS date literals. Estimated rates and the respective periods must be in time sequence.

If the estimated period falls between two adjustment periods (determined by ADJUSTFREQ= option), the rate is adjusted in the next adjustment period. The nominal interest rate charged on the loan is constant between two adjustment periods.

If any of the MAXRATE=, MINRATE=, CAPS=, and MAXADJUST= options are specified to indicate the rate adjustment terms of the loan agreement, these specifications are used to bound the rate adjustments. By using the ESTIMATEDCASE= option, you are predicting what the annual nominal rates in the market will be at different points in time, not necessarily the interest rate on your particular loan. For example, if the initial nominal rate (RATE= option) is 6.0, ADJUSTFREQ=6, MAXADJUST=0.5, and the ESTIMATEDCASE=(6=6.5, 12=7.5), the actual nominal rates charged on the loan would be 6.0% initially, 6.5% for the sixth through the eleventh periods, and 7.5% for the twelfth period onward.

FIXEDCASE**FIXCASE**

specifies a fixed case analysis that assumes the rate will stay constant. The FIXEDCASE option calculates the ARM loan values similar to a fixed rate loan, but the payments are updated every adjustment period even if the rate does not change, leading to minor differences between the two methods. One such difference is in the way prepayments are handled. In a fixed rate loan, the rate and the payments are never adjusted; therefore, the payment stays the same over the life of the loan even when prepayments are made (instead, the life of the loan is shortened). In an ARM loan with the FIXEDCASE option, on the other hand, if prepayments are made, the payment is adjusted in the following adjustment period, leaving the life of the loan constant.

WORSTCASE**W**

specifies a worst-case analysis. The worst-case analysis assumes that the interest rate charged on the loan will reach its maximum allowed limits at each rate adjustment period and over the life of the loan. If the WORSTCASE option is used, either the CAPS= option or the MAXRATE= and MAXADJUST= options must be specified.

BUYDOWN Statement

BUYDOWN *options ;*

The BUYDOWN statement specifies a buydown rate loan. The buydown rate loans are similar to ARM loans, but the interest rate adjustments are predetermined at the initialization of the loan, usually by paying interest points at the time of loan initialization.

You must use all the required specifications and options listed under the FIXED statement with the BUYDOWN statement. The following option is specific to the BUYDOWN statement and is required:

BUYDOWNRATES=(*date1=rate1 date2=rate2 ...*)

BUYDOWNRATES=(*period1=rate1 period2=rate2 ...*)

BDR=

specifies pairs of periods and the predetermined nominal interest rates that will be charged on the loan starting at the corresponding time periods.

You can also specify the buydown periods as dates in the form of SAS date literals if you also specify the date of the initial payment by using a date value in the START= option. Buydown periods (or dates) and the respective buydown rates must be in time sequence.

COMPARE Statement

COMPARE *options ;*

The COMPARE statement compares multiple loans, or it can be used with a single loan. You can use only one COMPARE statement. COMPARE statement options specify the periods and desired types of analysis for loan comparison. The default analysis reports the outstanding principal balance, breakeven of payment, breakeven of interest paid, and before-tax true interest rate. The default comparison period corresponds to the first LIFE= option specification. If the LIFE= option is not specified for any loan, the loan comparison period defaults to the first calculated life.

You can use the following options with the COMPARE statement. For more detailed information on loan comparison, see the section “[Loan Comparison Details](#)” on page 926.

Analysis Options

ALL

is equivalent to specifying the BREAKINTEREST, BREAKPAYMENT, PWOF COST, and TRUEINTEREST options. The loan comparison report includes all the criteria. You need to specify the MARR= option for present worth of cost calculation.

AT=(*date1 date2 ...*)

AT=(*period1 period2 ...*)

specifies the periods for loan comparison reports. If you specify the START= option in the PROC

LOAN statement, you can specify the AT= option as a list of dates expressed as SAS date literals instead of periods. The comparison periods do not need to be in time sequence. If you do not specify the AT= option, the comparison period defaults to the first LIFE= option specification. If you do not specify the LIFE= option for any of the loans, the loan comparison period defaults to the first calculated life.

BREAKINTEREST

BI

specifies breakeven analysis of the interest paid. The loan comparison report includes the interest paid for each loan through the specified comparison period (AT= option).

BREAKPAYMENT

BP

specifies breakeven analysis of payment. The periodic payment for each loan is reported for every comparison period specified in the AT=option.

MARR=rate

specifies the MARR (minimum attractive rate of return) in percent notation. The MARR reflects the cost of capital or the opportunity cost of money. The MARR= option is used in calculating the present worth of cost.

PWOF COST

PWC

calculates the present worth of cost (net present value of costs) for each loan based on the cash flow through the specified comparison periods. The calculations account for down payment, initialization costs, and discount points, as well as the payments and outstanding principal balance at the comparison period. If you specify the TAXRATE= option, the present worth of cost is based on after-tax cash flow. Otherwise, before-tax present worth of cost is calculated. You need to specify the MARR= option for present worth of cost calculations.

TAXRATE=rate

TAX=rate

specifies income tax rate in percent notation for the after-tax calculations of the true interest rate and present worth of cost for those assets that qualify for tax deduction. If you specify this option, the amount specified in the POINTS= option and the interest paid on the loan are assumed to be tax-deductible. Otherwise, it is assumed that the asset does not qualify for tax deductions, and the cash flow is not adjusted for tax savings.

TRUEINTEREST

TI

calculates the true interest rate (effective interest rate based on the cash flow of all payments, initialization costs, discount points, and the outstanding principal balance at the comparison period) for all the specified loans through each comparison period. If you specify the TAXRATE= option, the true interest rate is based on after-tax cash flow. Otherwise, the before-tax true interest rate is calculated.

Output Options

NOCOMPRINT

NOCF

suppresses the printing of the loan comparison report. The NOCOMPRINT option is usually used when an OUTCOMP= data set is created to store loan comparison information.

OUTCOMP=SAS-data-set

writes the loan comparison report to an output data set.

Details: LOAN Procedure

Computational Details

These terms are used in the formulas that follow:

p	periodic payment
a	principal amount
r_a	nominal annual rate
f	compounding frequency (per year)
f'	payment frequency (per year)
r	periodic rate
r_e	effective interest rate
n	total number of payments

The periodic rate, or the simple interest applied during a payment period, is given by

$$r = \left(1 + \frac{r_a}{f}\right)^{f/f'} - 1$$

Note that the interest calculation is performed at each payment period rather than at the compound period. This is done by adjusting the nominal rate. See Muksian (1984) for details.

Note that when $f = f'$ (that is, when the payment and compounding frequency coincide), the preceding expression reduces to the familiar form:

$$r = \frac{r_a}{f}$$

The periodic rate for continuous compounding can be obtained from this general expression by taking the limit as the compounding frequency f goes to infinity. The resulting expression is

$$r = \exp\left(\frac{r_a}{f}\right) - 1$$

The effective interest rate, or annualized percentage rate (APR), is that rate which, if compounded once per year, is equivalent to the nominal annual rate compounded f times per year. Thus,

$$(1 + r_e) = (1 + r)^f = \left(1 + \frac{r_a}{f}\right)^f$$

or

$$r_e = \left(1 + \frac{r_a}{f}\right)^f - 1$$

For continuous compounding, the effective interest rate is given by

$$r_e = \exp(r_a) - 1$$

See Muksian (1984) for details.

The payment is calculated as

$$p = \frac{ar}{1 - \frac{1}{(1+r)^n}}$$

The amount is calculated as

$$a = \frac{p}{r} \left(1 - \frac{1}{(1+r)^n}\right)$$

Both the payment and amount are rounded to the nearest hundredth (cent) unless the ROUND= specification is different than the default, 2.

The total number of payments n is calculated as

$$n = \frac{-\ln\left(1 - \frac{ar}{p}\right)}{\ln(1 + r)}$$

The total number of payments is rounded up to the nearest integer.

The nominal annual rate is calculated using the bisection method, with a as the objective and r starting in the interval between $8 * 10^{-6}$ and 0.1 with an initial midpoint 0.01 and successive midpoints bisecting.

Loan Comparison Details

In order to compare the costs of different alternatives, the input cash flow for the alternatives must be represented in equivalent values. The equivalent value of a cash flow accounts for the time-value of money. That is, it is preferable to pay the same amount of money later than to pay it now, since the money can earn interest while you keep it. The MARR (minimum attractive rate of return) reflects the cost of capital or the opportunity cost of money—that is, the interest that would have been earned on the savings that is foregone by making the investment. The MARR is used to discount the cash flow of alternatives into equivalent values at a fixed point in time. The MARR can vary for each investor and for each investment. Therefore, the MARR= option must be specified in the COMPARE statement if present worth of cost (PWOF COST option) comparison is specified.

Present worth of cost reflects the equivalent amount at loan initialization of the loan cash flow discounted at MARR, not accounting for inflation. Present worth of cost accounts for the down payment, initialization costs, discount points, periodic payments, and the principal balance at the end of the report period. Therefore, it reflects the present worth of cost of the asset, not the loan. It is meaningful to use minimization of present worth of cost as a selection criterion only if the assets (down payment plus loan amount) are of the same value.

Another economic selection criterion is the rate of return (internal rate of return) of the alternatives. If interest is being earned by an alternative, the objective is to maximize the rate of return. If interest is being paid, as in loan alternatives, the best alternative is the one that minimizes the rate of return. The true interest rate reflects the effective annual rate charged on the loan based on the cash flow, including the initialization cost and the discount points.

The effects of taxes on different alternatives must be accounted for when these vary among different alternatives. Since interest costs on certain loans are tax-deductible, the comparisons for those loans are made based on the after-tax cash flows. The cost of the loan is reduced by the tax benefits it offers through the loan life if the TAXRATE= option is specified. The present worth of cost and true interest rate are calculated based on the after-tax cash flow of the loan. The down payment on the loan and initialization costs are assumed to be not tax-deductible in after-tax analysis. Discount points and the interest paid in each periodic payment are assumed to be tax-deductible if the TAXRATE= option is specified. If the TAXRATE= option is not specified, the present worth of cost and the true interest rate are based on before-tax cash flow, assuming that the interest paid on the specified loan does not qualify for tax benefits.

The other two selection criteria are breakeven analysis of periodic payment and interest paid. If the objective is to minimize the periodic payment, the best alternative is the one with the minimum periodic payment. If the objective is to minimize the interest paid on the principal, then the best alternative is the one with the least interest paid.

Another criterion might be the minimization of the outstanding balance of the loan at a particular point in time. For example, if you plan to sell a house before the end of the loan life (which is often the case), you might want to select the loan with the minimum principal balance at the time of the sale, since this balance must be paid at that time. The outstanding balance of the alternative loans is calculated for each loan comparison period by default.

If you specified the START= option in the PROC LOAN statement, the present worth of cost reflects the equivalent amount for each loan at that point in time. Any loan that has a START= specification different from the one in the PROC LOAN statement is not processed in the loan comparison.

The loan comparison report for each comparison period contains for each loan the loan label, outstanding balance, and any of the following measures if requested in the COMPARE statement: periodic payment (BREAKPAYMENT option), total interest paid to date (BREAKINTEREST option), present worth of cost (PWOF COST option), and true interest rate (TRUEINTEREST option). The best loan is selected on the basis of present worth of cost or true interest rate. If both PWOF COST and TRUEINTEREST options are specified, present worth of cost is the basis for the selection of the best loan.

You can use the OUTCOMP= option in the COMPARE statement to write the loan comparison report to a data set. The NOCOMPRINT option suppresses the printing of a loan comparison report.

OUT= Data Set

The OUT= option writes the loan amortization schedule to an output data set. The OUT= data set contains one observation for each payment period (or one observation for each year if you specified the SCHEDULE=YEARLY option). If you specified the START= option, the DATE variable denotes the date of the payment. Otherwise, YEAR and period variable (SEMIMONTH, MONTH, QUARTER, or SEMIYEAR) denote the payment year and period within the year.

The OUT= data set contains the following variables:

- DATE, date of the payment. DATE is included in the OUT= data set only when you specify the START= option.
- YEAR, year of the payment period. YEAR is included in the OUT= data set only when you do not specify the START= option.
- PERIOD, period within the year of the payment period. The name of the period variable matches the INTERVAL= specification (SEMIMONTH, MONTH, QUARTER, or SEMIYEAR.) The PERIOD variable is included in the OUT= data set only when you do not specify the START= option.
- BEGPRIN, beginning principal balance
- PAYMENT, payment
- INTEREST, interest payment
- PRIN, principal repayment
- ENDPRIN, ending principal balance

OUTCOMP= Data Set

The OUTCOMP= option in the COMPARE statement writes the loan comparison analysis results to an output data set. If you specified the START= option, the DATE variable identifies the date of the loan comparison. Otherwise, the PERIOD variable identifies the comparison period.

The OUTCOMP= data set contains one observation for each loan and for each loan comparison period. The OUTCOMP= data set contains the following variables.

- DATE, date of loan comparison report. The DATE variable is included in the OUTCOMP= data set only when you specify the START= option.
- PERIOD, period of the loan comparison for the observation. The PERIOD variable is included in the OUTCOMP= data set only when you do not specify the START= option.
- LABEL, label string for the loan
- TYPE, type of the loan
- PAYMENT, periodic payment at the time of report. The PAYMENT is included in the OUTCOMP= data set if you specified the BREAKPAYMENT or ALL option or if you used default criteria.
- INTPAY, interest paid through the time of report. The INTPAY variable is included in the OUTCOMP= data set if you specified the BREAKINTEREST or ALL option or if you used default criteria.
- TRUERATE, true interest rate charged on the loan. The TRUERATE variable is included in the OUTCOMP= data set if you specified the TRUERATE or ALL option or if you used default criteria.
- PWOF COST, present worth of cost. The PWOF COST variable is included in the OUTCOMP= data set only if you specified the PWOF COST or ALL option.
- BALANCE, outstanding principal balance at the time of report

OUTSUM= Data Set

The OUTSUM= option writes the loan summary to an output data set. If you specified this option in the PROC LOAN statement, the loan summary information for all loans is written to the specified data set, except for those loans for which you specified a different OUTSUM= data set in the ARM, BALLOON, BUYDOWN, or FIXED statement.

The OUTSUM= data set contains one observation for each loan and contains the following variables:

- TYPE, type of loan
- LABEL, loan label
- PAYMENT, periodic payment
- AMOUNT, loan principal
- DOWNPAY, down payment. DOWNPAY is included in the OUTSUM= data set only when you specify a down payment.
- INITIAL, loan initialization costs. INITIAL is included in the OUTSUM= data set only when you specify initialization costs.

- POINTS, discount points. POINTS is included in the OUTSUM= data set only when you specify discount points.
- TOTAL, total payment
- INTEREST, total interest paid
- RATE, nominal annual interest rate
- EFFRATE, effective interest rate
- INTERVAL, payment interval
- COMPOUND, compounding interval
- LIFE, loan life (that is, the number of payment intervals)
- NCOMPND, number of compounding intervals
- COMPUTE, computed loan parameter: life, amount, payment, or rate

If you specified the START= option either in the PROC LOAN statement or for the individual loan, the OUTSUM= data set also contains the following variables:

- BEGIN, start date
- END, loan termination date

Printed Output

The output from PROC LOAN consists of the loan summary table, loan amortization schedule, and loan comparison report.

Loan Summary Table

The loan summary table shows the total payment and interest, the initial nominal annual and effective interest rates, payment and compounding intervals, the length of the loan in the time units specified, the start and end dates if specified, a list of nominal and effective interest rates, and periodic payments throughout the life of the loan.

A list of balloon payments for balloon payment loans and a list of prepayments if specified are printed with their respective periods or dates.

The loan summary table is printed for each loan by default. The NOSUMMARYPRINT option specified in the PROC LOAN statement suppresses the printing of the loan summary table for all loans. The NOSUMMARYPRINT option can be specified in individual loan statements to selectively suppress the printing of the loan summary table.

Loan Repayment Schedule

The amortization schedule contains for each payment period: the year and period within the year (or date, if you specified the `START=` option); principal balance at the beginning of the period; total payment, interest payment and principal payment for the period; and the principal balance at the end of the period. If you specified the `SCHEDULE=YEARLY` option, the amortization contains a summary for each year instead of for each payment period.

The amortization schedule is not printed by default. The `SCHEDULE` option in the `PROC LOAN` statement requests the printing of amortization tables for all loans. You can specify the `SCHEDULE` option in individual loan statements to selectively request the printing of the amortization schedule.

Loan Comparison Report

The loan comparison report is processed for each report period and contains the results of economic analysis of the loans. The quantities reported can include the outstanding principal balance, after-tax or before-tax present worth of cost and true interest rate, periodic payment, and the interest paid through the report period for each loan. The best alternative is identified if the asset value (down payment plus loan amount) is the same for each alternative.

The loan comparison report is printed by default. The `NOCOMPRINT` option specified in the `COMPARE` statement suppresses the printing of the loan comparison report.

ODS Table Names

`PROC LOAN` assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in Table 17.2.

Table 17.2 ODS Tables Produced in `PROC LOAN`

ODS Table Name	Description	Option
ODS Tables Created by the <code>PROC LOAN</code>, <code>FIXED</code>, <code>ARM</code>, <code>BALLOON</code>, and <code>BUYDOWN</code> Statements		
Repayment	loan repayment schedule	<code>SCHEDULE</code>
ODS Tables Created by the <code>FIXED</code>, <code>ARM</code>, <code>BALLOON</code>, and <code>BUYDOWN</code> Statements		
LoanSummary	loan summary	default
RateList	rates and payments	default
PrepayList	prepayments and periods	<code>PREPAYMENTS=</code>

Table 17.2 (continued)

ODS Table Name	Description	Option
ODS Tables Created by the BALLOON Statement		
BalloonList	balloon payments and periods	default
ODS Tables Created by the COMPARE Statement		
Comparison	loan comparison report	default

Examples: LOAN Procedure

Example 17.1: Discount Points for Lower Interest Rates

This example illustrates the comparison of two \$100,000 loans. The major difference between the two loans is that the nominal interest rate in the second loan is lower than the first with the added expense of paying discount points at the time of initialization.

Both alternatives are 30-year loans. The first loan is labeled “8.25% - no discount points” and the second one is labeled “8% - 1 discount point.”

Assume that the interest paid qualifies for a tax deduction and you are in the 33% tax bracket. Also, your minimum attractive rate of return (MARR) for an alternative investment is 4% (adjusted for tax rate).

You use the following statements to find the breakeven point in the life of the loan for your preference between the loans:

```
proc loan start=1992:1 nosummaryprint amount=100000 life=360;
    fixed rate=8.25 label='8.25% - no discount points';
    fixed rate=8 points=1000 label='8% - 1 discount point';
    compare at=(48 54 60) all taxrate=33 marr=4;
run;
```

Output 17.1.1 shows the loan comparison reports as of January 1996 (48th period), July 1996 (54th period), and January 1997 (60th period).

Output 17.1.1 Loan Comparison Reports for Discount Point Breakeven

The LOAN Procedure				
Loan Comparison Report				
Analysis through JAN1996				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
8.25% - no discount points	96388.09	105546.17	751.27	32449.05
8% - 1 discount point	96219.32	105604.05	733.76	31439.80
Loan Comparison Report				
Analysis through JAN1996				
Loan Label	True Rate			
8.25% - no discount points	5.67			
8% - 1 discount point	5.69			
NOTE: "8.25% - no discount points" is the best alternative based on present worth of cost analysis through JAN1996.				
Loan Comparison Report				
Analysis through JUL1996				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
8.25% - no discount points	95847.27	106164.97	751.27	36415.85
8% - 1 discount point	95656.22	106153.97	733.76	35279.26
Loan Comparison Report				
Analysis through JUL1996				
Loan Label	True Rate			
8.25% - no discount points	5.67			
8% - 1 discount point	5.67			
NOTE: "8% - 1 discount point" is the best alternative based on present worth of cost analysis through JUL1996.				

Output 17.1.1 *continued*

Loan Comparison Report				
Analysis through JAN1997				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
8.25% - no discount points	95283.74	106768.07	751.27	40359.94
8% - 1 discount point	95070.21	106689.80	733.76	39095.81
Loan Comparison Report				
Analysis through JAN1997				
Loan Label	True Rate			
8.25% - no discount points	5.67			
8% - 1 discount point	5.66			
NOTE: "8% - 1 discount point" is the best alternative based on present worth of cost analysis through JAN1997.				

Notice that the breakeven point for present worth of cost and true rate both happen on July 1996. This indicates that if you intend to keep the loan for 4.5 years or more, it is better to pay the discount points for the lower rate. If your objective is to minimize the interest paid or the periodic payment, the “8% - 1 discount point” loan is the preferred choice.

Example 17.2: Refinancing a Loan

Assume that you obtained a fixed rate 15-year loan in June 1995 for \$78,500 with a nominal annual rate of 9%. By early 1998, the market offers a 6.5% interest rate, and you are considering whether to refinance your loan.

Use the following statements to find out the status of the loan on February 1998. [Output 17.2.1](#) shows the results:

```
proc loan start=1995:6;
  fixed life=180 rate=9 amount=78500 noprint
    label='Original Loan';
  compare at=('10FEB1998'd);
run;
```

Output 17.2.1 Loan Comparison Report for Original Loan

The LOAN Procedure				
Loan Comparison Report				
Analysis through FEB1998				
Loan Label	Ending Outstanding	Payment	Interest Paid	True Rate
Original Loan	71028.75	796.20	18007.15	9.38

The monthly payment on the original loan is \$796.20. The ending outstanding principal balance as of February is \$71,028.75. At this point, you might want to refinance your loan with another 15-year loan. The alternate loan has a 6.5% nominal annual rate. The initialization costs are \$1,419.00. Use the following statements to compare your alternatives:

```
proc loan start=1998:2 amount=71028.75;
  fixed rate=9 payment=796.20
    label='Keep the original loan' noprint;
  fixed life=180 rate=6.5 init=1419
    label='Refinance at 6.5%' noprint;
  compare at=(15 16) taxrate=33 marr=4 all;
run;
```

The comparison reports of May 1999 and June 1999 in [Output 17.2.2](#) illustrate the break even between the two alternatives. If you intend to keep the loan through June 1999 or longer, your initialization costs for the refinancing are justified. The periodic payment of the refinanced loan is \$618.74.

Output 17.2.2 Loan Comparison Report for Refinancing Decision

The LOAN Procedure				
Loan Comparison Report				
Analysis through MAY1999				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
Keep the original loan	66862.10	72737.27	796.20	7776.35
Refinance at 6.5%	67382.48	72747.51	618.74	5634.83
Loan Comparison Report				
Analysis through MAY1999				
Loan Label	True Rate			
Keep the original loan	6.20			
Refinance at 6.5%	6.23			
NOTE: "Keep the original loan" is the best alternative based on present worth of cost analysis through MAY1999.				
Loan Comparison Report				
Analysis through JUN1999				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
Keep the original loan	66567.37	72844.52	796.20	8277.82
Refinance at 6.5%	67128.73	72766.42	618.74	5999.82
Loan Comparison Report				
Analysis through JUN1999				
Loan Label	True Rate			
Keep the original loan	6.20			
Refinance at 6.5%	6.12			
NOTE: "Refinance at 6.5%" is the best alternative based on present worth of cost analysis through JUN1999.				

Example 17.3: Prepayments on a Loan

This example compares a 30-year loan with and without prepayments. Assume the \$240,000 30-year loan has an 8.25% nominal annual rate. Use the following statements to see the effect of making uniform prepayments of \$500 with periodic payment:

```
proc loan start=1992:12 rate=8.25 amount=240000 life=360;
  fixed label='No prepayments';
  fixed label='With Prepayments' prepay=500;
  compare at=(120) taxrate=33 marr=4 all;
run;
```

Output 17.3.1 Loan Summary Reports without Prepayments

The LOAN Procedure			
Fixed Rate Loan Summary			
No prepayments			
Downpayment	0.00	Principal Amount	240000.00
Initialization	0.00	Points	0.00
Total Interest	409094.17	Nominal Rate	8.2500%
Total Payment	649094.17	Effective Rate	8.5692%
Pay Interval	MONTHLY	Compounding	MONTHLY
No. of Payments	360	No. of Compoundings	360
Start Date	DEC1992	End Date	DEC2022
Rates and Payments for No prepayments			
Date	Nominal Rate	Effective Rate	Payment
DEC1992	8.2500%	8.5692%	1803.04

Output 17.3.2 Loan Summary Reports with Prepayments

The LOAN Procedure			
Fixed Rate Loan Summary			
With Prepayments			
Downpayment	0.00	Principal Amount	240000.00
Initialization	0.00	Points	0.00
Total Interest	183650.70	Nominal Rate	8.2500%
Total Payment	423650.70	Effective Rate	8.5692%
Pay Interval	MONTHLY	Compounding	MONTHLY
No. of Payments	184	No. of Compoundings	184
Start Date	DEC1992	End Date	APR2008

Output 17.3.2 *continued*

Rates and Payments for With Prepayments			
Date	Nominal Rate	Effective Rate	Payment
DEC1992	8.2500%	8.5692%	2303.04

Output 17.3.3 Loan Comparison Report

The LOAN Procedure				
Loan Comparison Report				
Analysis through DEC2002				
Loan Label	Ending Outstanding	Present Worth of Cost	Payment	Interest Paid
No prepayments	211608.05	268762.31	1803.04	187972.85
With Prepayments	118848.23	264149.25	2303.04	155213.03
Loan Comparison Report				
Analysis through DEC2002				
Loan Label	True Rate			
No prepayments	5.67			
With Prepayments	5.67			
NOTE: "With Prepayments" is the best alternative based on present worth of cost analysis through DEC2002.				

Output 17.3.1 through Output 17.3.3 illustrate the Loan Summary Reports and the Loan Comparison report. Notice that with prepayments you pay off the loan in slightly more than 15 years. Also, the total payments and total interest are considerably lower with the prepayments. If you can afford the prepayments of \$500 each month, another alternative you should consider is using a 15-year loan, which is generally offered at a lower nominal interest rate.

Example 17.4: Output Data Sets

This example shows the analysis and comparison of five alternative loans. Initialization cost, discount points, and both lump sum and periodic payments are included in the specification of these loans. Although no printed output is produced, the loan summary and loan comparison information is stored in the OUTSUM= and OUTCOMP= data sets.

```

proc loan start=1998:12 noprint outsum=loans
  amount=150000 life=360;

  fixed rate=7.5 life=180 prepayment=500
    label='BANK1, Fixed Rate';

  arm rate=5.5 estimatedcase=(12=7.5 18=8)
    label='BANK1, Adjustable Rate';

  buydown rate=7 interval=semimonth init=15000
    bdrates=(3=9 10=10) label='BANK2, Buydown';

  arm rate=5.75 worstcase caps=(0.5 2.5)
    adjustfreq=6 label='BANK3, Adjustable Rate'
    prepayments=(12=2000 36=5000);

  balloon rate=7.5 life=480
    points=1100 balloonpayment=(15=2000 48=2000)
    label='BANK4, with Balloon Payment';

  compare at=(120 360) all marr=7 tax=33 outcomp=comp;
run;

proc print data=loans;
run;

proc print data=comp;
run;

```

Output 17.4.1 and Output 17.4.2 illustrate the contents of the output data sets.

Output 17.4.1 OUTSUM= Data Set

Obs	TYPE	LABEL	PAYMENT	AMOUNT	INITIAL
1	FIXED	BANK1, Fixed Rate	1890.52	150000	0
2	ARM	BANK1, Adjustable Rate	851.68	150000	0
3	BUYDOWN	BANK2, Buydown	673.57	150000	15000
4	ARM	BANK3, Adjustable Rate	875.36	150000	0
5	BALLOON	BANK4, with Balloon Payment	965.36	150000	0

Obs	POINTS	TOTAL	INTEREST	RATE	EFFRATE	INTERVAL
1	0	207839.44	57839.44	0.0750	0.077633	MONTHLY
2	0	390325.49	240325.49	0.0550	0.056408	MONTHLY
3	0	288858.08	138858.08	0.0700	0.072399	SEMIMONTHLY
4	0	387647.82	237647.82	0.0575	0.059040	MONTHLY
5	1100	467372.31	317372.31	0.0750	0.077633	MONTHLY

Obs	COMPOUND	LIFE	NCOMPND	COMPUTE	START	END
1	MONTHLY	110	110	PAYMENT	DEC1998	FEB2008
2	MONTHLY	360	360	PAYMENT	DEC1998	DEC2028
3	SEMIMONTHLY	360	360	PAYMENT	DEC1998	DEC2013
4	MONTHLY	360	360	PAYMENT	DEC1998	DEC2028
5	MONTHLY	480	480	PAYMENT	DEC1998	DEC2038

Output 17.4.2 OUTCOMP= Data Set

Obs	DATE	TYPE	LABEL	PAYMENT
1	DEC2008	FIXED	BANK1, Fixed Rate	1772.76
2	DEC2008	ARM	BANK1, Adjustable Rate	1093.97
3	DEC2008	BUYDOWN	BANK2, Buydown	803.98
4	DEC2008	ARM	BANK3, Adjustable Rate	1065.18
5	DEC2008	BALLOON	BANK4, with Balloon Payment	965.36
6	DEC2028	FIXED	BANK1, Fixed Rate	1772.76
7	DEC2028	ARM	BANK1, Adjustable Rate	1094.01
8	DEC2028	BUYDOWN	BANK2, Buydown	800.46
9	DEC2028	ARM	BANK3, Adjustable Rate	1065.20
10	DEC2028	BALLOON	BANK4, with Balloon Payment	965.36

Obs	INTEREST	TRUERATE	PWOF COST	BALANCE
1	57839.44	0.051424	137741.07	0.00
2	108561.77	0.052212	130397.88	130788.65
3	118182.19	0.087784	161810.00	75798.19
4	107015.58	0.053231	131955.90	125011.88
5	107906.61	0.052107	130242.56	138063.41
6	57839.44	0.051424	137741.07	0.00
7	240325.49	0.053247	121980.94	0.00
8	138858.08	0.086079	161536.44	0.00
9	237647.82	0.054528	124700.22	0.00
10	282855.86	0.051800	117294.50	81326.26

Example 17.5: Piggyback Loans

The *piggyback* loan is becoming a widely available alternative. Borrowers like to avoid the PMI (private mortgage insurance) required with loans where the borrower has a down payment of less than 20% of the price. The piggyback allows a secondary home equity loan to be packaged with a primary loan with less than 20% down payment. The secondary loan usually has a shorter life and higher interest rate. The interest paid on both loans are tax-deductible whereas PMI does not qualify for a tax deduction.

The following example compares a conventional fixed rate loan with 20% down as opposed to a piggyback loan: one primary fixed rate with 10% down payment and a secondary, home equity loan for 10% of the original price. All loans have monthly payments.

The conventional loan alternative is a 30-year loan with a fixed annual rate of 7.5%. The primary loan in the piggyback loan setup is also a 30-year loan with a fixed annual rate of 7.75%. The secondary loan is a 15-year loan with a fixed annual interest rate of 8.25%.

The comparison output for the two loans comprising the piggyback loan is aggregated using the TIME-SERIES procedure with a minimum of specified options:

- The INTERVAL= option requests that the data be aggregated into periods of length 5 years beginning on the 25th month, resulting in appropriately identified periods.
- The ACC=TOTAL option specifies that the output should reflect accumulated totals as opposed to, say, averages.
- The NOTSORTED option indicates that the input data set has not been sorted by the ID variable.

See Chapter 32, “[The TIMESERIES Procedure](#),” for more information about this procedure.

Use the following statements to analyze the conventional loan, as well as the piggyback alternative, and compare them on the basis of their present worth of cost, outstanding balance, and interest payment amounts at the end of 5, 10, and 15 years into the loan life.

```

title1 'LOAN: Piggyback loan example';

title2 'LOAN: Conventional loan';

proc loan start=2002:1 noprint;

    fixed price=200000 dp=40000 rate=7.5 life=360
        label='20 percent down: Conventional Fixed Rate' ;

    compare at=(60 120 180) pwofcost taxrate=30 marr=12
        breakpay breakint outcomp=comploans;

run;

title2 'LOAN: Piggyback: Primary Loan';

proc loan start=2002:1 noprint;
```

```

fixed amount=160000 dp=20000 rate=7.75 life=360
      label='Piggyback: Primary loan' out=loan1;

compare at=(60 120 180 ) pwofcost taxrate=30 marr=12
      breakpay breakint outcomp=cloan1;

run;

title2 'LOAN: Piggyback: Secondary (Home Equity) Loan';

proc loan start=2002:1 noprint;

      fixed amount=20000 rate=8.25 life=180
            label='Piggyback: Secondary (Home Equity) Loan' out=loan2;

      compare at=(60 120 180 ) pwofcost taxrate=30 marr=12
            breakpay breakint outcomp=cloan2;

run;

data cloan12;
      set cloan1 cloan2;
run;

proc timeseries data=cloan12 out= totcomp ;
      id date interval=year5.25 acc=total notsorted;
      var payment interest pwofcost balance ;
run;

/*-- LOAN: Piggyback loan --*/
title;
proc print data=totcomp;
      format date monyy7.;
run;

data comploans;
      set comploans;
      drop type label;
run;

/*-- LOAN: Conventional Loan --*/
title;
proc print data=comploans;
run;

```

The loan comparisons in [Output 17.5.1](#) and [Output 17.5.2](#) illustrate the after-tax comparison of the loans. The after-tax present value of cost for the piggyback loan is lower than the 20% down conventional fixed rate loan.

Output 17.5.1 Piggyback Loan

Obs	DATE	PAYMENT	INTEREST	PWOF COST	BALANCE
1	JAN2007	1340.29	67992.92	157157.41	167575.52
2	JAN2012	1340.29	129973.53	135556.98	149138.73
3	JAN2017	1339.66	183028.58	125285.77	121777.01

Output 17.5.2 Conventional Loan

Obs	DATE	PAYMENT	INTEREST	PWOF COST	BALANCE
1	JAN2007	1118.74	58512.54	160436.81	151388.14
2	JAN2012	1118.74	113121.41	140081.64	138872.61
3	JAN2017	1118.74	162056.97	130014.97	120683.77

References

- DeGarmo, E.P., Sullivan, W.G., and Canada, J.R. (1984), *Engineering Economy*, Seventh Edition, New York: Macmillan Publishing Company.
- Muksian, R. (1984), *Financial Mathematics Handbook*, Englewood Cliffs, NJ: Prentice-Hall.
- Newnan, D.G. (1988), *Engineering Economic Analysis*, Third Edition, San Jose, CA: Engineering Press.
- Riggs, J.L. and West, T.M. (1986), *Essentials of Engineering Economics*, Second Edition, New York: McGraw-Hill.

Chapter 18

The MDC Procedure

Contents

Overview: MDC Procedure	944
Getting Started: MDC Procedure	945
Conditional Logit: Estimation and Prediction	945
Nested Logit Modeling	950
Multivariate Normal Utility Function	954
HEV and Multinomial Probit: Heteroscedastic Utility Function	955
Parameter Heterogeneity: Mixed Logit	960
Syntax: MDC Procedure	962
Functional Summary	962
PROC MDC Statement	964
MDCDATA Statement	964
BOUNDS Statement	965
BY Statement	966
CLASS Statement	966
ID Statement	966
MODEL Statement	966
NEST Statement	972
NLOPTIONS Statement	975
OUTPUT Statement	975
RESTRICT Statement	976
TEST Statement	977
UTILITY Statement	978
Details: MDC Procedure	979
Multinomial Discrete Choice Modeling	979
Multinomial Logit and Conditional Logit	980
Heteroscedastic Extreme-Value Model	982
Mixed Logit Model	983
Multinomial Probit	985
Nested Logit	986
Decision Tree and Nested Logit	988
Model Fit and Goodness-of-Fit Statistics	990
Tests on Parameters	992
OUTEST= Data Set	993
ODS Table Names	994

Examples: MDC Procedure	995
Example 18.1: Binary Data Modeling	995
Example 18.2: Conditional Logit and Data Conversion	998
Example 18.3: Correlated Choice Modeling	1001
Example 18.4: Testing for Homoscedasticity of the Utility Function	1004
Example 18.5: Choice of Time for Work Trips: Nested Logit Analysis	1008
Example 18.6: Hausman's Specification Test	1015
Example 18.7: Likelihood Ratio Test	1018
Acknowledgments: MDC Procedure	1019
References	1019

Overview: MDC Procedure

The MDC (multinomial discrete choice) procedure analyzes models in which the choice set consists of multiple alternatives. This procedure supports conditional logit, mixed logit, heteroscedastic extreme value, nested logit, and multinomial probit models. The MDC procedure uses the maximum likelihood (ML) or simulated maximum likelihood method for model estimation. The term *multinomial logit* is often used in the econometrics literature to refer to the *conditional logit* model of McFadden (1974). Here, the term *conditional logit* refers to McFadden's conditional logit model, and the term *multinomial logit* refers to a model that differs slightly. Schmidt and Strauss (1975) and Theil (1969) are early applications of the multinomial logit model in the econometrics literature. The main difference between McFadden's conditional logit model and the multinomial logit model is that the multinomial logit model makes the choice probabilities depend on the characteristics of the individuals only, whereas the conditional logit model considers the effects of choice attributes on choice probabilities as well.

Unordered multiple choices are observed in many settings in different areas of application. For example, choices of housing location, occupation, political party affiliation, type of automobile, and mode of transportation are all unordered multiple choices. Economics and psychology models often explain observed choices by using the *random utility* function. The utility of a specific choice can be interpreted as the relative pleasure or happiness that the decision maker derives from that choice with respect to other alternatives in a finite choice set. It is assumed that the individual chooses the alternative for which the associated utility is highest. However, the utilities are not known to the analyst with certainty and are therefore treated by the analyst as random variables. When the utility function contains a random component, the individual choice behavior becomes a probabilistic process.

The random utility function of individual i for choice j can be decomposed into deterministic and stochastic components

$$U_{ij} = V_{ij} + \epsilon_{ij}$$

where V_{ij} is a deterministic utility function, assumed to be linear in the explanatory variables, and ϵ_{ij} is an unobserved random variable that captures the factors that affect utility that are not included in V_{ij} . Different assumptions on the distribution of the errors, ϵ_{ij} , give rise to different classes of models.

The features of discrete choice models available in the MDC procedure are summarized in [Table 18.1](#).

Table 18.1 Summary of Models Supported by PROC MDC

Model Type	Utility Function	Distribution of ϵ_{ij}
Conditional logit	$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij}$	IEV, independent and identical
HEV	$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij}$	HEV, independent and nonidentical
Nested logit	$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij}$	GEV, correlated and identical
Mixed logit	$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \xi_{ij} + \epsilon_{ij}$	IEV, independent and identical
Multinomial probit	$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij}$	MVN, correlated and nonidentical

IEV stands for type I extreme-value (or Gumbel) distribution with the probability density function and the cumulative distribution function of the random error given by $f(\epsilon_{ij}) = \exp(-\epsilon_{ij}) \exp(-\exp(-\epsilon_{ij}))$ and $F(\epsilon_{ij}) = \exp(-\exp(-\epsilon_{ij}))$. HEV stands for heteroscedastic extreme-value distribution with the probability density function and the cumulative distribution function of the random error given by $f(\epsilon_{ij}) = \frac{1}{\theta_j} \exp(\frac{\epsilon_{ij}}{\theta_j}) \exp[-\exp(-\frac{\epsilon_{ij}}{\theta_j})]$ and $F(\epsilon_{ij}) = \exp[-\exp(-\frac{\epsilon_{ij}}{\theta_j})]$, where θ_j is a scale parameter for the random component of the j th alternative. GEV stands for generalized extreme-value distribution. MVN represents multivariate normal distribution; and ξ_{ij} is an error component. See the “[Mixed Logit Model](#)” on page 983 section for more information about ξ_{ij} .

Getting Started: MDC Procedure

Conditional Logit: Estimation and Prediction

The MDC procedure is similar in use to the other regression model procedures in the SAS System. However, the MDC procedure requires identification and choice variables. For example, consider a random utility function

$$U_{ij} = x_{1,ij}\beta_1 + x_{2,ij}\beta_2 + \epsilon_{ij} \quad j = 1, \dots, 3$$

where the cumulative distribution function of the stochastic component is a Type I extreme value, $F(\epsilon_{ij}) = \exp(-\exp(-\epsilon_{ij}))$. You can estimate this conditional logit model with the following statements:

```
proc mdc;
  model decision = x1 x2 / type=clogit
    choice=(mode 1 2 3);
  id pid;
run;
```

Note that the MDC procedure, unlike other regression procedures, does not include the intercept term automatically. The dependent variable `decision` takes the value 1 when a specific alternative is chosen; otherwise, it takes the value 0. Each individual is allowed to choose one and only one of the possible alternatives. In other words, the variable `decision` takes the value 1 one time only for each individual. If each individual has three elements (1, 2, and 3) in the choice set, the `NCHOICE=3` option can be specified instead of `CHOICE=(mode 1 2 3)`.

Consider the following trinomial data from Daganzo (1979). The original data (`origdata`) contain travel time (`ttime1`–`ttime3`) and choice (`choice`) variables. The variables `ttime1`–`ttime3` are the travel times for three different modes of transportation, and `choice` indicates which one of the three modes is chosen. The choice variable must have integer values.

```
data origdata;
  input ttime1 ttime2 ttime3 choice @@;
datalines;
16.481 16.196 23.89 2 15.123 11.373 14.182 2
19.469 8.822 20.819 2 18.847 15.649 21.28 2
12.578 10.671 18.335 2 11.513 20.582 27.838 1
... more lines ...
```

A new data set (`newdata`) is created because PROC MDC requires that each individual decision maker has one case for each alternative in his choice set. Note that the `ID` statement is required for all MDC models. In the following example, there are two public transportation modes, 1 and 2, and one private transportation mode, 3, and all individuals share the same choice set.

The first nine observations of the raw data set are shown in [Figure 18.1](#).

Figure 18.1 Initial Choice Data

Obs	ttime1	ttime2	ttime3	choice
1	16.481	16.196	23.890	2
2	15.123	11.373	14.182	2
3	19.469	8.822	20.819	2
4	18.847	15.649	21.280	2
5	12.578	10.671	18.335	2
6	11.513	20.582	27.838	1
7	10.651	15.537	17.418	1
8	8.359	15.675	21.050	1
9	11.679	12.668	23.104	1

The following statements transform the data according to MDC procedure requirements:

```
data newdata(keep=pid decision mode ttime);
  set origdata;
  array tvec{3} ttime1 - ttime3;
  retain pid 0;
  pid + 1;
  do i = 1 to 3;
    mode = i;
```

```

        ttime = tvec{i};
        decision = ( choice = i );
        output;
    end;
run;

```

The first nine observations of the transformed data set are shown in [Figure 18.2](#).

Figure 18.2 Transformed Modal Choice Data

Obs	pid	mode	ttime	decision
1	1	1	16.481	0
2	1	2	16.196	1
3	1	3	23.890	0
4	2	1	15.123	0
5	2	2	11.373	1
6	2	3	14.182	0
7	3	1	19.469	0
8	3	2	8.822	1
9	3	3	20.819	0

The decision variable, `decision`, must have one nonzero value for each decision maker that corresponds to the actual choice. When the `RANK` option is specified, the decision variable must contain rank data. For more details, see the section “[MODEL Statement](#)” on page 966. The following SAS statements estimate the conditional logit model by using maximum likelihood:

```

proc mdc data=newdata;
    model decision = ttime /
        type=clogit
        nchoice=3
        optmethod=qn
        covest=hess;
    id pid;
run;

```

The MDC procedure enables different individuals to have different choice sets. When all individuals have the same choice set, the `NCHOICE=` option can be used instead of the `CHOICE=` option. However, the `NCHOICE=` option is not allowed when a nested logit model is estimated. When the `NCHOICE=number` option is specified, the choices are generated as 1, . . . , *number*. For more flexible alternatives (for example, 1, 3, 6, 8), you need to use the `CHOICE=` option. The choice variable must have integer values.

The `OPTMETHOD=QN` option specifies the quasi-Newton optimization technique. The covariance matrix of the parameter estimates is obtained from the Hessian matrix because `COVEST=HESS` is specified. You can also specify `COVEST=OP` or `COVEST=QML`. See the section “[MODEL Statement](#)” on page 966 for more details.

The MDC procedure produces a summary of model estimation displayed in [Figure 18.3](#). Since there are multiple observations for each individual, the “Number of Cases” (150)—that is, the total number of choices faced by all individuals—is larger than the number of individuals, “Number of Observations” (50).

Figure 18.3 Estimation Summary Table

The MDC Procedure	
Conditional Logit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.32132
Log Likelihood Null (LogL(0))	-54.93061
Maximum Absolute Gradient	2.97024E-6
Number of Iterations	6
Optimization Method	Dual Quasi-Newton
AIC	68.64265
Schwarz Criterion	70.55467

Figure 18.4 shows the frequency distribution of the three choice alternatives. In this example, mode 2 is most frequently chosen.

Figure 18.4 Choice Frequency

Discrete Response Profile				
Index	CHOICE	Frequency	Percent	
0	1	14	28.00	
1	2	29	58.00	
2	3	7	14.00	

The MDC procedure computes nine goodness-of-fit measures for the discrete choice model. Seven of them are pseudo-R-square measures based on the null hypothesis that all coefficients except for an intercept term are zero (Figure 18.5). McFadden's likelihood ratio index (LRI) is the smallest in value. For more details, see the section “Model Fit and Goodness-of-Fit Statistics” on page 990.

Figure 18.5 Likelihood Ratio Test and R-Square Measures

Goodness-of-Fit Measures		
Measure	Value	Formula
Likelihood Ratio (R)	43.219	$2 * (\text{LogL} - \text{LogL0})$
Upper Bound of R (U)	109.86	$-2 * \text{LogL0}$
Aldrich-Nelson	0.4636	$R / (R+N)$
Cragg-Uhler 1	0.5787	$1 - \exp(-R/N)$
Cragg-Uhler 2	0.651	$(1 - \exp(-R/N)) / (1 - \exp(-U/N))$
Estrella	0.6666	$1 - (1 - R/U)^{(U/N)}$
Adjusted Estrella	0.6442	$1 - ((\text{LogL} - K) / \text{LogL0})^{(-2/N * \text{LogL0})}$
McFadden's LRI	0.3934	R / U
Veall-Zimmermann	0.6746	$(R * (U+N)) / (U * (R+N))$
N = # of observations, K = # of regressors		

Finally, the parameter estimate is displayed in [Figure 18.6](#).

Figure 18.6 Parameter Estimate of Conditional Logit

The MDC Procedure					
Conditional Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.3572	0.0776	-4.60	<.0001

The predicted choice probabilities are produced using the OUTPUT statement:

```
output out=probdata pred=p;
```

The parameter estimates can be used to forecast the choice probability of individuals that are not in the input data set. To do so, you need to append to the input data set extra observations whose values of the dependent variable decision are missing, since these extra observations are not supposed to be used in the estimation stage. The identification variable pid must have values that are not used in the existing observations. The output data set, probdata, contains a new variable, p, in addition to input variables in the data set, extdata.

The following statements forecast the choice probability of individuals that are not in the input data set:

```
data extra;
  input pid mode decision ttime;
datalines;
51 1 . 5.0
51 2 . 15.0
51 3 . 14.0
```

```

;

data extdata;
  set newdata extra;
run;

proc mdc data=extdata;
  model decision = ttime /
        type=clogit
        covest=hess
        nchoice=3;
  id pid;
  output out=probdata pred=p;
run;

proc print data=probdata( where=( pid >= 49 ) );
  var mode decision p ttime;
  id pid;
run;

```

The last nine observations from the forecast data set (probdata) are displayed in [Figure 18.7](#). It is expected that the decision maker will choose mode “1” based on predicted probabilities for all modes.

Figure 18.7 Out-of-Sample Mode Choice Forecast

	pid	mode	decision	p	ttime
	49	1	0	0.46393	11.852
	49	2	1	0.41753	12.147
	49	3	0	0.11853	15.672
	50	1	0	0.06936	15.557
	50	2	1	0.92437	8.307
	50	3	0	0.00627	22.286
	51	1	.	0.93611	5.000
	51	2	.	0.02630	15.000
	51	3	.	0.03759	14.000

Nested Logit Modeling

A more general model can be specified using the nested logit model.

Consider, for example, the following random utility function:

$$U_{ij} = x_{ij}\beta + \epsilon_{ij} \quad j = 1, \dots, 3$$

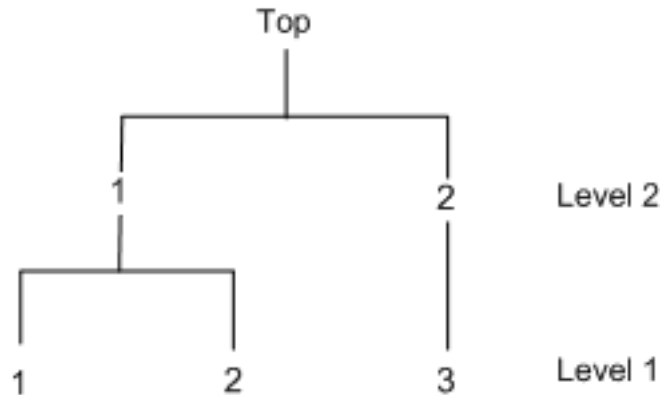
Suppose the set of all alternatives indexed by j is partitioned into K nests, B_1, \dots, B_K . The nested logit model is obtained by assuming that the error term in the utility function has the GEV cumulative distribution function

$$\exp \left(- \sum_{k=1}^K \left(\sum_{j \in B_k} \exp \{ -\epsilon_{ij} / \lambda_k \} \right)^{\lambda_k} \right)$$

where λ_k is a measure of a degree of independence among the alternatives in nest k . When $\lambda_k = 1$ for all k , the model reduces to the standard logit model.

Since the public transportation modes, 1 and 2, tend to be correlated, these two choices can be grouped together. The decision tree displayed in Figure 18.8 is constructed.

Figure 18.8 Decision Tree for Model Choice



The two-level decision tree is specified in the NEST statement. The NCHOICE= option is not allowed for nested logit estimation. Instead, the CHOICE= option needs to be specified, as in the following statements:

```

/*-- nested logit estimation --*/
proc mdc data=newdata;
  model decision = ttime /
    type=nlogit
    choice=(mode 1 2 3)
    covest=hess;

  id pid;
  utility u(1,) = ttime;
  nest level(1) = (1 2 @ 1, 3 @ 2),
    level(2) = (1 2 @ 1);
run;

```

In Figure 18.9, estimates of the inclusive value parameters, INC_L2G1C1 and INC_L2G1C2, are indicative of a nested model structure. See the section “Nested Logit” on page 986 and the section “Decision Tree and Nested Logit” on page 988 for more details about inclusive values.

Figure 18.9 Two-Level Nested Logit Estimates

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime_L1	1	-0.4040	0.1241	-3.25	0.0011
INC_L2G1C1	1	0.8016	0.4352	1.84	0.0655
INC_L2G1C2	1	0.8087	0.3591	2.25	0.0243

The nested logit model is estimated with the restriction $INC_L2G1C1 = INC_L2G1C2$ by specifying the `SAMESCALE` option, as in the following statements:

```

/*-- nlogit with samescale option --*/
proc mdc data=newdata;
  model decision = ttime /
    type=nlogit
    choice=(mode 1 2 3)
    samescale
    covest=hess;
  id pid;
  utility u(1,) = ttime;
  nest level(1) = (1 2 @ 1, 3 @ 2),
    level(2) = (1 2 @ 1);
run;

```

The estimation result is displayed in [Figure 18.10](#).

Figure 18.10 Nested Logit Estimates with One Dissimilarity Parameter

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime_L1	1	-0.4025	0.1217	-3.31	0.0009
INC_L2G1	1	0.8209	0.3019	2.72	0.0066

The nested logit model is equivalent to the conditional logit model if $INC_L2G1C1 = INC_L2G1C2 = 1$. You can verify this relationship by estimating a constrained nested logit model as shown in the following statements. (See the section “[RESTRICT Statement](#)” on page 976 for details about imposing linear restrictions on parameter estimates.)

```

/*-- constrained nested logit estimation --*/
proc mdc data=newdata;
  model decision = ttime /
        type=nlogit
        choice=(mode 1 2 3)
        covest=hess;
  id pid;
  utility u(1,) = ttime;
  nest level(1) = (1 2 @ 1, 3 @ 2),
        level(2) = (1 2 @ 1);
  restrict INC_L2G1C1 = 1, INC_L2G1C2 =1;
run;

```

The parameter estimates and the active linear constraints for the constrained nested logit model are displayed in Figure 18.11.

Figure 18.11 Constrained Nested Logit Estimates

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime_L1	1	-0.3572	0.0776	-4.60	<.0001
INC_L2G1C1	0	1.0000	0		
INC_L2G1C2	0	1.0000	0		
Restrict1	1	-2.1706	8.4098	-0.26	0.7993*
Restrict2	1	3.6573	10.0001	0.37	0.7186*
Parameter Estimates					
Parameter	Parameter Label				
ttime_L1					
INC_L2G1C1					
INC_L2G1C2					
Restrict1	Linear EC [1]				
Restrict2	Linear EC [2]				
* Probability computed using beta distribution.					
Linearly Independent Active Linear Constraints					
1	0	=	-1.0000	+	1.0000 * INC_L2G1C1
2	0	=	-1.0000	+	1.0000 * INC_L2G1C2

Multivariate Normal Utility Function

Consider the random utility function

$$U_{ij} = \text{time}_{ij}\beta + \epsilon_{ij}, \quad j = 1, 2, 3$$

where

$$\begin{bmatrix} \epsilon_{i1} \\ \epsilon_{i2} \\ \epsilon_{i3} \end{bmatrix} \sim N \left(\mathbf{0}, \begin{bmatrix} 1 & \rho_{21} & 0 \\ \rho_{21} & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \right)$$

The correlation coefficient (ρ_{21}) between U_{i1} and U_{i2} represents commonly neglected attributes of public transportation modes, 1 and 2. The following SAS statements estimate this trinomial probit model:

```

/--- homoscedastic mprobit ---/
proc mdc data=newdata;
  model decision = ttime /
    type=mprobit
    nchoice=3
    unitvariance=(1 2 3)
    covest=hess;
  id pid;
run;

```

The UNITVARIANCE=(1 2 3) option specifies that the random component of utility for each of these choices has unit variance. If the UNITVARIANCE= option is specified, it needs to include at least two choices. The results of this constrained multinomial probit model estimation are displayed in [Figure 18.12](#) and [Figure 18.13](#). The test for $\text{ttime} = 0$ is rejected at the 1% significance level.

Figure 18.12 Constrained Probit Estimation Summary

The MDC Procedure	
Multinomial Probit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.88604
Log Likelihood Null (LogL(0))	-54.93061
Maximum Absolute Gradient	0.0002380
Number of Iterations	8
Optimization Method	Dual Quasi-Newton
AIC	71.77209
Schwarz Criterion	75.59613
Number of Simulations	100
Starting Point of Halton Sequence	11

Figure 18.13 Multinomial Probit Estimates with Unit Variances

The MDC Procedure					
Multinomial Probit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.2307	0.0472	-4.89	<.0001
RHO_21	1	0.4820	0.3135	1.54	0.1242

HEV and Multinomial Probit: Heteroscedastic Utility Function

When the stochastic components of utility are heteroscedastic and independent, you can model the data by using an HEV or a multinomial probit model. The HEV model assumes that the utility of alternative j for each individual i has heteroscedastic random components,

$$U_{ij} = V_{ij} + \epsilon_{ij}$$

where the cumulative distribution function of the Gumbel distributed ϵ_{ij} is

$$F(\epsilon_{ij}) = \exp(-\exp(-\epsilon_{ij}/\theta_j))$$

Note that the variance of ϵ_{ij} is $\frac{1}{6}\pi^2\theta_j^2$. Therefore, the error variance is proportional to the square of the scale parameter θ_j . For model identification, at least one of the scale parameters must be normalized to 1. The following SAS statements estimate an HEV model under a unit scale restriction for mode “1” ($\theta_1 = 1$):

```

/*-- hev with gauss-laguerre method --*/
proc mdc data=newdata;
  model decision = ttime /
    type=hev
    nchoice=3
    hev=(unitscale=1, integrate=laguerre)
    covest=hess;
  id pid;
run;

```

The results of computation are presented in Figure 18.14 and Figure 18.15.

Figure 18.14 HEV Estimation Summary

The MDC Procedure	
Heteroscedastic Extreme Value Model Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.41383
Maximum Absolute Gradient	0.0000218
Number of Iterations	11
Optimization Method	Dual Quasi-Newton
AIC	72.82765
Schwarz Criterion	78.56372

Figure 18.15 HEV Parameter Estimates

The MDC Procedure					
Heteroscedastic Extreme Value Model Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.4407	0.1798	-2.45	0.0143
SCALE2	1	0.7765	0.4348	1.79	0.0741
SCALE3	1	0.5753	0.2752	2.09	0.0366

The parameters SCALE2 and SCALE3 in the output correspond to the estimates of the scale parameters θ_2 and θ_3 , respectively.

Note that the estimate of the HEV model is not always stable because computation of the log-likelihood function requires numerical integration. Bhat (1995) proposed the Gauss-Laguerre method. In general, the log-likelihood function value of HEV should be larger than that of conditional logit because HEV models include the conditional logit as a special case. However, in this example the reverse is true (-33.414 for the HEV model, which is less than -33.321 for the conditional logit model). (See Figure 18.14 and Figure 18.3.) This indicates that the Gauss-Laguerre approximation to the true probability is too coarse. You can see how well the Gauss-Laguerre method works by specifying a unit scale restriction for all modes, as in the following statements, since the HEV model with the unit variance for all modes reduces to the conditional logit model:

```

/--- hev with gauss-laguerre and unit scale ---/
proc mdc data=newdata;
  model decision = ttime /
    type=hev

```

```

nchoice=3
hev=(unitscale=1 2 3, integrate=laguerre)
covest=hess;

id pid;
run;

```

Figure 18.16 shows that the time coefficient is not close to that of the conditional logit model.

Figure 18.16 HEV Estimates with All Unit Scale Parameters

The MDC Procedure					
Heteroscedastic Extreme Value Model Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.2926	0.0438	-6.68	<.0001

There is another option of specifying the integration method. The INTEGRATE=HARDY option uses the adaptive Romberg-type integration method. The adaptive integration produces much more accurate probability and log-likelihood function values, but often it is not practical to use this method of analyzing the HEV model because it requires excessive CPU time. The following SAS statements produce the HEV estimates by using the adaptive Romberg-type integration method:

```

/*-- hev with adaptive integration --*/
proc mdc data=newdata;
  model decision = ttime /
    type=hev
    nchoice=3
    hev=(unitscale=1, integrate=hardy)
    covest=hess;

  id pid;
run;

```

The results are displayed in [Figure 18.17](#) and [Figure 18.18](#).

Figure 18.17 HEV Estimation Summary Using Alternative Integration Method

The MDC Procedure	
Heteroscedastic Extreme Value Model Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.02598
Maximum Absolute Gradient	0.0001202
Number of Iterations	8
Optimization Method	Dual Quasi-Newton
AIC	72.05197
Schwarz Criterion	77.78803

Figure 18.18 HEV Estimates Using Alternative Integration Method

The MDC Procedure					
Heteroscedastic Extreme Value Model Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.4580	0.1861	-2.46	0.0139
SCALE2	1	0.7757	0.4283	1.81	0.0701
SCALE3	1	0.6908	0.3384	2.04	0.0412

With the INTEGRATE=HARDY option, the log-likelihood function value of the HEV model, -33.026, is greater than that of the conditional logit model, -33.321. (See [Figure 18.17](#) and [Figure 18.3](#).)

When you impose unit scale restrictions on all choices, as in the following statements, the HEV model gives the same estimates as the conditional logit model. (See [Figure 18.19](#) and [Figure 18.6](#).)

```

/*-- hev with adaptive integration and unit scale --*/
proc mdc data=newdata;
  model decision = ttime /
    type=hev
    nchoice=3
    hev=(unitscale=1 2 3, integrate=hardy)
    covest=hess;
  id pid;
run;

```


Figure 18.19 Alternative HEV Estimates with Unit Scale Restrictions

The MDC Procedure					
Heteroscedastic Extreme Value Model Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.3572	0.0776	-4.60	<.0001

For comparison, the following statements estimate a heteroscedastic multinomial probit model by imposing a zero restriction on the correlation parameter, $\rho_{31} = 0$. The MDC procedure requires normalization of at least two of the error variances in the multinomial probit model. Also, for identification, the correlation parameters associated with a unit normalized variance are restricted to be zero. When the UNITVARIANCE= option is specified, the zero restriction on correlation coefficients applies to the last choice of the list. In the following statements, the variances of the first and second choices are normalized. The UNITVARIANCE=(1 2) option imposes additional restrictions that $\rho_{32} = \rho_{21} = 0$. The default for the UNITVARIANCE= option is the last two choices (which would have been equivalent to UNITVARIANCE=(2 3) for this example). The result is presented in [Figure 18.20](#).

The utility function can be defined as

$$U_{ij} = V_{ij} + \epsilon_{ij}$$

where

$$\epsilon_i \sim N \left(\mathbf{0}, \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & \sigma_3^2 \end{bmatrix} \right)$$

```

/*-- mprobit estimation --*/
proc mdc data=newdata;
  model decision = ttime /
    type=mprobit
    nchoice=3
    unitvariance=(1 2)
    covest=hess;
  id pid;
  restrict RHO_31 = 0;
run;

```

Figure 18.20 Heteroscedastic Multinomial Probit Estimates

The MDC Procedure					
Multinomial Probit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime	1	-0.3206	0.0920	-3.49	0.0005
STD_3	1	1.6913	0.6906	2.45	0.0143
RHO_31	0	0	0		
Restrict1	1	1.1854	1.5490	0.77	0.4499*
Parameter Estimates					
Parameter	Parameter Label				
ttime					
STD_3					
RHO_31					
Restrict1	Linear EC [1]				
* Probability computed using beta distribution.					

Note that in the output the estimates of standard errors and correlations are denoted by STD_i and RHO_ij, respectively. In this particular case the first two variances (STD_1 and STD_2) are normalized to one, and corresponding correlations (RHO_21 and RHO_32) are set to zero, so they are not listed among parameter estimates.

Parameter Heterogeneity: Mixed Logit

One way of modeling unobserved heterogeneity across individuals in their sensitivity to observed exogenous variables is to use the mixed logit model with a random parameters or random coefficients specification. The probability of choosing alternative j is written as

$$P_i(j) = \frac{\exp(\mathbf{x}'_{ij}\boldsymbol{\beta})}{\sum_{k=1}^J \exp(\mathbf{x}'_{ik}\boldsymbol{\beta})}$$

where $\boldsymbol{\beta}$ is a vector of coefficients that varies across individuals and \mathbf{x}_{ij} is a vector of exogenous attributes.

For example, you can specify the distribution of the parameter $\boldsymbol{\beta}$ to be the normal distribution.

The mixed logit model uses a Monte Carlo simulation method to estimate the probabilities of choice. There are two simulation methods available. If the RANDNUM=PSEUDO option is specified in the MODEL statement, pseudo-random numbers are generated; if the RANDNUM=HALTON option is specified, Halton quasi-random sequences are used. The default value is RANDNUM=HALTON.

You can estimate the model with normally distributed random coefficients of time with the following SAS statements:

```

/*-- mixed logit estimation --*/
proc mdc data=newdata type=mixedlogit;
  model decision = ttime /
        nchoice=3
        mixed=(normalparm=ttime);
  id pid;
run;

```

Let β^m and β^s be mean and scale parameters, respectively, for the random coefficient, β . The relevant utility function is

$$U_{ij} = \text{time}_{ij}\beta + \epsilon_{ij}$$

where $\beta = \beta^m + \beta^s\eta$ (β^m and β^s are fixed mean and scale parameters, respectively). The stochastic component, η , is assumed to be standard normal since the NORMALPARM= option is given. Alternatively, the UNIFORMPARM= or LOGNORMALPARM= option can be specified. The LOGNORMALPARM= option is useful when nonnegative parameters are being estimated. The NORMALPARM=, UNIFORMPARM=, and LOGNORMALPARM= variables must be included in the right-hand side of the MODEL statement. See the section “Mixed Logit Model” on page 983 for more details. To estimate a mixed logit model by using the transportation mode choice data, the MDC procedure requires the MIXED= option for random components. Results of the mixed logit estimation are displayed in Figure 18.21.

Figure 18.21 Mixed Logit Model Parameter Estimates

The MDC Procedure					
Mixed Multinomial Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
ttime_M	1	-0.5342	0.2184	-2.45	0.0144
ttime_S	1	0.2843	0.1911	1.49	0.1368

Note that the parameter ttime_M corresponds to the constant mean parameter β^m and the parameter ttime_S corresponds to the constant scale parameter β^s of the random coefficient β .

Syntax: MDC Procedure

The MDC procedure is controlled by the following statements:

```

PROC MDC options ;
  MDCDATA options ;
  BOUNDS bound1 < , bound2 ... > ;
  BY variables ;
  CLASS options ;
  ID variable ;
  MODEL dependent variables = regressors / options ;
  NEST LEVEL(value) = ((values)@(value),..., (values)@(value)) ;
  NLOPTIONS options ;
  OUTPUT options ;
  RESTRICT restriction1 < , restriction2 ... > ;
  TEST options ;
  UTILITY U() = variables, ..., U() = variables ;

```

Functional Summary

Table 18.2 summarizes the statements and options used with the MDC procedure.

Table 18.2 MDC Functional Summary

Description	Statement	Option
Data Set Options		
Formats the data for use by PROC MDC	MDCDATA	
Specifies the input data set	MDC	DATA=
Specifies the output data set for CLASS STATEMENT	CLASS	OUT =
Writes parameter estimates to an output data set	MDC	OUTEST=
Includes covariances in the OUTEST= data set	MDC	COVOUT
Writes linear predictors and predicted probabilities to an output data set	OUTPUT	OUT=
Declaring the Role of Variables		
Specifies the ID variable	ID	
Specifies BY-group processing variables	BY	
Printing Control Options		
Requests all printing options	MODEL	ALL
Displays correlation matrix of the estimates	MODEL	CORRB
Displays covariance matrix of the estimates	MODEL	COVB
Displays detailed information about optimization iterations	MODEL	ITPRINT

Description	Statement	Option
Suppresses all displayed output	MODEL	NOPRINT
Model Estimation Options		
Specifies the choice variables	MODEL	CHOICE=()
Specifies the convergence criterion	MODEL	CONVERGE=
Specifies the type of covariance matrix	MODEL	COVEST=
Specifies the starting point of the Halton sequence	MODEL	HALTONSTART=
Specifies options specific to the HEV model	MODEL	HEV=()
Sets the initial values of parameters used by the iterative optimization algorithm	MODEL	INITIAL=()
Specifies the maximum number of iterations	MODEL	MAXITER=
Specifies the options specific to mixed logit	MODEL	MIXED=()
Specifies the number of choices for each person	MODEL	NCHOICE=
Specifies the number of simulations	MODEL	NSIMUL=
Specifies the optimization technique	MODEL	OPTMETHOD=
Specifies the type of random number generators	MODEL	RANDNUM=
Specifies that initial values are generated using random numbers	MODEL	RANDINIT
Specifies the rank dependent variable	MODEL	RANK
Specifies optimization restart options	MODEL	RESTART=()
Specifies a restriction on inclusive parameters	MODEL	SAMESCALE
Specifies a seed for pseudo-random number generation	MODEL	SEED=
Specifies a stated preference data restriction on inclusive parameters	MODEL	SPSCALE
Specifies the type of the model	MODEL	TYPE=
Specifies normalization restrictions on multinomial probit error variances	MODEL	UNITVARIANCE=()
Controlling the Optimization Process		
Specifies upper and lower bounds for the parameter estimates	BOUNDS	
Specifies linear restrictions on the parameter estimates	RESTRICT	
Specifies nonlinear optimization options	NLOPTIONS	
Nested Logit Related Options		
Specifies the tree structure	NEST	LEVEL()=
Specifies the type of utility function	UTILITY	U()=
Output Control Options		
Outputs predicted probabilities	OUTPUT	P=
outputs estimated linear predictor	OUTPUT	XBETA=
Test Request Options		

Description	Statement	Option
Requests Wald, Lagrange multiplier, and likelihood ratio tests	TEST	ALL
Requests the Wald test	TEST	WALD
Requests the Lagrange multiplier test	TEST	LM
Requests the likelihood ratio test	TEST	LR

PROC MDC Statement

PROC MDC *options* ;

The following options can be used in the PROC MDC statement.

DATA=SAS-data-set

specifies the input SAS data set. If the DATA= option is not specified, PROC MDC uses the most recently created SAS data set.

OUTEST=SAS-data-set

names the SAS data set that the parameter estimates are written to. See “OUTEST= Data Set” later in this chapter for information about the contents of this data set.

COVOUT

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

In addition, any of the following MODEL statement options can be specified in the PROC MDC statement, which is equivalent to specifying the option for the MODEL statement: ALL, CONVERGE=, CORRB, COVB, COVEST=, HALTONSTART=, ITPRINT, MAXITER=, NOPRINT, NSIMUL=, OPTMETHOD=, RANDINIT, RANK, RESTART=, SAMESCALE, SEED=, SPSCALE, TYPE=, and UNITVARIANCE=.

MDCDATA Statement

MDCDATA *options* < / OUT= SAS-data-set > ;

The MDCDATA statement prepares data for use by PROC MDC when the choice-specific information is stored in multiple variables (for example, see [Figure 18.1](#) in the section “Conditional Logit: Estimation and Prediction” on page 945).

VARLIST (*name1* = (*var1 var2 ...*) *name2* = (*var1 var2 ...*) ...)

creates *name* variables from a multiple-variable list of choice alternatives in parentheses. The choice-specific dummy variables are created for the first set of multiple variables. At least one set of multiple variables must be specified. The order of (*var1 var2 ...*) in the VARLIST option determines the numbering of the alternative; that is, *var1* corresponds to alternative 1, *var2* corresponds to alternative 2, and so on.

SELECT=(*variable*)

specifies a variable that contains choices for each individual. The **SELECT=** *variable* needs to be a character-type variable, with values that match variable names in the first VARLIST option: *name1*=(*var1 var2 ...*).

ID=(*name*)

creates a variable that identifies each individual.

ALT=(*name*)

identifies selection alternatives for each individual.

DECVAR=(*name*)

creates a 0/1 variable that indicates the choice made for each individual.

OUT=*SAS-data-set*

specifies a SAS data set to which modified data are output.

BOUNDS Statement

BOUNDS *bound1* < , *bound2* ... > ;

The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the MDC procedure. You can specify any number of BOUNDS statements.

Each *bound* is composed of parameters, constants, and inequality operators:

item operator item < *operator item* < *operator item* ... > > ;

Each *item* is a constant, parameter, or list of parameters. Parameters associated with a regressor variable are referred to by the name of the corresponding regressor variable. Each *operator* is <, >, <=, or >=.

You can use both the BOUNDS statement and the RESTRICT statement to impose boundary constraints; however, the BOUNDS statement provides a simpler syntax for specifying these kinds of constraints. See also the section “[RESTRICT Statement](#)” on page 976.

Lagrange multipliers are reported for all the active boundary constraints. In the displayed output, the Lagrange multiplier estimates are identified with the names Restrict1, Restrict2, and so on. The probability of the Lagrange multipliers is computed using a beta distribution (LaMotte 1994). Nonactive (nonbinding) bounds have no effect on the estimation results and are not noted in the output.

The following BOUNDS statement constrains the estimates of the coefficient of *ttime* to be negative and the coefficients of *x1* through *x10* to be between zero and one. This example illustrates the use of parameter lists to specify boundary constraints.

```
bounds ttime < 0,
      0 < x1-x10 < 1;
```

BY Statement

BY *variables* ;

A BY statement can be used with PROC MDC to obtain separate analyses on observations in groups defined by the BY variables.

CLASS Statement

CLASS *variables* ;

The CLASS statement names the classification variables to be used in the analysis. Classification variables can be either character or numeric.

ID Statement

ID *variable* ;

The ID statement must be used with PROC MDC to specify the identification variable that controls multiple choice-specific cases. The MDC procedure requires only one ID statement even with multiple MODEL statements.

MODEL Statement

MODEL *dependent = regressors < / options >* ;

The MODEL statement specifies the dependent variable and independent regressor variables for the regression model. When the nested logit model is estimated, regressors in the UTILITY statement are used for estimation.

The following options can be used in the MODEL statement after a slash (/).

CHOICE=(*variables*)

CHOICE=(*variable numbers*)

specifies the variables that contain possible choices for each individual. Choice variables must have integer values. Multiple choice variables are allowed only for nested logit models. If all possible alternatives are written with the variable name, the MDC procedure checks all values of the choice variable. The CHOICE=(X 1 2 3) specification implies that the value of X should be 1, 2, or 3. On the other hand, the CHOICE=(X) specification considers all distinctive nonmissing values of X as elements of the choice set.

CONVERGE=*number*

specifies the convergence criterion. The CONVERGE= option is the same as the ABSGCONV= option in the NLOPTIONS statement. The ABSGCONV= option in the NLOPTIONS statement overrides the CONVERGE= option. The default value is 1E-5.

HALTONSTART=*number*

specifies the starting point of the Halton sequence. The specified number must be a positive integer. The default is HALTONSTART=11.

HEV=(*option-list*)

specifies options that are used to estimate the HEV model. The HEV model with a unit scale for the alternative 1 is estimated using the following SAS statement:

```
model y = x1 x2 x3 / hev=(unitscale=1);
```

The following options can be used in the HEV= option. These options are listed within parentheses and separated by commas.

INTORDER=*number*

specifies the number of summation terms for Gaussian quadrature integration. The default is INTORDER=40. The maximum order is limited to 45. This option applies only to the INTEGRATION=LAGUERRE method.

UNITSCALE=*number-list*

specifies restrictions on scale parameters of stochastic utility components.

INTEGRATE=LAGUERRE | HARDY

specifies the integration method. The INTEGRATE=HARDY option specifies an adaptive integration method, while the INTEGRATE=LAGUERRE option specifies the Gauss-Laguerre approximation method. The default is INTEGRATE=LAGUERRE.

MIXED=(*option-list*)

specifies options that are used for mixed logit estimation. The mixed logit model with normally distributed random parameters is specified as follows:

```
model y = x1 x2 x3 / mixed=(normalparm=x1);
```

The following options can be used in the MIXED= option. The options are listed within parentheses and separated by commas.

LOGNORMALPARM=*variables*

specifies the variables whose random coefficients are lognormally distributed. LOGNORMALPARM= *variables* must be included on the right-hand side of the MODEL statement.

NORMALEC=*variables*

specifies the error component variables whose coefficients have a normal distribution $N(0, \sigma^2)$.

NORMALPARM=*variables*

specifies the variables whose random coefficients are normally distributed. NORMALPARM= *variables* must be included on the right-hand side of the MODEL statement.

UNIFORMEC=variables

specifies the error component variables whose coefficients have a uniform distribution $U(-\sqrt{3}\sigma, \sqrt{3}\sigma)$.

UNIFORMPARM=variables

specifies the variables whose random coefficients are uniformly distributed. **UNIFORMPARM= variables** must be included on the right-hand side of the **MODEL** statement.

NCHOICE=number

specifies the number of choices for multinomial choice models when all individuals have the same choice set. When individuals have different number of choices, the **NCHOICE=** option is not allowed, and the **CHOICE=** option should be used. The **NCHOICE=** and **CHOICE=** options must not be used simultaneously, and the **NCHOICE=** option cannot be used for nested logit models.

NSIMUL=number

specifies the number of simulations when the mixed logit or multinomial probit model is estimated. The default is **NSIMUL=100**. In general, you need a smaller number of simulations with **RANDNUM=HALTON** than with **RANDNUM=PSEUDO**.

RANDNUM=value

specifies the type of the random number generator used for simulation. **RANDNUM=HALTON** is the default. The following option values are allowed:

PSEUDO	specifies pseudo-random number generation.
HALTON	specifies Halton sequence generation.

RANDINIT**RANDINIT=number**

specifies that initial parameter values be perturbed by uniform pseudo-random numbers for numerical optimization of the objective function. The default is $U(-1, 1)$. When the **RANDINIT=r** option is specified, $U(-r, r)$ pseudo-random numbers are generated. The value r should be positive. With a **RANDINIT** or **RANDINIT=** option, there are pure random searches for a given number of trials (1,000 for conditional or nested logit, and 500 for other models) to get a maximum (or minimum) value of the objective function. For example, when there is a parameter estimate with an initial value of 1, the **RANDINIT** option adds a generated random number u to the initial value and computes an objective function value by using $1 + u$. This option is helpful in finding the initial value automatically if there is no guidance in setting the initial estimate.

RANK

specifies that the dependent variable contain ranks. The numbers must be positive integers starting from 1. When the dependent variable has value 1, the corresponding alternative is chosen. This option is provided only as a convenience to the user; the extra information contained in the ranks is not currently used for estimation purposes.

RESTART=(option-list)

specifies options that are used for reiteration of the optimization problem. When the **ADDRANDOM** option is specified, the initial value of reiteration is computed using random grid searches around the initial solution, as follows:

```

model y = x1 x2 / type=clogit
      restart=(addvalue=(.01 .01));

```

The preceding SAS statement reestimates a conditional logit model by adding ADDVALUE= values. If the ADDVALUE= option contains missing values, the RESTART= option uses the corresponding estimate from the initial stage. If no ADDVALUE= value is specified for an estimate, a default value equal to $(\text{lestatel} * 1e-3)$ is added to the corresponding estimate from the initial stage. If both the ADDVALUE= and ADDRANDOM(=) options are specified, ADDVALUE= is ignored.

The following options can be used in the RESTART= option. The options are listed within parentheses.

ADDMAXIT=*number*

specifies the maximum number of iterations for the second stage of the estimation. The default is ADDMAXIT=100.

ADDRANDOM

ADDRANDOM=*value*

specifies random added values to the estimates from the initial stage. With the ADDRANDOM option, $U(-1, 1)$ random numbers are created and added to the estimates obtained in the initial stage. When the ADDRANDOM=*r* option is specified, $U(-r, r)$ random numbers are generated. The restart initial value is determined based on the given number of random searches (1,000 for conditional or nested logit, and 500 for other models).

ADDVALUE=(*value-list*)

specifies values added to the estimates from the initial stage. A missing value in the list is considered as a zero value for the corresponding estimate. When the ADDVALUE= option is not specified, default values equal to $(\text{lestatel} * 1e-3)$ are added.

SAMESCALE

specifies that the parameters of the inclusive values be the same within a group at each level when the nested logit is estimated.

SEED=*number*

specifies an initial seed for pseudo-random number generation. The SEED= value must be less than $2^{31} - 1$. If the SEED= value is negative or zero, the time of day from the computer's clock is used to obtain the initial seed. The default is SEED=0.

SPSCALE

specifies that the parameters of the inclusive values be the same for any choice with only one nested choice within a group, for each level in a nested logit model. This option is useful in analyzing stated preference data.

TYPE=*value*

specifies the type of model to be analyzed. The following model types are supported:

CONDITIONLOGIT | CLOGIT | CL specifies a conditional logit model.

HEV	specifies a heteroscedastic extreme-value model.
MIXEDLOGIT MXL	specifies a mixed logit model.
MULTINOMPROBIT MPROBIT MP	specifies a multinomial probit model.
NESTEDLOGIT NLOGIT NL	specifies a nested logit model.

UNITVARIANCE=(*number-list*)

specifies normalization restrictions on error variances of multinomial probit for the choices whose numbers are given in the list. If the UNITVARIANCE= option is specified, it must include at least two choices. Also, for identification, additional zero restrictions are placed on the correlation coefficients for the last choice in the list.

COVEST=*value*

specifies the type of covariance matrix. The following types are supported:

OP	specifies the covariance from the outer product matrix.
HESSIAN	specifies the covariance from the Hessian matrix.
QML	specifies the covariance from the outer product and Hessian matrices.

When COVEST=OP is specified, the outer product matrix is used to compute the covariance matrix of the parameter estimates. The COVEST=HESSIAN option produces the covariance matrix by using the inverse Hessian matrix. The quasi-maximum likelihood estimates are computed with COVEST=QML. The default is COVEST=HESSIAN when the Newton-Raphson method is used. COVEST=OP is the default when the OPTMETHOD=QN option is specified.

Printing Options

ALL

requests all printing options.

COVB

displays the estimated covariances of the parameter estimates.

CORRB

displays the estimated correlation matrix of the parameter estimates.

ITPRINT

displays the initial parameter estimates, convergence criteria, and constraints of the optimization. At each iteration, the objective function value, the maximum absolute gradient element, the step size, and the slope of search direction are printed. The objective function is the full negative log-likelihood function for the maximum likelihood method. When the ITPRINT option is specified and the NLOPTIONS statement is specified, all printing options in the NLOPTIONS statement are ignored.

NOPRINT

suppresses all displayed output.

Estimation Control Options

You can also specify detailed optimization options in the NLOPTIONS statement. The OPTMETHOD= option overrides the TECHNIQUE= option in the NLOPTIONS statement. The NLOPTIONS statement is ignored if the OPTMETHOD= option is specified.

INITIAL=(*initial-values*)

START=(*initial-values*)

specifies initial values for some or all of the parameter estimates. The values specified are assigned to model parameters in the same order in which the parameter estimates are displayed in the MDC procedure output.

When you use the INITIAL= option, the initial values in the INITIAL= option must satisfy the restrictions specified for the parameter estimates. If they do not, the initial values you specify are adjusted to satisfy the restrictions.

MAXITER=*number*

sets the maximum number of iterations allowed. The MAXITER= option overrides the MAXITER= option in the NLOPTIONS statement. The default is MAXITER=100.

OPTMETHOD=*value*

specifies the optimization technique when the estimation method uses nonlinear optimization. The following techniques are supported:

QN	specifies the quasi-Newton method.
NR	specifies the Newton-Raphson method.
TR	specifies the trust region method.

The OPTMETHOD=NR option is the same as the TECHNIQUE=NEWRAP option in the NLOPTIONS statement. For the conditional and nested logit models, the default is OPTMETHOD=NR. For other models, the default is OPTMETHOD=QN.

NEST Statement

NEST LEVEL (*level-number*) = (*choices@choice, ...*);

The NEST statement is used when one choice variable contains all possible alternatives and the TYPE=NLOGIT option is specified. The decision tree is constructed based on the NEST statement. When the choice set is specified using multiple CHOICE= variables in the MODEL statement, the NEST statement is ignored.

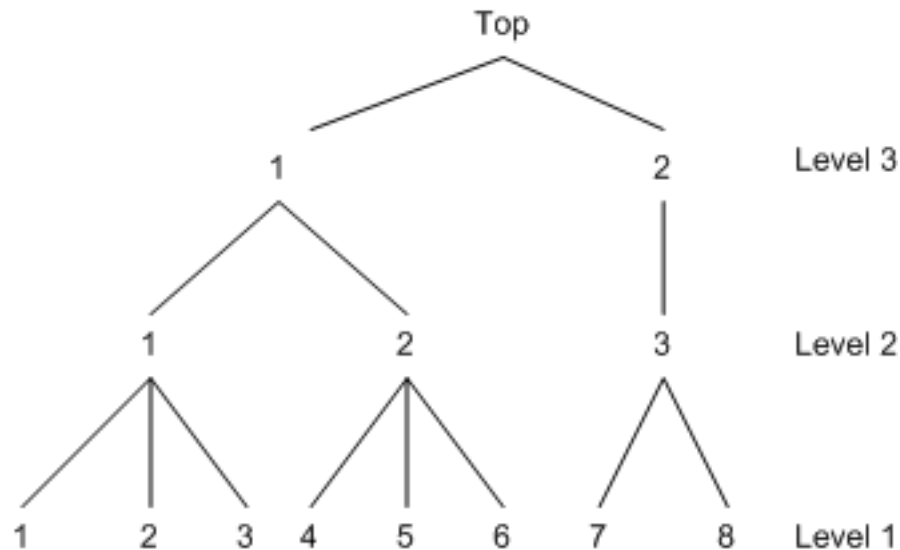
Consider the following eight choices that are nested in a three-level tree structure.

Level 1	Level 2	Level 3	top
1	1	1	1
2	1	1	1
3	1	1	1
4	2	1	1
5	2	1	1
6	2	1	1
7	3	2	1
8	3	2	1

You can use the following NEST statement to specify the tree structure displayed in Figure 18.22:

```
nest level(1) = (1 2 3 @ 1, 4 5 6 @ 2, 7 8 @ 3),
      level(2) = (1 2 @ 1, 3 @ 2),
      level(3) = (1 2 @ 1);
```

Figure 18.22 A Three-Level Tree

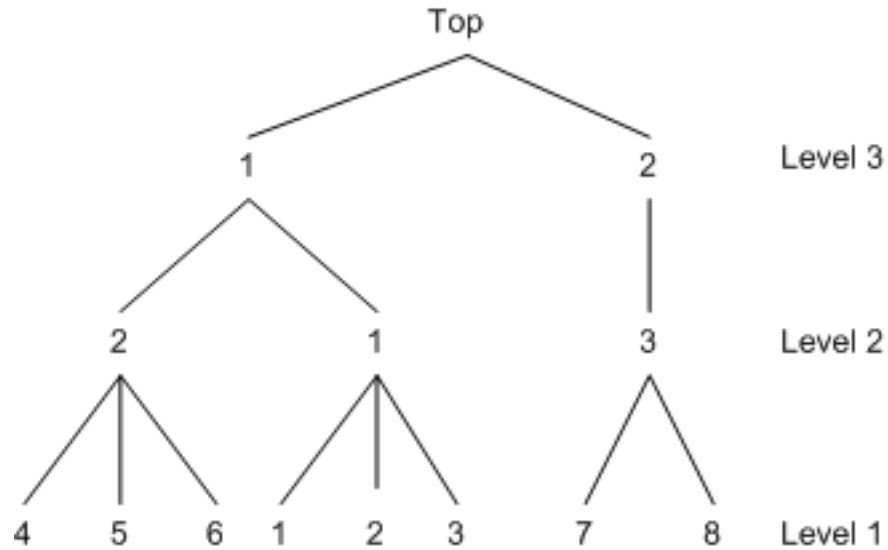


Note that the decision tree is constructed based on the sequence of first-level choice set specification. There-

fore, specifying another order at Level 1 builds a different tree. The following NEST statement builds the tree displayed in [Figure 18.23](#):

```
nest level(1) = (4 5 6 @ 2, 1 2 3 @ 1, 7 8 @ 3),
  level(2) = (1 2 @ 1, 3 @ 2),
  level(3) = (1 2 @ 1);
```

Figure 18.23 An Alternative Three-Level Tree



However, the NEST statement with a different sequence of choice specification at higher levels builds the same tree as displayed in [Figure 18.22](#) if the sequence at the first level is the same:

```
nest level(1) = (1 2 3 @ 1, 4 5 6 @ 2, 7 8 @ 3),
  level(2) = (3 @ 2, 1 2 @ 1),
  level(3) = (1 2 @ 1);
```

The following specifications are equivalent:

```
nest level(2) = (3 @ 2, 1 2 @ 1)
```

```
nest level(2) = (3 @ 2, 1 @ 1, 2 @ 1)
```

```
nest level(2) = (1 @ 1, 2 @ 1, 3 @ 2)
```

Since the MDC procedure contains multiple cases for each individual, it is important to keep the data sequence in the proper order. Consider the four-choice multinomial model with one explanatory variable cost:

pid	choice	y	cost
1	1	1	10
1	2	0	25
1	3	0	20
1	4	0	30
2	1	0	15
2	2	0	22
2	3	1	16
2	4	0	25

The order of data needs to correspond to the value of choice. Therefore, the following data set is equivalent to the preceding data:

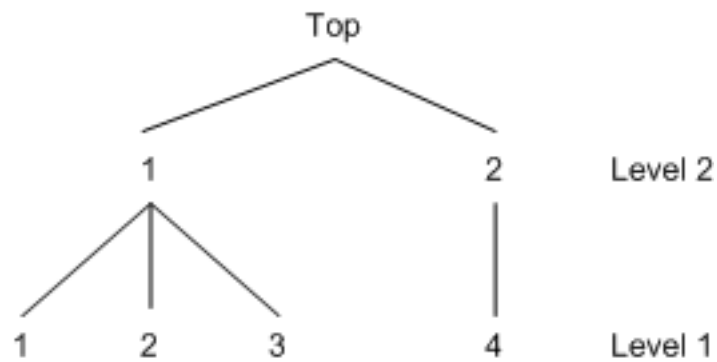
pid	choice	y	cost
1	2	0	25
1	3	0	20
1	1	1	10
1	4	0	30
2	3	1	16
2	4	0	25
2	1	0	15
2	2	0	22

The two-level nested model is estimated with a NEST statement, as follows:

```
proc mdc data=one type=nlogit;
  model y = cost / choice=(choice);
  id pid;
  utility(1,) = cost;
  nest level(1) = (1 2 3 @ 1, 4 @ 2),
    level(2) = (1 2 @ 1);
run;
```

The tree is constructed as in [Figure 18.24](#).

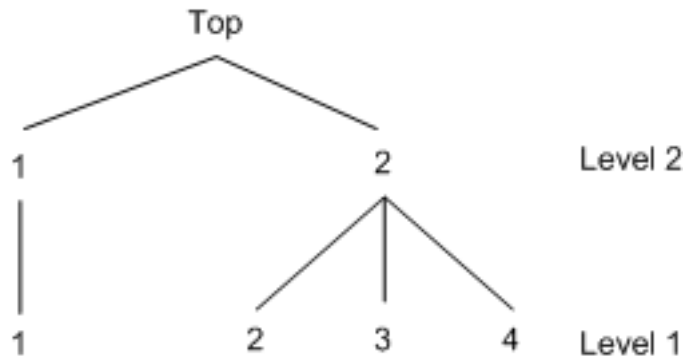
Figure 18.24 A Two-Level Tree



Another model is estimated if you specify the decision tree as in Figure 18.25. The different nested tree structure is specified in the following SAS statements:

```
proc mdc data=one type=nlogit;
  model y = cost / choice=(choice);
  id pid;
  utility u(1,) = cost;
  nest level(1) = (1 @ 1, 2 3 4 @ 2),
    level(2) = (1 2 @ 1);
run;
```

Figure 18.25 An Alternate Two-Level Tree



NLOPTIONS Statement

NLOPTIONS *options* ;

PROC MDC uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. The NLOPTIONS statement specifies nonlinear optimization options. The NLOPTIONS statement must follow the MODEL statement. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “Nonlinear Optimization Methods.”

OUTPUT Statement

OUTPUT *options* ;

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimated linear predictors (XBETA) and predicted probabilities (P). The input data set must be sorted by the choice variables within each ID.

OUT=*SAS-data-set*

specifies the name of the output data set.

PRED=*variable name*

P=*variable name*

requests the predicted probabilities by naming the variable that contains the predicted probabilities in the output data set.

XBETA=*variable name*

names the variable that contains the linear predictor ($\mathbf{x}'\boldsymbol{\beta}$) values. However, the XBETA= option is not supported in the nested logit model.

RESTRICT Statement

RESTRICT *restriction1* < , *restriction2* . . . > ;

The RESTRICT statement imposes linear restrictions on the parameter estimates. You can specify any number of RESTRICT statements.

Each *restriction* is written as an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

expression operator expression ;

The *operator* can be =, <, >, <=, or >=.

Restriction expressions can be composed of parameters; multiplication (*), summation (+), and subtraction (−) operators; and constants. Parameters named in restriction expressions must be among the parameters estimated by the model. Parameters associated with a regressor variable are referred to by the name of the corresponding regressor variable. The restriction expressions must be a linear function of the parameters.

Lagrange multipliers are reported for all the active linear constraints. In the displayed output, the Lagrange multiplier estimates are identified with the names Restrict1, Restrict2, and so on. The probability of the Lagrange multipliers is computed using a beta distribution (LaMotte 1994).

The following are examples of using the RESTRICT statement:

```
proc mdc data=one;
model y = x1-x10 /
      type=clogit
      choice=(mode 1 2 3);
id pid;
restrict x1*2 <= x2 + x3, ;
run;

proc mdc data=newdata;
model decision = ttime /
      type=mprobit
      nchoice=3
      unitvariance=(1 2)
      covest=hess;
id pid;
restrict RHO_31 = 0, STD_3<=1;
run;
```

TEST Statement

`<'label':> TEST <'string':> equation <,equation...> </options> ;`

The TEST statement performs Wald, Lagrange multiplier, and likelihood ratio tests of linear hypotheses about the regression parameters in the preceding MODEL statement. Each equation specifies a linear hypothesis to be tested. All hypotheses in one TEST statement are tested jointly. Variable names in the equations must correspond to regressors in the preceding MODEL statement, and each name represents the coefficient of the corresponding regressor. The keyword INTERCEPT refers to the coefficient of the intercept.

The following options can be specified after the slash (/):

ALL

requests Wald, Lagrange multiplier, and likelihood ratio tests.

WALD

requests the Wald test.

LM

requests the Lagrange multiplier test.

LR

requests the likelihood ratio test.

The following statements illustrate the use of the TEST statement:

```
proc mdc;
  model decision = x1 x2 / type=clogit
    choice=(mode 1 2 3);
  id pid;
  test x1 = 0, 0.5 * x1 + 2 * x2 = 0;
run;
```

The test investigates the joint hypothesis that

$$\beta_1 = 0$$

and

$$0.5\beta_1 + 2\beta_2 = 0$$

Only linear equality restrictions and tests are permitted in PROC MDC. Tests expressions can be composed only of algebraic operations that use the addition symbol (+), subtraction symbol (–), and multiplication symbol (*).

The TEST statement accepts labels that are reproduced in the printed output. The TEST statement can be labeled in two ways. A TEST statement can be preceded by a label followed by a colon. Alternatively, the keyword TEST can be followed by a quoted string followed by a colon. If both are present, PROC MDC uses the label that precedes the first colon. If no label is present, PROC MDC automatically labels the tests.

UTILITY Statement

UTILITY U (*level* < , *choices* >)= *variables* ;

The **UTILITY** statement specifies a utility function that can be used in estimating a nested logit model. The **U()**= option can have two arguments. The first argument contains level information, and the second argument is related to choice information. The second argument can be omitted for the first level when all the choices at the first level share the same variables and the same parameters. However, for any level above the first, the second argument must be provided. The **UTILITY** statement specifies a utility function while the **NEST** statement constructs the decision tree.

Consider a two-level nested logit model that has one explanatory variable at level 1. This model can be specified as follows:

```
proc mdc data=one type=nlogit;
  model y = cost / choice=(choice);
  id pid;
  utility u(1,2 3 4) = cost;
  nest level(1) = (1 @ 1, 2 3 4 @ 2),
    level(2) = (1 2 @ 1);
run;
```

You also can specify the following statement because all the variables at the first level share the same explanatory variable, *cost*:

```
utility u(1,) = cost;
```

The variable, *cost*, must be listed in the **MODEL** statement. When the additional explanatory variable, *dummy*, is included at level 2, another **U()**= option needs to be specified. Note that the **U()**= option must specify choices within any level above the first. Thus, it is specified as **U(2, 1 2)** in the following statements:

```
proc mdc data=one type=nlogit;
  model y = cost dummy / choice=(choice);
  id pid;
  utility u(1,) = cost,
    u(2,1 2) = dummy;
  nest level(1) = (1 @ 1, 2 3 4 @ 2),
    level(2) = (1 2 @ 1);
run;
```

Details: MDC Procedure

Multinomial Discrete Choice Modeling

When the dependent variable takes multiple discrete values, you can use multinomial discrete choice modeling to analyze the data. This section considers models for unordered multinomial data.

Let the random utility function be defined by

$$U_{ij} = V_{ij} + \epsilon_{ij}$$

where the subscript i is an index for the individual, the subscript j is an index for the alternative, V_{ij} is a nonstochastic utility function, and ϵ_{ij} is a random component (error) that captures unobserved characteristics of alternatives or individuals or both. In multinomial discrete choice models, the utility function is assumed to be linear, so that $V_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta}$.

In the conditional logit model, each ϵ_{ij} for all $j \in C_i$ is distributed independently and identically (iid) with the Type I extreme-value distribution, $\exp(-\exp(-\epsilon_{ij}))$, also known as the Gumbel distribution.

The iid assumption on the random components of the utilities of the different alternatives can be relaxed to overcome the well-known and restrictive *independence from irrelevant alternatives* (IIA) property of the conditional logit model. This allows for more flexible substitution patterns among alternatives than the one imposed by the conditional logit model. See the section “[Independence from Irrelevant Alternatives \(IIA\)](#)” on page 981.

The nested logit model is derived by allowing the random components to be identical but nonindependent. Instead of independent Type I extreme-value errors, the errors are assumed to have a generalized extreme-value distribution. This model generalizes the conditional logit model to allow for particular patterns of correlation in unobserved utility (McFadden 1978).

Another generalization of the conditional logit model, the heteroscedastic extreme-value (HEV) model, is obtained by allowing independent but nonidentical errors distributed with a Type I extreme-value distribution (Bhat 1995). It permits different variances on the random components of utility across the alternatives.

Mixed logit models are also generalizations of the conditional logit model that can represent very general patterns of substitution among alternatives. See the “[Mixed Logit Model](#)” on page 983 section for details.

The multinomial probit (MNP) model is derived when the errors, $(\epsilon_{i1}, \epsilon_{i2}, \dots, \epsilon_{iJ})$, have a multivariate normal (MVN) distribution. Thus, this model accommodates a very general error structure.

The multinomial probit model requires burdensome computation compared to a family of multinomial choice models derived from the Gumbel distributed utility function, since it involves multi-dimensional integration (with dimension $J - 1$) in the estimation process. In addition, the multinomial probit model requires more parameters than other multinomial choice models. As a result, conditional and nested logit models are used more frequently, even though they are derived from a utility function whose random component is more restrictively defined than the multinomial probit model.

The event of a choice being made, $\{y_i = j\}$, can be expressed using a random utility function

$$U_{ij} \geq \max_{k \in C_i, k \neq j} U_{ik}$$

where C_i is the choice set of individual i . Individual i chooses alternative j if and only if it provides a level of utility that is greater than or equal to that of any other alternative in his choice set. Then, the probability that individual i chooses alternative j (from among the n_i choices in his choice set C_i) is

$$P_i(j) = P_{ij} = P[\mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij} \geq \max_{k \in C_i} (\mathbf{x}'_{ik}\boldsymbol{\beta} + \epsilon_{ik})]$$

Multinomial Logit and Conditional Logit

When explanatory variables contain only individual characteristics, the multinomial logit model is defined as

$$P(y_i = j) = P_{ij} = \frac{\exp(\mathbf{x}'_i \boldsymbol{\beta}_j)}{\sum_{k=0}^J \exp(\mathbf{x}'_i \boldsymbol{\beta}_k)} \quad \text{for } j = 0, \dots, J$$

where y_i is a random variable that indicates the choice made, x_i is a vector of characteristics specific to the i th individual, and $\boldsymbol{\beta}_j$ is a vector of coefficients specific to the j th alternative. Thus, this model involves choice-specific coefficients and only individual specific regressors. For model identification, it is often assumed that $\boldsymbol{\beta}_0 = 0$. The multinomial logit model reduces to the binary logit model if $J = 1$.

The ratio of the choice probabilities for alternatives j and l (the *odds ratio* of alternatives j and l) is

$$\frac{P_{ij}}{P_{il}} = \frac{\exp(\mathbf{x}'_i \boldsymbol{\beta}_j) / \sum_{k=0}^J \exp(\mathbf{x}'_i \boldsymbol{\beta}_k)}{\exp(\mathbf{x}'_i \boldsymbol{\beta}_l) / \sum_{k=0}^J \exp(\mathbf{x}'_i \boldsymbol{\beta}_k)} = \exp[\mathbf{x}'_i (\boldsymbol{\beta}_j - \boldsymbol{\beta}_l)]$$

Note that the odds ratio of alternatives j and l does not depend on any alternatives other than j and l . For more information, see the section “[Independence from Irrelevant Alternatives \(IIA\)](#)” on page 981.

The log-likelihood function of the multinomial logit model is

$$\mathcal{L} = \sum_{i=1}^N \sum_{j=0}^J d_{ij} \ln P(y_i = j)$$

where

$$d_{ij} = \begin{cases} 1 & \text{if individual } i \text{ chooses alternative } j \\ 0 & \text{otherwise} \end{cases}$$

This type of multinomial choice modeling has a couple of weaknesses: it has too many parameters (the number of individual characteristics times J), and it is difficult to interpret. The multinomial logit model can be used to predict the choice probabilities, among a given set of $J + 1$ alternatives, of an individual with known vector of characteristics \mathbf{x}_i .

The parameters of the multinomial logit model can be estimated with the TYPE=CLOGIT option in the MODEL statement; however, this requires modification of the conditional logit model to allow individual specific effects.

The conditional logit model, sometimes called the multinomial logit model, is similarly defined when choice-specific data are available. Using properties of Type I extreme-value (Gumbel) distribution, the probability that individual i chooses alternative j from among the choices in his choice set C_i is

$$P(y_i = j) = P_{ij} = P[\mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij} \geq \max_{k \in C_i, k \neq j} (\mathbf{x}'_{ik}\boldsymbol{\beta} + \epsilon_{ik})] = \frac{\exp(\mathbf{x}'_{ij}\boldsymbol{\beta})}{\sum_{k \in C_i} \exp(\mathbf{x}'_{ik}\boldsymbol{\beta})}$$

where \mathbf{x}_{ij} is a vector of attributes specific to the j th alternative as perceived by the i th individual. It is assumed that there are n_i choices in each individual's choice set, C_i .

The log-likelihood function of the conditional logit model is

$$\mathcal{L} = \sum_{i=1}^N \sum_{j \in C_i} d_{ij} \ln P(y_i = j)$$

The conditional logit model can be used to predict the probability that an individual will choose a previously unavailable alternative, given knowledge of $\boldsymbol{\beta}$ and the vector \mathbf{x}_{ij} of choice-specific characteristics.

Independence from Irrelevant Alternatives (IIA)

The problematic aspect of the conditional logit (and the multinomial logit) model lies in the property of independence from irrelevant alternatives (IIA). The IIA property can be derived from the probability ratio of any two choices. For the conditional logit model,

$$\frac{P_{ij}}{P_{il}} = \frac{\exp(\mathbf{x}'_{ij}\boldsymbol{\beta}) / \sum_{k \in C_i} \exp(\mathbf{x}'_{ik}\boldsymbol{\beta})}{\exp(\mathbf{x}'_{il}\boldsymbol{\beta}) / \sum_{k \in C_i} \exp(\mathbf{x}'_{ik}\boldsymbol{\beta})} = \exp[(\mathbf{x}_{ij} - \mathbf{x}_{il})'\boldsymbol{\beta}]$$

It is evident that the ratio of the probabilities for alternatives j and l does not depend on any alternatives other than j and l . This was also shown to be the case for the multinomial logit model. Thus, for the conditional and multinomial logit models, the ratio of probabilities of any two alternatives is necessarily the same regardless of what other alternatives are in the choice set or what the characteristics of the other alternatives are. This is referred to as the IIA property.

The IIA property is useful from the point of view of estimation and forecasting. For example, it allows the prediction of demand for currently unavailable alternatives. If the IIA property is appropriate for the choice situation being considered, then estimation can be based on the set of currently available alternatives, and then the estimated model can be used to calculate the probability that an individual would choose a new alternative not considered in the estimation procedure. However, the IIA property is restrictive from the point of view of choice behavior. Models that display the IIA property predict that a change in the attributes of one alternative changes the probabilities of the other alternatives proportionately such that the ratios of probabilities remain constant. Thus, cross elasticities due to a change in the attributes of an alternative j are equal for all alternatives $k \neq j$. This particular substitution pattern might be too restrictive in some choice settings.

The IIA property of the conditional logit model follows from the assumption that the random components of utility are identically and independently distributed. The other models in PROC MDC (namely, nested logit, HEV, mixed logit, and multinomial probit) relax the IIA property in different ways.

For an example of Hausman's specification test of IIA assumption, see "Example 18.6: Hausman's Specification Test" on page 1015.

Heteroscedastic Extreme-Value Model

The heteroscedastic extreme-value (HEV) model (Bhat 1995) allows the random components of the utility function to be nonidentical. Specifically, the HEV model assumes independent but nonidentical error terms distributed with the Type I extreme-value distribution. The HEV model allows the variances of the random components of utility to differ across alternatives. Bhat (1995) argues that the HEV model does not have the IIA property. The HEV model contains the conditional logit model as a special case. The probability that an individual i will choose alternative j from the set C_i of available alternatives is

$$P_i(j) = \int_{-\infty}^{\infty} \prod_{k \in C_i, k \neq j} \Gamma \left[\frac{\mathbf{x}'_{ij} \boldsymbol{\beta} - \mathbf{x}'_{ik} \boldsymbol{\beta} + \theta_j w}{\theta_k} \right] \gamma(w) dw$$

where the choice set C_i has n_i elements and

$$\Gamma(x) = \exp(-\exp(-x))$$

$$\gamma(x) = \exp(-x)\Gamma(x)$$

are the cumulative distribution function and probability density function of the Type I extreme-value distribution. The variance of the error term for the j th alternative is $\frac{1}{6}\pi^2\theta_j^2$. If the scale parameters, θ_j , of the random components of utility of all alternatives are equal, then this choice probability is the same as that of the conditional logit model. The log-likelihood function of the HEV model can be written as

$$\mathcal{L} = \sum_{i=1}^N \sum_{j \in C_i} d_{ij} \ln[P_i(j)]$$

where

$$d_{ij} = \begin{cases} 1 & \text{if individual } i \text{ chooses alternative } j \\ 0 & \text{otherwise} \end{cases}$$

Since the log-likelihood function contains an improper integral function, it is computationally difficult to get a stable estimate. With the transformation $u = \exp(-w)$, the probability can be written

$$\begin{aligned} P_i(j) &= \int_0^{\infty} \prod_{k \in C_i, k \neq j} \Gamma \left[\frac{\mathbf{x}'_{ij} \boldsymbol{\beta} - \mathbf{x}'_{ik} \boldsymbol{\beta} - \theta_j \ln(u)}{\theta_k} \right] \exp(-u) du \\ &= \int_0^{\infty} G_{ij}(u) \exp(-u) du \end{aligned}$$

Using the Gauss-Laguerre weight function, $W(x) = \exp(-u)$, the integration of the log-likelihood function can be replaced with a summation as follows:

$$\int_0^{\infty} G_{ij}(u) \exp(-u) du = \sum_{k=1}^K w_k G_{ij}(x_k)$$

Weights (w_k) and abscissas (x_k) are tabulated by Abramowitz and Stegun (1970).

Mixed Logit Model

In mixed logit models, an individual's utility from any alternative can be decomposed into a deterministic component, $\mathbf{x}'_{ij}\boldsymbol{\beta}$, which is a linear combination of observed variables, and a stochastic component, $\xi_{ij} + \epsilon_{ij}$,

$$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \xi_{ij} + \epsilon_{ij}$$

where \mathbf{x}_{ij} is a vector of observed variables that relate to individual i and alternative j , $\boldsymbol{\beta}$ is a vector of parameters, ξ_{ij} is an error component that can be correlated among alternatives and heteroscedastic for each individual, and ϵ_{ij} is a random term with zero mean that is independently and identically distributed over alternatives and individuals. The conditional logit model is derived if you assume ϵ_{ij} has an iid Gumbel distribution and $V(\xi_{ij}) = 0$.

The mixed logit model assumes a general distribution for ξ_{ij} and an iid Gumbel distribution for ϵ_{ij} . Denote the density function of the error component ξ_{ij} as $f(\xi_{ij}|\boldsymbol{\gamma})$, where $\boldsymbol{\gamma}$ is a parameter vector of the distribution of ξ_{ij} . The choice probability of alternative j for individual i is written as

$$P_i(j) = \int Q_i(j|\xi_{ij})f(\xi_{ij}|\boldsymbol{\gamma})d\xi_{ij}$$

where the conditional choice probability for a given value of ξ_{ij} is the logit

$$Q_i(j|\xi_{ij}) = \frac{\exp(\mathbf{x}'_{ij}\boldsymbol{\beta} + \xi_{ij})}{\sum_{k \in C_i} \exp(\mathbf{x}'_{ik}\boldsymbol{\beta} + \xi_{ik})}$$

Since ξ_{ij} is not given, the unconditional choice probability, $P_i(j)$, is the integral of the conditional choice probability, $Q_i(j|\xi_{ij})$, over the distribution of ξ_{ij} . This model is called “mixed logit” since the choice probability is a mixture of logits with $f(\xi_{ij}|\boldsymbol{\gamma})$ as the mixing distribution.

In general, the mixed logit model does not have an exact likelihood function because the probability $P_i(j)$ does not always have a closed form solution. Therefore, a simulation method is used for computing the approximate probability,

$$\tilde{P}_i(j) = 1/S \sum_{s=1}^S \tilde{Q}_i(j|\xi_{ij}^s)$$

where S is the number of simulation replications and $\tilde{P}_i(j)$ is a simulated probability. The simulated log-likelihood function is computed as

$$\tilde{\mathcal{L}} = \sum_{i=1}^N \sum_{j=1}^{n_i} d_{ij} \ln(\tilde{P}_i(j))$$

where

$$d_{ij} = \begin{cases} 1 & \text{if individual } i \text{ chooses alternative } j \\ 0 & \text{otherwise} \end{cases}$$

For simulation purposes, assume that the error component has a specific structure,

$$\xi_{ij} = \mathbf{z}'_{ij}\boldsymbol{\mu} + \mathbf{w}'_{ij}\boldsymbol{\beta}^*$$

where \mathbf{z}_{ij} is a vector of observed data and $\boldsymbol{\mu}$ is a random vector with zero mean and density function $\psi(\boldsymbol{\mu}|\boldsymbol{\gamma})$. The observed data vector (\mathbf{z}_{ij}) of the error component can contain some or all elements of \mathbf{x}_{ij} . The component $\mathbf{z}'_{ij}\boldsymbol{\mu}$ induces heteroscedasticity and correlation across unobserved utility components of the alternatives. This allows flexible substitution patterns among the alternatives. The k th element of vector $\boldsymbol{\mu}$ is distributed as

$$\mu_k \sim (0, \sigma_k^2)$$

Therefore, μ_k can be specified as

$$\mu_k = \sigma_k \epsilon_\mu$$

where

$$\epsilon_\mu \sim N(0, 1)$$

or

$$\epsilon_\mu \sim U(-\sqrt{3}, \sqrt{3})$$

In addition, $\boldsymbol{\beta}^*$ is a vector of random parameters (random coefficients). Random coefficients allow heterogeneity across individuals in their sensitivity to observed exogenous variables. The observed data vector, \mathbf{w}_{ij} , is a subset of \mathbf{x}_{ij} . The following three types of distributions for the random coefficients are supported, where the m th element of $\boldsymbol{\beta}^*$ is denoted as β_m^* :

- Normally distributed coefficient with the mean b_m and spread s_m being estimated.

$$\beta_m^* = b_m + s_m \epsilon_\beta \quad \text{and} \quad \epsilon_\beta \sim N(0, 1)$$

- Uniformly distributed coefficient with the mean b_m and spread s_m being estimated. A uniform distribution with mean b and spread s is $U(b - s, b + s)$.

$$\beta_m^* = b_m + s_m \epsilon_\beta \quad \text{and} \quad \epsilon_\beta \sim U(-1, 1)$$

- Lognormally distributed coefficient. The coefficient is calculated as

$$\beta_m^* = \exp(b_m + s_m \epsilon_\beta) \quad \text{and} \quad \epsilon_\beta \sim N(0, 1)$$

where b_m and s_m are parameters that are estimated.

The estimate of spread for normally, uniformly, and lognormally distributed coefficients can be negative. The absolute value of the estimated spread can be interpreted as an estimate of standard deviation for normally distributed coefficients.

A detailed description of mixed logit models can be found, for example, in Brownstone and Train (1999).

Multinomial Probit

The multinomial probit model allows the random components of the utility of the different alternatives to be nonindependent and nonidentical. Thus, it does not have the IIA property. The increase in the flexibility of the error structure comes at the expense of introducing several additional parameters in the covariance matrix of the errors.

Consider the random utility function

$$U_{ij} = \mathbf{x}'_{ij}\boldsymbol{\beta} + \epsilon_{ij}$$

where the joint distribution of $(\epsilon_{i1}, \epsilon_{i2}, \dots, \epsilon_{iJ})$ is multivariate normal:

$$\begin{bmatrix} \epsilon_{i1} \\ \epsilon_{i2} \\ \vdots \\ \epsilon_{iJ} \end{bmatrix} \sim N(\mathbf{0}, \boldsymbol{\Sigma})$$

$$\boldsymbol{\Sigma} = [\sigma_{jk}]_{j,k=1,\dots,J}$$

The dimension of the error covariance matrix is determined by the number of alternatives J . Given $(\mathbf{x}_{i1}, \mathbf{x}_{i2}, \dots, \mathbf{x}_{iJ})$, the j th alternative is chosen if and only if $U_{ij} \geq U_{ik}$ for all $k \neq j$. Thus, the probability that the j th alternative is chosen is

$$P(y_i = j) = P_{ij} = P[\epsilon_{i1} - \epsilon_{ij} < (\mathbf{x}_{ij} - \mathbf{x}_{i1})'\boldsymbol{\beta}, \dots, \epsilon_{iJ} - \epsilon_{ij} < (\mathbf{x}_{iJ} - \mathbf{x}_{ij})'\boldsymbol{\beta}]$$

where y_i is a random variable that indicates the choice made. This is a cumulative probability from a $(J-1)$ -variate normal distribution. Since evaluation of this probability involves multidimensional integration, it is practical to use a simulation method to estimate the model. Many studies have shown that the simulators proposed by Geweke (1989), Hajivassiliou (1993), and Keane (1994) (GHK) perform well. For example, Hajivassiliou, McFadden, and Ruud (1996) compare 13 simulators using 11 different simulation methods and conclude that the GHK simulation method is the most reliable. To compute the probability of the multivariate normal distribution, the recursive simulation method is used. Refer to Hajivassiliou (1993) for more details about GHK simulators.

The log-likelihood function for the multinomial probit model can be written as

$$\mathcal{L} = \sum_{i=1}^N \sum_{j=1}^J d_{ij} \ln P(y_i = j)$$

where

$$d_{ij} = \begin{cases} 1 & \text{if individual } i \text{ chooses alternative } j \\ 0 & \text{otherwise} \end{cases}$$

For identification of the multinomial probit model, two of the diagonal elements of $\boldsymbol{\Sigma}$ are normalized to 1, and it is assumed that for one of the choices whose error variance is normalized to 1 (say, k), it is also true that $\sigma_{jk} = \sigma_{kj} = 0$ for $j = 1, \dots, J$ and $j \neq k$. Thus, a model with J alternatives has at most $J(J-1)/2 - 1$ covariance parameters after normalization.

Let D and R be defined as

$$D = \begin{bmatrix} \sigma_1 & 0 & \cdots & 0 \\ 0 & \sigma_2 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & \sigma_J \end{bmatrix}$$

$$R = \begin{bmatrix} 1 & \rho_{12} & \cdots & \rho_{1J} \\ \rho_{21} & 1 & \cdots & \rho_{2J} \\ \vdots & \vdots & \ddots & \vdots \\ \rho_{J1} & \rho_{J2} & \cdots & 1 \end{bmatrix}$$

where $\sigma_j^2 = \sigma_{jj}$ and $\rho_{jk} = \frac{\sigma_{jk}}{\sigma_j \sigma_k}$. Then, for identification, $\sigma_{J-1} = \sigma_J = 1$ and $\rho_{kJ} = \rho_{Jk} = 0$, for all $k \neq J$ can be imposed, and the error covariance matrix is $\Sigma = DRD$.

In the standard MDC output, the parameter estimates STD_j and RHO_jk correspond to σ_j and ρ_{jk} .

In principle, the multinomial probit model is fully identified with the preceding normalizations. However, in practice, convergence in applications of the model with more than three alternatives often requires additional restrictions on the elements of Σ .

It must also be noted that the unrestricted structure of the error covariance matrix makes it impossible to forecast demand for a new alternative without knowledge of the new $(J + 1)$ by $(J + 1)$ error covariance matrix.

Nested Logit

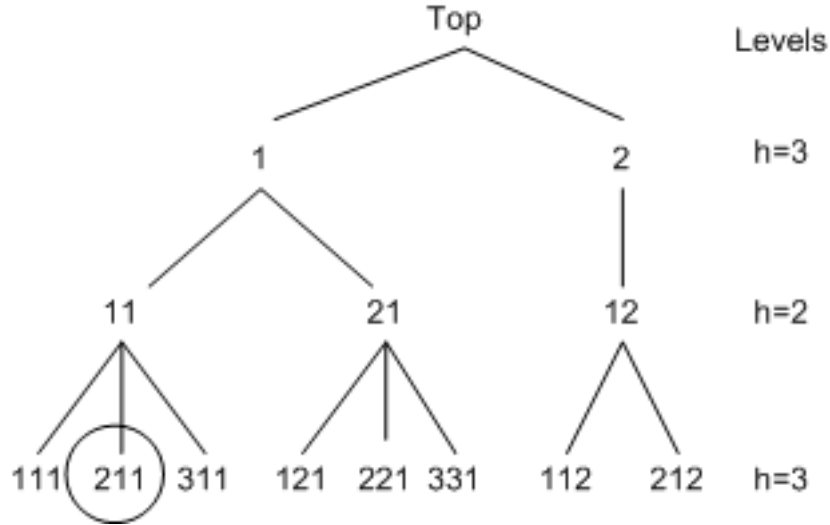
The nested logit model (McFadden 1978, 1981) allows partial relaxation of the assumption of independence of the stochastic components of utility of alternatives. In some choice situations, the IIA property holds for some pairs of alternatives but not all. In these situations, the nested logit model can be used if the set of alternatives faced by an individual can be partitioned into subsets such that the IIA property holds within subsets but not across subsets.

In the nested logit model, the joint distribution of the errors is generalized extreme value (GEV). This is a generalization of the Type I extreme-value distribution that gives rise to the conditional logit model. Note that all ϵ_{ij} within each subset are correlated with each other. Refer to McFadden (1978, 1981) for details.

Nested logit models can be described analytically following the notation of McFadden (1981). Assume that there are L levels, with 1 representing the lowest and L representing the highest level of the tree. The index of a node at level h in the tree is a pair (j_h, π_h) , where $\pi_h = (j_{h+1}, \dots, j_L)$ is the index of the adjacent node at level $h + 1$. Thus, the primitive alternatives, at level 1 in the tree, are indexed by vectors (j_1, \dots, j_L) , and the alternative nodes at level L are indexed by integers j_L . The choice set C_{π_h} is the set of primitive alternatives (at level 1) that belong to branches below the node π_h . The notation C_{π_h} is also used to denote a set of indices j_h such that (j_h, π_h) is a node immediately below π_h . Note that C_{π_0} is a set with a single element, while C_{π_L} represents a choice set that contains all possible alternatives. As an example, consider the circled node at level 1 in Figure 18.26. Since it stems from node 11, $\pi_h = 11$, and since it is the second node stemming from 11, $j_h = 2$, its index is $\pi_{h-1} = \pi_0 = (j_h, \pi_h) = 211$. Similarly, $C_{11} = \{111, 211, 311\}$ contains all the possible choices below 11.

Although this notation is useful for writing closed-form solutions for probabilities, the MDC procedure allows a more flexible definition of indices. See the section “NEST Statement” on page 972 for more details about how to describe decision trees within the MDC procedure.

Figure 18.26 Node Indices for a Three-Level Tree



Let $\mathbf{x}_{i;j_h\pi_h}^{(h)}$ denote the vector of observed variables for individual i common to the alternatives below node $j_h\pi_h$. The probability of choice at level h has a closed-form solution and is written

$$P_i(j_h|\pi_h) = \frac{\exp\left[\mathbf{x}_{i;j_h\pi_h}^{(h)'}\boldsymbol{\beta}^{(h)} + \sum_{k \in C_{i;j_h\pi_h}} I_{k,j_h\pi_h}\theta_{k,j_h\pi_h}\right]}{\sum_{j \in C_{i;\pi_h}} \exp\left[\mathbf{x}_{i;j\pi_h}^{(h)'}\boldsymbol{\beta}^{(h)} + \sum_{k \in C_{i;j\pi_h}} I_{k,j\pi_h}\theta_{k,j\pi_h}\right]}, h = 2, \dots, L$$

where I_{π_h} is the *inclusive value* (at level $h + 1$) of the branch below node π_h and is defined recursively as follows:

$$I_{\pi_h} = \ln \left\{ \sum_{j \in C_{i;\pi_h}} \exp \left[\mathbf{x}_{i;j\pi_h}^{(h)'}\boldsymbol{\beta}^{(h)} + \sum_{k \in C_{i;j\pi_h}} I_{k,j\pi_h}\theta_{k,j\pi_h} \right] \right\}$$

$$0 \leq \theta_{k,\pi_1} \leq \dots \leq \theta_{k,\pi_{L-1}}$$

The inclusive value I_{π_h} denotes the average utility that the individual can expect from the branch below π_h . The *dissimilarity parameters* or *inclusive value parameters* ($\theta_{k,j\pi_h}$) are the coefficients of the inclusive values and have values between 0 and 1 if nested logit is the correct model specification. When they all take value 1, the nested logit model is equivalent to the conditional logit model.

At decision level 1, there is no inclusive value; that is, $I_{\pi_0} = 0$. Therefore, the conditional probability is

$$P_i(j_1|\pi_1) = \frac{\exp\left[\mathbf{x}_{i;j_1\pi_1}^{(1)'}\boldsymbol{\beta}^{(1)}\right]}{\sum_{j \in C_{i;\pi_1}} \exp\left[\mathbf{x}_{i;j\pi_1}^{(1)'}\boldsymbol{\beta}^{(1)}\right]}$$

The log-likelihood function at level h can then be written

$$\mathcal{L}^{(h)} = \sum_{i=1}^N \sum_{\pi_{h'} \in C_{i,\pi_{h+1}}} \sum_{j \in C_{i,\pi_{h'}}} y_{i,j\pi_{h'}} \ln P(C_{i,j\pi_{h'}} | C_{i,\pi_{h'}})$$

where $y_{i,j\pi_{h'}}$ is an indicator variable that has the value of 1 for the selected choice. The full log-likelihood function of the nested logit model is obtained by adding the conditional log-likelihood functions at each level:

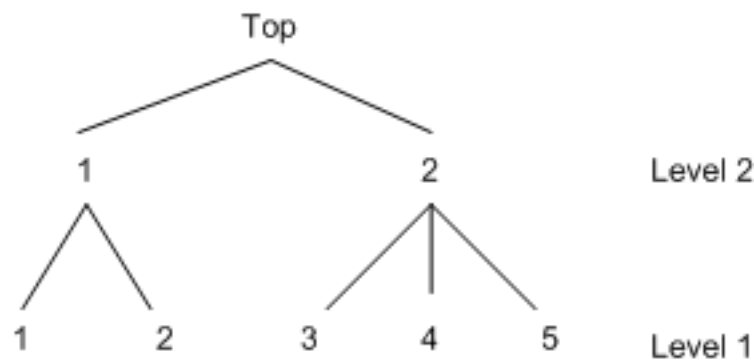
$$\mathcal{L} = \sum_{h=1}^L \mathcal{L}^{(h)}$$

Note that the log-likelihood functions are computed from conditional probabilities when $h < L$. The nested logit model is estimated using the full information maximum likelihood method.

Decision Tree and Nested Logit

You can view choices as a decision tree and model the decision tree by using the nested logit model. You need to use either the NEST statement or the CHOICE= option of the MODEL statement to specify the nested tree structure. Additionally, you need to identify which explanatory variables are used at each level of the decision tree. These explanatory variables are arguments for what is called a *utility function*. The utility function is specified using UTILITY statements. For example, consider a two-level decision tree. The tree structure is displayed in Figure 18.27.

Figure 18.27 Two-Level Decision Tree



A nested logit model with two levels can be specified using the following SAS statements:

```
proc mdc data=one type=nlogit;
  model decision = x1 x2 x3 x4 x5 /
    choice=(upmode 1 2, mode 1 2 3 4 5);
  id pid;
  utility u(1, 3 4 5 @ 2) = x1 x2,
    u(1, 1 2 @ 1) = x3 x4,
```

```

        u(2, 1 2) = x5;
run;

```

The DATA=one data set should be arranged as follows:

obs	pid	upmode	mode	x1	x2	x3	x4	x5	decision
1	1	1	1	#	#	#	#	#	1
2	1	1	2	#	#	#	#	#	0
3	1	2	3	#	#	#	#	#	0
4	1	2	4	#	#	#	#	#	0
5	1	2	5	#	#	#	#	#	0
6	2	1	1	#	#	#	#	#	0
7	2	1	2	#	#	#	#	#	0
8	2	2	3	#	#	#	#	#	0
9	2	2	4	#	#	#	#	#	0
10	2	2	5	#	#	#	#	#	1

All model variables, x1 through x5, are specified in the UTILITY statement. It is required that entries denoted as # have values for model estimation and prediction. The values of the level 2 utility variable x5 should be the same for all the primitive (level 1) alternatives below node 1 at level 2 and, similarly, for all the primitive alternatives below node 2 at level 2. In other words, x5 should have the same value for primitive alternatives 1 and 2 and, similarly, it should have the same value for primitive alternatives 3, 4, and 5. More generally, the values of any level 2 or higher utility function variables should be constant across primitive alternatives under each node for which the utility function applies. Since PROC MDC expects this to be the case, it uses the values of x5 only for the primitive alternatives 1 and 3, ignoring the values for the primitive alternatives 2, 4, and 5. Thus, PROC MDC uses the values of the utility function variable only for the primitive alternatives that come first under each node for which the utility function applies. This behavior applies to any utility function variables that are specified above the first level. The choice variable for level 2 (upmode) should be placed before the first-level choice variable (mode) when the CHOICE= option is specified. Alternatively, the NEST statement can be used to specify the decision tree. The following SAS statements fit the same nested logit model:

```

proc mdc data=a type=nlogit;
  model decision = x1 x2 x3 x4 x5 /
    choice=(mode 1 2 3 4 5);
  id pid;
  utility u(1, 3 4 5 @ 2) = x1 x2,
    u(1, 1 2 @ 1) = x3 x4,
    u(2, 1 2) = x5;
  nest level(1) = (1 2 @ 1, 3 4 5 @ 2),
    level(2) = (1 2 @ 1);
run;

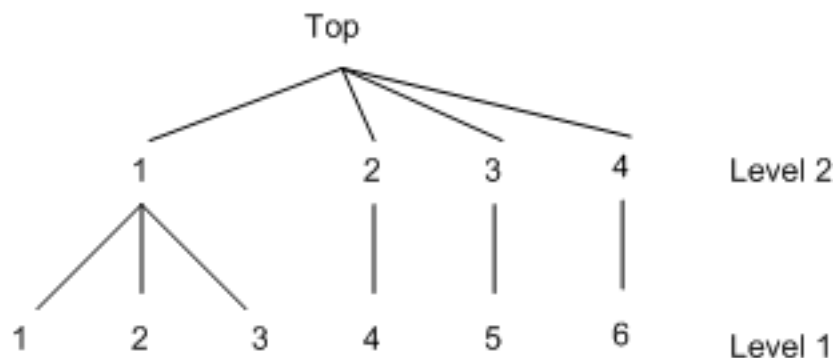
```

The U(1, 3 4 5 @ 2)= option specifies three choices, 3, 4, and 5, at level 1 of the decision tree. They are connected to the upper branch 2. The specified variables (x1 and x2) are used to model this utility function. The bottom level of the decision tree is level 1. All variables in the UTILITY statement must be included in the MODEL statement. When all choices at the first level share the same variables, you can omit the second argument of the U()= option for that level. However, U(1,) = x1 x2 is not equivalent to the following statements:

$u(1, 3 \ 4 \ 5 @ 2) = x_1 \ x_2;$
 $u(1, 1 \ 2 @ 1) = x_1 \ x_2;$

The CHOICE= variables need to be specified from the top to the bottom level. To forecast demand for new products, stated preference data are widely used. Stated preference data are attractive for market researchers because attribute variations can be controlled. Hensher (1993) explores the advantage of combining revealed preference (market data) and stated preference data. The scale factor (V_{rp}/V_{sp}) can be estimated using the nested logit model with the decision tree structure displayed in Figure 18.28.

Figure 18.28 Decision Tree for Revealed and Stated Preference Data



Example SAS statements are as follows:

```

proc mdc data=a type=nlogit;
  model decision = x1 x2 x3 /
    spscale
    choice=(mode 1 2 3 4 5 6);
  id pid;
  utility u(1,) = x1 x2 x3;
  nest level(1) = (1 2 3 @ 1, 4 @ 2, 5 @ 3, 6 @ 4),
    level(2) = (1 2 3 4 @ 1);
run;

```

The SPSCALE option specifies that parameters of inclusive values for nodes 2, 3, and 4 at level 2 be the same. When you specify the SAMESCALE option, the MDC procedure imposes the same coefficient of inclusive values for choices 1–4.

Model Fit and Goodness-of-Fit Statistics

McFadden (1974) suggests a likelihood ratio index that is analogous to the R-square in the linear regression model:

$$R_M^2 = 1 - \frac{\ln L}{\ln L_0}$$

where L is the maximum of the log-likelihood function and L_0 is the maximum of the log-likelihood function when all coefficients, except for an intercept term, are zero. McFadden's likelihood ratio index is bounded by 0 and 1.

Estrella (1998) proposes the following requirements for a goodness-of-fit measure to be desirable in discrete choice modeling:

- The measure must take values in $[0, 1]$, where 0 represents no fit and 1 corresponds to perfect fit.
- The measure should be directly related to the valid test statistic for the significance of all slope coefficients.
- The derivative of the measure with respect to the test statistic should comply with corresponding derivatives in a linear regression.

Estrella's measure is written as

$$R_{E1}^2 = 1 - \left(\frac{\ln L}{\ln L_0} \right)^{-(2/N) \ln L_0}$$

Estrella suggests an alternative measure,

$$R_{E2}^2 = 1 - [(\ln L - K) / \ln L_0]^{-(2/N) \ln L_0}$$

where $\ln L_0$ is computed with null parameter values, N is the number of observations used, and K represents the number of estimated parameters.

Other goodness-of-fit measures are summarized as follows:

$$\begin{aligned} R_{CU1}^2 &= 1 - \left(\frac{L_0}{L} \right)^{\frac{2}{N}} && \text{(Cragg-Uhler 1)} \\ R_{CU2}^2 &= \frac{1 - (L_0/L)^{\frac{2}{N}}}{1 - L_0^{\frac{2}{N}}} && \text{(Cragg-Uhler 2)} \\ R_A^2 &= \frac{2(\ln L - \ln L_0)}{2(\ln L - \ln L_0) + N} && \text{(Aldrich-Nelson)} \\ R_{VZ}^2 &= R_A^2 \frac{2 \ln L_0 - N}{2 \ln L_0} && \text{(Veall-Zimmermann)} \end{aligned}$$

The AIC and SBC are computed as follows:

$$AIC = -2 \ln(L) + 2k$$

$$SBC = -2 \ln(L) + \ln(n)k$$

where $\ln(L)$ is the log-likelihood value for the model, k is the number of parameters estimated, and n is the number of observations (that is, the number of respondents).

Tests on Parameters

In general, the hypothesis to be tested can be written as

$$H_0 : \mathbf{h}(\theta) = 0$$

where $\mathbf{h}(\theta)$ is an r -by-1 vector-valued function of the parameters θ given by the r expressions specified in the TEST statement.

Let \hat{V} be the estimate of the covariance matrix of $\hat{\theta}$. Let $\hat{\theta}$ be the unconstrained estimate of θ and $\tilde{\theta}$ be the constrained estimate of θ such that $h(\tilde{\theta}) = 0$. Let

$$A(\theta) = \partial h(\theta) / \partial \theta \big|_{\hat{\theta}}$$

Using this notation, the test statistics for the three kinds of tests are computed as follows:

- The Wald test statistic is defined as

$$W = h'(\hat{\theta}) \left(A(\hat{\theta}) \hat{V} A'(\hat{\theta}) \right)^{-1} h(\hat{\theta})$$

The Wald test is not invariant to reparameterization of the model (Gregory and Veall 1985; Gallant 1987, p. 219). For more information about the theoretical properties of the Wald test, see Phillips and Park (1988).

- The Lagrange multiplier test statistic is

$$LM = \lambda' A(\tilde{\theta}) \tilde{V} A'(\tilde{\theta}) \lambda$$

where λ is the vector of Lagrange multipliers from the computation of the restricted estimate $\tilde{\theta}$.

- The likelihood ratio test statistic is

$$LR = 2 \left(L(\hat{\theta}) - L(\tilde{\theta}) \right)$$

where $\tilde{\theta}$ represents the constrained estimate of θ and L is the concentrated log-likelihood value.

For each kind of test, under the null hypothesis the test statistic is asymptotically distributed as a χ^2 random variable with r degrees of freedom, where r is the number of expressions in the TEST statement. The p -values reported for the tests are computed from the $\chi^2(r)$ distribution and are only asymptotically valid.

Monte Carlo simulations suggest that the asymptotic distribution of the Wald test is a poorer approximation to its small sample distribution than that of the other two tests. However, the Wald test has the lowest computational cost, since it does not require computation of the constrained estimate $\tilde{\theta}$.

The following statements are an example of using the TEST statement to perform a likelihood ratio test:

```
proc mdc;
  model decision = x1 x2 / type=clogit
    choice=(mode 1 2 3);
  id pid;
  test 0.5 * x1 + 2 * x2 = 0 / lr;
run;
```

OUTEST= Data Set

The OUTEST= data set contains all the parameters that are estimated in a MODEL statement. The OUTEST= option can be used when the PROC MDC call contains one MODEL statement. There are additional restrictions. For the HEV and multinomial probit models, you need to specify exactly all possible elements of the choice set, since additional parameters (for example, SCALE1 or STD1) are generated automatically in the MDC procedure. Therefore, the following SAS statements are not valid when the OUTEST= option is specified:

```
proc mdc data=a outest=e;
  model y = x / type=hev choice=(alter);
run;
```

You need to specify all possible choices in the CHOICE= option since the OUTEST= option is specified as follows:

```
proc mdc data=a outest=e;
  model y = x / type=hev choice=(alter 1 2 3);
run;
```

When the NCHOICE= option is specified, no additional information about possible choices is required. Therefore, the following SAS statements are correct:

```
proc mdc data=a outest=e;
  model y = x / type=mprobit nchoice=3;
run;
```

The nested logit model does not produce the OUTEST= data set unless the NEST statement is specified.

Each parameter contains the estimate for the corresponding parameter in the corresponding model. In addition, the OUTEST= data set contains the following variables:

<u>_DEPVAR_</u>	the name of the dependent variable
<u>_METHOD_</u>	the estimation method
<u>_MODEL_</u>	the label of the MODEL statement if one is specified, or blank otherwise
<u>_STATUS_</u>	a character variable that indicates whether the optimization process reached convergence or failed to converge: 0 indicates that the convergence was reached, 1 indicates that the maximum number of iterations allowed was exceeded, 2 indicates a failure to improve the function value, and 3 indicates a failure to converge because the objective function or its derivatives could not be evaluated or improved, or linear constraints were dependent, or the algorithm failed to return to feasible region, or the number of iterations was greater than prespecified.
<u>_NAME_</u>	the name of the row of the covariance matrix for the parameter estimate, if the COVOUT option is specified, or blank otherwise

<code>_LIKLHD_</code>	the log-likelihood value
<code>_STDERR_</code>	standard error of the parameter estimate, if the COVOUT option is specified
<code>_TYPE_</code>	PARMS for observations that contain parameter estimates, or COV for observations that contain covariance matrix elements

The OUTEST= data set contains one observation for the MODEL statement giving the parameter estimates for that model. If the COVOUT option is specified, the OUTEST= data set includes additional observations for the MODEL statement giving the rows of the covariance matrix of parameter estimates. For covariance observations, the value of the `_TYPE_` variable is COV, and the `_NAME_` variable identifies the parameter associated with that row of the covariance matrix.

ODS Table Names

PROC MDC assigns a name to each table it creates. You can use these names to denote the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the Table 18.3.

Table 18.3 ODS Tables Produced in PROC MDC

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ResponseProfile	Response profile	Default
ClassLevels	Class levels	Default
FitSummary	Summary of nonlinear estimation	Default
GoodnessOfFit	Pseudo-R-square measures	Default
ConvergenceStatus	Convergence status	Default
ParameterEstimates	Parameter estimates	Default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlation of parameter estimates	CORRB
LinCon	Linear constraints	ITPRINT
InputOptions	Input options	ITPRINT
ProblemDescription	Problem description	ITPRINT
IterStart	Optimization start	ITPRINT
IterHist	Iteration history	ITPRINT
IterStop	Optimization results	ITPRINT
ConvergenceStatus	Convergence status	ITPRINT
ParameterEstimatesResults	Resulting parameters	ITPRINT
LinConSol	Linear constraints evaluated at solution	ITPRINT
ODS Tables Created by the TEST Statement		
TestResults	Test results	Default

Examples: MDC Procedure

Example 18.1: Binary Data Modeling

The MDC procedure supports various multinomial choice models. However, you can also use PROC MDC to estimate binary choice models such as binary logit and probit because these models are special cases of multinomial models.

Spector and Mazzeo (1980) studied the effectiveness of a new teaching method on students' performance in an economics course. They reported grade point average (gpa), previous knowledge of the material (tuce), a dummy variable for the new teaching method (psi), and the final course grade (grade). A value of 1 is recorded for grade if a student earned the letter grade "A," and 0 otherwise.

The binary logit can be estimated using the conditional logit model. In order to use the MDC procedure, the data are converted as follows so that each possible choice corresponds to one observation:

```
data smdata;
  input gpa tuce psi grade;
datalines;
2.66      20      0      0
2.89      22      0      0
3.28      24      0      0

... more lines ...
```

```
data smdata1;
  set smdata;
  retain id 0;
  id + 1;

  /*-- first choice --*/
  choicel = 1;
  choice2 = 0;
  decision = (grade = 0);
  gpa_2 = 0;
  tuce_2 = 0;
  psi_2 = 0;
  output;

  /*-- second choice --*/
  choicel = 0;
  choice2 = 1;
  decision = (grade = 1);
  gpa_2 = gpa;
  tuce_2 = tuce;
  psi_2 = psi;
  output;
run;
```

The first 10 observations are displayed in [Output 18.1.1](#). The variables related to grade=0 are omitted since these are not used for binary choice model estimation.

Output 18.1.1 Converted Binary Data

	id	decision	choice2	gpa_2	tuce_2	psi_2
	1	1	0	0.00	0	0
	1	0	1	2.66	20	0
	2	1	0	0.00	0	0
	2	0	1	2.89	22	0
	3	1	0	0.00	0	0
	3	0	1	3.28	24	0
	4	1	0	0.00	0	0
	4	0	1	2.92	12	0
	5	0	0	0.00	0	0
	5	1	1	4.00	21	0

Consider the choice probability of the conditional logit model for binary choice:

$$P_i(j) = \frac{\exp(\mathbf{x}'_{ij}\boldsymbol{\beta})}{\sum_{k=1}^2 \exp(\mathbf{x}'_{ik}\boldsymbol{\beta})}, \quad j = 1, 2$$

The choice probability of the binary logit model is computed based on normalization. The preceding conditional logit model can be converted as

$$P_i(1) = \frac{1}{1 + \exp((\mathbf{x}_{i2} - \mathbf{x}_{i1})'\boldsymbol{\beta})}$$

$$P_i(2) = \frac{\exp((\mathbf{x}_{i2} - \mathbf{x}_{i1})'\boldsymbol{\beta})}{1 + \exp((\mathbf{x}_{i2} - \mathbf{x}_{i1})'\boldsymbol{\beta})}$$

Therefore, you can interpret the binary choice data as the difference between the first and second choice characteristics. In the following statements, it is assumed that $\mathbf{x}_{i1} = \mathbf{0}$. The binary logit model is estimated and displayed in [Output 18.1.2](#).

```

/*-- Conditional Logit --*/
proc mdc data=smdatal;
  model decision = choice2 gpa_2 tuce_2 psi_2 /
    type=clogit
    nchoice=2
    covest=hess;
  id id;
run;

```

Output 18.1.2 Binary Logit Estimates

The MDC Procedure					
Conditional Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
choice2	1	-13.0213	4.9313	-2.64	0.0083
gpa_2	1	2.8261	1.2629	2.24	0.0252
tuce_2	1	0.0952	0.1416	0.67	0.5014
psi_2	1	2.3787	1.0646	2.23	0.0255

Consider the choice probability of the multinomial probit model:

$$P_i(j) = P[\epsilon_{i1} - \epsilon_{ij} < (\mathbf{x}_{ij} - \mathbf{x}_{i1})'\boldsymbol{\beta}, \dots, \epsilon_{iJ} - \epsilon_{ij} < (\mathbf{x}_{iJ} - \mathbf{x}_{ij})'\boldsymbol{\beta}]$$

The probabilities of choice of the two alternatives can be written as

$$P_i(1) = P[\epsilon_{i2} - \epsilon_{i1} < (\mathbf{x}_{i1} - \mathbf{x}_{i2})'\boldsymbol{\beta}]$$

$$P_i(2) = P[\epsilon_{i1} - \epsilon_{i2} < (\mathbf{x}_{i2} - \mathbf{x}_{i1})'\boldsymbol{\beta}]$$

where $\begin{bmatrix} \epsilon_{i1} \\ \epsilon_{i2} \end{bmatrix} \sim N\left(\mathbf{0}, \begin{bmatrix} \sigma_1^2 & \sigma_{12} \\ \sigma_{12} & \sigma_2^2 \end{bmatrix}\right)$. Assume that $\mathbf{x}_{i1} = \mathbf{0}$ and $\sigma_{12} = 0$. The binary probit model is estimated and displayed in [Output 18.1.3](#). You do not get the same estimates as that of the usual binary probit model. The probabilities of choice in the binary probit model are

$$P_i(2) = P[\epsilon_i < \mathbf{x}_i'\boldsymbol{\beta}]$$

$$P_i(1) = 1 - P[\epsilon_i < \mathbf{x}_i'\boldsymbol{\beta}]$$

where $\epsilon_i \sim N(0, 1)$. However, the multinomial probit model has the error variance $\text{Var}(\epsilon_{i2} - \epsilon_{i1}) = \sigma_1^2 + \sigma_2^2$ if ϵ_{i1} and ϵ_{i2} are independent ($\sigma_{12} = 0$). In the following statements, unit variance restrictions are imposed on choices 1 and 2 ($\sigma_1^2 = \sigma_2^2 = 1$). Therefore, the usual binary probit estimates (and standard errors) can be obtained by multiplying the multinomial probit estimates (and standard errors) in [Output 18.1.3](#) by $1/\sqrt{2}$.

```

/*-- Multinomial Probit --*/
proc mdc data=smdatal;
  model decision = choice2 gpa_2 tuce_2 psi_2 /
    type=mprobit
    nchoice=2
    covest=hess
    unitvariance=(1 2);
  id id;
run;

```

Output 18.1.3 Binary Probit Estimates

The MDC Procedure					
Multinomial Probit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
choice2	1	-10.5392	3.5956	-2.93	0.0034
gpa_2	1	2.2992	0.9813	2.34	0.0191
tuce_2	1	0.0732	0.1186	0.62	0.5375
psi_2	1	2.0171	0.8415	2.40	0.0165

Example 18.2: Conditional Logit and Data Conversion

In this example, data are prepared for use by the MDCDATA statement. Sometimes, choice-specific information is stored in multiple variables. Since the MDC procedure requires multiple observations for each decision maker, you need to arrange the data so that there is an observation for each subject-alternative (individual-choice) combination. Simple binary choice data are obtained from Ben-Akiva and Lerman (1985). The following statements create the SAS data set:

```
data travel;
  length mode $ 8;
  input auto transit mode $;
datalines;
52.9  4.4 Transit
4.1   28.5 Transit
4.1   86.9 Auto
56.2  31.6 Transit
51.8  20.2 Transit
0.2   91.2 Auto
27.6  79.7 Auto
89.9  2.2  Transit
41.5  24.5 Transit
95.0  43.5 Transit

... more lines ...
```

The travel time is stored in two variables, auto and transit. In addition, the chosen alternatives are stored in a character variable, mode. The choice variable, mode, is converted to a numeric variable, decision, since the MDC procedure supports only numeric variables. The following statements convert the original data set, travel, and estimate the binary logit model. The first 10 observations of a relevant subset of the new data set and the parameter estimates are displayed in [Output 18.2.1](#) and [Output 18.2.2](#), respectively.

```
data new;
  set travel;
```



```

retain id 0;
id+1;
/*-- create auto variable --*/
decision = (upcase(mode) = 'AUTO');
ttime = auto;
autodum = 1;
trandum = 0;
output;
/*-- create transit variable --*/
decision = (upcase(mode) = 'TRANSIT');
ttime = transit;
autodum = 0;
trandum = 1;
output;
run;
proc print data=new(obs=10);
  var decision autodum trandum ttime;
  id id;
run;

```

Output 18.2.1 Converted Data

	id	decision	autodum	trandum	ttime
	1	0	1	0	52.9
	1	1	0	1	4.4
	2	0	1	0	4.1
	2	1	0	1	28.5
	3	1	1	0	4.1
	3	0	0	1	86.9
	4	0	1	0	56.2
	4	1	0	1	31.6
	5	0	1	0	51.8
	5	1	0	1	20.2

The following statements perform the binary logit estimation:

```

proc mdc data=new;
  model decision = autodum ttime /
    type=clogit
    nchoice=2;
  id id;
run;

```

Output 18.2.2 Binary Logit Estimation of Modal Choice Data

The MDC Procedure					
Conditional Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
autodum	1	-0.2376	0.7505	-0.32	0.7516
ttime	1	-0.0531	0.0206	-2.57	0.0101

In order to handle more general cases, you can use the MDCDATA statement. Choice-specific dummy variables are generated and multiple observations for each individual are created. The following example converts the original data set `travel` by using the MDCDATA statement and performs conditional logit analysis. Interleaved data are output into the new data set `new3`. This data set has twice as many observations as the original `travel` data set.

```
proc mdc data=travel;
  mdcdata varlist( x1 = (auto transit) )
    select=mode
    id=id
    alt=alternative
    decvar=Decision / out=new3;
  model decision = auto x1 /
    nchoice=2
    type=clogit;
  id id;
run;
```

The first nine observations of the modified data set are shown in [Output 18.2.3](#). The result of the preceding program is listed in [Output 18.2.4](#).

Output 18.2.3 Transformed Model Choice Data

Obs	MODE	AUTO	TRANSIT	X1	ID	ALTERNATIVE	DECISION
1	TRANSIT	1	0	52.9	1	1	0
2	TRANSIT	0	1	4.4	1	2	1
3	TRANSIT	1	0	4.1	2	1	0
4	TRANSIT	0	1	28.5	2	2	1
5	AUTO	1	0	4.1	3	1	1
6	AUTO	0	1	86.9	3	2	0
7	TRANSIT	1	0	56.2	4	1	0
8	TRANSIT	0	1	31.6	4	2	1
9	TRANSIT	1	0	51.8	5	1	0

Output 18.2.4 Results Using MDCDATA Statement

The MDC Procedure					
Conditional Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
AUTO	1	-0.2376	0.7505	-0.32	0.7516
X1	1	-0.0531	0.0206	-2.57	0.0101

Example 18.3: Correlated Choice Modeling

Often, it is not realistic to assume that the random components of utility for all choices are independent. This example shows the solution to the problem of correlated random components by using multinomial probit and nested logit.

To analyze correlated data, trinomial choice data (1,000 observations) are created using a pseudo-random number generator by using the following statements. The random utility function is

$$U_{ij} = V_{ij} + \epsilon_{ij}, \quad j = 1, 2, 3$$

where

$$\epsilon_{ij} \sim N \left(0, \begin{bmatrix} 2 & .6 & 0 \\ .6 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \right)$$

```

/*-- generate simulated series --*/
%let ndim = 3;
%let nobs = 1000;

data trichoice;
  array error{&ndim} e1-e3;
  array vtemp{&ndim} _temporary_;
  array lm{6} _temporary_ (1.4142136 0.4242641 0.9055385 0 0 1);
  retain nseed 345678;

  do id = 1 to &nobs;
    index = 0;
    /* generate independent normal variate */
    do i = 1 to &ndim;
      /* index of diagonal element */
      vtemp{i} = rannor(nseed);
    end;
    /* get multivariate normal variate */
    index = 0;

```

```

do i = 1 to &ndim;
  error{i} = 0;
  do j = 1 to i;
    error{i} = error{i} + lm{index+j}*vtemp{j};
  end;
  index = index + i;
end;
x1 = 1.0 + 2.0 * ranuni(nseed);
x2 = 1.2 + 2.0 * ranuni(nseed);
x3 = 1.5 + 1.2 * ranuni(nseed);
util1 = 2.0 * x1 + e1;
util2 = 2.0 * x2 + e2;
util3 = 2.0 * x3 + e3;
do i = 1 to &ndim;
  vtemp{i} = 0;
end;
if ( util1 > util2 & util1 > util3 ) then
  vtemp{1} = 1;
else if ( util2 > util1 & util2 > util3 ) then
  vtemp{2} = 1;
else if ( util3 > util1 & util3 > util2 ) then
  vtemp{3} = 1;
else continue;
/*-- first choice --*/
x = x1;
mode = 1;
decision = vtemp{1};
output;
/*-- second choice --*/
x = x2;
mode = 2;
decision = vtemp{2};
output;
/*-- third choice --*/
x = x3;
mode = 3;
decision = vtemp{3};
output;
end;
run;

```

First, the multinomial probit model is estimated (see the following statements). Results show that the standard deviation, correlation, and slope estimates are close to the parameter values. Note that $\rho_{12} = \frac{\sigma_{12}}{\sqrt{(\sigma_1^2)(\sigma_2^2)}} = \frac{0.6}{\sqrt{(2)(1)}} = 0.42$, $\sigma_1 = \sqrt{2} = 1.41$, $\sigma_2 = \sqrt{1} = 1$, and the parameter value for the variable x is 2.0. (See [Output 18.3.1](#).)

```

/*-- Trinomial Probit --*/
proc mdc data=trichoice randnum=halton nsimul=100;
  model decision = x /
    type=mprobit
    choice=(mode 1 2 3)
    covest=op
    optmethod=qn;

```

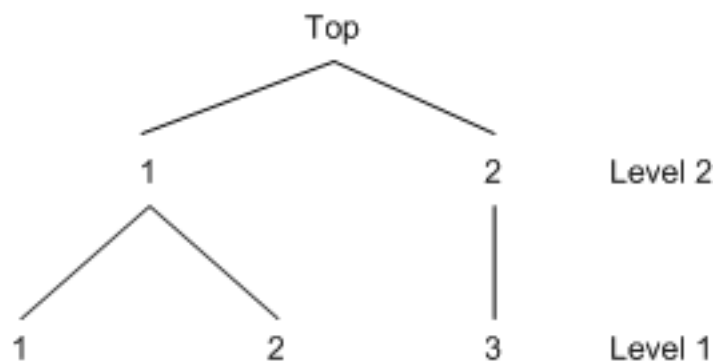
```
id id;
run;
```

Output 18.3.1 Trinomial Probit Model Estimation

The MDC Procedure					
Multinomial Probit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
x	1	1.7987	0.1202	14.97	<.0001
STD_1	1	1.2824	0.1468	8.74	<.0001
RHO_21	1	0.4233	0.1041	4.06	<.0001

Figure 18.29 shows a two-level decision tree.

Figure 18.29 Nested Tree Structure



The following statements estimate the nested model shown in [Figure 18.29](#):

```

/*-- Two-Level Nested Logit --*/
proc mdc data=trichoice;
    model decision = x /
        type=nlogit
        choice=(mode 1 2 3)
        covest=op
        optmethod=qn;
    id id;
    utility u(1,) = x;
    nest level(1) = (1 2 @ 1, 3 @ 2),
        level(2) = (1 2 @ 1);
run;

```

The estimated result (see [Output 18.3.2](#)) shows that the data support the nested tree model since the estimates of the inclusive value parameters are significant and are less than 1.

Output 18.3.2 Two-Level Nested Logit

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
x_L1	1	2.6672	0.1978	13.48	<.0001
INC_L2G1C1	1	0.7911	0.0832	9.51	<.0001
INC_L2G1C2	1	0.7965	0.0921	8.65	<.0001

Example 18.4: Testing for Homoscedasticity of the Utility Function

The conditional logit model imposes equal variances on random components of utility of all alternatives. This assumption can often be too restrictive and the calculated results misleading. This example shows several approaches to testing the homoscedasticity assumption.

The section “[Getting Started: MDC Procedure](#)” on page 945 analyzes an HEV model by using Daganzo’s trinomial choice data and displays the HEV parameter estimates in [Figure 18.15](#). The inverted scale estimates for mode “2” and mode “3” suggest that the conditional logit model (which imposes equal variances on random components of utility of all alternatives) might be misleading. The HEV estimation summary from that analysis is repeated in [Output 18.4.1](#).

Output 18.4.1 HEV Estimation Summary ($\theta_1 = 1$)

Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.41383
Maximum Absolute Gradient	0.0000218
Number of Iterations	11
Optimization Method	Dual Quasi-Newton
AIC	72.82765
Schwarz Criterion	78.56372

You can estimate the HEV model with unit scale restrictions on all three alternatives ($\theta_1 = \theta_2 = \theta_3 = 1$) with the following statements.

```

/*-- HEV Estimation --*/
proc mdc data=newdata;
  model decision = ttime /
    type=hev
    nchoice=3
    hev=(unitscale=1 2 3, integrate=laguerre)
    covest=hess;
  id pid;
run;

```

Output 18.4.2 displays the estimation summary.

Output 18.4.2 HEV Estimation Summary ($\theta_1 = \theta_2 = \theta_3 = 1$)

The MDC Procedure	
Heteroscedastic Extreme Value Model Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-34.12756
Maximum Absolute Gradient	6.7951E-9
Number of Iterations	5
Optimization Method	Dual Quasi-Newton
AIC	70.25512
Schwarz Criterion	72.16714

The test for scale equivalence (SCALE2=SCALE3=1) is performed using a likelihood ratio test statistic. The following SAS statements compute the test statistic (1.4276) and its p -value (0.4898) from the log-likelihood values in [Output 18.4.1](#) and [Output 18.4.2](#):

```

data _null_;
  /*-- test for H0: scale2 = scale3 = 1 --*/
  /* ln L(max) = -34.1276 */
  /* ln L(0) = -33.4138 */
  stat = -2 * ( - 34.1276 + 33.4138 );
  df = 2;
  p_value = 1 - probchi(stat, df);
  put stat= p_value=;
run;

```

The test statistic fails to reject the null hypothesis of equal scale parameters, which implies that the random utility function is homoscedastic.

A multinomial probit model also allows heteroscedasticity of the random components of utility for different alternatives. Consider the utility function

$$U_{ij} = V_{ij} + \epsilon_{ij}$$

where

$$\epsilon_i \sim N \left(\mathbf{0}, \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & \sigma_3^2 \end{bmatrix} \right)$$

This multinomial probit model is estimated by using the following statements:

```

/*-- Heteroscedastic Multinomial Probit --*/
proc mdc data=newdata;
  model decision = ttime /
    type=mprobit
    nchoice=3
    unitvariance=(1 2)
    covest=hess;
  id pid;
  restrict RHO_31 = 0;
run;

```

The estimation summary is displayed in [Output 18.4.3](#).

Output 18.4.3 Heteroscedastic Multinomial Probit Estimation Summary

The MDC Procedure	
Multinomial Probit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-33.88604
Log Likelihood Null (LogL(0))	-54.93061
Maximum Absolute Gradient	5.60277E-6
Number of Iterations	8
Optimization Method	Dual Quasi-Newton
AIC	71.77209
Schwarz Criterion	75.59613
Number of Simulations	100
Starting Point of Halton Sequence	11

Next, the multinomial probit model with unit variances ($\sigma_1 = \sigma_2 = \sigma_3 = 1$) is estimated in the following statements:

```

/*-- Homoscedastic Multinomial Probit --*/
proc mdc data=newdata;
  model decision = ttime /
    type=mprobit
    nchoice=3
    unitvariance=(1 2 3)
    covest=hess;

  id pid;
  restrict RHO_21 = 0;
run;

```

The estimation summary is displayed in [Output 18.4.4](#).

Output 18.4.4 Homoscedastic Multinomial Probit Estimation Summary

The MDC Procedure	
Multinomial Probit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	50
Number of Cases	150
Log Likelihood	-34.54252
Log Likelihood Null (LogL(0))	-54.93061
Maximum Absolute Gradient	1.37303E-7
Number of Iterations	5
Optimization Method	Dual Quasi-Newton
AIC	71.08505
Schwarz Criterion	72.99707
Number of Simulations	100
Starting Point of Halton Sequence	11

The test for homoscedasticity ($\sigma_3 = 1$) under $\sigma_1 = \sigma_2 = 1$ shows that the error variance is not heteroscedastic since the test statistic (1.313) is less than $\chi^2_{0.05,1} = 3.84$. The marginal probability or p -value computed in the following statements from the PROBCHI function is 0.2519:

```
data _null_;
  /*-- test for H0: sigma3 = 1 --*/
  /*   ln L(max) = -33.8860      */
  /*   ln L(0)   = -34.5425     */
  stat = -2 * ( -34.5425 + 33.8860 );
  df = 1;
  p_value = 1 - probchi(stat, df);
  put stat= p_value=;
run;
```

Example 18.5: Choice of Time for Work Trips: Nested Logit Analysis

This example uses sample data of 527 automobile commuters in the San Francisco Bay Area to demonstrate the use of nested logit model.

Brownstone and Small (1989) analyzed a two-level nested logit model that is displayed in Figure 18.30. The probability of choosing j at level 2 is written as

$$P_i(j) = \frac{\exp(\tau_j I_j)}{\sum_{j'=1}^3 \exp(\tau_{j'} I_{j'})}$$

where $I_{j'}$ is an inclusive value and is computed as

$$I_{j'} = \ln \left[\sum_{k' \in C_{j'}} \exp(\mathbf{x}'_{ik'} \boldsymbol{\beta}) \right]$$

The probability of choosing an alternative k is denoted as

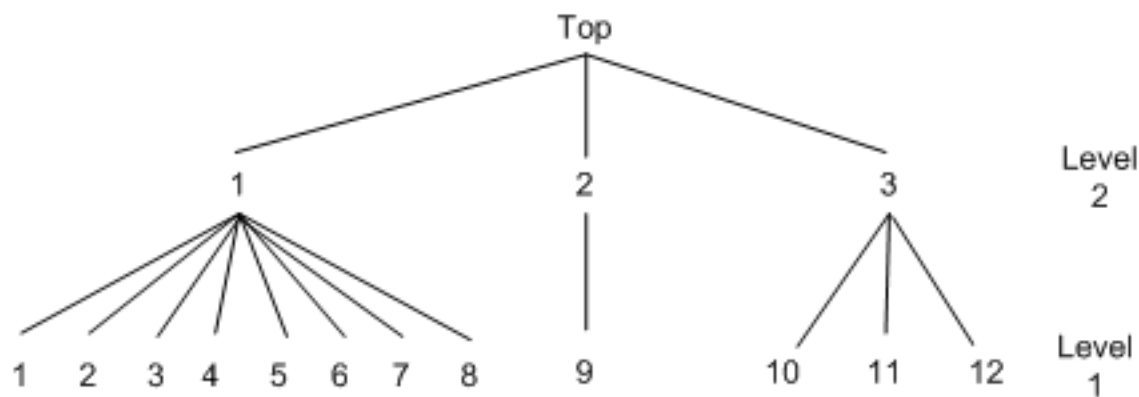
$$P_i(k|j) = \frac{\exp(\mathbf{x}'_{ik}\boldsymbol{\beta})}{\sum_{k' \in C_j} \exp(\mathbf{x}'_{ik'}\boldsymbol{\beta})}$$

The full information maximum likelihood (FIML) method maximizes the following log-likelihood function:

$$\mathcal{L} = \sum_{i=1}^N \sum_{j=1}^J d_{ij} [\ln(P_i(k|j)) + \ln(P_i(j))]$$

where $d_{ij} = 1$ if a decision maker i chooses j , and 0 otherwise.

Figure 18.30 Decision Tree for Two-Level Nested Logit



Sample data of 527 automobile commuters in the San Francisco Bay Area have been analyzed by Small (1982) and Brownstone and Small (1989). The regular time of arrival is recorded as between 42.5 minutes early and 17.5 minutes late, and indexed by 12 alternatives, using five-minute interval groups. Refer to Small (1982) for more details on these data.

The following statements estimate the two-level nested logit model:

```

/*-- Two-level Nested Logit --*/
proc mdc data=small maxit=200 outest=a;
  model decision = r15 r10 ttime ttime_cp sde sde_cp
                 sdl sdx d21 /
    type=nlogit
    choice=(alt);
  id id;
  utility u(1, ) = r15 r10 ttime ttime_cp sde sde_cp
                 sdl sdx d21;
  nest level(1) = (1 2 3 4 5 6 7 8 @ 1, 9 @ 2, 10 11 12 @ 3),
    level(2) = (1 2 3 @ 1);
run;

```

The estimation summary, discrete response profile, and the FIML estimates are displayed in [Output 18.5.1](#) through [Output 18.5.3](#).

Output 18.5.1 Nested Logit Estimation Summary

The MDC Procedure	
Nested Logit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	527
Number of Cases	6324
Log Likelihood	-990.81912
Log Likelihood Null (LogL(0))	-1310
Maximum Absolute Gradient	4.93868E-6
Number of Iterations	18
Optimization Method	Newton-Raphson
AIC	2006
Schwarz Criterion	2057

Output 18.5.2 Discrete Choice Characteristics

Discrete Response Profile			
Index	alt	Frequency	Percent
0	1	6	1.14
1	2	10	1.90
2	3	61	11.57
3	4	15	2.85
4	5	27	5.12
5	6	80	15.18
6	7	55	10.44
7	8	64	12.14
8	9	187	35.48
9	10	13	2.47
10	11	8	1.52
11	12	1	0.19

Output 18.5.3 Nested Logit Estimates

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
r15_L1	1	1.1034	0.1221	9.04	<.0001
r10_L1	1	0.3931	0.1194	3.29	0.0010
ttime_L1	1	-0.0465	0.0235	-1.98	0.0474
ttime_cp_L1	1	-0.0498	0.0305	-1.63	0.1028
sde_L1	1	-0.6618	0.0833	-7.95	<.0001
sde_cp_L1	1	0.0519	0.1278	0.41	0.6850
sdl_L1	1	-2.1006	0.5062	-4.15	<.0001
sdlx_L1	1	-3.5240	1.5346	-2.30	0.0217
d2l_L1	1	-1.0941	0.3273	-3.34	0.0008
INC_L2G1C1	1	0.6762	0.2754	2.46	0.0141
INC_L2G1C2	1	1.0906	0.3090	3.53	0.0004
INC_L2G1C3	1	0.7622	0.1649	4.62	<.0001

Now policy makers are particularly interested in predicting shares of each alternative to be chosen by population. One application of such predictions are market shares. Going even further, it is extremely useful to predict choice probabilities out of sample; that is, under alternative policies.

Suppose that in this particular transportation example you are interested in projecting the effect of a new program that indirectly shifts individual preferences with respect to late arrival to work. This means that you manage to decrease the coefficient for the “late dummy” D2L, which is a penalty for violating some margin of arriving on time. Suppose that you alter it from an estimated -1.0941 to almost twice that level, -2.0941 .

But first, in order to have a benchmark share, you predict probabilities to choose each particular option and output them to the new data set with the following additional statement:

```
/*-- Create new data set with predicted probabilities --*/
output out=predicted1 p=probs;
```

Having these in sample predictions, you sort the data by alternative and aggregate across each of them as shown in the following statements:

```
/*-- Sort the data by alternative --*/
proc sort data=predicted1;
  by alt;
run;

/*-- Calculate average probabilities of each alternative --*/
proc means data=predicted1 noobs mean;
  var probs;
  class alt;
run;
```

Output 18.5.4 shows the summary table that is produced by the preceding statements.

Output 18.5.4 Average Probabilities of Choosing Each Particular Alternative

The MEANS Procedure	
Analysis Variable : probs	
alt	Mean
1	0.0178197
2	0.0161712
3	0.0972584
4	0.0294659
5	0.0594076
6	0.1653871
7	0.1118181
8	0.1043445
9	0.3564940
10	0.0272324
11	0.0096334
12	0.0049677

Now you change the preference parameter for variable D2L. In order to fix all the parameters, you use the MAXIT=0 option to prevent optimization and the START= option in MODEL statement to specify initial parameters.

```

/*-- Two-level Nested Logit --*/
proc mdc data=small maxit=0 outest=a;
  model decision = r15 r10 ttime ttime_cp sde sde_cp
                 sdl sdlx d2l /
    type=nlogit
    choice=(alt)
    start=( 1.1034 0.3931 -0.0465 -0.0498
            -0.6618 0.0519 -2.1006 -3.5240
            -2.0941 0.6762 1.0906 0.7622);

  id id;
  utility u(1, ) = r15 r10 ttime ttime_cp sde sde_cp
                  sdl sdlx d2l;
  nest level(1) = (1 2 3 4 5 6 7 8 @ 1, 9 @ 2, 10 11 12 @ 3),
    level(2) = (1 2 3 @ 1);
  output out=predicted2 p=probs;
run;

```

You apply the same SORT and MEANS procedures as applied earlier to obtain the following summary table in [Output 18.5.5](#).

Output 18.5.5 Average Probabilities of Choosing Each Particular Alternative after Changing the Preference Parameter

The MEANS Procedure	
Analysis Variable : probs	
alt	Mean
1	0.0207766
2	0.0188966
3	0.1138816
4	0.0345654
5	0.0697830
6	0.1944572
7	0.1315588
8	0.1228049
9	0.2560674
10	0.0236178
11	0.0090781
12	0.0045128

Comparing the two tables shown in [Output 18.5.4](#) and [Output 18.5.5](#), you clearly see the effect of increased dislike of late arrival. People shifted their choices towards earlier times (alternatives 1–8) from the on-time option (alternative 9).

Brownstone and Small (1989) also estimate the two-level nested logit model with equal scale parameter constraints, $\tau_1 = \tau_2 = \tau_3$. Replication of their model estimation is shown in the following statements:

```

/*-- Nested Logit with Equal Dissimilarity Parameters ---*/
proc mdc data=small maxit=200 outest=a;
  model decision = r15 r10 ttime ttime_cp sde sde_cp
                 sdl sdlx d2l /
    samescale
    type=nlogit
    choice=(alt);
  id id;
  utility u(1, ) = r15 r10 ttime ttime_cp sde sde_cp
                 sdl sdlx d2l;

```

```

nest level(1) = (1 2 3 4 5 6 7 8 @ 1, 9 @ 2, 10 11 12 @ 3),
      level(2) = (1 2 3 @ 1);
run;

```

The parameter estimates and standard errors are almost identical to those in Brownstone and Small (1989, p. 69). [Output 18.5.6](#) and [Output 18.5.7](#) display the results.

Output 18.5.6 Nested Logit Estimation Summary with Equal Dissimilarity Parameters

The MDC Procedure	
Nested Logit Estimates	
Model Fit Summary	
Dependent Variable	decision
Number of Observations	527
Number of Cases	6324
Log Likelihood	-994.39402
Log Likelihood Null (LogL(0))	-1310
Maximum Absolute Gradient	2.97172E-6
Number of Iterations	16
Optimization Method	Newton-Raphson
AIC	2009
Schwarz Criterion	2051

Output 18.5.7 Nested Logit Estimates with Equal Dissimilarity Parameters

The MDC Procedure					
Nested Logit Estimates					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
r15_L1	1	1.1345	0.1092	10.39	<.0001
r10_L1	1	0.4194	0.1081	3.88	0.0001
ttime_L1	1	-0.1626	0.0609	-2.67	0.0076
ttime_cp_L1	1	0.1285	0.0853	1.51	0.1319
sde_L1	1	-0.7548	0.0669	-11.28	<.0001
sde_cp_L1	1	0.2292	0.0981	2.34	0.0195
sdl_L1	1	-2.0719	0.4860	-4.26	<.0001
sdlx_L1	1	-2.8216	1.2560	-2.25	0.0247
d2l_L1	1	-1.3164	0.3474	-3.79	0.0002
INC_L2G1	1	0.8059	0.1705	4.73	<.0001

However, the test statistic for $H_0 : \tau_1 = \tau_2 = \tau_3$ rejects the null hypothesis at the 5% significance level since $-2 * (\ln L(0) - \ln L) = 7.15 > \chi^2_{0.05,2} = 5.99$. The p -value is computed in the following statements and is equal to 0.0280:

```
data _null_;
```



```

/*-- test for H0: tau1 = tau2 = tau3 --*/
/*   ln L(max) = -990.8191          */
/*   ln L(0)   = -994.3940          */
stat = -2 * ( -994.3940 + 990.8191 );
df = 2;
p_value = 1 - probchi(stat, df);
put stat= p_value=;
run;

```

Example 18.6: Hausman's Specification Test

As discussed under multinomial and conditional logits, the odds ratios in the multinomial or conditional logits are independent of the other alternatives. See the section “[Multinomial Logit and Conditional Logit](#)” on page 980. This property of the logit models is often viewed as rather restrictive and provides substitution patterns that do not represent the actual relationship among choice alternatives.

This independence assumption, called independence of irrelevant alternatives (IIA), can be tested with Hausman's specification test. According to Hausman and McFadden (1984), if a subset of choice alternatives is irrelevant, it can be omitted from the sample without changing the remaining parameters systematically.

Under the null hypothesis (IIA holds), omitting the irrelevant alternatives leads to consistent and efficient parameter estimates β_R , while parameter estimates β_U from the unrestricted model are consistent but inefficient. Under the alternative, only the parameter estimates β_U obtained from the unrestricted model are consistent.

This example demonstrates the use of Hausman's specification test to analyze the IIA assumption and decide on an appropriate model that provides less restrictive substitution patterns (nested logit or multinomial probit). A sample data set of 527 automobile commuters in the San Francisco Bay Area is used (Small 1982). The regular time of arrival is recorded as between 42.5 minutes early and 17.5 minutes late, and is indexed by 12 alternatives, using five-minute interval groups. See Small (1982) for more details about these data.

The data can be divided into three groups: commuters who arrive early (alternatives 1 – 8), commuters who arrive on time (alternative 9), and commuters who arrive late (alternatives 10 – 12). Suppose that you want to test whether the IIA assumption holds for commuters who arrived on time (alternative 9).

Hausman's specification test is distributed as χ^2 with k degrees of freedom (equal to the number of independent variables) and can be written as

$$\chi^2 = (\hat{\beta}_U - \hat{\beta}_R)'[\hat{V}_U - \hat{V}_R]^{-1}(\hat{\beta}_U - \hat{\beta}_R)$$

where $\hat{\beta}_R$ and \hat{V}_R represent parameter estimates and the variance-covariance matrix, respectively, from the model where the ninth alternative was omitted, and $\hat{\beta}_U$ and \hat{V}_U represent parameter estimates and the variance-covariance matrix, respectively, from the full model. The following macro can be used to perform the IIA test for the ninth alternative:

```

/*-----
* name: %IIA
* note: This macro test the IIA hypothesis using the Hausman's
*       specification test. Inputs into the macro are as follows:
*       indata:    input data set
*       varlist:   list of RHS variables
*       nchoice:   number of choices for each individual
*       choice:    list of choices
*       nvar:      number of dependent variables
*       nIIA:      number of choice alternatives used to test IIA
*       IIA:       choice alternatives used to test IIA
*       id:        ID variable
*       decision:  0-1 LHS variable representing nchoice choices
* purpose: Hausman's specification test
*-----*/

%macro IIA(indata=, varlist=, nchoice=, choice= , nvar= , IIA= ,
          nIIA=, id= , decision=);

  %let n=%eval(&nchoice-&nIIA);

  proc mdc data=&indata outest=cov covout ;
    model &decision = &varlist /
          type=clogit
          nchoice=&nchoice;

    id &id;
    run;

  data two;
    set &indata;
    if &choice in &IIA and &decision=1 then output;
  run;

  data two;
    set two;
    keep &id ind;
    ind=1;
  run;

  data merged;
    merge &indata two;
    by &id;
    if ind=1 or &choice in &IIA then delete;
  run;

  proc mdc data=merged outest=cov2 covout ;
    model &decision = &varlist /
          type=clogit
          nchoice=&n;

    id &id;
    run;

proc IML;

```

```

use cov var{ _TYPE_ &varlist };
    read first into BetaU;
    read all into CovVarU where( _TYPE_='COV' );
close cov;

use cov2 var{ _TYPE_ &varlist };
    read first into BetaR;
    read all into CovVarR where( _TYPE_='COV' );
close cov;

tmp = BetaU-BetaR;
ChiSq=tmp*ginv(CovVarR-CovVarU)*tmp`;
if ChiSq<0 then ChiSq=0;
Prob=1-Probchi(ChiSq, &nvar);
Print "Hausman Test for IIA for Variable &IIA";
Print ChiSq Prob;
run; quit;

%mend IIA;

```

The following statement invokes the %IIA macro to test IIA for commuters who arrive on time:

```

%IIA( indata=small,
      varlist=r15 r10 ttime ttime_cp sde sde_cp sdl sdlx d21,
      nchoice=12,
      choice=alt,
      nvar=9,
      nIIA=1,
      IIA=(9),
      id=id,
      decision=decision );

```

The obtained χ^2 of 7.9 and the p -value of 0.54 indicate that IIA holds for commuters who arrive on time (alternative 9). If the IIA assumption did not hold, the following model (nested logit), which reserves a subcategory for alternative 9, might be more appropriate. See [Output 18.30](#).

```

proc mdc data=small maxit=200 outest=a;
    model decision = r15 r10 ttime ttime_cp sde sde_cp
                    sdl sdlx d21 /
            type=nlogit
            choice=(alt);
    id id;
    utility u(1, ) = r15 r10 ttime ttime_cp sde sde_cp
                    sdl sdlx d21;
    nest level(1) = (1 2 3 4 5 6 7 8 @ 1, 9 @ 2, 10 11 12 @ 3),
        level(2) = (1 2 3 @ 1);
run;

```

Similarly, IIA could be tested for commuters who arrive approximately on time (alternative 8, 9, 10), as follows:

```

%IIA( indata=small,
      varlist=r15 r10 ttime ttime_cp sde sde_cp sdl sdlx d21,
      nchoice=12,

```

```

choice=alt,
nvar=9,
nIIA=3,
IIA=(8 9 10),
id=id,
decision=decision );

```

Based on this test, independence of irrelevant alternatives is not rejected for this subgroup ($\chi^2 = 10.3$ and $p\text{-value}=0.326$), and it is concluded that a more complex nested logit model with commuters who arrive approximately on time in one subcategory is not needed. Since the two Hausman's specification tests just performed did not reject IIA, it might be a good idea to test whether the nested logit model is even needed. This is done using the likelihood ratio test in the next example.

Example 18.7: Likelihood Ratio Test

This example is an extension of [Example 18.6](#); it performs another specification test, the likelihood ratio test (LR). Suppose you are interested in testing whether the nested logit model ([Output 18.30](#)) with three subgroups that represent commuters who arrive early, on time, and late is more appropriate than the standard multinomial logit. This can be done by adding the TEST statement to the model as follows:

```

/*-- Restricted Model with Inclusive Value Parameters
   Constrained to One --*/
proc mdc data=small maxit=200 outest=a;
  model decision = r15 r10 ttime ttime_cp sde sde_cp
                  sdl sdlx d2l /
    type=nlogit
    choice=(alt);
  id id;
  utility u(1, ) = r15 r10 ttime ttime_cp sde sde_cp
                  sdl sdlx d2l;
  nest level(1) = (1 2 3 4 5 6 7 8 @ 1, 9 @ 2, 10 11 12 @ 3),
    level(2) = (1 2 3 @ 1);
  test INC_L2G1C1=1, INC_L2G1C2=1, INC_L2G1C3=1 /LR;
run;

```

Output 18.7.1 Likelihood Ratio Test

The MDC Procedure				
Nested Logit Estimates				
Test Results				
Test	Type	Statistic	Pr > ChiSq	Label
Test0	L.R.	8.11	0.0438	INC_L2G1C1 = 1 , INC_L2G1C2 = 1 , INC_L2G1C3 = 1

Based on this test, you can conclude that the inclusive values, INC_L2G1C1, INC_L2G1C2, and INC_L2G1C3 are jointly statistically different from the value 1 at the 5% level and therefore the nested logit is a more appropriate model. The LR test can be used to test other types of restrictions in the nested logit setting as long as one model can be nested within another.

Acknowledgments: MDC Procedure

Professor Kenneth Small provided the work trip data that are used in the “Examples” section. These data were collected for the urban travel demand forecasting project, which was carried out by McFadden, Talvitie, and associates (1977). The project was supported by the National Science Foundation, Research Applied to National Needs Program through grants GI-43740 and APR74-20392, and the Alfred P. Sloan Foundation, through grant 74-21-8.

References

- Abramowitz, M. and Stegun, A. (1970), *Handbook of Mathematical Functions*, New York: Dover Press.
- Amemiya, T. (1981), “Qualitative Response Models: A Survey,” *Journal of Economic Literature*, 19, 483–536.
- Amemiya, T. (1985), *Advanced Econometrics*, Cambridge: Harvard University Press.
- Ben-Akiva, M. and Lerman, S. R. (1985), *Discrete Choice Analysis*, Cambridge: MIT Press.
- Bhat, C. R. (1995), “A Heteroscedastic Extreme Value Model of Intercity Travel Mode Choice,” *Transportation Research*, 29, 471–483.
- Brownstone, D. and Small, K. A. (1989), “Efficient Estimation of Nested Logit Models,” *Journal of Business and Statistics*, 7, 67–74.
- Brownstone, D. and Train, K. (1999), “Forecasting New Product Penetration with Flexible Substitution Patterns,” *Journal of Econometrics*, 89, 109–129.
- Daganzo, C. (1979), *Multinomial Probit: The Theory and Its Application to Demand Forecasting*, New York: Academic Press.
- Daganzo, C. and Kusnic, M. (1993), “Two Properties of the Nested Logit Model,” *Transportation Science*, 27, 395–400.
- Estrella, A. (1998), “A New Measure of Fit for Equations with Dichotomous Dependent Variables,” *Journal of Business and Economic Statistics*, 16, 198–205.
- Gallant, A. R. (1987), *Nonlinear Statistical Models*, New York: Wiley.

- Geweke, J. (1989), "Bayesian Inference in Econometric Models Using Monte Carlo Integration," *Econometrica*, 57, 1317–1340.
- Geweke, J., Keane, M., and Runkle, D. (1994), "Alternative Computational Approaches to Inference in the Multinomial Probit Model," *Review of Economics and Statistics*, 76, 609–632.
- Godfrey, L. G. (1988), *Misspecification Tests in Econometrics*, Cambridge: Cambridge University Press.
- Green, W. H. (1997), *Econometric Analysis*, Upper Saddle River, NJ: Prentice Hall.
- Gregory, A. W. and Veall, M. R. (1985), "On Formulating Wald Tests for Nonlinear Restrictions," *Econometrica*, 53, 1465–1468.
- Hajivassiliou, V. A. (1993), "Simulation Estimation Methods for Limited Dependent Variable Models," in *Handbook of Statistics*, vol. 11, ed. G. S. Maddala, C. R. Rao, and H. D. Vinod, New York: Elsevier Science Publishing.
- Hajivassiliou, V., McFadden, D., and Ruud, P. (1996), "Simulation of Multivariate Normal Rectangle Probabilities and Their Derivatives: Theoretical and Computational Results," *Journal of Econometrics*, 72, 85–134.
- Hausman, J. and McFadden, D. (1984), "Specification Tests for the Multinomial Logit Model," *Econometrica*, 52(5), 1219–40.
- Hensher, D. A. (1986), "Sequential and Full Information Maximum Likelihood Estimation of a Nested Logit Model," *Review of Economics and Statistics*, 68, 657–667.
- Hensher, D. A. (1993), "Using Stated Response Choice Data to Enrich Revealed Preference Discrete Choice Models," *Marketing Letters*, 4, 139–151.
- Keane, M. P. (1994), "A Computationally Practical Simulation Estimator for Panel Data," *Econometrica*, 62, 95–116.
- Keane, M. P. (1997), "Current Issues in Discrete Choice Modeling," *Marketing Letters*, 8, 307–322.
- LaMotte, L. R. (1994), "A Note on the Role of Independence in t Statistics Constructed from Linear Statistics in Regression Models," *The American Statistician*, 48, 238–240.
- Luce, R. D. (1959), *Individual Choice Behavior: A Theoretical Analysis*, New York: Wiley.
- Maddala, G. S. (1983), *Limited Dependent and Qualitative Variables in Econometrics*, Cambridge: Cambridge University Press.
- McFadden, D. (1974), "Conditional Logit Analysis of Qualitative Choice Behavior," in *Frontiers in Econometrics*, ed. P. Zarembka, New York: Academic Press.
- McFadden, D. (1978), "Modelling the Choice of Residential Location," in *Spatial Interaction Theory and Planning Models*, ed. A. Karlqvist, L. Lundqvist, F. Snickars, and J. Weibull, Amsterdam: North Holland.
- McFadden, D. (1981), "Econometric Models of Probabilistic Choice," in *Structural Analysis of Discrete Data with Econometric Applications*, ed. C.F. Manski and D. McFadden, Cambridge: MIT Press.

- McFadden, D. and Ruud, P. A. (1994), "Estimation by Simulation," *Review of Economics and Statistics*, 76, 591–608.
- McFadden, D., Talvitie, A. P., and associates (1977), *The Urban Travel Demand Forecasting Project: Phase I Final Report Series*, vol. 5, The Institute of Transportation Studies, University of California, Berkeley.
- Phillips, C. B. and Park, J. Y. (1988), "On Formulating Wald Tests of Nonlinear Restrictions," *Econometrica*, 56, 1065–1083.
- Powers, D. A. and Xie, Y. (2000), *Statistical Methods for Categorical Data Analysis*, San Diego: Academic Press.
- Schmidt, P. and Strauss, R. (1975), "The Prediction of Occupation Using Multiple Logit Models," *International Economic Review*, 16, 471–486.
- Small, K. (1982), "The Scheduling of Consumer Activities: Work Trips," *American Economic Review*, 72, 467–479.
- Spector, L. and Mazzeo, M. (1980), "Probit Analysis and Economic Education," *Journal of Economic Education*, 11, 37–44.
- Swait, J. and Bernardino, A. (2000), "Distinguishing Taste Variation from Error Structure in Discrete Choice Data," *Transportation Research Part B*, 34, 1–15.
- Theil, H. (1969), "A Multinomial Extension of the Linear Logit Model," *International Economic Review*, 10, 251–259.
- Train, K. E., Ben-Akiva, M., and Atherton, T. (1989), "Consumption Patterns and Self-Selecting Tariffs," *Review of Economics and Statistics*, 71, 62–73.

Chapter 19

The MODEL Procedure

Contents

Overview: MODEL Procedure	1025
Getting Started: MODEL Procedure	1029
Nonlinear Regression Analysis	1029
Nonlinear Systems Regression	1033
General Form Models	1034
Solving Simultaneous Nonlinear Equation Systems	1036
Monte Carlo Simulation	1039
Syntax: MODEL Procedure	1042
Functional Summary	1044
PROC MODEL Statement	1050
BOUNDS Statement	1054
BY Statement	1056
CONTROL Statement	1059
DELETEMODEL Statement	1059
ENDOGENOUS Statement	1059
ERRORMODEL Statement	1060
ESTIMATE Statement	1061
EXOGENOUS Statement	1063
FIT Statement	1063
ID Statement	1073
INCLUDE Statement	1073
INSTRUMENTS Statement	1073
LABEL Statement	1075
MOMENT Statement	1075
OUTVARS Statement	1077
PARAMETERS Statement	1077
Programming Statements	1077
RANGE Statement	1077
RESET Statement	1078
RESTRICT Statement	1079
SOLVE Statement	1079
TEST Statement	1084
VAR Statement	1086
WEIGHT Statement	1086

Details: Estimation by the MODEL Procedure	1086
Estimation Methods	1086
Properties of the Estimates	1104
Minimization Methods	1106
Convergence Criteria	1107
Troubleshooting Convergence Problems	1109
Iteration History	1120
Computer Resource Requirements	1123
Testing for Normality	1127
Heteroscedasticity	1129
Testing for Autocorrelation	1136
Transformation of Error Terms	1137
Error Covariance Structure Specification	1140
Ordinary Differential Equations	1144
Restrictions and Bounds on Parameters	1154
Tests on Parameters	1156
Hausman Specification Test	1157
Chow Tests	1159
Profile Likelihood Confidence Intervals	1160
Choice of Instruments	1162
Autoregressive Moving-Average Error Processes	1165
Distributed Lag Models and the %PDL Macro	1179
Input Data Sets	1182
Output Data Sets	1187
ODS Table Names	1190
ODS Graphics	1192
Details: Simulation by the MODEL Procedure	1193
Solution Modes	1194
Multivariate t Distribution Simulation	1199
Alternate Distribution Simulation	1201
Mixtures of Distributions—Copulas	1203
Solution Mode Output	1209
Goal Seeking: Solving for Right-Hand-Side Variables	1215
Numerical Solution Methods	1217
Numerical Integration	1223
Limitations	1224
SOLVE Data Sets	1225
Programming Language Overview: MODEL Procedure	1228
Variables in the Model Program	1228
Equation Translations	1232
Derivatives	1234
Mathematical Functions	1235
Functions across Time	1236
Language Differences	1240

Storing Programs in Model Files	1243
Macro Return Codes (SYSINFO)	1245
Diagnostics and Debugging	1245
Analyzing the Structure of Large Models	1250
Examples: MODEL Procedure	1257
Example 19.1: OLS Single Nonlinear Equation	1257
Example 19.2: A Consumer Demand Model	1260
Example 19.3: Vector AR(1) Estimation	1265
Example 19.4: MA(1) Estimation	1269
Example 19.5: Polynomial Distributed Lags by Using %PDL	1273
Example 19.6: General Form Equations	1277
Example 19.7: Spring and Damper Continuous System	1281
Example 19.8: Nonlinear FIML Estimation	1287
Example 19.9: Circuit Estimation	1289
Example 19.10: Systems of Differential Equations	1290
Example 19.11: Monte Carlo Simulation	1294
Example 19.12: Cauchy Distribution Estimation	1295
Example 19.13: Switching Regression Example	1297
Example 19.14: Simulating from a Mixture of Distributions	1301
Example 19.15: Simulated Method of Moments—Simple Linear Regression	1309
Example 19.16: Simulated Method of Moments—AR(1) Process	1311
Example 19.17: Simulated Method of Moments—Stochastic Volatility Model	1313
Example 19.18: Duration Data Model with Unobserved Heterogeneity	1314
Example 19.19: EMM Estimation of a Stochastic Volatility Model	1316
Example 19.20: Illustration of ODS Graphics	1320
References	1330

Overview: MODEL Procedure

The MODEL procedure analyzes models in which the relationships among the variables comprise a system of one or more nonlinear equations. Primary uses of the MODEL procedure are estimation, simulation, and forecasting of nonlinear simultaneous equation models.

PROC MODEL features include the following:

- SAS programming statements to define simultaneous systems of nonlinear equations
- tools to analyze the structure of the simultaneous equation system
- ARIMA, PDL, and other dynamic modeling capabilities
- tools to specify and estimate the error covariance structure

- tools to estimate and solve ordinary differential equations
- the following methods for parameter estimation:
 - ordinary least squares (OLS)
 - two-stage least squares (2SLS)
 - seemingly unrelated regression (SUR) and iterative SUR (ITSUR)
 - three-stage least squares (3SLS) and iterative 3SLS (IT3SLS)
 - generalized method of moments (GMM)
 - simulated method of moments (SMM)
 - full information maximum likelihood (FIML)
 - general log-likelihood maximization
- simulation and forecasting capabilities
- Monte Carlo simulation
- goal-seeking solutions

A system of equations can be nonlinear in the parameters, nonlinear in the observed variables, or nonlinear in both the parameters and the variables. *Nonlinear* in the parameters means that the mathematical relationship between the variables and parameters is not required to have a linear form. (A linear model is a special case of a nonlinear model.) A general nonlinear system of equations can be written as

$$\begin{aligned}
 q_1(y_{1,t}, y_{2,t}, \dots, y_{g,t}, x_{1,t}, x_{2,t}, \dots, x_{m,t}, \theta_1, \theta_2, \dots, \theta_p) &= \epsilon_{1,t} \\
 q_2(y_{1,t}, y_{2,t}, \dots, y_{g,t}, x_{1,t}, x_{2,t}, \dots, x_{m,t}, \theta_1, \theta_2, \dots, \theta_p) &= \epsilon_{2,t} \\
 &\vdots \\
 q_g(y_{1,t}, y_{2,t}, \dots, y_{g,t}, x_{1,t}, x_{2,t}, \dots, x_{m,t}, \theta_1, \theta_2, \dots, \theta_p) &= \epsilon_{g,t}
 \end{aligned}$$

where $y_{i,t}$ is an endogenous variable, $x_{i,t}$ is an exogenous variable, θ_i is a parameter, and ϵ_i is the unknown error. The subscript t represents time or some index to the data.

In econometrics literature, the observed variables are either *endogenous* (dependent) variables or *exogenous* (independent) variables. This system can be written more succinctly in vector form as

$$\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) = \boldsymbol{\epsilon}_t$$

This system of equations is in *general form* because the error term is by itself on one side of the equality. Systems can also be written in *normalized form* by placing the endogenous variable on one side of the equality, with each equation defining a predicted value for a unique endogenous variable. A normalized form equation system can be written in vector notation as

$$\mathbf{y}_t = \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) + \boldsymbol{\epsilon}_t.$$

PROC MODEL handles equations written in both forms.

Econometric models often explain the current values of the endogenous variables as functions of past values of exogenous and endogenous variables. These past values are referred to as *lagged* values, and the variable x_{t-i} is called lag i of the variable x_t . Using lagged variables, you can create a *dynamic*, or time-dependent, model. In the preceding model systems, the lagged exogenous and endogenous variables are included as part of the exogenous variables.

If the data are time series, so that t indexes time (see Chapter 3, “Working with Time Series Data,” for more information on time series), it is possible that ϵ_t depends on ϵ_{t-i} or, more generally, the ϵ_t ’s are not identically and independently distributed. If the errors of a model system are autocorrelated, the standard error of the estimates of the parameters of the system will be inflated.

Sometimes the ϵ_i ’s are not identically distributed because the variance of ϵ is not constant. This is known as *heteroscedasticity*. Heteroscedasticity in an estimated model can also inflate the standard error of the estimates of the parameters. Using a weighted estimation can sometimes eliminate this problem. Alternately, a variance model such as GARCH or EGARCH can be estimated to correct for heteroscedasticity. If the proper weighting scheme and the form of the error model is difficult to determine, generalized methods of moments (GMM) estimation can be used to determine parameter estimates with very few assumptions about the form of the error process.

Other problems can also arise when estimating systems of equations. Consider the following system of equations, which is nonlinear in its parameters and cannot be estimated with linear regression:

$$\begin{aligned} y_{1,t} &= \theta_1 + (\theta_2 + \theta_3 \theta_4^t)^{-1} + \theta_5 y_{2,t} + \epsilon_{1,t} \\ y_{2,t} &= \theta_6 + (\theta_7 + \theta_8 \theta_9^t)^{-1} + \theta_{10} y_{1,t} + \epsilon_{2,t} \end{aligned}$$

This system of equations represents a rudimentary predator-prey process with y_1 as the prey and y_2 as the predator (the second term in both equations is a logistics curve). The two equations must be estimated simultaneously because of the cross-dependency of y ’s. This cross-dependency makes ϵ_1 and ϵ_2 violate the assumption of independence. Nonlinear ordinary least squares estimation of these equations produce biased and inconsistent parameter estimates. This is called *simultaneous equation bias*.

One method to remove simultaneous equation bias, in the linear case, is to replace the endogenous variables on the right-hand side of the equations with predicted values that are uncorrelated with the error terms. These predicted values can be obtained through a preliminary, or “first-stage,” *instrumental variable regression*. *Instrumental variables*, which are uncorrelated with the error term, are used as regressors to model the predicted values. The parameter estimates are obtained by a second regression by using the predicted values of the regressors. This process is called *two-stage least squares*.

In the nonlinear case, nonlinear ordinary least squares estimation is performed iteratively by using a linearization of the model with respect to the parameters. The instrumental solution to simultaneous equation bias in the nonlinear case is the same as the linear case, except the linearization of the model with respect to the parameters is predicted by the instrumental regression. Nonlinear two-stage least squares is one of several instrumental variables methods available in the MODEL procedure to handle simultaneous equation bias.

When you have a system of several regression equations, the random errors of the equations can be correlated. In this case, the large-sample efficiency of the estimation can be improved by using a joint generalized least squares method that takes the cross-equation correlations into account. If the equations are not simultaneous (no dependent regressors), then *seemingly unrelated regression* (SUR) can be used. The SUR method requires an estimate of the cross-equation error covariance matrix, Σ . The usual approach is to first fit the

equations by using OLS, compute an estimate $\hat{\Sigma}$ from the OLS residuals, and then perform the SUR estimation based on $\hat{\Sigma}$. The MODEL procedure estimates Σ by default, or you can supply your own estimate of Σ .

If the equation system is simultaneous, you can combine the 2SLS and SUR methods to take into account both simultaneous equation bias and cross-equation correlation of the errors. This is called *three-stage least squares* or 3SLS.

A different approach to the simultaneous equation bias problem is the full information maximum likelihood (FIML) estimation method. FIML does not require instrumental variables, but it assumes that the equation errors have a multivariate normal distribution. 2SLS and 3SLS estimation do not assume a particular distribution for the errors.

Other nonnormal error distribution models can be estimated as well. The centered t distribution with estimated degrees of freedom and nonconstant variance is an additional built-in likelihood function. If the distribution of the equation errors is not normal or t but known, then the log likelihood can be specified by using the ERRORMODEL statement.

Once a nonlinear model has been estimated, it can be used to obtain forecasts. If the model is linear in the variables you want to forecast, a simple linear solve can generate the forecasts. If the system is nonlinear, an iterative procedure must be used. The preceding example system is linear in its endogenous variables. The MODEL procedure's SOLVE statement is used to forecast nonlinear models.

One of the main purposes of creating models is to obtain an understanding of the relationship among the variables. There are usually only a few variables in a model you can control (for example, the amount of money spent on advertising). Often you want to determine how to change the variables under your control to obtain some target goal. This process is called *goal seeking*. PROC MODEL allows you to solve for any subset of the variables in a system of equations given values for the remaining variables.

The nonlinearity of a model creates two problems with the forecasts: the forecast errors are not normally distributed with zero mean, and no formula exists to calculate the forecast confidence intervals. PROC MODEL provides Monte Carlo techniques, which, when used with the covariance of the parameters and error covariance matrix, can produce approximate error bounds on the forecasts. The following distributions on the errors are supported for multivariate Monte Carlo simulation:

- Cauchy
- chi-squared
- empirical
- F
- Poisson
- t
- uniform

A transformation technique is used to create a covariance matrix for generating the correct innovations in a Monte Carlo simulation.

Getting Started: MODEL Procedure

This section introduces the MODEL procedure and shows how to use PROC MODEL for several kinds of nonlinear regression analysis and nonlinear systems simulation problems.

Nonlinear Regression Analysis

One of the most important uses of PROC MODEL is to estimate unknown parameters in a nonlinear model. A simple nonlinear model has the form:

$$y = f(\mathbf{x}, \boldsymbol{\theta}) + \epsilon$$

where \mathbf{x} is a vector of exogenous variables. To estimate unknown parameters by using PROC MODEL, do the following:

1. Use the DATA= option in a PROC MODEL statement to specify the input SAS data set that contains y and \mathbf{x} , the observed values of the variables.
2. Write the equation for the model by using SAS programming statements, including all parameters and arithmetic operators but leaving off the unobserved error component, ϵ .
3. Use a FIT statement to fit the model equation to the input data to determine the unknown parameters, $\boldsymbol{\theta}$.

An Example

The SASHELP library contains the data set CITIMON, which contains the variable LHUR, the monthly unemployment figures, and the variable IP, the monthly industrial production index. You suspect that the unemployment rates are inversely proportional to the industrial production index. Assume that these variables are related by the following nonlinear equation:

$$lhur = \frac{1}{a \cdot ip + b} + c + \epsilon$$

In this equation a , b , and c are unknown coefficients and ϵ is an unobserved random error.

The following statements illustrate how to use PROC MODEL to estimate values for a , b , and c from the data in SASHELP.CITIMON.

```
proc model data=sashelp.citimon;
    lhur = 1/(a * ip + b) + c;
    fit lhur;
run;
```

Notice that the model equation is written as a SAS assignment statement. The variable LHUR is assumed to be the dependent variable because it is named in the FIT statement and is on the left-hand side of the assignment.

PROC MODEL determines that LHUR and IP are observed variables because they are in the input data set. A, B, and C are treated as unknown parameters to be estimated from the data because they are not in the input data set. If the data set contained a variable named A, B, or C, you would need to explicitly declare the parameters with a PARMS statement.

In response to the FIT statement, PROC MODEL estimates values for A, B, and C by using nonlinear least squares and prints the results. The first part of the output is a “Model Summary” table, shown in [Figure 19.1](#).

Figure 19.1 Model Summary Report

The MODEL Procedure	
Model Summary	
Model Variables	1
Parameters	3
Equations	1
Number of Statements	1
Model Variables	LHUR
Parameters	a b c
Equations	LHUR

This table details the size of the model, including the number of programming statements that define the model, and lists the dependent variables (LHUR in this case), the unknown parameters (A, B, and C), and the model equations. In this case the equation is named for the dependent variable, LHUR.

PROC MODEL then prints a summary of the estimation problem, as shown in [Figure 19.2](#).

Figure 19.2 Estimation Problem Report

The Equation to Estimate is	
LHUR =	F(a, b, c(1))

The notation used in the summary of the estimation problem indicates that LHUR is a function of A, B, and C, which are to be estimated by fitting the function to the data. If the partial derivative of the equation with respect to a parameter is a simple variable or constant, the derivative is shown in parentheses after the parameter name. In this case, the derivative with respect to the intercept C is 1. The derivatives with respect to A and B are complex expressions and so are not shown.

Next, PROC MODEL prints an estimation summary as shown in [Figure 19.3](#).

Figure 19.3 Estimation Summary Report

The MODEL Procedure	
OLS Estimation Summary	
Data Set Options	
DATA=	SASHELP.CITIMON
Minimization Summary	
Parameters Estimated	3
Method	Gauss
Iterations	10
Final Convergence Criteria	
R	0.000737
PPC(b)	0.003943
RPC(b)	0.00968
Object	4.784E-6
Trace(S)	0.533325
Objective Value	0.522214
Observations Processed	
Read	145
Solved	145
Used	144
Missing	1

The estimation summary provides information on the iterative process used to compute the estimates. The heading “OLS Estimation Summary” indicates that the nonlinear ordinary least squares (OLS) estimation method is used. This table indicates that all three parameters were estimated successfully by using 144 nonmissing observations from the data set SASHELP.CITIMON. Calculating the estimates required 10 iterations of the GAUSS method. Various measures of how well the iterative process converged are also shown. For example, the “RPC(B)” value 0.00968 means that on the final iteration the largest relative change in any estimate was for parameter B, which changed by 0.968 percent. See the section “[Convergence Criteria](#)” on page 1107 for details.

PROC MODEL then prints the estimation results. The first part of this table is the summary of residual errors, shown in [Figure 19.4](#).

Figure 19.4 Summary of Residual Errors Report

The MODEL Procedure						
Nonlinear OLS Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
LHUR	3	141	75.1989	0.5333	0.7472	0.7436

This table lists the sum of squared errors (SSE), the mean squared error (MSE), the root mean squared error (root MSE), and the R^2 and adjusted R^2 statistics. The R^2 value of 0.7472 means that the estimated model explains approximately 75 percent more of the variability in LHUR than a mean model explains.

Following the summary of residual errors is the parameter estimates table, shown in Figure 19.5.

Figure 19.5 Parameter Estimates

Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
a	0.009046	0.00343	2.63	0.0094
b	-0.57059	0.2617	-2.18	0.0309
c	3.337151	0.7297	4.57	<.0001

Because the model is nonlinear, the standard error of the estimate, the t value, and its significance level are only approximate. These values are computed using asymptotic formulas that are correct for large sample sizes but only approximately correct for smaller samples. Thus, you should use caution in interpreting these statistics for nonlinear models, especially for small sample sizes. For linear models, these results are exact and are the same as standard linear regression.

The last part of the output produced by the FIT statement is shown in Figure 19.6.

Figure 19.6 System Summary Statistics

Number of Observations		Statistics for System	
Used	144	Objective	0.5222
Missing	1	Objective*N	75.1989

This table lists the objective value for the estimation of the nonlinear system. Since there is only a single equation in this case, the objective value is the same as the residual MSE for LHUR except that the objective value does not include a degrees-of-freedom correction. This can be seen in the fact that “Objective*N” equals the residual SSE, 75.1989. N is 144, the number of observations used.

Convergence and Starting Values

Computing parameter estimates for nonlinear equations requires an iterative process. Starting with an initial guess for the parameter values, PROC MODEL tries different parameter values until the objective function of the estimation method is minimized. (The objective function of the estimation method is sometimes called the *fitting function*.) This process does not always succeed, and whether it does succeed depends greatly on the starting values used. By default, PROC MODEL uses the starting value 0.0001 for all parameters.

Consequently, in order to use PROC MODEL to achieve convergence of parameter estimates, you need to know two things: how to recognize convergence failure by interpreting diagnostic output, and how to specify reasonable starting values. The MODEL procedure includes alternate iterative techniques and grid

search capabilities to aid in finding estimates. See the section “[Troubleshooting Convergence Problems](#)” on page 1109 for more details.

Nonlinear Systems Regression

If a model has more than one endogenous variable, several facts need to be considered in the choice of an estimation method. If the model has endogenous regressors, then an instrumental variables method such as 2SLS or 3SLS can be used to avoid simultaneous equation bias. Instrumental variables must be provided to use these methods. A discussion of possible choices for instrumental variables is provided in the section “[Choice of Instruments](#)” on page 1162 in this chapter.

The following is an example of the use of 2SLS and the INSTRUMENTS statement:

```
proc model data=test2;
    exogenous x1 x2;
    parms a1 a2 b2 2.5 c2 55 d1;

    y1 = a1 * y2 + b2 * x1 * x1 + d1;
    y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

    fit y1 y2 / 2s1s;
    instruments b2 c2 _exog_;
run;
```

The estimation method selected is added after the slash (/) on the FIT statement. The INSTRUMENTS statement follows the FIT statement and in this case selects all the exogenous variables as instruments with the `_EXOG_` keyword. The parameters B2 and C2 in the instruments list request that the derivatives with respect to B2 and C2 be additional instruments.

Full information maximum likelihood (FIML) can also be used to avoid simultaneous equation bias. FIML is computationally more expensive than an instrumental variables method and assumes that the errors are normally distributed. On the other hand, FIML does not require the specification of instruments. FIML is selected with the FIML option on the FIT statement.

The preceding example is estimated with FIML by using the following statements:

```
proc model data=test2;
    exogenous x1 x2;
    parms a1 a2 b2 2.5 c2 55 d1;

    y1 = a1 * y2 + b2 * x1 * x1 + d1;
    y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

    fit y1 y2 / fiml;
run;
```

General Form Models

The single equation example shown in the preceding section was written in normalized form and specified as an assignment of the regression function to the dependent variable LHUR. However, sometimes it is impossible or inconvenient to write a nonlinear model in normalized form.

To write a general form equation, give the equation a name with the prefix “EQ.”. This EQ.-prefixed variable represents the equation error. Write the equation as an assignment to this variable.

For example, suppose you have the following nonlinear model that relates the variables x and y :

$$\epsilon = a + b \ln(cy + dx)$$

Naming this equation ‘one’, you can fit this model with the following statements:

```
proc model data=xydata;
    eq.one = a + b * log( c * y + d * x );
    fit one;
run;
```

The use of the EQ. prefix tells PROC MODEL that the variable is an error term and that it should not expect actual values for the variable ONE in the input data set.

Supply and Demand Models

General form specifications are often useful when you have several equations for the same dependent variable. This is common in supply and demand models, where both the supply equation and the demand equation are written as predictions for quantity as functions of price.

For example, consider the following supply and demand system:

$$\begin{aligned} \text{(supply)} \quad \text{quantity} &= \alpha_1 + \alpha_2 \text{ price} + \epsilon_1 \\ \text{(demand)} \quad \text{quantity} &= \beta_1 + \beta_2 \text{ price} + \beta_3 \text{ income} + \epsilon_2 \end{aligned}$$

Assume the *quantity* of interest is the amount of energy consumed in the U.S., the *price* is the price of gasoline, and the *income* variable is the consumer debt. When the market is at equilibrium, these equations determine the market price and the equilibrium quantity. These equations are written in general form as

$$\begin{aligned} \epsilon_1 &= \text{quantity} - (\alpha_1 + \alpha_2 \text{ price}) \\ \epsilon_2 &= \text{quantity} - (\beta_1 + \beta_2 \text{ price} + \beta_3 \text{ income}) \end{aligned}$$

Note that the endogenous variables *quantity* and *price* depend on two error terms so that OLS should not be used. The following example uses three-stage least squares estimation.

Data for this model is obtained from the SASHELP.CITIMON data set.

```

title1 'Supply-Demand Model using General-form Equations';
proc model data=sashelp.citimon;
  endogenous eegp eec;
  exogenous exvus cciutc;
  parameters a1 a2 b1 b2 b3 ;
  label eegp    = 'Gasoline Retail Price'
        eec     = 'Energy Consumption'
        cciutc  = 'Consumer Debt';

  /* ----- Supply equation ----- */
  eq.supply = eec - (a1 + a2 * eegp );

  /* ----- Demand equation ----- */
  eq.demand = eec - (b1 + b2 * eegp + b3 * cciutc);

  /* ----- Instrumental variables -----*/
  lageegp = lag(eegp); lag2eegp=lag2(eegp);

  /* ----- Estimate parameters ----- */
  fit supply demand / n3sls fsrsq;
  instruments _EXOG_ lageegp lag2eegp;
run;

```

The FIT statement specifies the two equations to estimate and the method of estimation, N3SLS. Note that '3SLS' is an alias for N3SLS. The option FSRSQ is selected to get a report of the first stage R^2 to determine the acceptability of the selected instruments.

Since three-stage least squares is an instrumental variables method, instruments are specified with the INSTRUMENTS statement. The instruments selected are all the exogenous variables, selected with the _EXOG_ option, and two lags of the variable EEGP: LAGEEGP and LAG2EEGP.

The data set CITIMON has four observations that generate missing values because values for EEGP, EEC, or CCIUTC are missing. This is revealed in the "Observations Processed" output shown in [Figure 19.7](#). Missing values are also generated when the equations cannot be computed for a given observation. Missing observations are not used in the estimation.

Figure 19.7 Supply-Demand Observations Processed

Supply-Demand Model using General-form Equations	
The MODEL Procedure	
3SLS Estimation Summary	
Observations Processed	
Read	145
Solved	143
First	3
Last	145
Used	139
Missing	4
Lagged	2

The lags used to create the instruments also reduce the number of observations used. In this case, the first two observations were used to fill the lags of EEGP.

The data set has a total of 145 observations, of which four generated missing values and two were used to fill lags, which left 139 observations for the estimation. In the estimation summary, in [Figure 19.8](#), the total degrees of freedom for the model and error is 139.

Figure 19.8 Supply-Demand Parameter Estimates

Supply-Demand Model using General-form Equations							
The MODEL Procedure							
Nonlinear 3SLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
supply	2	137	43.2677	0.3158	0.5620		
demand	3	136	39.5791	0.2910	0.5395		
Nonlinear 3SLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	1st Stage R-Square		
a1	7.30952	0.3799	19.24	<.0001	1.0000		
a2	-0.00853	0.00328	-2.60	0.0103	0.9617		
b1	6.82196	0.3788	18.01	<.0001	1.0000		
b2	-0.00614	0.00303	-2.02	0.0450	0.9617		
b3	9E-7	3.165E-7	2.84	0.0051	1.0000		

One disadvantage of specifying equations in general form is that there are no actual values associated with the equation, so the R^2 statistic cannot be computed.

Solving Simultaneous Nonlinear Equation Systems

You can use a SOLVE statement to solve the nonlinear equation system for some variables when the values of other variables are given.

Consider the supply and demand model shown in the preceding example. The following statement computes equilibrium price (EEGP) and quantity (EEC) values for given observed cost (CCIUTC) values and stores them in the output data set EQUILIB.

```

title1 'Supply-Demand Model using General-form Equations';
proc model data=sashelp.citimon(where=(eec ne .));
  endogenous eegp eec;
  exogenous exvus cciutc;
  parameters a1 a2 a3 b1 b2 ;

```

```

label eegp    = 'Gasoline Retail Price'
      eec     = 'Energy Consumption'
      cciutc  = 'Consumer Debt';

/* ----- Supply equation ----- */
eq.supply = eec - (a1 + a2 * eegp + a3 * cciutc);

/* ----- Demand equation ----- */
eq.demand = eec - (b1 + b2 * eegp );

/* ----- Instrumental variables -----*/
lageegp = lag(eegp); lag2eegp=lag2(eegp);

/* ----- Estimate parameters ----- */
instruments _EXOG_ lageegp lag2eegp;
fit supply demand / n3sls ;
solve eegp eec / out=equilib;
run;

```

As a second example, suppose you want to compute points of intersection between the square root function and hyperbolas of the form $a + b/x$. That is, you want to solve the system:

$$\begin{aligned} \text{(square root)} \quad y &= \sqrt{x} \\ \text{(hyperbola)} \quad y &= a + \frac{b}{x} \end{aligned}$$

The following statements read parameters for several hyperbolas in the input data set TEST and solve the nonlinear equations. The SOLVEPRINT option in the SOLVE statement prints the solution values. The ID statement is used to include the values of A and B in the output of the SOLVEPRINT option.

```

title1 'Solving a Simultaneous System';
data test;
  input a b @@;
datalines;
  0 1    1 1    1 2
;

proc model data=test;
  eq.sqrt      = sqrt(x) - y;
  eq.hyperbola = a + b / x - y;
  solve x y / solveprint;
  id a b;
run;

```

The printed output produced by this example consists of a model summary report, a listing of the solution values for each observation, and a solution summary report. The model summary for this example is shown in [Figure 19.9](#).

Figure 19.9 Model Summary Report

Solving a Simultaneous System	
The MODEL Procedure	
Model Summary	
Model Variables	2
ID Variables	2
Equations	2
Number of Statements	2
Model Variables	x y
Equations	sqrt hyperbola

The output produced by the SOLVEPRINT option is shown in [Figure 19.10](#).

Figure 19.10 Solution Values for Each Observation

Solving a Simultaneous System						
The MODEL Procedure						
Simultaneous Simulation						
Observation 1	a	0	b	1.0000	eq.hyperbola	0.000000
	Iterations	17	CC	0.000000		
Solution Values						
	x		y			
	1.000000		1.000000			
Observation 2	a	1.0000	b	1.0000	eq.hyperbola	0.000000
	Iterations	5	CC	0.000000		
Solution Values						
	x		y			
	2.147899		1.465571			
Observation 3	a	1.0000	b	2.0000	eq.hyperbola	0.000000
	Iterations	4	CC	0.000000		
Solution Values						
	x		y			
	2.875130		1.695621			

For each observation, a heading line is printed that lists the values of the ID variables for the observation and information about the iterative process used to compute the solution. The number of iterations required, and the convergence measure (labeled CC) are printed. This convergence measure indicates the maximum error by which solution values fail to satisfy the equations. When this error is small enough (as determined by the CONVERGE= option), the iterations terminate. The equation with the largest error is indicated. For example, for observation 3 the HYPERBOLA equation has an error of 4.42×10^{-13} while the error of the SQRT equation is even smaller. Following the heading line for the observation, the solution values are printed.

The last part of the SOLVE statement output is the solution summary report shown in Figure 19.11. This report summarizes the solution method used (Newton's method by default), the iteration history, and the observations processed.

Figure 19.11 Solution Summary Report

Solving a Simultaneous System	
The MODEL Procedure	
Simultaneous Simulation	
Data Set Options	
DATA=	TEST
Solution Summary	
Variables Solved	2
Implicit Equations	2
Solution Method	NEWTON
CONVERGE=	1E-8
Maximum CC	9.176E-9
Maximum Iterations	17
Total Iterations	26
Average Iterations	8.666667
Observations Processed	
Read	3
Solved	3
Variables Solved For	x y
Equations Solved	sqrt hyperbola

Monte Carlo Simulation

The RANDOM= option is used to request Monte Carlo (or stochastic) simulation to generate confidence intervals for a forecast. The confidence intervals are implied by the model's relationship to implicit random error term ϵ and the parameters.

The Monte Carlo simulation generates a random set of additive error values, one for each observation and

each equation, and computes one set of perturbations of the parameters. These new parameters, along with the additive error terms, are then used to compute a new forecast that satisfies this new simultaneous system. Then a new set of additive error values and parameter perturbations is computed, and the process is repeated the requested number of times.

Consider the following exchange rate model for the U.S. dollar with the German mark and the Japanese yen:

$$rate_jp = a_1 + b_1 im_jp + c_1 di_jp;$$

$$rate_wg = a_2 + b_2 im_wg + c_2 di_wg;$$

where *rate_jp* and *rate_wg* are the exchange rate of the Japanese yen and the German mark versus the U.S. dollar, respectively; *im_jp* and *im_wg* are the imports from Japan and Germany in 1984 dollars, respectively; and *di_jp* and *di_wg* are the differences in inflation rate of Japan and the U.S., and Germany and the U.S., respectively. The Monte Carlo capabilities of the MODEL procedure are used to generate error bounds on a forecast by using this model.

```
proc model data=exchange;
  endo im_jp im_wg;
  exo di_jp di_wg;
  parms a1 a2 b1 b2 c1 c2;
  label rate_jp = 'Exchange Rate of Yen/$'
        rate_wg = 'Exchange Rate of Gm/$'
        im_jp = 'Imports to US from Japan in 1984 $'
        im_wg = 'Imports to US from WG in 1984 $'
        di_jp = 'Difference in Inflation Rates US-JP'
        di_wg = 'Difference in Inflation Rates US-WG';

  rate_jp = a1 + b1*im_jp + c1*di_jp;
  rate_wg = a2 + b2*im_wg + c2*di_wg;

  /* Fit the EXCHANGE data */
  fit rate_jp rate_wg / sur outest=xch_est outcov outs=s;

  /* Solve using the WHATIF data set */
  solve rate_jp rate_wg / data=whatif estdata=xch_est sdata=s
    random=100 seed=123 out=monte forecast;
  id yr;
  range yr=1986;
run;
```

Data for the EXCHANGE data set was obtained from the Department of Commerce and the yearly “Economic Report of the President.”

First, the parameters are estimated using SUR selected by the SUR option in the FIT statement. The OUTEST= option is used to create the XCH_EST data set which contains the estimates of the parameters. The OUTCOV option adds the covariance matrix of the parameters to the XCH_EST data set. The OUTS= option is used to save the covariance of the equation error in the data set S.

Next, Monte Carlo simulation is requested by using the RANDOM= option in the SOLVE statement. The data set WHATIF is used to drive the forecasts. The ESTDATA= option reads in the XCH_EST data set which contains the parameter estimates and covariance matrix. Because the parameter covariance matrix is included, perturbations of the parameters are performed. The SDATA= option causes the Monte Carlo

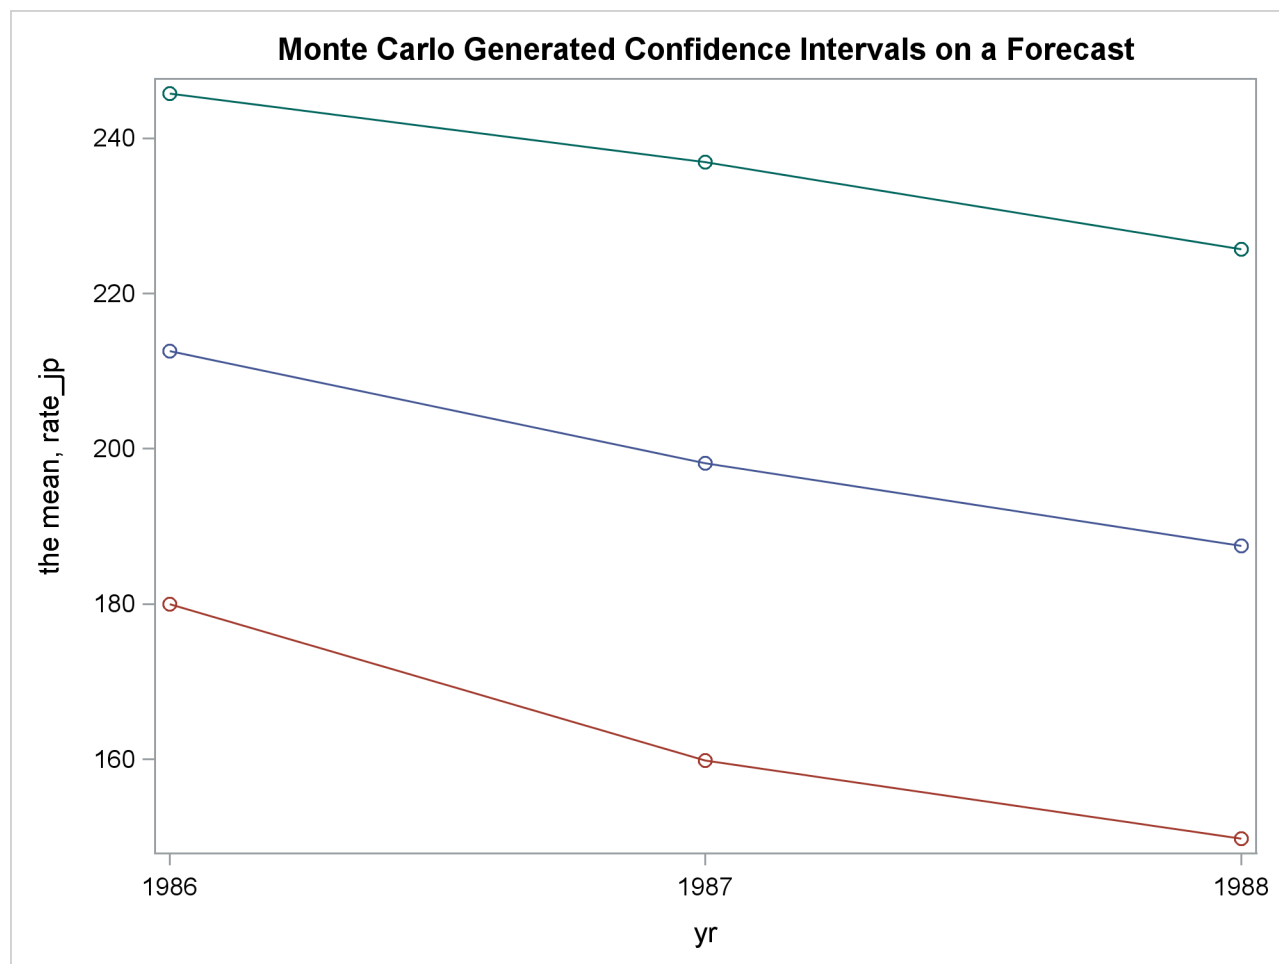
simulation to use the equation error covariance in the S data set to perturb the equation errors. The SEED= option selects the number 123 as a seed value for the random number generator. The output of the Monte Carlo simulation is written to the data set MONTE selected by the OUT= option.

To generate a confidence interval plot for the forecast, use PROC UNIVARIATE to generate percentile bounds and use PROC SGPLOT to plot the graph. The following SAS statements produce the graph in [Figure 19.12](#).

```
proc sort data=monte;
    by yr;
run;

proc univariate data=monte noprint;
    by yr;
    var rate_jp rate_wg;
    output out=bounds mean=mean p5=p5 p95=p95;
run;

title "Monte Carlo Generated Confidence Intervals on a Forecast";
proc sgplot data=bounds noautolegend;
    series x=yr y=mean / markers;
    series x=yr y=p5 / markers;
    series x=yr y=p95 / markers;
run;
```

Figure 19.12 Monte Carlo Confidence Interval Plot

Syntax: MODEL Procedure

The following statements can be used with the MODEL procedure:

```

PROC MODEL options ;
  ABORT ;
  ARRAY arrayname variable-list ... ;
  ATTRIB variable-list1 attribute-list1 < variable-list2 attribute-list2 ... > ;
  BOUNDS bound1 < , bound2 ... > ;
  BY variable-list ;
  CALL name ;
  CALL name( expression1 < , expression2 ... > ) ;
  CONTROL variable < value > ... ;
  DELETE ;

```

```

DO ;
DO variable = expression < TO expression > < BY expression >
    < , expression TO expression < BY expression > ... > < WHILE expression >
    < UNTIL expression > ;
END ;
DROP variable ... ;
ENDOGENOUS variable < initial-values > ... ;
ERRORMODEL equation-name ~ distribution < CDF=( CDF(options) ) > ;
ESTIMATE item1 < , item2 ... > < ,/ options > ;
EXOGENOUS variable < initial values > ... ;
FIT equations < PARMS=( parameter values ... ) > < START=( parameter values ... ) >
    < DROP=( parameters ) > < / options > ;
FORMAT variable-list < format > < DEFAULT= default-format > ;
GOTO statement-label ;
ID variable-list ;
IF expression ;
IF expression THEN programming-statement1 ; < ELSE programming-statement2 > ;
variable = expression ;
variable + expression ;
INCLUDE model-file ... ;
INSTRUMENTS < instruments > < _EXOG_ > < EXCLUDE=( parameters ) > < / options > ;
KEEP variable ... ;
LABEL variable = 'label' ... ;
LENGTH variable-list < $ > length ... < DEFAULT=length > ;
LINK statement-label ;
MOMENT variable-list = moment-specification ... ;
OUTVARS variable ... ;
PARAMETERS variable1 < value1 > < variable2 < value2 ... > > ;
PUT print-item ... < @ > < @@ > ;
RANGE variable < = first > < TO last > ;
RENAME old-name1 = new-name1 < ... old-name2 = new-name2 > ;
RESET options ;
RESTRICT restriction1 < , restriction2 ... > ;
RETAIN variable-list1 value1 < variable-list2 value2 ... > ;
RETURN ;
SOLVE variable-list < SATISFY=(equations) > < / options > ;
SUBSTR ( variable, index, length ) = expression ;
SELECT < ( expression ) > ;
OTHERWISE programming-statement ;
STOP ;
TEST < "name" > test1 < , test2 ... > < ,/ options > ;
VAR variable < initial-values > ... ;
WEIGHT variable ;
WHEN ( expression ) programming-statement ;

```

Functional Summary

The statements and options in the MODEL procedure are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify the input data set for the variables	FIT, SOLVE	DATA=
specify the input data set for parameters	FIT, SOLVE	ESTDATA=
specify the method for handling missing values	FIT	MISSING=
specify the input data set for parameters	MODEL	PARMSDATA=
request that the procedure produce graphics via the Output Delivery System	MODEL	PLOTS=
specify the output data set for residual, predicted, or actual values	FIT	OUT=
specify the output data set for solution mode results	SOLVE	OUT=
write the actual values to OUT= data set	FIT	OUTACTUAL
select all output options	FIT	OUTALL
write the covariance matrix of the estimates	FIT	OUTCOV
write the parameter estimates to a data set	FIT	OUTEST=
write the parameter estimates to a data set	MODEL	OUTPARMS=
write the observations used to start the lags	SOLVE	OUTLAGS
write the predicted values to the OUT= data set	FIT	OUTPREDICT
write the residual values to the OUT= data set	FIT	OUTRESID
write the covariance matrix of the equation errors to a data set	FIT	OUTS=
write the S matrix used in the objective function definition to a data set	FIT	OUTSUSED=
write the estimate of the variance matrix of the moment generating function	FIT	OUTV=
read the covariance matrix of the equation errors	FIT, SOLVE	SDATA=
read the covariance matrix for GMM and IT-GMM	FIT	VDATA=
specify the name of the time variable	FIT, SOLVE, MODEL	TIME=
select the estimation type to read	FIT, SOLVE	TYPE=
General ESTIMATE Statement Options		
specify the name of the data set in which the estimate of the functions of the parameters are to be written	ESTIMATE	OUTEST=

Description	Statement	Option
write the covariance matrix of the functions of the parameters to the OUTEST= data set	ESTIMATE	OUTCOV
print the covariance matrix of the functions of the parameters	ESTIMATE	COVB
print the correlation matrix of the functions of the parameters	ESTIMATE	CORRB
Printing Options for FIT Tasks		
print the modified Breusch-Pagan test for heteroscedasticity	FIT	BREUSCH
print the Chow test for structural breaks	FIT	CHOW=
print collinearity diagnostics	FIT	COLLIN
print the correlation matrices	FIT	CORR
print the correlation matrix of the parameters	FIT	CORRB
print the correlation matrix of the residuals	FIT	CORRS
print the covariance matrices	FIT	COV
print the covariance matrix of the parameters	FIT	COVB
print the covariance matrix of the residuals	FIT	COVS
print Durbin-Watson d statistics	FIT	DW
print first-stage R^2 statistics	FIT	FSRSQ
print Godfrey's tests for autocorrelated residuals for each equation	FIT	GODFREY
print Hausman's specification test	FIT	HAUSMAN
print tests of normality of the model residuals	FIT	NORMAL
print the predictive Chow test for structural breaks	FIT	PCHOW=
specify all the printing options	FIT	PRINTALL
print White's test for heteroscedasticity	FIT	WHITE
Options to Control FIT Iteration Output		
print the inverse of the crossproducts Jacobian matrix	FIT	I
print a summary iteration listing	FIT	ITPRINT
print a detailed iteration listing	FIT	ITDETAILS
print the crossproduct Jacobian matrix	FIT	XPX
specify all the iteration printing-control options	FIT	ITALL
Options to Control the Minimization Process		
specify the convergence criteria	FIT	CONVERGE=
select the Hessian approximation used for FIML	FIT	HESSIAN=

Description	Statement	Option
specify the local truncation error bound for the integration	FIT, SOLVE, MODEL	LTEBOUND=
specify the maximum number of iterations allowed	FIT	MAXITER=
specify the maximum number of subiterations allowed	FIT	MAXSUBITER=
select the iterative minimization method to use	FIT	METHOD=
specify the smallest allowed time step to be used in the integration	FIT, SOLVE, MODEL	MINTIMESTEP=
modify the iterations for estimation methods that iterate the S matrix or the V matrix	FIT	NESTIT
specify the smallest pivot value	MODEL, FIT, SOLVE	SINGULAR
specify the number of minimization iterations to perform at each grid point	FIT	STARTITER=
specify a weight variable	WEIGHT	
Options to Read and Write Model Files		
delete a model from a model file	DELETEMODEL	MODNAME=
read a model from one or more input model files	INCLUDE	MODEL=
suppress the default output of the model file	MODEL, RESET	NOSTORE
specify the name of an output model file	MODEL, RESET	OUTMODEL=
delete the current model	RESET	PURGE
Options to List or Analyze the Structure of the Model		
print a dependency structure of a model	MODEL	BLOCK
print a graph of the dependency structure of a model	MODEL	GRAPH
print the model program and variable lists	MODEL	LIST
print the derivative tables and compiled model program code	MODEL	LISTCODE
print a dependency list	MODEL	LISTDEP
print a table of derivatives	MODEL	LISTDER
print a cross-reference of the variables	MODEL	XREF
General Printing Control Options		
expand parts of the printed output	FIT, SOLVE	DETAILS
print a message for each statement as it is executed	FIT, SOLVE	FLOW
select the maximum number of execution errors that can be printed	FIT, SOLVE	MAXERRORS=
select the number of decimal places shown in the printed output	FIT, SOLVE	NDEC=

Description	Statement	Option
suppress the normal printed output	FIT, SOLVE	NOPRINT
specify all the noniteration printing options	FIT, SOLVE	PRINTALL
print the result of each operation as it is executed	FIT, SOLVE	TRACE
request a comprehensive memory usage summary	FIT, SOLVE, MODEL, RESET	MEMORYUSE
turn off the NOPRINT option	RESET	PRINT
Statements that Declare Variables		
associate a name with a list of variables and constants	ARRAY	
declare a variable to have a fixed value	CONTROL	
declare a variable to be a dependent or endogenous variable	ENDOGENOUS	
declare a variable to be an independent or exogenous variable	EXOGENOUS	
specify identifying variables	ID	
assign a label to a variable	LABEL	
select additional variables to be output	OUTVARS	
declare a variable to be a parameter	PARAMETERS	
force a variable to hold its value from a previous observation	RETAIN	
declare a model variable	VAR	
declare an instrumental variable	INSTRUMENTS	
omit the default intercept term in the instruments list	INSTRUMENTS	NOINT
General FIT Statement Options		
omit parameters from the estimation	FIT	DROP=
associate a variable with an initial value as a parameter or a constant	FIT	INITIAL=
bypass OLS to get initial parameter estimates for GMM, ITGMM, or FIML	FIT	NOOLS
bypass 2SLS to get initial parameter estimates for GMM, ITGMM, or FIML	FIT	NO2SLS
specify the parameters to estimate	FIT	PARMS=
request confidence intervals on estimated parameters	FIT	PRL=
select a grid search	FIT	START=
Options to Control the Estimation Method Used		
specify nonlinear ordinary least squares	FIT	OLS

Description	Statement	Option
specify iterated nonlinear ordinary least squares	FIT	ITOLS
specify seemingly unrelated regression	FIT	SUR
specify iterated seemingly unrelated regression	FIT	ITSUR
specify two-stage least squares	FIT	2SLS
specify iterated two-stage least squares	FIT	IT2SLS
specify three-stage least squares	FIT	3SLS
specify iterated three-stage least squares	FIT	IT3SLS
specify full information maximum likelihood	FIT	FIML
specify simulated method of moments	FIT	NDRAW
specify number of draws for the V matrix	FIT	NDRAWV
specify number of initial observations for SMM	FIT	NPREOBS
select the variance-covariance estimator used for FIML	FIT	COVBEST=
specify generalized method of moments	FIT	GMM
specify the kernel for GMM and ITGMM	FIT	KERNEL=
specify iterated generalized method of moments	FIT	ITGMM
specify the type of generalized inverse used for the covariance matrix	FIT	GINV=
specify the denominator for computing variances and covariances	FIT	VARDEF=
specify adding the variance adjustment for SMM	FIT	ADJSMMV
specify variance correction for heteroscedasticity	FIT	HCCME=
specify GMM variance under arbitrary weighting matrix	FIT	GENGMMV
specify GMM variance under optimal weighting matrix	FIT	NOGENGMMV
Solution Mode Options		
select a subset of the model equations	SOLVE	SATISFY=
solve only for missing variables	SOLVE	FORECAST
solve for all solution variables	SOLVE	SIMULATE
Solution Mode Options: Lag Processing		
use solved values in the lag functions	SOLVE	DYNAMIC
use actual values in the lag functions	SOLVE	STATIC
produce successive forecasts to a fixed forecast horizon	SOLVE	NAHEAD=

Description	Statement	Option
select the observation to start dynamic solutions	SOLVE	START=
Solution Mode Options: Numerical Methods		
specify the maximum number of iterations allowed	SOLVE	MAXITER=
specify the maximum number of subiterations allowed	SOLVE	MAXSUBITER=
specify the convergence criteria	SOLVE	CONVERGE=
compute a simultaneous solution using a Jacobi-like iteration	SOLVE	JACOBI
compute a simultaneous solution using a Gauss-Seidel-like iteration	SOLVE	SEIDEL
compute a simultaneous solution using Newton's method	SOLVE	NEWTON
compute a nonsimultaneous solution	SOLVE	SINGLE
Monte Carlo Simulation Options		
specify quasi-random number generator	SOLVE	QUASI=
specify pseudo-random number generator	SOLVE	PSUEDO=
repeat the solution multiple times	SOLVE	RANDOM=
initialize the pseudo-random number generator	SOLVE	SEED=
specify copula options	SOLVE	COPULA=
Solution Mode Printing Options		
print between data points integration values for the DERT. variables and the auxiliary variables	FIT, SOLVE, MODEL	INTGPRINT
print the solution approximation and equation errors	SOLVE	ITPRINT
print the solution values and residuals at each observation	SOLVE	SOLVEPRINT
print various summary statistics	SOLVE	STATS
print tables of Theil inequality coefficients	SOLVE	THEIL
specify all printing control options	SOLVE	PRINTALL
General TEST Statement Options		
specify that a Wald test be computed	TEST	WALD
specify that a Lagrange multiplier test be computed	TEST	LM
specify that a likelihood ratio test be computed	TEST	LR
request all three types of tests	TEST	ALL

Description	Statement	Option
specify the name of an output SAS data set that contains the test results	TEST	OUT=
Miscellaneous Statements		
specify the range of observations to be used	RANGE	
subset the data set with BY variables	BY	

PROC MODEL Statement

PROC MODEL *options* ;

The following options can be specified in the PROC MODEL statement. All of the nonassignment options (the options that do not accept a value after an equal sign) can have NO prefixed to the option name in the RESET statement to turn the option off. The default case is not explicitly indicated in the discussion that follows. Thus, for example, the option DETAILS is documented in the following, but NODETAILS is not documented since it is the default. Also, the NOSTORE option is documented because STORE is the default.

Data Set Options

DATA=SAS-data-set

names the input data set. Variables in the model program are looked up in the DATA= data set and, if found, their attributes (type, length, label, format) are set to be the same as those in the input data set (if not previously defined otherwise). The values for the variables in the program are read from the input data set when the model is estimated or simulated by FIT and SOLVE statements.

OUTPARMS=SAS-data-set

writes the parameter estimates to a SAS data set. See the section “[Output Data Sets](#)” on page 1187 for details.

PARMSDATA=SAS-data-set

names the SAS data set that contains the parameter estimates. In PROC MODEL, you have several options to specify starting values for the parameters to be estimated. When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. If no options are specified for the starting value, the default value of 0.0001 is used. See the section “[Input Data Sets](#)” on page 1182 for details.

PLOTS=global-plot-options / plot-request

selects plots that the MODEL procedure produces via the Output Delivery System. For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User's*

Guide). The *global-plot-options* apply to all relevant plots generated by the MODEL procedure. The *global-plot-options* supported by the MODEL procedure follow.

Global Plot Options

ONLY suppresses the default plots. Only the plots specifically requested are produced.

UNPACKPANEL breaks a graphic that is otherwise paneled into individual component plots.

Specific Plot Options

ALL requests that all plots appropriate for the particular analysis be produced.

ACF produces the autocorrelation function plot.

IACF produces the inverse autocorrelation function plot of residuals.

PACF produces the partial autocorrelation function plot of residuals.

FITPLOT plots the predicted and actual values.

COOKSD produces the Cook's D plot.

QQ produces a QQ plot of residuals.

RESIDUAL | RES plots the residuals.

STUDENTRESIDUAL plots the studentized residuals.

RESIDUALHISTOGRAM | RESIDHISTOGRAM plots the histogram of residuals.

NONE suppresses all plots.

Options to Read and Write Model Files

MODEL=*model-name*

MODEL=(*model-list*)

reads the model from one or more input model files created by previous PROC MODEL executions. Model files are written by the OUTMODEL= option.

NOSTORE

suppresses the default output of the model file. This option is applicable only when FIT or SOLVE statements are not used, the MODEL= option is not used, and when a model is specified.

OUTMODEL=*model-name*

specifies the name of an output model file to which the model is to be written. Starting with SAS 9.2, model files are being stored as XML-based SAS data sets instead of being stored as members of a SAS catalog as in earlier releases. This makes MODEL files more readily extendable in the future and enables Java-based applications to read the MODEL files directly. To change this behavior, use the SAS *global-CMPMODEL-options*. You can choose the format in which the output model file is stored and read by using the CMPMODEL=*global-CMPMODEL-options* in an OPTIONS statement as follows.

OPTIONS CMPMODEL=*global-CMPMODEL-options*;

The global CMPMODEL options are:

CATALOG	specifies that model files be written and read from SAS catalogs only.
XML	specifies that model files be written and read from XML datasets only.
BOTH	specifies that model files be written to both XML and CATALOG formats. When BOTH is specified, model files are read from the data set first and read from the SAS catalog only if the data set is not found. This is the default option.

Options to List or Analyze the Structure of the Model

These options produce reports on the structure of the model or list the programming statements that define the models. These options are automatically reset (turned off) after the reports are printed. To turn these options back on after a RUN statement has been entered, use the RESET statement or specify the options on a FIT or SOLVE statement.

BLOCK

prints an analysis of the structure of the model given by the assignments to model variables appearing in the model program. This analysis includes a classification of model variables into endogenous (dependent) and exogenous (independent) groups based on the presence of the variable on the left-hand side of an assignment statement. The endogenous variables are grouped into simultaneously determined blocks. The dependency structure of the simultaneous blocks and exogenous variables is also printed. The BLOCK option cannot analyze dependencies implied by general form equations.

GRAPH

prints the graph of the dependency structure of the model. The GRAPH option also invokes the BLOCK option and produces a graphical display of the information listed by the BLOCK option.

LIST

prints the model program and variable lists, including the statements added by PROC MODEL and macros.

LISTALL

selects the LIST, LISTDEP, LISTDER, and LISTCODE options.

LISTCODE

prints the derivative tables and compiled model program code. LISTCODE is a debugging feature and is not normally needed.

LISTDEP

prints a report that lists for each variable in the model program the variables that depend on it and that it depends on. These lists are given separately for current-period values and for lagged values of the variables.

The information displayed is the same as that used to construct the BLOCK report but differs in that the information is listed for all variables (including parameters, control variables, and program

variables), not just for the model variables. Classification into endogenous and exogenous groups and analysis of simultaneous structure is not done by the LISTDEP report.

LISTDER

prints a table of derivatives for FIT and SOLVE tasks. (The LISTDER option is applicable only for the default NEWTON method for SOLVE tasks.) The derivatives table shows each nonzero derivative computed for the problem. The derivative listed can be a constant, a variable in the model program, or a special derivative variable created to hold the result of the derivative expression. This option is turned on by the LISTCODE and PRINTALL options.

XREF

prints a cross-reference of the variables in the model program that shows where each variable was referenced or given a value. The XREF option is normally used in conjunction with the LIST option. A more detailed description is given in the section “[Diagnostics and Debugging](#)” on page 1245.

General Printing Control Options

DETAILS

specifies the detailed printout. Parts of the printed output are expanded when the DETAILS option is specified. The following additional graphs of the residuals are produced when graphics output is enabled: ACF, PACF, IACF, white noise, and QQ plot versus the normal.

FLOW

prints a message for each statement in the model program as it is executed. This debugging option is needed very rarely and produces voluminous output.

MAXERRORS=*n*

specifies the maximum number of execution errors that can be printed. The default is MAXERRORS=50.

NDEC=*n*

specifies the precision of the format that PROC MODEL uses when printing various numbers. The default is NDEC=3, which means that PROC MODEL attempts to print values by using the D format but ensures that at least three significant digits are shown. If the NDEC= value is greater than nine, the BEST. format is used. The smallest value allowed is NDEC=2.

The NDEC= option affects the format of most, but not all, of the floating point numbers that PROC MODEL can print. For some values (such as parameter estimates), a precision limit one or two digits greater than the NDEC= value is used. This option does not apply to the precision of the variables in the output data set.

NOPRINT

suppresses the normal printed output but does not suppress error listings. Using any other print option turns the NOPRINT option off. The PRINT option can be used with the RESET statement to turn off NOPRINT.

PRINTALL

turns on all the printing-control options. The options set by PRINTALL are DETAILS; the model information options LIST, LISTDEP, LISTDER, XREF, BLOCK, and GRAPH; the FIT task printing

options FSRSQ, COVB, CORRB, COVS, CORRS, DW, and COLLIN; and the SOLVE task printing options STATS, THEIL, SOLVEPRINT, and ITPRINT.

TRACE

prints the result of each operation in each statement in the model program as it is executed, in addition to the information printed by the FLOW option. This debugging option is needed very rarely and produces voluminous output.

MEMORYUSE

prints a report of the memory required for the various parts of the analysis.

FIT Task Options

The following options are used in the FIT statement (parameter estimation) and can also be used in the PROC MODEL statement: COLLIN, CONVERGE=, CORR, CORRB, CORRS, COVB, COVBEST=, COVS, DW, FIML, FSRSQ, GMM, HESSIAN=, I, INTGPRINT, ITALL, ITDETAILS, ITGMM, ITPRINT, ITOLS, ITSUR, IT2SLS, IT3SLS, KERNEL=, LTEBOUND=, MAXITER=, MAXSUBITER=, METHOD=, MINTIMESTEP=, NESTIT, N2SLS, N3SLS, OLS, OUTPREDICT, OUTRESID, OUTACTUAL, OUTLAGS, OUTALL, OUTCOV, SINGULAR=, STARTITER=, SUR, TIME=, VARDEF, and XPX. See the section “[FIT Statement](#)” on page 1063 for a description of these options.

When used in the PROC MODEL or RESET statement, these are default options for subsequent FIT statements. For example, the statement

```
proc model n2s1s ... ;
```

makes two-stage least squares the default parameter estimation method for FIT statements that do not specify an estimation method.

SOLVE Task Options

The following options used in the SOLVE statement can also be used in the PROC MODEL statement: CONVERGE=, DYNAMIC, FORECAST, INTGPRINT, ITPRINT, JACOBI, LTEBOUND=, MAXITER=, MAXSUBITER=, MINTIMESTEP=, NAHEAD=, NEWTON, OUTPREDICT, OUTRESID, OUTACTUAL, OUTLAGS, OUTERRORS, OUTALL, SEED=, SEIDEL, SIMULATE, SINGLE, SINGULAR=, SOLVEPRINT, START=, STATIC, STATS, THEIL, TIME=, and TYPE=. See the section “[SOLVE Statement](#)” on page 1079 for a description of these options.

When used in the PROC MODEL or RESET statement, these options provide default values for subsequent SOLVE statements.

BOUNDS Statement

```
BOUNDS bound1 <, bound2 ... > ;
```


The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the associated FIT statement (that is, to either the preceding FIT statement or, in the absence of a preceding FIT statement, to the following FIT statement). You can specify any number of BOUNDS statements.

Each *bound* is composed of parameters and constants and inequality operators:

item operator item < operator item < operator item ... > >

Each *item* is a constant, the name of an estimated parameter, or a list of parameter names. Each *operator* is <, >, <=, or >=.

You can use both the BOUNDS statement and the RESTRICT statement to impose boundary constraints; however, the BOUNDS statement provides a simpler syntax for specifying these kinds of constraints. See the section “[RESTRICT Statement](#)” on page 1079 for more information about the computational details of estimation with inequality restrictions.

Lagrange multipliers are reported for all the active boundary constraints. In the printed output and in the OUTEST= data set, the Lagrange multiplier estimates are identified with the names BOUND0, BOUND1, and so forth. The probability of the Lagrange multipliers are computed using a beta distribution (LaMonte 1994). To give the constraints more descriptive names, use the RESTRICT statement instead of the BOUNDS statement.

The following BOUNDS statement constrains the estimates of the parameters A and B and the ten parameters P1 through P10 to be between zero and one. This example illustrates the use of parameter lists to specify boundary constraints.

```
bounds 0 < a b p1-p10 < 1;
```

The following statements are an example of the use of the BOUNDS statement and they produce the output shown in [Figure 19.13](#):

```
title 'Holzman Function (1969), Himmelblau No. 21, N=3';
data zero;
  do i = 1 to 99;
    output;
  end;
run;

proc model data=zero;
  parms x1= 100 x2= 12.5 x3= 3;
  bounds .1 <= x1 <= 100,
         0 <= x2 <= 25.6,
         0 <= x3 <= 5;

  t = 2 / 3;
  u = 25 + (-50 * log(0.01 * i )) ** t;
  v = (u - x2) ** x3;
  w = exp(-v / x1);
  eq.foo = -.01 * i + w;

  fit foo / method=marquardt;
```

```
run;
```

Figure 19.13 Output from Bounded Estimation

Holzman Function (1969), Himmelblau No. 21, N=3				
The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
x1	49.99999	0	.	.
x2	25	0	.	.
x3	1.5	0	.	.

BY Statement

BY variables ;

A BY statement is used with the FIT statement to obtain separate estimates for observations in groups defined by the BY variables. Note that if an output model file is written, using the OUTMODEL= option, the parameter values stored are those from the last BY group processed. To save parameter estimates for each BY group, use the OUTEST= option in the FIT statement.

A BY statement is used with the SOLVE statement to obtain solutions for observations in groups defined by the BY variables. If the BY variables are identical in the DATA= data set and the ESTDATA= data set, then the two data sets are synchronized and the calculations are performed by using the data and parameters for each BY group. This holds for BY variables in the SDATA= data set as well. If the BY variables do not match, BY group processing is abandoned in either the ESTDATA= data set or the SDATA= data set, whichever has the missing BY value. If the DATA= data set does not contain BY variables and the ESTDATA= data set or the SDATA= data set does, then BY processing is performed for the ESTDATA= data set and the SDATA= data set by reusing the data in the DATA= data set for each BY group.

If both FIT and SOLVE tasks require BY group processing, then two separate BY statements are needed. If parameters for each BY group in the OUTEST = data set obtained from the FIT task are to be used for the corresponding BY group for the SOLVE task, then one of the two BY statements must appear after the SOLVE statement.

The following linear regression example illustrates the use of BY group processing. Both the datasets A and D to be used for fitting and solving, respectively, have three groups.

```
/*----- data set for fit task----- */
data a ;
  do group = 1 to 3 ;
    do i = 1 to 100 ;
      x = normal(1);
      y = 2 + 3*x + rannor(1) ;
```

```

        output ;
    end ;
end ;
run ;

/*----- data set for solve task----- */
data d ;
    do group = 1 to 3 ;
        x = normal(1) ;
        output ;
    end ;
run ;

/* ----- 2 BY statements, one of them appear after SOLVE statement ----- */
proc model data = a ;
    by group ;
    y = a0 + a1*x ;
    fit y / outest = b1 ;
    solve y / data = d estdata = b1 out = c1 ;
    by group ;
run;

proc print data = b1 ;run;
proc print data = c1 ; run;

```

Each of the parameter estimates obtained from the BY group processing in the FIT statement shown in Figure 19.14 is used in the corresponding BY group variables in the SOLVE statement. The output dataset is shown in Figure 19.15.

Figure 19.14 Listing of OUTEST= Data Set Created in the FIT Statement with Two BY Statements

Obs	group	_NAME_	_TYPE_	_STATUS_	_NUSED_	a0	a1
1	1		OLS	0 Converged	100	2.00338	3.00298
2	2		OLS	0 Converged	100	2.05091	3.08808
3	3		OLS	0 Converged	100	2.15528	3.04290

Figure 19.15 Listing of OUT= Data Set Created in the SOLVE Statement with Two BY Statements

Obs	group	_TYPE_	_MODE_	_ERRORS_	y	x
1	1	PREDICT	SIMULATE	0	7.42322	1.80482
2	2	PREDICT	SIMULATE	0	1.80413	-0.07992
3	3	PREDICT	SIMULATE	0	3.36202	0.39658

If only one BY statement is used and it appears before the SOLVE statement, then parameters for the last BY group in the OUTEST = data set are used for all BY groups for the SOLVE task.

```

/*----- 1 BY statement that appears before SOLVE statement----- */
proc model data = a ;
    by group ;

```

```

y = a0 + a1*x ;
fit y / outest = b2 ;
solve y / data = d estdata = b2 out = c2 ;
run;

proc print data = b2 ; run;
proc print data = c2 ; run;

```

The estimates of the parameters are shown in [Figure 19.16](#), and the output data set of the SOLVE statement is shown in [Figure 19.17](#). Hence, the estimates and the predicted values obtained in the last BY group variable of both DATA C1 and C2 are the same while the others do not match.

Figure 19.16 Listing of OUTEST= Data Set Created in the FIT Statement with One BY Statement That Appears before the SOLVE Statement

Obs	group	_NAME_	_TYPE_	_STATUS_	_NUSED_	a0	a1
1	1		OLS	0 Converged	100	2.00338	3.00298
2	2		OLS	0 Converged	100	2.05091	3.08808
3	3		OLS	0 Converged	100	2.15528	3.04290

Figure 19.17 Listing of OUT= Data Set Created in the SOLVE Statement with One BY Statement That Appears before the SOLVE Statement

Obs	_TYPE_	_MODE_	_ERRORS_	y	x
1	PREDICT	SIMULATE	0	7.64717	1.80482
2	PREDICT	SIMULATE	0	1.91211	-0.07992
3	PREDICT	SIMULATE	0	3.36202	0.39658

If only one BY statement is used and it appears after the SOLVE statement, then BY group processing does not apply to the FIT task. In this case, the OUTEST=data set does not contain the BY variable, and the single set of parameter estimates obtained from the FIT task are used for all BY groups during the SOLVE task.

```

/*----- 1 BY statement that appears after SOLVE statement-----*/
proc model data = a ;
  y = a0 + a1*x ;
  fit y / outest = b3 ;
  solve y / data = d estdata = b3 out = c3 ;
  by group ;
run;

proc print data = b3 ; run;
proc print data = c3 ; run;

```

The output data B3 and C3 are listed in [Figure 19.18](#) and [Figure 19.19](#), respectively.

Figure 19.18 Listing of OUTEST= Data Set Created in the FIT Statement with One BY Statement That Appears after the SOLVE Statement

Obs	_NAME_	_TYPE_	_STATUS_	_NUSED_	a0	a1
1		OLS	0 Converged	300	2.06624	3.04219

Figure 19.19 Listing of OUT= Data Set Created in the First SOLVE Statement with One BY Statement That Appears after the SOLVE Statement

Obs	group	_TYPE_	_MODE_	_ERRORS_	y	x
1	1	PREDICT	SIMULATE	0	7.55686	1.80482
2	2	PREDICT	SIMULATE	0	1.82312	-0.07992
3	3	PREDICT	SIMULATE	0	3.27270	0.39658

CONTROL Statement

CONTROL *variable* < *value* > ... ;

The CONTROL statement declares control variables and specifies their values. A control variable is like a parameter except that it has a fixed value and is not estimated from the data. You can use control variables for constants in model equations that you might want to change in different solution cases. You can use control variables to vary the program logic. Unlike the retained variables, these values are fixed across iterations.

DELETEMODEL Statement

DELETEMODEL *model* < MODNAME=*model-name* > ;

The DELETEMODEL statement deletes a model created using the OUTMODEL= option in a previous PROC MODEL execution. The *model* argument specifies the catalog or XML-based data set containing the model to be deleted, and the *model-name* argument specifies which model is to be deleted.

ENDOGENOUS Statement

ENDOGENOUS *variable* < *initial-values* > ... ;

The ENDOGENOUS statement declares model variables and identifies them as endogenous. You can declare model variables with an ENDOGENOUS statement instead of with a VAR statement to help document the model or to indicate the default solution variables. The variables declared endogenous are solved when

a SOLVE statement does not indicate which variables to solve. Valid abbreviations for the ENDOGENOUS statement are ENDOG and ENDO.

The DEPENDENT statement is equivalent to the ENDOGENOUS statement and is provided for the convenience of non-econometric practitioners.

The ENDOGENOUS statement optionally provides initial values for lagged dependent variables. See the section “Lag Logic” on page 1237 for more information.

ERRORMODEL Statement

ERRORMODEL *equation-name* ~ *distribution* < CDF= CDF(*options*) > ;

The ERRORMODEL statement is the mechanism for specifying the distribution of the residuals. You must specify the dependent/endogenous variables or general-form model name, a tilde (~), and then a distribution with its parameters. The following options are used in the ERRORMODEL statement:

Options to Specify the Distribution

CAUCHY(< *location*, *scale* >)

specifies the Cauchy distribution. This option is supported only for simulation. The arguments correspond to the arguments of the SAS CDF function which computes the cumulative distribution function (ignoring the random variable argument).

CHISQUARED (*df* < , *nc* >)

specifies the χ^2 distribution. This option is supported only for simulation. The arguments correspond to the arguments of the SAS CDF function (ignoring the random variable argument).

GENERAL(*Likelihood* < , *parm1*, *parm2*, . . . *parmn* >)

specifies the negative of a general log-likelihood function that you construct by using SAS programming statements. The procedure minimizes the negative log-likelihood function specified. *parm1*, *parm2*, . . . *parmn* are optional parameters for this distribution and are used for documentation purposes only.

F(*ndf*, *ddf* < , *nc* >)

specifies the *F* distribution. This option is supported only for simulation. The arguments correspond to the arguments of the SAS CDF function (ignoring the random variable argument).

NORMAL(*v*₁ *v*₂ . . . *v*_{*n*})

specifies a multivariate normal (Gaussian) distribution with mean 0 and variances *v*₁ through *v*_{*n*}.

POISSON(*mean*)

specifies the Poisson distribution. This option is supported only for simulation. The arguments correspond to the arguments of the SAS CDF function (ignoring the random variable argument).

T(*v*₁ *v*₂ . . . *v*_{*n*}, *df*)

specifies a multivariate *t* distribution with noncentrality 0, variance *v*₁ through *v*_{*n*}, and common degrees of freedom *df*.

UNIFORM(< left, right >)

specifies the uniform distribution. This option is supported only for simulation. The arguments correspond to the arguments of the SAS CDF function (ignoring the random variable argument).

Options to Specify the CDF for Simulation**CDF=(CDF(options))**

specifies the univariate distribution that is used for simulation so that the estimation can be done for one set of distributional assumptions and the simulation for another. The CDF can be any of the distributions from the previous section with the exception of the general likelihood. In addition, you can specify the empirical distribution of the residuals.

EMPIRICAL= (< TAILS=(options)>)

uses the sorted residual data to create an empirical CDF.

TAILS=(tail-options)

specifies how to handle the tails in computing the inverse CDF from an empirical distribution, where *tail-options* are:

NORMAL specifies the normal distribution to extrapolate the tails.

T(df) specifies the *t* distribution to extrapolate the tails.

PERCENT= *p* specifies the percentage of the observations to use in constructing each tail. The default for the PERCENT= option is 10. A normal distribution or a *t* distribution is used to extrapolate the tails to infinity. The variance for the tail distribution is obtained from the data so that the empirical CDF is continuous.

ESTIMATE Statement

ESTIMATE *item* < , *item* ... > < ,/ *options* > ;

The ESTIMATE statement computes estimates of functions of the parameters.

The ESTIMATE statement refers to the parameters estimated by the associated FIT statement (that is, to either the preceding FIT statement or, in the absence of a preceding FIT statement, to the following FIT statement). You can use any number of ESTIMATE statements.

Let $\mathbf{h}(\theta)$ denote the function of parameters that needs to be estimated. Let $\hat{\theta}$ denote the unconstrained estimate of the parameter of interest, θ . Let $\hat{\mathbf{V}}$ be the estimate of the covariance matrix of θ . Denote

$$\mathbf{A}(\theta) = \partial \mathbf{h}(\theta) / \partial \theta \big|_{\hat{\theta}}$$

Then the standard error of the parameter function estimate is computed by obtaining the square root of $\mathbf{A}(\hat{\theta}) \hat{\mathbf{V}} \mathbf{A}'(\hat{\theta})$. This is the same as the variance needed for a Wald type test statistic with null hypothesis $\mathbf{h}(\theta) = 0$.

If the expression of the function in the ESTIMATE statement includes a variable, then the value used in computing the function estimate is the last observation of the variable in the DATA= data set.

If you specify options on the ESTIMATE statement, a comma is required before the “/” character that separates the test expressions from the options, since the “/” character can also be used within test expressions to indicate division. Each *item* is written as an optional name followed by an expression,

< "name" > expression

where “name” is a string used to identify the estimate in the printed output and in the OUTEST= data set.

Expressions can be composed of parameter names, arithmetic operators, functions, and constants. Comparison operators (such as = or <) and logical operators (such as &) cannot be used in ESTIMATE statement expressions. Parameters named in ESTIMATE expressions must be among the parameters estimated by the associated FIT statement.

You can use the following options in the ESTIMATE statement:

OUTEST=

specifies the name of the data set in which the estimate of the functions of the parameters are to be written. The format for this data set is identical to the OUTEST= data set for the FIT statement.

If you specify a *name* in the ESTIMATE statement, that name is used as the parameter name for the estimate in the OUTEST= data set. If no *name* is provided and the expression is just a symbol, the symbol name is used; otherwise, the string “_Estimate #” is used, where “#” is the variable number in the OUTEST= data set.

OUTCOV

writes the covariance matrix of the functions of the parameters to the OUTEST= data set in addition to the parameter estimates.

COVB

prints the covariance matrix of the functions of the parameters.

CORRB

prints the correlation matrix of the functions of the parameters.

The following statements are an example of the use of the ESTIMATE statement in a segmented model and produce the output shown in [Figure 19.20](#):

```
data a;
  input y x @@;
datalines;
  .46 1  .47  2 .57  3 .61  4 .62  5 .68  6 .69  7
  .78 8  .70  9 .74 10 .77 11 .78 12 .74 13 .80 13
  .80 15 .78 16
;

title 'Segmented Model -- Quadratic with Plateau';
proc model data=a;

  x0 = -.5 * b / c;
```



```

if x < x0 then y = a + b*x + c*x*x;
else          y = a + b*x0 + c*x0*x0;

fit y start=( a .45 b .5 c -.0025 );

estimate 'Join point' x0 ,
         'plateau' a + b*x0 + c*x0**2 ;

run;

```

Figure 19.20 ESTIMATE Statement Output

Segmented Model -- Quadratic with Plateau					
The MODEL Procedure					
Nonlinear OLS Estimates					
Term	Estimate	Approx Std Err	t Value	Approx Pr > t	Label
Join point	12.7504	1.2785	9.97	<.0001	x0
plateau	0.777516	0.0123	63.10	<.0001	a + b*x0 + c*x0**2

EXOGENOUS Statement

EXOGENOUS *variable* < *initial-values* > ... ;

The EXOGENOUS statement declares model variables and identifies them as exogenous. You can declare model variables with an EXOGENOUS statement instead of with a VAR statement to help document the model or to indicate the default instrumental variables. The variables declared exogenous are used as instruments when an instrumental variables estimation method is requested (such as N2SLS or N3SLS) and an INSTRUMENTS statement is not used. Valid abbreviations for the EXOGENOUS statement are EXOG and EXO.

The INDEPENDENT statement is equivalent to the EXOGENOUS statement and is provided for the convenience of non-econometric practitioners.

The EXOGENOUS statement optionally provides initial values for lagged exogenous variables. See the section “Lag Logic” on page 1237 for more information.

FIT Statement

FIT < *equations* > < *PARMS*=(*parameter* < *values* > ...) > < *START*=(*parameter values* ...) > < *DROP*=(*parameter* ...) > < *INITIAL*=(*variable* < = *parameter* | *constant* > ...) > < / *options* > ;

The FIT statement estimates model parameters by fitting the model equations to input data and optionally selects the equations to be fit. If the list of equations is omitted, all model equations that contain parameters

are fitted.

The following options can be used in the FIT statement.

DROP= (*parameters* ...)

specifies that the named parameters not be estimated. All the parameters in the equations fit are estimated except those listed in the DROP= option. The dropped parameters retain their previous values and are not changed by the estimation.

INITIAL= (*variable* = < *parameter* / *constant* > ...)

associates a *variable* with an initial value as a *parameter* or a *constant*. This option applies only to ordinary differential equations. See the section “[Ordinary Differential Equations](#)” on page 1144 for more information.

PARMS= (*parameters* [*values*] ...)

selects a subset of the parameters for estimation. When the PARMS= option is used, only the named parameters are estimated. Any parameters not specified in the PARMS= list retain their previous values and are not changed by the estimation.

In PROC MODEL, you have several options to specify starting values for the parameters to be estimated. When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. If no options are specified for the starting value, the default value of 0.0001 is used.

PRL= WALD | LR | BOTH

requests confidence intervals on estimated parameters. By default, the PRL option produces 95% likelihood ratio confidence limits. The coverage of the confidence interval is controlled by the ALPHA= option in the FIT statement.

START= (*parameter values* ...)

supplies starting values for the parameter estimates. In PROC MODEL, you have several options to specify starting values for the parameters to be estimated. When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. If no options are specified for the starting value, the default value of 0.0001 is used. If the START= option specifies more than one starting value for one or more parameters, a grid search is performed over all combinations of the values, and the best combination is used to start the iterations. For more information, see the STARTITER= option.

Options to Control the Estimation Method Used

ADJSMMV

specifies adding the variance adjustment from simulating the moments to the variance-covariance matrix of the parameter estimators. By default, no adjustment is made.

COVBEST=GLS | CROSS | FDA

specifies the variance-covariance estimator used for FIML. COVBEST=GLS selects the generalized least squares estimator. COVBEST=CROSS selects the crossproducts estimator. COVBEST=FDA

selects the inverse of the finite difference approximation to the Hessian. The default is COVBEST=CROSS.

DYNAMIC

specifies dynamic estimation of ordinary differential equations. See the section “[Ordinary Differential Equations](#)” on page 1144 for more details.

FIML

specifies full information maximum likelihood estimation.

GINV=G2 | G4

specifies the type of generalized inverse to be used when computing the covariance matrix. G4 selects the Moore-Penrose generalized inverse. The default is GINV=G2.

Rather than deleting linearly related rows and columns of the covariance matrix, the Moore-Penrose generalized inverse averages the variance effects between collinear rows. When the option GINV=G4 is used, the Moore-Penrose generalized inverse is used to calculate standard errors and the covariance matrix of the parameters as well as the change vector for the optimization problem. For singular systems, a normal G2 inverse is used to determine the singular rows so that the parameters can be marked in the parameter estimates table. A G2 inverse is calculated by satisfying the first two properties of the Moore-Penrose generalized inverse; that is, $\mathbf{A}\mathbf{A}^+\mathbf{A} = \mathbf{A}$ and $\mathbf{A}^+\mathbf{A}\mathbf{A}^+ = \mathbf{A}^+$. Whether or not you use a G4 inverse, if the covariance matrix is singular, the parameter estimates are not unique. Refer to Noble and Daniel (1977, pp. 337–340) for more details about generalized inverses.

GENGMMV

specify GMM variance under arbitrary weighting matrix. See the section “[Estimation Methods](#)” on page 1086 for more details.

This is the default method for GMM estimation.

GMM

specifies generalized method of moments estimation.

HCCME= 0 | 1 | 2 | 3 | NO

specifies the type of heteroscedasticity-consistent covariance matrix estimator to use for OLS, 2SLS, 3SLS, SUR, and the iterated versions of these estimation methods. The number corresponds to the type of covariance matrix estimator to use as

$$\begin{aligned} HC_0 &: \hat{\epsilon}_t^2 \\ HC_1 &: \frac{n}{n-df} \hat{\epsilon}_t^2 \\ HC_2 &: \hat{\epsilon}_t^2 / (1 - \hat{h}_t) \\ HC_3 &: \hat{\epsilon}_t^2 / (1 - \hat{h}_t)^2 \end{aligned}$$

The default is NO.

ITGMM

specifies iterated generalized method of moments estimation.

ITOLS

specifies iterated ordinary least squares estimation. This is the same as OLS unless there are cross-equation parameter restrictions.

ITSUR

specifies iterated seemingly unrelated regression estimation

IT2SLS

specifies iterated two-stage least squares estimation. This is the same as 2SLS unless there are cross-equation parameter restrictions.

IT3SLS

specifies iterated three-stage least squares estimation.

KERNEL=(PARZEN | BART | QS, <c> , <e>)**KERNEL=PARZEN | BART | QS**

specifies the kernel to be used for GMM and ITGMM. PARZEN selects the Parzen kernel, BART selects the Bartlett kernel, and QS selects the quadratic spectral kernel. $e \geq 0$ and $c \geq 0$ are used to compute the bandwidth parameter. The default is **KERNEL=(PARZEN, 1, 0.2)**. See the section “[Estimation Methods](#)” on page 1086 for more details.

N2SLS | 2SLS

specifies nonlinear two-stage least squares estimation. This is the default when an **INSTRUMENTS** statement is used.

N3SLS | 3SLS

specifies nonlinear three-stage least squares estimation.

NDRAW <=number of draws>

requests the simulation method for estimation. H is the *number of draws*. If *number of draws* is not specified, the default H is set to 10.

NOOLS**NO2SLS**

specifies bypassing OLS or 2SLS to get initial parameter estimates for GMM, ITGMM, or FIML. This is important for certain models that are poorly defined in OLS or 2SLS, or if good initial parameter values are already provided. Note that for GMM, the **V** matrix is created by using the initial values specified and this might not be consistently estimated.

NO3SLS

specifies not to use 3SLS automatically for FIML initial parameter starting values.

NOGENGMMV

specifies not to use GMM variance under arbitrary weighting matrix. Use GMM variance under optimal weighting matrix instead. See the section “[Estimation Methods](#)” on page 1086 for more details.

NPREOBS = *number of obs to initialize*

specifies the initial number of observations to run the simulation before the simulated values are compared to observed variables. This option is most useful in cases where the program statements involve lag operations. Use this option to avoid the effect of the starting point on the simulation.

NVDRAW = *number of draws for V matrix*

specifies H' , the number of draws for V matrix. If this option is not specified, the default H' is set to 20.

OLS

specifies ordinary least squares estimation. This is the default.

SUR

specifies seemingly unrelated regression estimation.

VARDEF=N | WGT | DF | WDF

specifies the denominator to be used in computing variances and covariances, MSE, root MSE measures, and so on. VARDEF=N specifies that the number of nonmissing observations be used. VARDEF=WGT specifies that the sum of the weights be used. VARDEF=DF specifies that the number of nonmissing observations minus the model degrees of freedom (number of parameters) be used. VARDEF=WDF specifies that the sum of the weights minus the model degrees of freedom be used. The default is VARDEF=DF. For FIML estimation the VARDEF= option does not affect the calculation of the parameter covariance matrix, which is determined by the COVBEST= option.

Data Set Options**DATA=SAS-data-set**

specifies the input data set. Values for the variables in the program are read from this data set. If the DATA= option is not specified on the FIT statement, the data set specified by the DATA= option on the PROC MODEL statement is used.

ESTDATA=SAS-data-set

specifies a data set whose first observation provides initial values for some or all of the parameters.

MISSING=PAIRWISE | DELETE

specifies how missing values are handled. **MISSING=PAIRWISE** specifies that missing values are tracked on an equation-by-equation basis. **MISSING=DELETE** specifies that the entire observation is omitted from the analysis when any equation has a missing predicted or actual value for the equation. The default is **MISSING=DELETE**.

OUT=SAS-data-set

names the SAS data set to contain the residuals, predicted values, or actual values from each estimation. The residual values written to the **OUT=** data set are defined as the *actual – predicted*, which is the negative of **RESID.variable** as defined in the section “[Equation Translations](#)” on page 1232. Only the residuals are output by default.

OUTACTUAL

writes the actual values of the endogenous variables of the estimation to the **OUT=** data set. This option is applicable only if the **OUT=** option is specified.

OUTALL

selects the **OUTACTUAL**, **OUTERRORS**, **OUTLAGS**, **OUTPREDICT**, and **OUTRESID** options.

OUTCOV**COVOUT**

writes the covariance matrix of the estimates to the **OUTEST=** data set in addition to the parameter estimates. The **OUTCOV** option is applicable only if the **OUTEST=** option is also specified.

OUTEST=SAS-data-set

names the SAS data set to contain the parameter estimates and optionally the covariance of the estimates.

OUTLAGS

writes the observations used to start the lags to the **OUT=** data set. This option is applicable only if the **OUT=** option is specified.

OUTPREDICT

writes the predicted values to the **OUT=** data set. This option is applicable only if **OUT=** is specified.

OUTRESID

writes the residual values computed from the parameter estimates to the **OUT=** data set. The **OUTRESID** option is the default if neither **OUTPREDICT** nor **OUTACTUAL** is specified. This option is applicable only if the **OUT=** option is specified. If the **h.var** equation is specified, the residual values written to the **OUT=** data set are the normalized residuals, defined as *actual – predicted*, divided by the square root of the **h.var** value. If the **WEIGHT** statement is used, the residual values are calculated as *actual – predicted* multiplied by the square root of the **WEIGHT** variable.

OUTS=SAS-data-set

names the SAS data set to contain the estimated covariance matrix of the equation errors. This is the covariance of the residuals computed from the parameter estimates.

OUTSN=SAS-data-set

names the SAS data set to contain the estimated normalized covariance matrix of the equation errors. This is valid for multivariate *t* distribution estimation.

OUTSUSED=SAS-data-set

names the SAS data set to contain the **S** matrix used in the objective function definition. The OUTSUSED= data set is the same as the OUTS= data set for the methods that iterate the **S** matrix.

OUTUNWGTRESID

writes the unweighted residual values computed from the parameter estimates to the OUT= data set. These are residuals computed as *actual – predicted* with no accounting for the WEIGHT statement, the `_WEIGHT_` variable, or any variance expressions. This option is applicable only if the OUT= option is specified.

OUTV=SAS-data-set

names the SAS data set to contain the estimate of the variance matrix for GMM and ITGMM.

SDATA=SAS-data-set

specifies a data set that provides the covariance matrix of the equation errors. The matrix read from the SDATA= data set is used for the equation covariance matrix (**S** matrix) in the estimation. (The SDATA= **S** matrix is used to provide only the initial estimate of **S** for the methods that iterate the **S** matrix.)

TIME=name

specifies the name of the time variable. This variable must be in the data set.

TYPE=name

specifies the estimation type to read from the SDATA= and ESTDATA= data sets. The name specified in the TYPE= option is compared to the `_TYPE_` variable in the ESTDATA= and SDATA= data sets to select observations to use in constructing the covariance matrices. When the TYPE= option is omitted, the last estimation type in the data set is used. Valid values are the estimation methods used in PROC MODEL.

VDATA=SAS-data-set

specifies a data set that contains a variance matrix for GMM and ITGMM estimation. See the section “[Output Data Sets](#)” on page 1187 for details.

Printing Options for FIT Tasks

BREUSCH=(variable-list)

specifies the modified Breusch-Pagan test, where *variable-list* is a list of variables used to model the error variance.

CHOW=obs**CHOW=(obs1 obs2 ... obsn)**

prints the Chow test for break points or structural changes in a model. The argument is the number of observations in the first sample or a parenthesized list of first sample sizes. If the size of the one of the two groups in which the sample is partitioned is less than the number of parameters, then a [predictive Chow](#) test is automatically used. See the section “[Chow Tests](#)” on page 1159 for details.

COLLIN

prints collinearity diagnostics for the Jacobian crossproducts matrix (**XPX**) after the parameters have converged. Collinearity diagnostics are also automatically printed if the estimation fails to converge.

CORR

prints the correlation matrices of the residuals and parameters. Using CORR is the same as using both CORRB and CORRS.

CORRB

prints the correlation matrix of the parameter estimates.

CORRS

prints the correlation matrix of the residuals.

COV

prints the covariance matrices of the residuals and parameters. Specifying COV is the same as specifying both COVB and COVS.

COVB

prints the covariance matrix of the parameter estimates.

COVS

prints the covariance matrix of the residuals.

DW <=>

prints Durbin-Watson d statistics, which measure autocorrelation of the residuals. When the residual series is interrupted by missing observations, the Durbin-Watson statistic calculated is d' as suggested by Savin and White (1978). This is the usual Durbin-Watson computed by ignoring the gaps. Savin and White show that it has the same null distribution as the DW with no gaps in the series and can be used to test for autocorrelation using the standard tables. The Durbin-Watson statistic is not valid for models that contain lagged endogenous variables.

You can use the DW= option to request higher-order Durbin-Watson statistics. Since the ordinary Durbin-Watson statistic tests only for first-order autocorrelation, the Durbin-Watson statistics for higher-order autocorrelation are called *generalized Durbin-Watson* statistics.

DWPROB

prints the significance level (p -values) for the Durbin-Watson tests. Since the Durbin-Watson p -values are computationally expensive, they are not reported by default. In the Durbin-Watson test, the null hypothesis is that there is autocorrelation at a specific lag.

See the section “Generalized Durbin-Watson Tests” for limitations of the statistic in the Chapter 8, “The AUTOREG Procedure.”

FSRSQ

prints the first-stage R^2 statistics for instrumental estimation methods. These R^2 statistics measure the proportion of the variance retained when the Jacobian columns associated with the parameters are projected through the instruments space.

GODFREY**GODFREY= n**

performs Godfrey’s tests for autocorrelated residuals for each equation, where n is the maximum autoregressive order, and specifies that Godfrey’s tests be computed for lags 1 through n . The default number of lags is one.

HAUSMAN

performs Hausman's specification test, or m -statistics.

NORMAL

performs tests of normality of the model residuals.

PCHOW=obs**PCHOW=(obs1 obs2 ... obsn)**

prints the predictive Chow test for break points or structural changes in a model. The argument is the number of observations in the first sample or a parenthesized list of first sample sizes. See the section "[Chow Tests](#)" on page 1159 for details.

PRINTALL

specifies the printing options COLLIN, CORRB, CORRS, COVB, COVS, DETAILS, DW, and FSRSQ.

WHITE

specifies White's test.

Options to Control Iteration Output

Details of the output produced are discussed in the section "[Iteration History](#)" on page 1120.

I

prints the inverse of the crossproducts Jacobian matrix at each iteration.

ITALL

specifies all iteration printing-control options (I, ITDETAILS, ITPRINT, and XPX). ITALL also prints the crossproducts matrix (labeled CROSS), the parameter change vector, and the estimate of the cross-equation covariance of residuals matrix at each iteration.

ITDETAILS

prints a detailed iteration listing. This includes the ITPRINT information and additional statistics.

ITPRINT

prints the parameter estimates, objective function value, and convergence criteria at each iteration.

XPX

prints the crossproducts Jacobian matrix at each iteration.

Options to Control the Minimization Process

The following options can be helpful when you experience a convergence problem:

CONVERGE=value1**CONVERGE=(value1, value2)**

specifies the convergence criteria. The convergence measure must be less than *value1* before convergence is assumed. *value2* is the convergence criterion for the **S** and **V** matrices for **S** and **V** iterated

methods. *value2* defaults to *value1*. See the section “[Convergence Criteria](#)” on page 1107 for details. The default value is CONVERGE=0.001.

HESSIAN=CROSS | GLS | FDA

specifies the Hessian approximation used for FIML. HESSIAN=CROSS selects the crossproducts approximation to the Hessian, HESSIAN=GLS selects the generalized least squares approximation to the Hessian, and HESSIAN=FDA selects the finite difference approximation to the Hessian. HESSIAN=GLS is the default.

LTEBOUND=*n*

specifies the local truncation error bound for the integration. This option is ignored if no ordinary differential equations (ODEs) are specified.

EPSILON =*value*

specifies the tolerance value used to transform strict inequalities into inequalities when restrictions on parameters are imposed. By default, EPSILON=1E-8. See the section “[Restrictions and Bounds on Parameters](#)” on page 1154 for details.

MAXITER=*n*

specifies the maximum number of iterations allowed. The default is MAXITER=100.

MAXSUBITER=*n*

specifies the maximum number of subiterations allowed for an iteration. For the GAUSS method, the MAXSUBITER= option limits the number of step halvings. For the MARQUARDT method, the MAXSUBITER= option limits the number of times λ can be increased. The default is MAXSUBITER=30. See the section “[Minimization Methods](#)” on page 1106 for details.

METHOD=GAUSS | MARQUARDT

specifies the iterative minimization method to use. METHOD=GAUSS specifies the Gauss-Newton method, and METHOD=MARQUARDT specifies the Marquardt-Levenberg method. The default is METHOD=GAUSS. If the default GAUSS method fails to converge, the procedure switches to the MARQUARDT method. See the section “[Minimization Methods](#)” on page 1106 for details.

MINTIMESTEP=*n*

specifies the smallest allowed time step to be used in the integration. This option is ignored if no ODEs are specified.

NESTIT

changes the way the iterations are performed for estimation methods that iterate the estimate of the equation covariance (**S** matrix). The NESTIT option is relevant only for the methods that iterate the estimate of the covariance matrix (ITGMM, ITOLS, ITSUR, IT2SLS, and IT3SLS). See the section “[Details on the Covariance of Equation Errors](#)” on page 1105 for an explanation of NESTIT.

SINGULAR=*value*

specifies the smallest pivot value allowed. The default 1.0E-12.

STARTITER=*n*

specifies the number of minimization iterations to perform at each grid point. The default is STARTITER=0, which implies that no minimization is performed at the grid points. See the section “[Using the STARTITER Option](#)” on page 1114 for more details.

Other Options

Other options that can be used on the FIT statement include the following that list and analyze the model: BLOCK, GRAPH, LIST, LISTCODE, LISTDEP, LISTDER, and XREF. The following printing control options are also available: DETAILS, FLOW, INTGPRINT, MAXERRORS=, NOPRINT, PRINTALL, and TRACE. For complete descriptions of these options, see the discussion of the PROC MODEL statement options earlier in this chapter.

ID Statement

ID *variables* ;

The ID statement specifies variables to identify observations in error messages or other listings and in the OUT= data set. The ID variables are normally SAS date or datetime variables. If more than one ID variable is used, the first variable is used to identify the observations; the remaining variables are added to the OUT= data set.

INCLUDE Statement

INCLUDE *model-names* ... ;

The INCLUDE statement reads model files and inserts their contents into the current model. However, instead of replacing the current model as the RESET MODEL= option does, the contents of included model files are inserted into the model program at the position that the INCLUDE statement appears.

INSTRUMENTS Statement

INSTRUMENTS *variables* < _EXOG_ > ;

INSTRUMENTS < *variables-list* > < _EXOG_ > < EXCLUDE =(*parameters*) > < / *options* > ;

INSTRUMENTS (*equation, variables*) (*equation, variables*) ... ;

The INSTRUMENTS statement specifies the instrumental variables to be used in the N2SLS, N3SLS, IT2SLS, IT3SLS, GMM, and ITGMM estimation methods.

There are three ways of specifying the INSTRUMENTS statement. The first form of the INSTRUMENTS statement is declared before a FIT statement and defines the default instruments list. The items specified as instruments can be variables or the special keyword _EXOG_. The keyword _EXOG_ indicates that all the model variables declared EXOGENOUS are to be added to the instruments list. If a single INSTRUMENTS statement of the first form is declared before multiple FIT statements, then it serves as the default instruments list for each of the FIT statements. However, if any of these FIT statements are followed by separate

INSTRUMENTS statement, then the latter take precedence over the default list. Hence, in the case of multiple FIT statements, the INSTRUMENTS statement for a particular FIT statement is written below the FIT statement if instruments other than the default are required. For a single FIT statement, you can declare the INSTRUMENTS statement of the first form either preceding or following the FIT statement.

The second form of the INSTRUMENTS statement is used only after the FIT statement and before the next RUN statement. The items specified as instruments for the second form can be variables, names of parameters to be estimated, or the special keyword `_EXOG_`. If you specify the name of a parameter in the instruments list, the partial derivatives of the equations with respect to the parameter (that is, the columns of the Jacobian matrix associated with the parameter) are used as instruments. The parameter itself is not used as an instrument. These partial derivatives should not depend on any of the parameters to be estimated. Only the names of parameters to be estimated can be specified.

Note that an INSTRUMENTS statement of only the first form declared before multiple FIT statements serves as the default instruments list. Hence, in the cases of multiple as well as single FIT statements, you can declare the second form of INSTRUMENTS statements only following the FIT statements.

In the case where a FIT statement is preceded by an INSTRUMENTS statement of the second form in error and not followed by any INSTRUMENTS statement, then the default list is used. This default list is given by the INSTRUMENTS statement of the first form as explained above. If such a list is not declared, all the model variables declared EXOGENOUS comprise the default.

A third form of the INSTRUMENTS statement is used to specify instruments for each equation. No explicit intercept is added, parameters cannot be specified to represent instruments, and the `_EXOG_` keyword is not allowed. Equations not explicitly assigned instruments use all the instruments specified for the other equations as well as instruments not assigned specific equations. In the following statements, `z1`, `z2`, and `z3` are instruments used with equation `y1`, and `z2`, `z3`, and `z4` are instruments used with equation `y2`.

```
proc model data=data_sim;
  exogenous x1 x2;
  parms a b c d e f;

  y1 =a*x1**2 + b*x2**2 + c*x1*x2    ;
  y2 =d*x1**2 + e*x2**2 + f*x1*x2**2;

  fit y1 y2 / 3s1s ;
  instruments (y1, z1 z2 z3) (y2,z2 z3 z4);
run;
```

EXCLUDE=(parameters)

specifies that the derivatives of the equations with respect to all of the parameters to be estimated (except the parameters listed in the EXCLUDE list) be used as instruments, in addition to the other instruments specified. If you use the EXCLUDE= option, you should be sure that the derivatives with respect to the nonexcluded parameters in the estimation are independent of the endogenous variables and not functions of the parameters estimated.

The following options can be specified on the INSTRUMENTS statement following a slash (/):

NOINTERCEPT

NOINT

excludes the constant of 1.0 (intercept) from the instruments list. An intercept is included as an instru-

ment while using the first or second form of the INSTRUMENTS statement unless NOINTERCEPT is specified.

When a FIT statement specifies an instrumental variables estimation method and no INSTRUMENTS statement accompanies the FIT statement, the default instruments are used. If no default instruments list has been specified, all the model variables declared EXOGENOUS are used as instruments. See the section “[Choice of Instruments](#)” on page 1162 for more details.

INTONLY

specifies that only the intercept be used as an instrument. This option is used for GMM estimation where the moments have been specified explicitly.

LABEL Statement

LABEL *variable*='label' ... ;

The LABEL statement specifies a label of up to 255 characters for parameters and other variables used in the model program. Labels are used to identify parts of the printout of FIT and SOLVE tasks. The labels are displayed in the output if the LINESIZE= option is large enough.

MOMENT Statement

MOMENT *variables* = *moment specification* ;

In many scenarios, endogenous variables are observed from data. From the models, you can simulate these endogenous variables based on a fixed set of parameters. The goal of simulated method of moments (SMM) is to find a set of parameters such that the moments of the simulated data match the moments of the observed variables. If there are many moments to match, the code might be tedious. The following MOMENT statement provides a way to generate some commonly used moments automatically. Multiple MOMENT statements can be used.

variables can be one or more endogenous variables.

moment specification can have the following four types:

- (*number list*) specifies that the endogenous variable is raised to the power specified by each number in *number list*. For example,

```
moment y = (2 3) ;
```

adds the following two equations to be estimated:

```
eq._moment_1 = y**2 - pred.y**2;
eq._moment_2 = y**3 - pred.y**3;
```

- `ABS(number list)` specifies that the absolute value of the endogenous variable is raised to the power specified by each number in *number list*. For example,

```
moment y = ABS(3);
```

adds the following equation to be estimated:

```
eq._moment_2 = abs(y)**3 - abs(pred.y)**3;
```

- `LAGnum (number list)` specifies that the endogenous variable is multiplied by the *num* th lag of the endogenous variable, and this product is raised to the power specified by each number in *number list*. For example,

```
moment y = LAG4(3);
```

adds the following equation to be estimated:

```
eq._moment_3 = (y*lag4(y))**3 - (pred.y*lag4(pred.y))**3;
```

- `ABS_LAGnum (number list)` specifies that the endogenous variable is multiplied by the *num* th lag of the endogenous variable, and the absolute value of this product is raised to the power specified by each number in *number list*. For example,

```
moment y = ABS_LAG4(3);
```

adds the following equation to be estimated:

```
eq._moment_4 = abs(y*lag4(y))**3 - abs(pred.y*lag4(pred.y))**3;
```

The following PROC MODEL statements use the MOMENT statement to generate 24 moments and fit these moments using SMM.

```
proc model data=tmpdata list;
  parms a b .5 s 1;
  instrument _exog_ / intonly;

  u = rannor( 10091 );
  z = rannor( 97631 );

  lsigmasq = xlag(sigmasq,exp(a));

  lnsigmasq = a + b * log(lsigmasq) + s * u;
  sigmasq = exp( lnsigmasq );

  y = sqrt(sigmasq) * z;

  moment y = (2 4) abs(1 3) abs_lag1(1 2) abs_lag2(1 2);
  moment y = abs_lag3(1 2) abs_lag4(1 2)
              abs_lag5(1 2) abs_lag6(1 2)
              abs_lag7(1 2) abs_lag8(1 2)
```

```

      abs_lag9(1 2) abs_lag10(1 2);

fit y / gmm npreobs=20 ndraw=10;
bound s > 0, 1>b>0;

run;

```

OUTVARS Statement

OUTVARS *variables* ;

The OUTVARS statement specifies additional variables defined in the model program to be output to the OUT= data sets. The OUTVARS statement is not needed unless the variables to be added to the output data set are not referred to by the model, or unless you want to include parameters or other special variables in the OUT= data set. The OUTVARS statement includes additional variables, whereas the KEEP statement excludes variables.

PARAMETERS Statement

PARAMETERS *variable < value> < variable < value>> ...* ;

The PARAMETERS statement declares the parameters of a model and optionally sets their initial values. Valid abbreviations are PARMS and PARM.

Each parameter has a single value associated with it, which is the same for all observations. Lagging is not relevant for parameters. If a value is not specified in the PARMS statement (or by the PARMS= option of a FIT statement), the value defaults to 0.0001 for FIT tasks and to a missing value for SOLVE tasks.

Programming Statements

To define the model, you can use most of the programming statements that are allowed in the SAS DATA step. See the *SAS Language Reference: Dictionary* for more information.

RANGE Statement

RANGE *variable < = first > < TO last >* ;

The RANGE statement specifies the range of observations to be read from the DATA= data set. For FIT tasks, the RANGE statement controls the period of fit for the estimation. For SOLVE tasks, the RANGE statement controls the simulation period or forecast horizon.

The RANGE variable must be a numeric variable in the DATA= data set that identifies the observations, and the data set must be sorted by the RANGE variable. The first observation in the range is identified by *first*, and the last observation is identified by *last*.

PROC MODEL uses the first *l* observations prior to *first* to initialize the lags, where *l* is the maximum number of lags needed to evaluate any of the equations to be fit or solved, or the maximum number of lags needed to compute any of the instruments when an instrumental variables estimation method is used. There should be at least *l* observations in the data set before *first*. If *last* is not specified, all the nonmissing observations starting with *first* are used.

If *first* is omitted, the first *l* observations are used to initialize the lags, and the rest of the data, until *last*, is used. If a RANGE statement is used but both *first* and *last* are omitted, the RANGE statement variable is used to report the range of observations processed.

The RANGE variable should be nonmissing for all observations. Observations that contain missing RANGE values are deleted.

The following are examples of RANGE statements:

```
range year = 1971 to 1988;           /* yearly data */
range date = '1feb73'd to '1nov82'd; /* monthly data */
range time = 60.5;                  /* time in years */
range year to 1977;                 /* use all years through 1977 */
range date; /* use values of date to report period-of-fit */
```

If no RANGE statements follow multiple FIT statements and a single RANGE statement is declared before all the FIT statements, estimation in each of the multiple FIT statements is based on the data specified in the single RANGE statement. A single RANGE statement following multiple FIT statements affects only the fit immediately preceding it.

If the FIT statement is both followed by and preceded by RANGE statements, the following RANGE statement takes precedence over the preceding RANGE statement.

In the case where a range of data is to be used for a particular SOLVE task, the RANGE statement should be specified following the SOLVE statement in the case of either single or multiple SOLVE statements.

RESET Statement

RESET options ;

All of the options of the PROC MODEL statement can be reset by the RESET statement. In addition, the RESET statement supports one additional option:

PURGE

deletes the current model so that a new model can be defined.

When the MODEL= option is used in the RESET statement, the current model is deleted before the new model is read.

RESTRICT Statement

RESTRICT *restriction1* < , *restriction2* ... > ;

The RESTRICT statement is used to impose linear and nonlinear restrictions on the parameter estimates.

RESTRICT statements refer to the parameters estimated by the associated FIT statement (that is, to either the preceding FIT statement or, in the absence of a preceding FIT statement, to the following FIT statement). You can specify any number of RESTRICT statements.

Each *restriction* is written as an optional name, followed by an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

< "name" > expression operator expression

The optional *"name"* is a string used to identify the restriction in the printed output and in the OUTEST= data set. The *operator* can be =, <, >, <=, or >=. The operator and second expression are optional.

Restriction expressions can be composed of parameter names, arithmetic operators, functions, and constants. Comparison operators (such as = or <) and logical operators (such as &) cannot be used in RESTRICT statement expressions. Parameters named in restriction expressions must be among the parameters estimated by the associated FIT statement. Expressions can refer to variables defined in the program.

The restriction expressions can be linear or nonlinear functions of the parameters.

The following is an example of the use of the RESTRICT statement:

```
proc model data=one;
  endogenous y1 y2;
  exogenous x1 x2;
  parms a b c;
  restrict b*(b+c) <= a;

  eq.one = -y1/c + a/x2 + b * x1**2 + c * x2**2;
  eq.two = -y2 * y1 + b * x2**2 - c/(2 * x1);

  fit one two / fml;
run;
```

SOLVE Statement

SOLVE *variables* < SATISFY= *equations* > < /options > ;

The SOLVE statement specifies that the model be simulated or forecast for input data values and, optionally, selects the variables to be solved. If the list of variables is omitted, all of the model variables declared ENDOGENOUS are solved. If no model variables are declared ENDOGENOUS, then all model variables are solved.

The following specification can be used in the SOLVE statement:

SATISFY=equation**SATISFY=(equations)**

specifies a subset of the model equations that the solution values are to satisfy. If the SATISFY= option is not used, the solution is computed to satisfy all the model equations. Note that the number of equations must equal the number of variables solved.

Data Set Options

DATA=SAS-data-set

names the input data set. The model is solved for each observation read from the DATA= data set. If the DATA= option is not specified on the SOLVE statement, the data set specified by the DATA= option in the PROC MODEL statement is used.

ESTDATA=SAS-data-set

names a data set whose first observation provides values for some or all of the parameters and whose additional observations (if any) give the covariance matrix of the parameter estimates. The covariance matrix read from the ESTDATA= data set is used to generate multivariate normal pseudo-random shocks to the model parameters when the RANDOM= option requests Monte Carlo simulation.

OUT=SAS-data-set

outputs the predicted (solution) values, residual values, actual values, or equation errors from the solution to a data set. The residual values are the *actual – predicted* values, which is the negative of RESID.variable as defined in the section “[Equation Translations](#)” on page 1232. Only the solution values are output by default.

OUTACTUAL

outputs the actual values of the solved variables read from the input data set to the OUT= data set. This option is applicable only if the OUT= option is specified.

OUTALL

specifies the OUTACTUAL, OUTERRORS, OUTLAGS, OUTPREDICT, and OUTRESID options.

OUTERRORS

writes the equation errors to the OUT= data set. These values are normally very close to zero when a simultaneous solution is computed; they can be used to double-check the accuracy of the solution process. It is applicable only if the OUT= option is specified.

OUTLAGS

writes the observations used to start the lags to the OUT= data set. This option is applicable only if the OUT= option is specified.

OUTPREDICT

writes the solution values to the OUT= data set. This option is relevant only if the OUT= option is specified.

The OUTPREDICT option is the default unless one of the other output options is used.

OUTRESID

writes the residual values computed as the *actual – predicted* values and is not the same as the RESID.variable values. This option is applicable only if the OUT= option is specified.

PARMSDATA=SAS-data-set

specifies a data set that contains the parameter estimates. See the section “[Input Data Sets](#)” on page 1182 for more details.

RESIDDATA=SAS-data-set

specifies a data set that contains the residuals that are to be used in the empirical distribution. This data set can be created using the OUT= option on the FIT statement.

SDATA=SAS-data-set

specifies a data set that provides the covariance matrix of the equation errors. The covariance matrix read from the SDATA= data set is used to generate multivariate normal pseudo-random shocks to the equations when the RANDOM= option requests Monte Carlo simulation.

TIME=name

specifies the name of the time variable. This variable must be in the data set.

TYPE=name

specifies the estimation type. The name specified in the TYPE= option is compared to the _TYPE_ variable in the ESTDATA= and SDATA= data sets to select observations to use in constructing the covariance matrices. When TYPE= is omitted, the last estimation type in the data set is used.

Solution Mode Options: Lag Processing

DYNAMIC

specifies a dynamic solution. In the dynamic solution mode, solved values are used by the lagging functions. DYNAMIC is the default.

NAHEAD=n

specifies a simulation of n -period-ahead dynamic forecasting. The NAHEAD= option is used to simulate the process of using the model to produce successive forecasts to a fixed forecast horizon, in which each forecast uses the historical data available at the time the forecast is made.

Note that NAHEAD=1 produces a static (one-step-ahead) solution. NAHEAD=2 produces a solution that uses one-step-ahead solutions for the first lag (LAG1 functions return static predicted values) and actual values for longer lags. NAHEAD=3 produces a solution that uses NAHEAD=2 solutions for the first lags, NAHEAD=1 solutions for the second lags, and actual values for longer lags. In general, NAHEAD= n solutions use NAHEAD= $n-1$ solutions for LAG1, NAHEAD= $n-2$ solutions for LAG2, and so forth.

START=s

specifies static solutions until the s th observation and then changes to dynamic solutions. If the START= s option is specified, the first observation in the range in which LAG n delivers solved predicted values is $s+n$, while LAG n returns actual values for earlier observations.

STATIC

specifies a static solution. In static solution mode, actual values of the solved variables from the input data set are used by the lagging functions.

Solution Mode Options: Use of Available Data

FORECAST

specifies that the actual value of a solved variable is used as the solution value (instead of the predicted value from the model equations) whenever nonmissing data are available in the input data set. That is, in FORECAST mode, PROC MODEL solves only for those variables that are missing in the input data set.

SIMULATE

specifies that PROC MODEL always solves for all solution variables as a function of the input values of the other variables, even when actual data for some of the solution variables are available in the input data set. SIMULATE is the default.

Solution Mode Options: Numerical Solution Method

JACOBI

computes a simultaneous solution using a Jacobi iteration.

NEWTON

computes a simultaneous solution by using Newton's method. When the NEWTON option is selected, the analytic derivatives of the equation errors with respect to the solution variables are computed, and memory-efficient sparse matrix techniques are used for factoring the Jacobian matrix.

The NEWTON option can be used to solve both normalized-form and general-form equations and can compute goal-seeking solutions. NEWTON is the default.

SEIDEL

computes a simultaneous solution by using a Gauss-Seidel method.

SINGLE

ONEPASS

specifies a single-equation (nonsimultaneous) solution. The model is executed once to compute predicted values for the variables from the actual values of the other endogenous variables. The SINGLE option can be used only for normalized-form equations and cannot be used for goal-seeking solutions.

For more information on these options, see the section “[Solution Modes](#)” on page 1194.

Monte Carlo Simulation Options

COPULA=(NORMAL | NORMALMIX(n , $p_1 \dots p_n$, $v_1 \dots v_n$) | T(df) < ASYM >)

specifies copula to be used in the simulation. The normal (Gaussian) copula is the default. The copula applies to covariance of equation errors.

PSEUDO=DEFAULT | TWISTER

specifies which pseudo-number generator is to be used in generating draws for Monte Carlo simulation. The two pseudo-random number generators supported by the MODEL procedure are a default congruential generator which has period $2^{31} - 1$ and Mersenne-Twister pseudo-random number generator which has an extraordinarily long period $2^{19937} - 1$.

QUASI=NONE|SOBOL|FAURE

specifies a pseudo- or quasi-random number generator. Two quasi-random number generators are supported by the MODEL procedure: the Sobol sequence (QUASI=SOBOL) and the Faure sequence (QUASI=FAURE). The default is QUASI=NONE, which is the pseudo-random number generator.

RANDOM=*n*

repeats the solution *n* times for each BY group, with different random perturbations of the equation errors if the SDATA= option is used; with different random perturbations of the parameters if the ESTDATA= option is used and the ESTDATA= data set contains a parameter covariance matrix; and with different values returned from the random number generator functions, if any are used in the model program. If RANDOM=0, the random number generator functions always return zero. See the section “[Monte Carlo Simulation](#)” on page 1197 for details. The default is RANDOM=0.

SEED=*n*

specifies an integer to use as the seed in generating pseudo-random numbers to shock the parameters and equations when the ESTDATA= or the SDATA= options are specified. If *n* is negative or zero, the time of day from the computer’s clock is used as the seed. The SEED= option is relevant only if the RANDOM= option is used. The default is SEED=0.

WISHART=*df*

specifies that a Wishart distribution with degrees of freedom *df* be used in place of the normal error covariance matrix. This option is used to model the variance of the error covariance matrix when Monte Carlo simulation is selected.

Options for Controlling the Numerical Solution Process

The following options are useful when you have difficulty converging to the simultaneous solution.

CONVERGE=*value*

specifies the convergence criterion for the simultaneous solution. Convergence of the solution is judged by comparing the CONVERGE= value to the maximum over the equations of

$$\frac{|\epsilon_i|}{|y_i| + 1E - 6}$$

if they are computable, otherwise

$$|\epsilon_i|$$

where ϵ_i represents the equation error and y_i represents the solution variable that corresponds to the *i*th equation for normalized-form equations. The default is CONVERGE=1E–8.

MAXITER=*n*

specifies the maximum number of iterations allowed for computing the simultaneous solution for any observation. The default is MAXITER=50.

MAXSUBITER=*n*

specifies the maximum number of damping subiterations that are performed in solving a nonlinear system when using the NEWTON solution method. Damping is disabled by setting MAXSUBITER=0. The default is MAXSUBITER=10.

Printing Options

INTGPRINT

prints between data points integration values for the DERT. variables and the auxiliary variables. If you specify the DETAILS option, the integrated derivative variables are printed as well.

ITPRINT

prints the solution approximation and equation errors at each iteration for each observation. This option can produce voluminous output.

PRINTALL

specifies the printing control options DETAILS, ITPRINT, SOLVEPRINT, STATS, and THEIL.

SOLVEPRINT

prints the solution values and residuals at each observation.

STATS

prints various summary statistics for the solution values.

THEIL

prints tables of Theil inequality coefficients and Theil relative change forecast error measures for the solution values. See the section “[Summary Statistics](#)” on page 1212 for more information.

Other Options

Other options that can be used on the SOLVE statement include the following that list and analyze the model: BLOCK, GRAPH, LIST, LISTCODE, LISTDEP, LISTDER, and XREF. The LTEBOUND= and MINTIMESTEP= options can be used to control the integration process. The following printing-control options are also available: DETAILS, FLOW, MAXERRORS=, NOPRINT, and TRACE. For complete descriptions of these options, see the PROC MODEL and FIT statement options described earlier in this chapter.

TEST Statement

```
TEST < "name"> test1 < , test2 ... > < ,/ options > ;
```

The TEST statement performs tests of nonlinear hypotheses on the model parameters.

The TEST statement applies to the parameters estimated by the associated FIT statement (that is, either the preceding FIT statement or, in the absence of a preceding FIT statement, the following FIT statement). You can specify any number of TEST statements.

If you specify options on the TEST statement, a comma is required before the “/” character that separates the test expressions from the options, because the “/” character can also be used within test expressions to indicate division.

The label lengths for tests and estimate statements are 256 characters. If the labels exceed this length, the label is truncated to 256 characters with a note printed to the log.

Each test is written as an expression optionally followed by an equal sign (=) and a second expression:

< expression > <= expression >

Test expressions can be composed of parameter names, arithmetic operators, functions, and constants. Comparison operators (such as =) and logical operators (such as &) cannot be used in TEST statement expressions. Parameters named in test expressions must be among the parameters estimated by the associated FIT statement.

If you specify only one expression in a test, that expression is tested against zero. For example, the following two TEST statements are equivalent:

```
test a + b;

test a + b = 0;
```

When you specify multiple tests in the same TEST statement, a joint test is performed. For example, the following TEST statement tests the joint hypothesis that both A and B are equal to zero.

```
test a, b;
```

To perform separate tests rather than a joint test, use separate TEST statements. For example, the following TEST statements test the two separate hypotheses that A is equal to zero and that B is equal to zero.

```
test a;
test b;
```

You can use the following options in the TEST statement.

WALD

specifies that a Wald test be computed. WALD is the default.

LM

RAO

LAGRANGE

specifies that a Lagrange multiplier test be computed.

LR

LIKE

specifies that a likelihood ratio test be computed.

ALL

requests all three types of tests.

OUT=SAS-data-set

specifies the name of an output SAS data set that contains the test results. The format of the OUT= data set produced by the TEST statement is similar to that of the OUTEST= data set produced by the FIT statement.

VAR Statement

VAR *variables* < *initial-values* > ... ;

The VAR statement declares model variables and optionally provides initial values for the lags of the variables. See the section “[Lag Logic](#)” on page 1237 for more information.

WEIGHT Statement

WEIGHT *variable* ;

The WEIGHT statement specifies a variable to supply weighting values to use for each observation in estimating parameters.

If the weight of an observation is nonpositive, that observation is not used for the estimation. *variable* must be a numeric variable in the input data set.

An alternative weighting method is to use an assignment statement to give values to the special variable `_WEIGHT_`. The `_WEIGHT_` variable must not depend on the parameters being estimated. If both weighting specifications are given, the weights are multiplied together.

Details: Estimation by the MODEL Procedure

Estimation Methods

Consider the general nonlinear model:

$$\begin{aligned}\epsilon_t &= \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \\ \mathbf{z}_t &= \mathbf{Z}(\mathbf{x}_t)\end{aligned}$$

where $\mathbf{q} \in R^g$ is a real vector valued function of $\mathbf{y}_t \in R^g$, $\mathbf{x}_t \in R^l$, $\boldsymbol{\theta} \in R^p$, where g is the number of equations, l is the number of exogenous variables (lagged endogenous variables are considered exogenous here), p is the number of parameters, and t ranges from 1 to n . $\mathbf{z}_t \in R^k$ is a vector of instruments. ϵ_t is an unobservable

disturbance vector with the following properties:

$$\begin{aligned} E(\epsilon_t) &= 0 \\ E(\epsilon_t \epsilon_t') &= \Sigma \end{aligned}$$

All of the methods implemented in PROC MODEL aim to minimize an *objective function*. The following table summarizes the objective functions that define the estimators and the corresponding estimator of the covariance of the parameter estimates for each method.

Table 19.2 Summary of PROC MODEL Estimation Methods

Method	Instruments	Objective Function	Covariance of θ
OLS	no	$\mathbf{r}'\mathbf{r}/n$	$(\mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{I})\mathbf{X})^{-1}$
ITOLS	no	$\mathbf{r}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{I})\mathbf{r}/n$	$(\mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{I})\mathbf{X})^{-1}$
SUR	no	$\mathbf{r}'(\mathbf{S}_{\text{OLS}}^{-1} \otimes \mathbf{I})\mathbf{r}/n$	$(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{I})\mathbf{X})^{-1}$
ITSUR	no	$\mathbf{r}'(\mathbf{S}^{-1} \otimes \mathbf{I})\mathbf{r}/n$	$(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{I})\mathbf{X})^{-1}$
N2SLS	yes	$\mathbf{r}'(\mathbf{I} \otimes \mathbf{W})\mathbf{r}/n$	$(\mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{W})\mathbf{X})^{-1}$
IT2SLS	yes	$\mathbf{r}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{W})\mathbf{r}/n$	$(\mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{W})\mathbf{X})^{-1}$
N3SLS	yes	$\mathbf{r}'(\mathbf{S}_{\text{N2SLS}}^{-1} \otimes \mathbf{W})\mathbf{r}/n$	$(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{X})^{-1}$
IT3SLS	yes	$\mathbf{r}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{r}/n$	$(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{X})^{-1}$
GMM	yes	$[n\mathbf{m}_n(\theta)]'\hat{\mathbf{V}}_{\text{N2SLS}}^{-1}[n\mathbf{m}_n(\theta)]/n$	$[(\mathbf{YX})'\hat{\mathbf{V}}^{-1}(\mathbf{YX})]^{-1}$
ITGMM	yes	$[n\mathbf{m}_n(\theta)]'\hat{\mathbf{V}}^{-1}[n\mathbf{m}_n(\theta)]/n$	$[(\mathbf{YX})'\hat{\mathbf{V}}^{-1}(\mathbf{YX})]^{-1}$
FIML	no	$\text{constant} + \frac{n}{2}\ln(\det(\mathbf{S})) - \sum_1^n \ln (\mathbf{J}_t) $	$[\hat{\mathbf{Z}}'(\mathbf{S}^{-1} \otimes \mathbf{I})\hat{\mathbf{Z}}]^{-1}$

The column labeled “Instruments” identifies the estimation methods that require instruments. The variables used in this table and the remainder of this chapter are defined as follows:

n = is the number of nonmissing observations.

g = is the number of equations.

k = is the number of instrumental variables.

$\mathbf{r} = \begin{bmatrix} r_1 \\ r_2 \\ \vdots \\ r_g \end{bmatrix}$ is the $ng \times 1$ vector of residuals for the g equations stacked together.

$\mathbf{r}_i = \begin{bmatrix} q_i(\mathbf{y}_1, \mathbf{x}_1, \boldsymbol{\theta}) \\ q_i(\mathbf{y}_2, \mathbf{x}_2, \boldsymbol{\theta}) \\ \vdots \\ q_i(\mathbf{y}_n, \mathbf{x}_n, \boldsymbol{\theta}) \end{bmatrix}$ is the $n \times 1$ column vector of residuals for the i th equation.

\mathbf{S} is a $g \times g$ matrix that estimates Σ , the covariances of the errors across equations (referred to as the \mathbf{S} matrix).

\mathbf{X} is an $ng \times p$ matrix of partial derivatives of the residual with respect to the parameters.

\mathbf{W} is an $n \times n$ matrix, $\mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{Z}'$.

\mathbf{Z}	is an $n \times k$ matrix of instruments.
\mathbf{Y}	is a $gk \times ng$ matrix of instruments. $\mathbf{Y} = \mathbf{I}_g \otimes \mathbf{Z}'$.
$\hat{\mathbf{Z}}$	$\hat{\mathbf{Z}} = (\hat{\mathbf{Z}}_1, \hat{\mathbf{Z}}_2, \dots, \hat{\mathbf{Z}}_p)$ is an $ng \times p$ matrix. $\hat{\mathbf{Z}}_i$ is a $ng \times 1$ column vector obtained from stacking the columns of
	$\mathbf{U} \frac{1}{n} \sum_{t=1}^n \left(\frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'}{\partial \mathbf{y}_t} \right)^{-1} \frac{\partial^2 \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'}{\partial \mathbf{y}_t \partial \theta_i} - \mathbf{Q}_i$
\mathbf{U}	is an $n \times g$ matrix of residual errors. $\mathbf{U} = \boldsymbol{\epsilon}_1, \boldsymbol{\epsilon}_2, \dots, \boldsymbol{\epsilon}_n'$.
\mathbf{Q}	is the $n \times g$ matrix $\mathbf{q}(\mathbf{y}_1, \mathbf{x}_1, \boldsymbol{\theta}), \mathbf{q}(\mathbf{y}_2, \mathbf{x}_2, \boldsymbol{\theta}), \dots, \mathbf{q}(\mathbf{y}_n, \mathbf{x}_n, \boldsymbol{\theta})$.
\mathbf{Q}_i	is an $n \times g$ matrix $\frac{\partial \mathbf{Q}}{\partial \theta_i}$.
\mathbf{I}	is an $n \times n$ identity matrix.
\mathbf{J}_t	is $\frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})}{\partial \mathbf{y}_t}$, which is a $g \times g$ Jacobian matrix.
\mathbf{m}_n	is first moment of the crossproduct $\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t$, $\mathbf{m}_n = \frac{1}{n} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t$
\mathbf{z}_t	is a k column vector of instruments for observation t . \mathbf{z}_t' is also the t th row of \mathbf{Z} .
$\hat{\mathbf{V}}$	is the $gk \times gk$ matrix that represents the variance of the moment functions.
k	is the number of instrumental variables used.
<i>constant</i>	is the constant $\frac{ng}{2}(1 + \ln(2\pi))$.
\otimes	is the notation for a Kronecker product.

All vectors are column vectors unless otherwise noted. Other estimates of the covariance matrix for FIML are also available.

Dependent Regressors and Two-Stage Least Squares

Ordinary regression analysis is based on several assumptions. A key assumption is that the independent variables are in fact statistically independent of the unobserved error component of the model. If this assumption is not true (if the regressor varies systematically with the error), then ordinary regression produces inconsistent results. The parameter estimates are *biased*.

Regressors might fail to be independent variables because they are dependent variables in a larger simultaneous system. For this reason, the problem of dependent regressors is often called *simultaneous equation bias*. For example, consider the following two-equation system:

$$y_1 = a_1 + b_1 y_2 + c_1 x_1 + \epsilon_1$$

$$y_2 = a_2 + b_2 y_1 + c_2 x_2 + \epsilon_2$$

In the first equation, y_2 is a dependent, or *endogenous*, variable. As shown by the second equation, y_2 is a function of y_1 , which by the first equation is a function of ϵ_1 , and therefore y_2 depends on ϵ_1 . Likewise, y_1 depends on ϵ_2 and is a dependent regressor in the second equation. This is an example of a *simultaneous equation* system; y_1 and y_2 are a function of all the variables in the system.

Using the ordinary least squares (OLS) estimation method to estimate these equations produces biased estimates. One solution to this problem is to replace y_1 and y_2 on the right-hand side of the equations with predicted values, thus changing the regression problem to the following:

$$y_1 = a_1 + b_1 \hat{y}_2 + c_1 x_1 + \epsilon_1$$

$$y_2 = a_2 + b_2 \hat{y}_1 + c_2 x_2 + \epsilon_2$$

This method requires estimating the predicted values \hat{y}_1 and \hat{y}_2 through a preliminary, or “first stage,” *instrumental regression*. An instrumental regression is a regression of the dependent regressors on a set of *instrumental variables*, which can be any independent variables useful for predicting the dependent regressors. In this example, the equations are linear and the exogenous variables for the whole system are known. Thus, the best choice for instruments (of the variables in the model) are the variables x_1 and x_2 .

This method is known as *two-stage least squares* or 2SLS, or more generally as the *instrumental variables method*. The 2SLS method for linear models is discussed in Pindyck (1981, p. 191–192). For nonlinear models this situation is more complex, but the idea is the same. In nonlinear 2SLS, the derivatives of the model with respect to the parameters are replaced with predicted values. See the section “[Choice of Instruments](#)” on page 1162 for further discussion of the use of instrumental variables in nonlinear regression.

To perform nonlinear 2SLS estimation with PROC MODEL, specify the instrumental variables with an INSTRUMENTS statement and specify the 2SLS or N2SLS option in the FIT statement. The following statements show how to estimate the first equation in the preceding example with PROC MODEL:

```
proc model data=in;
  y1 = a1 + b1 * y2 + c1 * x1;
  fit y1 / 2sls;
  instruments x1 x2;
run;
```

The 2SLS or instrumental variables estimator can be computed by using a first-stage regression on the instrumental variables as described previously. However, PROC MODEL actually uses the equivalent but computationally more appropriate technique of projecting the regression problem into the linear space defined by the instruments. Thus, PROC MODEL does not produce any “first stage” results when you use 2SLS. If you specify the FSRSQ option in the FIT statement, PROC MODEL prints “First-Stage R^2 ” statistic for each parameter estimate.

Formally, the $\hat{\theta}$ that minimizes

$$\hat{\Sigma}_n = \frac{1}{n} \left(\sum_{t=1}^n (\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \otimes \mathbf{z}_t) \right)' \left(\sum_{t=1}^n I \otimes \mathbf{z}_t \mathbf{z}_t' \right)^{-1} \left(\sum_{t=1}^n (\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \otimes \mathbf{z}_t) \right)$$

is the N2SLS estimator of the parameters. The estimate of Σ at the final iteration is used in the covariance of the parameters given in [Table 19.2](#). See Amemiya (1985, p. 250) for details on the properties of nonlinear two-stage least squares.

Seemingly Unrelated Regression

If the regression equations are not simultaneous (so there are no dependent regressors), *seemingly unrelated regression* (SUR) can be used to estimate systems of equations with correlated random errors. The large-sample efficiency of an estimation can be improved if these cross-equation correlations are taken into account. SUR is also known as *joint generalized least squares* or *Zellner regression*. Formally, the $\hat{\theta}$ that minimizes

$$\hat{S}_n = \frac{1}{n} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)' \hat{\Sigma}^{-1} \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)$$

is the SUR estimator of the parameters.

The SUR method requires an estimate of the cross-equation covariance matrix, Σ . PROC MODEL first performs an OLS estimation, computes an estimate, $\hat{\Sigma}$, from the OLS residuals, and then performs the SUR estimation based on $\hat{\Sigma}$. The OLS results are not printed unless you specify the OLS option in addition to the SUR option.

You can specify the $\hat{\Sigma}$ to use for SUR by storing the matrix in a SAS data set and naming that data set in the SDATA= option. You can also feed the $\hat{\Sigma}$ computed from the SUR residuals back into the SUR estimation process by specifying the ITSUR option. You can print the estimated covariance matrix $\hat{\Sigma}$ by using the COVS option in the FIT statement.

The SUR method requires estimation of the Σ matrix, and this increases the sampling variability of the estimator for small sample sizes. The efficiency gain that SUR has over OLS is a large sample property, and you must have a reasonable amount of data to realize this gain. For a more detailed discussion of SUR, see Pindyck and Rubinfeld (1981, p. 331-333).

Three-Stage Least Squares Estimation

If the equation system is simultaneous, you can combine the 2SLS and SUR methods to take into account both dependent regressors and cross-equation correlation of the errors. This is called *three-stage least squares* (3SLS).

Formally, the $\hat{\theta}$ that minimizes

$$\hat{S}_n = \frac{1}{n} \left(\sum_{t=1}^n (\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \otimes \mathbf{z}_t) \right)' \left(\sum_{t=1}^n (\hat{\Sigma} \otimes \mathbf{z}_t \mathbf{z}_t') \right)^{-1} \left(\sum_{t=1}^n (\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \otimes \mathbf{z}_t) \right)$$

is the 3SLS estimator of the parameters. For more details on 3SLS, see Gallant (1987, p. 435).

Residuals from the 2SLS method are used to estimate the Σ matrix required for 3SLS. The results of the preliminary 2SLS step are not printed unless the 2SLS option is also specified.

To use the three-stage least squares method, specify an INSTRUMENTS statement and use the 3SLS or N3SLS option in either the PROC MODEL statement or a FIT statement.

Generalized Method of Moments (GMM)

For systems of equations with heteroscedastic errors, generalized method of moments (GMM) can be used to obtain efficient estimates of the parameters. See the section “[Heteroscedasticity](#)” on page 1129 for alternatives to GMM.

Consider the nonlinear model

$$\begin{aligned}\epsilon_t &= \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \\ \mathbf{z}_t &= \mathbf{Z}(\mathbf{x}_t)\end{aligned}$$

where \mathbf{z}_t is a vector of instruments and ϵ_t is an unobservable disturbance vector that can be serially correlated and nonstationary.

In general, the following orthogonality condition is desired:

$$E(\epsilon_t \otimes \mathbf{z}_t) = 0$$

This condition states that the expected crossproducts of the unobservable disturbances, ϵ_t , and functions of the observable variables are set to 0. The first moment of the crossproducts is

$$\begin{aligned}\mathbf{m}_n &= \frac{1}{n} \sum_{t=1}^n \mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \\ \mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) &= \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t\end{aligned}$$

where $\mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \in R^{gk}$.

The case where $gk > p$ is considered here, where p is the number of parameters.

Estimate the true parameter vector θ^0 by the value of $\hat{\theta}$ that minimizes

$$S(\theta, \mathbf{V}) = [n\mathbf{m}_n(\theta)]' \mathbf{V}^{-1} [n\mathbf{m}_n(\theta)] / n$$

where

$$\mathbf{V} = \text{Cov}([n\mathbf{m}_n(\theta^0)], [n\mathbf{m}_n(\theta^0)]')$$

The parameter vector that minimizes this objective function is the GMM estimator. GMM estimation is requested in the FIT statement with the GMM option.

The variance of the moment functions, \mathbf{V} , can be expressed as

$$\begin{aligned}\mathbf{V} &= E \left(\sum_{t=1}^n \epsilon_t \otimes \mathbf{z}_t \right) \left(\sum_{s=1}^n \epsilon_s \otimes \mathbf{z}_s \right)' \\ &= \sum_{t=1}^n \sum_{s=1}^n E [(\epsilon_t \otimes \mathbf{z}_t)(\epsilon_s \otimes \mathbf{z}_s)'] \\ &= n\mathbf{S}_n^0\end{aligned}$$

where \mathbf{S}_n^0 is estimated as

$$\hat{\mathbf{S}}_n = \frac{1}{n} \sum_{t=1}^n \sum_{s=1}^n (\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t)(\mathbf{q}(\mathbf{y}_s, \mathbf{x}_s, \boldsymbol{\theta}) \otimes \mathbf{z}_s)'$$

Note that $\hat{\mathbf{S}}_n$ is a $gk \times gk$ matrix. Because $\text{Var}(\hat{\mathbf{S}}_n)$ does not decrease with increasing n , you consider estimators of \mathbf{S}_n^0 of the form:

$$\begin{aligned} \hat{\mathbf{S}}_n(l(n)) &= \sum_{\tau=-n+1}^{n-1} \hat{w}\left(\frac{\tau}{l(n)}\right) \mathbf{D} \hat{\mathbf{S}}_{n,\tau} \mathbf{D} \\ \hat{\mathbf{S}}_{n,\tau} &= \begin{cases} \sum_{t=1+\tau}^n [\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}^\#) \otimes \mathbf{z}_t][\mathbf{q}(\mathbf{y}_{t-\tau}, \mathbf{x}_{t-\tau}, \boldsymbol{\theta}^\#) \otimes \mathbf{z}_{t-\tau}]' & \tau \geq 0 \\ (\hat{\mathbf{S}}_{n,-\tau})' & \tau < 0 \end{cases} \\ \hat{w}\left(\frac{\tau}{l(n)}\right) &= \begin{cases} w\left(\frac{\tau}{l(n)}\right) & l(n) > 0 \\ \delta_{\tau,0} & l(n) = 0 \end{cases} \end{aligned}$$

where $l(n)$ is a scalar function that computes the bandwidth parameter, $w(\cdot)$ is a scalar valued kernel, and the Kronecker delta function, $\delta_{i,j}$, is 1 if $i = j$ and 0 otherwise. The diagonal matrix \mathbf{D} is used for a small sample degrees of freedom correction (Gallant 1987). The initial $\boldsymbol{\theta}^\#$ used for the estimation of $\hat{\mathbf{S}}_n$ is obtained from a 2SLS estimation of the system. The degrees of freedom correction is handled by the VARDEF= option as it is for the \mathbf{S} matrix estimation.

The following kernels are supported by PROC MODEL. They are listed with their default bandwidth functions.

Bartlett: KERNEL=BART

$$\begin{aligned} w(x) &= \begin{cases} 1 - |x| & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases} \\ l(n) &= \frac{1}{2} n^{1/3} \end{aligned}$$

Parzen: KERNEL=PARZEN

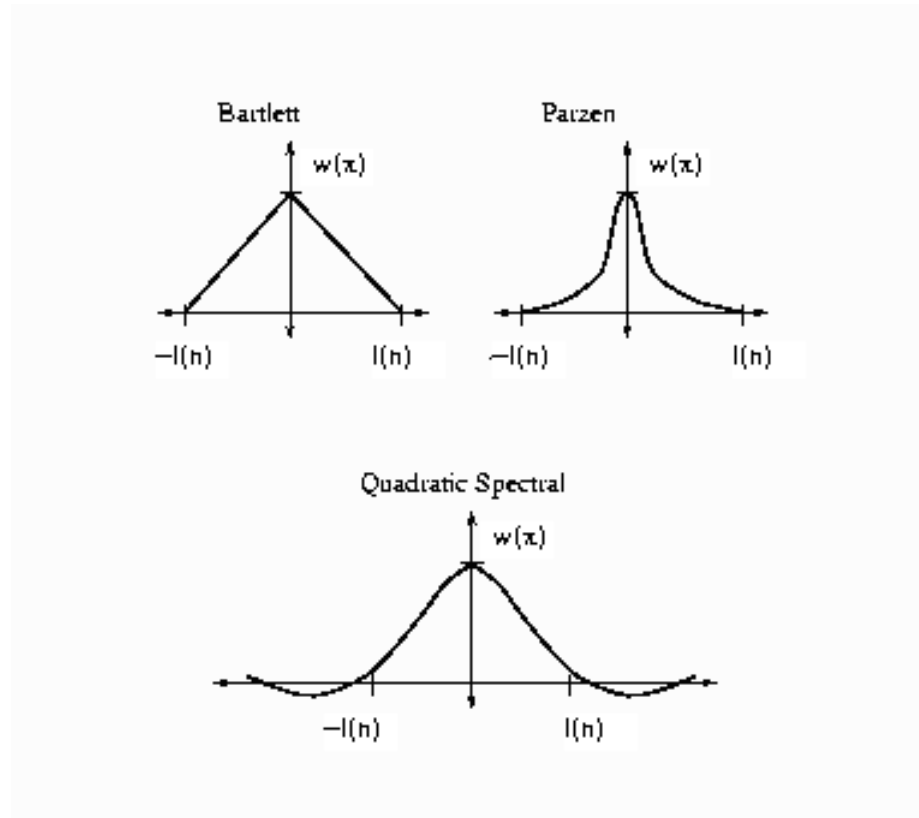
$$\begin{aligned} w(x) &= \begin{cases} 1 - 6|x|^2 + 6|x|^3 & 0 \leq |x| \leq \frac{1}{2} \\ 2(1 - |x|)^3 & \frac{1}{2} \leq |x| \leq 1 \\ 0 & \text{otherwise} \end{cases} \\ l(n) &= n^{1/5} \end{aligned}$$

Quadratic spectral: KERNEL=QS

$$w(x) = \frac{25}{12\pi^2 x^2} \left(\frac{\sin(6\pi x/5)}{6\pi x/5} - \cos(6\pi x/5) \right)$$

$$l(n) = \frac{1}{2}n^{1/5}$$

Figure 19.21 Kernels for Smoothing



Details of the properties of these and other kernels are given in Andrews (1991). Kernels are selected with the KERNEL= option; KERNEL=PARZEN is the default. The general form of the KERNEL= option is

KERNEL= (PARZEN | QS | BART, c, e)

where the $e \geq 0$ and $c \geq 0$ are used to compute the bandwidth parameter as

$$l(n) = cn^e$$

The bias of the standard error estimates increases for large bandwidth parameters. A warning message is produced for bandwidth parameters greater than $n^{1/3}$. For a discussion of the computation of the optimal $l(n)$, refer to Andrews (1991).

The “Newey-West” kernel (Newey and West 1987) corresponds to the Bartlett kernel with bandwidth parameter $l(n) = L + 1$. That is, if the “lag length” for the Newey-West kernel is L , then the corresponding MODEL procedure syntax is `KERNEL=(bart, L+1, 0)`.

Andrews and Monahan (1992) show that using prewhitening in combination with GMM can improve confidence interval coverage and reduce over rejection of t statistics at the cost of inflating the variance and MSE of the estimator. Prewhitening can be performed by using the `%AR` macros.

For the special case that the errors are not serially correlated—that is,

$$E(e_t \otimes \mathbf{z}_t)(e_s \otimes \mathbf{z}_s) = 0 \quad t \neq s$$

the estimate for \mathbf{S}_n^0 reduces to

$$\hat{\mathbf{S}}_n = \frac{1}{n} \sum_{t=1}^n [\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t][\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \otimes \mathbf{z}_t]'$$

The option `KERNEL=(kernel,0,)` is used to select this type of estimation when using GMM.

Covariance of GMM estimators

The covariance of GMM estimators, given a general weighting matrix \mathbf{V}_G^{-1} , is

$$[(\mathbf{YX})'\mathbf{V}_G^{-1}(\mathbf{YX})]^{-1}(\mathbf{YX})'\mathbf{V}_G^{-1}\hat{\mathbf{V}}\mathbf{V}_G^{-1}(\mathbf{YX})[(\mathbf{YX})'\mathbf{V}_G^{-1}(\mathbf{YX})]^{-1}$$

By default or when `GENGMMV` is specified, this is the covariance of GMM estimators.

If the weighting matrix is the same as $\hat{\mathbf{V}}$, then the covariance of GMM estimators becomes

$$[(\mathbf{YX})'\hat{\mathbf{V}}^{-1}(\mathbf{YX})]^{-1}$$

If `NOGENGMMV` is specified, this is used as the covariance estimators.

Testing Overidentifying Restrictions

Let r be the number of unique instruments times the number of equations. The value r represents the number of orthogonality conditions imposed by the GMM method. Under the assumptions of the GMM method, $r - p$ linearly independent combinations of the orthogonality should be close to zero. The GMM estimates are computed by setting these combinations to zero. When r exceeds the number of parameters to be estimated, the `OBJECTIVE*N`, reported at the end of the estimation, is an asymptotically valid statistic to test the null hypothesis that the overidentifying restrictions of the model are valid. The `OBJECTIVE*N` is distributed as a chi-square with $r - p$ degrees of freedom (Hansen 1982, p. 1049). When the GMM method is selected, the value of the overidentifying restrictions test statistic, also known as Hansen’s J test statistic, and its associated number of degrees of freedom are reported together with the probability under the null hypothesis.

Iterated Generalized Method of Moments (ITGMM)

Iterated generalized method of moments is similar to the iterated versions of 2SLS, SUR, and 3SLS. The variance matrix for GMM estimation is reestimated at each iteration with the parameters determined by the

GMM estimation. The iteration terminates when the variance matrix for the equation errors change less than the CONVERGE= value. Iterated generalized method of moments is selected by the ITGMM option on the FIT statement. For some indication of the small sample properties of ITGMM, see Ferson and Foerster (1993).

Simulated Method of Moments (SMM)

The SMM method uses simulation techniques in model inference and estimation. It is appropriate for estimating models in which integrals appear in the objective function, and these integrals can be approximated by simulation. There might be various reasons for integrals to appear in an objective function (for example, transformation of a latent model into an observable model, missing data, random coefficients, heterogeneity, and so on).

This simulation method can be used with all the estimation methods except full information maximum likelihood (FIML) in PROC MODEL. SMM, also known as simulated generalized method of moments (SGMM), is the default estimation method because of its nice properties.

Estimation Details

A general nonlinear model can be described as

$$\epsilon_t = \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})$$

where $\mathbf{q} \in R^g$ is a real vector valued function of $\mathbf{y}_t \in R^g$, $\mathbf{x}_t \in R^l$, $\boldsymbol{\theta} \in R^p$; g is the number of equations; l is the number of exogenous variables (lagged endogenous variables are considered exogenous here); p is the number of parameters; and t ranges from 1 to n . ϵ_t is an unobservable disturbance vector with the following properties:

$$\begin{aligned} E(\epsilon_t) &= 0 \\ E(\epsilon_t \epsilon_t') &= \Sigma \end{aligned}$$

In many cases, it is not possible to write $\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})$ in a closed form. Instead \mathbf{q} is expressed as an integral of a function \mathbf{f} ; that is,

$$\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) = \int \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}, \mathbf{u}_t) dP(\mathbf{u})$$

where $\mathbf{f} \in R^g$ is a real vector valued function of $\mathbf{y}_t \in R^g$, $\mathbf{x}_t \in R^l$, $\boldsymbol{\theta} \in R^p$, and $\mathbf{u}_t \in R^m$, m is the number of stochastic variables with a known distribution $P(\mathbf{u})$. Since the distribution of \mathbf{u} is completely known, it is possible to simulate artificial draws from this distribution. Using such independent draws \mathbf{u}_{ht} , $h = 1, \dots, H$, and the strong law of large numbers, \mathbf{q} can be approximated by

$$\frac{1}{H} \sum_{h=1}^H \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}, \mathbf{u}_{ht}).$$

Simulated Generalized Method of Moments (SGMM)

Generalized method of moments (GMM) is widely used to obtain efficient estimates for general model systems. When the moment conditions are not readily available in closed forms but can be approximated by simulation, simulated generalized method of moments (SGMM) can be used. The SGMM estimators have the nice property of being asymptotically consistent and normally distributed even if the number of draws H is fixed (see McFadden 1989; Pakes and Pollard 1989).

Consider the nonlinear model

$$\begin{aligned}\epsilon_t &= \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) = \frac{1}{H} \sum_{h=1}^H \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \theta, \mathbf{u}_{ht}) \\ \mathbf{z}_t &= \mathbf{Z}(\mathbf{x}_t)\end{aligned}$$

where $\mathbf{z}_t \in R^k$ is a vector of k instruments and ϵ_t is an unobservable disturbance vector that can be serially correlated and nonstationary. In the case of no instrumental variables, \mathbf{z}_t is 1. $\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)$ is the vector of moment conditions, and it is approximated by simulation.

In general, theory suggests the following orthogonality condition

$$E(\epsilon_t \otimes \mathbf{z}_t) = 0$$

which states that the expected crossproducts of the unobservable disturbances, ϵ_t , and functions of the observable variables are set to 0. The sample means of the crossproducts are

$$\begin{aligned}\mathbf{m}_n &= \frac{1}{n} \sum_{t=1}^n \mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \theta) \\ \mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \theta) &= \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \otimes \mathbf{z}_t\end{aligned}$$

where $\mathbf{m}(\mathbf{y}_t, \mathbf{x}_t, \theta) \in R^{gk}$. The case where $gk > p$, where p is the number of parameters, is considered here. An estimate of the true parameter vector θ^0 is the value of $\hat{\theta}$ that minimizes

$$S(\theta, V) = [n\mathbf{m}_n(\theta)]' \mathbf{V}^{-1} [n\mathbf{m}_n(\theta)] / n$$

where

$$\mathbf{V} = \text{Cov}(\mathbf{m}(\theta^0), \mathbf{m}(\theta^0)').$$

The steps for SGMM are as follows:

1. Start with a positive definite $\hat{\mathbf{V}}$ matrix. This $\hat{\mathbf{V}}$ matrix can be estimated from a consistent estimator of θ . If $\hat{\theta}$ is a consistent estimator, then \mathbf{u}_t for $t = 1, \dots, n$ can be simulated H' number of times. A consistent estimator of \mathbf{V} is obtained as

$$\hat{\mathbf{V}} = \frac{1}{n} \sum_{t=1}^n \left[\frac{1}{H'} \sum_{h=1}^{H'} \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \hat{\theta}, \mathbf{u}_{ht}) \otimes \mathbf{z}_t \right] \left[\frac{1}{H'} \sum_{h=1}^{H'} \mathbf{f}(\mathbf{y}_t, \mathbf{x}_t, \hat{\theta}, \mathbf{u}_{ht}) \otimes \mathbf{z}_t \right]'$$

H' must be large so that this is an consistent estimator of \mathbf{V} .

2. Simulate H number of \mathbf{u}_t for $t = 1, \dots, n$. As shown by Gourieroux and Monfort (1993), the number of simulations H does not need to be very large. For $H = 10$, the SGMM estimator achieves 90% of the efficiency of the corresponding GMM estimator. Find $\hat{\theta}$ that minimizes the quadratic product of the moment conditions again with the weight matrix being $\hat{\mathbf{V}}^{-1}$.

$$\min_{\theta} [n\mathbf{m}_n(\theta)]' \hat{\mathbf{V}}^{-1} [n\mathbf{m}_n(\theta)] / n$$

3. The covariance matrix of $\sqrt{n}\theta$ is given as (Gourieroux and Monfort 1993)

$$\Sigma_1^{-1} \mathbf{D} \hat{\mathbf{V}}^{-1} \mathbf{V}(\hat{\theta}) \hat{\mathbf{V}}^{-1} \mathbf{D}' \Sigma_1^{-1} + \frac{1}{H} \Sigma_1^{-1} \mathbf{D} \hat{\mathbf{V}}^{-1} E[\mathbf{z} \otimes \text{Var}(\mathbf{f}|\mathbf{x}) \otimes \mathbf{z}] \hat{\mathbf{V}}^{-1} \mathbf{D}' \Sigma_1^{-1}$$

where $\Sigma_1 = \mathbf{D} \hat{\mathbf{V}}^{-1} \mathbf{D}$, \mathbf{D} is the matrix of partial derivatives of the residuals with respect to the parameters, $\mathbf{V}(\hat{\theta})$ is the covariance of moments from estimated parameters $\hat{\theta}$, and $\text{Var}(\mathbf{f}|\mathbf{x})$ is the covariance of moments for each observation from simulation. The first term is the variance-covariance matrix of the exact GMM estimator, and the second term accounts for the variation contributed by simulating the moments.

Implementation in PROC MODEL

In PROC MODEL, if the user specifies the GMM and NDRAW options in the FIT statement, PROC MODEL first fits the model by using N2SLS and computes $\hat{\mathbf{V}}$ by using the estimates from N2SLS and H' simulation. If NO2SLS is specified in the FIT statement, $\hat{\mathbf{V}}$ is read from VDATA= data set. If the user does not provide a $\hat{\mathbf{V}}$ matrix, the initial starting value of θ is used as the estimator for computing the $\hat{\mathbf{V}}$ matrix in step 1. If ITGMM option is specified instead of GMM, then PROC MODEL iterates from step 1 to step 3 until the \mathbf{V} matrix converges.

The consistency of the parameter estimates is not affected by the variance correction shown in the second term in step 3. The correction on the variance of parameter estimates is not computed by default. To add the adjustment, use ADJSMMV option on the FIT statement. This correction is of the order of $\frac{1}{H}$ and is small even for moderate H .

The following example illustrates how to use SMM to estimate a simple regression model. Suppose the model is

$$y = a + bx + u, u \sim iid N(0, s^2).$$

First, consider the problem in a GMM context. The first two moments of y are easily derived:

$$\begin{aligned} E(y) &= a + bx \\ E(y^2) &= (a + bx)^2 + s^2 \end{aligned}$$

Rewrite the moment conditions in the form similar to the discussion above:

$$\begin{aligned} \epsilon_{1t} &= y_t - (a + bx_t) \\ \epsilon_{2t} &= y_t^2 - (a + bx_t)^2 - s^2 \end{aligned}$$

Then you can estimate this model by using GMM with following statements:

```

proc model data=a;
  parms a b s;
  instrument x;
  eq.m1 = y-(a+b*x);
  eq.m2 = y*y - (a+b*x)**2 - s*s;
  bound s > 0;
  fit m1 m2 / gmm;
run;

```

Now suppose you do not have the closed form for the moment conditions. Instead you can simulate the moment conditions by generating H number of simulated samples based on the parameters. Then the simulated moment conditions are

$$\epsilon_{1t} = \frac{1}{H} \sum_{h=1}^H \{y_t - (a + bx_t + su_{t,h})\}$$

$$\epsilon_{2t} = \frac{1}{H} \sum_{h=1}^H \{y_t^2 - (a + bx_t + su_{t,h})^2\}$$

This model can be estimated by using SGMM with the following statements:

```

proc model data=_tmpdata;
  parms a b s;
  instrument x;
  ysim = (a+b*x) + s * rannor( 98711 );
  eq.m1 = y-ysim;
  eq.m2 = y*y - ysim*ysim;
  bound s > 0;
  fit m1 m2 / gmm ndraw=10;
run;

```

You can use the following MOMENT statement instead of specifying the two moment equations above:

```

moment ysim=(1, 2);

```

In cases where you require a large number of moment equations, using the MOMENT statement to specify them is more efficient.

Note that the NDRAW= option tells PROC MODEL that this is a simulation-based estimation. Thus, the random number function RANNOR returns random numbers in estimation process. During the simulation, 10 draws of $m1$ and $m2$ are generated for each observation, and the averages enter the objective functions just as the equations specified previously.

Other Estimation Methods

The simulation method can be used not only with GMM and ITGMM, but also with OLS, ITOLS, SUR, ITSUR, N2SLS, IT2SLS, N3SLS, and IT3SLS. These simulation-based methods are similar to the corresponding methods in PROC MODEL; the only difference is that the objective functions include the average of the H simulations.

Full Information Maximum Likelihood Estimation (FIML)

A different approach to the simultaneous equation bias problem is the full information maximum likelihood (FIML) estimation method (Amemiya 1977).

Compared to the instrumental variables methods (2SLS and 3SLS), the FIML method has these advantages and disadvantages:

- FIML does not require instrumental variables.
- FIML requires that the model include the full equation system, with as many equations as there are endogenous variables. With 2SLS or 3SLS, you can estimate some of the equations without specifying the complete system.
- FIML assumes that the equations errors have a multivariate normal distribution. If the errors are not normally distributed, the FIML method might produce poor results. 2SLS and 3SLS do not assume a specific distribution for the errors.
- The FIML method is computationally expensive.

The full information maximum likelihood estimators of θ and σ are the $\hat{\theta}$ and $\hat{\sigma}$ that minimize the negative log-likelihood function:

$$\begin{aligned} \mathbf{l}_n(\theta, \sigma) = & \frac{ng}{2} \ln(2\pi) - \sum_{t=1}^n \ln \left(\left| \frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)}{\partial \mathbf{y}'_t} \right| \right) + \frac{n}{2} \ln(|\Sigma(\sigma)|) \\ & + \frac{1}{2} \text{tr} \left(\Sigma(\sigma)^{-1} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \mathbf{q}'(\mathbf{y}_t, \mathbf{x}_t, \theta) \right) \end{aligned}$$

The option FIML requests full information maximum likelihood estimation. If the errors are distributed normally, FIML produces efficient estimators of the parameters. If instrumental variables are not provided, the starting values for the estimation are obtained from a SUR estimation. If instrumental variables are provided, then the starting values are obtained from a 3SLS estimation. The log-likelihood value and the l_2 norm of the gradient of the negative log-likelihood function are shown in the estimation summary.

FIML Details

To compute the minimum of $\mathbf{l}_n(\theta, \sigma)$, this function is *concentrated* using the relation

$$\Sigma(\theta) = \frac{1}{n} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \mathbf{q}'(\mathbf{y}_t, \mathbf{x}_t, \theta)$$

This results in the concentrated negative log-likelihood function discussed in Davidson and MacKinnon (1993):

$$\mathbf{l}_n(\theta) = \frac{ng}{2} (1 + \ln(2\pi)) - \sum_{t=1}^n \ln \left| \frac{\partial}{\partial \mathbf{y}'_t} \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \right| + \frac{n}{2} \ln |\Sigma(\theta)|$$

The gradient of the negative log-likelihood function is

$$\begin{aligned}\frac{\partial}{\partial \theta_i} \mathbf{l}_n(\boldsymbol{\theta}) &= \sum_{t=1}^n \nabla_i(t) \\ \nabla_i(t) &= -\text{tr} \left(\left(\frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})}{\partial \mathbf{y}'_t} \right)^{-1} \frac{\partial^2 \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})}{\partial \mathbf{y}'_t \partial \theta_i} \right) \\ &+ \frac{1}{2} \text{tr} \left(\boldsymbol{\Sigma}(\boldsymbol{\theta})^{-1} \frac{\partial \boldsymbol{\Sigma}(\boldsymbol{\theta})}{\partial \theta_i} \right. \\ &\quad \left. [I - \boldsymbol{\Sigma}(\boldsymbol{\theta})^{-1} \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'] \right) \\ &+ \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}') \boldsymbol{\Sigma}(\boldsymbol{\theta})^{-1} \frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})}{\partial \theta_i}\end{aligned}$$

where

$$\frac{\partial \boldsymbol{\Sigma}(\boldsymbol{\theta})}{\partial \theta_i} = \frac{2}{n} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'}{\partial \theta_i}$$

The estimator of the variance-covariance of $\hat{\boldsymbol{\theta}}$ (COVB) for FIML can be selected with the COVBEST= option with the following arguments:

CROSS selects the crossproducts estimator of the covariance matrix (Gallant 1987, p. 473):

$$C = \left(\frac{1}{n} \sum_{t=1}^n \nabla(t) \nabla'(t) \right)^{-1}$$

where $\nabla(t) = [\nabla_1(t), \nabla_2(t), \dots, \nabla_p(t)]'$. This is the default.

GLS selects the generalized least squares estimator of the covariance matrix. This is computed as (Dagenais 1978)

$$C = [\hat{\mathbf{Z}}'(\boldsymbol{\Sigma}(\boldsymbol{\theta})^{-1} \otimes I) \hat{\mathbf{Z}}]^{-1}$$

where $\hat{\mathbf{Z}} = (\hat{Z}_1, \hat{Z}_2, \dots, \hat{Z}_p)$ is $ng \times p$ and each \hat{Z}_i column vector is obtained from stacking the columns of

$$\mathbf{U} \frac{1}{n} \sum_{t=1}^n \left(\frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'}{\partial \mathbf{y}} \right)^{-1} \frac{\partial^2 \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})'}{\partial \mathbf{y}'_n \partial \theta_i} - Q_i$$

\mathbf{U} is an $n \times g$ matrix of residuals and q_i is an $n \times g$ matrix $\frac{\partial \mathbf{Q}}{\partial \theta_i}$.

FDA selects the inverse of concentrated likelihood Hessian as an estimator of the covariance matrix. The Hessian is computed numerically, so for a large problem this is computationally expensive.

The HESSIAN= option controls which approximation to the Hessian is used in the minimization procedure. Alternate approximations are used to improve convergence and execution time. The choices are as follows:

CROSS	The crossproducts approximation is used.
GLS	The generalized least squares approximation is used (default).
FDA	The Hessian is computed numerically by finite differences.

HESSIAN=GLS has better convergence properties in general, but COVBEST=CROSS produces the most pessimistic standard error bounds. When the HESSIAN= option is used, the default estimator of the variance-covariance of $\hat{\theta}$ is the inverse of the Hessian selected.

Multivariate t Distribution Estimation

The multivariate t distribution is specified by using the ERRORMODEL statement with the T option. Other method specifications (FIML and OLS, for example) are ignored when the ERRORMODEL statement is used for a distribution other than normal.

The probability density function for the multivariate t distribution is

$$P_q = \frac{\Gamma(\frac{df+m}{2})}{(\pi * df)^{\frac{m}{2}} * \Gamma(\frac{df}{2}) |\Sigma(\sigma)|^{\frac{1}{2}}} * \left(1 + \frac{\mathbf{q}'(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta}) \Sigma(\sigma)^{-1} \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})}{df} \right)^{-\frac{df+m}{2}}$$

where m is the number of equations and df is the degrees of freedom.

The maximum likelihood estimators of θ and σ are the $\hat{\theta}$ and $\hat{\sigma}$ that minimize the negative log-likelihood function:

$$\begin{aligned} \ln(\boldsymbol{\theta}, \sigma) = & - \sum_{t=1}^n \ln \left(\frac{\Gamma(\frac{df+m}{2})}{(\pi * df)^{\frac{m}{2}} * \Gamma(\frac{df}{2})} * \left(1 + \frac{q'_t \Sigma^{-1} q_t}{df} \right)^{-\frac{df+m}{2}} \right) \\ & + \frac{n}{2} * \ln(|\Sigma|) - \sum_{t=1}^n \ln \left(\left| \frac{\partial q_t}{\partial \mathbf{y}'_t} \right| \right) \end{aligned}$$

The ERRORMODEL statement is used to request the t distribution maximum likelihood estimation. An OLS estimation is done to obtain initial parameter estimates and MSE.var estimates. Use NOOLS to turn off this initial estimation. If the errors are distributed normally, t distribution estimation produces results similar to FIML.

The multivariate model has a single shared degrees-of-freedom parameter, which is estimated. The degrees-of-freedom parameter can also be set to a fixed value. The log-likelihood value and the l_2 norm of the gradient of the negative log-likelihood function are shown in the estimation summary.

t Distribution Details

Since a variance term is explicitly specified by using the ERRORMODEL statement, $\Sigma(\theta)$ is estimated as a correlation matrix and $\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \boldsymbol{\theta})$ is normalized by the variance. The gradient of the negative log-likelihood

function with respect to the degrees of freedom is

$$\begin{aligned} \frac{\partial l_n}{\partial df} &= \frac{nm}{2df} - \frac{n}{2} \frac{\Gamma'(\frac{df+m}{2})}{\Gamma(\frac{df+m}{2})} + \frac{n}{2} \frac{\Gamma'(\frac{df}{2})}{\Gamma(\frac{df}{2})} + \\ &\quad 0.5 \log(1 + \frac{\mathbf{q}'\Sigma^{-1}\mathbf{q}}{df}) - \frac{0.5(df+m)}{(1 + \frac{\mathbf{q}'\Sigma^{-1}\mathbf{q}}{df})} \frac{\mathbf{q}'\Sigma^{-1}\mathbf{q}}{df^2} \end{aligned}$$

The gradient of the negative log-likelihood function with respect to the parameters is

$$\frac{\partial l_n}{\partial \theta_i} = \frac{0.5(df+m)}{(1 + \mathbf{q}'\Sigma^{-1}\mathbf{q}/df)} \left[\frac{(2 \mathbf{q}'\Sigma^{-1} \frac{\partial \mathbf{q}}{\partial \theta_i})}{df} + \mathbf{q}'\Sigma^{-1} \frac{\partial \Sigma}{\partial \theta_i} \Sigma^{-1} \mathbf{q} \right] - \frac{n}{2} \text{trace}(\Sigma^{-1} \frac{\partial \Sigma}{\partial \theta_i})$$

where

$$\frac{\partial \Sigma(\theta)}{\partial \theta_i} = \frac{2}{n} \sum_{t=1}^n \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) \frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)'}{\partial \theta_i}$$

and

$$\mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) = \frac{\epsilon(\theta)}{\sqrt{h(\theta)}} \in R^{m \times n}$$

The estimator of the variance-covariance of $\hat{\theta}$ (COVB) for the t distribution is the inverse of the likelihood Hessian. The gradient is computed analytically, and the Hessian is computed numerically.

Empirical Distribution Estimation and Simulation

The following SAS statements fit a model that uses least squares as the likelihood function, but represent the distribution of the residuals with an empirical cumulative distribution function (CDF). The plot of the empirical probability distribution is shown in [Figure 19.22](#).

```
data t; /* Sum of two normals */
  format date monyy.;
  do t = 0 to 9.9 by 0.1;
    date = intnx( 'month', '1jun90'd, (t*10)-1 );
    y = 0.1 * (rannor(123)-10) +
        .5 * (rannor(123)+10);
    output;
  end;
run;

ods select Model.Likelihood.ResidSummary
           Model.Likelihood.ParameterEstimates;

proc model data=t time=t itprint;
  dependent y;
```



```

parm a 5;

y = a;
obj = resid.y * resid.y;
errormodel y ~ general( obj )
cdf=(empirical=(tails=( normal percent=10)));

fit y / outsn=s out=r;
id date;

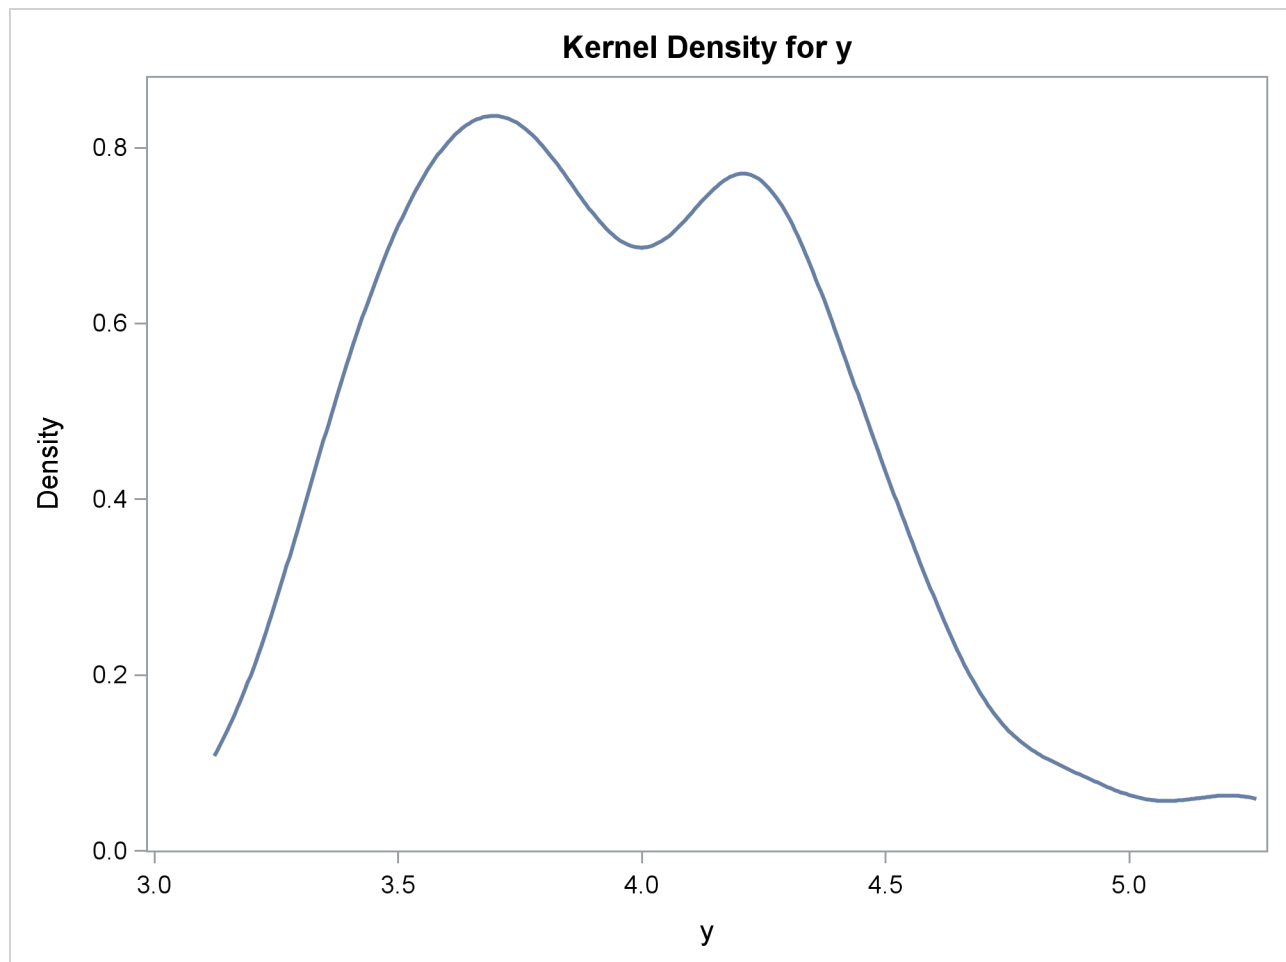
solve y / data=t(where=(date='1aug98'd))
      residdata=r sdata=s
      random=200 seed=6789 out=monte ;

run;

proc kde data=monte;
  univar y / plots=density;
run;

```

Figure 19.22 Empirical PDF Plot



For simulation, if the CDF for the model is not built in to the procedure, you can use the `CDF=EMPIRICAL()` option. This uses the sorted residual data to create an empirical CDF. For computing the inverse CDF, the program needs to know how to handle the tails. For continuous data, the tail distribution is generally poorly determined. To counter this, the `PERCENT=` option specifies the percentage of the observations to use in constructing each tail. The default for the `PERCENT=` option is 10.

A normal distribution or a t distribution is used to extrapolate the tails to infinity. The standard errors for this extrapolation are obtained from the data so that the empirical CDF is continuous.

Properties of the Estimates

All of the methods are consistent. Small sample properties might not be good for nonlinear models. The tests and standard errors reported are based on the convergence of the distribution of the estimates to a normal distribution in large samples.

These nonlinear estimation methods reduce to the corresponding linear systems regression methods if the model is linear. If this is the case, PROC MODEL produces the same estimates as PROC SYSLIN.

Except for GMM, the estimation methods assume that the equation errors for each observation are identically and independently distributed with a 0 mean vector and positive definite covariance matrix Σ consistently estimated by S . For FIML, the errors need to be normally distributed. There are no other assumptions concerning the distribution of the errors for the other estimation methods.

The consistency of the parameter estimates relies on the assumption that the S matrix is a consistent estimate of Σ . These standard error estimates are asymptotically valid, but for nonlinear models they might not be reliable for small samples.

The S matrix used for the calculation of the covariance of the parameter estimates is the best estimate available for the estimation method selected. For S -iterated methods, this is the most recent estimation of Σ . For OLS and 2SLS, an estimate of the S matrix is computed from OLS or 2SLS residuals and used for the calculation of the covariance matrix. For a complete list of the S matrix used for the calculation of the covariance of the parameter estimates, see [Table 19.2](#).

Missing Values

An observation is excluded from the estimation if any variable used for FIT tasks is missing, if the weight for the observation is not greater than 0 when weights are used, or if a DELETE statement is executed by the model program. Variables used for FIT tasks include the equation errors for each equation, the instruments, if any, and the derivatives of the equation errors with respect to the parameters estimated. Note that variables can become missing as a result of computational errors or calculations with missing values.

The number of usable observations can change when different parameter values are used; some parameter values can be invalid and cause execution errors for some observations. PROC MODEL keeps track of the number of usable and missing observations at each pass through the data, and if the number of missing observations counted during a pass exceeds the number that was obtained using the previous parameter vector, the pass is terminated and the new parameter vector is considered infeasible. PROC MODEL never takes a step that produces more missing observations than the current estimate does.

The values used to compute the Durbin-Watson, R^2 , and other statistics of fit are from the observations used in calculating the objective function and do not include any observation for which any needed variable was missing (residuals, derivatives, and instruments).

Details on the Covariance of Equation Errors

There are several \mathbf{S} matrices that can be involved in the various estimation methods and in forming the estimate of the covariance of parameter estimates. These \mathbf{S} matrices are estimates of $\mathbf{\Sigma}$, the true covariance of the equation errors. Apart from the choice of instrumental or noninstrumental methods, many of the methods provided by PROC MODEL differ in the way the various \mathbf{S} matrices are formed and used.

All of the estimation methods result in a final estimate of $\mathbf{\Sigma}$, which is included in the output if the COVS option is specified. The final \mathbf{S} matrix of each method provides the initial \mathbf{S} matrix for any subsequent estimation.

This estimate of the covariance of equation errors is defined as

$$\mathbf{S} = \mathbf{D}(\mathbf{R}'\mathbf{R})\mathbf{D}$$

where $\mathbf{R} = (\mathbf{r}_1, \dots, \mathbf{r}_g)$ is composed of the equation residuals computed from the current parameter estimates in an $n \times g$ matrix and \mathbf{D} is a diagonal matrix that depends on the VARDEF= option.

For VARDEF=N, the diagonal elements of \mathbf{D} are $1/\sqrt{n}$, where n is the number of nonmissing observations. For VARDEF=WGT, n is replaced with the sum of the weights. For VARDEF=WDF, n is replaced with the sum of the weights minus the model degrees of freedom. For the default VARDEF=DF, the i th diagonal element of \mathbf{D} is $1/\sqrt{n - df_i}$, where df_i is the degrees of freedom (number of parameters) for the i th equation. Binkley and Nelson (1984) show the importance of using a degrees-of-freedom correction in estimating $\mathbf{\Sigma}$. Their results indicate that the DF method produces more accurate confidence intervals for N3SLS parameter estimates in the linear case than the alternative approach they tested. VARDEF=N is always used for the computation of the FIML estimates.

For the fixed \mathbf{S} methods, the OUTSUSED= option writes the \mathbf{S} matrix used in the estimation to a data set. This \mathbf{S} matrix is either the estimate of the covariance of equation errors matrix from the preceding estimation, or a prior $\mathbf{\Sigma}$ estimate read in from a data set when the SDATA= option is specified. For the diagonal \mathbf{S} methods, all of the off-diagonal elements of the \mathbf{S} matrix are set to 0 for the estimation of the parameters and for the OUTSUSED= data set, but the output data set produced by the OUTS= option contains the off-diagonal elements. For the OLS and N2SLS methods, there is no previous estimate of the covariance of equation errors matrix, and the option OUTSUSED= saves an identity matrix unless a prior $\mathbf{\Sigma}$ estimate is supplied by the SDATA= option. For FIML, the OUTSUSED= data set contains the \mathbf{S} matrix computed with VARDEF=N. The OUTS= data set contains the \mathbf{S} matrix computed with the selected VARDEF= option. Both versions of the \mathbf{S} matrix appear in the printed output for FIML.

If the COVS option is used, the method is not \mathbf{S} -iterated, \mathbf{S} is not an identity, and the OUTSUSED= matrix is included in the printed output.

For the methods that iterate the covariance of equation errors matrix, the \mathbf{S} matrix is iteratively re-estimated from the residuals produced by the current parameter estimates. This \mathbf{S} matrix estimate iteratively replaces the previous estimate until both the parameter estimates and the estimate of the covariance of equation errors matrix converge. The final OUTS= matrix and OUTSUSED= matrix are thus identical for the \mathbf{S} -iterated methods.

Nested Iterations

By default, for **S**-iterated methods, the **S** matrix is held constant until the parameters converge once. Then the **S** matrix is reestimated. One iteration of the parameter estimation algorithm is performed, and the **S** matrix is again reestimated. This latter process is repeated until convergence of both the parameters and the **S** matrix. Since the objective of the minimization depends on the **S** matrix, this has the effect of chasing a moving target.

When the NESTIT option is specified, iterations are performed to convergence for the structural parameters with a fixed **S** matrix. The **S** matrix is then reestimated, the parameter iterations are repeated to convergence, and so on until both the parameters and the **S** matrix converge. This has the effect of fixing the objective function for the inner parameter iterations. It is more reliable, but usually more expensive, to nest the iterations.

R-Square Statistic

For unrestricted linear models with an intercept successfully estimated by OLS, R^2 is always between 0 and 1. However, nonlinear models do not necessarily encompass the dependent mean as a special case and can produce negative R^2 statistics. Negative R^2 statistics can also be produced even for linear models when an estimation method other than OLS is used and no intercept term is in the model.

R^2 is defined for normalized equations as

$$R^2 = 1 - \frac{SSE}{SSA - \bar{y}^2 \times n}$$

where SSA is the sum of the squares of the actual y 's and \bar{y} are the actual means. R^2 cannot be computed for models in general form because of the need for an actual Y .

Minimization Methods

PROC MODEL currently supports two methods for minimizing the objective function. These methods are described in the following sections.

GAUSS

The Gauss-Newton parameter-change vector for a system with g equations, n nonmissing observations, and p unknown parameters is

$$\Delta = (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{r}$$

where Δ is the change vector, \mathbf{X} is the stacked $ng \times p$ Jacobian matrix of partial derivatives of the residuals with respect to the parameters, and \mathbf{r} is an $ng \times 1$ vector of the stacked residuals. The components of \mathbf{X} and \mathbf{r} are weighted by the \mathbf{S}^{-1} matrix. When instrumental methods are used, \mathbf{X} and \mathbf{r} are the projections of the Jacobian matrix and residuals vector in the instruments space and not the Jacobian and residuals themselves.

In the preceding formula, \mathbf{S} and \mathbf{W} are suppressed. If instrumental variables are used, then the change vector becomes:

$$\Delta = (\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{X})^{-1} \mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{r}$$

This vector is computed at the end of each iteration. The objective function is then computed at the changed parameter values at the start of the next iteration. If the objective function is not improved by the change, the Δ vector is reduced by one-half and the objective function is reevaluated. The change vector will be halved up to MAXSUBITER= times until the objective function is improved. If the objective function cannot be improved after MAXSUBITER= times, the procedure switches to the MARQUARDT method described in the next section to further improve the objective function.

For FIML, the $\mathbf{X}'\mathbf{X}$ matrix is substituted with one of three choices for approximations to the Hessian. See the section “Full Information Maximum Likelihood Estimation (FIML)” on page 1099 in this chapter.

MARQUARDT

The Marquardt-Levenberg parameter change vector is

$$\Delta = (\mathbf{X}'\mathbf{X} + \lambda \text{diag}(\mathbf{X}'\mathbf{X}))^{-1} \mathbf{X}'\mathbf{r}$$

where Δ is the change vector, and \mathbf{X} and \mathbf{r} are the same as for the Gauss-Newton method, described in the preceding section. Before the iterations start, λ is set to a small value (1E–6). At each iteration, the objective function is evaluated at the parameters changed by Δ . If the objective function is not improved, λ is increased to 10λ and the step is tried again. λ can be increased up to MAXSUBITER= times to a maximum of 1E15 (whichever comes first) until the objective function is improved. For the start of the next iteration, λ is reduced to $\max(\lambda/10, 1\text{E}–10)$.

Convergence Criteria

There are a number of measures that could be used as convergence or stopping criteria. PROC MODEL computes five convergence measures labeled R, S, PPC, RPC, and OBJECT.

When an estimation technique that iterates estimates of Σ is used (that is, IT3SLS), two convergence criteria are used. The termination values can be specified with the CONVERGE=(p,s) option in the FIT statement. If the second value, s , is not specified, it defaults to p . The criterion labeled S (described later in the section) controls the convergence of the \mathbf{S} matrix. When S is less than s , the \mathbf{S} matrix has converged. The criterion labeled R is compared to the p -value to test convergence of the parameters.

The R convergence measure cannot be computed accurately in the special case of singular residuals (when all the residuals are close to 0) or in the case of a 0 objective value. When either the trace of the \mathbf{S} matrix computed from the current residuals (trace(S)) or the objective value is less than the value of the SINGULAR= option, convergence is assumed.

The various convergence measures are explained in the following:

R is the primary convergence measure for the parameters. It measures the degree to which the residuals are orthogonal to the Jacobian columns, and it approaches 0 as the gradient of the objective function becomes small. R is defined as the square root of

$$\frac{(r'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{X}(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})\mathbf{X})^{-1}\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{W})r)}{(r'(\mathbf{S}^{-1} \otimes \mathbf{W})r)}$$

where \mathbf{X} is the Jacobian matrix and \mathbf{r} is the residuals vector. R is similar to the relative offset orthogonality convergence criterion proposed by Bates and Watts (1981).

In the univariate case, the R measure has several equivalent interpretations:

- the cosine of the angle between the residuals vector and the column space of the Jacobian matrix. When this cosine is 0, the residuals are orthogonal to the partial derivatives of the predicted values with respect to the parameters, and the gradient of the objective function is 0.
- the square root of the R^2 for the current linear pseudo-model in the residuals
- a norm of the gradient of the objective function, where the norming matrix is proportional to the current estimate of the covariance of the parameter estimates. Thus, using R, convergence is judged when the gradient becomes small in this norm.
- the prospective relative change in the objective function value expected from the next GAUSS step, assuming that the current linearization of the model is a good local approximation.

In the multivariate case, R is somewhat more complicated but is designed to go to 0 as the gradient of the objective becomes small and can still be given the previous interpretations for the aggregation of the equations weighted by \mathbf{S}^{-1} .

PPC is the prospective parameter change measure. PPC measures the maximum relative change in the parameters implied by the parameter-change vector computed for the next iteration. At the k th iteration, PPC is the maximum over the parameters

$$\frac{|\theta_i^{k+1} - \theta_i^k|}{|\theta_i^k| + 10^{-6}}$$

where θ_i^k is the current value of the i th parameter and θ_i^{k+1} is the prospective value of this parameter after adding the change vector computed for the next iteration. The parameter with the maximum prospective relative change is printed with the value of PPC, unless the PPC is nearly 0.

RPC is the retrospective parameter change measure. RPC measures the maximum relative change in the parameters from the previous iteration. At the k th iteration, RPC is the maximum over i of

$$\frac{|\theta_i^k - \theta_i^{k-1}|}{|\theta_i^{k-1}| + 10^{-6}}$$

where θ_i^k is the current value of the i th parameter and θ_i^{k-1} is the previous value of this parameter. The name of the parameter with the maximum retrospective relative change is printed with the value of RPC, unless the RPC is nearly 0.

OBJECT measures the relative change in the objective function value between iterations:

$$\frac{|O^k - O^{k-1}|}{|O^{k-1}| + 10^{-6}}$$

where O^{k-1} is the value of the objective function (O^k) from the previous iteration.

S measures the relative change in the **S** matrix. S is computed as the maximum over i, j of

$$\frac{|S_{ij}^k - S_{ij}^{k-1}|}{|S_{ij}^{k-1}| + 10^{-6}}$$

where S^{k-1} is the previous **S** matrix. The S measure is relevant only for estimation methods that iterate the **S** matrix.

An example of the convergence criteria output is shown in [Figure 19.23](#).

Figure 19.23 Convergence Criteria Output

Final Convergence Criteria	
R	0.000737
PPC (b)	0.003943
RPC (b)	0.00968
Object	4.784E-6
Trace (S)	0.533325
Objective Value	0.522214

The Trace(S) is the trace (the sum of the diagonal elements) of the **S** matrix computed from the current residuals. This row is labeled MSE if there is only one equation.

Troubleshooting Convergence Problems

As with any nonlinear estimation routine, there is no guarantee that the estimation will be successful for a given model and data. If the equations are linear with respect to the parameters, the parameter estimates always converge in one iteration. The methods that iterate the **S** matrix must iterate further for the **S** matrix to converge. Nonlinear models might not necessarily converge.

Convergence can be expected only with fully identified parameters, adequate data, and starting values sufficiently close to solution estimates.

Convergence and the rate of convergence might depend primarily on the choice of starting values for the estimates. This does not mean that a great deal of effort should be invested in choosing starting values. First, try the default values. If the estimation fails with these starting values, examine the model and data and rerun the estimation using reasonable starting values. It is usually not necessary that the starting values be very good, just that they not be very bad; choose values that seem plausible for the model and data.

An Example of Requiring Starting Values

Suppose you want to regress a variable Y on a variable X , assuming that the variables are related by the following nonlinear equation:

$$y = a + bx^c + \epsilon$$

In this equation, Y is linearly related to a power transformation of X . The unknown parameters are a , b , and c . ϵ is an unobserved random error. The following SAS statements generate simulated data. In this simulation, $a = 10$, $b = 2$, and the use of the SQRT function corresponds to $c = .5$.

```
data test;
  do i = 1 to 20;
    x = 5 * ranuni(1234);
    y = 10 + 2 * sqrt(x) + .5 * rannor(1234);
    output;
  end;
run;
```

The following statements specify the model and give descriptive labels to the model parameters. Then the FIT statement attempts to estimate a , b , and c by using the default starting value 0.0001.

```
proc model data=test;
  y = a + b * x ** c;
  label a = "Intercept"
        b = "Coefficient of Transformed X"
        c = "Power Transformation Parameter";
  fit y;
run;
```

PROC MODEL prints model summary and estimation problem summary reports and then prints the output shown in Figure 19.24.

Figure 19.24 Diagnostics for Convergence Failure

The MODEL Procedure									
OLS Estimation									
ERROR: The parameter estimates failed to converge for OLS after 100 iterations using CONVERGE=0.001 as the convergence criteria.									
The MODEL Procedure									
OLS Estimation									
	Iteration	N	Obs	R	Objective	Subit	a	b	c
OLS	100	20	0.9627	3.9678	2	137.3822	-126.533	-0.00213	
Gauss Method Parameter Change Vector									
	a	b	c						
	-69369.08	69368.01	-1.16						

By using the default starting values, PROC MODEL is unable to take even the first step in iterating to the solution. The change in the parameters that the Gauss-Newton method computes is very extreme and makes the objective values worse instead of better. Even when this step is shortened by a factor of a million, the objective function is still worse, and PROC MODEL is unable to estimate the model parameters.

The problem is caused by the starting value of C. Using the default starting value $C=0.0001$, the first iteration attempts to compute better values of A and B by what is, in effect, a linear regression of Y on the 10,000th root of X, which is almost the same as the constant 1. Thus the matrix that is inverted to compute the changes is nearly singular and affects the accuracy of the computed parameter changes.

This is also illustrated by the next part of the output, which displays collinearity diagnostics for the crossproducts matrix of the partial derivatives with respect to the parameters, shown in [Figure 19.25](#).

Figure 19.25 Collinearity Diagnostics

Collinearity Diagnostics					
Number	Eigenvalue	Condition Number	-----Proportion of Variation-----		
			a	b	c
1	2.376793	1.0000	0.0000	0.0000	0.0000
2	0.623207	1.9529	0.0000	0.0000	0.0000
3	1.68475E-12	1187758	1.0000	1.0000	1.0000

This output shows that the matrix is singular and that the partials of A, B, and C with respect to the residual are collinear at the point (0.0001, 0.0001, 0.0001) in the parameter space. See the section “[Linear Dependencies](#)” on page 1119 for a full explanation of the collinearity diagnostics.

The MODEL procedure next prints the note shown in [Figure 19.26](#), which suggests that you try different starting values.

Figure 19.26 Estimation Failure Note

NOTE: The parameter estimation is abandoned. Check your model and data. If the model is correct and the input data are appropriate, try rerunning the parameter estimation using different starting values for the parameter estimates.

PROC MODEL continues as if the parameter estimates had converged.

PROC MODEL then produces the usual printout of results for the nonconverged parameter values. The estimation summary is shown in [Figure 19.27](#). The heading includes the reminder “(Not Converged)”.

Figure 19.27 Nonconverged Estimation Summary

The MODEL Procedure	
OLS Estimation Summary (Not Converged)	
Data Set Options	
DATA=	TEST

Figure 19.27 *continued*

Minimization Summary	
Parameters Estimated	3
Method	Gauss
Iterations	100
Subiterations	239
Average Subiterations	2.39
Final Convergence Criteria	
R	0.962666
PPC(b)	548.2193
RPC(b)	540.3066
Object	2.654E-6
Trace(S)	4.667946
Objective Value	3.967754
Observations Processed	
Read	20
Solved	20

The nonconverged estimation results are shown in Figure 19.28.

Figure 19.28 Nonconverged Results

The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors (Not Converged)							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
y	3	17	79.3551	4.6679	2.1605	-1.6812	-1.9966

Note that the R^2 statistic is negative. An $R^2 < 0$ results when the residual mean squared error for the model is larger than the variance of the dependent variable. Negative R^2 statistics might be produced when either the parameter estimates fail to converge correctly, as in this case, or when the correctly estimated model fits the data very poorly.

Controlling Starting Values

To fit the preceding model you must specify a better starting value for C. Avoid starting values of C that are either very large or close to 0. For starting values of A and B, you can specify values, use the default, or have PROC MODEL fit starting values for them conditional on the starting value for C.

Starting values are specified with the START= option of the FIT statement or in a PARMS statement. In PROC MODEL, you have several options to specify starting values for the parameters to be estimated.

When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. When no starting values for the parameter estimates are specified with BY group processing, the default start value 0.0001 is used for each by group. Again, when no starting values are specified, and a model with a FIT statement is stored by the OUTMODEL=*outmodel-filename* option in a previous step, the *outmodel-filename* can be invoked in a subsequent PROC MODEL step by using the MODEL=*outmodel-filename* option with multiple estimation methods in the second step. In such a case, the parameter estimates from the *outmodel-filename* are used directly as starting values for OLS, and OLS results from the second step provide starting values for the subsequent estimation method such as 2SLS or SUR, provided that NOOLS is not specified.

For example, the following statements estimate the model parameters by using the starting values A=0.0001, B=0.0001, and C=5.

```
proc model data=test;
  y = a + b * x ** c;
  label a = "Intercept"
        b = "Coefficient of Transformed X"
        c = "Power Transformation Parameter";
  fit y start=(c=5);
run;
```

Using these starting values, the estimates converge in 16 iterations. The results are shown in [Figure 19.29](#). Note that since the START= option explicitly declares parameters, the parameter C is placed first in the table.

Figure 19.29 Converged Results

The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
y	3	17	5.7359	0.3374	0.5809	0.8062	0.7834
Nonlinear OLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label		
c	0.327079	0.2892	1.13	0.2738	Power Transformation Parameter		
a	8.384311	3.3775	2.48	0.0238	Intercept		
b	3.505391	3.4858	1.01	0.3287	Coefficient of Transformed X		

Using the STARTITER Option

PROC MODEL can compute starting values for some parameters conditional on starting values you specify for the other parameters. You supply starting values for some parameters and specify the STARTITER option on the FIT statement.

For example, the following statements set C to 1 and compute starting values for A and B by estimating these parameters conditional on the fixed value of C. With C=1, this is equivalent to computing A and B by linear regression on X. A PARMS statement is used to declare the parameters in alphabetical order. The ITPRINT option is used to print the parameter values at each iteration.

```
proc model data=test;
  parms a b c;
  y = a + b * x ** c;
  label a = "Intercept"
        b = "Coefficient of Transformed X"
        c = "Power Transformation Parameter";
  fit y start=(c=1) / startiter itprint;
run;
```

With better starting values, the estimates converge in only eight iterations. Counting the iteration required to compute the starting values for A and B, this is seven fewer than the 16 iterations required without the STARTITER option. The iteration history listing is shown in [Figure 19.30](#).

Figure 19.30 ITPRINT Listing

The MODEL Procedure									
OLS Estimation									
	Iteration	N	Obs	R	Objective	Subit	a	b	c
GRID	0	20	0.9989		162.9	0	0.00010	0.00010	1.00000
GRID	1	20	0.0000		0.3464	0	10.96530	0.77007	1.00000

	Iteration	N	Obs	R	Objective	Subit	a	b	c
OLS	0	20	0.3873		0.3464	0	10.96530	0.77007	1.00000
OLS	1	20	0.3339		0.3282	2	10.75993	0.99433	0.83096
OLS	2	20	0.3244		0.3233	1	10.46894	1.31205	0.66810
OLS	3	20	0.3151		0.3197	1	10.11707	1.69149	0.54626
OLS	4	20	0.2764		0.3110	1	9.74691	2.08492	0.46615
OLS	5	20	0.2379		0.3040	0	9.06175	2.80546	0.36575
OLS	6	20	0.0612		0.2879	0	8.51825	3.36746	0.33201
OLS	7	20	0.0022		0.2868	0	8.39485	3.49449	0.32776
OLS	8	20	0.0001		0.2868	0	8.38467	3.50502	0.32711

NOTE: At OLS Iteration 8 CONVERGE=0.001 Criteria Met.

The results produced in this case are almost the same as the results shown in [Figure 19.29](#), except that the PARMS statement causes the parameter estimates table to be ordered A, B, C instead of C, A, B. They are not exactly the same because the different starting values caused the iterations to converge at a slightly different place. This effect is controlled by changing the convergence criterion with the CONVERGE= option.

By default, the STARTITER option performs one iteration to find starting values for the parameters that are not given values. In this case, the model is linear in A and B, so only one iteration is needed. If A or B were nonlinear, you could specify more than one “starting values” iteration by specifying a number for the STARTITER= option.

Finding Starting Values by Grid Search

PROC MODEL can try various combinations of parameter values and use the combination that produces the smallest objective function value as starting values. (For OLS the objective function is the residual mean square.) This is known as a preliminary *grid search*. You can combine the STARTITER option with a grid search.

For example, the following statements try five different starting values for C: 1, 0.7, 0.5, 0.3, and 0. For each value of C, values for A and B are estimated. The combination of A, B, and C values that produce the smallest residual mean square is then used to start the iterative process.

```
proc model data=test;
  parms a b c;
  y = a + b * x ** c;
  label a = "Intercept"
        b = "Coefficient of Transformed X"
        c = "Power Transformation Parameter";
  fit y start=(c=1 .7 .5 .3 0) / startiter itprint;
run;
```

The iteration history listing is shown in [Figure 19.31](#). Using the best starting values found by the grid search, the OLS estimation only requires two iterations. However, since the grid search required nine iterations, the total iterations in this case is 11.

Figure 19.31 ITPRINT Listing

The MODEL Procedure									
OLS Estimation									
	Iteration	N	Obs	R	Objective	Subit	a	b	c
GRID	0	20	0.9989	162.9	0	0.00010	0.00010	1.00000	
GRID	1	20	0.0000	0.3464	0	10.96530	0.77007	1.00000	
GRID	0	20	0.7587	0.7242	0	10.96530	0.77007	0.70000	
GRID	1	20	0.0000	0.3073	0	10.41027	1.36141	0.70000	
GRID	0	20	0.7079	0.5843	0	10.41027	1.36141	0.50000	
GRID	1	20	0.0000	0.2915	0	9.69319	2.13103	0.50000	
GRID	0	20	0.7747	0.7175	0	9.69319	2.13103	0.30000	
GRID	1	20	0.0000	0.2869	0	8.04397	3.85767	0.30000	
GRID	0	20	0.5518	2.1277	0	8.04397	3.85767	0.00000	
GRID	1	20	0.0000	1.4799	0	8.04397	4.66255	0.00000	

Figure 19.31 *continued*

	Iteration	N	Obs	R	Objective	Subit	N	a	b	c
OLS	0	20	0.0189	0.2869	0	8.04397	3.85767	0.30000		
OLS	1	20	0.0158	0.2869	0	8.35023	3.54145	0.32233		
OLS	2	20	0.0006	0.2868	0	8.37468	3.51540	0.32622		

NOTE: At OLS Iteration 2 CONVERGE=0.001 Criteria Met.

Because no initial values for A or B were provided in the PARAMETERS statement or were read in with a PARMSDATA= or ESTDATA= option, A and B were given the default value of 0.0001 for the first iteration. At the second grid point, C=5, the values of A and B obtained from the previous iterations are used for the initial iteration. If initial values are provided for parameters, the parameters start at those initial values at each grid point.

Guessing Starting Values from the Logic of the Model

Example 19.1, which uses a logistic growth curve model of the U.S. population, illustrates the need for reasonable starting values. This model can be written

$$pop = \frac{a}{1 + \exp(b - c(t - 1790))}$$

where t is time in years. The model is estimated by using decennial census data of the U.S. population in millions. If this simple but highly nonlinear model is estimated by using the default starting values, the estimation fails to converge.

To find reasonable starting values, first consider the meaning of a and c . Taking the limit as time increases, a is the limiting or maximum possible population. So, as a starting value for a , several times the most recent population known can be used—for example, one billion (1000 million).

Dividing the time derivative by the function to find the growth rate and taking the limit as t moves into the past, you can determine that c is the initial growth rate. You can examine the data and compute an estimate of the growth rate for the first few decades, or you can pick a number that sounds like a plausible population growth rate figure, such as 2%.

To find a starting value for b , let t equal the base year used, 1790, which causes c to drop out of the formula for that year, and then solve for the value of b that is consistent with the known population in 1790 and with the starting value of a . This yields $b = \ln(a/3.9 - 1)$ or about 5.5, where a is 1000 and 3.9 is roughly the population for 1790 given in the data. The estimates converge using these starting values.

Convergence Problems

When estimating nonlinear models, you might encounter some of the following convergence problems.

Unable to Improve

The optimization algorithm might be unable to find a step that improves the objective function. If this happens in the Gauss-Newton method, the step size is halved to find a change vector for which the objective improves. In the Marquardt method, λ is increased to find a change vector for which the objective improves. If, after MAXSUBITER= step-size halvings or increases in λ , the change vector still does not produce a better objective value, the iterations are stopped and an error message is printed.

Failure of the algorithm to improve the objective value can be caused by a CONVERGE= value that is too small. Look at the convergence measures reported at the point of failure. If the estimates appear to be approximately converged, you can accept the NOT CONVERGED results reported, or you can try rerunning the FIT task with a larger CONVERGE= value.

If the procedure fails to converge because it is unable to find a change vector that improves the objective value, check your model and data to ensure that all parameters are identified and data values are reasonably scaled. Then, rerun the model with different starting values. Also, consider using the Marquardt method if the Gauss-Newton method fails; the Gauss-Newton method can get into trouble if the Jacobian matrix is nearly singular or ill-conditioned. Keep in mind that a nonlinear model may be well-identified and well-conditioned for parameter values close to the solution values but unidentified or numerically ill-conditioned for other parameter values. The choice of starting values can make a big difference.

Nonconvergence

The estimates might diverge into areas where the program overflows or the estimates might go into areas where function values are illegal or too badly scaled for accurate calculation. The estimation might also take steps that are too small or that make only marginal improvement in the objective function and thus fail to converge within the iteration limit.

When the estimates fail to converge, collinearity diagnostics for the Jacobian crossproducts matrix are printed if there are 20 or fewer parameters estimated. See the section “[Linear Dependencies](#)” on page 1119 for an explanation of these diagnostics.

Inadequate Convergence Criterion

If convergence is obtained, the resulting estimates approximate only a minimum point of the objective function. The statistical validity of the results is based on the exact minimization of the objective function, and for nonlinear models the quality of the results depends on the accuracy of the approximation of the minimum. This is controlled by the convergence criterion used.

There are many nonlinear functions for which the objective function is quite flat in a large region around the minimum point so that many quite different parameter vectors might satisfy a weak convergence criterion. By using different starting values, different convergence criteria, or different minimization methods, you can produce very different estimates for such models.

You can guard against this by running the estimation with different starting values and different convergence criteria and checking that the estimates produced are essentially the same. If they are not, use a smaller CONVERGE= value.

Local Minimum

You might have converged to a local minimum rather than a global one. This problem is difficult to detect because the procedure appears to have succeeded. You can guard against this by running the estimation with different starting values or with a different minimization technique. The `START=` option can be used to automatically perform a grid search to aid in the search for a global minimum.

Discontinuities

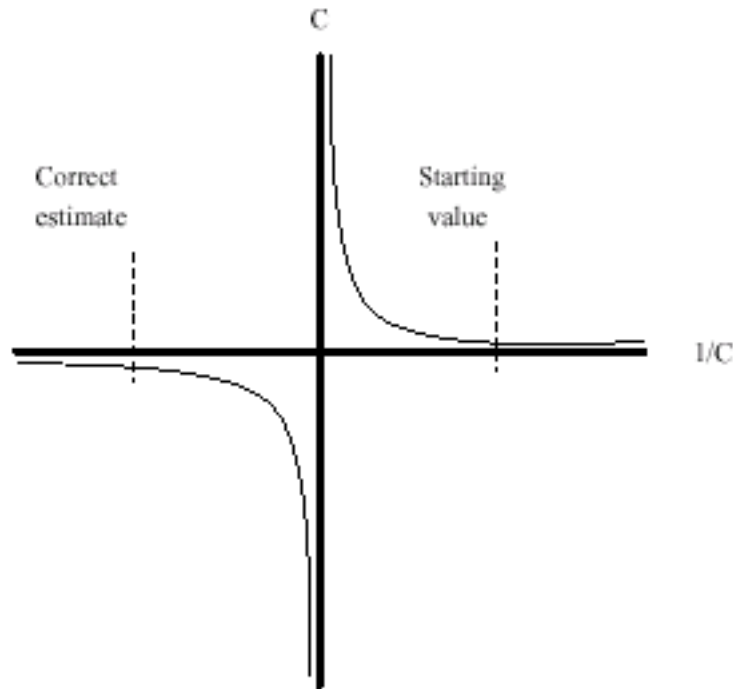
The computational methods assume that the model is a continuous and smooth function of the parameters. If this is not the case, the methods might not work.

If the model equations or their derivatives contain discontinuities, the estimation usually succeeds, provided that the final parameter estimates lie in a continuous interval and that the iterations do not produce parameter values at points of discontinuity or parameter values that try to cross asymptotes.

One common case of discontinuities causing estimation failure is that of an asymptotic discontinuity between the final estimates and the initial values. For example, consider the following model, which is basically linear but is written with one parameter in reciprocal form:

$$y = a + b * x1 + x2 / c;$$

By placing the parameter `C` in the denominator, a singularity is introduced into the parameter space at `C=0`. This is not necessarily a problem, but if the correct estimate of `C` is negative while the starting value is positive (or vice versa), the asymptotic discontinuity at 0 will lie between the estimate and the starting value. This means that the iterations have to pass through the singularity to get to the correct estimates. The situation is shown in [Figure 19.32](#).

Figure 19.32 Asymptotic Discontinuity

Because of the incorrect sign of the starting value, the C estimate goes off towards positive infinity in a vain effort to get past the asymptote and onto the correct arm of the hyperbola. As the computer is required to work with ever closer approximations to infinity, the numerical calculations break down and an “objective function was not improved” convergence failure message is printed. At this point, the iterations terminate with an extremely large positive value for C . When the sign of the starting value for C is changed, the estimates converge quickly to the correct values.

Linear Dependencies

In some cases, the Jacobian matrix might not be of full rank; parameters might not be fully identified for the current parameter values with the current data. When linear dependencies occur among the derivatives of the model, some parameters appear with a standard error of 0 and with the word **BIASED** printed in place of the t statistic. When this happens, collinearity diagnostics for the Jacobian crossproducts matrix are printed if the **DETAILS** option is specified and there are twenty or fewer parameters estimated. Collinearity diagnostics are also printed out automatically when a minimization method fails, or when the **COLLIN** option is specified.

For each parameter, the proportion of the variance of the estimate accounted for by each *principal component* is printed. The principal components are constructed from the eigenvalues and eigenvectors of the correlation matrix (scaled covariance matrix). When collinearity exists, a principal component is associated with proportion of the variance of more than one parameter. The numbers reported are proportions so they remain between 0 and 1. If two or more parameters have large proportion values associated with the same

principal component, then two problems can occur: the computation of the parameter estimates are slow or nonconvergent; and the parameter estimates have inflated variances (Belsley, Kuh, and Welsch 1980, p. 105–117).

For example, the following cubic model is fit to a quadratic data set:

```
proc model data=test3;
  exogenous x1;
  parms b1 a1 c1 ;
  y1 = a1 * x1 + b1 * x1 * x1 + c1 * x1 * x1 *x1;
  fit y1 / collin;
run;
```

The collinearity diagnostics are shown in Figure 19.33.

Figure 19.33 Collinearity Diagnostics

The MODEL Procedure					
Collinearity Diagnostics					
Number	Eigenvalue	Condition Number	-----Proportion of Variation-----		
			b1	a1	c1
1	2.942920	1.0000	0.0001	0.0004	0.0002
2	0.056638	7.2084	0.0001	0.0357	0.0148
3	0.000442	81.5801	0.9999	0.9639	0.9850

Notice that the proportions associated with the smallest eigenvalue are almost 1. For this model, removing any of the parameters decreases the variances of the remaining parameters.

In many models, the collinearity might not be clear cut. Collinearity is not necessarily something you remove. A model might need to be reformulated to remove the redundant parameterization, or the limitations on the estimability of the model can be accepted. The GINV=G4 option can be helpful to avoid problems with convergence for models containing collinearities.

Collinearity diagnostics are also useful when an estimation does not converge. The diagnostics provide insight into the numerical problems and can suggest which parameters need better starting values. These diagnostics are based on the approach of Belsley, Kuh, and Welsch (1980).

Iteration History

The options ITPRINT, ITDETAILS, XPX, I, and ITALL specify a detailed listing of each iteration of the minimization process.

ITPRINT Option

The ITPRINT information is selected whenever any iteration information is requested.

The following information is displayed for each iteration:

N	is the number of usable observations.
Objective	is the corrected objective function value.
Trace(S)	is the trace of the S matrix.
subit	is the number of subiterations required to find a λ or a damping factor that reduces the objective function.
R	is the R convergence measure.

The estimates for the parameters at each iteration are also printed.

ITDETAILS Option

The additional values printed for the ITDETAILS option are:

Theta	is the angle in degrees between Δ , the parameter change vector, and the negative gradient of the objective function.
Phi	is the directional derivative of the objective function in the Δ direction scaled by the objective function.
Stepsize	is the value of the damping factor used to reduce Δ if the Gauss-Newton method is used.
Lambda	is the value of λ if the Marquardt method is used.
Rank(XPX)	is the rank of the X'X matrix (output if the projected Jacobian crossproducts matrix is singular).

The definitions of PPC and R are explained in the section “[Convergence Criteria](#)” on page 1107. When the values of PPC are large, the parameter associated with the criteria is displayed in parentheses after the value.

XPX and I Options

The XPX and the I options select the printing of the augmented **X'X** matrix and the augmented **X'X** matrix after a *sweep* operation (Goodnight 1979) has been performed on it. An example of the output from the following statements is shown in [Figure 19.34](#).

```
proc model data=test2;
  y1 = a1 * x2 * x2 - exp( d1*x1);
  y2 = a2 * x1 * x1 + b2 * exp( d2*x2);
  fit y1 y2 / itall XPX I ;
run;
```

Figure 19.34 XPX and I Options Output

The MODEL Procedure						
OLS Estimation						
Cross Products for System At OLS Iteration 0						
	a1	d1	a2	b2	d2	Residual
a1	1839468	-33818.35	0.0	0.00	0.000000	3879959
d1	-33818	1276.45	0.0	0.00	0.000000	-76928
a2	0	0.00	42925.0	1275.15	0.154739	470686
b2	0	0.00	1275.2	50.01	0.003867	16055
d2	0	0.00	0.2	0.00	0.000064	2
Residual	3879959	-76928.14	470686.3	16055.07	2.329718	24576144
XPX Inverse for System At OLS Iteration 0						
	a1	d1	a2	b2	d2	Residual
a1	0.000001	0.000028	0.000000	0.0000	0.00	2
d1	0.000028	0.001527	0.000000	0.0000	0.00	-9
a2	0.000000	0.000000	0.000097	-0.0025	-0.08	6
b2	0.000000	0.000000	-0.002455	0.0825	0.95	172
d2	0.000000	0.000000	-0.084915	0.9476	15746.71	11931
Residual	1.952150	-8.546875	5.823969	171.6234	11930.89	10819902

The first matrix, labeled “Cross Products,” for OLS estimation is

$$\begin{bmatrix} \mathbf{X}'\mathbf{X} & \mathbf{X}'\mathbf{r} \\ \mathbf{r}'\mathbf{X} & \mathbf{r}'\mathbf{r} \end{bmatrix}$$

The column labeled Residual in the output is the vector $\mathbf{X}'\mathbf{r}$, which is the gradient of the objective function. The diagonal scalar value $\mathbf{r}'\mathbf{r}$ is the objective function uncorrected for degrees of freedom. The second matrix, labeled “XPX Inverse,” is created through a sweep operation on the augmented $\mathbf{X}'\mathbf{X}$ matrix to get:

$$\begin{bmatrix} (\mathbf{X}'\mathbf{X})^{-1} & (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{r} \\ (\mathbf{X}'\mathbf{r})'(\mathbf{X}'\mathbf{X})^{-1} & \mathbf{r}'\mathbf{r} - (\mathbf{X}'\mathbf{r})'(\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{r} \end{bmatrix}$$

Note that the residual column is the change vector used to update the parameter estimates at each iteration. The corner scalar element is used to compute the R convergence criteria.

ITALL Option

The ITALL option, in addition to causing the output of all of the preceding options, outputs the \mathbf{S} matrix, the inverse of the \mathbf{S} matrix, the CROSS matrix, and the swept CROSS matrix. An example of a portion of the CROSS matrix for the preceding example is shown in [Figure 19.35](#).

Figure 19.35 ITALL Option Crossproducts Matrix Output

The MODEL Procedure				
OLS Estimation				
Crossproducts Matrix At OLS Iteration 0				
	1	@PRED.y1/@a1	@PRED.y1/@d1	@PRED.y2/@a2
1	50.00	6409	-239.16	1275.0
@PRED.y1/@a1	6409.08	1839468	-33818.35	187766.1
@PRED.y1/@d1	-239.16	-33818	1276.45	-7253.0
@PRED.y2/@a2	1275.00	187766	-7253.00	42925.0
@PRED.y2/@b2	50.00	6410	-239.19	1275.2
@PRED.y2/@d2	0.00	1	-0.03	0.2
RESID.y1	14699.97	3879959	-76928.14	420582.9
RESID.y2	16052.76	4065028	-85083.68	470686.3
Crossproducts Matrix At OLS Iteration 0				
	@PRED.y2/@b2	@PRED.y2/@d2	RESID.y1	RESID.y2
1	50.00	0.003803	14700	16053
@PRED.y1/@a1	6409.88	0.813934	3879959	4065028
@PRED.y1/@d1	-239.19	-0.026177	-76928	-85084
@PRED.y2/@a2	1275.15	0.154739	420583	470686
@PRED.y2/@b2	50.01	0.003867	14702	16055
@PRED.y2/@d2	0.00	0.000064	2	2
RESID.y1	14701.77	1.820356	11827102	12234106
RESID.y2	16055.07	2.329718	12234106	12749042

Computer Resource Requirements

If you are estimating large systems, you need to be aware of how PROC MODEL uses computer resources (such as memory and the CPU) so they can be used most efficiently.

Saving Time with Large Data Sets

If your input data set has many observations, the FIT statement performs a large number of model program executions. A pass through the data is made at least once for each iteration and the model program is executed once for each observation in each pass. If you refine the starting estimates by using a smaller data set, the final estimation with the full data set might require fewer iterations.

For example, you could use

```
proc model;
  /* Model goes here */
  fit / data=a(obs=25);
  fit / data=a;
```

where OBS=25 selects the first 25 observations in A. The second FIT statement produces the final estimates using the full data set and starting values from the first run.

Fitting the Model in Sections to Save Space and Time

If you have a very large model (with several hundred parameters, for example), the procedure uses considerable space and time. You might be able to save resources by breaking the estimation process into several steps and estimating the parameters in subsets.

You can use the FIT statement to select for estimation only the parameters for selected equations. Do not break the estimation into too many small steps; the total computer time required is minimized by compromising between the number of FIT statements that are executed and the size of the crossproducts matrices that must be processed.

When the parameters are estimated for selected equations, the entire model program must be executed even though only a part of the model program might be needed to compute the residuals for the equations selected for estimation. If the model itself can be broken into sections for estimation (and later combined for simulation and forecasting), then more resources can be saved.

For example, to estimate the following four equation model in two steps, you could use

```
proc model data=a outmodel=part1;
  parms a0-a2 b0-b2 c0-c3 d0-d3;
  y1 = a0 + a1*y2 + a2*x1;
  y2 = b0 + b1*y1 + b2*x2;
  y3 = c0 + c1*y1 + c2*y4 + c3*x3;
  y4 = d0 + d1*y1 + d2*y3 + d3*x4;
  fit y1 y2;
  fit y3 y4;
  fit y1 y2 y3 y4;
run;
```

You should try estimating the model in pieces to save time only if there are more than 14 parameters; the preceding example takes more time, not less, and the difference in memory required is trivial.

Memory Requirements for Parameter Estimation

PROC MODEL is a large program, and it requires much memory. Memory is also required for the SAS System, various data areas, the model program and associated tables and data vectors, and a few crossproducts matrices. For most models, the memory required for PROC MODEL itself is much larger than that required for the model program, and the memory required for the model program is larger than that required for the crossproducts matrices.

The number of bytes needed for two crossproducts matrices, four **S** matrices, and three parameter covariance matrices is

$$8 \times (2 + k + m + g)^2 + 16 \times g^2 + 12 \times (p + 1)^2$$

plus lower-order terms, where m is the number of unique nonzero derivatives of each residual with respect to each parameter, g is the number of equations, k is the number of instruments, and p is the number of parameters. This formula is for the memory required for 3SLS. If you are using OLS, a reasonable estimate of the memory required for large problems (greater than 100 parameters) is to divide the value obtained from the formula in half.

Consider the following model program.

```
proc model data=test2 details;
  exogenous x1 x2;
  parms b1 100 a1 a2 b2 2.5 c2 55;
  y1 = a1 * y2 + b1 * x1 * x1;
  y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2;
  fit y1 y2 / n3sls memoryuse;
  inst b1 b2 c2 x1 ;
run;
```

The DETAILS option prints the storage requirements information shown in Figure 19.36.

Figure 19.36 Storage Requirements Information

The MODEL Procedure	
Storage Requirements for this Problem	
Order of XPX Matrix	6
Order of S Matrix	2
Order of Cross Matrix	13
Total Nonzero Derivatives	5
Distinct Variable Derivatives	5
Size of Cross matrix	728

The matrix $\mathbf{X}'\mathbf{X}$ augmented by the residual vector is called the XPX matrix in the output, and it has the size $m + 1$. The order of the \mathbf{S} matrix, 2 for this example, is the value of g . The CROSS matrix is made up of the k unique instruments, a constant column that represents the intercept terms, followed by the m unique Jacobian variables plus a constant column that represents the parameters with constant derivatives, followed by the g residuals.

The size of two CROSS matrices in bytes is

$$8 \times (2 + k + m + g)^2 + 2 + k + m + g$$

Note that the CROSS matrix is symmetric, so only the diagonal and the upper triangular part of the matrix is stored. For examples of the CROSS and XPX matrices see the section “[Iteration History](#)” on page 1120.

The MEMORYUSE Option

The MEMORYUSE option in the FIT, SOLVE, MODEL, or RESET statement can be used to request a comprehensive memory usage summary.

Figure 19.37 shows an example of the output produced by the MEMORYUSE option.

Figure 19.37 MEMORYUSE Option Output for FIT Task

Memory Usage Summary (in bytes)	
Symbols	15652
Strings	2593
Lists	2412
Arrays	2112
Statements	2448
Opcodes	1840
Parsing	6180
Executable	12716
Block option	0
Cross reference	0
Flow analysis	336
Derivatives	28640
Data vector	368
Cross matrix	1480
X'X matrix	590
S matrix	144
GMM memory	0
Jacobian	0
Work vectors	702
Overhead	14110

Total	92323

Definitions of the memory components follow:

symbols	memory used to store information about variables in the model
strings	memory used to store the variable names and labels
lists	space used to hold lists of variables
arrays	memory used by ARRAY statements
statements	memory used for the list of programming statements in the model
opcodes	memory used to store the code compiled to evaluate the expression in the model program
parsing	memory used in parsing the SAS statements
executable	the compiled model program size
block option	memory used by the BLOCK option
cross ref.	memory used by the XREF option
flow analysis	memory used to compute the interdependencies of the variables
derivatives	memory used to compute and store the analytical derivatives
data vector	memory used for the program data vector
cross matrix	memory used for one or more copies of the CROSS matrix
X'X matrix	memory used for one or more copies of the X'X matrix
S matrix	memory used for the covariance matrix
GMM memory	additional memory used for the GMM and ITGMM methods
Jacobian	memory used for the Jacobian matrix for SOLVE and FIML
work vectors	memory used for miscellaneous work vectors
overhead	other miscellaneous memory

Testing for Normality

The NORMAL option in the FIT statement performs multivariate and univariate tests of normality.

The three multivariate tests provided are Mardia's skewness test and kurtosis test (Mardia 1970) and the Henze-Zirkler $T_{n,\beta}$ test (Henze and Zirkler 1990). The two univariate tests provided are the Shapiro-Wilk W test and the Kolmogorov-Smirnov test. (For details on the univariate tests, refer to "Goodness-of-Fit Tests" section in "The UNIVARIATE Procedure" chapter in the *Base SAS Procedures Guide*.) The null hypothesis for all these tests is that the residuals are normally distributed.

For a random sample X_1, \dots, X_n , $X_i \in \mathbb{R}^d$, where d is the dimension of X_i and n is the number of observations, a measure of multivariate skewness is

$$b_{1,d} = \frac{1}{n^2} \sum_{i=1}^n \sum_{j=1}^n [(X_i - \mu)' \mathbf{S}^{-1} (X_j - \mu)]^3$$

where \mathbf{S} is the sample covariance matrix of \mathbf{X} . For weighted regression, both \mathbf{S} and $(X_i - \mu)$ are computed by using the weights supplied by the WEIGHT statement or the _WEIGHT_ variable.

Mardia showed that under the null hypothesis $\frac{n}{6}b_{1,d}$ is asymptotically distributed as $\chi^2(d(d+1)(d+2)/6)$. For small samples, Mardia's skewness test statistic is calculated with a small sample correction formula, given by $\frac{nk}{6}b_{1,d}$ where the correction factor k is given by $k = (d+1)(n+1)(n+3)/n(((n+1)(d+1))-6)$. Mardia's skewness test statistic in PROC MODEL uses this small sample corrected formula.

A measure of multivariate kurtosis is given by

$$b_{2,d} = \frac{1}{n} \sum_{i=1}^n [(X_i - \mu)' \mathbf{S}^{-1} (X_i - \mu)]^2$$

Mardia showed that under the null hypothesis, $b_{2,d}$ is asymptotically normally distributed with mean $d(d+2)$ and variance $8d(d+2)/n$.

The Henze-Zirkler test is based on a nonnegative functional $D(.,.)$ that measures the distance between two distribution functions and has the property that

$$D(\mathbf{N}_d(0, I_d), Q) = 0$$

if and only if

$$Q = \mathbf{N}_d(0, I_d)$$

where $\mathbf{N}_d(\mu, \Sigma_d)$ is a d -dimensional normal distribution.

The distance measure $D(.,.)$ can be written as

$$D_\beta(P, Q) = \int_{\mathbb{R}^d} |\hat{P}(t) - \hat{Q}(t)|^2 \varphi_\beta(t) dt$$

where $\hat{P}(t)$ and $\hat{Q}(t)$ are the Fourier transforms of P and Q , and $\varphi_\beta(t)$ is a weight or a kernel function. The density of the normal distribution $\mathbf{N}_d(0, \beta^2 I_d)$ is used as $\varphi_\beta(t)$

$$\varphi_\beta(t) = (2\pi\beta^2)^{-\frac{d}{2}} \exp\left(\frac{-|t|^2}{2\beta^2}\right), t \in \mathbb{R}^d$$

where $|t| = (t' t)^{0.5}$.

The parameter β depends on n as

$$\beta_d(n) = \frac{1}{\sqrt{2}} \left(\frac{2d+1}{4} \right)^{1/(d+4)} n^{1/(d+4)}$$

The test statistic computed is called $T_\beta(d)$ and is approximately distributed as a lognormal. The lognormal distribution is used to compute the null hypothesis probability.

$$T_\beta(d) = \frac{1}{n^2} \sum_{j=1}^n \sum_{k=1}^n \exp\left(-\frac{\beta^2}{2} |Y_j - Y_k|^2\right) - 2(1 + \beta^2)^{-d/2} \frac{1}{n} \sum_{j=1}^n \exp\left(-\frac{\beta^2}{2(1 + \beta^2)} |Y_j|^2\right) + (1 + 2\beta^2)^{-d/2}$$

where

$$|Y_j - Y_k|^2 = (X_j - X_k)' \mathbf{S}^{-1} (X_j - X_k)$$

$$|Y_j|^2 = (X_j - \bar{X})' \mathbf{S}^{-1} (X_j - \bar{X})$$

Monte Carlo simulations suggest that $T_\beta(d)$ has good power against distributions with heavy tails.

The Shapiro-Wilk W test is computed only when the number of observations (n) is less than 2000 while computation of the Kolmogorov-Smirnov test statistic requires at least 2000 observations.

The following is an example of the output produced by the NORMAL option.

```
proc model data=test2;
  y1 = a1 * x2 * x2 - exp( d1*x1);
  y2 = a2 * x1 * x1 + b2 * exp( d2*x2);
  fit y1 y2 / normal ;
run;
```

Figure 19.38 Normality Test Output

The MODEL Procedure			
Normality Test			
Equation	Test Statistic	Value	Prob
y1	Shapiro-Wilk W	0.37	<.0001
y2	Shapiro-Wilk W	0.84	<.0001
System	Mardia Skewness	286.4	<.0001
	Mardia Kurtosis	31.28	<.0001
	Henze-Zirkler T	7.09	<.0001

Heteroscedasticity

One of the key assumptions of regression is that the variance of the errors is constant across observations. If the errors have constant variance, the errors are called *homoscedastic*. Typically, residuals are plotted to assess this assumption. Standard estimation methods are inefficient when the errors are *heteroscedastic* or have nonconstant variance.

Heteroscedasticity Tests

The MODEL procedure provides two tests for heteroscedasticity of the errors: White's test and the modified Breusch-Pagan test.

Both White's test and the Breusch-Pagan are based on the residuals of the fitted model. For systems of equations, these tests are computed separately for the residuals of each equation.

The residuals of an estimation are used to investigate the heteroscedasticity of the true disturbances.

The WHITE option tests the null hypothesis

$$H_0 : \sigma_i^2 = \sigma^2 \text{ for all } i$$

White's test is general because it makes no assumptions about the form of the heteroscedasticity (White 1980). Because of its generality, White's test might identify specification errors other than heteroscedasticity (Thursby 1982). Thus, White's test might be significant when the errors are homoscedastic but the model is misspecified in other ways.

White's test is equivalent to obtaining the error sum of squares for the regression of squared residuals on a constant and all the unique variables in $\mathbf{J} \otimes \mathbf{J}$, where the matrix \mathbf{J} is composed of the partial derivatives of the equation residual with respect to the estimated parameters. White's test statistic W is computed as follows:

$$W = nR^2$$

where R^2 is the correlation coefficient obtained from the above regression. The statistic is asymptotically distributed as chi-squared with $P-1$ degrees of freedom, where P is the number of regressors in the regression, including the constant and n is the total number of observations. In the example given below, the regressors are constant, income, income*income, income*income*income, and income*income*income*income. income*income occurs twice and one is dropped. Hence, $P=5$ with degrees of freedom, $P-1=4$.

Note that White's test in the MODEL procedure is different than White's test in the REG procedure requested by the SPEC option. The SPEC option produces the test from Theorem 2 on page 823 of White (1980). The WHITE option, on the other hand, produces the statistic discussed in Greene (1993).

The null hypothesis for the modified Breusch-Pagan test is homoscedasticity. The alternate hypothesis is that the error variance varies with a set of regressors, which are listed in the BREUSCH= option.

Define the matrix \mathbf{Z} to be composed of the values of the variables listed in the BREUSCH= option, such that $z_{i,j}$ is the value of the j th variable in the BREUSCH= option for the i th observation. The null hypothesis of the Breusch-Pagan test is

$$\sigma_i^2 = \sigma^2(\alpha_0 + \boldsymbol{\alpha}' \mathbf{z}_i) \qquad H_0 : \boldsymbol{\alpha} = \mathbf{0}$$

where σ_i^2 is the error variance for the i th observation and α_0 and α are regression coefficients.

The test statistic for the Breusch-Pagan test is

$$bp = \frac{1}{v} (\mathbf{u} - \bar{u}\mathbf{i})' \mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1} \mathbf{Z}' (\mathbf{u} - \bar{u}\mathbf{i})$$

where $\mathbf{u} = (e_1^2, e_2^2, \dots, e_n^2)$, \mathbf{i} is a $n \times 1$ vector of ones, and

$$v = \frac{1}{n} \sum_{i=1}^n (e_i^2 - \frac{\mathbf{e}'\mathbf{e}}{n})^2$$

This is a modified version of the Breusch-Pagan test, which is less sensitive to the assumption of normality than the original test (Greene 1993, p. 395).

The statements in the following example produce the output in Figure 19.39:

```
proc model data=schools;
    parms const inc inc2;

    exp = const + inc * income + inc2 * income * income;
    incsq = income * income;

    fit exp / white breusch=(1 income incsq);
run;
```

Figure 19.39 Output for Heteroscedasticity Tests

The MODEL Procedure					
Heteroscedasticity Test					
Equation	Test	Statistic	DF	Pr > ChiSq	Variables
exp	White's Test	21.16	4	0.0003	Cross of all vars
	Breusch-Pagan	15.83	2	0.0004	1, income, incsq

Correcting for Heteroscedasticity

There are two methods for improving the efficiency of the parameter estimation in the presence of heteroscedastic errors. If the error variance relationships are known, weighted regression can be used or an error model can be estimated. For details about error model estimation, see the section “[Error Covariance Structure Specification](#)” on page 1140. If the error variance relationship is unknown, GMM estimation can be used.

Weighted Regression

The WEIGHT statement can be used to correct for the heteroscedasticity. Consider the following model, which has a heteroscedastic error term:

$$y_t = 250(e^{-0.2t} - e^{-0.8t}) + \sqrt{(9/t)}\epsilon_t$$

The data for this model is generated with the following SAS statements.

```
data test;
  do t=1 to 25;
    y = 250 * (exp( -0.2 * t ) - exp( -0.8 * t )) +
      sqrt( 9 / t ) * rannor(1);
    output;
  end;
run;
```

If this model is estimated with OLS, as shown in the following statements, the estimates shown in [Figure 19.40](#) are obtained for the parameters.

```
proc model data=test;
  parms b1 0.1 b2 0.9;
  y = 250 * ( exp( -b1 * t ) - exp( -b2 * t ) );
  fit y;
run;
```

Figure 19.40 Unweighted OLS Estimates

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
b1	0.200977	0.00101	198.60	<.0001
b2	0.826236	0.00853	96.82	<.0001

If both sides of the model equation are multiplied by \sqrt{t} , the model has a homoscedastic error term. This multiplication or weighting is done through the WEIGHT statement. The WEIGHT statement variable operates on the squared residuals as

$$\epsilon'_t \epsilon_t = \text{weight} \times \mathbf{q}'_t \mathbf{q}_t$$

so that the WEIGHT statement variable represents the square of the model multiplier. The following PROC MODEL statements corrects the heteroscedasticity with a WEIGHT statement:

```
proc model data=test;
  parms b1 0.1 b2 0.9;
  y = 250 * ( exp( -b1 * t ) - exp( -b2 * t ) );
  fit y;
  weight t;
run;
```

Note that the WEIGHT statement follows the FIT statement. The weighted estimates are shown in [Figure 19.41](#).

Figure 19.41 Weighted OLS Estimates

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
b1	0.200503	0.000844	237.53	<.0001
b2	0.816701	0.0139	58.71	<.0001

The weighted OLS estimates are identical to the output produced by the following PROC MODEL example:

```
proc model data=test;
  parms b1 0.1 b2 0.9;
  y = 250 * ( exp( -b1 * t ) - exp( -b2 * t ) );
  _weight_ = t;
  fit y;
run;
```

If the WEIGHT statement is used in conjunction with the `_WEIGHT_` variable, the two values are multiplied together to obtain the weight used.

The WEIGHT statement and the `_WEIGHT_` variable operate on all the residuals in a system of equations. If a subset of the equations needs to be weighted, the residuals for each equation can be modified through the `RESID.` variable for each equation. The following example demonstrates the use of the `RESID.` variable to make a homoscedastic error term:

```
proc model data=test;
  parms b1 0.1 b2 0.9;
  y = 250 * ( exp( -b1 * t ) - exp( -b2 * t ) );
  resid.y = resid.y * sqrt(t);
  fit y;
run;
```

These statements produce estimates of the parameters and standard errors that are identical to the weighted OLS estimates. The reassignment of the `RESID.Y` variable must be done after `Y` is assigned; otherwise it would have no effect. Also, note that the residual (`RESID.Y`) is multiplied by \sqrt{t} . Here the multiplier is acting on the residual before it is squared.

GMM Estimation

If the form of the heteroscedasticity is unknown, generalized method of moments estimation (GMM) can be used. The following PROC MODEL statements use GMM to estimate the example model used in the preceding section:

```

proc model data=test;
  parms b1 0.1 b2 0.9;
  y = 250 * ( exp( -b1 * t ) - exp( -b2 * t ) );
  fit y / gmm;
  instruments b1 b2;
run;

```

GMM is an instrumental method, so instrument variables must be provided.

GMM estimation generates estimates for the parameters shown in Figure 19.42.

Figure 19.42 GMM Estimation for Heteroscedasticity

The MODEL Procedure				
Nonlinear GMM Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
b1	0.200487	0.000800	250.69	<.0001
b2	0.822148	0.0148	55.39	<.0001

Heteroscedasticity-Consistent Covariance Matrix Estimation

Homoscedasticity is required for ordinary least squares regression estimates to be efficient. A nonconstant error variance, heteroscedasticity, causes the OLS estimates to be inefficient, and the usual OLS covariance matrix, $\hat{\Sigma}$, is generally invalid:

$$\hat{\Sigma} = \sigma^2(\mathbf{X}'\mathbf{X})^{-1}$$

When the variance of the errors of a classical linear model

$$Y = \mathbf{X}\beta + \epsilon$$

is not constant across observations (heteroscedastic), so that $\sigma_i^2 \neq \sigma_j^2$ for some $j > 1$, the OLS estimator

$$\hat{\beta}_{OLS} = (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'Y$$

is unbiased but it is inefficient. Models that take into account the changing variance can make more efficient use of the data. When the variances, σ_i^2 , are known, generalized least squares (GLS) can be used and the estimator

$$\hat{\beta}_{GLS} = (\mathbf{X}'\mathbf{\Omega}\mathbf{X})^{-1}\mathbf{X}'\mathbf{\Omega}^{-1}Y$$

where

$$\mathbf{\Omega} = \begin{bmatrix} \sigma_1^2 & 0 & 0 & 0 \\ 0 & \sigma_2^2 & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \sigma_T^2 \end{bmatrix}$$

is unbiased and efficient. However, GLS is unavailable when the variances, σ_t^2 , are unknown.

To solve this problem White (1980) proposed a heteroscedastic consistent-covariance matrix estimator (HC-CME)

$$\hat{\Sigma} = (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\hat{\Omega}\mathbf{X}(\mathbf{X}'\mathbf{X})^{-1}$$

that is consistent as well as unbiased, where

$$\hat{\Omega}_0 = \begin{bmatrix} \epsilon_1^2 & 0 & 0 & 0 \\ 0 & \epsilon_2^2 & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \epsilon_T^2 \end{bmatrix}$$

and $\epsilon_t = Y_t - \mathbf{X}_t\beta_{OLS}$.

This estimator is considered somewhat unreliable in finite samples. Therefore, Davidson and MacKinnon (1993) propose three different modifications to estimating $\hat{\Omega}$. The first solution is to simply multiply ϵ_t^2 by $\frac{n}{n-df}$, where n is the number of observations and df is the number of explanatory variables, so that

$$\hat{\Omega}_1 = \begin{bmatrix} \frac{n}{n-df} \epsilon_1^2 & 0 & 0 & 0 \\ 0 & \frac{n}{n-df} \epsilon_2^2 & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \frac{n}{n-df} \epsilon_n^2 \end{bmatrix}$$

The second solution is to define

$$\hat{\Omega}_2 = \begin{bmatrix} \frac{\epsilon_1^2}{1-\hat{h}_1} & 0 & 0 & 0 \\ 0 & \frac{\epsilon_2^2}{1-\hat{h}_2} & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \frac{\epsilon_n^2}{1-\hat{h}_n} \end{bmatrix}$$

where $\hat{h}_t = \mathbf{X}_t(\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}_t'$.

The third solution, called the “jackknife,” is to define

$$\hat{\Omega}_3 = \begin{bmatrix} \frac{\epsilon_1^2}{(1-\hat{h}_1)^2} & 0 & 0 & 0 \\ 0 & \frac{\epsilon_2^2}{(1-\hat{h}_2)^2} & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \frac{\epsilon_n^2}{(1-\hat{h}_n)^2} \end{bmatrix}$$

MacKinnon and White (1985) investigated these three modified HCCMEs, including the original HCCME, based on finite-sample performance of pseudo- t statistics. The original HCCME performed the worst. The first modification performed better. The second modification performed even better than the first, and the third modification performed the best. They concluded that the original HCCME should never be used in finite sample estimation, and that the second and third modifications should be used over the first modification if the diagonals of $\hat{\Omega}$ are available.

Seemingly Unrelated Regression HCCME

Extending the discussion to systems of g equations, the HCCME for SUR estimation is

$$(\tilde{\mathbf{X}}'\tilde{\mathbf{X}})^{-1}\tilde{\mathbf{X}}'\hat{\mathbf{\Omega}}\tilde{\mathbf{X}}(\tilde{\mathbf{X}}'\tilde{\mathbf{X}})^{-1}$$

where $\tilde{\mathbf{X}}$ is a $ng \times k$ matrix with the first g rows representing the first observation, the next g rows representing the second observation, and so on. $\hat{\mathbf{\Omega}}$ is now a $ng \times ng$ block diagonal matrix with typical block $g \times g$

$$\hat{\mathbf{\Omega}}_i = \begin{bmatrix} \psi_{1,i} & \psi_{1,i} & \psi_{1,i} & \psi_{2,i} & \cdots & \psi_{1,i} & \psi_{g,i} \\ \psi_{2,i} & \psi_{1,i} & \psi_{2,i} & \psi_{2,i} & \cdots & \psi_{2,i} & \psi_{g,i} \\ \vdots & & \vdots & & \vdots & & \vdots \\ \psi_{g,i} & \psi_{1,i} & \psi_{g,i} & \psi_{2,i} & \cdots & \psi_{g,i} & \psi_{g,i} \end{bmatrix}$$

where

$$\psi_{j,i} = \epsilon_{j,i} \quad HC_0$$

or

$$\psi_{j,i} = \sqrt{\frac{n}{n-df}} \epsilon_{j,i} \quad HC_1$$

or

$$\psi_{j,i} = \epsilon_{j,i} / \sqrt{1 - \hat{h}_i} \quad HC_2$$

or

$$\psi_{j,i} = \epsilon_{j,i} / (1 - \hat{h}_i) \quad HC_3$$

Two- and Three-Stage Least Squares HCCME

For two- and three-stage least squares, the HCCME for a g equation system is

$$\text{Cov} F(\hat{\mathbf{\Omega}}) \text{Cov}$$

where

$$\text{Cov} = \left(\frac{1}{n} \mathbf{X}'(\mathbf{I} \otimes \mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{Z}')\mathbf{X} \right)^{-1}$$

is the normal covariance matrix without the \mathbf{S} matrix and

$$F(\mathbf{\Omega}) = \frac{1}{n} \sum_i^g \sum_j^g \mathbf{X}_i' \mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1} \mathbf{Z}' \hat{\mathbf{\Omega}}_{ij} \mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1} \mathbf{Z}' \mathbf{X}_j$$

where \mathbf{X}_j is a $n \times p$ matrix with the j th equations regressors in the appropriate columns and zeros everywhere else.

$$\hat{\Omega}_{ij} = \begin{bmatrix} \psi_{i,1}\psi_{j,1} & 0 & 0 & 0 \\ 0 & \psi_{i,2}\psi_{j,2} & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & \psi_{i,n}\psi_{j,n} \end{bmatrix}$$

For 2SLS $\hat{\Omega}_{ij} = 0$ when $i \neq j$. The ϵ_t used in $\hat{\Omega}$ is computed by using the parameter estimates obtained from the instrumental variables estimation.

The leverage value for the i th equation used in the HCCME=2 and HCCME=3 methods is computed as conditional on the first stage as

$$h_{ti} = \mathbf{Z}_t(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{X}_i(\mathbf{X}'(\mathbf{I} \otimes \mathbf{Z}(\mathbf{Z}' * \mathbf{Z})^{-1}\mathbf{Z}')\mathbf{X})^{-1}\mathbf{X}_i'\mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{Z}_t'$$

for 2SLS and

$$h_{ti} = \mathbf{Z}_t(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{X}_i(\mathbf{X}'(\mathbf{S}^{-1} \otimes \mathbf{Z}(\mathbf{Z}' * \mathbf{Z})^{-1}\mathbf{Z}')\mathbf{X})^{-1}\mathbf{X}_i'\mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{Z}_t'/\mathbf{S}_{ii}$$

for 3SLS.

Testing for Autocorrelation

The GODFREY= option in the FIT statement produces the Godfrey Lagrange multiplier test for serially correlated residuals for each equation (Godfrey 1978a and 1978b). n is the maximum autoregressive order, and specifies that Godfrey's tests be computed for lags 1 through n . The default number of lags is four.

The tests are performed separately for each equation estimated by the FIT statement. When a nonlinear model is estimated, the test is computed by using a linearized model.

The following is an example of the output produced by the GODFREY=3 option:

Figure 19.43 Autocorrelation Test Output

Godfrey Test Output			
The MODEL Procedure			
Godfrey's Serial Correlation Test			
Equation	Alternative	LM	Pr > LM
y	1	6.63	0.0100
	2	6.89	0.0319
	3	6.96	0.0732

The three variations of the test reported by the GODFREY=3 option are designed to have power against different alternative hypothesis. Thus, if the residuals in fact have only first-order autocorrelation, the lag

1 test has the most power for rejecting the null hypothesis of uncorrelated residuals. If the residuals have second- but not higher-order autocorrelation, the lag 2 test might be more likely to reject; the same is true for third-order autocorrelation and the lag 3 test.

The null hypothesis of Godfrey's tests is that the equation residuals are white noise. However, if the equation includes autoregressive error model of order p ($AR(p)$), then the lag i test, when considered in terms of the structural error, is for the null hypothesis that the structural errors are from an $AR(p)$ process versus the alternative hypothesis that the errors are from an $AR(p + i)$ process.

The alternative $ARMA(p, i)$ process is locally equivalent to the alternative $AR(p + i)$ process with respect to the null model $AR(p)$. Thus, the GODFREY= option results are also a test of $AR(p)$ errors against the alternative hypothesis of $ARMA(p, i)$ errors. See Godfrey (1978a and 1978b) for more detailed information.

Transformation of Error Terms

In PROC MODEL you can control the form of the error term. By default, the error term is assumed to be additive. This section demonstrates how to specify nonadditive error terms and discusses the effects of these transformations.

Models with Nonadditive Errors

The estimation methods used by PROC MODEL assume that the error terms of the equations are independently and identically distributed with zero means and finite variances. Furthermore, the methods assume that the *RESID.name* equation variable for normalized form equations or the *EQ.name* equation variable for general form equations contains an estimate of the error term of the true stochastic model whose parameters are being estimated. Details on *RESID.name* and *EQ.name* equation variables are in the section “[Equation Translations](#)” on page 1232.

To illustrate these points, consider the common loglinear model

$$y = \alpha x^\beta \quad (1)$$

$$\ln y = a + b \ln(x) \quad (2)$$

where $a = \log(\alpha)$ and $b = \beta$. Equation (2) is called the *log form* of the equation in contrast to equation (1), which is called the *level form* of the equation. Using the SYSLIN procedure, you can estimate equation (2) by specifying

```
proc syslin data=in;
  model logy=logx;
run;
```

where LOGY and LOGX are the logs of Y and X computed in a preceding DATA step. The resulting values for INTERCEPT and LOGX correspond to a and b in equation (2).

Using the MODEL procedure, you can try to estimate the parameters in the level form (and avoid the DATA step) by specifying

```
proc model data=in;
  parms alpha beta;
  y = alpha * x ** beta;
  fit y;
run;
```

where ALPHA and BETA are the parameters in equation (1).

Unfortunately, at least one of the preceding is wrong; an ambiguity results because equations (1) and (2) contain no explicit error term. The SYSLIN and MODEL procedures both deal with additive errors; the residual used (the estimate of the error term in the equation) is the difference between the predicted and actual values (of LOGY for PROC SYSLIN and of Y for PROC MODEL in this example). If you perform the regressions discussed previously, PROC SYSLIN estimates equation (3) while PROC MODEL estimates equation (4).

$$\ln y = a + b \ln(x) + \epsilon \quad (3)$$

$$y = \alpha x^\beta + \xi \quad (4)$$

These are different statistical models. Equation (3) is the log form of equation (5)

$y = \alpha x^\beta \mu$ (5) where $\mu = e^\epsilon$. Equation (4), on the other hand, cannot be linearized because the error term ξ (different from μ) is additive in the level form.

You must decide whether your model is equation (4) or (5). If the model is equation (4), you should use PROC MODEL. If you linearize equation (1) without considering the error term and apply SYSLIN to MODEL LOGY=LOGX, the results will be wrong. On the other hand, if your model is equation (5) (in practice it usually is), and you want to use PROC MODEL to estimate the parameters in the *level* form, you must do something to account for the multiplicative error.

PROC MODEL estimates parameters by minimizing an objective function. The objective function is computed using either the RESID.-prefixed equation variable or the EQ.-prefixed equation variable. You must make sure that these prefixed equation variables are assigned an appropriate error term. If the model has additive errors that satisfy the assumptions, nothing needs to be done. In the case of equation (5), the error is nonadditive and the equation is in normalized form, so you must alter the value of RESID.Y.

The following assigns a valid estimate of μ to RESID.Y:

```
y = alpha * x ** beta;
resid.y = actual.y / pred.y;
```

However, $\mu = e^\epsilon$, and therefore μ , cannot have a mean of zero, and you cannot consistently estimate α and β by minimizing the sum of squares of an estimate of μ . Instead, you use $\epsilon = \ln \mu$.

```
proc model data=in;
  parms alpha beta;
  y = alpha * x ** beta;
  resid.y = log( actual.y / pred.y );
  fit y;
run;
```

If the model was expressed in general form, this transformation becomes

```
proc model data=in;
  parms alpha beta;
  EQ.trans = log( y / (alpha * x ** beta));
  fit trans;
run;
```

Both examples produce estimates of α and β of the level form that match the estimates of a and b of the log form. That is, $\text{ALPHA} = \exp(\text{INTERCEPT})$ and $\text{BETA} = \text{LOGX}$, where INTERCEPT and LOGX are the PROC SYSLIN parameter estimates from the MODEL $\text{LOGY} = \text{LOGX}$. The standard error reported for ALPHA is different from that for the INTERCEPT in the log form.

The preceding example is not intended to suggest that loglinear models should be estimated in level form but, rather, to make the following points:

- Nonlinear transformations of equations involve the error term of the equation, and this should be taken into account when transforming models.
- The RESID.-prefixed and the EQ.-prefixed equation variables for models estimated by the MODEL procedure must represent additive errors with zero means.
- You can use assignments to RESID.-prefixed and EQ.-prefixed equation variables to transform error terms.
- Some models do not have additive errors or zero means, and many such models can be estimated using the MODEL procedure. The preceding approach applies not only to multiplicative models but to any model that can be manipulated to isolate the error term.

Predicted Values of Transformed Models

Nonadditive or transformed errors affect the distribution of the predicted values, as well as the estimates. For the preceding loglinear example, the MODEL procedure produces consistent parameter estimates. However, the predicted values for Y computed by PROC MODEL are not unbiased estimates of the expected values of Y, although they do estimate the conditional median Y values.

In general, the predicted values produced for a model with nonadditive errors are not unbiased estimates of the conditional means of the endogenous value. If the model can be transformed to a model with additive errors by using a *monotonic* transformation, the predicted values estimate the conditional medians of the endogenous variable.

For transformed models in which the biasing factor is known, you can use programming statements to correct for the bias in the predicted values as estimates of the endogenous means. In the preceding log-linear case, the predicted values are biased by the factor $\exp(\sigma^2/2)$. You can produce approximately unbiased predicted values in this case by writing the model as

```
proc model data=in;
  parms alpha beta;
```

```

y=alpha * x ** beta;
resid.y = log( actual.y / pred.y );
fit y;
run;

```

See Miller (1984) for a discussion of bias factors for predicted values of transformed models.

Note that models with transformed errors are not appropriate for Monte Carlo simulation that uses the `SDATA=` option. PROC MODEL computes the `OUTS=` matrix from the transformed `RESID.-`prefixed equation variables, while it uses the `SDATA=` matrix to generate multivariate normal errors, which are added to the predicted values. This method of computing errors is inconsistent when the equation variables have been transformed.

Error Covariance Structure Specification

One of the key assumptions of regression is that the variance of the errors is constant across observations. Correcting for heteroscedasticity improves the efficiency of the estimates.

Consider the following general form for models:

$$\begin{aligned}
 \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) &= \boldsymbol{\varepsilon}_t \\
 \boldsymbol{\varepsilon}_t &= H_t * \boldsymbol{\epsilon}_t \\
 H_t &= \begin{bmatrix} \sqrt{h_{t,1}} & 0 & \dots & 0 \\ 0 & \sqrt{h_{t,2}} & \dots & 0 \\ & & \ddots & \\ 0 & 0 & \dots & \sqrt{h_{t,g}} \end{bmatrix} \\
 \mathbf{h}_t &= \mathbf{g}(\mathbf{y}_t, \mathbf{x}_t, \phi)
 \end{aligned}$$

where $\boldsymbol{\epsilon}_t \sim N(0, \Sigma)$.

For models that are homoscedastic,

$$h_t = 1$$

If you have a model that is heteroscedastic with known form, you can improve the efficiency of the estimates by performing a weighted regression. The weight variable, using this notation, would be $1/\sqrt{h_t}$.

If the errors for a model are heteroscedastic and the functional form of the variance is known, the model for the variance can be estimated along with the regression function.

To specify a functional form for the variance, assign the function to an `H.var` variable where `var` is the equation variable. For example, if you want to estimate the scale parameter for the variance of a simple regression model

$$y = a * x + b$$

you can specify

```
proc model data=s;
  y = a * x + b;
  h.y = sigma**2;
fit y;
```

Consider the same model with the following functional form for the variance:

$$h_t = \sigma^2 * x^{2*\alpha}$$

This would be written as

```
proc model data=s;
  y = a * x + b;
  h.y = sigma**2 * x**(2*alpha);
fit y;
```

There are three ways to model the variance in the MODEL procedure: feasible generalized least squares, generalized method of moments, and full information maximum likelihood.

Feasible GLS

A simple approach to estimating a variance function is to estimate the mean parameters θ by using some auxiliary method, such as OLS, and then use the residuals of that estimation to estimate the parameters ϕ of the variance function. This scheme is called *feasible GLS*. It is possible to use the residuals from an auxiliary method for the purpose of estimating ϕ because in many cases the residuals consistently estimate the error terms.

For all estimation methods except GMM and FIML, using the H.var syntax specifies that feasible GLS is used in the estimation. For feasible GLS, the mean function is estimated by the usual method. The variance function is then estimated using pseudo-likelihood (PL) function of the generated residuals. The objective function for the PL estimation is

$$p_n(\sigma, \theta) = \sum_{i=1}^n \left(\frac{(y_i - f(x_i, \hat{\beta}))^2}{\sigma^2 h(z_i, \theta)} + \log[\sigma^2 h(z_i, \theta)] \right)$$

Once the variance function has been estimated, the mean function is reestimated by using the variance function as weights. If an S-iterated method is selected, this process is repeated until convergence (iterated feasible GLS).

Note that feasible GLS does not yield consistent estimates when one of the following is true:

- The variance is unbounded.
- There is too much serial dependence in the errors (the dependence does not fade with time).
- There is a combination of serial dependence and lag dependent variables.

The first two cases are unusual, but the third is much more common. Whether iterated feasible GLS avoids consistency problems with the last case is an unanswered research question. For more information see Davidson and MacKinnon (1993, pp. 298–301) or Gallant (1987, pp. 124–125) and Amemiya (1985, pp. 202–203).

One limitation is that parameters cannot be shared between the mean equation and the variance equation. This implies that certain GARCH models, cross-equation restrictions of parameters, or testing of combinations of parameters in the mean and variance component are not allowed.

Generalized Method of Moments

In GMM, normally the first moment of the mean function is used in the objective function.

$$\begin{aligned} \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta) &= \epsilon_t \\ \mathbf{E}(\epsilon_t) &= 0 \end{aligned}$$

To add the second moment conditions to the estimation, add the equation

$$\mathbf{E}(\epsilon_t * \epsilon_t - h_t) = 0$$

to the model. For example, if you want to estimate σ for linear example above, you can write

```
proc model data=s;
  y = a * x + b;
  eq.two = resid.y**2 - sigma**2;
fit y two/ gmm;
instruments x;
run;
```

This is a popular way to estimate a continuous-time interest rate processes (see Chan et al. 1992). The H.var syntax automatically generates this system of equations.

To further take advantage of the information obtained about the variance, the moment equations can be modified to

$$\begin{aligned} \mathbf{E}(\epsilon_t / \sqrt{h_t}) &= 0 \\ \mathbf{E}(\epsilon_t * \epsilon_t - h_t) &= 0 \end{aligned}$$

For the above example, this can be written as

```
proc model data=s;
  y = a * x + b;
  eq.two = resid.y**2 - sigma**2;
  resid.y = resid.y / sigma;
fit y two/ gmm;
instruments x;
run;
```


Note that, if the error model is misspecified in this form of the GMM model, the parameter estimates might be inconsistent.

Full Information Maximum Likelihood

For FIML estimation of variance functions, the concentrated likelihood below is used as the objective function. That is, the mean function is coupled with the variance function and the system is solved simultaneously.

$$l_n(\phi) = \frac{ng}{2}(1 + \ln(2\pi)) - \sum_{t=1}^n \ln \left(\left| \frac{\partial \mathbf{q}(\mathbf{y}_t, \mathbf{x}_t, \theta)}{\partial \mathbf{y}_t} \right| \right) \\ + \frac{1}{2} \sum_{t=1}^n \sum_{i=1}^g (\ln(h_{t,i}) + \mathbf{q}_i(\mathbf{y}_t, \mathbf{x}_t, \theta)^2 / h_{t,i})$$

where g is the number of equations in the system.

The HESSIAN=GLS option is not available for FIML estimation that involves variance functions. The matrix used when HESSIAN=CROSS is specified is a crossproducts matrix that has been enhanced by the dual quasi-Newton approximation.

Examples

You can specify a GARCH(1,1) model as follows:

```
proc model data=modloc.usd_jpy;

    /* Mean model -----*/
    jpyret = intercept ;

    /* Variance model -----*/
    h.jpyret = arch0
              + arch1 * xlag( resid.jpyret ** 2, mse.jpyret )
              + garch1 * xlag(h.jpyret, mse.jpyret) ;

    bounds arch0 arch1 garch1 >= 0;

    fit jpyret / method=marquardt fiml;
run;
```

Note that the BOUNDS statement is used to ensure that the parameters are positive, a requirement for GARCH models.

EGARCH models are used because there are no restrictions on the parameters. You can specify a EGARCH(1,1) model as follows:

```

proc model data=sasuser.usd_dem ;

    /* Mean model -----*/
    demret = intercept ;

    /* Variance model -----*/
    if ( _OBS_ =1 ) then
        h.demret = exp( earch0 + egarch1 * log(mse.demret) );
    else
        h.demret = exp( earch0 + earch1 * zlag( g)
                        + egarch1 * log(zlag(h.demret))) ;
        g = - theta * nresid.demret + abs( nresid.demret ) - sqrt(2/3.1415);

fit demret / method=marquardt fiml maxiter=100 converge=1.0e-6;
run;

```

Ordinary Differential Equations

Ordinary differential equations (ODEs) are also called *initial value problems* because a time zero value for each first-order differential equation is needed. The following is an example of a first-order system of ODEs:

$$\begin{aligned}
 y' &= -0.1y + 2.5z^2 \\
 z' &= -z \\
 y_0 &= 0 \\
 z_0 &= 1
 \end{aligned}$$

Note that you must provide an initial value for each ODE.

As a reminder, any n -order differential equation can be modeled as a system of first-order differential equations. For example, consider the differential equations

$$\begin{aligned}
 y'' &= by' + cy \\
 y_0 &= 0 \\
 y'_0 &= 1
 \end{aligned}$$

which can be written as the system of differential equations

$$\begin{aligned}
 y' &= z \\
 z' &= by' + cy \\
 y_0 &= 0 \\
 z_0 &= 1
 \end{aligned}$$

This differential system can be simulated as follows:

```
data t;
  time=0; output;
  time=1; output;
  time=2; output;
run;

proc model data=t ;
  dependent y 0 z 1;
  parm b -2 c -4;

  dert.y = z;
  dert.z = b * dert.y + c * y;

  solve y z / dynamic solveprint;
run;
```

The preceding statements produce the output shown in Figure 19.44. These statements produce additional output, which is not shown.

Figure 19.44 Simulation Results for Differential System

The MODEL Procedure							
Simultaneous Simulation							
Observation	1	Missing	2	CC	-1.000000		
		Iterations	0				
Solution Values							
		y				z	
		0.000000				1.000000	
Observation	2	Iterations	0	CC	0.000000	ERROR.y	0.000000
Solution Values							
		y				z	
		0.2096398				-.2687053	
Observation	3	Iterations	0	CC	9.464802	ERROR.y	-0.234405
Solution Values							
		y				z	
		-.0247649				-.1035929	

The differential variables are distinguished by the derivative with respect to time (DERT.) prefix. Once you define the DERT. variable, you can use it on the right-hand side of another equation. The differential equations must be expressed in normal form; implicit differential equations are not allowed, and other terms on the left-hand side are not allowed.

The TIME variable is the *implied with respect to* variable for all DERT. variables. The TIME variable is also the only variable that must be in the input data set.

You can provide initial values for the differential equations in the data set, in the declaration statement (as in the previous example), or in statements in the program. Using the previous example, you can specify the initial values as

```
proc model data=t ;
    dependent y z ;
    parm b -2 c -4;

    if ( time=0 ) then
        do;
            y=0;
            z=1;
        end;
    else
        do;
            dert.y = z;
            dert.z = b * dert.y + c * y;
        end;
    end;

    solve y z / dynamic solveprint;
run;
```

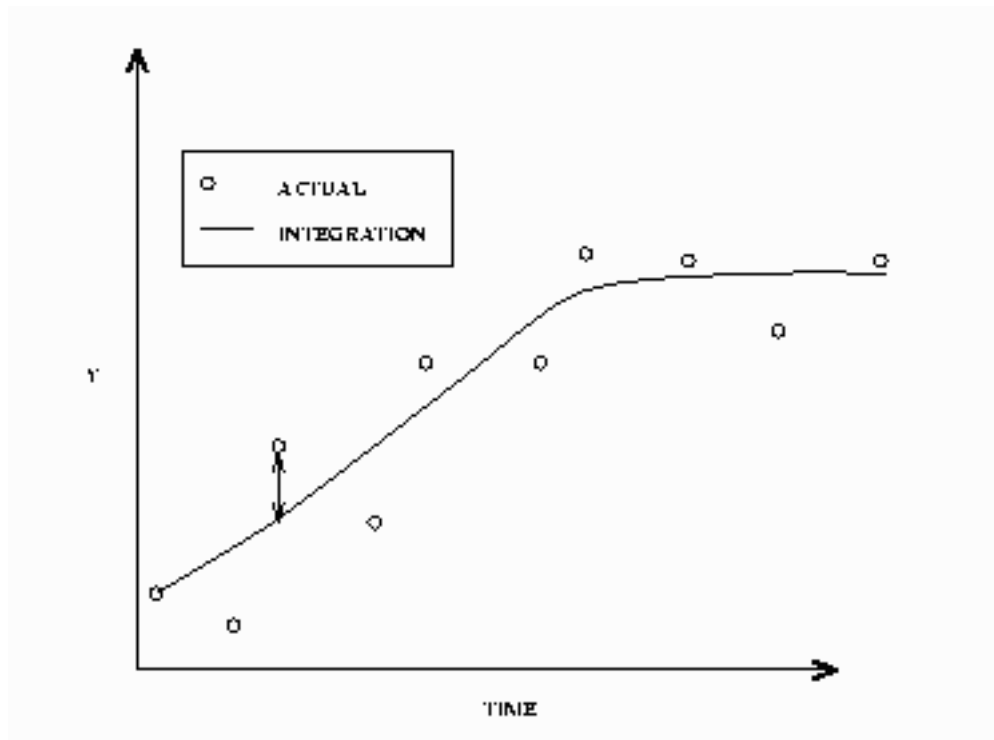
If you do not provide an initial value, 0 is used.

DYNAMIC and STATIC Simulation

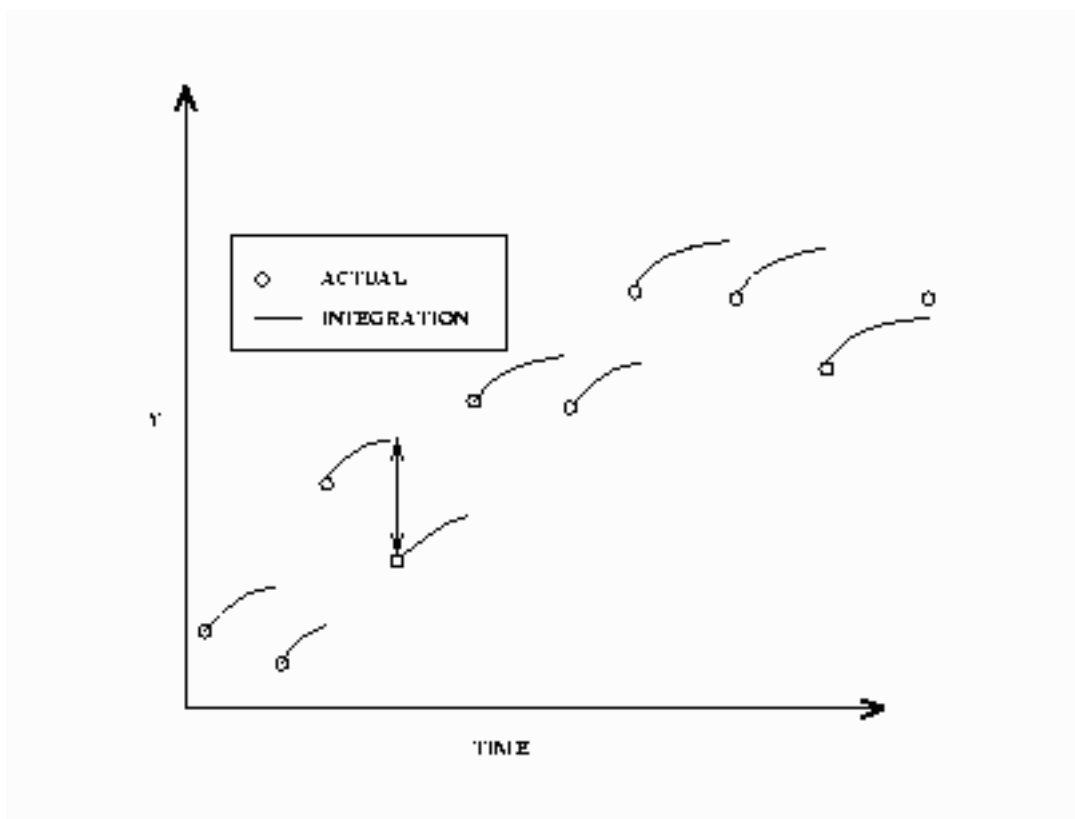
Note that, in the previous example, the DYNAMIC option is specified in the SOLVE statement. The DYNAMIC and STATIC options work the same for differential equations as they do for dynamic systems. In the differential equation case, the DYNAMIC option makes the initial value needed at each observation the computed value from the previous iteration. For a static simulation, the data set must contain values for the integrated variables. For example, if DERT.Y and DERT.Z are the differential variables, you must include Y and Z in the input data set in order to do a static simulation of the model.

If the simulation is dynamic, the initial values for the differential equations are obtained from the data set, if they are available. If the variable is not in the data set, you can specify the initial value in a declaration statement. If you do not specify an initial value, the value of 0.0 is used.

A dynamic solution is obtained by solving one initial value problem for all the data. A graph of a simple dynamic simulation is shown in [Figure 19.45](#). If the time variable for the current observation is less than the time variable for the previous observation, the integration is restarted from this point. This allows for multiple samples in one data file.

Figure 19.45 Dynamic Solution

In a static solution, $n-1$ initial value problems are solved using the first $n-1$ data values as initial values. The equations are integrated using the i th data value as an initial value to the $i+1$ data value. [Figure 19.46](#) displays a static simulation of noisy data from a simple differential equation. The static solution does not propagate errors in initial values as the dynamic solution does.

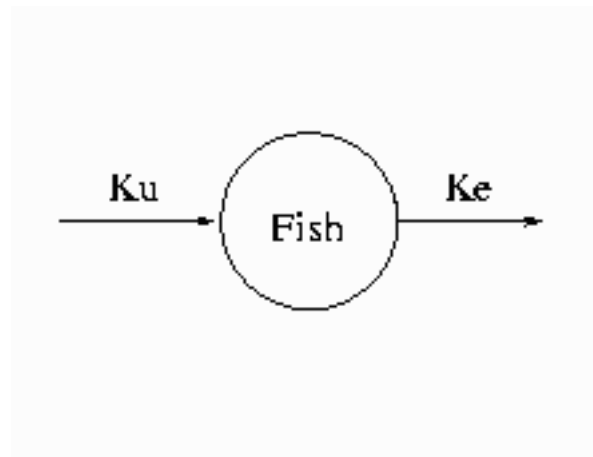
Figure 19.46 Static Solution

For estimation, the DYNAMIC and STATIC options in the FIT statement perform the same functions as they do in the SOLVE statement. Components of differential systems that have missing values or are not in the data set are simulated dynamically. For example, often in multiple compartment kinetic models, only one compartment is monitored. The differential equations that describe the unmonitored compartments are simulated dynamically.

For estimation, it is important to have accurate initial values for ODEs that are not in the data set. If an accurate initial value is not known, the initial value can be made an unknown parameter and estimated. This allows for errors in the initial values but increases the number of parameters to estimate by the number of equations.

Estimation of Differential Equations

Consider the kinetic model for the accumulation of mercury (Hg) in mosquito fish (Matis, Miller, and Allen 1991, p. 177). The model for this process is the one-compartment constant infusion model shown in Figure 19.47.

Figure 19.47 One-Compartment Constant Infusion Model

The differential equation that models this process is

$$\begin{aligned}\frac{dconc}{dt} &= k_u - k_e conc \\ conc_0 &= 0\end{aligned}$$

The analytical solution to the model is

$$conc = (k_u/k_e)(1 - \exp(-k_e t))$$

The data for the model are

```
data fish;
  input day conc;
datalines;
0.0    0.0
1.0    0.15
2.0    0.2
3.0    0.26
4.0    0.32
6.0    0.33
;
```

To fit this model in differential form, use the following statements:

```
proc model data=fish;
  parm ku ke;

  dert.conc = ku - ke * conc;

  fit conc / time=day;
run;
```

The results from this estimation are shown in [Figure 19.48](#).

Figure 19.48 Static Estimation Results for Fish Model

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
ku	0.180159	0.0312	5.78	0.0044
ke	0.524661	0.1181	4.44	0.0113

To perform a dynamic estimation of the differential equation, add the DYNAMIC option to the FIT statement.

```
proc model data=fish;
  parm ku .3 ke .3;

  dert.conc = ku - ke * conc;

  fit conc / time = day dynamic;
run;
```

The equation DERT.CONC is integrated from $conc(0) = 0$. The results from this estimation are shown in Figure 19.49.

Figure 19.49 Dynamic Estimation Results for Fish Model

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
ku	0.167109	0.0170	9.84	0.0006
ke	0.469033	0.0731	6.42	0.0030

To perform a dynamic estimation of the differential equation and estimate the initial value, use the following statements:

```
proc model data=fish;
  parm ku .3 ke .3 conc0 0;

  dert.conc = ku - ke * conc;

  fit conc initial=(conc = conc0) / time = day dynamic;
run;
```

The INITIAL= option in the FIT statement is used to associate the initial value of a differential equation with a parameter. The results from this estimation are shown in Figure 19.50.

Figure 19.50 Dynamic Estimation with Initial Value for Fish Model

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
ku	0.164408	0.0230	7.14	0.0057
ke	0.45949	0.0943	4.87	0.0165
conc0	0.003798	0.0174	0.22	0.8414

Finally, to estimate the fish model by using the analytical solution, use the following statements:

```
proc model data=fish;
  parm ku .3 ke .3;

  conc = (ku/ ke)*( 1 -exp(-ke * day));

  fit conc;
run;
```

The results from this estimation are shown in [Figure 19.51](#).

Figure 19.51 Analytical Estimation Results for Fish Model

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
ku	0.167109	0.0170	9.84	0.0006
ke	0.469033	0.0731	6.42	0.0030

A comparison of the results among the four estimations reveals that the two dynamic estimations and the analytical estimation give nearly identical results (identical to the default precision). The two dynamic estimations are identical because the estimated initial value (0.00013071) is very close to the initial value used in the first dynamic estimation (0). Note also that the static model did not require an initial guess for the parameter values. Static estimation, in general, is more forgiving of bad initial values.

The form of the estimation that is preferred depends mostly on the model and data. If a very accurate initial value is known, then a dynamic estimation makes sense. If, additionally, the model can be written analytically, then the analytical estimation is computationally simpler. If only an approximate initial value is known and not modeled as an unknown parameter, the static estimation is less sensitive to errors in the initial value.

The form of the error in the model is also an important factor in choosing the form of the estimation. If the error term is additive and independent of previous error, then the dynamic mode is appropriate. If, on the

other hand, the errors are cumulative, a static estimation is more appropriate. See the section “[Monte Carlo Simulation](#)” on page 1197 for an example.

Auxiliary Equations

Auxiliary equations can be used with differential equations. These are equations that need to be satisfied with the differential equations at each point between each data value. They are automatically added to the system, so you do not need to specify them in the SOLVE or FIT statement.

Consider the following example.

The Michaelis-Menten equations describe the kinetics of an enzyme-catalyzed reaction. The enzyme is E, and S is called the *substrate*. The enzyme first reacts with the substrate to form the enzyme-substrate complex ES, which then breaks down in a second step to form enzyme and products P.

The reaction rates are described by the following system of differential equations:

$$\frac{d[ES]}{dt} = k_1([E] - [ES])[S] - k_2[ES] - k_3[ES]$$

$$\frac{d[S]}{dt} = -k_1([E] - [ES])[S] + k_2[ES]$$

$$[E] = [E]_{tot} - [ES]$$

The first equation describes the rate of formation of ES from E + S. The rate of formation of ES from E + P is very small and can be ignored. The enzyme is in either the complexed or the uncomplexed form. So if the total $([E]_{tot})$ concentration of enzyme and the amount bound to the substrate is known, $[E]$ can be obtained by conservation.

In this example, the conservation equation is an auxiliary equation and is coupled with the differential equations for integration.

Time Variable

You must provide a time variable in the data set. The name of the time variable defaults to TIME. You can use other variables as the time variable by specifying the TIME= option in the FIT or SOLVE statement. The time intervals need not be evenly spaced. If the time variable for the current observation is less than the time variable for the previous observation, the integration is restarted.

Differential Equations and Goal Seeking

Consider the following differential equation

$$y' = a * x$$

and the data set

```

data t2;
  y=0; time=0; output;
  y=2; time=1; output;
  y=3; time=2; output;
run;

```

The problem is to find values for X that satisfy the differential equation and the data in the data set. Problems of this kind are sometimes referred to as *goal-seeking problems* because they require you to search for values of X that satisfy the goal of Y .

This problem is solved with the following statements:

```

proc model data=t2;
  independent x 0;
  dependent y;
  parm a 5;
  dert.y = a * x;
  solve x / out=goaldata;
run;

proc print data=goaldata;
run;

```

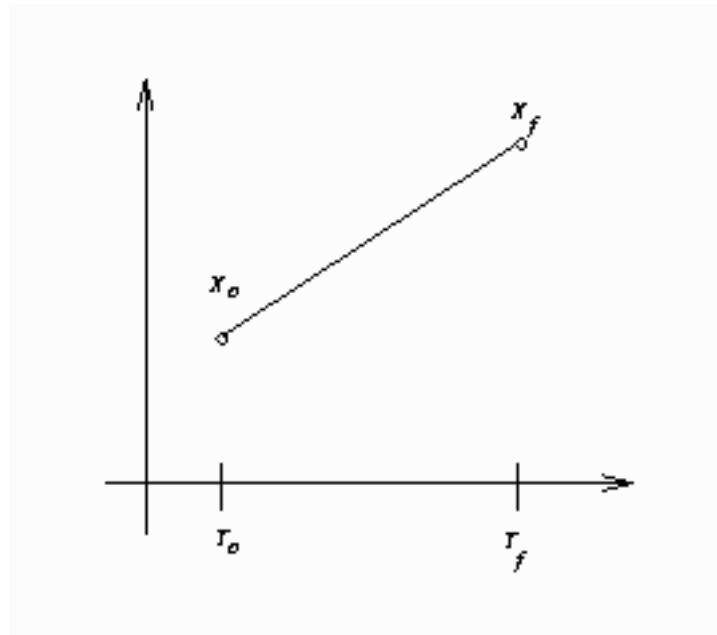
The output from the PROC PRINT statement is shown in [Figure 19.52](#).

Figure 19.52 Dynamic Solution

Obs	_TYPE_	_MODE_	_ERRORS_	x	y	time
1	PREDICT	SIMULATE	0	0.0	0	0
2	PREDICT	SIMULATE	0	0.8	2	1
3	PREDICT	SIMULATE	0	-0.4	3	2

Note that an initial value of 0 is provided for the X variable because it is undetermined at $\text{TIME} = 0$.

In the preceding goal-seeking example, X is treated as a linear function between each set of data points (see [Figure 19.53](#)).

Figure 19.53 Form of X Used for Integration in Goal Seeking

If you integrate $y' = ax$ manually, you have

$$\begin{aligned}
 x(t) &= \frac{t_f - t}{t_f - t_o} x_o + \frac{t - t_o}{t_f - t_o} x_f \\
 y_f - y_o &= \int_{t_o}^{t_f} ax(t) dt \\
 &= a \frac{1}{t_f - t_o} (t(t_f x_o - t_o x_f) + \frac{1}{2} t^2 (x_f - x_o)) \Big|_{t_o}^{t_f}
 \end{aligned}$$

For observation 2, this reduces to

$$\begin{aligned}
 y_f - y_o &= \frac{1}{2} a * x_f \\
 2 &= 2.5 * x_f
 \end{aligned}$$

So $x = 0.8$ for this observation.

Goal seeking for the TIME variable is not allowed.

Restrictions and Bounds on Parameters

Using the BOUNDS and RESTRICT statements, PROC MODEL can compute optimal estimates subject to equality or inequality constraints on the parameter estimates.

Equality restrictions can be written as a vector function:

$$\mathbf{h}(\theta) = 0$$

Inequality restrictions are either active or inactive. When an inequality restriction is active, it is treated as an equality restriction. All inactive inequality restrictions can be written as a vector function:

$$F(\theta) \geq 0$$

Strict inequalities, such as $(f(\theta) > 0)$, are transformed into inequalities as $f(\theta) \times (1 - \epsilon) - \epsilon \geq 0$, where the tolerance ϵ is controlled by the EPSILON= option in the FIT statement and defaults to 10^{-8} . The i th inequality restriction becomes active if $F_i < 0$ and remains active until its Lagrange multiplier becomes negative. Lagrange multipliers are computed for all the nonredundant equality restrictions and all the active inequality restrictions.

For the following, assume the vector $\mathbf{h}(\theta)$ contains all the current active restrictions. The constraint matrix \mathbf{A} is

$$\mathbf{A}(\hat{\theta}) = \frac{\partial \mathbf{h}(\hat{\theta})}{\partial \hat{\theta}}$$

The covariance matrix for the restricted parameter estimates is computed as

$$\mathbf{Z}(\mathbf{Z}'\mathbf{H}\mathbf{Z})^{-1}\mathbf{Z}'$$

where \mathbf{H} is Hessian or approximation to the Hessian of the objective function $((\mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{I})\mathbf{X})$ for OLS), and \mathbf{Z} is the last $(np - nc)$ columns of \mathbf{Q} . \mathbf{Q} is from an LQ factorization of the constraint matrix, nc is the number of active constraints, and np is the number of parameters. See Gill, Murray, and Wright (1981) for more details on LQ factorization. The covariance column in Table 19.2 summarizes the Hessian approximation used for each estimation method.

The covariance matrix for the Lagrange multipliers is computed as

$$(\mathbf{A}\mathbf{H}^{-1}\mathbf{A}')^{-1}$$

The p -value reported for a restriction is computed from a beta distribution rather than a t distribution because the numerator and the denominator of the t ratio for an estimated Lagrange multiplier are not independent.

The Lagrange multipliers for the active restrictions are printed with the parameter estimates. The Lagrange multiplier estimates are computed using the relationship

$$\mathbf{A}'\lambda = \mathbf{g}$$

where the dimensions of the constraint matrix \mathbf{A} are the number of constraints by the number of parameters, λ is the vector of Lagrange multipliers, and \mathbf{g} is the gradient of the objective function at the final estimates.

The final gradient includes the effects of the estimated \mathbf{S} matrix. For example, for OLS the final gradient would be:

$$\mathbf{g} = \mathbf{X}'(\text{diag}(\mathbf{S})^{-1} \otimes \mathbf{I})\mathbf{r}$$

where \mathbf{r} is the residual vector. Note that when nonlinear restrictions are imposed, the convergence measure R might have values greater than one for some iterations.

Tests on Parameters

In general, the hypothesis tested can be written as

$$H_0 : \mathbf{h}(\theta) = 0$$

where $\mathbf{h}(\theta)$ is a vector-valued function of the parameters θ given by the r expressions specified on the TEST statement.

Let $\hat{\mathbf{V}}$ be the estimate of the covariance matrix of $\hat{\theta}$. Let $\hat{\theta}$ be the unconstrained estimate of θ and $\tilde{\theta}$ be the constrained estimate of θ such that $h(\tilde{\theta}) = 0$. Let

$$\mathbf{A}(\theta) = \partial h(\theta) / \partial \theta \big|_{\hat{\theta}}$$

Let r be the dimension of $h(\theta)$ and n be the number of observations. Using this notation, the test statistics for the three kinds of tests are computed as follows.

The Wald test statistic is defined as

$$W = h'(\hat{\theta}) \left(\mathbf{A}(\hat{\theta}) \hat{\mathbf{V}} \mathbf{A}'(\hat{\theta}) \right)^{-1} h(\hat{\theta})$$

The Wald test is not invariant to reparameterization of the model (Gregory and Veall 1985; Gallant 1987, p. 219). For more information about the theoretical properties of the Wald test, see Phillips and Park (1988).

The Lagrange multiplier test statistic is

$$R = \lambda' \mathbf{A}(\tilde{\theta}) \tilde{\mathbf{V}} \mathbf{A}'(\tilde{\theta}) \lambda$$

where λ is the vector of Lagrange multipliers from the computation of the restricted estimate $\tilde{\theta}$.

The Lagrange multiplier test statistic is equivalent to Rao's efficient score test statistic:

$$R = (\partial L(\tilde{\theta}) / \partial \theta)' \tilde{\mathbf{V}} (\partial L(\tilde{\theta}) / \partial \theta)$$

where L is the log-likelihood function for the estimation method used. For SUR, 3SLS, GMM, and iterated versions of these methods, the likelihood function is computed as

$$L = \text{Objective} \times Nobs / 2$$

For OLS and 2SLS, the Lagrange multiplier test statistic is computed as:

$$R = [(\partial \hat{S}(\tilde{\theta}) / \partial \theta)' \tilde{\mathbf{V}} (\partial \hat{S}(\tilde{\theta}) / \partial \theta)] / \hat{S}(\tilde{\theta})$$

where $\hat{S}(\tilde{\theta})$ is the corresponding objective function value at the constrained estimate.

The likelihood ratio test statistic is

$$T = 2 \left(L(\hat{\theta}) - L(\tilde{\theta}) \right)$$

where $\tilde{\theta}$ represents the constrained estimate of θ and L is the concentrated log-likelihood value.

For OLS and 2SLS, the likelihood ratio test statistic is computed as:

$$T = (n - nparms) \times (\hat{S}(\tilde{\theta}) - \hat{S}(\hat{\theta})) / \hat{S}(\hat{\theta})$$

This test statistic is an approximation from

$$T = n \times \log \left(1 + \frac{rF}{n - nparms} \right)$$

when the value of $rF/(n - nparms)$ is small (Greene 2004, p. 421).

The likelihood ratio test is not appropriate for models with nonstationary serially correlated errors (Gallant 1987, p. 139). The likelihood ratio test should not be used for dynamic systems, for systems with lagged dependent variables, or with the FIML estimation method unless certain conditions are met (see Gallant 1987, p. 479).

For each kind of test, under the null hypothesis the test statistic is asymptotically distributed as a χ^2 random variable with r degrees of freedom, where r is the number of expressions in the TEST statement. The p -values reported for the tests are computed from the $\chi^2(r)$ distribution and are only asymptotically valid. When both RESTRICT and TEST statements are used in a PROC MODEL step, test statistics are computed by taking into account the constraints imposed by the RESTRICT statement.

Monte Carlo simulations suggest that the asymptotic distribution of the Wald test is a poorer approximation to its small sample distribution than the other two tests. However, the Wald test has the least computational cost, since it does not require computation of the constrained estimate $\tilde{\theta}$.

The following is an example of using the TEST statement to perform a likelihood ratio test for a compound hypothesis.

```
test a*exp(-k) = 1-k, d = 0 , / 1r;
```

It is important to keep in mind that although individual t tests for each parameter are printed by default into the parameter estimates table, they are only asymptotically valid for nonlinear models. You should be cautious in drawing any inferences from these t tests for small samples.

Hausman Specification Test

Hausman's specification test, or m -statistic, can be used to test hypotheses in terms of bias or inconsistency of an estimator. This test was also proposed by Wu (1973). Hausman's m -statistic is as follows.

Given two estimators, $\hat{\beta}_0$ and $\hat{\beta}_1$, where under the null hypothesis both estimators are consistent but only $\hat{\beta}_0$ is asymptotically efficient and under the alternative hypothesis only $\hat{\beta}_1$ is consistent, the m -statistic is

$$m = \hat{q}'(\hat{\mathbf{V}}_1 - \hat{\mathbf{V}}_0)^{-1}\hat{q}$$

where $\hat{\mathbf{V}}_1$ and $\hat{\mathbf{V}}_0$ represent consistent estimates of the asymptotic covariance matrices of $\hat{\beta}_1$ and $\hat{\beta}_0$ respectively, and

$$q = \hat{\beta}_1 - \hat{\beta}_0$$

The m -statistic is then distributed χ^2 with k degrees of freedom, where k is the rank of the matrix $(\hat{\mathbf{V}}_1 - \hat{\mathbf{V}}_0)$. A generalized inverse is used, as recommended by Hausman and Taylor (1982).

In the MODEL procedure, Hausman's m -statistic can be used to determine if it is necessary to use an instrumental variables method rather than a more efficient OLS estimation. Hausman's m -statistic can also be used to compare 2SLS with 3SLS for a class of estimators for which 3SLS is asymptotically efficient (similarly for OLS and SUR).

Hausman's m -statistic can also be used, in principle, to test the null hypothesis of normality when comparing 3SLS to FIML. Because of the poor performance of this form of the test, it is not offered in the MODEL procedure. See Fair (1984, pp. 246–247) for a discussion of why Hausman's test fails for common econometric models.

To perform a Hausman's specification test, specify the HAUSMAN option in the FIT statement. The selected estimation methods are compared using Hausman's m -statistic.

In the following example, Hausman's test is used to check the presence of measurement error. Under H_0 of no measurement error, OLS is efficient, while under H_1 , 2SLS is consistent. In the following code, OLS and 2SLS are used to estimate the model, and Hausman's test is requested.

```
proc model data=one out=fiml2;
    endogenous y1 y2;

    y1 = py2 * y2 + px1 * x1 + interrc;
    y2 = py1* y1 + pz1 * z1 + d2;

    fit y1 y2 / ols 2sls hausman;
    instruments x1 z1;
run;
```

The output specified by the HAUSMAN option produces the results shown in Figure 19.54.

Figure 19.54 Hausman's Specification Test Results

The MODEL Procedure				
Hausman's Specification Test Results				
Efficient under H0	Consistent under H1	DF	Statistic	Pr > ChiSq
OLS	2SLS	6	13.86	0.0313

Figure 19.54 indicates that 2SLS is preferred over OLS at 5% level of significance. In this case, the null hypothesis of no measurement error is rejected. Hence, the instrumental variable estimator is required for this example due to the presence of measurement error.

Chow Tests

The Chow test is used to test for break points or structural changes in a model. The problem is posed as a partitioning of the data into two parts of size n_1 and n_2 . The null hypothesis to be tested is

$$H_0 : \beta_1 = \beta_2 = \beta$$

where β_1 is estimated by using the first part of the data and β_2 is estimated by using the second part.

The test is performed as follows (see Davidson and MacKinnon 1993, p. 380).

1. The p parameters of the model are estimated.
2. A second linear regression is performed on the residuals, \hat{u} , from the nonlinear estimation in step one.

$$\hat{u} = \hat{\mathbf{X}}b + \text{residuals}$$

where $\hat{\mathbf{X}}$ is Jacobian columns that are evaluated at the parameter estimates. If the estimation is an instrumental variables estimation with matrix of instruments \mathbf{W} , then the following regression is performed:

$$\hat{u} = \mathbf{P}_W \hat{\mathbf{X}}b + \text{residuals}$$

where \mathbf{P}_W is the projection matrix.

3. The restricted SSE (RSSE) from this regression is obtained. An SSE for each subsample is then obtained by using the same linear regression.
4. The F statistic is then

$$f = \frac{(RSSE - SSE_1 - SSE_2)/p}{(SSE_1 + SSE_2)/(n - 2p)}$$

This test has p and $n - 2p$ degrees of freedom.

Chow's test is not applicable if $\min(n_1, n_2) < p$, since one of the two subsamples does not contain enough data to estimate β . In this instance, the *predictive Chow test* can be used. The predictive Chow test is defined as

$$f = \frac{(RSSE - SSE_1) \times (n_1 - p)}{SSE_1 \times n_2}$$

where $n_1 > p$. This test can be derived from the Chow test by noting that the $SSE_2 = 0$ when $n_2 \leq p$ and by adjusting the degrees of freedom appropriately.

You can select the Chow test and the predictive Chow test by specifying the `CHOW=arg` and the `PCHOW=arg` options in the FIT statement, where *arg* is either the number of observations in the first sample or a parenthesized list of first sample sizes. If the size of the one of the two groups in which the sample is partitioned is less than the number of parameters, then a predictive Chow test is automatically used. These tests statistics are not produced for GMM and FIML estimations.

The following is an example of the use of the Chow test.

```

data exp;
  x=0;
  do time=1 to 100;
    if time=50 then x=1;
    y = 35 * exp( 0.01 * time ) + rannor( 123 ) + x * 5;
    output;
  end;
run;

proc model data=exp;
  parm zo 35 b;
  dert.z = b * z;
  y=z;
  fit y init=(z=zo) / chow =(40 50 60) pchow=90;
run;

```

The data set introduces an artificial structural change into the model (the structural change effects the intercept parameter). The output from the requested Chow tests are shown in [Figure 19.55](#).

Figure 19.55 Chow's Test Results

The MODEL Procedure					
Structural Change Test					
Test	Break Point	Num DF	Den DF	F Value	Pr > F
Chow	40	2	96	12.95	<.0001
Chow	50	2	96	101.37	<.0001
Chow	60	2	96	26.43	<.0001
Predictive Chow	90	11	87	1.86	0.0566

Profile Likelihood Confidence Intervals

Wald-based and likelihood-ratio-based confidence intervals are available in the MODEL procedure for computing a confidence interval on an estimated parameter. A confidence interval on a parameter θ can be constructed by inverting a Wald-based or a likelihood-ratio-based test.

The approximate $100(1 - \alpha) \%$ Wald confidence interval for a parameter θ is

$$\hat{\theta} \pm z_{1-\alpha/2} \hat{\sigma}$$

where z_p is the 100 p th percentile of the standard normal distribution, $\hat{\theta}$ is the maximum likelihood estimate of θ , and $\hat{\sigma}$ is the standard error estimate of $\hat{\theta}$.

A likelihood-ratio-based confidence interval is derived from the χ^2 distribution of the generalized likelihood

ratio test. The approximate $1 - \alpha$ confidence interval for a parameter θ is

$$\theta : 2[l(\hat{\theta}) - l(\theta)] \leq q_{1,1-\alpha} = 2l^*$$

where $q_{1,1-\alpha}$ is the $(1 - \alpha)$ quantile of the χ^2 with one degree of freedom, and $l(\theta)$ is the log likelihood as a function of one parameter. The endpoints of a confidence interval are the zeros of the function $l(\theta) - l^*$. Computing a likelihood-ratio-based confidence interval is an iterative process. This process must be performed twice for each parameter, so the computational cost is considerable. Using a modified form of the algorithm recommended by Venzon and Moolgavkar (1988), you can determine that the cost of each endpoint computation is approximately the cost of estimating the original system.

To request confidence intervals on estimated parameters, specify the PRL= option in the FIT statement. By default, the PRL option produces 95% likelihood ratio confidence limits. The coverage of the confidence interval is controlled by the ALPHA= option in the FIT statement.

The following is an example of the use of the confidence interval options.

```
data exp;
  do time = 1 to 20;
    y = 35 * exp( 0.01 * time ) + 5*rannor( 123 );
  output;
  end;
run;

proc model data=exp;
  parm zo 35 b;
  dert.z = b * z;
  y=z;
  fit y init=(z=zo) / prl=both;
  test zo = 40.475437 ,/ lr;
run;
```

The output from the requested confidence intervals and the TEST statement are shown in [Figure 19.56](#)

Figure 19.56 Confidence Interval Estimation

The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
zo	36.58933	1.9471	18.79	<.0001
b	0.006497	0.00464	1.40	0.1780
Test Results				
Test	Type	Statistic	Pr > ChiSq	Label
Test0	L.R.	3.81	0.0509	zo = 40.475437

Figure 19.56 continued

Parameter Wald			
95% Confidence Intervals			
Parameter	Value	Lower	Upper
zo	36.5893	32.7730	40.4056
b	0.00650	-0.00259	0.0156

Parameter Likelihood Ratio			
95% Confidence Intervals			
Parameter	Value	Lower	Upper
zo	36.5893	32.8381	40.4921
b	0.00650	-0.00264	0.0157

In this example the parameter value used in the likelihood ratio test, $z_o = 40.475437$, is close to the upper bound computed for the likelihood ratio confidence interval, $z_o \leq 40.4921$. This coincidence is not germane to the analysis however, since the likelihood ratio test is a test of the null hypothesis $H_0 : z_o = 40.475437$ and the confidence interval can be viewed as a test of the null hypothesis $H_0 : 32.8381 \leq z_o \leq 40.4921$.

Choice of Instruments

Several of the estimation methods supported by PROC MODEL are instrumental variables methods. There is no standard method for choosing instruments for nonlinear regression. Few econometric textbooks discuss the selection of instruments for nonlinear models. See Bowden and Turkington (1984, pp. 180–182) for more information.

The purpose of the instrumental projection is to purge the regressors of their correlation with the residual. For nonlinear systems, the regressors are the partials of the residuals with respect to the parameters.

Possible instrumental variables include the following:

- any variable in the model that is independent of the errors
- lags of variables in the system
- derivatives with respect to the parameters, if the derivatives are independent of the errors
- low-degree polynomials in the exogenous variables
- variables from the data set or functions of variables from the data set

Selected instruments must not have any of the following characteristics:

- depend on any variable endogenous with respect to the equations estimated
- depend on any of the parameters estimated
- be lags of endogenous variables if there is serial correlation of the errors

If the preceding rules are satisfied and there are enough observations to support the number of instruments used, the results should be consistent and the efficiency loss held to a minimum.

You need at least as many instruments as the maximum number of parameters in any equation, or some of the parameters cannot be estimated. Note that *number of instruments* means linearly independent instruments. If you add an instrument that is a linear combination of other instruments, it has no effect and does not increase the effective number of instruments.

You can, however, use too many instruments. In order to get the benefit of instrumental variables, you must have more observations than instruments. Thus, there is a trade-off; the instrumental variables technique completely eliminates the simultaneous equation bias only in large samples. In finite samples, the larger the excess of observations over instruments, the more the bias is reduced. Adding more instruments might improve the efficiency, but after some point efficiency declines as the excess of observations over instruments becomes smaller and the bias grows.

The instruments used in an estimation are printed out at the beginning of the estimation. For example, the following statements produce the instruments list shown in Figure 19.57.

```
proc model data=test2;
  exogenous x1 x2;
  parms b1 a1 a2 b2 2.5 c2 55;
  y1 = a1 * y2 + b1 * exp(x1);
  y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2;
  fit y1 y2 / n2s1s;
  inst b1 b2 c2 x1 ;
run;
```

Figure 19.57 Instruments Used Message

<p style="text-align: center;">The MODEL Procedure</p> <p style="text-align: center;">The 2 Equations to Estimate</p> <p style="text-align: center;">y1 = F(b1, a1(y2)) y2 = F(a2(y1), b2, c2)</p> <p style="text-align: center;">Instruments 1 x1 @y1/@b1 @y2/@b2 @y2/@c2</p>

This states that an intercept term, the exogenous variable X1, and the partial derivatives of the equations with respect to B1, B2, and C2, were used as instruments for the estimation.

Examples

Suppose that Y1 and Y2 are endogenous variables, that X1 and X2 are exogenous variables, and that A, B, C, D, E, F, and G are parameters. Consider the following model:

```
y1 = a + b * x1 + c * y2 + d * lag(y1);
y2 = e + f * x2 + g * y1;
fit y1 y2;
instruments exclude=(c g);
```

The INSTRUMENTS statement produces X1, X2, LAG(Y1), and an intercept as instruments.

In order to estimate the Y1 equation by itself, it is necessary to include X2 explicitly in the instruments since F, in this case, is not included in the following estimation:

```
y1 = a + b * x1 + c * y2 + d * lag(y1);
y2 = e + f * x2 + g * y1;
fit y1;
instruments x2 exclude=(c);
```

This produces the same instruments as before. You can list the parameter associated with the lagged variable as an instrument instead of using the EXCLUDE= option. Thus, the following is equivalent to the previous example:

```
y1 = a + b * x1 + c * y2 + d * lag(y1);
y2 = e + f * x2 + g * y1;
fit y1;
instruments x1 x2 d;
```

For an example of declaring instruments when estimating a model involving identities, consider Klein's Model I:

```
proc model data=klien;
  endogenous c p w i x wsum k y;
  exogenous wp g t year;
  parms c0-c3 i0-i3 w0-w3;
  a: c = c0 + c1 * p + c2 * lag(p) + c3 * wsum;
  b: i = i0 + i1 * p + i2 * lag(p) + i3 * lag(k);
  c: w = w0 + w1 * x + w2 * lag(x) + w3 * year;
  x = c + i + g;
  y = c + i + g-t;
  p = x-w-t;
  k = lag(k) + i;
  wsum = w + wp;
run;
```

The three equations to estimate are identified by the labels A, B, and C. The parameters associated with the predetermined terms are C2, I2, I3, W2, and W3 (and the intercepts, which are automatically added to the instruments). In addition, the system includes five identities that contain the predetermined variables G, T, LAG(K), and WP. Thus, the INSTRUMENTS statement can be written as

```
lagk = lag(k);
instruments c2 i2 i3 w2 w3 g t wp lagk;
```

where LAGK is a program variable used to hold LAG(K). However, this is more complicated than it needs to be. Except for LAG(K), all the predetermined terms in the identities are exogenous variables, and LAG(K) is already included as the coefficient of I3. There are also more parameters for predetermined terms than for endogenous terms, so you might prefer to use the EXCLUDE= option. Thus, you can specify the same instruments list with the simpler statement

```
instruments _exog_ exclude=(c1 c3 i1 w1);
```

To illustrate the use of polynomial terms as instrumental variables, consider the following model:

$$y_1 = a + b * \exp(c * x_1) + d * \log(x_2) + e * \exp(f * y_2);$$

The parameters are A, B, C, D, E, and F, and the right-hand-side variables are X1, X2, and Y2. Assume that X1 and X2 are exogenous (independent of the error), while Y2 is endogenous. The equation for Y2 is not specified, but assume that it includes the variables X1, X3, and Y1, with X3 exogenous, so the exogenous variables of the full system are X1, X2, and X3. Using as instruments quadratic terms in the exogenous variables, the model is specified to PROC MODEL as follows:

```
proc model;
  parms a b c d e f;
  y1 = a + b * exp( c * x1 ) + d * log( x2 ) + e * exp( f * y2 );
  instruments inst1-inst9;
  inst1 = x1; inst2 = x2; inst3 = x3;
  inst4 = x1 * x1; inst5 = x1 * x2; inst6 = x1 * x3;
  inst7 = x2 * x2; inst8 = x2 * x3; inst9 = x3 * x3;
  fit y1 / 2s1s;
run;
```

It is not clear what degree polynomial should be used. There is no way to know how good the approximation is for any degree chosen, although the first-stage R^2 s might help the assessment.

First-Stage R-Squares

When the FSRSQ option is used on the FIT statement, the MODEL procedure prints a column of first-stage R^2 (FSRSQ) statistics along with the parameter estimates. The FSRSQ measures the fraction of the variation of the derivative column associated with the parameter that remains after projection through the instruments.

Ideally, the FSRSQ should be very close to 1.00 for exogenous derivatives. If the FSRSQ is small for an endogenous derivative, it is unclear whether this reflects a poor choice of instruments or a large influence of the errors in the endogenous right-hand-side variables. When the FSRSQ for one or more parameters is small, the standard errors of the parameter estimates are likely to be large.

Note that you can make all the FSRSQs larger (or 1.00) by including more instruments, because of the disadvantage discussed previously. The FSRSQ statistics reported are unadjusted R^2 s and do not include a degrees-of-freedom correction.

Autoregressive Moving-Average Error Processes

Autoregressive moving-average error processes (ARMA errors) and other models that involve lags of error terms can be estimated by using FIT statements and simulated or forecast by using SOLVE statements.

ARMA models for the error process are often used for models with autocorrelated residuals. The %AR macro can be used to specify models with autoregressive error processes. The %MA macro can be used to specify models with moving-average error processes.

Autoregressive Errors

A model with first-order autoregressive errors, AR(1), has the form

$$y_t = f(x_t, \theta) + \mu_t$$

$$\mu_t = \phi \mu_{t-1} + \epsilon_t$$

while an AR(2) error process has the form

$$\mu_t = \phi_1 \mu_{t-1} + \phi_2 \mu_{t-2} + \epsilon_t$$

and so forth for higher-order processes. Note that the ϵ_t 's are independent and identically distributed and have an expected value of 0.

An example of a model with an AR(2) component is

$$y = \alpha + \beta x_1 + \mu_t$$

$$\mu_t = \phi_1 \mu_{t-1} + \phi_2 \mu_{t-2} + \epsilon_t$$

You would write this model as

```
proc model data=in;
  parms a b p1 p2;
  y = a + b * x1 + p1 * zlag1(y - (a + b * x1)) +
      p2 * zlag2(y - (a + b * x1));
  fit y;
run;
```

or equivalently using the %AR macro as

```
proc model data=in;
  parms a b;
  y = a + b * x1;
  %ar( y, 2 );
  fit y;
run;
```

Moving-Average Models

A model with first-order moving-average errors, MA(1), has the form

$$y_t = f(x_t) + \mu_t$$

$$\mu_t = \epsilon_t - \theta_1 \epsilon_{t-1}$$

where ϵ_t is identically and independently distributed with mean zero. An MA(2) error process has the form

$$\mu_t = \epsilon_t - \theta_1\epsilon_{t-1} - \theta_2\epsilon_{t-2}$$

and so forth for higher-order processes.

For example, you can write a simple linear regression model with MA(2) moving-average errors as

```
proc model data=inma2;
  parms a b ma1 ma2;
  y = a + b * x + ma1 * zlag1( resid.y ) +
      ma2 * zlag2( resid.y );
  fit;
run;
```

where MA1 and MA2 are the moving-average parameters.

Note that RESID.Y is automatically defined by PROC MODEL as

```
pred.y = a + b * x + ma1 * zlag1( resid.y ) +
      ma2 * zlag2( resid.y );
resid.y = pred.y - actual.y;
```

Note that RESID.Y is negative of ϵ_t .

The ZLAG function must be used for MA models to truncate the recursion of the lags. This ensures that the lagged errors start at zero in the lag-priming phase and do not propagate missing values when lag-priming period variables are missing, and it ensures that the future errors are zero rather than missing during simulation or forecasting. For details about the lag functions, see the section “[Lag Logic](#)” on page 1237.

This model written using the %MA macro is as follows:

```
proc model data=inma2;
  parms a b;
  y = a + b * x;
  %ma(y, 2);
  fit;
run;
```

General Form for ARMA Models

The general ARMA(p, q) process has the following form

$$\mu_t = \phi_1\mu_{t-1} + \dots + \phi_p\mu_{t-p} + \epsilon_t - \theta_1\epsilon_{t-1} - \dots - \theta_q\epsilon_{t-q}$$

An ARMA(p, q) model can be specified as follows:

```

yhat = ... compute structural predicted value here ... ;
yarma = ar1 * zlag1( y - yhat ) + ... /* ar part */
        + ar(p) * zlag(p)( y - yhat )
        + ma1 * zlag1( resid.y ) + ... /* ma part */
        + ma(q) * zlag(q)( resid.y );
y = yhat + yarma;

```

where AR_i and MA_j represent the autoregressive and moving-average parameters for the various lags. You can use any names you want for these variables, and there are many equivalent ways that the specification could be written.

Vector ARMA processes can also be estimated with PROC MODEL. For example, a two-variable AR(1) process for the errors of the two endogenous variables Y1 and Y2 can be specified as follows:

```

y1hat = ... compute structural predicted value here ... ;

y1      = y1hat + ar1_1 * zlag1( y1 - y1hat ) /* ar part y1,y1 */
          + ar1_2 * zlag1( y2 - y2hat ); /* ar part y1,y2 */

y21hat = ... compute structural predicted value here ... ;

y2      = y2hat + ar2_2 * zlag1( y2 - y2hat ) /* ar part y2,y2 */
          + ar2_1 * zlag1( y1 - y1hat ); /* ar part y2,y1 */

```

Convergence Problems with ARMA Models

ARMA models can be difficult to estimate. If the parameter estimates are not within the appropriate range, a moving-average model's residual terms grow exponentially. The calculated residuals for later observations can be very large or can overflow. This can happen either because improper starting values were used or because the iterations moved away from reasonable values.

Care should be used in choosing starting values for ARMA parameters. Starting values of 0.001 for ARMA parameters usually work if the model fits the data well and the problem is well-conditioned. Note that an MA model can often be approximated by a high-order AR model, and vice versa. This can result in high collinearity in mixed ARMA models, which in turn can cause serious ill-conditioning in the calculations and instability of the parameter estimates.

If you have convergence problems while estimating a model with ARMA error processes, try to estimate in steps. First, use a FIT statement to estimate only the structural parameters with the ARMA parameters held to zero (or to reasonable prior estimates if available). Next, use another FIT statement to estimate the ARMA parameters only, using the structural parameter values from the first run. Since the values of the structural parameters are likely to be close to their final estimates, the ARMA parameter estimates might now converge. Finally, use another FIT statement to produce simultaneous estimates of all the parameters. Since the initial values of the parameters are now likely to be quite close to their final joint estimates, the estimates should converge quickly if the model is appropriate for the data.

AR Initial Conditions

The initial lags of the error terms of $AR(p)$ models can be modeled in different ways. The autoregressive error startup methods supported by SAS/ETS procedures are the following:

CLS	conditional least squares (ARIMA and MODEL procedures)
ULS	unconditional least squares (AUTOREG, ARIMA, and MODEL procedures)
ML	maximum likelihood (AUTOREG, ARIMA, and MODEL procedures)
YW	Yule-Walker (AUTOREG procedure only)
HL	Hildreth-Lu, which deletes the first p observations (MODEL procedure only)

See Chapter 8, “[The AUTOREG Procedure](#),” for an explanation and discussion of the merits of various $AR(p)$ startup methods.

The CLS, ULS, ML, and HL initializations can be performed by PROC MODEL. For $AR(1)$ errors, these initializations can be produced as shown in [Table 19.3](#). These methods are equivalent in large samples.

Table 19.3 Initializations Performed by PROC MODEL: $AR(1)$ ERRORS

Method	Formula
conditional least squares	$Y = YHAT + AR1 * ZLAG1(Y - YHAT);$
unconditional least squares	$Y = YHAT + AR1 * ZLAG1(Y - YHAT);$ IF _OBS_=1 THEN $RESID.Y = SQRT(1 - AR1**2) * RESID.Y;$
maximum likelihood	$Y = YHAT + AR1 * ZLAG1(Y - YHAT);$ $W = (1 - AR1**2)**(-1/(2 * _NUSED_));$ IF _OBS_=1 THEN $W = W * SQRT(1 - AR1**2);$ $RESID.Y = W * RESID.Y;$
Hildreth-Lu	$Y = YHAT + AR1 * LAG1(Y - YHAT);$

MA Initial Conditions

The initial lags of the error terms of $MA(q)$ models can also be modeled in different ways. The following moving-average error start-up paradigms are supported by the ARIMA and MODEL procedures:

ULS	unconditional least squares
CLS	conditional least squares
ML	maximum likelihood

The conditional least squares method of estimating moving-average error terms is not optimal because it ignores the start-up problem. This reduces the efficiency of the estimates, although they remain unbiased.

The initial lagged residuals, extending before the start of the data, are assumed to be 0, their unconditional expected value. This introduces a difference between these residuals and the generalized least squares residuals for the moving-average covariance, which, unlike the autoregressive model, persists through the data set. Usually this difference converges quickly to 0, but for nearly noninvertible moving-average processes the convergence is quite slow. To minimize this problem, you should have plenty of data, and the moving-average parameter estimates should be well within the invertible range.

This problem can be corrected at the expense of writing a more complex program. Unconditional least squares estimates for the MA(1) process can be produced by specifying the model as follows:

```
yhat = ... compute structural predicted value here ... ;
if _obs_ = 1 then do;
  h = sqrt( 1 + ma1 ** 2 );
  y = yhat;
  resid.y = ( y - yhat ) / h;
end;
else do;
  g = ma1 / zlag1( h );
  h = sqrt( 1 + ma1 ** 2 - g ** 2 );
  y = yhat + g * zlag1( resid.y );
  resid.y = ( ( y - yhat ) - g * zlag1( resid.y ) ) / h;
end;
```

Moving-average errors can be difficult to estimate. You should consider using an $AR(p)$ approximation to the moving-average process. A moving-average process can usually be well-approximated by an autoregressive process if the data have not been smoothed or differenced.

The %AR Macro

The SAS macro %AR generates programming statements for PROC MODEL for autoregressive models. The %AR macro is part of SAS/ETS software, and no special options need to be set to use the macro. The autoregressive process can be applied to the structural equation errors or to the endogenous series themselves.

The %AR macro can be used for the following types of autoregression:

- univariate autoregression
- unrestricted vector autoregression
- restricted vector autoregression

Univariate Autoregression

To model the error term of an equation as an autoregressive process, use the following statement after the equation:

```
%ar( varname, nlags )
```

For example, suppose that Y is a linear function of X_1 , X_2 , and an AR(2) error. You would write this model as follows:

```
proc model data=in;
  parms a b c;
  y = a + b * x1 + c * x2;
  %ar( y, 2 )
  fit y / list;
run;
```

The calls to %AR must come *after* all of the equations that the process applies to.

The preceding macro invocation, %AR(y,2), produces the statements shown in the LIST output in Figure 19.58.

Figure 19.58 LIST Option Output for an AR(2) Model

The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	2260:4	PRED.y = a + b * x1 + c * x2;
1	2260:4	RESID.y = PRED.y - ACTUAL.y;
1	2260:4	ERROR.y = PRED.y - y;
2	2261:14	_PRED__y = PRED.y;
3	2261:15	_OLD_PRED.y = PRED.y + y_11
		* ZLAG1(y - _PRED__y) + y_12
		* ZLAG2(y - _PRED__y);
3	2261:15	PRED.y = _OLD_PRED.y;
3	2261:15	RESID.y = PRED.y - ACTUAL.y;
3	2261:15	ERROR.y = PRED.y - y;

The _PRED__ prefixed variables are temporary program variables used so that the lags of the residuals are the correct residuals and not the ones redefined by this equation. Note that this is equivalent to the statements explicitly written in the section “General Form for ARMA Models” on page 1167.

You can also restrict the autoregressive parameters to zero at selected lags. For example, if you wanted autoregressive parameters at lags 1, 12, and 13, you can use the following statements:

```
proc model data=in;
  parms a b c;
  y = a + b * x1 + c * x2;
  %ar( y, 13, , 1 12 13 )
  fit y / list;
run;
```

These statements generate the output shown in Figure 19.59.

Figure 19.59 LIST Option Output for an AR Model with Lags at 1, 12, and 13

The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	2269:4	PRED.y = a + b * x1 + c * x2;
1	2269:4	RESID.y = PRED.y - ACTUAL.y;
1	2269:4	ERROR.y = PRED.y - y;
2	2270:14	_PRED__y = PRED.y;
3	2270:15	_OLD_PRED.y = PRED.y + y_l1 * ZLAG1(y - _PRED__y) + y_l12 * ZLAG12(y - _PRED__y) + y_l13 * ZLAG13(y - _PRED__y);
3	2270:15	PRED.y = _OLD_PRED.y;
3	2270:15	RESID.y = PRED.y - ACTUAL.y;
3	2270:15	ERROR.y = PRED.y - y;

There are variations on the conditional least squares method, depending on whether observations at the start of the series are used to “warm up” the AR process. By default, the %AR conditional least squares method uses all the observations and assumes zeros for the initial lags of autoregressive terms. By using the M= option, you can request that %AR use the unconditional least squares (ULS) or maximum-likelihood (ML) method instead. For example,

```
proc model data=in;
  y = a + b * x1 + c * x2;
  %ar( y, 2, m=uls )
  fit y;
run;
```

Discussions of these methods is provided in the section “AR Initial Conditions” on page 1169.

By using the M=CLS*n* option, you can request that the first *n* observations be used to compute estimates of the initial autoregressive lags. In this case, the analysis starts with observation *n* + 1. For example:

```
proc model data=in;
  y = a + b * x1 + c * x2;
  %ar( y, 2, m=cls2 )
  fit y;
run;
```

You can use the %AR macro to apply an autoregressive model to the endogenous variable, instead of to the error term, by using the TYPE=V option. For example, if you want to add the five past lags of Y to the equation in the previous example, you could use %AR to generate the parameters and lags by using the following statements:

```
proc model data=in;
  parms a b c;
  y = a + b * x1 + c * x2;
  %ar( y, 5, type=v )
  fit y / list;
run;
```

The preceding statements generate the output shown in Figure 19.60.

Figure 19.60 LIST Option Output for an AR model of Y

The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	2292:4	PRED.y = a + b * x1 + c * x2;
1	2292:4	RESID.y = PRED.y - ACTUAL.y;
1	2292:4	ERROR.y = PRED.y - y;
2	2293:15	_OLD_PRED.y = PRED.y + y_l1 * ZLAG1(y) + y_l2 * ZLAG2(y) + y_l3 * ZLAG3(y) + y_l4 * ZLAG4(y) + y_l5 * ZLAG5(y);
2	2293:15	PRED.y = _OLD_PRED.y;
2	2293:15	RESID.y = PRED.y - ACTUAL.y;
2	2293:15	ERROR.y = PRED.y - y;

This model predicts Y as a linear combination of X1, X2, an intercept, and the values of Y in the most recent five periods.

Unrestricted Vector Autoregression

To model the error terms of a set of equations as a vector autoregressive process, use the following form of the %AR macro after the equations:

```
%ar( process_name, nlags, variable_list )
```

The *process_name* value is any name that you supply for %AR to use in making names for the autoregressive parameters. You can use the %AR macro to model several different AR processes for different sets of equations by using different process names for each set. The process name ensures that the variable names used are unique. Use a short *process_name* value for the process if parameter estimates are to be written to an output data set. The %AR macro tries to construct parameter names less than or equal to eight characters, but this is limited by the length of *process_name*, which is used as a prefix for the AR parameter names.

The *variable_list* value is the list of endogenous variables for the equations.

For example, suppose that errors for equations Y1, Y2, and Y3 are generated by a second-order vector autoregressive process. You can use the following statements:

```
proc model data=in;
  y1 = ... equation for y1 ...;
  y2 = ... equation for y2 ...;
  y3 = ... equation for y3 ...;
  %ar( name, 2, y1 y2 y3 )
  fit y1 y2 y3;
run;
```

which generate the following for Y1 and similar code for Y2 and Y3:

```
y1 = pred.y1 + name1_1_1*zlag1(y1-name_y1) +
      name1_1_2*zlag1(y2-name_y2) +
      name1_1_3*zlag1(y3-name_y3) +
      name2_1_1*zlag2(y1-name_y1) +
      name2_1_2*zlag2(y2-name_y2) +
      name2_1_3*zlag2(y3-name_y3) ;
```

Only the conditional least squares (M=CLS or M=CLSn) method can be used for vector processes.

You can also use the same form with restrictions that the coefficient matrix be 0 at selected lags. For example, the following statements apply a third-order vector process to the equation errors with all the coefficients at lag 2 restricted to 0 and with the coefficients at lags 1 and 3 unrestricted:

```
proc model data=in;
  y1 = ... equation for y1 ...;
  y2 = ... equation for y2 ...;
  y3 = ... equation for y3 ...;
  %ar( name, 3, y1 y2 y3, 1 3 )
  fit y1 y2 y3;
```

You can model the three series Y1–Y3 as a vector autoregressive process in the variables instead of in the errors by using the TYPE=V option. If you want to model Y1–Y3 as a function of past values of Y1–Y3 and some exogenous variables or constants, you can use %AR to generate the statements for the lag terms. Write an equation for each variable for the nonautoregressive part of the model, and then call %AR with the TYPE=V option. For example,

```
proc model data=in;
  parms a1-a3 b1-b3;
  y1 = a1 + b1 * x;
  y2 = a2 + b2 * x;
  y3 = a3 + b3 * x;
  %ar( name, 2, y1 y2 y3, type=v )
  fit y1 y2 y3;
run;
```

The nonautoregressive part of the model can be a function of exogenous variables, or it can be intercept parameters. If there are no exogenous components to the vector autoregression model, including no intercepts, then assign zero to each of the variables. There must be an assignment to each of the variables before %AR is called.

```
proc model data=in;
  y1=0;
  y2=0;
  y3=0;
  %ar( name, 2, y1 y2 y3, type=v )
  fit y1 y2 y3;
run;
```


This example models the vector $Y=(Y1 \ Y2 \ Y3)'$ as a linear function only of its value in the previous two periods and a white noise error vector. The model has $18=(3 \times 3 + 3 \times 3)$ parameters.

Syntax of the %AR Macro

There are two cases of the syntax of the %AR macro. When restrictions on a vector AR process are not needed, the syntax of the %AR macro has the general form

%AR (*name* , *nlag* < ,*endolist* < , *laglist* > > < ,*M=method* > < ,*TYPE=V* >) ;

where

<i>name</i>	specifies a prefix for %AR to use in constructing names of variables needed to define the AR process. If the <i>endolist</i> is not specified, the endogenous list defaults to <i>name</i> , which must be the name of the equation to which the AR error process is to be applied. The <i>name</i> value cannot exceed 32 characters.
<i>nlag</i>	is the order of the AR process.
<i>endolist</i>	specifies the list of equations to which the AR process is to be applied. If more than one name is given, an unrestricted vector process is created with the structural residuals of all the equations included as regressors in each of the equations. If not specified, <i>endolist</i> defaults to <i>name</i> .
<i>laglist</i>	specifies the list of lags at which the AR terms are to be added. The coefficients of the terms at lags not listed are set to 0. All of the listed lags must be less than or equal to <i>nlag</i> , and there must be no duplicates. If not specified, the <i>laglist</i> defaults to all lags 1 through <i>nlag</i> .
<i>M=method</i>	specifies the estimation method to implement. Valid values of <i>M=</i> are CLS (conditional least squares estimates), ULS (unconditional least squares estimates), and ML (maximum likelihood estimates). <i>M=CLS</i> is the default. Only <i>M=CLS</i> is allowed when more than one equation is specified. The ULS and ML methods are not supported for vector AR models by %AR.
<i>TYPE=V</i>	specifies that the AR process is to be applied to the endogenous variables themselves instead of to the structural residuals of the equations.

Restricted Vector Autoregression

You can control which parameters are included in the process, restricting to 0 those parameters that you do not include. First, use %AR with the DEFER option to declare the variable list and define the dimension of the process. Then, use additional %AR calls to generate terms for selected equations with selected variables at selected lags. For example,

```
proc model data=d;
  y1 = ... equation for y1 ...;
  y2 = ... equation for y2 ...;
  y3 = ... equation for y3 ...;
  %ar( name, 2, y1 y2 y3, defer )
```

```

%ar( name, y1, y1 y2 )
%ar( name, y2 y3, , 1 )
fit y1 y2 y3;
run;

```

The error equations produced are as follows:

```

y1 = pred.y1 + name1_1_1*zlag1(y1-name_y1) +
      name1_1_2*zlag1(y2-name_y2) + name2_1_1*zlag2(y1-name_y1) +
      name2_1_2*zlag2(y2-name_y2) ;
y2 = pred.y2 + name1_2_1*zlag1(y1-name_y1) +
      name1_2_2*zlag1(y2-name_y2) + name1_2_3*zlag1(y3-name_y3) ;
y3 = pred.y3 + name1_3_1*zlag1(y1-name_y1) +
      name1_3_2*zlag1(y2-name_y2) + name1_3_3*zlag1(y3-name_y3) ;

```

This model states that the errors for Y1 depend on the errors of both Y1 and Y2 (but not Y3) at both lags 1 and 2, and that the errors for Y2 and Y3 depend on the previous errors for all three variables, but only at lag 1.

%AR Macro Syntax for Restricted Vector AR

An alternative use of %AR is allowed to impose restrictions on a vector AR process by calling %AR several times to specify different AR terms and lags for different equations.

The first call has the general form

```
%AR( name, nlag, endolist , DEFER ) ;
```

where

<i>name</i>	specifies a prefix for %AR to use in constructing names of variables needed to define the vector AR process.
<i>nlag</i>	specifies the order of the AR process.
<i>endolist</i>	specifies the list of equations to which the AR process is to be applied.
DEFER	specifies that %AR is not to generate the AR process but is to wait for further information specified in later %AR calls for the same <i>name</i> value.

The subsequent calls have the general form

```
%AR( name, eqlist, varlist, laglist, TYPE= )
```

where

name is the same as in the first call.

<i>eqlist</i>	specifies the list of equations to which the specifications in this %AR call are to be applied. Only names specified in the <i>endolist</i> value of the first call for the <i>name</i> value can appear in the list of equations in <i>eqlist</i> .
<i>varlist</i>	specifies the list of equations whose lagged structural residuals are to be included as regressors in the equations in <i>eqlist</i> . Only names in the <i>endolist</i> of the first call for the <i>name</i> value can appear in <i>varlist</i> . If not specified, <i>varlist</i> defaults to <i>endolist</i> .
<i>laglist</i>	specifies the list of lags at which the AR terms are to be added. The coefficients of the terms at lags not listed are set to 0. All of the listed lags must be less than or equal to the value of <i>nlag</i> , and there must be no duplicates. If not specified, <i>laglist</i> defaults to all lags 1 through <i>nlag</i> .

The %MA Macro

The SAS macro %MA generates programming statements for PROC MODEL for moving-average models. The %MA macro is part of SAS/ETS software, and no special options are needed to use the macro. The moving-average error process can be applied to the structural equation errors. The syntax of the %MA macro is the same as the %AR macro except there is no TYPE= argument.

When you are using the %MA and %AR macros combined, the %MA macro must follow the %AR macro. The following SAS/IML statements produce an ARMA(1, (1 3)) error process and save it in the data set MADAT2.

```
proc iml;
  phi = { 1 .2 };
  theta = { 1 .3 0 .5 };
  y = armasim( phi, theta, 0, .1, 200, 32565 );
  create madat2 from y[colname='y'];
  append from y;
quit;
```

The following PROC MODEL statements are used to estimate the parameters of this model by using maximum likelihood error structure:

```
title 'Maximum Likelihood ARMA(1, (1 3))';
proc model data=madat2;
  y=0;
  %ar( y, 1, , M=m1 )
  %ma( y, 3, , 1 3, M=m1 ) /* %MA always after %AR */
  fit y;
run;
title;
```

The estimates of the parameters produced by this run are shown in [Figure 19.61](#).

Figure 19.61 Estimates from an ARMA(1, (1 3)) Process

Maximum Likelihood ARMA(1, (1 3))							
The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
y	3	197	2.6383	0.0134	0.1157	-0.0067	-0.0169
RESID.y		197	1.9957	0.0101	0.1007		
Nonlinear OLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label		
y_l1	-0.10067	0.1187	-0.85	0.3973	AR(y) y lag1 parameter		
y_m1	-0.1934	0.0939	-2.06	0.0408	MA(y) y lag1 parameter		
y_m3	-0.59384	0.0601	-9.88	<.0001	MA(y) y lag3 parameter		

Syntax of the %MA Macro

There are two cases of the syntax for the %MA macro. When restrictions on a vector MA process are not needed, the syntax of the %MA macro has the general form

```
%MA ( name , nlag < , endolist < , laglist >> < , M= method > ) ;
```

where

- | | |
|-----------------|---|
| <i>name</i> | specifies a prefix for %MA to use in constructing names of variables needed to define the MA process and is the default <i>endolist</i> . |
| <i>nlag</i> | is the order of the MA process. |
| <i>endolist</i> | specifies the equations to which the MA process is to be applied. If more than one name is given, CLS estimation is used for the vector process. |
| <i>laglist</i> | specifies the lags at which the MA terms are to be added. All of the listed lags must be less than or equal to <i>nlag</i> , and there must be no duplicates. If not specified, the <i>laglist</i> defaults to all lags 1 through <i>nlag</i> . |
| <i>M=method</i> | specifies the estimation method to implement. Valid values of M= are CLS (conditional least squares estimates), ULS (unconditional least squares estimates), and ML (maximum likelihood estimates). M=CLS is the default. Only M=CLS is allowed when more than one equation is specified in the <i>endolist</i> . |

%MA Macro Syntax for Restricted Vector Moving-Average

An alternative use of %MA is allowed to impose restrictions on a vector MA process by calling %MA several times to specify different MA terms and lags for different equations.

The first call has the general form

```
%MA( name , nlag , endolist , DEFER ) ;
```

where

<i>name</i>	specifies a prefix for %MA to use in constructing names of variables needed to define the vector MA process.
<i>nlag</i>	specifies the order of the MA process.
<i>endolist</i>	specifies the list of equations to which the MA process is to be applied.
DEFER	specifies that %MA is not to generate the MA process but is to wait for further information specified in later %MA calls for the same <i>name</i> value.

The subsequent calls have the general form

```
%MA( name, eqlist, varlist, laglist )
```

where

<i>name</i>	is the same as in the first call.
<i>eqlist</i>	specifies the list of equations to which the specifications in this %MA call are to be applied.
<i>varlist</i>	specifies the list of equations whose lagged structural residuals are to be included as regressors in the equations in <i>eqlist</i> .
<i>laglist</i>	specifies the list of lags at which the MA terms are to be added.

Distributed Lag Models and the %PDL Macro

In the following example, the variable y is modeled as a linear function of x , the first lag of x , the second lag of x , and so forth:

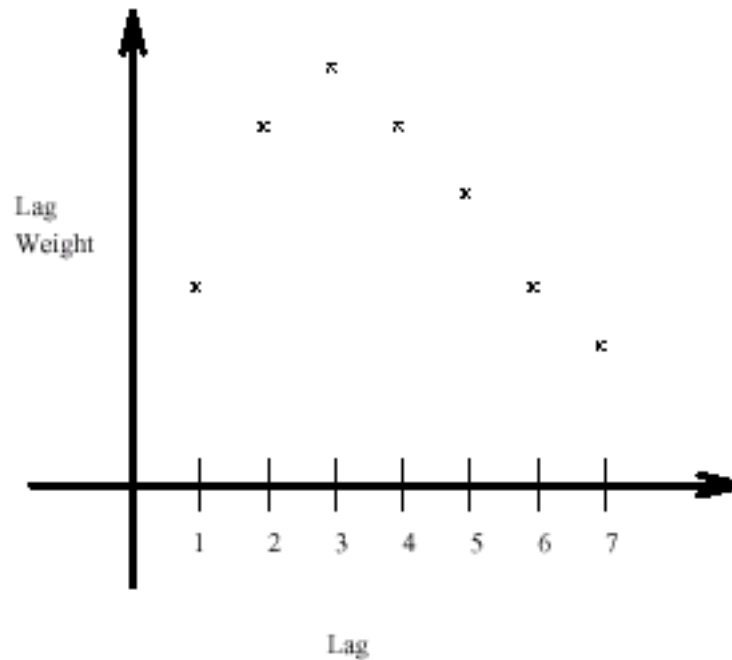
$$y_t = a + b_0 x_t + b_1 x_{t-1} + b_2 x_{t-2} + b_3 x_{t-3} + \dots + b_n x_{t-n}$$

Models of this sort can introduce a great many parameters for the lags, and there may not be enough data to compute accurate independent estimates for them all. Often, the number of parameters is reduced by assuming that the lag coefficients follow some pattern. One common assumption is that the lag coefficients follow a polynomial in the lag length

$$b_i = \sum_{j=0}^d \alpha_j (i)^j$$

where d is the degree of the polynomial used. Models of this kind are called *Almon lag models*, *polynomial distributed lag models*, or *PDLs* for short. For example, Figure 19.62 shows the lag distribution that can be modeled with a low-order polynomial. Endpoint restrictions can be imposed on a PDL to require that the lag coefficients be 0 at the 0th lag, or at the final lag, or at both.

Figure 19.62 Polynomial Distributed Lags



For linear single-equation models, SAS/ETS software includes the PDLREG procedure for estimating PDL models. See Chapter 21, “[The PDLREG Procedure](#),” for a more detailed discussion of polynomial distributed lags and an explanation of endpoint restrictions.

Polynomial and other distributed lag models can be estimated and simulated or forecast with PROC MODEL. For polynomial distributed lags, the %PDL macro can generate the needed programming statements automatically.

The %PDL Macro

The SAS macro %PDL generates the programming statements to compute the lag coefficients of polynomial distributed lag models and to apply them to the lags of variables or expressions.

To use the %PDL macro in a model program, you first call it to declare the lag distribution; later, you call it again to apply the PDL to a variable or expression. The first call generates a PARMS statement for the polynomial parameters and assignment statements to compute the lag coefficients. The second call generates an expression that applies the lag coefficients to the lags of the specified variable or expression. A PDL can be declared only once, but it can be used any number of times (that is, the second call can be repeated).

The initial declaratory call has the general form

%PDL (*pdlname*, *nlags*, *degree* , *R=code* , *OUTEST=dataset*) ;

where *pdlname* is a name (up to 32 characters) that you give to identify the PDL, *nlags* is the lag length, and *degree* is the degree of the polynomial for the distribution. The *R=code* is optional for endpoint restrictions. The value of *code* can be FIRST (for upper), LAST (for lower), or BOTH (for both upper and lower endpoints). See Chapter 21, “[The PDLREG Procedure](#),” for a discussion of endpoint restrictions. The option *OUTEST=dataset* creates a data set that contains the estimates of the parameters and their covariance matrix.

The later calls to apply the PDL have the general form

%PDL(*pdlname*, *expression*)

where *pdlname* is the name of the PDL and *expression* is the variable or expression to which the PDL is to be applied. The *pdlname* given must be the same as the name used to declare the PDL.

The following statements produce the output in [Figure 19.63](#):

```
proc model data=in list;
  parms int pz;
  %pdl(xpdl,5,2);
  y = int + pz * z + %pdl(xpdl,x);
  %ar(y,2,M=ULS);
  id i;
fit y / out=model1 outresid converge=1e-6;
run;
```

Figure 19.63 %PDL Macro Estimates

The MODEL Procedure					
Nonlinear OLS Estimates					
Term	Estimate	Approx Std Err	t Value	Approx Pr > t	Label
XPDL_L0	1.568788	0.0935	16.77	<.0001	PDL(XPDL,5,2) coefficient for lag0
XPDL_L1	0.564917	0.0328	17.22	<.0001	PDL(XPDL,5,2) coefficient for lag1
XPDL_L2	-0.05063	0.0593	-0.85	0.4155	PDL(XPDL,5,2) coefficient for lag2
XPDL_L3	-0.27785	0.0517	-5.37	0.0004	PDL(XPDL,5,2) coefficient for lag3
XPDL_L4	-0.11675	0.0368	-3.17	0.0113	PDL(XPDL,5,2) coefficient for lag4
XPDL_L5	0.43267	0.1362	3.18	0.0113	PDL(XPDL,5,2) coefficient for lag5

This second example models two variables, Y1 and Y2, and uses two PDLs:

```

proc model data=in;
  parms int1 int2;
  %pdl( logxpdl, 5, 3 )
  %pdl( zpdl, 6, 4 )
  y1 = int1 + %pdl( logxpdl, log(x) ) + %pdl( zpdl, z );
  y2 = int2 + %pdl( zpdl, z );
  fit y1 y2;
run;

```

A (5,3) PDL of the log of X is used in the equation for Y1. A (6,4) PDL of Z is used in the equations for both Y1 and Y2. Since the same ZPDL is used in both equations, the lag coefficients for Z are the same for the Y1 and Y2 equations, and the polynomial parameters for ZPDL are shared by the two equations. See [Example 19.5](#) for a complete example and comparison with PDLREG.

Input Data Sets

DATA= Input Data Set

For FIT tasks, the DATA= option specifies which input data set to use in estimating parameters. Variables in the model program are looked up in the DATA= data set and, if found, their attributes (type, length, label, and format) are set to be the same as those in the DATA= data set (if not defined otherwise within PROC MODEL).

ESTDATA= Input Data Set

The ESTDATA= option specifies an input data set that contains an observation that gives values for some or all of the model parameters. The data set can also contain observations that give the rows of a covariance matrix for the parameters.

Parameter values read from the ESTDATA= data set provide initial starting values for parameters estimated. Observations that provide covariance values, if any are present in the ESTDATA= data set, are ignored.

The ESTDATA= data set is usually created by the OUTEST= option in a previous FIT statement. You can also create an ESTDATA= data set with a SAS DATA step program. The data set must contain a numeric variable for each parameter to be given a value or covariance column. The name of the variable in the ESTDATA= data set must match the name of the parameter in the model. Parameters with names longer than 32 characters cannot be set from an ESTDATA= data set. The data set must also contain a character variable _NAME_ of length 32. _NAME_ has a blank value for the observation that gives values to the parameters. _NAME_ contains the name of a parameter for observations that define rows of the covariance matrix.

More than one set of parameter estimates and covariances can be stored in the ESTDATA= data set if the observations for the different estimates are identified by the variable _TYPE_. _TYPE_ must be a character variable of length 8. The TYPE= option is used to select for input the part of the ESTDATA= data set for which the _TYPE_ value matches the value of the TYPE= option.

In PROC MODEL, you have several options to specify starting values for the parameters to be estimated. When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. If no options are specified for the starting value, the default value of 0.0001 is used.

The following SAS statements generate the ESTDATA= data set shown in Figure 19.64. The second FIT statement uses the TYPE= option to select the estimates from the GMM estimation as starting values for the FIML estimation.

```
/* Generate test data */
data gmm2;
  do t=1 to 50;
    x1 = sqrt(t) ;
    x2 = rannor(10) * 10;
    y1 = -.002 * x2 * x2 - .05 / x2 - 0.001 * x1 * x1;
    y2 = 0.002* y1 + 2 * x2 * x2 + 50 / x2 + 5 * rannor(1);
    y1 = y1 + 5 * rannor(1);
    z1 = 1; z2 = x1 * x1; z3 = x2 * x2; z4 = 1.0/x2;
  output;
  end;
run;

proc model data=gmm2 ;
  exogenous x1 x2;
  parms a1 a2 b1 2.5 b2 c2 55 d1;
  inst b1 b2 c2 x1 x2;
  y1 = a1 * y2 + b1 * x1 * x1 + d1;
  y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

  fit y1 y2 / 3sls gmm kernel=(qs,1,0.2) outest=gmmest;

  fit y1 y2 / fiml type=gmm estdata=gmmest;
run;

proc print data=gmmest;
run;
```

Figure 19.64 ESTDATA= Data Set

		—		S		—					
				T		N					
N T				A		U					
A Y				T		S					
O M P				U		E					
b E E				S		D		a	a	b	b
s — —				—		—		1	2	1	2
								c	c	d	d
								2	2	1	1
1	3SLS	0	Converged	50	-.002229607	-1.25002	0.025827	1.99609	49.8119	-0.44533	
2	GMM	0	Converged	50	-.001772196	-1.02345	0.014025	1.99726	49.8648	-0.87573	

MISSING=PAIRWISE | DELETE

When missing values are encountered for any one of the equations in a system of equations, the default action is to drop that observation for all of the equations. The new MISSING=PAIRWISE option in the FIT statement provides a different method of handling missing values that avoids losing data for nonmissing equations for the observation. This is especially useful for SUR estimation on equations with unequal numbers of observations.

The option MISSING=PAIRWISE specifies that missing values are tracked on an equation-by-equation basis. The MISSING=DELETE option specifies that the entire observation is omitted from the analysis when any equation has a missing predicted or actual value for the equation. The default is MISSING=DELETE.

When you specify the MISSING=PAIRWISE option, the **S** matrix is computed as

$$\mathbf{S} = \mathbf{D}(\mathbf{R}'\mathbf{R})\mathbf{D}$$

where **D** is a diagonal matrix that depends on the VARDEF= option, the matrix **R** is $(\mathbf{r}_1, \dots, \mathbf{r}_g)$, and \mathbf{r}_i is the vector of residuals for the i th equation with r_{ij} replaced with zero when r_{ij} is missing.

For MISSING=PAIRWISE, the calculation of the diagonal element $d_{i,i}$ of **D** is based on n_i , the number of nonmissing observations for the i th equation, instead of on n . Similarly, for VARDEF=WGT or WDF, the calculation is based on the sum of the weights for the nonmissing observations for the i th equation instead of on the sum of the weights for all observations. See the description of the VARDEF= option for the definition of **D**.

The degrees-of-freedom correction for a shared parameter is computed by using the average number of observations used in its estimation.

The MISSING=PAIRWISE option is not valid for the GMM and FIML estimation methods.

For the instrumental variables estimation methods (2SLS, 3SLS), when an instrument is missing for an observation, that observation is dropped for all equations, regardless of the MISSING= option.

PARMSDATA= Input Data Set

The option PARMSDATA= reads values for all parameters whose names match the names of variables in the PARMSDATA= data set. Values for any or all of the parameters in the model can be reset by using the PARMSDATA= option. The PARMSDATA= option goes in the PROC MODEL statement, and the data set is read before any FIT or SOLVE statements are executed.

In PROC MODEL, you have several options to specify starting values for the parameters to be estimated. When more than one option is specified, the options are implemented in the following order of precedence (from highest to lowest): the START= option, the PARMS statement initialization value, the ESTDATA= option, and the PARMSDATA= option. If no options are specified for the starting value, the default value of 0.0001 is used. Together, the OUTPARMS= and PARMSDATA= options enable you to change part of a model and recompile the new model program without the need to reestimate equations that were not changed.

Suppose you have a large model with parameters estimated and you now want to replace one equation, Y , with a new specification. Although the model program must be recompiled with the new equation, you don't need to reestimate all the equations, just the one that changed.

Using the OUTPARMS= and PARMSDATA= options, you could do the following:

```
proc model model=oldmod outparms=temp; run;
proc model outmodel=newmod parmsdata=temp data=in;
    ... include new model definition with changed y eq. here ...
fit y;
run;
```

The model file NEWMOD then contains the new model and its estimated parameters plus the old models with their original parameter values.

SDATA= Input Data Set

The SDATA= option allows a cross-equation covariance matrix to be input from a data set. The **S** matrix read from the SDATA= data set, specified in the FIT statement, is used to define the objective function for the OLS, N2SLS, SUR, and N3SLS estimation methods and is used as the initial **S** for the methods that iterate the **S** matrix.

Most often, the SDATA= data set has been created by the OUTS= or OUTSUSED= option in a previous FIT statement. The OUTS= and OUTSUSED= data sets from a FIT statement can be read back in by a FIT statement in the same PROC MODEL step.

You can create an input SDATA= data set by using the DATA step. PROC MODEL expects to find a character variable `_NAME_` in the SDATA= data set as well as variables for the equations in the estimation or solution. For each observation with a `_NAME_` value that matches the name of an equation, PROC MODEL fills the corresponding row of the **S** matrix with the values of the names of equations found in the data set. If a row or column is omitted from the data set, a 1 is placed on the diagonal for the row or column. Missing values are ignored, and since the **S** matrix is symmetric, you can include only a triangular part of the **S** matrix in the SDATA= data set with the omitted part indicated by missing values. If the SDATA= data set contains multiple observations with the same `_NAME_`, the last values supplied for the `_NAME_` are used. The structure of the expected data set is further described in the section “[OUTS= Data Set](#)” on page 1189.

Use the TYPE= option in the PROC MODEL or FIT statement to specify the type of estimation method used to produce the **S** matrix you want to input.

The following SAS statements are used to generate an **S** matrix from a GMM and a 3SLS estimation and to store that estimate in the data set GMMS:

```
proc model data=gmm2 ;
    exogenous x1 x2;
    parms a1 a2 b1 2.5 b2 c2 55 d1;
    inst b1 b2 c2 x1 x2;
    y1 = a1 * y2 + b1 * x1 * x1 + d1;
    y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

    fit y1 y2 / 3s1s gmm kernel=(qs,1,0.2)
                outest=gmmest outs=gmmns;
run;
```

```
proc print data=gmmms;
run;
```

The data set GMMS is shown in Figure 19.65.

Figure 19.65 SDATA= Data Set

Obs	_NAME_	_TYPE_	_NUSED_	y1	y2
1	y1	3SLS	50	27.1032	38.1599
2	y2	3SLS	50	38.1599	74.6253
3	y1	GMM	50	27.6248	32.2811
4	y2	GMM	50	32.2811	58.8387

VDATA= Input data set

The VDATA= option enables a variance matrix for GMM estimation to be input from a data set. When the VDATA= option is used in the PROC MODEL or FIT statement, the matrix that is input is used to define the objective function and is used as the initial **V** for the methods that iterate the **V** matrix.

Normally the VDATA= matrix is created from the OUTV= option in a previous FIT statement. Alternately an input VDATA= data set can be created by using the DATA step. Each row and column of the **V** matrix is associated with an equation and an instrument. The position of each element in the **V** matrix can then be indicated by an equation name and an instrument name for the row of the element and an equation name and an instrument name for the column. Each observation in the VDATA= data set is an element in the **V** matrix. The row and column of the element are indicated by four variables (EQ_ROW, INST_ROW, EQ_COL, and INST_COL) that contain the equation name or instrument name. The variable name for an element is VALUE. Missing values are set to 0. Because the variance matrix is symmetric, only a triangular part of the matrix needs to be input.

The following SAS statements are used to generate a **V** matrix estimation from GMM and to store that estimate in the data set GMMV:

```
proc model data=gmm2;
  exogenous x1 x2;
  parms a1 a2 b2 b1 2.5 c2 55 d1;
  inst b1 b2 c2 x1 x2;
  y1 = a1 * y2 + b1 * x1 * x1 + d1;
  y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

  fit y1 y2 / gmm outv=gmmv;
run;
proc print data=gmmv (obs=15);
run;
```

The data set GMM2 was generated by the example in the preceding ESTDATA= section. The **V** matrix stored in GMMV is selected for use in an additional GMM estimation by the following FIT statement:

```
fit y1 y2 / gmm vdata=gmmv;
run;
```

A partial listing of the GMMV data set is shown in Figure 19.66. There are a total of 78 observations in this data set. The **V** matrix is 12 by 12 for this example.

Figure 19.66 The First 15 Observations in the VDATA= Data Set

Obs	_TYPE_	EQ_ROW	EQ_COL	INST_ROW	INST_COL	VALUE
1	GMM	y1	y1	1	1	1555.78
2	GMM	y1	y1	x1	1	8565.80
3	GMM	y1	y1	x1	x1	49932.47
4	GMM	y1	y1	x2	1	8244.34
5	GMM	y1	y1	x2	x1	51324.21
6	GMM	y1	y1	x2	x2	159913.24
7	GMM	y1	y1	@PRED.y1/@b1	1	49933.61
8	GMM	y1	y1	@PRED.y1/@b1	x1	301270.02
9	GMM	y1	y1	@PRED.y1/@b1	x2	317277.10
10	GMM	y1	y1	@PRED.y1/@b1	@PRED.y1/@b1	1860095.90
11	GMM	y1	y1	@PRED.y2/@b2	1	163855.31
12	GMM	y1	y1	@PRED.y2/@b2	x1	900622.60
13	GMM	y1	y1	@PRED.y2/@b2	x2	1285421.56
14	GMM	y1	y1	@PRED.y2/@b2	@PRED.y1/@b1	5173744.58
15	GMM	y1	y1	@PRED.y2/@b2	@PRED.y2/@b2	30307640.16

Output Data Sets

OUT= Data Set

For normalized form equations, the OUT= data set specified in the FIT statement contains residuals, actuals, and predicted values of the dependent variables computed from the parameter estimates. For general form equations, actual values of the endogenous variables are copied for the residual and predicted values.

The variables in the data set are as follows:

- BY variables
- RANGE variable
- ID variables
- _ESTYPE_, a character variable of length 8 that identifies the estimation method: OLS, SUR, N2SLS, N3SLS, ITOLS, ITSUR, IT2SLS, IT3SLS, GMM, ITGMM, or FIML
- _TYPE_, a character variable of length 8 that identifies the type of observation: RESIDUAL, PREDICT, or ACTUAL
- _WEIGHT_, the weight of the observation in the estimation. The _WEIGHT_ value is 0 if the observation was not used. It is equal to the product of the _WEIGHT_ model program variable and the variable named in the WEIGHT statement, if any, or 1 if weights were not used.
- the WEIGHT statement variable if used

- the model variables. The dependent variables for the normalized form equations in the estimation contain residuals, actuals, or predicted values, depending on the `_TYPE_` variable, whereas the model variables that are not associated with estimated equations always contain actual values from the input data set.
- any other variables named in the `OUTVARS` statement. These can be program variables computed by the model program, `CONTROL` variables, parameters, or special variables in the model program.

The following SAS statements are used to generate and print an `OUT=` data set:

```
proc model data=gmm2;
  exogenous x1 x2;
  parms a1 a2 b1 b2 2.5 c2 55 d1;
  inst b1 b2 c2 x1 x2;
  y1 = a1 * y2 + b1 * x1 * x1 + d1;
  y2 = a2 * y1 + b2 * x2 * x2 + c2 / x2 + d1;

  fit y1 y2 / 3sls gmm out=resid outall ;
run;
proc print data=resid(obs=20);
run;
```

The data set `GMM2` was generated by the example in the preceding `ESTDATA=` section above. A partial listing of the `RESID` data set is shown in [Figure 19.67](#).

Figure 19.67 The `OUT=` Data Set

Obs	_ESTYPE_	_TYPE_	_WEIGHT_	x1	x2	y1	y2
1	3SLS	ACTUAL	1	1.00000	-1.7339	-3.05812	-23.071
2	3SLS	PREDICT	1	1.00000	-1.7339	-0.36806	-19.351
3	3SLS	RESIDUAL	1	1.00000	-1.7339	-2.69006	-3.720
4	3SLS	ACTUAL	1	1.41421	-5.3046	0.59405	43.866
5	3SLS	PREDICT	1	1.41421	-5.3046	-0.49148	45.588
6	3SLS	RESIDUAL	1	1.41421	-5.3046	1.08553	-1.722
7	3SLS	ACTUAL	1	1.73205	-5.2826	3.17651	51.563
8	3SLS	PREDICT	1	1.73205	-5.2826	-0.48281	41.857
9	3SLS	RESIDUAL	1	1.73205	-5.2826	3.65933	9.707
10	3SLS	ACTUAL	1	2.00000	-0.6878	3.66208	-70.011
11	3SLS	PREDICT	1	2.00000	-0.6878	-0.18592	-76.502
12	3SLS	RESIDUAL	1	2.00000	-0.6878	3.84800	6.491
13	3SLS	ACTUAL	1	2.23607	-7.0797	0.29210	99.177
14	3SLS	PREDICT	1	2.23607	-7.0797	-0.53732	92.201
15	3SLS	RESIDUAL	1	2.23607	-7.0797	0.82942	6.976
16	3SLS	ACTUAL	1	2.44949	14.5284	1.86898	423.634
17	3SLS	PREDICT	1	2.44949	14.5284	-1.23490	421.969
18	3SLS	RESIDUAL	1	2.44949	14.5284	3.10388	1.665
19	3SLS	ACTUAL	1	2.64575	-0.6968	-1.03003	-72.214
20	3SLS	PREDICT	1	2.64575	-0.6968	-0.10353	-69.680

OUTEST= Data Set

The OUTEST= data set contains parameter estimates and, if requested, estimates of the covariance of the parameter estimates.

The variables in the data set are as follows:

- BY variables
- `_NAME_`, a character variable of length 32, blank for observations that contain parameter estimates or a parameter name for observations that contain covariances
- `_TYPE_`, a character variable of length 8 that identifies the estimation method: OLS, SUR, N2SLS, N3SLS, ITOLS, ITSUR, IT2SLS, IT3SLS, GMM, ITGMM, or FIML
- `_STATUS_`, variable that gives the convergence status of estimation. `_STATUS_` = 0 when convergence criteria are met, = 1 when estimation converges with a note, = 2 when estimation converges with a warning, and = 3 when estimation fails to converge
- `_NUSED_`, the number of observations used in estimation
- the parameters estimated

If the COVOUT option is specified, an additional observation is written for each row of the estimate of the covariance matrix of parameter estimates, with the `_NAME_` values that contain the parameter names for the rows. Parameter names longer than 32 characters are truncated.

OUTPARMS= Data Set

The option OUTPARMS= writes all the parameter estimates to an output data set. This output data set contains one observation and is similar to the OUTEST= data set, but it contains all the parameters, is not associated with any FIT task, and contains no covariances. The OUTPARMS= option is used in the PROC MODEL statement, and the data set is written at the end, after any FIT or SOLVE steps have been performed.

OUTS= Data Set

The OUTS= SAS data set contains the estimate of the covariance matrix of the residuals across equations. This matrix is formed from the residuals that are computed by using the parameter estimates.

The variables in the OUTS= data set are as follows:

- BY variables
- `_NAME_`, a character variable that contains the name of the equation
- `_TYPE_`, a character variable of length 8 that identifies the estimation method: OLS, SUR, N2SLS, N3SLS, ITOLS, ITSUR, IT2SLS, IT3SLS, GMM, ITGMM, or FIML

- variables with the names of the equations in the estimation

Each observation contains a row of the covariance matrix. The data set is suitable for use with the `SDATA=` option in a subsequent `FIT` or `SOLVE` statement. (See the section “[Tests on Parameters](#)” on page 1156 in this chapter for an example of the `SDATA=` option.)

OUTSUSED= Data Set

The `OUTSUSED=` SAS data set contains the covariance matrix of the residuals across equations that is used to define the objective function. The form of the `OUTSUSED=` data set is the same as that for the `OUTS=` data set.

Note that `OUTSUSED=` is the same as `OUTS=` for the estimation methods that iterate the **S** matrix (ITOLS, IT2SLS, ITSUR, and IT3SLS). If the `SDATA=` option is specified in the `FIT` statement, `OUTSUSED=` is the same as the `SDATA=` matrix read in for the methods that do not iterate the **S** matrix (OLS, SUR, N2SLS, and N3SLS).

OUTV= Data Set

The `OUTV=` data set contains the estimate of the variance matrix, **V**. This matrix is formed from the instruments and the residuals that are computed by using the final parameter estimates obtained from the estimation method chosen.

An estimate of **V** obtained from 2SLS is used in GMM estimation. Hence if you input the dataset obtained from the `OUTV` statement in 2SLS into the `VDATA` statement while fitting GMM, you get the same result by fitting GMM directly without specifying the `VDATA` option.

ODS Table Names

PROC MODEL assigns a name to each table it creates. You can use these names to reference the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 19.4 ODS Tables Produced in PROC MODEL

ODS Table Name	Description	Option
ODS Tables Created by the FIT Statement		
AugGMMCovariance	Crossproducts matrix	GMM ITALL
ChowTest	Structural change test	CHOW=
CollinDiagnostics	Collinearity diagnostics	
ConfInterval	Profile likelihood confidence intervals	PRL=
ConvCrit	Convergence criteria for estimation	default

Table 19.4 (continued)

ODS Table Name	Description	Option
ConvergenceStatus	Convergence status	default
CorrB	Correlations of parameters	COVB/CORRB
CorrResiduals	Correlations of residuals	CORRS/COVS
CovB	Covariance of parameters	COVB/CORRB
CovResiduals	Covariance of residuals	CORRS/COVS
Crossproducts	Crossproducts matrix	ITALL/ITPRINT
DatasetOptions	Data sets used	default
DetResidCov	Determinant of the residuals	DETAILS
DWTest	Durbin Watson test	DW=
Equations	Listing of equations to estimate	default
EstSummaryMiss	Model summary statistics for PAIRWISE	MISSING=
EstSummaryStats	Objective, objective * N	default
FirstLagrMultEst	First order Lagrange Multiplier estimates	GMM ITALL
GMMCovariance	Crossproducts matrix	GMM DETAILS
GMMTestStats	GMM test statistics	GMM
Godfrey	Godfrey's serial correlation test	GF=
HausmanTest	Hausman's test table	HAUSMAN
HeteroTest	Heteroscedasticity test tables	BREUSCH/PAGEN
InvXPXMat	X'X inverse for system	I
IterInfo	Iteration printing	ITALL/ITPRINT
LagLength	Model lag length	default
MinSummary	Number of parameters, estimation kind	default
ModSummary	Listing of all categorized variables	default
ModVars	Listing of model variables and parameters	default
NormalityTest	Normality test table	NORMAL
ObsSummary	Identifies observations with errors	default
ObsUsed	Observations read, used, and missing.	default
ParameterEstimates	Parameter estimates	default
ParmChange	Parameter change vector	ITALL
ResidSummary	Summary of the SSE, MSE for the equations	default
SecondLagrMultEst	Second order Lagrange Multiplier estimates	GMM ITALL
SizeInfo	Storage requirement for estimation	DETAILS
TermEstimates	Nonlinear OLS and ITOLS Estimates	OLS/ITOLS
TestResults	Test statement table	
WgtVar	The name of the weight variable	
XPXMat	X'X for system	XPX
YkVector	Marquardt iteration vector	GMM ITALL

ODS Tables Created by the SOLVE Statement

DatasetOptions	Data sets used	default
DescriptiveStatistics	Descriptive statistics	STATS
FitStatistics	Fit statistics for simulation	STATS
LagLength	Model lag length	default
ModSummary	Listing of all categorized variables	default

Table 19.4 (continued)

ODS Table Name	Description	Option
ObsSummary	Simulation trace output	SOLVEPRINT
ObsUsed	Observations read, used, and missing.	default
SimulationSummary	Number of variables solved for	default
SolutionVarList	Solution variable lists	default
TheilRelStats	Theil relative change error statistics	THEIL
TheilStats	Theil forecast error statistics	THEIL
ErrorVec	Iteration Error vector	ITPRINT
ResidualValues	Iteration residual values	ITPRINT
PredictedValues	Iteration predicted values	ITPRINT
SolutionValues	Iteration solved for variable values	ITPRINT

ODS Tables Created by the FIT and SOLVE Statements

AdjacencyMatrix	Adjacency graph	GRAPH
BlockAnalysis	Block analysis	BLOCK
BlockStructure	Block structure	BLOCK
CodeDependency	Variable cross reference	LISTDEP
CodeList	Listing of programs statements	LISTCODE
CrossReference	Cross-reference listing for program	
DepStructure	Dependency structure of the system	BLOCK
FirstDerivatives	First derivative table	LISTDER
IterIntg	Integration iteration output	INTGPRINT
MemUsage	Memory usage statistics	MEMORYUSE
ParmReadIn	Parameter estimates read in	ESTDATA=
ProgList	Listing of compiled program code	
RangeInfo	RANGE statement specification	
SortAdjacencyMatrix	Sorted adjacency graph	GRAPH
TransitiveClosure	Transitive closure graph	GRAPH

The AugGMMCovariance table is the **V** matrix augmented with the moment vector at iteration zero, produced when the ITALL option is used with the GMM option. If the **V** matrix to be used in GMM is read in by the VDATA option, then AugGMMCovariance would be the same matrix augmented with the moment vectors. The GMMCovariance ODS output is produced only when you read in a covariance matrix to be used in the GMM method. This table is produced by using DETAILS option with the GMM option.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the MODEL procedure.

ODS Graph Names

PROC MODEL assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when you use ODS. The names are listed in [Table 19.5](#).

To request these graphs, ODS Graphics must be enabled.

Table 19.5 ODS Graphics Produced by PROC MODEL

ODS Graph Name	Plot Description
ACFPlot	Autocorrelation of residuals
ActualByPredicted	Predicted versus actual plot
CooksD	Cook’s D plot
DiagnosticsPanel	Panel of all plots
IACFPlot	Inverse autocorrelation of residuals
QQPlot	Q-Q plot of residuals
PACFPlot	Partial autocorrelation of residuals
ResidualHistogram	Histogram of the residuals
StudentResidualPlot	Studentized residual plot

Details: Simulation by the MODEL Procedure

The *solution*, given the vector \mathbf{k} , of the following nonlinear system of equations is the vector \mathbf{u} that satisfies this equation:

$$\mathbf{q}(\mathbf{u}, \mathbf{k}, \boldsymbol{\theta}) = 0$$

A *simulation* is a set of solutions \mathbf{u}_t for a specific sequence of vectors \mathbf{k}_t .

Model simulation can be performed to do the following:

- check how well the model predicts the actual values over the historical period
- investigate the sensitivity of the solution to changes in the input values or parameters
- examine the dynamic characteristics of the model
- check the stability of the simultaneous solution

- estimate the statistical distribution of the predicted values of the nonlinear model using Monte Carlo methods

By combining the various solution modes with different input data sets, model simulation can answer many different questions about the model. This section presents details of model simulation and solution.

Solution Modes

The following solution modes are commonly used:

- The *dynamic simultaneous forecast* mode is used for forecasting with the model. Collect the historical data on the model variables, the future assumptions of the exogenous variables, and any prior information on the future endogenous values, and combine them in a SAS data set. Use the FORECAST option in the SOLVE statement.
- The *dynamic simultaneous simulation* mode is often called *ex post simulation*, *historical simulation*, or *ex post forecasting*. Use the DYNAMIC option. This mode is the default.
- The *static simultaneous simulation* mode can be used to examine the within-period performance of the model without the complications of previous period errors. Use the STATIC option.
- The *NAHEAD=n dynamic simultaneous simulation* mode can be used to see how well *n*-period-ahead forecasting would have performed over the historical period. Use the NAHEAD=*n* option.

The different solution modes are explained in detail in the following sections.

Dynamic and Static Simulations

In model simulation, either solved values or actual values from the data set can be used to supply lagged values of an endogenous variable. A *dynamic* solution refers to a solution obtained by using only solved values for the lagged values. Dynamic mode is used both for forecasting and for simulating the dynamic properties of the model.

A *static* solution refers to a solution obtained by using the actual values when available for the lagged endogenous values. Static mode is used to simulate the behavior of the model without the complication of previous period errors. Dynamic simulation is the default.

If you want to use static values for lags only for the first *n* observations, and dynamic values thereafter, specify the START=*n* option. For example, if you want a dynamic simulation to start after observation twenty-four, specify START=24 on the SOLVE statement. If the model being simulated had a value lagged for four time periods, then this value would start using dynamic values when the simulation reached observation number 28.

***n*-Period-Ahead Forecasting**

Suppose you want to regularly forecast 12 months ahead and produce a new forecast each month as more data becomes available. *n*-period-ahead forecasting allows you to test how well you would have done over time if you had been using your model to forecast one year ahead.

To see how well a model predicts *n* time periods in the future, perform an *n*-period-ahead forecast on real data and compare the forecast values with the actual values.

n-period-ahead forecasting refers to using dynamic values for the lagged endogenous variables only for lags 1 through *n*–1. For example, one-period-ahead forecasting, specified by the NAHEAD=1 option in the SOLVE statement, is the same as if a static solution had been requested. Specifying NAHEAD=2 produces a solution that uses dynamic values for lag one and static, actual, values for longer lags.

The following example is a two-year-ahead dynamic simulation. The output is shown in [Figure 19.68](#).

```
data yearly;
  input year x1 x2 x3 y1 y2 y3;
  datalines;
84 4 9 0 7 4 5
85 5 6 1 1 27 4
86 3 8 2 5 8 2
87 2 10 3 0 10 10
88 4 7 6 20 60 40
89 5 4 8 40 40 40
90 3 2 10 50 60 60
91 2 5 11 40 50 60
;
run;

proc model data=yearly outmodel=yearlyModel;
  endogenous y1 y2 y3;
  exogenous x1 x2 x3;

  y1 = 2 + 3*x1 - 2*x2 + 4*x3;
  y2 = 4 + lag2( y3 ) + 2*y1 + x1;
  y3 = lag3( y1 ) + y2 - x2;

  solve y1 y2 y3 / nahead=2 out=c;
run;

proc print data=c;
run;
```

Figure 19.68 NAHEAD Summary Report

The MODEL Procedure	
Dynamic Simultaneous 2-Periods-Ahead Forecasting Simulation	
Data Set Options	
DATA=	YEARLY
OUT=	C

Figure 19.68 *continued*

Solution Summary	
Variables Solved	3
Simulation Lag Length	3
Solution Method	NEWTON
CONVERGE=	1E-8
Maximum CC	0
Maximum Iterations	1
Total Iterations	8
Average Iterations	1
Observations Processed	
Read	20
Lagged	12
Solved	8
First	5
Last	8
Variables Solved For	y1 y2 y3

The C data set is shown in [Figure 19.69](#):

Figure 19.69 C Data Set

Obs	_TYPE_	_MODE_	_LAG_	_ERRORS_	y1	y2	y3	x1	x2	x3
1	PREDICT	SIMULATE	0	0	0	10	7	2	10	3
2	PREDICT	SIMULATE	1	0	24	58	52	4	7	6
3	PREDICT	SIMULATE	1	0	41	101	102	5	4	8
4	PREDICT	SIMULATE	1	0	47	141	139	3	2	10
5	PREDICT	SIMULATE	1	0	42	130	145	2	5	11

The preceding two-year-ahead simulation can be emulated without using the NAHEAD= option by the following PROC MODEL statements:

```
proc model data=yearly model=yearlyModel;
  range year = 87 to 88;
  solve y1 y2 y3 / dynamic solveprint;
run;

  range year = 88 to 89;
  solve y1 y2 y3 / dynamic solveprint;
run;

  range year = 89 to 90;
  solve y1 y2 y3 / dynamic solveprint;
run;

  range year = 90 to 91;
  solve y1 y2 y3 / dynamic solveprint;
```

The totals shown under “Observations Processed” in Figure 19.68 are equal to the sum of the four individual runs.

Simulation and Forecasting

You can perform a simulation of your model or use the model to produce forecasts. *Simulation* refers to the determination of the endogenous or dependent variables as a function of the input values of the other variables, even when actual data for some of the solution variables are available in the input data set. The simulation mode is useful for verifying the fit of the model parameters. Simulation is selected by the SIMULATE option in the SOLVE statement. Simulation mode is the default.

In forecast mode, PROC MODEL solves only for those endogenous variables that are missing in the data set. The actual value of an endogenous variable is used as the solution value whenever nonmissing data for it is available in the input data set. Forecasting is selected by the FORECAST option in the SOLVE statement.

For example, an econometric forecasting model can contain an equation to predict future tax rates, but tax rates are usually set in advance by law. Thus, for the first year or so of the forecast, the predicted tax rate should really be exogenous. Or, you might want to use a prior forecast of a certain variable from a short-run forecasting model to provide the predicted values for the earlier periods of a longer-range forecast of a long-run model. A common situation in forecasting is when historical data needed to fill the initial lags of a dynamic model are available for some of the variables but have not yet been obtained for others. In this case, the forecast must start in the past to supply the missing initial lags. Clearly, you should use the actual data that are available for the lags. In all the preceding cases, the forecast should be produced by running the model in the FORECAST mode; simulating the model over the future periods would not be appropriate.

Monte Carlo Simulation

The accuracy of the forecasts produced by PROC MODEL depends on four sources of error (Pindyck and Rubinfeld 1981, 405–406):

- The system of equations contains an implicit random error term ϵ

$$\mathbf{g}(\mathbf{y}, \mathbf{x}, \hat{\boldsymbol{\theta}}) = \boldsymbol{\epsilon}$$

where \mathbf{y} , \mathbf{x} , \mathbf{g} , $\hat{\boldsymbol{\theta}}$, and $\boldsymbol{\epsilon}$ are vector valued.

- The estimated values of the parameters, $\hat{\boldsymbol{\theta}}$, are themselves random variables.
- The exogenous variables might have been forecast themselves and therefore might contain errors.
- The system of equations might be incorrectly specified; the model only approximates the process modeled.

The RANDOM= option is used to request Monte Carlo (or stochastic) simulations to generate confidence intervals for errors that arise from the first two sources. The Monte Carlo simulations can be performed with $\boldsymbol{\epsilon}$, $\boldsymbol{\theta}$, or both vectors represented as random variables. The SEED= option is used to control the random

number generator for the simulations. SEED=0 forces the random number generator to use the system clock as its seed value.

In Monte Carlo simulations, repeated simulations are performed on the model for random perturbations of the parameters and the additive error term. The random perturbations follow a multivariate normal distribution with expected value of 0 and covariance described by a covariance matrix of the parameter estimates in the case of θ , or a covariance matrix of the equation residuals for the case of ϵ . PROC MODEL can generate both covariance matrices or you can provide them.

The ESTDATA= option specifies a data set that contains an estimate of the covariance matrix of the parameter estimates to use for computing perturbations of the parameters. The ESTDATA= data set is usually created by the FIT statement with the OUTEST= and OUTCOV options. When the ESTDATA= option is specified, the matrix read from the ESTDATA= data set is used to compute vectors of random shocks or perturbations for the parameters. These random perturbations are computed at the start of each repetition of the solution and added to the parameter values. The perturbed parameters are fixed throughout the solution range. If the covariance matrix of the parameter estimates is not provided, the parameters are not perturbed.

The SDATA= option specifies a data set that contains the covariance matrix of the residuals to use for computing perturbations of the equations. The SDATA= data set is usually created by the FIT statement with the OUTS= option. When SDATA= is specified, the matrix read from the SDATA= data set is used to compute vectors of random shocks or perturbations for the equations. These random perturbations are computed at each observation. The simultaneous solution satisfies the model equations plus the random shocks. That is, the solution is not a perturbation of a simultaneous solution of the structural equations; rather, it is a simultaneous solution of the stochastic equations by using the simulated errors. If the SDATA= option is not specified, the random shocks are not used.

The different random solutions are identified by the _REP_ variable in the OUT= data set. An unperturbed solution with _REP_=0 is also computed when the RANDOM= option is used. RANDOM= n produces $n + 1$ solution observations for each input observation in the solution range. If the RANDOM= option is not specified, the SDATA= and ESTDATA= options are ignored, and no Monte Carlo simulation is performed.

PROC MODEL does not have an automatic way of modeling the exogenous variables as random variables for Monte Carlo simulation. If the exogenous variables have been forecast, the error bounds for these variables should be included in the error bounds generated for the endogenous variables. If the models for the exogenous variables are included in PROC MODEL, then the error bounds created from a Monte Carlo simulation contain the uncertainty due to the exogenous variables.

Alternatively, if the distribution of the exogenous variables is known, the built-in random number generator functions can be used to perturb these variables appropriately for the Monte Carlo simulation. For example, if you know the forecast of an exogenous variable, X, has a standard error of 5.2 and the error is normally distributed, then the following statements can be used to generate random values for X:

```
x_new = x + 5.2 * rannor(456);
```

During a Monte Carlo simulation, the random number generator functions produce one value at each observation. It is important to use a different seed value for all the random number generator functions in the model program; otherwise, the perturbations will be correlated. For the unperturbed solution, _REP_=0, the random number generator functions return 0.

PROC UNIVARIATE can be used to create confidence intervals for the simulation (see the Monte Carlo simulation example in the section “[Getting Started: MODEL Procedure](#)” on page 1029).

Multivariate t Distribution Simulation

To perform a Monte Carlo analysis of models that have residuals distributed as a multivariate t , use the ERRORMODEL statement with either the $\sim t(\text{variance}, df)$ option or with the CDF= $t(\text{variance}, df)$ option. The CDF= option specifies the distribution that is used for simulation so that the estimation can be done for one set of distributional assumptions and the simulation for another.

The following is an example of estimating and simulating a system of equations with t distributed errors by using the ERRORMODEL statement.

```
/* generate simulation data set */
data five;
  set xfrate end=last;
  if last then do;
    todate = date +5;
    do date = date to todate;
      output;
    end;
  end;
run;
```

The preceding DATA step generates the data set to request a five-days-ahead forecast. The following statements estimate and forecast the three forward-rate models of the following form.

$$\begin{aligned} rate_t &= rate_{t-1} + \mu * rate_{t-1} + v \\ v &= \sigma * rate_{t-1} * \epsilon \\ \epsilon &\sim N(0, 1) \end{aligned}$$

```
title "Daily Multivariate Geometric Brownian Motion Model "
      "of D-Mark/USDollar Forward Rates";
```

```
proc model data=xfrate;

  parms df 15;          /* Give initial value to df */

  demusd1m = lag(demusd1m) + mu1m * lag(demusd1m);
  var_demusd1m = sigma1m ** 2 * lag(demusd1m **2);
  demusd3m = lag(demusd3m) + mu3m * lag(demusd3m);
  var_demusd3m = sigma3m ** 2 * lag(demusd3m ** 2);
  demusd6m = lag(demusd6m) + mu6m * lag(demusd6m);
  var_demusd6m = sigma6m ** 2 * lag(demusd6m ** 2);

  /* Specify the error distribution */
  errormodel demusd1m demusd3m demusd6m
    ~ t( var_demusd1m var_demusd3m var_demusd6m, df );
```

```

        /* output normalized S matrix */
        fit demusd1m demusd3m demusd6m / outsn=s;
run;

        /* forecast five days in advance */
        solve demusd1m demusd3m demusd6m /
            data=five sdata=s random=1500 out=monte;
        id date;
run;

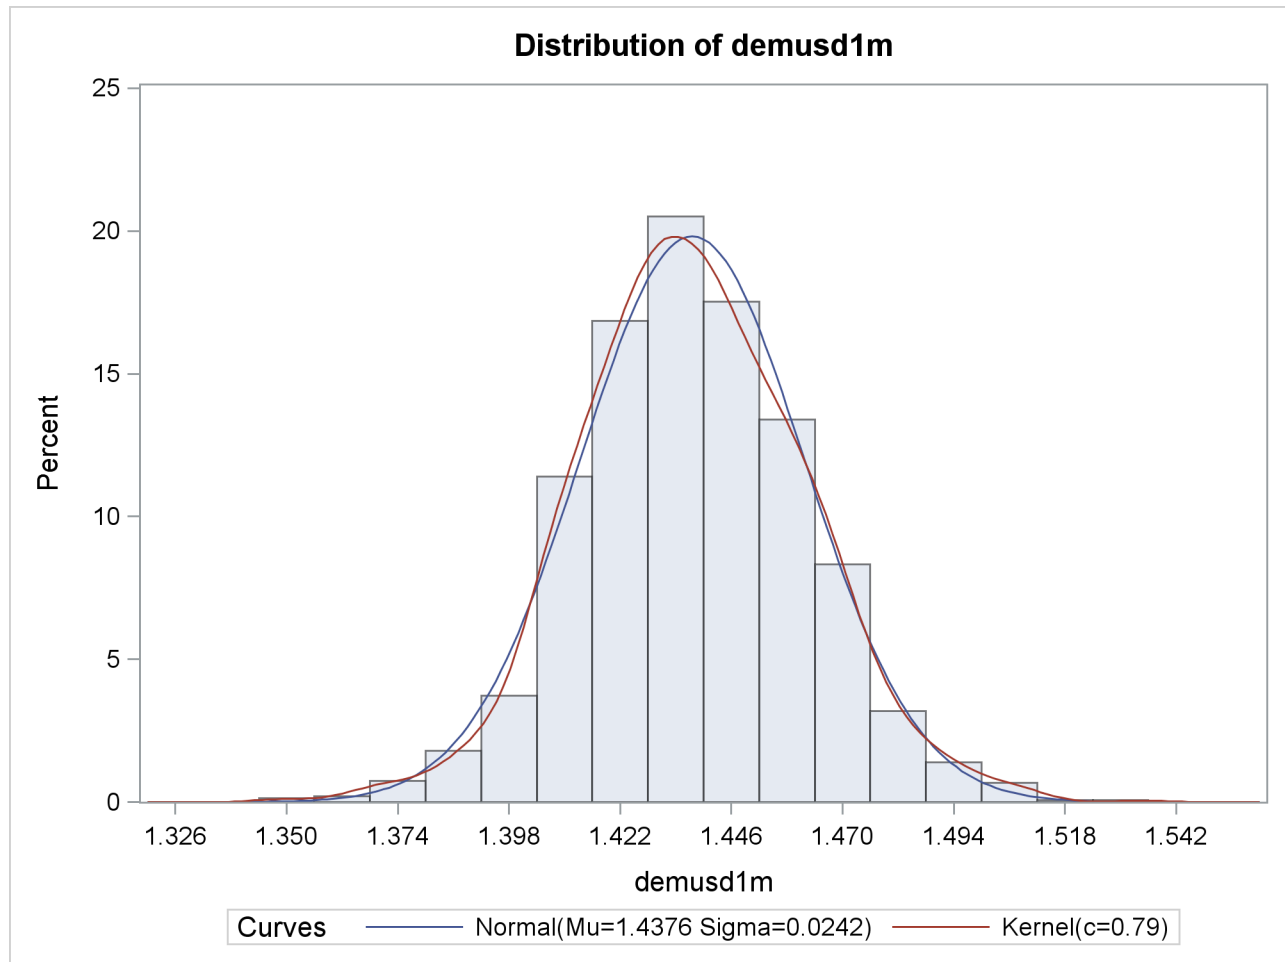
        /* select out the last date ---*/
        data monte; set monte;
        if date = '10dec95'd then output;
run;

title "Distribution of demusd1m Five Days Ahead";
proc univariate data=monte noprint;
    var demusd1m;
    histogram demusd1m /
        normal(noprint color=red)
        kernel(noprint color=blue) cfill=ligr;
run;

```

The Monte Carlo simulation specified in the preceding example draws from a multivariate t distribution with constant degrees of freedom and forecasted variance, and it computes future states of DEMUSD1M, DEMUSD3M, and DEMUSD6M. The OUTSN= option in the FIT statement is used to specify the data set for the normalized Σ matrix. That is, the Σ matrix is created by crossing the normally distributed residuals. The normally distributed residuals are created from the t distributed residuals by using the normal inverse CDF and the t CDF. This matrix is a correlation matrix.

The distribution of DEMUSD1M on the fifth day is shown in the [Figure 19.70](#). The two curves overlaid on the graph are a kernel density estimation and a normal distribution fit to the results.

Figure 19.70 Distribution of DEMUSD1M

Alternate Distribution Simulation

As an alternate to the normal distribution, the `ERRORMODEL` statement can be used in a simulation to specify other distributions. The distributions available for simulation are Cauchy, chi-squared, F , Poisson, t , and uniform. An empirical distribution can also be used if the residuals are specified by using the `RESIDDATA=` option in the `SOLVE` statement.

Except for the t distribution, all of these alternate distributions are univariate but can be used together in a multivariate simulation. The `ERRORMODEL` statement applies to solved for equations only. That is, the normal form or general form equation referred to by the `ERRORMODEL` statement must be one of the equations you have selected in the `SOLVE` statement.

In the following example, two Poisson distributed variables are used to simulate the calls that arrive at and leave a call center.

```
data s;      /* Covariance between arriving and leaving */
  arriving = 1; leaving = 0.7; _name_ = "arriving";
```

```

    output;
    arriving = 0.7; leaving = 1.0; _name_ = "leaving";
    output;
run;

data calls;
    date = '20mar2001'd;
    output;
run;

```

The first DATA step generates a data set that contains a covariance matrix for the ARRIVING and LEAVING variables. The covariance is

$$\begin{vmatrix} 1 & .7 \\ .7 & 1 \end{vmatrix}$$

The following statements create the number of waiting clients data:

```

proc model data=calls;
    arriving = 0;
    errormodel arriving ~ poisson( 10 );
    leaving = 4;
    errormodel leaving ~ poisson( 11 );

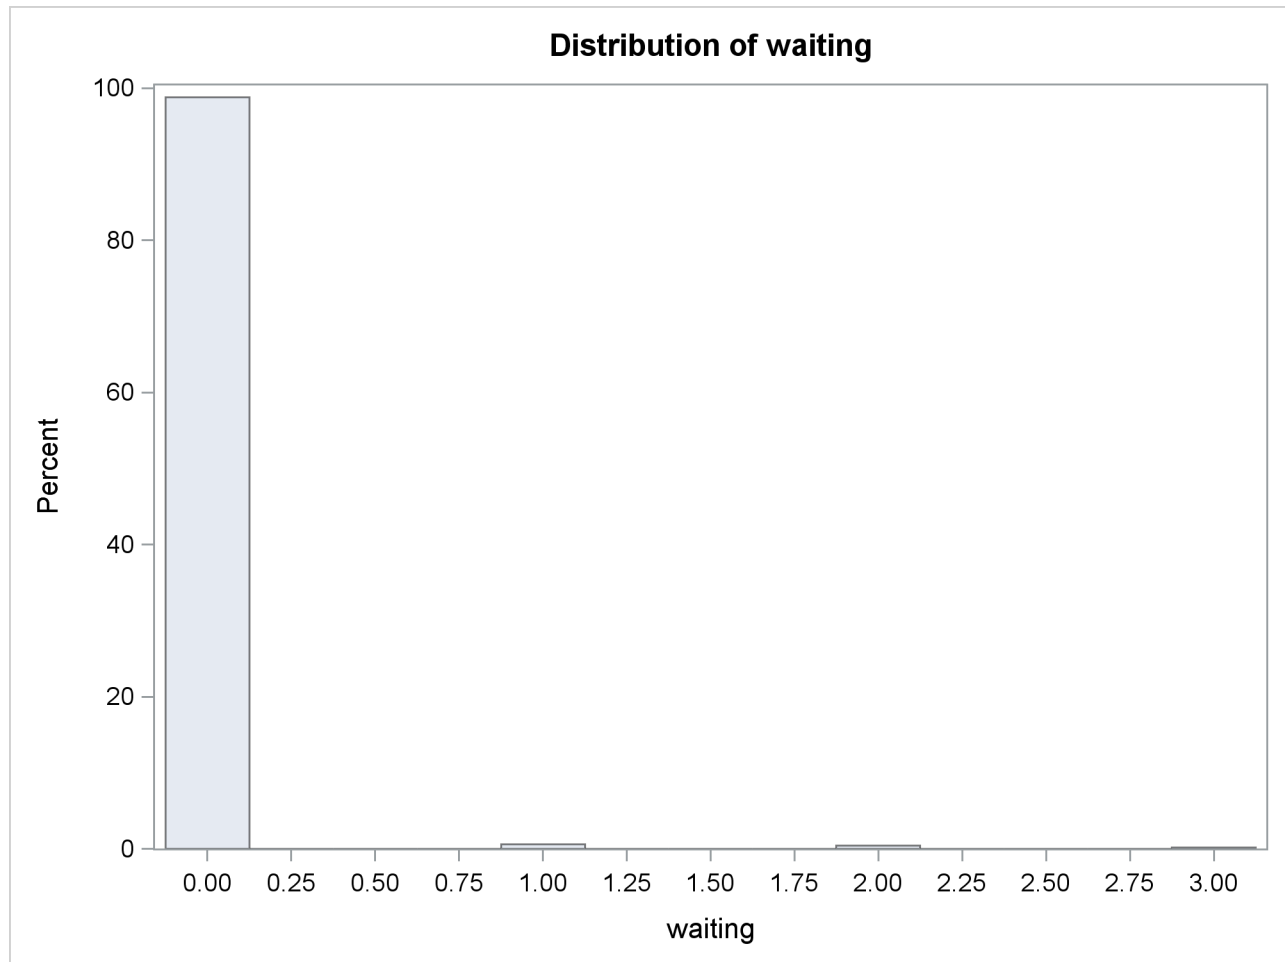
    waiting = arriving - leaving;
    if waiting < 0 then waiting=0;
    outvars waiting;

    solve arriving leaving / random=500 sdata=s out=sim;
run;

title "Distribution of Clients Waiting";
proc univariate data=sim noprint;
    var waiting ;
    histogram waiting / cfill=ligr;
run;

```

The distribution of number of waiting clients is shown in [Figure 19.71](#).

Figure 19.71 Distribution of Number of Clients Waiting

Mixtures of Distributions—Copulas

The theory of copulas is what enables the MODEL procedure to combine and simulate multivariate distributions with different marginals. This section provides a brief overview of copulas.

Modeling a system of variables accurately is a difficult task. The underlying, ideal, distributional assumptions for each variable are usually different from each other. An individual variable might be best modeled as a t distribution or as a Poisson process. The correlation of the various variables are very important to estimate as well. A joint estimation of a set of variables would make it possible to estimate a correlation structure but would restrict the modeling to single, simple multivariate distribution (for example, the normal). Even with a simple multivariate distribution, the joint estimation would be computationally difficult and would have to deal with issues of missing data.

By using the MODEL procedure ERRORMODEL statement, you can combine and simulate from models of different distributions. The covariance matrix for the combined model is constructed by using the copula induced by the multivariate normal distribution. A copula is a function that couples joint distributions to their marginal distributions.

By default, the copula used in the MODEL procedure is based on the multivariate normal. This particular multivariate normal has zero mean and covariance matrix \mathbf{R} . The user provides \mathbf{R} , which can be created by using the following steps:

1. Each model is estimated separately and their residuals are saved.
2. The residuals for each model are converted to a normal distribution by using their CDFs, $F_i(\cdot)$, using the relationship $\Phi^{-1}(F(\epsilon_{it}))$.
3. These normal residuals are crossed to create a covariance matrix \mathbf{R} .

If the model of interest can be estimated jointly, such as multivariate T, then the OUTSN= option can be used to generate the correct covariance matrix.

A draw from this mixture of distributions is created by using the following steps that are performed automatically by the MODEL procedure.

1. Independent $N(0, 1)$ variables are generated.
2. These variables are transformed to a correlated set by using the covariance matrix \mathbf{R} .
3. These correlated normals are transformed to a uniform by using $\Phi(\cdot)$.
4. $F^{-1}(\cdot)$ is used to compute the final sample value.

Alternate Copulas

The Gaussian, t , and the normal mixture copula are available in the MODEL procedure. These copulas support asymmetric parameters and can use alternate estimation methods for creating the base covariance matrix.

The normal (Gaussian) copula is the default. A draw from a Gaussian copula is obtained from

$$\mathbf{x} = \mathbf{A}\mathbf{z}$$

where $\mathbf{z} \in R^d$ is a vector of independent random normal(0, 1) draws, $\mathbf{A} \in R^{d \times d}$ is the square root of the covariance matrix, \mathbf{R} . For the normal mixture and t copula, a draw is created as

$$\mathbf{x} = w\boldsymbol{\gamma} + \sqrt{w}\mathbf{A}\mathbf{z}$$

where w is a scalar random variable and $\boldsymbol{\gamma} \in R^d$ is a vector of asymmetry parameters. $\boldsymbol{\gamma}$ is specified in the SDATA= data set. If $W \sim \text{inverse gamma}(df/2, df/2)$, then \mathbf{x} is multivariate t or skewed t if $\boldsymbol{\gamma}$ is provided. When NORMALMIX is specified, w is distributed as a step function with each of the n positive variances, $v_1 \dots v_n$, having probability $p_1 \dots p_n$.

The covariance matrix $\mathbf{R} = \mathbf{A}'\mathbf{A}$ is specified with the SDATA= option. The vector of asymmetry parameters, $\boldsymbol{\gamma}$, defaults to zero or is specified in the SDATA= data set with _TYPE_=ASYM. The ASYM option specifies that the nonzero asymmetry vector, $\boldsymbol{\gamma}$, is to be used.

The actual draw for an individual variable, y_i , depends on the marginal distribution of the variable, \tilde{F} , and the chosen copula F as

$$y_i = \tilde{F}_i^{-1}(F(x_i))$$

Asymmetrical Copula Example

In this example, an asymmetrical t copula is used to correlate two uniform distributions. The asymmetrical parameter is varied over a range of values to demonstrate its effect. The resulting graphs is produced by using ODS graphics.

```
data histdata;
  do asym = -1.3 to 1.1 by .3;
    date='01aug2007'd;
    y = .5;
    z = .5;
    output;
  end;
run ;

/* Add the asymmetric parameter to cov mat */
data asym;
  do asym = -1.3 to 1.1 by .3;
    y = asym;
    z = 0;
    _name_ = "      ";
    _type_ = "asym";
    output;
    y = 1;
    z = .65;
    _name_ = "y";
    _type_ = "cov";
    output;
    y = .65;
    z = 1;
    _name_ = "z";
    _type_ = "cov";
    output;
  end;
run;

proc model out=sim(where=( _REP_ > 0 )) data=histdata sdata=asym;
  y = 0;
  errormodel y ~ Uniform(0,1);

  z = 0;
  errormodel z ~ Uniform(0,1);

  solve y z / random=500 seed=12345 copula=(t(5) asym );
  by asym;
run;
```

To produce a panel plot of this joint distribution, use the following SAS/GRAPH statements.

```
ods graphics on / height=800 width=800;
proc template;
  define statgraph myplot.panel;
    BeginGraph;
```

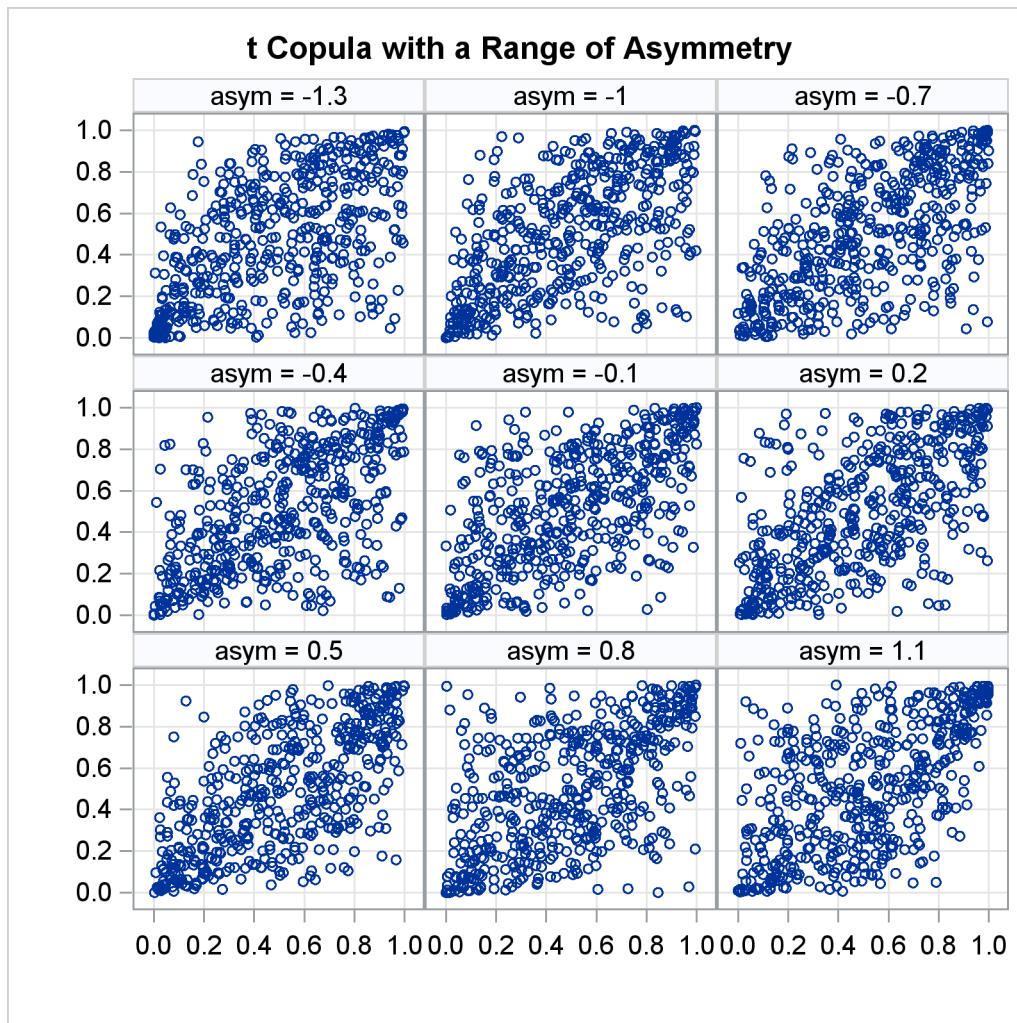
```

entrytitle halign=left halign=center
      textattrs=GRAPHTITLETEXT "t Copula with a Range of Asymmetry";

layout datapanel classvars=(asym) / rows=3 columns=3
      order=rowmajor height=1024 width=1420
      rowaxisopts=(griddisplay=on label=' ')
      columnaxisopts=(griddisplay=on label=' ');
      layout prototype;
      scatterplot x=z y=y ;
      endlayout;
endlayout;
EndGraph;
end;
run;

proc sgrender data=sim template='myplot.panel';
run;

```

Figure 19.72 *t* Copula with Asymmetry

Quasi-Random Number Generators

Traditionally high-discrepancy pseudo-random number generators are used to generate innovations in Monte Carlo simulations. Loosely translated, a high-discrepancy pseudo-random number generator is one in which there is very little correlation between the current number generated and the past numbers generated. This property is ideal if indeed independence of the innovations is required. If, on the other hand, the efficient spanning of a multidimensional space is desired, a low discrepancy, quasi-random number generator can be used. A quasi-random number generator produces numbers that have no random component.

A simple one-dimensional quasi-random sequence is the van der Corput sequence. Given a prime number r ($r \geq 2$), any integer has a unique representation in terms of base r . A number in the interval $[0,1)$ can be created by inverting the representation base power by base power. For example, consider $r=3$ and $n=1$, 1 in base 3 is

$$1_{10} = 1 \cdot 3^0 = 1_3$$

When the powers of 3 are inverted,

$$\phi(1) = \frac{1}{3}$$

Also, 11 in base 3 is

$$11_{10} = 1 \cdot 3^2 + 2 \cdot 3^0 = 10_3$$

When the powers of 3 are inverted,

$$\phi(11) = \frac{1}{9} + 2 \cdot \frac{1}{3} = \frac{7}{9}$$

The first 10 numbers in this sequence $\phi(1) \dots \phi(10)$ are provided below

$$0, \frac{1}{3}, \frac{2}{3}, \frac{1}{9}, \frac{4}{9}, \frac{7}{9}, \frac{2}{9}, \frac{5}{9}, \frac{8}{9}, \frac{1}{27}$$

As the sequence proceeds, it fills in the gaps in a uniform fashion.

Several authors have expanded this idea to many dimensions. Two versions supported by the MODEL procedure are the Sobol sequence (QUASI=SOBOL) and the Faure sequence (QUASI=FAURE). The Sobol sequence is based on binary numbers and is generally computationally faster than the Faure sequence. The Faure sequence uses the dimensionality of the problem to determine the number base to use to generate the sequence. The Faure sequence has better distributional properties than the Sobol sequence for dimensions greater than 8.

As an example of the difference between a pseudo-random number and a quasi-random number, consider simulating a bivariate normal with 100 draws.

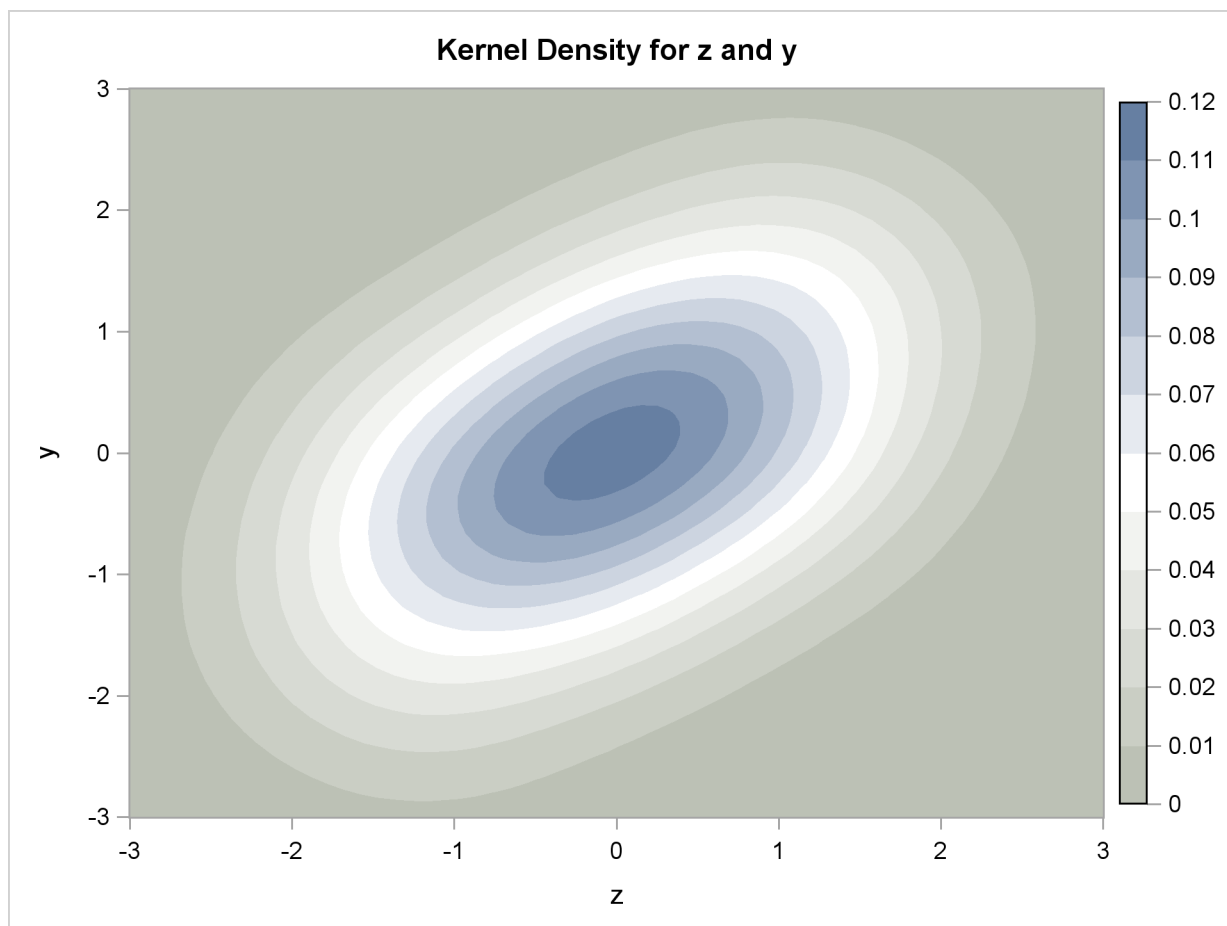
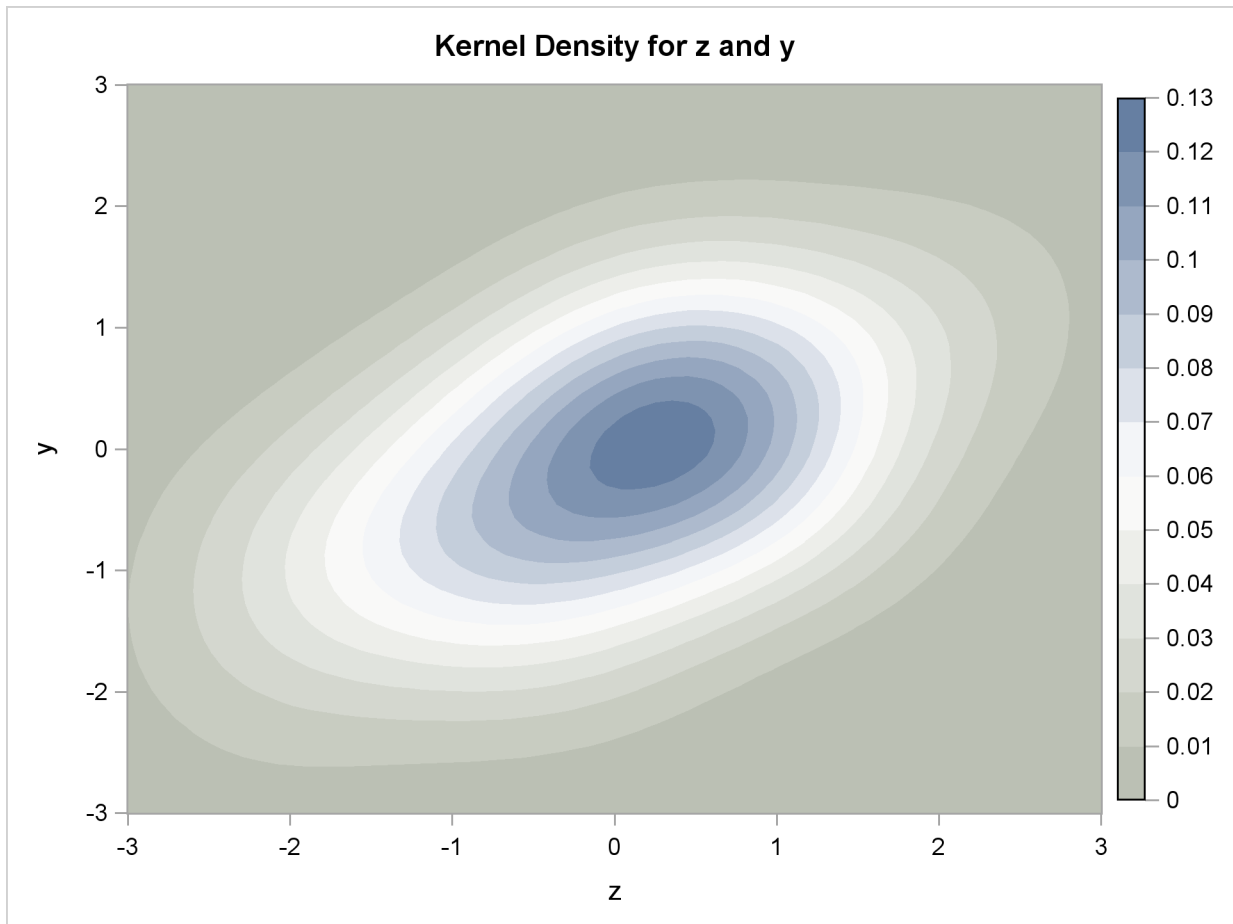
Figure 19.73 Kernel Density of a Bivariate Normal produced by 100 Faure-Random Draws

Figure 19.74 Kernel Density of a Bivariate Normal produced by 100 Pseudo-Random Draws

Solution Mode Output

The following SAS statements dynamically forecast the solution to a nonlinear equation:

```
proc model data=sashelp.citimon;
  parameters a 0.010708 b -0.478849 c 0.929304;
  lhur = 1/(a * ip) + b + c * lag(lhur);
  solve lhur / out=sim forecast dynamic;
run;
```

The first page of output produced by the SOLVE step is shown in [Figure 19.75](#). This is the summary description of the model. The error message states that the simulation was aborted at observation 144 because of missing input values.

Figure 19.75 Solve Step Summary Output

```

                                The MODEL Procedure

                                Model Summary

                                Model Variables      1
                                Parameters            3
                                Equations             1
                                Number of Statements  1
                                Program Lag Length    1

                                Model Variables  LHUR
                                Parameters(Value) a(0.010708) b(-0.478849) c(0.929304)
                                Equations      LHUR

```

The second page of output, shown in [Figure 19.76](#), gives more information on the failed observation.

Figure 19.76 Solve Step Error Message

```

                                The MODEL Procedure
                                Dynamic Single-Equation Forecast

ERROR: Solution values are missing because of missing input values for
      observation 144 at NEWTON iteration 0.
NOTE: Additional information on the values of the variables at this
      observation, which may be helpful in determining the cause of the failure
      of the solution process, is printed below.

      Observation      144      Iteration      0      CC      -1.000000
                        Missing      1

Iteration Errors - Missing.

                                The MODEL Procedure
                                Dynamic Single-Equation Forecast

                                --- Listing of Program Data Vector ---
_N_:      144      ACTUAL.LHUR:      .      ERROR.LHUR:      .
IP:      .      LHUR:      7.10000      PRED.LHUR:      .
a:      0.01071      b:      -0.47885      c:      0.92930

NOTE: Simulation aborted.

```

From the program data vector, you can see the variable IP is missing for observation 144. LHUR could not be computed, so the simulation aborted.

The solution summary table is shown in [Figure 19.77](#).

Figure 19.77 Solution Summary Report

The MODEL Procedure	
Dynamic Single-Equation Forecast	
Data Set Options	
DATA=	SASHELP.CITIMON
OUT=	SIM
Solution Summary	
Variables Solved	1
Forecast Lag Length	1
Solution Method	NEWTON
CONVERGE=	1E-8
Maximum CC	0
Maximum Iterations	1
Total Iterations	143
Average Iterations	1
Observations Processed	
Read	145
Lagged	1
Solved	143
First	2
Last	145
Failed	1
Variables Solved For	LHUR

This solution summary table includes the names of the input data set and the output data set followed by a description of the model. The table also indicates that the solution method defaulted to Newton's method. The remaining output is defined as follows.

Maximum CC	is the maximum convergence value accepted by the Newton procedure. This number is always less than the value for the CONVERGE= option.
Maximum Iterations	is the maximum number of Newton iterations performed at each observation and each replication of Monte Carlo simulations.
Total Iterations	is the sum of the number of iterations required for each observation and each Monte Carlo simulation.
Average Iterations	is the average number of Newton iterations required to solve the system at each step.
Solved	is the number of observations used times the number of random replications selected plus one, for Monte Carlo simulations. The one additional simulation is the original unperturbed solution. For simulations that do not involve Monte Carlo, this number is the number of observations used.

Summary Statistics

The STATS and THEIL options are used to select goodness-of-fit statistics. Actual values must be provided in the input data set for these statistics to be printed. When the RANDOM= option is specified, the statistics do not include the unperturbed (_REP_=0) solution.

STATS Option Output

The following statements show the addition of the STATS and THEIL options to the model in the previous section:

```
proc model data=sashelp.citimon;
  parameters a 0.010708 b -0.478849 c 0.929304;
  lhur= 1/(a * ip) + b + c * lag(lhur) ;
  solve lhur / out=sim dynamic stats theil;
  range date to '01nov91'd;
run;
```

The STATS output in Figure 19.78 and the THEIL output in Figure 19.79 are generated.

Figure 19.78 STATS Output

The MODEL Procedure							
Dynamic Single-Equation Simulation							
Solution Range DATE = FEB1980 To NOV1991							
Descriptive Statistics							
Variable	N Obs	N	Actual		Predicted		
			Mean	Std Dev	Mean	Std Dev	
LHUR	142	142	7.0887	1.4509	7.2473	1.1465	
Statistics of fit							
Variable	N	Mean Error	Mean % Error	Mean Abs Error	Mean Abs % Error	RMS Error	RMS % Error
LHUR	142	0.1585	3.5289	0.6937	10.0001	0.7854	11.2452
Statistics of fit							
Variable	R-Square		Label				
LHUR	0.7049		UNEMPLOYMENT RATE: ALL WORKERS, 16 YEARS				

The number of observations (Nobs), the number of observations with both predicted and actual values nonmissing (N), and the mean and standard deviation of the actual and predicted values of the determined variables are printed first. The next set of columns in the output are defined as follows:

Mean Error	$\frac{1}{N} \sum_{j=1}^N (\hat{y}_j - y_j)$
Mean % Error	$\frac{100}{N} \sum_{j=1}^N (\hat{y}_j - y_j)/y_j$
Mean Abs Error	$\frac{1}{N} \sum_{j=1}^N \hat{y}_j - y_j $
Mean Abs % Error	$\frac{100}{N} \sum_{j=1}^N (\hat{y}_j - y_j)/y_j $
RMS Error	$\sqrt{\frac{1}{N} \sum_{j=1}^N (\hat{y}_j - y_j)^2}$
RMS % Error	$100 \sqrt{\frac{1}{N} \sum_{j=1}^N ((\hat{y}_j - y_j)/y_j)^2}$
R-square	$1 - SSE/CSSA$
SSE	$\sum_{j=1}^N (\hat{y}_j - y_j)^2$
SSA	$\sum_{j=1}^N (y_j)^2$
CSSA	$SSA - \left(\sum_{j=1}^N y_j\right)^2$
\hat{y}	predicted value
y	actual value

When the RANDOM= option is specified, the statistics do not include the unperturbed (_REP_=0) solution.

THEIL Option Output

The THEIL option specifies that Theil forecast error statistics be computed for the actual and predicted values and for the relative changes from lagged values. Mathematically, the quantities are

$$\hat{y}c = (\hat{y} - lag(y))/lag(y)$$

$$yc = (y - lag(y))/lag(y)$$

where $\hat{y}c$ is the relative change for the predicted value and yc is the relative change for the actual value.

Figure 19.79 THEIL Output

Theil Forecast Error Statistics								
Variable	N	MSE	Corr (R)	MSE Decomposition Proportions				
				Bias (UM)	Reg (UR)	Dist (UD)	Var (US)	Covar (UC)
LHUR	142	0.6168	0.85	0.04	0.01	0.95	0.15	0.81
Theil Forecast Error Statistics								
Variable	Inequality Coef			U	Label			
	U1							
LHUR		0.1086	0.0539		UNEMPLOYMENT RATE: ALL WORKERS, 16 YEARS			
Theil Relative Change Forecast Error Statistics								
Variable	N	Relative Change		MSE Decomposition Proportions				
		MSE	Corr (R)	Bias (UM)	Reg (UR)	Dist (UD)	Var (US)	Covar (UC)
LHUR	142	0.0126	-0.08	0.09	0.85	0.06	0.43	0.47
Theil Relative Change Forecast Error Statistics								
Variable	Inequality Coef			U	Label			
	U1							
LHUR		4.1226	0.8348		UNEMPLOYMENT RATE: ALL WORKERS, 16 YEARS			

The columns have the following meaning:

Corr (R) is the correlation coefficient, ρ , between the actual and predicted values.

$$\rho = \frac{\text{cov}(y, \hat{y})}{\sigma_a \sigma_p}$$

where σ_p and σ_a are the standard deviations of the predicted and actual values.

Bias (UM) is an indication of systematic error and measures the extent to which the average values of the actual and predicted deviate from each other.

$$\frac{(E(y) - E(\hat{y}))^2}{\frac{1}{N} \sum_{t=1}^N (y_t - \hat{y}_t)^2}$$

Reg (UR) is defined as $(\sigma_p - \rho * \sigma_a)^2 / \text{MSE}$. Consider the regression

$$y = \alpha + \beta \hat{y}$$

If $\hat{\beta} = 1$, UR will equal zero.

Dist (UD) is defined as $(1 - \rho^2)\sigma_a\sigma_a/MSE$ and represents the variance of the residuals obtained by regressing yc on $\hat{y}c$.

Var (US) is the variance proportion. US indicates the ability of the model to replicate the degree of variability in the endogenous variable.

$$US = \frac{(\sigma_p - \sigma_a)^2}{MSE}$$

Covar (UC) represents the remaining error after deviations from average values and average variabilities have been accounted for.

$$UC = \frac{2(1 - \rho)\sigma_p\sigma_a}{MSE}$$

U1 is a statistic that measures the accuracy of a forecast defined as follows:

$$U1 = \frac{\sqrt{MSE}}{\sqrt{\frac{1}{N} \sum_{t=1}^N (y_t)^2}}$$

U is the Theil's inequality coefficient defined as follows:

$$U = \frac{\sqrt{MSE}}{\sqrt{\frac{1}{N} \sum_{t=1}^N (y_t)^2} + \sqrt{\frac{1}{N} \sum_{t=1}^N (\hat{y}_t)^2}}$$

MSE is the mean square error. In the case of the relative change Theil statistics, the MSE is computed as follows:

$$MSE = \frac{1}{N} \sum_{t=1}^N (\hat{y}c_t - yc_t)^2$$

More information about these statistics can be found in the references Maddala (1977, 344–347) and Pindyck and Rubinfeld (1981, 364–365).

Goal Seeking: Solving for Right-Hand-Side Variables

The process of computing input values that are needed to produce target results is often called *goal seeking*. To compute a goal-seeking solution, use a SOLVE statement that lists the variables you want to solve for and provide a data set that contains values for the remaining variables.

Consider the following demand model for packaged rice

$$\text{quantity demanded} = \alpha_1 + \alpha_2 \text{price}^{2/3} + \alpha_3 \text{income}$$

where *price* is the price of the package and *income* is disposable personal income. The only variable the company has control over is the price it charges for rice. This model is estimated by using the following simulated data and PROC MODEL statements:

```

data demand;
  do t=1 to 40;
    price = (rannor(10) +5) * 10;
    income = 8000 * t ** (1/8);
    demand = 7200 - 1054 * price ** (2/3) +
              7 * income + 100 * rannor(1);
    output;
  end;
run;

data goal;
  demand = 85000;
  income = 12686;
run;

```

The goal is to find the price the company would have to charge to meet a sales target of 85,000 units. To do this, a data set is created with a DEMAND variable set to 85000 and with an INCOME variable set to 12686, the last income value.

The desired price is then determined by using the following PROC MODEL statements:

```

proc model data=demand
  outmodel=demandModel;
  demand = a1 - a2 * price ** (2/3) + a3 * income;
  fit demand / outest=demest;
  solve price / estdata=demest data=goal solveprint;
run;

```

The SOLVEPRINT option prints the solution values, number of iterations, and final residuals at each observation. The SOLVEPRINT output from this solve is shown in Figure 19.80.

Figure 19.80 Goal Seeking, SOLVEPRINT Output

The MODEL Procedure							
Single-Equation Simulation							
Observation	1	Iterations	6	CC	0.000000	ERROR.demand	0.000000
Solution Values							
price							
33.59016							

The output indicates that it took six Newton iterations to determine the PRICE of 33.5902, which makes the DEMAND value within 16E-11 of the goal of 85,000 units.

Consider a more ambitious goal of 100,000 units. The output shown in Figure 19.81 indicates that the sales target of 100,000 units is not attainable according to this model.

```

data goal;
    demand = 100000;
    income = 12686;
run;

proc model model=demandModel;
    solve price / estdata=demest data=goal solveprint;
run;

```

Figure 19.81 Goal Seeking, Convergence Failure

```

                                The MODEL Procedure
                                Single-Equation Simulation

ERROR: Could not reduce norm of residuals in 10 subiterations.
ERROR: The solution failed because 1 equations are missing or have extreme
       values for observation 1 at NEWTON iteration 1.

      Observation      1      Iteration      1      CC      -1.000000
                        Missing      1

                                The MODEL Procedure
                                Single-Equation Simulation

                                --- Listing of Program Data Vector ---
_N_:                12  ACTUAL.demand:    100000  ERROR.demand:      .
PRED.demand:        .  a1:                7126.437997  a2:                1040.841492
a3:                 6.992694  demand:        100000  income:                12686
price:              -0.000172
@PRED.demand/@pri:      .

```

The program data vector with the error note indicates that even after 10 subiterations, the norm of the residuals could not be reduced. The sales target of 100,000 units are unattainable with the given model. You might need to reformulate your model or collect more data to more accurately reflect the market response.

Numerical Solution Methods

If the SINGLE option is not used, PROC MODEL computes values that simultaneously satisfy the model equations for the variables named in the SOLVE statement. PROC MODEL provides three iterative methods, Newton, Jacobi, and Seidel, for computing a simultaneous solution of the system of nonlinear equations.

Single-Equation Solution

For normalized form equation systems, the solution either can simultaneously satisfy all the equations or can be computed for each equation separately, by using the actual values of the solution variables in the current period to compute each predicted value. By default, PROC MODEL computes a simultaneous solution. The SINGLE option in the SOLVE statement selects single-equation solutions.

Single-equation simulations are often made to produce residuals (which estimate the random terms of the stochastic equations) rather than the predicted values themselves. If the input data and range are the same as that used for parameter estimation, a static single-equation simulation reproduces the residuals of the estimation.

Newton's Method

The NEWTON option in the SOLVE statement requests Newton's method to simultaneously solve the equations for each observation. Newton's method is the default solution method. Newton's method is an iterative scheme that uses the derivatives of the equations with respect to the solution variables, \mathbf{J} , to compute a change vector as

$$\Delta \mathbf{y}^i = \mathbf{J}^{-1} \mathbf{q}(\mathbf{y}^i, \mathbf{x}, \boldsymbol{\theta})$$

PROC MODEL builds and solves \mathbf{J} by using efficient sparse matrix techniques. The solution variables \mathbf{y}^i at the i th iteration are then updated as

$$\mathbf{y}^{i+1} = \mathbf{y}^i + d \times \Delta \mathbf{y}^i$$

where d is a damping factor between 0 and 1 chosen iteratively so that

$$\|\mathbf{q}(\mathbf{y}^{i+1}, \mathbf{x}, \boldsymbol{\theta})\| < \|\mathbf{q}(\mathbf{y}^i, \mathbf{x}, \boldsymbol{\theta})\|$$

The number of subiterations allowed for finding a suitable d is controlled by the MAXSUBITER= option. The number of iterations of Newton's method allowed for each observation is controlled by MAXITER= option. See Ortega and Rheinbolt (1970) for more details.

Jacobi Method

The JACOBI option in the SOLVE statement selects a matrix-free alternative to Newton's method. This method is the traditional nonlinear Jacobi method found in the literature. The Jacobi method as implemented in PROC MODEL substitutes predicted values for the endogenous variables and iterates until a fixed point is reached. Then necessary derivatives are computed only for the diagonal elements of the jacobian, \mathbf{J} .

If the normalized form equation is

$$\mathbf{y} = \mathbf{f}(\mathbf{y}, \mathbf{x}, \boldsymbol{\theta})$$

the Jacobi iteration has the form

$$\mathbf{y}^{i+1} = \mathbf{f}(\mathbf{y}^i, \mathbf{x}, \boldsymbol{\theta})$$

Seidel Method

The Seidel method is an order-dependent alternative to the Jacobi method. The Seidel method is selected by the SEIDEL option in the SOLVE statement. The Seidel method is like the Jacobi method except that in the Seidel method the model is further edited to substitute the predicted values into the solution variables immediately after they are computed. Seidel thus differs from the other methods in that the values of the solution variables are not fixed within an iteration. With the other methods, the order of the equations in the model program makes no difference, but the Seidel method might work much differently when the equations are specified in a different sequence. Note that this fixed point method is the traditional nonlinear Seidel method found in the literature.

The iteration has the form

$$\mathbf{y}_j^{i+1} = \mathbf{f}(\hat{\mathbf{y}}^i, \mathbf{x}, \boldsymbol{\theta})$$

where \mathbf{y}_j^{i+1} is the j th equation variable at the i th iteration and

$$\hat{\mathbf{y}}^i = (y_1^{i+1}, y_2^{i+1}, y_3^{i+1}, \dots, y_{j-1}^{i+1}, y_j^i, y_{j+1}^i, \dots, y_g^i)'$$

If the model is recursive, and if the equations are in recursive order, the Seidel method converges at once. If the model is block-recursive, the Seidel method might converge faster if the equations are grouped by block and the blocks are placed in block-recursive order. The BLOCK option can be used to determine the block-recursive form.

Jacobi and Seidel Methods with General Form Equations

Jacobi and Seidel solution methods support general form equations.

There are two cases where derivatives are (automatically) computed. The first case is for equations with the solution variable on the right-hand side and on the left-hand side of the equation

$$y^i = f(\mathbf{x}, y^i)$$

In this case the derivative of `ERROR.y` with respect to y is computed, and the new y approximation is computed as

$$y^{i+1} = y^i - \frac{f(\mathbf{x}, y^i) - y^i}{\partial(f(\mathbf{x}, y^i) - y^i)/\partial y}$$

The second case is a system of equations that contains one or more `EQ.var` equations. In this case, a heuristic algorithm is used to make the assignment of a unique solution variable to each general form equation. Use the DETAILS option in the SOLVE statement to print a listing of the assigned variables.

Once the assignment is made, the new y approximation is computed as

$$y^{i+1} = y^i - \frac{f(\mathbf{x}, \mathbf{y}^i) - y^i}{\partial(f(\mathbf{x}, \mathbf{y}^i) - y^i)/\partial y}$$

If k is the number of general form equations, then k derivatives are required.

The convergence properties of the Jacobi and Seidel solution methods remain significantly poorer than the default Newton's method.

Comparison of Methods

Newton's method is the default and should work better than the others for most small- to medium-sized models. The Seidel method is always faster than the Jacobi for recursive models with equations in recursive order. For very large models and some highly nonlinear smaller models, the Jacobi or Seidel methods can sometimes be faster. Newton's method uses more memory than the Jacobi or Seidel methods.

Both the Newton's method and the Jacobi method are order-invariant in the sense that the order in which equations are specified in the model program has no effect on the operation of the iterative solution process. In order-invariant methods, the values of the solution variables are fixed for the entire execution of the model program. Assignments to model variables are automatically changed to assignments to corresponding equation variables. Only after the model program has completed execution are the results used to compute the new solution values for the next iteration.

Troubleshooting Problems

In solving a simultaneous nonlinear dynamic model you might encounter some of the following problems.

Missing Values

For SOLVE tasks, there can be no missing parameter values. Missing right-hand-side variables result in missing left-hand-side variables for that observation.

Unstable Solutions

A solution might exist but be unstable. An unstable system can cause the Jacobi and Seidel methods to diverge.

Explosive Dynamic Systems

A model might have well-behaved solutions at each observation but be dynamically unstable. The solution might oscillate wildly or grow rapidly with time.

Propagation of Errors

During the solution process, solution variables can take on values that cause computational errors. For example, a solution variable that appears in a LOG function might be positive at the solution but might be given a negative value during one of the iterations. When computational errors occur, missing values are generated and propagated, and the solution process might collapse.

Convergence Problems

The following items can cause convergence problems:

- There are illegal function values (for example $\sqrt{-1}$).

- There are local minima in the model equation.
- No solution exists.
- Multiple solutions exist.
- Initial values are too far from the solution.
- The CONVERGE= value is too small.

When PROC MODEL fails to find a solution to the system, the current iteration information and the program data vector are printed. The simulation halts if actual values are not available for the simulation to proceed. Consider the following program, which produces the output shown in Figure 19.82:

```
data test1;
  do t=1 to 50;
    x1 = sqrt(t) ;
    y = .;
    output;
  end;

proc model data=test1;
  exogenous x1 ;
  control a1 -1 b1 -29 c1 -4 ;
  y = a1 * sqrt(y) + b1 * x1 * x1 + c1 * lag(x1);
  solve y / out=sim forecast dynamic ;
run;
```

Figure 19.82 SOLVE Convergence Problems

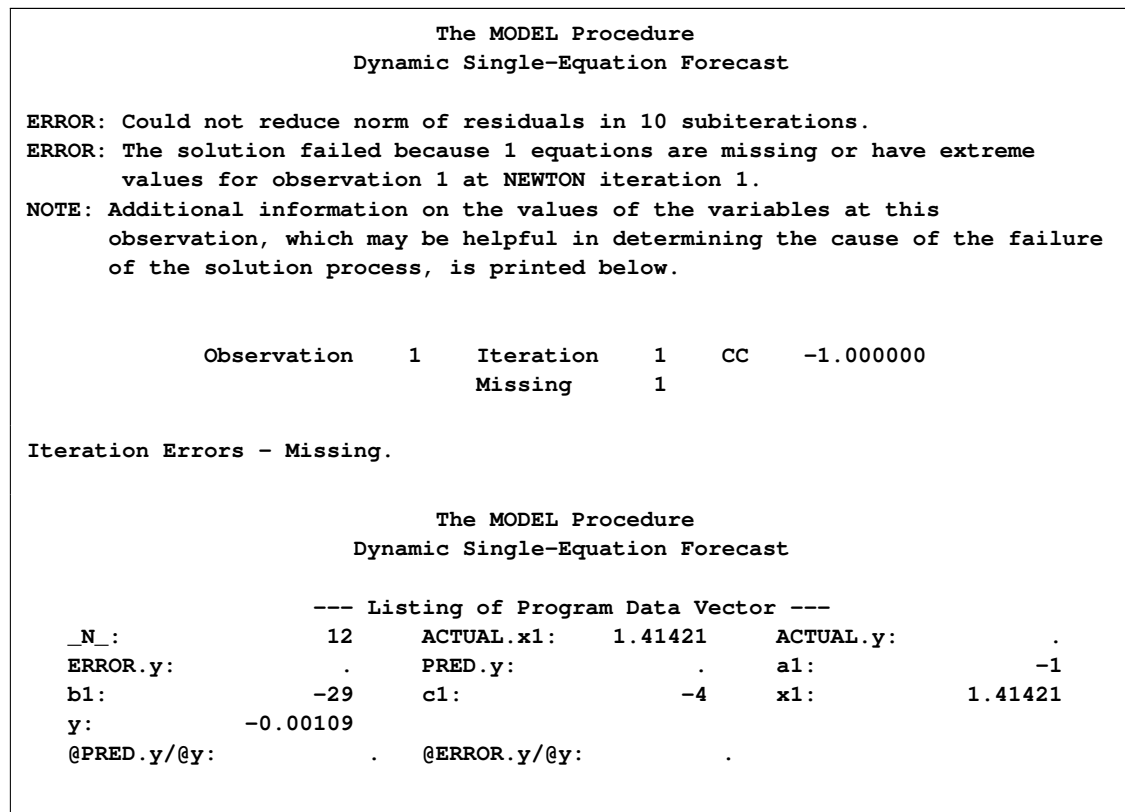


Figure 19.82 *continued*

NOTE: Check for missing input data or uninitialized lags.
 (Note that the LAG and DIF functions return missing values for the initial lag starting observations. This is a change from the 1982 and earlier versions of SAS/ETS which returned zero for uninitialized lags.)
 NOTE: Simulation aborted.

At the first observation, a solution to the following equation is attempted:

$$y = -\sqrt{y} - 62$$

There is no solution to this problem. The iterative solution process got as close as it could to making Y negative while still being able to evaluate the model. This problem can be avoided in this case by altering the equation.

In other models, the problem of missing values can be avoided by either altering the data set to provide better starting values for the solution variables or by altering the equations.

You should be aware that, in general, a nonlinear system can have any number of solutions and the solution found might not be the one that you want. When multiple solutions exist, the solution that is found is usually determined by the starting values for the iterations. If the value from the input data set for a solution variable is missing, the starting value for it is taken from the solution of the last period (if nonmissing) or else the solution estimate is started at 0.

Iteration Output

The iteration output, produced by the ITPRINT option, is useful in determining the cause of a convergence problem. The ITPRINT option forces the printing of the solution approximation and equation errors at each iteration for each observation. A portion of the ITPRINT output from the following statements is shown in Figure 19.83.

```
proc model data=test1;
  exogenous x1 ;
  control a1 -1 b1 -29 c1 -4 ;
  y = a1 * sqrt(abs(y)) + b1 * x1 * x1 + c1 * lag(x1);
  solve y / out=sim forecast dynamic itprint;
run;
```

For each iteration, the equation with the largest error is listed in parentheses after the Newton convergence criteria measure. From this output you can determine which equation or equations in the system are not converging well.

Figure 19.83 SOLVE, ITPRINT Output

The MODEL Procedure							
Dynamic Single-Equation Forecast							
Observation	1	Iteration	0	CC	613961.39	ERROR.y	-62.01010

Figure 19.83 *continued*

Predicted Values							
y							
0.0001000							
Iteration Errors							
y							
-62.01010							
Observation	1	Iteration	1	CC	50.902771	ERROR.y	-61.88684
Predicted Values							
y							
-1.215784							
Iteration Errors							
y							
-61.88684							
Observation	1	Iteration	2	CC	0.364806	ERROR.y	41.752112
Predicted Values							
y							
-114.4503							
Iteration Errors							
y							
41.75211							

Numerical Integration

The differential equation system is numerically integrated to obtain a solution for the derivative variables at each data point. The integration is performed by evaluating the provided model at multiple points between each data point. The integration method used is a variable order, variable step-size backward difference scheme; for more detailed information, see Aiken (1985) and Byrne and Hindmarsh (1975). The step size or time step is chosen to satisfy a *local truncation error* requirement. The term *truncation error* comes from the fact that the integration scheme uses a truncated series expansion of the integrated function to do the

integration. Because the series is truncated, the integration scheme is within the truncation error of the true value.

To further improve the accuracy of the integration, the total integration time is broken up into small intervals (time steps or step sizes), and the integration scheme is applied to those intervals. The integration at each time step uses the values computed at the previous time step so that the truncation error tends to accumulate. It is usually not possible to estimate the global error with much precision. The best that can be done is to monitor and to control the local truncation error, which is the truncation error committed at each time step relative to

$$d = \max_{0 \leq t \leq T} (\|y(t)\|_{\infty}, 1)$$

where $y(t)$ is the integrated variable. Furthermore, the $y(t)$ s are dynamically scaled to within two orders of magnitude of one to keep the error monitoring well-behaved.

The local truncation error requirement defaults to 1.0E–9. You can specify the LTEBOUND= option to modify that requirement. The LTEBOUND= option is a relative measure of accuracy, so a value smaller than 1.0E–10 is usually not practical. A larger bound increases the speed of the simulation and estimation but decreases the accuracy of the results. If the LTEBOUND= option is set too small, the integrator is not able to take time steps small enough to satisfy the local truncation error requirement and still have enough machine precision to compute the results. Since the integrations are scaled to within 1.0E–2 of one, the simulated values should be correct to at least seven decimal places.

There is a default minimum time step of 1.0E–14. This minimum time step is controlled by the MINTIMESTEP= option and the machine epsilon. If the minimum time step is smaller than the machine epsilon times the final time value, the minimum time step is increased automatically.

For the points between each observation in the data set, the values for nonintegrated variables in the data set are obtained from a linear interpolation from the two closest points. Lagged variables can be used with integrations, but their values are discrete and are not interpolated between points. Lagging, therefore, can then be used to input step functions into the integration.

The derivatives necessary for estimation (the gradient with respect to the parameters) and goal seeking (the Jacobian) are computed by numerically integrating analytical derivatives. The accuracy of the derivatives is controlled by the same integration techniques mentioned previously.

Limitations

There are limitations to the types of differential equations that can be solved or estimated. One type is an explosive differential equation (finite escape velocity) for which the following differential equation is an example:

$$y' = a \times y, a > 0$$

If this differential equation is integrated too far in time, y exceeds the maximum value allowed on the computer, and the integration terminates.

Likewise, differential systems that are singular cannot be solved or estimated in general. For example, consider the following differential system:

$$\begin{aligned}x' &= -y' + 2x + 4y + \exp(t) \\ y' &= -x' + y + \exp(4t)\end{aligned}$$

This system has an analytical solution, but an accurate numerical solution is very difficult to obtain. The reason is that y' and x' cannot be isolated on the left-hand side of the equation. If the equation is modified slightly to

$$\begin{aligned}x' &= -y' + 2x + 4y + \exp(t) \\ y' &= x' + y + \exp(4t)\end{aligned}$$

the system is nonsingular, but the integration process could still fail or be extremely slow. If the MODEL procedure encounters either system, a warning message is issued.

This system can be rewritten as the following recursive system, which can be estimated and simulated successfully with the MODEL procedure:

$$\begin{aligned}x' &= 0.5y + 0.5\exp(4t) + x + 1.5y - 0.5\exp(t) \\ y' &= x' + y + \exp(4t)\end{aligned}$$

Petzold (1982) mentions a class of differential algebraic equations that, when integrated numerically, could produce incorrect or misleading results. An example of such a system is

$$\begin{aligned}y_2'(t) &= y_1(t) + g_1(t) \\ 0 &= y_2(t) + g_2(t)\end{aligned}$$

The analytical solution to this system depends on g and its derivatives at the current time only and not on its initial value or past history. You should avoid systems of this and other similar forms mentioned in Petzold (1982).

SOLVE Data Sets

SDATA= Input Data Set

The SDATA= option reads a cross-equation covariance matrix from a data set. The covariance matrix read from the SDATA= data set specified in the SOLVE statement is used to generate random equation errors when the RANDOM= option specifies Monte Carlo simulation.

Typically, the `SDATA=` data set is created by the `OUTS=` option in a previous `FIT` statement. (The `OUTS=` data set from a `FIT` statement can be read back in by a `SOLVE` statement in the same `PROC MODEL` step.)

You can create an input `SDATA=` data set by using the `DATA` step. `PROC MODEL` expects to find a character variable `_NAME_` in the `SDATA=` data set as well as variables for the equations in the estimation or solution. For each observation with a `_NAME_` value that matches the name of an equation, `PROC MODEL` fills the corresponding row of the **S** matrix with the values of the names of equations found in the data set. If a row or column is omitted from the data set, an identity matrix row or column is assumed. Missing values are ignored. Since the **S** matrix is symmetric, you can include only a triangular part of the **S** matrix in the `SDATA=` data set with the omitted part indicated by missing values. If the `SDATA=` data set contains multiple observations with the same `_NAME_`, the last values supplied for the `_NAME_` variable are used. The section “[OUTS= Data Set](#)” on page 1189 contains more details on the format of this data set.

Use the `TYPE=` option to specify the type of estimation method used to produce the **S** matrix you want to input.

ESTDATA= Input Data Set

The `ESTDATA=` option specifies an input data set that contains an observation with values for some or all of the model parameters. It can also contain observations with the rows of a covariance matrix for the parameters.

When the `ESTDATA=` option is used, parameter values are set from the first observation. If the `RANDOM=` option is used and the `ESTDATA=` data set contains a covariance matrix, the covariance matrix of the parameter estimates is read and used to generate pseudo-random shocks to the model parameters for Monte Carlo simulation. These random perturbations have a multivariate normal distribution with the covariance matrix read from the `ESTDATA=` data set.

The `ESTDATA=` data set is usually created by the `OUTEST=` option in a `FIT` statement. The `OUTEST=` data set contains the parameter estimates produced by the `FIT` statement and also contains the estimated covariance of the parameter estimates if the `OUTCOV` option is used. This `OUTEST=` data set can be read in by the `ESTDATA=` option in a `SOLVE` statement.

You can also create an `ESTDATA=` data set with a SAS `DATA` step program. The data set must contain a numeric variable for each parameter to be given a value or covariance column. The name of the variable in the `ESTDATA=` data set must match the name of the parameter in the model. Parameters with names longer than 32 characters cannot be set from an `ESTDATA=` data set. The data set must also contain a character variable `_NAME_` of length 32. `_NAME_` has a blank value for the observation that gives values to the parameters. `_NAME_` contains the name of a parameter for observations that define rows of the covariance matrix.

More than one set of parameter estimates and covariances can be stored in the `ESTDATA=` data set if the observations for the different estimates are identified by the variable `_TYPE_`. `_TYPE_` must be a character variable of length eight. The `TYPE=` option is used to select for input the part of the `ESTDATA=` data set for which the value of the `_TYPE_` variable matches the value of the `TYPE=` option.

OUT= Data Set

The OUT= data set contains solution values, residual values, and actual values of the solution variables.

The OUT= data set contains the following variables:

- BY variables
- RANGE variable
- ID variables
- `_TYPE_`, a character variable of length eight that identifies the type of observation. The `_TYPE_` variable can be PREDICT, RESIDUAL, ACTUAL, or ERROR.
- `_MODE_`, a character variable of length eight that identifies the solution mode. `_MODE_` takes the value FORECAST or SIMULATE.
- if lags are used, a numeric variable, `_LAG_`, that contains the number of dynamic lags that contribute to the solution. The value of `_LAG_` is always zero for STATIC mode solutions. `_LAG_` is set to a missing value for lag-starting observations.
- if the RANDOM= option is used, `_REP_`, a numeric variable that contains the replication number. For example, if RANDOM=10, each input observation results in eleven output observations with `_REP_` values 0 through 10. The observations with `_REP_`=0 are from the unperturbed solution. (The random-number generator functions are suppressed, and the parameter and endogenous perturbations are zero when `_REP_`=0.)
- `_ERRORS_`, a numeric variable that contains the number of errors that occurred during the execution of the program for the last iteration for the observation. If the solution failed to converge, this is counted as one error, and the `_ERRORS_` variable is made negative.
- solution and other variables. The solution variables contain solution or predicted values for `_TYPE_`=PREDICT observations, residuals for `_TYPE_`=RESIDUAL observations, or actual values for `_TYPE_`=ACTUAL observations. The other model variables, and any other variables read from the input data set, are always actual values from the input data set.
- any other variables named in the OUTVARS statement. These can be program variables computed by the model program, CONTROL variables, parameters, or special variables in the model program. Compound variable names longer than 32 characters are truncated in the OUT= data set.

By default, only the predicted values are written to the OUT= data set. The OUTRESID, OUTACTUAL, and OUTERROR options are used to add the residual, actual, and ERROR. values, respectively, to the data set.

For examples of the OUT= data set, see [Example 19.6](#).

DATA= Input Data Set

The input data set should contain all of the exogenous variables and should supply nonmissing values for them for each period to be solved.

Solution variables can be supplied in the input data set and are used as follows:

- to supply initial lags. For example, if the lag length of the model is three, three observations are read in to feed the lags before any solutions are computed.
- to evaluate the goodness of fit. Goodness-of-fit measures are computed based on the difference between the solved values and the actual values supplied from the data set.
- to supply starting values for the iterative solution. If the value from the input data set for a solution variable is missing, the starting value for it is taken from the solution of the last period (if nonmissing) or else the solution estimate is started at zero.
- for STATIC mode solutions, actual values from the data set are used by the lagging functions for the solution variables.
- for FORECAST mode solutions, actual values from the data set are used as the solution values when nonmissing.

Programming Language Overview: MODEL Procedure

Variables in the Model Program

Variable names are alphanumeric but must start with a letter. The length is limited to 32 characters.

PROC MODEL uses several classes of variables, and different variable classes are treated differently. The variable class is controlled by *declaration statements*: the VAR, ENDOGENOUS, and EXOGENOUS statements for model variables, the PARAMETERS statement for parameters, and the CONTROL statement for control class variables. These declaration statements have several valid abbreviations. Various *internal variables* are also made available to the model program to allow communication between the model program and the procedure. RANGE, ID, and BY variables are also available to the model program. Those variables not declared as any of the preceding classes are *program variables*.

Some classes of variables can be lagged; that is, their value at each observation is remembered, and previous values can be referred to by the lagging functions. Other classes have only a single value and are not affected by lagging functions. For example, parameters have only one value and are not affected by lagging functions; therefore, if P is a parameter, $DIF_n(P)$ is always 0, and $LAG_n(P)$ is always the same as P for all values of n .

The different variable classes and their roles in the model are described in the following.

Model Variables

Model variables are declared by VAR, ENDOGENOUS, or EXOGENOUS statements, or by FIT and SOLVE statements. The model variables are the variables that the model is intended to explain or predict.

PROC MODEL enables you to use expressions on the left-hand side of the equal sign to define model equations. For example, a log-linear model for Y can be written as

$$\log(y) = a + b * x;$$

Previously, only a variable name was allowed on the left-hand side of the equal sign.

The text on the left-hand side of the equation serves as the equation name used to identify the equation in printed output, in the OUT= data sets, and in FIT or SOLVE statements. To refer to equations specified by using left-hand side expressions (in the FIT statement, for example), place the left-hand side expression in quotes. For example, the following statements fit a log-linear model to the dependent variable Y:

```
proc model data=in;
  log( y ) = a + b * x;
  fit "log(y)";
run;
```

The estimation and simulation is performed by transforming the models into general form equations. No actual or predicted value is available for general form equations, so no R^2 or adjusted R^2 is computed.

Equation Variables

An equation variable is one of several special variables used by PROC MODEL to control the evaluation of model equations. An equation variable name consists of one of the prefixes EQ, RESID, ERROR, PRED, or ACTUAL, followed by a period and the name of a model equation.

Equation variable names can appear in parts of the PROC MODEL printed output, and they can be used in the model program. For example, RESID-prefixed variables can be used in LAG functions to define equations with moving-average error terms. See the section “[Autoregressive Moving-Average Error Processes](#)” on page 1165 for details.

The meaning of these prefixes is detailed in the section “[Equation Translations](#)” on page 1232.

Parameters

Parameters are variables that have the same value for each observation. Parameters can be given values or can be estimated by fitting the model to data. During the SOLVE stage, parameters are treated as constants. If no estimation is performed, the SOLVE stage uses the initial value provided in the ESTDATA= data set, the MODEL= file, or in the PARAMETER statement, as the value of the parameter.

The PARAMETERS statement declares the parameters of the model. Parameters are not lagged, and they cannot be changed by the model program.

Control Variables

Control variables supply constant values to the model program that can be used to control the model in various ways. The CONTROL statement declares control variables and specifies their values. A control variable is like a parameter except that it has a fixed value and is not estimated from the data.

Control variables are not reinitialized before each pass through the data and can thus be used to retain values between passes. You can use control variables to vary the program logic. Control variables are not affected by lagging functions.

For example, if you have two versions of an equation for a variable Y, you could put both versions in the model and, by using a CONTROL statement to select one of them, produce two different solutions to explore the effect the choice of equation has on the model, as shown in the following statements:

```
select (case);
  when (1) y = ...first version of equation... ;
  when (2) y = ...second version of equation... ;
end;

control case 1;
solve / out=case1;
run;

control case 2;
solve / out=case2;
run;
```

RANGE, ID, and BY Variables

The RANGE statement controls the range of observations in the input data set that is processed by PROC MODEL. The ID statement lists variables in the input data set that are used to identify observations in the printout and in the output data set. The BY statement can be used to make PROC MODEL perform a separate analysis for each BY group. The variable in the RANGE statement, the ID variables, and the BY variables are available for the model program to examine, but their values should not be changed by the program. The BY variables are not affected by lagging functions.

Internal Variables

You can use several internal variables in the model program to communicate with the procedure. For example, if you want PROC MODEL to list the values of all the variables when more than 10 iterations are performed and the procedure is past the 20th observation, you can write

```
if _obs_ > 20 then if _iter_ > 10 then _list_ = 1;
```

Internal variables are not affected by lagging functions, and they cannot be changed by the model program except as noted. The following internal variables are available. The variables are all numeric except where noted.

<code>_ERRORS_</code>	is a flag that is set to 0 at the start of program execution and is set to a nonzero value whenever an error occurs. The program can also set the <code>_ERRORS_</code> variable.
<code>_ITER_</code>	is the iteration number. For FIT tasks, the value of <code>_ITER_</code> is negative for preliminary grid-search passes. The iterative phase of the estimation starts with iteration 0. After the estimates have converged, a final pass is made to collect statistics with <code>_ITER_</code> set to a missing value. Note that at least one pass, and perhaps several subiteration passes as well, is made for each iteration. For SOLVE tasks, <code>_ITER_</code> counts the iterations used to compute the simultaneous solution of the system.
<code>_LAG_</code>	is the number of dynamic lags that contribute to the solution at the current observation. <code>_LAG_</code> is always 0 for FIT tasks and for STATIC solutions. <code>_LAG_</code> is set to a missing value during the lag starting phase.
<code>_LIST_</code>	is a list flag that is set to 0 at the start of program execution. The program can set <code>_LIST_</code> to a nonzero value to request a listing of the values of all the variables in the program after the program has finished executing.
<code>_METHOD_</code>	is the solution method in use for SOLVE tasks. <code>_METHOD_</code> is set to a blank value for FIT tasks. <code>_METHOD_</code> is a character-valued variable. Values are NEWTON, JACOBI, SIEDEL, or ONEPASS.
<code>_MODE_</code>	takes the value ESTIMATE for FIT tasks and the value SIMULATE or FORECAST for SOLVE tasks. <code>_MODE_</code> is a character-valued variable.
<code>_NMISS_</code>	is the number of missing or otherwise unusable observations during the model estimation. For FIT tasks, <code>_NMISS_</code> is initially set to 0; at the start of each iteration, <code>_NMISS_</code> is set to the number of unusable observations for the previous iteration. For SOLVE tasks, <code>_NMISS_</code> is set to a missing value.
<code>_NUSED_</code>	is the number of nonmissing observations used in the estimation. For FIT tasks, PROC MODEL initially sets <code>_NUSED_</code> to the number of parameters; at the start of each iteration, <code>_NUSED_</code> is reset to the number of observations used in the previous iteration. For SOLVE tasks, <code>_NUSED_</code> is set to a missing value.
<code>_OBS_</code>	counts the observations being processed. <code>_OBS_</code> is negative or 0 for observations in the lag starting phase.
<code>_REP_</code>	is the replication number for Monte Carlo simulation when the RANDOM= option is specified in the SOLVE statement. <code>_REP_</code> is 0 when the RANDOM= option is not used and for FIT tasks. When <code>_REP_=0</code> , the random-number generator functions always return 0.
<code>_WEIGHT_</code>	is the weight of the observation. For FIT tasks, <code>_WEIGHT_</code> provides a weight for the observation in the estimation. <code>_WEIGHT_</code> is initialized to 1.0 at the start of execution for FIT tasks. For SOLVE tasks, <code>_WEIGHT_</code> is ignored.

Program Variables

Variables not in any of the other classes are called program variables. Program variables are used to hold intermediate results of calculations. Program variables are reinitialized to missing values before each observation is processed. Program variables can be lagged. The RETAIN statement can be used to give program variables initial values and enable them to keep their values between observations.

Character Variables

PROC MODEL supports both numeric and character variables. Character variables are not involved in the model specification but can be used to label observations, to write debugging messages, or for documentation purposes. All variables are numeric unless they are the following.

- character variables in a DATA= SAS data set
- program variables assigned a character value
- declared to be character by a LENGTH or ATTRIB statement

Equation Translations

Equations written in normalized form are always automatically converted to general form equations. For example, when a normalized form equation such as

$$y = a + b \cdot x;$$

is encountered, it is translated into the equations

```
PRED.y = a + b*x;
RESID.y = PRED.y - ACTUAL.y;
ERROR.y = PRED.y - y;
```

If the same system is expressed as the following general form equation, then this equation is used unchanged.

$$EQ.y = y - (a + b \cdot x);$$

This makes it easy to solve for arbitrary variables and to modify the error terms for autoregressive or moving average models.

Use the LIST option to see how this transformation is performed. For example, the following statements produce the listing shown in [Figure 19.84](#).

```
proc model data=line list;
  y = a1 + b1*x1 + c1*x2;
  fit y;
run;
```

Figure 19.84 LIST Output

The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	3997:4	PRED.y = a1 + b1 * x1 + c1 * x2;
1	3997:4	RESID.y = PRED.y - ACTUAL.y;
1	3997:4	ERROR.y = PRED.y - y;

PRED.Y is the predicted value of Y, and ACTUAL.Y is the value of Y in the data set. The predicted value minus the actual value, RESID.Y, is then the error term, ϵ , for the original Y equation. Note that the residuals obtained from the OUTRESID option in the OUT=dataset for both the FIT and SOLVE statements are defined as *actual – predicted*, the negative of RESID.Y. See the section “[Syntax: MODEL Procedure](#)” on page 1042 for details. ACTUAL.Y and Y have the same value for parameter estimation. For solve tasks, ACTUAL.Y is still the value of Y in the data set but Y becomes the solved value; the value that satisfies $\text{PRED.Y} - Y = 0$.

The following are the equation variable definitions.

- EQ.** The value of an EQ.-prefixed equation variable (normally used to define a general form equation) represents the failure of the equation to hold. When the EQ.name variable is 0, the name equation is satisfied.
- RESID.** The RESID.name variables represent the stochastic parts of the equations and are used to define the objective function for the estimation process. A RESID.-prefixed equation variable is like an EQ.-prefixed variable but makes it possible to use or transform the stochastic part of the equation. The RESID. equation is used in place of the ERROR. equation for model solutions if it has been reassigned or used in the equation.
- ERROR.** An ERROR.name variable is like an EQ.-prefixed variable, except that it is used only for model solution and does not affect parameter estimation.
- PRED.** For a normalized form equation (specified by assignment to a model variable), the PRED.name equation variable holds the predicted value, where name is the name of both the model variable and the corresponding equation. (PRED.-prefixed variables are not created for general form equations.)
- ACTUAL.** For a normalized form equation (specified by assignment to a model variable), the ACTUAL.name equation variable holds the value of the name model variable read from the input data set.
- DERT.** The DERT.name variable defines a differential equation. Once defined, it might be used on the right-hand side of another equation.
- H.** The H.name variable specifies the functional form for the variance of the named equation.
- GMM_H.** This is created for H.vars and is the moment equation for the variance for GMM. This variable is used only for GMM.

GMM_H.name = RESID.name2 - H.name;**

MSE. The `MSE.y` variable contains the value of the mean squared error for `y` at each iteration. An `MSE.` variable is created for each dependent/endogenous variable in the model. These variables can be used to specify the missing lagged values in the estimation and simulation of GARCH type models.

```
demret = intercept ;
h.demret = arch0 +
            arch1 * xlag( resid.demret ** 2, mse.demret) +
            garch1 * xlag(h.demret, mse.demret) ;
```

NRESID. This is created for `H.vars` and is the normalized residual of the variable `<name>`. The formula is

```
NRESID.name = RESID.name / sqrt(H.name) ;
```

The three equation variable prefixes, `RESID.`, `ERROR.`, and `EQ.` allow for control over the objective function for the `FIT`, the `SOLVE`, or both the `FIT` and the `SOLVE` stages. For `FIT` tasks, `PROC MODEL` looks first for a `RESID.name` variable for each equation. If defined, the `RESID.`-prefixed equation variable is used to define the objective function for the parameter estimation process. Otherwise, `PROC MODEL` looks for an `EQ.`-prefixed variable for the equation and uses it instead.

For `SOLVE` tasks, `PROC MODEL` looks first for an `ERROR.name` variable for each equation. If defined, the `ERROR.`-prefixed equation variable is used for the solution process. Otherwise, `PROC MODEL` looks for an `EQ.`-prefixed variable for the equation and uses it instead. To solve the simultaneous equation system, `PROC MODEL` computes values of the solution variables (the model variables being solved for) that make all of the `ERROR.name` and `EQ.name` variables close to 0.

Derivatives

Nonlinear modeling techniques require the calculation of derivatives of certain variables with respect to other variables. The `MODEL` procedure includes an analytic differentiator that determines the model derivatives and generates program code to compute these derivatives. When parameters are estimated, the `MODEL` procedure takes the derivatives of the equation with respect to the parameters. When the model is solved, Newton's method requires the derivatives of the equations with respect to the variables solved for.

`PROC MODEL` uses exact mathematical formulas for derivatives of non-user-defined functions. For other functions, numerical derivatives are computed and used.

The differentiator differentiates the entire model program, including the conditional logic and flow of control statements. Delayed definitions, as when the `LAG` of a program variable is referred to before the variable is assigned a value, are also differentiated correctly.

The differentiator includes optimization features that produce efficient code for the calculation of derivatives. However, when flow of control statements such as `GOTO` statements are used, the optimization process is impeded, and less efficient code for derivatives might be produced. Optimization is also reduced by conditional statements, iterative `DO` loops, and multiple assignments to the same variable.

The table of derivatives is printed with the LISTDER option. The code generated for the computation of the derivatives is printed with the LISTCODE option.

Derivative Variables

When the differentiator needs to generate code to evaluate the expression for the derivative of a variable, the result is stored in a special derivative variable. Derivative variables are not created when the derivative expression reduces to a previously computed result, a variable, or a constant. The names of derivative variables, which might sometimes appear in the printed output, have the form *@obj/@wrt*, where *obj* is the variable whose derivative is being taken and *wrt* is the variable that the differentiation is with respect to. For example, the derivative variable for the derivative of *Y* with respect to *X* is named *@Y/@X*.

The derivative variables can be accessed or used as part of the model program using the GETDER() function.

GETDER(*x*, *a*) the derivative of *x* with respect to *a*.

GETDER(*x*, *a*, *b*) the second derivative of *x* with respect to *a* and *b*.

The main purpose of the GETDER() function is for surfacing the derivatives so they can be stored in a data set for further processing. Only derivatives that are implied by the problem are available to the GETDER() function. When derivatives are requested that aren't already created, a missing value will be returned. The derivative of the GETDER() function is always zero so the results of the GETDER() function shouldn't be used in any of the equations in the FIT or the SOLVE statement.

The following example adds the gradient of the PRED.y value with respect to the parameters to the OUT= data set.

```
proc model data=line ;
  y = a1 + b1**2 *x1 + c1*x2;
  Dy_a1 = getder(PRED.y, a1);
  Dy_b1 = getder(PRED.y, b1);
  Dy_c1 = getder(PRED.y, c1);
  outvars Dy_a1 Dy_b1 Dy_c1;
  fit y / out=grad;
run;
```

Mathematical Functions

The following is a brief summary of SAS functions that are useful for defining models. Additional functions and details are in *SAS Language: Reference*. Information about creating new functions can be found in *SAS/BASE Software: Procedure Reference*, Chapter 18, "The FCMP Procedure."

ABS(<i>x</i>)	the absolute value of <i>x</i>
ARCOS(<i>x</i>)	the arccosine in radians of <i>x</i> ; <i>x</i> should be between -1 and 1 .
ARSIN(<i>x</i>)	the arcsine in radians of <i>x</i> ; <i>x</i> should be between -1 and 1 .
ATAN(<i>x</i>)	the arctangent in radians of <i>x</i>

<code>COS(<i>x</i>)</code>	the cosine of <i>x</i> ; <i>x</i> is in radians.
<code>COSH(<i>x</i>)</code>	the hyperbolic cosine of <i>x</i>
<code>EXP(<i>x</i>)</code>	e^x
<code>LOG(<i>x</i>)</code>	the natural logarithm of <i>x</i>
<code>LOG10(<i>x</i>)</code>	the log base ten of <i>x</i>
<code>LOG2(<i>x</i>)</code>	the log base two of <i>x</i>
<code>SIN(<i>x</i>)</code>	the sine of <i>x</i> ; <i>x</i> is in radians.
<code>SINH(<i>x</i>)</code>	the hyperbolic sine of <i>x</i>
<code>SQRT(<i>x</i>)</code>	the square root of <i>x</i>
<code>TAN(<i>x</i>)</code>	the tangent of <i>x</i> ; <i>x</i> is in radians and is not an odd multiple of $\pi/2$.
<code>TANH(<i>x</i>)</code>	the hyperbolic tangent of <i>x</i>

Random-Number Functions

The MODEL procedure provides several functions for generating random numbers for Monte Carlo simulation. These functions use the same generators as the corresponding SAS DATA step functions.

The following random number functions are supported: RANBIN, RANCAU, RAND, RANEXP, RANGAM, RANNOR, RANPOI, RANTBL, RANTRI, and RANUNI. For more information, refer to *SAS Language: Reference*.

Each reference to a random number function sets up a separate pseudo-random sequence. Note that this means that two calls to the same random function with the same seed produce identical results. This is different from the behavior of the random number functions used in the SAS DATA step. For example, the following statements produce identical values for X and Y, but Z is from an independent pseudo-random sequence:

```
x=rannor(123);
y=rannor(123);
z=rannor(567);
q=rand('BETA', 1, 12 );
```

For FIT tasks, all random number functions always return 0. For SOLVE tasks, when Monte Carlo simulation is requested, a random number function computes a new random number on the first iteration for an observation (if it is executed on that iteration) and returns that same value for all later iterations of that observation. When Monte Carlo simulation is not requested, random number functions always return 0.

Functions across Time

PROC MODEL provides four types of special built-in functions that refer to the values of variables and expressions in previous time periods. These functions have the following forms where *n* represents the

number of periods, x is any expression, and the argument i is a variable or expression that gives the lag length ($0 \leq i \leq n$). If the index value i is omitted, the maximum lag length n is used.

$LAGn (< i, > x)$ returns the i th lag of x , where n is the maximum lag;

$DIFn (x)$ is the difference of x at lag n

$ZLAGn (< i, > x)$ returns the i th lag of x , where n is the maximum lag, with missing lags replaced with zero

$XLAGn (x, y)$ returns the n th lag of x if x is nonmissing, or y if x is missing

$ZDIFn (x)$ is the difference with lag length truncated and missing values converted to zero; x is the variable or expression to compute the moving average of

$MOVAVGn (x)$ is the moving average if X_t denotes the observation at time point t , to ensure compatibility with the number n of observations used to calculate the moving average $MOVAVGn$, the following definition is used:

$$MOVAVGn(X_t) = \frac{X_t + X_{t-1} + X_{t-2} + \dots + X_{t-n+1}}{n}$$

The moving average calculation for SAS 9.1 and earlier releases is as follows:

$$MOVAVGn(X_t) = \frac{X_t + X_{t-1} + X_{t-2} + \dots + X_{t-n}}{n + 1}$$

Missing values of x are omitted in computing the average.

If you do not specify n , the number of periods is assumed to be one. For example, $LAG(X)$ is the same as $LAG1(X)$. No more than four digits can be used with a lagging function; that is, $LAG9999$ is the greatest LAG function, $ZDIF9999$ is the greatest ZDIF function, and so on.

The LAG functions get values from previous observations and make them available to the program. For example, $LAG(X)$ returns the value of the variable X as it was computed in the execution of the program for the preceding observation. The expression $LAG2(X+2*Y)$ returns the value of the expression $X+2*Y$, computed by using the values of the variables X and Y that were computed by the execution of the program for the observation two periods ago.

The DIF functions return the difference between the current value of a variable or expression and the value of its LAG. For example, $DIF2(X)$ is a short way of writing $X-LAG2(X)$, and $DIF15(SQRT(2*Z))$ is a short way of writing $SQRT(2*Z)-LAG15(SQRT(2*Z))$.

The ZLAG and ZDIF functions are like the LAG and DIF functions, but they are not counted in the determination of the program lag length, and they replace missing values with 0s. The ZLAG function returns the lagged value if the lagged value is nonmissing, or 0 if the lagged value is missing. The ZDIF function returns the differenced value if the differenced value is nonmissing, or 0 if the value of the differenced value is missing. The ZLAG function is especially useful for models with ARMA error processes. See the next section for details.

Lag Logic

The LAG and DIF lagging functions in the MODEL procedure are different from the queuing functions with the same names in the DATA step. Lags are determined by the final values that are set for the program

variables by the execution of the model program for the observation. This can have upsetting consequences for programs that take lags of program variables that are given different values at various places in the program, as shown in the following statements:

```
temp = x + w;
t    = lag( temp );
temp = q - r;
s    = lag( temp );
```

The expression LAG(TEMP) always refers to LAG(Q–R), never to LAG(X+W), since Q–R is the final value assigned to the variable TEMP by the model program. If LAG(X+W) is wanted for T, it should be computed as T=LAG(X+W) and not T=LAG(TEMP), as in the preceding example.

Care should also be exercised in using the DIF functions with program variables that might be reassigned later in the program. For example, the program

```
temp = x ;
s    = dif( temp );
temp = 3 * y;
```

computes values for S equivalent to

```
s = x - lag( 3 * y );
```

Note that in the preceding examples, TEMP is a program variable, *not* a model variable. If it were a model variable, the assignments to it would be changed to assignments to a corresponding equation variable.

Note that whereas LAG1(LAG1(X)) is the same as LAG2(X), DIF1(DIF1(X)) is *not* the same as DIF2(X). The DIF2 function is the difference between the current period value at the point in the program where the function is executed and the final value at the end of execution two periods ago; DIF2 is not the second difference. In contrast, DIF1(DIF1(X)) is equal to DIF1(X)-LAG1(DIF1(X)), which equals X–2*LAG1(X)+LAG2(X), which is the second difference of X.

More information about the differences between PROC MODEL and the DATA step LAG and DIF functions is found in Chapter 3, “[Working with Time Series Data](#).”

Lag Lengths

The lag length of the model program is the number of lags needed for any relevant equation. The program lag length controls the number of observations used to initialize the lags.

PROC MODEL keeps track of the use of lags in the model program and automatically determines the lag length of each equation and of the model as a whole. PROC MODEL sets the program lag length to the maximum number of lags needed to compute any equation to be estimated, solved, or needed to compute any instrument variable used.

In determining the lag length, the ZLAG and ZDIF functions are treated as always having a lag length of 0. For example, if Y is computed as


```
y = lag2( x + zdif3( temp ) );
```

then Y has a lag length of 2 (regardless of how TEMP is defined). If Y is computed as

```
y = zlag2( x + dif3( temp ) );
```

then Y has a lag length of 0.

This is so that ARMA errors can be specified without causing the loss of additional observations to the lag starting phase and so that recursive lag specifications, such as moving-average error terms, can be used. Recursive lags are not permitted unless the ZLAG or ZDIF functions are used to truncate the lag length. For example, the following statement produces an error message:

```
t = a + b * lag( t );
```

The program variable T depends recursively on its own lag, and the lag length of T is therefore undefined.

In the following equation RESID.Y depends on the predicted value for the Y equation but the predicted value for the Y equation depends on the LAG of RESID.Y, and thus, the predicted value for the Y equation depends recursively on its own lag.

```
y = yhat + ma * lag( resid.y );
```

The lag length is infinite, and PROC MODEL prints an error message and stops. Since this kind of specification is allowed, the recursion must be truncated at some point. The ZLAG and ZDIF functions do this.

The following equation is valid and results in a lag length for the Y equation equal to the lag length of YHAT:

```
y = yhat + ma * zlag( resid.y );
```

Initially, the lags of RESID.Y are missing, and the ZLAG function replaces the missing residuals with 0s, their unconditional expected values.

The ZLAG0 function can be used to zero out the lag length of an expression. ZLAG0(*x*) returns the current period value of the expression *x*, if nonmissing, or else returns 0, and prevents the lag length of *x* from contributing to the lag length of the current statement.

Initializing Lags

At the start of each pass through the data set or BY group, the lag variables are set to missing values and an initialization is performed to fill the lags. During this phase, observations are read from the data set, and the model variables are given values from the data. If necessary, the model is executed to assign values

to program variables that are used in lagging functions. The results for variables used in lag functions are saved. These observations are not included in the estimation or solution.

If, during the execution of the program for the lag starting phase, a lag function refers to lags that are missing, the lag function returns missing. Execution errors that occur while starting the lags are not reported unless requested. The modeling system automatically determines whether the program needs to be executed during the lag starting phase.

If *L* is the maximum lag length of any equation being fit or solved, then the first *L* observations are used to prime the lags. If a *BY* statement is used, the first *L* observations in the *BY* group are used to prime the lags. If a *RANGE* statement is used, the first *L* observations prior to the first observation requested in the *RANGE* statement are used to prime the lags. Therefore, there should be at least *L* observations in the data set.

Initial values for the lags of model variables can also be supplied in *VAR*, *ENDOGENOUS*, and *EXOGENOUS* statements. This feature provides initial lags of solution variables for dynamic solution when initial values for the solution variable are not available in the input data set. For example, the statement

```
var x 2 3 y 4 5 z 1;
```

feeds the initial lags exactly like these values in an input data set:

Lag	X	Y	Z
2	3	5	.
1	2	4	1

If initial values for lags are available in the input data set and initial lag values are also given in a declaration statement, the values in the *VAR*, *ENDOGENOUS*, or *EXOGENOUS* statements take priority.

The *RANGE* statement is used to control the range of observations in the input data set that are processed by PROC MODEL. In the following statement, '01jan1924' specifies the starting period of the range, and '01dec1943' specifies the ending period:

```
range date = '01jan1924'd to '01dec1943'd;
```

The observations in the data set immediately prior to the start of the range are used to initialize the lags.

Language Differences

For the most part, PROC MODEL programming statements work the same as they do in the DATA step as documented in *SAS Language: Reference*. However, there are several differences that should be noted.

DO Statement Differences

The DO statement in PROC MODEL does not allow a character index variable. Thus, the following DO statement is not valid in PROC MODEL, although it is supported in the DATA step:

```
do i = 'A', 'B', 'C'; /* invalid PROC MODEL code */
```

IF Statement Differences

The IF statement in PROC MODEL does not allow a character-valued condition. For example, the following IF statement is not supported by PROC MODEL:

```
if 'this' then statement;
```

Comparisons of character values are supported in IF statements, so the following IF statement is acceptable:

```
if 'this' < 'that' then statement;
```

PROC MODEL allows for embedded conditionals in expressions. For example the following two statements are equivalent:

```
flag = if time = 1 or time = 2 then conc+30/5 + dose*time
      else if time > 5 then (0=1) else (patient * flag);
```

```
if time = 1 or time = 2 then flag= conc+30/5 + dose*time;
else if time > 5 then flag=(0=1); else flag=patient*flag;
```

Note that the ELSE operator involves only the first object or token after it so that the following assignments are not equivalent:

```
total = if sum > 0 then sum else sum + reserve;
total = if sum > 0 then sum else (sum + reserve);
```

The first assignment makes TOTAL always equal to SUM plus RESERVE.

PUT Statement Differences

The PUT statement, mostly used in PROC MODEL for program debugging, supports only some of the features of the DATA step PUT statement. It also has some new features that the DATA step PUT statement does not support.

The PROC MODEL PUT statement does not support line pointers, factored lists, iteration factors, overprinting, the `_INFILE_` option, or the colon (:) format modifier.

The PROC MODEL PUT statement does support expressions, but an expression must be enclosed in parentheses. For example, the following statement prints the square root of x:

```
put (sqrt(x));
```

Subscripted array names must be enclosed in parentheses. For example, the following statement prints the *i*th element of the array A:

```
put (a i);
```

However, the following statement is an error:

```
put a i;
```

The PROC MODEL PUT statement supports the print item `_PDV_` to print a formatted listing of all the variables in the program. For example, the following statement prints a much more readable listing of the variables than does the `_ALL_` print item:

```
put _pdv_;
```

To print all the elements of the array A, use the following statement:

```
put a;
```

To print all the elements of A with each value labeled by the name of the element variable, use the following statement:

```
put a=;
```

ABORT Statement Difference

In the MODEL procedure, the ABORT statement does not allow any arguments.

SELECT/WHEN/OTHERWISE Statement Differences

The WHEN and OTHERWISE statements allow more than one target statement. That is, DO groups are not necessary for multiple statement WHENs. For example in PROC MODEL, the following syntax is valid:

```
select;
  when (exp1)
    stmt1;
    stmt2;
  when (exp2)
    stmt3;
    stmt4;
end;
```

The ARRAY Statement

ARRAY *arrayname* < {*dimensions*} > < \$ [*length*] > < *variables and constants* > ; ;

The ARRAY statement is used to associate a name with a list of variables and constants. The array name can then be used with subscripts in the model program to refer to the items in the list.

In PROC MODEL, the ARRAY statement does not support all the features of the DATA step ARRAY statement. Implicit indexing cannot be used; all array references must have explicit subscript expressions. Only exact array dimensions are allowed; lower-bound specifications are not supported. A maximum of six dimensions is allowed.

On the other hand, the ARRAY statement supported by PROC MODEL does allow both variables and constants to be used as array elements. You cannot make assignments to constant array elements. Both dimension specification and the list of elements are optional, but at least one must be supplied. When the list of elements is not given or fewer elements than the size of the array are listed, array variables are created by suffixing element numbers to the array name to complete the element list.

The following are valid PROC MODEL array statements:

```
array x[120];           /* array X of length 120           */
array q[2,2];           /* Two dimensional array Q           */
array b[4] va vb vc vd; /* B[2] = VB, B[4] = VD             */
array x x1-x30;         /* array X of length 30, X[7] = X7   */
array a[5] (1 2 3 4 5); /* array A initialized to 1,2,3,4,5 */
```

RETAIN Statement

RETAIN *variables initial-values* ;

The RETAIN statement causes a program variable to hold its value from a previous observation until the variable is reassigned. The RETAIN statement can be used to initialize program variables.

The RETAIN statement does not work for model variables, parameters, or control variables because the values of these variables are under the control of PROC MODEL and not programming statements. Use the PARS and CONTROL statements to initialize parameters and control variables. Use the VAR, ENDOGENOUS, or EXOGENOUS statement to initialize model variables.

Storing Programs in Model Files

Models can be saved in and recalled from SAS catalog files as well as XML-based data sets. SAS catalogs are special files that can store many kinds of data structures as separate units in one SAS file. Each separate unit is called an entry, and each entry has an entry type that identifies its structure to the SAS system. Starting with SAS 9.2, model files are being stored as SAS data sets instead of being stored as members of a SAS catalog as in earlier releases. This makes MODEL files more readily extendable in the future and enables Java-based applications to read the MODEL files directly. You can choose between the two formats by specifying a global CMPMODEL option in an OPTIONS statement. Details are given below.

In general, to save a model, use the `OUTMODEL=name` option in the `PROC MODEL` statement, where *name* is specified as *libref.catalog.entry*, *libref.entry*, or *entry* for catalog entry and, starting with SAS 9.2, *libref.datasetname* or *datasetname* for XML-based SAS datasets. The *libref*, *catalog*, *datasetnames* and *entry* names must be valid SAS names no more than 32 characters long. The *catalog* name is restricted to seven characters on the CMS operating system. If not given, the *catalog* name defaults to `MODELS`, and the *libref* defaults to `WORK`. The entry type is always `MODEL`. Thus, `OUTMODEL=X` writes the model to the file `WORK.MODELS.X.MODEL` in the SAS catalog or creates a `WORK.X` XML-based dataset in the `WORK` library depending on the format chosen by using the `CMPMODEL=` option. By default, both these formats are chosen.

The `CMPMODEL=` option can be used in an `OPTIONS` statement to modify the behavior when reading and writing `MODEL` files. The values allowed are `CMPMODEL= BOTH | XML | CATALOG`. For example, the following statements restore the previous behavior:

```
options cmpmodel=catalog;
```

The `CMPMODEL=` option defaults to `BOTH` in SAS 9.2 and is intended for transitional use. If `CMPMODEL=BOTH`, the `MODEL` procedure writes both formats; when loading model files `PROC MODEL` attempts to load the XML version first and the `CATALOG` version second (if the XML version is not found). If `CMPMODEL=XML`, the `MODEL` procedure reads and writes only the XML format. If `CMPMODEL=CATALOG`, only the catalog format is used.

The `MODEL=` option is used to read in a model. A list of model files can be specified in the `MODEL=` option, and a range of names with numeric suffixes can be given, as in `MODEL=(MODEL1–MODEL10)`. When more than one model file is given, the list must be placed in parentheses, as in `MODEL=(A B C)`, except in case of a single name. If more than one model file is specified, the files are combined in the order listed in the `MODEL=` option.

The `MODEL` procedure continues to read and write catalog `MODEL` files, and model files created by previous releases of SAS/ETS continue to work, so you should experience no direct impact from this change.

When the `MODEL=` option is specified in the `PROC MODEL` statement and model definition statements are also given later in the `PROC MODEL` step, the model files are read in first, in the order listed, and the model program specified in the `PROC MODEL` step is appended after the model program read from the `MODEL=` files. The class assigned to a variable, when multiple model files are used, is the last declaration of that variable. For example, if `Y1` was declared endogenous in the model file `M1` and exogenous in the model file `M2`, the following statement causes `Y1` to be declared exogenous.

```
proc model model=(m1 m2);
```

The `INCLUDE` statement can be used to append model code to the current model code. In contrast, when the `MODEL=` option is used in the `RESET` statement, the current model is deleted before the new model is read.

By default, no model file is output if the `PROC MODEL` step performs any `FIT` or `SOLVE` tasks, or if the `MODEL=` option or the `NOSTORE` option is used. However, to ensure compatibility with previous versions of SAS/ETS software, when the `PROC MODEL` step does nothing but compile the model program, no input model file is read, and the `NOSTORE` option is not used, a model file is written. This model file is the default

input file for a later PROC SYSLIN or PROC SIMLIN step. The default output model filename in this case is WORK.MODELS._MODEL_.MODEL.

If FIT statements are used to estimate model parameters, the parameter estimates written to the output model file are the estimates from the last estimation performed for each parameter.

Macro Return Codes (SYSINFO)

PROC MODEL stores a return code in the automatic macro variable SYSINFO upon completion of the PROC MODEL step. In the event any FIT or SOLVE task fails to converge during the completion of a PROC MODEL step the value 1 is stored in the SYSINFO macro variable. Any subsequent SAS step will reset the value of SYSINFO.

Diagnostics and Debugging

PROC MODEL provides several features to aid in finding errors in the model program. These debugging features are not usually needed; most models can be developed without them.

The example model program that follows is used in the following sections to illustrate the diagnostic and debugging capabilities. This example is the estimation of a segmented model.

```

/*--- Diagnostics and Debugging ---*/

*-----Fitting a Segmented Model using MODEL-----*
|      y      | quadratic          plateau          | |
|      y=a+b*x+c*x*x      | y=p      |
|      |      | .....      |
|      |      | :      |
|      |      | :      |
|      |      | :      |
|      |      | :      |
|      |      | :      |
|      |      | :      |
|      +-----X      |
|                  x0      |
| continuity restriction: p=a+b*x0+c*x0**2      |
| smoothness restriction: 0=b+2*c*x0 so x0=-b/(2*c) |
*-----*
title 'QUADRATIC MODEL WITH PLATEAU';
data a;
    input y x @@;
datalines;
.46 1  .47  2 .57  3 .61  4 .62  5 .68  6 .69  7
.78 8  .70  9 .74 10 .77 11 .78 12 .74 13 .80 13
.80 15 .78 16
;

```

```

proc model data=a list xref listcode;
  parms a 0.45 b 0.5 c -0.0025;

  x0 = -.5*b / c;      /* join point */
  if x < x0 then        /* Quadratic part of model */
    y = a + b*x + c*x*x;
  else                  /* Plateau part of model */
    y = a + b*x0 + c*x0*x0;

  fit y;
run;

```

Program Listing

The LIST option produces a listing of the model program. The statements are printed one per line with the original line number and column position of the statement.

The program listing from the example program is shown in [Figure 19.85](#).

Figure 19.85 LIST Output for Segmented Model

QUADRATIC MODEL WITH PLATEAU		
The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	4043:4	x0 = (-0.5 * b) / c;
2	4044:4	if x < x0 then
3	4045:7	PRED.y = a + b * x + c * x * x;
3	4045:7	RESID.y = PRED.y - ACTUAL.y;
3	4045:7	ERROR.y = PRED.y - y;
4	4046:4	else
5	4047:7	PRED.y = a + b * x0 + c * x0 * x0;
5	4047:7	RESID.y = PRED.y - ACTUAL.y;
5	4047:7	ERROR.y = PRED.y - y;

The LIST option also shows the model translations that PROC MODEL performs. LIST output is useful for understanding the code generated by the %AR and the %MA macros.

Cross-Reference

The XREF option produces a cross-reference listing of the variables in the model program. The XREF listing is usually used in conjunction with the LIST option. The XREF listing does not include derivative (@-prefixed) variables. The XREF listing does not include generated assignments to equation variables, PRED., RESID., and ERROR.-prefixed variables, unless the DETAILS option is used.

The cross-reference from the example program is shown in [Figure 19.86](#).

Figure 19.86 XREF Output for Segmented Model

QUADRATIC MODEL WITH PLATEAU			
The MODEL Procedure			
Cross Reference Listing For Program			
Symbol-----	Kind	Type	References (statement)/(line):(col)
a	Var	Num	Used: 3/57202:13 5/57204:13
b	Var	Num	Used: 1/57200:12 3/57202:16 5/57204:16
c	Var	Num	Used: 1/57200:15 3/57202:22 5/57204:23
x0	Var	Num	Assigned: 1/57200:15
			Used: 2/57201:11 5/57204:16
			5/57204:23 5/57204:26
x	Var	Num	Used: 2/57201:11 3/57202:16
			3/57202:22 3/57202:24
PRED.y	Var	Num	Assigned: 3/57202:19 5/57204:20

Compiler Listing

The LISTCODE option lists the model code and derivatives tables produced by the compiler. This listing is useful only for debugging and should not normally be needed.

LISTCODE prints the operator and operands of each operation generated by the compiler for each model program statement. Many of the operands are temporary variables generated by the compiler and given names such as #temp1. When derivatives are taken, the code listing includes the operations generated for the derivatives calculations. The derivatives tables are also listed.

A LISTCODE option prints the transformed equations from the example shown in [Figure 19.87](#) and [Figure 19.88](#).

Figure 19.87 LISTCODE Output for Segmented Model—Statements as Parsed

Derivatives		
WRT-Variable	Object-Variable	Derivative-Variable
a	RESID.y	@RESID.y/@a
b	RESID.y	@RESID.y/@b
c	RESID.y	@RESID.y/@c

Figure 19.87 continued

Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	4043:4	$x0 = (-0.5 * b) / c;$
1	4043:4	$@x0/@b = -0.5 / c;$
1	4043:4	$@x0/@c = -x0 / c;$
2	4044:4	if $x < x0$ then
3	4045:7	$PRED.y = a + b * x + c * x * x;$
3	4045:7	$@PRED.y/@a = 1;$
3	4045:7	$@PRED.y/@b = x;$
3	4045:7	$@PRED.y/@c = x * x;$
3	4045:7	$RESID.y = PRED.y - ACTUAL.y;$
3	4045:7	$@RESID.y/@a = @PRED.y/@a;$
3	4045:7	$@RESID.y/@b = @PRED.y/@b;$
3	4045:7	$@RESID.y/@c = @PRED.y/@c;$
3	4045:7	$ERROR.y = PRED.y - y;$
4	4046:4	else
5	4047:7	$PRED.y = a + b * x0 + c * x0 * x0;$
5	4047:7	$@PRED.y/@a = 1;$
5	4047:7	$@PRED.y/@b = x0 + b * @x0/@b + (c$
		$* @x0/@b * x0 + c * x0 * @x0/@b);$
5	4047:7	$@PRED.y/@c = b * @x0/@c + (x0 + c$
		$* @x0/@c) * x0 + c * x0 * @x0/@c);$
5	4047:7	$RESID.y = PRED.y - ACTUAL.y;$
5	4047:7	$@RESID.y/@a = @PRED.y/@a;$
5	4047:7	$@RESID.y/@b = @PRED.y/@b;$
5	4047:7	$@RESID.y/@c = @PRED.y/@c;$
5	4047:7	$ERROR.y = PRED.y - y;$

Figure 19.88 LISTCODE Output for Segmented Model—Compiled Code

```

1 Stmt ASSIGN      line 4043 column 4.
                   (1) arg=x0
                   argsave=x0
                   Source Text:      x0 = -.5*b / c;
Oper *             at 4043:12 (30,0,2). * : _temp1 <- -.5 b
Oper /             at 4043:15 (31,0,2). / : x0 <- _temp1 c
Oper eeocf         at 4043:15 (18,0,1). eeocf : _DER_ <- _DER_
Oper /             at 4043:15 (31,0,2). / : @x0/@b <- -.5 c
Oper -             at 4043:15 (24,0,1). - : @1dt1_2 <- x0
Oper /             at 4043:15 (31,0,2). / : @x0/@c <- @1dt1_2 c

2 Stmt IF          line 4044 column      ref.st=ASSIGN stmt
                   4. (2) arg=_temp1      number 5 at 4047:7
                   argsave=_temp1
                   Source Text:          if x < x0 then
Oper <             at 4044:11 (36,0,2). < : _temp1 <- x x0

3 Stmt ASSIGN      line 4045 column
                   7. (1) arg=PRED.y
                   argsave=y
                   Source Text:          /* Quadratic part of model
Oper *             at 4045:16 (30,0,2). */ y = a + b*x + c*x*x;
Oper +             at 4045:13 (32,0,2). * : _temp1 <- b x
Oper *             at 4045:22 (30,0,2). + : _temp2 <- a _temp1
Oper *             at 4045:24 (30,0,2). * : _temp3 <- c x
Oper *             at 4045:19 (32,0,2). * : _temp4 <- _temp3 x
Oper +             at 4045:19 (32,0,2). + : PRED.y <- _temp2 _temp4
Oper eeocf         at 4045:19 (18,0,1). eeocf : _DER_ <- _DER_
Oper =             at 4045:19 (1,0,1). = : @PRED.y/@a <- 1
Oper =             at 4045:19 (1,0,1). = : @PRED.y/@b <- x
Oper *             at 4045:24 (30,0,2). * : @1dt1_1 <- x x
Oper =             at 4045:19 (1,0,1). = : @PRED.y/@c <- @1dt1_1

3 Stmt Assign      line 4045 column
                   7. (1) arg=RESID.y
                   argsave=y
Oper -             at 4045:7 (33,0,2). - : RESID.y <- PRED.y ACTUAL.y
Oper eeocf         at 4045:7 (18,0,1). eeocf : _DER_ <- _DER_
Oper =             at 4045:7 (1,0,1). = : @RESID.y/@a <- @PRED.y/@a
Oper =             at 4045:7 (1,0,1). = : @RESID.y/@b <- @PRED.y/@b
Oper =             at 4045:7 (1,0,1). = : @RESID.y/@c <- @PRED.y/@c

3 Stmt Assign      line 4045 column
                   7. (1) arg=ERROR.y
                   argsave=y
Oper -             at 4045:7 (33,0,2). - : ERROR.y <- PRED.y y

4 Stmt ELSE        line 4046 column      ref.st=FIT stmt number 5 at 4049:4
                   4. (9)

```

Figure 19.88 *continued*

	Source Text:	else
5 Stmt ASSIGN	line 4047 column	
	7. (1) arg=PRED.y	
	argsave=y	
	Source Text:	/* Plateau part of model */
		y = a + b*x0 + c*x0*x0;
Oper *	at 4047:16 (30,0,2).	* : _temp1 <- b x0
Oper +	at 4047:13 (32,0,2).	+ : _temp2 <- a _temp1
Oper *	at 4047:23 (30,0,2).	* : _temp3 <- c x0
Oper *	at 4047:26 (30,0,2).	* : _temp4 <- _temp3 x0
Oper +	at 4047:20 (32,0,2).	+ : PRED.y <- _temp2 _temp4
Oper eeocf	at 4047:20 (18,0,1).	eeocf : _DER_ <- _DER_
Oper =	at 4047:20 (1,0,1).	= : @PRED.y/@a <- 1
Oper *	at 4047:16 (30,0,2).	* : @1dt1_1 <- b @x0/@b
Oper +	at 4047:16 (32,0,2).	+ : @1dt1_2 <- x0 @1dt1_1
Oper *	at 4047:23 (30,0,2).	* : @1dt1_3 <- c @x0/@b
Oper *	at 4047:26 (30,0,2).	* : @1dt1_4 <- @1dt1_3 x0
Oper *	at 4047:26 (30,0,2).	* : @1dt1_5 <- _temp3 @x0/@b
Oper +	at 4047:26 (32,0,2).	+ : @1dt1_6 <- @1dt1_4 @1dt1_5
Oper +	at 4047:20 (32,0,2).	+ : @PRED.y/@b <- @1dt1_2 @1dt1_6
Oper *	at 4047:16 (30,0,2).	* : @1dt1_8 <- b @x0/@c
Oper *	at 4047:23 (30,0,2).	* : @1dt1_9 <- c @x0/@c
Oper +	at 4047:23 (32,0,2).	+ : @1dt1_10 <- x0 @1dt1_9
Oper *	at 4047:26 (30,0,2).	* : @1dt1_11 <- @1dt1_10 x0
Oper *	at 4047:26 (30,0,2).	* : @1dt1_12 <- _temp3 @x0/@c
Oper +	at 4047:26 (32,0,2).	+ : @1dt1_13 <- @1dt1_11 @1dt1_12
Oper +	at 4047:20 (32,0,2).	+ : @PRED.y/@c <- @1dt1_8 @1dt1_13
5 Stmt Assign	line 4047 column	
	7. (1) arg=RESID.y	
	argsave=y	
Oper -	at 4047:7 (33,0,2).	- : RESID.y <- PRED.y ACTUAL.y
Oper eeocf	at 4047:7 (18,0,1).	eeocf : _DER_ <- _DER_
Oper =	at 4047:7 (1,0,1).	= : @RESID.y/@a <- @PRED.y/@a
Oper =	at 4047:7 (1,0,1).	= : @RESID.y/@b <- @PRED.y/@b
Oper =	at 4047:7 (1,0,1).	= : @RESID.y/@c <- @PRED.y/@c
5 Stmt Assign	line 4047 column	
	7. (1) arg=ERROR.y	
	argsave=y	
Oper -	at 4047:7 (33,0,2).	- : ERROR.y <- PRED.y y

Analyzing the Structure of Large Models

PROC MODEL provides several features to aid in analyzing the structure of the model program. These features summarize properties of the model in various forms.

The following Klein's model program is used to introduce the LISTDEP, BLOCK, and GRAPH options.

```

proc model out=m data=klein listdep graph block;
  endogenous c p w i x wsum k y;
  exogenous wp g t year;
  parms c0-c3 i0-i3 w0-w3;
  a: c = c0 + c1 * p + c2 * lag(p) + c3 * wsum;
  b: i = i0 + i1 * p + i2 * lag(p) + i3 * lag(k);
  c: w = w0 + w1 * x + w2 * lag(x) + w3 * year;
  x = c + i + g;
  y = c + i + g-t;
  p = x-w-t;
  k = lag(k) + i;
  wsum = w + wp;
  id year;
run;

```

Dependency List

The LISTDEP option produces a dependency list for each variable in the model program. For each variable, a list of variables that depend on it and a list of variables it depends on is given. The dependency list produced by the example program is shown in [Figure 19.89](#).

Figure 19.89 A Portion of the LISTDEP Output for Klein's Model

The MODEL Procedure	
Dependency Listing For Program	
Symbol-----	Dependencies
c	Current values affect: RESID.c ERROR.c PRED.x RESID.x ERROR.x PRED.y RESID.y ERROR.y
p	Current values affect: PRED.c RESID.c ERROR.c PRED.i RESID.i ERROR.i RESID.p ERROR.p Lagged values affect: PRED.c PRED.i
w	Current values affect: RESID.w ERROR.w PRED.p RESID.p ERROR.p PRED.wsum RESID.wsum ERROR.wsum
i	Current values affect: RESID.i ERROR.i PRED.x RESID.x ERROR.x PRED.y RESID.y ERROR.y PRED.k RESID.k ERROR.k
x	Current values affect: PRED.w RESID.w ERROR.w RESID.x ERROR.x PRED.p RESID.p ERROR.p Lagged values affect: PRED.w
wsum	Current values affect: PRED.c RESID.c ERROR.c RESID.wsum ERROR.wsum
k	Current values affect: RESID.k ERROR.k Lagged values affect: PRED.i RESID.i ERROR.i PRED.k
y	Current values affect: RESID.y ERROR.y
wp	Current values affect: PRED.wsum RESID.wsum ERROR.wsum
g	Current values affect: PRED.x RESID.x ERROR.x PRED.y RESID.y ERROR.y
t	Current values affect: PRED.y RESID.y ERROR.y PRED.p RESID.p ERROR.p
year	Current values affect: PRED.w RESID.w ERROR.w
c0	Current values affect: PRED.c RESID.c ERROR.c
c1	Current values affect: PRED.c RESID.c ERROR.c
c2	Current values affect: PRED.c RESID.c ERROR.c
c3	Current values affect: PRED.c RESID.c ERROR.c
i0	Current values affect: PRED.i RESID.i ERROR.i
i1	Current values affect: PRED.i RESID.i ERROR.i
i2	Current values affect: PRED.i RESID.i ERROR.i

Figure 19.89 *continued*

The MODEL Procedure	
Dependency Listing For Program	
Symbol-----	Dependencies
i3	Current values affect: PRED.i RESID.i ERROR.i
w0	Current values affect: PRED.w RESID.w ERROR.w
w1	Current values affect: PRED.w RESID.w ERROR.w
w2	Current values affect: PRED.w RESID.w ERROR.w
w3	Current values affect: PRED.w RESID.w ERROR.w
PRED.c	Depends on current values of: p wsum c0 c1 c2 c3 Depends on lagged values of: p Current values affect: RESID.c ERROR.c
RESID.c	Depends on current values of: PRED.c c p wsum c0 c1 c2 c3
ERROR.c	Depends on current values of: PRED.c c p wsum c0 c1 c2 c3
ACTUAL.c	Current values affect: RESID.c ERROR.c PRED.x RESID.x ERROR.x PRED.y RESID.y ERROR.y
PRED.i	Depends on current values of: p i0 i1 i2 i3 Depends on lagged values of: p k Current values affect: RESID.i ERROR.i
RESID.i	Depends on current values of: PRED.i p i i0 i1 i2 i3
ERROR.i	Depends on lagged values of: k Depends on current values of: PRED.i p i i0 i1 i2 i3
ACTUAL.i	Depends on lagged values of: k Current values affect: RESID.i ERROR.i PRED.x RESID.x ERROR.x PRED.y RESID.y ERROR.y PRED.k RESID.k ERROR.k
PRED.w	Depends on current values of: x year w0 w1 w2 w3 Depends on lagged values of: x Current values affect: RESID.w ERROR.w
RESID.w	Depends on current values of: PRED.w w x year w0 w1 w2 w3
ERROR.w	Depends on current values of: PRED.w w x year w0 w1 w2 w3
ACTUAL.w	Current values affect: RESID.w ERROR.w PRED.p RESID.p ERROR.p PRED.wsum RESID.wsum ERROR.wsum

Figure 19.89 *continued*

The MODEL Procedure	
Dependency Listing For Program	
Symbol-----	Dependencies
PRED.x	Depends on current values of: c i g Current values affect: RESID.x ERROR.x
RESID.x	Depends on current values of: PRED.x c i x g
ERROR.x	Depends on current values of: PRED.x c i x g
ACTUAL.x	Current values affect: PRED.w RESID.w ERROR.w RESID.x ERROR.x PRED.p RESID.p ERROR.p Lagged values affect: PRED.w
PRED.y	Depends on current values of: c i g t Current values affect: RESID.y ERROR.y
RESID.y	Depends on current values of: PRED.y c i y g t
ERROR.y	Depends on current values of: PRED.y c i y g t
ACTUAL.y	Current values affect: RESID.y ERROR.y
PRED.p	Depends on current values of: w x t Current values affect: RESID.p ERROR.p
RESID.p	Depends on current values of: PRED.p p w x t
ERROR.p	Depends on current values of: PRED.p p w x t
ACTUAL.p	Current values affect: PRED.c RESID.c ERROR.c PRED.i RESID.i ERROR.i RESID.p ERROR.p Lagged values affect: PRED.c PRED.i
PRED.k	Depends on current values of: i Depends on lagged values of: k Current values affect: RESID.k ERROR.k
RESID.k	Depends on current values of: PRED.k i k
ERROR.k	Depends on current values of: PRED.k i k
ACTUAL.k	Current values affect: RESID.k ERROR.k Lagged values affect: PRED.i RESID.i ERROR.i PRED.k
PRED.wsum	Depends on current values of: w wp Current values affect: RESID.wsum ERROR.wsum
RESID.wsum	Depends on current values of: PRED.wsum w wsum wp
ERROR.wsum	Depends on current values of: PRED.wsum w wsum wp
ACTUAL.wsum	Current values affect: PRED.c RESID.c ERROR.c RESID.wsum ERROR.wsum

BLOCK Listing

The BLOCK option prints an analysis of the program variables based on the assignments in the model program. The output produced by the example is shown in [Figure 19.90](#).

Figure 19.90 The BLOCK Output for Klein's Model

```

                                The MODEL Procedure
                                Model Structure Analysis
                                (Based on Assignments to Endogenous Model Variables)

                                Exogenous Variables      wp g t year
                                Endogenous Variables     c p w i x wsum k y

                                Block Structure of the System

                                Block 1      c p w i x wsum

                                Dependency Structure of the System

                                Block 1      Depends On All_Exogenous
                                k           Depends On Block 1 All_Exogenous
                                y           Depends On Block 1 All_Exogenous

```

One use for the block output is to put a model in recursive form. Simulations of the model can be done with the SEIDEL method, which is efficient if the model is recursive and if the equations are in recursive order. By examining the block output, you can determine how to reorder the model equations for the most efficient simulation.

Adjacency Graph

The GRAPH option displays the same information as the BLOCK option with the addition of an adjacency graph. An X in a column in an adjacency graph indicates that the variable associated with the row depends on the variable associated with the column. The output produced by the example is shown in [Figure 19.91](#).

The first and last graphs are straightforward. The middle graph represents the dependencies of the nonexogenous variables after transitive closure has been performed (that is, A depends on B, and B depends on C, so A depends on C). The preceding transitive closure matrix indicates that K and Y do not directly or indirectly depend on each other.

Figure 19.91 The GRAPH Output for Klein's Model

```

Adjacency Matrix for Graph of System
                                     w      y
                                     s      e
                                     u      w      a
Variable      c p w i x m k y p g t r

c              . . . . .
p              . X X . X . . . . . X .
w              . . X . X . . . . . X
i              . X . X . . . . . . .
x              X . . X X . . . . . X .
wsum           . . X . . X . . X . . .
k              . . . X . . . X . . . .
y              X . . X . . . X . X X .
wp             * . . . . . . . X . . .
g              * . . . . . . . . X . .
t              * . . . . . . . . . X .
year           * . . . . . . . . . . X

(Note: * = Exogenous Variable.)

Transitive Closure Matrix of Sorted System
                                     w
                                     s
                                     u
Block      Variable      c p w i x m k y

1      c      X X X X X X . .
1      p      X X X X X X . .
1      w      X X X X X X . .
1      i      X X X X X X . .
1      x      X X X X X X . .
1      wsum    X X X X X X . .
        k      X X X X X X X .
        y      X X X X X X . X

```

Figure 19.91 *continued*

		Adjacency Matrix for Graph of System Including Lagged Impacts											
		w				y				e			
		s				u				w			
		a				p				g			
Block	Variable	c	p	w	i	x	m	k	y	p	g	t	r
										*	*	*	*
1	c	X	L	.	.	.	X
1	p	.	X	X	.	X	X	.
1	w	.	.	X	.	L	X
1	i	.	L	.	X	.	.	L
1	x	X	.	.	X	X	X	.	.
1	wsum	.	.	X	.	.	X	.	.	X	.	.	.
	k	.	.	.	X	.	.	L
	y	X	.	.	X	.	.	.	X	.	X	X	.
	wp	*	X	.	.	.
	g	*	X	.	.
	t	*	X	.
	year	*	X

(Note: * = Exogenous Variable.)

Examples: MODEL Procedure

Example 19.1: OLS Single Nonlinear Equation

This example illustrates the use of the MODEL procedure for nonlinear ordinary least squares (OLS) regression. The model is a logistic growth curve for the population of the United States. The data is the population in millions recorded at ten-year intervals starting in 1790 and ending in 2000. For an explanation of the starting values given by the START= option, see the section “[Troubleshooting Convergence Problems](#)” on page 1109. Portions of the output from the following statements are shown in [Output 19.1.1](#) through [Output 19.1.3](#).

```

title 'Logistic Growth Curve Model of U.S. Population';
data uspop;
  input pop :6.3 @@;
  retain year 1780;
  year=year+10;
  label pop='U.S. Population in Millions';
  datalines;
3929 5308 7239 9638 12866 17069 23191 31443 39818 50155
62947 75994 91972 105710 122775 131669 151325 179323 203211
226542 248710
;

```

```

proc model data=uspop;
  label a = 'Maximum Population'
        b = 'Location Parameter'
        c = 'Initial Growth Rate';
  pop = a / ( 1 + exp( b - c * (year-1790) ) );
  fit pop start=(a 1000 b 5.5 c .02) / out=resid outresid;
run;

```

Output 19.1.1 Logistic Growth Curve Model Summary

Logistic Growth Curve Model of U.S. Population	
The MODEL Procedure	
Model Summary	
Model Variables	1
Parameters	3
Equations	1
Number of Statements	1
Model Variables	pop
Parameters(Value)	a(1000) b(5.5) c(0.02)
Equations	pop
The Equation to Estimate is	
pop = F(a, b, c)	

Output 19.1.2 Logistic Growth Curve Estimation Summary

Logistic Growth Curve Model of U.S. Population	
The MODEL Procedure	
OLS Estimation Summary	
Data Set Options	
DATA=	USPOP
OUT=	RESID
Minimization Summary	
Parameters Estimated	3
Method	Gauss
Iterations	7
Subiterations	6
Average Subiterations	0.857143

Output 19.1.2 *continued*

Final Convergence Criteria	
R	0.00068
PPC (a)	0.000145
RPC (a)	0.001507
Object	0.000065
Trace (S)	19.20198
Objective Value	16.45884
Observations Processed	
Read	21
Solved	21

Output 19.1.3 Logistic Growth Curve Estimates

Logistic Growth Curve Model of U.S. Population						
The MODEL Procedure						
Nonlinear OLS Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
pop	3	18	345.6	19.2020	0.9972	0.9969
Nonlinear OLS Parameter Estimates						
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label	
a	387.9307	30.0404	12.91	<.0001	Maximum Population	
b	3.990385	0.0695	57.44	<.0001	Location Parameter	
c	0.022703	0.00107	21.22	<.0001	Initial Growth Rate	

The adjusted R^2 value indicates the model fits the data well. There are only 21 observations and the model is nonlinear, so significance tests on the parameters are only approximate. The significance tests and associated approximate probabilities indicate that all the parameters are significantly different from 0.

The FIT statement included the options OUT=RESID and OUTRESID so that the residuals from the estimation are saved to the data set RESID. The residuals are plotted to check for heteroscedasticity by using PROC SGPLOT as follows.

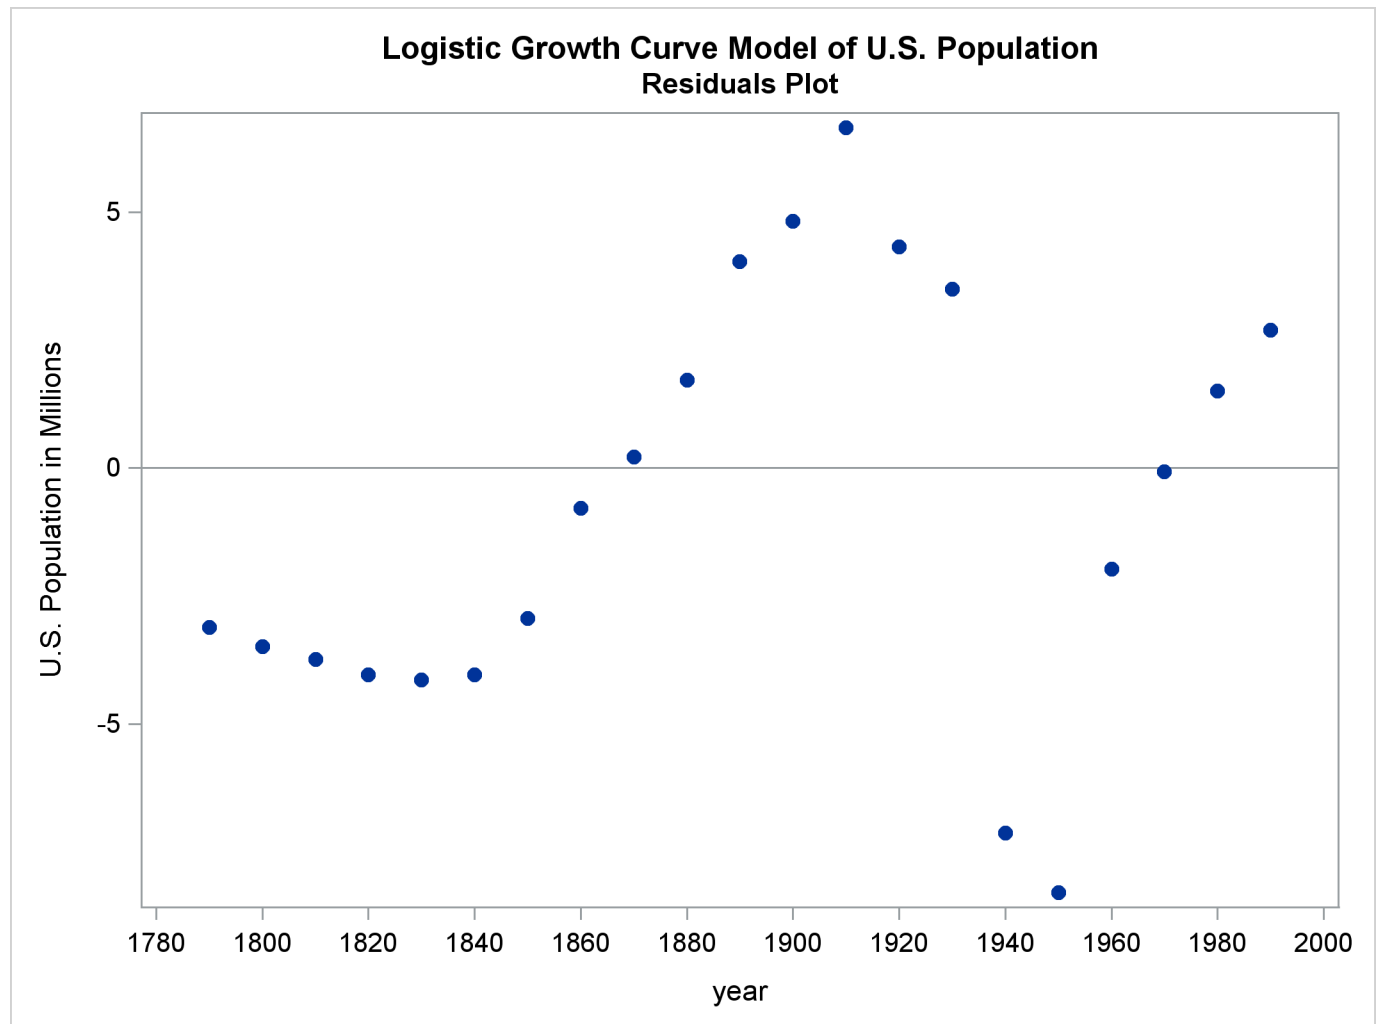
```

title2 "Residuals Plot";
proc sgplot data=resid;
  refline 0;
  scatter x=year y=pop / markerattrs=(symbol=circlefilled);
  xaxis values=(1780 to 2000 by 20);
run;

```

The plot is shown in [Output 19.1.4](#).

Output 19.1.4 Residual for Population Model (Actual–Predicted)



The residuals do not appear to be independent, and the model could be modified to explain the remaining nonrandom errors.

Example 19.2: A Consumer Demand Model

This example shows the estimation of a system of nonlinear consumer demand equations based on the translog functional form by using seemingly unrelated regression (SUR). Expenditure shares and corresponding normalized prices are given for three goods.

Since the shares add up to one, the system is singular; therefore, one equation is omitted from the estimation process. The choice of which equation to omit is arbitrary. The nonlinear system is first estimated in unrestricted form by the following statements:

```

title1 'Consumer Demand--Translog Functional Form';
title2 'Asymmetric Model';

proc model data=tlog1;
  endogenous share1 share2;
  parms a1 a2 b11 b12 b13 b21 b22 b23 b31 b32 b33;

  bm1 = b11 + b21 + b31;
  bm2 = b12 + b22 + b32;
  bm3 = b13 + b23 + b33;
  lp1 = log(p1);
  lp2 = log(p2);
  lp3 = log(p3);
  share1 = ( a1 + b11 * lp1 + b12 * lp2 + b13 * lp3 ) /
            ( -1 + bm1 * lp1 + bm2 * lp2 + bm3 * lp3 );
  share2 = ( a2 + b21 * lp1 + b22 * lp2 + b23 * lp3 ) /
            ( -1 + bm1 * lp1 + bm2 * lp2 + bm3 * lp3 );

  fit share1 share2
    start=( a1 -.14 a2 -.45 b11 .03 b12 .47 b22 .98 b31 .20
            b32 1.11 b33 .71 ) / outsused=smatrix sur;
run;

```

A portion of the printed output produced by this example is shown in [Output 19.2.1](#) through [Output 19.2.3](#).

Output 19.2.1 Translog Demand Model Summary

Consumer Demand--Translog Functional Form	
Asymmetric Model	
The MODEL Procedure	
Model Summary	
Model Variables	2
Endogenous	2
Parameters	11
Equations	2
Number of Statements	8
Model Variables	share1 share2
Parameters(Value)	a1(-0.14) a2(-0.45) b11(0.03) b12(0.47) b13 b21 b22(0.98) b23 b31(0.2) b32(1.11) b33(0.71)
Equations	share1 share2
The 2 Equations to Estimate	
share1 =	F(a1, b11, b12, b13, b21, b22, b23, b31, b32, b33)
share2 =	F(a2, b11, b12, b13, b21, b22, b23, b31, b32, b33)

Output 19.2.2 Estimation Summary for the Unrestricted Model

NOTE: At SUR Iteration 2 CONVERGE=0.001 Criteria Met.	
Consumer Demand--Translog Functional Form Asymmetric Model	
The MODEL Procedure SUR Estimation Summary	
Data Set Options	
DATA=	TLOG1
OUTSUDED=	SMATRIX
Minimization Summary	
Parameters Estimated	11
Method	Gauss
Iterations	2
Final Convergence Criteria	
R	0.00016
PPC (b11)	0.00116
RPC (b11)	0.012106
Object	2.921E-6
Trace (S)	0.000078
Objective Value	1.749312
Observations Processed	
Read	44
Solved	44

Output 19.2.3 Estimation Results for the Unrestricted Model

Consumer Demand--Translog Functional Form Asymmetric Model							
The MODEL Procedure							
Nonlinear SUR Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
share1	5.5	38.5	0.00166	0.000043	0.00656	0.8067	0.7841
share2	5.5	38.5	0.00135	0.000035	0.00592	0.9445	0.9380

Output 19.2.3 *continued*

Nonlinear SUR Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
a1	-0.14881	0.00225	-66.08	<.0001
a2	-0.45776	0.00297	-154.29	<.0001
b11	0.048382	0.0498	0.97	0.3379
b12	0.43655	0.0502	8.70	<.0001
b13	0.248588	0.0516	4.82	<.0001
b21	0.586326	0.2089	2.81	0.0079
b22	0.759776	0.2565	2.96	0.0052
b23	1.303821	0.2328	5.60	<.0001
b31	0.297808	0.1504	1.98	0.0550
b32	0.961551	0.1633	5.89	<.0001
b33	0.8291	0.1556	5.33	<.0001
Number of Observations		Statistics for System		
Used	44	Objective	1.7493	
Missing	0	Objective*N	76.9697	

The model is then estimated under the restriction of symmetry ($b_{ij} = b_{ji}$), as shown in the following statements:

```

title2 'Symmetric Model';
proc model data=tlog1;
  var share1 share2 p1 p2 p3;
  parms a1 a2 b11 b12 b22 b31 b32 b33;
  bm1 = b11 + b12 + b31;
  bm2 = b12 + b22 + b32;
  bm3 = b31 + b32 + b33;
  lp1 = log(p1);
  lp2 = log(p2);
  lp3 = log(p3);
  share1 = ( a1 + b11 * lp1 + b12 * lp2 + b31 * lp3 ) /
    ( -1 + bm1 * lp1 + bm2 * lp2 + bm3 * lp3 );
  share2 = ( a2 + b12 * lp1 + b22 * lp2 + b32 * lp3 ) /
    ( -1 + bm1 * lp1 + bm2 * lp2 + bm3 * lp3 );
  fit share1 share2
    start=( a1 -.14 a2 -.45 b11 .03 b12 .47 b22 .98 b31 .20
      b32 1.11 b33 .71 ) / sdata=smatrix sur;
run;

```

A portion of the printed output produced for the symmetry restricted model is shown in [Output 19.2.4](#) and [Output 19.2.5](#).

Output 19.2.4 Model Summary from the Restricted Model

```

Consumer Demand--Translog Functional Form
Symmetric Model

The MODEL Procedure

The 2 Equations to Estimate

share1 = F(a1, b11, b12, b22, b31, b32, b33)
share2 = F(a2, b11, b12, b22, b31, b32, b33)

```

Output 19.2.5 Estimation Results for the Restricted Model

```

Consumer Demand--Translog Functional Form
Symmetric Model

The MODEL Procedure

Nonlinear SUR Summary of Residual Errors

Equation      DF      DF      SSE      MSE      Root MSE      R-Square      Adj
               Model    Error                               R-Sq
share1         4       40    0.00166    0.000041    0.00644       0.8066       0.7920
share2         4       40    0.00139    0.000035    0.00590       0.9428       0.9385

Nonlinear SUR Parameter Estimates

Parameter      Estimate      Approx      t Value      Approx
               Std Err                               Pr > |t|
a1             -0.14684     0.00135     -108.99      <.0001
a2             -0.4597     0.00167     -275.34      <.0001
b11             0.02886     0.00741       3.89       0.0004
b12             0.467827    0.0115      40.57      <.0001
b22             0.970079    0.0177      54.87      <.0001
b31             0.208143    0.00614      33.88      <.0001
b32             1.102415    0.0127      86.51      <.0001
b33             0.694245    0.0168      41.38      <.0001

Number of Observations      Statistics for System
Used                        44      Objective      1.7820
Missing                    0      Objective*N     78.4097

```

Hypothesis testing requires that the **S** matrix from the unrestricted model be imposed on the restricted model, as explained in the section “[Tests on Parameters](#)” on page 1156. The **S** matrix saved in the data set **SMATRIX** is requested by the **SDATA=** option.

A chi-square test is used to see if the hypothesis of symmetry is accepted or rejected. $(Oc - Ou)$ has a chi-square distribution asymptotically, where Oc is the constrained **OBJECTIVE*N** and Ou is the unconstrained **OBJECTIVE*N**. The degrees of freedom is equal to the difference in the number of free parameters in the two models.

In this example, O_u is 76.9697 and O_c is 78.4097, resulting in a difference of 1.44 with 3 degrees of freedom. You can obtain the probability value by using the following statements:

```
data _null_;
  /* probchi( reduced-full, n-restrictions )*/
  p = 1-probchi( 1.44, 3 );
  put p=;
run;
```

The output from this DATA step run is $p = 0.6961858724$. With this p -value you cannot reject the hypothesis of symmetry. This test is asymptotically valid.

Example 19.3: Vector AR(1) Estimation

This example shows the estimation of a two-variable vector AR(1) error process for the Grunfeld model (Grunfeld and Griliches 1960) by using the %AR macro. First, the full model is estimated. Second, the model is estimated with the restriction that the errors are univariate AR(1) instead of a vector process. The following statements produce [Output 19.3.1](#) through [Output 19.3.5](#).

```
data grunfeld;
  input year gei gef gec whi whf whc;
  label gei = 'Gross Investment GE'
        gec = 'Capital Stock Lagged GE'
        gef = 'Value of Outstanding Shares GE Lagged'
        whi = 'Gross Investment WH'
        whc = 'Capital Stock Lagged WH'
        whf = 'Value of Outstanding Shares Lagged WH';
datalines;
1935      33.1      1170.6      97.8      12.93      191.5      1.8
1936      45.0      2015.8     104.4      25.90      516.0       .8

... more lines ...

title1 'Example of Vector AR(1) Error Process Using Grunfeld's Model';
/* Note: GE stands for General Electric
        WH stands for Westinghouse      */

proc model outmodel=grunmod;
  var gei whi gef gec whf whc;
  parms ge_int ge_f ge_c wh_int wh_f wh_c;
  label ge_int = 'GE Intercept'
        ge_f   = 'GE Lagged Share Value Coef'
        ge_c   = 'GE Lagged Capital Stock Coef'
        wh_int = 'WH Intercept'
        wh_f   = 'WH Lagged Share Value Coef'
        wh_c   = 'WH Lagged Capital Stock Coef';
  gei = ge_int + ge_f * gef + ge_c * gec;
  whi = wh_int + wh_f * whf + wh_c * whc;
run;
```

The preceding PROC MODEL step defines the structural model and stores it in the model file named GRUNMOD.

The following PROC MODEL step reads in the model, adds the vector autoregressive terms using %AR, and requests SUR estimation by using the FIT statement.

```
title2 'With Unrestricted Vector AR(1) Error Process';

proc model data=grunfeld model=grunmod;
  %ar( ar, 1, gei whi )
  fit gei whi / sur;
run;
```

The final PROC MODEL step estimates the restricted model, as shown in the following statements:

```
title2 'With restricted AR(1) Error Process';

proc model data=grunfeld model=grunmod;
  %ar( gei, 1 )
  %ar( whi, 1)
  fit gei whi / sur;
run;
```

Output 19.3.1 Model Summary for the Unrestricted Model

Example of Vector AR(1) Error Process Using Grunfeld's Model With Unrestricted Vector AR(1) Error Process	
The MODEL Procedure	
Model Summary	
Model Variables	6
Parameters	10
Equations	2
Number of Statements	7
Model Variables	gei whi gef gec whf whc
Parameters(Value)	ge_int ge_f ge_c wh_int wh_f wh_c ar_l1_1_1(0) ar_l1_1_2(0) ar_l1_2_1(0) ar_l1_2_2(0)
Equations	gei whi
The 2 Equations to Estimate	
gei =	F(ge_int, ge_f, ge_c, wh_int, wh_f, wh_c, ar_l1_1_1, ar_l1_1_2)
whi =	F(ge_int, ge_f, ge_c, wh_int, wh_f, wh_c, ar_l1_2_1, ar_l1_2_2)
NOTE: At SUR Iteration 9 CONVERGE=0.001 Criteria Met.	

Output 19.3.2 Estimation Summary for the Unrestricted Model

Example of Vector AR(1) Error Process Using Grunfeld's Model With Unrestricted Vector AR(1) Error Process	
The MODEL Procedure	
SUR Estimation Summary	
Data Set Options	
DATA=	GRUNFELD
Minimization Summary	
Parameters Estimated	10
Method	Gauss
Iterations	9
Final Convergence Criteria	
R	0.000609
PPC(wh_int)	0.002798
RPC(wh_int)	0.005411
Object	6.243E-7
Trace(S)	720.2454
Objective Value	1.374476
Observations Processed	
Read	20
Solved	20

Output 19.3.3 Estimation Results for the Unrestricted Model

Example of Vector AR(1) Error Process Using Grunfeld's Model With Unrestricted Vector AR(1) Error Process						
The MODEL Procedure						
Nonlinear SUR Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
gei	5	15	9374.5	625.0	0.7910	0.7352
whi	5	15	1429.2	95.2807	0.7940	0.7391

Output 19.3.3 *continued*

Nonlinear SUR Parameter Estimates					
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label
ge_int	-42.2858	30.5284	-1.39	0.1863	GE Intercept
ge_f	0.049894	0.0153	3.27	0.0051	GE Lagged Share Value Coef
ge_c	0.123946	0.0458	2.70	0.0163	GE Lagged Capital Stock Coef
wh_int	-4.68931	8.9678	-0.52	0.6087	WH Intercept
wh_f	0.068979	0.0182	3.80	0.0018	WH Lagged Share Value Coef
wh_c	0.019308	0.0754	0.26	0.8015	WH Lagged Capital Stock Coef
ar_l1_1_1	0.990902	0.3923	2.53	0.0233	AR(ar) gei: LAG1 parameter for gei
ar_l1_1_2	-1.56252	1.0882	-1.44	0.1716	AR(ar) gei: LAG1 parameter for whi
ar_l1_2_1	0.244161	0.1783	1.37	0.1910	AR(ar) whi: LAG1 parameter for gei
ar_l1_2_2	-0.23864	0.4957	-0.48	0.6372	AR(ar) whi: LAG1 parameter for whi

Output 19.3.4 Model Summary for the Restricted Model

Example of Vector AR(1) Error Process Using Grunfeld's Model With restricted AR(1) Error Process	
The MODEL Procedure	
Model Summary	
Model Variables	6
Parameters	8
Equations	2
Number of Statements	7
Model Variables	gei whi gef gec whf whc
Parameters(Value)	ge_int ge_f ge_c wh_int wh_f wh_c gei_l1(0) whi_l1(0)
Equations	gei whi

Output 19.3.5 Estimation Results for the Restricted Model

Example of Vector AR(1) Error Process Using Grunfeld's Model With restricted AR(1) Error Process						
The MODEL Procedure						
Nonlinear SUR Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
gei	4	16	10558.8	659.9	0.7646	0.7204
whi	4	16	1669.8	104.4	0.7594	0.7142
Nonlinear SUR Parameter Estimates						
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label	
ge_int	-30.1239	29.7227	-1.01	0.3259	GE Intercept	
ge_f	0.043527	0.0149	2.93	0.0099	GE Lagged Share Value Coef	
ge_c	0.119206	0.0423	2.82	0.0124	GE Lagged Capital Stock Coef	
wh_int	3.112671	9.2765	0.34	0.7416	WH Intercept	
wh_f	0.053932	0.0154	3.50	0.0029	WH Lagged Share Value Coef	
wh_c	0.038246	0.0805	0.48	0.6410	WH Lagged Capital Stock Coef	
gei_l1	0.482397	0.2149	2.24	0.0393	AR(gei) gei lag1 parameter	
whi_l1	0.455711	0.2424	1.88	0.0784	AR(whi) whi lag1 parameter	

Example 19.4: MA(1) Estimation

This example estimates parameters for an MA(1) error process for the Grunfeld model, using both the unconditional least squares and the maximum likelihood methods. The ARIMA procedure estimates for Westinghouse equation are shown for comparison. The output of the following statements is summarized in [Output 19.4.1](#):

```
proc model outmodel=grunmod;
  var gei whi gef gec whf whc;
  parms ge_int ge_f ge_c wh_int wh_f wh_c;
  label ge_int = 'GE Intercept'
        ge_f   = 'GE Lagged Share Value Coef'
        ge_c   = 'GE Lagged Capital Stock Coef'
        wh_int = 'WH Intercept'
        wh_f   = 'WH Lagged Share Value Coef'
        wh_c   = 'WH Lagged Capital Stock Coef';
```

```

    gei = ge_int + ge_f * gef + ge_c * gec;
    whi = wh_int + wh_f * whf + wh_c * whc;
run;

title1 'Example of MA(1) Error Process Using Grunfeld's Model';
title2 'MA(1) Error Process Using Unconditional Least Squares';

proc model data=grunfeld model=grunmod;
    %ma(gei,1, m=uls);
    %ma(whi,1, m=uls);
    fit whi gei start=( gei_m1 0.8 -0.8) / startiter=2;
run;

```

Output 19.4.1 PROC MODEL Results by Using ULS Estimation

Example of MA(1) Error Process Using Grunfeld's Model						
MA(1) Error Process Using Unconditional Least Squares						
The MODEL Procedure						
Nonlinear OLS Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
whi	4	16	1874.0	117.1	0.7299	0.6793
resid.whi		16	1295.6	80.9754		
gei	4	16	13835.0	864.7	0.6915	0.6337
resid.gei		16	7646.2	477.9		
Nonlinear OLS Parameter Estimates						
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label	
ge_int	-26.839	32.0908	-0.84	0.4153	GE Intercept	
ge_f	0.038226	0.0150	2.54	0.0217	GE Lagged Share Value Coef	
ge_c	0.137099	0.0352	3.90	0.0013	GE Lagged Capital Stock Coef	
wh_int	3.680835	9.5448	0.39	0.7048	WH Intercept	
wh_f	0.049156	0.0172	2.85	0.0115	WH Lagged Share Value Coef	
wh_c	0.067271	0.0708	0.95	0.3559	WH Lagged Capital Stock Coef	
gei_m1	-0.87615	0.1614	-5.43	<.0001	MA(gei) gei lag1 parameter	
whi_m1	-0.75001	0.2368	-3.17	0.0060	MA(whi) whi lag1 parameter	

The estimation summary from the following PROC ARIMA statements is shown in [Output 19.4.2](#).

```

title2 'PROC ARIMA Using Unconditional Least Squares';

proc arima data=grunfeld;

```



```

identify var=whi cross=(whf whc ) noprint;
estimate q=1 input=(whf whc) method=uls maxiter=40;
run;

```

Output 19.4.2 PROC ARIMA Results by Using ULS Estimation

Example of MA(1) Error Process Using Grunfeld's Model PROC ARIMA Using Unconditional Least Squares							
The ARIMA Procedure							
Unconditional Least Squares Estimation							
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift
MU	3.68608	9.54425	0.39	0.7044	0	whi	0
MA1,1	-0.75005	0.23704	-3.16	0.0060	1	whi	0
NUM1	0.04914	0.01723	2.85	0.0115	0	whf	0
NUM2	0.06731	0.07077	0.95	0.3557	0	whc	0
Constant Estimate				3.686077			
Variance Estimate				80.97535			
Std Error Estimate				8.998631			
AIC				149.0044			
SBC				152.9873			
Number of Residuals				20			

The model stored in [Example 19.3](#) is read in by using the MODEL= option and the moving-average terms are added using the %MA macro.

The MA(1) model using maximum likelihood is estimated by using the following statements:

```

title2 'MA(1) Error Process Using Maximum Likelihood ';

proc model data=grunfeld model=grunmod;
  %ma(gei,1, m=ml);
  %ma(whi,1, m=ml);
  fit whi gei;
run;

```

For comparison, the model is estimated by using PROC ARIMA as follows:

```

title2 'PROC ARIMA Using Maximum Likelihood ';

proc arima data=grunfeld;
  identify var=whi cross=(whf whc) noprint;
  estimate q=1 input=(whf whc) method=ml;
run;

```

PROC ARIMA does not estimate systems, so only one equation is evaluated.

The estimation results are shown in [Output 19.4.3](#) and [Output 19.4.4](#). The small differences in the parameter values between PROC MODEL and PROC ARIMA can be eliminated by tightening the convergence criteria for both procedures.

Output 19.4.3 PROC MODEL Results by Using ML Estimation

Example of MA(1) Error Process Using Grunfeld's Model						
MA(1) Error Process Using Maximum Likelihood						
The MODEL Procedure						
Nonlinear OLS Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
whi	4	16	1857.5	116.1	0.7323	0.6821
resid.whi		16	1344.0	84.0012		
gei	4	16	13742.5	858.9	0.6936	0.6361
resid.gei		16	8095.3	506.0		
Nonlinear OLS Parameter Estimates						
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label	
ge_int	-25.002	34.2933	-0.73	0.4765	GE Intercept	
ge_f	0.03712	0.0161	2.30	0.0351	GE Lagged Share Value Coef	
ge_c	0.137788	0.0380	3.63	0.0023	GE Lagged Capital Stock Coef	
wh_int	2.946761	9.5638	0.31	0.7620	WH Intercept	
wh_f	0.050395	0.0174	2.89	0.0106	WH Lagged Share Value Coef	
wh_c	0.066531	0.0729	0.91	0.3749	WH Lagged Capital Stock Coef	
gei_m1	-0.78516	0.1942	-4.04	0.0009	MA(gei) gei lag1 parameter	
whi_m1	-0.69389	0.2540	-2.73	0.0148	MA(whi) whi lag1 parameter	

Output 19.4.4 PROC ARIMA Results by Using ML Estimation

Example of MA(1) Error Process Using Grunfeld's Model							
PROC ARIMA Using Maximum Likelihood							
The ARIMA Procedure							
Maximum Likelihood Estimation							
Parameter	Estimate	Standard Error	t Value	Approx Pr > t	Lag	Variable	Shift
MU	2.95645	9.20752	0.32	0.7481	0	whi	0
MA1,1	-0.69305	0.25307	-2.74	0.0062	1	whi	0
NUM1	0.05036	0.01686	2.99	0.0028	0	whf	0
NUM2	0.06672	0.06939	0.96	0.3363	0	whc	0

Output 19.4.4 *continued*

Constant Estimate	2.956449
Variance Estimate	81.29645
Std Error Estimate	9.016455
AIC	148.9113
SBC	152.8942
Number of Residuals	20

Example 19.5: Polynomial Distributed Lags by Using %PDL

This example shows the use of the %PDL macro for polynomial distributed lag models. Simulated data is generated so that Y is a linear function of six lags of X, with the lag coefficients following a quadratic polynomial. The model is estimated by using a fourth-degree polynomial, both with and without endpoint constraints. The example uses simulated data generated from the following model:

$$y_t = 10 + \sum_{z=0}^6 f(z)x_{t-z} + \epsilon$$

$$f(z) = -5z^2 + 1.5z$$

The LIST option prints the model statements added by the %PDL macro. The following statements generate simulated data as shown:

```

/*-----*/
/*  Generate Simulated Data for a Linear Model with a PDL on X  */
/*      y = 10 + x(6,2) + e                                     */
/*      pdl(x) = -5.*(lg)**2 + 1.5*(lg) + 0.                    */
/*-----*/
data pdl;
  pdl2=-5.; pdl1=1.5; pdl0=0;
  array zz(i) z0-z6;
  do i=1 to 7;
    z=i-1;
    zz=pdl2*z**2 + pdl1*z + pdl0;
  end;
  do n=-11 to 30;
    x =10*ranuni(1234567)-5;
    pdl=z0*x + z1*x11 + z2*x12 + z3*x13 + z4*x14 + z5*x15 + z6*x16;
    e =10*rannor(1234567);
    y =10+pdl+e;
    if n>=1 then output;
    x16=x15; x15=x14; x14=x13; x13=x12; x12=x11; x11=x;
  end;
run;

title1 'Polynomial Distributed Lag Example';
title3 'Estimation of PDL(6,4) Model-- No Endpoint Restrictions';

```

```

proc model data=pdl;
  parms int;                                /* declare the intercept parameter */
  %pdl( xpdL, 6, 4 )                        /* declare the lag distribution */
  y = int + %pdl( xpdL, x );                /* define the model equation */
  fit y / list;                             /* estimate the parameters */
run;

```

The LIST output for the model without endpoint restrictions is shown in [Output 19.5.1](#). The first seven statements in the generated program are the polynomial expressions for lag parameters XPDL_L0 through XPDL_L6. The estimated parameters are INT, XPDL_0, XPDL_1, XPDL_2, XPDL_3, and XPDL_4.

Output 19.5.1 PROC MODEL Listing of Generated Program

Polynomial Distributed Lag Example		
Estimation of PDL(6,4) Model-- No Endpoint Restrictions		
The MODEL Procedure		
Listing of Compiled Program Code		
Stmt	Line:Col	Statement as Parsed
1	4483:14	XPDL_L0 = XPDL_0;
2	4483:14	XPDL_L1 = XPDL_0 + XPDL_1 + XPDL_2 + XPDL_3 + XPDL_4;
3	4483:14	XPDL_L2 = XPDL_0 + XPDL_1 * 2 + XPDL_2 * 2 ** 2 + XPDL_3 * 2 ** 3 + XPDL_4 * 2 ** 4;
4	4483:14	XPDL_L3 = XPDL_0 + XPDL_1 * 3 + XPDL_2 * 3 ** 2 + XPDL_3 * 3 ** 3 + XPDL_4 * 3 ** 4;
5	4483:14	XPDL_L4 = XPDL_0 + XPDL_1 * 4 + XPDL_2 * 4 ** 2 + XPDL_3 * 4 ** 3 + XPDL_4 * 4 ** 4;
6	4483:14	XPDL_L5 = XPDL_0 + XPDL_1 * 5 + XPDL_2 * 5 ** 2 + XPDL_3 * 5 ** 3 + XPDL_4 * 5 ** 4;
7	4483:14	XPDL_L6 = XPDL_0 + XPDL_1 * 6 + XPDL_2 * 6 ** 2 + XPDL_3 * 6 ** 3 + XPDL_4 * 6 ** 4;
8	4484:4	PRED.y = int + XPDL_L0 * x + XPDL_L1 * LAG1(x) + XPDL_L2 * LAG2(x) + XPDL_L3 * LAG3(x) + XPDL_L4 * LAG4(x) + XPDL_L5 * LAG5(x) + XPDL_L6 * LAG6(x);
8	4484:4	RESID.y = PRED.y - ACTUAL.y;
8	4484:4	ERROR.y = PRED.y - y;
9	4483:15	ESTIMATE XPDL_L0, XPDL_L1, XPDL_L2, XPDL_L3, XPDL_L4, XPDL_L5, XPDL_L6;
10	4483:15	_est0 = XPDL_L0;
11	4483:15	_est1 = XPDL_L1;
12	4483:15	_est2 = XPDL_L2;
13	4483:15	_est3 = XPDL_L3;
14	4483:15	_est4 = XPDL_L4;
15	4483:15	_est5 = XPDL_L5;
16	4483:14	_est6 = XPDL_L6;

Output 19.5.3 PROC MODEL Results Specifying Both Endpoint Restrictions

Polynomial Distributed Lag Example							
Estimation of PDL(6,4) Model-- Both Endpoint Restrictions							
The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
y	4	20	449868	22493.4	150.0	0.9596	0.9535
Nonlinear OLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label		
int	17.08581	32.4032	0.53	0.6038			
XPDL_2	13.88433	5.4361	2.55	0.0189	PDL(XPDL, 6, 4)		
XPDL_3	-9.3535	1.7602	-5.31	<.0001	parameter for (L)**2		
XPDL_4	1.032421	0.1471	7.02	<.0001	PDL(XPDL, 6, 4)		
					parameter for (L)**3		
					PDL(XPDL, 6, 4)		
					parameter for (L)**4		

Note that XPDL_0 and XPDL_1 are not shown in the estimate summary. They were used to satisfy the endpoint restrictions analytically by the generated %PDL macro code. Their values can be determined by back substitution.

To estimate the PDL model with one or more of the polynomial terms dropped, specify the largest degree of the polynomial desired with the %PDL macro and use the DROP= option in the FIT statement to remove the unwanted terms. The dropped parameters should be set to 0. The following PROC MODEL statements demonstrate estimation with a PDL of degree 2 without the 0th order term.

```

title3 'Estimation of PDL(6,2) Model-- With XPDL_0 Dropped';

proc model data=pd1 list;
  parms int;                               /* declare the intercept parameter */
  %pdl( xpdl, 6, 2 )                       /* declare the lag distribution */
  y = int + %pdl( xpdl, x );               /* define the model equation */
  xpdl_0 =0;
  fit y drop=xpdl_0;                       /* estimate the parameters */
run;

```

The results from this estimation are shown in [Output 19.5.4](#).

Output 19.5.4 PROC MODEL Results That Specify %PDL(XPDL, 6, 2)

Polynomial Distributed Lag Example							
Estimation of PDL(6,2) Model-- With XPDL_0 Dropped							
The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
y	3	21	2114.1	100.7	10.0335	0.9998	0.9998
Nonlinear OLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t	Label		
int	9.536382	2.1685	4.40	0.0003			
XPDL_1	1.883315	0.3159	5.96	<.0001	PDL(XPDL, 6, 2)		
					parameter for (L)**1		
XPDL_2	-5.08827	0.0656	-77.56	<.0001	PDL(XPDL, 6, 2)		
					parameter for (L)**2		

Example 19.6: General Form Equations

Data for this example are generated. General form equations are estimated and forecast by using PROC MODEL. The system is a basic supply and demand model.

The following statements specify the form of the model:

```

title1 "General Form Equations for Supply-Demand Model";

proc model outmodel=model;
  var price quantity income unitcost;
  parms d0-d2 s0-s2;
  eq.demand=d0+d1*price+d2*income-quantity;
  eq.supply=s0+s1*price+s2*unitcost-quantity;
run;

```

Three data sets are used in this example. The first data set, HISTORY, is used to estimate the parameters of the model. The ASSUME data set is used to produce a forecast of PRICE and QUANTITY. Notice that the ASSUME data set does not need to contain the variables PRICE and QUANTITY. The HISTORY data set is shown as follows:

```

data history;
  input year income unitcost price quantity;
datalines;
1976      2221.87      3.31220      0.17903      266.714

```

```

1977      2254.77      3.61647      0.06757      276.049
... more lines ...

```

The ASSUME data set is shown as follows:

```

data assume;
  input year income unitcost;
datalines;
1986      2571.87      2.31220
1987      2609.12      2.45633
1988      2639.77      2.51647
1989      2667.77      1.65617
1990      2705.16      1.01601
;

```

The third data set, GOAL, used in a forecast of PRICE and UNITCOST as a function of INCOME and QUANTITY is as follows:

```

data goal;
  input year income quantity;
datalines;
1986      2571.87      371.4
1987      2721.08      416.5
1988      3327.05      597.3
1989      3885.85      764.1
1990      3650.98      694.3
;

```

The following statements fit the model to the HISTORY data set and solve the fitted model for the ASSUME data set.

```

proc model model=model outmodel=model;

/* estimate the model parameters */
  fit supply demand / data=history outest=est n2sls;
  instruments income unitcost year;
run;

/* produce forecasts for income and unitcost assumptions */
  solve price quantity / data=assume out=pq;
run;

title2 "Parameter Estimates for the System";
proc print data=est;
run;

title2 "Price Quantity Solution";
proc print data=pq;
run;

```

The model summary of the supply and demand model is shown as follows:

Output 19.6.1 Model Summary

General Form Equations for Supply-Demand Model					
The MODEL Procedure					
Model Summary					
Model Variables	4				
Parameters	6				
Equations	2				
Number of Statements	3				
Model Variables	price	quantity	income	unitcost	
Parameters	d0	d1	d2	s0	s1 s2
Equations	demand	supply			
The 2 Equations to Estimate					
supply =	F(s0(1), s1(price), s2(unitcost))				
demand =	F(d0(1), d1(price), d2(income))				
Instruments	1	income	unitcost	year	

The estimation results are shown in [Output 19.6.2](#) and the OUTEST= data set is shown in [Output 19.6.3](#). The output data set produced by the SOLVE statement is shown in [Output 19.6.4](#).

Output 19.6.2 Output from the FIT Statement

General Form Equations for Supply-Demand Model							
The MODEL Procedure							
Nonlinear 2SLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
supply	3	7	3.3240	0.4749	0.6891		
demand	3	7	1.0829	0.1547	0.3933		
Nonlinear 2SLS Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t			
d0	-395.887	4.1841	-94.62	<.0001			
d1	0.717328	0.5673	1.26	0.2466			
d2	0.298061	0.00187	159.65	<.0001			
s0	-107.62	4.1780	-25.76	<.0001			
s1	201.5711	1.5977	126.16	<.0001			
s2	102.2116	1.1217	91.12	<.0001			

Output 19.6.3 Listing of OUTEST= Data Set Created in the FIT Statement

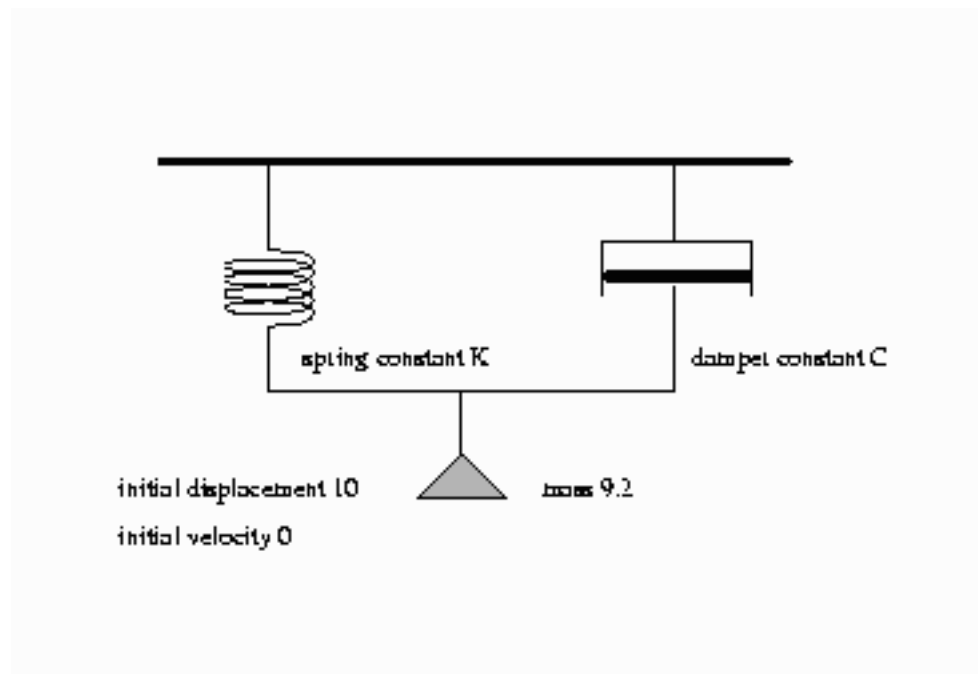
General Form Equations for Supply-Demand Model										
Parameter Estimates for the System										
			—							
			S							
			T	N						
			A	U						
			T	S						
			U	E						
			S	D	d	d	d	s	s	s
			—	—	0	1	2	0	1	2
1	2SLS	0	Converged	10	-395.887	0.71733	0.29806	-107.620	201.571	102.212

Output 19.6.5 Listing of OUT= Data Set Created in the Second SOLVE Statement

General Form Equations for Supply-Demand Model Price Unitcost Solution								
Obs	_TYPE_	_MODE_	_ERRORS_	price	quantity	income	unitcost	year
1	PREDICT	SIMULATE	0	0.99284	371.4	2571.87	2.72857	1986
2	PREDICT	SIMULATE	0	1.86594	416.5	2721.08	1.44798	1987
3	PREDICT	SIMULATE	0	2.12230	597.3	3327.05	2.71130	1988
4	PREDICT	SIMULATE	0	2.46166	764.1	3885.85	3.67395	1989
5	PREDICT	SIMULATE	0	2.74831	694.3	3650.98	2.42576	1990

Example 19.7: Spring and Damper Continuous System

This model simulates the mechanical behavior of a spring and damper system shown in Figure 19.92.

Figure 19.92 Spring and Damper System Model

A mass is hung from a spring with spring constant K . The motion is slowed by a damper with damper constant C . The damping force is proportional to the velocity, while the spring force is proportional to the displacement.

This is actually a continuous system; however, the behavior can be approximated by a discrete time model. We approximate the differential equation

$$\frac{\partial \text{disp}}{\partial \text{time}} = \text{velocity}$$

with the difference equation

$$\frac{\Delta \text{disp}}{\Delta \text{time}} = \text{velocity}$$

This is rewritten as

$$\frac{\text{disp} - \text{LAG}(\text{disp})}{dt} = \text{velocity}$$

where dt is the time step used. In PROC MODEL, this is expressed with the program statement

```
disp = lag(disp) + vel * dt;
```

or

```
dert.disp = vel;
```

The first statement is simply a computing formula for Euler's approximation for the integral

$$\text{disp} = \int \text{velocity} dt$$

If the time step is small enough with respect to the changes in the system, the approximation is good. Although PROC MODEL does not have the variable step-size and error-monitoring features of simulators designed for continuous systems, the procedure is a good tool to use for less challenging continuous models.

The second form instructs the MODEL procedure to do the integration for you.

This model is unusual because there are no exogenous variables, and endogenous data are not needed. Although you still need a SAS data set to count the simulation periods, no actual data are brought in.

Since the variables DISP and VEL are lagged, initial values specified in the VAR statement determine the starting state of the system. The mass, time step, spring constant, and damper constant are declared and initialized by a CONTROL statement as shown in the following statements:

```
title1 'Simulation of Spring-Mass-Damper System';

/*- Data to drive the simulation time periods ---*/
data one;
  do n=1 to 100;
    output;
  end;
run;

proc model data=one outmodel=spring;
  var      force -200  disp  10  vel  0  accel -20  time 0;
  control  mass   9.2  c    1.5  dt   .1  k      20;
  force = -k * disp -c * vel;
  disp  = lag(disp) + vel * dt;
  vel   = lag(vel) + accel * dt;
```

```

    accel = force / mass;
    time = lag(time) + dt;
run;

```

The displacement scale is zeroed at the point where the force of gravity is offset, so the acceleration of the gravity constant is omitted from the force equation. The control variable C and K represent the damper and the spring constants respectively.

The model is simulated three times, and the simulation results are written to output data sets. The first run uses the original initial conditions specified in the VAR statement. In the second run, the initial displacement is doubled; the results show that the period of the motion is unaffected by the amplitude. In the third run, the DERT. syntax is used to do the integration. Notice that the path of the displacement is close to the old path, indicating that the original time step is short enough to yield an accurate solution. These simulations are performed by the following statements:

```

proc model data=one model=spring;
    title2 "Simulation of the model for the base case";
    control run '1';
    solve / out=a;
run;

    title2 "Simulation of the model with twice the initial displacement";
    control run '2';
    var disp 20;
    solve / out=b;
run;

data two;
    do time = 0 to 10 by .2; output;end;
run;

title2 "Simulation of the model using the dert. syntax";
proc model data=two;
    var      force -200  disp  10  vel  0  accel -20  time 0;
    control  mass   9.2  c    1.5  dt   .1  k      20;
    control run '3' ;
    force = -k * disp -c * vel;
    dert.disp = vel ;
    dert.vel   = accel;
    accel = force / mass;
    solve / out=c;
    id time ;
run;

```

The output SAS data sets that contain the solution results are merged and the displacement time paths for the three simulations are plotted. The three runs are identified on the plot as 1, 2, and 3. The following statements produce [Output 19.7.1](#) through [Output 19.7.5](#).

```

data p;
    set a b c;
run;

title2 'Overlay Plot of All Three Simulations';

```

```
proc sgplot data=p;
  series x=time y=disp / group=run lineattrs=(pattern=1);
  xaxis values=(0 to 10 by 1);
  yaxis values=(-20 to 20 by 10);
run;
```

Output 19.7.1 Model Summary

Simulation of Spring-Mass-Damper System	
Simulation of the model for the base case	
The MODEL Procedure	
Model Summary	
Model Variables	5
Control Variables	5
Equations	5
Number of Statements	6
Program Lag Length	1
Model Variables	force(-200) disp(10) vel(0) accel(-20) time(0)
Control Variables	mass(9.2) c(1.5) dt(0.1) k(20) run(1)
Equations	force disp vel accel time

Output 19.7.2 Printed Output Produced by PROC MODEL SOLVE Statements

Simulation of Spring-Mass-Damper System	
Simulation of the model for the base case	
The MODEL Procedure	
Dynamic Simultaneous Simulation	
Data Set Options	
DATA=	ONE
OUT=	A
Solution Summary	
Variables Solved	5
Simulation Lag Length	1
Solution Method	NEWTON
CONVERGE=	1E-8
Maximum CC	8.68E-15
Maximum Iterations	1
Total Iterations	99
Average Iterations	1

Output 19.7.2 *continued*

Observations Processed	
Read	100
Lagged	1
Solved	99
First	2
Last	100
Variables Solved For force disp vel accel time	

Output 19.7.3 Printed Output Produced by PROC MODEL SOLVE Statements

Simulation of Spring-Mass-Damper System	
Simulation of the model with twice the initial displacement	
The MODEL Procedure	
Dynamic Simultaneous Simulation	
Data Set Options	
DATA=	ONE
OUT=	B
Solution Summary	
Variables Solved	5
Simulation Lag Length	1
Solution Method	NEWTON
CONVERGE=	1E-8
Maximum CC	2.64E-14
Maximum Iterations	1
Total Iterations	99
Average Iterations	1
Observations Processed	
Read	100
Lagged	1
Solved	99
First	2
Last	100
Variables Solved For force disp vel accel time	

Output 19.7.4 Printed Output Produced by PROC MODEL SOLVE Statements

```

      Simulation of Spring-Mass-Damper System
      Simulation of the model using the dert. syntax

      The MODEL Procedure
      Simultaneous Simulation

      Data Set Options

      DATA=      TWO
      OUT=        C

      Solution Summary

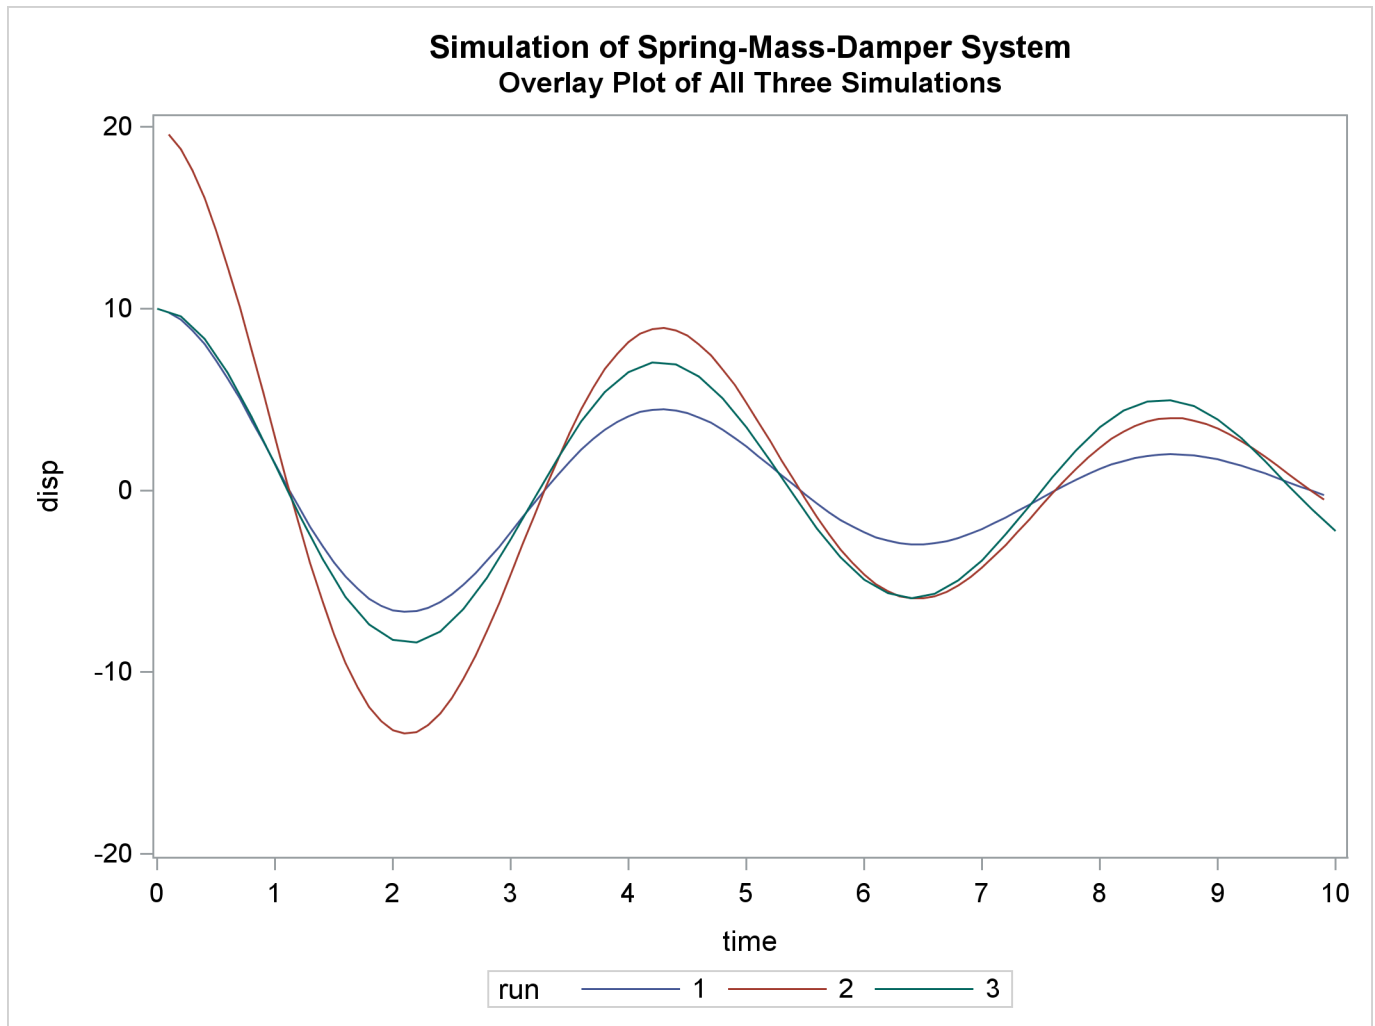
      Variables Solved      4
      Solution Method      NEWTON
      Maximum Iterations    0

      Observations Processed

      Read      51
      Solved    51

      Variables Solved For  force disp vel accel
      ODE's               dert.disp dert.vel
      Auxiliary Equations  force accel

```


Output 19.7.5 Overlay Plot of Three Simulations**Example 19.8: Nonlinear FIML Estimation**

The data and model for this example were obtained from Bard (1974, p.133–138). The example is a two-equation econometric model used by Bodkin and Klein to fit U.S production data for the years 1909–1949. The model is the following:

$$g_1 = c_1 10^{c_2 z_4} (c_5 z_1^{-c_4} + (1 - c_5) z_2^{-c_4})^{-c_3/c_4} - z_3 = 0$$

$$g_2 = [c_5 / (1 - c_5)] (z_1 / z_2)^{(-1 - c_4)} - z_5 = 0$$

where z_1 is capital input, z_2 is labor input, z_3 is real output, z_4 is time in years with 1929 as year zero, and z_5 is the ratio of price of capital services to wage scale. The c_i 's are the unknown parameters. z_1 and z_2 are considered endogenous variables. A FIML estimation is performed by using the following statements:

```
data bodkin;
  input z1 z2 z3 z4 z5;
```

```

datalines;
1.33135 0.64629 0.4026 -20 0.24447
1.39235 0.66302 0.4084 -19 0.23454

... more lines ...

title1 "Nonlinear FIML Estimation";

proc model data=bodkin;
  parms c1-c5;
  endogenous z1 z2;
  exogenous z3 z4 z5;

  eq.g1 = c1 * 10 ** (c2 * z4) * (c5*z1**(-c4)+
    (1-c5)*z2**(-c4))**(-c3/c4) - z3;
  eq.g2 = (c5/(1-c5))*(z1/z2)**(-1-c4) -z5;

  fit g1 g2 / fiml ;
run;

```

When FIML estimation is selected, the log likelihood of the system is output as the objective value. The results of the estimation are shown in [Output 19.8.1](#).


Output 19.8.1 FIML Estimation Results for U.S. Production Data

Nonlinear FIML Estimation							
The MODEL Procedure							
Nonlinear FIML Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
g1	4	37	0.0529	0.00143	0.0378		
g2	1	40	0.0173	0.000431	0.0208		
Nonlinear FIML Parameter Estimates							
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t			
c1	0.58395	0.0218	26.76	<.0001			
c2	0.005877	0.000673	8.74	<.0001			
c3	1.3636	0.1148	11.87	<.0001			
c4	0.473688	0.2699	1.75	0.0873			
c5	0.446748	0.0596	7.49	<.0001			
Number of Observations			Statistics for System				
Used	41	Log Likelihood	110.7773				
Missing	0						

Example 19.9: Circuit Estimation

Consider the nonlinear circuit shown in Figure 19.93.

Figure 19.93 Nonlinear Resistor Capacitor Circuit



The theory of electric circuits is governed by Kirchhoff's laws: the sum of the currents flowing to a node is zero, and the net voltage drop around a closed loop is zero. In addition to Kirchhoff's laws, there are relationships between the current I through each element and the voltage drop V across the elements. For the circuit in Figure 19.93, the relationships are

$$C \frac{dV}{dt} = I$$

for the capacitor and

$$V = (R_1 + R_2(1 - \exp(-V)))I$$

for the nonlinear resistor. The following differential equation describes the current at node 2 as a function of time and voltage for this circuit:

$$C \frac{dV_2}{dt} - \frac{V_1 - V_2}{R_1 + R_2(1 - \exp(-V))} = 0$$

This equation can be written in the form

$$\frac{dV_2}{dt} = \frac{V_1 - V_2}{(R_1 + R_2(1 - \exp(-V)))C}$$

Consider the following data.

```
data circ;
  input v2 v1 time@@;
datalines;
```

```

-0.00007 0.0 0.0000000001 0.00912 0.5 0.0000000002
0.03091 1.0 0.0000000003 0.06419 1.5 0.0000000004
0.11019 2.0 0.0000000005 0.16398 2.5 0.0000000006
0.23048 3.0 0.0000000007 0.30529 3.5 0.0000000008
0.39394 4.0 0.0000000009 0.49121 4.5 0.0000000010
0.59476 5.0 0.0000000011 0.70285 5.0 0.0000000012
0.81315 5.0 0.0000000013 0.90929 5.0 0.0000000014
1.01412 5.0 0.0000000015 1.11386 5.0 0.0000000016
1.21106 5.0 0.0000000017 1.30237 5.0 0.0000000018
1.40461 5.0 0.0000000019 1.48624 5.0 0.0000000020
1.57894 5.0 0.0000000021 1.66471 5.0 0.0000000022
;

```

You can estimate the parameters in the preceding equation by using the following SAS statements:

```

title1 'Circuit Model Estimation Example';

proc model data=circ mintimestep=1.0e-23;
  parm R2 2000 R1 4000 C 5.0e-13;
  dert.v2 = (v1-v2)/((r1 + r2*(1-exp( -(v1-v2)))) * C);
  fit v2;
run;

```

The results of the estimation are shown in [Output 19.9.1](#).

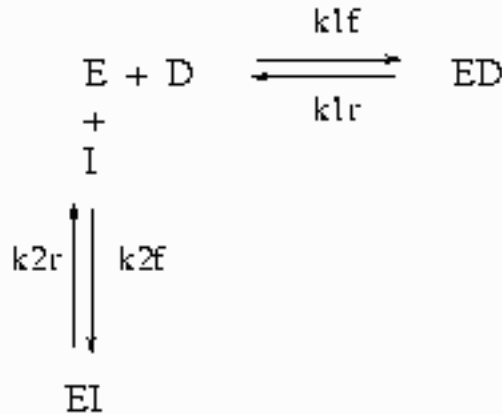
Output 19.9.1 Circuit Estimation

Circuit Model Estimation Example				
The MODEL Procedure				
Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
R2	3002.471	1517.1	<-----	Biased
R1	4984.842	1466.8	<-----	Biased
C	5E-13	0	<-----	Biased
NOTE: The model was singular. Some estimates are marked 'Biased'.				

In this case, the model equation is such that there is linear dependency that causes biased results and inflated variances. The Jacobian matrix is singular or nearly singular, but eliminating one of the parameters is not a solution in this case.

Example 19.10: Systems of Differential Equations

The following is a simplified reaction scheme for the competitive inhibitors with recombinant human renin (Morelock et al. 1995).

Figure 19.94 Competitive Inhibition of Recombinant Human Renin

In Figure 19.94, E =enzyme, D =probe, and I =inhibitor.

The differential equations that describe this reaction scheme are as follows:

$$\frac{dD}{dt} = k1r*ED - k1f*E*D$$

$$\frac{dED}{dt} = k1f*E*D - k1r*ED$$

$$\frac{dE}{dt} = k1r*ED - k1f*E*D + k2r*EI - k2f*E*I$$

$$\frac{dEI}{dt} = k2f*E*I - k2r*EI$$

$$\frac{dI}{dt} = k2r*EI - k2f*E*I$$

For this system, the initial values for the concentrations are derived from equilibrium considerations (as a function of parameters) or are provided as known values.

The experiment used to collect the data was carried out in two ways; preincubation (type='disassoc') and no preincubation (type='assoc'). The data also contain repeated measurements. The data contain values for fluorescence F , which is a function of concentration. Since there are no direct data for the concentrations, all the differential equations are simulated dynamically.

The SAS statements used to fit this model are as follows:

```

title1 'Systems of Differential Equations Example';

proc sort data=fit;
    by type time;
run;

%let k1f = 6.85e6 ;
%let k1r = 3.43e-4 ;
%let k2f = 1.8e7 ;
%let k2r = 2.1e-2 ;

%let qf = 2.1e8 ;
%let qb = 4.0e9 ;

%let dt = 5.0e-7 ;
%let et = 5.0e-8 ;
%let it = 8.05e-6 ;

proc model data=fit;

    parameters qf = 2.1e8
               qb = 4.0e9
               k2f = 1.8e5
               k2r = 2.1e-3
               l = 0;

               k1f = 6.85e6;
               k1r = 3.43e-4;

    /* Initial values for concentrations */
    control dt 5.0e-7
            et 5.0e-8
            it 8.05e-6;

    /* Association initial values -----*/
    if type = 'assoc' and time=0 then do;
        ed = 0;
        /* solve quadratic equation -----*/
        a = 1;
        b = -(&it+&et+(k2r/k2f));
        c = &it*&et;
        ei = (-b-(((b**2)-(4*a*c))**.5))/(2*a);
        d = &dt-ed;
        i = &it-ei;
        e = &et-ed-ei;
    end;

    /* Disassociation initial values -----*/
    if type = 'disassoc' and time=0 then do;
        ei = 0;
        a = 1;
        b = -(&dt+&et+(&k1r/&k1f));
        c = &dt*&et;

```

```

    ed = (-b-((b**2)-(4*a*c))**.5)/(2*a);
    d = &dt-ed;
    i = &it-ei;
    e = &et-ed-ei;
end;

if time ne 0 then do;

    dert.d = k1r* ed  - k1f *e *d;

    dert.ed = k1f* e *d - k1r*ed;

    dert.e = k1r* ed - k1f* e * d  + k2r * ei - k2f * e *i;

    dert.ei = k2f* e *i - k2r * ei;

    dert.i = k2r * ei - k2f* e *i;

end;

/* L - offset between curves */
if type = 'disassoc' then
    F = (qf*(d-ed)) + (qb*ed) -L;
else
    F = (qf*(d-ed)) + (qb*ed);

fit F / method=marquardt;
run;

```

This estimation requires the repeated simulation of a system of 41 differential equations (5 base differential equations and 36 differential equations to compute the partials with respect to the parameters).

The results of the estimation are shown in [Output 19.10.1](#).

Output 19.10.1 Kinetics Estimation

Systems of Differential Equations Example							
The MODEL Procedure							
Nonlinear OLS Summary of Residual Errors							
Equation	DF Model	DF Error	SSE	MSE	Root MSE	R-Square	Adj R-Sq
f	5	797	2525.0	3.1681	1.7799	0.9980	0.9980

Output 19.10.1 *continued*

Nonlinear OLS Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
qf	2.0413E8	681443	299.55	<.0001
qb	4.2263E9	9133195	462.74	<.0001
k2f	6451186	866998	7.44	<.0001
k2r	0.007808	0.00103	7.55	<.0001
l	-5.76974	0.4138	-13.94	<.0001

Example 19.11: Monte Carlo Simulation

This example illustrates how the form of the error in a ODE model affects the results from a static and dynamic estimation. The differential equation studied is

$$\frac{dy}{dt} = a - ay$$

The analytical solution to this differential equation is

$$y = 1 - \exp(-at)$$

The first data set contains errors that are strictly additive and independent. The data for this estimation are generated by the following DATA step:

```
data drive1;
  a = 0.5;
  do iter=1 to 100;
    do time = 0 to 50;
      y = 1 - exp(-a*time) + 0.1 *rannor(123);
      output;
    end;
  end;
run;
```

The second data set contains errors that are cumulative in form.

```
data drive2;
  a = 0.5;
  yp = 1.0 + 0.01 *rannor(123);
  do iter=1 to 100;
    do time = 0 to 50;
      y = 1 - exp(-a)*(1 - yp);
      yp = y + 0.01 *rannor(123);
      output;
    end;
  end;
run;
```


The following statements perform the 100 static estimations for each data set:

```

title1 'Monte Carlo Simulation of ODE';

proc model data=drive1 noprint;
  parm a 0.5;
  dert.y = a - a * y;
  fit y / outest=est;
  by iter;
run;

```

Similar statements are used to produce 100 dynamic estimations with a fixed and an unknown initial value. The first value in the data set is used to simulate an error in the initial value. The following PROC UNIVARIATE statements process the estimations:

```

proc univariate data=est noprint;
  var a;
  output out=monte mean=mean p5=p5 p95=p95;
run;

proc print data=monte;
run;

```

The results of these estimations are summarized in [Table 19.6](#).

Table 19.6 Monte Carlo Summary, A=0.5

Estimation Type	Additive Error			Cumulative Error		
	mean	p95	p5	mean	p95	p5
static	0.77885	1.03524	0.54733	0.57863	1.16112	0.31334
dynamic fixed	0.48785	0.63273	0.37644	3.8546E24	8.88E10	-51.9249
dynamic unknown	0.48518	0.62452	0.36754	641704.51	1940.42	-25.6054

For this example model, it is evident that the static estimation is the least sensitive to misspecification.

Example 19.12: Cauchy Distribution Estimation

In this example a nonlinear model is estimated by using the Cauchy distribution. Then a simulation is done for one observation in the data.

The following DATA step creates the data for the model.

```

/* Generate a Cauchy distributed Y */
data c;
  format date monyy.;
  call streaminit(156789);
  do t=0 to 20 by 0.1;
    date=intnx('month', '01jun90'd, (t*10)-1);
    x=rand('normal');

```

```

        e=rand('cauchy') + 10 ;
        y=exp(4*x)+e;
        output;
    end;
run;

```

The model to be estimated is

$$y = e^{-a x} + \epsilon$$

$$\epsilon \sim \text{Cauchy}(nc)$$

That is, the residuals of the model are distributed as a Cauchy distribution with noncentrality parameter nc .

The log likelihood for the Cauchy distribution is

$$like = -\log(1 + (x - nc)^2 * \pi)$$

The following SAS statements specify the model and the log-likelihood function.

```

title1 'Cauchy Distribution';

proc model data=c ;
    dependent y;
    parm a -2 nc 4;
    y=exp(-a*x);

    /* Likelihood function for the residuals */
    obj = log(1+(-resid.y-nc)**2 * 3.1415926);

    errormodel y ~ general(obj) cdf=cauchy(nc);

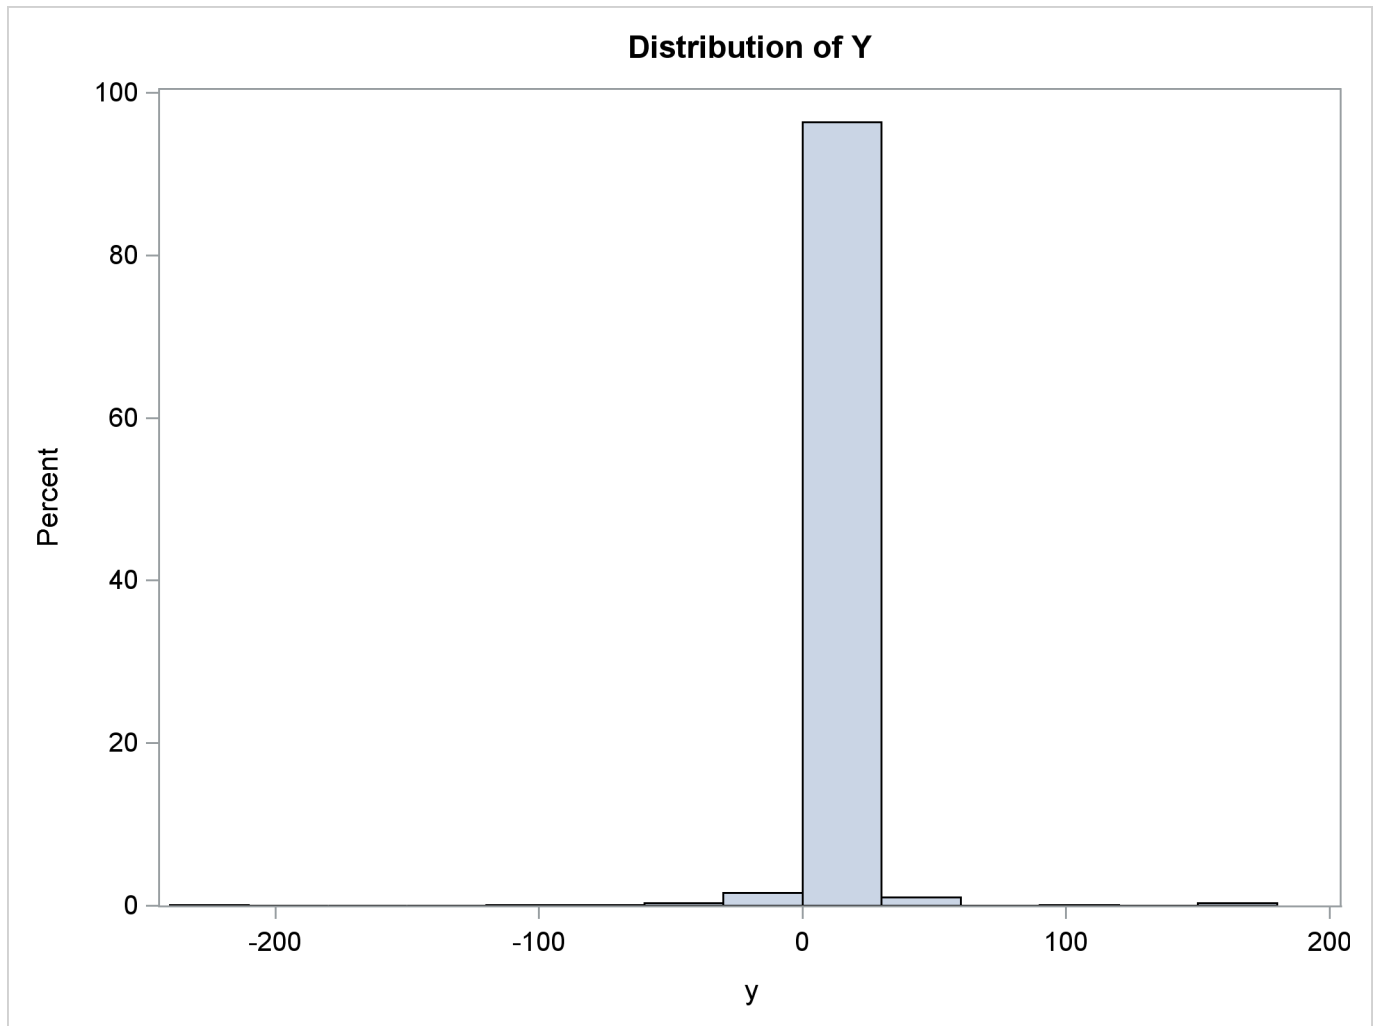
    fit y / outsn=s1 method=marquardt;
    solve y / sdata=s1 data=c(obs=1) random=1000
            seed=256789 out=out1;
run;

title 'Distribution of Y';
proc sgplot data=out1;
    histogram y;
run;

```

The FIT statement uses the OUTSN= option to output the Σ matrix for residuals from the normal distribution. The Σ matrix is 1×1 and has value 1.0 because it is a correlation matrix. The OUTS= matrix is the scalar 2989.0. Because the distribution is univariate (no covariances), the OUTS= option would produce the same simulation results. The simulation is performed by using the SOLVE statement.

The distribution of y is shown in the following output.

Output 19.12.1 Distribution of Y**Example 19.13: Switching Regression Example**

Take the usual linear regression problem

$$y = \mathbf{X}\beta + u$$

where Y denotes the n column vector of the dependent variable, \mathbf{X} denotes the $(n \times k)$ matrix of independent variables, β denotes the k column vector of coefficients to be estimated, n denotes the number of observations ($i = 1, 2, \dots, n$), and k denotes the number of independent variables.

You can take this basic equation and split it into two regimes, where the i th observation on y is generated by one regime or the other:

$$y_i = \sum_{j=1}^k \beta_{1j} X_{ji} + u_{1i} = x_i' \beta_1 + u_{1i}$$

$$y_i = \sum_{j=1}^k \beta_{2j} X_{ji} + u_{2i} = x_i' \beta_2 + u_{2i}$$

where x_{hi} and x_{hj} are the i th and j th observations, respectively, on x_h . The errors, u_{1i} and u_{2i} , are assumed to be distributed normally and independently with mean zero and constant variance. The variance for the first regime is σ_1^2 , and the variance for the second regime is σ_2^2 . If $\sigma_1^2 \neq \sigma_2^2$ and $\beta_1 \neq \beta_2$, the regression system given previously is thought to be switching between the two regimes.

The problem is to estimate β_1 , β_2 , σ_1 , and σ_2 without knowing *a priori* which of the n values of the dependent variable, y , was generated by which regime. If it is known *a priori* which observations belong to which regime, a simple Chow test can be used to test $\sigma_1^2 = \sigma_2^2$ and $\beta_1 = \beta_2$.

Using Goldfeld and Quandt's D-method for switching regression, you can solve this problem. Assume that observations exist on some exogenous variables z_{1i} , z_{2i} , ..., z_{pi} , where z determines whether the i th observation is generated from one equation or the other. The equations are given as follows:

$$y_i = x_i' \beta_1 + u_{1i} \quad \text{if } \sum_{j=1}^p \pi_j z_{ji} \leq 0$$

$$y_i = x_i' \beta_2 + u_{2i} \quad \text{if } \sum_{j=1}^p \pi_j z_{ji} > 0$$

where π_j are unknown coefficients to be estimated. Define $d(z_i)$ as a continuous approximation to a step function. Replacing the unit step function with a continuous approximation by using the cumulative normal integral enables a more practical method that produces consistent estimates.

$$d(z_i) = \frac{1}{\sqrt{2\pi}\sigma} \int_{-\infty}^{\sum \pi_j z_{ji}} \exp\left[-\frac{1}{2} \frac{\xi^2}{\sigma^2}\right] d\xi$$

D is the n dimensional diagonal matrix consisting of $d(z_i)$:

$$\mathbf{D} = \begin{bmatrix} d(z_1) & 0 & 0 & 0 \\ 0 & d(z_2) & 0 & 0 \\ 0 & 0 & \ddots & 0 \\ 0 & 0 & 0 & d(z_n) \end{bmatrix}$$

The parameters to estimate are now the k β_1 's, the k β_2 's, σ_1^2 , σ_2^2 , p π 's, and the σ introduced in the $d(z_i)$ equation. The σ can be considered as given *a priori*, or it can be estimated, in which case, the estimated magnitude provides an estimate of the success in discriminating between the two regimes (Goldfeld and Quandt 1976). Given the preceding equations, the model can be written as:

$$Y = (\mathbf{I} - \mathbf{D}) \mathbf{X} \beta_1 + \mathbf{D} \mathbf{X} \beta_2 + W$$

where $W = (\mathbf{I} - \mathbf{D})U_1 + \mathbf{D}U_2$, and W is a vector of unobservable and heteroscedastic error terms. The covariance matrix of W is denoted by $\mathbf{\Omega}$, where $\mathbf{\Omega} = (\mathbf{I} - \mathbf{D})^2\sigma_1^2 + \mathbf{D}^2\sigma_2^2$. The maximum likelihood parameter estimates maximize the following log-likelihood function.

$$\begin{aligned} \log L = & -\frac{n}{2} \log 2\pi - \frac{1}{2} \log |\mathbf{\Omega}| - \\ & \frac{1}{2} * [Y - (\mathbf{I} - \mathbf{D})\mathbf{X}\beta_1 - \mathbf{D}\mathbf{X}\beta_2]' \mathbf{\Omega}^{-1} [Y - (\mathbf{I} - \mathbf{D})\mathbf{X}\beta_1 - \mathbf{D}\mathbf{X}\beta_2] \end{aligned}$$

As an example, you now can use this switching regression likelihood to develop a model of housing starts as a function of changes in mortgage interest rates. The data for this example are from the U.S. Census Bureau and cover the period from January 1973 to March 1999. The hypothesis is that there are different coefficients on your model based on whether the interest rates are going up or down.

So the model for z_i is

$$z_i = p * (\text{rate}_i - \text{rate}_{i-1})$$

where rate_i is the mortgage interest rate at time i and p is a scale parameter to be estimated.

The regression model is

$$\begin{aligned} \text{starts}_i &= \text{intercept}_1 + \text{ar1} * \text{starts}_{i-1} + \text{djf1} * \text{decjanfeb} & z_i < 0 \\ \text{starts}_i &= \text{intercept}_2 + \text{ar2} * \text{starts}_{i-1} + \text{djf2} * \text{decjanfeb} & z_i \geq 0 \end{aligned}$$

where starts_i is the number of housing starts at month i and decjanfeb is a dummy variable that indicates that the current month is one of December, January, or February.

This model is written by using the following SAS statements:

```

title1 'Switching Regression Example';

proc model data=switch;
  parms sig1=10 sig2=10 int1 b11 b13 int2 b21 b23 p;
  bounds 0.0001 < sig1 sig2;

  decjanfeb = ( month(date) = 12 | month(date) <= 2 );

  a = p*dif(rate);          /* Upper bound of integral */
  d = probnorm(a);         /* Normal CDF as an approx of switch */

                                /* Regime 1 */
  y1 = int1 + zlag(starts)*b11 + decjanfeb *b13 ;
                                /* Regime 2 */
  y2 = int2 + zlag(starts)*b21 + decjanfeb *b23 ;
                                /* Composite regression equation */
  starts = (1 - d)*y1 + d*y2;

                                /* Resulting log-likelihood function */
  logL = (1/2)*( (log(2*3.1415)) +
    log( (sig1**2)*((1-d)**2)+(sig2**2)*(d**2) )

```

```

      + (resid.starts*( 1/( (sig1**2)*((1-d)**2)+
        (sig2**2)*(d**2) ) ) *resid.starts) ) ;

errormodel starts ~ general(logL);

fit starts / method=marquardt converge=1.0e-5;

/* Test for significant differences in the parms */
test int1 = int2 ,/ lm;
test b11 = b21 ,/ lm;
test b13 = b23 ,/ lm;
test sig1 = sig2 ,/ lm;

run;

```

Four TEST statements are added to test the hypothesis that the parameters are the same in both regimes. The parameter estimates and ANOVA table from this run are shown in [Output 19.13.1](#).

Output 19.13.1 Parameter Estimates from the Switching Regression

Switching Regression Example						
The MODEL Procedure						
Nonlinear Likelihood Summary of Residual Errors						
Equation	DF Model	DF Error	SSE	MSE	R-Square	Adj R-Sq
starts	9	304	85878.0	282.5	0.7806	0.7748
Nonlinear Likelihood Parameter Estimates						
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t		
sig1	15.47484	0.9476	16.33	<.0001		
sig2	19.77808	1.2710	15.56	<.0001		
int1	32.82221	5.9083	5.56	<.0001		
b11	0.73952	0.0444	16.64	<.0001		
b13	-15.4556	3.1912	-4.84	<.0001		
int2	42.73348	6.8159	6.27	<.0001		
b21	0.734117	0.0478	15.37	<.0001		
b23	-22.5184	4.2985	-5.24	<.0001		
p	25.94712	8.5205	3.05	0.0025		

The test results shown in [Output 19.13.2](#) suggest that the variance of the housing starts, SIG1 and SIG2, are significantly different in the two regimes. The tests also show a significant difference in the AR term on the housing starts.

Output 19.13.2 Test Results for Switching Regression

Test Results				
Test	Type	Statistic	Pr > ChiSq	Label
Test0	L.M.	1.00	0.3185	int1 = int2
Test1	L.M.	15636	<.0001	b11 = b21
Test2	L.M.	1.45	0.2280	b13 = b23
Test3	L.M.	4.39	0.0361	sig1 = sig2

Example 19.14: Simulating from a Mixture of Distributions

This example illustrates how to perform a multivariate simulation by using models that have different error distributions. Three models are used. The first model has t distributed errors. The second model is a GARCH(1,1) model with normally distributed errors. The third model has a noncentral Cauchy distribution.

The following SAS statements generate the data for this example. The t and the CAUCHY data sets use a common seed so that those two series are correlated.

```

/* set distribution parameters */
%let df = 7.5;
%let sig1 = .5;
%let var2 = 2.5;

data t;
  format date monyy.;
  do date='1jun2001'd to '1nov2002'd;
    /* t-distribution with df,sig1 */
    t = .05 * date + 5000 + &sig1*tinv(ranuni(1234),&df);
    output;
  end;
run;

data normal;
  format date monyy.;
  le = &var2;
  lv = &var2;
  do date='1jun2001'd to '1nov2002'd;
    /* Normal with GARCH error structure */
    v = 0.0001 + 0.2 * le**2 + .75 * lv;
    e = sqrt(v) * rannor(12345);
    normal = 25 + e;
    le = e;
    lv = v;
    output;
  end;
run;

data cauchy;

```

```

format date monyy.;
PI = 3.1415926;
do date='1jun2001'd to '1nov2002'd;
    cauchy = -4 + tan((ranuni(1234) - 0.5) * PI);
    output;
end;
run;

```

Since the multivariate joint likelihood is unknown, the models must be estimated separately. The residuals for each model are saved by using the OUT= option. Also, each model is saved by using the OUTMODEL= option. The ID statement is used to provide a variable in the residual data set to merge by. The XLAG function is used to model the GARCH(1,1) process. The XLAG function returns the lag of the first argument if it is nonmissing, otherwise it returns the second argument.

```

title1 't-distributed Errors Example';

proc model data=t outmod=tModel;
    parms df 10 vt 4;
    t = a * date + c;
    errormodel t ~ t( vt, df );
    fit t / out=tresid;
    id date;
run;

title1 'GARCH-distributed Errors Example';

proc model data=normal outmodel=normalModel;
    normal = b0 ;
    h.normal = arch0 + arch1 * xlag(resid.normal **2 , mse.normal)
                + GARCH1 * xlag(h.normal, mse.normal);

    fit normal /fiml out=nresid;
    id date;
run;

title1 'Cauchy-distributed Errors Example';

proc model data=cauchy outmod=cauchyModel;
    parms nc = 1;
    /* nc is noncentrality parm to Cauchy dist */
    cauchy = nc;
    obj = log(1+resid.cauchy**2 * 3.1415926);
    errormodel cauchy ~ general(obj) cdf=cauchy(nc);

    fit cauchy / out=cresid;
    id date;
run;

```

The simulation requires a covariance matrix created from normal residuals. The following DATA step statements use the inverse CDFs of the t and Cauchy distributions to convert the residuals to the normal distribution. The CORR procedure is used to create a correlation matrix that uses the converted residuals.


```

/* Merge and normalize the 3 residual data sets */
data c; merge tresid nresid cresid; by date;
    t = probit(cdf("T", t/sqrt(0.2789), 16.58 ));
    cauchy = probit(cdf("CAUCHY", cauchy, -4.0623));
run;

proc corr data=c out=s;
    var t normal cauchy;
run;

```

Now the models can be simulated together by using the MODEL procedure SOLVE statement. The data set created by the CORR procedure is used as the correlation matrix.

```

title1 'Simulating Equations with Different Error Distributions';

/* Create one observation driver data set */
data sim; merge t normal cauchy; by date;
data sim; set sim(firstobs = 519 );

proc model data=sim model=( tModel normalModel cauchyModel );
    errormodel t ~ t( vt, df );
    errormodel cauchy ~ cauchy(nc);
    solve t cauchy normal / random=2000 seed=1962 out=monte
        sdata=s(where=(_type_="CORR"));
run;

```

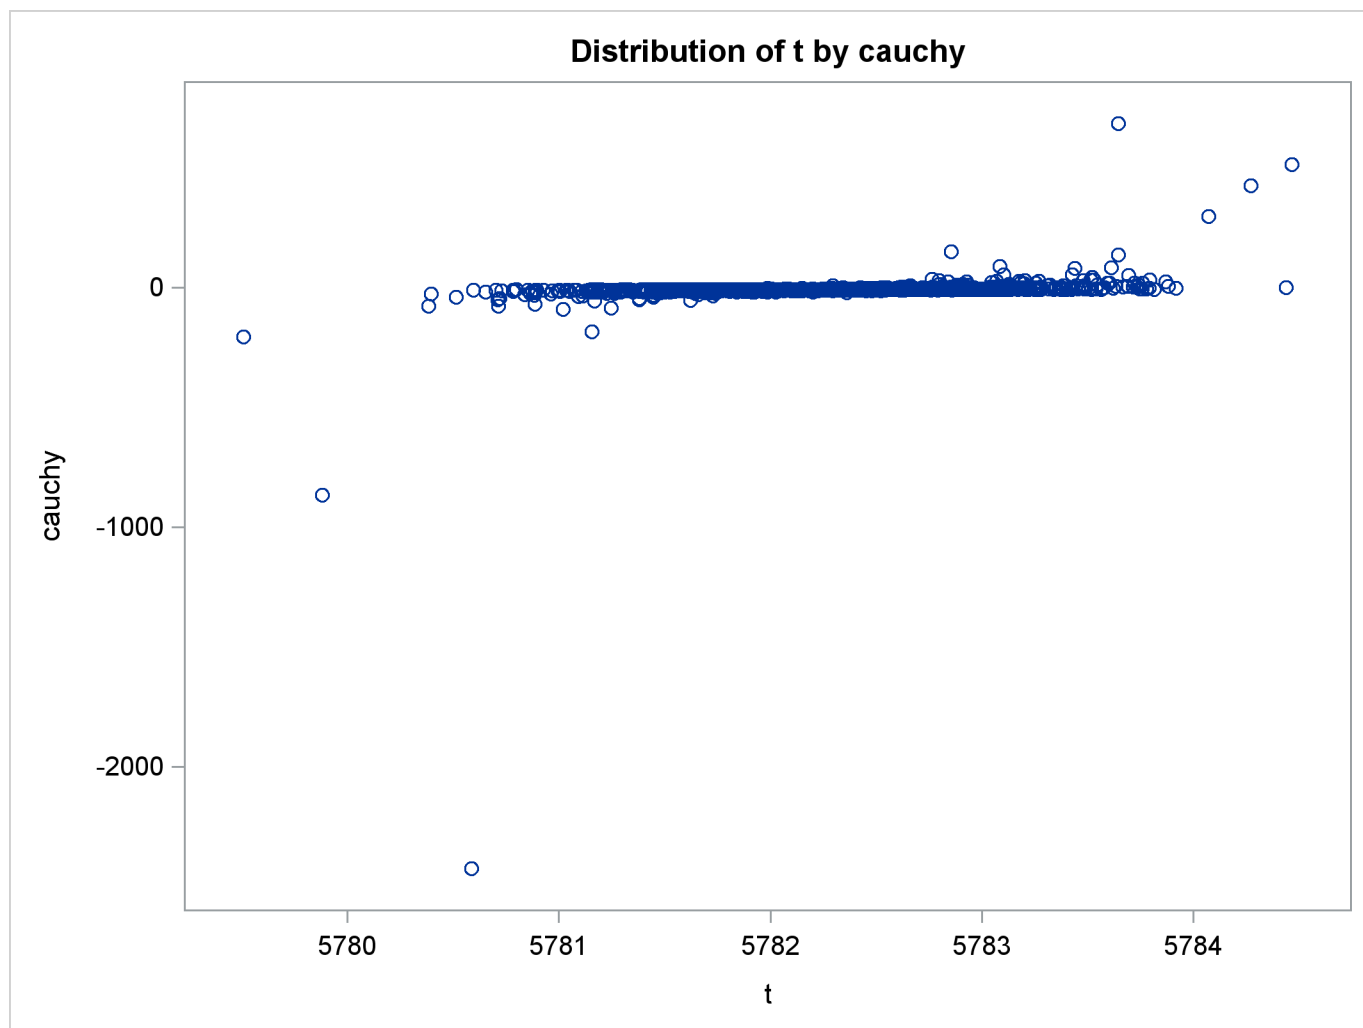
An estimation of the joint density of the t and Cauchy distribution is created by using the KDE procedure. Bounds are placed on the Cauchy dimension because of its fat tail behavior. The joint PDF is shown in [Output 19.14.1](#).

```

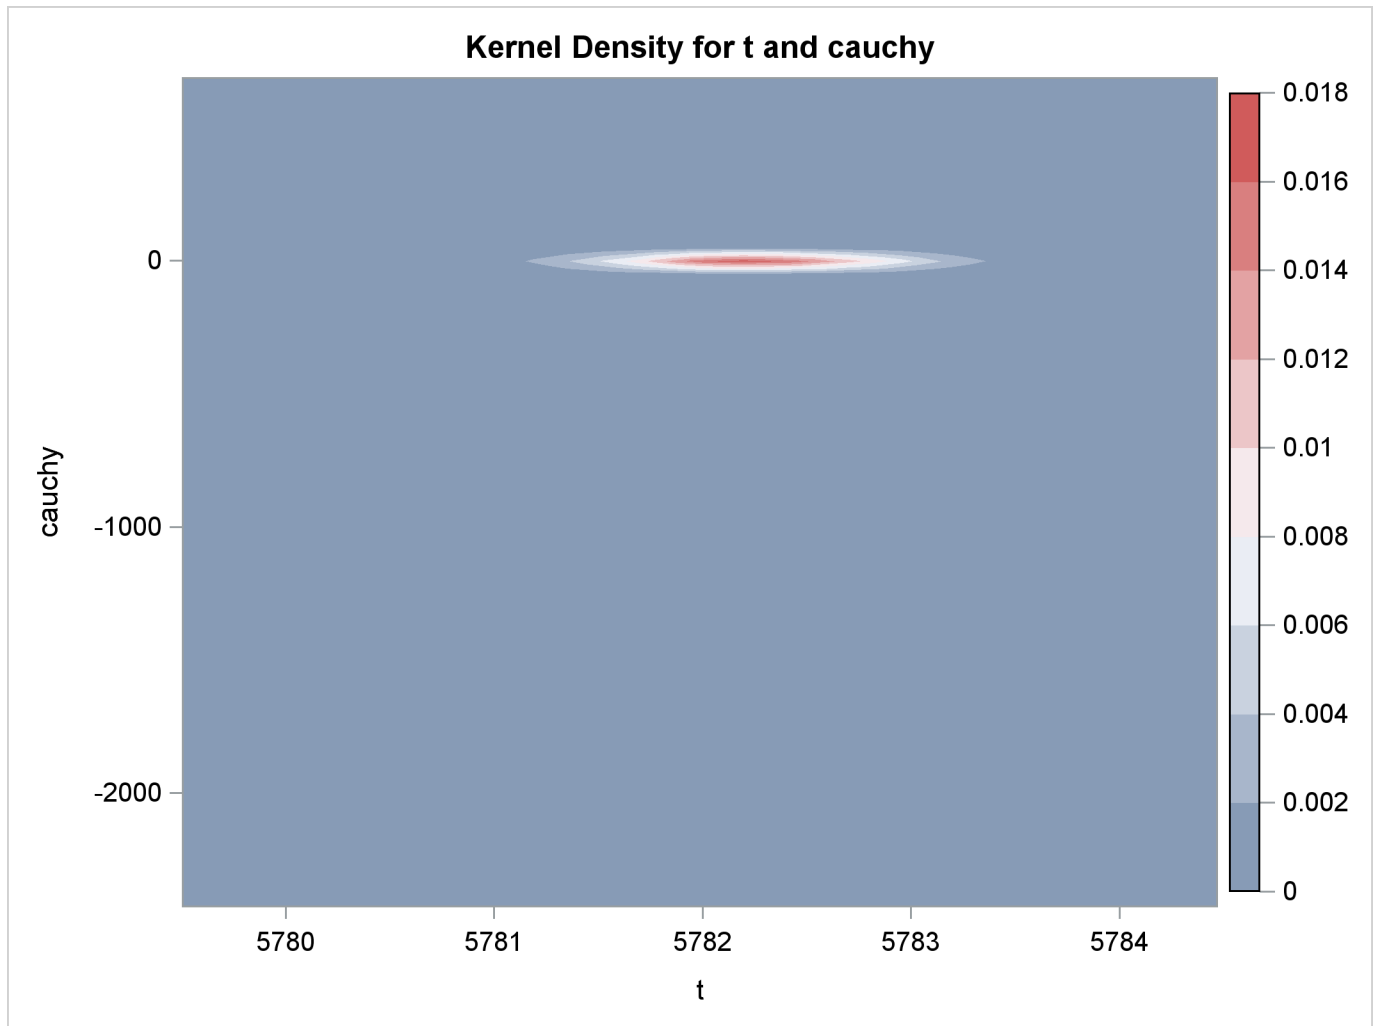
title "T and Cauchy Distribution";

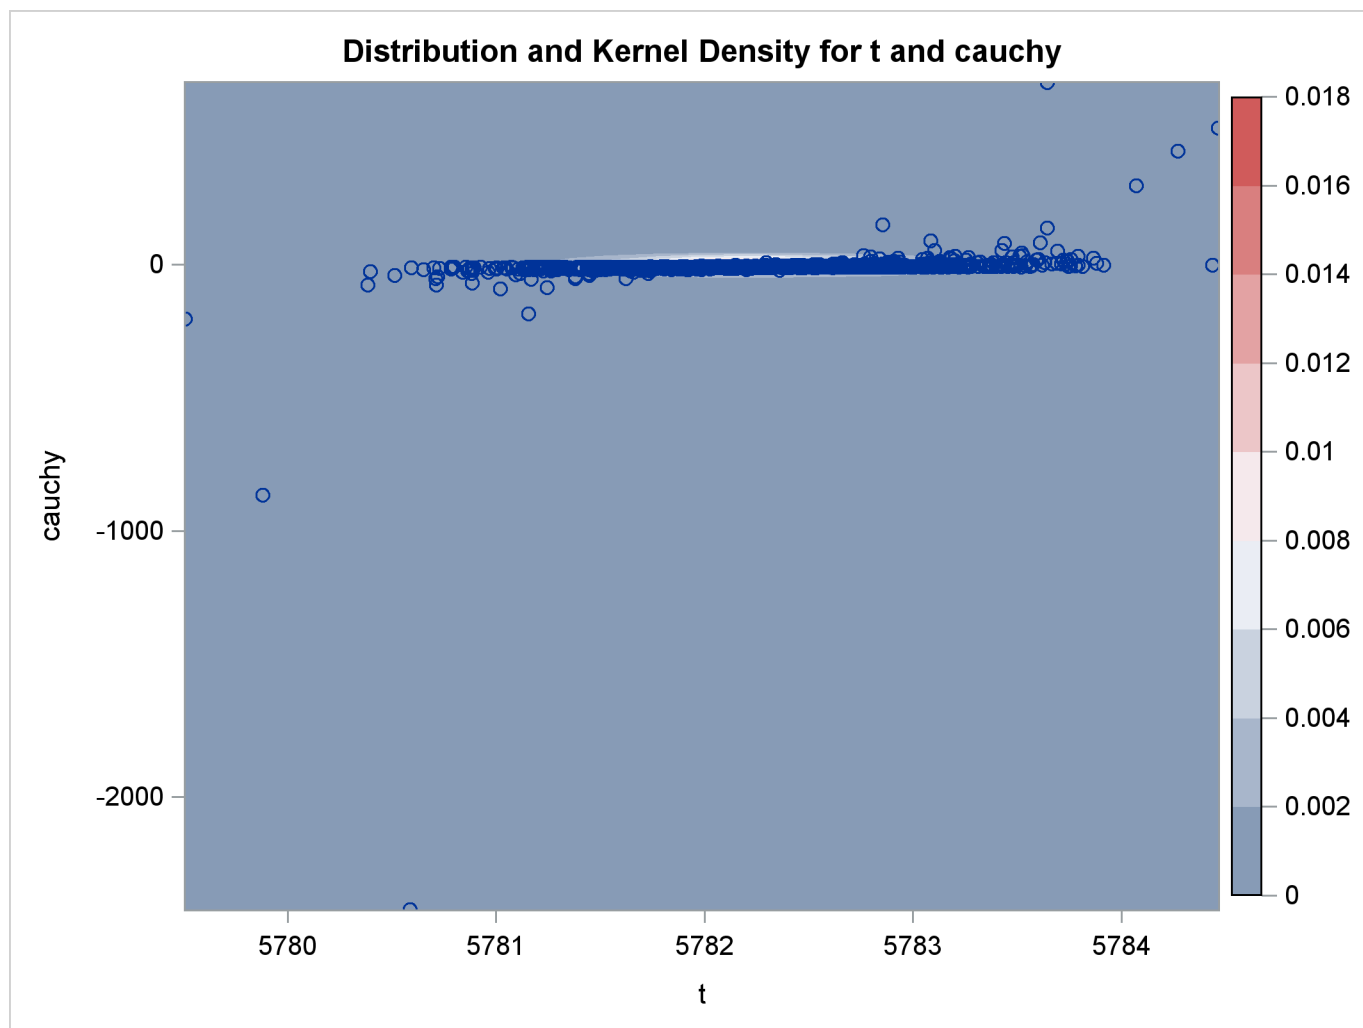
proc kde data=monte;
    univar t          / out=t_dens;
    univar cauchy     / out=cauchy_dens;
    bivar t cauchy    / out=density
                    plots=all;
run;

```

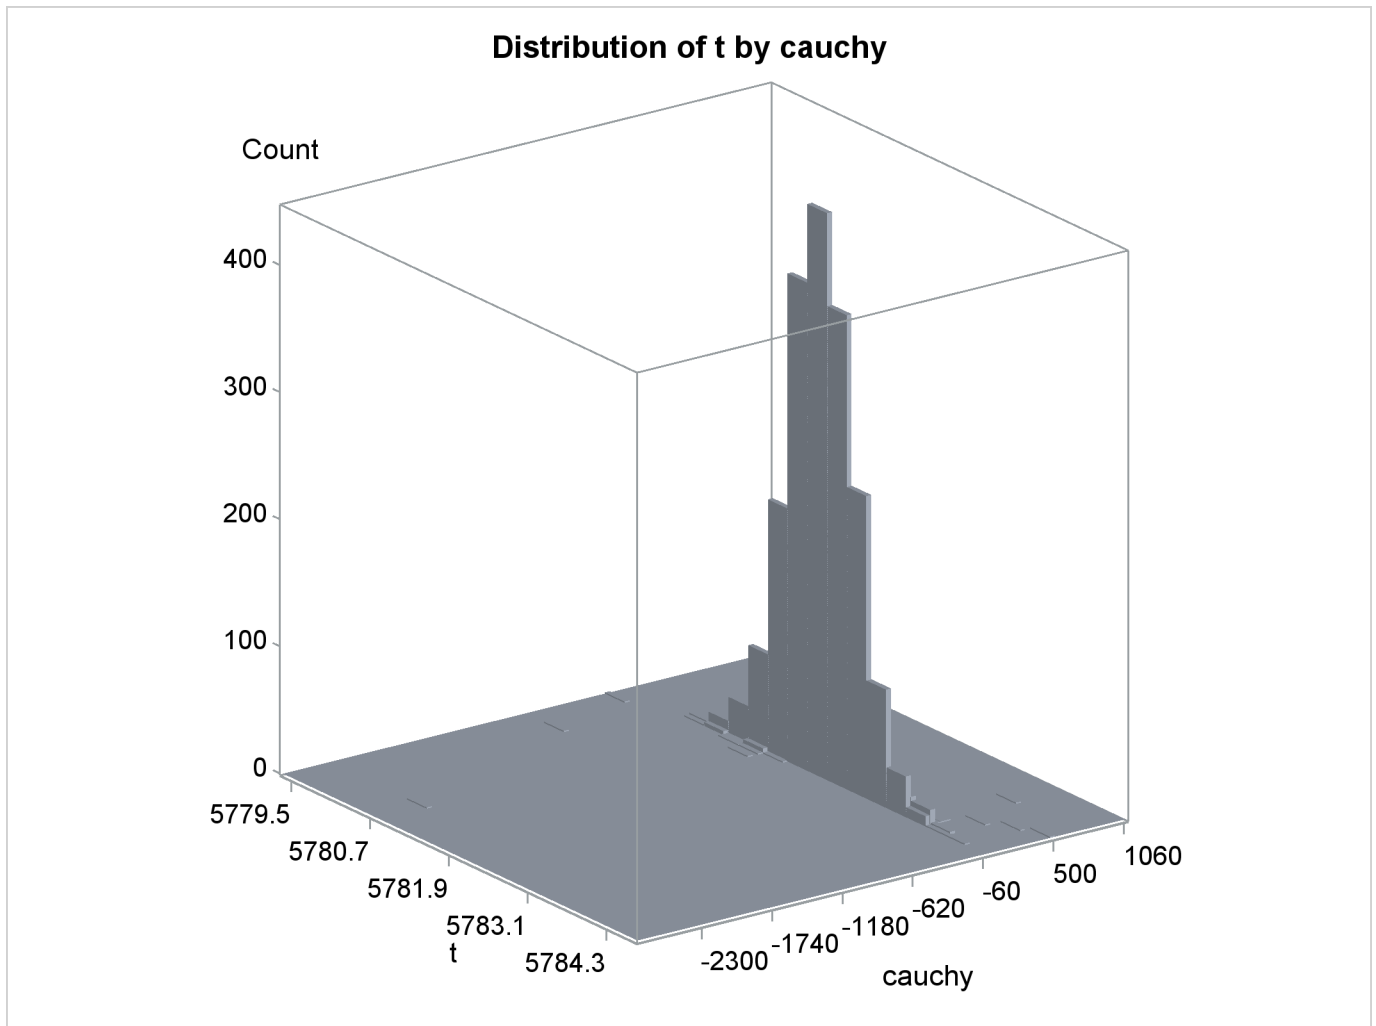
Output 19.14.1 Bivariate Density of t and Cauchy, Distribution of t by Cauchy

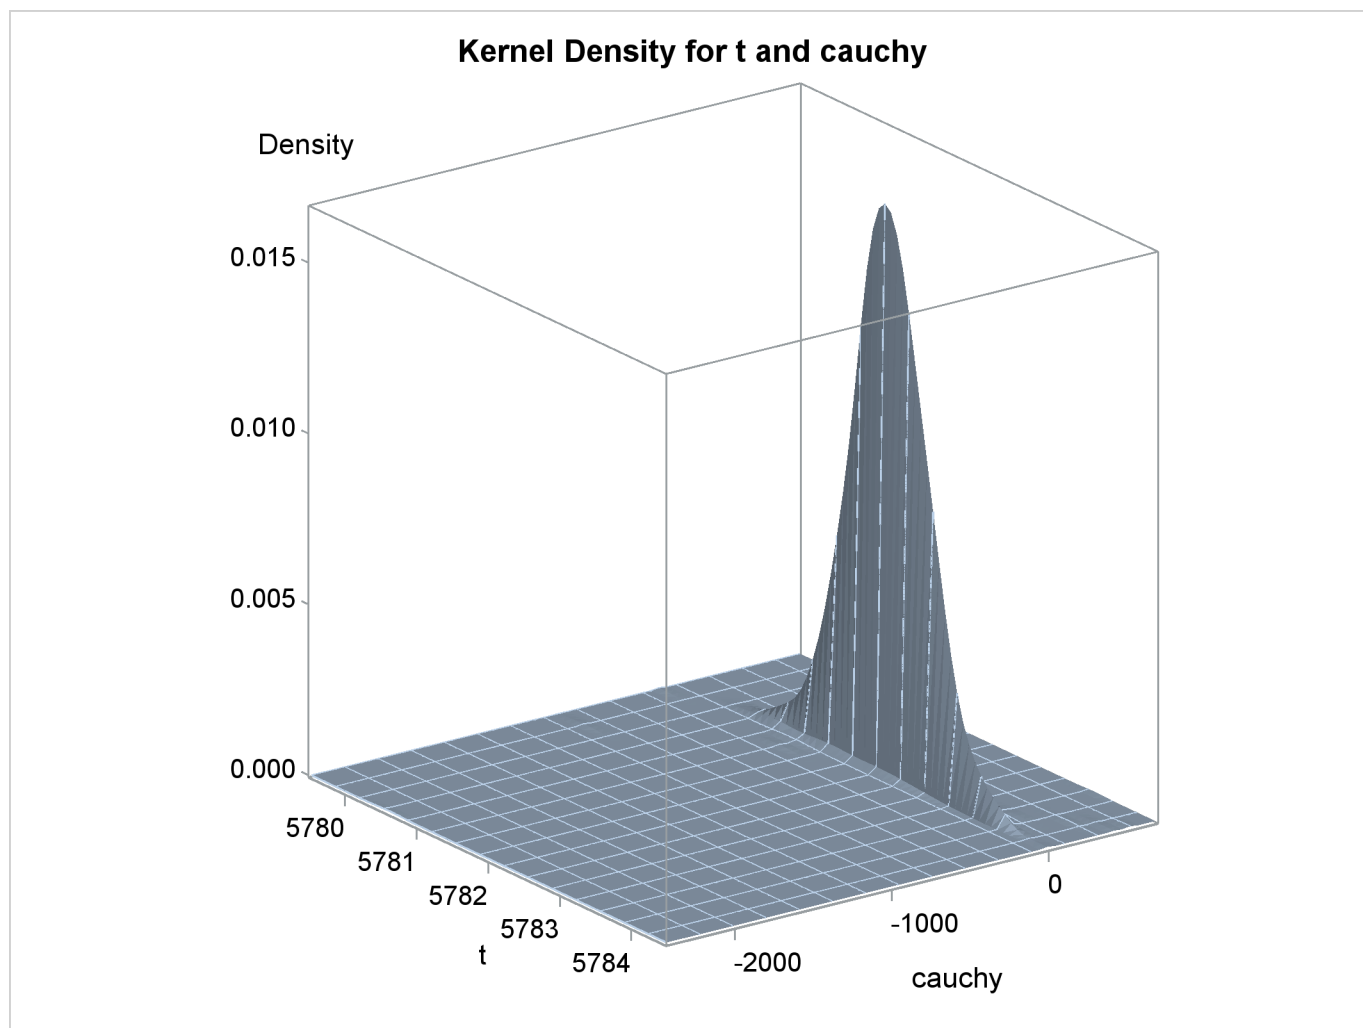
Output 19.14.2 Bivariate Density of t and Cauchy, Kernel Density for t and Cauchy

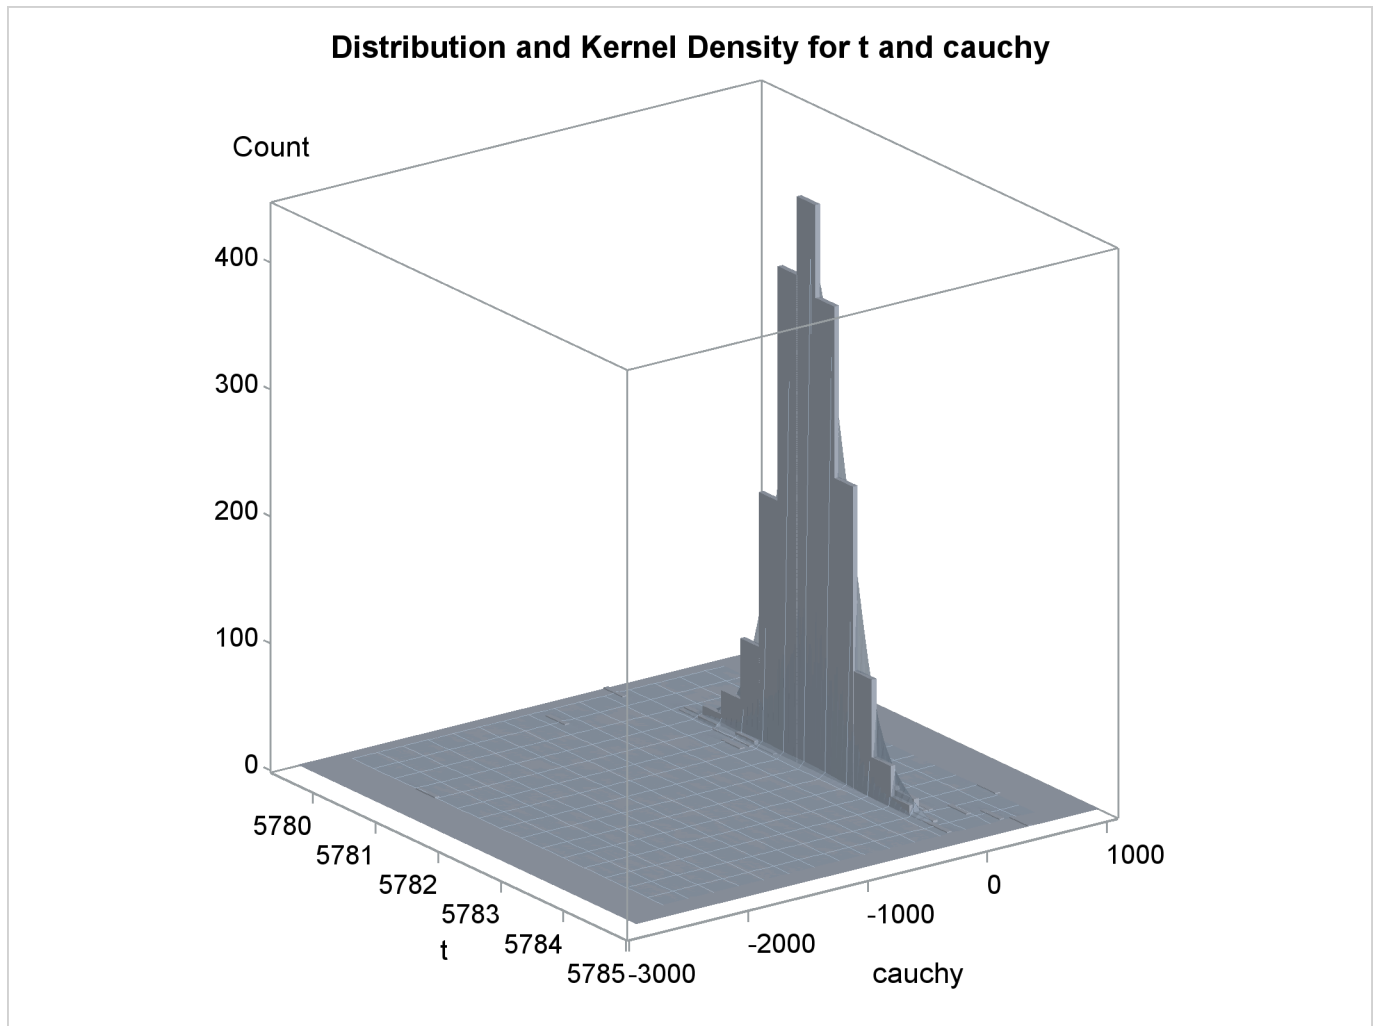


Output 19.14.3 Bivariate Density of t and Cauchy, Distribution and Kernel Density for t and Cauchy

Output 19.14.4 Bivariate Density of t and Cauchy, Distribution of t by Cauchy



Output 19.14.5 Bivariate Density of t and Cauchy, Kernel Density for t and Cauchy

Output 19.14.6 Bivariate Density of t and Cauchy, Distribution and Kernel Density for t and Cauchy

Example 19.15: Simulated Method of Moments—Simple Linear Regression

This example illustrates how to use SMM to estimate a simple linear regression model for the following process:

$$y = a + bx + \epsilon, \epsilon \sim iid N(0, s^2)$$

In the following SAS statements, *ysim* is simulated, and the first moment and the second moment of *ysim* are compared with those of the observed endogenous variable *y*.

```
title "Simple regression model";

data regdata;
  do i=1 to 500;
    x = rannor( 1013 );
```

```

        y = 2 + 1.5 * x + 1.5 * rannor( 1013 );
        output;
    end;
run;

proc model data=regdata;
    parms a b s;
    instrument x;

    ysim = (a+b*x) + s * rannor( 8003 );
    y = ysim;
    eq.ysq = y*y - ysim*ysim;

    fit y ysq / gmm ndraw;
    bound s > 0;
run;

```

Alternatively, the MOMENT statement can be used to specify the moments using the following syntax:

```

proc model data=regdata;
    parms a b s;
    instrument x;

    ysim = (a+b*x) + s * rannor( 8003 );
    y = ysim;
    moment y = (2);

    fit y / gmm ndraw;
    bound s > 0;
run;

```

The output of the MODEL procedure is shown in [Output 19.15.1](#):

Output 19.15.1 PROC MODEL Output

Simple regression model	
The MODEL Procedure	
Model Summary	
Model Variables	1
Parameters	3
Equations	2
Number of Statements	4
Model Variables	Y
Parameters	a b s
Equations	ysq Y
The 2 Equations to Estimate	
Y =	F(a(1), b(x), s)
ysq =	F(a, b, s)
Instruments	1 x

Output 19.15.1 *continued*

Nonlinear GMM Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
a	2.065983	0.0657	31.45	<.0001
b	1.511075	0.0565	26.73	<.0001
s	1.483358	0.0498	29.78	<.0001

Example 19.16: Simulated Method of Moments—AR(1) Process

This example illustrates how to use SMM to estimate an AR(1) regression model for the following process:

$$\begin{aligned}
 y_t &= a + bx_t + u_t \\
 u_t &= \alpha u_{t-1} + \epsilon_t \\
 \epsilon_t &\sim iid N(0, s^2)
 \end{aligned}$$

In the following SAS statements, *ysim* is simulated by using this model, and the endogenous variable *y* is set to be equal to *ysim*. The **MOMENT** statement creates two more moments for the estimation. One is the second moment, and the other is the first-order autocovariance. The **NPRESS=10** option instructs **PROC MODEL** to run the simulation 10 times before *ysim* is compared to the first observation of *y*. Because the initial **zlag(u)** is zero, the first *ysim* is $a + b * x + s * \text{rannor}(8003)$. Without the **NPRESS** option, this *ysim* is matched with the first observation of *y*. With **NPRESS**, this *ysim* and the next nine *ysim* are thrown away, and the moment match starts with the eleventh *ysim* with the first observation of *y*. This way, the initial values do not exert a large influence on the simulated endogenous variables.

```

%let nobs=500;
data ardata;
  lu =0;
  do i=-10 to &nobs;
    x = rannor( 1011 );
    e = rannor( 1011 );
    u = .6 * lu + 1.5 * e;
    Y = 2 + 1.5 * x + u;
    lu = u;
    if i > 0 then output;
  end;
run;

title1 'Simulated Method of Moments for AR(1) Process';

proc model data=ardata ;
  parms a b s 1 alpha .5;
  instrument x;

```

```

u = alpha * zlag(u) + s * rannor( 8003 );
ysim = a + b * x + u;
y = ysim;
moment y = (2) lag1(1);

fit y / gmm npreobs=10 ndraw=10;
bound s > 0, 1 > alpha > 0;
run;

```

The output of the MODEL procedure is shown in [Output 19.16.1](#):

Output 19.16.1 PROC MODEL Output

Simulated Method of Moments for AR(1) Process				
The MODEL Procedure				
Model Summary				
Model Variables	1			
Parameters	4			
Equations	3			
Number of Statements	8			
Program Lag Length	1			
Model Variables	Y			
Parameters (Value)	a b s(1) alpha(0.5)			
Equations	_moment_2 _moment_1 Y			
The 3 Equations to Estimate				
_moment_2 = F(a, b, s, alpha)				
_moment_1 = F(a, b, s, alpha)				
Y = F(a(1), b(x), s, alpha)				
Instruments	1 x			
Nonlinear GMM Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
a	1.632798	0.1038	15.73	<.0001
b	1.513197	0.0698	21.67	<.0001
s	1.427888	0.0984	14.52	<.0001
alpha	0.543985	0.0809	6.72	<.0001

Example 19.17: Simulated Method of Moments—Stochastic Volatility Model

This example illustrates how to use SMM to estimate a stochastic volatility model as in Andersen and Sorensen (1996):

$$\begin{aligned}y_t &= \sigma_t z_t \\ \log(\sigma_t^2) &= a + b \log(\sigma_{t-1}^2) + s u_t \\ (z_t, u_t) &\sim iid N(0, I_2)\end{aligned}$$

This model is widely used in modeling the return process of stock prices and foreign exchange rates. This is called the stochastic volatility model because the volatility is stochastic as the random variable u_t appears in the volatility equation. The following SAS statements use three moments: absolute value, the second-order moment, and absolute value of the first-order autoregressive moment. Note the ADJSMMV option in the FIT statement to request the SMM covariance adjustment for the parameter estimates. Although these moments have closed form solution as shown by Andersen and Sorensen (1996), the simulation approach significantly simplifies the moment conditions.

```
%let nobs=1000;
data _tmpdata;
  a = -0.736; b=0.9; s=0.363;
  ll=sqrt( exp(a/(1-b))) ;
  do i=-10 to &nobs;
    u = rannor( 101 );
    z = rannor( 101 );
    lnssq = a+b*log(ll**2) +s*u;
    st = sqrt(exp(lnssq));
    ll = st;
    y = st * z;
    if i > 0 then output;
  end;
run;

title1 'Simulated Method of Moments for Stochastic Volatility Model';

proc model data=_tmpdata ;
  parms a b .5 s 1;
  instrument _exog_ / intonly;

  u = rannor( 8801 );
  z = rannor( 9701 );
  lsigmasq = xlag(sigmasq,exp(a));
  lnsigmasq = a + b * log(lsigmasq) + s * u;
  sigmasq = exp( lnsigmasq );

  ysim = sqrt(sigmasq) * z;
  eq.m1 = abs(y) - abs(ysim);
  eq.m2 = y**2 - ysim**2;
  eq.m5 = abs(y*lag(y))-abs(ysim*lag(ysim));
```



```

title1 'SMM for Duration Model with Unobserved Heterogeneity';

%let nobs=1000;
data durationdata;
  b=0.9; s=0.5;
  do i=1 to &nobs;
    u = rannor( 1011 );
    v = ranuni( 1011 );
    x = 2 * ranuni( 1011 );
    y = -exp(-b * x + s * u) * log(v);
    output;
  end;
run;

proc model data=durationdata;
  parms b .5 s 1;
  instrument x;

  u = rannor( 1011 );
  v = ranuni( 1011 );
  y = -exp(-b * x + s * u) * log(v);

  moment y = (2 3 4);
  fit y / gmm ndraw=10 ;* maxiter=500;
  bound s > 0, b > 0;
run;

```

The output of the MODEL procedure is shown in [Output 19.18.1](#).

Output 19.18.1 PROC MODEL Output

```

SMM for Duration Model with Unobserved Heterogeneity

The MODEL Procedure

Model Summary

Model Variables      1
Parameters           2
Equations            4
Number of Statements 9

Model Variables      y
Parameters(Value)    b(0.5) s(1)
Equations            _moment_3 _moment_2 _moment_1 y

The 4 Equations to Estimate

_moment_3 = F(b, s)
_moment_2 = F(b, s)
_moment_1 = F(b, s)
y = F(b, s)
Instruments 1 x

```

Output 19.18.1 *continued*

Nonlinear GMM Parameter Estimates				
Parameter	Estimate	Approx Std Err	t Value	Approx Pr > t
b	0.92983	0.0331	28.08	<.0001
s	0.341825	0.0608	5.62	<.0001

Example 19.19: EMM Estimation of a Stochastic Volatility Model

The efficient method of moments (EMM), introduced by Bansal et al. (1993 and 1995) and Gallant and Tauchen (2001), can be considered a variant of SMM. The idea is to match the efficiency of the maximum likelihood (ML) estimation with the flexibility of the SMM procedure. ML itself can be interpreted as a method of moments procedure, where the *score vector*, the vector of derivatives of the log-likelihood function with respect to the parameters, provides the exactly identifying moment conditions. EMM employs an auxiliary (or pseudo) model that closely matches the true model. The score vector of the auxiliary model provides the moment conditions in the SMM step.

This example uses the SMM feature of PROC MODEL to estimate the simple stochastic volatility (SV) model of [Example 19.17](#) with the EMM method.

Suppose that your data are the time series $\{y_1, y_2, \dots, y_n\}$, and the model that you want to estimate, or the structural model, is characterized by the vector of parameters θ . For the SV model, θ is given by (a, b, s) .

The first step of the EMM method is to fit the data with an auxiliary model (or score generator) that has transition density $f(y_t|Y_{t-1}, \eta)$, parametrized by the pseudo parameter η , where $Y_{t-1} = \{y_{t-1}, \dots, y_1\}$. The auxiliary model must approximate the true data-generating process as closely as possible and be such that ML estimation is feasible.

The only identification requirement is that the dimension of the pseudo parameter η be greater than or equal to that of the structural parameter θ .

Andersen, Chung, and Sorensen (1999) showed that the GARCH(1,1) is an appropriate auxiliary model that leads to a good performance of the EMM estimator for the SV model.

The analytical expression for the GARCH(1,1) model with mean zero is

$$\begin{aligned} y_t &= \sigma_t z_t \\ \sigma_t^2 &= \omega + \alpha y_{t-1} + \beta \sigma_{t-1}^2 \end{aligned}$$

The pseudo parameter vector η is given by (ω, α, β) .

One advantage of such a class of models is that the conditional density of y_t is Gaussian—that is,

$$f(y_t|Y_{t-1}, \eta) \propto \frac{1}{\sigma_t} \exp\left(-\frac{y_t^2}{2\sigma_t^2}\right)$$

Therefore the score vector can easily be computed analytically.

The AUTOREG procedure provides the ML estimates, $\hat{\eta}_n$. The output is stored in the garchout data set, while the estimates are stored in the garchest data set.

```

title1 'Efficient Method of Moments for Stochastic Volatility Model';

/* estimate GARCH(1,1) model */
proc autoreg data=svdata(keep=y)
    outest=garchest
    noprint covout;
    model y = / noint garch=(q=1,p=1);
    output out=garchout cev=gsigmasq r=resid;
run;

```

If the pseudo model is close enough to the structural model, in a suitable sense, Gallant and Long (1997) showed that a consistent estimator of the asymptotic covariance matrix of the sample pseudo-score vector can be obtained from the formula

$$\hat{V}_n = \frac{1}{n} \sum_{t=1}^n s_f(Y_t, \hat{\eta}_n) s_f(Y_t, \hat{\eta}_n)'$$

where $s_f(Y_t, \hat{\eta}_n) = (\partial/\partial \eta_n) \log f(y_t|Y_{t-1}, \hat{\eta}_n)$ denotes the score function of the auxiliary model computed at the ML estimates.

The ML estimates of the GARCH(1,1) model are used in the following SAS statements to compute the variance-covariance matrix \hat{V}_n .

```

/* compute the V matrix */
data vvalues;
    set garchout(keep=y gsigmasq resid);

    /* compute scores of GARCH model */
    score_1 = (-1 + y**2/gsigmasq)/ gsigmasq;
    score_2 = (-1 + y**2/gsigmasq)*lag(gsigmasq) / gsigmasq;
    score_3 = (-1 + y**2/gsigmasq)*lag(y**2) / gsigmasq;

    array score{*} score_1-score_3;
    array v_t{*} v_t_1-v_t_6;
    array v{*} v_1-v_6;

    /* compute external product of score vector */
    do i=1 to 3;
        do j=i to 3;
            v_t{j*(j-1)/2 + i} = score{i}*score{j};
        end;
    end;

    /* average them over t */
    do s=1 to 6;
        v{s}+ v_t{s}/&nobs;
    end;
run;

```

The $\hat{\mathbf{V}}$ matrix must be formatted to be used with the VDATA= option of the MODEL procedure. See the section “VDATA= Input data set” on page 1186 for more information about the VDATA= data set.

```
/* Create a VDATA dataset acceptable to PROC MODEL */

/* Transpose the last obs in the dataset */
proc transpose data=vvalues(firstobs=&nobs keep=v_1-v_6)
    out=tempv;
run;

/* Add eq and inst labels */
data vhat;
    set tempv(drop=_name_);
    value = coll;
    drop coll;
    input _type_ $ eq_row $ eq_col $ inst_row $ inst_col $; *$;
    datalines;
        gmm m1 m1 1 1 /* intcpt is the only inst we use */
        gmm m1 m2 1 1
        gmm m2 m2 1 1
        gmm m1 m3 1 1
        gmm m2 m3 1 1
        gmm m3 m3 1 1
    ;
```

The last step of the EMM procedure is to estimate θ by using SMM, where the moment conditions are given by the scores of the auxiliary model.

Given a fixed value of the parameter vector θ and an arbitrarily large T , one can simulate a series $\{\hat{y}_1(\theta), \hat{y}_2(\theta), \dots, \hat{y}_T(\theta)\}$ from the structural model. The EMM estimator is the value $\hat{\theta}_n$ that minimizes the quantity

$$m_T(\theta, \hat{\eta}_n)' \hat{\mathbf{V}}_n^{-1} m_T(\theta, \hat{\eta}_n)$$

where

$$m_T(\theta, \hat{\eta}_n) = \frac{1}{T} \sum_{k=1}^T s_f(\hat{Y}_k(\theta), \hat{\eta}_n)$$

is the sample moment condition evaluated at the fixed estimated pseudo parameter $\hat{\eta}_n$. Note that the target function depends on the parameter θ only through the simulated series \hat{y}_k .

The following statements generate a data set that contains $T = 20,000$ replicates of the estimated pseudo parameter $\hat{\eta}_n$ and that is then input to the MODEL procedure. The EMM estimates are found by using the SMM option of the FIT statement. The $\hat{\mathbf{V}}_n$ matrix computed above serves as weighting matrix by using the VDATA= option, and the scores of the GARCH(1,1) auxiliary model evaluated at the ML estimates are the moment conditions in the GMM step.

Since the number of structural parameters to estimate (3) is equal to the number of moment equations (3) times the number of instruments (1), the model is exactly identified and the objective function has value zero at the minimum.

For simplicity, the starting values are set to the true values of the parameters.


```

/* USE SMM TO FIND EMM ESTIMATES */

/* Generate dataset of length T */
data emm;
    set garchest(obs=1 keep = _ah_0 _ah_1 _gh_1 _mse_);
    do i=1 to 20000;
        output;
    end;
    drop i;
run;

title2 'EMM estimates';
/* Find the EMM estimates */
proc model data=emm maxiter=1000;
    parms a -0.736 b 0.9 s 0.363;
    instrument _exog_ / intonly;

    /* Describe the structural model */
    u = rannor( 8801 );
    z = rannor( 9701 );
    lsigmasq = xlag(sigmatq,exp(a));
    lnsigmatq = a + b * log(lsigmasq) + s * u;
    sigmasq = exp( lnsigmatq );
    ysim = sqrt(sigmatq) * z;

    /* Volatility of the GARCH model */
    gsigmasq = _ah_0 + _gh_1*xlag(gsigmasq, _mse_)
        + _ah_1*xlag(ysim**2, _mse_);

    /* Use scores of the GARCH model as moment conditions */
    eq.m1 = (-1 + ysim**2/gsigmasq)/ gsigmasq;
    eq.m2 = (-1 + ysim**2/gsigmasq)*xlag(gsigmasq, _mse_) / gsigmasq;
    eq.m3 = (-1 + ysim**2/gsigmasq)*xlag(ysim**2, _mse_) / gsigmasq;

    /* Fit scores using SMM and estimated Vhat */
    fit m1 m2 m3 / gmm npreobs=10 ndraw=1 /* smm options */
        vdata=vhat /* use estimated Vhat */
        kernel=(bart,0,) /* turn smoothing off */;
    bounds s > 0, 1>b>0;
run;

```

The output of the MODEL procedure is shown in [Output 19.19.1](#).

Output 19.19.1 PROC MODEL Output

```

Efficient Method of Moments for Stochastic Volatility Model
      EMM estimates

      The MODEL Procedure

      Model Summary

Parameters                                3
Equations                                3
Number of Statements                      11

Parameters(Value)  a(-0.736) b(0.9) s(0.363)
Equations          m1 m2 m3

      The 3 Equations to Estimate

              m1 = F(a, b, s)
              m2 = F(a, b, s)
              m3 = F(a, b, s)
Instruments      1

      Nonlinear GMM Parameter Estimates

Parameter      Estimate      Approx      Approx
                  Std Err      t Value      Pr > |t|

a              -0.56165        0.0160      -35.11      <.0001
b               0.921532        0.00217     425.26      <.0001
s               0.344669        0.00674     51.11      <.0001

```

Example 19.20: Illustration of ODS Graphics

This example illustrates graphical output from PROC MODEL. This is a continuation of the section “[Nonlinear Regression Analysis](#)” on page 1029. For information about the graphics available in the MODEL procedure, see the section “[ODS Graphics](#)” on page 1192.

The following statements show how to generate ODS Graphics plots with the MODEL procedure. The plots are displayed in [Output 19.20.1](#) and [Output 19.20.2](#). Note that the variable date in the ID statement is used to define the horizontal tick mark values when appropriate.

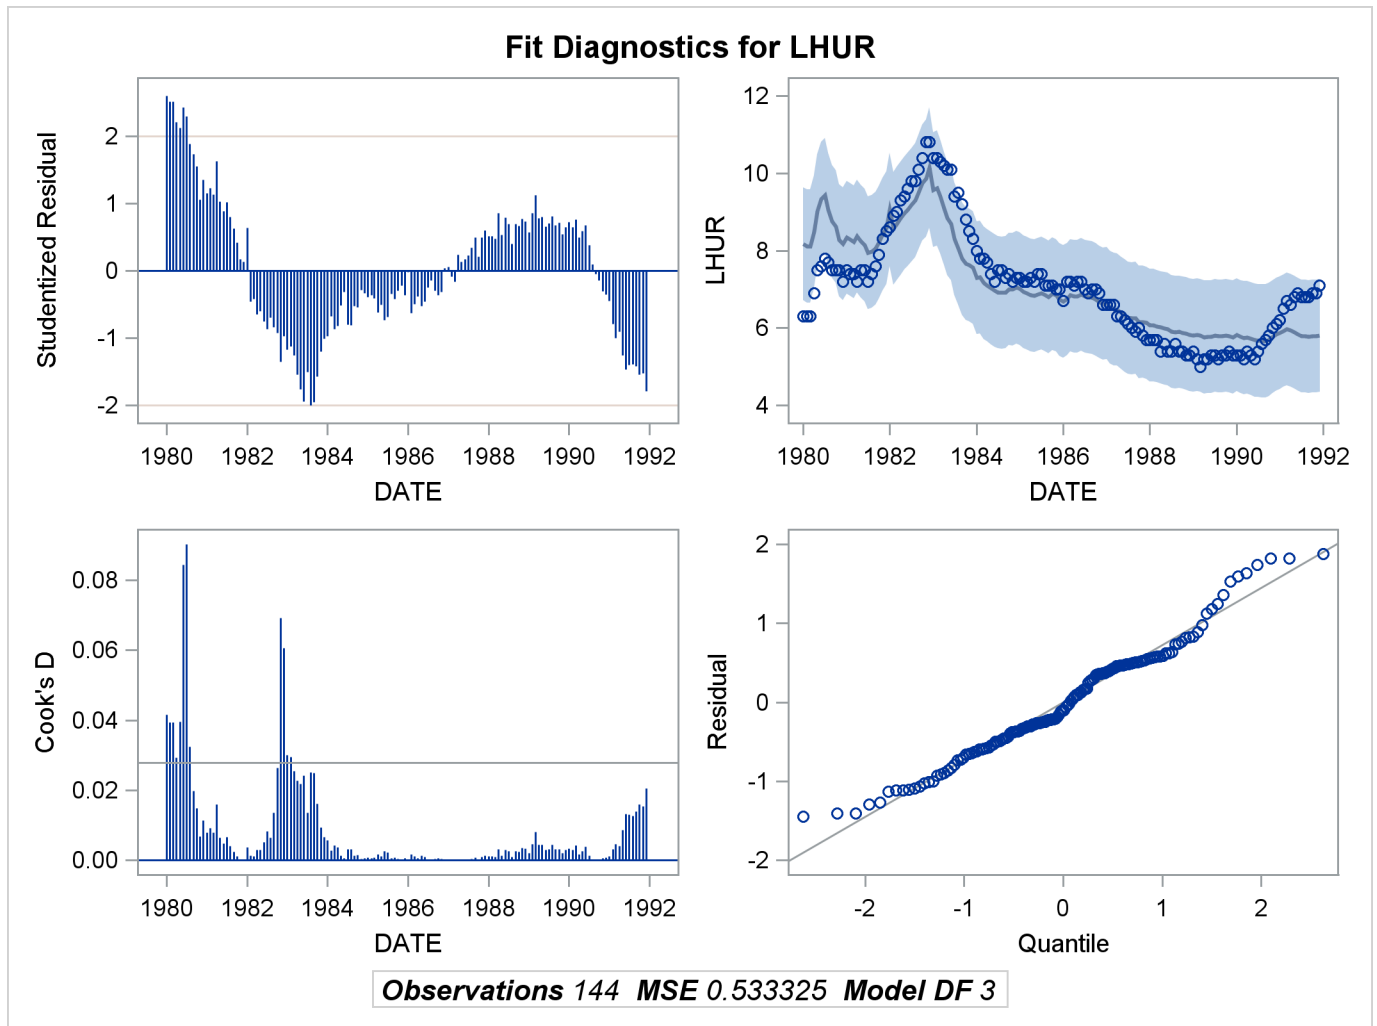
```

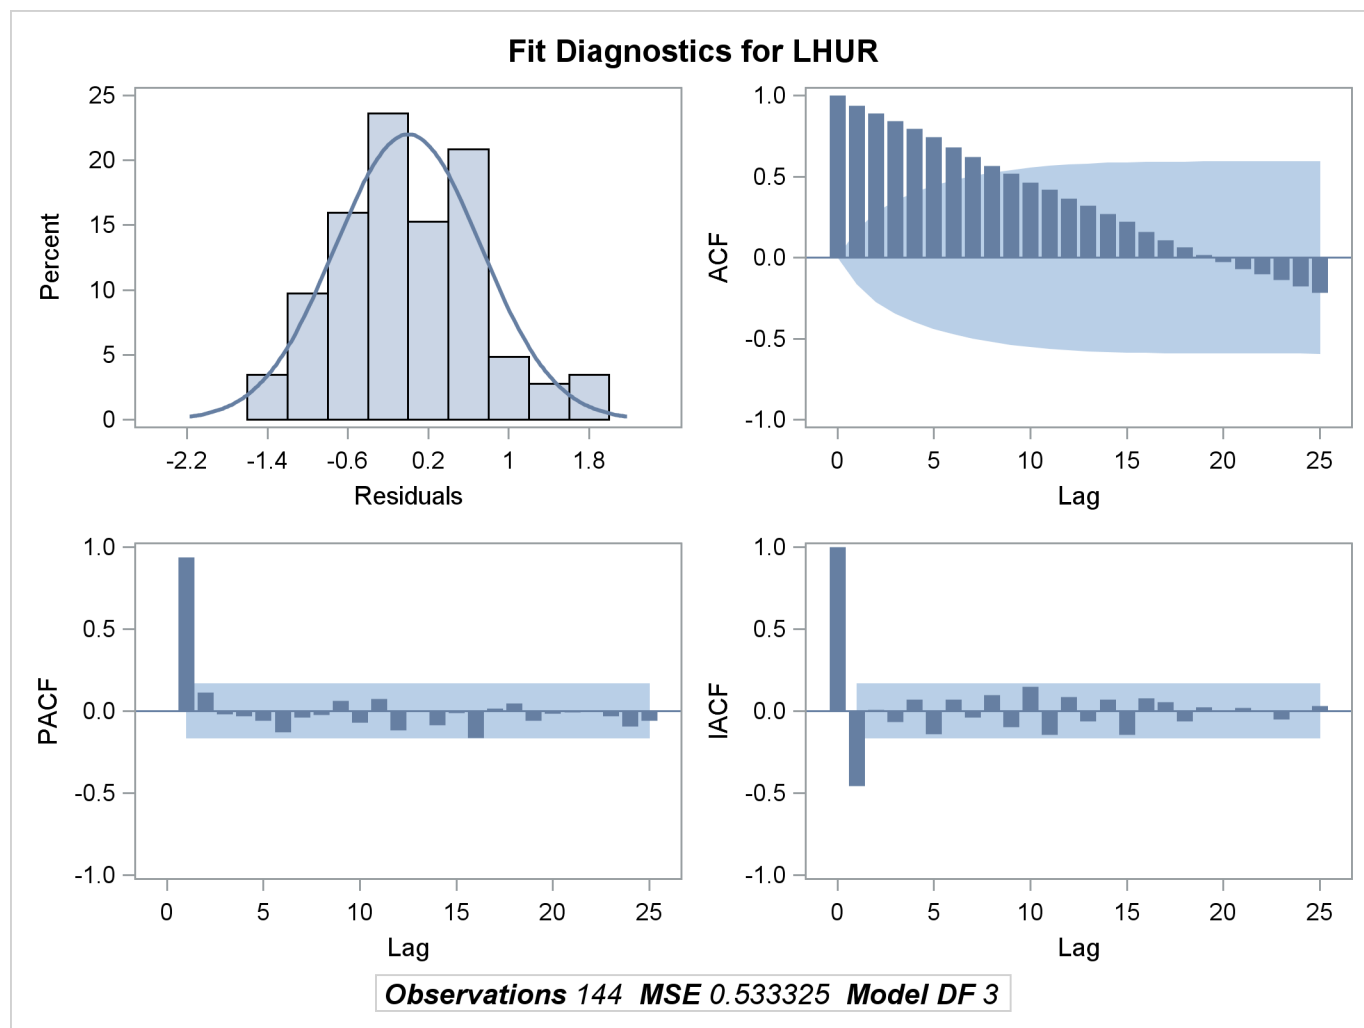
title1 'Example of Graphical Output from PROC MODEL';

proc model data=sashelp.citimon;
  lhur = 1/(a * ip + b) + c;
  fit lhur;
  id date;
run;

```

Output 19.20.1 Diagnostics Plots



Output 19.20.2 Diagnostics Plots

You can also obtain the plots in the diagnostics panel as separate graphs by specifying the PLOTS(UNPACK) option. These plots are displayed in [Output 19.20.3](#) through [Output 19.20.10](#).

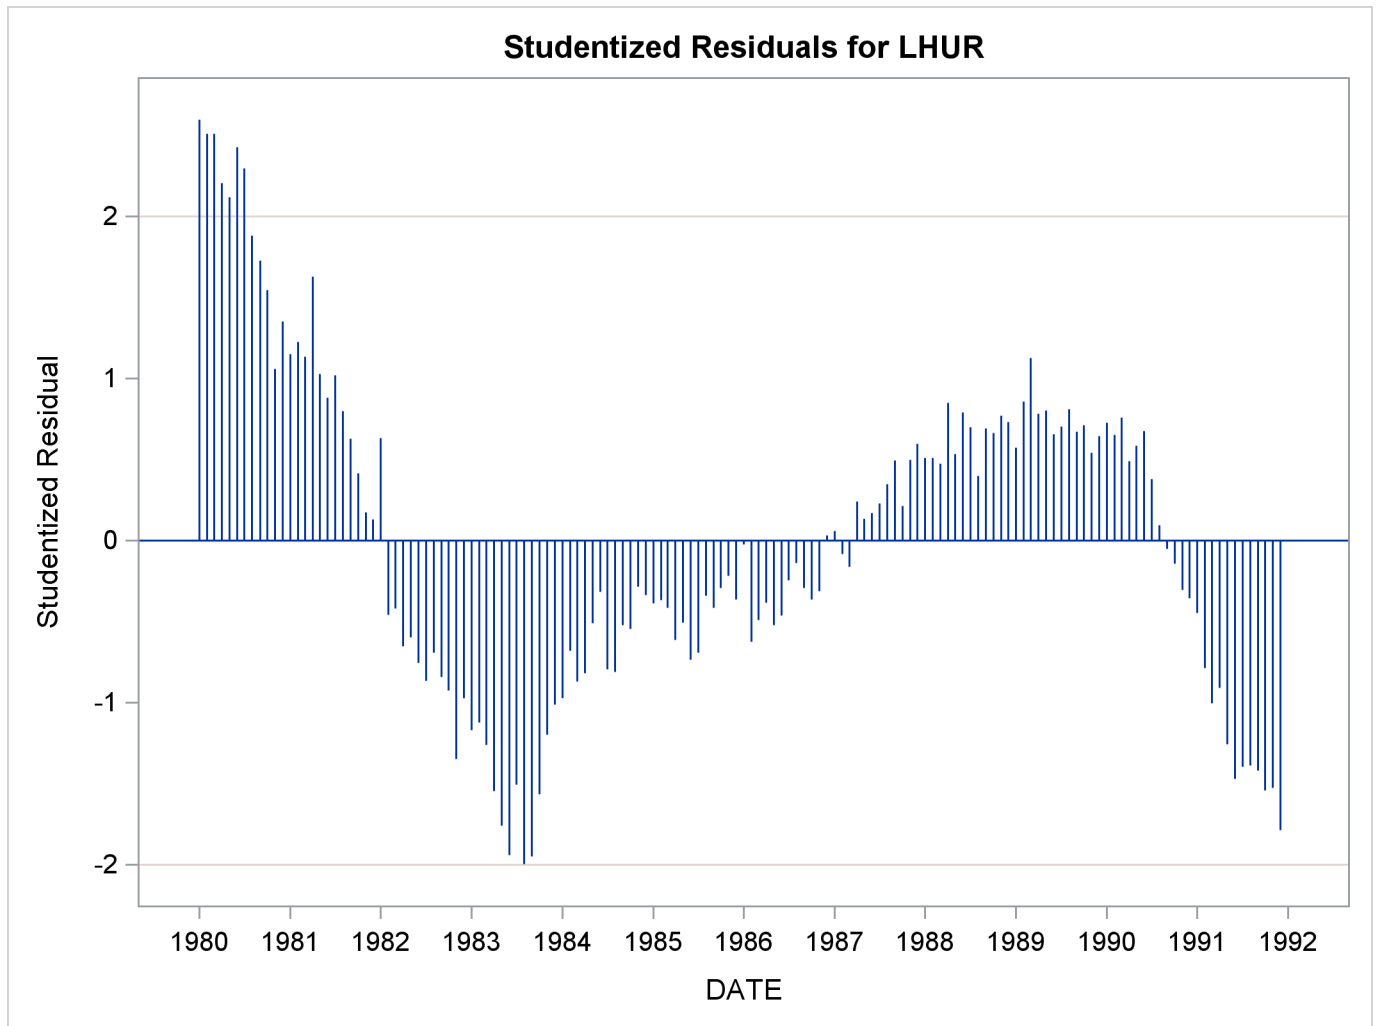
```

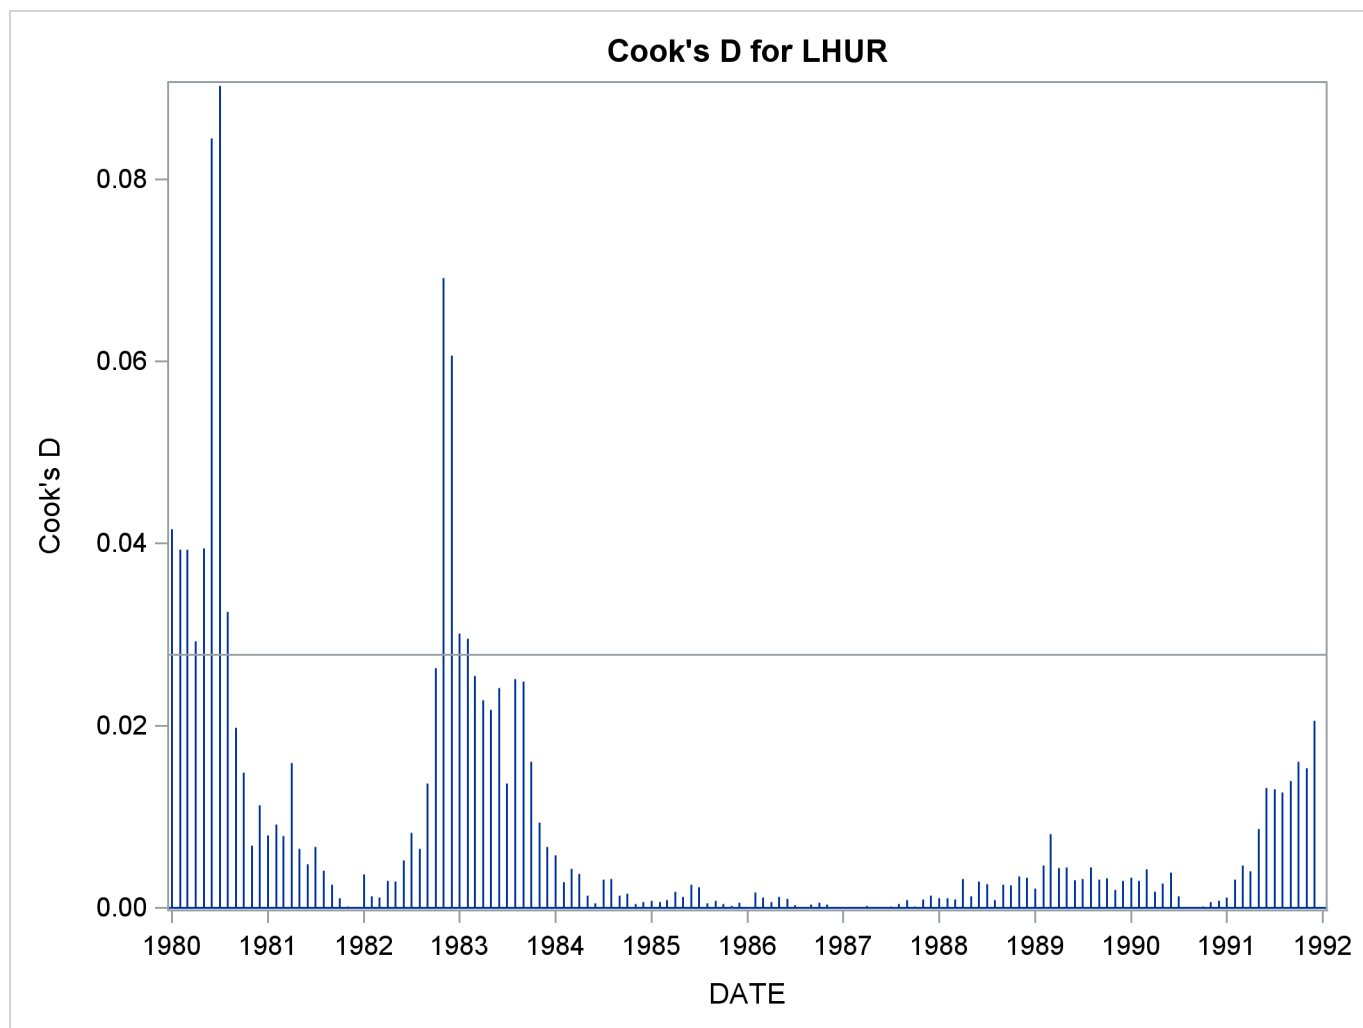
title1 'Unpacked Graphical Output from PROC MODEL';

proc model data=sashelp.citimon plots(unpack);
  lhur = 1/(a * ip + b) + c;
  fit lhur;
  id date;
run;

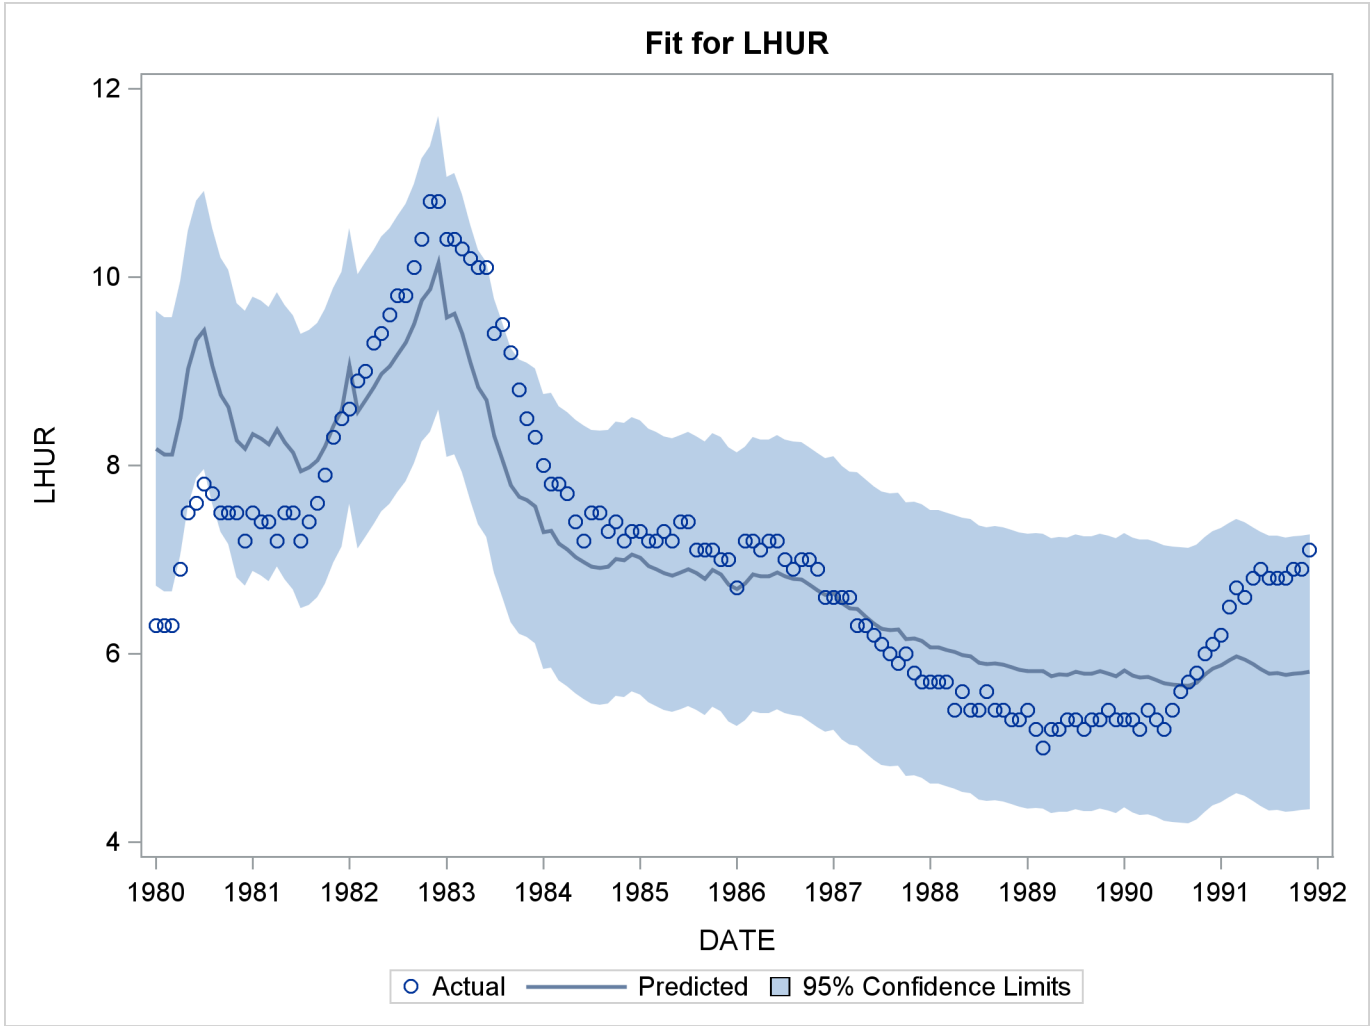
```

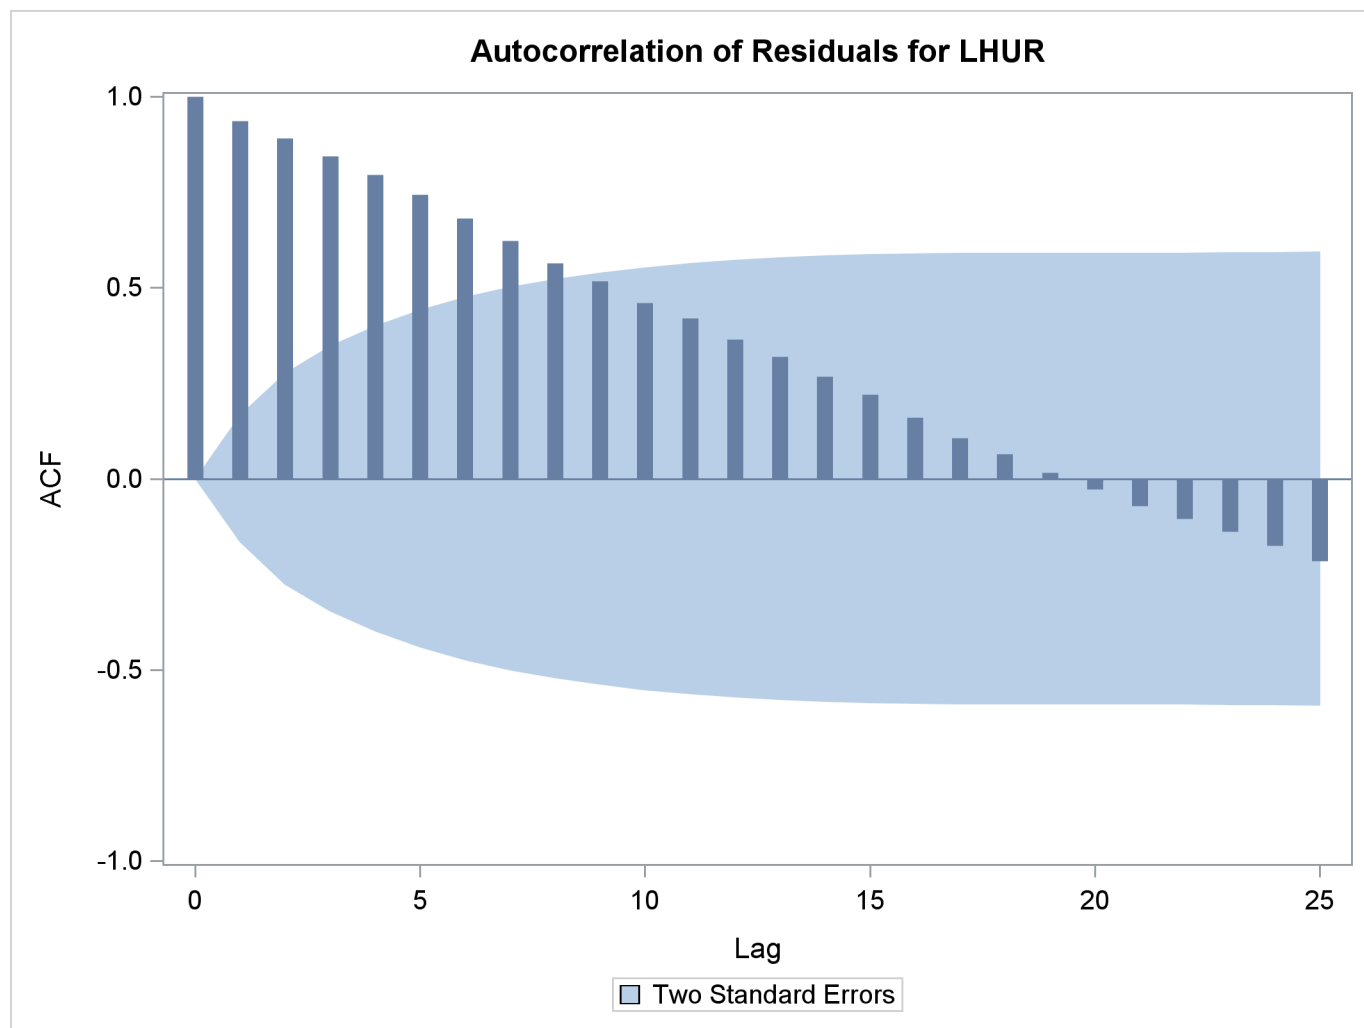
Output 19.20.3 Studentized Residuals Plot

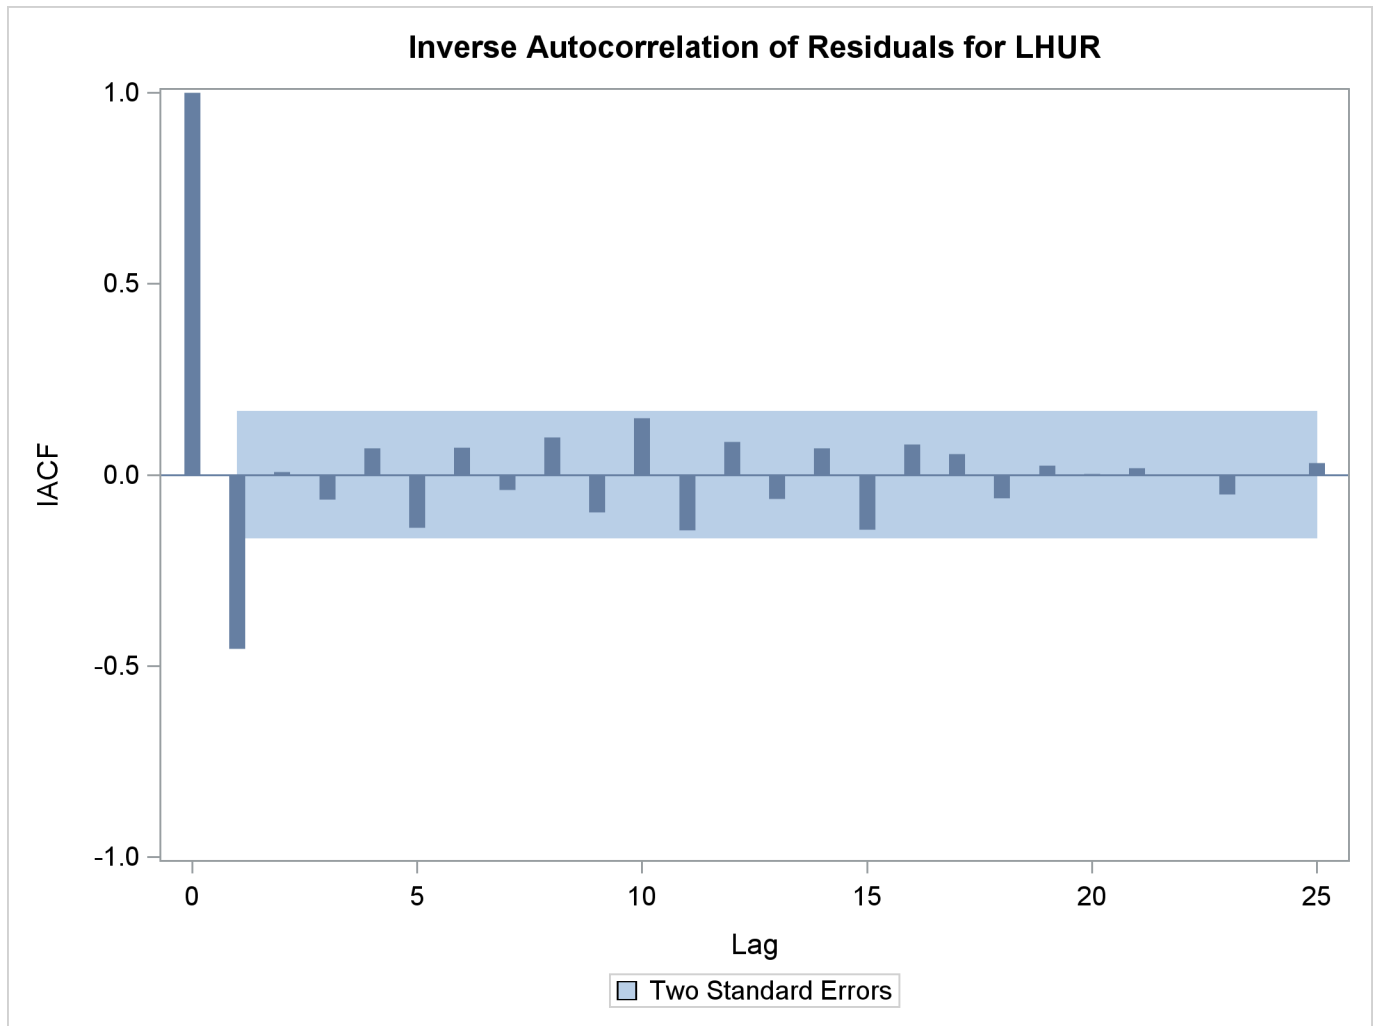


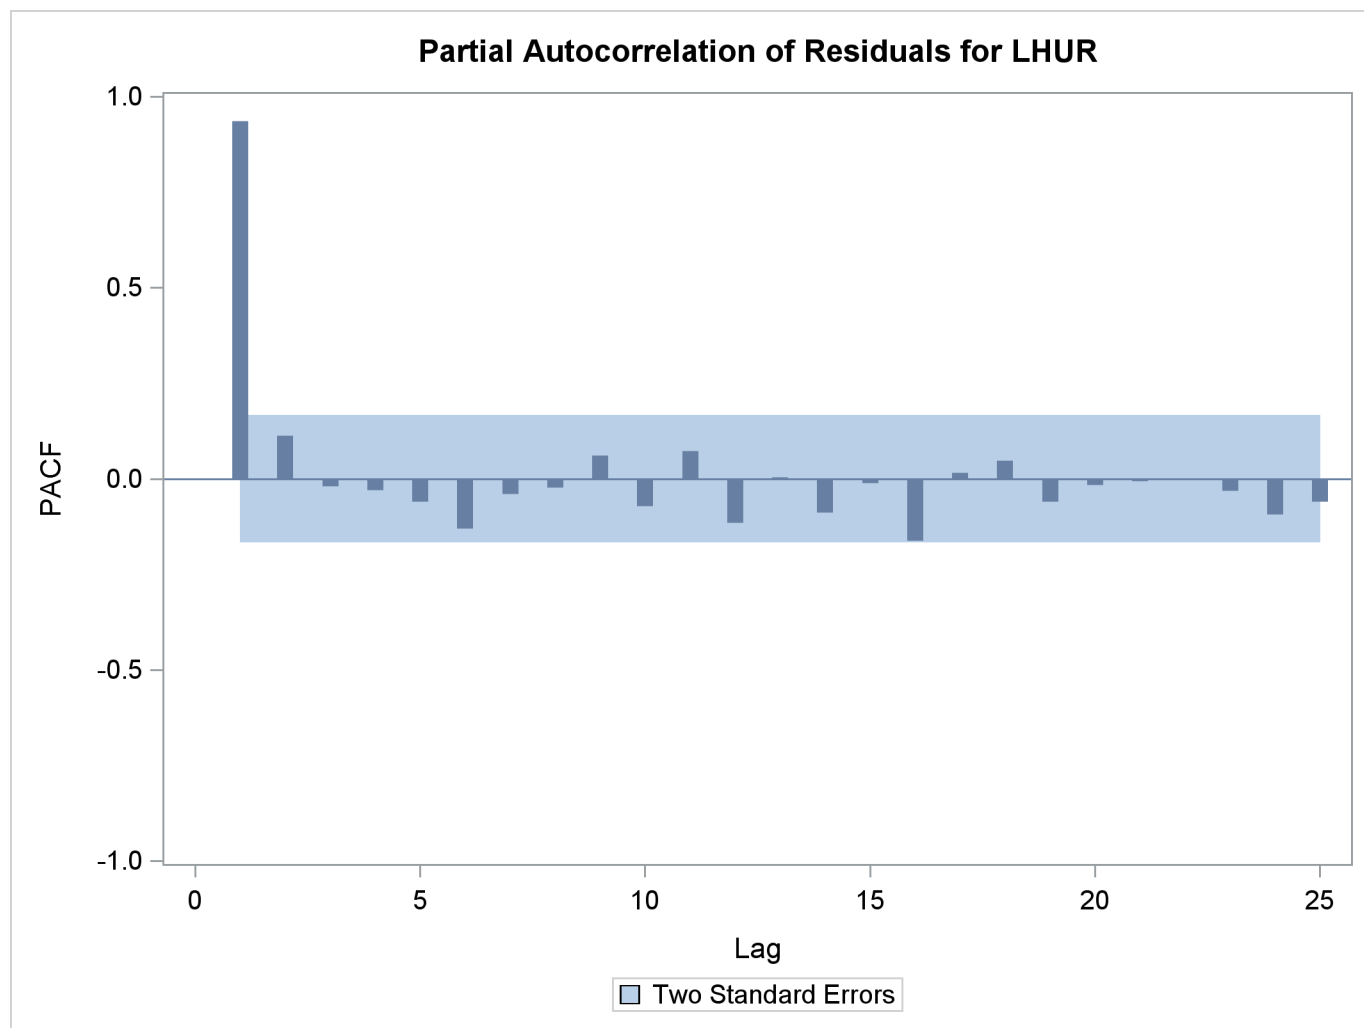
Output 19.20.4 Cook's D Plot

Output 19.20.5 Predicted versus Actual Plot

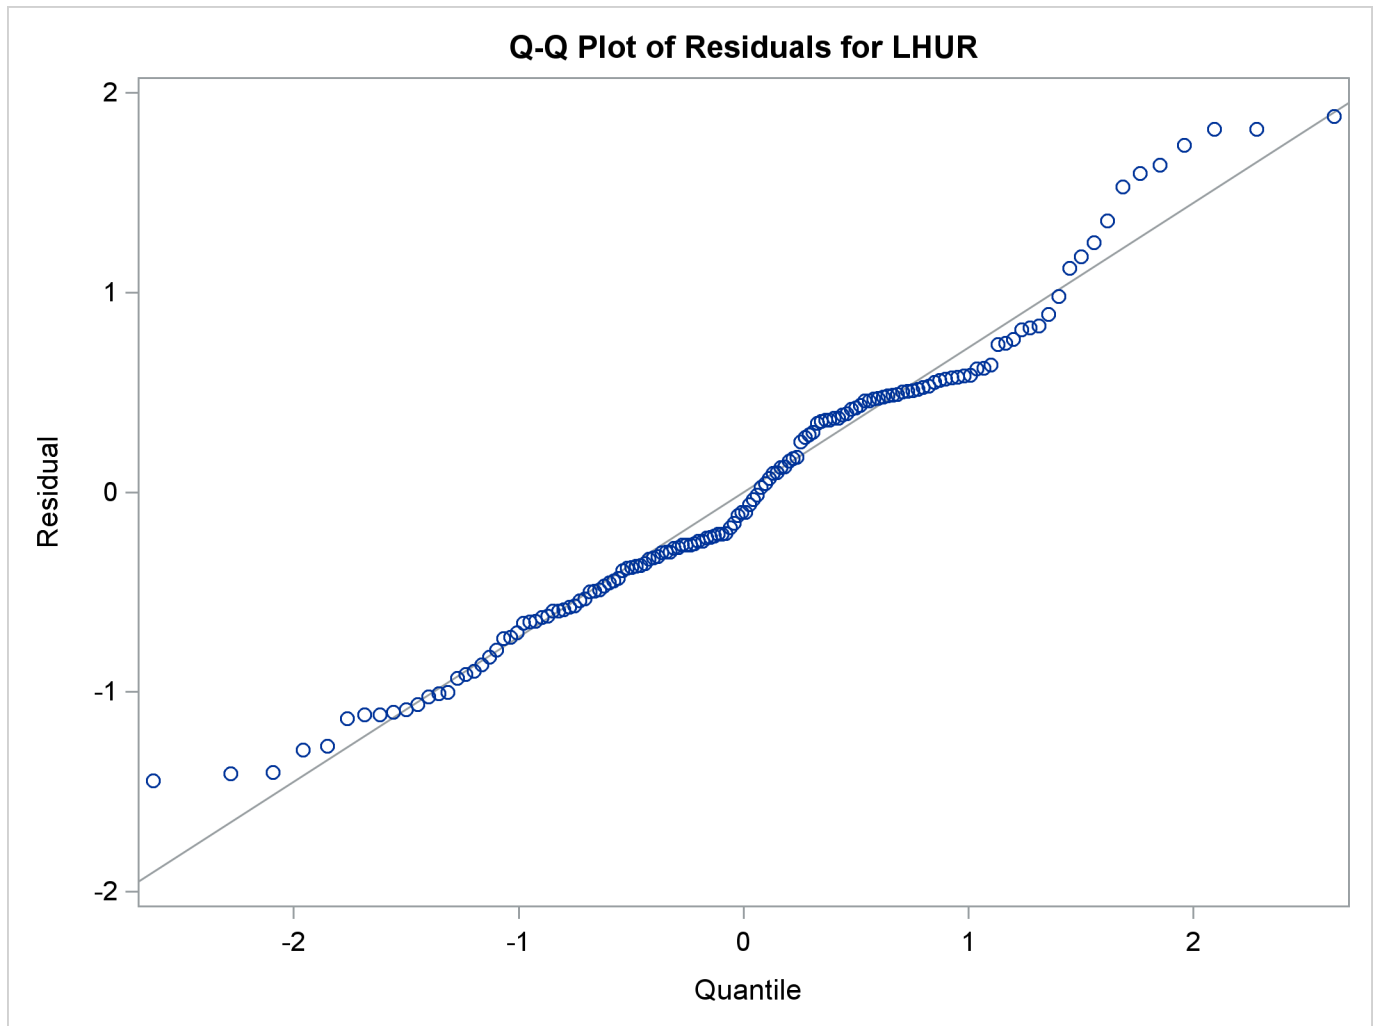


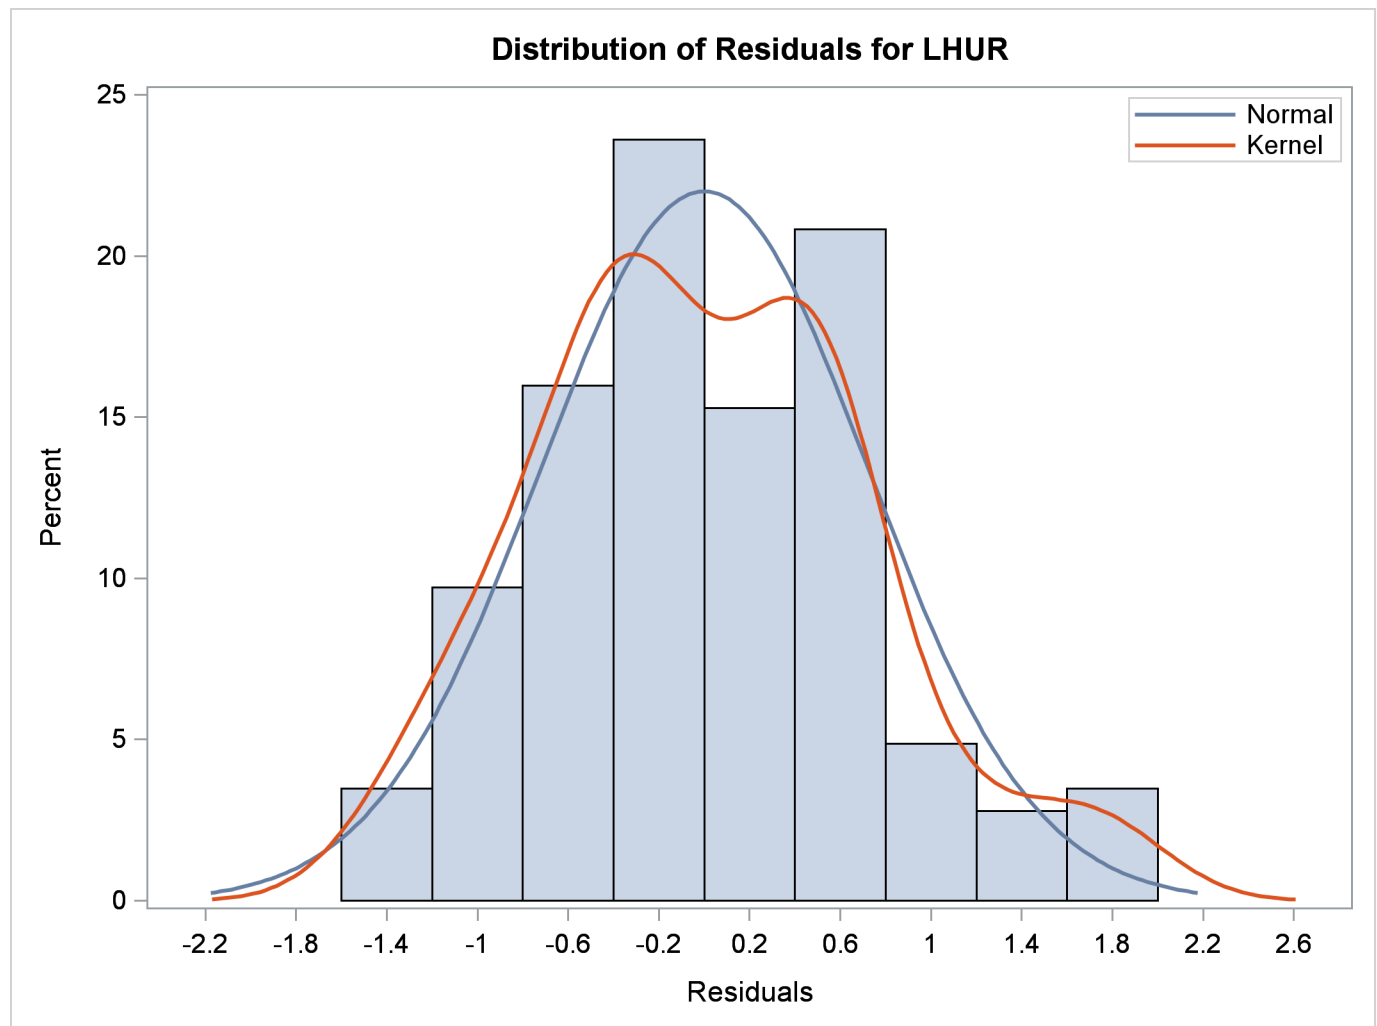
Output 19.20.6 Autocorrelation of Residuals Plot

Output 19.20.7 Partial Autocorrelation of Residuals Plot

Output 19.20.8 Inverse Autocorrelation of Residuals Plot

Output 19.20.9 Q-Q Plot of Residuals



Output 19.20.10 Histogram of Residuals

References

Aiken, R.C., ed. (1985), *Stiff Computation*, New York: Oxford University Press.

Amemiya, T. (1974), "The Nonlinear Two-Stage Least-Squares Estimator," *Journal of Econometrics*, 2, 105–110.

Amemiya, T. (1977), "The Maximum Likelihood Estimator and the Nonlinear Three-Stage Least Squares Estimator in the General Nonlinear Simultaneous Equation Model," *Econometrica*, 45 (4), 955–968.

Amemiya, T. (1985), *Advanced Econometrics*, Cambridge, MA: Harvard University Press.

Andersen, T.G., Chung, H-J., and Sorensen, B.E. (1999), "Efficient Method of Moments Estimation of a Stochastic Volatility Model: A Monte Carlo Study," *Journal of Econometrics*, 91, 61–87.

- Andersen, T.G. and Sorensen, B.E. (1996), "GMM Estimation of a Stochastic Volatility Model: A Monte Carlo Study," *Journal of Business and Economic Statistics*, 14, 328–352.
- Andrews, D.W.K. (1991), "Heteroscedasticity and Autocorrelation Consistent Covariance Matrix Estimation," *Econometrica*, 59 (3), 817–858.
- Andrews, D.W.K. and Monahan, J.C. (1992), "Improved Heteroscedasticity and Autocorrelation Consistent Covariance Matrix Estimator," *Econometrica*, 60 (4), 953–966.
- Bansal, R., Gallant, A.R., Hussey, R., and Tauchen, G.E. (1993), "Computational Aspects of Nonparametric Simulation Estimation," Belsey, D.A., ed., *Computational Techniques for Econometrics and Economic Analysis*, Boston, MA: Kluwer Academic Publishers, 3–22.
- Bansal, R., Gallant, A.R., Hussey, R., and Tauchen, G.E. (1995), "Nonparametric Estimation of Structural Models for High-Frequency Currency Market Data," *Journal of Econometrics*, 66, 251–287.
- Bard, Yonathan (1974), *Nonlinear Parameter Estimation*, New York: Academic Press.
- Bates, D.M. and Watts, D.G. (1981), "A Relative Offset Orthogonality Convergence Criterion for Nonlinear Least Squares," *Technometrics*, 23 (2), 179–183.
- Belsley, D.A., Kuh, E., and Welsch, R.E. (1980), *Regression Diagnostics*, New York: John Wiley & Sons.
- Binkley, J.K. and Nelson, G. (1984), "Impact of Alternative Degrees of Freedom Corrections in Two and Three Stage Least Squares," *Journal of Econometrics*, 24 (3) 223–233.
- Bowden, R.J. and Turkington, D.A. (1984), *Instrumental Variables*, Cambridge: Cambridge University Press.
- Bratley, P., Fox, B.L., and H. Niederreiter (1992), "Implementation and Tests of Low-Discrepancy Sequences," *ACM Transactions on Modeling and Computer Simulation*, 2 (3), 195–213.
- Breusch, T.S. and Pagan, A.R., (1979), "A Simple Test for Heteroscedasticity and Random Coefficient Variation," *Econometrica*, 47 (5), 1287–1294.
- Breusch, T.S. and Pagan, A.R. (1980), "The Lagrange Multiplier Test and Its Applications to Model Specification in Econometrics," *Review of Econometric Studies*, 47, 239–253.
- Byrne, G.D. and Hindmarsh, A.C. (1975), "A Polyalgorithm for the Numerical Solution of ODEs," *ACM TOMS*, 1 (1), 71–96.
- Calzolari, G. and Panattoni, L. (1988), "Alternative Estimators of FIML Covariance Matrix: A Monte Carlo Study," *Econometrica*, 56 (3), 701–714.
- Chan, K.C., Karolyi, G.A., Longstaff, F.A., and Sanders, A.B. (1992), "An Empirical Comparison of Alternate Models of the Short-Term Interest Rate," *The Journal of Finance*, 47 (3), 1209–1227.
- Christensen, L.R., Jorgenson, D.W., and L.J. Lau (1975), "Transcendental Logarithmic Utility Functions," *American Economic Review*, 65, 367–383.
- Dagenais, M.G. (1978), "The Computation of FIML Estimates as Iterative Generalized Least Squares Estimates in Linear and Nonlinear Simultaneous Equation Models," *Econometrica*, 46, 6, 1351–1362.

- Davidian, M and Giltinan, D.M. (1995), *Nonlinear Models for Repeated Measurement Data*, London: Chapman & Hall.
- Davidson, R. and MacKinnon, J.G. (1993), *Estimation and Inference in Econometrics*, New York: Oxford University Press.
- Duffie, D. and Singleton, K.J. (1993), "Simulated Moments Estimation of Markov Models of Asset Prices," *Econometrica* 61, 929–952.
- Fair, R.C. (1984), *Specification, Estimation, and Analysis of Macroeconometric Models*, Cambridge: Harvard University Press.
- Ferson, Wayne E. and Foerster, Stephen R. (1993), "Finite Sample Properties of the Generalized Method of Moments in Tests of Conditional Asset Pricing Models," Working Paper No. 77, University of Washington.
- Fox, B.L. (1986), "Algorithm 647: Implementation and Relative Efficiency of Quasirandom Sequence Generators," *ACM Transactions on Mathematical Software*, 12 (4), 362–276.
- Gallant, A.R. (1977), "Three-Stage Least Squares Estimation for a System of Simultaneous, Nonlinear, Implicit Equations," *Journal of Econometrics*, 5, 71–88.
- Gallant, A.R. (1987), *Nonlinear Statistical Models*, New York: John Wiley and Sons.
- Gallant, A.R. and Holly, A. (1980), "Statistical Inference in an Implicit, Nonlinear, Simultaneous Equation Model in the Context of Maximum Likelihood Estimation," *Econometrica*, 48 (3), 697–720.
- Gallant, A.R. and Jorgenson, D.W. (1979), "Statistical Inference for a System of Simultaneous, Nonlinear, Implicit Equations in the Context of Instrumental Variables Estimation," *Journal of Econometrics*, 11, 275–302.
- Gallant, A.R. and Long, J. (1997). "Estimating Stochastic Differential Equations Efficiently by Minimum Chi-squared," *Biometrika*, 84, 125–141.
- Gallant, A.R. and Tauchen, G.E. (2001), "Efficient Method of Moments," Working Paper, <http://www.econ.duke.edu/~get/wpapers/ee.pdf> accessed 12 September 2001.
- Gill, P.E., Murray, W., and Wright, M.H. (1981), *Practical Optimization*, New York: Academic Press.
- Godfrey, L.G. (1978a), "Testing Against General Autoregressive and Moving Average Error Models when the Regressors Include Lagged Dependent Variables," *Econometrica*, 46, 1293–1301.
- Godfrey, L.G. (1978b), "Testing for Higher Order Serial Correlation in Regression Equations when the Regressors Include Lagged Dependent Variables," *Econometrica*, 46, 1303–1310.
- Goldfeld, S.M. and Quandt, R.E. (1972), *Nonlinear Methods in Econometrics*, Amsterdam: North-Holland Publishing Company.
- Goldfeld, S.M. and Quandt, R.E. (1973), "A Markov Model for Switching Regressions," *Journal of Econometrics*, 3–16.
- Goldfeld, S.M. and Quandt, R.E. (1973), "The Estimation of Structural Shifts by Switching Regressions," *Annals of Economic and Social Measurement*, 2/4.

- Goldfeld, S.M. and Quandt, R.E. (1976), *Studies in Nonlinear Estimation*, Cambridge, MA: Ballinger Publishing Company.
- Goodnight, J.H. (1979), "A Tutorial on the SWEEP Operator," *The American Statistician*, 33, 149–158.
- Gourieroux, C. and Monfort, A. (1993), "Simulation Based Inference: A Survey with Special Reference to Panel Data Models," *Journal of Econometrics*, 59, 5–33.
- Greene, William H. (1993), *Econometric Analysis*, New York: Macmillan Publishing Company.
- Greene, William H. (2004), *Econometric Analysis*, New York: Macmillan Publishing Company.
- Gregory, A.W. and Veall, M.R. (1985), "On Formulating Wald Tests for Nonlinear Restrictions," *Econometrica*, 53, 1465–1468.
- Grunfeld, Y. and Griliches, "Is Aggregation Necessarily Bad ?" *Review of Economics and Statistics*, February 1960, 113–134.
- Hansen, L.P. (1982), "Large Sample Properties of Generalized Method of Moments Estimators," *Econometrica*, 50 (4), 1029–1054.
- Hansen, L.P. (1985), "A Method for Calculating Bounds on the Asymptotic Covariance Matrices of Generalized Method of Moments Estimators," *Journal of Econometrics*, 30, 203–238.
- Hatanaka, M. (1978), "On the Efficient Estimation Methods for the Macro-Economic Models Nonlinear in Variables," *Journal of Econometrics*, 8, 323–356.
- Hausman, J. A. (1978), "Specification Tests in Econometrics," *Econometrica*, 46(6), 1251–1271.
- Hausman, J.A. and Taylor, W.E. (1982), "A Generalized Specification Test," *Economics Letters*, 8, 239–245.
- Henze, N. and Zirkler, B. (1990), "A Class of Invariant Consistent Tests for Multivariate Normality," *Communications in Statistics—Theory and Methods*, 19 (10), 3595–3617.
- Johnston, J. (1984), *Econometric Methods*, Third Edition, New York: McGraw-Hill.
- Jorgenson, D.W. and Laffont, J. (1974), "Efficient Estimation of Nonlinear Simultaneous Equations with Additive Disturbances," *Annals of Social and Economic Measurement*, 3, 615–640.
- Joy, C., Boyle, P.P., and Tan, K.S. (1996), "Quasi-Monte Carlo Methods in Numerical Finance," *Management Science*, 42 (6), 926–938.
- LaMotte, L.R. (1994), "A Note on the Role of Independence in t Statistics Constructed From Linear Statistics in Regression Models," *The American Statistician*, 48 (3), 238–239.
- Lee, B. and Ingram, B. (1991), "Simulation Estimation of Time Series Models," *Journal of Econometrics*, 47, 197–205.
- MacKinnon, J.G. and White H. (1985), "Some Heteroskedasticity Consistent Covariance Matrix Estimators with Improved Finite Sample Properties," *Journal of Econometrics*, 29, 305–325.
- Maddala, G.S. (1977), *Econometrics*, New York: McGraw-Hill.

- Mardia, K. V. (1974), "Applications of Some Measures of Multivariate Skewness and Kurtosis in Testing Normality and Robustness Studies," *The Indian Journal of Statistics* 36 (B) pt. 2, 115–128.
- Mardia, K. V. (1970), "Measures of Multivariate Skewness and Kurtosis with Applications," *Biometrika* 57 (3), 519–530.
- Matis, J.H., Miller, T.H., and Allen, D.M. (1991), *Metal Ecotoxicology Concepts and Applications*, ed. M.C Newman and A. W. McIntosh, Chelsea, MI; Lewis Publishers.
- Matsumoto, M. and Nishimura, T. (1998), "Mersenne Twister: A 623-Dimensionally Equidistributed Uniform Pseudo-Random Number Generator," *ACM Transactions on Modeling and Computer Simulation*, 8, 3–30.
- McFadden, D. (1989), "A Method of Simulated Moments for Estimation of Discrete Response Models without Numerical Integration," *Econometrica*, 57, 995–1026.
- McNeil, A.J., Frey, R., and Embrechts, P. (2005), *Quantitative Risk Management: Concepts, Techniques and Tools Princeton Series in Finance*, Princeton University Press, 2005.
- Messer, K. and White, H. (1994), "A Note on Computing the Heteroskedasticity Consistent Covariance Matrix Using Instrumental Variable Techniques," *Oxford Bulletin of Economics and Statistics*, 46, 181–184.
- Mikhail, W.M. (1975), "A Comparative Monte Carlo Study of the Properties of Economic Estimators," *Journal of the American Statistical Association*, 70, 94–104.
- Miller, D.M. (1984), "Reducing Transformation Bias in Curve Fitting," *The American Statistician*, 38 (2), 124–126.
- Morelock, M.M., Pargellis, C.A., Graham, E.T., Lamarre, D., and Jung, G. (1995), "Time-Resolved Ligand Exchange Reactions: Kinetic Models for Competitive Inhibitors with Recombinant Human Renin," *Journal of Medical Chemistry*, 38, 1751–1761.
- Nelsen, Roger B. (1999), *Introduction to Copulas*, New York: Springer-Verlag.
- Newey, W.K. and West, D. W. (1987), "A Simple, Positive Semi-Definite, Heteroscedasticity and Autocorrelation Consistent Covariance Matrix," *Econometrica*, 55, 703–708.
- Noble, B. and Daniel, J.W. (1977), *Applied Linear Algebra*, Englewood Cliffs, NJ: Prentice-Hall.
- Ortega, J. M. and Rheinbolt, W.C. (1970), "Iterative Solution of Nonlinear Equations in Several Variables," Burlington, MA: Academic Press.
- Pakes, A. and Pollard, D. (1989), "Simulation and the Asymptotics of Optimization Estimators," *Econometrica* 57, 1027–1057.
- Parzen, E. (1957), "On Consistent Estimates of the Spectrum of a Stationary Time Series," *Annals of Mathematical Statistics*, 28, 329–348.
- Pearlman, J. G. (1980), "An Algorithm for Exact Likelihood of a High-Order Autoregressive-Moving Average Process," *Biometrika*, 67 (1), 232–233.

- Petzold, L.R. (1982), "Differential/Algebraic Equations Are Not ODEs," *SIAM Journal on Scientific and Statistical Computing*, 3, 367–384.
- Phillips, C.B. and Park, J.Y. (1988), "On Formulating Wald Tests of Nonlinear Restrictions," *Econometrica*, 56, 1065–1083.
- Pindyck, R.S. and Rubinfeld, D.L. (1981), *Econometric Models and Economic Forecasts*, Second Edition, New York: McGraw-Hill.
- Savin, N.E. and White, K.J. (1978), "Testing for Autocorrelation with Missing Observations," *Econometrica*, 46, 59–67.
- Sobol, I.M., *A Primer for the Monte Carlo Method*, Boca Raton, FL: CRC Press, 1994.
- Srivastava, V. and Giles, D.E.A., (1987), *Seemingly Unrelated Regression Equation Models*, New York: Marcel Dekker.
- Theil, H. (1971), *Principles of Econometrics*, New York: John Wiley & Sons.
- Thursby, J., (1982), "Misspecification, Heteroscedasticity, and the Chow and Goldfield-Quandt Test," *Review of Economics and Statistics*, 64, 314–321.
- Venzon, D.J. and Moolgavkar, S.H. (1988), "A Method for Computing Profile-Likelihood Based Confidence Intervals," *Applied Statistics*, 37, 87–94.
- White, Halbert, (1980), "A Heteroskedasticity-Consistent Covariance Matrix Estimator and a Direct Test for Heteroskedasticity," *Econometrica*, 48 (4), 817–838.
- Wu, D. M. (July 1973), "Alternative Tests of Independence Between Stochastic Regressors and Disturbances," *Econometrica*, 41 (4), 733–750.

Chapter 20

The PANEL Procedure

Contents

Overview: PANEL Procedure	1338
Getting Started: PANEL Procedure	1340
Specifying the Input Data	1340
Specifying the Regression Model	1341
Unbalanced Data	1342
Introductory Example	1342
Syntax: PANEL Procedure	1344
Functional Summary	1344
PROC PANEL Statement	1346
BY Statement	1348
CLASS Statement	1348
FLATDATA Statement	1348
ID Statement	1349
INSTRUMENT Statement	1350
LAG, ZLAG, XLAG, SLAG or CLAG Statement	1351
MODEL Statement	1352
OUTPUT Statement	1355
RESTRICT Statement	1356
TEST Statement	1356
Details: PANEL Procedure	1358
Missing Values	1358
Computational Resources	1358
Restricted Estimates	1358
Notation	1359
The One-Way Fixed-Effects Model	1359
The Two-Way Fixed-Effects Model	1361
Balanced Panels	1361
Unbalanced Panels	1364
Between Estimators	1367
Pooled Estimator	1367
The One-Way Random-Effects Model	1368
The Two-Way Random-Effects Model	1371
Parks Method (Autoregressive Model)	1376
Da Silva Method (Variance-Component Moving Average Model)	1378

Dynamic Panel Estimator	1380
Linear Hypothesis Testing	1388
Heteroscedasticity-Corrected Covariance Matrices	1389
R Square	1392
Specification Tests	1393
Troubleshooting	1394
ODS Graphics	1396
The OUTPUT OUT= Data Set	1396
The OUTEST= Data Set	1397
The OUTTRANS= Data Set	1398
Printed Output	1398
ODS Table Names	1399
Example: PANEL Procedure	1400
Example 20.1: Analyzing Demand for Liquid Assets	1400
Example 20.2: The Airline Cost Data: Fixtwo Model	1405
ODS Graphics Plots	1409
Example 20.3: The Airline Cost Data: Further Analysis	1411
Example 20.4: The Airline Cost Data: Random-Effects Models	1413
Example 20.5: Using the FLATDATA Statement	1415
Example 20.6: The Cigarette Sales Data: Dynamic Panel Estimation with GMM	1418
References	1420

Overview: PANEL Procedure

The PANEL procedure analyzes a class of linear econometric models that commonly arise when time series and cross-sectional data are combined. This type of pooled data on time series cross-sectional bases is often referred to as panel data. Typical examples of panel data include observations in time on households, countries, firms, trade, and so on. For example, in the case of survey data on household income, the panel is created by repeatedly surveying the same households in different time periods (years).

The panel data models can be grouped into several categories depending on the structure of the error term. The error structures and the corresponding methods that the PANEL procedure uses to analyze data are as follows:

- one-way and two-way models
- fixed-effects and random-effects models
- autoregressive models
- moving-average models

If the specification is dependent only on the cross section to which the observation belongs, such a model is referred to as a one-way model. A specification that depends on both the cross section and the time period to which the observation belongs is called a two-way model.

Apart from the possible one-way or two-way nature of the effect, the other dimension of difference between the possible specifications is the nature of the cross-sectional or time-series effect. The models are referred to as fixed-effects models if the effects are nonrandom and as random-effects models otherwise.

If the effects are fixed, the models are essentially regression models with dummy variables that correspond to the specified effects. For fixed-effects models, ordinary least squares (OLS) estimation is the best linear unbiased estimator. Random-effects models use a two-stage approach. In the first stage, variance components are calculated by using methods described by Fuller and Battese, Wansbeek and Kapteyn, Wallace and Hussain, or Nerlove. In the second stage, variance components are used to standardize the data, and ordinary least squares(OLS) regression is performed.

There are two types of models in the PANEL procedure that accommodate an autoregressive structure. The Parks method is used to estimate a first-order autoregressive model with contemporaneous correlation. The dynamic panel estimator is used to estimate an autoregressive model with lagged dependent variable.

The Da Silva method is used to estimate mixed variance-component moving-average error process. The regression parameters are estimated by using a two-step generalized least squares(GLS)-type estimator.

The new PANEL procedure enhances the features that were implemented in the TSCSREG procedure. The following list shows the most important additions.

- New estimation methods include between estimators, pooled estimators, and dynamic panel estimators that use the generalized method of moments (GMM). The variance components for random-effects models can be calculated for both balanced and unbalanced panels by using the methods described by Fuller and Battese, Wansbeek and Kapteyn, Wallace and Hussain, or Nerlove.
- The CLASS statement creates classification variables that are used in the analysis.
- The TEST statement includes new options for Wald, Lagrange multiplier, and the likelihood ratio tests.
- The new RESTRICT statement specifies linear restrictions on the parameters.
- The FLATDATA statement enables the data to be in a compressed form.
- Several methods that produce heteroscedasticity-consistent covariance matrices (HCCME) are added because the presence of heteroscedasticity can result in inefficient and biased estimates of the variance covariance matrix in the OLS framework.
- The LAG statement can generate a large number of missing values, depending on lag order. Typically, it is difficult to create lagged variables in the panel setting. If lagged variables are created in a DATA step, several programming steps that include loops are often needed. By including the LAG statement, the PANEL procedure makes the creation of lagged values easy. The missing values can be replaced with zeros, overall mean, time mean, or cross section mean by using the LAG, ZLAG, XLAG, SLAG, and CLAG statements.
- The OUTPUT statement enables you to output data and estimates that can be used in other analyses.

Getting Started: PANEL Procedure

This section demonstrates the use of the PANEL procedure.

Specifying the Input Data

The PANEL procedure is similar to other regression procedures in SAS. Suppose you want to regress the variable *Y* on regressors *X1* and *X2*. Cross sections are identified by the variable *STATE*, and time periods are identified by the variable *DATE*. The input data set used by PROC PANEL must be sorted by cross section and by time within each cross section. Therefore, the first step in PROC PANEL is to make sure that the input data set is sorted. The following statements sort the data set *A* appropriately:

```
proc sort data=a;
    by state date;
run;
```

The next step is to invoke the PANEL procedure and specify the cross section and time series variables in an ID statement. The following statements shows the correct syntax:

```
proc panel data=a;
    id state date;
    model y = x1 x2;
run;
```

Alternatively, PROC PANEL has the capability to read “flat” data. Say that you are using the data set *A*, which has observations on states. Specifically, the data are composed of observations on *Y*, *X1*, and *X2*. Unlike the previous case, the data is not recorded with a PROC PANEL structure. Instead, you have all of a state’s information on a single row. You have variables to denote the name of the state (say *state*). The time observations for the *Y* variable are recorded horizontally. So the variable *Y_1* is the first period’s time observation, *Y_10* is the tenth period’s observation for some state. The same holds for the other variables. You have variables *X1_1* to *X1_10*, *X2_1* to *X2_10*, and *X3_1* to *X3_10* for others. With such data, PROC PANEL could be called by using the following syntax:

```
proc panel data=a;
    flatdata indid = state base = (Y X1 X2) tsname = t;
    id state t;
    model Y = X1 X2;
run;
```

See “[FLATDATA Statement](#)” on page 1348 and [Example 20.2](#) for more information about the use of the FLATDATA statement.

Specifying the Regression Model

The MODEL statement in PROC PANEL is specified like the MODEL statement in other SAS regression procedures: the dependent variable is listed first, followed by an equal sign, followed by the list of regressor variables, as shown in the following statements:

```
proc panel data=a;
    id state date;
    model y = x1 x2;
run;
```

The major advantage of using PROC PANEL is that you can incorporate a model for the structure of the random errors. It is important to consider what kind of error structure model is appropriate for your data and to specify the corresponding option in the MODEL statement.

The error structure options supported by the PANEL procedure are FIXONE, FIXONETIME, FIXTWO, RANONE, RANTWO, PARKS, DASILVA, GMM and ITGMM(iterated GMM). See the section “[Details: PANEL Procedure](#)” on page 1358 for more information about these methods and the error structures they assume. The following statements fit a Fuller-Battese one-way random-effects model.

```
proc panel data=a;
    id state date;
    model y = x1 x2 / ranone vcomp=fb;
run;
```

You can specify more than one error structure option in the MODEL statement; the analysis is repeated using each specified method. You can use any number of MODEL statements to estimate different regression models or estimate the same model by using different options. See [Example 20.1](#) for more information.

In order to aid in model specification within this class of models, the procedure provides two specification test statistics. The first is an F statistic that tests the null hypothesis that the fixed-effects parameters are all zero. The second is a Hausman m statistic that provides information about the appropriateness of the random-effects specification. The m statistic is based on the idea that, under the null hypothesis of no correlation between the effects variables and the regressors, OLS and GLS are consistent, but OLS is inefficient. Hence, a test can be based on the result that the covariance of an efficient estimator with its difference from an inefficient estimator is zero. Rejection of the null hypothesis might suggest that the fixed-effects model is more appropriate.

The procedure also provides the Buse R square measure. This number is interpreted as a measure of the proportion of the transformed sum of squares of the dependent variable that is attributable to the influence of the independent variables. In the case of OLS estimation, the Buse R square measure is equivalent to the usual R square measure.

Unbalanced Data

In the case of fixed-effects models, random-effects models, between estimators, and dynamic panel estimators, the PANEL procedure can process data with different numbers of time series observations across different cross sections. The Parks and Da Silva methods cannot be used with unbalanced data. The missing time series observations are recognized by the absence of time series ID variable values in some of the cross sections in the input data set. Moreover, if an observation with a particular time series ID value and cross-sectional ID value is present in the input data set, but one or more of the model variables are missing, that time series point is treated as missing for that cross section.

Introductory Example

The following statements use the cost function data from Greene (1990) to estimate the variance components model. The variable PRODUCTION is the log of output in millions of kilowatt-hours, and COST is the log of cost in millions of dollars. Refer to Greene (1990) for details.

```
data greene;
  input firm year production cost @@;
datalines;
  1 1955    5.36598    1.14867    1 1960    6.03787    1.45185
  1 1965    6.37673    1.52257    1 1970    6.93245    1.76627
  2 1955    6.54535    1.35041    2 1960    6.69827    1.71109
  2 1965    7.40245    2.09519    2 1970    7.82644    2.39480
... more lines ...
```

You decide to fit the following model to the data:

$$C_{it} = \text{Intercept} + \beta P_{it} + v_i + e_t + \epsilon_{it} \quad i = 1, \dots, N; \quad t = 1, \dots, T$$

where C_{it} and P_{it} represent the cost and production, and v_i , e_t and ϵ_{it} are the cross-sectional, time series, and error variance components.

If you assume that the time and cross-sectional effects are random, you are left with four possible estimators for the variance components. You choose Fuller-Battese.

The following statements fit this model.

```
proc sort data=greene;
  by firm year;
run;

proc panel data=greene;
  model cost = production / rantwo vcomp = fb;
  id firm year;
run;
```


The PANEL procedure output is shown in Figure 20.1. A model description is printed first, which reports the estimation method used and the number of cross sections and time periods. The variance components estimates are printed next. Finally, the table of regression parameter estimates shows the estimates, standard errors, and t tests.

Figure 20.1 The Variance Components Estimates

The PANEL Procedure					
Fuller and Battese Variance Components (RanTwo)					
Dependent Variable: cost					
Model Description					
Estimation Method			RanTwo		
Number of Cross Sections			6		
Time Series Length			4		
Fit Statistics					
SSE	0.3481	DFE	22		
MSE	0.0158	Root MSE	0.1258		
R-Square	0.8136				
Variance Component Estimates					
Variance Component for Cross Sections			0.046907		
Variance Component for Time Series			0.00906		
Variance Component for Error			0.008749		
Hausman Test for Random Effects					
DF	m Value	Pr > m			
1	26.46	<.0001			
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Pr > t
Intercept	1	-2.99992	0.6478	-4.63	0.0001
production	1	0.746596	0.0762	9.80	<.0001

Syntax: PANEL Procedure

The following statements are used with the PANEL procedure.

```

PROC PANEL options ;
  BY variables ;
  CLASS options ;
  FLATDATA options ;
  ID cross-section-id time-series-id ;
  INSTRUMENTS options ;
  LAG options ;
  MODEL dependent = regressors < / options > ;
  RESTRICT equation1 < , equation2 . . . > ;
  TEST equation1 < , equation2 . . . > ;

```

Functional Summary

The statements and options used with the PANEL procedure are summarized in the following table.

Description	Statement	Option
Data Set Options		
Includes correlations in the OUTEST= data set	PANEL	CORROUT
Includes covariances in the OUTEST= data set	PANEL	COVOUT
Specifies the input data set	PANEL	DATA=
Specifies variables to keep but not transform	FLATDATA	KEEP=
Specifies the output data set for CLASS STATEMENT	CLASS	OUT =
Specifies the output data set	FLATDATA	OUT =
Specifies the name of an output SAS data set	OUTPUT	OUT=
Writes parameter estimates to an output data set	PANEL	OUTEST=
Writes the transformed series to an output data set	PANEL	OUTTRANS=
Requests that the procedure produce graphics via the Output Delivery System	PANEL	PLOTS=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies the classification variables	CLASS	
Transfers the data into uncompressed form	FLATDATA	
Specifies the cross section and time ID variables	ID	

Description	Statement	Option
Declares instrumental variables	INSTRUMENTS	
Lag Generation		
Specifies output data set for lags where missing values are replaced with the cross section mean	CLAG	OUT=
Specifies output data set for lags with missing values included	LAG	OUT=
Specifies output data set for lags where missing values are replaced with the time period mean	SLAG	OUT=
Specifies output data set for lags where missing values are replaced with overall mean	XLAG	OUT=
Specifies output data set for lags where missing values are replaced with zero	ZLAG	OUT=
Printing Control Options		
Prints correlations of the estimates	MODEL	CORRB
Prints covariances of the estimates	MODEL	COVB
Suppresses printed output	MODEL	NOPRINT
Requests that the procedure produce graphics via the Output Delivery System	MODEL	PLOTS=
Performs tests of linear hypotheses	TEST	
Model Estimation Options		
Requests the Breusch-Pagan test for one-way random effects	MODEL	BP
Requests the Breusch-Pagan test for two-way random effects	MODEL	BP2
Specifies the between-groups model	MODEL	BTWNG
Specifies the between-time-periods model	MODEL	BTWNT
Requests the clustered HCCME estimator for the variance-covariance matrix	MODEL	CLUSTER
Specifies the Da Silva method	MODEL	DASILVA
Specifies the one-way fixed-effects model	MODEL	FIXONE
Specifies the one-way fixed-effects model with respect to time	MODEL	FIXONETIME
Specifies the two-way fixed-effects model	MODEL	FIXTWO
Specifies the Moore-Penrose generalized inverse	MODEL	GINV = G4
Specifies the dynamic panel estimator model	MODEL	GMM
Requests the HCCME estimator for the variance-covariance matrix	MODEL	HCCME=
Specifies the order of the moving average error process for Da Silva method	MODEL	M=
Suppresses the intercept term	MODEL	NOINT
Specifies the Parks method	MODEL	PARKS

Description	Statement	Option
Prints the Φ matrix for Parks method	MODEL	PHI
Specifies the pooled model	MODEL	POOLED
Specifies the one-way random-effects model	MODEL	RANONE
Specifies the two-way random-effects model	MODEL	RANTWO
Prints autocorrelation coefficients for Parks method	MODEL	RHO
Controls the check for singularity	MODEL	SINGULAR=
Specifies the method for the variance components estimator	MODEL	VCOMP=
Specifies linear equality restrictions on the parameters	RESTRICT	
Specifies the TEST statement	TEST	WALD, LM, LR

PROC PANEL Statement

PROC PANEL *options* ;

The following options can be specified on the PROC PANEL statement.

DATA=SAS-data-set

names the input data set. The input data set must be sorted by cross section and by time period within cross section. If you omit the DATA= option, the most recently created SAS data set is used.

OUTEST=SAS-data-set

names an output data set to contain the parameter estimates. When the OUTEST= option is not specified, the OUTEST= data set is not created. See the section “[The OUTEST= Data Set](#)” on page 1397 for details about the structure of the OUTEST= data set.

OUTTRANS=SAS-data-set

names an output data set to contain the transformed series for further analysis and computation of models with time observations greater than two. See the section “[The OUTTRANS= Data Set](#)” on page 1398 for details about the structure of the OUTTRANS= data set.

OUTCOV

COVOUT

writes the standard errors and covariance matrix of the parameter estimates to the OUTEST= data set. See the section “[The OUTEST= Data Set](#)” on page 1397 for details.

OUTCORR

CORROUT

writes the correlation matrix of the parameter estimates to the OUTEST= data set. See the section “[The OUTEST= Data Set](#)” on page 1397 for details.

PLOTS < (*global-plot-options* < (**NCROSS**=*value*) >) > < = (*specific-plot-options*) >

selects plots to be produced via the Output Delivery System. For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*). The *global-plot-options* apply to all relevant plots generated by the PANEL procedure.

Global Plot Options

The following *global-plot-options* are supported:

ONLY	suppresses the default plots. Only the plots specifically requested are produced.
UNPACKPANEL UNPACK	breaks a graphic that is otherwise paneled into individual component plots.
NCROSS= <i>value</i>	specifies the number of cross sections to be combined into one time series plot.

Specific Plot Options

The following *specific-plot-options* are supported:

ACTSURFACE	produces a surface plot of actual values.
ALL	produces all appropriate plots.
FITPLOT	plots the predicted and actual values.
NONE	suppresses all plots.
PREDSURFACE	produces a surface plot of predicted values.
QQ	produces a QQ plot of residuals.
RESIDSTACK RESSTACK	produces a stacked plot of residuals.
RESIDSURFACE	produces a surface plot of residual values.
RESIDUAL RES	plots the residuals.
RESIDUALHISTOGRAM RESIDHISTOGRAM	plots the histogram of residuals.

For more details, see the section “[ODS Graphics](#)” on page 1396.

In addition, any of the following MODEL statement options can be specified in the PROC PANEL statement: CORRB, COVB, FIXONE, FIXONETIME, FIXTWO, BTWNG, BTWNT, POOLED, RANONE, RANTWO, FULLER, PARKS, DASILVA, NOINT, NOPRINT, M=, PHI, RHO, VCOMP=, and SINGULAR=. When specified in the PROC PANEL statement, these options are equivalent to specifying the options for every MODEL statement. See the section “[MODEL Statement](#)” on page 1352 for a complete description of each of these options.

BY Statement

BY *variables* ;

A BY statement can be used with PROC PANEL to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the input data set must be sorted by the BY variables as well as by cross section and time period within the BY groups.

The following statements show an example:

```
proc sort data=a;
    by byvar1 byvar2 csid tsid;
run;

proc panel data=a;
    by byvar1 byvar2;
    id csid tsid;
    ...
run;
```

CLASS Statement

CLASS *variables* </ out= SAS-data-set> ;

The CLASS statement names the classification variables to be used in the analysis. Classification variables can be either character or numeric.

In PROC PANEL, the CLASS statement enables you to output class variables to a data set that contains a copy of the original data.

FLATDATA Statement

FLATDATA *options* </ out= SAS-data-set> ;

The following options must be specified in the FLATDATA statement:

BASE=(*variable, variable, ..., variable*)

specifies the variables that are to be transformed into a proper PROC PANEL format. All variables to be transformed must be named according to the convention: *basename_timeperiod*. You supply just the *basename*, and the procedure extracts the appropriate variables to transform. If some year's data are missing for a variable, then PROC PANEL detects this and fills in with missing values.

INDID=*variable*

names the variable in the input data set that uniquely identifies each individual. The INDID variable can be a character or numeric variable.

KEEP=(*variable, variable, . . . , variable*)

specifies the variables that are to be copied without any transformation. These variables remain constant with respect to time when the data are converted to PROC PANEL format. This is an optional item.

TSNAME=*name*

specifies a name for the generated time identifier. The name must satisfy the requirements for the name of a SAS variable. The name can be quoted, but it must not be the name of a variable in the input data set.

The following options can be specified on the FLATDATA statement after the slash (/):

OUT =*SAS-data-set*

saves the converted flat data set to a PROC PANEL formatted data set.

ID Statement

ID *cross-section-id time-series-id* ;

The ID statement is used to specify variables in the input data set that identify the cross section and time period for each observation.

When an ID statement is used, the PANEL procedure verifies that the input data set is sorted by the cross section ID variable and by the time series ID variable within each cross section. The PANEL procedure also verifies that the time series ID values are the same for all cross sections.

To make sure the input data set is correctly sorted, use PROC SORT to sort the input data set with a BY statement with the variables listed exactly as they are listed in the ID statement, as shown in the following statements:

```
proc sort data=a;
    by csid tsid;
run;

proc panel data=a;
    id csid tsid;
    ... etc. ...
run;
```

INSTRUMENT Statement

INSTRUMENTS *options* ;

The INSTRUMENTS statement denotes which variables are used in the moment condition equations of the dynamic panel estimator. The following options can be used with the INSTRUMENTS statement.

CONSTANT

includes an intercept (column of ones) as an uncorrelated exogenous instrument.

DEPVAR

specifies that a dependent variable be used at an appropriate lag as an instrument.

CORRELATED=(*variable, variable, ..., variable*)

specifies a list of variables correlated with the error term. These variables are not used in forming moment conditions from level equations.

EXOGENOUS=(*variable, variable, ..., variable*)

specifies a list of variables that are not correlated with the error term.

PREDETERMINED=(*variable, variable, ..., variable*)

specifies a list of variables whose future realizations can be correlated with the error term but whose present and past realizations are not.

If a variable listed in the EXOGENOUS list is not included in the CORRELATED list, then it is considered to be uncorrelated to the error term. For example, in the following statements, the exogenous instruments are Z1, Z2 and X1. Z1 is an instrument that is correlated to the individual fixed effects.

```
proc panel data=a;
  inst exogenous=(Z1 Z2 X1)
    correlated = (Z1) constant depvar;
  model Y = X1 X2 X3 / gmm;
run;
```

For a detailed discussion of the model set up and the use of the INSTRUMENTS statement, see “[Dynamic Panel Estimator](#)” on page 1380.

Note that for each MODEL statement, one INSTRUMENT statement is required. In other words, if there are two models to be estimated by using GMM within one PANEL procedure, then there should be two INSTRUMENT statements. For example,

```
proc panel data=test;
  inst depvar pred=(x1 x2) exog=(x3 x4 x5) correlated=(x3 x4 x5);
  model y = y_1 x1 x2 / gmm maxband=6 nolevels ginv=g4 artest=5;
  inst pred=(x2 x4) exog=(x3 x5) correlated=(x3 x4);
  model y = y_1 x2 / gmm maxband=6 nolevels ginv=g4 artest=5;
  id cs ts;
run;
```


LAG, ZLAG, XLAG, SLAG or CLAG Statement

LAG *var*₁(*lag*₁ *lag*₂ ... *lag*_T), ..., *var*_N(*lag*₁ *lag*₂ ... *lag*_T) < /OUT= SAS-data-set > ;

Generally, creating lags of variables in a panel setting is a tedious process in which you must generate many DATA STEP statements. The PANEL procedure now enables you to generate lags of any series without jumping across any individual's boundary. The lag statement is a data set generation tool. Using the data created by a LAG statement requires a subsequent PROC PANEL call. There can be more than one LAG statement in each call to PROC PANEL.

The LAG statement tends to generate many missing values in the data. This can be problematic, because the number of usable observations diminishes with the lag length. Therefore, PROC PANEL offers alternatives to the LAG statement. The OUT= option must be specified on the LAG statement. The output data set includes all variables in the input set, plus the lags that are denoted with the convention originalvar_lag. The following statements can be used instead of LAG with otherwise identical syntax:

CLAG

replaces missing values with the cross section mean for that variable in that cross section. Note that missing values are replaced only if they are in the generated (lagged) series. Missing variables in the original variables are not changed.

SLAG

replaces missing values with the time mean for that variable in that time period. Note that missing values are replaced only if they are in the generated (lagged) series. Missing variables in the original variables are not changed.

XLAG

replaces missing values with the overall mean for that variable. Note that missing values are replaced only if they are in the generated (lagged) series. Missing variables in the original variables are not changed.

ZLAG

replaces missing values with zero for that variable. Note that missing values are replaced only if they are in the generated (lagged) series. Missing variables in the original variables are not changed.

Assume that data set A has been sorted by cross section and time period within cross section (or FLATDATA has been specified), and the variables are Y, X1, X2 and X3. You desire the lags 1 and 3 of the X1 variable; lag 3, 6, and 9 of X2; and lag 2 of variable X3. The following PROC PANEL statements generate a series with those characteristics.

```
proc panel data=A;
  id i t;
  lag X1(1 3) X2(3 6 9) X3(2) / out=A_lag;
run;
```

If you want a zeroing instead of missing values, then you specify the following:

```
proc panel data=A;
```

```

id i t;
zlag x1(1 3) x2(3 6 9) x3(2) / out=A_zlag;
run;

```

Similarly, you can specify XLAG to replace with overall means, SLAG to replace with time means, and CLAG to replace with cross section means.

MODEL Statement

MODEL *response = regressors* </ options > ;

The MODEL statement specifies the regression model and the error structure assumed for the regression residuals. The response variable on the left side of the equal sign is regressed on the independent variables listed after the equal sign. Any number of MODEL statements can be used. For each model statement, only one response variable can be specified on the left side of the equal sign.

The error structure is specified by the FULLER, PARKS, DASILVA, FIXONE, FIXONETIME, FIXTWO, RANONE, RANTWO, GMM, and ITGMM options. More than one of these options can be used, in which case the analysis is repeated for each error structure model specified.

Models can be given labels. Model labels are used in the printed output to identify the results for different models. If no label is specified, the response variable name is used as the label for the model. The model label is specified as follows:

label : MODEL ...;

The following options can be specified in the MODEL statement after a slash (/).

ARTEST=integer

specifies the maximum order of the test for the presence of AR effects in the residual in the dynamic panel model. The acceptable range of values for this option is 1 to $t - 3$.

ATOL=number

specifies the convergence criterion for iterated GMM when convergence of the method is determined by convergence in the weighting matrix. The convergence criterion must be positive. The default option is the BTOL= option unless the ATOL= option is specified. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

BANDOPT=TRAILING | CENTERED | LEADING

specifies which observations are included in the instrument list when the MAXBAND= option is specified. This option should be used only for exogenous instruments. BANDOPT=TRAILING is the default. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

BP

requests the Breusch-Pagan one-way test for random effects.

BP2

requests the Breusch-Pagan two-way test for random effects.

BTOL=number

specifies the convergence criterion for iterated GMM when convergence of the method is determined by convergence in the parameter matrix. The convergence criterion must be positive. The default is BTOL=1E-8. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

BTWNG

specifies that a between-groups model be estimated.

BTWNT

specifies that a between-time-periods model be estimated.

CLUSTER

specifies the cluster correction for the variance-covariance matrix. The cluster correction can be requested with HCCME=0, 1, 2 or 3.

CORRB**CORR**

prints the matrix of estimated correlations between the parameter estimates.

COVB**VAR**

prints the matrix of estimated covariances between the parameter estimates.

DASILVA

specifies that the model be estimated by using the Da Silva method, which assumes a mixed variance-component moving average model for the error structure. See the section “[Da Silva Method \(Variance-Component Moving Average Model\)](#)” on page 1378 for details.

FIXONE

specifies that a one-way fixed-effects model be estimated with the one-way model corresponding to cross-sectional effects only.

FIXONETIME

specifies that a one-way fixed-effects model be estimated with the one-way model corresponding to time effects only.

FIXTWO

specifies that a two-way fixed-effects model be estimated.

GINV= G2 | G4

specifies what type of generalized inverse to use. The default is a G2 inverse. The G4 inverse is generally more desirable except that it is a more numerically intensive methodology.

GMM

specifies that the model be estimated by using the dynamic panel estimator method, which allows for autoregressive processes. This is the single-step model. Note that with this option one INSTRUMENT statement is required for each MODEL statement. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

HCCME=number

specifies the type of HCCME variance-covariance matrix requested. The expected range of values is NO or 0 to 4. The default is NO, no correction. See the section “[Heteroscedasticity-Corrected Covariance Matrices](#)” on page 1389 for details.

ITGMM

specifies that the model be estimated by using the dynamic panel estimator method, but that PROC PANEL keep updating the weighting matrix until either the parameter vector converges or the weighting matrix converges. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

ITPRINT

prints out the iteration history of the parameter and transformed sum of error squared.

M=number

specifies the order of the moving-average process in the Da Silva method. The value of the M=option must be less than $T - 1$. The default is M=1.

MAXBAND=integer

specifies the maximum number of time periods (per instrumental variable) that are allowed into the moment condition. The acceptable range of values for this option is 1 to $T - 1$. If BANDOPT=LEADING or CENTERED, then the default value of MAXBAND is 2. If BANDOPT=TRAILING, then the default value of MAXBAND is 1. If no BANDOPT option is specified such as when no exogenous instruments are used, then the default value of MAXBAND is 1. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

MAXITER=integer

specifies the maximum number of iterations allowed for the iterated GMM option. The default value is MAXITER=200. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

NODIFFS

specifies that the dynamic panel model be estimated without moment conditions from the difference equations. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

NOESTIM

limits the estimation of a FIXONE, FIXONETIME, RANONE model to the generation of the transformed series. This option is intended for use with an OUTTRANS= data set.

NOINT

suppresses the intercept parameter from the model.

NOLEVELS

specifies that the dynamic panel model be estimated without moment conditions from the level equations. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

NOPRINT

suppresses the normal printed output.

PARKS

specifies that the model be estimated by using the Parks method, which assumes a first-order autoregressive model for the error structure. See the section “[Parks Method \(Autoregressive Model\)](#)” on page 1376 for details.

PHI

prints the Φ matrix of estimated covariances of the observations for the Parks method. The PHI option is relevant only when the PARKS option is used. See the section “[Parks Method \(Autoregressive Model\)](#)” on page 1376 for details.

POOLED

specifies that a pooled (OLS) model be estimated.

RANONE

specifies that a one-way random-effects model be estimated.

RANTWO

specifies that a two-way random-effects model be estimated.

RHO

prints the estimated autocorrelation coefficients for the Parks method.

ROBUST

specifies that the robust weighting matrix be used in the calculation of the variance-covariance matrix of the single-step dynamic panel estimator. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

SINGULAR=number

specifies a singularity criterion for the inversion of the matrix. The default depends on the precision of the computer system.

TIME

specifies that the model be estimated by using the dynamic panel estimator method, but that PROC PANEL includes time dummy variables to model any time effects present in the data. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

TWOSTEP

specifies that the model be estimated by using the dynamic panel estimator method, but that two steps be used in the estimation. An initial first step is used to form an estimator for the weighting matrix used in the second step. See the section “[Dynamic Panel Estimator](#)” on page 1380 for details.

VCOMP=FB | NL | WH | WK

specifies the type of variance component estimate to use. The default is VCOMP=FB for balanced data and VCOMP=WK for unbalanced data. See the section “[The One-Way Random-Effects Model](#)” on page 1368 and “[The Two-Way Random-Effects Model](#)” on page 1371 for details.

OUTPUT Statement

OUTPUT *OUT=SAS-data-set* < = options ... > ;

The OUTPUT statement creates an output SAS data set as specified by the following options:

OUT=SAS-data-set

names the output SAS data set to contain the predicted and transformed values. If the OUT= option is not specified, the new data set is named according to the DATA*n* convention.

PREDICTED=name**P=name**

writes the predicted values to the output data set.

RESIDUAL=name**R=name**

writes the residuals from the predicted values based on both the structural and time series parts of the model to the output data set.

RESTRICT Statement

RESTRICT < "string"> equation < ,equation2... > ;

The RESTRICT statement specifies linear equality restrictions on the parameters in the previous model statement. There can be as many unique restrictions as the number of parameters in the preceding model statement. Multiple RESTRICT statements are understood as joint restrictions on a model's parameters. Restrictions on the intercept are obtained by the use of the keyword INTERCEPT.

Currently, only linear equality restrictions are permitted in PROC PANEL. Tests and restriction expressions can only be composed of algebraic operations that involve the addition symbol (+), subtraction symbol (−), and multiplication symbol (*).

The RESTRICT statement accepts labels that are produced in the printed output. RESTRICT statement can be labeled in two ways. A RESTRICT statement can be preceded by a label followed by a colon. This is illustrated in **rest1** in the example below. Alternatively, the keyword RESTRICT can be followed by a quoted string.

The following statements illustrate the use of the RESTRICT statement:

```
proc panel;
  model y = x1 x2 x3;
  restrict x1 = 0, x2 * .5 + 2 * x3 = 0;
  rest1: restrict x2 = 0, x3 = 0;
  restrict "rest2" intercept=1;
run;
```

Note that a restrict statement cannot include a division sign in its formulation.

TEST Statement

TEST < "string"> equation < ,equation2... > < / options > ;

The TEST statement performs Wald, Lagrange multiplier and likelihood ratio tests of linear hypotheses about the regression parameters in the preceding MODEL statement. Each equation specifies a linear hypothesis to be tested. All hypotheses in one TEST statement are tested jointly. Variable names in the equations must correspond to regressors in the preceding MODEL statement, and each name represents the coefficient of the corresponding regressor. The keyword INTERCEPT refers to the coefficient of the intercept.

The following options can be specified on the TEST statement after the slash (/):

ALL

specifies Wald, Lagrange multiplier and likelihood ratio tests.

WALD

specifies the WALD test.

LM

specifies the Lagrange multiplier test.

LR

specifies the likelihood ratio test.

The Wald test is performed by default.

The following statements illustrate the use of the TEST statement:

```
proc panel;
  id csid tsid;
  model y = x1 x2 x3;
  test x1 = 0, x2 * .5 + 2 * x3 = 0;
  test_int: test intercept = 0, x3 = 0;
run;
```

The first test investigates the joint hypothesis that

$$\beta_1 = 0$$

and

$$.5\beta_2 + 2\beta_3 = 0$$

Currently, only linear equality restrictions and tests are permitted in PROC PANEL. Tests and restriction expressions can be composed only of algebraic operations that involve the addition symbol (+), subtraction symbol (−), and multiplication symbol (*).

The TEST statement accepts labels that are produced in the printed output. The TEST statement can be labeled in two ways. A TEST statement can be preceded by a label followed by a colon. Alternatively, the keyword TEST can be followed by a quoted string. If both are presented, PROC PANEL uses the quoted string. In the event no label is present, PROC PANEL automatically labels the tests. If both a TEST and a RESTRICT statement are specified, the test is run with restrictions applied.

Note that for the DaSilva method, only the WALD test is available.

Details: PANEL Procedure

Missing Values

Any observation in the input data set with a missing value for one or more of the regressors is ignored by PROC PANEL and is not used in the model fit.

If there are observations in the input data set with missing dependent variable values but with nonmissing regressors, PROC PANEL can compute predicted values and store them in an output data set by using the OUTPUT statement. Note that the presence of such observations with missing dependent variable values does not affect the model fit because these observations are excluded from the calculation.

If either some regressors or the dependent variable values are missing, the model is estimated as unbalanced where the number of time series observations across different cross sections does not have to be equal. The Parks and Da Silva methods cannot be used with unbalanced data.

Computational Resources

The more parameters there are to be estimated, the more memory and time are required to estimate the model. Also affecting these resources are the estimation method chosen and the method to calculate variance components. If the model has p parameters including the intercept, there are at least $p + [p * (p + 1)]/2$ numbers being held in the memory.

If the Arellano and Bond GMM approach is used, the amount of memory grows proportionately to the number of instruments in the INSTRUMENT statement. If the ITGMM (iterated GMM) option is selected, the computation time also depends on the convergence criteria selected and the maximum number of iterations allowed.

Restricted Estimates

A consequence of estimating a linear model with a restriction is that the error degrees of freedom increase by the number of restrictions. PROC PANEL produces the Lagrange multiplier associated with each restriction.

Say that you are interested in linear regression in which there are r restrictions. A linear restriction implies the following set of equations that relate the regression coefficients:

$$\begin{aligned}
 R_{1,1}\beta_1 + R_{1,2}\beta_2 + \cdots + R_{1,p}\beta_p &= q_1 \\
 R_{2,1}\beta_1 + R_{2,2}\beta_2 + \cdots + R_{2,p}\beta_p &= q_2 \\
 &\dots\dots\dots \\
 R_{r,1}\beta_1 + R_{r,2}\beta_2 + \cdots + R_{r,p}\beta_p &= q_r
 \end{aligned}$$

To economize on notation, you can represent the restriction structure in the following matrix notation $\mathbf{R}\boldsymbol{\beta} = \mathbf{q}$. The restricted $\boldsymbol{\beta}$ estimator is given by:

$$\boldsymbol{\beta}^* = \boldsymbol{\beta} - (\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}' \left[\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}' \right]^{-1} (\mathbf{R}\boldsymbol{\beta} - \mathbf{q})$$

The Lagrange multipliers are given as:

$$\boldsymbol{\lambda}_* = \left[\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}' \right]^{-1} (\mathbf{R}\boldsymbol{\beta} - \mathbf{q})$$

The standard errors of the Lagrange Multipliers are calculated from the following relationship:

$$\text{Var}(\boldsymbol{\lambda}_*) = \left[\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}' \right]^{-1} \mathbf{R} \text{Var}(\boldsymbol{\beta}) \mathbf{R}' \left[\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}' \right]^{-1}$$

A significant Lagrange multiplier implies that you can reject the null hypothesis that the restrictions are not binding.

Note that in the special case of the fixed-effects models, the NOINT option and RESTRICT INTERCEPT=0 option give different estimates. This is not an error; it reflects two perspectives on the same issue. In the FIXONE case, the intercept is the last cross section's fixed effect (or the last time affecting the case of FIXONETIME). Specifying the NOINT option removes the intercept, but allows the last effect in. The NOINT command simply reclassifies the effects. The dummy variables become true cross section effects. If you specify the NOINT option with the FIXTWO option, the restriction is imposed that the last time effect is zero. A RESTRICT INTERCEPT=0 statement suppresses the estimation of the last effect in the FIXONE and FIXONETIME case. A RESTRICT INTERCEPT=0 has similar effects on the FIXTWO estimator. In general, restricting the intercept to zero is not recommended because OLS loses its unbiased nature.

Notation

The following notation represents the usual panel structure, with the specification of u_{it} dependent on the particular model:

$$y_{it} = \sum_{k=1}^K x_{itk} \beta_k + u_{it} \quad i = 1, \dots, N; t = 1, \dots, T_i$$

The total number of observations $M = \sum_{i=1}^N T_i$. For the balanced data case, $T_i = T$ for all i . The $M \times M$ covariance matrix of u_{it} is denoted by \mathbf{V} . Let \mathbf{X} and \mathbf{y} be the independent and dependent variables arranged by cross section and by time within each cross section. Let \mathbf{X}_s be the X matrix without the intercept. All other notation is specific to each section.

The One-Way Fixed-Effects Model

The specification for the one-way fixed-effects model is

$$u_{it} = \gamma_i + \epsilon_{it}$$

where the γ_i s are nonrandom parameters to be estimated.

Let $\mathbf{Q}_0 = \text{diag}(\mathbf{E}_{T_i})$, with $\bar{\mathbf{J}}_{T_i} = \mathbf{J}_{T_i}/T_i$ and $\mathbf{E}_{T_i} = \mathbf{I}_{T_i} - \bar{\mathbf{J}}_{T_i}$, where \mathbf{J}_{T_i} is a matrix of T_i ones.

The matrix \mathbf{Q}_0 represents the within transformation. In the one-way model, the within transformation is the conversion of the raw data to deviations from a cross section's mean. The vector $\tilde{\mathbf{x}}_{it}$ is a row of the general matrix \mathbf{X}_s , where the subscripted s implies the constant (column of ones) is missing.

Let $\tilde{\mathbf{X}}_s = \mathbf{Q}_0\mathbf{X}_s$ and $\tilde{\mathbf{y}} = \mathbf{Q}_0\mathbf{y}$. The estimator of the slope coefficients is given by

$$\tilde{\beta}_s = (\tilde{\mathbf{X}}_s'\tilde{\mathbf{X}}_s)^{-1}\tilde{\mathbf{X}}_s'\tilde{\mathbf{y}}$$

Once the slope estimates are in hand, the estimation of an intercept or the cross-sectional fixed effects is handled as follows. First, you obtain the cross-sectional effects:

$$\gamma_i = \bar{y}_i - \tilde{\beta}_s\bar{x}_i \quad \text{for } i = 1 \dots N$$

If the NOINT option is specified, then the dummy variables' coefficients are set equal to the fixed effects. If an intercept is desired, then the i th dummy variable is obtained from the following expression:

$$D_i = \gamma_i - \gamma_N \quad \text{for } i = 1 \dots N - 1$$

The intercept is the N th fixed effect γ_N .

The within model sum of squared errors is:

$$\text{SSE} = \sum_{i=1}^N \sum_{t=1}^{T_i} (y_{it} - \gamma_i - \mathbf{X}_s\tilde{\beta}_s)^2$$

The estimated error variance can be written:

$$\hat{\sigma}_\epsilon^2 = \text{SSE}/(M - N - (K - 1))$$

Alternatively, an equivalent way to express the error variance is

$$\hat{\sigma}_\epsilon^2 = \tilde{\mathbf{u}}'\mathbf{Q}_0\tilde{\mathbf{u}}/(M - N - (K - 1))$$

where the residuals $\tilde{\mathbf{u}}$ are given by $\tilde{\mathbf{u}} = (\mathbf{I}_M - \mathbf{j}_M\mathbf{j}_M'/M)(\mathbf{y} - \mathbf{X}_s\tilde{\beta}_s)$ if there is an intercept and by $\tilde{\mathbf{u}} = (\mathbf{y} - \mathbf{X}_s\tilde{\beta}_s)$ if there is not. The drawback is that the formula changes (but the results do not) with the inclusion of a constant.

The variance covariance matrix of $\tilde{\beta}_s$ is given by:

$$\text{Var}[\tilde{\beta}_s] = \hat{\sigma}_\epsilon^2(\tilde{\mathbf{X}}_s'\tilde{\mathbf{X}}_s)^{-1}$$

The covariance of the dummy variables and the dummy variables with the $\tilde{\beta}_s$ is dependent on whether the intercept is included in the model.

- *no intercept:*

$$\text{Var}[\gamma_i] = \text{Var}[D_i] = \frac{\hat{\sigma}_\epsilon^2}{T_i} + \tilde{\mathbf{x}}_i'\text{Var}[\tilde{\beta}_s]\tilde{\mathbf{x}}_i$$

$$\text{Cov}[\gamma_i, \gamma_j] = \text{Cov}[D_i, D_j] = \tilde{\mathbf{x}}_i'\text{Var}[\tilde{\beta}_s]\tilde{\mathbf{x}}_j$$

$$\text{Cov}[\gamma_i, \tilde{\beta}_s] = \text{Cov}[D_i, \tilde{\beta}_s] = -\tilde{\mathbf{x}}_i'\text{Var}[\tilde{\beta}_s]$$

- *intercept*:

$$\text{Var}[D_i] = \frac{\hat{\sigma}_\epsilon^2}{T_i} + (\bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{N\cdot})' \text{Var}[\tilde{\beta}_s] (\bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{N\cdot})$$

$$\text{Cov}[D_i, D_j] = \frac{\hat{\sigma}_\epsilon^2}{T_i} + (\bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{N\cdot})' \text{Var}[\tilde{\beta}_s] (\bar{\mathbf{x}}_j - \bar{\mathbf{x}}_{N\cdot})$$

$$\text{Var}[\text{Intercept}] = \text{Var}[\gamma_N] = \frac{\hat{\sigma}_\epsilon^2}{T_N} + \bar{\mathbf{x}}_N' \text{Var}[\tilde{\beta}_s] \bar{\mathbf{x}}_N$$

$$\text{Cov}[D_i, \tilde{\beta}_s] = -(\bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{N\cdot})' \text{Var}[\tilde{\beta}_s]$$

$$\text{Cov}[\text{Intercept}, D_i] = -\frac{\hat{\sigma}_\epsilon^2}{T_i} + \bar{\mathbf{x}}_N' \text{Var}[\tilde{\beta}_s] (\bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{N\cdot})$$

$$\text{Cov}[\text{Intercept}, \tilde{\beta}_s] = -\bar{\mathbf{x}}_N' \text{Var}[\tilde{\beta}_s]$$

Alternatively, the model option `FIXONETIME` estimates a one-way model where the heterogeneity comes from time effects. This option is analogous to re-sorting the data by time and then by cross section and running a `FIXONE` model. The advantage of using the `FIXONETIME` option is that sorting is avoided and the model remains labeled correctly.

The Two-Way Fixed-Effects Model

The specification for the two-way fixed-effects model is

$$u_{it} = \gamma_i + \alpha_t + \epsilon_{it}$$

where the γ_i s and α_t s are nonrandom parameters to be estimated.

If you do not specify the `NOINT` option, which suppresses the intercept, the estimates for the fixed effects are reported under the restriction that $\gamma_N = 0$ and $\alpha_T = 0$. If you specify the `NOINT` option to suppress the intercept, only the restriction $\alpha_T = 0$ is imposed.

Balanced Panels

Assume that the data are balanced (for example, all cross sections have T observations). Then you can write the following:

$$\tilde{y}_{it} = y_{it} - \bar{y}_i - \bar{y}_{\cdot t} + \bar{\bar{y}}$$

$$\tilde{\mathbf{x}}_{it} = \mathbf{x}_{it} - \bar{\mathbf{x}}_i - \bar{\mathbf{x}}_{\cdot t} + \bar{\bar{\mathbf{x}}}$$

where the symbols:

y_{it} and \mathbf{x}_{it} are the dependent variable (a scalar) and the explanatory variables (a vector whose columns are the explanatory variables not including a constant), respectively

$\bar{y}_{i\cdot}$ and $\bar{\mathbf{x}}_{i\cdot}$ are cross section means

$\bar{y}_{\cdot t}$ and $\bar{\mathbf{x}}_{\cdot t}$ are time means

$\bar{\bar{y}}$ and $\bar{\bar{\mathbf{x}}}$ are the overall means

The two-way fixed-effects model is simply a regression of \tilde{y}_{it} on $\tilde{\mathbf{x}}_{it}$. Therefore, the two-way β is given by:

$$\tilde{\beta}_s = (\tilde{\mathbf{X}}' \tilde{\mathbf{X}})^{-1} \tilde{\mathbf{X}}' \tilde{\mathbf{y}}$$

The calculations of cross section dummy variables, time dummy variables, and intercepts follow in a fashion similar to that used in the one-way model.

First, you obtain the net cross-sectional and time effects. Denote the cross-sectional effects by γ and the time effects by α . These effects are calculated from the following relations:

$$\hat{\gamma}_i = (\bar{y}_{i\cdot} - \bar{\bar{y}}) - \tilde{\beta}_s (\bar{\mathbf{x}}_{i\cdot} - \bar{\bar{\mathbf{x}}})$$

$$\hat{\alpha}_t = (\bar{y}_{\cdot t} - \bar{\bar{y}}) - \tilde{\beta}_s (\bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}})$$

Denote the cross-sectional dummy variables and time dummy variables with the superscript C and T. Under the NOINT option the following equations give the dummy variables:

$$D_i^C = \hat{\gamma}_i + \hat{\alpha}_T$$

$$D_t^T = \hat{\alpha}_t - \hat{\alpha}_T$$

When an intercept is specified, the equations for dummy variables and intercept are:

$$D_i^C = \hat{\gamma}_i - \hat{\gamma}_N$$

$$D_t^T = \hat{\alpha}_t - \hat{\alpha}_T$$

$$\text{Intercept} = \hat{\gamma}_N + \hat{\alpha}_T$$

The sum of squared errors is:

$$\text{SSE} = \sum_{i=1}^N \sum_{t=1}^{T_i} (y_{it} - \gamma_i - \alpha_t - \mathbf{X}_s \tilde{\beta}_s)^2$$

The estimated error variance is:

$$\hat{\sigma}_\epsilon^2 = \text{SSE} / (M - N - T - (K - 1))$$

With or without a constant, the variance covariance matrix of $\tilde{\beta}_s$ is given by:

$$\text{Var}[\tilde{\beta}_s] = \hat{\sigma}_\epsilon^2 (\tilde{\mathbf{X}}_s' \tilde{\mathbf{X}}_s)^{-1}$$

Variance Covariance of Dummy Variables with No Intercept

The variances and covariances of the dummy variables are given with the NOINT specification as follows:

$$\begin{aligned}\text{Var}\left(D_i^C\right) &= \hat{\sigma}_\epsilon^2 \left(\frac{1}{T} + \frac{1}{N} - \frac{1}{NT} \right) \\ &+ \left(\bar{\mathbf{x}}_{i\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)' \text{Var}\left[\tilde{\beta}_s\right] \left(\bar{\mathbf{x}}_{i\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)\end{aligned}$$

$$\text{Var}\left(D_i^T\right) = \frac{2\hat{\sigma}_\epsilon^2}{N} + \left(\bar{\mathbf{x}}_{\cdot t} - \bar{\mathbf{x}}_{\cdot T} \right)' \text{Var}\left[\tilde{\beta}_s\right] \left(\bar{\mathbf{x}}_{\cdot t} - \bar{\mathbf{x}}_{\cdot T} \right)$$

$$\begin{aligned}\text{Cov}\left(D_i^C, D_j^C\right) &= \hat{\sigma}_\epsilon^2 \left(\frac{1}{N} - \frac{1}{NT} \right) \\ &+ \left(\bar{\mathbf{x}}_{i\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)' \text{Var}\left[\tilde{\beta}_s\right] \left(\bar{\mathbf{x}}_{j\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)\end{aligned}$$

$$\text{Cov}\left(D_i^T, D_u^T\right) = \frac{\hat{\sigma}_\epsilon^2}{N} + \left(\bar{\mathbf{x}}_{\cdot t} - \bar{\mathbf{x}}_{\cdot T} \right)' \text{Var}\left[\tilde{\beta}_s\right] \left(\bar{\mathbf{x}}_{\cdot u} - \bar{\mathbf{x}}_{\cdot T} \right)$$

$$\text{Cov}\left(D_i^C, D_i^T\right) = -\frac{\hat{\sigma}_\epsilon^2}{N} + \left(\bar{\mathbf{x}}_{i\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)' \text{Var}\left[\tilde{\beta}_s\right] \left(\bar{\mathbf{x}}_{\cdot t} - \bar{\mathbf{x}}_{\cdot T} \right)$$

$$\text{Cov}\left(D_i^C, \beta\right) = -\left(\bar{\mathbf{x}}_{i\cdot} + \bar{\mathbf{x}}_{\cdot t} - \bar{\bar{\mathbf{x}}} \right)' \text{Var}\left[\tilde{\beta}_s\right]$$

$$\text{Cov}\left(D_i^T, \beta\right) = -\left(\bar{\mathbf{x}}_{\cdot t} - \bar{\mathbf{x}}_{\cdot T} \right)' \text{Var}\left[\tilde{\beta}_s\right]$$

Variance Covariance of Dummy Variables with Intercept

The variances and covariances of the dummy variables are given when the intercept is included as follows:

$$\begin{aligned}
 \text{Var} \left(D_i^C \right) &= \frac{\hat{\sigma}_\epsilon^2}{T} + (\bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{N\cdot})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{N\cdot}) \\
 \text{Var} \left(D_t^T \right) &= \frac{2\hat{\sigma}_\epsilon^2}{N} + (\bar{\mathbf{x}}_t - \bar{\mathbf{x}}_{\cdot T})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_t - \bar{\mathbf{x}}_{\cdot T}) \\
 \text{Var} (\text{Intercept}) &= \hat{\sigma}_\epsilon^2 \left(\frac{1}{T} + \frac{1}{N} - \frac{1}{NT} \right) + (\bar{\mathbf{x}}_{N\cdot} + \bar{\mathbf{x}}_{\cdot T} - \bar{\bar{\mathbf{x}}})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_{N\cdot} + \bar{\mathbf{x}}_{\cdot T} - \bar{\bar{\mathbf{x}}}) \\
 \text{Cov} \left(D_i^C, D_j^C \right) &= \frac{\hat{\sigma}_\epsilon^2}{T} + (\bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{N\cdot})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_{j\cdot} - \bar{\mathbf{x}}_{N\cdot}) \\
 \text{Cov} \left(D_t^T, D_u^T \right) &= (\bar{\mathbf{x}}_t - \bar{\mathbf{x}}_{\cdot T})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_u - \bar{\mathbf{x}}_{\cdot T}) \\
 \text{Cov} \left(D_i^C, \text{Intercept} \right) &= - \left(\frac{\hat{\sigma}_\epsilon^2}{T} \right) + (\bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{N\cdot})' \text{Var} \left(\tilde{\beta}_s \right) (\bar{\mathbf{x}}_{N\cdot} + \bar{\mathbf{x}}_{\cdot T} - \bar{\bar{\mathbf{x}}}) \\
 \text{Cov} \left(D_t^T, \text{Intercept} \right) &= - \left(\frac{\hat{\sigma}_\epsilon^2}{N} \right) + (\bar{\mathbf{x}}_t - \bar{\mathbf{x}}_{\cdot T})' \text{Var} \left[\tilde{\beta}_s \right] (\bar{\mathbf{x}}_{N\cdot} + \bar{\mathbf{x}}_{\cdot T} - \bar{\bar{\mathbf{x}}}) \\
 \text{Cov} \left(D_i^C, \tilde{\beta} \right) &= - (\bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{N\cdot})' \text{Var} \left[\tilde{\beta}_s \right] \\
 \text{Cov} \left(D_t^T, \tilde{\beta} \right) &= - (\bar{\mathbf{x}}_t - \bar{\mathbf{x}}_{\cdot T})' \text{Var} \left[\tilde{\beta}_s \right] \\
 \text{Cov} \left(\text{Intercept}, \tilde{\beta} \right) &= - (\bar{\mathbf{x}}_{N\cdot} + \bar{\mathbf{x}}_{\cdot T} - \bar{\bar{\mathbf{x}}})' \text{Var} \left[\tilde{\beta}_s \right]
 \end{aligned}$$

Unbalanced Panels

Let \mathbf{X}_* and \mathbf{y}_* be the independent and dependent variables arranged by time and by cross section within each time period. (Note that the input data set used by the PANEL procedure must be sorted by cross section and then by time within each cross section.) Let M_t be the number of cross sections observed in year t and let $\sum_t M_t = M$. Let \mathbf{D}_t be the $M_t \times N$ matrix obtained from the $N \times N$ identity matrix from which rows that correspond to cross sections not observed at time t have been omitted. Consider

$$\mathbf{Z} = (\mathbf{Z}_1, \mathbf{Z}_2)$$

where $\mathbf{Z}_1 = (\mathbf{D}'_1, \mathbf{D}'_2, \dots, \mathbf{D}'_T)'$ and $\mathbf{Z}_2 = \text{diag}(\mathbf{D}_1 \mathbf{j}_N, \mathbf{D}_2 \mathbf{j}_N, \dots, \mathbf{D}_T \mathbf{j}_N)$. The matrix \mathbf{Z} gives the dummy variable structure for the two-way model.

Let

$$\Delta_N = \mathbf{Z}'_1 \mathbf{Z}_1$$

$$\Delta_T = \mathbf{Z}'_2 \mathbf{Z}_2$$

$$\mathbf{A} = \mathbf{Z}'_2 \mathbf{Z}_1$$

$$\bar{\mathbf{Z}} = \mathbf{Z}_2 - \mathbf{Z}_1 \Delta_N^{-1} \mathbf{A}'$$

$$\mathbf{Q} = \Delta_T - \mathbf{A} \Delta_N^{-1} \mathbf{A}'$$

$$\mathbf{P} = (\mathbf{I}_M - \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1) - \bar{\mathbf{Z}} \mathbf{Q}^{-1} \bar{\mathbf{Z}}'$$

The estimate of the regression slope coefficients is given by

$$\tilde{\beta}_s = (\mathbf{X}_{*s}' \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}_{*s}' \mathbf{P} \mathbf{y}_*$$

where \mathbf{X}_{*s} is the \mathbf{X}_* matrix without the vector of 1s.

The estimator of the error variance is

$$\hat{\sigma}_\epsilon^2 = \tilde{\mathbf{u}}' \mathbf{P} \tilde{\mathbf{u}} / (M - T - N + 1 - (K - 1))$$

where the residuals are given by $\tilde{\mathbf{u}} = (\mathbf{I}_M - \mathbf{j}_M \mathbf{j}_M' / M)(\mathbf{y}_* - \mathbf{X}_{*s} \tilde{\beta}_s)$ if there is an intercept in the model and by $\tilde{\mathbf{u}} = \mathbf{y}_* - \mathbf{X}_{*s} \tilde{\beta}_s$ if there is no intercept.

The actual implementation is quite different from the theory. The PANEL procedure transforms all series using the \mathbf{P} matrix.

$$\bar{\mathbf{v}} = \mathbf{P} \mathbf{v}$$

The variable being transformed is v , which could be \mathbf{y} or any column of \mathbf{X} . After the data are properly transformed, OLS is run on the resulting series.

Given $\tilde{\beta}_s$, the next step is estimating the cross-sectional and time effects. Given that $\boldsymbol{\gamma}$ is the column vector of cross-sectional effects and $\boldsymbol{\alpha}$ is the column vector of time effects,

$$\tilde{\boldsymbol{\alpha}} = \mathbf{Q}^{-1} \bar{\mathbf{Z}}' \mathbf{y} - \mathbf{Q}^{-1} \bar{\mathbf{Z}}' \mathbf{X}_s \tilde{\beta}_s$$

$$\tilde{\boldsymbol{\gamma}} = (\Theta_1 + \Theta_2 - \Theta_3) \mathbf{y} - (\Theta_1 + \Theta_2 - \Theta_3) \mathbf{X}_s \tilde{\beta}_s$$

$$\Theta_1 = \Delta_N^{-1} \mathbf{Z}_1'$$

$$\Theta_2 = \Delta_N^{-1} \mathbf{A}' \mathbf{Q}^{-1} \mathbf{Z}_2'$$

$$\Theta_3 = \Delta_N^{-1} \mathbf{A}' \mathbf{Q}^{-1} \mathbf{A} \Delta_N^{-1} \mathbf{Z}_1'$$

Given the cross-sectional and time effects, the next step is to derive the associated dummy variables. Using the NOINT option, the following equations give the dummy variables:

$$D_i^C = \hat{\gamma}_i + \hat{\alpha}_T$$

$$D_t^T = \hat{\alpha}_t - \hat{\alpha}_T$$

When an intercept is desired, the equations for dummy variables and intercept are:

$$D_i^C = \hat{\gamma}_i - \hat{\gamma}_N$$

$$D_t^T = \hat{\alpha}_t - \hat{\alpha}_T$$

$$\text{Intercept} = \hat{\gamma}_N + \hat{\alpha}_T$$

The calculation of the variance-covariance matrix is as follows:

$$\begin{aligned} \text{Var}[\hat{\boldsymbol{\gamma}}] &= \hat{\sigma}_\epsilon^2 (\Delta_N^{-1} - \Sigma_1 + \Sigma_2) \\ &+ (\Theta_1 + \Theta_2 - \Theta_3) \text{Var}[\tilde{\beta}_s] (\Theta_1 + \Theta_2 - \Theta_3)' \end{aligned}$$

where

$$\Sigma_1 = \Delta_N^{-1} \mathbf{A}' \mathbf{Q}^{-1} \mathbf{A} \Delta_N^{-1} \mathbf{A}' \mathbf{Q}^{-1} \mathbf{A} \Delta_N^{-1}$$

$$\Sigma_2 = \Delta_N^{-1} \mathbf{A}' \mathbf{Q}^{-1} \Delta_T \mathbf{Q}^{-1} \mathbf{A} \Delta_N$$

$$\text{Var}[\hat{\alpha}] = \hat{\sigma}_\epsilon^2 \left(\mathbf{Q}^{-1} \bar{\mathbf{Z}}' \bar{\mathbf{Z}} \mathbf{Q}^{-1} \right) + \left(\mathbf{Q}^{-1} \bar{\mathbf{Z}}' \mathbf{X}_s \right) \text{Var}[\tilde{\beta}_s] \left(\mathbf{X}_s' \bar{\mathbf{Z}} \mathbf{Q}^{-1} \right)$$

$$\begin{aligned} \text{Cov}[\hat{\alpha}, \hat{\gamma}'] &= \hat{\sigma}_\epsilon^2 \Delta_N^{-1} \left[\mathbf{A}' \mathbf{Q}^{-1} \Delta_T - \mathbf{A}' \mathbf{Q}^{-1} \mathbf{A} \Delta_N^{-1} \mathbf{A}' \right] \mathbf{Q}^{-1} \\ &+ (\Theta_1 + \Theta_2 - \Theta_3) \text{Var}[\tilde{\beta}_s] \left(\mathbf{X}_s' \bar{\mathbf{Z}} \mathbf{Q}^{-1} \right) \end{aligned}$$

$$\text{Cov}[\hat{\gamma}, \tilde{\beta}] = (\Theta_1 + \Theta_2 - \Theta_3) \text{Var}[\tilde{\beta}_s]$$

$$\text{Cov}[\hat{\alpha}, \tilde{\beta}] = \left(\mathbf{Q}^{-1} \bar{\mathbf{Z}}' \mathbf{X}_s \right) \text{Var}[\tilde{\beta}_s]$$

Now you work out the variance covariance estimates for the dummy variables.

Variance Covariance of Dummy variables with No Intercept

The variances and covariances of the dummy variables are given under the NOINT selection as follows:

$$\text{Cov}(D_i^C, D_j^C) = \text{Cov}(\hat{\gamma}_i, \hat{\gamma}_j) + \text{Cov}(\hat{\gamma}_i, \hat{\alpha}_T) + \text{Cov}(\hat{\gamma}_j, \hat{\alpha}_T) + \text{Var}(\hat{\alpha}_T)$$

$$\text{Cov}(D_t^T, D_u^T) = \text{Cov}(\hat{\alpha}_t, \hat{\alpha}_u) - \text{Cov}(\hat{\alpha}_t, \hat{\alpha}_T) - \text{Cov}(\hat{\alpha}_u, \hat{\alpha}_T) + \text{Var}(\hat{\alpha}_T)$$

$$\text{Cov}(D_i^C, D_t^T) = \text{Cov}(\hat{\gamma}_i, \hat{\alpha}_t) + \text{Cov}(\hat{\gamma}_i, \hat{\alpha}_T) - \text{Cov}(\hat{\gamma}_i, \hat{\alpha}_T) - \text{Var}(\hat{\alpha}_T)$$

$$\text{Cov}(D_i^C, \tilde{\beta}) = -\text{Cov}(\hat{\gamma}_i, \tilde{\beta}) - \text{Cov}(\hat{\alpha}_T, \tilde{\beta})$$

$$\text{Cov}(D_t^T, \tilde{\beta}) = -\text{Cov}(\hat{\alpha}_t, \tilde{\beta}) + \text{Cov}(\hat{\alpha}_T, \tilde{\beta})$$

Variance Covariance of Dummy variables with Intercept

The variances and covariances of the dummy variables are given as follows when the intercept is included:

$$\begin{aligned}
 \text{Cov} \left(D_i^C, D_j^C \right) &= \text{Cov} \left(\hat{\gamma}_i, \hat{\gamma}_j \right) - \text{Cov} \left(\hat{\gamma}_i, \hat{\gamma}_N \right) - \text{Cov} \left(\hat{\gamma}_j, \hat{\gamma}_N \right) + \text{Var} \left(\hat{\gamma}_N \right) \\
 \text{Cov} \left(D_t^T, D_u^T \right) &= \text{Cov} \left(\hat{\alpha}_t, \hat{\alpha}_u \right) - \text{Cov} \left(\hat{\alpha}_t, \hat{\alpha}_T \right) - \text{Cov} \left(\hat{\alpha}_u, \hat{\alpha}_T \right) + \text{Var} \left(\hat{\alpha}_T \right) \\
 \text{Cov} \left(D_i^C, D_t^T \right) &= \text{Cov} \left(\hat{\gamma}_i, \hat{\alpha}_t \right) - \text{Cov} \left(\hat{\gamma}_i, \hat{\alpha}_T \right) - \text{Cov} \left(\hat{\gamma}_N, \hat{\alpha}_t \right) + \text{Cov} \left(\hat{\gamma}_N, \hat{\alpha}_T \right) \\
 \text{Cov} \left(D_i^C, \text{Intercept} \right) &= \text{Cov} \left(\hat{\gamma}_i, \hat{\gamma}_N \right) + \text{Cov} \left(\hat{\gamma}_i, \hat{\alpha}_T \right) - \text{Cov} \left(\hat{\gamma}_j, \hat{\alpha}_T \right) - \text{Var} \left(\hat{\gamma}_N \right) \\
 \text{Cov} \left(D_t^T, \text{Intercept} \right) &= \text{Cov} \left(\hat{\alpha}_t, \hat{\alpha}_T \right) + \text{Cov} \left(\hat{\alpha}_t, \hat{\gamma}_N \right) - \text{Cov} \left(\hat{\alpha}_T, \hat{\alpha}_N \right) - \text{Var} \left(\hat{\alpha}_T \right) \\
 \text{Cov} \left(D_i^C, \tilde{\beta} \right) &= -\text{Cov} \left(\hat{\gamma}_i, \tilde{\beta} \right) - \text{Cov} \left(\hat{\gamma}_N, \tilde{\beta} \right) \\
 \text{Cov} \left(D_t^T, \tilde{\beta} \right) &= -\text{Cov} \left(\hat{\alpha}_t, \tilde{\beta} \right) + \text{Cov} \left(\hat{\alpha}_T, \tilde{\beta} \right) \\
 \text{Cov} \left(\text{Intercept}, \tilde{\beta}_f \right) &= -\text{Cov} \left(\hat{\alpha}_T, \tilde{\beta} \right) - \text{Cov} \left(\hat{\gamma}_N, \tilde{\beta} \right)
 \end{aligned}$$

Between Estimators

The between groups estimator is the regression of the cross section means of \mathbf{y} on the cross section means of $\tilde{\mathbf{X}}_s$. In other words, you fit the following regression:

$$\bar{y}_{i\cdot} = \bar{\mathbf{x}}_{i\cdot} \beta^{BG} + \eta_i$$

The between time periods estimator is the regression of the time means of \mathbf{y} on the time means of $\tilde{\mathbf{X}}_s$. In other words, you fit the following regression:

$$\bar{y}_{\cdot t} = \bar{\mathbf{x}}_{\cdot t} \beta^{BT} + \zeta_t$$

In either case, the error is assumed to be normally distributed with mean zero and a constant variance.

Pooled Estimator

PROC PANEL allows you to pool time series cross-sectional data and run regressions on the data. Pooling is admissible if there are no fixed effects or random effects present in the data. This feature is included to aid in analysis and comparison across model types and to give you access to HCCME standard errors and other panel diagnostics. In general, this model type should not be used with time series cross-sectional data.

The One-Way Random-Effects Model

The specification for the one-way random-effects model is

$$u_{it} = v_i + \epsilon_{it}$$

Let $\mathbf{Z}_0 = \text{diag}(\mathbf{J}_{T_i})$, $\mathbf{P}_0 = \text{diag}(\bar{\mathbf{J}}_{T_i})$, and $\mathbf{Q}_0 = \text{diag}(\mathbf{E}_{T_i})$, with $\bar{\mathbf{J}}_{T_i} = \mathbf{J}_{T_i}/T_i$ and $\mathbf{E}_{T_i} = \mathbf{I}_{T_i} - \bar{\mathbf{J}}_{T_i}$. Define $\tilde{\mathbf{X}}_s = \mathbf{Q}_0\mathbf{X}_s$ and $\tilde{\mathbf{y}} = \mathbf{Q}_0\mathbf{y}$ and \mathbf{J} as a vector of ones T_i long.

In the one-way model, estimation proceeds in a two-step fashion. First, you obtain estimates of the variance of the σ_ϵ^2 and σ_v^2 . There are multiple ways to derive these estimates; PROC PANEL provides four options. All four options are valid for balanced or unbalanced panels. Once these estimates are in hand, they are used to form a weighting factor θ , and estimation proceeds via OLS on partial deviations from group means.

PROC PANEL gives the following options for variance component estimators.

Fuller and Battese's Method

The Fuller and Battese method for estimating variance components can be obtained with the option VCOMP = FB and the option RANONE. The variance components are given by the following equations (see Baltagi and Chang (1994) and Fuller and Battese (1974) for the approach in the two-way model). Let

$$R(v) = \mathbf{y}'\mathbf{Z}_0(\mathbf{Z}_0'\mathbf{Z}_0)^{-1}\mathbf{Z}_0'\mathbf{y}$$

$$R(\beta|v) = ((\tilde{\mathbf{X}}_s'\tilde{\mathbf{X}}_s)^{-1}\tilde{\mathbf{X}}_s'\tilde{\mathbf{y}})'(\tilde{\mathbf{X}}_s'\tilde{\mathbf{y}})$$

$$R(\beta) = (\mathbf{X}_s'\mathbf{y})'(\mathbf{X}_s'\mathbf{X}_s)^{-1}\mathbf{X}_s'\mathbf{y}$$

$$R(v|\beta) = R(\beta|v) + R(v) - R(\beta)$$

The estimator of the error variance is given by

$$\hat{\sigma}_\epsilon^2 = (\mathbf{y}'\mathbf{y} - R(\beta|v) - R(v))/(M - N - (K - 1))$$

If the NOINT option is specified, the estimator is

$$\hat{\sigma}_\epsilon^2 = (\mathbf{y}'\mathbf{y} - R(\beta|v) - R(v))/(M - N - K)$$

The estimator of the cross-sectional variance component is given by

$$\hat{\sigma}_v^2 = (R(v|\beta) - (N - 1)\hat{\sigma}_\epsilon^2)/(M - \text{tr}(\mathbf{Z}_0'\mathbf{X}_s(\mathbf{X}_s'\mathbf{X}_s)^{-1}\mathbf{X}_s'\mathbf{Z}_0))$$

Note that the error variance is the variance of the residual of the within estimator.

According to Baltagi and Chang (1994), the Fuller and Battese method is appropriate to apply to both balanced and unbalanced data. The Fuller and Battese method is the default for estimation of one-way random-effects models with balanced panels. However, the Fuller and Battese method does not always obtain nonnegative estimates for the cross section (or group) variance. In the case of a negative estimate, a warning is printed and the estimate is set to zero.

Wansbeek and Kapteyn's Method

The Wansbeek and Kapteyn method for estimating variance components can be obtained by setting VCOMP = WK (together with the option RANONE). The estimation of the one-way unbalanced data model is performed by using a specialization (Baltagi and Chang 1994) of the approach used by Wansbeek and Kapteyn (1989) for unbalanced two-way models. The Wansbeek and Kapteyn method is the default for unbalanced data. If just RANONE is specified, without the VCOMP= option, PROC PANEL estimates the variance component under Wansbeek and Kapteyn's method.

The estimation of the variance components is performed by using a quadratic unbiased estimation (QUE) method. This involves focusing on quadratic forms of the centered residuals, equating their expected values to the realized quadratic forms, and solving for the variance components.

Let

$$q_1 = \tilde{\mathbf{u}}' \mathbf{Q}_0 \tilde{\mathbf{u}}$$

$$q_2 = \tilde{\mathbf{u}}' \mathbf{P}_0 \tilde{\mathbf{u}}$$

where the residuals $\tilde{\mathbf{u}}$ are given by $\tilde{\mathbf{u}} = (\mathbf{I}_M - \mathbf{j}_M \mathbf{j}'_M / M)(\mathbf{y} - \mathbf{X}_s (\tilde{\mathbf{X}}'_s \tilde{\mathbf{X}}_s)^{-1} \tilde{\mathbf{X}}'_s \tilde{\mathbf{y}})$ if there is an intercept and by $\tilde{\mathbf{u}} = \mathbf{y} - \mathbf{X}_s (\tilde{\mathbf{X}}'_s \tilde{\mathbf{X}}_s)^{-1} \tilde{\mathbf{X}}'_s \tilde{\mathbf{y}}$ if there is not. A vector of M ones is represented by \mathbf{j} .

Consider the expected values

$$E(q_1) = (M - N - (K - 1))\sigma_\epsilon^2$$

$$E(q_2) = (N - 1 + \text{tr}[(\mathbf{X}'_s \mathbf{Q}_0 \mathbf{X}_s)^{-1} \mathbf{X}'_s \mathbf{P}_0 \mathbf{X}_s] - \text{tr}[(\mathbf{X}'_s \mathbf{Q}_0 \mathbf{X}_s)^{-1} \mathbf{X}'_s \bar{\mathbf{J}}_M \mathbf{X}_s])\sigma_\epsilon^2 \\ [M - (\sum_i T_i^2 / M)]\sigma_v^2$$

where $\hat{\sigma}_\epsilon^2$ and $\hat{\sigma}_v^2$ are obtained by equating the quadratic forms to their expected values.

The estimator of the error variance is the residual variance of the within estimate. The Wansbeek and Kapteyn method can also generate negative variance components estimates.

Wallace and Hussain's Method

The Wallace and Hussain method for estimating variance components can be obtained by setting VCOMP = WH (together with the option RANONE). Wallace-Hussain estimates start from OLS residuals on a data that are assumed to exhibit groupwise heteroscedasticity. As in the Wansbeek and Kapteyn method, you start with

$$q_1 = \tilde{\mathbf{u}}'_{OLS} \mathbf{Q}_0 \tilde{\mathbf{u}}_{OLS}$$

$$q_2 = \tilde{\mathbf{u}}'_{OLS} \mathbf{P}_0 \tilde{\mathbf{u}}_{OLS}$$

However, instead of using the 'true' errors, you substitute the OLS residuals. You solve the system

$$E(\hat{q}_1) = E(\hat{\mathbf{u}}'_{OLS} \mathbf{Q}_0 \hat{\mathbf{u}}_{OLS}) = \delta_{11} \hat{\sigma}_v^2 + \delta_{12} \hat{\sigma}_\epsilon^2$$

$$E(\hat{q}_2) = E(\hat{\mathbf{u}}'_{OLS} \mathbf{P}_0 \hat{\mathbf{u}}_{OLS}) = \delta_{21} \hat{\sigma}_v^2 + \delta_{22} \hat{\sigma}_\epsilon^2$$

The constants $\delta_{11}, \delta_{12}, \delta_{21}, \delta_{22}$ are given by

$$\delta_{11} = \text{tr} \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{Z}_0\mathbf{Z}_0'\mathbf{X} \right) - \text{tr} \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{P}_0\mathbf{X} \left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{Z}_0\mathbf{Z}_0'\mathbf{X} \right)$$

$$\delta_{12} = M - N - K + \text{tr} \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{P}_0\mathbf{X} \right)$$

$$\delta_{21} = M - 2tr \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{Z}_0\mathbf{Z}_0'\mathbf{X} \right) + \text{tr} \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{P}_0\mathbf{X} \right)$$

$$\delta_{22} = N - \text{tr} \left(\left(\mathbf{X}'\mathbf{X} \right)^{-1} \mathbf{X}'\mathbf{P}_0\mathbf{X} \right)$$

where $\text{tr}()$ is the trace operator on a square matrix.

Solving this system produces the variance components. This method is applicable to balanced and unbalanced panels. However, there is no guarantee of positive variance components. Any negative values are fixed equal to zero.

Nerlove's Method

The Nerlove method for estimating variance components can be obtained by setting `VCOMP = NL`. The Nerlove method (see Baltagi 1995, page 17) is assured to give estimates of the variance components that are always positive. Furthermore, it is simple in contrast to the previous estimators.

If γ_i is the i th fixed effect, Nerlove's method uses the variance of the fixed effects as the estimate of $\hat{\sigma}_v^2$. You have $\hat{\sigma}_v^2 = \sum_{i=1}^N \frac{(\gamma_i - \bar{\gamma})^2}{N-1}$, where $\bar{\gamma}$ is the mean fixed effect. The estimate of σ_ϵ^2 is simply the residual sum of squares of the one-way fixed-effects regression divided by the number of observations.

With the variance components in hand, from any method, the next task is to estimate the regression model of interest. For each individual, you form a weight (θ_i) as follows:

$$\theta_i = 1 - \sigma_\epsilon / w_i$$

$$w_i^2 = T_i \sigma_v^2 + \sigma_\epsilon^2$$

where T_i is the i th cross section's time observations.

Taking the θ_i , you form the partial deviations,

$$\tilde{y}_{it} = y_{it} - \theta_i \bar{y}_i$$

$$\tilde{x}_{it} = x_{it} - \theta_i \bar{x}_i$$

where \bar{y}_i and \bar{x}_i are cross section means of the dependent variable and independent variables (including the constant if any), respectively.

The random-effects β is then the result of simple OLS on the transformed data.

The Two-Way Random-Effects Model

The specification for the two-way random-effects model is

$$u_{it} = v_i + e_t + \epsilon_{it}$$

As in the one-way random-effects model, the PANEL procedure provides four options for variance component estimators. Unlike the one-way random-effects model, unbalanced panels present some special concerns.

Let \mathbf{X}_* and \mathbf{y}_* be the independent and dependent variables arranged by time and by cross section within each time period. (Note that the input data set used by the PANEL procedure must be sorted by cross section and then by time within each cross section.) Let M_t be the number of cross sections observed in time t and $\sum_t M_t = M$. Let \mathbf{D}_t be the $M_t \times N$ matrix obtained from the $N \times N$ identity matrix from which rows that correspond to cross sections not observed at time t have been omitted. Consider

$$\mathbf{Z} = (\mathbf{Z}_1, \mathbf{Z}_2)$$

where $\mathbf{Z}_1 = (\mathbf{D}'_1, \mathbf{D}'_2, \dots, \mathbf{D}'_T)'$ and $\mathbf{Z}_2 = \text{diag}(\mathbf{D}_1 \mathbf{j}_N, \mathbf{D}_2 \mathbf{j}_N, \dots, \mathbf{D}_T \mathbf{j}_N)$.

The matrix \mathbf{Z} gives the dummy variable structure for the two-way model.

For notational ease, let

$$\Delta_N = \mathbf{Z}'_1 \mathbf{Z}_1, \Delta_T = \mathbf{Z}'_2 \mathbf{Z}_2, \mathbf{A} = \mathbf{Z}'_2 \mathbf{Z}_1$$

$$\bar{\mathbf{Z}} = \mathbf{Z}_2 - \mathbf{Z}_1 \Delta_N^{-1} \mathbf{A}'$$

$$\bar{\Delta}_1 = \mathbf{I}_M - \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1$$

$$\bar{\Delta}_2 = \mathbf{I}_M - \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}'_2$$

$$\mathbf{Q} = \Delta_T - \mathbf{A} \Delta_N^{-1} \mathbf{A}'$$

$$\mathbf{P} = (\mathbf{I}_M - \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1) - \bar{\mathbf{Z}} \mathbf{Q}^{-1} \bar{\mathbf{Z}}'$$

Fuller and Battese's Method

The Fuller and Battese method for estimating variance components can be obtained by setting VCOMP = FB (with the option RANTWO). FB is the default method for a RANTWO model with balanced panel. If RANTWO is requested without specifying the VCOMP= option, PROC PANEL proceeds under the Fuller and Battese method.

Following the discussion in Baltagi, et. al. (2002), the Fuller and Battese method forms the estimates as follows.

The estimator of the error variance is

$$\hat{\sigma}_\epsilon^2 = \tilde{\mathbf{u}}' \mathbf{P} \tilde{\mathbf{u}} / (M - T - N + 1 - (K - 1))$$

where \mathbf{P} is the Wansbeek and Kapteyn within estimator for unbalanced (or balanced) panel in a two-way setting.

The estimator of the error variance is the same as that in the Wansbeek and Kapteyn method.

Consider the expected values

$$\begin{aligned}
 E(q_N) &= \sigma_\epsilon^2 [M - T - K + 1] \\
 &+ \sigma_v^2 \left[M - T - \text{tr} \left(\mathbf{X}'_s \bar{\Delta}_2 \mathbf{Z}_1 \mathbf{Z}'_1 \bar{\Delta}_2 \mathbf{X}_s (\mathbf{X}'_s \bar{\Delta}_2 \mathbf{X}_s)^{-1} \right) \right] \\
 E(q_T) &= \sigma_\epsilon^2 [M - N - K + 1] \\
 &+ \sigma_e^2 \left[M - N - \text{tr} \left(\mathbf{X}'_s \bar{\Delta}_1 \mathbf{Z}_2 \mathbf{Z}'_2 \bar{\Delta}_1 \mathbf{X}_s (\mathbf{X}'_s \bar{\Delta}_1 \mathbf{X}_s)^{-1} \right) \right]
 \end{aligned}$$

Just as in the one-way case, there is always the possibility that the (estimated) variance components will be negative. In such a case, the negative components are fixed to equal zero. After substituting the group sum of the within residuals for (q_N) , the time sums of the within residuals for (q_T) , and $\hat{\sigma}_\epsilon^2$, the two equations are solved for $\hat{\sigma}_v^2$ and $\hat{\sigma}_e^2$.

Wansbeek and Kapteyn's Method

The Wansbeek and Kapteyn method for estimating variance components can be obtained by setting VCOMP = WK. The following methodology, outlined in Wansbeek and Kapteyn (1989) is used to handle both balanced and unbalanced data. The Wansbeek and Kapteyn method is the default for a RANTWO model with unbalanced panel. If RANTWO is requested without specifying the VCOMP= option, PROC PANEL proceeds under the Wansbeek and Kapteyn method if the panel is unbalanced.

The estimator of the error variance is

$$\hat{\sigma}_\epsilon^2 = \tilde{\mathbf{u}}' \mathbf{P} \tilde{\mathbf{u}} / (M - T - N + 1 - (K - 1))$$

where the $\tilde{\mathbf{u}}$ are given by $\tilde{\mathbf{u}} = (\mathbf{I}_M - \mathbf{j}_M \mathbf{j}'_M / M)(\mathbf{y}_* - \mathbf{X}_{*s}(\mathbf{X}'_{*s} \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}'_{*s} \mathbf{P} \mathbf{y}_*)$ if there is an intercept and by $\tilde{\mathbf{u}} = (\mathbf{y}_* - \mathbf{X}_{*s}(\mathbf{X}'_{*s} \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}'_{*s} \mathbf{P} \mathbf{y}_*)$ if there is not.

The estimation of the variance components is performed by using a quadratic unbiased estimation (QUE) method that involves computing on quadratic forms of the residuals $\tilde{\mathbf{u}}$, equating their expected values to the realized quadratic forms, and solving for the variance components.

Let

$$q_N = \tilde{\mathbf{u}}' \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}'_2 \tilde{\mathbf{u}}$$

$$q_T = \tilde{\mathbf{u}}' \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1 \tilde{\mathbf{u}}$$

The expected values are

$$E(q_N) = (T + k_N - (1 + k_0))\sigma^2 + (T - \frac{\lambda_1}{M})\sigma_v^2 + (M - \frac{\lambda_2}{M})\sigma_e^2$$

$$\begin{aligned}
 E(q_T) &= (N + k_T - (1 + k_0))\sigma^2 \\
 &+ (M - \frac{\lambda_1}{M})\sigma_v^2 + (N - \frac{\lambda_2}{M})\sigma_e^2
 \end{aligned}$$

where

$$\begin{aligned}
 k_0 &= \mathbf{j}'_M \mathbf{X}_{*s} (\mathbf{X}'_{*s} \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}'_{*s} \mathbf{j}_M / M \\
 k_N &= \text{tr}((\mathbf{X}'_{*s} \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}'_{*s} \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}'_2 \mathbf{X}_{*s}) \\
 k_T &= \text{tr}((\mathbf{X}'_{*s} \mathbf{P} \mathbf{X}_{*s})^{-1} \mathbf{X}'_{*s} \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1 \mathbf{X}_{*s}) \\
 \lambda_1 &= \mathbf{j}'_M \mathbf{Z}_1 \mathbf{Z}'_1 \mathbf{j}_M \\
 \lambda_2 &= \mathbf{j}'_M \mathbf{Z}_2 \mathbf{Z}'_2 \mathbf{j}_M
 \end{aligned}$$

The quadratic unbiased estimators for σ_v^2 and σ_e^2 are obtained by equating the expected values to the quadratic forms and solving for the two unknowns.

When the NOINT option is specified, the variance component equations change slightly. In particular, the following is true (Wansbeek and Kapteyn 1989):

$$\begin{aligned}
 E(q_N) &= (T + k_N)\sigma^2 + T\sigma_v^2 + M\sigma_e^2 \\
 E(q_T) &= (N + k_T)\sigma^2 + M\sigma_v^2 + N\sigma_e^2
 \end{aligned}$$

Wallace and Hussain's Method

The Wallace and Hussain method for estimating variance components can be obtained by setting VCOMP = WH. Wallace and Hussain's method is by far the most computationally intensive. It uses the OLS residuals to estimate the variance components. In other words, the Wallace and Hussain method assumes that the following holds:

$$\begin{aligned}
 q_\epsilon &= \tilde{\mathbf{u}}'_{OLS} \mathbf{P} \tilde{\mathbf{u}}_{OLS} \\
 q_N &= \tilde{\mathbf{u}}'_{OLS} \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}'_2 \tilde{\mathbf{u}}_{OLS} \\
 q_T &= \tilde{\mathbf{u}}'_{OLS} \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1 \tilde{\mathbf{u}}_{OLS}
 \end{aligned}$$

Taking expectations yields

$$\begin{aligned}
 E(q_\epsilon) &= E(\tilde{\mathbf{u}}'_{OLS} \mathbf{P} \tilde{\mathbf{u}}_{OLS}) = \delta_{11}\sigma_\epsilon^2 + \delta_{12}\sigma_v^2 + \delta_{13}\sigma_e^2 \\
 E(q_N) &= E(\tilde{\mathbf{u}}'_{OLS} \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}'_2 \tilde{\mathbf{u}}_{OLS}) = \delta_{21}\sigma_\epsilon^2 + \delta_{22}\sigma_v^2 + \delta_{23}\sigma_e^2 \\
 E(q_T) &= E(\tilde{\mathbf{u}}'_{OLS} \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}'_1 \tilde{\mathbf{u}}_{OLS}) = \delta_{31}\sigma_\epsilon^2 + \delta_{32}\sigma_v^2 + \delta_{33}\sigma_e^2
 \end{aligned}$$

where the δ_{js} constants are defined by

$$\begin{aligned}
 \delta_{11} &= M - N - T + 1 - \text{tr}\left(\mathbf{X}' \mathbf{P} \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1}\right) \\
 \delta_{12} &= \text{tr}\left(\mathbf{X}' \mathbf{Z}_1 \mathbf{Z}'_1 \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \left(\mathbf{X}' \mathbf{P} \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1}\right)\right)
 \end{aligned}$$

$$\delta_{13} = \text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \left(\mathbf{X}' \mathbf{P} \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \right)$$

$$\delta_{21} = T - \text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right)$$

$$\begin{aligned} \delta_{22} &= T - 2\text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}_2' \mathbf{Z}_1 \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \\ &+ \text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \mathbf{X}' \mathbf{Z}_1 \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \end{aligned}$$

$$\begin{aligned} \delta_{23} &= T - 2\text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \\ &+ \text{tr} \left(\mathbf{X}' \mathbf{Z}_2 \Delta_T^{-1} \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \mathbf{X}' \mathbf{Z}_2 \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \end{aligned}$$

$$\delta_{31} = N - \text{tr} \left(\mathbf{X}' \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right)$$

$$\begin{aligned} \delta_{32} &= M - 2\text{tr} \left(\mathbf{X}' \mathbf{Z}_1 \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \\ &+ \text{tr} \left(\mathbf{X}' \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \mathbf{X}' \mathbf{Z}_1 \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \end{aligned}$$

$$\begin{aligned} \delta_{33} &= N - 2\text{tr} \left(\mathbf{X}' \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}_1' \mathbf{Z}_2 \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \\ &+ \text{tr} \left(\mathbf{X}' \mathbf{Z}_1 \Delta_N^{-1} \mathbf{Z}_1' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \mathbf{X}' \mathbf{Z}_2 \mathbf{Z}_2' \mathbf{X} (\mathbf{X}' \mathbf{X})^{-1} \right) \end{aligned}$$

The PANEL procedure solves this system for the estimates $\hat{\sigma}_\epsilon$, $\hat{\sigma}_v$, and $\hat{\sigma}_e$. Some of the estimated variance components can be negative. Negative components are set to zero and estimation proceeds.

Nerlove's Method

The Nerlove method for estimating variance components can be obtained with by setting VCOMP = NL.

The estimator of the error variance is

$$\hat{\sigma}_\epsilon^2 = \tilde{\mathbf{u}}' \mathbf{P} \tilde{\mathbf{u}} / M$$

The variance components for cross section and time effects are:

$$\hat{\sigma}_v^2 = \sum_{i=1}^N \frac{(\gamma_i - \bar{\gamma})^2}{N-1} \text{ where } \gamma_i \text{ is the } i\text{th cross section effect}$$

and

$$\hat{\sigma}_e^2 = \sum_{i=1}^T \frac{(\alpha_i - \bar{\alpha})^2}{T-1} \text{ where } \alpha_i \text{ is the } i\text{th time effect}$$

With the estimates of the variance components in hand, you can proceed to the final estimation. If the panel is balanced, partial mean deviations are used:

$$\tilde{y}_{it} = y_{it} - \theta_1 \bar{y}_{i\cdot} - \theta_2 \bar{y}_{\cdot t} + \theta_3 \bar{y}_{\cdot\cdot}$$

$$\tilde{x}_{it} = x_{it} - \theta_1 \bar{x}_{i\cdot} - \theta_2 \bar{x}_{\cdot t} + \theta_3 \bar{x}_{\cdot\cdot}$$

The θ estimates are obtained from

$$\theta_1 = 1 - \frac{\sigma_\epsilon}{\sqrt{T\sigma_v^2 + \sigma_\epsilon^2}}$$

$$\theta_2 = 1 - \frac{\sigma_\epsilon}{\sqrt{N\sigma_e^2 + \sigma_\epsilon^2}}$$

$$\theta_3 = \theta_1 + \theta_2 + \frac{\sigma_\epsilon}{\sqrt{T\sigma_v^2 + N\sigma_e^2 + \sigma_\epsilon^2}} - 1;$$

With these partial deviations, PROC PANEL uses OLS on the transformed series (including an intercept if so desired).

The case of an unbalanced panel is somewhat trickier. You could naively substitute the variance components in the equation below:

$$\Omega = \sigma_\epsilon^2 \mathbf{I}_M + \sigma_v^2 \mathbf{Z}_1 \mathbf{Z}_1' + \sigma_e^2 \mathbf{Z}_2 \mathbf{Z}_2'$$

After inverting the expression for Ω , it is possible to do GLS on the data (even if the panel is unbalanced). However, the inversion of Ω is no small matter because the dimension is at least $\frac{M(M+1)}{2}$.

Wansbeek and Kapteyn show that the inverse of Ω can be written as

$$\sigma_\epsilon^2 \Omega^{-1} = \mathbf{V} - \mathbf{V} \mathbf{Z}_2 \tilde{\mathbf{P}}^{-1} \mathbf{Z}_2' \mathbf{V}$$

with the following:

$$\begin{aligned} \mathbf{V} &= \mathbf{I}_M - \mathbf{Z}_1 \tilde{\Delta}_N^{-1} \mathbf{Z}_1' \\ \tilde{\mathbf{P}} &= \tilde{\Delta}_T - \mathbf{A} \tilde{\Delta}_N^{-1} \mathbf{A}' \\ \tilde{\Delta}_N &= \Delta_N + \left(\frac{\sigma_\epsilon^2}{\sigma_v^2} \right) \mathbf{I}_N \\ \tilde{\Delta}_T &= \Delta_T + \left(\frac{\sigma_\epsilon^2}{\sigma_e^2} \right) \mathbf{I}_T \end{aligned}$$

Computationally, this is a much less intensive approach.

By using the inverse of the variance-covariance matrix of the error, it becomes possible to complete GLS on the unbalanced panel.

Parks Method (Autoregressive Model)

Parks (1967) considered the first-order autoregressive model in which the random errors u_{it} , $i = 1, 2, \dots, N$, and $t = 1, 2, \dots, T$ have the structure

$$\begin{aligned} E(u_{it}^2) &= \sigma_{ii}(\text{heteroscedasticity}) \\ E(u_{it}u_{jt}) &= \sigma_{ij}(\text{contemporaneously correlated}) \\ u_{it} &= \rho_i u_{i,t-1} + \epsilon_{it}(\text{autoregression}) \end{aligned}$$

where

$$\begin{aligned} E(\epsilon_{it}) &= 0 \\ E(u_{i,t-1}\epsilon_{jt}) &= 0 \\ E(\epsilon_{it}\epsilon_{jt}) &= \phi_{ij} \\ E(\epsilon_{it}\epsilon_{js}) &= 0(s \neq t) \\ E(u_{i0}) &= 0 \\ E(u_{i0}u_{j0}) &= \sigma_{ij} = \phi_{ij}/(1 - \rho_i\rho_j) \end{aligned}$$

The model assumed is first-order autoregressive with contemporaneous correlation between cross sections. In this model, the covariance matrix for the vector of random errors \mathbf{u} can be expressed as

$$E(\mathbf{u}\mathbf{u}') = \mathbf{V} = \begin{bmatrix} \sigma_{11}P_{11} & \sigma_{12}P_{12} & \dots & \sigma_{1N}P_{1N} \\ \sigma_{21}P_{21} & \sigma_{22}P_{22} & \dots & \sigma_{2N}P_{2N} \\ \vdots & \vdots & \ddots & \vdots \\ \sigma_{N1}P_{N1} & \sigma_{N2}P_{N2} & \dots & \sigma_{NN}P_{NN} \end{bmatrix}$$

where

$$P_{ij} = \begin{bmatrix} 1 & \rho_j & \rho_j^2 & \dots & \rho_j^{T-1} \\ \rho_i & 1 & \rho_j & \dots & \rho_j^{T-2} \\ \rho_i^2 & \rho_i & 1 & \dots & \rho_j^{T-3} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \rho_i^{T-1} & \rho_i^{T-2} & \rho_i^{T-3} & \dots & 1 \end{bmatrix}$$

The matrix \mathbf{V} is estimated by a two-stage procedure, and $\boldsymbol{\beta}$ is then estimated by generalized least squares. The first step in estimating \mathbf{V} involves the use of ordinary least squares to estimate $\boldsymbol{\beta}$ and obtain the fitted residuals, as follows:

$$\hat{\mathbf{u}} = \mathbf{y} - \mathbf{X}\hat{\boldsymbol{\beta}}_{OLS}$$

A consistent estimator of the first-order autoregressive parameter is then obtained in the usual manner, as follows:

$$\hat{\rho}_i = \left(\sum_{t=2}^T \hat{u}_{it} \hat{u}_{i,t-1} \right) / \left(\sum_{t=2}^T \hat{u}_{i,t-1}^2 \right) \quad i = 1, 2, \dots, N$$

Finally, the autoregressive characteristic of the data is removed (asymptotically) by the usual transformation of taking weighted differences. That is, for $i = 1, 2, \dots, N$,

$$y_{i1} \sqrt{1 - \hat{\rho}_i^2} = \sum_{k=1}^p X_{i1k} \beta_k \sqrt{1 - \hat{\rho}_i^2} + u_{i1} \sqrt{1 - \hat{\rho}_i^2}$$

$$y_{it} - \hat{\rho}_i y_{i,t-1} = \sum_{k=1}^p (X_{itk} - \hat{\rho}_i X_{i,t-1,k}) \beta_k + u_{it} - \hat{\rho}_i u_{i,t-1} \quad t = 2, \dots, T$$

which is written

$$y_{it}^* = \sum_{k=1}^p X_{itk}^* \beta_k + u_{it}^* \quad i = 1, 2, \dots, N; \quad t = 1, 2, \dots, T$$

Notice that the transformed model has not lost any observations (Seely and Zyskind 1971).

The second step in estimating the covariance matrix \mathbf{V} is applying ordinary least squares to the preceding transformed model, obtaining

$$\hat{\mathbf{u}}^* = \mathbf{y}^* - \mathbf{X}^* \hat{\boldsymbol{\beta}}_{OLS}^*$$

from which the consistent estimator of σ_{ij} is calculated as follows:

$$s_{ij} = \frac{\hat{\phi}_{ij}}{(1 - \hat{\rho}_i \hat{\rho}_j)}$$

where

$$\hat{\phi}_{ij} = \frac{1}{(T - p)} \sum_{t=1}^T \hat{u}_{it}^* \hat{u}_{jt}^*$$

Estimated generalized least squares (EGLS) then proceeds in the usual manner,

$$\hat{\boldsymbol{\beta}}_P = (\mathbf{X}' \hat{\mathbf{V}}^{-1} \mathbf{X})^{-1} \mathbf{X}' \hat{\mathbf{V}}^{-1} \mathbf{y}$$

where $\hat{\mathbf{V}}$ is the derived consistent estimator of \mathbf{V} . For computational purposes, $\hat{\boldsymbol{\beta}}_P$ is obtained directly from the transformed model,

$$\hat{\boldsymbol{\beta}}_P = (\mathbf{X}^{*'} (\hat{\Phi}^{-1} \otimes I_T) \mathbf{X}^*)^{-1} \mathbf{X}^{*'} (\hat{\Phi}^{-1} \otimes I_T) \mathbf{y}^*$$

where $\hat{\Phi} = [\hat{\phi}_{ij}]_{i,j=1,\dots,N}$.

The preceding procedure is equivalent to Zellner's two-stage methodology applied to the transformed model (Zellner 1962).

Parks demonstrates that this estimator is consistent and asymptotically, normally distributed with

$$\text{Var}(\hat{\boldsymbol{\beta}}_P) = (\mathbf{X}' \mathbf{V}^{-1} \mathbf{X})^{-1}$$

Standard Corrections

For the PARKS option, the first-order autocorrelation coefficient must be estimated for each cross section. Let ρ be the $N \times 1$ vector of true parameters and $R = (r_1, \dots, r_N)'$ be the corresponding vector of estimates. Then, to ensure that only range-preserving estimates are used in PROC PANEL, the following modification for R is made:

$$r_i = \begin{cases} r_i & \text{if } |r_i| < 1 \\ \max(.95, r_{\max}) & \text{if } r_i \geq 1 \\ \min(-.95, r_{\min}) & \text{if } r_i \leq -1 \end{cases}$$

where

$$r_{\max} = \begin{cases} 0 & \text{if } r_i < 0 \text{ or } r_i \geq 1 \quad \forall i \\ \max_j [r_j : 0 \leq r_j < 1] & \text{otherwise} \end{cases}$$

and

$$r_{\min} = \begin{cases} 0 & \text{if } r_i > 0 \text{ or } r_i \leq -1 \quad \forall i \\ \max_j [r_j : -1 < r_j \leq 0] & \text{otherwise} \end{cases}$$

Whenever this correction is made, a warning message is printed.

Da Silva Method (Variance-Component Moving Average Model)

The Da Silva method assumes that the observed value of the dependent variable at the t th time point on the i th cross-sectional unit can be expressed as

$$y_{it} = \mathbf{x}_{it}'\beta + a_i + b_t + e_{it} \quad i = 1, \dots, N; t = 1, \dots, T$$

where

$\mathbf{x}_{it}' = (x_{it1}, \dots, x_{itp})$ is a vector of explanatory variables for the t th time point and i th cross-sectional unit

$\beta = (\beta_1, \dots, \beta_p)'$ is the vector of parameters

a_i is a time-invariant, cross-sectional unit effect

b_t is a cross-sectionally invariant time effect

e_{it} is a residual effect unaccounted for by the explanatory variables and the specific time and cross-sectional unit effects

Since the observations are arranged first by cross sections, then by time periods within cross sections, these equations can be written in matrix notation as

$$\mathbf{y} = \mathbf{X}\beta + \mathbf{u}$$

where

$$\begin{aligned}\mathbf{u} &= (\mathbf{a} \otimes \mathbf{1}_T) + (\mathbf{1}_N \otimes \mathbf{b}) + \mathbf{e} \\ \mathbf{y} &= (y_{11}, \dots, y_{1T}, y_{21}, \dots, y_{NT})' \\ \mathbf{X} &= (\mathbf{x}_{11}, \dots, \mathbf{x}_{1T}, \mathbf{x}_{21}, \dots, \mathbf{x}_{NT})' \\ \mathbf{a} &= (a_1 \dots a_N)' \\ \mathbf{b} &= (b_1 \dots b_T)' \\ \mathbf{e} &= (e_{11}, \dots, e_{1T}, e_{21}, \dots, e_{NT})'\end{aligned}$$

Here $\mathbf{1}_N$ is an $N \times 1$ vector with all elements equal to 1, and \otimes denotes the Kronecker product.

The following conditions are assumed:

1. \mathbf{x}_{it} is a sequence of nonstochastic, known $p \times 1$ vectors in \Re^p whose elements are uniformly bounded in \Re^p . The matrix \mathbf{X} has a full column rank p .
2. $\boldsymbol{\beta}$ is a $p \times 1$ constant vector of unknown parameters.
3. \mathbf{a} is a vector of uncorrelated random variables such that $E(a_i) = 0$ and $\text{var}(a_i) = \sigma_a^2$, $\sigma_a^2 > 0, i = 1, \dots, N$.
4. \mathbf{b} is a vector of uncorrelated random variables such that $E(b_t) = 0$ and $\text{var}(b_t) = \sigma_b^2$ where $\sigma_b^2 > 0$ and $t = 1, \dots, T$.
5. $\mathbf{e}_i = (e_{i1}, \dots, e_{iT})'$ is a sample of a realization of a finite moving-average time series of order $m < T - 1$ for each i ; hence,

$$e_{it} = \alpha_0 \epsilon_t + \alpha_1 \epsilon_{t-1} + \dots + \alpha_m \epsilon_{t-m} \quad t = 1, \dots, T; i = 1, \dots, N$$

where $\alpha_0, \alpha_1, \dots, \alpha_m$ are unknown constants such that $\alpha_0 \neq 0$ and $\alpha_m \neq 0$, and $\{\epsilon_j\}_{j=-\infty}^{j=\infty}$ is a white noise process—that is, a sequence of uncorrelated random variables with $E(\epsilon_t) = 0$, $E(\epsilon_t^2) = \sigma_\epsilon^2$, and $\sigma_\epsilon^2 > 0$.

6. The sets of random variables $\{a_i\}_{i=1}^N$, $\{b_t\}_{t=1}^T$, and $\{e_{it}\}_{t=1}^T$ for $i = 1, \dots, N$ are mutually uncorrelated.
7. The random terms have normal distributions $a_i \sim N(0, \sigma_a^2)$, $b_t \sim N(0, \sigma_b^2)$, and $\epsilon_{t-k} \sim N(0, \sigma_\epsilon^2)$, for $i = 1, \dots, N$; $t = 1, \dots, T$; and $k = 1, \dots, m$.

If assumptions 1–6 are satisfied, then

$$E(\mathbf{y}) = \mathbf{X}\boldsymbol{\beta}$$

and

$$\text{var}(\mathbf{y}) = \sigma_a^2(I_N \otimes J_T) + \sigma_b^2(J_N \otimes I_T) + (I_N \otimes \Psi_T)$$

where Ψ_T is a $T \times T$ matrix with elements ψ_{ts} as follows:

$$\text{Cov}(e_{it}e_{is}) = \begin{cases} \psi(|t-s|) & \text{if } |t-s| \leq m \\ 0 & \text{if } |t-s| > m \end{cases}$$

where $\psi(k) = \sigma_\epsilon^2 \sum_{j=0}^{m-k} \alpha_j \alpha_{j+k}$ for $k = |t-s|$. For the definition of I_N , I_T , J_N , and J_T , see the section “[Fuller and Battese’s Method](#)” on page 1368.

The covariance matrix, denoted by \mathbf{V} , can be written in the form

$$\mathbf{V} = \sigma_a^2(I_N \otimes J_T) + \sigma_b^2(J_N \otimes I_T) + \sum_{k=0}^m \psi(k)(I_N \otimes \Psi_T^{(k)})$$

where $\Psi_T^{(0)} = I_T$, and, for $k=1, \dots, m$, $\Psi_T^{(k)}$ is a band matrix whose k th off-diagonal elements are 1’s and all other elements are 0’s.

Thus, the covariance matrix of the vector of observations \mathbf{y} has the form

$$\text{Var}(\mathbf{y}) = \sum_{k=1}^{m+3} v_k V_k$$

where

$$\begin{aligned} v_1 &= \sigma_a^2 \\ v_2 &= \sigma_b^2 \\ v_k &= \psi(k-3) \quad k = 3, \dots, m+3 \\ V_1 &= I_N \otimes J_T \\ V_2 &= J_N \otimes I_T \\ V_k &= I_N \otimes \Psi_T^{(k-3)} \quad k = 3, \dots, m+3 \end{aligned}$$

The estimator of β is a two-step GLS-type estimator—that is, GLS with the unknown covariance matrix replaced by a suitable estimator of \mathbf{V} . It is obtained by substituting Seely estimates for the scalar multiples v_k , $k = 1, 2, \dots, m+3$.

Seely (1969) presents a general theory of unbiased estimation when the choice of estimators is restricted to finite dimensional vector spaces, with a special emphasis on quadratic estimation of functions of the form $\sum_{i=1}^n \delta_i v_i$.

The parameters v_i ($i = 1, \dots, n$) are associated with a linear model $E(\mathbf{y}) = \mathbf{X}\beta$ with covariance matrix $\sum_{i=1}^n v_i V_i$ where V_i ($i = 1, \dots, n$) are real symmetric matrices. The method is also discussed by Seely (1970a, 1970b) and Seely and Zyskind (1971). Seely and Soong (1971) consider the MINQUE principle, using an approach along the lines of Seely (1969).

Dynamic Panel Estimator

For an example on dynamic panel estimation using GMM option, see “[Example 20.6: The Cigarette Sales Data: Dynamic Panel Estimation with GMM](#)” on page 1418.

Consider the case of the following general model:

$$y_{it} = \sum_{l=1}^{maxlag} \phi_l y_{i(t-l)} + \sum_{k=1}^K \beta_k x_{itk} + \gamma_i + \alpha_t + \epsilon_{it}$$

The x variables can include ones that are correlated or uncorrelated to the individual effects, predetermined, or strictly exogenous. The γ and α are cross-sectional and time series fixed effects, respectively. Arellano and Bond (1991) show that it is possible to define conditions that should result in a consistent estimator.

Consider the simple case of an autoregression in a panel setting (with only individual effects):

$$y_{it} = \phi y_{i(t-1)} + \gamma_i + \epsilon_{it}$$

Differencing the preceding relationship results in:

$$\Delta y_{it} = \phi \Delta y_{i(t-1)} + v_{it}$$

where $v_{it} = \epsilon_{it} - \epsilon_{it-1}$.

Obviously, y is not exogenous. However, Arellano and Bond (1991) show that it is still useful as an instrument, if properly lagged.

For $t = 2$ (assuming the first observation corresponds to time period 1) you have,

$$\Delta y_{i2} = \phi \Delta y_{i1} + v_{i2}$$

Using y_{i1} as an instrument is not a good idea since $\text{Cov}(\epsilon_{i1}, v_{i2}) \neq 0$. Therefore, since it is not possible to form a moment restriction, you discard this observation.

For $t = 3$ you have,

$$\Delta y_{i3} = \phi \Delta y_{i2} + v_{i3}$$

Clearly, you have every reason to suspect that $\text{Cov}(\epsilon_{i1}, v_{i3}) = 0$. This condition forms one restriction.

For $t = 4$, both $\text{Cov}(\epsilon_{i1}, v_{i4}) = 0$ and $\text{Cov}(\epsilon_{i2}, v_{i4}) = 0$ must hold.

Proceeding in that fashion, you have the following matrix of instruments,

$$\mathbf{Z}_i = \begin{pmatrix} y_{i1} & 0 & 0 & \cdots & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & y_{i1} & y_{i2} & 0 & \cdots & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & y_{i1} & y_{i2} & y_{i3} & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & & & & \vdots & & \vdots & \vdots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & y_{i1} & \cdots & y_{i(T-2)} \end{pmatrix}$$

Using the instrument matrix, you form the weighting matrix \mathbf{A}_N as

$$\mathbf{A}_N = \left(\frac{1}{N} \sum_i^N \mathbf{Z}_i' \mathbf{H}_i \mathbf{Z}_i \right)^{-1}$$

The initial weighting matrix is

$$\mathbf{H}_i = \begin{pmatrix} 2 & -1 & 0 & \cdots & 0 & 0 & 0 & 0 & 0 & 0 \\ -1 & 2 & -1 & 0 & \cdots & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 2 & -1 & 0 & \cdots & 0 & 0 & 0 & 0 \\ \vdots & \vdots & \vdots & & & & \vdots & & \vdots & \vdots \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 & 2 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 & 2 \end{pmatrix}$$

Note that the maximum size of the \mathbf{H}_i matrix is $T-2$. The origins of the initial weighting matrix are the expected error covariances. Notice that on the diagonals,

$$E(v_{it}v_{it}) = E(\epsilon_{it}^2 - 2\epsilon_{it}\epsilon_{i(t-1)} + \epsilon_{i(t-1)}^2) = 2\sigma_\epsilon^2$$

and off diagonals,

$$E(v_{it}v_{i(t-1)}) = E(\epsilon_{it}\epsilon_{i(t-1)} - \epsilon_{it}\epsilon_{i(t-2)} - \epsilon_{i(t-1)}\epsilon_{i(t-1)} + \epsilon_{i(t-1)}\epsilon_{i(t-2)}) = -\sigma_\epsilon^2$$

If you let the vector of lagged differences (in the series y_{it}) be denoted as Δy_{i-} and the dependent variable as Δy_i , then the optimal GMM estimator is

$$\phi = \left[\left(\sum_i \Delta y_{i-}' \mathbf{Z}_i \right) A_N \left(\sum_i \mathbf{Z}_i' \Delta y_{i-} \right) \right]^{-1} \left(\sum_i \Delta y_{i-}' \mathbf{Z}_i \right) A_N \left(\sum_i \mathbf{Z}_i' \Delta y_i \right)$$

Using the estimate, $\hat{\phi}$, you can obtain estimates of the errors, $\hat{\epsilon}$, or the differences, \hat{v} . From the errors, the variance is calculated as,

$$\sigma^2 = \frac{\hat{\epsilon}'\hat{\epsilon}}{M-1}$$

where $M = \sum_{i=1}^N T_i$ is the total number of observations.

Furthermore, you can calculate the variance of the parameter as,

$$\sigma^2 \left[\left(\sum_i \Delta y_{i-}' \mathbf{Z}_i \right) A_N \left(\sum_i \mathbf{Z}_i' \Delta y_{i-} \right) \right]^{-1}$$

Alternatively, you can view the initial estimate of the ϕ as a first step. That is, by using $\hat{\phi}$, you can improve the estimate of the weight matrix, A_N .

Instead of imposing the structure of the weighting, you form the \mathbf{H}_i matrix through the following:

$$\mathbf{H}_i = \hat{v}_i \hat{v}_i'$$

You then complete the calculation as previously shown. The PROC PANEL option TWOSTEP specifies this estimation.

The case of multiple right-hand-side variables illustrates more clearly the power of Arellano and Bond (1991) and Arellano and Bover (1995).

Considering the general case you have:

$$y_{it} = \sum_{l=1}^{maxlag} \phi_l y_{i(t-l)} + \mathbf{X}_i + \gamma_i + \alpha_t + \epsilon_{it}$$

It is clear that lags of the dependent variable are both not exogenous and correlated to the fixed effects. However, the independent variables can fall into one of several categories. An independent variable can be correlated and exogenous, uncorrelated and exogenous, correlated and predetermined, and uncorrelated and predetermined. The category in which an independent variable is found influences when or whether it becomes a suitable instrument. Note, however, that neither PROC PANEL nor Arellano and Bond require that a regressor be an instrument or that an instrument be a regressor.

First, consider the question of exogenous or endogenous. An exogenous variable is not correlated with the error term in the model at all. Therefore, all observations (on the exogenous variable) become valid instruments at all time periods. If the model has only one instrument and it happens to be exogenous, then the optimal instrument matrix looks like,

$$\mathbf{Z}_i = \begin{pmatrix} x_{i1} \cdots x_{iT} & 0 & 0 & 0 & 0 \\ 0 & x_{i1} \cdots x_{iT} & 0 & 0 & 0 \\ 0 & 0 & x_{i1} \cdots x_{iTS} & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & x_{i1} \cdots x_{iTS} \end{pmatrix}$$

The situation for the predetermined variables becomes a little more difficult. A predetermined variable is one whose future realizations can be correlated to current shocks in the dependent variable. With such an understanding, it is admissible to allow all current and lagged realizations as instruments. In other words you have,

$$\mathbf{Z}_i = \begin{pmatrix} x_{i1} & 0 & 0 & 0 & 0 \\ 0 & x_{i1}x_{i2} & 0 & 0 & 0 \\ 0 & 0 & x_{i1} \cdots x_{i3} & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & x_{i1} \cdots x_{i(TS-2)} \end{pmatrix}$$

When the data contain a mix of endogenous, exogenous, and predetermined variables, the instrument matrix is formed by combining the three. The third observation would have one observation on the dependent variable as an instrument, three observations on the predetermined variables as instruments, and all observations on the exogenous variables.

There is yet another set of moment restrictions that can be employed. An uncorrelated variable means that the variable's level is not affected by the individual specific effect. You write the general model presented above as:

$$y_{it} = \sum_{l=1}^{maxlag} \phi_l y_{i(t-l)} + \sum_{k=1}^K \beta_k x_{itk} + \alpha_t + \mu_{it}$$

where $\mu_{it} = \gamma_i + \epsilon_{it}$.

Since the variables are uncorrelated with γ and uncorrelated with the error, you can perform a system estimation with the difference and level equations. That is, the uncorrelated variables imply moment restrictions on the level equation. If you denote the new instrument matrix with the full complement of instruments available by a $*$ and both x^p and x^e are uncorrelated, then you have:

$$\mathbf{Z}_i^* = \begin{pmatrix} \mathbf{Z}_i & 0 & 0 & 0 & 0 \\ 0 & x_{i1}^p & x_{i1}^e & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & 0 & \cdots & x_{iTS}^p & x_{iTS}^e \end{pmatrix}$$

The formation of the initial weighting matrix becomes somewhat problematic. If you denote the new weighting matrix with a $*$, then you can write the following:

$$\mathbf{A}_N^* = \left(\frac{1}{N} \sum_i \mathbf{Z}_i^{*'} \mathbf{H}_i^* \mathbf{Z}_i^* \right)^{-1}$$

where

$$\mathbf{H}_i^* = \begin{pmatrix} \mathbf{H}_i & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & 1 \end{pmatrix}$$

To finish, you write out the two equations (or two stages) that are estimated.

$$\Delta y_{it} = \boldsymbol{\beta}^* \Delta \mathbf{S}_i + \alpha_t - \alpha_{t-1} + v_{it} \qquad y_{it} = \boldsymbol{\beta}^* \mathbf{S}_i + \gamma_i + \alpha_t + \epsilon_{it}$$

where \mathbf{S}_i is the matrix of all explanatory variables, lagged endogenous, exogenous, and predetermined.

Let \mathbf{y}_{it}^* be given by

$$\mathbf{y}_{it}^* = \begin{pmatrix} \Delta y_{it} \\ y_{it} \end{pmatrix} \quad \boldsymbol{\beta}^* = \begin{pmatrix} \boldsymbol{\phi} & \boldsymbol{\beta} \end{pmatrix} \quad \mathbf{S}_i^* = \begin{pmatrix} \Delta \mathbf{S}_i \\ \mathbf{S}_i \end{pmatrix}$$

Using the information above,

$$\boldsymbol{\beta}^* = \left[\left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) \mathbf{A}_N^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_i \right) \right]^{-1} \left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) \mathbf{A}_N^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{y}_i^* \right)$$

If the TWOSTEP or ITGMM option is not requested, estimation terminates here. If it terminates, you can obtain the following information.

Variance of the error term comes from the second stage equation—that is,

$$\sigma^2 = \frac{\hat{\epsilon}' \hat{\epsilon}}{M - p}$$

where p is the number of regressors.

The variance covariance matrix can be obtained from

$$\left[\left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_N^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_i^* \right) \right]^{-1} \sigma^2$$

Alternatively, a robust estimate of the variance covariance matrix can be obtained by specifying the ROBUST option. Without further reestimation of the model, the \mathbf{H}_i^* matrix is recalculated as follows:

$$\mathbf{H}_{i,2}^* = \begin{pmatrix} \mathbf{v}\mathbf{v}' & 0 \\ 0 & \boldsymbol{\epsilon}\boldsymbol{\epsilon}' \end{pmatrix}$$

And the weighting matrix becomes

$$A_{N,2}^* = \left(\frac{1}{N} \sum_i \mathbf{Z}_i^{*'} \mathbf{H}_{i,2}^* \mathbf{Z}_i^* \right)^{-1}$$

Using the information above, you construct the robust variance covariance matrix from the following:

Let \mathbf{G} denote a temporary matrix.

$$\mathbf{G} = \left[\left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_N^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_{*i} \right) \right]^{-1} \left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_N^*$$

The robust variance covariance estimate of $\boldsymbol{\beta}^*$ is:

$$\mathbf{V}^{robust}(\boldsymbol{\beta}^*) = \mathbf{G} A_{N,2}^{*-1} \mathbf{G}'$$

Alternatively, the new weighting matrix can be used to form an updated estimate of the regression parameters. This results when the TWOSTEP option is requested. In short,

$$\boldsymbol{\beta}^* = \left[\left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_{N,2}^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_i^* \right) \right]^{-1} \left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_{N,2}^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_i^* \right)$$

The variance covariance estimate of the two step $\boldsymbol{\beta}^*$ becomes

$$\mathbf{V}(\boldsymbol{\beta}^*) = \left[\left(\sum_i \mathbf{S}_i^{*'} \mathbf{Z}_i^* \right) A_{N,2}^* \left(\sum_i \mathbf{Z}_i^{*'} \mathbf{S}_i^* \right) \right]^{-1}$$

As a final note, it is possible to iterate more than twice by specifying the ITGMM option. Such a multiple iteration should result in a more stable estimate of the variance covariance estimate. PROC PANEL allows two convergence criteria. Convergence can occur in the parameter estimates or in the weighting matrices. Iterate until

$$\max_{i,j \leq \dim(A_{N,k})} \frac{|A_{N,k+1}^*(i,j) - A_{N,k}^*(i,j)|}{|A_{N,k}^*(i,j)|} \leq \text{ATOL}$$

or

$$\max_{i \leq \dim(\beta_k^*)} \frac{|\beta_{k+1}^*(i) - \beta_k^*(i)|}{|\beta_k^*(i)|} \leq \text{BTOL}$$

where ATOL is the tolerance for convergence in the weighting matrix and BTOL is the tolerance for convergence in the parameter estimate matrix. The default convergence criteria is $\text{BTOL} = 1\text{E-}8$ for PROC PANEL.

Specification Testing For Dynamic Panel

Specification tests under the GMM in PROC PANEL follow Arellano and Bond (1991) very generally. The first test available is a Sargan/Hansen test of over-identification. The test for a one-step estimation is constructed as

$$\left(\sum_i \eta_i' \mathbf{Z}_i^* \right) A_N^* \left(\sum_i \mathbf{Z}_i^{*'} \eta_i \right) \sigma^2$$

where η_i is the stacked error term (of the differenced equation and level equation).

When the robust weighting matrix is used, the test statistic is computed as

$$\left(\sum_i \eta_i' \mathbf{Z}_i^* \right) A_{N,2}^* \left(\sum_i \mathbf{Z}_i^{*'} \eta_i \right)$$

This definition of the Sargan test is used for all iterated estimations. The Sargan test is distributed as a χ^2 with degrees of freedom equal to the number of moment conditions minus the number of parameters.

In addition to the Sargan test, PROC PANEL tests for autocorrelation in the residuals. These tests are distributed as standard normal. PROC PANEL tests the hypothesis that the autocorrelation of the l th lag is significant.

Define ω_l as the lag of the differenced error, with zero padding for the missing values generated. Symbolically,

$$\omega_l = \begin{pmatrix} 0 \\ \vdots \\ 0 \\ v_1 \\ \vdots \\ v_{TS-2-l} \end{pmatrix}$$

You define the constant k_0 as

$$k_0(l) = \sum_i \omega_{l,i}' v_i$$

You next define the constant k_1 as

$$k_1(l) = \sum_i \omega_{l,i}' \mathbf{H}_i \omega_{l,i}$$

Note that the choice of \mathbf{H}_i is dependent on the stage of estimation. If the estimation is first stage, then you would use the matrix with twos along the main diagonal, and minus ones along the primary subdiagonals. In a robust estimation or multi-step estimation, this matrix would be formed from the outer product of the residuals (from the previous step).

Define the constant k_2 as

$$k_2(l) = -2 \left(\sum_i \omega'_{l,i} \Delta \mathbf{S}_i \right) \mathbf{G} \left(\sum_i \Delta \mathbf{S}'_i \mathbf{Z}_i \right) A_{N,k} \left(\sum_i \mathbf{Z}'_i \mathbf{H}_i \omega_{l,i} \right)$$

The matrix \mathbf{G} is defined as

$$\mathbf{G} = \left[\left(\sum_i \Delta \mathbf{S}^{*'}_i \mathbf{Z}^*_i \right) A^*_{N,k} \left(\sum_i \mathbf{Z}^{*'}_i \Delta \mathbf{S}^*_i \right) \right]^{-1}$$

The constant k_3 is defined as

$$k_3(l) = \left(\sum_i \omega'_{l,i} \Delta \mathbf{S}_i \right) V(\beta^*) \left(\sum_i \Delta \mathbf{S}'_i \omega_{l,i} \right)$$

Using the four quantities, the test for autoregressive structure in the differenced residual is

$$m(l) = \frac{k_0(l)}{\sqrt{k_1(l) + k_2(l) + k_3(l)}}$$

The m statistic is distributed as a normal random variable with mean zero and standard deviation of one.

Instrument Choice

Arellano and Bond's technique is a very useful method for dealing with any autoregressive characteristics in the data. However, there is one caveat to consider. Too many instruments bias the estimator to the within estimate. Furthermore, many instruments make this technique not scalable. The weighting matrix becomes very large, so every operation that involves it becomes more computationally intensive. The PANEL procedure enables you to specify a bandwidth for instrument selection. For example, specifying MAXBAND=10 means that at most there will be ten time observations for each variable that enters as an instrument. The default is to follow the Arellano-Bond methodology.

In specifying a maximum bandwidth, you can also specify the selection of the time observations. There are three possibilities: leading, trailing (default), and centered. The exact consequence of choosing any of those possibilities depends on the variable type (correlated, exogenous, or predetermined) and the time period of the current observation.

If the MAXBAND option is specified, then the following is true under any selection criterion (let t be the time subscript for the current observation). The first observation for the endogenous variable (as instrument) is $\max(t - \text{MAXBAND}, 1)$ and the last instrument is $t - 2$. The first observation for a predetermined variable is $\max(t - \text{MAXBAND}, 1)$ and the last is $t - 1$. The first and last observation for an exogenous variable is given in the following list:

- *Trailing*: If $t < \text{MAXBAND}$, then the first instrument is for the first time period and the last observation is MAXBAND. Otherwise, if $t \geq \text{MAXBAND}$, then the first observation is $t - \text{MAXBAND} + 1$

and the last instrument to enter is t .

- *Centered*: If $t \leq \frac{\text{MAXBAND}}{2}$, then the first observation is the first time period and the last observation is MAXBAND. If $t > T - \frac{\text{MAXBAND}}{2}$, then the first instrument included is $T - \text{MAXBAND} + 1$ and the last observation is T . If $\frac{\text{MAXBAND}}{2} < t \leq T - \frac{\text{MAXBAND}}{2}$, then the first included instrument is $t - \frac{\text{MAXBAND}}{2} + 1$ and the last observation is $t + \frac{\text{MAXBAND}}{2}$. If the MAXBAND value is an odd number, the procedure decrements by one.
- *Leading* : If $t > T - \text{MAXBAND}$, then the first instrument corresponds to time period $T - \text{MAXBAND} + 1$ and the last observation is T . Otherwise, if $t \leq T - \text{MAXBAND}$, then the first observation is t and the last observation is $t + \text{MAXBAND} + 1$.

The PANEL procedure enables you to include dummy variables to deal with the presence of time effects that are not captured by including the lagged dependent variable. The dummy variables directly affect the level equations. However, this implies that the difference of the dummy variable for time period t and $t - 1$ enters the difference equation. The first usable observation occurs at $t = 3$. If the level equation is not used in the estimation, then there is no way to identify the dummy variables. Selecting the TIME option gives the same result as that which would be obtained by creating dummy variables in the data set and using those in the regression.

The PANEL procedure gives you several options when it comes to missing values and unbalanced panel. By default, any time period for which there are missing values is skipped. The corresponding rows and columns of **H** matrices are zeroed, and the calculation is continued. Alternatively, you can elect to replace missing values and missing observations with zeros (ZERO), the overall mean of the series (OAM), the cross-sectional mean (CSM), or the time series mean (TSM).

Linear Hypothesis Testing

For a linear hypothesis of the form $\mathbf{R}\beta = \mathbf{r}$ where \mathbf{R} is $J \times K$ and \mathbf{r} is $J \times 1$, the F -statistic with $J, M - K$ degrees of freedom is computed as

$$(\mathbf{R}\hat{\beta} - \mathbf{r})' [\mathbf{R}\hat{\mathbf{V}}\mathbf{R}']^{-1} (\mathbf{R}\hat{\beta} - \mathbf{r})$$

However, it is also possible to write the F statistic as

$$F = \frac{(\hat{\mathbf{u}}_*' \hat{\mathbf{u}}_* - \hat{\mathbf{u}}' \hat{\mathbf{u}}) / J}{\hat{\mathbf{u}}' \hat{\mathbf{u}} / (M - K)}$$

where

- $\hat{\mathbf{u}}_*$ is the residual vector from the restricted regression
- $\hat{\mathbf{u}}$ is the residual vector from the unrestricted regression
- J is the number of restrictions

- $(M - K)$ are the degrees of freedom, M is the number of observations, and K is the number of parameters in the model

The Wald, likelihood ratio (LR) and Lagrange multiplier (LM) tests are all related to the F test. You use this relationship of the F test to the likelihood ratio and Lagrange multiplier tests. The Wald test is calculated from its definition.

The Wald test statistic is:

$$W = (\mathbf{R}\beta - \mathbf{r})' [\mathbf{R}\hat{\mathbf{V}}\mathbf{R}]^{-1} (\mathbf{R}\beta - \mathbf{r})$$

The advantage of calculating Wald in this manner is that it enables you to substitute a heteroscedasticity-corrected covariance matrix for the matrix \mathbf{V} . PROC PANEL makes such a substitution if you request the HCCME option in the MODEL statement.

The likelihood ratio is:

$$LR = M \ln \left[1 + \frac{1}{M - K} JF \right]$$

The Lagrange multiplier test statistic is:

$$LM = M \left[\frac{JF}{M - K + JF} \right]$$

where JF represents the number of restrictions multiplied by the result of the F test.

Note that only the Wald is changed when the HCCME option is selected. The LR and LM tests are unchanged.

The distribution of these test statistics is the χ^2 with degrees of freedom equal to the number of restrictions imposed (J). The three tests are asymptotically equivalent, but they have differing small sample properties. Greene (2000, p. 392) and Davidson and MacKinnon (1993, pg. 456-458) discuss the small sample properties of these statistics.

Heteroscedasticity-Corrected Covariance Matrices

The HCCME= option in the MODEL statement selects the type of heteroscedasticity-consistent covariance matrix. In the presence of heteroscedasticity, the covariance matrix has a complicated structure which can result in inefficiencies in the OLS estimates and biased estimates of the variance covariance matrix. Consider the simple linear model:

$$\mathbf{y} = \mathbf{X}\beta + \epsilon$$

This discussion parallels the discussion in Davidson and MacKinnon, 1993, pg. 548–562. The assumptions that make the linear regression best linear unbiased estimator (BLUE) are $E(\epsilon) = 0$ and $E(\epsilon\epsilon') = \Omega$, where Ω has the simple structure $\sigma^2\mathbf{I}$. Heteroscedasticity results in a general covariance structure, so that it is not possible to simplify Ω . The result is the following:

$$\tilde{\beta} = (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\mathbf{y} = (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'(\mathbf{X}\beta + \epsilon) = \beta + (\mathbf{X}'\mathbf{X})^{-1}\mathbf{X}'\epsilon$$

As long as the following is true, then you are assured that the OLS estimate is consistent and unbiased:

$$\text{plim}_{n \rightarrow \infty} \left(\frac{1}{n} \mathbf{X}' \boldsymbol{\epsilon} \right) = 0$$

If the regressors are nonrandom, then it is possible to write the variance of the estimated $\boldsymbol{\beta}$ as the following:

$$\text{Var}(\boldsymbol{\beta} - \tilde{\boldsymbol{\beta}}) = (\mathbf{X}'\mathbf{X})^{-1} \mathbf{X}' \Omega \mathbf{X} (\mathbf{X}'\mathbf{X})^{-1}$$

The effect of structure in the variance-covariance matrix can be ameliorated by using generalized least squares (GLS), provided that Ω^{-1} can be calculated. Using Ω^{-1} , you premultiply both sides of the regression equation,

$$L^{-1}\mathbf{y} = L^{-1}\mathbf{X}_c + L^{-1}\boldsymbol{\epsilon}$$

where L denotes the Cholesky root of Ω . (that is, $\Omega = LL'$ with L lower triangular).

The resulting GLS $\boldsymbol{\beta}$ is

$$\hat{\boldsymbol{\beta}} = (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'\Omega^{-1}\mathbf{y}$$

Using the GLS $\boldsymbol{\beta}$, you can write

$$\begin{aligned} \hat{\boldsymbol{\beta}} &= (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'\Omega^{-1}\mathbf{y} \\ &= (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'(\Omega^{-1}\mathbf{X}_c + \Omega^{-1}\boldsymbol{\epsilon}) \\ &= \boldsymbol{\beta} + (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'\Omega^{-1}\boldsymbol{\epsilon} \end{aligned}$$

The resulting variance expression for the GLS estimator is

$$\begin{aligned} \text{Var}(\boldsymbol{\beta} - \hat{\boldsymbol{\beta}}) &= (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'\Omega^{-1}\boldsymbol{\epsilon}\boldsymbol{\epsilon}'\Omega^{-1}\mathbf{X}(\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \\ &= (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \mathbf{X}'\Omega^{-1}\Omega\Omega^{-1}\mathbf{X}(\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \\ &= (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1} \end{aligned}$$

The difference in variance between the OLS estimator and the GLS estimator can be written as

$$(\mathbf{X}'\mathbf{X})^{-1} \mathbf{X}' \Omega \mathbf{X} (\mathbf{X}'\mathbf{X})^{-1} - (\mathbf{X}'\Omega^{-1}\mathbf{X})^{-1}$$

By the Gauss-Markov theorem, the difference matrix must be positive definite under most circumstances (zero if OLS and GLS are the same, when the usual classical regression assumptions are met). Thus, OLS is not efficient under a general error structure. It is crucial to realize that OLS does not produce biased results. It would suffice if you had a method for estimating a consistent covariance matrix and you used the OLS $\boldsymbol{\beta}$. Estimation of the Ω matrix is certainly not simple. The matrix is square and has M^2 elements; unless some sort of structure is assumed, it becomes an impossible problem to solve. However, the heteroscedasticity can have quite a general structure. White (1980) shows that it is not necessary to have a consistent estimate of Ω . On the contrary, it suffices to calculate an estimate of the middle expression. That is, you need an estimate of:

$$\Lambda = \mathbf{X}'\Omega\mathbf{X}$$

This matrix, Λ , is easier to estimate because its dimension is K . PROC PANEL provides the following classical HCCME estimators for Λ :

The matrix is approximated by:

- HCCME=N0:

$$\sigma^2 \mathbf{X}'\mathbf{X}$$

This is the simple OLS estimator. If you do not specify the HCCME= option, PROC PANEL defaults to this estimator.

- HCCME=0:

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \hat{\epsilon}_{it}^2 \mathbf{x}_{it} \mathbf{x}_{it}'$$

where N is the number of cross sections and T_i is the number of observations in i th cross section. The \mathbf{x}_{it}' is from the t th observation in the i th cross section, constituting the $(\sum_{j=1}^{i-1} T_j + t)$ th row of the matrix \mathbf{X} . If the CLUSTER option is specified, one extra term is added to the preceding equation so that the estimator of matrix Λ is

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \hat{\epsilon}_{it}^2 \mathbf{x}_{it} \mathbf{x}_{it}' + 2 \sum_{i=1}^N \sum_{t=1}^{T_i} \sum_{s=1}^{t-1} \hat{\epsilon}_{it} \hat{\epsilon}_{is} \mathbf{x}_{it} \mathbf{x}_{is}'$$

- HCCME=1:

$$\frac{M}{M-K} \sum_{i=1}^N \sum_{t=1}^{T_i} \hat{\epsilon}_{it}^2 \mathbf{x}_{it} \mathbf{x}_{it}'$$

where M is the total number of observations, $\sum_{j=1}^N T_j$, and K is the number of parameters. With the CLUSTER option, the estimator becomes

$$\frac{M}{M-K} \sum_{i=1}^N \sum_{t=1}^{T_i} \hat{\epsilon}_{it}^2 \mathbf{x}_{it} \mathbf{x}_{it}' + \frac{2M}{M-K} \sum_{i=1}^N \sum_{t=1}^{T_i} \sum_{s=1}^{t-1} \hat{\epsilon}_{it} \hat{\epsilon}_{is} \mathbf{x}_{it} \mathbf{x}_{is}'$$

- HCCME=2:

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \frac{\hat{\epsilon}_{it}^2}{1 - \hat{h}_{it}} \mathbf{x}_{it} \mathbf{x}_{it}'$$

The \hat{h}_{it} term is the $(\sum_{j=1}^{i-1} T_j + t)$ th diagonal element of the hat matrix. The expression for \hat{h}_{it} is $\mathbf{x}_{it}'(\mathbf{X}'\mathbf{X})^{-1}\mathbf{x}_{it}$. The hat matrix attempts to adjust the estimates for the presence of influence or leverage points. With the CLUSTER option, the estimator becomes

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \frac{\hat{\epsilon}_{it}^2}{1 - \hat{h}_{it}} \mathbf{x}_{it} \mathbf{x}_{it}' + 2 \sum_{i=1}^N \sum_{t=1}^{T_i} \sum_{s=1}^{t-1} \frac{\hat{\epsilon}_{it}}{\sqrt{1 - \hat{h}_{it}}} \frac{\hat{\epsilon}_{is}}{\sqrt{1 - \hat{h}_{is}}} \mathbf{x}_{it} \mathbf{x}_{is}'$$

- HCCME=3:

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \frac{\hat{\epsilon}_{it}^2}{(1 - \hat{h}_{it})^2} \mathbf{x}_{it} \mathbf{x}_{it}'$$

With the CLUSTER option, the estimator becomes

$$\sum_{i=1}^N \sum_{t=1}^{T_i} \frac{\hat{\epsilon}_{it}^2}{(1 - \hat{h}_{it})^2} \mathbf{x}_{it} \mathbf{x}_{it}' + 2 \sum_{i=1}^N \sum_{t=1}^{T_i} \sum_{s=1}^{t-1} \frac{\hat{\epsilon}_{it}}{1 - \hat{h}_{it}} \frac{\hat{\epsilon}_{is}}{1 - \hat{h}_{is}} \mathbf{x}_{it} \mathbf{x}_{is}'$$

- HCCME=4: PROC PANEL includes this option for the calculation of the Arellano (1987) version of the White (1980) HCCME in the panel setting. Arellano's insight is that there are N covariance matrices in a panel, and each matrix corresponds to a cross section. Forming the White HCCME for each panel, you need to take only the average of those N estimators that yield Arellano. The details of the estimation follow. First, you arrange the data such that the first cross section occupies the first T_i observations. You treat the panels as separate regressions with the form:

$$\mathbf{y}_i = \alpha_i \mathbf{i} + \mathbf{X}_{is} \tilde{\boldsymbol{\beta}} + \boldsymbol{\epsilon}_i$$

The parameter estimates $\tilde{\boldsymbol{\beta}}$ and α_i are the result of least squares dummy variables (LSDV) or within estimator regressions, and \mathbf{i} is a vector of ones of length T_i . The estimate of the i th cross section's $\mathbf{X}'\Omega\mathbf{X}$ matrix (where the s subscript indicates that no constant column has been suppressed to avoid confusion) is $\mathbf{X}'_i\Omega\mathbf{X}_i$. The estimate for the whole sample is:

$$\mathbf{X}'_s\Omega\mathbf{X}_s = \sum_{i=1}^N \mathbf{X}'_i\Omega\mathbf{X}_i$$

The Arellano standard error is in fact a White-Newey-West estimator with constant and equal weight on each component. In the between estimators, selecting HCCME=4 returns the HCCME=0 result since there is no 'other' variable to group by.

In their discussion, Davidson and MacKinnon (1993, pg. 554) argue that HCCME=1 should always be preferred to HCCME=0. Although HCCME=3 is generally preferred to 2 and 2 is preferred to 1, the calculation of HCCME=1 is as simple as the calculation of HCCME=0. Therefore, it is clear that HCCME=1 is preferred when the calculation of the hat matrix is too tedious.

All HCCME estimators have well-defined asymptotic properties. The small sample properties are not well-known, and care must be exercised when sample sizes are small.

The HCCME estimator of $\text{Var}(\boldsymbol{\beta})$ is used to drive the covariance matrices for the fixed effects and the Lagrange multiplier standard errors. Robust estimates of the variance-covariance matrix for $\boldsymbol{\beta}$ imply robust variance-covariance matrices for all other parameters.

R Square

The conventional R-square measure is inappropriate for all models that the PANEL procedure estimates by using GLS because a number outside the $[0,1]$ range might be produced. Hence, a generalization of the R square measure is reported. The following goodness-of-fit measure (Buse 1973) is reported:

$$R^2 = 1 - \frac{\hat{\mathbf{u}}' \hat{\mathbf{V}}^{-1} \hat{\mathbf{u}}}{\mathbf{y}' \mathbf{D}' \hat{\mathbf{V}}^{-1} \mathbf{D} \mathbf{y}}$$

where $\hat{\mathbf{u}}$ are the residuals of the transformed model, $\hat{\mathbf{u}} = \mathbf{y} - \mathbf{X}(\mathbf{X}' \hat{\mathbf{V}}^{-1} \mathbf{X})^{-1} \mathbf{X}' \hat{\mathbf{V}}^{-1} \mathbf{y}$,

and $\mathbf{D} = \mathbf{I}_M - \mathbf{j}_M \mathbf{j}_M' \left(\frac{\hat{\mathbf{V}}^{-1}}{\mathbf{j}_M' \hat{\mathbf{V}}^{-1} \mathbf{j}_M} \right)$.

This is a measure of the proportion of the transformed sum of squares of the dependent variable that is attributable to the influence of the independent variables.

If there is no intercept in the model, the corresponding measure (Theil 1961) is

$$R^2 = 1 - \frac{\hat{\mathbf{u}}' \hat{\mathbf{V}}^{-1} \hat{\mathbf{u}}}{\mathbf{y}' \hat{\mathbf{V}}^{-1} \mathbf{y}}$$

However, the fixed-effects models are somewhat different. In the case of a fixed-effects model, the choice of including or excluding an intercept becomes merely a choice of classification. Suppressing the intercept in the FIXONE or FIXONETIME case merely changes the name of the intercept to a fixed effect. It makes no sense to redefine the R-square measure since nothing material changes in the model. Similarly, for the FIXTWO model there is no reason to change the R-square measure. In the case of the FIXONE, FIXONETIME, and FIXTWO models, the R square is defined as the Theil (1961) R square as shown in the preceding equation. This makes intuitive sense since you are regressing a transformed (demeaned) series on transformed regressors, excluding a constant. In other words, you are looking at 1 minus the sum of squared errors divided by the sum of squares of the (transformed) dependent variable.

In the case of OLS estimation, both of the R-square formulas given here reduce to the usual R-square formula.

Specification Tests

The PANEL procedure outputs the results of one specification test for fixed effects and two specification tests for random effects.

For fixed effects, let β_f be the n dimensional vector of fixed-effects parameters. The specification test reported is the conventional F statistic for the hypothesis $\beta_f = \mathbf{0}$. The F statistic with $n, M - K$ degrees of freedom is computed as

$$\hat{\beta}_f' \hat{\mathbf{S}}_f^{-1} \hat{\beta}_f / n$$

where $\hat{\mathbf{S}}_f$ is the estimated covariance matrix of the fixed-effects parameters.

Hausman's (1978) specification test or m statistic can be used to test hypotheses in terms of bias or inconsistency of an estimator. This test was also proposed by Wu (1973) and further extended in Hausman and Taylor (1982). Hausman's m statistic is as follows.

Consider two estimators, $\hat{\beta}_a$ and $\hat{\beta}_b$, which under the null hypothesis are both consistent, but only $\hat{\beta}_a$ is asymptotically efficient. Under the alternative hypothesis, only $\hat{\beta}_b$ is consistent. The m statistic is

$$m = (\hat{\beta}_b - \hat{\beta}_a)' (\hat{\mathbf{S}}_b - \hat{\mathbf{S}}_a)^{-1} (\hat{\beta}_b - \hat{\beta}_a)$$

where $\hat{\mathbf{S}}_b$ and $\hat{\mathbf{S}}_a$ are consistent estimates of the asymptotic covariance matrices of $\hat{\beta}_b$ and $\hat{\beta}_a$. Then m is distributed χ^2 with k degrees of freedom, where k is the dimension of $\hat{\beta}_a$ and $\hat{\beta}_b$.

In the random-effects specification, the null hypothesis of no correlation between effects and regressors implies that the OLS estimates of the slope parameters are consistent and inefficient but the GLS estimates of the slope parameters are consistent and efficient. This facilitates a Hausman specification test. The reported χ^2 statistic has degrees of freedom equal to the number of slope parameters. If the null hypothesis holds, the random-effects specification should be used.

Breusch and Pagan (1980) lay out a Lagrange multiplier test for random effects based on the simple OLS (pooled) estimator. If \hat{u}_{it} is the it th residual from the OLS regression, then the Breusch-Pagan (BP) test for one-way random effects is

$$BP = \frac{NT}{2(T-1)} \left[\frac{\sum_{i=1}^N \left[\sum_{t=1}^T \hat{u}_{it} \right]^2}{\sum_{i=1}^N \sum_{t=1}^T \hat{u}_{it}^2} - 1 \right]^2$$

The BP test generalizes to the case of a two-way random-effects model (Greene 2000, page 589). Specifically,

$$\begin{aligned} BP2 = & \frac{NT}{2(T-1)} \left[\frac{\sum_{i=1}^n \left[\sum_{t=1}^T \hat{u}_{it} \right]^2}{\sum_{i=1}^N \sum_{t=1}^T \hat{u}_{it}^2} - 1 \right]^2 \\ & + \frac{NT}{2(N-1)} \left[\frac{\sum_{t=1}^T \left[\sum_{i=1}^N \hat{u}_{it} \right]^2}{\sum_{i=1}^N \sum_{t=1}^T \hat{u}_{it}^2} - 1 \right]^2 \end{aligned}$$

is distributed as a χ^2 statistic with two degrees of freedom. Since the BP2 test generalizes (nests the BP test) the test for random effects, the absence of random effects (nonrejection of the null of no random effects) in the BP2 is a fairly clear indication that there will probably not be any one-way effects either. In both cases (BP and BP2), the residuals are obtained from a pooled regression. There is very little extra cost in selecting both the BP and BP2 test. Notice that in the case of just groupwise heteroscedasticity, the BP2 test approaches BP. In the case of time based heteroscedasticity, the BP2 test reduces to a BP test of time effects. In the case of unbalanced panels, neither the BP nor BP2 statistics are valid.

Finally, you should be aware that the BP option generates different results depending on whether the estimation is FIXONE or FIXONETIME. Specifically, under the FIXONE estimation technique, the BP tests for cross-sectional random effects. Under the FIXONETIME estimation, the BP tests for time random effects.

While the Hausman statistic is automatically generated, you request Breusch-Pagan via the BP or BP2 option (see Baltagi 1995 for details).

Troubleshooting

Some guidelines need to be followed when you use PROC PANEL for analysis. For each cross section, PROC PANEL requires at least two time series observations with nonmissing values for all model variables. There should be at least two cross sections for each time point in the data. If these two conditions are not met, then an error message is printed in the log stating that there is only one cross section or time series observation and further computations will be terminated. You have to give adequate data for an estimation method to produce results, and you should check the log for any data related errors.

If the number of cross sections is greater than the number of time series observations per cross section, PROC PANEL while using PARKS method produces an error message stating that the phi matrix is singular.

This is analogous to seemingly unrelated regression with fewer observations than equations in the model. To avoid the problem, reduce the number of cross sections.

Your data set could have multiple observations for each time ID within a particular cross section. However, PROC PANEL is applicable only in cases where you have only a single observation for each time ID within each cross section. In such a case, after you have sorted the data, an error warning specifying that the data has not been sorted in ascending sequence with respect to time series ID appears in the log.

The cause of the error is due to multiple observations for each time ID for a given cross section. PROC PANEL allows only one observation for each time ID within each cross section.

The following data set shown in [Figure 20.2](#) illustrates the preceding instance with the correct representation.

Figure 20.2 Single Observation for Each Time Series

Obs	firm	year	production	cost
1	1	1955	5.36598	1.14867
2	1	1960	6.03787	1.45185
3	1	1965	6.37673	1.52257
4	1	1970	6.93245	1.76627
5	2	1955	6.54535	1.35041
6	2	1960	6.69827	1.71109
7	2	1965	7.40245	2.09519
8	2	1970	7.82644	2.39480

In this case, you can observe that there are no multiple observations with respect to a given time series ID within a cross section. This is the correct representation of a data set where PROC PANEL is applicable.

If for state ID 1 you have two observations for the year=1955, then PROC PANEL produces the following error message:

“The data set is not sorted in ascending sequence with respect to time series ID. The current time period has year=1955 and the previous time period has year=1955 in cross section firm=1.”

A data set similar to the previous example with multiple observations for the YEAR=1955 is shown in [Figure 20.3](#); this data set results in an error message due to multiple observations while using PROC PANEL.

Figure 20.3 Multiple Observations for Each Time Series

Obs	firm	year	production	cost
1	1	1955	5.36598	1.14867
2	1	1955	6.37673	1.52257
3	1	1960	6.03787	1.45185
4	1	1970	6.93245	1.76627
5	2	1955	6.54535	1.35041
6	2	1960	6.69827	1.71109
7	2	1965	7.40245	2.09519
8	2	1970	7.82644	2.39480

In order to use PROC PANEL, you need to aggregate the data so that you have unique time ID values within

each cross section. One possible way to do this is to run a PROC MEANS on the input data set and compute the mean of all the variables by FIRM and YEAR, and then use the output data set.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the PANEL procedure. The table below lists the graph names, the plot descriptions, and the options used.

Table 20.2 ODS Graphics Produced by PROC PANEL

ODS Graph Name	Plot Description	Plots=Option
DiagnosticsPanel	All applicable plots listed below	
ResidualPlot	Plot of the residuals	RESIDUAL, RESID
FitPlot	Predicted versus actual plot	FITPLOT
QQPlot	Plot of the quantiles of the residuals	QQ
ResidSurfacePlot	Surface plot of the residuals	RESIDSURFACE
PredSurfacePlot	Surface plot of the predicted values	PREDSURFACE
ActSurfacePlot	Surface plot of the actual values	ACTSURFACE
ResidStackPlot	Stack plot of the residuals	RESIDSTACK, RESSTACK
ResidHistogram	Plot of the histogram of residuals	RESIDUALHISTOGRAM, RESIDHISTOGRAM

The OUTPUT OUT= Data Set

PROC PANEL writes the initial data of the estimated model, predicted values, and residuals to an output data set when the OUTPUT OUT= statement is specified. The OUT= data set contains the following variables:

<code>_MODEL_</code>	is a character variable that contains the label for the MODEL statement if a label is specified.
<code>_METHOD_</code>	is a character variable that identifies the estimation method.
<code>_MODLNO_</code>	is the number of the model estimated.
<code>_ACTUAL_</code>	contains the value of the dependent variable.

<code>_WEIGHT_</code>	contains the weighing variable.
<code>_CSID_</code>	is the value of the cross section ID.
<code>_TSID_</code>	is the value of the time period in the dynamic model.
regressors	are the values of regressor variables specified in the MODEL statement.
<i>name</i>	if <code>PRED= name1</code> and/or <code>RESIDUAL= name2</code> options are specified, then <i>name1</i> and <i>name2</i> are the columns of predicted values of dependent variable and residuals of the regression, respectively.

The OUTEST= Data Set

PROC PANEL writes the parameter estimates to an output data set when the OUTEST= option is specified. The OUTEST= data set contains the following variables:

<code>_MODEL_</code>	is a character variable that contains the label for the MODEL statement if a label is specified.
<code>_METHOD_</code>	is a character variable that identifies the estimation method.
<code>_TYPE_</code>	is a character variable that identifies the type of observation. Values of the <code>_TYPE_</code> variable are CORR, COVB, CSPARMS, STD, and the type of model estimated. The CORR observation contains correlations of the parameter estimates, the COVB observation contains covariances of the parameter estimates, the CSPARMS observation contains cross-sectional parameter estimates, the STD observation indicates the row of standard deviations of the corresponding coefficients, and the type of model estimated observation contains the parameter estimates.
<code>_NAME_</code>	is a character variable that contains the name of a regressor variable for COVB and CORR observations and is left blank for other observations. The <code>_NAME_</code> variable is used in conjunction with the <code>_TYPE_</code> values COVB and CORR to identify rows of the correlation or covariance matrix.
<code>_DEPVAR_</code>	is a character variable that contains the name of the response variable.
<code>_MSE_</code>	is the mean square error of the transformed model.
<code>_CSID_</code>	is the value of the cross section ID for CSPARMS observations. The <code>_CSID_</code> variable is used with the <code>_TYPE_</code> value CSPARMS to identify the cross section for the first-order autoregressive parameter estimate contained in the observation. The <code>_CSID_</code> variable is missing for observations with other <code>_TYPE_</code> values. (Currently, only the <code>_A_1</code> variable contains values for CSPARMS observations.)
<code>_VARCS_</code>	is the variance component estimate due to cross sections. The <code>_VARCS_</code> variable is included in the OUTEST= data set when either the FULLER or DASILVA option is specified.
<code>_VARTS_</code>	is the variance component estimate due to time series. The <code>_VARTS_</code> variable is included in the OUTEST= data set when either the FULLER or DASILVA option is specified.
<code>_VARERR_</code>	is the variance component estimate due to error. The <code>_VARERR_</code> variable is included in the OUTEST= data set when the FULLER option is specified.

<code>_A_1</code>	is the first-order autoregressive parameter estimate. The <code>_A_1</code> variable is included in the <code>OUTEST=</code> data set when the <code>PARKS</code> option is specified. The values of <code>_A_1</code> are cross-sectional parameters, meaning that they are estimated for each cross section separately. The <code>_A_1</code> variable has a value only for <code>_TYPE_=CSPARMS</code> observations. The cross section to which the estimate belongs is indicated by the <code>_CSID_</code> variable.
Intercept	is the intercept parameter estimate. (Intercept is missing for models when the <code>NOINT</code> option is specified.)
regressors	are the regressor variables specified in the <code>MODEL</code> statement. The regressor variables in the <code>OUTEST=</code> data set contain the corresponding parameter estimates for the model identified by <code>_MODEL_</code> for <code>_TYPE_=PARMS</code> observations, and the corresponding covariance or correlation matrix elements for <code>_TYPE_=COVB</code> and <code>_TYPE_=CORRB</code> observations. The response variable contains the value -1 for the <code>_TYPE_=PARMS</code> observation for its model.

The OUTTRANS= Data Set

PROC PANEL writes the transformed series to an output data set. That is, if the user selects `FIXONE`, `FIXONETIME`, or `RANONE` and supplies the `OUTTRANS =` option, the transformed dependent variable and independent variables are written out to a SAS data set; other variables in the input data set are copied unchanged.

Say that your data set contains variables `y`, `x1`, `x2`, `x3`, and `z2`. The following statements result in a SAS data set:

```
proc panel data=datain outtrans=dataout;
  id cs ts;
  model y = x1 x2 x3 / fixone;
run;
```

First, `z2` is copied over. Then `_Int`, `x1`, `x2`, `y`, and `x3`, are replaced with their mean deviates (from cross sections). Furthermore, two new variables are created.

<code>_MODELL_</code>	is the model's label (if it exists).
<code>_METHOD_</code>	is the model's transformation type. In the <code>FIXONE</code> case, this is <code>_FIXONE_</code> or <code>_FIXONETIME_</code> . If the model <code>RANONE</code> model is selected, the <code>_METHOD_</code> variable is either <code>_Ran1FB_</code> , <code>_Ran1WK_</code> , <code>_Ran1WH_</code> , or <code>_Ran1NL_</code> , depending on the variance component estimators chosen.

Printed Output

For each `MODEL` statement, the printed output from PROC PANEL includes the following:

- a model description, which gives the estimation method used, the model statement label if specified, the number of cross sections and the number of observations in each cross section, and the order of moving average error process for the DASILVA option. For fixed-effects model analysis, an F test for the absence of fixed effects is produced, and for random-effects model analysis, a Hausman test is used for the appropriateness of the random-effects specification.
- the estimates of the underlying error structure parameters
- the regression parameter estimates and analysis. For each regressor, this includes the name of the regressor, the degrees of freedom, the parameter estimate, the standard error of the estimate, a t statistic for testing whether the estimate is significantly different from 0, and the significance probability of the t statistic.

Optionally, PROC PANEL prints the following:

- the covariance and correlation of the resulting regression parameter estimates for each model and assumed error structure
- the $\hat{\Phi}$ matrix that is the estimated contemporaneous covariance matrix for the PARKS option

ODS Table Names

PROC PANEL assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in Table 20.3.

Table 20.3 ODS Tables Produced in PROC PANEL

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ModelDescription	Model description	Default
FitStatistics	Fit statistics	Default
FixedEffectsTest	F test for no fixed effects	FIXONE, FIXTWO, FIXONETIME
ParameterEstimates	Parameter estimates	Default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlations of parameter estimates	CORRB
VarianceComponents	Variance component estimates	RANONE, RANTWO, DASILVA
RandomEffectsTest	Hausman test for random effects	RANONE, RANTWO
AR1Estimates	First-order autoregressive parameter estimates	RHO(PARKS)
BreuschPaganTest	Breusch-Pagan one-way test	BP

Table 20.3 (continued)

ODS Table Name	Description	Option
BreuschPaganTest2	Breusch-Pagan two-way test	BP2
Sargan	Sargan's test for overidentification	GMM
ARTest	Autoregression test for the residuals	GMM
IterHist	Iteration history	ITPRINT(ITGMM)
ConvergenceStatus	Convergence status of iterated GMM estimator	ITGMM
EstimatedPhiMatrix	Estimated phi matrix	PARKS
EstimatedAutocovariances	Estimates of autocovariances	DASILVA
ODS Tables Created by the TEST Statement		
TestResults	Test results	

Example: PANEL Procedure

Example 20.1: Analyzing Demand for Liquid Assets

In this example, the demand equations for liquid assets are estimated. The demand function for the demand deposits is estimated under three error structures while demand equations for time deposits and savings and loan (S&L) association shares are calculated using the Parks method. The data for seven states (CA, DC, FL, IL, NY, TX, and WA) are selected out of 49 states. See Feige (1964) for data description. All variables were transformed via natural logarithm. The data set A is shown below.

```
data a;
  length state $ 2;
  input state $ year d t s y rd rt rs;
  label d = 'Per Capita Demand Deposits'
        t = 'Per Capita Time Deposits'
        s = 'Per Capita S & L Association Shares'
        y = 'Permanent Per Capita Personal Income'
        rd = 'Service Charge on Demand Deposits'
        rt = 'Interest on Time Deposits'
        rs = 'Interest on S & L Association Shares';
datalines;
CA  1949  6.2785  6.1924  4.4998  7.2056 -1.0700  0.1080  1.0664
CA  1950  6.4019  6.2106  4.6821  7.2889 -1.0106  0.1501  1.0767
CA  1951  6.5058  6.2729  4.8598  7.3827 -1.0024  0.4008  1.1291
CA  1952  6.4785  6.2729  5.0039  7.4000 -0.9970  0.4492  1.1227
CA  1953  6.4118  6.2538  5.1761  7.4200 -0.8916  0.4662  1.2110
... more lines ...
```

As shown in the following statements, the SORT procedure is used to sort the data into the required time series cross-sectional format; then PROC PANEL analyzes the data.

```
proc sort data=a;
    by state year;
run;

proc panel data=a;
    model d = y rd rt rs / fuller parks dasilva m=7;
    model t = y rd rt rs / parks;
    model s = y rd rt rs / parks;
    id state year;
run;
```

The income elasticities for liquid assets are greater than 1 except for the demand deposit income elasticity (0.692757) estimated by the Da Silva method. In [Output 20.1.1](#), [Output 20.1.2](#), and [Output 20.1.3](#), the coefficient estimates (−0.29094, −0.43591, and −0.27736) of demand deposits (RD) imply that demand deposits increase significantly as the service charge is reduced. The price elasticities (0.227152 and 0.408066) for time deposits (RT) and S&L association shares (RS) have the expected sign. Thus an increase in the interest rate on time deposits or S&L shares will increase the demand for the corresponding liquid asset. Demand deposits and S&L shares appear to be substitutes (see [Output 20.1.2](#), [Output 20.1.3](#), and [Output 20.1.5](#)). Time deposits are also substitutes for S&L shares in the time deposit demand equation (see [Output 20.1.4](#)), while these liquid assets are independent of each other in [Output 20.1.5](#) (insignificant coefficient estimate of RT, −0.02705). Demand deposits and time deposits appear to be weak complements in [Output 20.1.3](#) and [Output 20.1.4](#), while the cross elasticities between demand deposits and time deposits are not significant in [Output 20.1.2](#) and [Output 20.1.5](#).

Output 20.1.1 Demand for Demand Deposits, Fuller-Battese Method

The PANEL Procedure			
Fuller and Battese Variance Components (RanTwo)			
Dependent Variable: d Per Capita Demand Deposits			
Model Description			
Estimation Method	Fuller		
Number of Cross Sections	7		
Time Series Length	11		
Fit Statistics			
SSE	0.0795	DFE	72
MSE	0.0011	Root MSE	0.0332
R-Square	0.6786		
Variance Component Estimates			
Variance Component for Cross Sections	0.03427		
Variance Component for Time Series	0.00026		
Variance Component for Error	0.00111		

Output 20.1.1 *continued*

Hausman Test for Random Effects						
	DF	m	Value	Pr	> m	
	4		5.51	0.2385		
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
Intercept	1	-1.23606	0.7252	-1.70	0.0926	Intercept
y	1	1.064058	0.1040	10.23	<.0001	Permanent Per Capita Personal Income
rd	1	-0.29094	0.0526	-5.53	<.0001	Service Charge on Demand Deposits
rt	1	0.039388	0.0278	1.42	0.1603	Interest on Time Deposits
rs	1	-0.32662	0.1140	-2.86	0.0055	Interest on S & L Association Shares

Output 20.1.2 Demand for Demand Deposits, Parks Method

The PANEL Procedure			
Parks Method Estimation			
Dependent Variable: d Per Capita Demand Deposits			
Model Description			
Estimation Method		Parks	
Number of Cross Sections		7	
Time Series Length		11	
Fit Statistics			
SSE	40.0198	DFE	72
MSE	0.5558	Root MSE	0.7455
R-Square	0.9263		

Output 20.1.2 *continued*

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
Intercept	1	-2.66565	0.4250	-6.27	<.0001	Intercept
y	1	1.222569	0.0573	21.33	<.0001	Permanent Per Capita Personal Income
rd	1	-0.43591	0.0272	-16.03	<.0001	Service Charge on Demand Deposits
rt	1	0.041237	0.0284	1.45	0.1505	Interest on Time Deposits
rs	1	-0.26683	0.0886	-3.01	0.0036	Interest on S & L Association Shares

Output 20.1.3 Demand for Demand Deposits, DaSilva Method

The PANEL Procedure			
Da Silva Method Estimation			
Dependent Variable: d Per Capita Demand Deposits			
Model Description			
Estimation Method		DaSilva	
Number of Cross Sections		7	
Time Series Length		11	
Order of MA Error Process		7	
Fit Statistics			
SSE	21609.8923	DFE	72
MSE	300.1374	Root MSE	17.3245
R-Square	0.4995		
Variance Component Estimates			
Variance Component for Cross Sections		0.03063	
Variance Component for Time Series		0.000148	
Estimates of Autocovariances			
Lag	Gamma		
0	0.0008558553		
1	0.0009081747		
2	0.0008494797		
3	0.0007889687		
4	0.0013281983		
5	0.0011091685		
6	0.0009874973		
7	0.0008462601		

Output 20.1.3 *continued*

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
Intercept	1	1.281084	0.0824	15.55	<.0001	Intercept
y	1	0.692757	0.00677	102.40	<.0001	Permanent Per Capita Personal Income
rd	1	-0.27736	0.00274	-101.18	<.0001	Service Charge on Demand Deposits
rt	1	0.009378	0.00171	5.49	<.0001	Interest on Time Deposits
rs	1	-0.09942	0.00601	-16.53	<.0001	Interest on S & L Association Shares

Output 20.1.4 Demand for Time Deposits, Parks Method

The PANEL Procedure						
Parks Method Estimation						
Dependent Variable: t Per Capita Time Deposits						
Model Description						
Estimation Method			Parks			
Number of Cross Sections			7			
Time Series Length			11			
Fit Statistics						
SSE	34.5713		DFE	72		
MSE	0.4802		Root MSE	0.6929		
R-Square	0.9517					
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
Intercept	1	-5.33334	0.6780	-7.87	<.0001	Intercept
y	1	1.516344	0.1097	13.82	<.0001	Permanent Per Capita Personal Income
rd	1	-0.04791	0.0399	-1.20	0.2335	Service Charge on Demand Deposits
rt	1	0.227152	0.0449	5.06	<.0001	Interest on Time Deposits
rs	1	-0.42569	0.1708	-2.49	0.0150	Interest on S & L Association Shares

Output 20.1.5 Demand for Savings and Loan Shares, Parks Method

The PANEL Procedure						
Parks Method Estimation						
Dependent Variable: s Per Capita S & L Association Shares						
Model Description						
Estimation Method			Parks			
Number of Cross Sections			7			
Time Series Length			11			
Fit Statistics						
SSE	39.2550	DFE	72			
MSE	0.5452	Root MSE	0.7384			
R-Square	0.9017					
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
Intercept	1	-8.09632	1.0628	-7.62	<.0001	Intercept
y	1	1.832988	0.1567	11.70	<.0001	Permanent Per Capita Personal Income
rd	1	0.576723	0.0589	9.80	<.0001	Service Charge on Demand Deposits
rt	1	-0.02705	0.0423	-0.64	0.5242	Interest on Time Deposits
rs	1	0.408066	0.1478	2.76	0.0073	Interest on S & L Association Shares

Example 20.2: The Airline Cost Data: Fixtwo Model

The Christenson Associates airline data are a frequently cited data set (see Greene 2000). The data measure costs, prices of inputs, and utilization rates for six airlines over the time span 1970–1984. This example analyzes the log transformations of the cost, price and quantity, and the raw (not logged) capacity utilization measure. You speculate the following model:

$$\ln(TC_{it}) = \alpha_N + \gamma_T + (\alpha_i - \alpha_N) + (\gamma_t - \gamma_T) + \beta_1 \ln(Q_{it}) + \beta_2 \ln(PF_{it}) + \beta_3 LF_{it} + \epsilon_{it}$$

where the α are the pure cross-sectional effects and γ are the time effects. The actual model speculated is highly nonlinear in the original variables. It would look like the following:

$$TC_{it} = \exp(\alpha_i + \gamma_t + \beta_3 LF_{it} + \epsilon_{it}) Q_{it}^{\beta_1} PF_{it}^{\beta_2}$$

The data and preliminary SAS statements are:

```
data airline;
  input  Obs I T C Q PF LF;
  label obs = "Observation number";
  label I  = "Firm Number (CSID)";
  label T  = "Time period (TSID)";
  label Q  = "Output in revenue passenger miles (index)";
  label C  = "Total cost, in thousands";
  label PF = "Fuel price";
  label LF = "Load Factor (utilization index)";
datalines;

... more lines ...
```

```
data airline;
  set airline;
  lC = log(C);
  lQ = log(Q);
  lPF = log(PF);
  label lC = "Log transformation of costs";
  label lQ = "Log transformation of quantity";
  label lPF = "Log transformation of price of fuel";
run;
```

The following statements fit the model.

```
proc panel data=airline;
  id i t;
  model lC = lQ lPF LF / fixtwo;
run;
```

First, you see the model's description in [Output 20.2.1](#). The model is a two-way fixed-effects model. There are six cross sections and fifteen time observations.

Output 20.2.1 The Airline Cost Data—Model Description

The PANEL Procedure	
Fixed Two Way Estimates	
Dependent Variable: lC Log transformation of costs	
Model Description	
Estimation Method	FixTwo
Number of Cross Sections	6
Time Series Length	15

The R square and degrees of freedom can be seen in [Table 20.2.2](#). On the whole, you see a large R square, so there is a reasonable fit. The degrees of freedom of the estimate are 90 minus 14 time dummy variables minus 5 cross section dummy variables and 4 regressors.

Output 20.2.2 The Airline Cost Data—Fit Statistics

Fit Statistics			
SSE	0.1768	DFE	67
MSE	0.0026	Root MSE	0.0514
R-Square	0.9984		

The F test for fixed effects is shown in [Table 20.2.3](#). Testing the hypothesis that there are no fixed effects, you easily reject the null of poolability. There are group effects, or time effects, or both. The test is highly significant. OLS would not give reasonable results.

Output 20.2.3 The Airline Cost Data—Test for Fixed Effects

F Test for No Fixed Effects			
Num DF	Den DF	F Value	Pr > F
19	67	23.10	<.0001

Looking at the parameters, you see a more complicated pattern. Most of the cross-sectional effects are highly significant (with the exception of CS2). This means that the cross sections are significantly different from the sixth cross section. Many of the time effects show significance, but this is not uniform. It looks like the significance might be driven by a large 16th period effect, since the first six time effects are negative and of similar magnitude. The time dummy variables taper off in size and lose significance from time period 12 onward. There are many causes to which you could attribute this decay of time effects. The time period of the data spans the OPEC oil embargoes and the dissolution of the Civil Aeronautics Board (CAB). These two forces are two possible reasons to observe the decay and parameter instability. As for the regression parameters, you see that quantity affects cost positively, and the price of fuel has a positive effect, but load factors negatively affect the costs of the airlines in this sample. The somewhat disturbing result is that the fuel cost is not significant. If the time effects are proxies for the effect of the oil embargoes, then an insignificant fuel cost parameter would make some sense. If the dummy variables proxy for the dissolution of the CAB, then the effect of load factors is also not being precisely estimated.

Output 20.2.4 The Airline Cost Data—Parameter Estimates

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
CS1	1	0.174237	0.0861	2.02	0.0470	Cross Sectional Effect 1
CS2	1	0.111412	0.0780	1.43	0.1576	Cross Sectional Effect 2
CS3	1	-0.14354	0.0519	-2.77	0.0073	Cross Sectional Effect 3
CS4	1	0.18019	0.0321	5.61	<.0001	Cross Sectional Effect 4
CS5	1	-0.04671	0.0225	-2.08	0.0415	Cross Sectional Effect 5
TS1	1	-0.69286	0.3378	-2.05	0.0442	Time Series Effect 1
TS2	1	-0.63816	0.3321	-1.92	0.0589	Time Series Effect 2
TS3	1	-0.59554	0.3294	-1.81	0.0751	Time Series Effect 3
TS4	1	-0.54192	0.3189	-1.70	0.0939	Time Series Effect 4
TS5	1	-0.47288	0.2319	-2.04	0.0454	Time Series Effect 5
TS6	1	-0.42705	0.1884	-2.27	0.0267	Time Series Effect 6
TS7	1	-0.39586	0.1733	-2.28	0.0255	Time Series Effect 7
TS8	1	-0.33972	0.1501	-2.26	0.0269	Time Series Effect 8
TS9	1	-0.2718	0.1348	-2.02	0.0478	Time Series Effect 9
TS10	1	-0.22734	0.0763	-2.98	0.0040	Time Series Effect 10
TS11	1	-0.1118	0.0319	-3.50	0.0008	Time Series Effect 11
TS12	1	-0.03366	0.0429	-0.78	0.4354	Time Series Effect 12
TS13	1	-0.01775	0.0363	-0.49	0.6261	Time Series Effect 13
TS14	1	-0.01865	0.0305	-0.61	0.5430	Time Series Effect 14
Intercept	1	12.93834	2.2181	5.83	<.0001	Intercept
lQ	1	0.817264	0.0318	25.66	<.0001	Log transformation of quantity
lPF	1	0.168732	0.1635	1.03	0.3057	Log transformation of price of fuel
LF	1	-0.88267	0.2617	-3.37	0.0012	Load Factor (utilization index)

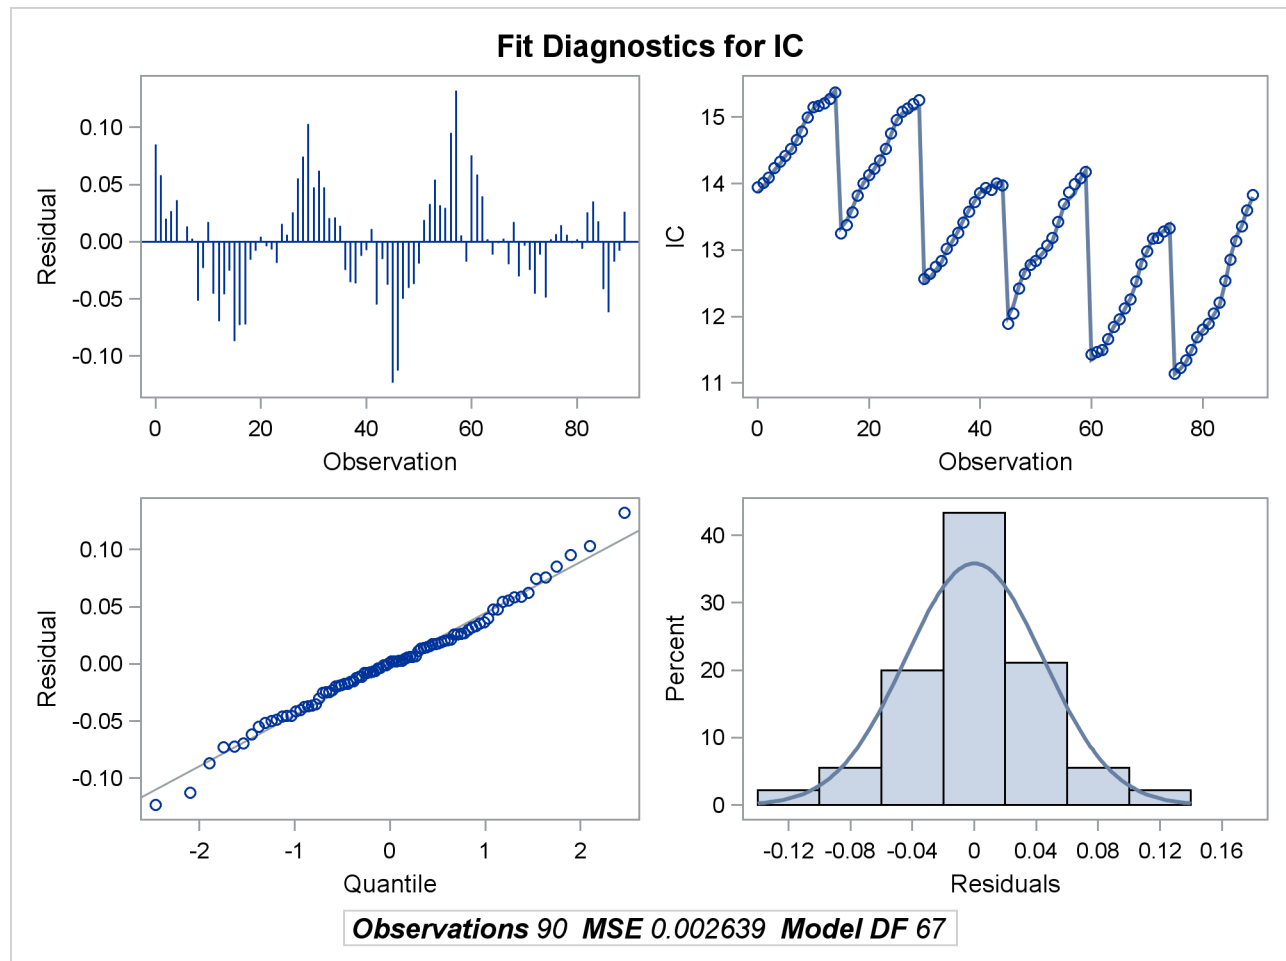
ODS Graphics Plots

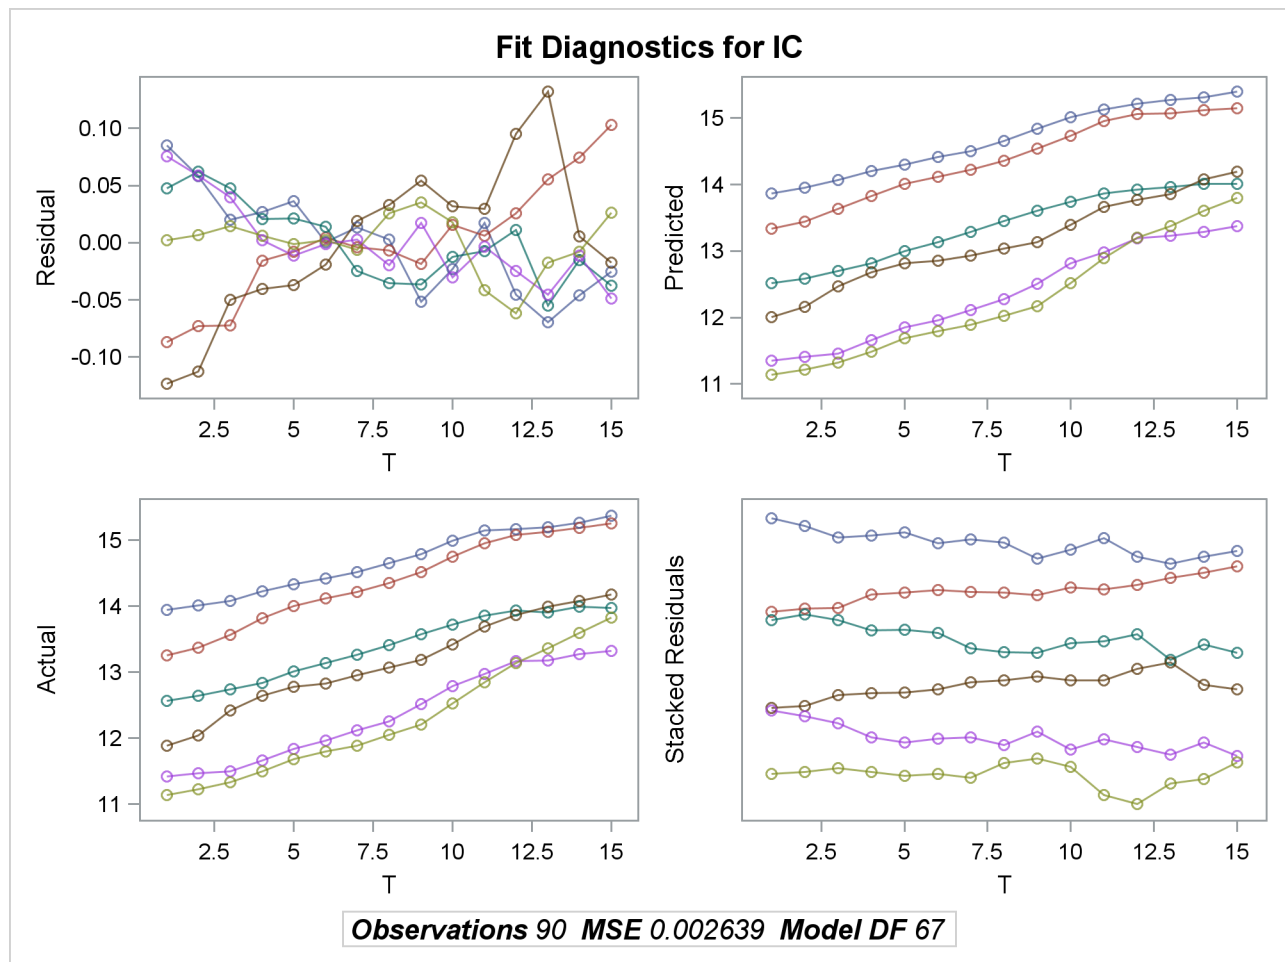
ODS graphics plots can be obtained to graphically analyze the results. The following statements show how to generate the plots. If the PLOTS=ALL option is specified, all available plots are produced in two panels. For a complete list of options, see the section “ODS Graphics” on page 1396.

```
proc panel data=airline;
  id i t;
  model lC = lQ lPF LF / fixtwo plots = all;
run;
```

The preceding statements result in plots shown in [Output 20.2.5](#) and [Output 20.2.6](#).

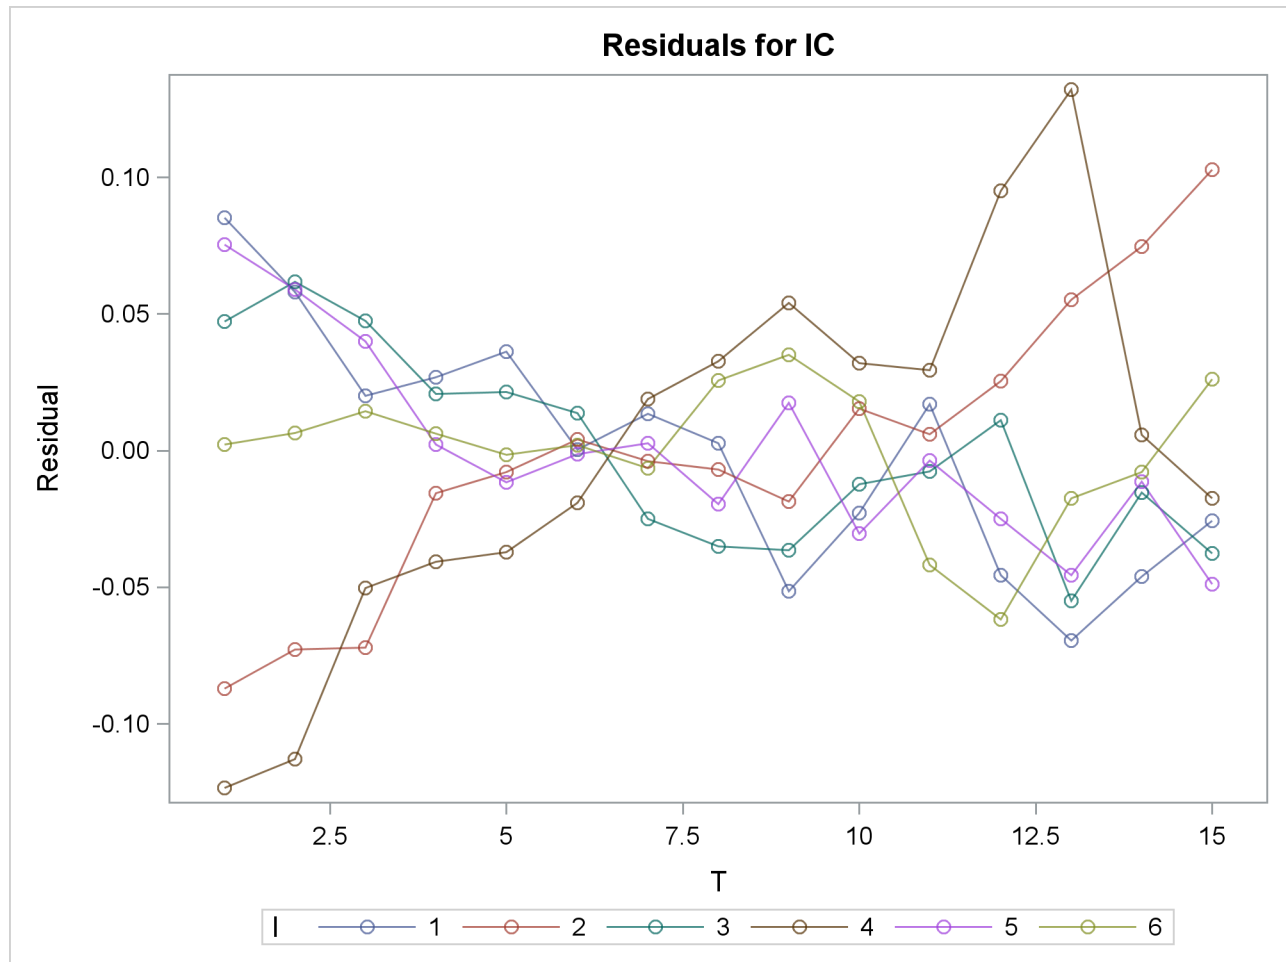
Output 20.2.5 Diagnostic Panel 1



Output 20.2.6 Diagnostic Panel 2

The UNPACK and ONLY options produce individual detail images of paneled plots. The graph shown in [Output 20.2.7](#) shows a detail plot of residuals by cross section. The packed version always puts all cross sections on one plot while the unpacked one shows the cross sections in groups of ten to avoid loss of detail.

```
proc panel data=airline;
  id i t;
  model lc = lq lpf lf / fixtwo plots(unpack only) = residsurface;
run;
```

Output 20.2.7 Surface Plot of the Residual

Example 20.3: The Airline Cost Data: Further Analysis

Using the same data as in [Example 20.2](#), you further investigate the ‘true’ effect of fuel prices. Specifically, you run the FixOne model, ignoring time effects. You specify the following statements in PROC PANEL to run this model:

```
proc panel data=airline;
  id i t;
  model lC = lQ lPF LF / fixone;
run;
```

The preceding statements result in [Output 20.3.1](#). The fit seems to have deteriorated somewhat. The SSE rises from 0.1768 to 0.2926.

Output 20.3.1 The Airline Cost Data—Fit Statistics

The PANEL Procedure			
Fixed One Way Estimates			
Dependent Variable: lC Log transformation of costs			
Fit Statistics			
SSE	0.2926	DFE	81
MSE	0.0036	Root MSE	0.0601
R-Square	0.9974		

You still reject poolability based on the F test in [Output 20.3.2](#) at all accepted levels of significance.

Output 20.3.2 The Airline Cost Data—Test for Fixed Effects

F Test for No Fixed Effects			
Num DF	Den DF	F Value	Pr > F
5	81	57.74	<.0001

The parameters change somewhat dramatically as shown in [Output 20.3.3](#). The effect of fuel costs comes in very strong and significant. The load factor's coefficient increases, although not as dramatically. This suggests that the fixed time effects might be proxies for both the oil shocks and deregulation.

Output 20.3.3 The Airline Cost Data—Parameter Estimates

Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
CS1	1	-0.08708	0.0842	-1.03	0.3041	Cross Sectional Effect 1
CS2	1	-0.12832	0.0757	-1.69	0.0940	Cross Sectional Effect 2
CS3	1	-0.29599	0.0500	-5.92	<.0001	Cross Sectional Effect 3
CS4	1	0.097487	0.0330	2.95	0.0041	Cross Sectional Effect 4
CS5	1	-0.06301	0.0239	-2.64	0.0100	Cross Sectional Effect 5
Intercept	1	9.79304	0.2636	37.15	<.0001	Intercept
lQ	1	0.919293	0.0299	30.76	<.0001	Log transformation of quantity
lPF	1	0.417492	0.0152	27.47	<.0001	Log transformation of price of fuel
LF	1	-1.07044	0.2017	-5.31	<.0001	Load Factor (utilization index)

Example 20.4: The Airline Cost Data: Random-Effects Models

This example continues to use the Christenson Associates airline data, which measures costs, prices of inputs, and utilization rates for six airlines over the time span 1970–1984. There are six cross sections and fifteen time observations. Here, you examine the different estimates generated from the one-way random-effects and two-way random-effects models, by using four different methods to estimate the variance components: Fuller and Battese, Wansbeek and Kapteyn, Wallace and Hussain, and Nerlove.

The data for this example is created by the PROC PANEL statements shown in [Example 20.2](#). The PROC PANEL statements necessary to generate the estimates are as follows:

```
proc panel data=airline outest=estimates;
  id I T;
  RANONE:   model lC = lQ lPF lF / ranone vcomp=fb;
  RANONEwk: model lC = lQ lPF lF / ranone vcomp=wk;
  RANONEwh: model lC = lQ lPF lF / ranone vcomp=wh;
  RANONEnl: model lC = lQ lPF lF / ranone vcomp=nl;
  RANTWO:   model lC = lQ lPF lF / rantwo vcomp=fb;
  RANTWOwk: model lC = lQ lPF lF / rantwo vcomp=wk;
  RANTWOwh: model lC = lQ lPF lF / rantwo vcomp=wh;
  RANTWOnl: model lC = lQ lPF lF / rantwo vcomp=nl;
  POOLED:   model lC = lQ lPF lF / pooled;
  BTWNG:    model lC = lQ lPF lF / btwng;
  BTWNT:    model lC = lQ lPF lF / btwnt;
run;

data table;
  set estimates;
  VarCS = round(_VARCS_, .00001);
  VarTS = round(_VARTS_, .00001);
  VarErr = round(_VARERR_, .00001);
  Int = round(Intercept, .0001);
  lQ2 = round(lQ, .0001);
  lPF2 = round(lPF, .0001);
  lF2 = round(lF, .0001);
  if _n_ >= 9 then do;
    VarCS = . ;
    VarTS = . ;
  end;
  keep _MODEL_ _METHOD_ VarCS VarTS VarErr Int lQ2 lPF2 lF2;
run;
```

The parameter estimates and variance components for both models are reported in [Output 20.4.1](#) and [Output 20.4.2](#).

Output 20.4.1 Parameter Estimates

Parameter Estimates					
Method	Model	Intercept	lQ	lPF	lF
<u>Ran1FB</u>	RANONE	9.7097	0.9187	0.4177	-1.0700
<u>Ran1WK</u>	RANONEWK	9.6295	0.9069	0.4227	-1.0646
<u>Ran1WH</u>	RANONEWH	9.6439	0.9090	0.4218	-1.0650
<u>Ran1NL</u>	RANONENL	9.6406	0.9086	0.4220	-1.0648
<u>Ran2FB</u>	RANTWO	9.3627	0.8665	0.4362	-0.9805
<u>Ran2WK</u>	RANTWOWK	9.6436	0.8433	0.4097	-0.9263
<u>Ran2WH</u>	RANTWOWH	9.3793	0.8692	0.4353	-0.9852
<u>Ran2NL</u>	RANTWONL	9.9726	0.8387	0.3829	-0.9134
<u>POOLED</u>	POOLED	9.5169	0.8827	0.4540	-1.6275
<u>BTWGRP</u>	BTWNG	85.8094	0.7825	-5.5240	-1.7509
<u>BTWTME</u>	BTWNT	11.1849	1.1333	0.3343	-1.3509

Output 20.4.2 Variance Component Estimates

Variance Component Estimates				
Method	Model	Variance Component for Cross Sections	Variance Component for Time Series	Variance Component for Error
<u>Ran1FB</u>	RANONE	0.47442	.	0.00361
<u>Ran1WK</u>	RANONEWK	0.01602	.	0.00361
<u>Ran1WH</u>	RANONEWH	0.01871	.	0.00328
<u>Ran1NL</u>	RANONENL	0.01745	.	0.00325
<u>Ran2FB</u>	RANTWO	0.01744	0.00108	0.00264
<u>Ran2WK</u>	RANTWOWK	0.01561	0.03913	0.00264
<u>Ran2WH</u>	RANTWOWH	0.01875	0.00085	0.00250
<u>Ran2NL</u>	RANTWONL	0.01707	0.05909	0.00196
<u>POOLED</u>	POOLED	.	.	0.01553
<u>BTWGRP</u>	BTWNG	.	.	0.01584
<u>BTWTME</u>	BTWNT	.	.	0.00051

In the random-effects model, individual constant terms are viewed as randomly distributed across cross-sectional units and not as parametric shifts of the regression function, as in the fixed-effects model. This is appropriate when the sampled cross-sectional units are drawn from a large population. Clearly, in this example, the six airlines are a sample of all the airlines in the industry and not an exhaustive, or nearly exhaustive, list.

There are four ways of computing the variance components in the one-way random-effects model. The method by Fuller and Battese (1974) (FB), uses a “fitting of constants” methods to estimate them. The Wansbeek and Kapteyn (1989) (WK) method uses the true disturbances, while the Wallace and Hussain (WH) method uses ordinary least squares residuals.

Looking at the estimates of the variance components for cross section and error in [Output 20.4.2](#), you see that equal variance components for error are computed for both FB and WK, while WH and NL are nearly

equal.

All four techniques produce different variance components for cross sections. These estimates are then used to estimate the values of the parameters in [Output 20.4.1](#). All the parameters appear to have similar and equally plausible estimates. Both the index for output in revenue passenger miles (IQ) and fuel price (IPF) have small, positive effects on total costs, which you would expect. The load factor (LF) has a somewhat larger and negative effect on total costs, suggesting that as utilization increases, costs decrease.

As in the one-way random-effects model, the variance components for error produced by the FB and WK methods are equal. However, in this case, the WH and NL methods produce variance estimates that are dissimilar. The estimates of the variance component for cross sections are all different, but in a close range. The same cannot be said for the variance component for time series. As varied as each of the variance estimates may be, they produce parameter estimates that are similar and plausible. As with the one-way effects model, the index for output (IQ) and fuel price (IPF) are small and positive. The load factor (LF) estimates are all negative and, with the exception of the estimate produced by the WH method, somewhat smaller than the estimates produced in the one-way model. During the time the data were collected, the Civil Aeronautics Board dissolved, so it is possible that the dummy variables are proxies for this dissolution. This would lead to the decay of time effects and an imprecise estimation of the effects of the load factors, even though the estimates are statistically significant.

The pooled estimates give you something to compare the random-effects estimates against. You see that signs and magnitudes of output and fuel price are similar but that the magnitude of the load factor coefficient is somewhat larger under pooling. Since the model appears to have both cross-sectional and time series effects, the pooled model should not be used.

Finally, you examine the between groups estimators. For the between groups estimate, you are looking at each airline's data averaged across time. You see in [Output 20.4.1](#) that the between groups parameter estimates are radically different from all other parameter estimates. This could indicate that the time component is not being appropriately handled with this technique. For the between times estimate, you are looking at the average across all airlines in each time period. In this case, the parameter estimates are of the same sign and closer in magnitude to the previously computed estimates. Both the output and load factor effects appear to have more bearing on total costs.

Example 20.5: Using the FLATDATA Statement

Sometimes the data can be found in compressed form, where each line consists of all observations for the dependent and independent variables for the cross section. To illustrate, suppose you have a data set with 20 cross sections where each cross section consists of observations for six time periods. Each time period has values for dependent and independent variables $Y_1 \dots Y_6$ and $X_1 \dots X_6$. The *cs* and *num* variables represent other character and numeric variables that are constant across each cross section.

The observations for first five cross sections along with other variables are shown in [Output 20.5.1](#). In this example, *i* represents the cross section. The time period is identified by the subscript on the *Y* and *X* variables; it ranges from 1 to 6.

Output 20.5.1 Compressed Data Set

Obs	i	cs	num	X_1	X_2	X_3	X_4	X_5
1	1	CS1	-1.56058	0.40268	0.91951	0.69482	-2.28899	-1.32762
2	2	CS2	0.30989	1.01950	-0.04699	-0.96695	-1.08345	-0.05180
3	3	CS3	0.85054	0.60325	0.71154	0.66168	-0.66823	-1.87550
4	4	CS4	-0.18885	-0.64946	-1.23355	0.04554	-0.24996	0.09685
5	5	CS5	-0.04761	-0.79692	0.63445	-2.23539	-0.37629	-0.82212
Obs		X_6	Y_1	Y_2	Y_3	Y_4	Y_5	Y_6
1		1.92348	2.30418	2.11850	2.66009	-4.94104	-0.83053	5.01359
2		0.30266	4.50982	3.73887	1.44984	-1.02996	2.78260	1.73856
3		0.55065	4.07276	4.89621	3.90470	1.03437	0.54598	5.01460
4		-0.92771	2.40304	1.48182	2.70579	3.82672	4.01117	1.97639
5		-0.70566	3.58092	6.08917	3.08249	4.26605	3.65452	0.81826

Since the PANEL procedure cannot work directly with the data in compressed form, the FLATDATA statement can be used to transform the data. The OUT= option can be used to output transformed data to a data set.

```
proc panel data=flattest;
  flatdata indid=i tname="t" base=(X Y)
    keep=( cs num seed ) / out=flat_out;
  id i t;
  model y = x / fixone noint;
run;
```

First, six observations for the uncompressed data set and results for the one-way fixed-effects model fitted are shown in [Output 20.5.2](#) and [Output 20.5.3](#).

Output 20.5.2 Uncompressed Data Set

Obs	I	t	X	Y	CS	NUM
1	1	1	0.40268	2.30418	CS1	-1.56058
2	1	2	0.91951	2.11850	CS1	-1.56058
3	1	3	0.69482	2.66009	CS1	-1.56058
4	1	4	-2.28899	-4.94104	CS1	-1.56058
5	1	5	-1.32762	-0.83053	CS1	-1.56058
6	1	6	1.92348	5.01359	CS1	-1.56058

Output 20.5.3 Estimation with the FLATDATA Statement

The PANEL Procedure						
Fixed One Way Estimates						
Dependent Variable: Y						
Parameter Estimates						
Variable	DF	Estimate	Standard Error	t Value	Pr > t	Label
CS1	1	0.945589	0.4579	2.06	0.0416	Cross Sectional Effect 1
CS2	1	2.475449	0.4582	5.40	<.0001	Cross Sectional Effect 2
CS3	1	3.250337	0.4579	7.10	<.0001	Cross Sectional Effect 3
CS4	1	3.712149	0.4617	8.04	<.0001	Cross Sectional Effect 4
CS5	1	5.023584	0.4661	10.78	<.0001	Cross Sectional Effect 5
CS6	1	6.791074	0.4707	14.43	<.0001	Cross Sectional Effect 6
CS7	1	6.11374	0.4649	13.15	<.0001	Cross Sectional Effect 7
CS8	1	8.733843	0.4580	19.07	<.0001	Cross Sectional Effect 8
CS9	1	8.916685	0.4587	19.44	<.0001	Cross Sectional Effect 9
CS10	1	8.913916	0.4614	19.32	<.0001	Cross Sectional Effect 10
CS11	1	10.82881	0.4580	23.64	<.0001	Cross Sectional Effect 11
CS12	1	11.40867	0.4603	24.79	<.0001	Cross Sectional Effect 12
CS13	1	12.8865	0.4585	28.10	<.0001	Cross Sectional Effect 13
CS14	1	13.37819	0.4580	29.21	<.0001	Cross Sectional Effect 14
CS15	1	14.72619	0.4579	32.16	<.0001	Cross Sectional Effect 15
CS16	1	15.58813	0.4580	34.04	<.0001	Cross Sectional Effect 16
CS17	1	17.77983	0.4579	38.83	<.0001	Cross Sectional Effect 17
CS18	1	17.9909	0.4618	38.96	<.0001	Cross Sectional Effect 18
CS19	1	18.87283	0.4583	41.18	<.0001	Cross Sectional Effect 19
CS20	1	19.40034	0.4579	42.37	<.0001	Cross Sectional Effect 20
X	1	2.010753	0.1217	16.52	<.0001	

Example 20.6: The Cigarette Sales Data: Dynamic Panel Estimation with GMM

In this example, a dynamic panel demand model for cigarette sales is estimated. It illustrates the application of the method described in the section “[Dynamic Panel Estimator](#)” on page 1380. The data are a panel from 46 American states over the period 1963–92. See Baltagi and Levin (1992) and Baltagi (1995) for data description. All variables were transformed by taking the natural logarithm. The data set CIGAR is shown in the following statements.

```
data cigar;
  input state year price pop pop_16 cpi ndi sales pimin;
  label
    state = 'State abbreviation'
    year  = 'YEAR'
    price = 'Price per pack of cigarettes'
    pop   = 'Population'
    pop_16 = 'Population above the age of 16'
    cpi   = 'Consumer price index with (1983=100)'
    ndi   = 'Per capita disposable income'
    sales = 'Cigarette sales in packs per capita'
    pimin = 'Minimum price in adjoining states per pack of cigarettes';
  datalines;
1 63 28.6 3383 2236.5 30.6 1558.3045298 93.9 26.1
1 64 29.8 3431 2276.7 31.0 1684.0732025 95.4 27.5
1 65 29.8 3486 2327.5 31.5 1809.8418752 98.5 28.9
1 66 31.5 3524 2369.7 32.4 1915.1603572 96.4 29.5
1 67 31.6 3533 2393.7 33.4 2023.5463678 95.5 29.6
1 68 35.6 3522 2405.2 34.8 2202.4855362 88.4 32
1 69 36.6 3531 2411.9 36.7 2377.3346665 90.1 32.8
1 70 39.6 3444 2394.6 38.8 2591.0391591 89.8 34.3
1 71 42.7 3481 2443.5 40.5 2785.3159706 95.4 35.8

... more lines ...
```

The following statements sort the data by STATE and YEAR variables.

```
proc sort data=cigar;
  by state year;
run;
```

Next, logarithms of the variables required for regression estimation are calculated, as shown in the following statements:

```
data cigar;
  set cigar;
  lsales = log(sales);
  lprice = log(price);
  lndi   = log(ndi);
  lpimin = log(pimin);
  label lprice = 'Log price per pack of cigarettes';
```

```

label lndi = 'Log per capita disposable income';
label lsales = 'Log cigarette sales in packs per capita';
label lpimin = 'Log minimum price in adjoining states
               per pack of cigarettes';

run;

```

The following statements create the CIGAR_LAG data set with lagged variable for each cross section.

```

proc panel data=cigar;
  id state year;
  clag lsales(1) / out=cigar_lag;
run;

data cigar_lag;
  set cigar_lag;
  label lsales_1 = 'Lagged log cigarette sales in packs per capita';
run;

```

Finally, the model is estimated by a two step GMM method. Five lags (MAXBAND=5) of the dependent variable are used as instruments. NOLEVELS options is specified to avoid use of level equations, as shown in the following statements:

```

proc panel data=cigar_lag;
  inst depvar;
  model lsales = lsales_1 lprice lndi lpimin
    / gmm nolevels twostep maxband=5 noint;
  id state year;
run;

```

Output 20.6.1 Estimation with GMM

The PANEL Procedure			
GMM: First Differences Transformation			
Dependent Variable: lsales Log cigarette sales in packs per capita			
Model Description			
Estimation Method	GMMTWO		
Number of Cross Sections	46		
Time Series Length	30		
Estimate Stage	2		
Maximum Number of Time Periods (MAXBAND)	5		
Fit Statistics			
SSE	2187.5988	DFE	1284
MSE	1.7037	Root MSE	1.3053

Output 20.6.1 *continued*

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Pr > t
lsales_1	1	0.572219	0.00665	86.03	<.0001
lprice	1	-0.23464	0.0208	-11.29	<.0001
lndi	1	0.232673	0.00266	87.54	<.0001
lpimin	1	-0.08299	0.0223	-3.73	0.0002

If the theory suggests that there are other valid instruments, PREDETERMINED, EXOGENOUS and CORRELATED options can also be used.

References

- Arellano, M. (1987), "Computing Robust Standard Errors for Within-Groups Estimators," *Oxford Bulletin of Economics and Statistics*, 49, 431-434.
- Arellano, M. and Bond, S. (1991), "Some Tests of Specification for Panel Data: Monte Carlo Evidence and an Application to Employment Equations," *The Review of Economic Studies*, 58(2), 277-297.
- Arellano, M. and Bover, O. (1995), "Another Look at the Instrumental Variable Estimation of Error-Components Models," *Journal of Econometrics*, 68(1), 29-51.
- Baltagi, B. H. (1995), *Econometric Analysis of Panel Data*, New York: John Wiley & Sons.
- Baltagi, B. H. and Chang, Y. (1994), "Incomplete Panels: A Comparative Study of Alternative Estimators for the Unbalanced One-Way Error Component Regression Model," *Journal of Econometrics*, 62(2), 67-89.
- Baltagi, B. H. and D. Levin (1992), "Cigarette Taxation: Raising Revenues and Reducing Consumption," *Structural Change and Economic Dynamics*, 3, 321-335.
- Baltagi, B. H., Song, Seuck H., and Jung, Byoung C. (2002), "A Comparative Study of Alternative Estimators for the Unbalanced Two-Way Error Component Regression Model," *Econometrics Journal*, 5, 480-493.
- Breusch, T. S. and Pagan, A. R. (1980), "The Lagrange Multiplier Test and Its Applications to Model Specification in Econometrics," *The Review of Economic Studies*, 47:1, 239-253.
- Buse, A. (1973), "Goodness of Fit in Generalized Least Squares Estimation," *American Statistician*, 27, 106-108.
- Davidson, R. and MacKinnon, J. G. (1993), *Estimation and Inference in Econometrics*, New York: Oxford University Press.
- Da Silva, J. G. C. (1975), "The Analysis of Cross-Sectional Time Series Data," Ph.D. dissertation, Department of Statistics, North Carolina State University.

- Davis, Peter (2002), "Estimating Multi-Way Error Components Models with Unbalanced Data Structures," *Journal of Econometrics*, 106:1, 67-95.
- Feige, E. L. (1964), *The Demand for Liquid Assets: A Temporal Cross-Section Analysis*, Englewood Cliffs: Prentice-Hall.
- Feige, E. L. and Swamy, P. A. V. (1974), "A Random Coefficient Model of the Demand for Liquid Assets," *Journal of Money, Credit, and Banking*, 6, 241-252.
- Fuller, W. A. and Battese, G. E. (1974), "Estimation of Linear Models with Crossed-Error Structure," *Journal of Econometrics*, 2, 67-78.
- Greene, W. H. (1990), *Econometric Analysis*, First Edition, New York: Macmillan Publishing Company.
- Greene, W. H. (2000), *Econometric Analysis*, Fourth Edition, New York: Macmillan Publishing Company.
- Hausman, J. A. (1978), "Specification Tests in Econometrics," *Econometrica*, 46, 1251-1271.
- Hausman, J. A. and Taylor, W. E. (1982), "A Generalized Specification Test," *Economics Letters*, 8, 239-245.
- Hsiao, C. (1986), *Analysis of Panel Data*, Cambridge: Cambridge University Press.
- Judge, G. G., Griffiths, W. E., Hill, R. C., Lutkepohl, H., and Lee, T. C. (1985), *The Theory and Practice of Econometrics*, Second Edition, New York: John Wiley & Sons.
- Kmenta, J. (1971), *Elements of Econometrics*, Ann Arbor: The University of Michigan Press.
- Lamotte, L. R. (1994), "A Note on the Role of Independence in t Statistics Constructed from Linear Statistics in Regression Models," *The American Statistician*, 48:3, 238-240.
- Maddala, G. S. (1977), *Econometrics*, New York: McGraw-Hill Co.
- Parks, R. W. (1967), "Efficient Estimation of a System of Regression Equations When Disturbances Are Both Serially and Contemporaneously Correlated," *Journal of the American Statistical Association*, 62, 500-509.
- SAS Institute Inc. (1979), *SAS Technical Report S-106, PANEL: A SAS Procedure for the Analysis of Time-Series Cross-Section Data*, Cary, NC: SAS Institute Inc.
- Searle S. R. (1971), "Topics in Variance Component Estimation," *Biometrics*, 26, 1-76.
- Seely, J. (1969), "Estimation in Finite-Dimensional Vector Spaces with Application to the Mixed Linear Model," Ph.D. dissertation, Department of Statistics, Iowa State University.
- Seely, J. (1970a), "Linear Spaces and Unbiased Estimation," *Annals of Mathematical Statistics*, 41, 1725-1734.
- Seely, J. (1970b), "Linear Spaces and Unbiased Estimation—Application to the Mixed Linear Model," *Annals of Mathematical Statistics*, 41, 1735-1748.
- Seely, J. and Soong, S. (1971), "A Note on MINQUE's and Quadratic Estimability," Corvallis, Oregon:

Oregon State University.

Seely, J. and Zyskind, G. (1971), "Linear Spaces and Minimum Variance Unbiased Estimation," *Annals of Mathematical Statistics*, 42, 691-703.

Theil, H. (1961), *Economic Forecasts and Policy*, Second Edition, Amsterdam: North-Holland, 435-437.

Wansbeek, T., and Kapteyn, Arie (1989), "Estimation of the Error-Components Model with Incomplete Panels," *Journal of Econometrics*, 41, 341-361.

White, H. (1980), "A Heteroscedasticity-Consistent Covariance Matrix Estimator and a Direct Test for Heteroscedasticity," *Econometrica*, 48, 817-838.

Wu, D. M. (1973), "Alternative Tests of Independence between Stochastic Regressors and Disturbances," *Econometrica*, 41(4), 733-750.

Zellner, A. (1962), "An Efficient Method of Estimating Seemingly Unrelated Regressions and Tests for Aggregation Bias," *Journal of the American Statistical Association*, 57, 348-368.

Chapter 21

The PDLREG Procedure

Contents

Overview: PDLREG Procedure	1423
Getting Started: PDLREG Procedure	1424
Introductory Example	1425
Syntax: PDLREG Procedure	1427
Functional Summary	1428
PROC PDLREG Statement	1429
BY Statement	1430
MODEL Statement	1430
OUTPUT Statement	1432
RESTRICT Statement	1434
Details: PDLREG Procedure	1435
Missing Values	1435
Polynomial Distributed Lag Estimation	1436
Autoregressive Error Model Estimation	1437
OUT= Data Set	1437
Printed Output	1437
ODS Graphics	1438
Examples: PDLREG Procedure	1439
Example 21.1: Industrial Conference Board Data	1439
Example 21.2: Money Demand Model	1443
References	1447

Overview: PDLREG Procedure

The PDLREG procedure estimates regression models for time series data in which the effects of some of the regressor variables are distributed across time. The distributed lag model assumes that the effect of an input variable X on an output Y is distributed over time. If you change the value of X at time t , Y will experience some immediate effect at time t , and it will also experience a delayed effect at times $t + 1$, $t + 2$, and so on up to time $t + p$ for some limit p .

The regression model supported by PROC PDLREG can include any number of regressors with distribution lags and any number of covariates. (Simple regressors without lag distributions are called covariates.) For example, the two-regressor model with a distributed lag effect for one regressor is written

$$y_t = \alpha + \sum_{i=0}^p \beta_i x_{t-i} + \gamma z_t + u_t$$

Here, x_t is the regressor with a distributed lag effect, z_t is a simple covariate, and u_t is an error term.

The distribution of the lagged effects is modeled by Almon lag polynomials. The coefficients b_i of the lagged values of the regressor are assumed to lie on a polynomial curve. That is,

$$b_i = \alpha_0^* + \sum_{j=1}^d \alpha_j^* i^j$$

where $d(\leq p)$ is the degree of the polynomial. For the numerically efficient estimation, the PDLREG procedure uses *orthogonal polynomials*. The preceding equation can be transformed into orthogonal polynomials:

$$b_i = \alpha_0 + \sum_{j=1}^d \alpha_j f_j(i)$$

where $f_j(i)$ is a polynomial of degree j in the lag length i , and α_j is a coefficient estimated from the data.

The PDLREG procedure supports endpoint restrictions for the polynomial. That is, you can constrain the estimated polynomial lag distribution curve so that $b_{-1} = 0$ or $b_{p+1} = 0$, or both. You can also impose linear restrictions on the parameter estimates for the covariates.

You can specify a minimum degree and a maximum degree for the lag distribution polynomial, and the procedure fits polynomials for all degrees in the specified range. (However, if distributed lags are specified for more than one regressor, you can specify a range of degrees for only one of them.)

The PDLREG procedure can also test for autocorrelated residuals and perform autocorrelated error correction by using the autoregressive error model. You can specify any order autoregressive error model and can specify several different estimation methods for the autoregressive model, including exact maximum likelihood.

The PDLREG procedure computes generalized Durbin-Watson statistics to test for autocorrelated residuals. For models with lagged dependent variables, the procedure can produce Durbin h and Durbin t statistics. You can request significance level p -values for the Durbin-Watson, Durbin h , and Durbin t statistics. See Chapter 8, “[The AUTOREG Procedure](#),” for details about these statistics.

The PDLREG procedure assumes that the input observations form a time series. Thus, the PDLREG procedure should be used only for ordered and equally spaced time series data.

Getting Started: PDLREG Procedure

Use the MODEL statement to specify the regression model. The PDLREG procedure’s MODEL statement is written like MODEL statements in other SAS regression procedures, except that a regressor can be followed by a lag distribution specification enclosed in parentheses.

For example, the following MODEL statement regresses Y on X and Z and specifies a distributed lag for X:

```
model y = x(4,2) z;
```

The notation X(4,2) specifies that the model includes X and 4 lags of X, with the coefficients of X and its lags constrained to follow a second-degree (quadratic) polynomial. Thus, the regression model specified by this MODEL statement is

$$y_t = a + b_0x_t + b_1x_{t-1} + b_2x_{t-2} + b_3x_{t-3} + b_4x_{t-4} + cz_t + u_t$$

$$b_i = \alpha_0 + \alpha_1 f_1(i) + \alpha_2 f_2(i)$$

where $f_1(i)$ is a polynomial of degree 1 in i and $f_2(i)$ is a polynomial of degree 2 in i .

Lag distribution specifications are enclosed in parentheses and follow the name of the regressor variable. The general form of the lag distribution specification is

regressor-name (length, degree, minimum-degree, end-constraint)

where

<i>length</i>	is the length of the lag distribution—that is, the number of lags of the regressor to use.
<i>degree</i>	is the degree of the distribution polynomial.
<i>minimum-degree</i>	is an optional minimum degree for the distribution polynomial.
<i>end-constraint</i>	is an optional endpoint restriction specification, which can have the value FIRST, LAST, or BOTH.

If the *minimum-degree* option is specified, the PDLREG procedure estimates models for all degrees between *minimum-degree* and *degree*.

Introductory Example

The following statements generate simulated data for variables Y and X. Y depends on the first three lags of X, with coefficients .25, .5, and .25. Thus, the effect of changes of X on Y takes effect 25% after one period, 75% after two periods, and 100% after three periods.

```
data test;
  x11 = 0; x12 = 0; x13 = 0;
  do t = -3 to 100;
    x = ranuni(1234);
    y = 10 + .25 * x11 + .5 * x12 + .25 * x13
        + .1 * rannor(1234);
    if t > 0 then output;
    x13 = x12; x12 = x11; x11 = x;
  end;
run;
```

The following statements use the PDLREG procedure to regress Y on a distributed lag of X . The length of the lag distribution is 4, and the degree of the distribution polynomial is specified as 3.

```
proc pdlreg data=test;
    model y = x( 4, 3 );
run;
```

The PDLREG procedure first prints a table of statistics for the residuals of the model, as shown in [Figure 21.1](#). See Chapter 8, “[The AUTOREG Procedure](#),” for an explanation of these statistics.

Figure 21.1 Residual Statistics

The PDLREG Procedure			
Dependent Variable		y	
Ordinary Least Squares Estimates			
SSE	0.86604442	DFE	91
MSE	0.00952	Root MSE	0.09755
SBC	-156.72612	AIC	-169.54786
MAE	0.07761107	AICC	-168.88119
MAPE	0.73971576	HQC	-164.3651
Durbin-Watson	1.9920	Regress R-Square	0.7711
		Total R-Square	0.7711

The PDLREG procedure next prints a table of parameter estimates, standard errors, and t tests, as shown in [Figure 21.2](#).

Figure 21.2 Parameter Estimates

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	10.0030	0.0431	231.87	<.0001
x**0	1	0.4406	0.0378	11.66	<.0001
x**1	1	0.0113	0.0336	0.34	0.7377
x**2	1	-0.4108	0.0322	-12.75	<.0001
x**3	1	0.0331	0.0392	0.84	0.4007

The table in [Figure 21.2](#) shows the model intercept and the estimated parameters of the lag distribution polynomial. The parameter labeled $X^{**}0$ is the constant term, α_0 , of the distribution polynomial. $X^{**}1$ is the linear coefficient, α_1 ; $X^{**}2$ is the quadratic coefficient, α_2 ; and $X^{**}3$ is the cubic coefficient, α_3 .

The parameter estimates for the distribution polynomial are not of interest in themselves. Since the PDLREG procedure does not print the orthogonal polynomial basis that it constructs to represent the distribution polynomial, these coefficient values cannot be interpreted.

However, because these estimates are for an orthogonal basis, you can use these results to test the degree of the polynomial. For example, this table shows that the X^{**3} estimate is not significant; the p -value for its t ratio is 0.4007, while the X^{**2} estimate is highly significant ($p < .0001$). This indicates that a second-degree polynomial might be more appropriate for this data set.

The PDLREG procedure next prints the lag distribution coefficients and a graphical display of these coefficients, as shown in [Figure 21.3](#).

Figure 21.3 Coefficients and Graph of Estimated Lag Distribution

Estimate of Lag Distribution				
Variable	Estimate	Standard Error	t Value	Approx Pr > t
x(0)	-0.040150	0.0360	-1.12	0.2677
x(1)	0.324241	0.0307	10.55	<.0001
x(2)	0.416661	0.0239	17.45	<.0001
x(3)	0.289482	0.0315	9.20	<.0001
x(4)	-0.004926	0.0365	-0.13	0.8929
Estimate of Lag Distribution				
Variable	-0.04			0.4167
x(0)	***			
x(1)		*****		
x(2)		*****		
x(3)		*****		
x(4)				

The lag distribution coefficients are the coefficients of the lagged values of X in the regression model. These coefficients lie on the polynomial curve defined by the parameters shown in [Figure 21.2](#). Note that the estimated values for $X(1)$, $X(2)$, and $X(3)$ are highly significant, while $X(0)$ and $X(4)$ are not significantly different from 0. These estimates are reasonably close to the true values used to generate the simulated data.

The graphical display of the lag distribution coefficients plots the estimated lag distribution polynomial reported in [Figure 21.2](#). The roughly quadratic shape of this plot is another indication that a third-degree distribution curve is not needed for this data set.

Syntax: PDLREG Procedure

The following statements can be used with the PDLREG procedure:

```

PROC PDLREG option ;
  BY variables ;
  MODEL dependents = effects / options ;
  OUTPUT OUT= SAS-data-set keyword = variables ;
  RESTRICT restrictions ;

```

Functional Summary

The statements and options used with the PDLREG procedure are summarized in the following table.

Table 21.1 PDLREG Functional Summary

Description	Statement	Option
Data Set Options		
specify the input data set	PDLREG	DATA=
write predicted values to an output data set	OUTPUT	OUT=
BY-Group Processing		
specify BY-group processing	BY	
Printing Control Options		
request all print options	MODEL	ALL
print transformed coefficients	MODEL	COEF
print correlations of the estimates	MODEL	CORRB
print covariances of the estimates	MODEL	COVB
print DW statistics up to order <i>j</i>	MODEL	DW= <i>j</i>
print the marginal probability of DW statistics	MODEL	DWPROB
print inverse of Toeplitz matrix	MODEL	GINV
print inverse of the crossproducts matrix	MODEL	I
print details at each iteration step	MODEL	ITPRINT
print Durbin <i>t</i> statistic	MODEL	LAGDEP
print Durbin <i>h</i> statistic	MODEL	LAGDEP=
suppress printed output	MODEL	NOPRINT
print partial autocorrelations	MODEL	PARTIAL
print standardized parameter estimates	MODEL	STB
print crossproducts matrix	MODEL	XPX
Model Estimation Options		
specify order of autoregressive process	MODEL	NLAG=
suppress intercept parameter	MODEL	NOINT
specify convergence criterion	MODEL	CONVERGE=
specify maximum number of iterations	MODEL	MAXITER=
specify estimation method	MODEL	METHOD=
Output Control Options		
specify confidence limit size	OUTPUT	ALPHACLI=
specify confidence limit size for structural predicted values	OUTPUT	ALPHACLM=
output transformed intercept variable	OUTPUT	CONSTANT=

Table 21.1 *continued*

Description	Statement	Option
output lower confidence limit for predicted values	OUTPUT	LCL=
output lower confidence limit for structural predicted values	OUTPUT	LCLM=
output predicted values	OUTPUT	P=
output predicted values of the structural part	OUTPUT	PM=
output residuals from the predicted values	OUTPUT	R=
output residuals from the structural predicted values	OUTPUT	RM=
output transformed variables	OUTPUT	TRANSFORM=
output upper confidence limit for the predicted values	OUTPUT	UCL=
output upper confidence limit for the structural predicted values	OUTPUT	UCLM=

PROC PDLREG Statement

PROC PDLREG *option* ;

The PROC PDLREG statement has the following option:

DATA= *SAS-data-set*

specifies the name of the SAS data set containing the input data. If you do not specify the DATA= option, the most recently created SAS data set is used.

In addition, you can place any of the following MODEL statement options in the PROC PDLREG statement, which is equivalent to specifying the option for every MODEL statement: ALL, COEF, CONVERGE=, CORRB, COVB, DW=, DWPROB, GINV, ITPRINT, MAXITER=, METHOD=, NOINT, NOPRINT, and PARTIAL.

BY Statement

BY *variables* ;

A BY statement can be used with PROC PDLREG to obtain separate analyses on observations in groups defined by the BY variables.

MODEL Statement

MODEL *dependent = effects / options* ;

The MODEL statement specifies the regression model. The keyword MODEL is followed by the dependent variable name, an equal sign, and a list of independent effects. Only one MODEL statement is allowed.

Every variable in the model must be a numeric variable in the input data set. Specify an independent effect with a variable name optionally followed by a polynomial lag distribution specification.

Specifying Independent Effects

The general form of an effect is

variable (*length*, *degree*, *minimum-degree*, *constraint*)

The term in parentheses following the variable name specifies a polynomial distributed lag (PDL) for the variable. The PDL specification is as follows:

<i>length</i>	specifies the number of lags of the variable to include in the lag distribution.
<i>degree</i>	specifies the maximum degree of the distribution polynomial. If not specified, the degree defaults to the lag length.
<i>minimum-degree</i>	specifies the minimum degree of the polynomial. By default <i>minimum-degree</i> is the same as <i>degree</i> .
<i>constraint</i>	specifies endpoint restrictions on the polynomial. The value of <i>constraint</i> can be FIRST, LAST, or BOTH. If a value is not specified, there are no endpoint restrictions.

If you do not specify the *degree* or *minimum-degree* parameter, but you do specify endpoint restrictions, you must use commas to show which parameter, *degree* or *minimum-degree*, is left out.

MODEL Statement Options

The following options can appear in the MODEL statement after a slash (/).

ALL

prints all the matrices computed during the analysis of the model.

COEF

prints the transformation coefficients for the first p observations. These coefficients are formed from a scalar multiplied by the inverse of the Cholesky root of the Toeplitz matrix of autocovariances.

CORRB

prints the matrix of estimated correlations between the parameter estimates.

COVB

prints the matrix of estimated covariances between the parameter estimates.

DW= j

prints the generalized Durbin-Watson statistics up to the order of j . The default is DW=1. When you specify the LAGDEP or LAGDEP=*name* option, the Durbin-Watson statistic is not printed unless you specify the DW= option.

DWPROB

prints the marginal probability of the Durbin-Watson statistic.

CONVERGE= *value*

sets the convergence criterion. If the maximum absolute value of the change in the autoregressive parameter estimates between iterations is less than this amount, then convergence is assumed. The default is CONVERGE=.001.

GINV

prints the inverse of the Toeplitz matrix of autocovariances for the Yule-Walker solution.

I

prints $(\mathbf{X}'\mathbf{X})^{-1}$, the inverse of the crossproducts matrix for the model; or, if restrictions are specified, it prints $(\mathbf{X}'\mathbf{X})^{-1}$ adjusted for the restrictions.

ITPRINT

prints information on each iteration.

LAGDEP**LAGDV**

prints the t statistic for testing residual autocorrelation when regressors contain lagged dependent variables.

LAGDEP= *name***LAGDV= *name***

prints the Durbin h statistic for testing the presence of first-order autocorrelation when regressors contain the lagged dependent variable whose name is specified as LAGDEP=*name*. When the h statistic cannot be computed, the asymptotically equivalent t statistic is given.

MAXITER= *number*

sets the maximum number of iterations allowed. The default is MAXITER=50.

METHOD= *value*

specifies the type of estimates for the autoregressive component. The values of the METHOD= option are as follows:

METHOD=ML	specifies the maximum likelihood method.
METHOD=ULS	specifies unconditional least squares.
METHOD=YW	specifies the Yule-Walker method.
METHOD=ITYW	specifies iterative Yule-Walker estimates.

The default is METHOD=ML if you specified the LAGDEP or LAGDEP= option; otherwise, METHOD=YW is the default.

NLAG= *m***NLAG=** (*number-list*)

specifies the order of the autoregressive process or the subset of autoregressive lags to be fit. If you do not specify the NLAG= option, PROC PDLREG does not fit an autoregressive model.

NOINT

suppresses the intercept parameter from the model.

NOPRINT

suppresses the printed output.

PARTIAL

prints partial autocorrelations if the NLAG= option is specified.

STB

prints standardized parameter estimates. Sometimes known as a standard partial regression coefficient, a *standardized parameter estimate* is a parameter estimate multiplied by the standard deviation of the associated regressor and divided by the standard deviation of the regressed variable.

XPX

prints the crossproducts matrix, $\mathbf{X}'\mathbf{X}$, used for the model. \mathbf{X} refers to the transformed matrix of regressors for the regression.

OUTPUT Statement

OUTPUT *OUT= SAS-data-set keyword= option ... ;*

The OUTPUT statement creates an output SAS data set with variables as specified by the following keyword options. See the section “Predicted Values” in Chapter 8, “[The AUTOREG Procedure](#),” for a description of the associated computations for these options.

ALPHACLI= *number*

sets the confidence limit size for the estimates of future values of the current realization of the response time series to *number*, where *number* is less than one and greater than zero. The resulting confidence

interval has 1-*number* confidence. The default value for *number* is 0.05, corresponding to a 95% confidence interval.

ALPHACL= *number*

sets the confidence limit size for the estimates of the structural or regression part of the model to *number*, where *number* is less than one and greater than zero. The resulting confidence interval has 1-*number* confidence. The default value for *number* is 0.05, corresponding to a 95% confidence interval.

OUT= *SAS-data-set*

names the output data.

The following specifications are of the form *KEYWORD=names*, where *KEYWORD=* specifies the statistic to include in the output data set and *names* gives names to the variables that contain the statistics.

CONSTANT= *variable*

writes the transformed intercept to the output data set.

LCL= *name*

requests that the lower confidence limit for the predicted value (specified in the *PREDICTED=* option) be added to the output data set under the name given.

LCLM= *name*

requests that the lower confidence limit for the structural predicted value (specified in the *PREDICTEDM=* option) be added to the output data set under the name given.

PREDICTED= *name*

P= *name*

stores the predicted values in the output data set under the name given.

PREDICTEDM= *name*

PM= *name*

stores the structural predicted values in the output data set under the name given. These values are formed from only the structural part of the model.

RESIDUAL= *name*

R= *name*

stores the residuals from the predicted values based on both the structural and time series parts of the model in the output data set under the name given.

RESIDUALM= *name*

RM= *name*

requests that the residuals from the structural prediction be given.

TRANSFORM= *variables*

requests that the specified variables from the input data set be transformed by the autoregressive model and put in the output data set. If you need to reproduce the data suitable for reestimation, you must also transform an intercept variable. To do this, transform a variable that only takes the value 1 or use the *CONSTANT=* option.

UCL= *name*

stores the upper confidence limit for the predicted value (specified in the PREDICTED= option) in the output data set under the name given.

UCLM= *name*

stores the upper confidence limit for the structural predicted value (specified in the PREDICTEDM= option) in the output data set under the name given.

For example, the SAS statements

```
proc pdlreg data=a;
  model y=x1 x2;
  output out=b p=yhat r=resid;
run;
```

create an output data set named B. In addition to the input data set variables, the data set B contains the variable YHAT, whose values are predicted values of the dependent variable Y, and RESID, whose values are the residual values of Y.

RESTRICT Statement

RESTRICT *equation* , . . . , *equation* ;

The RESTRICT statement places restrictions on the parameter estimates for covariates in the preceding MODEL statement. A parameter produced by a distributed lag cannot be restricted with the RESTRICT statement.

Each restriction is written as a linear equation. If you specify more than one restriction in a RESTRICT statement, the restrictions are separated by commas.

You can refer to parameters by the name of the corresponding regressor variable. Each name used in the equation must be a regressor in the preceding MODEL statement. Use the keyword INTERCEPT to refer to the intercept parameter in the model.

RESTRICT statements can be given labels. You can use labels to distinguish results for different restrictions in the printed output. Labels are specified as follows:

label : **RESTRICT** . . .

The following is an example of the use of the RESTRICT statement, in which the coefficients of the regressors X1 and X2 are required to sum to 1:

```
proc pdlreg data=a;
  model y = x1 x2;
  restrict x1 + x2 = 1;
run;
```

Parameter names can be multiplied by constants. When no equal sign appears, the linear combination is set equal to 0. Note that the parameters associated with the variables are restricted, not the variables themselves. Here are some examples of valid RESTRICT statements:

```
restrict x1 + x2 = 1;
restrict x1 + x2 - 1;
restrict 2 * x1 = x2 + x3 , intercept + x4 = 0;
restrict x1 = x2 = x3 = 1;
restrict 2 * x1 - x2;
```

Restricted parameter estimates are computed by introducing a Lagrangian parameter λ for each restriction (Pringle and Rayner 1971). The estimates of these Lagrangian parameters are printed in the parameter estimates table. If a restriction cannot be applied, its parameter value and degrees of freedom are listed as 0.

The Lagrangian parameter, λ , measures the sensitivity of the SSE to the restriction. If the restriction is changed by a small amount ϵ , the SSE is changed by $2\lambda\epsilon$.

The t ratio tests the significance of the restrictions. If λ is zero, the restricted estimates are the same as the unrestricted ones.

You can specify any number of restrictions in a RESTRICT statement, and you can use any number of RESTRICT statements. The estimates are computed subject to all restrictions specified. However, restrictions should be consistent and not redundant.

Details: PDLREG Procedure

Missing Values

The PDLREG procedure skips any observations at the beginning of the data set that have missing values. The procedure uses all observations with nonmissing values for all the independent and dependent variables such that the lag distribution has sufficient nonmissing lagged independent variables.

Polynomial Distributed Lag Estimation

The simple finite distributed lag model is expressed in the form

$$y_t = \alpha + \sum_{i=0}^p \beta_i x_{t-i} + \epsilon_t$$

When the lag length (p) is long, severe multicollinearity can occur. Use the Almon or *polynomial distributed lag* model to avoid this problem, since the relatively low-degree d ($\leq p$) polynomials can capture the true lag distribution. The lag coefficient can be written in the Almon polynomial lag

$$\beta_i = \alpha_0^* + \sum_{j=1}^d \alpha_j^* i^j$$

Emerson (1968) proposed an efficient method of constructing orthogonal polynomials from the preceding polynomial equation as

$$\beta_i = \alpha_0 + \sum_{j=1}^d \alpha_j f_j(i)$$

where $f_j(i)$ is a polynomial of degree j in the lag length i . The polynomials $f_j(i)$ are chosen so that they are orthogonal:

$$\sum_{i=1}^n w_i f_j(i) f_k(i) = \begin{cases} 1 & \text{if } j = k \\ 0 & \text{if } j \neq k \end{cases}$$

where w_i is the weighting factor, and $n = p + 1$. PROC PDLREG uses the equal weights ($w_i = 1$) for all i . To construct the orthogonal polynomials, the following recursive relation is used:

$$f_j(i) = (A_j i + B_j) f_{j-1}(i) - C_j f_{j-2}(i) \quad j = 1, \dots, d$$

The constants A_j , B_j , and C_j are determined as follows:

$$\begin{aligned} A_j &= \left\{ \sum_{i=1}^n w_i i^2 f_{j-1}^2(i) - \left(\sum_{i=1}^n w_i i f_{j-1}^2(i) \right)^2 \right. \\ &\quad \left. - \left(\sum_{i=1}^n w_i i f_{j-1}(i) f_{j-2}(i) \right)^2 \right\}^{-1/2} \\ B_j &= -A_j \sum_{i=1}^n w_i i f_{j-1}^2(i) \\ C_j &= A_j \sum_{i=1}^n w_i i f_{j-1}(i) f_{j-2}(i) \end{aligned}$$

where $f_{-1}(i) = 0$ and $f_0(i) = 1/\sqrt{\sum_{i=1}^n w_i}$.

PROC PDLREG estimates the orthogonal polynomial coefficients, $\alpha_0, \dots, \alpha_d$, to compute the coefficient estimate of each independent variable (X) with distributed lags. For example, if an independent variable is specified as X(9,3), a third-degree polynomial is used to specify the distributed lag coefficients. The third-degree polynomial is fit as a constant term, a linear term, a quadratic term, and a cubic term. The four terms are constructed to be orthogonal. In the output produced by the PDLREG procedure for this case, parameter estimates with names X**0, X**1, X**2, and X**3 correspond to $\hat{\alpha}_0, \hat{\alpha}_1, \hat{\alpha}_2$, and $\hat{\alpha}_3$, respectively. A test using the t statistic and the approximate p -value (“Approx Pr > | t |”) associated with X**3 can determine whether a second-degree polynomial rather than a third-degree polynomial is appropriate. The estimates of the 10 lag coefficients associated with the specification X(9,3) are labeled X(0), X(1), X(2), X(3), X(4), X(5), X(6), X(7), X(8), and X(9).

Autoregressive Error Model Estimation

The PDLREG procedure uses the same autoregressive error model estimation methods as the AUTOREG procedure. These two procedures share the same computational resources for computing estimates. See Chapter 8, “[The AUTOREG Procedure](#),” for details about estimation methods for autoregressive error models.

OUT= Data Set

The OUT= data set produced by the PDLREG procedure’s OUTPUT statement is similar in form to the OUT= data set produced by the AUTOREG procedure. See Chapter 8, “[The AUTOREG Procedure](#),” for details on the OUT= data set.

Printed Output

The PDLREG procedure prints the following items:

1. the name of the dependent variable
2. the ordinary least squares (OLS) estimates
3. the estimates of autocorrelations and of the autocovariance, and if line size permits, a graph of the autocorrelation at each lag. The autocorrelation for lag 0 is 1. These items are printed if you specify the NLAG= option.
4. the partial autocorrelations if the PARTIAL and NLAG= options are specified. The first partial autocorrelation is the autocorrelation for lag 1.

5. the preliminary mean square error, which results from solving the Yule-Walker equations if you specify the NLAG= option
6. the estimates of the autoregressive parameters, their standard errors, and the ratios of estimates to standard errors (t) if you specify the NLAG= option
7. the statistics of fit for the final model if you specify the NLAG= option. These include the error sum of squares (SSE), the degrees of freedom for error (DFE), the mean square error (MSE), the root mean square error (Root MSE), the mean absolute error (MAE), the mean absolute percentage error (MAPE), the Schwarz information criterion (SBC), the Akaike's information criterion (AIC), Akaike's information criterion corrected (AICC), the regression R^2 (Regress R-Square), the total R^2 (Total R-Square), and the Durbin-Watson statistic (Durbin-Watson). See Chapter 8, “[The AUTOREG Procedure](#),” for details of the regression R^2 and the total R^2 .
8. the parameter estimates for the structural model (B), a standard error estimate, the ratio of estimate to standard error (t), and an approximation to the significance probability for the parameter being 0 (“Approx Pr > $|t|$ ”)
9. a plot of the lag distribution (estimate of lag distribution)
10. the covariance matrix of the parameter estimates if the COVB option is specified

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User's Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

PROC PDLREG assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 21.2 ODS Tables Produced in PROC PDLREG

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ARParameterEstimates	Estimates of autoregressive parameters	NLAG=
CholeskyFactor	Cholesky root of gamma	NLAG= and ALL
Coefficients	Coefficients for first NLAG observations	NLAG= and (COEF or ALL)
ConvergenceStatus	Convergence status table	default

Table 21.2 *continued*

ODS Table Name	Description	Option
CorrB	Correlation of parameter estimates	CORRB
CorrGraph	Estimates of autocorrelations	NLAG=
CovB	Covariance of parameter estimates	COVB
DependenceEquations	Linear dependence equation	
Dependent	Dependent variable	default
DWTest	Durbin-Watson statistics	DW=
DWTestProb	Durbin-Watson statistics and p -values	DW= DWPROB
ExpAutocorr	Expected autocorrelations	{NLAG= and (COEF or ALL)} or {NLAG=($l_1 \dots l_m$) where $l_m > m$ }
FitSummary	Summary of regression	default
GammaInverse	Gamma inverse	NLAG= and (GINV or ALL)
IterHistory	Iteration history	ITPRINT
LagDist	Lag distribution	default
ParameterEstimates	Parameter estimates	default
ParameterEstimatesGivenAR	Parameter estimates assuming AR parameters are given	NLAG=
PartialAutoCorr	Partial autocorrelation	PARTIAL
PreMSE	Preliminary MSE	NLAG=
XPXIMatrix	$(\mathbf{X}'\mathbf{X})^{-1}$ matrix	XPX
XPXMatrix	$\mathbf{X}'\mathbf{X}$ matrix	XPX
YWIterSSE	Yule-Walker iteration sum of squared error	METHOD=ITYW
ODS Tables Created by the RESTRICT Statement		
Restrict	Restriction table	default

Examples: PDLREG Procedure

Example 21.1: Industrial Conference Board Data

In this example, a second-degree Almon polynomial lag model is fit to a model with a five-period lag, and dummy variables are used for quarter effects. The PDL model is estimated using capital appropriations data series for the period 1952 to 1967. The estimation model is written

$$CE_t = a_0 + b_1 Q1_t + b_2 Q2_t + b_3 Q3_t \\ + c_0 CA_t + c_1 CA_{t-1} + \dots + c_5 CA_{t-5}$$

where CE represents capital expenditures and CA represents capital appropriations.

```

title 'National Industrial Conference Board Data';
title2 'Quarterly Series - 1952Q1 to 1967Q4';

data a;
  input ce ca @@;
  qtr = mod( _n_-1, 4 ) + 1;
  q1  = qtr=1;
  q2  = qtr=2;
  q3  = qtr=3;
datalines;

... more lines ...

proc pdlreg data=a;
  model ce = q1 q2 q3 ca(5,2) / dwprob;
run;

```

The printed output produced by the PDLREG procedure is shown in [Output 21.1.1](#). The small Durbin-Watson test indicates autoregressive errors.

Output 21.1.1 Printed Output Produced by PROC PDLREG

National Industrial Conference Board Data			
Quarterly Series - 1952Q1 to 1967Q4			
The PDLREG Procedure			
Dependent Variable		ce	
Ordinary Least Squares Estimates			
SSE	1205186.4	DFE	48
MSE	25108	Root MSE	158.45520
SBC	733.84921	AIC	719.797878
MAE	107.777378	AICC	722.180856
MAPE	3.71653891	HQC	725.231641
Durbin-Watson	0.6157	Regress R-Square	0.9834
		Total R-Square	0.9834

Output 21.1.1 *continued*

Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	210.0109	73.2524	2.87	0.0061
q1	1	-10.5515	61.0634	-0.17	0.8635
q2	1	-20.9887	59.9386	-0.35	0.7277
q3	1	-30.4337	59.9004	-0.51	0.6137
ca**0	1	0.3760	0.007318	51.38	<.0001
ca**1	1	0.1297	0.0251	5.16	<.0001
ca**2	1	0.0247	0.0593	0.42	0.6794

Estimate of Lag Distribution				
Variable	Estimate	Standard Error	t Value	Approx Pr > t
ca(0)	0.089467	0.0360	2.49	0.0165
ca(1)	0.104317	0.0109	9.56	<.0001
ca(2)	0.127237	0.0255	5.00	<.0001
ca(3)	0.158230	0.0254	6.24	<.0001
ca(4)	0.197294	0.0112	17.69	<.0001
ca(5)	0.244429	0.0370	6.60	<.0001

Estimate of Lag Distribution				
Variable	0			0.2444
ca(0)	*****			
ca(1)	*****			
ca(2)	*****			
ca(3)	*****			
ca(4)	*****			
ca(5)	*****			

The following statements use the REG procedure to fit the same polynomial distributed lag model. A DATA step computes lagged values of the regressor X, and RESTRICT statements are used to impose the polynomial lag distribution. Refer to Judge et al. (1985, pp. 357–359) for the restricted least squares estimation of the Almon distributed lag model.

```
data b;
  set a;
  ca_1 = lag( ca );
  ca_2 = lag2( ca );
  ca_3 = lag3( ca );
  ca_4 = lag4( ca );
  ca_5 = lag5( ca );
run;

proc reg data=b;
  model ce = q1 q2 q3 ca ca_1 ca_2 ca_3 ca_4 ca_5;
```

```

restrict    - ca + 5*ca_1 - 10*ca_2 + 10*ca_3 - 5*ca_4 +   ca_5;
restrict      ca - 3*ca_1 +  2*ca_2 +  2*ca_3 - 3*ca_4 +   ca_5;
restrict  -5*ca + 7*ca_1 +  4*ca_2 -  4*ca_3 - 7*ca_4 + 5*ca_5;
run;

```

The REG procedure output is shown in [Output 21.1.2](#).

Output 21.1.2 Printed Output Produced by PROC REG

National Industrial Conference Board Data Quarterly Series - 1952Q1 to 1967Q4					
The REG Procedure					
Model: MODEL1					
Dependent Variable: ce					
Analysis of Variance					
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	6	71343377	11890563	473.58	<.0001
Error	48	1205186	25108		
Corrected Total	54	72548564			
Root MSE		158.45520	R-Square	0.9834	
Dependent Mean		3185.69091	Adj R-Sq	0.9813	
Coeff Var		4.97397			
Parameter Estimates					
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t
Intercept	1	210.01094	73.25236	2.87	0.0061
q1	1	-10.55151	61.06341	-0.17	0.8635
q2	1	-20.98869	59.93860	-0.35	0.7277
q3	1	-30.43374	59.90045	-0.51	0.6137
ca	1	0.08947	0.03599	2.49	0.0165
ca_1	1	0.10432	0.01091	9.56	<.0001
ca_2	1	0.12724	0.02547	5.00	<.0001
ca_3	1	0.15823	0.02537	6.24	<.0001
ca_4	1	0.19729	0.01115	17.69	<.0001
ca_5	1	0.24443	0.03704	6.60	<.0001
RESTRICT	-1	623.63242	12697	0.05	0.9614*
RESTRICT	-1	18933	44803	0.42	0.6772*
RESTRICT	-1	10303	18422	0.56	0.5814*
* Probability computed using beta distribution.					

Example 21.2: Money Demand Model

This example estimates the demand for money by using the following dynamic specification:

$$m_t = a_0 + b_0 m_{t-1} + \sum_{i=0}^5 c_i y_{t-i} + \sum_{i=0}^2 d_i r_{t-i} + \sum_{i=0}^3 f_i p_{t-i} + u_t$$

where

m_t = log of real money stock (M1)

y_t = log of real GNP

r_t = interest rate (commercial paper rate)

p_t = inflation rate

c_i, d_i , and f_i ($i > 0$) are coefficients for the lagged variables

The following DATA step reads the data and transforms the real money and real GNP variables using the natural logarithm. Refer to Balke and Gordon (1986) for a description of the data.

```
data a;
  input m1 gnp gdf r @@;
  m    = log( 100 * m1 / gdf );
  lagm = lag( m );
  y     = log( gnp );
  p     = log( gdf / lag( gdf ) );
  date = intnx( 'qtr', '1jan1968'd, _n_-1 );
  format date yyqc6.;
  label m      = 'Real Money Stock (M1)'
        lagm   = 'Lagged Real Money Stock'
        y      = 'Real GNP'
        r      = 'Commercial Paper Rate'
        p      = 'Inflation Rate';
datalines;

... more lines ...
```

Output 21.2.1 shows a partial list of the data set.

Output 21.2.1 Partial List of the Data Set A

National Industrial Conference Board Data Quarterly Series - 1952Q1 to 1967Q4						
Obs	date	m	lagm	y	r	p
1	1968:1	5.44041	.	6.94333	5.58	.
2	1968:2	5.44732	5.44041	6.96226	6.08	0.011513
3	1968:3	5.45815	5.44732	6.97422	5.96	0.008246
4	1968:4	5.46492	5.45815	6.97661	5.96	0.014865
5	1969:1	5.46980	5.46492	6.98855	6.66	0.011005

The regression model is written for the PDLREG procedure with a MODEL statement. The LAGDEP= option is specified to test for the serial correlation in disturbances since regressors contain the lagged dependent variable LAGM.

```

title 'Money Demand Estimation using Distributed Lag Model';
title2 'Quarterly Data - 1968Q2 to 1983Q4';

proc pdlreg data=a;
  model m = lagm y(5,3) r(2, , ,first) p(3,2) / lagdep=lagm;
run;

```

The estimated model is shown in [Output 21.2.2](#) and [Output 21.2.3](#).

Output 21.2.2 Parameter Estimates

Money Demand Estimation using Distributed Lag Model					
Quarterly Data - 1968Q2 to 1983Q4					
The PDLREG Procedure					
Dependent Variable			m		
Real Money Stock (M1)					
Ordinary Least Squares Estimates					
SSE	0.00169815	DFE	48		
MSE	0.0000354	Root MSE	0.00595		
SBC	-404.60169	AIC	-427.4546		
MAE	0.00383648	AICC	-421.83758		
MAPE	0.07051345	HQC	-418.53375		
		Regress R-Square	0.9712		
		Total R-Square	0.9712		
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-0.1407	0.2625	-0.54	0.5943
lagm	1	0.9875	0.0425	23.21	<.0001
y**0	1	0.0132	0.004531	2.91	0.0055
y**1	1	-0.0704	0.0528	-1.33	0.1891
y**2	1	0.1261	0.0786	1.60	0.1154
y**3	1	-0.4089	0.1265	-3.23	0.0022
r**0	1	-0.000186	0.000336	-0.55	0.5816
r**1	1	0.002200	0.000774	2.84	0.0065
r**2	1	0.000788	0.000249	3.16	0.0027
p**0	1	-0.6602	0.1132	-5.83	<.0001
p**1	1	0.4036	0.2321	1.74	0.0885
p**2	1	-1.0064	0.2288	-4.40	<.0001
Restriction	DF	L Value	Standard Error	t Value	Approx Pr > t
r(-1)	-1	0.0164	0.007275	2.26	0.0223

Output 21.2.3 Estimates for Lagged Variables

Estimate of Lag Distribution				
Variable	Estimate	Standard Error	t Value	Approx Pr > t
y(0)	0.268619	0.0910	2.95	0.0049
y(1)	-0.196484	0.0612	-3.21	0.0024
y(2)	-0.163148	0.0537	-3.04	0.0038
y(3)	0.063850	0.0451	1.42	0.1632
y(4)	0.179733	0.0588	3.06	0.0036
y(5)	-0.120276	0.0679	-1.77	0.0827

Estimate of Lag Distribution				
Variable	-0.196	0		0.2686
y(0)			*****	
y(1)		*****		
y(2)		*****		
y(3)			*****	
y(4)			*****	
y(5)		*****		

Estimate of Lag Distribution				
Variable	Estimate	Standard Error	t Value	Approx Pr > t
r(0)	-0.001341	0.000388	-3.45	0.0012
r(1)	-0.000751	0.000234	-3.22	0.0023
r(2)	0.001770	0.000754	2.35	0.0230

Estimate of Lag Distribution				
Variable	-0.001	0		0.0018
r(0)		*****		
r(1)		*****		
r(2)			*****	

Output 21.2.3 *continued*

Estimate of Lag Distribution				
Variable	Estimate	Standard Error	t Value	Approx Pr > t
p(0)	-1.104051	0.2027	-5.45	<.0001
p(1)	0.082892	0.1257	0.66	0.5128
p(2)	0.263391	0.1381	1.91	0.0624
p(3)	-0.562556	0.2076	-2.71	0.0093
Estimate of Lag Distribution				
Variable	-1.104		0	0.2634
p(0)	*****			
p(1)			***	
p(2)			*****	
p(3)		*****		

References

- Balke, N. S. and Gordon, R. J. (1986), “Historical Data,” in R. J. Gordon, ed., *The American Business Cycle*, 781–850, Chicago: The University of Chicago Press.
- Emerson, P. L. (1968), “Numerical Construction of Orthogonal Polynomials from a General Recurrence Formula,” *Biometrics*, 24, 695–701.
- Gallant, A. R. and Goebel, J. J. (1976), “Nonlinear Regression with Autoregressive Errors,” *Journal of the American Statistical Association*, 71, 961–967.
- Harvey, A. C. (1981), *The Econometric Analysis of Time Series*, New York: John Wiley & Sons.
- Johnston, J. (1972), *Econometric Methods*, Second Edition, New York: McGraw-Hill.
- Judge, G. G., Griffiths, W. E., Hill, R. C., Lutkepohl, H., and Lee, T. C. (1985), *The Theory and Practice of Econometrics*, Second Edition, New York: John Wiley & Sons.
- Park, R. E. and Mitchell, B. M. (1980), “Estimating the Autocorrelated Error Model with Trended Data,” *Journal of Econometrics*, 13, 185–201.
- Pringle, R. M. and Rayner, A. A. (1971), *Generalized Inverse Matrices with Applications to Statistics*, New York: Hafner Publishing.

Chapter 22

The QLIM Procedure

Contents

Overview: QLIM Procedure	1450
Getting Started: QLIM Procedure	1451
Introductory Example: Binary Probit and Logit Models	1452
Syntax: QLIM Procedure	1456
Functional Summary	1457
PROC QLIM Statement	1458
BOUNDS Statement	1460
BY Statement	1461
CLASS Statement	1461
ENDOGENOUS Statement	1461
FREQ Statement	1464
HETERO Statement	1464
INIT Statement	1465
MODEL Statement	1466
NLOPTIONS Statement	1467
OUTPUT Statement	1467
RESTRICT Statement	1468
TEST Statement	1469
WEIGHT Statement	1470
Details: QLIM Procedure	1471
Ordinal Discrete Choice Modeling	1471
Limited Dependent Variable Models	1474
Stochastic Frontier Production and Cost Models	1478
Heteroscedasticity and Box-Cox Transformation	1480
Bivariate Limited Dependent Variable Modeling	1482
Selection Models	1483
Multivariate Limited Dependent Models	1485
Tests on Parameters	1485
Output to SAS Data Set	1486
OUTEST= Data Set	1490
Naming	1491
ODS Table Names	1493
Examples: QLIM Procedure	1494
Example 22.1: Ordered Data Modeling	1494

Example 22.2: Tobit Analysis	1497
Example 22.3: Bivariate Probit Analysis	1498
Example 22.4: Sample Selection Model	1499
Example 22.5: Sample Selection Model with Truncation and Censoring	1501
Example 22.6: Types of Tobit Models	1503
Example 22.7: Stochastic Frontier Models	1509
References	1514

Overview: QLIM Procedure

The QLIM (qualitative and limited dependent variable model) procedure analyzes univariate and multivariate limited dependent variable models in which dependent variables take discrete values or dependent variables are observed only in a limited range of values. These models include logit, probit, tobit, selection, and multivariate models. The multivariate model can contain discrete choice and limited endogenous variables in addition to continuous endogenous variables.

The QLIM procedure supports the following models:

- linear regression model with heteroscedasticity
- Box-Cox regression with heteroscedasticity
- probit with heteroscedasticity
- logit with heteroscedasticity
- tobit (censored and truncated) with heteroscedasticity
- bivariate probit
- bivariate tobit
- sample selection and switching regression models
- multivariate limited dependent variables
- stochastic frontier production and cost models

In the linear regression models with heteroscedasticity, the assumption that error variance is constant across observations is relaxed. The QLIM procedure allows for a number of different linear and nonlinear variance specifications. Another way to make the linear model more appropriate to fit the data and reduce skewness is to apply Box-Cox transformation. If the nature of data is such that the dependent variable is discrete and it takes only two possible values, OLS estimates are inconsistent. The QLIM procedure offers probit and logit models to overcome these estimation problems. Assumptions about the error variance can also be relaxed in order to estimate probit or logit with heteroscedasticity.

The QLIM procedure also offers a class of models in which the dependent variable is censored or truncated from below or above or both. When a continuous dependent variable is observed only within a certain range and values outside this range are not available, the QLIM procedure offers a class of models that adjust for truncation. In some cases, the dependent variable is continuous only in a certain range and all values outside this range are reported as being on its boundary. For example, if it is not possible to observe negative values, the value of the dependent variable is reported as equal to zero. Because the data are censored, ordinary least squares (OLS) results are inconsistent, and it cannot be guaranteed that the predicted values from the model fall in the appropriate region.

Most of the models in the QLIM procedure can be extended to accommodate bivariate and multivariate scenarios. The assumption that one variable is observed only if another variable takes on certain values lead to the introduction of sample selection models. If the dependent variables are mutually exclusive and observed only for certain ranges of the selection variable, the sample selection can be extended to include cases of switching regression. Stochastic frontier production and cost models allow for random shocks of the production or cost. They include a systematic positive component in the error term that adjusts for technological or cost inefficiency.

The QLIM procedure uses maximum likelihood methods. Initial starting values for the nonlinear optimizations are typically calculated by OLS.

Getting Started: QLIM Procedure

The QLIM procedure is similar in use to the other regression or simultaneous equations model procedures in the SAS System. For example, the following statements are used to estimate a binary choice model by using the probit probability function:

```
proc qlim data=a;
  model y = x1;
  endogenous y ~ discrete;
run;
```

The response variable, *y*, is numeric and has discrete values. PROC QLIM enables the user to specify the type of endogenous variables in the ENDOGENOUS statement. The binary probit model can be also specified as follows:

```
model y = x1 / discrete;
```

When multiple endogenous variables are specified in the QLIM procedure, these equations are estimated as a system. Multiple endogenous variables can be specified with one MODEL statement in the QLIM procedure when these models have the same exogenous variables:

```
model y1 y2 = x1 x2 / discrete;
```

The preceding specification is equivalent to the following statements:

```
proc qlim data=a;
  model y1 = x1 x2;
  model y2 = x1 x2;
  endogenous y1 y2 ~ discrete;
run;
```

Some equations in multivariate models can be continuous while other equations can be discrete. A bivariate model with a discrete and a continuous equation is specified as follows:

```
proc qlim data=a;
  model y1 = x1 x2;
  model y2 = x3 x4;
  endogenous y1 ~ discrete;
run;
```

The standard tobit model is estimated by specifying the endogenous variable to be truncated or censored. The limits of the dependent variable can be specified with the CENSORED or TRUNCATED option in the ENDOGENOUS or MODEL statement when the data are limited by specific values or variables. For example, the two-limit censored model requires two variables that contain the lower (bottom) and upper (top) bound:

```
proc qlim data=a;
  model y = x1 x2 x3;
  endogenous y ~ censored(lb=bottom ub=top);
run;
```

The bounds can be numbers if they are fixed for all observations in the data set. For example, the standard tobit model can be specified as follows:

```
proc qlim data=a;
  model y = x1 x2 x3;
  endogenous y ~ censored(lb=0);
run;
```

Introductory Example: Binary Probit and Logit Models

The following example illustrates the use of PROC QLIM. The data were originally published by Mroz (1987) and downloaded from Wooldridge (2002). This data set is based on a sample of 753 married white women. The dependent variable is a discrete variable of labor force participation (`lnlf`). Explanatory variables are the number of children ages 5 or younger (`kidslt6`), the number of children ages 6 to 18 (`kidsge6`), the woman's age (`age`), the woman's years of schooling (`educ`), wife's labor experience (`exper`), square of experience (`expersq`), and the family income excluding the wife's wage (`nwifeinc`). The program (with data values omitted) is as follows:

```

/*-- Binary Probit --*/
proc qlim data=mroz;
  model inlf = nwifeinc educ exper expersq
            age kidslt6 kidsge6 / discrete;
run;

```

Results of this analysis are shown in the following four figures. In the first table, shown in [Figure 22.1](#), PROC QLIM provides frequency information about each choice. In this example, 428 women participate in the labor force ($\text{inlf} = 1$).

Figure 22.1 Choice Frequency Summary

Binary Data		
The QLIM Procedure		
Discrete Response Profile of inlf		
Index	Value	Total Frequency
1	0	325
2	1	428

The second table is the estimation summary table shown in [Figure 22.2](#). Included are the number of dependent variables, names of dependent variables, the number of observations, the log-likelihood function value, the maximum absolute gradient, the number of iterations, AIC, and Schwarz criterion.

Figure 22.2 Fit Summary Table of Binary Probit

Model Fit Summary	
Number of Endogenous Variables	1
Endogenous Variable	inlf
Number of Observations	753
Log Likelihood	-401.30219
Maximum Absolute Gradient	0.0000669
Number of Iterations	15
Optimization Method	Quasi-Newton
AIC	818.60439
Schwarz Criterion	855.59691

Goodness-of-fit measures are displayed in [Figure 22.3](#). All measures except McKelvey-Zavoina's definition are based on the log-likelihood function value. The likelihood ratio test statistic has chi-square distribution conditional on the null hypothesis that all slope coefficients are zero. In this example, the likelihood ratio statistic is used to test the hypothesis that $\text{kidslt6} = \text{kidge6} = \text{age} = \text{educ} = \text{exper} = \text{expersq} = \text{nwifeinc} = 0$.

Figure 22.3 Goodness of Fit

Goodness-of-Fit Measures		
Measure	Value	Formula
Likelihood Ratio (R)	227.14	$2 * (\text{LogL} - \text{LogL0})$
Upper Bound of R (U)	1029.7	$- 2 * \text{LogL0}$
Aldrich-Nelson	0.2317	$R / (R+N)$
Cragg-Uhler 1	0.2604	$1 - \exp(-R/N)$
Cragg-Uhler 2	0.3494	$(1 - \exp(-R/N)) / (1 - \exp(-U/N))$
Estrella	0.2888	$1 - (1 - R/U)^{(U/N)}$
Adjusted Estrella	0.2693	$1 - ((\text{LogL} - K) / \text{LogL0})^{(-2/N * \text{LogL0})}$
McFadden's LRI	0.2206	R / U
Veall-Zimmermann	0.4012	$(R * (U+N)) / (U * (R+N))$
McKelvey-Zavoina	0.4025	
N = # of observations, K = # of regressors		

Finally, the parameter estimates and standard errors are shown in [Figure 22.4](#).

Figure 22.4 Parameter Estimates of Binary Probit

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.270077	0.508590	0.53	0.5954
nwifeinc	1	-0.012024	0.004840	-2.48	0.0130
educ	1	0.130905	0.025255	5.18	<.0001
exper	1	0.123348	0.018720	6.59	<.0001
expersq	1	-0.001887	0.000600	-3.14	0.0017
age	1	-0.052853	0.008477	-6.24	<.0001
kidslt6	1	-0.868329	0.118519	-7.33	<.0001
kidsge6	1	0.036005	0.043477	0.83	0.4076

When the error term has a logistic distribution, the binary logit model is estimated. To specify a logistic distribution, add D=LOGIT option as follows:

```

/*-- Binary Logit --*/
proc qlim data=mroz;
  model inlf = nwifeinc educ exper expersq
              age kidslt6 kidsge6 / discrete(d=logit);
run;

```

The estimated parameters are shown in [Figure 22.5](#).

Figure 22.5 Parameter Estimates of Binary Logit

Binary Data					
The QLIM Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.425452	0.860365	0.49	0.6210
nwifeinc	1	-0.021345	0.008421	-2.53	0.0113
educ	1	0.221170	0.043441	5.09	<.0001
exper	1	0.205870	0.032070	6.42	<.0001
expersq	1	-0.003154	0.001017	-3.10	0.0019
age	1	-0.088024	0.014572	-6.04	<.0001
kidslt6	1	-1.443354	0.203575	-7.09	<.0001
kidsge6	1	0.060112	0.074791	0.80	0.4215

The heteroscedastic logit model can be estimated using the HETERO statement. If the variance of the logit model is a function of the family income level excluding wife's income (nwifeinc), the variance can be specified as

$$\text{Var}(\epsilon_i) = \sigma^2 \exp(\gamma * \text{nwifeinc}_i)$$

where σ^2 is normalized to 1 because the dependent variable is discrete. The following SAS statements estimate the heteroscedastic logit model:

```

/*-- Binary Logit with Heteroscedasticity --*/
proc qlim data=mroz;
  model inlf = nwifeinc educ exper expersq
              age kidslt6 kidsge6 / discrete(d=logit);
  hetero inlf ~ nwifeinc / noconst;
run;

```

The parameter estimate, γ , of the heteroscedasticity variable is listed as _H.nwifeinc; see Figure 22.6.

Figure 22.6 Parameter Estimates of Binary Logit with Heteroscedasticity

Binary Data					
The QLIM Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.510445	0.983538	0.52	0.6038
nwifeinc	1	-0.026778	0.012108	-2.21	0.0270
educ	1	0.255547	0.061728	4.14	<.0001
exper	1	0.234105	0.046639	5.02	<.0001
expersq	1	-0.003613	0.001236	-2.92	0.0035
age	1	-0.100878	0.021491	-4.69	<.0001
kidslt6	1	-1.645206	0.311296	-5.29	<.0001
kidsge6	1	0.066941	0.085633	0.78	0.4344
_H.nwifeinc	1	0.013280	0.013606	0.98	0.3291

Syntax: QLIM Procedure

The QLIM procedure is controlled by the following statements:

```

PROC QLIM options ;
BOUNDS bound1 < , bound2 ... > ;
BY variables ;
CLASS variables ;
FREQ variable ;
ENDOGENOUS variables ~ options ;
HETERO dependent variables ~ exogenous variables / options ;
INIT initvalue1 < , initvalue2 ... > ;
MODEL dependent variables = regressors / options ;
NLOPTIONS options ;
OUTPUT options ;
RESTRICT restriction1 < , restriction2 ... > ;
TEST options ;
WEIGHT variable ;

```

At least one MODEL statement is required. If more than one MODEL statement is used, the QLIM procedure estimates a system of models. If a FREQ or WEIGHT statement is specified more than once, the variable specified in the first instance is used. Main effects and higher-order terms can be specified in the MODEL statement, as in the GLM procedure and PROBIT procedure in SAS/STAT. If a CLASS statement is used, it must precede the MODEL statement.

Functional Summary

Table 22.1 summarizes the statements and options used with the QLIM procedure.

Table 22.1 QLIM Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	QLIM	DATA=
Writes parameter estimates to an output data set	QLIM	OUTEST=
Writes predictions to an output data set	OUTPUT	OUT=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies classification variables	CLASS	
Specifies a frequency variable	FREQ	
Specifies a weight variable	WEIGHT	NONNORMALIZE
Printing Control Options		
Requests all printing options	QLIM	PRINTALL
Prints correlation matrix of the estimates	QLIM	CORRB
Prints covariance matrix of the estimates	QLIM	COVB
Prints a summary iteration listing	QLIM	ITPRINT
Suppresses the normal printed output	QLIM	NOPRINT
Options to Control the Optimization Process		
Specifies the optimization method	QLIM	METHOD=
Specifies the optimization options	NLOPTIONS	see Chapter 6, “Non-linear Optimization Methods,”
Sets initial values for parameters	INIT	
Specifies upper and lower bounds for the parameter estimates	BOUNDS	
Specifies linear restrictions on the parameter estimates	RESTRICT	
Model Estimation Options		
Specifies options specific to Box-Cox transformation	MODEL	BOXCOX()
Suppresses the intercept parameter	MODEL	NOINT
Specifies a seed for pseudo-random number generation	QLIM	SEED=
Specifies number of draws for Monte Carlo integration	QLIM	NDRAW=
Specifies method to calculate parameter covariance	QLIM	COVEST=
Endogenous Variable Options		

Table 22.1 *continued*

Description	Statement	Option
Specifies discrete variable	ENDOGENOUS	DISCRETE()
Specifies censored variable	ENDOGENOUS	CENSORED()
Specifies truncated variable	ENDOGENOUS	TRUNCATED()
Specifies variable selection condition	ENDOGENOUS	SELECT()
Specifies stochastic frontier variable	ENDOGENOUS	FRONTIER()
Heteroscedasticity Model Options		
Specifies the function for heteroscedasticity models	HETERO	LINK=
Squares the function for heteroscedasticity models	HETERO	SQUARE
Specifies no constant for heteroscedasticity models	HETERO	NOCONST
Output Control Options		
Outputs predicted values	OUTPUT	PREDICTED
Outputs structured part	OUTPUT	XBETA
Outputs residuals	OUTPUT	RESIDUAL
Outputs error standard deviation	OUTPUT	ERRSTD
Outputs marginal effects	OUTPUT	MARGINAL
Outputs probability for the current response	OUTPUT	PROB
Outputs probability for all responses	OUTPUT	PROBALL
Outputs expected value	OUTPUT	EXPECTED
Outputs conditional expected value	OUTPUT	CONDITIONAL
Outputs inverse Mills ratio	OUTPUT	MILLS
Outputs technical efficiency measures	OUTPUT	TE1
	OUTPUT	TE2
Includes covariances in the OUTEST= data set	QLIM	COVOUT
Includes correlations in the OUTEST= data set	QLIM	CORROUT
Test Request Options		
Requests Wald, Lagrange multiplier, and likelihood ratio tests	TEST	ALL
Requests the WALD test	TEST	WALD
Requests the Lagrange multiplier test	TEST	LM
Requests the likelihood ratio test	TEST	LR

PROC QLIM Statement

PROC QLIM *options* ;

The following options can be used in the PROC QLIM statement.

Data Set Options

DATA=SAS-data-set

specifies the input SAS data set. If the DATA= option is not specified, PROC QLIM uses the most recently created SAS data set.

Output Data Set Options

OUTEST=SAS-data-set

writes the parameter estimates to an output data set.

COVOUT

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

CORROUT

writes the correlation matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

Printing Options

NOPRINT

suppresses the normal printed output but does not suppress error listings. If NOPRINT option is set, then any other print option is turned off.

PRINTALL

turns on all the printing-control options. The options set by PRINTALL are COVB and CORRB.

CORRB

prints the correlation matrix of the parameter estimates.

COVB

prints the covariance matrix of the parameter estimates.

ITPRINT

prints the initial parameter estimates, convergence criteria, and all constraints of the optimization. At each iteration, objective function value, step size, maximum gradient, and slope of search direction are printed as well.

Model Estimation Options

COVEST=covariance-option

specifies the method to calculate the covariance matrix of parameter estimates. The supported covariance types are as follows:

OP specifies the covariance from the outer product matrix.

HESSIAN	specifies the covariance from the inverse Hessian matrix.
QML	specifies the covariance from the outer product and Hessian matrices (the quasi-maximum likelihood estimates).

The default is COVEST=HESSIAN.

NDRAW=value

specifies the number of draws for Monte Carlo integration.

SEED=value

specifies a seed for pseudo-random number generation in Monte Carlo integration.

Options to Control the Optimization Process

PROC QLIM uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. All the NLO options are available from the NLOPTIONS statement. For details, see Chapter 6, “[Nonlinear Optimization Methods](#).”

METHOD=value

specifies the optimization method. If this option is specified, it overwrites the TECH= option in NLOPTIONS statement. Valid values are as follows:

CONGRA	performs a conjugate-gradient optimization
DBLDOG	performs a version of double-dogleg optimization
NMSIMP	performs a Nelder-Mead simplex optimization
NEWRAP	performs a Newton-Raphson optimization combining a line-search algorithm with ridging
NRRIDG	performs a Newton-Raphson optimization with ridging
QUANEW	performs a quasi-Newton optimization
TRUREG	performs a trust region optimization

The default method is METHOD=QUANEW.

BOUNDS Statement

BOUNDS *bound1* < , *bound2* ... > ;

The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the QLIM procedure. Any number of BOUNDS statements can be specified.

Each *bound* is composed of parameters and constants and inequality operators. Parameters associated with regressor variables are referred to by the names of the corresponding regressor variables:

item operator item < operator item < operator item ... > >

Each *item* is a constant, the name of a parameter, or a list of parameter names. See the section “[Naming of Parameters](#)” on page 1491 for more details on how parameters are named in the QLIM procedure. Each *operator* is '<', '>', '<=', or '>='.

Both the BOUNDS statement and the RESTRICT statement can be used to impose boundary constraints; however, the BOUNDS statement provides a simpler syntax for specifying these kinds of constraints. See the “[RESTRICT Statement](#)” on page 1468 for more information.

The following BOUNDS statement constrains the estimates of the parameters associated with the variable *ttime* and the variables *x1* through *x10* to be between zero and one. This example illustrates the use of parameter lists to specify boundary constraints.

```
bounds 0 < ttime x1-x10 < 1;
```

The following BOUNDS statement constrains the estimates of the correlation (*_RHO*) and sigma (*_SIGMA*) in the bivariate model:

```
bounds _rho >= 0, _sigma.y1 > 1, _sigma.y2 < 5;
```

BY Statement

BY *variables* ;

A BY statement can be used with PROC QLIM to obtain separate analyses on observations in groups defined by the BY variables.

CLASS Statement

CLASS *variables* ;

The CLASS statement names the classification variables to be used in the analysis. Classification variables can be either character or numeric.

Class levels are determined from the formatted values of the CLASS variables. Thus, you can use formats to group values into levels. See the discussion of the FORMAT procedure in *SAS Language Reference: Dictionary* for details.

ENDOGENOUS Statement

ENDOGENOUS *variables ~ options* ;

The ENDOGENOUS statement specifies the type of dependent variables that appear on the left-hand side of the equation. Endogenous variables listed refer to the dependent variables that appear on the left-hand side of the equation. Currently, no right-hand side endogeneity is handled in PROC QLIM. All variables appearing on the right-hand side of the equation are treated as exogenous.

Discrete Variable Options

DISCRETE <(*discrete-options*)>

specifies that the endogenous variables in this statement are discrete. Valid *discrete-options* are as follows:

ORDER=DATA | FORMATTED | FREQ | INTERNAL

specifies the sorting order for the levels of the discrete variables specified in the ENDOGENOUS statement. This ordering determines which parameters in the model correspond to each level in the data. The following table shows how PROC QLIM interprets values of the ORDER= option.

Value of ORDER=	Levels Sorted By
DATA	Order of appearance in the input data set
FORMATTED	Formatted value
FREQ	Descending frequency count; levels with the most observations come first in the order
INTERNAL	Unformatted value

By default, ORDER=FORMATTED. For the values FORMATTED and INTERNAL, the sort order is machine dependent. For more information about sorting order, see the chapter on the SORT procedure in the *Base SAS Procedures Guide*.

DISTRIBUTION=*distribution-type*

DIST=*distribution-type*

D=*distribution-type*

specifies the cumulative distribution function used to model the response probabilities. Valid values for *distribution-type* are as follows:

NORMAL the normal distribution for the probit model
 LOGISTIC the logistic distribution for the logit model

By default, DISTRIBUTION=NORMAL.

If a multivariate model is specified, logistic distribution is not allowed. Only normal distribution is supported.

Censored Variable Options

CENSORED <(*censored-options*)>

specifies that the endogenous variables in this statement be censored. Valid *censored-options* are as follows:

LB=*value or variable*

LOWERBOUND=*value or variable*

specifies the lower bound of the censored variables. If *value* is missing or the value in *variable* is missing, no lower bound is set. By default, no lower bound is set.

UB=*value or variable*

UPPERBOUND=*value or variable*

specifies the upper bound of the censored variables. If *value* is missing or the value in *variable* is missing, no upper bound is set. By default, no upper bound is set.

Truncated Variable Options

TRUNCATED <(*truncated-options*)>

specifies that the endogenous variables in this statement be truncated. Valid *truncated-options* are as follows:

LB=*value or variable*

LOWERBOUND=*value or variable*

specifies the lower bound of the truncated variables. If *value* is missing or the value in *variable* is missing, no lower bound is set. By default, no lower bound is set.

UB=*value or variable*

UPPERBOUND=*value or variable*

specifies the upper bound of the truncated variables. If *value* is missing or the value in *variable* is missing, no upper bound is set. By default, no upper bound is set.

Stochastic Frontier Variable Options

FRONTIER <(*frontier-options*)>

specifies that the endogenous variable in this statement follow a production or cost frontier. Valid *frontier-options* are as follows:

TYPE=

HALF specifies half-normal model.

EXPONENTIAL specifies exponential model.

TRUNCATED specifies truncated normal model.

PRODUCTION

specifies that the model estimated be a production function.

COST

specifies that the model estimated be a cost function.

If neither PRODUCTION nor COST option is specified, production function is estimated by default.

Selection Options

SELECT (*select-option*)

specifies selection criteria for sample selection model. *Select-option* specifies the condition for the endogenous variable to be selected. It is written as a variable name, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a number:

variable operator number

The *variable* is the endogenous variable that the selection is based on. The *operator* can be =, <, >, <=, or >=. Multiple *select-options* can be combined with the logic operators: AND, OR. The following example illustrates the use of the SELECT option:

```
endogenous y1 ~ select (z=0);
endogenous y2 ~ select (z=1 or z=2);
```

The SELECT option can be used together with the DISCRETE, CENSORED, or TRUNCATED option. For example:

```
endogenous y1 ~ select (z=0) discrete;
endogenous y2 ~ select (z=1) censored (lb=0);
endogenous y3 ~ select (z=1 or z=2) truncated (ub=10);
```

For more details about selection models with censoring or truncation, see the section “[Selection Models](#)” on page 1483.

FREQ Statement

FREQ *variable* ;

The FREQ statement identifies a variable that contains the frequency of occurrence of each observation. PROC QLIM treats each observation as if it appears n times, where n is the value of the FREQ variable for the observation. If it is not an integer, the frequency value is truncated to an integer. If the frequency value is less than 1 or missing, the observation is not used in the model fitting. When the FREQ statement is not specified, each observation is assigned a frequency of 1. If you specify more than one FREQ statement, then the first FREQ statement is used.

HETERO Statement

HETERO *dependent variables* ~ *exogenous variables* </ options > ;

The HETERO statement specifies variables that are related to the heteroscedasticity of the residuals and the way these variables are used to model the error variance. The heteroscedastic regression model supported

by PROC QLIM is

$$y_i = \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i$$

$$\epsilon_i \sim N(0, \sigma_i^2)$$

See the section “[Heteroscedasticity](#)” on page 1480 for more details on the specification of functional forms.

LINK=value

The functional form can be specified using the LINK= option. The following option values are allowed:

EXP specifies the exponential link function

$$\sigma_i^2 = \sigma^2(1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma}))$$

LINEAR specifies the linear link function

$$\sigma_i^2 = \sigma^2(1 + \mathbf{z}_i' \boldsymbol{\gamma})$$

When the LINK= option is not specified, the exponential link function is specified by default.

NOCONST

specifies that there be no constant in the linear or exponential heteroscedasticity model.

$$\sigma_i^2 = \sigma^2(\mathbf{z}_i' \boldsymbol{\gamma})$$

$$\sigma_i^2 = \sigma^2 \exp(\mathbf{z}_i' \boldsymbol{\gamma})$$

SQUARE

estimates the model by using the square of linear heteroscedasticity function. For example, you can specify the following heteroscedasticity function:

$$\sigma_i^2 = \sigma^2(1 + (\mathbf{z}_i' \boldsymbol{\gamma})^2)$$

```
model y = x1 x2 / discrete;
hetero y ~ z1 / link=linear square;
```

The option SQUARE does not apply to exponential heteroscedasticity function because the square of an exponential function of $\mathbf{z}_i' \boldsymbol{\gamma}$ is the same as the exponential of $2\mathbf{z}_i' \boldsymbol{\gamma}$. Hence the only difference is that all $\boldsymbol{\gamma}$ estimates are divided by two.

INIT Statement

```
INIT initvalue1 < , initvalue2 ... > ;
```

The INIT statement is used to set initial values for parameters in the optimization. Any number of INIT statements can be specified.

Each *initvalue* is written as a parameter or parameter list, followed by an optional equality operator (=), followed by a number:

parameter <=> **number**

MODEL Statement

MODEL *dependent* = *regressors* < / *options* > ;

The MODEL statement specifies the dependent variable and independent regressor variables for the regression model.

The following options can be used in the MODEL statement after a slash (/).

LIMIT1=*value*

specifies the restriction of the threshold value of the first category when the ordinal probit or logit model is estimated. LIMIT1=ZERO is the default option. When LIMIT1=VARYING is specified, the threshold value is estimated.

NOINT

suppresses the intercept parameter.

Endogenous Variable Options

The endogenous variable options are the same as the options specified in the ENDOGENOUS statement. If an endogenous variable has an endogenous option specified in both the MODEL statement and the ENDOGENOUS statement, the option in the ENDOGENOUS statement is used.

BOXCOX Estimation Options

BOXCOX (*option-list*)

specifies options that are used for Box-Cox regression or regressor transformation. For example, the Box-Cox regression is specified as

```
model y = x1 x2 / boxcox(y=lambda,x1 x2)
```

PROC QLIM estimates the following Box-Cox regression model:

$$y_i^{(\lambda)} = \beta_0 + \beta_1 x_{1i}^{(\lambda_1)} + \beta_2 x_{2i}^{(\lambda_2)} + \epsilon_i$$

The *option-list* takes the form *variable-list* < = *varname* > separated by ','. The *variable-list* specifies that the list of variables have the same Box-Cox transformation; *varname* specifies the name of this Box-Cox coefficient. If *varname* is not specified, the coefficient is called *_Lambdai*, where *i* increments sequentially.

NLOPTIONS Statement

NLOPTIONS *< options >* ;

PROC QLIM uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “[Nonlinear Optimization Methods](#).”

OUTPUT Statement

OUTPUT *< OUT=SAS-data-set >* *< output-options >* ;

The OUTPUT statement creates a new SAS data set containing all variables in the input data set and, optionally, the estimates of $\mathbf{x}'\boldsymbol{\beta}$, predicted value, residual, marginal effects, probability, standard deviation of the error, expected value, conditional expected value, technical efficiency measures, and inverse Mills ratio. When the response values are missing for the observation, all output estimates except residual are still computed as long as none of the explanatory variables is missing. This enables you to compute these statistics for prediction. You can specify only one OUTPUT statement.

Details on the specifications in the OUTPUT statement are as follows:

CONDITIONAL

outputs estimates of conditional expected values of continuous endogenous variables.

ERRSTD

outputs estimates of σ_j , the standard deviation of the error term.

EXPECTED

outputs estimates of expected values of continuous endogenous variables.

MARGINAL

outputs marginal effects.

MILLS

outputs estimates of inverse Mills ratios of censored or truncated continuous, binary discrete, and selection endogenous variables.

OUT=SAS-data-set

names the output data set.

PREDICTED

outputs estimates of predicted endogenous variables.

PROB

outputs estimates of probability of discrete endogenous variables taking the current observed responses.

PROBALL

outputs estimates of probability of discrete endogenous variables for all possible responses.

RESIDUAL

outputs estimates of residuals of continuous endogenous variables.

XBETA

outputs estimates of $\mathbf{x}'\boldsymbol{\beta}$.

TE1

outputs estimates of technical efficiency for each producer in the stochastic frontier model suggested by Battese and Coelli (1988).

TE2

outputs estimates of technical efficiency for each producer in the stochastic frontier model suggested by Jondrow et al. (1982).

RESTRICT Statement

RESTRICT *restriction1* <, *restriction2* ... > ;

The RESTRICT statement is used to impose linear restrictions on the parameter estimates. Any number of RESTRICT statements can be specified, but the number of restrictions imposed is limited by the number of regressors.

Each *restriction* is written as an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

expression operator expression

The *operator* can be =, <, >, <=, or >=. The operator and second expression are optional.

Restriction expressions can be composed of parameter names, multiplication (*), addition (+) and subtraction (−) operators, and constants. Parameters named in restriction expressions must be among the parameters estimated by the model. Parameters associated with a regressor variable are referred to by the name of the corresponding regressor variable. The restriction expressions must be a linear function of the parameters.

The following is an example of the use of the RESTRICT statement:

```
proc qlim data=one;
  model y = x1-x10 / discrete;
  restrict x1*x2 <= x2 + x3;
run;
```

The RESTRICT statement can also be used to impose cross-equation restrictions in multivariate models. The following RESTRICT statement imposes an equality restriction on coefficients of x_1 in equation y_1 and x_1 in equation y_2 :

```
proc qlim data=one;
  model y1 = x1-x10;
  model y2 = x1-x4;
  endogenous y1 y2 ~ discrete;
  restrict y1.x1=y2.x1;
run;
```

TEST Statement

<'label':> TEST <'string':> equation [,equation...]/ options ;

The TEST statement performs Wald, Lagrange multiplier, and likelihood ratio tests of linear hypotheses about the regression parameters in the preceding MODEL statement. Each equation specifies a linear hypothesis to be tested. All hypotheses in one TEST statement are tested jointly. Variable names in the equations must correspond to regressors in the preceding MODEL statement, and each name represents the coefficient of the corresponding regressor. The keyword INTERCEPT refers to the coefficient of the intercept.

The following options can be specified in the TEST statement after the slash (/):

ALL

requests Wald, Lagrange multiplier, and likelihood ratio tests.

WALD

requests the Wald test.

LM

requests the Lagrange multiplier test.

LR

requests the likelihood ratio test.

The following illustrates the use of the TEST statement:

```
proc qlim;
  model y = x1 x2 x3;
  test x1 = 0, x2 * .5 + 2 * x3 = 0;
  test _int: test intercept = 0, x3 = 0;
run;
```

The first test investigates the joint hypothesis that

$$\beta_1 = 0$$

and

$$0.5\beta_2 + 2\beta_3 = 0$$

In case there is more than one MODEL statement in one QLIM procedure, then TEST statement is capable of testing cross equation restrictions. Each parameter reference should be preceded by the name of the dependent variable of the particular model and the dot sign. For example,

```
proc qlim;
  model y1 = x1 x2 x3;
  model y2 = x3 x5 x6;
  test y1.x1 + y2.x6 = 1;
run;
```

This cross equation test investigates the null hypothesis that

$$\beta_{1,1} + \beta_{2,3} = 1$$

in the system of equations

$$\begin{aligned} y_{1,i} &= \alpha_1 + \beta_{1,1}x_{1,i} + \beta_{1,2}x_{2,i} + \beta_{1,3}x_{3,i} \\ y_{2,i} &= \alpha_2 + \beta_{2,1}x_{3,i} + \beta_{2,2}x_{5,i} + \beta_{2,3}x_{6,i}. \end{aligned}$$

Only linear equality restrictions and tests are permitted in PROC QLIM. Tests expressions can be composed only of algebraic operations involving the addition symbol (+), subtraction symbol (-), and multiplication symbol (*).

The TEST statement accepts labels that are reproduced in the printed output. TEST statement can be labeled in two ways. A TEST statement can be preceded by a label followed by a colon. Alternatively, the keyword TEST can be followed by a quoted string. If both are present, PROC QLIM uses the label preceding the colon. In the event no label is present, PROC QLIM automatically labels the tests.

WEIGHT Statement

WEIGHT *variable* </ option> ;

The WEIGHT statement specifies a variable to supply weighting values to use for each observation in estimating parameters. The log likelihood for each observation is multiplied by the corresponding weight variable value.

If the weight of an observation is nonpositive, that observation is not used in the estimation.

The following option can be added to the WEIGHT statement after a slash (/).

NONNORMALIZE

specifies that the weights are required to be used as is. When this option is not specified, the weights are normalized so that they add up to the actual sample size. Weights w_i are normalized by multiplying them by $\frac{n}{\sum_{i=1}^n w_i}$, where n is the sample size.

Details: QLIM Procedure

Ordinal Discrete Choice Modeling

Binary Probit and Logit Model

The binary choice model is

$$y_i^* = \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i$$

where value of the latent dependent variable, y_i^* , is observed only as follows:

$$\begin{aligned} y_i &= 1 \quad \text{if } y_i^* > 0 \\ &= 0 \quad \text{otherwise} \end{aligned}$$

The disturbance, ϵ_i , of the probit model has standard normal distribution with the distribution function (CDF)

$$\Phi(x) = \int_{-\infty}^x \frac{1}{\sqrt{2\pi}} \exp(-t^2/2) dt$$

The disturbance of the logit model has standard logistic distribution with the CDF

$$\Lambda(x) = \frac{\exp(x)}{1 + \exp(x)} = \frac{1}{1 + \exp(-x)}$$

The binary discrete choice model has the following probability that the event $\{y_i = 1\}$ occurs:

$$P(y_i = 1) = F(\mathbf{x}_i' \boldsymbol{\beta}) = \begin{cases} \Phi(\mathbf{x}_i' \boldsymbol{\beta}) & \text{(probit)} \\ \Lambda(\mathbf{x}_i' \boldsymbol{\beta}) & \text{(logit)} \end{cases}$$

The log-likelihood function is

$$\ell = \sum_{i=1}^N \{y_i \log[F(\mathbf{x}_i' \boldsymbol{\beta})] + (1 - y_i) \log[1 - F(\mathbf{x}_i' \boldsymbol{\beta})]\}$$

where the CDF $F(x)$ is defined as $\Phi(x)$ for the probit model while $F(x) = \Lambda(x)$ for logit. The first order derivative of the logit model are

$$\frac{\partial \ell}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N (y_i - \Lambda(\mathbf{x}_i' \boldsymbol{\beta})) \mathbf{x}_i$$

The probit model has more complicated derivatives

$$\frac{\partial \ell}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N \left[\frac{(2y_i - 1) \phi(\mathbf{x}_i' \boldsymbol{\beta})}{\Phi(\mathbf{x}_i' \boldsymbol{\beta})} \right] \mathbf{x}_i = \sum_{i=1}^N r_i \mathbf{x}_i$$

where

$$r_i = \frac{(2y_i - 1)\phi(\mathbf{x}'_i\boldsymbol{\beta})}{\Phi(\mathbf{x}'_i\boldsymbol{\beta})}$$

Note that the logit maximum likelihood estimates are $\frac{\pi}{\sqrt{3}}$ times greater than probit maximum likelihood estimates, since the probit parameter estimates, $\boldsymbol{\beta}$, are standardized, and the error term with logistic distribution has a variance of $\frac{\pi^2}{3}$.

Ordinal Probit/Logit

When the dependent variable is observed in sequence with M categories, binary discrete choice modeling is not appropriate for data analysis. McKelvey and Zavoina (1975) proposed the ordinal (or ordered) probit model.

Consider the following regression equation:

$$y_i^* = \mathbf{x}'_i\boldsymbol{\beta} + \epsilon_i$$

where error disturbances, ϵ_i , have the distribution function F . The unobserved continuous random variable, y_i^* , is identified as M categories. Suppose there are $M + 1$ real numbers, μ_0, \dots, μ_M , where $\mu_0 = -\infty$, $\mu_1 = 0$, $\mu_M = \infty$, and $\mu_0 \leq \mu_1 \leq \dots \leq \mu_M$. Define

$$R_{i,j} = \mu_j - \mathbf{x}'_i\boldsymbol{\beta}$$

The probability that the unobserved dependent variable is contained in the j th category can be written as

$$P[\mu_{j-1} < y_i^* \leq \mu_j] = F(R_{i,j}) - F(R_{i,j-1})$$

The log-likelihood function is

$$\ell = \sum_{i=1}^N \sum_{j=1}^M d_{ij} \log [F(R_{i,j}) - F(R_{i,j-1})]$$

where

$$d_{ij} = \begin{cases} 1 & \text{if } \mu_{j-1} < y_i \leq \mu_j \\ 0 & \text{otherwise} \end{cases}$$

The first derivatives are written as

$$\begin{aligned} \frac{\partial \ell}{\partial \boldsymbol{\beta}} &= \sum_{i=1}^N \sum_{j=1}^M d_{ij} \left[\frac{f(R_{i,j-1}) - f(R_{i,j})}{F(R_{i,j}) - F(R_{i,j-1})} \mathbf{x}_i \right] \\ \frac{\partial \ell}{\partial \mu_k} &= \sum_{i=1}^N \sum_{j=1}^M d_{ij} \left[\frac{\delta_{j,k} f(R_{i,j}) - \delta_{j-1,k} f(R_{i,j-1})}{F(R_{i,j}) - F(R_{i,j-1})} \right] \end{aligned}$$

where $f(x) = \frac{dF(x)}{dx}$ and $\delta_{j,k} = 1$ if $j = k$. When the ordinal probit is estimated, it is assumed that $F(R_{i,j}) = \Phi(R_{i,j})$. The ordinal logit model is estimated if $F(R_{i,j}) = \Lambda(R_{i,j})$. The first threshold

parameter, μ_1 , is estimated when the LIMIT1=VARYING option is specified. By default (LIMIT1=ZERO), so that $M - 2$ threshold parameters (μ_2, \dots, μ_{M-1}) are estimated.

The ordered probit models are analyzed by Aitchison and Silvey (1957), and Cox (1970) discussed ordered response data by using the logit model. They defined the probability that y_i^* belongs to j th category as

$$P[\mu_{j-1} < y_i \leq \mu_j] = F(\mu_j + \mathbf{x}_i' \boldsymbol{\theta}) - F(\mu_{j-1} + \mathbf{x}_i' \boldsymbol{\theta})$$

where $\mu_0 = -\infty$ and $\mu_M = \infty$. Therefore, the ordered response model analyzed by Aitchison and Silvey can be estimated if the LIMIT1=VARYING option is specified. Note that $\boldsymbol{\theta} = -\boldsymbol{\beta}$.

Goodness-of-Fit Measures

The goodness-of-fit measures discussed in this section apply only to discrete dependent variable models.

McFadden (1974) suggested a likelihood ratio index that is analogous to the R^2 in the linear regression model:

$$R_M^2 = 1 - \frac{\ln L}{\ln L_0}$$

where L is the value of the maximum likelihood function and L_0 is a likelihood function when regression coefficients except an intercept term are zero. It can be shown that L_0 can be written as

$$L_0 = \sum_{j=1}^M N_j \ln\left(\frac{N_j}{N}\right)$$

where N_j is the number of responses in category j .

Estrella (1998) proposes the following requirements for a goodness-of-fit measure to be desirable in discrete choice modeling:

- The measure must take values in $[0, 1]$, where 0 represents no fit and 1 corresponds to perfect fit.
- The measure should be directly related to the valid test statistic for significance of all slope coefficients.
- The derivative of the measure with respect to the test statistic should comply with corresponding derivatives in a linear regression.

Estrella's (1998) measure is written

$$R_{E1}^2 = 1 - \left(\frac{\ln L}{\ln L_0} \right)^{-\frac{2}{N} \ln L_0}$$

An alternative measure suggested by Estrella (1998) is

$$R_{E2}^2 = 1 - [(\ln L - K) / \ln L_0]^{-\frac{2}{N} \ln L_0}$$

where $\ln L_0$ is computed with null slope parameter values, N is the number observations used, and K represents the number of estimated parameters.

Other goodness-of-fit measures are summarized as follows:

$$R_{CU1}^2 = 1 - \left(\frac{L_0}{L} \right)^{\frac{2}{N}} \quad (\text{Cragg} - \text{Uhler1})$$

$$R_{CU2}^2 = \frac{1 - (L_0/L)^{\frac{2}{N}}}{1 - L_0^{\frac{2}{N}}} \quad (\text{Cragg} - \text{Uhler2})$$

$$R_A^2 = \frac{2(\ln L - \ln L_0)}{2(\ln L - \ln L_0) + N} \quad (\text{Aldrich} - \text{Nelson})$$

$$R_{VZ}^2 = R_A^2 \frac{2 \ln L_0 - N}{2 \ln L_0} \quad (\text{Veall} - \text{Zimmermann})$$

$$R_{MZ}^2 = \frac{\sum_{i=1}^N (\hat{y}_i - \bar{\hat{y}})^2}{N + \sum_{i=1}^N (\hat{y}_i - \bar{\hat{y}})^2} \quad (\text{McKelvey} - \text{Zavoina})$$

where $\hat{y}_i = \mathbf{x}_i' \hat{\boldsymbol{\beta}}$ and $\bar{\hat{y}} = \sum_{i=1}^N \hat{y}_i / N$.

Limited Dependent Variable Models

Censored Regression Models

When the dependent variable is censored, values in a certain range are all transformed to a single value. For example, the standard tobit model can be defined as

$$y_i^* = \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i$$

$$y_i = \begin{cases} y_i^* & \text{if } y_i^* > 0 \\ 0 & \text{if } y_i^* \leq 0 \end{cases}$$

where $\epsilon_i \sim iidN(0, \sigma^2)$. The log-likelihood function of the standard censored regression model is

$$\ell = \sum_{i \in \{y_i=0\}} \ln[1 - \Phi(\mathbf{x}_i' \boldsymbol{\beta} / \sigma)] + \sum_{i \in \{y_i>0\}} \ln \left[\phi\left(\frac{y_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma}\right) / \sigma \right]$$

where $\Phi(\cdot)$ is the cumulative density function of the standard normal distribution and $\phi(\cdot)$ is the probability density function of the standard normal distribution.

The tobit model can be generalized to handle observation-by-observation censoring. The censored model on both of the lower and upper limits can be defined as

$$y_i = \begin{cases} R_i & \text{if } y_i^* \geq R_i \\ y_i^* & \text{if } L_i < y_i^* < R_i \\ L_i & \text{if } y_i^* \leq L_i \end{cases}$$

The log-likelihood function can be written as

$$\begin{aligned} \ell = & \sum_{i \in \{L_i < y_i < R_i\}} \ln \left[\phi \left(\frac{y_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) / \sigma \right] + \sum_{i \in \{y_i = R_i\}} \ln \left[\Phi \left(-\frac{R_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) \right] + \\ & \sum_{i \in \{y_i = L_i\}} \ln \left[\Phi \left(\frac{L_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) \right] \end{aligned}$$

Log-likelihood functions of the lower- or upper-limit censored model are easily derived from the two-limit censored model. The log-likelihood function of the lower-limit censored model is

$$\ell = \sum_{i \in \{y_i > L_i\}} \ln \left[\phi \left(\frac{y_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) / \sigma \right] + \sum_{i \in \{y_i = L_i\}} \ln \left[\Phi \left(\frac{L_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) \right]$$

The log-likelihood function of the upper-limit censored model is

$$\ell = \sum_{i \in \{y_i < R_i\}} \ln \left[\phi \left(\frac{y_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) / \sigma \right] + \sum_{i \in \{y_i = R_i\}} \ln \left[1 - \Phi \left(\frac{R_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) \right]$$

Types of Tobit Models

Amemiya (1984) classified Tobit models into five types based on characteristics of the likelihood function. For notational convenience, let P denote a distribution or density function, y_{ji}^* is assumed to be normally distributed with mean $\mathbf{x}'_{ji} \boldsymbol{\beta}_j$ and variance σ_j^2 .

Type 1 Tobit

The Type 1 Tobit model was already discussed in the preceding section.

$$\begin{aligned} y_{1i}^* &= \mathbf{x}'_{1i} \boldsymbol{\beta}_1 + u_{1i} \\ y_{1i} &= y_{1i}^* \quad \text{if } y_{1i}^* > 0 \\ &= 0 \quad \text{if } y_{1i}^* \leq 0 \end{aligned}$$

The likelihood function is characterized as $P(y_1 < 0)P(y_1)$.

Type 2 Tobit

The Type 2 Tobit model is defined as

$$\begin{aligned}
 y_{1i}^* &= \mathbf{x}_{1i}'\boldsymbol{\beta}_1 + u_{1i} \\
 y_{2i}^* &= \mathbf{x}_{2i}'\boldsymbol{\beta}_2 + u_{2i} \\
 y_{1i} &= 1 \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{2i} &= y_{2i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0
 \end{aligned}$$

where $(u_{1i}, u_{2i}) \sim N(0, \Sigma)$. The likelihood function is described as $P(y_1 < 0)P(y_1 > 0, y_2)$.

Type 3 Tobit

The Type 3 Tobit model is different from the Type 2 Tobit in that y_{1i}^* of the Type 3 Tobit is observed when $y_{1i}^* > 0$.

$$\begin{aligned}
 y_{1i}^* &= \mathbf{x}_{1i}'\boldsymbol{\beta}_1 + u_{1i} \\
 y_{2i}^* &= \mathbf{x}_{2i}'\boldsymbol{\beta}_2 + u_{2i} \\
 y_{1i} &= y_{1i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{2i} &= y_{2i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0
 \end{aligned}$$

where $(u_{1i}, u_{2i})' \sim iidN(0, \Sigma)$.

The likelihood function is characterized as $P(y_1 < 0)P(y_1, y_2)$.

Type 4 Tobit

The Type 4 Tobit model consists of three equations:

$$\begin{aligned}
 y_{1i}^* &= \mathbf{x}_{1i}'\boldsymbol{\beta}_1 + u_{1i} \\
 y_{2i}^* &= \mathbf{x}_{2i}'\boldsymbol{\beta}_2 + u_{2i} \\
 y_{3i}^* &= \mathbf{x}_{3i}'\boldsymbol{\beta}_3 + u_{3i} \\
 y_{1i} &= y_{1i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{2i} &= y_{2i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{3i} &= y_{3i}^* \quad \text{if } y_{1i}^* \leq 0 \\
 &= 0 \quad \text{if } y_{1i}^* > 0
 \end{aligned}$$

where $(u_{1i}, u_{2i}, u_{3i})' \sim iidN(0, \Sigma)$. The likelihood function of the Type 4 Tobit model is characterized as $P(y_1 < 0, y_3)P(y_1, y_2)$.

Type 5 Tobit

The Type 5 Tobit model is defined as follows:

$$\begin{aligned}
 y_{1i}^* &= \mathbf{x}_{1i}'\boldsymbol{\beta}_1 + u_{1i} \\
 y_{2i}^* &= \mathbf{x}_{2i}'\boldsymbol{\beta}_2 + u_{2i} \\
 y_{3i}^* &= \mathbf{x}_{3i}'\boldsymbol{\beta}_3 + u_{3i} \\
 y_{1i} &= 1 \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{2i} &= y_{2i}^* \quad \text{if } y_{1i}^* > 0 \\
 &= 0 \quad \text{if } y_{1i}^* \leq 0 \\
 y_{3i} &= y_{3i}^* \quad \text{if } y_{1i}^* \leq 0 \\
 &= 0 \quad \text{if } y_{1i}^* > 0
 \end{aligned}$$

where $(u_{1i}, u_{2i}, u_{3i})'$ are from *iid* trivariate normal distribution. The likelihood function of the Type 5 Tobit model is characterized as $P(y_1 < 0, y_3)P(y_1 > 0, y_2)$.

Code examples for these models can be found in “[Example 22.6: Types of Tobit Models](#)” on page 1503.

Truncated Regression Models

In a truncated model, the observed sample is a subset of the population where the dependent variable falls in a certain range. For example, when neither a dependent variable nor exogenous variables are observed for $y_i^* \leq 0$, the truncated regression model can be specified.

$$\ell = \sum_{i \in \{y_i > 0\}} \left\{ -\ln \Phi(\mathbf{x}_i'\boldsymbol{\beta}/\sigma) + \ln \left[\frac{\phi((y_i - \mathbf{x}_i'\boldsymbol{\beta})/\sigma)}{\sigma} \right] \right\}$$

Two-limit truncation model is defined as

$$y_i = y_i^* \text{ if } L_i < y_i^* < R_i$$

The log-likelihood function of the two-limit truncated regression model is

$$\ell = \sum_{i=1}^N \left\{ \ln \left[\phi\left(\frac{y_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right)/\sigma \right] - \ln \left[\Phi\left(\frac{R_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right) - \Phi\left(\frac{L_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right) \right] \right\}$$

The log-likelihood functions of the lower- and upper-limit truncation model are

$$\begin{aligned}
 \ell &= \sum_{i=1}^N \left\{ \ln \left[\phi\left(\frac{y_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right)/\sigma \right] - \ln \left[1 - \Phi\left(\frac{L_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right) \right] \right\} \quad (\text{lower}) \\
 \ell &= \sum_{i=1}^N \left\{ \ln \left[\phi\left(\frac{y_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right)/\sigma \right] - \ln \left[\Phi\left(\frac{R_i - \mathbf{x}_i'\boldsymbol{\beta}}{\sigma}\right) \right] \right\} \quad (\text{upper})
 \end{aligned}$$

Stochastic Frontier Production and Cost Models

Stochastic frontier production models were first developed by Aigner, Lovell, and Schmidt (1977) and Meeusen and van den Broeck (1977). Specification of these models allow for random shocks of the production or cost but also include a term for technological or cost inefficiency. Assuming that the production function takes a log-linear Cobb-Douglas form, the stochastic frontier production model can be written as

$$\ln(y_i) = \beta_0 + \sum_n \beta_n \ln(x_{ni}) + \epsilon_i$$

where $\epsilon_i = v_i - u_i$. The v_i term represents the stochastic error component and u_i is the nonnegative, technology inefficiency error component. The v_i error component is assumed to be distributed iid normal and independently from u_i . If $u_i > 0$, the error term, ϵ_i , is negatively skewed and represents technology inefficiency. If $u_i < 0$, the error term ϵ_i is positively skewed and represents cost inefficiency. PROC QLIM models the u_i error component as a half normal, exponential, or truncated normal distribution.

The Normal-Half Normal Model

In case of the normal-half normal model, v_i is iid $N(0, \sigma_v^2)$, u_i is iid $N^+(0, \sigma_u^2)$ with v_i and u_i independent of each other. Given the independence of error terms, the joint density of v and u can be written as

$$f(u, v) = \frac{2}{2\pi\sigma_u\sigma_v} \exp \left\{ -\frac{u^2}{2\sigma_u^2} - \frac{v^2}{2\sigma_v^2} \right\}$$

Substituting $v = \epsilon + u$ into the preceding equation gives

$$f(u, \epsilon) = \frac{2}{2\pi\sigma_u\sigma_v} \exp \left\{ -\frac{u^2}{2\sigma_u^2} - \frac{(\epsilon + u)^2}{2\sigma_v^2} \right\}$$

Integrating u out to obtain the marginal density function of ϵ results in the following form:

$$\begin{aligned} f(\epsilon) &= \int_0^\infty f(u, \epsilon) du \\ &= \frac{2}{\sqrt{2\pi}\sigma} \left[1 - \phi \left(\frac{\epsilon\lambda}{\sigma} \right) \right] \exp \left\{ -\frac{\epsilon^2}{2\sigma^2} \right\} \\ &= \frac{2}{\sigma} \phi \left(\frac{\epsilon}{\sigma} \right) \Phi \left(-\frac{\epsilon\lambda}{\sigma} \right) \end{aligned}$$

where $\lambda = \sigma_u/\sigma_v$ and $\sigma = \sqrt{\sigma_u^2 + \sigma_v^2}$.

In the case of a stochastic frontier cost model, $v = \epsilon - u$ and

$$f(\epsilon) = \frac{2}{\sigma} \phi \left(\frac{\epsilon}{\sigma} \right) \Phi \left(\frac{\epsilon\lambda}{\sigma} \right)$$

The log-likelihood function for the production model with N producers is written as

$$\ln L = \text{constant} - N \ln \sigma + \sum_i \ln \Phi \left(-\frac{\epsilon_i \lambda}{\sigma} \right) - \frac{1}{2\sigma^2} \sum_i \epsilon_i^2$$

The Normal-Exponential Model

Under the normal-exponential model, v_i is iid $N(0, \sigma_v^2)$ and u_i is iid exponential. Given the independence of error term components u_i and v_i , the joint density of v and u can be written as

$$f(u, v) = \frac{1}{\sqrt{2\pi}\sigma_u\sigma_v} \exp \left\{ -\frac{u}{\sigma_u} - \frac{v^2}{2\sigma_v^2} \right\}$$

The marginal density function of ϵ for the production function is

$$\begin{aligned} f(\epsilon) &= \int_0^\infty f(u, \epsilon) du \\ &= \left(\frac{1}{\sigma_u} \right) \Phi \left(-\frac{\epsilon}{\sigma_v} - \frac{\sigma_v}{\sigma_u} \right) \exp \left\{ \frac{\epsilon}{\sigma_u} + \frac{\sigma_v^2}{2\sigma_u^2} \right\} \end{aligned}$$

and the marginal density function for the cost function is equal to

$$f(\epsilon) = \left(\frac{1}{\sigma_u} \right) \Phi \left(\frac{\epsilon}{\sigma_v} - \frac{\sigma_v}{\sigma_u} \right) \exp \left\{ -\frac{\epsilon}{\sigma_u} + \frac{\sigma_v^2}{2\sigma_u^2} \right\}$$

The log-likelihood function for the normal-exponential production model with N producers is

$$\ln L = \text{constant} - N \ln \sigma_u + N \left(\frac{\sigma_v^2}{2\sigma_u^2} \right) + \sum_i \frac{\epsilon_i}{\sigma_u} + \sum_i \ln \Phi \left(\frac{\epsilon_i}{\sigma_v} - \frac{\sigma_v}{\sigma_u} \right)$$

The Normal-Truncated Normal Model

The normal-truncated normal model is a generalization of the normal-half normal model by allowing the mean of u_i to differ from zero. Under the normal-truncated normal model, the error term component v_i is iid $N^+(0, \sigma_v^2)$ and u_i is iid $N(\mu, \sigma_u^2)$. The joint density of v_i and u_i can be written as

$$f(u, v) = \frac{1}{\sqrt{2\pi}\sigma_u\sigma_v\Phi(\mu/\sigma_u)} \exp\left\{-\frac{(u-\mu)^2}{2\sigma_u^2} - \frac{v^2}{2\sigma_v^2}\right\}$$

The marginal density function of ϵ for the production function is

$$\begin{aligned} f(\epsilon) &= \int_0^\infty f(u, \epsilon) du \\ &= \frac{1}{\sqrt{2\pi}\sigma\Phi(\mu/\sigma_u)} \Phi\left(\frac{\mu}{\sigma\lambda} - \frac{\epsilon\lambda}{\sigma}\right) \exp\left\{-\frac{(\epsilon + \mu)^2}{2\sigma^2}\right\} \\ &= \frac{1}{\sigma}\phi\left(\frac{\epsilon + \mu}{\sigma}\right) \Phi\left(\frac{\mu}{\sigma\lambda} - \frac{\epsilon\lambda}{\sigma}\right) \left[\Phi\left(\frac{\mu}{\sigma_u}\right)\right]^{-1} \end{aligned}$$

and the marginal density function for the cost function is

$$f(\epsilon) = \frac{1}{\sigma}\phi\left(\frac{\epsilon - \mu}{\sigma}\right) \Phi\left(\frac{\mu}{\sigma\lambda} + \frac{\epsilon\lambda}{\sigma}\right) \left[\Phi\left(\frac{\mu}{\sigma_u}\right)\right]^{-1}$$

The log-likelihood function for the normal-truncated normal production model with N producers is

$$\begin{aligned} \ln L &= \text{constant} - N \ln \sigma - N \ln \Phi\left(\frac{\mu}{\sigma_u}\right) + \sum_i \ln \Phi\left(\frac{\mu}{\sigma\lambda} + \frac{\epsilon_i\lambda}{\sigma}\right) \\ &\quad - \frac{1}{2} \sum_i \left(\frac{\epsilon_i + \mu}{\sigma}\right)^2 \end{aligned}$$

For more detail on normal-half normal, normal-exponential, and normal-truncated models, see Kumbhakar and Knox Lovell (2000) and Coelli, Prasada Rao, and Battese (1998).

Heteroscedasticity and Box-Cox Transformation

Heteroscedasticity

If the variance of regression disturbance, (ϵ_i) , is heteroscedastic, the variance can be specified as a function of variables

$$E(\epsilon_i^2) = \sigma_i^2 = f(\mathbf{z}_i' \boldsymbol{\gamma})$$

The following table shows various functional forms of heteroscedasticity and the corresponding options to request each model.

No.	Model	Options
1	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2(1 + \exp(\mathbf{z}'_i \boldsymbol{\gamma}))$	LINK=EXP (default)
2	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2 \exp(\mathbf{z}'_i \boldsymbol{\gamma})$	LINK=EXP NOCONST
3	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2(1 + \sum_{l=1}^L \gamma_l z_{li})$	LINK=LINEAR
4	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2(1 + (\sum_{l=1}^L \gamma_l z_{li})^2)$	LINK=LINEAR SQUARE
5	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2(\sum_{l=1}^L \gamma_l z_{li})$	LINK=LINEAR NOCONST
6	$f(\mathbf{z}'_i \boldsymbol{\gamma}) = \sigma^2((\sum_{l=1}^L \gamma_l z_{li})^2)$	LINK=LINEAR SQUARE NOCONST

For discrete choice models, σ^2 is normalized ($\sigma^2 = 1$) since this parameter is not identified. Note that in models 3 and 5, it may be possible that variances of some observations are negative. Although the QLIM procedure assigns a large penalty to move the optimization away from such region, it is possible that the optimization cannot improve the objective function value and gets locked in the region. Signs of such outcome include extremely small likelihood values or missing standard errors in the estimates. In models 2 and 6, variances are guaranteed to be greater or equal to zero, but it may be possible that variances of some observations are very close to zero. In these scenarios, standard errors may be missing. Models 1 and 4 do not have such problems. Variances in these models are always positive and never close to zero.

The heteroscedastic regression model is estimated using the following log-likelihood function:

$$\ell = -\frac{N}{2} \ln(2\pi) - \sum_{i=1}^N \frac{1}{2} \ln(\sigma_i^2) - \frac{1}{2} \sum_{i=1}^N \left(\frac{e_i}{\sigma_i}\right)^2$$

where $e_i = y_i - \mathbf{x}'_i \boldsymbol{\beta}$.

Box-Cox Modeling

The Box-Cox transformation on x is defined as

$$x^{(\lambda)} = \begin{cases} \frac{x^\lambda - 1}{\lambda} & \text{if } \lambda \neq 0 \\ \ln(x) & \text{if } \lambda = 0 \end{cases}$$

The Box-Cox regression model with heteroscedasticity is written as

$$\begin{aligned} y_i^{(\lambda_0)} &= \beta_0 + \sum_{k=1}^K \beta_k x_{ki}^{(\lambda_k)} + \epsilon_i \\ &= \mu_i + \epsilon_i \end{aligned}$$

where $\epsilon_i \sim N(0, \sigma_i^2)$ and transformed variables must be positive. In practice, too many transformation parameters cause numerical problems in model fitting. It is common to have the same Box-Cox transformation performed on all the variables — that is, $\lambda_0 = \lambda_1 = \dots = \lambda_K$. It is required for the magnitude

of transformed variables to be in the tolerable range if the corresponding transformation parameters are $|\lambda| > 1$.

The log-likelihood function of the Box-Cox regression model is written as

$$\ell = -\frac{N}{2} \ln(2\pi) - \sum_{i=1}^N \ln(\sigma_i) - \frac{1}{2\sigma_i^2} \sum_{i=1}^N e_i^2 + (\lambda_0 - 1) \sum_{i=1}^N \ln(y_i)$$

where $e_i = y_i^{(\lambda_0)} - \mu_i$.

When the dependent variable is discrete, censored, or truncated, the Box-Cox transformation can be applied only to explanatory variables.

Bivariate Limited Dependent Variable Modeling

The generic form of a bivariate limited dependent variable model is

$$\begin{aligned} y_{1i}^* &= \mathbf{x}_{1i}'\boldsymbol{\beta}_1 + \epsilon_{1i} \\ y_{2i}^* &= \mathbf{x}_{2i}'\boldsymbol{\beta}_2 + \epsilon_{2i} \end{aligned}$$

where the disturbances, ϵ_{1i} and ϵ_{2i} , have joint normal distribution with zero mean, standard deviations σ_1 and σ_2 , and correlation of ρ . y_1^* and y_2^* are latent variables. The dependent variables y_1 and y_2 are observed if the latent variables y_1^* and y_2^* fall in certain ranges:

$$\begin{aligned} y_1 &= y_{1i} \text{ if } y_{1i}^* \in D_1(y_{1i}) \\ y_2 &= y_{2i} \text{ if } y_{2i}^* \in D_2(y_{2i}) \end{aligned}$$

D is a transformation from (y_{1i}^*, y_{2i}^*) to (y_{1i}, y_{2i}) . For example, if y_1 and y_2 are censored variables with lower bound 0, then

$$\begin{aligned} y_1 &= y_{1i} \text{ if } y_{1i}^* > 0, & y_1 &= 0 \text{ if } y_{1i}^* \leq 0 \\ y_2 &= y_{2i} \text{ if } y_{2i}^* > 0, & y_2 &= 0 \text{ if } y_{2i}^* \leq 0 \end{aligned}$$

There are three cases for the log likelihood of (y_{1i}, y_{2i}) . The first case is that $y_{1i} = y_{1i}^*$ and $y_{2i} = y_{2i}^*$. That is, this observation is mapped to one point in the space of latent variables. The log likelihood is computed from a bivariate normal density,

$$\ell_i = \ln \left[\phi_2 \left(\frac{y_1 - \mathbf{x}_1'\boldsymbol{\beta}_1}{\sigma_1}, \frac{y_2 - \mathbf{x}_2'\boldsymbol{\beta}_2}{\sigma_2}, \rho \right) \right] - \ln \sigma_1 - \ln \sigma_2$$

where $\phi_2(u, v, \rho)$ is the density function for standardized bivariate normal distribution with correlation ρ ,

$$\phi_2(u, v, \rho) = \frac{e^{-(1/2)(u^2 + v^2 - 2\rho uv)/(1 - \rho^2)}}{2\pi(1 - \rho^2)^{1/2}}$$

The second case is that one observed dependent variable is mapped to a point of its latent variable and the other dependent variable is mapped to a segment in the space of its latent variable. For example, in the bivariate censored model specified, if observed $y_1 > 0$ and $y_2 = 0$, then $y_1^* = y_1$ and $y_2^* \in (-\infty, 0]$. In general, the log likelihood for one observation can be written as follows (the subscript i is dropped for simplicity): If one set is a single point and the other set is a range, without loss of generality, let $D_1(y_1) = \{y_1\}$ and $D_2(y_2) = [L_2, R_2]$,

$$\begin{aligned} \ell_i = & \ln \left[\phi \left(\frac{y_1 - \mathbf{x}_1' \boldsymbol{\beta}_1}{\sigma_1} \right) \right] - \ln \sigma_1 \\ & + \ln \left[\Phi \left(\frac{R_2 - \mathbf{x}_2' \boldsymbol{\beta}_2 - \rho \frac{y_1 - \mathbf{x}_1' \boldsymbol{\beta}_1}{\sigma_1}}{\sigma_2} \right) - \Phi \left(\frac{L_2 - \mathbf{x}_2' \boldsymbol{\beta}_2 - \rho \frac{y_1 - \mathbf{x}_1' \boldsymbol{\beta}_1}{\sigma_1}}{\sigma_2} \right) \right] \end{aligned}$$

where ϕ and Φ are the density function and the cumulative probability function for standardized univariate normal distribution.

The third case is that both dependent variables are mapped to segments in the space of latent variables. For example, in the bivariate censored model specified, if observed $y_1 = 0$ and $y_2 = 0$, then $y_1^* \in (-\infty, 0]$ and $y_2^* \in (-\infty, 0]$. In general, if $D_1(y_1) = [L_1, R_1]$ and $D_2(y_2) = [L_2, R_2]$, the log likelihood is

$$\ell_i = \ln \int_{\frac{L_1 - \mathbf{x}_1' \boldsymbol{\beta}_1}{\sigma_1}}^{\frac{R_1 - \mathbf{x}_1' \boldsymbol{\beta}_1}{\sigma_1}} \int_{\frac{L_2 - \mathbf{x}_2' \boldsymbol{\beta}_2}{\sigma_2}}^{\frac{R_2 - \mathbf{x}_2' \boldsymbol{\beta}_2}{\sigma_2}} \phi_2(u, v, \rho) du dv$$

Selection Models

In sample selection models, one or several dependent variables are observed when another variable takes certain values. For example, the standard Heckman selection model can be defined as

$$\begin{aligned} z_i^* &= \mathbf{w}_i' \boldsymbol{\gamma} + u_i \\ z_i &= \begin{cases} 1 & \text{if } z_i^* > 0 \\ 0 & \text{if } z_i^* \leq 0 \end{cases} \\ y_i &= \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i \quad \text{if } z_i = 1 \end{aligned}$$

where u_i and ϵ_i are jointly normal with zero mean, standard deviations of 1 and σ , and correlation of ρ . z is the variable that the selection is based on, and y is observed when z has a value of 1. Least squares regression using the observed data of y produces inconsistent estimates of $\boldsymbol{\beta}$. Maximum likelihood method is used to estimate selection models. It is also possible to estimate these models by using Heckman's method, which is more computationally efficient. But it can be shown that the resulting estimates, although consistent, are not asymptotically efficient under normality assumption. Moreover, this method often violates the constraint on correlation coefficient $|\rho| \leq 1$.

The log-likelihood function of the Heckman selection model is written as

$$\begin{aligned} \ell = & \sum_{i \in \{z_i=0\}} \ln[1 - \Phi(\mathbf{w}_i' \boldsymbol{\gamma})] \\ & + \sum_{i \in \{z_i=1\}} \left\{ \ln \phi \left(\frac{y_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma} \right) - \ln \sigma + \ln \Phi \left(\frac{\mathbf{w}_i' \boldsymbol{\gamma} + \rho \frac{y_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma}}{\sqrt{1 - \rho^2}} \right) \right\} \end{aligned}$$

Only one variable is allowed for the selection to be based on, but the selection may lead to several variables. For example, in the following switching regression model,

$$\begin{aligned}
 z_i^* &= \mathbf{w}_i' \boldsymbol{\gamma} + u_i \\
 z_i &= \begin{cases} 1 & \text{if } z_i^* > 0 \\ 0 & \text{if } z_i^* \leq 0 \end{cases} \\
 y_{1i} &= \mathbf{x}_{1i}' \boldsymbol{\beta}_1 + \epsilon_{1i} \quad \text{if } z_i = 0 \\
 y_{2i} &= \mathbf{x}_{2i}' \boldsymbol{\beta}_2 + \epsilon_{2i} \quad \text{if } z_i = 1
 \end{aligned}$$

z is the variable that the selection is based on. If $z = 0$, then y_1 is observed. If $z = 1$, then y_2 is observed. Because it is never the case that y_1 and y_2 are observed at the same time, the correlation between y_1 and y_2 cannot be estimated. Only the correlation between z and y_1 and the correlation between z and y_2 can be estimated. This estimation uses the maximum likelihood method.

A brief example of the code for this model can be found in “[Example 22.4: Sample Selection Model](#)” on page 1499.

The Heckman selection model can include censoring or truncation. For a brief example of the code for these models see “[Example 22.5: Sample Selection Model with Truncation and Censoring](#)” on page 1501. The following example shows a variable y_i that is censored from below at zero.

$$\begin{aligned}
 z_i^* &= \mathbf{w}_i' \boldsymbol{\gamma} + u_i \\
 z_i &= \begin{cases} 1 & \text{if } z_i^* > 0 \\ 0 & \text{if } z_i^* \leq 0 \end{cases} \\
 y_i^* &= \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i \quad \text{if } z_i = 1 \\
 y_i &= \begin{cases} y_i^* & \text{if } y_i^* > 0 \\ 0 & \text{if } y_i^* \leq 0 \end{cases}
 \end{aligned}$$

In this case, the log-likelihood function of the Heckman selection model needs to be modified to include the censored region.

$$\begin{aligned}
 \ell &= \sum_{\{i|z_i=0\}} \ln[1 - \Phi(\mathbf{w}_i' \boldsymbol{\gamma})] \\
 &+ \sum_{\{i|z_i=1, y_i=y_i^*\}} \left\{ \ln \left[\phi \left(\frac{y_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma} \right) \right] - \ln \sigma + \ln \left[\Phi \left(\frac{\mathbf{w}_i' \boldsymbol{\gamma} + \rho \frac{y_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma}}{\sqrt{1 - \rho^2}} \right) \right] \right\} \\
 &+ \sum_{\{i|z_i=1, y_i=0\}} \ln \int_{-\infty}^{\frac{-\mathbf{x}_i' \boldsymbol{\beta}}{\sigma}} \int_{-\mathbf{w}_i' \boldsymbol{\gamma}}^{\infty} \phi_2(u, v, \rho) du dv
 \end{aligned}$$

In case y_i is truncated from below at zero instead of censored, the likelihood function can be written as

$$\begin{aligned} \ell = & \sum_{\{i|z_i=0\}} \ln[1 - \Phi(\mathbf{w}'_i \boldsymbol{\gamma})] \\ & + \sum_{\{i|z_i=1\}} \left\{ \ln \left[\phi \left(\frac{y_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma} \right) \right] - \ln \sigma + \ln \left[\Phi \left(\frac{\mathbf{w}'_i \boldsymbol{\gamma} + \rho \frac{y_i - \mathbf{x}'_i \boldsymbol{\beta}}{\sigma}}{\sqrt{1 - \rho^2}} \right) \right] - \ln [\Phi(\mathbf{x}'_i \boldsymbol{\beta} / \sigma)] \right\} \end{aligned}$$

Multivariate Limited Dependent Models

The multivariate model is similar to bivariate models. The generic form of the multivariate limited dependent variable model is

$$\begin{aligned} y_{1i}^* &= \mathbf{x}'_{1i} \boldsymbol{\beta}_1 + \epsilon_{1i} \\ y_{2i}^* &= \mathbf{x}'_{2i} \boldsymbol{\beta}_2 + \epsilon_{2i} \\ &\dots \\ y_{mi}^* &= \mathbf{x}'_{mi} \boldsymbol{\beta}_m + \epsilon_{mi} \end{aligned}$$

where m is the number of models to be estimated. The vector ϵ has multivariate normal distribution with mean 0 and variance-covariance matrix Σ . Similar to bivariate models, the likelihood may involve computing multivariate normal integrations. This is done using Monte Carlo integration. (See Genz (1992) and Hajivassiliou and McFadden (1998).)

When the number of equations, N , increases in a system, the number of parameters increases at the rate of N^2 because of the correlation matrix. When the number of parameters is large, sometimes the optimization converges but some of the standard deviations are missing. This usually means that the model is over-parameterized. The default method for computing the covariance is to use the inverse Hessian matrix. The Hessian is computed by finite differences, and in over-parameterized cases, the inverse cannot be computed. It is recommended that you reduce the number of parameters in such cases. Sometimes using the outer product covariance matrix (COVEST=OP option) may also help.

Tests on Parameters

Tests on Parameters

In general, the hypothesis tested can be written as

$$H_0 : \mathbf{h}(\theta) = 0$$

where $\mathbf{h}(\theta)$ is an r by 1 vector valued function of the parameters θ given by the r expressions specified in the TEST statement.

Let \hat{V} be the estimate of the covariance matrix of $\hat{\theta}$. Let $\hat{\theta}$ be the unconstrained estimate of θ and $\tilde{\theta}$ be the constrained estimate of θ such that $h(\tilde{\theta}) = 0$. Let

$$A(\theta) = \partial h(\theta) / \partial \theta \mid_{\hat{\theta}}$$

Using this notation, the test statistics for the three kinds of tests are computed as follows.

The Wald test statistic is defined as

$$W = h'(\hat{\theta}) \left(A(\hat{\theta}) \hat{V} A'(\hat{\theta}) \right)^{-1} h(\hat{\theta})$$

The Wald test is not invariant to reparameterization of the model (Gregory 1985; Gallant 1987, p. 219). For more information about the theoretical properties of the Wald test, see Phillips and Park (1988).

The Lagrange multiplier test statistic is

$$LM = \lambda' A(\tilde{\theta}) \tilde{V} A'(\tilde{\theta}) \lambda$$

where λ is the vector of Lagrange multipliers from the computation of the restricted estimate $\tilde{\theta}$.

The likelihood ratio test statistic is

$$LR = 2 \left(L(\hat{\theta}) - L(\tilde{\theta}) \right)$$

where $\tilde{\theta}$ represents the constrained estimate of θ and L is the concentrated log-likelihood value.

For each kind of test, under the null hypothesis the test statistic is asymptotically distributed as a χ^2 random variable with r degrees of freedom, where r is the number of expressions in the TEST statement. The p -values reported for the tests are computed from the $\chi^2(r)$ distribution and are only asymptotically valid.

Monte Carlo simulations suggest that the asymptotic distribution of the Wald test is a poorer approximation to its small sample distribution than that of the other two tests. However, the Wald test has the lowest computational cost, since it does not require computation of the constrained estimate $\tilde{\theta}$.

The following is an example of using the TEST statement to perform a likelihood ratio test:

```
proc qlim;
  model y = x1 x2 x3;
  test x1 = 0, x2 * .5 + 2 * x3 = 0 /lr;
run;
```

Output to SAS Data Set

XBeta, Predicted, Residual

Xbeta is the structural part on the right-hand side of the model. Predicted value is the predicted dependent variable value. For censored variables, if the predicted value is outside the boundaries, it is reported as the closest boundary. For discrete variables, it is the level whose boundaries Xbeta falls between. Residual is defined only for continuous variables and is defined as

$$Residual = Observed - Predicted$$

Error Standard Deviation

Error standard deviation is σ_i in the model. It varies only when the HETERO statement is used.

Marginal Effects

Marginal effect is defined as a contribution of one control variable to the response variable. For the binary choice model with two response categories, $\mu_0 = -\infty$, $\mu_1 = 0$, $\mu_0 = -\infty$; and ordinal response model with M response categories, μ_0, \dots, μ_M , define

$$R_{i,j} = \mu_j - \mathbf{x}_i' \boldsymbol{\beta}$$

The probability that the unobserved dependent variable is contained in the j th category can be written as

$$P[\mu_{j-1} < y_i^* \leq \mu_j] = F(R_{i,j}) - F(R_{i,j-1})$$

The marginal effect of changes in the regressors on the probability of $y_i = j$ is then

$$\frac{\partial \text{Prob}[y_i = j]}{\partial \mathbf{x}} = [f(\mu_{j-1} - \mathbf{x}_i' \boldsymbol{\beta}) - f(\mu_j - \mathbf{x}_i' \boldsymbol{\beta})] \boldsymbol{\beta}$$

where $f(x) = \frac{dF(x)}{dx}$. In particular,

$$f(x) = \frac{dF(x)}{dx} = \begin{cases} \frac{1}{\sqrt{2\pi}} e^{-x^2/2} & (\text{probit}) \\ \frac{e^{-x}}{[1+e^{(-x)}]^2} & (\text{logit}) \end{cases}$$

The marginal effects in the Box-Cox regression model are

$$\frac{\partial E[y_i]}{\partial \mathbf{x}} = \boldsymbol{\beta} \frac{x^{\lambda_k-1}}{y^{\lambda_0-1}}$$

The marginal effects in the truncated regression model are

$$\frac{\partial E[y_i | L_i < y_i^* < R_i]}{\partial \mathbf{x}} = \boldsymbol{\beta} \left[1 - \frac{(\phi(a_i) - \phi(b_i))^2}{(\Phi(b_i) - \Phi(a_i))^2} + \frac{a_i \phi(a_i) - b_i \phi(b_i)}{\Phi(b_i) - \Phi(a_i)} \right]$$

where $a_i = \frac{L_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma_i}$ and $b_i = \frac{R_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma_i}$.

The marginal effects in the censored regression model are

$$\frac{\partial E[y | \mathbf{x}_i]}{\partial \mathbf{x}} = \boldsymbol{\beta} \times \text{Prob}[L_i < y_i^* < R_i]$$

Inverse Mills Ratio, Expected and Conditionally Expected Values

Expected and conditionally expected values are computed only for continuous variables. The inverse Mills ratio is computed for censored or truncated continuous, binary discrete, and selection endogenous variables.

Let L_i and R_i be the lower boundary and upper boundary, respectively, for the y_i . Define $a_i = \frac{L_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma_i}$ and $b_i = \frac{R_i - \mathbf{x}_i' \boldsymbol{\beta}}{\sigma_i}$. Then the inverse Mills ratio is defined as

$$\lambda = \frac{(\phi(a_i) - \phi(b_i))}{(\Phi(b_i) - \Phi(a_i))}$$

for a continuous variable and defined as

$$\lambda = \frac{\phi(\mathbf{x}_i' \boldsymbol{\beta})}{\Phi(\mathbf{x}_i' \boldsymbol{\beta})}$$

for a binary discrete variable.

The expected value is the unconditional expectation of the dependent variable. For a censored variable, it is

$$E[y_i] = \Phi(a_i)L_i + (\mathbf{x}_i' \boldsymbol{\beta} + \lambda \sigma_i)(\Phi(b_i) - \Phi(a_i)) + (1 - \Phi(b_i))R_i$$

For a left-censored variable ($R_i = \infty$), this formula is

$$E[y_i] = \Phi(a_i)L_i + (\mathbf{x}_i' \boldsymbol{\beta} + \lambda \sigma_i)(1 - \Phi(a_i))$$

where $\lambda = \frac{\phi(a_i)}{1 - \Phi(a_i)}$.

For a right-censored variable ($L_i = -\infty$), this formula is

$$E[y_i] = (\mathbf{x}_i' \boldsymbol{\beta} + \lambda \sigma_i)\Phi(b_i) + (1 - \Phi(b_i))R_i$$

where $\lambda = -\frac{\phi(b_i)}{\Phi(b_i)}$.

For a noncensored variable, this formula is

$$E[y_i] = \mathbf{x}_i' \boldsymbol{\beta}$$

The conditional expected value is the expectation given that the variable is inside the boundaries:

$$E[y_i | L_i < y_i < R_i] = \mathbf{x}_i' \boldsymbol{\beta} + \lambda \sigma_i$$

Probability

Probability applies only to discrete responses. It is the marginal probability that the discrete response is taking the value of the observation. If the PROBALL option is specified, then the probability for all of the possible responses of the discrete variables is computed.

Technical Efficiency

Technical efficiency for each producer is computed only for stochastic frontier models.

In general, the stochastic production frontier can be written as

$$y_i = f(x_i; \boldsymbol{\beta}) \exp\{v_i\} TE_i$$

where y_i denotes producer i 's actual output, $f(\cdot)$ is the deterministic part of production frontier, $\exp\{v_i\}$ is a producer-specific error term, and TE_i is the technical efficiency coefficient, which can be written as

$$TE_i = \frac{y_i}{f(x_i; \beta) \exp\{v_i\}}.$$

In the case of a Cobb-Douglas production function, $TE_i = \exp\{-u_i\}$. See the section “[Stochastic Frontier Production and Cost Models](#)” on page 1478.

Cost frontier can be written in general as

$$E_i = c(y_i, w_i; \beta) \exp\{v_i\} / CE_i$$

where w_i denotes producer i 's input prices, $c(\cdot)$ is the deterministic part of cost frontier, $\exp\{v_i\}$ is a producer-specific error term, and CE_i is the cost efficiency coefficient, which can be written as

$$CE_i = \frac{c(x_i, w_i; \beta) \exp\{v_i\}}{E_i}$$

In the case of a Cobb-Douglas cost function, $CE_i = \exp\{-u_i\}$. See the section “[Stochastic Frontier Production and Cost Models](#)” on page 1478. Hence, both technical and cost efficiency coefficients are the same. The estimates of technical efficiency are provided in the following subsections.

Normal-Half Normal Model

Define $\mu_* = -\epsilon\sigma_u^2/\sigma^2$ and $\sigma_*^2 = \sigma_u^2\sigma_v^2/\sigma^2$. Then, as it is shown by Jondrow et al. (1982), conditional density is as follows:

$$f(u|\epsilon) = \frac{f(u, \epsilon)}{f(\epsilon)} = \frac{1}{\sqrt{2\pi}\sigma_*} \exp\left\{-\frac{(u - \mu_*)^2}{2\sigma_*^2}\right\} \Bigg/ \left[1 - \Phi\left(-\frac{\mu_*}{\sigma_*}\right)\right]$$

Hence, $f(u|\epsilon)$ is the density for $N^+(\mu_*, \sigma_*^2)$.

Using this result, it follows that the estimate of technical efficiency (Battese and Coelli, 1988) is

$$TE1_i = E(\exp\{-u_i\}|\epsilon_i) = \left[\frac{1 - \Phi(\sigma_* - \mu_{*i}/\sigma_*)}{1 - \Phi(-\mu_{*i}/\sigma_*)} \right] \exp\left\{-\mu_{*i} + \frac{1}{2}\sigma_*^2\right\}$$

The second version of the estimate (Jondrow et al., 1982) is

$$TE2_i = \exp\{-E(u_i|\epsilon_i)\}$$

where

$$E(u_i|\epsilon_i) = \mu_{*i} + \sigma_* \left[\frac{\phi(-\mu_{*i}/\sigma_*)}{1 - \Phi(-\mu_{*i}/\sigma_*)} \right] = \sigma_* \left[\frac{\phi(\epsilon_i\lambda/\sigma)}{1 - \Phi(\epsilon_i\lambda/\sigma)} - \left(\frac{\epsilon_i\lambda}{\sigma}\right) \right]$$

Normal-Exponential Model

Define $A = -\tilde{\mu}/\sigma_v$ and $\tilde{\mu} = -\epsilon - \sigma_v^2/\sigma_u$. Then, as it is shown by Kumbhakar and Lovell (2000), conditional density is as follows:

$$f(u|\epsilon) = \frac{1}{\sqrt{2\pi}\sigma_v\Phi(-\tilde{\mu}/\sigma_v)} \exp\left\{-\frac{(u - \tilde{\mu})^2}{2\sigma^2}\right\}$$

Hence, $f(u|\epsilon)$ is the density for $N^+(\tilde{\mu}, \sigma_v^2)$.

Using this result, it follows that the estimate of technical efficiency is

$$TE1_i = E(\exp\{-u_i\}|\epsilon_i) = \left[\frac{1 - \Phi(\sigma_v - \tilde{\mu}_i/\sigma_v)}{1 - \Phi(-\tilde{\mu}_i/\sigma_v)} \right] \exp \left\{ -\tilde{\mu}_i + \frac{1}{2}\sigma_v^2 \right\}$$

The second version of the estimate is

$$TE2_i = \exp\{-E(u_i|\epsilon_i)\}$$

where

$$E(u_i|\epsilon_i) = \tilde{\mu}_i + \sigma_v \left[\frac{\phi(-\tilde{\mu}_i/\sigma_v)}{1 - \Phi(-\tilde{\mu}_i/\sigma_v)} \right] = \sigma_v \left[\frac{\phi(A)}{\Phi(-A)} - A \right]$$

Normal-Truncated Normal Model

Define $\tilde{\mu} = (-\sigma_u^2\epsilon_i + \mu\sigma_v^2)/\sigma^2$ and $\sigma_*^2 = \sigma_u^2\sigma_v^2/\sigma^2$. Then, as it is shown by Kumbhakar and Lovell (2000), conditional density is as follows:

$$f(u|\epsilon) = \frac{1}{\sqrt{2\pi}\sigma_*[1 - \Phi(-\tilde{\mu}/\sigma_*)]} \exp \left\{ -\frac{(u - \tilde{\mu})^2}{2\sigma_*^2} \right\}$$

Hence, $f(u|\epsilon)$ is the density for $N^+(\tilde{\mu}, \sigma_*^2)$.

Using this result, it follows that the estimate of technical efficiency is

$$TE1_i = E(\exp\{-u_i\}|\epsilon_i) = \frac{1 - \Phi(\sigma_* - \tilde{\mu}_i/\sigma_*)}{1 - \Phi(-\tilde{\mu}_i/\sigma_*)} \exp \left\{ -\tilde{\mu}_i + \frac{1}{2}\sigma_*^2 \right\}$$

The second version of the estimate is

$$TE2_i = \exp\{-E(u_i|\epsilon_i)\}$$

where

$$E(u_i|\epsilon_i) = \tilde{\mu}_i + \sigma_* \left[\frac{\phi(\tilde{\mu}_i/\sigma_*)}{1 - \Phi(-\tilde{\mu}_i/\sigma_*)} \right]$$

OUTEST= Data Set

The OUTEST= data set contains all the parameters estimated in a MODEL statement. The OUTEST= option can be used when the PROC QLIM call contains one MODEL statement:

```
proc qlim data=a outest=e;
  model y = x1 x2 x3;
  endogenous y ~ censored(lb=0);
run;
```

Each parameter contains the estimate for the corresponding parameter in the corresponding model. In addition, the OUTEST= data set contains the following variables:

<code>_NAME_</code>	the name of the independent variable
<code>_TYPE_</code>	type of observation. PARM indicates the row of coefficients; STD indicates the row of standard deviations of the corresponding coefficients.
<code>_STATUS_</code>	convergence status for optimization

The rest of the columns correspond to the explanatory variables.

The OUTEST= data set contains one observation for the MODEL statement, giving the parameter estimates for that model. If the COVOUT option is specified, the OUTEST= data set includes additional observations for the MODEL statement, giving the rows of the covariance matrix of parameter estimates. For covariance observations, the value of the `_TYPE_` variable is COV, and the `_NAME_` variable identifies the parameter associated with that row of the covariance matrix. If the CORROUT option is specified, the OUTEST= data set includes additional observations for the MODEL statement, giving the rows of the correlation matrix of parameter estimates. For correlation observations, the value of the `_TYPE_` variable is CORR, and the `_NAME_` variable identifies the parameter associated with that row of the correlation matrix.

Naming

Naming of Parameters

When there is only one equation in the estimation, parameters are named in the same way as in other SAS procedures such as REG, PROBIT, and so on. The constant in the regression equation is called Intercept. The coefficients on independent variables are named by the independent variables. The standard deviation of the errors is called `_Sigma`. If there are Box-Cox transformations, the coefficients are named `_Lambdai`, where i increments from 1, or as specified by the user. The limits for the discrete dependent variable are named `_Limiti`. If the LIMIT=varying option is specified, then `_Limiti` starts from 1. If the LIMIT=varying option is not specified, then `_Limit1` is set to 0 and the limit parameters start from $i = 2$. If the HETERO statement is included, the coefficients of the independent variables in the hetero equation are called `_H.x`, where x is the name of the independent variable. If the parameter name includes interaction terms, it needs to be enclosed in quotation marks followed by N . The following example restricts the parameter that includes the interaction term to be greater than zero:

```
proc qlim data=a;
  model y = x1|x2;
  endogenous y ~ discrete;
  restrict "x1*x2"N>0;
run;
```

When there are multiple equations in the estimation, the parameters in the main equation are named in the format of `y.x`, where y is the name of the dependent variable and x is the name of the independent variable. The standard deviation of the errors is called `_Sigma.y`. The correlation of the errors is called

_Rho for bivariate model. For the model with three variables it is _Rho.y1.y2, _Rho.y1.y3, _Rho.y2.y3. The construction of correlation names for multivariate models is analogous. Box-Cox parameters are called _Lambda*i*.y and limit variables are called _Limit*i*.y. Parameters in the HETERO statement are named as _H.y.x. In the OUTEST= data set, all variables are changed from '.' to '_'.

Naming of Output Variables

The following table shows the option in the OUTPUT statement, with the corresponding variable names and their explanation.

Option	Name	Explanation
PREDICTED	P_y	Predicted value of y
RESIDUAL	RESID_y	Residual of y , (y -PredictedY)
XBETA	XBETA_y	Structure part ($\mathbf{x}'\boldsymbol{\beta}$) of y equation
ERRSTD	ERRSTD_y	Standard deviation of error term
PROB	PROB_y	Probability that y is taking the observed value in this observation (discrete y only)
PROBALL	PROB <i>i</i> _y	Probability that y is taking the i th value (discrete y only)
MILLS	MILLS_y	Inverse Mills ratio for y
EXPECTED	EXPCT_y	Unconditional expected value of y
CONDITIONAL	CEXPCT_y	Conditional expected value of y , condition on the truncation.
MARGINAL	MEFF_x	Marginal effect of x on y ($\frac{\partial y}{\partial x}$) with single equation
	MEFF_y_x	Marginal effect of x on y ($\frac{\partial y}{\partial x}$) with multiple equations
	MEFF_Pi_x	Marginal effect of x on y ($\frac{\partial Prob(y=i)}{\partial x}$) with single equation and discrete y
	MEFF_Pi_y_x	Marginal effect of x on y ($\frac{\partial Prob(y=i)}{\partial x}$) with multiple equations and discrete y
TE1	TE1	Technical efficiency estimate for each producer proposed by Battese and Coelli (1988)
TE2	TE2	Technical efficiency estimate for each producer proposed by Jondrow et al. (1982)

If you prefer to name the output variables differently, you can use the RENAME option in the data set. For example, the following statements rename the residual of y as *Resid*:

```
proc qlim data=one;
  model y = x1-x10 / censored;
  output out=outds(rename=(resid_y=resid)) residual;
run;
```

ODS Table Names

PROC QLIM assigns a name to each table it creates. You can use these names to denote the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the [Table 22.2](#).

Table 22.2 ODS Tables Produced in PROC QLIM by the MODEL Statement and TEST Statement

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement and TEST Statement		
ResponseProfile	Response profile	default
ClassLevels	Class levels	default
FitSummary	Summary of nonlinear estimation	default
GoodnessOfFit	Pseudo-R-square measures	default
ConvergenceStatus	Convergence status	default
ParameterEstimates	Parameter estimates	default
SummaryContResponse	Summary of continuous response	default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlation of parameter estimates	CORRB
LinCon	Linear constraints	ITPRINT
InputOptions	Input options	ITPRINT
ProblemDescription	Problem description	ITPRINT
IterStart	Optimization start summary	ITPRINT
IterHist	Iteration history	ITPRINT
IterStop	Optimization results	ITPRINT
ConvergenceStatus	Convergence status	ITPRINT
ParameterEstimatesStart	Optimization start	ITPRINT
ParameterEstimatesResults	Resulting parameters	ITPRINT
LinConSol	Linear constraints evaluated at solution	ITPRINT
ODS Tables Created by the TEST Statement		
TestResults	Test results	default

Examples: QLIM Procedure

Example 22.1: Ordered Data Modeling

Cameron and Trivedi (1986) studied Australian Health Survey data. Variable definitions are given in Cameron and Trivedi (1998, p. 68).

The dependent variable, `dvisits`, has nine ordered values. The following SAS statements estimate the ordinal probit model:

```
/*-- Ordered Discrete Responses --*/
proc qlim data=docvisit;
    model dvisits = sex age agesq income levyplus
                  freepoor freerepa illness actdays hscore
                  chcond1 chcond2 / discrete;
run;
```

The output of the QLIM procedure for ordered data modeling is shown in [Output 22.1.1](#).

Output 22.1.1 Ordered Data Modeling

Binary Data		
The QLIM Procedure		
Discrete Response Profile of dvisits		
Index	Value	Total Frequency
1	0	4141
2	1	782
3	2	174
4	3	30
5	4	24
6	5	9
7	6	12
8	7	12
9	8	6

Output 22.1.1 *continued*

Model Fit Summary					
Number of Endogenous Variables		1			
Endogenous Variable		dvisits			
Number of Observations		5190			
Log Likelihood		-3138			
Maximum Absolute Gradient		0.0003675			
Number of Iterations		82			
Optimization Method		Quasi-Newton			
AIC		6316			
Schwarz Criterion		6447			
Goodness-of-Fit Measures					
Measure	Value	Formula			
Likelihood Ratio (R)	789.73	$2 * (\text{LogL} - \text{LogL0})$			
Upper Bound of R (U)	7065.9	$- 2 * \text{LogL0}$			
Aldrich-Nelson	0.1321	$R / (R+N)$			
Cragg-Uhler 1	0.1412	$1 - \exp(-R/N)$			
Cragg-Uhler 2	0.1898	$(1 - \exp(-R/N)) / (1 - \exp(-U/N))$			
Estrella	0.149	$1 - (1 - R/U)^{(U/N)}$			
Adjusted Estrella	0.1416	$1 - ((\text{LogL} - K) / \text{LogL0})^{(-2/N * \text{LogL0})}$			
McFadden's LRI	0.1118	R / U			
Veall-Zimmermann	0.2291	$(R * (U+N)) / (U * (R+N))$			
McKelvey-Zavoina	0.2036				
N = # of observations, K = # of regressors					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.378705	0.147413	-9.35	<.0001
sex	1	0.131885	0.043785	3.01	0.0026
age	1	-0.534190	0.815907	-0.65	0.5126
agesq	1	0.857308	0.898364	0.95	0.3399
income	1	-0.062211	0.068017	-0.91	0.3604
levyplus	1	0.137030	0.053262	2.57	0.0101
freepoor	1	-0.346045	0.129638	-2.67	0.0076
freerepa	1	0.178382	0.074348	2.40	0.0164
illness	1	0.150485	0.015747	9.56	<.0001
actdays	1	0.100575	0.005850	17.19	<.0001
hscore	1	0.031862	0.009201	3.46	0.0005
chcond1	1	0.061601	0.049024	1.26	0.2089
chcond2	1	0.135321	0.067711	2.00	0.0457
_Limit2	1	0.938884	0.031219	30.07	<.0001
_Limit3	1	1.514288	0.049329	30.70	<.0001
_Limit4	1	1.711660	0.058151	29.43	<.0001
_Limit5	1	1.952860	0.072014	27.12	<.0001
_Limit6	1	2.087422	0.081655	25.56	<.0001
_Limit7	1	2.333786	0.101760	22.93	<.0001
_Limit8	1	2.789796	0.156189	17.86	<.0001

By default, ordinal probit/logit models are estimated assuming that the first threshold or limit parameter (μ_1) is 0. However, this parameter can also be estimated when the LIMIT1=VARYING option is specified. The probability that y_i^* belongs to the j th category is defined as

$$P[\mu_{j-1} < y_i^* < \mu_j] = F(\mu_j - \mathbf{x}_i' \boldsymbol{\beta}) - F(\mu_{j-1} - \mathbf{x}_i' \boldsymbol{\beta})$$

where $F(\cdot)$ is the logistic or standard normal CDF, $\mu_0 = -\infty$ and $\mu_9 = \infty$. [Output 22.1.2](#) lists ordinal probit estimates computed in the following program. Note that the intercept term is suppressed for model identification when μ_1 is estimated.

```
/*-- Ordered Probit --*/
proc qlim data=docvisit;
  model dvisits = sex age agesq income levyplus
             freepoor freerepa illness actdays hscore
             chcond1 chcond2 / discrete(d=normal) limit1=varying;
run;
```

Output 22.1.2 Ordinal Probit Parameter Estimates with LIMIT1=VARYING

Binary Data					
The QLIM Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
sex	1	0.131885	0.043785	3.01	0.0026
age	1	-0.534181	0.815915	-0.65	0.5127
agesq	1	0.857298	0.898371	0.95	0.3399
income	1	-0.062211	0.068017	-0.91	0.3604
levyplus	1	0.137031	0.053262	2.57	0.0101
freepoor	1	-0.346045	0.129638	-2.67	0.0076
freerepa	1	0.178382	0.074348	2.40	0.0164
illness	1	0.150485	0.015747	9.56	<.0001
actdays	1	0.100575	0.005850	17.19	<.0001
hscore	1	0.031862	0.009201	3.46	0.0005
chcond1	1	0.061602	0.049024	1.26	0.2089
chcond2	1	0.135322	0.067711	2.00	0.0457
_Limit1	1	1.378706	0.147415	9.35	<.0001
_Limit2	1	2.317590	0.150206	15.43	<.0001
_Limit3	1	2.892994	0.155198	18.64	<.0001
_Limit4	1	3.090367	0.158263	19.53	<.0001
_Limit5	1	3.331566	0.164065	20.31	<.0001
_Limit6	1	3.466128	0.168799	20.53	<.0001
_Limit7	1	3.712493	0.179756	20.65	<.0001
_Limit8	1	4.168502	0.215738	19.32	<.0001

Example 22.2: Tobit Analysis

The following statements show a subset of the Mroz (1987) data set. In these data, Hours is the number of hours the wife worked outside the household in a given year, Yrs_Ed is the years of education, and Yrs_Exp is the years of work experience. A Tobit model will be fit to the hours worked with years of education and experience as covariates.

By the nature of the data it is clear that there are a number of women who committed some positive number of hours to outside work ($y_i > 0$ is observed). There are also a number of women who did not work at all ($y_i = 0$ is observed). This gives us the following model:

$$y_i^* = \mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i$$

$$y_i = \begin{cases} y_i^* & \text{if } y_i^* > 0 \\ 0 & \text{if } y_i^* \leq 0 \end{cases}$$

where $\epsilon_i \sim iidN(0, \sigma^2)$. The set of explanatory variables is denoted by \mathbf{x}_i .

```

title1 'Estimating a Tobit model';

data subset;
  input Hours Yrs_Ed Yrs_Exp @@;
  if Hours eq 0 then Lower=.;
  else          Lower=Hours;
datalines;
0 8 9 0 8 12 0 9 10 0 10 15 0 11 4 0 11 6
1000 12 1 1960 12 29 0 13 3 2100 13 36
3686 14 11 1920 14 38 0 15 14 1728 16 3
1568 16 19 1316 17 7 0 17 15
;

/*-- Tobit Model --*/
proc qlim data=subset;
  model hours = yrs_ed yrs_exp;
  endogenous hours ~ censored(lb=0);
run;

```

The output of the QLIM procedure is shown in [Output 22.2.1](#).

Output 22.2.1 Tobit Analysis Results

Estimating a Tobit model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables				1	
Endogenous Variable				Hours	
Number of Observations				17	
Log Likelihood				-74.93700	
Maximum Absolute Gradient				1.18953E-6	
Number of Iterations				23	
Optimization Method				Quasi-Newton	
AIC				157.87400	
Schwarz Criterion				161.20685	
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-5598.295129	27.692220	-202.16	<.0001
Yrs_Ed	1	373.123254	53.988877	6.91	<.0001
Yrs_Exp	1	63.336247	36.551299	1.73	0.0831
_Sigma	1	1582.859635	390.076480	4.06	<.0001

In the “Parameter Estimates” table there are four rows. The first three of these rows correspond to the vector estimate of the regression coefficients β . The last one is called `_Sigma`, which corresponds to the estimate of the error variance σ .

Example 22.3: Bivariate Probit Analysis

This example shows how to estimate a bivariate probit model. Note the `INIT` statement in the following program, which sets the initial values for some parameters in the optimization:

```
data a;
  keep y1 y2 x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    y1l = 1 + 2 * x1 + 3 * x2 + u1;
    y2l = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    if ( y1l > 0 ) then y1 = 1;
    else y1 = 0;
    if ( y2l > 0 ) then y2 = 1;
    else y2 = 0;
  end;
end;
```

```

        output;
    end;
run;

/*-- Bivariate Probit --*/
proc qlim data=a method=qn;
    init y1.x1 2.8, y1.x2 2.1, _rho .1;
    model y1 = x1 x2;
    model y2 = x1 x2;
    endogenous y1 y2 ~ discrete;
run;

```

The output of the QLIM procedure is shown in [Output 22.3.1](#).

Output 22.3.1 Bivariate Probit Analysis Results

Estimating a Tobit model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables		2			
Endogenous Variable		y1 y2			
Number of Observations		500			
Log Likelihood		-134.90796			
Maximum Absolute Gradient		3.23363E-7			
Number of Iterations		17			
Optimization Method		Quasi-Newton			
AIC		283.81592			
Schwarz Criterion		313.31817			
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y1.Intercept	1	1.003639	0.153678	6.53	<.0001
y1.x1	1	2.244374	0.256062	8.76	<.0001
y1.x2	1	3.273441	0.341581	9.58	<.0001
y2.Intercept	1	3.621164	0.457173	7.92	<.0001
y2.x1	1	4.551525	0.576547	7.89	<.0001
y2.x2	1	-2.442769	0.332295	-7.35	<.0001
_Rho	1	0.144097	0.336459	0.43	0.6685

Example 22.4: Sample Selection Model

This example illustrates the use of PROC QLIM for sample selection models. The data set is the same one from Mroz (1987). The goal is to estimate a wage offer function for married women, accounting for potential selection bias. Of the 753 women, the wage is observed for 428 working women. The labor force participation equation estimated in the introductory example is used for selection. The wage equation

uses log wage (lwage) as the dependent variable. The explanatory variables in the wage equation are the woman's years of schooling (educ), wife's labor experience (exper), and square of experience (expersq). The program is as follows:

```

/*-- Sample Selection --*/
proc qlim data=mroz;
  model inlf = nwifeinc educ exper expersq
           age kidslt6 kidsge6 /discrete;
  model lwage = educ exper expersq / select(inlf=1);
run;

```

The output of the QLIM procedure is shown in [Output 22.4.1](#).

Output 22.4.1 Sample Selection

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables		2			
Endogenous Variable		inlf lwage			
Number of Observations		753			
Log Likelihood		-832.88509			
Maximum Absolute Gradient		0.00502			
Number of Iterations		78			
Optimization Method		Quasi-Newton			
AIC		1694			
Schwarz Criterion		1759			
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
lwage.Intercept	1	-0.552716	0.260371	-2.12	0.0338
lwage.educ	1	0.108351	0.014861	7.29	<.0001
lwage.exper	1	0.042837	0.014878	2.88	0.0040
lwage.expersq	1	-0.000837	0.000417	-2.01	0.0449
_Sigma.lwage	1	0.663397	0.022706	29.22	<.0001
inlf.Intercept	1	0.266459	0.508954	0.52	0.6006
inlf.nwifeinc	1	-0.012132	0.004877	-2.49	0.0129
inlf.educ	1	0.131341	0.025383	5.17	<.0001
inlf.exper	1	0.123282	0.018728	6.58	<.0001
inlf.expersq	1	-0.001886	0.000601	-3.14	0.0017
inlf.age	1	-0.052829	0.008479	-6.23	<.0001
inlf.kidslt6	1	-0.867398	0.118647	-7.31	<.0001
inlf.kidsge6	1	0.035872	0.043476	0.83	0.4093
_Rho	1	0.026617	0.147073	0.18	0.8564

Note the correlation estimate is insignificant. This indicates that selection bias is not a big problem in the estimation of wage equation.

Example 22.5: Sample Selection Model with Truncation and Censoring

In this example the data are generated such that the selection variable is discrete and the variable Y is truncated from below by zero. The program follows, with the results shown in [Output 22.5.1](#):

```
data trunc;
  keep z y x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    z1 = 1 + 2 * x1 + 3 * x2 + u1;
    y = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    if ( z1 > 0 ) then z = 1;
    else z = 0;
    if y>=0 then output;
  end;
run;

/*-- Sample Selection with Truncation --*/
proc qlim data=trunc method=qn;
  model z = x1 x2 / discrete;
  model y = x1 x2 / select(z=1) truncated(lb=0);
run;
```

Output 22.5.1 Sample Selection with Truncation

Binary Data	
The QLIM Procedure	
Model Fit Summary	
Number of Endogenous Variables	2
Endogenous Variable	z y
Number of Observations	379
Log Likelihood	-344.10722
Maximum Absolute Gradient	4.95535E-6
Number of Iterations	17
Optimization Method	Quasi-Newton
AIC	704.21444
Schwarz Criterion	735.71473

Output 22.5.1 *continued*

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y.Intercept	1	3.014158	0.128548	23.45	<.0001
y.x1	1	3.995671	0.099599	40.12	<.0001
y.x2	1	-1.972697	0.096385	-20.47	<.0001
_Sigma.y	1	0.923428	0.047233	19.55	<.0001
z.Intercept	1	0.949444	0.190265	4.99	<.0001
z.x1	1	2.163928	0.288384	7.50	<.0001
z.x2	1	3.134213	0.379251	8.26	<.0001
_Rho	1	0.494356	0.176542	2.80	0.0051

In the following statements the data are generated such that the selection variable is discrete and the variable *Y* is censored from below by zero. The results are shown in [Output 22.5.2](#).

```
data cens;
  keep z y x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    z1 = 1 + 2 * x1 + 3 * x2 + u1;
    y1 = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    if ( z1 > 0 ) then z = 1;
    else z = 0;
    if ( y1 > 0 ) then y = y1;
    else y = 0;
    output;
  end;
run;

/*-- Sample Selection with Censoring --*/
proc qlim data=cens method=qn;
  model z = x1 x2 / discrete;
  model y = x1 x2 / select(z=1) censored(lb=0);
run;
```


Output 22.5.2 Sample Selection with Censoring

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables	2				
Endogenous Variable	z y				
Number of Observations	500				
Log Likelihood	-399.78508				
Maximum Absolute Gradient	2.30443E-6				
Number of Iterations	19				
Optimization Method	Quasi-Newton				
AIC	815.57015				
Schwarz Criterion	849.28702				
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y.Intercept	1	3.074276	0.111617	27.54	<.0001
y.x1	1	3.963619	0.085796	46.20	<.0001
y.x2	1	-2.023548	0.088714	-22.81	<.0001
_Sigma.y	1	0.920860	0.043278	21.28	<.0001
z.Intercept	1	1.013610	0.154081	6.58	<.0001
z.x1	1	2.256922	0.255999	8.82	<.0001
z.x2	1	3.302692	0.342168	9.65	<.0001
_Rho	1	0.350776	0.197093	1.78	0.0751

Example 22.6: Types of Tobit Models

The following five examples show how to estimate different types of Tobit models (see “Types of Tobit Models” on page 1475). [Output 22.6.1](#) through [Output 22.6.5](#) show the results of the corresponding programs.

Type 1 Tobit

```
data a1;
  keep y x;
  do i = 1 to 500;
    x = rannor( 19283 );
    u = rannor( 19283 );
    y1 = 1 + 2 * x + u;
    if ( y1 > 0 ) then y = y1;
    else y = 0;
    output;
  end;
run;
```

```

/*-- Type 1 Tobit --*/
proc qlim data=a1 method=qn;
  model y = x;
  endogenous y ~ censored(lb=0);
run;

```

Output 22.6.1 Type 1 Tobit

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables		1			
Endogenous Variable		y			
Number of Observations		500			
Log Likelihood		-554.17696			
Maximum Absolute Gradient		4.65556E-7			
Number of Iterations		9			
Optimization Method		Quasi-Newton			
AIC		1114			
Schwarz Criterion		1127			
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.942734	0.056784	16.60	<.0001
x	1	2.049571	0.066979	30.60	<.0001
_Sigma	1	1.016571	0.039035	26.04	<.0001

Type 2 Tobit

```

data a2;
  keep y1 y2 x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    y1l = 1 + 2 * x1 + 3 * x2 + u1;
    y2l = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    if ( y1l > 0 ) then y1 = 1;
    else y1 = 0;
    if ( y1l > 0 ) then y2 = y2l;
    else y2 = 0;
    output;
  end;
run;

/*-- Type 2 Tobit --*/

```

```
proc qlim data=a2 method=qn;
  model y1 = x1 x2 / discrete;
  model y2 = x1 x2 / select(y1=1);
run;
```

Output 22.6.2 Type 2 Tobit

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables		2			
Endogenous Variable		y1 y2			
Number of Observations		500			
Log Likelihood		-476.12328			
Maximum Absolute Gradient		8.30075E-7			
Number of Iterations		17			
Optimization Method		Quasi-Newton			
AIC		968.24655			
Schwarz Criterion		1002			
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y2.Intercept	1	3.066992	0.106903	28.69	<.0001
y2.x1	1	4.004874	0.072043	55.59	<.0001
y2.x2	1	-2.079352	0.087544	-23.75	<.0001
_Sigma.y2	1	0.940559	0.039321	23.92	<.0001
y1.Intercept	1	1.017140	0.154975	6.56	<.0001
y1.x1	1	2.253080	0.256097	8.80	<.0001
y1.x2	1	3.305140	0.343695	9.62	<.0001
_Rho	1	0.292992	0.210073	1.39	0.1631

Type 3 Tobit

```
data a3;
  keep y1 y2 x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    y1l = 1 + 2 * x1 + 3 * x2 + u1;
    y2l = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    if ( y1l > 0 ) then y1 = y1l;
    else y1 = 0;
    if ( y1l > 0 ) then y2 = y2l;
    else y2 = 0;
    output;
  end;
run;
```

```

/*-- Type 3 Tobit --*/
proc qlim data=a3 method=qn;
    model y1 = x1 x2 / censored(lb=0);
    model y2 = x1 x2 / select(y1>0);
run;

```

Output 22.6.3 Type 3 Tobit

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables		2			
Endogenous Variable		y1 y2			
Number of Observations		500			
Log Likelihood		-838.94087			
Maximum Absolute Gradient		9.71691E-6			
Number of Iterations		16			
Optimization Method		Quasi-Newton			
AIC		1696			
Schwarz Criterion		1734			
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y2.Intercept	1	3.081206	0.080121	38.46	<.0001
y2.x1	1	3.998361	0.063734	62.73	<.0001
y2.x2	1	-2.088280	0.072876	-28.66	<.0001
_Sigma.y2	1	0.939799	0.039047	24.07	<.0001
y1.Intercept	1	0.981975	0.067351	14.58	<.0001
y1.x1	1	2.032675	0.059363	34.24	<.0001
y1.x2	1	2.976609	0.065584	45.39	<.0001
_Sigma.y1	1	0.969968	0.039795	24.37	<.0001
_Rho	1	0.226281	0.057672	3.92	<.0001

Type 4 Tobit

```

data a4;
    keep y1 y2 y3 x1 x2;
    do i = 1 to 500;
        x1 = rannor( 19283 );
        x2 = rannor( 19283 );
        u1 = rannor( 19283 );
        u2 = rannor( 19283 );
        u3 = rannor( 19283 );
        y1l = 1 + 2 * x1 + 3 * x2 + u1;
        y2l = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
        y3l = 0 - 1 * x1 + 1 * x2 + u1*.1 - u2*.5 + u3*.5;
        if ( y1l > 0 ) then y1 = y1l;
        else y1 = 0;
    end;

```

```

        if ( y11 > 0 ) then y2 = y21;
        else                y2 = 0;
        if ( y11 <= 0 ) then y3 = y31;
        else                y3 = 0;
        output;
    end;
run;

/*-- Type 4 Tobit --*/
proc qlim data=a4 method=qn;
    model y1 = x1 x2 / censored(lb=0);
    model y2 = x1 x2 / select(y1>0);
    model y3 = x1 x2 / select(y1<=0);
run;

```

Output 22.6.4 Type 4 Tobit

Binary Data					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables				3	
Endogenous Variable	y1 y2 y3				
Number of Observations				500	
Log Likelihood				-1128	
Maximum Absolute Gradient				0.0000161	
Number of Iterations				21	
Optimization Method				Quasi-Newton	
AIC				2285	
Schwarz Criterion				2344	
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y2.Intercept	1	2.894656	0.076079	38.05	<.0001
y2.x1	1	4.072704	0.062675	64.98	<.0001
y2.x2	1	-1.901163	0.076874	-24.73	<.0001
_Sigma.y2	1	0.981655	0.039564	24.81	<.0001
y3.Intercept	1	0.064594	0.179441	0.36	0.7189
y3.x1	1	-0.938384	0.096570	-9.72	<.0001
y3.x2	1	1.035798	0.123104	8.41	<.0001
_Sigma.y3	1	0.743124	0.038240	19.43	<.0001
y1.Intercept	1	0.987370	0.067861	14.55	<.0001
y1.x1	1	2.050408	0.060819	33.71	<.0001
y1.x2	1	2.982190	0.072552	41.10	<.0001
_Sigma.y1	1	1.032473	0.040971	25.20	<.0001
_Rho.y1.y2	1	0.291587	0.053436	5.46	<.0001
_Rho.y1.y3	1	-0.031665	0.260057	-0.12	0.9031

Type 5 Tobit

```

data a5;
  keep y1 y2 y3 x1 x2;
  do i = 1 to 500;
    x1 = rannor( 19283 );
    x2 = rannor( 19283 );
    u1 = rannor( 19283 );
    u2 = rannor( 19283 );
    u3 = rannor( 19283 );
    y1l = 1 + 2 * x1 + 3 * x2 + u1;
    y2l = 3 + 4 * x1 - 2 * x2 + u1*.2 + u2;
    y3l = 0 - 1 * x1 + 1 * x2 + u1*.1 - u2*.5 + u3*.5;
    if ( y1l > 0 ) then y1 = 1;
    else y1 = 0;
    if ( y1l > 0 ) then y2 = y2l;
    else y2 = 0;
    if ( y1l <= 0 ) then y3 = y3l;
    else y3 = 0;
    output;
  end;
run;

/*-- Type 5 Tobit --*/
proc qlim data=a5 method=qn;
  model y1 = x1 x2 / discrete;
  model y2 = x1 x2 / select(y1>0);
  model y3 = x1 x2 / select(y1<=0);
run;

```

Output 22.6.5 Type 5 Tobit

Binary Data			
The QLIM Procedure			
Model Fit Summary			
Number of Endogenous Variables			3
Endogenous Variable	y1	y2	y3
Number of Observations			500
Log Likelihood			-734.50612
Maximum Absolute Gradient			3.57134E-7
Number of Iterations			20
Optimization Method			Quasi-Newton
AIC			1495
Schwarz Criterion			1550

Output 22.6.5 *continued*

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
y2.Intercept	1	2.887523	0.095193	30.33	<.0001
y2.x1	1	4.078926	0.069623	58.59	<.0001
y2.x2	1	-1.898898	0.086578	-21.93	<.0001
_Sigma.y2	1	0.983059	0.039987	24.58	<.0001
y3.Intercept	1	0.071764	0.171522	0.42	0.6757
y3.x1	1	-0.935299	0.092843	-10.07	<.0001
y3.x2	1	1.039954	0.120697	8.62	<.0001
_Sigma.y3	1	0.743083	0.038225	19.44	<.0001
y1.Intercept	1	1.067578	0.142789	7.48	<.0001
y1.x1	1	2.068376	0.226020	9.15	<.0001
y1.x2	1	3.157385	0.314743	10.03	<.0001
_Rho.y1.y2	1	0.312369	0.177010	1.76	0.0776
_Rho.y1.y3	1	-0.018225	0.234886	-0.08	0.9382

Example 22.7: Stochastic Frontier Models

This example illustrates the estimation of stochastic frontier production and cost models.

First, a production function model is estimated. The data for this example were collected by Christensen Associates; they represent a sample of 125 observations on inputs and output for 10 airlines between 1970 and 1984. The explanatory variables (inputs) are fuel (LF), materials (LM), equipment (LE), labor (LL), and property (LP), and (LQ) is an index that represents passengers, charter, mail, and freight transported.

The following statements create the dataset:

```

title1 'Stochastic Frontier Production Model';
data airlines;
  input TS FIRM NI LQ LF LM LE LL LP;
datalines;
1 1 15 -0.0484 0.2473 0.2335 0.2294 0.2246 0.2124
1 1 15 -0.0133 0.2603 0.2492 0.241 0.2216 0.1069
2 1 15 0.088 0.2666 0.3273 0.3365 0.2039 0.0865

... more lines ...

```

The following statements estimate a stochastic frontier exponential production model that uses Christensen Associates data:

```

/*-- Stochastic Frontier Production Model --*/
proc qlim data=airlines;
  model LQ=LF LM LE LL LP;
  endogenous LQ ~ frontier (type=exponential production);
run;

```

Figure 22.7.1 shows the results from this production model.

Output 22.7.1 Stochastic Frontier Production Model

Stochastic Frontier Production Model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables					1
Endogenous Variable					LQ
Number of Observations					125
Log Likelihood					83.27815
Maximum Absolute Gradient					9.83602E-6
Number of Iterations					19
Optimization Method					Quasi-Newton
AIC					-150.55630
Schwarz Criterion					-127.92979
Sigma					0.12445
Lambda					0.55766
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-0.085048	0.024528	-3.47	0.0005
LF	1	-0.115802	0.124178	-0.93	0.3511
LM	1	0.756253	0.078755	9.60	<.0001
LE	1	0.424916	0.081893	5.19	<.0001
LL	1	-0.136421	0.089702	-1.52	0.1283
LP	1	0.098967	0.042776	2.31	0.0207
_Sigma_v	1	0.108688	0.010063	10.80	<.0001
_Sigma_u	1	0.060611	0.017603	3.44	0.0006

Similarly, the stochastic frontier production function can be estimated with (type=half) or (type=truncated) options that represent half-normal and truncated normal production models.

In the next step, stochastic frontier cost function is estimated. The data for the cost model are provided by Christensen and Greene (1976). The data describe costs and production inputs of 145 U.S. electricity producers in 1955. The model being estimated follows the nonhomogenous version of the Cobb-Douglas cost function:

$$\log\left(\frac{\text{Cost}}{\text{FPrice}}\right) = \beta_0 + \beta_1 \log\left(\frac{\text{KPrice}}{\text{FPrice}}\right) + \beta_2 \log\left(\frac{\text{LPrice}}{\text{FPrice}}\right) + \beta_3 \log(\text{Output}) + \beta_4 \frac{1}{2} \log(\text{Output})^2 + \epsilon$$

All dollar values are normalized by fuel price. The quadratic log of the output is added to capture nonlinearities due to scale effects in cost functions. New variables, log_C_PF, log_PK_PF, log_PL_PF, log_y, and log_y_sq, are created to reflect transformations. The following statements create the data set and transformed variables:

```
data electricity;
```



```

input Firm Year Cost Output LPrice LShare KPrice KShare FPrice FShare;
datalines;
1 1955 .0820 2.0 2.090 .3164 183.000 .4521 17.9000 .2315
2 1955 .6610 3.0 2.050 .2073 174.000 .6676 35.1000 .1251
3 1955 .9900 4.0 2.050 .2349 171.000 .5799 35.1000 .1852
4 1955 .3150 4.0 1.830 .1152 166.000 .7857 32.2000 .0990

... more lines ...

/* Data transformations */
data electricity;
set electricity;
label Firm="firm index"
      Year="1955 for all observations"
      Cost="Total cost"
      Output="Total output"
      LPrice="Wage rate"
      LShare="Cost share for labor"
      KPrice="Capital price index"
      KShare="Cost share for capital"
      FPrice="Fuel price"
      FShare="Cost share for fuel";
log_C_PF=log(Cost/FPrice);
log_PK_PF=log(KPrice/FPrice);
log_PL_PF=log(LPrice/FPrice);
log_y=log(Output);
log_y_sq=log_y**2/2;
run;

```

The following statements estimate a stochastic frontier exponential cost model that uses Christensen and Greene (1976) data:

```

/*-- Stochastic Frontier Cost Model --*/
proc qlim data=electricity;
model log_C_PF = log_PK_PF log_PL_PF log_y log_y_sq;
endogenous log_C_PF ~ frontier (type=exponential cost);
run;

```

Output 22.7.2 shows the results.

Output 22.7.2 Exponential Distribution

Stochastic Frontier Production Model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables				1	
Endogenous Variable				log_C_PF	
Number of Observations				159	
Log Likelihood				-23.30430	
Maximum Absolute Gradient				3.0458E-6	
Number of Iterations				21	
Optimization Method				Quasi-Newton	
AIC				60.60860	
Schwarz Criterion				82.09093	
Sigma				0.30750	
Lambda				1.71345	
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-4.983211	0.543328	-9.17	<.0001
log_PK_PF	1	0.090242	0.109202	0.83	0.4086
log_PL_PF	1	0.504299	0.118263	4.26	<.0001
log_y	1	0.427182	0.066680	6.41	<.0001
log_y_sq	1	0.066120	0.010079	6.56	<.0001
_Sigma_v	1	0.154998	0.020271	7.65	<.0001
_Sigma_u	1	0.265581	0.033614	7.90	<.0001

Similarly, the stochastic frontier cost model can be estimated with (type=half) or (type=truncated) options that represent half-normal and truncated normal errors.

The following statements illustrate the half-normal option:

```

/*-- Stochastic Frontier Cost Model --*/
proc qlim data=electricity;
  model log_C_PF = log_PK_PF log_PL_PF log_y log_y_sq;
  endogenous log_C_PF ~ frontier (type=half cost);
run;

```

Output 22.7.3 shows the result.

Output 22.7.3 Half-Normal Distribution

Stochastic Frontier Production Model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables				1	
Endogenous Variable				log_C_PF	
Number of Observations				159	
Log Likelihood				-34.95304	
Maximum Absolute Gradient				0.0001150	
Number of Iterations				22	
Optimization Method				Quasi-Newton	
AIC				83.90607	
Schwarz Criterion				105.38840	
Sigma				0.42761	
Lambda				1.80031	
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-4.434634	0.690197	-6.43	<.0001
log_PK_PF	1	0.069624	0.136250	0.51	0.6093
log_PL_PF	1	0.474578	0.146812	3.23	0.0012
log_y	1	0.256874	0.080777	3.18	0.0015
log_y_sq	1	0.088051	0.011817	7.45	<.0001
_Sigma_v	1	0.207637	0.039222	5.29	<.0001
_Sigma_u	1	0.373810	0.073605	5.08	<.0001

The following statements illustrate the truncated normal option:

```

/*-- Stochastic Frontier Cost Model --*/
proc qlim data=electricity;
  model log_C_PF = log_PK_PF log_PL_PF log_y log_y_sq;
  endogenous log_C_PF ~ frontier (type=truncated cost);
run;

```

Output 22.7.4 shows the results.

Output 22.7.4 Truncated Normal Distribution

Stochastic Frontier Production Model					
The QLIM Procedure					
Model Fit Summary					
Number of Endogenous Variables					1
Endogenous Variable				log_C_PF	
Number of Observations					159
Log Likelihood					-60.32110
Maximum Absolute Gradient					4225
Number of Iterations					4
Optimization Method				Quasi-Newton	
AIC					136.64220
Schwarz Criterion					161.19343
Sigma					0.37350
Lambda					0.70753
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-3.770440	0.839388	-4.49	<.0001
log_PK_PF	1	-0.045852	0.176682	-0.26	0.7952
log_PL_PF	1	0.602961	0.191454	3.15	0.0016
log_y	1	0.094966	0.071124	1.34	0.1818
log_y_sq	1	0.113010	0.012225	9.24	<.0001
_Sigma_v	1	0.304905	0.047868	6.37	<.0001
_Sigma_u	1	0.215728	0.068725	3.14	0.0017
_Mu	1	0.477097	0.116295	4.10	<.0001

If no (Production) or (Cost) option is specified, the stochastic frontier production model is estimated by default.

References

- Abramowitz, M. and Stegun, A. (1970), *Handbook of Mathematical Functions*, New York: Dover Press.
- Aigner, C., Lovell, C. A. K., Schmidt, P. (1977), "Formulation and Estimation of Stochastic Frontier Production Function Models," *Journal of Econometrics*, 6:1 (July), 21–37
- Aitchison, J. and Silvey, S. (1957), "The Generalization of Probit Analysis to the Case of Multiple Responses," *Biometrika*, 44, 131–140.
- Amemiya, T. (1978a), "The Estimation of a Simultaneous Equation Generalized Probit Model," *Econometrica*, 46, 1193–1205.

- Amemiya, T. (1978b), "On a Two-Step Estimate of a Multivariate Logit Model," *Journal of Econometrics*, 8, 13–21.
- Amemiya, T. (1981), "Qualitative Response Models: A Survey," *Journal of Economic Literature*, 19, 483–536.
- Amemiya, T. (1984), "Tobit Models: A Survey," *Journal of Econometrics*, 24, 3–61.
- Amemiya, T. (1985), *Advanced Econometrics*, Cambridge: Harvard University Press.
- Battese, G. E. and Coelli, T. J. (1988) "Prediction of Firm-Level Technical Efficiencies with a Generalized Frontier Production Function and Panel Data," *Journal of Econometrics*, 38, 387–99.
- Ben-Akiva, M. and Lerman, S. R. (1987), *Discrete Choice Analysis*, Cambridge: MIT Press.
- Bera, A. K., Jarque, C. M., and Lee, L.-F. (1984), "Testing the Normality Assumption in Limited Dependent Variable Models," *International Economic Review*, 25, 563–578.
- Bloom, D. E. and Killingsworth, M. R. (1985), "Correcting for Truncation Bias Caused by a Latent Truncation Variable," *Journal of Econometrics*, 27, 131–135.
- Box, G. E. P. and Cox, D. R. (1964), "An Analysis of Transformations," *Journal of the Royal Statistical Society, Series B.*, 26, 211–252.
- Cameron, A. C. and Trivedi, P. K. (1986), "Econometric Models Based on Count Data: Comparisons and Applications of Some Estimators," *Journal of Applied Econometrics*, 1, 29–53.
- Cameron, A. C. and Trivedi, P. K. (1998), *Regression Analysis of Count Data*, Cambridge: Cambridge University Press.
- Christensen, L. and W. Greene, 1976, "Economies of Scale in U.S. Electric Power Generation," *Journal of Political Economy*, 84, pp. 655–676.
- Coelli, T. J., Prasada Rao, D. S., Battese, G. E. (1998), *An Introduction to Efficiency and Productivity Analysis*, London: Kluwer Academic Publisher.
- Copley, P. A., Doucet, M. S., and Gaver, K. M. (1994), "A Simultaneous Equations Analysis of Quality Control Review Outcomes and Engagement Fees for Audits of Recipients of Federal Financial Assistance," *The Accounting Review*, 69, 244–256.
- Cox, D. R. (1970), *Analysis of Binary Data*, London: Methuen.
- Cox, D. R. (1972), "Regression Models and Life Tables," *Journal of the Royal Statistical Society, Series B*, 20, 187–220.
- Cox, D. R. (1975), "Partial Likelihood," *Biometrika*, 62, 269–276.
- Deis, D. R. and Hill, R. C. (1998), "An Application of the Bootstrap Method to the Simultaneous Equations Model of the Demand and Supply of Audit Services," *Contemporary Accounting Research*, 15, 83–99.
- Estrella, A. (1998), "A New Measure of Fit for Equations with Dichotomous Dependent Variables," *Journal of Business and Economic Statistics*, 16, 198–205.

- Gallant, A. R. (1987), *Nonlinear Statistical Models*, New York: Wiley.
- Genz, A. (1992), "Numerical Computation of Multivariate Normal Probabilities," *Journal of Computational and Graphical Statistics*, 1, 141–150.
- Godfrey, L. G. (1988), *Misspecification Tests in Econometrics*, Cambridge: Cambridge University Press.
- Gourieroux, C., Monfort, A., Renault, E., and Trognon, A. (1987), "Generalized Residuals," *Journal of Econometrics*, 34, 5–32.
- Greene, W. H. (1997), *Econometric Analysis*, Upper Saddle River, N.J.: Prentice Hall.
- Gregory, A. W. and Veall, M. R. (1985), "On Formulating Wald Tests for Nonlinear Restrictions," *Econometrica*, 53, 1465–1468.
- Hajivassiliou, V. A. (1993), "Simulation Estimation Methods for Limited Dependent Variable Models," in *Handbook of Statistics*, Vol. 11, ed. G. S. Maddala, C. R. Rao, and H. D. Vinod, New York: Elsevier Science Publishing.
- Hajivassiliou, V. A., and McFadden, D. (1998), "The Method of Simulated Scores for the Estimation of LDV Models," *Econometrica*, 66, 863–896.
- Heckman, J. J. (1978), "Dummy Endogenous Variables in a Simultaneous Equation System," *Econometrica*, 46, 931–959.
- Hinkley, D. V. (1975), "On Power Transformations to Symmetry," *Biometrika*, 62, 101–111.
- Jondrow, J., Lovell, C. A. K., Materov, I. S., and Schmidt, P. (1982) "On The Estimation of Technical Efficiency in the Stochastic Frontier Production Function Model," *Journal of Econometrics*, 19:2/3 (August), 233–38.
- Kim, M. and Hill, R. C. (1993), "The Box-Cox Transformation-of-Variables in Regression," *Empirical Economics*, 18, 307–319.
- King, G. (1989b), *Unifying Political Methodology: The Likelihood Theory and Statistical Inference*, Cambridge: Cambridge University Press.
- Kumbhakar, S. C. and Knox Lovell, C. A. (2000), *Stochastic Frontier Analysis*, New York: Cambridge University Press.
- Lee, L.-F. (1981), "Simultaneous Equations Models with Discrete and Censored Dependent Variables," in *Structural Analysis of Discrete Data with Econometric Applications*, ed. C. F. Manski and D. McFadden, Cambridge: MIT Press.
- Long, J. S. (1997), *Regression Models for Categorical and Limited Dependent Variables*, Thousand Oaks, CA: Sage Publications.
- McFadden, D. (1974), "Conditional Logit Analysis of Qualitative Choice Behavior," in *Frontiers in Econometrics*, ed. P. Zarembka, New York: Academic Press.
- McFadden, D. (1981), "Econometric Models of Probabilistic Choice," in *Structural Analysis of Discrete Data with Econometric Applications*, ed. C. F. Manski and D. McFadden, Cambridge: MIT Press.

- McKelvey, R. D. and Zavoina, W. (1975), "A Statistical Model for the Analysis of Ordinal Level Dependent Variables," *Journal of Mathematical Sociology*, 4, 103–120.
- Meeusen, W. and van Den Broeck, J. (1977), "Efficiency Estimation from Cobb-Douglas Production Functions with Composed Error," *International Economic Review*, 18:2(Jun), 435–444.
- Mroz, T. A. (1987), "The Sensitivity of an Empirical Model of Married Women's Hours of Work to Economic and Statistical Assumptions," *Econometrica*, 55, 765–799.
- Mroz, T. A. (1999), "Discrete Factor Approximations in Simultaneous Equation Models: Estimating the Impact of a Dummy Endogenous Variable on a Continuous Outcome," *Journal of Econometrics*, 92, 233–274.
- Nawata, K. (1994), "Estimation of Sample Selection Bias Models by the Maximum Likelihood Estimator and Heckman's Two-Step Estimator," *Economics Letters*, 45, 33–40.
- Parks, R. W. (1967), "Efficient Estimation of a System of Regression Equations When Disturbances Are Both Serially and Contemporaneously Correlated," *Journal of the American Statistical Association*, 62, 500–509.
- Phillips, C. B. and Park, J. Y. (1988), "On Formulating Wald Tests of Nonlinear Restrictions," *Econometrica*, 56, 1065–1083.
- Powers, D. A. and Xie, Y. (2000), *Statistical Methods for Categorical Data Analysis*, San Diego: Academic Press.
- Wooldridge, J. M. (2002), *Econometric Analysis of Cross Section of Panel Data*, Cambridge, MA: MIT Press.

Chapter 23

The SEVERITY Procedure

Contents

Overview: SEVERITY Procedure	1520
Getting Started: SEVERITY Procedure	1521
A Simple Example of Fitting Predefined Distributions	1521
An Example with Left-Truncation and Right-Censoring	1527
An Example of Modeling Regression Effects	1532
Syntax: SEVERITY Procedure	1537
Functional Summary	1537
PROC SEVERITY Statement	1539
BY Statement	1545
LOSS Statement	1546
WEIGHT Statement	1548
SCALEMODEL Statement	1548
DIST Statement	1549
NLOPTIONS Statement	1550
Programming Statements (Experimental)	1550
Details: SEVERITY Procedure	1551
Predefined Distributions	1551
Censoring and Truncation	1561
Parameter Estimation Method	1563
Parameter Initialization	1565
Estimating Regression Effects	1566
Empirical Distribution Function Estimation Methods	1569
Statistics of Fit	1575
Defining a Distribution Model with the FCMP Procedure	1579
Predefined Utility Functions	1591
Custom Objective Functions (Experimental)	1596
Input Data Sets	1599
Output Data Sets	1600
Displayed Output	1604
ODS Graphics	1606
Examples: SEVERITY Procedure	1609
Example 23.1: Defining a Model for Gaussian Distribution	1609
Example 23.2: Defining a Model for Gaussian Distribution with a Scale Parameter	1613
Example 23.3: Defining a Model for Mixed-Tail Distributions	1620

Example 23.4: Estimating Parameters Using Cramér-von Mises Estimator	1629
Example 23.5: Fitting a Scaled Tweedie Model with Regressors	1631
Example 23.6: Fitting Distributions to Interval-Censored Data	1635
References	1638

Overview: SEVERITY Procedure

The SEVERITY procedure estimates parameters of any arbitrary continuous probability distribution that is used to model the magnitude (severity) of a continuous-valued event of interest. Some examples of such events are loss amounts paid by an insurance company and demand of a product as depicted by its sales. PROC SEVERITY is especially useful when the severity of an event does not follow typical distributions, such as the normal distribution, that are often assumed by standard statistical methods.

PROC SEVERITY provides a default set of probability distribution models that includes the Burr, exponential, gamma, generalized Pareto, inverse Gaussian (Wald), lognormal, Pareto, Tweedie, and Weibull distributions. In the simplest form, you can estimate the parameters of any of these distributions by using a list of severity values that are recorded in a SAS data set. The values can optionally be grouped by a set of BY variables. PROC SEVERITY computes the estimates of the model parameters, their standard errors, and their covariance structure by using the maximum likelihood method for each of the BY groups.

PROC SEVERITY can fit multiple distributions at the same time and choose the best distribution according to a specified selection criterion. Seven different statistics of fit can be used as selection criteria. They are log likelihood, Akaike's information criterion (AIC), corrected Akaike's information criterion (AICC), Schwarz Bayesian information criterion (BIC), Kolmogorov-Smirnov statistic (KS), Anderson-Darling statistic (AD), and Cramér-von Mises statistic (CvM).

You can request the procedure to output the status of the estimation process, the parameter estimates and their standard errors, the estimated covariance structure of the parameters, the statistics of fit, estimated cumulative distribution function (CDF) for each of the specified distributions, and the empirical distribution function (EDF) estimate (which is used to compute the KS, AD, and CvM statistics of fit).

The following key features of PROC SEVERITY make it unique among SAS procedures that can estimate continuous probability distributions:

- PROC SEVERITY enables you to fit a distribution model when the severity values are truncated or censored or both. You can specify any combination of the following types of censoring and truncation effects: left-censoring, right-censoring, left-truncation, or right-truncation. This is especially useful in applications with an insurance-type model where a severity (loss) is reported and recorded only if it is greater than the deductible amount (left-truncation) and where a severity value greater than or equal to the policy limit is recorded at the limit (right-censoring). Another useful application is that of interval-censored data, where you know both the lower limit (right-censoring) and upper limit (left-censoring) on the severity, but you do not know the exact value. The procedure also enables you to specify a *probability of observability* for the left-truncated data, which is a probability of observing values greater than the left-truncation threshold. This additional information can be useful in certain applications to more correctly model the distribution of the severity of events.

When truncation or censoring is specified, PROC SEVERITY can compute the empirical distribution function (EDF) estimate by using either Kaplan-Meier's product-limit estimator or Turnbull's estimator. The former is used by default when only one form of censoring effect (right-censoring or left-censoring) is specified, whereas the latter is used by default when both left-censoring and right-censoring effects are specified.

- PROC SEVERITY enables you to define any arbitrary continuous parametric distribution model and to estimate its parameters. You just need to define the key components of the distribution, such as its probability density function (PDF) and cumulative distribution function (CDF), as a set of functions and subroutines written with the FCMP procedure, which is part of Base SAS software. As long as the functions and subroutines follow certain rules, PROC SEVERITY can fit the distribution model defined by them.
- PROC SEVERITY can model the effect of exogenous or regressor variables on a probability distribution, as long as the distribution has a scale parameter. A linear combination of the regressor variables is assumed to affect the scale parameter via an exponential link function.

If a distribution does not have a scale parameter, then either it needs to have another parameter that can be derived from a scale parameter by using a supported transformation or it needs to be reparameterized to have a scale parameter. If neither of these is possible, then regression effects cannot be modeled.

- PROC SEVERITY enables you to specify your own objective function to be optimized for estimating the parameters of a model. You can write SAS programming statements to specify the contribution of each observation to the objective function. You can use keyword functions such as `_PDF_` and `_CDF_` in order to generalize the objective function to any distribution. If you do not specify your own objective function, then PROC SEVERITY estimates the parameters of a model by maximizing the likelihood function of the data.

These features and the core functionality are described in detail in the following sections.

Getting Started: SEVERITY Procedure

This section outlines the use of the SEVERITY procedure to fit continuous probability distribution models. It illustrates three different examples of different features of the procedure.

A Simple Example of Fitting Predefined Distributions

The simplest way to use PROC SEVERITY is to fit all the predefined distributions to a set of values and let the procedure identify the best fitting distribution.

Consider a lognormal distribution, whose probability density function (PDF) f and cumulative distribution function (CDF) F are as follows, respectively, where Φ denotes the CDF of the standard normal distribution:

$$f(x; \mu, \sigma) = \frac{1}{x\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{\log(x)-\mu}{\sigma}\right)^2} \quad \text{and} \quad F(x; \mu, \sigma) = \Phi\left(\frac{\log(x)-\mu}{\sigma}\right)$$

The following DATA step statements simulate a sample from a lognormal distribution with population parameters $\mu = 1.5$ and $\sigma = 0.25$, and store the sample in the variable Y of a data set Work.Test_sev1:

```
/*----- Simple Lognormal Example -----*/
data test_sev1(keep=y label='Simple Lognormal Sample');
  call streaminit(45678);
  label y='Response Variable';
  Mu = 1.5;
  Sigma = 0.25;
  do n = 1 to 100;
    y = exp(Mu) * rand('LOGNORMAL')**Sigma;
    output;
  end;
run;
```

The following statements fit all the predefined distribution models to the values of Y and identify the best distribution according to the corrected Akaike's information criterion (AICC):

```
proc severity data=test_sev1 crit=aicc;
  loss y;
  dist _predefined_;
run;
```

The PROC SEVERITY statement specifies the input data set along with the model selection criterion, the LOSS statement specifies the variable to be modeled, and the DIST statement with the _PREDEFINED_ keyword specifies that all the predefined distribution models be fitted.

Some of the default output displayed by this step is shown in Figure 23.1 through Figure 23.5. First, information about the input data set is displayed followed by the “Model Selection Table”, as shown in Figure 23.1. The model selection table displays the convergence status, the value of the selection criterion, and the selection status for each of the candidate models. The Converged column indicates whether the estimation process for a given distribution model has converged, might have converged, or failed. The Selected column indicates whether a given distribution has the best fit for the data according to the selection criterion. For this example, the lognormal distribution model is selected, because it has the lowest value for the selection criterion.

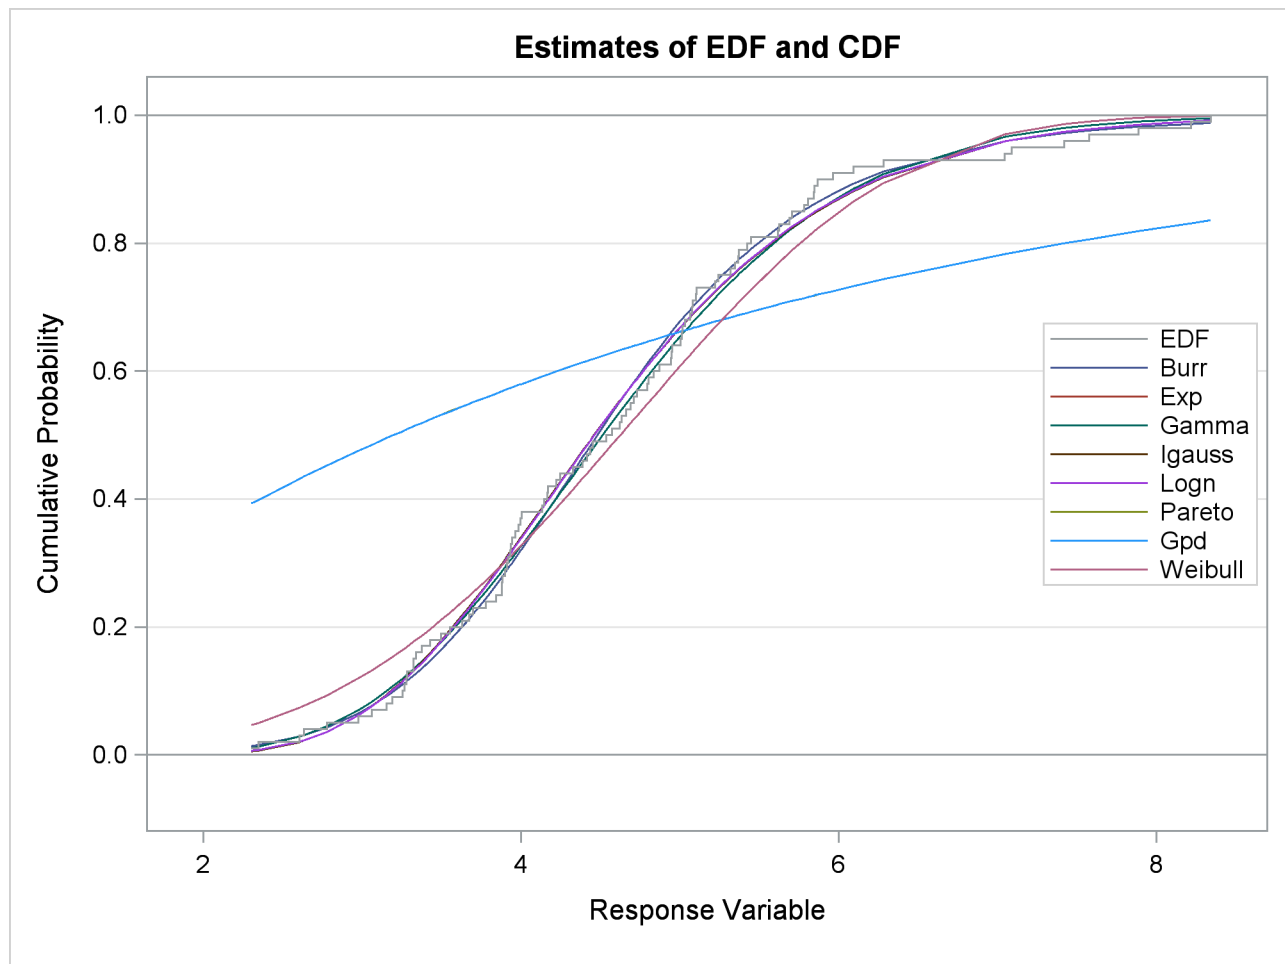
Figure 23.1 Data Set Information and Model Selection Table

The SEVERITY Procedure	
Input Data Set	
Name	WORK.TEST_SEV1
Label	Simple Lognormal Sample

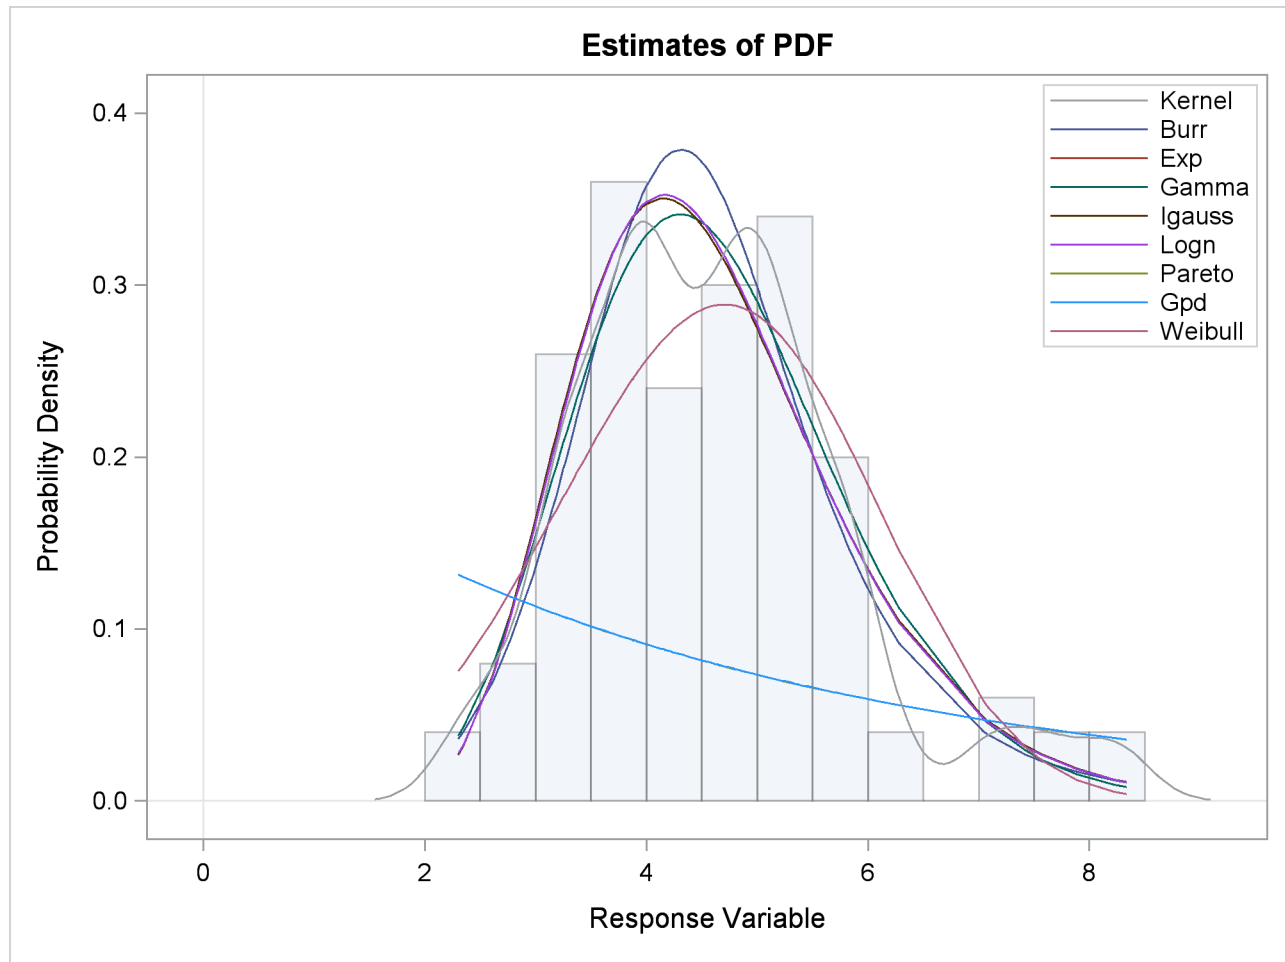
Figure 23.1 *continued*

Model Selection Table			
Distribution	Converged	Corrected Akaike's Information Criterion	Selected
Burr	Yes	322.50845	No
Exp	Yes	508.12287	No
Gamma	Yes	320.50264	No
Igauss	Yes	319.61652	No
Logn	Yes	319.56579	Yes
Pareto	Yes	510.28172	No
Gpd	Yes	510.20576	No
Weibull	Yes	334.82373	No

Next, two comparative plots are prepared. These plots enable you to visually verify how the models differ from each other and from the nonparametric estimates. The plot in [Figure 23.2](#) displays the cumulative distribution function (CDF) estimates of all the models and the estimates of the empirical distribution function (EDF). The CDF plot indicates that the Exp (exponential), Pareto, and Gpd (generalized Pareto) distributions are a poor fit as compared to the EDF estimate. The Weibull distribution is also a poor fit, although not as poor as exponential, Pareto, and Gpd. The other four distributions seem to be quite close to each other and to the EDF estimate.

Figure 23.2 Comparison of EDF and CDF Estimates of the Fitted Models

The plot in [Figure 23.3](#) displays the probability density function (PDF) estimates of all the models and the nonparametric kernel and histogram estimates. The PDF plot enables better visual comparison between the Burr, Gamma, Igauss (inverse Gaussian), and Logn (lognormal) models. The Burr and Gamma differ significantly from the Igauss and Logn distributions in the central portion of the range of Y values, while the latter two fit the data almost identically. This provides a visual confirmation of the information in the “Model Selection Table” of [Figure 23.1](#), which indicates that the AICC values of Igauss and Logn distributions are very close.

Figure 23.3 Comparison of PDF Estimates of the Fitted Models

The comparative plots are followed by the estimation information for each of the candidate models. The information for the lognormal model, which is the best fitting model, is shown in Figure 23.4. The first table displays a summary of the distribution. The second table displays the convergence status. This is followed by a summary of the optimization process which indicates the technique used, the number of iterations, the number of times the objective function was evaluated, and the log likelihood attained at the end of the optimization. Since the model with lognormal distribution has converged, PROC SEVERITY displays its statistics of fit and parameter estimates. The estimates of $\mu=1.49605$ and $\sigma=0.26243$ are quite close to the population parameters of $\mu=1.5$ and $\sigma=0.25$ from which the sample was generated. The p -value for each estimate indicates the rejection of the null hypothesis that the estimate is 0, implying that both the estimates are significantly different from 0.

Figure 23.4 Estimation Details for the Lognormal Model

The SEVERITY Procedure				
Distribution Information				
Name				Logn
Description	Lognormal Distribution			
Number of Distribution Parameters				2
Convergence Status for Logn Distribution				
Convergence criterion (GCONV=1E-8) satisfied.				
Optimization Summary for Logn Distribution				
Optimization Technique	Trust Region			
Number of Iterations				2
Number of Function Evaluations				8
Log Likelihood				-157.72104
Fit Statistics for Logn Distribution				
-2 Log Likelihood				315.44208
Akaike's Information Criterion				319.44208
Corrected Akaike's Information Criterion				319.56579
Schwarz's Bayesian Information Criterion				324.65242
Kolmogorov-Smirnov Statistic				0.50641
Anderson-Darling Statistic				0.31240
Cramer-von Mises Statistic				0.04353
Parameter Estimates for Logn Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Mu	1.49605	0.02651	56.43	<.0001
Sigma	0.26243	0.01874	14.00	<.0001

The parameter estimates of the Burr distribution are shown in [Figure 23.5](#). These estimates are used in the next example.

Figure 23.5 Parameter Estimates for the Burr Model

Parameter Estimates for Burr Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Theta	4.62348	0.46181	10.01	<.0001
Alpha	1.15706	0.47493	2.44	0.0167
Gamma	6.41227	0.99039	6.47	<.0001

An Example with Left-Truncation and Right-Censoring

PROC SEVERITY enables you to specify that the response variable values are left-truncated or right-censored. The following DATA step expands the data set of the previous example to simulate a scenario that is typically encountered by an automobile insurance company. The values of the variable Y represent the loss values on claims that are reported to an auto insurance company. The variable THRESHOLD records the deductible on the insurance policy. If the actual value of Y is less than or equal to the deductible, then it is unobservable and does not get recorded. In other words, THRESHOLD specifies the left-truncation of Y. LIMIT records the policy limit. If the value of Y is equal to or greater than the recorded value, then the observation is right-censored.

```
/*----- Lognormal Model with left-truncation and censoring -----*/
data test_sev2(keep=y threshold limit
    label='A Lognormal Sample With Censoring and Truncation');
    set test_sev1;
    label y='Censored & Truncated Response';
    if _n_ = 1 then call streaminit(45679);

    /* make about 20% of the observations left-truncated */
    if (rand('UNIFORM') < 0.2) then
        threshold = y * (1 - rand('UNIFORM'));
    else
        threshold = .;
    /* make about 15% of the observations right-censored */
    iscens = (rand('UNIFORM') < 0.15);
    if (iscens) then
        limit = y;
    else
        limit = .;
run;
```

The following statements use the AICC criterion to analyze which of the four predefined distributions (log-normal, Burr, gamma, and Weibull) has the best fit for the data:

```
proc severity data=test_sev2 crit=aicc
    print=all plots(markcensored marktruncated)=pp;
    loss y / lt=threshold rc=limit;

    dist logn burr gamma weibull;
run;
```

The LOSS statement specifies the left-truncation and right-censoring variables. Each candidate distribution needs to be specified by using a separate DIST statement. The PRINT= option in the PROC SEVERITY statement requests that all the displayed output be prepared. The PLOTS= option in the PROC SEVERITY statement requests that the P-P plots for each candidate distribution be prepared in addition to the default plots. It also instructs the procedure to mark the left-truncated and right-censored observations in the CDF plot.

Some of the key results prepared by PROC SEVERITY are shown in Figure 23.6 through Figure 23.11. The descriptive statistics of Y are shown in the second table of Figure 23.6. In addition to the estimates of the range, mean, and standard deviation of Y, the table also indicates the number of observations that are right-censored, left-truncated, and both right-censored and left-truncated. The “Model Selection Table” in Figure 23.6 shows that models with all the candidate distributions have converged and that the Logn (lognormal) model has the best fit for the data according to the AICC criterion.

Figure 23.6 Summary Results for the Truncated and Censored Data

The SEVERITY Procedure			
Input Data Set			
Name	WORK.TEST_SEV2		
Label	A Lognormal Sample With Censoring and Truncation		
Descriptive Statistics for Variable y			
Number of Observations			100
Number of Observations Used for Estimation			100
Minimum			2.30264
Maximum			8.34116
Mean			4.62007
Standard Deviation			1.23627
Number of Left Truncated Observations			23
Number of Right Censored Observations			14
Model Selection Table			
Distribution	Converged	Corrected Akaike's Information Criterion	Selected
Logn	Yes	298.92672	Yes
Burr	Yes	302.66229	No
Gamma	Yes	299.45293	No
Weibull	Yes	309.26779	No

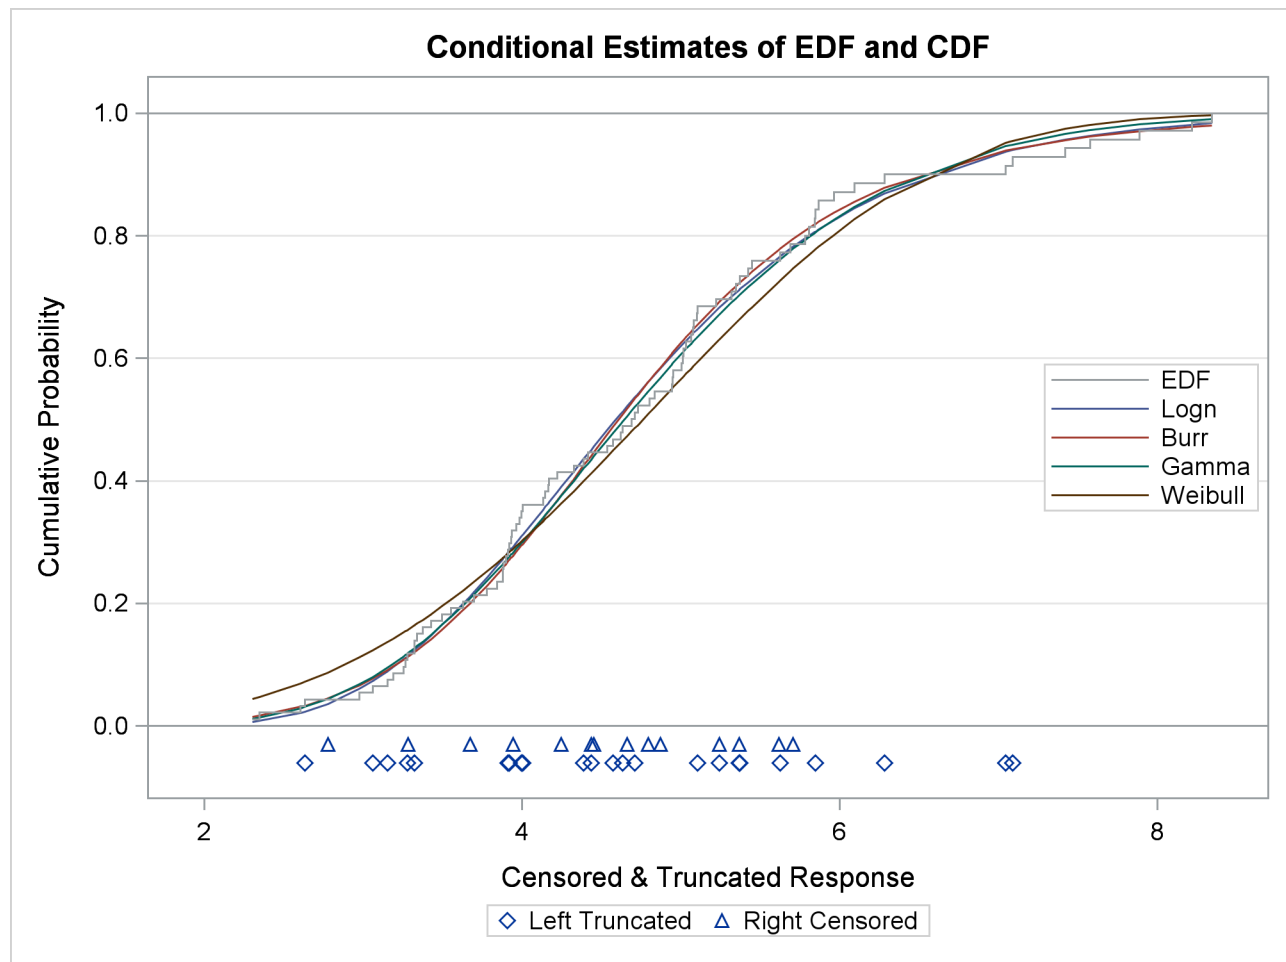
PROC SEVERITY also prepares a table that shows all the fit statistics for all the candidate models. It is useful to see which model would be the best fit according to each of the criteria. The table prepared for this example is shown in Figure 23.7. It indicates that the lognormal model is chosen by all the criteria.

Figure 23.7 Comparing All Statistics of Fit for the Truncated and Censored Data

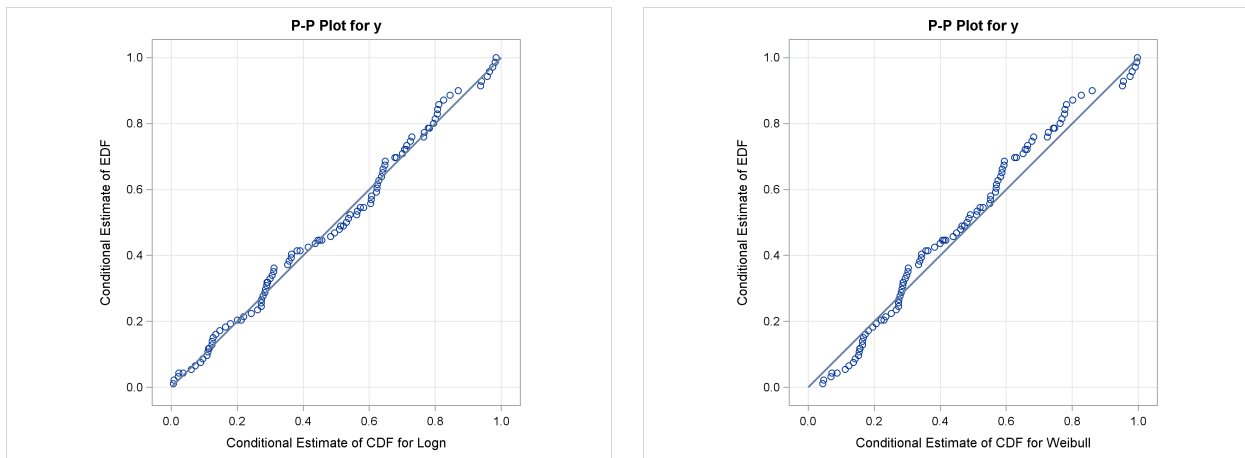
All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
Logn	294.80301*	298.80301*	298.92672*	304.01335*	0.51824*
Burr	296.41229	302.41229	302.66229	310.22780	0.66984
Gamma	295.32921	299.32921	299.45293	304.53955	0.62511
Weibull	305.14408	309.14408	309.26779	314.35442	0.93307

All Fit Statistics Table		
Distribution	AD	CvM
Logn	0.34736*	0.05159*
Burr	0.36712	0.05726
Gamma	0.42921	0.05526
Weibull	1.40699	0.17465

The plot that compares EDF and CDF estimates is shown in [Figure 23.8](#). When left-truncation is specified, both the EDF and CDF estimates are conditional on the response variable being greater than the smallest left-truncation threshold in the sample. Notice the markers close to the X-axis of the plot. These indicate the values of Y that are left-truncated or right-censored.

Figure 23.8 EDF and CDF Estimates for the Truncated and Censored Data

In addition to the comparative plot, PROC SEVERITY produces a P-P plot for each of the models that has not failed to converge. It is a scatter plot of the EDF and the CDF estimates. The model for which the points are scattered closer to the unit-slope reference line is a better fit. The P-P plot for the lognormal distribution is shown in Figure 23.9. It indicates that the EDF and the CDF match very closely. In contrast, the P-P plot for the Weibull distribution, also shown in Figure 23.9, indicates a poor fit.

Figure 23.9 P-P Plots for Lognormal and Weibull Models Fitted to Truncated and Censored Data

Specifying Initial Values for Parameters

All the predefined distributions have parameter initialization functions built into them. For the current example, [Figure 23.10](#) shows the initial values that are obtained by the predefined method for the Burr distribution. It also shows the summary of the optimization process and the final parameter estimates.

Figure 23.10 Burr Model Summary for the Truncated and Censored Data

Initial Parameter Values and Bounds for Burr Distribution			
Parameter	Initial Value	Lower Bound	Upper Bound
Theta	4.78102	1.05367E-8	Infty
Alpha	2.00000	1.05367E-8	Infty
Gamma	2.00000	1.05367E-8	Infty

Optimization Summary for Burr Distribution	
Optimization Technique	Trust Region
Number of Iterations	8
Number of Function Evaluations	21
Log Likelihood	-148.20614

Parameter Estimates for Burr Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Theta	4.76980	0.62492	7.63	<.0001
Alpha	1.16363	0.58859	1.98	0.0509
Gamma	5.94081	1.05004	5.66	<.0001

You can specify a different set of initial values if estimates are available from fitting the distribution to similar data. For this example, the parameters of the Burr distribution can be initialized with the final parameter estimates of the Burr distribution that were obtained in the first example (shown in Figure 23.5). One of the ways in which you can specify the initial values is as follows:

```
/*----- Specifying initial values using INIT= option -----*/
proc severity data=test_sev2 crit=aicc print=all plots=none;
    loss y / lt=threshold rc=limit;

    dist burr(init=(theta=4.62348 alpha=1.15706 gamma=6.41227));
run;
```

The names of the parameters specified in the INIT option must match the names used in the definition of the distribution. The results obtained with these initial values are shown in Figure 23.11. These indicate that new set of initial values causes the optimizer to reach the same solution with fewer iterations and function evaluations as compared to the default initialization.

Figure 23.11 Burr Model Optimization Summary for the Truncated and Censored Data

The SEVERITY Procedure				
Optimization Summary for Burr Distribution				
Optimization Technique		Trust Region		
Number of Iterations		5		
Number of Function Evaluations		14		
Log Likelihood		-148.20614		
Parameter Estimates for Burr Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Theta	4.76980	0.62492	7.63	<.0001
Alpha	1.16363	0.58859	1.98	0.0509
Gamma	5.94081	1.05004	5.66	<.0001

An Example of Modeling Regression Effects

Consider a scenario in which the magnitude of the response variable might be affected by some regressor (exogenous or independent) variables. The SEVERITY procedure enables you to model the effect of such variables on the distribution of the response variable via an exponential link function. In particular, if you have k random regressor variables denoted by x_j ($j = 1, \dots, k$), then the distribution of the response variable Y is assumed to have the form

$$Y \sim \exp\left(\sum_{j=1}^k \beta_j x_j\right) \cdot \mathcal{F}(\Theta)$$

where \mathcal{F} denotes the distribution of Y with parameters Θ and β_j ($j = 1, \dots, k$) denote the regression parameters (coefficients). For the effective distribution of Y to be a valid distribution from the same parametric

family as \mathcal{F} , it is necessary for \mathcal{F} to have a scale parameter. The effective distribution of Y can be written as

$$Y \sim \mathcal{F}(\theta, \Omega)$$

where θ denotes the scale parameter and Ω denotes the set of nonscale parameters. The scale θ is affected by the regressors as

$$\theta = \theta_0 \cdot \exp\left(\sum_{j=1}^k \beta_j x_j\right)$$

where θ_0 denotes a *base* value of the scale parameter.

Given this form of the model, PROC SEVERITY allows a distribution to be a candidate for modeling regression effects only if it has an untransformed or a log-transformed scale parameter.

All the predefined distributions, except the lognormal distribution, have a direct scale parameter (that is, a parameter that is a scale parameter without any transformation). For the lognormal distribution, the parameter μ is a log-transformed scale parameter. This can be verified by replacing μ with a parameter $\theta = e^\mu$, which results in the following expressions for the PDF f and the CDF F in terms of θ and σ , respectively, where Φ denotes the CDF of the standard normal distribution:

$$f(x; \theta, \sigma) = \frac{1}{x\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{\log(x) - \log(\theta)}{\sigma}\right)^2} \quad \text{and} \quad F(x; \theta, \sigma) = \Phi\left(\frac{\log(x) - \log(\theta)}{\sigma}\right)$$

With this parameterization, the PDF satisfies the $f(x; \theta, \sigma) = \frac{1}{\theta} f(\frac{x}{\theta}; 1, \sigma)$ condition and the CDF satisfies the $F(x; \theta, \sigma) = F(\frac{x}{\theta}; 1, \sigma)$ condition. This makes θ a scale parameter. Hence, $\mu = \log(\theta)$ is a log-transformed scale parameter and the lognormal distribution is eligible for modeling regression effects.

The following DATA step simulates a lognormal sample whose scale is decided by the values of the three regressors X1, X2, and X3 as follows:

$$\mu = \log(\theta) = 1 + 0.75 X1 - X2 + 0.25 X3$$

```
/*----- Lognormal Model with Regressors -----*/
data test_sev3(keep=y x1-x3
    label='A Lognormal Sample Affected by Regressors');
    array x{*} x1-x3;
    array b{4} _TEMPORARY_ (1 0.75 -1 0.25);
    call streaminit(45678);
    label y='Response Influenced by Regressors';
    Sigma = 0.25;
    do n = 1 to 100;
        Mu = b(1); /* log of base value of scale */
        do i = 1 to dim(x);
            x(i) = rand('UNIFORM');
            Mu = Mu + b(i+1) * x(i);
        end;
        y = exp(Mu) * rand('LOGNORMAL')**Sigma;
        output;
    end;
run;
```

The following PROC SEVERITY step fits the lognormal, Burr, and gamma distribution models to this data. The regressors are specified in the SCALEMODEL statement.

```
proc severity data=test_sev3 crit=aicc print=all;
  loss y;
  scalemodel x1-x3;

  dist logn burr gamma;
run;
```

Some of the key results prepared by PROC SEVERITY are shown in Figure 23.12 through Figure 23.16. The descriptive statistics of all the variables are shown in Figure 23.12.

Figure 23.12 Summary Results for the Regression Example

The SEVERITY Procedure					
Input Data Set					
Name	WORK.TEST_SEV3				
Label	A Lognormal Sample Affected by Regressors				
Descriptive Statistics for Variable y					
Number of Observations	100				
Number of Observations Used for Estimation	100				
Minimum	1.17863				
Maximum	6.65269				
Mean	2.99859				
Standard Deviation	1.12845				
Descriptive Statistics for the Regressor Variables					
Variable	N	Minimum	Maximum	Mean	Standard Deviation
x1	100	0.0005115	0.97971	0.51689	0.28206
x2	100	0.01883	0.99937	0.47345	0.28885
x3	100	0.00255	0.97558	0.48301	0.29709

The comparison of the fit statistics of all the models is shown in Figure 23.13. It indicates that the lognormal model is the best model according to each of the likelihood-based statistics, whereas the gamma model is the best model according to two of the three EDF-based statistics.

Figure 23.13 Comparison of Statistics of Fit for the Regression Example

All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
Logn	187.49609*	197.49609*	198.13439*	210.52194*	0.68991*
Burr	190.69154	202.69154	203.59476	218.32256	0.72348
Gamma	188.91483	198.91483	199.55313	211.94069	0.69101

All Fit Statistics Table		
Distribution	AD	CvM
Logn	0.74299	0.11044
Burr	0.73064	0.11332
Gamma	0.72219*	0.10546*

The distribution information and the convergence results of the lognormal model are shown in [Figure 23.14](#). The iteration history gives you a summary of how the optimizer is traversing the surface of the log-likelihood function in its attempt to reach the optimum. Both the change in the log likelihood and the maximum gradient of the objective function with respect to any of the parameters typically approach 0 if the optimizer converges.

Figure 23.14 Convergence Results for the Lognormal Model with Regressors

The SEVERITY Procedure				
Distribution Information				
Name				Logn
Description				Lognormal Distribution
Number of Distribution Parameters				2
Number of Regression Parameters				3
Convergence Status for Logn Distribution				
Convergence criterion (GCONV=1E-8) satisfied.				
Optimization Iteration History for Logn Distribution				
Iter	Number of Function Evaluations	Log Likelihood	Change in Log Likelihood	Maximum Gradient
0	2	-93.75285	.	6.16002
1	4	-93.74805	0.0048055	0.11031
2	6	-93.74805	1.50188E-6	0.00003376
3	8	-93.74805	2.1316E-13	3.1388E-12

Figure 23.14 *continued*

Optimization Summary for Logn Distribution	
Optimization Technique	Trust Region
Number of Iterations	3
Number of Function Evaluations	8
Log Likelihood	-93.74805

The final parameter estimates of the lognormal model are shown in [Figure 23.15](#). All the estimates are significantly different from zero. The estimate that is reported for the parameter *Mu* is the base value for the log-transformed scale parameter μ . Let x_i ($1 \leq i \leq 3$) denote the observed value for regressor X_i . If the lognormal distribution is chosen to model Y , then the effective value of the parameter μ varies with the observed values of regressors as

$$\mu = 1.04047 + 0.65221 x_1 - 0.91116 x_2 + 0.16243 x_3$$

These estimated coefficients are reasonably close to the population parameters (that is, within one or two standard errors).

Figure 23.15 Parameter Estimates for the Lognormal Model with Regressors

Parameter Estimates for Logn Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Mu	1.04047	0.07614	13.66	<.0001
Sigma	0.22177	0.01609	13.78	<.0001
x1	0.65221	0.08167	7.99	<.0001
x2	-0.91116	0.07946	-11.47	<.0001
x3	0.16243	0.07782	2.09	0.0395

The estimates of the gamma distribution model, which is the best model according to a majority of the EDF-based statistics, are shown in [Figure 23.16](#). The estimate that is reported for the parameter *Theta* is the base value for the scale parameter θ . If the gamma distribution is chosen to model Y , then the effective value of the scale parameter is $\theta = 0.14293 \exp(0.64562 x_1 - 0.89831 x_2 + 0.14901 x_3)$.

Figure 23.16 Parameter Estimates for the Gamma Model with Regressors

Parameter Estimates for Gamma Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Theta	0.14293	0.02329	6.14	<.0001
Alpha	20.37726	2.93277	6.95	<.0001
x1	0.64562	0.08224	7.85	<.0001
x2	-0.89831	0.07962	-11.28	<.0001
x3	0.14901	0.07870	1.89	0.0613

Syntax: SEVERITY Procedure

The following statements are used with the SEVERITY procedure.

```

PROC SEVERITY options ;
  BY variable-list ;
  LOSS < response-variable > < / censoring-truncation-options > ;
  WEIGHT weight-variable ;
  SCALEMODEL regressor-variable-list ;
  DIST distribution-name-or-keyword < (distribution-option) < distribution-name-or-keyword
    < (distribution-option) > > ... > ;
  NLOPTIONS options ;
  Programming statements ;

```

Functional Summary

Table 23.1 summarizes the statements and options that control the SEVERITY procedure.

Table 23.1 SEVERITY Functional Summary

Description	Statement	Option
Statements		
Specifies BY-group processing	BY	
Specifies the response variable to model along with censoring and truncation effects	LOSS	
Specifies the weight variable	WEIGHT	
Specifies the regression variables to model	SCALEMODEL	
Specifies distributions to fit	DIST	
Specifies optimization options	NLOPTIONS	
Specifies programming statements that define an objective function	Programming statements	
Data Set Options		
Specifies that the OUTEST= data set contain covariance estimates	PROC SEVERITY	COVOUT
Specifies the input data set	PROC SEVERITY	DATA=
Specifies the input data set for parameter estimates	PROC SEVERITY	INEST=
Specifies the output data set for CDF estimates	PROC SEVERITY	OUTCDF=
Specifies the output data set for parameter estimates	PROC SEVERITY	OUTEST=
Specifies the output data set for model information	PROC SEVERITY	OUTMODELINFO=

Table 23.1 *continued*

Description	Statement	Option
Specifies the output data set for statistics of fit	PROC SEVERITY	OUTSTAT=
Data Interpretation Options		
Specifies left-censoring	LOSS	LEFTCENSORED=
Specifies left-truncation	LOSS	LEFTTRUNCATED=
Specifies the probability of observability	LOSS	PROBOBSERVED=
Specifies right-censoring	LOSS	RIGHTCENSORED=
Specifies right-truncation	LOSS	RIGHTTRUNCATED=
Model Estimation Options		
Specifies the model selection criterion	PROC SEVERITY	CRITERION=
Specifies initial values for model parameters	DIST	INIT=
Specifies the objective function symbol	PROC SEVERITY	OBJECTIVE=
Specifies the denominator for computing covariance estimates	PROC SEVERITY	VARDEF=
Empirical CDF (EDF) Estimation Options		
Specifies the nonparametric method of CDF estimation	PROC SEVERITY	EMPIRICALCDF=
Specifies the α value for the lower bound on risk set size when the MODIFIEDKM method is specified in the EMPIRICALCDF= option	PROC SEVERITY	ALPHA=
Specifies the c value for the lower bound on risk set size when the MODIFIEDKM method is specified in the EMPIRICALCDF= option	PROC SEVERITY	C=
Specifies the absolute lower bound on risk set size when the MODIFIEDKM method is specified in the EMPIRICALCDF= option	PROC SEVERITY	RSLB=
Specifies that the final EDF estimates be maximum likelihood estimates when the TURNBULL method is specified in the EMPIRICALCDF= option	PROC SEVERITY	ENSUREMLE
Specifies the relative convergence criterion when the TURNBULL method is specified in the EMPIRICALCDF= option	PROC SEVERITY	EPS=
Specifies the maximum number of iterations when the TURNBULL method is specified in the EMPIRICALCDF= option	PROC SEVERITY	MAXITER=
Specifies the threshold below which an EDF estimate is deemed zero when the TURNBULL method is specified in the EMPIRICALCDF= option	PROC SEVERITY	ZEROPROB=

Table 23.1 *continued*

Description	Statement	Option
Displayed Output and Plotting Options		
Specifies that all displayed and graphical output be turned off	PROC SEVERITY	NOPRINT
Specifies the graphical output to be displayed	PROC SEVERITY	PLOTS=
Specifies the output to be displayed	PROC SEVERITY	PRINT=
Specifies the verbosity of messages printed to the log	PROC SEVERITY	VERBOSE=

PROC SEVERITY Statement

PROC SEVERITY *options* ;

You can specify two types of *options* in the PROC SEVERITY statement. One set of *options* controls input and output. The other set of *options* controls the model estimation and selection process.

The following *options* control the input data sets used by PROC SEVERITY and various forms of output generated by PROC SEVERITY. The *options* are listed in alphabetical order:

COVOUT

specifies that the OUTEST= data set contain the estimate of the covariance structure of the parameters. This option has no effect if the OUTEST= option is not specified. Details of how the covariance is reported in OUTEST= data set are provided in the section “[OUTEST= Data Set](#)” on page 1601.

DATA=SAS-data-set

names the input data set. If the DATA= option is not specified, then the most recently created SAS data set is used.

INEST=SAS-data-set

names the input data set that contains the initial values of the parameter estimates to start the optimization process. The initial values specified in the INIT= option in the DIST statement take precedence over any initial values specified in this data set. Details of the variables in this data set are provided in the section “[INEST= Data Set](#)” on page 1599.

NOPRINT

turns off all displayed and graphical output. If specified, any value specified for the PRINT= and PLOTS= options is ignored.

OUTCDF=SAS-data-set

names the output data set to contain estimates of the cumulative distribution function (CDF) value at each of the observations. The information is output for each specified model whose parameter estimation process converges. The data set also contains the estimates of the empirical distribution function (EDF). Details of the variables in this data set are provided in the section “[OUTCDF= Data Set](#)” on page 1600.

OUTEST=SAS-data-set

names the output data set to contain estimates of the parameter values and their standard errors for each model whose parameter estimation process converges. Details of the variables in this data set are provided in the section “[OUTEST= Data Set](#)” on page 1601.

OUTMODELINFO=SAS-data-set

names the output data set to contain the status of each fitted model. The status information includes the convergence status of the optimization process that is used to estimate the parameters, the status of estimating the covariance matrix, and whether a model is the best according to the specified selection criterion. Details of the variables in this data set are provided in the section “[OUTMODELINFO= Data Set](#)” on page 1602.

OUTSTAT=SAS-data-set

names the output data set to contain the values of statistics of fit for each model whose parameter estimation process converges. Details of the variables in this data set are provided in the section “[OUTSTAT= Data Set](#)” on page 1603.

PLOTS <(global-plot-options)> <=(plot-request-option)>**PLOTS** <(global-plot-options)> <=(plot-request-options ...)>

specifies the desired graphical output. The *global-plot-options* and *plot-request-options* are separated by spaces.

The following *global-plot-options* are available:

HISTOGRAM

plots the histogram of the response variable on the PDF plots.

KERNEL

plots the kernel estimate of the probability density of the response variable on the PDF plots.

MARKCENSORED

marks right-censored observations, if any, in the PDF and CDF plots. This option has no effect if right-censoring is not specified in the LOSS statement or if both right-censoring and left-censoring are specified.

MARKTRUNCATED

marks left-truncated observations, if any, in the PDF and CDF plots. This option has no effect if left-truncation is not specified in the LOSS statement. This option does not mark observations that are right-truncated but not left-truncated.

ONLY

turns off the default graphical output and prepares only the requested plots.

The following *plot-request-options* are available:

ALL

displays all the graphical output.

CDF

prepares a plot that compares the cumulative distribution function (CDF) estimates of all the candidate distribution models and the empirical distribution function (EDF) estimate. The plot does not contain CDF estimates for models whose parameter estimation process does not converge.

CDFPERDIST

prepares a plot of the CDF estimates of each candidate distribution model. A plot is not prepared for models whose parameter estimation process does not converge.

NONE

displays none of the graphical output. If specified, this option overrides all the other plot request options. The default graphical output is also suppressed.

PDF

prepares a plot that compares the probability density function (PDF) estimates of all the candidate distribution models. The plot does not contain PDF estimates for models whose parameter estimation process does not converge.

PDFPERDIST

prepares a plot of the PDF estimates of each candidate distribution model. A plot is not prepared for models whose parameter estimation process does not converge.

PP

prepares the probability-probability plot (known as the P-P plot) that compares the CDF estimate of each candidate distribution model against the empirical distribution function (EDF). The data shown in this plot are used for computing the EDF-based statistics of fit.

If the PLOTS= option is not specified or the ONLY *global-plot-option* is not specified, then the default graphical output is equivalent to specifying PLOTS=(CDF PDF).

PRINT <(*global-display-option*)> <=*display-option*>

PRINT <(*global-display-option*)> <=(*display-options* ...)>

specifies the desired displayed output. The *display-options* are separated by spaces.

The following *global-display-option* is available:

ONLY

turns off the default displayed output and displays only the requested output.

The following *display-options* are available:

ALL

displays all the output.

ALLFITSTATS

displays the comparison of all the statistics of fit for all the models in one table. The table does not include the models whose parameter estimation process does not converge.

CONVSTATUS

displays the convergence status of the parameter estimation process.

DESCSTATS

displays the descriptive statistics for the response variable and the regressor variables, if they are specified.

ESTIMATES | PARMEST

displays the final estimates of parameters. The estimates are not displayed for models whose parameter estimation process does not converge.

INITIALVALUES

displays the initial values and bounds used for estimating each model.

NLOHISTORY

displays the iteration history of the nonlinear optimization process used for estimating the parameters.

NLOSUMMARY

displays the summary of the nonlinear optimization process used for estimating the parameters.

NONE

displays none of the output. If specified, this option overrides all the other display options. The default displayed output is also suppressed.

SELECTION | SELECT

displays the model selection table.

STATISTICS | FITSTATS

displays the statistics of fit for each model. The statistics of fit are not displayed for models whose parameter estimation process does not converge.

If the PRINT= option is not specified or the ONLY *global-display-option* is not specified, then the default displayed output is equivalent to specifying PRINT=(SELECTION CONVSTATUS NLOSUMMARY STATISTICS ESTIMATES).

VARDEF=option

specifies the denominator to use for computing the covariance estimates. You can specify one of the following values for *option*:

DF

specifies that the number of nonmissing observations minus the model degrees of freedom (number of parameters) be used.

N

specifies that the number of nonmissing observations be used.

The details of the covariance estimation are provided in the section “[Estimating Covariance and Standard Errors](#)” on page 1565.

VERBOSE=verbosity-level

specifies the amount of messages printed to the SAS log by PROC SEVERITY. A higher number prints messages with the same or more detail.

The following options control the model estimation and selection process:

CRITERION | CRITERIA | CRIT=*criterion-option*

specifies the model selection criterion.

If two or more models are specified for estimation, then the one with the best value for the selection criterion is chosen as the best model. If the OUTMODELINFO= data set is specified, then the best model's observation has a value of 1 for the `_SELECTED_` variable. You can specify one of the following *criterion-options*:

AD

specifies the Anderson-Darling (AD) statistic value, which is computed by using the empirical distribution function (EDF) estimate, as the selection criterion. A lower value is deemed better.

AIC

specifies the Akaike's information criterion (AIC) as the selection criterion. A lower value is deemed better.

AICC

specifies the finite-sample corrected Akaike's information criterion (AICC) as the selection criterion. A lower value is deemed better.

BIC

specifies Schwarz Bayesian information criterion (BIC) as the selection criterion. A lower value is deemed better.

CUSTOM

specifies the custom objective function as the selection criterion. You can specify this only if you also specify the **OBJECTIVE=** option. A lower value is deemed better.

CVM

specifies the Cramér-von Mises (CvM) statistic value, which is computed by using the empirical distribution function (EDF) estimate, as the selection criterion. A lower value is deemed better.

KS

specifies the Kolmogorov-Smirnov (KS) statistic value, which is computed by using the empirical distribution function (EDF) estimate, as the selection criterion. A lower value is deemed better.

LOGLIKELIHOOD | LL

specifies $-2 * \log(L)$ as the selection criterion, where L is the likelihood of the data. A lower value is deemed better. This is the default.

More details about these *criterion-options* are provided in the section “[Statistics of Fit](#)” on page 1575.

EMPIRICALCDF | EDF=*method*

specifies the method to use for computing the nonparametric or empirical estimate of the cumulative distribution function of the data. You can specify one of the following values for *method*:

AUTOMATIC | AUTO

specifies that the method be chosen automatically based on the data specification. This option is the default. If no censoring or truncation is specified, then the standard empirical estimation method (STANDARD) is chosen. If right-censoring or left-censoring are both specified, then Turnbull's estimation method (TURNBULL) is chosen. For all other combinations of censoring and truncation, the Kaplan-Meier method (KAPLANMEIER) is chosen.

KAPLANMEIER | KM

specifies that the product limit estimator proposed by Kaplan and Meier (1958) be used. You cannot specify this method when both right-censoring and left-censoring are specified.

MODIFIEDKM | MKM <(options)>

specifies that the modified product limit estimator be used. This method allows Kaplan-Meier's product limit estimates to be more robust by ignoring the contributions to the estimate due to small risk-set sizes. The risk set is the set of observations at the risk of failing, where an observation is said to fail if it has not been processed yet and might experience censoring or truncation. The minimum risk-set size that makes it eligible to be included in the estimation can be specified either as an absolute lower bound on the size (RSLB= option) or a relative lower bound determined by the formula cn^α proposed by Lai and Ying (1991). Values of c and α can be specified by using the C= and ALPHA= options, respectively. By default, the relative lower bound is used with values of $c = 1$ and $\alpha = 0.5$. However, you can modify the default by using the following *options*:

ALPHA | A=number

specifies the value to use for α when the lower bound on the risk set size is defined as cn^α . This value must satisfy $0 < \alpha < 1$.

C=number

specifies the value to use for c when the lower bound on the risk set size is defined as cn^α . This value must satisfy $c > 0$.

RSLB=number

specifies the absolute lower bound on the risk set size to be included in the estimate.

You cannot specify this method when both right-censoring and left-censoring are specified.

STANDARD | STD

specifies that the standard empirical estimation method be used. This ignores any censoring or truncation information even if specified, and can thus result in estimates that are more biased than those obtained with other methods more suitable for such data. You cannot specify this method when both right-censoring and left-censoring are specified.

TURNBULL | EM <(options)>

specifies that the Turnbull's method be used. This method is used when both right-censoring and left-censoring are specified. An iterative expectation-maximization (EM) algorithm proposed by Turnbull (1976) is used to compute the empirical estimates. If truncation is also specified, then the modification suggested by Frydman (1994) is used. You can modify the default behavior of the EM algorithm by using the following *options*:

Experimental

ENSUREMLE

specifies that the final EDF estimates be maximum likelihood estimates. The Kuhn-Tucker conditions are computed for the likelihood maximization problem and checked to ensure that EM algorithm converges to maximum likelihood estimates. The method generalizes the method proposed by Gentleman and Geyer (1994) by taking into account the truncation information, if specified.

EPS=number

specifies the maximum relative error to be allowed between estimates of two consecutive iterations. This criterion is used to check the convergence of the algorithm. If you do not specify this option, then PROC SEVERITY uses a default value of 1.0E–8.

MAXITER=number

specifies the maximum number of iterations to attempt to find the empirical estimates. If you do not specify this option, then PROC SEVERITY uses a default value of 500.

ZEROPROB=number

specifies the threshold below which an empirical estimate of the probability is considered zero. This option is used to decide if the final estimate is a maximum likelihood estimate. This option does not have an effect if you do not specify the ENSUREMLE option. If you specify the ENSUREMLE option, but do not specify this option, then PROC SEVERITY uses a default value of 1.0E–8.

More details about each of the methods are provided in the section “[Empirical Distribution Function Estimation Methods](#)” on page 1569.

OBJECTIVE=symbol-name

names the symbol that represents the objective function in the specified SAS programming statements. For each model to be estimated, PROC SEVERITY executes the programming statements to compute the value of this symbol for each observation. The values are added across all observations to obtain the value of the objective function. The optimization algorithm estimates the model parameters such that the objective function value is *minimized*. A separate optimization problem is solved for each candidate distribution. If a BY statement is specified, then a separate optimization problem is solved for each candidate distribution within each BY group.

Experimental

More details about writing SAS programming statements to define your own objective function are provided in the section “[Custom Objective Functions \(Experimental\)](#)” on page 1596.

BY Statement

A BY statement can be used in the SEVERITY procedure to process the input data set in groups of observations defined by the BY variables.

When a BY statement appears, the procedure expects the input data set to be sorted in the order of the BY variables.

LOSS Statement

LOSS < *response-variable-name* > < / *censoring-truncation-options* > ;

The LOSS statement specifies the name of the response or loss variable whose distribution needs to be modeled. You can also specify additional options to indicate any truncation or censoring of the response. The specification of response variable is optional if at least one type of censoring is specified. You must specify a response variable if no censoring is specified. If you specify more than one LOSS statement, then the first statement is used.

All the analysis variables specified in this statement must be present in the input data set that is specified by using the DATA= option in the PROC SEVERITY statement. The response variable is expected to have nonmissing values. If the variable has a missing value in an observation, then a warning is written to the SAS log and that observation is ignored.

The following *censoring-truncation-options* can be used in the LOSS statement:

LEFTCENSORED | **LC**=*variable-name*

LEFTCENSORED | **LC**=*number*

specifies the left-censoring variable or a global left-censoring limit.

You can use the *variable-name* argument to specify a data set variable that contains the left-censoring limit. If the value of this variable is missing, then PROC SEVERITY assumes that such observations are not left-censored.

Alternatively, you can use the *number* argument to specify a left-censoring limit value that applies to all the observations in the data set. This limit must be a nonzero positive number.

By definition of left-censoring, an exact value of the response is not known when it is less than or equal to the left-censoring limit. If the response variable is specified and the value of that variable is less than or equal to the value of the left-censoring limit for some observations, then PROC SEVERITY treats such observations as left-censored and the value of the response variable is ignored. If the response variable is specified and the value of that variable is greater than the value of the left-censoring limit for some observations, then PROC SEVERITY assumes that such observations are not left-censored and the value of the left-censoring limit is ignored.

If both right-censoring and left-censoring limits are specified, then the left-censoring limit must be greater than or equal to the right-censoring limit. If both limits are identical, then the observation is assumed to be uncensored.

More details about left-censoring are provided in the section “[Censoring and Truncation](#)” on page 1561.

LEFTTRUNCATED | **LT**=*variable-name* < (*left-truncation-option*) >

LEFTTRUNCATED | **LT**=*number* < (*left-truncation-option*) >

specifies the left-truncation variable or a global left-truncation threshold.

You can use the *variable-name* argument to specify a data set variable that contains the left-truncation threshold. If the value of this variable is missing or 0 for some observations, then PROC SEVERITY assumes that such observations are not left-truncated.

Alternatively, you can use the *number* argument to specify a left-truncation threshold that applies to all the observations in the data set. This threshold must be a nonzero positive number.

It is assumed that the response variable contains the observed values. By definition of left-truncation, you can observe only a value that is greater than the left-truncation threshold. If a response variable value is less than or equal to the left-truncation threshold, a warning is printed to the SAS log, and the observation is ignored. More details about left-truncation are provided in the section “[Censoring and Truncation](#)” on page 1561.

The following left-truncation option can be specified for an alternative interpretation of the left-truncation threshold:

PROBOBSERVED | POBS=*number*

specifies the probability of observability, which is defined as the probability that the underlying severity event is observed (and recorded) for the specified left-threshold value.

The specified *number* must lie in the (0.0, 1.0] interval. A value of 1.0 is equivalent to specifying that there is no left-truncation, because it means that no severity events can occur with a value less than or equal to the threshold. If you specify value of 1.0, PROC SEVERITY prints a warning to the SAS log and proceeds by assuming that LEFTTRUNCATED= option is not specified.

More details are provided in the section “[Probability of Observability](#)” on page 1562.

RIGHTCENSORED | RC=*variable-name*

RIGHTCENSORED | RC=*number*

specifies the right-censoring variable or a global right-censoring limit.

You can use the *variable-name* argument to specify a data set variable that contains the right-censoring limit. If the value of this variable is missing, then PROC SEVERITY assumes that such observations are not right-censored.

Alternatively, you can use the *number* argument to specify a right-censoring limit value that applies to all the observations in the data set. This limit must be a nonzero positive number.

By definition of right-censoring, an exact value of the response is not known when it is greater than or equal to the right-censoring limit. If the response variable is specified and the value of that variable is greater than or equal to the value of the right-censoring limit for some observations, then PROC SEVERITY treats such observations as right-censored and the value of the response variable is ignored. If the response variable is specified and the value of that variable is less than the value of the right-censoring limit for some observations, then PROC SEVERITY assumes that such observations are not right-censored and the value of the right-censoring limit is ignored.

If both right-censoring and left-censoring limits are specified, then the left-censoring limit must be greater than or equal to the right-censoring limit. If both limits are identical, then the observation is assumed to be uncensored.

More details about right-censoring are provided in the section “[Censoring and Truncation](#)” on page 1561.

RIGHTTRUNCATED | **RT=***variable-name*

RIGHTTRUNCATED | **RT=***number*

specifies the right-truncation variable or a global right-truncation threshold.

You can use the *variable-name* argument to specify a data set variable that contains the right-truncation threshold. If the value of this variable is missing for some observations, then PROC SEVERITY assumes that such observations are not right-truncated.

Alternatively, you can use the *number* argument to specify a right-truncation threshold that applies to all the observations in the data set. This threshold must be a nonzero positive number.

It is assumed that the response variable contains the observed values. By definition of right-truncation, you can observe only a value that is less than or equal to the right-truncation threshold. If a response variable value is greater than the right-truncation threshold, a warning is printed to the SAS log, and the observation is ignored. More details about right-truncation are provided in the section “[Censoring and Truncation](#)” on page 1561.

WEIGHT Statement

WEIGHT *variable-name* ;

The WEIGHT statement specifies the name of a variable whose values represent the weight of each observation. PROC SEVERITY associates a weight of w to each observation, where w is the value of the WEIGHT variable for the observation. If the weight value is missing or less than or equal to 0, then the observation is ignored and a warning is written to the SAS log. When the WEIGHT statement is not specified, each observation is assigned a weight of 1. If you specify more than one WEIGHT statement, then the last statement is used.

The weights are normalized so that they add up to the actual sample size. In particular, weight of each observation is multiplied by $\frac{N}{\sum_{i=1}^N w_i}$, where N is the sample size.

SCALEMODEL Statement

SCALEMODEL *regressor-variable-list* ;

The SCALEMODEL statement specifies regression variables. All the variables specified in this statement must be present in the input data set that is specified by the DATA= option in the PROC SEVERITY statement. The scale parameter of each candidate distribution is linked to a linear combination of these regression variables along with an intercept. If a distribution does not have a scale parameter, then a model based on that distribution is not estimated. If you specify more than one SCALEMODEL statement, then the first statement is used.

The regressor variables are expected to have nonmissing values. If any of the variables has a missing value in an observation, then a warning is written to the SAS log and that observation is ignored.

More details about modeling regression effects are provided in the section “[Estimating Regression Effects](#)” on page 1566.

DIST Statement

DIST *distribution-name-or-keyword* < (*distribution-option*) < *distribution-name-or-keyword* < (*distribution-option*) > > ... > ;

The DIST statement specifies candidate distributions to be estimated by the SEVERITY procedure. You can specify multiple DIST statements, and each statement can contain one or more distribution specifications.

For your convenience, PROC SEVERITY provides the following 10 different predefined distributions (the name in the parentheses is the name to use in the DIST statement): Burr (BURR), exponential (EXP), gamma (GAMMA), generalized Pareto (GPD), inverse Gaussian or Wald (IGAUSS), lognormal (LOGN), Pareto (PARETO), Tweedie (TWEEDIE), scaled Tweedie (STWEEDIE), and Weibull (WEIBULL). These are described in detail in the section “[Predefined Distributions](#)” on page 1551.

You can specify any of the predefined distributions or any distribution that you have defined. If the specified distribution is not a predefined distribution, then you must submit the CMPLIB= system option with appropriate libraries before you submit the PROC SEVERITY step to enable the procedure to find the functions associated with your distribution. The predefined distributions are defined in the Sashelp.Svrtldist library. However, you are not required to specify this library in the CMPLIB= system option.

As a convenience, you can also use a shortcut keyword `_PREDEFINED_` to indicate that you want to fit all the predefined distributions. **NOTE:** The TWEEDIE and STWEEDIE distributions are not included by this keyword. If you want to fit these distributions, then you must specify them explicitly.

If you do not specify any DIST statement, then PROC SEVERITY does not fit any distributions and produces the empirical estimates of the cumulative distribution function provided that you have specified the OUTCDF= option or requested a CDF plot.

The following *distribution-option* values can be used in the DIST statement for a distribution name that is not a shortcut keyword:

INIT=(*name=value* ... *name=value*)

specifies the initial values to be used for the distribution parameters to start the parameter estimation process. The values must be specified by parameter names. The parameter names must match the names used in the model definition. For example, let a model M’s definition contain a M_PDF function with following signature:

```
function M_PDF(x, alpha, beta);
```

For this model, the names **alpha** and **beta** must be used for the INIT option. The names are case-insensitive. If you do not specify initial values for some parameters in the INIT statement, then a default value of 0.001 is assumed for those parameters. If you specify an incorrect parameter, PROC SEVERITY prints a warning to the SAS log and does not fit the model. All specified values must be nonmissing.

If you are modeling regression effects, then the initial value of the first distribution parameter (**alpha** in the preceding example) should be the initial *base* value of the scale parameter or log-transformed scale parameter. More details are provided in the section “[Estimating Regression Effects](#)” on page 1566.

The use of INIT= option is one of the three methods available for initializing the parameters. You can find more details in the section “[Parameter Initialization](#)” on page 1565. If none of the initialization methods is used, then PROC SEVERITY initializes all parameters to 0.001.

NLOPTIONS Statement

NLOPTIONS *options* ;

The SEVERITY procedure uses the nonlinear optimization (NLO) subsystem to perform the nonlinear optimization of the likelihood function to obtain the estimates of distribution and regression parameters. You can use the NLOPTIONS statement to control different aspects of this optimization process. For most problems, the default settings of the optimization process are adequate. However, in some cases it might be useful to change the optimization technique or to change the maximum number of iterations. The following statement uses the MAXITER= option to set the maximum number of iterations to 200 and uses the TECH= option to change the optimization technique to the double-dogleg optimization (DBLDOG) rather than the default technique, the trust region optimization (TRUREG), used in the SEVERITY procedure:

```
nloptions tech=dbldog maxiter=200;
```

A discussion of the full range of *options* that can be used with the NLOPTIONS statement is given in Chapter 6, “[Nonlinear Optimization Methods](#).” The SEVERITY procedure supports all of those options except the options that are related to displaying the optimization information. You can use the [PRINT=](#) option in the PROC SEVERITY statement to request the optimization summary and iteration history. If you specify more than one NLOPTIONS statement, then the first statement is used.

Programming Statements ([Experimental](#))

You can use a series of programming statements that use variables in the input data set specified by DATA= option in the PROC SEVERITY statement to assign a value to an objective function symbol. The objective function symbol must be specified using the [OBJECTIVE=](#) option in the PROC SEVERITY statement. If you do not specify the [OBJECTIVE=](#) option in the PROC SEVERITY statement, then the programming statements are ignored and models are estimated using the maximum likelihood method.

You can use most DATA step statements and functions in your program. Any additional functions, restrictions, and differences are listed in the section “[Custom Objective Functions \(\[Experimental\]\(#\)\)](#)” on page 1596.

Details: SEVERITY Procedure

Predefined Distributions

PROC SEVERITY assumes the following model for the response variable Y

$$Y \sim \mathcal{F}(\Theta)$$

where \mathcal{F} is a continuous probability distribution with parameters Θ . The model hypothesizes that the observed response is generated from a stochastic process that is governed by the distribution \mathcal{F} . This model is typically referred to as the error model. Given a representative input sample of response variable values, PROC SEVERITY estimates the model parameters for any distribution \mathcal{F} and computes the statistics of fit for each model. This enables you to find the distribution that is most likely to generate the observed sample.

A set of predefined distributions is provided with the SEVERITY procedure. A summary of the distributions is provided in [Table 23.2](#). For each distribution, the table lists the name of the distribution that should be used in the DIST statement, the parameters of the distribution along with their bounds, and the mathematical expressions for the probability density function (PDF) and cumulative distribution function (CDF) of the distribution.

All the predefined distributions, except LOGN and TWEEDIE, are parameterized such that their first parameter is the scale parameter. For LOGN, the first parameter μ is a log-transformed scale parameter. TWEEDIE does not have a scale parameter. The presence of scale parameter or a log-transformed scale parameter enables you to use all of the predefined distributions, except TWEEDIE, as a candidate for estimating regression effects.

A distribution model is associated with each predefined distribution. You can also define your own distribution model, which is a set of functions and subroutines that you define by using the FCMP procedure. See the section “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579 for more details.

Table 23.2 Predefined SEVERITY Distributions

Name	Distribution	Parameters	PDF (f) and CDF (F)
BURR	Burr	$\theta > 0, \alpha > 0,$ $\gamma > 0$	$f(x) = \frac{\alpha \gamma z^\gamma}{x(1+z^\gamma)^{(\alpha+1)}}$ $F(x) = 1 - \left(\frac{1}{1+z^\gamma}\right)^\alpha$
EXP	Exponential	$\theta > 0$	$f(x) = \frac{1}{\theta} e^{-z}$ $F(x) = 1 - e^{-z}$
GAMMA	Gamma	$\theta > 0, \alpha > 0$	$f(x) = \frac{z^\alpha e^{-z}}{x \Gamma(\alpha)}$ $F(x) = \frac{\gamma(\alpha, z)}{\Gamma(\alpha)}$
GPD	Generalized Pareto	$\theta > 0, \xi > 0$	$f(x) = \frac{1}{\theta} (1 + \xi z)^{-1-1/\xi}$ $F(x) = 1 - (1 + \xi z)^{-1/\xi}$
IGAUSS	Inverse Gaussian (Wald)	$\theta > 0, \alpha > 0$	$f(x) = \frac{1}{\theta} \sqrt{\frac{\alpha}{2\pi z^3}} e^{-\frac{\alpha(z-1)^2}{2z}}$ $F(x) = \Phi\left((z-1)\sqrt{\frac{\alpha}{z}}\right) + \Phi\left(-(z+1)\sqrt{\frac{\alpha}{z}}\right) e^{2\alpha}$
LOGN	Lognormal	μ (no bounds), $\sigma > 0$	$f(x) = \frac{1}{x\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{\log(x)-\mu}{\sigma}\right)^2}$ $F(x) = \Phi\left(\frac{\log(x)-\mu}{\sigma}\right)$
PARETO	Pareto	$\theta > 0, \alpha > 0$	$f(x) = \frac{\alpha \theta^\alpha}{(x+\theta)^{\alpha+1}}$ $F(x) = 1 - \left(\frac{\theta}{x+\theta}\right)^\alpha$
TWEEDIE	Tweedie ⁶	$\mu > 0, \phi > 0,$ $p > 1$	$f(x) = a(x, \phi) \exp\left[\frac{1}{\phi} \left(\frac{x\mu^{1-p}}{1-p} - \kappa(\mu, p)\right)\right]$ $F(x) = \int_0^x f(t) dt$
STWEEDIE	Scaled Tweedie ⁶	$\theta > 0, \lambda > 0,$ $1 < p < 2$	$f(x) = a(x, \theta, \lambda, p) \exp\left(-\frac{x}{\theta} - \lambda\right)$ $F(x) = \int_0^x f(t) dt$
WEIBULL	Weibull	$\theta > 0, \tau > 0$	$f(x) = \frac{1}{x} \tau z^\tau e^{-z^\tau}$ $F(x) = 1 - e^{-z^\tau}$

Notes:

1. $z = x/\theta$, wherever z is used.
2. θ denotes the scale parameter for all the distributions. For LOGN, $\log(\theta) = \mu$.
3. Parameters are listed in the order in which they are defined in the distribution model.
4. $\gamma(a, b) = \int_0^b t^{a-1} e^{-t} dt$ is the lower incomplete gamma function.
5. $\Phi(y) = \frac{1}{2} \left(1 + \operatorname{erf}\left(\frac{y}{\sqrt{2}}\right)\right)$ is the standard normal CDF.
6. See the section “[Tweedie Distributions](#)” on page 1553 for more details.

Tweedie Distributions

Tweedie distributions are a special case of the exponential dispersion family (Jørgensen, 1987) with a property that the variance of the distribution is equal to $\phi\mu^p$, where μ is the mean of the distribution, ϕ is a dispersion parameter, and p is an index parameter as discovered by Tweedie (1984). The distribution is defined for all values of p except for values of p in the open interval $(0, 1)$. Many important known distributions are a special case of Tweedie distributions including normal ($p=0$), Poisson ($p=1$), gamma ($p=2$), and the inverse Gaussian ($p=3$). Apart from these special cases, the probability density function (PDF) of the Tweedie distribution does not have an analytic expression. For $p > 1$, it has the form (Dunn and Smyth 2005),

$$f(x; \mu, \phi, p) = a(x, \phi) \exp \left[\frac{1}{\phi} \left(\frac{x\mu^{1-p}}{1-p} - \kappa(\mu, p) \right) \right]$$

where $\kappa(\mu, p) = \mu^{2-p}/(2-p)$ for $p \neq 2$ and $\kappa(\mu, p) = \log(\mu)$ for $p = 2$. The function $a(x, \phi)$ does not have an analytical expression. It is typically evaluated using series expansion methods described in Dunn and Smyth (2005).

For $1 < p < 2$, the Tweedie distribution is a compound Poisson-gamma mixture distribution, which is the distribution of S defined as

$$S = \sum_{i=1}^N X_i$$

where $N \sim \text{Poisson}(\lambda)$ and $X_i \sim \text{gamma}(\alpha, \theta)$ are iid gamma random variables with shape parameter α and scale parameter θ . At $X = 0$, the density is a probability mass that is governed by the Poisson distribution, and for values of $X > 0$, it is a mixture of gamma variates with Poisson mixing probability. The parameters λ , α and θ are related to the natural parameters μ , ϕ , and p of the Tweedie distribution as

$$\begin{aligned} \lambda &= \frac{\mu^{2-p}}{\phi(2-p)} \\ \alpha &= \frac{2-p}{p-1} \\ \theta &= \phi(p-1)\mu^{p-1} \end{aligned}$$

The mean of a Tweedie distribution is positive for $p > 1$.

Two predefined versions of the Tweedie distribution are provided with the SEVERITY procedure. The first version, named **TWEEDIE** and defined for $p > 1$, has the natural parameterization with parameters μ , ϕ , and p . The second version, named **STWEEDIE** and defined for $1 < p < 2$, is the version with a scale parameter. It corresponds to the compound Poisson-gamma distribution with gamma scale parameter θ , Poisson mean parameter λ , and the index parameter p . The index parameter decides the shape parameter α of the gamma distribution as

$$\alpha = \frac{2-p}{p-1}$$

The parameters θ and λ of the **STWEEDIE** distribution are related to the parameters μ and ϕ of the **TWEEDIE** distribution as

$$\begin{aligned} \mu &= \lambda\theta\alpha \\ \phi &= \frac{(\lambda\theta\alpha)^{2-p}}{\lambda(2-p)} = \frac{\theta}{(p-1)(\lambda\theta\alpha)^{p-1}} \end{aligned}$$

You can fit either version when there are no regression variables. Each version has its own merits. If you fit the TWEEDIE version, you have the direct estimate of the overall mean of the distribution. If you are interested in the most practical range of the index parameter $1 < p < 2$, then you can fit the STWEEDIE version, which provides you direct estimates of the Poisson and gamma components that comprise the distribution (an estimate of the gamma shape parameter α is easily obtained from the estimate of p).

If you want to estimate the effect of exogenous (regression) variables on the distribution, then you must use the STWEEDIE version, because PROC SEVERITY requires a distribution to have a scale parameter in order to estimate regression effects. See the section “[Estimating Regression Effects](#)” on page 1566 for more details. The gamma scale parameter θ is the scale parameter of the STWEEDIE distribution. If you are interested in determining the effect of regression variables on the mean of the distribution, you can do so by first fitting the STWEEDIE distribution to determine the effect of the regression variables on the scale parameter θ . Then, you can easily estimate how the mean of the distribution μ is affected by the regression variables using the relationship $\mu = c\theta$, where $c = \lambda\alpha = \lambda(2-p)/(p-1)$. The estimates of the regression parameters remain the same, whereas the estimate of the intercept parameter is adjusted by the estimates of the λ and p parameters.

Parameter Initialization for Predefined Distributions

The parameters are initialized by using the method of moments for all the distributions, except for the gamma and the Weibull distributions. For the gamma distribution, approximate maximum likelihood estimates are used. For the Weibull distribution, the method of percentile matching is used.

Given n observations of the severity value y_i ($1 \leq i \leq n$), the estimate of k th raw moment is denoted by m_k and computed as

$$m_k = \frac{1}{n} \sum_{i=1}^n y_i^k$$

The 100 p th percentile is denoted by π_p ($0 \leq p \leq 1$). By definition, π_p satisfies

$$F(\pi_p-) \leq p \leq F(\pi_p)$$

where $F(\pi_p-) = \lim_{h \downarrow 0} F(\pi_p - h)$. PROC SEVERITY uses the following practical method of computing π_p . Let $\hat{F}_n(y)$ denote the empirical distribution function (EDF) estimate at a severity value y . Let y_p^- and y_p^+ denote two consecutive values in the ascending sequence of y values such that $\hat{F}_n(y_p^-) < p$ and $\hat{F}_n(y_p^+) \geq p$. Then, the estimate $\hat{\pi}_p$ is computed as

$$\hat{\pi}_p = y_p^- + \frac{p - \hat{F}_n(y_p^-)}{\hat{F}_n(y_p^+) - \hat{F}_n(y_p^-)}(y_p^+ - y_p^-)$$

Let ϵ denote the smallest double-precision floating-point number such that $1 + \epsilon > 1$. This machine precision constant can be obtained by using the CONSTANT function in Base SAS software.

The details of how parameters are initialized for each predefined distribution are as follows:

BURR The parameters are initialized by using the method of moments. The k th raw moment of the Burr distribution is:

$$E[X^k] = \frac{\theta^k \Gamma(1 + k/\gamma) \Gamma(\alpha - k/\gamma)}{\Gamma(\alpha)}, \quad -\gamma < k < \alpha\gamma$$

Three moment equations $E[X^k] = m_k$ ($k = 1, 2, 3$) need to be solved for initializing the three parameters of the distribution. In order to get an approximate closed form solution, the second shape parameter $\hat{\gamma}$ is initialized to a value of 2. If $2m_3 - 3m_1m_2 > 0$, then simplifying and solving the moment equations yields the following feasible set of initial values:

$$\hat{\theta} = \sqrt{\frac{m_2m_3}{2m_3 - 3m_1m_2}}, \quad \hat{\alpha} = 1 + \frac{m_3}{2m_3 - 3m_1m_2}, \quad \hat{\gamma} = 2$$

If $2m_3 - 3m_1m_2 < \epsilon$, then the parameters are initialized as follows:

$$\hat{\theta} = \sqrt{m_2}, \quad \hat{\alpha} = 2, \quad \hat{\gamma} = 2$$

EXP The parameters are initialized by using the method of moments. The k th raw moment of the exponential distribution is:

$$E[X^k] = \theta^k \Gamma(k + 1), \quad k > -1$$

Solving $E[X] = m_1$ yields the initial value of $\hat{\theta} = m_1$.

GAMMA The parameter α is initialized by using its *approximate* maximum likelihood (ML) estimate. For a set of n iid observations y_i ($1 \leq i \leq n$), drawn from a gamma distribution, the log likelihood, l , is defined as follows:

$$\begin{aligned} l &= \sum_{i=1}^n \log \left(y_i^{\alpha-1} \frac{e^{-y_i/\theta}}{\theta^\alpha \Gamma(\alpha)} \right) \\ &= (\alpha - 1) \sum_{i=1}^n \log(y_i) - \frac{1}{\theta} \sum_{i=1}^n y_i - n\alpha \log(\theta) - n \log(\Gamma(\alpha)) \end{aligned}$$

Using a shorter notation of \sum to denote $\sum_{i=1}^n$ and solving the equation $\partial l / \partial \theta = 0$ yields the following ML estimate of θ :

$$\hat{\theta} = \frac{\sum y_i}{n\alpha} = \frac{m_1}{\alpha}$$

Substituting this estimate in the expression of l and simplifying gives

$$l = (\alpha - 1) \sum \log(y_i) - n\alpha - n\alpha \log(m_1) + n\alpha \log(\alpha) - n \log(\Gamma(\alpha))$$

Let d be defined as follows:

$$d = \log(m_1) - \frac{1}{n} \sum \log(y_i)$$

Solving the equation $\partial l / \partial \alpha = 0$ yields the following expression in terms of the digamma function, $\psi(\alpha)$:

$$\log(\alpha) - \psi(\alpha) = d$$

The digamma function can be approximated as follows:

$$\hat{\psi}(\alpha) \approx \log(\alpha) - \frac{1}{\alpha} \left(0.5 + \frac{1}{12\alpha + 2} \right)$$

This approximation is within 1.4% of the true value for all the values of $\alpha > 0$ except when α is arbitrarily close to the positive root of the digamma function (which is approximately 1.461632). Even for the values of α that are close to the positive root, the absolute error between true and approximate values is still acceptable ($|\hat{\psi}(\alpha) - \psi(\alpha)| < 0.005$ for $\alpha > 1.07$). Solving the equation that arises from this approximation yields the following estimate of α :

$$\hat{\alpha} = \frac{3 - d + \sqrt{(d - 3)^2 + 24d}}{12d}$$

If this approximate ML estimate is infeasible, then the method of moments is used. The k th raw moment of the gamma distribution is:

$$E[X^k] = \theta^k \frac{\Gamma(\alpha + k)}{\Gamma(\alpha)}, \quad k > -\alpha$$

Solving $E[X] = m_1$ and $E[X^2] = m_2$ yields the following initial value for α :

$$\hat{\alpha} = \frac{m_1^2}{m_2 - m_1^2}$$

If $m_2 - m_1^2 < \epsilon$ (almost zero sample variance), then α is initialized as follows:

$$\hat{\alpha} = 1$$

After computing the estimate of α , the estimate of θ is computed as follows:

$$\hat{\theta} = \frac{m_1}{\hat{\alpha}}$$

Both the maximum likelihood method and the method of moments arrive at the same relationship between $\hat{\alpha}$ and $\hat{\theta}$.

GPD

The parameters are initialized by using the method of moments. Notice that for $\xi > 0$, the CDF of the generalized Pareto distribution (GPD) is:

$$\begin{aligned} F(x) &= 1 - \left(1 + \frac{\xi x}{\theta}\right)^{-1/\xi} \\ &= 1 - \left(\frac{\theta/\xi}{x + \theta/\xi}\right)^{1/\xi} \end{aligned}$$

This is equivalent to a Pareto distribution with scale parameter $\theta_1 = \theta/\xi$ and shape parameter $\alpha = 1/\xi$. Using this relationship, the parameter initialization method used for the PARETO distribution is used to get the following initial values for the parameters of the GPD distribution:

$$\hat{\theta} = \frac{m_1 m_2}{2(m_2 - m_1^2)}, \quad \hat{\xi} = \frac{m_2 - 2m_1^2}{2(m_2 - m_1^2)}$$

If $m_2 - m_1^2 < \epsilon$ (almost zero sample variance) or $m_2 - 2m_1^2 < \epsilon$, then the parameters are initialized as follows:

$$\hat{\theta} = \frac{m_1}{2}, \quad \hat{\xi} = \frac{1}{2}$$

IGAUSS

The parameters are initialized by using the method of moments. Note that the standard parameterization of the inverse Gaussian distribution (also known as the Wald distribution), in terms of the location parameter μ and shape parameter λ , is as follows (Klugman, Panjer, and Willmot 1998, p. 583):

$$f(x) = \sqrt{\frac{\lambda}{2\pi x^3}} \exp\left(\frac{-\lambda(x - \mu)^2}{2\mu^2 x}\right)$$

$$F(x) = \Phi\left(\left(\frac{x}{\mu} - 1\right) \sqrt{\frac{\lambda}{x}}\right) + \Phi\left(-\left(\frac{x}{\mu} + 1\right) \sqrt{\frac{\lambda}{x}}\right) \exp\left(\frac{2\lambda}{\mu}\right)$$

For this parameterization, it is known that the mean is $E[X] = \mu$ and the variance is $Var[X] = \mu^3/\lambda$, which yields the second raw moment as $E[X^2] = \mu^2(1 + \mu/\lambda)$ (computed by using $E[X^2] = Var[X] + (E[X])^2$).

The predefined IGAUSS distribution in PROC SEVERITY uses the following alternate parameterization to allow the distribution to have a scale parameter, θ :

$$f(x) = \sqrt{\frac{\alpha\theta}{2\pi x^3}} \exp\left(\frac{-\alpha(x - \theta)^2}{2x\theta}\right)$$

$$F(x) = \Phi\left(\left(\frac{x}{\theta} - 1\right) \sqrt{\frac{\alpha\theta}{x}}\right) + \Phi\left(-\left(\frac{x}{\theta} + 1\right) \sqrt{\frac{\alpha\theta}{x}}\right) \exp(2\alpha)$$

The parameters θ (scale) and α (shape) of this alternate form are related to the parameters μ and λ of the preceding form such that $\theta = \mu$ and $\alpha = \lambda/\mu$. Using this relationship, the first and second raw moments of the IGAUSS distribution are:

$$E[X] = \theta$$

$$E[X^2] = \theta^2 \left(1 + \frac{1}{\alpha}\right)$$

Solving $E[X] = m_1$ and $E[X^2] = m_2$ yields the following initial values:

$$\hat{\theta} = m_1, \quad \hat{\alpha} = \frac{m_1^2}{m_2 - m_1^2}$$

If $m_2 - m_1^2 < \epsilon$ (almost zero sample variance), then the parameters are initialized as follows:

$$\hat{\theta} = m_1, \quad \hat{\alpha} = 1$$

LOGN

The parameters are initialized by using the method of moments. The k th raw moment of the lognormal distribution is:

$$E[X^k] = \exp\left(k\mu + \frac{k^2\sigma^2}{2}\right)$$

Solving $E[X] = m_1$ and $E[X^2] = m_2$ yields the following initial values:

$$\hat{\mu} = 2 \log(m_1) - \frac{\log(m_2)}{2}, \quad \hat{\sigma} = \sqrt{\log(m_2) - 2 \log(m_1)}$$

PARETO The parameters are initialized by using the method of moments. The k th raw moment of the Pareto distribution is:

$$E[X^k] = \frac{\theta^k \Gamma(k+1) \Gamma(\alpha-k)}{\Gamma(\alpha)}, -1 < k < \alpha$$

Solving $E[X] = m_1$ and $E[X^2] = m_2$ yields the following initial values:

$$\hat{\theta} = \frac{m_1 m_2}{m_2 - 2m_1^2}, \quad \hat{\alpha} = \frac{2(m_2 - m_1^2)}{m_2 - 2m_1^2}$$

If $m_2 - m_1^2 < \epsilon$ (almost zero sample variance) or $m_2 - 2m_1^2 < \epsilon$, then the parameters are initialized as follows:

$$\hat{\theta} = m_1, \quad \hat{\alpha} = 2$$

TWEEDIE The parameter p is initialized by assuming that the sample is generated from a gamma distribution with shape parameter α and by computing $\hat{p} = \frac{\hat{\alpha}+2}{\hat{\alpha}+1}$. The initial value $\hat{\alpha}$ is obtained from using the method previously described for the GAMMA distribution. The parameter μ is the mean of the distribution. Hence, it is initialized to the sample mean as

$$\hat{\mu} = m_1$$

Variance of a Tweedie distribution is equal to $\phi \mu^p$. Thus, the sample variance is used to initialize the value of ϕ as

$$\hat{\phi} = \frac{m_2 - m_1^2}{\hat{\mu} \hat{p}}$$

STWEEDIE STWEEDIE is a compound Poisson-gamma mixture distribution with mean $\mu = \lambda \theta \alpha$, where α is the shape parameter of the gamma random variables in the mixture and the parameter p is determined solely by α . First, the parameter p is initialized by assuming that the sample is generated from a gamma distribution with shape parameter α and by computing $\hat{p} = \frac{\hat{\alpha}+2}{\hat{\alpha}+1}$. The initial value $\hat{\alpha}$ is obtained from using the method previously described for the GAMMA distribution. As done for initializing the parameters of the TWEEDIE distribution, the sample mean and variance are used to compute the values $\hat{\mu}$ and $\hat{\phi}$ as

$$\hat{\mu} = m_1$$

$$\hat{\phi} = \frac{m_2 - m_1^2}{\hat{\mu} \hat{p}}$$

Based on the relationship between the parameters of TWEEDIE and STWEEDIE distributions described in the section “[Tweedie Distributions](#)” on page 1553, values of θ and λ are initialized as

$$\hat{\theta} = \hat{\phi}(\hat{p} - 1)\hat{\mu}^{p-1}$$

$$\hat{\lambda} = \frac{\hat{\mu}}{\hat{\theta} \hat{\alpha}}$$

WEIBULL The parameters are initialized by using the percentile matching method. Let $q1$ and $q3$ denote the estimates of the 25th and 75th percentiles, respectively. Using the formula for the CDF of Weibull distribution, they can be written as

$$1 - \exp(-(q1/\theta)^\tau) = 0.25$$

$$1 - \exp(-(q3/\theta)^\tau) = 0.75$$

Simplifying and solving these two equations yields the following initial values:

$$\hat{\theta} = \exp\left(\frac{r \log(q1) - \log(q3)}{r - 1}\right), \quad \hat{\tau} = \frac{\log(\log(4))}{\log(q3) - \log(\hat{\theta})}$$

where $r = \log(\log(4))/\log(\log(4/3))$. These initial values agree with those suggested in Klugman, Panjer, and Willmot (1998).

A summary of the initial values of all the parameters for all the predefined distributions is given in [Table 23.3](#). The table also provides the names of the parameters to use in the **INIT=** option in the **DIST** statement if you want to provide a different initial value.

Table 23.3 Parameter Initialization for Predefined Distributions

Distribution	Parameter	Name for INIT option	Default Initial Value
BURR	θ	theta	$\sqrt{\frac{m_2 m_3}{2m_3 - 3m_1 m_2}}$
	α	alpha	$1 + \frac{m_3}{2m_3 - 3m_1 m_2}$
	γ	gamma	2
EXP	θ	theta	m_1
GAMMA	θ	theta	m_1/α
	α	alpha	$\frac{3-d+\sqrt{(d-3)^2+24d}}{12d}$
GPD	θ	theta	$m_1 m_2 / (2(m_2 - m_1^2))$
	ξ	xi	$(m_2 - 2m_1^2) / (2(m_2 - m_1^2))$
IGAUSS	θ	theta	m_1
	α	alpha	$m_1^2 / (m_2 - m_1^2)$
LOGN	μ	mu	$2 \log(m_1) - \log(m_2)/2$
	σ	sigma	$\sqrt{\log(m_2) - 2 \log(m_1)}$
PARETO	θ	theta	$m_1 m_2 / (m_2 - 2m_1^2)$
	α	alpha	$2(m_2 - m_1^2) / (m_2 - 2m_1^2)$
TWEEDIE	μ	mu	m_1
	ϕ	phi	$(m_2 - m_1^2) / m_1^p$
	p	p	$(\alpha + 2) / (\alpha + 1)$
			where $\alpha = \frac{3-d+\sqrt{(d-3)^2+24d}}{12d}$
STWEEDIE	θ	theta	$(m_2 - m_1^2)(p - 1) / m_1$
	λ	lambda	$m_1^2 / (\alpha(m_2 - m_1^2)(p - 1))$
	p	p	$(\alpha + 2) / (\alpha + 1)$
			where $\alpha = \frac{3-d+\sqrt{(d-3)^2+24d}}{12d}$
WEIBULL	θ	theta	$\exp\left(\frac{r \log(q1) - \log(q3)}{r-1}\right)$
	τ	tau	$\log(\log(4)) / (\log(q3) - \log(\hat{\theta}))$

Notes:

- m_k denotes the k th raw moment
- $d = \log(m_1) - (\sum \log(y_i))/n$
- $q1$ and $q3$ denote the 25th and 75th percentiles, respectively
- $r = \log(\log(4)) / \log(\log(4/3))$

Censoring and Truncation

One of the key features of PROC SEVERITY is that it enables you to specify whether the severity event's magnitude is observable and if it is observable, then whether the exact value of the magnitude is known. If an event is unobservable when the magnitude is in certain intervals, then it is referred to as a truncation effect. If the exact magnitude of the event is not known, but it is known to have a value in a certain interval, then it is referred to as a censoring effect.

PROC SEVERITY allows a severity event to be subject to any combination of the following four censoring and truncation effects:

- **Left-truncation:** An event is said to be left-truncated if it is observed only when $Y > T^l$, where Y denotes the random variable for the magnitude and T^l denotes a random variable for the truncation threshold. You can specify left-truncation using the **LEFTTRUNCATED=** option in the LOSS statement.
- **Right-truncation:** An event is said to be right-truncated if it is observed only when $Y \leq T^r$, where Y denotes the random variable for the magnitude and T^r denotes a random variable for the truncation threshold. You can specify right-truncation using the **RIGHTTRUNCATED=** option in the LOSS statement.
- **Left-censoring:** An event is said to be left-censored if it is known that the magnitude is $Y \leq C^l$, but the exact value of Y is not known. C^l is a random variable for the censoring limit. You can specify left-censoring using the **LEFTCENSORED=** option in the LOSS statement.
- **Right-censoring:** An event is said to be right-censored if it is known that the magnitude is $Y > C^r$, but the exact value of Y is not known. C^r is a random variable for the censoring limit. You can specify right-censoring using the **RIGHTCENSORED=** option in the LOSS statement.

For each effect, you can specify a different threshold or limit for each observation or specify a single threshold or limit that applies to all the observations.

If all the four types of effects are present on an event, then the following relationship holds: $T^l < C^r \leq C^l \leq T^r$. PROC SEVERITY checks these relationships and write a warning to the SAS log if any is violated.

If the response variable is specified in the LOSS statement, then PROC SEVERITY also checks whether each observation satisfies the definitions of the specified censoring and truncation effects. If left-truncation is specified, then PROC SEVERITY ignores observations where $Y \leq T^l$, because such observations are not observable by definition. Similarly, if right-truncation is specified, then PROC SEVERITY ignores observations where $Y > T^r$. If left-censoring is specified, then PROC SEVERITY treats an observation with $Y > C^l$ as uncensored and ignores the value of C^l . The observations with $Y \leq C^l$ are considered as left-censored, and the value of Y is ignored. If right-censoring is specified, then PROC SEVERITY treats an observation with $Y \leq C^r$ as uncensored and ignores the value of C^r . The observations with $Y > C^r$ are considered as right-censored, and the value of Y is ignored. If both left-censoring and right-censoring are specified, it is referred to as interval-censoring. If $C^r < C^l$ is satisfied for an observation, then it is considered as interval-censored and the value of the response variable is ignored. If $C^r = C^l$ for an observation, then PROC SEVERITY assumes that observation to be uncensored. If all the observations in

a data set are censored in some form, then the specification of the response variable in the LOSS statement is optional, because the actual value of the response variable is not required for the purposes of estimating a model.

Specification of censoring and truncation affects the likelihood of the data (see the section “[Likelihood Function](#)” on page 1563) and how the empirical distribution function (EDF) is estimated (see the section “[Empirical Distribution Function Estimation Methods](#)” on page 1569).

Probability of Observability

For left-truncated data, PROC SEVERITY also enables you to provide additional information in the form of *probability of observability* by using the **PROBOBSERVED=** option. It is defined as the probability that the underlying severity event gets observed (and recorded) for the specified left-truncation threshold value. For example, if you specify a value of 0.75, then for every 75 observations recorded above a specified threshold, 25 more events have happened with a severity value less than or equal to the specified threshold. Although the exact severity value of those 25 events is not known, PROC SEVERITY can use the information about the number of those events.

In particular, for each left-truncated observation, PROC SEVERITY assumes a presence of $(1 - p)/p$ additional observations with $y_i = t_i$. These additional observations are then used for computing the likelihood (see the section “[Probability of Observability and Likelihood](#)” on page 1564) and an unconditional estimate of the empirical distribution function (see the section “[EDF Estimates and Truncation](#)” on page 1573).

Truncation and Conditional CDF Estimates

If left-truncation is specified without the probability of observability or if right-truncation is specified, then the EDF estimates computed by all methods except the STANDARD method are conditional on the truncation information. See the section “[EDF Estimates and Truncation](#)” on page 1573 for more details. In such cases, PROC SEVERITY uses conditional estimates of the CDF whenever they are used for computational or visual comparison with the EDF estimates.

Let $t_{\min}^l = \min_i \{t_i^l\}$ be the smallest value of the left-truncation threshold (t_i^l is the left-truncation threshold for observation i) and $t_{\max}^r = \max_i \{t_i^r\}$ be the largest value of the right-truncation threshold (t_i^r is the right-truncation threshold for observation i). If $\hat{F}(y)$ denotes the unconditional estimate of the CDF at y , then the conditional estimate $\hat{F}^c(y)$ is computed as follows:

- If probability of observability is not specified, then the EDF estimates are conditional on the left-truncation information. If an observation is both left-truncated and right-truncated, then

$$\hat{F}^c(y) = \frac{\hat{F}(y) - \hat{F}(t_{\min}^l)}{\hat{F}(t_{\max}^r) - \hat{F}(t_{\min}^l)}$$

If an observation is left-truncated but not right-truncated, then

$$\hat{F}^c(y) = \frac{\hat{F}(y) - \hat{F}(t_{\min}^l)}{1 - \hat{F}(t_{\min}^l)}$$

If an observation is right-truncated but not left-truncated, then

$$\hat{F}^c(y) = \frac{\hat{F}(y)}{\hat{F}(t_{\max}^r)}$$

- If probability of observability is specified, then EDF estimates are not conditional on the left-truncation information. If an observation is not right-truncated, then the conditional estimate is the same as the unconditional estimate. If an observation is right-truncated, then the conditional estimate is computed as

$$\hat{F}^c(y) = \frac{\hat{F}(y)}{\hat{F}(t_{\max}^r)}$$

If regressors are specified, then $\hat{F}(y)$, $\hat{F}(t_{\min}^l)$, and $\hat{F}(t_{\max}^r)$ are all computed from a mixture distribution, as described in the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569.

Parameter Estimation Method

If you have not specified a custom objective function by specifying programming statements and the **OBJECTIVE=** option in the PROC SEVERITY statement, then PROC SEVERITY uses the maximum likelihood (ML) method to estimate the parameters of each model. A nonlinear optimization process is used to maximize the log of the likelihood function. If you have specified a custom objective function, then PROC SEVERITY uses a nonlinear optimization algorithm to estimate the parameters of each model that minimize the value of your specified objective function. More details are provided in the section “[Custom Objective Functions \(Experimental\)](#)” on page 1596.

Likelihood Function

Let $f_{\Theta}(x)$ and $F_{\Theta}(x)$ denote the PDF and CDF, respectively, evaluated at x for a set of parameter values Θ . Let Y denote the random response variable, and let y denote its value recorded in an observation in the input data set. Let T^l and T^r denote the random variables for the left-truncation and right-truncation threshold, respectively, and let t^l and t^r denote their values for an observation, respectively. If there is no left-truncation, then $t^l = \tau^l$, where τ^l is the smallest value in the support of the distribution; so $F(t^l) = 0$. If there is no right-truncation, then $t^r = \tau_h$, where τ_h is the largest value in the support of the distribution; so $F(t^r) = 1$. Let C^l and C^r denote the random variables for the left-censoring and right-censoring limit, respectively, and let c^l and c^r denote their values for an observation, respectively. If there is no left-censoring, then $c^l = \tau_h$, so $F(c^l) = 1$. If there is no right-censoring, then $c^r = \tau^l$, so $F(c^r) = 0$.

The set of input observations can be categorized into the following four subsets within each BY group:

- E is the set of uncensored and untruncated observations. The likelihood of an observation in E is

$$l_E = \Pr(Y = y) = f_{\Theta}(y)$$

- E_t is the set of uncensored observations that are truncated. The likelihood of an observation in E_t is

$$l_{E_t} = \Pr(Y = y | t^l < Y \leq t^r) = \frac{f_{\Theta}(y)}{F_{\Theta}(t^r) - F_{\Theta}(t^l)}$$

- C is the set of censored observations that are not truncated. The likelihood of an observation C is

$$l_C = \Pr(c^r < Y \leq c^l) = F_{\Theta}(c^l) - F_{\Theta}(c^r)$$

- C_t is the set of censored observations that are truncated. The likelihood of an observation C_t is

$$l_{C_t} = \Pr(c^r < Y \leq c^l | t^l < Y \leq t^r) = \frac{F_{\Theta}(c^l) - F_{\Theta}(c^r)}{F_{\Theta}(t^r) - F_{\Theta}(t^l)}$$

Note that $(E \cup E_t) \cap (C \cup C_t) = \emptyset$. Also, the sets E_t and C_t are empty when no truncation is specified, and the sets C and C_t are empty when no censoring is specified.

Given this, the likelihood of the data L is as follows:

$$L = \prod_E f_{\Theta}(y) \prod_{E_t} \frac{f_{\Theta}(y)}{F_{\Theta}(t^r) - F_{\Theta}(t^l)} \prod_C F_{\Theta}(c^l) - F_{\Theta}(c^r) \prod_{C_t} \frac{F_{\Theta}(c^l) - F_{\Theta}(c^r)}{F_{\Theta}(t^r) - F_{\Theta}(t^l)}$$

The maximum likelihood procedure used by PROC SEVERITY finds an optimal set of parameter values $\hat{\Theta}$ that maximizes $\log(L)$ subject to the boundary constraints on parameter values. For a distribution *dist*, such boundary constraints can be specified by using the *dist_LOWERBOUNDS* and *dist_UPPERBOUNDS* subroutines. See the section “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579 for details. Some aspects of the optimization process can be controlled by using the *NLOPTIONS* statement.

Probability of Observability and Likelihood

If probability of observability is specified for the left-truncation, then PROC SEVERITY uses a modified likelihood function for each truncated observation. If the probability of observability is $p \in (0.0, 1.0]$, then for each left-truncated observation with truncation threshold t^l , there exist $(1 - p)/p$ observations with a response variable value less than or equal to t^l . Each such observation has a probability of $\Pr(Y \leq t^l) = F_{\Theta}(t^l)$. The right-truncation and censoring information does not apply to these added observations. Thus, following the notation of the section “[Likelihood Function](#)” on page 1563, the likelihood of the data is as follows:

$$L = \prod_E f_{\Theta}(y) \prod_{E_t, t^l = \tau^l} \frac{f_{\Theta}(y)}{F_{\Theta}(t^r)} \prod_{E_t, t^l > \tau^l} \frac{f_{\Theta}(y)}{F_{\Theta}(t^r)} F_{\Theta}(t^l)^{\frac{1-p}{p}} \\ \prod_C F_{\Theta}(c^l) - F_{\Theta}(c^r) \prod_{C_t, t^l = \tau^l} \frac{F_{\Theta}(c^l) - F_{\Theta}(c^r)}{F_{\Theta}(t^r)} \prod_{C_t, t^l > \tau^l} \frac{F_{\Theta}(c^l) - F_{\Theta}(c^r)}{F_{\Theta}(t^r)} F_{\Theta}(t^l)^{\frac{1-p}{p}}$$

Note that the likelihood of the observations that are not left-truncated (observations in sets E and C , and observations in sets E_t and C_t for which $t^l = \tau^l$) is not affected.

If you have specified a custom objective function, then PROC SEVERITY accounts for the probability of observability only while computing the empirical distribution function estimate. The parameter estimates are affected only by your custom objective function.

Estimating Covariance and Standard Errors

PROC SEVERITY computes an estimate of the covariance matrix of the parameters by using the asymptotic theory of the maximum likelihood estimators (MLE). If N denotes the number of observations used for estimating a parameter vector θ , then the theory states that as $N \rightarrow \infty$, the distribution of $\hat{\theta}$, the estimate of θ , converges to a normal distribution with mean θ and covariance \hat{C} such that $\mathbf{I}(\theta) \cdot \hat{C} \rightarrow 1$, where $\mathbf{I}(\theta) = -E[\nabla^2 \log(L(\theta))]$ is the information matrix for the likelihood of the data, $L(\theta)$. The covariance estimate is obtained by using the inverse of the information matrix.

In particular, if $\mathbf{G} = \nabla^2 \log(L(\theta))$ denotes the Hessian matrix of the log likelihood, then the covariance estimate is computed as

$$\hat{C} = \frac{N}{d} \mathbf{G}^{-1}$$

where d is a denominator determined by the **VARDEF=** option. If **VARDEF=N**, then $d = N$, which yields the asymptotic covariance estimate. If **VARDEF=DF**, then $d = N - k$, where k is number of parameters (the model's degrees of freedom). The **VARDEF=DF** option is the default, because it attempts to correct the potential bias introduced by the finite sample.

The standard error s_i of the parameter θ_i is computed as the square root of the i th diagonal element of the estimated covariance matrix; that is, $s_i = \sqrt{\hat{C}_{ii}}$.

If you have specified a custom objective function, then the covariance matrix of the parameters is still computed by inverting the information matrix, except that the Hessian matrix \mathbf{G} is computed as $\mathbf{G} = \nabla^2 \log(U(\theta))$, where U denotes your custom objective function.

Covariance and standard error estimates might not be available if the Hessian matrix is found to be singular at the end of the optimization process. This can especially happen if the optimization process stops without converging.

Parameter Initialization

PROC SEVERITY enables you to initialize parameters of a model in different ways. There can be two kinds of parameters in a model: distribution parameters and regression parameters.

The distribution parameters can be initialized by using one of the following three methods:

INIT= option	You can use the INIT= option in the DIST statement.
INEST= data set	You can use the INEST= data set.

PARMINIT subroutine You can define a *dist_PARMINIT* subroutine in the distribution model. See the section “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579 for details.

Note that only one of the initialization methods is used. You cannot combine them. They are used in the following order:

- The method that uses the INIT= option takes the highest precedence. If you use the INIT= option to provide an initial value for at least one parameter, then other initialization methods (INEST= and PARMINIT) are not used. If you specify initial values for some but not all the parameters by using the INIT= option, then the uninitialized parameters are initialized to the default value of 0.001.
If this option is used when regression effects are specified, then the value of the first distribution parameter must be related to the initial value for the *base* value of the scale or log-transformed scale parameter. See the section “[Estimating Regression Effects](#)” on page 1566 for details.
- The method that uses the INEST= data set takes the second precedence. If there is a nonmissing value specified for even one distribution parameter, then the PARMINIT method is not used and any uninitialized parameters are initialized to the default value of 0.001.
- If none of the distribution parameters are initialized by using the INIT= option or the INEST= data set, but the distribution model defines a PARMINIT subroutine, then PROC SEVERITY invokes that subroutine with appropriate inputs to initialize the parameters. If the PARMINIT subroutine returns missing values for some parameters, then those parameters are initialized to the default value of 0.001.
- If none of the initialization methods are used, each distribution parameter is initialized to the default value of 0.001.

See the section “[Estimating Regression Effects](#)” on page 1566 for details on regression models and initialization of regression parameters.

Estimating Regression Effects

The SEVERITY procedure enables you to estimate the effects of regressor (exogenous) variables while fitting a distribution if the distribution has a scale parameter or a log-transformed scale parameter.

Let x_j ($j = 1, \dots, k$) denote the k regressor variables. Let β_j denote the regression parameter that corresponds to the regressor x_j . If regression effects are not specified, then the model for the response variable Y is of the form

$$Y \sim \mathcal{F}(\Theta)$$

where \mathcal{F} is the distribution of Y with parameters Θ . This model is typically referred to as the error model. The regression effects are modeled by extending the error model to the following form:

$$Y \sim \exp\left(\sum_{j=1}^k \beta_j x_j\right) \cdot \mathcal{F}(\Theta)$$

Under this model, the distribution of Y is valid and belongs to the same parametric family as \mathcal{F} if and only if \mathcal{F} has a scale parameter. Let θ denote the scale parameter and Ω denote the set of nonscale distribution parameters of \mathcal{F} . Then the model can be rewritten as

$$Y \sim \mathcal{F}(\theta, \Omega)$$

such that θ is affected by the regressors as

$$\theta = \theta_0 \cdot \exp\left(\sum_{j=1}^k \beta_j x_j\right)$$

where θ_0 is the *base* value of the scale parameter. Thus, the regression model consists of the following parameters: θ_0 , Ω , and β_j ($j = 1, \dots, k$).

Given this form of the model, distributions without a scale parameter cannot be considered when regression effects are to be modeled. If a distribution does not have a direct scale parameter, then PROC SEVERITY accepts it only if it has a log-transformed scale parameter — that is, if it has a parameter $p = \log(\theta)$.

Parameter Initialization for Regression Models

The regression parameters are initialized either by using the values you specify or by the default method.

- If you provide initial values for the regression parameters, then you must provide valid, nonmissing initial values for θ_0 and β_j parameters for all j .

You can specify the initial value for θ_0 using either the INEST= data set or the INIT= option in the DIST statement. If the distribution has a direct scale parameter (no transformation), then the initial value for the first parameter of the distribution is used as an initial value for θ_0 . If the distribution has a log-transformed scale parameter, then the initial value for the first parameter of the distribution is used as an initial value for $\log(\theta_0)$.

You can use only the INEST= data set to specify the initial values for β_j . The INEST= data set must contain nonmissing initial values for all the regressors specified in the SCALEMODEL statement. The only missing value allowed is the special missing value .R, which indicates that the regressor is linearly dependent on other regressors. If you specify .R for a regressor for one distribution in a BY group, you must specify it so for all the distributions in that BY group.

- If you do not specify valid initial values for θ_0 or β_j parameters for all j , then PROC SEVERITY initializes those parameters using the following method:

Let a random variable Y be distributed as $\mathcal{F}(\theta, \Omega)$, where θ is the scale parameter. By definition of the scale parameter, a random variable $W = Y/\theta$ is distributed as $\mathcal{G}(\Omega)$ such that $\mathcal{G}(\Omega) = \mathcal{F}(1, \Omega)$. Given a random error term e that is generated from a distribution $\mathcal{G}(\Omega)$, a value y from the distribution of Y can be generated as

$$y = \theta \cdot e$$

Taking the logarithm of both sides and using the relationship of θ with the regressors yields:

$$\log(y) = \log(\theta_0) + \sum_{j=1}^k \beta_j x_j + \log(e)$$

PROC SEVERITY makes use of the preceding relationship to initialize parameters of a regression model with distribution *dist* as follows:

1. The following linear regression problem is solved to obtain initial estimates of β_0 and β_j :

$$\log(y) = \beta_0 + \sum_{j=1}^k \beta_j x_j$$

The estimates of β_j ($j = 1, \dots, k$) in the solution of this regression problem are used to initialize the respective regression parameters of the model. The estimate of β_0 is later used to initialize the value of θ_0 .

The results of this regression are also used to detect whether any regressors are linearly dependent on the other regressors. If any such regressors are found, then a warning is written to the SAS log and the corresponding regressor is eliminated from further analysis. The estimates for linearly dependent regressors are denoted by a special missing value of .R in the OUTEST= data set and in any displayed output.

2. Let s_0 denote the initial value of the scale parameter.

If the distribution model of *dist* does not contain the *dist_PARMINIT* subroutine, then s_0 and all the nonscale distribution parameters are initialized to the default value of 0.001.

However, it is strongly recommended that each distribution's model contain the *dist_PARMINIT* subroutine. See the section “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579 for more details. If that subroutine is defined, then s_0 is initialized as follows:

Each input value y_i of the response variable is transformed to its scale-normalized version w_i as

$$w_i = \frac{y_i}{\exp(\beta_0 + \sum_{j=1}^k \beta_j x_{ij})}$$

where x_{ij} denotes the value of j th regressor in the i th input observation. These w_i values are used to compute the input arguments for the *dist_PARMINIT* subroutine. The values that are computed by the subroutine for nonscale parameters are used as their respective initial values. If the distribution has an untransformed scale parameter, then s_0 is set to the value of the scale parameter that is computed by the subroutine. If the distribution has a log-transformed scale parameter P , then s_0 is computed as $s_0 = \exp(l_0)$, where l_0 is the value of P computed by the subroutine.

3. The value of θ_0 is initialized as

$$\theta_0 = s_0 \cdot \exp(\beta_0)$$

Reporting Estimates of Regression Parameters

When you request estimates to be written to the output (either ODS displayed output or in the OUTEST= data set), the estimate of the base value of the first distribution parameter is reported. If the first parameter is the log-transformed scale parameter, then the estimate of $\log(\theta_0)$ is reported; otherwise, the estimate of θ_0 is reported. The transform of the first parameter of a distribution *dist* is controlled by the *dist_SCALETRANSFORM* function that is defined for it.

CDF and PDF Estimates with Regression Effects

When regression effects are estimated, the estimate of the scale parameter depends on the values of the regressors and estimates of the regression parameters. This results in a potentially different distribution for each observation. In order to make estimates of the cumulative distribution function (CDF) and probability density function (PDF) comparable across distributions and comparable to the empirical distribution function (EDF), PROC SEVERITY reports the CDF and PDF estimates from a mixture distribution. This mixture distribution is an equally weighted mixture of N distributions, where N is the number of observations used for estimation. Each component of the mixture differs only in the value of the scale parameter.

In particular, let $f(y; \hat{\theta}_i, \hat{\Omega})$ and $F(y; \hat{\theta}_i, \hat{\Omega})$ denote the PDF and CDF, respectively, of the component distribution due to observation i , where y denotes the value of the response variable, $\hat{\theta}_i$ denotes the estimate of the scale parameter due to observation i , and $\hat{\Omega}$ denotes the set of estimates of all other parameters of the distribution. The value of θ_i is computed as

$$\hat{\theta}_i = \hat{\theta}_0 \cdot \exp\left(\sum_{j=1}^k \hat{\beta}_j x_{ij}\right)$$

where $\hat{\theta}_0$ is an estimate of the base value of the scale parameter, $\hat{\beta}_j$ are the estimates of regression coefficients, and x_{ij} is the value of regressor j in observation i . Then, the PDF and CDF estimates, $f^*(y)$ and $F^*(y)$, respectively, of the mixture distribution at y are computed as follows:

$$f^*(y) = \frac{1}{W} \sum_{i=1}^N w_i f(y; \hat{\theta}_i, \hat{\Omega})$$

$$F^*(y) = \frac{1}{W} \sum_{i=1}^N w_i F(y; \hat{\theta}_i, \hat{\Omega})$$

where w_i denotes the weight of observation i and W is the total weight ($W = \sum_{i=1}^N w_i$). If the WEIGHT statement is specified, then the weight is equal to the value of the specified weight variable; otherwise, the weight is equal to 1.

The CDF estimates reported in OUTCDF= data set and plotted in CDF plots are the $F^*(y)$ values. The PDF estimates plotted in PDF plots are the $f^*(y)$ values.

If truncation is specified, then the conditional CDF estimates are computed by using the $F^*(y)$ value along with the minimum and maximum truncation limits as described in the section “[Truncation and Conditional CDF Estimates](#)” on page 1562.

Empirical Distribution Function Estimation Methods

The empirical distribution function (EDF) is a nonparametric estimate of the cumulative distribution function (CDF) of the distribution. PROC SEVERITY uses EDF estimates for computing the EDF-based statistics of fit.

If you specify both right-censoring and left-censoring, then the EDF is estimated using Turnbull’s method as described in the section “[EDF Estimation for Right-Censored and Left-Censored Data \(Experimental\)](#)”

on page 1572. If all the observations are uncensored or there is only one type of censoring, then a choice of methods is available as described in the section “EDF Estimation for No Censoring or Single Type of Censoring” on page 1570.

Notation

Let there be a set of N observations, each containing a quintuplet of values $(y_i, t_i^l, t_i^r, c_i^l, c_i^r)$, $i = 1, \dots, N$, where y_i is the value of the response variable, t_i^l is the value of the left-truncation threshold, t_i^r is the value of the right-truncation threshold, c_i^l is the value of the left-censoring limit, and c_i^r is the value of the right-censoring limit.

If an observation is not left-truncated, then $t_i^l = \tau^l$, where τ^l is the smallest value in the support of the distribution; so $F(t_i^l) = 0$. If an observation is not right-truncated, then $t_i^r = \tau_h$, where τ_h is the largest value in the support of the distribution; so $F(t_i^r) = 1$. If an observation is not left-censored, then $c_i^l = \tau_h$; so $F(c_i^l) = 1$. If an observation is not right-censored, then $c_i^r = \tau^l$; so $F(c_i^r) = 0$.

An indicator function $I[e]$ takes a value of 1 or 0 if the expression e is true or false, respectively.

EDF Estimation for No Censoring or Single Type of Censoring

These methods are described in detail assuming that all observations either uncensored or right-censored; that is, each observation is of the form $(y_i, t_i^l, t_i^r, \tau_h, c_i^r)$.

If all observations are either uncensored or left-censored, then each observation is of the form $(y_i, t_i^l, t_i^r, c_i^l, \tau_l)$. It is converted to an observation $(-y_i, -t_i^r, -t_i^l, \tau_h, -c_i^l)$; that is, the signs of all the response variable values are reversed, the new left-truncation threshold is equal to the negative of the original right-truncation threshold, the new right-truncation threshold is equal to the negative of the original left-truncation threshold, and the negative of the original left-censoring limit becomes the new right-censoring limit. With this transformation, each observation is either uncensored or right-censored. The methods described for handling uncensored or right-censored data are now applicable. After the EDF estimates are computed, the observations are transformed back to the original form and EDF estimates are adjusted such $F_n(y_i) = 1 - F_n(-y_i-)$, where $F_n(-y_i-)$ denotes the EDF estimate of the value slightly less than the transformed value $-y_i$.

A set of uncensored or right-censored observations can be converted to a set of observations of the form $(y_i, t_i^l, t_i^r, \delta_i)$, where δ_i is the indicator of right-censoring. $\delta_i = 0$ indicates a right-censored observation, in which case y_i is assumed to record the right-censoring limit c_i^r . $\delta_i = 1$ indicates an uncensored observation, and y_i records the exact observed value. In other words, $\delta_i = I[Y \leq C^r]$ and $y_i = \min(y_i, c_i^r)$.

Given this notation, the EDF is estimated as

$$F_n(y) = \begin{cases} 0 & \text{if } y < y^{(1)} \\ \hat{F}_n(y^{(k)}) & \text{if } y^{(k)} \leq y < y^{(k+1)}, k = 1, \dots, N-1 \\ \hat{F}_n(y^{(N)}) & \text{if } y^{(N)} \leq y \end{cases}$$

where $y^{(k)}$ denotes the k th order statistic of the set $\{y_i\}$ and $\hat{F}_n(y^{(k)})$ is the estimate computed at that value. The definition of \hat{F}_n depends on the estimation method. You can specify a particular method or

let PROC SEVERITY choose an appropriate method by using the `EMPIRICALCDF=` option in the PROC SEVERITY statement. Each method computes \hat{F}_n as follows:

STANDARD This method is the standard way of computing EDF. The EDF estimate at observation i is computed as follows:

$$\hat{F}_n(y_i) = \frac{1}{N} \sum_{j=1}^N I[y_j \leq y_i]$$

This method ignores any censoring and truncation information, even if it is specified. When no censoring or truncation information is specified, this is the default method chosen.

KAPLANMEIER The Kaplan-Meier (KM) estimator, also known as the product-limit estimator, was first introduced by Kaplan and Meier (1958) for censored data. Lynden-Bell (1971) derived a similar estimator for left-truncated data. PROC SEVERITY uses the definition that combines both censoring and truncation information (Klein and Moeschberger 1997, Lai and Ying 1991).

The EDF estimate at observation i is computed as

$$\hat{F}_n(y_i) = 1 - \prod_{\tau \leq y_i} \left(1 - \frac{n_\tau}{R_n(\tau)}\right)$$

where n_τ and $R_n(\tau)$ are defined as follows:

- $n_\tau = \sum_{k=1}^N I[y_k = \tau \text{ and } \tau \leq t_k^r \text{ and } \delta_k = 1]$, which is the number of uncensored observations ($\delta_k = 1$) for which the response variable value is equal to τ and τ is observable according to the right-truncation threshold of that observation ($\tau \leq t_k^r$).
- $R_n(\tau) = \sum_{k=1}^N I[y_k \geq \tau > t_k^l]$, which is the size (cardinality) of the risk set at τ . The term *risk set* has its origins in survival analysis; it contains the events that are at risk of failure at a given time, τ . In other words, it contains the events that have survived up to time τ and might fail at or after τ . For PROC SEVERITY, *time* is equivalent to the magnitude of the event and *failure* is equivalent to an uncensored and observable event, where observable means it satisfies the truncation thresholds.

If you do not explicitly specify a method of computing EDF, then this is the default method used if you specify either right-censoring or left-censoring, but not both. This is also the default method when you specify truncation without any censoring.

MODIFIEDKM The product-limit estimator used by the KAPLANMEIER method does not work well if the risk set size becomes very small. For right-censored data, the size can become small towards the right tail. For left-truncated data, the size can become small at the left tail and can remain so for the entire range of data. This was demonstrated by Lai and Ying (1991). They proposed a modification to the estimator that ignores the effects due to small risk set sizes.

The EDF estimate at observation i is computed as

$$\hat{F}_n(y_i) = 1 - \prod_{\tau \leq y_i} \left(1 - \frac{n_\tau}{R_n(\tau)} \cdot I[R_n(\tau) \geq cN^\alpha]\right)$$

where the definitions of n_τ and $R_n(\tau)$ are identical to those used for the KAPLAN-MEIER method described previously.

You can specify the values of c and α by using the **C=** and **ALPHA=** options. If you do not specify a value for c , the default value used is $c = 1$. If you do not specify a value for α , the default value used is $\alpha = 0.5$.

As an alternative, you can also specify an absolute lower bound, say L , on the risk set size by using the **RSLB=** option, in which case $I[R_n(\tau) \geq cN^\alpha]$ is replaced by $I[R_n(\tau) \geq L]$ in the definition.

EDF Estimation for Right-Censored and Left-Censored Data (Experimental)

If the response variable is subject to both left-censoring and right-censoring effects, then the SEVERITY procedure uses a method proposed by Turnbull (1976) to compute the nonparametric estimates of the cumulative distribution function. The original Turnbull's method is modified using the suggestions made by Frydman (1994) when truncation effects are present.

Let the input data consist of N observations in the form of quintuplets of values $(y_i, t_i^l, t_i^r, c_i^l, c_i^r), i = 1, \dots, N$ with notation described in the section “Notation” on page 1570. For each observation, let $A_i = (c_i^r, c_i^l]$ be the censoring interval; that is, the response variable value is known to lie in the interval A_i , but the exact value is not known. If an observation is uncensored, then $A_i = (y_i - \epsilon, y_i]$ for any arbitrarily small value of $\epsilon > 0$. If an observation is censored, then the value y_i is ignored. Similarly, for each observation, let $B_i = (t_i^l, t_i^r]$ be the truncation interval; that is, the observation is drawn from a truncated (conditional) distribution $F(y, B_i) = P(Y \leq y | Y \in B_i)$.

Two sets, L and R , are formed using A_i and B_i as follows:

$$\begin{aligned} L &= \{c_i^r, 1 \leq i \leq N\} \cup \{t_i^r, 1 \leq i \leq N\} \\ R &= \{c_i^l, 1 \leq i \leq N\} \cup \{t_i^l, 1 \leq i \leq N\} \end{aligned}$$

The sets L and R represent the left endpoints and right endpoints, respectively. A set of disjoint intervals $C_j = [q_j, p_j], 1 \leq j \leq M$ is formed such that $q_j \in L$ and $p_j \in R$ and $q_j \leq p_j$ and $p_j < q_{j+1}$. The value of M is dependent on the nature of censoring and truncation intervals in the input data. Turnbull (1976) showed that the maximum likelihood estimate (MLE) of the EDF can increase only inside intervals C_j . In other words, the MLE estimate is constant in the interval (p_j, q_{j+1}) . The likelihood is independent of the behavior of F_n inside any of the intervals C_j . Let s_j denote the increase in F_n inside an interval C_j . Then, the EDF estimate is as follows:

$$F_n(y) = \begin{cases} 0 & \text{if } y < q_1 \\ \sum_{k=1}^j s_k & \text{if } p_j < y < q_{j+1}, 1 \leq j \leq M-1 \\ 1 & \text{if } y > p_M \end{cases}$$

PROC SEVERITY reports the estimates $F_n(p_j+) = F_n(q_{j+1}-) = \sum_{k=1}^j s_k$ at points p_j and q_{j+1} and reports $F_n(q_1-) = 0$ at point q_1 , where $F_n(x+)$ denotes the limiting estimate at a point that is infinitesimally larger than x when approaching x from values larger than x and where $F_n(x-)$ denotes the limiting estimate at a point that is infinitesimally smaller than x when approaching x from values smaller than x .

PROC SEVERITY uses the expectation-maximization (EM) algorithm proposed by Turnbull (1976), who referred to the algorithm as the self-consistency algorithm. By default, the algorithm runs until one of the following criteria is met:

- **Relative-error criterion:** The maximum relative error between the two consecutive estimates of s_j falls below a threshold ϵ . If l indicates an index of the current iteration, then this can be formally stated as

$$\arg \max_{1 \leq j \leq M} \left\{ \frac{|s_j^l - s_j^{l-1}|}{s_j^{l-1}} \right\} \leq \epsilon$$

You can control the value of ϵ by specifying the **EPS=** suboption of the **EDF=TURNBULL** option in the PROC SEVERITY statement. The default value is 1.0E-8.

- **Maximum-iteration criterion:** The number of iterations exceeds an upper limit specified by the **MAX-ITER=** suboption of the **EDF=TURNBULL** option in the PROC SEVERITY statement. The default number of maximum iterations is 500.

The self-consistent estimates obtained in this manner might not be maximum likelihood estimates. Gentleman and Geyer (1994) suggested the use of the Kuhn-Tucker conditions for the maximum likelihood problem to ensure that the estimates are MLE. If you specify the **ENSUREMLE** suboption of the **EDF=TURNBULL** option in the PROC SEVERITY statement, then PROC SEVERITY computes the Kuhn-Tucker conditions at the end of each iteration to determine whether the estimates $\{s_j\}$ are MLE. If no truncation effects are specified, then the Kuhn-Tucker conditions derived by Gentleman and Geyer (1994) are used. If truncation effects are specified, then PROC SEVERITY uses modified Kuhn-Tucker conditions that account for the truncation effects. An integral part of checking the conditions is to determine whether an estimate s_j is zero or whether an estimate of the Lagrange multiplier or the reduced gradient associated with the estimate s_j is zero. PROC SEVERITY declares these values to be zero if they are less than or equal to a threshold δ . You can control the value of δ by specifying the **ZEROPROB=** suboption of the **EDF=TURNBULL** option in the PROC SEVERITY statement. The default value is 1.0E-8. The algorithm continues until the Kuhn-Tucker conditions are satisfied or the number of iterations exceeds the upper limit. The relative-error criterion stated previously is not used when the **ENSUREMLE** option is specified.

EDF Estimates and Truncation

If truncation is specified, then the estimate $\hat{F}_n(y)$ computed by any method other than the **STANDARD** method is a *conditional* estimate. In other words, $\hat{F}_n(y) = \Pr(Y \leq y | \tau_G < Y \leq \tau_H)$, where G and H denote the (unknown) distribution functions of the left-truncation threshold variable T^l and the right-truncation threshold variable T^r , respectively, τ_G denotes the smallest left-truncation threshold with a nonzero cumulative probability, and τ_H denotes the largest right-truncation threshold with a nonzero cumulative probability. Formally, $\tau_G = \inf\{s : G(s) > 0\}$ and $\tau_H = \sup\{s : H(s) > 0\}$. For computational purposes, PROC SEVERITY estimates τ_G and τ_H by t_{\min}^l and t_{\max}^r , respectively, defined as

$$t_{\min}^l = \min\{t_k^l : 1 \leq k \leq N\}$$

$$t_{\max}^r = \max\{t_k^r : 1 \leq k \leq N\}$$

These estimates are used to compute conditional estimates of the CDF as described in the section “**Truncation and Conditional CDF Estimates**” on page 1562.

If left-truncation is specified *with* the probability of observability p , then PROC SEVERITY uses the additional information provided by p to compute an estimate of the EDF that is not conditional on the left-truncation information. In particular, for each left-truncated observation i with response variable value y_i and truncation threshold t_i^l , an observation j is added with *weight* $w_j = (1 - p)/p$ and $y_j = t_i^l$. Each added observation is assumed to be uncensored and untruncated. Weight on each original observation i is assumed to be 1; that is, $w_i = 1$. Then, the specified EDF method is used by assuming no left-truncation. The EDF estimate that is obtained using this method is not conditional on the left-truncation information. For the KAPLANMEIER and MODIFIEDKM methods with uncensored or right-censored data, definitions of n_τ and $R_n(\tau)$ are modified to account for the weights on the observations. If N^a denotes the total number of observations including the added observations, then n_τ is defined as $n_\tau = \sum_{k=1}^{N^a} w_k I[y_k = \tau \text{ and } \tau \leq t_k^r \text{ and } \delta_k = 1]$, and $R_n(\tau)$ is defined as $R_n(\tau) = \sum_{k=1}^{N^a} w_k I[y_k \geq \tau]$. In the definition of $R_n(\tau)$, the left-truncation information is not used, because it was used along with p to add the observations. If the original data are a combination of left- and right-censored data, then Turnbull's method is applied to the appended set that contains no left-truncated observations.

Supplying EDF Estimates to Functions and Subroutines

The parameter initialization subroutines in distribution models and some predefined utility functions require EDF estimates. See the sections “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579 and “[Predefined Utility Functions](#)” on page 1591 for details.

PROC SEVERITY supplies the EDF estimates to these subroutines and functions by using two arrays, x and F , the dimension of each array, and a type of the EDF estimates. The type identifies how the EDF estimates are computed and stored. They are as follows:

- Type 1 specifies that EDF estimates are computed using the STANDARD method; that is, the data used for estimation are neither censored nor truncated.
- Type 2 specifies that EDF estimates are computed using either the KAPLANMEIER or the MODIFIEDKM method; that is, the data used for estimation are subject to truncation and one type of censoring (left or right, but not both).
- Type 3 specifies that EDF estimates are computed using the TURNBULL method; that is, the data used for estimation are subject to both left- and right-censoring. The data might or might not be truncated.

For Types 1 and 2, the EDF estimates are stored in arrays x and F of dimension N such that the following holds:

$$F_n(y) = \begin{cases} 0 & \text{if } y < x[1] \\ F[k] & \text{if } x[k] \leq y < x[k+1], k = 1, \dots, N-1 \\ F[N] & \text{if } x[N] \leq y \end{cases}$$

where $[k]$ denotes k th element of the array ($[1]$ denotes the first element of the array).

For Type 3, the EDF estimates are stored in arrays x and F of dimension N such that the following holds:

$$F_n(y) = \begin{cases} 0 & \text{if } y < x[1] \\ \text{undefined} & \text{if } x[2k-1] \leq y < x[2k], k = 1, \dots, (N-1)/2 \\ F[2k] = F[2k+1] & \text{if } x[2k] \leq y < x[2k+1], k = 1, \dots, (N-1)/2 \\ F[N] & \text{if } x[N] \leq y \end{cases}$$

Although the behavior of EDF is theoretically undefined for the interval $[x[2k-1], x[2k]]$, for computational purposes, all predefined functions and subroutines assume that the EDF increases linearly from $F[2k-1]$ to $F[2k]$ in that interval if $x[2k-1] < x[2k]$. If $x[2k-1] = x[2k]$, which can happen when the EDF is estimated from a combination of uncensored and interval-censored data, the predefined functions and subroutines assume that $F_n(x[2k-1]) = F_n(x[2k]) = F[2k]$.

Statistics of Fit

PROC SEVERITY computes and reports various statistics of fit to indicate how well the estimated model fits the data. The statistics belong to two categories: likelihood-based statistics and EDF-based statistics. Statistics Neg2LogLike, AIC, AICC, and BIC are likelihood-based statistics, and statistics KS, AD, and CvM are EDF-based statistics. The following subsections provide definitions of each.

Likelihood-Based Statistics

Let $y_i, i = 1, \dots, N$ denote the response variable values. Let L be the likelihood as defined in the section “Likelihood Function” on page 1563. Let p denote the number of model parameters estimated. Note that $p = p_d + (k - k_r)$, where p_d is the number of distribution parameters, k is the number of regressors, if any, specified in the SCALEMODEL statement, and k_r is the number of regressors found to be linearly dependent (redundant) on other regressors. Given this notation, the likelihood-based statistics are defined as follows:

Neg2LogLike The log likelihood is reported as

$$\text{Neg2LogLike} = -2 \log(L)$$

The multiplying factor -2 makes it easy to compare it to the other likelihood-based statistics. A model with a smaller value of Neg2LogLike is deemed better.

AIC The Akaike’s information criterion (AIC) is defined as

$$\text{AIC} = -2 \log(L) + 2p$$

A model with a smaller value of AIC is deemed better.

AICC The corrected Akaike’s information criterion (AICC) is defined as

$$\text{AICC} = -2 \log(L) + \frac{2Np}{N - p - 1}$$

A model with a smaller value of AICC is deemed better. It corrects the finite-sample bias that AIC has when N is small compared to p . AICC is related to AIC as

$$\text{AICC} = \text{AIC} + \frac{2p(p+1)}{N - p - 1}$$

As N becomes large compared to p , AICC converges to AIC. AICC is usually recommended over AIC as a model selection criterion.

BIC The Schwarz Bayesian information criterion (BIC) is defined as

$$\text{BIC} = -2 \log(L) + p \log(N)$$

A model with a smaller value of BIC is deemed better.

EDF-Based Statistics

This class of statistics is based on the difference between the estimate of the cumulative distribution function (CDF) and the estimate of the empirical distribution function (EDF). Let $y_i, i = 1, \dots, N$ denote the sample of N values of the response variable. Let $r_i = \sum_{j=1}^N I[y_j \leq y_i]$ denote the number of observations with a value less than or equal to y_i , where I is an indicator function. Let $F_n(y_i)$ denote the EDF estimate that is computed by using the method specified in the [EMPIRICALCDF=](#) option. Let $Z_i = \hat{F}(y_i)$ denote the estimate of the CDF. Let $F_n(Z_i)$ denote the EDF estimate of Z_i values that are computed using the same method that is used to compute the EDF of y_i values. Using the probability integral transformation, if $F(y)$ is the true distribution of the random variable Y , then the random variable $Z = F(y)$ is uniformly distributed between 0 and 1 (D'Agostino and Stephens 1986, Ch. 4). Thus, comparing $F_n(y_i)$ with $\hat{F}(y_i)$ is equivalent to comparing $F_n(Z_i)$ with $\hat{F}(Z_i) = Z_i$ (uniform distribution).

Note the following two points regarding which CDF estimates are used for computing the test statistics:

- If regressor variables are specified, then the CDF estimates Z_i used for computing the EDF test statistics are from a mixture distribution. See the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569 for details.
- If the EDF estimates are conditional because of the truncation information, then each unconditional estimate Z_i is converted to a conditional estimate using the method described in the section “[Truncation and Conditional CDF Estimates](#)” on page 1562.

In the following, it is assumed that Z_i denotes an appropriate estimate of the CDF if truncation or regression effects are specified. Given this, the EDF-based statistics of fit are defined as follows:

KS The Kolmogorov-Smirnov (KS) statistic computes the largest vertical distance between the CDF and the EDF. It is formally defined as follows:

$$\text{KS} = \sup_y |F_n(y) - F(y)|$$

If the STANDARD method is used to compute the EDF, then the following formula is used:

$$\begin{aligned} D^+ &= \max_i \left(\frac{r_i}{N} - Z_i \right) \\ D^- &= \max_i \left(Z_i - \frac{r_{i-1}}{N} \right) \\ \text{KS} &= \sqrt{N} \max(D^+, D^-) + \frac{0.19}{\sqrt{N}} \end{aligned}$$

Note that r_0 is assumed to be 0.

If the method used to compute the EDF is any method other than the STANDARD method, then the following formula is used:

$$\begin{aligned} D^+ &= \max_i (F_n(Z_i) - Z_i), \text{ if } F_n(Z_i) \geq Z_i \\ D^- &= \max_i (Z_i - F_n(Z_i)), \text{ if } F_n(Z_i) < Z_i \\ \text{KS} &= \sqrt{N} \max(D^+, D^-) + \frac{0.19}{\sqrt{N}} \end{aligned}$$

AD The Anderson-Darling (AD) statistic is a quadratic EDF statistic that is proportional to the expected value of the weighted squared difference between the EDF and CDF. It is formally defined as follows:

$$\text{AD} = N \int_{-\infty}^{\infty} \frac{(F_n(y) - F(y))^2}{F(y)(1 - F(y))} dF(y)$$

If the STANDARD method is used to compute the EDF, then the following formula is used:

$$\text{AD} = -N - \frac{1}{N} \sum_{i=1}^N [(2r_i - 1) \log(Z_i) + (2N + 1 - 2r_i) \log(1 - Z_i)]$$

If the method used to compute the EDF is any method other than the STANDARD method, then the statistic can be computed by using the following two pieces of information:

- If the EDF estimates are computed using the KAPLANMEIER or MODIFIEDKM methods, then EDF is a step function such that the estimate $F_n(z)$ is a constant equal to $F_n(Z_{i-1})$ in interval $[Z_{i-1}, Z_i]$. If the EDF estimates are computed using the TURNBULL method, then there are two types of intervals: one in which the EDF curve is constant and the other in which the EDF curve is theoretically undefined. For computational purposes, it is assumed that the EDF curve is linear for the latter type of the interval. For each method, the EDF estimate $F_n(y)$ at y can be written as

$$F_n(z) = F_n(Z_{i-1}) + S_i(z - Z_{i-1}), \text{ for } z \in [Z_{i-1}, Z_i]$$

where S_i is the slope of the line defined as

$$S_i = \frac{F_n(Z_i) - F_n(Z_{i-1})}{Z_i - Z_{i-1}}$$

For the KAPLANMEIER or MODIFIEDKM method, $S_i = 0$ in each interval.

- Using the probability integral transform $z = F(y)$, the formula simplifies to

$$\text{AD} = N \int_{-\infty}^{\infty} \frac{(F_n(z) - z)^2}{z(1 - z)} dz$$

The computation formula can then be derived from the following approximation:

$$\begin{aligned} \text{AD} &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} \frac{(F_n(z) - z)^2}{z(1 - z)} dz \\ &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} \frac{(F_n(Z_{i-1}) + S_i(z - Z_{i-1}) - z)^2}{z(1 - z)} dz \\ &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} \frac{(P_i - Q_i z)^2}{z(1 - z)} dz \end{aligned}$$

where $P_i = F_n(Z_{i-1}) - S_i Z_{i-1}$, $Q_i = 1 - S_i$, and K is the number of points at which the EDF estimate are computed. For the TURNBULL method, $K = 2k$ for some k .

Assuming $Z_0 = 0$, $Z_{K+1} = 1$, $F_n(0) = 0$, and $F_n(Z_K) = 1$ yields the following computation formula:

$$\begin{aligned} \text{AD} = & -N(Z_1 + \log(1 - Z_1) + \log(Z_K) + (1 - Z_K)) \\ & + N \sum_{i=2}^K [P_i^2 A_i - (Q_i - P_i)^2 B_i - Q_i^2 C_i] \end{aligned}$$

where $A_i = \log(Z_i) - \log(Z_{i-1})$, $B_i = \log(1 - Z_i) - \log(1 - Z_{i-1})$, and $C_i = Z_i - Z_{i-1}$.

If EDF estimates are computed using the KAPLANMEIER or MODIFIEDKM method, then $P_i = F_n(Z_{i-1})$ and $Q_i = 1$, which simplifies the formula as

$$\begin{aligned} \text{AD} = & -N(1 + \log(1 - Z_1) + \log(Z_K)) \\ & + N \sum_{i=2}^K [F_n(Z_{i-1})^2 A_i - (1 - F_n(Z_{i-1}))^2 B_i] \end{aligned}$$

CvM The Cramér-von Mises (CvM) statistic is a quadratic EDF statistic that is proportional to the expected value of the squared difference between the EDF and CDF. It is formally defined as follows:

$$\text{CvM} = N \int_{-\infty}^{\infty} (F_n(y) - F(y))^2 dF(y)$$

If the STANDARD method is used to compute the EDF, then the following formula is used:

$$\text{CvM} = \frac{1}{12N} + \sum_{i=1}^N \left(Z_i - \frac{(2r_i - 1)}{2N} \right)^2$$

If the method used to compute the EDF is any method other than the STANDARD method, then the statistic can be computed by using the following two pieces of information:

- As described previously for the AD statistic, the EDF estimates are assumed to be piecewise linear such that the estimate $F_n(y)$ at y is

$$F_n(z) = F_n(Z_{i-1}) + S_i(z - Z_{i-1}), \text{ for } z \in [Z_{i-1}, Z_i]$$

where S_i is the slope of the line defined as

$$S_i = \frac{F_n(Z_i) - F_n(Z_{i-1})}{Z_i - Z_{i-1}}$$

For the KAPLANMEIER or MODIFIEDKM method, $S_i = 0$ in each interval.

- Using the probability integral transform $z = F(y)$, the formula simplifies to:

$$\text{CvM} = N \int_{-\infty}^{\infty} (F_n(z) - z)^2 dz$$

The computation formula can then be derived from the following approximation:

$$\begin{aligned}\text{CvM} &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} (F_n(z) - z)^2 dz \\ &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} (F_n(Z_{i-1}) + S_i(z - Z_{i-1}) - z)^2 dz \\ &= N \sum_{i=1}^{K+1} \int_{Z_{i-1}}^{Z_i} (P_i - Q_i z)^2 dz\end{aligned}$$

where $P_i = F_n(Z_{i-1}) - S_i Z_{i-1}$, $Q_i = 1 - S_i$, and K is the number of points at which the EDF estimate are computed. For the TURNBULL method, $K = 2k$ for some k .

Assuming $Z_0 = 0$, $Z_{K+1} = 1$, and $F_n(0) = 0$ yields the following computation formula:

$$\text{CvM} = N \frac{Z_1^3}{3} + N \sum_{i=2}^{K+1} \left[P_i^2 A_i - P_i Q_i B_i - \frac{Q_i^2}{3} C_i \right]$$

where $A_i = Z_i - Z_{i-1}$, $B_i = Z_i^2 - Z_{i-1}^2$, and $C_i = Z_i^3 - Z_{i-1}^3$.

If EDF estimates are computed using the KAPLANMEIER or MODIFIEDKM method, then $P_i = F_n(Z_{i-1})$ and $Q_i = 1$, which simplifies the formula as

$$\text{CvM} = \frac{N}{3} + N \sum_{i=2}^{K+1} [F_n(Z_{i-1})^2 (Z_i - Z_{i-1}) - F_n(Z_{i-1}) (Z_i^2 - Z_{i-1}^2)]$$

which is similar to the formula proposed by Koziol and Green (1976).

Defining a Distribution Model with the FCMP Procedure

A severity *distribution model* consists of a set of functions and subroutines that are defined using the FCMP procedure. The FCMP procedure is part of Base SAS software. Each function or subroutine must be named as `<distribution-name>_<keyword>`, where *distribution-name* is the identifying short name of the distribution and *keyword* identifies one of the functions or subroutines. The total length of the name should not exceed 32. Each function or subroutine must have a specific signature, which consists of the number of arguments, sequence and types of arguments, and return value type. The summary of all the recognized function and subroutine names and their expected behavior is given in [Table 23.4](#).

Consider following points when you define a distribution model:

- When you define a function or subroutine requiring parameter arguments, the names and order of those arguments must be the same. Arguments other than the parameter arguments can have any name, but they must satisfy the requirements on their type and order.
- When the SEVERITY procedure invokes any function or subroutine, it provides the necessary input values according to the specified signature, and expects the function or subroutine to prepare the output and return it according to the specification of the return values in the signature.

- You can typically use most of the SAS programming statements and SAS functions that you can use in a DATA step for defining the FCMP functions and subroutines. However, there are a few differences in the capabilities of the DATA step and the FCMP procedure. Refer to the documentation of the FCMP procedure to learn more.
- You must specify either the PDF or the LOGPDF function. Similarly, you must specify either the CDF or the LOGCDF function. All other functions are optional, except when necessary for correct definition of the distribution. It is strongly recommended that you define the PARMINIT subroutine to provide a good set of initial values for the parameters. The information provided by PROC SEVERITY to the PARMINIT subroutine enables you to use popular initialization approaches based on the method of moments and the method of percentile matching, but you can implement any algorithm to initialize the parameters by using the values of the response variable and the estimate of its empirical distribution function.
- The LOWERBOUNDS subroutines should be defined if the lower bound on at least one distribution parameter is different from the default lower bound of 0. If you define a LOWERBOUNDS subroutine but do not set a lower bound for some parameter inside the subroutine, then that parameter is assumed to have no lower bound (or a lower bound of $-\infty$). Hence, it is recommended that you explicitly return the lower bound for each parameter when you define the LOWERBOUNDS subroutine.
- The UPPERBOUNDS subroutines should be defined if the upper bound on at least one distribution parameter is different from the default upper bound of ∞ . If you define an UPPERBOUNDS subroutine but do not set an upper bound for some parameter inside the subroutine, then that parameter is assumed to have no upper bound (or a upper bound of ∞). Hence, it is recommended that you explicitly return the upper bound for each parameter when you define the UPPERBOUNDS subroutine.
- If you want to use the distribution in a model with regression effects, then make sure that the first parameter of the distribution is the scale parameter itself or a log-transformed scale parameter. If the first parameter is a log-transformed scale parameter, then you must define the SCALETRANSFORM function.
- In general, it is not necessary to define the gradient and Hessian functions, because PROC SEVERITY uses an internal system to evaluate the required derivatives. The internal system typically computes the derivatives analytically. But it might not be able to do so if your function definitions use other functions that it cannot differentiate analytically. In such cases, derivatives are approximated using a finite difference method and a note is written to the SAS log to indicate the components that are differentiated using such approximations. PROC SEVERITY does reasonably well with these finite difference approximations. But, if you know of a way to compute the derivatives of such components analytically, then you should define the gradient and Hessian functions.

In order to use your distribution with PROC SEVERITY, you need to record the FCMP library that contains the functions and subroutines for your distribution and other FCMP libraries that contain FCMP functions or subroutines used within your distribution's functions and subroutines. Specify all those libraries in the CMPLIB= system option by using the OPTIONS global statement. For more information about the OPTIONS statement, see the *SAS Statements: Reference*. For more information about the CMPLIB= system option, see the *SAS System Options: Reference*.

Each predefined distribution mentioned in the section “[Predefined Distributions](#)” on page 1551 has a distribution model associated with it. The functions and subroutines of all those models are available in the Sashelp.Svrtldist library. The order of the parameters in the signatures of the functions and subroutines is

the same as listed in Table 23.2. You do not need to use the CMPLIB= option in order to use the predefined distributions with PROC SEVERITY. However, if you need to use the functions or subroutines of the predefined distributions in SAS statements other than the PROC SEVERITY step (such as in a DATA step), then specify the Sashelp.Svrtldist library in the CMPLIB= system option by using the OPTIONS global statement prior to using them.

Table 23.4 shows functions and subroutines that define a distribution model, and subsections after the table provide more detail. The functions are listed in alphabetical order of the keyword suffix.

Table 23.4 List of Functions and Subroutines That Define a Distribution Model

Name	Type	Required	Expected to Return
<i>dist_CDF</i>	Function	YES ¹	Cumulative distribution function value
<i>dist_CDFGRADIENT</i>	Subroutine	NO	Gradient of the CDF
<i>dist_CDFHESSIAN</i>	Subroutine	NO	Hessian of the CDF
<i>dist_CONSTANTPARM</i>	Subroutine	NO	Constant parameters
<i>dist_DESCRIPTION</i>	Function	NO	Description of the distribution
<i>dist_LOGCDF</i>	Function	YES ¹	Log of cumulative distribution function value
<i>dist_LOGCDFGRADIENT</i>	Subroutine	NO	Gradient of the LOGCDF
<i>dist_LOGCDFHESSIAN</i>	Subroutine	NO	Hessian of the LOGCDF
<i>dist_LOGPDF</i>	Function	YES ²	Log of probability density function value
<i>dist_LOGPDFGRADIENT</i>	Subroutine	NO	Gradient of the LOGPDF
<i>dist_LOGPDFHESSIAN</i>	Subroutine	NO	Hessian of the LOGPDF
<i>dist_LOGSDF</i>	Function	NO	Log of survival function value
<i>dist_LOGSDFGRADIENT</i>	Subroutine	NO	Gradient of the LOGSDF
<i>dist_LOGSDFHESSIAN</i>	Subroutine	NO	Hessian of the LOGSDF
<i>dist_LOWERBOUNDS</i>	Subroutine	NO	Lower bounds on parameters
<i>dist_PARMINIT</i>	Subroutine	NO	Initial values for parameters
<i>dist_PDF</i>	Function	YES ²	Probability density function value
<i>dist_PDFGRADIENT</i>	Subroutine	NO	Gradient of the PDF
<i>dist_PDFHESSIAN</i>	Subroutine	NO	Hessian of the PDF
<i>dist_SCALETRANSFORM</i>	Function	NO	Type of relationship between the first distribution parameter and the scale parameter
<i>dist_SDF</i>	Function	NO	Survival function value
<i>dist_SDFGRADIENT</i>	Subroutine	NO	Gradient of the SDF
<i>dist_SDFHESSIAN</i>	Subroutine	NO	Hessian of the SDF
<i>dist_UPPERBOUNDS</i>	Subroutine	NO	Upper bounds on parameters

Notes:

1. Either the *dist_CDF* or the *dist_LOGCDF* function must be defined.
2. Either the *dist_PDF* or the *dist_LOGPDF* function must be defined.

The signature syntax and semantics of each function or subroutine are as follows:

dist_CDF

defines a function that returns the value of the cumulative distribution function (CDF) of the distribution at the specified values of the random variable and distribution parameters.

- *Type*: Function
- *Required*: YES
- *Number of arguments*: $m + 1$, where m is the number of distribution parameters
- *Sequence and type of arguments*:
 - x Numeric value of the random variable at which the CDF value should be evaluated
 - p_1 Numeric value of the first parameter
 - p_2 Numeric value of the second parameter
 -
 - p_m Numeric value of the m th parameter
- *Return value*: Numeric value that contains the CDF value $F(x; p_1, p_2, \dots, p_m)$

If you want to consider this distribution as a candidate distribution when estimating a response variable model with regression effects, then the first parameter of this distribution must be a scale parameter or log-transformed scale parameter. In other words, if the distribution has a scale parameter, then the following equation must be satisfied:

$$F(x; p_1, p_2, \dots, p_m) = F\left(\frac{x}{p_1}; 1, p_2, \dots, p_m\right)$$

If the distribution has a log-transformed scale parameter, then the following equation must be satisfied:

$$F(x; p_1, p_2, \dots, p_m) = F\left(\frac{x}{\exp(p_1)}; 0, p_2, \dots, p_m\right)$$

Here is a sample structure of the function for a distribution named 'FOO':

```
function FOO_CDF(x, P1, P2);
  /* Code to compute CDF by using x, P1, and P2 */

  F = <computed CDF>;
  return (F);
endsub;
```

dist_CONSTANTPARM

defines a subroutine that specifies constant parameters. A parameter is *constant* if it is required for defining a distribution but is not subject to optimization in PROC SEVERITY. Constant parameters are required to be part of the model in order to compute the PDF or the CDF of the distribution. Typically, values of these parameters are known a priori or estimated using some means other than the maximum likelihood method used by PROC SEVERITY. You can estimate them inside the *dist_PARMINIT* subroutine. Once initialized, the parameters remain constant in the context of PROC SEVERITY; that is, they retain their initial value. PROC SEVERITY estimates only the nonconstant parameters.

- *Type*: Subroutine
- *Required*: NO
- *Number of arguments*: k , where k is the number of constant parameters
- *Sequence and type of arguments*:
 constant parameter 1 Name of the first constant parameter

 constant parameter k Name of the k th constant parameter
- *Return value*: None

Here is a sample structure of the subroutine for a distribution named 'FOO' that has P3 and P5 as its constant parameters, assuming that distribution has at least three parameters:

```
subroutine FOO_CONSTANTPARM(p5, p3);
endsub;
```

The following points should be noted while specifying the constant parameters:

- At least one distribution parameter must be free to be optimized; that is, if a distribution has total m parameters, then k must be strictly less than m .
- If you want to use this distribution for modeling regression effects, then the first parameter must not be a constant parameter.
- The order of arguments in the signature of this subroutine does not matter as long as each argument's name matches the name of one of the parameters that are defined in the signature of the *dist_PDF* function.
- The constant parameters must be specified in signatures of all the functions and subroutines that accept distribution parameters as their arguments.
- You must provide a nonmissing initial value for each constant parameter by using one of the supported parameter initialization methods.

*dist_***DESCRIPTION**

defines a function that returns a description of the distribution.

- *Type*: Function
- *Required*: NO
- *Number of arguments*: None
- *Sequence and type of arguments*: Not applicable
- *Return value*: Character value containing a description of the distribution

Here is a sample structure of the function for a distribution named 'FOO':

```
function FOO_DESCRIPTION() $48;
    length desc $48;
    desc = "A model for a continuous distribution named foo";
    return (desc);
endsub;
```

There is no restriction on the length of the description (the length of 48 used in the previous example is for illustration purposes only). However, if the length is greater than 256, then only the first 256 characters appear in the displayed output and in the `_DESCRIPTION_` variable of the `OUTMODELINFO=` data set. Hence, the recommended length of the description is less than or equal to 256.

`dist_LOGcore`

defines a function that returns natural logarithm of the specified *core* function of the distribution at the specified values of the random variable and distribution parameters. The *core* keyword can be PDF, CDF, or SDF.

- *Type*: Function
- *Required*: YES only if *core* is PDF or CDF and you have not defined that *core* function; otherwise, NO
- *Number of arguments*: $m + 1$, where m is the number of distribution parameters
- *Sequence and type of arguments*:
 - x Numeric value of the random variable at which the natural logarithm of the *core* function should be evaluated
 - $p1$ Numeric value of the first parameter
 - $p2$ Numeric value of the second parameter
 -
 - pm Numeric value of the m th parameter
- *Return value*: Numeric value that contains the natural logarithm of the *core* function

Here is a sample structure of the function for the core function PDF of a distribution named 'FOO':

```
function FOO_LOGPDF(x, P1, P2);
  /* Code to compute LOGPDF by using x, P1, and P2 */

  l = <computed LOGPDF>;
  return (l);
endsub;
```

`dist_LOWERBOUNDS`

defines a subroutine that returns lower bounds for the parameters of the distribution. If this subroutine is not defined for a given distribution, then the SEVERITY procedure assumes a lower bound of 0 for each parameter. If a lower bound of l_i is returned for a parameter p_i , then the SEVERITY procedure assumes that $l_i < p_i$ (strict inequality). If a missing value is returned for some parameter, then the SEVERITY procedure assumes that there is no lower bound for that parameter (equivalent to a lower bound of $-\infty$).

- *Type*: Subroutine
- *Required*: NO
- *Number of arguments*: m , where m is the number of distribution parameters
- *Sequence and type of arguments*:

- | | |
|-------|---|
| p1 | Output argument that returns the lower bound on the first parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |
| p2 | Output argument that returns the lower bound on the second parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |
| | |
| pm | Output argument that returns the lower bound on the m th parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |
- *Return value:* The results, lower bounds on parameter values, should be returned in the parameter arguments of the subroutine.

Here is a sample structure of the subroutine for a distribution named 'FOO':

```
subroutine FOO_LOWERBOUNDS(p1, p2);
    outargs p1, p2;

    p1 = <lower bound for P1>;
    p2 = <lower bound for P2>;
endsub;
```

*dist_***PARINIT**

defines a subroutine that returns the initial values for the distribution's parameters given an empirical distribution function (EDF) estimate.

- *Type:* Subroutine
- *Required:* NO
- *Number of arguments:* $m + 4$, where m is the number of distribution parameters
- *Sequence and type of arguments:*

- | | |
|-------|---|
| dim | Input numeric value that contains the dimension of the x, nx, and F array arguments. |
| x{*} | Input numeric array of dimension <i>dim</i> that contains values of the random variables at which the EDF estimate is available. It can be assumed that x contains values in an increasing order. In other words, if $i < j$, then $x[i] < x[j]$. |
| nx{*} | Input numeric array of dimension <i>dim</i> . Each $nx[i]$ contains the number of observations in the original data that have the value $x[i]$. |
| F{*} | Input numeric array of dimension <i>dim</i> . Each $F[i]$ contains the EDF estimate for $x[i]$. This estimate is computed by the SEVERITY procedure based on the EMPIRICALCDF= option. |
| Ftype | Input numeric value that contains the type of the EDF estimate that is stored in x and F. See the section “ Supplying EDF Estimates to Functions and Subroutines ” on page 1574 for definition of types. |
| p1 | Output argument that returns the initial value of the first parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |
| p2 | Output argument that returns the initial value of the second parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |
| | |
| pm | Output argument that returns the initial value of the m th parameter. This must be specified in the OUTARGS statement inside the subroutine's definition. |

- *Return value:* The results, initial values of the parameters, should be returned in the parameter arguments of the subroutine.

Here is a sample structure of the subroutine for a distribution named 'FOO':

```
subroutine FOO_PARMINIT(dim, x{*}, nx{*}, F{*}, Ftype, p1, p2);
    outargs p1, p2;

    /* Code to initialize values of P1 and P2 by using
       dim, x, nx, and F */

    p1 = <initial value for p1>;
    p2 = <initial value for p2>;
endsub;
```

dist_PDF

defines a function that returns the value of the probability density function (PDF) of the distribution at the specified values of the random variable and distribution parameters.

- *Type:* Function
- *Required:* YES
- *Number of arguments:* $m + 1$, where m is the number of distribution parameters
- *Sequence and type of arguments:*

x Numeric value of the random variable at which the PDF value should be evaluated

$p1$ Numeric value of the first parameter

$p2$ Numeric value of the second parameter

.....

pm Numeric value of the m th parameter

- *Return value:* Numeric value that contains the PDF value $f(x; p_1, p_2, \dots, p_m)$

If you want to consider this distribution as a candidate distribution when estimating a response variable model with regression effects, then the first parameter of this distribution must be a scale parameter or log-transformed scale parameter. In other words, if the distribution has a scale parameter, then the following equation must be satisfied:

$$f(x; p_1, p_2, \dots, p_m) = \frac{1}{p_1} f\left(\frac{x}{p_1}; 1, p_2, \dots, p_m\right)$$

If the distribution has a log-transformed scale parameter, then the following equation must be satisfied:

$$f(x; p_1, p_2, \dots, p_m) = \frac{1}{\exp(p_1)} f\left(\frac{x}{\exp(p_1)}; 0, p_2, \dots, p_m\right)$$

Here is a sample structure of the function for a distribution named 'FOO':

```
function FOO_PDF(x, P1, P2);
    /* Code to compute PDF by using x, P1, and P2 */

    f = <computed PDF>;
    return (f);
endsub;
```

*dist_*SCALETRANSFORM

defines a function that returns a keyword to identify the transform that needs to be applied to the scale parameter to convert it to the first parameter of the distribution.

If you want to use this distribution for modeling regression effects, then the first parameter of this distribution must be a scale parameter. However, for some distributions, a typical or convenient parameterization might not have a scale parameter, but one of the parameters can be a simple transform of the scale parameter. As an example, consider a typical parameterization of the lognormal distribution with two parameters, location μ and shape σ , for which the PDF is defined as follows:

$$f(x; \mu, \sigma) = \frac{1}{x\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{\log(x)-\mu}{\sigma}\right)^2}$$

You can reparameterize this distribution to contain a parameter θ instead of the parameter μ such that $\mu = \log(\theta)$. The parameter θ would then be a scale parameter. However, if you want to specify the distribution in terms of μ and σ (which is a more recognized form of the lognormal distribution) and still allow it as a candidate distribution for estimating regression effects, then instead of writing another distribution with parameters θ and σ , you can simply define the distribution with μ as the first parameter and specify that it is the logarithm of the scale parameter.

- *Type:* Function
- *Required:* NO
- *Number of arguments:* None
- *Sequence and type of arguments:* Not applicable
- *Return value:* Character value that contains one of the following keywords:

LOG	specifies that the first parameter is the logarithm of the scale parameter.
IDENTITY	specifies that the first parameter is a scale parameter without any transformation.

If this function is not specified, then the IDENTITY transform is assumed.

Here is a sample structure of the function for a distribution named 'FOO':

```
function FOO_SCALETRANSFORM() $8;
    length xform $8;
    xform = "IDENTITY";
    return (xform);
endsub;
```

dist_SDF

defines a function that returns the value of the survival distribution function (SDF) of the distribution at the specified values of the random variable and distribution parameters.

- *Type:* Function
- *Required:* NO
- *Number of arguments:* $m + 1$, where m is the number of distribution parameters
- *Sequence and type of arguments:*
 - x Numeric value of the random variable at which the SDF value should be evaluated
 - p_1 Numeric value of the first parameter
 - p_2 Numeric value of the second parameter
 -
 - p_m Numeric value of the m th parameter
- *Return value:* Numeric value that contains the SDF value $S(x; p_1, p_2, \dots, p_m)$

If you want to consider this distribution as a candidate distribution when estimating a response variable model with regression effects, then the first parameter of this distribution must be a scale parameter or log-transformed scale parameter. In other words, if the distribution has a scale parameter, then the following equation must be satisfied:

$$S(x; p_1, p_2, \dots, p_m) = S\left(\frac{x}{p_1}; 1, p_2, \dots, p_m\right)$$

If the distribution has a log-transformed scale parameter, then the following equation must be satisfied:

$$S(x; p_1, p_2, \dots, p_m) = S\left(\frac{x}{\exp(p_1)}; 0, p_2, \dots, p_m\right)$$

Here is a sample structure of the function for a distribution named 'FOO':

```
function FOO_SDF(x, P1, P2);
  /* Code to compute SDF by using x, P1, and P2 */

  S = <computed SDF>;
  return (S);
endsub;
```

dist_UPPERBOUNDS

defines a subroutine that returns upper bounds for the parameters of the distribution. If this subroutine is not defined for a given distribution, then the SEVERITY procedure assumes that there is no upper bound for any of the parameters. If an upper bound of u_i is returned for a parameter p_i , then the SEVERITY procedure assumes that $p_i < u_i$ (strict inequality). If a missing value is returned for some parameter, then the SEVERITY procedure assumes that there is no upper bound for that parameter (equivalent to an upper bound of ∞).

- *Type*: Subroutine
- *Required*: NO
- *Number of arguments*: m , where m is the number of distribution parameters
- *Sequence and type of arguments*:

p1	Output argument that returns the upper bound on the first parameter. This must be specified in the OUTARGS statement inside the subroutine's definition.
p2	Output argument that returns the upper bound on the second parameter. This must be specified in the OUTARGS statement inside the subroutine's definition.
....	
pm	Output argument that returns the upper bound on the m th parameter. This must be specified in the OUTARGS statement inside the subroutine's definition.
- *Return value*: The results, upper bounds on parameter values, should be returned in the parameter arguments of the subroutine.

Here is a sample structure of the subroutine for a distribution named 'FOO':

```
subroutine FOO_UPPERBOUNDS(p1, p2);
  outargs p1, p2;

  p1 = <upper bound for P1>;
  p2 = <upper bound for P2>;
endsub;
```

*dist_core*GRADIENT

defines a subroutine that returns the gradient vector of the specified *core* function of the distribution at the specified values of the random variable and distribution parameters. The *core* keyword can be PDF, CDF, SDF, LOGPDF, LOGCDF, or LOGSDF.

- *Type*: Subroutine
- *Required*: NO
- *Number of arguments*: $m + 2$, where m is the number of distribution parameters
- *Sequence and type of arguments*:

x	Numeric value of the random variable at which the gradient should be evaluated
p1	Numeric value of the first parameter
p2	Numeric value of the second parameter
....	
pm	Numeric value of the m th parameter
grad{*}	Output numeric array of size m that contains the gradient vector evaluated at the specified values. If h denotes the value of the <i>core</i> function, then the expected order of the values in the array is as follows: $\frac{\partial h}{\partial p_1} \frac{\partial h}{\partial p_2} \dots \frac{\partial h}{\partial p_m}$
- *Return value*: Numeric array that contains the gradient evaluated at x for the parameter values (p_1, p_2, \dots, p_m)

Here is a sample structure of the function for the core function CDF of a distribution named 'FOO':

```
subroutine FOO_CDFGRADIENT(x, P1, P2, grad{*});
    outargs grad;

    /* Code to compute gradient by using x, P1, and P2 */
    grad[1] = <partial derivative of CDF w.r.t. P1
              evaluated at x, P1, P2>;
    grad[2] = <partial derivative of CDF w.r.t. P2
              evaluated at x, P1, P2>;
endsub;
```

*dist_core*HESSEIAN

defines a subroutine that returns the Hessian matrix of the specified *core* function of the distribution at the specified values of the random variable and distribution parameters. The *core* keyword can be PDF, CDF, SDF, LOGPDF, LOGCDF, or LOGSDF.

- *Type*: Subroutine
- *Required*: NO
- *Number of arguments*: $m + 2$, where m is the number of distribution parameters
- *Sequence and type of arguments*:

x	Numeric value of the random variable at which the Hessian matrix should be evaluated
p1	Numeric value of the first parameter
p2	Numeric value of the second parameter
....	
pm	Numeric value of the m th parameter
hess{*}	Output numeric array of size $m(m + 1)/2$ that contains the lower triangular portion of the Hessian matrix in a packed vector form, evaluated at the specified values. If h denotes the value of the <i>core</i> function, then the expected order of the values in the array is as follows: $\frac{\partial^2 h}{\partial p_1^2} \mid \frac{\partial^2 h}{\partial p_1 \partial p_2} \mid \frac{\partial^2 h}{\partial p_2^2} \mid \cdots \mid \frac{\partial^2 h}{\partial p_1 \partial p_m} \mid \frac{\partial^2 h}{\partial p_2 \partial p_m} \cdots \frac{\partial^2 h}{\partial p_m^2}$

- *Return value*: Numeric array that contains the lower triangular portion of the Hessian matrix evaluated at x for the parameter values (p_1, p_2, \dots, p_m)

Here is a sample structure of the subroutine for the core function LOGSDF of a distribution named 'FOO':

```
subroutine FOO_LOGSDFHESSEIAN(x, P1, P2, hess{*});
    outargs hess;

    /* Code to compute Hessian by using x, P1, and P2 */
    hess[1] = <second order partial derivative of LOGSDF
              w.r.t. P1 evaluated at x, P1, P2>;
    hess[2] = <second order partial derivative of LOGSDF
              w.r.t. P1 and P2 evaluated at x, P1, P2>;
    hess[3] = <second order partial derivative of LOGSDF
              w.r.t. P2 evaluated at x, P1, P2>;
endsub;
```


Predefined Utility Functions

The following predefined utility functions are provided with the SEVERITY procedure and are available in the Sashelp.Svrtdist library:

SVRTUTIL_EDF:

This function computes the empirical distribution function (EDF) estimate at the specified value of the random variable given the EDF estimate for a sample.

- *Type:* Function
- *Signature:* SVRTUTIL_EDF(y, n, x{*}, F{*}, Ftype)
- *Argument Description:*

y	Value of the random variable at which the EDF estimate is desired.
n	Dimension of the x and F input arrays.
x{*}	Input numeric array of dimension n that contains values of the random variable observed in the sample. These values are sorted in nondecreasing order.
F{*}	Input numeric array of dimension n in which each $F[i]$ contains the EDF estimate for $x[i]$. These values must be sorted in nondecreasing order.
Ftype	Type of the empirical estimate that is stored in the x and F arrays. See the section “Supplying EDF Estimates to Functions and Subroutines” on page 1574 for definition of types.
- *Return value:* The EDF estimate at y .

The type of the sample EDF estimate determines how the EDF estimate at y is computed. See the section [“Supplying EDF Estimates to Functions and Subroutines”](#) on page 1574 for more details.

SVRTUTIL_EMPLIMMOMENT:

This function computes the empirical estimate of the limited moment of specified order for the specified upper limit, given the EDF estimate for a sample.

- *Type:* Function
- *Signature:* SVRTUTIL_EMPLIMMOMENT(k, u, n, x{*}, F{*}, Ftype)
- *Argument Description:*

k	Order of the desired empirical limited moment.
u	Upper limit on the value of the random variable to be used in the computation of the desired empirical limited moment.
n	Dimension of the x and F input arrays.
x{*}	Input numeric array of dimension n that contains values of the random variable observed in the sample. These values are sorted in nondecreasing order.
F{*}	Input numeric array of dimension n in which each $F[i]$ contains the EDF estimate for $x[i]$. These values must be sorted in nondecreasing order.

Ftype Type of the empirical estimate that is stored in the x and F arrays. See the section “[Supplying EDF Estimates to Functions and Subroutines](#)” on page 1574 for definition of types.

- **Return value:** The desired empirical limited moment.

The empirical limited moment is computed by using the empirical estimate of the CDF. If $F_n(x)$ denotes the EDF at x , then the empirical limited moment of order k with upper limit u is defined as

$$E_n[(X \wedge u)^k] = k \int_0^u (1 - F_n(x))x^{k-1} dx$$

The SVRTUTIL_EMPLIMMOMENT function uses the piecewise linear nature of $F_n(x)$ as described in the section “[Supplying EDF Estimates to Functions and Subroutines](#)” on page 1574 to compute the integration.

SVRTUTIL_HILLCUTOFF:

This function computes an estimate of the value where the right tail of a distribution is expected to begin. The function implements the algorithm described in Danielsson et al. 2001. The description of the algorithm uses the following notation:

- n number of observations in the original sample
- B number of bootstrap samples to draw
- m_1 size of the bootstrap sample in the first step of the algorithm ($m_1 < n$)
- $x_{(i)}^{j,m}$ i th order statistic of j th bootstrap sample of size m ($1 \leq i \leq m, 1 \leq j \leq B$)
- $x_{(i)}$ i th order statistic of the original sample ($1 \leq i \leq n$)

Given the input sample x and values of B and m_1 , the steps of the algorithm are as follows:

1. Take B bootstrap samples of size m_1 from the original sample.
2. Find the integer k_1 that minimizes the bootstrap estimate of the mean squared error:

$$k_1 = \arg \min_{1 \leq k < m_1} Q(m_1, k)$$

3. Take B bootstrap samples of size $m_2 = m_1^2/n$ from the original sample.
4. Find the integer k_2 that minimizes the bootstrap estimate of the mean squared error:

$$k_2 = \arg \min_{1 \leq k < m_2} Q(m_2, k)$$

5. Compute the integer k_{opt} , which is used for computing the cutoff point:

$$k_{\text{opt}} = \frac{k_1^2}{k_2} \left(\frac{\log(k_1)}{2 \log(m_1) - \log(k_1)} \right)^{2 - 2 \log(k_1) / \log(m_1)}$$

6. Set the cutoff point equal to $x_{(k_{\text{opt}}+1)}$.

The bootstrap estimate of the mean squared error is computed as

$$Q(m, k) = \frac{1}{B} \sum_{j=1}^B \text{MSE}_j(m, k)$$

The mean squared error of j th bootstrap sample is computed as

$$\text{MSE}_j(m, k) = (M_j(m, k) - 2(\gamma_j(m, k))^2)^2$$

where $M_j(m, k)$ is a control variate proposed by Danielsson et al. 2001,

$$M_j(m, k) = \frac{1}{k} \sum_{i=1}^k \left(\log(x_{(m-i+1)}^{j,m}) - \log(x_{(m-k)}^{j,m}) \right)^2$$

and $\gamma_j(m, k)$ is the Hill's estimator of the tail index (Hill 1975),

$$\gamma_j(m, k) = \frac{1}{k} \sum_{i=1}^k \log(x_{(m-i+1)}^{j,m}) - \log(x_{(m-k)}^{j,m})$$

This algorithm has two tuning parameters, B and m_1 . The number of bootstrap samples B is chosen based on the availability of computational resources. The optimal value of m_1 is chosen such that the following ratio, $R(m_1)$, is minimized:

$$R(m_1) = \frac{(Q(m_1, k_1))^2}{Q(m_2, k_2)}$$

The SVRTUTIL_HILLCUTOFF utility function implements the preceding algorithm. It uses the grid search method to compute the optimal value of m_1 .

- *Type:* Function
- *Signature:* SVRTUTIL_HILLCUTOFF(n , $x\{*\}$, b , s , $status$)
- *Argument Description:*

n	Dimension of the array x .
$x\{*\}$	Input numeric array of dimension n that contains the sample.
b	Number of bootstrap samples used to estimate the mean squared error. If b is less than 10, then a default value of 50 is used.
s	Approximate number of steps used to search the optimal value of m_1 in the range $[n^{0.75}, n - 1]$. If s is less than or equal to 1, then a default value of 10 is used.
$status$	Output argument that contains the status of the algorithm. If the algorithm succeeds in computing a valid cutoff point, then <i>status</i> is set to 0. If the algorithm fails, then <i>status</i> is set to 1.
- *Return value:* The cutoff value where the right tail is estimated to start. If the size of the input sample is inadequate ($n \leq 5$), then a missing value is returned and *status* is set to a missing value. If the algorithm fails to estimate a valid cutoff value (*status* = 1), then the fifth largest value in the input sample is returned.

SVRTUTIL_PERCENTILE:

This function computes the specified empirical percentile given the EDF estimates.

- *Type:* Function
- *Signature:* SVRTUTIL_PERCENTILE(p , n , $x\{*\}$, $F\{*\}$, $Ftype$)

- *Argument Description:*

p	Desired percentile. The value must be in the interval (0,1). The function returns the 100 p th percentile.
n	Dimension of the x and F input arrays.
x{*}	Input numeric array of dimension n that contains values of the random variable observed in the sample. These values are sorted in nondecreasing order.
F{*}	Input numeric array of dimension n in which each $F[i]$ contains the EDF estimate for $x[i]$. These values must be sorted in nondecreasing order.
Ftype	Type of the empirical estimate that is stored in the x and F arrays. See the section “ Supplying EDF Estimates to Functions and Subroutines ” on page 1574 for definition of types.

- *Return value:* The 100 p th percentile of the input sample.

The method used to compute the percentile depends on the type of the EDF estimate (Ftype argument).

Ftype = 1 Smoothed empirical estimates are computed using the method described in Klugman, Panjer, and Willmot (1998). Let $\lfloor x \rfloor$ denote the greatest integer less than or equal to x . Define $g = \lfloor p(n+1) \rfloor$ and $h = p(n+1) - g$. Then the empirical percentile $\hat{\pi}_p$ is defined as

$$\hat{\pi}_p = (1-h)x[g] + hx[g+1]$$

This method does not work if $p < 1/(n+1)$ or $p > n/(n+1)$. If $p < 1/(n+1)$, then the function returns $\hat{\pi}_p = x[1]/2$, which assumes that the EDF is 0 in the interval $[0, x[1])$. If $p > n/(n+1)$, then $\hat{\pi}_p = x[n]$.

Ftype = 2 If $p < F[1]$, then $\hat{\pi}_p = x[1]/2$, which assumes that the EDF is 0 in the interval $[0, x[1])$. If $|p - F[i]| < \epsilon$ for some value of i and $i < n$, then $\hat{\pi}_p$ is computed as

$$\hat{\pi}_p = \frac{x[i] + x[i+1]}{2}$$

where ϵ is a machine-precision constant as returned by the SAS function CONSTANT('MACEPS'). If $F[i-1] < p < F[i]$, then $\hat{\pi}_p$ is computed as

$$\hat{\pi}_p = x[i]$$

If $p \geq F[n]$, then $\hat{\pi}_p = x[n]$.

Ftype = 3 If $p < F[1]$, then $\hat{\pi}_p = x[1]/2$, which assumes that the EDF is 0 in the interval $[0, x[1])$. If $|p - F[i]| < \epsilon$ for some value of i and $i < n$, then $\hat{\pi}_p$ is computed as

$$\hat{\pi}_p = \frac{x[i] + x[i+1]}{2}$$

where ϵ is a machine-precision constant as returned by the SAS function CONSTANT('MACEPS'). If $F[i-1] < p < F[i]$, then $\hat{\pi}_p$ is computed as

$$\hat{\pi}_p = x[i-1] + (p - F[i-1]) \frac{x[i] - x[i-1]}{F[i] - F[i-1]}$$

If $p \geq F[n]$, then $\hat{\pi}_p = x[n]$.

SVRTUTIL_RAWMOMENTS:

This subroutine computes the raw moments of a sample.

- *Type:* Subroutine
- *Signature:* SVRTUTIL_RAWMOMENTS(*n*, *x*{*}, *nx*{*}, *nRaw*, *raw*{*})
- *Argument Description:*

<i>n</i>	Dimension of the <i>x</i> and <i>nx</i> input arrays.
<i>x</i> {*}	Input numeric array of dimension <i>n</i> that contains distinct values of the random variable that are observed in the sample.
<i>nx</i> {*}	Input numeric array of dimension <i>n</i> in which each <i>nx</i> [<i>i</i>] contains the number of observations in the sample that have the value <i>x</i> [<i>i</i>].
<i>nRaw</i>	Desired number of raw moments. The output array <i>raw</i> contains the first <i>nRaw</i> raw moments.
<i>raw</i> {*}	Output array of raw moments. The <i>k</i> th element in the array (<i>raw</i> { <i>k</i> }) contains the <i>k</i> th raw moment, where $1 \leq k \leq nRaw$.
- *Return value:* Numeric array *raw* that contains the first *nRaw* raw moments. The array contains missing values if the sample has no observations (that is, if all the values in the *nx* array add up to zero).

SVRTUTIL_SORT:

This function sorts the given array of numeric values in an ascending or descending order.

- *Type:* Subroutine
- *Signature:* SVRTUTIL_SORT(*n*, *x*{*}, *flag*)
- *Argument Description:*

<i>n</i>	Dimension of the input array <i>x</i> .
<i>x</i> {*}	Numeric array that contains the values to be sorted at input. The subroutine uses the same array to return the sorted values.
<i>flag</i>	A numeric value that controls the sort order. If <i>flag</i> is 0, then the values are sorted in an ascending order. If <i>flag</i> has any value other than 0, then the values are sorted in descending order.
- *Return value:* Numeric array *x*, which is sorted in place (that is, the sorted array is stored in the same storage area occupied by the input array *x*).

You can use the following predefined functions when you define functions and subroutines using the FCMP procedure. They are summarized here for your information. See the FCMP procedure documentation in *Base SAS Procedures Guide* for more details.

INVCDF:

This function computes the quantile from any continuous probability distribution by numerically inverting the CDF of that distribution. You need to specify the CDF function of the distribution, the values of its parameters, and the cumulative probability to compute the quantile.

LIMMOMENT:

This function computes the limited moment of order k with upper limit u for any continuous probability distribution. The limited moment is defined as

$$\begin{aligned} E[(X \wedge u)^k] &= \int_0^u x^k f(x) dx + \int_u^\infty u^k f(x) dx \\ &= \int_0^u x^k f(x) dx + u^k (1 - F(u)) \end{aligned}$$

where $f(x)$ and $F(x)$ denote the PDF and the CDF of the distribution, respectively. The LIMMOMENT function uses the following alternate definition, which can be derived using integration-by-parts:

$$E[(X \wedge u)^k] = k \int_0^u (1 - F(x)) x^{k-1} dx$$

You need to specify the CDF function of the distribution, the values of its parameters, and the values of k and u to compute the limited moment.

Custom Objective Functions (Experimental)

You can use a series of programming statements that use variables in the input data set specified by `DATA=` option in the PROC SEVERITY statement to assign a value to an objective function symbol. The objective function symbol must be specified using the `OBJECTIVE=` option in the PROC SEVERITY statement.

The objective function can be programmed such that it is applicable to any distribution that is used in the model. For that purpose, PROC SEVERITY recognizes the following *keyword* functions in the programming statements:

<code>_PDF_(x)</code>	returns the probability density function (PDF) of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_CDF_(x)</code>	returns the cumulative distribution function (CDF) of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_SDF_(x)</code>	returns the survival distribution function (SDF) of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_LOGPDF_(x)</code>	returns the natural logarithm of the PDF of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_LOGCDF_(x)</code>	returns the natural logarithm of the CDF of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_LOGSDF_(x)</code>	returns the natural logarithm of the SDF of a distribution evaluated at the current value of a data set variable <code>x</code> .
<code>_EDF_(x)</code>	returns the empirical distribution function (EDF) estimate evaluated at the current value of a data set variable <code>x</code> . Internally, PROC SEVERITY computes the estimate using the SVRTUTIL_EDF function as described in the section “ Predefined Utility Functions ” on page 1591. The EDF estimate required by the SVRTUTIL_EDF function is computed using the response variable values in the current BY group or in the entire input data set if no BY statement is specified.

`_EMPLIMMOMENT_(k, u)`

returns the empirical limited moment of order k evaluated at the current value of a data set variable u that represents the upper limit of the limited moment. The order k can also be a data set variable. Internally, PROC SEVERITY computes the moment using the SVRTUTIL_EMPLIMMOMENT function as described in the section “[Predefined Utility Functions](#)” on page 1591. The EDF estimate required by the SVRTUTIL_EMPLIMMOMENT function is computed using the response variable values in the current BY group or in the entire input data set if no BY statement is specified.

`_LIMMOMENT_(k, u)`

returns the limited moment of order k evaluated at the current value of a data set variable u that represents the upper limit of the limited moment. The order k can be a data set variable or a constant. Internally, for each candidate distribution, PROC SEVERITY computes the moment using the LIMMOMENT function as described in the section “[Predefined Utility Functions](#)” on page 1591.

All the preceding functions are right-hand side functions. They act as placeholders for distribution-specific functions, with the exception of `_EDF_` and `_EMPLIMMOMENT_` functions. As an example, let the data set `Work.Test` contain a response variable Y and a left-truncation threshold variable T . The following statements use the values in this data set to fit a model with distribution D such that the parameters of the model minimize the value of the objective function symbol `MYOBJ`:

```
options cmplib=(work.mydist);
proc severity data=work.test objective=myobj;
    loss y / lt=t;

    myobj = -_LOGPDF_(y);
    if (not(missing(t))) then
        myobj = myobj + log(1-_CDF_(t));

    dist d;
run;
```

The symbol `MYOBJ` is designated as an objective function symbol by using the `OBJECTIVE=` option in the PROC SEVERITY statement. The response variable Y and left-truncation variable T are specified in the LOSS statement. The distribution D is specified in the DIST statement. The remaining statements constitute a program that computes the value of the `MYOBJ` symbol.

Let the distribution D have parameters $P1$ and $P2$. In order to estimate the model for this distribution, PROC SEVERITY internally converts the generic program to the following program specific to distribution D :

```
myobj = -D_LOGPDF(y, p1, p2);
if (not(missing(t))) then
    myobj = myobj + log(1-D_CDF(t, p1, p2));
```

Note that the generic keyword functions `_LOGPDF_` and `_CDF_` have been replaced with distribution-specific functions `D_LOGPDF` and `D_CDF`, respectively, with appropriate distribution parameters. The `D_LOGPDF` and `D_CDF` functions must have been defined previously and are assumed to be available in the `Work.Mydist` library specified in the `CMPLIB=` option.

The program is executed for each observation in `Work.Test` to compute the value of `MYOBJ` by using the values of variables `Y` and `T` in that observation and internally computed values of the model parameters `P1` and `P2`. The values of `MYOBJ` are then added over all the observations of the data set or over all the observations of the current `BY` group if a `BY` statement is specified. The resulting aggregate value is the value of the objective function, and it is supplied to the optimizer. If the optimizer requires derivatives of the objective function, then `PROC SEVERITY` automatically differentiates `MYOBJ` with respect to the parameters `P1` and `P2`. The optimizer iterates over various combinations of the values of parameters `P1` and `P2`, each time computing a new value of the objective function and the needed derivatives of it, until it finds a combination that minimizes the objective function.

Note the following points when you define your own program to compute the custom objective function:

- The value of the objective function is always minimized by `PROC SEVERITY`. If you want to maximize the value of a certain objective, then add a statement that assigns the negated value of the maximization objective to the objective function symbol specified in the `OBJECTIVE=` option. Minimization of the negated objective is equivalent to the maximization of the original objective.
- If you are fitting multiple distributions in one `PROC SEVERITY` step and use any of the keyword functions in your program, then it is recommended that you do not explicitly use the parameters of any of the specified distributions in your programming statements.
- If you use a specific keyword function in your programming statements, then the corresponding distribution functions must be defined in a library specified in the `CMPLIB=` system option or in `Sashelp.Svrtdist`, the predefined functions library. In the preceding example, it is assumed that the functions `D_LOGPDF` and `D_CDF` are defined in the `Work.Mydist` library specified in the `CMPLIB=` option.
- You can use most `DATA` step statements and functions in your program. The `DATA` step file and the data set I/O statements (for example, `INPUT`, `FILE`, `SET`, and `MERGE`) are not available. However, some functionality of the `PUT` statement is supported. See the section “`PROC FCMP` and `DATA` Step Differences” in *Base SAS Procedures Guide* for more information. In addition to the differences listed in that section, the following differences exist:
 - Only numeric-valued variables can be used in `PROC SEVERITY` programming statements. This restriction also implies that you cannot use SAS functions or call routines that require character-valued arguments, unless you pass those arguments as constant (literal) strings or characters.
 - You cannot use functions that create lagged versions of a variable in `PROC SEVERITY` programming statements. If you need lagged versions, then you can use a `DATA` step prior to the `PROC SEVERITY` step to add those versions to the input data set.
- When coding your programming statements, avoid defining variables that begin with an underscore (`_`), because they might conflict with internal variables created by `PROC SEVERITY`.

Custom Objective Functions and Regression Effects

If you have specified regressors using the `SCALEMODEL` statement, then `PROC SEVERITY` automatically adds a statement prior to your programming statements to compute the value of the scale parameter or the log-transformed scale parameter of the distribution using the values of the regression variables and internally

created regression parameters. For example, if you have specified three regressors x_1 , x_2 , and x_3 in the **SCALEMODEL** statement, then for a model that contains the distribution **D** with scale parameter **S**, **PROC SEVERITY** prepends your program with a statement that is equivalent to the following statement:

$$S = _SEVTHETA0 * \exp(_SEVBETA1 * x_1 + _SEVBETA2 * x_2 + _SEVBETA3 * x_3);$$

If a model contains a distribution **D1** with a log-transformed scale parameter **M**, **PROC SEVERITY** prepends your program with a statement that is equivalent to the following statement:

$$M = _SEVTHETA0 + _SEVBETA1 * x_1 + _SEVBETA2 * x_2 + _SEVBETA3 * x_3;$$

The **_SEVTHETA0**, **_SEVBETA1**, **_SEVBETA2**, and **_SEVBETA3** are the internal regression parameters associated with the intercept and the regressors x_1 , x_2 , and x_3 , respectively.

Since the names of the internal regression parameters start with a prefix **_SEV**, if you use a variable in your program with a name that begins with **_SEV**, then **PROC SEVERITY** writes an error message to the SAS log and stops processing.

Input Data Sets

PROC SEVERITY accepts **DATA=** and **INEST=** data sets as input data sets. This section details the information they are expected to contain.

DATA= Data Set

The **DATA=** data set is expected to contain the values of the analysis variables specified in the **LOSS statement** and the **SCALEMODEL statement**.

If **BY** variables are specified in the **BY** statement, then the **DATA=** data set must contain all the variables specified in the **BY** statement and the data set must be sorted by the **BY** variables unless the **NOTSORTED** option is used in the **BY** statement.

INEST= Data Set

The **INEST=** data set is expected to contain the initial values of the parameters for the parameter estimation process.

If **BY** variables are specified in the **BY** statement, then the **INEST=** data set must contain all the variables specified in the **BY** statement. If the **NOTSORTED** option is not specified in the **BY** statement, then the **INEST=** data set must be sorted by the **BY** variables. However, it is not required to contain all the **BY** groups present in the **DATA=** data set. For the **BY** groups that are not present in the **INEST=** data set, the default parameter initialization method is used. If the **NOTSORTED** option is specified in the **BY** statement, then the **INEST=** data set must contain all the **BY** groups that are present in the **DATA=** data set and they must appear in the same order as they appear in the **DATA=** data set.

In addition to any variables specified in the BY statement, the data set must contain the following variables:

`_MODEL_` identifying name of the distribution for which the estimates are provided.
`_TYPE_` type of the estimate. The value of this variable must be EST for an observation to be valid.

`<Parameter 1> ... <Parameter M>`

M variables, named after the parameters of all candidate distributions, that contain initial values of the respective parameters. M is the cardinality of the union of parameter name sets from all candidate distributions. In an observation, estimates are read only from variables for parameters that correspond to the distribution specified by the `_MODEL_` variable.

If you specify a missing value for some parameters, then default initial values are used unless the parameter is initialized by using the `INIT=` option in the DIST statement. If you want to use the `dist_PARMINIT` subroutine for initializing the parameters of a model, then you should either not specify the model in the `INEST=` data set or specify missing values for all the distribution parameters in the `INEST=` data set and not use the `INIT=` option in the DIST statement.

If regressors are specified, then the initial value provided for the first parameter of each distribution must be the base value of the scale or log-transformed scale parameter. See the section “[Estimating Regression Effects](#)” on page 1566 for details.

`<Regressor 1> ... <Regressor K>`

If K regressors are specified in the [SCALEMODEL statement](#), then the `INEST=` data set must contain K variables that are named for each regressor. The variables contain initial values of the respective regression coefficients. If a regressor is linearly dependent on other regressors for a given BY group, then you can indicate this by providing a special missing value of .R for the respective variable. In a given BY group, if a variable is marked as linearly dependent for one model, then it must be marked so for all the models. Similarly, if a variable is not marked as linearly dependent for one model, then it must be marked so for all the models.

Output Data Sets

PROC SEVERITY writes OUTCDF=, OUTEST=, OUTMODELINFO=, and OUTSTAT= data sets when requested with respective options. The data sets and their contents are described in the following sections.

OUTCDF= Data Set

The OUTCDF= data set records the estimates of the cumulative distribution function (CDF) of each of the specified model distributions and an estimate of the empirical distribution function (EDF).

If BY variables are specified, then the data are organized in BY groups and the data set contains variables specified in the BY statement. In addition, it contains the following variables:

<response variable>	value of the response variable. The values are sorted. If there are multiple BY groups, the values are sorted within each BY group.
OBSNUM	observation number in the DATA= data set.
EDF	estimate of the empirical distribution function (EDF). This estimate is computed by using the EMPIRICALCDF= option specified in the PROC SEVERITY statement.
<distribution1>_CDF ... <distributionD>_CDF	estimate of the cumulative distribution function (CDF) for each of the D candidate distributions, computed by using the final parameter estimates for that distribution. This value is missing if parameter estimation process does not converge for the given distribution. If regressor variables are specified, then the reported estimates are from a mixture distribution. See the section “ CDF and PDF Estimates with Regression Effects ” on page 1569 for details.

If truncation is specified, then the data set contains the following additional variables:

<distribution1>_COND_CDF ... <distributionD>_COND_CDF	estimate of the conditional CDF for each of the D candidate distributions, computed by using the final parameter estimates for that distribution. This value is missing if parameter estimation process does not converge for the distribution. The conditional estimates are computed using the method described in the section “ Truncation and Conditional CDF Estimates ” on page 1562.
---	---

OUTEST= Data Set

The OUTEST= data set records the estimates of the model parameters. It also contains estimates of their standard errors and optionally, their covariance structure. If BY variables are specified, then the data are organized in BY groups and the data set contains variables specified in the BY statement.

If the COVOUT option is not specified, then the data set contains the following variables:

MODEL	identifying name of the distribution model. The observation contains information about this distribution.
TYPE	type of the estimates reported in this observation. It can take one of the following two values: EST point estimates of model parameters STDERR standard error estimates of model parameters
STATUS	status of the reported estimates. The possible values are listed in the section “ _STATUS_ Variable Values ” on page 1604.
<Parameter 1> ... <Parameter M>	M variables, named after the parameters of all candidate distributions, containing estimates of the respective parameters. M is the cardinality of the union of parameter name sets from all candidate distributions. In an observation, estimates are populated only

for parameters that correspond to the distribution specified by the `_MODEL_` variable. If `_TYPE_` is EST, then the estimates are missing if the model does not converge. If `_TYPE_` is STDERR, then the estimates are missing if covariance estimates cannot be obtained.

If regressors are specified, then the estimate reported for the first parameter of each distribution is the estimate of the base value of the scale or log-transformed scale parameter. See the section “[Estimating Regression Effects](#)” on page 1566 for details.

<Regressor 1> ... <Regressor K>

If K regressors are specified in the [SCALEMODEL statement](#), then the OUTEST= data set contains K variables that are named for each regressor. The variables contain estimates for their respective regression coefficients. If a regressor is deemed to be linearly dependent on other regressors for a given BY group, then a warning message is printed to the SAS log and a special missing value of .R is written in the respective variable. If `_TYPE_` is EST, then the estimates are missing if the model does not converge. If `_TYPE_` is STDERR, then the estimates are missing if covariance estimates cannot be obtained.

If the COVOUT option is specified, then the OUTEST= data set contains additional observations that contain the estimates of the covariance structure. Given the symmetric nature of the covariance structure, only the lower triangular portion is reported. In addition to the variables listed and described previously, the data set contains the following variables that are either new or have a modified description:

<code>_TYPE_</code>	type of the estimates reported in this observation. For observations that contain rows of the covariance structure, the value is COV.
<code>_STATUS_</code>	status of the reported estimates. For observations that contain rows of the covariance structure, the status is 0 if covariance estimation was successful. If estimation fails, the status is 1 and a single observation is reported with <code>_TYPE_=COV</code> and missing values for all the parameter variables.
<code>_NAME_</code>	Name of the parameter for the row of covariance matrix reported in the current observation.

OUTMODELINFO= Data Set

The OUTMODELINFO= data set records the information about each specified distribution. If BY variables are specified, then the data are organized in BY groups and the data set contains variables specified in the BY statement. In addition, it contains the following variables:

<code>_MODEL_</code>	identifying name of the distribution model. The observation contains information about this distribution.
<code>_DESCRIPTION_</code>	descriptive name of the model. This has a nonmissing value only if the DESCRIPTION function has been defined for this model.

`_PARMNAME1 ... _PARMNAME M`

M variables that contain names of parameters of the distribution model, where M is the maximum number of parameters across all the specified distribution models. For a given distribution with m parameters, values of variables `_PARMNAME j` ($j > m$) are missing.

OUTSTAT= Data Set

The OUTSTAT= data set records statistics of fit and model selection information. If BY variables are specified, then the data are organized in BY groups and the data set contains variables specified in the BY statement. The data set contains the following variables:

<code>_MODEL_</code>	identifying name of the distribution model. The observation contains information about this distribution.
<code>_NMODELPRM_</code>	number of parameters in the distribution.
<code>_NESTPRM_</code>	number of estimated parameters. This includes the regression parameters, if any regressors are specified.
<code>_NOBS_</code>	number of nonmissing observations used for parameter estimation.
<code>_STATUS_</code>	status of the parameter estimation process for this model. The possible values are listed in the section “ _STATUS_ Variable Values ” on page 1604.
<code>_SELECTED_</code>	indicator of the best distribution model. If the value is 1, then this model is the best model for the current BY group according to the specified model selection criterion. This value is missing if parameter estimation process does not converge for this model.
Neg2LogLike	value of the log likelihood, multiplied by -2 , that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
AIC	value of the Akaike’s information criterion (AIC) that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
AICC	value of the corrected Akaike’s information criterion (AICC) that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
BIC	value of the Schwarz Bayesian information criterion (BIC) that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
KS	value of the Kolmogorov-Smirnov (KS) statistic that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
AD	value of the Anderson-Darling (AD) statistic that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.

CVM	value of the Cramér-von Mises (CvM) statistic that is attained at the end of the parameter estimation process. This value is missing if parameter estimation process does not converge for this model.
-----	--

STATUS Variable Values

The `_STATUS_` variable in the `OUTEST=` and `OUTSTAT=` data sets contains a value that indicates the status of the parameter estimation process for the respective distribution model. The variable can take the following values in the `OUTEST=` data set for `_TYPE_=EST` observations and in the `OUTSTAT=` data set:

- 0 The parameter estimation process converged for this model.
- 301 The parameter estimation process might not have converged for this model because there is no improvement in the objective function value. This might indicate that the initial values of the parameters are optimal, or you can try different convergence criteria in the **NLOPTIONS** statement.
- 302 The parameter estimation process might not have converged for this model because the number of iterations exceeded the maximum allowed value. You can try setting a larger value for the `MAXITER=` options in the **NLOPTIONS** statement.
- 303 The parameter estimation process might not have converged for this model because the number of objective function evaluations exceeded the maximum allowed value. You can try setting a larger value for the `MAXFUNC=` options in the **NLOPTIONS** statement.
- 304 The parameter estimation process might not have converged for this model because the time taken by the process exceeded the maximum allowed value. You can try setting a larger value for the `MAXTIME=` option in the **NLOPTIONS** statement.
- 400 The parameter estimation process did not converge for this model.

The `_STATUS_` variable can take the following values in the `OUTEST=` data set for `_TYPE_=STDERR` and `_TYPE_=COV` observations:

- 0 The covariance and standard error estimates are available and valid.
- 1 The covariance and standard error estimates are not available, because the process of computing covariance estimates failed.

Displayed Output

The SEVERITY procedure optionally produces displayed output by using the Output Delivery System (ODS). All output is controlled by the `PRINT=` option in the `PROC SEVERITY` statement. [Table 23.5](#) relates the `PRINT=` options to ODS tables.

Table 23.5 ODS Tables Produced in PROC SEVERITY

ODS Table Name	Description	Option
DescStats	Descriptive statistics for the response variable	PRINT=DESCSTATS
RegDescStats	Descriptive statistics for the regressor variables	PRINT=DESCSTATS
ModelSelection	Model selection summary	PRINT=SELECTION
AllFitStatistics	Statistics of fit for all the distribution models	PRINT=ALLFITSTATS
InitialValues	Initial parameter values and bounds	PRINT=INITIALVALUES
ConvergenceStatus	Convergence status of parameter estimation process	PRINT=CONVSTATUS
IterationHistory	Optimization iteration history	PRINT=NLOHISTORY
OptimizationSummary	Optimization summary	PRINT=NLOSUMMARY
StatisticsOfFit	Statistics of fit	PRINT=STATISTICS
ParameterEstimates	Final parameter estimates	PRINT=ESTIMATES
TurnbullSummary	Turnbull EDF estimation summary	PRINT=ALL

If PRINT= option is not specified, then by default PROC SEVERITY produces ModelSelection, ConvergenceStatus, OptimizationSummary, StatisticsOfFit, and ParameterEstimates ODS tables.

The TurnbullSummary table is produced only if you specify PRINT=ALL and Turnbull's method is used for computing EDF estimates.

PRINT=DESCSTATS

displays the descriptive statistics for the response variable. If regressor variables are specified, a table with their descriptive statistics is also displayed.

PRINT=SELECTION

displays the model selection table. The table shows the convergence status of each candidate model, and the value of the selection criterion along with an indication of the selected model.

PRINT=ALLFITSTATS

displays the comparison of all the statistics of fit for all the models in one table. The table does not include the models whose parameter estimation process does not converge. If all the models fail to converge, then this table is not produced. If the table contains more than one model, then the best model according to each statistic is indicated with an asterisk (*) in that statistic's column.

PRINT=INITIALVALUES

displays the initial values and bounds used for estimating each model.

PRINT=CONVSTATUS

displays the convergence status of the parameter estimation process.

PRINT=NLOHISTORY

displays the iteration history of the nonlinear optimization process used for estimating the parameters.

PRINT=NLOSUMMARY

displays the summary of the nonlinear optimization process used for estimating the parameters.

PRINT=STATISTICS

displays the statistics of fit for each model. The statistics of fit are not displayed for models whose parameter estimation process does not converge.

PRINT=ESTIMATES

displays the final estimates of parameters. The estimates are not displayed for models whose parameter estimation process does not converge.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the SEVERITY procedure.

ODS Graph Names

PROC SEVERITY assigns a name to each graph it creates by using ODS. You can use these names to selectively reference the graphs. The names are listed in [Table 23.6](#).

Table 23.6 ODS Graphics Produced by PROC SEVERITY

ODS Graph Name	Plot Description	PLOTS= Option
CDFPlot	Comparative CDF Plot	CDF
CDFDistPlot	CDF Plot per Distribution	CDFPERDIST
PDFPlot	Comparative PDF Plot	PDF
PDFDistPlot	PDF Plot per Distribution	PDFPERDIST
PPPlot	P-P Plot of CDF and EDF	PP

Comparative CDF Plot

The comparative CDF plot helps you visually compare the cumulative distribution function (CDF) estimates of all the candidate distribution models and the empirical distribution function (EDF) estimate. The plot does not contain CDF estimates for models whose parameter estimation process does not converge. The horizontal axis represents the values of the response variable. The vertical axis represents the values of the CDF or EDF estimates.

If truncation is specified, then conditional CDF estimates are plotted. Otherwise, unconditional CDF estimates are plotted. The conditional estimates are computed using the method described in the section [“Truncation and Conditional CDF Estimates”](#) on page 1562.

If left-truncation is specified and the MARKTRUNCATED option is specified, then the left-truncated observations are marked in the plot. If right-censoring is specified, left-censoring is not specified, and the MARKCENSORED option is specified, then the right-censored observations are marked in the plot.

If regressor variables are specified, then the plotted CDF estimates are from a mixture distribution. See the section [“CDF and PDF Estimates with Regression Effects”](#) on page 1569 for details.

CDF Plot per Distribution

The CDF plot per distribution shows the CDF estimates of each candidate distribution model unless that model’s parameter estimation process does not converge. The plot also contains estimates of the EDF. The horizontal axis represents the values of the response variable. The vertical axis represents the values of the CDF or EDF estimates.

If truncation is specified, then conditional CDF estimates are plotted. Otherwise unconditional CDF estimates are plotted. The conditional estimates are computed using the method described in the section [“Truncation and Conditional CDF Estimates”](#) on page 1562.

If left-truncation is specified and the MARKTRUNCATED option is specified, then the left-truncated observations are marked in the plot. If right-censoring is specified, left-censoring is not specified, and the MARKCENSORED option is specified, then the right-censored observations are marked in the plot.

If regressor variables are specified, then the plotted CDF estimates are from a mixture distribution. See the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569 for details.

Comparative PDF Plot

The comparative PDF plot helps you visually compare the probability density function (PDF) estimates of all the candidate distribution models. The plot does not contain PDF estimates for models whose parameter estimation process does not converge. The horizontal axis represents the values of the response variable. The vertical axis represents the values of the PDF estimates.

If the HISTOGRAM option is specified, then the plot also contains the histogram of response variable values. If the KERNEL option is specified, then the plot also contains the kernel density estimate for the response variable values.

If regressor variables are specified, then the plotted PDF estimates are from a mixture distribution. See the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569 for details.

PDF Plot per Distribution

The PDF plot per distribution shows the PDF estimates of each candidate distribution model unless that model’s parameter estimation process does not converge. The horizontal axis represents the values of the response variable. The vertical axis represents the values of the PDF estimates.

If the HISTOGRAM option is specified, then the plot also contains the histogram of response variable values. If the KERNEL option is specified, then the plot also contains the kernel density estimate for the response variable values.

If regressor variables are specified, then the plotted PDF estimates are from a mixture distribution. See the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569 for details.

P-P Plot of CDF and EDF

The P-P plot of CDF and EDF is the probability-probability plot that compares the CDF estimates of a distribution with the EDF estimates. A plot is not prepared for models whose parameter estimation process does not converge. The horizontal axis represents the CDF estimates of a candidate distribution and the vertical axis represents the EDF estimates.

This plot can be interpreted as displaying the data that are used for computing the EDF-based statistics of fit for the given candidate distribution. As described in the section “[EDF-Based Statistics](#)” on page 1576, these statistics are computed by comparing the EDF, denoted by $F_n(y)$, and the CDF, denoted by $F(y)$, at each of the response variable values y . Using the probability inverse transform $z = F(y)$, this is equivalent to comparing the EDF of the z , denoted by $F_n(z)$, and the CDF of z , denoted by $F(z)$ (D’Agostino and Stephens 1986, Ch. 4). Given that the CDF of z is a uniform distribution ($F(z) = z$), the EDF-based

statistics can be computed by comparing the EDF estimate of z with the estimate of z . The horizontal axis of the plot represents the estimated CDF $\hat{z} = \hat{F}(y)$. The vertical axis represents the estimated EDF of z , $\hat{F}_n(z)$. The plot contains a scatter plot of $(\hat{z}, \hat{F}_n(z))$ points and a reference line $F_n(z) = z$ that represents the expected uniform distribution of z . Points scattered closer to the reference line indicate a better fit than the points scattered away from the reference line.

If truncation is specified, then the EDF estimates are conditional as described in the section “[EDF Estimates and Truncation](#)” on page 1573. So, conditional estimates of CDF are displayed, which are computed using the method described in the section “[Truncation and Conditional CDF Estimates](#)” on page 1562.

If regressor variables are specified, then the displayed CDF estimates, both unconditional and conditional, are from a mixture distribution. See the section “[CDF and PDF Estimates with Regression Effects](#)” on page 1569 for details.

Examples: SEVERITY Procedure

Example 23.1: Defining a Model for Gaussian Distribution

Suppose you want to fit a distribution model other than one of the predefined ones available to you. Suppose you want to define a model for the Gaussian distribution with the following typical parameterization of the PDF (f) and CDF (F):

$$f(x; \mu, \sigma) = \frac{1}{\sigma\sqrt{2\pi}} \exp\left(-\frac{(x - \mu)^2}{2\sigma^2}\right)$$

$$F(x; \mu, \sigma) = \frac{1}{2} \left(1 + \operatorname{erf}\left(\frac{x - \mu}{\sigma\sqrt{2}}\right)\right)$$

For PROC SEVERITY, a *distribution model* consists of a set of functions and subroutines that are defined with the FCMP procedure. Each function and subroutine should be written following certain rules. The details are provided in the section “[Defining a Distribution Model with the FCMP Procedure](#)” on page 1579.

NOTE: The Gaussian distribution is not a commonly used severity distribution. It is used in this example primarily to illustrate the process of defining your own distribution models. Although the distribution has a support over the entire real line, you can fit the distribution with PROC SEVERITY only if the input sample contains nonnegative values.

The following SAS statements define a distribution model named NORMAL for the Gaussian distribution. The OUTLIB= option in the PROC FCMP statement stores the compiled versions of the functions and subroutines in the ‘models’ package of the Work.Sevexmpl library. The LIBRARY= option in the PROC FCMP statement enables this PROC FCMP step to use the SVRTUTIL_RAWMOMENTS utility subroutine that is available in the Sashelp.SvrtDIST library. The subroutine is described in the section “[Predefined Utility Functions](#)” on page 1591.

```

/*----- Define Normal Distribution with PROC FCMP -----*/
proc fcmp library=sashelp.svrtldist outlib=work.sevexmpl.models;
  function normal_pdf(x,Mu,Sigma);
    /* Mu      : Location */
    /* Sigma   : Standard Deviation */
    return ( exp(-(x-Mu)**2/(2 * Sigma**2)) /
              (Sigma * sqrt(2*constant('PI')))) );
  endsub;

  function normal_cdf(x,Mu,Sigma);
    /* Mu      : Location */
    /* Sigma   : Standard Deviation */
    z = (x-Mu)/Sigma;
    return (0.5 + 0.5*erf(z/sqrt(2)));
  endsub;

  subroutine normal_parminit(dim, x[*], nx[*], F[*], Ftype, Mu, Sigma);
    outargs Mu, Sigma;
    array m[2] / nosymbols;

    /* Compute estimates by using method of moments */
    call svrtutil_rawmoments(dim, x, nx, 2, m);
    Mu    = m[1];
    Sigma = sqrt(m[2] - m[1]**2);
  endsub;

  subroutine normal_lowerbounds(Mu, Sigma);
    outargs Mu, Sigma;
    Mu = .; /* Mu has no lower bound */
    Sigma = 0; /* Sigma > 0 */
  endsub;
quit;

```

The statements define the two functions required of any distribution model (NORMAL_PDF and NORMAL_CDF) and two optional subroutines (NORMAL_PARMINIT and NORMAL_LOWERBOUNDS). The name of each function or subroutine must follow a specific structure. It should start with the model's short or identifying name, which is 'NORMAL' in this case, followed by an underscore '_', followed by a keyword suffix such as 'PDF'. Each function or subroutine has a specific purpose. The details of all the functions and subroutines that you can define for a distribution model are provided in the section [“Defining a Distribution Model with the FCMP Procedure”](#) on page 1579. Following is the description of each function and subroutine defined in this example:

- The PDF and CDF suffixes define functions that return the probability density function and cumulative distribution function values, respectively, given the values of the random variable and the distribution parameters.
- The PARMINIT suffix defines a subroutine that returns the initial values for the parameters by using the sample data or the empirical distribution function (EDF) estimate computed from it. In this example, the parameters are initialized by using the method of moments. Hence, you do not need to use the EDF estimates, which are available in the F array. The first two raw moments of the Gaussian

distribution are as follows:

$$E[x] = \mu, E[x^2] = \mu^2 + \sigma^2$$

Given the sample estimates, m_1 and m_2 , of these two raw moments, you can solve the equations $E[x] = m_1$ and $E[x^2] = m_2$ to get the following estimates for the parameters: $\hat{\mu} = m_1$ and $\hat{\sigma} = \sqrt{m_2 - m_1^2}$. The NORMAL_PARMINIT subroutine implements this solution. It uses the SVRTUTIL_RAWMOMENTS utility subroutine to compute the first two raw moments.

- The LOWERBOUNDS suffix defines a subroutine that returns the lower bounds on the parameters. PROC SEVERITY assumes a default lower bound of 0 for all the parameters when a LOWERBOUNDS subroutine is not defined. For the parameter μ (*Mu*), there is no lower bound, so you need to define the NORMAL_LOWERBOUNDS subroutine. It is recommended that you assign bounds for all the parameters when you define the LOWERBOUNDS subroutine or its counterpart, the UPPERBOUNDS subroutine. Any unassigned value is returned as a missing value, which is interpreted by PROC SEVERITY to mean that the parameter is unbounded, and that might not be what you want.

You can now use this distribution model with PROC SEVERITY. Let the following DATA step statements simulate a normal sample with $\mu = 10$ and $\sigma = 2.5$.

```
/*----- Simulate a Normal sample -----*/
data testnorm(keep=y);
  call streaminit(12345);
  do i=1 to 100;
    y = rand('NORMAL', 10, 2.5);
    output;
  end;
run;
```

Prior to using your distribution with PROC SEVERITY, you must communicate the location of the library that contains the definition of the distribution and the locations of libraries that contain any functions and subroutines used by your distribution model. The following OPTIONS statement sets the CMPLIB= system option to include the FCMP library Work.Sevexmpl in the search path used by PROC SEVERITY to find FCMP functions and subroutines.

```
/*--- Set the search path for functions defined with PROC FCMP ---*/
options cmplib=(work.sevexmpl);
```

Now, you are ready to fit the NORMAL distribution model with PROC SEVERITY. The following statements fit the model to the values of Y in the Work.Testnorm data set:

```
/*--- Fit models with PROC SEVERITY ---*/
proc severity data=testnorm print=all;
  loss y;
  dist Normal;
run;
```

The DIST statement specifies the identifying name of the distribution model, which is 'NORMAL'. Neither is the INEST= option specified in the PROC SEVERITY statement nor is the INIT= option specified in the DIST statement. So, PROC SEVERITY initializes the parameters by invoking the NORMAL_PARMINIT subroutine.

Some of the results prepared by the preceding PROC SEVERITY step are shown in [Output 23.1.1](#) and [Output 23.1.2](#). The descriptive statistics of variable Y and the “Model Selection Table”, which includes just the normal distribution, are shown in [Output 23.1.1](#).

Output 23.1.1 Summary of Results for Fitting the Normal Distribution

The SEVERITY Procedure			
Input Data Set			
Name	WORK.TESTNORM		
Descriptive Statistics for Variable y			
Number of Observations			100
Number of Observations Used for Estimation			100
Minimum			3.88249
Maximum			16.00864
Mean			10.02059
Standard Deviation			2.37730
Model Selection Table			
Distribution	Converged	-2 Log Likelihood	Selected
Normal	Yes	455.97541	Yes

The initial values for the parameters, the optimization summary, and the final parameter estimates are shown in [Output 23.1.2](#). No iterations are required to arrive at the final parameter estimates, which are identical to the initial values. This confirms the fact that the maximum likelihood estimates for the Gaussian distribution are identical to the estimates obtained by the method of moments that was used to initialize the parameters in the NORMAL_PARMINIT subroutine.

Output 23.1.2 Details of the Fitted Normal Distribution Model

The SEVERITY Procedure			
Distribution Information			
Name	Normal		
Number of Distribution Parameters	2		
Initial Parameter Values and Bounds for Normal Distribution			
Parameter	Initial Value	Lower Bound	Upper Bound
Mu	10.02059	-Infty	Infty
Sigma	2.36538	1.05367E-8	Infty

Output 23.1.2 *continued*

Optimization Summary for Normal Distribution				
Optimization Technique		Trust Region		
Number of Iterations		0		
Number of Function Evaluations		2		
Log Likelihood		-227.98770		
Parameter Estimates for Normal Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Mu	10.02059	0.23894	41.94	<.0001
Sigma	2.36538	0.16896	14.00	<.0001

The NORMAL distribution defined and illustrated here has no scale parameter, because all the following inequalities are true:

$$f(x; \mu, \sigma) \neq \frac{1}{\mu} f\left(\frac{x}{\mu}; 1, \sigma\right)$$

$$f(x; \mu, \sigma) \neq \frac{1}{\sigma} f\left(\frac{x}{\sigma}; \mu, 1\right)$$

$$F(x; \mu, \sigma) \neq F\left(\frac{x}{\mu}; 1, \sigma\right)$$

$$F(x; \mu, \sigma) \neq F\left(\frac{x}{\sigma}; \mu, 1\right)$$

This implies that you cannot estimate the effect of regressors on a model for the response variable based on this distribution.

Example 23.2: Defining a Model for Gaussian Distribution with a Scale Parameter

If you want to estimate the effects of regressors, then the model needs to be parameterized to have a scale parameter. While this might not be always possible, for the case of the Gaussian distribution it is possible by replacing the location parameter μ with another parameter, $\alpha = \mu/\sigma$, and defining the PDF (f) and the CDF (F) as follows:

$$f(x; \sigma, \alpha) = \frac{1}{\sigma \sqrt{2\pi}} \exp\left(-\frac{1}{2} \left(\frac{x}{\sigma} - \alpha\right)^2\right)$$

$$F(x; \sigma, \alpha) = \frac{1}{2} \left(1 + \operatorname{erf}\left(\frac{1}{\sqrt{2}} \left(\frac{x}{\sigma} - \alpha\right)\right)\right)$$

It can be verified that σ is the scale parameter, because both of the following equalities are true:

$$f(x; \sigma, \alpha) = \frac{1}{\sigma} f\left(\frac{x}{\sigma}; 1, \alpha\right)$$

$$F(x; \sigma, \alpha) = F\left(\frac{x}{\sigma}; 1, \alpha\right)$$

NOTE: The Gaussian distribution is not a commonly used severity distribution. It is used in this example primarily to illustrate the concept of parameterizing a distribution such that it has a scale parameter. Although the distribution has a support over the entire real line, you can fit the distribution with PROC SEVERITY only if the input sample contains nonnegative values.

The following statements use the alternate parameterization to define a new model named NORMAL_S. The definition is stored in the Work.Sevexmpl library.

```

/*----- Define Normal Distribution With Scale Parameter -----*/
proc fcmp library=sashelp.svrtldist outlib=work.sevexmpl.models;
  function normal_s_pdf(x, Sigma, Alpha);
    /* Sigma : Scale & Standard Deviation */
    /* Alpha : Scaled mean */
    return ( exp(-(x/Sigma - Alpha)**2/2) /
              (Sigma * sqrt(2*constant('PI'))) );
  endsub;

  function normal_s_cdf(x, Sigma, Alpha);
    /* Sigma : Scale & Standard Deviation */
    /* Alpha : Scaled mean */
    z = x/Sigma - Alpha;
    return (0.5 + 0.5*erf(z/sqrt(2)));
  endsub;

  subroutine normal_s_parminit(dim, x[*], nx[*], F[*], Ftype, Sigma, Alpha);
    outargs Sigma, Alpha;
    array m[2] / nosymbols;

    /* Compute estimates by using method of moments */
    call svrtutil_rawmoments(dim, x, nx, 2, m);
    Sigma = sqrt(m[2] - m[1]**2);
    Alpha = m[1]/Sigma;
  endsub;

  subroutine normal_s_lowerbounds(Sigma, Alpha);
    outargs Sigma, Alpha;
    Alpha = .; /* Alpha has no lower bound */
    Sigma = 0; /* Sigma > 0 */
  endsub;
quit;

```

An important point to note is that the scale parameter *Sigma* is the first distribution parameter (after the 'x' argument) listed in the signatures of NORMAL_S_PDF and NORMAL_S_CDF functions. *Sigma* is also the first distribution parameter listed in the signatures of other subroutines. This is required by PROC SEVERITY, so that it can identify which is the scale parameter. When regressor variables are specified, PROC SEVERITY checks whether the first parameter of each candidate distribution is a scale parameter (or

a log-transformed scale parameter if `dist_SCALETRANSFORM` subroutine is defined for the distribution with LOG as the transform). If it is not, then an appropriate message is written the SAS log and that distribution is not fitted.

Let the following DATA step statements simulate a sample from the normal distribution where the parameter σ is affected by the regressors as follows:

$$\sigma = \exp(1 + 0.5 X_1 + 0.75 X_3 - 2 X_4 + X_5)$$

The sample is simulated such that the regressor X_2 is linearly dependent on regressors X_1 and X_3 .

```
/*--- Simulate a Normal sample affected by Regressors ---*/
data testnorm_reg(keep=y x1-x5 Sigma);
  array x{*} x1-x5;
  array b{6} _TEMPORARY_ (1 0.5 . 0.75 -2 1);
  call streaminit(34567);
  label y='Normal Response Influenced by Regressors';

  do n = 1 to 100;
    /* simulate regressors */
    do i = 1 to dim(x);
      x(i) = rand('UNIFORM');
    end;
    /* make x2 linearly dependent on x1 and x3 */
    x(2) = x(1) + 5 * x(3);

    /* compute log of the scale parameter */
    logSigma = b(1);
    do i = 1 to dim(x);
      if (i ne 2) then
        logSigma = logSigma + b(i+1) * x(i);
    end;

    Sigma = exp(logSigma);
    y = rand('NORMAL', 25, Sigma);

    output;
  end;
run;
```

The following statements use PROC SEVERITY to fit the NORMAL_S distribution model along with some of the predefined distributions to the simulated sample:

```
/*--- Set the search path for functions defined with PROC FCMP ---*/
options cmplib=(work.sevexmpl);

/*----- Fit models with PROC SEVERITY -----*/
proc severity data=testnorm_reg print=all plots=none;
  loss y;
  scalemodel x1-x5;
  dist Normal_s burr logn pareto weibull;
run;
```

The “Model Selection Table” in [Output 23.2.1](#) indicates that all the models, except the Burr distribution model, have converged. Also, only three models, Normal_s, Burr, and Weibull, seem to have a good fit for

the data. The table that compares all the fit statistics indicates that Normal_s model is the best according to the likelihood-based statistics; however, the Burr model is the best according to the EDF-based statistics.

Output 23.2.1 Summary of Results for Fitting the Normal Distribution with Regressors

The SEVERITY Procedure					
Input Data Set					
Name	WORK.TESTNORM_REG				
Model Selection Table					
Distribution	Converged	-2 Log Likelihood		Selected	
Normal_s	Yes	603.95786		Yes	
Burr	Maybe	612.80861		No	
Logn	Yes	749.20125		No	
Pareto	Yes	841.07013		No	
Weibull	Yes	612.77496		No	
All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
Normal_s	603.95786*	615.95786*	616.86108*	631.58888*	1.56822*
Burr	612.80861	626.80861	628.02600	645.04480	1.59005
Logn	749.20125	761.20125	762.10448	776.83227	2.89985
Pareto	841.07013	853.07013	853.97336	868.70115	4.83826
Weibull	612.77496	624.77496	625.67819	640.40598	1.59176
All Fit Statistics Table					
Distribution	AD		CvM		
Normal_s	4.25257		0.75658		
Burr	4.21979*		0.71880*		
Logn	16.57630		3.13174		
Pareto	31.60773		6.84091		
Weibull	4.22441		0.71985		

This prompts for further evaluation of why the model with Burr distribution has not converged. The initial values, convergence status, and the optimization summary for the Burr distribution are shown in [Output 23.2.2](#). The initial values table indicates that the regressor X2 is redundant, which is expected. More importantly, the convergence status indicates that it requires more than 50 iterations. PROC SEVERITY enables you to change several settings of the optimizer by using the [NLOPTIONS](#) statement. In this case, you can increase the limit of 50 on the iterations, change the convergence criterion, or change the technique to something other than the default trust-region technique.

Output 23.2.2 Details of the Fitted Burr Distribution Model

The SEVERITY Procedure			
Distribution Information			
Name			Burr
Description		Burr Distribution	
Number of Distribution Parameters		3	
Number of Regression Parameters		4	
Initial Parameter Values and Bounds for Burr Distribution			
Parameter	Initial Value	Lower Bound	Upper Bound
Theta	25.75198	1.05367E-8	Infty
Alpha	2.00000	1.05367E-8	Infty
Gamma	2.00000	1.05367E-8	Infty
x1	0.07345	-709.78271	709.78271
x2	Redundant	.	.
x3	-0.14056	-709.78271	709.78271
x4	0.27064	-709.78271	709.78271
x5	-0.23230	-709.78271	709.78271
Convergence Status for Burr Distribution			
Needs more than 50 iterations.			
Optimization Summary for Burr Distribution			
Optimization Technique		Trust Region	
Number of Iterations		50	
Number of Function Evaluations		130	
Log Likelihood		-306.40430	

The following PROC SEVERITY step uses the NLOPTIONS statement to change the convergence criterion and the limits on the iterations and function evaluations, exclude the lognormal and Pareto distributions that have been confirmed previously to fit the data poorly, and exclude the redundant regressor X2 from the model:

```

/*--- Refit and compare models with higher limit on iterations ---*/
proc severity data=testnorm_reg print=all plots=pp;
  loss y;
  scalemodel x1 x3-x5;
  dist Normal_s burr weibull;
  nloptions absfconv=2.0e-5 maxiter=100 maxfunc=500;
run;

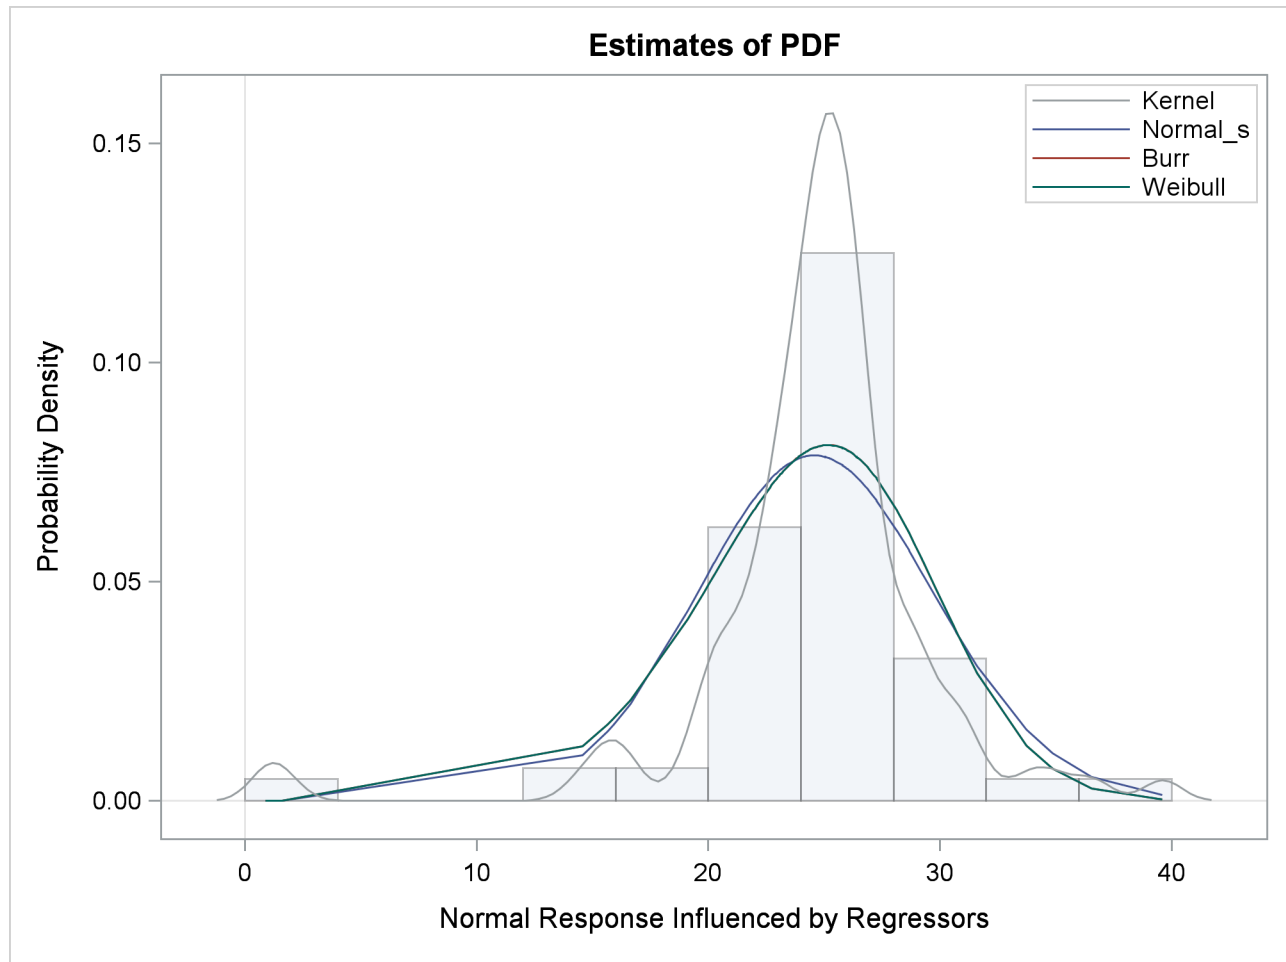
```

The results shown in [Output 23.2.3](#) indicate that the Burr distribution has now converged and that the Burr and Weibull distributions have an almost identical fit for the data. The NORMAL_S distribution is still the best distribution according to the likelihood-based criteria.

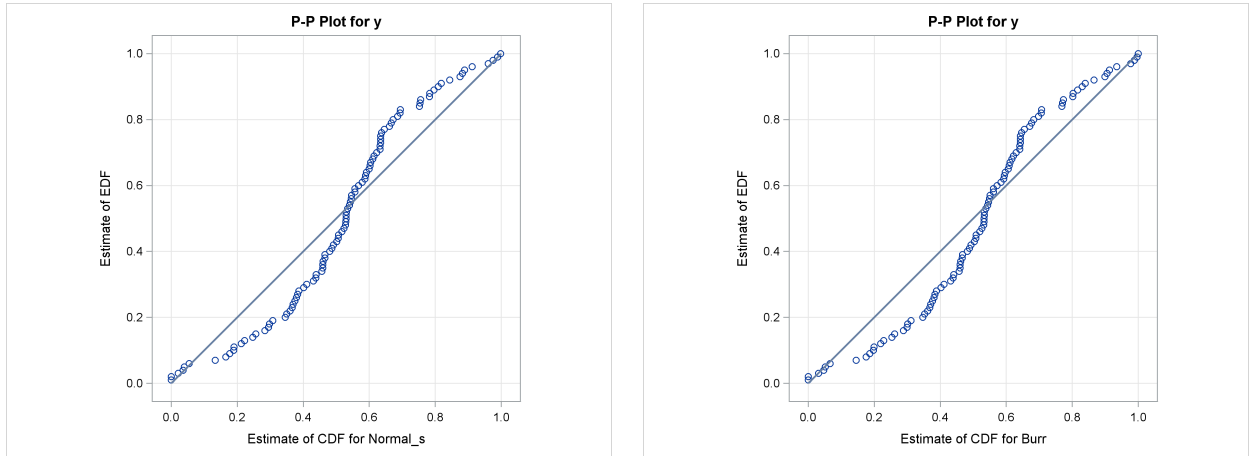
Output 23.2.3 Summary of Results after Changing Maximum Number of Iterations

The SEVERITY Procedure					
Input Data Set					
Name	WORK.TESTNORM_REG				
Model Selection Table					
Distribution	Converged	-2 Log Likelihood	Selected		
Normal_s	Yes	603.95786	Yes		
Burr	Yes	612.78605	No		
Weibull	Yes	612.77496	No		
All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
Normal_s	603.95786*	615.95786*	616.86108*	631.58888*	1.56822*
Burr	612.78605	626.78605	628.00344	645.02224	1.59154
Weibull	612.77496	624.77496	625.67819	640.40598	1.59176
All Fit Statistics Table					
Distribution	AD	CvM			
Normal_s	4.25257	0.75658			
Burr	4.22313*	0.71959*			
Weibull	4.22441	0.71985			

The comparison of the PDF estimates of all the candidates is shown in [Output 23.2.4](#). Each plotted PDF estimate is an average computed over the N PDF estimates that are obtained with the scale parameter determined by each of the N observations in the input data set. The PDF plot shows that the Burr and Weibull models result in almost identical estimates. All the estimates have a slight left skew with the mode closer to $Y=25$, which is the mean of the simulated sample.

Output 23.2.4 Comparison of EDF and CDF Estimates of the Fitted Models

The P-P plots for the Normal_s and Burr distributions are shown in [Output 23.2.5](#). These plots show how the EDF estimates compare against the CDF estimates. Each plotted CDF estimate is an average computed over the N CDF estimates that are obtained with the scale parameter determined by each of the N observations in the input data set. Comparing the P-P plots of Normal_s and Burr distributions indicates that both fit the data almost similarly, but the Burr distribution fits the right tail slightly better, which explains why the EDF-based statistics prefer it over the Normal_s distribution.

Output 23.2.5 Comparison of EDF and CDF Estimates of NORMAL_S and BURR Models**Example 23.3: Defining a Model for Mixed-Tail Distributions**

In some applications, a few severity values tend to be extreme as compared to the typical values. The extreme values represent the worst case scenarios and cannot be discarded as outliers. Instead, their distribution must be modeled to prepare for their occurrences. In such cases, it is often useful to fit one distribution to the non-extreme values and another distribution to the extreme values. The *mixed-tail* distribution mixes two distributions: one for the *body* region, which contains the non-extreme values, and another for the *tail* region, which contains the extreme values. The tail distribution is typically a generalized Pareto distribution (GPD), because it is usually good for modeling the conditional excess severity above a threshold. The body distribution can be any distribution. The following definitions are used in describing a generic formulation of a mixed-tail distribution:

$g(x)$	PDF of the body distribution
$G(x)$	CDF of the body distribution
$h(x)$	PDF of the tail distribution
$H(x)$	CDF of the tail distribution
θ	scale parameter for the body distribution
Ω	set of nonscale parameters for the body distribution
ξ	shape parameter for the GPD tail distribution
x_r	normalized value of the response variable at which the tail starts
p_n	mixing probability

Given these notations, the PDF $f(x)$ and the CDF $F(x)$ of the mixed-tail distribution are defined as

$$f(x) = \begin{cases} \frac{p_n}{G(x_b)} g(x) & \text{if } x \leq x_b \\ (1 - p_n) h(x - x_b) & \text{if } x > x_b \end{cases}$$

$$F(x) = \begin{cases} \frac{p_n}{G(x_b)} G(x) & \text{if } x \leq x_b \\ p_n + (1 - p_n)H(x - x_b) & \text{if } x > x_b \end{cases}$$

where $x_b = \theta x_r$ is the value of the response variable at which the tail starts.

These definitions indicate the following:

- The body distribution is conditional on $X \leq x_b$, where X denotes the random response variable.
- The tail distribution is the generalized Pareto distribution of the $(X - x_b)$ values.
- The probability that a response variable value belongs to the body is p_n . Consequently the probability that the value belongs to the tail is $(1 - p_n)$.

The parameters of this distribution are θ , Ω , ξ , x_r , and p_n . The scale of the GPD tail distribution θ_t is computed as

$$\theta_t = \frac{G(x_b; \theta, \Omega) (1 - p_n)}{g(x_b; \theta, \Omega) p_n} = \theta \frac{G(x_r; \theta = 1, \Omega) (1 - p_n)}{g(x_r; \theta = 1, \Omega) p_n}$$

The parameter x_r is typically estimated using a tail index estimation algorithm. One such algorithm is the Hill's algorithm (Danielsson et al. 2001), which is implemented by the predefined utility function SVRTUTIL_HILLCUTOFF available to you in the Sashelp.Svrtldist library. The algorithm and the utility function are described in detail in the section “[Predefined Utility Functions](#)” on page 1591. The function computes an estimate of x_b , which can be used to compute an estimate of x_r because $x_r = x_b / \hat{\theta}$, where $\hat{\theta}$ is the estimate of the scale parameter of the body distribution.

The parameter p_n is typically determined by the domain expert based on the fraction of losses that are expected to belong to the tail.

The following SAS statements define the LOGNGPD distribution model for a mixed-tail distribution with the lognormal distribution as the body distribution and GPD as the tail distribution:

```
/*----- Define Lognormal Body-GPD Tail Mixed Distribution -----*/
proc fcmp library=sashelp.svrtldist outlib=work.sevexmpl.models;
  function LOGNGPD_DESCRIPTION() $256;
    length desc $256;
    desc1 = "Lognormal Body-GPD Tail Distribution.";
    desc2 = " Mu, Sigma, and Xi are free parameters.";
    desc3 = " Xr and Pn are constant parameters.";
    desc = desc1 || desc2 || desc3;
    return(desc);
  endsub;

  function LOGNGPD_SCALETRANSFORM() $3;
    length xform $3;
    xform = "LOG";
    return (xform);
  endsub;

  subroutine LOGNGPD_CONSTANTPARM(Xr, Pn);
  endsub;
```

```

function LOGNGPD_PDF(x, Mu, Sigma, Xi, Xr, Pn);
    cutoff = exp(Mu) * Xr;
    p = CDF('LOGN', cutoff, Mu, Sigma);
    if (x < cutoff + constant('MACEPS')) then do;
        return ((Pn/p)*PDF('LOGN', x, Mu, Sigma));
    end;
    else do;
        gpd_scale = p*((1-Pn)/Pn)/PDF('LOGN', cutoff, Mu, Sigma);
        h = (1+Xi*(x-cutoff)/gpd_scale)**(-1-(1/Xi))/gpd_scale;
        return ((1-Pn)*h);
    end;
endsub;

function LOGNGPD_CDF(x, Mu, Sigma, Xi, Xr, Pn);
    cutoff = exp(Mu) * Xr;
    p = CDF('LOGN', cutoff, Mu, Sigma);
    if (x < cutoff + constant('MACEPS')) then do;
        return ((Pn/p)*CDF('LOGN', x, Mu, Sigma));
    end;
    else do;
        gpd_scale = p*((1-Pn)/Pn)/PDF('LOGN', cutoff, Mu, Sigma);
        H = 1 - (1 + Xi*((x-cutoff)/gpd_scale))**(-1/Xi);
        return (Pn + (1-Pn)*H);
    end;
endsub;

subroutine LOGNGPD_PARMINIT(dim, x[*], nx[*], F[*], Ftype,
                           Mu, Sigma, Xi, Xr, Pn);
    outargs Mu, Sigma, Xi, Xr, Pn;
    array xe[1] / nosymbols;
    array nxe[1] / nosymbols;

    eps = constant('MACEPS');

    Pn = 0.8; /* Set mixing probability */
    _status_ = .;
    call streaminit(56789);
    Xb = svrtutil_hillcutoff(dim, x, 100, 25, _status_);
    if (missing(_status_) or _status_ = 1) then
        Xb = svrtutil_percentile(Pn, dim, x, F, Ftype);

    /* prepare arrays for excess values */
    i = 1;
    do while (i <= dim and x[i] < Xb+eps);
        i = i + 1;
    end;
    dime = dim-i+1;
    call dynamic_array(xe, dime);
    call dynamic_array(nxe, dime);
    j = 1;
    do while(i <= dim);
        xe[j] = x[i] - Xb;
        nxe[j] = nx[i];

```



```

        i = i + 1;
        j = j + 1;
    end;

    /* Initialize lognormal parameters */
    call logn_parminit(dim, x, nx, F, Ftype, Mu, Sigma);
    if (not(missing(Mu))) then
        Xr = Xb/exp(Mu);
    else
        Xr = .;

    /* Initialize GPD's shape parameter using excess values */
    call gpd_parminit(dime, xe, nxe, F, Ftype, theta_gpd, Xi);
endsub;

subroutine LOGNGPD_LOWERBOUNDS(Mu, Sigma, Xi, Xr, Pn);
    outargs Mu, Sigma, Xi, Xr, Pn;

    Mu    = .; /* Mu has no lower bound */
    Sigma = 0; /* Sigma > 0 */
    Xi    = 0; /* Xi > 0 */
endsub;
quit;

```

The following points should be noted regarding the LOGNGPD definition:

- The parameters x_r and p_n are not estimated with the maximum likelihood method used by PROC SEVERITY, so you need to specify them as *constant* parameters by defining the [dist_CONSTANTPARM](#) subroutine. The signature of LOGNGPD_CONSTANTPARM subroutine lists only the constant parameters Xr and Pn .
- The parameter x_r is estimated by first using the SVRTUTIL_HILLCUTOFF utility function to compute an estimate of the cutoff point \hat{x}_b and then computing $x_r = \hat{x}_b / e^{\hat{\mu}}$. If SVRTUTIL_HILLCUTOFF fails to compute a valid estimate, then the SVRTUTIL_PERCENTILE utility function is used to set \hat{x}_b to the p_n th percentile of the data. The parameter p_n is fixed to 0.8.
- The Sashelp.Svrtdist library is specified with the LIBRARY= option in the PROC FCMP statement to enable the LOGNGPD_PARMINIT subroutine to use the predefined utility functions (SVRTUTIL_HILLCUTOFF and SVRTUTIL_PERCENTILE) and parameter initialization subroutines (LOGN_PARMINIT and GPD_PARMINIT).
- The LOGNGPD_LOWERBOUNDS subroutine defines the lower bounds for all parameters. This subroutine is required because the parameter Mu has a non-default lower bound. The bounds for $Sigma$ and Xi must be specified. If they are not specified, they are returned as missing values, which get interpreted as having no lower bound by PROC SEVERITY. You need not specify any bounds for the constant parameters Xr and Pn , because they are not subject to optimization.

The following DATA step statements simulate a sample from a mixed-tail distribution with a lognormal body and GPD tail. The parameter p_n is fixed to 0.8, the same value used in the LOGNGPD_PARMINIT subroutine defined previously:

```

/*----- Simulate a sample for the mixed-tail distribution -----*/
data testmixdist(keep=y label='Lognormal Body-GPD Tail Sample');
  call streaminit(45678);
  label y='Response Variable';
  N = 100;
  Mu = 1.5;
  Sigma = 0.25;
  Xi = 1.5;
  Pn = 0.8;

  /* Generate data comprising the lognormal body */
  Nbody = N*Pn;
  do i=1 to Nbody;
    y = exp(Mu) * rand('LOGNORMAL')**Sigma;
    output;
  end;

  /* Generate data comprising the GPD tail */
  cutoff = quantile('LOGNORMAL', Pn, Mu, Sigma);
  gpd_scale = (1-Pn) / pdf('LOGNORMAL', cutoff, Mu, Sigma);
  do i=Nbody+1 to N;
    y = cutoff + ((1-rand('UNIFORM'))**(-Xi) - 1)*gpd_scale/Xi;
    output;
  end;
run;

```

The following statements use PROC SEVERITY to fit the LOGNGPD distribution model to the simulated sample. They also fit three other predefined distributions (BURR, LOGN, and GPD). The final parameter estimates are written to the Work.Parmest data set.

```

/*--- Set the search path for functions defined with PROC FCMP ---*/
options cmplib=(work.sevexmpl);

/*----- Fit LOGNGPD model with PROC SEVERITY -----*/
proc severity data=testmixdist print=all plots(histogram kernel)=all
  outest=parmest;
  loss y;
  dist logngpd burr logn gpd;
run;

```

Some of the results prepared by PROC SEVERITY are shown in [Output 23.3.1](#) through [Output 23.3.4](#). The “Model Selection Table” in [Output 23.3.1](#) indicates that all models converged. The last table in [Output 23.3.1](#) shows that the model with LOGNGPD distribution has the best fit according to almost all the statistics of fit. The Burr distribution model is the closest contender to the LOGNGPD model, but the GPD distribution model fits the data very poorly.

Output 23.3.1 Summary of Fitting Mixed-Tail Distribution

The SEVERITY Procedure	
Input Data Set	
Name	WORK.TESTMIXDIST
Label	Lognormal Body-GPD Tail Sample

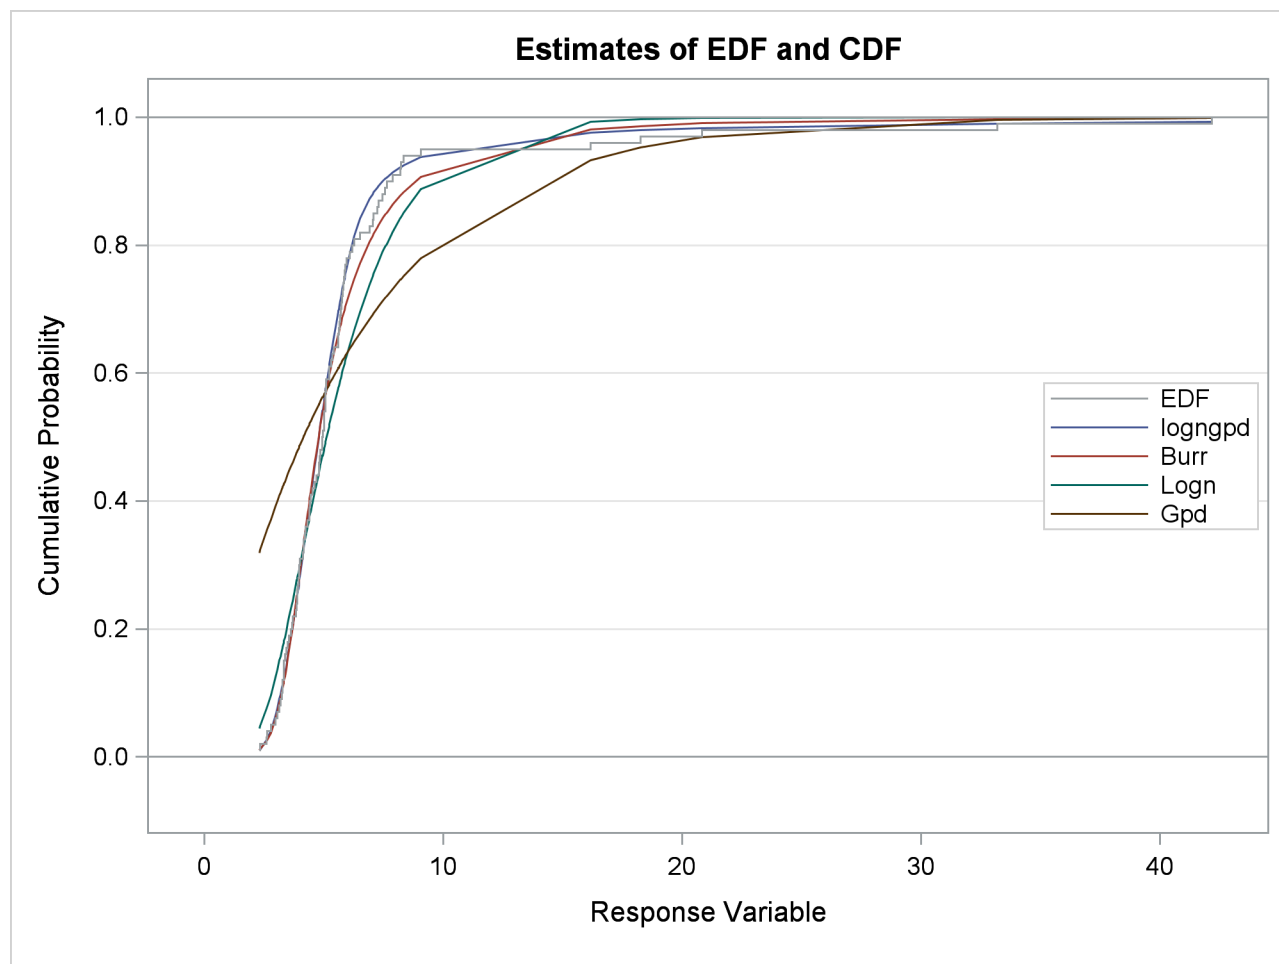
Output 23.3.1 *continued*

Model Selection Table				
Distribution	Converged	-2 Log Likelihood		Selected
logngpd	Yes	418.78232		Yes
Burr	Yes	424.93728		No
Logn	Yes	459.43471		No
Gpd	Yes	558.13444		No

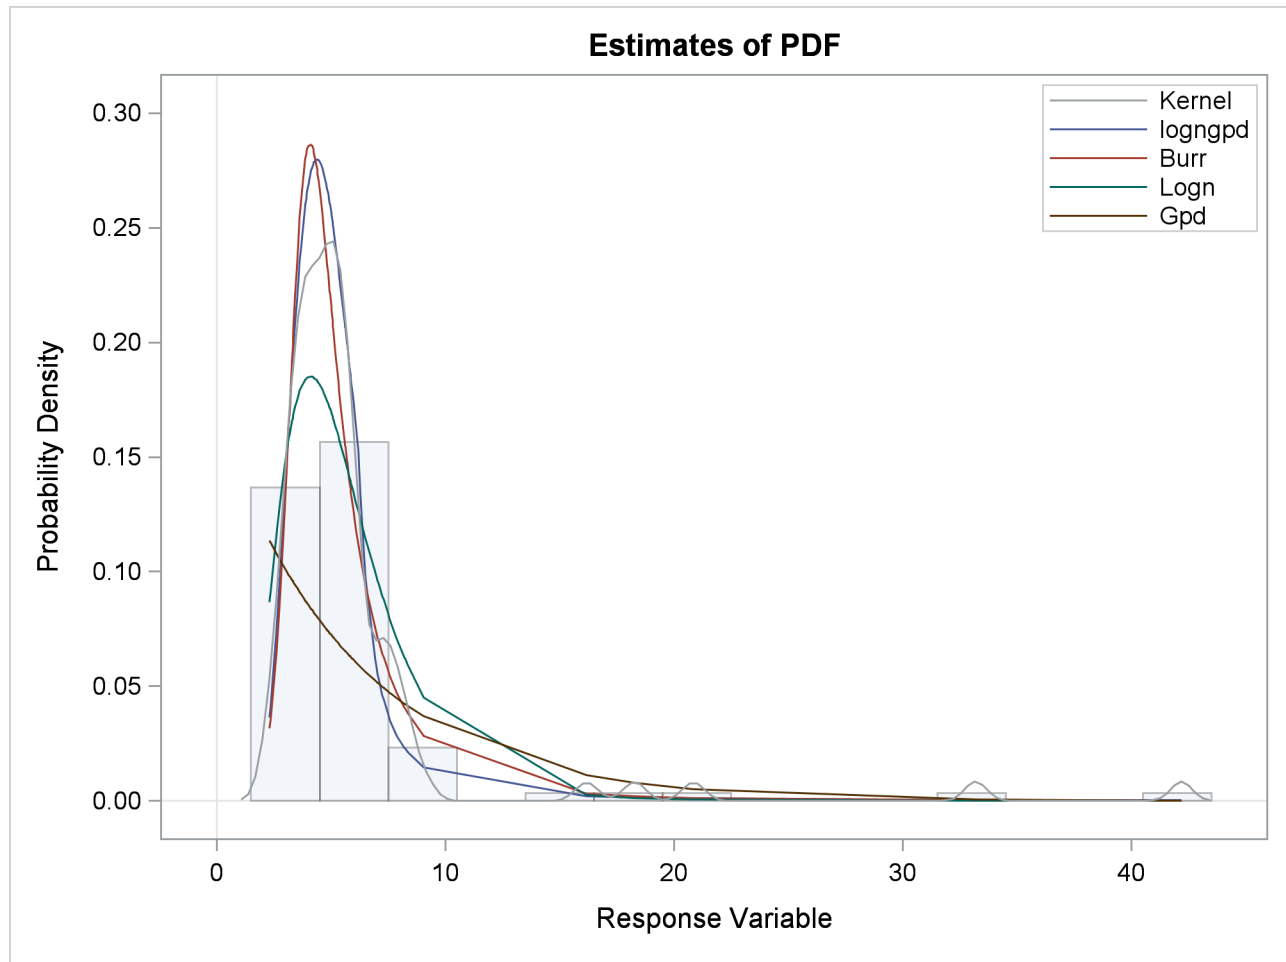
All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
logngpd	418.78232*	428.78232*	429.42062*	441.80817	0.62140*
Burr	424.93728	430.93728	431.18728	438.75280*	0.71373
Logn	459.43471	463.43471	463.55842	468.64505	1.55267
Gpd	558.13444	562.13444	562.25815	567.34478	3.43470

All Fit Statistics Table		
Distribution	AD	CvM
logngpd	0.31670*	0.04972*
Burr	0.57649	0.07860
Logn	3.27122	0.48448
Gpd	16.74156	3.31860

The plots in [Output 23.3.2](#) show that both the lognormal and GPD distributions fit the data poorly, GPD being the worst. The Burr distribution fits the data as well as the LOGNGPD distribution in the body region, but has a poorer fit in the tail region than the LOGNGPD distribution.

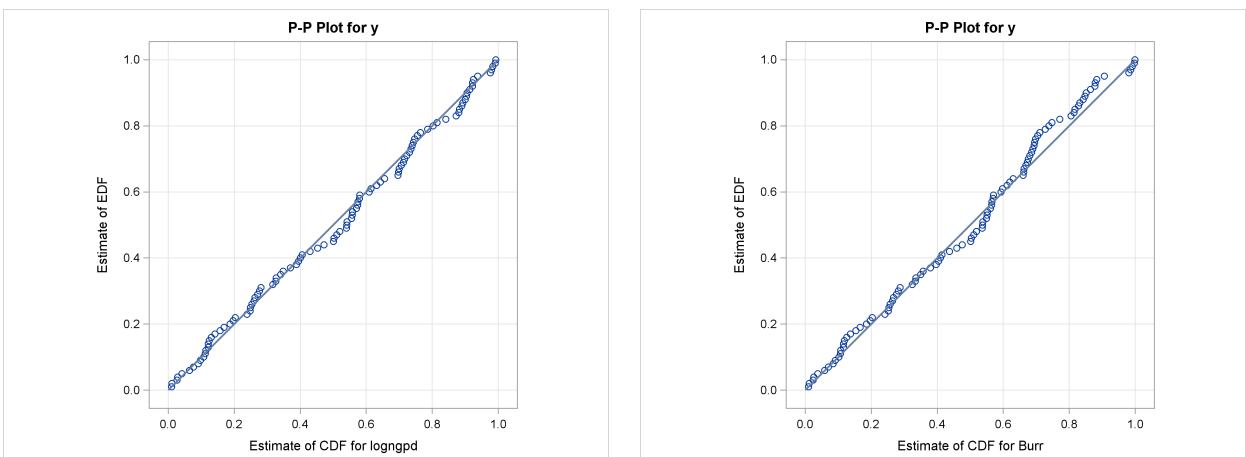
Output 23.3.2 Comparison of the CDF and PDF Estimates of the Fitted Models

Output 23.3.2 *continued*



The P-P plots of [Output 23.3.3](#) provide a better visual confirmation that the LOGNGPD distribution fits the tail region better than the Burr distribution.

Output 23.3.3 P-P Plots for the LOGNGPD and BURR Distribution Models



The detailed results for the LOGNGPD distribution are shown in [Output 23.3.4](#). The initial values table indicates the values computed by LOGNGPD_PARMINIT subroutine for the X_r and P_n parameters. It also uses the bounds columns to indicate the constant parameters. The last table in the figure shows the final parameter estimates. The estimates of all free parameters are significantly different than 0. As expected, the final estimates of the constant parameters X_r and P_n have not changed from their initial values.

Output 23.3.4 Detailed Results for the LOGNGPD Distribution

The SEVERITY Procedure				
Distribution Information				
Name	logngpd			
Description	Lognormal Body-GPD Tail Distribution. Mu, Sigma, and Xi are free parameters. Xr and Pn are constant parameters.			
Number of Distribution Parameters	5			
Initial Parameter Values and Bounds for logngpd Distribution				
Parameter	Initial Value	Lower Bound	Upper Bound	
Mu	1.49954	-Infty	Infty	
Sigma	0.76306	1.05367E-8	Infty	
Xi	0.36661	1.05367E-8	Infty	
Xr	1.27395	Constant	Constant	
Pn	0.80000	Constant	Constant	
Convergence Status for logngpd Distribution				
Convergence criterion (GCONV=1E-8) satisfied.				
Optimization Summary for logngpd Distribution				
Optimization Technique		Trust Region		
Number of Iterations		11		
Number of Function Evaluations		31		
Log Likelihood		-209.39116		
Parameter Estimates for logngpd Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Mu	1.57921	0.06426	24.57	<.0001
Sigma	0.31868	0.04459	7.15	<.0001
Xi	1.03771	0.38205	2.72	0.0078
Xr	1.27395	Constant	.	.
Pn	0.80000	Constant	.	.

The following SAS statements use the parameter estimates to compute the value where the tail region is estimated to start ($x_b = e^{\hat{\mu}} \hat{x}_r$) and the scale of the GPD tail distribution ($\theta_t = \frac{G(x_b)(1-p_n)}{g(x_b)p_n}$):

```

/*----- Compute tail cutoff and tail distribution's scale -----*/
data xb_thetat(keep=x_b theta_t);
  set parmeset(where=(_MODEL_='logngpd' and _TYPE_='EST'));
  x_b = exp(Mu) * Xr;
  theta_t = (CDF('LOGN', x_b, Mu, Sigma) / PDF('LOGN', x_b, Mu, Sigma)) *
            ((1-Pn) / Pn);
run;

proc print data=xb_thetat noobs;
run;

```

Output 23.3.5 Start of the Tail and Scale of the GPD Tail Distribution

x_b	theta_t
6.18005	1.27865

The computed values of x_b and θ_t are shown as `x_b` and `theta_t` in [Output 23.3.5](#). Equipped with this additional derived information, you can now interpret the results of fitting the mixed-tail distribution as follows:

- The tail starts at $y \approx 6.18$. The primary benefit of using the scale-normalized cutoff (x_r) as the constant parameter instead of using the actual cutoff (x_b) is that the absolute cutoff gets optimized by virtue of optimizing the scale of the body region ($\theta = e^\mu$).
- The values $y \leq 6.18$ follow the lognormal distribution with parameters $\mu \approx 1.58$ and $\sigma \approx 0.32$. These parameter estimates are reasonably close to the parameters used for simulating the sample.
- The values $y_t = y - 6.18$ ($y_t > 0$) follow the GPD distribution with scale $\theta_t \approx 1.28$ and shape $\xi \approx 1.04$.

Example 23.4: Estimating Parameters Using Cramér-von Mises Estimator

PROC SEVERITY enables you to estimate model parameters by minimizing your own objective function. This example illustrates how you can use PROC SEVERITY to implement the Cramér-von Mises estimator. Let $F(y_i; \Theta)$ denote the estimate of CDF at y_i for a distribution with parameters Θ , and let $F_n(y_i)$ denote the empirical estimate of CDF (EDF) at y_i that is computed from a sample y_i , $1 \leq i \leq N$. Then, the Cramér-von Mises estimator of the parameters is defined as

$$\hat{\Theta} = \arg \min_{\Theta} \sum_{i=1}^N (F(y_i; \Theta) - F_n(y_i))^2$$

This estimator belongs to the class of minimum distance estimators. It attempts to estimate the parameters such that the squared distance between the CDF and EDF estimates is minimized.

The following PROC SEVERITY step uses the Cramér-von Mises estimator to fit four candidate distribution models, including the LOGNGPD mixed-tail distribution model that was defined in “[Example 23.3: Defining a Model for Mixed-Tail Distributions](#)” on page 1620. The input sample is the same as is used in that example.

```
options cmplib=(work.sevexmpl);

proc severity data=testmixdist obj=cvmobj print=all plots=pp;
  loss y;
  dist logngpd burr logn gpd;

  * Cramer-von Mises estimator (minimizes the distance *
  * between parametric and nonparametric estimates)   *;
  cvmobj = _cdf_(y);
  cvmobj = (cvmobj -_edf_(y))**2;
run;
```

The OBJ= option in the PROC SEVERITY statement specifies that the objective function cvmobj should be minimized. The programming statements compute the contribution of each observation in the input data set to the objective function cvmobj. The use of keyword functions _CDF_ and _EDF_ makes the program applicable to all the distributions.

Some of the key results prepared by PROC SEVERITY are shown in [Output 23.4.1](#). The “Model Selection Table” indicates that all models converged. When you specify a custom objective function, the default selection criterion is the value of the custom objective function. The “All Fit Statistics Table” indicates that LOGNGPD is the best distribution according to all the statistics of fit. Comparing the fit statistics of [Output 23.4.1](#) with those of [Output 23.3.1](#) indicates that the use of the Cramér-von Mises estimator has resulted in smaller values for all the EDF-based statistics of fit for all the models, which is expected from a minimum distance estimator.

Output 23.4.1 Summary of Cramér-von Mises Estimation

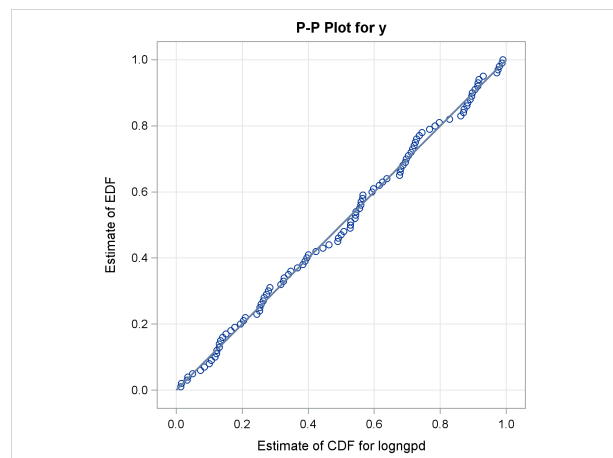
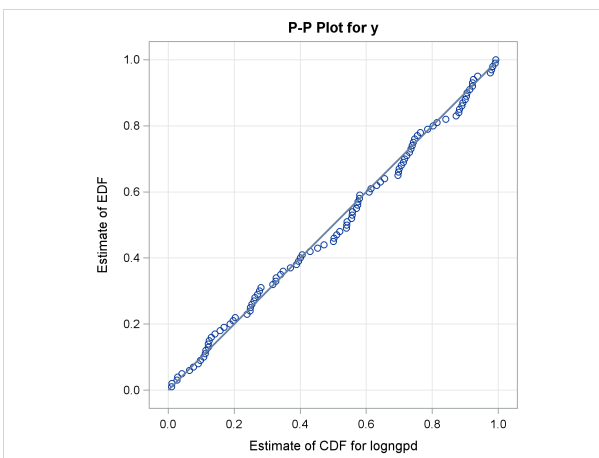
The SEVERITY Procedure			
Input Data Set			
Name	WORK.TESTMIXDIST		
Label	Lognormal Body-GPD Tail Sample		
Model Selection Table			
Distribution	Converged	Custom Objective	Selected
logngpd	Yes	0.02694	Yes
Burr	Yes	0.03325	No
Logn	Yes	0.03633	No
Gpd	Yes	2.96090	No

Output 23.4.1 *continued*

All Fit Statistics Table					
Distribution	Custom	-2 Log Likelihood	AIC	AICC	BIC
logngpd	0.02694*	419.49635*	429.49635*	430.13464*	442.52220*
Burr	0.03325	436.58823	442.58823	442.83823	450.40374
Logn	0.03633	491.88659	495.88659	496.01030	501.09693
Gpd	2.96090	560.35409	564.35409	564.47780	569.56443

All Fit Statistics Table			
Distribution	KS	AD	CvM
logngpd	0.51332*	0.21563*	0.03030*
Burr	0.53084	0.82875	0.03807
Logn	0.52469	2.08312	0.04173
Gpd	2.99095	15.51378	2.97806

The P-P plots in [Output 23.4.2](#) provide a visual confirmation that the CDF estimates match the EDF estimates more closely when compared to the estimates that are obtained with the maximum likelihood estimator.

Output 23.4.2 P-P Plots for LOGNGPD Model with Maximum Likelihood (Left) and Cramér-von Mises (Right) Estimators**Example 23.5: Fitting a Scaled Tweedie Model with Regressors**

The Tweedie distribution is often used in the insurance industry to explain the effect of independent variables (regressors) on the distribution of losses. PROC SEVERITY provides a predefined scaled Tweedie distribution (STWEEDIE) that enables you to model the regression effects on the scale parameter. The scale regression model has its own advantages such as the ability to easily account for inflation effects. This ex-

ample illustrates how that model can be used to evaluate the effect of regressors on the *mean* of the Tweedie distribution, which is useful in problems such rate-making and pure premium modeling.

Assume a Tweedie process, whose mean μ is affected by k regressors x_j , $j = 1, \dots, k$ as follows:

$$\mu = \mu_0 \exp \left(\sum_{j=1}^k \beta_j x_j \right)$$

where μ_0 represents the base value of the mean (you can think of μ_0 as $\exp(\beta_0)$, where β_0 is the intercept). This model for the mean is identical to the popular generalized linear model for the mean with a logarithmic link function. More interestingly, it parallels the model used by PROC SEVERITY for the scale parameter θ , which is as follows

$$\theta = \theta_0 \exp \left(\sum_{j=1}^k \beta_j x_j \right)$$

where θ_0 represents the base value of the scale parameter. As described in the section “[Tweedie Distributions](#)” on page 1553, for the parameter range $p \in (1, 2)$, the mean of the Tweedie distribution is given by

$$\mu = \theta \lambda \frac{2-p}{p-1}$$

where λ is the Poisson mean parameter of the scaled Tweedie distribution. This relationship enables you to use the scale regression model to infer the effect of regressors on the mean of the distribution.

Let the data set `Work.Test_Sevtw` contain a sample generated from a Tweedie distribution with dispersion parameter $\phi = 0.5$, index parameter $p = 1.75$, and the mean parameter that is affected by three regression variables `x1`, `x2`, and `x3` as follows:

$$\mu = 5 \exp(0.25 x_1 - x_2 + 3 x_3)$$

Thus, the population values of regression parameters are $\mu_0 = 5$, $\beta_1 = 0.25$, $\beta_2 = -1$, and $\beta_3 = 3$. You can find the code used to generate the sample in the PROC SEVERITY sample program `sevex05.sas`.

The following PROC SEVERITY step uses the sample in `Work.Test_Sevtw` data set to estimate the parameters of the scale regression model for the predefined scaled Tweedie distribution (STWEEDIE) with the dual quasi-Newton (QUANEW) optimization technique:

```
proc severity data=test_sevtw outest=estw covout print=all plots=none;
  loss y;
  scalemodel x1-x3;

  dist stweedie;
  nloptions tech=quanew;
run;
```

The dual quasi-Newton technique is used because it requires only the first-order derivatives of the objective function, and it is harder to compute reasonably accurate estimates of the second-order derivatives of Tweedie distribution’s PDF with respect to the parameters.

Some of the key results prepared by PROC SEVERITY are shown in [Output 23.5.1](#) and [Output 23.5.2](#). The distribution information and the convergence results are shown in [Output 23.5.1](#).

Output 23.5.1 Convergence Results for the STWEEDIE Model with Regressors

The SEVERITY Procedure	
Distribution Information	
Name	stweedie
Description	Tweedie Distribution with Scale Parameter
Number of Distribution Parameters	3
Number of Regression Parameters	3
Convergence Status for stweedie Distribution	
Convergence criterion (FCONV=2.220446E-16) satisfied.	
Optimization Summary for stweedie Distribution	
Optimization Technique	Dual Quasi-Newton
Number of Iterations	42
Number of Function Evaluations	148
Log Likelihood	-1044.3

The final parameter estimates of the STWEEDIE regression model are shown in [Output 23.5.2](#). The estimate that is reported for the parameter Theta is the estimate of the base value θ_0 . The estimates of regression coefficients β_1 , β_2 , and β_3 are indicated by the rows of x1, x2, and x3, respectively.

Output 23.5.2 Parameter Estimates for the STWEEDIE Model with Regressors

Parameter Estimates for stweedie Distribution				
Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Theta	0.82604	0.28112	2.94	0.0036
Lambda	16.43457	13.70774	1.20	0.2315
P	1.75232	0.21462	8.16	<.0001
x1	0.28000	0.09879	2.83	0.0049
x2	-0.76652	0.10319	-7.43	<.0001
x3	3.03266	0.10144	29.89	<.0001

If your goal is to explain the effect of regressors on the scale parameter, then the output displayed in [Output 23.5.2](#) is sufficient. But, if you want to compute the effect of regressors on the mean of the distribution, then some postprocessing needs to be done. Using the relationship between μ and θ , μ can be written in terms of the parameters of the STWEEDIE model as

$$\mu = \theta_0 \exp \left(\sum_{j=1}^k \beta_j x_j \right) \lambda^{\frac{2-p}{p-1}}$$

This shows that the parameters β_j are identical for the mean and the scale model, and the base value μ_0 of the mean model is

$$\mu_0 = \theta_0 \lambda \frac{2-p}{p-1}$$

The estimate of μ_0 and the standard error associated with it can be computed by using the property of the functions of maximum likelihood estimators (MLE). If $g(\Omega)$ represents a totally differentiable function of parameters Ω , then the MLE of g has an asymptotic normal distribution with mean $g(\hat{\Omega})$ and covariance $C = (\partial \mathbf{g})' \Sigma (\partial \mathbf{g})$, where $\hat{\Omega}$ is the MLE of Ω , Σ is the estimate of covariance matrix of Ω , and $\partial \mathbf{g}$ is the gradient vector of g with respect to Ω evaluated at $\hat{\Omega}$. For μ_0 , the function is $g(\Omega) = \theta_0 \lambda (2-p)/(p-1)$. The gradient vector is

$$\begin{aligned} \partial \mathbf{g} &= \left(\frac{\partial g}{\partial \theta_0} \quad \frac{\partial g}{\partial \lambda} \quad \frac{\partial g}{\partial p} \quad \frac{\partial g}{\partial \beta_1} \cdots \frac{\partial g}{\partial \beta_k} \right) \\ &= \left(\frac{\mu_0}{\theta_0} \quad \frac{\mu_0}{\lambda} \quad \frac{-\mu_0}{(p-1)(2-p)} \quad 0 \dots 0 \right) \end{aligned}$$

You can write a DATA step that implements these computations by using the parameter and covariance estimates prepared by PROC SEVERITY step. The DATA step program is available in the sample program *sevex05.sas*. The estimates of μ_0 prepared by that program are shown in [Output 23.5.3](#). These estimates and the estimates of β_j as shown in [Output 23.5.2](#) are reasonably close (that is, within one or two standard errors) to the parameters of the population from which the sample in *Work.Test_Sevtw* data set was drawn.

Output 23.5.3 Estimate of the Base Value Mu0 of the Mean Parameter

Parameter	Estimate	Standard Error	t Value	Approx Pr > t
Mu0	4.46928	0.42225	10.5845	0

Another effect of using the scaled Tweedie distribution to model the regression effects is that the regressors also affect the variance V of the Tweedie distribution. The variance is related to the mean as $V = \phi \mu^p$, where ϕ is the dispersion parameter. Using the relationship between the parameters TWEEDIE and STWEEDIE distributions as described in the section “[Tweedie Distributions](#)” on page 1553, the regression model for the dispersion parameter is

$$\begin{aligned} \log(\phi) &= (2-p) \log(\mu) - \log(\lambda(2-p)) \\ &= ((2-p)\mu_0 - \log(\lambda(2-p))) + (2-p) \sum_{j=1}^k \beta_j x_j \end{aligned}$$

Subsequently, the regression model for the variance is

$$\begin{aligned} \log(V) &= 2 \log(\mu) - \log(\lambda(2-p)) \\ &= (2\mu_0 - \log(\lambda(2-p))) + 2 \sum_{j=1}^k \beta_j x_j \end{aligned}$$

In summary, PROC SEVERITY enables you to estimate regression effects on various parameters and statistics of the Tweedie model.

Example 23.6: Fitting Distributions to Interval-Censored Data

In some applications, the data available for modeling might not be exact. A commonly encountered scenario is the use of grouped data from an external agency, which for several reasons, including privacy, does not provide information about individual loss events. The losses are grouped into disjoint bins, and you know only the range and number of values in each bin. Each group is essentially interval-censored, because you know that a loss magnitude is in certain interval, but you do not know the exact magnitude. This example illustrates how you can use PROC SEVERITY to model such data.

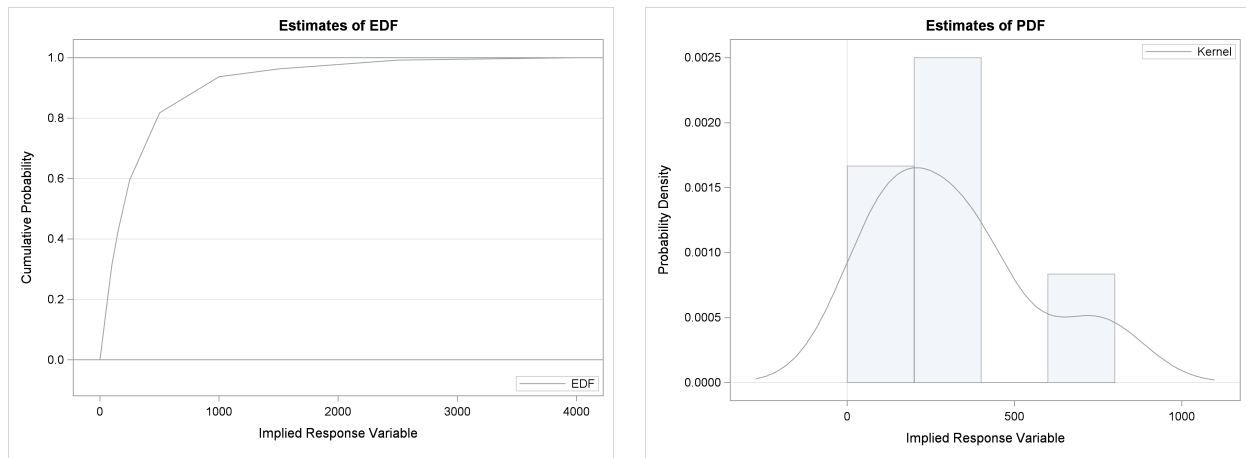
The following DATA step generates sample grouped data for dental insurance claims, which is taken from Klugman, Panjer, and Willmot (1998).

```
/* Grouped dental insurance claims data
   (Klugman, Panjer, and Willmot, 1998) */
data gdental;
    input lowerbd upperbd count @@;
    datalines;
0 25 30 25 50 31 50 100 57 100 150 42 150 250 65 250 500 84
500 1000 45 1000 1500 10 1500 2500 11 2500 4000 3
;
run;
```

Often, when you do not know the nature of the data, it is recommended that you first explore the nature of the sample distribution by examining the nonparametric estimates of PDF and CDF. The following PROC SEVERITY step prepares the nonparametric estimates, but it does not fit any distribution because there is no DIST statement specified:

```
/* Prepare nonparametric estimates */
proc severity data=gdental print=all plots(histogram kernel)=all;
    loss / rc=lowerbd lc=upperbd;
    weight count;
run;
```

The LOSS statement specifies the left and right boundary of each group as the right-censoring and left-censoring limits, respectively. The variable count records the number of losses in each group and is specified in the WEIGHT statement. Note that there is no response or loss variable specified in the LOSS statement, which is allowed as long as each observation in the input data set is censored. The nonparametric estimates prepared by this step are shown in [Output 23.6.1](#). The histogram, kernel density, and EDF plots all indicate that the data is heavy-tailed. For interval-censored data, PROC SEVERITY uses Turnbull's algorithm to compute the EDF estimates. The plot of Turnbull's EDF estimates is shown to be linear between the endpoints of a censored group. The linear relationship is chosen for convenient visualization and ease of computation of EDF-based statistics, but you should note that theoretically the behavior of Turnbull's EDF estimates is undefined within a group.

Output 23.6.1 Nonparametric Distribution Estimates for Interval-Censored Data

With the PRINT=ALL option, PROC SEVERITY prints the summary of the Turnbull EDF estimation process as shown in [Output 23.6.2](#). It indicates that the final EDF estimates have converged and are in fact maximum likelihood (ML) estimates. If they were not ML estimates, then you could have used the [ENSUREMLE](#) option to force the algorithm to search for ML estimates.

Output 23.6.2 Turnbull EDF Estimation Summary for Interval-Censored Data

Turnbull EDF Estimation Summary	
Technique	EM with Maximum Likelihood Check
Convergence Status	Converged
Number of Iterations	2
Maximum Absolute Relative Error	1.8406E-16
Maximum Absolute Reduced Gradient	1.7764E-15
Estimates	Maximum Likelihood

After exploring the nature of the data, you can now fit a set of heavy-tailed distributions to this data. The following PROC SEVERITY step fits all the predefined distributions to the data in Work.Gdental data set:

```

/* Fit all predefined distributions */
proc severity data=gdental print=all plots(histogram kernel)=all
    criterion=ad;
    loss / rc=lowerbd lc=upperbd;
    weight count;
    dist _predef_;
run;

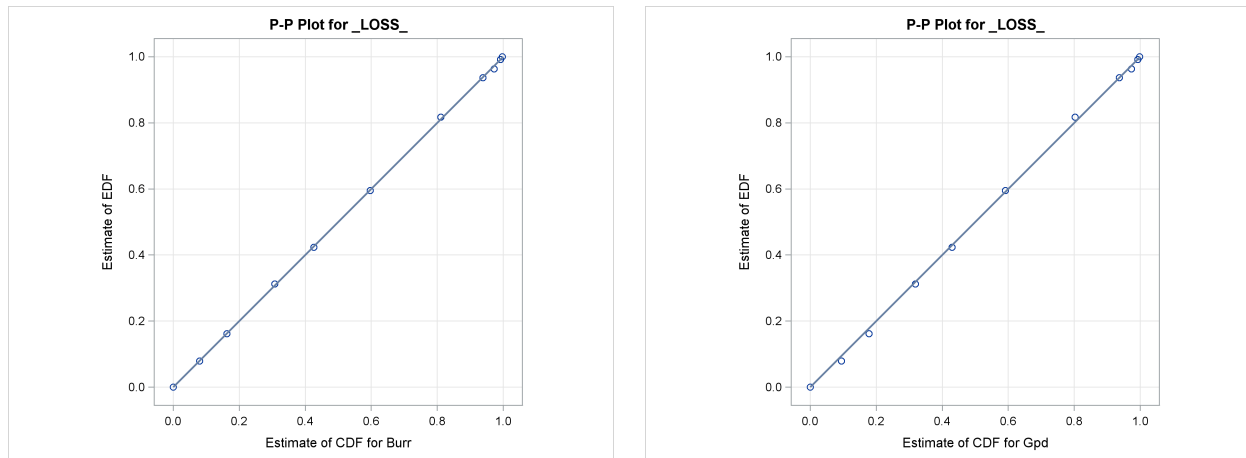
```

Some of the key results prepared by PROC SEVERITY are shown in [Output 23.6.3](#) through [Output 23.6.4](#). According to the “Model Selection Table” in [Output 23.6.3](#), all distribution models have converged. The “All Fit Statistics Table” in [Output 23.6.3](#) indicates that the generalized Pareto distribution (GPD) has the best fit for data according to a majority of the likelihood-based statistics and that the Burr distribution (BURR) has the best fit according to all the EDF-based statistics.

Output 23.6.3 Statistics of Fit for Interval-Censored Data

The SEVERITY Procedure					
Input Data Set					
Name		WORK.GDENTAL			
Model Selection Table					
Distribution	Converged	Anderson-Darling Statistic	Selected		
Burr	Yes	0.00103	Yes		
Exp	Yes	0.09936	No		
Gamma	Yes	0.04608	No		
Igauss	Yes	0.12301	No		
Logn	Yes	0.01884	No		
Pareto	Yes	0.00739	No		
Gpd	Yes	0.00739	No		
Weibull	Yes	0.03293	No		
All Fit Statistics Table					
Distribution	-2 Log Likelihood	AIC	AICC	BIC	KS
Burr	41.41112*	47.41112	51.41112	48.31888	0.08974*
Exp	42.14768	44.14768*	44.64768*	44.45026*	0.26412
Gamma	41.92541	45.92541	47.63969	46.53058	0.19569
Igauss	42.34445	46.34445	48.05874	46.94962	0.34514
Logn	41.62598	45.62598	47.34027	46.23115	0.16853
Pareto	41.45480	45.45480	47.16908	46.05997	0.11423
Gpd	41.45480	45.45480	47.16908	46.05997	0.11423
Weibull	41.76272	45.76272	47.47700	46.36789	0.17238
All Fit Statistics Table					
Distribution	AD	CvM			
Burr	0.00103*	0.0000816*			
Exp	0.09936	0.01866			
Gamma	0.04608	0.00759			
Igauss	0.12301	0.02562			
Logn	0.01884	0.00333			
Pareto	0.00739	0.0009084			
Gpd	0.00739	0.0009084			
Weibull	0.03293	0.00472			

The P-P plots of [Output 23.6.4](#) show that both GPD and BURR have a close fit between EDF and CDF estimates, although BURR has slightly better fit, which is also indicated by the EDF-based statistics. Given that BURR is a generalization of the GPD and that the plots do not offer strong evidence in support of the more complex distribution, GPD seems like a good choice for this data.

Output 23.6.4 P-P Plots of Burr and GPD for Interval-Censored Data

References

- D'Agostino, R. and Stephens, M. (1986), *Goodness-of-Fit Techniques*, New York: Marcel Dekker, Inc.
- Danielsson, J., De Haan, L., Peng, L., and de Vries, C. G. (2001), "Using a Bootstrap Method to Choose the Sample Fraction in Tail Index Estimation," *Journal of Multivariate Analysis*, 76, 226–248.
- Dunn, P. K. and Smyth, G. K. (2005), "Series Evaluation of Tweedie Exponential Dispersion Model Densities," *Statistics and Computing*, 15(4), 267–280.
- Frydman, H. (1994), "A Note on Nonparametric Estimation of the Distribution Function from Interval-Censored and Truncated Observations," *Journal of Royal Statistical Society, Series B*, 56(1), 71–74.
- Gentleman, R. and Geyer, C. J. (1994), "Maximum Likelihood for Interval Censored Data: Consistency and Computation," *Biometrika*, 81(3), 618–623.
- Hill, B. M. (1975), "A Simple General Approach to Inference about the Tail of a Distribution," *Annals of Statistics*, 3(5), 1163–1174.
- Jørgensen, B. (1987), "Exponential Dispersion Models (with discussion)," *Journal of Royal Statistical Society, Series B*, 49(2), 127–162.
- Kaplan, E. L. and Meier, P. (1958), "Nonparametric Estimation from Incomplete Observations," *Journal of American Statistical Association*, 53, 457–481.
- Klein, J. P. and Moeschberger, M. L. (1997), *Survival Analysis: Techniques for Censored and Truncated Data*, New York: Springer-Verlag.
- Klugman, S. A., Panjer, H. H., Willmot, G. E. (1998), *Loss Models: From Data to Decisions*, New York: John Wiley & Sons.

- Koziol, J. A. and Green, S. B. (1976), "A Cramér-von Mises Statistic for Randomly Censored Data," *Biometrika*, 63, 466–474.
- Lai, T. L. and Ying, Z. (1991), "Estimating A Distribution Function with Truncated and Censored Data," *Annals of Statistics*, 19(1), 417–442.
- Lynden-Bell, D. (1971), "A Method of Allowing for Known Observational Selection in Small Samples Applied to 3CR Quasars," *Monthly Notices of the Royal Astronomical Society*, 155, 95–118.
- Turnbull, B. W. (1976), "The Empirical Distribution Function with Arbitrarily Grouped, Censored, and Truncated Data," *Journal of Royal Statistical Society, Series B*, 38, 290–295.
- Tweedie, M. C. K. (1984), "An Index Which Distinguishes between Some Important Exponential Families," *Statistics: Applications and New Directions, Proceedings of the Indian Statistical Institute Golden Jubilee International Conference*, J. K. Ghosh and J. Roy (Eds.), 579–604.

Chapter 24

The SIMILARITY Procedure

Contents

Overview: SIMILARITY Procedure	1642
Getting Started: SIMILARITY Procedure	1644
Syntax: SIMILARITY Procedure	1646
Functional Summary	1646
PROC SIMILARITY Statement	1648
BY Statement	1650
FCMPOPT Statement	1651
ID Statement	1651
INPUT Statement	1654
TARGET Statement	1656
Details: SIMILARITY Procedure	1661
Accumulation	1662
Missing Value Interpretation	1664
Zero Value Interpretation	1664
Time Series Transformation	1665
Time Series Differencing	1665
Time Series Missing Value Trimming	1666
Time Series Descriptive Statistics	1666
Input and Target Sequences	1666
Sliding Sequences	1666
Time Warping	1667
Sequence Normalization	1667
Sequence Scaling	1667
Similarity Measures	1668
User-Defined Functions and Subroutines	1668
Output Data Sets	1676
OUT= Data Set	1676
OUTMEASURE= Data Set	1676
OUTPATH= Data Set	1677
OUTSEQUENCE= Data Set	1678
OUTSUM= Data Set	1679
STATUS Variable Values	1680
Printed Output	1680
ODS Table Names	1681

ODS Graphics	1682
Examples: SIMILARITY Procedure	1684
Example 24.1: Accumulating Transactional Data into Time Series Data	1684
Example 24.2: Similarity Analysis	1686
Example 24.3: Sliding Similarity Analysis	1703
Example 24.4: Searching for Historical Analogies	1705
Example 24.5: Clustering Time Series	1708
References	1708

Overview: SIMILARITY Procedure

The SIMILARITY procedure computes similarity measures associated with time-stamped data, time series, and other sequentially ordered numeric data. PROC SIMILARITY computes similarity measures for time-stamped transactional data (transactions) with respect to time by accumulating the data into a time series format, and it computes similarity measures for sequentially ordered numeric data (sequences) by respecting the ordering of the data.

Given two ordered numeric sequences (input and target), a similarity measure is a metric that measures the distance between the input and target sequences while taking into account the ordering of the data. The SIMILARITY procedure computes similarity measures between an input sequence and a target sequence, in addition to similarity measures that “slide” the target sequence with respect to the input sequence. The “slides” can be by observation index (sliding-sequence similarity measures) or by seasonal index (seasonal-sliding-sequence similarity measures).

In order to compare the raw input and the raw target time-stamped data, the raw data must be accumulated to a time series format. After the input and target time series are formed, the two accumulated time series can be compared as two ordered numeric sequences.

For raw time-stamped data, after the transactional data are accumulated to form time series and any missing values are interpreted, each accumulated time series can be functionally transformed, if desired. Transformations are useful when you want to stabilize the time series before computing the similarity measures. Transformations performed by the SIMILARITY procedure include the following:

- log (LOG)
- square-root (SQRT)
- logistic (LOGISTIC)
- Box-Cox (BOXCOX)
- user-defined transformations

Each time series can be transformed further by using simple differencing or seasonal differencing or both. Additional time series transformations can be performed by using various time series transformation and analysis techniques provided by this procedure or other SAS/ETS procedures.

After optionally transforming each time series, the accumulated and transformed time series can be stored in an output data set (OUT= data set).

After optional accumulation and transformation, each of these time series are the “working series,” which can now be analyzed as sequences of numeric data. Each of these sequences can be a target sequence, an input sequence, or both a target and an input sequence. Throughout the remainder of this chapter, the term “original sequence” applies to both the original input and target sequence. The term “working sequence” applies to a version of both the original input and target sequence under investigation.

Each original sequence can be normalized prior to similarity analysis. Normalizations are useful when you want to compare the “shape” or “profile” of the time series. Normalizations performed by the SIMILARITY procedure include the following:

- standard (STANDARD)
- absolute (ABSOLUTE)
- user-defined normalizations

After each original sequence is optionally normalized, each working input sequence can be scaled to the target sequence prior to similarity analysis. Scaling is useful when you want to compare the input sequence to the target sequence while discounting the variation of the target sequence. Input sequence scaling performed by the SIMILARITY procedure include the following:

- standard (STANDARD)
- absolute (ABSOLUTE)
- user-defined scaling

After the working input sequence is optionally scaled to the target sequence, similarity measures can be computed. Similarity measures computed by the SIMILARITY procedure include:

- squared deviation (SQRDEV)
- absolute deviation (ABSDEV)
- mean square deviation (MSQRDEV)
- mean absolute deviation (MABSDEV)
- user-defined similarity measures

In computing the similarity measure between two time series, tasks are needed for transforming time series, normalizing sequences, scaling sequences, and computing metrics or measures. The SIMILARITY procedure provides built-in routines to perform these tasks. The SIMILARITY procedure also enables you to extend the procedure with user-defined routines.

All results of the similarity analysis can be stored in output data sets, printed, or graphed using the Output Delivery System (ODS).

The SIMILARITY procedure can process large amounts of time-stamped transactional data, time series, or sequential data. Therefore, the analysis results are useful for large-scale time series analysis, analogous time series forecasting, new product forecasting, or time series (temporal) data mining.

The SAS/ETS EXPAND procedure can be used for frequency conversion and transformations of time series. The TIMESERIES procedure can be used for large-scale time series analysis. The SAS/STAT DISTANCE procedure can be used to compute various measures of distance, dissimilarity, or similarity between observations (rows) of a SAS data set.

Getting Started: SIMILARITY Procedure

This section outlines the use of the SIMILARITY procedure and gives a cursory description of some of the analysis techniques that can be performed on time-stamped transactional data, time series, or sequentially ordered numeric data.

Given an input data set that contains numerous transaction variables recorded over time at no specific frequency, the SIMILARITY procedure can form equally spaced input and target time series as follows:

```
PROC SIMILARITY DATA=<input-data-set>
                OUT=<output-data-set>
                OUTSUM=<summary-data-set>;
  ID <time-ID-variable> INTERVAL=<frequency>
    ACCUMULATE=<statistic>;
  INPUT <input-time-stamp-variables>;
  TARGET <target-time-stamp-variables>;
RUN;
```

The SIMILARITY procedure forms time series from the input time-stamped transactional data. It can provide results in output data sets or in other output formats using the Output Delivery System (ODS). The examples in this section are more fully illustrated in the section “[Examples: SIMILARITY Procedure](#)” on page 1684.

Time-stamped transactional data are often recorded at no fixed interval. Analysts often want to use time series analysis techniques that require fixed-time intervals. Therefore, the transactional data must be accumulated to form a fixed-interval time series.

Suppose that a bank wants to analyze the transactions that are associated with each of its customers over time. Further, suppose that the data set WORK.TRANSACTIONS contains three variables that are related

to the customer transactions (CUSTOMER, DATE, and WITHDRAWAL) and one variable that contains an example fraudulent behavior (FRAUD).

The following statements illustrate how to use the SIMILARITY procedure to accumulate time-stamped transactional data to form a daily time series based on the accumulated daily totals of each type of transaction (WITHDRAWALS and FRAUD):

```
proc similarity data=transactions out=timedata;
  by customer;
  id date interval=day accumulate=total;
  input withdrawals;
  target fraud;
run;
```

The OUT=TIMEDATA option specifies that the resulting time series data for each customer are to be stored in the data set WORK.TIMEDATA. The INTERVAL=DAY option specifies that the transactions are to be accumulated on a daily basis. The ACCUMULATE=TOTAL option specifies that the sum of the transactions are to be accumulated. After the transactional data are accumulated into a time series format, the time series data can be normalized so that the “shape” or “profile” is analyzed.

For example, the following statements build on the previous statements and demonstrate normalization of the accumulated time series:

```
proc similarity data=transactions out=timedata;
  by customer;
  id date interval=day accumulate=total;
  input withdrawals / NORMALIZE=STANDARD;
  target fraud      / NORMALIZE=STANDARD;
run;
```

The NORMALIZE=STANDARD option specifies that each accumulated time series observation is normalized by subtracting the mean and then dividing by the standard deviation of the accumulated time series. The WORK.TIMEDATA data set now contains the accumulated and normalized time series data for each customer.

After the transactional data are accumulated into a time series format and normalized to a mean of zero and standard deviation of one, similarity analysis can be performed on the accumulated and normalized time series.

For example, the following statements build on the previous statements and demonstrate similarity analysis of the accumulated and normalized time series:

```
proc similarity data=transactions
               out=timedata OUTSUM=SUMMARY;
  by customer;
  id date interval=day accumulate=total;
  input withdrawals / normalize=standard;
  target fraud      / normalize=standard MEASURE=MABSDEV;
run;
```

The MEASURE=MABSDEV option specifies the accumulated and normalized time series data that are associated with the variables WITHDRAWALS and FRAUD are to be compared by using mean absolute deviation. The OUTSUM=SUMMARY option specifies that the similarity analysis summary for each customer is to be stored in the data set WORK.SUMMARY.

Syntax: SIMILARITY Procedure

The following statements are used with the SIMILARITY procedure.

```
PROC SIMILARITY options ;
  BY variables ;
  ID variable INTERVAL= interval options ;
  FCMPOPT options ;
  INPUT variable-list / options ;
  TARGET variable-list / options ;
```

Functional Summary

The statements and options that control the SIMILARITY procedure are summarized in the following table.

Table 24.1 SIMILARITY Functional Summary

Description	Statement	Option
Statements		
Specifies BY-group processing	BY	
Specifies the time ID variable	ID	
Specifies the FCMP options	FCMPOPT	
Specifies input variables to analyze	INPUT	
Specifies target variables to analyze	TARGET	
Data Set Options		
Specifies the input data set	PROC SIMILARITY	DATA=
Specifies the time series output data set	PROC SIMILARITY	OUT=
Specifies the measure summary output data set	PROC SIMILARITY	OUTMEASURE=
Specifies the path output data set	PROC SIMILARITY	OUTPATH=
Specifies the sequence output data set	PROC SIMILARITY	OUTSEQUENCE=
Specifies the summary output data set	PROC SIMILARITY	OUTSUM=
User-Defined Functions and Subroutine Options		
Specifies FCMP quiet mode	FCMPOPT	QUIET=
Specifies FCMP trace mode	FCMPOPT	TRACE=

Description	Statement	Option
Accumulation and Seasonality Options		
Specifies the accumulation frequency	ID	INTERVAL=
Specifies the length of seasonal cycle	PROC SIMILARITY	SEASONALITY=
Specifies the interval alignment	ID	ALIGN=
Specifies that the time ID variable values are not sorted	ID	NOTSORTED
Specifies the starting time ID value	ID	START=
Specifies the ending time ID value	ID	END=
Specifies the accumulation statistic	ID, INPUT, TARGET	ACCUMULATE=
Specifies the missing value interpretation	ID, INPUT, TARGET	SETMISS=
Specifies the zero value interpretation	ID, INPUT, TARGET	ZEROMISS=
Specifies the type of missing value trimming	INPUT, TARGET	TRIMMISS=
Time Series Transformation Options		
Specifies simple differencing	INPUT, TARGET	DIF=
Specifies seasonal differencing	INPUT, TARGET	SDIF=
Specifies the transformation	INPUT, TARGET	TRANSFORM=
Input Sequence Options		
Specifies normalization	INPUT	NORMALIZE=
Specifies scaling	INPUT	SCALE=
Target Sequence Options		
Specifies normalization	TARGET	NORMALIZE=
Similarity Measure Options		
Specifies the compression limits	TARGET	COMPRESS=
Specifies the expansion limits	TARGET	EXPAND=
Specifies the similarity measure	TARGET	MEASURE=
Specifies the similarity measure and path	TARGET	PATH=
Specifies the sequence slide	TARGET	SLIDE=
Printing and Graphical Control Options		
Specifies the time ID format	ID	FORMAT=
Specifies printed output	PROC SIMILARITY	PRINT=
Specifies detailed printed output	PROC SIMILARITY	PRINTDETAILS
Specifies graphical output	PROC SIMILARITY	PLOTS=
Miscellaneous Options		
Specifies that analysis variables are processed in ascending order	PROC SIMILARITY	SORTNAMES
Specifies the ordering of the processing of the input and target variables	PROC SIMILARITY	ORDER=

PROC SIMILARITY Statement

PROC SIMILARITY *options* ;

The following options can be used in the PROC SIMILARITY statement.

DATA=SAS-data-set

names the SAS data set that contains the time series, transactional, or sequence input data for the procedure. If the DATA= option is not specified, the most recently created SAS data set is used.

ORDER=order-option

specifies the order in which the variables listed in the INPUT and TARGET statements are to be processed. This ordering affects the OUTSEQUENCE=, OUTPATH=, OUTMEASURE=, and OUTSUM= data sets, in addition to the printed and graphical output. The SORTNAMES option also affects the ordering of the analysis. You must specify one of the following *order-options*:

INPUT	specifies that each INPUT variable be processed and then the TARGET variables be processed. The results are stored and printed based only on the INPUT variables.
INPUTTARGET	specifies that each INPUT variable be processed and then the TARGET variables be processed. The results are stored and printed based on both the INPUT and TARGET variables. This is the default.
TARGET	specifies that each TARGET variable be processed and then the INPUT variables be processed. The results are stored and printed based only on the TARGET variables.
TARGETINPUT	specifies that each TARGET variable be processed and then the INPUT variables be processed. The results are stored and printed based on both the TARGET and INPUT variables.

OUT=SAS-data-set

names the output data set to contain the time series variables specified in the subsequent INPUT and TARGET statements. If an ID variable is specified in the ID statement, it is also included in the OUT= data set. The values are accumulated based on the ID statement INTERVAL= option or the ACCUMULATE= options or both. The values are transformed based on the INPUT or TARGET statement TRANSFORM=, DIF=, and SDIF= options in this order. The OUT= data set is particularly useful when you want to further analyze, model, or forecast the resulting time series with other SAS/ETS procedures.

OUTMEASURE=SAS-data-set

names the output data set to contain the detailed similarity measures by time ID value. The form of the OUTMEASURE= data set is determined by the PROC SIMILARITY statement SORTNAMES and ORDER= options.

OUTPATH=SAS-data-set

names the output data set to contain the path used to compute the similarity measures for each slide and warp. The form of the OUTPATH= data set is determined by the PROC SIMILARITY statement

SORTNAMES and ORDER= options. If a user-defined similarity measure is specified, the path cannot be determined; therefore, the OUTPATH= data set does not contain information related to this measure.

OUTSEQUENCE=SAS-data-set

names the output data set to contain the sequences used to compute the similarity measures for each slide and warp. The form of the OUTSEQUENCE= data set is determined by the PROC SIMILARITY statement SORTNAMES and ORDER= options.

OUTSUM=SAS-data-set

names the output data set to contain the similarity measure summary. The OUTSUM= data set is particularly useful when analyzing large numbers of series and only the summary of the results are needed. The form of the OUTSUM= data set is determined by the PROC SIMILARITY statement SORTNAMES and ORDER= options.

PLOTS=option

PLOTS=(options ...)

specifies the graphical output desired. To specify multiple *options*, separate them by spaces and enclose the group in parentheses. By default, the SIMILARITY procedure produces no graphical output. The following graphical *options* are available:

COSTS	plots graphics for time warp costs.
DISTANCES	plots graphics for similarity absolute and relative distances (OUTPATH= data set).
INPUTS	plots graphics for input variable time series (OUT= data set).
MAPS	plots graphics for time warp maps (OUTPATH= data set).
MEASURES	plots graphics for similarity measures (OUTMEASURE= data set).
NORMALIZED	plots graphics for both the input and target variable normalized sequence. These plots are displayed only when the INPUT or TARGET statement NORMALIZE= option is specified.
PATHS	plots time warp paths graphics (OUTPATH= data set).
SCALED	plots graphics for both the input variable scaled sequence. These plots are displayed only when the INPUT statement SCALE= option is specified.
SEQUENCES	plots graphics for both the input and target variable sequence (OUTSEQUENCE= data set).
TARGETS	plots graphics for the target variable time series (OUT= data set).
WARPS	plots graphics for time warps (OUTPATH= data set).
ALL	is the same as PLOTS=(INPUTS TARGETS SEQUENCES NORMALIZED SCALED DISTANCES PATHS MAPS WARPS COST MEASURES).

PRINT=option

PRINT=(options ...)

specifies the printed output desired. To specify multiple *options*, separate them by spaces and enclose the group in parentheses. By default, the SIMILARITY procedure produces no printed output. The following printing options are available:

DESCSTATS	prints the descriptive statistics for the working time series.
PATHS	prints the path statistics table. If a user-defined similarity measure is specified, the path cannot be determined; therefore, the PRINT=PATHS table is not printed for this measure.
COSTS	prints the cost statistics table.
WARPS	prints the warp summary table.
SLIDES	prints the slides summary table.
SUMMARY	prints the similarity measure summary table.
ALL	is the same as PRINT=(DESCSTATS PATHS COSTS WARPS SLIDES SUMMARY).

PRINTDETAILS

specifies that the output requested with the PRINT= option be printed in greater detail.

SEASONALITY=*integer*

specifies the length of the seasonal cycle where *integer* ranges from one to 10,000. For example, SEASONALITY=3 means that every group of three time periods forms a seasonal cycle. By default, the length of the seasonal cycle is 1 (no seasonality) or the length implied by the INTERVAL= option specified in the ID statement. For example, INTERVAL=MONTH implies that the length of the seasonal cycle is 12.

SORTNAMES

specifies that the variables specified in the INPUT and TARGET statements be processed in alphabetical order of the variable names. By default, the SIMILARITY procedure processes the variables in the order in which they are listed. The ORDER= option also affects the ordering in which the analysis is performed.

BY Statement

A BY statement can be used with PROC SIMILARITY to obtain separate dummy variable definitions for groups of observations defined by the BY variables.

When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the option NOTSORTED or DESCENDING in the BY statement for the SIMILARITY procedure. The NOTSORTED option does not mean that the data are unsorted, but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables by using the DATASETS procedure.

For more information about the BY-group processing, see *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

FCMPOPT Statement

FCMPOPT *options* ;

The FCMPOPT statement specifies the following *options* that are related to user-defined functions and subroutines:

QUIET=ON | OFF

specifies whether the nonfatal errors and warnings that are generated by the user-defined SAS language functions and subroutines are printed to the log. Nonfatal errors are usually associated with operations with missing values. The default is QUIET=ON.

TRACE=ON | OFF

specifies whether the user-defined SAS language functions and subroutines tracings are printed to the log. Tracings are the results of every operation executed. This option is generally used for debugging. The default is TRACE=OFF.

ID Statement

ID *variable* **INTERVAL=** *interval options* ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable's values are assumed to be SAS date, time, or datetime values. In addition, the ID statement specifies the (desired) frequency associated with the time series. The ID statement options also specify how the observations are accumulated and how the time ID values are aligned to form the time series. The options specified affect all variables listed in subsequent INPUT and TARGET statements. If an ID statement is specified, the INTERVAL= option must also be specified. The other ID statement options are optional. If an ID statement is not specified, the observation number, with respect to the BY group, is used as the time ID.

The following options can be used with the ID statement:

ACCUMULATE=*option*

specifies how the data set observations are accumulated within each time period. The frequency (width of each time interval) is specified by the INTERVAL= option. The ID variable contains the time ID values. Each time ID variable value corresponds to a specific time period. The accumulated values form the time series, which is used in subsequent analysis.

The ACCUMULATE= option is particularly useful when there are zero or more than one input observations that coincide with a particular time period (for example, time-stamped transactional data). The EXPAND procedure offers additional frequency conversions and transformations that can also be useful in creating a time series.

The following *options* determine how the observations are accumulated within each time period based on the ID variable and the frequency specified by the INTERVAL= option:

NONE	No accumulation occurs; the ID variable values must be equally spaced with respect to the frequency. This is the default option.
TOTAL	Observations are accumulated based on the total sum of their values.
AVERAGE AVG	Observations are accumulated based on the average of their values.
MINIMUM MIN	Observations are accumulated based on the minimum of their values.
MEDIAN MED	Observations are accumulated based on the median of their values.
MAXIMUM MAX	Observations are accumulated based on the maximum of their values.
N	Observations are accumulated based on the number of nonmissing observations.
NMISS	Observations are accumulated based on the number of missing observations.
NOBS	Observations are accumulated based on the number of observations.
FIRST	Observations are accumulated based on the first of their values.
LAST	Observations are accumulated based on the last of their values.
STDDEV STD	Observations are accumulated based on the standard deviation of their values.
CSS	Observations are accumulated based on the corrected sum of squares of their values.
USS	Observations are accumulated based on the uncorrected sum of squares of their values.

If the ACCUMULATE= option is specified, the SETMISSING= option is useful for specifying how accumulated missing values are treated. If missing values should be interpreted as zero, then SETMISSING=0 should be used. The section “[Details: SIMILARITY Procedure](#)” on page 1661 describes accumulation in greater detail.

ALIGN=option

controls the alignment of SAS dates that are used to identify output observations. The ALIGN= option accepts the following values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. ALIGN=BEGINNING is the default.

END=option

specifies a SAS date, datetime, or time value that represents the end of the data. If the last time ID variable value is less than the END= value, the series is extended with missing values. If the last time ID variable value is greater than the END= value, the series is truncated. For example, END=“&sysdate”D uses the automatic macro variable SYSDATE to extend or truncate the series to the current date. The START= and END= options can be used to ensure that data that are associated within each BY group contain the same number of observations.

FORMAT=*format*

specifies the SAS format for the time ID values. If the FORMAT= option is not specified, the default format is implied by the INTERVAL= option. For example, FORMAT=DATE9. specifies that the DATE9. SAS format be used. Notice that the terminating “.” is required when specifying a SAS format.

INTERVAL=*interval*

specifies the frequency of the accumulated time series. For example, if the input data set consists of quarterly observations, then INTERVAL=QTR should be used. If the SEASONALITY= option is not specified, the length of the seasonal cycle is implied from the INTERVAL= option. For example, INTERVAL=QTR implies a seasonal cycle of length 4. If the ACCUMULATE= option is also specified, the INTERVAL= option determines the time periods for the accumulation of observations.

NOTSORTED

specifies that the time ID values are not in sorted order. The SIMILARITY procedure sorts the data with respect to the time ID prior to analysis if the NOTSORTED option is specified.

SETMISSING=*option* | *number*

specifies how missing values (either actual or accumulated) are interpreted in the accumulated time series. If a *number* is specified, missing values are set to that number. If a missing value indicates an unknown value, the SETMISSING= option should not be used. If a missing value indicates no value, then SETMISSING=0 should be used. You typically use SETMISSING=0 for transactional data, because no recorded data usually implies no activity. The following *options* can also be used to determine how missing values are assigned:

MISSING	Missing values are set to missing. This is the default option.
AVERAGE AVG	Missing values are set to the accumulated average value.
MINIMUM MIN	Missing values are set to the accumulated minimum value.
MEDIAN MED	Missing values are set to the accumulated median value.
MAXIMUM MAX	Missing values are set to the accumulated maximum value.
FIRST	Missing values are set to the accumulated first nonmissing value.
LAST	Missing values are set to the accumulated last nonmissing value.
PREVIOUS PREV	Missing values are set to the previous period's accumulated nonmissing value. Missing values at the beginning of the accumulated series remain missing.
NEXT	Missing values are set to the next period's accumulated nonmissing value. Missing values at the end of the accumulated series remain missing.

START=*option*

specifies a SAS date, datetime, or time value that represents the beginning of the data. If the first time ID variable value is greater than the START= value, the series is prepended with missing values. If the first time ID variable value is less than the START= value, the series is truncated. The START= and END= options can be used to ensure that data that are associated with each BY group contain the same number of observations.

ZEROMISS=option

specifies how beginning and ending zero values (either actual or accumulated) are interpreted in the accumulated time series. The following *options* can also be used to determine how beginning and ending zero values are assigned:

NONE	Beginning and ending zeros are unchanged. This is the default.
LEFT	Beginning zeros are set to missing.
RIGHT	Ending zeros are set to missing.
BOTH	Both beginning and ending zeros are set to missing.

If the accumulated series is all missing or zero, the series is not changed.

INPUT Statement

INPUT *variable-list* < / *options* > ;

The INPUT statement lists the input numeric variables in the DATA= data set whose values are to be accumulated to form the time series or represent ordered numeric sequences (when no ID statement is specified).

An input data set variable can be specified in only one INPUT or TARGET statement. Any number of INPUT statements can be used. The following *options* can be used with an INPUT statement:

ACCUMULATE=option

specifies how the data set observations are accumulated within each time period for the variables listed in the INPUT statement. If the ACCUMULATE= option is not specified in the INPUT statement, accumulation is determined by the ACCUMULATE= option of the ID statement. If the ACCUMULATE= option is not specified in the ID statement or the INPUT statement, no accumulation is performed. See the ID statement ACCUMULATE= option for more details.

DIF=(numlist)

specifies the differencing to be applied to the accumulated time series. The list of differencing orders must be separated by spaces or commas. For example, DIF=(1,3) specifies first, then third order, differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the DIF= option. Simple differencing is useful when you want to detrend the time series before computing the similarity measures.

NORMALIZE=option

specifies the sequence normalization to be applied to the working input sequence. The following normalization *options* are provided:

NONE	No normalization is applied. This option is the default.
ABSOLUTE	Absolute normalization is applied.
STANDARD	Standard normalization is applied.
<i>User-Defined</i>	Normalization is computed by a user-defined subroutine that is created using the FCMP procedure, where <i>User-Defined</i> is the subroutine name.

Normalization is applied to the working input sequence, which can be a subset of the working input time series if the SLIDE=INDEX or SLIDE=SEASON option is specified.

SCALE=option

specifies the scaling of the working input sequence with respect to the working target sequence. Scaling is performed after normalization. The following scaling *options* are provided:

NONE	No scaling is applied. This option is the default.
ABSOLUTE	Absolute scaling is applied.
STANDARD	Standard scaling is applied.
<i>User-Defined</i>	Scaling is computed by a user-defined subroutine that is created using the FCMP procedure, where <i>User-Defined</i> is the subroutine name.

Scaling is applied to the working input sequence, which can be a subset of the working input time series if the SLIDE=INDEX or SLIDE=SEASON option is specified.

SDIF=(numlist)

specifies the seasonal differencing to be applied to the accumulated time series. The list of seasonal differencing orders must be separated by spaces or commas. For example, SDIF=(1,3) specifies first, then third, order seasonal differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the SDIF= option. Seasonal differencing is useful when you want to deseasonalize the time series before computing the similarity measures.

SETMISSING=option | number

SETMISS=option | number

specifies how missing values (either actual or accumulated) are interpreted in the accumulated time series or ordered sequence for variables listed in the INPUT statement. If the SETMISSING= option is not specified in the INPUT statement, missing values are set based on the SETMISSING= option in the ID statement. If the SETMISSING= option is not specified in the ID statement or the INPUT statement, no missing value interpretation is performed. See the ID statement SETMISSING= option for more details.

TRANSFORM=option

specifies the time series transformation to be applied to the accumulated time series. The following transformations are provided:

NONE	No transformation is applied. This option is the default.
LOG	Logarithmic transformation is applied.
SQRT	Square-root transformation is applied.
LOGISTIC	Logistic transformation is applied.
BOXCOX(<i>number</i>)	Box-Cox transformation with parameter is applied, where the real <i>number</i> is between -5 and 5.
<i>User-Defined</i>	Transformation is computed by a user-defined subroutine that is created using the FCMP procedure, where <i>User-Defined</i> is the subroutine name.

When the TRANSFORM= option is specified, the time series must be strictly positive unless a user-defined function is used.

TRIMMISSING=option

TRIMMISSING=option

specifies how missing values (either actual or accumulated) are trimmed from the accumulated time series or ordered sequence for variables that are listed in the INPUT statement. The following trimming options are provided:

NONE	No missing value trimming is applied.
LEFT	Beginning missing values are trimmed.
RIGHT	Ending missing values are trimmed.
BOTH	Both beginning and ending missing value are trimmed. This is the default.

ZEROMISS=option

specifies how beginning and ending zero values (either actual or accumulated) are interpreted in the accumulated time series or ordered sequence for variables listed in the INPUT statement. If the ZEROMISS= option is not specified in the INPUT statement, beginning and ending zero values are set based on the ZEROMISS= option of the ID statement. If the ZERO= option is not specified in the ID statement or the INPUT statement, no zero value interpretation is performed. See the ID statement ZEROMISS= option for more details.

TARGET Statement

TARGET *variable-list* < / *options* > ;

The TARGET statement lists the numeric target variables in the DATA= data set whose values are to be accumulated to form the time series or represent ordered numeric sequences (when no ID statement is specified).

An input data set variable can be specified in only one INPUT or TARGET statement. Any number of TARGET statements can be used. The following *options* can be used with a TARGET statement:

ACCUMULATE=option

specifies how the data set observations are accumulated within each time period for the variables listed in the TARGET statement. If the ACCUMULATE= option is not specified in the TARGET statement, accumulation is determined by the ACCUMULATE= option in the ID statement. If the ACCUMULATE= option is not specified in the ID statement or the TARGET statement, no accumulation is performed. See the ID statement ACCUMULATE= option for more details.

COMPRESS=option | (options)

specifies the sliding sequence (global) and warping (local) compression range of the target sequence with respect to the input sequence. Compression of the target sequence is the same as expansion of the input sequence and vice versa. The compression limits are defined based on the length of the target sequence and are imposed on the target sequence. The following compression options are provided:

GLOBALABS=*integer* specifies the absolute global compression, where *integer* ranges from zero to 10,000. GLOBALABS=0 implies no global compression, which is the default unless the GLOBALPCT= option is specified.

GLOBALPCT=*number* specifies global compression as a percentage of the length of the target sequence, where *number* ranges from zero to 100. GLOBALPCT=0 implies no global compression, which is the default. GLOBALPCT=100 implies maximum allowable compression.

LOCALABS=*integer* specifies the absolute local compression, where *integer* ranges from zero to 10,000. The default is maximum allowable absolute local compression unless the LOCALPCT= option is specified.

LOCALPCT=*number* specifies local compression as a percentage of the length of the input sequence, where *number* ranges from zero to 100. The percentage specified by the LOCALPCT= option must be less than the GLOBALPCT= option. LOCALPCT=0 implies no local compression. LOCALPCT=100 implies maximum allowable local compression. The default is LOCALPCT=100.

If the SLIDE=NONE or the SLIDE=SEASON option is specified in the TARGET statement, the global compression options are ignored. To disallow local compression, use the option COMPRESS=(LOCALPCT=0 LOCALABS=0).

If the SLIDE=INDEX option is specified, the global compression options are not ignored. To completely disallow both global and local compression, use the option COMPRESS=(GLOBALPCT=0 LOCALPCT=0) or COMPRESS=(GLOBALABS=0 LOCALABS=0). To allow only local compression, use the option COMPRESS=(GLOBALPCT=0 GLOBALABS=0). These are the default compression options.

The preceding options can be used in combination to specify the desired amount of global and local compression as the following examples illustrate, where L_c denotes the global compression limit and l_c denotes the local compression limit:

- COMPRESS=(GLOBALPCT=20) allows the global and local compression to range from zero to $L_c = \min(\lfloor 0.2N_y \rfloor, (N_y - 1))$.
- COMPRESS=(GLOBALPCT=20 GLOBALABS=10) allows the global and local compression to range from zero to $L_c = \min(\lfloor 0.2N_y \rfloor, \min((N_y - 1), 10))$.
- COMPRESS=(LOCALPCT=10) allows the local compression to range from zero to $l_c = \min(\lfloor 0.1N_y \rfloor, (N_y - 1))$.
- COMPRESS=(LOCALPCT=20 LOCALABS=5) allows the local compression to range from zero to $l_c = \min(\lfloor 0.2N_y \rfloor, \min((N_y - 1), 5))$.
- COMPRESS=(GLOBALPCT=20 LOCALPCT=20) allows the global compression to range from zero to $L_c = \min(\lfloor 0.2N_y \rfloor, (N_y - 1))$ and allows the local compression to range from zero to $l_c = \min(\lfloor 0.2N_y \rfloor, (N_y - 1))$.
- COMPRESS=(GLOBALPCT=20 GLOBALABS=10 LOCALPCT=10 LOCALABS=5) allows the global compression to range from zero to $L_c = \min(\lfloor 0.2N_y \rfloor, \min((N_y - 1), 10))$ and allows the local compression to range from zero to $l_c = \min(\lfloor 0.1N_y \rfloor, \min((N_y - 1), 5))$.

Suppose T_z is the length of the input time series and N_y is the length of the target sequence. The valid global compression limit, L_c , is always limited by the length of the target sequence: $0 \leq L_c < N_y$.

Suppose N_x is the length of the input sequence and N_y is the length of the target sequence. The *valid* local compression limit, l_c , is always limited by the lengths of the input and target sequence: $\max(0, (N_y - N_x)) \leq l_c < N_y$.

DIF=(numlist)

specifies the differencing to be applied to the accumulated time series. The list of differencing orders must be separated by spaces or commas. For example, DIF=(1,3) specifies first, then third, order differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the DIF= option. Simple differencing is useful when you want to detrend the time series before computing the similarity measures.

EXPAND=option | (options)

specifies the sliding sequence (global) and warping (local) expansion range of the target sequence with respect to the input sequence. Expansion of the target sequence is the same as compression of the input sequence and vice versa. The expansion limits are defined based on the length of the input sequence, but are imposed on the target sequence. The following expansion options are provided:

GLOBALABS=integer specifies the absolute global expansion, where *integer* ranges from zero to 10,000. GLOBALABS=0 implies no global expansion, which is the default unless the GLOBALPCT= option is specified.

GLOBALPCT=number specifies global expansion as a percentage of the length of the target sequence, where *number* ranges from zero to 100. GLOBALPCT=0 implies no global expansion, which is the default unless the GLOBALABS= option is specified. GLOBALPCT=100 implies maximum allowable global expansion.

LOCALABS=integer specifies the absolute local expansion, where *integer* ranges from zero to 10,000. The default is the maximum allowable absolute local expansion unless the LOCALPCT= option is specified.

LOCALPCT=number specifies local expansion as a percentage of the length of the target sequence, where *number* ranges from zero to 100. LOCALPCT=0 implies no local expansion. LOCALPCT=100 implies maximum allowable local expansion. The default is LOCALPCT=100.

If the SLIDE=NONE or the SLIDE=SEASON option is specified in the TARGET statement, the global expansion options are ignored. To disallow local expansion, use the option EXPAND=(LOCALPCT=0 LOCALABS=0).

If the SLIDE=INDEX option is specified, the global expansion options are not ignored. To completely disallow both global and local expansion, use the option EXPAND=(GLOBALPCT=0 LOCALPCT=0) or EXPAND=(GLOBALABS=0 LOCALABS=0). To allow only local expansion, use the option EXPAND=(GLOBALPCT=0 GLOBALABS=0). These are the default expansion options.

The preceding options can be used in combination to specify the desired amount of global and local expansion as the following examples illustrate, where L_e denotes the global expansion limit and l_e denotes the local expansion limit:

- EXPAND=(GLOBALPCT=20) allows the global and local expansion to range from zero to $L_e = \min(\lfloor 0.2N_y \rfloor, (N_y - 1))$.

- EXPAND=(GLOBALPCT=20 GLOBALABS=10) allows the global expansion to range from zero to $L_e = \min(\lfloor 0.2N_y \rfloor, \min((N_y - 1), 10))$.
- EXPAND=(LOCALPCT=10) allows the local expansion to range from zero to $l_e = \min(\lfloor 0.1N_y \rfloor, (N_y - 1))$.
- EXPAND=(LOCALPCT=10 LOCALABS=5) allows the local expansion to range from zero to $l_e = \min(\lfloor 0.1N_y \rfloor, \min((N_y - 1), 5))$.
- EXPAND=(GLOBALPCT=20 LOCALPCT=10) allows the global expansion to range from zero to $L_e = \min(\lfloor 0.2N_y \rfloor, (N_y - 1))$ and allows the local expansion to range from zero to $l_e = \min(\lfloor 0.1N_y \rfloor, (N_y - 1))$.
- EXPAND=(GLOBALPCT=20 GLOBALABS=10 LOCALPCT=10 LOCALABS=5) allows the global expansion to range from zero to $L_e = \min(\lfloor 0.2N_y \rfloor, \min((N_y - 1), 10))$ and allows the local expansion to range from zero to $l_e = \min(\lfloor 0.1N_y \rfloor, \min((N_y - 1), 5))$.

Suppose T_z is the length of the input time series and N_y is the length of the target sequence. The *valid* global expansion limit, L_e , is always limited by the length of the input time series: $0 \leq L_e < T_z$.

Suppose N_x is the length of the input sequence and N_y is the length of the target sequence. The *valid* local expansion limit, l_e , is always limited by the lengths of the input and target sequence: $\max(0, (N_x - N_y)) \leq l_e < N_x$.

MEASURE=option

specifies the similarity measure to be computed by using the working input and target sequences. The following similarity measures are provided:

SQRDEV	squared deviation. This option is the default.
ABSDEV	absolute deviation
MSQRDEV	mean squared deviation
MSQRDEVINP	mean squared deviation relative to the length of the input sequence
MSQRDEVTAR	mean squared deviation relative to the length of the target sequence
MSQRDEVMIN	mean squared deviation relative to the minimum valid path length
MSQRDEVMAX	mean squared deviation relative to the maximum valid path length
MABSDEV	mean absolute deviation
MABSDEVINP	mean absolute deviation relative to the length of the input sequence
MABSDEVTAR	mean absolute deviation relative to the length of the target sequence
MABSDEVMIN	mean absolute deviation relative to the minimum valid path length
MABSDEVMAX	mean absolute deviation relative to the maximum valid path length
User-Defined	The measure is computed by a user-defined function created by using the FCMP procedure, where <i>User-Defined</i> is the function name.

NORMALIZE=option

specifies the sequence normalization to be applied to the working target sequence. The following normalization options are provided:

NONE	No normalization is applied. This option is the default.
ABSOLUTE	Absolute normalization is applied.
STANDARD	Standard normalization is applied.
<i>User-Defined</i>	Normalization is computed by a user-defined subroutine that is created by using the FCMP procedure, where <i>User-Defined</i> is the subroutine name.

PATH=option

specifies the similarity measure and warping path information to be computed using the working input and target sequences. The following similarity measures and warping path are provided:

<i>User-Defined</i>	The measure and path are computed by a user-defined subroutine that is created by using the FCMP procedure, where <i>User-Defined</i> is the subroutine name
---------------------	--

For computational efficiency, the PATH= option should be only used when you want to compute both the similarity measure and the warping path information. If only the similarity measure is needed, use the MEASURE= option. If you specify both the MEASURE= and PATH= option in the TARGET statement, the PATH= option takes precedence.

SDIF=(numlist)

specifies the seasonal differencing to be applied to the accumulated time series. The list of seasonal differencing orders must be separated by spaces or commas. For example, SDIF=(1,3) specifies first, then third, order seasonal differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the SDIF= option. Seasonal differencing is useful when you want to deseasonalize the time series before computing the similarity measures.

SETMISSING=option | number**SETMISS=option | number**

option specifies how missing values (either actual or accumulated) are interpreted in the accumulated time series for variables that are listed in the TARGET statement. If the SETMISSING= option is not specified in the TARGET statement, missing values are set based on the SETMISSING= option in the ID statement. If the SETMISSING= option is not specified in the ID statement or the TARGET statement, no missing value interpretation is performed. See the ID statement SETMISSING= option for more details.

SLIDE=option

specifies the sliding of the target sequence with respect to the input sequence. The following slides are provided:

NONE	No sequence sliding. The input time series is compared with the target sequence directly with no sliding. This option is the default.
INDEX	Slide by time index. The input time series is compared with the target sequence by observation index.
SEASON	Slide by seasonal index. The input time series is compared with the target sequence by seasonal index.

The SLIDE= option takes precedence over the COMPRESS= and EXPAND= options.

TRANSFORM=option

specifies the time series transformation to be applied to the accumulated time series. The following transformations are provided:

NONE	No transformation is applied. This option is the default.
LOG	Logarithmic transformation is applied.
SQRT	Square-root transformation is applied.
LOGISTIC	Logistic transformation is applied.
BOXCOX(<i>number</i>)	Box-Cox transformation with parameter is applied, where the real <i>number</i> is between -5 and 5
<i>User-Defined</i>	Transformation is computed by a user-defined subroutine that is created by using the FCMP procedure, where <i>User-Defined</i> is the subroutine name.

When the TRANSFORM= option is specified, the time series must be strictly positive unless a user-defined function is used.

TRIMMISSING=option**TRIMMISS= option**

specifies how missing values (either actual or accumulated) are trimmed from the accumulated time series or ordered sequence for variables that are listed in the TARGET statement. The following trimming options are provided:

NONE	No missing value trimming is applied.
LEFT	Beginning missing values are trimmed.
RIGHT	Ending missing values are trimmed.
BOTH	Both beginning and ending missing values are trimmed. This is the default.

ZEROMISS=option

specifies how beginning and ending zero values (either actual or accumulated) are interpreted in the accumulated time series or ordered sequence for variables listed in the TARGET statement. If the ZEROMISS= option is not specified in the TARGET statement, beginning and ending values are set based on the ZEROMISS= option in the ID statement. See the ID statement ZEROMISS= option for more details.

Details: SIMILARITY Procedure

You can use the SIMILARITY procedure to do the following functions, which are done in the order shown. First, you can form time series data from transactional data with the options shown:

1. accumulation ACCUMULATE= option

- 2. missing value interpretation SETMISSING= option
- 3. zero value interpretation ZEROMISS= option

Next, you can transform the accumulated time series to form the working time series with the following options. Transformations are useful when you want to stabilize the time series before computing the similarity measures. Simple and seasonal differencing are useful when you want to detrend or deseasonalize the time series before computing the similarity measures. Often, but not always, the TRANSFORM=, DIF=, and SDIF= options should be specified in the same way for both the target and input variables.

- 4. time series transformation TRANSFORM= option
- 5. time series differencing DIF= and SDIF= option
- 6. time series missing value trimming TRIMMISSING= option
- 7. time series descriptive statistics PRINT=DESCSTATS option

After the working series is formed, you can treat it as an ordered sequence that can be normalized or scaled. Normalizations are useful when you want to compare the “shape” or “profile” of the time series. Scaling is useful when you want to compare the input sequence to the target sequence while discounting the variation of the target sequence.

- 8. normalization NORMALIZE= option
- 9. scaling SCALE= option

After the working sequences are formed, you can compute similarity measures between input and target sequences:

- 10. sliding SLIDE= option
- 11. warping COMPRESS= and EXPAND= option
- 12. similarity measure MEASURE= and PATH= option

The SLIDE= option specifies observation-index sliding, seasonal-index sliding, or no sliding. The COMPRESS= and EXPAND= options specify the warping limits. The MEASURE= and PATH= options specify how the similarity measures are computed.

Accumulation

If the ACCUMULATE= option is specified in the ID, INPUT, or TARGET statement, data set observations are accumulated within each time period. The frequency (width of each time interval) is specified by the INTERVAL= option in the ID statement. The ID variable contains the time ID values. Each time ID value

corresponds to a specific time period. Accumulation is particularly useful when the input data set contains transactional data, whose observations are not spaced with respect to any particular time interval. The accumulated values form the time series, which is used in subsequent analyses.

For example, suppose a data set contains the following observations:

19MAR1999	10
19MAR1999	30
11MAY1999	50
12MAY1999	20
23MAY1999	20

If the INTERVAL=MONTH is specified, all of the preceding observations fall within three time periods of March 1999, April 1999, and May 1999. The observations are accumulated within each time period as follows:

If the ACCUMULATE=NONE option is specified, an error is generated because the ID variable values are not equally spaced with respect to the specified frequency (MONTH).

If the ACCUMULATE=TOTAL option is specified, the data are accumulated as follows:

01MAR1999	40
01APR1999	.
01MAY1999	90

If the ACCUMULATE=AVERAGE option is specified, the data are accumulated as follows:

01MAR1999	20
01APR1999	.
01MAY1999	30

If the ACCUMULATE=MINIMUM option is specified, the data are accumulated as follows:

01MAR1999	10
01APR1999	.
01MAY1999	20

If the ACCUMULATE=MEDIAN option is specified, the data are accumulated as follows:

01MAR1999	20
01APR1999	.
01MAY1999	20

If the ACCUMULATE=MAXIMUM option is specified, the data are accumulated as follows:

01MAR1999	30
01APR1999	.
01MAY1999	50

If the ACCUMULATE=FIRST option is specified, the data are accumulated as follows:

```
O1MAR1999    10
O1APR1999    .
O1MAY1999    50
```

If the ACCUMULATE=LAST option is specified, the data are accumulated as follows:

```
O1MAR1999    30
O1APR1999    .
O1MAY1999    20
```

If the ACCUMULATE=STDDEV option is specified, the data are accumulated as follows:

```
O1MAR1999    14.14
O1APR1999    .
O1MAY1999    17.32
```

As can be seen from the preceding examples, even though the data set observations contain no missing values, the accumulated time series can have missing values.

Missing Value Interpretation

Sometimes missing values should be interpreted as unknown values. But sometimes missing values are known, such as when missing values are created from accumulation and no observations should be interpreted as no (zero) value. In the former case, the SETMISSING= option in the ID, INPUT, or TARGET statement can be used to interpret how missing values are treated. The SETMISSING=0 option should be used when missing observations are to be treated as no (zero) values. In other cases, missing values should be interpreted as global values, such as minimum or maximum values of the accumulated series. The accumulated and interpreted time series is used in subsequent analyses.

The SETMISSING=0 option should be used with missing observations are to be treated as a zero value. In other cases, missing values should be interpreted as global values, such as minimum or maximum values of the accumulated series. The accumulated and interpreted time series is then used in subsequent analyses.

Zero Value Interpretation

When querying certain databases for time-stamped data based on a particular time range, time periods that contain no data are sometimes assigned zero values. For certain analyses, it is more desirable to assign these values to missing. Often, these beginning or ending zero values need to be interpreted as missing values. The ZEROMISS= option in the ID, INPUT, or TARGET statement specifies that the beginning, ending, or both the beginning and ending values are to be interpreted as zero values.

Time Series Transformation

Transformations are useful when you want to stabilize the time series before computing the similarity measures. There are four transformations available, for strictly positive series only. Let $y_t > 0$ be the original time series, and let w_t be the transformed series. The transformations are defined as follows:

Log is the logarithmic transformation,

$$w_t = \ln(y_t)$$

Logistic is the logistic transformation,

$$w_t = \ln(cy_t/(1 - cy_t))$$

where the scaling factor c is

$$c = (1 - e^{-6})10^{-\text{ceil}(\log_{10}(\max(y_t)))}$$

and $\text{ceil}(x)$ is the smallest integer greater than or equal to x .

Square root is the square root transformation,

$$w_t = \sqrt{y_t}$$

Box-Cox is the Box-Cox transformation,

$$w_t = \begin{cases} \frac{y_t^\lambda - 1}{\lambda} & \lambda \neq 0 \\ \ln(y_t) & \lambda = 0 \end{cases}$$

User-Defined is the transformation computed by a user-defined subroutine that is created by using the FCMP procedure, where *User-Defined* is the subroutine name.

Other time series transformations can be performed prior to invoking the SIMILARITY procedure by using the SAS/ETS EXPAND procedure or the DATA step.

Time Series Differencing

After optionally transforming the series, the accumulated series can be simply or seasonally differenced using the INPUT or TARGET statement DIF= and SDIF= options. Simple and seasonal differencing are useful when you want to detrend or deseasonalize the time series before computing the similarity measures.

For example, suppose y_t is a monthly time series. The following examples of the DIF= and SDIF= options demonstrate how to simply and seasonally difference the time series: DIF=(1,3) specifies first, then third, order differencing; SDIF=(1,3) specifies first, then third, order seasonal differencing.

Additionally, assuming that y_t is strictly positive, the INPUT or TARGET statement TRANSFORM= option and the DIF= and SDIF= options can be combined.

Time Series Missing Value Trimming

In some instances, missing values should be interpreted as an unknown observation, but other times, missing values are known and should be interpreted as a zero value. This is the case when missing values are created from accumulation, and a missing observation should be interpreted as having no value (meaning a value of zero). In the former case, the SETMISSING=option in the ID, INPUT, or TARGET, statement can be used to interpret how missing observations should be treated. By default, missing values, at the beginning and ending of the data set, are trimmed from the data set prior to analysis. This can be performed using TRIMMISS=both.

Time Series Descriptive Statistics

After a series has been optionally accumulated and transformed with missing values interpreted, descriptive statistics can be computed for the resulting working series by specifying the PRINT=DESCSTATS option. This option produces an ODS table that contains the sum, mean, minimum, maximum, and standard deviation of the working series.

Input and Target Sequences

After the input and target working series are formed, they can be treated as two ordered sequences. Given an input time sequence, x_i , for $i = 1$ to N_x , where i is the input sequence index, and a target time sequence, y_j , for $j = 1$ to N_y , where j is the target sequence index, these sequences are analyzed for similarity.

Sliding Sequences

Similarity measures can be computed between the target sequence and any contiguous subsequences of the input time series.

There are three types of sequence sliding:

- no sliding
- slide by time index
- slide by season index

For more information, see Leonard, Elsheimer, and Sloan (2008).

Time Warping

Time warping allows for the comparison between target and input sequences of differing lengths by compressing or expanding the input sequence with respect to the target sequence while respecting the order of the sequence elements.

For more information, see Leonard, Elsheimer, and Sloan (2008).

Sequence Normalization

The working (input or target) sequence can be normalized prior to further analysis. Let q_i be the original sequence with mean μ_q and standard deviation σ_q , and let r_i be the normalized sequence. The normalizations are defined as follows:

- Standard is the standard normalization

$$r_i = (q_i - \mu_q) / \sigma_q$$

- Absolute is the absolute normalization

$$r_i = (q_i - \min(q_i)) / (\max(q_i) - \min(q_i))$$

- User-defined is a user-defined normalization created by the FCMP procedure.

Sequence Scaling

The working input sequence can be scaled to the working target sequence. Sequence scaling is applied after normalization. Let y_j be the working target sequence with mean μ_y and standard deviation σ_y . Let x_i be the working input sequence and let q_i be the scaled sequence. The scaling is defined as follows:

- Standard is the standard normalization

$$q_i = (x_i - \mu_y) / \sigma_y$$

- Absolute is the absolute scaling

$$q_i = (x_i - \min(y_j)) / (\max(y_j) - \min(y_j))$$

- User-defined is a user-defined scaling created by the FCMP procedure.

Similarity Measures

The working input sequence can be compared to the working target sequence to create a similarity.

For more information, see Leonard, Elsheimer, and Sloan (2008).

User-Defined Functions and Subroutines

A user-defined routine can be written in the SAS language by using the FCMP procedure or in the C language by using both the FCMP procedure and the PROTO procedure, respectively. The SIMILARITY procedure cannot use C language routines directly. The procedure can use only SAS language routines that might or might not call C language routines. Creating user-defined routines is more completely described in the FCMP procedure and the PROTO procedure documentation. The FCMP and PROTO procedures are part of Base SAS software.

The SAS language provides integrated memory management and exception handling such as operations on missing values. The C language provides flexibility and allows the integration of existing C language libraries. However, proper memory management and exception handling are solely the responsibility of the user. Additionally, the support for standard C libraries is restricted. If you have a choice, it is highly recommended that you write user-defined functions and subroutines in the SAS language using the FCMP procedure.

For each of the tasks previously described, the following sections describe the required subroutine or function signature and provide examples of using a user-defined routine with the SIMILARITY procedure.

Time Series Transformations

A user-defined transformation subroutine has the following subroutine signature:

```
SUBROUTINE <SUBROUTINE-NAME> ( <ARRAY-NAME>[*] );
```

where the array-name is the time series to be transformed.

For example, to duplicate the functionality of the built-in TRANSFORM=LOG option in the INPUT and TARGET statement, the following SAS statements create a user-defined version of this transformation called MYTRANSFORM and store this subroutine in the catalog SASUSER.MYSIMILAR.

```
proc fcmp outlib=sasuser.mysimilar.package;

  subroutine mytransform( series[*] );

    outargs series;

    length = DIM(series);
```

```

do i = 1 to length;
  value = series[i];
  if value > 0 then do;
    series[i] = log( value );
  end;
  else do;
    series[i] = .;
  end;
end;

endsub;

run;

```

This user-defined subroutine can be specified in the TRANSFORM= option in the INPUT or TARGET statement as follows:

```

options cmlib = sasuser.mysimilar;

proc similarity ...;
...
input  myinput  / transform=mytransform;
target mytarget / transform=mytransform;
...
run;

```

Sequence Normalizations

A user-defined normalization subroutine has the following signature:

```
SUBROUTINE <SUBROUTINE-NAME> ( <ARRAY-NAME>[*] );
```

where the array-name is the sequence to be normalized.

For example, to duplicate the functionality of the built-in NORMALIZE=ABSOLUTE option in the INPUT and TARGET statement, the following SAS statements create a user-defined version of this normalization called MYNORMALIZE and store this subroutine in the catalog SASUSER.MYSIMILAR.

```

proc fcmp outlib=sasuser.mysimilar.package;

  subroutine mynormalize( sequence[*] );

    outargs sequence;

    length = DIM(sequence);
    minimum = .; maximum = .;

    do i = 1 to length;

```

```

        value = sequence[i];
        if nmiss(minimum) | nmiss(maximum) then do;
            minimum = value;
            maximum = value;
        end;
        if nmiss(value) = 0 then do;
            if value < minimum then minimum = value;
            if value > maximum then maximum = value;
        end;
    end;

    do i = 1 to length;
        value = sequence[i];
        if nmiss( value ) | minimum > maximum then do;
            sequence[i] = .;
        end;
        else do;
            sequence[i] = (value - minimum) / (maximum - minimum);
        end;
    end;

endsub;

run;

```

This user-defined subroutine can be specified in the NORMALIZE= option in the INPUT or TARGET statement as follows:

```

options cmlib = sasuser.mysimilar;

proc similarity ...;
    ...
    input  myinput  / normalize=mynormalize;
    target mytarget / normalize=mynormalize;
    ...
run;

```

Sequence Scaling

A user-defined scaling subroutine has the following signature:

```
SUBROUTINE <SUBROUTINE-NAME> ( <ARRAY-NAME>[*], <ARRAY-NAME>[*] );
```

where the first array-name is the target sequence and the second array-name is the input sequence to be scaled.

For example, to duplicate the functionality of the built-in SCALE=ABSOLUTE option in the INPUT statement, the following SAS statements create a user-defined version of this scaling called MYSCALE and store this subroutine in the catalog SASUSER.MYSIMILAR.


```

proc fcmp outlib=sasuser.mysimilar.package;

  subroutine myscale( target[*], input[*] );

    outargs input;

    length = DIM(target);
    minimum = .; maximum = .;

    do i = 1 to length;
      value = target[i];
      if nmiss(minimum) | nmiss(maximum) then do;
        minimum = value;
        maximum = value;
      end;
      if nmiss(value) = 0 then do;
        if value < minimum then minimum = value;
        if value > maximum then maximum = value;
      end;
    end;

    do i = 1 to length;
      value = input[i];
      if nmiss( value ) | minimum > maximum then do;
        input[i] = .;
      end;
      else do;
        input[i] = (value - minimum) / (maximum - minimum);
      end;
    end;

  endsub;

run;

```

This user-defined subroutine can be specified in the SCALE= option in the INPUT statement as follows:

```

options cmplib=sasuser.mysimilar;

proc similarity ...;
  ...
  input myinput / scale=myscale;
  ...
run;

```

Similarity Measures

A user-defined similarity measure function has the following signature:

```

FUNCTION <FUNCTION-NAME> ( <ARRAY-NAME>[*], <ARRAY-NAME>[*] );

```

where the first array-name is the target sequence and the second array-name is the input sequence. The return value of the function is the similarity measure associated with the target sequence and the input sequence.

For example, to duplicate the functionality of the built-in MEASURE=ABSDEV option in the TARGET statement with no warping, the following SAS statements create a user-defined version of this measure called MYMEASURE and store this subroutine in the catalog SASUSER.MYSIMILAR.

```
proc fcmp outlib=sasuser.mysimilar.package;

  function mymeasure( target[*], input[*] );

    length = min(DIM(target), DIM(input));
    sum = 0; num = 0;

    do i = 1 to length;
      x = input[i];
      w = target[i];
      if nmiss(x) = 0 & nmiss(w) = 0 then do;
        d = x - w;
        sum = sum + abs(d);
        num = num + 1;
      end;
    end;

    if num <= 0 then return(.);

    return(sum);

  endsub;

run;
```

This user-defined function can be specified in the MEASURE= option in the TARGET statement as follows:

```
options cmplib=sasuser.mysimilar;

proc similarity ...;
  ...
  target mytarget / measure=mymeasure;
  ...
run;
```

For another example, to duplicate the functionality of the built-in MEASURE=SQRDEV and MEASURE=ABSDEV options by using the C language, the following SAS statements create a user-defined C language version of these measures called DTW_SQRDEV_C and DTW_ABSDEV_C and store these functions in the catalog SASUSER.CSIMIL.CFUNCS. DTW refers to dynamic time warping. These C language functions can be then called by SAS language functions and subroutines.

```
proc proto package=sasuser.csimil.cfuncs;
```

```

mapmiss double = 999999999;

double dtw_sqrdev_c( double * target / iotype=input,
                    int      targetLength,
                    double * input / iotype=input,
                    int      inputLength );

externc dtw_sqrdev_c;
double dtw_sqrdev_c( double * target,
                    int      targetLength,
                    double * input,
                    int      inputLength )
{
    int      i,j;
    double   x,w,d;
    double * prev = (double *)malloc( sizeof(double)*targetLength);
    double * curr = (double *)malloc( sizeof(double)*inputLength);
    if ( prev == 0 || curr == 0 ) return 999999999;

    x = input[0];
    for ( j=0; j<targetLength; j++ ) {
        w = target[j];
        d = x - w;
        d = d*d;
        if ( j == 0 ) prev[j] = d;
        else          prev[j] = d + prev[j-1];
    }

    for (i=1; i<inputLength; i++ ) {
        x = input[i];

        j = 0;
        w = target[j];
        d = x - w;
        d = d*d;
        curr[j] = d + prev[j];

        for (j=1; j<targetLength; j++ ) {
            w = target[j];
            d = x - w;
            d = d*d;
            curr[j] = d + fmin( prev[j],
                               fmin( prev[j-1], curr[j])));
        }

        if ( i < targetLength ) {
            for( j=0; j<inputLength; j++ )
                prev[j] = curr[j];
        }
    }

    d = curr[inputLength-1];
    free( (char*) prev);
    free( (char*) curr);
}

```

```

        return( d );
    }
externcend;

double dtw_absdev_c( double * target / iotype=input,
                    int      targetLength,
                    double * input / iotype=input,
                    int      inputLength );
externc dtw_absdev_c;
double dtw_absdev_c( double * target,
                    int      targetLength,
                    double * input,
                    int      inputLength )
{
    int      i,j;
    double   x,w,d;
    double * prev = (double *)malloc( sizeof(double)*targetLength);
    double * curr = (double *)malloc( sizeof(double)*inputLength);
    if ( prev == 0 || curr == 0 ) return 999999999;

    x = input[0];
    for ( j=0; j<targetLength; j++ ) {
        w = target[j];
        d = x - w;
        d = fabs(d);
        if ( j == 0) prev[j] = d;
        else prev[j] = d + prev[j-1];
    }

    for (i=1; i<inputLength; i++ ) {
        x = input[i];

        j = 0;
        w = target[j];
        d = x - w;
        d = fabs(d);
        curr[j] = d + prev[j];

        for (j=1; j<targetLength; j++) {
            w = target[j];
            d = x - w;
            d = fabs(d);
            curr[j] = d + fmin( prev[j],
                               fmin( prev[j-1], curr[j] ));
        }

        if ( i < inputLength) {
            for ( j=0; j<targetLength; j++ )
                prev[j] = curr[j];
        }
    }

    d = curr[inputLength-1];

```

```

        free( (char*) prev);
        free( (char*) curr);
        return( d );
    }
externcend;

run;

```

The preceding SAS statements create two C language functions which can then be used in SAS language functions or subroutines or both. However, these functions cannot be directly used by the SIMILARITY procedure. In order to use these C language functions in the SIMILARITY procedure, two SAS language functions must be created that call these two C language functions. The following SAS statements create two user-defined SAS language versions of these measures called DTW_SQRDEV and DTW_ABSDEV and stores these functions in the catalog SASUSER.MYSIMILAR.FUNCS. These SAS language functions use the previously created C language function; the SAS language functions can then be used by the SIMILARITY procedure.

```

proc fcmp outlib=sasuser.mysimilar.funcs
    inlib=sasuser.cffuncs;

    function dtw_sqrdev( target[*], input[*] );
        dev = dtw_sqrdev_c(target,DIM(target),input,DIM(input));
        return( dev );
    endsub;

    function dtw_absdev( target[*], input[*] );
        dev = dtw_absdev_c(target,DIM(target),input,DIM(input));
        return( dev );
    endsub;

run;

```

This user-defined function can be specified in the MEASURE= option in the TARGET statement as follows:

```

options cmplib=sasuser.mysimilar;

proc similarity ...;
    ...
    target  mytarget    / measure=dtw_sqrdev;
    target  yourtarget  / measure=dtw_absdev;
    ...
run;

```

Similarity Measures and Warping Path

A user-defined similarity measure and warping path information function has the following signature:

```

FUNCTION <FUNCTION-NAME> ( <ARRAY-NAME>[*], <ARRAY-NAME>[*],

```

```
<ARRAY-NAME>[*], <ARRAY-NAME>[*],  
<ARRAY-NAME>[*] );
```

where the first array-name is the target sequence, the second array-name is the input sequence, the third array-name is the returned target sequence indices, the fourth array-name is the returned input sequence indices, the fifth array-name is the returned path distances. The returned value of the function is the similarity measure. The last three returned arrays are used to compute the path and cost statistics.

The returned sequence indices must represent a valid warping path; that is, integers greater than zero and less than or equal to the sequence length and recorded in ascending order. The returned path distances must be nonnegative numbers.

Output Data Sets

The SIMILARITY procedure can create the OUT=, OUTMEASURE=, OUTPATH=, OUTSEQUENCE=, and OUTSUM= data sets. In general, these data sets contain the variables listed in the BY statement. The ID statement time ID variable is also included in the data sets when the time dimension is important. If an analysis step related to an output data step fails, then the values of this step are not recorded or are set to missing in the related output data set, and appropriate error and warning messages are recorded in the SAS log.

OUT= Data Set

The OUT= data set contains the variables that are specified in the BY, ID, INPUT, and TARGET statements. If the ID statement is specified, the ID variable values are aligned and extended based on the ALIGN=, INTERVAL=, START=, and END= options. The values of the variables specified in the INPUT and TARGET statements are accumulated based on the ACCUMULATE= option, missing values are interpreted based on the SETMISSING= option, and zero values are interpreted using the ZEROMISS= option. The accumulated time series is transformed based on the TRANSFORM=, DIF=, and SDIF= options.

OUTMEASURE= Data Set

The OUTMEASURE= data set records the similarity measures between each INPUT and TARGET statement variable with respect to each time ID value. The form of the OUTMEASURE= data set depends on the SORTNAMES and ORDER= options. The OUTMEASURE= data set contains the variables specified in the BY statement in addition to the variables listed below.

For ORDER=INPUTTARGET and ORDER=TARGETINPUT, the OUTMEASURE= data set has the following form:

```
_INPUT_      input variable name
```

<code>_TARGET_</code>	target variable name
<code>_TIMEID_</code>	time ID values
<code>_INPSEQ_</code>	input sequence values
<code>_TARSEQ_</code>	target sequence values
<code>_SIM_</code>	similarity measures

The OUTMEASURE= data set is ordered by the variables `_INPUT_`, then `_TARGET_`, then `_TIMEID_` when ORDER=INPUTTARGET. The OUTMEASURE= data set is ordered by the variables `_TARGET_`, then `_INPUT_`, then `_TIMEID_` when ORDER=TARGETINPUT.

For ORDER=INPUT, the OUTMEASURE= data set has the following form:

<code>_INPUT_</code>	input variable name
<code>_TIMEID_</code>	time ID values
<code>_INPSEQ_</code>	input sequence values
<i>target-names</i>	similarity measures that are associated with each TARGET statement variable name

The OUTMEASURE= data set is ordered by the variables `_INPUT_`, then `_TIMEID_`.

For ORDER=TARGET, the OUTMEASURE= data set has the following form:

<code>_TARGET_</code>	target variable name
<code>_TIMEID_</code>	time ID values
<code>_TARSEQ_</code>	target sequence values
<i>input-names</i>	similarity measures that are associated with each INPUT statement variable name

The OUTMEASURE= data set is ordered by the variables `_TARGET_`, then `_TIMEID_`.

OUTPATH= Data Set

The OUTPATH= data set records the path analysis between each INPUT and TARGET statement variable. This data set records the path sequences for each slide index and for each warp index associated with the slide index. The sequence values recorded are normalized and scaled based on the NORMALIZE= and SCALE= options.

The OUTPATH= data set contains the variables specified in the BY statement and the following variables:

<code>_INPUT_</code>	input variable name
<code>_TARGET_</code>	target variable name
<code>_TIMEID_</code>	time ID values
<code>_SLIDE_</code>	slide index

<code>_WARP_</code>	warp index
<code>_INPSEQ_</code>	input sequence values
<code>_TARSEQ_</code>	target sequence values
<code>_INPPTH_</code>	input path index
<code>_TARPTH_</code>	target path index
<code>_METRIC_</code>	distance metric values

The Warp Index indicates the total amount of warping for each slide. A negative number represents compression of the target sequence. A positive number represents expansion of the target sequence. The Warp Index is always zero for `SLIDE=NONE` and `SLIDE=SEASON`.

The sorting of the `OUTPATH=` data set depends on the `SORTNAMES` and the `ORDER=` option.

The `OUTPATH=` data set is ordered by the variables `_INPUT_`, then `_TARGET_`, then `_TIMEID_` when `ORDER=INPUTTARGET` or `ORDER=INPUT`. The `OUTPATH=` data set is ordered by the variables `_TARGET_`, then `_INPUT_`, then `_TIMEID_` when `ORDER=TARGETINPUT` or `ORDER=TARGET`.

If there are a large number of slides or warps or both, this data set might be large.

OUTSEQUENCE= Data Set

The `OUTSEQUENCE=` data set records the input and target sequences that are associated with each `INPUT` and `TARGET` statement variable. This data set records the input and target sequence values for each slide index and for each warp index that is associated with the slide index. The sequence values that are recorded are normalized and scaled based on the `NORMALIZE=` and `SCALE=` options. This data set also contains the similarity measure associated with the two sequences.

The `OUTSEQUENCE=` data set contains the variables specified in the `BY` statement in addition to the following variables:

<code>_INPUT_</code>	input variable name
<code>_TARGET_</code>	target variable name
<code>_TIMEID_</code>	time ID values
<code>_SLIDE_</code>	slide index
<code>_WARP_</code>	warp index
<code>_INPSEQ_</code>	input sequence values
<code>_TARSEQ_</code>	target sequence values
<code>_SIM_</code>	similarity measure
<code>_STATUS_</code>	sequence status

The sorting of the `OUTSEQUENCE=` data set depends on the `SORTNAMES` and the `ORDER=` option.

The OUTSEQUENCE= data set is ordered by the variables `_INPUT_`, then `_TARGET_`, then `_TIMEID_` when `ORDER=INPUTTARGET` or `ORDER=INPUT`. The OUTSEQUENCE= data set is ordered by the variables `_TARGET_`, then `_INPUT_`, then `_TIMEID_` when `ORDER=TARGETINPUT` or `ORDER=TARGET`.

If there are a large number of slides or warps or both, this data set might be large.

OUTSUM= Data Set

The OUTSUM= data set summarizes the similarity measures between each INPUT and TARGET statement variable. The form of the OUTSUM= data set depends on the SORTNAMES and ORDER= option. If the SORTNAMES option is specified, each variable (INPUT or TARGET) is analyzed in ascending order. The OUTSUM= data set contains the variables specified in the BY statement in addition to the variables listed below.

For `ORDER=INPUTTARGET` and `ORDER=TARGETINPUT`, the OUTSUM= data set has the following form:

<code>_INPUT_</code>	input variable name
<code>_TARGET_</code>	target variable name
<code>_STATUS_</code>	status flag that indicates whether the requested analyses were successful
<code>_TIMEID_</code>	time ID values
<code>_SIM_</code>	similarity measure summary

The OUTSUM= data set is ordered by the variables `_INPUT_`, then `_TARGET_` when `ORDER=INPUTTARGET`. The OUTSUM= data set is ordered by the variables `_TARGET_`, then `_INPUT_` when `ORDER=TARGETINPUT`.

For `ORDER=INPUT`, the OUTSUM= data set has the following form:

<code>_INPUT_</code>	input variable name
<code>_STATUS_</code>	status flag that indicates whether the requested analyses were successful
<i>target-names</i>	similarity measure summary that is associated with each TARGET statement variable name

The OUTSUM= data set is ordered by the variable `_INPUT_`.

For `ORDER=TARGET`, the OUTSUM= data set has the following form:

<code>_TARGET_</code>	target variable name
<code>_STATUS_</code>	status flag that indicates whether the requested analyses were successful
<i>input-names</i>	similarity measure summary that is associated with each INPUT statement variable name

The OUTSUM= data set is ordered by the variable `_TARGET_`.

`_STATUS_` Variable Values

The `_STATUS_` variable contains a code that specifies whether the similarity analysis has been successful or not. The `_STATUS_` variable can take the following values:

0	Success
3000	Accumulation failure
4000	Missing value interpretation failure
6000	Series is all missing
7000	Transformation failure
8000	Differencing failure
9000	Unable to compute descriptive statistics
10000	Normalization failure
11000	Input contains imbedded missing values
12000	Target contains imbedded missing values
13000	Scaling failure
14000	Measure failure
15000	Path failure
16000	Slide summarization failure

Printed Output

The SIMILARITY procedure optionally produces printed output by using the Output Delivery System (ODS). By default, the procedure produces no printed output. All output is controlled by the `PRINT=` and `PRINTDETAILS` options in the `PROC SIMILARITY` statement.

The sort, order, and form of the printed output depends on both the `SORTNAMES` option and the `ORDER=` option. If the `SORTNAMES` option is specified, each variable (INPUT or TARGET) is analyzed in ascending order. For `ORDER=INPUTTARGET`, the printed output is ordered by the INPUT statement variables (row) and then by the TARGET statement variables (row). For `ORDER=TARGETINPUT`, the printed output is ordered by the TARGET statement variables (row) and then by the INPUT statement variables (row). For `ORDER=INPUT`, the printed output is ordered by the INPUT statement variables (row) and then by the TARGET statement variables (column). For `ORDER=TARGET`, the printed output is ordered by the TARGET statement variables (row) and then by the INPUT statement variables (column).

In general, if an analysis step related to printed output fails, the values of that step are not printed and appropriate error and warning messages are recorded in the SAS log. The printed output is similar to the output data set; these similarities are described as follows:

PRINT=COSTS

prints the costs statistics.

PRINT=DESCSTATS

prints the descriptive statistics.

PRINT=PATHS

prints the path statistics.

PRINT=SLIDES

prints the sliding sequence summary.

PRINT=SUMMARY

prints the summary of similarity measures similar to the OUTSUM= data set.

PRINT=WARPS

prints the warp summary.

PRINTDETAILS

prints each table with greater detail.

ODS Table Names

The following table relates the PRINT= options to ODS tables.

Table 24.2 ODS Tables Produced in PROC SIMILARITY

ODS Table Name	Description	Option
CostStatistics	Cost statistics	PRINT=COSTS
DescStats	Descriptive statistics	PRINT=DESCSTATS
PathLimits	Path limits	PRINT=PATHS
PathStatistics	Path statistics	PRINT=PATHS
SlideMeasuresSummary	Summary of measure per slide	PRINT=SLIDES

Table 24.2 (continued)

ODS Table Name	Description	Option
MeasuresSummary	Measures summary	PRINT=SUMMARY
InputMeasuresSummary	Measures summary	PRINT=SUMMARY
TargetMeasuresSummary	Measures summary	PRINT=SUMMARY
WarpMeasuresSummary	Summary of measure per warp	PRINT=WARPS

The tables are related to a single series within a BY group.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the SIMILARITY procedure.

ODS Graph Names

PROC SIMILARITY assigns a name to each graph it creates by using ODS. You can use these names to selectively reference the graphs. The names are listed in [Table 24.3](#).

Table 24.3 ODS Graphics Produced by PROC SIMILARITY

ODS Graph Name	Plot Description	Statement	PLOTS= Option
CostsPlot	Costs plot	SIMILARITY	PLOTS=COSTS
NormalizedSequencePlot	Normalized Sequence Plot	SIMILARITY	PLOTS=NORMALIZED
PathDistancePlot	Path distances plot	SIMILARITY	PLOTS=DISTANCES
PathDistanceHistogram	Path distances histogram	SIMILARITY	PLOTS=DISTANCES
PathRelativeDistancePlot	Path relative distances plot	SIMILARITY	PLOTS=DISTANCES
PathRelativeDistanceHistogram	Path relative distances histogram	SIMILARITY	PLOTS=DISTANCES
PathPlot	Path plot	SIMILARITY	PLOTS=PATHS
PathSequencesPlot	Path sequences plot	SIMILARITY	PLOTS=MAPS
PathSequencesScaledPlot	Scaled path sequences map plot	SIMILARITY	PLOTS=MAPS
ScaledSequencePlot	Scaled Sequence plot	SIMILARITY	PLOTS=SCALED

Table 24.3 (continued)

ODS Graph Name	Plot Description	Statement	PLOTS= Option
SequencePlot	Sequence plot	SIMILARITY	PLOTS=SEQUENCES
SeriesPlot	Input time series plot	SIMILARITY	PLOTS=INPUTS
SimilarityPlot	Similarity measures plot	SIMILARITY	PLOTS=MEASURES
TargetSequencePlot	Target sequence plot	SIMILARITY	PLOTS=TARGETS
WarpPlot	Warping plot	SIMILARITY	PLOTS=WARPS
WarpScaledPlot	Scaled warping plot	SIMILARITY	PLOTS=WARPS

Time Series Plots

The time series plots (SeriesPlot) illustrate the input time series to be compared. The horizontal axis represents the input series time ID values, and the vertical axis represents the input series values.

Sequence Plots

The sequence plots (SequencePlot) illustrate the target and input sequences to be compared. The horizontal axis represents the (target or input) sequence index, and the vertical axis represents the (target or input) sequence values.

Path Plots

The path plot (PathPlot) and path limits plot (PathLimitsPlot) illustrate the path through the distance matrix. The horizontal axis represents the input sequence index, and the vertical axis represents the target sequence index. The dots represent the path coordinates. The upper parallel line represents the compression limit, and the lower parallel line represents the expansion limit. These plots visualize the path through the distance matrix. Vertical movements indicate compression, and horizontal movements represent expansion of the target sequence with respect to the input sequence. These plots are useful for visualizing the amount of expansion and compression along the path.

Time Warp Plots

The time warp plot (WarpPlot) and scaled time warp plot (WarpScaledPlot) illustrate the time warping. The horizontal axis represents the (input and target) sequence index. The upper line plot represents the target sequence. The lower line plot represents the input sequence. The lines that connect the input and target sequence values represent the mapping between the input and target sequence indices along the optimal path. These plots visualize the warping of the time index with respect to the input and target sequence values. Expansion of a single target sequence value occurs when it is mapped to more than one input sequence value. Expansion of a single input sequence value occurs when it is mapped to more than one target sequence value. The plots are useful for visualizing the mapping between the input and target sequence values along the path. The plots are useful for comparing the path sequences or input and target sequence after time warping.

Path Sequence Plots

The path sequence plot (`PathSequencesPlot`) and scaled path sequence plot (`PathSequencesScaledPlot`) illustrate the sequence mapping along the optimal path. The horizontal axis represents the path index. The dashed line represents the time warped input sequence. The solid line represents the time warped target sequence. These plots visualize the mapping between the input and target sequence values with respect to the path index. The scaled plot with the input and target sequence values are scaled and evenly separated for visual convenience.

Path Distance Plots

The path distance plots (`PathDistancePlot`) and path relative distance plots (`PathRelativeDistancePlot`) illustrate the path (relative) distances. The horizontal axis represents the path index. The vertical needles represent the (relative) distances. The horizontal reference lines indicate one and two standard deviations.

The path distance histogram (`PathDistanceHistogram`) and path relative distance histogram (`PathDistanceRelativeHistogram`) illustrate the distribution of the path (relative) distances. The bars represent the histogram, and the solid line represents a normal distribution with the same mean and variance.

Cost Plots

The cost plot (`CostPlot`) and cost limits plot (`CostPlot`) illustrate the cost of traversing the distance matrix. The horizontal axis represents the input sequence index, and the vertical axis represents the target sequence index. The colors and shading within the plot illustrate the incremental cost of traversing the distance matrix. The upper parallel line represents the compression limit, and the lower parallel line represents the expansion limit.

Examples: SIMILARITY Procedure

Example 24.1: Accumulating Transactional Data into Time Series Data

This example uses the SIMILARITY procedure to illustrate the accumulation of time-stamped transactional data that has been recorded at no particular frequency into time series data at a specific frequency. After the time series is created, the various SAS/ETS procedures related to time series analysis, similarity analysis, seasonal adjustment and decomposition, modeling, and forecasting can be used to further analyze the time series data.

Suppose that the input data set `WORK.RETAIL` contains variables `STORE` and `TIMESTAMP` and numerous other numeric transaction variables. The BY variable `STORE` contains values that break up the transactions into groups (BY groups). The time ID variable `TIMESTAMP` contains SAS date values recorded at no

particular frequency. The other data set variables contain the numeric transaction values to be analyzed. It is further assumed that the input data set is sorted by the variables STORE and TIMESTAMP.

The following statements form monthly time series from the transactional data based on the median value (ACCUMULATE=MEDIAN) of the transactions recorded with each time period. The accumulated time series values for time periods with no transactions are set to zero instead of missing (SETMISS=0). Only transactions recorded between the first day of 1998 (START='01JAN1998'D) and last day of 2000 (END='31JAN2000'D) are considered and if needed are extended to include this range.

```
proc similarity data=work.retail out=mseries;
  by store;
  id timestamp interval=month
      accumulate=median
      setmiss=0
      start='01jan1998'd
      end  ='31dec2000'd;
  target _NUMERIC_;
run;
```

The monthly time series data are stored in the data WORK.MSERIES. Each BY group associated with the BY variable STORE contains an observation for each of the 36 months associated with the years 1998, 1999, and 2000. Each observation contains the variable STORE, TIMESTAMP, and each of the analysis variables in the input DATA= data set.

After each set of transactions has been accumulated to form the corresponding time series, the accumulated time series can be analyzed by using various time series analysis techniques. For example, exponentially weighted moving averages can be used to smooth each series. The following statements use the EXPAND procedure to smooth the analysis variable named STOREITEM.

```
proc expand data=mseries
  out=smoothed
  from=month;
  by store;
  id timestamp;
  convert storeitem=smooth / transform=(ewma 0.1);
run;
```

The smoothed series is stored in the data set WORK.SMOOTHED. The variable SMOOTH contains the smoothed series.

If the time ID variable TIMESTAMP contains SAS datetime values instead of SAS date values, the INTERVAL=, START=, and END= options in the SIMILARITY procedure must be changed accordingly, and the following statements could be used to accumulate the datetime transactions to a monthly interval:

```
proc similarity data=work.retail
  out=tseries;
  by store;
  id timestamp interval=dtmonth
      accumulate=median
      setmiss=0
      start='01jan1998:00:00:00'dt
      end  ='31dec2000:00:00:00'dt;
  target _NUMERIC_;
```

```
run;
```

The monthly time series data are stored in the data WORK.TSERIES, and the time ID values use a SAS datetime representation.

Example 24.2: Similarity Analysis

This simple example illustrates how to use similarity analysis to compare two time sequences. The following statements create an example data set that contains two time sequences of differing lengths:

```
data test;
input i y x;
datalines;
1 2 3
2 4 5
3 6 3
4 7 3
5 3 3
6 8 6
7 9 3
8 3 8
9 10 .
10 11 .
;
run;
```

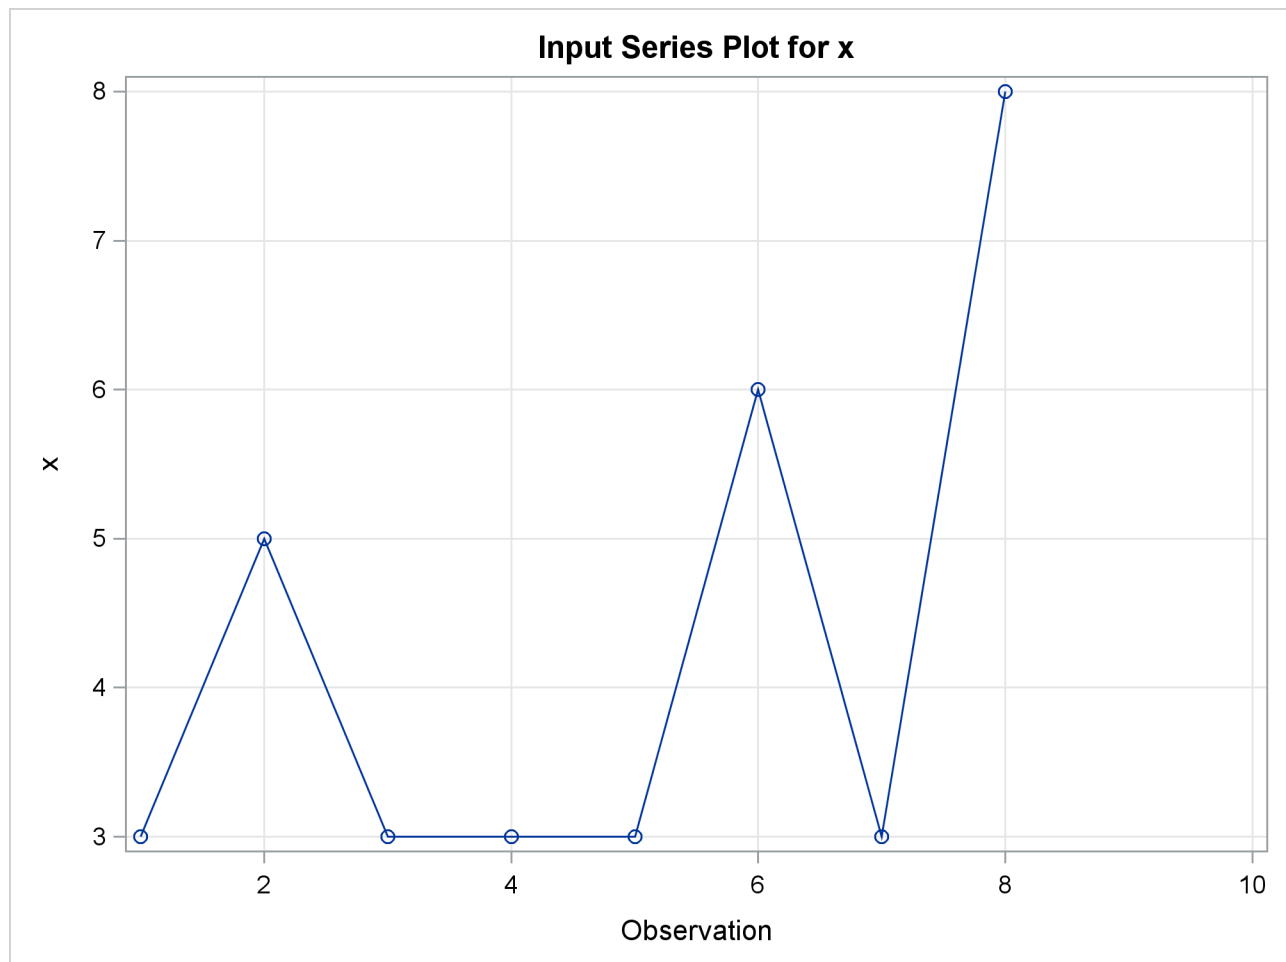
The following statements perform similarity analysis on the example data set:

```
proc similarity data=test out=_null_
  print=all plot=all;
  input x;
  target y / measure=absdev;
run;
```

The DATA=TEST option specifies that the input data set WORK.TEST is to be used in the analysis. The OUT=_NULL_ option specifies that no output time series data set is to be created. The PRINT=ALL and PLOTS=ALL options specify that all ODS tables and graphs are to be produced. The INPUT statement specifies that the input variable is X. The TARGET statement specifies that the target variable is Y and that the similarity measure is computed using absolute deviation (MEASURE=ABSDEV).

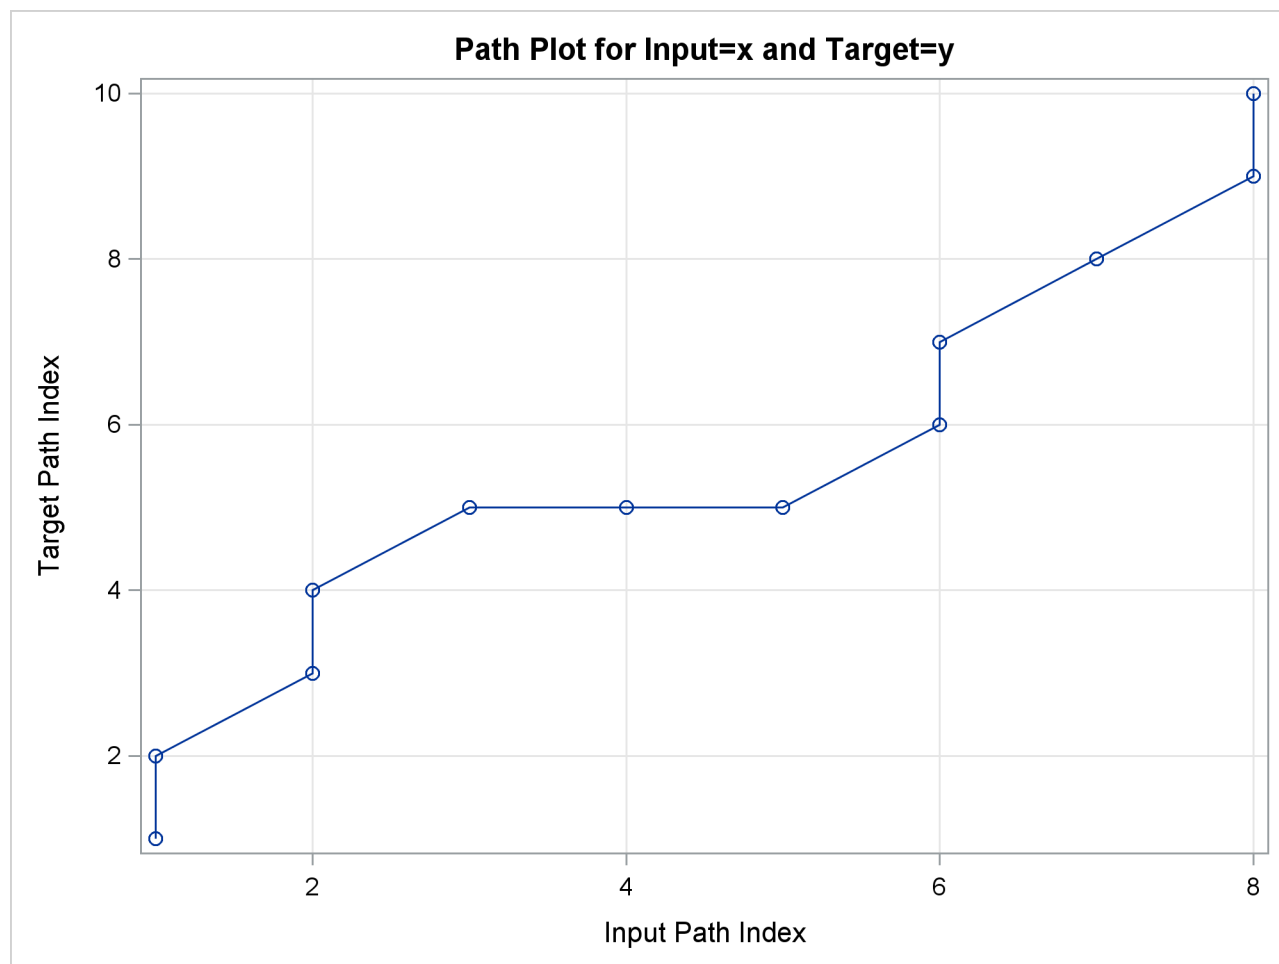
Output 24.2.1 Description Statistics of the Input Variable, x

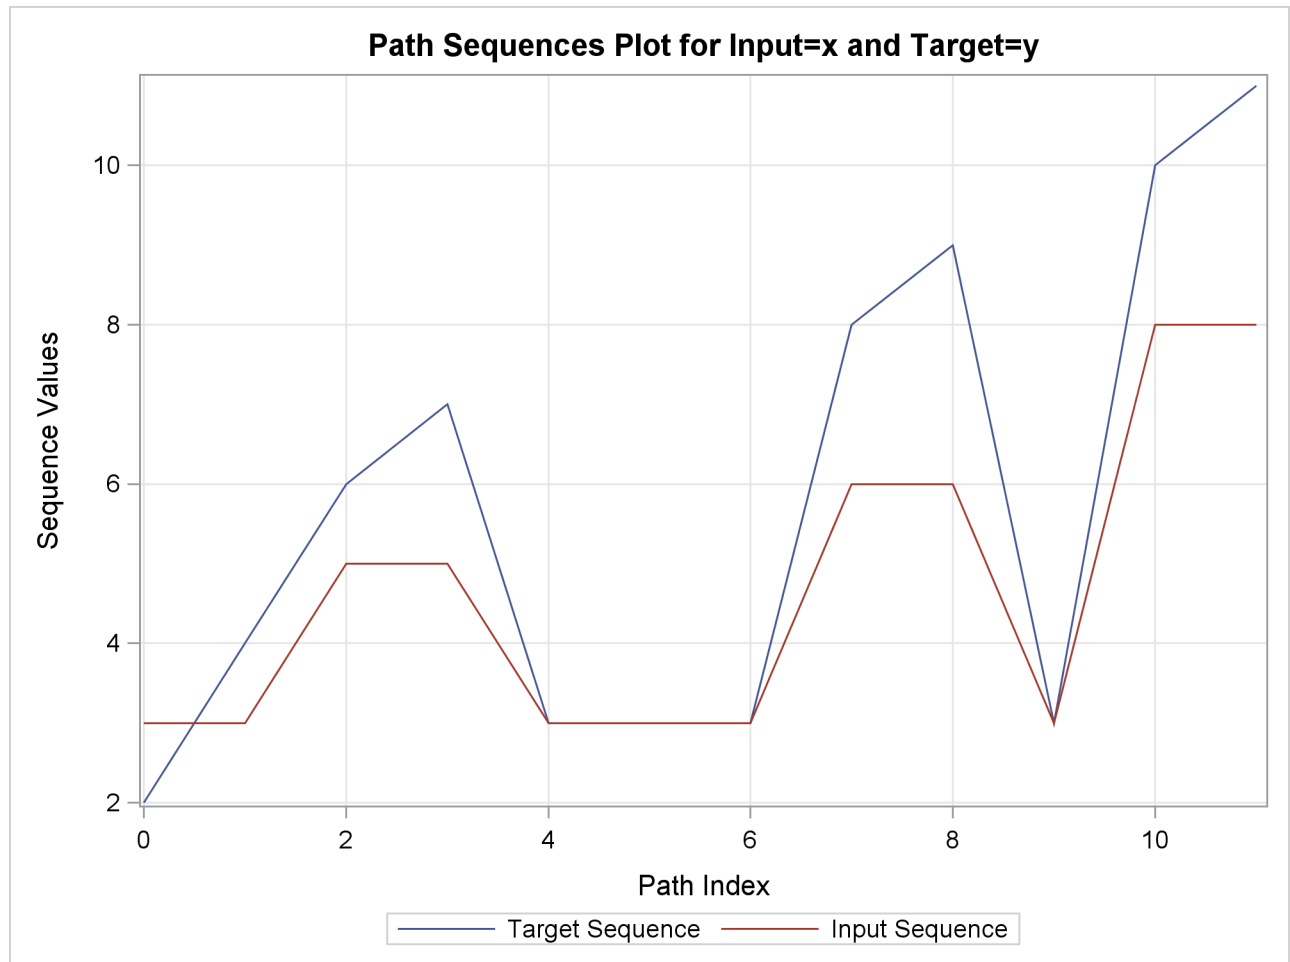
The SIMILARITY Procedure	
Time Series Descriptive Statistics	
Variable	x
Number of Observations	10
Number of Missing Observations	2
Minimum	3
Maximum	8
Mean	4.25
Standard Deviation	1.908627

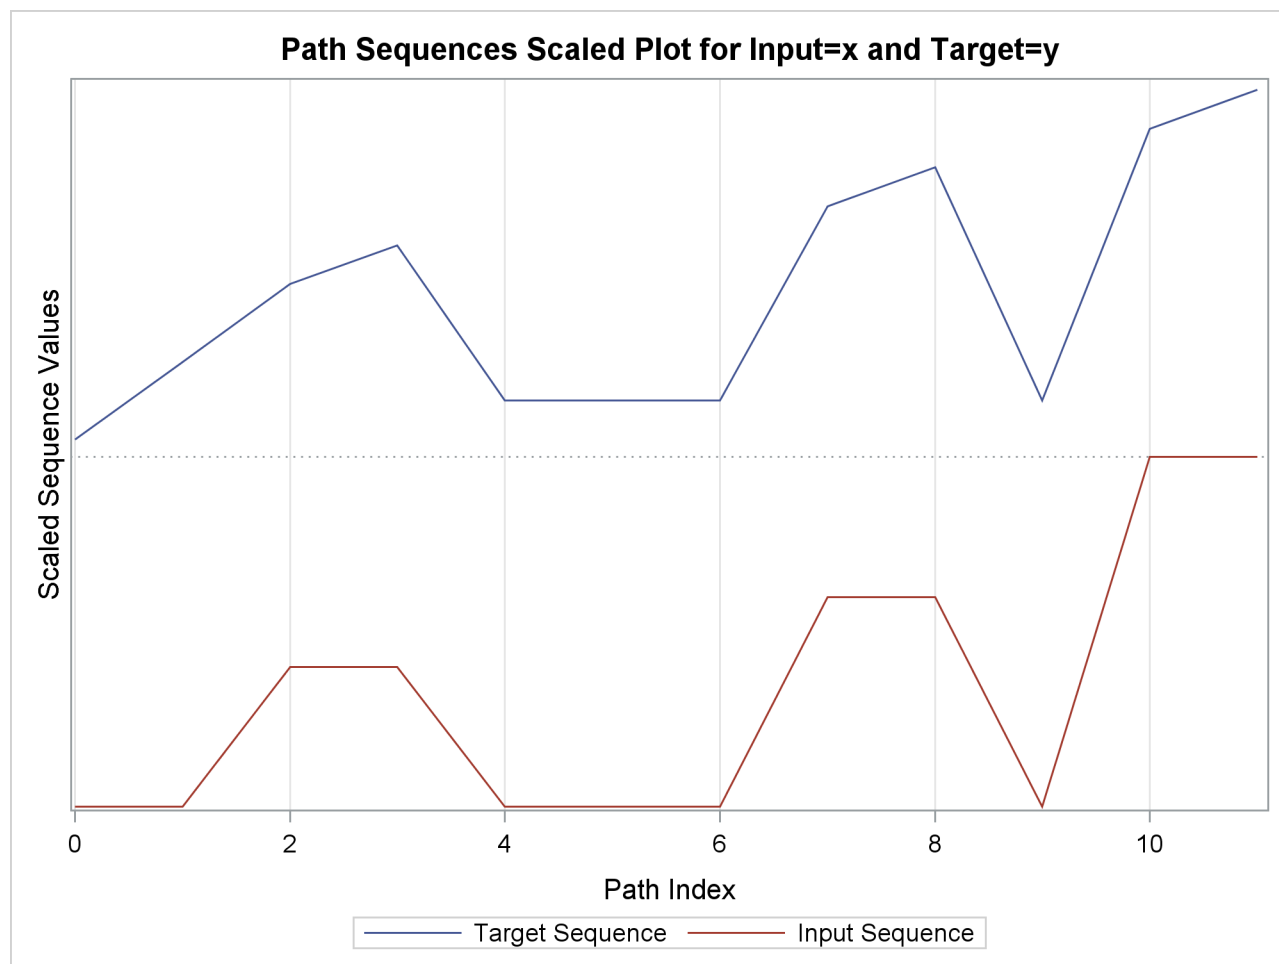
Output 24.2.2 Plot of Input Variable, x

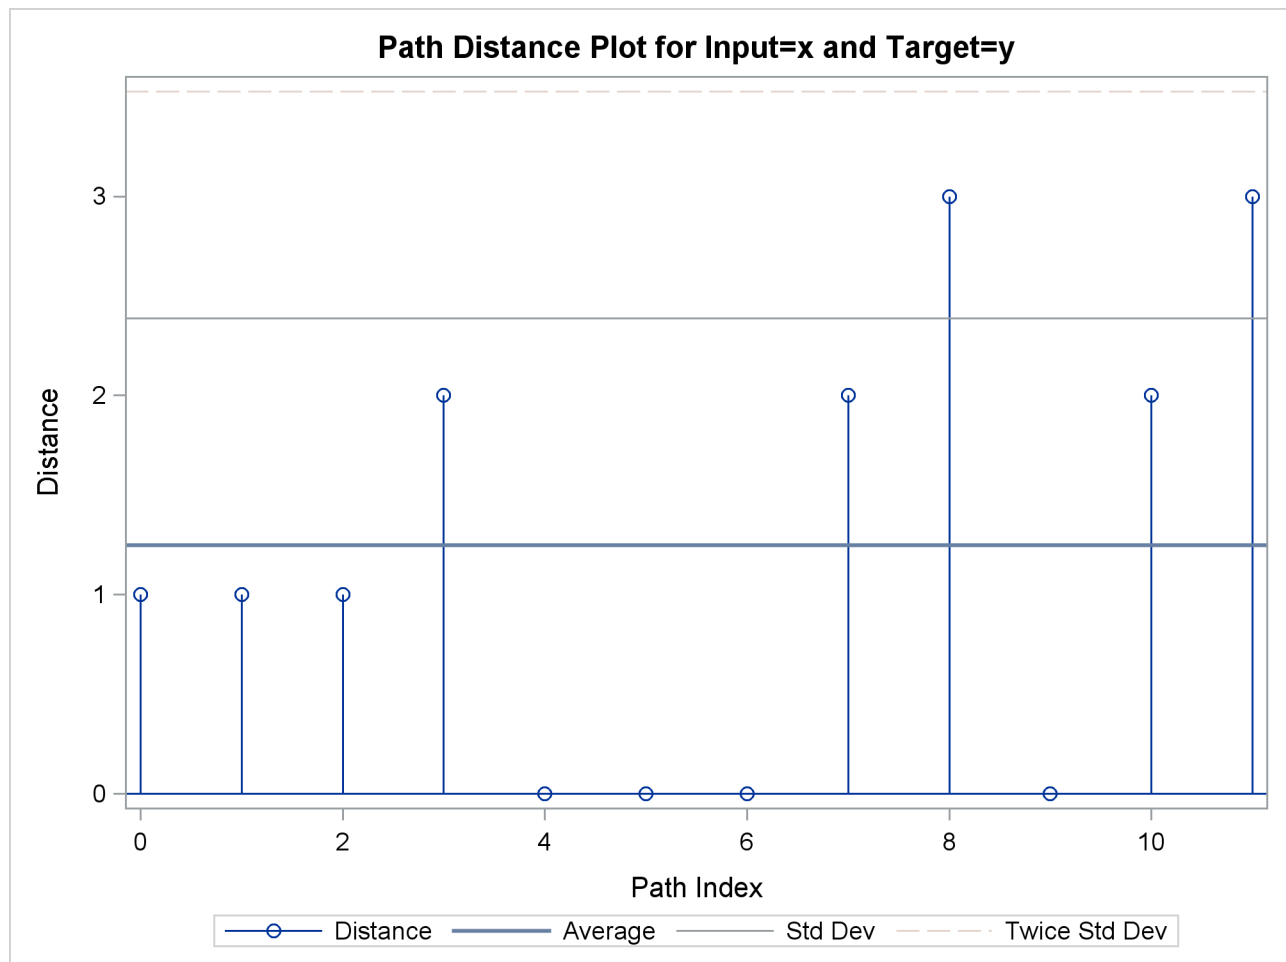
Output 24.2.3 Target Sequence Plot

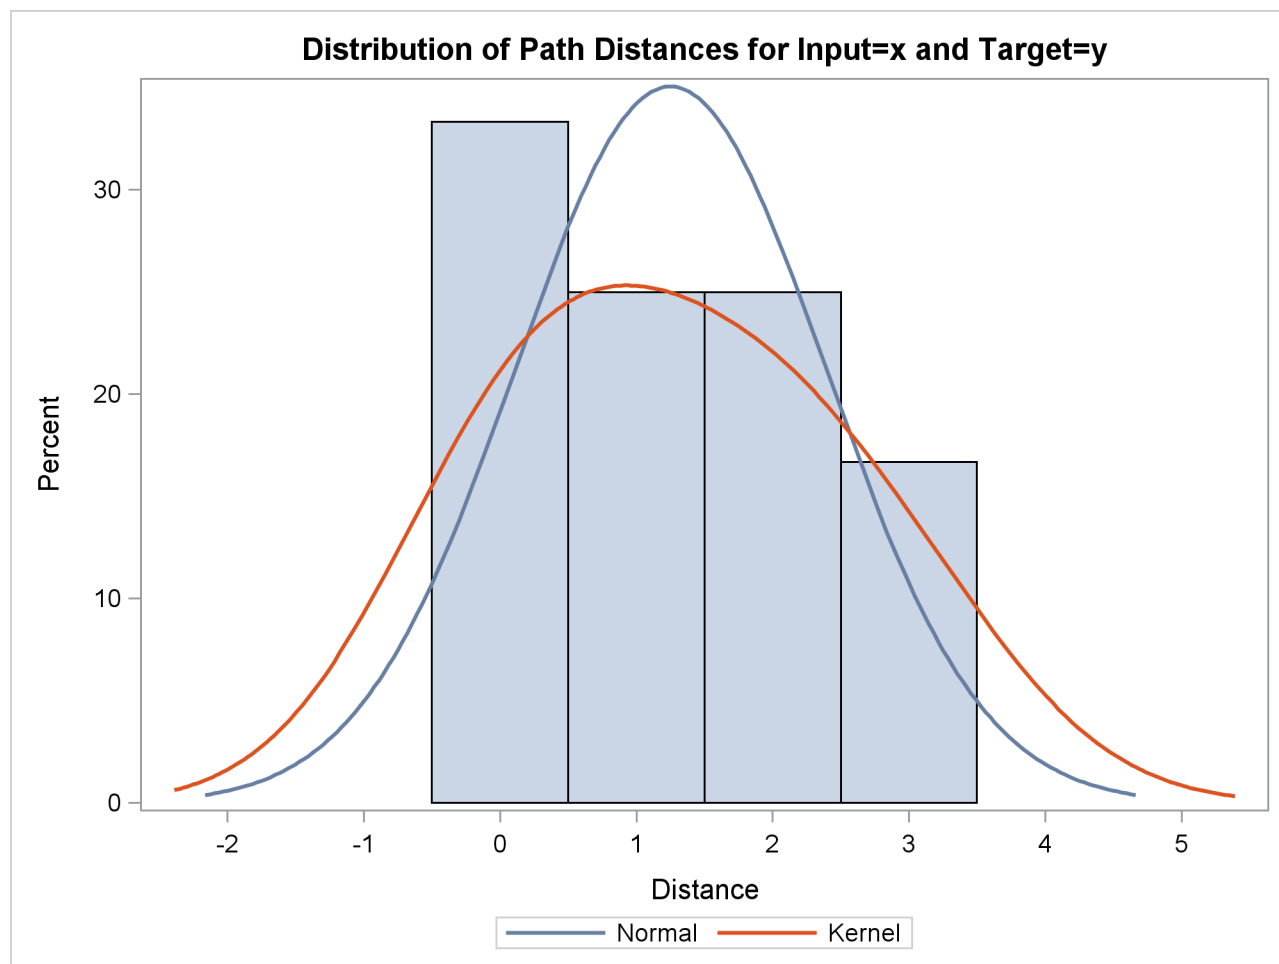
Output 24.2.4 Sequence Plot

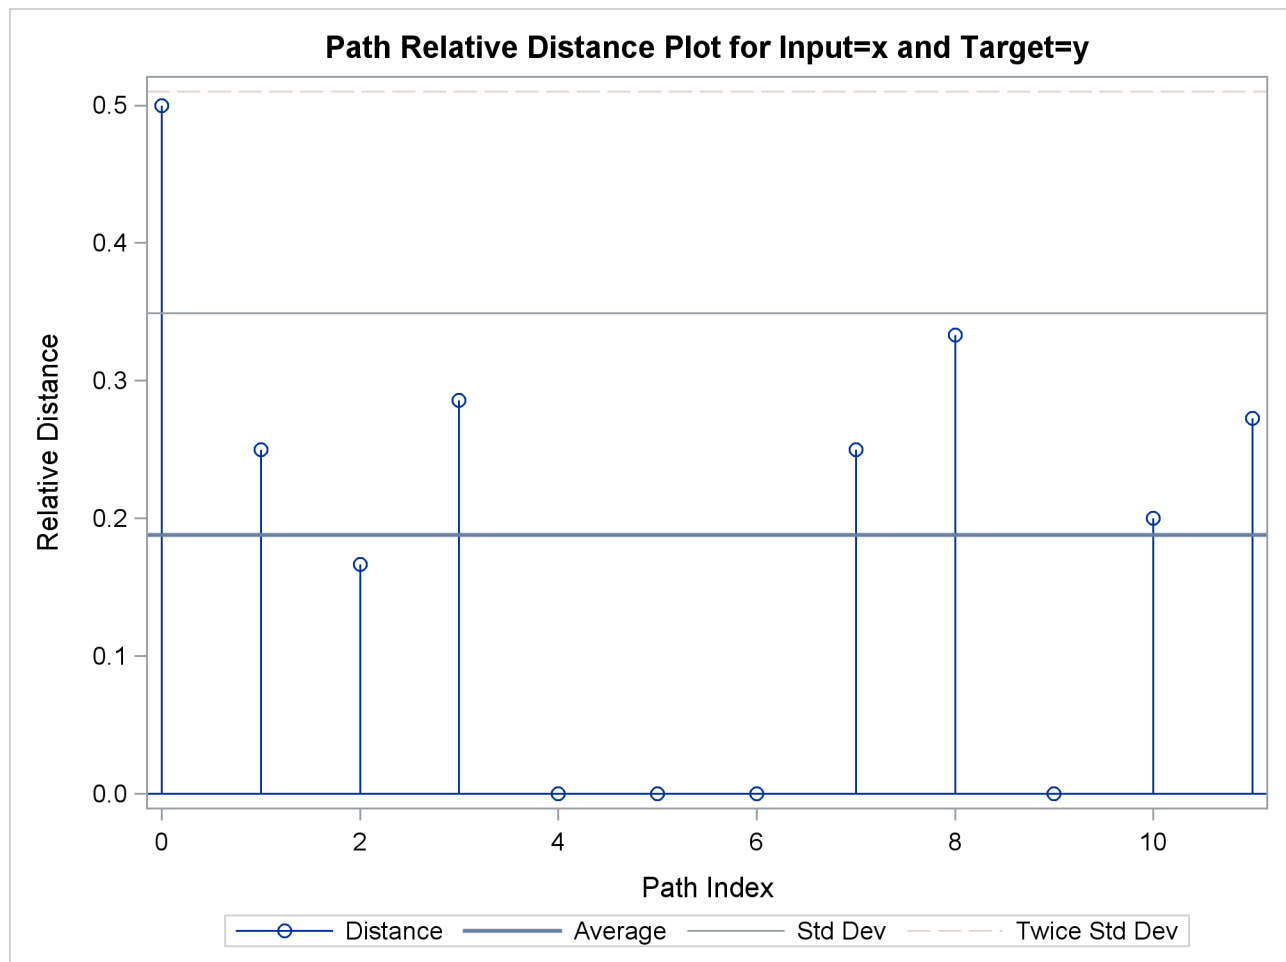
Output 24.2.5 Path Plot

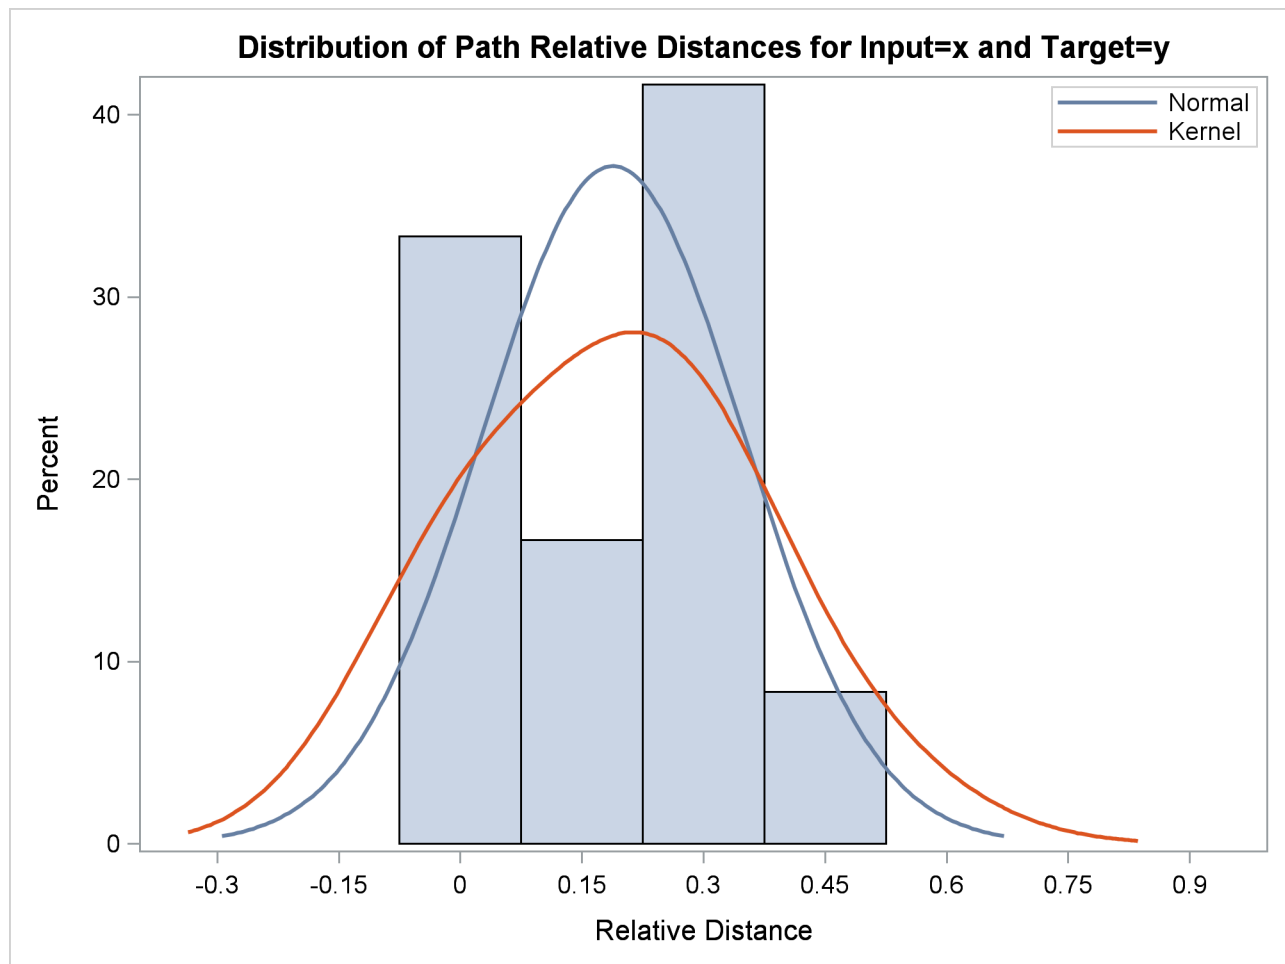
Output 24.2.6 Path Sequences Plot

Output 24.2.7 Path Sequences Scaled Plot

Output 24.2.8 Path Distance Plot

Output 24.2.9 Path Distance Histogram

Output 24.2.10 Path Relative Distance Plot

Output 24.2.11 Path Relative Distance Histogram**Output 24.2.12** Path Limits

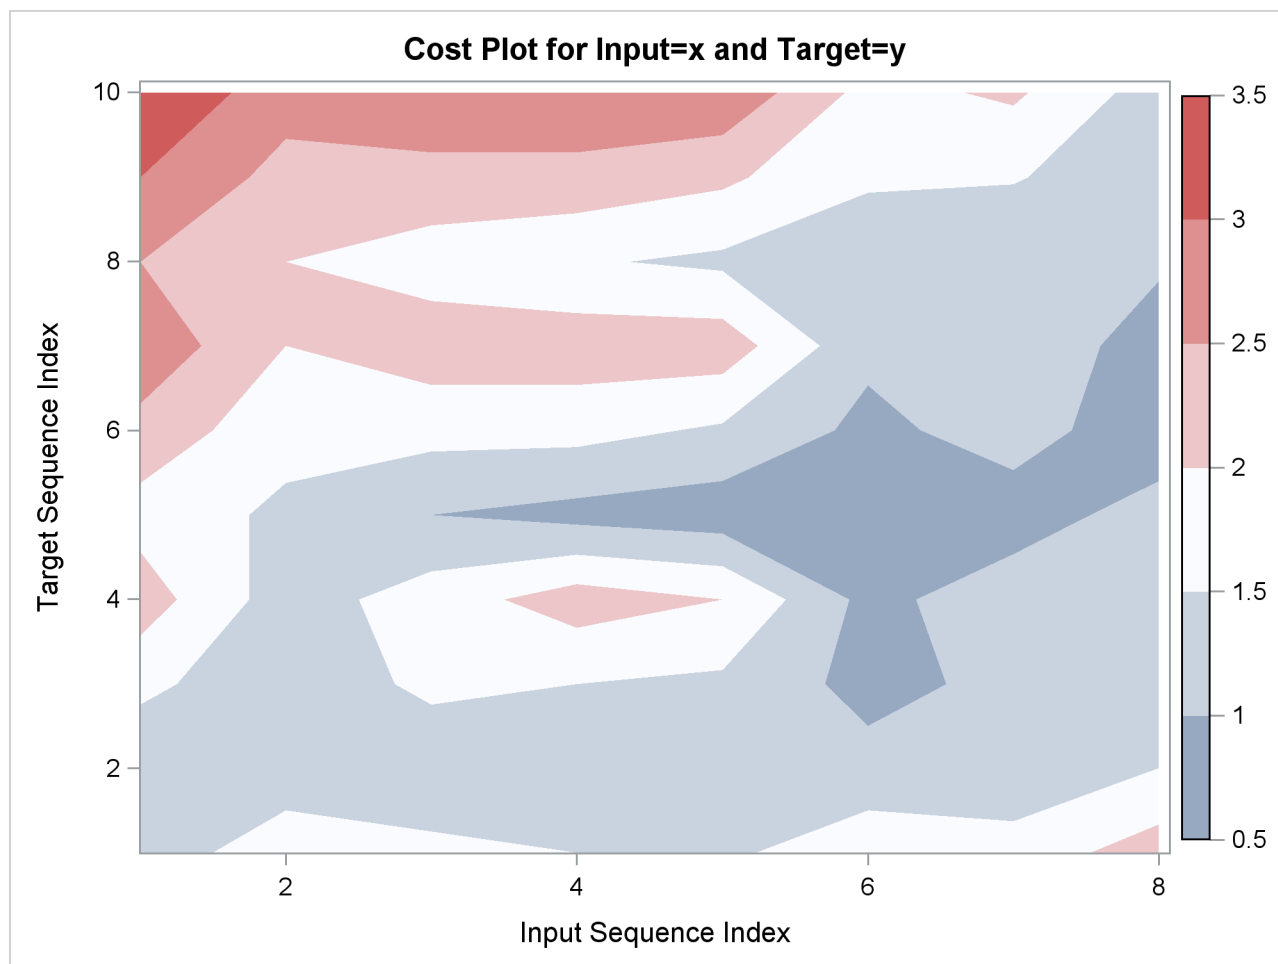
Path Limits					
Limit	Specified Absolute	Specified Percentage	Minimum Allowed	Maximum Allowed	Applied
Compression	None	None	2	9	9
Expansion	None	None	0	7	7

Output 24.2.13 Path Statistics

Path Statistics							
Path	Number	Path Percent	Input Percent	Target Percent	Maximum	Path Maximum Percent	Input Maximum Percent
Missing Map	0	0.000%	0.000%	0.000%	0	0.000%	0.000%
Direct Maps	6	50.00%	75.00%	60.00%	2	16.67%	25.00%
Compression	4	33.33%	50.00%	40.00%	1	8.333%	12.50%
Expansion	2	16.67%	25.00%	20.00%	2	16.67%	25.00%
Warps	6	50.00%	75.00%	60.00%	2	16.67%	25.00%

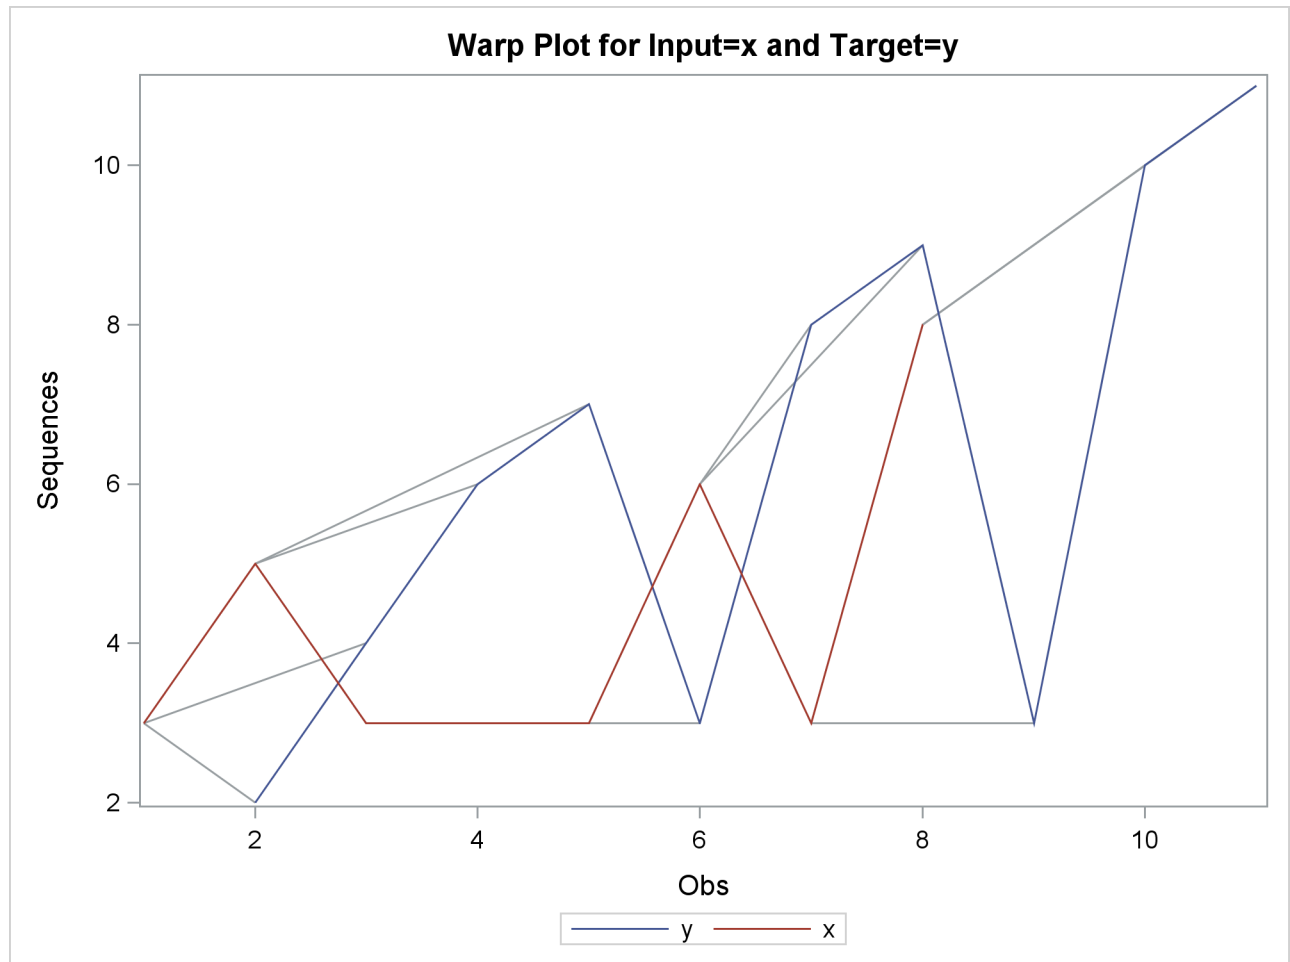
Path Statistics	
Path	Target Maximum Percent
Missing Map	0.000%
Direct Maps	20.00%
Compression	10.00%
Expansion	20.00%
Warps	20.00%

Output 24.2.14 Cost Plot



Output 24.2.15 Cost Statistics

Cost Statistics						
Cost	Number	Total	Average	Standard Deviation	Minimum	Maximum
Absolute	12	15.00000	1.250000	1.138180	0	3.000000
Relative	12	2.25844	0.188203	0.160922	0	0.500000
Cost Statistics						
Cost	Input Mean	Target Mean	Minimum Path Mean	Maximum Path Mean		
Absolute	1.875000	1.500000	1.875000	0.8823529		
Relative	0.282305	0.225844	0.282305	0.1328495		
Relative Costs based on Target Sequence values						

Output 24.2.16 Time Warp Plot

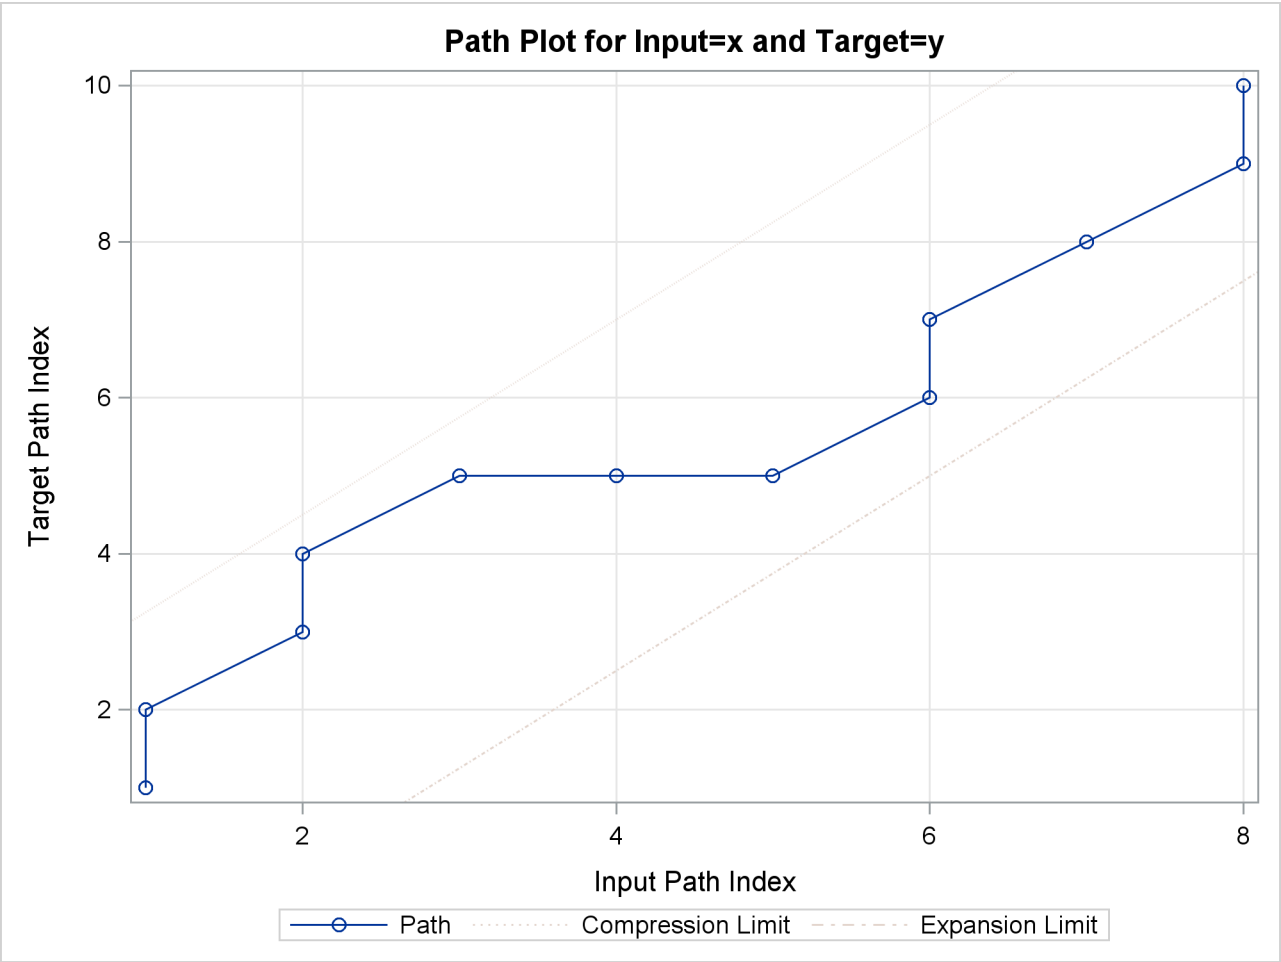
Output 24.2.17 Time Warp Scaled Plot

The following statements repeat the preceding similarity analysis on the example data set with warping limits:

```
proc similarity data=test out=_null_
  print=all plot=all;
  input x;
  target y / measure=absdev
             compress=(localabs=2)
             expand=(localabs=2);
run;
```

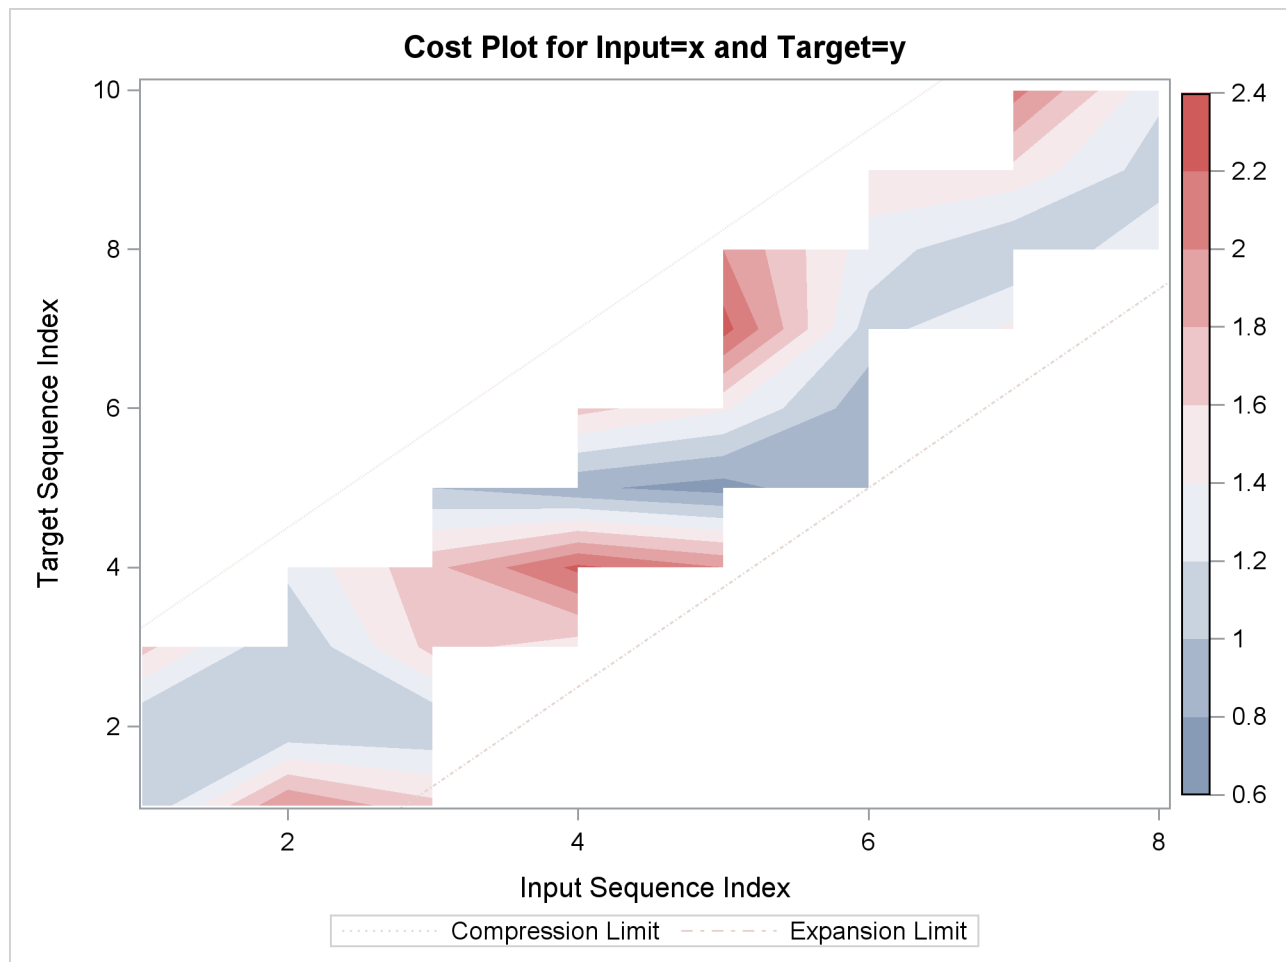
The COMPRESS=(LOCALABS=2) option limits local absolute compression to 2. The EXPAND=(LOCALABS=2) option limits local absolute expansion to 2.

Output 24.2.18 Path Plot with Warping Limits



Output 24.2.19 Warped Path Limits

Path Limits					
Limit	Specified Absolute	Specified Percentage	Minimum Allowed	Maximum Allowed	Applied
Compression	2	None	2	9	2
Expansion	2	None	0	7	2

Output 24.2.20 Cost Plot with Warping Limits

The following statements repeat the preceding similarity analysis on the example data set but store the results in output data sets:

```
proc similarity data=test out=series
  outsequence=sequences outpath=path outsum=summary;
  input x;
  target y / measure=absdev
             compress=(localabs=2)
             expand=(localabs=2);
run;
```

The OUT=SERIES, OUTSEQUENCE=SEQUENCES, OUTPATH=PATH, and OUTSUM=SUMMARY options specify that the output time series, time sequences, path analysis, and summary data sets be created, respectively.

Example 24.3: Sliding Similarity Analysis

This example illustrates how to use sliding similarity analysis to compare two time sequences. The SASHELP.WORKERS data set contains two similar time series variables (ELECTRIC and MASONRY), which represent employment over time. The following statements create an example data set that contains two time series of differing lengths, where the variable MASONRY has the first 12 and last 7 observations set to missing to simulate the lack of data associated with the target series:

```
data workers; set sashelp.workers;
  if '01JAN1978'D <= date < '01JAN1982'D then masonry = masonry;
  else masonry = .;
run;
```

The goal of sliding similarity measures analysis is find the slide index that corresponds to the most similar subsequence of the input series when compared to the target sequence. The following statements perform sliding similarity analysis on the example data set:

```
proc similarity data=workers out=_NULL_ print=(slides summary);
  id date interval=month;
  input electric;
  target masonry / slide=index measure=msqrdev
                  expand=(localabs=3 globalabs=3)
                  compress=(localabs=3 globalabs=3);
run;
```

The DATA=WORKERS option specifies that the input data set WORK.WORKERS is to be used in the analysis. The OUT=_NULL_ option specifies that no output time series data set is to be created. The PRINT=(SLIDES SUMMARY) option specifies that the ODS tables related to the sliding similarity measures and their summary be produced. The INPUT statement specifies that the input variable is ELECTRIC. The TARGET statement specifies that the target variable is MASONRY and that the similarity measure be computed using mean squared deviation (MEASURE=MSQRDEV). The SLIDE=INDEX option specifies observation index sliding. The COMPRESS=(LOCALABS=3 GLOBALABS=3) option limits local and global absolute compression to 3. The EXPAND=(LOCALABS=3 GLOBALABS=3) option limits local and global absolute expansion to 3.

Output 24.3.1 Summary of the Slide Measures

The SIMILARITY Procedure					
Slide Measures Summary for Input=ELECTRIC and Target=MASONRY					
Slide Index	DATE	Slide Target Sequence Length	Slide Input Sequence Length	Slide Warping Amount	Slide Minimum Measure
0	JAN1977	48	51	3	497.6737
1	FEB1977	48	51	1	482.6777
2	MAR1977	48	51	0	474.1251
3	APR1977	48	51	0	490.7792
4	MAY1977	48	51	-2	533.0788
5	JUN1977	48	51	-3	605.8198
6	JUL1977	48	51	-3	701.7138
7	AUG1977	48	51	3	646.5918
8	SEP1977	48	51	3	616.3258
9	OCT1977	48	51	3	510.9836
10	NOV1977	48	51	3	382.1434
11	DEC1977	48	51	3	340.4702
12	JAN1978	48	51	2	327.0572
13	FEB1978	48	51	1	322.5460
14	MAR1978	48	51	0	325.2689
15	APR1978	48	51	-1	351.4161
16	MAY1978	48	51	-2	398.0490
17	JUN1978	48	50	-3	471.6931
18	JUL1978	48	49	-3	590.8089
19	AUG1978	48	48	0	595.2538
20	SEP1978	48	47	-1	689.2233
21	OCT1978	48	46	-2	745.8891
22	NOV1978	48	45	-3	679.1907

Output 24.3.2 Minimum Measure

Minimum Measure Summary	
Input Variable	MASONRY
ELECTRIC	322.5460

This analysis results in 23 slides based on the observation index. The minimum measure (322.5460) occurs at slide index 13 which corresponds to the time value FEB1978. Note that the original data set SASHELP.WORKERS was modified beginning at the time value JAN1978. This similarity analysis justifies the belief the ELECTRIC lags MASONRY by one month based on the time series cross-correlation analysis despite the lack of target data (MASONRY).

The goal of seasonal sliding similarity measures is to find the seasonal slide index that corresponds to the most similar seasonal subsequence of the input series when compared to the target sequence. The following statements repeat the preceding similarity analysis on the example data set with seasonal sliding:

```

proc similarity data=workers out=_NULL_ print=(slides summary);
  id date interval=month;
  input electric;
  target masonry / slide=season measure=msqrdev;
run;

```

Output 24.3.3 Summary of the Seasonal Slide Measures

The SIMILARITY Procedure					
Slide Measures Summary for Input=ELECTRIC and Target=MASONRY					
Slide Index	DATE	Slide Target Sequence Length	Slide Input Sequence Length	Slide Warping Amount	Slide Minimum Measure
0	JAN1977	48	48	0	1040.086
12	JAN1978	48	48	0	641.927

Output 24.3.4 Seasonal Minimum Measure

Minimum Measure Summary	
Input Variable	MASONRY
ELECTRIC	641.9273

The analysis differs from the previous analysis in that the slides are performed based on the seasonal index (SLIDE=SEASON) with no warping. With a seasonality of 12, two seasonal slides are considered at slide indices 0 and 12 with the minimum measure (641.9273) occurring at slide index 12 which corresponds to the time value JAN1978. Note that the original data set SASHELP.WORKERS was modified beginning at the time value JAN1978. This similarity analysis justifies the belief that ELECTRIC and MASONRY have similar seasonal properties based on seasonal decomposition analysis despite the lack of target data (MASONRY).

Example 24.4: Searching for Historical Analogies

This example illustrates how to search for historical analogies by using seasonal sliding similarity analysis of transactional time-stamped data. The SASHELP.TIMEDATA data set contains the variable (VOLUME), which represents activity over time. The following statements create an example data set that contains two time series of differing lengths, where the variable HISTORY represents the historical activity and RECENT represents the more recent activity:

```

data timedata; set sashelp.timedata;
  drop volume;
  recent = .;
  history = volume;
  if datetime >= '20AUG2000:00:00:00'DT then do;
    recent = volume;
    history = .;
  end;
run;

```

The goal of seasonal sliding similarity measures is to find the seasonal slide index that corresponds to the most similar seasonal subsequence of the input series when compared to the target sequence. The following statements perform similarity analysis on the example data set with seasonal sliding:

```

proc similarity data=timedata out=_NULL_ outsequence=sequences
  outsum=summary;
  id datetime interval=dtday accumulate=total
    start='27JUL1997:00:00:00'dt
    end='21OCT2000:11:59:59'DT;
  input history / normalize=absolute;
  target recent / slide=season normalize=absolute measure=mabsdev;
run;

```

The DATA=TIMEDATA option specifies that the input data set WORK.TIMEDATA be used in the analysis. The OUT=_NULL_ option specifies that no output time series data set is to be created. The OUTSEQUENCE=SEQUENCES and OUTSUM=SUMMARY options specify the output sequences and summary data sets, respectively. The ID statement specifies that the time ID variable is DATETIME, which is to be accumulated on a daily basis (INTERVAL=DTDAY) by summing the transactions (ACCUMULATE=TOTAL). The ID statement also specifies that the data is accumulated on the weekly boundaries starting on the week of 27JUL1997 and ending on the week of 15OCT2000 (START='27JUL1997:00:00:00'DT END='21OCT2000:11:59:59'DT). The INPUT statement specifies that the input variable is HISTORY, which is to be normalized using absolute normalization (NORMALIZE=ABSOLUTE). The TARGET statement specifies that the target variable is RECENT, which is to be normalized by using absolute normalization (NORMALIZE=ABSOLUTE) and that the similarity measure be computed by using mean absolute deviation (MEASURE=MABSDEV). The SLIDE=SEASON options specifies season index sliding.

To illustrate the results of the similarity analysis, the output sequence data set must be subset by using the output summary data set.

```

data _NULL_; set summary;
  call symput('MEASURE', left(trim(putn(recent, 'BEST20.'))));
run;

data result; set sequences;
  by _SLIDE_;
  retain flag 0;
  if first._SLIDE_ then do;
    if (&measure - 0.00001 < _SIM_ < &measure + 0.00001)
      then flag = 1;
  end;
  if flag then output;
  if last._SLIDE_ then flag = 0;

```

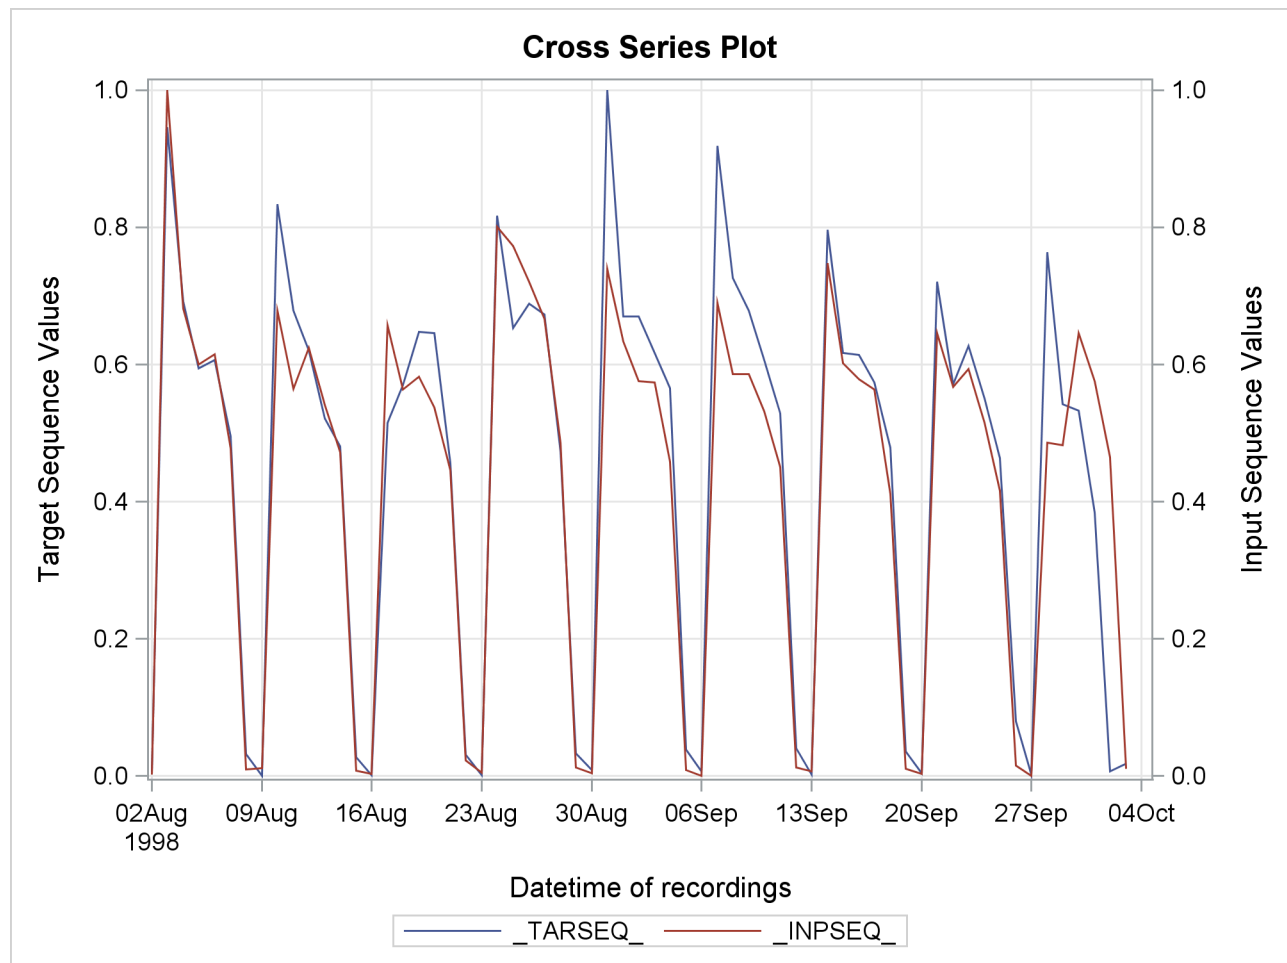
```
run;
```

The following statements generate a cross series plot of the results:

```
proc timeseries data=result out=_NULL_ crossplot=series;
  id datetime interval=dtday;
  var _TARSEQ_;
  crossvar _INPSEQ_;
run;
```

The cross series plot illustrates that the historical time series analogy most similar to the most recent time series data that started on 20AUG2000 occurred on 02AUG1998.

Output 24.4.1 Cross Series Plot of the Historical Time Series



Example 24.5: Clustering Time Series

This example illustrates how to cluster time series using a similarity matrix. The WORK.APPLIANCES data set contains 24 variables that record sales histories. The following statements create a similarity matrix and store the matrix in the WORK.SIMMATRIX data set:

```
proc similarity data=output.applianceseries out=_null_ outsum=simmatrix;  
    target units_1--units_24;  
run;
```

The following statements cluster the rows of the similarity matrix.

```
proc cluster data=simmatrix(drop=_status_) outtree=tree method=ward noprint;  
    id _input_;  
run;
```

The following statements plot the dendrogram:

```
proc tree data=tree horizontal;  
run;
```

References

- Barry, M. J. and Linoff, G. S. (1997), *Data Mining Techniques: For Marketing, Sales, and Customer Support*, New York: John Wiley & Sons.
- Han, J. and Kamber, M. (2001), *Data Mining: Concepts and Techniques*, San Francisco: Morgan Kaufmann Publishers.
- Leonard, M. J. and Wolfe, B. L. (2005), “Mining Transactional and Time Series Data,” *Proceedings of the Thirtieth Annual SAS Users Group International Conference*, Cary, NC: SAS Institute Inc.
- Leonard, M. J., Elsheimer, D. B., and Sloan, J. (2008), “An Introduction to Similarity Analysis Using SAS,” *Proceedings of the SAS Global Forum 2008 Conference*, Cary, NC: SAS Institute Inc.
- Pyle, D. (1999), *Data Preparation for Data Mining*, San Francisco: Morgan Kaufman Publishers, Inc.
- Sankoff, D. and Kruskal, J. B. (2001), *Time Warps, String Edits, and Macromolecules: The Theory and Practice of Sequence Comparison*, Stanford, CA: CSLI Publications.

Chapter 25

The SIMLIN Procedure

Contents

Overview: SIMLIN Procedure	1709
Getting Started: SIMLIN Procedure	1710
Prediction and Simulation	1711
Syntax: SIMLIN Procedure	1712
Functional Summary	1712
PROC SIMLIN Statement	1713
BY Statement	1714
ENDOGENOUS Statement	1714
EXOGENOUS Statement	1715
ID Statement	1715
LAGGED Statement	1715
OUTPUT Statement	1715
Details: SIMLIN Procedure	1716
Defining the Structural Form	1717
Computing the Reduced Form	1717
Dynamic Multipliers	1717
Multipliers for Higher Order Lags	1718
EST= Data Set	1719
DATA= Data Set	1720
OUTEST= Data Set	1720
OUT= Data Set	1721
Printed Output	1721
ODS Table Names	1723
Examples: SIMLIN Procedure	1723
Example 25.1: Simulating Klein's Model I	1723
Example 25.2: Multipliers for a Third-Order System	1732
References	1737

Overview: SIMLIN Procedure

The SIMLIN procedure reads the coefficients for a set of linear structural equations, which are usually produced by the SYSLIN procedure. PROC SIMLIN then computes the reduced form and, if input data are

given, uses the reduced form equations to generate predicted values. PROC SIMLIN is especially useful when dealing with sets of structural difference equations. The SIMLIN procedure can perform simulation or forecasting of the endogenous variables.

The SIMLIN procedure can be applied only to models that are:

- linear with respect to the parameters
- linear with respect to the variables
- square (as many equations as endogenous variables)
- nonsingular (the coefficients of the endogenous variables form an invertible matrix)

Getting Started: SIMLIN Procedure

The SIMLIN procedure processes the coefficients in a data set created by the SYSLIN procedure using the OUTEST= option or by another regression procedure such as PROC REG. To use PROC SIMLIN you must first produce the coefficient data set and then specify this data set on the EST= option of the PROC SIMLIN statement. You must also tell PROC SIMLIN which variables are endogenous and which variables are exogenous. List the endogenous variables in an ENDOGENOUS statement, and list the exogenous variables in an EXOGENOUS statement.

The following example illustrates the creation of an OUTEST= data set with PROC SYSLIN and the computation and printing of the reduced form coefficients for the model with PROC SIMLIN.

```
proc syslin data=in outest=e;
    model y1 = y2 x1;
    model y2 = y1 x2;
run;

proc simlin est=e;
    endogenous y1 y2;
    exogenous x1 x2;
run;
```

If the model contains lagged endogenous variables you must also use a LAGGED statement to tell PROC SIMLIN which variables contain lagged values, which endogenous variables they are lags of, and the number of periods of lagging. For dynamic models, the TOTAL and INTERIM= options can be used on the PROC SIMLIN statement to compute and print total and impact multipliers. (See "Dynamic Multipliers" later in this section for an explanation of multipliers.)

In the following example the variables Y1LAG1, Y2LAG1, and Y2LAG2 contain lagged values of the endogenous variables Y1 and Y2. Y1LAG1 and Y2LAG1 contain values of Y1 and Y2 for the previous observation, while Y2LAG2 contains 2 period lags of Y2. The LAGGED statement specifies the lagged relationships, and the TOTAL and INTERIM= options request multiplier analysis. The INTERIM=2 option

prints matrices showing the impact that changes to the exogenous variables have on the endogenous variables after 1 and 2 periods.

```
data in; set in;
  y1lag1 = lag(y1);
  y2lag1 = lag(y2);
  y2lag2 = lag2(y2);
run;

proc syslin data=in outest=e;
  model y1 = y2 y1lag1 y2lag2 x1;
  model y2 = y1 y2lag1 x2;
run;

proc simlin est=e total interim=2;
  endogenous y1 y2;
  exogenous x1 x2;
  lagged y1lag1 y1 1 y2lag1 y2 1 y2lag2 y2 2;
run;
```

After the reduced form of the model is computed, the model can be simulated by specifying an input data set on the PROC SIMLIN statement and using an OUTPUT statement to write the simulation results to an output data set. The following example modifies the PROC SIMLIN step from the preceding example to simulate the model and stores the results in an output data set.

```
proc simlin est=e total interim=2 data=in;
  endogenous y1 y2;
  exogenous x1 x2;
  lagged y1lag1 y1 1 y2lag1 y2 1 y2lag2 y2 2;
  output out=sim predicted=y1hat y2hat
         residual=y1resid y2resid;
run;
```

Prediction and Simulation

If an input data set is specified with the DATA= option in the PROC SIMLIN statement, the procedure reads the data and uses the reduced form equations to compute predicted and residual values for each of the endogenous variables. (If no data set is specified with the DATA= option, no simulation of the system is performed, and only the reduced form and multipliers are computed.)

The character of the prediction is based on the START= value. Until PROC SIMLIN encounters the START= observation, actual endogenous values are found and fed into the lagged endogenous terms. Once the START= observation is reached, dynamic simulation begins, where predicted values are fed into lagged endogenous terms until the end of the data set is reached.

The predicted and residual values generated here are different from those produced by the SYSLIN procedure since PROC SYSLIN uses the structural form with actual endogenous values. The predicted values

computed by the SIMLIN procedure solve the simultaneous equation system. These reduced-form predicted values are functions only of the exogenous and lagged endogenous variables and do not depend on actual values of current period endogenous variables.

Syntax: SIMLIN Procedure

The following statements can be used with PROC SIMLIN:

```
PROC SIMLIN options ;
  BY variables ;
  ENDOGENOUS variables ;
  EXOGENOUS variables ;
  ID variables ;
  LAGGED lag-var endogenous-var number ellipsis ;
  OUTPUT OUT=SAS-data-set options ;
```

Functional Summary

The statements and options controlling the SIMLIN procedure are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify input data set containing structural coefficients	PROC SIMLIN	EST=
specify type of estimates read from EST= data set	PROC SIMLIN	TYPE=
write reduced form coefficients and multipliers to an output data set	PROC SIMLIN	OUTEST=
specify the input data set for simulation	PROC SIMLIN	DATA=
write predicted and residual values to an output data set	OUTPUT	
Printing Control Options		
print the structural coefficients	PROC SIMLIN	ESTPRINT
suppress printing of reduced form coefficients	PROC SIMLIN	NORED
suppress all printed output	PROC SIMLIN	NOPRINT
Dynamic Multipliers		
compute interim multipliers	PROC SIMLIN	INTERIM=
compute total multipliers	PROC SIMLIN	TOTAL
Declaring the Role of Variables		

Description	Statement	Option
specify BY-group processing	BY	
specify the endogenous variables	ENDOGENOUS	
specify the exogenous variables	EXOGENOUS	
specify identifying variables	ID	
specify lagged endogenous variables	LAGGED	
Controlling the Simulation		
specify the starting observation for dynamic simulation	PROC SIMLIN	START=

PROC SIMLIN Statement

PROC SIMLIN *options* ;

The following options can be used in the PROC SIMLIN statement:

DATA= *SAS-data-set*

specifies the SAS data set containing input data for the simulation. If the DATA= option is used, the data set specified must supply values for all exogenous variables throughout the simulation. If the DATA= option is not specified, no simulation of the system is performed, and only the reduced form and multipliers are computed.

EST= *SAS-data-set*

specifies the input data set containing the structural coefficients of the system. If EST= is omitted the most recently created SAS data set is used. The EST= data set is normally a "TYPE=EST" data set produced by the OUTEST= option of PROC SYSLIN. However, you can also build the EST= data set with a SAS DATA step. See "The EST= Data Set" later in this chapter for details.

ESTPRINT

prints the structural coefficients read from the EST= data set.

INTERIM= *n*

requests that interim multipliers be computed for interims 1 through *n*. If not specified, no interim multipliers are computed. This feature is available only if there are no lags greater than 1.

NOPRINT

suppresses all printed output.

NORED

suppresses the printing of the reduced form coefficients.

OUTEST= *SAS-data-set*

specifies an output SAS data set to contain the reduced form coefficients and multipliers, in addition to the structural coefficients read from the EST= data set. The OUTEST= data set has the same form

as the EST= data set. If the OUTEST= option is not specified, the reduced form coefficients and multipliers are not written to a data set.

START= *n*

specifies the observation number in the DATA= data set where the dynamic simulation is to be started. By default, the dynamic simulation starts with the first observation in the DATA= data set for which all variables (including lags) are not missing.

TOTAL

requests that the total multipliers be computed. This feature is available only if there are no lags greater than 1.

TYPE= *value*

specifies the type of estimates to be read from the EST= data set. The TYPE= value must match the value of the _TYPE_ variable for the observations that you want to select from the EST= data set (TYPE=2SLS, for example).

BY Statement

BY *variables* ;

A BY statement can be used with PROC SIMLIN to obtain separate analyses for groups of observations defined by the BY variables.

The BY statement can be applied to one or both of the EST= and the DATA= input data set. When a BY statement is used and both an EST= and a DATA= input data set are specified, PROC SIMLIN checks to see if one or both of the data sets contain the BY variables.

Thus, there are three ways of using the BY statement with PROC SIMLIN:

1. If the BY variables are found in the EST= data set only, PROC SIMLIN simulates over the entire DATA= data set once for each set of coefficients read from the BY groups in the EST= data set.
2. If the BY variables are found in the DATA= data set only, PROC SIMLIN performs separate simulations over each BY group in the DATA= data set, using the single set of coefficients in the EST= data set.
3. If the BY variables are found in both the EST= and the DATA= data sets, PROC SIMLIN performs separate simulations over each BY group in the DATA= data set using the coefficients from the corresponding BY group in the EST= data set.

ENDOGENOUS Statement

ENDOGENOUS *variables* ;

List the names of the endogenous (jointly dependent) variables in the ENDOGENOUS statement. The ENDOGENOUS statement can be abbreviated as ENDOG or ENDO.

EXOGENOUS Statement

EXOGENOUS *variables ;*

List the names of the exogenous (independent) variables in the EXOGENOUS statement. The EXOGENOUS statement can be abbreviated as EXOG or EXO.

ID Statement

ID *variables ;*

The ID statement can be used to restrict the variables copied from the DATA= data set to the OUT= data set. Use the ID statement to list the variables you want copied to the OUT= data set besides the exogenous, endogenous, lagged endogenous, and BY variables. If the ID statement is omitted, all the variables in the DATA= data set are copied to the OUT= data set.

LAGGED Statement

LAGGED *lag-var endogenous-var number ellipsis ;*

For each lagged endogenous variable, specify the name of the lagged variable, the name of the endogenous variable that was lagged, and the degree of the lag. Only one LAGGED statement is allowed.

The following is an example of the use of the LAGGED statement:

```
proc simlin est=e;
  endog y1 y2;
  lagged y1lag1 y1 1 y2lag1 y2 1 y2lag3 y2 3;
run;
```

This statement specifies that the variable Y1LAG1 contains the values of the endogenous variable Y1 lagged one period; the variable Y2LAG1 refers to the values of Y2 lagged one period; and the variable Y2LAG3 refers to the values of Y2 lagged three periods.

OUTPUT Statement

OUTPUT *OUT= SAS-data-set options ;*

The OUTPUT statement specifies that predicted and residual values be put in an output data set. A DATA= input data set must be supplied if the OUTPUT statement is used, and only one OUTPUT statement is allowed. The following options can be used in the OUTPUT statement:

OUT= *SAS-data-set*

names the output SAS data set to contain the predicted values and residuals. If OUT= is not specified, the output data set is named using the DATA n convention.

PREDICTED= *names*

P= *names*

names the variables in the output data set that contain the predicted values of the simulation. These variables correspond to the endogenous variables in the order in which they are specified in the ENDOGENOUS statement. Specify up to as many names as there are endogenous variables. If you specify names on the PREDICTED= option for only some of the endogenous variables, predicted values for the remaining variables are not output. The names must not match any variable name in the input data set.

RESIDUAL= *names*

R= *names*

names the variables in the output data set that contain the residual values from the simulation. The residuals are the differences between the actual values of the endogenous variables from the DATA= data set and the predicted values from the simulation. These variables correspond to the endogenous variables in the order in which they are specified in the ENDOGENOUS statement. Specify up to as many names as there are endogenous variables. The names must not match any variable name in the input data set.

The following is an example of the use of the OUTPUT statement. This example outputs predicted values for Y1 and Y2 and outputs residuals for Y1.

```
proc simlin est=e;
  endog y1 y2;
  output out=b predicted=y1hat y2hat
          residual=y1resid;
run;
```

Details: SIMLIN Procedure

The following sections explain the structural and reduced forms, dynamic multipliers, input data sets, and the model simulation process in more detail.

Defining the Structural Form

An EST= input data set supplies the coefficients of the equation system. The data set containing the coefficients is normally a "TYPE=EST" data set created by the OUTEST= option of PROC SYSLIN or another regression procedure. The data set contains the special variables _TYPE_, _DEPVAR_, and INTERCEPT. You can also supply the structural coefficients of the system to PROC SIMLIN in a data set produced by a SAS DATA step as long as the data set is of the form TYPE=EST. Refer to SAS/STAT software documentation for a discussion of the special TYPE=EST type of SAS data set.

Suppose that there is a $g \times 1$ vector of endogenous variables \mathbf{y}_t , an $l \times 1$ vector of lagged endogenous variables \mathbf{y}_t^L , and a $k \times 1$ vector of exogenous variables \mathbf{x}_t , including the intercept. Then, there are g structural equations in the simultaneous system that can be written

$$\mathbf{G}\mathbf{y}_t = \mathbf{C}\mathbf{y}_t^L + \mathbf{B}\mathbf{x}_t$$

where \mathbf{G} is the matrix of coefficients of current period endogenous variables, \mathbf{C} is the matrix of coefficients of lagged endogenous variables, and \mathbf{B} is the matrix of coefficients of exogenous variables. \mathbf{G} is assumed to be nonsingular.

Computing the Reduced Form

First, the SIMLIN procedure computes reduced form coefficients by premultiplying by \mathbf{G}^{-1} :

$$\mathbf{y}_t = \mathbf{G}^{-1}\mathbf{C}\mathbf{y}_t^L + \mathbf{G}^{-1}\mathbf{B}\mathbf{x}_t$$

This can be written as

$$\mathbf{y}_t = \Pi_1\mathbf{y}_t^L + \Pi_2\mathbf{x}_t$$

where $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$ and $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$ are the reduced form coefficient matrices.

The reduced form matrices $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$ and $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$ are printed unless the NORED option is specified in the PROC SIMLIN statement. The structural coefficient matrices \mathbf{G} , \mathbf{C} , and \mathbf{B} are printed when the ESTPRINT option is specified.

Dynamic Multipliers

For models that have only first-order lags, the equation of the reduced form of the system can be rewritten

$$\mathbf{y}_t = \mathbf{D}\mathbf{y}_{t-1} + \Pi_2\mathbf{x}_t$$

\mathbf{D} is a matrix formed from the columns of Π_1 plus some columns of zeros, arranged in the order in which the variables meet the lags. The elements of Π_2 are called *impact multipliers* because they show the immediate

effect of changes in each exogenous variable on the values of the endogenous variables. This equation can be rewritten as

$$\mathbf{y}_t = \mathbf{D}^2 \mathbf{y}_{t-2} + \mathbf{D} \Pi_2 \mathbf{x}_{t-1} + \Pi_2 \mathbf{x}_t$$

The matrix formed by the product $\mathbf{D} \Pi_2$ shows the effect of the exogenous variables one lag back; the elements in this matrix are called *interim multipliers* and are computed and printed when the INTERIM= option is specified in the PROC SIMLIN statement. The i th period interim multipliers are formed by $\mathbf{D}^i \Pi_2$.

The series can be expanded as

$$\mathbf{y}_t = \mathbf{D}^\infty \mathbf{y}_{t-\infty} + \sum_{i=0}^{\infty} \mathbf{D}^i \Pi_2 \mathbf{x}_{t-i}$$

A permanent and constant setting of a value for x has the following cumulative effect:

$$\left(\sum_{i=0}^{\infty} \mathbf{D}^i \right) \Pi_2 \mathbf{x} = (\mathbf{I} - \mathbf{D})^{-1} \Pi_2 \mathbf{x}$$

The elements of $(\mathbf{I} - \mathbf{D})^{-1} \Pi_2$ are called the *total multipliers*. Assuming that the sum converges and that $(\mathbf{I} - \mathbf{D})$ is invertible, PROC SIMLIN computes the total multipliers when the TOTAL option is specified in the PROC SIMLIN statement.

Multipliers for Higher Order Lags

The dynamic multiplier options require the system to have no lags of order greater than one. This limitation can be circumvented, since any system with lags greater than one can be rewritten as a system where no lag is greater than one by forming new endogenous variables that are single-period lags.

For example, suppose you have the third-order single equation

$$y_t = ay_{t-3} + b\mathbf{x}_t$$

This can be converted to a first-order three-equation system by introducing two additional endogenous variables, $y_{1,t}$ and $y_{2,t}$, and computing corresponding first-order lagged variables for each endogenous variable: y_{t-1} , $y_{1,t-1}$, and $y_{2,t-1}$. The higher order lag relations are then produced by adding identities to link the endogenous and identical lagged endogenous variables:

$$y_{1,t} = y_{t-1}$$

$$y_{2,t} = y_{1,t-1}$$

$$y_t = ay_{2,t-1} + b\mathbf{x}_t$$

This conversion using the SYSLIN and SIMLIN procedures requires three steps:

1. Add the extra endogenous and lagged endogenous variables to the input data set using a DATA step. Note that two copies of each lagged endogenous variable are needed for each lag reduced, one to serve as an endogenous variable and one to serve as a lagged endogenous variable in the reduced system.
2. Add IDENTITY statements to the PROC SYSLIN step to equate each added endogenous variable to its lagged endogenous variable copy.
3. In the PROC SIMLIN step, declare the added endogenous variables in the ENDOGENOUS statement and define the lag relations in the LAGGED statement.

See [Example 25.2](#) for an illustration of how to convert an equation system with higher-order lags into a larger system with only first-order lags.

EST= Data Set

Normally, PROC SIMLIN uses an EST= data set produced by PROC SYSLIN with the OUTEST= option. This data set is in the form expected by PROC SIMLIN. If there is more than one set of estimates produced by PROC SYSLIN, you must use the TYPE= option in the PROC SIMLIN statement to select the set to be simulated. Then PROC SIMLIN reads from the EST= data set only those observations with a _TYPE_ value corresponding to the TYPE= option (for example, TYPE=2SLS) or with a _TYPE_ value of IDENTITY.

The SIMLIN procedure can only solve square, nonsingular systems. If you have fewer equations than endogenous variables, you must specify IDENTITY statements in the PROC SYSLIN step to bring the system up to full rank. If there are g endogenous variables and $m < g$ stochastic equations with unknown parameters, then you use m MODEL statements to specify the equations with parameters to be estimated and you must use $g-m$ IDENTITY statements to complete the system.

You can build your own EST= data set with a DATA step rather than use PROC SYSLIN. The EST= data set must contain the endogenous variables, the lagged endogenous variables (if any), and the exogenous variables in the system (if any). If any of the equations have intercept terms, the variable INTERCEPT must supply these coefficients. The EST= data set should also contain the special character variable comp _DEPVAR_ to label the equations.

The EST= data set must contain one observation for each equation in the system. The values of the lagged endogenous variables must contain the **C** coefficients. The values of the exogenous variables and the INTERCEPT variable must contain the **B** coefficients. The values of the endogenous variables, however, must contain the negatives of the **G** coefficients. This is because the SYSLIN procedure writes the coefficients to the OUTEST= data set in the form

$$0 = \mathbf{H}\mathbf{y}_t + \mathbf{C}\mathbf{y}_t^L + \mathbf{B}\mathbf{x}_t$$

where $\mathbf{H} = -\mathbf{G}$.

See "Multipliers for Higher Order Lags" and [Example 25.2](#) later in this chapter for more information on building the EST= data set.

DATA= Data Set

The DATA= data set must contain all of the exogenous variables. Values for all of the exogenous variables are required for each observation for which predicted endogenous values are desired. To forecast past the end of the historical data, the DATA= data set should contain nonmissing values for all of the exogenous variables and missing values for the endogenous variables for the forecast periods, in addition to the historical data. (See [Example 25.1](#) for an illustration.)

In order for PROC SIMLIN to output residuals and compute statistics of fit, the DATA= data set must also contain the endogenous variables with nonmissing actual values for each observation for which residuals and statistics are to be computed.

If the system contains lags, initial values must be supplied for the lagged variables. This can be done by including either the lagged variables or the endogenous variables, or both, in the DATA= data set. If the lagged variables are not in the DATA= data set or if they have missing values in the early observations, PROC SIMLIN prints a warning and uses the endogenous variable values from the early observations to initialize the lags.

OUTEST= Data Set

The OUTEST= data set contains all the variables read from the EST= data set. The variables in the OUTEST= data set are as follows.

- the BY statement variables, if any
- `_TYPE_`, a character variable that identifies the type of observation
- `_DEPVAR_`, a character variable containing the name of the dependent variable for the observation
- the endogenous variables
- the lagged endogenous variables
- the exogenous variables
- INTERCEPT, a numeric variable containing the intercept values
- `_MODEL_`, a character variable containing the name of the equation
- `_SIGMA_`, a numeric variable containing the estimated error variance of the equation (output only if present in the EST= data set)

The observations read from the EST= data set that supply the structural coefficients are copied to the OUTEST= data set, except that the signs of endogenous coefficients are reversed. For these observations, the `_TYPE_` variable values are the same as in the EST= data set.

In addition, the OUTEST= data set contains observations with the following `_TYPE_` values:

REDUCED	the reduced form coefficients. The endogenous variables for this group of observations contain the inverse of the endogenous coefficient matrix \mathbf{G} . The lagged endogenous variables contain the matrix $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$. The exogenous variables contain the matrix $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$.
IMULT <i>i</i>	the interim multipliers, if the INTERIM= option is specified. There are gn observations for the interim multipliers, where g is the number of endogenous variables and n is the value of the INTERIM= n option. For these observations the _TYPE_ variable has the value IMULT <i>i</i> , where the interim number i ranges from 1 to n . The exogenous variables in groups of g observations that have a _TYPE_ value of IMULT <i>i</i> contain the matrix $\mathbf{D}^i \Pi_2$ of multipliers at interim i . The endogenous and lagged endogenous variables for this group of observations are set to missing.
TOTAL	the total multipliers, if the TOTAL option is specified. The exogenous variables in this group of observations contain the matrix $(\mathbf{I} - \mathbf{D})^{-1} \Pi_2$. The endogenous and lagged endogenous variables for this group of observations are set to missing.

OUT= Data Set

The OUT= data set normally contains all of the variables in the input DATA= data set, plus the variables named in the PREDICTED= and RESIDUAL= options in the OUTPUT statement.

You can use an ID statement to restrict the variables that are copied from the input data set. If an ID statement is used, the OUT= data set contains only the BY variables (if any), the ID variables, the endogenous and lagged endogenous variables (if any), the exogenous variables, plus the PREDICTED= and RESIDUAL= variables.

The OUT= data set contains an observation for each observation in the DATA= data set. When the actual value of an endogenous variable is missing in the DATA= data set, or when the DATA= data set does not contain the endogenous variable, the corresponding residual is missing.

Printed Output

Structural Form

The following items are printed as they are read from the EST= input data set. Structural zeros are printed as dots in the listing of these matrices.

1. Structural Coefficients for Endogenous Variables. This is the \mathbf{G} matrix, with g rows and g columns.
2. Structural Coefficients for Lagged Endogenous Variables. These coefficients make up the \mathbf{C} matrix, with g rows and l columns.
3. Structural Coefficients for Exogenous Variables. These coefficients make up the \mathbf{B} matrix, with g rows and k columns.

Reduced Form

1. The reduced form coefficients are obtained by inverting \mathbf{G} so that the endogenous variables can be directly expressed as functions of only lagged endogenous and exogenous variables.
2. Inverse Coefficient Matrix for Endogenous Variables. This is the inverse of the \mathbf{G} matrix.
3. Reduced Form for Lagged Endogenous Variables. This is $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$, with g rows and l columns. Each value is a dynamic multiplier that shows how past values of lagged endogenous variables affect values of each of the endogenous variables.
4. Reduced Form for Exogenous Variables. This is $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$, with g rows and k columns. Its values are called *impact multipliers* because they show the immediate effect of each exogenous variable on the value of the endogenous variables.

Multipliers

Interim and total multipliers show the effect of a change in an exogenous variable over time.

1. Interim Multipliers. These are the interim multiplier matrices. They are formed by multiplying Π_2 by powers of \mathbf{D} . The d th interim multiplier is $\mathbf{D}^d \Pi_2$. The interim multiplier of order d shows the effects of a change in the exogenous variables after d periods. Interim multipliers are only available if the maximum lag of the endogenous variables is 1.
2. Total Multipliers. This is the matrix of total multipliers, $\mathbf{T} = (\mathbf{I} - \mathbf{D})^{-1} \Pi_2$. This matrix shows the cumulative effect of changes in the exogenous variables. Total multipliers are only available if the maximum lag is one.

Statistics of Fit

If the DATA= option is used and the DATA= data set contains endogenous variables, PROC SIMLIN prints a statistics-of-fit report for the simulation. The statistics printed include the following. (Summations are over the observations for which both y_t and \hat{y}_t are nonmissing.)

1. the number of nonmissing errors. (Number of observations for which both y_t and \hat{y}_t are nonmissing.)
2. the mean error: $\frac{1}{n} \sum (y_t - \hat{y}_t)$
3. the mean percent error: $\frac{100}{n} \sum \frac{(y_t - \hat{y}_t)}{y_t}$
4. the mean absolute error: $\frac{1}{n} \sum |y_t - \hat{y}_t|$
5. the mean absolute percent error: $\frac{100}{n} \sum \frac{|y_t - \hat{y}_t|}{y_t}$
6. the root mean square error: $\sqrt{\frac{1}{n} \sum (y_t - \hat{y}_t)^2}$
7. the root mean square percent error: $\sqrt{\frac{100}{n} \sum \left(\frac{(y_t - \hat{y}_t)}{y_t}\right)^2}$

ODS Table Names

PROC SIMLIN assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 25.2 ODS Tables Produced in PROC SIMLIN

ODS Table Name	Description	Option
Endogenous	Structural Coefficients for Endogenous Variables	default
LaggedEndogenous	Structural Coefficients for Lagged Endogenous Variables	default
Exogenous	Structural Coefficients for Exogenous Variables	default
InverseCoeff	Inverse Coefficient Matrix for Endogenous Variables	default
RedFormLagEndo	Reduced Form for Lagged Endogenous Variables	default
RedFormExog	Reduced Form for Exogenous Variables	default
InterimMult	Interim Multipliers	INTERIM= option
TotalMult	Total Multipliers	TOTAL= option
FitStatistics	Fit statistics	default

Examples: SIMLIN Procedure

Example 25.1: Simulating Klein's Model I

In this example, the SIMLIN procedure simulates a model of the U.S. economy called Klein's Model I. The SAS data set KLEIN is used as input to the SYSLIN and SIMLIN procedures.

```
data klein;
  input year c p w i x wp g t k wsum;
  date=mdy(1,1,year);
  format date year.;
  y  = c + i + g - t;
  yr = year - 1931;
  klag = lag( k );
  plag = lag( p );
```

```

xlag = lag( x );
if year >= 1921;
label c   ='consumption'
      p   ='profits'
      w   ='private wage bill'
      i   ='investment'
      k   ='capital stock'
      y   ='national income'
      x   ='private production'
      wsum='total wage bill'
      wp  ='govt wage bill'
      g   ='govt demand'
      t   ='taxes'
      klag='capital stock lagged'
      plag='profits lagged'
      xlag='private product lagged'
      yr  ='year-1931';
datalines;
1920      .   12.7      .      .   44.9      .      .      .   182.8      .

... more lines ...

```

First, the model is specified and estimated using the SYSLIN procedure, and the parameter estimates are written to an OUTEST= data set. The printed output produced by the SYSLIN procedure is not shown here; see [Example 29.1](#) in [Chapter 29](#) for the printed output of the PROC SYSLIN step.

```

title1 'Simulation of Klein''s Model I using SIMLIN';
proc syslin 3sls data=klein outest=a;

instruments klag plag xlag wp g t yr;
endogenous c p w i x wsum k y;

consume: model      c = p plag wsum;
invest:  model      i = p plag klag;
labor:   model      w = x xlag yr;

product: identity x = c + i + g;
income:  identity y = c + i + g - t;
profit:  identity p = x - w - t;
stock:   identity k = klag + i;
wage:    identity wsum = w + wp;

run;

```

The OUTEST= data set A created by the SYSLIN procedure contains parameter estimates to be used by the SIMLIN procedure. The OUTEST= data set is shown in [Output 25.1.1](#).

Output 25.1.1 The OUTEST= Data Set Created by PROC SYSLIN

Simulation of Klein's Model I using SIMLIN										
						I				
						n				
						t				
						e				
						r				
						c	k	p	x	
O	P	U	E	A	M	e	l	l	l	
b	E	S	L	R	A	p	a	a	a	
s	-	-	-	-	-	t	g	g	g	
1	INST	0	Converged	FIRST	c	2.11403	58.3018	-0.14654	0.74803	0.23007
2	INST	0	Converged	FIRST	p	2.18298	50.3844	-0.21610	0.80250	0.02200
3	INST	0	Converged	FIRST	w	1.75427	43.4356	-0.12295	0.87192	0.09533
4	INST	0	Converged	FIRST	i	1.72376	35.5182	-0.19251	0.92639	-0.11274
5	INST	0	Converged	FIRST	x	3.77347	93.8200	-0.33906	1.67442	0.11733
6	INST	0	Converged	FIRST	wsum	1.75427	43.4356	-0.12295	0.87192	0.09533
7	INST	0	Converged	FIRST	k	1.72376	35.5182	0.80749	0.92639	-0.11274
8	INST	0	Converged	FIRST	y	3.77347	93.8200	-0.33906	1.67442	0.11733
9	3SLS	0	Converged	CONSUME	c	1.04956	16.4408	.	0.16314	.
10	3SLS	0	Converged	INVEST	i	1.60796	28.1778	-0.19485	0.75572	.
11	3SLS	0	Converged	LABOR	w	0.80149	1.7972	.	.	0.18129
12	IDENTITY	0	Converged	PRODUCT	x	.	0.0000	.	.	.
13	IDENTITY	0	Converged	INCOME	y	.	0.0000	.	.	.
14	IDENTITY	0	Converged	PROFIT	p	.	0.0000	.	.	.
15	IDENTITY	0	Converged	STOCK	k	.	0.0000	1.00000	.	.
16	IDENTITY	0	Converged	WAGE	wsum	.	0.0000	.	.	.
O										w
b	w									s
s	p	g	t	y	c	p	w	i	x	u
										m
1	0.19327	0.20501	-0.36573	0.70109	-1
2	-0.07961	0.43902	-0.92310	0.31941	.	-1.00000
3	-0.44373	0.86622	-0.60415	0.71358	.	.	-1	.	.	.
4	-0.71661	0.10023	-0.16152	0.33190	.	.	.	-1	.	.
5	-0.52334	1.30524	-0.52725	1.03299	-1.00000	.
6	0.55627	0.86622	-0.60415	0.71358	-1.00000
7	-0.71661	0.10023	-0.16152	0.33190	-1
8	-0.52334	1.30524	-1.52725	1.03299	-1
9	-1	0.12489	.	.	.	0.79008
10	-0.01308	.	-1	.	.
11	.	.	.	0.14967	.	.	-1	.	0.40049	.
12	.	1.00000	.	.	1	.	.	1	-1.00000	.
13	.	1.00000	-1.00000	.	1	.	.	1	.	-1
14	.	.	-1.00000	.	.	-1.00000	-1	.	1.00000	.
15	1	.	-1
16	1.00000	1	.	-1.00000	.

Using the OUTEST= data set A produced by the SYSLIN procedure, the SIMLIN procedure can now compute the reduced form and simulate the model. The following statements perform the simulation.

```

title1 'Simulation of Klein''s Model I using SIMLIN';
proc simlin data=klein
    est=a type=3sls
    estprint
    total interim=2
    outest=b;
    endogenous c p w i x wsum k y;
    exogenous wp g t yr;
    lagged klag k 1   plag p 1   xlag x 1;
    id year;
    output out=c p=chat phat what ihat xhat wsumhat khat yhat
           r=cres pres wres ires xres wsumres kres yres;
run;

```

The reduced form coefficients and multipliers are added to the information read from EST= data set A and written to the OUTEST= data set B. The predicted and residual values from the simulation are written to the OUT= data set C specified in the OUTPUT statement.

The SIMLIN procedure first prints the structural coefficient matrices read from the EST= data set, as shown in [Output 25.1.2](#) through [Output 25.1.4](#).

Output 25.1.2 SIMLIN Procedure Output – Endogenous Structural Coefficients

Simulation of Klein's Model I using SIMLIN				
The SIMLIN Procedure				
Structural Coefficients for Endogenous Variables				
Variable	c	p	w	i
c	1.0000	-0.1249	.	.
i	.	0.0131	.	1.0000
w	.	.	1.0000	.
x	-1.0000	.	.	-1.0000
y	-1.0000	.	.	-1.0000
p	.	1.0000	1.0000	.
k	.	.	.	-1.0000
wsum	.	.	-1.0000	.
Structural Coefficients for Endogenous Variables				
Variable	x	wsum	k	y
c	.	-0.7901	.	.
i
w	-0.4005	.	.	.
x	1.0000	.	.	.
y	.	.	.	1.0000
p	-1.0000	.	.	.
k	.	.	1.0000	.
wsum	.	1.0000	.	.

Output 25.1.3 SIMLIN Procedure Output – Lagged Endogenous Structural Coefficients

Structural Coefficients for Lagged Endogenous Variables			
Variable	klag	plag	xlag
c	.	0.1631	.
i	-0.1948	0.7557	.
w	.	.	0.1813
x	.	.	.
y	.	.	.
p	.	.	.
k	1.0000	.	.
wsum	.	.	.

Output 25.1.4 SIMLIN Procedure Output – Exogenous Structural Coefficients

Structural Coefficients for Exogenous Variables					
Variable	wp	g	t	yr	Intercept
c	16.4408
i	28.1778
w	.	.	.	0.1497	1.7972
x	.	1.0000	.	.	0
y	.	1.0000	-1.0000	.	0
p	.	.	-1.0000	.	0
k	0
wsum	1.0000	.	.	.	0

The SIMLIN procedure then prints the inverse of the endogenous variables coefficient matrix, as shown in [Output 25.1.5](#).

Output 25.1.5 SIMLIN Procedure Output – Inverse Coefficient Matrix

Inverse Coefficient Matrix for Endogenous Variables				
Variable	c	i	w	x
c	1.6347	0.6347	1.0957	0.6347
p	0.9724	0.9724	-0.3405	0.9724
w	0.6496	0.6496	1.4406	0.6496
i	-0.0127	0.9873	0.004453	-0.0127
x	1.6219	1.6219	1.1001	1.6219
wsun	0.6496	0.6496	1.4406	0.6496
k	-0.0127	0.9873	0.004453	-0.0127
y	1.6219	1.6219	1.1001	0.6219

Inverse Coefficient Matrix for Endogenous Variables				
Variable	y	p	k	wsun
c	0	0.1959	0	1.2915
p	0	1.1087	0	0.7682
w	0	0.0726	0	0.5132
i	0	-0.0145	0	-0.0100
x	0	0.1814	0	1.2815
wsun	0	0.0726	0	1.5132
k	0	-0.0145	1.0000	-0.0100
y	1.0000	0.1814	0	1.2815

The SIMLIN procedure next prints the reduced form coefficient matrices, as shown in [Output 25.1.6](#).

Output 25.1.6 SIMLIN Procedure Output – Reduced Form Coefficients

Reduced Form for Lagged Endogenous Variables			
Variable	k _{lag}	p _{lag}	x _{lag}
c	-0.1237	0.7463	0.1986
p	-0.1895	0.8935	-0.0617
w	-0.1266	0.5969	0.2612
i	-0.1924	0.7440	0.000807
x	-0.3160	1.4903	0.1994
wsun	-0.1266	0.5969	0.2612
k	0.8076	0.7440	0.000807
y	-0.3160	1.4903	0.1994

Output 25.1.6 *continued*

Reduced Form for Exogenous Variables					
Variable	wp	g	t	yr	Intercept
c	1.2915	0.6347	-0.1959	0.1640	46.7273
p	0.7682	0.9724	-1.1087	-0.0510	42.7736
w	0.5132	0.6496	-0.0726	0.2156	31.5721
i	-0.0100	-0.0127	0.0145	0.000667	27.6184
x	1.2815	1.6219	-0.1814	0.1647	74.3457
wsun	1.5132	0.6496	-0.0726	0.2156	31.5721
k	-0.0100	-0.0127	0.0145	0.000667	27.6184
y	1.2815	1.6219	-1.1814	0.1647	74.3457

The multiplier matrices (requested by the INTERIM=2 and TOTAL options) are printed next, as shown in [Output 25.1.7](#) and [Output 25.1.8](#).

Output 25.1.7 SIMLIN Procedure Output – Interim Multipliers

Interim Multipliers for Interim 1					
Variable	wp	g	t	yr	Intercept
c	0.829130	1.049424	-0.865262	-.0054080	43.27442
p	0.609213	0.771077	-0.982167	-.0558215	28.39545
w	0.794488	1.005578	-0.710961	0.0125018	41.45124
i	0.574572	0.727231	-0.827867	-.0379117	26.57227
x	1.403702	1.776655	-1.693129	-.0433197	69.84670
wsun	0.794488	1.005578	-0.710961	0.0125018	41.45124
k	0.564524	0.714514	-0.813366	-.0372452	54.19068
y	1.403702	1.776655	-1.693129	-.0433197	69.84670
Interim Multipliers for Interim 2					
Variable	wp	g	t	yr	Intercept
c	0.663671	0.840004	-0.968727	-.0456589	28.36428
p	0.350716	0.443899	-0.618929	-.0401446	10.79216
w	0.658769	0.833799	-0.925467	-.0399178	28.33114
i	0.345813	0.437694	-0.575669	-.0344035	10.75901
x	1.009485	1.277698	-1.544396	-.0800624	39.12330
wsun	0.658769	0.833799	-0.925467	-.0399178	28.33114
k	0.910337	1.152208	-1.389035	-.0716486	64.94969
y	1.009485	1.277698	-1.544396	-.0800624	39.12330

Output 25.1.8 SIMLIN Procedure Output – Total Multipliers

Total Multipliers					
Variable	wp	g	t	yr	Intercept
c	1.881667	1.381613	-0.685987	0.1789624	41.3045
p	0.786945	0.996031	-1.286891	-.0748290	15.4770
w	1.094722	1.385582	-0.399095	0.2537914	25.8275
i	0.000000	0.000000	-0.000000	0.0000000	0.0000
x	1.881667	2.381613	-0.685987	0.1789624	41.3045
wsum	2.094722	1.385582	-0.399095	0.2537914	25.8275
k	2.999365	3.796275	-4.904859	-.2852032	203.6035
y	1.881667	2.381613	-1.685987	0.1789624	41.3045

The last part of the SIMLIN procedure output is a table of statistics of fit for the simulation, as shown in [Output 25.1.9](#).

Output 25.1.9 SIMLIN Procedure Output – Simulation Statistics

Fit Statistics							
Variable	N	Mean Error	Mean Pct Error	Mean Abs Error	Mean Abs Pct Error	RMS Error	RMS Pct Error
c	21	0.1367	-0.3827	3.5011	6.69769	4.3155	8.1701
p	21	0.1422	-4.0671	2.9355	19.61400	3.4257	26.0265
w	21	0.1282	-0.8939	3.1247	8.92110	4.0930	11.4709
i	21	0.1337	105.8529	2.4983	127.13736	2.9980	252.3497
x	21	0.2704	-0.9553	5.9622	10.40057	7.1881	12.5653
wsum	21	0.1282	-0.6669	3.1247	7.88988	4.0930	10.1724
k	21	-0.1424	-0.1506	3.8879	1.90614	5.0036	2.4209
y	21	0.2704	-1.3476	5.9622	11.74177	7.1881	14.2214

The OUTEST= output data set contains all the observations read from the EST= data set, and in addition contains observations for the reduced form and multiplier matrices. The following statements produce a partial listing of the OUTEST= data set, as shown in [Output 25.1.10](#).

```
proc print data=b;
  where _type_ = 'REDUCED' | _type_ = 'IMULT1';
run;
```

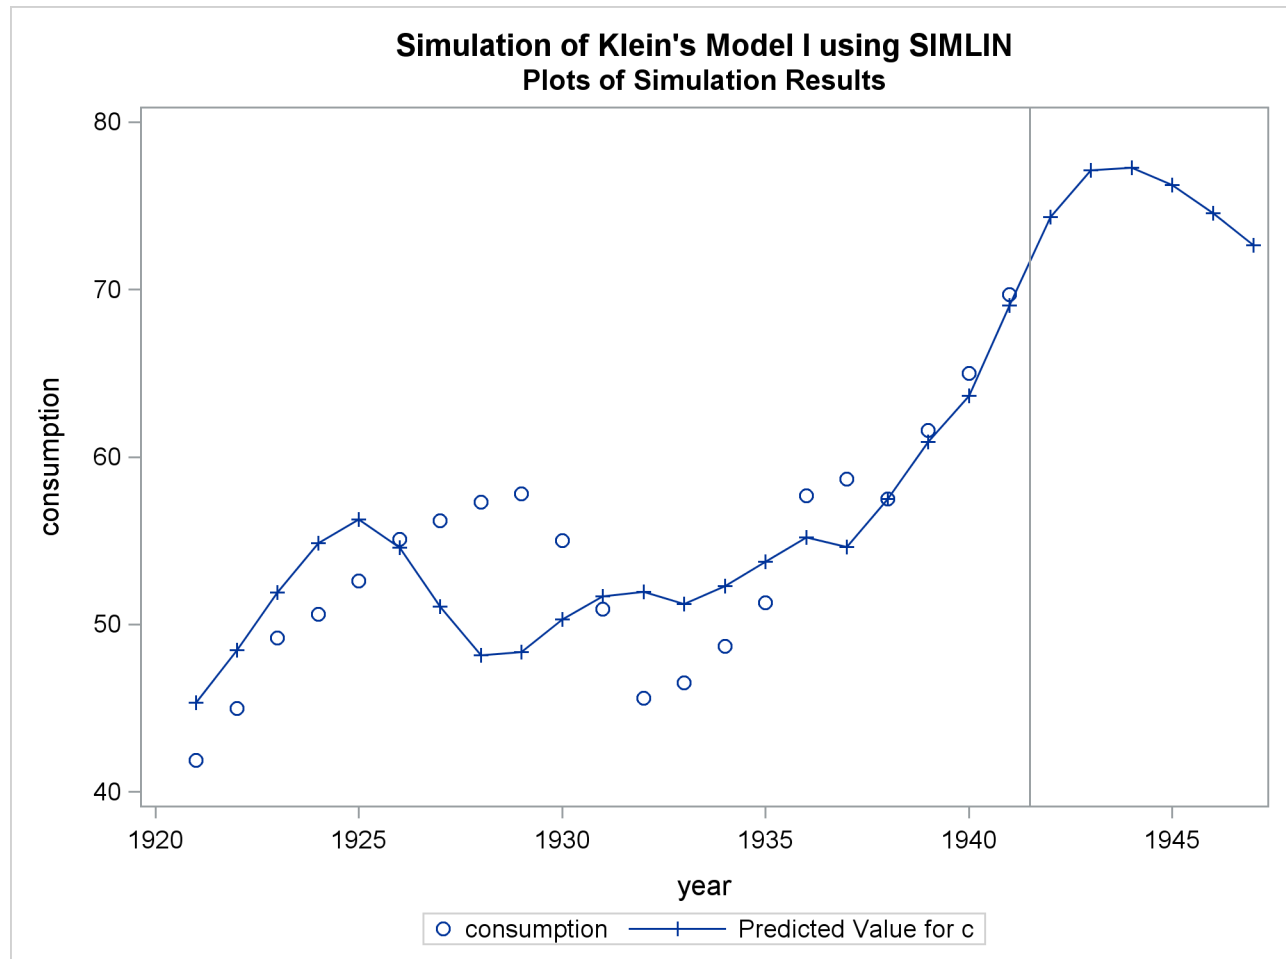
Output 25.1.10 Partial Listing of OUTEST= Data Set

Simulation of Klein's Model I using SIMLIN											

The actual and predicted values for the variable C are plotted in [Output 25.1.11](#).

```
title2 'Plots of Simulation Results';
proc sgplot data=c;
  scatter x=year y=c;
  series x=year y=chat / markers markerattrs=(symbol=plus);
  refline 1941.5 / axis=x;
run;
```

Output 25.1.11 Plot of Actual and Predicted Consumption



Example 25.2: Multipliers for a Third-Order System

This example shows how to fit and simulate a single equation dynamic model with third-order lags. It then shows how to convert the third-order equation into a three equation system with only first-order lags, so that the SIMLIN procedure can compute multipliers. (See the section "Multipliers for Higher Order Lags" earlier in this chapter for more information.)

The input data set TEST is created from simulated data. A partial listing of the data set TEST produced by PROC PRINT is shown in [Output 25.2.1](#).

Output 25.2.1 Partial Listing of Input Data Set

Simulate Equation with Third-Order Lags Listing of Simulated Input Data						
Obs	y	ylag1	ylag2	ylag3	x	n
1	8.2369	8.5191	6.9491	7.8800	-1.2593	1
2	8.6285	8.2369	8.5191	6.9491	-1.6805	2
3	10.2223	8.6285	8.2369	8.5191	-1.9844	3
4	10.1372	10.2223	8.6285	8.2369	-1.7855	4
5	10.0360	10.1372	10.2223	8.6285	-1.8092	5
6	10.3560	10.0360	10.1372	10.2223	-1.3921	6
7	11.4835	10.3560	10.0360	10.1372	-2.0987	7
8	10.8508	11.4835	10.3560	10.0360	-1.8788	8
9	11.2684	10.8508	11.4835	10.3560	-1.7154	9
10	12.6310	11.2684	10.8508	11.4835	-1.8418	10

The REG procedure processes the input data and writes the parameter estimates to the OUTEST= data set A.

```

title2 'Estimated Parameters';
proc reg data=test outest=a;
  model y=ylag3 x;
run;

title2 'Listing of OUTEST= Data Set';
proc print data=a;
run;

```

Output 25.2.2 shows the printed output produced by the REG procedure, and Output 25.2.3 displays the OUTEST= data set A produced.

Output 25.2.2 Estimates and Fit Information from PROC REG

Simulate Equation with Third-Order Lags Estimated Parameters					
The REG Procedure					
Model: MODEL1					
Dependent Variable: y					
Analysis of Variance					
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	2	173.98377	86.99189	1691.98	<.0001
Error	27	1.38818	0.05141		
Corrected Total	29	175.37196			
Root MSE		0.22675	R-Square	0.9921	
Dependent Mean		13.05234	Adj R-Sq	0.9915	
Coeff Var		1.73721			

Output 25.2.2 *continued*

Parameter Estimates					
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t
Intercept	1	0.14239	0.23657	0.60	0.5523
ylag3	1	0.77121	0.01723	44.77	<.0001
x	1	-1.77668	0.10843	-16.39	<.0001

Output 25.2.3 The OUTEST= Data Set Created by PROC REG

Simulate Equation with Third-Order Lags Listing of OUTEST= Data Set								
Obs	_MODEL_	_TYPE_	_DEPVAR_	_RMSE_	Intercept	ylag3	x	y
1	MODEL1	PARMS	y	0.22675	0.14239	0.77121	-1.77668	-1

The SIMLIN procedure processes the TEST data set using the estimates from PROC REG. The following statements perform the simulation and write the results to the OUT= data set OUT2.

```

title2 'Simulation of Equation';
proc simlin est=a data=test nored;
  endogenous y;
  exogenous x;
  lagged ylag3 y 3;
  id n;
  output out=out1 predicted=yhat residual=yresid;
run;

```

The printed output from the SIMLIN procedure is shown in [Output 25.2.4](#).

Output 25.2.4 Output Produced by PROC SIMLIN

Simulate Equation with Third-Order Lags Simulation of Equation The SIMLIN Procedure Fit Statistics								
Variable	N	Mean Error	Mean Pct Error	Mean Abs Error	Mean Abs Pct Error	RMS Error	RMS Pct Error	
y	30	-0.0233	-0.2268	0.2662	2.05684	0.3408	2.6159	

The following statements plot the actual and predicted values, as shown in [Output 25.2.5](#).

```

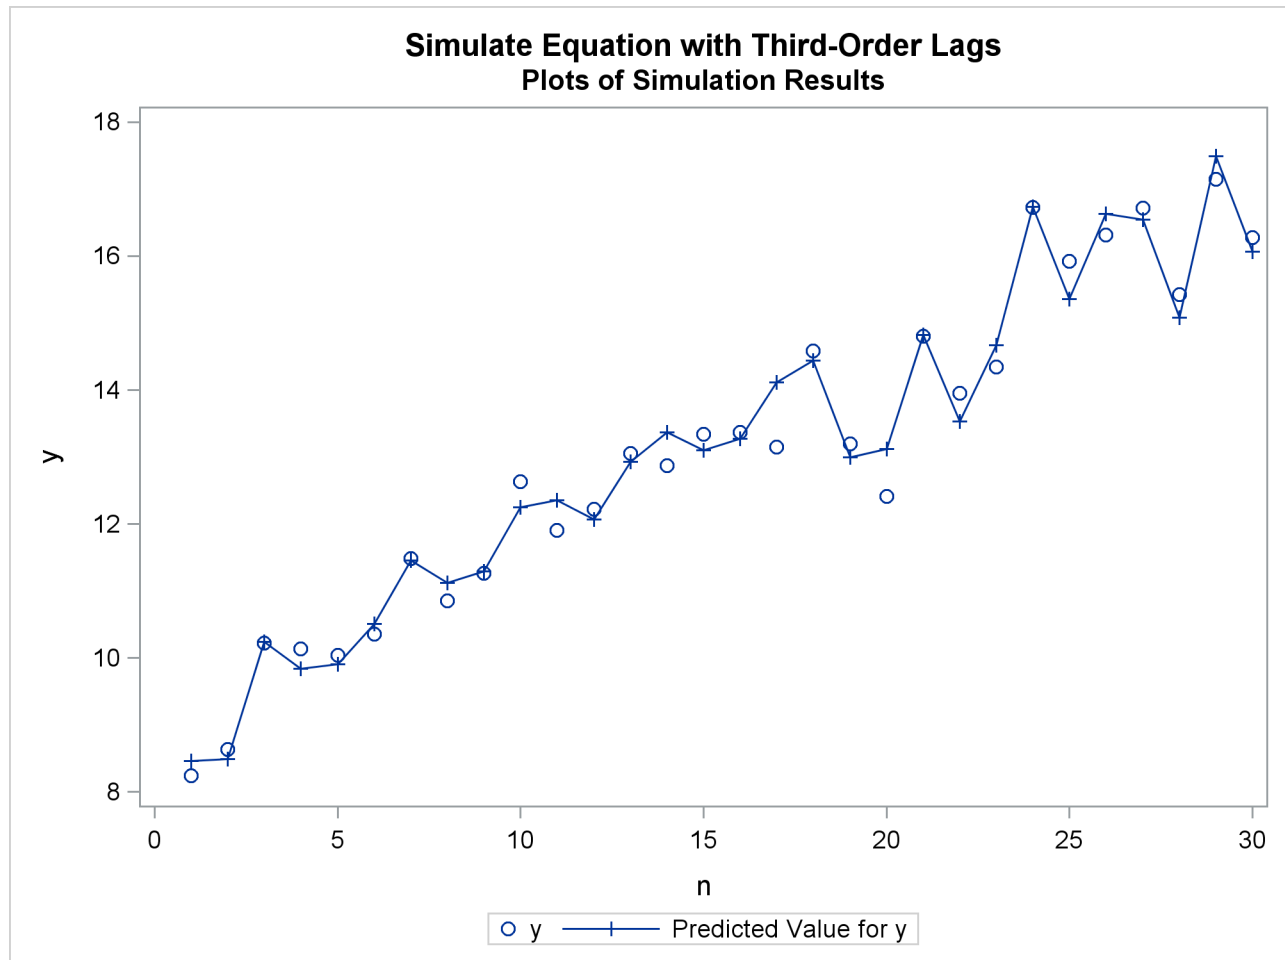
title2 'Plots of Simulation Results';

```



```
proc sgplot data=out1;
  scatter x=n y=y;
  series x=n y=yhat / markers markerattrs=(symbol=plus);
run;
```

Output 25.2.5 Plot of Predicted and Actual Values



Next, the input data set TEST is modified by creating two new variables, YLAG1X and YLAG2X, that are equal to YLAG1 and YLAG2. These variables are used in the SYSLIN procedure. (The estimates produced by PROC SYSLIN are the same as before and are not shown.) A listing of the OUTEST= data set B created by PROC SYSLIN is shown in [Output 25.2.6](#).

```
data test2;
  set test;
  ylag1x=ylag1;
  ylag2x=ylag2;
run;

title2 'Estimation of parameters and definition of identities';
proc syslin data=test2 outest=b;
  endogenous y ylag1x ylag2x;
  model y=ylag3 x;
```

```

identity ylag1x=ylag1;
identity ylag2x=ylag2;
run;

title2 'Listing of OUTEST= data set from PROC SYSLIN';
proc print data=b;
run;

```

Output 25.2.6 Listing of OUTEST= Data Set Created from PROC SYSLIN

Simulate Equation with Third-Order Lags Listing of OUTEST= data set from PROC SYSLIN										
					I					
		—	—	—	n					
		S	M	D	t					
		T	E	S	e					
		A	O	P	r	y		y y	y y	
		T	D	V	c	l		l l	l l	
		U	E	A	M	e	a	a a	a a	
O	P	S	L	R	A	p	g	g g	g g	
b	E	—	—	—	—	t	3	x	1 2	y x x
s	—									
1	OLS	0	Converged	y y	0.22675	0.14239	0.77121	-1.77668	. .	-1 . .
2	IDENTITY	0	Converged	ylag1x	.	0.00000	.	.	1 .	. -1 .
3	IDENTITY	0	Converged	ylag2x	.	0.00000	.	.	. 1	. . -1

The SIMLIN procedure is used to compute the reduced form and multipliers. The OUTEST= data set B from PROC SYSLIN is used as the EST= data set for the SIMLIN procedure. The following statements perform the multiplier analysis.

```

title2 'Simulation of transformed first-order equation system';

proc simlin est=b data=test2 total interim=2;
  endogenous y ylag1x ylag2x;
  exogenous x;
  lagged ylag1 y 1 ylag2 ylag1x 1 ylag3 ylag2x 1;
  id n;
  output out=out2 predicted=yhat residual=yresid;
run;

```

Output 25.2.7 shows the interim 2 and total multipliers printed by the SIMLIN procedure.

Output 25.2.7 Interim 2 and Total Multipliers

Simulate Equation with Third-Order Lags		
Simulation of transformed first-order equation system		
The SIMLIN Procedure		
Interim Multipliers for Interim 2		
Variable	x	Intercept
y	0.000000	0.0000000
ylag1x	0.000000	0.0000000
ylag2x	-1.776682	0.1423865
Total Multipliers		
Variable	x	Intercept
y	-7.765556	0.6223455
ylag1x	-7.765556	0.6223455
ylag2x	-7.765556	0.6223455

References

Maddala, G.S (1977), *Econometrics*, New York: McGraw-Hill Book Co.

Pindyck, R.S. and Rubinfeld, D.L. (1991), *Econometric Models and Economic Forecasts*, Third Edition, New York: McGraw-Hill Book Co.

Theil, H. (1971), *Principles of Econometrics*, New York: John Wiley & Sons, Inc.

Chapter 26

The SPECTRA Procedure

Contents

Overview: SPECTRA Procedure	1739
Getting Started: SPECTRA Procedure	1741
Syntax: SPECTRA Procedure	1742
Functional Summary	1742
PROC SPECTRA Statement	1743
BY Statement	1744
VAR Statement	1745
WEIGHTS Statement	1745
Details: SPECTRA Procedure	1746
Input Data	1746
Missing Values	1746
Computational Method	1746
Kernels	1747
White Noise Test	1749
Transforming Frequencies	1750
OUT= Data Set	1750
Printed Output	1752
ODS Table Names: SPECTRA procedure	1752
Examples: SPECTRA Procedure	1753
Example 26.1: Spectral Analysis of Sunspot Activity	1753
Example 26.2: Cross-Spectral Analysis	1760
References	1763

Overview: SPECTRA Procedure

The SPECTRA procedure performs spectral and cross-spectral analysis of time series. You can use spectral analysis techniques to look for periodicities or cyclical patterns in data.

The SPECTRA procedure produces estimates of the spectral and cross-spectral densities of a multivariate time series. Estimates of the spectral and cross-spectral densities of a multivariate time series are produced

using a finite Fourier transform to obtain periodograms and cross-periodograms. The periodogram ordinates are smoothed by a moving average to produce estimated spectral and cross-spectral densities. PROC SPECTRA can also test whether or not the data are white noise.

PROC SPECTRA uses the finite Fourier transform to decompose data series into a sum of sine and cosine waves of different amplitudes and wavelengths. The finite Fourier transform decomposition of the series x_t is

$$x_t = \frac{a_0}{2} + \sum_{k=1}^{m-1} f_k(a_k \cos \omega_k t + b_k \sin \omega_k t)$$

$$f_k = \begin{cases} 1/2 & \text{if } n \text{ is even and } k = m - 1 \\ 1 & \text{otherwise} \end{cases}$$

where

t	is the time subscript, $t = 0, 1, 2, \dots, n - 1$
x_t	are the equally spaced time series data
n	is the number of observations in the time series
m	is the number of frequencies in the Fourier decomposition: $m = \frac{n+2}{2}$ if n is even, $m = \frac{n+1}{2}$ if n is odd
k	is the frequency subscript, $k = 0, 1, 2, \dots, m - 1$
a_0	is the mean term: $a_0 = 2\bar{x}$
a_k	are the cosine coefficients
b_k	are the sine coefficients
ω_k	are the Fourier frequencies: $\omega_k = \frac{2\pi k}{n}$

Functions of the Fourier coefficients a_k and b_k can be plotted against frequency or against wave length to form *periodograms*. The amplitude periodogram J_k is defined as follows:

$$J_k = \frac{n}{2}(a_k^2 + b_k^2)$$

Several definitions of the term periodogram are used in the spectral analysis literature. The following discussion refers to the J_k sequence as the periodogram.

The periodogram can be interpreted as the contribution of the k th harmonic ω_k to the total sum of squares (in an analysis of variance sense) in the decomposition of the process into two-degree-of-freedom components for each of the m frequencies. When n is even, $\sin(\omega_{\frac{n}{2}})$ is zero, and thus the last periodogram value is a one-degree-of-freedom component.

The periodogram is a volatile and inconsistent estimator of the spectrum. The spectral density estimate is produced by smoothing the periodogram. Smoothing reduces the variance of the estimator but introduces a bias. The weight function used for the smoothing process, $W()$, often called the kernel or spectral window, is specified with the WEIGHTS statement. It is related to another weight function, $w()$, the lag window, that is used in other methods to taper the correlogram rather than to smooth the periodogram. Many specific

weighting functions have been suggested in the literature (Fuller 1976, Jenkins and Watts 1968, Priestly 1981). [Table 26.3](#) later in this chapter gives the relevant formulas when the WEIGHTS statement is used.

Letting i represent the imaginary unit $\sqrt{-1}$, the cross-periodogram is defined as follows:

$$J_k^{xy} = \frac{n}{2}(a_k^x a_k^y + b_k^x b_k^y) + i \frac{n}{2}(a_k^x b_k^y - b_k^x a_k^y)$$

The cross-spectral density estimate is produced by smoothing the cross-periodogram in the same way as the periodograms are smoothed using the spectral window specified by the WEIGHTS statement.

The SPECTRA procedure creates an output SAS data set whose variables contain values of the periodograms, cross-periodograms, estimates of spectral densities, and estimates of cross-spectral densities. The form of the output data set is described in the section “[OUT= Data Set](#)” on page 1750.

Getting Started: SPECTRA Procedure

To use the SPECTRA procedure, specify the input and output data sets and options for the analysis you want in the PROC SPECTRA statement, and list the variables to analyze in the VAR statement. The procedure produces no printed output unless the WHITESTEST option is specified in the PROC SPECTRA statement. The periodogram, spectral density, and other results are written to the OUT= data set, depending on the options used.

For example, to compute the Fourier transform of a variable X in a data set A, use the following statements:

```
proc spectra data=a out=b coef;
  var x;
run;
```

This PROC SPECTRA step writes the Fourier coefficients a_k and b_k to the variables COS_01 and SIN_01 in the output data set B.

When a WEIGHTS statement is specified, the periodogram is smoothed by a weighted moving average to produce an estimate of the spectral density of the series. The following statements write a spectral density estimate for X to the variable S_01 in the output data set B.

```
proc spectra data=a out=b s;
  var x;
  weights 1 2 3 4 3 2 1;
run;
```

When the VAR statement specifies more than one variable, you can perform cross-spectral analysis by specifying the CROSS option in the PROC SPECTRA statement. The CROSS option by itself produces the cross-periodograms for all two-way combinations of the variables listed in the VAR statement. For example, the following statements write the real and imaginary parts of the cross-periodogram of X and Y to the variables RP_01_02 and IP_01_02 in the output data set B.

```
proc spectra data=a out=b cross;
    var x y;
run;
```

To produce cross-spectral density estimates, specify both the CROSS option and the S option. The cross-periodogram is smoothed using the weights specified by the WEIGHTS statement in the same way as the spectral density. The squared coherency and phase estimates of the cross-spectrum are computed when the K and PH options are used.

The following example computes cross-spectral density estimates for the variables X and Y.

```
proc spectra data=a out=b cross s;
    var x y;
    weights 1 2 3 4 3 2 1;
run;
```

The real part and imaginary part of the cross-spectral density estimates are written to the variables CS_01_02 and QS_01_02, respectively.

Syntax: SPECTRA Procedure

The following statements are used with the SPECTRA procedure:

```
PROC SPECTRA options ;
    BY variables ;
    VAR variables ;
    WEIGHTS <weights> <kernel> ;
```

Functional Summary

Table 26.1 summarizes the statements and options that control the SPECTRA procedure.

Table 26.1 SPECTRA Functional Summary

Description	Statement	Option
Statements		
specify BY-group processing	BY	
specify the variables to be analyzed	VAR	
specify weights for spectral density estimates	WEIGHTS	
Data Set Options		
specify the input data set	PROC SPECTRA	DATA=

Table 26.1 *continued*

Description	Statement	Option
specify the output data set	PROC SPECTRA	OUT=
Output Control Options		
output the amplitudes of the cross-spectrum	PROC SPECTRA	A
output the Fourier coefficients	PROC SPECTRA	COEF
output the periodogram	PROC SPECTRA	P
output the spectral density estimates	PROC SPECTRA	S
output cross-spectral analysis results	PROC SPECTRA	CROSS
output squared coherency of the cross-spectrum	PROC SPECTRA	K
output the phase of the cross-spectrum	PROC SPECTRA	PH
Smoothing Options		
specify the Bartlett kernel	WEIGHTS	BART
specify the Parzen kernel	WEIGHTS	PARZEN
specify the quadratic spectral kernel	WEIGHTS	QS
specify the Tukey-Hanning kernel	WEIGHTS	TUKEY
specify the truncated kernel	WEIGHTS	TRUNCAT
Other Options		
subtract the series mean	PROC SPECTRA	ADJMEAN
specify an alternate quadrature spectrum estimate	PROC SPECTRA	ALTW
request tests for white noise	PROC SPECTRA	WHITETEST

PROC SPECTRA Statement

PROC SPECTRA *options* ;

The following options can be used in the PROC SPECTRA statement:

A

outputs the amplitude variables ($A_{nn \ mm}$) of the cross-spectrum.

ADJMEAN

CENTER

subtracts the series mean before performing the Fourier decomposition. This sets the first periodogram ordinate to 0 rather than $2n$ times the squared mean. This option is commonly used when the periodograms are to be plotted to prevent a large first periodogram ordinate from distorting the scale of the plot.

ALTW

specifies that the quadrature spectrum estimate is computed at the boundaries in the same way as the spectral density estimate and the cospectrum estimate are computed.

COEF

outputs the Fourier cosine and sine coefficients of each series.

CROSS

is used with the P and S options to output cross-periodograms and cross-spectral densities when more than one variable is listed in the VAR statement.

DATA=SAS-data-set

names the SAS data set that contains the input data. If the DATA= option is omitted, the most recently created SAS data set is used.

K

outputs the squared coherency variables (K_{nn_mm}) of the cross-spectrum. The K_{nn_mm} variables are identically 1 unless weights are given in the WEIGHTS statement and the S option is specified.

OUT=SAS-data-set

names the output data set created by PROC SPECTRA to store the results. If the OUT= option is omitted, the output data set is named by using the DATA n convention.

P

outputs the periodogram variables. The variables are named P_{nn} , where nn is an index of the original variable with which the periodogram variable is associated. When both the P and CROSS options are specified, the cross-periodogram variables RP_{nn_mm} and IP_{nn_mm} are also output.

PH

outputs the phase variables (PH_{nn_mm}) of the cross-spectrum.

S

outputs the spectral density estimates. The variables are named S_{nn} , where nn is an index of the original variable with which the estimate variable is associated. When both the S and CROSS options are specified, the cross-spectral variables CS_{nn_mm} and QS_{nn_mm} are also output.

WHITETEST

prints two tests of the hypothesis that the data are white noise. See the section “[White Noise Test](#)” on page 1749 for details.

Note that the CROSS, A, K, and PH options are meaningful only if more than one variable is listed in the VAR statement.

BY Statement

BY *variables* ;

A BY statement can be used with PROC SPECTRA to obtain separate analyses for groups of observations defined by the BY variables.

VAR Statement

VAR *variables* ;

The VAR statement specifies one or more numeric variables that contain the time series to analyze. The order of the variables in the VAR statement list determines the index, *nn*, used to name the output variables. The VAR statement is required.

WEIGHTS Statement

WEIGHTS *weight-constants / kernel-specification* ;

The WEIGHTS statement specifies the relative weights used in the moving average applied to the periodogram ordinates to form the spectral density estimates. A WEIGHTS statement must be used to produce smoothed spectral density estimates. You can specify the relative weights in two ways: you can specify them explicitly as explained in the section “[Using Weight Constants Specification](#)” on page 1745, or you can specify them implicitly by using the kernel specification as explained in the section “[Using Kernel Specifications](#)” on page 1745. If the WEIGHTS statement is not used, only the periodogram is produced.

Using Weight Constants Specification

Any number of weighting constants can be specified. The constants should be positive and symmetric about the middle weight. The middle constant (or the constant to the right of the middle if an even number of weight constants are specified) is the relative weight of the current periodogram ordinate. The constant immediately following the middle one is the relative weight of the next periodogram ordinate, and so on. The actual weights used in the smoothing process are the weights specified in the WEIGHTS statement scaled so that they sum to $\frac{1}{4\pi}$.

The moving average reflects at each end of the periodogram. The first periodogram ordinate is not used; the second periodogram ordinate is used in its place.

For example, a simple triangular weighting can be specified using the following WEIGHTS statement:

```
weights 1 2 3 2 1;
```

Using Kernel Specifications

You can specify five different kernels in the WEIGHTS statement. The syntax for the statement is

WEIGHTS [PARZEN][BART][TUKEY][TRUNCAT][QS] [*c e*] ;

where $c \geq 0$ and $e \geq 0$ are used to compute the bandwidth parameter as

$$l(q) = cq^e$$

and q is the number of periodogram ordinates +1:

$$q = \text{floor}(n/2) + 1$$

To specify the bandwidth explicitly, set $c =$ to the desired bandwidth and $e = 0$.

For example, a Parzen kernel can be specified using the following WEIGHTS statement:

```
weights parzen 0.5 0;
```

For details, see the section “[Kernels](#)” on page 1747.

Details: SPECTRA Procedure

Input Data

Observations in the data set analyzed by the SPECTRA procedure should form ordered, equally spaced time series. No more than 99 variables can be included in the analysis.

Data are often detrended before analysis by the SPECTRA procedure. This can be done by using the residuals output by a SAS regression procedure. Optionally, the data can be centered using the ADJMEAN option in the PROC SPECTRA statement, since the zero periodogram ordinate corresponding to the mean is of little interest from the point of view of spectral analysis.

Missing Values

Missing values are excluded from the analysis by the SPECTRA procedure. If the SPECTRA procedure encounters missing values for any variable listed in the VAR statement, the procedure determines the longest contiguous span of data that has no missing values for the variables listed in the VAR statement and uses that span for the analysis.

Computational Method

If the number of observations n factors into prime integers that are less than or equal to 23, and the product of the square-free factors of n is less than 210, then PROC SPECTRA uses the fast Fourier transform developed by Cooley and Tukey and implemented by Singleton (1969). If n cannot be factored in this way, then PROC SPECTRA uses a Chirp-Z algorithm similar to that proposed by Monro and Branch (1976). To reduce memory requirements, when n is small, the Fourier coefficients are computed directly using the defining formulas.

Kernels

Kernels are used to smooth the periodogram by using a weighted moving average of nearby points. A smoothed periodogram is defined by the following equation.

$$\hat{J}_i(l(q)) = \sum_{\tau=-l(q)}^{l(q)} w\left(\frac{\tau}{l(q)}\right) \tilde{J}_{i+\tau}$$

where $w(x)$ is the kernel or weight function. At the endpoints, the moving average is computed cyclically; that is,

$$\tilde{J}_{i+\tau} = \begin{cases} J_{i+\tau} & 0 \leq i + \tau \leq q \\ J_{-(i+\tau)} & i + \tau < 0 \\ J_{q-(i+\tau)} & i + \tau > q \end{cases}$$

The SPECTRA procedure supports the following kernels. They are listed with their default bandwidth functions.

Bartlett: KERNEL BART

$$\begin{aligned} w(x) &= \begin{cases} 1 - |x| & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases} \\ l(q) &= \frac{1}{2}q^{1/3} \end{aligned}$$

Parzen: KERNEL PARZEN

$$\begin{aligned} w(x) &= \begin{cases} 1 - 6|x|^2 + 6|x|^3 & 0 \leq |x| \leq \frac{1}{2} \\ 2(1 - |x|)^3 & \frac{1}{2} \leq |x| \leq 1 \\ 0 & \text{otherwise} \end{cases} \\ l(q) &= q^{1/5} \end{aligned}$$

Quadratic spectral: KERNEL QS

$$\begin{aligned} w(x) &= \frac{25}{12\pi^2 x^2} \left(\frac{\sin(6\pi x/5)}{6\pi x/5} - \cos(6\pi x/5) \right) \\ l(q) &= \frac{1}{2}q^{1/5} \end{aligned}$$

Tukey-Hanning: KERNEL TUKEY

$$w(x) = \begin{cases} (1 + \cos(\pi x))/2 & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

$$l(q) = \frac{2}{3}q^{1/5}$$

Truncated: KERNEL TRUNCAT

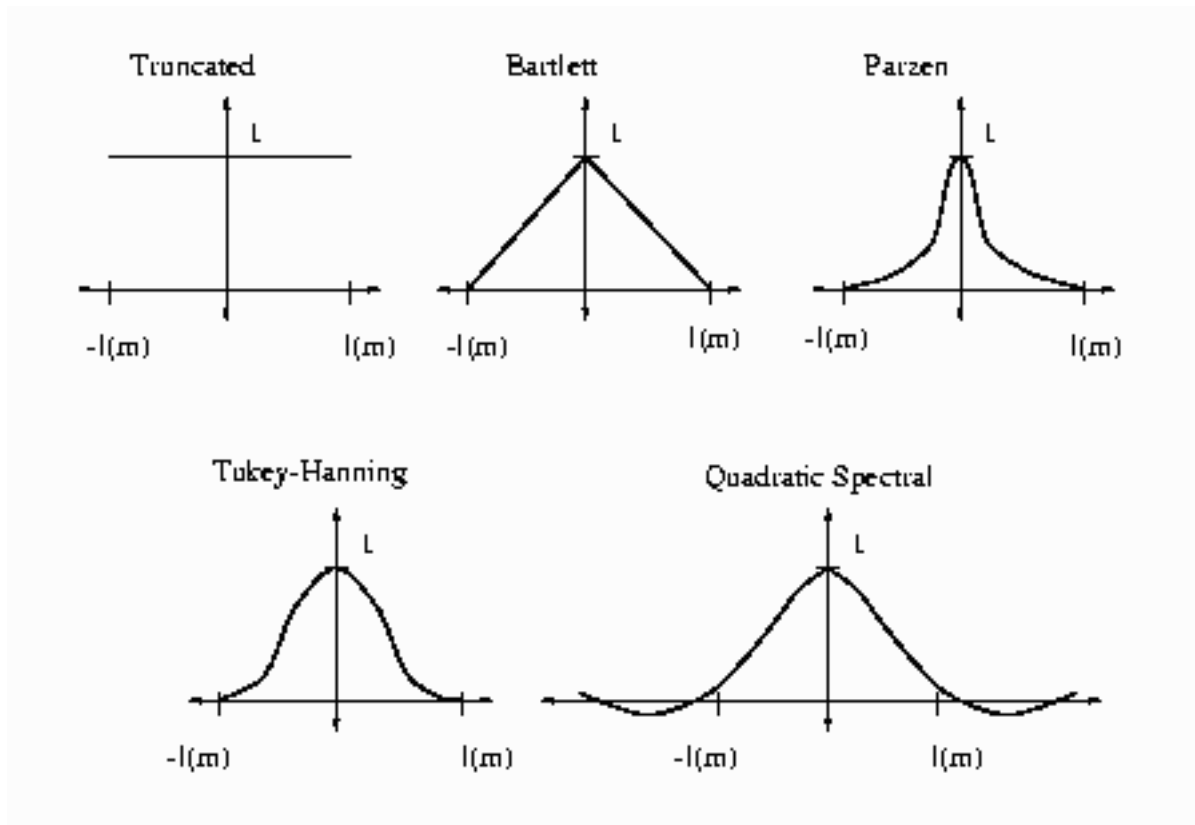
$$w(x) = \begin{cases} 1 & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

$$l(q) = \frac{1}{4}q^{1/5}$$

A summary of the default values of the bandwidth parameters, *c* and *e*, associated with the kernel smoothers in PROC SPECTRA are listed below in [Table 26.2](#):

Table 26.2 Bandwidth Parameters

Kernel	<i>c</i>	<i>e</i>
Bartlett	1/2	1/3
Parzen	1	1/5
quadratic	1/2	1/5
Tukey-Hanning	2/3	1/5
truncated	1/4	1/5

Figure 26.1 Kernels for Smoothing

See Andrews (1991) for details about the properties of these kernels.

White Noise Test

PROC SPECTRA prints two test statistics for white noise when the WHITETEST option is specified: Fisher's Kappa (Davis 1941, Fuller 1976) and Bartlett's Kolmogorov-Smirnov statistic (Bartlett 1966, Fuller 1976, Durbin 1967).

If the time series is a sequence of independent random variables with mean 0 and variance σ^2 , then the periodogram, J_k , will have the same expected value for all k . For a time series with nonzero autocorrelation, each ordinate of the periodogram, J_k , will have different expected values. The Fisher's Kappa statistic tests whether the largest J_k can be considered different from the mean of the J_k . Critical values for the Fisher's Kappa test can be found in Fuller 1976.

The Kolmogorov-Smirnov statistic reported by PROC SPECTRA has the same asymptotic distribution as Bartlett's test (Durbin 1967). The Kolmogorov-Smirnov statistic compares the normalized cumulative periodogram with the cumulative distribution function of a uniform(0,1) random variable. The normalized cumulative periodogram, F_j , of the series is

$$F_j = \frac{\sum_{k=1}^j J_k}{\sum_{k=1}^m J_k}, j = 1, 2, \dots, m-1$$

where $m = \frac{n}{2}$ if n is even or $m = \frac{n-1}{2}$ if n is odd. The test statistic is the maximum absolute difference of the normalized cumulative periodogram and the uniform cumulative distribution function. Approximate p -values for Bartlett's Kolmogorov-Smirnov test statistics are provided with the test statistics. Small p -values cause you to reject the null-hypothesis that the series is white noise.

Transforming Frequencies

The variable FREQ in the data set created by the SPECTRA procedure ranges from 0 to π . Sometimes it is preferable to express frequencies in cycles per observation period, which is equal to $\frac{1}{2\pi}$ FREQ.

To express frequencies in cycles per unit time (for example, in cycles per year), multiply FREQ by $\frac{d}{2\pi}$, where d is the number of observations per unit of time. For example, for monthly data, if the desired time unit is years then d is 12. The period of the cycle is $\frac{2\pi}{d \times \text{FREQ}}$, which ranges from $\frac{2}{d}$ to infinity.

OUT= Data Set

The OUT= data set contains $\frac{n}{2} + 1$ observations, if n is even, or $\frac{n+1}{2}$ observations, if n is odd, where n is the number of observations in the time series or the span of data being analyzed if missing values are present in the data. See the section “Missing Values” on page 1746 for details.

The variables in the new data set are named according to the following conventions. Each variable to be analyzed is associated with an index. The first variable listed in the VAR statement is indexed as 01, the second variable as 02, and so on. Output variables are named by combining indexes with prefixes. The prefix always identifies the nature of the new variable, and the indices identify the original variables from which the statistics were obtained.

Variables that contain spectral analysis results have names that consist of a prefix, an underscore, and the index of the variable analyzed. For example, the variable S_01 contains spectral density estimates for the first variable in the VAR statement. Variables that contain cross-spectral analysis results have names that consist of a prefix, an underscore, the index of the first variable, another underscore, and the index of the second variable. For example, the variable A_01_02 contains the amplitude of the cross-spectral density estimate for the first and second variables in the VAR statement.

Table 26.3 shows the formulas and naming conventions used for the variables in the OUT= data set. Let X be variable number nn in the VAR statement list and let Y be variable number mm in the VAR statement list. Table 26.3 shows the output variables that contain the results of the spectral and cross-spectral analysis of X and Y .

In Table 26.3 the following notation is used. Let W_j be the vector of $2p + 1$ smoothing weights given by the WEIGHTS statement, normalized to sum to $\frac{1}{4\pi}$. Note that the weights are either explicitly provided using the constant specification or are implicitly determined by the kernel specification in the WEIGHTS statement.

The subscript of W_j runs from W_{-p} to W_p , so that W_0 is the middle weight in the list. Let $\omega_k = \frac{2\pi k}{n}$, where $k = 0, 1, \dots, \text{floor}(\frac{n}{2})$.

Table 26.3 Variables Created by PROC SPECTRA

Variable	Description
FREQ	frequency in radians from 0 to π (Note: Cycles per observation is $\frac{\text{FREQ}}{2\pi}$.)
PERIOD	period or wavelength: $\frac{2\pi}{\text{FREQ}}$ (Note: PERIOD is missing for FREQ=0.)
COS_nn	cosine transform of X: $a_k^x = \frac{2}{n} \sum_{t=1}^n X_t \cos(\omega_k(t-1))$
SIN_nn	sine transform of X: $b_k^x = \frac{2}{n} \sum_{t=1}^n X_t \sin(\omega_k(t-1))$
P_nn	periodogram of X: $J_k^x = \frac{n}{2} [(a_k^x)^2 + (b_k^x)^2]$
S_nn	spectral density estimate of X: $F_k^x = \sum_{j=-p}^p W_j J_{k+j}^x$ (except across endpoints)
RP_nn_mm	real part of cross-periodogram X and Y: $\text{real}(J_k^{xy}) = \frac{n}{2} (a_k^x a_k^y + b_k^x b_k^y)$
IP_nn_mm	imaginary part of cross-periodogram of X and Y: $\text{imag}(J_k^{xy}) = \frac{n}{2} (a_k^x b_k^y - b_k^x a_k^y)$
CS_nn_mm	cospectrum estimate (real part of cross-spectrum) of X and Y: $C_k^{xy} = \sum_{j=-p}^p W_j \text{real}(J_{k+j}^{xy})$ (except across endpoints)
QS_nn_mm	quadrature spectrum estimate (imaginary part of cross-spectrum) of X and Y: $Q_k^{xy} = \sum_{j=-p}^p W_j \text{imag}(J_{k+j}^{xy})$ (except across endpoints)
A_nn_mm	amplitude (modulus) of cross-spectrum of X and Y: $A_k^{xy} = \sqrt{(C_k^{xy})^2 + (Q_k^{xy})^2}$
K_nn_mm	coherency squared of X and Y: $K_k^{xy} = (A_k^{xy})^2 / (F_k^x F_k^y)$
PH_nn_mm	phase spectrum in radians of X and Y: $\Phi_k^{xy} = \arctan(Q_k^{xy} / C_k^{xy})$

Printed Output

By default PROC SPECTRA produces no printed output.

When the WHITETEST option is specified, the SPECTRA procedure prints the following statistics for each variable in the VAR statement:

1. the name of the variable
2. $M-1$, the number of two-degree-of-freedom periodogram ordinates used in the test
3. $\text{MAX}(P(*))$, the maximum periodogram ordinate
4. $\text{SUM}(P(*))$, the sum of the periodogram ordinates
5. Fisher's Kappa statistic
6. Bartlett's Kolmogorov-Smirnov test statistic
7. Approximate p -value for Bartlett's Kolmogorov-Smirnov test statistic

See the section “[White Noise Test](#)” on page 1749 for details.

ODS Table Names: SPECTRA procedure

PROC SPECTRA assigns a name to each table it creates. You can use these names to reference the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 26.4 ODS Tables Produced in PROC SPECTRA

ODS Table Name	Description	Option
WhiteNoiseTest	white noise test	WHITETEST
Kappa	Fishers Kappa statistic	WHITETEST
Bartlett	Bartletts Kolmogorov-Smirnov statistic	WHITETEST

Examples: SPECTRA Procedure

Example 26.1: Spectral Analysis of Sunspot Activity

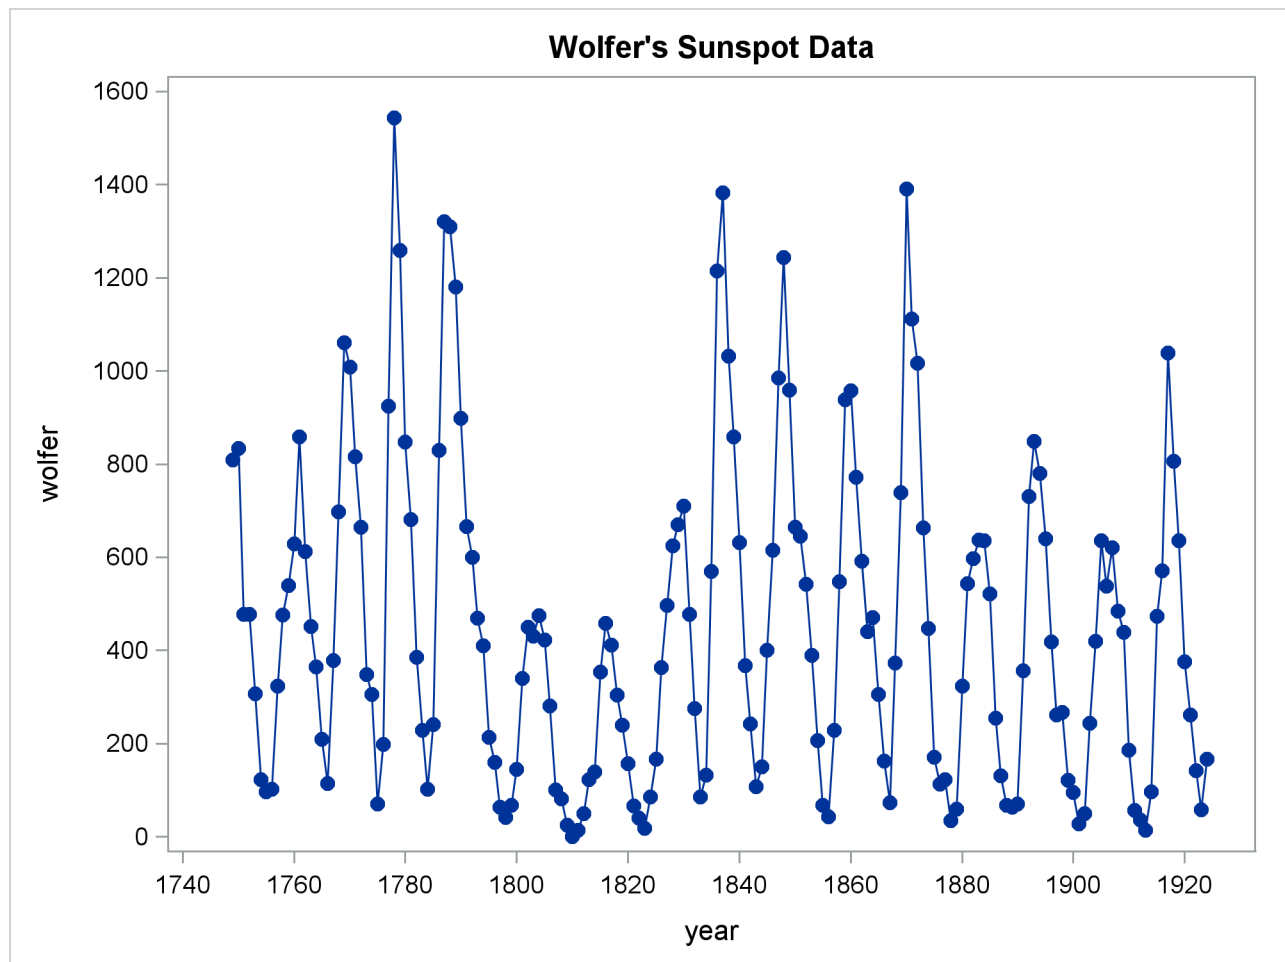
This example analyzes Wolfer's sunspot data (Anderson 1971). The following statements read and plot the data.

```
title "Wolfer's Sunspot Data";
data sunspot;
    input year wolfer @@;
datalines;

    ... more lines ...

proc sgplot data=sunspot;
    series x=year y=wolfer / markers markerattrs=(symbol=circlefilled);
    xaxis values=(1740 to 1930 by 10);
    yaxis values=(0 to 1600 by 200);
run;
```

The plot of the sunspot series is shown in [Output 26.1.1](#).

Output 26.1.1 Plot of Original Sunspot Data

The spectral analysis of the sunspot series is performed by the following statements:

```
proc spectra data=sunspot out=b p s adjmean whitetest;
  var wolfer;
  weights 1 2 3 4 3 2 1;
run;

proc print data=b(obs=12);
run;
```

The PROC SPECTRA statement specifies the P and S options to write the periodogram and spectral density estimates to the OUT= data set B. The WEIGHTS statement specifies a triangular spectral window for smoothing the periodogram to produce the spectral density estimate. The ADJMEAN option zeros the frequency 0 value and avoids the need to exclude that observation from the plots. The WHITETEST option prints tests for white noise.

The Fisher's Kappa test statistic of 16.070 is larger than the 5% critical value of 7.2, so the null hypothesis that the sunspot series is white noise is rejected (see the table of critical values in Fuller (1976)).

The Bartlett's Kolmogorov-Smirnov statistic is 0.6501, and its approximate p -value is < 0.0001 . The small p -value associated with this test leads to the rejection of the null hypothesis that the spectrum represents white noise.

The printed output produced by PROC SPECTRA is shown in [Output 26.1.2](#). The output data set B created by PROC SPECTRA is shown in part in [Output 26.1.3](#).

Output 26.1.2 White Noise Test Results

Wolfer's Sunspot Data	
The SPECTRA Procedure	
Test for White Noise for Variable wolfer	
M-1	87
Max(P(*))	4062267
Sum(P(*))	21156512
Fisher's Kappa: $(M-1) * \text{Max}(P(*)) / \text{Sum}(P(*))$	
Kappa	16.70489
Bartlett's Kolmogorov-Smirnov Statistic:	
Maximum absolute difference of the standardized	
partial sums of the periodogram and the CDF of a	
uniform(0,1) random variable.	
Test Statistic	0.650055
Approximate P-Value	<.0001

Output 26.1.3 First 12 Observations of the OUT= Data Set

Wolfer's Sunspot Data				
Obs	FREQ	PERIOD	P_01	S_01
1	0.00000	.	0.00	59327.52
2	0.03570	176.000	3178.15	61757.98
3	0.07140	88.000	2435433.22	69528.68
4	0.10710	58.667	1077495.76	66087.57
5	0.14280	44.000	491850.36	53352.02
6	0.17850	35.200	2581.12	36678.14
7	0.21420	29.333	181163.15	20604.52
8	0.24990	25.143	283057.60	15132.81
9	0.28560	22.000	188672.97	13265.89
10	0.32130	19.556	122673.94	14953.32
11	0.35700	17.600	58532.93	16402.84
12	0.39270	16.000	213405.16	18562.13

The following statements plot the periodogram and spectral density estimate by the frequency and period.

```
proc sgplot data=b;
  series x=freq y=p_01 / markers markerattrs=(symbol=circlefilled);
run;

proc sgplot data=b;
```

```

series x=period y=p_01 / markers markerattrs=(symbol=circlefilled);
run;

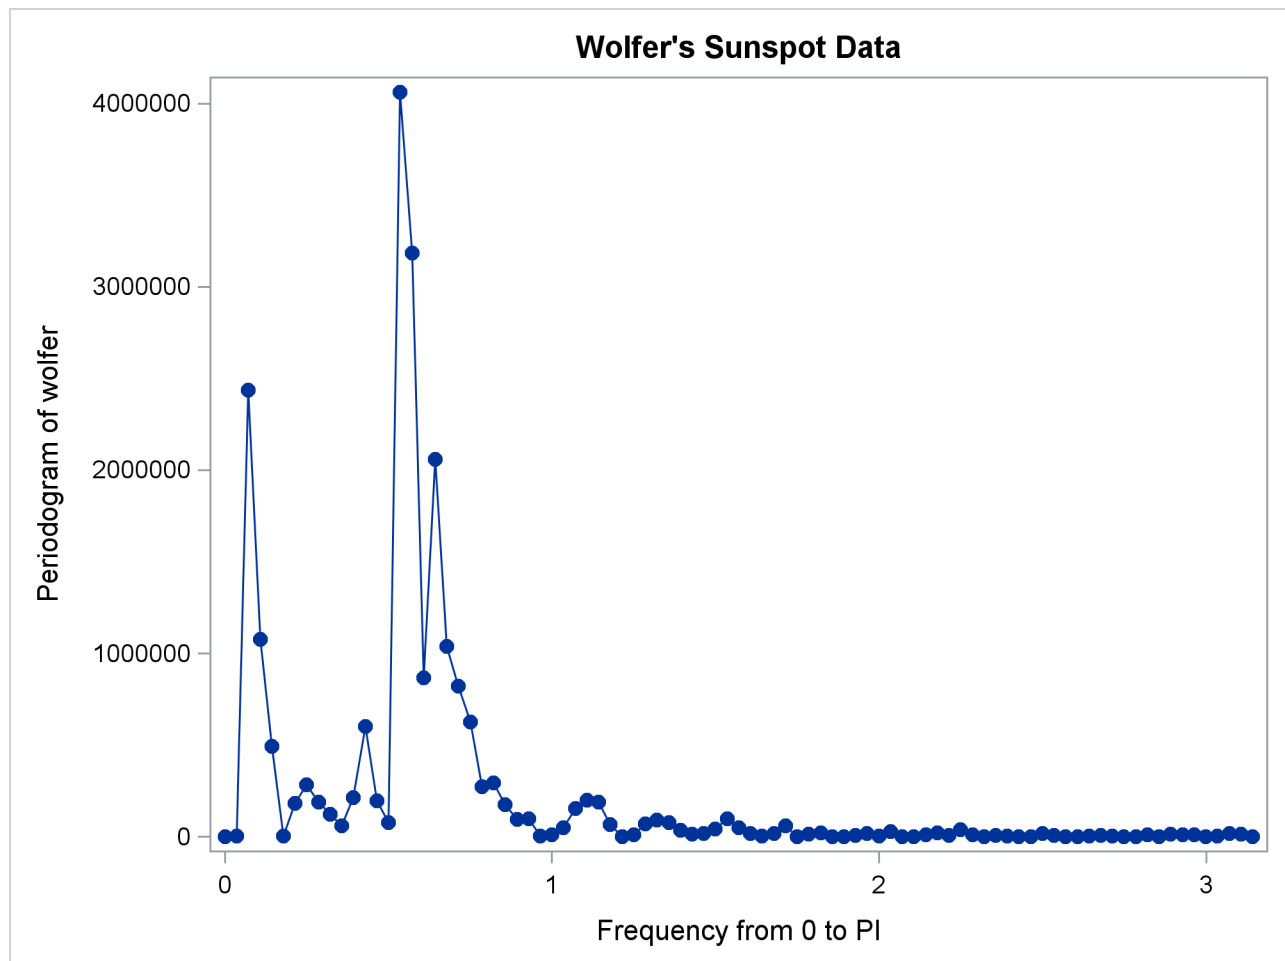
proc sgplot data=b;
series x=freq y=s_01 / markers markerattrs=(symbol=circlefilled);
run;

proc sgplot data=b;
series x=period y=s_01 / markers markerattrs=(symbol=circlefilled);
run;

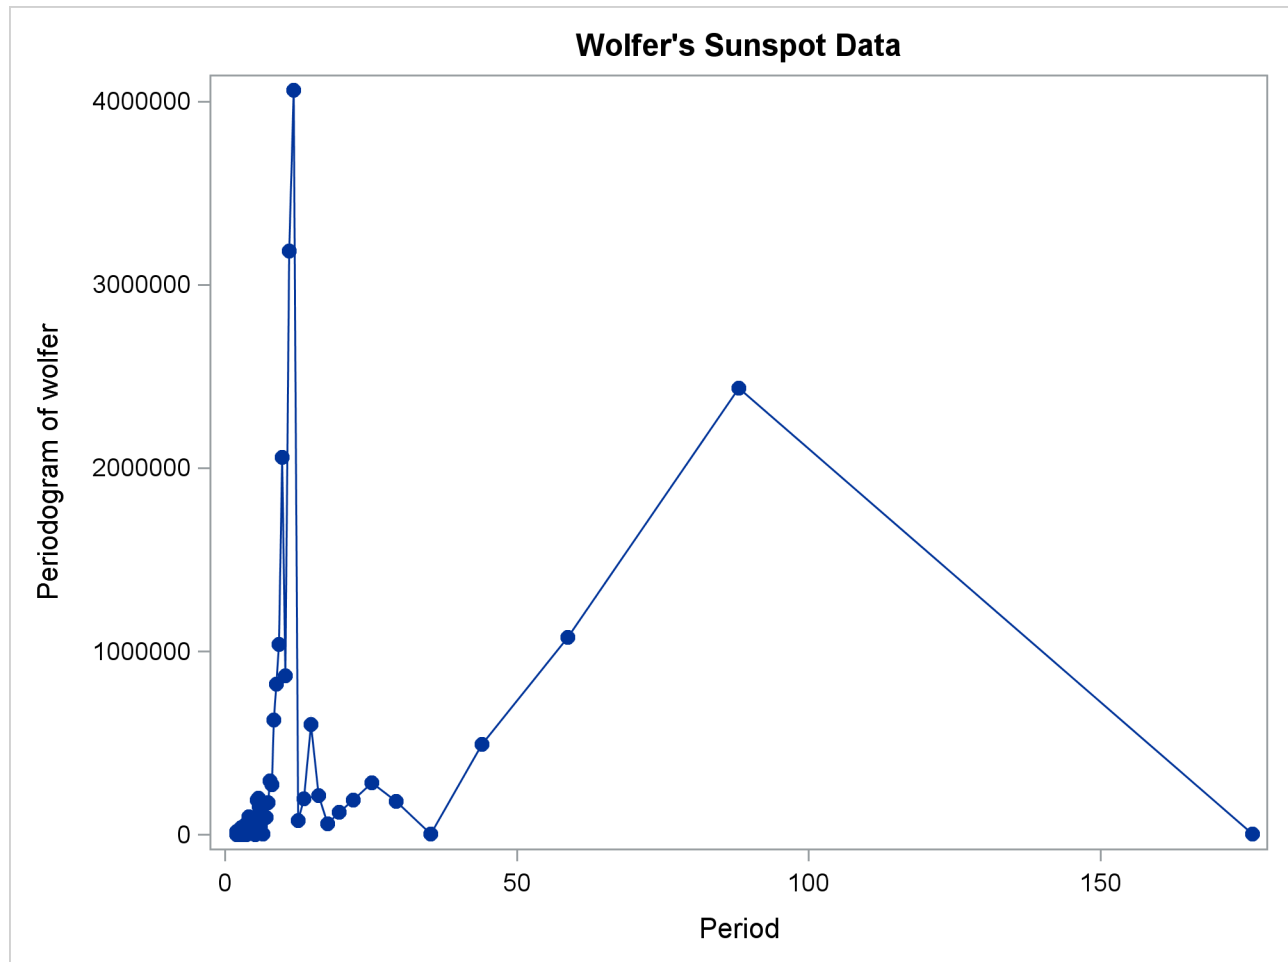
```

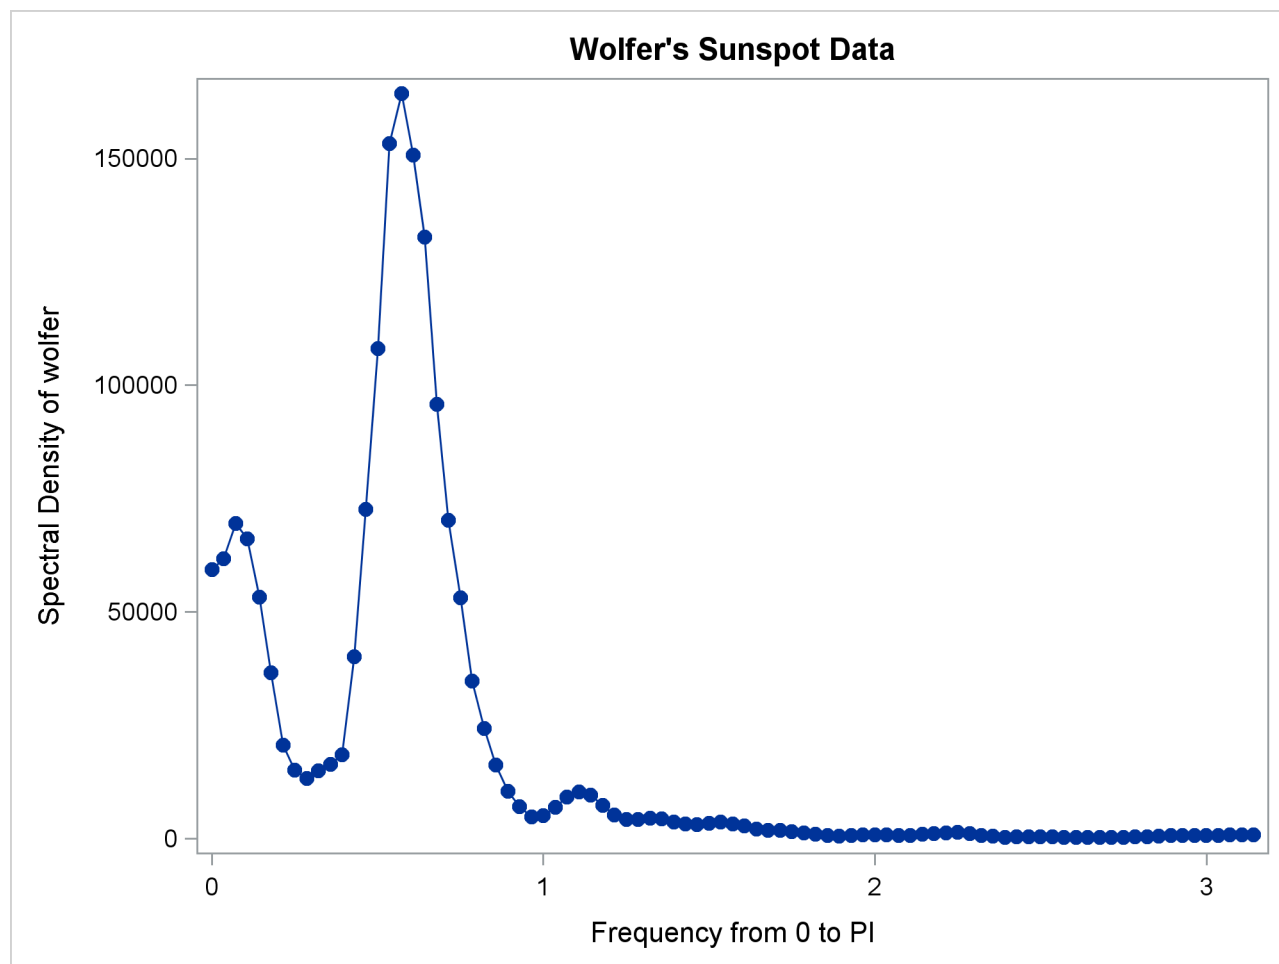
The periodogram is plotted against the frequency in [Output 26.1.4](#) and plotted against the period in [Output 26.1.5](#). The spectral density estimate is plotted against the frequency in [Output 26.1.6](#) and plotted against the period in [Output 26.1.7](#).

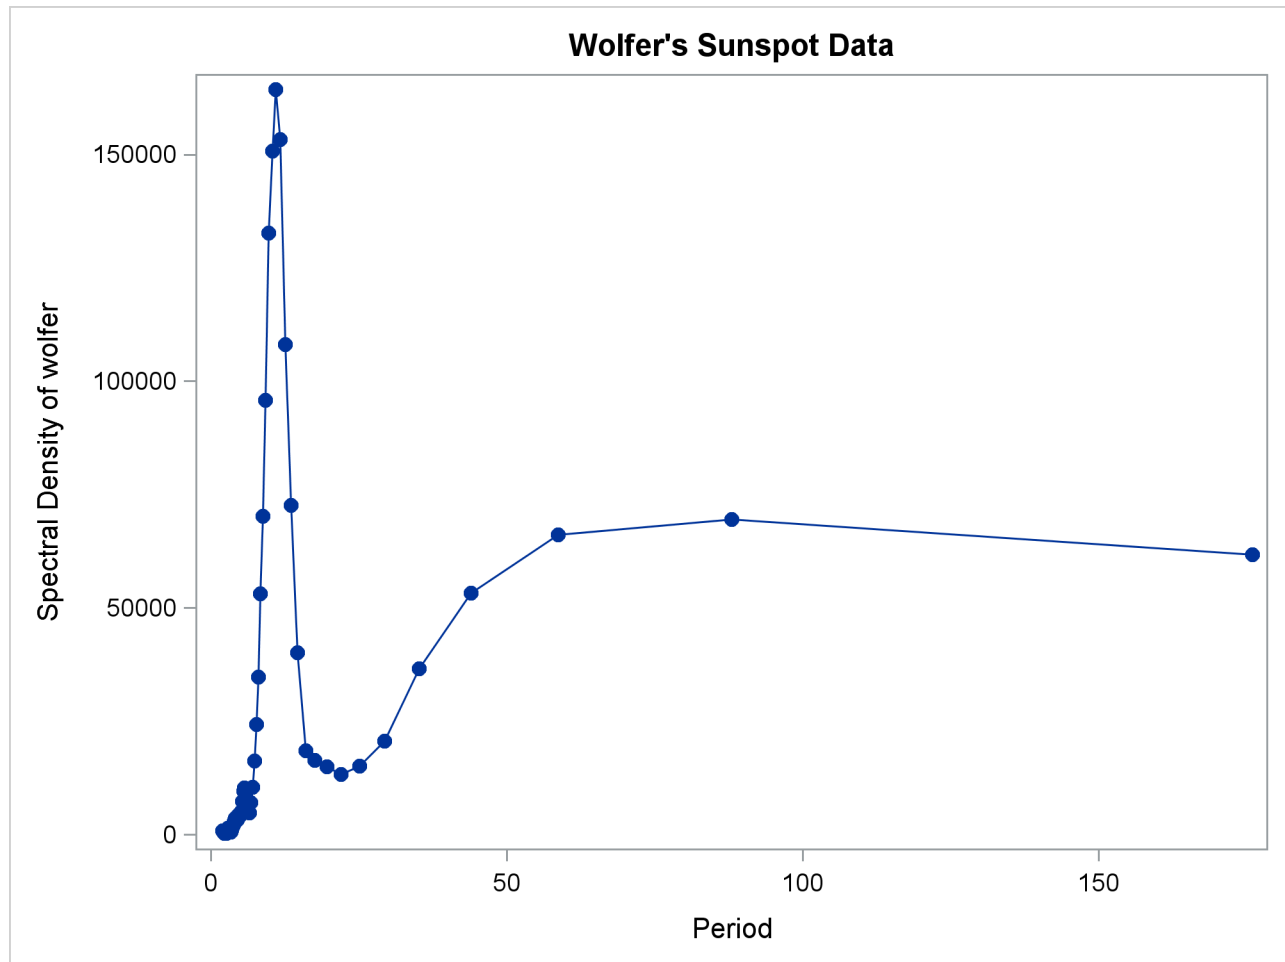
Output 26.1.4 Plot of Periodogram by Frequency



Output 26.1.5 Plot of Periodogram by Period



Output 26.1.6 Plot of Spectral Density Estimate by Frequency

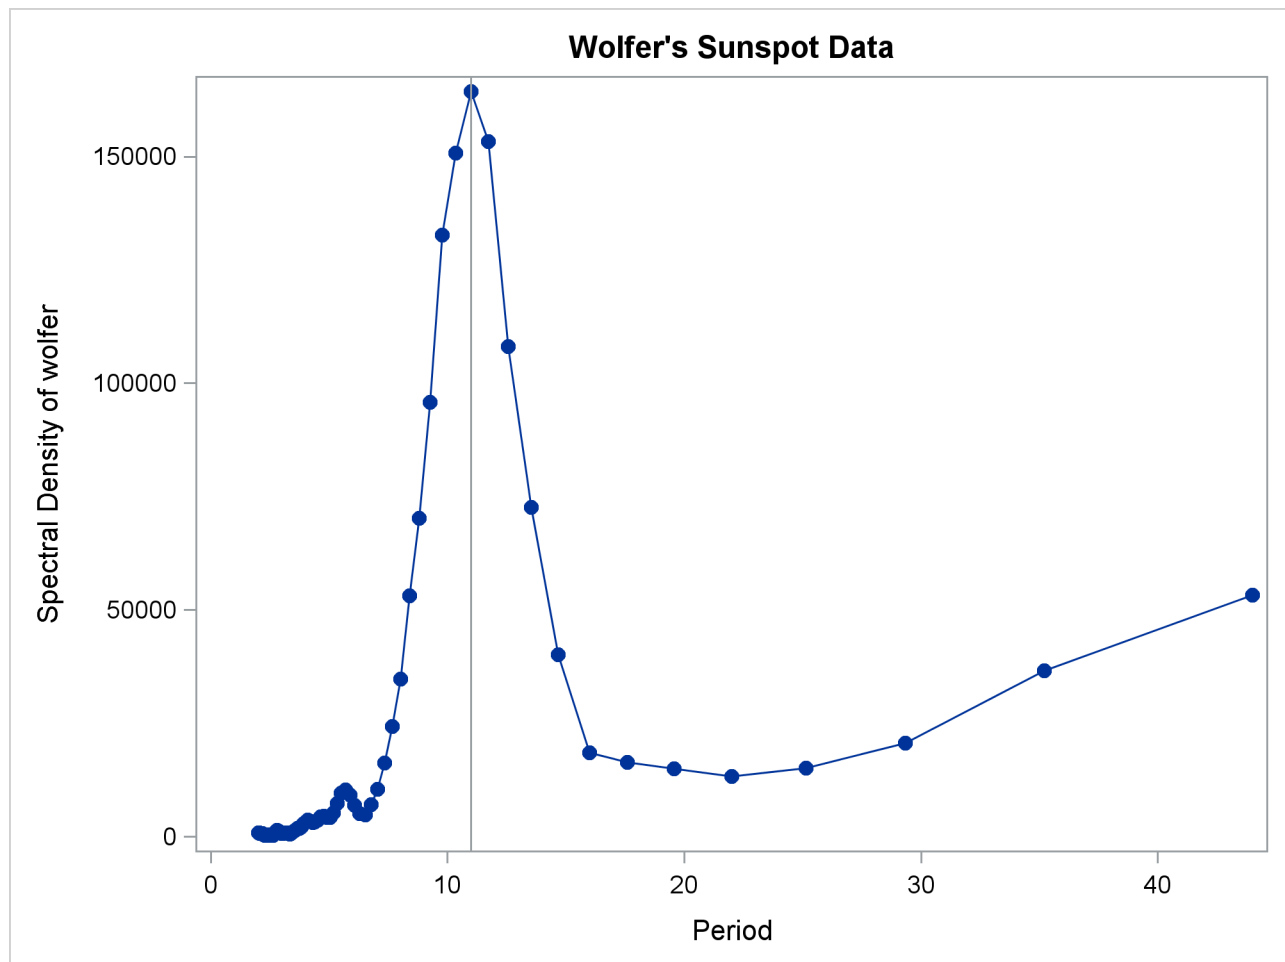
Output 26.1.7 Plot of Spectral Density Estimate by Period

Since PERIOD is the reciprocal of frequency, the plot axis for PERIOD is stretched for low frequencies and compressed at high frequencies. One way to correct for this is to use a WHERE statement to restrict the plots and exclude the low frequency components. The following statements plot the spectral density for periods less than 50.

```
proc sgplot data=b;
  where period < 50;
  series x=period y=s_01 / markers markerattrs=(symbol=circlefilled);
  refline 11 / axis=x;
run;
title;
```

The spectral analysis of the sunspot series confirms a strong 11-year cycle of sunspot activity. The plot makes this clear by drawing a reference line at the 11 year period, which highlights the position of the main peak in the spectral density.

Output 26.1.8 shows the plot. Contrast Output 26.1.8 with Output 26.1.7.

Output 26.1.8 Plot of Spectral Density Estimate by Period to 50 Years

Example 26.2: Cross-Spectral Analysis

This example uses simulated data to show cross-spectral analysis for two variables X and Y . X is generated by an AR(1) process; Y is generated as white noise plus an input from X lagged 2 periods. All output options are specified in the PROC SPECTRA statement. PROC CONTENTS shows the contents of the OUT= data set.

```
data a;
  x1 = 0; x11 = 0;
  do i = - 10 to 100;
    x = .4 * x1 + rannor(123);
    y = .5 * x11 + rannor(123);
    if i > 0 then output;
    x11 = x1; x1 = x;
  end;
run;

proc spectra data=a out=b cross coef a k p ph s;
```

```

var x y;
weights 1 1.5 2 4 8 9 8 4 2 1.5 1;
run;

proc contents data=b position;
run;

```

The PROC CONTENTS report for the output data set B is shown in [Output 26.2.1](#).

Output 26.2.1 Contents of PROC SPECTRA OUT= Data Set

The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Label
16	A_01_02	Num	8	Amplitude of x by y
3	COS_01	Num	8	Cosine Transform of x
5	COS_02	Num	8	Cosine Transform of y
13	CS_01_02	Num	8	Cospectra of x by y
1	FREQ	Num	8	Frequency from 0 to PI
12	IP_01_02	Num	8	Imag Periodogram of x by y
15	K_01_02	Num	8	Coherency**2 of x by y
2	PERIOD	Num	8	Period
17	PH_01_02	Num	8	Phase of x by y
7	P_01	Num	8	Periodogram of x
8	P_02	Num	8	Periodogram of y
14	QS_01_02	Num	8	Quadrature of x by y
11	RP_01_02	Num	8	Real Periodogram of x by y
4	SIN_01	Num	8	Sine Transform of x
6	SIN_02	Num	8	Sine Transform of y
9	S_01	Num	8	Spectral Density of x
10	S_02	Num	8	Spectral Density of y

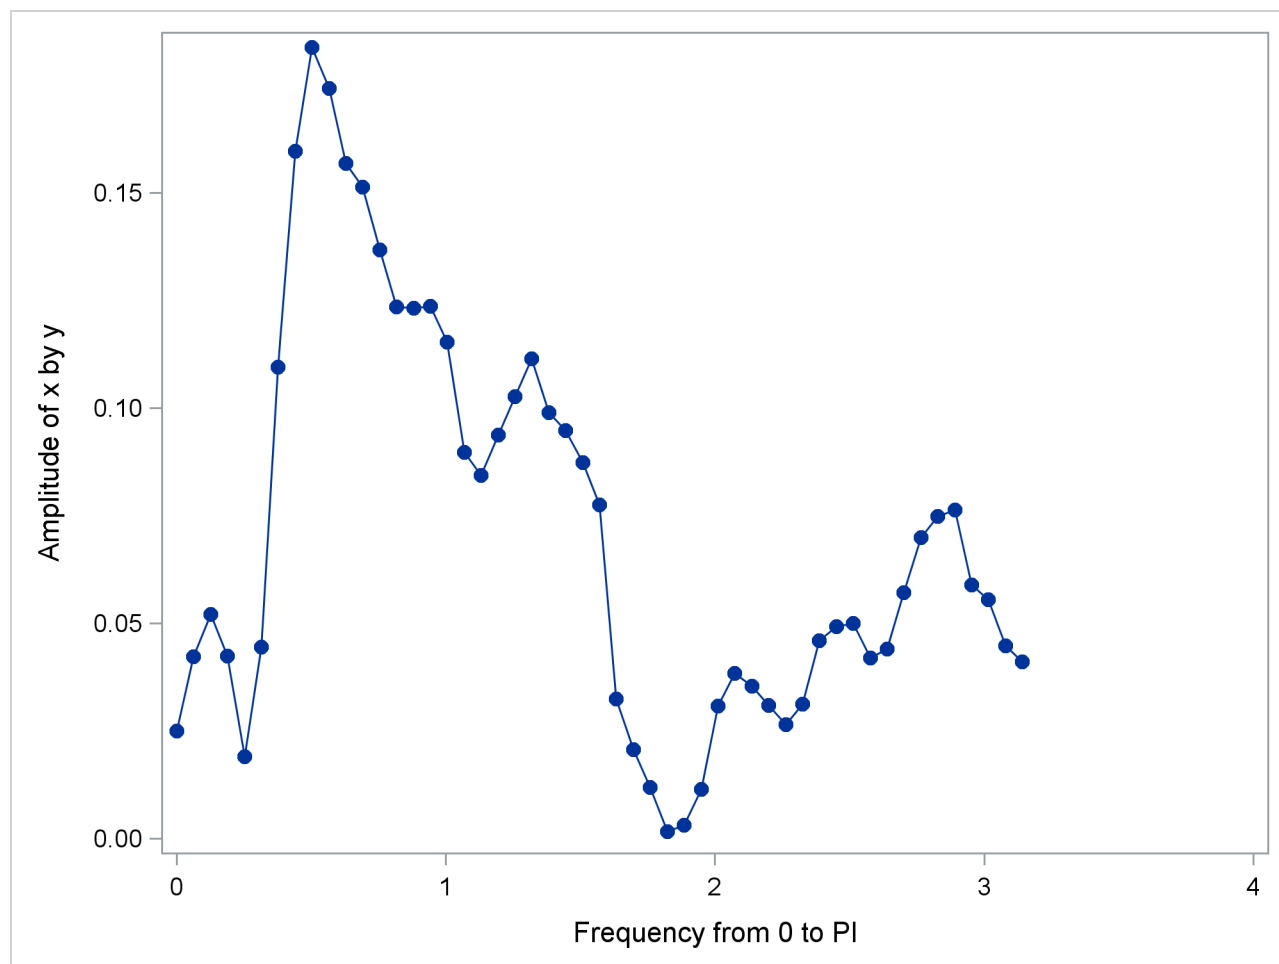
The following statements plot the amplitude of the cross-spectrum estimate against frequency and against period for periods less than 25.

```

proc sgplot data=b;
  series x=freq y=a_01_02 / markers markerattrs=(symbol=circlefilled);
  xaxis values=(0 to 4 by 1);
run;

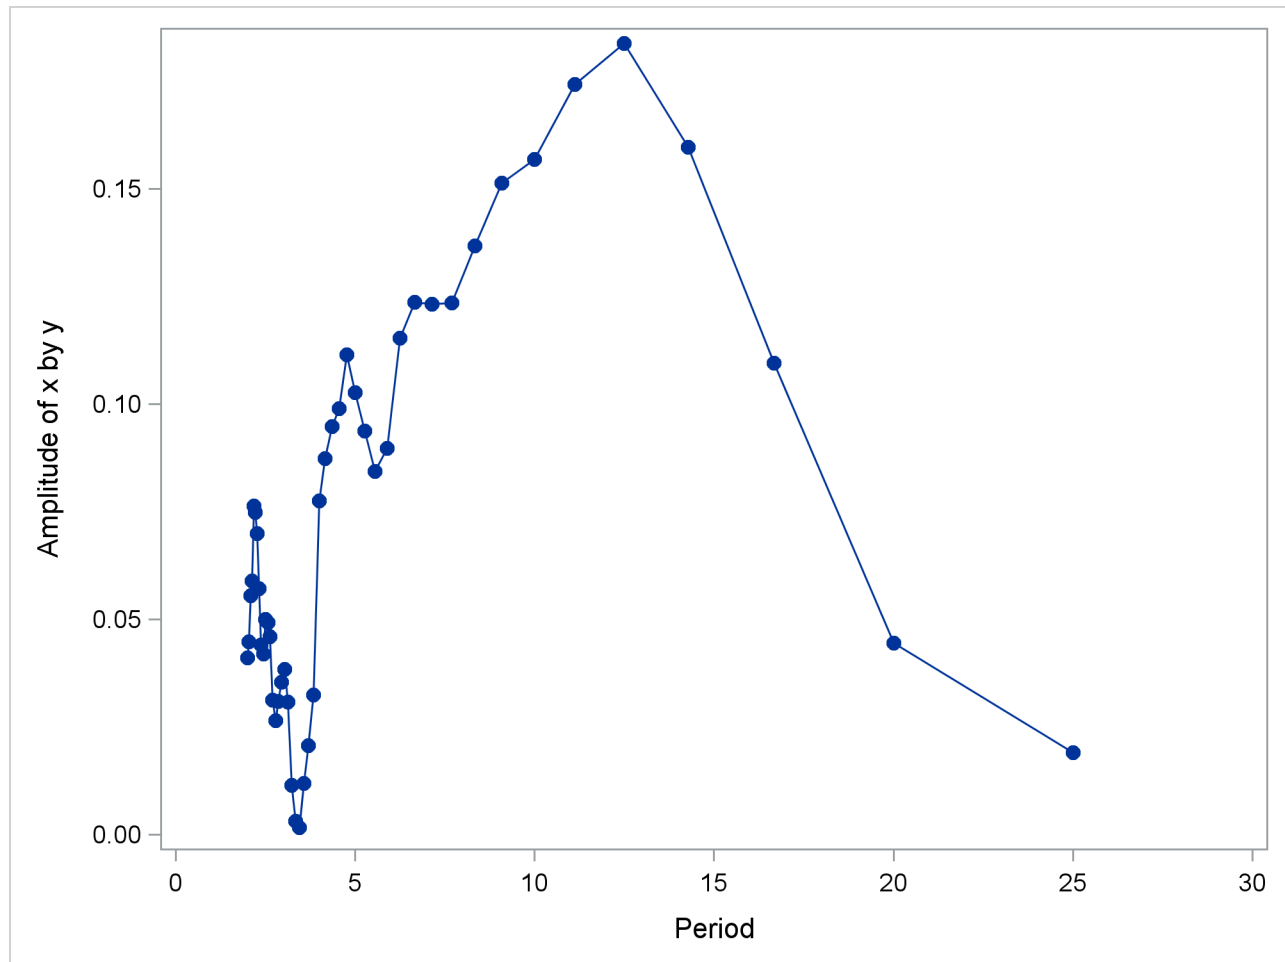
```

The plot of the amplitude of the cross-spectrum estimate against frequency is shown in [Output 26.2.2](#).

Output 26.2.2 Plot of Cross-Spectrum Amplitude by Frequency

The plot of the cross-spectrum amplitude against period for periods less than 25 observations is shown in [Output 26.2.3](#).

```
proc sgplot data=b;
  where period < 25;
  series x=period y=a_01_02 / markers markerattrs=(symbol=circlefilled);
  xaxis values=(0 to 30 by 5);
run;
```

Output 26.2.3 Plot of Cross-Spectrum Amplitude by Period

References

- Anderson, T. W. (1971), *The Statistical Analysis of Time Series*, New York: John Wiley & Sons.
- Andrews, D. W. K. (1991), "Heteroscedasticity and Autocorrelation Consistent Covariance Matrix Estimation," *Econometrica*, 59 (3), 817–858.
- Bartlett, M. S. (1966), *An Introduction to Stochastic Processes*, Second Edition, Cambridge: Cambridge University Press.
- Brillinger, D. R. (1975), *Time Series: Data Analysis and Theory*, New York: Holt, Rinehart and Winston, Inc.
- Davis, H. T. (1941), *The Analysis of Economic Time Series*, Bloomington, IN: Principia Press.
- Durbin, J. (1967), "Tests of Serial Independence Based on the Cumulated Periodogram," *Bulletin of Int. Stat. Inst.*, 42, 1039–1049.

- Fuller, W. A. (1976), *Introduction to Statistical Time Series*, New York: John Wiley & Sons.
- Gentleman, W. M. and Sande, G. (1966), “Fast Fourier Transforms—for Fun and Profit,” *AFIPS Proceedings of the Fall Joint Computer Conference*, 19, 563–578.
- Jenkins, G. M. and Watts, D. G. (1968), *Spectral Analysis and Its Applications*, San Francisco: Holden-Day.
- Miller, L. H. (1956), “Tables of Percentage Points of Kolmogorov Statistics,” *Journal of American Statistical Association*, 51, 111.
- Monro, D. M. and Branch, J. L. (1976), “Algorithm AS 117. The Chirp Discrete Fourier Transform of General Length,” *Applied Statistics*, 26, 351–361.
- Nussbaumer, H. J. (1982), *Fast Fourier Transform and Convolution Algorithms*, Second Edition, New York: Springer-Verlag.
- Owen, D. B. (1962), *Handbook of Statistical Tables*, Addison Wesley.
- Parzen, E. (1957), “On Consistent Estimates of the Spectrum of a Stationary Time Series,” *Annals of Mathematical Statistics*, 28, 329–348.
- Priestly, M. B. (1981), *Spectral Analysis and Time Series*, New York: Academic Press, Inc.
- Singleton, R. C. (1969), “An Algorithm for Computing the Mixed Radix Fast Fourier Transform,” *I.E.E.E. Transactions of Audio and Electroacoustics*, AU-17, 93–103.

Chapter 27

The SSM Procedure (Experimental)

Contents

Overview: SSM Procedure	1766
Background	1767
Getting Started: SSM Procedure	1767
Syntax: SSM Procedure	1775
Functional Summary	1776
PROC SSM Statement	1777
BY Statement	1777
COMPONENT Statement	1777
EVAL Statement	1778
FORECAST Statement	1778
ID Statement	1779
IRREGULAR Statement	1779
MODEL Statement	1779
PARMS Statement	1780
Programming Statements	1780
STATE Statement	1781
TREND Statement	1784
Details	1786
The State Space Model and Notation	1786
Types of Data Organization	1788
Overview of Model Specification Syntax	1789
Likelihood, Filtering, and Smoothing	1792
Contrasting PROC SSM with Other SAS Procedures	1796
Predefined Trend Models	1797
Predefined Structural Models	1799
Covariance Parameterization	1804
Missing Values	1804
Computational Issues	1805
Displayed Output	1806
ODS Table Names	1807
OUT= Data Set	1808
Examples: SSM Procedure	1809
Example 27.1: Panel Data: Two-Way Random-Effects Model	1809
Example 27.2: Backcasting, Forecasting, and Interpolation	1814

Example 27.3: Smoothing of Repeated Measures Data	1816
Example 27.4: A User-Defined Trend Model	1822
References	1826

Overview: SSM Procedure

(Linear) state space models (SSMs) are often used for analyzing continuous response variables that are recorded sequentially according to a numeric indexing variable. In many cases the indexing variable is time, and the observations are collected at regular time intervals—for example, hourly, weekly, or monthly. In such cases the resulting data are called time series data. In other cases the indexing variable might not be time, or the observations might not be equally spaced according to the indexing variable. These more general types of sequential data are called longitudinal data. Because of their sequential nature, these types of data exhibit some characteristic features. For example, chronologically closer measurements tend to be highly correlated while measurements farther apart are essentially uncorrelated, and data can be trending in a particular direction and can have seasonal or other periodic patterns. SSMs are specially designed to model such sequential data. They are applicable in both univariate and multivariate response situations and can easily incorporate predictor (independent variable) information when it is available.

The SSM procedure performs state space modeling of univariate and multivariate time series and longitudinal data. You can do the following with the SSM procedure:

- analyze a very general linear state space model
- use an expressive language to specify an SSM. An SSM specification consists of specifying a variety of matrices—for example, the state transition matrix and the covariance matrices of the state and observation disturbances. The SSM procedure provides language similar to a DATA step for specifying the elements of these matrices. The matrix elements can be user-defined functions of data variables and unknown parameters.
- easily specify several commonly needed univariate and multivariate SSMs by using only a few keywords. These include the principal univariate and multivariate structural models for regularly spaced data, and a variety of trend and cycle models for the longitudinal data.
- estimate unknown model parameters by (restricted) maximum likelihood. The likelihood function is computed by using the (diffuse) Kalman filter algorithm.
- output to a data set the series forecasts, residuals, and the full sample estimates of any linear combination of the underlying state variables. These estimates are obtained by using the (diffuse) Kalman filter and smoother algorithm.

Background

State space models are widely used in a variety of fields such as engineering, statistics, econometrics, and agriculture. There are numerous references that deal with state space modeling, particularly with the state space modeling of time series data. State space modeling of longitudinal data has received a little less attention. The primary reference for the modeling techniques implemented in the SSM procedure is Harvey (1989). It contains treatment of both the time series and longitudinal data. Other useful books about this subject are Durbin and Koopman (2001), Jones (1993), and Anderson and Moore (1979). Jones (1993) is exclusively devoted to the state space modeling of longitudinal data. In addition, the articles Wecker and Ansley (1983), Kohn and Ansley (1991), and de Jong and Mazzi (2001) are also quite informative. For the implementation details of the diffuse Kalman filter and smoother (the main computational tool used by the SSM procedure), the main references are a series of articles de Jong (1989, 1991), de Jong and Chu-Chun-Lin (2003), and the references therein.

Getting Started: SSM Procedure

This example illustrates how you can use the SSM procedure to analyze a bivariate time series. The following data set contains two variables, `f_KSI` and `r_KSI`, which are measured quarterly, starting on the first quarter of 1969. `f_KSI` represents the quarterly average of the log of the monthly totals of the front-seat passengers killed or seriously injured during the car accidents, and `r_KSI` represents a similar number for the rear-seat passengers. The data set has been extended at the end with eight missing values, which represent four quarters, to cause the SSM procedure to produce model forecasts for this span.

```
data seatBelt;
input f_KSI r_KSI @@;
label f_KSI = "Front Seat Passengers Injured--log scale";
label r_KSI = "Rear Seat Passengers Injured--log scale";
date = intnx('quarter', '1jan1969'd, _n_-1 );
format date YYQ5.;
datalines;
6.72417 5.64654 6.81728 6.06123 6.92382 6.18190
6.92375 6.07763 6.84975 5.78544 6.81836 6.04644
7.00942 6.30167 7.09329 6.14476 6.78554 5.78212
6.86323 6.09520 6.99369 6.29507 6.98344 6.06194
6.81499 5.81249 6.92997 6.10534 6.96356 6.21298
7.02296 6.15261 6.76466 5.77967 6.95563 6.18993
7.02016 6.40524 6.87849 6.06308 6.55966 5.66084
6.73627 6.02395 6.91553 6.25736 6.83576 6.03535
6.52075 5.76028 6.59860 5.91208 6.70597 6.08029
6.75110 5.98833 6.53117 5.67676 6.52718 5.90572
6.65963 6.01003 6.76869 5.93226 6.44483 5.55616
6.62063 5.82533 6.72938 6.04531 6.82182 5.98277
6.64134 5.76540 6.66762 5.91378 6.83524 6.13387
6.81594 5.97907 6.60761 5.66838 6.62985 5.88151
6.76963 6.06895 6.79927 6.01991 6.52728 5.69113
6.60666 5.92841 6.72242 6.03111 6.76228 5.93898
```

```

        6.54290 5.72538 6.62469 5.92028 6.73415 6.11880
        6.74094 5.98009 6.46418 5.63517 6.61537 5.96040
        6.76185 6.15613 6.79546 6.04152 6.21529 5.70139
        6.27565 5.92508 6.40771 6.13903 6.37293 5.96883
        6.16445 5.77021 6.31242 6.05267 6.44414 6.15806
        6.53678 6.13404 . . . . .
run;

```

These data have been analyzed in Durbin and Koopman (2001, chap. 9, sec. 3). The analysis presented here is similar but not the same. In order to simplify the illustration, the monthly data have been converted to quarterly data, and two predictors (the number of kilometers traveled and the real price of petrol) are excluded from the analysis. You can also use PROC SSM to carry out the more elaborate analysis in Durbin and Koopman (2001).

One of the original reasons for studying these data was to assess the effect on f_KSI of the enactment of a seat-belt law in February 1983 that compelled the front seat passengers to wear seat belts. A simple graphical inspection of the data (not shown here) reveals that f_KSI and r_KSI do not show a pronounced upward or downward trend but do show seasonal variation, and that these two series seem to move together. Additional inspection also shows that the seasonal effect is relatively stable throughout the data span. These considerations suggest the following model for $y = (f_KSI, r_KSI)$:

$$y_t = \begin{pmatrix} X_t \\ 0 \end{pmatrix} \beta + \mu_t + \gamma_t + \xi_t$$

All the terms on the right-hand side of this equation are assumed to be statistically independent. These terms are as follows:

- The predictor X_t (defined as `Q1_83_Shift` later in the program) denotes a variable that is 0 before the first quarter of 1983, and 1 thereafter. X_t is supposed to affect only f_KSI (the first element of y); it represents the enactment of the seat-belt law of 1983.
- μ_t denotes a bivariate random walk. It is supposed to capture the slowly changing level of the vector y_t . In order to capture the fact that f_KSI and r_KSI move together (that is, they are co-integrated), the covariance of the disturbance term of this random walk is assumed to be of lower than full rank.
- γ_t denotes a bivariate trigonometric seasonal term. In this model it is taken to be fixed (that is, the seasonal effects do not change over time).
- ξ_t denotes a bivariate white noise term, which captures the residual variation that is unexplained by the other terms in the model.

The preceding model is an example of a (bivariate) basic structural model (BSM). You can formulate this model as a state space model

$$\begin{aligned}
 y_t &= Z\alpha_t + \begin{pmatrix} X_t \\ 0 \end{pmatrix} \beta \\
 \alpha_{t+1} &= T\alpha_t + \eta_{t+1} \\
 \alpha_1 &= A_1\delta + \eta_1
 \end{aligned}$$

for some suitable matrices \mathbf{Z} , \mathbf{T} , and \mathbf{A}_1 , unobserved state vectors $\boldsymbol{\alpha}_t$, and disturbance vectors $\boldsymbol{\eta}_t$. The initial state vector $\boldsymbol{\alpha}_1$ is partially diffuse: it is the sum of a mean-zero Gaussian vector $\boldsymbol{\eta}_1$ and a term $\mathbf{A}_1\boldsymbol{\delta}$ that represents the contribution from a diffuse vector $\boldsymbol{\delta}$ (a diffuse vector is a Gaussian vector with infinite covariance). See the section “[The State Space Model and Notation](#)” on page 1786 for more information about the state space model notation. In fact, each of the terms $\boldsymbol{\mu}_t$, $\boldsymbol{\gamma}_t$, and $\boldsymbol{\xi}_t$ that appear in the right-hand side of the equation that defines the BSM in this example are also governed by their own state space models. The preceding state space model is obtained by combining these submodels. In particular, the state vector $\boldsymbol{\alpha}_t$, which is of dimension 10, is formed by combining the state vectors that are associated with these three terms: the state vectors that correspond to $\boldsymbol{\xi}_t$ and $\boldsymbol{\mu}_t$ are of dimension 2, and the dimension of state vector associated with $\boldsymbol{\gamma}_t$ (a bivariate seasonal of season length 4) is 6 (three seasonal effects correspond to f_KSI and three to r_KSI). See the section “[Predefined Structural Models](#)” on page 1799 for more information. Each of the 10-dimensional matrices, the transition matrix \mathbf{T} , and the disturbance-covariance matrix \mathbf{Q} (covariance of $\boldsymbol{\eta}_t$ for $t \geq 2$) are block diagonal with blocks that correspond to the \mathbf{T} and \mathbf{Q} matrices that are associated with the state space models for $\boldsymbol{\mu}_t$, $\boldsymbol{\gamma}_t$, and $\boldsymbol{\xi}_t$. The same holds for the system matrices \mathbf{A}_1 and \mathbf{Q}_1 that are associated with the initial state $\boldsymbol{\alpha}_1$.

The following statements specify and fit this model to f_KSI and r_KSI:

```
proc ssm data=seatBelt;
  id date interval=quarter;
  Q1_83_Shift = (date >= '1jan1983'd);
  state error(2) type=WN cov(g);
  component wn1 = error[1];
  component wn2 = error[2];
  state level(2) type=RW cov(rank=1) ;
  component rw1 = level[1];
  component rw2 = level[2];
  state season(2) type=season(length=4);
  component s1 = season[1];
  component s2 = season[2];
  model f_KSI = Q1_83_Shift rw1 s1 wn1;
  model r_KSI = rw2 s2 wn2;
  eval f_KSI_sa = rw1 + Q1_83_Shift;
  forecast out=for1;
run;
```

The PROC SSM statement specifies the input data set, `seatBelt`, which contains the response variables `f_KSI` and `r_KSI`. The optional ID statement specifies an index variable, `date`. The `INTERVAL=QUARTER` option in the ID statement indicates that the measurements were collected on a quarterly basis. Next, a programming statement defines `Q1_83_Shift`, the predictor that represents the enactment of the seat-belt law of 1983. It is used later in the MODEL statement for `f_KSI`. Separate STATE statements specify the terms $\boldsymbol{\mu}_t$, $\boldsymbol{\gamma}_t$, and $\boldsymbol{\xi}_t$ since they are statistically independent. The models that govern them, white noise for $\boldsymbol{\xi}_t$, random walk for $\boldsymbol{\mu}_t$, and trigonometric seasonal for $\boldsymbol{\gamma}_t$, can all be specified by using the TYPE= option of the STATE statement. When you use the TYPE= option, you can use the COV option to specify the information about the disturbance covariance in the state transition equation. The other details, such as the transition matrix specification and the specification of \mathbf{A}_1 in the initial conation, are inferred from the TYPE= option. For $\boldsymbol{\xi}_t$ (a white noise), \mathbf{A}_1 is zero and $\mathbf{Q}_t = \mathbf{Q}$ for all $t \geq 1$, where \mathbf{Q} is specified by the COV option. For $\boldsymbol{\mu}_t$ and $\boldsymbol{\gamma}_t$ the initial condition is fully diffuse—that is, \mathbf{A}_1 is an identity matrix of appropriate order and $\mathbf{Q}_1 = 0$. The total diffuse dimension of this model, $(k + d)$, is $9 = 1 + 8$ as a result of one predictor, `Q1_83_Shift`, and two fully diffuse state subsections, $\boldsymbol{\mu}_t$ and $\boldsymbol{\gamma}_t$. The components in the model are defined by suitable linear combinations of these different state subsections. The program

statements define the model as follows:

- **state error(2) type=WN cov(g);** defines ξ_t as a two-dimensional white noise, named error, with the covariance of general form. Then two COMPONENT statements define wn1 and wn2 as the first and second elements of error, respectively.
- **state level(2) type=RW cov(rank=1);** defines μ_t as a two-dimensional random walk, named level, with covariance of general form whose rank is restricted to 1. Then two COMPONENT statements define rw1 and rw2 as the first and second elements of level, respectively.
- **state season(2) type=season(length=4);** defines γ_t as a two-dimensional trigonometric seasonal of season length 4, named season, with zero covariance—signified by the absence of the COV option. Then two COMPONENT statements define s1 and s2 as appropriate linear combinations of season so that s1 represents the seasonal for f_KSI and s2 for r_KSI. Because TYPE=SEASON in the STATE statement, the COMPONENT statement appropriately interprets **component s1 = season[1];** as s1 being a dot product: $(1\ 0\ 0\ 0\ 1\ 0) * \text{season}$. See the section “Multivariate Season” on page 1802 for more information.
- **model f_KSI = Q1_83_Shift rw1 s1 wn1;** defines the model for f_KSI, and **model r_KSI = rw2 s2 wn2;** defines the model for r_KSI.

The SSM procedure fits the model and reports the parameter estimates, their approximate standard errors, and the likelihood-based goodness-of-fit measures by default. In order to output the one-step-ahead and full-sample estimates of the components in the model, you must specify an output data set in the FORECAST statement. In addition, you can use the EVAL statement to define specific linear combinations of the underlying state that should also be estimated. The statement **eval f_KSI_sa = rw1 + Q1_83_Shift;** is an example of one such linear combination. It defines f_KSI_sa, a linear combination that represents the seasonal adjustment of f_KSI. The output data set, for1, named in the FORECAST statement contains estimates of all the model components in addition to the estimate of f_KSI_sa.

The SSM procedure output begins with a factoid (not shown here) about the input data set that provides its name. Next, the model summary table, shown in Figure 27.1, provides basic model information, such as the dimension of the underlying state equation ($m = 10$), the diffuse dimension of the model ($(d + k) = 9$), and the number of parameters (5) in the model parameter vector θ . This information is very useful in determining the computational complexity of the model.

Figure 27.1 Bivariate Basic Structural Model

The SSM Procedure	
Model Summary	
Model Property	Value
Number of Model Equations	2
State Dimension	10
Dimension of the Diffuse Initial Condition	9
Number of Parameters	5

The index variable information is shown in [Figure 27.2](#). Among other things, it categorizes the data to be of regular type, which implies that the data are time series.

Figure 27.2 Index Variable Information

ID Variable Information				
Name	Start	End	MaxDelta	Type
date	1969:1	1985:4	1.00	Regular

[Figure 27.3](#) provides simple summary information about the response variables. It shows that `f_KSI` and `r_KSI` have four missing values each and no induced missing values since the predictor in the model, `Q1_83_Shift`, has no missing values.

Figure 27.3 Response Variable Summary

Response Variable Information							
Name	NObs	NMiss	Induced	Minimum	Maximum	Mean	StdDev
			NMiss				
f_KSI	68	4	0	6.16	7.09	6.71	0.21
r_KSI	68	4	0	5.56	6.41	5.97	0.19

The regression coefficient of `Q1_83_Shift`, shown in [Figure 27.4](#), is negative and is statistically significant. This is consistent with the expected drop in `f_KSI` after the enactment of the seat-belt law.

Figure 27.4 Regression Coefficient of `Q1_83_Shift`

Estimates of the Regression Parameters					
Response Variable	Regression Variable	Estimate	Approx Std Error	t Value	Approx Pr > t
f_KSI	Q1_83_Shift	-0.40836	0.02594	-15.74	<.0001

[Figure 27.5](#) shows the estimates of the elements of θ . For reporting purposes, the elements of θ are categorized as those specified by using a PARMS statement, and others are unknown elements of partially specified system matrices. In this example, no PARMS statement is used. The five parameters in θ correspond to unknown elements that are associated with the (partially) specified covariance matrices in the specifications of error and level. Whenever a covariance specification is of a general form and is not defined by a user-specified variable list, it is internally parameterized as a product of its Cholesky root: $\text{Cov} = \text{Root Root}'$. This ensures that the resulting covariance is positive semidefinite. The Cholesky root is constrained to be lower triangular, with positive diagonal elements. If rank constraints (such as the rank-one constraint on the covariance in the specification of level) are imposed, the number of free parameters in the Cholesky factor is reduced appropriately. See the section “[Covariance Parameterization](#)” on page 1804 for more information. In view of these considerations, the five parameters in θ are a result of three parameters from the Cholesky

root of error and two parameters that are associated with the Cholesky root of level.

Figure 27.5 Parameter Estimates

Maximum Likelihood Estimates of the Unknown System Parameters (Parameters Not Specified in the PARMS Statement)				
Component	Type	Parameter	Estimate	Approx Std Error
error	Disturbance Covariance	RootCov[1, 1]	0.03615	0.0073632
error	Disturbance Covariance	RootCov[2, 1]	0.03380	0.01131
error	Disturbance Covariance	RootCov[2, 2]	0.04620	0.0046973
level	Disturbance Covariance	RootCov[1, 1]	0.03752	0.0084330
level	Disturbance Covariance	RootCov[2, 1]	0.02230	0.0056906

Figure 27.6 shows the resulting covariance estimate of error after multiplying the Cholesky factors. The lower triangle (including diagonal) shows the covariances, and the upper triangle shows the correlations.

Figure 27.6 White Noise Covariance and Correlation Estimates

Estimate of the Error Covariance for the state error (covariances in the lower half and the correlations in the upper half)	
0.001307	0.590417
0.001222	0.003277

Similarly, Figure 27.7 shows the covariance estimate of level disturbance. Note that, because of the rank-one constraint, the correlation estimate is exactly equal to 1.0.

Figure 27.7 Covariance and Correlation Estimates of the Random Walk Disturbance

Estimate of the Error Covariance for the state level (covariances in the lower half and the correlations in the upper half)	
0.001408	1
0.000837	0.000497

Figure 27.8 shows the likelihood-based goodness-of-fit measures. This table is produced by using the fitted model to carry out the filtering operation on the data. You can use these goodness-of-fit measures to compare different models. The table also shows some other useful information—for example, it reports that S_{n,p_n} is of full rank (Initialized Diffuse State Elements = 9), which implies that the filtering process was successfully initialized. See the section “Likelihood Computation and Model Fitting Phase” on page 1794 for more information.

Figure 27.8 Likelihood-Based Goodness-Of-Fit Measures

Likelihood Based Fit Statistics	
Statistic	Value
Non-Missing Response Values Used	128
Estimated Parameters	5
Initialized Diffuse State Elements	9
Normalized Residual Sum of Squares	119
Full Log Likelihood	166.16
AIC (smaller is better)	-322.3
BIC (smaller is better)	-308.4
AICC (smaller is better)	-321.8
HQIC (smaller is better)	-316.7
CAIC (smaller is better)	-303.4

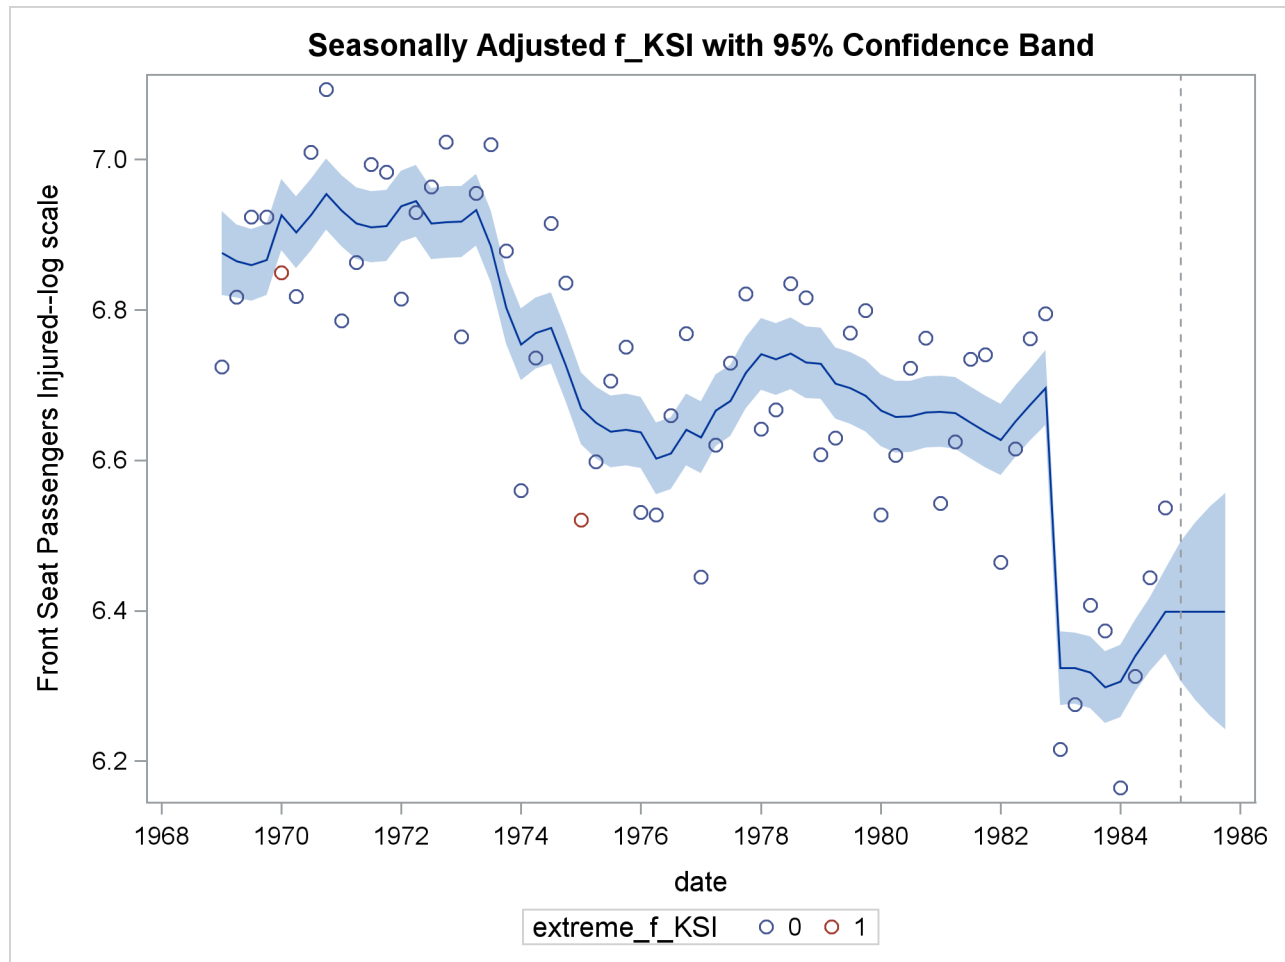
The output data set, `for1`, specified in the `FORECAST` statement contains one-step-ahead and full-sample estimates of all the model components and the user-specified components (defined by the `EVAL` statement). Their standard errors and the upper and lower confidence limits (by default, 95%) are also produced. In addition, `for1` contains estimates of additive-outliers—`ao_f_KSI` and `ao_r_KSI` (and their standard errors)—for `f_KSI` and `r_KSI`. The following `DATA` step adds a zero-one variable `extreme_f_KSI` to `for1`, which assigns the value 1 to observations with an unusually high or low value of `ao_f_KSI`.

```
data for1;
  set for1;
  if stderr_ao_f_KSI > 0 then
    ao_z_stat = ao_f_KSI/stderr_ao_f_KSI;
  else ao_z_stat = 0.0;
  extreme_f_KSI = (abs(ao_z_stat) > 2);
run;
```

The following statements use the `for1` data set to produce a time series plot of the seasonally adjusted `f_KSI` that highlights the additive outliers:

```
proc sgplot data=for1;
  title "Seasonally Adjusted f_KSI with 95% Confidence Band";
  band x=date lower=smoothed_lower_f_KSI_sa
    upper=smoothed_upper_f_KSI_sa ;
  series x=date y=smoothed_f_KSI_sa;
  reffline '1jan1985'd / axis=x lineattrs=(pattern=shortdash)
    LEGENDLABEL= "Start of Multi-Step Forecasts"
    name="Forecast Reference Line";
  scatter x=date y=f_KSI /group=extreme_f_KSI;
run;
```

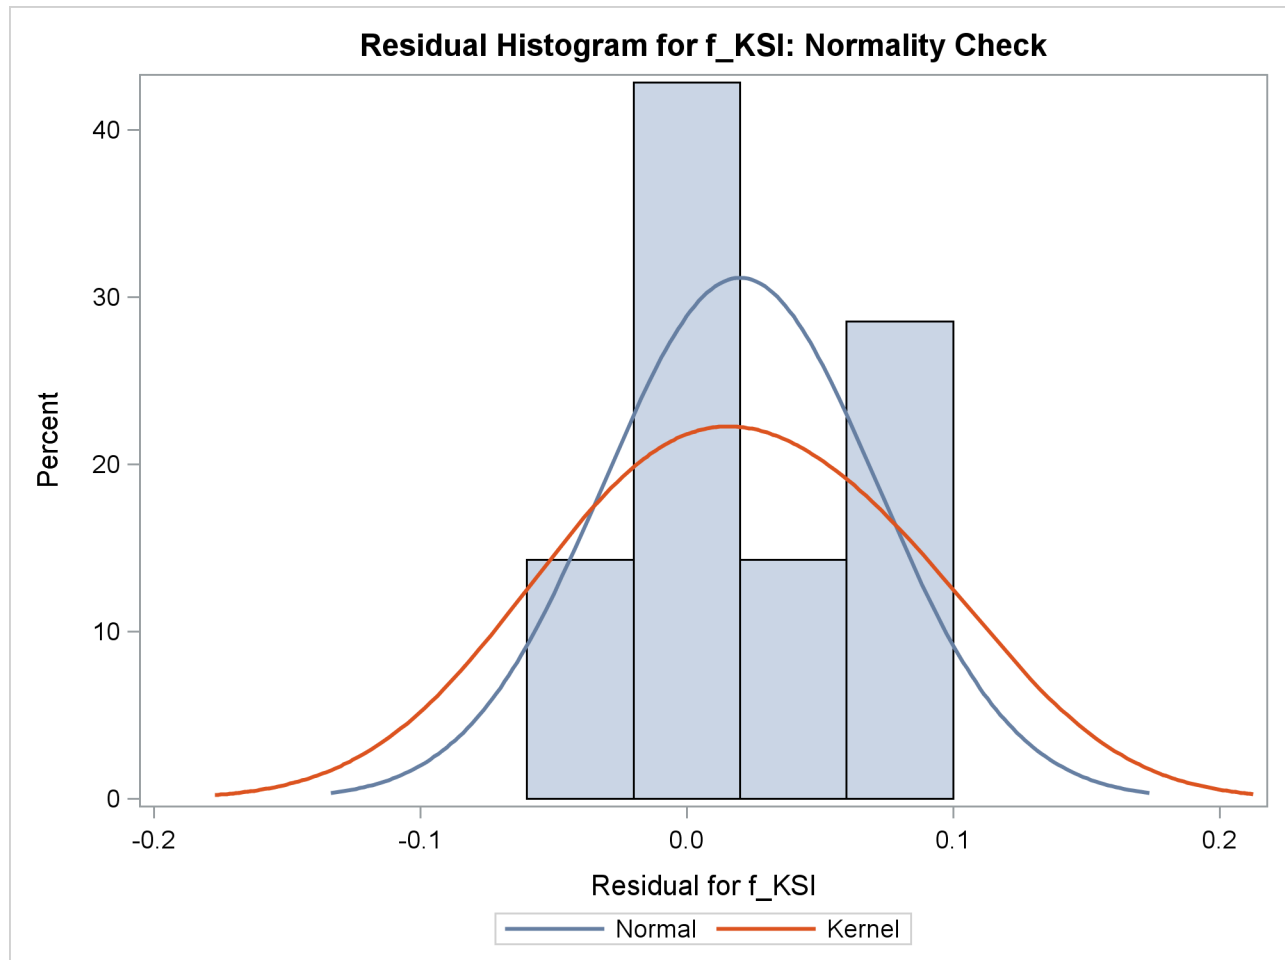
The generated plot is shown in [Figure 27.9](#).

Figure 27.9 Plot of Seasonally Adjusted f_KSI that Highlights the Additive Outliers

The output data set, `for1`, also contains one-step-ahead residuals for f_KSI and r_KSI . You can use them for a variety of model diagnostic checks. For example, you can check the normality of the residuals by inspecting the residual-histogram. The following statements produce a residual-histogram for f_KSI :

```
proc sgplot data=for1;
  title "Residual Histogram for f_KSI: Normality Check";
  histogram residual_f_KSI;
  density residual_f_KSI/type=normal;
  density residual_f_KSI/type=kernel;
run;
```

Figure 27.10 shows the generated histogram along with the normal and kernel density estimates. It does not show any significant violation of the normality assumption.

Figure 27.10 Residual Histogram for f_KSI

Syntax: SSM Procedure

The SSM procedure uses the following statements:

```

PROC SSM < options > ;
  BY variables ;
  COMPONENT name = (variables) * state ;
  EVAL name = expression ;
  FORECAST < options > ;
  ID variable < option > ;
  IRREGULAR name < options > ;
  MODEL response = variables ;
  PARMS variables < / options > ;
  Programming statements ;
  STATE name( dim ) < options > ;
  TREND name( type ) < options > ;

```

All statements except the BY, ID, and the FORECAST statements can be used multiple times. The PROC SSM statement and at least one MODEL statement are required. In addition to these statements, you can use most DATA step programming statements to define new variables that are needed for specifying different parts of the state space model.

Functional Summary

Table 27.1 summarizes the statements and options that control the SSM procedure. Most commonly needed scenarios are listed; see the individual statements for additional details.

Table 27.1 Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	PROC SSM	DATA=
Writes series and component forecasts to an output data set	FORECAST	OUT=
Model Specification		
Specifies the index variable	ID	
Defines variables as model parameters	PARMS	
Specifies a response variable and the associated observation equation	MODEL	
Specifies a state subsection	STATE	
Specifies the transition matrix of a state subsection	STATE	T
Specifies the disturbance covariance matrix of a state subsection	STATE	COV
Specifies the size of the diffuse initial condition of a state subsection	STATE	A1
Specifies the initial covariance matrix of a state subsection	STATE	COV1
Specifies a state subsection for a predefined structural model	STATE	TYPE=
Specifies a component	COMPONENT	
Specifies a predefined trend component	TREND	
Controlling the Output		
Specifies the significance level of the forecast confidence limits	FORECAST	ALPHA=
Specifies a linear combination of components to be output	EVAL	
BY Groups		
Specifies BY group processing	BY	

PROC SSM Statement

PROC SSM *< option >* ;

The PROC SSM statement is required. The following *option* can be used in the PROC SSM statement:

DATA=SAS-data-set

specifies the name of the SAS data set that contains the variables needed for the analysis. If this option is not specified in the PROC SSM statement, the most recently created SAS data set is used.

BY Statement

BY *variables* ;

A BY statement can be used in the SSM procedure to process a data set in groups of observations that are defined by the BY variables. The model specified by using the MODEL and other statements is applied to all the groups defined by the BY variables. When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables. The variables are one or more variables in the input data set.

COMPONENT Statement

COMPONENT *name* = (*var1 var2 ...*) * *state* ;

COMPONENT *name* = *state*[*integer*] ;

The COMPONENT statement specifies a component (a linear combination of state elements), named *name*. *name* can later be used as a right-hand side term in the MODEL statement, which defines the observation equation. Its estimate is output to the OUT= data set that is specified in the FORECAST statement.

The first form of the COMPONENT statement defines a component as a dot product of a state subsection *state* and a row vector (*var1 var2 ...*). The value of *state* must be the name of a state subsection defined by using a STATE statement elsewhere in the program. The row vector (*var1 var2 ...*), either a list of numbers or a list of variables, must be of the same dimension as the state subsection defined by *state*. This form—also called the explicit dot product form—of the component specification is unambiguous; however, it requires detailed knowledge of the state vector underlying the *state* specification. Suppose *state0* is a two-dimensional state defined by a STATE statement elsewhere in the program and *X1* and *X2* are (numeric) predictor variables. The following are valid examples of the dot product form of the COMPONENT statement:

```
component c1 = (x1 x2) * state0;
component c2 = (1 1) * state0;
```

The second form of the COMPONENT statement is a shortened version of the first form; it defines the component as a particular element of *state*—for example, *state*[3] defines the component as the third element of *state*. The specified *integer* must lie between 1 and *dim*, the dimension of *state*. The second form of component specification has another important use when the STATE statement that defines *state* uses the TYPE= option to set its type. In this case the second form of the component specification assumes additional meaning for the types LL, SEASON, and CYCLE. For example, if *state* is a three-dimensional seasonal component, *state*[2] signifies an appropriate linear combination of *state* that results in the second of the three seasonals that constitute the three-dimensional seasonal. Similar interpretation holds for the types LL and CYCLE. See the sections “Multivariate Season” on page 1802 and “Predefined Structural Models” on page 1799 for more information.

EVAL Statement

EVAL *name* = *number1***variable1* + *number2***variable2* + ... ;

The EVAL statement defines a linear combination, named *name*, of the right-hand side terms used in a MODEL statement. Any variables (for example, predictor variables and names of components) can be used in the expression of the EVAL statement; however, any observation disturbances defined by the IR-REGULAR statement cannot be used in this expression. Suppose C1 and C2 are two components (defined by COMPONENT statements elsewhere in the program), T1 is a trend component, and X1 is a regression variable used in a model. The following are valid examples of the EVAL statement:

```
eval e1 = c1 - c2;
eval e2 = t1 + c1 + x1;
eval e2 = t1 + 2*c1 - 1.5*x1;
```

The estimates of linear combinations defined by the EVAL statement (for example, E1, E2, and E3) are output to the OUT= data set that is specified in the FORECAST statement.

FORECAST Statement

FORECAST < *options* > ;

The FORECAST statement specifies an output data set to store the estimates of the model components and series forecasts.

ALPHA=*number*

specifies the significance level of the forecast confidence intervals. For example, ALPHA=0.05, which is the default, results in a 95% confidence interval.

OUT=*SAS-data-set*

specifies an output data set for the forecasts. The output data set contains the ID variable (if specified), the response variables, the one-step-ahead and out-of-sample response variable forecasts, the forecast confidence intervals, the smoothed values of the response series, and the one-step-ahead and smoothed

estimates of the model components—including expressions defined by using the EVAL statement. See the section “[OUT= Data Set](#)” on page 1808 for more information.

ID Statement

ID *variable* < *option* > ;

The ID statement names a numeric variable to associate a sequence value—usually related to a time stamp—to the observations in the input data set. The observations within a BY group must be ordered in ascending order by the ID variable. Often the ID variable’s values are SAS date, time, or datetime values, and each observation within a BY group has a unique ID value. Generally, however, the ID variable can be any numeric variable, and there can be multiple observations with the same ID value. If the ID values are SAS date, time, or datetime values, you can specify the frequency associated with the time series by using the INTERVAL= option. If an ID statement is not specified, the observation number, with respect to the BY group, is used as the time ID. Whenever an ID variable is specified, a variable, `_ID_DELTA_`, is automatically created that can be used as any input data set variable in the programming statements. `_ID_DELTA_` contains the distance between two successive ID values. The first `_ID_DELTA_` value is arbitrarily taken as one. If the INTERVAL= option is specified, the distance between the ID values is measured in terms of the number of intervals; therefore, for regularly spaced data, `_ID_DELTA_` is identically equal to one. The following *option* can be used in the ID statement:

INTERVAL=*value*

specifies the time interval between observations. INTERVAL=*value* is used in conjunction with the ID variable to check that the input data are in proper order. For a complete discussion of the intervals supported, see Chapter 4, “[Date Intervals, Formats, and Functions](#).”

IRREGULAR Statement

IRREGULAR *name* < *option* > ;

The IRREGULAR statement specifies a one-dimensional white noise component, which can be used to specify the observation error in a MODEL statement. The following *option* can be used in the IRREGULAR statement:

VARIANCE=*variable* | *number*

specifies the variance of the white noise. Any nonnegative value, including zero, is permissible. If the *variable* contains unknown parameters, they are estimated from the data. Similarly, if the VARIANCE= option is not specified, the variance is estimated from the data.

MODEL Statement

MODEL *response* = *variables* ;

A MODEL statement specifies an observation equation that describes a response variable as a sum of regression effects and components defined in the program. The response variable must be a numeric variable from the input data set. The variables used in the right-hand side of the model expression can be numeric variables from the input data set, numeric variables defined by using programming statements, or names of components defined by using the COMPONENT, TREND, or IRREGULAR statements.

In the case of a multivariate model, a separate MODEL statement is needed for each of the response variables. In this case, the observation errors, defined by using an IRREGULAR statement, must be different in each MODEL statement.

PARMS Statement

PARMS *variable*< =*number*> *variable*< =*number*> < / *options* > ;

The PARMS statement declares the parameters of a model and optionally sets their initial values. You can also specify the lower and upper limits of their validity range. The parameters declared by using the PARMS statement are called *named parameters* throughout this chapter. A model can have additional parameters—any unspecified quantity in the model specification becomes part of the parameter vector.

LOWER=(*number1 number2 ...*)

LOWER=(*number*)

specifies the lower bounds for the specified parameters. The list can contain exactly one number, which is taken to be the lower bound for all the listed parameters in the statement, or it must contain as many values as the number of parameters specified. A missing value, denoted by ., is a permissible value, which signifies that the parameter has no lower bound.

UPPER=(*number1 number2 ...*)

UPPER=(*number*)

specifies the upper bounds for the specified parameters. The list can contain exactly one number, which is taken to be the upper bound for all the listed parameters in the statement, or it must contain as many values as the number of parameters specified. A missing value, denoted by ., is a permissible value, which signifies that the parameter has no upper bound.

Programming Statements

To define the model, you can use most of the programming statements that are allowed in the SAS DATA step. See the *SAS Language Reference: Dictionary* for more information. The syntax of programming statements used in PROC SSM is identical to that used in the MODEL procedure (see Chapter 19, “[The MODEL Procedure](#)”) and the NLMIXED procedure (see Chapter 63, “[The NLMIXED Procedure](#)” (*SAS/STAT User’s Guide*)). There is one more restriction: the data step lagging and differencing functions are not allowed.

STATE Statement

STATE *name (dim) < options >* ;

Recall the state equations that define the state space model (see the section “The State Space Model and Notation” on page 1786):

$$\begin{aligned}\alpha_{t+1} &= \mathbf{T}_t \alpha_t + \eta_{t+1} \\ \alpha_1 &= \mathbf{A}_1 \delta + \eta_1\end{aligned}$$

A STATE statement specifies a subsection of the overall state vector α_t . You can specify multiple STATE statements, each specifying a separate subsection. It is assumed that the subsections specified by using different STATE statements are mutually independent. This independence assumption implies a block-diagonal structure for the transition matrices \mathbf{T}_t and the disturbance covariances \mathbf{Q}_t for all $t \geq 1$. An appropriate block structure also applies to \mathbf{A}_1 . The *options* in the STATE statement provide complete control over the description of the relevant blocks of \mathbf{T}_t , \mathbf{Q}_t , and \mathbf{A}_1 . Generally, the argument *dim*—a positive integer in *name (dim)*—specifies the dimension of this subsection. However, when the **TYPE=** option is used, the meaning of *dim* is different. The **TYPE=** option simplifies the state specification task for some commonly needed models.

You can use the following *options* in the STATE statement to specify the system matrices \mathbf{T}_t , \mathbf{Q}_t , and \mathbf{A}_1 :

A1(nd)

specifies that the last *nd* elements of the state subsection should be treated as diffuse, which becomes the dimension of the relevant subsection of the diffuse vector δ . The \mathbf{A}_1 block is created by using appropriate columns of the identity matrix. *nd* must lie between one and *dim*. The absence of this option signifies that this subsection of α_t is nondiffuse. If both **COV1** and A1 options are specified, the last *nd* rows and columns of the matrix specified in **COV1** are taken to be zero. This option cannot be used together with the **RANK=** option of the **COV1** option.

COV(D) <= (var1 var2 ...) | (number1 number2 ...) >

COV(G) <= (var1 var2 ...) | (number1 number2 ...) >

COV(I) <= (variable) | (number) >

COV(RANK=integer)

specifies the relevant block of the disturbance covariance \mathbf{Q}_t (for $t \geq 2$) in the transition equation. Similar to the **T** option, the absence of this option signifies that this Q-block consists of only zeros. The structure of the Q-block is also similarly specified. However, the following differences exist:

- The list specified to form the covariance must result in a symmetric, positive semidefinite matrix. For an example, see [Example 27.4](#).
- You can specify a rank constraint on the Q-block by specifying **COV(RANK=integer)**, where the specified integer must lie between 1 and *dim*. A rank constraint is permissible only for the general form, and only when its elements are not specified by using a list.
- The convention of treating unset variables as structural zeros, used in specifying sparsity of the T-block, is not used in the Q-block specification. Whenever you explicitly specify the entries of

the Q-block by specifying a list of variables in parentheses, all variables in the list must evaluate to nonmissing values.

The following examples illustrate different ways of specifying a Q-block. It is assumed that $dim = 2$.

- COV(G) specifies a general form Q-block (contributes $(2 * (2 + 1))/2 = 3$ unspecified elements to the parameter vector θ).
- COV(RANK=1) specifies a rank-one Q-block.

COV1(D) <= (var1 var2 ...) | (number1 number2 ...)>

COV1(G) <= (var1 var2 ...) | (number1 number2 ...)>

COV1(I) <= (variable) | (number)>

COV1(RANK=integer)

specifies the relevant block of the initial state covariance Q_1 . The different options in this case have the same meaning as the options of the COV option. However, the following differences exist:

- If the elements of Q_1 are specified by a list of variables in parentheses, then these variables must evaluate to constant values. In particular, they can depend on parameters defined by the PARMS statements; however, they cannot depend on any of the input data columns.
- If the initial condition is partially diffuse (that is, the diffuse dimension nd specified in the A1 option is nonzero), the last nd rows and columns of the matrix specified in COV1 are taken to be zero. Moreover, if the elements of Q_1 are specified by a list, its number of elements must correspond to a matrix of dimension $(dim - nd)$.

T(D) <= (var1 var2 ...) | (number1 number2 ...)>

T(G) <= (var1 var2 ...) | (number1 number2 ...)>

T(I) <= (variable) | (number)>

specifies the relevant block of the transition matrix T_t . The absence of this option signifies that this block consists of only zeros. You can specify the structure of the T-block by specifying T(I) for the identity form, T(D) for the diagonal form, and T(G) for a general unstructured form. In addition, you can explicitly specify the entries of the T-block by specifying a list of numbers in parentheses, or by specifying in parentheses a list of variables that are defined by using the programming statements. The unspecified elements of the T-block are included in the list of parameters to be estimated from the data. If the elements of the T-block are supplied by a list in parentheses, the number of elements in the list depends on its structure. For the diagonal form, the list must contain exactly dim elements. In the case of the identity form—T(I)—the block is already fully specified; however, a specification $T(I)=(variable)$ is understood to mean that the identity block is scaled by the specified *variable* (or a *number*). In the general case—T(G)—the list must consist of $dim * dim$ elements, specified in a rowwise fashion. An inappropriate number of elements in the list results in a syntax error.

The following examples illustrate different ways of specifying the transition matrix. It is assumed that $dim = 2$.

- T(I) specifies that the T-block is a two-dimensional identity matrix.
- T(D) specifies that the T-block is a two-dimensional diagonal matrix. The two unspecified diagonal entries become part of the parameter vector θ .

- $T(D)=(1.1\ 2)$ fully specifies the two-dimensional diagonal T-block.
- $T(D)=(X_1\ X_2)$ specifies a two-dimensional diagonal T-block where the diagonal elements are dynamically calculated based on the values of the variables X_1 and X_2 . In this case the T-block can change with time if X_1 or X_2 change with time.
- $T(G)$ specifies a general form T-block (with $2^2 = 4$ unspecified elements).
- $T(G)=(X_1\ X_2\ X_3\ X_4)$ specifies a general form T-block where the first row is formed by X_1 and X_2 , and the second row is formed by X_3 and X_4 .

In practice the transition matrix is often sparse—that is, many of its elements are zero. The algorithms in the SSM procedure exploit this sparsity structure for computational efficiency. Whenever you explicitly specify the entries of the T-block by specifying a list of variables in parentheses, you can leave the variables that correspond to the zero elements *unset*. These unset variables are treated as structural zeros by the SSM procedure. The section “[Sparse Transition Matrix Specification](#)” on page 1791 further explains how to use this sparsity convention.

TYPE=WN

TYPE=RW

TYPE=LL (SLOPECOV(I | D | G) <= (var1, var2, ...) | (number1, number2, ...) >)

TYPE=LL (SLOPECOV(RANK=*integer*))

TYPE=SEASON(LENGTH=*integer*)

TYPE=CYCLE <(<CT> <RHO=*variable* | *number*> <PERIOD=*variable* | *number*>)>

specifies a state subsection that corresponds to the specified type. You can specify either a number or a variable for the RHO= and PERIOD= suboptions. The **T**, **COV1**, and **A1** options are not needed. In fact they are ignored, since the transition matrix T_t and the matrices in the initial condition (Q_1 and A_1) are implicitly defined by the choice of the type. However, the specification of the **COV** option does play a key role in the eventual form of Q_t —the covariance of the disturbance term in the transition equation. For the types LL, SEASON, and CYCLE, the dimension of the resulting state subsection is a certain multiple of *dim*, the dimension in the STATE statement. For example, the following specification results in a state subsection, named `cycleState`, of dimension $2*dim$:

```
state cycleState(dim) cov(g) type=cycle;
```

The name `cycleState` corresponds to the state underlying a *dim*-dimensional cycle component. All of these special state types require that the data be regular; the only exception is **TYPE=CYCLE(CT)**, which defines a continuous-time cycle and is applicable to any data type. [Table 27.2](#) summarizes some of this information for easy reference. Additional details about these state types are provided in the section “[Predefined Structural Models](#)” on page 1799.

The **TYPE=LL** specification results in a state that corresponds to a multivariate local linear trend. It is governed by two covariance matrices: the **COV** option specifies the covariance that corresponds to the level equation, and the **SLOPECOV** suboption specifies the covariance used in the slope equation. The form of the **SLOPECOV** suboption is exactly the same as that of the **COV** option.

The **TYPE=CYCLE** option results in a state that corresponds to a (stochastic) cycle. By default, this cycle is assumed to be for the regular data type. If **TYPE=CYCLE(CT)**, the resulting cycle is applicable to any data type. The CT option is available only for $dim = 1$; that is, only a univariate cycle is available for the irregular data type. The cycle specification depends on a covariance matrix

and two numbers: the damping factor **RHO** and the cycle period **PERIOD**. The covariance can be specified by the **COV** option. The damping factor is specified by the **RHO=** suboption; its value must lie between 0.0 and 1.0. The cycle period can be specified by the **PERIOD=** suboption. If the **CT** option is not included, the period value must be larger than 2.0. On the other hand, if the **CT** option is included, its value must be strictly positive. If these parameters are not specified, they are estimated from the data.

Table 27.2 Summary of Predefined State Types

Type	Description	Parameters	State Dimension
WN	<i>dim</i> -variate white noise	COV	<i>dim</i>
RW	<i>dim</i> -variate random walk	COV	<i>dim</i>
LL	<i>dim</i> -variate local linear	COV , SLOPECOV	$2 * dim$
SEASON(LENGTH=length)	<i>dim</i> -variate season	COV	$(length - 1) * dim$
CYCLE	<i>dim</i> -variate cycle	COV , RHO , PERIOD	$2 * dim$

TREND Statement

TREND *name* (*type*) < *options* > ;

The **TREND** statement defines a trend term in the model. Loosely speaking, a trend is a special type of component that captures the time-varying level of the data. The *options* in the **TREND** statement enable you to specify a wide variety of commonly used trend patterns. Each **TREND** specification in effect stands for a special pair of **STATE** and **COMPONENT** statements. You can specify more than one **TREND** specification. Each separate trend specification defines a component that is assumed to be independent of all other component specifications in the model.

Some of these trend specifications are applicable to all the data types—that is, they can be used for regular data types in addition to irregular data types, while the others require that the data be regular or regular-with-replication. Of course, the trend specification is only a part of the overall model specification. Therefore, the other parts of the model can imply additional constraints on the data type.

Table 27.3 lists the available trend models and their data requirements. The “type” column shows the admissible keywords that signify the particular trend type. For brevity, the “Data Type” column in Table 27.3 groups the regular and regular-with-replication data types into one category—regular. The section “Predefined Trend Models” on page 1797 provides additional details about these trend models.

Table 27.3 Summary of Trend Types

<i>type</i>	Data Type	Description	Parameters
RW	Regular	Random walk	Level σ^2
LL	Regular	Local linear	Level and slope σ_1^2, σ_2^2
DLL	Regular	Damped local linear	Level and slope σ_1^2, σ_2^2 , damping factor ϕ
PS(<i>order</i>)	Irregular	Polynomial spline of order up to 3	Level σ^2
DECAY	Irregular	A type of decay pattern	Level σ^2 , decay rate ϕ
DECAY(<i>OU</i>)	Irregular	Ornstein-Uhlenbeck decay pattern	Level σ^2 , decay rate ϕ
GROWTH	Irregular	A type of growth pattern	Level σ^2 , growth rate ϕ
GROWTH(<i>OU</i>)	Irregular	Ornstein-Uhlenbeck growth pattern	Level σ^2 , growth rate ϕ

The following example specifies polySpline as a trend of type polynomial spline of order 2:

```
trend polySpline(ps(2));
```

Similarly, the following statement defines dampedTrend as a damped local linear trend:

```
trend dampedTrend(dll) slopevar=x;
```

The variance parameter that governs the slope equation of this trend type is given by a variable *x*, which must be defined elsewhere in the program. The other parameters that define dampedTrend are left unspecified.

You can specify the following *options* in the TREND statement to specify the trend parameters. In addition, you can create a custom combination of given trend type by specifying the CROSS= option to create a more general trend. For an example of the use of CROSS= option, see the discussion of the second model in [Example 27.3](#).

CROSS=(var1, var2, ...)

creates a linear combination of one or more independent trend components based on the variables in the list. If the parameters of the trend are specified by options such as the LEVELVAR= option or the PHI= option, these parameters are shared by these constituent trends. For example, suppose that the CROSS= list contains two variables (X_1 and X_2) and the trend specification is of the type RW. The effect of CROSS=(X_1, X_2) is to create a component $\mu_t = X_1\mu_{1,t} + X_2\mu_{2,t}$ where $\mu_{1,t}$ and $\mu_{2,t}$ are two independent random walk trends. Moreover, if the random walk trend specification uses the LEVELVAR= option to specify the variance parameter, $\mu_{1,t}$ and $\mu_{2,t}$ share the same variance parameter; otherwise, two separate variance parameters are assigned to these random walks. The CROSS= option is useful for a variety of situations. For example, suppose X is an indicator variable that is 1 before certain time point t_0 and 0 thereafter; CROSS=(X) has the effect of turning off the trend component after time t_0 . Similarly, suppose G_1 and G_2 are indicators for gender—for example, $G_1 = (\text{GENDER}=\text{"M"})$ and $G_2 = (\text{GENDER}=\text{"F"})$. Then CROSS=(G_1, G_2) creates a trend that varies with the gender of the observation. The variables in the CROSS= list must be free of unknown parameters.

The CROSS= option can be computationally expensive; computationally it is equivalent to specifying as many separate trends as the number of variables in the specified list.

LEVELVAR=*variable* | *number*

specifies the disturbance variance parameter for all the trend types. For trend types LL and DLL, this option specifies σ_1^2 . Any nonnegative value, including zero, is permissible. If *variable* contains unknown parameters, they are estimated from the data. Similarly, if the LEVELVAR= option is not specified, σ^2 is estimated from the data.

PHI=*variable* | *number*

specifies the value of ϕ for trend types DLL, DECAY, DECAY(OU), GROWTH, and GROWTH(OU). For the type DLL, the specified value must be between 0.0 and 1.0. For types DECAY and DECAY(OU), ϕ must be strictly negative. For types GROWTH and GROWTH(OU), ϕ must be strictly positive. If *variable* contains unknown parameters, they are estimated from the data. Similarly, if the PHI= option is not specified, ϕ is estimated from the data.

SLOPEVAR=*variable* | *number*

specifies the second disturbance variance parameter, σ_2^2 , for trend types LL and DLL. Any nonnegative value, including zero, is permissible. If *variable* contains unknown parameters, they are estimated from the data. Similarly, if the SLOPEVAR= option is not specified, σ_2^2 is estimated from the data.

Details

Throughout this section, vectors and matrices are denoted by bold-faced letters. Generally, Greek letters (such as α , β , and ϵ) denote unobserved or latent quantities—often estimated by using the data—that represent model parameters, latent states, or noise variables. Letters such as X , Y , and Z are used to denote the observed data variables. Whenever it is unambiguous, it is assumed that the matrices have appropriate dimensions when they are being multiplied—in particular, the vectors behave as column-vectors or row-vectors as the need arises. On many occasions, matrices are described in-line—that is, they are described as parenthesized lists, in a rowwise fashion, with the rows separated by a comma. The term “dot product” is used to describe the scalar that results from the product of a row-vector with a (conforming) column vector.

The State Space Model and Notation

The (linear) state space model is described in the literature in a few different ways and with varying degree of generality. The description given in this section loosely follows the description given in Durbin and Koopman (2001) (chap. 6, sec. 4). This formulation of SSM is quite general; in particular, it includes nonstationary SSMs with time-varying system matrices and state equations with diffuse initial condition (precise definitions of these terms are given later in this subsection).

Suppose that observations are collected in a sequential fashion (indexed by a numeric variable τ) on some variables: vector $\mathbf{y} = (y_1, y_2, \dots, y_q)$, which denotes the q -variate response values, and the k -dimensional vector \mathbf{x} , which denotes the predictors. Suppose that the observation instances are $\tau_1 < \tau_2 < \dots < \tau_n$. The possibility that multiple observations are taken at a particular instance τ_i is not ruled out, and the successive observation instances need not be regularly spaced—that is, $(\tau_2 - \tau_1)$ need not equal $(\tau_3 - \tau_2)$. For $t = 1, 2, \dots, n$, suppose $p_t (\geq 1)$ denotes the number of observations recorded at instance τ_t . For

notational simplicity, an integer-valued secondary index t is used to index the data so that $t = 1$ corresponds to $\tau = \tau_1$, $t = 2$ corresponds to $\tau = \tau_2$, and so on. Consider the following model:

$$\begin{aligned} \mathbf{Y}_t &= \mathbf{Z}_t \boldsymbol{\alpha}_t + \mathbf{X}_t \boldsymbol{\beta} + \boldsymbol{\epsilon}_t && \text{Observation equation} \\ \boldsymbol{\alpha}_{t+1} &= \mathbf{T}_t \boldsymbol{\alpha}_t + \boldsymbol{\eta}_{t+1} && \text{State transition equation} \\ \boldsymbol{\alpha}_1 &= \mathbf{A}_1 \boldsymbol{\delta} + \boldsymbol{\eta}_1 && \text{Initial condition} \end{aligned}$$

The following list describes these equations:

- The *observation equation* describes the relationship between the $(q * p_t)$ -dimensional response vector \mathbf{Y}_t and the unobserved vectors $\boldsymbol{\alpha}_t$, $\boldsymbol{\beta}$, and $\boldsymbol{\epsilon}_t$. The q -variate responses are vertically stacked in a column to form this $(q * p_t)$ -dimensional response vector \mathbf{Y}_t . The m -dimensional vectors $\boldsymbol{\alpha}_t$ are called *states*, the k -dimensional vector $\boldsymbol{\beta}$ is the regression vector associated with predictors \mathbf{x} , and the $(q * p_t)$ -dimensional vectors $\boldsymbol{\epsilon}_t$ are called the *observation disturbances*. The matrices \mathbf{Z}_t (of dimension $(q * p_t) \times m$) and \mathbf{X}_t (of dimension $(q * p_t) \times k$) correspond to the *state effect* and the *regression effect*, respectively. The elements of \mathbf{X}_t are assumed to be fully known. The states $\boldsymbol{\alpha}_t$ and the disturbances $\boldsymbol{\epsilon}_t$ are *random* sequences. It is assumed that $\boldsymbol{\epsilon}_t$ is a sequence of independent, zero-mean, Gaussian random vectors with diagonal covariances, with the diagonal elements denoted by $\sigma_{t,i}^2, i = 1, 2, \dots, q * p_t$.
- The state sequence $\boldsymbol{\alpha}_t$ is assumed to follow a Markovian structure described by the *state transition equation* and the associated *initial condition*.
- The state transition equation postulates that a new instance of the state, $\boldsymbol{\alpha}_{t+1}$, is obtained by multiplying its previous instance, $\boldsymbol{\alpha}_t$, by an m -dimensional square matrix \mathbf{T}_t (called the state transition matrix) and by adding a random disturbance vector $\boldsymbol{\eta}_{t+1}$. The m -dimensional state disturbance vectors $\boldsymbol{\eta}_t$ are assumed to be independent, zero-mean, Gaussian random vectors with covariances \mathbf{Q}_t (not necessarily diagonal).
- The initial condition describes the starting condition of the state evolution equation. The starting state vector $\boldsymbol{\alpha}_1$ is assumed to be partially diffuse: it is the sum of a mean-zero Gaussian vector $\boldsymbol{\eta}_1$ and a term $\mathbf{A}_1 \boldsymbol{\delta}$ that represents the contribution from a d -dimensional diffuse vector $\boldsymbol{\delta}$ (a diffuse vector is a Gaussian vector with infinite covariance). The $m \times d$ matrix \mathbf{A}_1 is assumed to be completely known.
- The observation disturbances $\boldsymbol{\epsilon}_t$ and the state disturbances $\boldsymbol{\eta}_t$ (for $t \geq 1$) are assumed to be mutually independent. Either the elements of the matrices \mathbf{Z}_t , \mathbf{T}_t , and \mathbf{Q}_t and the diagonal elements of the observation disturbance covariances $\sigma_{t,i}^2$ are assumed to be completely known, or some of them can be functions of a small set of unknown parameters (to be estimated from the data). Suppose that this unknown set of parameters is denoted by $\boldsymbol{\theta}$.

Although this description of the state space model might appear involved, it conveniently covers many variants of the SSMs encountered in practice and precisely describes the most general case that can be handled by the SSM procedure. An important restriction to note about the preceding description of the model formulation is that it assumes that the matrices \mathbf{X}_t that appear in the observation equation are free of unknown parameters and that the covariances of the observation disturbances $\boldsymbol{\epsilon}_t$ are *diagonal*. In most practical situations, the model under consideration can be easily reformulated to a statistically equivalent form that conforms to this restriction.

For easy reference, [Table 27.4](#) summarizes the information contained in the SSM equations.

Table 27.4 State Space Model: Notation

$\tau_1, \tau_2, \dots, \tau_n$	Distinct index values at which the observations are recorded
n	Number of distinct index instances
p_t	Number of observations recorded at index τ_t , $t = 1, 2, \dots, n$
q	Number of response variables in the model
$\mathbf{Y}_t = (y_{t,1}, y_{t,2}, \dots, y_{t,q \times p_t})$	Vertically stacked vector of response values recorded at τ_t
$N = q * \sum_{t=1}^n p_t$	Total number of response values in the data set
k	Number of predictor (regressor) variables in the observation equation
\mathbf{X}_t	$(q * p_t) \times k$ matrix of predictor values recorded at τ_t
$\boldsymbol{\beta}$	k -dimensional regression vector associated with the predictors
$\boldsymbol{\epsilon}_t \sim N(0, (\sigma_{t,1}^2, \dots))$	$(q * p_t)$ -dimensional observation disturbance vector with diagonal covariance
m	Dimension of the state vectors $\boldsymbol{\alpha}_t$
$\boldsymbol{\alpha}_t$	m -dimensional state vector
\mathbf{Z}_t	$(q * p_t) \times m$ matrix associated with $\boldsymbol{\alpha}_t$ in the observation equation
\mathbf{T}_t	$m \times m$ state transition matrix
$\boldsymbol{\eta}_t \sim N(0, \mathbf{Q}_t)$	m -dimensional state disturbance vector
d	Dimension of the diffuse vector $\boldsymbol{\delta}$ in the state initial condition
$\boldsymbol{\delta} \sim N(0, \kappa \Sigma), \kappa \rightarrow \infty$	Diffuse vector in the state initial condition
\mathbf{A}_1	$m \times d$ constant matrix associated with $\boldsymbol{\delta}$
$\boldsymbol{\eta}_1 \sim N(0, \mathbf{Q}_1)$	m -dimensional state disturbance vector in the initial condition
$\boldsymbol{\theta}$	Parameter vector

Types of Data Organization

The state space model specification in the SSM procedure requires proper understanding of both the data organization and the form of the model. The SSMs that are appropriate for time series data might not be appropriate for irregularly spaced longitudinal data. The SSM procedure distinguishes three types of data organization based on the way the observations are sequenced by the index variable. If an index variable is not specified, it is assumed that the observations are sequenced according to the observation number.

Regular: The observations are recorded at regularly spaced intervals; that is, $\tau_1, \tau_2, \dots, \tau_n$ are regularly spaced. Moreover, at each observation instance τ_i a single observation is recorded; that is, $p_t = 1$ for all t . The standard time series data (both univariate and multivariate) fall in this category.

Regular with Replication: The observations are recorded at regularly spaced intervals, but $p_t > 1$ for at least one t . Here the word replication is used loosely—it does not mean that the multiple observations at τ_t are replications in the precise statistical sense. The panel or cross-sectional data types fall into this category. In the panel data case with p cross-sections, $p_t = p$ for all t .

Irregular: The observations are not recorded at regular intervals, and the number of observations p_t at each index instance can be different. The longitudinal data fall into this category.

It is not always easy to decide whether the specified model is appropriate for the given data type. Whenever possible, the SSM procedure issues a note regarding the possible mismatch between the specified model and the data type being analyzed.

Overview of Model Specification Syntax

An SSM specification involves the description of the terms in the observation equation, the state transition equation, and the initial condition. For example, the response variables, the predictor variables, and the elements of the state transition matrix \mathbf{T}_t must somehow be specified. The SSM procedure syntax is designed so that little effort is needed to specify the more commonly needed models, while a highly flexible language is available for specifying more complex models. Two syntax features help achieve this goal: the ability to build a complex specification by combining simpler subspecifications, and a programming language for creating lists of variables to be used later in the model specification.

The SSM procedure statements can be divided into two classes:

- **programming statements**, which are used to create lists of variables that can be used for a variety of purposes (for example, as the elements of the model system matrices)
- statements specific to the SSM procedure that formulate the state space model and control its other aspects such as the input data specification and the resulting output

Since the matrices involved in the model specification can be specified as lists of variables, which you separately create by using the programming statements, you can finely control all aspects of the model specification. These programming statements permit the use of most DATA step language features such as the conditional logic (IF-THEN-ELSE), ARRAY type variables, and all the mathematical functions available in the DATA step. You can also use programming statements to define predictor variables on the fly.

Building a Complex Model Specification

In addition to being able to specify the system matrices in a flexible way, you can also build a complex model specification in a modular way by combining simpler subspecifications. Suppose that the state vector for the model to be specified is composed of subsections that are statistically independent, which is a common scenario in practical modeling situations. For example, suppose that $\boldsymbol{\alpha}_t$ can be divided into two disjoint subsections $\boldsymbol{\alpha}_t^a$ and $\boldsymbol{\alpha}_t^b$, which are statistically independent. This entails a corresponding block-diagonal structure to the system matrices \mathbf{T}_t and \mathbf{Q}_t that govern the state equations. In this case the term $\mathbf{Z}_t \boldsymbol{\alpha}_t$ that appears in the observation equation also splits into the sum $\mathbf{Z}_t^a \boldsymbol{\alpha}_t^a + \mathbf{Z}_t^b \boldsymbol{\alpha}_t^b$ for appropriately partitioned matrices \mathbf{Z}_t^a and \mathbf{Z}_t^b . The model specification syntax of the SSM procedure makes building an SSM from such smaller pieces easy. Throughout this chapter, the linear combinations of the state subsections (such as $\mathbf{Z}_t^a \boldsymbol{\alpha}_t^a$) that appear in the observation equation are called *components*. An SSM specification in the SSM procedure is created by combining separate component specifications. In general, you specify a component in two steps: first you define a state subsection $\boldsymbol{\alpha}_t^a$ and then you define a matching linear combination $\mathbf{Z}_t^a \boldsymbol{\alpha}_t^a$. For some special components, such as some commonly needed *trend* components, you can combine these two steps into one keyword specification.

The following list summarizes the (nonprogramming) SSM procedure syntax statements used for model specification:

- The **ID** statement specifies the index variable (τ). It is assumed that the data within each BY group are ordered (in ascending order) according to the ID variable. The SSM procedure automatically

creates a variable, `_ID_DELTA_`, which contains the difference between the successive ID values. This variable is available for use by the programming statements to define time-varying system matrices. For example, in the case of SSMs used for modeling the longitudinal data, the T_t and Q_t matrices often depend on `_ID_DELTA_` (see [Example 27.4](#)).

- The **PARMS** statement specifies variables that serve as the parameters of the model. That is, it partially defines the model parameter vector θ . Other elements of θ are implicitly defined if your specification of the system matrices is not fully complete.
- The **STATE** statement specifies a subsection of the model state vector. Multiple STATE statements can be used in the model specification; each one defines a statistically independent subsection of the model state vector. For full customization, T_t and Q_t blocks that govern this subsection can be specified as lists of variables created by programming statements. However, you can obtain many commonly needed state subsection types simply by using the TYPE= option in this statement. For example, the use of TYPE=SEASON(LENGTH=12) results in a state subsection that can be used to define a monthly seasonal component.
- The **COMPONENT** statement specifies a linear combination that matches a state subsection previously defined by using a STATE statement. Thus, a matching pair of STATE and COMPONENT statements define a component.
- The **TREND** statement is used for easy specification of some commonly needed trend components.
- The **IRREGULAR** statement specifies the observation disturbance for a particular response variable.
- The **MODEL** statement specifies the observation equation for one of the response variables. A separate MODEL statement is needed for each response variable in the multivariate case. The MODEL statement specifies an equation in which the left-hand side is the response variable and the right-hand side is a list that contains components and regression variables.

Model Specification Steps

To illustrate the model specification steps, suppose y is a response variable and variables x_1 and x_2 are predictors. The following statements specify a model for y that includes two components named `cycle` and `randomWalk`, predictors x_1 and x_2 , and an observation disturbance named `whiteNoise`:

```
parms lambda / lower=(1.e-6) upper=(3.14);
parms cycleVar / lower=(1.e-6);
array cycleT{4} c1-c4;
c1 = cos(lambda);
c2 = sin(lambda);
c3 = -c2;
c4 = c1;
state s_cycle(2) T(g)=(cycleT) cov(I)=(cycleVar) a1(2);
component cycle=(1 0)*s_cycle;
trend randomWalk(rw);
irregular whiteNoise;
model y = x1 x2 randomWalk cycle whiteNoise;
```


The specification begins with a PARMS statement that defines two parameters, `lambda` and `cycleVar`, along with their lower and upper bounds (essentially zero and π for `lambda`, and zero and infinity for `cycleVar`). Next, programming statements define an array of variables, `cycleT`, which contains four variables, `c1–c4`; these variables are used later for defining the elements of the transition matrix of a state subsection. The STATE statement specifies the two-dimensional subsection `s_cycle`; the dimension appears within the parentheses after the name (`s_cycle(2)`). The T= option specifies the transition matrix for the `s_cycle` (`T(g)=(cycleT)`); the `g` in `T(g)` signifies that the form of the T matrix is *general*. The COV= option (`cov(I)=(cycleVar)`) specifies the covariance of the state disturbance (\mathbf{Q}_t for $t \geq 2$); because of the use of `I` in `cov(I)`, the covariance is of the form scaled identity, essentially a two-dimensional diagonal matrix with both diagonal elements equal to `cycleVar`. The initial condition for `s_cycle` is completely diffuse since the A1= option, which specifies \mathbf{A}_1 , specifies that the dimension of the diffuse vector $\boldsymbol{\delta}$ is 2: `a1(2)`. In this case there is no need to specify the covariance \mathbf{Q}_1 in the initial condition. The COMPONENT statement specifies the component cycle. It specifies cycle as a dot product of two vectors—(1 0) and `s_cycle`, which merely selects the first element of `s_cycle`: `component cycle=(1 0)*s_cycle`. The TREND statement defines a component named `randomWalk`; its type is `rw`, which signifies random walk. The IRREGULAR statement defines an observation disturbance named `whiteNoise`. Both the `randomWalk` and `whiteNoise` specifications are only partially complete—for example, the disturbance variance of `whiteNoise` is not specified. These unspecified variances, `trendVar`, which corresponds to `randomWalk`, and `wnVar`, which corresponds to `whiteNoise`, are automatically included in the list of unknown parameters, $\boldsymbol{\theta}$, along with the parameters defined by the PARMS statements. Thus, the parameter vector for this model is $\boldsymbol{\theta} = (\text{lambda } \text{cycleVar } \text{trendVar } \text{wnVar})$. Finally, the model specification is completed by the MODEL statement, which specifies the components of the observation equation: the response variable `y`, the predictors `x1` and `x2`, the components `randomWalk` and `cycle`, and the irregular term `whiteNoise`.

The preceding statements result in an SSM with a three-dimensional state vector, which is the result of combining the two-dimensional state subsection, `s_cycle`, and a one-dimensional subsection underlying the trend, `randomWalk`. In this specification, the initial state is completely diffuse with \mathbf{Q}_1 a null matrix, and \mathbf{A}_1 equal to the three-dimensional identity. The other state system matrices \mathbf{T}_t and \mathbf{Q}_t are time-invariant:

$$\mathbf{T} = \begin{bmatrix} \cos(\text{lambda}) & \sin(\text{lambda}) & 0 \\ -\sin(\text{lambda}) & \cos(\text{lambda}) & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \mathbf{Q} = \begin{bmatrix} \text{cycleVar} & 0 & 0 \\ 0 & \text{cycleVar} & 0 \\ 0 & 0 & \text{trendVar} \end{bmatrix}$$

The observation equation is obvious with $\mathbf{Z} = [1 \ 0 \ 1]$.

Sparse Transition Matrix Specification

It often happens that the transition matrix \mathbf{T} (or \mathbf{T}_t in the time time-varying case) specified in a STATE statement is sparse—that is, many of its elements are zero. The algorithms in the SSM procedure exploit this sparsity for computational efficiency. In most cases the sparsity of a T-block can be inferred from the context. However, if the elements of the T-block are supplied by a list of variables in parentheses, it can be difficult to recognize elements that are structurally zero (this is because of the generality of the DATA step language used for defining the variables). In order to simplify the specification of such sparse transition matrix, SSM procedure has adopted a convention: the variables that correspond to structural zeros can (and should) be left *unset*—that is, these variables are declared, but no value is assigned to them. As an example, suppose that a three-dimensional state subsection has the following form of transition matrix for

some variables X1, X2, and X3 defined elsewhere in the program:

$$\mathbf{T} = \begin{bmatrix} X1 & 0 & 0 \\ X2 & X1 & 0 \\ X3 & 0 & X1 \end{bmatrix}$$

The following (incomplete) statements show how to specify such a T-block:

```
array tMat{3,3};
do i=1 to 3;
    tMat[i, i] = x1;
end;
tMat[2,1] = x2;
tMat[3,1] = x3;
state foo(3) T(g)=(tMat) ...;
```

In this specification only the nonzero elements of the tMat array, which contains $3 \times 3 = 9$ elements, are assigned a value. On the other hand, the following statements show an alternate way of specifying the same T-block. This specification explicitly sets the zeros in the T-block (the elements above the diagonal and tMat[3,2]) to zero.

```
array tMat{3,3};
do i=1 to 3;
    do j=1 to 3;
        if i=j then tMat[i, j] = x1;
        else if j > i then tMat[i, j] = 0;
    end;
end;
tMat[2,1] = x2;
tMat[3,1] = x3;
tMat[3,2] = 0;
state foo(3) T(g)=(tMat) ...;
```

The first specification is simpler, and is preferred. The second specification is mathematically equivalent (and generates the same output) but computationally less efficient since its sparsity structure cannot always be reliably inferred due to the generality of the DATA step language. In the first specification, the unset elements are recognized to be *structural* zeros while the set elements are treated as nonzero for sparsity purposes. See [Example 27.4](#) for a simple illustration. Proper sparsity specification can lead to significant computational savings for larger matrices.

Likelihood, Filtering, and Smoothing

The Kalman filter and smoother (KFS) algorithm is the main computational tool for using SSM for data analysis. This subsection briefly describes the basic quantities generated by this algorithm and their relationship to the output generated by the SSM procedure. For proper treatment of SSMs with a diffuse initial condition or when regression variables are present, a modified version of the traditional KFS, called *diffuse* Kalman filter and smoother (DKFS), is needed. A good discussion of the different variants of the traditional

and diffuse KFS can be found in Durbin and Koopman (2001). The DKFS implemented in the SSM procedure closely follows the treatment in de Jong and Chu-Chun-Lin (2003). Additional details can be found in these references.

The state space model equations (see the section “[The State Space Model and Notation](#)” on page 1786) imply that the combined response data vector $\mathbf{Y} = (\mathbf{Y}_1, \mathbf{Y}_2, \dots, \mathbf{Y}_n)$ has a Gaussian probability distribution. This probability distribution is *proper* if d , the dimension of the diffuse vector $\boldsymbol{\delta}$ in the initial condition, is zero and if k , the number of regression variables in the observation equation, is also zero (the regression parameter $\boldsymbol{\beta}$ is also treated as a diffuse vector). Otherwise, this probability distribution is *improper*. The KFS algorithm is a combination of two iterative phases: a forward pass through the data, called *filtering*, and a backward pass through the data, called *smoothing*, that uses the quantities generated during filtering. One of the advantages of using the SSM formulation to analyze the time series data is its ability to handle the missing values in the response variables. The KFS algorithm appropriately handles the missing values in \mathbf{Y} . For additional information about how PROC SSM handles missing values, see the section “[Missing Values](#)” on page 1804.

Filtering Pass

The filtering pass sequentially computes the following quantities for $t = 1, 2, \dots, n$ and $i = 1, 2, \dots, q * p_t$:

Table 27.5 KFS: Filtering Phase

$\hat{y}_{t,i} = E(y_{t,i} y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$	One-step-ahead prediction of the response values
$v_{t,i} = y_{t,i} - \hat{y}_{t,i}$	One-step-ahead prediction residuals
$F_{t,i} = \text{Var}(y_{t,i} y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$	Variance of the one-step-ahead prediction
$\hat{\boldsymbol{\alpha}}_{t,i} = E(\boldsymbol{\alpha}_t y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$	One-step-ahead prediction of the state vector
$\mathbf{P}_{t,i} = \text{Cov}(\boldsymbol{\alpha}_t y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$	Covariance of $\hat{\boldsymbol{\alpha}}_{t,i}$
$\mathbf{b}_{t,i}$	$(d + k)$ -dimensional vector
$\mathbf{S}_{t,i}$	$(d + k)$ -dimensional symmetric matrix
$(\hat{\boldsymbol{\delta}}_{\hat{\boldsymbol{\beta}}})_{t,i} = \mathbf{S}_{t,i}^{-1} \mathbf{b}_{t,i}$	Estimate of $\boldsymbol{\delta}$ and $\boldsymbol{\beta}$ using the data up to (t, i)
$\mathbf{S}_{t,i}^{-1}$	Covariance of $(\hat{\boldsymbol{\delta}}_{\hat{\boldsymbol{\beta}}})_{t,i}$

Here the notation $E(y_{t,i} | y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$ denotes the *conditional expectation* of $y_{t,i}$ given the history up to the index $(t, i - 1)$: $(y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$. Similarly $\text{Var}(y_{t,i} | y_{t,i-1}, \dots, y_{t,1}, \mathbf{Y}_{t-1}, \dots, \mathbf{Y}_1)$ denotes the corresponding conditional variance. $v_{t,i}$ is set to missing whenever $y_{t,i}$ is missing. In the diffuse case, the conditional expectations must be appropriately interpreted. The vector $\mathbf{b}_{t,i}$ and the matrix $\mathbf{S}_{t,i}$ contain some accumulated quantities that are needed for the estimation of $\boldsymbol{\delta}$ and $\boldsymbol{\beta}$. Of course, when $(d + k) = 0$ (the nondiffuse case), these quantities are not needed. In the diffuse case, as the matrix $\mathbf{S}_{t,i}$ is sequentially accumulated (starting at $t = 1, i = 1$), it might not be invertible until some $t = t_*, i = i_*$. The filtering process is called *initialized* after $t = t_*, i = i_*$. In some situations, this initialization might not happen even after the entire sample is processed—that is, the filtering process remains *uninitialized*. This can happen if the regression variables are collinear or if the data are not sufficient to estimate the initial condition $\boldsymbol{\delta}$ for some other reason.

The filtering process is used for a variety of purposes. One important use of filtering is to compute the likelihood of the data. In the model fitting phase, the unknown model parameters $\boldsymbol{\theta}$ are estimated by max-

imum likelihood. This requires repeated evaluation of the likelihood at different trial values of θ . After θ is estimated, it is treated as a known vector. The filtering process is used again with the fitted model in the forecasting phase, when the one-step-ahead forecasts and residuals based on the fitted model are provided. In addition, this filtering output is needed by the smoothing phase to produce the full-sample component estimates.

Likelihood Computation and Model Fitting Phase

In view of the Gaussian nature of the response vector, the likelihood of \mathbf{Y} , $\mathbf{L}(\mathbf{Y}, \theta)$, can be computed by using the *prediction-error decomposition*, which leads to the formula

$$-2 \log \mathbf{L}(\mathbf{Y}, \theta) = N_0 * \log 2\pi + \sum_{t=1}^n \sum_{i=1}^{q * p_t} \left(\log F_{t,i} + \frac{v_{t,i}^2}{F_{t,i}} \right) - \log(|\mathbf{S}_{n,p_n}^{-1}| - \mathbf{b}_{n,p_n}' \mathbf{S}_{n,p_n}^{-1} \mathbf{b}_{n,p_n})$$

where $N_0 = (N - k - d)$, $|\mathbf{S}_{n,p_n}^{-1}|$ denotes the determinant of \mathbf{S}_{n,p_n}^{-1} , and \mathbf{b}_{n,p_n}' denotes the transpose of the column vector \mathbf{b}_{n,p_n} . In the preceding formula, the terms associated with the missing response values $y_{t,i}$ are excluded and N denotes the total number of nonmissing response values in the sample. If \mathbf{S}_{n,p_n} is not invertible, then a generalized inverse is used in place of \mathbf{S}_{n,p_n}^{-1} , and $|\mathbf{S}_{n,p_n}^{-1}|$ is computed based on the nonzero eigenvalues of \mathbf{S}_{n,p_n} . Moreover, in this case $N_0 = N - \text{Rank}(\mathbf{S}_{n,p_n})$. When \mathbf{Y} has proper distribution (that is, when $(d + k) = 0$), the terms that involve \mathbf{S}_{n,p_n} and \mathbf{b}_{n,p_n} are absent and the preceding likelihood is proper. Otherwise, it is called the diffuse likelihood or the restricted likelihood.

When the model specification contains any unknown parameters θ , they are estimated by maximizing the preceding likelihood function. This is done by using a nonlinear optimization process that involves repeated evaluations of $\mathbf{L}(\mathbf{Y}, \theta)$ at different values of θ . The maximum likelihood (ML) estimate of θ is denoted by $\hat{\theta}$. When the restricted likelihood is used for computing $\hat{\theta}$, the estimate is called the restricted maximum likelihood (REML) estimate. Approximate standard errors of $\hat{\theta}$ are computed by taking the square root of the diagonal elements of its (approximate) covariance matrix. This covariance is computed as $-\mathbf{H}^{-1}$ where \mathbf{H} is the Hessian (the matrix of the second-order partials) of $\log \mathbf{L}(\mathbf{Y}, \theta)$, evaluated at the optimum $\hat{\theta}$.

Let $\dim(\theta)$ denote the dimension of the parameter vector θ . After the parameter estimation is completed, a table, called “Likelihood-Based Fit Statistics” is printed. It summarizes the likelihood calculations at $\hat{\theta}$. The first half of this table contains the information shown in Table 27.6.

Table 27.6 Likelihood Computation Summary

Statistic	Formula
Nonmissing response values used	N
Estimated parameters	$\dim(\theta)$
Initialized diffuse state elements	$\text{Rank}(\mathbf{S}_{n,p_n})$
Normalized residual sum of squares	$\sum_{t=1}^n \sum_{i=1}^{q * p_t} \left(\frac{v_{t,i}^2}{F_{t,i}} \right) - \mathbf{b}_{n,p_n}' \mathbf{S}_{n,p_n}^{-1} \mathbf{b}_{n,p_n}$
Full log likelihood	$\log \mathbf{L}(\mathbf{Y}, \hat{\theta})$

The second half of “Likelihood-Based Fit Statistics” table reports a variety of information-based criteria, which are functions of $-2 \log \mathbf{L}(\mathbf{Y}, \hat{\theta})$, N_0 , and $\dim(\theta)$. Table 27.7 summarizes the reported information criteria in smaller-is-better form:

Table 27.7 Information Criteria

Criterion	Formula	Reference
AIC	$-2 \log \mathbf{L} + 2 \dim(\theta)$	Akaike (1974)
AICC	$-2 \log \mathbf{L} + 2 \dim(\theta) N_0 / (N_0 - \dim(\theta) - 1)$	Hurvich and Tsai (1989) Burnham and Anderson (1998)
HQIC	$-2 \log \mathbf{L} + 2 \dim(\theta) \log \log(N_0)$	Hannan and Quinn (1979)
BIC	$-2 \log \mathbf{L} + \dim(\theta) \log(N_0)$	Schwarz (1978)
CAIC	$-2 \log \mathbf{L} + \dim(\theta)(\log(N_0) + 1)$	Bozdogan (1987)

Forecasting Phase

After the model fitting phase, the filtering process is repeated again to produce the model-based one-step-ahead response variable forecasts ($\hat{y}_{t,i}$), residuals ($v_{t,i}$), and their standard errors ($\sqrt{F_{t,i}}$). In addition, one-step-ahead forecasts of the components specified in the model statements, and any other user-defined linear combination of α_t , are also produced. These forecasts are set to missing until the index $t < t_*$ (that is, until the filtering process is initialized). If the filtering process remains uninitialized, then all the one-step-ahead forecast related quantities, (such as $\hat{y}_{t,i}$ and $v_{t,i}$) are reported as missing.

Smoothing Phase

After the filtering phase of KFS produces the one-step-ahead predictions of the response variables and the underlying state vectors, the smoothing phase of KFS produces the full-sample versions of these quantities—that is, rather than using the history up to $(t, i - 1)$, the entire sample \mathbf{Y} is used. The smoothing phase of KFS is a backward algorithm, which begins at $t = n$ and $i = q * p_n$ and goes back towards $t = 1$ and $i = 1$. It produces the following quantities:

Table 27.8 KFS: Smoothing Phase

$\tilde{y}_{t,i} = E(y_{t,i} \mathbf{Y})$	Interpolated response value
$\tilde{F}_{t,i} = \text{Var}(y_{t,i} \mathbf{Y})$	Variance of the interpolated response value
$\tilde{\alpha}_t = E(\alpha_t \mathbf{Y})$	Full-sample estimate of the state vector
$\tilde{\mathbf{P}}_t = \text{Cov}(\alpha_t \mathbf{Y})$	Covariance of $\tilde{\alpha}_t$
$\begin{pmatrix} \tilde{\delta} \\ \tilde{\beta} \end{pmatrix} = \mathbf{S}_{n,p_n}^{-1} \mathbf{b}_{n,p_n}$	Full-sample estimate of δ and β
\mathbf{S}_{n,p_n}^{-1}	Covariance of $\begin{pmatrix} \tilde{\delta} \\ \tilde{\beta} \end{pmatrix}$
$\text{AO}_{t,i} = y_{t,i} - E(y_{t,i} \mathbf{Y}^{t,i})$	Estimate of additive outlier
$g_{t,i}$	Variance of $\text{AO}_{t,i}$

Note that if $y_{t,i}$ is not missing, then $\tilde{y}_{t,i} = E(y_{t,i} | \mathbf{Y}) = y_{t,i}$ and $\tilde{F}_{t,i} = \text{Var}(y_{t,i} | \mathbf{Y}) = 0$ since, given \mathbf{Y} , $y_{t,i}$ is completely known. Therefore, $\tilde{y}_{t,i}$ provides nontrivial information only when $y_{t,i}$ is missing—in which case $\tilde{y}_{t,i}$ represents the best estimate of $y_{t,i}$ based on the available data. The full sample estimates of components specified in the model equations are based on the corresponding linear combinations of $\tilde{\alpha}_t$. Similarly, their standard errors are computed by using appropriate functions of $\tilde{\mathbf{P}}_t$. The estimate of additive outlier, $\text{AO}_{t,i} = y_{t,i} - E(y_{t,i} | \mathbf{Y}^{t,i})$, is the difference between the observed response value $y_{t,i}$ and its estimate using all the data except $y_{t,i}$, which is denoted by $\mathbf{Y}^{t,i}$. The estimate $\text{AO}_{t,i}$ is missing when $y_{t,i}$ is

missing. For more information about the computation of additive outliers, see de Jong and Penzer (1998).

If the filtering process remains uninitialized until the end of the sample (that is, if \mathbf{S}_{n,p_n} is not invertible), some linear combinations of $\boldsymbol{\delta}$ and $\boldsymbol{\beta}$ are not estimable. This, in turn, implies that some linear combinations of $\boldsymbol{\alpha}_t$ are also inestimable. These inestimable quantities are reported as missing. For more information about the estimability of the state effects see Selukar (2010).

Contrasting PROC SSM with Other SAS Procedures

The SSM procedure complements several SAS/ETS procedures and the MIXED procedure in SAS/STAT software (see Chapter 58, “The MIXED Procedure” (*SAS/STAT User’s Guide*)). The statistical models underlying all these procedures can be formulated as state space models; however, in many cases this formulation effort can be considerable. Generally speaking, when a problem can be formulated and satisfactorily solved either by using the SSM procedure or by using one of these other procedures, the other procedures are likely to be more efficient. However, in many instances, the SSM procedure can solve more general problems, or offer more detailed analysis, or both. Throughout this discussion, it is assumed that the problem being solved can be modeled as a linear statistical model. In particular, situations that require models such as autoregressive conditional heteroscedasticity (ARCH) models are not considered. The following list provides a more specific comparison of the SSM procedure with different procedures:

- All the SAS/ETS time series analysis procedures (the ARIMA, ESM, UCM, VARMAX, STATESPACE, and PANEL procedures) require time series data and are not applicable to the longitudinal data.
- For univariate time series analysis, the modeling facilities provided by the ARIMA, ESM, and UCM procedures are adequate in most cases. The SSM procedure can handle cases that do not fit neatly into one of these categories.
- For multivariate time series data analysis, you can use the VARMAX procedure for vector ARIMA modeling and the STATESPACE procedure for state space modeling. The capabilities of the SSM procedure are complementary to these procedures. In particular, the predefined multivariate structural models available in the SSM procedure cannot be specified by either of these procedures. In addition, you can formulate a much wider range of multivariate models—for example, models for series with different frequencies, by using the SSM procedure.
- When the \mathbf{R} side effects are not too complicated (for example, if \mathbf{R} is diagonal), the model considered by the MIXED procedure is a special case of the model considered by the SSM procedure. In the case of diagonal \mathbf{R} , it is easy to see that the state vector $\boldsymbol{\alpha}_t$ is equal to $\boldsymbol{\gamma}$, the MIXED random-effects vector, for all $t \geq 1$, that is, $\boldsymbol{\alpha}_t$ is *time invariant*. Therefore, the random-effects MIXED model is obtained by setting $\mathbf{T} = \text{Identity}$, $\mathbf{Q}_t = \mathbf{0}$, $t \geq 2$, $\mathbf{Q}_1 = \mathbf{G}$ (the MIXED \mathbf{G} matrix), and $\mathbf{A}_1 = \mathbf{0}$.
- For the analysis of cross-sectional data, you can use the PANEL procedure. In this case, the SSM procedure capabilities are complementary. It can provide alternate models, REML estimates, richer missing value support, and the estimates of the unobserved components (see [Example 27.1](#)).

Predefined Trend Models

The statistical models that govern the predefined trend components available in the SSM procedure are divided into two groups: models that are applicable to equally spaced data (possibly with replication), and the models that are applicable more generally (the irregular data type). Each trend component can be described as a dot product $\mathbf{Z}\alpha_t$ for some (time-invariant) vector \mathbf{Z} and a state vector α_t . The component specification is complete after the vector \mathbf{Z} is specified and the system matrices that govern the equations of α_t are specified. For trend models for regular data, all the system matrices are time-invariant. For irregular data, \mathbf{T}_t and \mathbf{Q}_t depend on the spacing between the distinct time points: $(\tau_{t+1} - \tau_t)$.

Trend Models for Regular Data

These models are applicable when the data type is either regular or regular-with-replication. A good reference for these models is Harvey (1989).

Random Walk Trend

This model provides a trend pattern in which the level of the curve changes slowly. The rapidity of this change is inversely proportional to the disturbance variance σ^2 that governs the underlying state. It can be described as $\mathbf{Z}\alpha_t$, where $\mathbf{Z} = (1)$ and the (one-dimensional) state α_t follows a random walk:

$$\alpha_{t+1} = \alpha_t + \eta_{t+1}, \quad \eta_t \sim N(0, \sigma^2)$$

Here $\mathbf{T} = 1$ and $\mathbf{Q} = \sigma^2$. The initial condition is fully diffuse.

Local Linear Trend

This model provides a trend pattern in which both the level and the slope of the curve vary slowly. This variation in the level and the slope is controlled by two parameters: σ_1^2 controls the level variation, and σ_2^2 controls the slope variation. If $\sigma_1^2 = 0$, the resulting trend is called an *integrated random walk*. Here $\mathbf{Z} = (1 \ 0)$, $\mathbf{T} = (1 \ 1, \ 0 \ 1)$, and $\mathbf{Q} = \text{Diag}(\sigma_1^2, \sigma_2^2)$. The initial condition is fully diffuse.

Damped Local Linear Trend

This trend pattern is similar to the local linear trend pattern. However, in the DLL trend the slope follows a first-order autoregressive model whereas in the LL trend the slope follows a random walk. The autoregressive parameter or the damping factor, ϕ , must lie between 0.0 and 1.0, which implies that the long-run forecast according to this pattern has a slope that tends to zero. Here $\mathbf{Z} = (1 \ 0)$, $\mathbf{T} = (1 \ 1, \ 0 \ \phi)$, and $\mathbf{Q} = \text{Diag}(\sigma_1^2, \sigma_2^2)$. The initial condition is partially diffuse with $\mathbf{Q}_1 = \text{Diag}(0, \sigma_2^2/(1 - \phi * \phi))$.

Trend Models for Irregular Data

A good reference for these models is de Jong and Mazzi (2001). Throughout this section $h_t = (\tau_{t+1} - \tau_t)$ denotes the difference between the successive time points. The system matrices \mathbf{T}_t and \mathbf{Q}_t that govern these models depend on h_t . However, whenever the notation is unambiguous, the subscript t is omitted.

Polynomial Spline Trend

This model is a general-purpose tool for extracting a smooth trend from the noisy data. The order of the spline governs the order of the local polynomial that defines the spline. In the SSM procedure the order is restricted to be an integer 1, 2, or 3; the default order is 1. The order 1 spline corresponds to a random walk, the order 2 spline corresponds to an integrated random walk, and the order 3 spline provides a locally quadratic trend. The dimension of the state underlying this component is the same as the order of the spline. The system matrices for the different orders are described below (in all the cases the initial condition is fully diffuse):

- order=1: $\mathbf{Z} = (1)$, $\mathbf{T} = (1)$, and $\mathbf{Q} = \sigma^2(h)$
- order=2: $\mathbf{Z} = (1 \ 0)$, $\mathbf{T} = (1 \ h, \ 0 \ 1)$, and $\mathbf{Q} = \sigma^2 \begin{pmatrix} \frac{h^3}{3} & \frac{h^2}{2} & \frac{h^2}{2} & h \end{pmatrix}$
- order=3: $\mathbf{Z} = (1 \ 0 \ 0)$, $\mathbf{T} = \begin{pmatrix} 1 & h & \frac{h^2}{2} & 0 & 1 & h & 0 & 0 & 1 \end{pmatrix}$, and

$$\mathbf{Q}[i, j] = \sigma^2 * \frac{h^{6-i-j+1}}{(6-i-j+1)(3-i)!(3-j)!} \quad 1 \leq i, j \leq 3$$

Decay and Growth Trends

There are two choices for the decay trend: DECAY and DECAY(OU). Similarly, there are two choices for the growth trend: GROWTH and GROWTH(OU). The “OU” stands for the Ornstein-Uhlenbeck form of these models. The decay trend is a sum of two correlated components: one component is a random walk, and the other component is a stationary autoregression. In its Ornstein-Uhlenbeck form, the random walk component is replaced by a constant. The growth trend (and its Ornstein-Uhlenbeck variant) has the same form as the decay trend except that the autoregression is nonstationary (in fact, it is explosive). Note that, in the case of the growth trend models, floating-point errors can result for even moderately long forecast horizons because of the explosive growth in the trend values.

The system matrices for the decay and the growth types in their respective cases are identical, except for the sign of the rate parameter ϕ : $\phi < 0.0$ for the decay type, and $\phi > 0.0$ for the growth type. In addition, the initial conditions for the growth models are fully diffuse; they are only partially diffuse for the decay models. The underlying state vector for all these models is two-dimensional.

The system matrices for the DECAY type are:

$$\begin{aligned} \mathbf{Z} &= (1 \ 1) \\ \mathbf{T} &= \text{Diag}(1, \exp(h\phi)) \\ \mathbf{Q} &= \frac{\sigma^2}{\phi^3} \begin{pmatrix} h\phi & 1 - \exp(h\phi) \\ 1 - \exp(h\phi) & (\exp(2h\phi) - 1)/2 \end{pmatrix} \end{aligned}$$

The initial condition is partially diffuse with $\mathbf{Q}_1 = \text{Diag}(0, \frac{-\sigma^2}{2\phi^3})$. The system matrices for the GROWTH type are the same (with $\phi > 0.0$), except that the initial condition is fully diffuse; so $\mathbf{Q}_1 = 0$.

For the DECAY(OU) type, \mathbf{Z} and \mathbf{T} are the same as DECAY, whereas

$$\mathbf{Q} = \text{Diag} \left(0, \sigma^2 \frac{(\exp(2h\phi) - 1)}{2\phi} \right) \quad \text{and} \quad \mathbf{Q}_1 = \text{Diag}(0, \frac{-\sigma^2}{2\phi})$$

The system matrices for the GROWTH(OU) type are the same (with $\phi > 0.0$), except that the initial condition is fully diffuse; so $\mathbf{Q}_1 = 0$.

Predefined Structural Models

A set of predefined models is available in the SSM procedure for models called structural models in the time series literature. These predefined models can be used to model trend, seasonal, and cyclical patterns in the univariate and multivariate time series. For the most part, the multivariate models are straightforward generalizations of the corresponding univariate models—for example, the multivariate random walk trend described later in this section generalizes the univariate random walk trend described in the section “[Random Walk Trend](#)” on page 1797. All of these models, with the exception of the continuous-time cycle model, are applicable only to the regular data type. The continuous-time cycle model is applicable to all the data types; however, it is available for the univariate case only.

To specify these models, you must first use the STATE statement with the correct **TYPE=** option. When you specify the **TYPE=** option, you do not need to specify other options of the STATE statement (for example, the **T** option, the **COV1** option, and the **A1** option). However, you must specify the **COV** option, which describes the covariance of the disturbance term that drives the state equation. Throughout this section, the symmetric matrix specified by using the **COV** option is denoted by Σ . For **TYPE=LL**, an additional matrix, specified by using the **SLOPECOV** suboption, also plays a role. It is denoted by Σ_{slope} . Subsequently you must specify one or more COMPONENT statements to define the (univariate) components based on this state subsection for their inclusion in the MODEL statement. These univariate components exhibit interesting behavior based on the structure of Σ (and Σ_{slope} , whenever applicable)—for example, imposing rank restrictions on Σ in the multivariate random walk results in these univariate trends moving together. For additional information about these models, see Harvey (1989).

The following example summarizes the steps needed to define a multivariate structural model by using a sequence of STATE and COMPONENT statements. For a full example, see the section “[Getting Started: SSM Procedure](#)” on page 1767. Suppose that a three-dimensional time series is being studied with response variables y_1 , y_2 , and y_3 . Suppose you want to specify the three-variate structural model

$$\mathbf{y}_t = \boldsymbol{\mu}_t + \boldsymbol{\psi}_t + \boldsymbol{\epsilon}_t$$

where $\mathbf{y}_t = (y_{1,t}, y_{2,t}, y_{3,t})$ denotes the response series, and $\boldsymbol{\mu}_t$, $\boldsymbol{\psi}_t$, and $\boldsymbol{\epsilon}_t$ denote the three-variate components, trend, cycle, and white noise, respectively. The three components of $\boldsymbol{\epsilon}_t$, the observation noise in the model, are not assumed to be independent. Therefore, you cannot specify them by using three **IRREGULAR** statements; you must include them in the state specification. The following (incomplete) statements show how to specify this model:

```
state whiteNoise(3) type=wn ...;
component wn1 = whiteNoise[1];
component wn2 = whiteNoise[2];
component wn3 = whiteNoise[3];

state randomWalk(3) type=rw ...;
component rw1 = randomWalk[1];
component rw2 = randomWalk[2];
```

```

component rw3 = randomWalk[3];

state cycleState(3) type=cycle ...;
component c1 = cycleState[1];
component c2 = cycleState[2];
component c3 = cycleState[3];

model y1 = rw1 c1 wn1;
model y2 = rw2 c2 wn2;
model y3 = rw3 c3 wn3;

```

The first STATE statement defines `whiteNoise`, a state subsection needed for defining a three-dimensional white noise component. In turn, `whiteNoise` is used to define the three univariate white noise components: `wn1`, `wn2`, and `wn3`. The components `wn1`, `wn2`, and `wn3` are correlated—their correlation structure is controlled by the covariance specification of `whiteNoise`. The second set of STATE and COMPONENT statements result in three correlated random walk trend components: `rw1`, `rw2`, and `rw3`. Finally, the last set of STATE and COMPONENT statements result in three correlated cycle components: `c1`, `c2`, and `c3`. In the end, the desired multivariate model is defined by including these (univariate) components in the appropriate MODEL statements.

In the preceding example, it is important to note the relationship between the dimension, denoted by *dim* throughout this section, specified in the STATE statement and the actual dimension of the resulting state subsection. Note that the three state subsections, `whiteNoise`, `randomWalk`, and `cycleState`, are defined by using the same *dim* specification: 3. However, the actual dimensions of these state subsections depend on their type; they do not need to equal this specified dimension. Here, `whiteNoise` and `randomWalk` do have the same size, 3, as the specified *dim*. However, the size of `cycleState`, which is of TYPE=CYCLE, is $2 * dim = 6$. Another important point to note: no matter what the underlying size of the state subsection, the desired univariate components were obtained by using an identical specification scheme in the COMPONENT statement. This happens because the component specification style based on the element operator—[]—in the COMPONENT statement behaves differently when the TYPE= option is used to define the state subsection (see the section “Multivariate Season” on page 1802 for an illustration).

The system matrices for all these models are time-invariant, with the exception of the continuous-time cycle model. In this section, α_t denotes the subsection of the overall model state α_t , and **T**, **Q**, and **A**₁ denote the corresponding blocks of the larger system matrices.

For the multivariate cycle system matrices described in the section “Multivariate Cycle” on page 1802, the Kronecker product notation is useful: if **A** is an $m \times n$ matrix and **B** is a $p \times q$ matrix, then the Kronecker product $\mathbf{A} \otimes \mathbf{B}$ is an $mp \times nq$ block matrix:

$$\mathbf{A} \otimes \mathbf{B} = \begin{bmatrix} a_{11}B & \cdots & a_{1n}B \\ \vdots & \ddots & \vdots \\ a_{m1}B & \cdots & a_{mn}B \end{bmatrix}$$

Multivariate White Noise

The STATE statement option TYPE=WN specifies white noise of dimension *dim*—that is, a sequence of zero mean, independent, Gaussian vectors with covariance Σ . The specification of the associated system

matrices is trivial: \mathbf{T} is zero, $\mathbf{Q} = \mathbf{\Sigma}$, and the initial condition is nondiffuse ($\mathbf{Q}_1 = \mathbf{\Sigma}$ and $\mathbf{A}_1 = 0$).

Multivariate white noise is needed to specify the observation equation noise term for the multivariate models for the time series data. Since the state space formulation for the SSM procedure requires the observation equation noise vector to have the diagonal form, you need to include the noise vector in the state. The noise term for the i th response variable is defined by a component that simply picks the i th element of this multivariate white noise. For example, the component `wn_i` defined as follows can be used as a noise term in the MODEL statement of the i th response variable:

```
state white(dim) type=wn ...;
component wn_i = white[i];
```

Multivariate Random Walk Trend

The STATE statement option `TYPE=RW` specifies a dim -dimensional random walk

$$\alpha_{t+1} = \alpha_t + \eta_{t+1}$$

where η_t is a sequence of zero mean, independent, Gaussian vectors with covariance $\mathbf{\Sigma}$. The specification of the associated system matrices is trivial: \mathbf{T} is a dim -dimensional identity matrix, \mathbf{I}_{dim} , $\mathbf{Q} = \mathbf{\Sigma}$, and the initial condition is fully diffuse ($\mathbf{Q}_1 = 0$ and $\mathbf{A}_1 = \mathbf{I}_{dim}$).

The multivariate random walk is a useful trend model for multivariate time series data. The trend term for the i th response variable is defined by a component that simply picks the i th ($1 \leq i \leq dim$) element of α_t . For example, the component `rw_i` defined as follows can be used as a trend term in the MODEL statement of the i th response variable:

```
state randomWalk(dim) type=rw ...;
component rw_i = randomWalk[i];
```

Multivariate Local Linear Trend

The STATE statement option `TYPE=LL` specifies a $(2*dim)$ -dimensional α_t , needed for defining a dim -dimensional local linear trend. The first dim elements of α_t correspond to the needed multivariate trend, and the subsequent dim elements are needed to capture the slope vector of this trend. α_t can be defined as

$$\alpha_{t+1} = \mathbf{T}\alpha_t + \eta_{t+1}$$

where η_t is a sequence of zero mean, independent, Gaussian vectors with covariance $\text{Diag}(\mathbf{\Sigma}, \mathbf{\Sigma}_{slope})$ and \mathbf{T} is a $2*dim$ -dimensional block matrix $\mathbf{T} = (\mathbf{I}_{dim} \mathbf{I}_{dim}, \mathbf{0} \mathbf{I}_{dim})$. The initial condition is fully diffuse ($\mathbf{Q}_1 = 0$ and $\mathbf{A}_1 = \mathbf{I}_{2*dim}$). This is a multivariate generalization of the univariate local linear trend.

The multivariate local linear trend is a useful trend model for multivariate time series data. The trend term for the i th response variable is defined by a component that simply picks the i th element ($1 \leq i \leq dim$) of α_t . For example, the component `ll_i` defined as follows can be used as a trend term in the MODEL statement of the i th response variable:

```
state localLin(dim) type=ll(slopecov..) ...;
component ll_i = localLin[i];
```

Multivariate Cycle

The STATE statement option **TYPE=CYCLE** specifies a $(2*dim)$ -dimensional α_t , needed for defining a dim -dimensional cycle. As in the LL case, the first dim elements of α_t correspond to the needed dim -dimensional cycle, and the remaining dim elements contain some auxiliary quantities. The cycle model defined in this subsection requires a regular data type—that is, the CT option is not included. Let ρ denote the damping factor, and $\lambda = 2\pi/period$ be the frequency associated with the cycle. The admissible parameter ranges are $0 < \rho \leq 1$ and $period > 2$, which implies that $0 < \lambda < \pi$. Let $\mathbf{C} = \rho(\cos(\lambda) \sin(\lambda), -\sin(\lambda) \cos(\lambda))$, a 2×2 matrix, and let $\mathbf{T} = \mathbf{C} \otimes \mathbf{I}_{dim}$, a $2*dim \times 2*dim$ matrix. With this notation, the transition equation associated with α_t is

$$\alpha_{t+1} = \mathbf{T}\alpha_t + \eta_{t+1}$$

where η_t is a sequence of zero mean, independent, $(2*dim)$ -dimensional Gaussian vectors with covariance $\text{Diag}(\Sigma, \Sigma)$. If $\rho = 1$, the initial condition is fully diffuse ($\mathbf{Q}_1 = 0$ and $\mathbf{A}_1 = \mathbf{I}_{2*dim}$). Otherwise, it is nondiffuse: $\mathbf{Q}_1 = \frac{1}{(1-\rho^2)}\text{Diag}(\Sigma, \Sigma)$ and $\mathbf{A}_1 = 0$.

The multivariate cycle is useful for capturing periodic behavior for multivariate time series data. The cycle term for the i th response variable is defined by a component that simply picks the i th element of α_t . For example, the component `cycle_i` defined as follows can be used as a cycle term in the MODEL statement of the i th response variable:

```
state cycleState(dim) type=cycle ...;
component cycle_i = cycleState[i];
```

Multivariate Season

The STATE statement option **TYPE=SEASON(LENGTH=s)** specifies a $((s-1)*dim)$ -dimensional α_t , needed for defining a dim -dimensional trigonometric season component with season length s . A (multivariate) trigonometric season component, γ , is a sum of (multivariate) cycles of different frequencies,

$$\gamma = \sum_{j=1}^{[s/2]} \gamma_j$$

where the constituent cycles γ_j , called harmonics, have frequencies $\lambda_j = 2\pi j/s$. All the harmonics are assumed to be statistically independent, have the same damping factor $\rho = 1$, and are governed by the disturbances with the same covariance matrix Σ . The number of harmonics, $[s/2]$, equals $s/2$ if s is even and $(s-1)/2$ if it is odd. This means that specifying **TYPE=SEASON(LENGTH=s)** is equivalent to specifying $[s/2]$ cycle specifications with correct frequencies, damping factor $\rho = 1$, and the COV option restricted to the same covariance Σ . The resulting α_t is necessarily $((s-1)*dim)$ -dimensional. When the season length s is even, the last harmonic cycle, $\gamma_{s/2}$, has frequency π and requires special attention. It is of dimension dim rather than $2*dim$ because its underlying state equation simplifies to a dim -variate autoregression with autoregression coefficient $-\mathbf{I}_{dim}$. As a result of this discussion, it is clear that the system matrices \mathbf{T} and \mathbf{Q} associated with the $((s-1)*dim)$ -dimensional α_t are block-diagonal with the blocks corresponding to the harmonics. The initial condition is fully diffuse.

For all the models discussed so far, the first dim elements of α_t provided the needed (multivariate) component. This is not the case for the (multivariate) season component. Extracting the i th seasonal component

from α_t requires accumulating the contributions from the $[s/2]$ harmonics associated with this i th seasonal, which are not organized contiguously in α_t . For example, suppose that dim is 2 and the season length s is 4. In this case $[s/2]$ is 2, and the bivariate seasonal component is a sum of two independent bivariate cycles, γ_1 and γ_2 . The cycle γ_1 has frequency $\pi/2$ and its underlying state, say α_t^a , has dimension $2 * dim = 4$. The last harmonic, γ_2 , has frequency π , and therefore its underlying state, say α_t^b , has dimension 2. The combined state $\alpha_t = (\alpha_t^a, \alpha_t^b)$ has dimension $6 = 4 + 2$. In order to extract the first bivariate seasonal component, you must extract the first components of bivariate cycles γ_1 and γ_2 , which in turn implies the first elements of α_t^a and α_t^b , respectively. Thus, obtaining the first bivariate seasonal component requires extracting the first and the fifth elements of the combined state α_t . Similarly, obtaining the second bivariate seasonal component requires extracting the second and the sixth elements of the combined state α_t . All this can be summarized by the dot product expressions

$$\begin{aligned}s_{1t} &= (1 \ 0 \ 0 \ 0 \ 1 \ 0) \alpha_t \\ s_{2t} &= (0 \ 1 \ 0 \ 0 \ 0 \ 1) \alpha_t\end{aligned}$$

where s_{1t} and s_{2t} denote the first and second components, respectively, of the bivariate seasonal component. Note that s_{1t} and s_{2t} are univariate seasonal components, each of season length 4, in their own right. They are correlated components; their correlation structure depends on Σ .

Obtaining the desired components of the multivariate seasonal component is made easy by a special syntax convention of the COMPONENT statement. Continuing with the previous example, the following examples illustrate two equivalent ways of obtaining s_{1t} and s_{2t} . The first set of statements explicitly specify the linear combinations needed for defining s_{1t} and s_{2t} :

```
state seasonState(2) type=season(length=4) ...;
component s_1=( 1  0  0  0  1  0 ) * seasonState;
component s_2=( 0  1  0  0  0  1 ) * seasonState;
```

The following simpler specification achieves the same result:

```
state seasonState(2) type=season(length=4) ...;
component s_1 = seasonState[1];
component s_2 = seasonState[2];
```

In the latter specification, the meaning of the element operator $[]$ changes if the state in question is defined by using the **TYPE=** option.

Continuous-Time Cycle

The STATE statement option **TYPE=CYCLE(CT)** specifies a two-dimensional α_t , needed for defining a univariate continuous time cycle. In this case the dimension, dim , used in the STATE statement must be 1. In particular, Σ becomes one-dimensional, which is denoted by σ^2 . This cycle can be used for any data type. As before, the parameters of the cycle are a damping factor ρ , $0 < \rho \leq 1$, and $period > 0$. Unlike in the discrete-time cycle described in the section “**Multivariate Cycle**” on page 1802, the *period* is not required to be larger than 2. Let $\lambda = 2\pi/period$ and let $h_t = (\tau_{t+1} - \tau_t)$ denote the difference between successive

time points. In this case, the system matrices **T** and **Q** that govern α_t depend on h_t . They are:

$$\begin{aligned}\mathbf{T} &= \rho^h (\cos(\lambda h) \sin(\lambda h), -\sin(\lambda h) \cos(\lambda h)) \\ \mathbf{Q} &= \frac{\sigma^2(1 - \rho^{2h})}{-2 \ln(\rho)} * \mathbf{I}_2 \quad \text{if } \rho < 1 \\ \mathbf{Q} &= \sigma^2 h \mathbf{I}_2 \quad \text{if } \rho = 1\end{aligned}$$

If $\rho < 1$, the initial condition is nondiffuse: $\mathbf{Q}_1 = \frac{\sigma^2}{-2 \ln(\rho)} \mathbf{I}_2$. For $\rho = 1$, the initial condition is fully diffuse.

The first element of α_t corresponds to the needed cycle, and the second element is an auxiliary quantity. You can define a cycle term based on this state as follows:

```
state cycleState(1) type=cycle(CT) ...;
component cycle = cycleState[1];
```

Note that the CT option must be included in the use of **TYPE=CYCLE**.

Covariance Parameterization

The covariance matrices specified by the **COV** and **COV1** options in the STATE statement must be positive semidefinite. When these matrices are of general form and are not user-specified, they are internally parameterized by their Cholesky root. Suppose that Σ , an $m \times m$ positive semidefinite matrix of rank r , is such a covariance matrix. Then, Σ can always be written as

$$\Sigma = RR'$$

where the (generalized) Cholesky root, R , is an $m \times r$ lower triangular matrix with nonnegative diagonal elements (that is, $R[i, j] = 0$ if $j > i$ and $R[i, i] \geq 0$, $1 \leq i \leq r$). The SSM procedure parameterizes Σ by the elements of its Cholesky root, which adds $r * (r + 1)/2 + r * (m - r)$ elements to the parameter vector θ .

Missing Values

For a variety of reasons the data might contain missing response and predictor values. Before starting the analysis of a particular BY group, SSM procedure makes an internal copy of the data. The actual analysis is done by using this copy. The data in the copy are first examined for missing values in the response, predictor, and the ID variables. No missing values are permitted in the ID variable (if it is specified). If all the missing values are associated with only the response variables, then the internal copy of the data is not altered. However, if any of the predictors are found to contain missing values, the internal copy of the data is altered as follows: any missing predictor value is replaced by zero, and the response values that are dependent on that predictor in the corresponding row are set to missing. These missing response values are called the *induced missing values*. The reported analysis is based on the (possibly altered) internal copy of the BY group.

Computational Issues

A Well-Behaved Model

The model defined by the state space model equations (see the section “[The State Space Model and Notation](#)” on page 1786) is very general. This generality is quite useful since it encompasses a wide variety of data generation processes. On the other hand, it also makes it easy to specify overly complex and numerically unstable models. If a suitable model is not already known and you are in the early phases of modeling, it is important to start with models that are relatively simple and well-behaved from the numerical standpoint. From the numerical and statistical considerations, two aspects of model formulation are particularly important: identifiability and numerical stability. A model is identifiable if the observed data has a distinct probability distribution for each admissible parameter vector. Unless proper care is taken, it is easy to specify an unidentifiable state space model. Similarly, predictions according to some types of state space models can display explosive growth or wild oscillations. This behavior is primarily governed by the transition matrix \mathbf{T} (or \mathbf{T}_t in the time-varying case). Unidentifiable models can run into difficulties during parameter estimation, and explosive growth (and wild oscillation) causes numerical problems associated with finite-precision arithmetic. Unfortunately, no simple identifiability check is available for a general state space model, and it is difficult to decide at the outset whether a specified model might suffer from numerical instability. See Harvey (1989, chap. 4, sec. 4) for a discussion of identifiability issues, and see Harvey (1989, chap. 3, sec. 3) for a discussion of the stability properties of time-invariant state space models. The following guidelines are likely to result in models that are identifiable and numerically stable:

- Build models by composing submodels that are known to be well-behaved. The predefined models provided by the SSM procedure are good submodel candidates (see the sections “[Predefined Trend Models](#)” on page 1797 and “[Predefined Structural Models](#)” on page 1799).
- Pay careful attention to the way the variety of system matrices are defined. The behavior of their elements, as functions of model parameters and other variables, must be well-understood. If these elements are defined by using the DATA steps, you can validate their behavior by running these DATA steps outside of the SSM procedure. In particular, note the following:
 - The transition matrix \mathbf{T} (or \mathbf{T}_t in the time-varying case) determines the explosiveness characteristics of the model; it must be well-behaved for all parameters.
 - The disturbance covariances \mathbf{Q}_t must be positive semidefinite for all parameters.
 - If the transition matrix \mathbf{T}_t or the disturbance covariance \mathbf{Q}_t are time-varying and the data contain replicate observations (observations with the same ID value), check that the elements of \mathbf{T}_t and \mathbf{Q}_t do not vary during replicate observations. This follows from the fact that the underlying state does not vary during replications (see the state equation in the section “[The State Space Model and Notation](#)” on page 1786 and the section “[Types of Data Organization](#)” on page 1788).

Convergence Problems

As explained in the section “[Likelihood Computation and Model Fitting Phase](#)” on page 1794, the model parameters are estimated by nonlinear optimization of the likelihood. This process is not guaranteed to succeed. For some data sets, the optimization algorithm can fail to converge. Nonconvergence can result

from a number of causes, including flat or ridged likelihood surfaces and ill-conditioned data. It is also possible for the algorithm to converge to a point that is not the global optimum of the likelihood.

If you experience convergence problems, consider the following:

- Data that are extremely large or extremely small can adversely affect results because of the internal tolerances used during the filtering steps of the likelihood calculation. Rescaling the data can improve stability.
- Examine your model for redundancies in the included components and regressors. The components or regressors that are nearly collinear to each other can cause the optimization process to become unstable.
- Lack of convergence can indicate model misspecification or a violation of the normality assumption.

Computer Resource Requirements

The computing resources required for the SSM procedure depend on several factors. The memory requirement for the procedure is largely dependent on the number of observations to be processed and the size of the state vector underlying the specified model. If n denotes the sample size and m denotes the size of the state vector, the memory requirement for the smoothing phase of the Kalman filter is of the order of $6 \times 8 \times n \times m^2$ bytes, ignoring the lower-order terms. If the smoothed component estimates are not needed, then the memory requirement is of the order of $6 \times 8 \times (m^2 + n)$ bytes. Besides m and n , the computing time for the parameter estimation depends on the size of the parameter vector θ and how many likelihood evaluations are needed to reach the optimum.

Displayed Output

The default printed output produced by the SSM procedure contains the following information:

- brief information about the input data set, including the data set name and label
- summary statistics for the response variables in the model, including the names of the variables, the total number of observations and the number of missing observations, the smallest and largest measurements, and the mean and standard deviation
- information about the index variable, including the index value of the first and the last observation, maximum difference between the successive index values, and the categorization of the data into regular, regular-with-replication, or irregular types
- estimates of the regression parameters if the model contains any predictors, including their standard errors, t statistics, and p -values
- convergence status of the likelihood optimization process if any parameters are estimated
- estimates of the free parameters at the end of the model fitting phase, including the parameter estimates and their approximate standard errors

- the likelihood-based goodness-of-fit statistics, including the full likelihood, the sum of squares of residuals normalized by their standard errors, and the information criteria: AIC, AICC, HQIC, BIC, and CAIC

ODS Table Names

The SSM procedure assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in [Table 27.9](#).

Table 27.9 ODS Tables Produced by PROC SSM

ODS Table Name	Description	Statement	Option
Tables That Summarize the Model Information			
ModelSummary	Summary information about the underlying state space model		Default
IdInformation	Summary information about the ID variable	ID	Default
ResponseInfo	Summary information about the response variables	MODEL	Default
Tables Related to Model Parameters and the Likelihood			
ConvergenceStatus	Convergence status of the estimation process		Default
RegressionEstimates	Estimates of the regression parameters		Default
FixedStateEstimates	Estimates of the time-invariant deterministic state elements		Default
ParameterEstimates	Estimates of the parameters specified by the PARMS statement	PARMS	Default
ParameterEstimates1	Estimates of the unknown elements in the model system matrices		Default
ErrorCov	Covariance estimate after multiplying the Cholesky roots		Default
FitSummary	Summary of the likelihood-based-fit-statistics		Default

OUT= Data Set

You can use the OUT= option in the FORECAST statement to store the series and component forecasts produced by the procedure. Which columns are included in the data set depends on the model specification. The model can have one or more response variables, a variety of components that appear in the MODEL statement, and components specified by the EVAL statement. The OUT= data set contains the one-step-ahead and full-sample estimates of the response variables, and all these components.

The following list describes the columns of the data set:

- the BY variables
- the ID variable, if specified by the ID statement
- Obs, a variable that contains the observation number
- the response series (more than one in the multivariate case)
- the following columns associated with the response series (the wildcard * is substituted by the name of one of the response variables):
 - FORECAST_* contains the one-step-ahead predicted values and the multistep forecasts of the response series
 - RESIDUAL_* contains the difference between the actual and forecast values
 - StdErr_* contains the standard error of prediction
 - Lower_* and Upper_* contain the lower and upper forecast confidence limits
 - Smoothed_* contains the smoothed values of the response variable
 - StdErr_Smoothed_* contains standard errors of the smoothed values of the response variable
 - AO_* contains the additive outlier estimate
 - StdErr_AO_* contains the standard error of the additive outlier estimate
- the following columns associated with the components (the wildcard * is substituted by the name of one of the components):
 - FORECAST_* contains the one-step-ahead predicted values and the multistep forecasts of the component
 - StdErr_* contains the standard error of prediction
 - Smoothed_* contains the smoothed values of the component
 - StdErr_Smoothed_* contains standard errors of the smoothed values of the component
 - Smoothed_Lower_* and Smoothed_Upper_* contain the lower and upper confidence limits of the smoothed component

Confidence limits are not produced for the smoothed series values or for the component forecasts; they are produced for the smoothed components.

Examples: SSM Procedure

Example 27.1: Panel Data: Two-Way Random-Effects Model

This example shows how you can use the SSM procedure to fit a two-way random-effects model to the panel data. Suppose $\mathbf{y} = (y_1, \dots, y_q)$ denotes a q -dimensional response vector that is associated with a cross-sectional study with q cross sections. The study data set contains \mathbf{y} measurements recorded at regular time intervals and might also contain predictor information. Here, unlike the multivariate time series setting, the \mathbf{y} values are stored in a single variable, and a separate variable called the cross-sectional variable indicates the membership of the observation to a particular cross section. Thus, for each time index t , the information in \mathbf{y}_t takes up q rows in the data set. The two-way random-effect model can be described as follows:

$$\mathbf{y}_t = \mathbf{X}_t \boldsymbol{\beta} + \boldsymbol{\gamma} + \xi_t \mathbf{1} + \boldsymbol{\epsilon}_t$$

Here the $(q \times k)$ matrix \mathbf{X}_t contains the regression variables that are associated with the k -dimensional regression vector $\boldsymbol{\beta}$, $\boldsymbol{\gamma}$ is a q -dimensional latent vector, ξ_t is a one-dimensional latent effect, $\mathbf{1}$ is a q -dimensional vector with all of its entries equal to one, and $\boldsymbol{\epsilon}_t$ is a q -dimensional latent vector. $\boldsymbol{\gamma}$ is called the cross-sectional effect, ξ_t is called the *time* effect, and $\boldsymbol{\epsilon}_t$ is called the observation noise. All these latent effects are assumed to be statistically independent. In addition, it is assumed that $\boldsymbol{\gamma}$ is a zero mean, Gaussian vector with scaled identity, $\sigma_c^2 \mathbf{I}_q$, as a covariance, ξ_t is a white noise sequence with variance σ_a^2 , and the observation noise $\boldsymbol{\epsilon}_t$ is a q -variate white noise sequence with covariance $\sigma_e^2 \mathbf{I}_q$. This model can be easily formulated as an SSM that can be analyzed by using the SSM procedure as follows:

- Since the random latent vector $\boldsymbol{\gamma}$ is time-invariant, it can be specified as a state subsection with an identity as the transition matrix and zero as the state disturbance vector. Its initial condition is nondiffuse with $\mathbf{Q}_1 = \sigma_c^2 \mathbf{I}_q$, a scaled identity.
- Since ξ_t affects all elements of \mathbf{y}_t , it must be included in the state. It can be modeled as a one-dimensional white noise state subsection.
- $\boldsymbol{\epsilon}_t$ can be modeled as observation noise, since its covariance is diagonal.

The Christenson Associates airline data, a frequently cited data set (Greene 2000), are used in this illustration. The data measure costs, prices of inputs, and utilization rates for six airlines over the time span 1970–1984. This is a cross-sectional data set with six cross sections that correspond to the six airlines; firmNumber is the cross-sectional variable and lC, the log-transformed costs, is the response variable. The following DATA step generates the data set:

```
data airline;
  input timePeriod firmNumber lC lQ lPF LF;
  label timePeriod = "Time period";
  label firmNumber = "Firm Number";
  label LF = "Load Factor (utilization index)";
  label lC = "Log transformed Costs";
  label lQ = "Log transformed Quantity";
  label lPF= "Log transformed Price of Fuel";
```

```

    year = intnx( 'year', '1jan1970'd, timePeriod-1 );
    format year year.;
datalines;
1    1    13.9471    -0.04839    11.5773    0.53449
1    2    13.2521    -0.65270    11.5502    0.49085
1    3    12.5648    -1.33781    11.6851    0.52433
1    4    11.8856    -2.44888    11.6526    0.43207

... more lines ...

```

As needed, these data are already ordered by the time index, year. For each year, there are six rows of observations—one row per airline. The following statements specify and fit a two-way random effects model to IC , the log-transformed costs. An intercept term, IQ , IPF , and LF are included as regressors.

```

proc SSM data=airline;
  id year interval=year;
  parms s2c/ lower=(1.e-6);
  array firmArray{6} f1-f6;
  do j=1 to 6;
    firmArray[j] = (firmNumber=j);
  end;
  intercept = 1.0;
  state panel_state(6) T(I) cov1(I)=(s2c);
  component panel = panel_state * (firmArray);
  state t_noise(1) type=wn cov(D);
  component teffect = t_noise[1];
  irregular wn ;
  model lC = intercept lQ lPF LF panel teffect wn;
  eval trendPlusReg = intercept + lQ + lPF + LF +
    panel + teffect;
  forecast out=for;
run;

```

The ID statement specifies year as an ID variable with yearly frequency. The PARMS statement defines $s2c$, a parameter that is restricted to be positive. $s2c$ is used later as the variance parameter for the panel effect. An array, firmArray , is defined, which is used later to pick the correct element of $\boldsymbol{\gamma}$ in a COMPONENT statement. A constant column, intercept , is defined to be used later as an intercept term. The state subsection panel_state corresponds to $\boldsymbol{\gamma}$, and the component panel extracts the proper element of $\boldsymbol{\gamma}$ by using firmArray . The component teffect corresponds to ξ_t , and wn specifies the observation noise ϵ_t . Finally the MODEL statement defines the model. A state linear combination, rendPlusReg , defined by the EVAL statement, is a sum of all effects in the model except the observation noise. An output data set, for , is specified to output all the estimated components. Some of the tables produced by running these statements are shown in [Output 27.1.1](#) through [Output 27.1.6](#).

The model summary, shown in [Output 27.1.1](#), shows that the model is defined by one MODEL statement, the dimension of the underlying state vector is 7 (since $\boldsymbol{\gamma}$ is six-dimensional and ξ_t is one-dimensional), the diffuse dimension is 4 (because of the four predictors in the model), and there are three parameters to be estimated.

Output 27.1.1 Model Summary Information

The SSM Procedure	
Model Summary	
Model Property	Value
Number of Model Equations	1
State Dimension	7
Dimension of the Diffuse Initial Condition	4
Number of Parameters	3

Output 27.1.2 provides information about the ID variable. It shows that there are multiple measurements—replications—at at least one time point. In this example you know that there are exactly six measurements at each time point.

Output 27.1.2 ID Variable Information

ID Variable Information				
Name	Start	End	MaxDelta	Type
year	1970	1984	1.00	Regular with replication

The **Output 27.1.3** provides likelihood information about the fitted model. See [Table 27.6](#) and [Table 27.7](#) for information about how to interpret this table.

Output 27.1.3 Likelihood Based Fit Statistics

Likelihood Based Fit Statistics	
Statistic	Value
Non-Missing Response Values Used	90
Estimated Parameters	3
Initialized Diffuse State Elements	4
Normalized Residual Sum of Squares	86
Full Log Likelihood	109.15
AIC (smaller is better)	-212.3
BIC (smaller is better)	-204.9
AICC (smaller is better)	-212
HQIC (smaller is better)	-209.3
CAIC (smaller is better)	-201.9

Output 27.1.4 shows the regression estimates.

Output 27.1.4 Regression Estimates

Estimates of the Regression Parameters					
Response Variable	Regression Variable	Estimate	Approx Std Error	t Value	Approx Pr > t
1C	intercept	9.36918	0.24003	39.03	<.0001
1C	1Q	0.86746	0.02510	34.56	<.0001
1C	1PF	0.43596	0.01700	25.64	<.0001
1C	1F	-0.98529	0.22369	-4.40	<.0001

The ML estimate of $s2c$, a parameter specified by the PARMS statement, is shown in [Output 27.1.5](#). It corresponds to σ_c^2 , the panel effect variance.

Output 27.1.5 Estimates of the Named Parameters

Maximum Likelihood Estimates of the Parameters Specified in the PARMS Statement			
Parameter	Estimate	Approx Std Error	
s2c	0.01516	0.0097921	

The estimates of the other unknown parameters in the model are shown in [Output 27.1.6](#). It shows the estimate of the variance of the irregular component wn , and the estimate of the variance of the time effect ξ_t .

Output 27.1.6 Estimates of the Unnamed Parameters

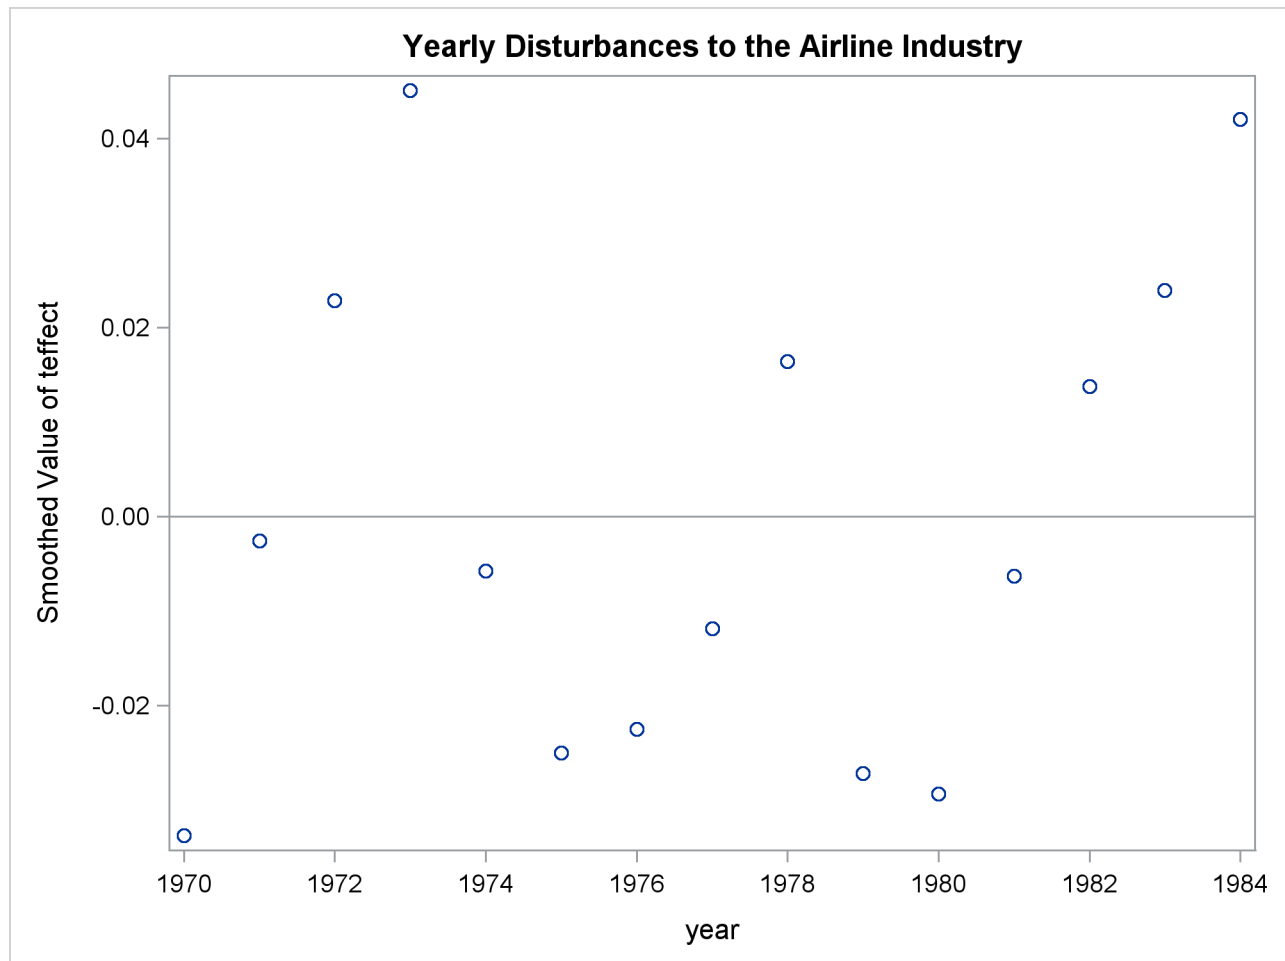
Maximum Likelihood Estimates of the Unknown System Parameters (Parameters Not Specified in the PARMS Statement)				
Component	Type	Parameter	Estimate	Approx Std Error
t_noise	Disturbance Covariance	Cov[1, 1]	0.00107	0.0006450
wn	Irregular	Variance	0.00274	0.0004721

Very often the main goal of a panel study is to estimate the regression effects, having taken into account the panel-specific intercepts (γ). However, you might also be interested in other issues. For example, the scatter plot in [Output 27.1.7](#) shows the smoothed estimates of ξ_t between 1970 and 1984, which can be thought of as shocks to the overall airline industry during this span. This plot is produced by using `smoothed_teffect`, the smoothed estimate of the `teffect` component in the model.

```
proc sgplot data=for;
  title "Yearly Disturbances to the Airline Industry";
  scatter x=year y=smoothed_teffect;
```

```
refline 0;
run;
```

Output 27.1.7 Scatter Plot of Smoothed Estimates of ξ_t



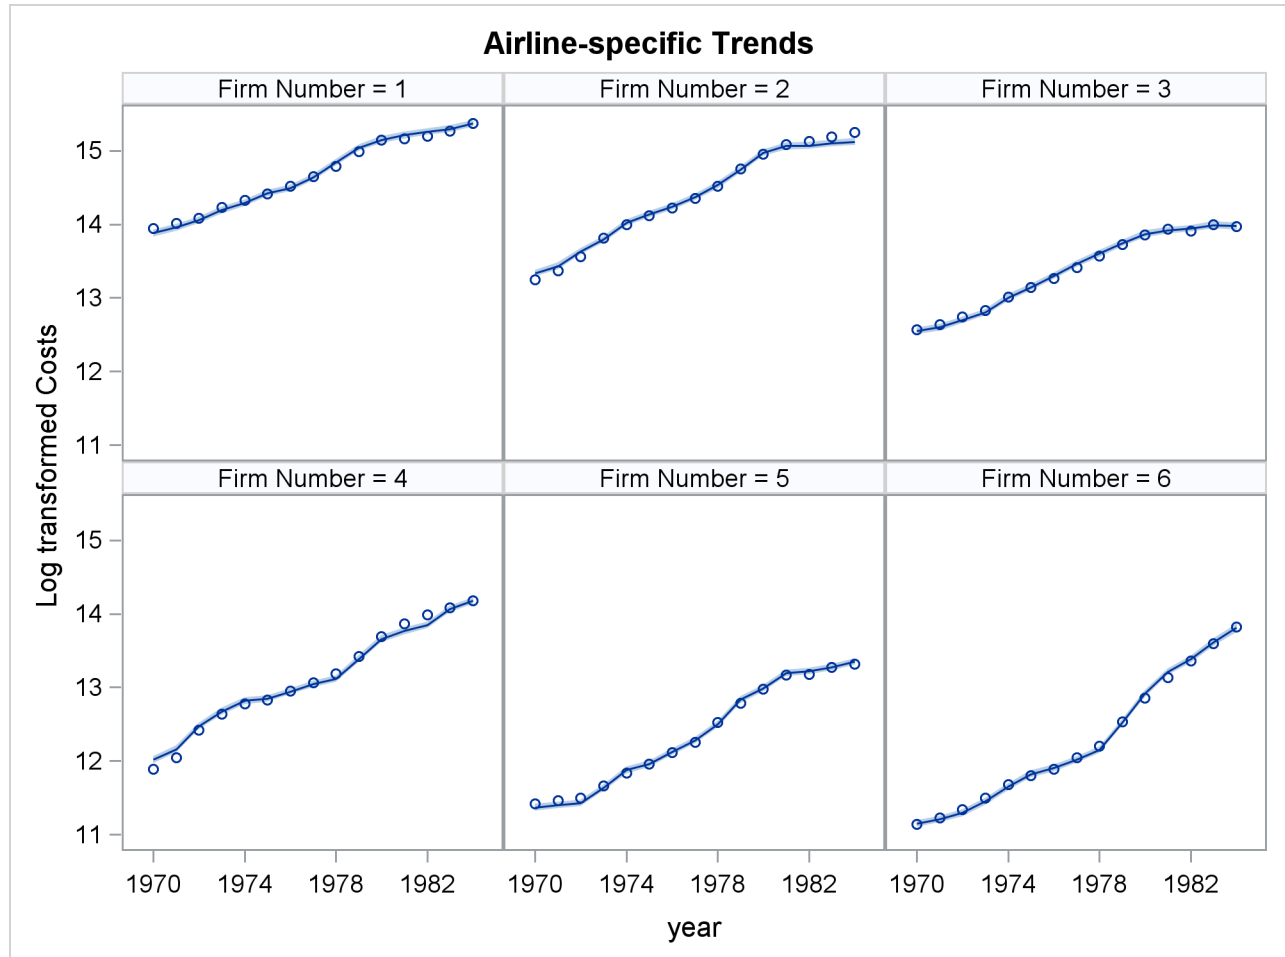
Similarly, you might wish to study the company-specific patterns implied by the fitted model. This can be done by using the smoothed estimate of `trendPlusReg`, a component defined by the `EVAL` statement in the program. The output data set, `for`, contains this estimate and contains its 95% confidence limits. However, `firmNumber`, the input data set variable that contains the company number, is not output to `for`. The following `DATA` step merges `for` with the input data set `airline`:

```
data for;
  merge for airline;
  by year;
run;
```

The following statements produce a panel of airline-specific trends. It is shown in [Output 27.1.8](#).

```
proc sgpanel data=for noautolegend;
  title 'Airline-specific Trends';
  panelby firmNumber / columns=3;
  band x=year lower=smoothed_lower_trendplusReg
      upper=smoothed_upper_trendplusReg;
```

```
scatter x=year y=lC;
series x=year y= smoothed_trendplusReg;
run;
```

Output 27.1.8 Airline-Specific Trends with 95% Confidence Bands

Example 27.2: Backcasting, Forecasting, and Interpolation

This example illustrates how you can do model-based extrapolation—backcasting, forecasting, or interpolation—of a response variable. All you need is to appropriately augment the input data set with the relevant ID and predictor information and assign missing values to the response variable in these places. Suppose that the response variable is named *Y*. Then, after an appropriate model is fit to the data, *smoothed_Y* (a variable in the output data set specified in the *OUT=* option in the *FORECAST* statement) contains the needed estimates of the extrapolated *Y* (the corresponding standard errors are in the variable *stderr_smoothed_Y*).

The following *DATA* step creates one such augmented data set by using a well-known data set that contains the recordings of the Nile river water level measured between the years 1871 and 1970. Suppose you want to backcast the Nile water level for two years before 1871, forecast it for two years after 1970, and interpolate its value for the year 1921—assuming that this value is missing in the available data set.


```

data nile;
  input level @@;
  year = intnx( 'year', '1jan1869'd, _n_-1 );
  format year year4.;
  if year = '1jan1921'd then level=.;
datalines;
. .
1120 1160 963 1210 1160 1160 813 1230 1370 1140
995 935 1110 994 1020 960 1180 799 958 1140
1100 1210 1150 1250 1260 1220 1030 1100 774 840
874 694 940 833 701 916 692 1020 1050 969
831 726 456 824 702 1120 1100 832 764 821
768 845 864 862 698 845 744 796 1040 759
781 865 845 944 984 897 822 1010 771 676
649 846 812 742 801 1040 860 874 848 890
744 749 838 1050 918 986 797 923 975 815
1020 906 901 1170 912 746 919 718 714 740
. .
;

```

It is also known that for this time span the Nile water level can be reasonably modeled as a sum of a random walk trend, a level shift in the year 1899, and the observation error. The following statements fit this model to the data. The forecast output is stored in `nileOut`.

```

proc ssm data=nile;
  id year interval=year;
  shift1899 = ( year >= '1jan1899'd );
  trend rw(rw);
  irregular wn;
  model level = shift1899 RW wn;
  forecast out=nileOut;
quit;

```

The following statements print the extrapolated values of the Nile water level, as shown in [Output 27.2.1](#).

```

proc print data=nileOut noobs;
  var year level smoothed_level stderr_smoothed_level;
  where level=.;
run;

```

Output 27.2.1 Extrapolated Nile Water Level

year	level	Smoothed_ level	StdErr_ Smoothed_ level
1869	.	1097.75	130.231
1870	.	1097.75	130.231
1921	.	851.13	128.864
1971	.	851.13	128.864
1972	.	851.13	128.864

Example 27.3: Smoothing of Repeated Measures Data

This example of a repeated measures study is taken from Diggle, Liang, and Zeger (1994, p. 100). The data consist of body weights of 27 cows, measured at 23 unequally spaced time points over a period of approximately 22 months. Following Diggle, Liang, and Zeger (1994), one animal is removed from the analysis, one observation is removed according to their Figure 5.7, and the time is shifted to start at 0 and is measured in 10-day increments. The design is a 2×2 factorial, and the factors are the infection of an animal with *M. paratuberculosis* and whether the animal is receiving iron dosing. The data set contains five variables: *cow* assigns a unique identification number—from 1 to 26—to each cow in the study, *tpoint* denotes the time of the growth measurement, *weight* denotes the growth measurement, *iron* is a dummy variable that indicates whether the animal is receiving iron or not, and *infection* is a dummy variable that indicates whether the animal is infected or not. The goal of the study is to assess the effect of iron and infection—and their possible interaction—on weight. The following DATA steps create this data set:

```
data times;
  input time1-time23;
  datalines;
122 150 166 179 219 247 276 296 324 354 380 445
478 508 536 569 599 627 655 668 723 751 781
;

data cows;
  if _n_ = 1 then merge times;
  array t{23} time1 - time23;
  array w{23} weight1 - weight23;
  input cow iron infection weight1-weight23 @@;
  do i=1 to 23;
    weight = w{i};
    tpoint = (t{i}-t{1})/10;
    output;
  end;
  keep cow iron infection tpoint weight;
  datalines;
1 0 0 4.7 4.905 5.011 5.075 5.136 5.165 5.298 5.323

... more lines ...
```

The following DATA step adds *ironInf*, a grouping variable that is used later during the plotting of the results. In the next step, the data are sorted by the index variable, *tpoint*.

```
data cows;
  set cows;
  ironInf = "No Iron and No Infection";
  if iron=1 and infection=1 then ironInf = "Iron and Infection";
  else if iron=1 and infection=0 then ironInf = "No Iron and Infection";
  else if iron=0 and infection=1 then ironInf = "Iron and No Infection";
  else ironInf = "No Iron and No Infection";
  run;

proc sort data=cows;
```

```

    by tpoint ;
run;

```

To assess the effect of iron and infection on weight, the natural growth profile of the animals must also be accounted for. Here two alternate models for this problem are considered. The first model assumes that the observed weight of an animal is the sum of a common growth profile, which is modeled by a polynomial spline trend of order 2, the regression effects of iron and infection, and the observation error—modeled as white noise. An interaction term, for interaction between iron and infection, was found to be insignificant and is not included. In the second model, the common growth profile and the regression variables of the first model are replaced by four environment specific growth profiles.

The following statements fit the first model:

```

proc ssm data=cows;
  id tpoint;
  trend growth(ps(2));
  irregular wn;
  model weight = iron infection growth wn;
  eval pattern = iron + infection + growth;
  forecast out=for;
quit;

```

Output 27.3.1 shows that the state dimension of this model is 2 (corresponding to the polynomial trend specification of order 2), the number of diffuse elements in the initial condition is 4 (corresponding to the trend and the two regressors iron and infection), and the number of unknown parameters is 2 (corresponding to the variance parameters of trend and irregular).

Output 27.3.1 Model1: Model Summary Information

The SSM Procedure	
Model Summary	
Model Property	Value
Number of Model Equations	1
State Dimension	2
Dimension of the Diffuse Initial Condition	4
Number of Parameters	2

Output 27.3.2 shows that the ID variable is irregularly spaced with replication.

Output 27.3.2 ID Variable Information

ID Variable Information				
Name	Start	End	MaxDelta	Type
tpoint	0	65.9000	6.50	Irregular with replication

The estimated regression coefficients of iron and infection, shown in [Output 27.3.3](#), are significant and negative. This implies that both iron and infection adversely affect the response variable, weight.

Output 27.3.3 Model 1: Regression Estimates

Estimates of the Regression Parameters					
Response Variable	Regression Variable	Estimate	Approx Std Error	t Value	Approx Pr > t
weight	iron	-0.07476	0.0076114	-9.82	<.0001
weight	infection	-0.12921	0.0085924	-15.04	<.0001

The variance estimates of the trend component and the irregular component are shown in [Output 27.3.4](#).

Output 27.3.4 Model 1: Estimates of Unnamed Parameters

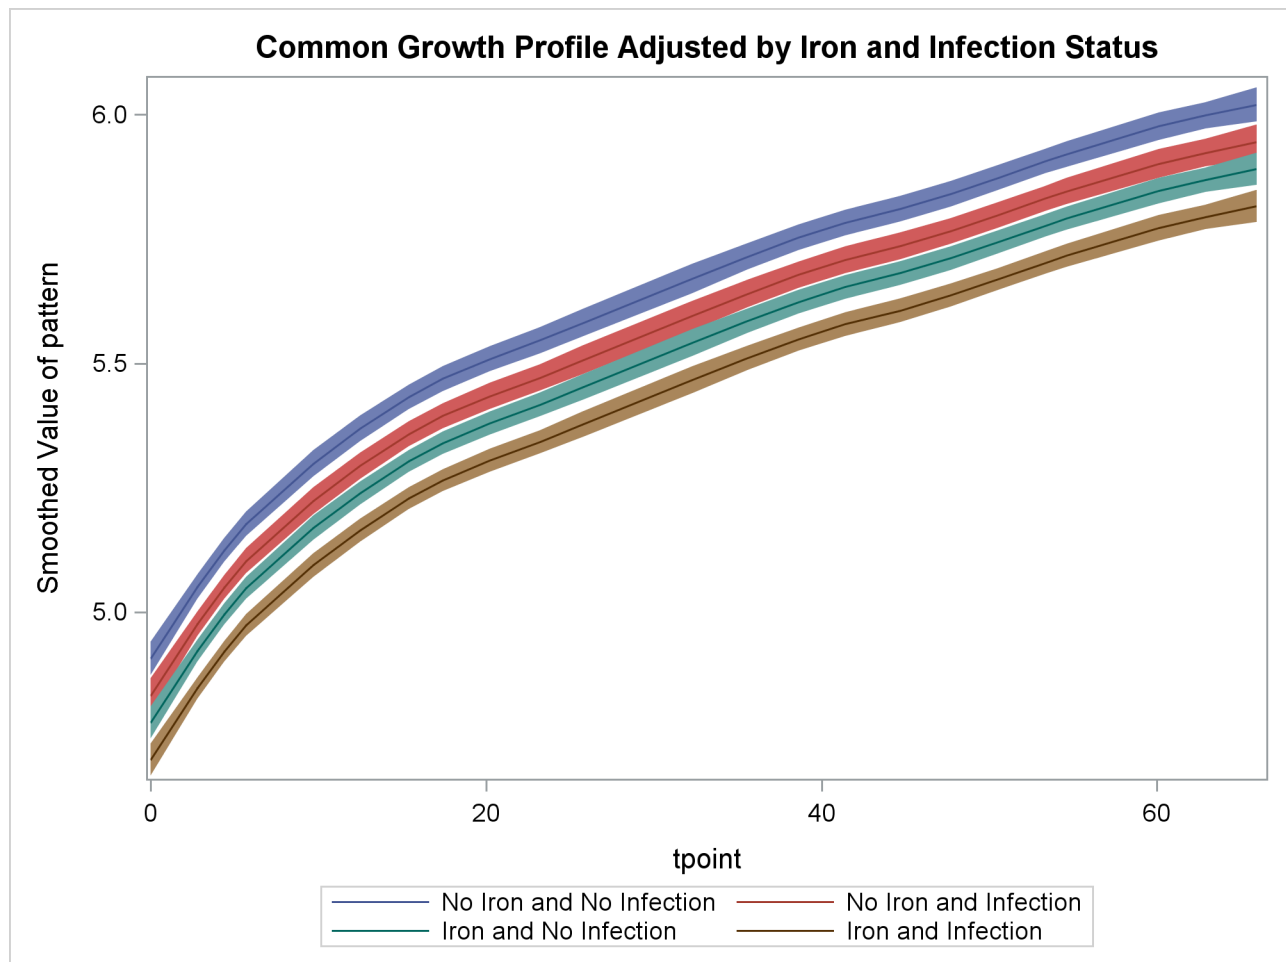
Maximum Likelihood Estimates of the Unknown System Parameters (Parameters Not Specified in the PARMS Statement)					
Component	Type	Parameter	Estimate	Approx Std Error	
growth	PS(2) Trend	Level Variance	0.00001625	9.01304E-6	
wn	Irregular	Variance	0.00858	0.0005034	

After examining the model fit, it is useful to study how well the patterns implied by the model follow the data. pattern, defined by the EVAL statement, is a sum of the trend component and the regression effects. A graphical examination of the smoothed estimate of pattern is done next. The following DATA step merges the output data set specified in the FORECAST statement, for, with the input data set, cows. In particular, this adds ironInf (a grouping variable from cows) to for.

```
data for;
  merge for cows;
  by tpoint;
run;
```

The following statements produce the graphs of smoothed_pattern, grouped according to the environment condition (see [Output 27.3.5](#)). The plot clearly shows that the control group “No Iron and No Infection” has the best growth profile, while the worst growth profile is for the group “Iron and Infection.”

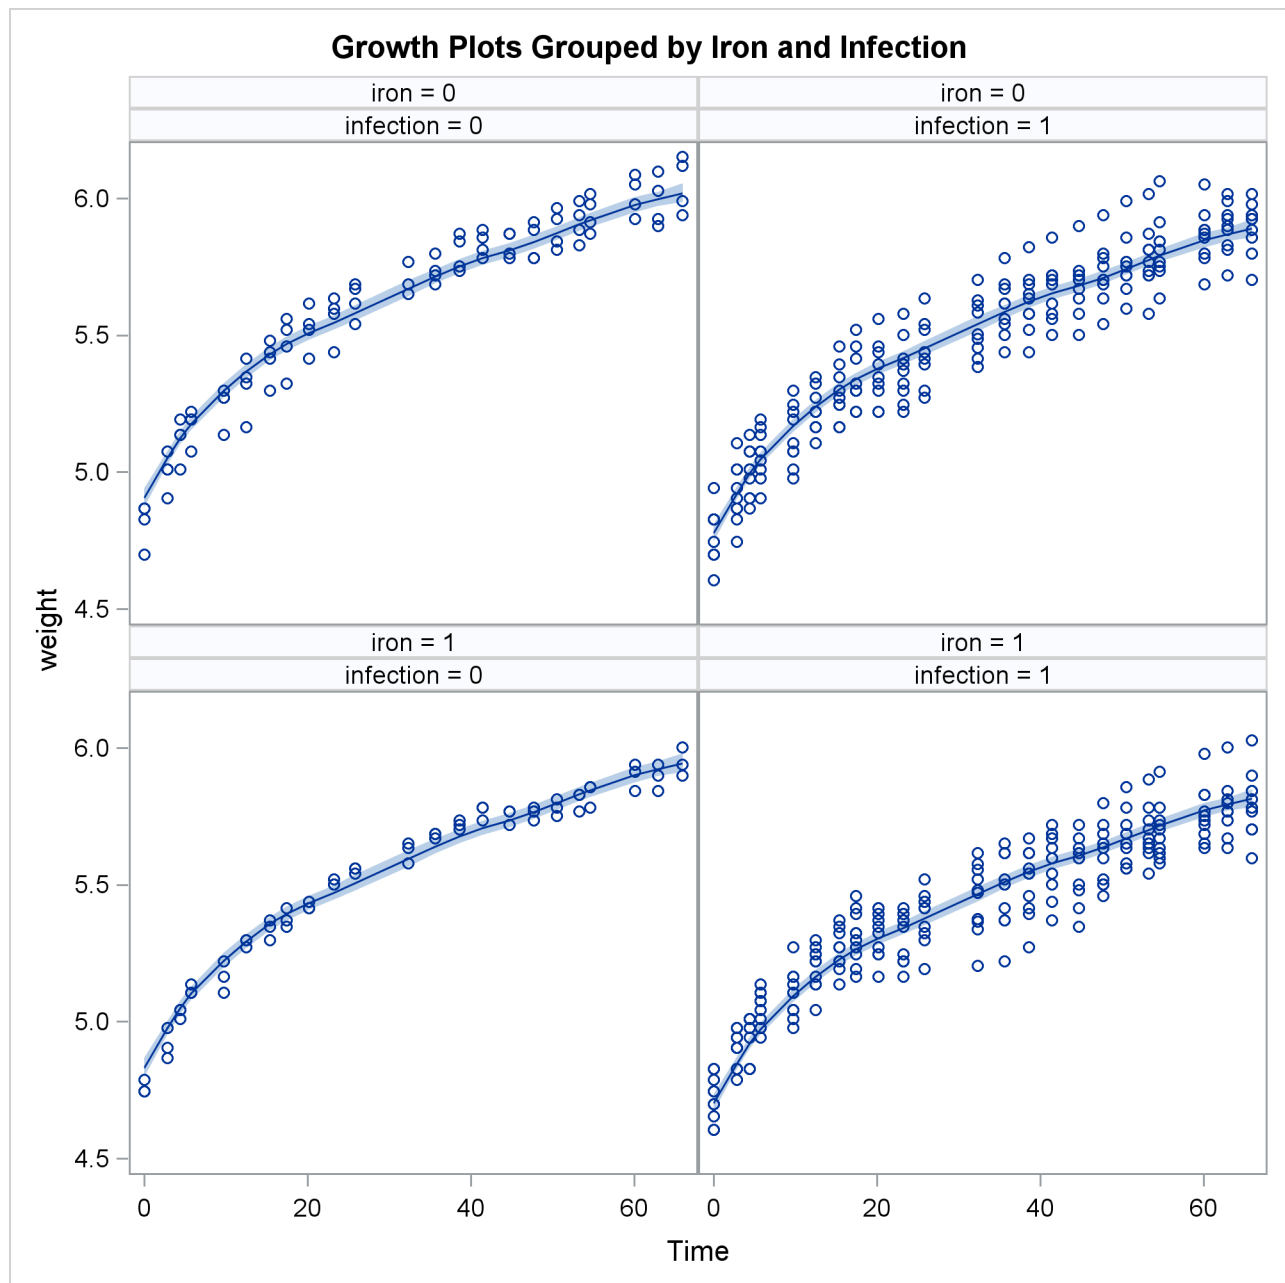
```
proc sgplot data=for noautolegend;
  title 'Common Growth Profile Adjusted by Iron and Infection Status';
  band x=tpoint lower=smoothed_lower_pattern
    upper=smoothed_upper_pattern / group=ironInf name="band";
  series x=tpoint y=smoothed_pattern / group=ironInf name="series";
  keylegend "series";
run;
```

Output 27.3.5 Model 1: Growth Profile Comparison with 95% Confidence Bands

The following statements produce a panel of plots that show how well `smoothed_pattern` follows the observed data:

```
proc sgpanel data=for noautolegend;
  title 'Growth Plots Grouped by Iron and Infection';
  label tpoint='Time' ;
  panelby iron infection / columns=2;
  band x=tpoint lower=smoothed_lower_pattern
        upper=smoothed_upper_pattern ;
  scatter x=tpoint y=weight;
  series x=tpoint y=smoothed_pattern ;
run;
```

Output 27.3.6 shows that the model fits the data reasonably well.

Output 27.3.6 Model 1: Smoothed Model Fit Lines

The following statements fit the second model. In this model separate polynomial trends are fit according to different settings of iron and infection by specifying an appropriate list of (dummy) variables in the **CROSS=** option of the trend specification.

```
proc ssm data=cows;
  id tpoint;
  a1 = (iron=1 and infection=1);
  a2 = (iron=1 and infection=0);
  a3 = (iron=0 and infection=1);
  a4 = (iron=0 and infection=0);
```

```

trend growth(ps(2)) cross=(a1-a4);
irregular wn;
model weight = growth wn;
forecast out=for1;
quit;

```

As a result of the **CROSS=** option, the trend component growth is actually a sum of four separate trends that correspond to the different iron-infection settings. Denoting growth by μ_t and the four independent trends by $\mu_{1,t}$, $\mu_{2,t}$, $\mu_{3,t}$, and $\mu_{4,t}$,

$$\mu_t = a1 * \mu_{1,t} + a2 * \mu_{2,t} + a3 * \mu_{3,t} + a4 * \mu_{4,t}$$

where a1, a2, a3, and a4 are the dummy variables specified in the **CROSS=** option. This shows that, for any given setting (say, the one for a4) μ_t is simply the corresponding trend $\mu_{4,t}$. The model summary, shown in [Output 27.3.7](#), reflects the increased state dimension and the increased number of parameters.

Output 27.3.7 Model2: Model Summary Information

The SSM Procedure	
Model Summary	
Model Property	Value
Number of Model Equations	1
State Dimension	8
Dimension of the Diffuse Initial Condition	8
Number of Parameters	5

[Output 27.3.8](#) shows the parameter estimates for this model.

Output 27.3.8 Model2: Estimates of Unnamed Parameters (Partial Output)

Component	Type	Parameter	Estimate
growth(Cross = a1)	PS(2) Trend	Level Variance	0.00001279
growth(Cross = a2)	PS(2) Trend	Level Variance	0.00000872
growth(Cross = a3)	PS(2) Trend	Level Variance	0.00000907
growth(Cross = a4)	PS(2) Trend	Level Variance	0.00000845
wn	Irregular	Variance	0.00839

Next, the smoothed estimate of trend (growth) is graphically studied. The following DATA step prepares the data for the grouped plots of smoothed_growth by merging for1 with the input data set cows. As before, the reason is merely to include ironInf (the grouping variable).

```

data for1;
  merge for1 cows;
  by tpoint;
run;

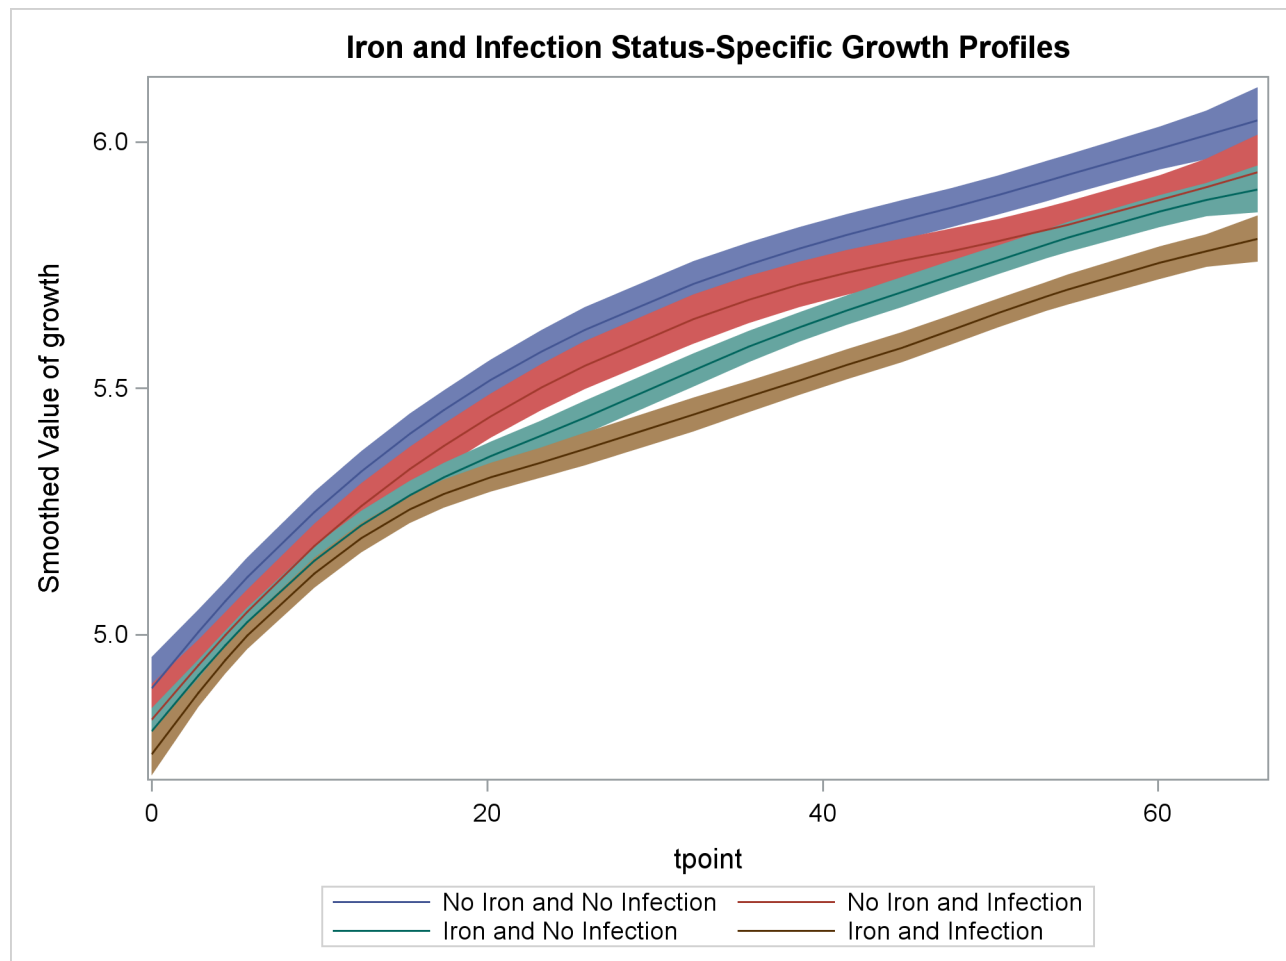
```

The following statements produce the graphs of smoothed μ_t for the desired settings (since the grouping variable ironInf exactly corresponds to these settings). Once again, the plot in [Output 27.3.9](#) clearly shows

that the control group “No Iron and No Infection” has the best growth profile, while the worst growth profile is for the group “Iron and Infection.” However, unlike the first model, the profile curves are not merely shifted versions of a common profile.

```
proc sgplot data=for1 noautolegend;
  title 'Iron and Infection Status-Specific Growth Profiles';
  band x=tpoint lower=smoothed_lower_growth
      upper=smoothed_upper_growth / group=ironInf name="band";
  series x=tpoint y=smoothed_growth / group=ironInf name="series";
  keylegend "series";
run;
```

Output 27.3.9 Model 2: Growth Profile Comparison with 95% Confidence Bands



Example 27.4: A User-Defined Trend Model

This example shows how to specify a continuous-time trend model discussed in Harvey (1989, chap. 9, sec. 9.2.1). This model is not one of the predefined trend models in the SSM procedure. The system matrices

that govern the two-dimensional state of this model are

$$\mathbf{T} = \begin{bmatrix} 1 & h \\ 0 & 1 \end{bmatrix}$$

$$\mathbf{Q} = \begin{bmatrix} h\sigma_1^2 + \frac{h^3\sigma_2^2}{3} & \frac{h^2\sigma_2^2}{2} \\ \frac{h^2\sigma_2^2}{2} & h\sigma_2^2 \end{bmatrix}$$

where $h = h_t = (\tau_{t+1} - \tau_t)$ denotes the difference between the successive time points, and the parameters σ_1^2 and σ_2^2 are called the level variance and the slope variance, respectively. The initial condition is fully diffuse. The trend component corresponds to the first element of this state vector. The second element of the state vector corresponds to the slope of this trend component. This model reduces to the polynomial spline model of order 2 if the level variance $\sigma_1^2 = 0$. See the section “[Polynomial Spline Trend](#)” on page 1798.

The following statements specify a trend-plus-noise model to model the growth of cows in the previous example ([Example 27.3](#)). The only cows that are considered are the ones that received iron and are infected.

```
proc ssm data=cows;
  where iron=1 and infection=1;
  id tpoint;
  parms var1 var2 / lower=(1.e-8 1.e-8);
  array tMat{2,2};
  tMat[1,1] = 1;
  tMat[2,2] = 1;
  tMat[1,2] = _ID_DELTA_;
  array covMat{2,2};
  covMat[1,1] = var1*_ID_DELTA_ + var2*_ID_DELTA_**3/3;
  covMat[1,2] = var2*_ID_DELTA_**2/2;
  covMat[2,1] = covMat[1,2] ;
  covMat[2,2] = var2*_ID_DELTA_;
  state harveyLL(2) T(g)=(tMat) cov(g)=(covMat) a1(2);
  component trend = harveyLL[1];
  component slope = harveyLL[2];
  irregular wn;
  model weight = trend wn;
  forecast out=for;
run;
```

The program is easy to follow. The PARMS statement declares var1 and var2 as positive parameters, which correspond to σ_1^2 and σ_2^2 , respectively. The programming statements define arrays tMat and covMat, which later become the matrices \mathbf{T} and \mathbf{Q} , respectively. Note that the element tMat[2,1] is left unassigned, since it is a structural zero of \mathbf{T} (see the section “[Sparse Transition Matrix Specification](#)” on page 1791 for more information). Recall that the predefined variable _ID_DELTA_ contains the value of h_t , which is needed for defining the elements of \mathbf{T} and \mathbf{Q} (see the section “[ID Statement](#)” on page 1779). The STATE statement defines the trend state vector, harveyLL, and the COMPONENT statement defines the trend component, trend, by selecting the first element of harveyLL. An additional COMPONENT statement defines the slope component, slope, as the second element of harveyLL. The slope component (which represents the cow’s growth rate) is not part of the observation equation; it is specified so that its estimate is output to for (the OUT= data set specified in the FORECAST statement). The observation noise is defined by the IRREGULAR statement, and the MODEL statement defines the trend-plus-noise model.

The estimates of var1 and var2 are shown in [Output 27.4.1](#). It shows that the estimate of the level variance is nearly zero, implying that the fitted trend model is identical to the polynomial spline trend of order 2.

Output 27.4.1 Estimates of the Named Parameters

The SSM Procedure		
Maximum Likelihood Estimates of the Parameters Specified in the PARMS Statement		
Parameter	Estimate	Approx Std Error
var1	1E-8	0.0008486
var2	0.00001236	.

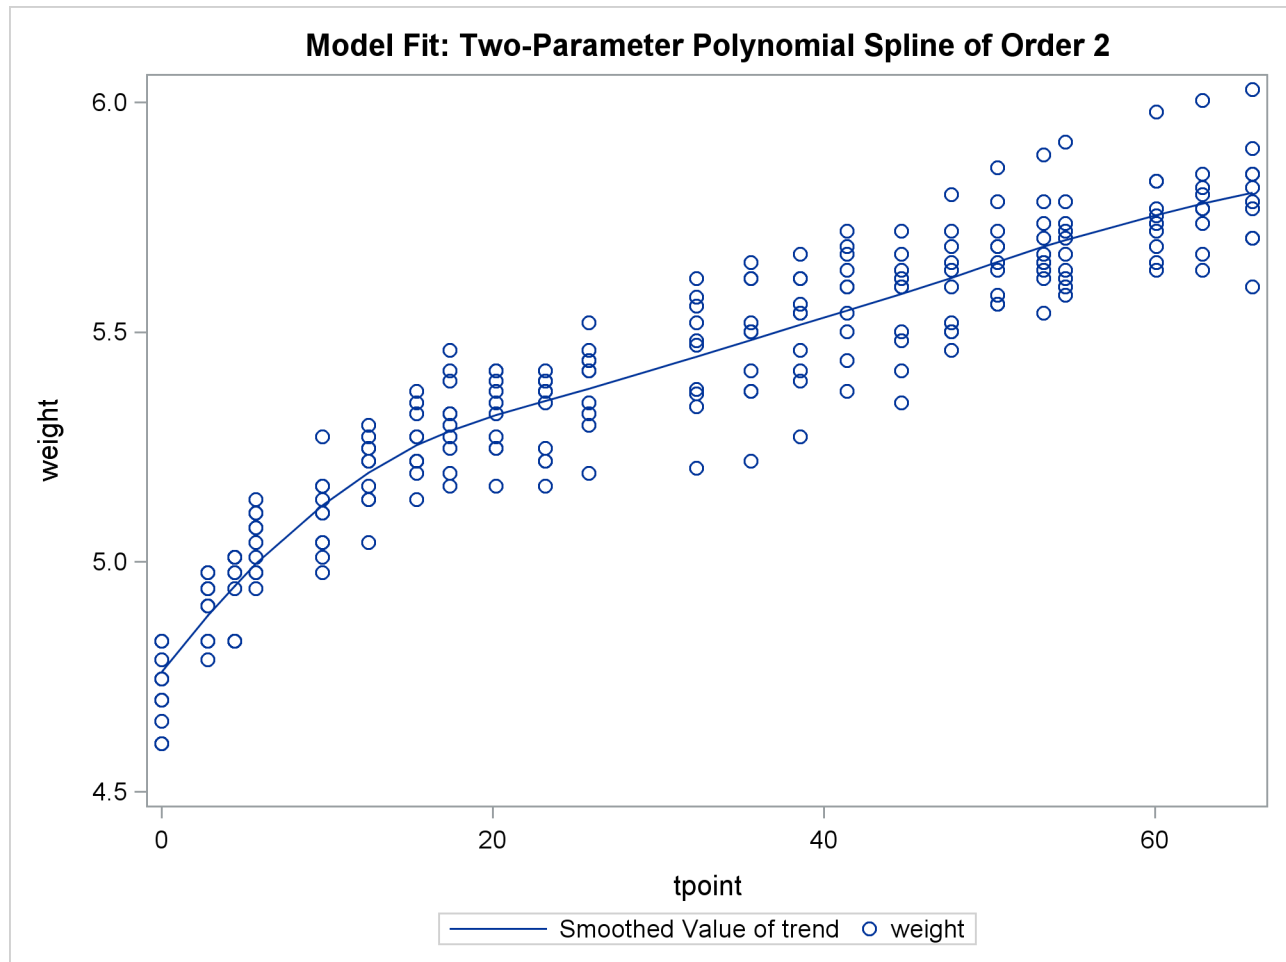
The estimate of the noise variance is shown in [Output 27.4.2](#).

Output 27.4.2 Estimates of the Unnamed Parameters

Maximum Likelihood Estimates of the Unknown System Parameters (Parameters Not Specified in the PARMS Statement)				
Component	Type	Parameter	Estimate	Approx Std Error
wn	Irregular	Variance	0.00954	0.0009094

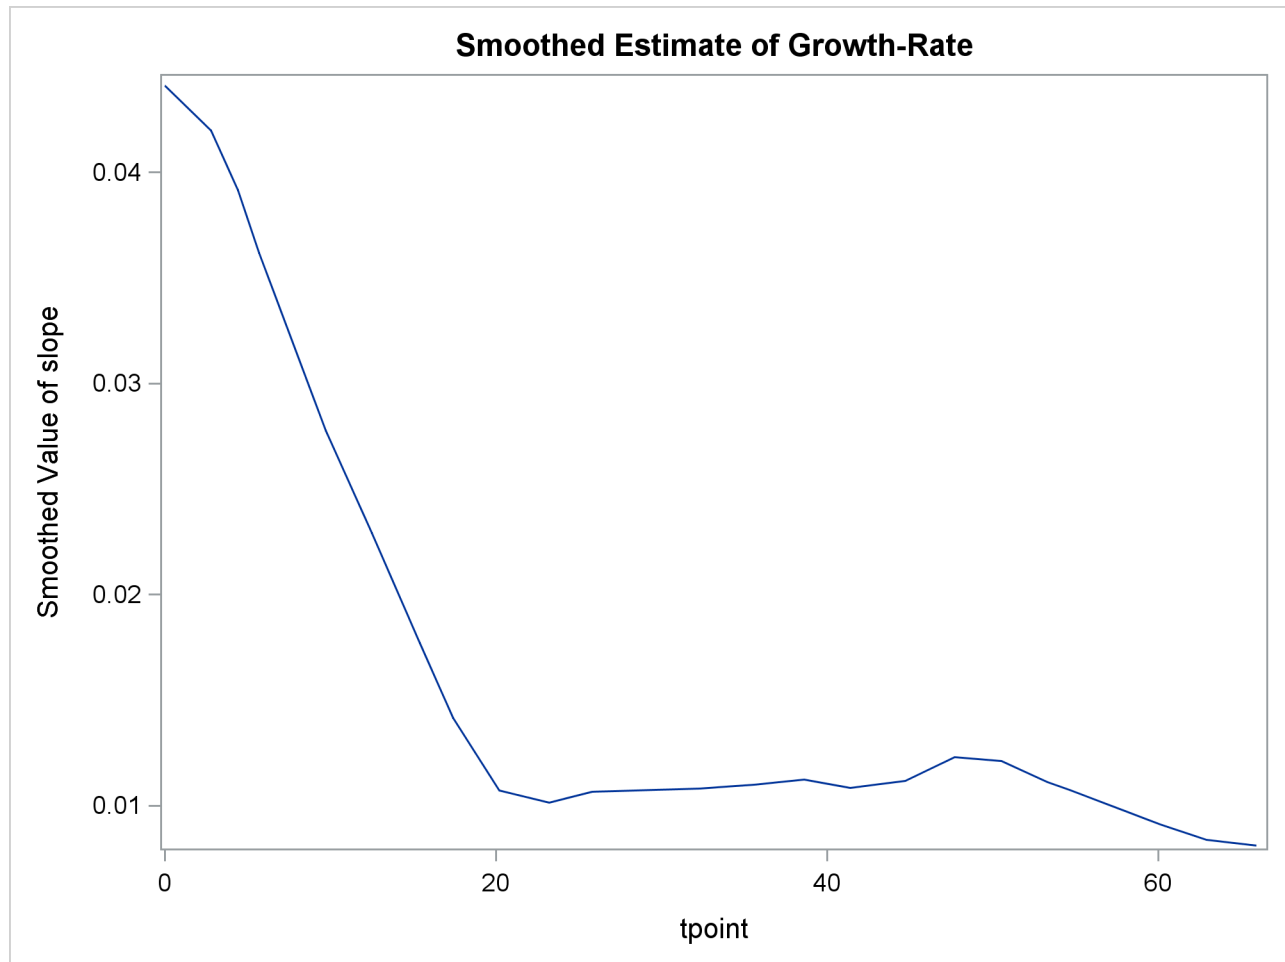
The following statements produce the plot of the fit of this trend model (shown in [Output 27.4.3](#)).

```
proc sgplot data=for;
  title "Model Fit: Two-Parameter Polynomial Spline of Order 2";
  series x=tpoint y=smoothed_trend;
  scatter x=tpoint y=weight;
run;
```

Output 27.4.3 A User-Defined Trend Model

The following statements produce the plot of the estimate of the slope component (shown in [Output 27.4.4](#)). This plot complements the preceding plot of trend; it shows the pattern of decline in the growth rate as the animals age.

```
proc sgplot data=for;
  title "Smoothed Estimate of Growth-Rate";
  series x=tpoint y=smoothed_slope;
run;
```

Output 27.4.4 Estimate of the slope Component

References

- Akaike, H. (1974), "A New Look at the Statistical Model Identification," *IEEE Transaction on Automatic Control*, AC-19, 716–723.
- Anderson, B. D. O. and Moore, J. B. (1979), *Optimal Filtering*, Englewood Cliffs: Prentice-Hall.
- Bozdogan, H. (1987), "Model Selection and Akaike's Information Criterion (AIC): The General Theory and Its Analytical Extensions," *Psychometrika*, 52, 345–370.
- Burnham, K. P. and Anderson, D. R. (1998), *Model Selection and Inference: A Practical Information-Theoretic Approach*, New York: Springer-Verlag.
- de Jong, P. (1989), "Smoothing and Interpolation with the State-Space Model," *Journal of the American Statistical Association*, 84(408), 1085–1088.
- de Jong, P. (1991), "The Diffuse Kalman Filter," *Annals of Statistics*, 19, 1073–83.

- de Jong, P. and Chu-Chun-Lin, S. (2003), “Smoothing with an Unknown Initial Condition,” *Journal of Time Series Analysis*, 24 (2), 141–148.
- de Jong, P. and Mazzi, S. (2001), “Modeling and Smoothing Unequally Spaced Sequence Data,” *Statistical Inference for Stochastic Processes*, 4, 53–71.
- de Jong, P. and Penzer, J. (1998), “Diagnosing Shocks in Time Series,” *Journal of the American Statistical Association*, 93(442), 796–806.
- Diggle, P. J., Liang, K.-Y., and Zeger, S. L. (1994), *Analysis of Longitudinal Data*, Oxford, UK: Oxford University Press.
- Durbin, J. and Koopman, S. J. (2001), *Time Series Analysis by State Space Methods*, Oxford, UK: Oxford University Press.
- Greene, W. H. (2000), *Econometric Analysis*, Fourth Edition, New York: Macmillan Publishing Company.
- Hannan, E.J. and Quinn, B.G. (1979), “The Determination of the Order of an Autoregression,” *Journal of the Royal Statistical Society, Series B*, 41, 190–195.
- Harvey, A. C. (1989), *Forecasting, Structural Time Series Models and the Kalman Filter*, Cambridge: Cambridge University Press.
- Hurvich, C. M. and Tsai, C.-L. (1989), “Regression and Time Series Model Selection in Small Samples,” *Biometrika*, 76, 297–307.
- Jones, R. H. (1993), *Longitudinal Data with Serial Correlation: A State Space Approach*, London: Chapman & Hall.
- Kohn, R. and Ansley, C. F. (1991), “A Signal Extraction Approach to the Estimation of Treatment and Control Curves,” *Journal of the American Statistical Association*, 86(416), 1034–1041.
- Schwarz, G. (1978), “Estimating the Dimension of a Model,” *Annals of Statistics*, 6, 461–464.
- Selukar, R. S. (2010), “Estimability of the Linear Effects in State Space Models with an Unknown Initial Condition,” *Journal of Time Series Analysis*, 31(3), 167–168.
- Wecker, W. E. and Ansley, C. F. (1983), “The Signal Extraction Approach to Nonlinear Regression and Spline Smoothing,” *Journal of the American Statistical Association*, 78, 81–9.

Chapter 28

The STATESPACE Procedure

Contents

Overview: STATESPACE Procedure	1830
The State Space Model	1830
How PROC STATESPACE Works	1831
Getting Started: STATESPACE Procedure	1832
Automatic State Space Model Selection	1833
Specifying the State Space Model	1840
Syntax: STATESPACE Procedure	1842
Functional Summary	1843
PROC STATESPACE Statement	1844
BY Statement	1847
FORM Statement	1848
ID Statement	1848
INITIAL Statement	1848
RESTRICT Statement	1849
VAR Statement	1849
Details: STATESPACE Procedure	1850
Missing Values	1850
Stationarity and Differencing	1850
Preliminary Autoregressive Models	1851
Canonical Correlation Analysis	1854
Parameter Estimation	1857
Forecasting	1859
Relation of ARMA and State Space Forms	1861
OUT= Data Set	1862
OUTAR= Data Set	1863
OUTMODEL= Data Set	1864
Printed Output	1865
ODS Table Names	1866
Examples: STATESPACE Procedure	1867
Example 28.1: Series J from Box and Jenkins	1867
References	1873

Overview: STATESPACE Procedure

The STATESPACE procedure uses the state space model to analyze and forecast multivariate time series. The STATESPACE procedure is appropriate for jointly forecasting several related time series that have dynamic interactions. By taking into account the autocorrelations among all the variables in a set, the STATESPACE procedure can give better forecasts than methods that model each series separately.

By default, the STATESPACE procedure automatically selects a state space model appropriate for the time series, making the procedure a good tool for automatic forecasting of multivariate time series. Alternatively, you can specify the state space model by giving the form of the state vector and the state transition and innovation matrices.

The methods used by the STATESPACE procedure assume that the time series are jointly stationary. Non-stationary series must be made stationary by some preliminary transformation, usually by differencing. The STATESPACE procedure enables you to specify differencing of the input data. When differencing is specified, the STATESPACE procedure automatically integrates forecasts of the differenced series to produce forecasts of the original series.

The State Space Model

The *state space model* represents a multivariate time series through auxiliary variables, some of which might not be directly observable. These auxiliary variables are called the *state vector*. The state vector summarizes all the information from the present and past values of the time series that is relevant to the prediction of future values of the series. The observed time series are expressed as linear combinations of the state variables. The state space model is also called a Markovian representation, or a canonical representation, of a multivariate time series process. The state space approach to modeling a multivariate stationary time series is summarized in Akaike (1976).

The state space form encompasses a very rich class of models. Any Gaussian multivariate stationary time series can be written in a state space form, provided that the dimension of the predictor space is finite. In particular, any autoregressive moving average (ARMA) process has a state space representation and, conversely, any state space process can be expressed in an ARMA form (Akaike 1974). More details on the relation of the state space and ARMA forms are given in the section “[Relation of ARMA and State Space Forms](#)” on page 1861.

Let \mathbf{x}_t be the $r \times 1$ vector of observed variables, after differencing (if differencing is specified) and subtracting the sample mean. Let \mathbf{z}_t be the state vector of dimension s , $s \geq r$, where the first r components of \mathbf{z}_t consist of \mathbf{x}_t . Let the notation $\mathbf{x}_{t+k|t}$ represent the conditional expectation (or prediction) of \mathbf{x}_{t+k} based on the information available at time t . Then the last $s - r$ elements of \mathbf{z}_t consist of elements of $\mathbf{x}_{t+k|t}$, where $k > 0$ is specified or determined automatically by the procedure.

There are various forms of the state space model in use. The form of the state space model used by the STATESPACE procedure is based on Akaike (1976). The model is defined by the following *state transition equation* :

$$\mathbf{z}_{t+1} = \mathbf{F}\mathbf{z}_t + \mathbf{G}\mathbf{e}_{t+1}$$

In the state transition equation, the $s \times s$ coefficient matrix \mathbf{F} is called the *transition matrix*; it determines the dynamic properties of the model.

The $s \times r$ coefficient matrix \mathbf{G} is called the *input matrix*; it determines the variance structure of the transition equation. For model identification, the first r rows and columns of \mathbf{G} are set to an $r \times r$ identity matrix.

The input vector \mathbf{e}_t is a sequence of independent normally distributed random vectors of dimension r with mean $\mathbf{0}$ and covariance matrix Σ_{ee} . The random error \mathbf{e}_t is sometimes called the innovation vector or shock vector.

In addition to the state transition equation, state space models usually include a *measurement equation* or *observation equation* that gives the observed values \mathbf{x}_t as a function of the state vector \mathbf{z}_t . However, since PROC STATESPACE always includes the observed values \mathbf{x}_t in the state vector \mathbf{z}_t , the measurement equation in this case merely represents the extraction of the first r components of the state vector.

The measurement equation used by the STATESPACE procedure is

$$\mathbf{x}_t = [\mathbf{I}_r \mathbf{0}] \mathbf{z}_t$$

where \mathbf{I}_r is an $r \times r$ identity matrix. In practice, PROC STATESPACE performs the extraction of \mathbf{x}_t from \mathbf{z}_t without reference to an explicit measurement equation.

In summary:

\mathbf{x}_t	is an observation vector of dimension r .
\mathbf{z}_t	is a state vector of dimension s , whose first r elements are \mathbf{x}_t and whose last $s - r$ elements are conditional prediction of future \mathbf{x}_t .
\mathbf{F}	is an $s \times s$ transition matrix.
\mathbf{G}	is an $s \times r$ input matrix, with the identity matrix \mathbf{I}_r forming the first r rows and columns.
\mathbf{e}_t	is a sequence of independent normally distributed random vectors of dimension r with mean $\mathbf{0}$ and covariance matrix Σ_{ee} .

How PROC STATESPACE Works

The design of the STATESPACE procedure closely follows the modeling strategy proposed by Akaike (1976). This strategy employs canonical correlation analysis for the automatic identification of the state space model.

Following Akaike (1976), the procedure first fits a sequence of unrestricted vector autoregressive (VAR) models and computes Akaike's information criterion (AIC) for each model. The vector autoregressive models are estimated using the sample autocovariance matrices and the Yule-Walker equations. The order of the VAR model that produces the smallest Akaike information criterion is chosen as the order (number of lags into the past) to use in the canonical correlation analysis.

The elements of the state vector are then determined via a sequence of canonical correlation analyses of the sample autocovariance matrices through the selected order. This analysis computes the sample canonical correlations of the past with an increasing number of steps into the future. Variables that yield significant

correlations are added to the state vector; those that yield insignificant correlations are excluded from further consideration. The importance of the correlation is judged on the basis of another information criterion proposed by Akaike. See the section “[Canonical Correlation Analysis Options](#)” on page 1845 for details. If you specify the state vector explicitly, these model identification steps are omitted.

After the state vector is determined, the state space model is fit to the data. The free parameters in the **F**, **G**, and Σ_{ee} matrices are estimated by approximate maximum likelihood. By default, the **F** and **G** matrices are unrestricted, except for identifiability requirements. Optionally, conditional least squares estimates can be computed. You can impose restrictions on elements of the **F** and **G** matrices.

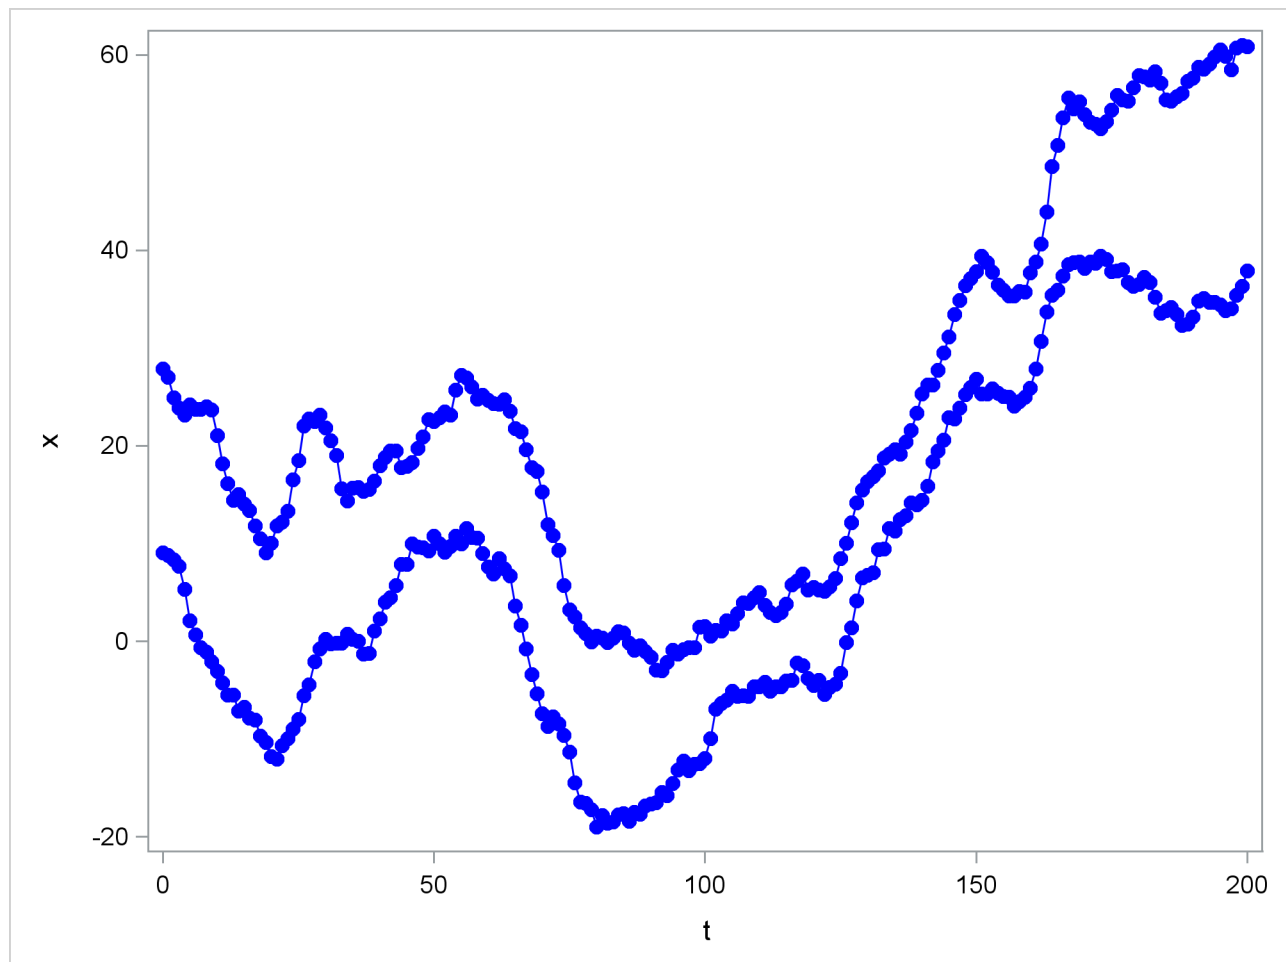
After the parameters are estimated, the Kalman filtering technique is used to produce forecasts from the fitted state space model. If differencing was specified, the forecasts are integrated to produce forecasts of the original input variables.

Getting Started: STATESPACE Procedure

The following introductory example uses simulated data for two variables X and Y. The following statements generate the X and Y series.

```
data in;
  x=10;  y=40;
  x1=0;  y1=0;
  a1=0;  b1=0;
  iseed=123;
  do t=-100 to 200;
    a=rannor(iseed);
    b=rannor(iseed);
    dx = 0.5*x1 + 0.3*y1 + a - 0.2*a1 - 0.1*b1;
    dy = 0.3*x1 + 0.5*y1 + b;
    x = x + dx + .25;
    y = y + dy + .25;
    if t >= 0 then output;
    x1 = dx; y1 = dy;
    a1 = a; b1 = b;
  end;
  keep t x y;
run;
```

The simulated series X and Y are shown in [Figure 28.1](#).

Figure 28.1 Example Series

Automatic State Space Model Selection

The STATESPACE procedure is designed to automatically select the best state space model for forecasting the series. You can specify your own model if you want, and you can use the output from PROC STATESPACE to help you identify a state space model. However, the easiest way to use PROC STATESPACE is to let it choose the model.

Stationarity and Differencing

Although PROC STATESPACE selects the state space model automatically, it does assume that the input series are stationary. If the series are nonstationary, then the process might fail. Therefore the first step is to examine your data and test to see if differencing is required. (See the section “[Stationarity and Differencing](#)” on page 1850 for further discussion of this issue.)

The series shown in [Figure 28.1](#) are nonstationary. In order to forecast X and Y with a state space model, you must difference them (or use some other detrending method). If you fail to difference when needed

and try to use PROC STATESPACE with nonstationary data, an inappropriate state space model might be selected, and the model estimation might fail to converge.

The following statements identify and fit a state space model for the first differences of X and Y, and forecast X and Y 10 periods ahead:

```
proc statespace data=in out=out lead=10;
  var x(1) y(1);
  id t;
run;
```

The DATA= option specifies the input data set and the OUT= option specifies the output data set for the forecasts. The LEAD= option specifies forecasting 10 observations past the end of the input data. The VAR statement specifies the variables to forecast and specifies differencing. The notation X(1) Y(1) specifies that the state space model analyzes the first differences of X and Y.

Descriptive Statistics and Preliminary Autoregressions

The first page of the printed output produced by the preceding statements is shown in Figure 28.2.

Figure 28.2 Descriptive Statistics and VAR Order Selection

The STATESPACE Procedure								
Number of Observations		200						
Variable	Mean	Standard Error						
x	0.144316	1.233457	Has been differenced. With period(s) = 1.					
y	0.164871	1.304358	Has been differenced. With period(s) = 1.					
The STATESPACE Procedure								
Information Criterion for Autoregressive Models								
Lag=0	Lag=1	Lag=2	Lag=3	Lag=4	Lag=5	Lag=6	Lag=7	Lag=8
149.697	8.387786	5.517099	12.05986	15.36952	21.79538	24.00638	29.88874	33.55708
Information Criterion for Autoregressive Models								
			Lag=9	Lag=10				
			41.17606	47.70222				

Figure 28.2 *continued*

Schematic Representation of Correlations											
Name/Lag	0	1	2	3	4	5	6	7	8	9	10
x	++	++	++	++	++	++	+	..	+	+	..
y	++	++	++	++	++	+	+	+	+
+ is > 2*std error, - is < -2*std error, . is between											

Descriptive statistics are printed first, giving the number of nonmissing observations after differencing and the sample means and standard deviations of the differenced series. The sample means are subtracted before the series are modeled (unless the NOCENTER option is specified), and the sample means are added back when the forecasts are produced.

Let X_t and Y_t be the observed values of X and Y, and let x_t and y_t be the values of X and Y after differencing and subtracting the mean difference. The series \mathbf{x}_t modeled by the STATESPACE procedure is

$$\mathbf{x}_t = \begin{bmatrix} x_t \\ y_t \end{bmatrix} = \begin{bmatrix} (1 - B)X_t - 0.144316 \\ (1 - B)Y_t - 0.164871 \end{bmatrix}$$

where B represents the backshift operator.

After the descriptive statistics, PROC STATESPACE prints the Akaike information criterion (AIC) values for the autoregressive models fit to the series. The smallest AIC value, in this case 5.517 at lag 2, determines the number of autocovariance matrices analyzed in the canonical correlation phase.

A schematic representation of the autocorrelations is printed next. This indicates which elements of the autocorrelation matrices at different lags are significantly greater than or less than 0.

The second page of the STATESPACE printed output is shown in Figure 28.3.

Figure 28.3 Partial Autocorrelations and VAR Model

Schematic Representation of Partial Autocorrelations											
Name/Lag	1	2	3	4	5	6	7	8	9	10	
x	++	+	
y	++	
+ is > 2*std error, - is < -2*std error, . is between											
Yule-Walker Estimates for Minimum AIC											
-----Lag=1-----				-----Lag=2-----							
	x		y		x		y				
x	0.257438		0.202237		0.170812		0.133554				
y	0.292177		0.469297		-0.00537		-0.00048				

Figure 28.3 shows a schematic representation of the partial autocorrelations, similar to the autocorrelations shown in Figure 28.2. The selection of a second order autoregressive model by the AIC statistic looks reasonable in this case because the partial autocorrelations for lags greater than 2 are not significant.

Next, the Yule-Walker estimates for the selected autoregressive model are printed. This output shows the coefficient matrices of the vector autoregressive model at each lag.

Selected State Space Model Form and Preliminary Estimates

After the autoregressive order selection process has determined the number of lags to consider, the canonical correlation analysis phase selects the state vector. By default, output for this process is not printed. You can use the CANCELL option to print details of the canonical correlation analysis. See the section “[Canonical Correlation Analysis Options](#)” on page 1845 for an explanation of this process.

After the state vector is selected, the state space model is estimated by approximate maximum likelihood. Information from the canonical correlation analysis and from the preliminary autoregression is used to form preliminary estimates of the state space model parameters. These preliminary estimates are used as starting values for the iterative estimation process.

The form of the state vector and the preliminary estimates are printed next, as shown in Figure 28.4.

Figure 28.4 Preliminary Estimates of State Space Model

The STATESPACE Procedure		
Selected Statespace Form and Preliminary Estimates		
State Vector		
$\mathbf{x}(T;T)$	$\mathbf{y}(T;T)$	$\mathbf{x}(T+1;T)$
Estimate of Transition Matrix		
0	0	1
0.291536	0.468762	-0.00411
0.24869	0.24484	0.204257
Input Matrix for Innovation		
1	0	
0	1	
0.257438	0.202237	
Variance Matrix for Innovation		
0.945196	0.100786	
0.100786	1.014703	

Figure 28.4 first prints the state vector as $X[T;T] \ Y[T;T] \ X[T+1;T]$. This notation indicates that the state vector is

$$\mathbf{z}_t = \begin{bmatrix} x_{t|t} \\ y_{t|t} \\ x_{t+1|t} \end{bmatrix}$$

The notation $x_{t+1|t}$ indicates the conditional expectation or prediction of x_{t+1} based on the information available at time t , and $x_{t|t}$ and $y_{t|t}$ are x_t and y_t , respectively.

The remainder of Figure 28.4 shows the preliminary estimates of the transition matrix \mathbf{F} , the input matrix \mathbf{G} , and the covariance matrix Σ_{ee} .

Estimated State Space Model

The next page of the STATESPACE output prints the final estimates of the fitted model, as shown in Figure 28.5. This output has the same form as in Figure 28.4, but it shows the maximum likelihood estimates instead of the preliminary estimates.

Figure 28.5 Fitted State Space Model

The STATESPACE Procedure		
Selected Statespace Form and Fitted Model		
State Vector		
$\mathbf{x}(T;T)$	$\mathbf{y}(T;T)$	$\mathbf{x}(T+1;T)$
Estimate of Transition Matrix		
0	0	1
0.297273	0.47376	-0.01998
0.2301	0.228425	0.256031
Input Matrix for Innovation		
1	0	
0	1	
0.257284	0.202273	
Variance Matrix for Innovation		
0.945188	0.100752	
0.100752	1.014712	

The estimated state space model shown in Figure 28.5 is

$$\begin{bmatrix} x_{t+1|t+1} \\ y_{t+1|t+1} \\ x_{t+2|t+1} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 \\ 0.297 & 0.474 & -0.020 \\ 0.230 & 0.228 & 0.256 \end{bmatrix} \begin{bmatrix} x_t \\ y_t \\ x_{t+1|t} \end{bmatrix} + \begin{bmatrix} 1 & 0 \\ 0 & 1 \\ 0.257 & 0.202 \end{bmatrix} \begin{bmatrix} e_{t+1} \\ n_{t+1} \end{bmatrix}$$

$$\text{var} \begin{bmatrix} e_{t+1} \\ n_{t+1} \end{bmatrix} = \begin{bmatrix} 0.945 & 0.101 \\ 0.101 & 1.015 \end{bmatrix}$$

The next page of the STATESPACE output lists the estimates of the free parameters in the **F** and **G** matrices with standard errors and *t* statistics, as shown in Figure 28.6.

Figure 28.6 Final Parameter Estimates

Parameter Estimates				
Parameter	Estimate	Standard Error	t Value	
F(2,1)	0.297273	0.129995	2.29	
F(2,2)	0.473760	0.115688	4.10	
F(2,3)	-0.01998	0.313025	-0.06	
F(3,1)	0.230100	0.126226	1.82	
F(3,2)	0.228425	0.112978	2.02	
F(3,3)	0.256031	0.305256	0.84	
G(3,1)	0.257284	0.071060	3.62	
G(3,2)	0.202273	0.068593	2.95	

Convergence Failures

The maximum likelihood estimates are computed by an iterative nonlinear maximization algorithm, which might not converge. If the estimates fail to converge, warning messages are printed in the output.

If you encounter convergence problems, you should recheck the stationarity of the data and ensure that the specified differencing orders are correct. Attempting to fit state space models to nonstationary data is a common cause of convergence failure. You can also use the MAXIT= option to increase the number of iterations allowed, or experiment with the convergence tolerance options DETTOL= and PARMTOL=.

Forecast Data Set

The following statements print the output data set. The WHERE statement excludes the first 190 observations from the output, so that only the forecasts and the last 10 actual observations are printed.

```
proc print data=out;
  id t;
  where t > 190;
run;
```

The PROC PRINT output is shown in Figure 28.7.

Figure 28.7 OUT= Data Set Produced by PROC STATESPACE

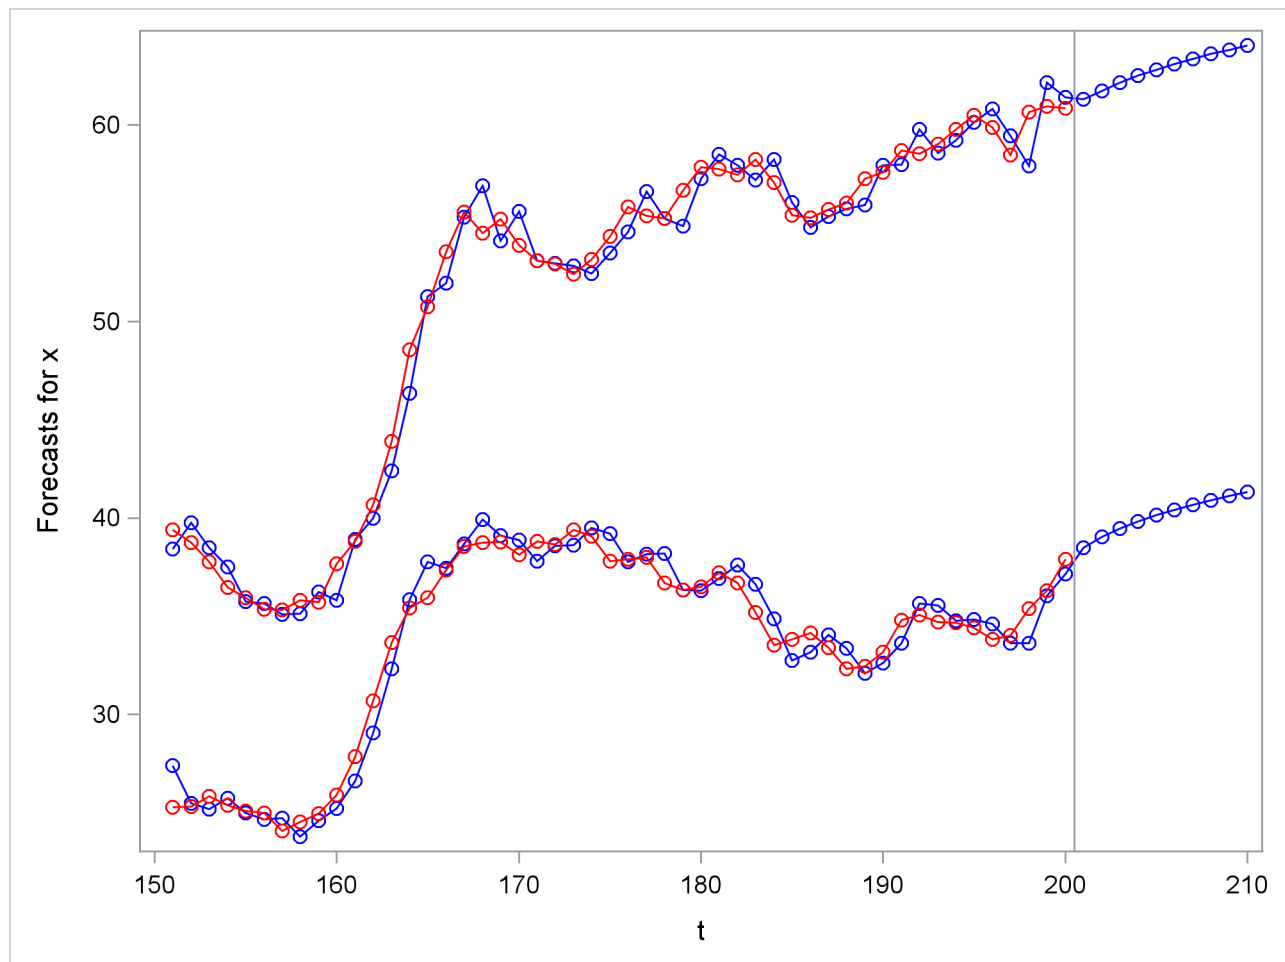
t	x	FOR1	RES1	STD1	y	FOR2	RES2	STD2
191	34.8159	33.6299	1.18600	0.97221	58.7189	57.9916	0.72728	1.00733
192	35.0656	35.6598	-0.59419	0.97221	58.5440	59.7718	-1.22780	1.00733
193	34.7034	35.5530	-0.84962	0.97221	59.0476	58.5723	0.47522	1.00733
194	34.6626	34.7597	-0.09707	0.97221	59.7774	59.2241	0.55330	1.00733
195	34.4055	34.8322	-0.42664	0.97221	60.5118	60.1544	0.35738	1.00733
196	33.8210	34.6053	-0.78434	0.97221	59.8750	60.8260	-0.95102	1.00733
197	34.0164	33.6230	0.39333	0.97221	58.4698	59.4502	-0.98046	1.00733
198	35.3819	33.6251	1.75684	0.97221	60.6782	57.9167	2.76150	1.00733
199	36.2954	36.0528	0.24256	0.97221	60.9692	62.1637	-1.19450	1.00733
200	37.8945	37.1431	0.75142	0.97221	60.8586	61.4085	-0.54984	1.00733
201	.	38.5068	.	0.97221	.	61.3161	.	1.00733
202	.	39.0428	.	1.59125	.	61.7509	.	1.83678
203	.	39.4619	.	2.28028	.	62.1546	.	2.62366
204	.	39.8284	.	2.97824	.	62.5099	.	3.38839
205	.	40.1474	.	3.67689	.	62.8275	.	4.12805
206	.	40.4310	.	4.36299	.	63.1139	.	4.84149
207	.	40.6861	.	5.03040	.	63.3755	.	5.52744
208	.	40.9185	.	5.67548	.	63.6174	.	6.18564
209	.	41.1330	.	6.29673	.	63.8435	.	6.81655
210	.	41.3332	.	6.89383	.	64.0572	.	7.42114

The OUT= data set produced by PROC STATESPACE contains the VAR and ID statement variables. In addition, for each VAR statement variable, the OUT= data set contains the variables FOR_i , RES_i , and STD_i . These variables contain the predicted values, residuals, and forecast standard errors for the i th variable in the VAR statement list. In this case, X is listed first in the VAR statement, so FOR1 contains the forecasts of X, while FOR2 contains the forecasts of Y.

The following statements plot the forecasts and actuals for the series.

```
proc sgplot data=out noautolegend;
  where t > 150;
  series x=t y=for1 / markers
    markerattrs=(symbol=circle color=blue)
    lineattrs=(pattern=solid color=blue);
  series x=t y=for2 / markers
    markerattrs=(symbol=circle color=blue)
    lineattrs=(pattern=solid color=blue);
  series x=t y=x / markers
    markerattrs=(symbol=circle color=red)
    lineattrs=(pattern=solid color=red);
  series x=t y=y / markers
    markerattrs=(symbol=circle color=red)
    lineattrs=(pattern=solid color=red);
  refline 200.5 / axis=x;
run;
```

The forecast plot is shown in [Figure 28.8](#). The last 50 observations are also plotted to provide context, and a reference line is drawn between the historical and forecast periods.

Figure 28.8 Plot of Forecasts

Controlling Printed Output

By default, the STATESPACE procedure produces a large amount of printed output. The NOPRINT option suppresses all printed output. You can suppress the printed output for the autoregressive model selection process with the PRINTOUT=NONE option. The descriptive statistics and state space model estimation output are still printed when PRINTOUT=NONE is specified. You can produce more detailed output with the PRINTOUT=LONG option and by specifying the printing control options CANCELL, COVB, and PRINT.

Specifying the State Space Model

Instead of allowing the STATESPACE procedure to select the model automatically, you can use FORM and RESTRICT statements to specify a state space model.

Specifying the State Vector

Use the FORM statement to control the form of the state vector. You can use this feature to force PROC STATESPACE to estimate and forecast a model different from the model it would select automatically. You can also use this feature to reestimate the automatically selected model (possibly with restrictions) without repeating the canonical correlation analysis.

The FORM statement specifies the number of lags of each variable to include in the state vector. For example, the statement FORM X 3; forces the state vector to include $x_{t|t}$, $x_{t+1|t}$, and $x_{t+2|t}$. The following statement specifies the state vector $(x_{t|t}, y_{t|t}, x_{t+1|t})$, which is the same state vector selected in the preceding example:

```
form x 2 y 1;
```

You can specify the form for only some of the variables and allow PROC STATESPACE to select the form for the other variables. If only some of the variables are specified in the FORM statement, canonical correlation analysis is used to determine the number of lags included in the state vector for the remaining variables not specified by the FORM statement. If the FORM statement includes specifications for all the variables listed in the VAR statement, the state vector is completely defined and the canonical correlation analysis is not performed.

Restricting the F and G matrices

After you know the form of the state vector, you can use the RESTRICT statement to fix some parameters in the **F** and **G** matrices to specified values. One use of this feature is to remove insignificant parameters by restricting them to 0.

In the introductory example shown in the preceding section, the F[2,3] parameter is not significant. (The parameters estimation output shown in [Figure 28.6](#) gives the t statistic for F[2,3] as -0.06 . F[3,3] and F[3,1] also have low significance with $t < 2$.)

The following statements reestimate this model with F[2,3] restricted to 0. The FORM statement is used to specify the state vector and thus bypass the canonical correlation analysis.

```
proc statespace data=in out=out lead=10;
  var x(1) y(1);
  id t;
  form x 2 y 1;
  restrict f(2,3)=0;
run;
```

The final estimates produced by these statements are shown in [Figure 28.10](#).

Figure 28.9 Results Using RESTRICT Statement

The STATESPACE Procedure		
Selected Statespace Form and Fitted Model		
State Vector		
$\mathbf{x}(T;T)$	$\mathbf{y}(T;T)$	$\mathbf{x}(T+1;T)$
Estimate of Transition Matrix		
0	0	1
0.290051	0.467468	0
0.227051	0.226139	0.26436
Input Matrix for Innovation		
1	0	
0	1	
0.256826	0.202022	
Variance Matrix for Innovation		
0.945175	0.100696	
0.100696	1.014733	

Figure 28.10 Restricted Parameter Estimates

Parameter Estimates			
Parameter	Estimate	Standard Error	t Value
F(2,1)	0.290051	0.063904	4.54
F(2,2)	0.467468	0.060430	7.74
F(3,1)	0.227051	0.125221	1.81
F(3,2)	0.226139	0.111711	2.02
F(3,3)	0.264360	0.299537	0.88
G(3,1)	0.256826	0.070994	3.62
G(3,2)	0.202022	0.068507	2.95

Syntax: STATESPACE Procedure

The STATESPACE procedure uses the following statements:

PROC STATESPACE *options* ;
BY *variable* ... ;
FORM *variable value* ... ;
ID *variable* ;
INITIAL *F (row,column)=value ... G(row,column)=value ...* ;
RESTRICT *F (row,column)=value ... G (row,column)=value ...* ;
VAR *variable (difference, difference, ...) ...* ;

Functional Summary

Table 28.1 summarizes the statements and options used by PROC STATESPACE.

Table 28.1 STATESPACE Functional Summary

Description	Statement	Option
Input Data Set Options		
specify the input data set	PROC STATESPACE	DATA=
prevent subtraction of sample mean	PROC STATESPACE	NOCENTER
specify the ID variable	ID	
specify the observed series and differencing	VAR	
Options for Autoregressive Estimates		
specify the maximum order	PROC STATESPACE	ARMAX=
specify maximum lag for autocovariances	PROC STATESPACE	LAGMAX=
output only minimum AIC model	PROC STATESPACE	MINIC
specify the amount of detail printed	PROC STATESPACE	PRINTOUT=
write preliminary AR models to a data set	PROC STATESPACE	OUTAR=
Options for Canonical Correlation Analysis		
print the sequence of canonical correlations	PROC STATESPACE	CANCORR
specify upper limit of dimension of state vector	PROC STATESPACE	DIMMAX=
specify the minimum number of lags	PROC STATESPACE	PASTMIN=
specify the multiplier of the degrees of freedom	PROC STATESPACE	SIGCORR=
Options for State Space Model Estimation		
specify starting values	INITIAL	
print covariance matrix of parameter estimates	PROC STATESPACE	COVB
specify the convergence criterion	PROC STATESPACE	DETTOL=
specify the convergence criterion	PROC STATESPACE	PARMTOL=
print the details of the iterations	PROC STATESPACE	ITPRINT
specify an upper limit of the number of lags	PROC STATESPACE	KLAG=
specify maximum number of iterations allowed	PROC STATESPACE	MAXIT=
suppress the final estimation	PROC STATESPACE	NOEST

Description	Statement	Option
write the state space model parameter estimates to an output data set	PROC STATESPACE	OUTMODEL=
use conditional least squares for final estimates	PROC STATESPACE	RESIDEST
specify criterion for testing for singularity	PROC STATESPACE	SINGULAR=
Options for Forecasting		
start forecasting before end of the input data	PROC STATESPACE	BACK=
specify the time interval between observations	PROC STATESPACE	INTERVAL=
specify multiple periods in the time series	PROC STATESPACE	INTPER=
specify how many periods to forecast	PROC STATESPACE	LEAD=
specify the output data set for forecasts	PROC STATESPACE	OUT=
print forecasts	PROC STATESPACE	PRINT
Options to Specify the State Space Model		
specify the state vector	FORM	
specify the parameter values	RESTRICT	
BY Groups		
specify BY-group processing	BY	
Printing		
suppresses all printed output	NOPRINT	

PROC STATESPACE Statement

PROC STATESPACE *options* ;

The following options can be specified in the PROC STATESPACE statement.

Printing Options

NOPRINT

suppresses all printed output.

Input Data Options

DATA=SAS-data-set

specifies the name of the SAS data set to be used by the procedure. If the DATA= option is omitted, the most recently created SAS data set is used.

LAGMAX=k

specifies the number of lags for which the sample autocovariance matrix is computed. The LAG-

MAX= option controls the number of lags printed in the schematic representation of the autocorrelations.

The sample autocovariance matrix of lag i , denoted as \mathbf{C}_i , is computed as

$$\mathbf{C}_i = \frac{1}{N-1} \sum_{t=1+i}^N \mathbf{x}_t \mathbf{x}_{t-i}'$$

where \mathbf{x}_t is the differenced and centered data and N is the number of observations. (If the NOCENTER option is specified, 1 is not subtracted from N .) LAGMAX= k specifies that \mathbf{C}_0 through \mathbf{C}_k are computed. The default is LAGMAX=10.

NOCENTER

prevents subtraction of the sample mean from the input series (after any specified differencing) before the analysis.

Options for Preliminary Autoregressive Models

ARMAX= n

specifies the maximum order of the preliminary autoregressive models. The ARMAX= option controls the autoregressive orders for which information criteria are printed, and controls the number of lags printed in the schematic representation of partial autocorrelations. The default is ARMAX=10. See the section “[Preliminary Autoregressive Models](#)” on page 1851 for details.

MINIC

writes to the OUTAR= data set only the preliminary Yule-Walker estimates for the VAR model that produces the minimum AIC. See the section “[OUTAR= Data Set](#)” on page 1863 for details.

OUTAR=SAS-data-set

writes the Yule-Walker estimates of the preliminary autoregressive models to a SAS data set. See the section “[OUTAR= Data Set](#)” on page 1863 for details.

PRINTOUT=SHORT | LONG | NONE

determines the amount of detail printed. PRINTOUT=LONG prints the lagged covariance matrices, the partial autoregressive matrices, and estimates of the residual covariance matrices from the sequence of autoregressive models. PRINTOUT=NONE suppresses the output for the preliminary autoregressive models. The descriptive statistics and state space model estimation output are still printed when PRINTOUT=NONE is specified. PRINTOUT=SHORT is the default.

Canonical Correlation Analysis Options

CANCORR

prints the canonical correlations and information criterion for each candidate state vector considered. See the section “[Canonical Correlation Analysis Options](#)” on page 1845 for details.

DIMMAX= n

specifies the upper limit to the dimension of the state vector. The DIMMAX= option can be used to limit the size of the model selected. The default is DIMMAX=10.

PASTMIN=*n*

specifies the minimum number of lags to include in the canonical correlation analysis. The default is PASTMIN=0. See the section “[Canonical Correlation Analysis Options](#)” on page 1845 for details.

SIGCORR=*value*

specifies the multiplier of the degrees of freedom for the penalty term in the information criterion used to select the state space form. The default is SIGCORR=2. The larger the value of the SIGCORR= option, the smaller the state vector tends to be. Hence, a large value causes a simpler model to be fit. See the section “[Canonical Correlation Analysis Options](#)” on page 1845 for details.

State Space Model Estimation Options

COVB

prints the inverse of the observed information matrix for the parameter estimates. This matrix is an estimate of the covariance matrix for the parameter estimates.

DETTOL=*value*

specifies the convergence criterion. The DETTOL= and PARMTOL= option values are used together to test for convergence of the estimation process. If, during an iteration, the relative change of the parameter estimates is less than the PARMTOL= value and the relative change of the determinant of the innovation variance matrix is less than the DETTOL= value, then iteration ceases and the current estimates are accepted. The default is DETTOL=1E-5.

ITPRINT

prints the iterations during the estimation process.

KLAG=*n*

sets an upper limit for the number of lags of the sample autocovariance matrix used in computing the approximate likelihood function. If the data have a strong moving average character, a larger KLAG= value might be necessary to obtain good estimates. The default is KLAG=15. See the section “[Parameter Estimation](#)” on page 1857 for details.

MAXIT=*n*

sets an upper limit to the number of iterations in the maximum likelihood or conditional least squares estimation. The default is MAXIT=50.

NOEST

suppresses the final maximum likelihood estimation of the selected model.

OUTMODEL=*SAS-data-set*

writes the parameter estimates and their standard errors to a SAS data set. See the section “[OUTMODEL= Data Set](#)” on page 1864 for details.

PARMTOL=*value*

specifies the convergence criterion. The DETTOL= and PARMTOL= option values are used together to test for convergence of the estimation process. If, during an iteration, the relative change of the parameter estimates is less than the PARMTOL= value and the relative change of the determinant of the innovation variance matrix is less than the DETTOL= value, then iteration ceases and the current estimates are accepted. The default is PARMTOL=0.001.

RESIDEST

computes the final estimates by using conditional least squares on the raw data. This type of estimation might be more stable than the default maximum likelihood method but is usually more computationally expensive. See the section “[Parameter Estimation](#)” on page 1857 for details about the conditional least squares method.

SINGULAR=value

specifies the criterion for testing for singularity of a matrix. A matrix is declared singular if a scaled pivot is less than the SINGULAR= value when sweeping the matrix. The default is SINGULAR=1E-7.

Forecasting Options

BACK=n

starts forecasting n periods before the end of the input data. The BACK= option value must not be greater than the number of observations. The default is BACK=0.

INTERVAL=interval

specifies the time interval between observations. The INTERVAL= value is used in conjunction with the ID variable to check that the input data are in order and have no missing periods. The INTERVAL= option is also used to extrapolate the ID values past the end of the input data. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for details about the INTERVAL= values allowed.

INTPER=n

specifies that each input observation corresponds to n time periods. For example, the options INTERVAL=MONTH and INTPER=2 specify bimonthly data and are equivalent to specifying INTERVAL=MONTH2. If the INTERVAL= option is not specified, the INTPER= option controls the increment used to generate ID values for the forecast observations. The default is INTPER=1.

LEAD=n

specifies how many forecast observations are produced. The forecasts start at the point set by the BACK= option. The default is LEAD=0, which produces no forecasts.

OUT=SAS-data-set

writes the residuals, actual values, forecasts, and forecast standard errors to a SAS data set. See the section “[OUT= Data Set](#)” on page 1862 for details.

PRINT

prints the forecasts.

BY Statement

BY *variable ...* ;

A BY statement can be used with the STATESPACE procedure to obtain separate analyses on observations in groups defined by the BY variables.

FORM Statement

FORM *variable value* ... ;

The FORM statement specifies the number of times a variable is included in the state vector. Values can be specified for any variable listed in the VAR statement. If a value is specified for each variable in the VAR statement, the state vector for the state space model is entirely specified, and automatic selection of the state space model is not performed.

The FORM statement forces the state vector, \mathbf{z}_t , to contain a specific variable a given number of times. For example, if Y is one of the variables in \mathbf{x}_t , then the statement

form y 3;

forces the state vector to contain Y_t , $Y_{t+1|t}$, and $Y_{t+2|t}$, possibly along with other variables.

The following statements illustrate the use of the FORM statement:

```
proc statespace data=in;
  var x y;
  form x 3 y 2;
run;
```

These statements fit a state space model with the following state vector:

$$\mathbf{z}_t = \begin{bmatrix} x_{t|t} \\ y_{t|t} \\ x_{t+1|t} \\ y_{t+1|t} \\ x_{t+2|t} \end{bmatrix}$$

ID Statement

ID *variable* ;

The ID statement specifies a variable that identifies observations in the input data set. The variable specified in the ID statement is included in the OUT= data set. The values of the ID variable are extrapolated for the forecast observations based on the values of the INTERVAL= and INTPER= options.

INITIAL Statement

INITIAL *F (row,column)= value ... G(row, column)= value ... ;*

The INITIAL statement gives initial values to the specified elements of the **F** and **G** matrices. These initial values are used as starting values for the iterative estimation.

Parts of the **F** and **G** matrices represent fixed structural identities. If an element specified is a fixed structural element instead of a free parameter, the corresponding initialization is ignored.

The following is an example of an INITIAL statement:

```
initial f(3,2)=0 g(4,1)=0 g(5,1)=0;
```

RESTRICT Statement

RESTRICT *F(row,column)= value ... G(row,column)= value ... ;*

The RESTRICT statement restricts the specified elements of the **F** and **G** matrices to the specified values.

To use the restrict statement, you need to know the form of the model. Either specify the form of the model with the FORM statement, or do a preliminary run (perhaps with the NOEST option) to find the form of the model that PROC STATESPACE selects for the data.

The following is an example of a RESTRICT statement:

```
restrict f(3,2)=0 g(4,1)=0 g(5,1)=0 ;
```

Parts of the **F** and **G** matrices represent fixed structural identities. If a restriction is specified for an element that is a fixed structural element instead of a free parameter, the restriction is ignored.

VAR Statement

VAR *variable (difference, difference, ...) ... ;*

The VAR statement specifies the variables in the input data set to model and forecast. The VAR statement also specifies differencing of the input variables. The VAR statement is required.

Differencing is specified by following the variable name with a list of difference periods separated by commas. See the section “[Stationarity and Differencing](#)” on page 1850 for more information about differencing of input variables.

The order in which variables are listed in the VAR statement controls the order in which variables are included in the state vector. Usually, potential inputs should be listed before potential outputs.

For example, assuming the input data are monthly, the following VAR statement specifies modeling and forecasting of the one period and seasonal second difference of X and Y:

```
var x(1,12) y(1,12);
```

In this example, the vector time series analyzed is

$$\mathbf{x}_t = \begin{bmatrix} (1 - B)(1 - B^{12})X_t - \bar{x} \\ (1 - B)(1 - B^{12})Y_t - \bar{y} \end{bmatrix}$$

where B represents the back shift operator and \bar{x} and \bar{y} represent the means of the differenced series. If the NOCENTER option is specified, the mean differences are not subtracted.

Details: STATESPACE Procedure

Missing Values

The STATESPACE procedure does not support missing values. The procedure uses the first contiguous group of observations with no missing values for any of the VAR statement variables. Observations at the beginning of the data set with missing values for any VAR statement variable are not used or included in the output data set.

Stationarity and Differencing

The state space model used by the STATESPACE procedure assumes that the time series are stationary. Hence, the data should be checked for stationarity. One way to check for stationarity is to plot the series. A graph of series over time can show a time trend or variability changes.

You can also check stationarity by using the sample autocorrelation functions displayed by the ARIMA procedure. The autocorrelation functions of nonstationary series tend to decay slowly. See Chapter 7, “[The ARIMA Procedure](#),” for more information.

Another alternative is to use the STATIONARITY= option in the IDENTIFY statement in PROC ARIMA to apply Dickey-Fuller tests for unit roots in the time series. See Chapter 7, “[The ARIMA Procedure](#),” for more information about Dickey-Fuller unit root tests.

The most popular way to transform a nonstationary series to stationarity is by differencing. Differencing of the time series is specified in the VAR statement. For example, to take a simple first difference of the series X , use this statement:

```
var x(1);
```

In this example, the change in X from one period to the next is analyzed. When the series has a seasonal pattern, differencing at a period equal to the length of the seasonal cycle can be desirable. For example, suppose the variable X is measured quarterly and shows a seasonal cycle over the year. You can use the following statement to analyze the series of changes from the same quarter in the previous year:

```
var x(4);
```

To difference twice, add another differencing period to the list. For example, the following statement analyzes the series of second differences $(X_t - X_{t-1}) - (X_{t-1} - X_{t-2}) = X_t - 2X_{t-1} + X_{t-2}$:

```
var x(1,1);
```

The following statement analyzes the seasonal second difference series:

```
var x(1,4);
```

The series that is being modeled is the 1-period difference of the 4-period difference:

$$(X_t - X_{t-4}) - (X_{t-1} - X_{t-5}) = X_t - X_{t-1} - X_{t-4} + X_{t-5}.$$

Another way to obtain stationary series is to use a regression on time to detrend the data. If the time series has a deterministic linear trend, regressing the series on time produces residuals that should be stationary. The following statements write residuals of X and Y to the variable RX and RY in the output data set DETREND.

```
data a;
  set a;
  t=_n_;
run;

proc reg data=a;
  model x y = t;
  output out=detrend r=rx ry;
run;
```

You then use PROC STATESPACE to forecast the detrended series RX and RY. A disadvantage of this method is that you need to add the trend back to the forecast series in an additional step. A more serious disadvantage of the detrending method is that it assumes a deterministic trend. In practice, most time series appear to have a stochastic rather than a deterministic trend. Differencing is a more flexible and often more appropriate method.

There are several other methods to handle nonstationary time series. For more information and examples, see Brockwell and Davis (1991).

Preliminary Autoregressive Models

After computing the sample autocovariance matrices, PROC STATESPACE fits a sequence of vector autoregressive models. These preliminary autoregressive models are used to estimate the autoregressive order of the process and limit the order of the autocovariances considered in the state vector selection process.

Yule-Walker Equations for Forward and Backward Models

Unlike a univariate autoregressive model, a multivariate autoregressive model has different forms, depending on whether the present observation is being predicted from the past observations or from the future observations.

Let \mathbf{x}_t be the r -component stationary time series given by the VAR statement after differencing and subtracting the vector of sample means. (If the NOCENTER option is specified, the mean is not subtracted.) Let n be the number of observations of \mathbf{x}_t from the input data set.

Let \mathbf{e}_t be a vector white noise sequence with mean vector $\mathbf{0}$ and variance matrix Σ_p , and let \mathbf{n}_t be a vector white noise sequence with mean vector $\mathbf{0}$ and variance matrix Ω_p . Let p be the order of the vector autoregressive model for \mathbf{x}_t .

The forward autoregressive form based on the past observations is written as follows:

$$\mathbf{x}_t = \sum_{i=1}^p \Phi_i^p \mathbf{x}_{t-i} + \mathbf{e}_t$$

The backward autoregressive form based on the future observations is written as follows:

$$\mathbf{x}_t = \sum_{i=1}^p \Psi_i^p \mathbf{x}_{t+i} + \mathbf{n}_t$$

Letting E denote the expected value operator, the autocovariance sequence for the \mathbf{x}_t series, Γ_i , is

$$\Gamma_i = E\mathbf{x}_t \mathbf{x}_{t-i}'$$

The Yule-Walker equations for the autoregressive model that matches the first p elements of the autocovariance sequence are

$$\begin{bmatrix} \Gamma_0 & \Gamma_1 & \cdots & \Gamma_{p-1} \\ \Gamma_1' & \Gamma_0 & \cdots & \Gamma_{p-2} \\ \vdots & \vdots & \ddots & \vdots \\ \Gamma_{p-1}' & \Gamma_{p-2}' & \cdots & \Gamma_0 \end{bmatrix} \begin{bmatrix} \Phi_1^p \\ \Phi_2^p \\ \vdots \\ \Phi_p^p \end{bmatrix} = \begin{bmatrix} \Gamma_1 \\ \Gamma_2 \\ \vdots \\ \Gamma_p \end{bmatrix}$$

and

$$\begin{bmatrix} \Gamma_0 & \Gamma_1' & \cdots & \Gamma_{p-1}' \\ \Gamma_1 & \Gamma_0 & \cdots & \Gamma_{p-2}' \\ \vdots & \vdots & \ddots & \vdots \\ \Gamma_{p-1} & \Gamma_{p-2} & \cdots & \Gamma_0 \end{bmatrix} \begin{bmatrix} \Psi_1^p \\ \Psi_2^p \\ \vdots \\ \Psi_p^p \end{bmatrix} = \begin{bmatrix} \Gamma_1' \\ \Gamma_2' \\ \vdots \\ \Gamma_p' \end{bmatrix}$$

Here Φ_i^p are the coefficient matrices for the past observation form of the vector autoregressive model, and Ψ_i^p are the coefficient matrices for the future observation form. More information about the Yule-Walker equations in the multivariate setting can be found in Whittle (1963) and Ansley and Newbold (1979).

The innovation variance matrices for the two forms can be written as follows:

$$\Sigma_p = \Gamma_0 - \sum_{i=1}^p \Phi_i^p \Gamma_i'$$

$$\Omega_p = \Gamma_0 - \sum_{i=1}^p \Psi_i^p \Gamma_i$$

The autoregressive models are fit to the data by using the preceding Yule-Walker equations with Γ_i replaced by the sample covariance sequence \mathbf{C}_i . The covariance matrices are calculated as

$$\mathbf{C}_i = \frac{1}{N-1} \sum_{t=i+1}^N \mathbf{x}_t \mathbf{x}_{t-i}'$$

Let $\hat{\Phi}_p$, $\hat{\Psi}_p$, $\hat{\Sigma}_p$, and $\hat{\Omega}_p$ represent the Yule-Walker estimates of Φ_p , Ψ_p , Σ_p , and Ω_p , respectively. These matrices are written to an output data set when the OUTAR= option is specified.

When the PRINTOUT=LONG option is specified, the sequence of matrices $\hat{\Sigma}_p$ and the corresponding correlation matrices are printed. The sequence of matrices $\hat{\Sigma}_p$ is used to compute Akaike information criteria for selection of the autoregressive order of the process.

Akaike Information Criterion

The Akaike information criterion (AIC) is defined as $-2(\text{maximum of log likelihood}) + 2(\text{number of parameters})$. Since the vector autoregressive models are estimates from the Yule-Walker equations, not by maximum likelihood, the exact likelihood values are not available for computing the AIC. However, for the vector autoregressive model the maximum of the log likelihood can be approximated as

$$\ln(L) \approx -\frac{n}{2} \ln(|\hat{\Sigma}_p|)$$

Thus, the AIC for the order p model is computed as

$$AIC_p = n \ln(|\hat{\Sigma}_p|) + 2pr^2$$

You can use the printed AIC array to compute a likelihood ratio test of the autoregressive order. The log-likelihood ratio test statistic for testing the order p model against the order $p-1$ model is

$$-n \ln(|\hat{\Sigma}_p|) + n \ln(|\hat{\Sigma}_{p-1}|)$$

This quantity is asymptotically distributed as a χ^2 with r^2 degrees of freedom if the series is autoregressive of order $p-1$. It can be computed from the AIC array as

$$AIC_{p-1} - AIC_p + 2r^2$$

You can evaluate the significance of these test statistics with the PROBCHI function in a SAS DATA step or with a χ^2 table.

Determining the Autoregressive Order

Although the autoregressive models can be used for prediction, their primary value is to aid in the selection of a suitable portion of the sample covariance matrix for use in computing canonical correlations. If the multivariate time series \mathbf{x}_t is of autoregressive order p , then the vector of past values to lag p is considered to contain essentially all the information relevant for prediction of future values of the time series.

By default, PROC STATESPACE selects the order p that produces the autoregressive model with the smallest AIC_p . If the value p for the minimum AIC_p is less than the value of the PASTMIN= option, then p is set to the PASTMIN= value. Alternatively, you can use the ARMAX= and PASTMIN= options to force PROC STATESPACE to use an order you select.

Significance Limits for Partial Autocorrelations

The STATESPACE procedure prints a schematic representation of the partial autocorrelation matrices that indicates which partial autocorrelations are significantly greater than or significantly less than 0. Figure 28.11 shows an example of this table.

Figure 28.11 Significant Partial Autocorrelations

Schematic Representation of Partial Autocorrelations										
Name/Lag	1	2	3	4	5	6	7	8	9	10
x	++	+.
y	++
+ is > 2*std error, - is < -2*std error, . is between										

The partial autocorrelations are from the sample partial autoregressive matrices $\hat{\Phi}_p^p$. The standard errors used for the significance limits of the partial autocorrelations are computed from the sequence of matrices Σ_p and Ω_p .

Under the assumption that the observed series arises from an autoregressive process of order $p - 1$, the p th sample partial autoregressive matrix $\hat{\Phi}_p^p$ has an asymptotic variance matrix $\frac{1}{n}\Omega_p^{-1} \otimes \Sigma_p$.

The significance limits for $\hat{\Phi}_p^p$ used in the schematic plot of the sample partial autoregressive sequence are derived by replacing Ω_p and Σ_p with their sample estimators to produce the variance estimate, as follows:

$$\widehat{Var}(\hat{\Phi}_p^p) = \left(\frac{1}{n - rp} \right) \hat{\Omega}_p^{-1} \otimes \hat{\Sigma}_p$$

Canonical Correlation Analysis

Given the order p , let \mathbf{p}_t be the vector of current and past values relevant to prediction of \mathbf{x}_{t+1} :

$$\mathbf{p}_t = (\mathbf{x}'_t, \mathbf{x}'_{t-1}, \dots, \mathbf{x}'_{t-p})'$$

Let \mathbf{f}_t be the vector of current and future values:

$$\mathbf{f}_t = (\mathbf{x}'_t, \mathbf{x}'_{t+1}, \dots, \mathbf{x}'_{t+p})'$$

In the canonical correlation analysis, consider submatrices of the sample covariance matrix of \mathbf{p}_t and \mathbf{f}_t . This covariance matrix, \mathbf{V} , has a block Hankel form:

$$\mathbf{V} = \begin{bmatrix} \mathbf{C}_0 & \mathbf{C}'_1 & \mathbf{C}'_2 & \cdots & \mathbf{C}'_p \\ \mathbf{C}'_1 & \mathbf{C}'_2 & \mathbf{C}'_3 & \cdots & \mathbf{C}'_{p+1} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \mathbf{C}'_p & \mathbf{C}'_{p+1} & \mathbf{C}'_{p+2} & \cdots & \mathbf{C}'_{2p} \end{bmatrix}$$

State Vector Selection Process

The canonical correlation analysis forms a sequence of potential state vectors \mathbf{z}_t^j . Examine a sequence \mathbf{f}_t^j of subvectors of \mathbf{f}_t , form the submatrix \mathbf{V}^j that consists of the rows and columns of \mathbf{V} that correspond to the components of \mathbf{f}_t^j , and compute its canonical correlations.

The smallest canonical correlation of \mathbf{V}^j is then used in the selection of the components of the state vector. The selection process is described in the following discussion. For more details about this process, see Akaike (1976).

In the following discussion, the notation $\mathbf{x}_{t+k|t}$ denotes the wide sense conditional expectation (best linear predictor) of \mathbf{x}_{t+k} , given all \mathbf{x}_s with s less than or equal to t . In the notation $x_{i,t+1}$, the first subscript denotes the i th component of \mathbf{x}_{t+1} .

The initial state vector \mathbf{z}_t^1 is set to \mathbf{x}_t . The sequence \mathbf{f}_t^j is initialized by setting

$$\mathbf{f}_t^1 = (\mathbf{z}_t^{1'}, x_{1,t+1|t})' = (\mathbf{x}_t', x_{1,t+1|t})'$$

That is, start by considering whether to add $x_{1,t+1|t}$ to the initial state vector \mathbf{z}_t^1 .

The procedure forms the submatrix \mathbf{V}^1 that corresponds to \mathbf{f}_t^1 and computes its canonical correlations. Denote the smallest canonical correlation of \mathbf{V}^1 as ρ_{min} . If ρ_{min} is significantly greater than 0, $x_{1,t+1|t}$ is added to the state vector.

If the smallest canonical correlation of \mathbf{V}^1 is not significantly greater than 0, then a linear combination of \mathbf{f}_t^1 is uncorrelated with the past, \mathbf{p}_t . Assuming that the determinant of \mathbf{C}_0 is not 0, (that is, no input series is a constant), you can take the coefficient of $x_{1,t+1|t}$ in this linear combination to be 1. Denote the coefficients of \mathbf{z}_t^1 in this linear combination as ℓ . This gives the relationship:

$$x_{1,t+1|t} = \ell' \mathbf{x}_t$$

Therefore, the current state vector already contains all the past information useful for predicting $x_{1,t+1}$ and any greater leads of $x_{1,t}$. The variable $x_{1,t+1|t}$ is not added to the state vector, nor are any terms $x_{1,t+k|t}$ considered as possible components of the state vector. The variable x_1 is no longer active for state vector selection.

The process described for $x_{1,t+1|t}$ is repeated for the remaining elements of \mathbf{f}_t . The next candidate for inclusion in the state vector is the next component of \mathbf{f}_t that corresponds to an active variable. Components of \mathbf{f}_t that correspond to inactive variables that produced a zero ρ_{min} in a previous step are skipped.

Denote the next candidate as $x_{l,t+k|t}$. The vector \mathbf{f}_t^j is formed from the current state vector and $x_{l,t+k|t}$ as follows:

$$\mathbf{f}_t^j = (\mathbf{z}_t^{j'}, x_{l,t+k|t})'$$

The matrix \mathbf{V}^j is formed from \mathbf{f}_t^j and its canonical correlations are computed. The smallest canonical correlation of \mathbf{V}^j is judged to be either greater than or equal to 0. If it is judged to be greater than 0, $x_{l,t+k|t}$ is added to the state vector. If it is judged to be 0, then a linear combination of \mathbf{f}_t^j is uncorrelated with the \mathbf{p}_t , and the variable x_l is now inactive.

The state vector selection process continues until no active variables remain.

Testing Significance of Canonical Correlations

For each step in the canonical correlation sequence, the significance of the smallest canonical correlation ρ_{min} is judged by an information criterion from Akaike (1976). This information criterion is

$$-n \ln(1 - \rho_{min}^2) - \lambda(r(p + 1) - q + 1)$$

where q is the dimension of \mathbf{f}_t^j at the current step, r is the order of the state vector, p is the order of the vector autoregressive process, and λ is the value of the SIGCORR= option. The default is SIGCORR=2. If this information criterion is less than or equal to 0, ρ_{min} is taken to be 0; otherwise, it is taken to be significantly greater than 0. (Do not confuse this information criterion with the AIC.)

Variables in $\mathbf{x}_{t+p|t}$ are not added in the model, even with positive information criterion, because of the singularity of \mathbf{V} . You can force the consideration of more candidate state variables by increasing the size of the \mathbf{V} matrix by specifying a PASTMIN= option value larger than p .

Printing the Canonical Correlations

To print the details of the canonical correlation analysis process, specify the CANCORR option in the PROC STATESPACE statement. The CANCORR option prints the candidate state vectors, the canonical correlations, and the information criteria for testing the significance of the smallest canonical correlation.

Bartlett's χ^2 and its degrees of freedom are also printed when the CANCORR option is specified. The formula used for Bartlett's χ^2 is

$$\chi^2 = -(n - .5(r(p + 1) - q + 1)) \ln(1 - \rho_{min}^2)$$

with $r(p + 1) - q + 1$ degrees of freedom.

Figure 28.12 shows the output of the CANCORR option for the introductory example shown in the “Getting Started: STATESPACE Procedure” on page 1832.

```
proc statespace data=in out=out lead=10 cancorr;
  var x(1) y(1);
  id t;
run;
```

Figure 28.12 Canonical Correlations Analysis

The STATESPACE Procedure Canonical Correlations Analysis					
$\mathbf{x}(T;T)$	$\mathbf{y}(T;T)$	$\mathbf{x}(T+1;T)$	Information Criterion	Chi Square	DF
1	1	0.237045	3.566167	11.4505	4

New variables are added to the state vector if the information criteria are positive. In this example, $\mathbf{y}_{t+1|t}$ and $\mathbf{x}_{t+2|t}$ are not added to the state space vector because the information criteria for these models are negative.

If the information criterion is nearly 0, then you might want to investigate models that arise if the opposite decision is made regarding ρ_{min} . This investigation can be accomplished by using a FORM statement to specify part or all of the state vector.

Preliminary Estimates of \mathbf{F}

When a candidate variable $x_{l,t+k|t}$ yields a zero ρ_{min} and is not added to the state vector, a linear combination of \mathbf{f}_t^j is uncorrelated with the \mathbf{p}_t . Because of the method used to construct the \mathbf{f}_t^j sequence, the coefficient of $x_{l,t+k|t}$ in \mathbf{l} can be taken as 1. Denote the coefficients of \mathbf{z}_t^j in this linear combination as \mathbf{l} .

This gives the relationship:

$$x_{l,t+k|t} = \mathbf{l}'\mathbf{z}_t^j$$

The vector \mathbf{l} is used as a preliminary estimate of the first r columns of the row of the transition matrix \mathbf{F} corresponding to $x_{l,t+k-1|t}$.

Parameter Estimation

The model is $\mathbf{z}_{t+1} = \mathbf{F}\mathbf{z}_t + \mathbf{G}\mathbf{e}_{t+1}$, where \mathbf{e}_t is a sequence of independent multivariate normal innovations with mean vector $\mathbf{0}$ and variance Σ_{ee} . The observed sequence \mathbf{x}_t composes the first r components of \mathbf{z}_t , and thus $\mathbf{x}_t = \mathbf{H}\mathbf{z}_t$, where \mathbf{H} is the $r \times s$ matrix $[\mathbf{I}_r \ \mathbf{0}]$.

Let \mathbf{E} be the $r \times n$ matrix of innovations:

$$\mathbf{E} = [\mathbf{e}_1 \quad \cdots \quad \mathbf{e}_n]$$

If the number of observations n is reasonably large, the log likelihood L can be approximated up to an additive constant as follows:

$$L = -\frac{n}{2} \ln(|\Sigma_{ee}|) - \frac{1}{2} \text{trace}(\Sigma_{ee}^{-1} \mathbf{E} \mathbf{E}')$$

The elements of Σ_{ee} are taken as free parameters and are estimated as follows:

$$\mathbf{S}_0 = \frac{1}{n} \mathbf{E} \mathbf{E}'$$

Replacing Σ_{ee} by \mathbf{S}_0 in the likelihood equation, the log likelihood, up to an additive constant, is

$$\mathbf{L} = -\frac{n}{2} \ln(|\mathbf{S}_0|)$$

Letting B be the backshift operator, the formal relation between \mathbf{x}_t and \mathbf{e}_t is

$$\begin{aligned} \mathbf{x}_t &= \mathbf{H}(\mathbf{I} - B\mathbf{F})^{-1} \mathbf{G} \mathbf{e}_t \\ \mathbf{e}_t &= (\mathbf{H}(\mathbf{I} - B\mathbf{F})^{-1} \mathbf{G})^{-1} \mathbf{x}_t = \sum_{i=0}^{\infty} \Xi_i \mathbf{x}_{t-i} \end{aligned}$$

Letting \mathbf{C}_i be the i th lagged sample covariance of \mathbf{x}_t and neglecting end effects, the matrix \mathbf{S}_0 is

$$\mathbf{S}_0 = \sum_{i,j=0}^{\infty} \Xi_i \mathbf{C}_{-i+j} \Xi_j'$$

For the computation of \mathbf{S}_0 , the infinite sum is truncated at the value of the KLAG= option. The value of the KLAG= option should be large enough that the sequence Ξ_i is approximately 0 beyond that point.

Let $\boldsymbol{\theta}$ be the vector of free parameters in the \mathbf{F} and \mathbf{G} matrices. The derivative of the log likelihood with respect to the parameter $\boldsymbol{\theta}$ is

$$\frac{\partial L}{\partial \boldsymbol{\theta}} = -\frac{n}{2} \text{trace} \left(\mathbf{S}_0^{-1} \frac{\partial \mathbf{S}_0}{\partial \boldsymbol{\theta}} \right)$$

The second derivative is

$$\frac{\partial^2 L}{\partial \boldsymbol{\theta} \partial \boldsymbol{\theta}'} = \frac{n}{2} \left(\text{trace} \left(\mathbf{S}_0^{-1} \frac{\partial \mathbf{S}_0}{\partial \boldsymbol{\theta}'} \mathbf{S}_0^{-1} \frac{\partial \mathbf{S}_0}{\partial \boldsymbol{\theta}} \right) - \text{trace} \left(\mathbf{S}_0^{-1} \frac{\partial^2 \mathbf{S}_0}{\partial \boldsymbol{\theta} \partial \boldsymbol{\theta}'} \right) \right)$$

Near the maximum, the first term is unimportant and the second term can be approximated to give the following second derivative approximation:

$$\frac{\partial^2 L}{\partial \boldsymbol{\theta} \partial \boldsymbol{\theta}'} \cong -n \text{trace} \left(\mathbf{S}_0^{-1} \frac{\partial \mathbf{E}}{\partial \boldsymbol{\theta}} \frac{\partial \mathbf{E}'}{\partial \boldsymbol{\theta}'} \right)$$

The first derivative matrix and this second derivative matrix approximation are computed from the sample covariance matrix \mathbf{C}_0 and the truncated sequence Ξ_i . The approximate likelihood function is maximized by a modified Newton-Raphson algorithm that employs these derivative matrices.

The matrix \mathbf{S}_0 is used as the estimate of the innovation covariance matrix, Σ_{ee} . The negative of the inverse of the second derivative matrix at the maximum is used as an approximate covariance matrix for the parameter estimates. The standard errors of the parameter estimates printed in the parameter estimates tables are taken from the diagonal of this covariance matrix. The parameter covariance matrix is printed when the COVB option is specified.

If the data are nearly nonstationary, a better estimate of Σ_{ee} and the other parameters can sometimes be obtained by specifying the RESIDEST option. The RESIDEST option estimates the parameters by using conditional least squares instead of maximum likelihood.

The residuals are computed using the state space equation and the sample mean values of the variables in the model as start-up values. The estimate of \mathbf{S}_0 is then computed using the residuals from the i th observation on, where i is the maximum number of times any variable occurs in the state vector. A multivariate Gauss-Marquardt algorithm is used to minimize $|\mathbf{S}_0|$. See Harvey (1981a) for a further description of this method.

Forecasting

Given estimates of \mathbf{F} , \mathbf{G} , and Σ_{ee} , forecasts of \mathbf{x}_t are computed from the conditional expectation of \mathbf{z}_t .

In forecasting, the parameters \mathbf{F} , \mathbf{G} , and Σ_{ee} are replaced with the estimates or by values specified in the RESTRICT statement. One-step-ahead forecasting is performed for the observation \mathbf{x}_t , where $t \leq n - b$. Here n is the number of observations and b is the value of the BACK= option. For the observation \mathbf{x}_t , where $t > n - b$, m -step-ahead forecasting is performed for $m = t - n + b$. The forecasts are generated recursively with the initial condition $\mathbf{z}_0 = \mathbf{0}$.

The m -step-ahead forecast of \mathbf{z}_{t+m} is $\mathbf{z}_{t+m|t}$, where $\mathbf{z}_{t+m|t}$ denotes the conditional expectation of \mathbf{z}_{t+m} given the information available at time t . The m -step-ahead forecast of \mathbf{x}_{t+m} is $\mathbf{x}_{t+m|t} = \mathbf{H}\mathbf{z}_{t+m|t}$, where the matrix $\mathbf{H} = [\mathbf{I}_r \mathbf{0}]$.

Let $\Psi_i = \mathbf{F}^i \mathbf{G}$. Note that the last $s - r$ elements of \mathbf{z}_t consist of the elements of $\mathbf{x}_{u|t}$ for $u > t$.

The state vector \mathbf{z}_{t+m} can be represented as

$$\mathbf{z}_{t+m} = \mathbf{F}^m \mathbf{z}_t + \sum_{i=0}^{m-1} \Psi_i \mathbf{e}_{t+m-i}$$

Since $\mathbf{e}_{t+i|t} = \mathbf{0}$ for $i > 0$, the m -step-ahead forecast $\mathbf{z}_{t+m|t}$ is

$$\mathbf{z}_{t+m|t} = \mathbf{F}^m \mathbf{z}_t = \mathbf{F} \mathbf{z}_{t+m-1|t}$$

Therefore, the m -step-ahead forecast of \mathbf{x}_{t+m} is

$$\mathbf{x}_{t+m|t} = \mathbf{H} \mathbf{z}_{t+m|t}$$

The m -step-ahead forecast error is

$$\mathbf{z}_{t+m} - \mathbf{z}_{t+m|t} = \sum_{i=0}^{m-1} \Psi_i \mathbf{e}_{t+m-i}$$

The variance of the m -step-ahead forecast error is

$$\mathbf{V}_{z,m} = \sum_{i=0}^{m-1} \Psi_i \Sigma_{ee} \Psi_i'$$

Letting $\mathbf{V}_{z,0} = \mathbf{0}$, the variance of the m -step-ahead forecast error of \mathbf{z}_{t+m} , $\mathbf{V}_{z,m}$, can be computed recursively as follows:

$$\mathbf{V}_{z,m} = \mathbf{V}_{z,m-1} + \Psi_{m-1} \Sigma_{ee} \Psi_{m-1}'$$

The variance of the m -step-ahead forecast error of \mathbf{x}_{t+m} is the $r \times r$ left upper submatrix of $\mathbf{V}_{z,m}$; that is,

$$\mathbf{V}_{x,m} = \mathbf{H} \mathbf{V}_{z,m} \mathbf{H}'$$

Unless the NOCENTER option is specified, the sample mean vector is added to the forecast. When differencing is specified, the forecasts $\mathbf{x}_{t+m|t}$ plus the sample mean vector are integrated back to produce forecasts for the original series.

Let \mathbf{y}_t be the original series specified by the VAR statement, with some 0 values appended that correspond to the unobserved past observations. Let B be the backshift operator, and let $\Delta(B)$ be the $s \times s$ matrix polynomial in the backshift operator that corresponds to the differencing specified by the VAR statement. The off-diagonal elements of Δ_i are 0. Note that $\Delta_0 = \mathbf{I}_s$, where \mathbf{I}_s is the $s \times s$ identity matrix. Then $\mathbf{z}_t = \Delta(B)\mathbf{y}_t$.

This gives the relationship

$$\mathbf{y}_t = \Delta^{-1}(B)\mathbf{z}_t = \sum_{i=0}^{\infty} \Lambda_i \mathbf{z}_{t-i}$$

where $\Delta^{-1}(B) = \sum_{i=0}^{\infty} \Lambda_i B^i$ and $\Lambda_0 = \mathbf{I}_s$.

The m -step-ahead forecast of \mathbf{y}_{t+m} is

$$\mathbf{y}_{t+m|t} = \sum_{i=0}^{m-1} \Lambda_i \mathbf{z}_{t+m-i|t} + \sum_{i=m}^{\infty} \Lambda_i \mathbf{z}_{t+m-i}$$

The m -step-ahead forecast error of \mathbf{y}_{t+m} is

$$\sum_{i=0}^{m-1} \Lambda_i (\mathbf{z}_{t+m-i} - \mathbf{z}_{t+m-i|t}) = \sum_{i=0}^{m-1} \left(\sum_{u=0}^i \Lambda_u \Psi_{i-u} \right) \mathbf{e}_{t+m-i}$$

Letting $\mathbf{V}_{y,0} = \mathbf{0}$, the variance of the m -step-ahead forecast error of \mathbf{y}_{t+m} , $\mathbf{V}_{y,m}$, is

$$\begin{aligned}\mathbf{V}_{y,m} &= \sum_{i=0}^{m-1} \left(\sum_{u=0}^i \Lambda_u \Psi_{i-u} \right) \Sigma_{ee} \left(\sum_{u=0}^i \Lambda_u \Psi_{i-u} \right)' \\ &= \mathbf{V}_{y,m-1} + \left(\sum_{u=0}^{m-1} \Lambda_u \Psi_{m-1-u} \right) \Sigma_{ee} \left(\sum_{u=0}^{m-1} \Lambda_u \Psi_{m-1-u} \right)'\end{aligned}$$

Relation of ARMA and State Space Forms

Every state space model has an ARMA representation, and conversely every ARMA model has a state space representation. This section discusses this equivalence. The following material is adapted from Akaike (1974), where there is a more complete discussion. Pham-Dinh-Tuan (1978) also contains a discussion of this material.

Suppose you are given the following ARMA model:

$$\Phi(B)\mathbf{x}_t = \Theta(B)\mathbf{e}_t$$

or, in more detail,

$$\mathbf{x}_t - \Phi_1 \mathbf{x}_{t-1} - \cdots - \Phi_p \mathbf{x}_{t-p} = \mathbf{e}_t + \Theta_1 \mathbf{e}_{t-1} + \cdots + \Theta_q \mathbf{e}_{t-q} \quad (1)$$

where \mathbf{e}_t is a sequence of independent multivariate normal random vectors with mean $\mathbf{0}$ and variance matrix Σ_{ee} , B is the backshift operator ($B\mathbf{x}_t = \mathbf{x}_{t-1}$), $\Phi(B)$ and $\Theta(B)$ are matrix polynomials in B , and \mathbf{x}_t is the observed process.

If the roots of the determinantal equation $|\Phi(B)| = 0$ are outside the unit circle in the complex plane, the model can also be written as

$$\mathbf{x}_t = \Phi^{-1}(B)\Theta(B)\mathbf{e}_t = \sum_{i=0}^{\infty} \Psi_i \mathbf{e}_{t-i}$$

The Ψ_i matrices are known as the impulse response matrices and can be computed as $\Phi^{-1}(B)\Theta(B)$.

You can assume $p > q$ since, if this is not initially true, you can add more terms Φ_i that are identically 0 without changing the model.

To write this set of equations in a state space form, proceed as follows. Let $\mathbf{x}_{t+i|t}$ be the conditional expectation of \mathbf{x}_{t+i} given \mathbf{x}_w for $w \leq t$. The following relations hold:

$$\begin{aligned}\mathbf{x}_{t+i|t} &= \sum_{j=i}^{\infty} \Psi_j \mathbf{e}_{t+i-j} \\ \mathbf{x}_{t+i|t+1} &= \mathbf{x}_{t+i|t} + \Psi_{i-1} \mathbf{e}_{t+1}\end{aligned}$$

However, from equation (1) you can derive the following relationship:

$$\mathbf{x}_{t+p|t} = \Phi_1 \mathbf{x}_{t+p-1|t} + \cdots + \Phi_p \mathbf{x}_t \quad (2)$$

Hence, when $i = p$, you can substitute for $\mathbf{x}_{t+p|t}$ in the right-hand side of equation (2) and close the system of equations.

This substitution results in the following model in the state space form $\mathbf{z}_{t+1} = \mathbf{F}\mathbf{z}_t + \mathbf{G}\mathbf{e}_{t+1}$:

$$\begin{bmatrix} \mathbf{x}_{t+1} \\ \mathbf{x}_{t+2|t+1} \\ \vdots \\ \mathbf{x}_{t+p|t+1} \end{bmatrix} = \begin{bmatrix} 0 & \mathbf{I} & 0 & \cdots & 0 \\ 0 & 0 & \mathbf{I} & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \Phi_p & \Phi_{p-1} & \cdots & \Phi_1 & \end{bmatrix} \begin{bmatrix} \mathbf{x}_t \\ \mathbf{x}_{t+1|t} \\ \vdots \\ \mathbf{x}_{t+p-1|t} \end{bmatrix} + \begin{bmatrix} \mathbf{I} \\ \Psi_1 \\ \vdots \\ \Psi_{p-1} \end{bmatrix} \mathbf{e}_{t+1}$$

Note that the state vector \mathbf{z}_t is composed of conditional expectations of \mathbf{x}_t and the first r components of \mathbf{z}_t are equal to \mathbf{x}_t .

The state space form can be cast into an ARMA form by solving the system of difference equations for the first r components.

When converting from an ARMA form to a state space form, you can generate a state vector larger than needed; that is, the state space model might not be a minimal representation. When going from a state space form to an ARMA form, you can have nontrivial common factors in the autoregressive and moving average operators that yield an ARMA model larger than necessary.

If the state space form used is not a minimal representation, some but not all components of $\mathbf{x}_{t+i|t}$ might be linearly dependent. This situation corresponds to $[\Phi_p \Theta_{p-1}]$ being of less than full rank when $\Phi(B)$ and $\Theta(B)$ have no common nontrivial left factors. In this case, \mathbf{z}_t consists of a subset of the possible components of $[\mathbf{x}_{t+i|t}]$ $i = 1, 2, \dots, p-1$. However, once a component of $\mathbf{x}_{t+i|t}$ (for example, the j th one) is linearly dependent on the previous conditional expectations, then all subsequent j th components of $\mathbf{x}_{t+k|t}$ for $k > i$ must also be linearly dependent. Note that in this case, equivalent but seemingly different structures can arise if the order of the components within \mathbf{x}_t is changed.

OUT= Data Set

The forecasts are contained in the output data set specified by the OUT= option in the PROC STATESPACE statement. The OUT= data set contains the following variables:

- the BY variables
- the ID variable
- the VAR statement variables. These variables contain the actual values from the input data set.
- FOR*i*, numeric variables that contain the forecasts. The variable FOR*i* contains the forecasts for the *i*th variable in the VAR statement list. Forecasts are one-step-ahead predictions until the end of the data or until the observation specified by the BACK= option.
- RES*i*, numeric variables that contain the residual for the forecast of the *i*th variable in the VAR statement list. For forecast observations, the actual values are missing and the RES*i* variables contain missing values.

- STD_i , numeric variables that contain the standard deviation for the forecast of the i th variable in the VAR statement list. The values of the STD_i variables can be used to construct univariate confidence limits for the corresponding forecasts. However, such confidence limits do not take into account the covariance of the forecasts.

OUTAR= Data Set

The OUTAR= data set contains the estimates of the preliminary autoregressive models. The OUTAR= data set contains the following variables:

- ORDER, a numeric variable that contains the order p of the autoregressive model that the observation represents
- AIC, a numeric variable that contains the value of the information criterion AIC_p
- SIGF l , numeric variables that contain the estimate of the innovation covariance matrices for the forward autoregressive models. The variable SIGF l contains the l th column of $\hat{\Sigma}_p$ in the observations with ORDER= p .
- SIGB l , numeric variables that contain the estimate of the innovation covariance matrices for the backward autoregressive models. The variable SIGB l contains the l th column of $\hat{\Omega}_p$ in the observations with ORDER= p .
- FOR k_l , numeric variables that contain the estimates of the autoregressive parameter matrices for the forward models. The variable FOR k_l contains the l th column of the lag k autoregressive parameter matrix $\hat{\Phi}_k^p$ in the observations with ORDER= p .
- BAC k_l , numeric variables that contain the estimates of the autoregressive parameter matrices for the backward models. The variable BAC k_l contains the l th column of the lag k autoregressive parameter matrix $\hat{\Psi}_k^p$ in the observations with ORDER= p .

The estimates for the order p autoregressive model can be selected as those observations with ORDER= p . Within these observations, the k,l th element of Φ_i^p is given by the value of the FOR i_l variable in the k th observation. The k,l th element of Ψ_i^p is given by the value of BAC i_l variable in the k th observation. The k,l th element of Σ_p is given by SIGF l in the k th observation. The k,l th element of Ω_p is given by SIGB l in the k th observation.

Table 28.2 shows an example of the OUTAR= data set, with ARMAX=3 and \mathbf{x}_t of dimension 2. In Table 28.2, (i, j) indicate the i,j th element of the matrix.

Table 28.2 Values in the OUTAR= Data Set

Obs	ORDER	AIC	SIGF1	SIGF2	SIGB1	SIGB2	FOR1_1	FOR1_2	FOR2_1	FOR2_2	FOR3_1
1	0	AIC ₀	$\Sigma_{0(1,1)}$	$\Sigma_{0(1,2)}$	$\Omega_{0(1,1)}$	$\Omega_{0(1,2)}$
2	0	AIC ₀	$\Sigma_{0(2,1)}$	$\Sigma_{0(2,2)}$	$\Omega_{0(2,1)}$	$\Omega_{0(2,2)}$
3	1	AIC ₁	$\Sigma_{1(1,1)}$	$\Sigma_{1(1,2)}$	$\Omega_{1(1,1)}$	$\Omega_{1(1,2)}$	$\Phi_1^1(1,1)$	$\Phi_1^1(1,2)$.	.	.
4	1	AIC ₁	$\Sigma_{1(2,1)}$	$\Sigma_{1(2,2)}$	$\Omega_{1(2,1)}$	$\Omega_{1(2,2)}$	$\Phi_1^1(2,1)$	$\Phi_1^1(2,2)$.	.	.
5	2	AIC ₂	$\Sigma_{2(1,1)}$	$\Sigma_{2(1,2)}$	$\Omega_{2(1,1)}$	$\Omega_{2(1,2)}$	$\Phi_2^1(1,1)$	$\Phi_2^1(1,2)$	$\Phi_2^2(1,1)$	$\Phi_2^2(1,2)$.
6	2	AIC ₂	$\Sigma_{2(2,1)}$	$\Sigma_{2(2,2)}$	$\Omega_{2(2,1)}$	$\Omega_{2(2,2)}$	$\Phi_2^2(2,1)$	$\Phi_2^2(2,2)$	$\Phi_2^3(2,1)$	$\Phi_2^3(2,2)$.
7	3	AIC ₃	$\Sigma_{3(1,1)}$	$\Sigma_{3(1,2)}$	$\Omega_{3(1,1)}$	$\Omega_{3(1,2)}$	$\Phi_3^1(1,1)$	$\Phi_3^1(1,2)$	$\Phi_3^2(1,1)$	$\Phi_3^2(1,2)$	$\Phi_3^3(1,1)$
8	3	AIC ₃	$\Sigma_{3(2,1)}$	$\Sigma_{3(2,2)}$	$\Omega_{3(2,1)}$	$\Omega_{3(2,2)}$	$\Phi_3^3(2,1)$	$\Phi_3^3(2,2)$	$\Phi_3^2(2,1)$	$\Phi_3^2(2,2)$	$\Phi_3^3(2,1)$

Obs	FOR3_2	BACK1_1	BACK1_2	BACK2_1	BACK2_2	BACK3_1	BACK3_2
1
2
3	.	$\Psi_1^1(1,1)$	$\Psi_1^1(1,2)$
4	.	$\Psi_1^2(2,1)$	$\Psi_1^2(2,2)$
5	.	$\Psi_2^1(1,1)$	$\Psi_2^1(1,2)$	$\Psi_2^2(1,1)$	$\Psi_2^2(1,2)$.	.
6	.	$\Psi_2^2(2,1)$	$\Psi_2^2(2,2)$	$\Psi_2^3(2,1)$	$\Psi_2^3(2,2)$.	.
7	$\Phi_3^3(1,2)$	$\Psi_3^3(1,1)$	$\Psi_3^3(1,2)$	$\Psi_3^2(1,1)$	$\Psi_3^2(1,2)$	$\Psi_3^3(1,1)$	$\Psi_3^3(1,2)$
8	$\Phi_3^3(2,2)$	$\Psi_3^3(2,1)$	$\Psi_3^3(2,2)$	$\Psi_3^2(2,1)$	$\Psi_3^2(2,2)$	$\Psi_3^3(2,1)$	$\Psi_3^3(2,2)$

The estimated autoregressive parameters can be used in the IML procedure to obtain autoregressive estimates of the spectral density function or forecasts based on the autoregressive models.

OUTMODEL= Data Set

The OUTMODEL= data set contains the estimates of the **F** and **G** matrices and their standard errors, the names of the components of the state vector, and the estimates of the innovation covariance matrix. The variables contained in the OUTMODEL= data set are as follows:

- the BY variables
- STATEVEC, a character variable that contains the name of the component of the state vector corresponding to the observation. The STATEVEC variable has the value STD for standard deviations observations, which contain the standard errors for the estimates given in the preceding observation.
- F_j, numeric variables that contain the columns of the **F** matrix. The variable F_j contains the jth column of **F**. The number of F_j variables is equal to the value of the DIMMAX= option. If the model is of smaller dimension, the extraneous variables are set to missing.
- G_j, numeric variables that contain the columns of the **G** matrix. The variable G_j contains the jth column of **G**. The number of G_j variables is equal to *r*, the dimension of **x_t** given by the number of variables in the VAR statement.
- SIG_j, numeric variables that contain the columns of the innovation covariance matrix. The variable SIG_j contains the jth column of Σ_{ee} . There are *r* variables SIG_j.

Table 28.3 shows an example of the OUTMODEL= data set, with $\mathbf{x}_t = (x_t, y_t)'$, $\mathbf{z}_t = (x_t, y_t, x_{t+1|t})'$, and DIMMAX=4. In Table 28.3, $F_{i,j}$ and $G_{i,j}$ are the *i,j*th elements of **F** and **G** respectively. Note that all elements for F_4 are missing because **F** is a 3 × 3 matrix.

Table 28.3 Value in the OUTMODEL= Data Set

Obs	STATEVEC	F_1	F_2	F_3	F_4	G_1	G_2	SIG_1	SIG_2
1	X(T;T)	0	0	1	.	1	0	$\Sigma_{1,1}$	$\Sigma_{1,2}$
2	STD
3	Y(T;T)	$F_{2,1}$	$F_{2,2}$	$F_{2,3}$.	0	1	$\Sigma_{2,1}$	$\Sigma_{2,2}$
4	STD	std $F_{2,1}$	std $F_{2,2}$	std $F_{2,3}$
5	X(T+1;T)	$F_{3,1}$	$F_{3,2}$	$F_{3,3}$.	$G_{3,1}$	$G_{3,2}$.	.
6	STD	std $F_{3,1}$	std $F_{3,2}$	std $F_{3,3}$.	std $G_{3,1}$	std $G_{3,2}$.	.

Printed Output

The printed output produced by the STATESPACE procedure includes the following:

1. descriptive statistics, which include the number of observations used, the names of the variables, their means and standard deviations (Std), and the differencing operations used
2. the Akaike information criteria for the sequence of preliminary autoregressive models
3. if the PRINTOUT=LONG option is specified, the sample autocovariance matrices of the input series at various lags
4. if the PRINTOUT=LONG option is specified, the sample autocorrelation matrices of the input series
5. a schematic representation of the autocorrelation matrices, showing the significant autocorrelations
6. if the PRINTOUT=LONG option is specified, the partial autoregressive matrices. (These are Φ_p^p as described in the section “[Preliminary Autoregressive Models](#)” on page 1851.)
7. a schematic representation of the partial autocorrelation matrices, showing the significant partial autocorrelations
8. the Yule-Walker estimates of the autoregressive parameters for the autoregressive model with the minimum AIC
9. if the PRINTOUT=LONG option is specified, the autocovariance matrices of the residuals of the minimum AIC model. This is the sequence of estimated innovation variance matrices for the solutions of the Yule-Walker equations.
10. if the PRINTOUT=LONG option is specified, the autocorrelation matrices of the residuals of the minimum AIC model
11. If the CANCELL option is specified, the canonical correlations analysis for each potential state vector considered in the state vector selection process. This includes the potential state vector, the canonical correlations, the information criterion for the smallest canonical correlation, Bartlett's χ^2 statistic (“Chi Square”) for the smallest canonical correlation, and the degrees of freedom of Bartlett's χ^2 .
12. the components of the chosen state vector

13. the preliminary estimate of the transition matrix, **F**, the input matrix, **G**, and the variance matrix for the innovations, Σ_{ee}
14. if the ITPRINT option is specified, the iteration history of the likelihood maximization. For each iteration, this shows the iteration number, the number of step halvings, the determinant of the innovation variance matrix, the damping factor Lambda, and the values of the parameters.
15. the state vector, printed again to aid interpretation of the following listing of **F** and **G**
16. the final estimate of the transition matrix **F**
17. the final estimate of the input matrix **G**
18. the final estimate of the variance matrix for the innovations Σ_{ee}
19. a table that lists the estimates of the free parameters in **F** and **G** and their standard errors and *t* statistics
20. if the COVB option is specified, the covariance matrix of the parameter estimates
21. if the COVB option is specified, the correlation matrix of the parameter estimates
22. if the PRINT option is specified, the forecasts and their standard errors

ODS Table Names

PROC STATESPACE assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 28.4 ODS Tables Produced in PROC STATESPACE

ODS Table Name	Description	Option
NObs	number of observations	default
Summary	simple summary statistics table	default
InfoCriterion	information criterion table	default
CovLags	covariance matrices of input series	PRINTOUT=LONG
CorrLags	correlation matrices of input series	PRINTOUT=LONG
PartialAR	partial autoregressive matrices	PRINTOUT=LONG
YWEstimates	Yule-Walker estimates for minimum AIC	default
CovResiduals	covariance of residuals	PRINTOUT=LONG
CorrResiduals	residual correlations from AR models	PRINTOUT=LONG
StateVector	state vector table	default
CorrGraph	schematic representation of correlations	default
TransitionMatrix	transition matrix	default
InputMatrix	input matrix	default
VarInnov	variance matrix for the innovation	default
CovB	covariance of parameter estimates	COVB
CorrB	correlation of parameter estimates	COVB

Table 28.4 *continued*

ODS Table Name	Description	Option
CanCorr	canonical correlation analysis	CANCORR
IterHistory	iterative fitting table	ITPRINT
ParameterEstimates	parameter estimates table	default
Forecasts	forecasts table	PRINT
ConvergenceStatus	convergence status table	default

Examples: STATESPACE Procedure

Example 28.1: Series J from Box and Jenkins

This example analyzes the gas furnace data (series J) from Box and Jenkins. (The data are not shown; see Box and Jenkins (1976) for the data.)

First, a model is selected and fit automatically using the following statements.

```

title1 'Gas Furnace Data';
title2 'Box & Jenkins Series J';
title3 'Automatically Selected Model';

proc statespace data=seriesj cancorr;
    var x y;
run;

```

The results for the automatically selected model are shown in [Output 28.1.1](#).

Output 28.1.1 Results for Automatically Selected Model

Gas Furnace Data		
Box & Jenkins Series J		
Automatically Selected Model		
The STATESPACE Procedure		
Number of Observations		296
Variable	Mean	Standard Error
x	-0.05683	1.072766
y	53.50912	3.202121

Output 28.1.1 *continued*

Gas Furnace Data											
Box & Jenkins Series J											
Automatically Selected Model											
The STATESPACE Procedure											
Information Criterion for Autoregressive Models											
Lag=0	Lag=1	Lag=2	Lag=3	Lag=4	Lag=5	Lag=6	Lag=7	Lag=8			
651.3862	-1033.57	-1632.96	-1645.12	-1651.52	-1648.91	-1649.34	-1643.15	-1638.56			
Information Criterion for Autoregressive Models											
Lag=9					Lag=10						
-1634.8					-1633.59						
Schematic Representation of Correlations											
Name/Lag	0	1	2	3	4	5	6	7	8	9	10
x	+-	+-	+-	+-	+-	+-	+-	+-	+-	+-	+-
y	-+	-+	-+	-+	-+	-+	-+	-+	-+	-+	-+
+ is > 2*std error, - is < -2*std error, . is between											

Output 28.1.2 Results for Automatically Selected Model

Schematic Representation of Partial Autocorrelations											
Name/Lag	1	2	3	4	5	6	7	8	9	10	
x	+. .	-.	+.	-.	
y	-+	--	-.	.++
+ is > 2*std error, - is < -2*std error, . is between											
Yule-Walker Estimates for Minimum AIC											
	-----Lag=1-----		-----Lag=2-----		-----Lag=3-----		-----Lag=4-----				
	x	y	x	y	x	y	x	y			
x	1.925887	-0.00124	-1.20166	0.004224	0.116918	-0.00867	0.104236	0.003268			
y	0.050496	1.299793	-0.02046	-0.3277	-0.71182	-0.25701	0.195411	0.133417			

Output 28.1.3 Results for Automatically Selected Model

Gas Furnace Data Box & Jenkins Series J Automatically Selected Model					
The STATESPACE Procedure Canonical Correlations Analysis					
$x(T;T)$	$y(T;T)$	$x(T+1;T)$	Information Criterion	Chi Square	DF
1	1	0.804883	292.9228	304.7481	8

Output 28.1.4 Results for Automatically Selected Model

Gas Furnace Data Box & Jenkins Series J Automatically Selected Model					
The STATESPACE Procedure Selected Statespace Form and Preliminary Estimates					
State Vector					
$x(T;T)$	$y(T;T)$	$x(T+1;T)$	$y(T+1;T)$	$y(T+2;T)$	
Estimate of Transition Matrix					
0	0	1	0	0	
0	0	0	1	0	
-0.84718	0.026794	1.711715	-0.05019	0	
0	0	0	0	1	
-0.19785	0.334274	-0.18174	-1.23557	1.787475	
Input Matrix for Innovation					
		1	0		
		0	1		
		1.925887	-0.00124		
		0.050496	1.299793		
		0.142421	1.361696		

Output 28.1.5 Results for Automatically Selected Model

Variance Matrix for Innovation	
0.035274	-0.00734
-0.00734	0.097569

Output 28.1.6 Results for Automatically Selected Model

Gas Furnace Data				
Box & Jenkins Series J				
Automatically Selected Model				
The STATESPACE Procedure				
Selected Statespace Form and Fitted Model				
State Vector				
$x(T;T)$	$y(T;T)$	$x(T+1;T)$	$y(T+1;T)$	$y(T+2;T)$
Estimate of Transition Matrix				
0	0	1	0	0
0	0	0	1	0
-0.86192	0.030609	1.724235	-0.05483	0
0	0	0	0	1
-0.34839	0.292124	-0.09435	-1.09823	1.671418
Input Matrix for Innovation				
	1	0		
	0	1		
	1.92442	-0.00416		
	0.015621	1.258495		
	0.08058	1.353204		

Output 28.1.7 Results for Automatically Selected Model

Variance Matrix for Innovation	
0.035579	-0.00728
-0.00728	0.095577

Output 28.1.7 *continued*

Parameter Estimates				
Parameter	Estimate	Standard Error	t Value	
F(3,1)	-0.86192	0.072961	-11.81	
F(3,2)	0.030609	0.026167	1.17	
F(3,3)	1.724235	0.061599	27.99	
F(3,4)	-0.05483	0.030169	-1.82	
F(5,1)	-0.34839	0.135253	-2.58	
F(5,2)	0.292124	0.046299	6.31	
F(5,3)	-0.09435	0.096527	-0.98	
F(5,4)	-1.09823	0.109525	-10.03	
F(5,5)	1.671418	0.083737	19.96	
G(3,1)	1.924420	0.058162	33.09	
G(3,2)	-0.00416	0.035255	-0.12	
G(4,1)	0.015621	0.095771	0.16	
G(4,2)	1.258495	0.055742	22.58	
G(5,1)	0.080580	0.151622	0.53	
G(5,2)	1.353204	0.091388	14.81	

The two series are believed to have a transfer function relation with the gas rate (variable X) as the input and the CO₂ concentration (variable Y) as the output. Since the parameter estimates shown in [Output 28.1.1](#) support this kind of model, the model is reestimated with the feedback parameters restricted to 0. The following statements fit the transfer function (no feedback) model.

```

title3 'Transfer Function Model';
proc statespace data=seriesj printout=none;
  var x y;
  restrict f(3,2)=0 f(3,4)=0
           g(3,2)=0 g(4,1)=0 g(5,1)=0;
run;

```

The last two pages of the output are shown in [Output 28.1.8](#).

Output 28.1.8 STATESPACE Output for Transfer Function Model

Gas Furnace Data				
Box & Jenkins Series J				
Transfer Function Model				
The STATESPACE Procedure				
Selected Statespace Form and Fitted Model				
State Vector				
x(T;T)	y(T;T)	x(T+1;T)	y(T+1;T)	y(T+2;T)

Output 28.1.8 *continued*

Estimate of Transition Matrix				
0	0	1	0	0
0	0	0	1	0
-0.68882	0	1.598717	0	0
0	0	0	0	1
-0.35944	0.284179	-0.0963	-1.07313	1.650047

Input Matrix for Innovation	
1	0
0	1
1.923446	0
0	1.260856
0	1.346332

Output 28.1.9 STATESPACE Output for Transfer Function Model

Variance Matrix for Innovation	
0.036995	-0.0072
-0.0072	0.095712

Parameter Estimates			
Parameter	Estimate	Standard Error	t Value
F(3,1)	-0.68882	0.050549	-13.63
F(3,3)	1.598717	0.050924	31.39
F(5,1)	-0.35944	0.229044	-1.57
F(5,2)	0.284179	0.096944	2.93
F(5,3)	-0.09630	0.140876	-0.68
F(5,4)	-1.07313	0.250385	-4.29
F(5,5)	1.650047	0.188533	8.75
G(3,1)	1.923446	0.056328	34.15
G(4,2)	1.260856	0.056464	22.33
G(5,2)	1.346332	0.091086	14.78

References

- Akaike, H. (1974), "Markovian Representation of Stochastic Processes and Its Application to the Analysis of Autoregressive Moving Average Processes," *Annals of the Institute of Statistical Mathematics*, 26, 363–387.
- Akaike, H. (1976), "Canonical Correlations Analysis of Time Series and the Use of an Information Criterion," in *Advances and Case Studies in System Identification*, eds. R. Mehra and D.G. Lainiotis, New York: Academic Press.
- Anderson, T.W. (1971), *The Statistical Analysis of Time Series*, New York: John Wiley & Sons.
- Ansley, C.F. and Newbold, P. (1979), "Multivariate Partial Autocorrelations," *Proceedings of the Business and Economic Statistics Section*, American Statistical Association, 349–353.
- Box, G.E.P. and Jenkins, G. (1976), *Time Series Analysis: Forecasting and Control*, San Francisco: Holden-Day.
- Brockwell, P.J. and Davis, R.A. (1991), *Time Series: Theory and Methods*, 2nd Edition, Springer-Verlag.
- Hannan, E.J. (1970), *Multiple Time Series*, New York: John Wiley & Sons.
- Hannan, E.J. (1976), "The Identification and Parameterization of ARMAX and State Space Forms," *Econometrica*, 44, 713–722.
- Harvey, A.C. (1981a), *The Econometric Analysis of Time Series*, New York: John Wiley & Sons.
- Harvey, A.C. (1981b), *Time Series Models*, New York: John Wiley & Sons.
- Jones, R.H. (1974), "Identification and Autoregressive Spectrum Estimation," *IEEE Transactions on Automatic Control*, AC-19, 894–897.
- Pham-Dinh-Tuan (1978), "On the Fitting of Multivariate Processes of the Autoregressive Moving Average Type," *Biometrika*, 65, 99–107.
- Priestley, M.B. (1980), "System Identification, Kalman Filtering, and Stochastic Control," in *Directions in Time Series*, eds. D.R. Brillinger and G.C. Tiao, Institute of Mathematical Statistics.
- Whittle, P. (1963), "On the Fitting of Multivariate Autoregressions and the Approximate Canonical Factorization of a Spectral Density Matrix," *Biometrika*, 50, 129–134.

Chapter 29

The SYSLIN Procedure

Contents

Overview: SYSLIN Procedure	1876
Getting Started: SYSLIN Procedure	1877
An Example Model	1877
Variables in a System of Equations	1878
Using PROC SYSLIN	1878
OLS Estimation	1879
Two-Stage Least Squares Estimation	1881
LIML, K-Class, and MELO Estimation	1883
SUR, 3SLS, and FIML Estimation	1883
Computing Reduced Form Estimates	1887
Restricting Parameter Estimates	1888
Testing Parameters	1890
Saving Residuals and Predicted Values	1892
Plotting Residuals	1893
Syntax: SYSLIN Procedure	1895
Functional Summary	1895
PROC SYSLIN Statement	1897
BY Statement	1900
ENDOGENOUS Statement	1900
IDENTITY Statement	1900
INSTRUMENTS Statement	1901
MODEL Statement	1901
OUTPUT Statement	1902
RESTRICT Statement	1903
SRESTRICT Statement	1904
STEST Statement	1906
TEST Statement	1907
VAR Statement	1908
WEIGHT Statement	1909
Details: SYSLIN Procedure	1909
Input Data Set	1909
Estimation Methods	1910
ANOVA Table for Instrumental Variables Methods	1912
The R-Square Statistics	1913

Computational Details	1914
Missing Values	1917
OUT= Data Set	1917
OUTEST= Data Set	1917
OUTSSCP= Data Set	1919
Printed Output	1919
ODS Table Names	1921
ODS Graphics	1922
Examples: SYSLIN Procedure	1923
Example 29.1: Klein's Model I Estimated with LIML and 3SLS	1923
Example 29.2: Grunfeld's Model Estimated with SUR	1930
Example 29.3: Illustration of ODS Graphics	1934
References	1937

Overview: SYSLIN Procedure

The SYSLIN procedure estimates parameters in an interdependent system of linear regression equations.

Ordinary least squares (OLS) estimates are biased and inconsistent when current period endogenous variables appear as regressors in other equations in the system. The errors of a set of related regression equations are often correlated, and the efficiency of the estimates can be improved by taking these correlations into account. The SYSLIN procedure provides several techniques that produce consistent and asymptotically efficient estimates for systems of regression equations.

The SYSLIN procedure provides the following estimation methods:

- ordinary least squares (OLS)
- two-stage least squares (2SLS)
- limited information maximum likelihood (LIML)
- K-class
- seemingly unrelated regressions (SUR)
- iterated seemingly unrelated regressions (ITSUR)
- three-stage least squares (3SLS)
- iterated three-stage least squares (IT3SLS)
- full information maximum likelihood (FIML)
- minimum expected loss (MELO)

Other features of the SYSLIN procedure enable you to:

- impose linear restrictions on the parameter estimates
- test linear hypotheses about the parameters
- write predicted and residual values to an output SAS data set
- write parameter estimates to an output SAS data set
- write the crossproducts matrix (SSCP) to an output SAS data set
- use raw data, correlations, covariances, or cross products as input

Getting Started: SYSLIN Procedure

This section introduces the use of the SYSLIN procedure. The problem of dependent regressors is introduced using a supply and demand example. This section explains the terminology used for variables in a system of regression equations and introduces the SYSLIN procedure statements for declaring the roles the variables play. The syntax used for the different estimation methods and the output produced is shown.

An Example Model

In simultaneous systems of equations, endogenous variables are determined jointly rather than sequentially. Consider the following supply and demand functions for some product:

$$Q_D = a_1 + b_1 P + c_1 Y + d_1 S + \epsilon_1 (\text{demand})$$

$$Q_S = a_2 + b_2 P + c_2 U + \epsilon_2 (\text{supply})$$

$$Q = Q_D = Q_S (\text{market equilibrium})$$

The variables in this system are as follows:

Q_D	quantity demanded
Q_S	quantity supplied
Q	the observed quantity sold, which equates quantity supplied and quantity demanded in equilibrium
P	price per unit
Y	income
S	price of substitutes
U	unit cost

ϵ_1	the random error term for the demand equation
ϵ_2	the random error term for the supply equation

In this system, quantity demanded depends on price, income, and the price of substitutes. Consumers normally purchase more of a product when prices are lower and when income and the price of substitute goods are higher. Quantity supplied depends on price and the unit cost of production. Producers supply more when price is high and when unit cost is low. The actual price and quantity sold are determined jointly by the values that equate demand and supply.

Since price and quantity are jointly endogenous variables, both structural equations are necessary to adequately describe the observed values. A critical assumption of OLS is that the regressors are uncorrelated with the residual. When current endogenous variables appear as regressors in other equations (endogenous variables depend on each other), this assumption is violated and the OLS parameter estimates are biased and inconsistent. The bias caused by the violated assumptions is called *simultaneous equation bias*. Neither the demand nor supply equation can be estimated consistently by OLS.

Variables in a System of Equations

Before explaining how to use the SYSLIN procedure, it is useful to define some terms. The variables in a system of equations can be classified as follows:

- *Endogenous variables*, which are also called *jointly dependent* or *response variables*, are the variables determined by the system. Endogenous variables can also appear on the right-hand side of equations.
- *Exogenous variables* are independent variables that do not depend on any of the endogenous variables in the system.
- *Predetermined variables* include both the exogenous variables and *lagged endogenous variables*, which are past values of endogenous variables determined at previous time periods. PROC SYSLIN does not compute lagged values; any lagged endogenous variables must be computed in a preceding DATA step.
- *Instrumental variables* are predetermined variables used in obtaining predicted values for the current period endogenous variables by a first-stage regression. The use of instrumental variables characterizes estimation methods such as two-stage least squares and three-stage least squares. Instrumental variables estimation methods substitute these first-stage predicted values for endogenous variables when they appear as regressors in model equations.

Using PROC SYSLIN

First specify the input data set and estimation method in the PROC SYSLIN statement. If any model uses dependent regressors, and you are using an instrumental variables regression method, declare the dependent regressors with an ENDOGENOUS statement and declare the instruments with an INSTRUMENTS statement. Next, use MODEL statements to specify the structural equations of the system.

The use of different estimation methods is shown by the following examples. These examples use the simulated dataset WORK.IN given below.

```
data in;
  label q = "Quantity"
        p = "Price"
        s = "Price of Substitutes"
        y = "Income"
        u = "Unit Cost";
  drop i e1 e2;
  p = 0; q = 0;
  do i = 1 to 60;
    y = 1 + .05*i + .15*rannor(123);
    u = 2 + .05*rannor(123) + .05*rannor(123);
    s = 4 - .001*(i-10)*(i-110) + .5*rannor(123);
    e1 = .15 * rannor(123);
    e2 = .15 * rannor(123);
    demandx = 1 + .3 * y + .35 * s + e1;
    supplyx = -1 - 1 * u + e2 - .4*e1;
    q = 1.4/2.15 * demandx + .75/2.15 * supplyx;
    p = ( - q + supplyx ) / -1.4;
    output;
  end;
run;
```

OLS Estimation

PROC SYSLIN performs OLS regression if you do not specify a method of estimation in the PROC SYSLIN statement. OLS does not use instruments, so the ENDOGENOUS and INSTRUMENTS statements can be omitted.

The following statements estimate the supply and demand model shown previously:

```
proc syslin data=in;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

The PROC SYSLIN output for the demand equation is shown in [Figure 29.1](#), and the output for the supply equation is shown in [Figure 29.2](#).

Figure 29.1 OLS Results for Demand Equation

The SYSLIN Procedure	
Ordinary Least Squares Estimation	
Model	DEMAND
Dependent Variable	q
Label	Quantity

Figure 29.1 continued

Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	3	9.587901	3.195967	398.31	<.0001	
Error	56	0.449338	0.008024			
Corrected Total	59	10.03724				
Root MSE		0.08958	R-Square	0.95523		
Dependent Mean		1.30095	Adj R-Sq	0.95283		
Coeff Var		6.88542				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.47677	0.210239	-2.27	0.0272	Intercept
p	1	0.123326	0.105177	1.17	0.2459	Price
y	1	0.201282	0.032403	6.21	<.0001	Income
s	1	0.167258	0.024091	6.94	<.0001	Price of Substitutes

Figure 29.2 OLS Results for Supply Equation

The SYSLIN Procedure						
Ordinary Least Squares Estimation						
Model			SUPPLY			
Dependent Variable			q			
Label			Quantity			
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	2	9.033902	4.516951	256.61	<.0001	
Error	57	1.003337	0.017602			
Corrected Total	59	10.03724				
Root MSE		0.13267	R-Square	0.90004		
Dependent Mean		1.30095	Adj R-Sq	0.89653		
Coeff Var		10.19821				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.30389	0.471397	-0.64	0.5217	Intercept
p	1	1.218743	0.053914	22.61	<.0001	Price
u	1	-1.07757	0.234150	-4.60	<.0001	Unit Cost

For each MODEL statement, the output first shows the model label and dependent variable name and label. This is followed by an analysis-of-variance table for the model, which shows the model, error, and total mean squares, and an F test for the no-regression hypothesis. Next, the procedure prints the root mean squared error, dependent variable mean and coefficient of variation, and the R^2 and adjusted R^2 statistics.

Finally, the table of parameter estimates shows the estimated regression coefficients, standard errors, and t tests. You would expect the price coefficient in a demand equation to be negative. However, note that the OLS estimate of the price coefficient P in the demand equation (0.1233) has a positive sign. This could be caused by simultaneous equation bias.

Two-Stage Least Squares Estimation

In the supply and demand model, P is an endogenous variable, and consequently the OLS estimates are biased. The following example estimates this model using two-stage least squares.

```
proc syslin data=in 2sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

The 2SLS option in the PROC SYSLIN statement specifies the two-stage least squares method. The ENDOGENOUS statement specifies that P is an endogenous regressor for which first-stage predicted values are substituted. You need to declare an endogenous variable in the ENDOGENOUS statement only if it is used as a regressor; thus although Q is endogenous in this model, it is not necessary to list it in the ENDOGENOUS statement.

Usually, all predetermined variables that appear in the system are used as instruments. The INSTRUMENTS statement specifies that the exogenous variables Y , U , and S are used as instruments for the first-stage regression to predict P .

The 2SLS results are shown in [Figure 29.3](#) and [Figure 29.4](#). The first-stage regressions are not shown. To see the first-stage regression results, use the FIRST option in the PROC SYSLIN statement.

Figure 29.3 2SLS Results for Demand Equation

The SYSLIN Procedure	
Two-Stage Least Squares Estimation	
Model	DEMAND
Dependent Variable	q
Label	Quantity

Figure 29.3 continued

Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	3	9.670892	3.223631	115.58	<.0001	
Error	56	1.561956	0.027892			
Corrected Total	59	10.03724				
Root MSE		0.16701	R-Square	0.86095		
Dependent Mean		1.30095	Adj R-Sq	0.85350		
Coeff Var		12.83744				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.901048	1.171231	1.62	0.1102	Intercept
p	1	-1.11519	0.607395	-1.84	0.0717	Price
y	1	0.419546	0.117955	3.56	0.0008	Income
s	1	0.331475	0.088472	3.75	0.0004	Price of Substitutes

Figure 29.4 2SLS Results for Supply Equation

The SYSLIN Procedure						
Two-Stage Least Squares Estimation						
Model		SUPPLY				
Dependent Variable		q				
Label		Quantity				
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	2	9.646109	4.823054	253.96	<.0001	
Error	57	1.082503	0.018991			
Corrected Total	59	10.03724				
Root MSE		0.13781	R-Square	0.89910		
Dependent Mean		1.30095	Adj R-Sq	0.89556		
Coeff Var		10.59291				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.51878	0.490999	-1.06	0.2952	Intercept
p	1	1.333080	0.059271	22.49	<.0001	Price
u	1	-1.14623	0.243491	-4.71	<.0001	Unit Cost

The 2SLS output is similar in form to the OLS output. However, the 2SLS results are based on predicted values for the endogenous regressors from the first stage instrumental regressions. This makes the analysis-of-variance table and the R^2 statistics difficult to interpret. See the sections “[ANOVA Table for Instrumental Variables Methods](#)” on page 1912 and “[The R-Square Statistics](#)” on page 1913 for details.

Note that, unlike the OLS results, the 2SLS estimate for the P coefficient in the demand equation (–1.115) is negative.

LIML, K-Class, and MELO Estimation

To obtain limited information maximum likelihood, general K-class, or minimum expected loss estimates, use the ENDOGENOUS, INSTRUMENTS, and MODEL statements as in the 2SLS case but specify the LIML, K=, or MELO option instead of 2SLS in the PROC SYSLIN statement. The following statements show this for K-class estimation.

```
proc syslin data=in k=.5;
    endogenous p;
    instruments y u s;
    demand: model q = p y s;
    supply: model q = p u;
run;
```

For more information about these estimation methods, see the section “[Estimation Methods](#)” on page 1910 and consult econometrics textbooks.

SUR, 3SLS, and FIML Estimation

In a multivariate regression model, the errors in different equations might be correlated. In this case, the efficiency of the estimation might be improved by taking these cross-equation correlations into account.

Seemingly Unrelated Regression

Seemingly unrelated regression (SUR), also called joint generalized least squares (JGLS) or Zellner estimation, is a generalization of OLS for multi-equation systems. Like OLS, the SUR method assumes that all the regressors are independent variables, but SUR uses the correlations among the errors in different equations to improve the regression estimates. The SUR method requires an initial OLS regression to compute residuals. The OLS residuals are used to estimate the cross-equation covariance matrix.

The SUR option in the PROC SYSLIN statement specifies seemingly unrelated regression, as shown in the following statements:

```
proc syslin data=in sur;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

INSTRUMENTS and ENDOGENOUS statements are not needed for SUR, because the SUR method assumes there are no endogenous regressors. For SUR to be effective, the models must use different regressors. SUR produces the same results as OLS unless the model contains at least one regressor not used in the other equations.

Three-Stage Least Squares

The three-stage least squares method generalizes the two-stage least squares method to take into account the correlations between equations in the same way that SUR generalizes OLS. Three-stage least squares requires three steps: first-stage regressions to get predicted values for the endogenous regressors; a two-stage least squares step to get residuals to estimate the cross-equation correlation matrix; and the final 3SLS estimation step.

The 3SLS option in the PROC SYSLIN statement specifies the three-stage least squares method, as shown in the following statements.

```
proc syslin data=in 3sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

The 3SLS output begins with a two-stage least squares regression to estimate the cross-model correlation matrix. This output is the same as the 2SLS results shown in [Figure 29.3](#) and [Figure 29.4](#), and is not repeated here. The next part of the 3SLS output prints the cross-model correlation matrix computed from the 2SLS residuals. This output is shown in [Figure 29.5](#) and includes the cross-model covariances, correlations, the inverse of the correlation matrix, and the inverse covariance matrix.

Figure 29.5 Estimated Cross-Model Covariances Used for 3SLS Estimates

The SYSLIN Procedure			
Three-Stage Least Squares Estimation			
Cross Model Covariance			
	DEMAND	SUPPLY	
DEMAND	0.027892	-.011283	
SUPPLY	-.011283	0.018991	

Figure 29.5 continued

Cross Model Correlation		
	DEMAND	SUPPLY
DEMAND	1.00000	-0.49022
SUPPLY	-0.49022	1.00000
Cross Model Inverse Correlation		
	DEMAND	SUPPLY
DEMAND	1.31634	0.64530
SUPPLY	0.64530	1.31634
Cross Model Inverse Covariance		
	DEMAND	SUPPLY
DEMAND	47.1941	28.0379
SUPPLY	28.0379	69.3130

The final 3SLS estimates are shown in Figure 29.6.

Figure 29.6 Three-Stage Least Squares Results

System Weighted MSE		0.5711				
Degrees of freedom		113				
System Weighted R-Square		0.9627				
Model		DEMAND				
Dependent Variable		q				
Label		Quantity				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.980269	1.169176	1.69	0.0959	Intercept
p	1	-1.17654	0.605015	-1.94	0.0568	Price
y	1	0.404117	0.117179	3.45	0.0011	Income
s	1	0.359204	0.085077	4.22	<.0001	Price of Substitutes
Model		SUPPLY				
Dependent Variable		q				
Label		Quantity				

Figure 29.6 *continued*

Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.51878	0.490999	-1.06	0.2952	Intercept
p	1	1.333080	0.059271	22.49	<.0001	Price
u	1	-1.14623	0.243491	-4.71	<.0001	Unit Cost

This output first prints the system weighted mean squared error and system weighted R^2 statistics. The system weighted MSE and system weighted R^2 measure the fit of the joint model obtained by stacking all the models together and performing a single regression with the stacked observations weighted by the inverse of the model error variances. See the section “[The R-Square Statistics](#)” on page 1913 for details.

Next, the table of 3SLS parameter estimates for each model is printed. This output has the same form as for the other estimation methods.

Note that, in some cases, the 3SLS and 2SLS results can be the same. Such a case could arise because of the same principle that causes OLS and SUR results to be identical, unless an equation includes a regressor not used in the other equations of the system. However, the application of this principle is more complex when instrumental variables are used. When all the exogenous variables are used as instruments, linear combinations of all the exogenous variables appear in the third-stage regressions through substitution of first-stage predicted values.

In this example, 3SLS produces different (and, it is hoped, more efficient) estimates for the demand equation. However, the 3SLS and 2SLS results for the supply equation are the same. This is because the supply equation has one endogenous regressor and one exogenous regressor not used in other equations. In contrast, the demand equation has fewer endogenous regressors than exogenous regressors not used in other equations in the system.

Full Information Maximum Likelihood

The FIML option in the PROC SYSLIN statement specifies the full information maximum likelihood method, as shown in the following statements.

```
proc syslin data=in fiml;
  endogenous p q;
  instruments y u s;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

The FIML results are shown in [Figure 29.7](#).

Figure 29.7 FIML Results

The SYSLIN Procedure						
Full-Information Maximum Likelihood Estimation						
NOTE: Convergence criterion met at iteration 3.						
Model			DEMAND			
Dependent Variable			q			
Label			Quantity			
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.988538	1.233632	1.61	0.1126	Intercept
p	1	-1.18148	0.652278	-1.81	0.0755	Price
y	1	0.402312	0.107270	3.75	0.0004	Income
s	1	0.361345	0.103817	3.48	0.0010	Price of Substitutes
Model			SUPPLY			
Dependent Variable			q			
Label			Quantity			
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.52443	0.479522	-1.09	0.2787	Intercept
p	1	1.336083	0.057939	23.06	<.0001	Price
u	1	-1.14804	0.237793	-4.83	<.0001	Unit Cost

Computing Reduced Form Estimates

A system of structural equations with endogenous regressors can be represented as functions of only the predetermined variables. For this to be possible, there must be as many equations as endogenous variables. If there are more endogenous variables than regression models, you can use **IDENTITY** statements to complete the system. See the section “[Reduced Form Estimates](#)” on page 1915 for details.

The **REDUCED** option in the **PROC SYSLIN** statement prints reduced form estimates. The following statements show this by using the 3SLS estimates of the structural parameters.

```
proc syslin data=in 3sls reduced;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  supply: model q = p u;
run;
```

The first four pages of this output were as shown previously and are not repeated here. (See Figure 29.3, Figure 29.4, Figure 29.5, and Figure 29.6.) The final page of the output from this example contains the reduced form coefficients from the 3SLS structural estimates, as shown in Figure 29.8.

Figure 29.8 Reduced Form 3SLS Results

The SYSLIN Procedure				
Three-Stage Least Squares Estimation				
Endogenous Variables				
		P	q	
DEMAND		1.176543	1	
SUPPLY		-1.33308	1	
Exogenous Variables				
	Intercept	y	s	u
DEMAND	1.980269	0.404117	0.359204	0
SUPPLY	-0.51878	0	0	-1.14623
Inverse Endogenous Variables				
		DEMAND	SUPPLY	
p		0.398466	-0.39847	
q		0.531187	0.468813	
Reduced Form				
	Intercept	y	s	u
p	0.995788	0.161027	0.143131	0.456735
q	0.808682	0.214662	0.190804	-0.53737

Restricting Parameter Estimates

You can impose restrictions on the parameter estimates with **RESTRICT** and **SRESTRICT** statements. The **RESTRICT** statement imposes linear restrictions on parameters in the equation specified by the preceding **MODEL** statement. The **SRESTRICT** statement imposes linear restrictions that relate parameters in different models.

To impose restrictions involving parameters in different equations, use the **SRESTRICT** statement. Specify the parameters in the linear hypothesis as *model-label.regressor-name*. (If the **MODEL** statement does not have a label, you can use the dependent variable name as the label for the model, provided the dependent variable uniquely labels the model.)

Tests for the significance of the restrictions are printed when **RESTRICT** or **SRESTRICT** statements are used. You can label **RESTRICT** and **SRESTRICT** statements to identify the restrictions in the output.

The RESTRICT statement in the following example restricts the price coefficient in the demand equation to equal 0.015. The SRESTRICT statement restricts the estimate of the income coefficient in the demand equation to be 0.01 times the estimate of the unit cost coefficient in the supply equation.

```
proc syslin data=in 3sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  peq015: restrict p = .015;
  supply: model q = p u;
  yeq01u: srestrict demand.y = .01 * supply.u;
run;
```

The restricted estimation results are shown in [Figure 29.9](#).

Figure 29.9 Restricted Estimates

The SYSLIN Procedure						
Three-Stage Least Squares Estimation						
Model				DEMAND		
Dependent Variable				q		
Label				Quantity		
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.46584	0.053307	-8.74	<.0001	Intercept
p	1	0.015000	0	.	.	Price
y	1	-0.00679	0.002357	-2.88	0.0056	Income
s	1	0.325589	0.009872	32.98	<.0001	Price of Substitutes
RESTRICT	-1	50.59353	7.464988	6.78	<.0001	PEQ015
Model				SUPPLY		
Dependent Variable				q		
Label				Quantity		
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-1.31894	0.477633	-2.76	0.0077	Intercept
p	1	1.291718	0.059101	21.86	<.0001	Price
u	1	-0.67887	0.235679	-2.88	0.0056	Unit Cost
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
RESTRICT	-1	342.3605	38.12094	8.98	<.0001	YEQ01U

The standard error for P in the demand equation is 0, since the value of the P coefficient was specified by the **RESTRICT** statement and not estimated from the data. The “Parameter Estimates” table for the demand equation contains an additional row for the restriction specified by the **RESTRICT** statement. The parameter estimate for the restriction is the value of the Lagrange multiplier used to impose the restriction. The restriction is highly significant ($t = 6.777$), which means that the data are not consistent with the restriction, and the model does not fit as well with the restriction imposed. See the section “**RESTRICT Statement**” on page 1903 for details.

Following the “Parameter Estimates” table for the supply equation, the results for the cross model restrictions are printed. This shows that the restriction specified by the **SRESTRICT** statement is not consistent with the data ($t = 8.98$). See the section “**SRESTRICT Statement**” on page 1904 for details.

Testing Parameters

You can test linear hypotheses about the model parameters with **TEST** and **STEST** statements. The **TEST** statement tests hypotheses about parameters in the equation specified by the preceding **MODEL** statement. The **STEST** statement tests hypotheses that relate parameters in different models.

For example, the following statements test the hypothesis that the price coefficient in the demand equation is equal to 0.015.

```
proc syslin data=in 3sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  test_1: test p = .015;
  supply: model q = p u;
run;
```

The **TEST** statement results are shown in Figure 29.10. This reports an F test for the hypothesis specified by the **TEST** statement. In this case, the F statistic is 6.79 (3.879/.571) with 1 and 113 degrees of freedom. The p value for this F statistic is 0.0104, which indicates that the hypothesis tested is almost but not quite rejected at the 0.01 level. See the section “**TEST Statement**” on page 1907 for details.

Figure 29.10 TEST Statement Results

The SYSLIN Procedure	
Three-Stage Least Squares Estimation	
System Weighted MSE	0.5711
Degrees of freedom	113
System Weighted R-Square	0.9627
Model	DEMAND
Dependent Variable	q
Label	Quantity

Figure 29.10 continued

Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.980269	1.169176	1.69	0.0959	Intercept
p	1	-1.17654	0.605015	-1.94	0.0568	Price
y	1	0.404117	0.117179	3.45	0.0011	Income
s	1	0.359204	0.085077	4.22	<.0001	Price of Substitutes
Test Results						
Num DF	Den DF	F Value	Pr > F	Label		
1	113	6.79	0.0104	TEST_1		

To test hypotheses that involve parameters in different equations, use the `STEST` statement. Specify the parameters in the linear hypothesis as *model-label.regressor-name*. (If the `MODEL` statement does not have a label, you can use the dependent variable name as the label for the model, provided the dependent variable uniquely labels the model.)

For example, the following statements test the hypothesis that the income coefficient in the demand equation is 0.01 times the unit cost coefficient in the supply equation:

```
proc syslin data=in 3sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  supply: model q = p u;
  stest1: stest demand.y = .01 * supply.u;
run;
```

The `STEST` statement results are shown in Figure 29.11. The form and interpretation of the `STEST` statement results are like the `TEST` statement results. In this case, the *F* test produces a *p* value less than 0.0001, and strongly rejects the hypothesis tested. See the section “[STEST Statement](#)” on page 1906 for details.

Figure 29.11 STEST Statement Results

The SYSLIN Procedure	
Three-Stage Least Squares Estimation	
System Weighted MSE	0.5711
Degrees of freedom	113
System Weighted R-Square	0.9627
Model	DEMAND
Dependent Variable	q
Label	Quantity

Figure 29.11 continued

Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.980269	1.169176	1.69	0.0959	Intercept
p	1	-1.17654	0.605015	-1.94	0.0568	Price
y	1	0.404117	0.117179	3.45	0.0011	Income
s	1	0.359204	0.085077	4.22	<.0001	Price of Substitutes
<div> <div>Model</div> <div>Dependent Variable</div> <div>Label</div> </div> <div> <div>SUPPLY</div> <div>q</div> <div>Quantity</div> </div>						
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.51878	0.490999	-1.06	0.2952	Intercept
p	1	1.333080	0.059271	22.49	<.0001	Price
u	1	-1.14623	0.243491	-4.71	<.0001	Unit Cost
Test Results						
Num DF	Den DF	F Value	Pr > F	Label		
1	113	22.46	0.0001	STEST1		

You can combine TEST and STEST statements with RESTRICT and SRESTRICT statements to perform hypothesis tests for restricted models. Of course, the validity of the TEST and STEST statement results depends on the correctness of any restrictions you impose on the estimates.

Saving Residuals and Predicted Values

You can store predicted values and residuals from the estimated models in a SAS data set. Specify the OUT= option in the PROC SYSLIN statement and use the OUTPUT statement to specify names for new variables to contain the predicted and residual values.

For example, the following statements store the predicted quantity from the supply and demand equations in a data set PRED:

```
proc syslin data=in out=pred 3sls;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  output predicted=q_demand;
  supply: model q = p u;
  output predicted=q_supply;
run;
```

Plotting Residuals

You can plot the residuals against the regressors by using the PROC SGPLOT. For example, the following statements plot the 2SLS residuals for the demand model against price, income, and price of substitutes.

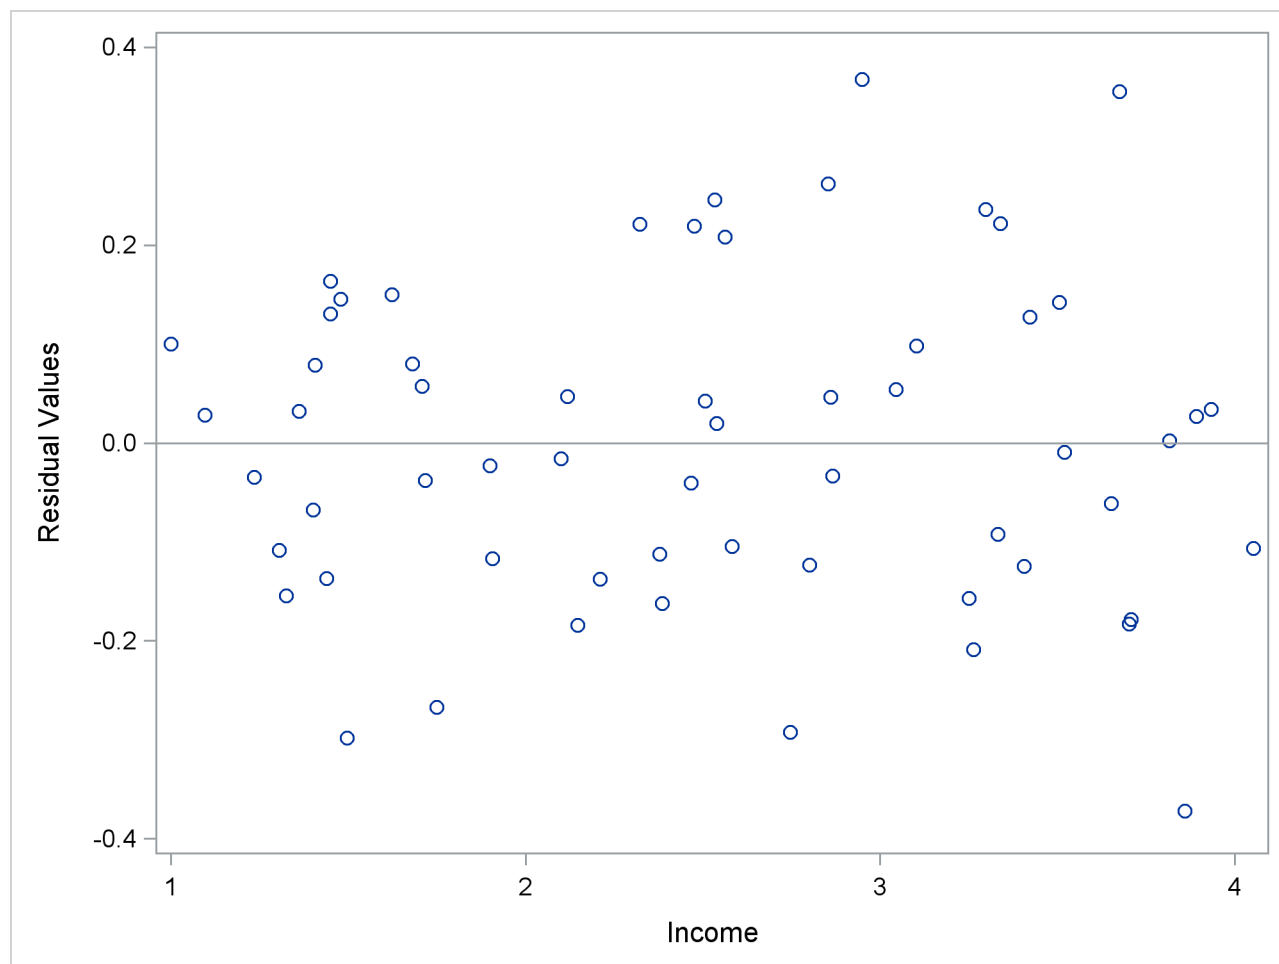
```
proc syslin data=in 2sls out=out;
  endogenous p;
  instruments y u s;
  demand: model q = p y s;
  output residual=residual_q;
run;

proc sgplot data=out;
  scatter x=p y=residual_q;
  refline 0 / axis=y;
run;

proc sgplot data=out;
  scatter x=y y=residual_q;
  refline 0 / axis=y;
run;

proc sgplot data=out;
  scatter x=s y=residual_q;
  refline 0 / axis=y;
run;
```

The plot for income is shown in [Figure 29.12](#). The other plots are not shown.

Figure 29.12 Plot of Residuals against Income

Syntax: SYSLIN Procedure

The SYSLIN procedure uses the following statements:

```

PROC SYSLIN options ;
  BY variables ;
  ENDOGENOUS variables ;
  IDENTITY identities ;
  INSTRUMENTS variables ;
  MODEL response = regressors / options ;
  OUTPUT PREDICTED= variable RESIDUAL= variable ;
  RESTRICT restrictions ;
  SRESTRICT restrictions ;
  STEST equations ;
  TEST equations ;
  VAR variables ;
  WEIGHT variable ;

```

Functional Summary

The SYSLIN procedure statements and options are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify the input data set	PROC SYSLIN	DATA=
specify the output data set	PROC SYSLIN	OUT=
write parameter estimates to an output data set	PROC SYSLIN	OUTEST=
write covariances to the OUTEST= data set	PROC SYSLIN	OUTCOV OUTCOV3
write the SSCP matrix to an output data set	PROC SYSLIN	OUTSSCP=
Estimation Method Options		
specify full information maximum likelihood estimation	PROC SYSLIN	FIML
specify iterative SUR estimation	PROC SYSLIN	ITSUR
specify iterative 3SLS estimation	PROC SYSLIN	IT3SLS
specify K-class estimation	PROC SYSLIN	K=
specify limited information maximum likelihood estimation	PROC SYSLIN	LIML
specify minimum expected loss estimation	PROC SYSLIN	MELO
specify ordinary least squares estimation	PROC SYSLIN	OLS

Description	Statement	Option
specify seemingly unrelated estimation	PROC SYSLIN	SUR
specify two-stage least squares estimation	PROC SYSLIN	2SLS
specify three-stage least squares estimation	PROC SYSLIN	3SLS
specify Fuller's modification to LIML	PROC SYSLIN	ALPHA=
specify convergence criterion	PROC SYSLIN	CONVERGE=
specify maximum number of iterations	PROC SYSLIN	MAXIT=
use diagonal of S instead of S	PROC SYSLIN	SDIAG
exclude RESTRICT statements in final stage	PROC SYSLIN	NOINCLUDE
specify criterion for testing for singularity	PROC SYSLIN	SINGULAR=
specify denominator for variance estimates	PROC SYSLIN	VARDEF=
Printing Control Options		
print all results	PROC SYSLIN	ALL
print first-stage regression statistics	PROC SYSLIN	FIRST
print estimates and SSE at each iteration	PROC SYSLIN	ITPRINT
print the reduced form estimates	PROC SYSLIN	REDUCED
print descriptive statistics	PROC SYSLIN	SIMPLE
print uncorrected SSCP matrix	PROC SYSLIN	USSCP
print correlations of the parameter estimates	MODEL	CORRB
print covariances of the parameter estimates	MODEL	COVB
print Durbin-Watson statistics	MODEL	DW
print Basmann's test	MODEL	OVERID
plot residual values against regressors	MODEL	PLOT
print standardized parameter estimates	MODEL	STB
print unrestricted parameter estimates	MODEL	UNREST
print the model crossproducts matrix	MODEL	XPX
print the inverse of the crossproducts matrix	MODEL	I
suppress printed output	MODEL	NOPRINT
suppress all printed output	PROC SYSLIN	NOPRINT
Model Specification		
specify structural equations	MODEL	
suppress the intercept parameter	MODEL	NOINT
specify linear relationship among variables	IDENTITY	
perform weighted regression	WEIGHT	
Tests and Restrictions on Parameters		
place restrictions on parameter estimates	RESTRICT	
place restrictions on parameter estimates	SRESTRICT	
test linear hypothesis	STEST	
test linear hypothesis	TEST	

Description	Statement	Option
Other Statements		
specify BY-group processing	BY	
specify the endogenous variables	ENDOGENOUS	
specify instrumental variables	INSTRUMENTS	
write predicted and residual values to a data set	OUTPUT	
name variable for predicted values	OUTPUT	PREDICTED=
name variable for residual values	OUTPUT	RESIDUAL=
include additional variables in $X'X$ matrix	VAR	

PROC SYSLIN Statement

PROC SYSLIN *options* ;

The following options can be used with the PROC SYSLIN statement.

Data Set Options

DATA=SAS-data-set

specifies the input data set. If the DATA= option is omitted, the most recently created SAS data set is used. In addition to ordinary SAS data sets, PROC SYSLIN can analyze data sets of TYPE=CORR, TYPE=COV, TYPE=UCORR, TYPE=UCOV, and TYPE=SSCP. See the section “[Special TYPE= Input Data Sets](#)” on page 1909 for details.

OUT=SAS-data-set

specifies an output SAS data set for residuals and predicted values. The OUT= option is used in conjunction with the OUTPUT statement. See the section “[OUT= Data Set](#)” on page 1917 for details.

OUTEST=SAS-data-set

writes the parameter estimates to an output data set. See the section “[OUTEST= Data Set](#)” on page 1917 for details.

OUTCOV

COVOUT

writes the covariance matrix of the parameter estimates to the OUTEST= data set in addition to the parameter estimates.

OUTCOV3

COV3OUT

writes covariance matrices for each model in a system to the OUTEST= data set when the 3SLS, SUR, or FIML option is used.

OUTSSCP=SAS-data-set

writes the sum-of-squares-and-crossproducts matrix to an output data set. See the section “[OUTSSCP= Data Set](#)” on page 1919 for details.

Estimation Method Options

2SLS

specifies the two-stage least squares estimation method.

3SLS

specifies the three-stage least squares estimation method.

ALPHA=value

specifies Fuller’s modification to the LIML estimation method. See the section “[Fuller’s Modification to LIML](#)” on page 1916 for details.

CONVERGE=value

specifies the convergence criterion for the iterative estimation methods IT3SLS, ITSUR, and FIML. The default is CONVERGE=0.0001.

FIML

specifies the full information maximum likelihood estimation method.

ITSUR

specifies the iterative seemingly unrelated estimation method.

IT3SLS

specifies the iterative three-stage least squares estimation method.

K=value

specifies the K-class estimation method.

LIML

specifies the limited information maximum likelihood estimation method.

MAXITER=n

specifies the maximum number of iterations allowed for the IT3SLS, ITSUR, and FIML estimation methods. The MAXITER= option can be abbreviated as MAXIT=. The default is MAXITER=30.

MELO

specifies the minimum expected loss estimation method.

NOINCLUDE

excludes the RESTRICT statements from the final stage for the 3SLS, IT3SLS, SUR, and ITSUR estimation methods.

OLS

specifies the ordinary least squares estimation method. This is the default.

SDIAG

uses the diagonal of **S** instead of **S** to do the estimation, where **S** is the covariance matrix of equation errors. See the section “[Uncorrelated Errors across Equations](#)” on page 1916 for details.

SINGULAR=value

specifies a criterion for testing singularity of the crossproducts matrix. This is a tuning parameter used to make PROC SYSLIN more or less sensitive to singularities. The value must be between 0 and 1. The default is SINGULAR=1E-8.

SUR

specifies the seemingly unrelated estimation method.

Printing Control Options**ALL**

specifies the CORRB, COVB, DW, I, OVERID, PLOT, STB, and XPX options for every MODEL statement.

FIRST

prints first-stage regression statistics for the endogenous variables regressed on the instruments. This output includes sums of squares, estimates, variances, and standard deviations.

ITPRINT

prints parameter estimates, system-weighted residual sum of squares, and R^2 at each iteration for the IT3SLS and ITSUR estimation methods. For the FIML method, the ITPRINT option prints parameter estimates, negative of log-likelihood function, and norm of gradient vector at each iteration.

NOPRINT

suppresses all printed output. Specifying NOPRINT in the PROC SYSLIN statement is equivalent to specifying NOPRINT in every MODEL statement.

REDUCED

prints the reduced form estimates. If the REDUCED option is specified, you should specify any IDENTITY statements needed to make the system square. See the section “[Reduced Form Estimates](#)” on page 1915 for details.

SIMPLE

prints descriptive statistics for the dependent variables. The statistics printed include the sum, mean, uncorrected sum of squares, variance, and standard deviation.

USSCP

prints the uncorrected sum-of-squares-and-crossproducts matrix.

USSCP2

prints the uncorrected sum-of-squares-and-crossproducts matrix for all variables used in the analysis, including predicted values of variables generated by the procedure.

VARDEF=DF | N | WEIGHT | WGT

specifies the denominator to use in calculating cross-equation error covariances and parameter standard errors and covariances. The default is VARDEF=DF, which corrects for model degrees of freedom. VARDEF=N specifies no degrees-of-freedom correction. VARDEF=WEIGHT specifies the sum of the observation weights. VARDEF=WGT specifies the sum of the observation weights minus the model degrees of freedom. See the section “[Computation of Standard Errors](#)” on page 1915 for details.

BY Statement

BY *variables* ;

A BY statement can be used with PROC SYSLIN to obtain separate analyses on observations in groups defined by the BY variables.

ENDOGENOUS Statement

ENDOGENOUS *variables* ;

The ENDOGENOUS statement declares the jointly dependent variables that are projected in the first-stage regression through the instrument variables. The ENDOGENOUS statement is not needed for the SUR, ITSUR, or OLS estimation methods. The default ENDOGENOUS list consists of all the dependent variables in the MODEL and IDENTITY statements that do not appear in the INSTRUMENTS statement.

IDENTITY Statement

IDENTITY *equation* ;

The IDENTITY statement specifies linear relationships among variables to write to the OUTEST= data set. It provides extra information in the OUTEST= data set but does not create or compute variables. The OUTEST= data set can be processed by the SIMLIN procedure in a later step.

The IDENTITY statement is also used to compute reduced form coefficients when the REDUCED option in the PROC SYSLIN statement is specified. See the section “[Reduced Form Estimates](#)” on page 1915 for details.

The *equation* given by the IDENTITY statement has the same form as equations in the MODEL statement. A label can be specified for an IDENTITY statement as follows:

label : **IDENTITY** ... ;

INSTRUMENTS Statement

INSTRUMENTS *variables* ;

The INSTRUMENTS statement declares the variables used in obtaining first-stage predicted values. All the instruments specified are used in each first-stage regression. The INSTRUMENTS statement is required for the 2SLS, 3SLS, IT3SLS, LIML, MELO, and K-class estimation methods. The INSTRUMENTS statement is not needed for the SUR, ITSUR, OLS, or FIML estimation methods.

MODEL Statement

MODEL *response = regressors / options* ;

The MODEL statement regresses the response variable on the left side of the equal sign against the regressors listed on the right side.

Models can be given labels. Model labels are used in the printed output to identify the results for different models. Model labels are also used in SRESTRICT and STEST statements to refer to parameters in different models. If no label is specified, the response variable name is used as the label for the model. The model label is specified as follows:

label : **MODEL** ...;

The following options can be used in the MODEL statement after a slash (/).

ALL

specifies the CORRB, COVB, DW, I, OVERID, PLOT, STB, and XPX options.

ALPHA=*value*

specifies the α parameter for Fuller's modification to the LIML estimation method. See the section "[Fuller's Modification to LIML](#)" on page 1916 for details.

CORRB

prints the matrix of estimated correlations between the parameter estimates.

COVB

prints the matrix of estimated covariances between the parameter estimates.

DW

prints Durbin-Watson statistics and autocorrelation coefficients for the residuals. If there are missing values, d' is calculated according to Savin and White (1978). Use the DW option only if the data set to be analyzed is an ordinary SAS data set with time series observations sorted in time order. The Durbin-Watson test is not valid for models with lagged dependent regressors.

I

prints the inverse of the crossproducts matrix for the model, $(\mathbf{X}'\mathbf{X})^{-1}$. If restrictions are specified, the crossproducts matrix printed is adjusted for the restrictions. See the section "[Computational Details](#)" on page 1914 for details.

K=value

specifies K-class estimation.

NOINT

suppresses the intercept parameter from the model.

NOPRINT

suppresses the normal printed output.

OVERID

prints Basmann's (1960) test for over identifying restrictions. See the section "[Overidentification Restrictions](#)" on page 1916 for details.

PLOT

plots residual values against regressors. A plot of the residuals for each regressor is printed.

STB

prints standardized parameter estimates. Sometimes known as a standard partial regression coefficient, a standardized parameter estimate is a parameter estimate multiplied by the standard deviation of the associated regressor and divided by the standard deviation of the response variable.

UNREST

prints parameter estimates computed before restrictions are applied. The UNREST option is valid only if a RESTRICT statement is specified.

XPX

prints the model crossproducts matrix, $X'X$. See the section "[Computational Details](#)" on page 1914 for details.

OUTPUT Statement

OUTPUT < *PREDICTED=variable* > < *RESIDUAL=variable* > ;

The OUTPUT statement writes predicted values and residuals from the preceding model to the data set specified by the OUT= option in the PROC SYSLIN statement. An OUTPUT statement must come after the MODEL statement to which it applies. The OUT= option must be specified in the PROC SYSLIN statement.

The following options can be specified in the OUTPUT statement:

PREDICTED=variable

names a new variable to contain the predicted values for the response variable. The PREDICTED= option can be abbreviated as PREDICT=, PRED=, or P=.

RESIDUAL=variable

names a new variable to contain the residual values for the response variable. The RESIDUAL= option can be abbreviated as RESID= or R=.

For example, the following statements create an output data set named B. In addition to the variables in the input data set, the data set B contains the variable YHAT, with values that are predicted values of the response variable Y, and YRESID, with values that are the residual values of Y.

```
proc syslin data=a out=b;
  model y = x1 x2;
  output p=yhat r=yresid;
run;
```

For example, the following statements create an output data set named PRED. In addition to the variables in the input data set, the data set PRED contains the variables Q_DEMAND and Q_SUPPLY, with values that are predicted values of the response variable Q for the demand and supply equations respectively, and R_DEMAND and R_SUPPLY, with values that are the residual values of the demand and supply equations respectively.

```
proc syslin data=in out=pred;
  demand: model q = p y s;
  output p=q_demand r=r_demand;
  supply: model q = p u;
  output p=q_supply r=r_supply;
run;
```

See the section “[OUT= Data Set](#)” on page 1917 for details.

RESTRICT Statement

RESTRICT *equation* , ... , *equation* ;

The RESTRICT statement places restrictions on the parameter estimates for the preceding MODEL statement. Any number of RESTRICT statements can follow a MODEL statement. Each restriction is written as a linear equation. If more than one restriction is specified in a single RESTRICT statement, the restrictions are separated by commas.

Parameters are referred to by the name of the corresponding regressor variable. Each name used in the equation must be a regressor in the preceding MODEL statement. The keyword INTERCEPT is used to refer to the intercept parameter in the model.

RESTRICT statements can be given labels. The labels are used in the printed output to distinguish results for different restrictions. Labels are specified as follows:

label : **RESTRICT** ...;

The following is an example of the use of the RESTRICT statement, in which the coefficients of the regressors X1 and X2 are required to sum to 1.

```
proc syslin data=a;
  model y = x1 x2;
```

```

    restrict x1 + x2 = 1;
run;

```

Variable names can be multiplied by constants. When no equal sign appears, the linear combination is set equal to 0. Note that the parameters associated with the variables are restricted, not the variables themselves. Here are some examples of valid RESTRICT statements:

```

restrict x1 + x2 = 1;
restrict x1 + x2 - 1;
restrict 2 * x1 = x2 + x3 , intercept + x4 = 0;
restrict x1 = x2 = x3 = 1;
restrict 2 * x1 - x2;

```

Restricted parameter estimates are computed by introducing a Lagrangian parameter λ for each restriction (Pringle and Rayner 1971). The estimates of these Lagrangian parameters are printed in the “Parameter Estimates” table. If a restriction cannot be applied, its parameter value and degrees of freedom are listed as 0.

The Lagrangian parameter λ measures the sensitivity of the sum of squared errors (SSE) to the restriction. If the restriction is changed by a small amount ϵ , the SSE is changed by $2\lambda\epsilon$.

The t ratio tests the significance of the restrictions. If λ is zero, the restricted estimates are the same as the unrestricted.

Any number of restrictions can be specified on a RESTRICT statement, and any number of RESTRICT statements can be used. The estimates are computed subject to all restrictions specified. However, restrictions should be consistent and not redundant.

NOTE: The RESTRICT statement is not supported for the FIML estimation method.

SRESTRICT Statement

SRESTRICT *equation* , . . . , *equation* ;

The SRESTRICT statement imposes linear restrictions that involve parameters in two or more MODEL statements. The SRESTRICT statement is like the RESTRICT statement but is used to impose restrictions across equations, whereas the RESTRICT statement applies only to parameters in the immediately preceding MODEL statement.

Each restriction is written as a linear equation. Parameters are referred to as *label.variable*, where *label* is the model label and *variable* is the name of the regressor to which the parameter is attached. (If the MODEL statement does not have a label, you can use the dependent variable name as the label for the model, provided the dependent variable uniquely labels the model.) Each variable name used must be a regressor in the indicated MODEL statement. The keyword INTERCEPT is used to refer to intercept parameters.

SRESTRICT statements can be given labels. The labels are used in the printed output to distinguish results for different restrictions. Labels are specified as follows:

label : **SRESTRICT** ...;

The following is an example of the use of the SRESTRICT statement, in which the coefficient for the regressor X2 is constrained to be the same in both models.

```
proc syslin data=a 3sls;
  endogenous y1 y2;
  instruments x1 x2;
  model y1 = y2 x1 x2;
  model y2 = y1 x2;
  srestrict y1.x2 = y2.x2;
run;
```

When no equal sign is used, the linear combination is set equal to 0. Thus, the restriction in the preceding example can also be specified as

```
srestrict y1.x2 - y2.x2;
```

Any number of restrictions can be specified on an SRESTRICT statement, and any number of SRESTRICT statements can be used. The estimates are computed subject to all restrictions specified. However, restrictions should be consistent and not redundant.

When a system restriction is requested for a single equation estimation method (such as OLS or 2SLS), PROC SYSLIN produces the restricted estimates by actually using a corresponding system method. For example, when SRESTRICT is specified along with OLS, PROC SYSLIN produces the restricted OLS estimates via a two-step process equivalent to using SUR estimation with the SDIAG option. First, the unrestricted OLS results are produced. Then, the GLS (SUR) estimation with the system restriction is performed, using the diagonal of the covariance matrix of the residuals. When SRESTRICT is specified along with 2SLS, PROC SYSLIN produces the restricted 2SLS estimates via a multistep process equivalent to using 3SLS estimation with the SDIAG option. First, the unrestricted 2SLS results are produced. Then, the GLS (3SLS) estimation with the system restriction is performed, using the diagonal of the covariance matrix of the residuals.

The results of the SRESTRICT statements are printed after the parameter estimates for all the models in the system. The format of the SRESTRICT statement output is the same as the “Parameter Estimates” table. In this output the parameter estimate is the Lagrangian parameter λ used to impose the restriction.

The Lagrangian parameter λ measures the sensitivity of the system sum of square errors to the restriction. The system SSE is the system MSE shown in the printed output multiplied by the degrees of freedom. If the restriction is changed by a small amount ϵ , the system SSE is changed by $2\lambda\epsilon$.

The t ratio tests the significance of the restriction. If λ is zero, the restricted estimates are the same as the unrestricted estimates.

The model degrees of freedom are not adjusted for the cross-model restrictions imposed by SRESTRICT statements.

NOTE: The SRESTRICT statement is not supported for the LIML and the FIML estimation methods.

STEST Statement

STEST *equation* , ... , *equation* / *options* ;

The STEST statement performs an F test for the joint hypotheses specified in the statement.

The hypothesis is represented in matrix notation as

$$\mathbf{L}\beta = \mathbf{c}$$

and the F test is computed as

$$\frac{(\mathbf{L}b - \mathbf{c})'(\mathbf{L}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{L}')^{-1}(\mathbf{L}b - \mathbf{c})}{m\hat{\sigma}^2}$$

where b is the estimate of β , m is the number of restrictions, and $\hat{\sigma}^2$ is the system weighted mean squared error. See the section “[Computational Details](#)” on page 1914 for information about the matrix $\mathbf{X}'\mathbf{X}$.

Each hypothesis to be tested is written as a linear equation. Parameters are referred to as *label.variable*, where *label* is the model label and *variable* is the name of the regressor to which the parameter is attached. (If the MODEL statement does not have a label, you can use the dependent variable name as the label for the model, provided the dependent variable uniquely labels the model.) Each variable name used must be a regressor in the indicated MODEL statement. The keyword INTERCEPT is used to refer to intercept parameters.

STEST statements can be given labels. The label is used in the printed output to distinguish different tests. Any number of STEST statements can be specified. Labels are specified as follows:

label : **STEST** ...;

The following is an example of the STEST statement:

```
proc syslin data=a 3sls;
  endogenous y1 y2;
  instruments x1 x2;
  model y1 = y2 x1 x2;
  model y2 = y1 x2;
  stest y1.x2 = y2.x2;
run;
```

The test performed is exact only for ordinary least squares, given the OLS assumptions of the linear model. For other estimation methods, the F test is based on large sample theory and is only approximate in finite samples.

If RESTRICT or SRESTRICT statements are used, the tests computed by the STEST statement are conditional on the restrictions specified. The validity of the tests can be compromised if incorrect restrictions are imposed on the estimates.

The following are examples of STEST statements:

```
stest a.x1 + b.x2 = 1;
stest 2 * b.x2 = c.x3 + c.x4 ,
      a.intercept + b.x2 = 0;
stest a.x1 = c.x2 = b.x3 = 1;
stest 2 * a.x1 - b.x2 = 0;
```

The PRINT option can be specified in the STEST statement after a slash (/):

PRINT

prints intermediate calculations for the hypothesis tests.

NOTE: The STEST statement is not supported for the FIML estimation method.

TEST Statement

TEST *equation* , ... , *equation* / *options* ;

The TEST statement performs F tests of linear hypotheses about the parameters in the preceding MODEL statement. Each equation specifies a linear hypothesis to be tested. If more than one equation is specified, the equations are separated by commas.

Variable names must correspond to regressors in the preceding MODEL statement, and each name represents the coefficient of the corresponding regressor. The keyword INTERCEPT is used to refer to the model intercept.

TEST statements can be given labels. The label is used in the printed output to distinguish different tests. Any number of TEST statements can be specified. Labels are specified as follows:

label : **TEST** ...;

The following is an example of the use of TEST statement, which tests the hypothesis that the coefficients of X1 and X2 are the same:

```
proc syslin data=a;
  model y = x1 x2;
  test x1 = x2;
run;
```

The following statements perform F tests for the hypothesis that the coefficients of X1 and X2 are equal, for the hypothesis that the sum of the X1 and X2 coefficients is twice the intercept, and for the joint hypothesis.

```
proc syslin data=a;
  model y = x1 x2;
  x1eqx2: test x1 = x2;
  sumeq2i: test x1 + x2 = 2 * intercept;
```

```
joint:  test x1 = x2, x1 + x2 = 2 * intercept;
run;
```

The following are additional examples of TEST statements:

```
test x1 + x2 = 1;
test x1 = x2 = x3 = 1;
test 2 * x1 = x2 + x3, intercept + x4 = 0;
test 2 * x1 - x2;
```

The TEST statement performs an F test for the joint hypotheses specified. The hypothesis is represented in matrix notation as follows:

$$\mathbf{L}\boldsymbol{\beta} = \mathbf{c}$$

The F test is computed as

$$\frac{(\mathbf{L}\mathbf{b} - \mathbf{c})'(\mathbf{L}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{L}')^{-1}(\mathbf{L}\mathbf{b} - \mathbf{c})}{m\hat{\sigma}^2}$$

where \mathbf{b} is the estimate of $\boldsymbol{\beta}$, m is the number of restrictions, and $\hat{\sigma}^2$ is the model mean squared error. See the section “[Computational Details](#)” on page 1914 for information about the matrix $\mathbf{X}'\mathbf{X}$.

The test performed is exact only for ordinary least squares, given the OLS assumptions of the linear model. For other estimation methods, the F test is based on large sample theory and is only approximate in finite samples.

If RESTRICT or SRESTRICT statements are used, the tests computed by the TEST statement are conditional on the restrictions specified. The validity of the tests can be compromised if incorrect restrictions are imposed on the estimates.

The PRINT option can be specified in the TEST statement after a slash (/):

PRINT

prints intermediate calculations for the hypothesis tests.

NOTE: The TEST statement is not supported for the FIML estimation method.

VAR Statement

```
VAR variables ;
```

The VAR statement is used to include variables in the crossproducts matrix that are not specified in any MODEL statement. This statement is rarely used with PROC SYSLIN and is used only with the OUTSSCP= option in the PROC SYSLIN statement.

WEIGHT Statement

WEIGHT *variable* ;

The WEIGHT statement is used to perform weighted regression. The WEIGHT statement names a variable in the input data set whose values are relative weights for a weighted least squares fit. If the weight value is proportional to the reciprocal of the variance for each observation, the weighted estimates are the best linear unbiased estimates (BLUE).

Details: SYSLIN Procedure

Input Data Set

PROC SYSLIN does not compute new values for regressors. For example, if you need a lagged variable, you must create it with a DATA step. No values are computed by IDENTITY statements; all values must be in the input data set.

Special TYPE= Input Data Sets

The input data set for most applications of the SYSLIN procedure contains standard rectangular data. However, PROC SYSLIN can also process input data in the form of a crossproducts, covariance, or correlation matrix. Data sets that contain such matrices are identified by values of the TYPE= data set option.

These special kinds of input data sets can be used to save computer time. It takes nk^2 operations, where n is the number of observations and k is the number of variables, to calculate cross products; the regressions are of the order k^3 . When n is in the thousands and k is much smaller, you can save most of the computer time in later runs of PROC SYSLIN by reusing the SSCP matrix rather than recomputing it.

The SYSLIN procedure can process TYPE=CORR, COV, UCORR, UCOV, or SSCP data sets. TYPE=CORR and TYPE=COV data sets, usually created by the CORR procedure, contain means and standard deviations, and correlations or covariances. TYPE=SSCP data sets, usually created in previous runs of PROC SYSLIN, contain sums of squares and cross products. See the *SAS/STAT User's Guide* for more information about special SAS data sets.

When special SAS data sets are read, you must specify the TYPE= data set option. PROC CORR and PROC SYSLIN automatically set the type for output data sets; however, if you create the data set by some other means, you must specify its type with the TYPE= data set option.

When the special data sets are used, the DW (Durbin-Watson test) and PLOT options in the MODEL statement cannot be performed, and the OUTPUT statements are not valid.

Estimation Methods

A brief description of the methods used by the SYSLIN procedure follows. For more information about these methods, see the references at the end of this chapter.

There are two fundamental methods of estimation for simultaneous equations: least squares and maximum likelihood. There are two approaches within each of these categories: single equation methods (also referred to as limited information methods) and system methods (also referred to as full information methods). System methods take into account cross-equation correlations of the disturbances in estimating parameters, while single equation methods do not.

OLS, 2SLS, MELO, K-class, SUR, ITSUR, 3SLS, and IT3SLS use the least squares method; LIML and FIML use the maximum likelihood method.

OLS, 2SLS, MELO, K-class, and LIML are single equation methods. The system methods are SUR, ITSUR, 3SLS, IT3SLS, and FIML.

Single Equation Estimation Methods

Single equation methods do not take into account correlations of errors across equations. As a result, these estimators are not asymptotically efficient compared to full information methods; however, there are instances in which they may be preferred. (See the section “[Choosing a Method for Simultaneous Equations](#)” on page 1912 for details.)

Let y_i be the dependent endogenous variable in equation i , and X_i and Y_i be the matrices of exogenous and endogenous variables appearing as regressors in the same equation.

The 2SLS method owes its name to the fact that, in a first stage, the instrumental variables are used as regressors to obtain a projected value \hat{Y}_i that is uncorrelated with the residual in equation i . In a second stage, \hat{Y}_i replaces Y_i on the right-hand side to obtain consistent least squares estimators.

Normally, the predetermined variables of the system are used as the instruments. It is possible to use variables other than predetermined variables from your system as instruments; however, the estimation might not be as efficient. For consistent estimates, the instruments must be uncorrelated with the residual and correlated with the endogenous variables.

The LIML method results in consistent estimates that are equal to the 2SLS estimates when an equation is exactly identified. LIML can be viewed as a least-variance ratio estimation or as a maximum likelihood estimation. LIML involves minimizing the ratio $\lambda = (rvar_eq)/(rvar_sys)$, where $rvar_eq$ is the residual variance associated with regressing the weighted endogenous variables on all predetermined variables that appear in that equation, and $rvar_sys$ is the residual variance associated with regressing weighted endogenous variables on all predetermined variables in the system.

The MELO method computes the minimum expected loss estimator. MELO estimators “minimize the posterior expectation of generalized quadratic loss functions for structural coefficients of linear structural models” (Judge et al. 1985, p. 635).

K-class estimators are a class of estimators that depends on a user-specified parameter k . A k value less than 1 is recommended but not required. The parameter k can be deterministic or stochastic, but its probability

limit must equal 1 for consistent parameter estimates. When all the predetermined variables are listed as instruments, they include all the other single equation estimators supported by PROC SYSLIN. The instance when some of the predetermined variables are not listed among the instruments is not supported by PROC SYSLIN for the general K-class estimation. However, it is supported for the other methods.

For $k = 1$, the K-class estimator is the 2SLS estimator, while for $k = 0$, the K-class estimator is the OLS estimator. The K-class interpretation of LIML is that $k = \lambda$. Note that k is stochastic in the LIML method, unlike for OLS and 2SLS.

MELO is a Bayesian K-class estimator. It yields estimates that can be expressed as a matrix-weighted average of the OLS and 2SLS estimates. MELO estimators have finite second moments and hence finite risk. Other frequently used K-class estimators might not have finite moments under some commonly encountered circumstances, and hence there can be infinite risk relative to quadratic and other loss functions.

One way of comparing K-class estimators is to note that when $k=1$, the correlation between regressor and the residual is completely corrected for. In all other cases, it is only partially corrected for.

See “[Computational Details](#)” on page 1914 for more details about K-class estimators.

SUR and 3SLS Estimation Methods

SUR might improve the efficiency of parameter estimates when there is contemporaneous correlation of errors across equations. In practice, the contemporaneous correlation matrix is estimated using OLS residuals. Under two sets of circumstances, SUR parameter estimates are the same as those produced by OLS: when there is no contemporaneous correlation of errors across equations (the estimate of the contemporaneous correlation matrix is diagonal) and when the independent variables are the same across equations.

Theoretically, SUR parameter estimates are always at least as efficient as OLS in large samples, provided that your equations are correctly specified. However, in small samples the need to estimate the covariance matrix from the OLS residuals increases the sampling variability of the SUR estimates. This effect can cause SUR to be less efficient than OLS. If the sample size is small and the cross-equation correlations are small, then OLS is preferred to SUR. The consequences of specification error are also more serious with SUR than with OLS.

The 3SLS method combines the ideas of the 2SLS and SUR methods. Like 2SLS, the 3SLS method uses \hat{Y} instead of Y for endogenous regressors, which results in consistent estimates. Like SUR, the 3SLS method takes the cross-equation error correlations into account to improve large sample efficiency. For 3SLS, the 2SLS residuals are used to estimate the cross-equation error covariance matrix.

The SUR and 3SLS methods can be iterated by recomputing the estimate of the cross-equation covariance matrix from the SUR or 3SLS residuals and then computing new SUR or 3SLS estimates based on this updated covariance matrix estimate. Continuing this iteration until convergence produces ITSUR or IT3SLS estimates.

FIML Estimation Method

The FIML estimator is a system generalization of the LIML estimator. The FIML method involves minimizing the determinant of the covariance matrix associated with residuals of the reduced form of the equation system. From a maximum likelihood standpoint, the LIML method involves assuming that the errors are

normally distributed and then maximizing the likelihood function subject to restrictions on a particular equation. FIML is similar, except that the likelihood function is maximized subject to restrictions on all of the parameters in the model, not just those in the equation being estimated.

NOTE: The RESTRICT, SRESTRICT, TEST, and STEST statements are not supported when the FIML method is used.

Choosing a Method for Simultaneous Equations

A number of factors should be taken into account in choosing an estimation method. Although system methods are asymptotically most efficient in the absence of specification error, system methods are more sensitive to specification error than single equation methods.

In practice, models are never perfectly specified. It is a matter of judgment whether the misspecification is serious enough to warrant avoidance of system methods.

Another factor to consider is sample size. With small samples, 2SLS might be preferred to 3SLS. In general, it is difficult to say much about the small sample properties of K-class estimators because the results depend on the regressors used.

LIML and FIML are invariant to the normalization rule imposed but are computationally more expensive than 2SLS or 3SLS.

If the reason for contemporaneous correlation among errors across equations is a common, omitted variable, it is not necessarily best to apply SUR. SUR parameter estimates are more sensitive to specification error than OLS. OLS might produce better parameter estimates under these circumstances. SUR estimates are also affected by the sampling variation of the error covariance matrix. There is some evidence from Monte Carlo studies that SUR is less efficient than OLS in small samples.

ANOVA Table for Instrumental Variables Methods

In the instrumental variables methods (2SLS, LIML, K-class, MELO), first-stage predicted values are substituted for the endogenous regressors. As a result, the regression sum of squares (RSS) and the error sum of squares (ESS) do not sum to the total corrected sum of squares for the dependent variable (TSS). The analysis-of-variance table included in the second-stage results gives these sums of squares and the mean squares that are used for the F test, but this table is not a variance decomposition in the usual sense.

The F test shown in the instrumental variables case is a valid test of the no-regression hypothesis that the true coefficients of all regressors are 0. However, because of the first-stage projection of the regression mean square, this is a Wald-type test statistic, which is asymptotically F but not exactly F -distributed in finite samples. Thus, for small samples the F test is only approximate when instrumental variables are used.

The R-Square Statistics

As explained in the section “ANOVA Table for Instrumental Variables Methods” on page 1912, when instrumental variables are used, the regression sum of squares (RSS) and the error sum of squares (ESS) do not sum to the total corrected sum of squares. In this case, there are several ways that the R^2 statistic can be defined.

The definition of R^2 used by the SYSLIN procedure is

$$R^2 = \frac{RSS}{RSS + ESS}$$

This definition is consistent with the F test of the null hypothesis that the true coefficients of all regressors are zero. However, this R^2 might not be a good measure of the goodness of fit of the model.

System Weighted R-Square and System Weighted Mean Squared Error

The system weighted R^2 , printed for the 3SLS, IT3SLS, SUR, ITSUR, and FIML methods, is computed as follows.

$$R^2 = \mathbf{Y}'\mathbf{W}\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}'\mathbf{W}\mathbf{Y}/\mathbf{Y}'\mathbf{W}\mathbf{Y}$$

In this equation, the matrix $\mathbf{X}'\mathbf{X}$ is $\mathbf{R}'\mathbf{W}\mathbf{R}$ and \mathbf{W} is the projection matrix of the instruments:

$$\mathbf{W} = \mathbf{S}^{-1} \otimes \mathbf{Z}(\mathbf{Z}'\mathbf{Z})^{-1}\mathbf{Z}'$$

The matrix \mathbf{Z} is the instrument set, \mathbf{R} is the regressor set, and \mathbf{S} is the estimated cross-model covariance matrix.

The system weighted MSE, printed for the 3SLS, IT3SLS, SUR, ITSUR, and FIML methods, is computed as follows:

$$MSE = \frac{1}{tdf}(\mathbf{Y}'\mathbf{W}\mathbf{Y} - \mathbf{Y}'\mathbf{W}\mathbf{R}(\mathbf{X}'\mathbf{X})^{-1}\mathbf{R}'\mathbf{W}\mathbf{Y})$$

In this equation, tdf is the sum of the error degrees of freedom for the equations in the system.

Computational Details

This section discusses various computational details.

Computation of Least Squares-Based Estimators

Let the system be composed of G equations and let the i th equation be expressed in this form:

$$y_i = Y_i \beta_i + X_i \gamma_i + \mathbf{u}$$

where

y_i is the vector of observations on the dependent variable

Y_i is the matrix of observations on the endogenous variables included in the equation

β_i is the vector of parameters associated with Y_i

X_i is the matrix of observations on the predetermined variables included in the equation

γ_i is the vector of parameters associated with X_i

\mathbf{u} is a vector of errors

Let $\hat{V}_i = Y_i - \hat{Y}_i$, where \hat{Y}_i is the projection of Y_i onto the space spanned by the instruments matrix \mathbf{Z} .

Let

$$\delta_i = \begin{bmatrix} \beta_i \\ \gamma_i \end{bmatrix}$$

be the vector of parameters associated with both the endogenous and exogenous variables.

The K-class of estimators (Theil 1971) is defined by

$$\hat{\delta}_{i,k} = \begin{bmatrix} Y_i' Y_i - k \hat{V}_i' \hat{V}_i & Y_i' X_i \\ X_i' Y_i & X_i' X_i \end{bmatrix}^{-1} \begin{bmatrix} (Y_i - k \hat{V}_i)' y_i \\ X_i' y_i \end{bmatrix}$$

where k is a user-defined value.

Let

$$\mathbf{R} = [Y_i X_i]$$

and

$$\hat{\mathbf{R}} = [\hat{Y}_i X_i]$$

The 2SLS estimator is defined as

$$\hat{\delta}_{i,2SLS} = [\hat{R}_i' \hat{R}_i]^{-1} \hat{R}_i' y_i$$

Let \mathbf{y} and $\boldsymbol{\delta}$ be the vectors obtained by stacking the vectors of dependent variables and parameters for all G equations, and let \mathbf{R} and $\hat{\mathbf{R}}$ be the block diagonal matrices formed by R_i and \hat{R}_i , respectively.

The SUR and ITSUR estimators are defined as

$$\hat{\boldsymbol{\delta}}_{(IT)SUR} = \left[\mathbf{R}' (\hat{\Sigma}^{-1} \otimes \mathbf{I}) \mathbf{R} \right]^{-1} \mathbf{R}' (\hat{\Sigma}^{-1} \otimes \mathbf{I}) \mathbf{y}$$

while the 3SLS and IT3SLS estimators are defined as

$$\hat{\boldsymbol{\delta}}_{(IT)3SLS} = \left[\hat{\mathbf{R}}' (\hat{\Sigma}^{-1} \otimes \mathbf{I}) \hat{\mathbf{R}} \right]^{-1} \hat{\mathbf{R}}' (\hat{\Sigma}^{-1} \otimes \mathbf{I}) \mathbf{y}$$

where \mathbf{I} is the identity matrix, and $\hat{\Sigma}$ is an estimator of the cross-equation correlation matrix. For 3SLS, $\hat{\Sigma}$ is obtained from the 2SLS estimation, while for SUR it is derived from the OLS estimation. For IT3SLS and ITSUR, it is obtained iteratively from the previous estimation step, until convergence.

Computation of Standard Errors

The VARDEF= option in the PROC SYSLIN statement controls the denominator used in calculating the cross-equation covariance estimates and the parameter standard errors and covariances. The values of the VARDEF= option and the resulting denominator are as follows:

N	uses the number of nonmissing observations.
DF	uses the number of nonmissing observations less the degrees of freedom in the model.
WEIGHT	uses the sum of the observation weights given by the WEIGHTS statement.
WDF	uses the sum of the observation weights given by the WEIGHTS statement less the degrees of freedom in the model.

The VARDEF= option does not affect the model mean squared error, root mean squared error, or R^2 statistics. These statistics are always based on the error degrees of freedom, regardless of the VARDEF= option. The VARDEF= option also does not affect the dependent variable coefficient of variation (CV).

Reduced Form Estimates

The REDUCED option in the PROC SYSLIN statement computes estimates of the reduced form coefficients. The REDUCED option requires that the equation system be square. If there are fewer models than endogenous variables, IDENTITY statements can be used to complete the equation system.

The reduced form coefficients are computed as follows. Represent the equation system, with all endogenous variables moved to the left-hand side of the equations and identities, as

$$\mathbf{B}\mathbf{Y} = \mathbf{\Gamma}\mathbf{X}$$

Here \mathbf{B} is the estimated coefficient matrix for the endogenous variables \mathbf{Y} , and $\mathbf{\Gamma}$ is the estimated coefficient matrix for the exogenous (or predetermined) variables \mathbf{X} .

The system can be solved for \mathbf{Y} as follows, provided \mathbf{B} is square and nonsingular:

$$\mathbf{Y} = \mathbf{B}^{-1} \mathbf{\Gamma} \mathbf{X}$$

The reduced form coefficients are the matrix $\mathbf{B}^{-1} \mathbf{\Gamma}$.

Uncorrelated Errors across Equations

The SDIAG option in the PROC SYSLIN statement computes estimates by assuming uncorrelated errors across equations. As a result, when the SDIAG option is used, the 3SLS estimates are identical to 2SLS estimates, and the SUR estimates are the same as the OLS estimates.

Overidentification Restrictions

The OVERID option in the MODEL statement can be used to test for overidentifying restrictions on parameters of each equation. The null hypothesis is that the predetermined variables that do not appear in any equation have zero coefficients. The alternative hypothesis is that at least one of the assumed zero coefficients is nonzero. The test is approximate and rejects the null hypothesis too frequently for small sample sizes.

The formula for the test is given as follows. Let $y_i = \beta_i \mathbf{Y}_i + \gamma_i \mathbf{Z}_i + e_i$ be the i th equation. \mathbf{Y}_i are the endogenous variables that appear as regressors in the i th equation, and \mathbf{Z}_i are the instrumental variables that appear as regressors in the i th equation. Let N_i be the number of variables in \mathbf{Y}_i and \mathbf{Z}_i .

Let $v_i = y_i - \mathbf{Y}_i \hat{\beta}_i$. Let \mathbf{Z} represent all instrumental variables, T be the total number of observations, and K be the total number of instrumental variables. Define \hat{l} as follows:

$$\hat{l} = \frac{v_i' (\mathbf{I} - \mathbf{Z}_i (\mathbf{Z}_i' \mathbf{Z}_i)^{-1} \mathbf{Z}_i') v_i}{v_i' (\mathbf{I} - \mathbf{Z} (\mathbf{Z}' \mathbf{Z})^{-1} \mathbf{Z}') v_i}$$

Then the test statistic

$$\frac{T - K}{K - N_i} (\hat{l} - 1)$$

is distributed approximately as an F with $K - N_i$ and $T - K$ degrees of freedom. See Basmann (1960) for more information.

Fuller's Modification to LIML

The ALPHA= option in the PROC SYSLIN and MODEL statements parameterizes Fuller's modification to LIML. This modification is $k = \gamma - (\alpha/(n - g))$, where α is the value of the ALPHA= option, γ is the LIML k value, n is the number of observations, and g is the number of predetermined variables. Fuller's modification is not used unless the ALPHA= option is specified. See Fuller (1977) for more information.

Missing Values

Observations that have a missing value for any variable in the analysis are excluded from the computations.

OUT= Data Set

The output SAS data set produced by the OUT= option in the PROC SYSLIN statement contains all the variables in the input data set and the variables that contain predicted values and residuals specified by OUTPUT statements.

The residuals are computed as actual values minus predicted values. Predicted values never use lags of other predicted values, as would be desirable for dynamic simulation. For these applications, PROC SIMLIN is available to predict or simulate values from the estimated equations.

OUTEST= Data Set

The OUTEST= option produces a TYPE=EST output SAS data set that contains estimates from the regressions. The variables in the OUTEST= data set are as follows:

BY variables	identifies the BY statement variables that are included in the OUTEST= data set.
TYPE	identifies the estimation type for the observations. The _TYPE_ value INST indicates first-stage regression estimates. Other values indicate the estimation method used: 2SLS indicates two-stage least squares results, 3SLS indicates three-stage least squares results, LIML indicates limited information maximum likelihood results, and so forth. Observations added by IDENTITY statements have the _TYPE_ value IDENTITY.
STATUS	identifies the convergence status of the estimation. _STATUS_ equals 0 when convergence criteria are met. Otherwise, _STATUS_ equals 1 when the estimation converges with a note, 2 when it converges with a warning, or 3 when it fails to converge.
MODEL	identifies the model label. The model label is the label specified in the MODEL statement or the dependent variable name if no label is specified. For first-stage regression estimates, _MODEL_ has the value FIRST.
DEPVAR	identifies the name of the dependent variable for the model.
NAME	identifies the names of the regressors for the rows of the covariance matrix, if the COVOUT option is specified. _NAME_ has a blank value for the parameter estimates observations. The _NAME_ variable is not included in the OUTEST= data set unless the COVOUT option is used to output the covariance of parameter estimates matrix.
SIGMA	contains the root mean squared error for the model, which is an estimate of the standard deviation of the error term. The _SIGMA_ variable contains the same values reported as Root MSE in the printed output.

INTERCEPT	identifies the intercept parameter estimates.
regressors	identifies the regressor variables from all the MODEL statements that are included in the OUTEST= data set. Variables used in IDENTIFY statements are also included in the OUTEST= data set.

The parameter estimates are stored under the names of the regressor variables. The intercept parameters are stored in the variable INTERCEPT. The dependent variable of the model is given a coefficient of -1 . Variables that are not in a model have missing values for the OUTEST= observations for that model.

Some estimation methods require computation of preliminary estimates. All estimates computed are output to the OUTEST= data set. For each BY group and each estimation, the OUTEST= data set contains one observation for each MODEL or IDENTITY statement. Results for different estimations are identified by the `_TYPE_` variable.

For example, consider the following statements:

```
proc syslin data=a outest=est 3sls;
  by b;
  endogenous y1 y2;
  instruments x1-x4;
  model y1 = y2 x1 x2;
  model y2 = y1 x3 x4;
  identity x1 = x3 + x4;
run;
```

The 3SLS method requires both a preliminary 2SLS stage and preliminary first-stage regressions for the endogenous variable. The OUTEST= data set thus contains three different kinds of estimates. The observations for the first-stage regression estimates have the `_TYPE_` value INST. The observations for the 2SLS estimates have the `_TYPE_` value 2SLS. The observations for the final 3SLS estimates have the `_TYPE_` value 3SLS.

Since there are two endogenous variables in this example, there are two first-stage regressions and two `_TYPE_=INST` observations in the OUTEST= data set. Since there are two model statements, there are two OUTEST= observations with `_TYPE_=2SLS` and two observations with `_TYPE_=3SLS`. In addition, the OUTEST= data set contains an observation with the `_TYPE_` value IDENTITY that contains the coefficients specified by the IDENTITY statement. All these observations are repeated for each BY group in the input data set defined by the values of the BY variable B.

When the COVOUT option is specified, the estimated covariance matrix for the parameter estimates is included in the OUTEST= data set. Each observation for parameter estimates is followed by observations that contain the rows of the parameter covariance matrix for that model. The row of the covariance matrix is identified by the variable `_NAME_`. For observations that contain parameter estimates, `_NAME_` is blank. For covariance observations, `_NAME_` contains the regressor name for the row of the covariance matrix and the regressor variables contain the covariances.

See [Example 29.1](#) for an example of the OUTEST= data set.

OUTSSCP= Data Set

The OUTSSCP= option produces a TYPE=SSCP output SAS data set that contains sums of squares and cross products. The data set contains all variables used in the MODEL, IDENTITY, and VAR statements. Observations are identified by the variable _NAME_.

The OUTSSCP= data set can be useful when a large number of observations are to be explored in many different SYSLIN runs. The sum-of-squares-and-crossproducts matrix can be saved with the OUTSSCP= option and used as the DATA= data set on subsequent SYSLIN runs. This is much less expensive computationally because PROC SYSLIN never reads the original data again. In the step that creates the OUTSSCP= data set, include in the VAR statement all the variables you expect to use.

Printed Output

The printed output produced by the SYSLIN procedure is as follows:

1. If the SIMPLE option is used, a table of descriptive statistics is printed that shows the sum, mean, sum of squares, variance, and standard deviation for all the variables used in the models.
2. If the FIRST option is specified and an instrumental variables method is used, first-stage regression results are printed. The results show the regression of each endogenous variable on the variables in the INSTRUMENTS list.
3. The results of the second-stage regression are printed for each model. (See the following section [“Printed Output for Each Model”](#) on page 1920 for details.)
4. If a systems method like 3SLS, SUR, or FIML is used, the cross-equation error covariance matrix is printed. This matrix is shown four ways: the covariance matrix itself, the correlation matrix form, the inverse of the correlation matrix, and the inverse of the covariance matrix.
5. If a systems method like 3SLS, SUR, or FIML is used, the system weighted mean squared error and system weighted R^2 statistics are printed. The system weighted MSE and R^2 measure the fit of the joint model obtained by stacking all the models together and performing a single regression with the stacked observations weighted by the inverse of the model error variances.
6. If a systems method like 3SLS, SUR, or FIML is used, the final results are printed for each model.
7. If the REDUCED option is used, the reduced form coefficients are printed. These consist of the structural coefficient matrix for the endogenous variables, the structural coefficient matrix for the exogenous variables, the inverse of the endogenous coefficient matrix, and the reduced form coefficient matrix. The reduced form coefficient matrix is the product of the inverse of the endogenous coefficient matrix and the exogenous structural coefficient matrix.

Printed Output for Each Model

The results printed for each model include the analysis-of-variance table, the “Parameter Estimates” table, and optional items requested by TEST statements or by options in the MODEL statement.

The printed output produced for each model is described in the following.

The analysis-of-variance table includes the following:

- the model degrees of freedom, sum of squares, and mean square
- the error degrees of freedom, sum of squares, and mean square. The error mean square is computed by dividing the error sum of squares by the error degrees of freedom and is not affected by the VARDEF= option.
- the corrected total degrees of freedom and total sum of squares. Note that for instrumental variables methods, the model and error sums of squares do not add to the total sum of squares.
- the F ratio, labeled “F Value,” and its significance, labeled “PROB>F,” for the test of the hypothesis that all the nonintercept parameters are 0
- the root mean squared error. This is the square root of the error mean square.
- the dependent variable mean
- the coefficient of variation (CV) of the dependent variable
- the R^2 statistic. This R^2 is computed consistently with the calculation of the F statistic. It is valid for hypothesis tests but might not be a good measure of fit for models estimated by instrumental variables methods.
- the R^2 statistic adjusted for model degrees of freedom, labeled “Adj R-SQ”

The “Parameter Estimates” table includes the following:

- estimates of parameters for regressors in the model and the Lagrangian parameter for each restriction specified
- a degrees of freedom column labeled DF. Estimated model parameters have 1 degree of freedom. Restrictions have a DF of –1. Regressors or restrictions dropped from the model due to collinearity have a DF of 0.
- the standard errors of the parameter estimates
- the t statistics, which are the parameter estimates divided by the standard errors
- the significance of the t tests for the hypothesis that the true parameter is 0, labeled “Pr > |t|.” As previously noted, the significance tests are strictly valid in finite samples only for OLS estimates but are asymptotically valid for the other methods.

- the standardized regression coefficients, if the STB option is specified. This is the parameter estimate multiplied by the ratio of the standard deviation of the regressor to the standard deviation of the dependent variable.
- the labels of the regressor variables or restriction labels

In addition to the analysis-of-variance table and the “Parameter Estimates” table, the results printed for each model can include the following:

- If TEST statements are specified, the test results are printed.
- If the DW option is specified, the Durbin-Watson statistic and first-order autocorrelation coefficient are printed.
- If the OVERID option is specified, the results of Basman’s test for overidentifying restrictions are printed.
- If the PLOT option is used, plots of residual against each regressor are printed.
- If the COVB or CORRB options are specified, the results for each model also include the covariance or correlation matrix of the parameter estimates. For systems methods like 3SLS and FIML, the COVB and CORB output is printed for the whole system after the output for the last model, instead of separately for each model.

The third-stage output for 3SLS, SUR, IT3SLS, ITSUR, and FIML does not include the analysis-of-variance table. When a systems method is used, the second-stage output does not include the optional output, except for the COVB and CORRB matrices.

ODS Table Names

PROC SYSLIN assigns a name to each table it creates. You can use these names to reference the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table. If the estimation method used is 3SLS, IT3SLS, ITSUR or SUR, you can obtain tables by specifying ODS OUTPUT CorrResiduals, InvCorrResiduals, InvCovResiduals.

Table 29.2 ODS Tables Produced in PROC SYSLIN

ODS Table Name	Description	Option
ANOVA	Summary of the SSE, MSE for the equations	default
AugXPXMat	Model crossproducts	XPX or USSCP
AutoCorrStat	Autocorrelation statistics	DW
ConvergenceStatus	Convergence status	default
CorrB	Correlations of parameters	CORRB
CorrResiduals	Correlations of residuals	
CovB	Covariance of parameters	COVB
CovResiduals	Covariance of residuals	

Table 29.2 (continued)

ODS Table Name	Description	Option
EndoMat	Endogenous variables	REDUCED
ExogMat	Exogenous variables	REDUCED
FitStatistics	Statistics of fit	default
InvCorrResiduals	Inverse correlations of residuals	
InvCovResiduals	Inverse covariance of residuals	
InvEndoMat	Inverse endogenous variables	REDUCED
InvXPX	$X'X$ inverse for system	I
IterHistory	Iteration printing	ITPRINT
MissingValues	Missing values generated by the program	default
ModelVars	Name and label for the model	default
ParameterEstimates	Parameter estimates	default
RedMat	Reduced form	REDUCED
SimpleStatistics	Descriptive statistics	SIMPLE
SSCP	Model crossproducts	XPX or USSCP
TestResults	Test for overidentifying restrictions	
Weight	Weighted model statistics	

ODS Graphics

This section describes the use of ODS for creating graphics with the SYSLIN procedure.

ODS Graph Names

PROC SYSLIN assigns a name to each graph it creates using ODS. You can use these names to reference the graphs when you use ODS. The names are listed in [Table 29.3](#).

To request these graphs, you must specify the ODS GRAPHICS statement.

Table 29.3 ODS Graphics Produced by PROC SYSLIN

ODS Graph Name	Plot Description
DiagnosticsPanel	All applicable plots listed below
ActualByPredicted	Predicted versus actual plot
QQPlot	Q-Q plot of residuals
ResidualHistogram	Histogram of the residuals
ResidualPlot	Residual plot

Examples: SYSLIN Procedure

Example 29.1: Klein's Model I Estimated with LIML and 3SLS

This example uses PROC SYSLIN to estimate the classic Klein Model I. For a discussion of this model, see Theil (1971). The following statements read the data.

```
*-----Klein's Model I-----*
| By L.R. Klein, Economic Fluctuations in the United States, 1921-1941 |
| (1950), NY: John Wiley.  A macro-economic model of the U.S. with  |
| three behavioral equations, and several identities. See Theil, p.456. |
*-----*
data klein;
input year c p w i x wp g t k wsum;
    date=mdy(1,1,year);
    format date monyy.;
    y  =c+i+g-t;
    yr =year-1931;
    klag=lag(k);
    plag=lag(p);
    xlag=lag(x);
    label year='Year'
           date='Date'
           c  ='Consumption'
           p  ='Profits'
           w  ='Private Wage Bill'
           i  ='Investment'
           k  ='Capital Stock'
           y  ='National Income'
           x  ='Private Production'
           wsum='Total Wage Bill'
           wp  ='Govt Wage Bill'
           g  ='Govt Demand'
           i  ='Taxes'
           klag='Capital Stock Lagged'
           plag='Profits Lagged'
           xlag='Private Product Lagged'
           yr  ='YEAR-1931';
datalines;
1920      .  12.7      .      .  44.9      .      .      .  182.8      .
1921  41.9  12.4  25.5 -0.2  45.6  2.7  3.9  7.7  182.6  28.2
1922  45.0  16.9  29.3  1.9  50.1  2.9  3.2  3.9  184.5  32.2
1923  49.2  18.4  34.1  5.2  57.2  2.9  2.8  4.7  189.7  37.0
1924  50.6  19.4  33.9  3.0  57.1  3.1  3.5  3.8  192.7  37.0
1925  52.6  20.1  35.4  5.1  61.0  3.2  3.3  5.5  197.8  38.6
1926  55.1  19.6  37.4  5.6  64.0  3.3  3.3  7.0  203.4  40.7
1927  56.2  19.8  37.9  4.2  64.4  3.6  4.0  6.7  207.6  41.5
1928  57.3  21.1  39.2  3.0  64.5  3.7  4.2  4.2  210.6  42.9
1929  57.8  21.7  41.3  5.1  67.0  4.0  4.1  4.0  215.7  45.3
```

... more lines ...

The following statements estimate the Klein model using the limited information maximum likelihood method. In addition, the parameter estimates are written to a SAS data set with the OUTEST= option.

```
proc syslin data=klein outest=b liml;
  endogenous c p w i x wsum k y;
  instruments klag plag xlag wp g t yr;
  consume: model c = p plag wsum;
  invest:  model i = p plag klag;
  labor:   model w = x xlag yr;
run;

proc print data=b;
run;
```

The PROC SYSLIN estimates are shown in [Output 29.1.1](#) through [Output 29.1.3](#).

Output 29.1.1 LIML Estimates for Consumption

The SYSLIN Procedure						
Limited-Information Maximum Likelihood Estimation						
Model			CONSUME			
Dependent Variable			c			
Label			Consumption			
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	3	854.3541	284.7847	118.42	<.0001	
Error	17	40.88419	2.404952			
Corrected Total	20	941.4295				
Root MSE		1.55079	R-Square	0.95433		
Dependent Mean		53.99524	Adj R-Sq	0.94627		
Coeff Var		2.87209				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	17.14765	2.045374	8.38	<.0001	Intercept
p	1	-0.22251	0.224230	-0.99	0.3349	Profits
plag	1	0.396027	0.192943	2.05	0.0558	Profits Lagged
wsum	1	0.822559	0.061549	13.36	<.0001	Total Wage Bill

Output 29.1.2 LIML Estimates for Investments

The SYSLIN Procedure						
Limited-Information Maximum Likelihood Estimation						
Model		INVEST				
Dependent Variable		i				
Label		Taxes				
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	3	210.3790	70.12634	34.06	<.0001	
Error	17	34.99649	2.058617			
Corrected Total	20	252.3267				
Root MSE		1.43479	R-Square	0.85738		
Dependent Mean		1.26667	Adj R-Sq	0.83221		
Coeff Var		113.27274				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	22.59083	9.498146	2.38	0.0294	Intercept
p	1	0.075185	0.224712	0.33	0.7420	Profits
plag	1	0.680386	0.209145	3.25	0.0047	Profits Lagged
klag	1	-0.16826	0.045345	-3.71	0.0017	Capital Stock Lagged

Output 29.1.3 LIML Estimates for Labor

The SYSLIN Procedure					
Limited-Information Maximum Likelihood Estimation					
Model			LABOR		
Dependent Variable			w		
Label			Private Wage Bill		
Analysis of Variance					
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	3	696.1485	232.0495	393.62	<.0001
Error	17	10.02192	0.589525		
Corrected Total	20	794.9095			
Root MSE		0.76781	R-Square	0.98581	
Dependent Mean		36.36190	Adj R-Sq	0.98330	
Coeff Var		2.11156			

Output 29.1.3 *continued*

Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.526187	1.320838	1.16	0.2639	Intercept
x	1	0.433941	0.075507	5.75	<.0001	Private Production
xlag	1	0.151321	0.074527	2.03	0.0583	Private Product Lagged
yr	1	0.131593	0.035995	3.66	0.0020	YEAR-1931

The OUTEST= data set is shown in part in [Output 29.1.4](#). Note that the data set contains the parameter estimates and root mean squared errors, `_SIGMA_`, for the first-stage instrumental regressions as well as the parameter estimates and σ for the LIML estimates for the three structural equations.

Output 29.1.4 The OUTEST= Data Set

Obs	_TYPE_	_STATUS_	_MODEL_	_DEPVAR_	_SIGMA_	Intercept	klag	plag					
1	LIML	0 Converged	CONSUME	c	1.55079	17.1477	.	0.39603					
2	LIML	0 Converged	INVEST	i	1.43479	22.5908	-0.16826	0.68039					
3	LIML	0 Converged	LABOR	w	0.76781	1.5262	.	.					
Obs	xlag	wp	g	t	yr	c	p	w	i	x	wsun	k	y
1	-1	-0.22251	.	.	.	0.82256	.	.
2	0.07518	.	-1
3	0.15132	.	.	.	0.13159	.	.	-1	.	0.43394	.	.	.

The following statements estimate the model using the 3SLS method. The reduced form estimates are produced by the REDUCED option; IDENTITY statements are used to make the model complete.

```
proc syslin data=klein 3sls reduced;
  endogenous c p w i x wsum k y;
  instruments klag plag xlag wp g t yr;
  consume: model c = p plag wsum;
  invest: model i = p plag klag;
  labor: model w = x xlag yr;
  product: identity x = c + i + g;
  income: identity y = c + i + g - t;
  profit: identity p = y - w;
  stock: identity k = klag + i;
  wage: identity wsum = w + wp;
run;
```

The preliminary 2SLS results and estimated cross-model covariance matrix are not shown. The 3SLS estimates are shown in [Output 29.1.5](#) through [Output 29.1.7](#). The reduced form estimates are shown in [Output 29.1.8](#) through [Output 29.1.11](#).

Output 29.1.5 3SLS Estimates for Consumption

The SYSLIN Procedure						
Three-Stage Least Squares Estimation						
System Weighted MSE		5.9342				
Degrees of freedom		51				
System Weighted R-Square		0.9550				
Model		CONSUME				
Dependent Variable		c				
Label		Consumption				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	16.44079	1.449925	11.34	<.0001	Intercept
p	1	0.124890	0.120179	1.04	0.3133	Profits
plag	1	0.163144	0.111631	1.46	0.1621	Profits Lagged
wsum	1	0.790081	0.042166	18.74	<.0001	Total Wage Bill

Output 29.1.6 3SLS Estimates for Investments

		Model	INVEST			
		Dependent Variable	i			
		Label	Taxes			
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	28.17785	7.550853	3.73	0.0017	Intercept
p	1	-0.01308	0.179938	-0.07	0.9429	Profits
plag	1	0.755724	0.169976	4.45	0.0004	Profits Lagged
klag	1	-0.19485	0.036156	-5.39	<.0001	Capital Stock Lagged

Output 29.1.7 3SLS Estimates for Labor

Model		LABOR				
Dependent Variable		w				
Label		Private Wage Bill				

Output 29.1.7 *continued*

Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	1.797218	1.240203	1.45	0.1655	Intercept
x	1	0.400492	0.035359	11.33	<.0001	Private Production
xlag	1	0.181291	0.037965	4.78	0.0002	Private Product Lagged
yr	1	0.149674	0.031048	4.82	0.0002	YEAR-1931

Output 29.1.8 Reduced Form Estimates

Endogenous Variables				
	c	p	w	i
CONSUME	1	-0.12489	0	0
INVEST	0	0.013079	0	1
LABOR	0	0	1	0
PRODUCT	-1	0	0	-1
INCOME	-1	0	0	-1
PROFIT	0	1	1	0
STOCK	0	0	0	-1
WAGE	0	0	-1	0

Endogenous Variables				
	x	wsum	k	y
CONSUME	0	-0.79008	0	0
INVEST	0	0	0	0
LABOR	-0.40049	0	0	0
PRODUCT	1	0	0	0
INCOME	0	0	0	1
PROFIT	0	0	0	-1
STOCK	0	0	1	0
WAGE	0	1	0	0

Output 29.1.9 Reduced Form Estimates

Exogenous Variables				
	Intercept	plag	klag	xlag
CONSUME	16.44079	0.163144	0	0
INVEST	28.17785	0.755724	-0.19485	0
LABOR	1.797218	0	0	0.181291
PRODUCT	0	0	0	0
INCOME	0	0	0	0
PROFIT	0	0	0	0
STOCK	0	0	1	0
WAGE	0	0	0	0

Exogenous Variables				
	yr	g	t	wp
CONSUME	0	0	0	0
INVEST	0	0	0	0
LABOR	0.149674	0	0	0
PRODUCT	0	1	0	0
INCOME	0	1	-1	0
PROFIT	0	0	0	0
STOCK	0	0	0	0
WAGE	0	0	0	1

Output 29.1.10 Reduced Form Estimates

Inverse Endogenous Variables				
	CONSUME	INVEST	LABOR	PRODUCT
c	1.634654	0.634654	1.095657	0.438802
p	0.972364	0.972364	-0.34048	-0.13636
w	0.649572	0.649572	1.440585	0.576943
i	-0.01272	0.987282	0.004453	0.001783
x	1.621936	1.621936	1.10011	1.440585
wsum	0.649572	0.649572	1.440585	0.576943
k	-0.01272	0.987282	0.004453	0.001783
y	1.621936	1.621936	1.10011	0.440585

Inverse Endogenous Variables				
	INCOME	PROFIT	STOCK	WAGE
c	0.195852	0.195852	0	1.291509
p	1.108721	1.108721	0	0.768246
w	0.072629	0.072629	0	0.513215
i	-0.0145	-0.0145	0	-0.01005
x	0.181351	0.181351	0	1.281461
wsum	0.072629	0.072629	0	1.513215
k	-0.0145	-0.0145	1	-0.01005
y	1.181351	0.181351	0	1.281461

Output 29.1.11 Reduced Form Estimates

Reduced Form				
	Intercept	plag	klag	xlag
c	46.7273	0.746307	-0.12366	0.198633
p	42.77363	0.893474	-0.18946	-0.06173
w	31.57207	0.596871	-0.12657	0.261165
i	27.6184	0.744038	-0.19237	0.000807
x	74.3457	1.490345	-0.31603	0.19944
wsum	31.57207	0.596871	-0.12657	0.261165
k	27.6184	0.744038	0.80763	0.000807
y	74.3457	1.490345	-0.31603	0.19944

Reduced Form				
	yr	g	t	wp
c	0.163991	0.634654	-0.19585	1.291509
p	-0.05096	0.972364	-1.10872	0.768246
w	0.215618	0.649572	-0.07263	0.513215
i	0.000667	-0.01272	0.014501	-0.01005
x	0.164658	1.621936	-0.18135	1.281461
wsum	0.215618	0.649572	-0.07263	1.513215
k	0.000667	-0.01272	0.014501	-0.01005
y	0.164658	1.621936	-1.18135	1.281461

Example 29.2: Grunfeld's Model Estimated with SUR

The following example was used by Zellner in his classic 1962 paper on seemingly unrelated regressions. Different stock prices often move in the same direction at a given point in time. The SUR technique might provide more efficient estimates than OLS in this situation.

The following statements read the data. (The prefix GE stands for General Electric and WH stands for Westinghouse.)

```
*-----Zellner's Seemingly Unrelated Technique-----*
| A. Zellner, "An Efficient Method of Estimating Seemingly |
| Unrelated Regressions and Tests for Aggregation Bias," |
| JASA 57(1962) pp.348-364 |
| |
| J.C.G. Boot, "Investment Demand: an Empirical Contribution |
| to the Aggregation Problem," IER 1(1960) pp.3-30. |
| |
| Y. Grunfeld, "The Determinants of Corporate Investment," |
| Unpublished thesis, Chicago, 1958 |
*-----*

data grunfeld;
  input year ge_i ge_f ge_c wh_i wh_f wh_c;
```

```

label ge_i = 'Gross Investment, GE'
      ge_c = 'Capital Stock Lagged, GE'
      ge_f = 'Value of Outstanding Shares Lagged, GE'
      wh_i = 'Gross Investment, WH'
      wh_c = 'Capital Stock Lagged, WH'
      wh_f = 'Value of Outstanding Shares Lagged, WH';
datalines;

... more lines ...

```

The following statements compute the SUR estimates for the Grunfeld model.

```

proc syslin data=grunfeld sur;
  ge:      model ge_i = ge_f ge_c;
  westing: model wh_i = wh_f wh_c;
run;

```

The PROC SYSLIN output is shown in [Output 29.2.1](#) through [Output 29.2.5](#).

Output 29.2.1 PROC SYSLIN Output for SUR

The SYSLIN Procedure						
Ordinary Least Squares Estimation						
Model		GE				
Dependent Variable		ge_i				
Label		Gross Investment, GE				
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	2	31632.03	15816.02	20.34	<.0001	
Error	17	13216.59	777.4463			
Corrected Total	19	44848.62				
Root MSE		27.88272	R-Square	0.70531		
Dependent Mean		102.29000	Adj R-Sq	0.67064		
Coeff Var		27.25850				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-9.95631	31.37425	-0.32	0.7548	Intercept
ge_f	1	0.026551	0.015566	1.71	0.1063	Value of Outstanding Shares Lagged, GE
ge_c	1	0.151694	0.025704	5.90	<.0001	Capital Stock Lagged, GE

Output 29.2.2 PROC SYSLIN Output for SUR

The SYSLIN Procedure						
Ordinary Least Squares Estimation						
Model		WESTING				
Dependent Variable		wh_i				
Label		Gross Investment, WH				
Analysis of Variance						
Source	DF	Sum of Squares	Mean Square	F Value	Pr > F	
Model	2	5165.553	2582.776	24.76	<.0001	
Error	17	1773.234	104.3079			
Corrected Total	19	6938.787				
Root MSE		10.21312	R-Square	0.74445		
Dependent Mean		42.89150	Adj R-Sq	0.71438		
Coeff Var		23.81153				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-0.50939	8.015289	-0.06	0.9501	Intercept
wh_f	1	0.052894	0.015707	3.37	0.0037	Value of Outstanding Shares Lagged, WH
wh_c	1	0.092406	0.056099	1.65	0.1179	Capital Stock Lagged, WH

Output 29.2.3 PROC SYSLIN Output for SUR

The SYSLIN Procedure			
Seemingly Unrelated Regression Estimation			
Cross Model Covariance			
	GE	WESTING	
GE	777.446	207.587	
WESTING	207.587	104.308	
Cross Model Correlation			
	GE	WESTING	
GE	1.00000	0.72896	
WESTING	0.72896	1.00000	

Output 29.2.3 *continued*

Cross Model Inverse Correlation			
	GE	WESTING	
GE	2.13397	-1.55559	
WESTING	-1.55559	2.13397	
Cross Model Inverse Covariance			
	GE	WESTING	
GE	0.002745	-.005463	
WESTING	-.005463	0.020458	

Output 29.2.4 PROC SYSLIN Output for SUR

System Weighted MSE	0.9719					
Degrees of freedom	34					
System Weighted R-Square	0.6284					
Model	GE					
Dependent Variable	ge_i					
Label	Gross Investment, GE					
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-27.7193	29.32122	-0.95	0.3577	Intercept
ge_f	1	0.038310	0.014415	2.66	0.0166	Value of Outstanding Shares Lagged, GE
ge_c	1	0.139036	0.024986	5.56	<.0001	Capital Stock Lagged, GE

Output 29.2.5 PROC SYSLIN Output for SUR

Model		WESTING				
Dependent Variable		wh_i				
Label		Gross Investment, WH				
Parameter Estimates						
Variable	DF	Parameter Estimate	Standard Error	t Value	Pr > t	Variable Label
Intercept	1	-1.25199	7.545217	-0.17	0.8702	Intercept
wh_f	1	0.057630	0.014546	3.96	0.0010	Value of Outstanding Shares Lagged, WH
wh_c	1	0.063978	0.053041	1.21	0.2443	Capital Stock Lagged, WH

Example 29.3: Illustration of ODS Graphics

This example illustrates the use of ODS graphics. This is a continuation of the section “[Example 29.1: Klein’s Model I Estimated with LIML and 3SLS](#)” on page 1923. These graphical displays are requested by specifying the ODS GRAPHICS statement before running PROC SYSLIN. For information about the graphics available in the SYSLIN procedure, see the section “[ODS Graphics](#)” on page 1922.

The following statements show how to generate ODS graphics plots with the SYSLIN procedure. The plots of residuals for each one of the equations in the model are displayed in [Figure 29.3.1](#) through [Figure 29.3.3](#).

```

*-----Klein's Model I-----*
| By L.R. Klein, Economic Fluctuations in the United States, 1921-1941 |
| (1950), NY: John Wiley. A macro-economic model of the U.S. with |
| three behavioral equations, and several identities. See Theil, p.456. |
*-----*
data klein;
input year c p w i x wp g t k wsum;
  date=mdy(1,1,year);
  format date monyy.;
  y  =c+i+g-t;
  yr =year-1931;
  klag=lag(k);
  plag=lag(p);
  xlag=lag(x);
  label year='Year'
        date='Date'
        c  ='Consumption'
        p  ='Profits'
        w  ='Private Wage Bill'
        i  ='Investment'
        k  ='Capital Stock'
        y  ='National Income'
        x  ='Private Production'
        wsum='Total Wage Bill'
        wp  ='Govt Wage Bill'
        g  ='Govt Demand'
        i  ='Taxes'
        klag='Capital Stock Lagged'
        plag='Profits Lagged'
        xlag='Private Product Lagged'
        yr  ='YEAR-1931';
datalines;
1920      .      12.7      .      .      44.9      .      .      .      182.8      .
1921  41.9      12.4      25.5     -0.2      45.6      2.7      3.9      7.7      182.6      28.2
1922  45.0      16.9      29.3      1.9      50.1      2.9      3.2      3.9      184.5      32.2
1923  49.2      18.4      34.1      5.2      57.2      2.9      2.8      4.7      189.7      37.0
1924  50.6      19.4      33.9      3.0      57.1      3.1      3.5      3.8      192.7      37.0
1925  52.6      20.1      35.4      5.1      61.0      3.2      3.3      5.5      197.8      38.6
1926  55.1      19.6      37.4      5.6      64.0      3.3      3.3      7.0      203.4      40.7
1927  56.2      19.8      37.9      4.2      64.4      3.6      4.0      6.7      207.6      41.5
1928  57.3      21.1      39.2      3.0      64.5      3.7      4.2      4.2      210.6      42.9
1929  57.8      21.7      41.3      5.1      67.0      4.0      4.1      4.0      215.7      45.3

```

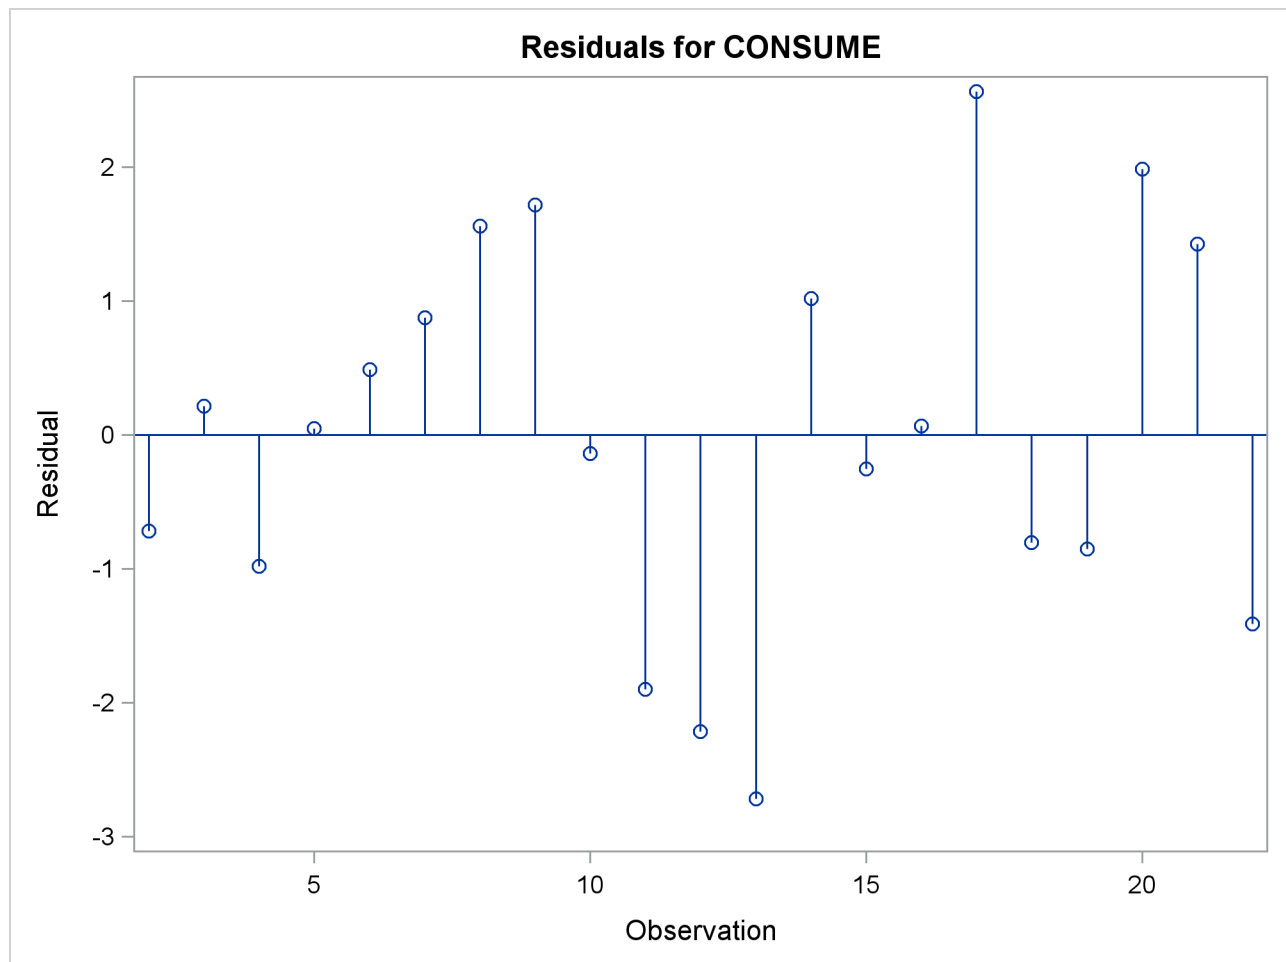


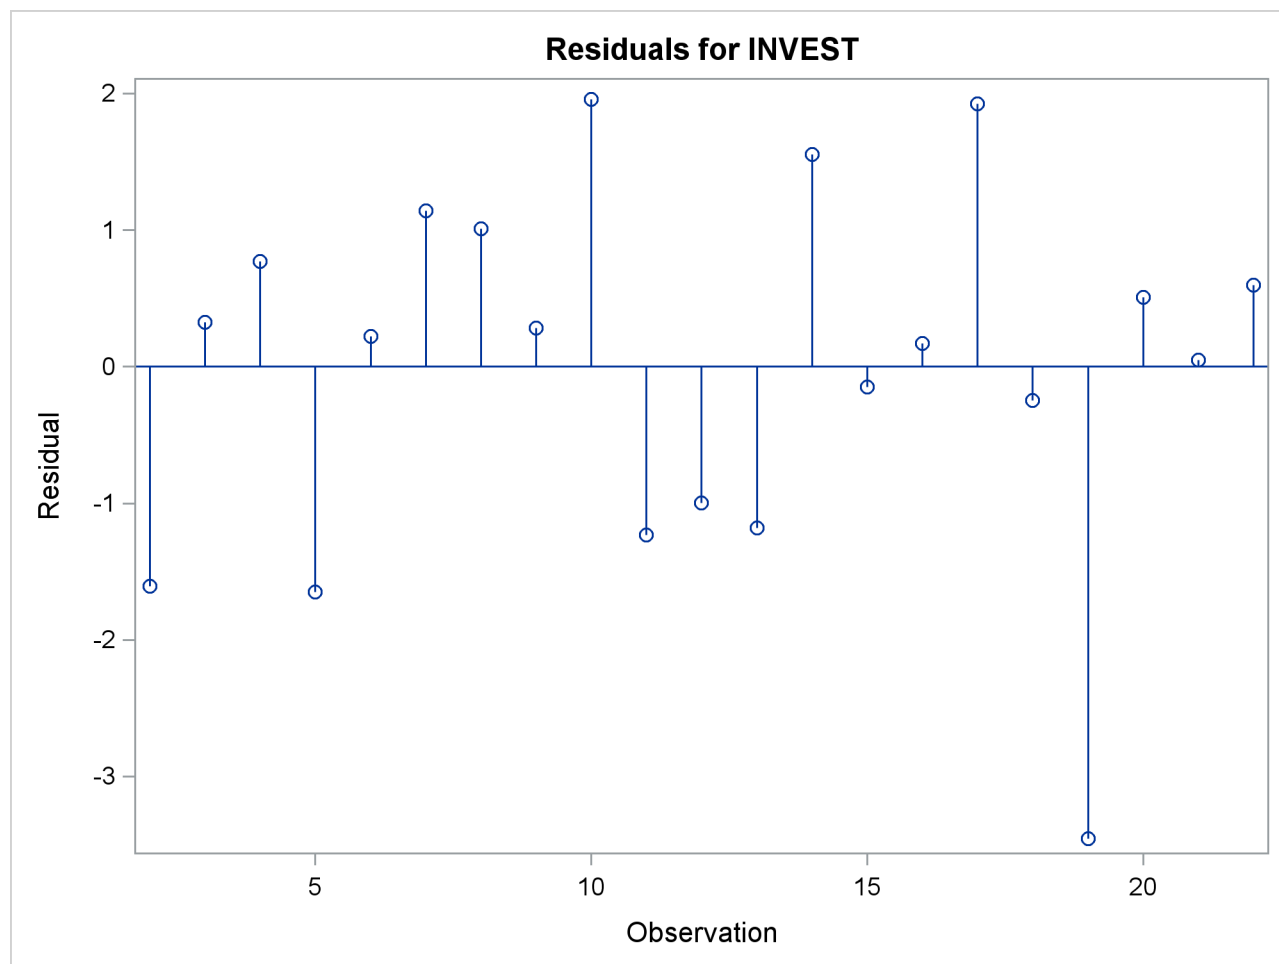
```
... more lines ...
```

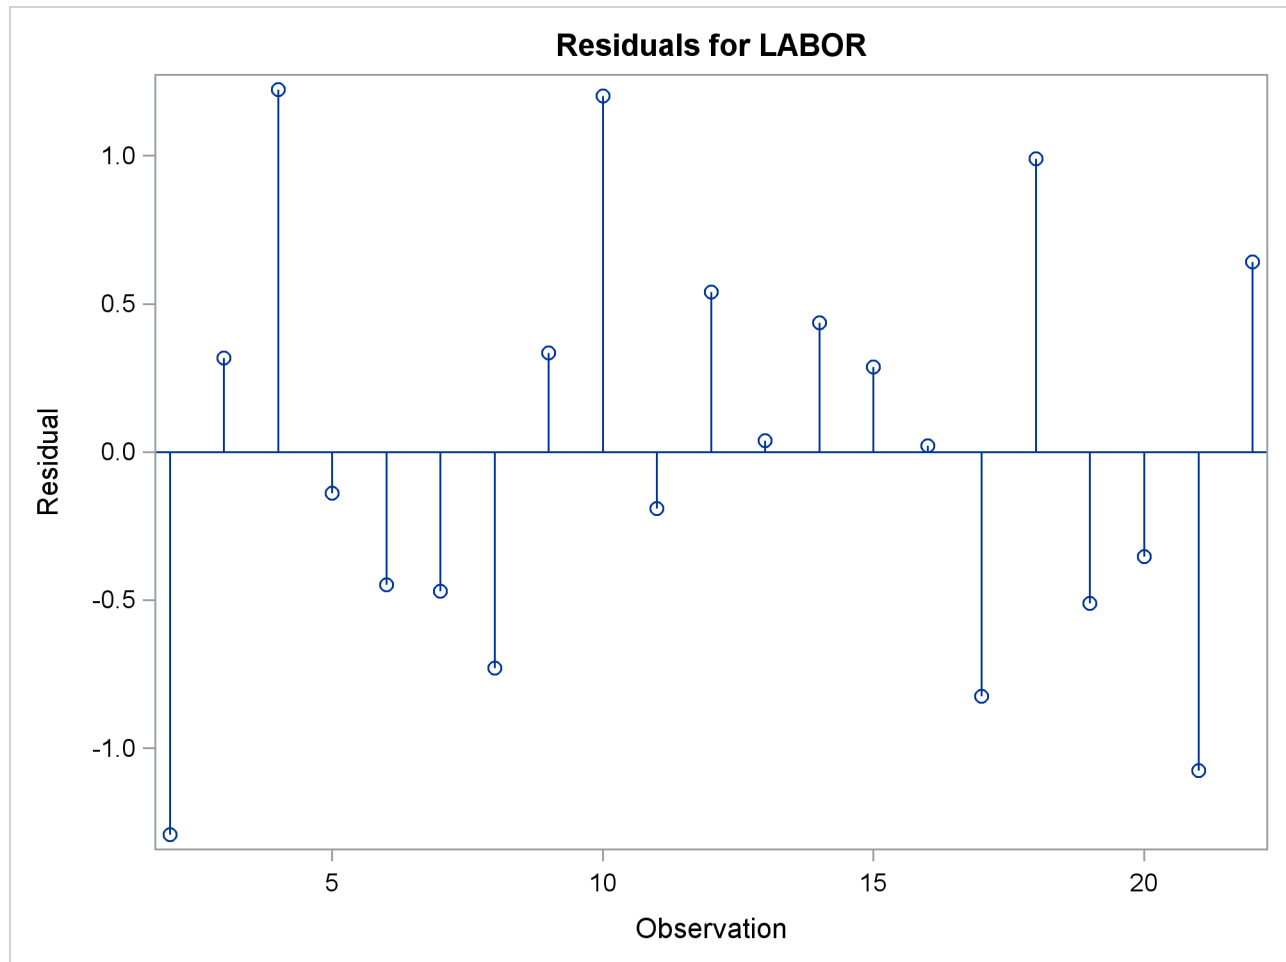
```
ods graphics on;
```

```
proc syslin data=klein outest=b liml plots(unpack only)=residual ;
  endogenous c p w i x wsum k y;
  instruments klag plag xlag wp g t yr;
  consume: model c = p plag wsum;
  invest:  model i = p plag klag;
  labor:   model w = x xlag yr;
run;
```

Output 29.3.1 Residuals Diagnostic Plots for Consumption



Output 29.3.2 Residuals Diagnostic Plots for Investments

Output 29.3.3 Residuals Diagnostic Plots for Labor

References

- Basmann, R.L. (1960), "On Finite Sample Distributions of Generalized Classical Linear Identifiability Test Statistics," *Journal of the American Statistical Association*, 55, 650–659.
- Fuller, W.A. (1977), "Some Properties of a Modification of the Limited Information Estimator," *Econometrica*, 45, 939–952.
- Hausman, J.A. (1975), "An Instrumental Variable Approach to Full Information Estimators for Linear and Certain Nonlinear Econometric Models," *Econometrica*, 43, 727–738.
- Johnston, J. (1984), *Econometric Methods*, Third Edition, New York: McGraw-Hill.
- Judge, George G., W. E. Griffiths, R. Carter Hill, Helmut Lutkepohl, and Tsoung-Chao Lee (1985), *The Theory and Practice of Econometrics*, Second Edition, New York: John Wiley & Sons.
- Maddala, G.S. (1977), *Econometrics*, New York: McGraw-Hill.

Park, S.B. (1982), "Some Sampling Properties of Minimum Expected Loss (MELO) Estimators of Structural Coefficients," *Journal of the Econometrics*, 18, 295–311.

Pindyck, R.S. and Rubinfeld, D.L. (1981), *Econometric Models and Economic Forecasts*, Second Edition, New York: McGraw-Hill.

Pringle, R.M. and Rayner, A.A. (1971), *Generalized Inverse Matrices with Applications to Statistics*, New York: Hafner Publishing Company.

Rao, P. (1974), "Specification Bias in Seemingly Unrelated Regressions," in *Essays in Honor of Tinbergen*, Volume 2, New York: International Arts and Sciences Press.

Savin, N.E. and White, K.J. (1978), "Testing for Autocorrelation with Missing Observations," *Econometrics*, 46, 59–66.

Theil, H. (1971), *Principles of Econometrics*, New York: John Wiley & Sons.

Zellner, A. (1962), "An Efficient Method of Estimating Seemingly Unrelated Regressions and Tests for Aggregation Bias," *Journal of the American Statistical Association*, 57, 348–368.

Zellner, A. (1978), "Estimation of Functions of Population Means and Regression Coefficients: A Minimum Expected Loss (MELO) Approach," *Journal of the Econometrics*, 8, 127–158.

Zellner, A. and Park, S. (1979), "Minimum Expected Loss (MELO) Estimators for Functions of Parameters and Structural Coefficients of Econometric Models," *Journal of the American Statistical Association*, 74, 185–193.

Chapter 30

The TCOUNTREG Procedure (Experimental)

Contents

Overview: TCOUNTREG Procedure	1940
Getting Started: TCOUNTREG Procedure	1941
Syntax: TCOUNTREG Procedure	1944
Functional Summary	1945
PROC TCOUNTREG Statement	1946
BOUNDS Statement	1947
BY Statement	1948
CLASS Statement	1948
FREQ Statement	1949
ID Statement	1949
INIT Statement	1949
MODEL Statement	1949
NLOPTIONS Statement	1952
OUTPUT Statement	1952
RESTRICT Statement	1953
WEIGHT Statement	1953
ZEROMODEL Statement	1954
Details: TCOUNTREG Procedure	1955
Specification of Regressors	1955
Missing Values	1957
Poisson Regression	1958
Negative Binomial Regression	1959
Zero-Inflated Count Regression Overview	1961
Zero-Inflated Poisson Regression	1962
Zero-Inflated Negative Binomial Regression	1964
Variable Selection	1967
Panel Data Analysis	1970
Computational Resources	1976
Nonlinear Optimization Options	1977
Covariance Matrix Types	1977
Displayed Output	1977
OUTPUT OUT= Data Set	1979
OUTEST= Data Set	1980
ODS Table Names	1980

Examples: TCOUNTREG Procedure	1981
Example 30.1: Basic Models	1981
Example 30.2: ZIP and ZINB Models for Data Exhibiting Extra Zeros	1985
Example 30.3: Variable Selection	1992
References	1996

Overview: TCOUNTREG Procedure

The TCOUNTREG procedure is an experimental version of the COUNTREG procedure. The main difference of the new procedure is the addition of panel estimation and variable selection capabilities.

The TCOUNTREG (count regression) procedure analyzes regression models in which the dependent variable takes nonnegative integer or count values. The dependent variable is usually an *event count*, which refers to the number of times an event occurs. For example, an event count might represent the number of ship accidents per year for a given fleet. In count regression, the conditional mean $E(y_i | \mathbf{x}_i)$ of the dependent variable y_i is assumed to be a function of a vector of covariates \mathbf{x}_i .

The Poisson (log-linear) regression model is the most basic model that explicitly takes into account the nonnegative integer-valued aspect of the outcome. With this model, the probability of an event count is determined by a Poisson distribution, where the conditional mean of the distribution is a function of a vector of covariates. However, the basic Poisson regression model is limited because it forces the conditional mean of the outcome to equal the conditional variance. This assumption is often violated in real-life data. Negative binomial regression is an extension of Poisson regression in which the conditional variance can exceed the conditional mean. Also, an often encountered characteristic of count data is that the number of zeros in the sample exceeds the number of zeros predicted by either the Poisson or negative binomial model. Zero-inflated Poisson (ZIP) and zero-inflated negative binomial (ZINB) models explicitly model the production of zero counts to account for excess zeros and also enable the conditional variance of the outcome to differ from the conditional mean.

Under zero-inflated models, additional zeros occur with probability φ_i , which is determined by a separate model, $\varphi_i = F(\mathbf{z}_i' \boldsymbol{\gamma})$, where F is the normal or logistic distribution function that results in a probit or logistic model and \mathbf{z}_i is a set of covariates.

PROC TCOUNTREG supports the following models for count data:

- Poisson regression
- negative binomial regression with quadratic (NEGBIN2) and linear (NEGBIN1) variance functions (Cameron and Trivedi 1986)
- zero-inflated Poisson (ZIP) model (Lambert 1992)
- zero-inflated negative binomial (ZINB) model
- fixed effects and random effects Poisson models for panel data

- fixed effects and random effects negative binomial models for panel data

In recent years, count data models have been used extensively in economics, political science, and sociology. For example, Hausman, Hall, and Griliches (1984) examine the effects of research and development expenditures on the number of patents received by U.S. companies. Cameron and Trivedi (1986) study factors that affect the number of doctor visits. Greene (1994) studies the number of derogatory reports to a credit reporting agency for a group of credit card applicants. As a final example, Long (1997) analyzes the number of doctoral publications in the final three years of Ph.D. studies.

The TCOUNTREG procedure uses maximum likelihood estimation. When a model with a dependent count variable is estimated using linear ordinary least squares (OLS) regression, the count nature of the dependent variable is ignored. This can lead to negative predicted counts and to parameter estimates with undesirable properties in terms of statistical efficiency, consistency, and unbiasedness unless the mean of the counts is high, in which case the Gaussian approximation and linear regression might be satisfactory.

Getting Started: TCOUNTREG Procedure

The TCOUNTREG procedure is similar in use to other regression model procedures in the SAS System. For example, the following statements are used to estimate a Poisson regression model:

```
proc tcountreg data=one ;
    model y = x / dist=poisson ;
run;
```

The response variable *y* is numeric and has nonnegative integer values. To allow for variance greater than the mean, specify the DIST=NEGBIN option to fit the negative binomial model instead of the Poisson.

The following example illustrates the use of PROC TCOUNTREG. The data are taken from Long (1997) and can be found in the SAS/ETS Sample Library. This study examines how factors such as gender (*fem*), marital status (*mar*), number of young children (*kid5*), prestige of the graduate program (*phd*), and number of articles published by a scientist's mentor (*ment*) affect the number of articles (*art*) published by the scientist.

The first 10 observations are shown in [Figure 30.1](#).

Figure 30.1 Article Count Data

Obs	art	fem	mar	kid5	phd	ment
1	3	0	1	2	1.38000	8.0000
2	0	0	0	0	4.29000	7.0000
3	4	0	0	0	3.85000	47.0000
4	1	0	1	1	3.59000	19.0000
5	1	0	1	0	1.81000	0.0000
6	1	0	1	1	3.59000	6.0000
7	0	0	1	1	2.12000	10.0000
8	0	0	1	0	4.29000	2.0000
9	3	0	1	2	2.58000	2.0000
10	3	0	1	1	1.80000	4.0000

The following SAS statements estimate the Poisson regression model:

```
proc tcountreg data=long97data;
  model art = fem mar kid5 phd ment / dist=poisson;
run;
```

The “Model Fit Summary” table, shown in [Figure 30.2](#), lists several details about the model. By default, the TCOUNTREG procedure uses the Newton-Raphson optimization technique. The maximum log-likelihood value is shown, in addition to two information measures, Akaike’s information criterion (AIC) and Schwarz’s Bayesian information criterion (SBC), which can be used to compare competing Poisson models. Smaller values of these criteria indicate better models.

Figure 30.2 Estimation Summary Table for a Poisson Regression

The TCOUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	Poisson
Log Likelihood	-1651
Maximum Absolute Gradient	3.5741E-9
Number of Iterations	5
Optimization Method	Newton-Raphson
AIC	3314
SBC	3343

The parameter estimates of the model and their standard errors are shown in [Figure 30.3](#). All covariates are significant predictors of the number of articles, except for the prestige of the program (phd), which has a p -value of 0.6271.

Figure 30.3 Parameter Estimates of Poisson Regression

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.304617	0.102982	2.96	0.0031
fem	1	-0.224594	0.054614	-4.11	<.0001
mar	1	0.155243	0.061375	2.53	0.0114
kid5	1	-0.184883	0.040127	-4.61	<.0001
phd	1	0.012823	0.026397	0.49	0.6271
ment	1	0.025543	0.002006	12.73	<.0001

The following statements fit the negative binomial model. Although the Poisson model requires that the conditional mean and conditional variance be equal, the negative binomial model allows for overdispersion; that is, the conditional variance can exceed the conditional mean.

```
proc tcountreg data=long97data;
  model art = fem mar kid5 phd ment / dist=negbin(p=2) method=qn;
run;
```

The fit summary is shown in [Figure 30.4](#), and parameter estimates are listed in [Figure 30.5](#).

Figure 30.4 Estimation Summary Table for a Negative Binomial Regression

The TCOUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	NegBin
Log Likelihood	-1561
Maximum Absolute Gradient	1.75584E-6
Number of Iterations	16
Optimization Method	Quasi-Newton
AIC	3136
SBC	3170

Figure 30.5 Parameter Estimates of Negative Binomial Regression

Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.256144	0.138560	1.85	0.0645
fem	1	-0.216418	0.072672	-2.98	0.0029
mar	1	0.150489	0.082106	1.83	0.0668
kid5	1	-0.176415	0.053060	-3.32	0.0009
phd	1	0.015271	0.036040	0.42	0.6718
ment	1	0.029082	0.003470	8.38	<.0001
_Alpha	1	0.441620	0.052967	8.34	<.0001

The parameter estimate for `_Alpha` of 0.4416 is an estimate of the dispersion parameter in the negative binomial distribution. A t test for the hypothesis $H_0 : \alpha = 0$ is provided. It is highly significant, indicating overdispersion ($p < 0.0001$).

The null hypothesis $H_0 : \alpha = 0$ can be also tested against the alternative $\alpha > 0$ by using the likelihood ratio test, as described by Cameron and Trivedi (1998, pp. 45, 77–78). The likelihood ratio test statistic is equal to $-2(\mathcal{L}_P - \mathcal{L}_{NB}) = -2(-1651 + 1561) = 180$, where \mathcal{L}_P and \mathcal{L}_{NB} are the log likelihoods for the Poisson and negative binomial models, respectively. The likelihood ratio test is highly significant, providing strong evidence of overdispersion.

Syntax: TCOUNTREG Procedure

The TCOUNTREG procedure is controlled by the following statements:

```

PROC TCOUNTREG < options > ;
  BOUNDS bound1 < , bound2 ... > ;
  BY variables ;
  CLASS variables ;
  FREQ variable ;
  ID variable ;
  INIT initvalue1 < , initvalue2 ... > ;
  MODEL dependent = < regressors > < / options > ;
  NLOPTIONS < options > ;
  OUTPUT < OUT=SAS-data-set > < output-options > ;
  RESTRICT restriction1 < , restriction2 ... > ;
  WEIGHT variable < / options > ;
  ZEROMODEL dependent variable ~ < zero-inflated regressors > < / options > ;

```

There can only be one **MODEL** statement. The **ZEROMODEL** statement, if used, must appear after the **MODEL** statement, and the **CLASS** statement must precede the **MODEL** statement. If a **FREQ** or **WEIGHT** statement is specified more than once, the variable specified in the first instance is used.

Functional Summary

Table 30.1 summarizes statements and options used with the TCOUNTREG procedure.

Table 30.1 TCOUNTREG Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	TCOUNTREG	DATA=
Writes parameter estimates to an output data set	TCOUNTREG	OUTEST=
Writes estimates of $\mathbf{x}_i'\boldsymbol{\beta}$ and $\mathbf{z}_i'\boldsymbol{\gamma}$ to an output data set	OUTPUT	OUT=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies classification variables	CLASS	
Specifies a frequency variable	FREQ	
Specifies a weight variable	WEIGHT	
Specifies the ID variable for panel data analysis	ID	
Printing Control Options		
Prints the correlation matrix of the estimates	MODEL	CORRB
Prints the covariance matrix of the estimates	MODEL	COVB
Prints a summary iteration listing	MODEL	ITPRINT
Suppresses the normal printed output	TCOUNTREG	NOPRINT
Requests all printing options	MODEL	PRINTALL
Options to Control the Optimization Process		
Specifies maximum number of iterations allowed	MODEL	MAXITER=
Selects the iterative minimization method to use	TCOUNTREG	METHOD=
Sets boundary restrictions on parameters	BOUNDS	
Sets initial values for parameters	INIT	
Sets linear restrictions on parameters	RESTRICT	
Specifies the optimization options	NLOPTIONS	See Chapter 6, “Non-linear Optimization Methods”
Model Estimation Options		
Specifies the type of model	MODEL	DIST=
Specifies the type of model	TCOUNTREG	DIST=
Specifies the type of covariance matrix	MODEL	COVEST=
Specifies the type of error components model for panel data	MODEL	ERRORCOMP=
Suppresses the intercept parameter	MODEL	NOINT
Specifies the offset variable	MODEL	OFFSET=
Specifies the zero-inflated offset variable	ZEROMODEL	OFFSET=

Description	Statement	Option
Specifies the zero-inflated link function	ZEROMODEL	LINK=
Specifies variable selection	MODEL	SELECT=()
Output Control Options		
Includes covariances in the OUTEST= data set	TCOUNTREG	COVOUT
Outputs the probability of response variable taking the current value	OUTPUT	PROB=
Outputs probabilities for particular response values	OUTPUT	PROBCOUNT()
Outputs expected value of response variable	OUTPUT	PRED=
Outputs estimates of $\mathbf{X}\beta = \mathbf{x}_i' \boldsymbol{\beta}$	OUTPUT	XBETA=
Outputs estimates of $\mathbf{Z}\gamma = \mathbf{z}_i' \boldsymbol{\gamma}$	OUTPUT	ZGAMMA=
Outputs the probability of the response variable taking a zero value as a result of the zero-generating process	OUTPUT	PROBZERO=

PROC TCOUNTREG Statement

PROC TCOUNTREG <options> ;

The following options can be used in the PROC TCOUNTREG statement:

Data Set Options

DATA=SAS-data-set

specifies the input SAS data set. If the DATA= option is not specified, PROC TCOUNTREG uses the most recently created SAS data set.

Output Data Set Options

OUTEST=SAS-data-set

writes the parameter estimates to the specified output data set.

COVOUT

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

Printing Options

NOPRINT

suppresses all printed output.

CORRB

prints the correlation matrix of the parameter estimates. This option can also be specified in the MODEL statement.

COVB

prints the covariance matrix of the parameter estimates. This option can also be specified in the MODEL statement.

Estimation Control Options

COVEST=*value*

specifies the type of covariance matrix of the parameter estimates. The quasi-maximum-likelihood-estimates are computed with COVEST=QML. The default is COVEST=HESSIAN. The supported covariance types are as follows:

OP	specifies the covariance from the outer product matrix.
HESSIAN	specifies the covariance from the Hessian matrix.
QML	specifies the covariance from the outer product and Hessian matrices.

Options to Control the Optimization Process

PROC TCOUNTREG uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. All the NLO options are available in the NLOPTIONS statement. For details, see the “[NLOPTIONS Statement](#)” on page 1952. In addition, the following option is supported in the PROC TCOUNTREG statement:

METHOD=*value*

specifies the iterative minimization method to use. The default is METHOD=NRA.

CONGRA	specifies the conjugate-gradient method.
DBLDOG	specifies the double-dogleg method.
QN	specifies the quasi-Newton method.
NMSIMP	specifies Nelder-Mead simplex method.
NRA	specifies the Newton-Raphson method.
NRRIDG	specifies the Newton-Raphson ridge method.
TR	specifies the trust region method.

BOUNDS Statement

BOUNDS *bound1* < , *bound2* ... > ;

The BOUNDS statement imposes simple boundary constraints on the parameter estimates. BOUNDS statement constraints refer to the parameters estimated by the TCOUNTREG procedure. You can specify any number of BOUNDS statements as follows.

Each *bound* is composed of parameter names, constants, and inequality operators as follows:

item operator item < operator item operator item ... >

Each *item* is a constant, a parameter name, or a list of parameter names. Each *operator* is <, >, <=, or >=. Parameter names are as shown in the ESTIMATE column of the “Parameter Estimates” table or can be seen in the OUTEST= data set.

You can use both the BOUNDS statement and the RESTRICT statement to impose boundary constraints; however, the BOUNDS statement provides a simpler syntax for specifying these kinds of constraints. See also the section “[RESTRICT Statement](#)” on page 1953.

The following BOUNDS statement constrains the estimates of the parameter for *z* to be negative, the parameters for *x1* through *x10* to be between zero and one, and the parameter for *x1* in the zero-inflation model to be less than one:

```
bounds z < 0,
       0 < x1-x10 < 1,
       Inf_x1 < 1;
```

BY Statement

BY *variables* ;

A BY statement can be used with PROC TCOUNTREG to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the input data set should be sorted in the order of the BY variables.

CLASS Statement

CLASS *variables* ;

The CLASS statement names the classification variables that are used to group (classify) data in the analysis. Classification variables can be either character or numeric.

Class levels are determined from the formatted values of the CLASS *variables*. Thus, you can use formats to group values into levels. See the discussion of the FORMAT procedure in the *SAS Language Reference: Dictionary* for details. The CLASS statement must precede the MODEL statement.

FREQ Statement

FREQ *variable* ;

The FREQ statement specifies a variable whose values represent the frequency of occurrence of each observation. PROC TCOUNTREG treats each observation as if it appears n times, where n is the value of the FREQ variable for the observation. If the frequency value is not an integer, it is truncated to an integer; if it is less than 1 or missing, the observation is not used in the model fitting. When the FREQ statement is not specified, each observation is assigned a frequency of 1. If you specify more than one FREQ statement, then the first statement is used.

ID Statement

ID *variable* ;

The ID statement must be used with PROC TCOUNTREG to specify an identification variable when a panel data model is estimated. The identification variable is a cross section ID variable.

INIT Statement

INIT *initvalue1* < , *initvalue2* ... > ;

The INIT statement sets initial values for parameters in the optimization.

Each *initvalue* is written as a parameter or parameter list, followed by an optional equal sign (=), followed by a number:

parameter < => *number*

For continuous regressors, the names of the parameters are the same as the corresponding variables. For a regressor that is a CLASS variable, the parameter name combines the corresponding CLASS variable name with the variable level. For interaction and nested regressors, the parameter names combine the names of each regressor. The names of the parameters can be seen in the OUTEST= data set. By default, initial values are determined by OLS regression. Initial values can be displayed with the ITPRINT option in the PROC statement.

MODEL Statement

MODEL *dependent* = <regressors> </ options> ;

The MODEL statement specifies the dependent variable and independent covariates (regressors) for the regression model. If you specify no regressors, PROC TCOUNTREG fits a model that contains only an

intercept. The dependent count variable should take on only nonnegative integer values in the input data set. PROC TCOUNTREG rounds any positive noninteger count values to the nearest integer. PROC TCOUNTREG ignores any observations with a negative count.

Only one MODEL statement can be specified. The following options can be used in the MODEL statement after a slash (/).

DIST=*value*

specifies a type of model to be analyzed. If you specify this option in both the MODEL statement and the PROC TCOUNTREG statement, then only the value in the MODEL statement is used. The following model types are supported:

POISSON | P specifies a Poisson regression model.

NEGBIN(P=1) specifies a negative binomial regression model with a linear variance function.

NEGBIN(P=2) | NEGBIN specifies a negative binomial regression model with a quadratic variance function.

ZIPOISSON | ZIP specifies a zero-inflated Poisson regression. The ZEROMODEL statement must be specified when this model type is specified.

ZINEGBIN | ZINB specifies a zero-inflated negative binomial regression. The ZEROMODEL statement must be specified when this model type is specified.

ERRORCOMP=*value*

specifies a type of conditional panel model to be analyzed. The following model types are supported:

FIXED specifies a fixed-effect error component regression model.

RANDOM specifies a random-effect error component regression model.

NOINT

suppresses the intercept parameter.

OFFSET=*variable*

specifies a variable in the input data set to be used as an offset variable. The offset variable appears as a covariate in the model with its parameter restricted to 1. The offset variable cannot be the response variable, the zero-inflation offset variable (if any), or one of the explanatory variables. The “Model Fit Summary” table gives the name of the data set variable used as the offset variable; it is labeled as “Offset.”

SELECT=(INFO(option) | PEN(option))

specifies variable selection.

SELECT= INFO specifies that the variable selection method is based on an information criterion. For more information, see the section “[Variable Selection Using an Information Criterion](#)” on page 1967. The following *options* are available for SELECT=INFO:

DIRECTION=FORWARD | BACKWARD

specifies the searching algorithm used in the variable selection method. The default is FORWARD.

CRITER=AIC | SBC

specifies the information criterion used for the variable selection. The default is SBC.

MAXSTEPS=value

specifies the maximum number of steps allowed in the search algorithm. The default is infinite; that is, the algorithm does not stop until the stopping criterion is satisfied.

LSTOP=value

specifies the stopping criterion. *value* represents the percentage of decrease or increase in the AIC or SBC that is required for the algorithm to proceed; it must be a positive number less than 1. The default is zero.

SELECT=PEN specifies that the variable selection method is penalized likelihood. For more information, see the section [“Variable Selection Using Penalized Likelihood”](#) on page 1967. The following *options* are available for SELECT=PEN:

LLASTEPS=value

specifies the maximum number of iterations in the algorithm of local linear approximations. The default is 5.

GCVLENGTH=value

specifies the number of different values that is used for the generalized cross-validation (GCV) tuning parameter. The value corresponds to λ in the computations described in the section [“Variable Selection Using Penalized Likelihood”](#) on page 1967. The default value is 20.

GCV

specifies that the generalized cross-validation (GCV) approach be used. For more information, see the section [“The GCV Approach”](#) on page 1969.

GCV1

specifies that the GCV1 approach be used. For more information, see the section [“The GCV1 Approach”](#) on page 1970. GCV1 is the default.

Printing Options

CORRB

prints the correlation matrix of the parameter estimates. The CORRB option can also be specified in the PROC TCOUNTREG statement.

COVB

prints the covariance matrix of the parameter estimates. The COVB can also be specified in the PROC TCOUNTREG statement.

ITPRINT

prints the objective function and parameter estimates at each iteration. The objective function is the negative log-likelihood function. The ITPRINT option can also be specified in the PROC TCOUNTREG statement.

PRINTALL

requests all printing options. The PRINTALL option can also be specified in the PROC TCOUNTREG statement.

NLOPTIONS Statement

NLOPTIONS <options> ;

The NLOPTIONS statement provides the options to control the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “Nonlinear Optimization Methods.”

OUTPUT Statement

OUTPUT <OUT=SAS-data-set> <output-options> ;

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimates of $\mathbf{x}'_i\boldsymbol{\beta}$, the expected value of the response variable, and the probability of the response variable taking on the current value or other values that you specify. In a zero-inflated model, you can additionally request that the output data set contain the estimates of $\mathbf{z}'_i\boldsymbol{\gamma}$ and the probability that the response is zero as a result of the zero-generating process. Except for the probability of the current value, these statistics can be computed for all observations in which the regressors are not missing, even if the response is missing. By adding observations with missing response values to the input data set, you can compute these statistics for new observations or for settings of the regressors that are not present in the data without affecting the model fit.

You can specify only one OUTPUT statement. You can specify the following *output-options*:

OUT=SAS-data-set

names the output data set.

XBETA=name

names the variable that contains estimates of $\mathbf{x}'_i\boldsymbol{\beta}$.

PRED=name

names the variable that contains the predicted value of the response variable.

PROB=name

names the variable that contains the probability of the response variable taking the current value, $\Pr(Y = y_i)$.

PROBCOUNT(value1 <value2...>)

outputs the probability of the response variable taking particular values. Each value should be a nonnegative integer. Nonintegers are rounded to the nearest integer. *value* can also be a list of the form X TO Y BY Z. For example, PROBCOUNT(0 1 2 TO 10 BY 2 15) requests predicted probabilities

for counts 0, 1, 2, 4, 5, 6, 8, 10, and 15. This option is not available for the fixed and random effect panel models.

ZGAMMA=*name*

names the variable that contains estimates of $\mathbf{z}_i' \boldsymbol{\gamma}$.

PROBZERO=*name*

names the variable that contains the value of φ_i , the probability of the response variable taking on the value of zero as a result of the zero-generating process. It is written to the output file only if the model is zero-inflated. This is not the overall probability of a zero response; that is provided by the PROBCOUNT(0) option.

RESTRICT Statement

RESTRICT *restriction1* <, *restriction2* ... > ;

The RESTRICT statement imposes linear restrictions on the parameter estimates. You can specify any number of RESTRICT statements.

Each *restriction* is written as an expression, followed by an equality operator (=) or an inequality operator (<, >, <=, >=), followed by a second expression:

expression operator expression

The *operator* can be =, <, >, <=, or >=.

Restriction expressions can be composed of parameter names, constants, and the operators times (*), plus (+), and minus (−). The restriction expressions must be a linear function of the parameters. For continuous regressors, the names of the parameters are the same as the corresponding variables. For a regressor that is a CLASS variable, the parameter name combines the corresponding CLASS variable name with the variable level. For interaction and nested regressors, the parameter names combine the names of each regressor. The names of the parameters can be seen in the OUTEST= data set.

Lagrange multipliers are reported in the “Parameter Estimates” table for all the active linear constraints. They are identified with the names Restrict1, Restrict2, and so on. The probabilities of these Lagrange multipliers are computed using a beta distribution (LaMotte 1994). Nonactive (nonbinding) restrictions have no effect on the estimation results and are not noted in the output.

The following RESTRICT statement constrains the negative binomial dispersion parameter α to 1, which restricts the conditional variance to be $\mu + \mu^2$:

```
restrict _Alpha = 1;
```

WEIGHT Statement

WEIGHT *variable* </ *option* > ;

The WEIGHT statement specifies a variable to supply weighting values to use for each observation in estimating parameters. The log likelihood for each observation is multiplied by the corresponding weight variable value.

If the weight of an observation is nonpositive, that observation is not used in the estimation.

The following option can be added to the WEIGHT statement after a slash (/).

NONNORMALIZE

does not normalize the weights. By default, the weights are normalized so that they add up to the actual sample size. Weights w_i are normalized by multiplying them by $\frac{n}{\sum_{i=1}^n w_i}$, where n is the sample size. If the weights are required to be used as is, then specify the NONNORMALIZE option.

ZEROMODEL Statement

ZEROMODEL *dependent variable* ~ < zero-inflated regressors > < /options > ;

The ZEROMODEL statement is required if either ZIP or ZINB is specified in the DIST= option in the MODEL statement. If ZIP or ZINB is specified, then the ZEROMODEL statement must follow immediately after the MODEL statement. The dependent variable in the ZEROMODEL statement must be the same as the dependent variable in the MODEL statement.

The zero-inflated (ZI) regressors appear in the equation that determines the probability (φ_i) of a zero count. Each of these q variables has a parameter to be estimated in the regression. For example, let \mathbf{z}'_i be the i th observation's $1 \times (q + 1)$ vector of values of the q ZI explanatory variables (w_0 is set to 1 for the intercept term). Then φ_i is a function of $\mathbf{z}'_i \boldsymbol{\gamma}$, where $\boldsymbol{\gamma}$ is the $(q + 1) \times 1$ vector of parameters to be estimated. (The ZI intercept is γ_0 ; the coefficients for the q ZI covariates are $\gamma_1, \dots, \gamma_q$.) If this option is omitted, then only the intercept term γ_0 is estimated. The “Parameter Estimates” table in the displayed output gives the estimates for the ZI intercept and ZI explanatory variables; they are labeled with the prefix “Inf_”. For example, the ZI intercept is labeled “Inf_intercept”. If you specify Age (a variable in your data set) as a ZI explanatory variable, then the “Parameter Estimates” table labels the corresponding parameter estimate “Inf_Age”.

The following options can be specified in the ZEROMODEL statement following a slash (/):

LINK=value

specifies the distribution function used to compute probability of zeros. The following distribution functions are supported:

LOGISTIC	specifies the logistic distribution.
NORMAL	specifies the standard normal distribution.

If this option is omitted, then the default ZI link function is logistic.

OFFSET=variable

specifies a variable in the input data set to be used as a zero-inflated (ZI) offset variable. The ZI offset variable is included as a term, with coefficient restricted to 1, in the equation that determines the probability (φ_i) of a zero count. The ZI offset variable cannot be the response variable, the offset

variable (if any), or one of the explanatory variables. The name of the data set variable used as the ZI offset variable is displayed in the “Model Fit Summary” output, where it is labeled as “Inf_offset”.

Details: TCOUNTREG Procedure

Specification of Regressors

Each term in a model, called *regressor*, is a variable or combination of variables. Regressors are specified with a special notation that uses variable names and operators. There are two kinds of variables: *classification (CLASS) variables* and *continuous variables*. There are two primary operators: *crossing* and *nesting*. A third operator, the *bar operator*, is used to simplify effect specification.

In the SAS System, *classification (CLASS) variables* are declared in the **CLASS** statement. (They can also be called *categorical*, *qualitative*, *discrete*, or *nominal variables*.) Classification variables can be either *numeric* or *character*. The values of a classification variable are called *levels*. For example, the classification variable Sex has the levels “male” and “female.”

In a model, an independent variable that is not declared in the **CLASS** statement is assumed to be continuous. *Continuous variables*, which must be numeric, are used for covariates. For example, the heights and weights of subjects are continuous variables. A response variable is a *discrete count variable* and must also be numeric.

Types of Regressors

Seven different types of regressors are used in the TCOUNTREG procedure. In the following list, assume that A, B, C, D, and E are **CLASS** variables and that X1 and X2 are continuous variables:

- Regressors are specified by writing continuous variables by themselves: X1 X2.
- Polynomial regressors are specified by joining (crossing) two or more continuous variables with asterisks: X1*X1 X1*X2.
- Dummy regressors are specified by writing CLASS variables by themselves: A B C.
- Dummy interactions are specified by joining classification variables with asterisks: A*B B*C A*B*C.
- Nested regressors are specified by following a dummy variable or dummy interaction with a classification variable or list of classification variables enclosed in parentheses. The dummy variable or dummy interaction is nested within the regressor listed in parentheses: B(A) C(B*A) D*(E(C*B*A)). In this example, B(A) is read “B nested within A.”
- Continuous-by-class regressors are written by joining continuous variables and classification variables with asterisks: X1*A.

- Continuous-nesting-class regressors consist of continuous variables followed by a classification variable interaction enclosed in parentheses: $X1(A) \quad X1*X2(A*B)$.

One example of the general form of an effect that involves several variables is

$$X1*X2*A*B*C(D*E)$$

This example contains an interaction of continuous terms with classification terms that are nested within more than one classification variable. The continuous list comes first, followed by the dummy list, followed by the nesting list in parentheses. Note that asterisks can appear within the nested list but not immediately before the left parenthesis.

The **MODEL** statement and several other statements use these effects. Some examples of **MODEL** statements that use various kinds of effects are shown in the following table, where a, b, and c represent classification variables. Variables x and z are continuous.

Specification	Type of Model
<code>model y=x;</code>	Simple regression
<code>model y=x z;</code>	Multiple regression
<code>model y=x x*x;</code>	Polynomial regression
<code>model y=a;</code>	Regression with one classification variable
<code>model y=a b c;</code>	Regression with multiple classification variables
<code>model y=a b a*b;</code>	Regression with classification variables and their interactions
<code>model y=a b(a) c(b a);</code>	Regression with classification variables and their interactions
<code>model y=a x;</code>	Regression with both countibuous and classification variables
<code>model y=a x(a);</code>	Separate-slopes regression
<code>model y=a x x*a;</code>	Homogeneity-of-slopes regression

The Bar Operator

You can shorten the specification of a large factorial model by using the bar operator. For example, two ways of writing the model for a full three-way factorial model follow:

```
model Y = A B C    A*B A*C B*C    A*B*C;
```

```
model Y = A|B|C;
```

When the bar (|) is used, the right and left sides become effects, and the cross of them becomes an effect. Multiple bars are permitted. The expressions are expanded from left to right, using rules 2–4 given in Searle (1971, p. 390).

- Multiple bars are evaluated from left to right. For instance, A|B|C is evaluated as follows:

$$\begin{aligned}
 A|B|C &\rightarrow \{A|B\}|C \\
 &\rightarrow \{A\ B\ A*B\}|C \\
 &\rightarrow A\ B\ A*B\ C\ A*C\ B*C\ A*B*C
 \end{aligned}$$

- Crossed and nested groups of variables are combined. For example, $A(B)|C(D)$ generates $A*C(B\ D)$, among other terms.
- Duplicate variables are removed. For example, $A(C)|B(C)$ generates $A*B(C\ C)$, among other terms, and the extra C is removed.
- Effects are discarded if a variable occurs on both the crossed and nested parts of an effect. For instance, $A(B)|B(D\ E)$ generates $A*B(B\ D\ E)$, but this effect is eliminated immediately.

You can also specify the maximum number of variables involved in any effect that results from bar evaluation by specifying that maximum number, preceded by an @ sign, at the end of the bar effect. For example, the specification $A|B|C@2$ would result in only those effects that contain two or fewer variables: in this case, $A\ B\ A*B\ C\ A*C$ and $B*C$.

More examples of using the | and @ operators follow:

$A C(B)$	is equivalent to	$A\ C(B)\ A*C(B)$
$A(B) C(B)$	is equivalent to	$A(B)\ C(B)\ A*C(B)$
$A(B) B(D\ E)$	is equivalent to	$A(B)\ B(D\ E)$
$A B(A) C$	is equivalent to	$A\ B(A)\ C\ A*C\ B*C(A)$
$A B(A) C@2$	is equivalent to	$A\ B(A)\ C\ A*C$
$A B C D@2$	is equivalent to	$A\ B\ A*B\ C\ A*C\ B*C\ D\ A*D\ B*D\ C*D$
$A*B(C*D)$	is equivalent to	$A*B(C\ D)$

Missing Values

Any observation in the input data set with a missing value for one or more of the regressors is ignored by PROC TCOUNTREG and not used in the model fit. PROC TCOUNTREG rounds any positive noninteger count values to the nearest integer. PROC TCOUNTREG ignores any observations with a negative count, a zero or negative weight, or a frequency less than 1.

If there are observations in the input data set with missing response values but with nonmissing regressors, PROC TCOUNTREG can compute several statistics and store them in an output data set by using the OUTPUT statement. For example, you can request that the output data set contain the estimates of $\mathbf{x}'_i\boldsymbol{\beta}$, the expected value of the response variable, and the probability of the response variable taking on values that you specify. In a zero-inflated model, you can additionally request that the output data set contain the estimates of $\mathbf{z}'_i\boldsymbol{\gamma}$, and the probability that the response is zero as a result of the zero-generating process. The presence of such observations (with missing response values) does not affect the model fit.

Poisson Regression

The most widely used model for count data analysis is Poisson regression. This assumes that y_i , given the vector of covariates \mathbf{x}_i , is independently Poisson-distributed with

$$P(Y_i = y_i | \mathbf{x}_i) = \frac{e^{-\mu_i} \mu_i^{y_i}}{y_i!}, \quad y_i = 0, 1, 2, \dots$$

and the mean parameter (that is, the mean number of events per period) is given by

$$\mu_i = \exp(\mathbf{x}_i' \boldsymbol{\beta})$$

where $\boldsymbol{\beta}$ is a $(k + 1) \times 1$ parameter vector. (The intercept is β_0 ; the coefficients for the k regressors are β_1, \dots, β_k .) Taking the exponential of $\mathbf{x}_i' \boldsymbol{\beta}$ ensures that the mean parameter μ_i is nonnegative. It can be shown that the conditional mean is given by

$$E(y_i | \mathbf{x}_i) = \mu_i = \exp(\mathbf{x}_i' \boldsymbol{\beta})$$

The name *log-linear model* is also used for the Poisson regression model since the logarithm of the conditional mean is linear in the parameters:

$$\ln[E(y_i | \mathbf{x}_i)] = \ln(\mu_i) = \mathbf{x}_i' \boldsymbol{\beta}$$

Note that the conditional variance of the count random variable is equal to the conditional mean in the Poisson regression model:

$$V(y_i | \mathbf{x}_i) = E(y_i | \mathbf{x}_i) = \mu_i$$

The equality of the conditional mean and variance of y_i is known as *equidispersion*.

The marginal effect of a regressor is given by

$$\frac{\partial E(y_i | \mathbf{x}_i)}{\partial x_{ji}} = \exp(\mathbf{x}_i' \boldsymbol{\beta}) \beta_j = E(y_i | \mathbf{x}_i) \beta_j$$

Thus, a one-unit change in the j th regressor leads to a *proportional* change in the conditional mean $E(y_i | \mathbf{x}_i)$ of β_j .

The standard estimator for the Poisson model is the maximum likelihood estimator (MLE). Since the observations are independent, the log-likelihood function is written as

$$\mathcal{L} = \sum_{i=1}^N w_i (-\mu_i + y_i \ln \mu_i - \ln y_i!) = \sum_{i=1}^N w_i (-e^{\mathbf{x}_i' \boldsymbol{\beta}} + y_i \mathbf{x}_i' \boldsymbol{\beta} - \ln y_i!)$$

where w_i is defined as follows:

- | | |
|-------|---|
| 1 | if neither the WEIGHT nor the FREQ statement is used. |
| W_i | where W_i are the nonnormalized values of the variable specified in the WEIGHT statement in which the NONNORMALIZE option is specified. |

$\frac{\sum_{i=1}^n W_i}{\sum_{i=1}^n F_i W_i}$	where W_i are the nonnormalized values of the variable specified in the WEIGHT statement.
F_i	where F_i are the values of the variable specified in the FREQ statement.
$W_i F_i$	if both the WEIGHT statement, without the NONNORMALIZE option, and the FREQ statement are specified.
$\frac{\sum_{i=1}^n F_i}{\sum_{i=1}^n F_i W_i} W_i F_i$	if both the FREQ and the WEIGHT statements are specified.

The gradient and the Hessian are, respectively,

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i (y_i - \mu_i) \mathbf{x}_i = \sum_{i=1}^N w_i (y_i - e^{\mathbf{x}_i' \boldsymbol{\beta}}) \mathbf{x}_i$$

$$\frac{\partial^2 \mathcal{L}}{\partial \boldsymbol{\beta} \partial \boldsymbol{\beta}'} = - \sum_{i=1}^N w_i \mu_i \mathbf{x}_i \mathbf{x}_i' = - \sum_{i=1}^N w_i e^{\mathbf{x}_i' \boldsymbol{\beta}} \mathbf{x}_i \mathbf{x}_i'$$

The Poisson model has been criticized for its restrictive property that the conditional variance equals the conditional mean. Real-life data are often characterized by *overdispersion* (that is, the variance exceeds the mean). Allowing for overdispersion can improve model predictions since the Poisson restriction of equal mean and variance results in the underprediction of zeros when overdispersion exists. The most commonly used model that accounts for overdispersion is the negative binomial model.

Negative Binomial Regression

The Poisson regression model can be generalized by introducing an unobserved heterogeneity term for observation i . Thus, the individuals are assumed to differ randomly in a manner that is not fully accounted for by the observed covariates. This is formulated as

$$E(y_i | \mathbf{x}_i, \tau_i) = \mu_i \tau_i = e^{\mathbf{x}_i' \boldsymbol{\beta} + \epsilon_i}$$

where the unobserved heterogeneity term $\tau_i = e^{\epsilon_i}$ is independent of the vector of regressors \mathbf{x}_i . Then the distribution of y_i conditional on \mathbf{x}_i and τ_i is Poisson with conditional mean and conditional variance $\mu_i \tau_i$:

$$f(y_i | \mathbf{x}_i, \tau_i) = \frac{\exp(-\mu_i \tau_i) (\mu_i \tau_i)^{y_i}}{y_i!}$$

Let $g(\tau_i)$ be the probability density function of τ_i . Then, the distribution $f(y_i | \mathbf{x}_i)$ (no longer conditional on τ_i) is obtained by integrating $f(y_i | \mathbf{x}_i, \tau_i)$ with respect to τ_i :

$$f(y_i | \mathbf{x}_i) = \int_0^\infty f(y_i | \mathbf{x}_i, \tau_i) g(\tau_i) d\tau_i$$

An analytical solution to this integral exists when τ_i is assumed to follow a gamma distribution. This solution is the negative binomial distribution. When the model contains a constant term, it is necessary to

assume that $E(e^{\epsilon_i}) = E(\tau_i) = 1$, in order to identify the mean of the distribution. Thus, it is assumed that τ_i follows a $\text{gamma}(\theta, \theta)$ distribution with $E(\tau_i) = 1$ and $V(\tau_i) = 1/\theta$,

$$g(\tau_i) = \frac{\theta^\theta}{\Gamma(\theta)} \tau_i^{\theta-1} \exp(-\theta \tau_i)$$

where $\Gamma(x) = \int_0^\infty z^{x-1} \exp(-z) dz$ is the gamma function and θ is a positive parameter. Then, the density of y_i given \mathbf{x}_i is derived as

$$\begin{aligned} f(y_i|\mathbf{x}_i) &= \int_0^\infty f(y_i|\mathbf{x}_i, \tau_i) g(\tau_i) d\tau_i \\ &= \frac{\theta^\theta \mu_i^{y_i}}{y_i! \Gamma(\theta)} \int_0^\infty e^{-(\mu_i + \theta)\tau_i} \tau_i^{\theta+y_i-1} d\tau_i \\ &= \frac{\theta^\theta \mu_i^{y_i} \Gamma(y_i + \theta)}{y_i! \Gamma(\theta) (\theta + \mu_i)^{\theta+y_i}} \\ &= \frac{\Gamma(y_i + \theta)}{y_i! \Gamma(\theta)} \left(\frac{\theta}{\theta + \mu_i} \right)^\theta \left(\frac{\mu_i}{\theta + \mu_i} \right)^{y_i} \end{aligned}$$

Making the substitution $\alpha = \frac{1}{\theta}$ ($\alpha > 0$), the negative binomial distribution can then be rewritten as

$$f(y_i|\mathbf{x}_i) = \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}, \quad y_i = 0, 1, 2, \dots$$

Thus, the negative binomial distribution is derived as a gamma mixture of Poisson random variables. It has conditional mean

$$E(y_i|\mathbf{x}_i) = \mu_i = e^{\mathbf{x}_i' \boldsymbol{\beta}}$$

and conditional variance

$$V(y_i|\mathbf{x}_i) = \mu_i \left[1 + \frac{1}{\theta} \mu_i \right] = \mu_i [1 + \alpha \mu_i] > E(y_i|\mathbf{x}_i)$$

The conditional variance of the negative binomial distribution exceeds the conditional mean. Overdispersion results from neglected unobserved heterogeneity. The negative binomial model with variance function $V(y_i|\mathbf{x}_i) = \mu_i + \alpha \mu_i^2$, which is quadratic in the mean, is referred to as the NEGBIN2 model (Cameron and Trivedi 1986). To estimate this model, specify `DIST=NEGBIN(p=2)` in the `MODEL` statement. The Poisson distribution is a special case of the negative binomial distribution where $\alpha = 0$. A test of the Poisson distribution can be carried out by testing the hypothesis that $\alpha = \frac{1}{\theta_i} = 0$. A Wald test of this hypothesis is provided (it is the reported t statistic for the estimated α in the negative binomial model).

The log-likelihood function of the negative binomial regression model (NEGBIN2) is given by

$$\begin{aligned} \mathcal{L} &= \sum_{i=1}^N w_i \left\{ \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1}) - \ln(y_i!) \right. \\ &\quad \left. - (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})) + y_i \ln(\alpha) + y_i \mathbf{x}_i' \boldsymbol{\beta} \right\} \end{aligned}$$

$$\Gamma(y+a)/\Gamma(a) = \prod_{j=0}^{y-1} (j+a)$$

if y is an integer. See “[Poisson Regression](#)” on page 1958 for the definition of w_i .

The gradient is

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i \frac{y_i - \mu_i}{1 + \alpha \mu_i} \mathbf{x}_i$$

and

$$\frac{\partial \mathcal{L}}{\partial \alpha} = \sum_{i=1}^N w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \mu_i) + \frac{y_i - \mu_i}{\alpha(1 + \alpha \mu_i)} \right\}$$

Cameron and Trivedi (1986) consider a general class of negative binomial models with mean μ_i and variance function $\mu_i + \alpha \mu_i^p$. The NEGBIN2 model, with $p = 2$, is the standard formulation of the negative binomial model. Models with other values of p , $-\infty < p < \infty$, have the same density $f(y_i | \mathbf{x}_i)$ except that α^{-1} is replaced everywhere by $\alpha^{-1} \mu_i^{2-p}$. The negative binomial model NEGBIN1, which sets $p = 1$, has variance function $V(y_i | \mathbf{x}_i) = \mu_i + \alpha \mu_i$, which is linear in the mean. To estimate this model, specify `DIST=NEGBIN(p=1)` in the `MODEL` statement.

The log-likelihood function of the NEGBIN1 regression model is given by

$$\begin{aligned} \mathcal{L} = & \sum_{i=1}^N w_i \left\{ \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1} \exp(\mathbf{x}_i' \boldsymbol{\beta})) \right. \\ & \left. - \ln(y_i!) - (y_i + \alpha^{-1} \exp(\mathbf{x}_i' \boldsymbol{\beta})) \ln(1 + \alpha) + y_i \ln(\alpha) \right\} \end{aligned}$$

See the section “[Poisson Regression](#)” on page 1958 for the definition of w_i .

The gradient is

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{i=1}^N w_i \left\{ \left(\sum_{j=0}^{y_i-1} \frac{\mu_i}{(j\alpha + \mu_i)} \right) \mathbf{x}_i - \alpha^{-1} \ln(1 + \alpha) \mu_i \mathbf{x}_i \right\}$$

and

$$\frac{\partial \mathcal{L}}{\partial \alpha} = \sum_{i=1}^N w_i \left\{ - \left(\sum_{j=0}^{y_i-1} \frac{\alpha^{-1} \mu_i}{(j\alpha + \mu_i)} \right) - \alpha^{-2} \mu_i \ln(1 + \alpha) - \frac{(y_i + \alpha^{-1} \mu_i)}{1 + \alpha} + \frac{y_i}{\alpha} \right\}$$

Zero-Inflated Count Regression Overview

The main motivation for zero-inflated count models is that real-life data frequently display overdispersion and excess zeros. Zero-inflated count models provide a way of modeling the excess zeros in addition to

allowing for overdispersion. In particular, for each observation, there are two possible data generation processes. The result of a Bernoulli trial is used to determine which of the two processes is used. For observation i , Process 1 is chosen with probability φ_i and Process 2 with probability $1 - \varphi_i$. Process 1 generates only zero counts. Process 2 generates counts from either a Poisson or a negative binomial model. In general,

$$y_i \sim \begin{cases} 0 & \text{with probability } \varphi_i \\ g(y_i) & \text{with probability } 1 - \varphi_i \end{cases}$$

Therefore, the probability of $\{Y_i = y_i\}$ can be described as

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i) &= \varphi_i + (1 - \varphi_i)g(0) \\ P(y_i | \mathbf{x}_i) &= (1 - \varphi_i)g(y_i), \quad y_i > 0 \end{aligned}$$

where $g(y_i)$ follows either the Poisson or the negative binomial distribution. You can specify the probability φ with the PROBZERO= option in the OUTPUT statement.

When the probability φ_i depends on the characteristics of observation i , φ_i is written as a function of $\mathbf{z}'_i \boldsymbol{\gamma}$, where \mathbf{z}'_i is the $1 \times (q + 1)$ vector of zero-inflation covariates and $\boldsymbol{\gamma}$ is the $(q + 1) \times 1$ vector of zero-inflation coefficients to be estimated. (The zero-inflation intercept is γ_0 ; the coefficients for the q zero-inflation covariates are $\gamma_1, \dots, \gamma_q$.) The function F that relates the product $\mathbf{z}'_i \boldsymbol{\gamma}$ (which is a scalar) to the probability φ_i is called the zero-inflation link function,

$$\varphi_i = F_i = F(\mathbf{z}'_i \boldsymbol{\gamma})$$

In the TCOUNTREG procedure, the zero-inflation covariates are indicated in the ZEROMODEL statement. Furthermore, the zero-inflation link function F can be specified as either the logistic function,

$$F(\mathbf{z}'_i \boldsymbol{\gamma}) = \Lambda(\mathbf{z}'_i \boldsymbol{\gamma}) = \frac{\exp(\mathbf{z}'_i \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}'_i \boldsymbol{\gamma})}$$

or the standard normal cumulative distribution function (also called the probit function),

$$F(\mathbf{z}'_i \boldsymbol{\gamma}) = \Phi(\mathbf{z}'_i \boldsymbol{\gamma}) = \int_0^{\mathbf{z}'_i \boldsymbol{\gamma}} \frac{1}{\sqrt{2\pi}} \exp(-u^2/2) du$$

The zero-inflation link function is indicated in the LINK option in ZEROMODEL statement. The default ZI link function is the logistic function.

Zero-Inflated Poisson Regression

In the zero-inflated Poisson (ZIP) regression model, the data generation process referred to earlier as Process 2 is

$$g(y_i) = \frac{\exp(-\mu_i) \mu_i^{y_i}}{y_i!}$$

where $\mu_i = e^{\mathbf{x}_i' \boldsymbol{\beta}}$. Thus the ZIP model is defined as

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i, \mathbf{z}_i) &= F_i + (1 - F_i) \exp(-\mu_i) \\ P(y_i | \mathbf{x}_i, \mathbf{z}_i) &= (1 - F_i) \frac{\exp(-\mu_i) \mu_i^{y_i}}{y_i!}, \quad y_i > 0 \end{aligned}$$

The conditional expectation and conditional variance of y_i are given by

$$\begin{aligned} E(y_i | \mathbf{x}_i, \mathbf{z}_i) &= \mu_i (1 - F_i) \\ V(y_i | \mathbf{x}_i, \mathbf{z}_i) &= E(y_i | \mathbf{x}_i, \mathbf{z}_i) (1 + \mu_i F_i) \end{aligned}$$

Note that the ZIP model (as well as the ZINB model) exhibits overdispersion since $V(y_i | \mathbf{x}_i, \mathbf{z}_i) > E(y_i | \mathbf{x}_i, \mathbf{z}_i)$.

In general, the log-likelihood function of the ZIP model is

$$\mathcal{L} = \sum_{i=1}^N w_i \ln [P(y_i | \mathbf{x}_i, \mathbf{z}_i)]$$

After a specific link function (either logistic or standard normal) for the probability φ_i is chosen, it is possible to write the exact expressions for the log-likelihood function and the gradient.

ZIP Model with Logistic Link Function

First, consider the ZIP model in which the probability φ_i is expressed with a logistic link function—namely,

$$\varphi_i = \frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})}$$

The log-likelihood function is

$$\begin{aligned} \mathcal{L} &= \sum_{\{i: y_i=0\}} w_i \ln [\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))] \\ &\quad + \sum_{\{i: y_i>0\}} w_i \left[y_i \mathbf{x}_i' \boldsymbol{\beta} - \exp(\mathbf{x}_i' \boldsymbol{\beta}) - \sum_{k=2}^{y_i} \ln(k) \right] \\ &\quad - \sum_{i=1}^N w_i \ln [1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})] \end{aligned}$$

See the section “[Poisson Regression](#)” on page 1958 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} &= \sum_{\{i: y_i=0\}} w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \right] \mathbf{z}_i - \sum_{i=1}^N w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})} \right] \mathbf{z}_i \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{\{i: y_i=0\}} w_i \left[\frac{-\exp(\mathbf{x}_i' \boldsymbol{\beta}) \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \right] \mathbf{x}_i + \sum_{\{i: y_i>0\}} w_i [y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})] \mathbf{x}_i \end{aligned}$$

ZIP Model with Standard Normal Link Function

Next, consider the ZIP model in which the probability φ_i is expressed with a standard normal link function: $\varphi_i = \Phi(\mathbf{z}_i' \boldsymbol{\gamma})$. The log-likelihood function is

$$\begin{aligned} \mathcal{L} &= \sum_{\{i: y_i=0\}} w_i \ln \{ \Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta})) \} \\ &+ \sum_{\{i: y_i>0\}} w_i \left\{ \ln [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] - \exp(\mathbf{x}_i' \boldsymbol{\beta}) + y_i \mathbf{x}_i' \boldsymbol{\beta} - \sum_{k=2}^{y_i} \ln(k) \right\} \end{aligned}$$

See the section “[Poisson Regression](#)” on page 1958 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} &= \sum_{\{i: y_i=0\}} w_i \frac{\varphi(\mathbf{z}_i' \boldsymbol{\gamma}) [1 - \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))]}{\Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \mathbf{z}_i \\ &- \sum_{\{i: y_i>0\}} w_i \frac{\varphi(\mathbf{z}_i' \boldsymbol{\gamma})}{[1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})]} \mathbf{z}_i \end{aligned}$$

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{\{i: y_i=0\}} w_i \frac{-[1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(\mathbf{x}_i' \boldsymbol{\beta}) \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))}{\Phi(\mathbf{z}_i' \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}_i' \boldsymbol{\gamma})] \exp(-\exp(\mathbf{x}_i' \boldsymbol{\beta}))} \mathbf{x}_i \\ &+ \sum_{\{i: y_i>0\}} w_i [y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})] \mathbf{x}_i \end{aligned}$$

Zero-Inflated Negative Binomial Regression

The zero-inflated negative binomial (ZINB) model in PROC TCOUNTREG is based on the negative binomial model with quadratic variance function ($p=2$). The ZINB model is obtained by specifying a negative binomial distribution for the data generation process referred to earlier as Process 2:

$$g(y_i) = \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}$$

Thus the ZINB model is defined to be

$$\begin{aligned} P(y_i = 0 | \mathbf{x}_i, \mathbf{z}_i) &= F_i + (1 - F_i) (1 + \alpha \mu_i)^{-\alpha^{-1}} \\ P(y_i | \mathbf{x}_i, \mathbf{z}_i) &= (1 - F_i) \frac{\Gamma(y_i + \alpha^{-1})}{y_i! \Gamma(\alpha^{-1})} \left(\frac{\alpha^{-1}}{\alpha^{-1} + \mu_i} \right)^{\alpha^{-1}} \\ &\times \left(\frac{\mu_i}{\alpha^{-1} + \mu_i} \right)^{y_i}, \quad y_i > 0 \end{aligned}$$

In this case, the conditional expectation and conditional variance of y_i are

$$E(y_i | \mathbf{x}_i, \mathbf{z}_i) = \mu_i (1 - F_i)$$

$$V(y_i | \mathbf{x}_i, \mathbf{z}_i) = E(y_i | \mathbf{x}_i, \mathbf{z}_i) [1 + \mu_i (F_i + \alpha)]$$

As with the ZIP model, the ZINB model exhibits overdispersion because the conditional variance exceeds the conditional mean.

ZINB Model with Logistic Link Function

In this model, the probability φ_i is given by the logistic function—namely,

$$\varphi_i = \frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})}$$

The log-likelihood function is

$$\begin{aligned} \mathcal{L} = & \sum_{\{i: y_i=0\}} w_i \ln \left[\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}} \right] \\ & + \sum_{\{i: y_i>0\}} w_i \sum_{j=0}^{y_i-1} \ln(j + \alpha^{-1}) \\ & + \sum_{\{i: y_i>0\}} w_i \{ -\ln(y_i!) - (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})) + y_i \ln(\alpha) + y_i \mathbf{x}_i' \boldsymbol{\beta} \} \\ & - \sum_{i=1}^N w_i \ln [1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})] \end{aligned}$$

See the section “[Poisson Regression](#)” on page 1958 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} = & \sum_{\{i: y_i=0\}} w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{z}_i \\ & - \sum_{i=1}^N w_i \left[\frac{\exp(\mathbf{z}_i' \boldsymbol{\gamma})}{1 + \exp(\mathbf{z}_i' \boldsymbol{\gamma})} \right] \mathbf{z}_i \\ \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = & \sum_{\{i: y_i=0\}} w_i \left[\frac{-\exp(\mathbf{x}_i' \boldsymbol{\beta})(1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}-1}}{\exp(\mathbf{z}_i' \boldsymbol{\gamma}) + (1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{x}_i \\ & + \sum_{\{i: y_i>0\}} w_i \left[\frac{y_i - \exp(\mathbf{x}_i' \boldsymbol{\beta})}{1 + \alpha \exp(\mathbf{x}_i' \boldsymbol{\beta})} \right] \mathbf{x}_i \end{aligned}$$

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \alpha} = & \sum_{\{i:y_i=0\}} w_i \frac{\alpha^{-2} [(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) - \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})]}{\exp(\mathbf{z}'_i \boldsymbol{\gamma}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{(1+\alpha)/\alpha} + (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \\ & + \sum_{\{i:y_i>0\}} w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) + \frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{\alpha(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \right\} \end{aligned}$$

ZINB Model with Standard Normal Link Function

For this model, the probability φ_i is specified with the standard normal distribution function (probit function): $\varphi_i = \Phi(\mathbf{z}'_i \boldsymbol{\gamma})$. The log-likelihood function is

$$\begin{aligned} \mathcal{L} = & \sum_{\{i:y_i=0\}} w_i \ln \left\{ \Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}} \right\} \\ & + \sum_{\{i:y_i>0\}} w_i \ln [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \\ & + \sum_{\{i:y_i>0\}} w_i \sum_{j=0}^{y_i-1} \{\ln(j + \alpha^{-1})\} \\ & - \sum_{\{i:y_i>0\}} w_i \ln(y_i!) \\ & - \sum_{\{i:y_i>0\}} w_i (y_i + \alpha^{-1}) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \\ & + \sum_{\{i:y_i>0\}} w_i y_i \ln(\alpha) \\ & + \sum_{\{i:y_i>0\}} w_i y_i \mathbf{x}'_i \boldsymbol{\beta} \end{aligned}$$

See the section “Poisson Regression” on page 1958 for the definition of w_i .

The gradient for this model is given by

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \boldsymbol{\gamma}} = & \sum_{\{i:y_i=0\}} w_i \left[\frac{\varphi(\mathbf{z}'_i \boldsymbol{\gamma}) [1 - (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}]}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}} \right] \mathbf{z}_i \\ & - \sum_{\{i:y_i>0\}} w_i \left[\frac{\varphi(\mathbf{z}'_i \boldsymbol{\gamma})}{1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})} \right] \mathbf{z}_i \end{aligned}$$

$$\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} = \sum_{\{i:y_i=0\}} w_i \frac{-[1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \exp(\mathbf{x}'_i \boldsymbol{\beta}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-(1+\alpha)/\alpha}}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{-\alpha^{-1}}} \mathbf{x}_i$$

$$\begin{aligned}
& + \sum_{\{i: y_i > 0\}} w_i \left[\frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})} \right] \mathbf{x}_i \\
\\
\frac{\partial \mathcal{L}}{\partial \alpha} &= \sum_{\{i: y_i = 0\}} w_i \frac{[1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] \alpha^{-2} [(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) - \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})]}{\Phi(\mathbf{z}'_i \boldsymbol{\gamma}) (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))^{(1+\alpha)/\alpha} + [1 - \Phi(\mathbf{z}'_i \boldsymbol{\gamma})] (1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \\
& + \sum_{\{i: y_i > 0\}} w_i \left\{ -\alpha^{-2} \sum_{j=0}^{y_i-1} \frac{1}{(j + \alpha^{-1})} + \alpha^{-2} \ln(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta})) + \frac{y_i - \exp(\mathbf{x}'_i \boldsymbol{\beta})}{\alpha(1 + \alpha \exp(\mathbf{x}'_i \boldsymbol{\beta}))} \right\}
\end{aligned}$$

Variable Selection

Variable Selection Using an Information Criterion

This type of variable selection uses either Akaike's information criterion (AIC) or the Schwartz Bayesian criterion (SBC) and either a forward selection method or a backward elimination method.

Forward selection starts from a small subset of variables. In each step, the variable that gives the largest decrease in the value of the information criterion specified in the CRITER= option (AIC or SBC) is added. The process stops when the next candidate to be added does not reduce the value of the information criterion by more than the amount specified in the LSTOP= option in the MODEL statement.

Backward elimination starts from a larger subset of variables. In each step, one variable is dropped based on the information criterion chosen.

Variable Selection Using Penalized Likelihood

Variable selection in the linear regression context can be achieved by adding some form of penalty on the regression coefficients. One particular such form is L_1 norm penalty, which leads to LASSO:

$$\min_{\boldsymbol{\beta}} \|Y - X\boldsymbol{\beta}\|^2 + \lambda \sum_{j=1}^p |\beta_j|$$

This penalty method is becoming more popular in linear regression, because of the computational development in the recent years. However, how to generalize the penalty method for variable selection to the more general statistical models is not trivial. Some work has been done for the generalized linear models, in the sense that the likelihood depends on the data through a linear combination of the parameters and the data:

$$l(\boldsymbol{\beta}|x) = l(x^T \boldsymbol{\beta})$$

In the more general form, the likelihood as a function of the parameters can be denoted by $l(\theta) = \sum_i l_i(\theta)$, where θ is a vector that can include any parameters and $l(\cdot)$ is the likelihood for each observation. For example, in the Poisson model, $\theta = (\beta_0, \beta_1, \dots, \beta_p)$, and in the negative binomial model $\theta = (\beta_0, \beta_1, \dots, \beta_p, \alpha)$. The following discussion introduces the penalty method using the Poisson model as an example, but it applies similarly to the negative binomial model. The penalized likelihood function takes the form

$$Q(\beta) = \sum_i l_i(\beta) - n \sum_{j=1}^p p_{\lambda_j}(|\beta_j|) \quad (30.1)$$

Some desired properties for the penalty functions are *unbiasedness*, *sparsity*, and *continuity*. Unbiasedness means that the coefficients should be unbiased for significant variables. Sparsity means that the coefficients can be exactly zero when the penalty is large enough. Continuity means that the solution of the penalized problem is continuous in the data, which means that a small perturbation of the data does not change the estimation significantly.

The L_1 norm penalty function used in the calculation is specified as:

$$p_{\lambda}(|\beta|) = \lambda$$

The main challenge for this penalized likelihood method is on the computation side. The penalty function is nondifferentiable at zero, which poses a computational problem for the optimization. To get around this nondifferentiability problem, Fan and Li (2001) suggest a local quadratic approximation for the penalty function. However, it is later found that the numerical performance is not satisfactory in a few aspects. Zou and Li (2008) proposed local linear approximation (LLA) to solve the problem (30.1) numerically. The algorithm replaces the penalty function with a linear approximation around a fixed point $\beta^{(0)}$:

$$p_{\lambda}(|\beta_j|) \approx p_{\lambda}(|\beta_j^{(0)}|) + p'_{\lambda}(|\beta_j^{(0)}|) (|\beta_j| - |\beta_j^{(0)}|)$$

Then the problem can be solved iteratively. Start from $\beta^{(0)} = \hat{\beta}_M$, which denotes the usual MLE estimate. For iteration k ,

$$\beta^{(k+1)} = \arg \max_{\beta} \left\{ \sum_i l_i(\beta) - n \sum_{j=1}^p p'_{\lambda}(|\beta_j^{(k)}|) |\beta_j| \right\}$$

The algorithm stops when $\|\beta^{(k+1)} - \beta^{(k)}\|$ is small. To save computing time, you can also choose a maximum number of iterations. This number can be specified by the LLASTEPS= option.

The objective function is nondifferentiable. The optimization problem can be solved using an optimization methods with constraints, by a variable transformation

$$\beta_j = \beta_j^+ - \beta_j^-, \beta_j^+ \geq 0, \beta_j^- \geq 0 \quad (30.2)$$

For each fixed tuning parameter λ , you can solve the preceding optimization problem to obtain an estimate for β . Due to the property of the L_1 norm penalty, some of the coefficients in β can be exactly zero. The remaining question is to choose the best tuning parameter λ . You can use either of the approaches described in the following subsections.

The GCV Approach

In this approach, the generalized cross-validation criteria (GCV) is computed for each value of λ on a predetermined grid $\{\lambda_1, \dots, \lambda_L\}$; the value of λ that achieves the minimum of the GCV is the optimal tuning parameter. The maximum value λ_L can be determined by lemma 1 in Park and Hastie (2007) as follows. Suppose β_0 is free of penalty in the objective function. Let $\hat{\beta}_0$ be the MLE of β_0 by forcing the rest of the parameters to be zero. Then the maximum value of λ is

$$\begin{aligned}\lambda_L &= \arg \max_{\lambda} \left\{ \max_{\lambda} : \left| \frac{\partial l}{\partial \beta_j}(\hat{\beta}_0) \right| \leq n P'_{\lambda}(|\beta_j|), j = 1, \dots, p \right\} \\ &= \arg \max_{\lambda} \left\{ \left| \frac{1}{n} \frac{\partial l}{\partial \beta_j}(\hat{\beta}_0) \right|, j = 1, \dots, p \right\}\end{aligned}$$

You can compute the GCV by using the LASSO framework. In the last step of Newton-Raphson approximation, you have

$$\frac{1}{2} \min_{\beta} \left\| (\nabla^2 l(\beta^{(k)}))^{1/2} (\beta - \beta^{(k)}) + (\nabla^2 l(\beta^{(k)}))^{-1/2} \nabla l(\beta^{(k)}) \right\|^2 + n \sum_{j=1}^p p'_{\lambda}(|\beta_j^{(k)}|) |\beta_j|$$

The solution $\hat{\beta}$ satisfies

$$\hat{\beta} - \beta^{(k)} = -(\nabla^2 l(\beta^{(k)}) - 2W^-)^{-1} (\nabla l(\beta^{(k)}) - 2\mathbf{b})$$

where

$$\begin{aligned}W^- &= n \text{diag}(W_1^-, \dots, W_p^-) \\ W_j^- &= \begin{cases} \frac{p'_{\lambda}(|\beta_j^{(k)}|)}{|\beta_j|}, & \text{if } \beta_j \neq 0 \\ 0, & \text{if } \beta_j = 0 \end{cases} \\ \mathbf{b} &= n \text{diag}(p'_{\lambda}(|\beta_1^{(k)}|) \text{sgn}(\beta_1), \dots, p'_{\lambda}(|\beta_p^{(k)}|) \text{sgn}(\beta_p))\end{aligned}$$

Note that the intercept term has no penalty on its absolute value, and therefore the W_j^- term that corresponds to the intercept is 0. More generally, you can make any parameter (such as the α in the negative binomial model) in the likelihood function free of penalty, and you treat them the same as the intercept.

The effective number of parameters is

$$\begin{aligned}e(\lambda) &= \text{tr} \left\{ \left(\nabla^2 l(\beta^{(k)}) \right)^{1/2} \left(\nabla^2 l(\beta^{(k)}) - 2W^- \right)^{-1} \left(\nabla^2 l(\beta^{(k)}) \right)^{1/2} \right\} \\ &= \text{tr} \left\{ \left(\nabla^2 l(\beta^{(k)}) - 2W^- \right)^{-1} \nabla^2 l(\beta^{(k)}) \right\}\end{aligned}$$

and the generalized cross-validation error is

$$\text{GCV}(\lambda) = \frac{l(\hat{\beta})}{n[1 - e(\lambda)/n]^2}$$

The GCV1 Approach

Another form of GCV uses the number of nonzero coefficients as the degrees-of-freedom:

$$e_1(\lambda) = \sum_{j=0}^p \mathbf{1}_{[\beta_j \neq 0]}$$

$$\text{GCV}_1(\lambda) = \frac{l(\hat{\beta})}{n[1 - e_1(\lambda)/n]^2}$$

The standard errors follow the sandwich formula

$$\begin{aligned} \text{cov}(\hat{\beta}) &= \left\{ \nabla^2 l(\beta^{(k)}) - 2W^- \right\}^{-1} \widehat{\text{cov}} \left(\nabla l(\beta^{(k)}) - 2\mathbf{b} \right) \left\{ \nabla^2 l(\beta^{(k)}) - 2W^- \right\}^{-1} \\ &= \left\{ \nabla^2 l(\beta^{(k)}) - 2W^- \right\}^{-1} \widehat{\text{cov}} \left(\nabla l(\beta^{(k)}) \right) \left\{ \nabla^2 l(\beta^{(k)}) - 2W^- \right\}^{-1} \end{aligned}$$

It is common practice to report only the standard errors of the nonzero parameters.

Panel Data Analysis

Panel Data Poisson Regression with Fixed Effects

The count regression model for panel data can be derived from the Poisson regression model. Consider the multiplicative one-way panel data model,

$$y_{it} \sim \text{Poisson}(\mu_{it})$$

where

$$\mu_{it} = \alpha_i \lambda_{it} = \alpha_i \exp(\mathbf{x}'_{it} \boldsymbol{\beta}), \quad i = 1, \dots, N, \quad t = 1, \dots, T$$

Here, α_i are the individual effects.

In the fixed effects model, the α_i are unknown parameters. The fixed effects model can be estimated by eliminating α_i by conditioning on $\sum_t y_{it}$.

In the random effects model, the α_i are independent and identically distributed (iid) random variables, in contrast to the fixed effects model. The random effects model can then be estimated by assuming a distribution for α_i .

In the Poisson fixed effects model, conditional on λ_{it} and parameter α_i , y_{it} is iid Poisson distributed with parameter $\mu_{it} = \alpha_i \lambda_{it} = \alpha_i \exp(\mathbf{x}'_{it} \boldsymbol{\beta})$, and x_{it} does not include an intercept. Then, the conditional joint density for the outcomes within the i th panel is

$$\begin{aligned} P[y_{i1}, \dots, y_{iT_i} | \sum_{t=1}^{T_i} y_{it}] &= P[y_{i1}, \dots, y_{iT_i}, \sum_{t=1}^{T_i} y_{it}] / P[\sum_{t=1}^{T_i} y_{it}] \\ &= P[y_{i1}, \dots, y_{iT_i}] / P[\sum_{t=1}^{T_i} y_{it}] \end{aligned}$$

Since y_{it} is iid Poisson(μ_{it}), $P[y_{i1}, \dots, y_{iT_i}]$ is the product of T_i Poisson densities. Also, $(\sum_{t=1}^{T_i} y_{it})$ is Poisson($\sum_{t=1}^{T_i} \mu_{it}$). Then,

$$\begin{aligned}
 P[y_{i1}, \dots, y_{iT_i} | \sum_{t=1}^{T_i} y_{it}] &= \frac{\sum_{t=1}^{T_i} (\exp(-\mu_{it}) \mu_{it}^{y_{it}} / y_{it}!)}{\exp(-\sum_{t=1}^{T_i} \mu_{it}) (\sum_{t=1}^{T_i} \mu_{it})^{\sum_{t=1}^{T_i} y_{it}} / (\sum_{t=1}^{T_i} y_{it})!} \\
 &= \frac{\exp(-\sum_{t=1}^{T_i} \mu_{it}) (\prod_{t=1}^{T_i} \mu_{it}^{y_{it}}) (\prod_{t=1}^{T_i} y_{it}!)}{\exp(-\sum_{t=1}^{T_i} \mu_{it}) \prod_{t=1}^{T_i} (\sum_{s=1}^{T_i} \mu_{is})^{y_{it}} / (\sum_{t=1}^{T_i} y_{it})!} \\
 &= \frac{(\sum_{t=1}^{T_i} y_{it})!}{(\prod_{t=1}^{T_i} y_{it}!)} \prod_{t=1}^{T_i} \left(\frac{\mu_{it}}{\sum_{s=1}^{T_i} \mu_{is}} \right)^{y_{it}} \\
 &= \frac{(\sum_{t=1}^{T_i} y_{it})!}{(\prod_{t=1}^{T_i} y_{it}!)} \prod_{t=1}^{T_i} \left(\frac{\lambda_{it}}{\sum_{s=1}^{T_i} \lambda_{is}} \right)^{y_{it}}
 \end{aligned}$$

Thus, the conditional log-likelihood function of the fixed effects Poisson model is given by

$$\mathcal{L} = \sum_{i=1}^N \left[\ln \left(\left(\sum_{t=1}^{T_i} y_{it} \right)! \right) - \sum_{t=1}^{T_i} \ln(y_{it}!) + \sum_{t=1}^{T_i} y_{it} \ln \left(\frac{\lambda_{it}}{\sum_{s=1}^{T_i} \lambda_{is}} \right) \right]$$

The gradient is

$$\begin{aligned}
 \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{i=1}^N \sum_{t=1}^{T_i} y_{it} \mathbf{x}_{it} - \sum_{i=1}^N \sum_{t=1}^{T_i} \left[\frac{y_{it} \sum_{s=1}^{T_i} (\exp(\mathbf{x}'_{is} \boldsymbol{\beta}) \mathbf{x}_{is})}{\sum_{s=1}^{T_i} \exp(\mathbf{x}'_{is} \boldsymbol{\beta})} \right] \\
 &= \sum_{i=1}^N \sum_{t=1}^{T_i} y_{it} (\mathbf{x}_{it} - \bar{\mathbf{x}}_i)
 \end{aligned}$$

where

$$\bar{\mathbf{x}}_i = \sum_{s=1}^{T_i} \left(\frac{\exp(\mathbf{x}'_{is} \boldsymbol{\beta})}{\sum_{k=1}^{T_i} \exp(\mathbf{x}'_{ik} \boldsymbol{\beta})} \right) \mathbf{x}_{is}$$

Panel Data Poisson Regression with Random Effects

In the Poisson random effects model, conditional on λ_{it} and parameter α_i , y_{it} is iid Poisson distributed with parameter $\mu_{it} = \alpha_i \lambda_{it} = \alpha_i \exp(\mathbf{x}'_{it} \boldsymbol{\beta})$, and the individual effects, α_i , are assumed to be iid random variables. The joint density for observations in all time periods for the i th individual, $P[y_{i1}, \dots, y_{iT_i} | \lambda_{i1}, \dots, \lambda_{iT_i}]$, can be obtained after the density $g(\alpha)$ of α_i is specified.

Let

$$\alpha_i \sim \text{iid gamma}(\theta, \theta)$$

so that $E(\alpha_i) = 1$ and $V(\alpha_i) = 1/\theta$:

$$g(\alpha_i) = \frac{\theta^\theta}{\Gamma(\theta)} \alpha_i^{\theta-1} \exp(-\theta\alpha_i)$$

Let $\lambda_i = (\lambda_{i1}, \dots, \lambda_{iT_i})$. Since y_{it} is conditional on λ_{it} and parameter α_i is iid Poisson($\mu_{it} = \alpha_i \lambda_{it}$), the conditional joint probability for observations in all time periods for the i th individual, $P[y_{i1}, \dots, y_{iT_i} | \lambda_i, \alpha_i]$, is the product of T_i Poisson densities:

$$\begin{aligned} P[y_{i1}, \dots, y_{iT_i} | \lambda_i, \alpha_i] &= \prod_{t=1}^{T_i} P[y_{it} | \lambda_{it}, \alpha_i] \\ &= \prod_{t=1}^{T_i} \left[\frac{\exp(-\mu_{it}) \mu_{it}^{y_{it}}}{y_{it}!} \right] \\ &= \left[\prod_{t=1}^{T_i} \frac{e^{-\alpha_i \lambda_{it}} (\alpha_i \lambda_{it})^{y_{it}}}{y_{it}!} \right] \\ &= \left[\prod_{t=1}^{T_i} \lambda_{it}^{y_{it}} / y_{it}! \right] \left(e^{-\alpha_i \sum_t \lambda_{it}} \alpha_i^{\sum_t y_{it}} \right) \end{aligned}$$

Then, the joint density for the i th panel conditional on just the λ can be obtained by integrating out α_i :

$$\begin{aligned} P[y_{i1}, \dots, y_{iT_i} | \lambda_i] &= \int_0^\infty P[y_{i1}, \dots, y_{iT_i} | \lambda_i, \alpha_i] g(\alpha_i) d\alpha_i \\ &= \frac{\theta^\theta}{\Gamma(\theta)} \left[\prod_{t=1}^{T_i} \frac{\lambda_{it}^{y_{it}}}{y_{it}!} \right] \int_0^\infty \exp(-\alpha_i \sum_t \lambda_{it}) \alpha_i^{\sum_t y_{it}} \alpha_i^{\theta-1} \exp(-\theta\alpha_i) d\alpha_i \\ &= \frac{\theta^\theta}{\Gamma(\theta)} \left[\prod_{t=1}^{T_i} \frac{\lambda_{it}^{y_{it}}}{y_{it}!} \right] \int_0^\infty \exp \left[-\alpha_i \left(\theta + \sum_t \lambda_{it} \right) \right] \alpha_i^{\theta + \sum_t y_{it} - 1} d\alpha_i \\ &= \left[\prod_{t=1}^{T_i} \frac{\lambda_{it}^{y_{it}}}{y_{it}!} \right] \frac{\Gamma(\theta + \sum_t y_{it})}{\Gamma(\theta)} \\ &\quad \times \left(\frac{\theta}{\theta + \sum_t \lambda_{it}} \right)^\theta \left(\theta + \sum_t \lambda_{it} \right)^{-\sum_t y_{it}} \\ &= \left[\prod_{t=1}^{T_i} \frac{\lambda_{it}^{y_{it}}}{y_{it}!} \right] \frac{\Gamma(\alpha^{-1} + \sum_t y_{it})}{\Gamma(\alpha^{-1})} \\ &\quad \times \left(\frac{\alpha^{-1}}{\alpha^{-1} + \sum_t \lambda_{it}} \right)^{\alpha^{-1}} \left(\alpha^{-1} + \sum_t \lambda_{it} \right)^{-\sum_t y_{it}} \end{aligned}$$

where $\alpha (= 1/\theta)$ is the overdispersion parameter. This is the density of the Poisson random effects model with gamma-distributed random effects. For this distribution, $E(y_{it}) = \lambda_{it}$ and $V(y_{it}) = \lambda_{it} + \alpha \lambda_{it}^2$; that is, there is overdispersion.

Then the log-likelihood function is written as

$$\begin{aligned}\mathcal{L} = & \sum_{i=1}^N \left\{ \sum_{t=1}^{T_i} \ln \left(\frac{\lambda_{it}^{y_{it}}}{y_{it}!} \right) + \alpha^{-1} \ln(\alpha^{-1}) - \alpha^{-1} \ln \left(\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it} \right) \right\} + \\ & \sum_{i=1}^N \left\{ - \left(\sum_{t=1}^{T_i} y_{it} \right) \ln \left(\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it} \right) + \right. \\ & \left. \ln \left[\Gamma \left(\alpha^{-1} + \sum_{t=1}^{T_i} y_{it} \right) \right] - \ln(\Gamma(\alpha^{-1})) \right\}\end{aligned}$$

The gradient is

$$\begin{aligned}\frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{i=1}^N \left\{ \sum_{t=1}^{T_i} y_{it} \mathbf{x}_{it} - \frac{\alpha^{-1} \sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it}}{\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it}} \right\} - \\ & \sum_{i=1}^N \left\{ \left(\sum_{t=1}^{T_i} y_{it} \right) \frac{\sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it}}{\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it}} \right\} \\ \frac{\partial \mathcal{L}}{\partial \boldsymbol{\beta}} &= \sum_{i=1}^N \left\{ \sum_{t=1}^{T_i} y_{it} \mathbf{x}_{it} - \frac{(\alpha^{-1} + \sum_{t=1}^{T_i} y_{it})(\sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it})}{\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it}} \right\}\end{aligned}$$

and

$$\begin{aligned}\frac{\partial \mathcal{L}}{\partial \alpha} &= \sum_{i=1}^N \left\{ -\alpha^{-2} \left[[1 + \ln(\alpha^{-1})] - \frac{(\alpha^{-1} + \sum_{t=1}^{T_i} y_{it})}{(\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it})} - \ln \left(\alpha^{-1} + \sum_{t=1}^{T_i} \lambda_{it} \right) \right] \right\} \\ &+ \sum_{i=1}^N \left\{ -\alpha^{-2} \left[\frac{\Gamma'(\alpha^{-1} + \sum_{t=1}^{T_i} y_{it})}{\Gamma(\alpha^{-1} + \sum_{t=1}^{T_i} y_{it})} - \frac{\Gamma'(\alpha^{-1})}{\Gamma(\alpha^{-1})} \right] \right\}\end{aligned}$$

where $\lambda_{it} = \exp(\mathbf{x}'_{it} \boldsymbol{\beta})$, $\Gamma'(\cdot) = d\Gamma(\cdot)/d(\cdot)$ and $\Gamma'(\cdot)/\Gamma(\cdot)$ is the digamma function.

Panel Data Negative Binomial Regression with Fixed Effects

This section shows the derivation of a negative binomial model with fixed effects. Keep the assumptions of the Poisson-distributed dependent variable

$$y_{it} \sim \text{Poisson}(\mu_{it})$$

But now let the Poisson parameter be random with gamma distribution and parameters (λ_{it}, δ) ,

$$\mu_{it} \sim \Gamma(\lambda_{it}, \delta)$$

where one of the parameters is the exponentially affine function of independent variables $\lambda_{it} = \exp(\mathbf{x}_{it}'\beta)$. Use integration by parts to obtain the distribution of y_{it} ,

$$\begin{aligned} P[y_{it}] &= \int_0^\infty \frac{e^{-\mu_{it}} \mu_{it}^{y_{it}}}{y_{it}!} f(\mu_{it}) d\mu_{it} \\ &= \frac{\Gamma(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it}) \Gamma(y_{it} + 1)} \left(\frac{\delta}{1 + \delta}\right)^{\lambda_{it}} \left(\frac{1}{1 + \delta}\right)^{y_{it}} \end{aligned}$$

which is a negative binomial distribution with parameters (λ_{it}, δ) . Conditional joint distribution is given as

$$\begin{aligned} P[y_{i1}, \dots, y_{iT_i} | \sum_{t=1}^{T_i} y_{it}] &= \left(\prod_{t=1}^{T_i} \frac{\Gamma(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it}) \Gamma(y_{it} + 1)} \right) \\ &\quad \times \left(\frac{\Gamma(\sum_{t=1}^{T_i} \lambda_{it}) \Gamma(\sum_{t=1}^{T_i} y_{it} + 1)}{\Gamma(\sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it})} \right). \end{aligned}$$

Hence, the conditional fixed-effects negative binomial log-likelihood is

$$\begin{aligned} \mathcal{L} &= \sum_{i=1}^N \left[\log \Gamma \left(\sum_{t=1}^{T_i} \lambda_{it} \right) + \log \Gamma \left(\sum_{t=1}^{T_i} y_{it} + 1 \right) - \log \Gamma \left(\sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right) \right] \\ &\quad + \sum_{i=1}^N \sum_{t=1}^{T_i} [\log \Gamma(\lambda_{it} + y_{it}) - \log \Gamma(\lambda_{it}) - \log \Gamma(y_{it} + 1)]. \end{aligned}$$

The gradient is

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \beta} &= \sum_{i=1}^N \left[\left(\frac{\Gamma'(\sum_{t=1}^{T_i} \lambda_{it})}{\Gamma(\sum_{t=1}^{T_i} \lambda_{it})} - \frac{\Gamma'(\sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it})}{\Gamma(\sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it})} \right) \sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it} \right] \\ &\quad + \sum_{i=1}^N \frac{\Gamma'(\sum_{t=1}^{T_i} y_{it} + 1)}{\Gamma(\sum_{t=1}^{T_i} y_{it} + 1)} \\ &\quad + \sum_{i=1}^N \sum_{t=1}^{T_i} \left[\left(\frac{\Gamma'(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it} + y_{it})} - \frac{\Gamma'(\lambda_{it})}{\Gamma(\lambda_{it})} \right) \lambda_{it} \mathbf{x}_{it} - \frac{\Gamma'(y_{it} + 1)}{\Gamma(y_{it} + 1)} \right]. \end{aligned}$$

Panel Data Negative Binomial Regression with Random Effects

This section describes the derivation of negative binomial model with random effects. Suppose

$$y_{it} \sim \text{Poisson}(\mu_{it})$$

with the Poisson parameter distributed as gamma,

$$\mu_{it} \sim \Gamma(v_i \lambda_{it}, \delta)$$

where its parameters are also random:

$$v_i \lambda_{it} = \exp(\mathbf{x}'_{it} \beta + \eta_{it})$$

Assume that the distribution of a function of v_i is beta with parameters (a, b) :

$$\frac{v_i}{1 + v_i} \sim \text{Beta}(a, b).$$

Explicitly, the beta density with $[0, 1]$ domain is

$$f(z) = [B(a, b)]^{-1} z^{a-1} (1 - z)^{b-1}$$

where $B(a, b)$ is the beta function. Then, conditional joint distribution of dependent variables is

$$P[y_{i1}, \dots, y_{iT_i} | \mathbf{x}_{i1}, \dots, \mathbf{x}_{iT_i}, v_i] = \prod_{t=1}^{T_i} \frac{\Gamma(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it}) \Gamma(y_{it} + 1)} \left(\frac{1}{1 + v_i} \right)^{\lambda_{it}} \left(\frac{v_i}{1 + v_i} \right)^{y_{it}}$$

Integrating out the variable v_i yields the following conditional distribution function:

$$\begin{aligned} P[y_{i1}, \dots, y_{iT_i} | \mathbf{x}_{i1}, \dots, \mathbf{x}_{iT_i}] &= \int_0^1 \left[\prod_{t=1}^{T_i} \frac{\Gamma(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it}) \Gamma(y_{it} + 1)} z_i^{\lambda_{it}} (1 - z_i)^{y_{it}} \right] f(z_i) dz_i \\ &= \frac{\Gamma(a + b) \Gamma(a + \sum_{t=1}^{T_i} \lambda_{it}) \Gamma(b + \sum_{t=1}^{T_i} y_{it})}{\Gamma(a) \Gamma(b) \Gamma(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it})} \\ &\quad \times \prod_{t=1}^{T_i} \frac{\Gamma(\lambda_{it} + y_{it})}{\Gamma(\lambda_{it}) \Gamma(y_{it} + 1)}. \end{aligned}$$

Consequently, the conditional log-likelihood function for a negative binomial model with random effects is

$$\begin{aligned} \mathcal{L} &= \sum_{i=1}^N \left[\log \Gamma(a + b) + \log \Gamma\left(a + \sum_{t=1}^{T_i} \lambda_{it}\right) + \log \Gamma\left(b + \sum_{t=1}^{T_i} y_{it}\right) \right] \\ &\quad - \sum_{i=1}^N \left[\log \Gamma(a) + \log \Gamma(b) + \log \Gamma\left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it}\right) \right] \\ &\quad + \sum_{i=1}^N \sum_{t=1}^{T_i} [\log \Gamma(\lambda_{it} + y_{it}) - \log \Gamma(\lambda_{it}) - \log \Gamma(y_{it} + 1)]. \end{aligned}$$

The gradient is

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial \beta} = & \sum_{i=1}^N \left[\frac{\Gamma' \left(a + \sum_{t=1}^{T_i} \lambda_{it} \right)}{\Gamma \left(a + \sum_{t=1}^{T_i} \lambda_{it} \right)} \sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it} + \frac{\Gamma' \left(b + \sum_{t=1}^{T_i} y_{it} \right)}{\Gamma \left(b + \sum_{t=1}^{T_i} y_{it} \right)} \right] \\ & - \sum_{i=1}^N \left[\frac{\Gamma' \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)}{\Gamma \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)} \sum_{t=1}^{T_i} \lambda_{it} \mathbf{x}_{it} \right] \\ & + \sum_{i=1}^N \sum_{t=1}^{T_i} \left[\left(\frac{\Gamma' (\lambda_{it} + y_{it})}{\Gamma (\lambda_{it} + y_{it})} - \frac{\Gamma' (\lambda_{it})}{\Gamma (\lambda_{it})} \right) \lambda_{it} \mathbf{x}_{it} - \frac{\Gamma' (y_{it} + 1)}{\Gamma (y_{it} + 1)} \right], \end{aligned}$$

and

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial a} = & \sum_{i=1}^N \left[\frac{\Gamma' (a + b)}{\Gamma (a + b)} + \frac{\Gamma' \left(a + \sum_{t=1}^{T_i} \lambda_{it} \right)}{\Gamma \left(a + \sum_{t=1}^{T_i} \lambda_{it} \right)} \right] \\ & - \sum_{i=1}^N \left[\frac{\Gamma' (a)}{\Gamma (a)} + \frac{\Gamma' \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)}{\Gamma \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)} \right], \end{aligned}$$

and

$$\begin{aligned} \frac{\partial \mathcal{L}}{\partial b} = & \sum_{i=1}^N \left[\frac{\Gamma' (a + b)}{\Gamma (a + b)} + \frac{\Gamma' \left(b + \sum_{t=1}^{T_i} y_{it} \right)}{\Gamma \left(b + \sum_{t=1}^{T_i} y_{it} \right)} \right] \\ & - \sum_{i=1}^N \left[\frac{\Gamma' (b)}{\Gamma (b)} + \frac{\Gamma' \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)}{\Gamma \left(a + b + \sum_{t=1}^{T_i} \lambda_{it} + \sum_{t=1}^{T_i} y_{it} \right)} \right]. \end{aligned}$$

Computational Resources

The time and memory required by PROC TCOUNTREG are proportional to the number of parameters in the model and the number of observations in the data set being analyzed. Less time and memory are required for smaller models and fewer observations. Also affecting these resources are the method chosen to calculate the variance-covariance matrix and the optimization method. All optimization methods available through the METHOD= option have similar memory use requirements.

The processing time might differ for each method depending on the number of iterations and functional calls needed. The data set is read into memory to save processing time. If not enough memory is available to hold the data, the TCOUNTREG procedure stores the data in a utility file on disk and rereads the data as needed from this file. When this occurs, the execution time of the procedure increases substantially. The gradient and the variance-covariance matrix must be held in memory. If the model has p parameters including the intercept, then at least $8 * (p + p * (p + 1)/2)$ bytes are needed. If the quasi-maximum likelihood method

is used to estimate the variance-covariance matrix (COVEST=QML), an additional $8 * p * (p + 1)/2$ bytes of memory are needed.

Time is also a function of the number of iterations needed to converge to a solution for the model parameters. The number of iterations needed cannot be known in advance. The MAXITER= option can be used to limit the number of iterations that PROC TCOUNTREG does. The convergence criteria can be altered by nonlinear optimization options available in the PROC TCOUNTREG statement. For a list of all the nonlinear optimization options, see Chapter 6, “Nonlinear Optimization Methods.”

Nonlinear Optimization Options

PROC TCOUNTREG uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. In the PROC TCOUNTREG statement, you can specify nonlinear optimization options that are then passed to the NLO subsystem. For a list of all the nonlinear optimization options, see Chapter 6, “Nonlinear Optimization Methods.”

Covariance Matrix Types

The TCOUNTREG procedure enables you to specify the estimation method for the covariance matrix. The COVEST=HESSIAN option estimates the covariance matrix based on the inverse of the Hessian matrix, COVEST=OP uses the outer product of gradients, and COVEST=QML produces the covariance matrix based on both the Hessian and outer product matrices. The default is COVEST=HESSIAN.

While all three methods produce asymptotically equivalent results, they differ in computational intensity and produce results that might differ in finite samples. The COVEST=OP option provides the covariance matrix that is typically the easiest to compute. In some cases, the OP approximation is considered more efficient than the Hessian or QML approximations because it contains fewer random elements. The QML approximation is computationally the most complex because both the outer product of gradients and the Hessian matrix are required. In most cases, OP or Hessian approximations are preferred to QML. The need to use QML approximation arises in some cases when the model is misspecified and the information matrix equality does not hold.

Displayed Output

PROC TCOUNTREG produces the following displayed output.

Iteration History for Parameter Estimates

If you specify the ITPRINT or PRINTALL options in the PROC TCOUNTREG statement, PROC TCOUNTREG displays a table that contains the following information for each iteration. Some information is

specific to the model-fitting procedure chosen (for example, Newton-Raphson, trust region, quasi-Newton).

- iteration number
- number of restarts since the fitting began
- number of function calls
- number of active constraints at the current solution
- value of the objective function (-1 times the log-likelihood value) at the current solution
- change in the objective function from previous iteration
- value of the maximum absolute gradient element
- step size (for Newton-Raphson and quasi-Newton methods)
- slope of the current search direction (for Newton-Raphson and quasi-Newton methods)
- lambda (for trust region method)
- radius value at current iteration (for trust region method)

Model Fit Summary

The “Model Fit Summary” table contains the following information:

- dependent (count) variable name
- number of observations used
- number of missing values in data set, if any
- data set name
- type of model that was fit
- offset variable name, if any
- zero-inflated link function, if any
- zero-inflated offset variable name, if any
- log-likelihood value at solution
- maximum absolute gradient at solution
- number of iterations
- AIC value at solution (a smaller value indicates better fit)
- SBC value at solution (a smaller value indicates better fit)

Under the “Model Fit Summary” is a statement about whether the algorithm successfully converged.

Parameter Estimates

The “Parameter Estimates” table gives the estimates of the model parameters. In zero-inflated (ZI) models, estimates are also given for the ZI intercept and ZI regressor parameters labeled with the prefix “Inf_”. For example, the ZI intercept is labeled “Inf_intercept”. If you specify “Age” as a ZI regressor, then the “Parameter Estimates” table labels the corresponding parameter estimate “Inf_Age”. If you do not list any ZI regressors, then only the ZI intercept term is estimated.

“_Alpha” is the negative binomial dispersion parameter. The t statistic given for “_Alpha” is a test of overdispersion.

Last Evaluation of the Gradient

If you specify the model option ITPRINT, the TCOUNTREG procedure displays the last evaluation of the gradient vector.

Covariance of Parameter Estimates

If you specify the COVB option in the MODEL statement or in the PROC TCOUNTREG statement, the TCOUNTREG procedure displays the estimated covariance matrix, defined as the inverse of the information matrix at the final iteration.

Correlation of Parameter Estimates

If you specify the CORRB option in the MODEL statement or in the PROC TCOUNTREG statement, PROC TCOUNTREG displays the estimated correlation matrix. It is based on the Hessian matrix used at the final iteration.

OUTPUT OUT= Data Set

The OUTPUT statement creates a new SAS data set that contains all the variables in the input data set and, optionally, the estimates of $\mathbf{x}_i' \boldsymbol{\beta}$, the expected value of the response variable, and the probability of the response variable taking on the current value or other values that you specify. In a zero-inflated model, you can also request that the output data set contain the estimates of $\mathbf{z}_i' \boldsymbol{\gamma}$, and the probability that the response is zero as a result of the zero-generating process.

Except for the probability of the current value, these statistics can be computed for all observations in which the regressors are not missing, even if the response is missing. By adding observations with missing response values to the input data set, you can compute these statistics for new observations or for settings of the regressors that are not present in the data without affecting the model fit.

OUTEST= Data Set

The OUTEST= data set has two rows: the first row (with `_TYPE_='PARM'`) contains each of the parameter estimates in the model, and the second row (with `_TYPE_='STD'`) contains the standard errors for the parameter estimates in the model.

If you use the COVOUT option in the PROC TCOUNTREG statement, the OUTEST= data set also contains the covariance matrix for the parameter estimates. The covariance matrix appears in the observations with `_TYPE_='COV'`, and the `_NAME_` variable labels the rows with the parameter names.

The names of the parameters are used as variable names. These are the same names as used in the INIT, BOUNDS, and RESTRICT statements.

ODS Table Names

PROC TCOUNTREG assigns a name to each table it creates. You can use these names to denote the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in Table 30.2.

Table 30.2 ODS Tables Produced in PROC TCOUNTREG

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ClassLevels	Class levels	Default
FitSummary	Summary of nonlinear estimation	Default
ConvergenceStatus	Convergence status	Default
ParameterEstimates	Parameter estimates	Default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlation of parameter estimates	CORRB
InputOptions	Input options	ITPRINT
IterStart	Optimization start	ITPRINT
IterHist	Iteration history	ITPRINT
IterStop	Optimization results	ITPRINT
ParameterEstimatesResults	Parameter estimates	ITPRINT
ParameterEstimatesStart	Parameter estimates	ITPRINT
ProblemDescription	Problem description	ITPRINT

Examples: TCOUNTREG Procedure

Example 30.1: Basic Models

Data Description and Objective

The data set docvisit contains information for approximately 5,000 Australian individuals about the number and possible determinants of doctor visits that were made during a two-week interval. This data set contains a subset of variables taken from the Racd3 data set used by Cameron and Trivedi (1998). The docvisit data set can be found in the SAS/ETS Sample Library.

The variable doctorco represents doctor visits. Additional variables in the data set that you want to evaluate as determinants of doctor visits include sex (coded 0=male, 1=female), age (age in years divided by 100), illness (number of illnesses during the two-week interval, with five or more coded as five), income (annual income in Australian dollars divided by 1,000), and hscore (a general health questionnaire score, where a high score indicates bad health). Summary statistics for these variables are computed in the following statements and presented in [Output 30.1.1](#).

```
proc means data=docvisit;
  var doctorco sex age illness income hscore;
run;
```

Output 30.1.1 Summary Statistics

The MEANS Procedure					
Variable	N	Mean	Std Dev	Minimum	Maximum
doctorco	5190	0.3017341	0.7981338	0	9.0000000
sex	5190	0.5206166	0.4996229	0	1.0000000
age	5190	0.4063854	0.2047818	0.1900000	0.7200000
illness	5190	1.4319846	1.3841524	0	5.0000000
income	5190	0.5831599	0.3689067	0	1.5000000
hscore	5190	1.2175337	2.1242665	0	12.0000000

Poisson Model

The following statements fit a Poisson model to the data by using the covariates SEX, ILLNESS, INCOME, and HSCORE:

```
proc tcountreg data=docvisit;
  model doctorco=sex illness income hscore / dist=poisson printall;
run;
```

In this example, the DIST= option in the MODEL statement specifies the POISSON distribution. In addition, the PRINTALL option displays the correlation and covariance matrices for the parameters, log-likelihood values, and convergence information in addition to the parameter estimates. The parameter estimates for this model are shown in [Output 30.1.2](#).

Output 30.1.2 Parameter Estimates of Poisson Model

The TCOUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.855552	0.074545	-24.89	<.0001
sex	1	0.235583	0.054362	4.33	<.0001
illness	1	0.270326	0.017080	15.83	<.0001
income	1	-0.242095	0.077829	-3.11	0.0019
hscore	1	0.096313	0.009089	10.60	<.0001

Using the CLASS statement

If some regressors are categorical in nature (meaning that these variables can take only a few discrete qualitative values), specify them in the CLASS statement. In this example, SEX is categorical because it takes only two values. A class variable can be numeric or character.

Consider the following extension:

```
proc tcountreg data=docvisit;
  class sex;
  model doctorco=sex illness income hscore / dist=poisson;
run;
```

The partial output is given in [Output 30.1.3](#).

Output 30.1.3 Parameter Estimates of Poisson Model with CLASS statement

The TCOUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.619969	0.063985	-25.32	<.0001
sex 0	1	-0.235583	0.054362	-4.33	<.0001
sex 1	0	0	.	.	.
illness	1	0.270326	0.017080	15.83	<.0001
income	1	-0.242095	0.077829	-3.11	0.0019
hscore	1	0.096313	0.009089	10.60	<.0001

If the CLASS statement is present, the TCOUNTREG procedure creates as many indicator or dummy variables as there are categories in a class variable and uses them as independent variables. In order to avoid collinearity with the intercept, the last-created dummy variable is assigned a zero coefficient by default. This means that only the dummy variable that is associated with the first level of sex (male=0) is used as a regressor. Consequently, the estimated coefficient for this dummy variable is the negative of the one for the original SEX variable in [Output 30.1.2](#) because the reference level has switched from male to female.

Now consider a more practical task. The previous example implicitly assumed that each additional illness during the two-week interval has the same effect. In other words, this variable was thought of as a continuous variable. But this variable has only six values, and it is quite possible that the number of illnesses has a nonlinear effect on doctor visits. In order to check this conjecture, the following statements specify ILLNESS in the CLASS statement so that it is represented in the model by a set of six dummy variables that can account for any type of nonlinearity:

```
proc tcountreg data=docvisit;
  class sex illness;
  model doctorco=sex illness income hscore / dist=poisson;
run;
```

The parameter estimates are displayed in [Output 30.1.4](#).

Output 30.1.4 Parameter Estimates of Poisson Model with CLASS statement

The TCOUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-0.385930	0.088062	-4.38	<.0001
sex 0	1	-0.219118	0.054190	-4.04	<.0001
sex 1	0	0	.	.	.
illness 0	1	-1.934983	0.121267	-15.96	<.0001
illness 1	1	-0.698307	0.089732	-7.78	<.0001
illness 2	1	-0.471100	0.090742	-5.19	<.0001
illness 3	1	-0.488481	0.099127	-4.93	<.0001
illness 4	1	-0.272372	0.107593	-2.53	0.0114
illness 5	0	0	.	.	.
income	1	-0.253583	0.077441	-3.27	0.0011
hscore	1	0.094590	0.009025	10.48	<.0001

Each ILLNESS parameter in this model represents the difference between each effect of ILLNESS and ILLNESS=5. Note that these estimates for different ILLNESS categories do not increase linearly, but instead show a relatively large jump from zero illnesses to one followed by relatively smaller increases.

Zero-Inflated Poisson model

Suppose that you suspect that the population of individuals can be viewed as two distinct groups: a low-risk group, consisting of individuals who never go to the doctor, and a high-risk group, consisting of individuals who do go to the doctor. You might suspect that the data have this structure both because the sample variance

of DOCTORCO (0.64) exceeds its sample mean (0.30), which suggests overdispersion, and also because a large fraction of the DOCTORCO observations (80%) have the value zero. Estimating a zero-inflated model is one way to deal with overdispersion that results from excess zeros.

Suppose also that you suspect that the covariate AGE has an impact on whether an individual belongs to the low-risk group. For example, younger individuals might have illnesses of much lower severity when they do get sick and be less likely to visit a doctor, all else being equal. The following statements estimate a zero-inflated Poisson regression with AGE as a covariate in the zero-generation process:

```
proc tcountreg data=docvisit;
  model doctorco=sex illness income hscore / dist=zip;
  zeromodel doctorco ~ age;
run;
```

In this case, the ZEROMODEL statement that follows the MODEL statement specifies that both an intercept and the variable AGE be used to estimate the likelihood of zero doctor visits. [Output 30.1.5](#) shows the resulting parameter estimates.

Output 30.1.5 Parameter Estimates for ZIP Model

The TCOUNTREG Procedure					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	-1.033387	0.096973	-10.66	<.0001
sex	1	0.122511	0.062566	1.96	0.0502
illness	1	0.237478	0.019997	11.88	<.0001
income	1	-0.143945	0.087810	-1.64	0.1012
hscore	1	0.088386	0.010043	8.80	<.0001
Inf_Intercept	1	0.986557	0.131339	7.51	<.0001
Inf_age	1	-2.090923	0.270580	-7.73	<.0001

The estimates of the zero-inflated intercept (Inf_Intercept) and the zero-inflated regression coefficient for AGE (Inf_age) are approximately 0.99 and -2.09, respectively. Since the zero-inflation model uses a logistic link by default, you can estimate the probabilities for individuals of ages 20, 50, and 70 as follows:

$$\begin{aligned}
 \text{20 years: } & \frac{e^{(0.99-2.09*.20)}}{1 + e^{(0.99-2.09*.20)}} = 0.64 \\
 \text{50 years: } & \frac{e^{(0.99-2.09*.50)}}{1 + e^{(0.99-2.09*.50)}} = 0.49 \\
 \text{70 years: } & \frac{e^{(0.99-2.09*.70)}}{1 + e^{(0.99-2.09*.70)}} = 0.38
 \end{aligned}$$

That is, the estimated probability of belonging to the low-risk group is about 0.64 for a 20-year-old individual, 0.49 for a 50-year-old individual, and only 0.38 for a 70-year-old individual. This supports the suspicion that older individuals are more likely to have a positive number of doctor visits.

Alternative models to account for the overdispersion are the negative binomial and the zero-inflated negative binomial models, which can be fit using the DIST=NEGBIN and DIST=ZINB options, respectively.

Example 30.2: ZIP and ZINB Models for Data Exhibiting Extra Zeros

In the study by Long (1997) of the number of published articles by scientists (see the section “Getting Started: TCOUNTREG Procedure” on page 1941), the observed proportion of scientists who publish no articles is 0.3005. The following statements use PROC FREQ to compute the proportion of scientists who publish each observed number of articles. [Output 30.2.1](#) shows the results.

```
proc freq data=long97data;
  table art / out=obs;
run;
```

Output 30.2.1 Proportion of Scientists Who Publish a Certain Number of Articles

The FREQ Procedure				
art	Frequency	Percent	Cumulative Frequency	Cumulative Percent
0	275	30.05	275	30.05
1	246	26.89	521	56.94
2	178	19.45	699	76.39
3	84	9.18	783	85.57
4	67	7.32	850	92.90
5	27	2.95	877	95.85
6	17	1.86	894	97.70
7	12	1.31	906	99.02
8	1	0.11	907	99.13
9	2	0.22	909	99.34
10	1	0.11	910	99.45
11	1	0.11	911	99.56
12	2	0.22	913	99.78
16	1	0.11	914	99.89
19	1	0.11	915	100.00

PROC TCOUNTREG is then used to fit Poisson and negative binomial models to the data. For each model, the PROBCOUNT option computes the probability that the number of published articles is m , for $m = 0$ to 10. The following statements compute the estimates for Poisson and negative binomial models. The MEAN procedure is then used to compute the average probability of a zero response.

```
proc tcountreg data=long97data;
  model art=fem mar kid5 phd ment / dist=poisson;
  output out=predpoi probcount(0 to 10);
run;

proc means mean data=predpoi;
  var p_0;
run;
```

The output from the Poisson model for the TCOUNTREG and MEAN procedures is shown in [Output 30.2.2](#).

Output 30.2.2 Poisson Model Estimation

The TCOUNTREG Procedure					
Model Fit Summary					
Dependent Variable					art
Number of Observations					915
Data Set				WORK.LONG97DATA	
Model				Poisson	
Log Likelihood				-1651	
Maximum Absolute Gradient				3.5741E-9	
Number of Iterations				5	
Optimization Method				Newton-Raphson	
AIC				3314	
SBC				3343	
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.304617	0.102982	2.96	0.0031
fem	1	-0.224594	0.054614	-4.11	<.0001
mar	1	0.155243	0.061375	2.53	0.0114
kid5	1	-0.184883	0.040127	-4.61	<.0001
phd	1	0.012823	0.026397	0.49	0.6271
ment	1	0.025543	0.002006	12.73	<.0001
The MEANS Procedure					
Analysis Variable : P_0 Probability of art taking level=0					
Mean					

0.2092071					

The following statements show the syntax for the negative binomial model:

```
proc tcountreg data=long97data;
  model art=fem mar kid5 phd ment / dist=negbin(p=2) method=qn;
  output out=prednb probcount(0 to 10);
run;

proc means mean data=prednb;
  var p_0;
run;
```

Output 30.2.3 shows the results of the preceding statements.

Output 30.2.3 Negative Binomial Model Estimation

The TCOUNTREG Procedure					
Model Fit Summary					
Dependent Variable					art
Number of Observations					915
Data Set				WORK.LONG97DATA	
Model				NegBin	
Log Likelihood				-1561	
Maximum Absolute Gradient				1.75584E-6	
Number of Iterations				16	
Optimization Method				Quasi-Newton	
AIC				3136	
SBC				3170	
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.256144	0.138560	1.85	0.0645
fem	1	-0.216418	0.072672	-2.98	0.0029
mar	1	0.150489	0.082106	1.83	0.0668
kid5	1	-0.176415	0.053060	-3.32	0.0009
phd	1	0.015271	0.036040	0.42	0.6718
ment	1	0.029082	0.003470	8.38	<.0001
_Alpha	1	0.441620	0.052967	8.34	<.0001
The MEANS Procedure					
Analysis Variable : P_0 Probability of art taking level=0					
Mean					

0.3035957					

For each model, the predicted proportion of zero articles can be calculated as the average predicted probability of zero articles across all scientists. Under the Poisson model, the predicted proportion of zero articles is 0.2092, which considerably underestimates the observed proportion. The negative binomial more closely estimates the proportion of zeros (0.3036). Also, the test of the dispersion parameter, $_Alpha$, in the negative binomial model indicates significant overdispersion ($p < 0.0001$). As a result, the negative binomial model is preferred to the Poisson model.

Another way to account for the large number of zeros in this data set is to fit a zero-inflated Poisson (ZIP) or a zero-inflated negative binomial (ZINB) model. In the following statements, `DIST=ZIP` requests the ZIP model. In the `ZEROMODEL` statement, you can specify the predictors, \mathbf{z} , for the process that generated the additional zeros. The `ZEROMODEL` statement also specifies the model for the probability φ . By default,

a logistic model is used for φ . The default can be changed using the LINK= option. In this particular ZIP model, all variables used to model the article counts are also used to model φ .

```
proc tcountreg data=long97data;
  model art = fem mar kid5 phd ment / dist=zip;
  zeromodel art ~ fem mar kid5 phd ment;
  output out=predzip probcount(0 to 10);
run;

proc means data=predzip mean;
  var p_0;
run;
```

The parameters of the ZIP model are displayed in [Output 30.2.4](#). The first set of parameters gives the estimates of β in the model for the Poisson process mean. Parameters with the prefix “Inf_” are the estimates of γ in the logistic model for φ .

Output 30.2.4 ZIP Model Estimation

The TCOUNTREG Procedure					
Model Fit Summary					
Dependent Variable	art				
Number of Observations	915				
Data Set	WORK.LONG97DATA				
Model	ZIP				
ZI Link Function	Logistic				
Log Likelihood	-1605				
Maximum Absolute Gradient	2.08803E-7				
Number of Iterations	16				
Optimization Method	Newton-Raphson				
AIC	3234				
SBC	3291				
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.640838	0.121306	5.28	<.0001
fem	1	-0.209145	0.063405	-3.30	0.0010
mar	1	0.103751	0.071111	1.46	0.1446
kid5	1	-0.143320	0.047429	-3.02	0.0025
phd	1	-0.006166	0.031008	-0.20	0.8424
ment	1	0.018098	0.002295	7.89	<.0001
Inf_Intercept	1	-0.577060	0.509383	-1.13	0.2573
Inf_fem	1	0.109747	0.280082	0.39	0.6952
Inf_mar	1	-0.354013	0.317611	-1.11	0.2650
Inf_kid5	1	0.217101	0.196481	1.10	0.2692
Inf_phd	1	0.001272	0.145262	0.01	0.9930
Inf_ment	1	-0.134114	0.045244	-2.96	0.0030

Output 30.2.4 *continued*

The MEANS Procedure	
Analysis Variable : P_0 Probability of art taking level=0	
	Mean
-----	-----
	0.2985679
-----	-----

The proportion of zeros predicted by the ZIP model is 0.2986, which is much closer to the observed proportion than the Poisson model. But [Output 30.2.6](#) shows that both models deviate from the observed proportions at one, two, and three articles.

The ZINB model is specified by the DIST=ZINB option. All variables are again used to model both the number of articles and φ . The METHOD=QN option specifies that the quasi-Newton method be used to fit the model rather than the default Newton-Raphson method. These options are implemented in the following statements:

```
proc tcountreg data=long97data;
  model art=fem mar kid5 phd ment / dist=zinb method=qn;
  zeromodel art ~ fem mar kid5 phd ment;
  output out=predzinb probcount(0 to 10);
run;

proc means data=predzinb mean;
  var p_0;
run;
```

The estimated parameters of the ZINB model are shown in [Output 30.2.5](#). The test for overdispersion again indicates a preference for the negative binomial version of the zero-inflated model ($p < 0.0001$). The ZINB model also does a good job of estimating the proportion of zeros (0.3119), and it follows the observed proportions well, though possibly not as well as the negative binomial model.

Output 30.2.5 ZINB Model Estimation

The TCOUNTREG Procedure	
Model Fit Summary	
Dependent Variable	art
Number of Observations	915
Data Set	WORK.LONG97DATA
Model	ZINB
ZI Link Function	Logistic
Log Likelihood	-1550
Maximum Absolute Gradient	0.00591
Number of Iterations	81
Optimization Method	Quasi-Newton
AIC	3126
SBC	3189

Output 30.2.5 continued

Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.416747	0.143596	2.90	0.0037
fem	1	-0.195507	0.075592	-2.59	0.0097
mar	1	0.097583	0.084452	1.16	0.2479
kid5	1	-0.151733	0.054206	-2.80	0.0051
phd	1	-0.000700	0.036270	-0.02	0.9846
ment	1	0.024786	0.003493	7.10	<.0001
Inf_Intercept	1	-0.191679	1.322795	-0.14	0.8848
Inf_fem	1	0.635924	0.848902	0.75	0.4538
Inf_mar	1	-1.499439	0.938648	-1.60	0.1102
Inf_kid5	1	0.628412	0.442777	1.42	0.1558
Inf_phd	1	-0.037719	0.308003	-0.12	0.9025
Inf_ment	1	-0.882281	0.316219	-2.79	0.0053
_Alpha	1	0.376680	0.051029	7.38	<.0001
The MEANS Procedure					
Analysis Variable : P_0 Probability of art taking level=0					
Mean					

0.3119486					

The following statements compute the average predicted count probability across all scientists for each count 0, 1, ..., 10. The averages for each model, along with the observed proportions, are then arranged for plotting by PROC SGPLOT.

```
proc summary data=predpoi;
  var p_0-p_10;
  output out=mnpoi mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=prednb;
  var p_0-p_10;
  output out=mnnb mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=predzip;
  var p_0-p_10;
  output out=mnzip mean(p_0-p_10)=mn0-mn10;
run;
proc summary data=predzinb;
  var p_0-p_10;
  output out=mnzinb mean(p_0-p_10)=mn0-mn10;
run;
```



```

data means;
    set mnpoi mnnb mnzip mnzinb;
    drop _type_ _freq_;
run;

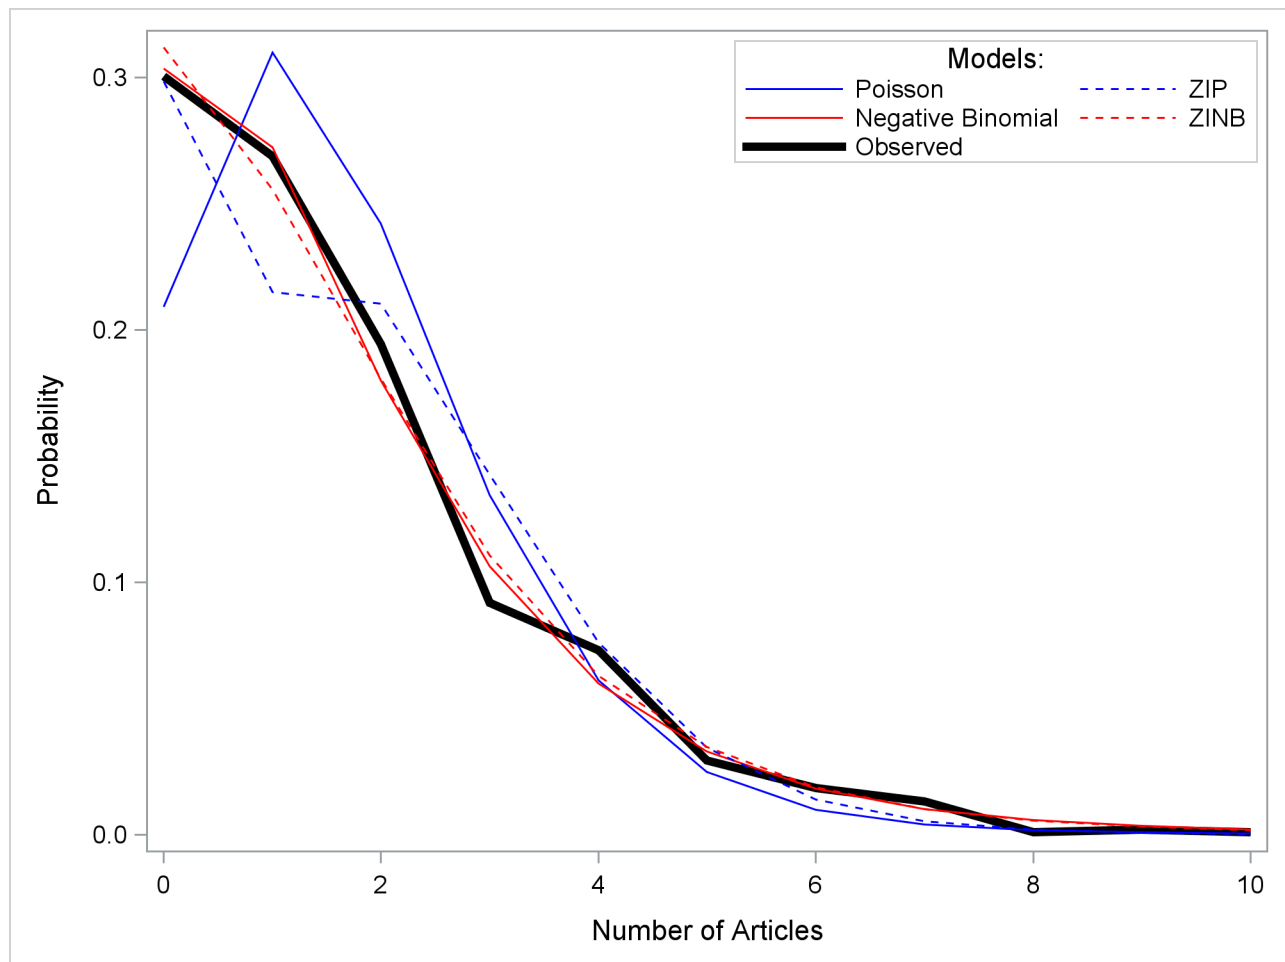
proc transpose data=means out=tmeans;
run;

data allpred;
    merge obs(where=(art<=10)) tmeans;
    obs=percent/100;
run;

proc sgplot;
    yaxis label='Probability';
    xaxis label='Number of Articles';
    series y=obs x=art / name='obs' legendlabel='Observed'
        lineattrs=(color=black thickness=4px);
    series y=col1 x=art / name='poi' legendlabel='Poisson'
        lineattrs=(color=blue);
    series y=col2 x=art / name='nb' legendlabel='Negative Binomial'
        lineattrs=(color=red);
    series y=col3 x=art / name='zip' legendlabel='ZIP'
        lineattrs=(color=blue pattern=2);
    series y=col4 x=art / name='zinb' legendlabel='ZINB'
        lineattrs=(color=red pattern=2);
    discretelegend 'poi' 'zip' 'nb' 'zinb' 'obs' / title='Models:'
        location=inside position=ne across=2 down=3;
run;

```

For each of the four fitted models, [Output 30.2.6](#) shows the average predicted count probability for each article count across all scientists. The Poisson model clearly underestimates the proportion of zero articles published, while the other three models are quite accurate at zero. All of the models do well at the larger numbers of articles.

Output 30.2.6 Average Predicted Count Probability

Example 30.3: Variable Selection

This example demonstrates two algorithms of automatic variable selection in the TCOUNTREG procedure. This method is most effective when the number of possible candidates for explaining the variation of some variable is large. For clarity of exposition, this example uses only a small number of variables. The data set ARTICLE published by Long (1997) contains six variables. This data set was already used in “[Example 30.2: ZIP and ZINB Models for Data Exhibiting Extra Zeros](#)” on page 1985. The dependent variable called art records the number of articles published by a graduate student in the last three years of their program. Explanatory factors include sex of a student (fem), his or her marital status (mar), number of children (kid5), prestige of the program (phd), and publishing activity of the academic adviser (ment). All these variables intuitively suggest their affect on students’ primary academic output.

First, for comparison purposes, estimate the simple Poisson model. The choice of model is specified by DIST= option in the MODEL statement.

```
proc tcountreg data = long97data;
  model art = fem mar kid5 phd ment / dist = poisson;
```

```
run;
```

The output of these statements is shown in [Figure 30.3.1](#).

Output 30.3.1 Poisson Model for the Number of Published Articles

The TCOUNTREG Procedure					
Model Fit Summary					
Dependent Variable					art
Number of Observations					915
Data Set				WORK.LONG97DATA	
Model				Poisson	
Log Likelihood				-1651	
Maximum Absolute Gradient				3.5741E-9	
Number of Iterations				5	
Optimization Method				Newton-Raphson	
AIC				3314	
SBC				3343	
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.304617	0.102982	2.96	0.0031
fem	1	-0.224594	0.054614	-4.11	<.0001
mar	1	0.155243	0.061375	2.53	0.0114
kid5	1	-0.184883	0.040127	-4.61	<.0001
phd	1	0.012823	0.026397	0.49	0.6271
ment	1	0.025543	0.002006	12.73	<.0001

Note that the Newton-Raphson optimization algorithm took five steps to converge. All parameters, except for one, are significant at a 1% or 5% level, while phd is not significant even at the 10% level.

In this case, it might be easy to identify variables with limited explanatory power. However, if the number of variables were large, the manual selection could be time demanding and inaccurate. For a large number of variables, you would be better off by applying one of the automatic algorithms of variable selection. The following statements use the penalized likelihood method, which is indicated by `SELECT=PEN` option in the `MODEL` statement:

```
proc tcountreg data = long97data method = qn;
  model art = fem mar kid5 phd ment / dist = poisson
                    select = PEN;
run;
```

The output of these statements is shown in [Output 30.3.2](#).

Output 30.3.2 Poisson Model for the Number of Published Articles with Penalized Likelihood Method

The TCOUNTREG Procedure					
Model Fit Summary					
Dependent Variable					art
Number of Observations					915
Data Set				WORK.LONG97DATA	
Model				Poisson	
Log Likelihood				-1651	
Maximum Absolute Gradient				4.20414E-6	
Number of Iterations				7	
Optimization Method				Quasi-Newton	
AIC				3312	
SBC				3336	
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.345174	0.060125	5.74	<.0001
fem	1	-0.225303	0.054615	-4.13	<.0001
mar	1	0.152175	0.061067	2.49	0.0127
kid5	1	-0.184993	0.040139	-4.61	<.0001
ment	1	0.025761	0.001950	13.21	<.0001

The “Parameter Estimates” table shows that the variable *phd* was dropped from the model.

The next statements use the information criterion by specifying the SELECT=INFO option. The direction of search is chosen to be FORWARD, and the information criterion is AIC. In order to achieve the same selection of variables as for the penalized likelihood method, 0.001 is specified for the percentage of decrease in the information criterion necessary for the algorithm to stop.

```
proc tcountreg data = long97data;
  model art = fem mar kid5 phd ment / dist      = poisson
                                select      = INFO
                                ( direction = forward
                                criter      = AIC
                                lstop      = 0.001 );
run;
```

The output of these statements is shown in [Figure 30.3.3](#).

Output 30.3.3 Poisson Model for the Number of Published Articles with Search Method Using Information Criterion

The TCOUNTREG Procedure					
Stepwise Selection Information					
Step	Effect Entered	Effect Removed	AIC	SBC	
0	Intercept		3487.146950	3491.965874	
1	ment		3341.286487	3350.924335	
2	fem		3330.744604	3345.201376	
3	kid5		3316.593036	3335.868733	
4	mar		3312.348824	3336.443445	
Model Fit Summary					
Dependent Variable			art		
Number of Observations			915		
Data Set			WORK.LONG97DATA		
Model			Poisson		
Log Likelihood			-1651		
Maximum Absolute Gradient			8.13749E-8		
Number of Iterations			0		
Optimization Method			Newton-Raphson		
AIC			3312		
SBC			3336		
Algorithm converged.					
Parameter Estimates					
Parameter	DF	Estimate	Standard Error	t Value	Approx Pr > t
Intercept	1	0.345174	0.060125	5.74	<.0001
fem	1	-0.225303	0.054615	-4.13	<.0001
mar	1	0.152175	0.061067	2.49	0.0127
kid5	1	-0.184993	0.040139	-4.61	<.0001
ment	1	0.025761	0.001950	13.21	<.0001

From the output, it is clear that the same set of variables was chosen as the result of information criterion algorithm. Note that the forward optimization algorithm starts with the constant as the only explanatory variable.

References

- Abramowitz, M. and Stegun, A. (1970), *Handbook of Mathematical Functions*, New York: Dover Press.
- Amemiya, T. (1985), *Advanced Econometrics*, Cambridge: Harvard University Press.
- Cameron, A. C. and Trivedi, P. K. (1986), "Econometric Models Based on Count Data: Comparisons and Applications of Some Estimators and Some Tests," *Journal of Applied Econometrics*, 1, 29–53.
- Cameron, A. C. and Trivedi, P. K. (1998), *Regression Analysis of Count Data*, Cambridge: Cambridge University Press.
- Fan, J. and Li, R. (2001), "Variable Selection via Nonconcave Penalized Likelihood and Its Oracle Properties," *Journal of the American Statistical Association*, 96, 1348–1360.
- Godfrey, L. G. (1988), *Misspecification Tests in Econometrics*, Cambridge: Cambridge University Press.
- Greene, W. H. (1994), "Accounting for Excess Zeros and Sample Selection in Poisson and Negative Binomial Regression Models," *Working Paper No. 94-10*, New York: Stern School of Business, Department of Economics, New York University.
- Greene, W. H. (2000), *Econometric Analysis*, Upper Saddle River, NJ: Prentice Hall.
- Hausman, J. A., Hall, B. H., and Griliches, Z. (1984), "Econometric Models for Count Data with an Application to the Patents-R&D Relationship," *Econometrica*, 52, 909–938.
- King, G. (1989a), "A Seemingly Unrelated Poisson Regression Model," *Sociological Methods and Research*, 17, 235–255.
- King, G. (1989b), *Unifying Political Methodology: The Likelihood Theory and Statistical Inference*, Cambridge: Cambridge University Press.
- Lambert, D. (1992), "Zero-Inflated Poisson Regression with an Application to Defects in Manufacturing," *Technometrics*, 34, 1–14.
- LaMotte, L. R. (1994), "A Note on the Role of Independence in t Statistics Constructed from Linear Statistics in Regression Models," *The American Statistician*, 48, 238–240.
- Long, J. S. (1997), *Regression Models for Categorical and Limited Dependent Variables*, Thousand Oaks, CA: Sage Publications.
- Park, M. Y. and Hastie, T. (2007) " l_1 -Regularization Path Algorithm for Generalized Linear Models," *Journal of the Royal Statistical Society Series B*, 69, 659–677.
- Searle, S. R. (1971), *Linear Models*, New York: John Wiley & Sons.
- Winkelmann, R. (2000), *Econometric Analysis of Count Data*, Berlin: Springer-Verlag.
- Zou, H. and Li, R. (2008), "One-Step Sparse Estimates in Nonconcave Penalized Likelihood Models," *The Annals of Statistics*, 36, 1509–1533.

Chapter 31

The TIMEID Procedure

Contents

Overview: TIMEID Procedure	1997
Getting Started: TIMEID Procedure	1998
Syntax: TIMEID Procedure	1998
Functional Summary	1999
PROC TIMEID Statement	2000
BY Statement	2001
ID Statement	2001
Details: TIMEID Procedure	2002
Time ID Diagnostics	2002
Diagnostic Output Representation	2003
Inferring Time Intervals and Alignments	2005
Data Set Output	2006
Printed Tabular Output	2009
ODS Graphics	2009
Examples: TIMEID Procedure	2010
Example 31.1: Examining a Weekly Time ID Variable	2010
Example 31.2: Inferring a Date Interval	2018
Example 31.3: Examining Multiple BY Groups	2019

Overview: TIMEID Procedure

The TIMEID procedure evaluates a variable in an input data set for its suitability as a time ID variable in SAS procedures and solutions that are used for time series analysis. PROC TIMEID assesses how well a time interval specification fits SAS date or datetime values, or observation numbers used to index a time series. The time interval used in this analysis can be either specified explicitly as input to PROC TIMEID or inferred by the procedure based on values of the time ID variable. The TIMEID procedure produces diagnostic information in the form of data sets and ODS tabular and plotted output. These diagnostic results summarize characteristics of the time ID variable that can help determine its use as an index in other time series procedures and solutions.

PROC TIMEID is intended for use as a tool to either identify the time interval of a variable or prepare problematic data sets for use in subsequent time series analyses. In particular, this procedure can be used to

investigate inconsistencies between time ID values and the ID statement options used in other SAS procedures and solutions.

Getting Started: TIMEID Procedure

When a data set contains a time ID variable with corrupted, missing, or duplicate values, PROC TIMEID can help isolate and identify these problematic observations. For a data set with a small number of ID variable anomalies and a known time interval, a graphical depiction of the problem areas can be created using the following statements:

```
proc timeid data=<input-dataset> plot=values;
  id <time-ID-variable> interval=<frequency>;
run;
```

For larger data sets whose quality is unknown, it can be useful to get a general overview of the relative number of observations with problematic time ID values. The following statements graphically summarize the prevalence of anomalous time ID values:

```
proc timeid data=<input-dataset> plot=(intervalcounts offsets spans);
  id <time-ID-variable> interval=<frequency>;
run;
```

When prior knowledge of the time interval that separates observations is incomplete, PROC TIMEID can be used to infer the interval by omitting the INTERVAL= option from the ID statement as in the following statements:

```
proc timeid data=<input-dataset> outinterval=<output-dataset>;
  id <time-ID-variable>;
run;
```

Syntax: TIMEID Procedure

The TIMEID procedure uses the following statements:

```
PROC TIMEID options ;
  BY variables ;
  ID variable <options> ;
```


Functional Summary

The statements and options that control the TIMEID procedure are summarized in Table 31.1.

Table 31.1 Syntax Summary

Description	Statement	Option
Statements		
Specifies data sets and options	PROC TIMEID	
Specifies BY-group processing	BY	
Specifies the time ID variable	ID	
Data Set Options		
Specifies the input data set	PROC TIMEID	DATA=
Specifies the maximum number of ID values to analyze	PROC TIMEID	NBYOBS=
Specifies the output frequency count data set	PROC TIMEID	OUTFREQ=
Specifies the output interval data set	PROC TIMEID	OUTINTERVAL=
Specifies the detailed output interval data set	PROC TIMEID	OUTINTERVALDETAILS=
Time ID Options		
Specifies the interval alignment	ID	ALIGN=
Specifies that duplicate time ID values can be present in DATA= data set	ID	DUPLICATES
Specifies the time interval between observations	ID	INTERVAL=
Specifies that time ID variable values are not sorted	ID	NOTSORTED
Printing and Plotting Options		
Specifies the time ID format	ID	FORMAT=
Specifies the types of graphical output	PROC TIMEID	PLOT=
Specifies the types of printed output	PROC TIMEID	PRINT=
Miscellaneous Options		
Limits error and warning messages	PROC TIMEID	MAXERROR=

PROC TIMEID Statement

PROC TIMEID *options* ;

The following options can be used in the PROC TIMEID statement:

DATA=SAS-data-set

names the SAS data set that contains the input data for the procedure. If the DATA= option is not specified, the most recently created SAS data set is used.

MAXERROR=number

limits the number of warning and error messages produced during the execution of the procedure to the specified value. The default is MAXERRORS=50. This option is particularly useful in BY-group processing where it can be used to suppress recurring messages.

NBYOBS=number

limits the number of observations that are used to analyze the time ID variable. The NBYOBS= option should be used instead of the OBS= data set option when BY variables are specified. The NBYOBS= option excludes observations from incomplete BY groups in the analysis. This option guarantees that any truncation of the DATA= data set occurs at a BY-group boundary. Only BY groups that are completely contained within the first *number* of observations are processed. When the NBYOBS= option is omitted, all observations are processed.

OUTFREQ=SAS-data-set

names the output data set to contain the frequency counts of each unique value of the time ID variable. The frequency counts are performed on time ID values that are recorded in the DATA= data set. The time ID values are not aligned with respect to an interval prior to computation of the frequency counts. See the section “[OUTFREQ= Data Set](#)” on page 2006 for details.

OUTINTERVAL=SAS-data-set

names the output data set to contain the time ID interval information that is summarized across all BY groups in the DATA= data set. See the section “[OUTINTERVAL= Data Set](#)” on page 2006 for details.

OUTINTERVALDETAILS=SAS-data-set

names the output data set to contain the time ID interval information for each BY group. See the section “[OUTINTERVALDETAILS= Data Set](#)” on page 2007 for details.

PLOT(*global-option*)=*request-option* | (*request-options*)

specifies the graphical output desired. By default, the TIMEID procedure produces no graphical output. The following *global-options* are available:

UNPACK | UNPACKPANELS suppresses paneling.

By default, multiple plots can appear in some output panels. Specify UNPACKPANELS to get each plot in a separate panel. The following plot *request-options* are available:

COUNTS | INTCNTS | INTERVALCOUNTS

plots a histogram of the time ID interval counts.

OFFSETS	plots a histogram of the time offsets for the time ID values.
PERIODS SPANS	plots a histogram of the spans between adjacent time ID values.
VALUES	plots a panel of the counts, offsets, and spans for each of the time ID values.
ALL	is equivalent to specifying PLOT=(INTERVALCOUNTS SPANS OFFSETS VALUES).

See the section “[Time ID Diagnostics](#)” on page 2002 for details.

PRINT=*option* | (*options*)

specifies the printed output desired. By default, the TIMEID procedure produces no printed output. The following printing options are available:

COUNTS INTCNTS INTERVALCOUNTS	prints a table that contains the counts of time ID values per interval.
INTERVAL	prints a summary of information about the time interval.
OFFSETS	prints a table that contains the time offsets for the time ID values.
PERIODS SPANS	prints tables that contain statistics on the spans between adjacent time ID values.
VALUES	prints tables that contain offset span and count information for the time ID values.
ALL	is equivalent to specifying PRINT=(INTERVALCOUNTS SPANS INTERVAL OFFSETS VALUES).

See the section “[Time ID Diagnostics](#)” on page 2002 for details.

BY Statement

BY *variables* ;

A BY statement can be used with PROC TIMEID to obtain separate analyses for groups of observations defined by the BY variables.

ID Statement

ID *variable* < *options* > ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable’s values are assumed to be SAS date or datetime values. The ID statement options specify how the time ID values are spaced and aligned relative to a SAS date or datetime interval. The INTERVAL= option specifies the fundamental spacing that is used as the basis for counting intervals, offsets, and spans in the data. Specification of the ID variable in an ID statement is required.

ALIGN=alignment

specifies the alignment of the identifying SAS date or datetime that is used to represent intervals. The value of the ALIGN= option is used in the analysis of the time ID variable. The ALIGN= option accepts the following values: BEGINNING | BEG | B, MIDDLE | MID | M, ENDING | END | E, and INFER. For example, ALIGN=BEGIN specifies that the identifying date for the interval is the beginning date in the interval. If the ALIGN= option is not specified, then the default alignment is BEGIN. ALIGN=INFER specifies that the alignment of values within time intervals be inferred from the time ID values.

DUPLICATES

specifies that multiple observations in the DATA= data set can fall within the same time interval as defined by the time ID variable. When this option is omitted and multiple time ID values are encountered in a single time interval, error messages are written to the SAS log.

FORMAT=format

specifies the SAS format used for time ID values in the data sets and in printed and plotted output that is generated by PROC TIMEID. If the FORMAT= option is not specified, the format applied to the input time ID variable is used. If neither of these formats is specified, the format is inferred from the INTERVAL= option.

INTERVAL=interval

specifies the proposed time interval and shift that describe the time ID values in the input data set. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about the intervals that can be specified. See the section “[Time ID Diagnostics](#)” on page 2002 for more information about how the INTERVAL= option determines the nature of diagnostic information reported by the TIMEID procedure.

If no interval is specified, the procedure attempts to infer an interval from the input time ID values. See the section “[Inferring Time Intervals and Alignments](#)” on page 2005 for details about how the time interval is inferred.

NOTSORTED

specifies that the observations in the DATA= data set are not sorted by the time ID variable. When this option is omitted, error messages are generated for time ID values that are not sorted in ascending order.

Details: TIMEID Procedure

Time ID Diagnostics

For a specified time interval, PROC TIMEID decomposes the raw time ID values in an input data set into the following three quantities, whose values are represented by nonnegative integers at each unique time ID value in the input series:

interval counts the number of observations that share each time interval in the data set.

offsets the numerical difference between a time ID value and the aligned value for that time interval. The unit of measure used to express this distance is days for date values and seconds for datetime values. The offset is computed for each time ID value, t_i , by using the following SAS expression:

$$\text{offset}_i = t_i - \text{INTNX}(\text{interval}, t_i, 0, \text{alignment})$$

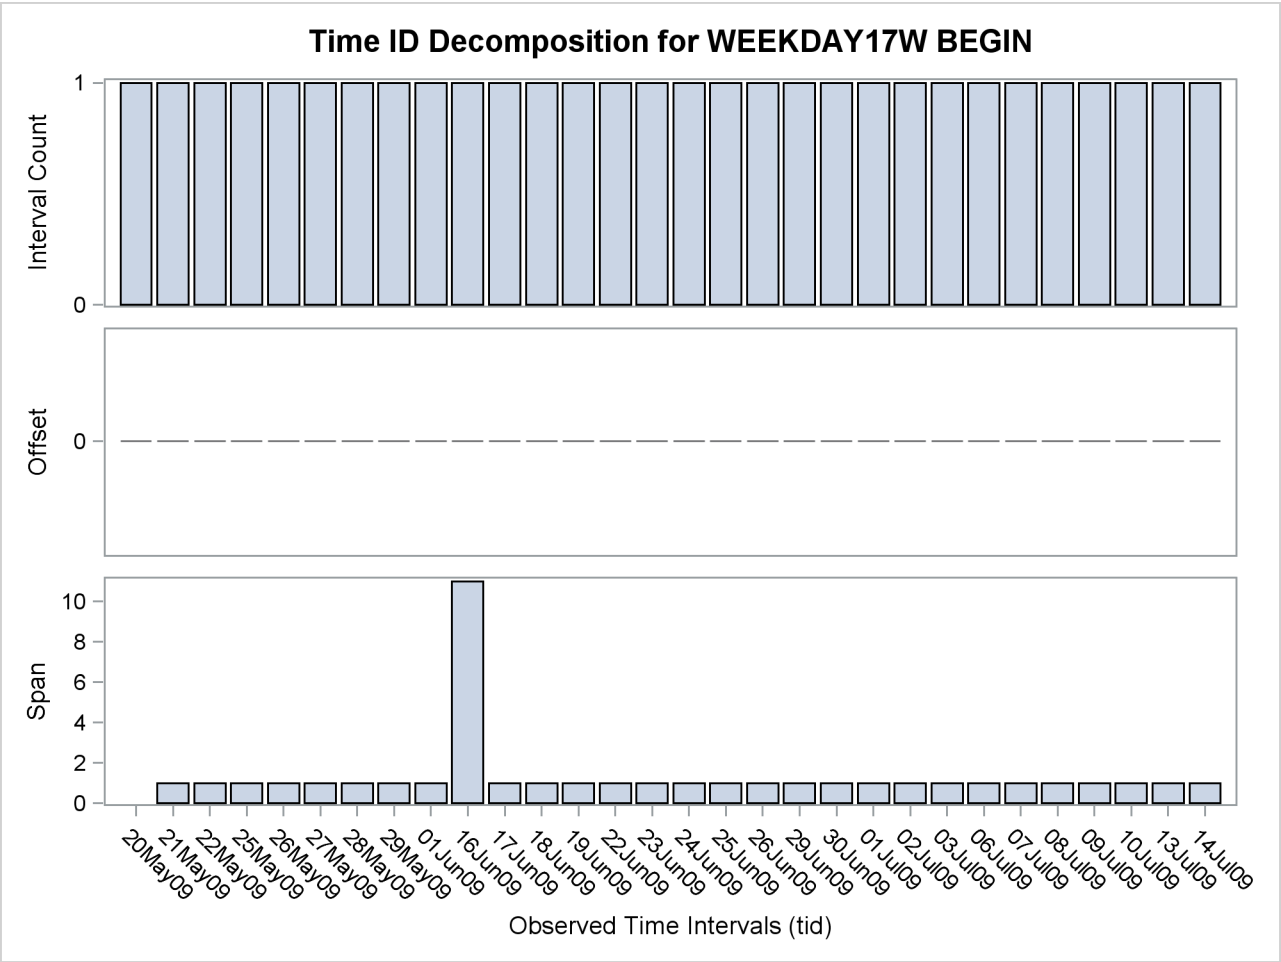
spans the number of intervals between each time ID value and the previous time ID value. The spans value is equivalent to the number returned by the following SAS expression:

$$\text{spans}_i = \text{INTCK}(\text{interval}, t_{i-1}, t_i)$$

Diagnostic Output Representation

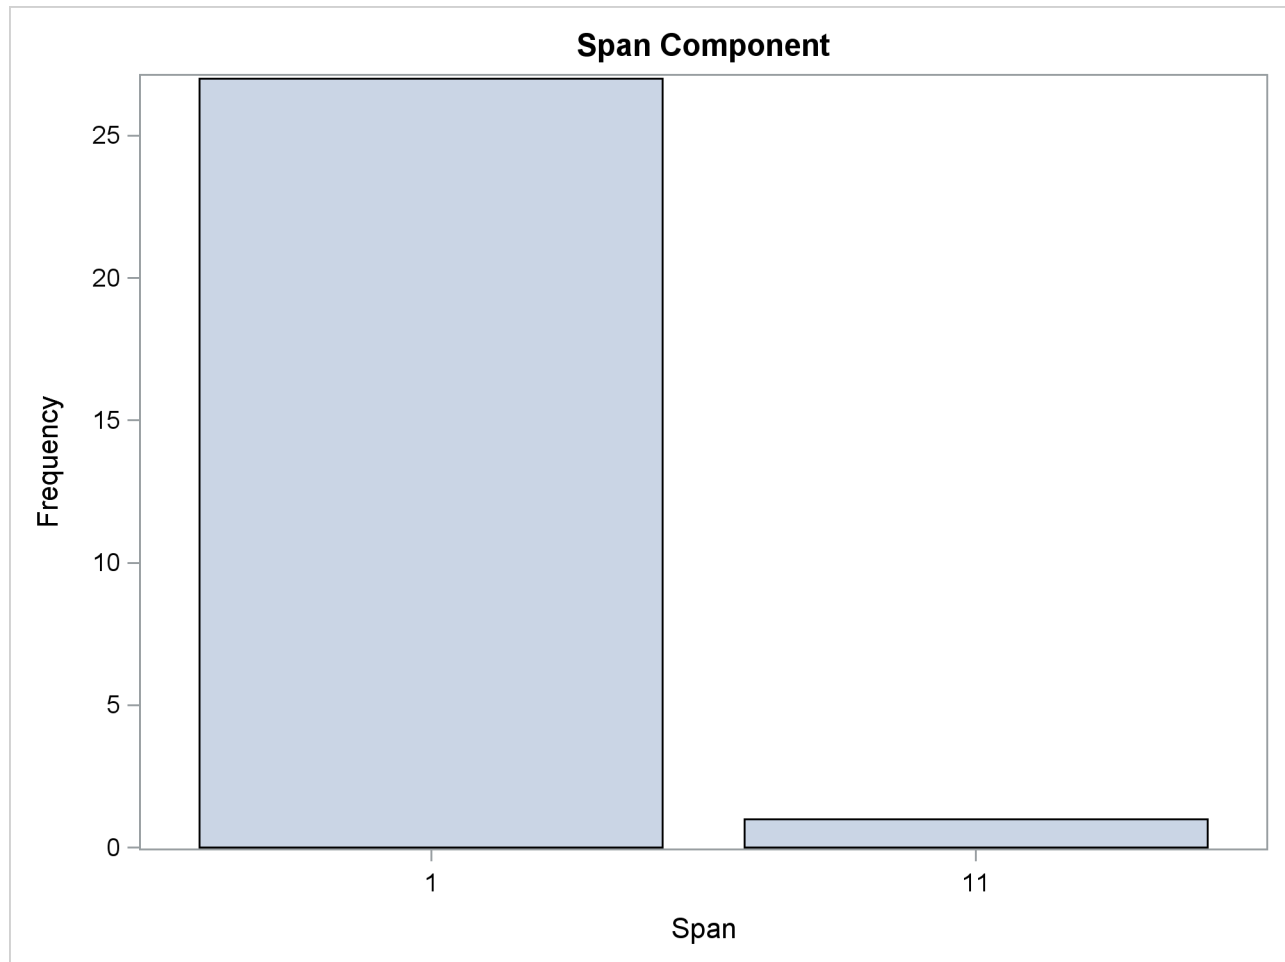
The TIMEID procedure produces time ID diagnostics as both time-ID-based and count-based frequency distributions to expose many of the possible problems that can occur in a time ID variable. The time-ID-based frequency distributions that are generated with the PLOT= option provide a detailed view of time ID values that can isolate problems with specific ID values. [Figure 31.1](#) shows a time series that has a span of 10 observations in a weekday series based on the results of the PLOT=(VALUES SPANS) option. The single large bar in the spans plot shows where data are omitted.

Figure 31.1 Time ID Decomposition



The count-based frequency distributions summarize features of the time ID variable. Individual printed and plotted outputs are available to describe the distribution of the number of spans, offsets, and interval counts that occur in the time ID variable. [Figure 31.2](#) illustrates a count-based frequency distribution of the spans within the weekday series.

Figure 31.2 Span Count Distribution



The large bar at the span of 1 shows that most of the observations are correctly separated by one interval. The bar at 11 indicates that one observation is separated by 11 intervals from the preceding value of the time ID variable. This further illustrates a span of 10 omitted observations.

Inferring Time Intervals and Alignments

When the `INTERVAL=` option is not specified in the `ID` statement, a time interval is inferred from the time ID values in the input data set. The technique used to infer a time interval involves searching for the interval that fits the greatest number of time ID values. First, time ID values are sampled from the input data set to generate a set of candidate intervals. Then the candidate interval that is consistent with greatest number of time ID values is chosen to represent the time series.

When the `ALIGN=INFER` option is specified, the convention that is used to specify time interval alignment is inferred from the time ID variable values by using a similar technique. When both the time interval and its alignment are to be inferred, each of the possible alignments, `BEGIN`, `MIDDLE`, and `END`, are considered in the search. Precedence in the search is given to intervals with the `BEGIN` alignment.

Data Set Output

The TIMEID procedure creates the OUTFREQ=, OUTINTERVAL=, and OUTINTERVALDETAILS= data sets. The OUTFREQ= and OUTINTERVALDETAILS= data sets contain the variables that are specified in the BY statement along with variables that characterize the time ID values. The OUTINTERVAL= option creates a data set without BY variables. The information in this data set summarizes time ID diagnostic information across all BY groups in the DATA= data set.

OUTFREQ= Data Set

The OUTFREQ= data set contains a single observation for each value of the time ID variable in the input data set for each BY group. Additionally, the following variables are written to the OUTFREQ= data set:

COUNT	number of the occurrences of the time ID value
PERCENT	percentage of all time ID values

OUTINTERVAL= Data Set

The OUTINTERVAL= data set contains information that is similar to the variables written to the OUTINTERVALDETAILS= data set; however, the OUTINTERVAL= data set summarizes the information across all BY groups into a single observation. The following variables are written to the OUTINTERVAL= data set:

TIMEID	time ID variable
START	smallest time ID interval
END	largest time ID interval
STARTSHARED	largest starting time ID interval
ENDSHARED	smallest ending time ID interval
NOBS	number of observations
N	number of nonmissing observations
NMISS	number of missing observations
NBY	number of BY groups
NINVALID	number of invalid observations
STATUS	status flag that indicates whether the requested analyses were successful:
0	The analysis completed successfully.
1	interval consistent but data contains gaps
2	interval not consistent with data
10	missing or invalid values found
20	ID values not sorted

	21	duplicate ID values detected
	30	fewer than 3 values found
	4000	Inference of a time interval from the data set failed.
	5000	Diagnosis of the DATA= data set for the specified time interval failed.
MSG		a message that provides further details when the STATUS variable is not zero
INTERVAL		time interval that is specified or recommended
INTNAME		time interval base name that is specified or recommended
MULTIPLIER		time interval multiplier that is specified or recommended
SHIFT_INDEX		time interval shift index that is specified or recommended
ALIGNMENT		time interval alignment that is specified or recommended
SEASONALITY		seasonality determined from specified or recommended time interval
TOTALSEASONCYCLES		total number of seasonal cycles spanned by all the observations
SEASONCYCLESSHARED		number of seasonal cycles that are shared among all BY groups
FORMAT		format of the time ID variable

The START, END, STARTSHARED, and ENDSHARED variables are reported using the interval and alignment specified in the ID statement or inferred from the time ID values.

OUTINTERVALDETAILS= Data Set

The OUTINTERVALDETAILS= data set contains statistics about the time interval that is specified in the ID statement or inferred from the time ID values for each BY group. The following variables represent these statistics:

TIMEID	time ID variable name
START	starting time ID interval
END	ending time ID interval
NOBS	number of observations
N	number of nonmissing observations
NMISS	number of missing observations
NINVALID	number of invalid observations
NINTCNTS	number of unique interval count values
PCTINTCNTS	percentage of interval counts greater than one
MININTCNT	minimum of interval counts
MAXINTCNT	maximum of interval counts
MEANINTCNT	mean of interval counts
STDINTCNT	standard deviation of interval counts
MEDINTCNT	median of interval counts

NOFFSETS	number of time ID offset
PCTOFFSETS	percentage of time ID offset
MINOFFSET	minimum of time ID offsets
MAXOFFSET	maximum of time ID offsets
MEANOFFSET	mean of time ID offsets
STDOFFSET	standard deviation of time ID offsets
MEDOFFSET	median of time ID offsets
NSPANS	number of spans between time ID values
PCTSPANS	percentage of spans between time ID values
MINSPAN	maximum of spans between time ID values
MAXSPAN	minimum of spans between time ID values
MEANSPAN	mean of spans between time ID values
STDSPAN	standard deviation of spans between time ID values
MEDSPAN	median of spans between time ID values
STATUS	status flag that indicates whether the requested analyses were successful:
0	The analysis completed successfully.
1	interval consistent but data contains gaps
2	interval not consistent with data
10	missing or invalid values found
20	ID values not sorted
21	duplicate ID values detected
30	fewer than 3 values found
4000	Inference of a time interval from the data set failed .
5000	Diagnosis of the DATA= data set for specified time interval failed.
MSG	a message that provides further details when the STATUS variable is not zero
INTERVAL	time interval specified or recommended
INTNAME	time interval base name specified or recommended
MULTIPLIER	time interval multiplier specified or recommended
SHIFT_INDEX	time interval shift index specified or recommended
ALIGNMENT	time interval alignment specified or recommended
SEASONALITY	seasonality determined from specified or recommended time interval
NSEASONCYCLES	number of seasonal cycles spanned by the time ID values
FORMAT	format of the time ID variable

The START and END variables are reported using the interval and alignment specified in the ID statement or inferred from the time ID values.

Printed Tabular Output

The TIMEID procedure optionally produces printed output by using the Output Delivery System (ODS). By default, the procedure produces no printed output. The appearance of the printed tabular output is controlled by the PRINT= option in the PROC TIMEID statement.

Table 31.2 relates the PRINT= options to the names of the ODS tables.

Table 31.2 ODS Tables Produced in PROC TIMEID

ODS Name	Description	PRINT= Option
DataSet	Information about the input data set	ALL
Decomposition	Time ID counts, offsets, and spans	VALUES
Interval	Information about the time interval	INTERVAL
IntervalCountsComponent	Frequency distribution of interval counts	INTERVALCOUNTS
IntervalCountsStatistics	Statistics on interval count frequency distribution	INTERVALCOUNTS
OffsetsComponent	Frequency distribution of offsets	OFFSETS
OffsetStatistics	Statistics on offset frequency distribution	OFFSETS
SpansComponent	Frequency distribution of spans	SPANS
SpanStatistics	Statistics on the span frequency distribution	SPANS
Values	Time ID value counts	VALUES
ValueSummary	Summary of the number of valid observations	VALUES

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

The TIMEID procedure uses ODS Graphics to produce plotted output as specified by the PLOT= option. Table 31.3 relates the PLOT= options to the names of the ODS Graphics objects.

Table 31.3 ODS Graphics Produced by the PLOT= Option in PROC TIMEID

ODS Graph Name	Plot Description	PLOT= Option
DecompositionPlot	Panel of spans, offsets, and counts for each time interval	VALUES
IntervalCountsComponentPlot	Histogram of interval counts	INTERVALCOUNTS
IntervalCountsPlot	Plot of counts for each time interval value	VALUES
OffsetComponentPlot	Histogram of time ID offsets	OFFSETS
OffsetsPlot	Plot of offsets for each time interval value	VALUES
SpanComponentPlot	Histogram of span sizes between time ID values	SPANS
SpansPlot	Plot of spans for each time interval value	VALUES
ValuesPlot	Plot of counts of each time ID value	VALUES

Examples: TIMEID Procedure

Example 31.1: Examining a Weekly Time ID Variable

This example illustrates how problems in a weekly time series can be visualized and quantified using the TIMEID procedure's diagnostic capabilities.

The following DATA step creates a data set that contains time values spaced in three week intervals where some weeks have been skipped or duplicated and some have been recorded on different weekdays.

```
data triweek;
    format date date.;
    input date : date. @@;
datalines;
28DEC48 18JAN49 08FEB49 01MAR49 22MAR49 12APR49 03MAY49 24MAY49
17JUN49 05JUL49 26JUL49 16AUG49 06SEP49 27SEP49 18OCT49 08NOV49

... more lines ...
```

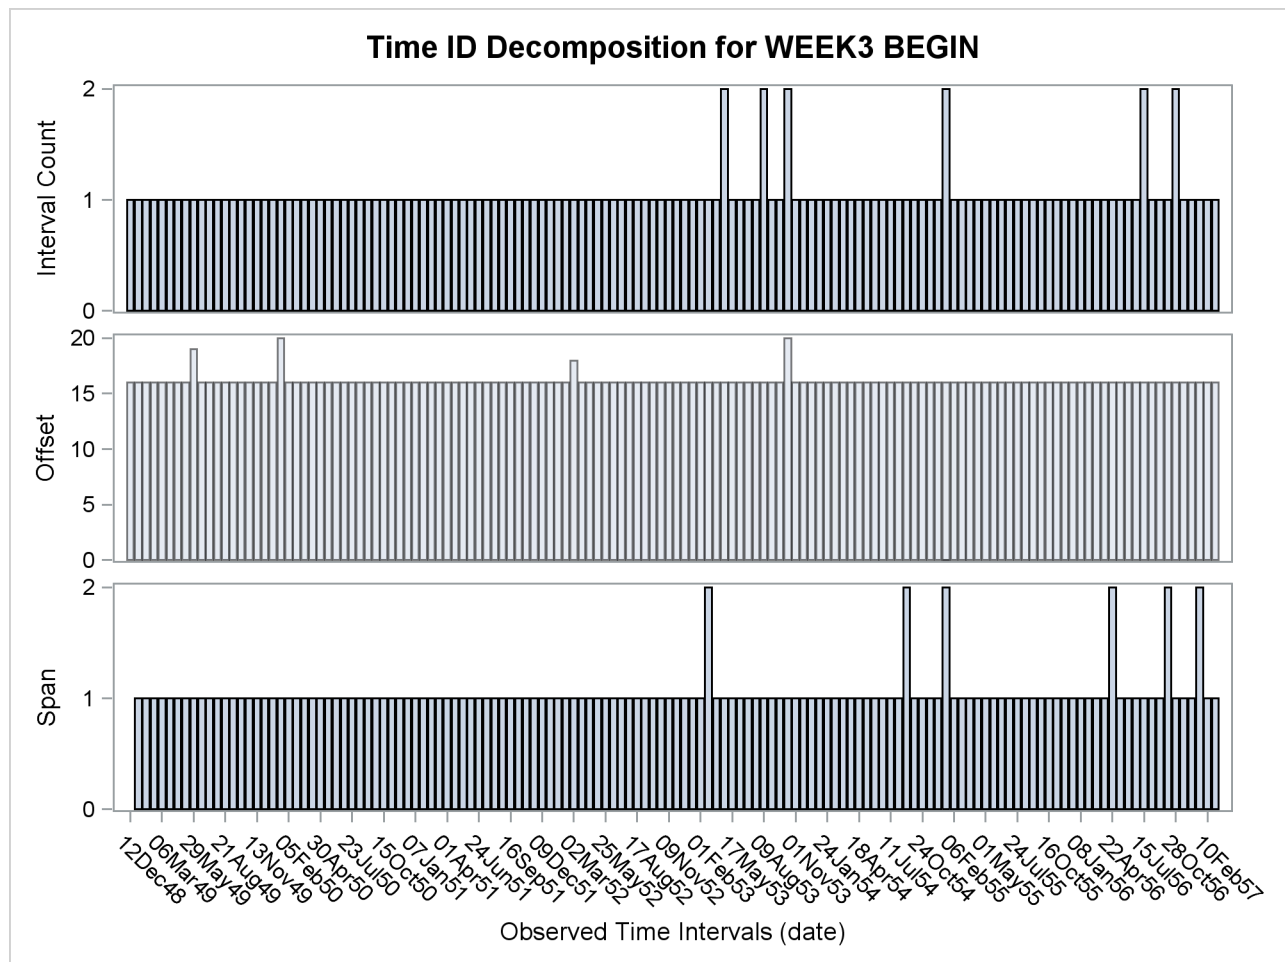
The following TIMEID procedure statements generate an ODS display of the time series that characterizes interval counts, offsets, and spans in the time ID variable.

```
proc timeid data=triweek print=all plot=all;
    id date interval=week3;
run;
```

The Time ID decomposition listing and plot shown in [Output 31.1.1](#) and [Output 31.1.2](#) summarize how well the WEEK3 interval fits the time ID values by showing the number of counts, offsets, and spans for each time interval that is represented by the DATE variable. The listing in [Output 31.1.1](#) has been truncated to include only the first 10 observations. The Time ID plots in [Output 31.1.2](#) indicate that there are duplicated time ID values for a three-week time interval in the Counts plot. The duplicated time intervals have a Count value of 2. The Offsets plot shows which days in the 21 day cycle have been used to record each time interval in the series. The Spans plot records values of 2 for six time intervals where no observations were recorded in the previous interval. The three component plots are histogram summaries of the diagnostic quantities plotted against individual intervals in the decomposition plots. The component plots can be useful in diagnosing time series that contain many time intervals.

Output 31.1.1 Time ID Decomposition Listing

Time Component					
Value					
Index	date	Offset	Span	Interval	Count
1	12DEC48	16	.		1
2	02JAN49	16	1		1
3	23JAN49	16	1		1
4	13FEB49	16	1		1
5	06MAR49	16	1		1
6	27MAR49	16	1		1
7	17APR49	16	1		1
8	08MAY49	16	1		1
9	29MAY49	19	1		1
10	19JUN49	16	1		1

Output 31.1.2 Time ID Decomposition Plot

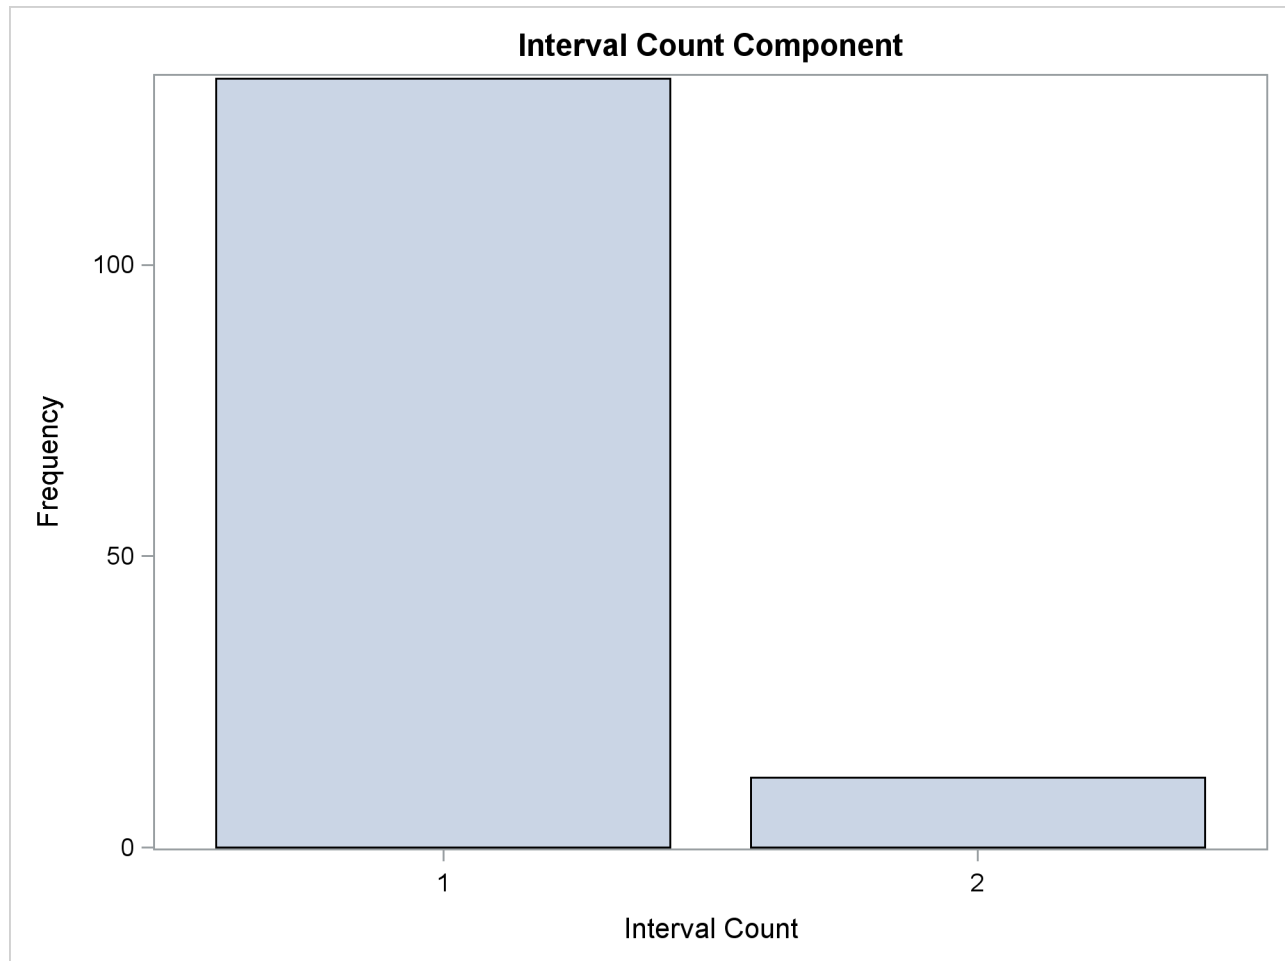
Output 31.1.3 and **Output 31.1.4** describe the distribution of counts of duplicated WEEK3 intervals in the TriWeek data set. For this data set there are 134 intervals that contain one DATE value, and 10 intervals that contain two DATE values.

Output 31.1.3 Time ID Interval Counts Listings

The TIMEID Procedure				
Component				
Value	Interval	Frequency	Percentage	
Index	Count			
1	1	132	91.666667	
2	2	12	8.333333	

Output 31.1.3 *continued*

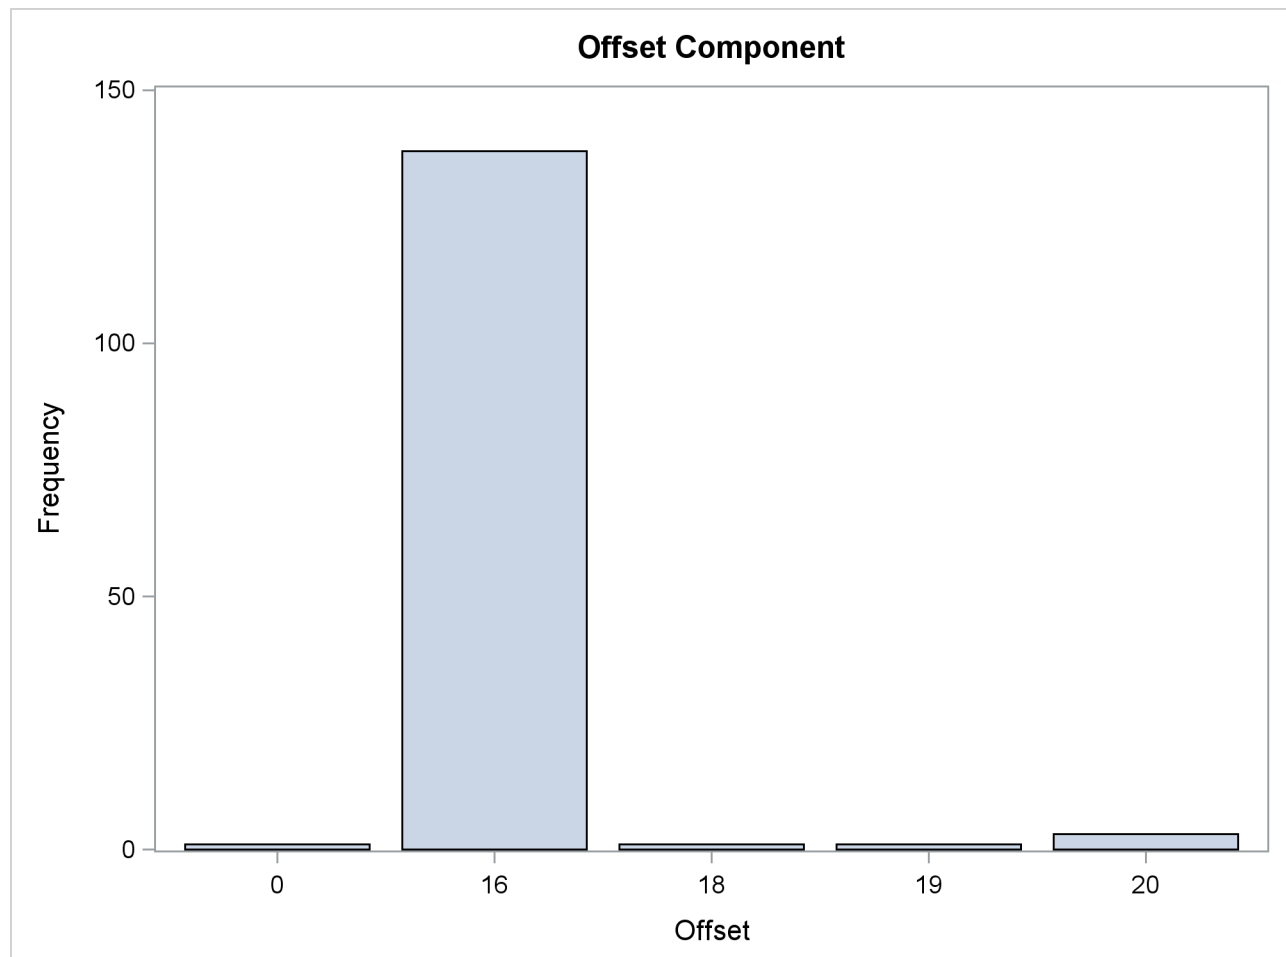
Statistics Summary			
Minimum	Maximum	Mean	Standard Deviation
1	2	1.0833333	1.3008873

Output 31.1.4 Time ID Interval Counts Histogram

The offsets diagnostics [Output 31.1.5](#) and [Output 31.1.6](#) show the distribution of days in the 21-day WEEK3 interval used to record the time intervals in the series. The observations in the TriWeek data set represent intervals with five different offsets from the beginning of the WEEK3 interval: 0, 16, 18, 19 and 20. The high prevalence of intervals with offset 16 indicates that the TriWeek data set would be represented better using the WEEK3.17 interval.

Output 31.1.5 Time ID Offsets Listings

The TIMEID Procedure				
Component				
Value	Offset	Frequency	Percentage	
Index				
1	0	1	0.694444	
2	16	138	95.833333	
3	18	1	0.694444	
4	19	1	0.694444	
5	20	3	2.083333	
Statistics Summary				
Minimum	Maximum	Mean	Standard Deviation	
0	20	16.006944	1.7006205	

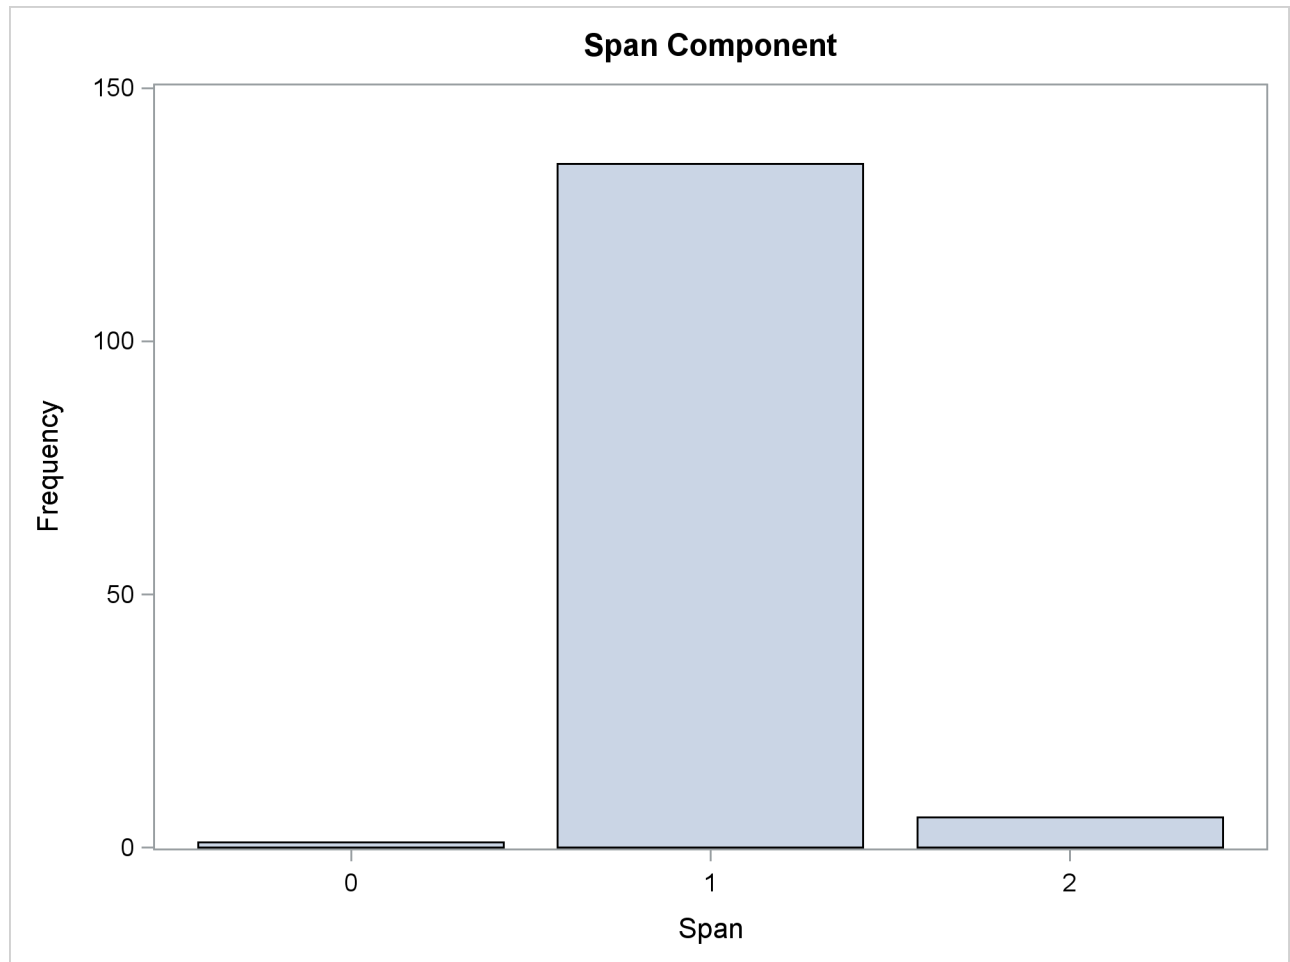
Output 31.1.6 Time ID Offsets Histogram

The span diagnostics [Output 31.1.7](#) and [Output 31.1.8](#) show the distribution of the span sizes between successive DATE values. The TriWeek data set has three different span sizes of widths 0, 1 and 2. Here one span corresponds to the width of a WEEK3 interval.

Output 31.1.7 Time ID Span Listings

The TIMEID Procedure				
Component				
Value Index	Span	Frequency	Percentage	
1	0	1	0.704225	
2	1	135	95.070423	
3	2	6	4.225352	
Statistics Summary				
Minimum	Maximum	Mean	Standard Deviation	
0	2	1.0352113	0.6367974	

Output 31.1.8 Time ID Span Histogram

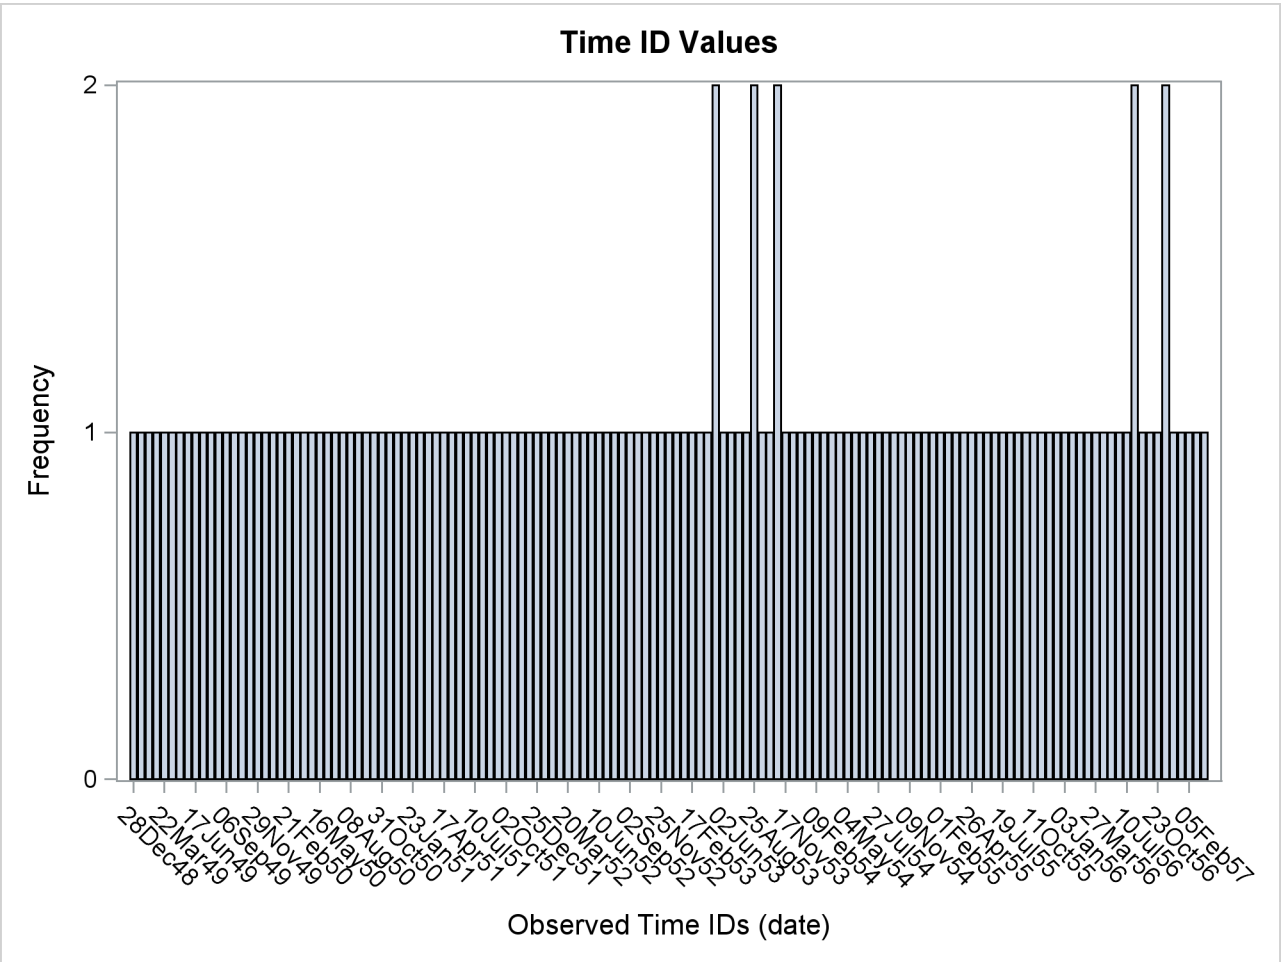


Output 31.1.9 and Output 31.1.10 show the distribution of time ID values before alignment to the WEEK3 interval. The listing in Output 31.1.9 has been truncated to include only the first 10 observations.

Output 31.1.9 Unaligned Time ID Listings

Time ID Values for DATE				
Value Index	date	Frequency	Percentage	
1	28DEC48	1	0.694444	
2	18JAN49	1	0.694444	
3	08FEB49	1	0.694444	
4	01MAR49	1	0.694444	
5	22MAR49	1	0.694444	
6	12APR49	1	0.694444	
7	03MAY49	1	0.694444	
8	24MAY49	1	0.694444	
9	17JUN49	1	0.694444	
10	05JUL49	1	0.694444	

Output 31.1.10 Unaligned Time ID Histogram



Example 31.2: Inferring a Date Interval

This example illustrates how a time ID variable can be inferred from a data set when a sufficient number of observations are present.

```
data workdays;
  format day weekdate.;
  input day : date. @@;
  datalines;
01AUG09 06AUG09 11AUG09 14AUG09 19AUG09 22AUG09
27AUG09 01SEP09 04SEP09 09SEP09 12SEP09 17SEP09
;

proc timeid data=workdays print=interval;
  id day;
run;
```

The 12 observations in the WorkDays data set are enough to determine that the DAY time ID variable is represented by the WEEKDAY12W3 interval. The WEEKDAY12W3 interval corresponds to every third day of the week excluding Sundays and Mondays. Characteristics of this interval are shown in [Output 31.2.1](#).

Output 31.2.1 Inferred Time Interval Information

The TIMEID Procedure	
Time Interval Analysis Summary	
Time ID Variable	day
Time Interval	WEEKDAY12W3
Base Name	WEEKDAY
Multiplier	3
Shift	0
Length of Seasonal Cycle	5
Time ID Format	WEEKDATE.
Start	Saturday, August 1, 2009
End	Thursday, September 17, 2009

Example 31.3: Examining Multiple BY Groups

This example illustrates how a time ID variable can be examined independently over each BY group and summarized over all observations in the DATA= data set.

```
data bygroups;
  format tid date.;
  input tid : date. by @@;
datalines;

... more lines ...
```

The following TIMEID procedure statements generate two data sets that summarize a data set with four BY groups.

```
proc timeid data=bygroups outintervaldetails=int outinterval=intsum;
  id tid;
  by by;
run;
```

The summarized information in [Output 31.3.1](#) shows that BY groups 2, 3, and 4 in the ByGroups data set contain some duplicate values and spans, and group 1 conforms exactly to the WEEKDAY17W interval. This listing also shows that the date ranges in these two BY groups start and end on different days and that they overlap between December 7, 2009, and December 28, 2009.

Output 31.3.1 Selected Variables in the Combined OUTINTERVALDETAILS= OUTINTERVAL= Data Sets

b y	N	N I N T C N T S	P C T I N T S	N O F F S E T S	P C T O F F S E T S	N P A N S	P C S P A N S	S T A U S	I N T E R V A L	S T A R T
1	25	1	0.00	1	0	1	0.00000	0	WEEKDAY17W	24NOV09
2	25	2	0.08	1	0	2	0.00000	0	WEEKDAY17W	27NOV09
3	25	2	0.16	1	0	2	0.04348	1	WEEKDAY17W	02DEC09
4	25	2	0.24	1	0	2	0.13043	1	WEEKDAY17W	07DEC09
.	100	1	WEEKDAY17W	24NOV09
S T O T A L S E A S O N C A Y L C R E D										
28DEC09	5	5
31DEC09	5	5
05JAN10	5	5
08JAN10	5	4
08JAN10	5	.	07DEC09	28DEC09	4	6	3			

Chapter 32

The TIMESERIES Procedure

Contents

Overview: TIMESERIES Procedure	2022
Getting Started: TIMESERIES Procedure	2023
Syntax: TIMESERIES Procedure	2026
Functional Summary	2026
PROC TIMESERIES Statement	2029
BY Statement	2032
CORR Statement	2033
CROSSCORR Statement	2035
DECOMP Statement	2036
ID Statement	2038
SEASON Statement	2040
SPECTRA Statement	2041
SSA Statement	2043
TREND Statement	2045
VAR and CROSSVAR Statements	2047
Details: TIMESERIES Procedure	2048
Accumulation	2049
Missing Value Interpretation	2051
Time Series Transformation	2051
Time Series Differencing	2052
Descriptive Statistics	2052
Seasonal Decomposition	2052
Correlation Analysis	2055
Cross-Correlation Analysis	2056
Spectral Density Analysis	2057
Singular Spectrum Analysis	2061
Data Set Output	2063
OUT= Data Set	2063
OUTCORR= Data Set	2064
OUTCROSSCORR= Data Set	2065
OUTDECOMP= Data Set	2066
OUTPROCINFO= Data Set	2067
OUTSEASON= Data Set	2067
OUTSPECTRA= Data Set	2068

OUTSSA= Data Set	2069
OUTSUM= Data Set	2069
OUTTREND= Data Set	2070
STATUS Variable Values	2071
Printed Output	2071
ODS Table Names	2072
ODS Graphics Names	2072
Examples: TIMESERIES Procedure	2074
Example 32.1: Accumulating Transactional Data into Time Series Data	2074
Example 32.2: Trend and Seasonal Analysis	2075
Example 32.3: Illustration of ODS Graphics	2080
Example 32.4: Illustration of Spectral Analysis	2084
Example 32.5: Illustration of Singular Spectrum Analysis	2086
References	2089

Overview: TIMESERIES Procedure

The TIMESERIES procedure analyzes time-stamped transactional data with respect to time and accumulates the data into a time series format. The procedure can perform trend and seasonal analysis on the transactions. After the transactional data are accumulated, time domain and frequency domain analysis can be performed on the accumulated time series.

For seasonal analysis of the transaction data, various statistics can be computed for each season. For trend analysis of the transaction data, various statistics can be computed for each time period. The analysis is similar to applying the MEANS procedure of Base SAS software to each season or time period of concern.

After the transactional data are accumulated to form a time series and any missing values are interpreted, the accumulated time series can be functionally transformed using log, square root, logistic, or Box-Cox transformations. The time series can be further transformed using simple and/or seasonal differencing. After functional and difference transformations have been applied, the accumulated and transformed time series can be stored in an output data set. This working time series can then be analyzed further using various time series analysis techniques provided by this procedure or other SAS/ETS procedures.

Time series analyses performed by the TIMESERIES procedure include:

- descriptive (global) statistics
- seasonal decomposition/adjustment analysis
- correlation analysis
- cross-correlation analysis
- spectral analysis

All results of the transactional or time series analysis can be stored in output data sets or printed using the Output Delivery System (ODS).

The TIMESERIES procedure can process large amounts of time-stamped transactional data. Therefore, the analysis results are useful for large-scale time series analysis or (temporal) data mining. All of the results can be stored in output data sets in either a time series format (default) or in a coordinate format (transposed). The time series format is useful for preparing the data for subsequent analysis with other SAS/ETS procedures. For example, the working time series can be further analyzed, modeled, and forecast with other SAS/ETS procedures. The coordinate format is useful when using this procedure with SAS/STAT procedures or SAS Enterprise Miner. For example, clustering time-stamped transactional data can be achieved by using the results of this procedure with the clustering procedures of SAS/STAT and the nodes of SAS Enterprise Miner.

The EXPAND procedure can be used for the frequency conversion and transformations of time series output from this procedure.

Getting Started: TIMESERIES Procedure

This section outlines the use of the TIMESERIES procedure and gives a cursory description of some of the analysis techniques that can be performed on time-stamped transactional data.

Given an input data set that contains numerous transaction variables recorded over time at no specific frequency, the TIMESERIES procedure can form time series as follows:

```
PROC TIMESERIES DATA=<input-data-set>
                OUT=<output-data-set>;
  ID <time-ID-variable> INTERVAL=<frequency>
    ACCUMULATE=<statistic>;
  VAR <time-series-variables>;
RUN;
```

The TIMESERIES procedure forms time series from the input time-stamped transactional data. It can provide results in output data sets or in other output formats by using the Output Delivery System (ODS).

Time-stamped transactional data are often recorded at no fixed interval. Analysts often want to use time series analysis techniques that require fixed-time intervals. Therefore, the transactional data must be accumulated to form a fixed-interval time series.

Suppose that a bank wants to analyze the transactions associated with each of its customers over time. Further, suppose that the data set WORK.TRANSACTIONS contains four variables that are related to these transactions: CUSTOMER, DATE, WITHDRAWAL, and DEPOSITS. The following examples illustrate possible ways to analyze these transactions by using the TIMESERIES procedure.

To accumulate the time-stamped transactional data to form a daily time series based on the accumulated daily totals of each type of transaction (WITHDRAWALS and DEPOSITS), the following TIMESERIES procedure statements can be used:

```

proc timeseries data=transactions
                out=timeseries;
    by customer;
    id date interval=day accumulate=total;
    var withdrawals deposits;
run;

```

The OUT=TIMESERIES option specifies that the resulting time series data for each customer is to be stored in the data set WORK.TIMESERIES. The INTERVAL=DAY option specifies that the transactions are to be accumulated on a daily basis. The ACCUMULATE=TOTAL option specifies that the sum of the transactions is to be calculated. After the transactional data is accumulated into a time series format, many of the procedures provided with SAS/ETS software can be used to analyze the resulting time series data.

For example, the ARIMA procedure can be used to model and forecast each customer's withdrawal data by using an ARIMA(0,1,1)(0,1,1)_s model (where the number of seasons is $s=7$ days in a week) using the following statements:

```

proc arima data=timeseries;
    identify var=withdrawals(1,7) noprint;
    estimate q=(1)(7) outest=estimates noprint;
    forecast id=date interval=day out=forecasts;
quit;

```

The OUTEST=ESTIMATES data set contains the parameter estimates of the model specified. The OUT=FORECASTS data set contains forecasts based on the model specified. See the SAS/ETS ARIMA procedure for more detail.

A single set of transactions can be very large and must be summarized in order to analyze them effectively. Analysts often want to examine transactional data for trends and seasonal variation. To analyze transactional data for trends and seasonality, statistics must be computed for each time period and season of concern. For each observation, the time period and season must be determined and the data must be analyzed based on this determination.

The following statements illustrate how to use the TIMESERIES procedure to perform trend and seasonal analysis of time-stamped transactional data.

```

proc timeseries data=transactions out=out
                outseason=season outtrend=trend;
    by customer;
    id date interval=day accumulate=total;
    var withdrawals deposits;
run;

```

Since the INTERVAL=DAY option is specified, the length of the seasonal cycle is seven (7) where the first season is Sunday and the last season is Saturday. The output data set specified by the OUTSEASON=SEASON option contains the seasonal statistics for each day of the week by each customer. The output data set specified by the OUTTREND=TREND option contains the trend statistics for each day of the calendar by each customer.

Often it is desired to seasonally decompose into seasonal, trend, cycle, and irregular components or to seasonally adjust a time series. The following techniques describe how the changing seasons influence the time series.

The following statements illustrate how to use the *TIMESERIES* procedure to perform seasonal adjustment/decomposition analysis of time-stamped transactional data.

```
proc timeseries data=transactions
    out=out
    outdecomp=decompose;
    by customer;
    id date interval=day accumulate=total;
    var withdrawals deposits;
run;
```

The output data set specified by the *OUTDECOMP=DECOMPOSE* data set contains the decomposed/adjusted time series for each customer.

A single time series can be very large. Often, a time series must be summarized with respect to time lags in order to be efficiently analyzed using time domain techniques. These techniques help describe how a current observation is related to the past observations with respect to the time (season) lag.

The following statements illustrate how to use the *TIMESERIES* procedure to perform time domain analysis of time-stamped transactional data.

```
proc timeseries data=transactions
    out=out
    outcorr=timedomain;
    by customer;
    id date interval=day accumulate=total;
    var withdrawals deposits;
run;
```

The output data set specified by the *OUTCORR=TIMEDOMAIN* data set contains the time domain statistics, such as sample autocorrelations and partial autocorrelations, by each customer.

Sometimes time series data contain underlying patterns that can be identified using spectral analysis techniques. Two kinds of spectral analyses on univariate data can be performed using the *TIMESERIES* procedure. They are singular spectrum analysis and Fourier spectral analysis.

Singular spectrum analysis (SSA) is a technique for decomposing a time series into additive components and categorizing these components based on the magnitudes of their contributions. SSA uses a single parameter, the window length, to quantify patterns in a time series without relying on prior information about the series' structure. The window length represents the maximum lag that is considered in the analysis, and it corresponds to the dimensionality of the principle components analysis (PCA) on which SSA is based. The components are combined into groups to categorize their roles in the SSA decomposition.

Fourier spectral analysis decomposes a time series into a sum of harmonics. In the discrete Fourier transform, the contribution of components at evenly spaced frequencies are quantified in a periodogram and summarized in spectral density estimates.

The following statements illustrate how to use the *TIMESERIES* procedure to analyze time-stamped transactional data without prior information about the series' structure.

```
proc timeseries data=transactions
    outssa=ssa
    outspectra=spectra;
```

```

    by customer;
    id date interval=day accumulate=total;
    var withdrawals deposits;
run;

```

The output data set specified by the OUTSSA=SSA data set contains a singular spectrum analysis of the withdrawals and deposits data. The data set specified by OUTSPECTRA=SPECTRA contains a Fourier spectral decomposition of the same data.

By default, the TIMESERIES procedure produces no printed output.

Syntax: TIMESERIES Procedure

The TIMESERIES Procedure uses the following statements:

```

PROC TIMESERIES options ;
    BY variables ;
    CORR statistics-list / options ;
    CROSSCORR statistics-list / options ;
    CROSSVAR variable-list / options ;
    DECOMP component-list / options ;
    ID variable INTERVAL= interval-option ;
    SEASON statistics-list / options ;
    SPECTRA statistics-list / options ;
    SSA / options ;
    TREND statistics-list / options ;
    VAR variable-list / options ;

```

Functional Summary

Table 32.1 summarizes the statements and options that control the TIMESERIES procedure.

Table 32.1 TIMESERIES Functional Summary

Description	Statement	Option
Statements		
Specifies BY-group processing	BY	
Specifies variables to analyze	VAR	
Specifies cross variables to analyze	CROSSVAR	
Specifies the time ID variable	ID	
Specifies correlation options	CORR	
Specifies cross-correlation options	CROSSCORR	
Specifies decomposition options	DECOMP	
Specifies seasonal statistics options	SEASON	

Description	Statement	Option
Specifies spectral analysis options	SPECTRA	
Specifies SSA options	SSA	
Specifies trend statistics options	TREND	
Data Set Options		
Specifies the input data set	PROC TIMESERIES	DATA=
Specifies the output data set	PROC TIMESERIES	OUT=
Specifies the correlations output data set	PROC TIMESERIES	OUTCORR=
Specifies the cross-correlations output data set	PROC TIMESERIES	OUTCROSSCORR=
Specifies the decomposition output data set	PROC TIMESERIES	OUTDECOMP=
Specifies the SAS log output data set	PROC TIMESERIES	OUTPROCINFO=
Specifies the seasonal statistics output data set	PROC TIMESERIES	OUTSEASON=
Specifies the spectral analysis output data set	PROC TIMESERIES	OUTSPECTRA=
Specifies the SSA output data set	PROC TIMESERIES	OUTSSA=
Specifies the summary statistics output data set	PROC TIMESERIES	OUTSUM=
Specifies the trend statistics output data set	PROC TIMESERIES	OUTTREND=
Accumulation and Seasonality Options		
Specifies the accumulation frequency	ID	INTERVAL=
Specifies the length of seasonal cycle	PROC TIMESERIES	SEASONALITY=
Specifies the interval alignment	ID	ALIGN=
Specifies the interval boundary alignment	ID	BOUNDARYALIGN=
Specifies that time ID variable values not be sorted	ID	NOTSORTED
Specifies the starting time ID value	ID	START=
Specifies the ending time ID value	ID	END=
Specifies the accumulation statistic	ID, VAR, CROSSVAR	ACCUMULATE=
Specifies missing value interpretation	ID, VAR, CROSSVAR	SETMISSING=
Time-Stamped Data Seasonal Statistics Options		
Specifies the form of the output data set	SEASON	TRANSPOSE=

Description	Statement	Option
Fourier Spectral Analysis Options		
Specifies whether to adjust to the series mean	SPECTRA	ADJUSTMEAN=
Specifies confidence limits	SPECTRA	ALPHA=
Specifies the kernel weighting function	SPECTRA	PARZEN BARTLETT TUKEY TRUNC QS
Specifies the domain where kernel functions apply	SPECTRA	DOMAIN=
Specifies the constant kernel scale parameter	SPECTRA	C=
Specifies the exponent kernel scale parameter	SPECTRA	EXPON=
Specifies the periodogram weights	SPECTRA	WEIGHTS
Singular Spectrum Analysis Options		
Specifies whether to adjust to the series mean	SSA	ADJUSTMEAN=
Specifies the grouping of principal components	SSA	GROUPS=
Specifies the window length	SSA	LENGTH=
Specifies the number of time periods in the transposed output	SSA	NPERIODS=
Specifies the division between principal component groupings	SSA	THRESHOLDPCT
Specifies that the output be transposed	SSA	TRANSPPOSE=
Time-Stamped Data Trend Statistics Options		
Specifies the form of the output data set	TREND	TRANSPPOSE=
Specifies the number of time periods to be stored	TREND	NPERIODS=
Time Series Transformation Options		
Specifies simple differencing	VAR, CROSSVAR	DIF=
Specifies seasonal differencing	VAR, CROSSVAR	SDIF=
Specifies transformation	VAR, CROSSVAR	TRANSFORM=
Time Series Correlation Options		
Specifies the list of lags	CORR	LAGS=
Specifies the number of lags	CORR	NLAG=
Specifies the number of parameters	CORR	NPARMS=
Specifies the form of the output data set	CORR	TRANSPPOSE=
Time Series Cross-Correlation Options		
Specifies the list of lags	CROSSCORR	LAGS=
Specifies the number of lags	CROSSCORR	NLAG=
Specifies the form of the output data set	CROSSCORR	TRANSPPOSE=

Description	Statement	Option
Time Series Decomposition Options		
Specifies the mode of decomposition	DECOMP	MODE=
Specifies the Hodrick-Prescott filter parameter	DECOMP	LAMBDA=
Specifies the number of time periods to be stored	DECOMP	NPERIODS=
Specifies the form of the output data set	DECOMP	TRANSPOSE=
Printing Control Options		
Specifies the time ID format	ID	FORMAT=
Specifies which output to print	PROC TIMESERIES	PRINT=
Specifies that detailed output be printed	PROC TIMESERIES	PRINTDETAILS
Miscellaneous Options		
Specifies that analysis variables be processed in sorted order	PROC TIMESERIES	SORTNAMES
Limits error and warning messages	PROC TIMESERIES	MAXERROR=
ODS Graphics Options		
Specifies the cross-variable graphical output	PROC TIMESERIES	CROSSPLOTS=
Specifies the variable graphical output	PROC TIMESERIES	PLOTS=

PROC TIMESERIES Statement

PROC TIMESERIES *options* ;

The following options can be used in the PROC TIMESERIES statement:

DATA= *SAS-data-set*

names the SAS data set that contains the input data for the procedure to create the time series. If the DATA= option is not specified, the most recently created SAS data set is used.

CROSSPLOTS= *option* | (*options*)

specifies the cross-variable graphical output desired. By default, the TIMESERIES procedure produces no graphical output. The following plotting options are available:

SERIES plots the time series (OUT= data set).

CCF plots the cross-correlation functions (OUTCROSSCORR= data set).

ALL same as PLOTS=(SERIES CCF).

For example, CROSSPLOTS=SERIES plots the two time series. The CROSSPLOTS= option produces graphical output for these results by using the Output Delivery System (ODS). The CROSS-

PLOTS= option produces results similar to the data sets listed in parentheses next to the preceding options.

MAXERROR= *number*

limits the number of warning and error messages that are produced during the execution of the procedure to the specified value. The default is MAXERRORS=50. This option is particularly useful in BY-group processing where it can be used to suppress the recurring messages.

OUT= *SAS-data-set*

names the output data set to contain the time series variables specified in the subsequent VAR and CROSSVAR statements. If BY variables are specified, they are also included in the OUT= data set. If an ID variable is specified, it is also included in the OUT= data set. The values are accumulated based on the ID statement INTERVAL= or the ACCUMULATE= option or both. The OUT= data set is particularly useful when you want to further analyze, model, or forecast the resulting time series with other SAS/ETS procedures.

OUTCORR= *SAS-data-set*

names the output data set to contain the univariate time domain statistics.

OUTCROSSCORR= *SAS-data-set*

names the output data set to contain the cross-correlation statistics.

OUTDECOMP= *SAS-data-set*

names the output data set to contain the decomposed and/or seasonally adjusted time series.

OUTPROCINFO= *SAS-data-set*

names the output data set to contain information in the SAS log, specifically the number of notes, errors, and warnings and the number of series processed, analyses requested, and analyses failed.

OUTSEASON= *SAS-data-set*

names the output data set to contain the seasonal statistics. The statistics are computed for each season as specified by the ID statement INTERVAL= option or the PROC TIMESERIES statement SEASONALITY= option. The OUTSEASON= data set is particularly useful when analyzing transactional data for seasonal variations.

OUTSPECTRA= *SAS-data-set*

names the output data set to contain the univariate frequency domain analysis results.

OUTSSA= *SAS-data-set*

names the output data set to contain the singular spectrum analysis result series.

OUTSUM= *SAS-data-set*

names the output data set to contain the descriptive statistics. The descriptive statistics are based on the accumulated time series when the ACCUMULATE= and/or SETMISSING= options are specified in the ID or VAR statements. The OUTSUM= data set is particularly useful when analyzing large numbers of series and a summary of the results are needed.

OUTTREND= *SAS-data-set*

names the output data set to contain the trend statistics. The statistics are computed for each time period as specified by the ID statement INTERVAL= option. The OUTTREND= data set is particularly useful when analyzing transactional data for trends.

PLOTS= *option* | (*options*)

specifies the univariate graphical output desired. By default, the TIMESERIES procedure produces no graphical output. The following plotting options are available:

SERIES	plots the time series (OUT= data set).				
RESIDUAL	plots the residual time series (OUT= data set).				
HISTOGRAM	plots a histogram of the time series values				
CYCLES	plots the seasonal cycles (OUT= data set).				
CORR	plots the correlation panel (OUTCORR= data set).				
ACF	plots the autocorrelation function (OUTCORR= data set).				
PACF	plots the partial autocorrelation function (OUTCORR= data set).				
IACF	plots the inverse autocorrelation function (OUTCORR= data set).				
WN	plots the white noise probabilities (OUTCORR= data set).				
DECOMP	plots the seasonal adjustment panel (OUTDECOMP= data set).				
TCS	plots the trend-cycle-seasonal component (OUTDECOMP= data set).				
TCC	plots the trend-cycle component (OUTDECOMP= data set).				
SIC	plots the seasonal-irregular component (OUTDECOMP= data set).				
SC	plots the seasonal component (OUTDECOMP= data set).				
SA	plots the seasonal adjusted component (OUTDECOMP= data set).				
PCSA	plots the percent change in the seasonal adjusted component (OUTDECOMP= data set).				
IC	plots the irregular component (OUTDECOMP= data set).				
TC	plots the trend component (OUTDECOMP= data set).				
CC	plots the cycle component (OUTDECOMP= data set).				
PERIODOGRAM< <i>option</i> >	plots the periodogram (OUTSPECTRA= data set). The available options for modifying the periodogram are <table> <tr> <td>MAXFREQ=<i>number</i></td><td>specifies the maximum frequency in radians to include in the plot</td></tr> <tr> <td>MINPERIOD=<i>number</i></td><td>specifies the minimum period to include in the plot</td></tr> </table>	MAXFREQ= <i>number</i>	specifies the maximum frequency in radians to include in the plot	MINPERIOD= <i>number</i>	specifies the minimum period to include in the plot
MAXFREQ= <i>number</i>	specifies the maximum frequency in radians to include in the plot				
MINPERIOD= <i>number</i>	specifies the minimum period to include in the plot				
SPECTRUM< <i>option</i> >	plots the spectral density estimate (OUTSPECTRA= data set). The available options for modifying the spectrum plot are <table> <tr> <td>MAXFREQ=<i>number</i></td><td>specifies the maximum frequency in radians to include in the plot</td></tr> <tr> <td>MINPERIOD=<i>number</i></td><td>specifies the minimum period to include in the plot</td></tr> </table>	MAXFREQ= <i>number</i>	specifies the maximum frequency in radians to include in the plot	MINPERIOD= <i>number</i>	specifies the minimum period to include in the plot
MAXFREQ= <i>number</i>	specifies the maximum frequency in radians to include in the plot				
MINPERIOD= <i>number</i>	specifies the minimum period to include in the plot				
SSA	plots the singular spectrum analysis results (OUTSSA= data set).				

ALL	same as PLOTS=(SERIES HISTOGRAM ACF PACF IACF WN SSA PERIODOGRAM SPECTRUM).
BASIC	same as PLOTS=(SERIES HISTOGRAM CYCLES CORR DECOMP)

For example, PLOTS=SERIES plots the time series. The PLOTS= option produces graphical output for these results by using the Output Delivery System (ODS). The PLOTS= option produces results similar to the data sets listed in parentheses next to the preceding options.

PRINT= *option* | (*options*)

specifies the printed output desired. By default, the TIMESERIES procedure produces no printed output. The following printing options are available:

DECOMP	prints the seasonal decomposition/adjustment table (OUTDECOMP= data set).
SEASONS	prints the seasonal statistics table (OUTSEASON= data set).
DESCSTATS	prints the descriptive statistics for the accumulated time series (OUTSUM= data set).
SUMMARY	prints the descriptive statistics table for all time series (OUTSUM= data set).
TRENDS	prints the trend statistics table (OUTTREND= data set).
SSA	prints the singular spectrum analysis results (OUTSSA= data set).
ALL	same as PRINT=(DESCSTATS SUMMARY).

For example, PRINT=SEASONS prints the seasonal statistics. The PRINT= option produces printed output for these results by using the Output Delivery System (ODS). The PRINT= option produces results similar to the data sets listed in parentheses next to the preceding options.

PRINTDETAILS

specifies that output requested with the PRINT= option be printed in greater detail.

SEASONALITY= *number*

specifies the length of the seasonal cycle. For example, SEASONALITY=3 means that every group of three time periods forms a seasonal cycle. By default, the length of the seasonal cycle is one (no seasonality) or the length implied by the INTERVAL= option specified in the ID statement. For example, INTERVAL=MONTH implies that the length of the seasonal cycle is 12.

SORTNAMES

specifies that the variables specified in the VAR and CROSSVAR statements be processed in sorted order by the variable names. This option allows the output data sets to be presorted by the variable names.

BY Statement

A BY statement can be used with PROC TIMESERIES to obtain separate dummy variable definitions for groups of observations defined by the BY variables.

When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data by using the SORT procedure with a similar BY statement.
- Specify the option NOTSORTED or DESCENDING in the BY statement for the TIMESERIES procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables by using the DATASETS procedure.

For more information about the BY statement, see *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

CORR Statement

CORR *statistics* < / *options* > ;

A CORR statement can be used with the TIMESERIES procedure to specify options related to time domain analysis of the accumulated time series. Only one CORR statement is allowed.

The following time domain statistics are available:

LAG	time lag
N	number of variance products
ACOV	autocovariances
ACF	autocorrelations
ACFSTD	autocorrelation standard errors
ACF2STD	an indicator of whether autocorrelations are less than (–1), greater than (1), or within (0) two standard errors of zero
ACFNORM	normalized autocorrelations
ACFPROB	autocorrelation probabilities
ACFLPROB	autocorrelation log probabilities
PACF	partial autocorrelations
PACFSTD	partial autocorrelation standard errors
PACF2STD	an indicator of whether partial autocorrelation are less than (–1), greater than (1), or within (0) two standard errors of zero
PACFNORM	partial normalized autocorrelations
PACFPROB	partial autocorrelation probabilities

PACFLPROB	partial autocorrelation log probabilities
IACF	inverse autocorrelations
IACFSTD	inverse autocorrelation standard errors
IACF2STD	an indicator of whether the inverse autocorrelation is less than (−1), greater than (1) or within (0) two standard errors of zero
IACFNORM	normalized inverse autocorrelations
IACFPROB	inverse autocorrelation probabilities
IACFLPROB	inverse autocorrelation log probabilities
WN	white noise test statistics
WNPROB	white noise test probabilities
WNLPROB	white noise test log probabilities

If none of the correlation statistics are specified, the default is as follows:

```
corr lag n acov acf acfstd pacf pacfstd iacf iacfstd wn wnprob;
```

The following options can be specified in the CORR statement following the slash (/):

NLAG= *number*

specifies the number of lags to be stored in the OUTCORR= data set or to be plotted. The default is 24 or three times the length of the seasonal cycle, whichever is smaller. The LAGS= option takes precedence over the NLAG= option.

LAGS= (*numlist*)

specifies the list of lags to be stored in OUTCORR= data set or to be plotted. The list of lags must be separated by spaces or commas. For example, LAGS=(1,3) specifies the first then third lag.

NPARMS= *number*

specifies the number of parameters used in the model that created the residual time series. The number of parameters determines the degrees of freedom associated with the Ljung-Box statistics. The default is NPARMS=0. This option is useful when analyzing the residuals of a time series model with the number of parameters specified by NPARMS=*number* option.

TRANSPPOSE= NO|YES

specifies which values are recorded as column names in the OUTCORR= data set. TRANSPPOSE=YES specifies that lags be recorded as the column names instead of correlation statistics as the column names. The TRANSPPOSE=NO option is useful for graphing the correlation results with SAS/GRAPH procedures. The TRANSPPOSE=YES option is useful for analyzing the correlation results with other SAS procedures such as the CLUSTER procedure of SAS/STAT or SAS Enterprise Miner software. The default is TRANSPPOSE=NO.

CROSSCORR Statement

CROSSCORR *statistics* < / *options* > ;

A CROSSCORR statement can be used with the TIMESERIES procedure to specify options that are related to cross-correlation analysis of the accumulated time series. Only one CROSSCORR statement is allowed.

The following time domain statistics are available:

LAG	time lag
N	number of variance products
CCOV	cross covariances
CCF	cross-correlations
CCFSTD	cross-correlation standard errors
CCF2STD	an indicator of whether cross-correlations are less than (−1), greater than (1), or within (0) two standard errors of zero
CCFNORM	normalized cross-correlations
CCFPROB	cross-correlation probabilities
CCFLPROB	cross-correlation log probabilities

If none of the cross-correlation statistics are specified, the default is as follows:

```
crosscorr lag n ccov ccf ccfstd;
```

The following options can be specified in the CROSSCORR statement following the slash (/):

NLAG= *number*

specifies the number of lags to be stored in the OUTCROSSCORR= data set or to be plotted. The default is 24 or three times the length of the seasonal cycle, whichever is smaller. The LAGS= option takes precedence over the NLAG= option.

LAGS=(*numlist*)

specifies a list of lags to be stored in OUTCROSSCORR= data set or to be plotted. The list of lags must be separated by spaces or commas. For example, LAGS=(1,3) specifies the first then third lag.

TRANSPPOSE= NO|YES

specifies which values are recorded as column names in the OUTCROSSCORR= data set. TRANSPPOSE=YES specifies that the lags be recorded as the column names instead of the cross-correlation statistics. The TRANSPPOSE=NO option is useful for graphing the cross-correlation results with SAS/GRAPH procedures. The TRANSPPOSE=YES option is useful for analyzing the cross-correlation results with other procedures such as the CLUSTER procedure of SAS/STAT or SAS Enterprise Miner software. The default is TRANSPPOSE=NO.

DECOMP Statement

DECOMP *components* < / *options* > ;

A DECOMP statement can be used with the TIMESERIES procedure to specify options related to classical seasonal decomposition of the time series data. Only one DECOMP statement is allowed. The options specified affect all variables listed in the VAR statements. Decomposition can be performed only when the length of the seasonal cycle specified by the PROC TIMESERIES statement SEASONALITY= option or implied by the ID statement INTERVAL= option is greater than one.

The following seasonal decomposition components are available:

ORIG ORIGINAL	original series
TCC TRENDCYCLE	trend-cycle component
SIC SEASONIRREGULAR	seasonal-irregular component
SC SEASONAL	seasonal component
SCSTD	seasonal component standard errors
TCS TRENDCYCLESEASON	trend-cycle-seasonal component
IC IRREGULAR	irregular component
SA ADJUSTED	seasonally adjusted series
PCSA	percent change seasonally adjusted series
TC	trend component
CC CYCLE	cycle component

If none of the components are specified, the default is as follows:

```
decomp orig tcc sc ic sa;
```

The following options can be specified in the DECOMP statement following the slash (/):

MODE= *option*

specifies the type of decomposition to be used to decompose the time series. The following values can be specified for the MODE= option:

ADD ADDITIVE	additive decomposition
MULT MULTIPLICATIVE	multiplicative decomposition
LOGADD LOGADDITIVE	log-additive decomposition
PSEUDOADD PSEUDOADDITIVE	pseudo-additive decomposition
MULTORADD	multiplicative or additive decomposition, depending on data

Multiplicative and log additive decomposition require strictly positive time series. If the accumulated time series contains nonpositive values and the `MODE=MULT` or `MODE=LOGADD` option is specified, an error results. Pseudo-additive decomposition requires a nonnegative-valued time series. If the accumulated time series contains negative values and the `MODE=PSEUDOADD` option is specified, an error results. The `MODE=MULTORADD` option specifies that multiplicative decomposition be used when the accumulated time series contains only positive values, that pseudo-additive decomposition be used when the accumulated time series contains only nonnegative values, and that additive decomposition be used otherwise. The default is `MODE=MULTORADD`.

LAMBDA= *number*

specifies the Hodrick-Prescott filter parameter for trend-cycle decomposition. The default is `LAMBDA=1600`. Filtering applies when the trend component or the cycle component is requested. If filtering is not specified, this option is ignored.

NPRIODS= *number*

specifies the number of time periods to be stored in the `OUTDECOMP=` data set when the `TRANSPPOSE=YES` option is specified. If the `TRANSPPOSE=NO` option is specified, the `NPRIODS=` option is ignored. If the `NPRIODS=` option is positive, the first or beginning time periods are recorded. If the `NPRIODS=` option is negative, the last or ending time periods are recorded. The `NPRIODS=` option specifies the number of `OUTDECOMP=` data set variables to contain the seasonal decomposition and is therefore limited to the maximum allowed number of SAS variables. If the number of time periods exceeds this limit, a warning is printed in the log and the number of periods stored is reduced to the limit.

If the `NPRIODS=` option is not specified, all of the periods specified between the `ID` statement `START=` and `END=` options are stored. If at least one of the `START=` or `END=` options is not specified, the default magnitude is the seasonality specified by the `SEASONALITY=` option in the `PROC TIMESERIES` statement or implied by the `INTERVAL=` option in the `ID` statement. If only the `START=` option or both the `START=` and `END=` options are specified and the seasonality is zero, the default is `NPRIODS=5`. If only the `END=` option or neither the `START=` nor `END=` option is specified and the seasonality is zero, the default is `NPRIODS=-5`.

TRANSPPOSE= `NO` | `YES`

specifies which values are recorded as column names in the `OUTDECOMP=` data set. `TRANSPPOSE=YES` specifies that the time periods be recorded as the column names instead of the statistics. The first and last time periods stored in the `OUTDECOMP=` data set correspond to the period of the `ID` statement `START=` option and `END=` option, respectively. If only the `ID` statement `END=` option is specified, the last time ID value of each accumulated time series corresponds to the last time period column. If only the `ID` statement `START=` option is specified, the first time ID value of each accumulated time series corresponds to the first time period column. If neither the `START=` option nor the `END=` option is specified with the `ID` statement, the first time ID value of each accumulated time series corresponds to the first time period column. The `TRANSPPOSE=NO` option is useful for analyzing or displaying the decomposition results with `SAS/GRAPH` procedures. The `TRANSPPOSE=YES` option is useful for analyzing the decomposition results with other SAS procedures or SAS Enterprise Miner software. The default is `TRANSPPOSE=NO`.

ID Statement

ID *variable* **INTERVAL=***interval* < *options* > ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable's values are assumed to be SAS date or datetime values. In addition, the ID statement specifies the (desired) frequency associated with the time series. The ID statement *options* also specify how the observations are accumulated and how the time ID values are aligned to form the time series. The information specified affects all variables listed in subsequent VAR statements. If the ID statement is specified, the INTERVAL= must also be used. If an ID statement is not specified, the observation number, with respect to the BY group, is used as the time ID.

The following *options* can be used with the ID statement:

ACCUMULATE= *option*

specifies how the data set observations are to be accumulated within each time period. The frequency (width of each time interval) is specified by the INTERVAL= option. The ID variable contains the time ID values. Each time ID variable value corresponds to a specific time period. The accumulated values form the time series, which is used in subsequent analysis.

The ACCUMULATE= option is useful when there are zero or more than one input observations that coincide with a particular time period (for example, time-stamped transactional data). The EXPAND procedure offers additional frequency conversions and transformations that can also be useful in creating a time series.

The following *options* determine how the observations are accumulated within each time period based on the ID variable and the frequency specified by the INTERVAL= option:

NONE	No accumulation occurs; the ID variable values must be equally spaced with respect to the frequency. This is the default option.
TOTAL	Observations are accumulated based on the total sum of their values.
AVERAGE AVG	Observations are accumulated based on the average of their values.
MINIMUM MIN	Observations are accumulated based on the minimum of their values.
MEDIAN MED	Observations are accumulated based on the median of their values.
MAXIMUM MAX	Observations are accumulated based on the maximum of their values.
N	Observations are accumulated based on the number of nonmissing observations.
NMISS	Observations are accumulated based on the number of missing observations.
NOBS	Observations are accumulated based on the number of observations.
FIRST	Observations are accumulated based on the first of their values.
LAST	Observations are accumulated based on the last of their values.
STDDEV STD	Observations are accumulated based on the standard deviation of their values.
CSS	Observations are accumulated based on the corrected sum of squares of their values.

USS Observations are accumulated based on the uncorrected sum of squares of their values.

If the **ACCUMULATE=** option is specified, the **SETMISSING=** option is useful for specifying how accumulated missing values are to be treated. If missing values should be interpreted as zero, then **SETMISSING=0** should be used. The section “[Details: TIMESERIES Procedure](#)” on page 2048 describes accumulation in greater detail.

ALIGN= *option*

controls the alignment of SAS dates used to identify output observations. The **ALIGN=** option accepts the following values: **BEGINNING** | **BEG** | **B**, **MIDDLE** | **MID** | **M**, and **ENDING** | **END** | **E**. **BEGINNING** is the default.

BOUNDARYALIGN= *option*

controls how the **ACCUMULATE=** option is processed for the two boundary time intervals, which include the **START=** and **END=** time ID values. Some time ID values might fall inside the first and last accumulation intervals but fall outside the **START=** and **END=** boundaries. In these cases the **BOUNDARYALIGN=** option determines which values to include in the accumulation operation. You can specify the following *options*:

NONE	No values outside the START= and END= boundaries are accumulated.
START	All observations in the first time interval are accumulated.
END	All observations in the last time interval are accumulated.
BOTH	All observations in the first and last are accumulated.

If no option is specified, the default value **BOUNDARYALIGN=NONE** is used. The section “[Details: TIMESERIES Procedure](#)” on page 2048 describes the **BOUNDARYALIGN=** accumulation option in greater detail.

END= *option*

specifies a SAS date or datetime value that represents the end of the data. If the last time ID variable value is less than the **END=** value, the series is extended with missing values. If the last time ID variable value is greater than the **END=** value, the series is truncated. For example, **END=&sysdate** uses the automatic macro variable **SYSDATE** to extend or truncate the series to the current date. The **START=** and **END=** options can be used to ensure that data associated within each **BY** group contains the same number of observations.

FORMAT= *format*

specifies the SAS format for the time ID values. If the **FORMAT=** option is not specified, the default format is implied from the **INTERVAL=** option.

INTERVAL= *interval*

specifies the frequency of the accumulated time series. For example, if the input data set consists of quarterly observations, then **INTERVAL=QTR** should be used. If the **PROC TIMESERIES** statement **SEASONALITY=** option is not specified, the length of the seasonal cycle is implied from the **INTERVAL=** option. For example, **INTERVAL=QTR** implies a seasonal cycle of length 4. If the **ACCUMULATE=** option is also specified, the **INTERVAL=** option determines the time periods for the accumulation of observations. The **INTERVAL=** option is required and must be the first option specified in the ID statement.

NOTSORTED

specifies that the time ID values not be in sorted order. The TIMESERIES procedure sorts the data with respect to the time ID prior to analysis.

SETMISSING= *option* | *number*

specifies how missing values (either actual or accumulated) are to be interpreted in the accumulated time series. If a number is specified, missing values are set to the number. If a missing value indicates an unknown value, this option should not be used. If a missing value indicates no value, SETMISSING=0 should be used. You would typically use SETMISSING=0 for transactional data because no recorded data usually implies no activity. The following options can also be used to determine how missing values are assigned:

MISSING	Missing values are set to missing. This is the default option.
AVERAGE AVG	Missing values are set to the accumulated average value.
MINIMUM MIN	Missing values are set to the accumulated minimum value.
MEDIAN MED	Missing values are set to the accumulated median value.
MAXIMUM MAX	Missing values are set to the accumulated maximum value.
FIRST	Missing values are set to the accumulated first nonmissing value.
LAST	Missing values are set to the accumulated last nonmissing value.
PREVIOUS PREV	Missing values are set to the previous period's accumulated nonmissing value. Missing values at the beginning of the accumulated series remain missing.
NEXT	Missing values are set to the next period's accumulated nonmissing value. Missing values at the end of the accumulated series remain missing.

START= *option*

specifies a SAS date or datetime value that represents the beginning of the data. If the first time ID variable value is greater than the START= value, the series is prepended with missing values. If the first time ID variable value is less than the START= value, the series is truncated. The START= and END= options can be used to ensure that data associated with each by group contains the same number of observations.

SEASON Statement

SEASON *statistics* < / *options* > ;

A SEASON statement can be used with the TIMESERIES procedure to specify options that are related to seasonal analysis of the time-stamped transactional data. Only one SEASON statement is allowed. The options specified affect all variables specified in the VAR statements. Seasonal analysis can be performed only when the length of the seasonal cycle specified by the PROC TIMESERIES statement SEASONALITY= option or implied by the ID statement INTERVAL= option is greater than one.

The following seasonal statistics are available:

NOBS	number of observations
N	number of nonmissing observations
NMISS	number of missing observations
MINIMUM	minimum value
MAXIMUM	maximum value
RANGE	range value
SUM	summation value
MEAN	mean value
STDDEV	standard deviation
CSS	corrected sum of squares
USS	uncorrected sum of squares
MEDIAN	median value

If none of the season statistics are specified, the default is as follows:

```
season n min max mean std;
```

The following option can be specified in the SEASON statement following the slash (/):

TRANSPOSE= NO | YES

specifies which values are recorded as column names in the OUTSEASON= data set. TRANSPOSE=YES specifies that the seasonal indices be recorded as the column names instead of the statistics. The TRANSPOSE=NO option is useful for graphing the seasonal analysis results with SAS/GRAPH procedures. The TRANSPOSE=YES option is useful for analyzing the seasonal analysis results with SAS procedures or SAS Enterprise Miner software. The default is TRANSPOSE=NO.

SPECTRA Statement

```
SPECTRA statistics < / options > ;
```

A SPECTRA statement can be used with the TIMESERIES procedure to specify which statistics appear in the OUTSPECTRA= data set. The SPECTRA statement *options* are used in performing a spectral analysis on the variables listed in the VAR statement. These *options* affect values that are produced in the PROC TIMESERIES statement's OUTSPECTRA= data set, and in the periodogram and spectral density estimate. Only one SPECTRA statement is allowed.

The following univariate frequency domain statistics are available:

FREQ	frequency in radians from 0 to π
PERIOD	period or wavelength
COS	cosine transform

SIN	sine transform
P	periodogram
S	spectral density estimates

If none of the frequency domain statistics are specified, the default is as follows:

```
spectra period p;
```

The following *options* can be specified in the SPECTRA statement following the slash (/):

ADJUSTMEAN | CENTER= NO | YES

specifies whether or not the series should be adjusted by its mean prior to performing the Fourier decomposition. This sets the first periodogram ordinate to 0 rather than to $2n$ times the squared mean. This option is commonly used when the periodograms are to be plotted to prevent a large first periodogram ordinate from distorting the scale of the plot. ADJUSTMEAN=YES specifies the series should be transformed by subtracting its mean. ADJUSTMEAN=NO specifies no adjustment of the series should be performed. The default is ADJUSTMEAN=NO.

ALPHA= num

specifies the width of a window drawn around the spectral density estimate in a spectral density versus frequency plot. Based on approximations proposed by Brockwell and Davis (1991), periodogram ordinates fall within this window with a confidence level of $1 - \text{ALPHA}$. The value ALPHA must be between 0 and 1; the default is 0.5.

kernel **DOMAIN=domain C=c EXP|EXPON=e**

specifies the smoothing function used to calculate a spectral density estimate as the moving average of periodogram ordinates. The kernel function is an alternative way to using the WEIGHTS option as a smoothing function. The available *kernel* values are:

PARZEN	Parzen kernel
BARTLETT	Bartlett kernel
TUKEY	Tukey-Hanning kernel
TRUNC TRUNCAT	truncated kernel
QS QUADR	quadratic spectral kernel

The DOMAIN= option specifies how the smoothing function is interpreted. The available *domain* values are:

FREQUENCY	smooths the periodogram ordinates.
TIME	applies the kernel as a filter to the time series autocovariance function

By default DOMAIN=FREQUENCY, and smoothing is applied in the same manner as weights are applied when the WEIGHTS= option is used. Each of the kernel functions can be further parameterized with a kernel scale factor by using the C= and EXPON= options. A summary of the default values of the kernel scale parameters, c and e , that are associated with each of the kernel functions together with their kernel scale factor values, M , for a series with 100 periodogram ordinates is listed in [Table 32.2](#).

Table 32.2 Default Kernel Scale Factor Parameters

Kernel	c	e	M
Bartlett	1/2	1/3	2.32
Parzen	1	1/5	2.51
Quadratic	1/2	1/5	1.26
Tukey-Hanning	2/3	1/5	1.67
Truncated	1/4	1/5	0.63

For example, to apply the truncated kernel by using default scale factor parameters in the frequency domain, the following SPECTRA statement could be used:

```
spectra / truncat;
```

Details of the kernel function parameterization and the DOMAIN= option are provided in the section “[Using Kernel Specifications](#)” on page 2059.

WEIGHTS *numlist*

specifies the relative weights used in computing a spectral density estimate as the moving average smoothing of periodogram ordinates. If neither a WEIGHTS option nor a kernel function is specified, the spectral density estimate is identical to the unmodified periodogram. The following SPECTRA statement uses the WEIGHTS option to specify equal weighting for each of the three adjacent periodogram ordinates centered on each spectral density estimate:

```
spectra / weights 1 1 1;
```

Further description of how the weights are applied is provided in the section “[Using Specification of Weight Constants](#)” on page 2060.

SSA Statement

SSA < / *options* > ;

An SSA statement can be used with the TIMESERIES procedure to specify *options* that are related to singular spectrum analysis (SSA) of the accumulated time series. Only one SSA statement is allowed.

The following *options* can be specified in the SSA statement following the slash (/).

ADJUSTMEAN | CENTER= NO | YES

specifies whether or not the series should be adjusted by its mean prior to performing the singular spectrum analysis. ADJUSTMEAN=YES specifies the series should be transformed by subtracting its mean. ADJUSTMEAN=NO specifies no adjustment of the series should be performed. The default is ADJUSTMEAN=NO.

GROUPS= (numlist)...(numlist)

specifies the lists that categorize window lags into groups. The window lags must be separated by spaces or commas. For example, GROUPS=(1,3) (2,4) specifies that the first and third window lags form the first group and the second and fourth window lags form the second group. If no GROUPS= option is specified, the window lags are divided into two groups based on the THRESHOLDPCT= value.

For example, the following SSA statement specifies three groups:

```
ssa / groups=(1 3) (2 4 5) (6);
```

The first group contains the first and third principal components; the second group contains the second, fourth, and fifth principal components; and the third group contains the sixth principal component.

By default, the first group contains the principal components whose contributions to the series sum to greater than the THRESHOLDPCT= value of 90%, and the second group contains the remaining components.

LENGTH = number

specifies the window length to be used in the analysis. It represents the maximum lag used in the SSA autocovariance calculations. The number specified by the LENGTH= option must be greater than one and less than 1000. When the SEASONALITY= option is provided or inferred by the INTERVAL= option in the ID statement the default window length is the smaller of two times the length of the seasonal cycle and one half the length of the time series. When no seasonality value is available the default window length is the smaller of 12 and one half the length of the time series.

For example, the following SSA statement specifies a window length of 10:

```
ssa / length=10;
```

If no window length option is specified and the INTERVAL=MONTH or SEASONALITY=12 options are specified, a window length of 24 is used. If the specified window length is greater than one-half the length of the accumulated time series, the window length is reduced and a warning message is printed to the log.

NPERIODS= number

specifies the number of time periods to be stored in the OUTSSA= data set when the TRANSPPOSE=YES option is specified. If the TRANSPPOSE option is not specified, the NPERIODS= option is ignored. The NPERIODS= option specifies the number of OUTSSA= data set variables to contain the groups.

If the NPERIODS= option is not specified, all of the periods specified between the ID statement START= and END= options are stored. If at least one of the START= or END= options is not specified, the default magnitude is the seasonality specified by the SEASONALITY= option in the PROC TIMESERIES statement or implied by the INTERVAL= option in the ID statement. If only the START= option or both the START= and END= options are specified and the seasonality is zero, the default is NPERIODS=5. If only the END= option or neither the START= nor END= option is specified and the seasonality is zero, the default is NPERIODS=-5.

THRESHOLDPCT= *percent*

specifies a percentage used to divide the SSA components into two groups based on the cumulative percentage of their singular values. The percentage specified by the THRESHOLDPCT= option must be greater than zero and less than 100. The default is THRESHOLDPCT=90.

For example, the following SSA statement specifies 80%:

```
ssa / THRESHOLDPCT=80;
```

The size of the second group must be at least one, and it must be less than the window length. The percentage is adjusted to achieve this requirement.

For example, the following SSA statement specifies a THRESHOLDPCT= of 0%, which effectively sets the size of the second group to one less than the window length:

```
ssa / THRESHOLDPCT = 0;
```

The following SSA statement specifies a THRESHOLDPCT= of 100%, which implies that the size of the last group is one:

```
ssa / THRESHOLDPCT= 100;
```

TRANSPOSE= NO | YES

specifies which values are recorded as column names in the OUTSSA= data set. TRANSPOSE=YES specifies that the time periods be recorded as the column names instead of the specified groups as the column names. The first and last time period stored in the OUTSSA= data set corresponds to the period of the ID statement START= and END= options, respectively. If only the ID statement END= option is specified, the last time ID value of each accumulated time series corresponds to the last time period column. If only the ID statement START= option is specified, the first time ID value of each accumulated time series corresponds to the first time period column. If neither the START= option nor the END= option is specified with the ID statement, the first time ID value of each accumulated time series corresponds to the first time period column. The TRANSPOSE=NO option is useful for displaying the SSA results. The TRANSPOSE=YES option is useful for analyzing the SSA results using SAS Enterprise Miner software. The default is TRANSPOSE=NO.

TREND Statement

TREND *statistics* < / *options* > ;

A TREND statement can be used with the TIMESERIES procedure to specify options related to trend analysis of the time-stamped transactional data. Only one TREND statement is allowed. The options specified affect all variables specified in the VAR statements.

The following trend statistics are available:

NOBS number of observations

N	number of nonmissing observations
NMISS	number of missing observations
MINIMUM	minimum value
MAXIMUM	maximum value
RANGE	range value
SUM	summation value
MEAN	mean value
STDDEV	standard deviation
CSS	corrected sum of squares
USS	uncorrected sum of squares
MEDIAN	median value

If none of the trend statistics are specified, the default is as follows:

```
trend n min max mean std;
```

The following options can be specified in the TREND statement following the slash (/):

NPERIODS= *number*

specifies the number of time periods to be stored in the OUTTREND= data set when the TRANSPOSE=YES option is specified. If the TRANSPOSE option is not specified, the NPERIODS= option is ignored. The NPERIODS= option specifies the number of OUTTREND= data set variables to contain the trend statistics and is therefore limited to the maximum allowed number of SAS variables.

If the NPERIODS= option is not specified, all of the periods specified between the ID statement START= and END= options are stored. If at least one of the START= or END= options is not specified, the default magnitude is the seasonality specified by the SEASONALITY= option in the PROC TIMESERIES statement or implied by the INTERVAL= option in the ID statement. If only the START= option or both the START= and END= options are specified and the seasonality is zero, the default is NPERIODS=5. If only the END= option or neither the START= nor END= option is specified and the seasonality is zero, the default is NPERIODS=-5.

TRANSPOSE= NO | YES

specifies which values are recorded as column names in the OUTTREND= data set. TRANSPOSE=YES specifies that the time periods be recorded as the column names instead of the statistics as the column names. The first and last time periods stored in the OUTTREND= data set correspond to the period of the ID statement START= and END= options, respectively. If only the ID statement END= option is specified, the last time ID value of each accumulated time series corresponds to the last time period column. If only the ID statement START= option is specified, the first time ID value of each accumulated time series corresponds to the first time period column. If neither the START= option nor the END= option is specified with the ID statement, the first time ID value of each accumulated time series corresponds to the first time period column. The TRANSPOSE=NO option is useful for analyzing or displaying the trend analysis results with SAS/GRAPH procedures. The TRANSPOSE=YES option is useful for analyzing the trend analysis results with other SAS procedures or SAS Enterprise Miner software. The default is TRANSPOSE=NO.

VAR and CROSSVAR Statements

VAR *variable-list* < / *options* > ;

CROSSVAR *variable-list* < / *options* > ;

The VAR and CROSSVAR statements list the numeric variables in the DATA= data set whose values are to be accumulated to form the time series.

An input data set variable can be specified in only one VAR or CROSSVAR statement. Any number of VAR and CROSSVAR statements can be used. The following options can be used with the VAR and CROSSVAR statements:

ACCUMULATE= *option*

specifies how the data set observations are to be accumulated within each time period for the variables listed in the VAR or CROSSVAR statement. If the ACCUMULATE= option is not specified in the VAR or CROSSVAR statement, accumulation is determined by the ACCUMULATE= option of the ID statement. See the ID statement ACCUMULATE= option for more details.

DIF=(*numlist*)

specifies the differencing to be applied to the accumulated time series. The list of differencing orders must be separated by spaces or commas. For example, DIF=(1,3) specifies first then third order differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the DIF= option.

SDIF=(*numlist*)

specifies the seasonal differencing to be applied to the accumulated time series. The list of seasonal differencing orders must be separated by spaces or commas. For example, SDIF=(1,3) specifies first then third order seasonal differencing. Differencing is applied after time series transformation. The TRANSFORM= option is applied before the SDIF= option.

SETMISS= *option* | *number*

SETMISSING= *option* | *number*

specifies how missing values (either actual or accumulated) are to be interpreted in the accumulated time series for variables listed in the VAR or CROSSVAR statement. If the SETMISSING= option is not specified in the VAR or CROSSVAR statement, missing values are set based on the SETMISSING= option of the ID statement. See the ID statement SETMISSING= option for more details.

TRANSFORM= *option*

specifies the time series transformation to be applied to the accumulated time series. The following transformations are provided:

NONE	No transformation is applied. This option is the default.
LOG	logarithmic transformation
SQRT	square-root transformation
LOGISTIC	logistic transformation

BOXCOX(*n*) Box-Cox transformation with parameter number where the number is between -5 and 5

When the TRANSFORM= option is specified, the time series must be strictly positive.

Details: TIMESERIES Procedure

The TIMESERIES procedure can be used to perform trend and seasonal analysis on transactional data. For trend analysis, various sample statistics are computed for each time period defined by the time ID variable and INTERVAL= option. For seasonal analysis, various sample statistics are computed for each season defined by the INTERVAL= or the SEASONALITY= option. For example, if the transactional data ranges from June 1990 to January 2000 and the data are to be accumulated on a monthly basis, then the trend statistics are computed for every month: June 1990, July 1990, ..., January 2000. The seasonal statistics are computed for each season: January, February, ..., December.

The TIMESERIES procedure can be used to form time series data from transactional data. The accumulated time series can then be analyzed using time series techniques. The data is analyzed in the following order:

- | | |
|---------------------------------|--|
| 1. accumulation | ACCUMULATE= option in the ID, VAR, or CROSSVAR statement |
| 2. missing value interpretation | SETMISSING= option in the ID, VAR, or CROSSVAR statement |
| 3. time series transformation | TRANSFORM= option in the VAR or CROSSVAR statement |
| 4. time series differencing | DIF= and SDIF= options in the VAR or CROSSVAR statement |
| 5. descriptive statistics | OUTSUM= option and the PRINT=DESCSTATS option |
| 6. seasonal decomposition | DECOMP statement or the OUTDECOMP= option in the PROC TIMESERIES statement |
| 7. correlation analysis | CORR statement or the OUTCORR= option in the PROC TIMESERIES statement |
| 8. singular spectrum analysis | SSA statement or the OUTSSA= option in the PROC TIMESERIES statement |
| 9. Fourier spectral analysis | SPECTRA statement or the OUTSPECTRA= option in the PROC TIMESERIES statement |
| 10. cross-correlation analysis | CROSSCORR statement or the OUTCROSSCORR= option in the PROC TIMESERIES statement |

Accumulation

If the `ACCUMULATE=` option in the `ID`, `VAR`, or `CROSSVAR` statement is specified, data set observations are accumulated within each time period. The frequency (width of each time interval) is specified by the `INTERVAL=` option. The `ID` variable contains the time `ID` values. Each time `ID` value corresponds to a specific time period. Accumulation is useful when the input data set contains transactional data, whose observations are not spaced with respect to any particular time interval. The accumulated values form the time series, which is used in subsequent analyses.

For example, suppose a data set contains the following observations:

19MAR1999	10
19MAR1999	30
11MAY1999	50
12MAY1999	20
23MAY1999	20

If the `INTERVAL=MONTH` is specified, all of the above observations fall within a three-month period of time between March 1999 and May 1999. The observations are accumulated within each time period as follows:

If the `ACCUMULATE=NONE` option is specified, an error is generated because the `ID` variable values are not equally spaced with respect to the specified frequency (`MONTH`).

If the `ACCUMULATE=TOTAL` option is specified, the resulting time series is:

01MAR1999	40
01APR1999	.
01MAY1999	90

If the `ACCUMULATE=AVERAGE` option is specified, the resulting time series is:

01MAR1999	20
01APR1999	.
01MAY1999	30

If the `ACCUMULATE=MINIMUM` option is specified, the resulting time series is:

01MAR1999	10
01APR1999	.
01MAY1999	20

If the `ACCUMULATE=MEDIAN` option is specified, the resulting time series is:

01MAR1999	20
01APR1999	.
01MAY1999	20

If the ACCUMULATE=MAXIMUM option is specified, the resulting time series is:

```
01MAR1999    30
01APR1999    .
01MAY1999    50
```

If the ACCUMULATE=FIRST option is specified, the resulting time series is:

```
01MAR1999    10
01APR1999    .
01MAY1999    50
```

If the ACCUMULATE=LAST option is specified, the resulting time series is:

```
01MAR1999    30
01APR1999    .
01MAY1999    20
```

If the ACCUMULATE=STDDEV option is specified, the resulting time series is:

```
01MAR1999    14.14
01APR1999    .
01MAY1999    17.32
```

As can be seen from the above examples, even though the data set observations contain no missing values, the accumulated time series can have missing values.

Boundary Alignment

When the BOUNDARYALIGN= option is used to qualify the START= or END= options, additional time series values can be incorporated into the accumulation operation. For instance, if a data set contains the following observations

```
01JAN1999    10
01FEB1999    10
01MAR1999    10
01APR1999    10
01MAY1999    10
01JUN1999    10
```

and the options START='/01FEB1999'd, END='/01APR1999'd, INTERVAL=QUARTER, and ACCUMULATE=TOTAL are specified, using the BOUNDARYALIGN= option results in the following accumulated time series:

If BOUNDARYALIGN=START is specified, the accumulated time series is

```
01JAN1999  30
01APR1999  10
```

If BOUNDARYALIGN=END is specified, the accumulated time series is

```
01JAN1999  20
01APR1999  30
```

If BOUNDARYALIGN=BOTH is specified, the accumulated time series is

```
01JAN1999  30
01APR1999  30
```

If BOUNDARYALIGN=NONE is specified, the accumulated time series is

```
01JAN1999  20
01APR1999  10
```

Missing Value Interpretation

Sometimes missing values should be interpreted as unknown values. But sometimes missing values are known, such as when missing values are created from accumulation and no observations should be interpreted as no value—that is, zero. In the former case, the SETMISSING= option can be used to interpret how missing values are treated. The SETMISSING=0 option should be used when missing observations are to be treated as no (zero) values. In other cases, missing values should be interpreted as global values, such as minimum or maximum values of the accumulated series. The accumulated and interpreted time series is used in subsequent analyses.

Time Series Transformation

There are four transformations available for strictly positive series only. Let $y_t > 0$ be the original time series, and let w_t be the transformed series. The transformations are defined as follows:

Log is the logarithmic transformation.

$$w_t = \ln(y_t)$$

Logistic is the logistic transformation.

$$w_t = \ln(cy_t/(1 - cy_t))$$

where the scaling factor c is

$$c = (1 - 10^{-6})10^{-\text{ceil}(\log_{10}(\max(y_t)))}$$

and $\text{ceil}(x)$ is the smallest integer greater than or equal to x .

Square root is the square root transformation.

$$w_t = \sqrt{y_t}$$

Box Cox is the Box-Cox transformation.

$$w_t = \begin{cases} \frac{y_t^\lambda - 1}{\lambda}, & \lambda \neq 0 \\ \ln(y_t), & \lambda = 0 \end{cases}$$

More complex time series transformations can be performed by using the EXPAND procedure of SAS/ETS.

Time Series Differencing

After optionally transforming the series, the accumulated series can be simply or seasonally differenced by using the VAR and CROSSVAR statement DIF= and SDIF= options. For example, suppose y_t is a monthly time series. The following examples of the DIF= and SDIF= options demonstrate how to simply and seasonally difference the time series.

```
dif=(1) sdif=(1)
dif=(1,12)
```

Additionally, when y_t is strictly positive and the TRANSFORM=, DIF=, and SDIF= options are combined in the VAR and CROSSVAR statements, the transformation operation is performed before the differencing operations.

Descriptive Statistics

Descriptive statistics can be computed from the working series by specifying the OUTSUM= option or PRINT=DESCSTATS.

Seasonal Decomposition

Seasonal decomposition/analysis can be performed on the working series by specifying the OUTDECOMP= option, the PRINT=DECOMP option, or one of the PLOTS= options associated with decomposition in the PROC TIMESERIES statement. The DECOMP statement enables you to specify options related to decomposition. The TIMESERIES procedure uses classical decomposition. More complex seasonal decomposition/adjustment analysis can be performed by using the X11 or the X12 procedure of SAS/ETS.

The DECOMP statement MODE= option determines the mode of the seasonal adjustment decomposition to be performed. There are four modes: multiplicative (MODE=MULT), additive (MODE=ADD),

pseudo-additive (MODE=PSEUDOADD), and log-additive (MODE=LOGADD) decomposition. The default is MODE=MULTORADD which specifies MODE=MULT for series that are strictly positive, MODE=PSEUDOADD for series that are nonnegative, and MODE=ADD for series that are not nonnegative.

When MODE=LOGADD is specified, the components are exponentiated to the original metric.

The DECOMP statement LAMBDA= option specifies the Hodrick-Prescott filter parameter (Hodrick and Prescott 1980). The default is LAMBDA=1600. The Hodrick-Prescott filter is used to decompose the trend-cycle component into the trend component and cycle component in an additive fashion. A smaller parameter assigns less significance to the cycle; that is, LAMBDA=0 implies no cycle component.

The notation and keywords associated with seasonal decomposition/adjustment analysis are defined in [Table 32.3](#).

Table 32.3 Seasonal Adjustment Formulas

Component	Keyword	MODE= Option	Formula
original series	ORIGINAL	MULT	$O_t = TC_t S_t I_t$
		ADD	$O_t = TC_t + S_t + I_t$
		LOGADD	$\log(O_t) = TC_t + S_t + I_t$
		PSEUDOADD	$O_t = TC_t(S_t + I_t - 1)$
trend-cycle component	TCC	MULT	centered moving average of O_t
		ADD	centered moving average of O_t
		LOGADD	centered moving average of $\log(O_t)$
		PSEUDOADD	centered moving average of O_t
seasonal-irregular component	SIC	MULT	$SI_t = S_t I_t = O_t / TC_t$
		ADD	$SI_t = S_t + I_t = O_t - TC_t$
		LOGADD	$SI_t = S_t + I_t = \log(O_t) - TC_t$
		PSEUDOADD	$SI_t = S_t + I_t - 1 = O_t / TC_t$
seasonal component	SC	MULT	seasonal Averages of SI_t
		ADD	seasonal Averages of SI_t
		LOGADD	seasonal Averages of SI_t
		PSEUDOADD	seasonal Averages of SI_t
irregular component	IC	MULT	$I_t = SI_t / S_t$
		ADD	$I_t = SI_t - S_t$
		LOGADD	$I_t = SI_t - S_t$
		PSEUDOADD	$I_t = SI_t - S_t + 1$
trend-cycle-seasonal component	TCS	MULT	$TCS_t = TC_t S_t = O_t / I_t$
		ADD	$TCS_t = TC_t + S_t = O_t - I_t$
		LOGADD	$TCS_t = TC_t + S_t = O_t - I_t$
		PSEUDOADD	$TCS_t = TC_t S_t$
trend component	TC	MULT	$T_t = TC_t - C_t$
		ADD	$T_t = TC_t - C_t$
		LOGADD	$T_t = TC_t - C_t$
		PSEUDOADD	$T_t = TC_t - C_t$
cycle component	CC	MULT	$C_t = TC_t - T_t$
		ADD	$C_t = TC_t - T_t$
		LOGADD	$C_t = TC_t - T_t$
		PSEUDOADD	$C_t = TC_t - T_t$
seasonally adjusted series	SA	MULT	$SA_t = O_t / S_t = TC_t I_t$
		ADD	$SA_t = O_t - S_t = TC_t + I_t$
		LOGADD	$SA_t = O_t / \exp(S_t) = \exp(TC_t + I_t)$
		PSEUDOADD	$SA_t = TC_t I_t$

The trend-cycle component is computed from the s -period centered moving average as follows:

$$TC_t = \sum_{k=-\lfloor s/2 \rfloor}^{\lfloor s/2 \rfloor} y_{t+k}/s$$

The seasonal component is obtained by averaging the seasonal-irregular component for each season.

$$S_{k+js} = \sum_{t=k \bmod s} \frac{SI_t}{T/s}$$

where $0 \leq j \leq T/s$ and $1 \leq k \leq s$. The seasonal components are normalized to sum to one (multiplicative) or zero (additive).

Correlation Analysis

Correlation analysis can be performed on the working series by specifying the OUTCORR= option or one of the PLOTS= options that are associated with correlation. The CORR statement enables you to specify options that are related to correlation analysis.

Autocovariance Statistics

LAGS	$h \in \{0, \dots, H\}$
N	N_h is the number of observed products at lag h , ignoring missing values
ACOV	$\hat{\gamma}(h) = \frac{1}{T} \sum_{t=h+1}^T (y_t - \bar{y})(y_{t-h} - \bar{y})$
ACOV	$\hat{\gamma}(h) = \frac{1}{N_h} \sum_{t=h+1}^T (y_t - \bar{y})(y_{t-h} - \bar{y})$ when embedded missing values are present

Autocorrelation Statistics

ACF	$\hat{\rho}(h) = \hat{\gamma}(h)/\hat{\gamma}(0)$
ACFSTD	$Std(\hat{\rho}(h)) = \sqrt{\frac{1}{T} \left(1 + 2 \sum_{j=1}^{h-1} \hat{\rho}(j)^2 \right)}$
ACFNORM	$Norm(\hat{\rho}(h)) = \hat{\rho}(h)/Std(\hat{\rho}(h))$
ACFPROB	$Prob(\hat{\rho}(h)) = 2(1 - \Phi(Norm(\hat{\rho}(h))))$
ACFLPROB	$LogProb(\hat{\rho}(h)) = -\log_{10}(Prob(\hat{\rho}(h)))$
ACF2STD	$Flag(\hat{\rho}(h)) = \begin{cases} 1 & \hat{\rho}(h) > 2Std(\hat{\rho}(h)) \\ 0 & -2Std(\hat{\rho}(h)) < \hat{\rho}(h) < 2Std(\hat{\rho}(h)) \\ -1 & \hat{\rho}(h) < -2Std(\hat{\rho}(h)) \end{cases}$

Partial Autocorrelation Statistics

PACF	$\hat{\phi}(h) = \Gamma_{(0,h-1)}\{\gamma_j\}_{j=1}^h$
PACFSTD	$Std(\hat{\phi}(h)) = 1/\sqrt{N_0}$
PCFNORM	$Norm(\hat{\phi}(h)) = \hat{\phi}(h)/Std(\hat{\phi}(h))$
PACFPROB	$Prob(\hat{\phi}(h)) = 2(1 - \Phi(Norm(\hat{\phi}(h))))$
PACFLPROB	$LogProb(\hat{\phi}(h)) = -\log_{10}(Prob(\hat{\phi}(h)))$

$$\text{PACF2STD} \quad \text{Flag}(\hat{\varphi}(h)) = \begin{cases} 1 & \hat{\varphi}(h) > 2\text{Std}(\hat{\varphi}(h)) \\ 0 & -2\text{Std}(\hat{\varphi}(h)) < \hat{\varphi}(h) < 2\text{Std}(\hat{\varphi}(h)) \\ -1 & \hat{\varphi}(h) < -2\text{Std}(\hat{\varphi}(h)) \end{cases}$$

Inverse Autocorrelation Statistics

$$\begin{aligned} \text{IACF} & \quad \hat{\theta}(h) \\ \text{IACFSTD} & \quad \text{Std}(\hat{\theta}(h)) = 1/\sqrt{N_0} \\ \text{IACFNORM} & \quad \text{Norm}(\hat{\theta}(h)) = \hat{\theta}(h)/\text{Std}(\hat{\theta}(h)) \\ \text{IACFPROB} & \quad \text{Prob}(\hat{\theta}(h)) = 2 \left(1 - \Phi(|\text{Norm}(\hat{\theta}(h))|) \right) \\ \text{IACFLPROB} & \quad \text{LogProb}(\hat{\theta}(h)) = -\log_{10}(\text{Prob}(\hat{\theta}(h))) \\ \text{IACF2STD} & \quad \text{Flag}(\hat{\theta}(h)) = \begin{cases} 1 & \hat{\theta}(h) > 2\text{Std}(\hat{\theta}(h)) \\ 0 & -2\text{Std}(\hat{\theta}(h)) < \hat{\theta}(h) < 2\text{Std}(\hat{\theta}(h)) \\ -1 & \hat{\theta}(h) < -2\text{Std}(\hat{\theta}(h)) \end{cases} \end{aligned}$$

White Noise Statistics

$$\begin{aligned} \text{WN} & \quad Q(h) = T(T+2) \sum_{j=1}^h \rho(j)^2 / (T-j) \\ \text{WN} & \quad Q(h) = \sum_{j=1}^h N_j \rho(j)^2 \text{ when embedded missing values are present} \\ \text{WNPROB} & \quad \text{Prob}(Q(h)) = \chi_{\max(1, h-p)}(Q(h)) \\ \text{WNLPROB} & \quad \text{LogProb}(Q(h)) = -\log_{10}(\text{Prob}(Q(h))) \end{aligned}$$

Cross-Correlation Analysis

Cross-correlation analysis can be performed on the working series by specifying the OUTCROSSCORR= option or one of the CROSSPLOTS= options that are associated with cross-correlation. The CROSSCORR statement enables you to specify options that are related to cross-correlation analysis.

Cross-Correlation Statistics

The cross-correlation statistics for the variable x supplied in a VAR statement and variable y supplied in a CROSSVAR statement are:

$$\begin{aligned} \text{LAGS} & \quad h \in \{0, \dots, H\} \\ \text{N} & \quad N_h \text{ is the number of observed products at lag } h, \text{ ignoring missing values} \\ \text{CCOV} & \quad \hat{\gamma}_{x,y}(h) = \frac{1}{T} \sum_{t=h+1}^T (x_t - \bar{x})(y_{t-h} - \bar{y}) \\ \text{CCOV} & \quad \hat{\gamma}_{x,y}(h) = \frac{1}{N_h} \sum_{t=h+1}^T (x_t - \bar{x})(y_{t-h} - \bar{y}) \text{ when embedded missing values are present} \\ \text{CCF} & \quad \hat{\rho}_{x,y}(h) = \hat{\gamma}_{x,y}(h) / \sqrt{\hat{\gamma}_x(0)\hat{\gamma}_y(0)} \end{aligned}$$

CCFSTD	$Std(\hat{\rho}_{x,y}(h)) = 1/\sqrt{N_0}$
CCFNORM	$Norm(\hat{\rho}_{x,y}(h)) = \hat{\rho}_{x,y}(h)/Std(\hat{\rho}_{x,y}(h))$
CCFPROB	$Prob(\hat{\rho}_{x,y}(h)) = 2(1 - \Phi(Norm(\hat{\rho}_{x,y}(h))))$
CCFLPROB	$LogProb(\hat{\rho}_{x,y}(h)) = -\log_{10}(Prob(\hat{\rho}_{x,y}(h)))$
CCF2STD	$Flag(\hat{\rho}_{x,y}(h)) = \begin{cases} 1 & \hat{\rho}_{x,y}(h) > 2Std(\hat{\rho}_{x,y}(h)) \\ 0 & -2Std(\hat{\rho}_{x,y}(h)) < \hat{\rho}_{x,y}(h) < 2Std(\hat{\rho}_{x,y}(h)) \\ -1 & \hat{\rho}_{x,y}(h) < -2Std(\hat{\rho}_{x,y}(h)) \end{cases}$

Spectral Density Analysis

Spectral analysis can be performed on the working series by specifying the OUTSPECTRA= option or by specifying the PLOTS=PERIODOGRAM or PLOTS=SPECTRUM option in the PROC TIMESERIES statement. PROC TIMESERIES uses the finite Fourier transform to decompose data series into a sum of sine and cosine terms of different amplitudes and wavelengths. The finite Fourier transform decomposition of the series x_t is

$$x_t = \frac{a_0}{2} + \sum_{k=1}^{K-1} f_k(a_k \cos \omega_k t + b_k \sin \omega_k t)$$

$$f_k = \begin{cases} 1/2 & \text{if } T \text{ is even and } k = K - 1 \\ 1 & \text{otherwise} \end{cases}$$

where

t	is the time subscript, $t = 0, 1, 2, \dots, T - 1$
x_t	are the equally spaced time series data
T	is the number of observations in the time series
K	is the number of frequencies in the Fourier decomposition: $K = \frac{T+2}{2}$ if T is even, $K = \frac{T+1}{2}$ if T is odd
k	is the frequency subscript, $k = 0, 1, 2, \dots, K - 1$
a_0	is the mean term: $a_0 = 2\bar{x}$
a_k	are the cosine coefficients
b_k	are the sine coefficients
ω_k	are the Fourier frequencies: $\omega_k = \frac{2\pi k}{T}$

The Fourier decomposition is performed after the ACCUMULATE=, DIF=, SDIF= and TRANSFORM= options in the ID and VAR statements have been applied.

Functions of the Fourier coefficients a_k and b_k can be plotted against frequency or against wavelength to form *periodograms*. The amplitude periodogram I_k is defined as follows:

$$I_k = \frac{T}{2}(a_k^2 + b_k^2)$$

Since the Fourier transform is an even, periodic function of frequency which repeats every T ordinates the periodogram is also. Values of I_k for all k therefore can be mapped to the unique values $I_k : k = 0 \dots K-1$ using the equations

$$\begin{aligned} I_k &= I_{-k} && \text{for all } k \\ I_k &= I_{k+nT} && \text{for } n = \pm 1, \pm 2, \pm 3, \dots \\ I_k &= I_{T-k} && \text{for } 0 \leq k \leq K-1 \end{aligned}$$

The periodogram, I_k , is an estimate at the discrete frequencies ω_k of the spectral density function which characterizes the series x_t . By smoothing the periodogram an improved spectral density estimate with reduced variance and bias can be achieved at these points. Smoothing can be accomplished either through use of a spectral window smoothing function or by applying a lag window filter to the series autocovariance function.

When the SPECTRA statement's DOMAIN=FREQUENCY option is in effect spectral density estimates are computed by smoothing the periodogram ordinates using the equation

$$S_k(M) = \sum_{\tau=K-T}^{K-1} w\left(\frac{\tau}{M}\right) I_{k+\tau}$$

where $w(\theta)$ is the spectral window function whose form is specified by either the KERNEL= option or the WEIGHTS option. M is the kernel scale parameter which acts as a frequency scaling factor in the spectral window smoothing function. Values of $I_{k+\tau}$ that fall outside of $0 \leq k + \tau \leq K-1$ are mapped to values inside this range by the equations presented previously.

When the DOMAIN=TIME option is specified spectral density values are estimated by applying a lag window filter, $\lambda(h, M)$, to the series autocovariance function. The spectral density estimate then can be computed from the filtered autocovariance function using the equation

$$S_k(M) = \sum_{h=-(T-1)}^{T-1} \lambda(h, M) \hat{\gamma}(h) \cos h\omega_k.$$

In this case the kernel scale parameter, M , serves as a scale factor for the lag length, h , in the time domain. In the lag window formulation the spectral density estimate is a consistent estimator as $T, M \rightarrow \infty$ under the conditions $\lambda(h, M) = 0$ for $|h| > M$, and $\lim_{T \rightarrow \infty} M/T = 0$. These conditions lead to the following parameterization of M provided by the SPECTRA statement:

$$M = cK^e$$

where the values $c > 0$ and $0 < e < 1$ satisfy the consistency conditions. To specify the kernel scale parameter explicitly, set $c =$ to the desired scale factor and $e = 0$.

For uniformity and computational efficiency all spectral density estimates are calculated using a spectral window weighting function, $w(\theta)$, applied to the periodogram ordinates. In the case where the DOMAIN=TIME option is specified the effective spectral window weighting function is computed by the equation

$$w_{\text{TIME}}(\theta) = \sum_{h=-(T-1)}^{T-1} \lambda(h, M) \cos h\theta.$$

Because the kernel scale parameter, M , serves as a lag scale factor in the time domain and bandwidth scale factor in the frequency domain the impact of M on spectral density estimates depends on the value of the DOMAIN= option. When DOMAIN=FREQUENCY increasing values of M decrease variance and increase bias in the spectral density estimates whereas when DOMAIN=TIME increasing values of M increase variance and decrease bias.

Using Kernel Specifications

You can specify one of ten different kernel smoothing functions in the SPECTRA statement. Five smoothing functions are available as KERNEL= options and five complementary smoothing functions which correspond to lag window filters are available when the KERNEL= option is used in conjunction with the DOMAIN=TIME option.

For example, a Parzen kernel with a support of 11 periodogram ordinates in the frequency domain can be specified using the kernel option:

```
spectra / parzen c=5 expon=0;
```

The TIMESERIES procedure supports the following spectral window kernel functions in the frequency domain where $x = \tau/M$:

BARTLETT: Bartlett kernel

$$w(x) = \begin{cases} 1 - |x| & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

PARZEN: Parzen kernel

$$w(x) = \begin{cases} 1 - 6|x|^2 + 6|x|^3 & 0 \leq |x| \leq \frac{1}{2} \\ 2(1 - |x|)^3 & \frac{1}{2} \leq |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

QS: quadratic spectral kernel

$$w(x) = \frac{3}{(2\pi x)^2} \left(\frac{\sin 2\pi x}{2\pi x} - \cos 2\pi x \right)$$

TUKEY: Tukey-Hanning kernel

$$w(x) = \begin{cases} (1 + \cos(\pi x))/2 & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

TRUNCAT: truncated kernel

$$w(x) = \begin{cases} 1 & |x| \leq 1 \\ 0 & \text{otherwise} \end{cases}$$

When the DOMAIN=TIME option is specified the five kernel functions above are interpreted as lag window filters on the autocovariance function. The lag window kernel functions correspond to the following spectral window smoothing functions where $\theta = 2\pi\tau/T$:

BARTLETT: Bartlett equivalent lag window filter

$$w(\theta) = \frac{1}{2\pi M} \left(\frac{\sin(M\theta/2)}{\sin(\theta/2)} \right)^2$$

PARZEN: Parzen equivalent lag window filter

$$w(\theta) = \frac{6}{\pi M^3} \left(\frac{\sin(M\theta/4)}{\sin(\theta/2)} \right)^4 \left(1 - \frac{2}{3} \sin^2(\theta/2) \right)$$

QS: quadratic spectral equivalent lag window filter

$$w(\theta) = \begin{cases} \frac{3M}{4\pi} (1 - (M\theta/\pi)^2) & |\theta| \leq \pi/M \\ 0 & |\theta| > \pi/M \end{cases}$$

TUKEY: Tukey-Hanning equivalent lag window filter

$$w(\theta) = \frac{1}{4} D_M(\theta - \pi/M) + \frac{1}{2} D_M(\theta) + \frac{1}{4} D_M(\theta + \pi/M)$$

$$D_M(\theta) = \frac{1}{2\pi} \frac{\sin[(M + 1/2)\theta]}{\sin(\theta/2)}$$

TRUNC: truncated equivalent lag window filter

$$w(\theta) = D_M(\theta)$$

Using Specification of Weight Constants

Any number of weighting constants can be specified. The constants are interpreted symmetrically about the middle weight. The middle constant (or the constant to the right of the middle if an even number of weight constants is specified) is the relative weight of the current periodogram ordinate. The constant immediately following the middle one is the relative weight of the next periodogram ordinate, and so on. The actual

weights used in the smoothing process are the weights specified in the WEIGHTS option scaled so that they sum to 1.

The moving average calculation reflects at each end of the periodogram to accommodate the periodicity of the periodogram function.

For example, a simple triangular weighting can be specified using the following WEIGHTS option:

```
spectra / weights 1 2 3 2 1;
```

Computational Method

If the number of observations, T , factors into prime integers that are less than or equal to 23, and the product of the square-free factors of T is less than 210, then the procedure uses the fast Fourier transform developed by Cooley and Tukey (1965) and implemented by Singleton (1969). If T cannot be factored in this way, then the procedure uses a Chirp-Z algorithm similar to that proposed by Monro and Branch (1976).

Missing Values

Missing values are replaced with an estimate of the mean to perform spectral analyses. This treatment of a series with missing values is consistent with the approach used by Priestley (1981).

Singular Spectrum Analysis

Given a time series, y_t , for $t = 1, \dots, T$, and a window length, $2 \leq L < T/2$, singular spectrum analysis Golyandina, Nekrutkin, and Zhigljavsky (2001) decompose the time series into spectral groupings using the following steps:

Embedding Step

Using the time series, form a $K \times L$ trajectory matrix, \mathbf{X} , with elements

$$\mathbf{X} = \{x_{k,l}\}_{k=1,l=1}^{K,L}$$

such that $x_{k,l} = y_{k-l+1}$ for $k = 1, \dots, K$ and $l = 1, \dots, L$ and where $K = T - L + 1$. By definition $L \leq K < T$, because $2 \leq L < T/2$.

Decomposition Step

Using the trajectory matrix, \mathbf{X} , apply singular value decomposition to the trajectory matrix

$$\mathbf{X} = \mathbf{U}\mathbf{Q}\mathbf{V}$$

where \mathbf{U} represents the $K \times L$ matrix that contains the left-hand-side (LHS) eigenvectors, where \mathbf{Q} represents the diagonal $L \times L$ matrix that contains the singular values, and where \mathbf{V} represents the $L \times L$ matrix that contains the right-hand-side (RHS) eigenvectors.

Therefore,

$$\mathbf{X} = \sum_{l=1}^L \mathbf{X}^{(l)} = \sum_{l=1}^L \mathbf{u}_l q_l \mathbf{v}_l^T$$

where $\mathbf{X}^{(l)}$ represents the $K \times L$ principal component matrix, \mathbf{u}_l represents the $K \times 1$ left-hand-side (LHS) eigenvector, q_l represents the singular value, and \mathbf{v}_l represents the $L \times 1$ right-hand-side (RHS) eigenvector associated with the l th window index.

Grouping Step

For each group index, $m = 1, \dots, M$, define a group of window indices $I_m \subset \{1, \dots, L\}$. Let

$$\mathbf{X}_{I_m} = \sum_{l \in I_m} \mathbf{X}^{(l)} = \sum_{l \in I_m} \mathbf{u}_l q_l \mathbf{v}_l^T$$

represent the grouped trajectory matrix for group I_m . If groupings represent a spectral partition,

$$\bigcup_{m=1}^M I_m = \{1, \dots, L\} \quad \text{and} \quad I_m \cap I_n = \emptyset \quad \text{for} \quad m \neq n$$

then according to the singular value decomposition theory,

$$\mathbf{X} = \sum_{m=1}^M \mathbf{X}_{I_m}$$

Averaging Step

For each group index, $m = 1, \dots, M$, compute the diagonal average of \mathbf{X}_{I_m} ,

$$\tilde{x}_t^{(m)} = \frac{1}{n_t} \sum_{l=s_t}^{e_t} x_{t-l+1,l}^{(m)}$$

where

$$\begin{array}{llll} s_t = 1, & e_t = t, & n_t = t & \text{for} \quad 1 \leq t < L \\ s_t = 1, & e_t = L, & n_t = L & \text{for} \quad L \leq t \leq T - L + 1 \\ s_t = T - t - 1, & e_t = L, & n_t = T - t + 1 & \text{for} \quad T - L + 1 < t \leq T \end{array}$$

If the groupings represent a spectral partition, then by definition

$$y_t = \sum_{m=1}^M \tilde{x}_t^{(m)}$$

Hence, singular spectrum analysis additively decomposes the original time series, y_t , into m component series $\tilde{x}_t^{(m)}$ for $m = 1, \dots, M$.

Specifying the Window Length

You can explicitly specify the maximum window length, $2 \leq L \leq 1000$, using the LENGTH= option or implicitly specify the window length using the INTERVAL= option in the ID statement or the SEASONALITY= option in the PROC TIMESERIES statement.

Either way the window length is reduced based on the accumulated time series length, T , to enforce the requirement that $2 \leq L \leq T/2$.

Specifying the Groups

You can use the GROUPS= option to explicitly specify the composition and number of groups, $I_m \subset \{1, \dots, L\}$ or use the THRESHOLDPCT= option in the SSA statement to implicitly specify the grouping. The THRESHOLDPCT= option is useful for removing noise or less dominant patterns from the accumulated time series.

Let $0 < \alpha < 1$ be the cumulative percent singular value THRESHOLDPCT=. Then the last group, $I_M = \{l_\alpha, \dots, L\}$, is determined by the smallest value such that

$$\left(\sum_{l=1}^{l_\alpha-1} q_l / \sum_{l=1}^L q_l \right) \geq \alpha \quad \text{where } 1 < l_\alpha \leq L$$

Using this rule, the last group, I_M , describes the least dominant patterns in the time series and the size of the last group is at least one and is less than the window length, $L \geq 2$.

The magnitudes of the principal components which are plotted using the PLOT=SSA option and selected by the THRESHOLDPCT= option are based on the singular values which appear on the diagonal of \mathbf{Q} . Alternatively, each principal component's contribution to variation in the series can be quantified by using the squares of the singular values. The relative contributions of the principal components to variation in the series are included in the printed tabular output produced by the PRINT=SSA option.

Data Set Output

The TIMESERIES procedure can create the OUT=, OUTCORR=, OUTCROSSCORR=, OUTDECOMP=, OUTSEASON=, OUTSPECTRA=, OUTSSA=, OUTSUM=, and OUTTREND= data sets. In general, these data sets contain the variables listed in the BY statement. If an analysis step that is related to an output data step fails, the values of this step are not recorded or are set to missing in the related output data set and appropriate error and/or warning messages are recorded in the log.

OUT= Data Set

The OUT= data set contains the variables specified in the BY, ID, VAR, and CROSSVAR statements. If the ID statement is specified, the ID variable values are aligned and extended based on the ALIGN=

and INTERVAL= options. The values of the variables specified in the VAR and CROSSVAR statements are accumulated based on the ACCUMULATE= option, and missing values are interpreted based on the SETMISSING= option.

OUTCORR= Data Set

The OUTCORR= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTCORR= data set records the correlations for each variable specified in a VAR statement (not the CROSSVAR statement).

When the CORR statement TRANSPOSE=NO option is omitted or specified explicitly, the variable *names* are related to correlation statistics specified in the CORR statement options and the variable *values* are related to the NLAG= or LAGS= option.

NAME	variable name
LAG	time lag
N	number of variance products
ACOV	autocovariances
ACF	autocorrelations
ACFSTD	autocorrelation standard errors
ACF2STD	an indicator of whether autocorrelations are less than (−1), greater than (1), or within (0) two standard errors of zero
ACFNORM	normalized autocorrelations
ACFPROB	autocorrelation probabilities
ACFLPROB	autocorrelation log probabilities
PACF	partial autocorrelations
PACFSTD	partial autocorrelation standard errors
PACF2STD	an indicator of whether partial autocorrelations are less than (−1), greater than (1), or within (0) two standard errors of zero
PACFNORM	partial normalized autocorrelations
PACFPROB	partial autocorrelation probabilities
PACFLPROB	partial autocorrelation log probabilities
IACF	inverse autocorrelations
IACFSTD	an indicator of whether inverse autocorrelations are less than (−1), greater than (1), or within (0) two standard errors of zero
IACF2STD	two standard errors beyond inverse autocorrelation
IACFNORM	normalized inverse autocorrelations
IACFPROB	inverse autocorrelation probabilities

IACFLPROB	inverse autocorrelation log probabilities
WN	white noise test Statistics
WNPROB	white noise test probabilities
WNLPROB	white noise test log probabilities

The preceding correlation statistics are computed for each specified time lag.

When the CORR statement TRANSPOSE=YES option is specified, the variable *values* are related to correlation statistics specified in the CORR statement and the variable *names* are related to the NLAG= or LAGS= options.

NAME	variable name
STAT	correlation statistic name
LABEL	correlation statistic label
LAG h	correlation statistics for lag h

OUTCROSSCORR= Data Set

The OUTCROSSCORR= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTCROSSCORR= data set records the cross-correlations for each variable specified in a VAR and the CROSSVAR statements.

When the CROSSCORR statement TRANSPOSE=NO option is omitted or specified explicitly, the variable *names* are related to cross-correlation statistics specified in the CROSSCORR statement options and the variable *values* are related to the NLAG= or LAGS= option.

NAME	variable name
CROSS	cross variable name
LAG	time lag
N	number of variance products
CCOV	cross-covariances
CCF	cross-correlations
CCFSTD	cross-correlation standard errors
CCF2STD	an indicator of whether cross-correlations are less than (-1) , greater than (1) , or within (0) two standard errors of zero
CCFNORM	normalized cross-correlations
CCFPROB	cross-correlation probabilities
CCFLPROB	cross-correlation log probabilities

The preceding cross-correlation statistics are computed for each specified time lag.

When the CROSSCORR statement TRANSPOSE=YES option is specified, the variable *values* are related to cross-correlation statistics specified in the CROSSCORR statement and the variable *names* are related to the NLAG= or LAGS= options.

<code>_NAME_</code>	variable name
<code>_CROSS_</code>	cross variable name
<code>_STAT_</code>	cross-correlation statistic name
<code>_LABEL_</code>	cross-correlation statistic label
<code>LAGh</code>	cross-correlation statistics for lag <i>h</i>

OUTDECOMP= Data Set

The OUTDECOMP= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTDECOMP= data set records the seasonal decomposition/adjustments for each variable specified in a VAR statement (not the CROSSVAR statement).

When the DECOMP statement TRANSPOSE=NO option is omitted or specified explicitly, the variable *names* are related to decomposition/adjustments specified in the DECOMP statement and the variable *values* are related to the ID statement INTERVAL= option and the PROC TIMESERIES statement SEASONALITY= option.

<code>_NAME_</code>	variable name
<code>_MODE_</code>	mode of decomposition
<code>_TIMEID_</code>	time ID values
<code>_SEASON_</code>	seasonal index
<code>ORIGINAL</code>	original series values
<code>TCC</code>	trend-cycle component
<code>SIC</code>	seasonal-irregular component
<code>SC</code>	seasonal component
<code>SCSTD</code>	seasonal component standard errors
<code>TCS</code>	trend-cycle-seasonal component
<code>IC</code>	irregular component
<code>SA</code>	seasonally adjusted series
<code>PCSA</code>	percent change seasonally adjusted series
<code>TC</code>	trend component
<code>CC</code>	cycle component

The preceding decomposition components are computed for each time period.

When the DECOMP statement TRANSPOSE=YES option is specified, the variable *values* are related to decomposition/adjustments specified in the DECOMP statement and the variable *names* are related to the ID statement INTERVAL= option, the PROC TIMESERIES statement SEASONALITY= option, and the DECOMP statement NPERIODS= option.

<code>_NAME_</code>	variable name
<code>_MODE_</code>	mode of decomposition name
<code>_COMP_</code>	decomposition component name
<code>_LABEL_</code>	decomposition component label
<code>PERIODt</code>	decomposition component value for time period t

OUTPROCINFO= Data Set

The OUTPROCINFO= data set contains information about the run of the TIMESERIES procedure. The following variables are present:

<code>_SOURCE_</code>	set to the name of the procedure, in this case TIMESERIES
<code>_NAME_</code>	name of the item being reported
<code>_LABEL_</code>	descriptive label for the item in <code>_NAME_</code>
<code>_STAGE_</code>	set to the current stage of the procedure; for TIMESERIES this is set to ALL
<code>_VALUE_</code>	value of the item specified in <code>_NAME_</code>

OUTSEASON= Data Set

The OUTSEASON= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTSEASON= data set records the seasonal statistics for each variable specified in a VAR statement (not the CROSSVAR statement).

When the SEASON statement TRANSPOSE=NO option is omitted or specified explicitly, the variable *names* are related to seasonal statistics specified in the SEASON statement and the variable *values* are related to the ID statement INTERVAL= option or the PROC TIMESERIES statement SEASONALITY= option.

<code>_NAME_</code>	variable name
<code>_TIMEID_</code>	time ID values
<code>_SEASON_</code>	seasonal index
<code>NOBS</code>	number of observations

N	number of nonmissing observations
NMISS	number of missing observations
MINIMUM	minimum value
MAXIMUM	maximum value
RANGE	range value
SUM	summation value
MEAN	mean value
STDDEV	standard deviation
CSS	corrected sum of squares
USS	uncorrected sum of squares
MEDIAN	median value

The preceding statistics are computed for each season.

When the SEASON statement TRANSPOSE=YES option is specified, the variable *values* are related to seasonal statistics specified in the SEASON statement and the variable *names* are related to the ID statement INTERVAL= option or the PROC TIMESERIES statement SEASONALITY= option.

NAME	variable name
STAT	season statistic name
LABEL	season statistic name
SEASON s	season statistic value for season s

OUTSPECTRA= Data Set

The OUTSPECTRA= data set contains the variables that are specified in the BY statement in addition to the variables listed below. The OUTSPECTRA= data set records the frequency domain analysis for each variable specified in a VAR statement (not the CROSSVAR statement).

The following variable names are related to correlation statistics specified in the SPECTRA statement options.

NAME	variable name
FREQ	frequency in radians from 0 to π
PERIOD	period or wavelength
COS	cosine transform
SIN	sine transform
P	periodogram
S	spectral density estimates

OUTSSA= Data Set

The OUTSSA= data set contains the variables that are specified in the BY statement in addition to the variables listed below. The OUTSSA= data set records the singular spectrum analysis (SSA) for each variable specified in a VAR statement (not the CROSSVAR statement).

When the SSA statement TRANSPOSE=NO option is omitted or specified explicitly, the variable *names* are related to singular spectrum analysis specified in the SSA statement, and the variable *values* are related to the INTERVAL= option in the ID statement and the SEASONALITY= option in the PROC TIMESERIES statement.

NAME	variable name
TIMEID	time ID values
CYCLE	cycle index
SEASON	seasonal index
ORIGINAL	original series values
_GROUP i _	SSA result groups

The _GROUP i _ decomposition components are computed for each time period.

When the SSA statement TRANSPOSE=YES option is specified, the variable *values* are related to singular spectrum analysis specified in the SSA statement, and the variable *names* are related to the INTERVAL= option in the ID statement, the SEASONALITY= option in the PROC TIMESERIES statement, or the NPERIODS= option in the SSA statement. The following variables are written to a transposed OUTSSA= data set:

NAME	variable name
GROUP	group number
PERIOD t	SSA group value for time period t

OUTSUM= Data Set

The OUTSUM= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTSUM= data set records the descriptive statistics for each variable specified in a VAR statement (not the CROSSVAR statement).

Variables related to descriptive statistics are based on the ACCUMULATE= and SETMISSING= options in the ID and VAR statements:

NAME	variable name
STATUS	status flag that indicates whether the requested analyses were successful
NOBS	number of observations

N	number of nonmissing observations
NMISS	number of missing observations
MINIMUM	minimum value
MAXIMUM	maximum value
AVG	average value
STDDEV	standard deviation

The OUTSUM= data set contains the descriptive statistics of the (accumulated) time series.

OUTTREND= Data Set

The OUTTREND= data set contains the variables specified in the BY statement as well as the variables listed below. The OUTTREND= data set records the trend statistics for each variable specified in a VAR statement (not the CROSSVAR statement).

When the TREND statement TRANSPOSE=NO option is omitted or explicitly specified, the variable *names* are related to trend statistics specified in the TREND statement and the variable *values* are related to the INTERVAL= option in the ID statement or the SEASONALITY= option in the PROC TIMESERIES statement.

NAME	variable name
TIMEID	time ID values
SEASON	seasonal index
NOBS	number of observations
N	number of nonmissing observations
NMISS	number of missing observations
MINIMUM	minimum value
MAXIMUM	maximum value
RANGE	range value
SUM	summation value
MEAN	mean value
STDDEV	standard deviation
CSS	corrected sum of squares
USS	uncorrected sum of squares
MEDIAN	median value

The preceding statistics are computed for each time period.

When the TREND statement TRANSPOSE=YES option is specified, the variable *values* related to trend statistics specified in the TREND statement and the variable *names* are related to the INTERVAL= option in

the ID statement, the SEASONALITY= option in the PROC TIMESERIES statement, or the NPERIODS= option in the TREND statement. The following variables are written to the OUTTREND= data set:

<code>_NAME_</code>	variable name
<code>_STAT_</code>	trend statistic name
<code>_LABEL_</code>	trend statistic name
<code>PERIODt</code>	trend statistic value for time period t

`_STATUS_` Variable Values

The `_STATUS_` variable that appears in the OUTSUM= data set contains a code that specifies whether the analysis has been successful or not. The `_STATUS_` variable can take the following values:

0	success
1000	transactional trend statistics failure
2000	transactional seasonal statistics failure
3000	accumulation failure
4000	missing value interpretation failure
6000	series is all missing
7000	transformation failure
8000	differencing failure
9000	unable to compute descriptive statistics
10000	seasonal decomposition failure
11000	correlation analysis failure
15000	singular spectrum analysis failure
16000	spectral analysis failure

Printed Output

The TIMESERIES procedure optionally produces printed output by using the Output Delivery System (ODS). By default, the procedure produces no printed output. All output is controlled by the PRINT= and PRINTDETAILS options associated with the PROC TIMESERIES statement. In general, if an analysis step related to printed output fails, the values of this step are not printed and appropriate error or warning messages or both are recorded in the log. The printed output is similar to the output data set, and these similarities are described below.

`PRINT=DECOMP` prints the seasonal decomposition similar to the OUTDECOMP= data set.

PRINT=DESCSTATS	prints a table of descriptive statistics for each variable.
PRINT=SEASONS	prints the seasonal statistics similar to the OUTSEASON= data set.
PRINT=SSA	prints the singular spectrum analysis similar to the OUTSSA= data set.
PRINT=SUMMARY	prints the summary statistics similar to the OUTSUM= data set.
PRINT=TRENDS	prints the trend statistics similar to the OUTTREND= data set.
PRINTDETAILS	prints each table with greater detail.

If PRINT=SEASONS and the PRINTDETAILS options are both specified, all seasonal statistics are printed.

ODS Table Names

Table 32.4 relates the PRINT= options to ODS tables:

Table 32.4 ODS Tables Produced in PROC TIMESERIES

ODS Table Name	Description	Statement	Option
SeasonalDecomposition	Seasonal decomposition	PRINT	DECOMP
DescStats	Descriptive statistics	PRINT	DESCSTATS
GlobalStatistics	Global statistics	PRINT	SEASONS
SeasonStatistics	Season statistics	PRINT	SEASONS
StatisticsSummary	Statistics summary	PRINT	SUMMARY
TrendStatistics	Trend statistics	PRINT	TRENDS
GlobalStatistics	Global statistics	PRINT	TRENDS
SSASingularValues	SSA singular values	PRINT	SSA
SSAResults	SSA results	PRINT	SSA

The tables are related to a single series within a BY group.

ODS Graphics Names

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the graphical output produced by the TIMESERIES procedure. PROC TIMESERIES assigns a name to each graph it creates. These names are listed in [Table 32.5](#).

Table 32.5 ODS Graphics Produced by PROC TIMESERIES

ODS Graph Name	Plot Description	Statement	Option
ACFPlot	Autocorrelation function	PLOTS	ACF
ACFNORMPlot	Normalized autocorrelation function	PLOTS	ACF
CCFNORMPlot	Normalized cross-correlation function	CROSSPLOTS	CCF
CCFPlot	Cross-correlation function	CROSSPLOTS	CCF
CorrelationPlots	Correlation graphics panel	PLOTS	CORR
CrossSeriesPlot	Cross series plot	CROSSPLOTS	SERIES
CycleComponentPlot	Cycle component	PLOTS	CC
CyclePlot	Seasonal cycles plot	PLOTS	CYCLES
DecompositionPlots	Decomposition graphics panel	PLOTS	DECOMP
IACFPlot	Inverse autocorrelation function	PLOTS	IACF
IACFNORMPlot	Normalized inverse autocorrelation function	PLOTS	IACF
IrregularComponentPlot	Irregular component	PLOTS	IC
PACFPlot	Partial autocorrelation function	PLOTS	PACF
PACFNORMPlot	Standardized partial autocorrelation function	PLOTS	PACF
PercentChangeAdjustedPlot	Percent-change seasonally adjusted	PLOTS	PCSA
Periodogram	Periodogram versus period	PLOTS	PERIODOGRAM
ResidualPlot	Residual time series plot	PLOTS	RESIDUAL
SeasonallyAdjustedPlot	Seasonally adjusted	PLOTS	SA
SeasonalComponentPlot	Seasonal component	PLOTS	SC
SeasonalIrregularComponentPlot	Seasonal-irregular component	PLOTS	SIC
SeriesHistogram	Histogram of series values	PLOTS	HISTOGRAM
SeriesPlot	Time series plot	PLOTS	SERIES

Table 32.5 (continued)

ODS Graph Name	Plot Description	Statement	Option
SpectralDensityPlot	Spectral density versus period	PLOTS	SPECTRUM
SSASingularValuesPlot	SSA singular values	PLOTS	SSA
SSAResultsPlot	SSA results	PLOTS	SSA
TrendComponentPlot	Trend component	PLOTS	TC
TrendCycleComponentPlot	Trend-cycle component	PLOTS	TCC
TrendCycleSeasonalPlot	Trend-cycle-seasonal component	PLOTS	TCS
WhiteNoiseLogProbabilityPlot	White noise log probability	PLOTS	WN
WhiteNoiseProbabilityPlot	White noise probability	PLOTS	WN

Examples: TIMESERIES Procedure

Example 32.1: Accumulating Transactional Data into Time Series Data

This example illustrates using the TIMESERIES procedure to accumulate time-stamped transactional data that has been recorded at no particular frequency into time series data at a specific frequency. After the time series is created, the various SAS/ETS procedures related to time series analysis, seasonal adjustment/decomposition, modeling, and forecasting can be used to further analyze the time series data.

Suppose that the input data set WORK.RETAIL contains variables STORE and TIMESTAMP and numerous other numeric transaction variables. The BY variable STORE contains values that break up the transactions into groups (BY groups). The time ID variable TIMESTAMP contains SAS date values recorded at no particular frequency. The other data set variables contain the numeric transaction values to be analyzed. It is further assumed that the input data set is sorted by the variables STORE and TIMESTAMP. The following statements form monthly time series from the transactional data based on the median value (AC-CUMULATE=MEDIAN) of the transactions recorded with each time period. Also, the accumulated time series values for time periods with no transactions are set to zero instead of to missing (SETMISS=0) and only transactions recorded between the first day of 1998 (START='01JAN1998'D) and last day of 2000 (END='31JAN2000'D) are considered and, if needed, extended to include this range.

```
proc timeseries data=retail out=mseries;
  by store;
  id timestamp interval=month
    accumulate=median
```

```

        setmiss=0
        start='01jan1998'd
        end   ='31dec2000'd;
    var item1-item8;
run;

```

The monthly time series data are stored in the data WORK.MSERIES. Each BY group associated with the BY variable STORE contains an observation for each of the 36 months associated with the years 1998, 1999, and 2000. Each observation contains the variable STORE, TIMESTAMP, and each of the analysis variables in the input data set.

After each set of transactions has been accumulated to form corresponding time series, accumulated time series can be analyzed using various time series analysis techniques. For example, exponentially weighted moving averages can be used to smooth each series. The following statements use the EXPAND procedure to smooth the analysis variable named STOREITEM.

```

proc expand data=mseries out=smoothed from=month;
    by store;
    id date;
    convert storeitem=smooth / transform=(ewma 0.1);
run;

```

The smoothed series are stored in the data set WORK.SMOOTHED. The variable SMOOTH contains the smoothed series.

If the time ID variable TIMESTAMP contains SAS datetime values instead of SAS date values, the INTERVAL=, START=, and END= options must be changed accordingly and the following statements could be used:

```

proc timeseries data=retail out=tseries;
    by store;
    id timestamp interval=dtmonth
        accumulate=median
        setmiss=0
        start='01jan1998:00:00:00'dt
        end   ='31dec2000:00:00:00'dt;
    var _numeric_;
run;

```

The monthly time series data are stored in the data WORK.TSERIES, and the time ID values use a SAS datetime representation.

Example 32.2: Trend and Seasonal Analysis

This example illustrates using the TIMESERIES procedure for trend and seasonal analysis of time-stamped transactional data.

Suppose that the data set SASHELP.AIR contains two variables: DATE and AIR. The variable DATE contains sorted SAS date values recorded at no particular frequency. The variable AIR contains the transaction values to be analyzed.

The following statements accumulate the transactional data on an average basis to form a quarterly time series and perform trend and seasonal analysis on the transactions.

```
proc timeseries data=sashelp.air
    out=series
    outtrend=trend
    outseason=season print=seasons;
    id date interval=qtr accumulate=avg;
    var air;
run;
```

The time series is stored in the data set WORK.SERIES, the trend statistics are stored in the data set WORK.TREND, and the seasonal statistics are stored in the data set WORK.SEASON. Additionally, the seasonal statistics are printed (PRINT=SEASONS) and the results of the seasonal analysis are shown in [Output 32.2.1](#).

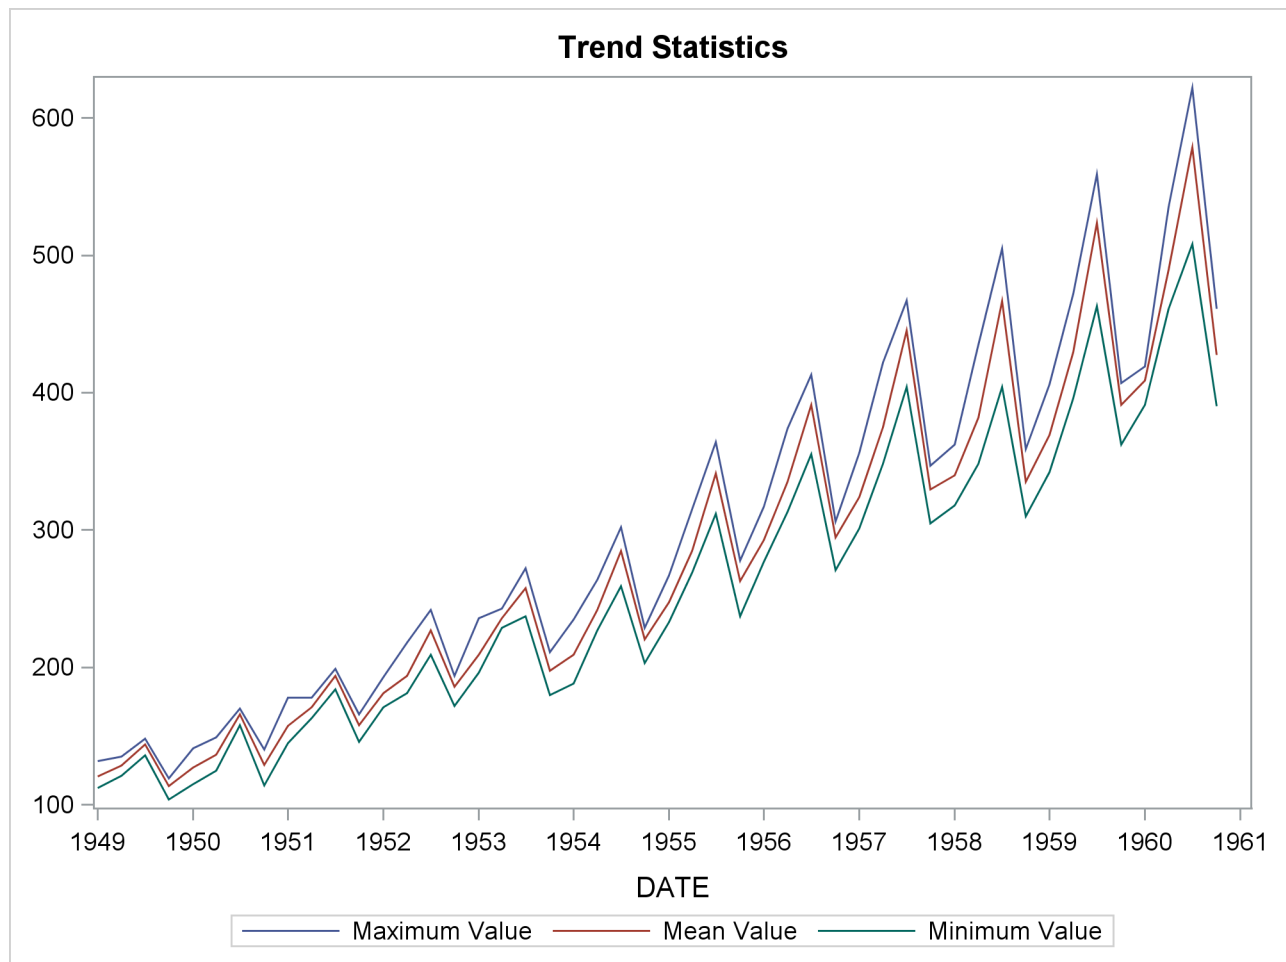
Output 32.2.1 Seasonal Statistics Table

The TIMESERIES Procedure						
Season Statistics for Variable AIR						
Season Index	N	Minimum	Maximum	Sum	Mean	Standard Deviation
1	36	112.0000	419.0000	8963.00	248.9722	95.65189
2	36	121.0000	535.0000	10207.00	283.5278	117.61839
3	36	136.0000	622.0000	12058.00	334.9444	143.97935
4	36	104.0000	461.0000	9135.00	253.7500	101.34732

Using the trend statistics stored in the WORK.TREND data set, the following statements plot various trend statistics associated with each time period over time.

```
title1 "Trend Statistics";
proc sgplot data=trend;
    series x=date y=max / lineattrs=(pattern=solid);
    series x=date y=mean / lineattrs=(pattern=solid);
    series x=date y=min / lineattrs=(pattern=solid);
    yaxis display=(nolabel);
    format date year4.;
run;
```

The results of this trend analysis are shown in [Output 32.2.2](#).

Output 32.2.2 Trend Statistics Plot

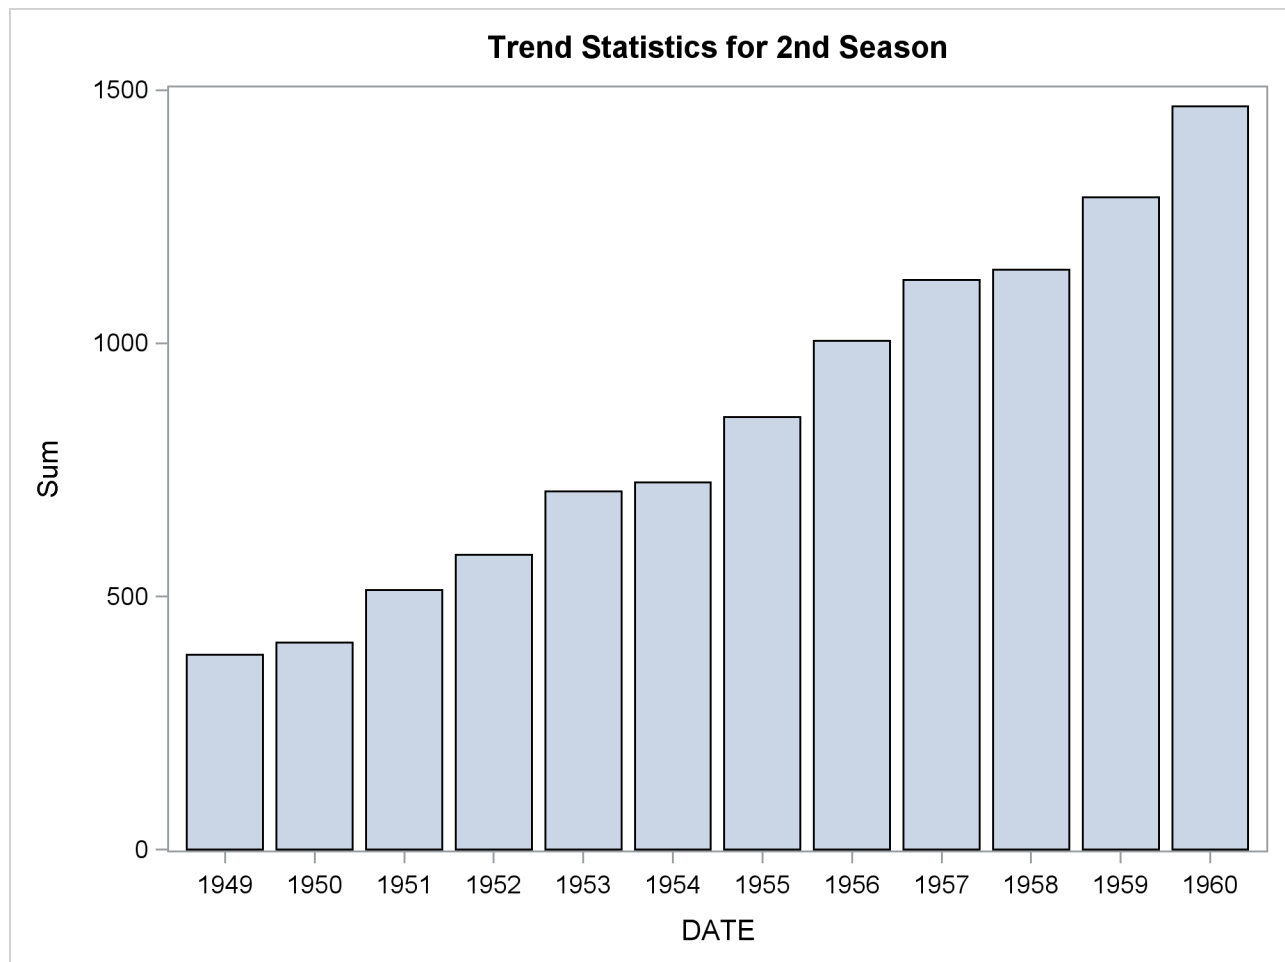
Using the trend statistics stored in the WORK.TREND data set, the following statements chart the sum of the transactions associated with each time period for the second season over time.

```

title1 "Trend Statistics for 2nd Season";
proc sgplot data=trend;
  where _season_ = 2;
  vbar date / freq=sum;
  format date year4.;
  yaxis label='Sum';
run;

```

The results of this trend analysis are shown in [Output 32.2.3](#).

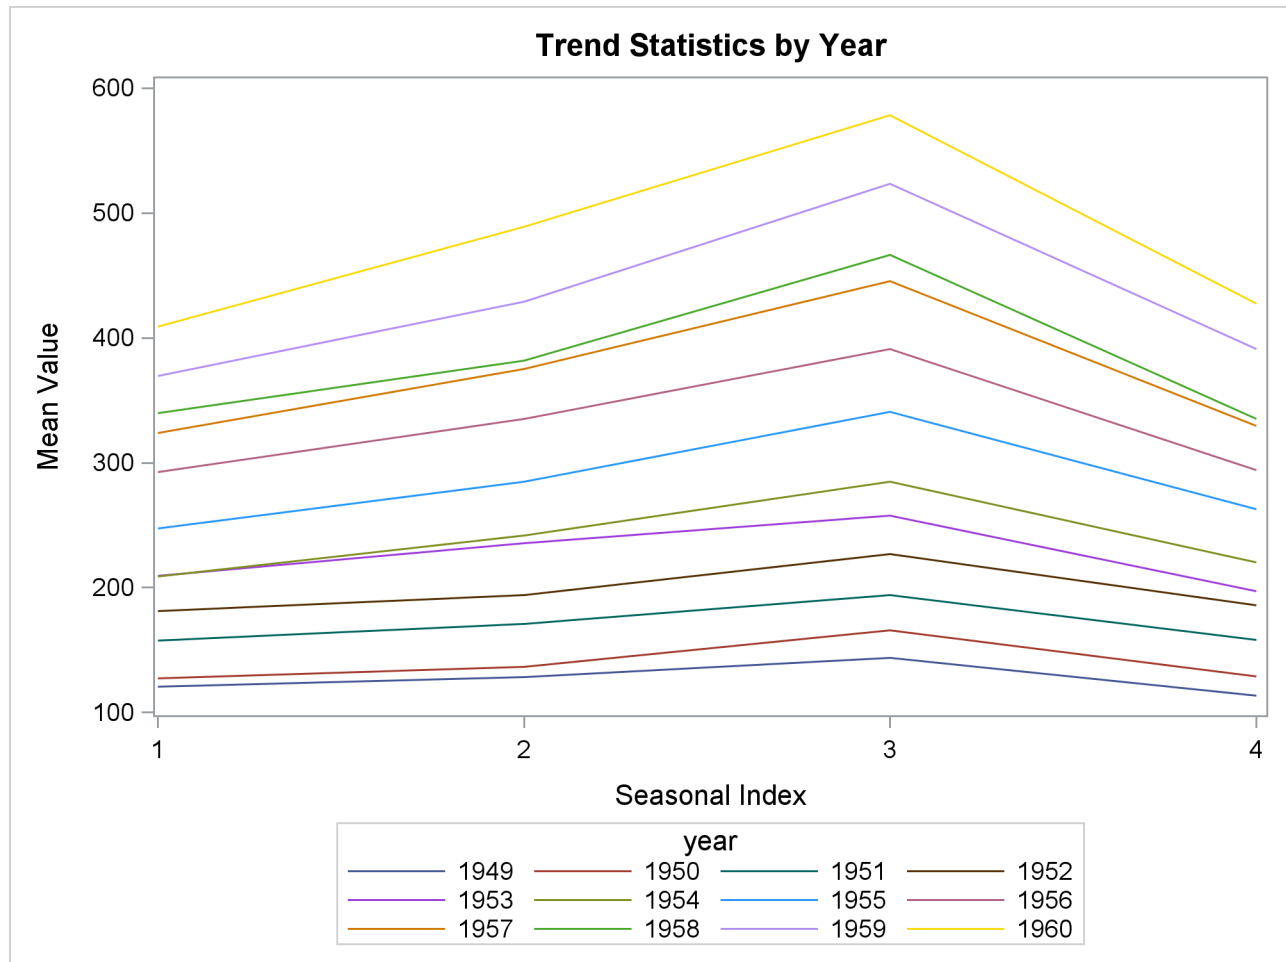
Output 32.2.3 Trend Statistics Bar Chart

Using the trend statistics stored in the WORK.TREND data set, the following statements plot the mean of the transactions associated with each time period by each year over time.

```
data trend;
  set trend;
  year = year(date);
run;

title1 "Trend Statistics by Year";
proc sgplot data=trend;
  series x=_season_ y=mean / group=year lineattrs=(pattern=solid);
  xaxis values=(1 to 4 by 1);
run;
```

The results of this trend analysis are shown in [Output 32.2.4](#).

Output 32.2.4 Trend Statistics

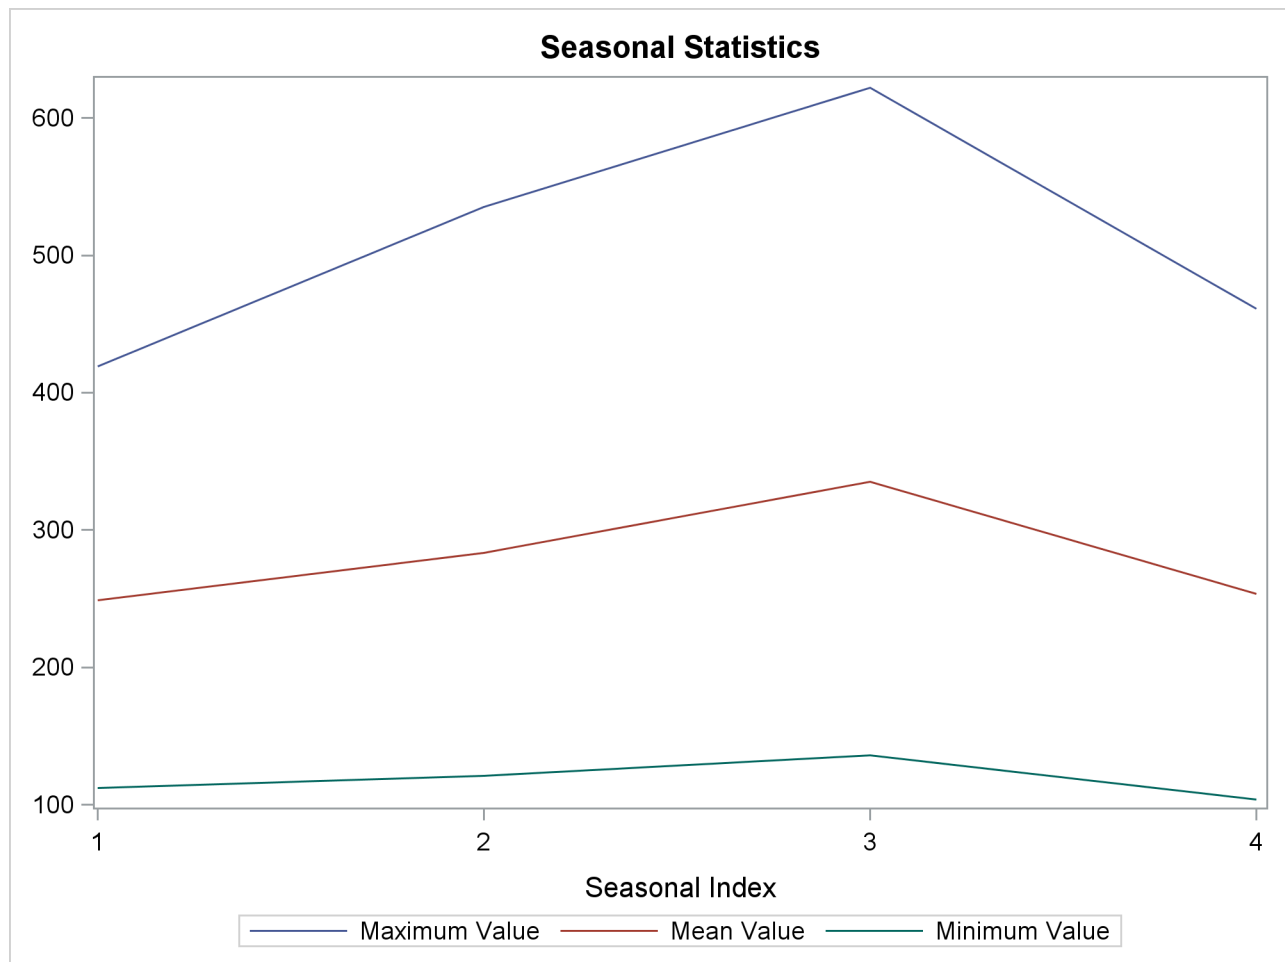
Using the season statistics stored in the WORK.SEASON data set, the following statements plot various season statistics for each season.

```

title1 "Seasonal Statistics";
proc sgplot data=season;
  series x=_season_ y=max / lineattrs=(pattern=solid);
  series x=_season_ y=mean / lineattrs=(pattern=solid);
  series x=_season_ y=min / lineattrs=(pattern=solid);
  yaxis display=(nolabel);
  xaxis values=(1 to 4 by 1);
run;

```

The results of this seasonal analysis are shown in [Output 32.2.5](#).

Output 32.2.5 Seasonal Statistics Plot**Example 32.3: Illustration of ODS Graphics**

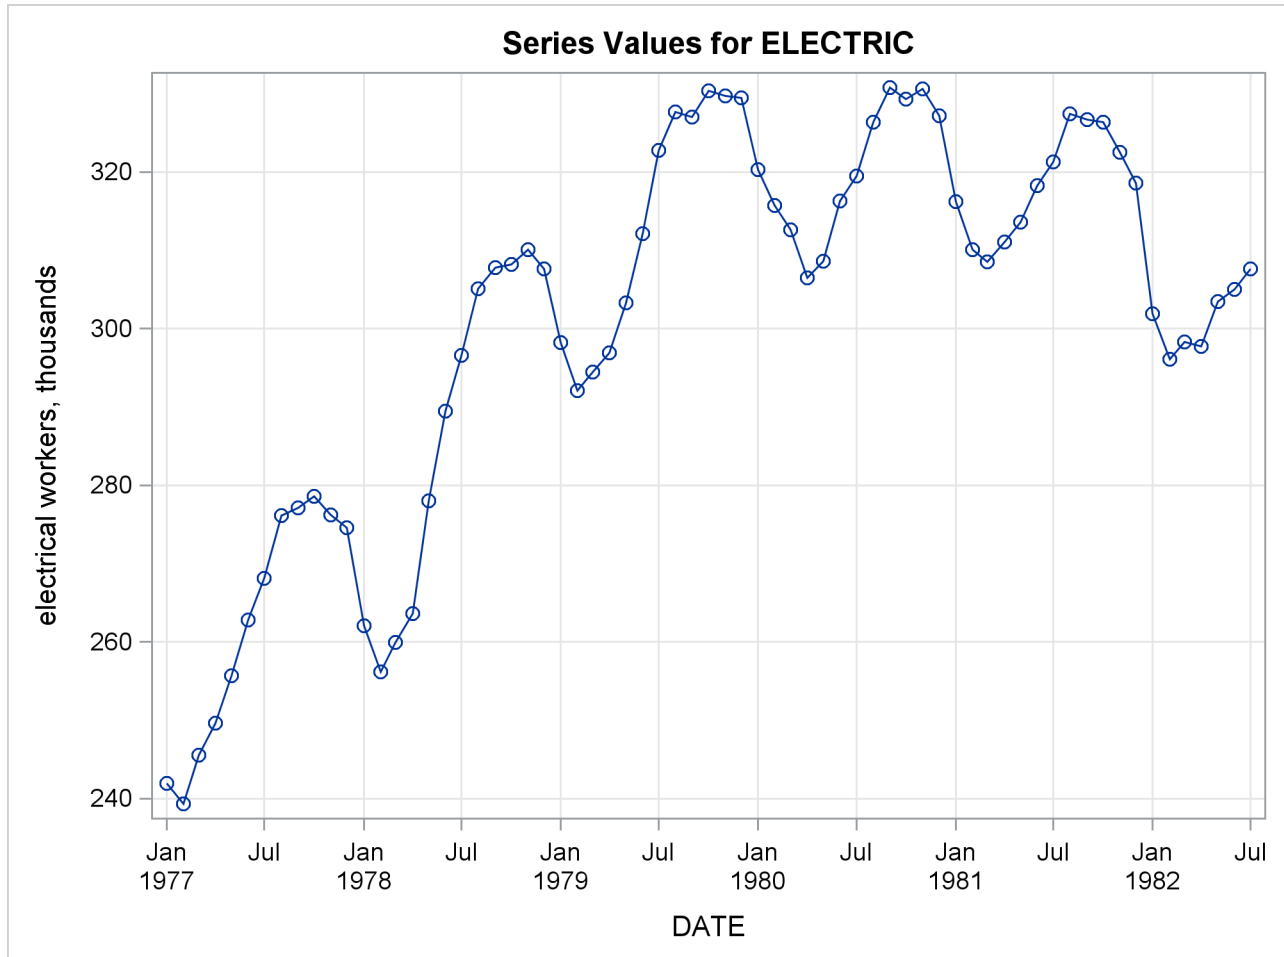
This example illustrates the use of ODS graphics.

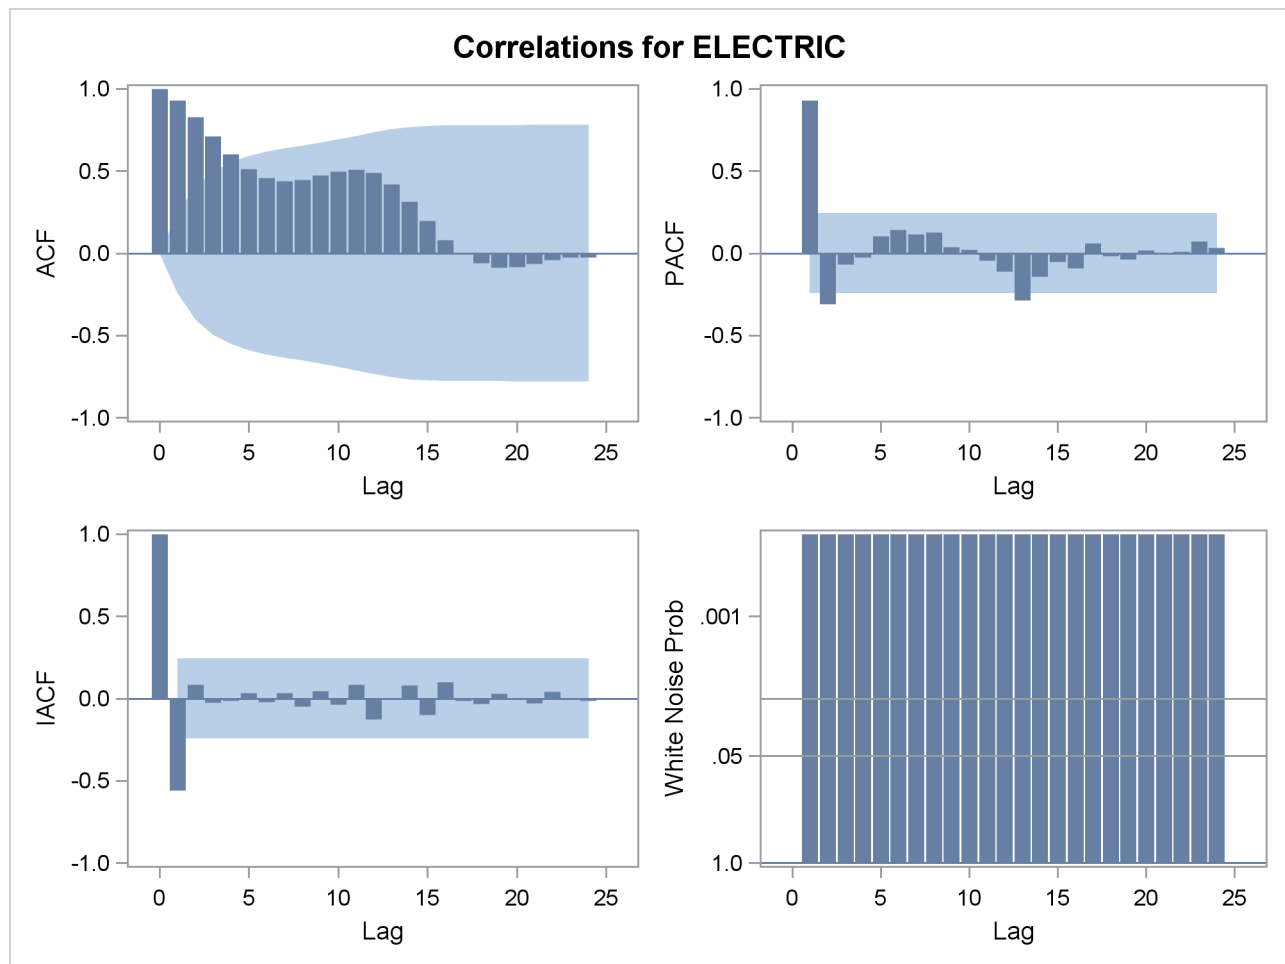
The following statements use the SASHELP.WORKERS data set to study the time series of electrical workers and its interaction with the simply differenced series of masonry workers. The series plot, the correlation panel, the seasonal adjustment panel, and all cross-series plots are requested. [Output 32.3.1](#) through [Output 32.3.4](#) show a selection of the plots created.

The graphical displays are requested by specifying the [PLOTS=](#) or [CROSSPLOTS=](#) options in the PROC TIMESERIES statement. For information about the graphics available in the TIMESERIES procedure, see the section “[ODS Graphics Names](#)” on page 2072.

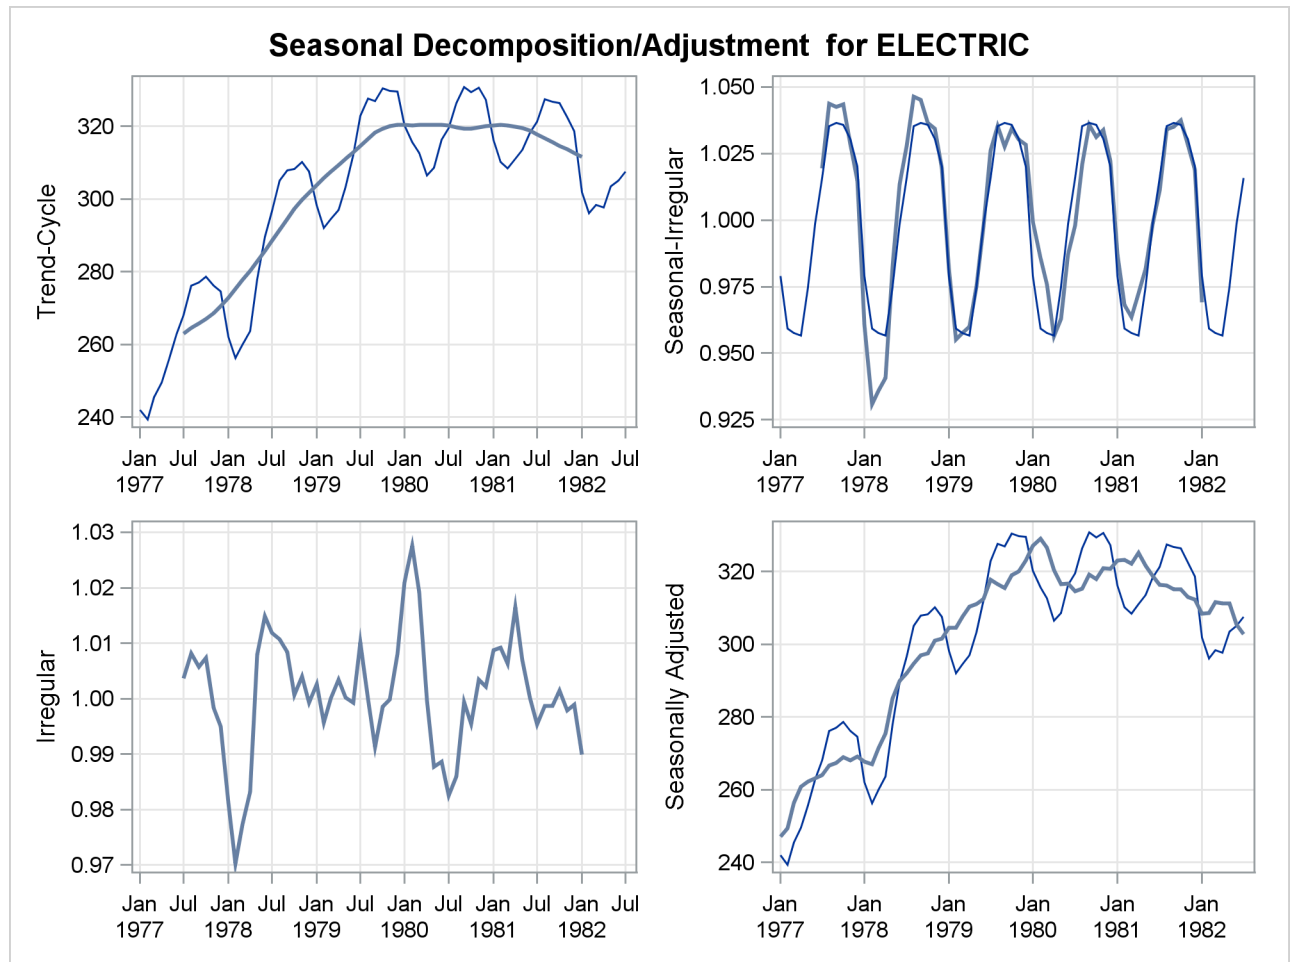
```
title "Illustration of ODS Graphics";
proc timeseries data=sashelp.workers out=_null_
               plots=(series corr decomp)
               crossplots=all;
  id date interval=month;
```

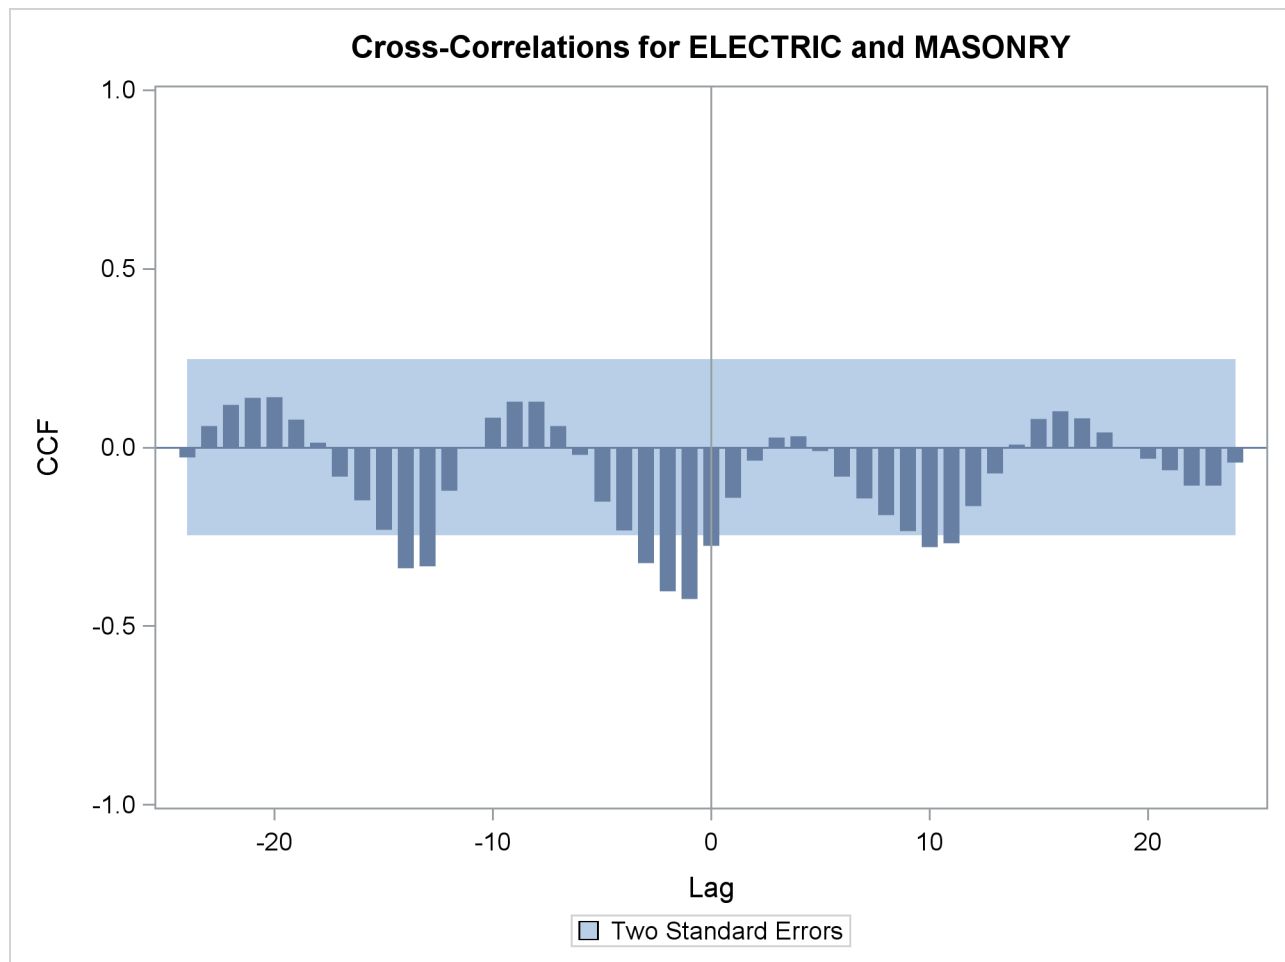
```
var electric;  
crossvar masonry / dif=(1);  
run;
```

Output 32.3.1 Series Plot

Output 32.3.2 Correlation Panel

Output 32.3.3 Seasonal Decomposition Panel



Output 32.3.4 Cross-Correlation Plot

Example 32.4: Illustration of Spectral Analysis

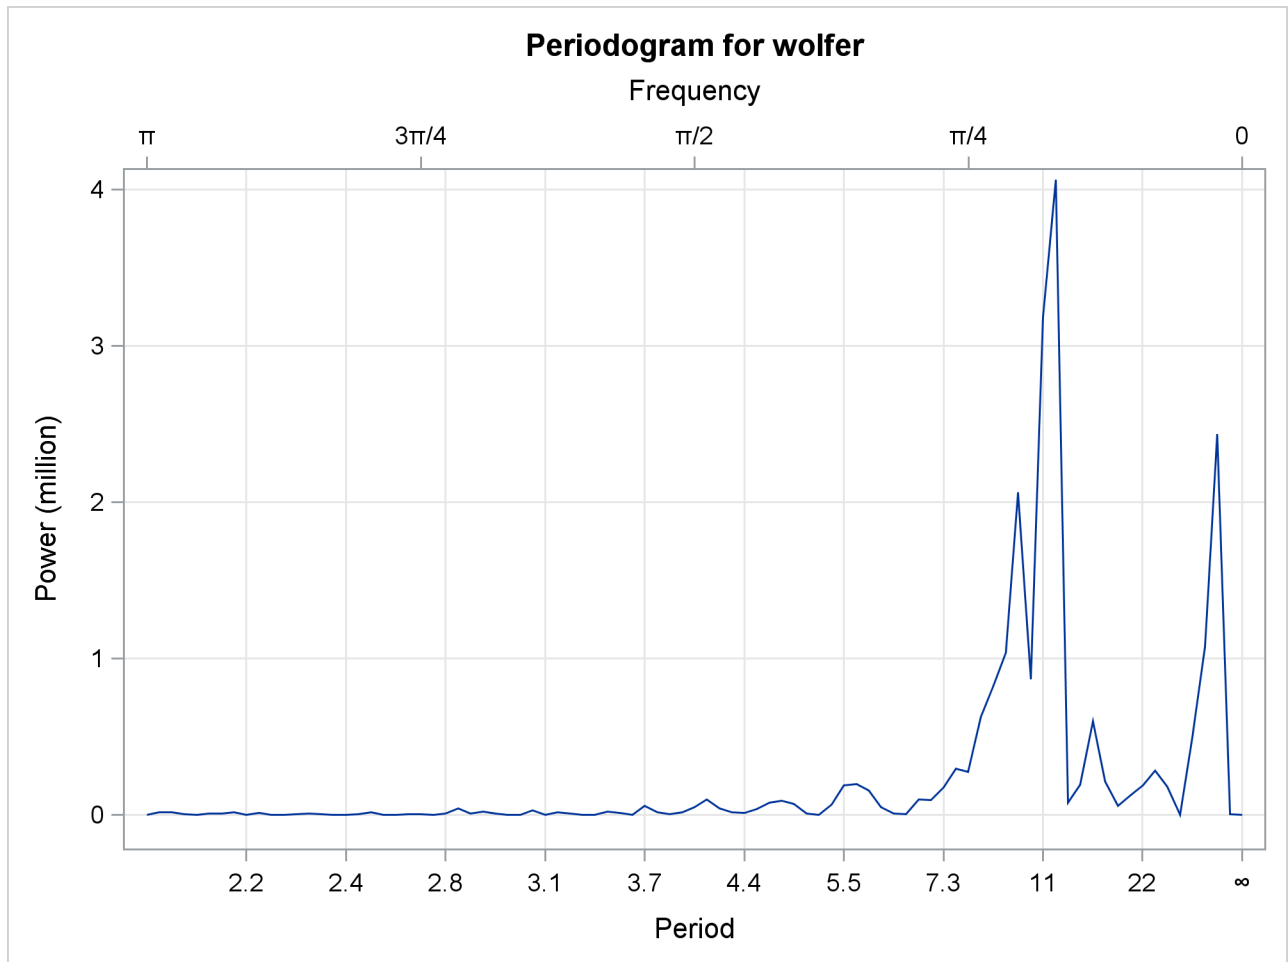
This example illustrates the use of spectral analysis.

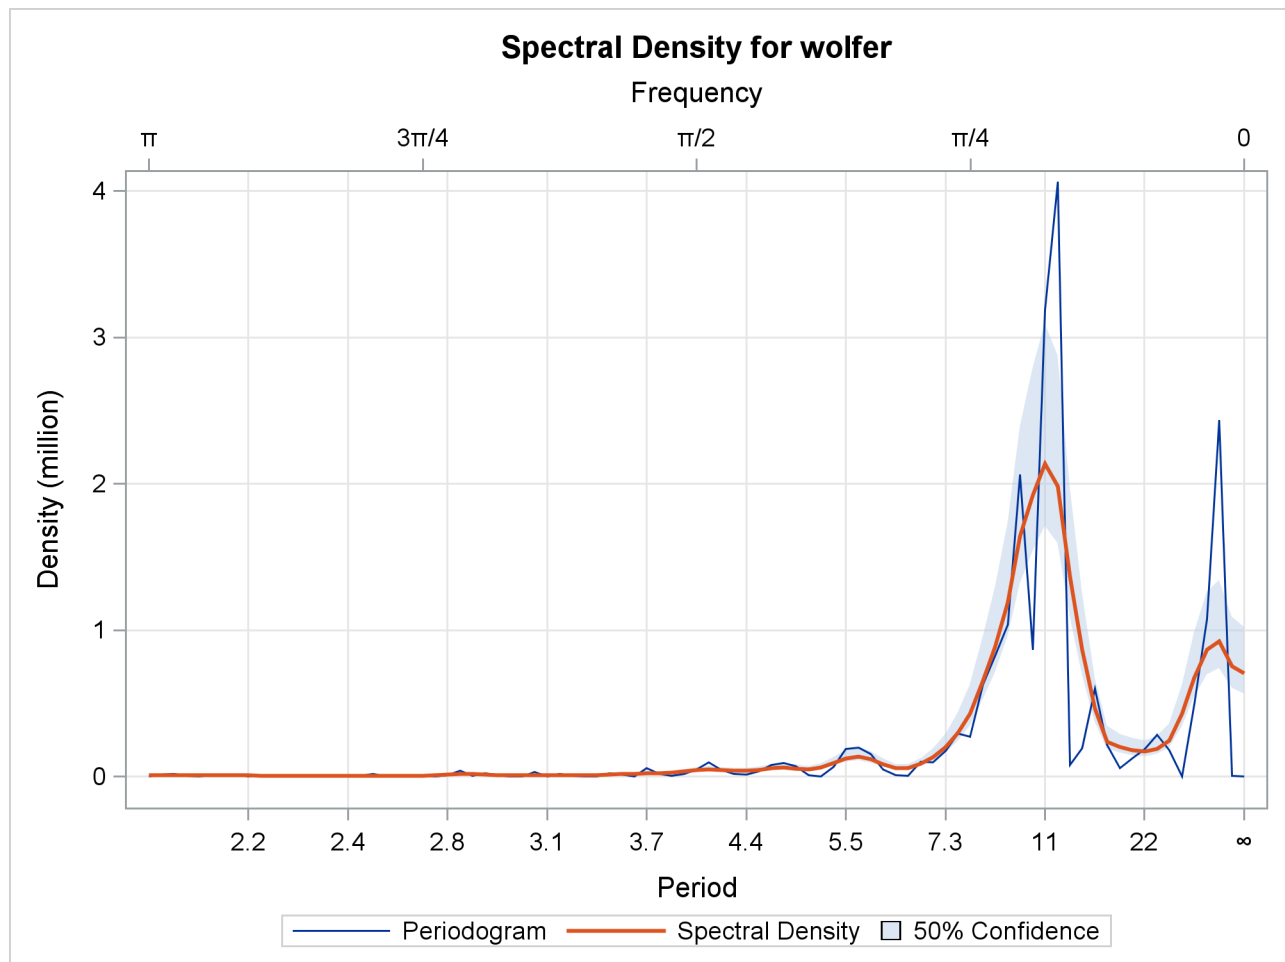
The following statements perform a spectral analysis on the SUNSPOT dataset. The periodogram is displayed as a function of the period and frequency in [Output 32.4.1](#). The estimated spectral density together with its 50% confidence limits are displayed in [Output 32.4.2](#).

```
title "Wolfer's Sunspot Data";

proc timeseries data=sunspot plot=(series periodogram spectrum);
  var wolfer;
  id year interval=year;
  spectra freq period p s / adjmean bart c=1.5 expon=0.2;
run;
```

Output 32.4.1 Periodogram



Output 32.4.2 Spectral Density Plot**Example 32.5: Illustration of Singular Spectrum Analysis**

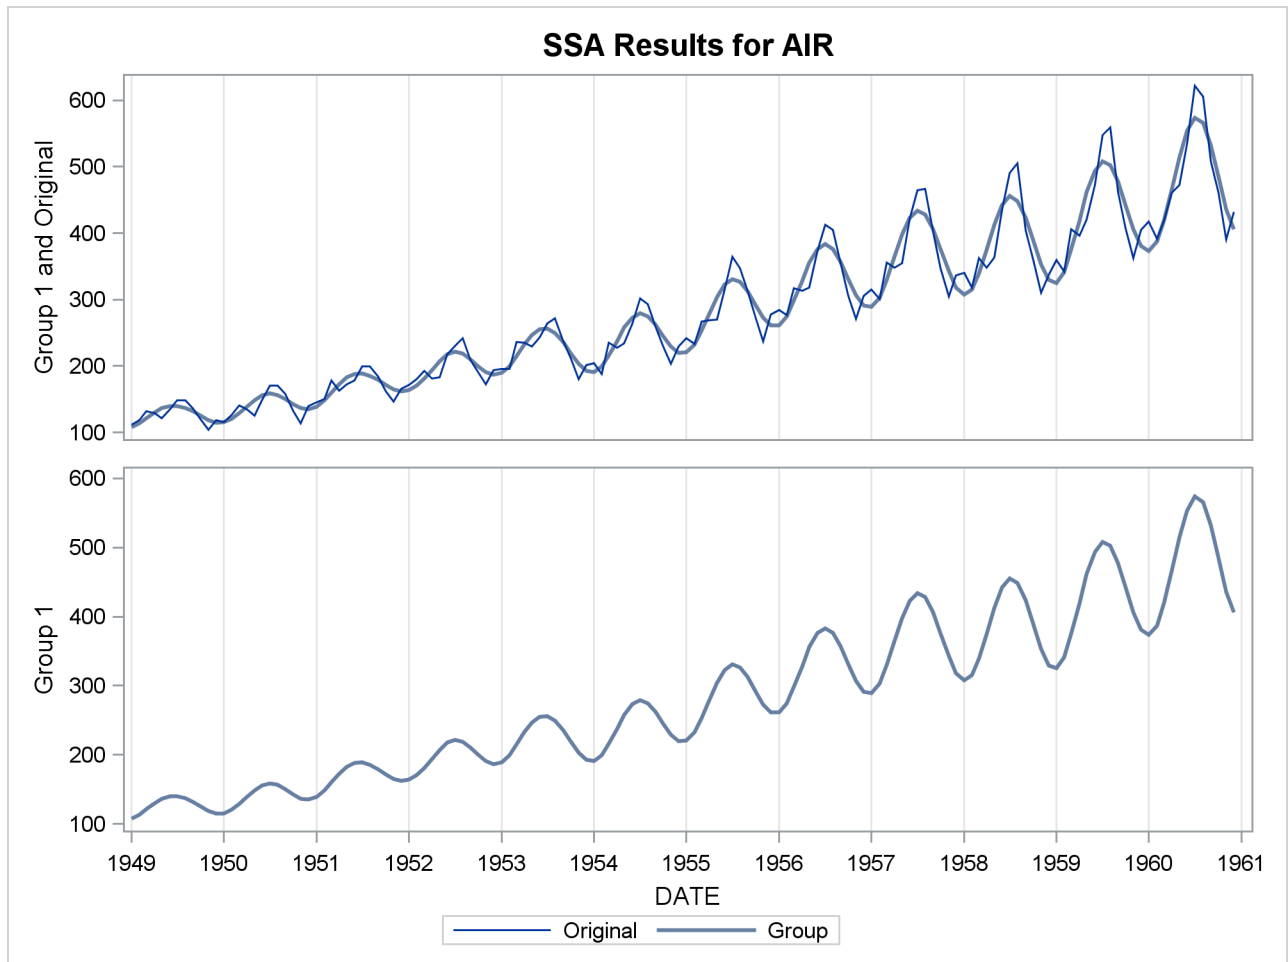
This example illustrates the use of singular spectrum analysis.

The following statements extract two additive components from the SASHELP.AIR time series by using the THRESHOLDPCT= option to specify that the first component represent 80% of the variability in the series. The resulting groupings, consisting of the first three and remaining nine singular value components, are presented in [Output 32.5.1](#) through [Output 32.5.3](#).

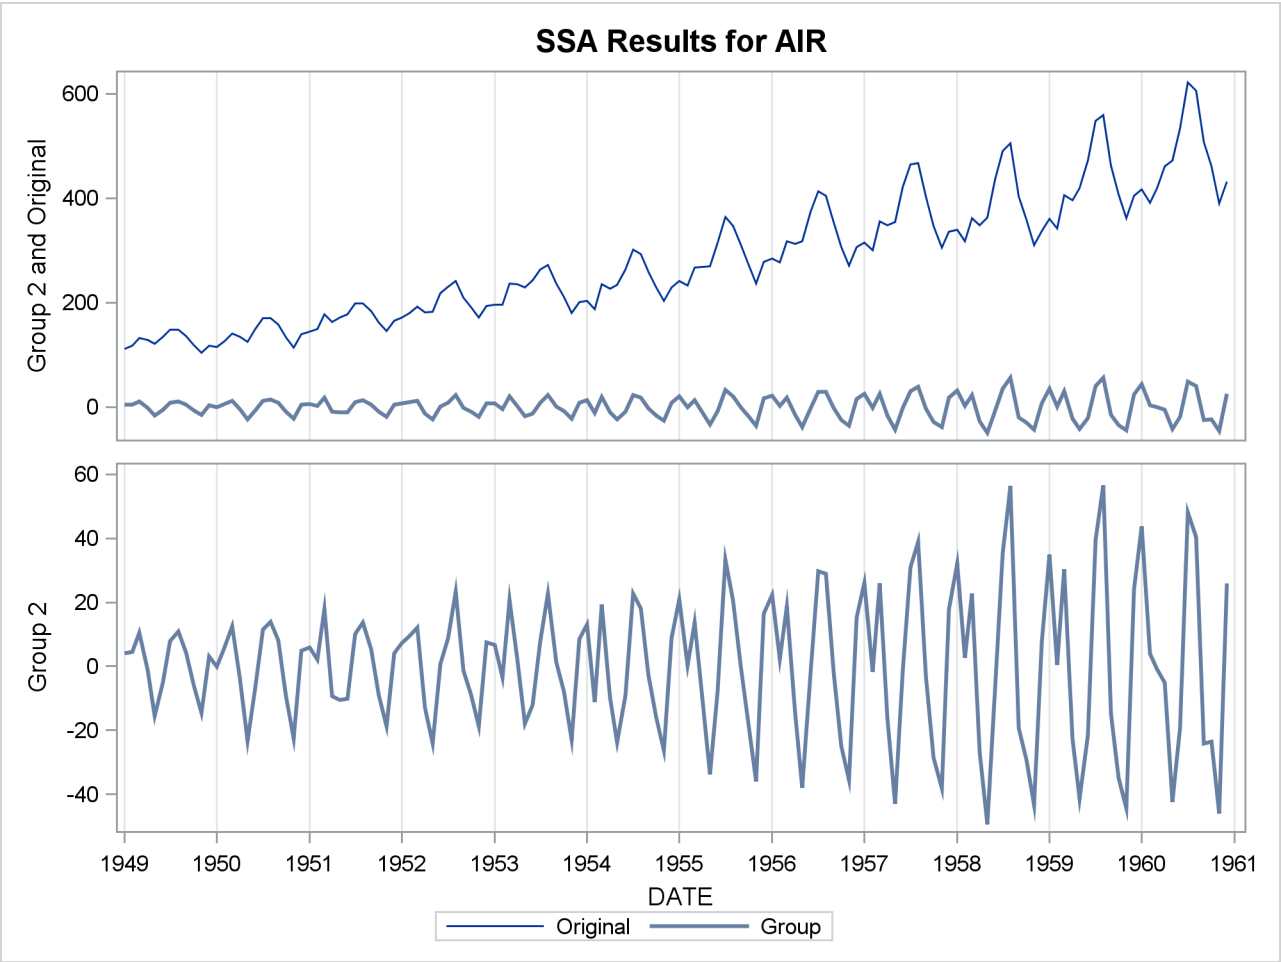
```
title "SSA of AIR data";

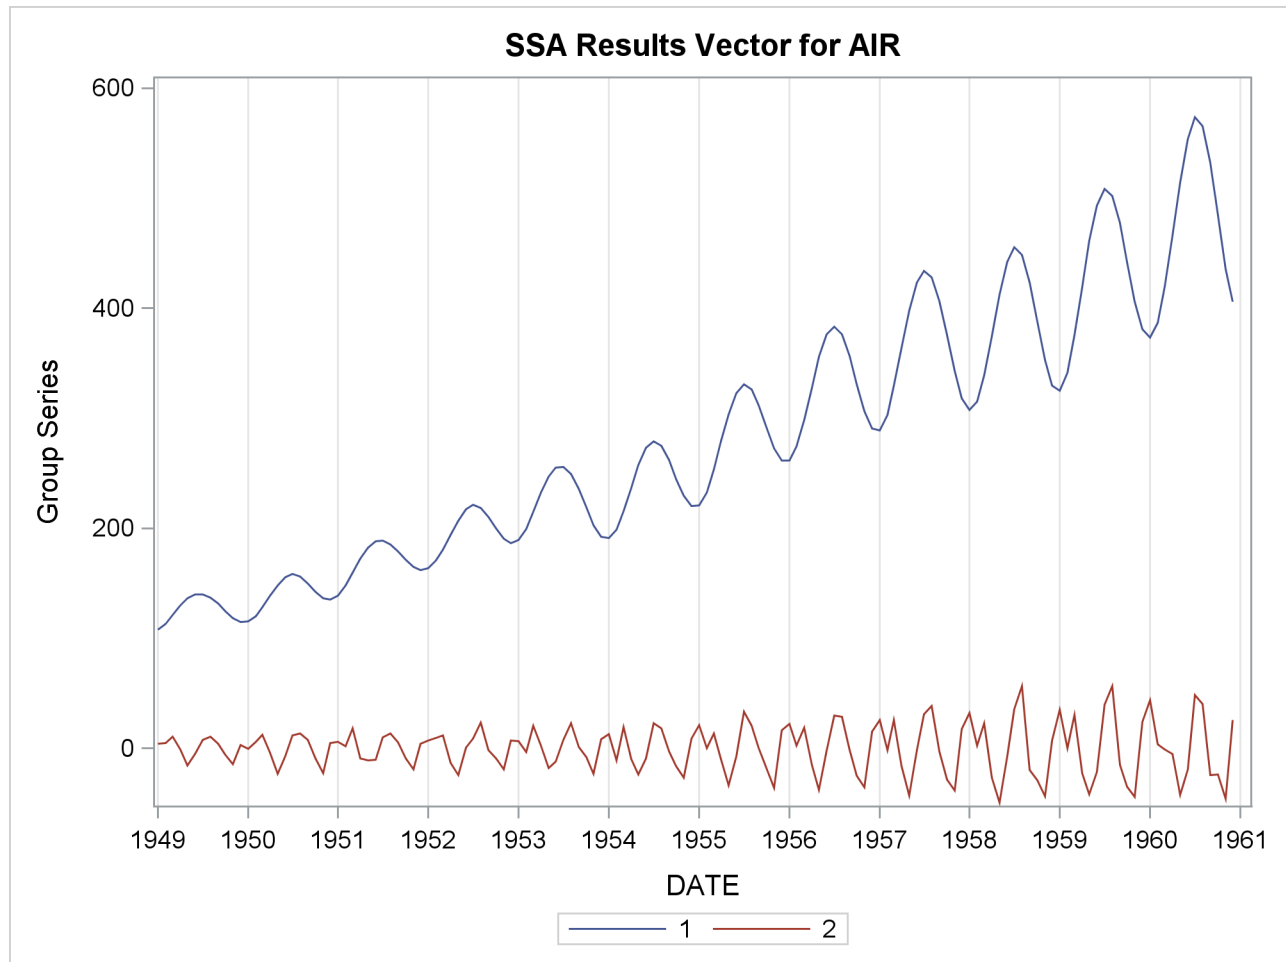
proc timeseries data=sashelp.air plot=ssa;
  id date interval=month;
  var air;
  ssa / length=12 THRESHOLDPCT=80;
run;
```


Output 32.5.1 Singular Value Grouping #1 Plot



Output 32.5.2 Singular Value Grouping #2 Plot



Output 32.5.3 Singular Value Components Plot

References

- Brockwell, P. J. and Davis, R. A. (1991), *Time Series: Theory and Models*, Second Edition, New York: Springer-Verlag, 362–365.
- Cooley, J. W. and Tukey J. W. (1965), “An Algorithm for the Machine Calculation of Complex Fourier Series,” *Mathematics of Computation*, 19, 297–301.
- Golyandina, N., Nekrutkin, V., and Zhigljavsky, A. (2001), *Analysis of Time Series Structure SSA and Related Techniques*, Boca Raton: CRC Press.
- Greene, W. H. (1999), *Econometric Analysis*, Fourth Edition, New York: Macmillan.
- Hodrick, R. and Prescott, E. (1980), “Post-War U.S. Business Cycles: An Empirical Investigation,” Discussion Paper 451, Carnegie Mellon University.

Makridakis, S. and Wheelwright, S.C. (1978), *Interactive Forecasting: Univariate and Multivariate Methods*, Second Edition, San Francisco: Holden-Day, 198–201.

Monro, D. M. and Branch, J. L. (1976), “Algorithm AS 117. The Chirp Discrete Fourier Transform of General Length,” *Applied Statistics*, 26, 351–361.

Priestley, M. B. (1981), *Spectral Analysis and Time Series*, New York: Academic Press Inc.

Pyle, D. (1999), *Data Preparation for Data Mining*, San Francisco: Morgan Kaufman Publishers, Inc.

Singleton, R. C. (1969), “An Algorithm for Computing the Mixed Radix Fast Fourier Transform,” *I.E.E.E. Transactions of Audio and Electroacoustics*, AU-17, 93–103.

Stoffer, D. S., Toloi, C. M. C. (1992), “A Note on the Ljung-Box-Pierce Portmanteau Statistic with Missing Data,” *Statistics and Probability Letters* 13, 391–396.

Wheelwright, S. C. and Makridakis, S. (1973), *Forecasting Methods for Management*, Third Edition, New York: Wiley-Interscience, 123–133.

Chapter 33

The TSCSREG Procedure

Contents

Overview: The TSCSREG Procedure	2091
Getting Started: The TSCSREG Procedure	2092
Specifying the Input Data	2092
Unbalanced Data	2092
Specifying the Regression Model	2093
Estimation Techniques	2094
Introductory Example	2095
Syntax: The TSCSREG Procedure	2097
Functional Summary	2097
PROC TSCSREG Statement	2098
BY Statement	2099
ID Statement	2099
MODEL Statement	2100
TEST Statement	2101
Details: The TSCSREG Procedure	2102
ODS Table Names	2102
Examples: The TSCSREG Procedure	2103
References: TSCSREG Procedure	2103

Overview: The TSCSREG Procedure

The TSCSREG (time series cross section regression) procedure analyzes a class of linear econometric models that commonly arise when time series and cross-sectional data are combined. The TSCSREG procedure deals with panel data sets that consist of time series observations on each of several cross-sectional units.

The TSCSREG procedure is very similar to the PANEL procedure; for full description, syntax details, models, and estimation methods, see Chapter 20, “[The PANEL Procedure](#).” The TSCSREG procedure is no longer being updated, and it shares the code base with the PANEL procedure.

The original TSCSREG procedure was developed by Douglas J. Drummond and A. Ronald Gallant, and contributed to the Version 5 SUGI Supplemental Library in 1979. The original code was changed substantially over the years. Additional new methods as well as other new features are currently included in the PANEL PROCEDURE. SAS Institute would like to thank Dr. Drummond and Dr. Gallant for their contribution of the original version of the TSCSREG procedure.

Getting Started: The TSCSREG Procedure

Specifying the Input Data

The input data set used by the TSCSREG procedure must be sorted by cross section and by time within each cross section. Therefore, the first step in using PROC TSCSREG is to make sure that the input data set is sorted. Normally, the input data set contains a variable that identifies the cross section for each observation and a variable that identifies the time period for each observation.

To illustrate, suppose that you have a data set A that contains data over time for each of several states. You want to regress the variable Y on regressors X1 and X2. Cross sections are identified by the variable STATE, and time periods are identified by the variable DATE. The following statements sort the data set A appropriately:

```
proc sort data=a;  
    by state date;  
run;
```

The next step is to invoke the TSCSREG procedure and specify the cross section and time series variables in an ID statement. List the variables in the ID statement exactly as they are listed in the BY statement.

```
proc tscsreg data=a;  
    id state date;
```

Alternatively, you can omit the ID statement and use the CS= and TS= options on the PROC TSCSREG statement to specify the number of cross sections in the data set and the number of time series observations in each cross section.

Unbalanced Data

In the case of fixed-effects and random-effects models, the TSCSREG procedure is capable of processing data with different numbers of time series observations across different cross sections. You must specify the ID statement to estimate models that use unbalanced data. The missing time series observations are recognized by the absence of time series ID variable values in some of the cross sections in the input data set. Moreover, if an observation with a particular time series ID value and cross-sectional ID value is present in the input data set, but one or more of the model variables are missing, that time series point is treated as missing for that cross section.

Specifying the Regression Model

Next, specify the linear regression model with a MODEL statement, as shown in the following statements.

```
proc tscsreg data=a;
  id state date;
  model y = x1 x2;
run;
```

The MODEL statement in PROC TSCSREG is specified like the MODEL statement in other SAS regression procedures: the dependent variable is listed first, followed by an equal sign, followed by the list of regressor variables.

The reason for using PROC TSCSREG instead of other SAS regression procedures is that you can incorporate a model for the structure of the random errors. It is important to consider what kind of error structure model is appropriate for your data and to specify the corresponding option in the MODEL statement.

The error structure options supported by the TSCSREG procedure are FIXONE, FIXTWO, RANONE, RANTWO, FULLER, PARKS, and DASILVA. See “[Details: The TSCSREG Procedure](#)” on page 2102 for more information about these methods and the error structures they assume.

By default, the two-way random-effects error model structure is used while Fuller-Battese and Wansbeek-Kapteyn methods are used for the estimation of variance components in balanced data and unbalanced data, respectively. Thus, the preceding example is the same as specifying the RANTWO option, as shown in the following statements:

```
proc tscsreg data=a;
  id state date;
  model y = x1 x2 / rantwo;
run;
```

You can specify more than one error structure option in the MODEL statement; the analysis is repeated using each method specified. You can use any number of MODEL statements to estimate different regression models or estimate the same model by using different options.

In order to aid in model specification within this class of models, the procedure provides two specification test statistics. The first is an F statistic that tests the null hypothesis that the fixed-effects parameters are all zero. The second is a Hausman m -statistic that provides information about the appropriateness of the random-effects specification. It is based on the idea that, under the null hypothesis of no correlation between the effects variables and the regressors, OLS and GLS are consistent, but OLS is inefficient. Hence, a test can be based on the result that the covariance of an efficient estimator with its difference from an inefficient estimator is zero. Rejection of the null hypothesis might suggest that the fixed-effects model is more appropriate.

The procedure also provides the Buse R-square measure, which is the most appropriate goodness-of-fit measure for models estimated by using GLS. This number is interpreted as a measure of the proportion of the transformed sum of squares of the dependent variable that is attributable to the influence of the

independent variables. In the case of OLS estimation, the Buse R-square measure is equivalent to the usual R-square measure.

Estimation Techniques

If the effects are fixed, the models are essentially regression models with dummy variables that correspond to the specified effects. For fixed-effects models, ordinary least squares (OLS) estimation is equivalent to best linear unbiased estimation.

The output from TSCSREG is identical to what one would obtain from creating dummy variables to represent the cross-sectional and time (fixed) effects. The output is presented in this manner to facilitate comparisons to the least squares dummy variables estimator (LSDV). As such, the inclusion of a intercept term implies that one dummy variable must be dropped. The actual estimation of the fixed-effects models is not LSDV. LSDV is much too cumbersome to implement. Instead, TSCSREG operates in a two step fashion. In the first step, the following occurs:

- *One-way fixed-effects model:* In the one-way fixed-effects model, the data is transformed by removing the cross-sectional means from the dependent and independent variables. The following is true:

$$\tilde{y}_{it} = y_{it} - \bar{y}_{i\cdot}$$

$$\tilde{\mathbf{x}}_{it} = \mathbf{x}_{it} - \bar{\mathbf{x}}_{i\cdot}$$

- *Two-way fixed-effects model:* In the two-way fixed-effects model, the data is transformed by removing the cross-sectional and time means and adding back the overall means:

$$\tilde{y}_{it} = y_{it} - \bar{y}_{i\cdot} - \bar{y}_{\cdot t} + \bar{\bar{y}}$$

$$\tilde{\mathbf{x}}_{it} = \mathbf{x}_{it} - \bar{\mathbf{x}}_{i\cdot} - \bar{\mathbf{x}}_{\cdot t} + \bar{\bar{\mathbf{x}}}$$

where the symbols:

y_{it} and \mathbf{x}_{it} are the dependent variable (a scalar) and the explanatory variables (a vector whose columns are the explanatory variables not including a constant), respectively

$\bar{y}_{i\cdot}$ and $\bar{\mathbf{x}}_{i\cdot}$ are cross section means

$\bar{y}_{\cdot t}$ and $\bar{\mathbf{x}}_{\cdot t}$ are time means

$\bar{\bar{y}}$ and $\bar{\bar{\mathbf{x}}}$ are the overall means

The second step consists of running OLS on the properly demeaned series, provided that the data are balanced. The unbalanced case is slightly more difficult, because the structure of the missing data must be retained. For this case, PROC TSCSREG uses a slight specialization on Wansbeek and Kapteyn.

The other alternative is to assume that the effects are random. In the one-way case, $E(v_i) = 0$, $E(v_i^2) = \sigma_v^2$, and $E(v_i v_j) = 0$ for $i \neq j$, and v_i is uncorrelated with ϵ_{it} for all i and t . In the two-way case, in addition to all of the preceding, $E(e_t) = 0$, $E(e_t^2) = \sigma_e^2$, and $E(e_t e_s) = 0$ for $t \neq s$, and the e_t are uncorrelated with

the v_i and the ϵ_{it} for all i and t . Thus, the model is a variance components model, with the variance components σ_v^2 , σ_e^2 , and σ_ϵ^2 , to be estimated. A crucial implication of such a specification is that the effects are independent of the regressors. For random-effects models, the estimation method is an estimated generalized least squares (EGLS) procedure that involves estimating the variance components in the first stage and using the estimated variance covariance matrix thus obtained to apply generalized least squares (GLS) to the data.

Introductory Example

The following example uses the cost function data from Greene (1990) to estimate the variance components model. The variable OUTPUT is the log of output in millions of kilowatt-hours, and COST is the log of cost in millions of dollars. Refer to Greene (1990) for details.

```

title1;
data greene;
    input firm year output cost @@;
    df1 = firm = 1;
    df2 = firm = 2;
    df3 = firm = 3;
    df4 = firm = 4;
    df5 = firm = 5;
    d60 = year = 1960;
    d65 = year = 1965;
    d70 = year = 1970;
datalines;

... more lines ...

```

Usually you cannot explicitly specify all the explanatory variables that affect the dependent variable. The omitted or unobservable variables are summarized in the error disturbances. The TSCSREG procedure used with the RANTWO option specifies the two-way random-effects error model where the variance components are estimated by the Fuller-Battese method, because the data are balanced and the parameters are efficiently estimated by using the GLS method. The variance components model used by the Fuller-Battese method is

$$y_{it} = \sum_{k=1}^K X_{itk} \beta_k + v_i + e_t + \epsilon_{it} \quad i = 1, \dots, N; t = 1, \dots, T$$

The following statements fit this model.

```

proc sort data=greene;
    by firm year;
run;

proc tscsreg data=greene;
    model cost = output / rantwo;
    id firm year;

```

```
run;
```

The TSCSREG procedure output is shown in Figure 33.1. A model description is printed first; it reports the estimation method used and the number of cross sections and time periods. The variance components estimates are printed next. Finally, the table of regression parameter estimates shows the estimates, standard errors, and t tests.

Figure 33.1 The Variance Components Estimates

The TSCSREG Procedure					
Fuller and Battese Variance Components (RanTwo)					
Dependent Variable: cost					
Model Description					
Estimation Method			RanTwo		
Number of Cross Sections			6		
Time Series Length			4		
Fit Statistics					
SSE	0.3481	DFE	22		
MSE	0.0158	Root MSE	0.1258		
R-Square	0.8136				
Variance Component Estimates					
Variance Component for Cross Sections			0.046907		
Variance Component for Time Series			0.00906		
Variance Component for Error			0.008749		
Hausman Test for Random Effects					
DF	m Value	Pr > m			
1	26.46	<.0001			
Parameter Estimates					
Variable	DF	Estimate	Standard Error	t Value	Pr > t
Intercept	1	-2.99992	0.6478	-4.63	0.0001
output	1	0.746596	0.0762	9.80	<.0001

Syntax: The TSCSREG Procedure

The following statements are used with the TSCSREG procedure.

```
PROC TSCSREG options ;
  BY variables ;
  ID cross-section-id-variable time-series-id-variable ;
  MODEL dependent = regressor-variables / options ;
  TEST equation1 < ,equation2... > ;
```

Functional Summary

The statements and options used with the TSCSREG procedure are summarized in the following table.

Table 33.1 Functional Summary

Description	Statement	Option
Data Set Options		
specify the input data set	TSCSREG	DATA=
write parameter estimates to an output data set	TSCSREG	OUTEST=
include correlations in the OUTEST= data set	TSCSREG	CORROUT
include covariances in the OUTEST= data set	TSCSREG	COVOUT
specify number of time series observations	TSCSREG	TS=
specify number of cross sections	TSCSREG	CS=
Declaring the Role of Variables		
specify BY-group processing	BY	
specify the cross section and time ID variables	ID	
Printing Control Options		
print correlations of the estimates	MODEL	CORRB
print covariances of the estimates	MODEL	COVB
suppress printed output	MODEL	NOPRINT
perform tests of linear hypotheses	TEST	
Model Estimation Options		
specify the one-way fixed-effects model	MODEL	FIXONE
specify the two-way fixed-effects model	MODEL	FIXTWO
specify the one-way random-effects model	MODEL	RANONE
specify the two-way random-effects model	MODEL	RANTWO
specify Fuller-Battese method	MODEL	FULLER
specify PARKS	MODEL	PARKS
specify Da Silva method	MODEL	DASILVA

Description	Statement	Option
specify order of the moving-average error process for Da Silva method	MODEL	M=
print Φ matrix for Parks method	MODEL	PHI
print autocorrelation coefficients for Parks method	MODEL	RHO
suppress the intercept term	MODEL	NOINT
control check for singularity	MODEL	SINGULAR=

PROC TSCSREG Statement

PROC TSCSREG *options* ;

The following options can be specified in the PROC TSCSREG statement.

DATA=SAS-data-set

names the input data set. The input data set must be sorted by cross section and by time period within cross section. If you omit the DATA= option, the most recently created SAS data set is used.

TS=number

specifies the number of observations in the time series for each cross section. The TS= option value must be greater than 1. The TS= option is required unless an ID statement is used. Note that the number of observations for each time series must be the same for each cross section and must cover the same time period.

CS=number

specifies the number of cross sections. The CS= option value must be greater than 1. The CS= option is required unless an ID statement is used.

OUTEST=SAS-data-set

the parameter estimates. When the OUTEST= option is not specified, the OUTEST= data set is not created.

OUTCOV

COVOUT

writes the covariance matrix of the parameter estimates to the OUTEST= data set.

OUTCORR

CORROUT

writes the correlation matrix of the parameter estimates to the OUTEST= data set.

In addition, any of the following MODEL statement options can be specified in the PROC TSCSREG statement: CORRB, COVB, FIXONE, FIXTWO, RANONE, RANTWO, FULLER, PARKS, DASILVA, NOINT, NOPRINT, M=, PHI, RHO, and SINGULAR=. When specified in the PROC

TSCSREG statement, these options are equivalent to specifying the options for every MODEL statement.

BY Statement

BY *variables* ;

A BY statement can be used with PROC TSCSREG to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the input data set must be sorted by the BY variables as well as by cross section and time period within the BY groups.

When both an ID statement and a BY statement are specified, the input data set must be sorted first with respect to BY variables and then with respect to the cross section and time series ID variables. For example,

```
proc sort data=a;
    by byvar1 byvar2 csid tsid;
run;

proc tscsreg data=a;
    by byvar1 byvar2;
    id csid tsid;
    ...
run;
```

When both a BY statement and an ID statement are used, the data set might have a different number of cross sections or a different number of time periods in each BY group. If no ID statement is used, the CS= N and TS= T options must be specified and each BY group must contain $N \times T$ observations.

ID Statement

ID *cross-section-id-variable time-series-id-variable* ;

The ID statement is used to specify variables in the input data set that identify the cross section and time period for each observation.

When an ID statement is used, the TSCSREG procedure verifies that the input data set is sorted by the cross section ID variable and by the time series ID variable within each cross section. The TSCSREG procedure also verifies that the time series ID values are the same for all cross sections.

To make sure the input data set is correctly sorted, use PROC SORT with a BY statement with the variables listed exactly as they are listed in the ID statement to sort the input data set. For example,

```
proc sort data=a;
    by csid tsid;
run;
```

```
proc tscsreg data=a;
    id csid tsid;
    ... etc. ...
run;
```

If the ID statement is not used, the TS= and CS= options must be specified on the PROC TSCSREG statement. Note that the input data must be sorted by time within cross section, regardless of whether the cross section structure is given by an ID statement or by the options TS= and CS=.

If an ID statement is specified, the time series length T is set to the minimum number of observations for any cross section, and only the first T observations in each cross section are used. If both the ID statement and the TS= and CS= options are specified, the TS= and CS= options are ignored.

MODEL Statement

MODEL *response = regressors / options ;*

The MODEL statement specifies the regression model and the error structure assumed for the regression residuals. The response variable on the left side of the equal sign is regressed on the independent variables listed after the equal sign. Any number of MODEL statements can be used. For each model statement, only one response variable can be specified on the left side of the equal sign.

The error structure is specified by the FIXONE, FIXTWO, RANONE, RANTWO, FULLER, PARKS, and DASILVA options. More than one of these options can be used, in which case the analysis is repeated for each error structure model specified.

Models can be given labels up to 32 characters in length. Model labels are used in the printed output to identify the results for different models. If no label is specified, the response variable name is used as the label for the model. The model label is specified as follows:

label: **MODEL** *response = regressors / options ;*

The following options can be specified on the MODEL statement after a slash (/).

CORRB

CORR

prints the matrix of estimated correlations between the parameter estimates.

COVB

VAR

prints the matrix of estimated covariances between the parameter estimates.

FIXONE

specifies that a one-way fixed-effects model be estimated with the one-way model that corresponds to group effects only.

FIXTWO

specifies that a two-way fixed-effects model be estimated.

RANONE

specifies that a one-way random-effects model be estimated.

RANTWO

specifies that a two-way random-effects model be estimated.

FULLER

specifies that the model be estimated by using the Fuller-Battese method, which assumes a variance components model for the error structure.

PARKS

specifies that the model be estimated by using the Parks method, which assumes a first-order autoregressive model for the error structure.

DASILVA

specifies that the model be estimated by using the Da Silva method, which assumes a mixed variance-component moving-average model for the error structure.

M=number

specifies the order of the moving-average process in the Da Silva method. The M= value must be less than $T - 1$. The default is M=1.

PHI

prints the Φ matrix of estimated covariances of the observations for the Parks method. The PHI option is relevant only when the PARKS option is used.

RHO

prints the estimated autocorrelation coefficients for the Parks method.

NOINT**NOMEAN**

suppresses the intercept parameter from the model.

NOPRINT

suppresses the normal printed output.

SINGULAR=number

specifies a singularity criterion for the inversion of the matrix. The default depends on the precision of the computer system.

TEST Statement

TEST *equation* < , *equation* ... > < / *options* > ;

The TEST statement performs F tests of linear hypotheses about the regression parameters in the preceding MODEL statement. Each equation specifies a linear hypothesis to be tested. All hypotheses in one TEST statement are tested jointly. Variable names in the equations must correspond to regressors in the preceding

MODEL statement, and each name represents the coefficient of the corresponding regressor. The keyword INTERCEPT refers to the coefficient of the intercept.

The following statements illustrate the use of the TEST statement:

```
proc tscsreg;
  model y = x1 x2 x3;
  test x1 = 0, x2 * .5 + 2 * x3 = 0;
  test_int: test intercept=0, x3 = 0;
```

Note that a test of the following form is not permitted:

```
test_bad: test x2 / 2 + 2 * x3 = 0;
```

Do not use the division sign in test/restrict statements.

Details: The TSCSREG Procedure

Models, estimators, and methods are covered in detail in Chapter 20, “The PANEL Procedure.”

ODS Table Names

PROC TSCSREG assigns a name to each table it creates. You can use these names to reference the table when you use the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

Table 33.2 ODS Tables Produced in PROC TSCSREG

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
ModelDescription	Model description	default
FitStatistics	Fit statistics	default
FixedEffectsTest	<i>F</i> test for no fixed effects	FIXONE, FIXTWO, RANONE, RANTWO
ParameterEstimates	Parameter estimates	default
CovB	Covariance of parameter estimates	COVB
CorrB	Correlations of parameter estimates	CORRB

Table 33.2 continued

ODS Table Name	Description	Option
VarianceComponents	Variance component estimates	FULLER, DASILVA, M=, RANONE, RANTWO
RandomEffectsTest	Hausman test for random effects	FULLER, DASILVA, M=, RANONE, RANTWO
AR1Estimates	First order autoregressive parameter estimates	PARKS, RHO
EstimatedPhiMatrix	Estimated phi matrix	PARKS
EstimatedAutocovariances	Estimates of autocovariances	DASILVA, M=
ODS Tables Created by the TEST Statement		
TestResults	Test results	

Examples: The TSCSREG Procedure

For examples of analysis of panel data, see Chapter 20, “The PANEL Procedure.”

References: TSCSREG Procedure

Greene, W. H. (1990), *Econometric Analysis*, First Edition, New York: Macmillan Publishing Company.

Chapter 34

The UCM Procedure

Contents

Overview: UCM Procedure	2106
Getting Started: UCM Procedure	2107
A Seasonal Series with Linear Trend	2107
Syntax: UCM Procedure	2115
Functional Summary	2115
PROC UCM Statement	2118
AUTOREG Statement	2121
BLOCKSEASON Statement	2122
BY Statement	2124
CYCLE Statement	2124
DEPLAG Statement	2125
ESTIMATE Statement	2126
FORECAST Statement	2129
ID Statement	2131
IRREGULAR Statement	2132
LEVEL Statement	2135
MODEL Statement	2136
NLOPTIONS Statement	2136
OUTLIER Statement	2137
RANDOMREG Statement	2137
SEASON Statement	2138
SLOPE Statement	2140
SPLINEREG Statement	2141
SPLINESEASON Statement	2143
Details: UCM Procedure	2144
An Introduction to Unobserved Component Models	2144
The UCMs as State Space Models	2150
Outlier Detection	2159
Missing Values	2160
Parameter Estimation	2160
Computational Issues	2161
Displayed Output	2162
Statistical Graphics	2163
ODS Table Names	2173

ODS Graph Names	2176
OUTFOR= Data Set	2180
OUTEST= Data Set	2181
Statistics of Fit	2182
Examples: UCM Procedure	2183
Example 34.1: The Airline Series Revisited	2183
Example 34.2: Variable Star Data	2189
Example 34.3: Modeling Long Seasonal Patterns	2192
Example 34.4: Modeling Time-Varying Regression Effects	2196
Example 34.5: Trend Removal Using the Hodrick-Prescott Filter	2202
Example 34.6: Using Splines to Incorporate Nonlinear Effects	2204
Example 34.7: Detection of Level Shift	2209
Example 34.8: ARIMA Modeling	2212
References	2216

Overview: UCM Procedure

The UCM procedure analyzes and forecasts equally spaced univariate time series data by using an unobserved components model (UCM). The UCMs are also called *structural models* in the time series literature. A UCM decomposes the response series into components such as trend, seasonals, cycles, and the regression effects due to predictor series. The components in the model are supposed to capture the salient features of the series that are useful in explaining and predicting its behavior. Harvey (1989) is a good reference for time series modeling that uses the UCMs. Harvey calls the components in a UCM the “stylized facts” about the series under consideration. Traditionally, the ARIMA models and, to some limited extent, the exponential smoothing models have been the main tools in the analysis of this type of time series data. It is fair to say that the UCMs capture the versatility of the ARIMA models while possessing the interpretability of the smoothing models. A thorough discussion of the correspondence between the ARIMA models and the UCMs, and the relative merits of UCM and ARIMA modeling, is given in Harvey (1989). The UCMs are also very similar to another set of models, called the *dynamic models*, that are popular in the Bayesian time series literature (West and Harrison 1999). In SAS/ETS you can use PROC ARIMA for ARIMA modeling (see Chapter 7, “[The ARIMA Procedure](#)”), PROC ESM for exponential smoothing modeling (see Chapter 14, “[The ESM Procedure](#)”), and use the Time Series Forecasting System for a point-and-click interface to ARIMA and exponential smoothing modeling.

You can use the UCM procedure to fit a wide range of UCMs that can incorporate complex trend, seasonal, and cyclical patterns and can include multiple predictors. It provides a variety of diagnostic tools to assess the fitted model and to suggest the possible extensions or modifications. The components in the UCM provide a succinct description of the underlying mechanism governing the series. You can print, save, or plot the estimates of these component series. Along with the standard forecast and residual plots, the study of these component plots is an essential part of time series analysis using the UCMs. Once a suitable UCM is found for the series under consideration, it can be used for a variety of purposes. For example, it can be used for the following:

- forecasting the values of the response series and the component series in the model
- obtaining a model-based seasonal decomposition of the series
- obtaining a “denoised” version and interpolating the missing values of the response series in the historical period
- obtaining the full sample or “smoothed” estimates of the component series in the model

Getting Started: UCM Procedure

The analysis of time series using the UCMs involves recognizing the salient features present in the series and modeling them suitably. The UCM procedure provides a variety of models for estimating and forecasting the commonly observed features in time series. These models are discussed in detail later in the section “[An Introduction to Unobserved Component Models](#)” on page 2144. First the procedure is illustrated using an example.

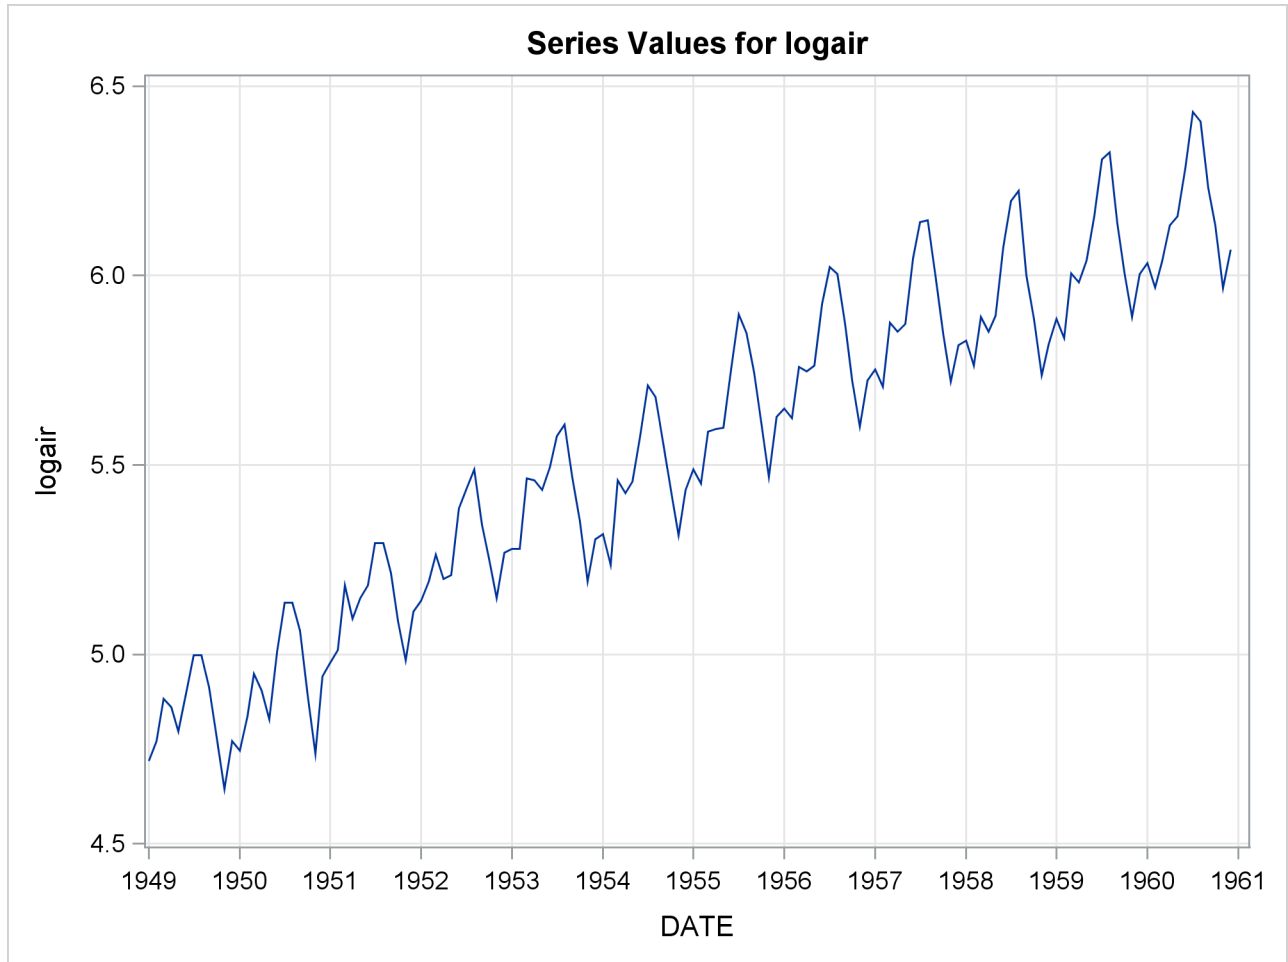
A Seasonal Series with Linear Trend

The airline passenger series, given as Series G in Box and Jenkins (1976), is often used in time series literature as an example of a nonstationary seasonal time series. This series is a monthly series consisting of the number of airline passengers who traveled during the years 1949 to 1960. Its main features are a steady rise in the number of passengers from year to year and the seasonal variation in the numbers during any given year. It also exhibits an increase in variability around the trend. A log transformation is used to stabilize this variability. The following DATA step prepares the log-transformed passenger series analyzed in this example:

```
data seriesG;
    set sashelp.air;
    logair = log( air );
run;
```

The following statements produce a time series plot of the series by using the TIMESERIES procedure (see Chapter 32, “[The TIMESERIES Procedure](#)”). The trend and seasonal features of the series are apparent in the plot in [Figure 34.1](#).

```
proc timeseries data=seriesG plot=series;
    id date interval=month;
    var logair;
run;
```

Figure 34.1 Series Plot of Log-Transformed Airline Passenger Series

In this example this series is modeled using an unobserved component model called the basic structural model (BSM). The BSM models a time series as a sum of three stochastic components: a trend component μ_t , a seasonal component γ_t , and random error ϵ_t . Formally, a BSM for a response series y_t can be described as

$$y_t = \mu_t + \gamma_t + \epsilon_t$$

Each of the stochastic components in the model is modeled separately. The random error ϵ_t , also called the *irregular component*, is modeled simply as a sequence of independent, identically distributed (i.i.d.) zero-mean Gaussian random variables. The trend and the seasonal components can be modeled in a few different ways. The model for trend used here is called a *locally linear time trend*. This trend model can be written as follows:

$$\begin{aligned}\mu_t &= \mu_{t-1} + \beta_{t-1} + \eta_t, & \eta_t &\sim i.i.d. N(0, \sigma_\eta^2) \\ \beta_t &= \beta_{t-1} + \xi_t, & \xi_t &\sim i.i.d. N(0, \sigma_\xi^2)\end{aligned}$$

These equations specify a trend where the level μ_t as well as the slope β_t is allowed to vary over time. This variation in slope and level is governed by the variances of the disturbance terms η_t and ξ_t in their respective

equations. Some interesting special cases of this model arise when you manipulate these disturbance variances. For example, if the variance of ξ_t is zero, the slope will be constant (equal to β_0); if the variance of η_t is also zero, μ_t will be a deterministic trend given by the line $\mu_0 + \beta_0 t$. The seasonal model used in this example is called a trigonometric seasonal. The stochastic equations governing a trigonometric seasonal are explained later (see the section “[Modeling Seasons](#)” on page 2146). However, it is interesting to note here that this seasonal model reduces to the familiar regression with deterministic seasonal dummies if the variance of the disturbance terms in its equations is equal to zero. The following statements specify a BSM with these three components:

```
proc ucm data=seriesG;
  id date interval=month;
  model logair;
  irregular;
  level;
  slope;
  season length=12 type=trig print=smooth;
  estimate;
  forecast lead=24 print=decomp;
run;
```

The PROC UCM statement signifies the start of the UCM procedure, and the input data set, `seriesG`, containing the dependent series is specified there. The optional `ID` statement is used to specify a date, datetime, or time identification variable, `date` in this example, to label the observations. The `INTERVAL=MONTH` option in the `ID` statement indicates that the measurements were collected on a monthly basis. The model specification begins with the `MODEL` statement, where the response series is specified (`logair` in this case). After this the components in the model are specified using separate statements that enable you to control their individual properties. The irregular component ϵ_t is specified using the `IRREGULAR` statement and the trend component μ_t is specified using the `LEVEL` and `SLOPE` statements. The seasonal component γ_t is specified using the `SEASON` statement. The specifics of the seasonal characteristics such as the season length, its stochastic evolution properties, etc., are specified using the options in the `SEASON` statement. The seasonal component used in this example has a season length of 12, corresponding to the monthly seasonality, and is of the *trigonometric* type. Different types of seasonals are explained later (see the section “[Modeling Seasons](#)” on page 2146).

The parameters of this model are the variances of the disturbance terms in the evolution equations of μ_t , β_t , and γ_t and the variance of the irregular component ϵ_t . These parameters are estimated by maximizing the likelihood of the data. The `ESTIMATE` statement options can be used to specify the span of data used in parameter estimation and to display and save the results of the estimation step and the model diagnostics. You can use the estimated model to obtain the forecasts of the series as well as the components. The options in the individual component statements can be used to display the component forecasts—for example, `PRINT=SMOOTH` option in the `SEASON` statement requests the displaying of smoothed forecasts of the seasonal component γ_t . The series forecasts and forecasts of the sum of components can be requested using the `FORECAST` statement. The option `PRINT=DECOMP` in the `FORECAST` statement requests the printing of the smoothed trend μ_t and the trend plus seasonal component ($\mu_t + \gamma_t$).

The parameter estimates for this model are displayed in [Figure 34.2](#).

Figure 34.2 BSM for the Logair Series

The UCM Procedure					
Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Irregular	Error Variance	0.00023436	0.0001079	2.17	0.0298
Level	Error Variance	0.00029828	0.0001057	2.82	0.0048
Slope	Error Variance	8.47916E-13	6.2271E-10	0.00	0.9989
Season	Error Variance	0.00000356	1.32347E-6	2.69	0.0072

The estimates suggest that except for the slope component, the disturbance variances of all the components are significant—that is, all these components are *stochastic*. The slope component, however, appears to be deterministic because its error variance is quite insignificant. It might then be useful to check if the slope component can be dropped from the model—that is, if $\beta_0 = 0$. This can be checked by examining the significance analysis table of the components given in [Figure 34.3](#).

Figure 34.3 Component Significance Analysis for the Logair Series

Significance Analysis of Components (Based on the Final State)			
Component	DF	Chi-Square	Pr > ChiSq
Irregular	1	0.08	0.7747
Level	1	117867	<.0001
Slope	1	43.78	<.0001
Season	11	507.75	<.0001

This table provides the significance of the components in the model at the end of the estimation span. If a component is deterministic, this analysis is equivalent to checking whether the corresponding regression effect is significant. However, if a component is stochastic, then this analysis pertains only to the portion of the series near the end of the estimation span. In this example the slope appears quite significant and should be retained in the model, possibly as a deterministic component. Note that, on the basis of this table, the irregular component's contribution appears insignificant toward the end of the estimation span; however, since it is a stochastic component, it cannot be dropped from the model on the basis of this analysis alone. The slope component can be made deterministic by holding the value of its error variance fixed at zero. This is done by modifying the SLOPE statement as follows:

```
slope variance=0 noest;
```

After a tentative model is fit, its adequacy can be checked by examining different goodness-of-fit measures and other diagnostic tests and plots that are based on the model residuals. Once the model appears satisfactory, it can be used for forecasting. An interesting feature of the UCM procedure is that, apart from the series forecasts, you can request the forecasts of the individual components in the model. The plots of component

forecasts can be useful in understanding their contributions to the series. The following statements illustrate some of these features:

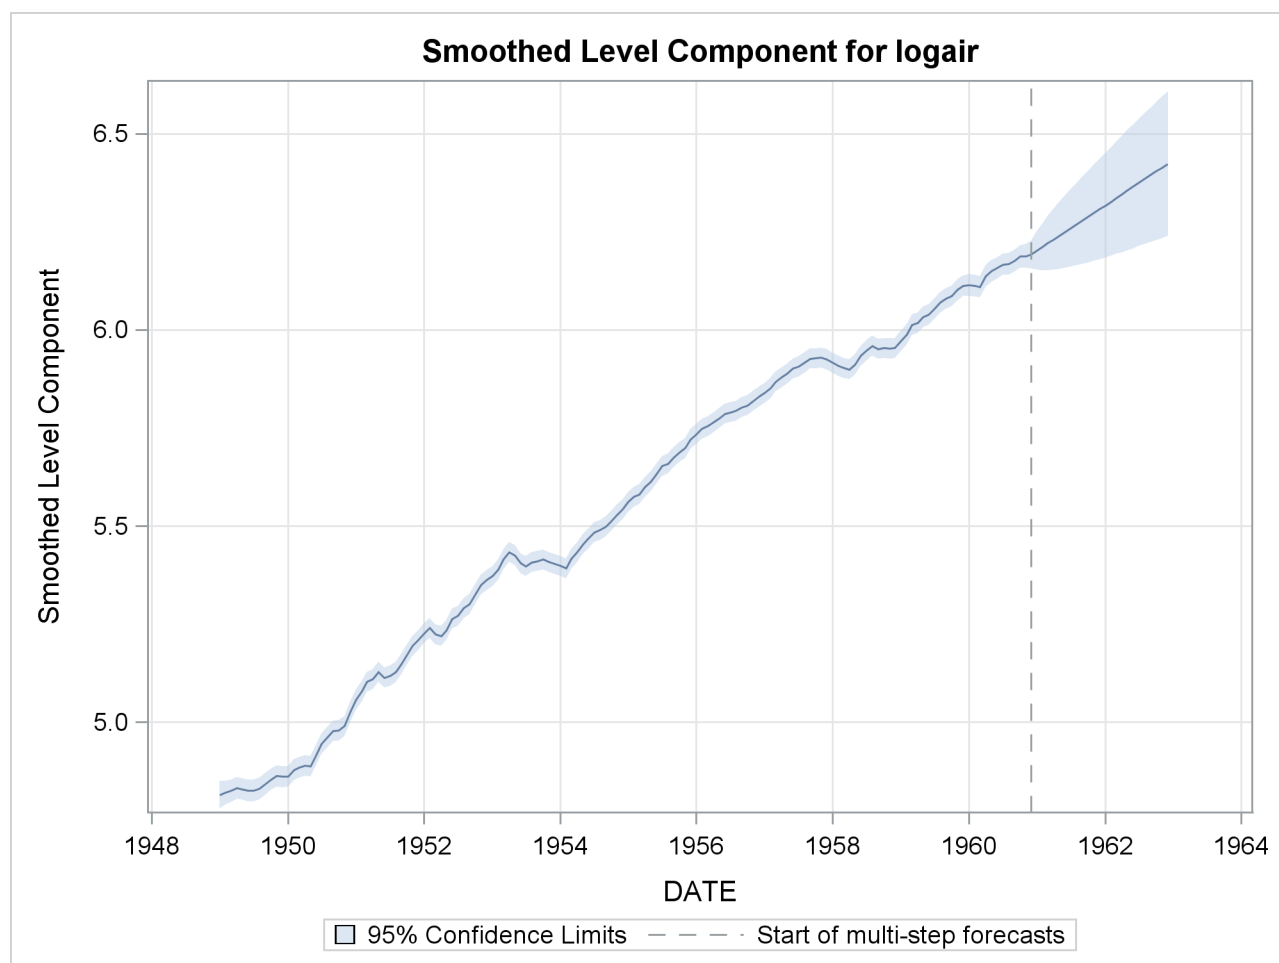
```
proc ucm data=seriesG;
  id date interval = month;
  model logair;
  irregular;
  level plot=smooth;
  slope variance=0 noest;
  season length=12 type=trig
    plot=smooth;
  estimate;
  forecast lead=24 plot=decomp;
run;
```

The table given in [Figure 34.4](#) shows the goodness-of-fit statistics that are computed by using the one-step-ahead prediction errors (see the section “[Statistics of Fit](#)” on page 2182). These measures indicate a good agreement between the model and the data. Additional diagnostic measures are also printed by default but are not shown here.

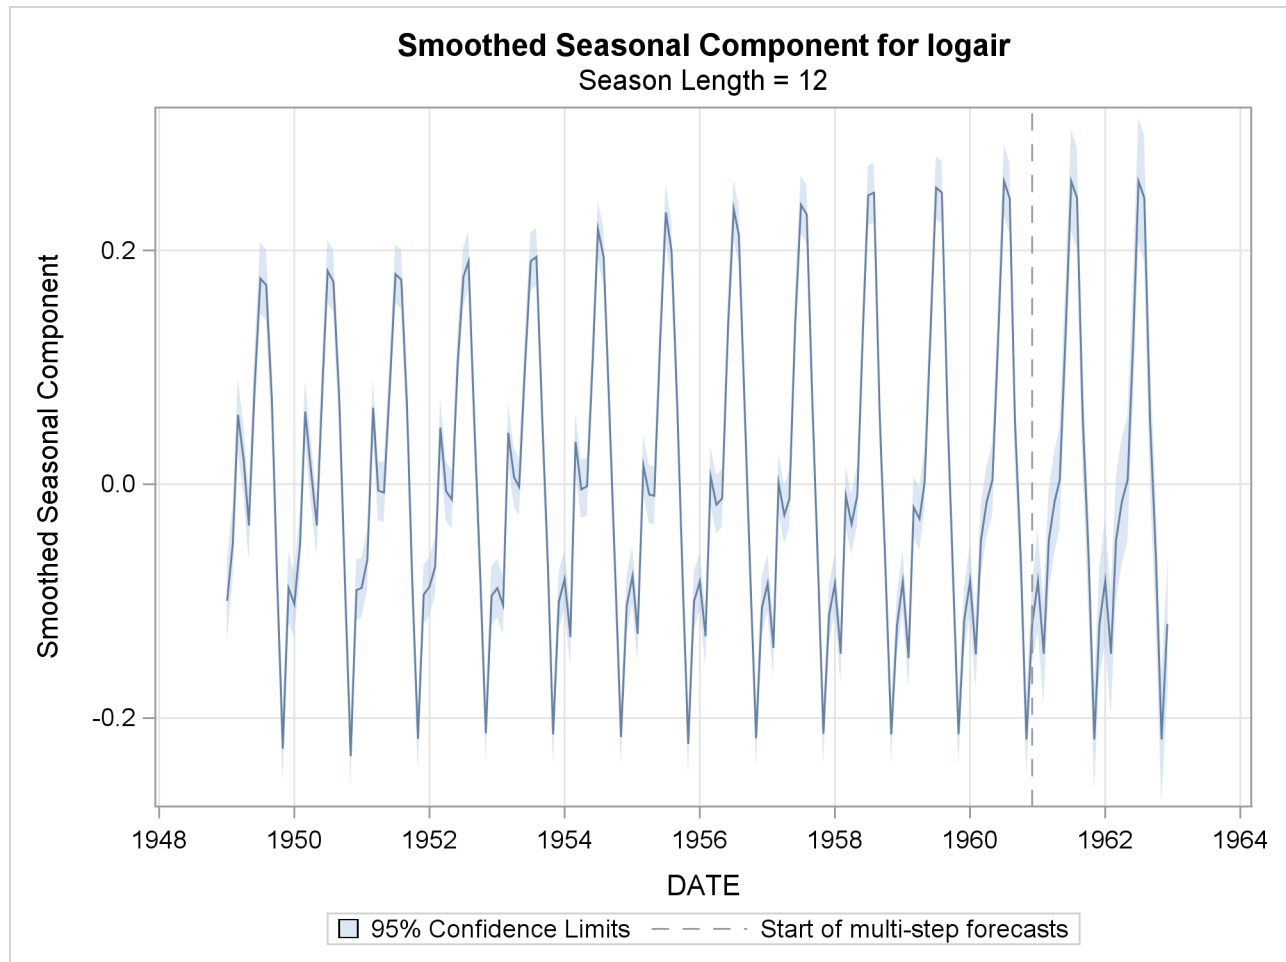
Figure 34.4 Fit Statistics for the Logair Series

The UCM Procedure	
Fit Statistics Based on Residuals	
Mean Squared Error	0.00147
Root Mean Squared Error	0.03830
Mean Absolute Percentage Error	0.54132
Maximum Percent Error	2.19097
R-Square	0.99061
Adjusted R-Square	0.99046
Random Walk R-Square	0.87288
Amemiya's Adjusted R-Square	0.99017
Number of non-missing residuals used for computing the fit statistics = 131	

The first plot, shown in [Figure 34.5](#), is produced by the PLOT=SMOOTH option in the LEVEL statement, it shows the smoothed level of the series.

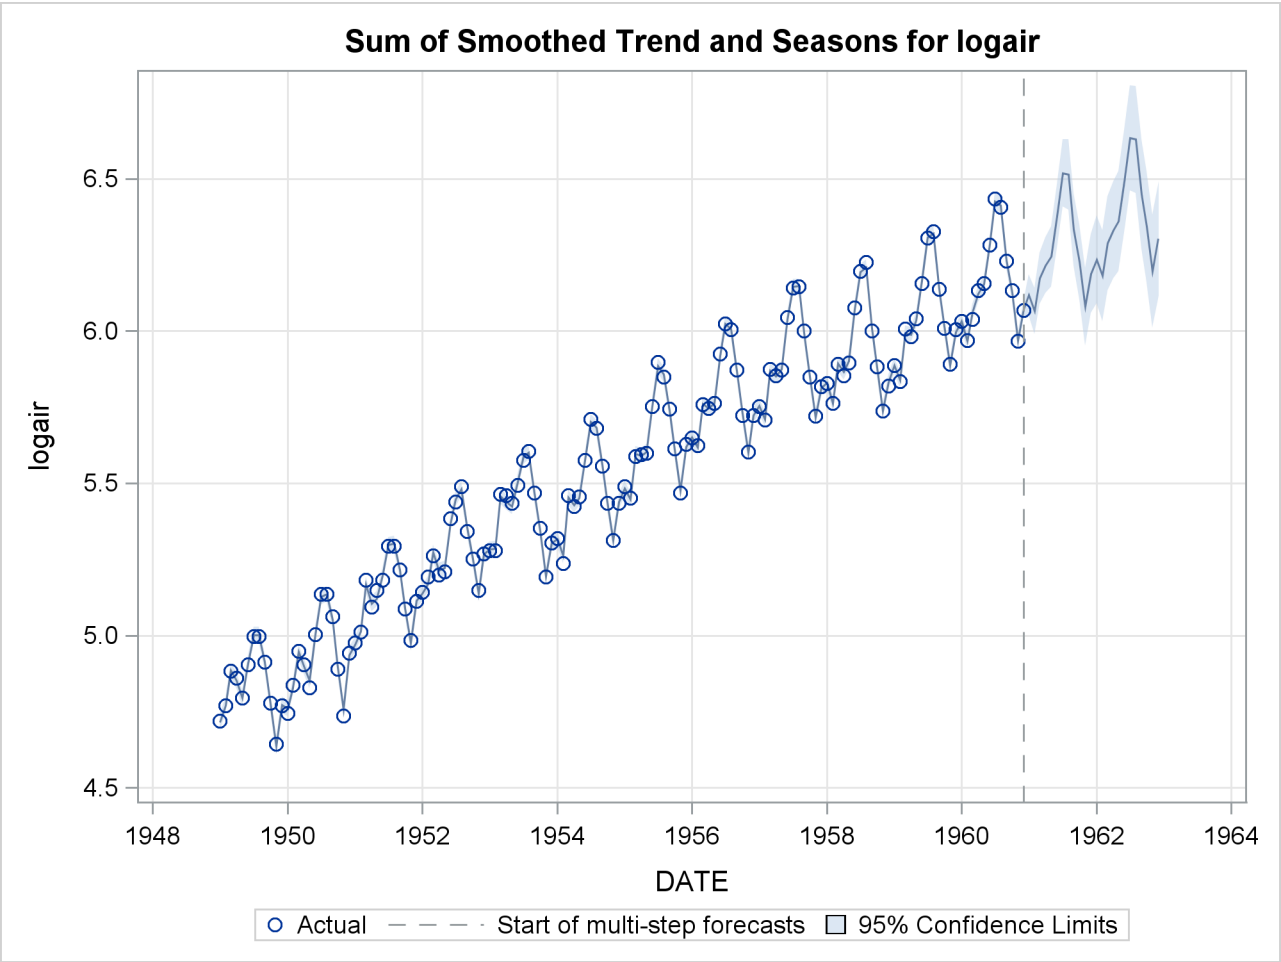
Figure 34.5 Smoothed Trend in the Logair Series

The second plot (Figure 34.6), produced by the PLOT=SMOOTH option in the SEASON statement, shows the smoothed seasonal component by itself.

Figure 34.6 Smoothed Seasonal in the Logair Series

The plot of the sum of the trend and seasonal component, produced by the `PLOT=DECOMP` option in the `FORECAST` statement, is shown in [Figure 34.7](#). You can see that, at least visually, the model seems to fit the data well. In all these decomposition plots the component estimates are extrapolated for two years in the future based on the `LEAD=24` option specified in the `FORECAST` statement.

Figure 34.7 Smoothed Trend plus Seasonal in the Logair Series



Syntax: UCM Procedure

The UCM procedure uses the following statements:

```

PROC UCM < options > ;
  AUTOREG < options > ;
  BLOCKSEASON options ;
  BY variables ;
  CYCLE < options > ;
  DEPLAG options ;
  ESTIMATE < options > ;
  FORECAST < options > ;
  ID variable options ;
  IRREGULAR < options > ;
  LEVEL < options > ;
  MODEL dependent variable < = regressors > ;
  NLOPTIONS options ;
  OUTLIER options ;
  RANDOMREG regressors < / options > ;
  SEASON options ;
  SLOPE < options > ;
  SPLINEREG regressor < options > ;
  SPLINESEASON options ;

```

The **PROC UCM** and **MODEL** statements are required. In addition, the model must contain at least one component with nonzero disturbance variance.

Functional Summary

The statements and options controlling the UCM procedure are summarized in the following table. Most commonly needed scenarios are listed; see the individual statements for additional details. You can use the **PRINT=** and **PLOT=** options in the individual component statements for printing and plotting the corresponding component forecasts.

Table 34.1 Functional Summary

Description	Statement	Option
Data Set Options		
specify the input data set	PROC UCM	DATA=
write parameter estimates to an output data set	ESTIMATE	OUTEST=
write series and component forecasts to an output data set	FORECAST	OUTFOR=

Table 34.1 *continued*

Description	Statement	Option
Model Specification		
specify the dependent variable and simple predictors	MODEL	
specify predictors with time-varying coefficients	RANDOMREG	
specify a nonlinear predictor	SPLINEREG	
specify the irregular component	IRREGULAR	
specify the random walk trend	LEVEL	
specify the locally linear trend	LEVEL and SLOPE	
specify a cycle component	CYCLE	
specify a dummy seasonal component	SEASON	TYPE=DUMMY
specify a trigonometric seasonal component	SEASON	TYPE=TRIG
drop some harmonics from a trigonometric seasonal component	SEASON	DROPH=
specify a list of harmonics to keep in a trigonometric seasonal component	SEASON	KEEPH=
specify a spline-season component	SPLINESEASON	
specify a block-season component	BLOCKSEASON	
specify an autoreg component	AUTOREG	
specify the lags of the dependent variable	DEPLAG	
Controlling the Likelihood Optimization Process		
request optimization of the profile likelihood	ESTIMATE	PROFILE
request optimization of the usual likelihood	ESTIMATE	NOPROFILE
specify the optimization technique	NLOPTIONS	TECH=
limit the number of iterations	NLOPTIONS	MAXITER=
Outlier Detection		
turn on the search for additive outliers		Default
turn on the search for level shifts	LEVEL	CHECKBREAK
specify the significance level for outlier tests	OUTLIER	ALPHA=
limit the number of outliers	OUTLIER	MAXNUM=
limit the number of outliers to a percentage of the series length	OUTLIER	MAXPCT=
Controlling the Series Span		
exclude some initial observations from analysis during the parameter estimation	ESTIMATE	SKIPFIRST=
exclude some observations at the end from analysis during the parameter estimation	ESTIMATE	BACK=
exclude some initial observations from analysis during forecasting	FORECAST	SKIPFIRST=
exclude some observations at the end from analysis during forecasting	FORECAST	BACK=

Table 34.1 *continued*

Description	Statement	Option
Graphical Residual Analysis		
get a panel of plots consisting of residual auto-correlation plots and residual normality plots	ESTIMATE	PLOT=PANEL
get the residual CUSUM plot	ESTIMATE	PLOT=CUSUM
get the residual cumulative sum of squares plot	ESTIMATE	PLOT=CUSUMSQ
get a plot of p -values for the portmanteau white noise test	ESTIMATE	PLOT=WN
get a time series plot of residuals with overlaid LOESS smoother	ESTIMATE	PLOT=LOESS
Series Decomposition and Forecasting		
specify the number of periods to forecast in the future	FORECAST	LEAD=
specify the significance level of the forecast confidence interval	FORECAST	ALPHA=
request printing of smoothed series decomposition	FORECAST	PRINT=DECOMP
request printing of one-step-ahead and multi step-ahead forecasts	FORECAST	PRINT=FORECASTS
request plotting of smoothed series decomposition	FORECAST	PLOT=DECOMP
request plotting of one-step-ahead and multi step-ahead forecasts	FORECAST	PLOT=FORECASTS
BY Groups		
specify BY group processing	BY	
Global Printing and Plotting Options		
turn off all the printing for the procedure	PROC UCM	NOPRINT
turn on all the printing options for the procedure	PROC UCM	PRINTALL
turn off all the plotting for the procedure	PROC UCM	PLOTS=NONE
turn on all the plotting options for the procedure	PROC UCM	PLOTS=ALL
turn on a variety of plotting options for the procedure	PROC UCM	PLOTS=
ID		
specify a variable that provides the time index for the series values	ID	

PROC UCM Statement

PROC UCM *< options >* ;

The PROC UCM statement is required. The following options can be used in the PROC UCM statement:

DATA=SAS-data-set

specifies the name of the SAS data set containing the time series. If the DATA= option is not specified in the PROC UCM statement, the most recently created SAS data set is used.

NOPRINT

turns off all the printing for the procedure. The subsequent print options in the procedure are ignored.

PLOTS*< (global-plot-options) > < = plot-request < (options) > >*

PLOTS*< (global-plot-options) > < = (plot-request < (options) > < ... plot-request < (options) > > >*

controls the plots produced with ODS Graphics. When you specify only one plot request, you can omit the parentheses around the plot request.

Here are some examples:

```
plots=none
plots=all
plots=residuals(acf loess)
plots(noclm)=(smooth(decomp) residual(panel loess))
```

For general information about ODS Graphics, see Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*).

```
proc ucm;
  model y = x;
  irregular;
  level;
run;

proc ucm plots=all;
  model y = x;
  irregular;
  level;
run;
```

The first PROC UCM step does not specify the PLOTS= option, so the default plot that displays the series forecasts in the forecast region is produced. The PLOTS=ALL option in the second PROC UCM step produces all the plots that are appropriate for the specified model.

In addition to the PLOTS= option in the PROC UCM statement, you can request plots by using the PLOT= option in other statements of the UCM procedure. This way of requesting plots provides finer control over the plot production. If you do not specify any specific plot request, then PROC UCM produces the plot of series forecasts in the forecast horizon by default.

Global Plot Options:

The *global-plot-options* apply to all relevant plots generated by the UCM procedure. The following *global-plot-option* is supported:

NOCLM

suppresses the confidence limits in all the component and forecast plots.

Specific Plot Options:

The following list describes the specific plots and their options:

ALL

produces all plots appropriate for the particular analysis.

NONE

suppresses all plots.

FILTER (< filter-plot-options >)

produces time series plots of the filtered component estimates. The following *filter-plot-options* are available:

ALL

produces all the filtered component estimate plots appropriate for the particular analysis.

LEVEL

produces a time series plot of the filtered level component estimate, provided the model contains the level component.

SLOPE

produces a time series plot of the filtered slope component estimate, provided the model contains the slope component.

CYCLE

produces time series plots of the filtered cycle component estimates for all cycle components in the model, if there are any.

SEASON

produces time series plots of the filtered season component estimates for all seasonal components in the model, if there are any.

DECOMP

produces time series plots of the filtered estimates of the series decomposition.

RESIDUAL (< residual-plot-options >)

produces the residuals plots. The following *residual-plot-options* are available:

ALL

produces all the residual diagnostics plots appropriate for the particular analysis.

ACF

produces the autocorrelation plot of residuals.

CUSUM

produces the plot of cumulative residuals against time.

CUSUMSQ

produces the plot of cumulative squared residuals against time.

HISTOGRAM

produces the histogram of residuals.

LOESS

produces a scatter plot of residuals against time, which has an overlaid loess-fit.

PACF

produces the partial-autocorrelation plot of residuals.

PANEL

produces a summary panel of the residual diagnostics consisting of the following:

- histogram of residuals
- normal quantile plot of residuals
- the residual-autocorrelation-plot
- the residual-partial-autocorrelation-plot

QQ

produces a normal quantile plot of residuals.

RESIDUAL

produces a needle plot of residuals against time.

WN

produces the plot of Ljung-Box white-noise test p -values at different lags (in log scale).

SMOOTH (< *smooth-plot-options* >)

produces time series plots of the smoothed component estimates. The following *smooth-plot-options* are available:

ALL

produces all the smoothed component estimate plots appropriate for the particular analysis.

LEVEL

produces time series plot of the smoothed level component estimate, provided the model contains the level component.

SLOPE

produces time series plot of the smoothed slope component estimate, provided the model contains the slope component.

CYCLE

produces time series plots of the smoothed cycle component estimates for all cycle components in the model, if there are any.

SEASON

produces time series plots of the smoothed season component estimates for all season components in the model, if there are any.

DECOMP

produces time series plots of the smoothed estimates of the series decomposition.

PRINTALL

turns on all the printing options for the procedure. The subsequent NOPRINT options in the procedure are ignored.

AUTOREG Statement

AUTOREG <options> ;

The AUTOREG statement specifies an autoregressive component in the model. An autoregressive component is a special case of cycle that corresponds to the frequency of zero or π . It is modeled separately for easier interpretation. A stochastic equation for an autoregressive component r_t can be written as follows:

$$r_t = \rho r_{t-1} + v_t, \quad v_t \sim i.i.d. \ N(0, \sigma_v^2)$$

The damping factor ρ can take any value in the interval $(-1, 1)$, including -1 but excluding 1 . If $\rho = 1$, the autoregressive component cannot be distinguished from the random walk level component. If $\rho = -1$, the autoregressive component corresponds to a seasonal component with a season length of 2, or a nonstationary cycle with period 2. If $|\rho| < 1$, then the autoregressive component is stationary. The following example illustrates the AUTOREG statement. This statement includes an autoregressive component in the model. The damping factor ρ and the disturbance variance σ_v^2 are estimated from the data.

autoreg;

NOEST=RHO

NOEST=VARIANCE

NOEST=(RHO VARIANCE)

fixes the values of ρ and σ_v^2 to those specified in the **RHO=** and **VARIANCE=** options.

PLOT=FILTER**PLOT=SMOOTH****PLOT=(< FILTER > < SMOOTH >)**

requests plotting of the filtered or smoothed estimate of the autoreg component.

PRINT=FILTER**PRINT=SMOOTH****PRINT=(< FILTER > < SMOOTH >)**

requests printing of the filtered or smoothed estimate of the autoreg component.

RHO=valuespecifies an initial value for the damping factor ρ during the parameter estimation process. The value of ρ must be in the interval $(-1, 1)$, including -1 but excluding 1 .**VARIANCE=value**specifies an initial value for the disturbance variance σ_v^2 during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

BLOCKSEASON Statement

BLOCKSEASON *NBLOCKS* = integer *BLOCKSIZE* = integer < options > ;

The **BLOCKSEASON** or **BLOCKSEASONAL** statement is used to specify a seasonal component γ_t that has a special block structure. The seasonal γ_t is called a *block seasonal* of block size m and number of blocks k if its season length, s , can be factored as $s = m * k$ and its seasonal effects have a block form—that is, the first m seasonal effects are all equal to some number τ_1 , the next m effects are all equal to some number τ_2 , and so on.

This type of seasonal structure can be appropriate in some cases; for example, consider a series that is recorded on an hourly basis. Further assume that, in this particular case, the hour-of-the-day effect and the day-of-the-week effect are additive. In this situation the hour-of-the-week seasonality, having a season length of 168, can be modeled as a sum of two components. The hour-of-the-day effect is modeled using a simple seasonal of season length 24, while the day-of-the-week is modeled as a block seasonal component that has the days of the week as blocks. This day-of-the-week block seasonal component has seven blocks, each of size 24.

A block seasonal specification requires, at the minimum, the block size m and the number of blocks in the seasonal k . These are specified using the **BLOCKSIZE=** and **NBLOCKS=** option, respectively. In addition, you might need to specify the position of the first observation of the series by using the **OFFSET=** option if it is not at the beginning of one of the blocks. In the example just considered, this corresponds to a situation where the first series measurement is not at the start of the day. Suppose that the first measurement of the series corresponds to the hour between 6:00 and 7:00 a.m., which is the seventh hour within that day or at the seventh position within that block. This is specified as **OFFSET=7**.

The other options in this statement are very similar to the options in the **SEASON** statement; for example, a block seasonal can also be of one of the two types, **DUMMY** and **TRIG**. There can be more than one block seasonal component in the model, each specified using a separate **BLOCKSEASON** statement. No

two block seasonals in the model can have the same NBLOCKS= and BLOCKSIZE= specifications. The following example illustrates the use of the BLOCKSEASON statement to specify the additive, hour-of-the-week seasonal model:

```
season length=24 type=trig;
blockseason nblocks=7 blocksize=24;
```

BLOCKSIZE=integer

specifies the block size, m . This is a required option in this statement. The block size can be any integer larger than or equal to two. Typical examples of block sizes are 24, corresponding to the hours of the day when a day is being used as a block in hourly data, or 60, corresponding to the minutes in an hour when an hour is being used as a block in data recorded by minutes, etc.

NBLOCKS=integer

specifies the number of blocks, k . This is a required option in this statement. The number of blocks can be any integer greater than or equal to two.

NOEST

fixes the value of the disturbance variance parameter to the value specified in the **VARIANCE=** option.

OFFSET=integer

specifies the position of the first measurement within the block, if the first measurement is not at the start of a block. The OFFSET= value must be between one and the block size. The default value is one. The first measurement refers to the start of the estimation span and the forecast span. If these spans differ, their starting measurements must be separated by an integer multiple of the block size.

PLOT=FILTER

PLOT=SMOOTH

PLOT=F_ANNUAL

PLOT=S_ANNUAL

PLOT=(<plot request> ... <plot request>)

requests plots of the season component. When you specify only one plot request, you can omit the parentheses around the plot request. You can use the FILTER and SMOOTH options to plot the filtered and smoothed estimates of the season component γ_t . You can use the F_ANNUAL and S_ANNUAL options to get the plots of “annual” variation in the filtered and smoothed estimates of γ_t . The annual plots are useful to see the change in the contribution of a particular month over the span of years. Here “month” and “year” are generic terms that change appropriately with the interval type being used to label the observations and the season length. For example, for monthly data with a season length of 12, the usual meaning applies, while for daily data with a season length of 7, the days of the week serve as months and the weeks serve as years. The first period in each block is plotted over the years.

PRINT=FILTER

PRINT=SMOOTH

PRINT=(<FILTER> <SMOOTH>)

requests the printing of the filtered or smoothed estimate of the block seasonal component γ_t .

TYPE=DUMMY | TRIG

specifies the type of the block seasonal component. The default type is DUMMY.

VARIANCE=value

specifies an initial value for the disturbance variance, σ_{ω}^2 , in the γ_t equation at the start of the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

BY Statement

BY variables ;

A BY statement can be used in the UCM procedure to process a data set in groups of observations defined by the BY variables. The model specified using the MODEL and other component statements is applied to all the groups defined by the BY variables. When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables. The variables are one or more variables in the input data set.

CYCLE Statement

CYCLE < options > ;

The CYCLE statement is used to specify a cycle component, ψ_t , in the model. The stochastic equation governing a cycle component of period p and damping factor ρ is as follows

$$\begin{bmatrix} \psi_t \\ \psi_t^* \end{bmatrix} = \rho \begin{bmatrix} \cos \lambda & \sin \lambda \\ -\sin \lambda & \cos \lambda \end{bmatrix} \begin{bmatrix} \psi_{t-1} \\ \psi_{t-1}^* \end{bmatrix} + \begin{bmatrix} v_t \\ v_t^* \end{bmatrix}$$

where v_t and v_t^* are independent, zero-mean, Gaussian disturbances with variance σ_v^2 and $\lambda = 2 * \pi / p$ is the angular frequency of the cycle. Any p strictly greater than two is an admissible value for the period, and the damping factor ρ can be any value in the interval (0, 1), including one but excluding zero. The cycles with frequency zero and π , which correspond to the periods equal to infinity and two, respectively, can be specified using the AUTOREG statement. The values of ρ less than one give rise to a stationary cycle, while $\rho = 1$ gives rise to a nonstationary cycle. As a default, values of ρ , p , and σ_v^2 are estimated from the data. However, if necessary, you can fix the values of some or all of these parameters.

There can be multiple cycles in a model, each specified using a separate CYCLE statement. The examples that follow illustrate the use of the CYCLE statement.

The following statements request including two cycles in the model. The parameters of each of these cycles are estimated from the data.

```
cycle;
cycle;
```

The following statement requests inclusion of a nonstationary cycle in the model. The cycle period p and the disturbance variance σ_v^2 are estimated from the data.

```
cycle rho=1 noest=rho;
```

In the following statement a nonstationary cycle with a fixed period of 12 is specified. Moreover, a starting value is supplied for σ_v^2 .

```
cycle period=12 rho=1 variance=4 noest=(rho period);
```

NOEST=PERIOD

NOEST=RHO

NOEST=VARIANCE

NOEST=(< RHO > < PERIOD > < VARIANCE >)

fixes the values of the component parameters to those specified in the **RHO=**, **PERIOD=**, and **VARIANCE=** options. This option enables you to fix any combination of parameter values.

PERIOD=value

specifies an initial value for the cycle period during the parameter estimation process. Period value must be strictly greater than 2.

PLOT=FILTER

PLOT=SMOOTH

PLOT=(< FILTER > < SMOOTH >)

requests plotting of the filtered or smoothed estimate of the cycle component.

PRINT=FILTER

PRINT=SMOOTH

PRINT=(< FILTER > < SMOOTH >)

requests the printing of a filtered or smoothed estimate of the cycle component ψ_t .

RHO=value

specifies an initial value for the damping factor in this component during the parameter estimation process. Any value in the interval (0, 1), including one but excluding zero, is an acceptable initial value for the damping factor.

VARIANCE=value

specifies an initial value for the disturbance variance parameter, σ_v^2 , to be used during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

DEPLAG Statement

DEPLAG LAGS = order < PHI = value ... > < NOEST > ;

The DEPLAG statement is used to specify the lags of the dependent variable to be included as predictors in the model. The following examples illustrate the use of DEPLAG statement.

If the dependent series is denoted by y_t , the following statement specifies the inclusion of $\phi_1 y_{t-1} + \phi_2 y_{t-2}$ in the model. The parameters ϕ_1 and ϕ_2 are estimated from the data.

```
deplag lags=2;
```

The following statement requests including $\phi_1 y_{t-1} + \phi_2 y_{t-4} - \phi_1 \phi_2 y_{t-5}$ in the model. The values of ϕ_1 and ϕ_2 are fixed at 0.8 and -1.2.

```
deplag lags=(1) (4) phi=0.8 -1.2 noest;
```

The dependent lag parameters are not constrained to lie in any particular region. In particular, this implies that a UCM that contains only an irregular component and dependent lags, resulting in a traditional autoregressive model, is not constrained to be a stationary model. In the DEPLAG statement, if an initial value is supplied for any one of the parameters, the initial values must also be supplied for all other parameters.

LAGS=order

LAGS=(lag, ..., lag) ... (lag, ..., lag)

is a required option in this statement. $\text{LAGS}=(l_1, l_2, \dots, l_k)$ defines a model with specified lags of the dependent variable included as predictors. $\text{LAGS}=order$ is equivalent to $\text{LAGS}=(1, 2, \dots, order)$.

A concatenation of parenthesized lists specifies a factored model. For example, $\text{LAGS}=(1)(12)$ specifies that the lag values, 1, 12, and 13, corresponding to the following polynomial in the backward shift operator, be included in the model

$$(1 - \phi_{1,1}B)(1 - \phi_{2,1}B^{12})$$

Note that, in this case, the coefficient of the thirteenth lag is constrained to be the product of the coefficients of the first and twelfth lags.

NOEST

fixes the values of the parameters to those specified in **PHI=** option.

PHI=value ...

lists starting values for the coefficients of the lagged dependent variable. The order of the values listed corresponds with the order of the lags specified in the **LAGS=** option.

ESTIMATE Statement

```
ESTIMATE <options>;
```

The ESTIMATE statement is an optional statement used to control the overall model-fitting environment. Using this statement, you can control the span of observations used to fit the model by using the **SKIPFIRST=** and **BACK=** options. This can be useful in model diagnostics. You can request a variety of goodness-of-fit statistics and other model diagnostic information including different residual diagnostic plots. Note that the ESTIMATE statement is not used to control the nonlinear optimization process itself. That is done using the **NLOPTIONS** statement, where you can control the number of iterations, choose between the different optimization techniques, and so on. You can save the estimated parameters and other

related information in a data set by using the `OUTEST=` option. You can request the optimization of the profile likelihood, the likelihood obtained by concentrating out a disturbance variance, for parameter estimation by using the [PROFILE](#) option. The following example illustrates the use of this statement:

```
estimate skipfirst=12 back=24;
```

This statement requests that the initial 12 measurements and the last 24 measurements be excluded during the model-fitting process. The actual observation span used to fit the model is decided as follows: Suppose that n_0 and n_1 are the observation numbers of the first and the last nonmissing values of the response variable, respectively. As a result of `SKIPFIRST=12` and `BACK=24`, the measurements between observation numbers $n_0 + 12$ and $n_1 - 24$ form the estimation span. Of course, the model fitting might not take place if there are insufficient data in the resulting span. The model fitting does not take place if there are regressors in the model that have missing values in the estimation span.

BACK=integer

SKIPLAST=integer

indicates that some ending part of the data needs to be ignored during the parameter estimation. This can be useful when you want to study the forecasting performance of a model on the observed data. `BACK=10` results in skipping the last 10 measurements of the response series during the parameter estimation. The default is `BACK=0`.

EXTRADIFFUSE=k

enables continuation of the diffuse filtering iterations for k additional iterations beyond the first instance where the initialization of the diffuse state would have otherwise taken place. If the specified k is larger than the sample size, the diffuse iterations continue until the end of the sample. Note that one-step-ahead residuals are produced only after the diffuse state is initialized. Delaying the initialization leads to a reduction in the number of one-step-ahead residuals available for computing the residual diagnostic measures. This option is useful when you want to ignore the first few one-step-ahead residuals that often have large variance.

NOPROFILE

requests that the usual likelihood be optimized for parameter estimation. For more information, see the section [“Parameter Estimation by Profile Likelihood Optimization”](#) on page 2160.

OUTEST=SAS-data-set

specifies an output data set for the estimated parameters.

In the `ESTIMATE` statement, the `PLOT=` option is used to obtain different residual diagnostic plots. The different possibilities are as follows:

PLOT=ACF**PLOT=MODEL****PLOT=LOESS****PLOT=HISTOGRAM****PLOT=PACF****PLOT=PANEL****PLOT=QQ****PLOT=RESIDUAL****PLOT=WN****PLOT=(<plot request> ... <plot request>)**

requests different residual diagnostic plots. The different options are as follows:

ACF

produces the residual-autocorrelation plot.

CUSUM

produces the plot of cumulative residuals against time.

CUSUMSQ

produces the plot of cumulative squared residuals against time.

MODEL

produces the plot of one-step-ahead forecasts in the estimation span.

HISTOGRAM

produces the histogram of residuals.

LOESS

produces a scatter plot of residuals against time, which has an overlaid loess-fit.

PACF

produces the residual-partial-autocorrelation plot.

PANEL

produces a summary panel of the residual diagnostics consisting of

- histogram of residuals
- normal quantile plot of residuals
- the residual-autocorrelation-plot
- the residual-partial-autocorrelation-plot

QQ

produces a normal quantile plot of residuals.

RESIDUAL

produces a needle plot of residuals against time.

WN

produces a plot of p -values, in log-scale, at different lags for the Ljung-Box portmanteau white noise test statistics.

PRINT=NONE

suppresses all the printed output related to the model fitting, such as the parameter estimates, the goodness-of-fit statistics, and so on.

PROFILE

requests that the profile likelihood, obtained by concentrating out one of the disturbance variances from the likelihood, be optimized for parameter estimation. By default, the profile likelihood is not optimized if any of the disturbance variance parameters is held fixed to a nonzero value. For more information see the section “[Parameter Estimation by Profile Likelihood Optimization](#)” on page 2160.

SKIPFIRST=integer

indicates that some early part of the data needs to be ignored during the parameter estimation. This can be useful if there is a reason to believe that the model being estimated is not appropriate for this portion of the data. SKIPFIRST=10 results in skipping the first 10 measurements of the response series during the parameter estimation. The default is SKIPFIRST=0.

FORECAST Statement

FORECAST < options > ;

The FORECAST statement is an optional statement that is used to specify the overall forecasting environment for the specified model. It can be used to specify the span of observations, the historical period, to use to compute the forecasts of the future observations. This is done using the SKIPFIRST= and BACK= options. The number of periods to forecast beyond the historical period, and the significance level of the forecast confidence interval, is specified using the LEAD= and ALPHA= options. You can request one-step-ahead series and component forecasts by using the PRINT= option. You can save the series forecasts, and the model-based decomposition of the series, in a data set by using the OUTFOR= option. The following example illustrates the use of this statement:

```
forecast skipfirst=12 back=24 lead=30;
```

This statement requests that the initial 12 and the last 24 response values be excluded during the forecast computations. The forecast horizon, specified using the LEAD= option, is 30 periods; that is, multistep forecasting begins at the end of the historical period and continues for 30 periods. The actual observation span used to compute the multistep forecasting is decided as follows: Suppose that n_0 and n_1 are the observation numbers of the first and the last nonmissing values of the response variable, respectively. As a result of SKIPFIRST=12 and BACK=24, the historical period, or the forecast span, begins at $n_0 + 12$ and ends at $n_1 - 24$. Multistep forecasts are produced for the next 30 periods—that is, for the observation numbers $n_1 - 23$ to $n_1 + 6$. Of course, the forecast computations can fail if the model has regressor variables that have missing values in the forecast span. If the regressors contain missing values in the forecast horizon—that is, between the observations $n_1 - 23$ and $n_1 + 6$ —the forecast horizon is reduced accordingly.

ALPHA=value

specifies the significance level of the forecast confidence intervals; for example, ALPHA=0.05, which is the default, results in a 95% confidence interval.

BACK=integer**SKIPLAST=integer**

specifies the holdout sample for the evaluation of the forecasting performance of the model. For example, BACK=10 results in treating the last 10 observed values of the response series as unobserved. A post-sample-prediction-analysis table is produced for comparing the predicted values with the actual values in the holdout period. The default is BACK=0.

EXTRADIFFUSE=k

enables continuation of the diffuse filtering iterations for k additional iterations beyond the first instance where the initialization of the diffuse state would have otherwise taken place. If the specified k is larger than the sample size, the diffuse iterations continue until the end of the sample. Note that one-step-ahead forecasts are produced only after the diffuse state is initialized. Delaying the initialization leads to reduction in the number of one-step-ahead forecasts. This option is useful when you want to ignore the first few one-step-ahead forecasts that often have large variance.

LEAD=integer

specifies the number of periods to forecast beyond the historical period defined by the SKIPFIRST= and BACK= options; for example, LEAD=10 results in the forecasting of 10 future values of the response series. The default is LEAD=12.

OUTFOR=SAS-data-set

specifies an output data set for the forecasts. The output data set contains the ID variable (if specified), the response and predictor series, the one-step-ahead and out-of-sample response series forecasts, the forecast confidence intervals, the smoothed values of the response series, and the smoothed forecasts produced as a result of the model-based decomposition of the series.

PLOT=DECOMP**PLOT=DECOMPVAR****PLOT=FDECOMP****PLOT=FDECOMPVAR****PLOT=FORECASTS****PLOT=TREND****PLOT=(<plot request> ... <plot request>)**

requests forecast and model decomposition plots. The FORECASTS option provides the plot of the series forecasts, the TREND and DECOMP options provide the plots of the smoothed trend and other decompositions, the DECOMPVAR option can be used to plot the variance of these components, and the FDECOMP and FDECOMPVAR options provide the same plots for the filtered decomposition estimates and their variances.

PRINT=DECOMP**PRINT=FDECOMP****PRINT=FORECASTS****PRINT=NONE****PRINT=(< print request > ... < print request >)**

controls the printing of the series forecasts and the printing of smoothed model decomposition estimates. By default, the series forecasts are printed only for the forecast horizon specified by the LEAD= option; that is, the one-step-ahead predicted values are not printed. You can request forecasts for the entire forecast span by specifying the PRINT=FORECASTS option. Using PRINT=DECOMP, you can get smoothed estimates of the following effects: trend, trend plus regression, trend plus regression plus cycle, and sum of all components except the irregular. If some of these effects are absent in the model, then they are ignored. Similarly you can get filtered estimates of these effects by using PRINT=FDECOMP. You can use PRINT=NONE to suppress the printing of all the forecast output.

SKIPFIRST=integer

indicates that some early part of the data needs to be ignored during the forecasting calculations. This can be useful if there is a reason to believe that the model being used for forecasting is not appropriate for this portion of the data. SKIPFIRST=10 results in skipping the first 10 measurements of the response series during the forecast calculations. The default is SKIPFIRST=0.

ID Statement

ID *variable* **INTERVAL=**value < **ALIGN=**value > ;

The ID statement names a numeric variable that identifies observations in the input and output data sets. The ID variable's values are assumed to be SAS date, time, or datetime values. In addition, the ID statement specifies the frequency associated with the time series. The ID statement options also specify how the observations are aligned to form the time series. If the ID statement is specified, the INTERVAL= option must also be specified. If the ID statement is not specified, the observation number, with respect to the BY group, is used as the time ID. The values of the ID variable are extrapolated for the forecast observations based on the values of the INTERVAL= option.

ALIGN=value

controls the alignment of SAS dates used to identify output observations. The ALIGN= option has the following possible values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. The default is BEGINNING. The ALIGN= option is used to align the ID variable with the beginning, middle, or end of the time ID interval specified by the INTERVAL= option.

INTERVAL=value

specifies the time interval between observations. This option is required in the ID statement. INTERVAL=value is used in conjunction with the ID variable to check that the input data are in order and have no gaps. The INTERVAL= option is also used to extrapolate the ID values past the end of the input data. For a complete discussion of the intervals supported, please see Chapter 4, “[Date Intervals, Formats, and Functions](#).”

IRREGULAR Statement

IRREGULAR <options> ;

The IRREGULAR statement includes an irregular component in the model. There can be at most one IRREGULAR statement in the model specification. The irregular component corresponds to the overall random error ϵ_t in the model. By default the irregular component is modeled as white noise—that is, as a sequence of independent, identically distributed, zero-mean, Gaussian random variables. However, you can also model it as an autoregressive moving average (ARMA) process. The options for specifying an ARMA model for the irregular component are given in a separate subsection: “[ARMA Specification](#)” on page 2132.

The options in this statement enable you to specify the model for the irregular component and to output its estimates. Two examples of the IRREGULAR statement are given next. In the first example the statement is in its simplest form, resulting in the inclusion of an irregular component that is white noise with unknown variance:

```
irregular;
```

The following statement provides a starting value for the white noise variance σ_ϵ^2 to be used in the nonlinear parameter estimation process. It also requests the printing of smoothed estimates of ϵ_t . The smoothed irregulars are useful in model diagnostics.

```
irregular variance=4 print=smooth;
```

NOEST

fixes the value of σ_ϵ^2 to the value specified in the **VARIANCE=** option. Also see the **NOEST=** option in the subsection “[ARMA Specification](#)” on page 2132.

PLOT=FILTER

PLOT=SMOOTH

PLOT=(<FILTER> <SMOOTH>)

requests plotting of the filtered or smoothed estimate of the irregular component.

PRINT=FILTER

PRINT=SMOOTH

PRINT=(<FILTER> <SMOOTH>)

requests printing of the filtered or smoothed estimate of the irregular component.

VARIANCE=value

specifies an initial value for σ_ϵ^2 during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

ARMA Specification

This section details the options for specifying an ARMA model for the irregular component. The specification of ARMA models requires some notation, which is explained first.

Let B denote the backshift operator—that is, for any sequence ϵ_t , $B\epsilon_t = \epsilon_{t-1}$. The higher powers of B represent larger shifts (for example, $B^3\epsilon_t = \epsilon_{t-3}$). A random sequence ϵ_t follows a zero-mean $\text{ARMA}(p,q) \times (P,Q)_s$ model with nonseasonal autoregressive order p , seasonal autoregressive order P , nonseasonal moving average order q , and seasonal moving average order Q , if it satisfies the following difference equation specified in terms of the polynomials in the backshift operator where a_t is a white noise sequence and s is the season length:

$$\phi(B)\Phi(B^s)\epsilon_t = \theta(B)\Theta(B^s)a_t$$

The polynomials ϕ , Φ , θ , and Θ are of orders p , P , q , and Q , respectively, which can be any nonnegative integers. The season length s must be a positive integer. For example, ϵ_t satisfies an $\text{ARMA}(1,1)$ model (that is, $p = 1, q = 1, P = 0$, and $Q = 0$) if

$$\epsilon_t = \phi_1\epsilon_{t-1} + a_t - \theta_1a_{t-1}$$

for some coefficients ϕ_1 and θ_1 and a white noise sequence a_t . Similarly ϵ_t satisfies an $\text{ARMA}(1,1) \times (1,1)_{12}$ model if

$$\epsilon_t = \phi_1\epsilon_{t-1} + \Phi_1\epsilon_{t-12} - \phi_1\Phi_1\epsilon_{t-13} + a_t - \theta_1a_{t-1} - \Theta_1a_{t-12} + \theta_1\Theta_1a_{t-13}$$

for some coefficients ϕ_1 , Φ_1 , θ_1 , and Θ_1 and a white noise sequence a_t . The ARMA process is stationary and invertible if the defining polynomials ϕ , Φ , θ , and Θ have all their roots outside the unit circle—that is, their absolute values are strictly larger than 1.0. It is assumed that the ARMA model specified for the irregular component is stationary and invertible—that is, the coefficients of the polynomials ϕ , Φ , θ , and Θ are constrained so that the stationarity and invertibility conditions are satisfied. The unknown coefficients of these polynomials become part of the model parameter vector that is estimated using the data.

The notation for a closely related class of models, autoregressive integrated moving average (ARIMA) models, is also given here. A random sequence y_t is said to follow an $\text{ARIMA}(p,d,q) \times (P,D,Q)_s$ model if, for some nonnegative integers d and D , the differenced series $\epsilon_t = (1 - B)^d(1 - B^s)^D y_t$ follows an $\text{ARMA}(p,q) \times (P,Q)_s$ model. The integers d and D are called nonseasonal and seasonal differencing orders, respectively. You can specify ARIMA models by using the [DEPLAG](#) statement for specifying the differencing orders and by using the [IRREGULAR](#) statement for the ARMA specification. See [Example 34.8](#) for an example of $\text{ARIMA}(0,1,1) \times (0,1,1)_{12}$ model specification. Brockwell and Davis (1991) can be consulted for additional information about ARIMA models.

You can use options of the [IRREGULAR](#) statement to specify the desired ARMA model and to request printed and graphical output. A few examples of the [IRREGULAR](#) statement are given next.

The following statement specifies an irregular component that is modeled as an $\text{ARMA}(1,1)$ process. It also requests plotting its smoothed estimate.

```
irregular p=1 q=1 plot=smooth;
```

The following statement specifies an $\text{ARMA}(1,1) \times (1,1)_{12}$ model. It also fixes the coefficient of the first-order seasonal moving average polynomial to 0.1. The other coefficients and the white noise variance are estimated using the data.

```
irregular p=1 sp=1 q=1 sq=1 s=12 sma=0.1 noest=(sma);
```

AR= $\phi_1 \phi_2 \dots \phi_p$

lists the starting values of the coefficients of the nonseasonal autoregressive polynomial

$$\phi(B) = 1 - \phi_1 B - \dots - \phi_p B^p$$

where the order p is specified in the **P=** option. The coefficients ϕ_i must define a stationary autoregressive polynomial.

MA= $\theta_1 \theta_2 \dots \theta_q$

lists the starting values of the coefficients of the nonseasonal moving average polynomial

$$\theta(B) = 1 - \theta_1 B - \dots - \theta_q B^q$$

where the order q is specified in the **Q=** option. The coefficients θ_i must define an invertible moving average polynomial.

NOEST=(**<VARIANCE>** **<AR>** **<SAR>** **<MA>** **<SMA>**)

fixes the values of the ARMA parameters and the value of the white noise variance to those specified in the **AR=**, **SAR=**, **MA=**, **SMA=**, or **VARIANCE=** options.

P=integer

specifies the order of the nonseasonal autoregressive polynomial. The order can be any nonnegative integer; the default value is 0. In practice the order is a small integer such as 1, 2, or 3.

Q=integer

specifies the order of the nonseasonal moving average polynomial. The order can be any nonnegative integer; the default value is 0. In practice the order is a small integer such as 1, 2, or 3.

S=integer

specifies the season length used during the specification of the seasonal autoregressive or seasonal moving average polynomial. The season length can be any positive integer; for example, $S=4$ might be an appropriate value for a quarterly series. The default value is $S=1$.

SAR= $\Phi_1 \Phi_2 \dots \Phi_P$

lists the starting values of the coefficients of the seasonal autoregressive polynomial

$$\Phi(B^s) = 1 - \Phi_1 B^s - \dots - \Phi_P B^{sP}$$

where the order P is specified in the **SP=** option and the season length s is specified in the **S=** option. The coefficients Φ_i must define a stationary autoregressive polynomial.

SMA= $\Theta_1 \Theta_2 \dots \Theta_Q$

lists the starting values of the coefficients of the seasonal moving average polynomial

$$\Theta(B^s) = 1 - \Theta_1 B^s - \dots - \Theta_Q B^{sQ}$$

where the order Q is specified in the **SQ=** option and the season length s is specified in the **S=** option. The coefficients Θ_i must define an invertible moving average polynomial.

SP=integer

specifies the order of the seasonal autoregressive polynomial. The order can be any nonnegative integer; the default value is 0. In practice the order is a small integer such as 1 or 2.

SQ=integer

specifies the order of the seasonal moving average polynomial. The order can be any nonnegative integer; the default value is 0. In practice the order is a small integer such as 1 or 2.

LEVEL Statement

LEVEL < options > ;

The LEVEL statement is used to include a level component in the model. The level component, either by itself or together with a slope component (see the [SLOPE](#) statement), forms the trend component, μ_t , of the model. If the slope component is absent, the resulting trend is a random walk (RW) specified by the following equations:

$$\mu_t = \mu_{t-1} + \eta_t, \quad \eta_t \sim i.i.d. \ N(0, \sigma_\eta^2)$$

If the slope component is present, signified by the presence of a [SLOPE](#) statement, a locally linear trend (LLT) is obtained. The equations of LLT are as follows:

$$\begin{aligned} \mu_t &= \mu_{t-1} + \beta_{t-1} + \eta_t, & \eta_t &\sim i.i.d. \ N(0, \sigma_\eta^2) \\ \beta_t &= \beta_{t-1} + \xi_t, & \xi_t &\sim i.i.d. \ N(0, \sigma_\xi^2) \end{aligned}$$

In either case, the options in the LEVEL statement are used to specify the value of σ_η^2 and to request forecasts of μ_t . The SLOPE statement is used for similar purposes in the case of slope β_t . The following examples illustrate the use of the LEVEL statement. Assuming that a SLOPE statement is not added subsequently, a simple random walk trend is specified by the following statement:

```
level;
```

The following statements specify a locally linear trend with value of σ_η^2 fixed at 4. It also requests printing of filtered values of μ_t . The value of σ_ξ^2 , the disturbance variance in the slope equation, is estimated from the data.

```
level variance=4 noest print=filter;
slope;
```

CHECKBREAK

turns on the checking of breaks in the level component.

NOEST

fixes the value of σ_η^2 to the value specified in the [VARIANCE=](#) option.

PLOT=FILTER

PLOT=SMOOTH

PLOT=(< FILTER > < SMOOTH >)

requests plotting of the filtered or smoothed estimate of the level component.

PRINT=FILTER**PRINT=SMOOTH****PRINT=(< FILTER > < SMOOTH >)**

requests printing of the filtered or smoothed estimate of the level component.

VARIANCE=valuespecifies an initial value for σ_{η}^2 , the disturbance variance in the μ_t equation at the start of the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

MODEL Statement

MODEL *dependent* < = *regressors* > ;

The MODEL statement specifies the response variable and, optionally, the predictor or regressor variables for the UCM model. This is a required statement in the UCM procedure. The predictors specified in the MODEL statement are assumed to have a linear and time-invariant relationship with the response. The predictors that have time-varying regression coefficients are specified separately in the [RANDOMREG](#) statement. Similarly, the predictors that have a nonlinear effect on the response variable are specified separately in the [SPLINEREG](#) statement. Only one MODEL statement can be specified.

NLOPTIONS Statement

NLOPTIONS < *options* > ;

PROC UCM uses the nonlinear optimization (NLO) subsystem to perform the nonlinear optimization of the likelihood function during the estimation of model parameters. You can use the NLOPTIONS statement to control different aspects of this optimization process. For most problems the default settings of the optimization process are adequate. However, in some cases it might be useful to change the optimization technique or to change the maximum number of iterations. This can be done by using the TECH= and MAXITER= options in the NLOPTIONS statement as follows:

```
nloptions tech=dbldog maxiter=200;
```

This sets the maximum number of iterations to 200 and changes the optimization technique to DBLDOG rather than the default technique, TRUREG, used in PROC UCM. A discussion of the full range of options that can be used with the NLOPTIONS statement is given in Chapter 6, “[Nonlinear Optimization Methods](#).” In PROC UCM all these options are available except the options related to the printing of the optimization history. In this version of PROC UCM all the printed output from the NLO subsystem is suppressed.

OUTLIER Statement

OUTLIER < options > ;

The OUTLIER statement enables you to control the reporting of the additive outliers (AO) and level shifts (LS) in the response series. The AOs are searched by default. You can turn on the search for LSs by using the [CHECKBREAK](#) option in the LEVEL statement.

ALPHA=*significance-level*

specifies the significance level for reporting the outliers. The default is 0.05.

MAXNUM=*number*

limits the number of outliers to search. The default is MAXNUM=5.

MAXPCT=*number*

is similar to the MAXNUM= option. In the MAXPCT= option you can limit the number of outliers to search for according to a percentage of the series length. The default is MAXPCT=1. When both of these options are specified, the minimum of the two search numbers is used.

PRINT=SHORT | DETAIL

enables you to control the printed output of the outlier search. The PRINT=SHORT option, which is the default, produces an outlier summary table containing the most significant outliers, either AO or LS, discovered in the outlier search. The PRINT=DETAIL option produces, in addition to the outlier summary table, separate tables containing the AO and LS structural break chi-square statistics computed at each time point in the estimation span.

RANDOMREG Statement

RANDOMREG *regressors* < / options > ;

The RANDOMREG statement is used to specify regressors with time-varying regression coefficients. Each regression coefficient—say, β_t —is assumed to evolve as a random walk:

$$\beta_t = \beta_{t-1} + \eta_t, \quad \eta_t \sim i.i.d. \ N(0, \sigma^2)$$

Of course, if the random walk disturbance variance σ^2 is zero, then the regression coefficient is not time varying, and it reduces to the standard regression setting. There can be multiple RANDOMREG statements, and each statement can contain one or more regressors. The regressors in a given RANDOMREG statement form a group that is assumed to share the same disturbance variance parameter. The random walks associated with different regressors are assumed to be independent. For an example of using this statement see [Example 34.4](#). See the section “[Reporting Parameter Estimates for Random Regressors](#)” on page 2157 for additional information about the way parameter estimates are reported for this type of regressors.

NOEST

fixes the value of σ^2 to the value specified in the **VARIANCE=** option.

PLOT=FILTER**PLOT=SMOOTH****PLOT=(< FILTER > < SMOOTH >)**

requests plotting of filtered or smoothed estimate of the time-varying regression coefficient.

PRINT=FILTER**PRINT=SMOOTH****PRINT=(< FILTER > < SMOOTH >)**

requests printing of the filtered or smoothed estimate of the time-varying regression coefficient.

VARIANCE=value

specifies an initial value for σ^2 during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

SEASON Statement

SEASON *LENGTH* = *integer* < *options* > ;

The **SEASON** or **SEASONAL** statement is used to specify a seasonal component, γ_t , in the model. A seasonal component can be one of the two types, **DUMMY** or **TRIG**. A **DUMMY** seasonal with season length s satisfies the following stochastic equation:

$$\sum_{i=0}^{s-1} \gamma_{t-i} = \omega_t, \quad \omega_t \sim i.i.d. \ N(0, \sigma_\omega^2)$$

The equations for a **TRIG** (short for trigonometric) seasonal component are as follows

$$\gamma_t = \sum_{j=1}^{[s/2]} \gamma_{j,t}$$

where $[s/2]$ equals $s/2$ if s is even and $(s-1)/2$ if it is odd. The sinusoids, also called *harmonics*, $\gamma_{j,t}$ have frequencies $\lambda_j = 2\pi j/s$ and are specified by the matrix equation

$$\begin{bmatrix} \gamma_{j,t} \\ \gamma_{j,t}^* \end{bmatrix} = \begin{bmatrix} \cos \lambda_j & \sin \lambda_j \\ -\sin \lambda_j & \cos \lambda_j \end{bmatrix} \begin{bmatrix} \gamma_{j,t-1} \\ \gamma_{j,t-1}^* \end{bmatrix} + \begin{bmatrix} \omega_{j,t} \\ \omega_{j,t}^* \end{bmatrix}$$

where the disturbances $\omega_{j,t}$ and $\omega_{j,t}^*$ are assumed to be independent and, for fixed j , $\omega_{j,t}$ and $\omega_{j,t}^* \sim N(0, \sigma_\omega^2)$. If s is even, then the equation for $\gamma_{s/2,t}^*$ is not needed and $\gamma_{s/2,t}$ is given by

$$\gamma_{s/2,t} = -\gamma_{s/2,t-1} + \omega_{s/2,t}$$

In the **TRIG** seasonal case, the option **KEEPH=** or **DROPH=** can be used to obtain *subset trigonometric* seasonals that contain only a subset of the full set of harmonics $\gamma_{j,t}$, $j = 1, 2, \dots, [s/2]$. This is particularly useful when the season length s is large and the seasonal pattern is relatively smooth.

Note that whether the seasonal type is DUMMY or TRIG, there is only one parameter, the disturbance variance σ_{ω}^2 , in the seasonal model.

There can be more than one seasonal component in the model, necessarily with different season lengths if the seasons are full. You can have multiple *subset* season components with the same season length, if you need to use separate disturbance variances for different sets of harmonics. Each seasonal component is specified using a separate SEASON statement. A model with multiple seasonal components can easily become quite complex and might need a large amount of data and computing resources for its estimation and forecasting. The examples that follow illustrate the use of SEASON statement.

The following statement specifies a DUMMY type (default) seasonal component with a season length of four, corresponding to the quarterly seasonality. The disturbance variance σ_{ω}^2 is estimated from the data.

```
season length=4;
```

The following statement specifies a trigonometric seasonal with monthly seasonality. It also provides a starting value for σ_{ω}^2 .

```
season length=12 type=trig variance=4;
```

DROPHARMONICS|DROPH=number-list | n TO m BY p

enables you to drop some harmonics $\gamma_{j,t}$ from the full set of harmonics used to obtain a trigonometric seasonal. The drop list can include any integer between 1 and $[s/2]$, s being the season length. For example, the following specification results in a specification of a trigonometric seasonal with a season length 12 that consists of only the first four harmonics $\gamma_{j,t}$, $j = 1, 2, 3, 4$:

```
season length=12 type=trig DROPH=5 6;
```

The last two *high* frequency harmonics are dropped. The **DROPH=** option cannot be used with the **KEEPH=** option.

KEEPHARMONICS|KEEPH=number-list | n TO m BY p

enables you to keep only the harmonics $\gamma_{j,t}$ listed in the option to obtain a trigonometric seasonal. The keep list can include any integer between 1 and $[s/2]$, s being the season length. For example, the following specification results in a specification of a trigonometric seasonal with a season length of 12 that consists of all the six harmonics $\gamma_{j,t}$, $j = 1, \dots, 6$:

```
season length=12 type=trig KEEPH=1 to 3;
season length=12 type=trig KEEPH=4 to 6;
```

However, these six harmonics are grouped into two groups, each having its own disturbance variance parameter. The **DROPH=** option cannot be used with the **KEEPH=** option.

LENGTH=integer

specifies the season length, s . This is a required option in this statement. The season length can be any integer greater than or equal to 2. Typical examples of season lengths are 12, corresponding to the monthly seasonality, or 4, corresponding to the quarterly seasonality.

NOEST

fixes the value of the disturbance variance parameter to the value specified in the **VARIANCE=** option.

PLOT=FILTER**PLOT=SMOOTH****PLOT=F_ANNUAL****PLOT=S_ANNUAL****PLOT=(<plot request> ... <plot request>)**

requests plots of the season component. When you specify only one plot request, you can omit the parentheses around the plot request. You can use the **FILTER** and **SMOOTH** options to plot the filtered and smoothed estimates of the season component γ_t . You can use the **F_ANNUAL** and **S_ANNUAL** options to get the plots of “annual” variation in the filtered and smoothed estimates of γ_t . The annual plots are useful to see the change in the contribution of a particular month over the span of years. Here “month” and “year” are generic terms that change appropriately with the interval type being used to label the observations and the season length. For example, for monthly data with a season length of 12, the usual meaning applies, while for daily data with a season length of 7, the days of the week serve as months and the weeks serve as years.

PRINT=HARMONICS

requests printing of the summary of harmonics present in the seasonal component. This option is valid only for the trigonometric seasonal component.

PRINT=FILTER**PRINT=SMOOTH****PRINT=(<print request> ... <print request>)**

requests printing of the filtered or smoothed estimate of the seasonal component γ_t .

TYPE=DUMMY | TRIG

specifies the type of the seasonal component. The default type is **DUMMY**.

VARIANCE=value

specifies an initial value for the disturbance variance, σ_ω^2 , in the γ_t equation at the start of the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

SLOPE Statement

SLOPE <options> ;

The **SLOPE** statement is used to include a slope component in the model. The slope component cannot be used without the level component (see the **LEVEL** statement). The level and slope specifications jointly define the trend component of the model. A **SLOPE** statement without the accompanying **LEVEL** statement is ignored. The equations of the trend, defined jointly by the level μ_t and slope β_t , are as follows:

$$\begin{aligned}\mu_t &= \mu_{t-1} + \beta_{t-1} + \eta_t, & \eta_t &\sim i.i.d. N(0, \sigma_\eta^2) \\ \beta_t &= \beta_{t-1} + \xi_t, & \xi_t &\sim i.i.d. N(0, \sigma_\xi^2)\end{aligned}$$

The SLOPE statement is used to specify the value of the disturbance variance, σ_{ξ}^2 , in the slope equation, and to request forecasts of β_t . The following examples illustrate this statement:

```
level;
slope;
```

The preceding statements fit a model with a locally linear trend. The disturbance variances σ_{η}^2 and σ_{ξ}^2 are estimated from the data. You can request a locally linear trend with fixed slope by using the following statements:

```
level;
slope variance=0 noest;
```

NOEST

fixes the value of the disturbance variance, σ_{ξ}^2 , to the value specified in the **VARIANCE=** option.

PLOT=FILTER

PLOT=SMOOTH

PLOT=(< FILTER > < SMOOTH >)

requests plotting of the filtered or smoothed estimate of the slope component.

PRINT=FILTER

PRINT=SMOOTH

PRINT=(< FILTER > < SMOOTH >)

requests printing of the filtered or smoothed estimate of the slope component β_t .

VARIANCE=value

specifies an initial value for the disturbance variance, σ_{ξ}^2 , in the β_t equation at the start of the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

SPLINEREG Statement

SPLINEREG *regressor* < options > ;

The SPLINEREG statement is used to specify a regressor that has a nonlinear relationship with the dependent series that can be approximated by a given B-spline. If the specified spline has degree d and is based on n internal knots, then it is known that it can be written as a linear combination of $(n + d + 1)$ regressors that are derived from the original regressor. The span of these $(n + d + 1)$ derived regressors includes constant; therefore, to avoid multicollinearity with the level component, one of these regressors is dropped. Specifying the SPLINEREG statement is equivalent to specifying a RANDOMREG statement with these derived regressors. There can be multiple SPLINEREG statements. You must specify at least one interior knot, either using the NKNOTS= option or the KNOTS= option. For additional information about splines, see Chapter 93, “[The TRANSREG Procedure](#)” (*SAS/STAT User's Guide*). For an example of using this statement, see [Example 34.6](#). See the section “[Reporting Parameter Estimates for Random Regressors](#)” on page 2157 for additional information about the way parameter estimates are reported for this type of regressors.

DEGREE=integer

specifies the degree of the spline. It can be any integer larger than or equal to zero. The default value is 3. The polynomial degree should be a small integer, usually 0, 1, 2, or 3. Larger values are rarely useful. If you have any doubt as to what degree to specify, use the default.

KNOTS=number-list | n TO m BY p

specifies the interior knots or break points. The values in the knot list must be nondecreasing and must lie between the minimum and the maximum of the spline regressor values in the input data set. The first time you specify a value in the knot list, it indicates a discontinuity in the n th (from DEGREE= n) derivative of the transformation function at the value of the knot. The second mention of a value indicates a discontinuity in the $(n - 1)$ th derivative of the transformation function at the value of the knot. Knots can be repeated any number of times for decreasing smoothness at the break points, but the values in the knot list can never decrease.

You cannot use the **KNOTS=** option with the **NKNOTS=** option. You should keep the number of knots small.

NKNOTS=m

creates m knots, the first at the $100/(m + 1)$ percentile, the second at the $200/(m + 1)$ percentile, and so on. Knots are always placed at data values; there is no interpolation. For example, if **NKNOTS=3**, knots are placed at the 25th percentile, the median, and the 75th percentile. The value specified for the **NKNOTS=** option must be ≥ 1 . You cannot use the **NKNOTS=** option with the **KNOTS=** option.

NOTE: Specifying knots by using the **NKNOTS=** option can result in different sets of knots in the estimation and forecast stages if the distributions of regressor values in the estimation and forecast spans differ. The estimation span is based on the **BACK=** and **SKIPFIRST=** options in the **ESTIMATE** statement, and the forecast span is based on the **BACK=** and **SKIPFIRST=** options in the **FORECAST** statement.

NOEST

fixes the value of the regression coefficient random walk disturbance variance to the value specified in the **VARIANCE=** option.

PLOT=FILTER**PLOT=SMOOTH****PLOT=(< FILTER > < SMOOTH >)**

requests plotting of filtered or smoothed estimate of the time-varying regression coefficient.

PRINT=FILTER**PRINT=SMOOTH****PRINT=(< FILTER > < SMOOTH >)**

requests printing of filtered or smoothed estimate of the time-varying regression coefficient.

VARIANCE=value

specifies an initial value for the regression coefficient random walk disturbance variance during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

SPLINESEASON Statement

SPLINESEASON *LENGTH* = *integer* *KNOTS* = *integer*₁ *integer*₂ ... <options> ;

The SPLINESEASON statement is used to specify a seasonal pattern that is to be approximated by a given B-spline. If the specified spline has degree d and is based on n internal knots, then it can be written as a linear combination of $(n + d)$ regressors that are derived from the seasonal dummy regressors. The SPLINESEASON specification is equivalent to specifying a RANDOMREG specification with these derived regressors. Such approximation is useful only if the season length is relatively large, at least larger than $(n + d)$. For additional information about splines, see Chapter 93, “The TRANSREG Procedure” (*SAS/STAT User's Guide*). For an example of using this statement, see [Example 34.3](#).

DEGREE = *integer*

specifies the degree of the spline. It can be any integer greater than or equal to zero. The default value is 3.

KNOTS = *integer*₁ *integer*₂ ...

lists the *internal* knots. This list of values must be a nondecreasing sequence of integers within the range of 2 to $(s - 1)$, where s is the season length specified in the **LENGTH**= option. This is a required option in this statement.

LENGTH = *integer*

specifies the season length, s . This is a required option in this statement. The length can be any integer greater than or equal to three.

NOEST

fixes the value of the regression coefficient random walk disturbance variance to the value specified in the **VARIANCE**= option.

OFFSET = *integer*

specifies the position of the first measurement within the season, if the first measurement is not at the start of the season. The OFFSET= value must be between one and the season length. The default value is one. The first measurement refers to the start of the estimation span and the forecast span. If these spans differ, their starting measurements must be separated by an integer multiple of the season length.

PLOT = **FILTER**

PLOT = **SMOOTH**

PLOT = (< **FILTER** > < **SMOOTH** >)

requests plots of the season component. When you specify only one plot request, you can omit the parentheses around the plot request. You can use the FILTER and SMOOTH options to plot the filtered and smoothed estimates of the season component.

PRINT = **FILTER**

PRINT = **SMOOTH**

PRINT = (< **FILTER** > < **SMOOTH** >)

requests the printing of the filtered or smoothed estimate of the spline season component.

RKNOTS=(*knot*, ..., *knot*) ... (*knot*, ..., *knot*)

Experimental

specifies a grouping of knots such that the knots within the same group have identical seasonal values. The knots specified in this option must already be present in the list specified by the **KNOTS**= option. The knot groups must be non-overlapping and without any repeated knots.

VARIANCE=*value*

specifies an initial value for the regression coefficient random walk disturbance variance during the parameter estimation process. Any nonnegative value, including zero, is an acceptable starting value.

Details: UCM Procedure

An Introduction to Unobserved Component Models

A UCM decomposes the response series into components such as trend, seasons, cycles, and the regression effects due to predictor series. The following model shows a possible scenario:

$$y_t = \mu_t + \gamma_t + \psi_t + \sum_{j=1}^m \beta_j x_{jt} + \epsilon_t$$

$$\epsilon_t \sim i.i.d. N(0, \sigma_\epsilon^2)$$

The terms μ_t , γ_t , and ψ_t represent the trend, seasonal, and cyclical components, respectively. In fact the model can contain multiple seasons and cycles, and the seasons can be of different types. For simplicity of discussion the preceding model contains only one of each of these components. The regression term, $\sum_{j=1}^m \beta_j x_{jt}$, includes contribution of regression variables with *fixed* regression coefficients. A model can also contain regression variables that have *time varying* regression coefficients or that have a nonlinear relationship with the dependent series (see “[Incorporating Predictors of Different Kinds](#)” on page 2156). The disturbance term ϵ_t , also called the *irregular* component, is usually assumed to be Gaussian white noise. In some cases it is useful to model the irregular component as a stationary ARMA process. See the section “[Modeling the Irregular Component](#)” on page 2148 for additional information.

By controlling the presence or absence of various terms and by choosing the proper flavor of the included terms, the UCMs can generate a rich variety of time series patterns. A UCM can be applied to variables after transforming them by transforms such as *log* and *difference*.

The components μ_t , γ_t , and ψ_t model structurally different aspects of the time series. For example, the trend μ_t models the natural tendency of the series in the absence of any other perturbing effects such as seasonality, cyclical components, and the effects of exogenous variables, while the seasonal component γ_t models the correction to the level due to the seasonal effects. These components are assumed to be statistically independent of each other and independent of the irregular component. All of the component models can be thought of as stochastic generalizations of the relevant deterministic patterns in time. This way the deterministic cases emerge as special cases of the stochastic models. The different models available for these unobserved components are discussed next.

Modeling the Trend

As mentioned earlier, the trend in a series can be loosely defined as the natural tendency of the series in the absence of any other perturbing effects. The UCM procedure offers two ways to model the trend component μ_t . The first model, called the random walk (RW) model, implies that the trend remains roughly constant throughout the life of the series without any persistent upward or downward drift. In the second model the trend is modeled as a locally linear time trend (LLT). The RW model can be described as

$$\mu_t = \mu_{t-1} + \eta_t, \quad \eta_t \sim i.i.d. \ N(0, \sigma_\eta^2)$$

Note that if $\sigma_\eta^2 = 0$, then the model becomes $\mu_t = \text{constant}$. In the LLT model the trend is locally linear, consisting of both the *level* and *slope*. The LLT model is

$$\begin{aligned} \mu_t &= \mu_{t-1} + \beta_{t-1} + \eta_t, & \eta_t &\sim i.i.d. \ N(0, \sigma_\eta^2) \\ \beta_t &= \beta_{t-1} + \xi_t, & \xi_t &\sim i.i.d. \ N(0, \sigma_\xi^2) \end{aligned}$$

The disturbances η_t and ξ_t are assumed to be independent. There are some interesting special cases of this model obtained by setting one or both of the disturbance variances σ_η^2 and σ_ξ^2 equal to zero. If σ_ξ^2 is set equal to zero, then you get a linear trend model with fixed slope. If σ_η^2 is set to zero, then the resulting model usually has a smoother trend. If both the variances are set to zero, then the resulting model is the deterministic linear time trend: $\mu_t = \mu_0 + \beta_0 t$.

You can incorporate these trend patterns in your model by using the **LEVEL** and **SLOPE** statements.

Modeling a Cycle

A deterministic cycle ψ_t with frequency λ , $0 < \lambda < \pi$, can be written as

$$\psi_t = \alpha \cos(\lambda t) + \beta \sin(\lambda t)$$

If the argument t is measured on a continuous scale, then ψ_t is a periodic function with period $2\pi/\lambda$, amplitude $\gamma = (\alpha^2 + \beta^2)^{1/2}$, and phase $\phi = \tan^{-1}(\beta/\alpha)$. Equivalently, the cycle can be written in terms of the amplitude and phase as

$$\psi_t = \gamma \cos(\lambda t - \phi)$$

Note that when ψ_t is measured only at the integer values, it is not exactly periodic, unless $\lambda = (2\pi j)/k$ for some integers j and k . The cycles in their pure form are not used very often in practice. However, they are very useful as building blocks for more complex periodic patterns. It is well known that the periodic pattern of any complexity can be written as a sum of pure cycles of different frequencies and amplitudes. In time series situations it is useful to generalize this simple cyclical pattern to a stochastic cycle that has a fixed period but time-varying amplitude and phase. The stochastic cycle considered here is motivated by the following recursive formula for computing ψ_t :

$$\begin{bmatrix} \psi_t \\ \psi_t^* \end{bmatrix} = \begin{bmatrix} \cos \lambda & \sin \lambda \\ -\sin \lambda & \cos \lambda \end{bmatrix} \begin{bmatrix} \psi_{t-1} \\ \psi_{t-1}^* \end{bmatrix}$$

starting with $\psi_0 = \alpha$ and $\psi_0^* = \beta$. Note that ψ_t and ψ_t^* satisfy the relation

$$\psi_t^2 + \psi_t^{*2} = \alpha^2 + \beta^2 \quad \text{for all } t$$

A stochastic generalization of the cycle ψ_t can be obtained by adding random noise to this recursion and by introducing a damping factor, ρ , for additional modeling flexibility. This model can be described as follows

$$\begin{bmatrix} \psi_t \\ \psi_t^* \end{bmatrix} = \rho \begin{bmatrix} \cos \lambda & \sin \lambda \\ -\sin \lambda & \cos \lambda \end{bmatrix} \begin{bmatrix} \psi_{t-1} \\ \psi_{t-1}^* \end{bmatrix} + \begin{bmatrix} v_t \\ v_t^* \end{bmatrix}$$

where $0 \leq \rho \leq 1$, and the disturbances v_t and v_t^* are independent $N(0, \sigma_v^2)$ variables. The resulting stochastic cycle has a fixed period but time-varying amplitude and phase. The stationarity properties of the random sequence ψ_t depend on the damping factor ρ . If $\rho < 1$, ψ_t has a stationary distribution with mean zero and variance $\sigma_v^2/(1 - \rho^2)$. If $\rho = 1$, ψ_t is nonstationary.

You can incorporate a cycle in a UCM by specifying a **CYCLE** statement. You can include multiple cycles in the model by using separate **CYCLE** statements for each included cycle.

As mentioned before, the cycles are very useful as building blocks for constructing more complex periodic patterns. Periodic patterns of almost any complexity can be created by superimposing cycles of different periods and amplitudes. In particular, the seasonal patterns, general periodic patterns with integer periods, can be constructed as sums of cycles. This important topic of modeling the seasonal components is considered next.

Modeling Seasons

The seasonal fluctuations are a common source of variation in time series data. These fluctuations arise because of the regular changes in seasons or some other periodic events. The seasonal effects are regarded as corrections to the general trend of the series due to the seasonal variations, and these effects sum to zero when summed over the full season cycle. Therefore the seasonal component γ_t is modeled as a stochastic periodic pattern of an integer period s such that the sum $\sum_{i=0}^{s-1} \gamma_{t-i}$ is always zero in the mean. The period s is called the season length. Two different models for the seasonal component are considered here. The first model is called the *dummy* variable form of the seasonal component. It is described by the equation

$$\sum_{i=0}^{s-1} \gamma_{t-i} = \omega_t, \quad \omega_t \sim i.i.d. \ N(0, \sigma_\omega^2)$$

The other model is called the *trigonometric* form of the seasonal component. In this case γ_t is modeled as a sum of cycles of different frequencies. This model is given as follows

$$\gamma_t = \sum_{j=1}^{[s/2]} \gamma_{j,t}$$

where $[s/2]$ equals $s/2$ if s is even and $(s-1)/2$ if it is odd. The cycles $\gamma_{j,t}$ have frequencies $\lambda_j = 2\pi j/s$ and are specified by the matrix equation

$$\begin{bmatrix} \gamma_{j,t} \\ \gamma_{j,t}^* \end{bmatrix} = \begin{bmatrix} \cos \lambda_j & \sin \lambda_j \\ -\sin \lambda_j & \cos \lambda_j \end{bmatrix} \begin{bmatrix} \gamma_{j,t-1} \\ \gamma_{j,t-1}^* \end{bmatrix} + \begin{bmatrix} \omega_{j,t} \\ \omega_{j,t}^* \end{bmatrix}$$

where the disturbances $\omega_{j,t}$ and $\omega_{j,t}^*$ are assumed to be independent and, for fixed j , $\omega_{j,t}$ and $\omega_{j,t}^* \sim N(0, \sigma_\omega^2)$. If s is even, then the equation for $\gamma_{s/2,t}^*$ is not needed and $\gamma_{s/2,t}$ is given by

$$\gamma_{s/2,t} = -\gamma_{s/2,t-1} + \omega_{s/2,t}$$

The cycles $\gamma_{j,t}$ are called *harmonics*. If the seasonal component is deterministic, the decomposition of the seasonal effects into these harmonics is identical to its Fourier decomposition. In this case the sum of squares of the seasonal factors equals the sum of squares of the amplitudes of these harmonics. In many practical situations, the contribution of the high-frequency harmonics is negligible and can be ignored, giving rise to a simpler description of the seasonal. In the case of stochastic seasonals, the situation might not be so transparent; however, similar considerations still apply. Note that if the disturbance variance $\sigma_\omega^2 = 0$, then both the dummy and the trigonometric forms of seasonal components reduce to constant seasonal effects. That is, the seasonal component reduces to a deterministic function that is completely determined by its first $s - 1$ values.

In the UCM procedure you can specify a seasonal component in a variety of ways, the **SEASON** statement being the simplest of these. The dummy and the trigonometric seasonal components discussed so far can be considered as *saturated* seasonal components that put no restrictions on the $s - 1$ seasonal values. In some cases a more parsimonious representation of the seasonal might be more appropriate. This is particularly useful for seasonal components with large season lengths. In the UCM procedure you can obtain parsimonious representations of the seasonal components by one of the following ways:

- Use a *subset* trigonometric seasonal component obtained by deleting a few of the $[s/2]$ harmonics used in its sum. For example, a slightly smoother seasonal component of length 12, corresponding to the monthly seasonality, can be obtained by deleting the highest-frequency harmonic of period 2. That is, such a seasonal component will be a sum of five stochastic cycles that have periods 12, 6, 4, 3, and 2.4. You can specify such subset seasonal components by using the **KEEPH=** or **DROPH=** option in the **SEASON** statement.
- Approximate the seasonal pattern by a suitable spline approximation. You can do this by using the **SPLINESEASON** statement.
- A *block-seasonal* pattern is a seasonal pattern where the pattern is divided into a few blocks of equal length such that the season values within a block are the same—for example, a monthly seasonal pattern that has only four different values, one for each quarter. In some situations a long seasonal pattern can be approximated by the sum of block season and a simple season, the length of the simple season being equal to the block length of the block season. You can obtain such approximation by using a combination of **BLOCKSEASON** and **SEASON** statements.
- Consider a seasonal component of a large season length as a sum of two or more seasonal components that are each of much smaller season lengths. This can be done by specifying more than one **SEASON** statements.

Note that the preceding techniques of obtaining parsimonious seasonal components can also enable you to specify seasonal components that are more *general* than the simple saturated seasonal components. For example, you can specify a saturated trigonometric seasonal component that has some of its harmonics evolving according to one disturbance variance parameter while the others evolve with another disturbance variance parameter.

Modeling an Autoregression

An autoregression of order one can be thought of as a special case of a cycle when the frequency λ is either 0 or π . Modeling this special case separately helps interpretation and parameter estimation. The autoregression component r_t is modeled as follows

$$r_t = \rho r_{t-1} + v_t, \quad v_t \sim i.i.d. \ N(0, \sigma_v^2)$$

where $-1 \leq \rho < 1$. An autoregression can also provide an alternative to the **IRREGULAR** component when the model errors show some autocorrelation. You can incorporate an autoregression in your model by using the **AUTOREG** statement.

Modeling Regression Effects

A predictor variable can affect the response variable in a variety of ways. The UCM procedure enables you to model several different types of predictor-response relationships:

- The predictor-response relationship is *linear*, and the regression coefficient does not change with time. This is the simplest kind of relationship and such predictors are specified in the **MODEL** statement.
- The predictor-response relationship is *linear*, but the regression coefficient does change with time. Such predictors are specified in the **RANDOMREG** statement. Here the regression coefficient is assumed to evolve as a random walk.
- The predictor-response relationship is *nonlinear* and the relationship can change with time. This type of relationship can be approximated by an appropriate time-varying spline. Such predictors are specified in the **SPLINEREG** statement.

A response variable can depend on its own past values—that is, lagged dependent values. Such a relationship can be specified in the **DEPLAG** statement.

Modeling the Irregular Component

The components—such as trend, seasonal and regression effects, and nonstationary cycles—are used to capture the structural dynamics of a response series. In contrast, the stationary cycles and the autoregression are used to capture the transient aspects of the response series that are important for its short-range prediction but have little impact on its long-term forecasts. The irregular component represents the residual variation remaining in the response series that is modeled using an appropriate selection of structural and transient effects. In most cases, the irregular component can be assumed to be simply Gaussian white noise. In some other cases, however, the residual variation can be more complicated. In such situations, it might be necessary to model the irregular component as a stationary ARMA process. Moreover, you can use the ARMA irregular component together with the dependent lag specification (see the **DEPLAG** statement) to specify an $\text{ARIMA}(p, d, q) \times (P, D, Q)_s$ model for the response series. See the **IRREGULAR** statement for the explanation of the ARIMA notation. See [Example 34.8](#) for an example of modeling a series by using an $\text{ARIMA}(0, 1, 1) \times (0, 1, 1)_{12}$ model.

The Model Parameters

The parameter vector in a UCM consists of the variances of the disturbance terms of the unobserved components, the damping coefficients and frequencies in the cycles, the damping coefficient in the autoregression, and the regression coefficients in the regression terms. These parameters are estimated by maximizing the likelihood. It is possible to restrict the values of the model parameters to user-specified values.

Model Specification

A UCM is specified by describing the components in the model. For example, consider the model

$$y_t = \mu_t + \gamma_t + \epsilon_t$$

consisting of the irregular, level, slope, and seasonal components. This model is called the basic structural model (BSM) by Harvey (1989). The syntax for a BSM with monthly seasonality of trigonometric type is as follows:

```
model y;
irregular;
level;
slope;
season length=12 type=trig;
```

Similarly the following syntax specifies a BSM with a response variable y , a regressor x , and dummy-type monthly seasonality:

```
model y = x;
irregular;
level;
slope variance=0 noest;
season length=12 type=dummy;
```

Moreover, the disturbance variance of the slope component is restricted to zero, giving rise to a local linear trend with fixed slope.

A model can contain multiple cycle and seasonal components. In such cases the model syntax contains a separate statement for each of these multiple cycle or seasonal components; for example, the syntax for a model containing irregular and level components along with two cycle components could be as follows:

```
model y = x;
irregular;
level;
cycle;
cycle;
```

The UCMs as State Space Models

The UCMs considered in PROC UCM can be thought of as special cases of more general models, called (linear) Gaussian state space models (GSSM). A GSSM can be described as follows:

$$\begin{aligned} y_t &= Z_t \alpha_t \\ \alpha_{t+1} &= T_t \alpha_t + \zeta_{t+1}, \quad \zeta_t \sim N(0, Q_t) \\ \alpha_1 &\sim N(0, P) \end{aligned}$$

The first equation, called the *observation equation*, relates the response series y_t to a state vector α_t that is usually unobserved. The second equation, called the *state equation*, describes the evolution of the state vector in time. The system matrices Z_t and T_t are of appropriate dimensions and are known, except possibly for some unknown elements that become part of the parameter vector of the model. The noise series ζ_t consists of independent, zero-mean, Gaussian vectors with covariance matrices Q_t . For most of the UCMs considered here, the system matrices Z_t and T_t , and the noise covariances Q_t , are time invariant—that is, they do not depend on time. In a few cases, however, some or all of them can depend on time. The initial state vector α_1 is assumed to be independent of the noise series, and its covariance matrix P can be partially diffuse. A random vector has a partially diffuse covariance matrix if it can be partitioned such that one part of the vector has a properly defined probability distribution, while the covariance matrix of the other part is infinite—that is, you have no prior information about this part of the vector. The covariance of the initial state α_1 is assumed to have the following form:

$$P = P_* + \kappa P_\infty$$

where P_* and P_∞ are nonnegative definite, symmetric matrices and κ is a constant that is assumed to be close to ∞ . In the case of UCMs considered here, P_∞ is always a diagonal matrix that consists of zeros and ones, and, if a particular diagonal element of P_∞ is one, then the corresponding row and column in P_* are zero.

The state space formulation of a UCM has many computational advantages. In this formulation there are convenient algorithms for estimating and forecasting the unobserved states $\{\alpha_t\}$ by using the observed series $\{y_t\}$. These algorithms also yield the in-sample and out-of-sample forecasts and the likelihood of $\{y_t\}$. The state space representation of a UCM does not need to be unique. In the representation used here, the unobserved components in the UCM often appear as elements of the state vector. This makes the elements of the state interpretable and, more important, the sample estimates and forecasts of these unobserved components are easily obtained. For additional information about the computational aspects of the state space modeling, see Durbin and Koopman (2001). Next, some notation is developed to describe the essential quantities computed during the analysis of the state space models.

Let $\{y_t, t = 1, \dots, n\}$ be the observed sample from a series that satisfies a state space model. Next, for $1 \leq t \leq n$, let the one-step-ahead forecasts of the series, the states, and their variances be defined as follows, using the usual notation to denote the conditional expectation and conditional variance:

$$\begin{aligned} \hat{\alpha}_t &= E(\alpha_t | y_1, y_2, \dots, y_{t-1}) \\ \Gamma_t &= \text{Var}(\alpha_t | y_1, y_2, \dots, y_{t-1}) \\ \hat{y}_t &= E(y_t | y_1, y_2, \dots, y_{t-1}) \\ F_t &= \text{Var}(y_t | y_1, y_2, \dots, y_{t-1}) \end{aligned}$$

These are also called the *filtered* estimates of the series and the states. Similarly, for $t \geq 1$, let the following denote the full-sample estimates of the series and the state values at time t :

$$\begin{aligned}\tilde{\alpha}_t &= E(\alpha_t | y_1, y_2, \dots, y_n) \\ \Delta_t &= \text{Var}(\alpha_t | y_1, y_2, \dots, y_n) \\ \tilde{y}_t &= E(y_t | y_1, y_2, \dots, y_n) \\ G_t &= \text{Var}(y_t | y_1, y_2, \dots, y_n)\end{aligned}$$

If the time t is in the historical period— that is, if $1 \leq t \leq n$ — then the full-sample estimates are called the *smoothed* estimates, and if t lies in the future then they are called out-of-sample forecasts. Note that if $1 \leq t \leq n$, then $\tilde{y}_t = y_t$ and $G_t = 0$, unless y_t is missing.

All the filtered and smoothed estimates ($\hat{\alpha}_t, \tilde{\alpha}_t, \dots, G_t$, and so on) are computed by using the Kalman filtering and smoothing (KFS) algorithm, which is an iterative process. If the initial state is diffuse, as is often the case for the UCMs, its treatment requires modification of the traditional KFS, which is called the diffuse KFS (DKFS). The details of DKFS implemented in the UCM procedure can be found in de Jong and Chu-Chun-Lin (2003). Additional information on the state space models can be found in Durbin and Koopman (2001). The likelihood formulas described in this section are taken from the latter reference.

In the case of diffuse initial condition, the effect of the improper prior distribution of α_1 manifests itself in the first few filtering iterations. During these initial filtering iterations the distribution of the filtered quantities remains diffuse; that is, during these iterations the one-step-ahead series and state forecast variances F_t and Γ_t have the following form:

$$\begin{aligned}F_t &= F_{*t} + \kappa F_{\infty t} \\ \Gamma_t &= \Gamma_{*t} + \kappa \Gamma_{\infty t}\end{aligned}$$

The actual number of iterations—say, I — affected by this improper prior depends on the nature of the vectors Z_t , the number of nonzero diagonal elements of P_∞ , and the pattern of missing values in the dependent series. After I iterations, $\Gamma_{\infty t}$ and $F_{\infty t}$ become zero and the one-step-ahead series and state forecasts have proper distributions. These first I iterations constitute the *initialization* phase of the DKFS algorithm. The post-initialization phase of the DKFS and the traditional KFS is the same. In the state space modeling literature the pre-initialization and post-initialization phases are some times called *pre-collapse* and *post-collapse* phases of the diffuse Kalman filtering. In certain missing value patterns it is possible for I to exceed the sample size; that is, the sample information can be insufficient to create a proper prior for the filtering process. In these cases, parameter estimation and forecasting is done on the basis of this improper prior, and some or all of the series and component forecasts can have infinite variances (or zero precision). The forecasts that have infinite variance are set to missing. The same situation can occur if the specified model contains components that are essentially multicollinear. In these situations no residual analysis is possible; in particular, no residuals-based goodness-of-fit statistics are produced.

The log likelihood of the sample (L_∞), which takes account of this diffuse initialization step, is computed by using the one-step-ahead series forecasts as follows

$$L_\infty(y_1, \dots, y_n) = -\frac{(n-d)}{2} \log 2\pi - \frac{1}{2} \sum_{t=1}^I w_t - \frac{1}{2} \sum_{t=I+1}^n \left(\log F_t + \frac{v_t^2}{F_t} \right)$$

where d is the number of diffuse elements in the initial state α_1 , $v_t = y_t - Z_t \hat{\alpha}_t$ are the one-step-ahead residuals, and

$$\begin{aligned} w_t &= \log F_{\infty t} && \text{if } F_{\infty t} > 0 \\ &= \log F_{*t} + \frac{v_t^2}{F_{*t}} && \text{if } F_{\infty t} = 0 \end{aligned}$$

If y_t is missing at some time t , then the corresponding summand in the log likelihood expression is deleted, and the constant term is adjusted suitably. Moreover, if the initialization step does not complete—that is, if I exceeds the sample size—then the value of d is reduced to the number of diffuse states that are successfully initialized.

The portion of the log likelihood that corresponds to the post-initialization period is called the nondiffuse log likelihood (L_0). The nondiffuse log likelihood is given by

$$L_0(y_1, \dots, y_n) = -\frac{1}{2} \sum_{t=I+1}^n (\log F_t + \frac{v_t^2}{F_t})$$

In the case of UCMs considered in PROC UCM, it often happens that the diffuse part of the likelihood, $\sum_{t=1}^I w_t$, does not depend on the model parameters, and in these cases the maximization of nondiffuse and diffuse likelihoods is equivalent. However, in some cases, such as when the model consists of dependent lags, the diffuse part does depend on the model parameters. In these cases the maximization of the diffuse and nondiffuse likelihood can produce different parameter estimates.

In some situations it is convenient to reparameterize the nondiffuse initial state covariance P_* as $\sigma^2 P_*$ and the state noise covariance Q_t as $\sigma^2 Q_t$ for some common scalar parameter σ^2 . In this case the preceding log-likelihood expression, up to a constant, can be written as

$$L_\infty(y_1, \dots, y_n) = -\frac{1}{2} \sum_{t=1}^I w_t - \frac{1}{2} \sum_{t=I+1}^n \log F_t - \frac{1}{2\sigma^2} \sum_{t=I+1}^n \frac{v_t^2}{F_t} - \frac{(n-d)}{2} \log \sigma^2$$

Solving analytically for the optimum, the maximum likelihood estimate of σ^2 can be shown to be

$$\hat{\sigma}^2 = \frac{1}{(n-d)} \sum_{t=I+1}^n \frac{v_t^2}{F_t}$$

When this expression of σ^2 is substituted back into the likelihood formula, an expression called the *profile likelihood* ($L_{profile}$) of the data is obtained:

$$-2L_{profile}(y_1, \dots, y_n) = \sum_{t=1}^I w_t + \sum_{t=I+1}^n \log F_t + (n-d) \log \left(\sum_{t=I+1}^n \frac{v_t^2}{F_t} \right)$$

In some situations the parameter estimation is done by optimizing the profile likelihood (see the section “[Parameter Estimation by Profile Likelihood Optimization](#)” on page 2160 and the **PROFILE** option in the **ESTIMATE** statement).

In the remainder of this section the state space formulation of UCMs is further explained by using some particular UCMs as examples. The examples show that the state space formulation of the UCMs depends

on the components in the model in a simple fashion; for example, the system matrix T is usually a block diagonal matrix with blocks that correspond to the components in the model. The only exception to this pattern is the UCMs that consist of the lags of dependent variable. This case is considered at the end of the section.

In what follows, $Diag[a, b, \dots]$ denotes a diagonal matrix with diagonal entries $[a, b, \dots]$, and the transpose of a matrix T is denoted as T' .

Locally Linear Trend Model

Recall that the dynamics of the locally linear trend model are

$$\begin{aligned} y_t &= \mu_t + \epsilon_t \\ \mu_t &= \mu_{t-1} + \beta_{t-1} + \eta_t \\ \beta_t &= \beta_{t-1} + \xi_t \end{aligned}$$

Here y_t is the response series and ϵ_t , η_t , and ξ_t are independent, zero-mean Gaussian disturbance sequences with variances σ_ϵ^2 , σ_η^2 , and σ_ξ^2 , respectively. This model can be formulated as a state space model where the state vector $\alpha_t = [\epsilon_t \mu_t \beta_t]'$ and the state noise $\zeta_t = [\epsilon_t \eta_t \xi_t]'$. Note that the elements of the state vector are precisely the unobserved components in the model. The system matrices T and Z and the noise covariance Q corresponding to this choice of state and state noise vectors can be seen to be time invariant and are given by

$$Z = [1 \ 1 \ 0], \quad T = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{bmatrix} \quad \text{and} \quad Q = Diag[\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2]$$

The distribution of the initial state vector α_1 is diffuse, with $P_* = Diag[\sigma_\epsilon^2, 0, 0]$ and $P_\infty = Diag[0, 1, 1]$. The parameter vector θ consists of all the disturbance variances—that is, $\theta = (\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2)$.

Basic Structural Model

The basic structural model (BSM) is obtained by adding a seasonal component, γ_t , to the local level model. In order to economize on the space, the state space formulation of a BSM with a relatively short season length, season length = 4 (quarterly seasonality), is considered here. The pattern for longer season lengths such as 12 (monthly) and 52 (weekly) is easy to see.

Let us first consider the dummy form of seasonality. In this case the state and state noise vectors are $\alpha_t = [\epsilon_t \mu_t \beta_t \gamma_{1,t} \gamma_{2,t} \gamma_{3,t}]'$ and $\zeta_t = [\epsilon_t \eta_t \xi_t \omega_t 0 0]'$, respectively. The first three elements of the state vector are the irregular, level, and slope components, respectively. The remaining elements, $\gamma_{i,t}$, are lagged versions of the seasonal component γ_t . $\gamma_{1,t}$ corresponds to lag zero—that is, the same as γ_t , $\gamma_{2,t}$ to

lag 1 and $\gamma_{3,t}$ to lag 2. The system matrices are

$$Z = [1 \ 1 \ 0 \ 1 \ 0 \ 0], \quad T = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & -1 & -1 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{bmatrix}$$

and $Q = \text{Diag}[\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2, 0, 0]$. The distribution of the initial state vector α_1 is diffuse, with $P_* = \text{Diag}[\sigma_\epsilon^2, 0, 0, 0, 0, 0]$ and $P_\infty = \text{Diag}[0, 1, 1, 1, 1, 1]$.

In the case of the trigonometric type of seasonality, $\alpha_t = [\epsilon_t \ \mu_t \ \beta_t \ \gamma_{1,t} \ \gamma_{1,t}^* \ \gamma_{2,t}]'$ and $\zeta_t = [\epsilon_t \ \eta_t \ \xi_t \ \omega_{1,t} \ \omega_{1,t}^* \ \omega_{2,t}]'$. The disturbance sequences, $\omega_{j,t}$, $1 \leq j \leq 2$, and $\omega_{1,t}^*$, are independent, zero-mean, Gaussian sequences with variance σ_ω^2 . The system matrices are

$$Z = [1 \ 1 \ 0 \ 1 \ 0 \ 1], \quad T = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos \lambda_1 & \sin \lambda_1 & 0 \\ 0 & 0 & 0 & -\sin \lambda_1 & \cos \lambda_1 & 0 \\ 0 & 0 & 0 & 0 & 0 & \cos \lambda_2 \end{bmatrix}$$

and $Q = \text{Diag}[\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2, \sigma_\omega^2, \sigma_\omega^2]$. Here $\lambda_j = (2\pi j)/4$. The distribution of the initial state vector α_1 is diffuse, with $P_* = \text{Diag}[\sigma_\epsilon^2, 0, 0, 0, 0, 0]$ and $P_\infty = \text{Diag}[0, 1, 1, 1, 1, 1]$. The parameter vector in both the cases is $\theta = (\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2)$.

Seasons with Blocked Seasonal Values

Block seasons are special seasonal components that impose a special block structure on the seasonal effects. Let us consider a BSM with monthly seasonality that has a quarterly block structure—that is, months within the same quarter are assumed to have identical effects except for some random perturbation. Such a seasonal component is a block seasonal with block size m equal to 3 and the number of blocks k equal to 4. The state space structure for such a model with dummy-type seasonality is as follows: The state and state noise vectors are $\alpha_t = [\epsilon_t \ \mu_t \ \beta_t \ \gamma_{1,t} \ \gamma_{2,t} \ \gamma_{3,t}]'$ and $\zeta_t = [\epsilon_t \ \eta_t \ \xi_t \ \omega_t \ 0 \ 0]'$, respectively. The first three elements of the state vector are the irregular, level, and slope components, respectively. The remaining elements, $\gamma_{i,t}$, are lagged versions of the seasonal component γ_t . $\gamma_{1,t}$ corresponds to lag zero—that is, the same as γ_t , $\gamma_{2,t}$ to lag m and $\gamma_{3,t}$ to lag $2m$. All the system matrices are time invariant, except the matrix T . They can be seen to be $Z = [1 \ 1 \ 0 \ 1 \ 0 \ 0]$, $Q = \text{Diag}[\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2, 0, 0]$, and

$$T_t = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & -1 & -1 & -1 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \end{bmatrix}$$

when t is a multiple of the block size m , and

$$T_t = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

otherwise. Note that when t is not a multiple of m , the portion of the T_t matrix corresponding to the seasonal is identity. The distribution of the initial state vector α_1 is diffuse, with $P_* = \text{Diag}[\sigma_\epsilon^2, 0, 0, 0, 0, 0]$ and $P_\infty = \text{Diag}[0, 1, 1, 1, 1, 1]$.

Similarly in the case of the trigonometric form of seasonality, $\alpha_t = [\epsilon_t \mu_t \beta_t \gamma_{1,t} \gamma_{1,t}^* \gamma_{2,t}]'$ and $\zeta_t = [\epsilon_t \eta_t \xi_t \omega_{1,t} \omega_{1,t}^* \omega_{2,t}]'$. The disturbance sequences, $\omega_{j,t}$, $1 \leq j \leq 2$, and $\omega_{1,t}^*$, are independent, zero-mean, Gaussian sequences with variance σ_ω^2 . $Z = [1 \ 1 \ 0 \ 1 \ 0 \ 1]$, $Q = \text{Diag}[\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2, \sigma_\omega^2, \sigma_\omega^2]$, and

$$T_t = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & \cos \lambda_1 & \sin \lambda_1 & 0 \\ 0 & 0 & 0 & -\sin \lambda_1 & \cos \lambda_1 & 0 \\ 0 & 0 & 0 & 0 & 0 & \cos \lambda_2 \end{bmatrix}$$

when t is a multiple of the block size m , and

$$T_t = \begin{bmatrix} 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

otherwise. As before, when t is not a multiple of m , the portion of the T_t matrix corresponding to the seasonal is identity. Here $\lambda_j = (2\pi j)/4$. The distribution of the initial state vector α_1 is diffuse, with $P_* = \text{Diag}[\sigma_\epsilon^2, 0, 0, 0, 0, 0]$ and $P_\infty = \text{Diag}[0, 1, 1, 1, 1, 1]$. The parameter vector in both the cases is $\theta = (\sigma_\epsilon^2, \sigma_\eta^2, \sigma_\xi^2, \sigma_\omega^2)$.

Cycles and Autoregression

The preceding examples have illustrated how to build a state space model corresponding to a UCM that includes components such as irregular, trend, and seasonal. There you can see that the state vector and the system matrices have a simple block structure with blocks corresponding to the components in the model. Therefore, here only a simple model consisting of a single cycle and an irregular component is considered. The state space form for more complex UCMs consisting of multiple cycles and other components can be easily deduced from this example.

Recall that a stochastic cycle ψ_t with frequency λ , $0 < \lambda < \pi$, and damping coefficient ρ can be modeled as

$$\begin{bmatrix} \psi_t \\ \psi_t^* \end{bmatrix} = \rho \begin{bmatrix} \cos \lambda & \sin \lambda \\ -\sin \lambda & \cos \lambda \end{bmatrix} \begin{bmatrix} \psi_{t-1} \\ \psi_{t-1}^* \end{bmatrix} + \begin{bmatrix} v_t \\ v_t^* \end{bmatrix}$$

where v_t and v_t^* are independent, zero-mean, Gaussian disturbances with variance σ_v^2 . In what follows, a state space form for a model consisting of such a stochastic cycle and an irregular component is given.

The state vector $\alpha_t = [\epsilon_t \psi_t \psi_t^*]'$, and the state noise vector $\zeta_t = [\epsilon_t v_t v_t^*]'$. The system matrices are

$$Z = [1 \ 1 \ 0] \quad T = \begin{bmatrix} 0 & 0 & 0 \\ 0 & \rho \cos \lambda & \rho \sin \lambda \\ 0 & -\rho \sin \lambda & \rho \cos \lambda \end{bmatrix} \quad Q = \text{Diag}[\sigma_\epsilon^2, \sigma_v^2, \sigma_v^2]$$

The distribution of the initial state vector α_1 is proper, with $P_* = \text{Diag}[\sigma_\epsilon^2, \sigma_\psi^2, \sigma_\psi^2]$, where $\sigma_\psi^2 = \sigma_v^2(1 - \rho^2)^{-1}$. The parameter vector $\theta = (\sigma_\epsilon^2, \rho, \lambda, \sigma_v^2)$.

An autoregression r_t can be considered as a special case of cycle with frequency λ equal to 0 or π . In this case the equation for ψ_t^* is not needed. Therefore, for a UCM consisting of an autoregressive component and an irregular component, the state space model simplifies to the following form.

The state vector $\alpha_t = [\epsilon_t r_t]'$, and the state noise vector $\zeta_t = [\epsilon_t v_t]'$. The system matrices are

$$Z = [1 \ 1], \quad T = \begin{bmatrix} 0 & 0 \\ 0 & \rho \end{bmatrix} \quad \text{and} \quad Q = \text{Diag}[\sigma_\epsilon^2, \sigma_v^2]$$

The distribution of the initial state vector α_1 is proper, with $P_* = \text{Diag}[\sigma_\epsilon^2, \sigma_r^2]$, where $\sigma_r^2 = \sigma_v^2(1 - \rho^2)^{-1}$. The parameter vector $\theta = (\sigma_\epsilon^2, \rho, \sigma_v^2)$.

Incorporating Predictors of Different Kinds

In the UCM procedure, predictors can be incorporated in a UCM in a variety of ways: simple time-invariant linear predictors are specified in the **MODEL** statement, predictors with time-varying coefficients can be specified in the **RANDOMREG** statement, and predictors that have a nonlinear relationship with the response variable can be specified in the **SPLINEREG** statement. As with earlier examples, how to obtain a state space form of a UCM consisting of such variety of predictors is illustrated using a simple special case. Consider a random walk trend model with predictors x , u_1 , u_2 , and v . Let us assume that x is a simple regressor specified in the **MODEL** statement, u_1 and u_2 are random regressors with time-varying regression coefficients that are specified in the same **RANDOMREG** statement, and v is a nonlinear regressor specified on a **SPLINEREG** statement. Let us further assume that the spline associated with v has degree one and is based on two internal knots. As explained in the section “**SPLINEREG Statement**” on page 2141, using v is equivalent to using $(nknots + degree) = (2 + 1) = 3$ derived (random) regressors: say, s_1, s_2, s_3 . In all there are $(1 + 2 + 3) = 6$ regressors, the first one being a simple regressor and the others being time-varying coefficient regressors. The time-varying regressors are in two groups, the first consisting of u_1 and u_2 and

the other consisting of s_1 , s_2 , and s_3 . The dynamics of this model are as follows:

$$\begin{aligned}
 y_t &= \mu_t + \beta x_t + \kappa_{1t} u_{1t} + \kappa_{2t} u_{2t} + \sum_{i=1}^3 \gamma_{it} s_{it} + \epsilon_t \\
 \mu_t &= \mu_{t-1} + \eta_t \\
 \kappa_{1t} &= \kappa_{1(t-1)} + \xi_{1t} \\
 \kappa_{2t} &= \kappa_{2(t-1)} + \xi_{2t} \\
 \gamma_{1t} &= \gamma_{1(t-1)} + \zeta_{1t} \\
 \gamma_{2t} &= \gamma_{2(t-1)} + \zeta_{2t} \\
 \gamma_{3t} &= \gamma_{3(t-1)} + \zeta_{3t}
 \end{aligned}$$

All the disturbances ϵ_t , η_t , ξ_{1t} , ξ_{2t} , ζ_{1t} , ζ_{2t} , and ζ_{3t} are independent, zero-mean, Gaussian variables, where ξ_{1t} , ξ_{2t} share a common variance parameter σ_ξ^2 and ζ_{1t} , ζ_{2t} , ζ_{3t} share a common variance σ_ζ^2 . These dynamics can be captured in the state space form by taking state $\alpha_t = [\epsilon_t \mu_t \beta \kappa_{1t} \kappa_{2t} \gamma_{1t} \gamma_{2t} \gamma_{3t}]'$, state disturbance $\zeta_t = [\epsilon_t \eta_t 0 \xi_{1t} \xi_{2t} \zeta_{1t} \zeta_{2t} \zeta_{3t}]'$, and the system matrices

$$\begin{aligned}
 Z_t &= [1 \ 1 \ x_t \ u_{1t} \ u_{2t} \ s_{1t} \ s_{2t} \ s_{3t}] \\
 T &= \text{Diag}[0, 1, 1, 1, 1, 1, 1, 1] \\
 Q &= \text{Diag}[\sigma_\epsilon^2, \sigma_\eta^2, 0, \sigma_\xi^2, \sigma_\xi^2, \sigma_\zeta^2, \sigma_\zeta^2, \sigma_\zeta^2]
 \end{aligned}$$

Note that the regression coefficients are elements of the state vector and that the system vector Z_t is not time invariant. The distribution of the initial state vector α_1 is diffuse, with $P_* = \text{Diag}[\sigma_\epsilon^2, 0, 0, 0, 0, 0, 0, 0]$ and $P_\infty = \text{Diag}[0, 1, 1, 1, 1, 1, 1, 1]$. The parameters of this model are the disturbance variances, σ_ϵ^2 , σ_η^2 , σ_ξ^2 , and σ_ζ^2 , which get estimated by maximizing the likelihood. The regression coefficients, time-invariant β and time-varying κ_{1t} , κ_{2t} , γ_{1t} , γ_{2t} and γ_{3t} , get implicitly estimated during the state estimation (smoothing).

Reporting Parameter Estimates for Random Regressors

If the random walk disturbance variance associated with a random regressor is held fixed at zero, then its coefficient is no longer time-varying. In the UCM procedure the random regressor parameter estimates are reported differently if the random walk disturbance variance associated with a random regressor is held fixed at zero. The following points explain how the parameter estimates are reported in the parameter estimates table and in the OUTEST= data set.

- If the random walk disturbance variance associated with a random regressor is not held fixed, then its estimate is reported in the parameter estimates table and in the OUTEST= data set.
- If more than one random regressor is specified in a **RANDOMREG** statement, then the first regressor in the list is used as a representative of the list while reporting the corresponding common variance parameter estimate.
- If the random walk disturbance variance is held fixed at zero, then the parameter estimates table and the OUTEST= data set contain the corresponding regression parameter estimate rather than the variance parameter estimate.

- Similar considerations apply in the case of the derived random regressors associated with a spline-regressor.

ARMA Irregular Component

The state space form for the irregular component that follows an $\text{ARMA}(p,q) \times (P,Q)_s$ model is described in this section. The notation for ARMA models is explained in the **IRREGULAR** statement. A number of alternate state space forms are possible in this case; the one given here is based on Jones (1980). With slight abuse of notation, let $p = p + sP$ denote the effective autoregressive order and $q = q + sQ$ denote the effective moving average order of the model. Similarly, let ϕ be the effective autoregressive polynomial and θ be the effective moving average polynomial in the backshift operator with coefficients ϕ_1, \dots, ϕ_p and $\theta_1, \dots, \theta_q$, obtained by multiplying the respective nonseasonal and seasonal factors. Then, a random sequence ϵ_t that follows an $\text{ARMA}(p,q) \times (P,Q)_s$ model with a white noise sequence a_t has a state space form with state vector of size $m = \max(p, q + 1)$. The system matrices, which are time invariant, are as follows: $Z = [1 \ 0 \ \dots \ 0]$. The state transition matrix T , in a blocked form, is given by

$$T = \begin{bmatrix} 0 & I_{m-1} \\ \phi_m & \dots & \phi_1 \end{bmatrix}$$

where $\phi_i = 0$ if $i > p$ and I_{m-1} is an $(m - 1)$ dimensional identity matrix. The covariance of the state disturbance matrix $Q = \sigma^2 \psi \psi'$ where σ^2 is the variance of the white noise sequence a_t and the vector $\psi = [\psi_0 \dots \psi_{m-1}]'$ contains the first m values of the impulse response function—that is, the first m coefficients in the expansion of the ratio θ/ϕ . Since ϵ_t is a stationary sequence, the initial state is nondiffuse and $P_\infty = 0$. The description of P_* , the covariance matrix of the initial state, is a little involved; the details are given in Jones (1980).

Models with Dependent Lags

The state space form of a UCM consisting of the lags of the dependent variable is quite different from the state space forms considered so far. Let us consider an example to illustrate this situation. Consider a model that has random walk trend, two simple time-invariant regressors, and that also includes a few—say, k —lags of the dependent variable. That is,

$$\begin{aligned} y_t &= \sum_{i=1}^k \phi_i y_{t-i} + \mu_t + \beta_1 x_{1t} + \beta_2 x_{2t} + \epsilon_t \\ \mu_t &= \mu_{t-1} + \eta_t \end{aligned}$$

The state space form of this augmented model can be described in terms of the state space form of a model that has random walk trend with two simple time-invariant regressors. A superscript dagger (\dagger) has been added to distinguish the augmented model state space entities from the corresponding entities of the state space form of the random walk with predictors model. With this notation, the state vector of the augmented model $\alpha_t^\dagger = [\alpha_t' \ y_t \ y_{t-1} \ \dots \ y_{t-k+1}]'$ and the new state noise vector $\zeta_t^\dagger = [\zeta_t' \ u_t \ 0 \ \dots \ 0]'$, where u_t is the matrix product $Z_t \zeta_t$. Note that the length of the new state vector is $k + \text{length}(\alpha_t) = k + 4$. The new

system matrices, in block form, are

$$Z_t^\dagger = [0 \ 0 \ 0 \ 0 \ 1 \ \dots \ 0], \quad T_t^\dagger = \begin{bmatrix} T_t & 0 & \dots & 0 \\ Z_{t+1}T_t & \phi_1 & \dots & \phi_k \\ 0 & I_{k-1,k-1} & & 0 \end{bmatrix}$$

where $I_{k-1,k-1}$ is the $k - 1$ dimensional identity matrix and

$$Q_t^\dagger = \begin{bmatrix} Q_t & Q_t Z_t' & 0 \\ Z_t Q_t & Z_t Q_t Z_t' & 0 \\ 0 & 0 & 0 \end{bmatrix}$$

Note that the T and Q matrices of the random walk with predictors model are time invariant, and in the expressions above their time indices are kept because they illustrate the pattern for more general models. The initial state vector is diffuse, with

$$P_*^\dagger = \begin{bmatrix} P_* & 0 \\ 0 & 0 \end{bmatrix}, \quad P_\infty^\dagger = \begin{bmatrix} P_\infty & 0 \\ 0 & I_{k,k} \end{bmatrix}$$

The parameters of this model are the disturbance variances σ_ϵ^2 and σ_η^2 , the lag coefficients $\phi_1, \phi_2, \dots, \phi_k$, and the regression coefficients β_1 and β_2 . As before, the regression coefficients get estimated during the state smoothing, and the other parameters are estimated by maximizing the likelihood.

Outlier Detection

In time series analysis it is often useful to detect changes over time in the characteristics of the response series. In the UCM procedure you can search for two types of changes, additive outliers (AO) and level shifts (LS). An additive outlier is an unusual value in the series, the cause of which might be a data recording error or a temporary shock to the series generation process. A level shift represents a permanent shift, either up or down, in the level of the series. You can control different aspects of the outlier search, such as the significance level of the reported outliers, by choosing different options in the **OUTLIER** statement. The search for AOs is done by default, whereas the **CHECKBREAK** option in the **LEVEL** statement must be used to turn on the search for LSs.

The outlier detection process implemented in the UCM procedure is based on de Jong and Penzer (1998). In this approach the fitted model is taken to be the *null* model, and the series values and level shifts that are not adequately accounted for by the null model are flagged as outliers. The unusualness of a response series value at a particular time point t_0 , with respect to the fitted model, can be judged by estimating its value based on the rest of the data (that is, the series obtained by *deleting* the series value at t_0) and comparing the estimated value to the observed value. If the difference between the estimated and observed values is statistically significant, then such value can be regarded as an AO. Note that this difference between the estimated and observed values is also the regression coefficient of a *dummy* regressor that takes the value 1.0 at t_0 and is 0.0 elsewhere, assuming such a regressor is added to the null model. In this way the series value at t_0 is regarded as AO if the regression coefficient of this dummy regressor is significant. Similarly, you can say that a level shift has occurred at a time point t_0 if the regression coefficient of a regressor, which is 0.0 before t_0 and 1.0 at t_0 and thereafter, is statistically significant. De Jong and Penzer (1998) provide an efficient way to compute such AO and LS regression coefficients and their standard errors at all time points in the series. The outlier summary table, which is produced by default, simply lists the most statistically significant candidates among these.

Missing Values

Embedded missing values in the dependent variable usually cause no problems in UCM modeling. However, no embedded missing values are allowed in the predictor variables. Certain patterns of missing values in the dependent variable can lead to failure of the initialization step of the diffuse Kalman filtering for some models. For example, if in a monthly series all values are missing for a certain month—say, May—then a BSM with monthly seasonality leads to such a situation. However, in this case the initialization step can complete successfully for a nonseasonal model such as local linear model.

Parameter Estimation

The parameter vector in a UCM consists of the variances of the disturbance terms of the unobserved components, the damping coefficients and frequencies in the cycles, the damping coefficient in the autoregression, the lag coefficients of the dependent lags, and the regression coefficients in the regression terms. The regression coefficients are always part of the state vector and are estimated by state smoothing. The remaining parameters are estimated by maximizing either the full diffuse likelihood or the nondiffuse likelihood. The decision to use the full diffuse likelihood or the nondiffuse likelihood depends on the presence or absence of the dependent lag coefficients in the parameter vector. If the parameter vector does not contain any dependent lag coefficients, then the full diffuse likelihood is used. If, on the other hand, the parameter vector does contain some dependent lag coefficients, then the parameters are estimated by maximizing the nondiffuse likelihood. The optimization of the full diffuse likelihood is often unstable when the parameter vector contains dependent lag coefficients. In this sense, when the parameter vector contains dependent lag coefficients, the parameter estimates are not true maximum likelihood estimates.

The optimization of the likelihood, either full or nondiffuse, is carried out using one of several nonlinear optimization algorithms. The user can control many aspects of the optimization process by using the **NLOPTIONS** statement and by providing the starting values of the parameters while specifying the corresponding components. However, in most cases the default settings work quite well. The optimization process is not guaranteed to converge to a maximum likelihood estimate. In most cases the difficulties in parameter estimation are associated with the specification of a model that is not appropriate for the series being modeled.

Parameter Estimation by Profile Likelihood Optimization

If a disturbance variance, such as the disturbance variance of the irregular component, is a part of the UCM and is a free parameter, then it can be profiled out of the likelihood. This means solving analytically for its optimum and plugging this expression back into the likelihood formula, giving rise to the so-called *profile* likelihood. The expression of the profile likelihood and the MLE of the profiled variance are given earlier in the section “[The UCMs as State Space Models](#)” on page 2150, where the computation of the likelihood of the state space model is also discussed.

In some situations the optimization of the profile likelihood can be more efficient because the number of parameters to optimize is reduced by one; however, for a variety of reasons such gains might not always be observed. Moreover, in theory the estimates obtained by optimizing the profile likelihood and the usual

likelihood should be the same, but in practice this might not hold because of numerical rounding and other conditions.

In the UCM procedure, by default the usual likelihood is optimized if any of the disturbance variance parameters is held fixed to a nonzero value by using the NOEST option in the corresponding component statement. In other cases the decision whether to optimize the profile likelihood or the usual likelihood is based on several factors that are difficult to document. You can choose which likelihood to optimize during parameter estimation by specifying the **PROFILE** option for the profile likelihood optimization or the **NOPROFILE** option for the usual likelihood optimization. In the presence of the **PROFILE** option, the disturbance variance to profile is checked in a specific order, so that if the irregular component disturbance variance is free then it is always chosen. The situation in other cases is more complicated.

Profiling in the Presence of Fixed Variance Parameters

Note that when the parameter estimation is done by optimizing the profile likelihood, the interpretation of the variance parameters that are held fixed to nonzero values changes. In the presence of the **PROFILE** option, the disturbance variances that are held at a fixed value by using the NOEST option in their respective component statements are interpreted as being restricted to be that fixed multiple of the profiled variance rather than being fixed at that nominal value. That is, implicitly, the parameter estimation is done under the restriction of holding the disturbance variance *ratio* fixed at a given value rather than the disturbance variance itself. See [Example 34.5](#) for an example of this type of restriction to obtain a UC model that is equivalent to the famous Hodrick-Prescott filter.

***t* values**

The *t* values reported in the table of parameter estimates are approximations whose accuracy depends on the validity of the model, the nature of the model, and the length of the observed series. The distributional properties of the maximum likelihood estimates of general unobserved components models have not been explored fully; therefore the probability values that correspond to a *t* distribution should be interpreted carefully, as they can be misleading. This is particularly true if the parameters in question are close to the boundary of the parameter space. The two sources by Harvey (1989, 2001) are good references for information about this topic. For some parameters, such as, the cycle period, the reported *t* values are uninformative because comparison of the estimated parameter with zero is never needed. In such cases the *t* values and the corresponding probability values should be ignored.

Computational Issues

Convergence Problems

As explained in the section “[Parameter Estimation](#)” on page 2160, the model parameters are estimated by nonlinear optimization of the likelihood. This process is not guaranteed to succeed. For some data sets, the optimization algorithm can fail to converge. Nonconvergence can result from a number of causes, including flat or ridged likelihood surfaces and ill-conditioned data. It is also possible for the algorithm to converge to a point that is not the global optimum of the likelihood.

If you experience convergence problems, the following points might be helpful:

- Data that are extremely large or extremely small can adversely affect results because of the internal tolerances used during the filtering steps of the likelihood calculation. Rescaling the data can improve stability.
- Examine your model for redundancies in the included components and regressors. If some of the included components or regressors are nearly collinear to each other, then the optimization process can become unstable.
- Experimenting with different options offered by the `NLOPTIONS` statement can help.
- Lack of convergence can indicate model misspecification or a violation of the normality assumption.

Computer Resource Requirements

The computing resources required for the UCM procedure depend on several factors. The memory requirement for the procedure is largely dependent on the number of observations to be processed and the size of the state vector underlying the specified model. If n denotes the sample size and m denotes the size of the state vector, the memory requirement for the smoothing stage of the Kalman filter is of the order of $6 \times 8 \times n \times m^2$ bytes, ignoring the lower-order terms. If the smoothed component estimates are not needed then the memory requirement is of the order of $6 \times 8 \times (m^2 + n)$ bytes. Besides m and n , the computing time for the parameter estimation depends on the type of components included in the model. For example, the parameter estimation is usually faster if the model parameter vector consists only of disturbance variances, because in this case there is an efficient way to compute the likelihood gradient.

Displayed Output

The default printed output produced by the UCM procedure is described in the following list:

- brief information about the input data set, including the data set name and label, and the name of the ID variable specified in the ID statement
- summary statistics for the data in the estimation and forecast spans, including the names of the variables in the model, their categorization as dependent or predictor, the index of the beginning and ending observations in the spans, the total number of observations and the number of missing observations, the smallest and largest measurements, and the mean and standard deviation
- information about the model parameters at the start of the model-fitting stage, including the fixed parameters in the model and the initial estimates of the free parameters in the model
- convergence status of the likelihood optimization process if any parameter estimation is done
- estimates of the free parameters at the end of the model fitting-stage, including the parameter estimates, their approximate standard errors, t statistics, and the approximate p -value

- the likelihood-based goodness-of-fit statistics, including the full likelihood, the portion of the likelihood corresponding to the diffuse initialization, the sum of squares of residuals normalized by their standard errors, and the information criteria: AIC, AICC, HQIC, BIC, and CAIC
- the fit statistics that are based on the raw residuals (observed minus predicted), including the mean squared error (MSE), the root mean squared error (RMSE), the mean absolute percentage error (MAPE), the maximum percentage error (MAXPE), the R square, the adjusted R square, the random walk R square, and Amemiya's R square
- the significance analysis of the components included in the model that is based on the estimation span
- brief information about the components included in the model
- additive outliers in the series, if any are detected
- the multistep series forecasts
- post-sample-prediction analysis table that compares the multistep forecasts with the observed series values, if the BACK= option is used in the FORECAST statement

Statistical Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User's Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section provides information about the basic ODS statistical graphics produced by the UCM procedure.

You can obtain most plots relevant to the specified model by using the global **PLOTS=** option in the PROC UCM statement. The plot of series forecasts in the forecast horizon is produced by default. You can further control the production of individual plots by using the **PLOT=** options in the different statements.

The main types of plots available are as follows:

- Time series plots of the component estimates, either filtered or smoothed, can be requested by using the **PLOT=** option in the respective component statements. For example, the use of **PLOT=SMOOTH** option in a CYCLE statement produces a plot of smoothed estimate of that cycle.
- Residual plots for model diagnostics can be obtained by using the **PLOT=** option in the ESTIMATE statement.
- Plots of series forecasts and model decompositions can be obtained by using the **PLOT=** option in the FORECAST statement.

The following example is a simple illustration of the available plot options.

Analysis of Sunspot Data: Illustration of ODS Graphics

In this example a well-known series, Wolfer's sunspot data (Anderson 1971), is considered. The data consist of yearly sunspot numbers recorded from 1749 to 1924. These sunspot numbers are known to have a cyclical pattern with a period of about eleven years. The following DATA step creates the input data set:

```
data sunspot;
    input year wolfer @@;
    year = mdy(1,1, year);
    format year year4.;
datalines;
1749  809 1750  834 1751  477 1752  478 1753  307 1754  122 1755   96
1756  102 1757  324 1758  476 1759  540 1760  629 1761  859 1762  612

... more lines ...
```

The following statements specify a UCM that includes a cycle component and a random walk trend component:

```
proc ucm data=sunspot;
    id year interval=year;
    model wolfer;
    irregular;
        level ;
    cycle plot=(filter smooth);
    estimate back=24 plot=(loess panel cusum wn);
    forecast back=24 lead=24 plot=(forecasts decomp);
run;
```

The following subsections explain the graphics produced by the above statements.

Component Plots

The plots in Figure 34.8 and Figure 34.9, produced by specifying PLOT=(FILTER SMOOTH) in the CYCLE statement, show the filtered and smoothed estimates, respectively, of the cycle component in the model. Note that the smoothed estimate appears smoother than the filtered estimate. This is always true because the filtered estimate of a component at time t is based on the observations prior to time t —that is, it uses measurements from the first observation up to the $(t - 1)$ th observation. On the other hand, the corresponding smoothed estimate uses all the available observations—that is, all the measurements from the first observation to the last. This makes the smoothed estimate of the component more precise than the filtered estimate for the time points within historical period. In the forecast horizon, both filtered and smoothed estimates are identical, being based on the same set of observations.

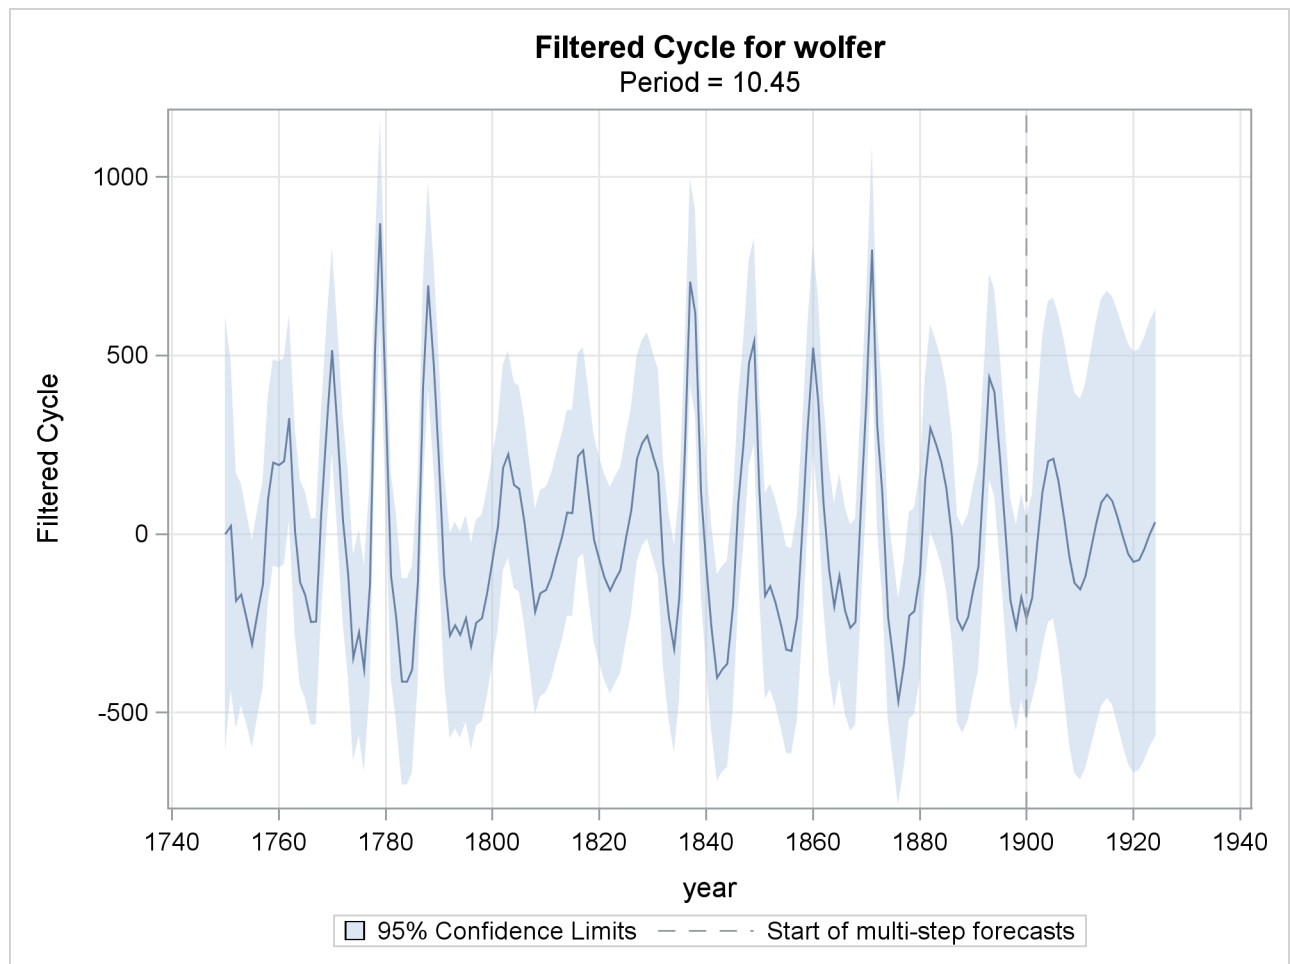
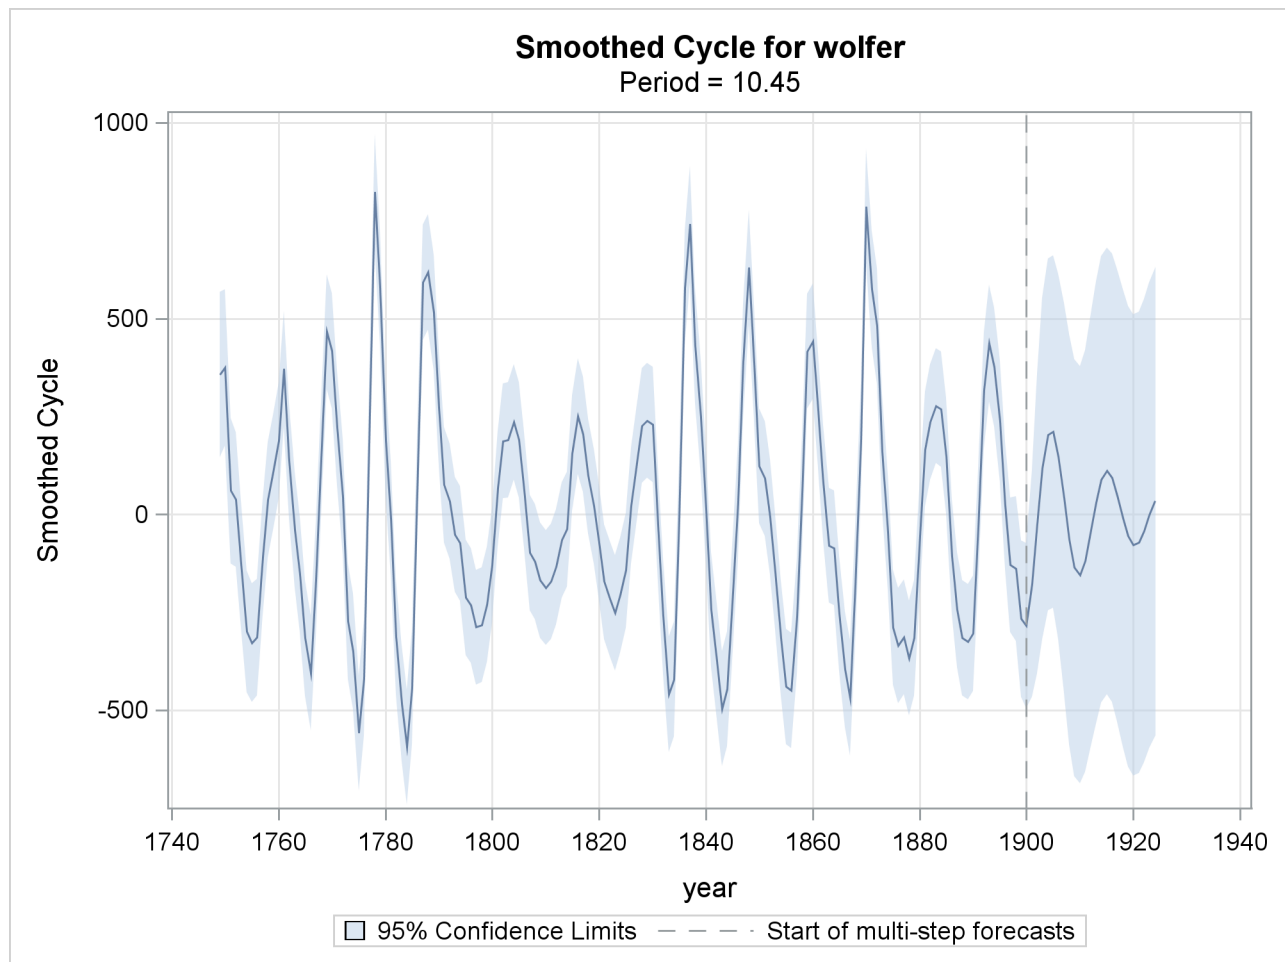
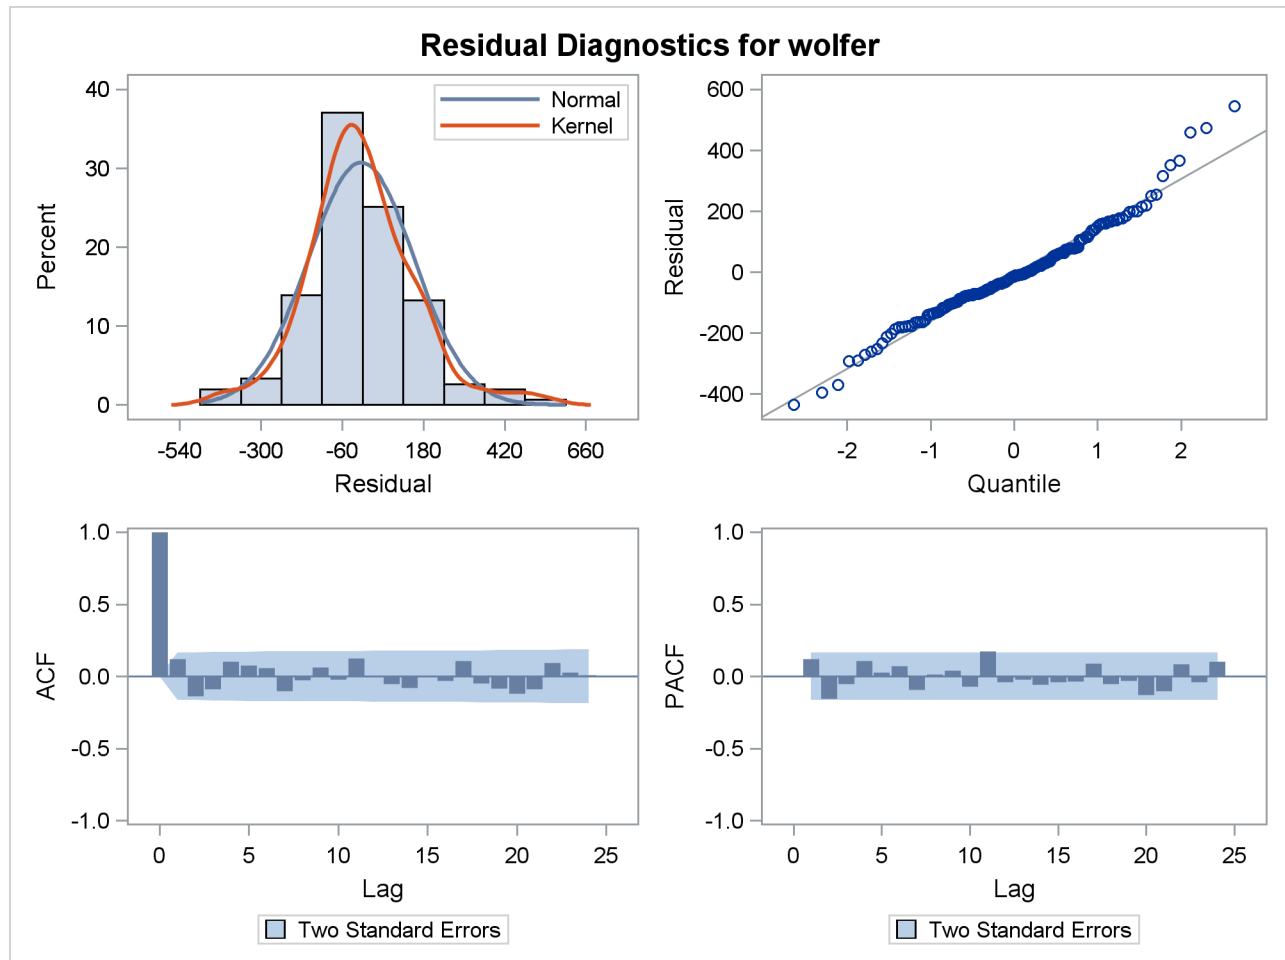
Figure 34.8 Sunspots Series: Filtered Cycle

Figure 34.9 Sunspots Series: Smoothed Cycle

Residual Diagnostics

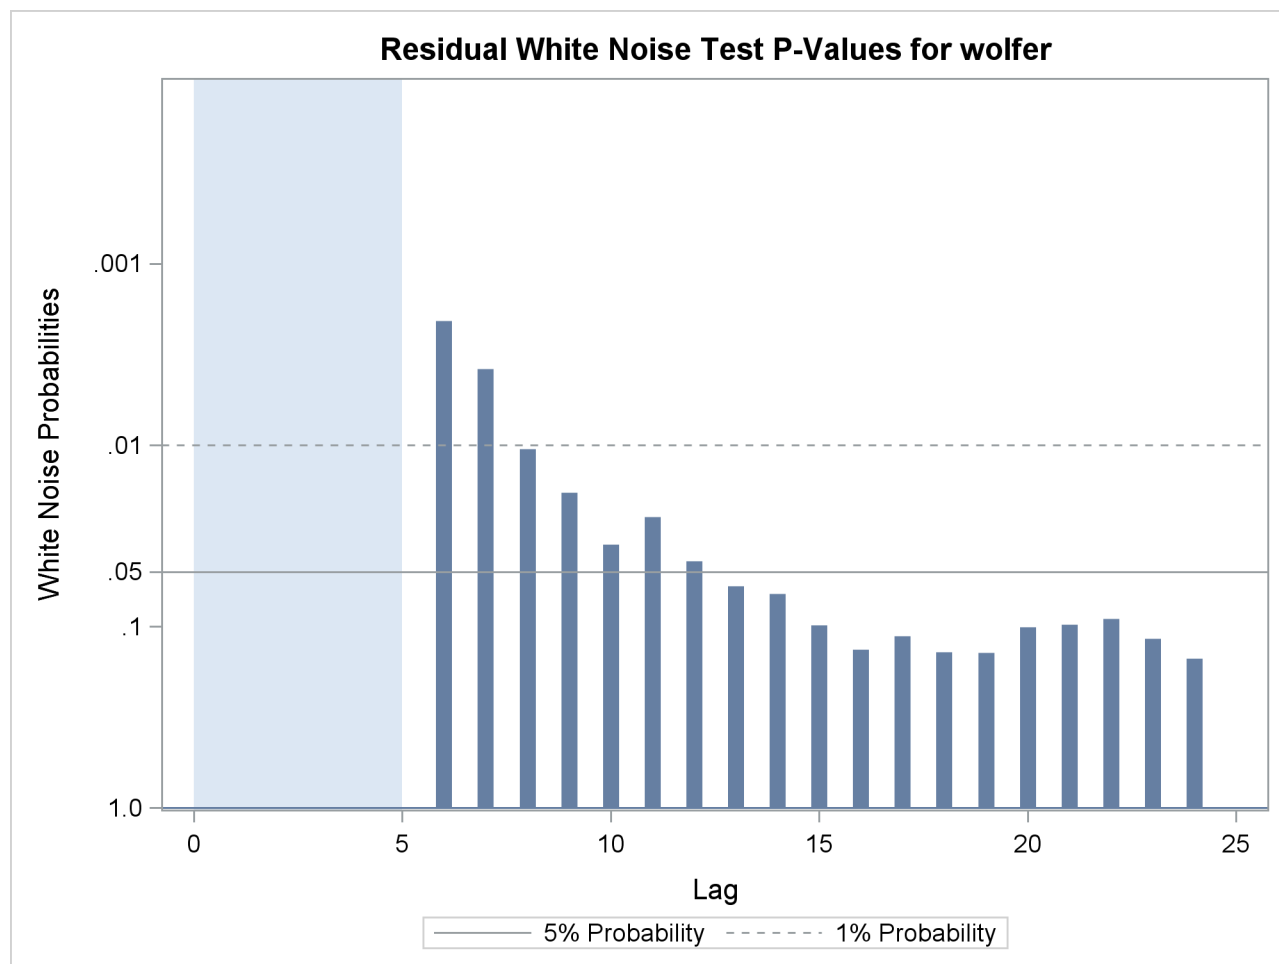
If the fitted model is appropriate for the given data, then the corresponding one-step-ahead residuals should be approximately *white*—that is, uncorrelated—and approximately normal. Moreover, the residuals should not display any discernible pattern. You can detect departures from these conditions graphically. Different residual diagnostic plots can be requested by using the `PLOT=` option in the `ESTIMATE` statement.

The normality can be checked by examining the histogram and the normal quantile plot of residuals. The whiteness can be checked by examining the ACF and PACF plots that show the sample autocorrelation and sample partial-autocorrelation at different lags. The diagnostic panel shown in Figure 34.10, produced by specifying `PLOT=``PANEL`, contains these four plots.

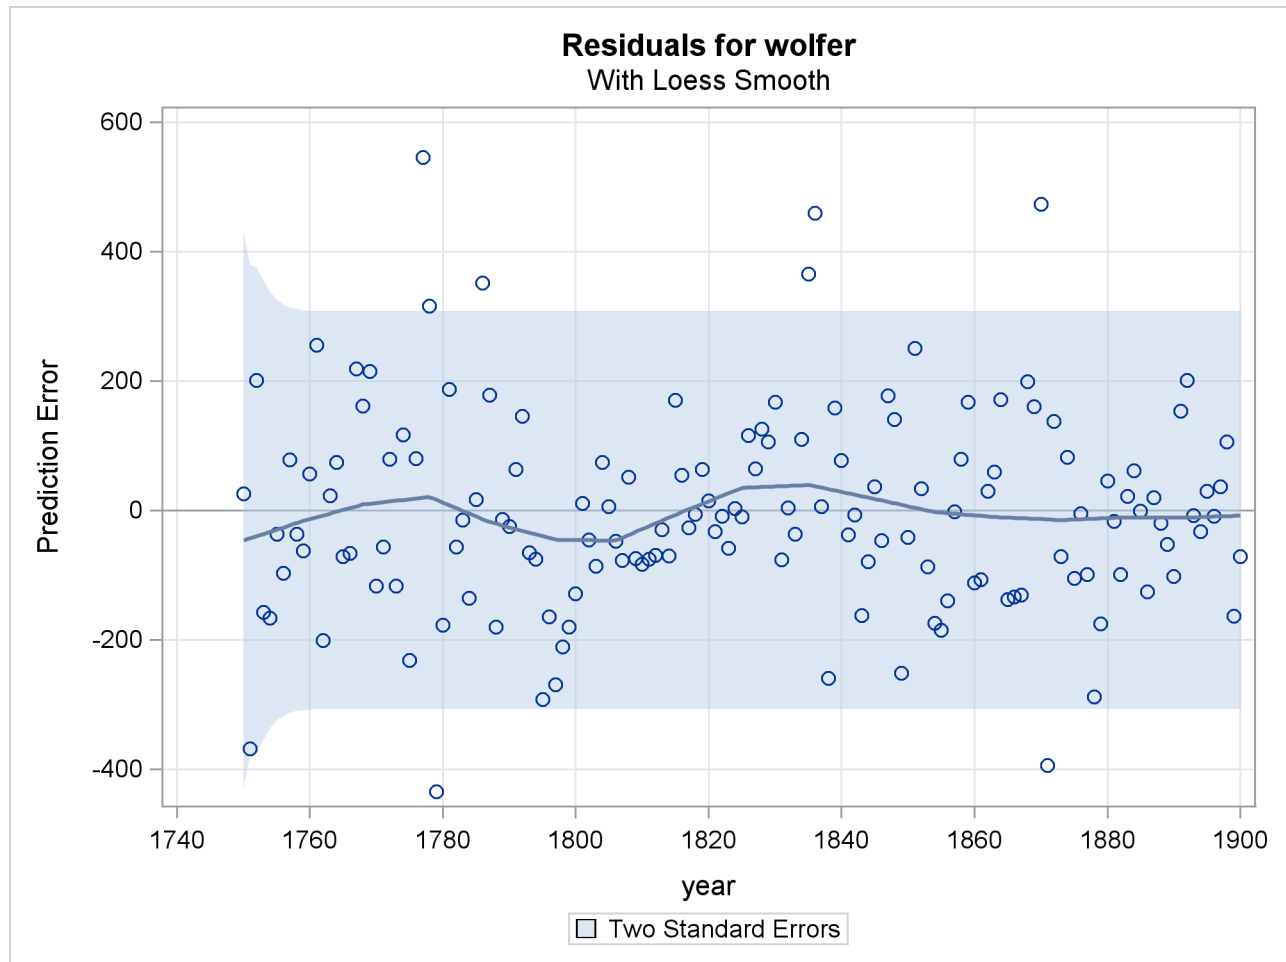
Figure 34.10 Sunspots Series: Residual Diagnostics

The residual histogram and Q-Q plot show no serious violation of normality. The histogram appears reasonably symmetric and follows the overlaid normal density curve reasonably closely. Similarly in the Q-Q plot the residuals follow the reference line fairly closely. The ACF and PACF plots also do not exhibit any violation of the whiteness assumption; the correlations at all nonzero lags seem to be insignificant.

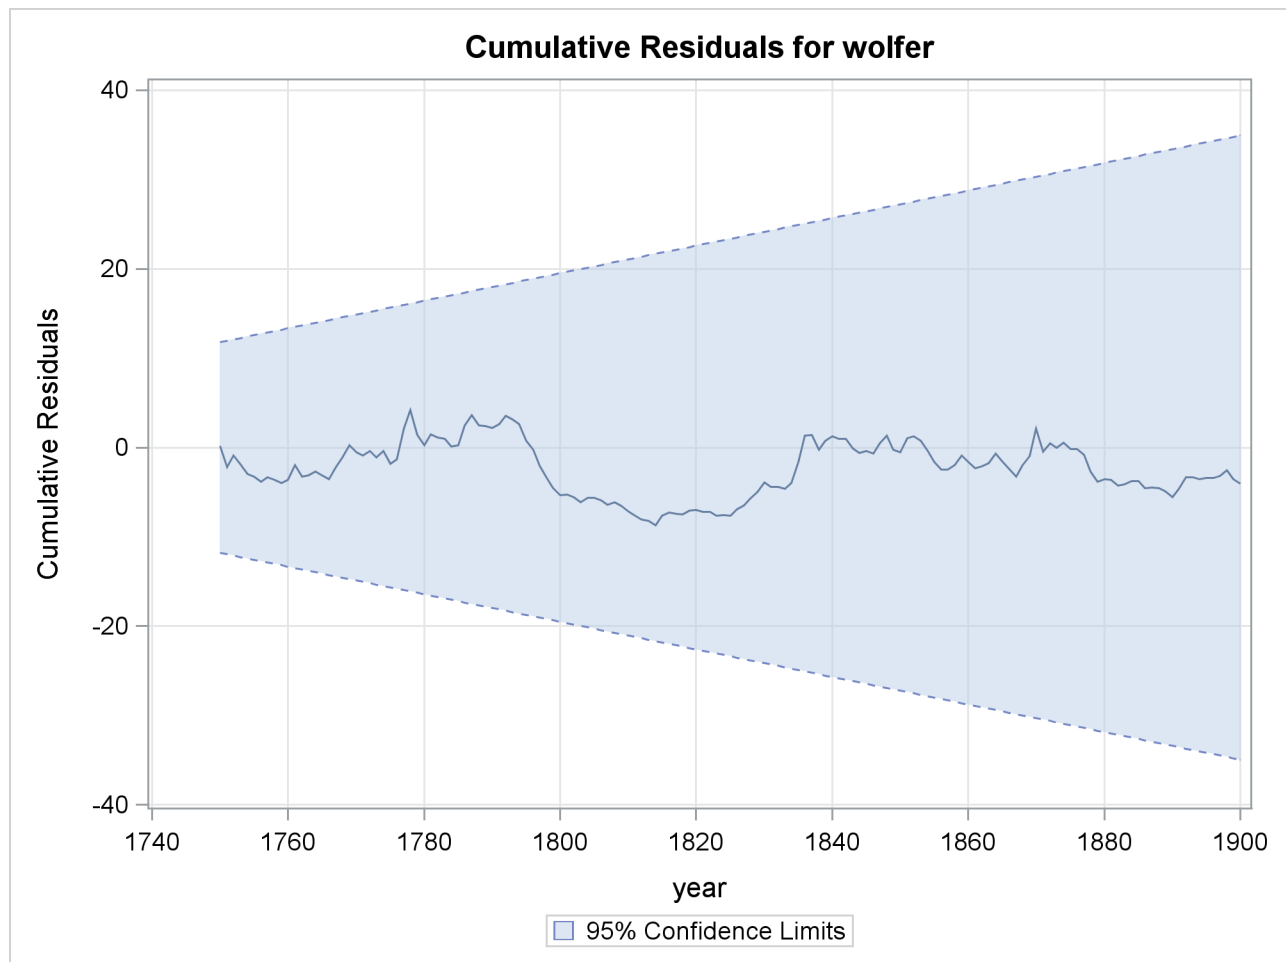
The residual whiteness can also be formally tested by using the Ljung-Box portmanteau test. The plot in [Figure 34.11](#), produced by specifying `PLOT=WN`, shows the p -values of the Ljung-Box test statistics at different lags. In these plots the p -values for the first few lags, equal to the number of estimated parameters in the model, are not shown because they are always missing. This portion of the plot is shaded blue to indicate this fact. In the case of this model, five parameters are estimated so the p -values for the first five lags are not shown. The p -values are displayed on a log scale in such a way that higher bars imply more extreme test statistics. In this plot some early p -values appear extreme. However, these p -values are based on large sample theory, which suggests that these statistics should be examined for lags larger than the square root of sample size. In this example it means that the p -values for the first $\sqrt{154} \approx 12$ lags can be ignored. With this consideration, the plot shows no violation of whiteness since the p -values after the 12th lag do not appear extreme.

Figure 34.11 Sunspots Series: Ljung-Box Portmanteau Test

The plot in [Figure 34.12](#), produced by specifying PLOT=LOESS, shows the residuals plotted against time with an overlaid LOESS curve. This plot is useful for checking whether any discernible pattern remains in the residuals. Here again, no significant pattern appears to be present.

Figure 34.12 Sunspots Series: Residual Loess Plot

The plot in [Figure 34.13](#), produced by specifying `PLOT=CUSUM`, shows the cumulative residuals plotted against time. This plot is useful for checking structural breaks. Here, there appears to be no evidence of structural break since the cumulative residuals remain within the confidence band throughout the sample period. Similarly you can request a plot of the squared cumulative residuals by specifying `PLOT=CUSUMSQ`.

Figure 34.13 Sunspots Series: CUSUM Plot

Brockwell and Davis (1991) can be consulted for additional information on diagnosing residuals. For more information on CUSUM and CUSUMSQ plots, you can consult Harvey (1989).

Forecast and Series Decomposition Plots

You can use the PLOT= option in the FORECAST statement to obtain the series forecast plot and the series decomposition plots. The series decomposition plots show the result of successively adding different components in the model starting with the trend component. The IRREGULAR component is left out of this process. The following two plots, produced by specifying PLOT=DECOMP, show the results of successive component addition for this example. The first plot, shown in Figure 34.14, shows the smoothed trend component and the second plot, shown in Figure 34.15, shows the sum of smoothed trend and cycle.

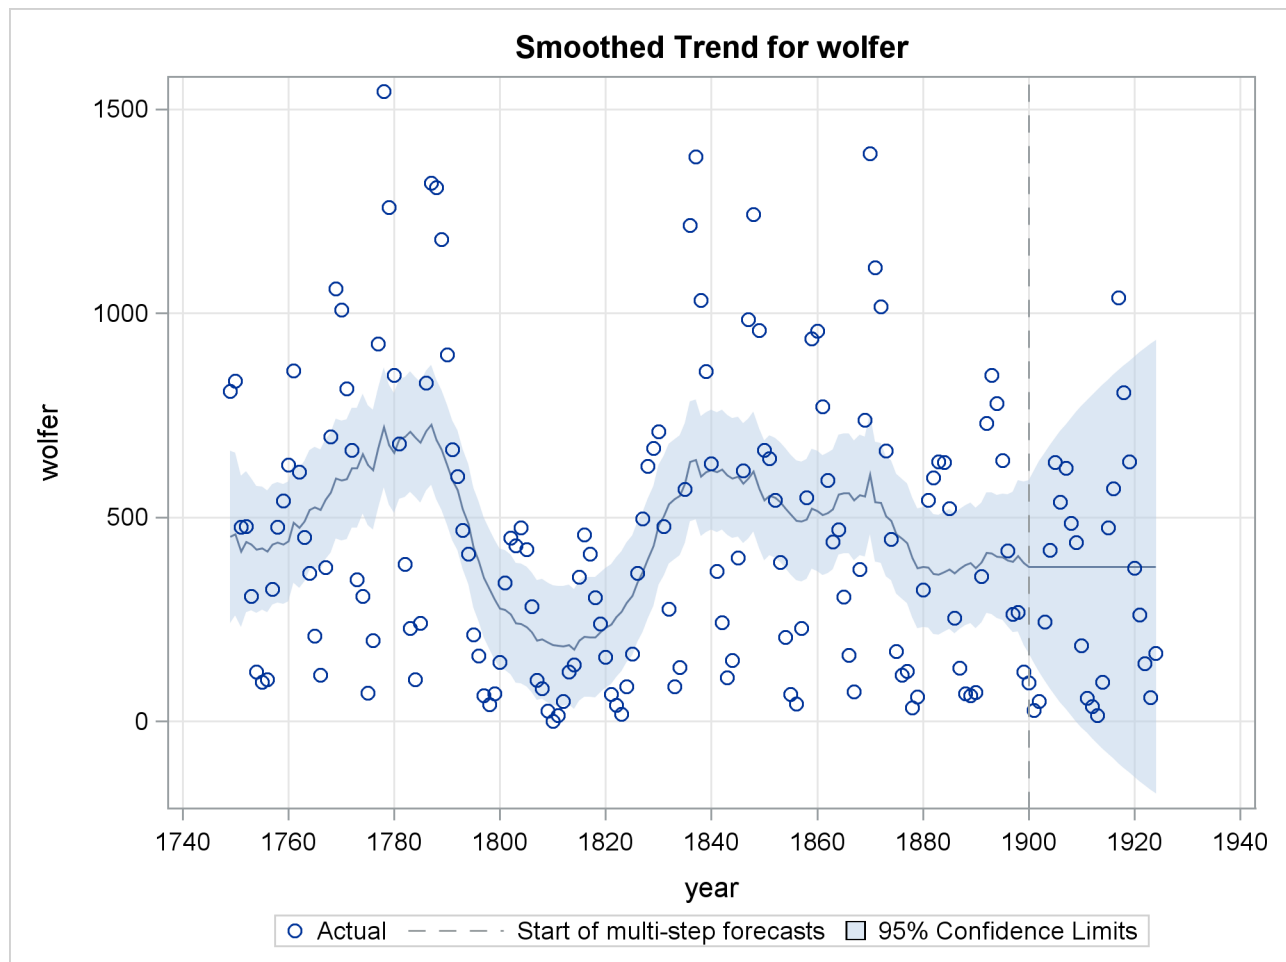
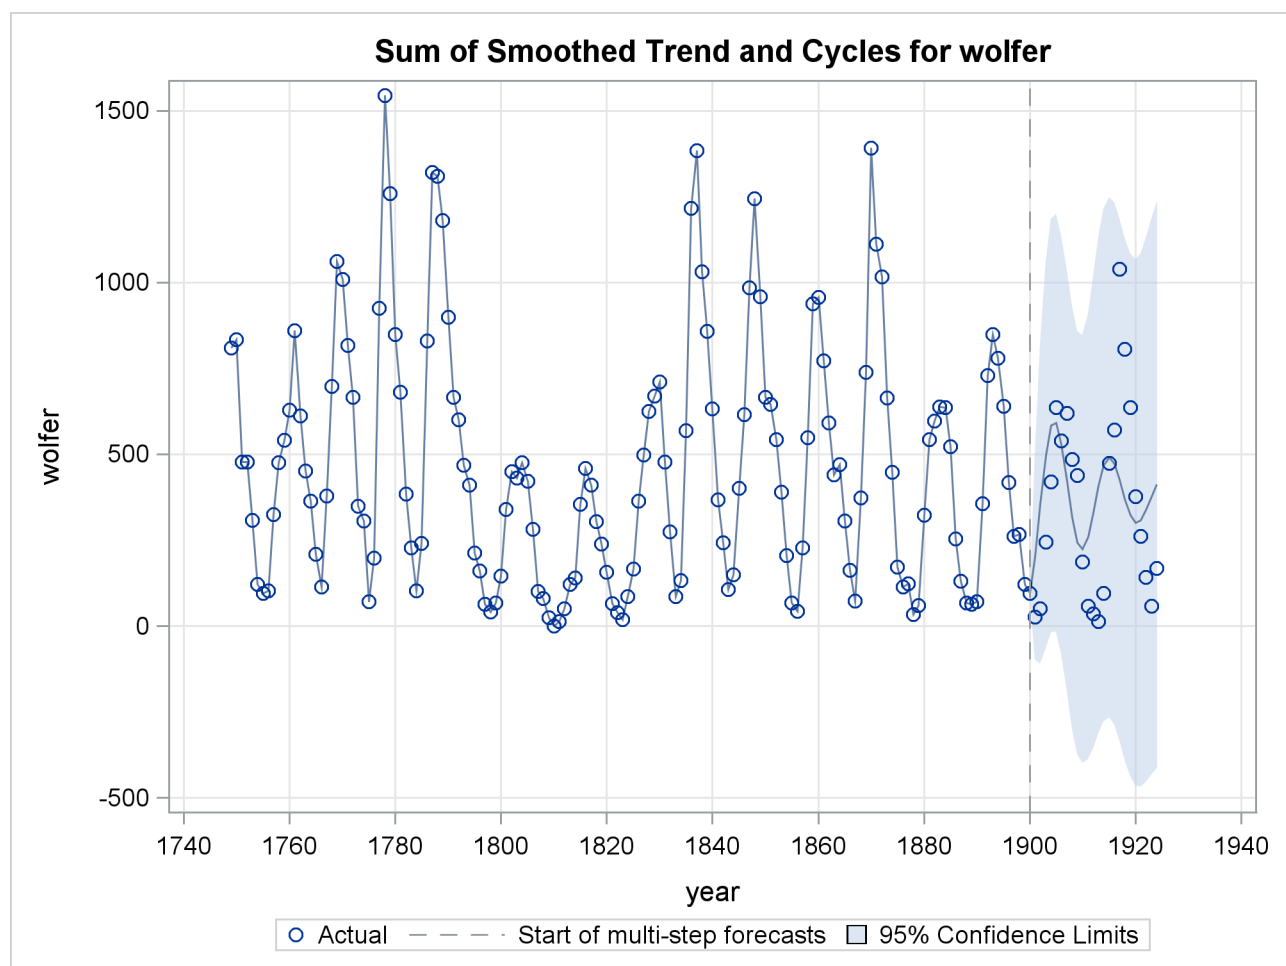
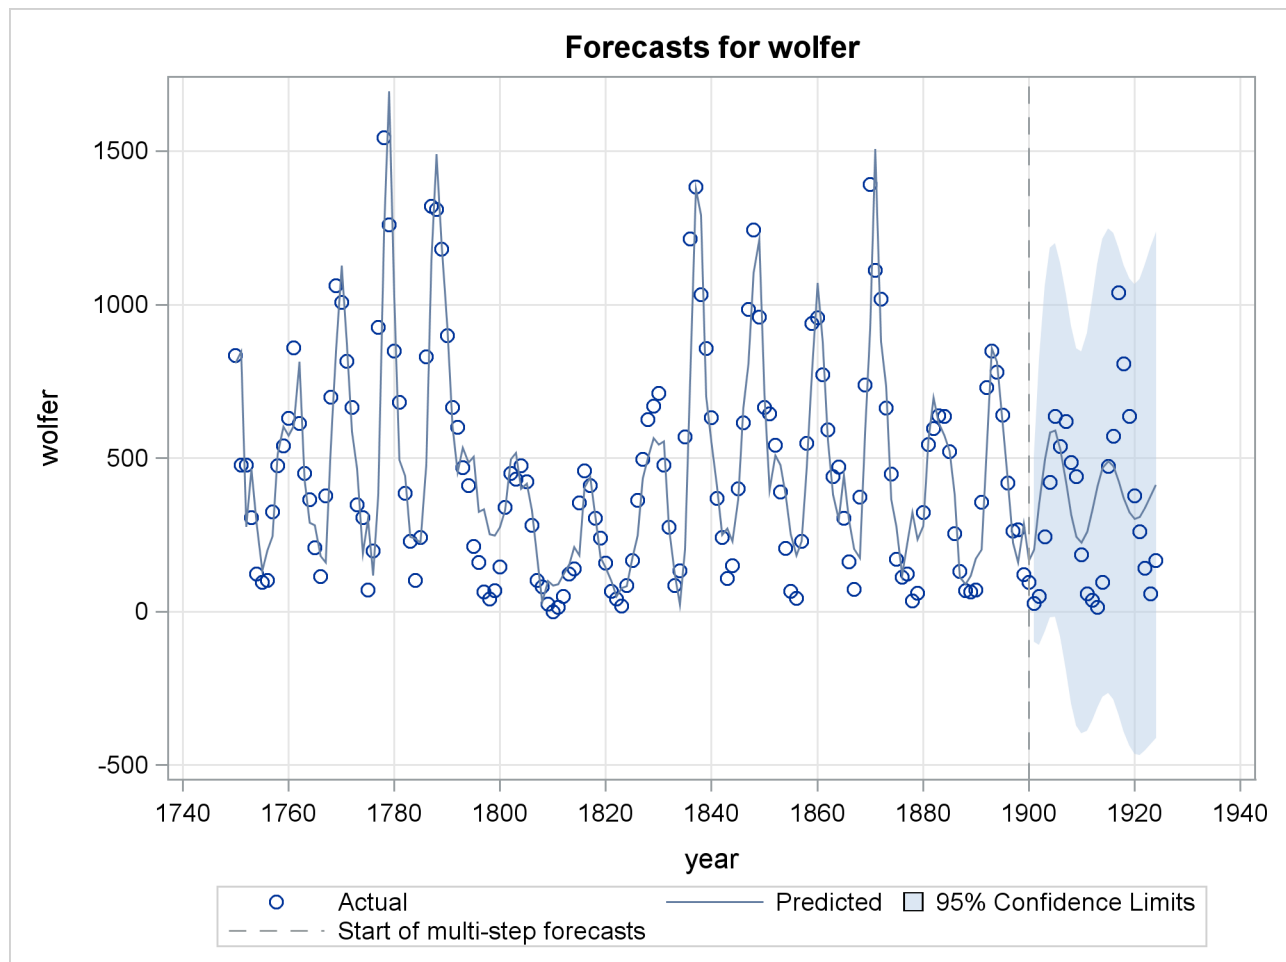
Figure 34.14 Sunspots Series: Smoothed Trend

Figure 34.15 Sunspots Series: Smoothed Trend plus Cycle

Finally, Figure 34.16 shows the forecast plot.

Figure 34.16 Sunspots Series: Series Forecasts



ODS Table Names

The UCM procedure assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in [Table 34.2](#).

Table 34.2 ODS Tables Produced by PROC UCM

ODS Table Name	Description	Statement	Option
Tables Summarizing the Estimation and Forecast Spans			
EstimationSpan	Estimation span summary information		default
ForecastSpan	Forecast span summary information		default

Table 34.2 *continued*

ODS Table Name	Description	Statement	Option
Tables Related to Model Parameters			
ConvergenceStatus	Convergence status of the estimation process		default
FixedParameters	Fixed parameters in the model		default
InitialParameters	Initial estimates of the free parameters		default
ParameterEstimates	Final estimates of the free parameters		default
Tables Related to Model Information and Diagnostics			
BlockSeasonDescription	Information about the block seasonals in the model		default
ComponentSignificance	Significance analysis of the components in the model		default
CycleDescription	Information about the cycles in the model		default
FitStatistics	Fit statistics based on the one-step-ahead predictions		default
FitSummary	Likelihood-based fit statistics		default
OutlierSummary	Summary table of the detected outliers		default
SeasonDescription	Information about the seasonals in the model		default
SeasonHarmonics	Summary of harmonics in a trigonometric seasonal component	SEASON	PRINT=HARMONICS
SplineSeasonDescription	Information about the spline-seasonals in the model		default
TrendInformation	Summary information of the level and slope components		default
Tables Related to Filtered Component Estimates			
FilteredAutoReg	Filtered estimate of an autoreg component	AUTOREG	PRINT=FILTER
FilteredBlockSeason	Filtered estimate of a block seasonal component	BLOCKSEASON	PRINT=FILTER
FilteredCycle	Filtered estimate of a cycle component	CYCLE	PRINT=FILTER
FilteredIrregular	Filtered estimate of the irregular component	IRREGULAR	PRINT=FILTER
FilteredLevel	Filtered estimate of the level component	LEVEL	PRINT=FILTER

Table 34.2 *continued*

ODS Table Name	Description	Statement	Option
FilteredRandomReg	Filtered estimate of the time-varying random-regression coefficient	RANDOMREG	PRINT=FILTER
FilteredSeason	Filtered estimate of a seasonal component	SEASON	PRINT=FILTER
FilteredSlope	Filtered estimate of the slope component	SLOPE	PRINT=FILTER
FilteredSplineReg	Filtered estimate of the time-varying spline-regression coefficient	SPLINEREG	PRINT=FILTER
FilteredSplineSeason	Filtered estimate of a spline-seasonal component	SPLINESEASON	PRINT=FILTER
Tables Related to Smoothed Component Estimates			
SmoothedAutoReg	Smoothed estimate of an autoreg component	AUTOREG	PRINT=SMOOTH
SmoothedBlockSeason	Smoothed estimate of a block seasonal component	BLOCKSEASON	PRINT=SMOOTH
SmoothedCycle	Smoothed estimate of the cycle component	CYCLE	PRINT=SMOOTH
SmoothedIrregular	Smoothed estimate of the irregular component	IRREGULAR	PRINT=SMOOTH
SmoothedLevel	Smoothed estimate of the level component	LEVEL	PRINT=SMOOTH
SmoothedRandomReg	Smoothed estimate of the time-varying random-regression coefficient	RANDOMREG	PRINT=SMOOTH
SmoothedSeason	Smoothed estimate of a seasonal component	SEASON	PRINT=SMOOTH
SmoothedSlope	Smoothed estimate of the slope component	SLOPE	PRINT=SMOOTH
SmoothedSplineReg	Smoothed estimate of the time-varying spline-regression coefficient	SPLINEREG	PRINT=SMOOTH
SmoothedSplineSeason	Smoothed estimate of a spline-seasonal component	SPLINESEASON	PRINT=SMOOTH
Tables Related to Series Decomposition and Forecasting			
FilteredAllExceptIrreg	Filtered estimate of sum of all components except the irregular component	FORECAST	PRINT=FDECOMP
FilteredTrend	Filtered estimate of trend	FORECAST	PRINT= FDECOMP
FilteredTrendReg	Filtered estimate of trend plus regression	FORECAST	PRINT=FDECOMP

Table 34.2 *continued*

ODS Table Name	Description	Statement	Option
FilteredTrendRegCyc	Filtered estimate of trend plus regression plus cycles and autoreg	FORECAST	PRINT=FDECOMP
Forecasts	Dependent series forecasts		default
PostSamplePrediction	Forecasting performance in the holdout period	FORECAST	BACK=
SmoothedAllExceptIrreg	Smoothed estimate of sum of all components except the irregular component	FORECAST	PRINT=DECOMP
SmoothedTrend	Smoothed estimate of trend	FORECAST	PRINT= DECOMP
SmoothedTrendReg	Smoothed estimate of trend plus regression	FORECAST	PRINT=DECOMP
SmoothedTrendRegCyc	Smoothed estimate of trend plus regression plus cycles and autoreg	FORECAST	PRINT=DECOMP

NOTE: The tables are related to a single series within a BY group. In the case of models that contain multiple cycles, seasonal components, or block seasonal components, the corresponding component estimate tables are sequentially numbered. For example, if a model contains two cycles and a seasonal component and the PRINT=SMOOTH option is used for each of them, the ODS tables containing the smoothed estimates will be named SmoothedCycle1, SmoothedCycle2, and SmoothedSeason. Note that the seasonal table is not numbered because there is only one seasonal component.

ODS Graph Names

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the ODS GRAPHICS ON statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

You can reference every graph produced through ODS Graphics with a name. The names of the graphs that PROC UCM generates are listed in [Table 34.3](#), along with the required statements and options.

Table 34.3 ODS Graphics Produced by PROC UCM

ODS Graph Name	Description	Statement	Option
Plots Related to Residual Analysis			
ErrorACFPlot	Prediction error autocorrelation plot	ESTIMATE	PLOT=ACF
ErrorPACFPlot	Prediction error partial-autocorrelation plot	ESTIMATE	PLOT=PACF
ErrorHistogram	Prediction error histogram	ESTIMATE	PLOT=NORMAL
ErrorQQPlot	Prediction error normal quantile plot	ESTIMATE	PLOT=QQ
ErrorPlot	Plot of prediction errors	ESTIMATE	PLOT=RESIDUAL
ErrorWhiteNoiseLogProbPlot	Plot of p -values at different lags for the Ljung-Box portmanteau white noise test statistics	ESTIMATE	PLOT=WN
CUSUMPlot	Plot of cumulative residuals	ESTIMATE	PLOT=CUSUM
CUSUMSQPlot	Plot of cumulative squared residuals	ESTIMATE	PLOT=CUSUMSQ
ModelPlot	Plot of one-step-ahead forecasts in the estimation span	ESTIMATE	PLOT=MODEL
PanelResidualPlot	Panel of residual diagnostic plots	ESTIMATE	PLOT=PANEL
ResidualLoessPlot	Time series plot of residuals with superimposed LOESS smoother	ESTIMATE	PLOT=LOESS
Plots Related to Filtered Component Estimates			
FilteredAutoregPlot	Plot of filtered autoreg component	AUTOREG	PLOT=FILTER
FilteredBlockSeasonPlot	Plot of filtered block season component	BLOCKSEASON	PLOT=FILTER
FilteredCyclePlot	Plot of filtered cycle component	CYCLE	PLOT=FILTER
FilteredIrregularPlot	Plot of filtered irregular component	IRREGULAR	PLOT=FILTER
FilteredLevelPlot	Plot of filtered level component	LEVEL	PLOT=FILTER
FilteredRandomRegPlot	Plot of filtered time-varying regression coefficient	RANDOMREG	PLOT=FILTER
FilteredSeasonPlot	Plot of filtered season component	SEASON	PLOT=FILTER
FilteredSlopePlot	Plot of filtered slope component	SLOPE	PLOT=FILTER
FilteredSplineRegPlot	Plot of filtered time-varying regression coefficient	SPLINEREG	PLOT=FILTER

Table 34.3 *continued*

ODS Graph Name	Description	Statement	Option
FilteredSplineSeasonPlot	Plot of filtered spline-season component	SPLINESEASON	PLOT=FILTER
AnnualSeasonPlot	Plot of annual variation in the filtered season component	SEASON	PLOT=F_ANNUAL
Plots Related to Smoothed Component Estimates			
SmoothedAutoregPlot	Plot of smoothed autoreg component	AUTOREG	PLOT=SMOOTH
SmoothedBlockSeasonPlot	Plot of smoothed block season component	BLOCKSEASON	PLOT=SMOOTH
SmoothedCyclePlot	Plot of smoothed cycle component	CYCLE	PLOT=SMOOTH
SmoothedIrregularPlot	Plot of smoothed irregular component	IRREGULAR	PLOT=SMOOTH
SmoothedLevelPlot	Plot of smoothed level component	LEVEL	PLOT=SMOOTH
SmoothedRandomRegPlot	Plot of smoothed time-varying regression coefficient	RANDOMREG	PLOT=SMOOTH
SmoothedSeasonPlot	Plot of smoothed season component	SEASON	PLOT=SMOOTH
SmoothedSlopePlot	Plot of smoothed slope component	SLOPE	PLOT=SMOOTH
SmoothedSplineRegPlot	Plot of smoothed time-varying regression coefficient	SPLINEREG	PLOT=SMOOTH
SmoothedSplineSeasonPlot	Plot of smoothed spline-season component	SPLINESEASON	PLOT=SMOOTH
AnnualSeasonPlot	Plot of annual variation in the smoothed season component	SEASON	PLOT=S_ANNUAL
Plots Related to Series Decomposition and Forecasting			
ForecastsOnlyPlot	Series forecasts beyond the historical period	FORECAST	DEFAULT
ForecastsPlot	One-step-ahead as well as multistep-ahead forecasts	FORECAST	PLOT=FORECASTS
FilteredAllExceptIrregPlot	Plot of sum of all filtered components except the irregular component	FORECAST	PLOT= FDECOMP
FilteredTrendPlot	Plot of filtered trend	FORECAST	PLOT= FDECOMP
FilteredTrendRegCycPlot	Plot of sum of filtered trend, cycles, and regression effects	FORECAST	PLOT= FDECOMP

Table 34.3 *continued*

ODS Graph Name	Description	Statement	Option
FilteredTrendRegPlot	Plot of filtered trend plus regression effects	FORECAST	PLOT= FDECOMP
SmoothedAllExceptIrregPlot	Plot of sum of all smoothed components except the irregular component	FORECAST	PLOT= DECOMP
SmoothedTrendPlot	Plot of smoothed trend	FORECAST	PLOT= TREND
SmoothedTrendRegPlot	Plot of smoothed trend plus regression effects	FORECAST	PLOT= DECOMP
SmoothedTrendRegCycPlot	Plot of sum of smoothed trend, cycles, and regression effects	FORECAST	PLOT= DECOMP
FilteredAllExceptIrregVarPlot	Plot of standard error of sum of all filtered components except the irregular	FORECAST	PLOT= FDECOMPVAR
FilteredTrendVarPlot	Plot of standard error of filtered trend	FORECAST	PLOT= FDECOMPVAR
FilteredTrendRegVarPlot	Plot of standard error of filtered trend plus regression effects	FORECAST	PLOT= FDECOMPVAR
FilteredTrendRegCycVarPlot	Plot of standard error of filtered trend, cycles, and regression effects	FORECAST	PLOT= FDECOMPVAR
SmoothedAllExceptIrregVarPlot	Plot of standard error of sum of all smoothed components except the irregular	FORECAST	PLOT= DECOMPVAR
SmoothedTrendVarPlot	Plot of standard error of smoothed trend	FORECAST	PLOT= DECOMPVAR
SmoothedTrendRegVarPlot	Plot of standard error of smoothed trend plus regression effects	FORECAST	PLOT= DECOMPVAR
SmoothedTrendRegCycVarPlot	Plot of standard error of smoothed trend, cycles, and regression effects	FORECAST	PLOT= DECOMPVAR

OUTFOR= Data Set

You can use the `OUTFOR=` option in the `FORECAST` statement to store the series and component forecasts produced by the procedure. This data set contains the following columns:

- the BY variables
- the ID variable. If an ID variable is not specified, then a numerical variable, `_ID_`, is created that contains the observation numbers from the input data set.
- the dependent series and the predictor series
- `FORECAST`, a numerical variable containing the one-step-ahead predicted values and the multistep forecasts
- `RESIDUAL`, a numerical variable containing the difference between the actual and forecast values
- `STD`, a numerical variable containing the standard error of prediction
- `LCL` and `UCL`, numerical variables containing the lower and upper forecast confidence limits
- `S_SERIES` and `VS_SERIES`, numerical variables containing the smoothed values of the dependent series and their variances
- `S_IRREG` and `VS_IRREG`, numerical variables containing the smoothed values of the irregular component and their variances. These variables are present only if the model has an irregular component.
- `F_LEVEL`, `VF_LEVEL`, `S_LEVEL`, and `VS_LEVEL`, numerical variables containing the filtered and smoothed values of the level component and the respective variances. These variables are present only if the model has a level component.
- `F_SLOPE`, `VF_SLOPE`, `S_SLOPE`, and `VS_SLOPE`, numerical variables containing the filtered and smoothed values of the slope component and the respective variances. These variables are present only if the model has a slope component.
- `F_AUTOREG`, `VF_AUTOREG`, `S_AUTOREG`, and `VS_AUTOREG`, numerical variables containing the filtered and smoothed values of the autoreg component and the respective variances. These variables are present only if the model has an autoreg component.
- `F_CYCLE`, `VF_CYCLE`, `S_CYCLE`, and `VS_CYCLE`, numerical variables containing the filtered and smoothed values of the cycle component and the respective variances. If there are multiple cycles in the model, these variables are sequentially numbered as `F_CYCLE1`, `F_CYCLE2`, etc. These variables are present only if the model has at least one cycle component.
- `F_SEASON`, `VF_SEASON`, `S_SEASON`, and `VS_SEASON`, numerical variables containing the filtered and smoothed values of the season component and the respective variances. If there are multiple seasons in the model, these variables are sequentially numbered as `F_SEASON1`, `F_SEASON2`, etc. These variables are present only if the model has at least one season component.

- F_BLKSEAS, VF_BLKSEAS, S_BLKSEAS, and VS_BLKSEAS, numerical variables containing the filtered and smoothed values of the blockseason component and the respective variances. If there are multiple block seasons in the model, these variables are sequentially numbered as F_BLKSEAS1, F_BLKSEAS2, etc.
- F_SPLSEAS, VF_SPLSEAS, S_SPLSEAS, and VS_SPLSEAS, numerical variables containing the filtered and smoothed values of the splinesseason component and the respective variances. If there are multiple spline seasons in the model, these variables are sequentially numbered as F_SPLSEAS1, F_SPLSEAS2, etc. These variables are present only if the model has at least one splinesseason component.
- Filtered and smoothed estimates, and their variances, of the time-varying regression coefficients of the variables specified in the RANDOMREG and SPLINEREG statements. A variable is not included if its coefficient is time-invariant, that is, if the associated disturbance variance is zero.
- S_TREG and VS_TREG, numerical variables containing the smoothed values of level plus regression component and their variances. These variables are present only if the model has at least one predictor variable or has dependent lags.
- S_TREGCYC and VS_TREGCYC, numerical variables containing the smoothed values of level plus regression plus cycle component and their variances. These variables are present only if the model has at least one cycle or an autoreg component.
- S_NOIRREG and VS_NOIRREG, numerical variables containing the smoothed values of the sum of all components except the irregular component and their variances. These variables are present only if the model has at least one seasonal or block seasonal component.

OUTEST= Data Set

You can use the OUTEST= option in the ESTIMATE statement to store the model parameters and the related estimation details. This data set contains the following columns:

- the BY variables
- COMPONENT, a character variable containing the name of the component corresponding to the parameter being described
- PARAMETER, a character variable containing the parameter name
- TYPE, a character variable indicating whether the parameter value was fixed by the user or estimated
- _STATUS_, a character variable indicating whether the parameter estimation process converged or failed or there was an error of some other kind
- ESTIMATE, a numerical variable containing the parameter estimate
- STD, a numerical variable containing the standard error of the parameter estimate. This has a missing value if the parameter value is fixed.

- TVALUE, a numerical variable containing the t -statistic. This has a missing value if the parameter value is fixed.
- PVALUE, a numerical variable containing the p -value. This has a missing value if the parameter value is fixed.

Statistics of Fit

This section explains the goodness-of-fit statistics reported to measure how well the specified model fits the data.

First the various statistics of fit that are computed using the prediction errors, $y_t - \hat{y}_t$, are considered. In these formulas, n is the number of nonmissing prediction errors and k is the number of fitted parameters in the model. Moreover, the sum of squared errors, $SSE = \sum (y_t - \hat{y}_t)^2$, and the total sum of squares for the series corrected for the mean, $SST = \sum (y_t - \bar{y})^2$, where \bar{y} is the series mean, and the sums are over all the nonmissing prediction errors.

Mean Squared Error

The mean squared prediction error, $MSE = \frac{1}{n}SSE$

Root Mean Squared Error

The root mean square error, $RMSE = \sqrt{MSE}$

Mean Absolute Percent Error

The mean absolute percent prediction error, $MAPE = \frac{100}{n} \sum_{t=1}^n |(y_t - \hat{y}_t)/y_t|$.

The summation ignores observations where $y_t = 0$.

R-square

The R-square statistic, $R^2 = 1 - SSE/SST$.

If the model fits the series badly, the model error sum of squares, SSE , might be larger than SST and the R-square statistic will be negative.

Adjusted R-square

The adjusted R-square statistic, $1 - (\frac{n-1}{n-k})(1 - R^2)$

Amemiya's Adjusted R-square

Amemiya's adjusted R-square, $1 - (\frac{n+k}{n-k})(1 - R^2)$

Random Walk R-square

The random walk R-square statistic (Harvey's R-square statistic that uses the random walk model for comparison), $1 - (\frac{n-1}{n})SSE/RWSSE$, where $RWSSE = \sum_{t=2}^n (y_t - y_{t-1} - \mu)^2$, and $\mu = \frac{1}{n-1} \sum_{t=2}^n (y_t - y_{t-1})$

Maximum Percent Error

The largest percent prediction error, $100 \max((y_t - \hat{y}_t)/y_t)$. In this computation the observations where $y_t = 0$ are ignored.

The likelihood-based fit statistics are reported separately (see the section “[The UCMs as State Space Models](#)” on page 2150). They include the full log likelihood (L_∞), the diffuse part of the log likelihood, the normalized residual sum of squares, and several information criteria: AIC, AICC, HQIC, BIC, and CAIC. Let q denote the number of estimated parameters, n be the number of nonmissing measurements in the

estimation span, and d be the number of diffuse elements in the initial state vector that are successfully initialized during the Kalman filtering process. Moreover, let $n^* = (n - d)$. The reported information criteria, all in smaller-is-better form, are described in Table 34.4:

Table 34.4 Information Criteria

Criterion	Formula	Reference
AIC	$-2L_\infty + 2q$	Akaike (1974)
AICC	$-2L_\infty + 2qn^*/(n^* - q - 1)$	Hurvich and Tsai (1989) Burnham and Anderson (1998)
HQIC	$-2L_\infty + 2q \log \log(n^*)$	Hannan and Quinn (1979)
BIC	$-2L_\infty + q \log(n^*)$	Schwarz (1978)
CAIC	$-2L_\infty + q(\log(n^*) + 1)$	Bozdogan (1987)

Examples: UCM Procedure

Example 34.1: The Airline Series Revisited

The series in this example, the monthly airline passenger series, has already been discussed earlier; see the section “A Seasonal Series with Linear Trend” on page 2107. Recall that the series consists of monthly numbers of international airline travelers (from January 1949 to December 1960). Here additional output features of the UCM procedure are illustrated, such as how to use the ESTIMATE and FORECAST statements to limit the span of the data used in parameter estimation and forecasting. The following statements fit a BSM to the logarithm of the airline passenger numbers. The disturbance variance for the slope component is held fixed at value 0; that is, the trend is locally linear with constant slope. In order to evaluate the performance of the fitted model on observed data, some of the observed data are withheld during parameter estimation and forecast computations. The observations in the last two years, years 1959 and 1960, are not used in parameter estimation, while the observations in the last year, year 1960, are not used in the forecasting computations. This is done using the BACK= option in the ESTIMATE and FORECAST statements. In addition, a panel of residual diagnostic plots is obtained using the PLOT=PANEL option in the ESTIMATE statement.

```
data seriesG;
  set sashelp.air;
  logair = log(air);
run;
```

```

proc ucm data = seriesG;
  id date interval = month;
  model logair;
  irregular;
  level;
  slope var = 0 noest;
  season length = 12 type=trig;
  estimate back=24 plot=panel;
  forecast back=12 lead=24 print=forecasts;
run;

```

The following tables display the summary of data used in estimation and forecasting ([Output 34.1.1](#) and [Output 34.1.2](#)). These tables provide simple summary statistics for the estimation and forecast spans; they include useful information such as the beginning and ending dates of the span, the number of nonmissing values, etc.

Output 34.1.1 Observation Span Used in Parameter Estimation (partial output)

Variable	Type	First	Last	Nobs	Mean
logair	Dependent	JAN1949	DEC1958	120	5.43035

Output 34.1.2 Observation Span Used in Forecasting (partial output)

Variable	Type	First	Last	Nobs	Mean
logair	Dependent	JAN1949	DEC1959	132	5.48654

The following tables display the fixed parameters in the model, the preliminary estimates of the free parameters, and the final estimates of the free parameters ([Output 34.1.3](#), [Output 34.1.4](#), and [Output 34.1.5](#)).

Output 34.1.3 Fixed Parameters in the Model

The UCM Procedure		
Fixed Parameters in the Model		
Component	Parameter	Value
Slope	Error Variance	0

Output 34.1.4 Starting Values for the Parameters to Be Estimated

Preliminary Estimates of the Free Parameters		
Component	Parameter	Estimate
Irregular	Error Variance	6.64120
Level	Error Variance	2.49045
Season	Error Variance	1.26676

Output 34.1.5 Maximum Likelihood Estimates of the Free Parameters

Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Irregular	Error Variance	0.00018686	0.0001212	1.54	0.1233
Level	Error Variance	0.00040314	0.0001566	2.57	0.0100
Season	Error Variance	0.00000350	1.66319E-6	2.10	0.0354

Two types of goodness-of-fit statistics are reported after a model is fit to the series (see [Output 34.1.6](#) and [Output 34.1.7](#)). The first type is the likelihood-based goodness-of-fit statistics, which include the full likelihood of the data, the diffuse portion of the likelihood (see the section “[Details: UCM Procedure](#)” on page 2144), and the information criteria. The second type of statistics is based on the raw residuals, residual = observed – predicted. If the model is nonstationary, then one-step-ahead predictions are not available for some initial observations, and the number of values used in computing these fit statistics will be different from those used in computing the likelihood-based test statistics.

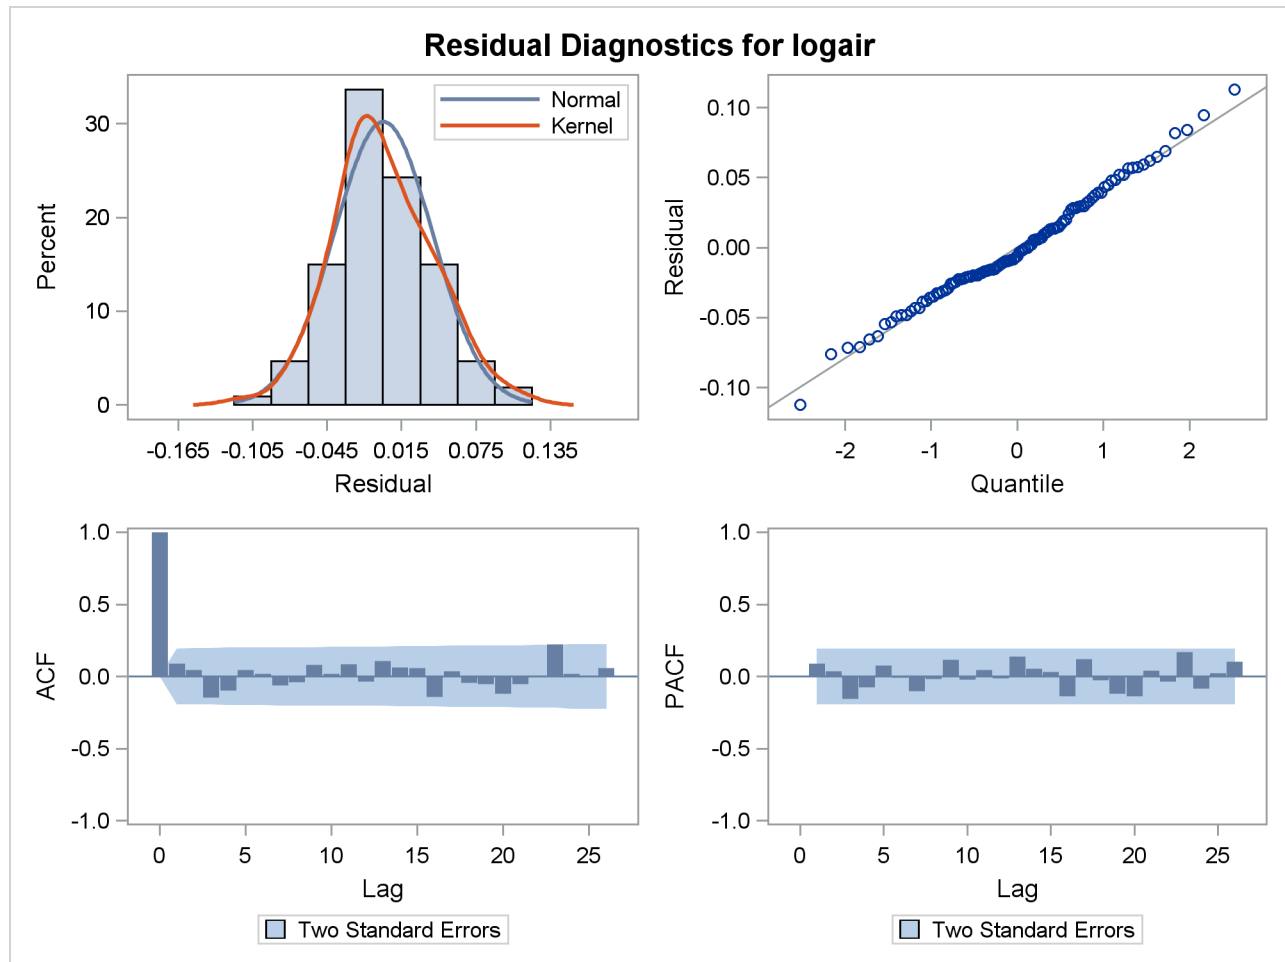
Output 34.1.6 Likelihood-Based Fit Statistics for the Airline Data

Likelihood Based Fit Statistics	
Statistic	Value
Full Log Likelihood	180.63
Diffuse Part of Log Likelihood	-13.93
Non-Missing Observations Used	120
Estimated Parameters	3
Initialized Diffuse State Elements	13
Normalized Residual Sum of Squares	107
AIC (smaller is better)	-355.3
BIC (smaller is better)	-347.2
AICC (smaller is better)	-355
HQIC (smaller is better)	-352
CAIC (smaller is better)	-344.2

Output 34.1.7 Residuals-Based Fit Statistics for the Airline Data

Fit Statistics Based on Residuals	
Mean Squared Error	0.00156
Root Mean Squared Error	0.03944
Mean Absolute Percentage Error	0.57677
Maximum Percent Error	2.19396
R-Square	0.98705
Adjusted R-Square	0.98680
Random Walk R-Square	0.86370
Amemiya's Adjusted R-Square	0.98630
Number of non-missing residuals used for computing the fit statistics = 107	

The diagnostic plots based on the one-step-ahead residuals are shown in [Output 34.1.8](#). The residual histogram and the Q-Q plot show no reasons to question the approximate normality of the residual distribution. The remaining plots check for the *whiteness* of the residuals. The sample correlation plots, the autocorrelation function (ACF) and the partial autocorrelation function (PACF), also do not show any significant violations of the whiteness of the residuals. Therefore, on the whole, the model seems to fit the data well.

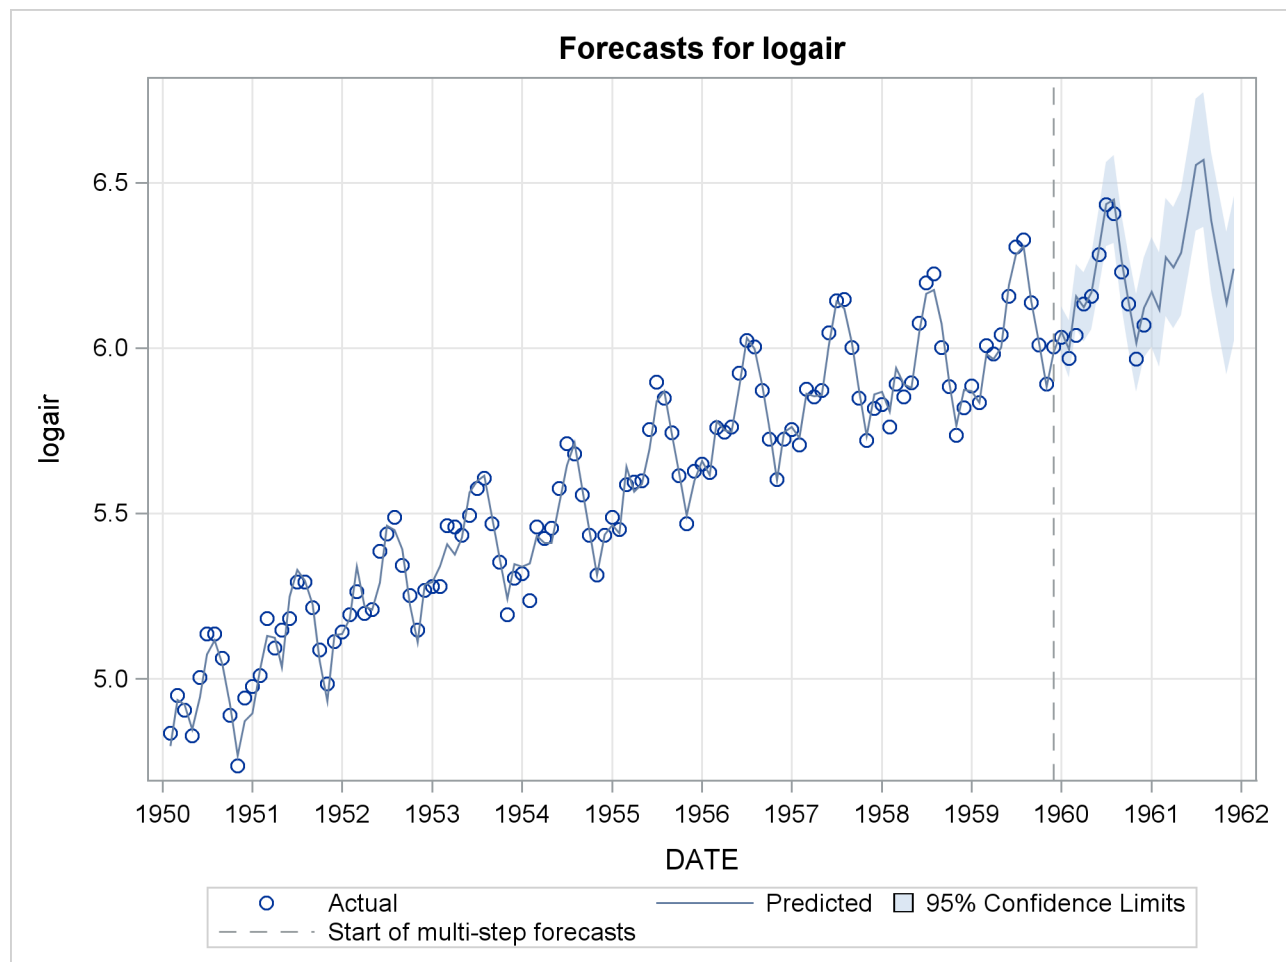
Output 34.1.8 Residual Diagnostics for the Airline Series Using a BSM

The forecasts are given in [Output 34.1.9](#). In order to save the space, the upper and lower confidence limit columns are dropped from the output, and only the rows corresponding to the year 1960 are shown. Recall that the actual measurements in the years 1959 and 1960 were withheld during the parameter estimation, and the ones in 1960 were not used in the forecast computations.

Output 34.1.9 Forecasts for the Airline Data

	Obs	date	Forecast	StdErr	logair	Residual
	133	JAN60	6.050	0.038	6.033	-0.017
	134	FEB60	5.996	0.044	5.969	-0.027
	135	MAR60	6.156	0.049	6.038	-0.118
	136	APR60	6.124	0.053	6.133	0.010
	137	MAY60	6.168	0.058	6.157	-0.011
	138	JUN60	6.303	0.061	6.282	-0.021
	139	JUL60	6.435	0.065	6.433	-0.002
	140	AUG60	6.450	0.068	6.407	-0.043
	141	SEP60	6.265	0.071	6.230	-0.035
	142	OCT60	6.138	0.073	6.133	-0.005
	143	NOV60	6.015	0.075	5.966	-0.049
	144	DEC60	6.121	0.077	6.068	-0.053

The figure [Output 34.1.10](#) shows the forecast plot. The forecasts in the year 1960 show that the model predictions were quite good.

Output 34.1.10 Forecast Plot of the Airline Series Using a BSM

Example 34.2: Variable Star Data

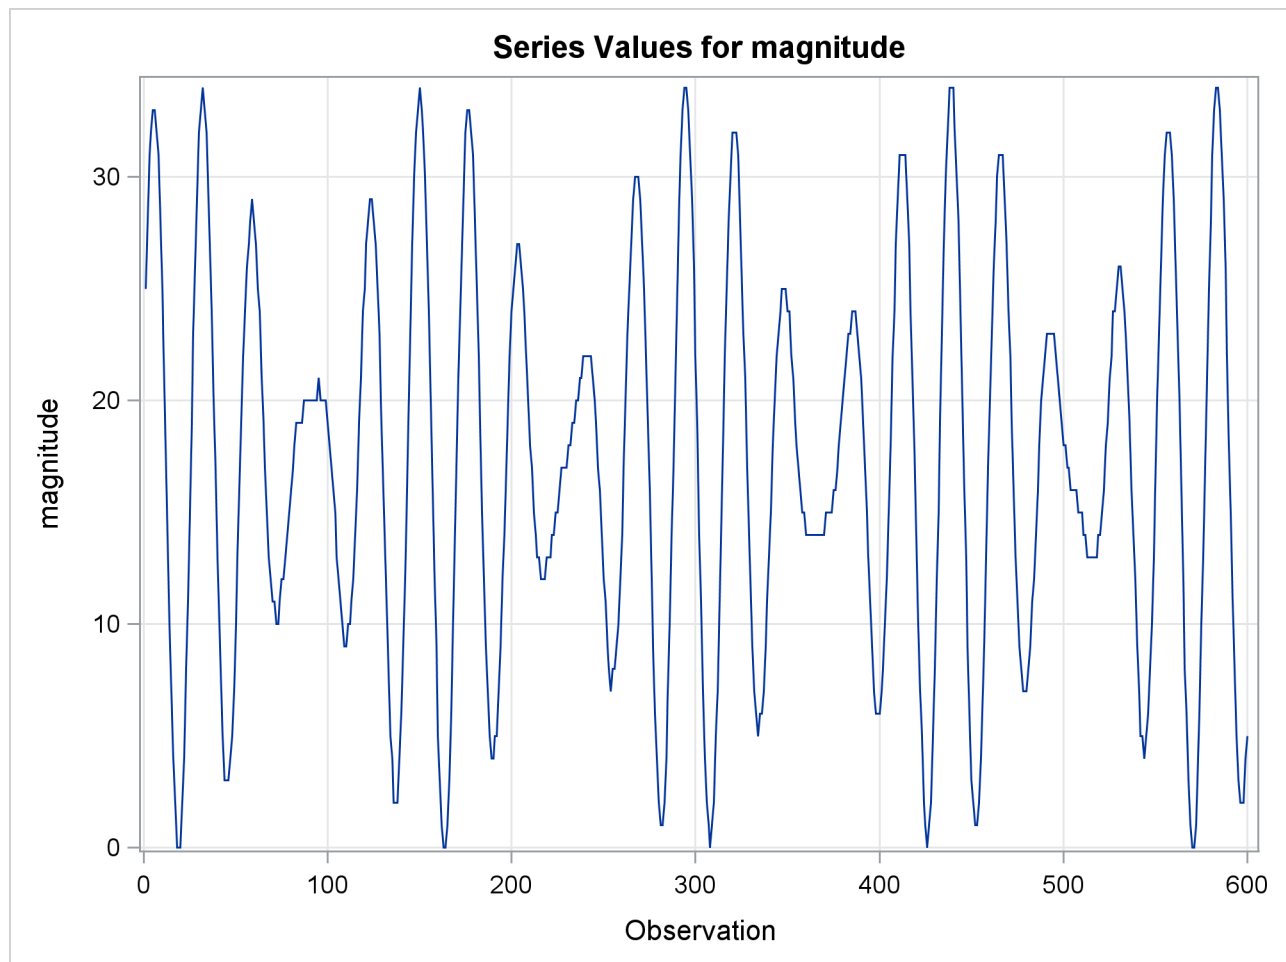
The series in this example is studied in detail in Bloomfield (2000). This series consists of brightness measurements (magnitude) of a variable star taken at midnight for 600 consecutive days. The data can be downloaded from a time series archive maintained by the University of York, England (<http://www.york.ac.uk/depts/maths/data/ts/welcome.htm> (series number 26)). The following DATA step statements read the data in a SAS data set.

```
data star;
  input magnitude @@;
  day = _n_;
datalines;
  25 28 31 32 33 33 32 31 28 25 22 18
  14 10 7 4 2 0 0 0 2 4 8 11
  15 19 23 26 29 32 33 34 33 32 30 27
  24 20 17 13 10 7 5 3 3 3 4 5
  7 10 13 16 19 22 24 26 27 28 29 28
  27 25 24 21 19 17 15 13 12 11 11 10

  ... more lines ...
```

The following statements use the TIMESERIES procedure to get a timeseries plot of the series (see [Output 34.2.1](#)).

```
proc timeseries data=star plot=series;
  var magnitude;
run;
```

Output 34.2.1 Plot of Star Brightness on Successive Days

The plot clearly shows the cyclic nature of the series. Bloomfield shows that the series is very well explained by a model that includes two deterministic cycles that have periods 29.0003 and 24.0001 days, a constant term, and a simple error term. He also mentions the difficulty involved in estimating the periods from the data (see Bloomfield 2000, Chapter 3). In his case the cycle periods are estimated by least squares, and the sum of squares surface has multiple local optima and ridges. The following statements show how to use the UCM procedure to fit this two-cycle model to the series. The constant term in the model is specified by holding the variance parameter of the level component to zero.

```
proc ucm data=star;
  model magnitude;
  irregular;
  level var=0 noest;
  cycle;
  cycle;
  estimate;
run;
```

The final parameter estimates and the goodness-of-fit statistics are shown in [Output 34.2.2](#) and [Output 34.2.3](#), respectively. The model fit appears to be good.

Output 34.2.2 Two-Cycle Model: Parameter Estimates

The UCM Procedure					
Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Irregular	Error Variance	0.09257	0.0053845	17.19	<.0001
Cycle_1	Damping Factor	1.00000	1.81175E-7	5519514	<.0001
Cycle_1	Period	29.00036	0.0022709	12770.4	<.0001
Cycle_1	Error Variance	0.00000882	5.27213E-6	1.67	0.0944
Cycle_2	Damping Factor	1.00000	2.11939E-7	4718334	<.0001
Cycle_2	Period	24.00011	0.0019128	12547.2	<.0001
Cycle_2	Error Variance	0.00000535	3.56374E-6	1.50	0.1330

Output 34.2.3 Two-Cycle Model: Goodness of Fit

Fit Statistics Based on Residuals	
Mean Squared Error	0.12072
Root Mean Squared Error	0.34745
Mean Absolute Percentage Error	2.65141
Maximum Percent Error	36.38991
R-Square	0.99850
Adjusted R-Square	0.99849
Random Walk R-Square	0.97281
Amemiya's Adjusted R-Square	0.99847
Number of non-missing residuals used for computing the fit statistics = 599	

A summary of the cycles in the model is given in [Output 34.2.4](#).

Output 34.2.4 Two-Cycle Model: Summary

Name	Type	period	Rho	ErrorVar
Cycle_1	Stationary	29.00036	1.00000	0.00000882
Cycle_2	Stationary	24.00011	1.00000	0.00000535

Note that the estimated periods are the same as in Bloomfield's model, the damping factors are nearly equal to 1.0, and the disturbance variances are very close to zero, implying persistent deterministic cycles. In fact, this model is identical to Bloomfield's model.

Example 34.3: Modeling Long Seasonal Patterns

This example illustrates some of the techniques you can use to model long seasonal patterns in a series. If the seasonal pattern is of moderate length and the underlying dynamics are simple, then it is easily modeled by using the basic settings of the SEASON statement and these additional techniques are not needed. However, if the seasonal pattern has a long season length and/or has a complex stochastic dynamics, then the techniques discussed here can be useful. You can obtain parsimonious models for a long seasonal pattern by using an appropriate subset of trigonometric harmonics, or by using a suitable spline function, or by using a block-season pattern in combination with a seasonal component of much smaller length. You can also vary the disturbance variances of the subcomponents that combine to form the seasonal component.

The time series used in this example consists of number of calls received per shift at a call center. Each shift is six hours long, and the first shift of the day begins at midnight, resulting in four shifts per day. The observations are available from December 15, 1999, to April 30, 2000. This series is seasonal with season length 28, which is moderate, and in fact there is no particular need to use pattern approximation techniques in this case. However, it is adequate for demonstration purposes. The plan of this example is as follows. First an initial model with a full seasonal component is created. This model is used as a baseline for comparing alternate models created by the techniques that are being illustrated. In practice any candidate model is first checked for adequacy by using various diagnostic procedures. In this illustration the main focus is on the different ways a long seasonal pattern can be modeled and no model diagnostics are done for the models being entertained. The alternate models are compared by using the sum of absolute prediction errors in the holdout region.

The following DATA step statements create the input data set used in this example.

```
data callCenter;
  input calls @@;
  label calls= "Number of Calls Received in a 6 Hour Shift";
  start = '15dec99:00:00'dt;
  datetime = INTNX( 'dthour6', start, _n_-1 );
  format datetime datetime10.;
datalines;
  18    122    244    128    19    113    230    119    17    112
  219    93    14    73    139    53    11    32    74    56
  15    137    289    153    20    125    227    106    16    101

  ... more lines ...
```

Initial exploration of the series clearly indicates that the series does not show any significant trend, and time of day and day of the week have a significant influence on the number of calls received. These considerations suggest a simple random walk trend model along with a seasonal component of season length 28, the total number of shifts in a week. The following statements specify this model. Note the PRINT=HARMONICS option in the SEASON statement, which produces a table that lists the full set of harmonics contributing to the seasonal along with the significance of their contribution. This table will be useful later in choosing a subset trigonometric model. The BACK=28 and the LEAD=28 specifications in the FORECAST statement create a holdout region of 28 observations. The sum of absolute prediction errors (SAE) in this holdout region are used to compare the different models.

```

proc ucm data=callCenter;
  id datetime interval=dthour6;
  model calls;
  irregular;
  level;
  season length=28 type=trig
    print=(harmonics);
  estimate back=28;
  forecast back=28 lead=28;
run;

```

The forecasting performance of this model in the holdout region is shown in [Output 34.3.1](#). The sum of absolute prediction errors $SAE = 516.22$, which appears in the last row of the holdout analysis table.

Output 34.3.1 Predictions in the Holdout Region: Baseline Model

Obs	datetime	Actual	Forecast	Error	SAE
525	24APR00:00	12	-4.004	16.004	16.004
526	24APR00:06	136	110.825	25.175	41.179
527	24APR00:12	295	262.820	32.180	73.360
528	24APR00:18	172	145.127	26.873	100.232
529	25APR00:00	20	2.188	17.812	118.044
530	25APR00:06	127	105.442	21.558	139.602
531	25APR00:12	236	217.043	18.957	158.559
532	25APR00:18	125	114.313	10.687	169.246
533	26APR00:00	16	2.855	13.145	182.391
534	26APR00:06	108	95.202	12.798	195.189
535	26APR00:12	207	194.184	12.816	208.005
536	26APR00:18	112	97.687	14.313	222.317
537	27APR00:00	15	1.270	13.730	236.047
538	27APR00:06	98	85.875	12.125	248.172
539	27APR00:12	200	184.891	15.109	263.281
540	27APR00:18	113	93.113	19.887	283.168
541	28APR00:00	15	-1.120	16.120	299.288
542	28APR00:06	104	84.983	19.017	318.305
543	28APR00:12	205	177.940	27.060	345.365
544	28APR00:18	89	64.292	24.708	370.073
545	29APR00:00	12	-6.020	18.020	388.093
546	29APR00:06	68	46.286	21.714	409.807
547	29APR00:12	116	100.339	15.661	425.468
548	29APR00:18	54	34.700	19.300	444.768
549	30APR00:00	10	-6.209	16.209	460.978
550	30APR00:06	30	12.167	17.833	478.811
551	30APR00:12	66	49.524	16.476	495.287
552	30APR00:18	61	40.071	20.929	516.216

Now that a baseline model is created, the exploration for alternate models can begin. The review of the harmonic table in [Output 34.3.2](#) shows that all but the last three harmonics are significant, and deleting any of them to form a subset trigonometric seasonal component will lead to a poorer model. The last three harmonics, 12th, 13th and 14th, with periods of 2.333, 2.15 and 2.0, respectively, do appear to be possible choices for deletion. Note that the disturbance variance of the seasonal component is not very insignificant (see [Output 34.3.3](#)); therefore the seasonal component is stochastic and the preceding logic, which is based on the final state estimate, provides only a rough guideline.

Output 34.3.2 Harmonic Analysis of the Season: Initial Model

The UCM Procedure						
Harmonic Analysis of Trigonometric Seasons (Based on the Final State)						
Name	Season Length	Harmonic	Period	Chi-Square	DF	Pr > ChiSq
Season	28	1	28.00000	234.19	2	<.0001
Season	28	2	14.00000	264.19	2	<.0001
Season	28	3	9.33333	95.65	2	<.0001
Season	28	4	7.00000	105.64	2	<.0001
Season	28	5	5.60000	146.74	2	<.0001
Season	28	6	4.66667	121.93	2	<.0001
Season	28	7	4.00000	4299.12	2	<.0001
Season	28	8	3.50000	150.79	2	<.0001
Season	28	9	3.11111	89.68	2	<.0001
Season	28	10	2.80000	8.95	2	0.0114
Season	28	11	2.54545	6.14	2	0.0464
Season	28	12	2.33333	2.20	2	0.3325
Season	28	13	2.15385	3.40	2	0.1828
Season	28	14	2.00000	2.33	1	0.1272

Output 34.3.3 Parameter Estimates: Initial Model

Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Irregular	Error Variance	92.14591	13.10986	7.03	<.0001
Level	Error Variance	44.83595	10.65465	4.21	<.0001
Season	Error Variance	0.01250	0.0065153	1.92	0.0551

The following statements fit a subset trigonometric model formed by dropping the last three harmonics by specifying the DROPH= option in the SEASON statement:

```
proc ucm data=callCenter;
  id datetime interval=dthour6;
  model calls;
  irregular;
  level;
  season length=28 type=trig droph=12 13 14;
  estimate back=28;
  forecast back=28 lead=28;
run;
```

The last row of the holdout region prediction analysis table for the preceding model is shown in [Output 34.3.4](#). It shows that the subset trigonometric model has better prediction performance in the holdout region than the full trigonometric model, its SAE = 471.53 compared to the SAE = 516.22 for the full model.

Output 34.3.4 SAE for the Subset Trigonometric Model

Obs	datetime	Actual	Forecast	Error	SAE
552	30APR00:18	61	40.836	20.164	471.534

The following statements illustrate a spline approximation to this seasonal component. In the spline specification the knot placement is quite important, and usually some experimentation is needed. In the following model the knots are placed at the beginning and the middle of each day. Note that the knots at the beginning and end of the season, 1 and 28 in this case, should not be listed in the knot list because knots are always placed there anyway.

```
proc ucm data=callCenter;
  id datetime interval=dthour6;
  model calls;
  irregular;
  level;
  splinesseason length=28
    knots=3 5 7 9 11 13 15 17 19 21 23 25 27
    degree=3;
  estimate back=28;
  forecast back=28 lead=28;
run;
```

The spline season model takes about half the time to fit that the baseline model takes. The last row of the holdout region prediction analysis table for this model is shown in [Output 34.3.5](#), which shows that the spline season model performs even better than the previous two models in the holdout region, its SAE = 313.79 compared to SAE = 471.53 for the previous model.

Output 34.3.5 SAE for the Spline Season Model

Obs	datetime	Actual	Forecast	Error	SAE
552	30APR00:18	61	23.350	37.650	313.792

The following statements illustrate yet another way to approximate a long seasonal component. Here a combination of BLOCKSEASON and SEASON statements results in a seasonal component that is a sum of two seasonal patterns: one seasonal pattern is simply a regular season with season length 4 that captures the *within-day* seasonal pattern, and the other seasonal pattern is a block seasonal pattern that remains constant during the day but varies from day to day within a week. Note the use of NLOPTIONS statement to change the optimization technique during the parameter estimation to DBLDOG, which in this case performs better than the default technique, TRUREG.

```
proc ucm data=callCenter;
  id datetime interval=dthour6;
  model calls;
  irregular;
  level;
  season length=4 type=trig;
  nloptions dbldog;
```

```

blockseason nblocks=7 blocksize=4
      type=trig;
estimate back=28;
forecast back=28 lead=28;
nloptions tech=dbldog;
run;

```

This model also takes about half the time to fit that the baseline model takes. The last row of the holdout region prediction analysis table for this model is shown in [Output 34.3.6](#), which shows that the block season model does slightly better than the baseline model but not as good as the other two models, its SAE = 508.52 compared to the SAE = 516.22 of the baseline model.

Output 34.3.6 SAE for the Block Season Model

Obs	datetime	Actual	Forecast	Error	SAE
552	30APR00:18	61	39.339	21.661	508.522

This example showed a few different ways to model a long seasonal pattern. It showed that parsimonious models for long seasonal patterns can be useful, and in some cases even more effective than the full model. Moreover, for very long seasonal patterns the high memory requirements and long computing times might make full models impractical.

Example 34.4: Modeling Time-Varying Regression Effects

In April 1979 the Albuquerque Police Department began a special enforcement program aimed at reducing the number of DWI (driving while intoxicated) accidents. The program was administered by a squad of police officers, who used breath alcohol testing (BAT) devices and a van that houses a BAT device (Batmobile). These data were collected by the Division of Governmental Research of the University of New Mexico, under a contract with the National Highway Traffic Safety Administration of the U.S. Department of Transportation, to evaluate the Batmobile program. The first 29 observations are for a control period, and the next 23 observations are for the experimental (Batmobile) period. The data, freely available at <http://lib.stat.cmu.edu/DASL/Datafiles/batdat.html>, consist of two variables: ACC, which represents injuries and fatalities from Wednesday to Saturday nighttime accidents, and FUEL, which represents fuel consumption (millions of gallons) in Albuquerque. The variables are measured quarterly starting from the first quarter of 1972 up to the last quarter of 1984, covering the span of 13 years. The following DATA step statements create the input data set.

```

data bat;
  input ACC FUEL @@;
  batProgram = 0;
  if _n_ > 29 then batProgram = 1;
  date = INTNX( 'qtr', '1jan1972'd, _n_- 1 );
  format date qtr8.;
datalines;
192    32.592    238    37.250    232    40.032
246    35.852    185    38.226    274    38.711
266    43.139    196    40.434    170    35.898
234    37.111    272    38.944    234    37.717
210    37.861    280    42.524    246    43.965
248    41.976    269    42.918    326    49.789
342    48.454    257    45.056    280    49.385
290    42.524    356    51.224    295    48.562
279    48.167    330    51.362    354    54.646
331    53.398    291    50.584    377    51.320
327    50.810    301    46.272    269    48.664
314    48.122    318    47.483    288    44.732
242    46.143    268    44.129    327    46.258
253    48.230    215    46.459    263    50.686
319    49.681    263    51.029    206    47.236
286    51.717    323    51.824    306    49.380
230    47.961    304    46.039    311    55.683
292    52.263
;

```

There are a number of ways to study these data and the question of the effectiveness of the BAT program. One possibility is to study the *before-after* difference in the injuries and fatalities per million gallons of fuel consumed, by regressing ACC on the FUEL and the dummy variable BATPROGRAM, which is zero before the program began and one while the program is in place. However, it is possible that the effect of the Batmobiles might well be cumulative, because as awareness of the program becomes dispersed, its effectiveness as a deterrent to driving while intoxicated increases. This suggests that the regression coefficient of the BATPROGRAM variable might be *time varying*. The following program fits a model that incorporates these considerations. A seasonal component is included in the model since it is easy to see that the data show strong quarterly seasonality.

```

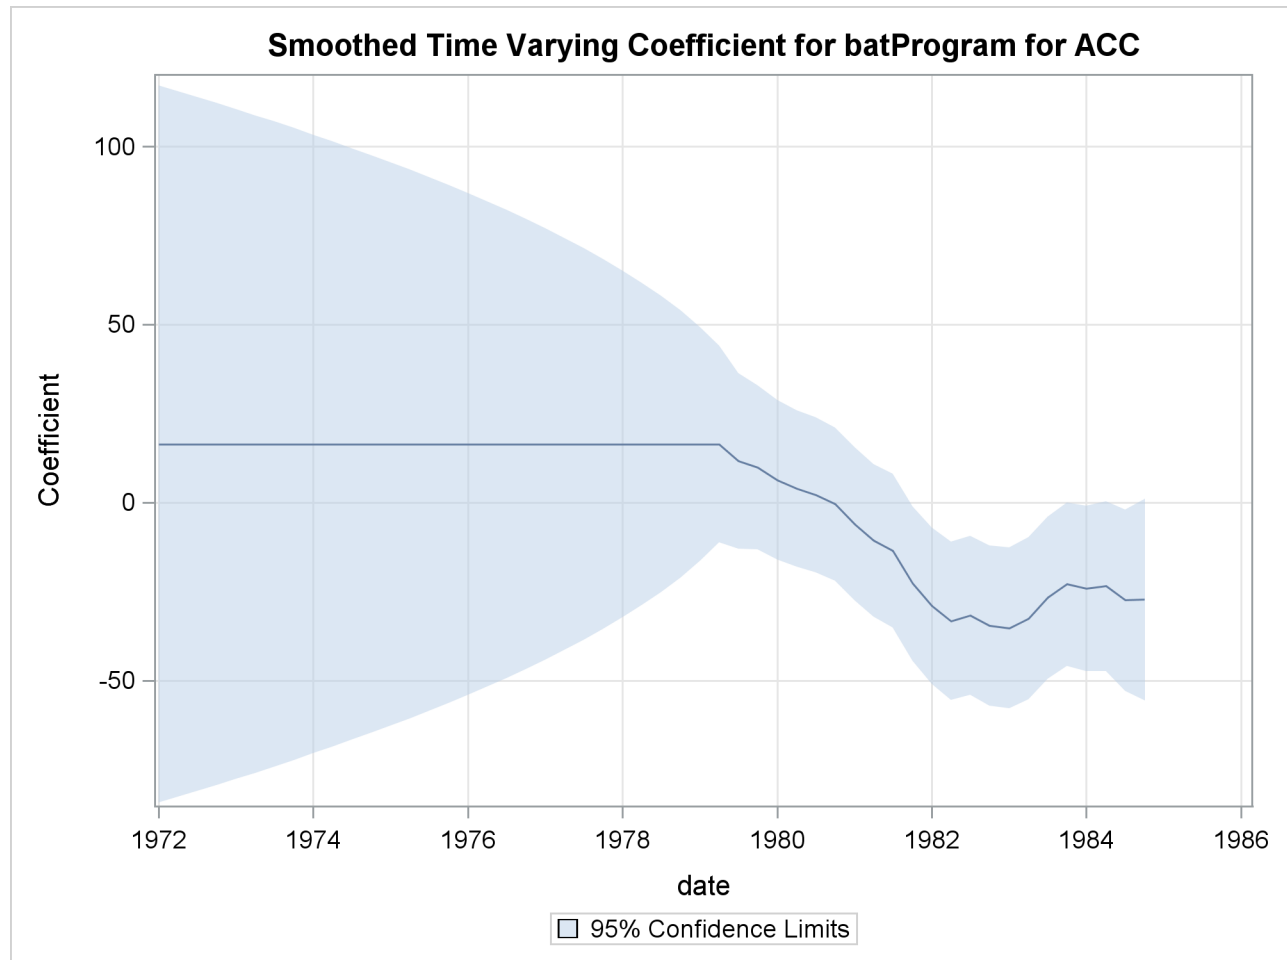
proc ucm data=bat;
  model acc = fuel;
  id date interval=qtr;
  irregular;
  level var=0 noest;
  randomreg batProgram / plot=smooth;
  season length=4 var=0 noest plot=smooth;
  estimate plot=(panel residual);
  forecast plot=forecasts lead=0;
run;

```

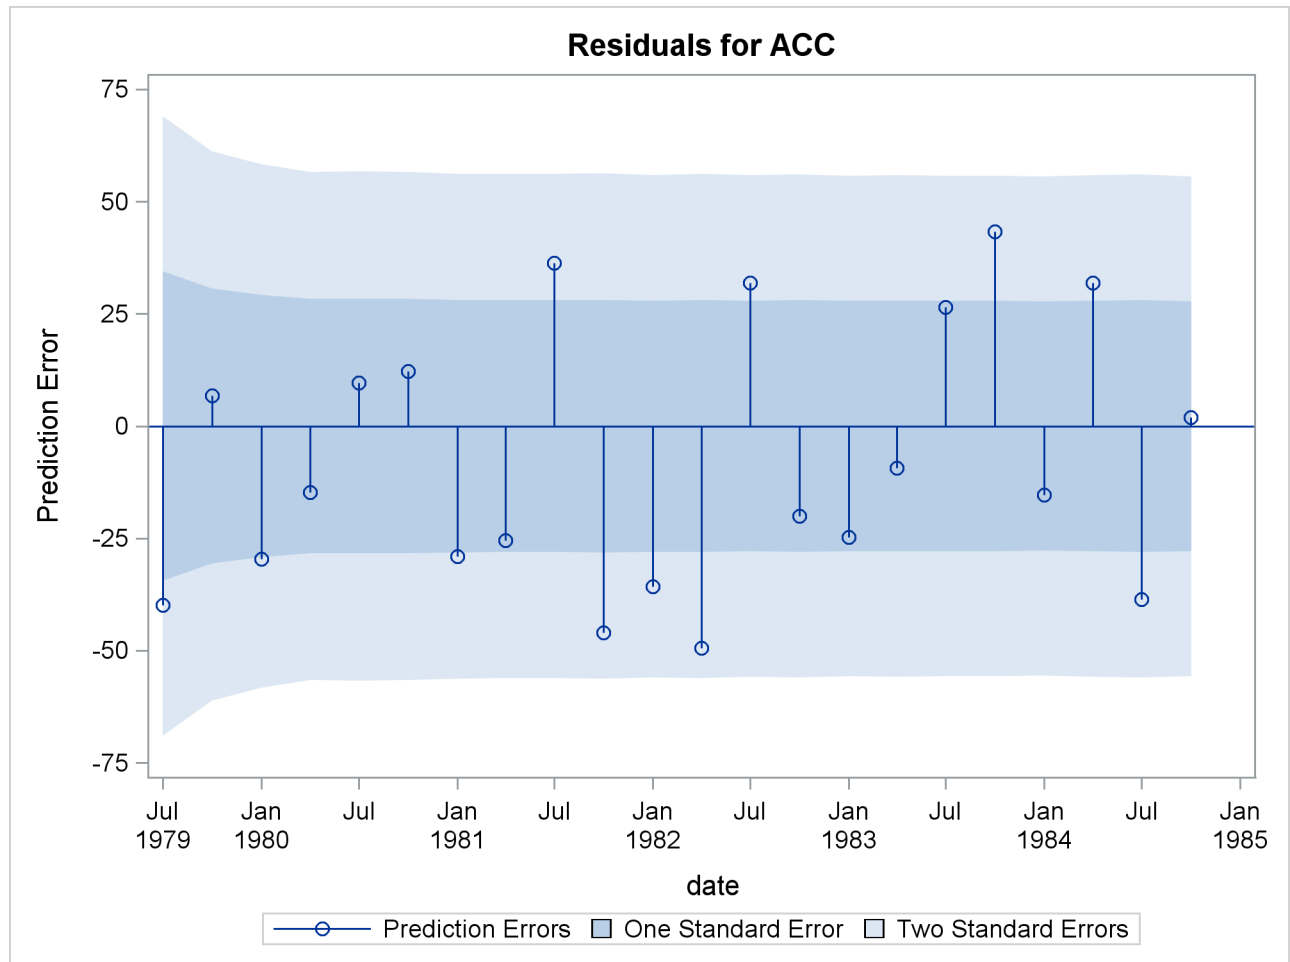
The model seems to fit the data adequately. No data are withheld for model validation because the series is relatively short. The plot of the time-varying coefficient of BATPROGRAM is shown in [Output 34.4.1](#). As expected, it shows that the effectiveness of the program increases as awareness of the program becomes dispersed. The effectiveness eventually seems to level off. The residual diagnostic plots are shown in

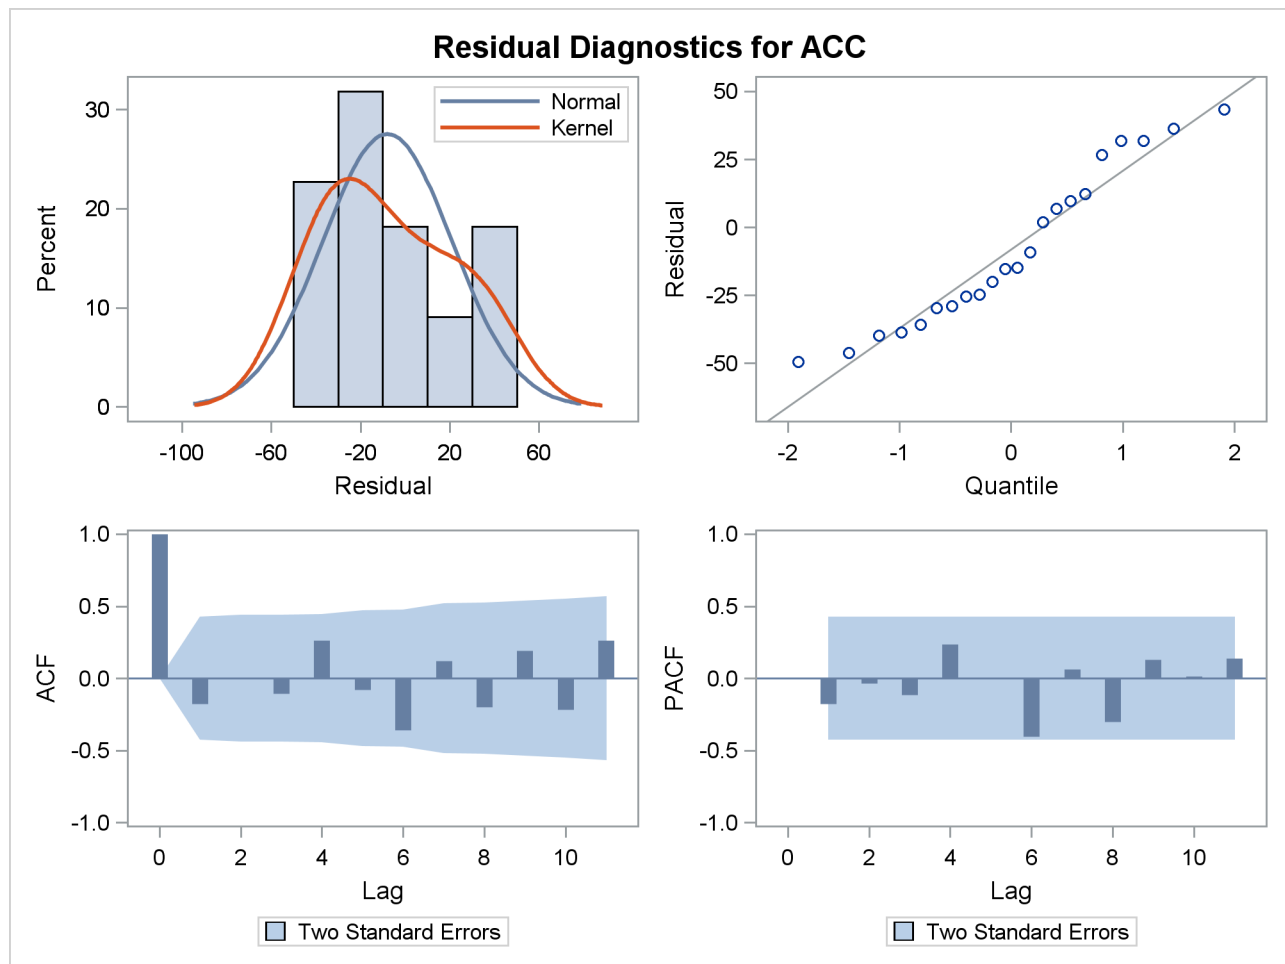
Output 34.4.2 and Output 34.4.3, the forecast plot is in Output 34.4.4, the goodness-of-fit statistics are in Output 34.4.5, and the parameter estimates are in Output 34.4.6.

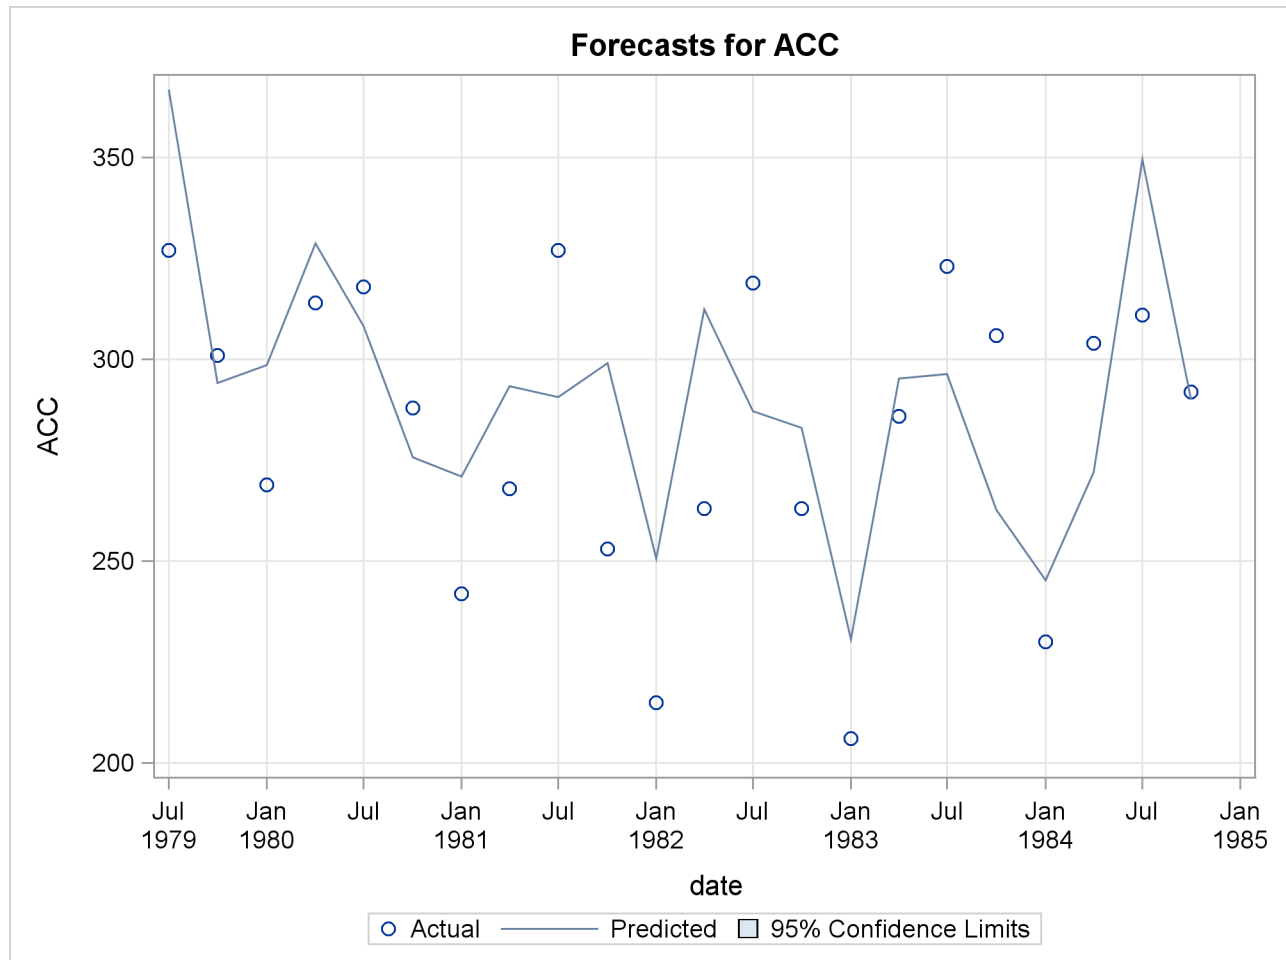
Output 34.4.1 Time-Varying Regression Coefficient of BATPROGRAM



Output 34.4.2 Residuals for the Time-Varying Regression Model



Output 34.4.3 Residual Diagnostics for the Time-Varying Regression Model

Output 34.4.4 One-Step-Ahead Forecasts for the Time-Varying Regression Model**Output 34.4.5** Model Fit for the Time-Varying Regression Model

Fit Statistics Based on Residuals	
Mean Squared Error	866.75562
Root Mean Squared Error	29.44071
Mean Absolute Percentage Error	9.50326
Maximum Percent Error	14.15368
R-Square	0.32646
Adjusted R-Square	0.29278
Random Walk R-Square	0.63010
Amemiya's Adjusted R-Square	0.19175
Number of non-missing residuals used for computing the fit statistics = 22	

Output 34.4.6 Parameter Estimates for the Time-Varying Regression Model

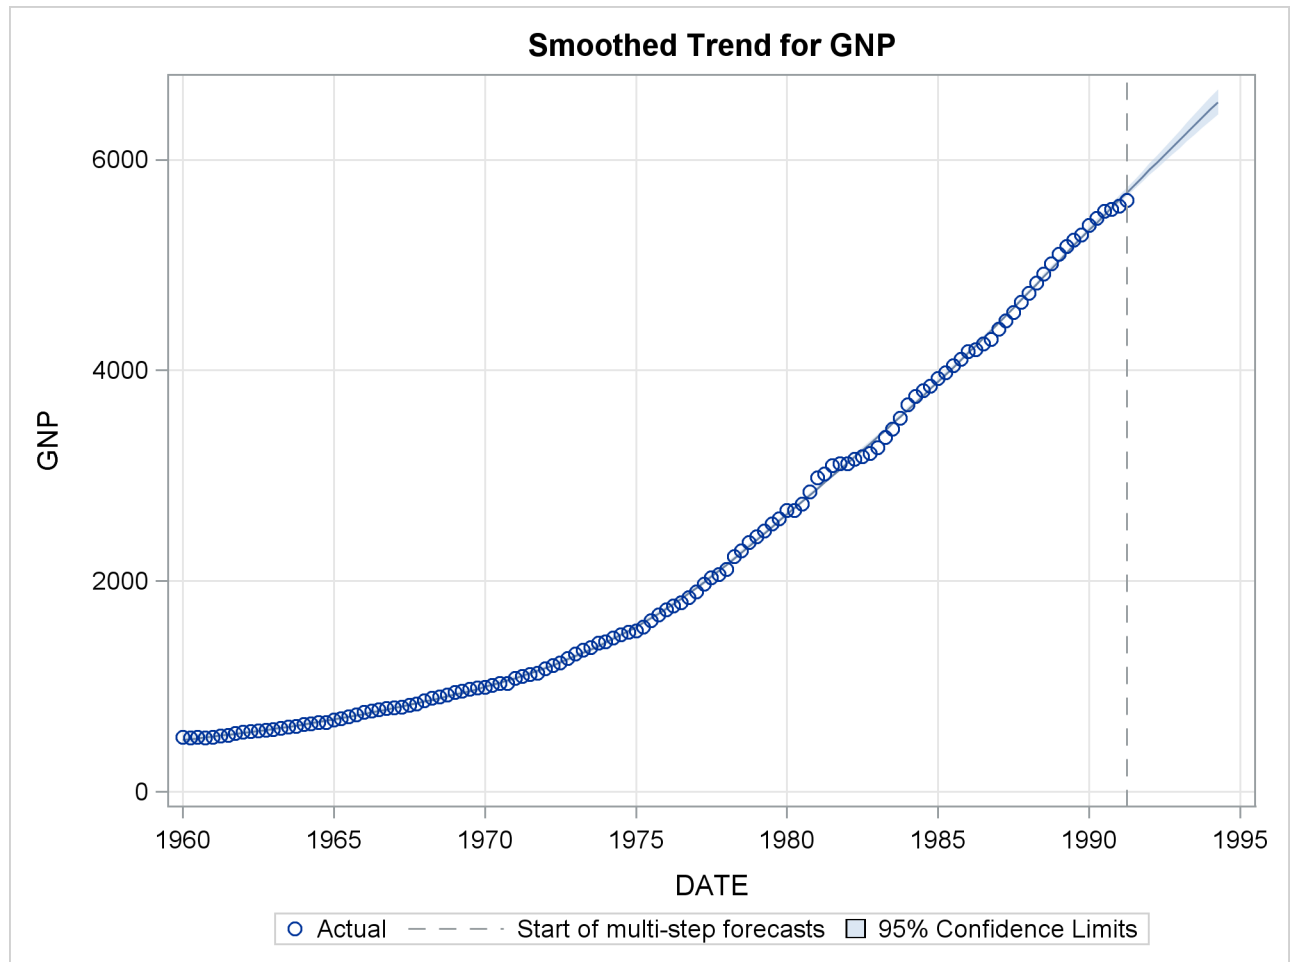
Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Irregular	Error Variance	480.92258	109.21980	4.40	<.0001
FUEL	Coefficient	6.23279	0.67533	9.23	<.0001
batProgram	Error Variance	84.22334	79.88166	1.05	0.2917

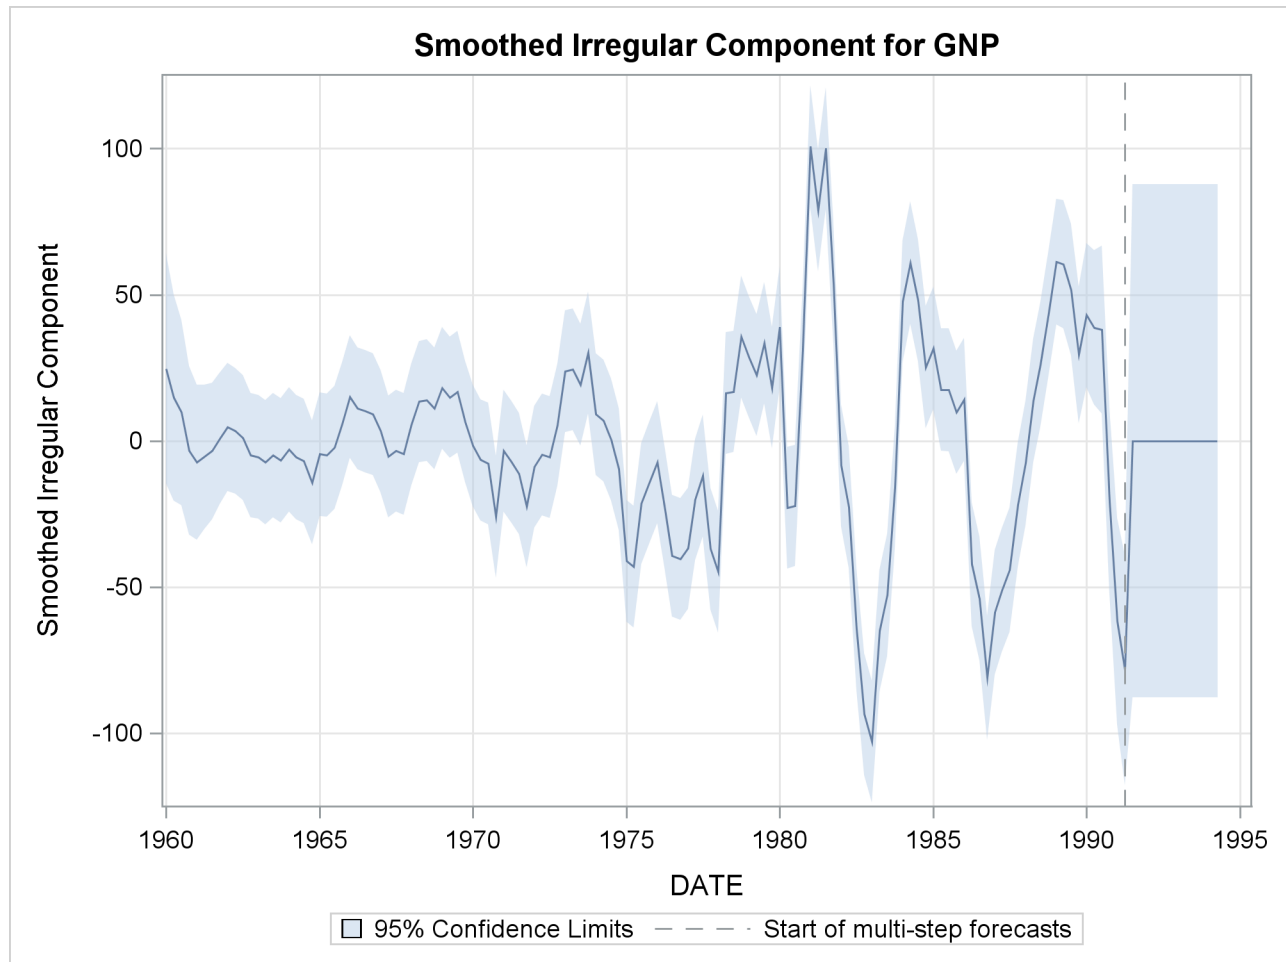
Example 34.5: Trend Removal Using the Hodrick-Prescott Filter

Hodrick-Prescott filter (see Hodrick and Prescott (1997)) is a popular tool in macroeconomics for fitting smooth trend to time series. It is well known that the trend computation according to this filter is equivalent to fitting the local linear trend plus irregular model with the level disturbance variance restricted to zero and the slope disturbance variance restricted to be a suitable multiple of the irregular component variance. The multiple used depends on the frequency of the series; for example, for quarterly series the commonly recommended multiple is $1/1600 = 0.000625$. For other intervals there is no consensus, but a frequently suggested value for monthly series is $1/14400$ and the value for an annual series can range from $1/400 = 0.0025$ to $1/7 = 0.15$. The data set considered in this example consists of quarterly GNP values for the United States from 1960 to 1991. In the UCM procedure statements that follow, the presence of the PROFILE option in the ESTIMATE statement implies that the restriction that the disturbance variance of the slope component be fixed at 0.000625 is interpreted differently: it implies that the disturbance variance of the slope component be restricted to be 0.000625 *times* the estimated irregular component variance, as needed for the Hodrick-Prescott filter. The plot of the fitted trend is shown in [Output 34.5.1](#), and the plot of the smoothed irregular component, which corresponds to the detrended series, is given in [Output 34.5.2](#). The detrended series can be further analyzed for business cycles.

```
proc ucm data=sashelp.gnp;
  id date interval=qtr;
  model gnp;
  irregular plot=smooth;
  level var=0 noest plot=smooth;
  slope var=0.000625 noest;
  estimate PROFILE;
  forecast plot=(decomp);
run;
```

Output 34.5.1 Smoothed Trend for the GNP Series as per the Hodrick-Prescott Filter



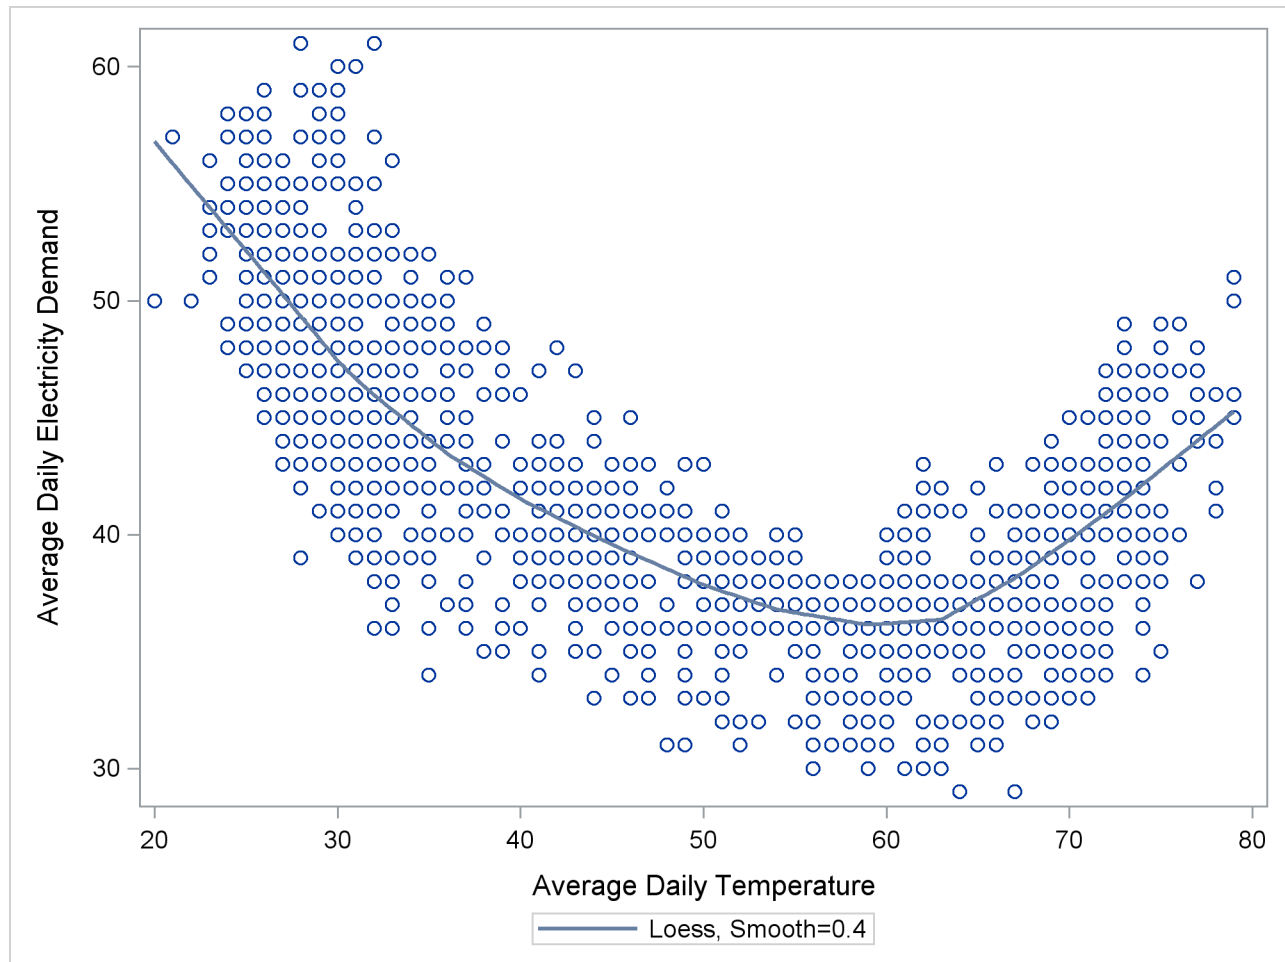
Output 34.5.2 Detrended GNP Series

Example 34.6: Using Splines to Incorporate Nonlinear Effects

The data in this example are created to mirror the electricity demand and temperature data recorded at a utility company in the midwest region of the United States. The data set (not shown), `utility`, has three variables: `load`, `temp`, and `date`. The `load` column contains the daily electricity demand, the `temp` column has the average daily temperature readings, and the `date` column records the observation date.

The following statements produce a plot, shown in [Output 34.6.1](#), of electricity load versus temperature. Clearly the relationship is smooth but nonlinear: the load generally increases when the temperatures are away from the comfortable sixties.

```
proc sgplot data=utility;
  loess x=temp y=load / smooth=0.4;
run;
```

Output 34.6.1 Load versus Temperature Plot

The time series plot of the load (not shown) also shows that, apart from a day-of-the-week seasonal effect, there are no additional easily identifiable patterns in the series. The series has no apparent upward or downward trend. The following statements fit a UCM to the series that takes into account these observations. The particular choice of the model is a result of a little modeling exercise that compared a small number of competing models. The chosen model is adequate but by no means the best possible. The temperature effect is modeled by a deterministic three-degree spline with knots at 30, 40, 50, 60, and 75. The knot locations and the degree were chosen by visual inspection of the plot ([Output 34.6.1](#)). An autoreg component is used in place of the simple irregular component, which improved the residual analysis. The last 60 days of data are withheld for out-of-sample forecast evaluation (note the BACK= option in both the ESTIMATE and FORECAST statements). The OUTLIER statement is used to increase the number of outliers reported to 10. Since no CHECKBREAK option is used in the LEVEL statement, only the additive outliers are searched. In this example the use of the EXTRADIFFUSE= option in the ESTIMATE and FORECAST statements is useful for discarding some early one-step-ahead forecasts and residuals with large variance.

```

proc ucm data=utility;
  id date interval=day;
  model load;
  autoreg;
  level plot=smooth;
  splinereg temp knots=30 40 50 65 75 degree=3
    variance=0 noest;
  season length=7 var=0 noest;
    estimate plot=panel back=60
      extradiffuse=50;
  outlier maxnum=10;
  forecast back=60 lead=60
    extradiffuse=50;
run;

```

The parameter estimates are given in [Output 34.6.2](#), and the residual goodness-of-fit statistics are shown in [Output 34.6.3](#). The residual diagnostic plots are shown in [Output 34.6.4](#). The ACF and PACF plots appear satisfactory, but the normality plots, particularly the Q-Q plot, show possible violations. It appears that, at least in part, this nonNormal behavior of the residuals might be attributable to the outliers in the series. The outlier summary table, [Output 34.6.5](#), shows the most likely outlying observations. Notice that most of these outliers are holidays, like July 4th, when the electricity load is lower than usual for that day of the week.

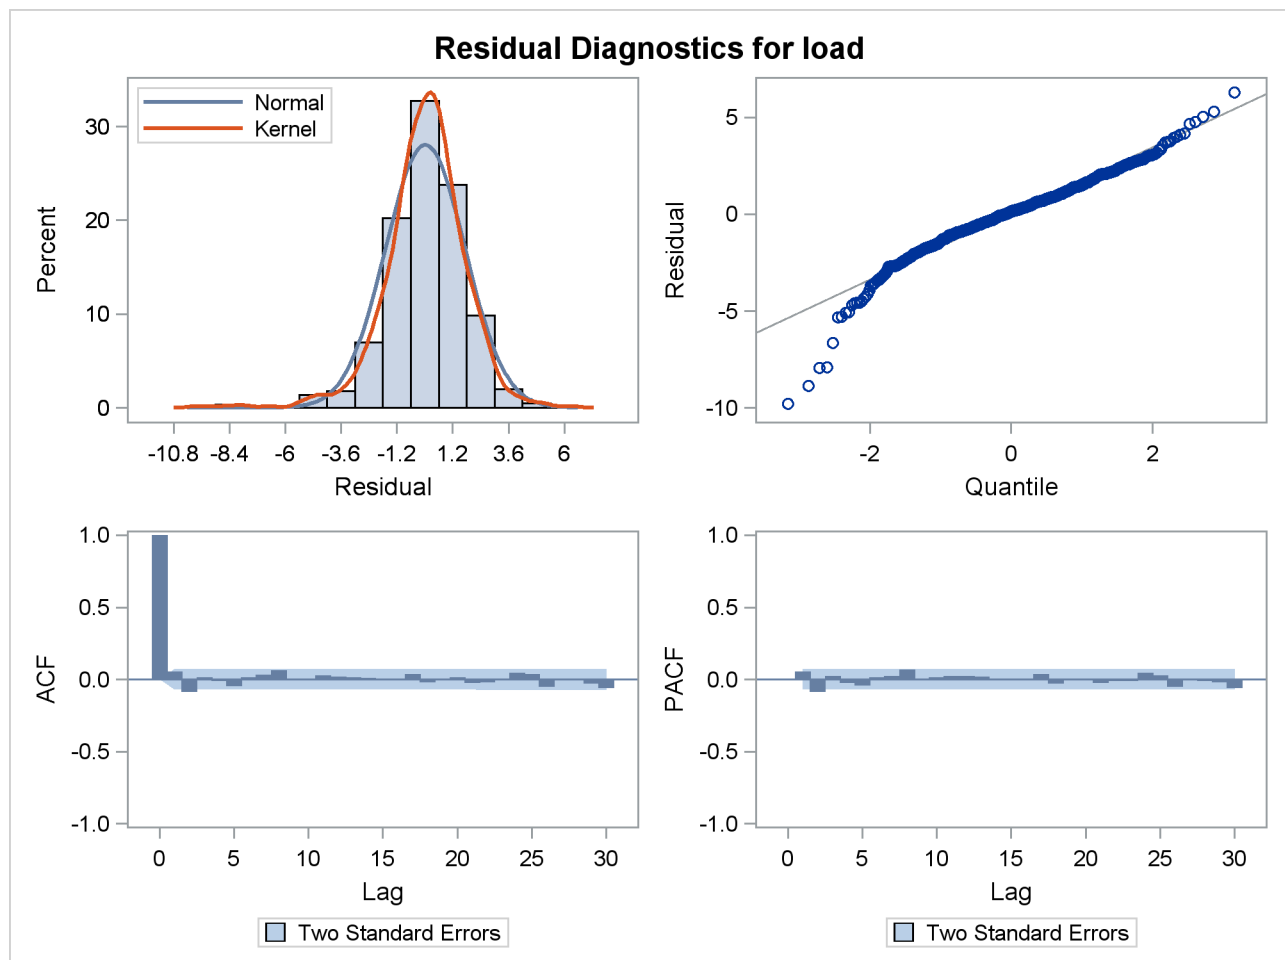
Output 34.6.2 Electricity Load: Parameter Estimates

The UCM Procedure					
Final Estimates of the Free Parameters					
Component	Parameter	Estimate	Approx Std Error	t Value	Approx Pr > t
Level	Error Variance	0.21185	0.05025	4.22	<.0001
AutoReg	Damping Factor	0.57522	0.03466	16.60	<.0001
AutoReg	Error Variance	2.21057	0.20478	10.79	<.0001
temp	Spline Coefficient_1	4.72502	1.93997	2.44	0.0149
temp	Spline Coefficient_2	2.19116	1.71243	1.28	0.2007
temp	Spline Coefficient_3	-7.14492	1.56805	-4.56	<.0001
temp	Spline Coefficient_4	-11.39950	1.45098	-7.86	<.0001
temp	Spline Coefficient_5	-16.38055	1.36977	-11.96	<.0001
temp	Spline Coefficient_6	-18.76075	1.28898	-14.55	<.0001
temp	Spline Coefficient_7	-8.04628	1.09017	-7.38	<.0001
temp	Spline Coefficient_8	-2.30525	1.25102	-1.84	0.0654

Output 34.6.3 Electricity Load: goodness-of-fit

Fit Statistics Based on Residuals	
Mean Squared Error	2.90945
Root Mean Squared Error	1.70571
Mean Absolute Percentage Error	2.92586
Maximum Percent Error	14.96281
R-Square	0.92739
Adjusted R-Square	0.92721
Random Walk R-Square	0.69618
Amemiya's Adjusted R-Square	0.92684
Number of non-missing residuals used for computing the fit statistics = 791	

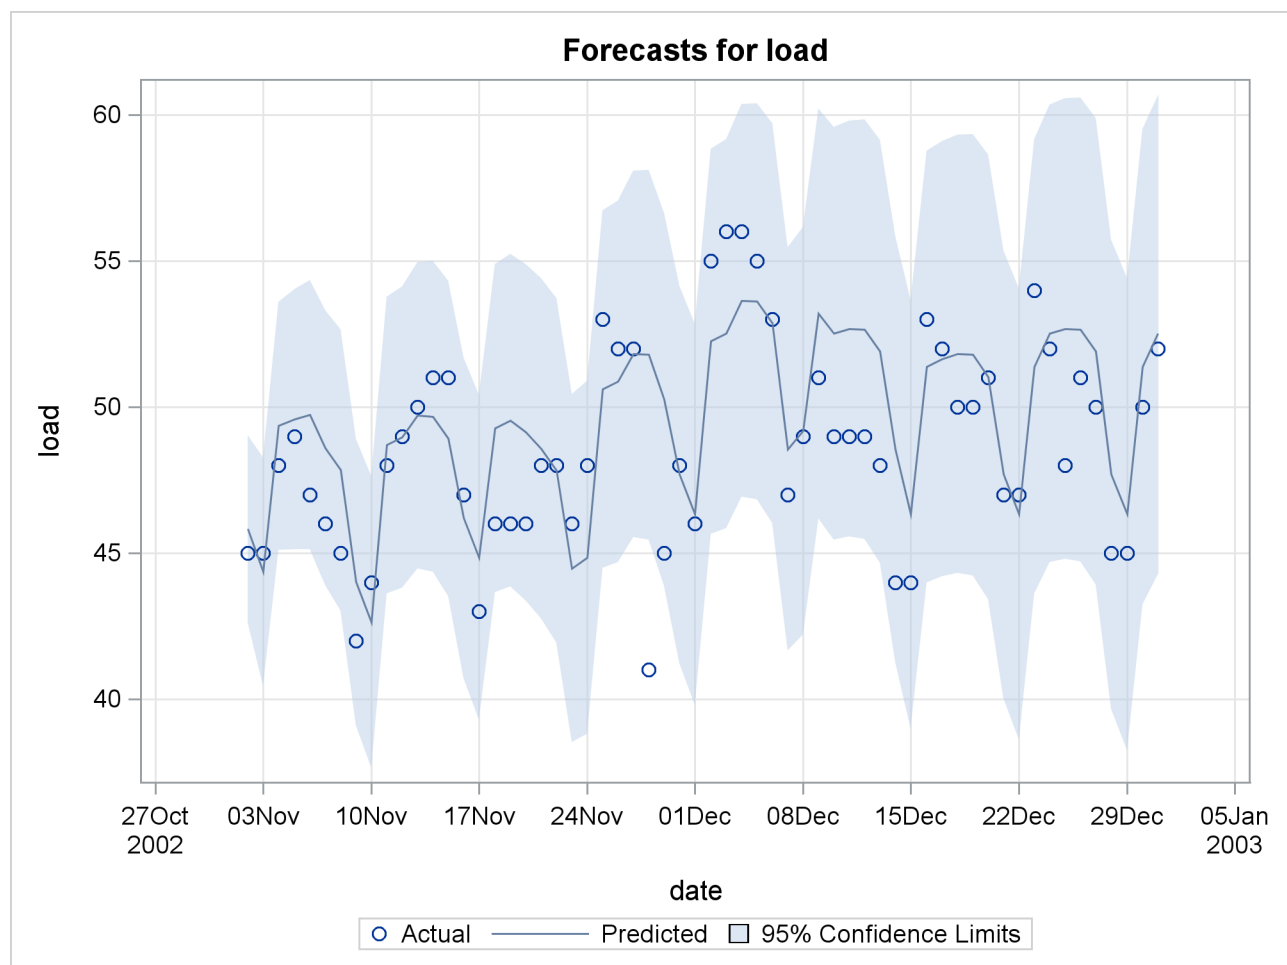
Output 34.6.4 Electricity Load: Residual Diagnostics



Output 34.6.5 Additive Outliers in the Electricity Load Series

Obs	Time	Estimate	StdErr	ChiSq	DF	Prob ChiSq
1281	04JUL2002	-7.99908	1.3417486	35.54	1	<.0001
916	04JUL2001	-6.55778	1.338431	24.01	1	<.0001
329	25NOV1999	-5.85047	1.3379735	19.12	1	<.0001
977	03SEP2001	-5.67254	1.3389138	17.95	1	<.0001
1341	02SEP2002	-5.49631	1.337843	16.88	1	<.0001
693	23NOV2000	-5.27968	1.3374368	15.58	1	<.0001
915	03JUL2001	5.06557	1.3375273	14.34	1	0.0002
1057	22NOV2001	-5.01550	1.3386184	14.04	1	0.0002
551	04JUL2000	-4.89965	1.3381557	13.41	1	0.0003
879	28MAY2001	-4.76135	1.3375349	12.67	1	0.0004

The plot of the load forecasts for the withheld data is shown in [Output 34.6.6](#).

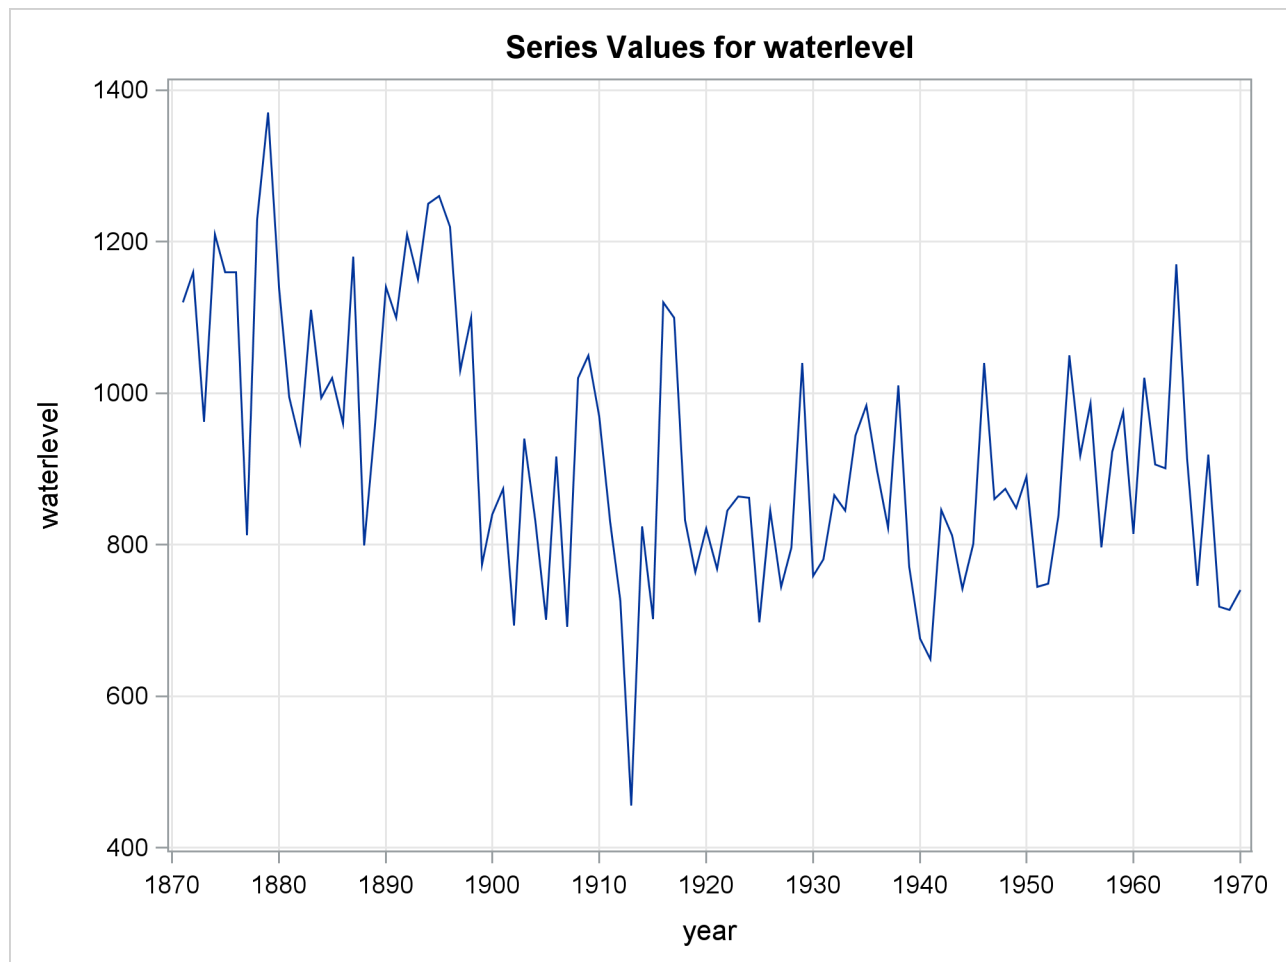
Output 34.6.6 Electricity Load: Forecast Evaluation of the Withheld Data

Example 34.7: Detection of Level Shift

The series in this example consists of the yearly water level readings of the Nile River recorded at Aswan, Egypt (see Cobb (1978) and de Jong and Penzer (1998)). The readings are from the years 1871 to 1970. The series does not show any apparent trend or any other distinctive patterns; however, there is a shift in the water level starting at the year 1899. This shift could be attributed to the start of construction of a dam near Aswan in that year. A time series plot of this series is given in [Output 34.7.1](#). The following DATA step statements create the input data set.

```
data nile;
  input waterlevel @@;
  year = intnx( 'year', '1jan1871'd, _n_-1 );
  format year year4.;
datalines;
  1120 1160 963 1210 1160 1160 813 1230 1370 1140
  995 935 1110 994 1020 960 1180 799 958 1140
  1100 1210 1150 1250 1260 1220 1030 1100 774 840
  874 694 940 833 701 916 692 1020 1050 969
  831 726 456 824 702 1120 1100 832 764 821
  768 845 864 862 698 845 744 796 1040 759
  781 865 845 944 984 897 822 1010 771 676
  649 846 812 742 801 1040 860 874 848 890
  744 749 838 1050 918 986 797 923 975 815
  1020 906 901 1170 912 746 919 718 714 740
;

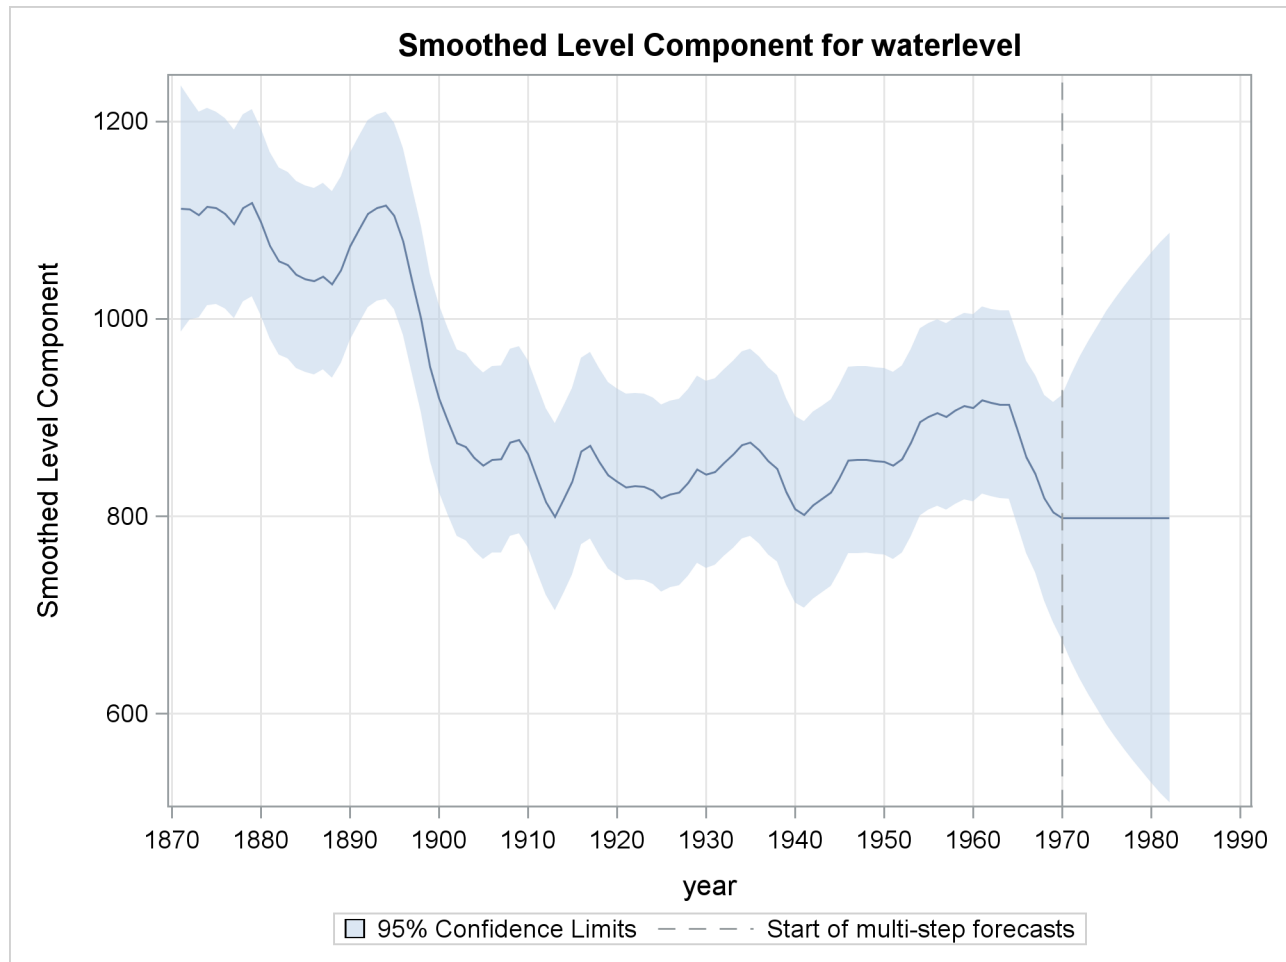
proc timeseries data=nile plot=series;
  id year interval=year;
  var waterlevel;
run;
```

Output 34.7.1 Nile Water Level

In this situation it is known that a shift in the water level occurred within the span of the series, and its effect can be easily taken into account by including an appropriate indicator variable as a regressor. However, in many situation such prior information is not available, and it is useful to detect such a shift in a data analytic fashion. You can check for breaks in the level by using the [CHECKBREAK](#) option in the `LEVEL` statement. The following statements fit a simple locally constant level plus error model to the series:

```
proc ucm data=nile;
  id year interval=year;
  model waterlevel;
  irregular;
  level plot=smooth checkbreak;
  estimate;
  forecast plot=decomp;
run;
```

The plot in [Output 34.7.2](#) shows a noticeable drop in the smoothed water level around 1899.

Output 34.7.2 Smoothed Trend without the Shift of 1899

The “Outlier Summary” table in [Output 34.7.3](#) shows the most likely types of breaks and their locations within the series span. The shift of 1899 is easily detected.

Output 34.7.3 Detection of Structural Breaks in the Nile River Level

Outlier Summary					
Obs	year	Break Type	Standard		DF
			Estimate	Error Chi-Square	
29	1899	Level	-315.73791	97.639753	10.46
					1
					0.0012

The following statements specify a UCM that models the level of the river as a locally constant series with a shift in the year 1899, represented by a dummy regressor (SHIFT1899):

```
data nile;
  set nile;
  shift1899 = ( year >= '1jan1899'd );
run;
```

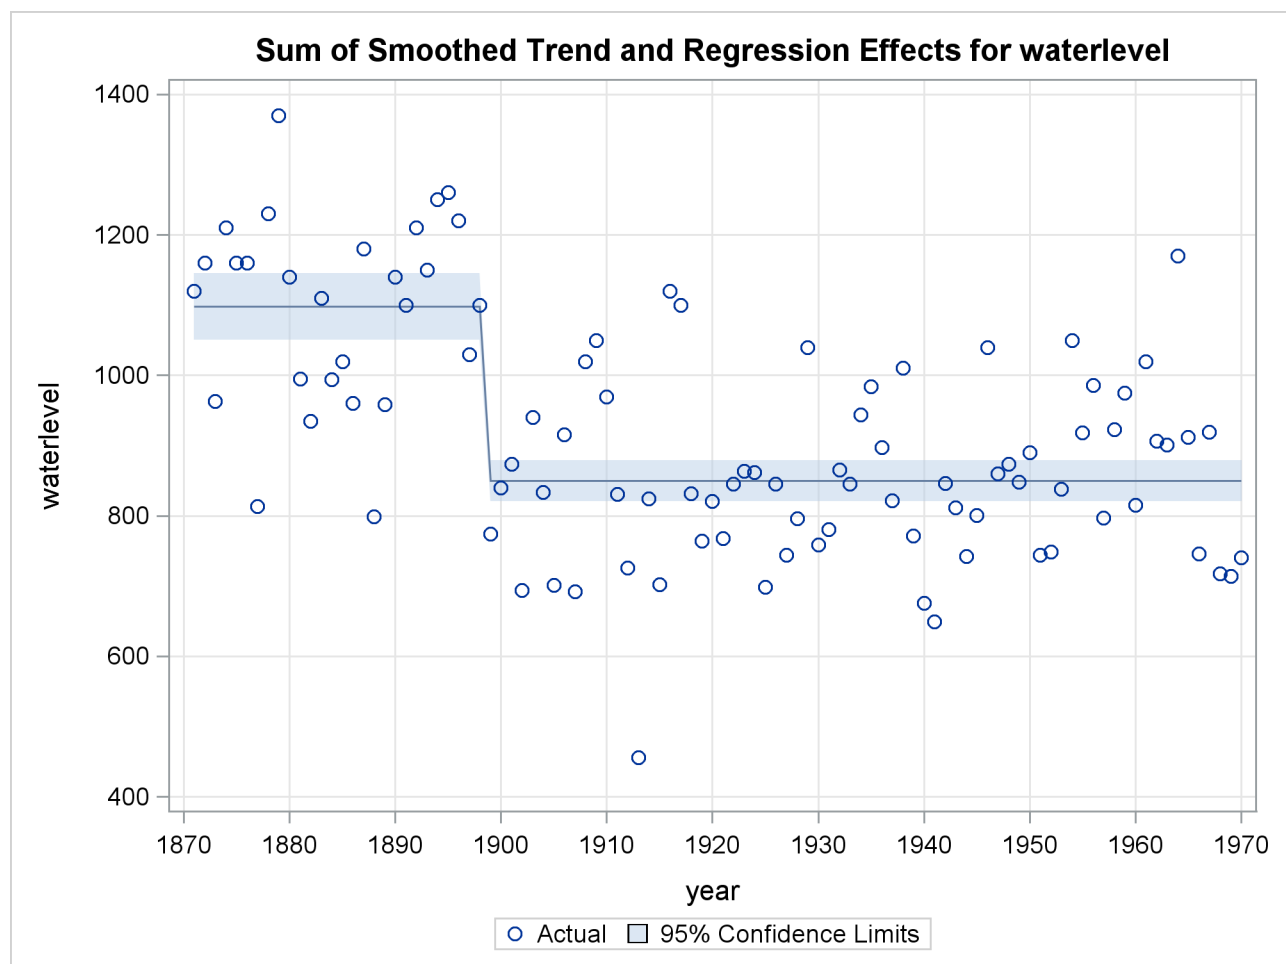
```

proc ucm data=nile;
  id year interval=year;
  model waterlevel = shift1899;
  irregular;
  level;
  estimate;
  forecast plot=decomp;
run;

```

The plot in [Output 34.7.4](#) shows the smoothed trend, including the correction due to the shift in the year 1899. Notice the simplicity in the shape of the smoothed curve after the incorporation of the shift information.

Output 34.7.4 Smoothed Trend plus Shift of 1899



Example 34.8: ARIMA Modeling

This example shows how you can use the UCM procedure for ARIMA modeling. The parameter estimates and predictions for ARIMA models obtained by using PROC UCM will be close to those obtained by using

PROC ARIMA (in the presence of the ML option in its ESTIMATE statement) if the model is stationary or if the model is nonstationary and there are no missing values in the data. See Chapter 7, “[The ARIMA Procedure](#),” for additional details about the ARIMA procedure. However, if there are missing values in the data and the model is nonstationary, then the UCM and ARIMA procedures can produce significantly different parameter estimates and predictions. An article by Kohn and Ansley (1986) suggests a statistically sound method of estimation, prediction, and interpolation for nonstationary ARIMA models with missing data. This method is based on an algorithm that is equivalent to the Kalman filtering and smoothing algorithm used in the UCM procedure. The results of an illustrative example in their article are reproduced here using the UCM procedure. In this example an $ARIMA(0,1,1) \times (0,1,1)_{12}$ model is applied to the logarithm of the air series in the `sashelp.air` data set. Four different missing value patterns are considered to highlight different aspects of the problem:

- *Data1*. The full data set of 144 observations.
- *Data2*. The set of 78 observations that omit January through November in each of the last 6 years.
- *Data3*. The data set with the 5 observations July 1949, June, July, and August 1957, and July 1960 missing.
- *Data4*. The data set with all July observations missing and June and August 1957 also missing.

The following DATA steps create these data sets:

```
data Data1;
    set sashelp.air;
    logair = log(air);
run;

data Data2;
    set data1;
    if year(date) >= 1955 and month(date) < 12 then logair = .;
run;

data Data3;
    set data1;
    if (year(date) = 1949 and month(date) = 7) then logair = .;
    if ( year(date) = 1957 and
        (month(date) = 6 or month(date) = 7 or month(date) = 8))
        then logair = .;
    if (year(date) = 1960 and month(date) = 7) then logair = .;
run;

data Data4;
    set data1;
    if month(date) = 7 then logair = .;
    if year(date) = 1957 and (month(date) = 6 or month(date) = 8)
        then logair = .;
run;
```

The following statements specify the $ARIMA(0, 1, 1) \times (0, 1, 1)_{12}$ model for the `logair` series in the first data set (`Data1`):

```

proc ucm data=Data1;
  id date interval=month;
  model logair;
  irregular q=1 sq=1 s=12;
  deplag lags=(1)(12) phi=1 1 noest;
  estimate outest=est1;
  forecast outfor=for1;
run;

```

Note that the moving average part of the model is specified by using the Q=, SQ=, and S= options in the IRREGULAR statement and the differencing operator, $(1 - B)(1 - B^{12})$, is specified by using the DEPLAG statement. The model does not contain an intercept term; therefore no LEVEL statement is needed. The parameter estimates are saved in a data set EST1 by using the OUTEST= option in the ESTIMATE statement and the forecasts and the component estimates are saved in a data set FOR1 by using the OUTFOR= option in the FORECAST statement. The same analysis is performed on the other three data sets, but is not shown here.

Output 34.8.1 resembles Table 1 in Kohn and Ansley (1986). This table is generated by merging the parameter estimates from the four analyses. Only the moving average parameter estimates and their standard errors are reported. The columns EST1 and STD1 correspond to the estimates for Data1. The parameter estimates and their standard errors for other three data sets are similarly named. Note that the parameter estimates closely match the parameter estimates in the article. However, their standard errors differ slightly. This difference could be the result of different ways of computing the Hessian at the optimum. The white noise error variance estimates are not reported here, but they agree quite closely with those in the article.

Output 34.8.1 Data Sets 1–4: Parameter Estimates and Standard Errors

P								
A								
R								
A								
M								
E	e	s	e	s	e	s	e	s
T	s	t	s	t	s	t	s	t
E	t	d	t	d	t	d	t	d
R	1	1	2	2	3	3	4	4
MA_1	0.402	0.090	0.457	0.121	0.408	0.092	0.431	0.091
SMA_1	0.557	0.073	0.758	0.236	0.566	0.075	0.573	0.074

Output 34.8.2 resembles Table 2 in Kohn and Ansley (1986). It contains forecasts and their standard errors for the four data sets. The numbers are very close to those in the article.

Output 34.8.2 Data Sets 1–4: Forecasts and Standard Errors

DATE	for1	std1	for2	std2	for3	std3	for4	std4
JAN61	6.110	0.037	6.084	0.052	6.110	0.037	6.111	0.037
FEB61	6.054	0.043	6.091	0.058	6.054	0.043	6.055	0.043
MAR61	6.172	0.048	6.247	0.063	6.173	0.048	6.174	0.048
APR61	6.199	0.053	6.205	0.068	6.199	0.053	6.200	0.052
MAY61	6.233	0.057	6.199	0.072	6.232	0.058	6.233	0.056
JUN61	6.369	0.061	6.308	0.076	6.367	0.062	6.368	0.060
JUL61	6.507	0.065	6.409	0.079	6.497	0.067	.	.
AUG61	6.503	0.069	6.414	0.082	6.503	0.069	6.503	0.067
SEP61	6.325	0.072	6.299	0.085	6.325	0.072	6.326	0.071
OCT61	6.209	0.075	6.174	0.087	6.209	0.076	6.209	0.074
NOV61	6.063	0.079	6.043	0.089	6.064	0.079	6.064	0.077
DEC61	6.168	0.082	6.174	0.086	6.168	0.082	6.169	0.080

Output 34.8.3 is based on Data2. It resembles Table 3 in Kohn and Ansley (1986). The columns S_SERIES and VS_SERIES in the **OUTFOR=** data set contain the interpolated values of logair and their variances. The estimate column in **Output 34.8.3** reports interpolated values (which are the same as S_SERIES), and the std column reports their standard errors (which are computed as square root of VS_SERIES) for January–November 1957. The actual logair values for these months, which are missing in Data2, are also provided for comparison. The numbers are very close to those in the article.

Output 34.8.3 Data Set 2: Interpolated Values and Standard Errors

DATE	logair	estimate	std
JAN57	5.753	5.733	0.045
FEB57	5.707	5.738	0.049
MAR57	5.875	5.893	0.052
APR57	5.852	5.850	0.054
MAY57	5.872	5.843	0.055
JUN57	6.045	5.951	0.055
JUL57	6.142	6.051	0.055
AUG57	6.146	6.055	0.054
SEP57	6.001	5.938	0.052
OCT57	5.849	5.812	0.049
NOV57	5.720	5.680	0.045

Output 34.8.4 resembles Table 4 in Kohn and Ansley (1986). These numbers are based on Data3, and they also are very close to those in the article.

Output 34.8.4 Data Set 3: Interpolated Values and Standard Errors

DATE	logair	estimate	std
JUL49	4.997	5.013	0.031
JUN57	6.045	6.024	0.030
JUL57	6.142	6.147	0.031
AUG57	6.146	6.148	0.030
JUL60	6.433	6.409	0.031

Output 34.8.5 resembles Table 5 in Kohn and Ansley (1986). As before, the numbers are very close to those in the article.

Output 34.8.5 Data Set 4: Interpolated Values and Standard Errors

DATE	logair	estimate	std
JUN57	6.045	6.023	0.030
AUG57	6.146	6.147	0.030

The similarity between the outputs in this example and the results shown in Kohn and Ansley (1986) demonstrate that PROC UCM can be effectively used for nonstationary ARIMA models with missing data.

References

- Akaike, H. (1974), "A New Look at the Statistical Model Identification," *IEEE Transaction on Automatic Control*, AC-19, 716–723.
- Anderson, T. W. (1971), *The Statistical Analysis of Time Series*, New York: John Wiley & Sons.
- Bloomfield, P. (2000), *Fourier Analysis of Time Series*, Second Edition, New York: John Wiley & Sons.
- Box, G. E. P. and Jenkins, G. M. (1976), *Time Series Analysis: Forecasting and Control*, San Francisco: Holden-Day.
- Bozdogan, H. (1987), "Model Selection and Akaike's Information Criterion (AIC): The General Theory and Its Analytical Extensions," *Psychometrika*, 52, 345–370.
- Brockwell, P.J., and Davis, R.A. (1991), *Time Series: Theory and Methods*, Second Edition, New York: Springer-Verlag.
- Burnham, K. P. and Anderson, D. R. (1998), *Model Selection and Inference: A Practical Information-Theoretic Approach*, New York: Springer-Verlag.
- Cobb, G. W. (1978), "The Problem of the Nile: Conditional Solution to a Change Point Problem," *Biometrika*, 65, 243–251.
- de Jong, P. and Chu-Chun-Lin, S. (2003), "Smoothing with an Unknown Initial Condition," *Journal of Time Series Analysis*, vol. 24, no. 2, 141–148.
- de Jong, P. and Penzer, J. (1998), "Diagnosing Shocks in Time Series," *Journal of the American Statistical Association*, vol. 93, no. 442, 796–806.
- Durbin, J. and Koopman, S. J. (2001), *Time Series Analysis by State Space Methods*, Oxford: Oxford University Press.

- Hannan, E.J. and Quinn, B.G. (1979), "The Determination of the Order of an Autoregression," *Journal of the Royal Statistical Society, Series B*, 41, 190–195.
- Harvey, A. C. (1989), *Forecasting, Structural Time Series Models and the Kalman Filter*, Cambridge: Cambridge University Press.
- Harvey, A. C. (2001), "Testing in Unobserved Components Models," *Journal of Forecasting*, 20, 1–19.
- Hodrick, R. and Prescott, E. (1997) "Postwar U.S. Business Cycles: An Empirical Investigation," *Journal of Money, Credit, and Banking*, 29, 1–16.
- Hurvich, C. M. and Tsai, C.-L. (1989), "Regression and Time Series Model Selection in Small Samples," *Biometrika*, 76, 297–307.
- Jones, Richard H. (1980), "Maximum Likelihood Fitting of ARMA Models to Time Series with Missing Observations," *Technometrics*, 22, 389–396.
- Kohn, R. and Ansley C. F. (1986), "Estimation, Prediction, and Interpolation for ARIMA models With Missing Data," *Journal of the American Statistical Association*, vol. 81, no. 395, 751–761.
- Schwarz, G. (1978), "Estimating the Dimension of a Model," *Annals of Statistics*, 6, 461–464.
- West, M. and Harrison, J. (1999) *Bayesian Forecasting and Dynamic Models*, Second Edition, New York: Springer-Verlag.

Chapter 35

The VARMAX Procedure

Contents

Overview: VARMAX Procedure	2220
Getting Started: VARMAX Procedure	2222
Vector Autoregressive Process	2222
Bayesian Vector Autoregressive Process	2230
Vector Error Correction Model	2231
Bayesian Vector Error Correction Model	2237
Vector Autoregressive Process with Exogenous Variables	2238
Parameter Estimation and Testing on Restrictions	2242
Causality Testing	2245
Syntax: VARMAX Procedure	2246
Functional Summary	2246
PROC VARMAX Statement	2249
BY Statement	2252
CAUSAL Statement	2253
COINTEG Statement	2253
ID Statement	2255
MODEL Statement	2256
GARCH Statement	2271
NLOPTIONS Statement	2272
OUTPUT Statement	2273
RESTRICT Statement	2274
TEST Statement	2275
Details: VARMAX Procedure	2276
Missing Values	2276
VARMAX Model	2276
Dynamic Simultaneous Equations Modeling	2280
Impulse Response Function	2283
Forecasting	2294
Tentative Order Selection	2299
VAR and VARX Modeling	2305
Bayesian VAR and VARX Modeling	2311
VARMA and VARMAX Modeling	2313
Model Diagnostic Checks	2320
Cointegration	2322

Vector Error Correction Modeling	2325
I(2) Model	2341
Multivariate GARCH Modeling	2344
Output Data Sets	2350
OUT= Data Set	2350
OUTEST= Data Set	2352
OUTHT= Data Set	2354
OUTSTAT= Data Set	2355
Printed Output	2357
ODS Table Names	2358
ODS Graphics	2363
Computational Issues	2364
Examples: VARMAX Procedure	2365
Example 35.1: Analysis of U.S. Economic Variables	2365
Example 35.2: Analysis of German Economic Variables	2377
Example 35.3: Numerous Examples	2390
Example 35.4: Illustration of ODS Graphics	2394
References	2397

Overview: VARMAX Procedure

Given a multivariate time series, the VARMAX procedure estimates the model parameters and generates forecasts associated with vector autoregressive moving-average processes with exogenous regressors (VARMAX) models. Often, economic or financial variables are not only contemporaneously correlated to each other, they are also correlated to each other's past values. The VARMAX procedure can be used to model these types of time relationships. In many economic and financial applications, the variables of interest (dependent, response, or endogenous variables) are influenced by variables external to the system under consideration (independent, input, predictor, regressor, or exogenous variables). The VARMAX procedure enables you to model the dynamic relationship both between the dependent variables and also between the dependent and independent variables.

VARMAX models are defined in terms of the orders of the autoregressive or moving-average process (or both). When you use the VARMAX procedure, these orders can be specified by options or they can be automatically determined. Criteria for automatically determining these orders include the following:

- Akaike information criterion (AIC)
- corrected AIC (AICC)
- Hannan-Quinn (HQ) criterion
- final prediction error (FPE)
- Schwarz Bayesian criterion (SBC), also known as Bayesian information criterion (BIC)

If you do not want to use the automatic order selection, the VARMAX procedure provides autoregressive order identification aids:

- partial cross-correlations
- Yule-Walker estimates
- partial autoregressive coefficients
- partial canonical correlations

For situations where the stationarity of the time series is in question, the VARMAX procedure provides tests to aid in determining the presence of unit roots and cointegration. These tests include the following:

- Dickey-Fuller tests
- Johansen cointegration test for nonstationary vector processes of integrated order one
- Stock-Watson common trends test for the possibility of cointegration among nonstationary vector processes of integrated order one
- Johansen cointegration test for nonstationary vector processes of integrated order two

For stationary vector times series (or nonstationary series made stationary by appropriate differencing), the VARMAX procedure provides for vector autoregressive and moving-average (VARMA) and Bayesian vector autoregressive (BVAR) models. To cope with the problem of high dimensionality in the parameters of the VAR model, the VARMAX procedure provides both vector error correction model (VECM) and Bayesian vector error correction model (BVECM). Bayesian models are used when prior information about the model parameters is available. The VARMAX procedure also allows independent (exogenous) variables with their distributed lags to influence dependent (endogenous) variables in various models such as VARMAX, BVARX, VECMX, and BVECMX models.

Forecasting is one of the main objectives of multivariate time series analysis. After successfully fitting the VARMAX, BVARX, VECMX, and BVECMX models, the VARMAX procedure computes predicted values based on the parameter estimates and the past values of the vector time series.

The model parameter estimation methods are the following:

- least squares (LS)
- maximum likelihood (ML)

The VARMAX procedure provides various hypothesis tests of long-run effects and adjustment coefficients by using the likelihood ratio test based on Johansen cointegration analysis. The VARMAX procedure offers the likelihood ratio test of the weak exogeneity for each variable.

After fitting the model parameters, the VARMAX procedure provides for model checks and residual analysis by using the following tests:

- Durbin-Watson (DW) statistics

- F test for autoregressive conditional heteroscedastic (ARCH) disturbance
- F test for AR disturbance
- Jarque-Bera normality test
- Portmanteau test

The VARMAX procedure supports several modeling features, including the following:

- seasonal deterministic terms
- subset models
- multiple regression with distributed lags
- dead-start model that does not have present values of the exogenous variables
- GARCH-type multivariate conditional heteroscedasticity models

The VARMAX procedure provides a Granger causality test to determine the Granger-causal relationships between two distinct groups of variables. It also provides the following:

- infinite order AR representation
- impulse response function (or infinite order MA representation)
- decomposition of the predicted error covariances
- roots of the characteristic functions for both the AR and MA parts to evaluate the proximity of the roots to the unit circle
- contemporaneous relationships among the components of the vector time series

Getting Started: VARMAX Procedure

This section outlines the use of the VARMAX procedure and gives five different examples of the kinds of models supported.

Vector Autoregressive Process

Let $\mathbf{y}_t = (y_{1t}, \dots, y_{kt})'$, $t = 1, 2, \dots$, denote a k -dimensional time series vector of random variables of interest. The p th-order VAR process is written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \Phi_1 \mathbf{y}_{t-1} + \dots + \Phi_p \mathbf{y}_{t-p} + \boldsymbol{\epsilon}_t$$

where the ϵ_t is a vector white noise process with $\epsilon_t = (\epsilon_{1t}, \dots, \epsilon_{kt})'$ such that $E(\epsilon_t) = 0$, $E(\epsilon_t \epsilon_t') = \Sigma$, and $E(\epsilon_t \epsilon_s') = 0$ for $t \neq s$; $\delta = (\delta_1, \dots, \delta_k)'$ is a constant vector and Φ_i is a $k \times k$ matrix.

Analyzing and modeling the series jointly enables you to understand the dynamic relationships over time among the series and to improve the accuracy of forecasts for individual series by using the additional information available from the related series and their forecasts.

Example of Vector Autoregressive Model

Consider the first-order stationary bivariate vector autoregressive model

$$y_t = \begin{pmatrix} 1.2 & -0.5 \\ 0.6 & 0.3 \end{pmatrix} y_{t-1} + \epsilon_t, \quad \text{with } \Sigma = \begin{pmatrix} 1.0 & 0.5 \\ 0.5 & 1.25 \end{pmatrix}$$

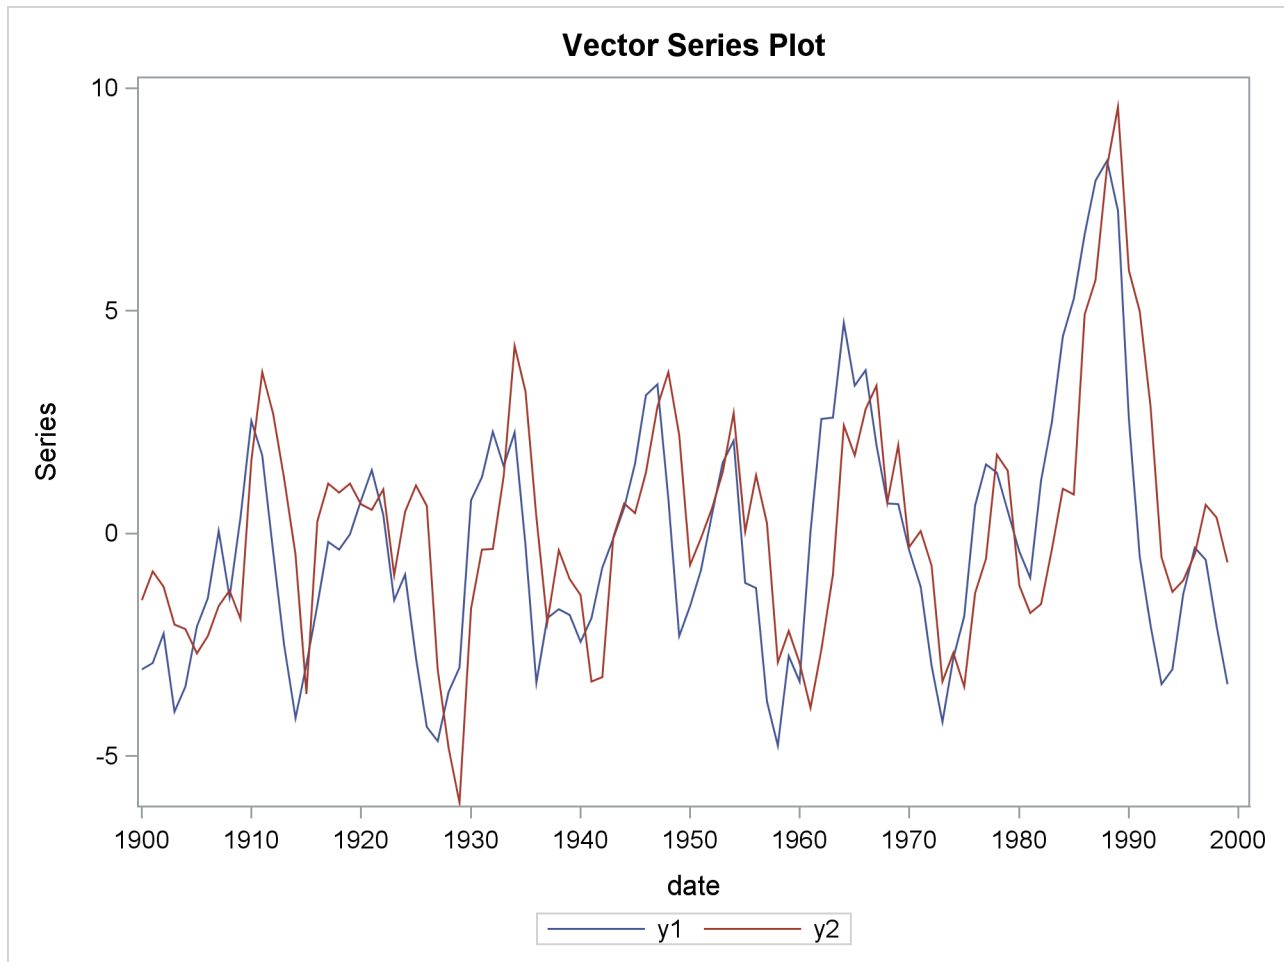
The following IML procedure statements simulate a bivariate vector time series from this model to provide test data for the VARMAX procedure:

```
proc iml;
  sig = {1.0 0.5, 0.5 1.25};
  phi = {1.2 -0.5, 0.6 0.3};
  /* simulate the vector time series */
  call varmasim(y,phi) sigma = sig n = 100 seed = 34657;
  cn = {'y1' 'y2'};
  create simull from y[colname=cn];
  append from y;
quit;
```

The following statements plot the simulated vector time series y_t shown in [Figure 35.1](#):

```
data simull;
  set simull;
  date = intnx( 'year', '01jan1900'd, _n_-1 );
  format date year4.;
run;

ods graphics on;
proc timeseries data=simull vectorplot=series;
  id date interval=year;
  var y1 y2;
run;
```

Figure 35.1 Plot of Generated Data Process

The following statements fit a VAR(1) model to the simulated data. First, you specify the input data set in the PROC VARMAX statement. Then, you use the MODEL statement to designate the dependent variables, y_1 and y_2 . To estimate a VAR model with mean zero, you specify the order of the autoregressive model with the P= option and the NOINT option. The MODEL statement fits the model to the data and prints parameter estimates and their significance. The PRINT=ESTIMATES option prints the matrix form of parameter estimates, and the PRINT=DIAGNOSE option prints various diagnostic tests. The LAGMAX=3 option is used to print the output for the residual diagnostic checks.

To output the forecasts to a data set, you specify the OUTPUT statement with the OUT= option. If you want to forecast five steps ahead, you use the LEAD=5 option. The ID statement specifies the yearly interval between observations and provides the Time column in the forecast output.

The VARMAX procedure output is shown in [Figure 35.2](#) through [Figure 35.10](#).

```
/*--- Vector Autoregressive Model ---*/

proc varmax data=simul1;
  id date interval=year;
  model y1 y2 / p=1 noint lagmax=3
               print=(estimates diagnose);
  output out=for lead=5;
run;
```

Figure 35.2 Descriptive Statistics

The VARMAX Procedure						
		Number of Observations		100		
		Number of Pairwise Missing		0		
Simple Summary Statistics						
Variable Type		N	Mean	Standard Deviation	Min	Max
y1	Dependent	100	-0.21653	2.78210	-4.75826	8.37032
y2	Dependent	100	0.16905	2.58184	-6.04718	9.58487

The VARMAX procedure first displays descriptive statistics. The Type column specifies that the variables are dependent variables. The column N stands for the number of nonmissing observations.

Figure 35.3 shows the type and the estimation method of the fitted model for the simulated data. It also shows the AR coefficient matrix in terms of lag 1, the parameter estimates, and their significance, which can indicate how well the model fits the data.

The second table schematically represents the parameter estimates and allows for easy verification of their significance in matrix form.

In the last table, the first column gives the left-hand-side variable of the equation; the second column is the parameter name ARl_i_j , which indicates the (i, j) th element of the lag l autoregressive coefficient; the last column is the regressor that corresponds to the displayed parameter.

Figure 35.3 Model Type and Parameter Estimates

The VARMAX Procedure						
Type of Model			VAR(1)			
Estimation Method			Least Squares Estimation			
AR						
Lag	Variable	y1	y2			
1	y1	1.15977	-0.51058			
	y2	0.54634	0.38499			
Schematic Representation						
Variable/ Lag		AR1				
y1		+-				
y2		++				
+ is > 2*std error, - is < -2*std error, . is between, * is N/A						
Model Parameter Estimates						
Equation Parameter		Estimate	Standard Error	t Value	Pr > t	Variable
y1	AR1_1_1	1.15977	0.05508	21.06	0.0001	y1(t-1)
	AR1_1_2	-0.51058	0.05898	-8.66	0.0001	y2(t-1)
y2	AR1_2_1	0.54634	0.05779	9.45	0.0001	y1(t-1)
	AR1_2_2	0.38499	0.06188	6.22	0.0001	y2(t-1)

The fitted VAR(1) model with estimated standard errors in parentheses is given as

$$\mathbf{y}_t = \begin{pmatrix} 1.160 & -0.511 \\ (0.055) & (0.059) \\ 0.546 & 0.385 \\ (0.058) & (0.062) \end{pmatrix} \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

Clearly, all parameter estimates in the coefficient matrix Φ_1 are significant.

The model can also be written as two univariate regression equations.

$$\begin{aligned}y_{1t} &= 1.160 y_{1,t-1} - 0.511 y_{2,t-1} + \epsilon_{1t} \\y_{2t} &= 0.546 y_{1,t-1} + 0.385 y_{2,t-1} + \epsilon_{2t}\end{aligned}$$

The table in [Figure 35.4](#) shows the innovation covariance matrix estimates and the various information criteria results. The smaller value of information criteria fits the data better when it is compared to other models. The variable names in the covariance matrix are printed for convenience; y1 means the innovation for y1, and y2 means the innovation for y2.

Figure 35.4 Innovation Covariance Estimates and Information Criteria

Covariances of Innovations			
Variable		y1	y2
y1		1.28875	0.39751
y2		0.39751	1.41839
Information Criteria			
AICC		0.554443	
HQC		0.595201	
AIC		0.552777	
SBC		0.65763	
FPEC		1.738092	

[Figure 35.5](#) shows the cross covariances of the residuals. The values of the lag zero are slightly different from [Figure 35.4](#) due to the different degrees of freedom.

Figure 35.5 Multivariate Diagnostic Checks

Cross Covariances of Residuals			
Lag	Variable	y1	y2
0	y1	1.26271	0.38948
	y2	0.38948	1.38974
1	y1	0.03121	0.05675
	y2	-0.04646	-0.05398
2	y1	0.08134	0.10599
	y2	0.03482	-0.01549
3	y1	0.01644	0.11734
	y2	0.00609	0.11414

[Figure 35.6](#) and [Figure 35.7](#) show tests for white noise residuals. The output shows that you cannot reject the null hypothesis that the residuals are uncorrelated.

Figure 35.6 Multivariate Diagnostic Checks Continued

Cross Correlations of Residuals			
Lag	Variable	y1	y2
0	y1	1.00000	0.29401
	y2	0.29401	1.00000
1	y1	0.02472	0.04284
	y2	-0.03507	-0.03884
2	y1	0.06442	0.08001
	y2	0.02628	-0.01115
3	y1	0.01302	0.08858
	y2	0.00460	0.08213

Schematic Representation of Cross Correlations of Residuals				
Variable/ Lag	0	1	2	3
y1	++
y2	++

+ is > 2*std error, - is < -2*std error, . is between

Figure 35.7 Multivariate Diagnostic Checks Continued

Portmanteau Test for Cross Correlations of Residuals			
Up To Lag	DF	Chi-Square	Pr > ChiSq
2	4	1.58	0.8124
3	8	2.78	0.9473

The VARMAX procedure provides diagnostic checks for the univariate form of the equations. The table in Figure 35.8 describes how well each univariate equation fits the data. From two univariate regression equations in Figure 35.3, the values of R^2 in the second column are 0.84 and 0.80 for each equation. The standard deviations in the third column are the square roots of the diagonal elements of the covariance matrix from Figure 35.4. The F statistics are in the fourth column for hypotheses to test $\phi_{11} = \phi_{12} = 0$ and $\phi_{21} = \phi_{22} = 0$, respectively, where ϕ_{ij} is the (i, j) th element of the matrix Φ_1 . The last column shows the p -values of the F statistics. The results show that each univariate model is significant.

Figure 35.8 Univariate Diagnostic Checks

Univariate Model ANOVA Diagnostics				
Variable	R-Square	Standard Deviation	F Value	Pr > F
y1	0.8351	1.13523	491.25	<.0001
y2	0.7906	1.19096	366.29	<.0001

The check for white noise residuals in terms of the univariate equation is shown in [Figure 35.9](#). This output contains information that indicates whether the residuals are correlated and heteroscedastic. In the first table, the second column contains the Durbin-Watson test statistics to test the null hypothesis that the residuals are uncorrelated. The third and fourth columns show the Jarque-Bera normality test statistics and their p -values to test the null hypothesis that the residuals have normality. The last two columns show F statistics and their p -values for ARCH(1) disturbances to test the null hypothesis that the residuals have equal covariances. The second table includes F statistics and their p -values for AR(1), AR(1,2), AR(1,2,3) and AR(1,2,3,4) models of residuals to test the null hypothesis that the residuals are uncorrelated.

Figure 35.9 Univariate Diagnostic Checks Continued

Univariate Model White Noise Diagnostics					
Variable	Durbin	Normality		ARCH	
	Watson	Chi-Square	Pr > ChiSq	F Value	Pr > F
y1	1.94534	3.56	0.1686	0.13	0.7199
y2	2.06276	5.42	0.0667	2.10	0.1503

Univariate Model AR Diagnostics								
Variable	AR1		AR2		AR3		AR4	
	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F
y1	0.02	0.8980	0.14	0.8662	0.09	0.9629	0.82	0.5164
y2	0.52	0.4709	0.41	0.6650	0.32	0.8136	0.32	0.8664

The table in [Figure 35.10](#) gives forecasts, their prediction errors, and 95% confidence limits. See the section “[Forecasting](#)” on page 2294 for details.

Figure 35.10 Forecasts

Forecasts						
Variable	Obs	Time	Forecast	Standard Error	95% Confidence Limits	
y1	101	2000	-3.59212	1.13523	-5.81713	-1.36711
	102	2001	-3.09448	1.70915	-6.44435	0.25539
	103	2002	-2.17433	2.14472	-6.37792	2.02925
	104	2003	-1.11395	2.43166	-5.87992	3.65203
	105	2004	-0.14342	2.58740	-5.21463	4.92779
y2	101	2000	-2.09873	1.19096	-4.43298	0.23551
	102	2001	-2.77050	1.47666	-5.66469	0.12369
	103	2002	-2.75724	1.74212	-6.17173	0.65725
	104	2003	-2.24943	2.01925	-6.20709	1.70823
	105	2004	-1.47460	2.25169	-5.88782	2.93863

Bayesian Vector Autoregressive Process

The Bayesian vector autoregressive (BVAR) model is used to avoid problems of collinearity and over-parameterization that often occur with the use of VAR models. BVAR models do this by imposing priors on the AR parameters.

The following statements fit a BVAR(1) model to the simulated data. You specify the PRIOR= option with the hyperparameters. The LAMBDA=0.9 and THETA=0.1 options are hyperparameters controlling the prior covariance. Part of the VARMAX procedure output is shown in [Figure 35.11](#).

```

/*--- Bayesian Vector Autoregressive Process ---*/

proc varmax data=simul1;
  model y1 y2 / p=1 noint
           prior=(lambda=0.9 theta=0.1);
run;

```

The output in [Figure 35.11](#) shows that parameter estimates are slightly different from those in [Figure 35.3](#). By choosing the appropriate priors, you might be able to get more accurate forecasts by using a BVAR model rather than by using an unconstrained VAR model. See the section “[Bayesian VAR and VARX Modeling](#)” on page 2311 for details.

Figure 35.11 Parameter Estimates for the BVAR(1) Model

The VARMAX Procedure						
Type of Model			BVAR(1)			
Estimation Method		Maximum Likelihood Estimation				
Prior Lambda		0.9				
Prior Theta		0.1				
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y1	AR1_1_1	1.05623	0.05050	20.92	0.0001	y1(t-1)
	AR1_1_2	-0.34707	0.04824	-7.19	0.0001	y2(t-1)
y2	AR1_2_1	0.40068	0.04889	8.20	0.0001	y1(t-1)
	AR1_2_2	0.48728	0.05740	8.49	0.0001	y2(t-1)
Covariances of Innovations						
Variable		y1	y2			
y1		1.36278	0.45343			
y2		0.45343	1.48077			

Vector Error Correction Model

A vector error correction model (VECM) can lead to a better understanding of the nature of any non-stationarity among the different component series and can also improve longer term forecasting over an unconstrained model.

The VECM(p) form with the cointegration rank $r(\leq k)$ is written as

$$\Delta \mathbf{y}_t = \boldsymbol{\delta} + \Pi \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \boldsymbol{\epsilon}_t$$

where Δ is the differencing operator, such that $\Delta \mathbf{y}_t = \mathbf{y}_t - \mathbf{y}_{t-1}$; $\Pi = \alpha\beta'$, where α and β are $k \times r$ matrices; Φ_i^* is a $k \times k$ matrix.

It has an equivalent VAR(p) representation as described in the preceding section.

$$\mathbf{y}_t = \boldsymbol{\delta} + (I_k + \Pi + \Phi_1^*) \mathbf{y}_{t-1} + \sum_{i=2}^{p-1} (\Phi_i^* - \Phi_{i-1}^*) \mathbf{y}_{t-i} - \Phi_{p-1}^* \mathbf{y}_{t-p} + \boldsymbol{\epsilon}_t$$

where I_k is a $k \times k$ identity matrix.

Example of Vector Error Correction Model

An example of the second-order nonstationary vector autoregressive model is

$$\mathbf{y}_t = \begin{pmatrix} -0.2 & 0.1 \\ 0.5 & 0.2 \end{pmatrix} \mathbf{y}_{t-1} + \begin{pmatrix} 0.8 & 0.7 \\ -0.4 & 0.6 \end{pmatrix} \mathbf{y}_{t-2} + \boldsymbol{\epsilon}_t$$

with

$$\Sigma = \begin{pmatrix} 100 & 0 \\ 0 & 100 \end{pmatrix} \text{ and } \mathbf{y}_0 = \begin{pmatrix} 0 \\ 0 \end{pmatrix}$$

This process can be given the following VECM(2) representation with the cointegration rank one:

$$\Delta \mathbf{y}_t = \begin{pmatrix} -0.4 \\ 0.1 \end{pmatrix} (1, -2) \mathbf{y}_{t-1} - \begin{pmatrix} 0.8 & 0.7 \\ -0.4 & 0.6 \end{pmatrix} \Delta \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

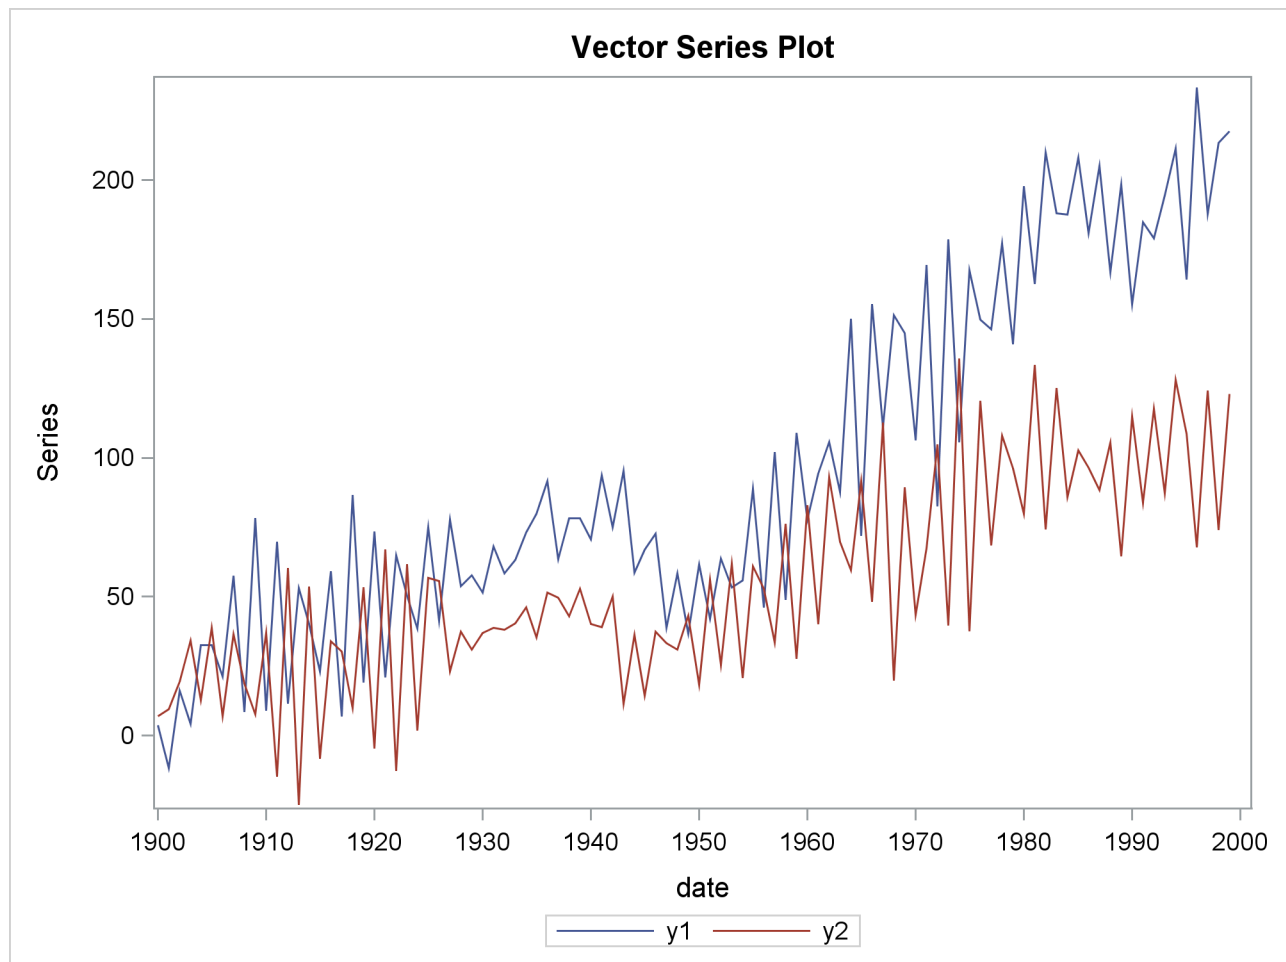
The following PROC IML statements generate simulated data for the VECM(2) form specified above and plot the data as shown in [Figure 35.12](#):

```
proc iml;
  sig = 100*i(2);
  phi = {-0.2 0.1, 0.5 0.2, 0.8 0.7, -0.4 0.6};
  call varmasim(y,phi) sigma=sig n=100 initial=0
               seed=45876;

  cn = {'y1' 'y2'};
  create simul2 from y[colname=cn];
  append from y;
quit;

data simul2;
  set simul2;
  date = intnx( 'year', '01jan1900'd, _n_-1 );
  format date year4. ;
run;

proc timeseries data=simul2 vectorplot=series;
  id date interval=year;
  var y1 y2;
run;
```

Figure 35.12 Plot of Generated Data Process

Cointegration Testing

The following statements use the Johansen cointegration rank test. The COINTTEST=(JOHANSEN) option does the Johansen trace test and is equivalent to specifying COINTTEST with no additional options or the COINTTEST=(JOHANSEN=(TYPE=TRACE)) option.

```
/*--- Cointegration Test ---*/

proc varmax data=simul2;
  model y1 y2 / p=2 noint dftest cointtest=(johansen);
run;
```

Figure 35.13 shows the output for Dickey-Fuller tests for the nonstationarity of each series and Johansen cointegration rank test between series.

Figure 35.13 Dickey-Fuller Tests and Cointegration Rank Test

The VARMAX Procedure						
Unit Root Test						
Variable	Type	Rho	Pr < Rho	Tau	Pr < Tau	
y1	Zero Mean	1.47	0.9628	1.65	0.9755	
	Single Mean	-0.80	0.9016	-0.47	0.8916	
	Trend	-10.88	0.3573	-2.20	0.4815	
y2	Zero Mean	-0.05	0.6692	-0.03	0.6707	
	Single Mean	-6.03	0.3358	-1.72	0.4204	
	Trend	-50.49	0.0003	-4.92	0.0006	
Cointegration Rank Test Using Trace						
H0: Rank=r	H1: Rank>r	Eigenvalue	Trace	5% Critical Value	Drift in ECM	Drift in Process
0	0	0.5086	70.7279	12.21	NOINT	Constant
1	1	0.0111	1.0921	4.14		

In Dickey-Fuller tests, the second column specifies three types of models, which are zero mean, single mean, or trend. The third column (Rho) and the fifth column (Tau) are the test statistics for unit root testing. Other columns are their p -values. You can see that both series have unit roots. For a description of Dickey-Fuller tests, see the section “[PROBDF Function for Dickey-Fuller Tests](#)” on page 162 in Chapter 5, “[SAS Macros and Functions](#).”

In the cointegration rank test, the last two columns explain the drift in the model or process. Since the NOINT option is specified, the model is

$$\Delta \mathbf{y}_t = \Pi \mathbf{y}_{t-1} + \Phi_1^* \Delta \mathbf{y}_{t-1} + \epsilon_t$$

The column Drift In ECM means there is no separate drift in the error correction model, and the column Drift In Process means the process has a constant drift before differencing.

H0 is the null hypothesis, and H1 is the alternative hypothesis. The first row tests $r = 0$ against $r > 0$; the second row tests $r = 1$ against $r > 1$. The Trace test statistics in the fourth column are computed by $-T \sum_{i=r+1}^k \log(1 - \lambda_i)$ where T is the available number of observations and λ_i is the eigenvalue in the third column. By default, the critical values at 5% significance level are used for testing. You can compare the test statistics and critical values in each row. There is one cointegrated process in this example since the Trace statistic for testing $r = 0$ against $r > 0$ is greater than the critical value, but the Trace statistic for testing $r = 1$ against $r > 1$ is not greater than the critical value.

The following statements fit a VECM(2) form to the simulated data. From the result in [Figure 35.13](#), the time series are cointegrated with rank=1. You specify the ECM= option with the RANK=1 option. For normalizing the value of the cointegrated vector, you specify the normalized variable with the NORMALIZE= option. The PRINT=(IARR) option provides the VAR(2) representation. The VARMAX procedure output is shown in [Figure 35.14](#) through [Figure 35.16](#).

```

/*--- Vector Error-Correction Model ---*/

proc varmax data=simul2;
  model y1 y2 / p=2 noint lagmax=3
             ecm=(rank=1 normalize=y1)
             print=(iarr estimates);
run;

```

The ECM= option produces the estimates of the long-run parameter, β , and the adjustment coefficient, α . In Figure 35.14, “1” indicates the first column of the α and β matrices. Since the cointegration rank is 1 in the bivariate system, α and β are two-dimensional vectors. The estimated cointegrating vector is $\hat{\beta} = (1, -1.96)'$. Therefore, the long-run relationship between y_{1t} and y_{2t} is $y_{1t} = 1.96y_{2t}$. The first element of $\hat{\beta}$ is 1 since y_1 is specified as the normalized variable.

Figure 35.14 Parameter Estimates for the VECM(2) Form

The VARMAX Procedure		
Type of Model	VECM(2)	
Estimation Method	Maximum Likelihood Estimation	
Cointegrated Rank	1	
Beta		
Variable	1	
y1	1.00000	
y2	-1.95575	
Alpha		
Variable	1	
y1	-0.46680	
y2	0.10667	

Figure 35.15 shows the parameter estimates in terms of lag one coefficients, y_{t-1} , and lag one first differenced coefficients, Δy_{t-1} , and their significance. “Alpha * Beta” indicates the coefficients of y_{t-1} and is obtained by multiplying the “Alpha” and “Beta” estimates in Figure 35.14. The parameter AR1_i_j corresponds to the elements in the “Alpha * Beta” matrix. The t values and p -values corresponding to the parameters AR1_i_j are missing since the parameters AR1_i_j have non-Gaussian distributions. The parameter AR2_i_j corresponds to the elements in the differenced lagged AR coefficient matrix. The “D_” prefixed to a variable name in Figure 35.15 implies differencing.

Figure 35.15 Parameter Estimates for the VECM(2) Form

Parameter Alpha * Beta' Estimates						
Variable		y1	y2			
y1		-0.46680	0.91295			
y2		0.10667	-0.20862			
AR Coefficients of Differenced Lag						
DIF Lag	Variable	y1	y2			
1	y1	-0.74332	-0.74621			
	y2	0.40493	-0.57157			
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
D_y1	AR1_1_1	-0.46680	0.04786			y1(t-1)
	AR1_1_2	0.91295	0.09359			y2(t-1)
	AR2_1_1	-0.74332	0.04526	-16.42	0.0001	D_y1(t-1)
	AR2_1_2	-0.74621	0.04769	-15.65	0.0001	D_y2(t-1)
D_y2	AR1_2_1	0.10667	0.05146			y1(t-1)
	AR1_2_2	-0.20862	0.10064			y2(t-1)
	AR2_2_1	0.40493	0.04867	8.32	0.0001	D_y1(t-1)
	AR2_2_2	-0.57157	0.05128	-11.15	0.0001	D_y2(t-1)

The fitted model is given as

$$\Delta \mathbf{y}_t = \begin{pmatrix} -0.467 & 0.913 \\ (0.048) & (0.094) \\ 0.107 & -0.209 \\ (0.051) & (0.100) \end{pmatrix} \mathbf{y}_{t-1} + \begin{pmatrix} -0.743 & -0.746 \\ (0.045) & (0.048) \\ 0.405 & -0.572 \\ (0.049) & (0.051) \end{pmatrix} \Delta \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

Figure 35.16 Change the VECM(2) Form to the VAR(2) Model

Infinite Order AR Representation				
Lag	Variable	y1	y2	
1	y1	-0.21013	0.16674	
	y2	0.51160	0.21980	
2	y1	0.74332	0.74621	
	y2	-0.40493	0.57157	
3	y1	0.00000	0.00000	
	y2	0.00000	0.00000	

The PRINT=(IARR) option in the previous SAS statements prints the reparameterized coefficient estimates. For the LAGMAX=3 in the SAS statements, the coefficient matrix of lag 3 is zero.

The VECM(2) form in Figure 35.16 can be rewritten as the following second-order vector autoregressive model:

$$\mathbf{y}_t = \begin{pmatrix} -0.210 & 0.167 \\ 0.512 & 0.220 \end{pmatrix} \mathbf{y}_{t-1} + \begin{pmatrix} 0.743 & 0.746 \\ -0.405 & 0.572 \end{pmatrix} \mathbf{y}_{t-2} + \boldsymbol{\epsilon}_t$$

Bayesian Vector Error Correction Model

Bayesian inference on a cointegrated system begins by using the priors of $\boldsymbol{\beta}$ obtained from the VECM(p) form. Bayesian vector error correction models can improve forecast accuracy for cointegrated processes.

The following statements fit a BVECM(2) form to the simulated data. You specify both the PRIOR= and ECM= options for the Bayesian vector error correction model. The VARMAX procedure output is shown in Figure 35.17.

```
/*--- Bayesian Vector Error-Correction Model ---*/

proc varmax data=simul2;
  model y1 y2 / p=2 noint
             prior=( lambda=0.5 theta=0.2 )
             ecm=( rank=1 normalize=y1 )
             print=(estimates);
run;
```

Figure 35.17 shows the model type fitted to the data, the estimates of the adjustment coefficient (α), the parameter estimates in terms of lag one coefficients (\mathbf{y}_{t-1}), and lag one first differenced coefficients ($\Delta \mathbf{y}_{t-1}$).

Figure 35.17 Parameter Estimates for the BVECM(2) Form

The VARMAX Procedure			
Type of Model	BVECM(2)		
Estimation Method	Maximum Likelihood Estimation		
Cointegrated Rank	1		
Prior Lambda	0.5		
Prior Theta	0.2		
Alpha			
Variable	1		
y1	-0.34392		
y2	0.16659		
Parameter Alpha * Beta' Estimates			
Variable	y1	y2	
y1	-0.34392	0.67262	
y2	0.16659	-0.32581	
AR Coefficients of Differenced Lag			
DIF Lag	Variable	y1	y2
1	y1	-0.80070	-0.59320
	y2	0.33417	-0.53480

Vector Autoregressive Process with Exogenous Variables

A VAR process can be affected by other observable variables that are determined outside the system of interest. Such variables are called exogenous (independent) variables. Exogenous variables can be stochastic or nonstochastic. The process can also be affected by the lags of exogenous variables. A model used to describe this process is called a VARX(p,s) model.

The VARX(p,s) model is written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t$$

where $\mathbf{x}_t = (x_{1t}, \dots, x_{rt})'$ is an r -dimensional time series vector and Θ_i^* is a $k \times r$ matrix.

For example, a VARX(1,0) model is

$$\mathbf{y}_t = \boldsymbol{\delta} + \Phi_1 \mathbf{y}_{t-1} + \Theta_0^* \mathbf{x}_t + \boldsymbol{\epsilon}_t$$

where $\mathbf{y}_t = (y_{1t}, y_{2t}, y_{3t})'$ and $\mathbf{x}_t = (x_{1t}, x_{2t})'$.

The following statements fit the VARX(1,0) model to the given data:

```
data grunfeld;
  input year y1 y2 y3 x1 x2 x3;
  label y1='Gross Investment GE'
        y2='Capital Stock Lagged GE'
        y3='Value of Outstanding Shares GE Lagged'
        x1='Gross Investment W'
        x2='Capital Stock Lagged W'
        x3='Value of Outstanding Shares Lagged W';
datalines;
1935  33.1 1170.6  97.8 12.93  191.5   1.8
1936  45.0 2015.8 104.4 25.90  516.0   .8
1937  77.2 2803.3 118.0 35.05  729.0   7.4

... more lines ...

/*--- Vector Autoregressive Process with Exogenous Variables ---*/

proc varmax data=grunfeld;
  model y1-y3 = x1 x2 / p=1 lagmax=5
                    printform=univariate
                    print=(impulsx=(all) estimates);
run;
```

The VARMAX procedure output is shown in [Figure 35.18](#) through [Figure 35.20](#).

[Figure 35.18](#) shows the descriptive statistics for the dependent (endogenous) and independent (exogenous) variables with labels.

Figure 35.18 Descriptive Statistics for the VARX(1, 0) Model

The VARMAX Procedure						
		Number of Observations		20		
		Number of Pairwise Missing		0		
Simple Summary Statistics						
Variable Type		N	Mean	Standard Deviation	Min	Max
y1	Dependent	20	102.29000	48.58450	33.10000	189.60000
y2	Dependent	20	1941.32500	413.84329	1170.60000	2803.30000
y3	Dependent	20	400.16000	250.61885	97.80000	888.90000
x1	Independent	20	42.89150	19.11019	12.93000	90.08000
x2	Independent	20	670.91000	222.39193	191.50000	1193.50000
Simple Summary Statistics						
Variable Label						
y1	Gross Investment GE					
y2	Capital Stock Lagged GE					
y3	Value of Outstanding Shares GE Lagged					
x1	Gross Investment W					
x2	Capital Stock Lagged W					

Figure 35.19 shows the parameter estimates for the constant, the lag zero coefficients of exogenous variables, and the lag one AR coefficients. From the schematic representation of parameter estimates, the significance of the parameter estimates can be easily verified. The symbol “C” means the constant and “XL0” means the lag zero coefficients of exogenous variables.

Figure 35.19 Parameter Estimates for the VARX(1, 0) Model

The VARMAX Procedure				
Type of Model		VARX(1,0)		
Estimation Method		Least Squares Estimation		
Constant				
	Variable	Constant		
	y1	-12.01279		
	y2	702.08673		
	y3	-22.42110		
XLag				
Lag	Variable	x1	x2	
0	y1	1.69281	-0.00859	
	y2	-6.09850	2.57980	
	y3	-0.02317	-0.01274	
AR				
Lag	Variable	y1	y2	y3
1	y1	0.23699	0.00763	0.02941
	y2	-2.46656	0.16379	-0.84090
	y3	0.95116	0.00224	0.93801
Schematic Representation				
Variable/ Lag				
	C	XL0	AR1	
y1	.	+.	
y2	+	
y3	-	..	+.+	
+ is > 2*std error, -				
is < -2*std error, .				
is between, * is N/A				

Figure 35.20 shows the parameter estimates and their significance.

Figure 35.20 Parameter Estimates for the VARX(1, 0) Model Continued

Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y1	CONST1	-12.01279	27.47108	-0.44	0.6691	1
	XL0_1_1	1.69281	0.54395	3.11	0.0083	x1(t)
	XL0_1_2	-0.00859	0.05361	-0.16	0.8752	x2(t)
	AR1_1_1	0.23699	0.20668	1.15	0.2722	y1(t-1)
	AR1_1_2	0.00763	0.01627	0.47	0.6470	y2(t-1)
y2	AR1_1_3	0.02941	0.04852	0.61	0.5548	y3(t-1)
	CONST2	702.08673	256.48046	2.74	0.0169	1
	XL0_2_1	-6.09850	5.07849	-1.20	0.2512	x1(t)
	XL0_2_2	2.57980	0.50056	5.15	0.0002	x2(t)
	AR1_2_1	-2.46656	1.92967	-1.28	0.2235	y1(t-1)
y3	AR1_2_2	0.16379	0.15193	1.08	0.3006	y2(t-1)
	AR1_2_3	-0.84090	0.45304	-1.86	0.0862	y3(t-1)
	CONST3	-22.42110	10.31166	-2.17	0.0487	1
	XL0_3_1	-0.02317	0.20418	-0.11	0.9114	x1(t)
	XL0_3_2	-0.01274	0.02012	-0.63	0.5377	x2(t)
	AR1_3_1	0.95116	0.07758	12.26	0.0001	y1(t-1)
	AR1_3_2	0.00224	0.00611	0.37	0.7201	y2(t-1)
	AR1_3_3	0.93801	0.01821	51.50	0.0001	y3(t-1)

The fitted model is given as

$$\begin{pmatrix} y_{1t} \\ y_{2t} \\ y_{3t} \end{pmatrix} = \begin{pmatrix} -12.013 \\ (27.471) \\ 702.086 \\ (256.480) \\ -22.421 \\ (10.312) \end{pmatrix} + \begin{pmatrix} 1.693 & -0.009 \\ (0.544) & (0.054) \\ -6.099 & 2.580 \\ (5.078) & (0.501) \\ -0.023 & -0.013 \\ (0.204) & (0.020) \end{pmatrix} \begin{pmatrix} x_{1t} \\ x_{2t} \end{pmatrix} \\
 + \begin{pmatrix} 0.237 & 0.008 & 0.029 \\ (0.207) & (0.016) & (0.049) \\ -2.467 & 0.164 & -0.841 \\ (1.930) & (0.152) & (0.453) \\ 0.951 & 0.002 & 0.938 \\ (0.078) & (0.006) & (0.018) \end{pmatrix} \begin{pmatrix} y_{1,t-1} \\ y_{2,t-1} \\ y_{3,t-1} \end{pmatrix} + \begin{pmatrix} \epsilon_{1t} \\ \epsilon_{2t} \\ \epsilon_{3t} \end{pmatrix}$$

Parameter Estimation and Testing on Restrictions

In the previous example, the VARX(1,0) model is written as

$$y_t = \delta + \Theta_0^* x_t + \Phi_1 y_{t-1} + \epsilon_t$$

with

$$\Theta_0^* = \begin{pmatrix} \theta_{11}^* & \theta_{12}^* \\ \theta_{21}^* & \theta_{22}^* \\ \theta_{31}^* & \theta_{32}^* \end{pmatrix} \quad \Phi_1 = \begin{pmatrix} \phi_{11} & \phi_{12} & \phi_{13} \\ \phi_{21} & \phi_{22} & \phi_{23} \\ \phi_{31} & \phi_{32} & \phi_{33} \end{pmatrix}$$

In [Figure 35.20](#) of the preceding section, you can see several insignificant parameters. For example, the coefficients XL0_1_2, AR1_1_2, and AR1_3_2 are insignificant.

The following statements restrict the coefficients of $\theta_{12}^* = \phi_{12} = \phi_{32} = 0$ for the VARX(1,0) model.

```
/*--- Models with Restrictions and Tests ---*/

proc varmax data=grunfeld;
  model y1-y3 = x1 x2 / p=1 print=(estimates);
  restrict XL(0,1,2)=0, AR(1,1,2)=0, AR(1,3,2)=0;
run;
```

The output in [Figure 35.21](#) shows that three parameters θ_{12}^* , ϕ_{12} , and ϕ_{32} are replaced by the restricted values, zeros. In the schematic representation of parameter estimates, the three restricted parameters θ_{12}^* , ϕ_{12} , and ϕ_{32} are replaced by *.

Figure 35.21 Parameter Estimation with Restrictions

The VARMAX Procedure				
XLag				
Lag	Variable	x1	x2	
0	y1	1.67592	0.00000	
	y2	-6.30880	2.65308	
	y3	-0.03576	-0.00919	
AR				
Lag	Variable	y1	y2	y3
1	y1	0.27671	0.00000	0.01747
	y2	-2.16968	0.10945	-0.93053
	y3	0.96398	0.00000	0.93412
Schematic Representation				
Variable/ Lag	C	XL0	AR1	
y1	.	++	.*.	
y2	+	+.+	..-	
y3	-	..	+++	
+ is > 2*std error, -				
is < -2*std error, .				
is between, * is N/A				

The output in Figure 35.22 shows the estimates of the Lagrangian parameters and their significance. Based on the p -values associated with the Lagrangian parameters, you cannot reject the null hypotheses $\theta_{12}^* = 0$, $\phi_{12} = 0$, and $\phi_{32} = 0$ with the 0.05 significance level.

Figure 35.22 RESTRICT Statement Results

Testing of the Restricted Parameters				
Parameter	Estimate	Standard Error	t Value	Pr > t
XL0_1_2	1.74969	21.44026	0.08	0.9389
AR1_1_2	30.36254	70.74347	0.43	0.6899
AR1_3_2	55.42191	164.03075	0.34	0.7524

The TEST statement in the following example tests $\phi_{31} = 0$ and $\theta_{12}^* = \phi_{12} = \phi_{32} = 0$ for the VARX(1,0) model:

```

proc varmax data=grunfeld;
  model y1-y3 = x1 x2 / p=1;
  test AR(1,3,1)=0;
  test XL(0,1,2)=0, AR(1,1,2)=0, AR(1,3,2)=0;
run;

```

The output in Figure 35.23 shows that the first column in the output is the index corresponding to each TEST statement. You can reject the hypothesis test $\phi_{31} = 0$ at the 0.05 significance level, but you cannot reject the joint hypothesis test $\theta_{12}^* = \phi_{12} = \phi_{32} = 0$ at the 0.05 significance level.

Figure 35.23 TEST Statement Results

The VARMAX Procedure				
Testing of the Parameters				
Test	DF	Chi-Square	Pr > ChiSq	
1	1	150.31	<.0001	
2	3	0.34	0.9522	

Causality Testing

The following statements use the CAUSAL statement to compute the Granger causality test for a VAR(1) model. For the Granger causality tests, the autoregressive order should be defined by the P= option in the MODEL statement. The variable groups are defined in the MODEL statement as well. Regardless of whether the variables specified in the GROUP1= and GROUP2= options are designated as dependent or exogenous (independent) variables in the MODEL statement, the CAUSAL statement fits the VAR(p) model by considering the variables in the two groups as dependent variables.

```

/*--- Causality Testing ---*/

proc varmax data=grunfeld;
  model y1-y3 = x1 x2 / p=1 noprint;
  causal group1=(x1) group2=(y1-y3);
  causal group1=(y3) group2=(y1 y2);
run;

```

The output in Figure 35.24 is associated with the CAUSAL statement. The first CAUSAL statement fits the VAR(1) model by using the variables y1, y2, y3, and x1. The second CAUSAL statement fits the VAR(1) model by using the variables y1, y3, and y2.

Figure 35.24 CAUSAL Statement Results

The VARMAX Procedure			
Granger-Causality Wald Test			
Test	DF	Chi-Square	Pr > ChiSq
1	3	2.40	0.4946
2	2	262.88	<.0001
Test 1: Group 1 Variables: x1			
Group 2 Variables: y1 y2 y3			
Test 2: Group 1 Variables: y3			
Group 2 Variables: y1 y2			

The null hypothesis of the Granger causality test is that GROUP1 is influenced only by itself, and not by GROUP2.

The first column in the output is the index corresponding to each CAUSAL statement. The output shows that you cannot reject that $x1$ is influenced by itself and not by ($y1$, $y2$, $y3$) at the 0.05 significance level for Test 1. You can reject that $y3$ is influenced by itself and not by ($y1$, $y2$) for Test 2. See the section “VAR and VARX Modeling” on page 2305 for details.

Syntax: VARMAX Procedure

```

PROC VARMAX options ;
  BY variables ;
  CAUSAL GROUP1=(variables) GROUP2=(variables) ;
  COINTEG RANK=number < options > ;
  ID variable INTERVAL=value < ALIGN=value > ;
  MODEL dependents < = regressors > < , dependents < = regressors > ... > < / options > ;
  GARCH options ;
  NLOPTIONS options ;
  OUTPUT < options > ;
  RESTRICT restriction, ..., restriction ;
  TEST restriction, ..., restriction ;

```

Functional Summary

The statements and options used with the VARMAX procedure are summarized in the following table:

Table 35.1 VARMAX Functional Summary

Description	Statement	Option
Data Set Options		
Specifies the input data set	VARMAX	DATA=
Writes parameter estimates to an output data set	VARMAX	OUTEST=
include covariances in the OUTEST= data set	VARMAX	OUTCOV
Writes the diagnostic checking tests for a model and the cointegration test results to an output data set	VARMAX	OUTSTAT=
Writes actuals, predictions, residuals, and confidence limits to an output data set	OUTPUT	OUT=
Writes the conditional covariance matrix to an output data set	GARCH	OUTHT=
BY Groups		
Specifies BY-group processing	BY	
ID Variable		
Specifies the identifying variable	ID	
Specifies the time interval between observations	ID	INTERVAL=
Controls the alignment of SAS date values	ID	ALIGN=
Options to Control the Optimization Process		
Specifies the optimization options	NLOPTIONS	
Printing Control Options		
Specifies how many lags to print results	MODEL	LAGMAX=
Suppresses the printed output	MODEL	NOPRINT
Requests all printing options	MODEL	PRINTALL
Requests the printing format	MODEL	PRINTFORM=
Controls plots produced through ODS GRAPHICS	VARMAX	PLOTS=
PRINT= Option		
Prints the correlation matrix of parameter estimates	MODEL	CORRB
Prints the cross-correlation matrices of independent variables	MODEL	CORRX
Prints the cross-correlation matrices of dependent variables	MODEL	CORRY
Prints the covariance matrices of prediction errors	MODEL	COVPE
Prints the cross-covariance matrices of the independent variables	MODEL	COVX
Prints the cross-covariance matrices of the dependent variables	MODEL	COVY
Prints the covariance matrix of parameter estimates	MODEL	COVB
Prints the decomposition of the prediction error covariance matrix	MODEL	DECOMPOSE

Table 35.1 *continued*

Description	Statement	Option
Prints the residual diagnostics	MODEL	DIAGNOSE
Prints the contemporaneous relationships among the components of the vector time series	MODEL	DYNAMIC
Prints the parameter estimates	MODEL	ESTIMATES
Prints the infinite order AR representation	MODEL	IARR
Prints the impulse response function	MODEL	IMPULSE=
Prints the impulse response function in the transfer function	MODEL	IMPULSX=
Prints the partial autoregressive coefficient matrices	MODEL	PARCOEF
Prints the partial canonical correlation matrices	MODEL	PCANCORR
Prints the partial correlation matrices	MODEL	PCORR
Prints the eigenvalues of the companion matrix	MODEL	ROOTS
Prints the Yule-Walker estimates	MODEL	YW
Model Estimation and Order Selection Options		
Centers the dependent variables	MODEL	CENTER
Specifies the degrees of differencing for the specified model variables	MODEL	DIF=
Specifies the degrees of differencing for all independent variables	MODEL	DIFX=
Specifies the degrees of differencing for all dependent variables	MODEL	DIFY=
Specifies the vector error correction model	MODEL	ECM=
Specifies the estimation method	MODEL	METHOD=
Selects the tentative order	MODEL	MINIC=
Suppresses the current values of independent variables	MODEL	NOCURRENTX
Suppresses the intercept parameters	MODEL	NOINT
Specifies the number of seasonal periods	MODEL	NSEASON=
Specifies the order of autoregressive polynomial	MODEL	P=
Specifies the Bayesian prior model	MODEL	PRIOR=
Specifies the order of moving-average polynomial	MODEL	Q=
Centers the seasonal dummies	MODEL	SCENTER
Specifies the degree of time trend polynomial	MODEL	TREND=
Specifies the denominator for error covariance matrix estimates	MODEL	VARDEF=
Specifies the lag order of independent variables	MODEL	XLAG=
GARCH Related Options		
Specifies the GARCH-type model	GARCH	FORM=
Specifies the order of the GARCH polynomial	GARCH	P=
Specifies the order of the ARCH polynomial	GARCH	Q=

Table 35.1 *continued*

Description	Statement	Option
Cointegration Related Options		
Prints the results from the weak exogeneity test of the long-run parameters	COINTEG	EXOGENEITY
Specifies the restriction on the cointegrated coefficient matrix	COINTEG	H=
Specifies the restriction on the adjustment coefficient matrix	COINTEG	J=
Specifies the variable name whose cointegrating vectors are normalized	COINTEG	NORMALIZE=
Specifies a cointegration rank	COINTEG	RANK=
Prints the Johansen cointegration rank test	MODEL	COINTTEST= (JOHANSEN=)
Prints the Stock-Watson common trends test	MODEL	COINTTEST=(SW=)
Prints the Dickey-Fuller unit root test	MODEL	DFTEST=
Tests and Restrictions on Parameters		
Tests the Granger causality	CAUSAL	GROUP1= GROUP2=
Places and tests restrictions on parameter estimates	RESTRICT	
Tests hypotheses on parameter estimates	TEST	
Forecasting Control Options		
Specifies the size of confidence limits for forecasting	OUTPUT	ALPHA=
Starts forecasting before end of the input data	OUTPUT	BACK=
Specifies how many periods to forecast	OUTPUT	LEAD=
Suppresses the printed forecasts	OUTPUT	NOPRINT

PROC VARMAX Statement

PROC VARMAX *options* ;

The following options can be used in the PROC VARMAX statement:

DATA=SAS-data-set

specifies the input SAS data set. If the DATA= option is not specified, the PROC VARMAX statement uses the most recently created SAS data set.

OUTEST=SAS-data-set

writes the parameter estimates to the output data set.

COVOUT

OUTCOV

writes the covariance matrix for the parameter estimates to the OUTEST= data set. This option is valid only if the OUTEST= option is specified.

OUTSTAT=SAS-data-set

writes residual diagnostic results to an output data set. If the COINTTEST=(JOHANSEN) option is specified, the results of this option are also written to the output data set.

The following statements are the examples of these options in the PROC VARMAX statement:

```
proc varmax data=one outest=est outcov outstat=stat;
  model y1-y3 / p=1;
run;

proc varmax data=one outest=est outstat=stat;
  model y1-y3 / p=1 cointtest=(johansen);
run;
```

PLOTS<(global-plot-option)> = plot-request-option <(options)>

PLOTS<(global-plot-option)> = (plot-request-option <(options)> ... plot-request-option <(options)>)

controls the plots produced through ODS Graphics. When you specify only one plot, you can omit the parentheses around the plot request. Some examples follow:

```
plots=none
plots=all
plots(unpack)=residual(residual normal)
plots=(forecasts model)
```

For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

```
proc varmax data=one plots=impulse(simple);
  model y1-y3 / p=1;
run;

proc varmax data=one plots=(model residual);
  model y1-y3 / p=1;
run;

proc varmax data=one plots=forecasts;
  model y1-y3 / p=1;
  output lead=12;
run;
```

The first VARMAX program produces the simple response impulse plots. The second VARMAX program produces the plots associated with the model and prediction errors. The plots associated with prediction errors are the ACF, PACF, IACF, distribution, white-noise, and Normal quantile plots and the prediction error plot. The third VARMAX program produces the FORECASTS and FORECAST-ONLY plots.

The *global-plot-option* applies to the impulse and prediction error analysis plots generated by the VARMAX procedure. The following *global-plot-option* is available:

UNPACK breaks a graphic that is otherwise paneled into individual component plots.

The following *plot-request-options* are available:

ALL produces all plots appropriate for the particular analysis.

FORECASTS <(forecasts-plot-options)> produces plots of the forecasts. The forecasts-only plot that shows the multistep forecasts in the forecast region is produced by default. The following *forecasts-plot-options* are available:

ALL produces the FORECASTSONLY and the FORECASTS plots. This is the default.

FORECASTS produces a plot that shows the one-step-ahead as well as the multistep forecasts.

FORECASTSONLY produces a plot that shows only the multistep forecasts.

IMPULSE <(impulse-plot-options)> produces the plots of impulse response function and the impulse response of the transfer function.

ALL produces all impulse plots. This is the default.

ACCUM produces the accumulated impulse plot.

ORTH produces the orthogonalized impulse plot.

SIMPLE produces the simple impulse plot.

MODEL produces plots of dependent variables listed in the MODEL statement and plots of the one-step-ahead predicted values for each dependent variables.

NONE suppresses all plots.

RESIDUAL <(residual-plot-options)> produces plots associated with the prediction errors obtained after modeling the data. The following *residual-plot-options* are available:

ALL produces all plots associated with the analysis of the prediction errors. This is the default.

RESIDUAL produces prediction error plot.

DIAGNOSTICS produces a panel of plots useful in assessing the autocorrelations and white-noise of the prediction errors. The panel consists of the following:

- the autocorrelation plot of the prediction errors
- the partial autocorrelation plot of the prediction errors
- the inverse autocorrelation plot of the prediction errors
- the log scaled white noise plot of the prediction errors

NORMAL produces a panel of plots useful in assessing normality of the prediction errors. The panel consists of the following:

- distribution of the prediction errors with overlaid the normal curve
- normal quantile plot of the prediction errors

Other Options

In addition, any of the following MODEL statement options can be specified in the PROC VARMAX statement, which is equivalent to specifying the option for every MODEL statement: CENTER, DFTEST=, DIF=, DIFX=, DIFY=, LAGMAX=, METHOD=, MINIC=, NOCURRENTX, NOINT, NOPRINT, NSEASON=, P=, PRINT=, PRINTALL, PRINTFORM=, Q=, SCENTER, TREND=, VARDEF=, and XLAG= options.

The following is an example of the options in the PROC VARMAX statement:

```
proc varmax data=one lagmax=3 method=ml;
    model y1-y3 / p=1;
run;
```

BY Statement

BY variables ;

A BY statement can be used with PROC VARMAX to obtain separate analyses on observations in groups defined by the BY variables.

When a BY statement appears, the procedure expects the input data set to be sorted in order of the BY variables.

If your input data set is not sorted in ascending order, use one of the following alternatives:

- Sort the data using the SORT procedure with a similar BY statement.
- Specify the BY statement option NOTSORTED or DESCENDING in the BY statement for the VARMAX procedure. The NOTSORTED option does not mean that the data are unsorted but rather that the data are arranged in groups (according to values of the BY variables) and that these groups are not necessarily in alphabetical or increasing numeric order.
- Create an index on the BY variables using the DATASETS procedure.

For more information about the BY statement, see in *SAS Language Reference: Concepts*. For more information about the DATASETS procedure, see the discussion in the *Base SAS Procedures Guide*.

The following is an example of the BY statement:

```
proc varmax data=one;
    by region;
```

```

model y1-y3 / p=1;
run;

```

CAUSAL Statement

CAUSAL GROUP1=(variables) GROUP2=(variables) ;

A CAUSAL statement prints the Granger causality test by fitting the VAR(p) model by using all variables defined in GROUP1 and GROUP2. Any number of CAUSAL statements can be specified. The CAUSAL statement proceeds with the MODEL statement and uses the variables and the autoregressive order, p , specified in the MODEL statement. Variables in the GROUP1= and GROUP2= options should be defined in the MODEL statement. If the P=0 option is specified in the MODEL statement, the CAUSAL statement is not applicable.

The null hypothesis of the Granger causality test is that GROUP1 is influenced only by itself, and not by GROUP2. If the hypothesis test fails to reject the null, then the variables listed in GROUP1 might be considered as independent variables.

See the section “VAR and VARX Modeling” on page 2305 for details.

The following is an example of the CAUSAL statement. You specify the CAUSAL statement with the GROUP1= and GROUP2= options.

```

proc varmax data=one;
  model y1-y3 = x1 / p=1;
  causal group1=(x1) group2=(y1-y3);
  causal group1=(y2) group2=(y1 y3);
run;

```

The first CAUSAL statement fits the VAR(1) model by using the variables y1, y2, y3, and x1 and tests the null hypothesis that x1 causes the other variables, y1, y2, and y3, but the other variables do not cause x1. The second CAUSAL statement fits the VAR(1) model by using the variables y1, y3, and y2 and tests the null hypothesis that y2 causes the other variables, y1 and y3, but the other variables do not cause y2.

COINTEG Statement

**COINTEG RANK=number <H=(matrix)> <J=(matrix)>
< EXOGENEITY > < NORMALIZE=variable > ;**

The COINTEG statement fits the vector error correction model to the data, tests the restrictions of the long-run parameters and the adjustment parameters, and tests for the weak exogeneity in the long-run parameters. The cointegrated system uses the maximum likelihood analysis proposed by Johansen and Juselius (1990) and Johansen (1995a, 1995b). Only one COINTEG statement is allowed.

You specify the ECM= option in the MODEL statement or the COINTEG statement to fit the VECM(p). The P= option in the MODEL statement is used to specify the autoregressive order of the VECM.

The following statements are equivalent for fitting a VECM(2).

```
proc varmax data=one;
  model y1-y3 / p=2 ecm=(rank=1);
run;
```

```
proc varmax data=one;
  model y1-y3 / p=2;
  cointeg rank=1;
run;
```

To test restrictions of either α or β or both, you specify either J= or H= or both, respectively. You specify the EXOGENEITY option in the COINTEG statement for tests of the weak exogeneity in the long-run parameters.

The following is an example of the COINTEG statement.

```
proc varmax data=one;
  model y1-y3 / p=2;
  cointeg rank=1 h=(1 0, -1 0, 0 1)
                j=(1 0, 0 0, 0 1) exogeneity;
run;
```

The following options can be used in the COINTEG statement:

EXOGENEITY

formulates the likelihood ratio tests for testing weak exogeneity in the long-run parameters. The null hypothesis is that one variable is weakly exogenous for the others.

H=(matrix)

specifies the restrictions H on the $k \times r$ or $(k + 1) \times r$ cointegrated coefficient matrix β such that $\beta = H\phi$, where H is known and ϕ is unknown. If the VECM(p) is specified with the COINTEG statement or with the ECM= option in the MODEL statement and the ECTREND option is not included with the ECM= specification, then the H matrix has dimension $k \times m$. If the VECM(p) is specified with the COINTEG statement or with the ECM= option in the MODEL statement and the ECTREND option is also used, then the H matrix has dimension $(k + 1) \times m$. Here k is the number of dependent variables, and m is $r \leq m < k$ where r is defined with the RANK= r option.

For example, consider a system that contains four variables and the RANK=1 option with $\beta = (\beta_1, \beta_2, \beta_3, \beta_4)'$. The restriction matrix for the test of $\beta_1 + \beta_2 = 0$ can be specified as

```
cointeg rank=1 h=(1 0 0, -1 0 0, 0 1 0, 0 0 1);
```

Here the matrix H is 4×3 where $k = 4$ and $m = 3$, and each row of the matrix H is separated by commas.

When the series has no separate deterministic trend, the constant term should be restricted by $\alpha'_{\perp} \delta = 0$. In the preceding example, the β can be either $\beta = (\beta_1, \beta_2, \beta_3, \beta_4, 1)'$ or $\beta = (\beta_1, \beta_2, \beta_3, \beta_4, t)'$. You can specify the restriction matrix for the previous test of $\beta_1 + \beta_2 = 0$ as follows:


```
cointeg rank=1
  h=(1 0 0 0, -1 0 0 0, 0 1 0 0, 0 0 1 0, 0 0 0 1);
```

When the cointegrated system contains three dependent variables and the RANK=2 option, you can specify the restriction matrix for the test of $\beta_{1j} = -\beta_{2j}$ for $j = 1, 2$ as follows:

```
cointeg rank=2 h=(1 0, -1 0, 0 1);
```

J=(matrix)

specifies the restrictions J on the $k \times r$ adjustment matrix α such that $\alpha = J\psi$, where J is known and ψ is unknown. The $k \times m$ matrix J is specified by using this option, where k is the number of dependent variables, m is $r \leq m < k$, and r is defined with the RANK= r option.

For example, when the system contains four variables and the RANK=1 option is used, you can specify the restriction matrix for the test of $\alpha_j = 0$ for $j = 2, 3, 4$ as follows:

```
cointeg rank=1 j=(1, 0, 0, 0);
```

When the system contains three variables and the RANK=2 option, you can specify the restriction matrix for the test of $\alpha_{2j} = 0$ for $j = 1, 2$ as follows:

```
cointeg rank=2 j=(1 0, 0 0, 0 1);
```

NORMALIZE=variable

specifies a single dependent (endogenous) variable name whose cointegrating vectors are normalized. If the variable name is different from that specified in the COINTTEST=(JOHANSEN=) or ECM= option in the MODEL statement, the variable name specified in the COINTEG statement is used. If the normalized variable is not specified, cointegrating vectors are not normalized.

RANK=number

specifies the cointegration rank of the cointegrated system. This option is required in the COINTEG statement. The rank of cointegration should be greater than zero and less than the number of dependent (endogenous) variables. If the value of the RANK= option in the COINTEG statement is different from that specified in the ECM= option, the rank specified in the COINTEG statement is used.

ID Statement

ID variable INTERVAL=value < ALIGN=value > ;

The ID statement specifies a variable that identifies observations in the input data set. The datetime variable specified in the ID statement is included in the OUT= data set if the OUTPUT statement is specified. The ID *variable* is usually a SAS datetime variable. The values of the ID variable are extrapolated for the forecast observations based on the value of the INTERVAL= option.

ALIGN= value

controls the alignment of SAS dates used to identify output observations. The ALIGN= option allows the following values: BEGINNING | BEG | B, MIDDLE | MID | M, and ENDING | END | E. The default is BEGINNING. The ALIGN= option is used to align the ID variable to the beginning, middle, or end of the time ID interval specified by the INTERVAL= option.

INTERVAL= value

specifies the time interval between observations. This option is required in the ID statement. The INTERVAL= option is used in conjunction with the ID variable to check that the input data are in order and have no missing periods. The INTERVAL= option is also used to extrapolate the ID values past the end of the input data when the OUTPUT statement is specified.

The following is an example of the ID statement:

```
proc varmax data=one;
  id date interval=qtr align=mid;
  model y1-y3 / p=1;
run;
```

MODEL Statement

MODEL *dependents < = regressors >*
 < , *dependents < = regressors > ... >*
 < / options > ;

The MODEL statement specifies dependent (endogenous) variables and independent (exogenous) variables for the VARMAX model. The multivariate model can have the same or different independent variables corresponding to the dependent variables. As a special case, the VARMAX procedure allows you to analyze one dependent variable. Only one MODEL statement is allowed.

For example, the following statements are equivalent ways of specifying the multivariate model for the vector (y1, y2, y3):

```
model y1 y2 y3 </options>;
model y1-y3 </options>;
```

The following statements are equivalent ways of specifying the multivariate model with independent variables, where y1, y2, y3, and y4 are the dependent variables and x1, x2, x3, x4, and x5 are the independent variables:

```
model y1 y2 y3 y4 = x1 x2 x3 x4 x5 </options>;
model y1 y2 y3 y4 = x1-x5 </options>;
model y1 = x1-x5, y2 = x1-x5, y3 y4 = x1-x5 </options>;
model y1-y4 = x1-x5 </options>;
```

When the multivariate model has different independent variables that correspond to each of the dependent variables, equations are separated by commas (,) and the model can be specified as illustrated by the following MODEL statement:

```
model y1 = x1-x3, y2 = x3-x5, y3 y4 = x1-x5 </options>;
```

The following options can be used in the MODEL statement after a forward slash (/):

CENTER

centers the dependent (endogenous) variables by subtracting their means. Note that centering is done after differencing when the DIF= or DIFY= option is specified. If there are exogenous (independent) variables, this option is not applicable.

```
model y1 y2 / p=1 center;
```

DIF(*variable (number-list) < ... variable (number-list) >*)

DIF=(*variable (number-list) < ... variable (number-list) >*)

specifies the degrees of differencing to be applied to the specified dependent or independent variables. The *number-list* must contain one or more numbers, each of which should be greater than zero. The differencing can be the same for all variables, or it can vary among variables. For example, the DIF=($y_1(1,4)$ $y_3(1)$ $x_2(2)$) option specifies that the series y_1 is differenced at lag 1 and at lag 4, which is

$$(1 - B^4)(1 - B)y_{1t} = (y_{1t} - y_{1,t-1}) - (y_{1,t-4} - y_{1,t-5})$$

the series y_3 is differenced at lag 1, which is $(y_{3t} - y_{3,t-1})$; and the series x_2 is differenced at lag 2, which is $(x_{2t} - x_{2,t-2})$.

The following uses the data dy_1 , y_2 , x_1 , and dx_2 , where $dy_1 = (1 - B)y_{1t}$ and $dx_2 = (1 - B)^2x_{2t}$.

```
model y1 y2 = x1 x2 / p=1 dif=(y1(1) x2(2));
```

DIFX(*number-list*)

DIFX=(*number-list*)

specifies the degrees of differencing to be applied to all independent variables. The *number-list* must contain one or more numbers, each of which should be greater than zero. For example, the DIFX=(1) option specifies that all of the independent series are differenced once at lag 1. The DIFX=(1,4) option specifies that all of the independent series are differenced at lag 1 and at lag 4. If independent variables are specified in the DIF= option, then the DIFX= option is ignored.

The following statement uses the data y_1 , y_2 , dx_1 , and dx_2 , where $dx_1 = (1 - B)x_{1t}$ and $dx_2 = (1 - B)x_{2t}$.

```
model y1 y2 = x1 x2 / p=1 difx(1);
```

DIFY(*number-list*)

DIFY=(*number-list*)

specifies the degrees of differencing to be applied to all dependent (endogenous) variables. The *number-list* must contain one or more numbers, each of which should be greater than zero. For details, see the DIFX= option. If dependent variables are specified in the DIF= option, then the DIFY= option is ignored.

```
model y1 y2 / p=1 dify(1);
```

METHOD=*value*

requests the type of estimates to be computed. The possible values of the METHOD= option are as follows:

LS specifies least squares estimates.
ML specifies maximum likelihood estimates.

When the ECM=, PRIOR=, and Q= options and the GARCH statement are specified, the default ML method is used regardless of the method given by the METHOD= option.

```
model y1 y2 / p=1 method=ml;
```

NOCURRENTX

suppresses the current values x_t of the independent variables. In general, the VARX(p, s) model is

$$y_t = \delta + \sum_{i=1}^p \Phi_i y_{t-i} + \sum_{i=0}^s \Theta_i^* x_{t-i} + \epsilon_t$$

where p is the number of lags of the dependent variables included in the model, and s is the number of lags of the independent variables included in the model, including the contemporaneous values of x_t .

A VARX(1,2) model can be specified as:

```
model y1 y2 = x1 x2 / p=1 xlag=2;
```

If the NOCURRENTX option is specified, it suppresses the current values x_t and starts with x_{t-1} . The VARX(p, s) model is redefined as:

$$y_t = \delta + \sum_{i=1}^p \Phi_i y_{t-i} + \sum_{i=1}^s \Theta_i^* x_{t-i} + \epsilon_t$$

This model with $p = 1$ and $s = 2$ can be specified as:

```
model y1 y2 = x1 x2 / p=1 xlag=2 nocurrentx;
```

NOINT

suppresses the intercept parameter δ .

```
model y1 y2 / p=1 noint;
```

NSEASON=*number*

specifies the number of seasonal periods. When the NSEASON=*number* option is specified, (*number* - 1) seasonal dummies are added to the regressors. If the NOINT option is specified, the NSEASON= option is not applicable.

```
model y1 y2 / p=1 nseason=4;
```

SCENTER

centers seasonal dummies specified by the NSEASON= option. The centered seasonal dummies are generated by $c - (1/s)$, where c is a seasonal dummy generated by the NSEASON= s option.

```
model y1 y2 / p=1 nseason=4 scenter;
```

TREND=value

specifies the degree of deterministic time trend included in the model. Valid values are as follows:

LINEAR	includes a linear time trend as a regressor.
QUAD	includes linear and quadratic time trends as regressors.

The TREND=QUAD option is not applicable for a cointegration analysis.

```
model y1 y2 / p=1 trend=linear;
```

VARDEF=value

corrects for the degrees of freedom of the denominator for computing an error covariance matrix for the METHOD=LS option. If the METHOD=ML option is specified, the VARDEF=N option is always used. Valid values are as follows:

DF	specifies that the number of nonmissing observation minus the number of regressors be used.
N	specifies that the number of nonmissing observation be used.

```
model y1 y2 / p=1 vardef=n;
```

Printing Control Options

LAGMAX=number

specifies the maximum number of lags for which results are computed and displayed by the PRINT=(CORRX CORRY COVX COVY IARR IMPULSE= IMPULSX= PARCOEF PCANCORR PCORR) options. This option is also used to limit the printed results for the cross covariances and cross-correlations of residuals. The default is LAGMAX=min(12, $T-2$), where T is the number of nonmissing observations.

```
model y1 y2 / p=1 lagmax=6;
```

NOPRINT

suppresses all printed output.

```
model y1 y2 / p=1 noprint;
```

PRINTALL

requests all printing control options. The options set by the option PRINTALL are DFTEST=, MINIC=, PRINTFORM=BOTH, and PRINT=(CORRB CORRX CORRY COVB COVPE COVX COVY DECOMPOSE DYNAMIC IARR IMPULSE=(ALL) IMPULSX=(ALL) PARCOEF PCAN-CORR PCORR ROOTS YW).

You can also specify this option as the option ALL.

```
model y1 y2 / p=1 printall;
```

PRINTFORM=value

requests the printing format of the output generated by the PRINT= option and cross covariances and cross-correlations of residuals. Valid values are as follows:

BOTH	prints output in both MATRIX and UNIVARIATE forms.
MATRIX	prints output in matrix form. This is the default.
UNIVARIATE	prints output by variables.

```
model y1 y2 / p=1 print=(impulse) printform=univariate;
```

Printing Options**PRINT=(options)**

The following options can be used in the PRINT=() option. The options are listed within parentheses. If a number in parentheses follows an option listed below, then the option prints the number of lags specified by *number* in parentheses. The default is the number of lags specified by the LAG-MAX=*number* option.

CORRB

prints the estimated correlations of the parameter estimates.

CORRX**CORRX(number)**

prints the cross-correlation matrices of exogenous (independent) variables. The *number* should be greater than zero.

CORRY**CORRY(number)**

prints the cross-correlation matrices of dependent (endogenous) variables. The *number* should be greater than zero.

COVB

prints the estimated covariances of the parameter estimates.

COVPE

COVPE(*number*)

prints the covariance matrices of *number*-ahead prediction errors for the VARMAX(*p,q,s*) model. The *number* should be greater than zero. If the DIF= or DIFY= option is specified, the covariance matrices of multistep prediction errors are computed based on the differenced data. This option is not applicable when the PRIOR= option is specified. See the section “[Forecasting](#)” on page 2294 for details.

COVX**COVX(*number*)**

prints the cross-covariance matrices of exogenous (independent) variables. The *number* should be greater than zero.

COVY**COVY(*number*)**

prints the cross-covariance matrices of dependent (endogenous) variables. The *number* should be greater than zero.

DECOMPOSE**DECOMPOSE(*number*)**

prints the decomposition of the prediction error covariances using up to the number of lags specified by *number* in parentheses for the VARMA(*p,q*) model. The *number* should be greater than zero. It can be interpreted as the contribution of innovations in one variable to the mean squared error of the multistep forecast of another variable. The DECOMPOSE option also prints proportions of the forecast error variance.

If the DIF= or DIFY= option is specified, the covariance matrices of multistep prediction errors are computed based on the differenced data. This option is not applicable when the PRIOR= option is specified. See the section “[Forecasting](#)” on page 2294 for details.

DIAGNOSE

prints the residual diagnostics and model diagnostics.

DYNAMIC

prints the contemporaneous relationships among the components of the vector time series.

ESTIMATES

prints the coefficient estimates and a schematic representation of the significance and sign of the parameter estimates.

IARR**IARR(*number*)**

prints the infinite order AR representation of a VARMA process. The *number* should be greater than zero. If the ECM= option and the COINTEG statement are specified, then the reparameterized AR coefficient matrices are printed.

IMPULSE**IMPULSE(*number*)**

IMPULSE=(SIMPLE ACCUM ORTH STDERR ALL)

IMPULSE(*number*)=(SIMPLE ACCUM ORTH STDERR ALL)

prints the impulse response function. The *number* should be greater than zero. It investigates the response of one variable to an impulse in another variable in a system that involves a number of other variables as well. It is an infinite order MA representation of a VARMA process. See the section “[Impulse Response Function](#)” on page 2283 for details.

The following options can be used in the IMPULSE=() option. The options are specified within parentheses.

ACCUM	prints the accumulated impulse response function.
ALL	is equivalent to specifying all of SIMPLE, ACCUM, ORTH, and STDERR.
ORTH	prints the orthogonalized impulse response function.
SIMPLE	prints the impulse response function. This is the default.
STDERR	prints the standard errors of the impulse response function, the accumulated impulse response function, or the orthogonalized impulse response function.

If the exogenous variables are used to fit the model, then the STDERR option is ignored.

IMPULSX**IMPULSX(*number*)****IMPULSX=(SIMPLE ACCUM ALL)****IMPULSX(*number*)=(SIMPLE ACCUM ALL)**

prints the impulse response function related to exogenous (independent) variables. The *number* should be greater than zero. See the section “[Impulse Response Function](#)” on page 2283 for details.

The following options can be used in the IMPULSX=() option. The options are specified within parentheses.

ACCUM	prints the accumulated impulse response matrices for the transfer function.
ALL	is equivalent to specifying both SIMPLE and ACCUM.
SIMPLE	prints the impulse response matrices for the transfer function. This is the default.

PARCOEF**PARCOEF**(*number*)

prints the partial autoregression coefficient matrices, Φ_{mm} up to the lag *number*. The *number* should be greater than zero. With a VAR process, this option is useful for the identification of the order since the Φ_{mm} have the property that they equal zero for $m > p$ under the hypothetical assumption of a VAR(*p*) model. See the section “[Tentative Order Selection](#)” on page 2299 for details.

PCANCORR**PCANCORR**(*number*)

prints the partial canonical correlations of the process at lag *m* and the test for testing $\Phi_m=0$ for $m > p$ up to the lag *number*. The *number* should be greater than zero. The lag *m* partial canonical correlations are the canonical correlations between \mathbf{y}_t and \mathbf{y}_{t-m} , after adjustment for the dependence of these variables on the intervening values $\mathbf{y}_{t-1}, \dots, \mathbf{y}_{t-m+1}$. See the section “[Tentative Order Selection](#)” on page 2299 for details.

PCORR**PCORR**(*number*)

prints the partial correlation matrices. The *number* should be greater than zero. With a VAR process, this option is useful for a tentative order selection by the same property as the partial autoregression coefficient matrices, as described in the PRINT=(PARCOEF) option. See the section “[Tentative Order Selection](#)” on page 2299 for details.

ROOTS

prints the eigenvalues of the $kp \times kp$ companion matrix associated with the AR characteristic function $\Phi(B)$, where *k* is the number of dependent (endogenous) variables, and $\Phi(B)$ is the finite order matrix polynomial in the backshift operator *B*, such that $B^i \mathbf{y}_t = \mathbf{y}_{t-i}$. These eigenvalues indicate the stationary condition of the process since the stationary condition on the roots of $|\Phi(B)| = 0$ in the VAR(*p*) model is equivalent to the condition in the corresponding VAR(1) representation that all eigenvalues of the companion matrix be less than one in absolute value. Similarly, you can use this option to check the invertibility of the MA process. In addition, when the GARCH statement is specified, this option prints the roots of the GARCH characteristic polynomials to check covariance stationarity for the GARCH process.

YW

prints Yule-Walker estimates of the preliminary autoregressive model for the dependent (endogenous) variables. The coefficient matrices are printed using the maximum order of the autoregressive process.

Some examples of the PRINT= option are as follows:

```
model y1 y2 / p=1 print=(covy(10) corry(10));
model y1 y2 / p=1 print=(parcoef pcancorr pcorr);
model y1 y2 / p=1 print=(impulse(8) decompose(6) covpe(6));
model y1 y2 / p=1 print=(dynamic roots yw);
```

Lag Specification Options

P=number

P=(number-list)

specifies the order of the vector autoregressive process. Subset models of vector autoregressive orders can be specified by listing the desired set of lags. For example, you can specify the P=(1,3,4) option. The P=3 option is equivalent to the P=(1,2,3) option. The default is P=0.

If P=0 and there are no exogenous (independent) variables, then the AR polynomial order is automatically determined by minimizing an information criterion. If P=0 and the PRIOR= or ECM= option or both are specified, then the AR polynomial order is determined automatically.

If the ECM= option is specified, then subset models of vector autoregressive orders are not allowed and the AR maximum order specified is used.

Examples illustrating the P= option follow:

```
model y1 y2 / p=3;
model y1 y2 / p=(1,3);
model y1 y2 / p=(1,3) prior;
```

Q=number

Q=(number-list)

specifies the order of the moving-average error process. Subset models of moving-average orders can be specified by listing the desired set of lags. For example, you can specify the Q=(1,5) option. The default is Q=0.

```
model y1 y2 / p=1 q=1;
model y1 y2 / q=(2);
```

XLAG=*number*

XLAG=(*number-list*)

specifies the lags of exogenous (independent) variables. Subset models of distributed lags can be specified by listing the desired set of lags. For example, XLAG=(2) selects only a lag 2 of the exogenous variables. The default is XLAG=0. To exclude the present values of exogenous variables from the model, the NOCURRENTX option must be used.

```
model y1 y2 = x1-x3 / xlag=2 nocurrentx;
model y1 y2 = x1-x3 / p=1 xlag=(2);
```

Tentative Order Selection Options

MINIC

MINIC=(**TYPE=***value* **P=***number* **Q=***number* **PERROR=***number*)

prints the information criterion for the appropriate AR and MA tentative order selection and for the diagnostic checks of the fitted model.

If the MINIC= option is not specified, all types of information criteria are printed for diagnostic checks of the fitted model.

The following options can be used in the MINIC=() option. The options are specified within parentheses.

P=*number*

P=(*p_{min}:p_{max}*)

specifies the range of AR orders to be considered in the tentative order selection. The default is P=(0:5). The P=3 option is equivalent to the P=(0:3) option.

PERROR=*number*

PERROR=(*p_{ε,min}:p_{ε,max}*)

specifies the range of AR orders for obtaining the error series. The default is PERROR=(*p_{max} : p_{max} + q_{max}*).

Q=*number*

Q=(*q_{min}:q_{max}*)

specifies the range of MA orders to be considered in the tentative order selection. The default is Q=(0:5).

TYPE=*value*

specifies the criterion for the model order selection. Valid criteria are as follows:

AIC	specifies the Akaike information criterion.
AICC	specifies the corrected Akaike information criterion. This is the default criterion.
FPE	specifies the final prediction error criterion.
HQC	specifies the Hanna-Quinn criterion.
SBC	specifies the Schwarz Bayesian criterion. You can also specify this value as TYPE=BIC.

```

model y1 y2 / minic;
model y1 y2 / minic=(type=aic p=5);

```

Cointegration Related Options

Two options are related to integrated time series; one is the DFTEST option to test for a unit root and the other is the COINTTEST option to test for cointegration.

DFTEST

DFTEST=(DLAG=number)

DFTEST=(DLAG=(number) ... (number))

prints the Dickey-Fuller unit root tests. The **DLAG=(number) ... (number)** option specifies the regular or seasonal unit root test. Supported values of *number* are in 1, 2, 4, 12. If the *number* is greater than one, a seasonal Dickey-Fuller test is performed. If the **TREND=** option is specified, the seasonal unit root test is not available. The default is **DLAG=1**.

For example, the **DFTEST=(DLAG=(1)(12))** option produces two tables: the Dickey-Fuller regular unit root test and the seasonal unit root test.

Some examples of the **DFTEST=** option follow:

```

model y1 y2 / p=2 dftest;
model y1 y2 / p=2 dftest=(dlag=4);
model y1 y2 / p=2 dftest=(dlag=(1) (12));
model y1 y2 / p=2 dftest cointtest;

```

COINTTEST

COINTTEST=(JOHANSEN <(=options)> SW <(=options)> SIGLEVEL=number)

The following *options* can be used with the **COINTTEST=()** option. The *options* are specified within parentheses.

JOHANSEN

JOHANSEN=(TYPE=value IORDER=number NORMALIZE=variable)

prints the cointegration rank test for multivariate time series based on Johansen's method. This test is provided when the number of dependent (endogenous) variables is less than or equal to 11. See the section "[Vector Error Correction Modeling](#)" on page 2325 for details.

The VARX(*p,s*) model can be written as the error correction model

$$\Delta \mathbf{y}_t = \Pi \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t$$

where Π , Φ_i^* , A , and Θ_i^* are coefficient parameters; D_t is a deterministic term such as a constant, a linear trend, or seasonal dummies.

The $I(1)$ model is defined by one reduced-rank condition. If the cointegration rank is $r < k$, then there exist $k \times r$ matrices $\boldsymbol{\alpha}$ and $\boldsymbol{\beta}$ of rank r such that $\Pi = \boldsymbol{\alpha}\boldsymbol{\beta}'$.

The $I(1)$ model is rewritten as the $I(2)$ model

$$\Delta^2 \mathbf{y}_t = \Pi \mathbf{y}_{t-1} - \Psi \Delta \mathbf{y}_{t-1} + \sum_{i=1}^{p-2} \Psi_i \Delta^2 \mathbf{y}_{t-i} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t$$

where $\Psi = I_k - \sum_{i=1}^{p-1} \Phi_i^*$ and $\Psi_i = -\sum_{j=i+1}^{p-1} \Phi_j^*$.

The $I(2)$ model is defined by two reduced-rank conditions. One is that $\Pi = \boldsymbol{\alpha} \boldsymbol{\beta}'$, where $\boldsymbol{\alpha}$ and $\boldsymbol{\beta}$ are $k \times r$ matrices of full-rank r . The other is that $\boldsymbol{\alpha}'_{\perp} \Psi \boldsymbol{\beta}_{\perp} = \boldsymbol{\xi} \boldsymbol{\eta}'$ where $\boldsymbol{\xi}$ and $\boldsymbol{\eta}$ are $(k-r) \times s$ matrices with $s \leq k-r$; $\boldsymbol{\alpha}_{\perp}$ and $\boldsymbol{\beta}_{\perp}$ are $k \times (k-r)$ matrices of full-rank $k-r$ such that $\boldsymbol{\alpha}' \boldsymbol{\alpha}_{\perp} = 0$ and $\boldsymbol{\beta}' \boldsymbol{\beta}_{\perp} = 0$.

The following options can be used in the JOHANSEN=() option. The options are specified within parentheses.

IORDER=*number* specifies the integrated order.

IORDER=1	prints the cointegration rank test for an integrated order 1 and prints the long-run parameter, $\boldsymbol{\beta}$, and the adjustment coefficient, $\boldsymbol{\alpha}$. This is the default. If the IORDER=1 option is specified, then the AR order should be greater than or equal to 1. When the P=0 option, the value of P is set to 1 for the Johansen test.
IORDER=2	prints the cointegration rank test for integrated orders 1 and 2. If the IORDER=2 option is specified, then the AR order should be greater than or equal to 2. If the P=1 option with the IORDER=2 option, then the value of IORDER is set to 1; if the P=0 option with the IORDER=2 option, then the value of P is set to 2.

NORMALIZE=*variable* specifies the dependent (endogenous) variable name whose cointegration vectors are to be normalized. If the normalized variable is different from that specified in the ECM= option or the COINTEG statement, then the value specified in the COINTEG statement is used.

TYPE=*value* specifies the type of cointegration rank test to be printed. Valid values are as follows:

MAX	prints the cointegration maximum eigenvalue test.
TRACE	prints the cointegration trace test. This is the default.

If the NOINT option is not specified, the procedure prints two different cointegration rank tests in the presence of the unrestricted and restricted deterministic terms (constant or linear trend) models. If the IORDER=2 option is specified, the procedure automatically determines that the TYPE=TRACE option.

Some examples that illustrate the COINTTEST= option follow:

```
model y1 y2 / p=2 cointtest=(johansen=(type=max normalize=y1));
model y1 y2 / p=2 cointtest=(johansen=(iorder=2 normalize=y1));
```

SIGLEVEL=*value*

sets the size of cointegration rank tests and common trends tests.

The SIGLEVEL=*value* can be set to 0.1, 0.05, or 0.01. The default is SIGLEVEL=0.05.

```
model y1 y2 / p=2 cointtest=(johansen siglevel=0.1);
model y1 y2 / p=2 cointtest=(sw siglevel=0.1);
```

SW**SW=(***TYPE=**value* *LAG=**number***)**

prints common trends tests for a multivariate time series based on the Stock-Watson method. This test is provided when the number of dependent (endogenous) variables is less than or equal to 6. See the section “[Common Trends](#)” on page 2322 for details.

The following options can be used in the SW=() option. The options are listed within parentheses.

LAG=*number* specifies the number of lags. The default is LAG=max(1,*p*) for the TYPE=FILTDIF or TYPE=FILTRES option, where *p* is the AR maximum order specified by the P= option; LAG= $T^{1/4}$ for the TYPE=KERNEL option, where *T* is the number of nonmissing observations. If the specified LAG=*number* exceeds the default, then it is replaced by the default.

TYPE=*value* specifies the type of common trends test to be printed. Valid values are as follows:

FILTDIF	prints the common trends test based on the filtering method applied to the differenced series. This is the default.
FILTRES	prints the common trends test based on the filtering method applied to the residual series.
KERNEL	prints the common trends test based on the kernel method.

```
model y1 y2 / p=2 cointtest=(sw);
model y1 y2 / p=2 cointtest=(sw=(type=kernel));
model y1 y2 / p=2 cointtest=(sw=(type=kernel lag=3));
```

Bayesian VARX Estimation Options**PRIOR****PRIOR=(***prior-options***)**

specifies the prior value of parameters for the BVARX(*p*, *s*) model. The BVARX model allows for a subset model specification. If the ECM= option is specified with the PRIOR option, the BVECMX(*p*, *s*) form is fitted. See the section “[Bayesian VAR and VARX Modeling](#)” on page 2311 for details.

The following options can be used with the PRIOR=(*prior-options*) option. The *prior-options* are listed within parentheses.

IVAR**IVAR=(***variables***)**

specifies an integrated BVAR(*p*) model. The *variables* should be specified in the MODEL statement

as dependent variables. If you use the IVAR option without *variables*, then it sets the overall prior mean of the first lag of each variable equal to one in its own equation and sets all other coefficients to zero. If *variables* are specified, it sets the prior mean of the first lag of the specified variables equal to one in its own equation and sets all other coefficients to zero. When the series $\mathbf{y}_t = (y_1, y_2)'$ follows a bivariate BVAR(2) process, the IVAR or IVAR=($y_1 \ y_2$) option is equivalent to specifying MEAN=(1 0 0 0 0 1 0 0).

If the PRIOR=(MEAN=) or ECM= option is specified, the IVAR= option is ignored.

LAMBDA=value

specifies the prior standard deviation of the AR coefficient parameter matrices. It should be a positive number. The default is LAMBDA=1. As the value of the LAMBDA= option is increased, the BVAR(p) model becomes closer to a VAR(p) model.

MEAN=(vector)

specifies the mean vector in the prior distribution for the AR coefficients. If the vector is not specified, the prior value is assumed to be a zero vector. See the section “[Bayesian VAR and VARX Modeling](#)” on page 2311 for details.

You can specify the mean vector by order of the equation. Let $(\delta, \Phi_1, \dots, \Phi_p)$ be the parameter sets to be estimated and $\Phi = (\Phi_1, \dots, \Phi_p)$ be the AR parameter sets. The mean vector is specified by row-wise from Φ ; that is, the MEAN=(vec(Φ')) option.

For the PRIOR=(mean) option in the BVAR(2),

$$\Phi = \begin{pmatrix} \phi_{1,11} & \phi_{1,12} & \phi_{2,11} & \phi_{2,12} \\ \phi_{1,21} & \phi_{1,22} & \phi_{2,21} & \phi_{2,22} \end{pmatrix} = \begin{pmatrix} 2 & 0.1 & 1 & 0 \\ 0.5 & 3 & 0 & -1 \end{pmatrix}$$

where $\phi_{l,ij}$ is an element of Φ , l is a lag, i is associated with the first dependent variable, and j is associated with the second dependent variable.

```
model y1 y2 / p=2 prior=(mean=(2 0.1 1 0 0.5 3 0 -1));
```

The deterministic terms and exogenous variables are considered to shrink toward zero; you must omit prior means of exogenous variables and deterministic terms such as a constant, seasonal dummies, or trends.

For a Bayesian error correction model estimated when both the ECM= and PRIOR= options are used, a mean vector for only lagged AR coefficients, Φ_i^* , in terms of regressors $\Delta \mathbf{y}_{t-i}$, for $i = 1, \dots, (p-1)$ is used in the VECM(p) representation. The diffused prior variance of α is used, since β is replaced by $\hat{\beta}$ estimated in a nonconstrained VECM(p) form.

$$\Delta \mathbf{y}_t = \alpha \mathbf{z}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + AD_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \epsilon_t$$

where $\mathbf{z}_t = \beta' \mathbf{y}_t$.

For example, in the case of a bivariate ($k = 2$) BVECM(2) form, the option

$$\text{MEAN} = (\phi_{1,11}^* \ \phi_{1,12}^* \ \phi_{1,21}^* \ \phi_{1,22}^*)$$

where $\phi_{1,ij}^*$ is the (i, j) th element of the matrix Φ_1^* .

NREP=number

determines the number of repetitions that are used to compute the measure of forecast accuracy. See the equation in the section “[Forecasting of BVAR Modeling](#)” on page 2312 for details. The default is $NREP=0.5T$, where T is the number of observations. If $NREP$ is above $0.5T$, it is decreased to $0.5T$; if $NREP$ is below the value of the $LEAD=$ option, it is increased to the value of the $LEAD=$ option.

THETA=value

specifies the prior standard deviation of the AR coefficient parameter matrices. The *value* is in the interval (0,1). The default is $THETA=0.1$. As the value of the $THETA=$ option approaches 1, the specified $BVAR(p)$ model approaches a $VAR(p)$ model.

Some examples of the $PRIOR=$ option follow:

```
model y1 y2 / p=2 prior;
model y1 y2 / p=2 prior=(theta=0.2 lambda=5);
model y1 y2 = x1 / p=2 prior=(theta=0.2 lambda=5);
model y1 y2 = x1 / p=2
    prior=(theta=0.2 lambda=5 mean=(2 0.1 1 0 0.5 3 0 -1));
```

See the section “[Bayesian VAR and VARX Modeling](#)” on page 2311 for details.

Vector Error Correction Model Options

ECM=(RANK=number NORMALIZE=variable ECTREND)

specifies a vector error correction model.

The following options can be used in the $ECM=()$ option. The options are specified within parentheses.

NORMALIZE=variable

specifies a single dependent variable name whose cointegrating vectors are normalized. If the variable name is different from that specified in the $COINTEG$ statement, then the value specified in the $COINTEG$ statement is used.

RANK=number

specifies the cointegration rank. This option is required in the $ECM=$ option. The value of the $RANK=$ option should be greater than zero and less than or equal to the number of dependent (endogenous) variables, k . If the rank is different from that specified in the $COINTEG$ statement, then the value specified in the $COINTEG$ statement is used.

ECTREND

specifies the restriction on the drift in the $VECM(p)$ form.

- There is no separate drift in the $VECM(p)$ form, but a constant enters only through the error correction term.

$$\Delta \mathbf{y}_t = \alpha(\beta', \beta_0)(\mathbf{y}'_{t-1}, 1)' + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \epsilon_t$$

An example of the $ECTREND$ option follows:


```
model y1 y2 / p=2 ecm=(rank=1 ectrend);
```

- There is a separate drift and no separate linear trend in the VECM(p) form, but a linear trend enters only through the error correction term.

$$\Delta \mathbf{y}_t = \boldsymbol{\alpha}(\boldsymbol{\beta}', \beta_1)(\mathbf{y}'_{t-1}, t)' + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \delta_0 + \boldsymbol{\epsilon}_t$$

An example of the ECTREND option with the TREND= option follows:

```
model y1 y2 / p=2 ecm=(rank=1 ectrend) trend=linear;
```

If the NSEASON option is specified, then the NSEASON option is ignored; if the NOINT option is specified, then the ECTREND option is ignored.

Some examples of the ECM= option follow:

```
model y1 y2 / p=2 ecm=(rank=1 normalized=y1);
model y1 y2 / p=2 ecm=(rank=1 ectrend) trend=linear;
```

See the section “[Vector Error Correction Modeling](#)” on page 2325 for details.

GARCH Statement

GARCH *options* ;

The GARCH statement specifies a GARCH-type multivariate conditional heteroscedasticity model.

The following options can be used in the GARCH statement.

FORM=*value*

specifies the representation for a GARCH model. Valid values are as follows:

BEKK specifies a BEKK representation. This is the default.

CCC specifies a constant conditional correlation representation.

OUTHT=*SAS-data-set*

writes the conditional covariance matrix to an output data set.

P=*number*

P=*(number-list)*

specifies the order of the process or the subset of GARCH terms to be fitted. For example, you can specify the P=(1,3) option. The P=3 option is equivalent to the P=(1,2,3) option. The default is P=0.

Q=*number*

Q=(number-list)

specifies the order of the process or the subset of ARCH terms to be fitted. This option is required in the GARCH statement. For example, you can specify the Q=(2) option. The Q=2 option is equivalent to the Q=(1,2) option.

For the VAR(1)–ARCH(1) model,

```
model y1 y2 / p=1;
garch q=1 form=bekk;
```

For the multivariate GARCH(1,1) model,

```
model y1 y2;
garch q=1 p=1 form=ccc;
```

Other multivariate GARCH-type models are

```
model y1 y2 = x1 / xlag=1;
garch q=1;
```

```
model y1 y2 / q=1;
garch q=1 p=1;
```

See the section “[Multivariate GARCH Modeling](#)” on page 2344 for details.

NLOPTIONS Statement

NLOPTIONS *options* ;

The VARMAX procedure uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks. For a list of all the options of the NLOPTIONS statement, see Chapter 6, “[Nonlinear Optimization Methods](#).”

An example of the NLOPTIONS statement follows:

```
proc varmax data=one;
  nloptions tech=qn;
  model y1 y2 / p=2;
run;
```

The VARMAX procedure uses the dual quasi-Newton optimization method by default when no NLOPTIONS statement is specified. However, it uses Newton-Raphson ridge optimization when the NLOPTIONS statement is specified.

The following example uses the TECH=QUANEW by default.

```
proc varmax data=one;
  model y1 y2 / p=2 method=ml;
run;
```

The next example uses the TECH=NRRIDG by default.

```
proc varmax data=one;
  nloptions maxiter=500 maxfunc=5000;
  model y1 y2 / p=2 method=ml;
run;
```

OUTPUT Statement

OUTPUT <options> ;

The OUTPUT statement generates and prints forecasts based on the model estimated in the previous MODEL statement and, optionally, creates an output SAS data set that contains these forecasts.

When the GARCH model is estimated, the upper and lower confidence limits of forecasts are calculated by assuming that the error covariance has homoscedastic conditional covariance.

ALPHA=number

sets the forecast confidence limit size, where *number* is between 0 and 1. When you specify the ALPHA=*number* option, the upper and lower confidence limits define the $100(1 - \alpha)\%$ confidence interval. The default is ALPHA=0.05, which produces 95% confidence intervals.

BACK=number

specifies the number of observations before the end of the data at which the multistep forecasts begin. The BACK= option value must be less than or equal to the number of observations minus the number of lagged regressors in the model. The default is BACK=0, which means that the forecasts start at the end of the available data.

LEAD=number

specifies the number of multistep forecast values to compute. The default is LEAD=12.

NOPRINT

suppresses the printed forecast values of each dependent (endogenous) variable.

OUT=SAS-data-set

writes the forecast values to an output data set.

Some examples of the OUTPUT statements follow:

```
proc varmax data=one;
  model y1 y2 / p=2;
  output lead=6 back=2;
run;
```

```
proc varmax data=one;
  model y1 y2 / p=2;
  output out=for noprint;
run;
```

RESTRICT Statement

RESTRICT *restriction, ..., restriction ;*

The RESTRICT statement restricts the specified parameters to the specified values. Only one RESTRICT statement is allowed, but multiple restrictions can be specified in one RESTRICT statement.

The syntax for *restriction* is *parameter=value*, and each restriction is separated by commas. Parameters are referred by the following keywords:

- $\text{CONST}(i)$ is the intercept parameter of the i th time series y_{it}
- $\text{AR}(l, i, j)$ is the autoregressive parameter of the lag l value of the j th dependent (endogenous) variable, $y_{j,t-l}$, to the i th dependent variable at time t , y_{it}
- $\text{MA}(l, i, j)$ is the moving-average parameter of the lag l value of the j th error process, $\epsilon_{j,t-l}$, to the i th dependent variable at time t , y_{it}
- $\text{XL}(l, i, j)$ is the exogenous parameter of the lag l value of the j th exogenous (independent) variable, $x_{j,t-l}$, to the i th dependent variable at time t , y_{it}
- $\text{SDUMMY}(i, j)$ is the j th seasonal dummy of the i th time series at time t , y_{it} , where $j = 1, \dots, (nseason-1)$, where $nseason$ is based on the NSEASON= option in the MODEL statement
- $\text{LTREND}(i)$ is the linear trend parameter of the current value i th time series y_{it}
- $\text{QTREND}(i)$ is the quadratic trend parameter of the current value i th time series y_{it}

The following keywords are for the fitted GARCH model. The indexes i and j refer to the position of the element in the coefficient matrix.

- $\text{GCHC}(i, j)$ is the constant parameter of the covariance matrix, H_t , and (i, j) is $1 \leq i = j \leq k$ for CCC representation and $1 \leq i \leq j \leq k$ for BEKK representations, where k is the number of dependent variables
- $\text{ACH}(l, i, j)$ is the ARCH parameter of the lag l value of $\epsilon_t \epsilon_t'$, where $i, j = 1, \dots, k$ for BEKK representation and $i = j = 1, \dots, k$ for CCC representation
- $\text{GCH}(l, i, j)$ is the GARCH parameter of the lag l value of covariance matrix, H_t , where $i, j = 1, \dots, k$ for BEKK representation and $i = j = 1, \dots, k$ for CCC representation
- $\text{CCC}(i, j)$ is the constant conditional correlation parameter for only the CCC representation; (i, j) is $1 \leq i < j \leq k$

To use the RESTRICT statement, you need to know the form of the model. If the P=, Q=, and XLAG= options are not specified, then the RESTRICT statement is not applicable.

Restricted parameter estimates are computed by introducing a Lagrangian parameter for each restriction (Pringle and Rayner 1971). The Lagrangian parameter measures the sensitivity of the sum of square errors to the restriction. The estimates of these Lagrangian parameters and their significance are printed in the restriction results table.

The following are examples of the RESTRICT statement. The first example shows a bivariate ($k=2$) VAR(2) model,

```
proc varmax data=one;
  model y1 y2 / p=2;
  restrict AR(1,1,2)=0, AR(2,1,2)=0.3;
run;
```

The AR(1,1,2) and AR(2,1,2) parameters are fixed as AR(1,1,2)=0 and AR(2,1,2)=0.3, respectively, and other parameters are to be estimated.

The following shows a bivariate ($k=2$) VARX(1,1) model with three exogenous variables,

```
proc varmax data=two;
  model y1 = x1 x2, y2 = x2 x3 / p=1 xlag=1;
  restrict XL(0,1,1)=-1.2, XL(1,2,3)=0;
run;
```

The XL(0,1,1) and XL(1,2,3) parameters are fixed as XL(0,1,1)=-1.2 and XL(1,2,3)=0, respectively, and other parameters are to be estimated.

TEST Statement

TEST *restriction, ..., restriction* ;

The TEST statement performs the Wald test for the joint hypothesis specified in the statement. The syntax of *restriction* is *parameter=value*, and each restriction is separated by commas. The *restrictions* are specified in the same manner as in the RESTRICT statement. See the RESTRICT statement for description of model parameter naming conventions used by the RESTRICT and TEST statements. Any number of TEST statements can be specified.

To use the TEST statement, you need to know the form of the model. If the P=, Q=, and XLAG= options are not specified, then the TEST statement is not applicable.

See the section “[Granger Causality Test](#)” on page 2308 for the Wald test.

The following is an example of the TEST statement. In the case of a bivariate ($k=2$) VAR(2) model,

```
proc varmax data=one;
  model y1 y2 / p=2;
```

```
test AR(1,1,2)=0, AR(2,1,2)=0;
run;
```

After estimating the parameters, the TEST statement tests the null hypothesis that $AR(1,1,2)=0$ and $AR(2,1,2)=0$.

Details: VARMAX Procedure

Missing Values

The VARMAX procedure currently does not support missing values. The procedure uses the first contiguous group of observations with no missing values for any of the MODEL statement variables. Observations at the beginning of the data set with missing values for any MODEL statement variables are not used or included in the output data set. At the end of the data set, observations can have dependent (endogenous) variables with missing values and independent (exogenous) variables with nonmissing values.

VARMAX Model

The vector autoregressive moving-average model with exogenous variables is called the VARMAX(p,q,s) model. The form of the model can be written as

$$\mathbf{y}_t = \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t - \sum_{i=1}^q \Theta_i \boldsymbol{\epsilon}_{t-i}$$

where the output variables of interest, $\mathbf{y}_t = (y_{1t}, \dots, y_{kt})'$, can be influenced by other input variables, $\mathbf{x}_t = (x_{1t}, \dots, x_{rt})'$, which are determined outside of the system of interest. The variables \mathbf{y}_t are referred to as dependent, response, or endogenous variables, and the variables \mathbf{x}_t are referred to as independent, input, predictor, regressor, or exogenous variables. The unobserved noise variables, $\boldsymbol{\epsilon}_t = (\epsilon_{1t}, \dots, \epsilon_{kt})'$, are a vector white noise process.

The VARMAX(p,q,s) model can be written

$$\Phi(B)\mathbf{y}_t = \Theta^*(B)\mathbf{x}_t + \Theta(B)\boldsymbol{\epsilon}_t$$

where

$$\begin{aligned}\Phi(B) &= I_k - \Phi_1 B - \dots - \Phi_p B^p \\ \Theta^*(B) &= \Theta_0^* + \Theta_1^* B + \dots + \Theta_s^* B^s \\ \Theta(B) &= I_k - \Theta_1 B - \dots - \Theta_q B^q\end{aligned}$$

are matrix polynomials in B in the backshift operator, such that $B^i \mathbf{y}_t = \mathbf{y}_{t-i}$, the Φ_i and Θ_i are $k \times k$ matrices, and the Θ_i^* are $k \times r$ matrices.

The following assumptions are made:

- $E(\epsilon_t) = 0$, $E(\epsilon_t \epsilon_t') = \Sigma$, which is positive-definite, and $E(\epsilon_t \epsilon_s') = 0$ for $t \neq s$.
- For stationarity and invertibility of the VARMAX process, the roots of $|\Phi(z)| = 0$ and $|\Theta(z)| = 0$ are outside the unit circle.
- The exogenous (independent) variables \mathbf{x}_t are not correlated with residuals ϵ_t , $E(\mathbf{x}_t \epsilon_t') = 0$. The exogenous variables can be stochastic or nonstochastic. When the exogenous variables are stochastic and their future values are unknown, forecasts of these future values are needed to forecast the future values of the endogenous (dependent) variables. On occasion, future values of the exogenous variables can be assumed to be known because they are deterministic variables. The VARMAX procedure assumes that the exogenous variables are nonstochastic if future values are available in the input data set. Otherwise, the exogenous variables are assumed to be stochastic and their future values are forecasted by assuming that they follow the VARMA(p, q) model, prior to forecasting the endogenous variables, where p and q are the same as in the VARMAX(p, q, s) model.

State-Space Representation

Another representation of the VARMAX(p, q, s) model is in the form of a state-variable or a state-space model, which consists of a state equation

$$\mathbf{z}_t = F \mathbf{z}_{t-1} + K \mathbf{x}_t + G \epsilon_t$$

and an observation equation

$$\mathbf{y}_t = H \mathbf{z}_t$$

where

$$\mathbf{z}_t = \begin{bmatrix} \mathbf{y}_t \\ \vdots \\ \mathbf{y}_{t-p+1} \\ \mathbf{x}_t \\ \vdots \\ \mathbf{x}_{t-s+1} \\ \epsilon_t \\ \vdots \\ \epsilon_{t-q+1} \end{bmatrix}, \quad K = \begin{bmatrix} \Theta_0^* \\ 0_{k \times r} \\ \vdots \\ 0_{k \times r} \\ I_r \\ 0_{r \times r} \\ \vdots \\ 0_{r \times r} \\ 0_{k \times r} \\ \vdots \\ 0_{k \times r} \end{bmatrix}, \quad G = \begin{bmatrix} I_k \\ 0_{k \times k} \\ \vdots \\ 0_{k \times k} \\ 0_{r \times k} \\ \vdots \\ 0_{r \times k} \\ I_{k \times k} \\ 0_{k \times k} \\ \vdots \\ 0_{k \times k} \end{bmatrix}$$

$$F = \begin{bmatrix} \Phi_1 & \cdots & \Phi_{p-1} & \Phi_p & \Theta_1^* & \cdots & \Theta_{s-1}^* & \Theta_s^* & -\Theta_1 & \cdots & -\Theta_{q-1} & -\Theta_q \\ I_k & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \cdots & I_k & 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 \\ 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 \\ 0 & \cdots & 0 & 0 & I_r & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \cdots & 0 & 0 & 0 & \cdots & I_r & 0 & 0 & \cdots & 0 & 0 \\ 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 \\ 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 & I_k & \cdots & 0 & 0 \\ \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots & \vdots \\ 0 & \cdots & 0 & 0 & 0 & \cdots & 0 & 0 & 0 & \cdots & I_k & 0 \end{bmatrix}$$

and

$$H = [I_k, 0_{k \times k}, \dots, 0_{k \times k}, 0_{k \times r}, \dots, 0_{k \times r}, 0_{k \times k}, \dots, 0_{k \times k}]$$

On the other hand, it is assumed that \mathbf{x}_t follows a VARMA(p, q) model

$$\mathbf{x}_t = \sum_{i=1}^p A_i \mathbf{x}_{t-i} + \mathbf{a}_t - \sum_{i=1}^q C_i \mathbf{a}_{t-i}$$

The model can also be expressed as

$$A(B)\mathbf{x}_t = C(B)\mathbf{a}_t$$

where $A(B) = I_r - A_1 B - \cdots - A_p B^p$ and $C(B) = I_r - C_1 B - \cdots - C_q B^q$ are matrix polynomials in B , and the A_i and C_i are $r \times r$ matrices. Without loss of generality, the AR and MA orders can be taken to be the same as the VARMAX(p, q, s) model, and \mathbf{a}_t and ϵ_t are independent white noise processes.

Under suitable conditions such as stationarity, \mathbf{x}_t is represented by an infinite order moving-average process

$$\mathbf{x}_t = A(B)^{-1} C(B) \mathbf{a}_t = \Psi^x(B) \mathbf{a}_t = \sum_{j=0}^{\infty} \Psi_j^x \mathbf{a}_{t-j}$$

where $\Psi^x(B) = A(B)^{-1} C(B) = \sum_{j=0}^{\infty} \Psi_j^x B^j$.

The optimal minimum mean squared error (minimum MSE) i -step-ahead forecast of \mathbf{x}_{t+i} is

$$\begin{aligned} \mathbf{x}_{t+i|t} &= \sum_{j=i}^{\infty} \Psi_j^x \mathbf{a}_{t+i-j} \\ \mathbf{x}_{t+i|t+1} &= \mathbf{x}_{t+i|t} + \Psi_{i-1}^x \mathbf{a}_{t+1} \end{aligned}$$

For $i > q$,

$$\mathbf{x}_{t+i|t} = \sum_{j=1}^p A_j \mathbf{x}_{t+i-j|t}$$

The VARMAX(p, q, s) model has an absolutely convergent representation as

$$\begin{aligned} \mathbf{y}_t &= \Phi(B)^{-1} \Theta^*(B) \mathbf{x}_t + \Phi(B)^{-1} \Theta(B) \boldsymbol{\epsilon}_t \\ &= \Psi^*(B) \Psi^x(B) \mathbf{a}_t + \Phi(B)^{-1} \Theta(B) \boldsymbol{\epsilon}_t \\ &= V(B) \mathbf{a}_t + \Psi(B) \boldsymbol{\epsilon}_t \end{aligned}$$

or

$$\mathbf{y}_t = \sum_{j=0}^{\infty} V_j \mathbf{a}_{t-j} + \sum_{j=0}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t-j}$$

where $\Psi(B) = \Phi(B)^{-1} \Theta(B) = \sum_{j=0}^{\infty} \Psi_j B^j$, $\Psi^*(B) = \Phi(B)^{-1} \Theta^*(B)$, and $V(B) = \Psi^*(B) \Psi^x(B) = \sum_{j=0}^{\infty} V_j B^j$.

The optimal (minimum MSE) i -step-ahead forecast of \mathbf{y}_{t+i} is

$$\begin{aligned} \mathbf{y}_{t+i|t} &= \sum_{j=i}^{\infty} V_j \mathbf{a}_{t+i-j} + \sum_{j=i}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t+i-j} \\ \mathbf{y}_{t+i|t+1} &= \mathbf{y}_{t+i|t} + V_{i-1} \mathbf{a}_{t+1} + \Psi_{i-1} \boldsymbol{\epsilon}_{t+1} \end{aligned}$$

for $i = 1, \dots, v$ with $v = \max(p, q + 1)$. For $i > q$,

$$\begin{aligned} \mathbf{y}_{t+i|t} &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+i-j|t} + \sum_{j=0}^s \Theta_j^* \mathbf{x}_{t+i-j|t} \\ &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+i-j|t} + \Theta_0^* \mathbf{x}_{t+i|t} + \sum_{j=1}^s \Theta_j^* \mathbf{x}_{t+i-j|t} \\ &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+i-j|t} + \Theta_0^* \sum_{j=1}^p A_j \mathbf{x}_{t+i-j|t} + \sum_{j=1}^s \Theta_j^* \mathbf{x}_{t+i-j|t} \\ &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+i-j|t} + \sum_{j=1}^u (\Theta_0^* A_j + \Theta_j^*) \mathbf{x}_{t+i-j|t} \end{aligned}$$

where $u = \max(p, s)$.

Define $\Pi_j = \Theta_0^* A_j + \Theta_j^*$. For $i = v > q$ with $v = \max(p, q + 1)$, you obtain

$$\begin{aligned} \mathbf{y}_{t+v|t} &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+v-j|t} + \sum_{j=1}^u \Pi_j \mathbf{x}_{t+v-j|t} \quad \text{for } u \leq v \\ \mathbf{y}_{t+v|t} &= \sum_{j=1}^p \Phi_j \mathbf{y}_{t+v-j|t} + \sum_{j=1}^r \Pi_j \mathbf{x}_{t+v-j|t} \quad \text{for } u > v \end{aligned}$$

From the preceding relations, a state equation is

$$\mathbf{z}_{t+1} = F\mathbf{z}_t + K\mathbf{x}_t^* + G\mathbf{e}_{t+1}$$

and an observation equation is

$$\mathbf{y}_t = H\mathbf{z}_t$$

where

$$\mathbf{z}_t = \begin{bmatrix} \mathbf{y}_t \\ \mathbf{y}_{t+1|t} \\ \vdots \\ \mathbf{y}_{t+v-1|t} \\ \mathbf{x}_t \\ \mathbf{x}_{t+1|t} \\ \vdots \\ \mathbf{x}_{t+v-1|t} \end{bmatrix}, \quad \mathbf{x}_t^* = \begin{bmatrix} \mathbf{x}_{t+v-u} \\ \mathbf{x}_{t+v-u+1} \\ \vdots \\ \mathbf{x}_{t-1} \end{bmatrix}, \quad \mathbf{e}_{t+1} = \begin{bmatrix} \mathbf{a}_{t+1} \\ \boldsymbol{\epsilon}_{t+1} \end{bmatrix}$$

$$F = \begin{bmatrix} 0 & I_k & 0 & \cdots & 0 & 0 & 0 & 0 & \cdots & 0 \\ 0 & 0 & I_k & \cdots & 0 & 0 & 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ \Phi_v & \Phi_{v-1} & \Phi_{v-2} & \cdots & \Phi_1 & \Pi_v & \Pi_{v-1} & \Pi_{v-2} & \cdots & \Pi_1 \\ 0 & 0 & 0 & \cdots & 0 & 0 & I_r & 0 & \cdots & 0 \\ 0 & 0 & 0 & \cdots & 0 & 0 & 0 & I_r & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & 0 & \cdots & 0 & A_v & A_{v-1} & A_{v-2} & \cdots & A_1 \end{bmatrix}$$

$$K = \begin{bmatrix} 0 & 0 & \cdots & 0 \\ 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ \Pi_u & \Pi_{u-1} & \cdots & \Pi_{v+1} \\ 0 & 0 & \cdots & 0 \\ \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & 0 \end{bmatrix}, \quad G = \begin{bmatrix} V_0 & I_k \\ V_1 & \Psi_1 \\ \vdots & \vdots \\ V_{v-1} & \Psi_{v-1} \\ I_r & 0_{r \times k} \\ \Psi_1^x & 0_{r \times k} \\ \vdots & \vdots \\ \Psi_{v-1}^x & 0_{r \times k} \end{bmatrix}$$

and

$$H = [I_k, 0_{k \times k}, \dots, 0_{k \times k}, 0_{k \times r}, \dots, 0_{k \times r}]$$

Note that the matrix K and the input vector \mathbf{x}_t^* are defined only when $u > v$.

Dynamic Simultaneous Equations Modeling

In the econometrics literature, the VARMAX(p, q, s) model is sometimes written in a form that is slightly different than the one shown in the previous section. This alternative form is referred to as a *dynamic simultaneous equations* model or a *dynamic structural equations* model.

Since $E(\epsilon_t \epsilon_t') = \Sigma$ is assumed to be positive-definite, there exists a lower triangular matrix A_0 with ones on the diagonals such that $A_0 \Sigma A_0' = \Sigma^d$, where Σ^d is a diagonal matrix with positive diagonal elements.

$$A_0 y_t = \sum_{i=1}^p A_i y_{t-i} + \sum_{i=0}^s C_i^* x_{t-i} + C_0 \epsilon_t - \sum_{i=1}^q C_i \epsilon_{t-i}$$

where $A_i = A_0 \Phi_i$, $C_i^* = A_0 \Theta_i^*$, $C_0 = A_0$, and $C_i = A_0 \Theta_i$.

As an alternative form,

$$A_0 y_t = \sum_{i=1}^p A_i y_{t-i} + \sum_{i=0}^s C_i^* x_{t-i} + a_t - \sum_{i=1}^q C_i a_{t-i}$$

where $A_i = A_0 \Phi_i$, $C_i^* = A_0 \Theta_i^*$, $C_i = A_0 \Theta_i A_0^{-1}$, and $a_t = C_0 \epsilon_t$ has a diagonal covariance matrix Σ^d . The PRINT=(DYNAMIC) option returns the parameter estimates that result from estimating the model in this form.

A dynamic simultaneous equations model involves a leading (lower triangular) coefficient matrix for y_t at lag 0 or a leading coefficient matrix for ϵ_t at lag 0. Such a representation of the VARMAX(p, q, s) model can be more useful in certain circumstances than the standard representation. From the linear combination of the dependent variables obtained by $A_0 y_t$, you can easily see the relationship between the dependent variables in the current time.

The following statements provide the dynamic simultaneous equations of the VAR(1) model.

```
proc iml;
  sig = {1.0 0.5, 0.5 1.25};
  phi = {1.2 -0.5, 0.6 0.3};
  /* simulate the vector time series */
  call varmasim(y, phi) sigma = sig n = 100 seed = 34657;
  cn = {'y1' 'y2'};
  create simull from y[colname=cn];
  append from y;
quit;

data simull;
  set simull;
  date = intnx('year', '01jan1900'd, _n_-1 );
  format date year4.;
run;

proc varmax data=simull;
  model y1 y2 / p=1 noint print=(dynamic);
run;
```

This is the same data set and model used in the section “[Getting Started: VARMAX Procedure](#)” on page 2222. You can compare the results of the VARMA model form and the dynamic simultaneous equations model form.

Figure 35.25 Dynamic Simultaneous Equations (DYNAMIC Option)

The VARMAX Procedure						
Covariances of Innovations						
Variable		y1	y2			
y1		1.28875	0.00000			
y2		0.00000	1.29578			
AR						
Lag	Variable	y1	y2			
0	y1	1.00000	0.00000			
	y2	-0.30845	1.00000			
1	y1	1.15977	-0.51058			
	y2	0.18861	0.54247			
Dynamic Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y1	AR1_1_1	1.15977	0.05508	21.06	0.0001	y1(t-1)
	AR1_1_2	-0.51058	0.07140	-7.15	0.0001	y2(t-1)
y2	AR0_2_1	0.30845				y1(t)
	AR1_2_1	0.18861	0.05779	3.26	0.0015	y1(t-1)
	AR1_2_2	0.54247	0.07491	7.24	0.0001	y2(t-1)

In Figure 35.4 in the section “Getting Started: VARMAX Procedure” on page 2222, the covariance of ϵ_t estimated from the VARMAX model form is

$$\Sigma_{\epsilon} = \begin{pmatrix} 1.28875 & 0.39751 \\ 0.39751 & 1.41839 \end{pmatrix}$$

Figure 35.25 shows the results from estimating the model as a dynamic simultaneous equations model. By the decomposition of Σ_{ϵ} , you get a diagonal matrix (Σ_a) and a lower triangular matrix (A_0) such as $\Sigma_a = A_0 \Sigma_{\epsilon} A_0'$ where

$$\Sigma_a = \begin{pmatrix} 1.28875 & 0 \\ 0 & 1.29578 \end{pmatrix} \text{ and } A_0 = \begin{pmatrix} 1 & 0 \\ -0.30845 & 1 \end{pmatrix}$$

The lower triangular matrix (A_0) is shown in the left side of the simultaneous equations model. The parameter estimates in equations system are shown in the right side of the two-equations system.

The simultaneous equations model is written as

$$\begin{pmatrix} 1 & 0 \\ -0.30845 & 1 \end{pmatrix} \mathbf{y}_t = \begin{pmatrix} 1.15977 & -0.51058 \\ 0.18861 & 0.54247 \end{pmatrix} \mathbf{y}_{t-1} + \mathbf{a}_t$$

The resulting two-equation system can be written as

$$\begin{aligned} y_{1t} &= 1.15977y_{1,t-1} - 0.51058y_{2,t-1} + a_{1t} \\ y_{2t} &= 0.30845y_{1t} + 0.18861y_{1,t-1} + 0.54247y_{2,t-1} + a_{2t} \end{aligned}$$

Impulse Response Function

Simple Impulse Response Function (IMPULSE=SIMPLE Option)

The VARMAX(p, q, s) model has a convergent representation

$$\mathbf{y}_t = \Psi^*(B)\mathbf{x}_t + \Psi(B)\boldsymbol{\epsilon}_t$$

where $\Psi^*(B) = \Phi(B)^{-1}\Theta^*(B) = \sum_{j=0}^{\infty} \Psi_j^* B^j$ and $\Psi(B) = \Phi(B)^{-1}\Theta(B) = \sum_{j=0}^{\infty} \Psi_j B^j$.

The elements of the matrices Ψ_j from the operator $\Psi(B)$, called the impulse response, can be interpreted as the impact that a shock in one variable has on another variable. Let $\psi_{j,in}$ be the in^{th} element of Ψ_j at lag j , where i is the index for the impulse variable, and n is the index for the response variable (impulse \rightarrow response). For instance, $\psi_{j,11}$ is an impulse response to $y_{1t} \rightarrow y_{1t}$, and $\psi_{j,12}$ is an impulse response to $y_{1t} \rightarrow y_{2t}$.

Accumulated Impulse Response Function (IMPULSE=ACCUM Option)

The accumulated impulse response function is the cumulative sum of the impulse response function, $\Psi_l^a = \sum_{j=0}^l \Psi_j$.

Orthogonalized Impulse Response Function (IMPULSE=ORTH Option)

The MA representation of a VARMA(p, q) model with a standardized white noise innovation process offers another way to interpret a VARMA(p, q) model. Since Σ is positive-definite, there is a lower triangular matrix P such that $\Sigma = PP'$. The alternate MA representation of a VARMA(p, q) model is written as

$$\mathbf{y}_t = \Psi^o(B)\mathbf{u}_t$$

where $\Psi^o(B) = \sum_{j=0}^{\infty} \Psi_j^o B^j$, $\Psi_j^o = \Psi_j P$, and $\mathbf{u}_t = P^{-1}\boldsymbol{\epsilon}_t$.

The elements of the matrices Ψ_j^o , called the *orthogonal impulse response*, can be interpreted as the effects of the components of the standardized shock process \mathbf{u}_t on the process \mathbf{y}_t at lag j .

Impulse Response of Transfer Function (IMPULSX=SIMPLE Option)

The coefficient matrix Ψ_j^* from the transfer function operator $\Psi^*(B)$ can be interpreted as the effects that changes in the exogenous variables \mathbf{x}_t have on the output variable \mathbf{y}_t at lag j ; it is called an impulse response matrix in the transfer function.

Impulse Response of Transfer Function (IMPULSX=ACCUM Option)

The accumulated impulse response in the transfer function is the cumulative sum of the impulse response in the transfer function, $\Psi_l^{*a} = \sum_{j=0}^l \Psi_j^*$.

The asymptotic distributions of the impulse functions can be seen in the section “[VAR and VARX Modeling](#)” on page 2305.

The following statements provide the impulse response and the accumulated impulse response in the transfer function for a VARX(1,0) model.

```
proc varmax data=grunfeld plot=impulse;
  model y1-y3 = x1 x2 / p=1 lagmax=5
          printform=univariate
          print=(impulsx=(all) estimates);
run;
```

In Figure 35.26, the variables x_1 and x_2 are impulses and the variables y_1 , y_2 , and y_3 are responses. You can read the table matching the pairs of *impulse* \rightarrow *response* such as $x_1 \rightarrow y_1$, $x_1 \rightarrow y_2$, $x_1 \rightarrow y_3$, $x_2 \rightarrow y_1$, $x_2 \rightarrow y_2$, and $x_2 \rightarrow y_3$. In the pair of $x_1 \rightarrow y_1$, you can see the long-run responses of y_1 to an impulse in x_1 (the values are 1.69281, 0.35399, 0.09090, and so on for lag 0, lag 1, lag 2, and so on, respectively).

Figure 35.26 Impulse Response in Transfer Function (IMPULSX= Option)

The VARMAX Procedure			
Simple Impulse Response of Transfer Function by Variable			
Variable Response\Impulse	Lag	x1	x2
y1	0	1.69281	-0.00859
	1	0.35399	0.01727
	2	0.09090	0.00714
	3	0.05136	0.00214
	4	0.04717	0.00072
	5	0.04620	0.00040
y2	0	-6.09850	2.57980
	1	-5.15484	0.45445
	2	-3.04168	0.04391
	3	-2.23797	-0.01376
	4	-1.98183	-0.01647
	5	-1.87415	-0.01453
y3	0	-0.02317	-0.01274
	1	1.57476	-0.01435
	2	1.80231	0.00398
	3	1.77024	0.01062
	4	1.70435	0.01197
	5	1.63913	0.01187

Figure 35.27 shows the responses of y_1 , y_2 , and y_3 to a forecast error impulse in x_1 .

Figure 35.27 Plot of Impulse Response in Transfer Function

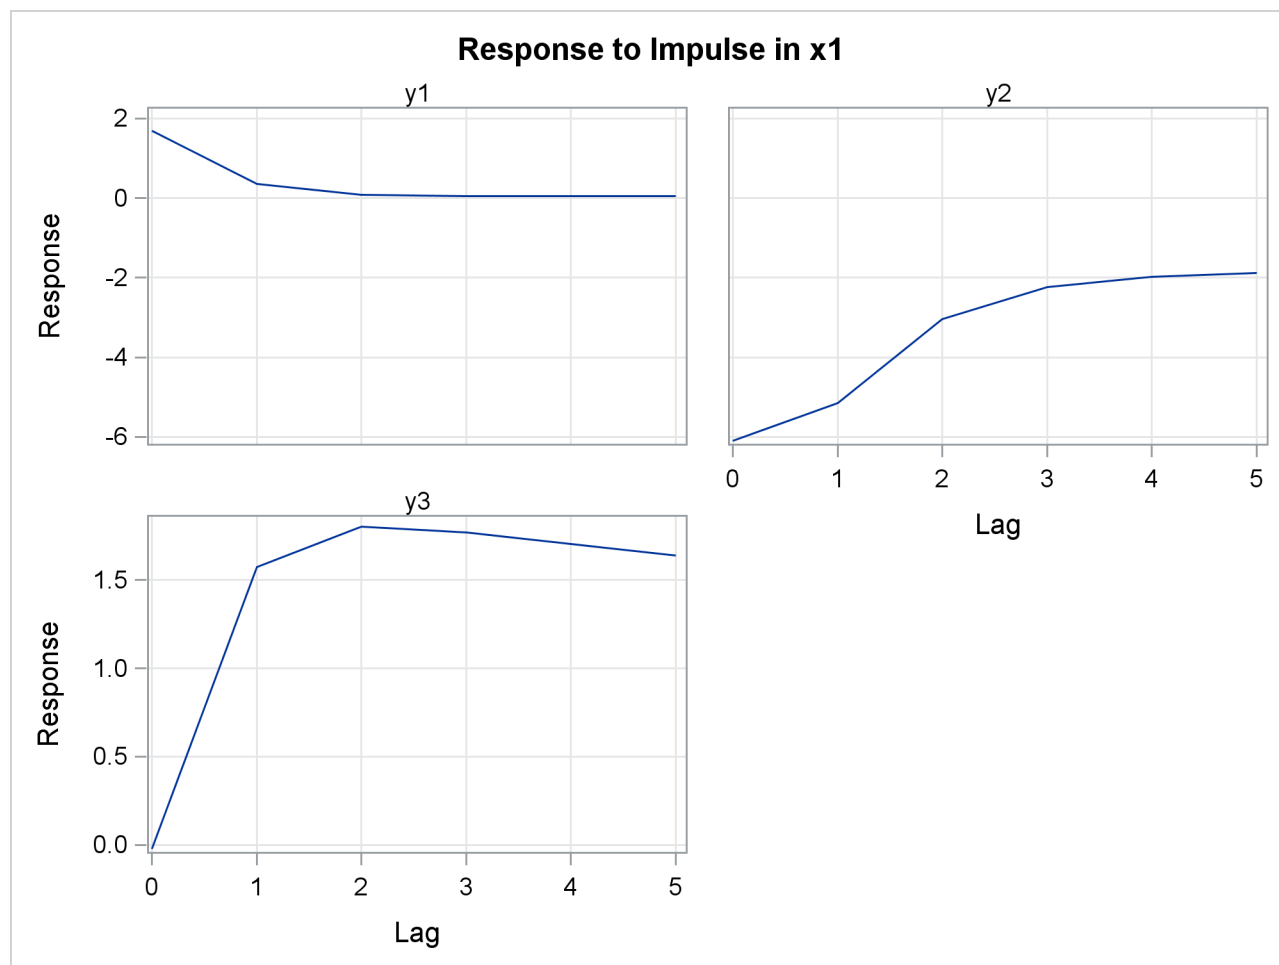


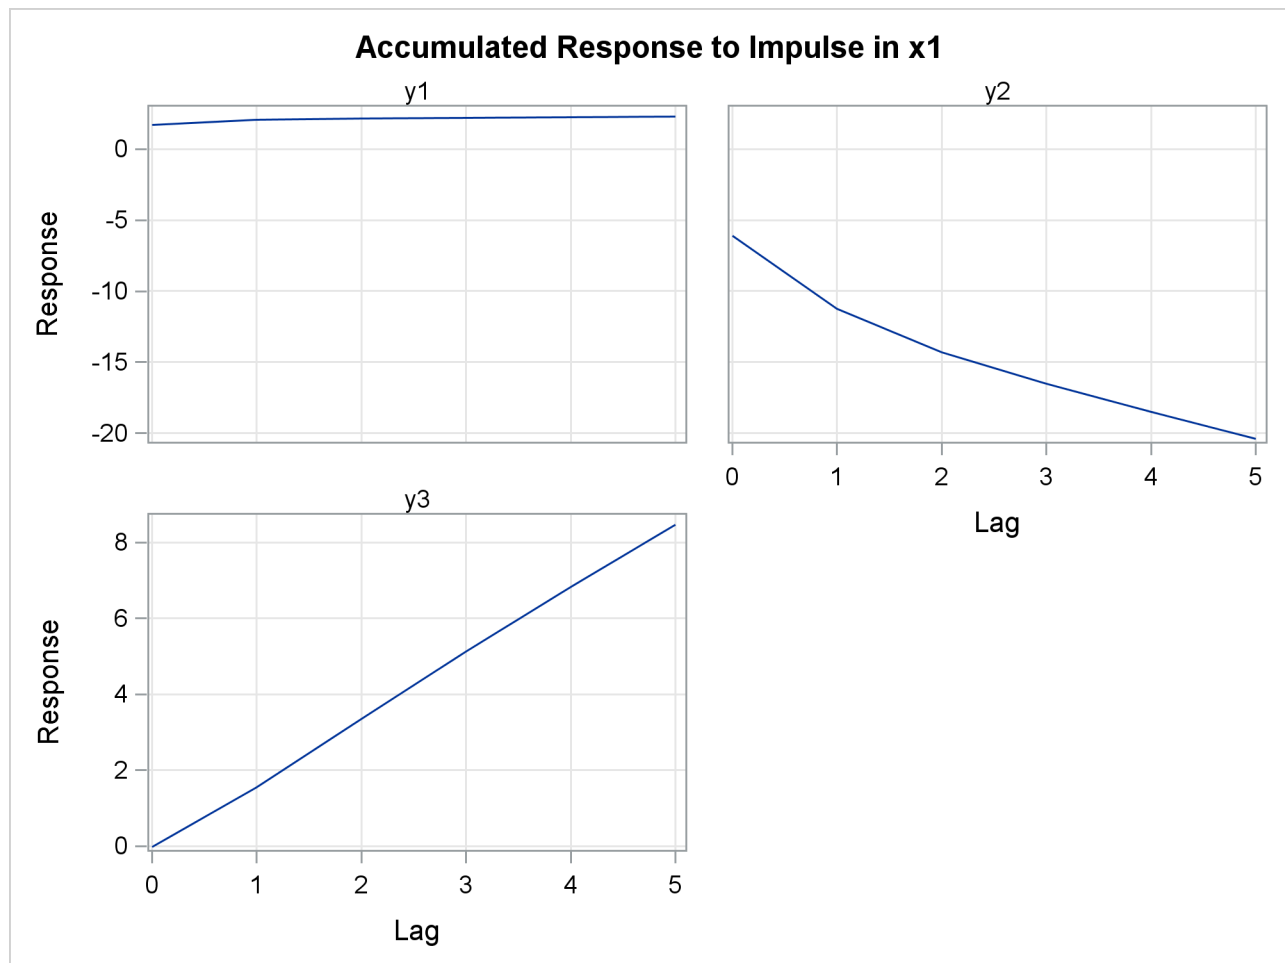
Figure 35.28 shows the accumulated impulse response in transfer function.

Figure 35.28 Accumulated Impulse Response in Transfer Function (IMPULSX= Option)

Accumulated Impulse Response of Transfer Function by Variable			
Variable Response\Impulse	Lag	x1	x2
y1	0	1.69281	-0.00859
	1	2.04680	0.00868
	2	2.13770	0.01582
	3	2.18906	0.01796
	4	2.23623	0.01867
	5	2.28243	0.01907
y2	0	-6.09850	2.57980
	1	-11.25334	3.03425
	2	-14.29502	3.07816
	3	-16.53299	3.06440
	4	-18.51482	3.04793
	5	-20.38897	3.03340
y3	0	-0.02317	-0.01274
	1	1.55159	-0.02709
	2	3.35390	-0.02311
	3	5.12414	-0.01249
	4	6.82848	-0.00052
	5	8.46762	0.01135

Figure 35.29 shows the accumulated responses of y_1 , y_2 , and y_3 to a forecast error impulse in x_1 .

Figure 35.29 Plot of Accumulated Impulse Response in Transfer Function



The following statements provide the impulse response function, the accumulated impulse response function, and the orthogonalized impulse response function with their standard errors for a VAR(1) model. Parts of the VARMAX procedure output are shown in Figure 35.30, Figure 35.32, and Figure 35.34.

```
proc varmax data=simul1 plot=impulse;
  model y1 y2 / p=1 noint lagmax=5
           print=(impulse=(all))
           printform=univariate;
run;
```

Figure 35.30 is the output in a univariate format associated with the PRINT=(IMPULSE=) option for the impulse response function. The keyword STD stands for the standard errors of the elements. The matrix in terms of the lag 0 does not print since it is the identity. In Figure 35.30, the variables y_1 and y_2 of the first row are impulses, and the variables y_1 and y_2 of the first column are responses. You can read the table matching the *impulse* \rightarrow *response* pairs, such as $y_1 \rightarrow y_1$, $y_1 \rightarrow y_2$, $y_2 \rightarrow y_1$, and $y_2 \rightarrow y_2$. For example, in the pair of $y_1 \rightarrow y_1$ at lag 3, the response is 0.8055. This represents the impact on y_1 of one-unit change in y_1 after 3 periods. As the lag gets higher, you can see the long-run responses of y_1 to an impulse in itself.

Figure 35.30 Impulse Response Function (IMPULSE= Option)

The VARMAX Procedure				
Simple Impulse Response by Variable				
Variable				
Response\Impulse	Lag	y1	y2	
y1	1	1.15977	-0.51058	
	STD	0.05508	0.05898	
	2	1.06612	-0.78872	
	STD	0.10450	0.10702	
	3	0.80555	-0.84798	
	STD	0.14522	0.14121	
	4	0.47097	-0.73776	
	STD	0.17191	0.15864	
	5	0.14315	-0.52450	
	STD	0.18214	0.16115	
y2	1	0.54634	0.38499	
	STD	0.05779	0.06188	
	2	0.84396	-0.13073	
	STD	0.08481	0.08556	
	3	0.90738	-0.48124	
	STD	0.10307	0.09865	
	4	0.78943	-0.64856	
	STD	0.12318	0.11661	
	5	0.56123	-0.65275	
	STD	0.14236	0.13482	

Figure 35.31 shows the responses of y_1 and y_2 to a forecast error impulse in y_1 with two standard errors.

Figure 35.31 Plot of Impulse Response

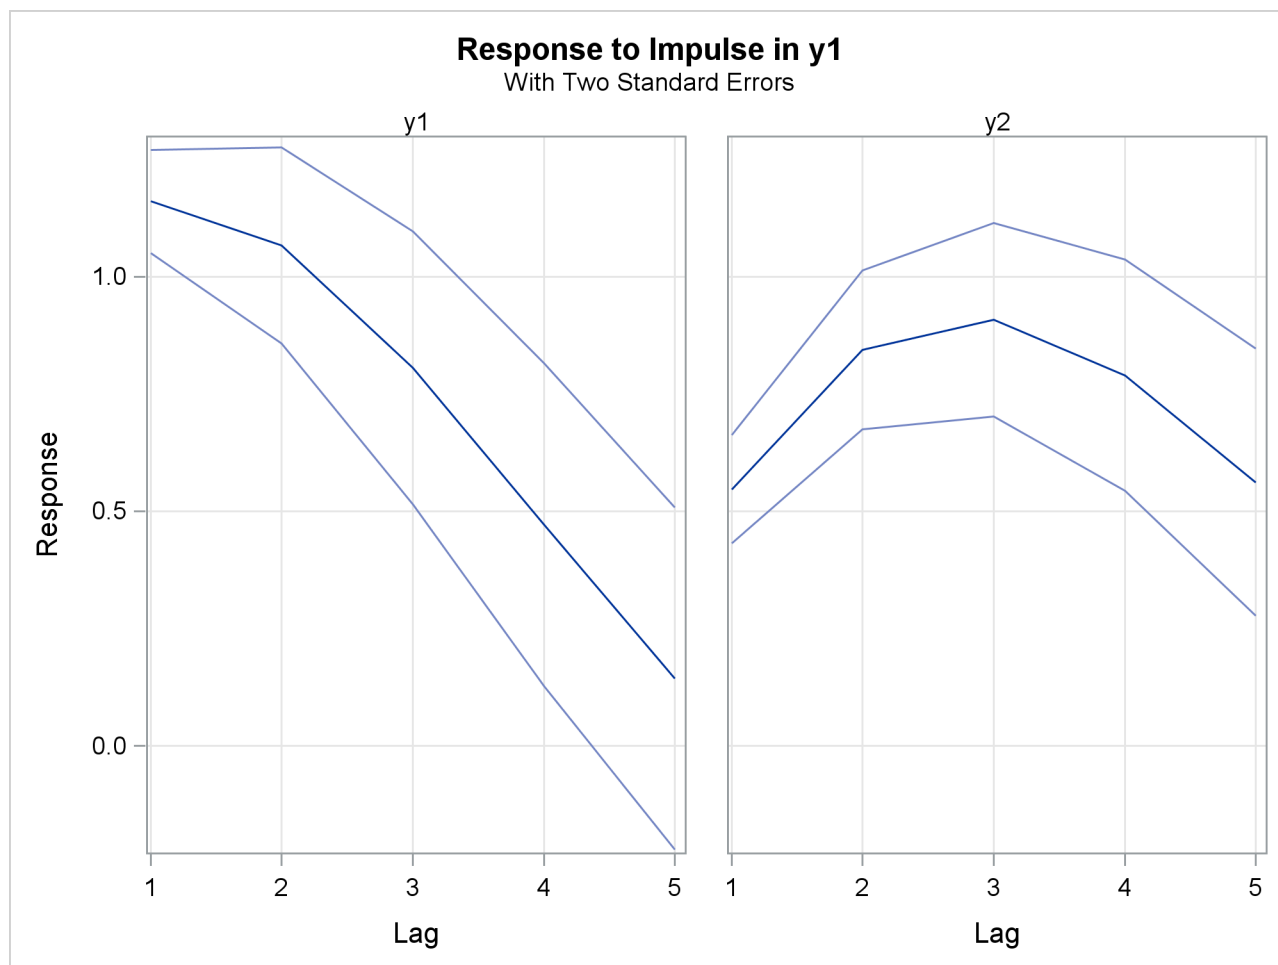


Figure 35.32 is the output in a univariate format associated with the PRINT=(IMPULSE=) option for the accumulated impulse response function. The matrix in terms of the lag 0 does not print since it is the identity.

Figure 35.32 Accumulated Impulse Response Function (IMPULSE= Option)

Accumulated Impulse Response by Variable			
Variable Response\Impulse	Lag	y1	y2
y1	1	2.15977	-0.51058
	STD	0.05508	0.05898
	2	3.22589	-1.29929
	STD	0.21684	0.22776
	3	4.03144	-2.14728
	STD	0.52217	0.53649
	4	4.50241	-2.88504
	STD	0.96922	0.97088
	5	4.64556	-3.40953
	STD	1.51137	1.47122
y2	1	0.54634	1.38499
	STD	0.05779	0.06188
	2	1.39030	1.25426
	STD	0.17614	0.18392
	3	2.29768	0.77302
	STD	0.36166	0.36874
	4	3.08711	0.12447
	STD	0.65129	0.65333
	5	3.64834	-0.52829
	STD	1.07510	1.06309

Figure 35.33 shows the accumulated responses of y_1 and y_2 to a forecast error impulse in y_1 with two standard errors.

Figure 35.33 Plot of Accumulated Impulse Response

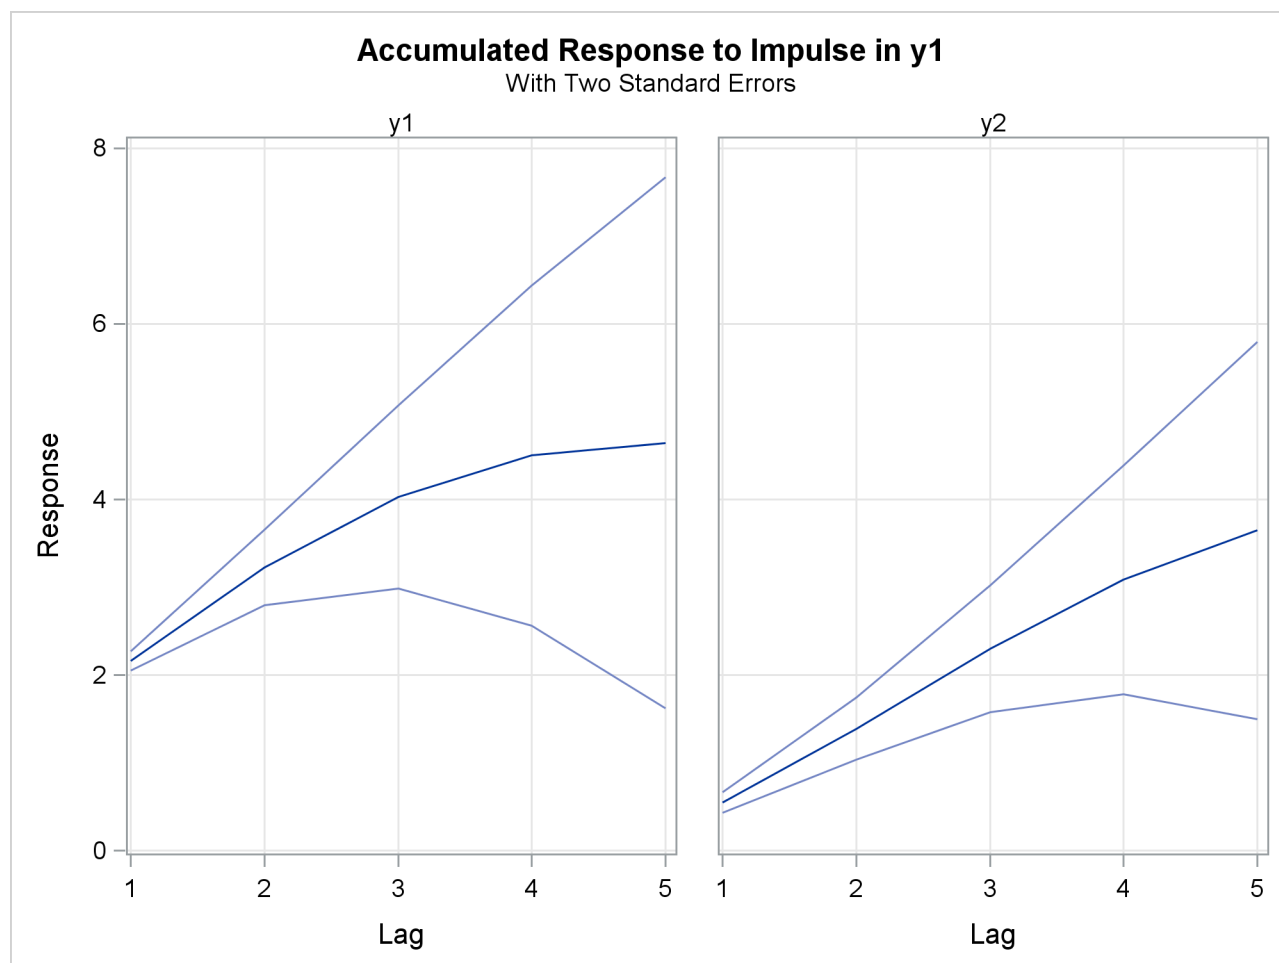


Figure 35.34 is the output in a univariate format associated with the PRINT=(IMPULSE=) option for the orthogonalized impulse response function. The two right-hand side columns, $y1$ and $y2$, represent the $y1_innovation$ and $y2_innovation$ variables. These are the impulses variables. The left-hand side column contains responses variables, $y1$ and $y2$. You can read the table by matching the *impulse* \rightarrow *response* pairs such as $y1_innovation \rightarrow y1$, $y1_innovation \rightarrow y2$, $y2_innovation \rightarrow y1$, and $y2_innovation \rightarrow y2$.

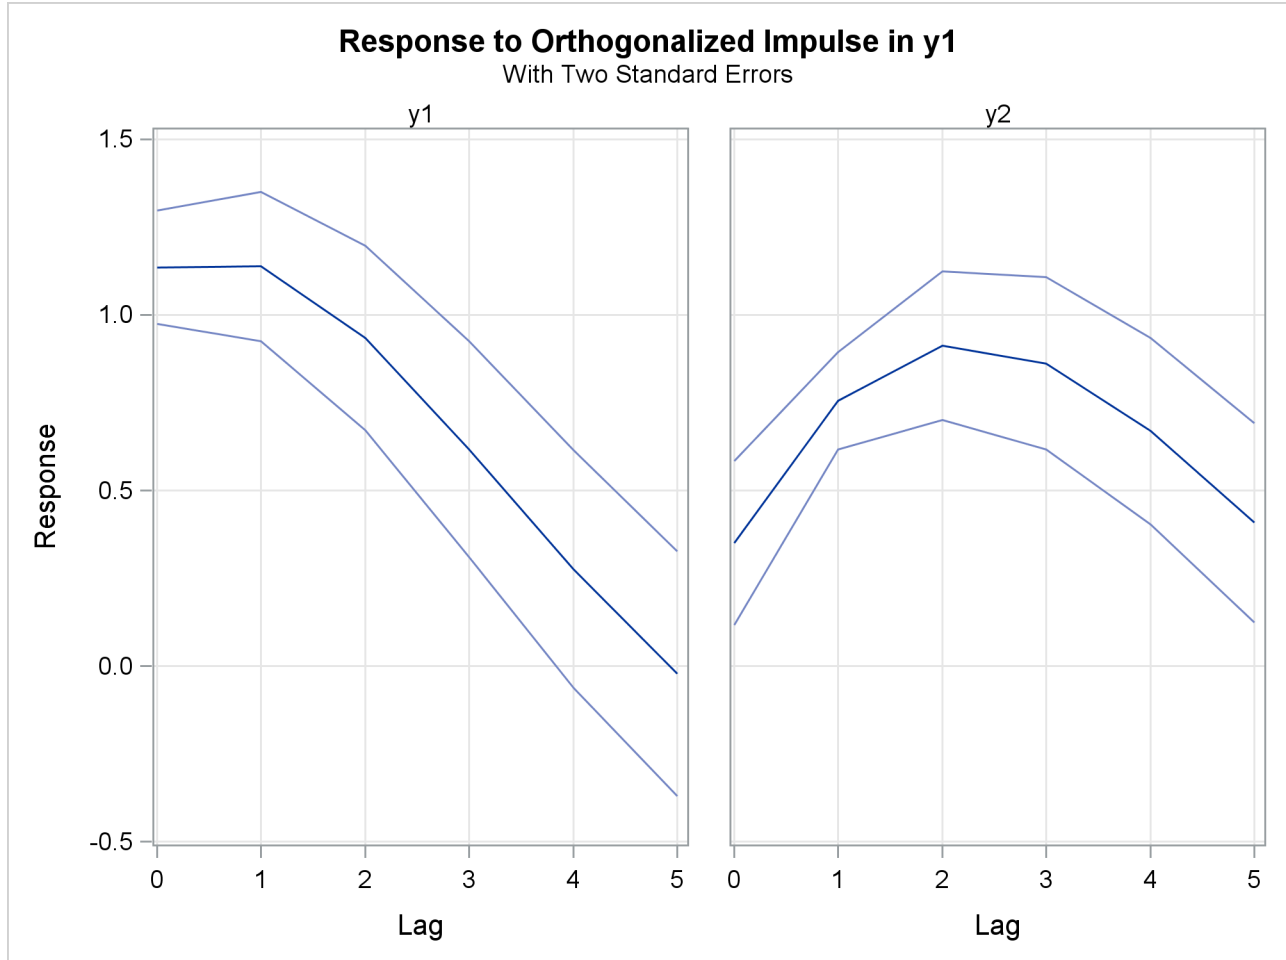
Figure 35.34 Orthogonalized Impulse Response Function (IMPULSE= Option)

Orthogonalized Impulse Response by Variable			
Variable Response\Impulse	Lag	y1	y2
y1	0	1.13523	0.00000
	STD	0.08068	0.00000
	1	1.13783	-0.58120
	STD	0.10666	0.14110
	2	0.93412	-0.89782
	STD	0.13113	0.16776
	3	0.61756	-0.96528
	STD	0.15348	0.18595
	4	0.27633	-0.83981
	STD	0.16940	0.19230
y2	5	-0.02115	-0.59705
	STD	0.17432	0.18830
	0	0.35016	1.13832
	STD	0.11676	0.08855
	1	0.75503	0.43824
	STD	0.06949	0.10937
	2	0.91231	-0.14881
	STD	0.10553	0.13565
	3	0.86158	-0.54780
	STD	0.12266	0.14825
	4	0.66909	-0.73827
	STD	0.13305	0.15846
	5	0.40856	-0.74304
	STD	0.14189	0.16765

In Figure 35.4, there is a positive correlation between ε_{1t} and ε_{2t} . Therefore, shock in $y1$ can be accompanied by a shock in $y2$ in the same period. For example, in the pair of $y1_innovation \rightarrow y2$, you can see the long-run responses of $y2$ to an impulse in $y1_innovation$.

Figure 35.35 shows the orthogonalized responses of y_1 and y_2 to a forecast error impulse in y_1 with two standard errors.

Figure 35.35 Plot of Orthogonalized Impulse Response



Forecasting

The optimal (minimum MSE) l -step-ahead forecast of \mathbf{y}_{t+l} is

$$\mathbf{y}_{t+l|t} = \sum_{j=1}^p \Phi_j \mathbf{y}_{t+l-j|t} + \sum_{j=0}^s \Theta_j^* \mathbf{x}_{t+l-j|t} - \sum_{j=l}^q \Theta_j \boldsymbol{\epsilon}_{t+l-j}, \quad l \leq q$$

$$\mathbf{y}_{t+l|t} = \sum_{j=1}^p \Phi_j \mathbf{y}_{t+l-j|t} + \sum_{j=0}^s \Theta_j^* \mathbf{x}_{t+l-j|t}, \quad l > q$$

with $\mathbf{y}_{t+l-j|t} = \mathbf{y}_{t+l-j}$ and $\mathbf{x}_{t+l-j|t} = \mathbf{x}_{t+l-j}$ for $l \leq j$. For the forecasts $\mathbf{x}_{t+l-j|t}$, see the section “State-Space Representation” on page 2277.

Covariance Matrices of Prediction Errors without Exogenous (Independent) Variables

Under the stationarity assumption, the optimal (minimum MSE) l -step-ahead forecast of \mathbf{y}_{t+l} has an infinite moving-average form, $\mathbf{y}_{t+l|t} = \sum_{j=l}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$. The prediction error of the optimal l -step-ahead forecast is $\mathbf{e}_{t+l|t} = \mathbf{y}_{t+l} - \mathbf{y}_{t+l|t} = \sum_{j=0}^{l-1} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$, with zero mean and covariance matrix,

$$\Sigma(l) = \text{Cov}(\mathbf{e}_{t+l|t}) = \sum_{j=0}^{l-1} \Psi_j \Sigma \Psi_j' = \sum_{j=0}^{l-1} \Psi_j^o \Psi_j^{o'}$$

where $\Psi_j^o = \Psi_j P$ with a lower triangular matrix P such that $\Sigma = PP'$. Under the assumption of normality of the $\boldsymbol{\epsilon}_t$, the l -step-ahead prediction error $\mathbf{e}_{t+l|t}$ is also normally distributed as multivariate $N(0, \Sigma(l))$. Hence, it follows that the diagonal elements $\sigma_{ii}^2(l)$ of $\Sigma(l)$ can be used, together with the point forecasts $y_{i,t+l|t}$, to construct l -step-ahead prediction intervals of the future values of the component series, $y_{i,t+l}$.

The following statements use the COVPE option to compute the covariance matrices of the prediction errors for a VAR(1) model. The parts of the VARMAX procedure output are shown in Figure 35.36 and Figure 35.37.

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint lagmax=5
    printform=both
    print=(decompose(5) impulse=(all) covpe(5));
run;
```

Figure 35.36 is the output in a matrix format associated with the COVPE option for the prediction error covariance matrices.

Figure 35.36 Covariances of Prediction Errors (COVPE Option)

The VARMAX Procedure			
Prediction Error Covariances			
Lead	Variable	y1	y2
1	y1	1.28875	0.39751
	y2	0.39751	1.41839
2	y1	2.92119	1.00189
	y2	1.00189	2.18051
3	y1	4.59984	1.98771
	y2	1.98771	3.03498
4	y1	5.91299	3.04856
	y2	3.04856	4.07738
5	y1	6.69463	3.85346
	y2	3.85346	5.07010

Figure 35.37 is the output in a univariate format associated with the COVPE option for the prediction error covariances. This printing format more easily explains the prediction error covariances of each variable.

Figure 35.37 Covariances of Prediction Errors

Prediction Error Covariances by Variable			
Variable	Lead	y1	y2
y1	1	1.28875	0.39751
	2	2.92119	1.00189
	3	4.59984	1.98771
	4	5.91299	3.04856
	5	6.69463	3.85346
y2	1	0.39751	1.41839
	2	1.00189	2.18051
	3	1.98771	3.03498
	4	3.04856	4.07738
	5	3.85346	5.07010

Covariance Matrices of Prediction Errors in the Presence of Exogenous (Independent) Variables

Exogenous variables can be both stochastic and nonstochastic (deterministic) variables. Considering the forecasts in the VARMAX(p, q, s) model, there are two cases.

When exogenous (independent) variables are stochastic (future values not specified):

As defined in the section “[State-Space Representation](#)” on page 2277, $\mathbf{y}_{t+l|t}$ has the representation

$$\mathbf{y}_{t+l|t} = \sum_{j=l}^{\infty} V_j \mathbf{a}_{t+l-j} + \sum_{j=l}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$$

and hence

$$\mathbf{e}_{t+l|t} = \sum_{j=0}^{l-1} V_j \mathbf{a}_{t+l-j} + \sum_{j=0}^{l-1} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$$

Therefore, the covariance matrix of the l -step-ahead prediction error is given as

$$\Sigma(l) = \text{Cov}(\mathbf{e}_{t+l|t}) = \sum_{j=0}^{l-1} V_j \Sigma_a V_j' + \sum_{j=0}^{l-1} \Psi_j \Sigma_{\epsilon} \Psi_j'$$

where Σ_a is the covariance of the white noise series \mathbf{a}_t , and \mathbf{a}_t is the white noise series for the VARMA(p, q) model of exogenous (independent) variables, which is assumed not to be correlated with $\boldsymbol{\epsilon}_t$ or its lags.

When future exogenous (independent) variables are specified:

The optimal forecast $\mathbf{y}_{t+l|t}$ of \mathbf{y}_t conditioned on the past information and also on known future values $\mathbf{x}_{t+1}, \dots, \mathbf{x}_{t+l}$ can be represented as

$$\mathbf{y}_{t+l|t} = \sum_{j=0}^{\infty} \Psi_j^* \mathbf{x}_{t+l-j} + \sum_{j=l}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$$

and the forecast error is

$$\mathbf{e}_{t+l|t} = \sum_{j=0}^{l-1} \Psi_j \boldsymbol{\epsilon}_{t+l-j}$$

Thus, the covariance matrix of the l -step-ahead prediction error is given as

$$\Sigma(l) = \text{Cov}(\mathbf{e}_{t+l|t}) = \sum_{j=0}^{l-1} \Psi_j \Sigma_{\epsilon} \Psi_j'$$

Decomposition of Prediction Error Covariances

In the relation $\Sigma(l) = \sum_{j=0}^{l-1} \Psi_j^o \Psi_j^{o'}$, the diagonal elements can be interpreted as providing a decomposition of the l -step-ahead prediction error covariance $\sigma_{ii}^2(l)$ for each component series y_{it} into contributions from the components of the standardized innovations $\boldsymbol{\epsilon}_t$.

If you denote the (i, n) th element of Ψ_j^o by $\psi_{j,in}$, the MSE of $y_{i,t+h|t}$ is

$$\text{MSE}(y_{i,t+h|t}) = E(y_{i,t+h} - y_{i,t+h|t})^2 = \sum_{j=0}^{l-1} \sum_{n=1}^k \psi_{j,in}^2$$

Note that $\sum_{j=0}^{l-1} \psi_{j,in}^2$ is interpreted as the contribution of innovations in variable n to the prediction error covariance of the l -step-ahead forecast of variable i .

The proportion, $\omega_{l,in}$, of the l -step-ahead forecast error covariance of variable i accounting for the innovations in variable n is

$$\omega_{l,in} = \sum_{j=0}^{l-1} \psi_{j,in}^2 / \text{MSE}(y_{i,t+h|t})$$

The following statements use the DECOMPOSE option to compute the decomposition of prediction error covariances and their proportions for a VAR(1) model:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint print=(decompose(15))
          printform=univariate;
run;
```

The proportions of decomposition of prediction error covariances of two variables are given in [Figure 35.38](#). The output explains that about 91.356% of the one-step-ahead prediction error covariances of the variable y_{2t} is accounted for by its own innovations and about 8.644% is accounted for by y_{1t} innovations.

Figure 35.38 Decomposition of Prediction Error Covariances (DECOMPOSE Option)

Proportions of Prediction Error Covariances by Variable			
Variable	Lead	y1	y2
y1	1	1.00000	0.00000
	2	0.88436	0.11564
	3	0.75132	0.24868
	4	0.64897	0.35103
	5	0.58460	0.41540
y2	1	0.08644	0.91356
	2	0.31767	0.68233
	3	0.50247	0.49753
	4	0.55607	0.44393
	5	0.53549	0.46451

Forecasting of the Centered Series

If the CENTER option is specified, the sample mean vector is added to the forecast.

Forecasting of the Differenced Series

If dependent (endogenous) variables are differenced, the final forecasts and their prediction error covariances are produced by integrating those of the differenced series. However, if the PRIOR option is specified, the forecasts and their prediction error variances of the differenced series are produced.

Let \mathbf{z}_t be the original series with some appended zero values that correspond to the unobserved past observations. Let $\Delta(B)$ be the $k \times k$ matrix polynomial in the backshift operator that corresponds to the differencing specified by the MODEL statement. The off-diagonal elements of Δ_i are zero, and the diagonal elements can be different. Then $\mathbf{y}_t = \Delta(B)\mathbf{z}_t$.

This gives the relationship

$$\mathbf{z}_t = \Delta^{-1}(B)\mathbf{y}_t = \sum_{j=0}^{\infty} \Lambda_j \mathbf{y}_{t-j}$$

where $\Delta^{-1}(B) = \sum_{j=0}^{\infty} \Lambda_j B^j$ and $\Lambda_0 = I_k$.

The l -step-ahead prediction of \mathbf{z}_{t+l} is

$$\mathbf{z}_{t+l|t} = \sum_{j=0}^{l-1} \Lambda_j \mathbf{y}_{t+l-j|t} + \sum_{j=l}^{\infty} \Lambda_j \mathbf{y}_{t+l-j}$$

The l -step-ahead prediction error of \mathbf{z}_{t+l} is

$$\sum_{j=0}^{l-1} \Lambda_j (\mathbf{y}_{t+l-j} - \mathbf{y}_{t+l-j|t}) = \sum_{j=0}^{l-1} \left(\sum_{u=0}^j \Lambda_u \Psi_{j-u} \right) \boldsymbol{\epsilon}_{t+l-j}$$

Letting $\Sigma_z(0) = 0$, the covariance matrix of the l -step-ahead prediction error of \mathbf{z}_{t+l} , $\Sigma_z(l)$, is

$$\begin{aligned}\Sigma_z(l) &= \sum_{j=0}^{l-1} \left(\sum_{u=0}^j \Lambda_u \Psi_{j-u} \right) \Sigma_\epsilon \left(\sum_{u=0}^j \Lambda_u \Psi_{j-u} \right)' \\ &= \Sigma_z(l-1) + \left(\sum_{j=0}^{l-1} \Lambda_j \Psi_{l-1-j} \right) \Sigma_\epsilon \left(\sum_{j=0}^{l-1} \Lambda_j \Psi_{l-1-j} \right)'\end{aligned}$$

If there are stochastic exogenous (independent) variables, the covariance matrix of the l -step-ahead prediction error of \mathbf{z}_{t+l} , $\Sigma_z(l)$, is

$$\begin{aligned}\Sigma_z(l) &= \Sigma_z(l-1) + \left(\sum_{j=0}^{l-1} \Lambda_j \Psi_{l-1-j} \right) \Sigma_\epsilon \left(\sum_{j=0}^{l-1} \Lambda_j \Psi_{l-1-j} \right)' \\ &\quad + \left(\sum_{j=0}^{l-1} \Lambda_j V_{l-1-j} \right) \Sigma_a \left(\sum_{j=0}^{l-1} \Lambda_j V_{l-1-j} \right)'\end{aligned}$$

Tentative Order Selection

Sample Cross-Covariance and Cross-Correlation Matrices

Given a stationary multivariate time series \mathbf{y}_t , cross-covariance matrices are

$$\Gamma(l) = E[(\mathbf{y}_t - \boldsymbol{\mu})(\mathbf{y}_{t+l} - \boldsymbol{\mu})']$$

where $\boldsymbol{\mu} = E(\mathbf{y}_t)$, and cross-correlation matrices are

$$\rho(l) = D^{-1} \Gamma(l) D^{-1}$$

where D is a diagonal matrix with the standard deviations of the components of \mathbf{y}_t on the diagonal.

The sample cross-covariance matrix at lag l , denoted as $C(l)$, is computed as

$$\hat{\Gamma}(l) = C(l) = \frac{1}{T} \sum_{t=1}^{T-l} \tilde{\mathbf{y}}_t \tilde{\mathbf{y}}_{t+l}'$$

where $\tilde{\mathbf{y}}_t$ is the centered data and T is the number of nonmissing observations. Thus, $\hat{\Gamma}(l)$ has (i, j) th element $\hat{\gamma}_{ij}(l) = c_{ij}(l)$. The sample cross-correlation matrix at lag l is computed as

$$\hat{\rho}_{ij}(l) = c_{ij}(l) / [c_{ii}(0)c_{jj}(0)]^{1/2}, \quad i, j = 1, \dots, k$$

The following statements use the CORRY option to compute the sample cross-correlation matrices and their summary indicator plots in terms of +, −, and ·, where + indicates significant positive cross-correlations, − indicates significant negative cross-correlations, and · indicates insignificant cross-correlations.

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint lagmax=3 print=(corry)
           printform=univariate;
run;
```

Figure 35.39 shows the sample cross-correlation matrices of y_{1t} and y_{2t} . As shown, the sample autocorrelation functions for each variable decay quickly, but are significant with respect to two standard errors.

Figure 35.39 Cross-Correlations (CORRY Option)

The VARMAX Procedure				
Cross Correlations of Dependent Series by Variable				
Variable	Lag	y1	y2	
y1	0	1.00000	0.67041	
	1	0.83143	0.84330	
	2	0.56094	0.81972	
	3	0.26629	0.66154	
y2	0	0.67041	1.00000	
	1	0.29707	0.77132	
	2	-0.00936	0.48658	
	3	-0.22058	0.22014	

Schematic Representation of Cross Correlations				
Variable/ Lag	0	1	2	3
y1	++	++	++	++
y2	++	++	.+	-+

+ is > 2*std error, - is <
-2*std error, . is between

Partial Autoregressive Matrices

For each $m = 1, 2, \dots, p$ you can define a sequence of matrices Φ_{mm} , which is called the partial autoregression matrices of lag m , as the solution for Φ_{mm} to the Yule-Walker equations of order m ,

$$\Gamma(l) = \sum_{i=1}^m \Gamma(l-i) \Phi'_{im}, \quad l = 1, 2, \dots, m$$

The sequence of the partial autoregression matrices Φ_{mm} of order m has the characteristic property that if the process follows the $AR(p)$, then $\Phi_{pp} = \Phi_p$ and $\Phi_{mm} = 0$ for $m > p$. Hence, the matrices Φ_{mm} have the cutoff property for a $VAR(p)$ model, and so they can be useful in the identification of the order of a pure VAR model.

The following statements use the PARCOEF option to compute the partial autoregression matrices:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint lagmax=3
    printform=univariate
    print=(corry parcoef pcorr
      pcancorr roots);
run;
```

Figure 35.40 shows that the model can be obtained by an AR order $m = 1$ since partial autoregression matrices are insignificant after lag 1 with respect to two standard errors. The matrix for lag 1 is the same as the Yule-Walker autoregressive matrix.

Figure 35.40 Partial Autoregression Matrices (PARCOEF Option)

The VARMAX Procedure				
Partial Autoregression				
Lag	Variable	y1	y2	
1	y1	1.14844	-0.50954	
	y2	0.54985	0.37409	
2	y1	-0.00724	0.05138	
	y2	0.02409	0.05909	
3	y1	-0.02578	0.03885	
	y2	-0.03720	0.10149	
Schematic Representation of Partial Autoregression				
Variable/ Lag				
		1	2	3
	y1	+-
	y2	++
+ is > 2*std error, - is < -2*std error, . is between				

Partial Correlation Matrices

Define the forward autoregression

$$y_t = \sum_{i=1}^{m-1} \Phi_{i,m-1} y_{t-i} + u_{m,t}$$

and the backward autoregression

$$\mathbf{y}_{t-m} = \sum_{i=1}^{m-1} \Phi_{i,m-1}^* \mathbf{y}_{t-m+i} + \mathbf{u}_{m,t-m}^*$$

The matrices $P(m)$ defined by Ansley and Newbold (1979) are given by

$$P(m) = \Sigma_{m-1}^{*1/2} \Phi_{mm}' \Sigma_{m-1}^{-1/2}$$

where

$$\Sigma_{m-1} = \text{Cov}(\mathbf{u}_{m,t}) = \Gamma(0) - \sum_{i=1}^{m-1} \Gamma(-i) \Phi_{i,m-1}'$$

and

$$\Sigma_{m-1}^* = \text{Cov}(\mathbf{u}_{m,t-m}^*) = \Gamma(0) - \sum_{i=1}^{m-1} \Gamma(m-i) \Phi_{m-i,m-1}^{*'}.$$

$P(m)$ are the partial cross-correlation matrices at lag m between the elements of \mathbf{y}_t and \mathbf{y}_{t-m} , given $\mathbf{y}_{t-1}, \dots, \mathbf{y}_{t-m+1}$. The matrices $P(m)$ have the cutoff property for a VAR(p) model, and so they can be useful in the identification of the order of a pure VAR structure.

The following statements use the PCORR option to compute the partial cross-correlation matrices:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint lagmax=3
           print=(pcorr)
           printform=univariate;
run;
```

The partial cross-correlation matrices in [Figure 35.41](#) are insignificant after lag 1 with respect to two standard errors. This indicates that an AR order of $m = 1$ can be an appropriate choice.

Figure 35.41 Partial Correlations (PCORR Option)

The VARMAX Procedure			
Partial Cross Correlations by Variable			
Variable	Lag	y1	y2
y1	1	0.80348	0.42672
	2	0.00276	0.03978
	3	-0.01091	0.00032
y2	1	-0.30946	0.71906
	2	0.04676	0.07045
	3	0.01993	0.10676

Schematic Representation of Partial Cross Correlations			
Variable/ Lag	1	2	3
y1	++
y2	-+

+ is > 2*std error, - is < -2*std error, . is between

Partial Canonical Correlation Matrices

The partial canonical correlations at lag m between the vectors \mathbf{y}_t and \mathbf{y}_{t-m} , given $\mathbf{y}_{t-1}, \dots, \mathbf{y}_{t-m+1}$, are $1 \geq \rho_1(m) \geq \rho_2(m) \cdots \geq \rho_k(m)$. The partial canonical correlations are the canonical correlations between the residual series $\mathbf{u}_{m,t}$ and $\mathbf{u}_{m,t-m}^*$, where $\mathbf{u}_{m,t}$ and $\mathbf{u}_{m,t-m}^*$ are defined in the previous section. Thus, the squared partial canonical correlations $\rho_i^2(m)$ are the eigenvalues of the matrix

$$\{\text{Cov}(\mathbf{u}_{m,t})\}^{-1} \text{E}(\mathbf{u}_{m,t} \mathbf{u}_{m,t-m}^{*'}) \{\text{Cov}(\mathbf{u}_{m,t-m}^*)\}^{-1} \text{E}(\mathbf{u}_{m,t-m}^* \mathbf{u}_{m,t}') = \Phi_{mm}^{*'} \Phi_{mm}'$$

It follows that the test statistic to test for $\Phi_m = 0$ in the VAR model of order $m > p$ is approximately

$$(T - m) \text{tr} \{\Phi_{mm}^{*'} \Phi_{mm}'\} \approx (T - m) \sum_{i=1}^k \rho_i^2(m)$$

and has an asymptotic chi-square distribution with k^2 degrees of freedom for $m > p$.

The following statements use the PCANCORR option to compute the partial canonical correlations:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint lagmax=3 print=(pcancorr);
run;
```

Figure 35.42 shows that the partial canonical correlations $\rho_i(m)$ between \mathbf{y}_t and \mathbf{y}_{t-m} are $\{0.918, 0.773\}$, $\{0.092, 0.018\}$, and $\{0.109, 0.011\}$ for lags $m = 1$ to 3. After lag $m = 1$, the partial canonical correlations are insignificant with respect to the 0.05 significance level, indicating that an AR order of $m = 1$ can be an appropriate choice.

Figure 35.42 Partial Canonical Correlations (PCANCORR Option)

The VARMAX Procedure					
Partial Canonical Correlations					
Lag	Correlation1	Correlation2	DF	Chi-Square	Pr > ChiSq
1	0.91783	0.77335	4	142.61	<.0001
2	0.09171	0.01816	4	0.86	0.9307
3	0.10861	0.01078	4	1.16	0.8854

The Minimum Information Criterion (MINIC) Method

The minimum information criterion (MINIC) method can tentatively identify the orders of a VARMA(p, q) process. Note that Spliid (1983), Koreisha and Pukkila (1989), and Quinn (1980) proposed this method. The first step of this method is to obtain estimates of the innovations series, ϵ_t , from the VAR(p_ϵ), where p_ϵ is chosen sufficiently large. The choice of the autoregressive order, p_ϵ , is determined by use of a selection criterion. From the selected VAR(p_ϵ) model, you obtain estimates of residual series

$$\tilde{\epsilon}_t = y_t - \sum_{i=1}^{p_\epsilon} \hat{\Phi}_i^{p_\epsilon} y_{t-i} - \hat{\delta}^{p_\epsilon}, \quad t = p_\epsilon + 1, \dots, T$$

In the second step, you select the order (p, q) of the VARMA model for p in ($p_{min} : p_{max}$) and q in ($q_{min} : q_{max}$)

$$y_t = \delta + \sum_{i=1}^p \Phi_i y_{t-i} - \sum_{i=1}^q \Theta_i \tilde{\epsilon}_{t-i} + \epsilon_t$$

which minimizes a selection criterion like SBC or HQ.

The following statements use the MINIC= option to compute a table that contains the information criterion associated with various AR and MA orders:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint minic=(p=3 q=3);
run;
```

Figure 35.43 shows the output associated with the MINIC= option. The criterion takes the smallest value at AR order 1.

Figure 35.43 MINIC= Option

The VARMAX Procedure				
Minimum Information Criterion Based on AICC				
Lag	MA 0	MA 1	MA 2	MA 3
AR 0	3.3574947	3.0331352	2.7080996	2.3049869
AR 1	0.5544431	0.6146887	0.6771732	0.7517968
AR 2	0.6369334	0.6729736	0.7610413	0.8481559
AR 3	0.7235629	0.7551756	0.8053765	0.8654079

VAR and VARX Modeling

The p th-order VAR process is written as

$$\mathbf{y}_t - \boldsymbol{\mu} = \sum_{i=1}^p \Phi_i (\mathbf{y}_{t-i} - \boldsymbol{\mu}) + \boldsymbol{\epsilon}_t \text{ or } \Phi(B)(\mathbf{y}_t - \boldsymbol{\mu}) = \boldsymbol{\epsilon}_t$$

with $\Phi(B) = I_k - \sum_{i=1}^p \Phi_i B^i$.

Equivalently, it can be written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \boldsymbol{\epsilon}_t \text{ or } \Phi(B)\mathbf{y}_t = \boldsymbol{\delta} + \boldsymbol{\epsilon}_t$$

with $\boldsymbol{\delta} = (I_k - \sum_{i=1}^p \Phi_i)\boldsymbol{\mu}$.

Stationarity

For stationarity, the VAR process must be expressible in the convergent causal infinite MA form as

$$\mathbf{y}_t = \boldsymbol{\mu} + \sum_{j=0}^{\infty} \Psi_j \boldsymbol{\epsilon}_{t-j}$$

where $\Psi(B) = \Phi(B)^{-1} = \sum_{j=0}^{\infty} \Psi_j B^j$ with $\sum_{j=0}^{\infty} \|\Psi_j\| < \infty$, where $\|A\|$ denotes a norm for the matrix A such as $\|A\|^2 = \text{tr}\{A'A\}$. The matrix Ψ_j can be recursively obtained from the relation $\Phi(B)\Psi(B) = I$; it is

$$\Psi_j = \Phi_1 \Psi_{j-1} + \Phi_2 \Psi_{j-2} + \cdots + \Phi_p \Psi_{j-p}$$

where $\Psi_0 = I_k$ and $\Psi_j = 0$ for $j < 0$.

The stationarity condition is satisfied if all roots of $|\Phi(z)| = 0$ are outside of the unit circle. The stationarity condition is equivalent to the condition in the corresponding VAR(1) representation, $\mathbf{Y}_t = \Phi \mathbf{Y}_{t-1} + \boldsymbol{\varepsilon}_t$, that all eigenvalues of the $kp \times kp$ companion matrix Φ be less than one in absolute value, where $\mathbf{Y}_t = (\mathbf{y}'_t, \dots, \mathbf{y}'_{t-p+1})'$, $\boldsymbol{\varepsilon}_t = (\boldsymbol{\varepsilon}'_t, 0', \dots, 0')'$, and

$$\Phi = \begin{bmatrix} \Phi_1 & \Phi_2 & \cdots & \Phi_{p-1} & \Phi_p \\ I_k & 0 & \cdots & 0 & 0 \\ 0 & I_k & \cdots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & I_k & 0 \end{bmatrix}$$

If the stationarity condition is not satisfied, a nonstationary model (a differenced model or an error correction model) might be more appropriate.

The following statements estimate a VAR(1) model and use the ROOTS option to compute the characteristic polynomial roots:

```
proc varmax data=simul1;
  model y1 y2 / p=1 noint print=(roots);
run;
```

Figure 35.44 shows the output associated with the ROOTS option, which indicates that the series is stationary since the modulus of the eigenvalue is less than one.

Figure 35.44 Stationarity (ROOTS Option)

The VARMAX Procedure					
Roots of AR Characteristic Polynomial					
Index	Real	Imaginary	Modulus	Radian	Degree
1	0.77238	0.35899	0.8517	0.4351	24.9284
2	0.77238	-0.35899	0.8517	-0.4351	-24.9284

Parameter Estimation

Consider the stationary VAR(p) model

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \boldsymbol{\varepsilon}_t$$

where $\mathbf{y}_{-p+1}, \dots, \mathbf{y}_0$ are assumed to be available (for convenience of notation). This can be represented by the general form of the multivariate linear model,

$$\mathbf{Y} = \mathbf{X}\mathbf{B} + \mathbf{E} \quad \text{or} \quad \mathbf{y} = (\mathbf{X} \otimes \mathbf{I}_k)\boldsymbol{\beta} + \mathbf{e}$$

where

$$\begin{aligned}
 Y &= (\mathbf{y}_1, \dots, \mathbf{y}_T)' \\
 B &= (\boldsymbol{\delta}, \Phi_1, \dots, \Phi_p)' \\
 X &= (X_0, \dots, X_{T-1})' \\
 X_t &= (1, \mathbf{y}_t', \dots, \mathbf{y}_{t-p+1}')' \\
 E &= (\boldsymbol{\epsilon}_1, \dots, \boldsymbol{\epsilon}_T)' \\
 \mathbf{y} &= \text{vec}(Y') \\
 \boldsymbol{\beta} &= \text{vec}(B') \\
 \mathbf{e} &= \text{vec}(E')
 \end{aligned}$$

with vec denoting the column stacking operator.

The conditional least squares estimator of $\boldsymbol{\beta}$ is

$$\hat{\boldsymbol{\beta}} = ((X'X)^{-1}X' \otimes I_k)\mathbf{y}$$

and the estimate of Σ is

$$\hat{\Sigma} = (T - (kp + 1))^{-1} \sum_{t=1}^T \hat{\boldsymbol{\epsilon}}_t \hat{\boldsymbol{\epsilon}}_t'$$

where $\hat{\boldsymbol{\epsilon}}_t$ is the residual vectors. Consistency and asymptotic normality of the LS estimator are that

$$\sqrt{T}(\hat{\boldsymbol{\beta}} - \boldsymbol{\beta}) \xrightarrow{d} N(0, \Gamma_p^{-1} \otimes \Sigma)$$

where $X'X/T$ converges in probability to Γ_p and \xrightarrow{d} denotes convergence in distribution.

The (conditional) maximum likelihood estimator in the VAR(p) model is equal to the (conditional) least squares estimator on the assumption of normality of the error vectors.

Asymptotic Distributions of Impulse Response Functions

As before, vec denotes the column stacking operator and vech is the corresponding operator that stacks the elements on and below the diagonal. For any $k \times k$ matrix A , the commutation matrix K_k is defined as $K_k \text{vec}(A) = \text{vec}(A')$; the duplication matrix D_k is defined as $D_k \text{vech}(A) = \text{vec}(A)$; the elimination matrix L_k is defined as $L_k \text{vec}(A) = \text{vech}(A)$.

The asymptotic distribution of the impulse response function (Lütkepohl 1993) is

$$\sqrt{T} \text{vec}(\hat{\Psi}_j - \Psi_j) \xrightarrow{d} N(0, G_j \Sigma_{\boldsymbol{\beta}} G_j') \quad j = 1, 2, \dots$$

where $\Sigma_{\boldsymbol{\beta}} = \Gamma_p^{-1} \otimes \Sigma$ and

$$G_j = \frac{\partial \text{vec}(\Psi_j)}{\partial \boldsymbol{\beta}'} = \sum_{i=0}^{j-1} \mathbf{J}(\Phi')^{j-1-i} \otimes \Psi_i$$

where $\mathbf{J} = [I_k, 0, \dots, 0]$ is a $k \times kp$ matrix and Φ is a $kp \times kp$ companion matrix.

The asymptotic distribution of the accumulated impulse response function is

$$\sqrt{T} \text{vec}(\hat{\Psi}_l^a - \Psi_l^a) \xrightarrow{d} N(0, F_l \Sigma_{\beta} F_l') \quad l = 1, 2, \dots$$

where $F_l = \sum_{j=1}^l G_j$.

The asymptotic distribution of the orthogonalized impulse response function is

$$\sqrt{T} \text{vec}(\hat{\Psi}_j^o - \Psi_j^o) \xrightarrow{d} N(0, C_j \Sigma_{\beta} C_j' + \bar{C}_j \Sigma_{\sigma} \bar{C}_j') \quad j = 0, 1, 2, \dots$$

where $C_0 = 0$, $C_j = (\Psi_0^{o'} \otimes I_k) G_j$, $\bar{C}_j = (I_k \otimes \Psi_j) H$,

$$H = \frac{\partial \text{vec}(\Psi_0^o)}{\partial \sigma'} = L_k' \{L_k(I_{k^2} + K_k)(\Psi_0^o \otimes I_k)L_k'\}^{-1}$$

and $\Sigma_{\sigma} = 2D_k^+(\Sigma \otimes \Sigma)D_k^{+'}$ with $D_k^+ = (D_k' D_k)^{-1} D_k'$ and $\sigma = \text{vech}(E)$.

Granger Causality Test

Let \mathbf{y}_t be arranged and partitioned in subgroups \mathbf{y}_{1t} and \mathbf{y}_{2t} with dimensions k_1 and k_2 , respectively ($k = k_1 + k_2$); that is, $\mathbf{y}_t = (\mathbf{y}_{1t}', \mathbf{y}_{2t}')'$ with the corresponding white noise process $\epsilon_t = (\epsilon_{1t}', \epsilon_{2t}')'$. Consider the VAR(p) model with partitioned coefficients $\Phi_{ij}(B)$ for $i, j = 1, 2$ as follows:

$$\begin{bmatrix} \Phi_{11}(B) & \Phi_{12}(B) \\ \Phi_{21}(B) & \Phi_{22}(B) \end{bmatrix} \begin{bmatrix} \mathbf{y}_{1t} \\ \mathbf{y}_{2t} \end{bmatrix} = \begin{bmatrix} \delta_1 \\ \delta_2 \end{bmatrix} + \begin{bmatrix} \epsilon_{1t} \\ \epsilon_{2t} \end{bmatrix}$$

The variables \mathbf{y}_{1t} are said to cause \mathbf{y}_{2t} , but \mathbf{y}_{2t} do not cause \mathbf{y}_{1t} if $\Phi_{12}(B) = 0$. The implication of this model structure is that future values of the process \mathbf{y}_{1t} are influenced only by its own past and not by the past of \mathbf{y}_{2t} , where future values of \mathbf{y}_{2t} are influenced by the past of both \mathbf{y}_{1t} and \mathbf{y}_{2t} . If the future \mathbf{y}_{1t} are not influenced by the past values of \mathbf{y}_{2t} , then it can be better to model \mathbf{y}_{1t} separately from \mathbf{y}_{2t} .

Consider testing $H_0: C\beta = c$, where C is a $s \times (k^2 p + k)$ matrix of rank s and c is an s -dimensional vector where $s = k_1 k_2 p$. Assuming that

$$\sqrt{T}(\hat{\beta} - \beta) \xrightarrow{d} N(0, \Gamma_p^{-1} \otimes \Sigma)$$

you get the Wald statistic

$$T(C\hat{\beta} - c)'[C(\hat{\Gamma}_p^{-1} \otimes \hat{\Sigma})C']^{-1}(C\hat{\beta} - c) \xrightarrow{d} \chi^2(s)$$

For the Granger causality test, the matrix C consists of zeros or ones and c is the zero vector. See Lütkepohl(1993) for more details of the Granger causality test.

VARX Modeling

The vector autoregressive model with exogenous variables is called the VARX(p,s) model. The form of the VARX(p,s) model can be written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t$$

The parameter estimates can be obtained by representing the general form of the multivariate linear model,

$$Y = XB + E \text{ or } \mathbf{y} = (X \otimes I_k) \boldsymbol{\beta} + \mathbf{e}$$

where

$$\begin{aligned} Y &= (\mathbf{y}_1, \dots, \mathbf{y}_T)' \\ B &= (\boldsymbol{\delta}, \Phi_1, \dots, \Phi_p, \Theta_0^*, \dots, \Theta_s^*)' \\ X &= (X_0, \dots, X_{T-1})' \\ X_t &= (1, \mathbf{y}_t', \dots, \mathbf{y}_{t-p+1}', \mathbf{x}_{t+1}', \dots, \mathbf{x}_{t-s+1}')' \\ E &= (\boldsymbol{\epsilon}_1, \dots, \boldsymbol{\epsilon}_T)' \\ \mathbf{y} &= \text{vec}(Y') \\ \boldsymbol{\beta} &= \text{vec}(B') \\ \mathbf{e} &= \text{vec}(E') \end{aligned}$$

The conditional least squares estimator of $\boldsymbol{\beta}$ can be obtained by using the same method in a VAR(p) modeling. If the multivariate linear model has different independent variables that correspond to dependent variables, the SUR (seemingly unrelated regression) method is used to improve the regression estimates.

The following example fits the ordinary regression model:

```
proc varmax data=one;
  model y1-y3 = x1-x5;
run;
```

This is equivalent to the REG procedure in the SAS/STAT software:

```
proc reg data=one;
  model y1 = x1-x5;
  model y2 = x1-x5;
  model y3 = x1-x5;
run;
```

The following example fits the second-order lagged regression model:

```
proc varmax data=two;
  model y1 y2 = x / xlag=2;
run;
```

This is equivalent to the REG procedure in the SAS/STAT software:

```
data three;
  set two;
  xlag1 = lag1(x);
  xlag2 = lag2(x);
run;

proc reg data=three;
  model y1 = x xlag1 xlag2;
  model y2 = x xlag1 xlag2;
run;
```

The following example fits the ordinary regression model with different regressors:

```
proc varmax data=one;
  model y1 = x1-x3, y2 = x2 x3;
run;
```

This is equivalent to the following SYSLIN procedure statements:

```
proc syslin data=one vardef=df sur;
  endogenous y1 y2;
  model y1 = x1-x3;
  model y2 = x2 x3;
run;
```

From the output in [Figure 35.20](#) in the section “Getting Started: VARMAX Procedure” on page 2222, you can see that the parameters, XL0_1_2, XL0_2_1, XL0_3_1, and XL0_3_2 associated with the exogenous variables, are not significant. The following example fits the VARX(1,0) model with different regressors:

```
proc varmax data=grunfeld;
  model y1 = x1, y2 = x2, y3 / p=1 print=(estimates);
run;
```

Figure 35.45 Parameter Estimates for the VARX(1, 0) Model

The VARMAX Procedure				
XLag				
Lag	Variable	x1	x2	
0	y1	1.83231	—	
	y2	—	2.42110	
	y3	—	—	

As you can see in [Figure 35.45](#), the symbol ‘—’ in the elements of matrix corresponds to endogenous variables that do not take the denoted exogenous variables.

Bayesian VAR and VARX Modeling

Consider the VAR(p) model

$$\mathbf{y}_t = \boldsymbol{\delta} + \Phi_1 \mathbf{y}_{t-1} + \cdots + \Phi_p \mathbf{y}_{t-p} + \boldsymbol{\epsilon}_t$$

or

$$\mathbf{y} = (X \otimes I_k) \boldsymbol{\beta} + \mathbf{e}$$

When the parameter vector $\boldsymbol{\beta}$ has a prior multivariate normal distribution with known mean $\boldsymbol{\beta}^*$ and covariance matrix V_β , the prior density is written as

$$f(\boldsymbol{\beta}) = \left(\frac{1}{2\pi}\right)^{k^2 p/2} |V_\beta|^{-1/2} \exp\left[-\frac{1}{2}(\boldsymbol{\beta} - \boldsymbol{\beta}^*)' V_\beta^{-1} (\boldsymbol{\beta} - \boldsymbol{\beta}^*)\right]$$

The likelihood function for the Gaussian process becomes

$$\begin{aligned} \ell(\boldsymbol{\beta}|\mathbf{y}) &= \left(\frac{1}{2\pi}\right)^{kT/2} |I_T \otimes \Sigma|^{-1/2} \times \\ &\quad \exp\left[-\frac{1}{2}(\mathbf{y} - (X \otimes I_k) \boldsymbol{\beta})' (I_T \otimes \Sigma^{-1}) (\mathbf{y} - (X \otimes I_k) \boldsymbol{\beta})\right] \end{aligned}$$

Therefore, the posterior density is derived as

$$f(\boldsymbol{\beta}|\mathbf{y}) \propto \exp\left[-\frac{1}{2}(\boldsymbol{\beta} - \bar{\boldsymbol{\beta}})' \bar{\Sigma}_\beta^{-1} (\boldsymbol{\beta} - \bar{\boldsymbol{\beta}})\right]$$

where the posterior mean is

$$\bar{\boldsymbol{\beta}} = [V_\beta^{-1} + (X'X \otimes \Sigma^{-1})]^{-1} [V_\beta^{-1} \boldsymbol{\beta}^* + (X' \otimes \Sigma^{-1}) \mathbf{y}]$$

and the posterior covariance matrix is

$$\bar{\Sigma}_\beta = [V_\beta^{-1} + (X'X \otimes \Sigma^{-1})]^{-1}$$

In practice, the prior mean $\boldsymbol{\beta}^*$ and the prior variance V_β need to be specified. If all the parameters are considered to shrink toward zero, the null prior mean should be specified. According to Litterman (1986), the prior variance can be given by

$$v_{ij}(l) = \begin{cases} (\lambda/l)^2 & \text{if } i = j \\ (\lambda \theta \sigma_{ii} / l \sigma_{jj})^2 & \text{if } i \neq j \end{cases}$$

where $v_{ij}(l)$ is the prior variance of the (i, j) th element of Φ_l , λ is the prior standard deviation of the diagonal elements of Φ_l , θ is a constant in the interval $(0, 1)$, and σ_{ii}^2 is the i th diagonal element of Σ . The deterministic terms have diffused prior variance. In practice, you replace the σ_{ii}^2 by the diagonal element of the ML estimator of Σ in the nonconstrained model.

For example, for a bivariate BVAR(2) model,

$$\begin{aligned} y_{1t} &= 0 + \phi_{1,11}y_{1,t-1} + \phi_{1,12}y_{2,t-1} + \phi_{2,11}y_{1,t-2} + \phi_{2,12}y_{2,t-2} + \epsilon_{1t} \\ y_{2t} &= 0 + \phi_{1,21}y_{1,t-1} + \phi_{1,22}y_{2,t-1} + \phi_{2,21}y_{1,t-2} + \phi_{2,22}y_{2,t-2} + \epsilon_{2t} \end{aligned}$$

with the prior covariance matrix

$$V_\beta = \text{Diag} \begin{pmatrix} \infty, \lambda^2, (\lambda\theta\sigma_1/\sigma_2)^2, (\lambda/2)^2, (\lambda\theta\sigma_1/2\sigma_2)^2, \\ \infty, (\lambda\theta\sigma_2/\sigma_1)^2, \lambda^2, (\lambda\theta\sigma_2/2\sigma_1)^2, (\lambda/2)^2 \end{pmatrix}$$

For the Bayesian estimation of integrated systems, the prior mean is set to the first lag of each variable equal to one in its own equation and all other coefficients at zero. For example, for a bivariate BVAR(2) model,

$$\begin{aligned} y_{1t} &= 0 + 1 y_{1,t-1} + 0 y_{2,t-1} + 0 y_{1,t-2} + 0 y_{2,t-2} + \epsilon_{1t} \\ y_{2t} &= 0 + 0 y_{1,t-1} + 1 y_{2,t-1} + 0 y_{1,t-2} + 0 y_{2,t-2} + \epsilon_{2t} \end{aligned}$$

Forecasting of BVAR Modeling

The mean squared error (MSE) is used to measure forecast accuracy (Litterman 1986). The MSE of the s -step-ahead forecast is

$$MSE_s = \frac{1}{J-s+1} \sum_{j=1}^{J-s+1} (A_{t_j} - F_{t_j}^s)^2$$

where J is the number specified by NREP= option, t_j is the time index of the observation to be forecasted in repetition j , A_{t_j} is the actual value at time t_j , and $F_{t_j}^s$ is the forecast made s periods earlier.

Bayesian VARX Modeling

The Bayesian vector autoregressive model with exogenous variables is called the BVARX(p, s) model. The form of the BVARX(p, s) model can be written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t$$

The parameter estimates can be obtained by representing the general form of the multivariate linear model,

$$\mathbf{y} = (\mathbf{X} \otimes \mathbf{I}_k) \boldsymbol{\beta} + \mathbf{e}$$

The prior means for the AR coefficients are the same as those specified in $BVAR(p)$. The prior means for the exogenous coefficients are set to zero.

Some examples of the Bayesian VARX model are as follows:

```
model y1 y2 = x1 / p=1 xlag=1 prior;
```

```
model y1 y2 = x1 / p=(1 3) xlag=1 nocurrentx
prior=(lambda=0.9 theta=0.1);
```

VARMA and VARMAX Modeling

A VARMA(p, q) process is written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \boldsymbol{\epsilon}_t - \sum_{i=1}^q \Theta_i \boldsymbol{\epsilon}_{t-i}$$

or

$$\Phi(B)\mathbf{y}_t = \boldsymbol{\delta} + \Theta(B)\boldsymbol{\epsilon}_t$$

where $\Phi(B) = I_k - \sum_{i=1}^p \Phi_i B^i$ and $\Theta(B) = I_k - \sum_{i=1}^q \Theta_i B^i$.

Stationarity and Invertibility

For stationarity and invertibility of the VARMA process, the roots of $|\Phi(z)| = 0$ and $|\Theta(z)| = 0$ are outside the unit circle.

Parameter Estimation

Under the assumption of normality of the $\boldsymbol{\epsilon}_t$ with mean vector zero and nonsingular covariance matrix Σ , consider the conditional (approximate) log-likelihood function of a VARMA(p, q) model with mean zero.

Define $Y = (\mathbf{y}_1, \dots, \mathbf{y}_T)'$ and $E = (\boldsymbol{\epsilon}_1, \dots, \boldsymbol{\epsilon}_T)'$ with $B^i Y = (\mathbf{y}_{1-i}, \dots, \mathbf{y}_{T-i})'$ and $B^i E = (\boldsymbol{\epsilon}_{1-i}, \dots, \boldsymbol{\epsilon}_{T-i})'$; define $\mathbf{y} = \text{vec}(Y')$ and $\mathbf{e} = \text{vec}(E')$. Then

$$\mathbf{y} - \sum_{i=1}^p (I_T \otimes \Phi_i) B^i \mathbf{y} = \mathbf{e} - \sum_{i=1}^q (I_T \otimes \Theta_i) B^i \mathbf{e}$$

where $B^i \mathbf{y} = \text{vec}[(B^i Y)']$ and $B^i \mathbf{e} = \text{vec}[(B^i E)']$.

Then, the conditional (approximate) log-likelihood function can be written as follows (Reinsel 1997):

$$\begin{aligned}\ell &= -\frac{T}{2} \log |\Sigma| - \frac{1}{2} \sum_{t=1}^T \epsilon_t' \Sigma^{-1} \epsilon_t \\ &= -\frac{T}{2} \log |\Sigma| - \frac{1}{2} \mathbf{w}' \Theta'^{-1} (I_T \otimes \Sigma^{-1}) \Theta^{-1} \mathbf{w}\end{aligned}$$

where $\mathbf{w} = \mathbf{y} - \sum_{i=1}^p (I_T \otimes \Phi_i) B^i \mathbf{y}$, and Θ is such that $\mathbf{e} - \sum_{i=1}^q (I_T \otimes \Theta_i) B^i \mathbf{e} = \Theta \mathbf{e}$.

For the exact log-likelihood function of a VARMA(p, q) model, the Kalman filtering method is used transforming the VARMA process into the state-space form (Reinsel 1997).

The state-space form of the VARMA(p, q) model consists of a state equation

$$\mathbf{z}_t = F \mathbf{z}_{t-1} + G \epsilon_t$$

and an observation equation

$$\mathbf{y}_t = H \mathbf{z}_t$$

where for $v = \max(p, q + 1)$

$$\begin{aligned}\mathbf{z}_t &= (\mathbf{y}_t', \mathbf{y}_{t+1|t}', \dots, \mathbf{y}_{t+v-1|t}')' \\ F &= \begin{bmatrix} 0 & I_k & 0 & \cdots & 0 \\ 0 & 0 & I_k & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \Phi_v & \Phi_{v-1} & \Phi_{v-2} & \cdots & \Phi_1 \end{bmatrix}, \quad G = \begin{bmatrix} I_k \\ \Psi_1 \\ \vdots \\ \Psi_{v-1} \end{bmatrix}\end{aligned}$$

and

$$H = [I_k, 0, \dots, 0]$$

The Kalman filtering approach is used for evaluation of the likelihood function. The updating equation is

$$\hat{\mathbf{z}}_{t|t} = \hat{\mathbf{z}}_{t|t-1} + K_t \epsilon_{t|t-1}$$

with

$$K_t = P_{t|t-1} H' [H P_{t|t-1} H']^{-1}$$

and the prediction equation is

$$\hat{\mathbf{z}}_{t|t-1} = F \hat{\mathbf{z}}_{t-1|t-1}, \quad P_{t|t-1} = F P_{t-1|t-1} F' + G \Sigma G'$$

with $P_{t|t} = [I - K_t H] P_{t|t-1}$ for $t = 1, 2, \dots, n$.

The log-likelihood function can be expressed as

$$\ell = -\frac{1}{2} \sum_{t=1}^T [\log |\Sigma_{t|t-1}| - (\mathbf{y}_t - \hat{\mathbf{y}}_{t|t-1})' \Sigma_{t|t-1}^{-1} (\mathbf{y}_t - \hat{\mathbf{y}}_{t|t-1})]$$

where $\hat{\mathbf{y}}_{t|t-1}$ and $\Sigma_{t|t-1}$ are determined recursively from the Kalman filter procedure. To construct the likelihood function from Kalman filtering, you obtain $\hat{\mathbf{y}}_{t|t-1} = H\hat{\mathbf{z}}_{t|t-1}$, $\hat{\boldsymbol{\epsilon}}_{t|t-1} = \mathbf{y}_t - \hat{\mathbf{y}}_{t|t-1}$, and $\Sigma_{t|t-1} = HP_{t|t-1}H'$.

Define the vector $\boldsymbol{\beta}$

$$\boldsymbol{\beta} = (\phi'_1, \dots, \phi'_p, \theta'_1, \dots, \theta'_q, \text{vech}(\Sigma))'$$

where $\phi_i = \text{vec}(\Phi_i)$ and $\theta_i = \text{vec}(\Theta_i)$.

The log-likelihood equations are solved by iterative numerical procedures such as the quasi-Newton optimization. The starting values for the AR and MA parameters are obtained from the least squares estimates.

Asymptotic Distribution of the Parameter Estimates

Under the assumptions of stationarity and invertibility for the VARMA model and the assumption that $\boldsymbol{\epsilon}_t$ is a white noise process, $\hat{\boldsymbol{\beta}}$ is a consistent estimator for $\boldsymbol{\beta}$ and $\sqrt{T}(\hat{\boldsymbol{\beta}} - \boldsymbol{\beta})$ converges in distribution to the multivariate normal $N(0, V^{-1})$ as $T \rightarrow \infty$, where V is the asymptotic information matrix of $\boldsymbol{\beta}$.

Asymptotic Distributions of Impulse Response Functions

Defining the vector $\boldsymbol{\beta}$

$$\boldsymbol{\beta} = (\phi'_1, \dots, \phi'_p, \theta'_1, \dots, \theta'_q)'$$

the asymptotic distribution of the impulse response function for a VARMA(p, q) model is

$$\sqrt{T} \text{vec}(\hat{\Psi}_j - \Psi_j) \xrightarrow{d} N(0, G_j \Sigma_{\boldsymbol{\beta}} G_j') \quad j = 1, 2, \dots$$

where $\Sigma_{\boldsymbol{\beta}}$ is the covariance matrix of the parameter estimates and

$$G_j = \frac{\partial \text{vec}(\Psi_j)}{\partial \boldsymbol{\beta}'} = \sum_{i=0}^{j-1} \mathbf{H}'(\mathbf{A}')^{j-1-i} \otimes \mathbf{J} \mathbf{A}^i \mathbf{J}'$$

where $\mathbf{H} = [I_k, 0, \dots, 0, I_k, 0, \dots, 0]'$ is a $k(p+q) \times k$ matrix with the second I_k following after p block matrices; $\mathbf{J} = [I_k, 0, \dots, 0]$ is a $k \times k(p+q)$ matrix; \mathbf{A} is a $k(p+q) \times k(p+q)$ matrix,

$$\mathbf{A} = \begin{bmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{bmatrix}$$

where

$$A_{11} = \begin{bmatrix} \Phi_1 & \Phi_2 & \cdots & \Phi_{p-1} & \Phi_p \\ I_k & 0 & \cdots & 0 & 0 \\ 0 & I_k & \cdots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & I_k & 0 \end{bmatrix} \quad A_{12} = \begin{bmatrix} -\Theta_1 & \cdots & -\Theta_{q-1} & -\Theta_q \\ 0 & \cdots & 0 & 0 \\ 0 & \cdots & 0 & 0 \\ \vdots & \ddots & \vdots & \vdots \\ 0 & \cdots & 0 & 0 \end{bmatrix}$$

A_{21} is a $kq \times kp$ zero matrix, and

$$A_{22} = \begin{bmatrix} 0 & 0 & \cdots & 0 & 0 \\ I_k & 0 & \cdots & 0 & 0 \\ 0 & I_k & \cdots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \cdots & I_k & 0 \end{bmatrix}$$

An Example of a VARMA(1,1) Model

Consider a VARMA(1,1) model with mean zero

$$\mathbf{y}_t = \Phi_1 \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t - \Theta_1 \boldsymbol{\epsilon}_{t-1}$$

where $\boldsymbol{\epsilon}_t$ is the white noise process with a mean zero vector and the positive-definite covariance matrix Σ .

The following IML procedure statements simulate a bivariate vector time series from this model to provide test data for the VARMAX procedure:

```
proc iml;
  sig = {1.0 0.5, 0.5 1.25};
  phi = {1.2 -0.5, 0.6 0.3};
  theta = {0.5 -0.2, 0.1 0.3};
  /* to simulate the vector time series */
  call varmasim(y,phi,theta) sigma=sig n=100 seed=34657;
  cn = {'y1' 'y2'};
  create simul3 from y[colname=cn];
  append from y;
run;
```

The following statements fit a VARMA(1,1) model to the simulated data. You specify the order of the autoregressive model with the P= option and the order of moving-average model with the Q= option. You specify the quasi-Newton optimization in the NLOPTIONS statement as an optimization method.

```
proc varmax data=simul3;
  nloptions tech=qn;
  model y1 y2 / p=1 q=1 noint print=(estimates);
run;
```

Figure 35.46 shows the initial values of parameters. The initial values were estimated using the least squares method.

Figure 35.46 Start Parameter Estimates for the VARMA(1, 1) Model

The VARMAX Procedure		
Optimization Start Parameter Estimates		
N Parameter	Estimate	Gradient Objective Function
1 AR1_1_1	1.013118	-0.987110
2 AR1_2_1	0.510233	0.163904
3 AR1_1_2	-0.399051	0.826824
4 AR1_2_2	0.441344	-9.605845
5 MA1_1_1	0.295872	-1.929771
6 MA1_2_1	-0.002809	2.408518
7 MA1_1_2	-0.044216	-0.632995
8 MA1_2_2	0.425334	0.888222

Figure 35.47 shows the default option settings for the quasi-Newton optimization technique.

Figure 35.47 Default Criteria for the quasi-Newton Optimization

Minimum Iterations	0
Maximum Iterations	200
Maximum Function Calls	2000
ABSGCONV Gradient Criterion	0.00001
GCONV Gradient Criterion	1E-8
ABSFCONV Function Criterion	0
FCONV Function Criterion	2.220446E-16
FCONV2 Function Criterion	0
FSIZE Parameter	0
ABSXCONV Parameter Change Criterion	0
XCONV Parameter Change Criterion	0
XSIZE Parameter	0
ABSCONV Function Criterion	-1.34078E154
Line Search Method	2
Starting Alpha for Line Search	1
Line Search Precision LSPRECISION	0.4
DAMPSTEP Parameter for Line Search	.
Singularity Tolerance (SINGULAR)	1E-8

Figure 35.48 shows the iteration history of parameter estimates.

Figure 35.48 Iteration History of Parameter Estimates

Iter	Rest arts	Func Calls	Act Con	Objective Function	Obj Fun Change	Max Abs Gradient Element	Step Size	Slope Search Direc
1	0	38	0	121.86537	0.1020	6.3068	0.00376	-54.483
2	0	57	0	121.76369	0.1017	6.9381	0.0100	-33.359
3	0	76	0	121.55605	0.2076	5.1526	0.0100	-31.265
4	0	95	0	121.36386	0.1922	5.7292	0.0100	-37.419
5	0	114	0	121.25741	0.1064	5.5107	0.0100	-17.708
6	0	133	0	121.22578	0.0316	4.9213	0.0240	-2.905
7	0	152	0	121.20582	0.0200	6.0114	0.0316	-1.268
8	0	171	0	121.18747	0.0183	5.5324	0.0457	-0.805
9	0	207	0	121.13613	0.0513	0.5829	0.628	-0.164
10	0	226	0	121.13536	0.000766	0.2054	1.000	-0.0021
11	0	245	0	121.13528	0.000082	0.0534	1.000	-0.0002
12	0	264	0	121.13528	2.537E-6	0.0101	1.000	-637E-8
13	0	283	0	121.13528	1.475E-7	0.000270	1.000	-3E-7

Figure 35.49 shows the final parameter estimates.

Figure 35.49 Results of Parameter Estimates for the VARMA(1, 1) Model

The VARMAX Procedure		
Optimization Results		
Parameter Estimates		
N	Parameter	Estimate
1	AR1_1_1	1.018085
2	AR1_2_1	0.391465
3	AR1_1_2	-0.386513
4	AR1_2_2	0.552904
5	MA1_1_1	0.322906
6	MA1_2_1	-0.165661
7	MA1_1_2	-0.021533
8	MA1_2_2	0.586132

Figure 35.50 shows the AR coefficient matrix in terms of lag 1, the MA coefficient matrix in terms of lag 1, the parameter estimates, and their significance, which is one indication of how well the model fits the data.

Figure 35.50 Parameter Estimates for the VARMA(1, 1) Model

The VARMAX Procedure						
Type of Model			VARMA(1,1)			
Estimation Method			Maximum Likelihood Estimation			
AR						
Lag	Variable	y1		y2		
1	y1	1.01809		-0.38651		
	y2	0.39147		0.55290		
MA						
Lag	Variable	e1		e2		
1	y1	0.32291		-0.02153		
	y2	-0.16566		0.58613		
Schematic Representation						
Variable/ Lag		AR1		MA1		
y1		+-		+		
y2		++		+.		
+ is > 2*std error, - is < -2*std error, . is between, * is N/A						
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y1	AR1_1_1	1.01809	0.10257	9.93	0.0001	y1(t-1)
	AR1_1_2	-0.38651	0.09644	-4.01	0.0001	y2(t-1)
	MA1_1_1	0.32291	0.14530	2.22	0.0285	e1(t-1)
	MA1_1_2	-0.02153	0.14200	-0.15	0.8798	e2(t-1)
y2	AR1_2_1	0.39147	0.10062	3.89	0.0002	y1(t-1)
	AR1_2_2	0.55290	0.08421	6.57	0.0001	y2(t-1)
	MA1_2_1	-0.16566	0.15700	-1.06	0.2939	e1(t-1)
	MA1_2_2	0.58612	0.14115	4.15	0.0001	e2(t-1)

The fitted VARMA(1,1) model with estimated standard errors in parentheses is given as

$$\mathbf{y}_t = \begin{pmatrix} 1.01809 & -0.38651 \\ (0.10256) & (0.09644) \\ 0.39147 & 0.55290 \\ (0.10062) & (0.08421) \end{pmatrix} \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t - \begin{pmatrix} 0.32291 & -0.02153 \\ (0.14530) & (0.14199) \\ -0.16566 & 0.58613 \\ (0.15699) & (0.14115) \end{pmatrix} \boldsymbol{\epsilon}_{t-1}$$

VARMAX Modeling

A VARMAX(p, q, s) process is written as

$$\mathbf{y}_t = \boldsymbol{\delta} + \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \boldsymbol{\epsilon}_t - \sum_{i=1}^q \Theta_i \boldsymbol{\epsilon}_{t-i}$$

or

$$\Phi(B)\mathbf{y}_t = \boldsymbol{\delta} + \Theta^*(B)\mathbf{x}_t + \Theta(B)\boldsymbol{\epsilon}_t$$

where $\Phi(B) = I_k - \sum_{i=1}^p \Phi_i B^i$, $\Theta^*(B) = \Theta_0^* + \Theta_1^* B + \cdots + \Theta_s^* B^s$, and $\Theta(B) = I_k - \sum_{i=1}^q \Theta_i B^i$.

The dimension of the state-space vector of the Kalman filtering method for the parameter estimation of the VARMAX(p, q, s) model is large, which takes time and memory for computing. For convenience, the parameter estimation of the VARMAX(p, q, s) model uses the two-stage estimation method, which first estimates the deterministic terms and exogenous parameters, and then maximizes the log-likelihood function of a VARMA(p, q) model.

Some examples of VARMAX modeling are as follows:

```
model y1 y2 = x1 / q=1;
nloptions tech=qn;

model y1 y2 = x1 / p=1 q=1 xlag=1 nocurrentx;
nloptions tech=qn;
```

Model Diagnostic Checks

Multivariate Model Diagnostic Checks

- **Information Criterion** After fitting some candidate models to the data, various model selection criteria (normalized by T) can be used to choose the appropriate model. The following list includes the Akaike information criterion (AIC), the corrected Akaike information criterion (AICC), the final prediction error criterion (FPE), the Hannan-Quinn criterion (HQC), and the Schwarz Bayesian criterion

(SBC, also referred to as BIC):

$$\begin{aligned} \text{AIC} &= \log(|\tilde{\Sigma}|) + 2r/T \\ \text{AICC} &= \log(|\tilde{\Sigma}|) + 2r/(T - r/k) \\ \text{FPE} &= \left(\frac{T + r/k}{T - r/k}\right)^k |\tilde{\Sigma}| \\ \text{HQC} &= \log(|\tilde{\Sigma}|) + 2r \log(\log(T))/T \\ \text{SBC} &= \log(|\tilde{\Sigma}|) + r \log(T)/T \end{aligned}$$

where r denotes the number of parameters estimated, k is the number of dependent variables, T is the number of observations used to estimate the model, and $\tilde{\Sigma}$ is the maximum likelihood estimate of Σ . When comparing models, choose the model with the smallest criterion values.

An example of the output was displayed in [Figure 35.4](#).

- **Portmanteau Q_s statistic** The Portmanteau Q_s statistic is used to test whether correlation remains on the model residuals. The null hypothesis is that the residuals are uncorrelated. Let $C_\epsilon(l)$ be the residual cross-covariance matrices, $\hat{\rho}_\epsilon(l)$ be the residual cross-correlation matrices as

$$C_\epsilon(l) = T^{-1} \sum_{t=1}^{T-l} \epsilon_t \epsilon'_{t+l}$$

and

$$\hat{\rho}_\epsilon(l) = \hat{V}_\epsilon^{-1/2} C_\epsilon(l) \hat{V}_\epsilon^{-1/2} \quad \text{and} \quad \hat{\rho}_\epsilon(-l) = \hat{\rho}_\epsilon(l)'$$

where $\hat{V}_\epsilon = \text{Diag}(\hat{\sigma}_{11}^2, \dots, \hat{\sigma}_{kk}^2)$ and $\hat{\sigma}_{ii}^2$ are the diagonal elements of $\hat{\Sigma}$. The multivariate portmanteau test defined in Hosking (1980) is

$$Q_s = T^2 \sum_{l=1}^s (T-l)^{-1} \text{tr}\{\hat{\rho}_\epsilon(l) \hat{\rho}_\epsilon(0)^{-1} \hat{\rho}_\epsilon(-l) \hat{\rho}_\epsilon(0)^{-1}\}$$

The statistic Q_s has approximately the chi-square distribution with $k^2(s - p - q)$ degrees of freedom. An example of the output is displayed in [Figure 35.7](#).

Univariate Model Diagnostic Checks

There are various ways to perform diagnostic checks for a univariate model. For details, see the section “Testing for Nonlinear Dependence: Heteroscedasticity Tests” on page 398 in Chapter 8, “The AUTOREG Procedure.” An example of the output is displayed in [Figure 35.8](#) and [Figure 35.9](#).

- **Durbin-Watson (DW) statistics:** The DW test statistics test for the first order autocorrelation in the residuals.
- **Jarque-Bera normality test:** This test is helpful in determining whether the model residuals represent a white noise process. This tests the null hypothesis that the residuals have normality.

- F tests for autoregressive conditional heteroscedastic (ARCH) disturbances: F test statistics test for the heteroscedastic disturbances in the residuals. This tests the null hypothesis that the residuals have equal covariances
- F tests for AR disturbance: These test statistics are computed from the residuals of the univariate AR(1), AR(1,2), AR(1,2,3) and AR(1,2,3,4) models to test the null hypothesis that the residuals are uncorrelated.

Cointegration

This section briefly introduces the concepts of cointegration (Johansen 1995b).

Definition 1. (Engle and Granger 1987): If a series y_t with no deterministic components can be represented by a stationary and invertible ARMA process after differencing d times, the series is integrated of order d , that is, $y_t \sim I(d)$.

Definition 2. (Engle and Granger 1987): If all elements of the vector \mathbf{y}_t are $I(d)$ and there exists a cointegrating vector $\boldsymbol{\beta} \neq 0$ such that $\boldsymbol{\beta}'\mathbf{y}_t \sim I(d - b)$ for any $b > 0$, the vector process is said to be cointegrated $CI(d, b)$.

A simple example of a cointegrated process is the following bivariate system:

$$\begin{aligned} y_{1t} &= \gamma y_{2t} + \epsilon_{1t} \\ y_{2t} &= y_{2,t-1} + \epsilon_{2t} \end{aligned}$$

with ϵ_{1t} and ϵ_{2t} being uncorrelated white noise processes. In the second equation, y_{2t} is a random walk, $\Delta y_{2t} = \epsilon_{2t}$, $\Delta \equiv 1 - B$. Differencing the first equation results in

$$\Delta y_{1t} = \gamma \Delta y_{2t} + \Delta \epsilon_{1t} = \gamma \epsilon_{2t} + \epsilon_{1t} - \epsilon_{1,t-1}$$

Thus, both y_{1t} and y_{2t} are $I(1)$ processes, but the linear combination $y_{1t} - \gamma y_{2t}$ is stationary. Hence $\mathbf{y}_t = (y_{1t}, y_{2t})'$ is cointegrated with a cointegrating vector $\boldsymbol{\beta} = (1, -\gamma)'$.

In general, if the vector process \mathbf{y}_t has k components, then there can be more than one cointegrating vector $\boldsymbol{\beta}'$. It is assumed that there are r linearly independent cointegrating vectors with $r < k$, which make the $k \times r$ matrix $\boldsymbol{\beta}$. The rank of matrix $\boldsymbol{\beta}$ is r , which is called the *cointegration rank* of \mathbf{y}_t .

Common Trends

This section briefly discusses the implication of cointegration for the moving-average representation. Let \mathbf{y}_t be cointegrated $CI(1, 1)$, then $\Delta \mathbf{y}_t$ has the Wold representation:

$$\Delta \mathbf{y}_t = \boldsymbol{\delta} + \Psi(B)\boldsymbol{\epsilon}_t$$

where ϵ_t is *iid*(0, Σ), $\Psi(B) = \sum_{j=0}^{\infty} \Psi_j B^j$ with $\Psi_0 = I_k$, and $\sum_{j=0}^{\infty} j |\Psi_j| < \infty$.

Assume that $\epsilon_t = 0$ if $t \leq 0$ and \mathbf{y}_0 is a nonrandom initial value. Then the difference equation implies that

$$\mathbf{y}_t = \mathbf{y}_0 + \delta t + \Psi(1) \sum_{i=0}^t \epsilon_i + \Psi^*(B) \epsilon_t$$

where $\Psi^*(B) = (1 - B)^{-1}(\Psi(B) - \Psi(1))$ and $\Psi^*(B)$ is absolutely summable.

Assume that the rank of $\Psi(1)$ is $m = k - r$. When the process \mathbf{y}_t is cointegrated, there is a cointegrating $k \times r$ matrix β such that $\beta' \mathbf{y}_t$ is stationary.

Premultiplying \mathbf{y}_t by β' results in

$$\beta' \mathbf{y}_t = \beta' \mathbf{y}_0 + \beta' \Psi^*(B) \epsilon_t$$

because $\beta' \Psi(1) = 0$ and $\beta' \delta = 0$.

Stock and Watson (1988) showed that the cointegrated process \mathbf{y}_t has a common trends representation derived from the moving-average representation. Since the rank of $\Psi(1)$ is $m = k - r$, there is a $k \times r$ matrix H_1 with rank r such that $\Psi(1)H_1 = 0$. Let H_2 be a $k \times m$ matrix with rank m such that $H_2' H_1 = 0$; then $A = C(1)H_2$ has rank m . The $H = (H_1, H_2)$ has rank k . By construction of H ,

$$\Psi(1)H = [0, A] = AS_m$$

where $S_m = (0_{m \times r}, I_m)$. Since $\beta' \Psi(1) = 0$ and $\beta' \delta = 0$, δ lies in the column space of $\Psi(1)$ and can be written

$$\delta = C(1)\tilde{\delta}$$

where $\tilde{\delta}$ is a k -dimensional vector. The common trends representation is written as

$$\begin{aligned} \mathbf{y}_t &= \mathbf{y}_0 + \Psi(1)[\tilde{\delta}t + \sum_{i=0}^t \epsilon_i] + \Psi^*(B)\epsilon_t \\ &= \mathbf{y}_0 + \Psi(1)H[H^{-1}\tilde{\delta}t + H^{-1}\sum_{i=0}^t \epsilon_i] + \mathbf{a}_t \\ &= \mathbf{y}_0 + A\tau_t + \mathbf{a}_t \end{aligned}$$

and

$$\tau_t = \pi + \tau_{t-1} + \mathbf{v}_t$$

where $\mathbf{a}_t = \Psi^*(B)\epsilon_t$, $\pi = S_m H^{-1}\tilde{\delta}$, $\tau_t = S_m [H^{-1}\tilde{\delta}t + H^{-1}\sum_{i=0}^t \epsilon_i]$, and $\mathbf{v}_t = S_m H^{-1}\epsilon_t$.

Stock and Watson showed that the common trends representation expresses \mathbf{y}_t as a linear combination of m random walks (τ_t) with drift π plus $I(0)$ components (\mathbf{a}_t).

Test for the Common Trends

Stock and Watson (1988) proposed statistics for common trends testing. The null hypothesis is that the k -dimensional time series \mathbf{y}_t has m common stochastic trends, where $m \leq k$ and the alternative is that it has s common trends, where $s < m$. The test procedure of m versus s common stochastic trends is performed based on the first-order serial correlation matrix of \mathbf{y}_t . Let β_\perp be a $k \times m$ matrix orthogonal to the cointegrating matrix such that $\beta_\perp' \beta = 0$ and $\beta_\perp \beta_\perp' = I_m$. Let $\mathbf{z}_t = \beta_\perp' \mathbf{y}_t$ and $\mathbf{w}_t = \beta_\perp' \mathbf{y}_t$. Then

$$\mathbf{w}_t = \beta_\perp' \mathbf{y}_0 + \beta_\perp' \delta t + \beta_\perp' \Psi(1) \sum_{i=0}^t \epsilon_i + \beta_\perp' \Psi^*(B) \epsilon_t$$

Combining the expression of \mathbf{z}_t and \mathbf{w}_t ,

$$\begin{bmatrix} \mathbf{z}_t \\ \mathbf{w}_t \end{bmatrix} = \begin{bmatrix} \beta_\perp' \mathbf{y}_0 \\ \beta_\perp' \mathbf{y}_0 \end{bmatrix} + \begin{bmatrix} 0 \\ \beta_\perp' \delta \end{bmatrix} t + \begin{bmatrix} 0 \\ \beta_\perp' \Psi(1) \end{bmatrix} \sum_{i=1}^t \epsilon_i + \begin{bmatrix} \beta_\perp' \Psi^*(B) \\ \beta_\perp' \Psi^*(B) \end{bmatrix} \epsilon_t$$

The Stock-Watson common trends test is performed based on the component \mathbf{w}_t by testing whether $\beta_\perp' \Psi(1)$ has rank m against rank s .

The following statements perform the Stock-Watson test for common trends:

```
proc iml;
  sig = 100*i(2);
  phi = {-0.2 0.1, 0.5 0.2, 0.8 0.7, -0.4 0.6};
  call varmasim(y,phi) sigma=sig n=100 initial=0
               seed=45876;

  cn = {'y1' 'y2'};
  create simul2 from y[colname=cn];
  append from y;
quit;

data simul2;
  set simul2;
  date = intnx('year', '01jan1900'd, _n_-1 );
  format date year4. ;
run;

proc varmax data=simul2;
  model y1 y2 / p=2 cointtest=(sw);
run;
```

In Figure 35.51, the first column is the null hypothesis that \mathbf{y}_t has $m \leq k$ common trends; the second column is the alternative hypothesis that \mathbf{y}_t has $s < m$ common trends; the third column contains the eigenvalues used for the test statistics; the fourth column contains the test statistics using $AR(p)$ filtering of the data. The table shows the output of the case $p = 2$.

Figure 35.51 Common Trends Test (COINTTEST=(SW) Option)

The VARMAX Procedure					
Common Trend Test					
H0: Rank=m	H1: Rank=s	Eigenvalue	Filter	5% Critical Value	Lag
1	0	1.000906	0.09	-14.10	2
2	0	0.996763	-0.32	-8.80	
	1	0.648908	-35.11	-23.00	

The test statistic for testing for 2 versus 1 common trends is more negative (-35.1) than the critical value (-23.0). Therefore, the test rejects the null hypothesis, which means that the series has a single common trend.

Vector Error Correction Modeling

This section discusses the implication of cointegration for the autoregressive representation. Assume that the cointegrated series can be represented by a vector error correction model according to the Granger representation theorem (Engle and Granger 1987). Consider the vector autoregressive process with Gaussian errors defined by

$$\mathbf{y}_t = \sum_{i=1}^p \Phi_i \mathbf{y}_{t-i} + \boldsymbol{\epsilon}_t$$

or

$$\Phi(B)\mathbf{y}_t = \boldsymbol{\epsilon}_t$$

where the initial values, $\mathbf{y}_{-p+1}, \dots, \mathbf{y}_0$, are fixed and $\boldsymbol{\epsilon}_t \sim N(0, \Sigma)$. Since the AR operator $\Phi(B)$ can be re-expressed as $\Phi(B) = \Phi^*(B)(1 - B) + \Phi(1)B$, where $\Phi^*(B) = I_k - \sum_{i=1}^{p-1} \Phi_i^* B^i$ with $\Phi_i^* = -\sum_{j=i+1}^p \Phi_j$, the vector error correction model is

$$\Phi^*(B)(1 - B)\mathbf{y}_t = \boldsymbol{\alpha}\boldsymbol{\beta}'\mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

or

$$\Delta\mathbf{y}_t = \boldsymbol{\alpha}\boldsymbol{\beta}'\mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta\mathbf{y}_{t-i} + \boldsymbol{\epsilon}_t$$

where $\boldsymbol{\alpha}\boldsymbol{\beta}' = -\Phi(1) = -I_k + \Phi_1 + \Phi_2 + \dots + \Phi_p$.

One motivation for the VECM(p) form is to consider the relation $\beta' \mathbf{y}_t = \mathbf{c}$ as defining the underlying economic relations and assume that the agents react to the disequilibrium error $\beta' \mathbf{y}_t - \mathbf{c}$ through the adjustment coefficient α to restore equilibrium; that is, they satisfy the economic relations. The cointegrating vector, β is sometimes called the *long-run parameters*.

You can consider a vector error correction model with a deterministic term. The deterministic term D_t can contain a constant, a linear trend, and seasonal dummy variables. Exogenous variables can also be included in the model.

$$\Delta \mathbf{y}_t = \Pi \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \epsilon_t$$

where $\Pi = \alpha \beta'$.

The alternative vector error correction representation considers the error correction term at lag $t - p$ and is written as

$$\Delta \mathbf{y}_t = \sum_{i=1}^{p-1} \Phi_i^{\#} \Delta \mathbf{y}_{t-i} + \Pi^{\#} \mathbf{y}_{t-p} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \epsilon_t$$

If the matrix Π has a full-rank ($r = k$), all components of \mathbf{y}_t are $I(0)$. On the other hand, \mathbf{y}_t are stationary in difference if $\text{rank}(\Pi) = 0$. When the rank of the matrix Π is $r < k$, there are $k - r$ linear combinations that are nonstationary and r stationary cointegrating relations. Note that the linearly independent vector $\mathbf{z}_t = \beta' \mathbf{y}_t$ is stationary and this transformation is not unique unless $r = 1$. There does not exist a unique cointegrating matrix β since the coefficient matrix Π can also be decomposed as

$$\Pi = \alpha M M^{-1} \beta' = \alpha^* \beta^{*'}$$

where M is an $r \times r$ nonsingular matrix.

Test for the Cointegration

The cointegration rank test determines the linearly independent columns of Π . Johansen (1988, 1995a) and Johansen and Juselius (1990) proposed the cointegration rank test by using the reduced rank regression.

Different Specifications of Deterministic Trends

When you construct the VECM(p) form from the VAR(p) model, the deterministic terms in the VECM(p) form can differ from those in the VAR(p) model. When there are deterministic cointegrated relationships among variables, deterministic terms in the VAR(p) model are not present in the VECM(p) form. On the other hand, if there are stochastic cointegrated relationships in the VAR(p) model, deterministic terms appear in the VECM(p) form via the error correction term or as an independent term in the VECM(p) form. There are five different specifications of deterministic trends in the VECM(p) form.

- **Case 1:** There is no separate drift in the VECM(p) form.

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \epsilon_t$$

- **Case 2:** There is no separate drift in the VECM(p) form, but a constant enters only via the error correction term.

$$\Delta \mathbf{y}_t = \alpha (\beta', \beta_0) (\mathbf{y}'_{t-1}, 1)' + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \epsilon_t$$

- **Case 3:** There is a separate drift and no separate linear trend in the VECM(p) form.

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \delta_0 + \epsilon_t$$

- **Case 4:** There is a separate drift and no separate linear trend in the VECM(p) form, but a linear trend enters only via the error correction term.

$$\Delta \mathbf{y}_t = \alpha (\beta', \beta_1) (\mathbf{y}'_{t-1}, t)' + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \delta_0 + \epsilon_t$$

- **Case 5:** There is a separate linear trend in the VECM(p) form.

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + \delta_0 + \delta_1 t + \epsilon_t$$

First, focus on Cases 1, 3, and 5 to test the null hypothesis that there are at most r cointegrating vectors. Let

$$\begin{aligned} Z_{0t} &= \Delta \mathbf{y}_t \\ Z_{1t} &= \mathbf{y}_{t-1} \\ Z_{2t} &= [\Delta \mathbf{y}'_{t-1}, \dots, \Delta \mathbf{y}'_{t-p+1}, D_t]' \\ Z_0 &= [Z_{01}, \dots, Z_{0T}]' \\ Z_1 &= [Z_{11}, \dots, Z_{1T}]' \\ Z_2 &= [Z_{21}, \dots, Z_{2T}]' \end{aligned}$$

where D_t can be empty for Case 1, 1 for Case 3, and $(1, t)$ for Case 5.

In Case 2, Z_{1t} and Z_{2t} are defined as

$$\begin{aligned} Z_{1t} &= [\mathbf{y}'_{t-1}, 1]' \\ Z_{2t} &= [\Delta \mathbf{y}'_{t-1}, \dots, \Delta \mathbf{y}'_{t-p+1}]' \end{aligned}$$

In Case 4, Z_{1t} and Z_{2t} are defined as

$$\begin{aligned} Z_{1t} &= [\mathbf{y}'_{t-1}, t]' \\ Z_{2t} &= [\Delta \mathbf{y}'_{t-1}, \dots, \Delta \mathbf{y}'_{t-p+1}, 1]' \end{aligned}$$

Let Ψ be the matrix of parameters consisting of $\Phi_1^*, \dots, \Phi_{p-1}^*$, A , and $\Theta_0^*, \dots, \Theta_s^*$, where parameters A corresponds to regressors D_t . Then the VECM(p) form is rewritten in these variables as

$$Z_{0t} = \alpha \beta' Z_{1t} + \Psi Z_{2t} + \epsilon_t$$

The log-likelihood function is given by

$$\begin{aligned} \ell &= -\frac{kT}{2} \log 2\pi - \frac{T}{2} \log |\Sigma| \\ &\quad - \frac{1}{2} \sum_{t=1}^T (Z_{0t} - \alpha \beta' Z_{1t} - \Psi Z_{2t})' \Sigma^{-1} (Z_{0t} - \alpha \beta' Z_{1t} - \Psi Z_{2t}) \end{aligned}$$

The residuals, R_{0t} and R_{1t} , are obtained by regressing Z_{0t} and Z_{1t} on Z_{2t} , respectively. The regression equation of residuals is

$$R_{0t} = \alpha \beta' R_{1t} + \hat{\epsilon}_t$$

The crossproducts matrices are computed

$$S_{ij} = \frac{1}{T} \sum_{t=1}^T R_{it} R'_{jt}, \quad i, j = 0, 1$$

Then the maximum likelihood estimator for β is obtained from the eigenvectors that correspond to the r largest eigenvalues of the following equation:

$$|\lambda S_{11} - S_{10} S_{00}^{-1} S_{01}| = 0$$

The eigenvalues of the preceding equation are squared canonical correlations between R_{0t} and R_{1t} , and the eigenvectors that correspond to the r largest eigenvalues are the r linear combinations of \mathbf{y}_{t-1} , which have the largest squared partial correlations with the stationary process $\Delta \mathbf{y}_t$ after correcting for lags and deterministic terms. Such an analysis calls for a reduced rank regression of $\Delta \mathbf{y}_t$ on \mathbf{y}_{t-1} corrected for $(\Delta \mathbf{y}_{t-1}, \dots, \Delta \mathbf{y}_{t-p+1}, D_t)$, as discussed by Anderson (1951). Johansen (1988) suggests two test statistics to test the null hypothesis that there are at most r cointegrating vectors

$$H_0 : \lambda_i = 0 \text{ for } i = r + 1, \dots, k$$

Trace Test

The trace statistic for testing the null hypothesis that there are at most r cointegrating vectors is as follows:

$$\lambda_{trace} = -T \sum_{i=r+1}^k \log(1 - \lambda_i)$$

The asymptotic distribution of this statistic is given by

$$tr \left\{ \int_0^1 (dW) \tilde{W}' \left(\int_0^1 \tilde{W} \tilde{W}' dr \right)^{-1} \int_0^1 \tilde{W} (dW)' \right\}$$

where $tr(A)$ is the trace of a matrix A , W is the $k - r$ dimensional Brownian motion, and \tilde{W} is the Brownian motion itself, or the demeaned or detrended Brownian motion according to the different specifications of deterministic trends in the vector error correction model.

Maximum Eigenvalue Test

The maximum eigenvalue statistic for testing the null hypothesis that there are at most r cointegrating vectors is as follows:

$$\lambda_{max} = -T \log(1 - \lambda_{r+1})$$

The asymptotic distribution of this statistic is given by

$$\max \left\{ \int_0^1 (dW) \tilde{W}' \left(\int_0^1 \tilde{W} \tilde{W}' dr \right)^{-1} \int_0^1 \tilde{W} (dW)' \right\}$$

where $\max(A)$ is the maximum eigenvalue of a matrix A . Osterwald-Lenum (1992) provided detailed tables of the critical values of these statistics.

The following statements use the JOHANSEN option to compute the Johansen cointegration rank trace test of integrated order 1:

```
proc varmax data=simul2;
  model y1 y2 / p=2 cointtest=(johansen=(normalize=y1));
run;
```

Figure 35.52 shows the output based on the model specified in the MODEL statement, an intercept term is assumed. In the “Cointegration Rank Test Using Trace” table, the column Drift In ECM means there is no separate drift in the error correction model and the column Drift In Process means the process has a constant drift before differencing. The “Cointegration Rank Test Using Trace” table shows the trace statistics based on Case 3 and the “Cointegration Rank Test Using Trace under Restriction” table shows the trace statistics based on Case 2. The output indicates that the series are cointegrated with rank 1 because the trace statistics are smaller than the critical values in both Case 2 and Case 3.

Figure 35.52 Cointegration Rank Test (COINTTEST=(JOHANSEN=) Option)

The VARMAX Procedure						
Cointegration Rank Test Using Trace						
H0: Rank=r	H1: Rank>r	Eigenvalue	Trace	5% Critical Value	Drift in ECM	Drift in Process
0	0	0.4644	61.7522	15.34	Constant	Linear
1	1	0.0056	0.5552	3.84		
Cointegration Rank Test Using Trace Under Restriction						
H0: Rank=r	H1: Rank>r	Eigenvalue	Trace	5% Critical Value	Drift in ECM	Drift in Process
0	0	0.5209	76.3788	19.99	Constant	Constant
1	1	0.0426	4.2680	9.13		

Figure 35.53 shows which result, either Case 2 (the hypothesis H0) or Case 3 (the hypothesis H1), is appropriate depending on the significance level. Since the cointegration rank is chosen to be 1 by the result in Figure 35.52, look at the last row that corresponds to rank=1. Since the p -value is 0.054, the Case 2 cannot be rejected at the significance level 5%, but it can be rejected at the significance level 10%. For modeling of the two Case 2 and Case 3, see Figure 35.56 and Figure 35.57.

Figure 35.53 Cointegration Rank Test Continued

Hypothesis of the Restriction					
		Hypothesis	Drift in ECM	Drift in Process	
		H0 (Case 2)	Constant	Constant	
		H1 (Case 3)	Constant	Linear	
Hypothesis Test of the Restriction					
Rank	Eigenvalue	Restricted Eigenvalue	DF	Chi-Square	Pr > ChiSq
0	0.4644	0.5209	2	14.63	0.0007
1	0.0056	0.0426	1	3.71	0.0540

Figure 35.54 shows the estimates of long-run parameter (Beta) and adjustment coefficients (Alpha) based on Case 3.

Figure 35.54 Cointegration Rank Test Continued

Beta		
Variable	1	2
y1	1.00000	1.00000
y2	-2.04869	-0.02854
Alpha		
Variable	1	2
y1	-0.46421	-0.00502
y2	0.17535	-0.01275

Using the NORMALIZE= option, the first row of the “Beta” table has 1. Considering that the cointegration rank is 1, the long-run relationship of the series is

$$\begin{aligned}
 \beta' y_t &= \begin{bmatrix} 1 & -2.04869 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \end{bmatrix} \\
 &= y_{1t} - 2.04869 y_{2t} \\
 y_{1t} &= 2.04869 y_{2t}
 \end{aligned}$$

Figure 35.55 shows the estimates of long-run parameter (Beta) and adjustment coefficients (Alpha) based on Case 2.

Figure 35.55 Cointegration Rank Test Continued

Beta Under Restriction		
Variable	1	2
y1	1.00000	1.00000
y2	-2.04366	-2.75773
1	6.75919	101.37051
Alpha Under Restriction		
Variable	1	2
y1	-0.48015	0.01091
y2	0.12538	0.03722

Considering that the cointegration rank is 1, the long-run relationship of the series is

$$\begin{aligned}\beta' y_t &= \begin{bmatrix} 1 & -2.04366 & 6.75919 \end{bmatrix} \begin{bmatrix} y_1 \\ y_2 \\ 1 \end{bmatrix} \\ &= y_{1t} - 2.04366 y_{2t} + 6.75919 \\ y_{1t} &= 2.04366 y_{2t} - 6.75919\end{aligned}$$

Estimation of Vector Error Correction Model

The preceding log-likelihood function is maximized for

$$\begin{aligned}\hat{\beta} &= S_{11}^{-1/2} [v_1, \dots, v_r] \\ \hat{\alpha} &= S_{01} \hat{\beta} (\hat{\beta}' S_{11} \hat{\beta})^{-1} \\ \hat{\Pi} &= \hat{\alpha} \hat{\beta}' \\ \hat{\Psi}' &= (Z_2' Z_2)^{-1} Z_2' (Z_0 - Z_1 \hat{\Pi}') \\ \hat{\Sigma} &= (Z_0 - Z_2 \hat{\Psi}' - Z_1 \hat{\Pi}')' (Z_0 - Z_2 \hat{\Psi}' - Z_1 \hat{\Pi}') / T\end{aligned}$$

The estimators of the orthogonal complements of α and β are

$$\hat{\beta}_{\perp} = S_{11} [v_{r+1}, \dots, v_k]$$

and

$$\hat{\alpha}_{\perp} = S_{00}^{-1} S_{01} [v_{r+1}, \dots, v_k]$$

The ML estimators have the following asymptotic properties:

$$\sqrt{T} \text{vec}([\hat{\Pi}, \hat{\Psi}] - [\Pi, \Psi]) \xrightarrow{d} N(0, \Sigma_{co})$$

where

$$\Sigma_{co} = \Sigma \otimes \left(\begin{bmatrix} \beta & 0 \\ 0 & I_k \end{bmatrix} \Omega^{-1} \begin{bmatrix} \beta' & 0 \\ 0 & I_k \end{bmatrix} \right)$$

and

$$\Omega = \text{plim} \frac{1}{T} \begin{bmatrix} \beta' Z_1' Z_1 \beta & \beta' Z_1' Z_2 \\ Z_2' Z_1 \beta & Z_2' Z_2 \end{bmatrix}$$

The following statements are examples of fitting the five different cases of the vector error correction models mentioned in the previous section.

For fitting Case 1,

```
model y1 y2 / p=2 ecm=(rank=1 normalize=y1) noint;
```

For fitting Case 2,

```
model y1 y2 / p=2 ecm=(rank=1 normalize=y1 ectrend);
```

For fitting Case 3,

```
model y1 y2 / p=2 ecm=(rank=1 normalize=y1);
```

For fitting Case 4,

```
model y1 y2 / p=2 ecm=(rank=1 normalize=y1 ectrend)
trend=linear;
```

For fitting Case 5,

```
model y1 y2 / p=2 ecm=(rank=1 normalize=y1) trend=linear;
```

From [Figure 35.53](#) that uses the COINTTEST=(JOHANSEN) option, you can fit the model by using either Case 2 or Case 3 because the test was not significant at the 0.05 level, but was significant at the 0.10 level. Here both models are fitted to show the difference in output display. [Figure 35.56](#) is for Case 2, and [Figure 35.57](#) is for Case 3.

For Case 2,

```
proc varmax data=simul2;
  model y1 y2 / p=2 ecm=(rank=1 normalize=y1 ectrend)
    print=(estimates);
run;
```

Figure 35.56 Parameter Estimation with the ECTREND Option

The VARMAX Procedure						
Parameter Alpha * Beta' Estimates						
Variable		y1	y2	1		
y1		-0.48015	0.98126	-3.24543		
y2		0.12538	-0.25624	0.84748		
AR Coefficients of Differenced Lag						
DIF Lag	Variable	y1	y2			
1	y1	-0.72759	-0.77463			
	y2	0.38982	-0.55173			
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
D_y1	CONST1	-3.24543	0.33022			1, EC
	AR1_1_1	-0.48015	0.04886			y1(t-1)
	AR1_1_2	0.98126	0.09984			y2(t-1)
	AR2_1_1	-0.72759	0.04623	-15.74	0.0001	D_y1(t-1)
	AR2_1_2	-0.77463	0.04978	-15.56	0.0001	D_y2(t-1)
D_y2	CONST2	0.84748	0.35394			1, EC
	AR1_2_1	0.12538	0.05236			y1(t-1)
	AR1_2_2	-0.25624	0.10702			y2(t-1)
	AR2_2_1	0.38982	0.04955	7.87	0.0001	D_y1(t-1)
	AR2_2_2	-0.55173	0.05336	-10.34	0.0001	D_y2(t-1)

Figure 35.56 can be reported as follows:

$$\Delta \mathbf{y}_t = \begin{bmatrix} -0.48015 & 0.98126 & -3.24543 \\ 0.12538 & -0.25624 & 0.84748 \end{bmatrix} \begin{bmatrix} y_{1,t-1} \\ y_{2,t-1} \\ 1 \end{bmatrix} + \begin{bmatrix} -0.72759 & -0.77463 \\ 0.38982 & -0.55173 \end{bmatrix} \Delta \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

The keyword “EC” in the “Model Parameter Estimates” table means that the ECTREND option is used for fitting the model.

For fitting Case 3,

```
proc varmax data=simul2;
  model y1 y2 / p=2 ecm=(rank=1 normalize=y1)
               print=(estimates);
run;
```


Figure 35.57 Parameter Estimation without the ECTREND Option

The VARMAX Procedure						
Parameter Alpha * Beta' Estimates						
Variable		y1		y2		
y1		-0.46421		0.95103		
y2		0.17535		-0.35923		
AR Coefficients of Differenced Lag						
DIF Lag	Variable	y1		y2		
1	y1	-0.74052		-0.76305		
	y2	0.34820		-0.51194		
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
D_y1	CONST1	-2.60825	1.32398	-1.97	0.0518	1
	AR1_1_1	-0.46421	0.05474			y1 (t-1)
	AR1_1_2	0.95103	0.11215			y2 (t-1)
	AR2_1_1	-0.74052	0.05060	-14.63	0.0001	D_y1 (t-1)
	AR2_1_2	-0.76305	0.05352	-14.26	0.0001	D_y2 (t-1)
D_y2	CONST2	3.43005	1.39587	2.46	0.0159	1
	AR1_2_1	0.17535	0.05771			y1 (t-1)
	AR1_2_2	-0.35923	0.11824			y2 (t-1)
	AR2_2_1	0.34820	0.05335	6.53	0.0001	D_y1 (t-1)
	AR2_2_2	-0.51194	0.05643	-9.07	0.0001	D_y2 (t-1)

Figure 35.57 can be reported as follows:

$$\Delta \mathbf{y}_t = \begin{bmatrix} -0.46421 & 0.95103 \\ 0.17535 & -0.35293 \end{bmatrix} \mathbf{y}_{t-1} + \begin{bmatrix} -0.74052 & -0.76305 \\ 0.34820 & -0.51194 \end{bmatrix} \Delta \mathbf{y}_{t-1} + \begin{bmatrix} -2.60825 \\ 3.43005 \end{bmatrix} + \boldsymbol{\epsilon}_t$$

Test for the Linear Restriction on the Parameters

Consider the example with the variables m_t log real money, y_t log real income, i_t^d deposit interest rate, and i_t^b bond interest rate. It seems a natural hypothesis that in the long-run relation, money and income have equal coefficients with opposite signs. This can be formulated as the hypothesis that the cointegrated relation contains only m_t and y_t through $m_t - y_t$. For the analysis, you can express these restrictions in the parameterization of H such that $\boldsymbol{\beta} = H\boldsymbol{\phi}$, where H is a known $k \times s$ matrix and $\boldsymbol{\psi}$ is the $s \times r$ ($r \leq s < k$)

parameter matrix to be estimated. For this example, H is given by

$$H = \begin{bmatrix} 1 & 0 & 0 \\ -1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

Restriction $H_0: \beta = H\phi$

When the linear restriction $\beta = H\phi$ is given, it implies that the same restrictions are imposed on all cointegrating vectors. You obtain the maximum likelihood estimator of β by reduced rank regression of Δy_t on $H y_{t-1}$ corrected for $(\Delta y_{t-1}, \dots, \Delta y_{t-p+1}, D_t)$, solving the following equation

$$|\rho H' S_{11} H - H' S_{10} S_{00}^{-1} S_{01} H| = 0$$

for the eigenvalues $1 > \rho_1 > \dots > \rho_s > 0$ and eigenvectors (v_1, \dots, v_s) , S_{ij} given in the preceding section. Then choose $\hat{\phi} = (v_1, \dots, v_r)$ that corresponds to the r largest eigenvalues, and the $\hat{\beta}$ is $H\hat{\phi}$.

The test statistic for $H_0: \beta = H\phi$ is given by

$$T \sum_{i=1}^r \log\{(1 - \rho_i)/(1 - \lambda_i)\} \xrightarrow{d} \chi_{r(k-s)}^2$$

If the series has no deterministic trend, the constant term should be restricted by $\alpha'_{\perp} \delta_0 = 0$ as in Case 2. Then H is given by

$$H = \begin{bmatrix} 1 & 0 & 0 & 0 \\ -1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

The following statements test that $2\beta_1 + \beta_2 = 0$:

```
proc varmax data=simul2;
  model y1 y2 / p=2 ecm=(rank=1 normalize=y1);
  cointeg rank=1 h=(1,-2);
run;
```

Figure 35.58 shows the results of testing $H_0: 2\beta_1 + \beta_2 = 0$. The input H matrix is $H = (1 - 2)'$. The adjustment coefficient is reestimated under the restriction, and the test indicates that you cannot reject the null hypothesis.

Figure 35.58 Testing of Linear Restriction (H= Option)

The VARMAX Procedure					
Beta Under Restriction					
Variable		1			
y1		1.00000			
y2		-2.00000			
Alpha Under Restriction					
Variable		1			
y1		-0.47404			
y2		0.17534			
Hypothesis Test					
Index	Eigenvalue	Restricted Eigenvalue	DF	Chi-Square	Pr > ChiSq
1	0.4644	0.4616	1	0.51	0.4738

Test for the Weak Exogeneity and Restrictions of Alpha

Consider a vector error correction model:

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + A D_t + \epsilon_t$$

Divide the process \mathbf{y}_t into $(\mathbf{y}'_{1t}, \mathbf{y}'_{2t})'$ with dimension k_1 and k_2 and the Σ into

$$\Sigma = \begin{bmatrix} \Sigma_{11} & \Sigma_{12} \\ \Sigma_{21} & \Sigma_{22} \end{bmatrix}$$

Similarly, the parameters can be decomposed as follows:

$$\alpha = \begin{bmatrix} \alpha_1 \\ \alpha_2 \end{bmatrix} \quad \Phi_i^* = \begin{bmatrix} \Phi_{1i}^* \\ \Phi_{2i}^* \end{bmatrix} \quad A = \begin{bmatrix} A_1 \\ A_2 \end{bmatrix}$$

Then the VECM(p) form can be rewritten by using the decomposed parameters and processes:

$$\begin{bmatrix} \Delta \mathbf{y}_{1t} \\ \Delta \mathbf{y}_{2t} \end{bmatrix} = \begin{bmatrix} \alpha_1 \\ \alpha_2 \end{bmatrix} \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \begin{bmatrix} \Phi_{1i}^* \\ \Phi_{2i}^* \end{bmatrix} \Delta \mathbf{y}_{t-i} + \begin{bmatrix} A_1 \\ A_2 \end{bmatrix} D_t + \begin{bmatrix} \epsilon_{1t} \\ \epsilon_{2t} \end{bmatrix}$$

The conditional model for \mathbf{y}_{1t} given \mathbf{y}_{2t} is

$$\begin{aligned}\Delta \mathbf{y}_{1t} = & \omega \Delta \mathbf{y}_{2t} + (\alpha_1 - \omega \alpha_2) \boldsymbol{\beta}' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} (\Phi_{1i}^* - \omega \Phi_{2i}^*) \Delta \mathbf{y}_{t-i} \\ & + (A_1 - \omega A_2) D_t + \boldsymbol{\epsilon}_{1t} - \omega \boldsymbol{\epsilon}_{2t}\end{aligned}$$

and the marginal model of \mathbf{y}_{2t} is

$$\Delta \mathbf{y}_{2t} = \alpha_2 \boldsymbol{\beta}' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_{2i}^* \Delta \mathbf{y}_{t-i} + A_2 D_t + \boldsymbol{\epsilon}_{2t}$$

where $\omega = \Sigma_{12} \Sigma_{22}^{-1}$.

The test of weak exogeneity of \mathbf{y}_{2t} for the parameters $(\alpha_1, \boldsymbol{\beta})$ determines whether $\alpha_2 = 0$. Weak exogeneity means that there is no information about $\boldsymbol{\beta}$ in the marginal model or that the variables \mathbf{y}_{2t} do not react to a disequilibrium.

Restriction $H_0: \boldsymbol{\alpha} = J\boldsymbol{\psi}$

Consider the null hypothesis $H_0: \boldsymbol{\alpha} = J\boldsymbol{\psi}$, where J is a $k \times m$ matrix with $r \leq m < k$.

From the previous residual regression equation

$$R_{0t} = \boldsymbol{\alpha} \boldsymbol{\beta}' R_{1t} + \hat{\boldsymbol{\epsilon}}_t = J\boldsymbol{\psi} \boldsymbol{\beta}' R_{1t} + \hat{\boldsymbol{\epsilon}}_t$$

you can obtain

$$\begin{aligned}\bar{J}' R_{0t} &= \boldsymbol{\psi} \boldsymbol{\beta}' R_{1t} + \bar{J}' \hat{\boldsymbol{\epsilon}}_t \\ J_{\perp}' R_{0t} &= J_{\perp}' \hat{\boldsymbol{\epsilon}}_t\end{aligned}$$

where $\bar{J} = J(J'J)^{-1}$ and J_{\perp} is orthogonal to J such that $J_{\perp}' J = 0$.

Define

$$\Sigma_{JJ_{\perp}} = \bar{J}' \Sigma J_{\perp} \text{ and } \Sigma_{J_{\perp} J_{\perp}} = J_{\perp}' \Sigma J_{\perp}$$

and let $\omega = \Sigma_{JJ_{\perp}} \Sigma_{J_{\perp} J_{\perp}}^{-1}$. Then $\bar{J}' R_{0t}$ can be written as

$$\bar{J}' R_{0t} = \boldsymbol{\psi} \boldsymbol{\beta}' R_{1t} + \omega J_{\perp}' R_{0t} + \bar{J}' \hat{\boldsymbol{\epsilon}}_t - \omega J_{\perp}' \hat{\boldsymbol{\epsilon}}_t$$

Using the marginal distribution of $J_{\perp}' R_{0t}$ and the conditional distribution of $\bar{J}' R_{0t}$, the new residuals are computed as

$$\begin{aligned}\tilde{R}_{Jt} &= \bar{J}' R_{0t} - S_{JJ_{\perp}} S_{J_{\perp} J_{\perp}}^{-1} J_{\perp}' R_{0t} \\ \tilde{R}_{1t} &= R_{1t} - S_{1J_{\perp}} S_{J_{\perp} J_{\perp}}^{-1} J_{\perp}' R_{0t}\end{aligned}$$

where

$$S_{JJ_{\perp}} = \bar{J}' S_{00} J_{\perp}, \quad S_{J_{\perp} J_{\perp}} = J'_{\perp} S_{00} J_{\perp}, \quad \text{and} \quad S_{J_{\perp} 1} = J'_{\perp} S_{01}$$

In terms of \tilde{R}_{Jt} and \tilde{R}_{1t} , the MLE of β is computed by using the reduced rank regression. Let

$$S_{ij.J_{\perp}} = \frac{1}{T} \sum_{t=1}^T \tilde{R}_{it} \tilde{R}'_{jt}, \quad \text{for } i, j = 1, J$$

Under the null hypothesis $H_0: \alpha = J\psi$, the MLE $\tilde{\beta}$ is computed by solving the equation

$$|\rho S_{11.J_{\perp}} - S_{1J.J_{\perp}} S_{JJ.J_{\perp}}^{-1} S_{J1.J_{\perp}}| = 0$$

Then $\tilde{\beta} = (v_1, \dots, v_r)$, where the eigenvectors correspond to the r largest eigenvalues and are normalized such that $\tilde{\beta}' S_{11.J_{\perp}} \tilde{\beta} = I_r$; $\tilde{\alpha} = J S_{J1.J_{\perp}} \tilde{\beta}$. The likelihood ratio test for $H_0: \alpha = J\psi$ is

$$T \sum_{i=1}^r \log\{(1 - \rho_i)/(1 - \lambda_i)\} \xrightarrow{d} \chi^2_{r(k-m)}$$

See Theorem 6.1 in Johansen and Juselius (1990) for more details.

The test of weak exogeneity of y_{2t} is a special case of the test $\alpha = J\psi$, considering $J = (I_{k_1}, 0)'$. Consider the previous example with four variables (m_t, y_t, i_t^b, i_t^d) . If $r = 1$, you formulate the weak exogeneity of (y_t, i_t^b, i_t^d) for m_t as $J = [1, 0, 0, 0]'$ and the weak exogeneity of i_t^d for (m_t, y_t, i_t^b) as $J = [I_3, 0]'$.

The following statements test the weak exogeneity of other variables, assuming $r = 1$:

```
proc varmax data=simul2;
  model y1 y2 / p=2 ecm=(rank=1 normalize=y1);
  cointeg rank=1 exogeneity;
run;

proc varmax data=simul2;
  model y1 y2 / p=2 ecm=(rank=1 normalize=y1);
  cointeg rank=1 j=exogeneity;
run;
```

Figure 35.59 shows that each variable is not the weak exogeneity of other variable.

Figure 35.59 Testing of Weak Exogeneity (EXOGENEITY Option)

The VARMAX Procedure			
Testing Weak Exogeneity of Each Variables			
Variable	DF	Chi-Square	Pr > ChiSq
y1	1	53.46	<.0001
y2	1	8.76	0.0031

Forecasting of the VECM

Consider the cointegrated moving-average representation of the differenced process of \mathbf{y}_t

$$\Delta \mathbf{y}_t = \boldsymbol{\delta} + \Psi(B)\boldsymbol{\epsilon}_t$$

Assume that $\mathbf{y}_0 = 0$. The linear process \mathbf{y}_t can be written as

$$\mathbf{y}_t = \boldsymbol{\delta}t + \sum_{i=1}^t \sum_{j=0}^{t-i} \Psi_j \boldsymbol{\epsilon}_i$$

Therefore, for any $l > 0$,

$$\mathbf{y}_{t+l} = \boldsymbol{\delta}(t+l) + \sum_{i=1}^t \sum_{j=0}^{t+l-i} \Psi_j \boldsymbol{\epsilon}_i + \sum_{i=1}^l \sum_{j=0}^{l-i} \Psi_j \boldsymbol{\epsilon}_{t+i}$$

The l -step-ahead forecast is derived from the preceding equation:

$$\mathbf{y}_{t+l|t} = (t+l)\boldsymbol{\delta} + \sum_{i=1}^t \sum_{j=0}^{t+l-i} \Psi_j \boldsymbol{\epsilon}_i$$

Note that

$$\lim_{l \rightarrow \infty} \boldsymbol{\beta}' \mathbf{y}_{t+l|t} = 0$$

since $\lim_{l \rightarrow \infty} \sum_{j=0}^{t+l-i} \Psi_j = \Psi(1)$ and $\boldsymbol{\beta}'\Psi(1) = 0$. The long-run forecast of the cointegrated system shows that the cointegrated relationship holds, although there might exist some deviations from the equilibrium status in the short-run. The covariance matrix of the predict error $\mathbf{e}_{t+l|t} = \mathbf{y}_{t+l} - \mathbf{y}_{t+l|t}$ is

$$\Sigma(l) = \sum_{i=1}^l \left[\left(\sum_{j=0}^{l-i} \Psi_j \right) \Sigma \left(\sum_{j=0}^{l-i} \Psi_j' \right) \right]$$

When the linear process is represented as a VECM(p) model, you can obtain

$$\Delta \mathbf{y}_t = \Pi \mathbf{y}_{t-1} + \sum_{j=1}^{p-1} \Phi_j^* \Delta \mathbf{y}_{t-j} + \boldsymbol{\delta} + \boldsymbol{\epsilon}_t$$

The transition equation is defined as

$$\mathbf{z}_t = F \mathbf{z}_{t-1} + \mathbf{e}_t$$

where $\mathbf{z}_t = (\mathbf{y}'_{t-1}, \Delta \mathbf{y}'_t, \Delta \mathbf{y}'_{t-1}, \dots, \Delta \mathbf{y}'_{t-p+2})'$ is a state vector and the transition matrix is

$$F = \begin{bmatrix} I_k & I_k & 0 & \cdots & 0 \\ \Pi & (\Pi + \Phi_1^*) & \Phi_2^* & \cdots & \Phi_{p-1}^* \\ 0 & I_k & 0 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 0 & 0 & \cdots & I_k & 0 \end{bmatrix}$$

where 0 is a $k \times k$ zero matrix. The observation equation can be written

$$\mathbf{y}_t = \delta t + H \mathbf{z}_t$$

where $H = [I_k, I_k, 0, \dots, 0]$.

The l -step-ahead forecast is computed as

$$\mathbf{y}_{t+l|t} = \delta(t+l) + HF^l \mathbf{z}_t$$

Cointegration with Exogenous Variables

The error correction model with exogenous variables can be written as follows:

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \epsilon_t$$

The following statements demonstrate how to fit VECMX(p, s), where $p = 2$ and $s = 1$ from the P=2 and XLAG=1 options:

```
proc varmax data=simul3;
  model y1 y2 = x1 / p=2 xlag=1 ecm=(rank=1);
run;
```

The following statements demonstrate how to BVECMX(2,1):

```
proc varmax data=simul3;
  model y1 y2 = x1 / p=2 xlag=1 ecm=(rank=1)
  prior=(lambda=0.9 theta=0.1);
run;
```

I(2) Model

The VARX(p, s) model can be written in the error correction form:

$$\Delta \mathbf{y}_t = \alpha \beta' \mathbf{y}_{t-1} + \sum_{i=1}^{p-1} \Phi_i^* \Delta \mathbf{y}_{t-i} + A D_t + \sum_{i=0}^s \Theta_i^* \mathbf{x}_{t-i} + \epsilon_t$$

Johansen (1995a) proposed the two-step procedure to analyze the $I(2)$ model. In the first step, the values of (r, α, β) are estimated using the reduced rank regression analysis, performing the regression analysis $\Delta^2 \mathbf{y}_t$, $\Delta \mathbf{y}_{t-1}$, and \mathbf{y}_{t-1} on $\Delta^2 \mathbf{y}_{t-1}, \dots, \Delta^2 \mathbf{y}_{t-p+2}$, and D_t . This gives residuals R_{0t} , R_{1t} , and R_{2t} , and residual product moment matrices

$$M_{ij} = \frac{1}{T} \sum_{t=1}^T R_{it} R'_{jt} \text{ for } i, j = 0, 1, 2$$

Perform the reduced rank regression analysis $\Delta^2 \mathbf{y}_t$ on \mathbf{y}_{t-1} corrected for $\Delta \mathbf{y}_{t-1}, \Delta^2 \mathbf{y}_{t-1}, \dots, \Delta^2 \mathbf{y}_{t-p+2}$, and D_t , and solve the eigenvalue problem of the equation

$$|\lambda M_{22.1} - M_{20.1} M_{00.1}^{-1} M_{02.1}| = 0$$

where $M_{ij.1} = M_{ij} - M_{i1} M_{11}^{-1} M_{1j}$ for $i, j = 0, 2$.

In the second step, if (r, α, β) are known, the values of (s, ξ, η) are determined using the reduced rank regression analysis, regressing $\hat{\alpha}'_{\perp} \Delta^2 \mathbf{y}_t$ on $\hat{\beta}'_{\perp} \Delta \mathbf{y}_{t-1}$ corrected for $\Delta^2 \mathbf{y}_{t-1}, \dots, \Delta^2 \mathbf{y}_{t-p+2}$, D_t , and $\hat{\beta}' \Delta \mathbf{y}_{t-1}$.

The reduced rank regression analysis reduces to the solution of an eigenvalue problem for the equation

$$|\rho M_{\beta_{\perp} \beta_{\perp} \cdot \beta} - M_{\beta_{\perp} \alpha_{\perp} \cdot \beta} M_{\alpha_{\perp} \alpha_{\perp} \cdot \beta}^{-1} M_{\alpha_{\perp} \beta_{\perp} \cdot \beta}| = 0$$

where

$$\begin{aligned} M_{\beta_{\perp} \beta_{\perp} \cdot \beta} &= \beta'_{\perp} (M_{11} - M_{11} \beta (\beta' M_{11} \beta)^{-1} \beta' M_{11}) \beta_{\perp} \\ M'_{\beta_{\perp} \alpha_{\perp} \cdot \beta} &= M_{\alpha_{\perp} \beta_{\perp} \cdot \beta} = \bar{\alpha}'_{\perp} (M_{01} - M_{01} \beta (\beta' M_{11} \beta)^{-1} \beta' M_{11}) \beta_{\perp} \\ M_{\alpha_{\perp} \alpha_{\perp} \cdot \beta} &= \bar{\alpha}'_{\perp} (M_{00} - M_{01} \beta (\beta' M_{11} \beta)^{-1} \beta' M_{10}) \bar{\alpha}_{\perp} \end{aligned}$$

where $\bar{\alpha} = \alpha(\alpha' \alpha)^{-1}$.

The solution gives eigenvalues $1 > \rho_1 > \dots > \rho_s > 0$ and eigenvectors (v_1, \dots, v_s) . Then, the ML estimators are

$$\begin{aligned} \hat{\eta} &= (v_1, \dots, v_s) \\ \hat{\xi} &= M_{\alpha_{\perp} \beta_{\perp} \cdot \beta} \hat{\eta} \end{aligned}$$

The likelihood ratio test for the reduced rank model $H_{r,s}$ with rank $\leq s$ in the model $H_{r,k-r} = H_r^0$ is given by

$$Q_{r,s} = -T \sum_{i=s+1}^{k-r} \log(1 - \rho_i), \quad s = 0, \dots, k - r - 1$$

The following statements compute the rank test to test for cointegrated order 2:

```
proc varmax data=simul2;
  model y1 y2 / p=2 cointtest=(johansen=(iorder=2));
run;
```

The last two columns in Figure 35.60 explain the cointegration rank test with integrated order 1. The results indicate that there is the cointegrated relationship with the cointegration rank 1 with respect to the 0.05 significance level because the test statistic of 0.5552 is smaller than the critical value of 3.84. Now, look at the row associated with $r = 1$. Compare the test statistic value, 211.84512, to the critical value, 3.84, for the cointegrated order 2. There is no evidence that the series are integrated order 2 at the 0.05 significance level.

Figure 35.60 Cointegrated I(2) Test (IORDER= Option)

The VARMAX Procedure				
Cointegration Rank Test for I(2)				
r\k-r-s	2	1	Trace of I(1)	5% CV of I(1)
0	720.40735	308.69199	61.7522	15.34
1		211.84512	0.5552	3.84
5% CV I(2)	15.34000	3.84000		

Multivariate GARCH Modeling

Stochastic volatility modeling is important in many areas, particularly in finance. To study the volatility of time series, GARCH models are widely used because they provide a good approach to conditional variance modeling.

BEKK Representation

Engle and Kroner (1995) propose a general multivariate GARCH model and call it a BEKK representation. Let $\mathcal{F}(t-1)$ be the sigma field generated by the past values of ϵ_t , and let H_t be the conditional covariance matrix of the k -dimensional random vector ϵ_t . Let H_t be measurable with respect to $\mathcal{F}(t-1)$; then the multivariate GARCH model can be written as

$$\epsilon_t | \mathcal{F}(t-1) \sim N(0, H_t)$$

$$H_t = C + \sum_{i=1}^q A_i' \epsilon_{t-i} \epsilon_{t-i}' A_i + \sum_{i=1}^p G_i' H_{t-i} G_i$$

where C , A_i and G_i are $k \times k$ parameter matrices.

Consider a bivariate GARCH(1,1) model as follows:

$$H_t = \begin{bmatrix} c_{11} & c_{12} \\ c_{12} & c_{22} \end{bmatrix} + \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix}' \begin{bmatrix} \epsilon_{1,t-1}^2 & \epsilon_{1,t-1}\epsilon_{2,t-1} \\ \epsilon_{2,t-1}\epsilon_{1,t-1} & \epsilon_{2,t-1}^2 \end{bmatrix} \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \\ + \begin{bmatrix} g_{11} & g_{12} \\ g_{21} & g_{22} \end{bmatrix}' H_{t-1} \begin{bmatrix} g_{11} & g_{12} \\ g_{21} & g_{22} \end{bmatrix}$$

or, representing the univariate model,

$$h_{11,t} = c_{11} + a_{11}^2 \epsilon_{1,t-1}^2 + 2a_{11}a_{21}\epsilon_{1,t-1}\epsilon_{2,t-1} + a_{21}^2 \epsilon_{2,t-1}^2 \\ + g_{11}^2 h_{11,t-1} + 2g_{11}g_{21}h_{12,t-1} + g_{21}^2 h_{22,t-1} \\ h_{12,t} = c_{12} + a_{11}a_{12}\epsilon_{1,t-1}^2 + (a_{21}a_{12} + a_{11}a_{22})\epsilon_{1,t-1}\epsilon_{2,t-1} + a_{21}a_{22}\epsilon_{2,t-1}^2 \\ + g_{11}g_{12}h_{11,t-1} + (g_{21}g_{12} + g_{11}g_{22})h_{12,t-1} + g_{21}g_{22}h_{22,t-1} \\ h_{22,t} = c_{22} + a_{12}^2 \epsilon_{1,t-1}^2 + 2a_{12}a_{22}\epsilon_{1,t-1}\epsilon_{2,t-1} + a_{22}^2 \epsilon_{2,t-1}^2 \\ + g_{12}^2 h_{11,t-1} + 2g_{12}g_{22}h_{12,t-1} + g_{22}^2 h_{22,t-1}$$

For the BEKK representation of the bivariate GARCH(1,1) model, the SAS statements are:

```
model y1 y2;
garch q=1 p=1 form=bekk;
```

CCC Representation

Bollerslev (1990) propose a multivariate GARCH model with time-varying conditional variances and covariances but constant conditional correlations.

The conditional covariance matrix H_t consists of

$$H_t = D_t \Gamma D_t$$

where D_t is a $k \times k$ stochastic diagonal matrix with element σ_{it} and Γ is a $k \times k$ time-invariant matrix with the typical element ρ_{ij} .

The elements of H_t are

$$h_{ii,t} = c_i + \sum_{l=1}^q a_{ii,l} \epsilon_{i,t-l}^2 + \sum_{l=1}^p g_{ii,l} h_{ii,t-l} \quad i, j = 1, \dots, k \\ h_{ij,t} = \rho_{ij} (h_{ii,t} h_{jj,t})^{1/2} \quad i \neq j$$

Estimation of GARCH Model

The log-likelihood function of the multivariate GARCH model is written without a constant term

$$\ell = -\frac{1}{2} \sum_{t=1}^T [\log |H_t| + \epsilon_t' H_t^{-1} \epsilon_t]$$

The log-likelihood function is maximized by an iterative numerical method such as quasi-Newton optimization. The starting values for the regression parameters are obtained from the least squares estimates. The covariance of ϵ_t is used as the starting values for the GARCH constant parameters, and the starting value used for the other GARCH parameters is either 10^{-6} or 10^{-3} depending on the GARCH models representation. For the identification of the parameters of a BEKK representation GARCH model, the diagonal elements of the GARCH constant, the ARCH, and the GARCH parameters are restricted to be positive.

Covariance Stationarity

Define the multivariate GARCH process as

$$\mathbf{h}_t = \sum_{i=1}^{\infty} G(B)^{i-1} [\mathbf{c} + A(B)\eta_t]$$

where $\mathbf{h}_t = \text{vec}(H_t)$, $\mathbf{c} = \text{vec}(C_0)$, and $\eta_t = \text{vec}(\epsilon_t \epsilon_t')$. This representation is equivalent to a GARCH(p, q) model by the following algebra:

$$\begin{aligned} \mathbf{h}_t &= \mathbf{c} + A(B)\eta_t + \sum_{i=2}^{\infty} G(B)^{i-1} [\mathbf{c} + A(B)\eta_t] \\ &= \mathbf{c} + A(B)\eta_t + G(B) \sum_{i=1}^{\infty} G(B)^{i-1} [\mathbf{c} + A(B)\eta_t] \\ &= \mathbf{c} + A(B)\eta_t + G(B)\mathbf{h}_t \end{aligned}$$

Defining $A(B) = \sum_{i=1}^q (A_i \otimes A_i)' B^i$ and $G(B) = \sum_{i=1}^p (G_i \otimes G_i)' B^i$ gives a BEKK representation.

The necessary and sufficient conditions for covariance stationarity of the multivariate GARCH process is that all the eigenvalues of $A(1) + G(1)$ are less than one in modulus.

An Example of a VAR(1)–ARCH(1) Model

The following DATA step simulates a bivariate vector time series to provide test data for the multivariate GARCH model:

```
data garch;
  retain seed 16587;
  esq1 = 0; esq2 = 0;
  ly1 = 0; ly2 = 0;
  do i = 1 to 1000;
    ht = 6.25 + 0.5*esq1;
    call rannor(seed,ehat);
    e1 = sqrt(ht)*ehat;
    ht = 1.25 + 0.7*esq2;
    call rannor(seed,ehat);
    e2 = sqrt(ht)*ehat;
    y1 = 2 + 1.2*ly1 - 0.5*ly2 + e1;
    y2 = 4 + 0.6*ly1 + 0.3*ly2 + e2;
    if i>500 then output;
    esq1 = e1*e1; esq2 = e2*e2;
    ly1 = y1; ly2 = y2;
  end;
  keep y1 y2;
run;
```

The following statements fit a VAR(1)–ARCH(1) model to the data. For a VAR-ARCH model, you specify the order of the autoregressive model with the P=1 option in the MODEL statement and the Q=1 option in the GARCH statement. In order to produce the initial and final values of parameters, the TECH=QN option is specified in the NLOPTIONS statement.

```
proc varmax data=garch;
  model y1 y2 / p=1
    print=(roots estimates diagnose);
  garch q=1;
  nloptions tech=qn;
run;
```

Figure 35.61 through Figure 35.65 show the details of this example. Figure 35.61 shows the initial values of parameters.

Figure 35.61 Start Parameter Estimates for the VAR(1)–ARCH(1) Model

The VARMAX Procedure			
Optimization Start Parameter Estimates			
N	Parameter	Estimate	Gradient Objective Function
1	CONST1	2.249575	5.787988
2	CONST2	3.902673	-4.856056
3	AR1_1_1	1.231775	-17.155796
4	AR1_2_1	0.576890	23.991176
5	AR1_1_2	-0.528405	14.656979
6	AR1_2_2	0.343714	-12.763695
7	GCHC1_1	9.929763	-0.111361
8	GCHC1_2	0.193163	-0.684986
9	GCHC2_2	4.063245	0.139403
10	ACH1_1_1	0.001000	-0.668058
11	ACH1_2_1	0	-0.068657
12	ACH1_1_2	0	-0.735896
13	ACH1_2_2	0.001000	-3.126628

Figure 35.62 shows the final parameter estimates.

Figure 35.62 Results of Parameter Estimates for the VAR(1)–ARCH(1) Model

The VARMAX Procedure		
Optimization Results Parameter Estimates		
N	Parameter	Estimate
1	CONST1	1.943991
2	CONST2	4.073898
3	AR1_1_1	1.220945
4	AR1_2_1	0.608263
5	AR1_1_2	-0.527121
6	AR1_2_2	0.303012
7	GCHC1_1	8.359045
8	GCHC1_2	-0.182483
9	GCHC2_2	1.602739
10	ACH1_1_1	0.377569
11	ACH1_2_1	0.032158
12	ACH1_1_2	0.056491
13	ACH1_2_2	0.710023

Figure 35.63 shows the conditional variance using the BEKK representation of the ARCH(1) model. The ARCH parameters are estimated by the vectorized parameter matrices.

$$\begin{aligned}\epsilon_t | \mathcal{F}(t-1) &\sim N(0, H_t) \\ H_t &= \begin{bmatrix} 8.35905 & -0.18250 \\ -0.18250 & 1.60275 \end{bmatrix} \\ &+ \begin{bmatrix} 0.37757 & 0.05649 \\ 0.03216 & 0.71002 \end{bmatrix}' \epsilon_{t-1} \epsilon_{t-1}' \begin{bmatrix} 0.37757 & 0.05649 \\ 0.03216 & 0.71002 \end{bmatrix}\end{aligned}$$

Figure 35.63 ARCH(1) Parameter Estimates for the VAR(1)–ARCH(1) Model

The VARMAX Procedure				
Type of Model	VAR(1)-ARCH(1)			
Estimation Method	Maximum Likelihood Estimation			
Representation Type	BEKK			
GARCH Model Parameter Estimates				
Parameter	Estimate	Standard Error	t Value	Pr > t
GCHC1_1	8.35905	0.73116	11.43	0.0001
GCHC1_2	-0.18248	0.21706	-0.84	0.4009
GCHC2_2	1.60274	0.19398	8.26	0.0001
ACH1_1_1	0.37757	0.07470	5.05	0.0001
ACH1_2_1	0.03216	0.06971	0.46	0.6448
ACH1_1_2	0.05649	0.02622	2.15	0.0317
ACH1_2_2	0.71002	0.06844	10.37	0.0001

Figure 35.64 shows the AR parameter estimates and their significance.

The fitted VAR(1) model with the previous conditional covariance ARCH model is written as follows:

$$\mathbf{y}_t = \begin{bmatrix} 1.94399 \\ 4.07390 \end{bmatrix} + \begin{bmatrix} 1.22094 & -0.52712 \\ 0.60826 & 0.30301 \end{bmatrix} \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

Figure 35.64 VAR(1) Parameter Estimates for the VAR(1)–ARCH(1) Model

Model Parameter Estimates						
Equation Parameter		Estimate	Standard Error	t Value	Pr > t	Variable
y1	CONST1	1.94399	0.21017	9.25	0.0001	1
	AR1_1_1	1.22095	0.02564	47.63	0.0001	y1(t-1)
	AR1_1_2	-0.52712	0.02836	-18.59	0.0001	y2(t-1)
y2	CONST2	4.07390	0.10574	38.53	0.0001	1
	AR1_2_1	0.60826	0.01231	49.42	0.0001	y1(t-1)
	AR1_2_2	0.30301	0.01498	20.23	0.0001	y2(t-1)

Figure 35.65 shows the roots of the AR and ARCH characteristic polynomials. The eigenvalues have a modulus less than one.

Figure 35.65 Roots for the VAR(1)–ARCH(1) Model

Roots of AR Characteristic Polynomial					
Index	Real	Imaginary	Modulus	Radian	Degree
1	0.76198	0.33163	0.8310	0.4105	23.5197
2	0.76198	-0.33163	0.8310	-0.4105	-23.5197
Roots of GARCH Characteristic Polynomial					
Index	Real	Imaginary	Modulus	Radian	Degree
1	0.51180	0.00000	0.5118	0.0000	0.0000
2	0.26627	0.00000	0.2663	0.0000	0.0000
3	0.26627	0.00000	0.2663	0.0000	0.0000
4	0.13853	0.00000	0.1385	0.0000	0.0000

Output Data Sets

The VARMAX procedure can create the OUT=, OUTEST=, OUTHT=, and OUTSTAT= data sets. In general, if processing fails, the output is not recorded or is set to missing in the relevant output data set, and appropriate error and/or warning messages are recorded in the log.

OUT= Data Set

The OUT= data set contains the forecast values produced by the OUTPUT statement. The following output variables can be created:

- the BY variables
- the ID variable
- the MODEL statement dependent (endogenous) variables. These variables contain the actual values from the input data set.
- FOR_i , numeric variables that contain the forecasts. The FOR_i variables contain the forecasts for the i th endogenous variable in the MODEL statement list. Forecasts are one-step-ahead predictions until the end of the data or until the observation specified by the BACK= option. Multistep forecasts can be computed after that point based on the LEAD= option.
- RES_i , numeric variables that contain the residual for the forecast of the i th endogenous variable in the MODEL statement list. For multistep forecast observations, the actual values are missing and the RES_i variables contain missing values.
- STD_i , numeric variables that contain the standard deviation for the forecast of the i th endogenous variable in the MODEL statement list. The values of the STD_i variables can be used to construct univariate confidence limits for the corresponding forecasts.
- LCI_i , numeric variables that contain the lower confidence limits for the corresponding forecasts of the i th endogenous variable in the MODEL statement list.
- UCI_i , numeric variables that contain the upper confidence limits for the corresponding forecasts of the i th endogenous variable in the MODEL statement list.

The OUT= data set contains the values shown in Table 35.3 and Table 35.4 for a bivariate case.

Table 35.3 OUT= Data Set

Obs	ID variable	y1	FOR1	RES1	STD1	LCI1	UCI1
1	date	y_{11}	f_{11}	r_{11}	σ_{11}	l_{11}	u_{11}
2	date	y_{12}	f_{12}	r_{12}	σ_{11}	l_{12}	u_{12}
⋮							

Table 35.4 OUT= Data Set Continued

Obs	y2	FOR2	RES2	STD2	LCI2	UCI2
1	y_{21}	f_{21}	r_{21}	σ_{22}	l_{21}	u_{21}
2	y_{22}	f_{22}	r_{22}	σ_{22}	l_{22}	u_{22}
⋮						

Consider the following example:

```

proc varmax data=simul1 noprint;
  id date interval=year;
  model y1 y2 / p=1 noint;
  output out=out lead=5;
run;

proc print data=out (firstobs=98);
run;

```

The output in Figure 35.66 shows part of the results of the OUT= data set for the preceding example.

Figure 35.66 OUT= Data Set

Obs	date	y1	FOR1	RES1	STD1	LCI1	UCI1
98	1997	-0.58433	-0.13500	-0.44934	1.13523	-2.36001	2.09002
99	1998	-2.07170	-1.00649	-1.06522	1.13523	-3.23150	1.21853
100	1999	-3.38342	-2.58612	-0.79730	1.13523	-4.81113	-0.36111
101	2000	.	-3.59212	.	1.13523	-5.81713	-1.36711
102	2001	.	-3.09448	.	1.70915	-6.44435	0.25539
103	2002	.	-2.17433	.	2.14472	-6.37792	2.02925
104	2003	.	-1.11395	.	2.43166	-5.87992	3.65203
105	2004	.	-0.14342	.	2.58740	-5.21463	4.92779

Obs	y2	FOR2	RES2	STD2	LCI2	UCI2
98	0.64397	-0.34932	0.99329	1.19096	-2.68357	1.98492
99	0.35925	-0.07132	0.43057	1.19096	-2.40557	2.26292
100	-0.64999	-0.99354	0.34355	1.19096	-3.32779	1.34070
101	.	-2.09873	.	1.19096	-4.43298	0.23551
102	.	-2.77050	.	1.47666	-5.66469	0.12369
103	.	-2.75724	.	1.74212	-6.17173	0.65725
104	.	-2.24943	.	2.01925	-6.20709	1.70823
105	.	-1.47460	.	2.25169	-5.88782	2.93863

OUTEST= Data Set

The OUTEST= data set contains estimation results of the fitted model produced by the VARMAX statement. The following output variables can be created:

- the BY variables
- NAME, a character variable that contains the name of endogenous (dependent) variables or the name of the parameters for the covariance of the matrix of the parameter estimates if the OUTCOV option is specified
- TYPE, a character variable that contains the value EST for parameter estimates, the value STD for standard error of parameter estimates, and the value COV for the covariance of the matrix of the parameter estimates if the OUTCOV option is specified

- **CONST**, a numeric variable that contains the estimates of constant parameters and their standard errors
- **SEASON_*i***, a numeric variable that contains the estimates of seasonal dummy parameters and their standard errors, where $i = 1, \dots, (nseason - 1)$, and *nseason* is based on the NSEASON= option
- **LTREND**, a numeric variable that contains the estimates of linear trend parameters and their standard errors
- **QTREND**, a numeric variable that contains the estimates of quadratic trend parameters and their standard errors
- **XL*l*_i**, numeric variables that contain the estimates of exogenous parameters and their standard errors, where *l* is the lag *l*th coefficient matrix and $i = 1, \dots, r$, where *r* is the number of exogenous variables
- **AR*l*_i**, numeric variables that contain the estimates of autoregressive parameters and their standard errors, where *l* is the lag *l*th coefficient matrix and $i = 1, \dots, k$, where *k* is the number of endogenous variables
- **MA*l*_i**, numeric variables that contain the estimates of moving-average parameters and their standard errors, where *l* is the lag *l*th coefficient matrix and $i = 1, \dots, k$, where *k* is the number of endogenous variables
- **ACH*l*_i** are numeric variables that contain the estimates of the ARCH parameters of the covariance matrix and their standard errors, where *l* is the lag *l*th coefficient matrix and $i = 1, \dots, k$ for BEKK and CCC representations, where *k* is the number of endogenous variables.
- **GCH*l*_i** are numeric variables that contain the estimates of the GARCH parameters of the covariance matrix and their standard errors, where *l* is the lag *l*th coefficient matrix and $i = 1, \dots, k$ for BEKK and CCC representations, where *k* is the number of endogenous variables.
- **GCHC*i*** are numeric variables that contain the estimates of the constant parameters of the covariance matrix and their standard errors, where $i = 1, \dots, k$ for BEKK representation, *k* is the number of endogenous variables, and $i = 1$ for CCC representation.
- **CCC*i*** are numeric variables that contain the estimates of the conditional constant correlation parameters for CCC representation where $i = 2, \dots, k$.

The OUTEST= data set contains the values shown [Table 35.5](#) for a bivariate case.

Table 35.5 OUTEST= Data Set

Obs	NAME	TYPE	CONST	AR1_1	AR1_2	AR2_1	AR2_2
1	y1	EST	δ_1	$\phi_{1,11}$	$\phi_{1,12}$	$\phi_{2,11}$	$\phi_{2,12}$
2		STD	$se(\delta_1)$	$se(\phi_{1,11})$	$se(\phi_{1,12})$	$se(\phi_{2,11})$	$se(\phi_{2,12})$
3	y2	EST	δ_2	$\phi_{1,21}$	$\phi_{1,22}$	$\phi_{2,21}$	$\phi_{2,22}$
4		STD	$se(\delta_2)$	$se(\phi_{1,21})$	$se(\phi_{1,22})$	$se(\phi_{2,21})$	$se(\phi_{2,22})$

Consider the following example:

```

proc varmax data=simul2 outest=est;
  model y1 y2 / p=2 noint
          ecm=(rank=1 normalize=y1)
          noprint;
run;

proc print data=est;
run;

```

The output in Figure 35.67 shows the results of the OUTEST= data set.

Figure 35.67 OUTEST= Data Set

Obs	NAME	TYPE	AR1_1	AR1_2	AR2_1	AR2_2
1	y1	EST	-0.46680	0.91295	-0.74332	-0.74621
2		STD	0.04786	0.09359	0.04526	0.04769
3	y2	EST	0.10667	-0.20862	0.40493	-0.57157
4		STD	0.05146	0.10064	0.04867	0.05128

OUTHT= Data Set

The OUTHT= data set contains prediction of the fitted GARCH model produced by the GARCH statement. The following output variables can be created.

- the BY variables
- H_{i_j} , numeric variables that contain the prediction of covariance, where $1 \leq i < j \leq k$, where k is the number of dependent variables

The OUTHT= data set contains the values shown in Table 35.6 for a bivariate case.

Table 35.6 OUTHT= Data Set

Obs	H1_1	H1_2	H2_2
1	h111	h121	h221
2	h112	h122	h222
:	:	:	:

Consider the following example of the OUTHT= option:

```

proc varmax data=garch;
  model y1 y2 / p=1
          print=(roots estimates diagnose);
  garch q=1 outht=ht;

```

```
run;
proc print data=ht(firstobs=495);
run;
```

The output in Figure 35.68 shows the part of the OUTHT= data set.

Figure 35.68 OUTHT= Data Set

Obs	h1_1	h1_2	h2_2
495	9.36568	-1.10406	2.44644
496	8.46807	-0.17464	1.60330
497	9.19686	0.09762	1.69639
498	8.40787	-0.33463	2.07687
499	8.88429	0.03646	1.69401
500	8.60844	-0.40260	1.79703

OUTSTAT= Data Set

The OUTSTAT= data set contains estimation results of the fitted model produced by the VARMAX statement. The following output variables can be created. The subindex i is $1, \dots, k$, where k is the number of endogenous variables.

- the BY variables
- NAME, a character variable that contains the name of endogenous (dependent) variables
- SIGMA_ i , numeric variables that contain the estimate of the innovation covariance matrix
- AICC, a numeric variable that contains the corrected Akaike's information criterion value
- HQC, a numeric variable that contains the Hannan-Quinn's information criterion value
- AIC, a numeric variable that contains the Akaike's information criterion value
- SBC, a numeric variable that contains the Schwarz Bayesian's information criterion value
- FPEC, a numeric variable that contains the final prediction error criterion value
- FValue, a numeric variable that contains the F statistics
- PValue, a numeric variable that contains p -value for the F statistics

If the JOHANSEN= option is specified, the following items are added:

- Eigenvalue, a numeric variable that contains eigenvalues for the cointegration rank test of integrated order 1

- `RestrictedEigenvalue`, a numeric variable that contains eigenvalues for the cointegration rank test of integrated order 1 when the `NOINT` option is not specified
- `Beta_i`, numeric variables that contain long-run effect parameter estimates, β
- `Alpha_i`, numeric variables that contain adjustment parameter estimates, α

If the `JOHANSEN=(IORDER=2)` option is specified, the following items are added:

- `EValueI2_i`, numeric variables that contain eigenvalues for the cointegration rank test of integrated order 2
- `EValueI1`, a numeric variable that contains eigenvalues for the cointegration rank test of integrated order 1
- `Eta_i`, numeric variables that contain the parameter estimates in integrated order 2, η
- `Xi_i`, numeric variables that contain the parameter estimates in integrated order 2, ξ

The `OUTSTAT=` data set contains the values shown [Table 35.7](#) for a bivariate case.

Table 35.7 `OUTSTAT=` Data Set

Obs	NAME	SIGMA_1	SIGMA_2	AICC	RSquare	FValue	PValue
1	y1	σ_{11}	σ_{12}	<i>aicc</i>	R_1^2	F_1	<i>prob</i> ₁
2	y2	σ_{21}	σ_{22}	.	R_2^2	F_2	<i>prob</i> ₂

Obs	EValueI2_1	EValueI2_2	EValueI1	Beta_1	Beta_2
1	e_{11}	e_{12}	e_1	β_{11}	β_{12}
2	e_{21}	.	e_2	β_{21}	β_{21}

Obs	Alpha_1	Alpha_2	Eta_1	Eta_2	Xi_1	Xi_2
1	α_{11}	α_{12}	η_{11}	η_{12}	ξ_{11}	ξ_{12}
2	α_{21}	α_{22}	η_{21}	η_{22}	ξ_{21}	ξ_{22}

Consider the following example:

```
proc varmax data=simul2 outstat=stat;
  model y1 y2 / p=2 noint
          cointtest=(johansen=(iorder=2))
          ecm=(rank=1 normalize=y1)
          noprint;
run;

proc print data=stat;
run;
```

The output in [Figure 35.69](#) shows the results of the `OUTSTAT=` data set.

Figure 35.69 OUTSTAT= Data Set

Obs	NAME	SIGMA_1	SIGMA_2	AICC	HQC	AIC	SBC	FPEC
1	y1	94.7557	4.527	9.37221	9.43236	9.36834	9.52661	11712.14
2	y2	4.5268	109.570
Obs	RSquare	FValue	PValue	EValue I2_1	EValue I2_2	EValue I1	Beta_1	Beta_2
1	0.93900	482.308	6.1637E-57	0.98486	0.95079	0.50864	1.00000	1.00000
2	0.93912	483.334	5.6124E-57	0.81451	.	0.01108	-1.95575	-1.33622
Obs	Alpha_1	Alpha_2	Eta_1	Eta_2	Xi_1	Xi_2		
1	-0.46680	0.007937	-0.012307	0.027030	54.1606	-52.3144		
2	0.10667	0.033530	0.015555	0.023086	-79.4240	-18.3308		

Printed Output

The default printed output produced by the VARMAX procedure is described in the following list:

- descriptive statistics, which include the number of observations used, the names of the variables, their means and standard deviations (STD), their minimums and maximums, the differencing operations used, and the labels of the variables
- a type of model to fit the data and an estimation method
- a table of parameter estimates that shows the following for each parameter: the variable name for the left-hand side of equation, the parameter name, the parameter estimate, the approximate standard error, t value, the approximate probability ($Pr > |t|$), and the variable name for the right-hand side of equations in terms of each parameter
- the innovation covariance matrix
- the information criteria

If PRINT=ESTIMATES is specified, the VARMAX procedure prints the following list with the default printed output:

- the estimates of the constant vector (or seasonal constant matrix), the trend vector, the coefficient matrices of the distributed lags, the AR coefficient matrices, and the MA coefficient matrices
- the ALPHA and BETA parameter estimates for the error correction model
- the schematic representation of parameter estimates

If PRINT=DIAGNOSE is specified, the VARMAX procedure prints the following list with the default printed output:

- the cross-covariance and cross-correlation matrices of the residuals
- the tables of test statistics for the hypothesis that the residuals of the model are white noise:
 - Durbin-Watson (DW) statistics
 - F test for autoregressive conditional heteroscedastic (ARCH) disturbances
 - F test for AR disturbance
 - Jarque-Bera normality test
 - Portmanteau test

ODS Table Names

The VARMAX procedure assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table:

Table 35.8 ODS Tables Produced in the VARMAX Procedure

ODS Table Name	Description	Option
ODS Tables Created by the MODEL Statement		
AccumImpulse	Accumulated impulse response matrices	IMPULSE=(ACCUM) IMPULSE=(ALL)
AccumImpulsebyVar	Accumulated impulse response by variable	IMPULSE=(ACCUM) IMPULSE=(ALL)
AccumImpulseX	Accumulated transfer function matrices	IMPULSX=(ACCUM) IMPULSX=(ALL)
AccumImpulseXbyVar	Accumulated transfer function by variable	IMPULSX=(ACCUM) IMPULSX=(ALL)
Alpha	α coefficients	JOHANSEN=
AlphaInECM	α coefficients when rank= r	ECM=
AlphaOnDrift	α coefficients under the restriction of a deterministic term	JOHANSEN=
AlphaBetaInECM	$\Pi = \alpha\beta'$ coefficients when rank= r	ECM=
ANOVA	Univariate model diagnostic checks for the residuals	PRINT=DIAGNOSE
ARCoef	AR coefficients	P=
ARRoots	Roots of AR characteristic polynomial	ROOTS with P=
Beta	β coefficients	JOHANSEN=
BetaInECM	β coefficients when rank= r	ECM=
BetaOnDrift	β coefficients under the restriction of a deterministic term	JOHANSEN=

Table 35.8 *continued*

ODS Table Name	Description	Option
Constant	Constant estimates	without NOINT
CorrB	Correlations of parameter estimates	CORRB
CorrResiduals	Correlations of residuals	PRINT=DIAGNOSE
CorrResidualsbyVar	Correlations of residuals by variable	PRINT=DIAGNOSE
CorrResidualsGraph	Schematic representation of correlations of residuals	PRINT=DIAGNOSE
CorrXGraph	Schematic representation of sample correlations of independent series	CORRX
CorrYGraph	Schematic representation of sample correlations of dependent series	CORRY
CorrXLags	Correlations of independent series	CORRX
CorrXbyVar	Correlations of independent series by variable	CORRX
CorrYLags	Correlations of dependent series	CORRY
CorrYbyVar	Correlations of dependent series by variable	CORRY
CovB	Covariances of parameter estimates	COVB
CovInnovation	Covariances of the innovations	default
CovPredictError	Covariance matrices of the prediction error	COVPE
CovPredictErrorbyVar	Covariances of the prediction error by variable	COVPE
CovResiduals	Covariances of residuals	PRINT=DIAGNOSE
CovResidualsbyVar	Covariances of residuals by variable	PRINT=DIAGNOSE
CovXLags	Covariances of independent series	COVX
CovXbyVar	Covariances of independent series by variable	COVX
CovYLags	Covariances of dependent series	COVY
CovYbyVar	Covariances of dependent series by variable	COVY
DecomposeCov-PredictError	Decomposition of the prediction error covariances	DECOMPOSE
DecomposeCov-PredictErrorbyVar	Decomposition of the prediction error covariances by variable	DECOMPOSE
DFTest	Dickey-Fuller test	DFTEST
DiagnostAR	Test the AR disturbance for the residuals	PRINT=DIAGNOSE
DiagnostWN	Test the ARCH disturbance and normality for the residuals	PRINT=DIAGNOSE
DynamicARCoef	AR coefficients of the dynamic model	DYNAMIC
DynamicConstant	Constant estimates of the dynamic model	DYNAMIC
DynamicCov-Innovation	Covariances of the innovations of the dynamic model	DYNAMIC
DynamicLinearTrend	Linear trend estimates of the dynamic model	DYNAMIC

Table 35.8 *continued*

ODS Table Name	Description	Option
DynamicMACoef	MA coefficients of the dynamic model	DYNAMIC
DynamicSConstant	Seasonal constant estimates of the dynamic model	DYNAMIC
DynamicParameterEstimates	Parameter estimates table of the dynamic model	DYNAMIC
DynamicParameterGraph	Schematic representation of the parameters of the dynamic model	DYNAMIC
DynamicQuadTrend	Quadratic trend estimates of the dynamic model	DYNAMIC
DynamicSeasonGraph	Schematic representation of the seasonal dummies of the dynamic model	DYNAMIC
DynamicXLagCoef	Dependent coefficients of the dynamic model	DYNAMIC
Hypothesis	Hypothesis of different deterministic terms in cointegration rank test	JOHANSEN=
HypothesisTest	Test hypothesis of different deterministic terms in cointegration rank test	JOHANSEN=
EigenvalueI2	Eigenvalues in integrated order 2	JOHANSEN= (IORDER=2)
Eta	η coefficients	JOHANSEN= (IORDER=2)
InfiniteARRepresent	Infinite order ar representation	IARR
InfoCriteria	Information criteria	default
LinearTrend	Linear trend estimates	TREND=
MACoef	MA coefficients	Q=
MARoots	Roots of MA characteristic polynomial	ROOTS with Q=
MaxTest	Cointegration rank test using the maximum eigenvalue	JOHANSEN= (TYPE=MAX)
Minic	Tentative order selection	MINIC MINIC=
ModelType	Type of model	default
NObs	Number of observations	default
OrthoImpulse	Orthogonalized impulse response matrices	IMPULSE=(ORTH) IMPULSE=(ALL)
OrthoImpulsebyVar	Orthogonalized impulse response by variable	IMPULSE=(ORTH) IMPULSE=(ALL)
ParameterEstimates	Parameter estimates table	default
ParameterGraph	Schematic representation of the parameters	PRINT=ESTIMATES
PartialAR	Partial autoregression matrices	PARCOEF
PartialARGraph	Schematic representation of partial autoregression	PARCOEF
PartialCanCorr	Partial canonical correlation analysis	PCANCORR
PartialCorr	Partial cross-correlation matrices	PCORR
PartialCorrbyVar	Partial cross-correlations by variable	PCORR

Table 35.8 *continued*

ODS Table Name	Description	Option
PartialCorrGraph	Schematic representation of partial cross-correlations	PCORR
PortmanteauTest	Chi-square test table for residual cross-correlations	PRINT=DIAGNOSE
ProportionCov- PredictError	Proportions of prediction error covariance decomposition	DECOMPOSE
ProportionCov- PredictErrorbyVar	Proportions of prediction error covariance decomposition by variable	DECOMPOSE
RankTestI2	Cointegration rank test in integrated order 2	JOHANSEN=(IORDER=2)
RestrictMaxTest	Cointegration rank test using the maximum eigenvalue under the restriction of a deterministic term	JOHANSEN=(TYPE=MAX) without NOINT
RestrictTraceTest	Cointegration rank test using the trace under the restriction of a deterministic term	JOHANSEN=(TYPE=TRACE) without NOINT
QuadTrend	Quadratic trend estimates	TREND=QUAD
SeasonGraph	Schematic representation of the seasonal dummies	PRINT=ESTIMATES
SConstant	Seasonal constant estimates	NSEASON=
SimpleImpulse	Impulse response matrices	IMPULSE=(SIMPLE) IMPULSE=(ALL)
SimpleImpulsebyVar	Impulse response by variable	IMPULSE=(SIMPLE) IMPULSE=(ALL)
SimpleImpulseX	Impulse response matrices of transfer function	IMPULSX=(SIMPLE) IMPULSX=(ALL)
SimpleImpulseXbyVar	Impulse response of transfer function by variable	IMPULSX=(SIMPLE) IMPULSX=(ALL)
Summary	Simple summary statistics	default
SWTest	Common trends test	SW=
TraceTest	Cointegration rank test using the trace	JOHANSEN=(TYPE=TRACE)
Xi	ξ coefficient matrix	JOHANSEN=(IORDER=2)
XLagCoef	Dependent coefficients	XLAG=
YWEstimates	Yule-Walker estimates	YW

ODS Tables Created by the GARCH Statement

ARCHCoef	ARCH coefficients	Q=
GARCHCoef	GARCH coefficients	P=
GARCHConstant	GARCH constant estimates	PRINT=ESTIMATES
GARCHParameter-Estimates	GARCH parameter estimates table	default

Table 35.8 *continued*

ODS Table Name	Description	Option
GARCHParameter-Graph	Schematic representation of the garch parameters	PRINT=ESTIMATES
GARCHRoots	Roots of GARCH characteristic polynomial	ROOTS

ODS Tables Created by the COINTEG Statement or the ECM option

AlphaInECM	α coefficients when rank= r	PRINT=ESTIMATES
AlphaBetaInECM	$\Pi = \alpha\beta'$ coefficients when rank= r	PRINT=ESTIMATES
AlphaOnAlpha	α coefficients under the restriction of α	J=
AlphaOnBeta	α coefficients under the restriction of β	H=
AlphaTestResults	Hypothesis testing of β	J=
BetaInECM	β coefficients when rank= r	PRINT=ESTIMATES
BetaOnBeta	β coefficients under the restriction of β	H=
BetaOnAlpha	β coefficients under the restriction of α	J=
BetaTestResults	Hypothesis testing of β	H=
GrangerRepresent	Coefficient of Granger representation	PRINT=ESTIMATES
HMatrix	Restriction matrix for β	H=
JMatrix	Restriction matrix for α	J=
WeakExogeneity	Testing weak exogeneity of each dependent variable with respect to BETA	EXOGENEITY

ODS Tables Created by the CAUSAL Statement

CausalityTest	Granger causality test	default
GroupVars	Two groups of variables	default

ODS Tables Created by the RESTRICT Statement

Restrict	Restriction table	default
----------	-------------------	---------

ODS Tables Created by the TEST Statement

Test	Wald test	default
------	-----------	---------

ODS Tables Created by the OUTPUT Statement

Forecasts	Forecasts table	without NOPRINT
-----------	-----------------	-----------------

Note that the ODS table names suffixed by “byVar” can be obtained with the PRINTFORM=UNIVARIATE option.

ODS Graphics

This section describes the use of ODS for creating statistical graphs with the VARMAX procedure.

When ODS GRAPHICS are in effect, the VARMAX procedure produces a variety of plots for each dependent variable.

The plots available are as follows:

- The procedure displays the following plots for each dependent variable in the MODEL statement with the PLOT= option in the VARMAX statement:
 - impulse response function
 - impulse response of the transfer function
 - time series and predicted series
 - prediction errors
 - distribution of the prediction errors
 - normal quantile of the prediction errors
 - ACF of the prediction errors
 - PACF of the prediction errors
 - IACF of the prediction errors
 - log scaled white noise test of the prediction errors
- The procedure displays forecast plots for each dependent variable in the OUTPUT statement with the PLOT= option in the VARMAX statement.

ODS Graph Names

The VARMAX procedure assigns a name to each graph it creates by using ODS. You can use these names to reference the graphs when using ODS. The names are listed in [Table 35.9](#).

Table 35.9 ODS Graphics Produced in the VARMAX Procedure

ODS Table Name	Plot Description	Statement
ErrorACFPlot	Autocorrelation function of prediction errors	MODEL
ErrorIACFPlot	Inverse autocorrelation function of prediction errors	MODEL
ErrorPACFPlot	Partial autocorrelation function of prediction errors	MODEL
ErrorDiagnosticsPanel	Diagnostics of prediction errors	MODEL
ErrorNormalityPanel	Histogram and Q-Q plot of prediction errors	MODEL
ErrorDistribution	Distribution of prediction errors	MODEL

Table 35.9 *continued*

ODS Table Name	Plot Description	Statement
ErrorQQPlot	Q-Q plot of prediction errors	MODEL
ErrorWhiteNoisePlot	White noise test of prediction errors	MODEL
ErrorPlot	Prediction errors	MODEL
ModelPlot	Time series and predicted series	MODEL
AccumulatedIRFPanel	Accumulated impulse response function	MODEL
AccumulatedIRFXPanel	Accumulated impulse response of transfer function	MODEL
OrthogonalIRFPanel	Orthogonalized impulse response function	MODEL
SimpleIRFPanel	Simple impulse response function	MODEL
SimpleIRFXPanel	Simple impulse response of transfer function	MODEL
ModelForecastsPlot	Time series and forecasts	OUTPUT
ForecastsOnlyPlot	Forecasts	OUTPUT

Computational Issues

Computational Method

The VARMAX procedure uses numerous linear algebra routines and frequently uses the sweep operator (Goodnight 1979) and the Cholesky root (Golub and Van Loan 1983).

In addition, the VARMAX procedure uses the nonlinear optimization (NLO) subsystem to perform nonlinear optimization tasks for the maximum likelihood estimation. The optimization requires intensive computation.

Convergence Problems

For some data sets, the computation algorithm can fail to converge. Nonconvergence can result from a number of causes, including flat or ridged likelihood surfaces and ill-conditioned data.

If you experience convergence problems, the following points might be helpful:

- Data that contain extreme values can affect results in PROC VARMAX. Rescaling the data can improve stability.
- Changing the TECH=, MAXITER=, and MAXFUNC= options in the [NLOPTIONS](#) statement can improve the stability of the optimization process.
- Specifying a different model that might fit the data more closely and might improve convergence.

Memory

Let T be the length of each series, k be the number of dependent variables, p be the order of autoregressive terms, and q be the order of moving-average terms. The number of parameters to estimate for a VARMA(p, q) model is

$$k + (p + q)k^2 + k * (k + 1)/2$$

As k increases, the number of parameters to estimate increases very quickly. Furthermore the memory requirement for VARMA(p, q) quadratically increases as k and T increase.

For a VARMAX(p, q, s) model and GARCH-type multivariate conditional heteroscedasticity models, the number of parameters to estimate and the memory requirements are considerable.

Computing Time

PROC VARMAX is computationally intensive, and execution times can be long. Extensive CPU time is often required to compute the maximum likelihood estimates.

Examples: VARMAX Procedure

Example 35.1: Analysis of U.S. Economic Variables

Consider the following four-dimensional system of U.S. economic variables. Quarterly data for the years 1954 to 1987 are used (Lütkepohl 1993, Table E.3.).

```

title 'Analysis of U.S. Economic Variables';
data us_money;
    date=intnx( 'qtr', '01jan54'd, _n_-1 );
    format date yyq. ;
    input y1 y2 y3 y4 @@;
    y1=log(y1);
    y2=log(y2);
    label y1='log(real money stock M1)'
          y2='log(GNP in bil. of 1982 dollars)'
          y3='Discount rate on 91-day T-bills'
          y4='Yield on 20-year Treasury bonds';
datalines;
450.9 1406.8 0.010800000 0.026133333
453.0 1401.2 0.0081333333 0.025233333

... more lines ...

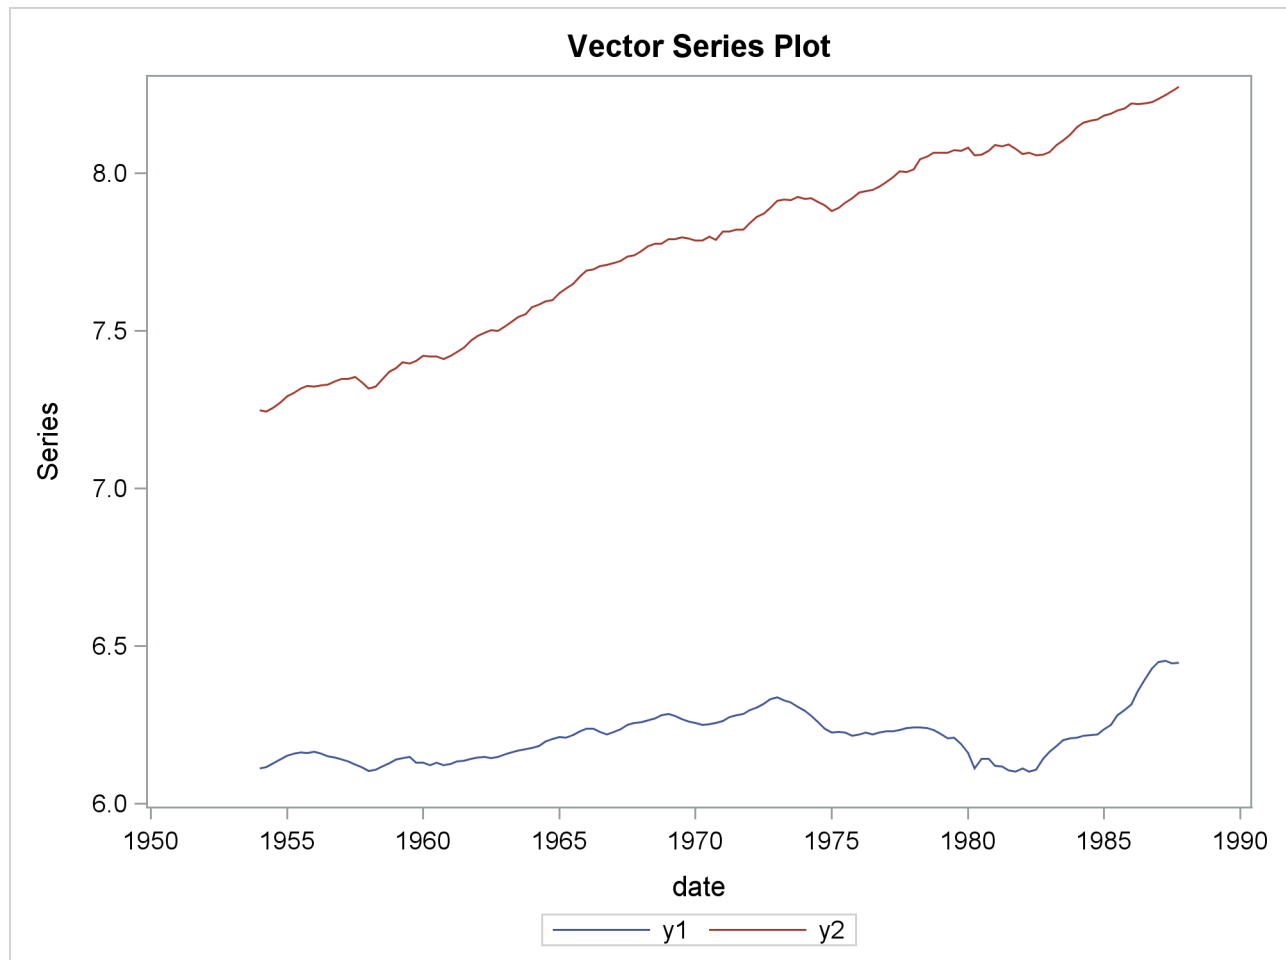
```

The following statements plot the series and proceed with the VARMAX procedure.

```
proc timeseries data=us_money vectorplot=series;
  id date interval=qtr;
  var y1 y2;
run;
```

Output 35.1.1 shows the plot of the variables y1 and y2.

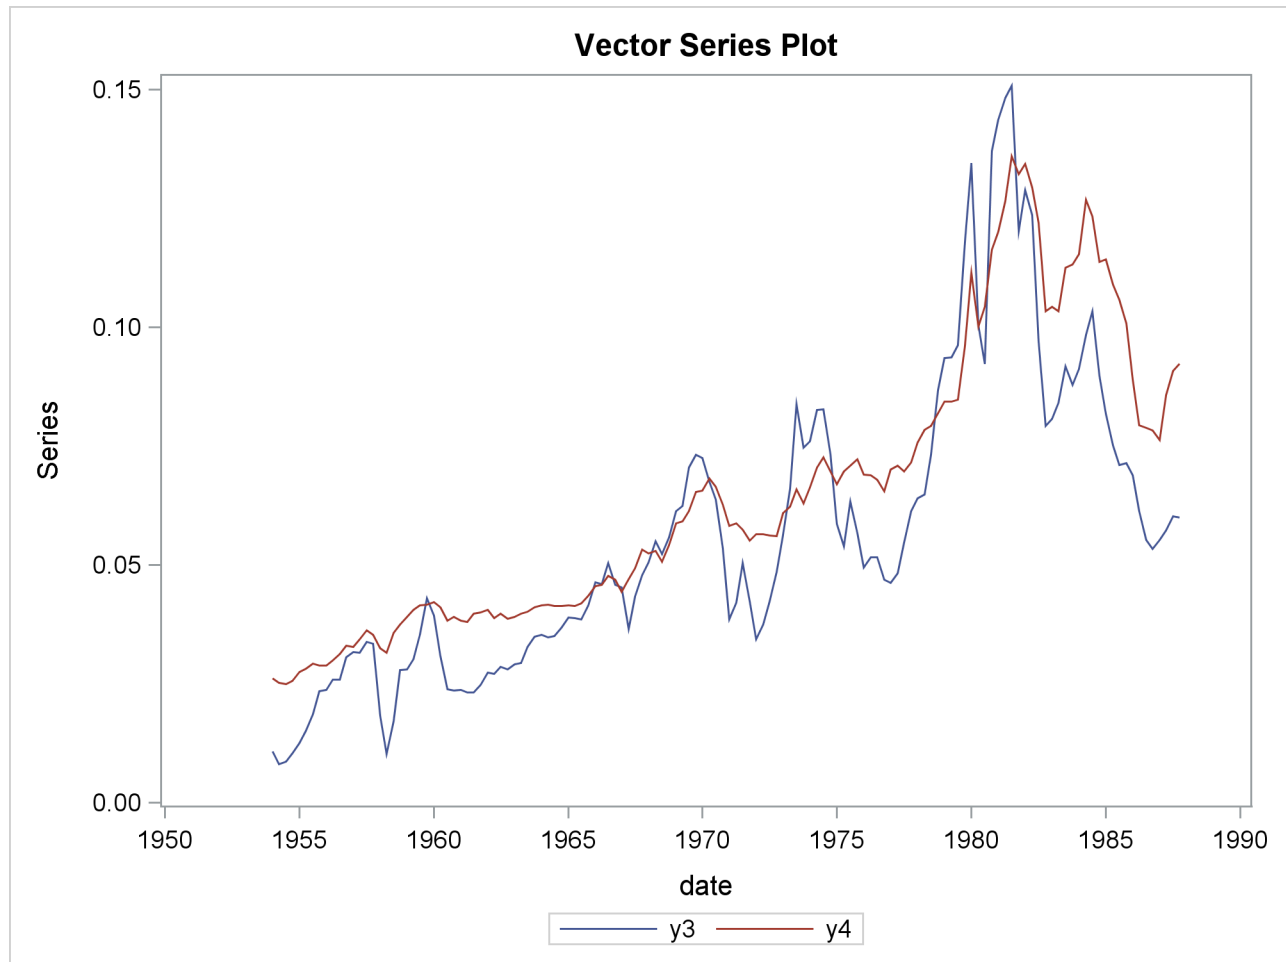
Output 35.1.1 Plot of Data



The following statements plot the variables y3 and y4.

```
proc timeseries data=us_money vectorplot=series;
  id date interval=qtr;
  var y3 y4;
run;
```

Output 35.1.2 shows the plot of the variables y3 and y4.

Output 35.1.2 Plot of Data

```
proc varmax data=us_money;
  id date interval=qtr;
  model y1-y4 / p=2 lagmax=6 dfest
    print=(iarr(3) estimates diagnose)
    cointtest=(johansen=(iorder=2))
    ecm=(rank=1 normalize=y1);
  cointeg rank=1 normalize=y1 exogeneity;
run;
```

This example performs the Dickey-Fuller test for stationarity, the Johansen cointegrated test integrated order 2, and the exogeneity test. The VECM(2) is fit to the data. From the outputs shown in [Output 35.1.5](#), you can see that the series has unit roots and is cointegrated in rank 1 with integrated order 1. The fitted

VECM(2) is given as

$$\Delta \mathbf{y}_t = \begin{pmatrix} 0.0408 \\ 0.0860 \\ 0.0052 \\ -0.0144 \end{pmatrix} + \begin{pmatrix} -0.0140 & 0.0065 & -0.2026 & 0.1306 \\ -0.0281 & 0.0131 & -0.4080 & 0.2630 \\ -0.0022 & 0.0010 & -0.0312 & 0.0201 \\ 0.0051 & -0.0024 & 0.0741 & -0.0477 \end{pmatrix} \mathbf{y}_{t-1} + \begin{pmatrix} 0.3460 & 0.0913 & -0.3535 & -0.9690 \\ 0.0994 & 0.0379 & 0.2390 & 0.2866 \\ 0.1812 & 0.0786 & 0.0223 & 0.4051 \\ 0.0322 & 0.0496 & -0.0329 & 0.1857 \end{pmatrix} \Delta \mathbf{y}_{t-1} + \boldsymbol{\epsilon}_t$$

The Δ prefixed to a variable name implies differencing.

Output 35.1.3 through Output 35.1.14 show the details. Output 35.1.3 shows the descriptive statistics.

Output 35.1.3 Descriptive Statistics

Analysis of U.S. Economic Variables						
The VARMAX Procedure						
		Number of Observations		136		
		Number of Pairwise Missing		0		
Simple Summary Statistics						
Variable Type		N	Mean	Standard Deviation	Min	Max
y1	Dependent	136	6.21295	0.07924	6.10278	6.45331
y2	Dependent	136	7.77890	0.30110	7.24508	8.27461
y3	Dependent	136	0.05608	0.03109	0.00813	0.15087
y4	Dependent	136	0.06458	0.02927	0.02490	0.13600
Simple Summary Statistics						
Variable Label						
y1	log(real money stock M1)					
y2	log(GNP in bil. of 1982 dollars)					
y3	Discount rate on 91-day T-bills					
y4	Yield on 20-year Treasury bonds					

Output 35.1.4 shows the output for Dickey-Fuller tests for the nonstationarity of each series. The null hypotheses is to test a unit root. All series have a unit root.

Output 35.1.4 Unit Root Tests

Unit Root Test					
Variable	Type	Rho	Pr < Rho	Tau	Pr < Tau
y1	Zero Mean	0.05	0.6934	1.14	0.9343
	Single Mean	-2.97	0.6572	-0.76	0.8260
	Trend	-5.91	0.7454	-1.34	0.8725
y2	Zero Mean	0.13	0.7124	5.14	0.9999
	Single Mean	-0.43	0.9309	-0.79	0.8176
	Trend	-9.21	0.4787	-2.16	0.5063
y3	Zero Mean	-1.28	0.4255	-0.69	0.4182
	Single Mean	-8.86	0.1700	-2.27	0.1842
	Trend	-18.97	0.0742	-2.86	0.1803
y4	Zero Mean	0.40	0.7803	0.45	0.8100
	Single Mean	-2.79	0.6790	-1.29	0.6328
	Trend	-12.12	0.2923	-2.33	0.4170

The Johansen cointegration rank test shows whether the series is integrated order either 1 or 2 as shown in [Output 35.1.5](#). The last two columns in [Output 35.1.5](#) explain the cointegration rank test with integrated order 1. The results indicate that there is the cointegrated relationship with the cointegration rank 1 with respect to the 0.05 significance level because the test statistic of 20.6542 is smaller than the critical value of 29.38. Now, look at the row associated with $r = 1$. Compare the test statistic value and critical value pairs such as (219.62395, 29.38), (89.21508, 15.34), and (27.32609, 3.84). There is no evidence that the series are integrated order 2 at the 0.05 significance level.

Output 35.1.5 Cointegration Rank Test

Cointegration Rank Test for I(2)					
r\k-r-s	4	3	2	1	Trace of I(1)
0	384.60903	214.37904	107.93782	37.02523	55.9633
1		219.62395	89.21508	27.32609	20.6542
2			73.61779	22.13279	2.6477
3				38.29435	0.0149
5% CV I(2)	47.21000	29.38000	15.34000	3.84000	
Cointegration Rank Test for I(2)					
r\k-r-s	5% CV of I(1)				
0	47.21				
1	29.38				
2	15.34				
3	3.84				
5% CV I(2)					

Output 35.1.6 shows the estimates of the long-run parameter, β , and the adjustment coefficient, α .

Output 35.1.6 Cointegration Rank Test Continued

Beta				
Variable	1	2	3	4
y1	1.00000	1.00000	1.00000	1.00000
y2	-0.46458	-0.63174	-0.69996	-0.16140
y3	14.51619	-1.29864	1.37007	-0.61806
y4	-9.35520	7.53672	2.47901	1.43731

Alpha				
Variable	1	2	3	4
y1	-0.01396	0.01396	-0.01119	0.00008
y2	-0.02811	-0.02739	-0.00032	0.00076
y3	-0.00215	-0.04967	-0.00183	-0.00072
y4	0.00510	-0.02514	-0.00220	0.00016

Output 35.1.7 shows the estimates η and ξ .

Output 35.1.7 Cointegration Rank Test Continued

Eta				
Variable	1	2	3	4
y1	52.74907	41.74502	-20.80403	55.77415
y2	-49.10609	-9.40081	98.87199	22.56416
y3	68.29674	-144.83173	-27.35953	15.51142
y4	121.25932	271.80496	85.85156	-130.11599

Xi				
Variable	1	2	3	4
y1	-0.00842	-0.00052	-0.00208	-0.00250
y2	0.00141	0.00213	-0.00736	-0.00058
y3	-0.00445	0.00541	-0.00150	0.00310
y4	-0.00211	-0.00064	-0.00130	0.00197

Output 35.1.8 shows that the VECM(2) is fit to the data. The ECM=(RANK=1) option produces the estimates of the long-run parameter, β , and the adjustment coefficient, α .

Output 35.1.8 Parameter Estimates

Analysis of U.S. Economic Variables		
The VARMAX Procedure		
Type of Model	VECM(2)	
Estimation Method	Maximum Likelihood Estimation	
Cointegrated Rank	1	
Beta		
Variable	1	
y1	1.00000	
y2	-0.46458	
y3	14.51619	
y4	-9.35520	
Alpha		
Variable	1	
y1	-0.01396	
y2	-0.02811	
y3	-0.00215	
y4	0.00510	

Output 35.1.9 shows the parameter estimates in terms of the constant, the lag one coefficients (\mathbf{y}_{t-1}) contained in the $\alpha\beta'$ estimates, and the coefficients associated with the lag one first differences ($\Delta\mathbf{y}_{t-1}$).

Output 35.1.9 Parameter Estimates Continued

Constant					
		Variable	Constant		
		y1	0.04076		
		y2	0.08595		
		y3	0.00518		
		y4	-0.01438		
Parameter Alpha * Beta' Estimates					
Variable		y1	y2	y3	y4
y1		-0.01396	0.00648	-0.20263	0.13059
y2		-0.02811	0.01306	-0.40799	0.26294
y3		-0.00215	0.00100	-0.03121	0.02011
y4		0.00510	-0.00237	0.07407	-0.04774
AR Coefficients of Differenced Lag					
DIF Lag	Variable	y1	y2	y3	y4
1	y1	0.34603	0.09131	-0.35351	-0.96895
	y2	0.09936	0.03791	0.23900	0.28661
	y3	0.18118	0.07859	0.02234	0.40508
	y4	0.03222	0.04961	-0.03292	0.18568

Output 35.1.10 shows the parameter estimates and their significance.

Output 35.1.10 Parameter Estimates Continued

Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
D_y1	CONST1	0.04076	0.01418	2.87	0.0048	1
	AR1_1_1	-0.01396	0.00495			y1 (t-1)
	AR1_1_2	0.00648	0.00230			y2 (t-1)
	AR1_1_3	-0.20263	0.07191			y3 (t-1)
	AR1_1_4	0.13059	0.04634			y4 (t-1)
	AR2_1_1	0.34603	0.06414	5.39	0.0001	D_y1 (t-1)
	AR2_1_2	0.09131	0.07334	1.25	0.2154	D_y2 (t-1)
	AR2_1_3	-0.35351	0.11024	-3.21	0.0017	D_y3 (t-1)
D_y2	AR2_1_4	-0.96895	0.20737	-4.67	0.0001	D_y4 (t-1)
	CONST2	0.08595	0.01679	5.12	0.0001	1
	AR1_2_1	-0.02811	0.00586			y1 (t-1)
	AR1_2_2	0.01306	0.00272			y2 (t-1)
	AR1_2_3	-0.40799	0.08514			y3 (t-1)
	AR1_2_4	0.26294	0.05487			y4 (t-1)
	AR2_2_1	0.09936	0.07594	1.31	0.1932	D_y1 (t-1)
	AR2_2_2	0.03791	0.08683	0.44	0.6632	D_y2 (t-1)
D_y3	AR2_2_3	0.23900	0.13052	1.83	0.0695	D_y3 (t-1)
	AR2_2_4	0.28661	0.24552	1.17	0.2453	D_y4 (t-1)
	CONST3	0.00518	0.01608	0.32	0.7476	1
	AR1_3_1	-0.00215	0.00562			y1 (t-1)
	AR1_3_2	0.00100	0.00261			y2 (t-1)
	AR1_3_3	-0.03121	0.08151			y3 (t-1)
	AR1_3_4	0.02011	0.05253			y4 (t-1)
	AR2_3_1	0.18118	0.07271	2.49	0.0140	D_y1 (t-1)
D_y4	AR2_3_2	0.07859	0.08313	0.95	0.3463	D_y2 (t-1)
	AR2_3_3	0.02234	0.12496	0.18	0.8584	D_y3 (t-1)
	AR2_3_4	0.40508	0.23506	1.72	0.0873	D_y4 (t-1)
	CONST4	-0.01438	0.00803	-1.79	0.0758	1
	AR1_4_1	0.00510	0.00281			y1 (t-1)
	AR1_4_2	-0.00237	0.00130			y2 (t-1)
	AR1_4_3	0.07407	0.04072			y3 (t-1)
	AR1_4_4	-0.04774	0.02624			y4 (t-1)
	AR2_4_1	0.03222	0.03632	0.89	0.3768	D_y1 (t-1)
	AR2_4_2	0.04961	0.04153	1.19	0.2345	D_y2 (t-1)
	AR2_4_3	-0.03292	0.06243	-0.53	0.5990	D_y3 (t-1)
	AR2_4_4	0.18568	0.11744	1.58	0.1164	D_y4 (t-1)

Output 35.1.11 shows the innovation covariance matrix estimates, the various information criteria results, and the tests for white noise residuals. The residuals have significant correlations at lag 2 and 3. The Portmanteau test results into significant. These results show that a VECM(3) model might be better fit than the VECM(2) model is.

Output 35.1.11 Diagnostic Checks

Covariances of Innovations				
Variable	y1	y2	y3	y4
y1	0.00005	0.00001	-0.00001	-0.00000
y2	0.00001	0.00007	0.00002	0.00001
y3	-0.00001	0.00002	0.00007	0.00002
y4	-0.00000	0.00001	0.00002	0.00002

Information Criteria	
AICC	-40.6284
HQC	-40.4343
AIC	-40.6452
SBC	-40.1262
FPEC	2.23E-18

Schematic Representation of Cross Correlations of Residuals							
Variable/ Lag	0	1	2	3	4	5	6
y1	++..	++..	+...	..--
y2	++++
y3	.+++	+.-.	..++	-...
y4	.++++.

+ is > 2*std error, - is < -2*std error, . is between

Portmanteau Test for Cross Correlations of Residuals			
Up To Lag	DF	Chi-Square	Pr > ChiSq
3	16	53.90	<.0001
4	32	74.03	<.0001
5	48	103.08	<.0001
6	64	116.94	<.0001

Output 35.1.12 describes how well each univariate equation fits the data. The residuals for y_3 and y_4 are off from the normality. Except the residuals for y_3 , there are no AR effects on other residuals. Except the residuals for y_4 , there are no ARCH effects on other residuals.

Output 35.1.12 Diagnostic Checks Continued

Univariate Model ANOVA Diagnostics					
Variable	R-Square	Standard Deviation	F Value	Pr > F	
y1	0.6754	0.00712	32.51	<.0001	
y2	0.3070	0.00843	6.92	<.0001	
y3	0.1328	0.00807	2.39	0.0196	
y4	0.0831	0.00403	1.42	0.1963	

Univariate Model White Noise Diagnostics					
Variable	Durbin Watson	Normality		ARCH	
		Chi-Square	Pr > ChiSq	F Value	Pr > F
y1	2.13418	7.19	0.0275	1.62	0.2053
y2	2.04003	1.20	0.5483	1.23	0.2697
y3	1.86892	253.76	<.0001	1.78	0.1847
y4	1.98440	105.21	<.0001	21.01	<.0001

Univariate Model AR Diagnostics								
Variable	AR1		AR2		AR3		AR4	
	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F
y1	0.68	0.4126	2.98	0.0542	2.01	0.1154	2.48	0.0473
y2	0.05	0.8185	0.12	0.8842	0.41	0.7453	0.30	0.8762
y3	0.56	0.4547	2.86	0.0610	4.83	0.0032	3.71	0.0069
y4	0.01	0.9340	0.16	0.8559	1.21	0.3103	0.95	0.4358

The PRINT=(IARR) option provides the VAR(2) representation in [Output 35.1.13](#).

Output 35.1.13 Infinite Order AR Representation

Infinite Order AR Representation					
Lag	Variable	y1	y2	y3	y4
1	y1	1.33208	0.09780	-0.55614	-0.83836
	y2	0.07125	1.05096	-0.16899	0.54955
	y3	0.17903	0.07959	0.99113	0.42520
	y4	0.03732	0.04724	0.04116	1.13795
2	y1	-0.34603	-0.09131	0.35351	0.96895
	y2	-0.09936	-0.03791	-0.23900	-0.28661
	y3	-0.18118	-0.07859	-0.02234	-0.40508
	y4	-0.03222	-0.04961	0.03292	-0.18568
3	y1	0.00000	0.00000	0.00000	0.00000
	y2	0.00000	0.00000	0.00000	0.00000
	y3	0.00000	0.00000	0.00000	0.00000
	y4	0.00000	0.00000	0.00000	0.00000

[Output 35.1.14](#) shows whether each variable is the weak exogeneity of other variables. The variable y1 is not the weak exogeneity of other variables, y2, y3, and y4; the variable y2 is not the weak exogeneity of other variables, y1, y3, and y4; the variable y3 and y4 are the weak exogeneity of other variables.

Output 35.1.14 Weak Exogeneity Test

Testing Weak Exogeneity of Each Variables				
Variable	DF	Chi-Square	Pr > ChiSq	
y1	1	6.55	0.0105	
y2	1	12.54	0.0004	
y3	1	0.09	0.7695	
y4	1	1.81	0.1786	

Example 35.2: Analysis of German Economic Variables

This example considers a three-dimensional VAR(2) model. The model contains the logarithms of a quarterly, seasonally adjusted West German fixed investment, disposable income, and consumption expenditures. The data used are in Lütkepohl (1993, Table E.1).

```

title 'Analysis of German Economic Variables';
data west;
    date = intnx( 'qtr', '01jan60'd, _n_-1 );
    format date yyq. ;
    input y1 y2 y3 @@;
    y1 = log(y1);
    y2 = log(y2);
    y3 = log(y3);
    label y1 = 'logarithm of investment'
           y2 = 'logarithm of income'
           y3 = 'logarithm of consumption';
datalines;
180 451 415 179 465 421 185 485 434 192 493 448

... more lines ...

data use;
    set west;
    where date < '01jan79'd;
    keep date y1 y2 y3;
run;

proc varmax data=use;
    id date interval=qtr;
    model y1-y3 / p=2 dify=(1)
           print=(decompose(6) impulse=(stderr) estimates diagnose)
           printform=both lagmax=3;
    causal group1=(y1) group2=(y2 y3);
    output lead=5;
run;

```

First, the differenced data is modeled as a VAR(2) with the following result:

$$\begin{aligned}
 \Delta \mathbf{y}_t = & \begin{pmatrix} -0.01672 \\ 0.01577 \\ 0.01293 \end{pmatrix} + \begin{pmatrix} -0.31963 & 0.14599 & 0.96122 \\ 0.04393 & -0.15273 & 0.28850 \\ -0.00242 & 0.22481 & -0.26397 \end{pmatrix} \Delta \mathbf{y}_{t-1} \\
 & + \begin{pmatrix} -0.16055 & 0.11460 & 0.93439 \\ 0.05003 & 0.01917 & -0.01020 \\ 0.03388 & 0.35491 & -0.02223 \end{pmatrix} \Delta \mathbf{y}_{t-2} + \boldsymbol{\epsilon}_t
 \end{aligned}$$

The parameter estimates AR1_1_2, AR1_1_3, AR2_1_2, and AR2_1_3 are insignificant, and the VARX model is fitted in the next step.

The detailed output is shown in [Output 35.2.1](#) through [Output 35.2.8](#).

[Output 35.2.1](#) shows the descriptive statistics.

Output 35.2.1 Descriptive Statistics

Analysis of German Economic Variables						
The VARMAX Procedure						
Number of Observations		75				
Number of Pairwise Missing		0				
Observation(s) eliminated by differencing		1				
Simple Summary Statistics						
Variable Type		N	Mean	Standard Deviation	Min	Max
y1	Dependent	75	0.01811	0.04680	-0.14018	0.19358
y2	Dependent	75	0.02071	0.01208	-0.02888	0.05023
y3	Dependent	75	0.01987	0.01040	-0.01300	0.04483
Simple Summary Statistics						
Variable Difference			Label			
y1		1	logarithm of investment			
y2		1	logarithm of income			
y3		1	logarithm of consumption			

Output 35.2.2 shows that a VAR(2) model is fit to the data.

Output 35.2.2 Parameter Estimates

Analysis of German Economic Variables				
The VARMAX Procedure				
Type of Model			VAR(2)	
Estimation Method		Least Squares Estimation		
Constant				
	Variable	Constant		
	y1	-0.01672		
	y2	0.01577		
	y3	0.01293		
AR				
Lag	Variable	y1	y2	y3
1	y1	-0.31963	0.14599	0.96122
	y2	0.04393	-0.15273	0.28850
	y3	-0.00242	0.22481	-0.26397
2	y1	-0.16055	0.11460	0.93439
	y2	0.05003	0.01917	-0.01020
	y3	0.03388	0.35491	-0.02223

Output 35.2.3 shows the parameter estimates and their significance.

Output 35.2.3 Parameter Estimates Continued

Schematic Representation						
Variable/ Lag	C	AR1	AR2			
y1	.	-..	...			
y2	+			
y3	+	+. .	+. .			
+ is > 2*std error, -						
is < -2*std error, .						
is between, * is N/A						
Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y1	CONST1	-0.01672	0.01723	-0.97	0.3352	1
	AR1_1_1	-0.31963	0.12546	-2.55	0.0132	y1(t-1)
	AR1_1_2	0.14599	0.54567	0.27	0.7899	y2(t-1)
	AR1_1_3	0.96122	0.66431	1.45	0.1526	y3(t-1)
	AR2_1_1	-0.16055	0.12491	-1.29	0.2032	y1(t-2)
	AR2_1_2	0.11460	0.53457	0.21	0.8309	y2(t-2)
	AR2_1_3	0.93439	0.66510	1.40	0.1647	y3(t-2)
y2	CONST2	0.01577	0.00437	3.60	0.0006	1
	AR1_2_1	0.04393	0.03186	1.38	0.1726	y1(t-1)
	AR1_2_2	-0.15273	0.13857	-1.10	0.2744	y2(t-1)
	AR1_2_3	0.28850	0.16870	1.71	0.0919	y3(t-1)
	AR2_2_1	0.05003	0.03172	1.58	0.1195	y1(t-2)
	AR2_2_2	0.01917	0.13575	0.14	0.8882	y2(t-2)
	AR2_2_3	-0.01020	0.16890	-0.06	0.9520	y3(t-2)
y3	CONST3	0.01293	0.00353	3.67	0.0005	1
	AR1_3_1	-0.00242	0.02568	-0.09	0.9251	y1(t-1)
	AR1_3_2	0.22481	0.11168	2.01	0.0482	y2(t-1)
	AR1_3_3	-0.26397	0.13596	-1.94	0.0565	y3(t-1)
	AR2_3_1	0.03388	0.02556	1.33	0.1896	y1(t-2)
	AR2_3_2	0.35491	0.10941	3.24	0.0019	y2(t-2)
	AR2_3_3	-0.02223	0.13612	-0.16	0.8708	y3(t-2)

Output 35.2.4 shows the innovation covariance matrix estimates, the various information criteria results, and the tests for white noise residuals. The residuals are uncorrelated except at lag 3 for y2 variable.

Output 35.2.4 Diagnostic Checks

Covariances of Innovations				
Variable	y1	y2	y3	
y1	0.00213	0.00007	0.00012	
y2	0.00007	0.00014	0.00006	
y3	0.00012	0.00006	0.00009	
Information Criteria				
AICC	-24.4884			
HQC	-24.2869			
AIC	-24.5494			
SBC	-23.8905			
FPEC	2.18E-11			
Cross Correlations of Residuals				
Lag	Variable	y1	y2	y3
0	y1	1.00000	0.13242	0.28275
	y2	0.13242	1.00000	0.55526
	y3	0.28275	0.55526	1.00000
1	y1	0.01461	-0.00666	-0.02394
	y2	-0.01125	-0.00167	-0.04515
	y3	-0.00993	-0.06780	-0.09593
2	y1	0.07253	-0.00226	-0.01621
	y2	-0.08096	-0.01066	-0.02047
	y3	-0.02660	-0.01392	-0.02263
3	y1	0.09915	0.04484	0.05243
	y2	-0.00289	0.14059	0.25984
	y3	-0.03364	0.05374	0.05644
Schematic Representation of Cross Correlations of Residuals				
Variable/ Lag	0	1	2	3
y1	+.+
y2	.+++
y3	+++
+ is > 2*std error, - is < -2*std error, . is between				
Portmanteau Test for Cross Correlations of Residuals				
Up To Lag	DF	Chi-Square	Pr > ChiSq	
3	9	9.69	0.3766	

Output 35.2.5 describes how well each univariate equation fits the data. The residuals are off from the normality, but have no AR effects. The residuals for y1 variable have the ARCH effect.

Output 35.2.5 Diagnostic Checks Continued

Univariate Model ANOVA Diagnostics				
Variable	R-Square	Standard Deviation	F Value	Pr > F
y1	0.1286	0.04615	1.62	0.1547
y2	0.1142	0.01172	1.42	0.2210
y3	0.2513	0.00944	3.69	0.0032

Univariate Model White Noise Diagnostics					
Variable	Durbin	Normality		ARCH	
	Watson	Chi-Square	Pr > ChiSq	F Value	Pr > F
y1	1.96269	10.22	0.0060	12.39	0.0008
y2	1.98145	11.98	0.0025	0.38	0.5386
y3	2.14583	34.25	<.0001	0.10	0.7480

Univariate Model AR Diagnostics								
Variable	AR1		AR2		AR3		AR4	
	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F
y1	0.01	0.9029	0.19	0.8291	0.39	0.7624	1.39	0.2481
y2	0.00	0.9883	0.00	0.9961	0.46	0.7097	0.34	0.8486
y3	0.68	0.4129	0.38	0.6861	0.30	0.8245	0.21	0.9320

Output 35.2.6 is the output in a matrix format associated with the PRINT=(IMPULSE=) option for the impulse response function and standard errors. The y3 variable in the first row is an impulse variable. The y1 variable in the first column is a response variable. The numbers, 0.96122, 0.41555, -0.40789 at lag 1 to 3 are decreasing.

Output 35.2.6 Impulse Response Function

Simple Impulse Response by Variable				
Variable Response\Impulse	Lag	y1	y2	y3
y1	1	-0.31963	0.14599	0.96122
	STD	0.12546	0.54567	0.66431
	2	-0.05430	0.26174	0.41555
	STD	0.12919	0.54728	0.66311
	3	0.11904	0.35283	-0.40789
	STD	0.08362	0.38489	0.47867
y2	1	0.04393	-0.15273	0.28850
	STD	0.03186	0.13857	0.16870
	2	0.02858	0.11377	-0.08820
	STD	0.03184	0.13425	0.16250
	3	-0.00884	0.07147	0.11977
	STD	0.01583	0.07914	0.09462
y3	1	-0.00242	0.22481	-0.26397
	STD	0.02568	0.11168	0.13596
	2	0.04517	0.26088	0.10998
	STD	0.02563	0.10820	0.13101
	3	-0.00055	-0.09818	0.09096
	STD	0.01646	0.07823	0.10280

The proportions of decomposition of the prediction error covariances of three variables are given in Output 35.2.7. If you see the y3 variable in the first column, then the output explains that about 64.713% of the one-step-ahead prediction error covariances of the variable y_{3t} is accounted for by its own innovations, about 7.995% is accounted for by y_{1t} innovations, and about 27.292% is accounted for by y_{2t} innovations.

Output 35.2.7 Proportions of Prediction Error Covariance Decomposition

Proportions of Prediction Error Covariances by Variable				
Variable	Lead	y1	y2	y3
y1	1	1.00000	0.00000	0.00000
	2	0.95996	0.01751	0.02253
	3	0.94565	0.02802	0.02633
	4	0.94079	0.02936	0.02985
	5	0.93846	0.03018	0.03136
	6	0.93831	0.03025	0.03145
y2	1	0.01754	0.98246	0.00000
	2	0.06025	0.90747	0.03228
	3	0.06959	0.89576	0.03465
	4	0.06831	0.89232	0.03937
	5	0.06850	0.89212	0.03938
	6	0.06924	0.89141	0.03935
y3	1	0.07995	0.27292	0.64713
	2	0.07725	0.27385	0.64890
	3	0.12973	0.33364	0.53663
	4	0.12870	0.33499	0.53631
	5	0.12859	0.33924	0.53217
	6	0.12852	0.33963	0.53185

The table in [Output 35.2.8](#) gives forecasts and their prediction error covariances.

Output 35.2.8 Forecasts

Forecasts						
Variable	Obs	Time	Forecast	Standard Error	95% Confidence Limits	
y1	77	1979:1	6.54027	0.04615	6.44982	6.63072
	78	1979:2	6.55105	0.05825	6.43688	6.66522
	79	1979:3	6.57217	0.06883	6.43725	6.70708
	80	1979:4	6.58452	0.08021	6.42732	6.74173
	81	1980:1	6.60193	0.09117	6.42324	6.78063
y2	77	1979:1	7.68473	0.01172	7.66176	7.70770
	78	1979:2	7.70508	0.01691	7.67193	7.73822
	79	1979:3	7.72206	0.02156	7.67980	7.76431
	80	1979:4	7.74266	0.02615	7.69140	7.79392
	81	1980:1	7.76240	0.03005	7.70350	7.82130
y3	77	1979:1	7.54024	0.00944	7.52172	7.55875
	78	1979:2	7.55489	0.01282	7.52977	7.58001
	79	1979:3	7.57472	0.01808	7.53928	7.61015
	80	1979:4	7.59344	0.02205	7.55022	7.63666
	81	1980:1	7.61232	0.02578	7.56179	7.66286

Output 35.2.9 shows that you cannot reject Granger noncausality from (y2, y3) to y1 using the 0.05 significance level.

Output 35.2.9 Granger Causality Tests

Granger-Causality Wald Test			
Test	DF	Chi-Square	Pr > ChiSq
1	4	6.37	0.1734
Test 1: Group 1 Variables: y1			
Group 2 Variables: y2 y3			

The following SAS statements show that the variable y1 is the exogenous variable and fit the VARX(2,1) model to the data.

```
proc varmax data=use;
  id date interval=qtr;
  model y2 y3 = y1 / p=2 dify=(1) difx=(1) xlag=1 lagmax=3
    print=(estimates diagnose);
run;
```

The fitted VARX(2,1) model is written as

$$\begin{pmatrix} \Delta y_{2t} \\ \Delta y_{3t} \end{pmatrix} = \begin{pmatrix} 0.01542 \\ 0.01319 \end{pmatrix} + \begin{pmatrix} 0.02520 \\ 0.05130 \end{pmatrix} \Delta y_{1t} + \begin{pmatrix} 0.03870 \\ 0.00363 \end{pmatrix} \Delta y_{1,t-1} \\
 + \begin{pmatrix} -0.12258 & 0.25811 \\ 0.24367 & -0.31809 \end{pmatrix} \begin{pmatrix} \Delta y_{2,t-1} \\ \Delta y_{3,t-1} \end{pmatrix} \\
 + \begin{pmatrix} 0.01651 & 0.03498 \\ 0.34921 & -0.01664 \end{pmatrix} \begin{pmatrix} \Delta y_{2,t-2} \\ \Delta y_{3,t-2} \end{pmatrix} + \begin{pmatrix} \epsilon_{1t} \\ \epsilon_{2t} \end{pmatrix}$$

The detailed output is shown in [Output 35.2.10](#) through [Output 35.2.13](#).

Output 35.2.10 shows the parameter estimates in terms of the constant, the current and the lag one coefficients of the exogenous variable, and the lag two coefficients of the dependent variables.

Output 35.2.10 Parameter Estimates

Analysis of German Economic Variables				
The VARMAX Procedure				
Type of Model	VARX(2,1)			
Estimation Method	Least Squares Estimation			
Constant				
	Variable	Constant		
	y2	0.01542		
	y3	0.01319		
XLag				
	Lag	Variable	y1	
	0	y2	0.02520	
		y3	0.05130	
	1	y2	0.03870	
		y3	0.00363	
AR				
	Lag	Variable	y2	y3
	1	y2	-0.12258	0.25811
		y3	0.24367	-0.31809
	2	y2	0.01651	0.03498
		y3	0.34921	-0.01664

Output 35.2.11 shows the parameter estimates and their significance.

Output 35.2.11 Parameter Estimates Continued

Model Parameter Estimates						
Equation	Parameter	Estimate	Standard Error	t Value	Pr > t	Variable
y2	CONST1	0.01542	0.00443	3.48	0.0009	1
	XL0_1_1	0.02520	0.03130	0.81	0.4237	y1(t)
	XL1_1_1	0.03870	0.03252	1.19	0.2383	y1(t-1)
	AR1_1_1	-0.12258	0.13903	-0.88	0.3811	y2(t-1)
	AR1_1_2	0.25811	0.17370	1.49	0.1421	y3(t-1)
	AR2_1_1	0.01651	0.13766	0.12	0.9049	y2(t-2)
	AR2_1_2	0.03498	0.16783	0.21	0.8356	y3(t-2)
y3	CONST2	0.01319	0.00346	3.81	0.0003	1
	XL0_2_1	0.05130	0.02441	2.10	0.0394	y1(t)
	XL1_2_1	0.00363	0.02536	0.14	0.8868	y1(t-1)
	AR1_2_1	0.24367	0.10842	2.25	0.0280	y2(t-1)
	AR1_2_2	-0.31809	0.13546	-2.35	0.0219	y3(t-1)
	AR2_2_1	0.34921	0.10736	3.25	0.0018	y2(t-2)
	AR2_2_2	-0.01664	0.13088	-0.13	0.8992	y3(t-2)

Output 35.2.12 shows the innovation covariance matrix estimates, the various information criteria results, and the tests for white noise residuals. The residuals is uncorrelated except at lag 3 for y2 variable.

Output 35.2.12 Diagnostic Checks

Covariances of Innovations				
Variable	y2	y3		
y2	0.00014	0.00006		
y3	0.00006	0.00009		
Information Criteria				
AICC	-18.3902			
HQC	-18.2558			
AIC	-18.4309			
SBC	-17.9916			
FPEC	9.91E-9			
Cross Correlations of Residuals				
Lag	Variable	y2	y3	
0	y2	1.00000	0.56462	
	y3	0.56462	1.00000	
1	y2	-0.02312	-0.05927	
	y3	-0.07056	-0.09145	
2	y2	-0.02849	-0.05262	
	y3	-0.05804	-0.08567	
3	y2	0.16071	0.29588	
	y3	0.10882	0.13002	
Schematic Representation of Cross Correlations of Residuals				
Variable/ Lag	0	1	2	3
y2	+++
y3	++
+ is > 2*std error, - is < -2*std error, . is between				
Portmanteau Test for Cross Correlations of Residuals				
Up To Lag	DF	Chi-Square	Pr > ChiSq	
3	4	8.38	0.0787	

Output 35.2.13 describes how well each univariate equation fits the data. The residuals are off from the normality, but have no ARCH and AR effects.

Output 35.2.13 Diagnostic Checks Continued

Univariate Model ANOVA Diagnostics				
Variable	R-Square	Standard Deviation	F Value	Pr > F
y2	0.0897	0.01188	1.08	0.3809
y3	0.2796	0.00926	4.27	0.0011

Univariate Model White Noise Diagnostics					
Variable	Durbin	Normality		ARCH	
	Watson	Chi-Square	Pr > ChiSq	F Value	Pr > F
y2	2.02413	14.54	0.0007	0.49	0.4842
y3	2.13414	32.27	<.0001	0.08	0.7782

Univariate Model AR Diagnostics								
Variable	AR1		AR2		AR3		AR4	
	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F	F Value	Pr > F
y2	0.04	0.8448	0.04	0.9570	0.62	0.6029	0.42	0.7914
y3	0.62	0.4343	0.62	0.5383	0.72	0.5452	0.36	0.8379

Example 35.3: Numerous Examples

The following are examples of syntax for model fitting:

```
/* Data 'a' Generated Process */
proc iml;
  sig = {1.0 0.5, 0.5 1.25};
  phi = {1.2 -0.5, 0.6 0.3};
  call varmasim(y,phi) sigma = sig n = 100 seed = 46859;
  cn = {'y1' 'y2'};
  create a from y[colname=cn];
  append from y;
run;;

/* when the series has a linear trend */
proc varmax data=a;
  model y1 y2 / p=1 trend=linear;
run;

/* Fit subset of AR order 1 and 3 */
proc varmax data=a;
  model y1 y2 / p=(1,3);
run;

/* Check if the series is nonstationary */
proc varmax data=a;
  model y1 y2 / p=1 dfest print=(roots);
run;

/* Fit VAR(1) in differencing */
proc varmax data=a;
  model y1 y2 / p=1 dify=(1);
run;

/* Fit VAR(1) in seasonal differencing */
proc varmax data=a;
  model y1 y2 / p=1 dify=(4) lagmax=5;
run;

/* Fit VAR(1) in both regular and seasonal differencing */
proc varmax data=a;
  model y1 y2 / p=1 dify=(1,4) lagmax=5;
run;

/* Fit VAR(1) in different differencing */
proc varmax data=a;
  model y1 y2 / p=1 dif=(y1(1,4) y2(1)) lagmax=5;
run;

/* Options related to prediction */
proc varmax data=a;
  model y1 y2 / p=1 lagmax=3
```



```

                print=(impulse covpe(5) decompose(5));
run;

/* Options related to tentative order selection */
proc varmax data=a;
    model y1 y2 / p=1 lagmax=5 minic
        print=(parcoef pcancorr pcorr);
run;

/* Automatic selection of the AR order */
proc varmax data=a;
    model y1 y2 / minic=(type=aic p=5);
run;

/* Compare results of LS and Yule-Walker Estimators */
proc varmax data=a;
    model y1 y2 / p=1 print=(yw);
run;

/* BVAR(1) of the nonstationary series y1 and y2 */
proc varmax data=a;
    model y1 y2 / p=1
        prior=(lambda=1 theta=0.2 ivar);
run;

/* BVAR(1) of the nonstationary series y1 */
proc varmax data=a;
    model y1 y2 / p=1
        prior=(lambda=0.1 theta=0.15 ivar=(y1));
run;

/* Data 'b' Generated Process */
proc iml;
    sig = { 0.5  0.14 -0.08 -0.03,  0.14 0.71 0.16 0.1,
           -0.08 0.16  0.65  0.23, -0.03 0.1  0.23 0.16};
    sig = sig * 0.0001;
    phi = {1.2 -0.5 0.  0.1,  0.6 0.3 -0.2  0.5,
           0.4  0. -0.2 0.1, -1.0 0.2  0.7 -0.2};
    call varmasim(y,phi) sigma = sig n = 100 seed = 32567;
    cn = {'y1' 'y2' 'y3' 'y4'};
    create b from y[colname=cn];
    append from y;
quit;

/* Cointegration Rank Test using Trace statistics */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest;
run;

/* Cointegration Rank Test using Max statistics */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest=(johansen=(type=max));
run;

```

```

/* Common Trends Test using Filter(Differencing) statistics */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest=(sw);
run;

/* Common Trends Test using Filter(Residual) statistics */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest=(sw=(type=filtres lag=1));
run;

/* Common Trends Test using Kernel statistics */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest=(sw=(type=kernel lag=1));
run;

/* Cointegration Rank Test for I(2) */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 cointtest=(johansen=(iorder=2));
run;

/* Fit VECM(2) with rank=3 */
proc varmax data=b;
    model y1-y4 / p=2 lagmax=4 print=(roots iarr)
        ecm=(rank=3 normalize=y1);
run;

/* Weak Exogenous Testing for each variable */
proc varmax data=b outstat=bbb;
    model y1-y4 / p=2 lagmax=4
        ecm=(rank=3 normalize=y1);
    cointeg rank=3 exogeneity;
run;

/* Hypotheses Testing for long-run and adjustment parameter */
proc varmax data=b outstat=bbb;
    model y1-y4 / p=2 lagmax=4
        ecm=(rank=3 normalize=y1);
    cointeg rank=3 normalize=y1
        h=(1 0 0, 0 1 0, -1 0 0, 0 0 1)
        j=(1 0 0, 0 1 0, 0 0 1, 0 0 0);
run;

/* ordinary regression model */
proc varmax data=grunfeld;
    model y1 y2 = x1-x3;
run;

/* Ordinary regression model with subset lagged terms */
proc varmax data=grunfeld;
    model y1 y2 = x1 / xlag=(1,3);
run;

/* VARX(1,1) with no current time Exogenous Variables */
proc varmax data=grunfeld;

```

```

    model y1 y2 = x1 / p=1 xlag=1 nocurrentx;
run;

/* VARX(1,1) with different Exogenous Variables */
proc varmax data=grunfeld;
    model y1 = x3, y2 = x1 x2 / p=1 xlag=1;
run;

/* VARX(1,2) in difference with current Exogenous Variables */
proc varmax data=grunfeld;
    model y1 y2 = x1 / p=1 xlag=2 difx=(1) dify=(1);
run;

```

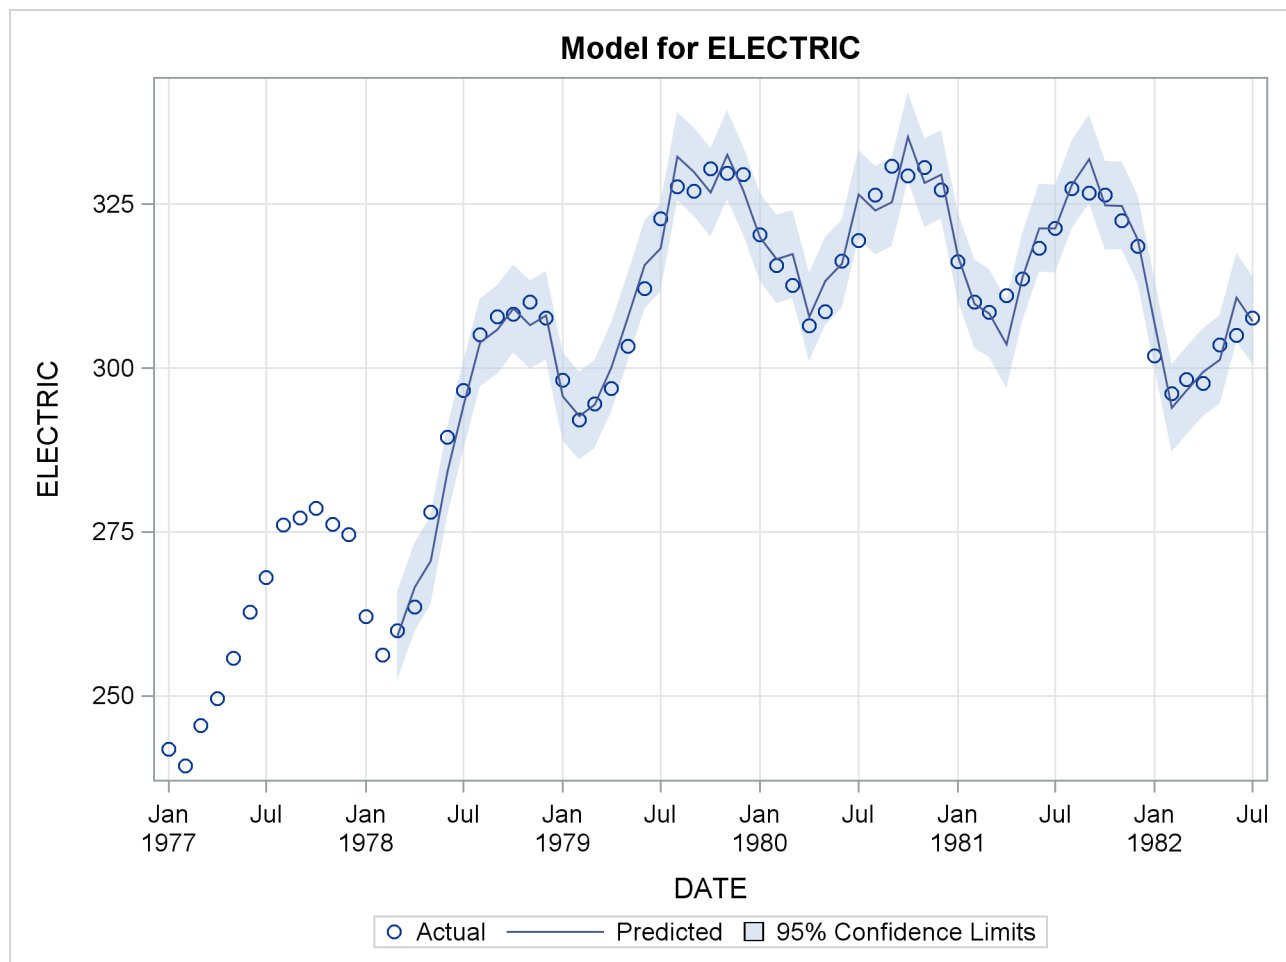
Example 35.4: Illustration of ODS Graphics

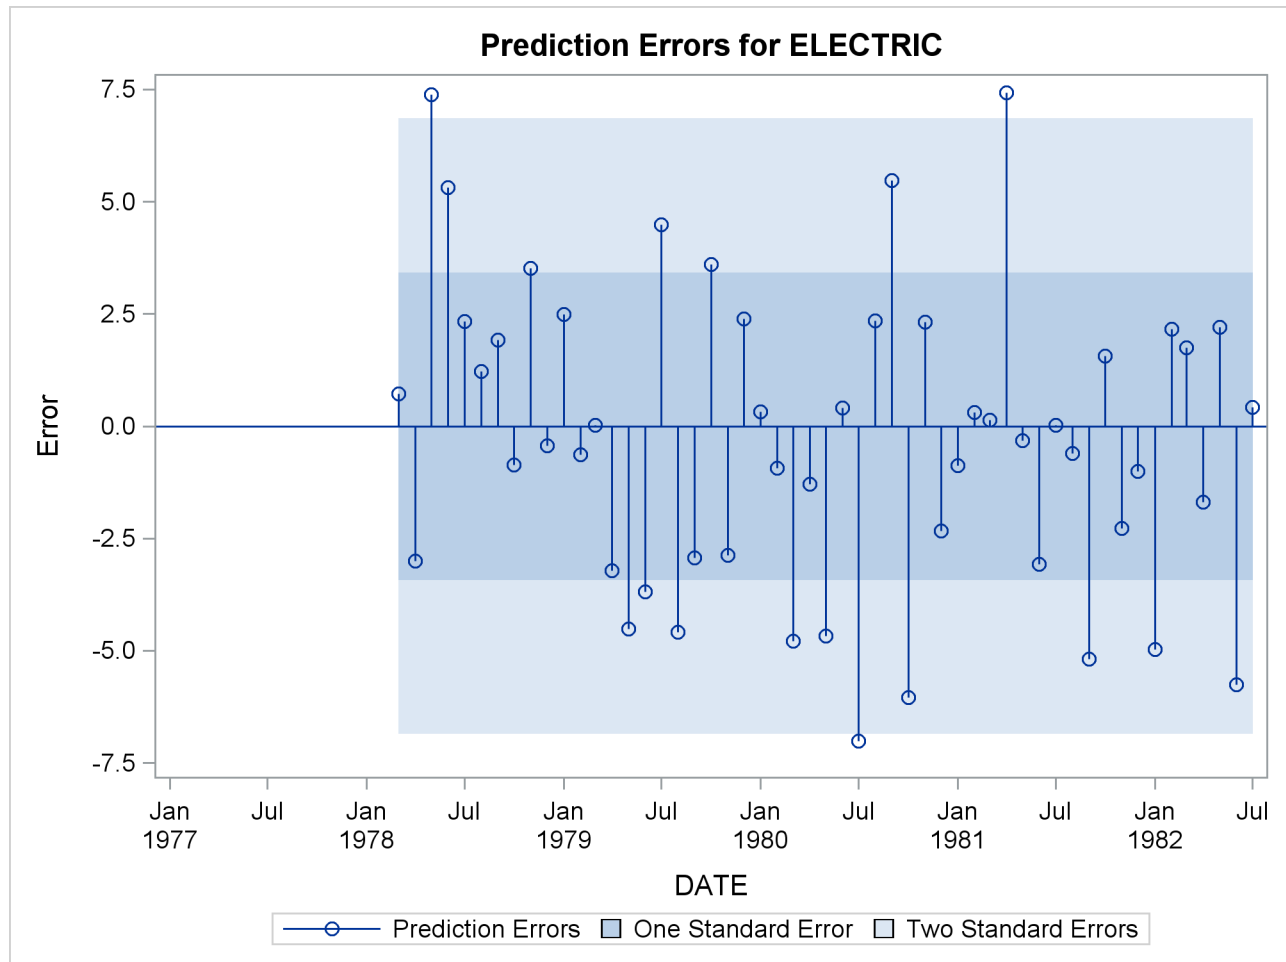
This example illustrates the use of ODS Graphics. For information about the graphics available in the VARMAX procedure, see the section “ODS Graphics” on page 2363.

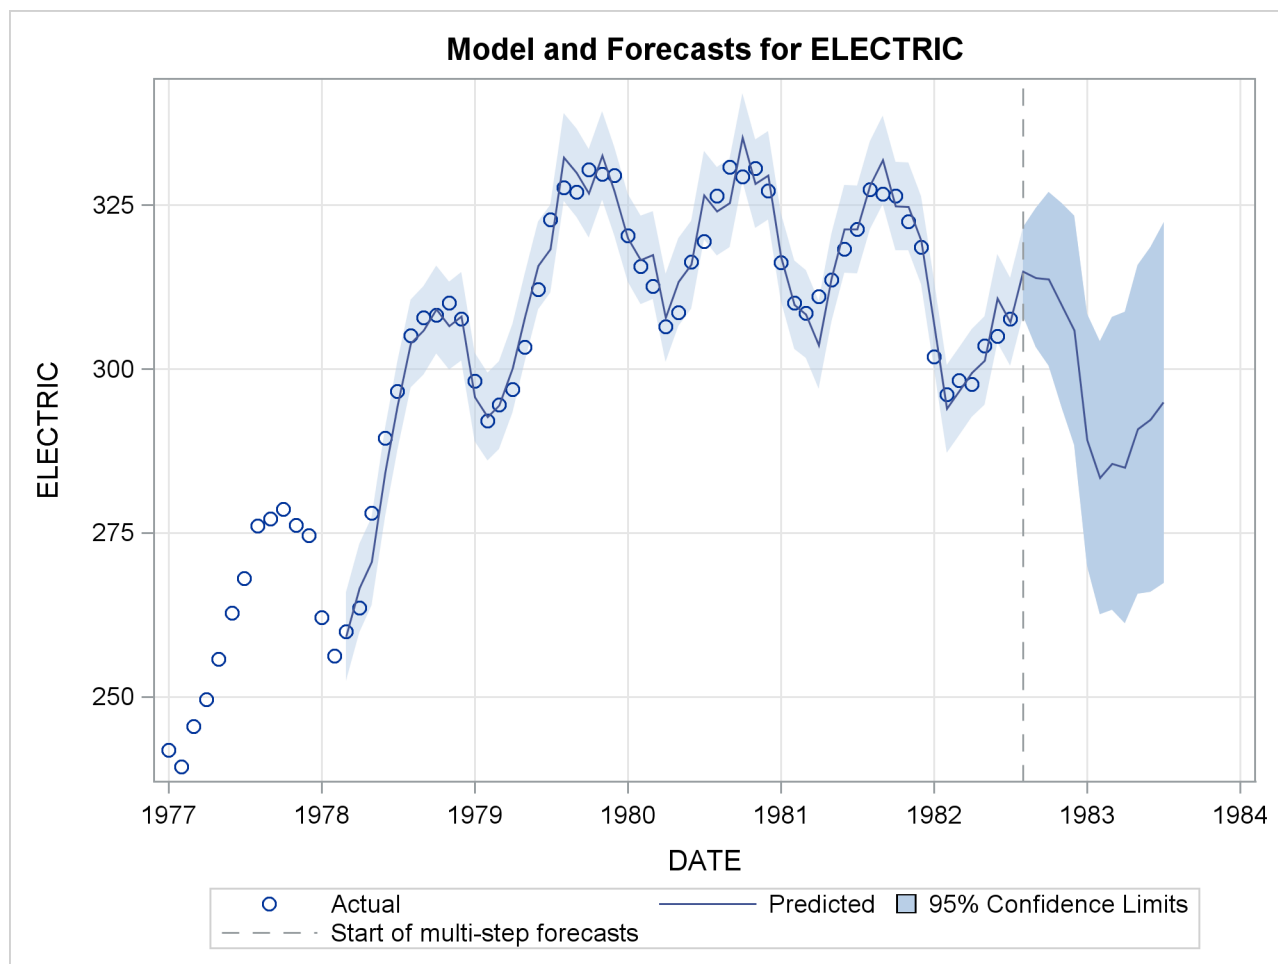
The following statements use the SASHELP.WORKERS data set to study the time series of electrical workers and its interaction with the series of masonry workers. The series and predict plots, the residual plot, and the forecast plot are created in [Output 35.4.1](#) through [Output 35.4.3](#). These are a selection of the plots created by the VARMAX procedure.

```
title "Illustration of ODS Graphics";
proc varmax data=sashelp.workers plot(unpack)=(residual model forecasts);
  id date interval=month;
  model electric masonry / dify=(1,12) noint p=1;
  output lead=12;
run;
```

Output 35.4.1 Series and Predicted Series Plots



Output 35.4.2 Residual Plot

Output 35.4.3 Series and Forecast Plots

References

- Anderson, T. W. (1951), "Estimating Linear Restrictions on Regression Coefficients for Multivariate Normal Distributions," *Annals of Mathematical Statistics*, 22, 327–351.
- Ansley, C. F. and Newbold, P. (1979), "Multivariate Partial Autocorrelations," *ASA Proceedings of the Business and Economic Statistics Section*, 349–353.
- Bollerslev, T. (1990), "Modeling the Coherence in Short-Run Nominal Exchange Rates: A Multivariate Generalized ARCH Model," *Review of Econometrics and Stochastics*, 72, 498–505.
- Engle, R. F. and Granger, C. W. J. (1987), "Co-integration and Error Correction: Representation, Estimation and Testing," *Econometrica*, 55, 251–276.
- Engle, R. F. and Kroner, K. F. (1995), "Multivariate Simultaneous Generalized ARCH," *Econometric Theory*, 11, 122–150.
- Golub, G. H. and Van Loan, C. F. (1983), *Matrix Computations*, Baltimore and London: Johns Hopkins University Press.
- Goodnight, J. H. (1979), "A Tutorial on the SWEEP Operator," *The American Statistician*, 33, 149–158.
- Hosking, J. R. M. (1980), "The Multivariate Portmanteau Statistic," *Journal of the American Statistical Association*, 75, 602–608.
- Johansen, S. (1988), "Statistical Analysis of Cointegration Vectors," *Journal of Economic Dynamics and Control*, 12, 231–254.
- Johansen, S. (1995a), "A Statistical Analysis of Cointegration for I(2) Variables," *Econometric Theory*, 11, 25–59.
- Johansen, S. (1995b), *Likelihood-Based Inference in Cointegrated Vector Autoregressive Models*, New York: Oxford University Press.
- Johansen, S. and Juselius, K. (1990), "Maximum Likelihood Estimation and Inference on Cointegration: With Applications to the Demand for Money," *Oxford Bulletin of Economics and Statistics*, 52, 169–210.
- Koreisha, S. and Pukkila, T. (1989), "Fast Linear Estimation Methods for Vector Autoregressive Moving Average Models," *Journal of Time Series Analysis*, 10, 325–339.
- Litterman, R. B. (1986), "Forecasting with Bayesian Vector Autoregressions: Five Years of Experience," *Journal of Business & Economic Statistics*, 4, 25–38.
- Lütkepohl, H. (1993), *Introduction to Multiple Time Series Analysis*, Berlin: Springer-Verlag.
- Osterwald-Lenum, M. (1992), "A Note with Quantiles of the Asymptotic Distribution of the Maximum Likelihood Cointegration Rank Test Statistics," *Oxford Bulletin of Economics and Statistics*, 54, 461–472.
- Pringle, R. M. and Rayner, D. L. (1971), *Generalized Inverse Matrices with Applications to Statistics*, Second Edition, New York: McGraw-Hill Inc.

Quinn, B. G. (1980), "Order Determination for a Multivariate Autoregression," *Journal of the Royal Statistical Society*, B, 42, 182–185.

Reinsel, G. C. (1997), *Elements of Multivariate Time Series Analysis*, Second Edition, New York: Springer-Verlag.

Spliid, H. (1983), "A Fast Estimation for the Vector Autoregressive Moving Average Models with Exogenous Variables," *Journal of the American Statistical Association*, 78, 843–849.

Stock, J. H. and Watson, M. W. (1988), "Testing for Common Trends," *Journal of the American Statistical Association*, 83, 1097–1107.

Chapter 36

The X11 Procedure

Contents

Overview: X11 Procedure	2400
Getting Started: X11 Procedure	2400
Basic Seasonal Adjustment	2401
X-11-ARIMA	2405
Syntax: X11 Procedure	2406
Functional Summary	2407
PROC X11 Statement	2408
ARIMA Statement	2409
BY Statement	2412
ID Statement	2412
MACURVES Statement	2413
MONTHLY Statement	2413
OUTPUT Statement	2417
PDWEIGHTS Statement	2418
QUARTERLY Statement	2418
SSPAN Statement	2421
TABLES Statement	2422
VAR Statement	2422
Details: X11 Procedure	2422
Historical Development of X-11	2422
Implementation of the X-11 Seasonal Adjustment Method	2424
Computational Details for Sliding Spans Analysis	2428
Data Requirements	2430
Missing Values	2430
Prior Daily Weights and Trading-Day Regression	2431
Adjustment for Prior Factors	2432
The YRAHEADOUT Option	2432
Effect of Backcast and Forecast Length	2433
Details of Model Selection	2434
OUT= Data Set	2437
The OUTSPAN= Data Set	2437
OUTSTB= Data Set	2438
OUTTDR= Data Set	2438
Printed Output	2440

ODS Table Names	2451
Examples: X11 Procedure	2456
Example 36.1: Component Estimation—Monthly Data	2456
Example 36.2: Components Estimation—Quarterly Data	2460
Example 36.3: Outlier Detection and Removal	2462
References	2464

Overview: X11 Procedure

The X11 procedure, an adaptation of the U.S. Bureau of the Census X-11 Seasonal Adjustment program, seasonally adjusts monthly or quarterly time series. The procedure makes additive or multiplicative adjustments and creates an output data set containing the adjusted time series and intermediate calculations.

The X11 procedure also provides the X-11-ARIMA method developed by Statistics Canada. This method fits an ARIMA model to the original series, then uses the model forecast to extend the original series. This extended series is then seasonally adjusted by the standard X-11 seasonal adjustment method. The extension of the series improves the estimation of the seasonal factors and reduces revisions to the seasonally adjusted series as new data become available.

The X11 procedure incorporates sliding spans analysis. This type of analysis provides a diagnostic for determining the suitability of seasonal adjustment for an economic series.

Seasonal adjustment of a series is based on the assumption that seasonal fluctuations can be measured in the original series, O_t , $t = 1, \dots, n$, and separated from trend cycle, trading-day, and irregular fluctuations. The seasonal component of this time series, S_t , is defined as the intrayear variation that is repeated constantly or in an evolving fashion from year to year. The trend cycle component, C_t , includes variation due to the long-term trend, the business cycle, and other long-term cyclical factors. The trading-day component, D_t , is the variation that can be attributed to the composition of the calendar. The irregular component, I_t , is the residual variation. Many economic time series are related in a multiplicative fashion ($O_t = S_t C_t D_t I_t$). A seasonally adjusted time series, $C_t I_t$, consists of only the trend cycle and irregular components.

Getting Started: X11 Procedure

The most common use of the X11 procedure is to produce a seasonally adjusted series. Eliminating the seasonal component from an economic series facilitates comparison among consecutive months or quarters. A plot of the seasonally adjusted series is often more informative about trends or location in a business cycle than a plot of the unadjusted series.

The following example shows how to use PROC X11 to produce a seasonally adjusted series, $C_t I_t$, from an original series $O_t = S_t C_t D_t I_t$.

In the multiplicative model, the trend cycle component C_t keeps the same scale as the original series O_t , while S_t , D_t , and I_t vary around 1.0. In all printed tables and in the output data set, these latter components are expressed as percentages, and thus will vary around 100.0 (in the additive case, they vary around 0.0).

The naming convention used in PROC X11 for the tables follows the original U.S. Bureau of the Census X-11 Seasonal Adjustment program specification (Shiskin, Young, and Musgrave 1967). Also, see the section “Printed Output” on page 2440. This convention is outlined in Figure 36.1.

The tables corresponding to parts A – C are intermediate calculations. The final estimates of the individual components are found in the D tables: table D10 contains the final seasonal factors, table D12 contains the final trend cycle, and table D13 contains the final irregular series. If you are primarily interested in seasonally adjusting a series without consideration of intermediate calculations or diagnostics, you only need to look at table D11, the final seasonally adjusted series.

For further details about the X-11-ARIMA tables, see Ladiray and Quenneville (2001).

Basic Seasonal Adjustment

Suppose you have monthly retail sales data starting in September 1978 in a SAS data set named SALES. At this point you do not suspect that any calendar effects are present, and there are no prior adjustments that need to be made to the data.

In this simplest case, you need only specify the DATE= variable in the MONTHLY statement, which associates a SAS date value to each observation. To see the results of the seasonal adjustment, you must request table D11, the final seasonally adjusted series, in a TABLES statement.

```
data sales;
  input sales @@;
  date = intnx( 'month', '01sep1978'd, _n_-1 );
  format date monyy7.;
datalines;

    ... more lines ...

/*--- X-11 ARIMA ---*/
proc x11 data=sales;
  monthly date=date;
  var sales;
  tables d11;
run;
```

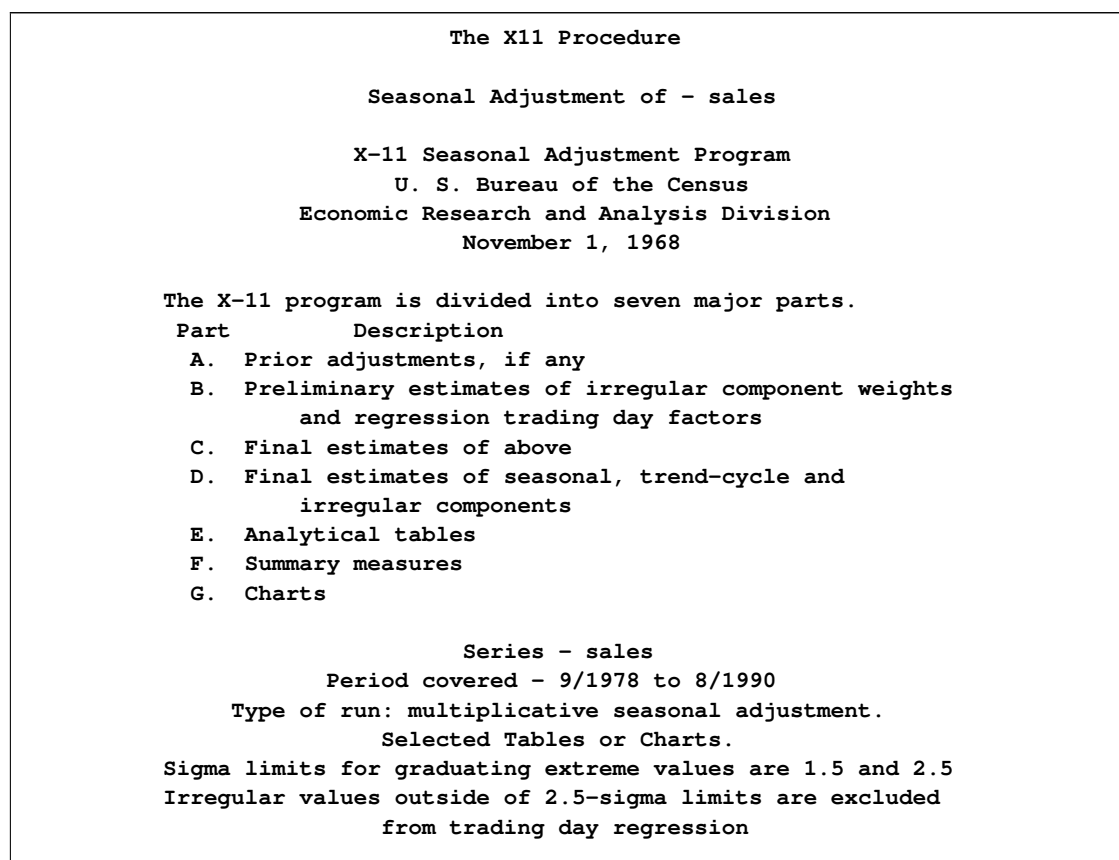
Figure 36.1 Basic Seasonal Adjustment

Figure 36.2 Basic Seasonal Adjustment

D11 Final Seasonally Adjusted Series						
Year	JAN	FEB	MAR	APR	MAY	JUN
1978
1979	124.935	126.533	125.282	125.650	127.754	129.648
1980	128.734	139.542	143.726	143.854	148.723	144.530
1981	176.329	166.264	167.433	167.509	173.573	175.541
1982	186.747	202.467	192.024	202.761	197.548	206.344
1983	233.109	223.345	218.179	226.389	224.249	227.700
1984	238.261	239.698	246.958	242.349	244.665	247.005
1985	275.766	282.316	294.169	285.034	294.034	296.114
1986	325.471	332.228	330.401	330.282	333.792	331.349
1987	363.592	373.118	368.670	377.650	380.316	376.297
1988	370.966	384.743	386.833	405.209	380.840	389.132
1989	428.276	418.236	429.409	446.467	437.639	440.832
1990	480.631	474.669	486.137	483.140	481.111	499.169

Avg	277.735	280.263	282.435	286.358	285.354	288.638

D11 Final Seasonally Adjusted Series							
Year	JUL	AUG	SEP	OCT	NOV	DEC	Total
1978	.	.	123.507	125.776	124.735	129.870	503.887
1979	127.880	129.285	126.562	134.905	133.356	136.117	1547.91
1980	140.120	153.475	159.281	162.128	168.848	165.159	1798.12
1981	179.301	182.254	187.448	197.431	184.341	184.304	2141.73
1982	211.690	213.691	214.204	218.060	228.035	240.347	2513.92
1983	222.045	222.127	222.835	212.227	230.187	232.827	2695.22
1984	251.247	253.805	264.924	266.004	265.366	277.025	3037.31
1985	294.196	309.162	311.539	319.518	318.564	323.921	3604.33
1986	337.095	341.127	346.173	350.183	360.792	362.333	4081.23
1987	379.668	375.607	374.257	372.672	368.135	364.150	4474.13
1988	385.479	377.147	397.404	403.156	413.843	416.142	4710.89
1989	450.103	454.176	460.601	462.029	427.499	485.113	5340.38
1990	485.370	485.103	3875.33

Avg	288.683	291.413	265.728	268.674	268.642	276.442	

Total:	40324	Mean:	280.03	S.D.:	111.31
--------	-------	-------	--------	-------	--------

You can compare the original series, table B1, and the final seasonally adjusted series, table D11, by plotting them together. These tables are requested and named in the OUTPUT statement.

```

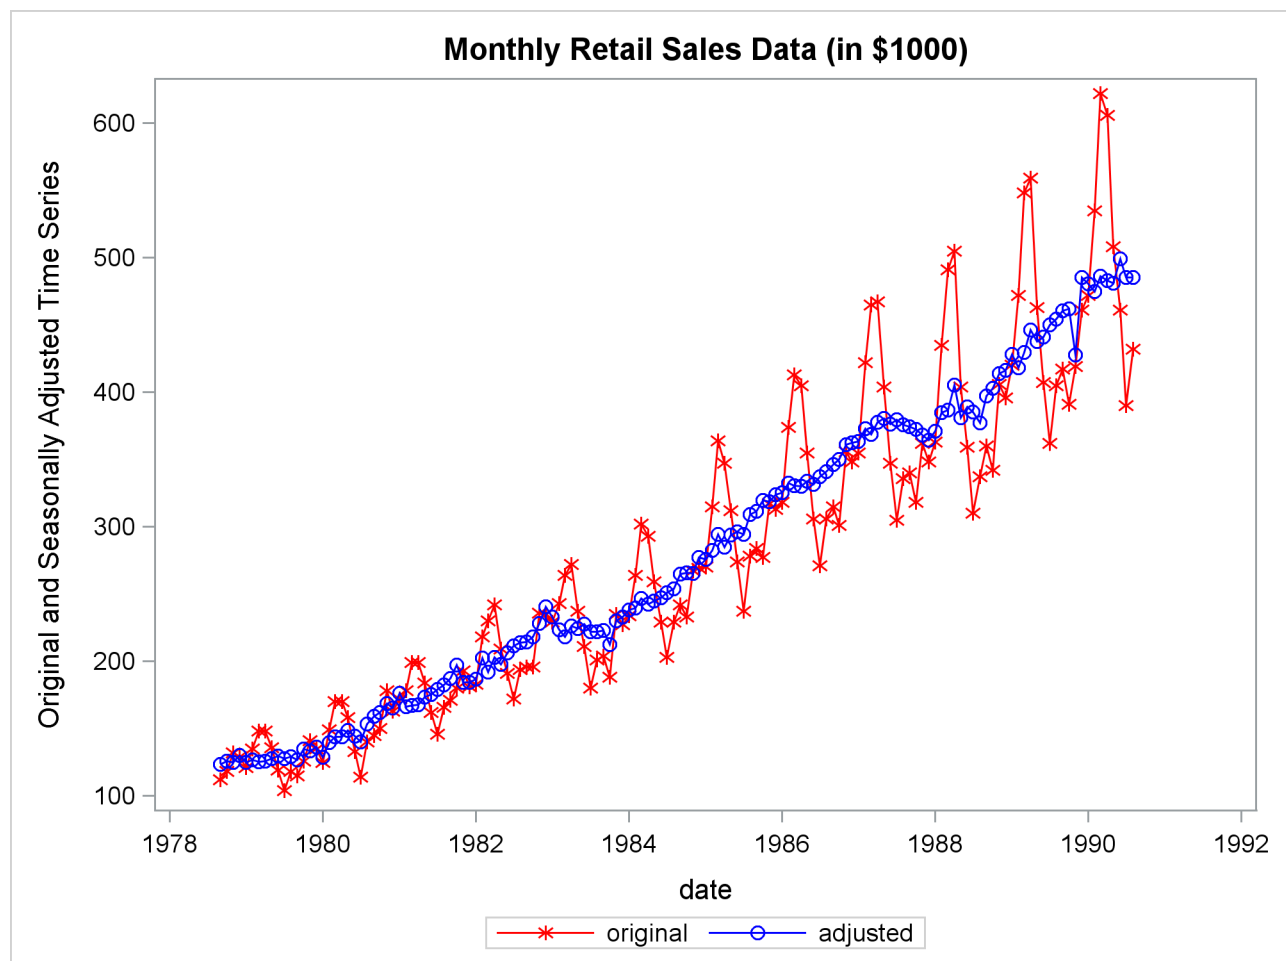
title 'Monthly Retail Sales Data (in $1000)';

proc x11 data=sales noprint;
  monthly date=date;
  var sales;
  output out=out b1=sales d11=adjusted;
run;

proc sgplot data=out;
  series x=date y=sales      / markers
                                markerattrs=(color=red symbol='asterisk')
                                lineattrs=(color=red)
                                legendlabel="original" ;
  series x=date y=adjusted / markers
                                markerattrs=(color=blue symbol='circle')
                                lineattrs=(color=blue)
                                legendlabel="adjusted" ;
  yaxis label='Original and Seasonally Adjusted Time Series';
run;

```

Figure 36.3 Plot of Original and Seasonally Adjusted Data



X-11-ARIMA

An inherent problem with the X-11 method is the revision of the seasonal factor estimates as new data become available. The X-11 method uses a set of centered moving averages to estimate the seasonal components. These moving averages apply symmetric weights to all observations except those at the beginning and end of the series, where asymmetric weights have to be applied. These asymmetric weights can cause poor estimates of the seasonal factors, which then can cause large revisions when new data become available.

While large revisions to seasonally adjusted values are not common, they can happen. When they do happen, it undermines the credibility of the X-11 seasonal adjustment method.

A method to address this problem was developed at Statistics Canada (Dagum 1980, 1982a). This method, known as X-11-ARIMA, applies an ARIMA model to the original data (after adjustments, if any) to forecast the series one or more years. This extended series is then seasonally adjusted, allowing symmetric weights to be applied to the end of the original data. This method was tested against a large number of Canadian economic series and was found to greatly reduce the amount of revisions as new data were added.

The X-11-ARIMA method is available in PROC X11 through the use of the ARIMA statement. The ARIMA statement extends the original series either with a user-specified ARIMA model or by an automatic selection process in which the best model from a set of five predefined ARIMA models is used.

The following example illustrates the use of the ARIMA statement. The ARIMA statement does not contain a user-specified model, so the best model is chosen by the automatic selection process. Forecasts from this best model are then used to extend the original series by one year. The following partial listing shows parameter estimates and model diagnostics for the ARIMA model chosen by the automatic selection process.

```
proc x11 data=sales;
    monthly date=date;
    var sales;
    arima;
run;
```

Figure 36.4 X-11-ARIMA Model Selection

Monthly Retail Sales Data (in \$1000)				
The X11 Procedure				
Seasonal Adjustment of - sales				
Conditional Least Squares Estimation				
Parameter	Estimate	Approx. Std Error	t Value	Lag
MU	0.0001728	0.0009596	0.18	0
MA1,1	0.3739984	0.0893427	4.19	1
MA1,2	0.0231478	0.0892154	0.26	2
MA2,1	0.5727914	0.0790835	7.24	12

Figure 36.4 continued

Conditional Least Squares Estimation				
Variance Estimate =	0.0014313			
Std Error Estimate =	0.0378326			
AIC	=	-482.2412	*	
SBC	=	-470.7404	*	
Number of Residuals=	131			
* Does not include log determinant				
Criteria Summary for Model 2: (0,1,2) (0,1,1)s, Log Transform				
Box-Ljung Chi-square: 22.03 with 21 df Prob= 0.40				
(Criteria prob > 0.05)				
Test for over-differencing: sum of MA parameters = 0.57				
(must be < 0.90)				
MAPE - Last Three Years: 2.84 (Must be < 15.00 %)				
- Last Year: 3.04				
- Next to Last Year: 1.96				
- Third from Last Year: 3.51				

Table D11 (final seasonally adjusted series) is now constructed using symmetric weights on observations at the end of the actual data. This should result in better estimates of the seasonal factors and, thus, smaller revisions in Table D11 as more data become available.

Syntax: X11 Procedure

The X11 procedure uses the following statements:

```

PROC X11 options ;
  ARIMA options ;
  BY variables ;
  ID variables ;
  MACURVES option ;
  MONTHLY options ;
  OUTPUT OUT=dataset options ;
  PDWEIGHTS option ;
  QUARTERLY options ;
  SSPAN options ;
  TABLES tablenames ;
  VAR variables ;

```

Either the MONTHLY or QUARTERLY statement must be specified, depending on the type of time series data you have. The PDWEIGHTS and MACURVES statements can be used only with the MONTHLY statement. The TABLES statement controls the printing of tables, while the OUTPUT statement controls the creation of the OUT= data set.

Functional Summary

The statements and options controlling the X11 procedures are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify input data set	PROC X11	DATA=
write the trading-day regression results to an output data set	PROC X11	OUTTDR=
write the stable seasonality test results to an output data set	PROC X11	OUTSTB=
write table values to an output data set	OUTPUT	OUT=
add extrapolated values to the output data set	PROC X11	OUTEX
add year ahead estimates to the output data set	PROC X11	YRAHEADOUT
write the sliding spans analysis results to an output data set	PROC X11	OUTSPAN=
Printing Control Options		
suppress all printed output	PROC X11	NOPRINT
suppress all printed ARIMA output	ARIMA	NOPRINT
print all ARIMA output	ARIMA	PRINTALL
print selected tables and charts	TABLES	
print selected groups of tables	MONTHLY	PRINTOUT=
	QUARTERLY	PRINTOUT=
print selected groups of charts	MONTHLY	CHARTS=
	QUARTERLY	CHARTS=
print preliminary tables associated with ARIMA processing	ARIMA	PRINTFP
specify number of decimals for printed tables	MONTHLY	NDEC=
	QUARTERLY	NDEC=
suppress all printed SSPAN output	SSPAN	NOPRINT
print all SSPAN output	SSPAN	PRINTALL
Date Information Options		
specify a SAS date variable	MONTHLY	DATE=
	QUARTERLY	DATE=
specify the beginning date	MONTHLY	START=
	QUARTERLY	START=
specify the ending date	MONTHLY	END=
	QUARTERLY	END=
specify beginning year for trading-day regression	MONTHLY	TDCOMPUTE=

Description	Statement	Option
Declaring the Role of Variables		
specify BY-group processing	BY	
specify the variables to be seasonally adjusted	VAR	
specify identifying variables	ID	
specify the prior monthly factor	MONTHLY	PMFACTOR=
Controlling the Table Computations		
use additive adjustment	MONTHLY	ADDITIVE
	QUARTERLY	ADDITIVE
specify seasonal factor moving average length	MACURVES	
specify the extreme value limit for trading-day regression	MONTHLY	EXCLUDE=
specify the lower bound for extreme irregulars	MONTHLY	FULLWEIGHT=
	QUARTERLY	FULLWEIGHT=
specify the upper bound for extreme irregulars	MONTHLY	ZEROWEIGHT=
	QUARTERLY	ZEROWEIGHT=
include the length-of-month in trading-day regression	MONTHLY	LENGTH
specify trading-day regression action	MONTHLY	TDREGR=
compute summary measure only	MONTHLY	SUMMARY
	QUARTERLY	SUMMARY
modify extreme irregulars prior to trend cycle estimation	MONTHLY	TRENDADJ
	QUARTERLY	TRENDADJ
specify moving average length in trend cycle estimation	MONTHLY	TRENDMA=
	QUARTERLY	TRENDMA=
specify weights for prior trading-day factors	PDWEIGHTS	

PROC X11 Statement

PROC X11 *options* ;

The following options can appear in the PROC X11 statement:

DATA= *SAS-data-set*

specifies the input SAS data set used. If it is omitted, the most recently created SAS data set is used.

OUTEXTRAP

adds the extra observations used in ARIMA processing to the output data set.

When ARIMA forecasting/backcasting is requested, extra observations are appended to the ends of the series, and the calculations are carried out on this extended series. The appended observations are not normally written to the OUT= data set. However, if OUTEXTRAP is specified, these extra observations are written to the output data set. If a DATE= variable is specified in the MONTHLY/QUARTERLY statement, the date variable is extrapolated to identify forecasts/backcasts. The OUTEXTRAP option can be abbreviated as OUTEX.

NOPRINT

suppresses any printed output. The NOPRINT option overrides any PRINTOUT=, CHARTS=, or TABLES statement and any output associated with the ARIMA statement.

OUTSPAN= SAS-data-set

specifies the output data set to store the sliding spans analysis results. Tables A1, C18, D10, and D11 for each span are written to this data set. See the section “[The OUTSPAN= Data Set](#)” on page 2437 for details.

OUTSTB= SAS-data-set

specifies the output data set to store the stable seasonality test results (table D8). All the information in the analysis of variance table associated with the stable seasonality test is contained in the variables written to this data set. See the section “[OUTSTB= Data Set](#)” on page 2438 for details.

OUTTDR= SAS-data-set

specifies the output data set to store the trading-day regression results (tables B15 and C15). All the information in the analysis of variance table associated with the trading-day regression is contained in the variables written to this data set. This option is valid only when TDREGR=PRINT, TEST, or ADJUST is specified in the MONTHLY statement. See the section “[OUTTDR= Data Set](#)” on page 2438 for details.

YRAHEADOUT

adds one-year-ahead forecast values to the output data set for tables C16, C18, and D10. The original purpose of this option was to avoid recomputation of the seasonal adjustment factors when new data became available. While computing costs were an important factor when the X-11 method was developed, this is no longer the case and this option is obsolete. See the section “[The YRAHEADOUT Option](#)” on page 2432 for details.

ARIMA Statement

ARIMA options ;

The ARIMA statement applies the X-11-ARIMA method to the series specified in the VAR statement. This method uses an ARIMA model estimated from the original data to extend the series one or more years. The ARIMA statement options control the ARIMA model used and the estimation, forecasting, and printing of this model.

There are two ways of obtaining an ARIMA model to extend the series. A model can be given explicitly with the MODEL= and TRANSFORM= options. Alternatively, the best-fitting model from a set of five predefined models is found automatically whenever the MODEL= option is absent. See the section “[Details of Model Selection](#)” on page 2434 for details.

BACKCAST= n

specifies the number of years to backcast the series. The default is BACKCAST= 0. See the section “[Effect of Backcast and Forecast Length](#)” on page 2433 for details.

CHICR= value

specifies the criteria for the significance level for the Box-Ljung chi-square test for lack of fit when testing the five predefined models. The default is CHICR= 0.05. The CHICR= option values must be between 0.01 and 0.90. The hypothesis being tested is that of model adequacy. Nonrejection of the hypothesis is evidence for an adequate model. Making the CHICR= value smaller makes it easier to accept the model. See the section “[Criteria Details](#)” on page 2435 for further details on the CHICR= option.

CONVERGE= value

specifies the convergence criterion for the estimation of an ARIMA model. The default value is 0.001. The CONVERGE= value must be positive.

FORECAST= n

specifies the number of years to forecast the series. The default is FORECAST= 1. See the section “[Effect of Backcast and Forecast Length](#)” on page 2433 for details.

MAPECR= value

specifies the criteria for the mean absolute percent error (MAPE) when testing the five predefined models. A small MAPE value is evidence for an adequate model; a large MAPE value results in the model being rejected. The MAPECR= value is the boundary for acceptance/rejection. Thus a larger MAPECR= value would make it easier for a model to pass the criteria. The default is MAPECR= 15. The MAPECR= option values must be between 1 and 100. See the section “[Criteria Details](#)” on page 2435 for further details on the MAPECR= option.

MAXITER= n

specifies the maximum number of iterations in the estimation process. MAXITER must be between 1 and 60; the default value is 15.

METHOD= CLS**METHOD= ULS****METHOD= ML**

specifies the estimation method. ML requests maximum likelihood, ULS requests unconditional least squares, and CLS requests conditional least squares. METHOD=CLS is the default. The maximum likelihood estimates are more expensive to compute than the conditional least squares estimates. In some cases, however, they can be preferable. For further information on the estimation methods, see “[Estimation Details](#)” on page 250 in Chapter 7, “[The ARIMA Procedure](#).”

MODEL= (P=n1 Q=n2 SP=n3 SQ=n4 DIF=n5 SDIF=n6 < NOINT > < CENTER >)

specifies the ARIMA model. The AR and MA orders are given by P=n1 and Q=n2, respectively, while the seasonal AR and MA orders are given by SP=n3 and SQ=n4, respectively. The lag corresponding to seasonality is determined by the MONTHLY or QUARTERLY statement. Similarly, differencing and seasonal differencing are given by DIF=n5 and SDIF=n6, respectively.

For example

```
arima model=( p=2 q=1 sp=1 dif=1 sdif=1 );
```

specifies a (2,1,1)(1,1,0)_s model, where *s*, the seasonality, is either 12 (monthly) or 4 (quarterly). More examples of the MODEL= syntax are given in the section “[Details of Model Selection](#)” on page 2434.

NOINT

suppresses the fitting of a constant (or intercept) parameter in the model. (That is, the parameter μ is omitted.)

CENTER

centers each time series by subtracting its sample mean. The analysis is done on the centered data. Later, when forecasts are generated, the mean is added back. Note that centering is done after differencing. The CENTER option is normally used in conjunction with the NOCONSTANT option of the ESTIMATE statement.

For example, to fit an AR(1) model on the centered data without an intercept, use the following ARIMA statement:

```
arima model=( p=1 center noint );
```

NOPRINT

suppresses the normal printout generated by the ARIMA statement. Note that the effect of specifying the NOPRINT option in the ARIMA statement is different from the effect of specifying the NOPRINT in the PROC X11 statement, since the former only affects ARIMA output.

OVDIFCR= value

specifies the criteria for the over-differencing test when testing the five predefined models. When the MA parameters in one of these models sum to a number close to 1.0, this is an indication of over-parameterization and the model is rejected. The OVDIFCR= value is the boundary for this rejection; values greater than this value fail the over-differencing test. A larger OVDIFCR= value would make it easier for a model to pass the criteria. The default is OVDIFCR= 0.90. The OVDIFCR= option values must be between 0.80 and 0.99. See the section “[Criteria Details](#)” on page 2435 for further details on the OVDIFCR= option.

PRINTALL

provides the same output as the default printing for all models fit and, in addition, prints an estimation summary and chi-square statistics for each model fit. See “[Printed Output](#)” on page 2440 for details.

PRINTFP

prints the results for the initial pass of X11 made to exclude trading-day effects. This option has an effect only when the TDREGR= option specifies ADJUST, TEST, or PRINT. In these cases, an initial pass of the standard X11 method is required to get rid of calendar effects before doing any ARIMA estimation. Usually this first pass is not of interest, and by default no tables are printed. However, specifying PRINTFP in the ARIMA statement causes any tables printed in the final pass to also be printed for this initial pass.

TRANSFORM= (LOG) | LOG**TRANSFORM= (constant ** power)**

The ARIMA statement in PROC X11 allows certain transformations on the series before estimation. The specified transformation is applied only to a user-specified model. If TRANSFORM= is specified and the MODEL= option is not specified, the transformation request is ignored and a warning is printed.

The LOG transformation requests that the natural log of the series be used for estimation. The resulting forecast values are transformed back to the original scale.

A general power transformation of the form $X_t \rightarrow (X_t + a)^b$ is obtained by specifying

```
transform= ( a ** b )
```

If the constant a is not specified, it is assumed to be zero. The specified ARIMA model is then estimated using the transformed series. The resulting forecast values are transformed back to the original scale.

BY Statement

BY *variables* ;

A BY statement can be used with PROC X11 to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the procedure expects the input DATA= data set to be sorted in order of the BY variables.

ID Statement

ID *variables* ;

If you are creating an output data set, use the ID statement to put values of the ID variables, in addition to the table values, into the output data set. The ID statement has no effect when an output data set is not created. If the DATE= variable is specified in the MONTHLY or QUARTERLY statement, this variable is included automatically in the OUTPUT data set. If no DATE= variable is specified, the variable _DATE_ is added.

The date variable (or _DATE_) values outside the range of the actual data (from ARIMA forecasting or backcasting, or from YRAHEADOUT) are extrapolated, while all other ID variables are missing.

MACURVES Statement

MACURVES *month=option* ... ;

The MACURVES statement specifies the length of the moving-average curves for estimating the seasonal factors for any month. This statement can be used only with monthly time series data.

The *month=option* specifications consist of the month name (or the first three letters of the month name), an equal sign, and one of the following option values:

'3'	specifies a three-term moving average for the month
'3X3'	specifies a three-by-three moving average
'3X5'	specifies a three-by-five moving average
'3X9'	specifies a three-by-nine moving average
STABLE	specifies a stable seasonal factor (average of all values for the month)

For example, the statement

```
macurves jan='3' feb='3x3' march='3x5' april='3x9';
```

uses a three-term moving average to estimate seasonal factors for January, a 3×3 (a three-term moving average of a three-term moving average) for February, a 3×5 (a three-term moving average of a five-term moving average) for March, and a 3×9 (a three-term moving average of a nine-term moving average) for April.

The numeric values used for the weights of the various moving averages and a discussion of the derivation of these weights are given in Shiskin, Young, and Musgrave (1967). A general discussion of moving average weights is given in Dagum (1985).

If the specification for a month is omitted, the X11 procedure uses a three-by-three moving average for the first estimate of each iteration and a three-by-five average for the second estimate.

MONTHLY Statement

MONTHLY *options* ;

The MONTHLY statement must be used when the input data to PROC X11 are a monthly time series. The MONTHLY statement specifies options that determine the computations performed by PROC X11 and what is included in its output. Either the DATE= or START= option must be used.

The following options can appear in the MONTHLY statement.

ADDITIVE

performs additive adjustments. If the ADDITIVE option is omitted, PROC X11 performs multiplicative adjustments.

CHARTS= STANDARD**CHARTS= FULL****CHARTS= NONE**

specifies the charts produced by the procedure. The default is CHARTS=STANDARD, which specifies 12 monthly seasonal charts and a trend cycle chart. If you specify CHARTS=FULL (or CHARTS=ALL), the procedure prints additional charts of irregular and seasonal factors. To print no charts, specify CHARTS=NONE.

The TABLES statement can also be used to specify particular monthly charts to be printed. If no CHARTS= option is given, and a TABLES statement is given, the TABLES statement overrides the default value of CHARTS=STANDARD; that is, no charts (or tables) are printed except those specified in the TABLES statement. However, if both the CHARTS= option and a TABLES statement are given, the charts corresponding to the CHARTS= option and those requested by the TABLES statement are printed.

For example, suppose you wanted only charts G1, the final seasonally adjusted series and trend cycle, and G4, the final irregular and final modified irregular series. You would specify the following statements:

```
monthly date=date;
tables g1 g4;
```

DATE= variable

specifies a variable that gives the date for each observation. The starting and ending dates are obtained from the first and last values of the DATE= variable, which must contain SAS date values. The procedure checks values of the DATE= variable to ensure that the input observations are sequenced correctly. This variable is automatically added to the OUTPUT= data set if one is requested and extrapolated if necessary. If the DATE= option is not specified, the START= option must be specified.

The DATE= option and the START= and END= options can be used in combination to subset a series for processing. For example, suppose you have 12 years of monthly data (144 observations, no missing values) beginning in January 1970 and ending in December 1981, and you wanted to seasonally adjust only six years beginning in January 1974. Specifying

```
monthly date=date start=jan1974 end=dec1979;
```

would seasonally adjust only this subset of the data. If instead you wanted to adjust the last eight years of data, only the START= option is needed:

```
monthly date=date start=jan1974;
```

END= mmmyyyy

specifies that only the part of the input series ending with the month and year given be adjusted (for example, END=DEC1970). See the DATE=variable option for using the START= and END= options to subset a series for processing.

EXCLUDE= *value*

excludes from the trading-day regression any irregular values that are more than *value* standard deviations from the mean. The EXCLUDE=*value* must be between 0.1 and 9.9, with the default value being 2.5.

FULLWEIGHT= *value*

assigns weights to irregular values based on their distance from the mean in standard deviation units. The weights are used for estimating seasonal and trend cycle components. Irregular values less than the FULLWEIGHT= *value* (in standard deviation units) are assigned full weights of 1, values that fall between the ZEROWEIGHT= and FULLWEIGHT= limits are assigned weights linearly graduated between 0 and 1, and values greater than the ZEROWEIGHT= limit are assigned a weight of 0.

For example, if ZEROWEIGHT=2 and FULLWEIGHT=1, a value 1.3 standard deviations from the mean would be assigned a graduated weight. The FULLWEIGHT=*value* must be between 0.1 and 9.9 but must be less than the ZEROWEIGHT=*value*. The default is FULLWEIGHT=1.5.

LENGTH

includes length-of-month allowance in computing trading-day factors. If this option is omitted, length-of-month allowances are included with the seasonal factors.

NDEC= *n*

specifies the number of decimal places shown in the printed tables in the listing. This option has no effect on the precision of the variable values in the output data set.

PMFACTOR= *variable*

specifies a variable containing the prior monthly factors. Use this option if you have previous knowledge of monthly adjustment factors. The PMFACTOR= option can be used to make the following adjustments:

- adjust the level of all or part of a series with discontinuities
- adjust for the influence of holidays that fall on different dates from year to year, such as the effect of Easter on certain retail sales
- adjust for unreasonable weather influence on series, such as housing starts
- adjust for changing starting dates of fiscal years (for budget series) or model years (for automobiles)
- adjust for temporary dislocating events, such as strikes

See the section “[Prior Daily Weights and Trading-Day Regression](#)” on page 2431 for details and examples using the PMFACTOR= option.

PRINTOUT= STANDARD | LONG | FULL | NONE

specifies the tables to be printed by the procedure. If the PRINTOUT=STANDARD option is specified, between 17 and 27 tables are printed, depending on the other options that are specified. PRINTOUT=LONG prints between 27 and 39 tables, and PRINTOUT=FULL prints between 44 and 59 tables. Specifying PRINTOUT=NONE results in no tables being printed; however, charts are still printed. The default is PRINTOUT=STANDARD.

The TABLES statement can also be used to specify particular monthly tables to be printed. If no PRINTOUT= option is specified, and a TABLES statement is given, the TABLES statement overrides

the default value of PRINTOUT=STANDARD; that is, no tables (or charts) are printed except those given in the TABLES statement. However, if both the PRINTOUT= option and a TABLES statement are specified, the tables corresponding to the PRINTOUT= option and those requested by the TABLES statement are printed.

START= *mmmyyyy*

adjusts only the part of the input series starting with the specified month and year. When the DATE= option is not used, the START= option gives the year and month of the first input observation — for example, START=JAN1966. START= must be specified if DATE= is not given. If START= is specified (and no DATE= option is given), and an OUT= data set is requested, a variable named _DATE_ is added to the data set, giving the date value for each observation. See the DATE= *variable* option for using the START= and END= options to subset a series.

SUMMARY

specifies that the data are already seasonally adjusted and the procedure is to produce summary measures. If the SUMMARY option is omitted, the X11 procedure performs seasonal adjustment of the input data before calculating summary measures.

TD COMPUTE= *year*

uses the part of the input series beginning with January of the specified year to derive trading-day weights. If this option is omitted, the entire series is used.

TD REGR= NONE | PRINT | ADJUST | TEST

specifies the treatment of trading-day regression. TDREG=NONE omits the computation of the trading-day regression. TDREG=PRINT computes and prints the trading-day regressions but does not adjust the series. TDREG=ADJUST computes and prints the trading-day regression and adjusts the irregular components to obtain preliminary weights. TDREG=TEST adjusts the final series if the trading-day regression estimates explain significant variation on the basis of an F test (or residual trading-day variation if prior weights are used). The default is TDREGR=NONE.

See the section “[Prior Daily Weights and Trading-Day Regression](#)” on page 2431 for details and examples using the TDREGR= option.

If ARIMA processing is requested, any value of TDREGR other than the default TDREGR=NONE will cause PROC X11 to perform an initial pass (see the “[Details: X11 Procedure](#)” on page 2422 section and the PRINTFP option).

The significance level reported in Table C15 should be viewed with caution. The dependent variable in the trading-day regression is the irregular component formed by an averaging operation. This induces a correlation in the dependent variable and hence in the residuals from which the F test is computed. Hence the distribution of the trading-day regression F statistics differs from an exact F ; see Cleveland and Devlin (1980) for details.

TRENDADJ

modifies extreme irregular values prior to computing the trend cycle estimates in the first iteration. If the TRENDADJ option is omitted, the trend cycle is computed without modifications for extremes.

TRENDMA= 9 | 13 | 23

specifies the number of terms in the moving average to be used by the procedure in estimating the variable trend cycle component. The value of the TRENDMA= option must be 9, 13, or 23. If the TRENDMA= option is omitted, the procedure selects an appropriate moving average. For information about the number of terms in the moving average, see Shiskin, Young, and Musgrave (1967).

ZEROWEIGHT= value

assigns weights to irregular values based on their distance from the mean in standard deviation units. The weights are used for estimating seasonal and trend cycle components. Irregular values beyond the standard deviation limit specified in the ZEROWEIGHT= option are assigned zero weights. Values that fall between the two limits (ZEROWEIGHT= and FULLWEIGHT=) are assigned weights linearly graduated between 0 and 1. For example, if ZEROWEIGHT=2 and FULLWEIGHT=1, a value 1.3 standard deviations from the mean would be assigned a graduated weight. The ZEROWEIGHT=value must be between 0.1 and 9.9 but must be greater than the FULLWEIGHT=value. The default is ZEROWEIGHT=2.5.

The ZEROWEIGHT option can be used in conjunction with the FULLWEIGHT= option to adjust outliers from a monthly or quarterly series. See [Example 36.3](#) later in this chapter for an illustration of this use.

OUTPUT Statement

OUTPUT OUT= *SAS-data-set tablename=var1 var2 ... ;*

The OUTPUT statement creates an output data set containing specified tables. The data set is named by the OUT= option.

OUT= SAS-data-set

If OUT= is omitted, the SAS System names the new data set by using the DATA n convention.

For each table to be included in the output data set, write the X11 table identification keyword, an equal sign, and a list of new variable names:

tablename = var1 var2 ...

The *tablename* keywords that can be used in the OUTPUT statement are listed in the section “[Printed Output](#)” on page 2440. The following is an example of a VAR statement and an OUTPUT statement:

```
var z1 z2 z3;
output out=out_x11 b1=s d11=w x y;
```

The variable *s* contains the table B1 values for the variable *z1*, while the table D11 values for variables *z1*, *z2*, and *z3* are contained in variables *w*, *x*, and *y*, respectively. As this example shows, the list of variables following a *tablename*= keyword can be shorter than the VAR variable list.

In addition to the variables named by *tablename* =var1 var2 ..., the ID variables, and BY variables, the output data set contains a date identifier variable. If the DATE= option is given in the MONTHLY or QUARTERLY statement, the DATE= variable is the date identifier. If no DATE= option is given, a variable named `_DATE_` is the date identifier.

PDWEIGHTS Statement

PDWEIGHTS *day=w ... ;*

The PDWEIGHTS statement can be used to specify one to seven daily weights. The statement can only be used with monthly series that are seasonally adjusted using the multiplicative model. These weights are used to compute prior trading-day factors, which are then used to adjust the original series prior to the seasonal adjustment process. Only relative weights are needed; the X11 procedure adjusts the weights so that they sum to 7.0. The weights can also be corrected by the procedure on the basis of estimates of trading-day variation from the input data.

See the section “[Prior Daily Weights and Trading-Day Regression](#)” on page 2431 for details and examples using the PDWEIGHTS statement.

Each *day=w* option specifies a weight (*w*) for the named day. The *day* can be any day, Sunday through Saturday. The *day* keyword can be the full spelling of the day, or the three-letter abbreviation. For example, SATURDAY=1.0 and SAT=1.0 are both valid. The weights *w* must be a numeric value between 0.0 and 10.0.

The following is an example of a PDWEIGHTS statement:

```
pdweights sun=.2 mon=.9 tue=1 wed=1 thu=1 fri=.8 sat=.3;
```

Any number of days can be specified with one PDWEIGHTS statement. The default weight value for any day that is not specified is 0. If you do not use a PDWEIGHTS statement, the program computes daily weights if TDREGR=ADJUST is specified. See Shiskin, Young, and Musgrave (1967) for details.

QUARTERLY Statement

QUARTERLY *options ;*

The QUARTERLY statement must be used when the input data are quarterly time series. This statement includes options that determine the computations performed by the procedure and what is in the printed output. The DATE= option or the START= option must be used.

The following options can appear in the QUARTERLY statement.

ADDITIVE

performs additive adjustments. If this option is omitted, the procedure performs multiplicative adjustments.

CHARTS= STANDARD**CHARTS= FULL****CHARTS= NONE**

specifies the charts to be produced by the procedure. The default value is **CHARTS=STANDARD**, which specifies four quarterly seasonal charts and a trend cycle chart. If you specify **CHARTS=FULL** (or **CHARTS=ALL**), the procedure prints additional charts of irregular and seasonal factors. To print no charts, specify **CHARTS=NONE**. The **TABLES** statement can also be used to specify particular charts to be printed. The presence of a **TABLES** statement overrides the default value of **CHARTS=STANDARD**; that is, if a **TABLES** statement is specified, and no **CHARTS=option** is specified, no charts (nor tables) are printed except those given in the **TABLES** statement. However, if both the **CHARTS= option** and a **TABLES** statement are given, the charts corresponding to the **CHARTS= option** and those requested by the **TABLES** statement are printed.

For example, suppose you wanted only charts G1, the final seasonally adjusted series and trend cycle, and G4, the final irregular and final modified irregular series. This is accomplished by specifying the following statements:

```
quarterly date=date;
tables g1 g4;
```

DATE= variable

specifies a variable that gives the date for each observation. The starting and ending dates are obtained from the first and last values of the **DATE= variable**, which must contain SAS date values. The procedure checks values of the **DATE= variable** to ensure that the input observations are sequenced correctly. This variable is automatically added to the **OUTPUT= data set** if one is requested, and extrapolated if necessary. If the **DATE= option** is not specified, the **START= option** must be specified.

The **DATE= option** and the **START=** and **END= options** can be used in combination to subset a series for processing. For example, suppose you have a series with 10 years of quarterly data (40 observations, no missing values) beginning in '1970Q1' and ending in '1979Q4', and you want to seasonally adjust only four years beginning in '1974Q1' and ending in '1977Q4'. Specifying

```
quarterly date=variable start='1974q1' end='1977q4';
```

seasonally adjusts only this subset of the data. If instead you wanted to adjust the last six years of data, only the **START= option** is needed:

```
quarterly date=variable start='1974q1';
```

END= 'yyyyQq'

specifies that only the part of the input series ending with the quarter and year given be adjusted (for example, **END='1973Q4'**). The specification must be enclosed in quotes and *q* must be 1, 2, 3, or 4. See the **DATE= variable** option for using the **START=** and **END= options** to subset a series.

FULLWEIGHT= value

assigns weights to irregular values based on their distance from the mean in standard deviation units. The weights are used for estimating seasonal and trend cycle components. Irregular values less than

the FULLWEIGHT= value (in standard deviation units) are assigned full weights of 1, values that fall between the ZEROWEIGHT= and FULLWEIGHT= limits are assigned weights linearly graduated between 0 and 1, and values greater than the ZEROWEIGHT= limit are assigned a weight of 0.

For example, if ZEROWEIGHT=2 and FULLWEIGHT=1, a value 1.3 standard deviations from the mean would be assigned a graduated weight. The default is FULLWEIGHT=1.5.

NDEC= *n*

specifies the number of decimal places shown on the output tables. This option has no effect on the precision of the variables in the output data set.

PRINTOUT= STANDARD

PRINTOUT= LONG

PRINTOUT= FULL

PRINTOUT= NONE

specifies the tables to print. If PRINTOUT=STANDARD is specified, between 17 and 27 tables are printed, depending on the other options that are specified. PRINTOUT=LONG prints between 27 and 39 tables, and PRINTOUT=FULL prints between 44 and 59 tables. Specifying PRINTOUT=NONE results in no tables being printed. The default is PRINTOUT=STANDARD.

The TABLES statement can also specify particular quarterly tables to be printed. If no PRINTOUT= is given, and a TABLES statement is given, the TABLES statement overrides the default value of PRINTOUT=STANDARD; that is, no tables (or charts) are printed except those given in the TABLES statement. However, if both the PRINTOUT= option and a TABLES statement are given, the tables corresponding to the PRINTOUT= option and those requested by the TABLES statement are printed.

START= 'yyyyQq'

adjusts only the part of the input series starting with the quarter and year given. When the DATE= option is not used, the START= option gives the year and quarter of the first input observation (for example, START='1967Q1'). The specification must be enclosed in quotes, and *q* must be 1, 2, 3, or 4. START= must be specified if the DATE= option is not given. If START= is specified (and no DATE= is given), and an OUTPUT= data set is requested, a variable named _DATE_ is added to the data set, giving the date value for a given observation. See the DATE= option for using the START= and END= options to subset a series.

SUMMARY

specifies that the input is already seasonally adjusted and that the procedure is to produce summary measures. If this option is omitted, the procedure performs seasonal adjustment of the input data before calculating summary measures.

TRENDADJ

modifies extreme irregular values prior to computing the trend cycle estimates. If this option is omitted, the trend cycle is computed without modification for extremes.

ZEROWEIGHT= *value*

assigns weights to irregular values based on their distance from the mean in standard deviation units. The weights are used for estimating seasonal and trend cycle components. Irregular values beyond the standard deviation limit specified in the ZEROWEIGHT= option are assigned zero weights. Values that fall between the two limits (ZEROWEIGHT= and FULLWEIGHT=) are assigned weights

linearly graduated between 0 and 1. For example, if ZEROWEIGHT=2 and FULLWEIGHT=1, a value 1.3 standard deviations from the mean would be assigned a graduated weight. The default is ZEROWEIGHT=2.5.

The ZEROWEIGHT option can be used in conjunction with the FULLWEIGHT= option to adjust outliers from a monthly or quarterly series. See [Example 36.3](#) later in this chapter for an illustration of this use.

SSPAN Statement

SSPAN options ;

The SSPAN statement applies sliding spans analysis to determine the suitability of seasonal adjustment for an economic series.

The following options can appear in the SSPAN statement:

NDEC= *n*

specifies the number of decimal places shown on selected sliding span reports. This option has no effect on the precision of the variables values in the OUTSPAN output data set.

CUTOFF= *value*

gives the percentage value for determining an excessive difference within a span for the seasonal factors, the seasonally adjusted series, and month-to-month and year-to-year differences in the seasonally adjusted series. The default value is 3.0. The use of the CUTOFF=value in determining the maximum percent difference (MPD) is described in the section “[Computational Details for Sliding Spans Analysis](#)” on page 2428. Caution should be used in changing the default CUTOFF=value. The empirical threshold ranges found by the U.S. Census Bureau no longer apply when value is changed.

TDCUTOFF= *value*

gives the percentage value for determining an excessive difference within a span for the trading-day factors. The default value is 2.0. The use of the TDCUTOFF=value in determining the maximum percent difference (MPD) is described in the section “[Computational Details for Sliding Spans Analysis](#)” on page 2428. Caution should be used in changing the default TDCUTOFF=value. The empirical threshold ranges found by the U.S. Census Bureau no longer apply when the value is changed.

NOPRINT

suppresses all sliding span reports. See “[Computational Details for Sliding Spans Analysis](#)” on page 2428 for more details on sliding span reports.

PRINT

prints the summary sliding span reports S 0 through S 6.E.

PRINTALL

prints the summary sliding spans report S 0 through S 6.E, along with detail reports S 7.A through S 7.E.

TABLES Statement

TABLES *tablenames* ;

The TABLES statement prints the tables specified in addition to the tables that are printed as a result of the PRINTOUT= option in the MONTHLY or QUARTERLY statement. Table names are listed in [Table 36.4](#) later in this chapter.

To print only selected tables, omit the PRINTOUT= option in the MONTHLY or QUARTERLY statement and list the tables to be printed in the TABLES statement. For example, to print only the final seasonal factors and final seasonally adjusted series, use the statement

```
tables d10 d11;
```

VAR Statement

VAR *variables* ;

The VAR statement is used to specify the variables in the input data set that are to be analyzed by the procedure. Only numeric variables can be specified. If the VAR statement is omitted, all numeric variables are analyzed except those appearing in a BY or ID statement or the variable named in the DATE= option in the MONTHLY or QUARTERLY statement.

Details: X11 Procedure

Historical Development of X-11

This section briefly describes the historical development of the standard X-11 seasonal adjustment method and the later development of the X-11-ARIMA method. Most of the following discussion is based on a comprehensive article by Bell and Hillmer (1984), which describes the history of X-11 and the justification of using seasonal adjustment methods, such as X-11, given the current availability of time series software. For further discussions about statistical problems associated with the X-11 method, see Ghysels (1990).

Seasonal adjustment methods began to be developed in the 1920s and 1930s, before there were suitable analytic models available and before electronic computing devices were in existence. The lack of any suitable model led to methods that worked the same for any series — that is, methods that were not model-based and that could be applied to any series. Experience with economic series had shown that a given mathematical form could adequately represent a time series only for a fixed length; as more data were added, the model became inadequate. This suggested an approach that used moving averages. For further analysis of the properties of X-11 moving averages, see Cleveland and Tiao (1976).

The basic method was to break up an economic time series into long-term trend, long-term cyclical movements, seasonal movements, and irregular fluctuations.

Early investigators found that it was not possible to uniquely decompose the trend and cycle components. Thus, these two were grouped together; the resulting component is usually referred to as the “trend cycle component.”

It was also found that estimating seasonal components in the presence of trend produced biased estimates of the seasonal components, but, at the same time, estimating trend in the presence of seasonality was difficult. This eventually led to the iterative approach used in the X-11 method.

Two other problems were encountered by early investigators. First, some economic series appear to have changing or evolving seasonality. Secondly, moving averages were very sensitive to extreme values. The estimation method used in the X-11 method allows for evolving seasonal components. For the second problem, the X-11 method uses repeated adjustment of extreme values.

All of these problems encountered in the early investigation of seasonal adjustment methods suggested the use of moving averages in estimating components. Even with the use of moving averages instead of a model-based method, massive amounts of hand calculations were required. Only a small number of series could be adjusted, and little experimentation could be done to evaluate variations on the method.

With the advent of electronic computing in the 1950s, work on seasonal adjustment methods proceeded rapidly. These methods still used the framework previously described; variants of these basic methods could now be easily tested against a large number of series.

Much of the work was done by Julian Shiskin and others at the U.S. Bureau of the Census beginning in 1954 and culminating after a number of variants into the *X-11 Variant of the Census Method II Seasonal Adjustment Program*, which PROC X11 implements.

References for this work during this period include Shiskin and Eisenpress (1957), Shiskin (1958), and Marris (1961). The authoritative documentation for the X-11 Variant is in Shiskin, Young, and Musgrave (1967). This document is not equivalent to a program specification; however, the FORTRAN code that implements the X-11 Variant is in the public domain. A less detailed description of the X-11 Variant is given in U.S. Bureau of the Census (1969).

Development of the X-11-ARIMA Method

The X-11 method uses symmetric moving averages in estimating the various components. At the end of the series, however, these symmetric weights cannot be applied. Either asymmetric weights have to be used, or some method of extending the series must be found.

While various methods of extending a series have been proposed, the most important method to date has been the X-11-ARIMA method developed at Statistics Canada. This method uses Box-Jenkins ARIMA models to extend the series.

The Time Series Research and Analysis Division of Statistics Canada investigated 174 Canadian economic series and found five ARIMA models out of twelve that fit the majority of series well and reduced revisions for the most recent months. References that give details of various aspects of the X-11-ARIMA methodology include Dagum (1980, 1982a, c, 1983, 1988), Laniel (1985), Lothian and Morry (1978a), and Huot et al. (1986).

Differences between X11ARIMA/88 and PROC X11

The original implementation of the X-11-ARIMA method was by Statistics Canada in 1980 (Dagum 1980), with later changes and enhancements made in 1988 (Dagum 1988). The calculations performed by PROC X11 differ from those in X11ARIMA/88, which will result in differences in the final component estimates provided by these implementations.

There are three areas where Statistics Canada made changes to the original X-11 seasonal adjustment method in developing X11ARIMA/80 (Monsell 1984). These are (a) selection of extreme values, (b) replacement of extreme values, and (c) generation of seasonal and trend cycle weights.

These changes have not been implemented in the current version of PROC X11. Thus the procedure produces results identical to those from previous versions of PROC X11 in the absence of an ARIMA statement.

Additional differences can result from the ARIMA estimation. X11ARIMA/88 uses conditional least squares (CLS), while CLS, unconditional least squares (ULS) and maximum likelihood (ML) are all available in PROC X11 by using the METHOD= option in the ARIMA statement. Generally, parameters estimates will differ for the different methods.

Implementation of the X-11 Seasonal Adjustment Method

The following steps describe the analysis of a monthly time series using multiplicative seasonal adjustment. Additional steps used by the X-11-ARIMA method are also indicated. Equivalent descriptions apply for an additive model if you replace *divide* with *subtract* where applicable.

In the multiplicative adjustment, the original series O_t is assumed to be of the form

$$O_t = C_t S_t I_t P_t D_t$$

where C_t is the trend cycle component, S_t is the seasonal component, I_t is the irregular component, P_t is the prior monthly factors component, and D_t is the trading-day component.

The trading-day component can be further factored as

$$D_t = D_{r,t} D_{tr,t},$$

where $D_{tr,t}$ are the trading-day factors derived from the prior daily weights, and $D_{r,t}$ are the residual trading-day factors estimated from the trading-day regression. For further information about estimating trading day variation, see Young (1965).

Additional Steps When Using the X-11-ARIMA Method

The X-11-ARIMA method consists of extending a given series by an ARIMA model and applying the usual X-11 seasonal adjustment method to this extended series. Thus in the simplest case in which there are no prior factors or calendar effects in the series, the ARIMA model selection, estimation, and forecasting are performed first, and the resulting extended series goes through the standard X-11 steps described in the next section.

If prior factor or calendar effects are present, they must be eliminated from the series before the ARIMA estimation is done because these effects are not stochastic.

Prior factors, if present, are removed first. Calendar effects represented by prior daily weights are then removed. If there are no further calendar effects, the adjusted series is extended by the ARIMA model, and this extended series goes through the standard X-11 steps without repeating the removal of prior factors and calendar effects from prior daily weights.

If further calendar effects are present, a trading-day regression must be performed. In this case it is necessary to go through an initial pass of the X-11 steps to obtain a final trading-day adjustment. In this initial pass, the series, adjusted for prior factors and prior daily weights, goes through the standard X-11 steps. At the conclusion of these steps, a final series adjusted for prior factors and all calendar effects is available. This adjusted series is then extended by the ARIMA model, and this extended series goes through the standard X-11 steps again, without repeating the removal of prior factors and calendar effects from prior daily weights and trading-day regression.

The Standard X-11 Seasonal Adjustment Method

The standard X-11 seasonal adjustment method consists of the following steps. These steps are applied to the original data or the original data extended by an ARIMA model.

1. In step 1, the data are read, ignoring missing values until the first nonmissing value is found. If prior monthly factors are present, the procedure reads prior monthly P_t factors and divides them into the original series to obtain $O_t/P_t = C_t S_t I_t D_{tr,t} D_{r,t}$.

Seven daily weights can be specified to develop monthly factors to adjust the series for trading-day variation, $D_{tr,t}$; these factors are then divided into the original or prior adjusted series to obtain $C_t S_t I_t D_{r,t}$.

2. In steps 2, 3, and 4, three iterations are performed, each of which provides estimates of the seasonal S_t , trading-day $D_{r,t}$, trend cycle C_t , and irregular components I_t . Each iteration refines estimates of the extreme values in the irregular components. After extreme values are identified and modified, final estimates of the seasonal component, seasonally adjusted series, trend cycle, and irregular components are produced. Step 2 consists of three substeps:

- a) During the first iteration, a centered, 12-term moving average is applied to the original series O_t to provide a preliminary estimate \hat{C}_t of the trend cycle curve C_t . This moving average combines 13 (a 2-term moving average of a 12-term moving average) consecutive monthly values, removing the S_t and I_t . Next, it obtains a preliminary estimate $\widehat{S_t I_t}$ by

$$\widehat{S_t I_t} = \frac{O_t}{\hat{C}_t}$$

- b) A moving average is then applied to the $\widehat{S}_t \widehat{I}_t$ to obtain an estimate \hat{S}_t of the seasonal factors. $\widehat{S}_t \widehat{I}_t$ is then divided by this estimate to obtain an estimate \hat{I}_t of the irregular component. Next, a moving standard deviation is calculated from the irregular component and is used in assigning a weight to each monthly value for measuring its degree of extremeness. These weights are used to modify extreme values in $\widehat{S}_t \widehat{I}_t$. New seasonal factors are estimated by applying a moving average to the modified value of $\widehat{S}_t \widehat{I}_t$. A preliminary seasonally adjusted series is obtained by dividing the original series by these new seasonal factors. A second estimate of the trend cycle is obtained by applying a weighted moving average to this seasonally adjusted series.
 - c) The same process is used to obtain second estimates of the seasonally adjusted series and improved estimates of the irregular component. This irregular component is again modified for extreme values and then used to provide estimates of trading-day factors and refined weights for the identification of extreme values.
3. Using the same computations, a second iteration is performed on the original series that has been adjusted by the trading-day factors and irregular weights developed in the first iteration. The second iteration produces final estimates of the trading-day factors and irregular weights.
4. A third and final iteration is performed using the original series that has been adjusted for trading-day factors and irregular weights computed during the second iteration. During the third iteration, PROC X11 develops final estimates of seasonal factors, the seasonally adjusted series, the trend cycle, and the irregular components. The procedure computes summary measures of variation and produces a moving average of the final adjusted series.

Sliding Spans Analysis

The motivation for sliding spans analysis is to answer the question, When is a economic series unsuitable for seasonal adjustment? There have been a number of past attempts to answer this question: stable seasonality F test; moving seasonality F test, Q statistics, and others.

Sliding spans analysis attempts to quantify the stability of the seasonal adjustment process, and hence quantify the suitability of seasonal adjustment for a given series.

It is based on a very simple idea: for a stable series, deleting a small number of observations should not result in greatly different component estimates compared with the original, full series. Conversely, if deleting a small number of observations results in drastically different estimates, the series is unstable. For example, a drastic difference in the seasonal factors (Table D10) might result from a dominating irregular component or sudden changes in the seasonally component. When the seasonal component estimates of a series is unstable in this manner, they have little meaning and the series is likely to be unsuitable for seasonal adjustment.

Sliding spans analysis, developed at the Statistical Research Division of the U.S. Census Bureau (Findley et al. 1990; Findley and Monsell 1986), performs a repeated seasonal adjustment on subsets or spans of the full series. In particular, an initial span of the data, typically eight years in length, is seasonally adjusted, and the Tables C18, the trading-day factors (if trading-day regression performed), D10, the seasonal factors, and D11, the seasonally adjusted series are retained for further processing. Next, one year of data is deleted from the beginning of the initial span and one year of data is added. This new span is seasonally adjusted as before, with the same tables retained. This process continues until the end of the data is reached. The beginning and ending dates of the spans are such that the last observation in the original data is also the last observation in the last span. This is discussed in more detail in the following paragraphs.

The following notation for the components or differences computed in the sliding spans analysis follows Findley et al. (1990). The meaning for the symbol $X_t(k)$ is component X in month (or quarter) t , computed from data in the k th span. These components are now defined.

- Seasonal Factors (Table D10): $S_t(k)$
- Trading-Day Factors (Table C18): $TD_t(k)$
- Seasonally Adjusted Data (Table D11): $SA_t(k)$
- Month-to-Month Changes in the Seasonally Adjusted Data: $MM_t(k)$
- Year-to-Year Changes in the Seasonally Adjusted Data: $YY_t(k)$

The key measure is the maximum percent difference across spans. For example, consider a series that begins in January 1972, ends in December 1984, and has four spans, each of length 8 years (see Figure 1 in Findley et al. (1990), p. 346). Consider $S_t(k)$ the seasonal factor (Table D10) for month t for span k , and let N_t denote the number of spans containing month t ; that is,

$$N_t = \{k : \text{span } k \text{ contains month } t\}$$

In the middle years of the series there is overlap of all four spans, and N_t will be 4. The last year of the series will have only one span, while the beginning can have 1 or 0 spans depending on the original length.

Since we are interested in how much the seasonal factors vary for a given month across the spans, a natural quantity to consider is

$$\max_{k \in N_t} S_t(k) - \min_{k \in N_t} S_t(k)$$

In the case of the multiplicative model, it is useful to compute a percentage difference; define the maximum percentage difference (MPD) at time t as

$$MPD_t = \frac{\max_{k \in N_t} S_t(k) - \min_{k \in N_t} S_t(k)}{\min_{k \in N_t} S_t(k)}$$

The seasonal factor for month t is then unreliable if MPD_t is large. While no exact significance level can be computed for this statistic, empirical levels have been established by considering over 500 economic series (Findley et al. 1990; Findley and Monsell 1986). For these series it was found that for four spans, stable series typically had less than 15% of the MPD values exceeding 3.0%, while in marginally stable series, between 15% and 25% of the MPD values exceeded 3.0%. A series in which 25% or more of the MPD values exceeded 3.0% is almost always unstable.

While these empirical values cannot be considered an exact significance level, they provide a useful empirical basis for deciding if a series is suitable for seasonal adjustment. These percentage values are shifted down when fewer than four spans are used.

Computational Details for Sliding Spans Analysis

Length and Number of Spans

The algorithm for determining the length and number of spans for a given series was developed at the U.S. Bureau of the Census, Statistical Research Division. A summary of this algorithm is as follows.

First, an initial length based on the MACURVE *month=option* specification is determined, and then the maximum number of spans possible using this length is determined. If this maximum number exceeds four, set the number of spans to four. If this maximum number is one or zero, there are not enough observations to perform the sliding spans analysis. In this case a note is written to the log and the sliding spans analysis is skipped for this variable.

If the maximum number of spans is two or three, the actual number of spans used is set equal to this maximum. Finally, the length is adjusted so that the spans begin in January (or the first quarter) of the beginning year of the span.

The remainder of this section gives the computation formulas for the maximum percentage difference (MPD) calculations along with the threshold regions.

Seasonal Factors (Table D10)

For the additive model, the MPD is defined as

$$\max_{k \in N_t} S_t(k) - \min_{k \in N_t} S_t(k)$$

For the multiplicative model, the MPD is

$$MPD_t = \frac{\max_{k \in N_t} S_t(k) - \min_{k \in N_t} S_t(k)}{\min_{k \in N_t} S_t(k)}$$

A series for which less than 15% of the MPD values of D10 exceed 3.0% is stable; between 15% and 25% is marginally stable; and greater than 25% is unstable. Span reports S 2.A through S 2.C give the various breakdowns for the number of times the MPD exceeded these levels.

Trading Day Factor (Table C18)

For the additive model, the MPD is defined as

$$\max_{k \in N_t} TD_t(k) - \min_{k \in N_t} TD_t(k)$$

For the multiplicative model, the MPD is

$$MPD_t = \frac{\max_{k \in N_t} TD_t(k) - \min_{k \in N_t} TD_t(k)}{\min_{k \in N_t} TD_t(k)}$$

The U.S. Census Bureau currently gives no recommendation concerning MPD thresholds for the trading-day factors. Span reports S 3.A through S 3.C give the various breakdowns for MPD thresholds. When TDREGR=NONE is specified, no trading-day computations are done, and this table is skipped.

Seasonally Adjusted Data (Table D11)

For the additive model, the MPD is defined as

$$\max_{k \in N_t} SA_t(k) - \min_{k \in N_t} SA_t(k)$$

For the multiplicative model, the MPD is

$$MPD_t = \frac{\max_{k \in N_t} SA_t(k) - \min_{k \in N_t} SA_t(k)}{\min_{k \in N_t} SA_t(k)}$$

A series for which less than 15% of the MPD values of D11 exceed 3.0% is stable; between 15% and 25% is marginally stable; and greater than 25% is unstable. Span reports S 4.A through S 4.C give the various breakdowns for the number of times the MPD exceeded these levels.

Month-to-Month Changes in the Seasonally Adjusted Data

Some additional notation is needed for the month-to-month and year-to-year differences. Define $N1_t$ as

$$N1_t = \{k : \text{span } k \text{ contains month } t \text{ and } t-1\}$$

For the additive model, the month-to-month change for span k is defined as

$$MM_t(k) = SA_t - SA_{t-1}$$

while for the multiplicative model

$$MM_t(k) = \frac{SA_t - SA_{t-1}}{SA_{t-1}}$$

Since this quantity is already in percentage form, the MPD for both the additive and multiplicative model is defined as

$$MPD_t = \max_{k \in N1_t} MM_t(k) - \min_{k \in N1_t} MM_t(k)$$

The current recommendation of the U.S. Census Bureau is that if 35% or more of the MPD values of the month-to-month differences of D11 exceed 3.0%, then the series is usually not stable; 40% exceeding this level clearly marks an unstable series. Span reports S 5.A.1 through S 5.C give the various breakdowns for the number of times the MPD exceeds these levels.

Year-to-Year Changes in the Seasonally Adjusted Data

First define $N12_t$ as

$$N12_t = \{k : \text{span } k \text{ contains month } t \text{ and } t - 12\}$$

(Appropriate changes in notation for a quarterly series are obvious.)

For the additive model, the month-to-month change for span k is defined as

$$YY_t(k) = SA_t - SA_{t-12}$$

while for the multiplicative model

$$YY_t(k) = \frac{SA_t - SA_{t-12}}{SA_{t-12}}$$

Since this quantity is already in percentage form, the MPD for both the additive and multiplicative model is defined as

$$MPD_t = \max_{k \in N1_t} YY_t(k) - \min_{k \in N1_t} YY_t(k)$$

The current recommendation of the U.S. Census Bureau is that if 10% or more of the MPD values of the month-to-month differences of D11 exceed 3.0%, then the series is usually not stable. Span reports S 6.A through S 6.C give the various breakdowns for the number of times the MPD exceeds these levels.

Data Requirements

The input data set must contain either quarterly or monthly time series, and the data must be in chronological order. For the standard X-11 method, there must be at least three years of observations (12 for quarterly time series or 36 for monthly) in the input data sets or in each BY group in the input data set if a BY statement is used.

For the X-11-ARIMA method, there must be at least five years of observations (20 for quarterly time series or 60 for monthly) in the input data sets or in each BY group in the input data set if a BY statement is used.

Missing Values

Missing values at the beginning of a series to be adjusted are skipped. Processing starts with the first nonmissing value and continues until the end of the series or until another missing value is found.

Missing values are not allowed for the DATE= variable. The procedure terminates if missing values are found for this variable.

Missing values found in the PMFACTOR= variable are replaced by 100 for the multiplicative model (default) and by 0 for the additive model.

Missing values can occur in the output data set. If the time series specified in the OUTPUT statement is not computed by the procedure, the values of the corresponding variable are missing. If the time series specified in the OUTPUT statement is a moving average, the values of the corresponding variable are missing for the first n and last n observations, where n depends on the length of the moving average. Additionally, if the time series specified is an irregular component modified for extremes, only the modified values are given, and the remaining values are missing.

Prior Daily Weights and Trading-Day Regression

Suppose that a detailed examination of retail sales at ZXY Company indicates that certain days of the week have higher amounts of sales. In particular, Thursday, Friday, and Saturday have approximately twice the amount of sales as Monday, Tuesday, and Wednesday, and no sales occur on Sunday. This means that months with five Saturdays would have higher amounts of sales than months with only four Saturdays.

This phenomenon is called a calendar effect; it can be handled in PROC X11 by using the PDWEIGHTS (prior daily weights) statement or the TDREGR=option (trading-day regression). The PDWEIGHTS statement and the TDREGR=option can be used separately or together.

If the relative weights are known (as in the preceding) it is appropriate to use the PDWEIGHTS statement. If further residual calendar variation is present, TDREGR=ADJUST should also be used. If you know that a calendar effect is present, but know nothing about the relative weights, use TDREGR=ADJUST without a PDWEIGHTS statement.

In this example, it is assumed that the calendar variation is due to both prior daily weights and residual variation. Thus both a PDWEIGHTS statement and TDREGR=ADJUST are specified.

Note that only the relative weights are needed; in the actual computations, PROC X11 normalizes the weights to sum to 7.0. If a day of the week is not present in the PDWEIGHTS statement, it is given a value of zero. Thus “sun=0” is not needed.

```
proc x11 data=sales;
    monthly date=date tdregr=adjust;
    var sales;
    tables a1 a4 b15 b16 c14 c15 c18 d11;
    pdweights mon=1 tue=1 wed=1 thu=2 fri=2 sat=2;
    output out=x11out a1=a1 a4=a4 b1=b1 c14=c14
                c16=c16 c18=c18 d11=d11;
run;
```

Tables of interest include A1, A4, B15, B16, C14, C15, C18, and D11. Table A4 contains the adjustment factors derived from the prior daily weights; Table C14 contains the extreme irregular values excluded from trading-day regression; Table C15 contains the trading-day-regression results; Table C16 contains the monthly factors derived from the trading-day regression; and Table C18 contains the final trading-day factors derived from the combined daily weights. Finally, Table D11 contains the final seasonally adjusted series.

Adjustment for Prior Factors

Suppose now that a strike at ZXY Company during July and August of 1988 caused sales to decrease an estimated 50%. Since this is a one-time event with a known cause, it is appropriate to prior adjust the data to reflect the effects of the strike. This is done in PROC X11 through the use of `PMFACTOR=varname` (prior monthly factor) in the `MONTHLY` statement.

In the following example, the `PMFACTOR` variable is named `PMF`. Since the estimate of the decrease in sales is 50%, `PMF` has a value of 50.0 for the observations corresponding to July and August 1988, and a value of 100.0 for the remaining observations.

This prior adjustment on `SALES` is performed by replacing `SALES` with the calculated value $(\text{SALES}/\text{PMF}) * 100.0$. A value of 100.0 for `PMF` leaves `SALES` unchanged, while a value of 50.0 for `PMF` doubles `SALES`. This value is the estimate of what `SALES` would have been without the strike. The following example shows how this prior adjustment is accomplished.

```
data sales2;
  set sales;
  if '01jul1988'd <= date <= '01aug1988'd then pmf = 50;
  else pmf = 100;
run;

proc x11 data=sales2;
  monthly date=date pmfactor=pmf;
  var sales;
  tables a1 a2 a3 d11;
  output out=x11out a1=a1 a2=a2 a3=a3 d11=d11;
run;
```

Table A2 contains the prior monthly factors (the values of `PMF`), and Table A3 contains the prior adjusted series.

The YRAHEADOUT Option

For monthly data, the `YRAHEADOUT` option affects only Tables C16 (regression trading-day adjustment factors), C18 (trading-day factors from combined daily weights), and D10 (seasonal factors). For quarterly data, only Table D10 is affected. Variables for all other tables have missing values for the forecast observations. The forecast values for a table are included only if that table is specified in the `OUTPUT` statement.

Tables C16 and C18 are calendar effects that are extrapolated by calendar composition. These factors are independent of the data once trading-day weights have been calculated. Table D10 is extrapolated by a linear combination of past values. If N is the total number of nonmissing observations for the analysis variable, this linear combination is given by

$$D10_t = \frac{1}{2}(3 \times D10_{t-12} - D10_{t-24}), \quad t = N + 1, \dots, N + 12$$

If the input data are monthly time series, 12 extra observations are added to the end of the output data set. (If a BY statement is used, 12 extra observations are added to the end of each BY group.) If the input data are a quarterly time series, four extra observations are added to the end of the output data set. (If a BY statement is used, four extra observations are added to each BY group.)

The DATE= variable (or _DATE_) is extrapolated for the extra observations generated by the YRAHEAD-OUT option, while all other ID variables will have missing values.

If ARIMA processing is requested, and if both the OUTEXTRAP and YRAHEADOUT options are specified in the PROC X11 statement, an additional 12 (or 4) observations are added to the end of output data set for monthly (or quarterly) data after the ARIMA forecasts, using the same linear combination of past values as before.

Effect of Backcast and Forecast Length

Based on a number of empirical studies (Dagum 1982a, b, c; Dagum and Laniel 1987), one year of forecasts minimize revisions when new data become available. Two and three years of forecasts show only small gains.

Backcasting improves seasonal adjustment but introduces permanent revisions at the beginning of the series and also at the end for series of length 8, 9, or 10 years. For series shorter than 7 years, the advantages of backcasting outweigh the disadvantages (Dagum 1988).

Other studies (Pierce 1980; Bobbit and Otto 1990; Buszuwski 1987) suggest “full forecasting”—that is, using enough forecasts to allow symmetric weights for the seasonal moving averages for the most current data. For example, if a 3×9 seasonal moving average was specified for one or more months by using the MACURVES statement, five years of forecasts would be required. This is because the seasonal moving averages are performed on calendar months separately, and the 3×9 is an 11-term centered moving average, requiring five observations before and after the current observation. Thus

```
macurves dec='3x9';
```

would require five additional December values to compute the seasonal moving average.

Details of Model Selection

If an ARIMA statement is present but no MODEL= is given, PROC X11 estimates and forecasts five predefined models and selects the best. This section describes the details of the selection criteria and the selection process.

The five predefined models used by PROC X11 are the same as those used by X11ARIMA/88 from Statistics Canada. These particular models, shown in Table 36.2, were chosen on the basis of testing a large number of economics series (Dagum 1988) and should provide reasonable forecasts for most economic series.

Table 36.2 Five Predefined Models

Model #	Specification	Multiplicative	Additive
1	(0,1,1)(0,1,1)s	log transform	no transform
2	(0,1,2)(0,1,1)s	log transform	no transform
3	(2,1,0)(0,1,1)s	log transform	no transform
4	(0,2,2)(0,1,1)s	log transform	no transform
5	(2,1,2)(0,1,1)s	no transform	no transform

The selection process proceeds as follows. The five models are estimated and one-step-ahead forecasts are produced in the order shown in Table 36.2. As each model is estimated, the following three criteria are checked:

- The mean absolute percent error (MAPE) for the last three years of the series must be less than 15%.
- The significance probability for the Box-Ljung chi-square for up to lag 24 for monthly (8 for quarterly) must greater than 0.05.
- The over-differencing criteria must not exceed 0.9.

The descriptions of these three criteria are given in the section “[Criteria Details](#)” on page 2435. The default values for these criteria are those used by X11ARIMA/88 from Statistics Canada; these defaults can be changed by the MAPECR=, CHICR=, and OVDIFCR= options.

A model that fails any one of these three criteria is excluded from further consideration. In addition, if the ARIMA estimation fails for a given model, a warning is issued, and the model is excluded. The final set of all models considered consists of those that pass all three criteria and are estimated successfully. From this set, the model with the smallest MAPE for the last three years is chosen.

If all five models fail, ARIMA processing is skipped for the variable being processed, and the standard X-11 seasonal adjustment is performed. A note is written to the log with this information.

The chosen model is then used to forecast the series one or more years (determined by the FORECAST= option in the ARIMA statement). These forecasts are appended to the original data (or the prior and calendar-adjusted data).

If a BACKCAST= option is specified, the chosen model form is used, but the parameters are reestimated using the reversed series. Using these parameters, the reversed series is forecast for the number of years specified by the BACKCAST= option. These forecasts are then reversed and appended to the beginning of the original series, or the prior and calendar-adjusted series, to produce the backcasts.

Note that the final selection rule (the smallest MAPE using the last three years) emphasizes the quality of the forecasts at the end of the series. This is consistent with the purpose of the X-11-ARIMA methodology, which is to improve the estimates of seasonal factors and thus minimize revisions to recent past data as new data become available.

Criteria Details

Mean Absolute Percent Error (MAPE)

For the MAPE criteria testing, only the last three years of the original series (or prior and calendar adjusted series) is used in computing the MAPE.

Let y_t , $t = 1, \dots, n$, be the last three years of the series, and denote its one-step-ahead forecast by \hat{y}_t , where $n = 36$ for a monthly series and $n = 12$ for a quarterly series.

With this notation, the MAPE criteria are computed as

$$MAPE = \frac{100}{n} \sum_{t=1}^n \frac{|y_t - \hat{y}_t|}{|y_t|}$$

Box-Ljung Chi-Square

The Box-Ljung chi-square is a lack-of-fit test based on the model residuals. This test statistic is computed using the Ljung-Box formula

$$\chi_m^2 = n(n+2) \sum_{k=1}^m \frac{r_k^2}{(n-k)}$$

where n is the number of residuals that can be computed for the time series, and

$$r_k = \frac{\sum_{t=1}^{n-k} a_t a_{t+k}}{\sum_{t=1}^n a_t^2}$$

where the a_t 's are the residual sequence. This formula has been suggested by Ljung and Box (1978) as yielding a better fit to the asymptotic chi-square distribution. Some simulation studies of the finite sample properties of this statistic are given by Davies, Triggs, and Newbold (1977) and by Ljung and Box (1978).

For monthly series, $m = 24$, while for quarterly series, $m = 8$.

Over-Differencing Test

From Table 36.2 you can see that all models have a single seasonal MA factor and at most two nonseasonal MA factors. Also, all models have seasonal and nonseasonal differencing. Consider model 2 applied to a monthly series y_t with $E(y_t) = \mu$:

$$(1 - B^1)(1 - B^{12})(y_t - \mu) = (1 - \theta_1 B - \theta_2 B^2)(1 - \theta_3 B^{12})a_t$$

If $\theta_3 = 1.0$, then the factors $(1 - \theta_3 B^{12})$ and $(1 - B^{12})$ will cancel, resulting in a lower-order model.

Similarly, if $\theta_1 + \theta_2 = 1.0$,

$$(1 - \theta_1 B - \theta_2 B^2) = (1 - B)(1 - \alpha B)$$

for some $\alpha \neq 0.0$. Again, this results in cancellation and a lower-order model.

Since the parameters are not exact, it is not reasonable to require that

$$\theta_3 < 1.0 \text{ and } \theta_1 + \theta_2 < 1.0$$

Instead, an approximate test is performed by requiring that

$$\theta_3 \leq 0.9 \text{ and } \theta_1 + \theta_2 \leq 0.9$$

The default value of 0.9 can be changed by the OVDIFCR= option. Similar reasoning applies to the other models.

ARIMA Statement Options for the Five Predefined Models

Table 36.3 lists the five predefined models and gives the equivalent MODEL= parameters in a PROC X11 ARIMA statement.

In all models except the fifth, a log transformation is performed before the ARIMA estimation for the multiplicative case; no transformation is performed for the additive case. For the fifth model, no transformation is done for either case.

The multiplicative case is assumed in the following table. The indicated seasonality s in the specification is either 12 (monthly) or 4 (quarterly). The MODEL statement assumes a monthly series.

Table 36.3 ARIMA Statements Options for Predefined Models

Model	ARIMA Statement Options
(0,1,1)(0,1,1) s	MODEL=(Q=1 SQ=1 DIF=1 SDIF=1) TRANSFORM=LOG
(0,1,2)(0,1,1) s	MODEL=(Q=2 SQ=1 DIF=1 SDIF=1) TRANSFORM=LOG
(2,1,0)(0,1,1) s	MODEL=(P=2 SQ=1 DIF=1 SDIF=1) TRANSFORM=LOG
(0,2,2)(0,1,1) s	MODEL=(Q=2 SQ=1 DIF=2 SDIF=1) TRANSFORM=LOG
(2,1,2)(0,1,1) s	MODEL=(P=2 Q=2 SQ=1 DIF=1 SDIF=1)

OUT= Data Set

The OUT= data set specified in the OUTPUT statement contains the BY variables, if any; the ID variables, if any; and the DATE= variable if the DATE= option is given, or _DATE_ if the DATE= option is not specified.

In addition, the variables specified by the option

tablename =var1 var2 ... varn

are placed in the OUT= data set. A list of tables available for monthly and quarterly series is given later, in Table 36.4.

The OUTSPAN= Data Set

The OUTSPAN= option is specified in the PROC statement, and writes the sliding spans results to the specified output data set. The OUTSPAN= data set contains the following variables:

- A1, a numeric variable that is a copy of the original series truncated to the current span. Note that overlapping spans will contain identical values for this variable.
- C18, a numeric variable that contains the trading-day factors for the seasonal adjustment for the current span
- D10, a numeric variable that contains the seasonal factors for the seasonal adjustment for the current span
- D11, a numeric variable that contains the seasonally adjusted series for the current span
- DATE, a numeric variable that contains the date within the current span
- SPAN, a numeric variable that contains the current span. The first span is the earliest span—that is the one with the earliest starting date.
- VARNAME, a character variable containing the name of each variable in the VAR list. A separate sliding spans analysis is performed on each variable in the VAR list.

OUTSTB= Data Set

The output data set produced by the OUTSTB= option of the PROC X11 statement contains the information in the analysis of variance on table D8 (Final Unmodified S-I Ratios). This analysis of variance, following table D8 in the printed output, tests for stable seasonality (Shiskin, Young, and Musgrave 1967, Appendix A). These data contain the following variables:

- VARNAME, a character variable containing the name of each variable in the VAR list
- TABLE, a character variable specifying the table from which the analysis of variance is performed. When ARIMA processing is requested, and two passes of X11 are required (when TDREGR=PRINT, TEST, or ADJUST), Table D8 and the stable seasonality test are computed twice: once in the initial pass, then again in the final pass. Both of these computations are put in the OUTSTB data set and are identified by D18.1 and D18.2, respectively.
- SOURCE, a character variable corresponding to the “source” column in the analysis of variance table following Table D8
- SS, a numeric variable containing the sum of squares associated with the corresponding source term
- DF, a numeric variable containing the degrees of freedom associated with the corresponding source term
- MS, a numeric variable containing the mean square associated with the corresponding source term. MS is missing for the source term “Total”
- F, a numeric variable containing the F statistic for the “Between” source term. F is missing for all other source terms.
- PROBF, a numeric variable containing the significance level for the F statistic. PROBF is missing for the source terms “Total” and “Error.”

OUTTDR= Data Set

The trading-day regression results (tables B15 and C15) are written to the OUTTDR= data set, which contains the following variables:

- VARNAME, a character variable containing the name of the VAR variable being processed
- TABLE, a character variable containing the name of the table. It can have only the value B15 (Preliminary Trading-Day Regression) or C15 (Final Trading-Day Regression).
- _TYPE_, a character variable whose value distinguishes the three distinct table format types. These types are (a) the regression, (b) the listing of the standard error associated with length-of-month, and (c) the analysis of variance. The first seven observations in the OUTTDR data set correspond to the

regression on days of the week; thus the `_TYPE_` variable is given the value “REGRESS” (day-of-week regression coefficient). The next four observations correspond to 31-, 30-, 29-, and 28-day months and are given the value `_TYPE_=LOM_STD` (length-of-month standard errors). Finally, the last three observations correspond to the analysis of variance table, and `_TYPE_=ANOVA`.

- `PARM`, a character variable, further identifying the nature of the observation. `PARM` is set to blank for the three `_TYPE_=ANOVA` observations.
- `SOURCE`, a character variable containing the source in the regression. This variable is missing for all `_TYPE_=REGRESS` and `LOM_STD`.
- `CWGT`, a numeric variable containing the combined trading-day weight (prior weight + weight found from regression). The variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `PRWGT`, a numeric variable containing the prior weight. The prior weight is 1.0 if `PDWEIGHTS` are not specified. This variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `COEFF`, a numeric variable containing the calculated regression coefficient for the given day. This variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `STDERR`, a numeric variable containing the standard errors. For observations with `_TYPE_=REGRESS`, this is the standard error corresponding to the regression coefficient. For observations with `_TYPE_=LOM_STD`, this is standard error for the corresponding length-of-month. This variable is missing for all `_TYPE_=ANOVA`.
- `T1`, a numeric variable containing the t statistic corresponding to the test that the combined weight is different from the prior weight. This variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `T2`, a numeric variable containing the t statistic corresponding to the test that the combined weight is different from 1.0. This variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `PROBT1`, a numeric variable containing the significance level for t statistic `T1`. The variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `PROBT2`, a numeric variable containing the significance level for t statistic `T2`. The variable is missing for all `_TYPE_=LOM_STD` and `_TYPE_=ANOVA`.
- `SS`, a numeric variable containing the sum of squares associated with the corresponding source term. This variable is missing for all `_TYPE_=REGRESS` and `LOM_STD`.
- `DF`, a numeric variable containing the degrees of freedom associated with the corresponding source term. This variable is missing for all `_TYPE_=REGRESS` and `LOM_STD`.
- `MS`, a numeric variable containing the mean square associated with the corresponding source term. This variable is missing for the source term ‘Total’ and for all `_TYPE_=REGRESS` and `LOM_STD`.
- `F`, a numeric variable containing the F statistic for the ‘Regression’ source term. The variable is missing for the source terms ‘Total’ and ‘Error’, and for all `_TYPE_=REGRESS` and `LOM_STD`.
- `PROBF`, a numeric variable containing the significance level for the F statistic. This variable is missing for the source term ‘Total’ and ‘Error’ and for all `_TYPE_=REGRESS` and `LOM_STD`.

Printed Output

The output from PROC X11, both printed tables and the series written to the OUT= data set, depends on whether the data are monthly or quarterly. For the printed tables, the output depends further on the value of the PRINTOUT= option and the TABLE statement, along with other options specified.

The printed output is organized into tables identified by a part letter and a sequence number within the part. The seven major parts of the X11 procedure are as follows:

A	prior adjustments (optional)
B	preliminary estimates of irregular component weights and regression trading-day factors
C	final estimates of irregular component weights and regression trading-day factors
D	final estimates of seasonal, trend cycle, and irregular components
E	analytical tables
F	summary measures
G	charts

Table 36.4 describes the individual tables and charts. Most tables apply both to quarterly and monthly series. Those that apply only to a monthly time series are indicated by an “M” in the notes section, while “P” indicates the table is not a time series, and is only printed, not output to the OUT= data set.

Table 36.4 Table Names and Descriptions

Table	Description	Notes
A1	original series	M
A2	prior monthly adjustment factors	M
A3	original series adjusted for prior monthly factors	M
A4	prior trading-day adjustments	M
A5	prior adjusted or original series	M
A13	ARIMA forecasts	
A14	ARIMA backcasts	
A15	prior adjusted or original series extended by ARIMA backcasts and forecasts	
B1	prior adjusted or original series	
B2	trend cycle	
B3	unmodified seasonal-irregular (S-I) ratios	
B4	replacement values for extreme S-I ratios	
B5	seasonal factors	
B6	seasonally adjusted series	
B7	trend cycle	
B8	unmodified S-I ratios	
B9	replacement values for extreme S-I ratios	
B10	seasonal factors	
B11	seasonally adjusted series	

Table 36.4 *continued*

Table	Description	Notes
B13	irregular series	
B14	extreme irregular values excluded from trading-day regression	M
B15	preliminary trading-day regression	M,P
B16	trading-day adjustment factors	M
B17	preliminary weights for irregular components	
B18	trading-day factors derived from combined daily weights	M
B19	original series adjusted for trading-day and prior variation	M
C1	original series modified by preliminary weights and adjusted for trading-day and prior variation	
C2	trend cycle	
C4	modified S-I ratios	
C5	seasonal factors	
C6	seasonally adjusted series	
C7	trend cycle	
C9	modified S-I ratios	
C10	seasonal factors	
C11	seasonally adjusted series	
C13	irregular series	
C14	extreme irregular values excluded from trading-day regression	M
C15	final trading-day regression	M,P
C16	final trading-day adjustment factors derived from regression coefficients	M
C17	final weight for irregular components	
C18	final trading-day factors derived from combined daily weights	M
C19	original series adjusted for trading-day and prior variation	M
D1	original series modified for final weights and adjusted for trading-day and prior variation	
D2	trend cycle	
D4	modified S-I ratios	
D5	seasonal factors	
D6	seasonally adjusted series	
D7	trend cycle	
D8	final unmodified S-I ratios	
D9	final replacement values for extreme S-I ratios	
D10	final seasonal factors	
D11	final seasonally adjusted series	
D12	final trend cycle	
D13	final irregular series	
E1	original series with outliers replaced	
E2	modified seasonally adjusted series	
E3	modified irregular series	
E4	ratios of annual totals	P
E5	percent changes in original series	
E6	percent changes in final seasonally adjusted series	
F1	MCD moving average	

Table 36.4 *continued*

Table	Description	Notes
F2	summary measures	P
G1	chart of final seasonally adjusted series and trend cycle	P
G2	chart of S-I ratios with extremes, S-I ratios without extremes, and final seasonal factors	P
G3	chart of S-I ratios with extremes, S-I ratios without extremes, and final seasonal factors in calendar order	P
G4	chart of final irregular and final modified irregular series	P

The PRINTOUT= Option

The PRINTOUT= option controls printing for groups of tables. See the “[TABLES Statement](#)” on page 2422 for details on specifying individual tables. The following list gives the tables printed for each value of the PRINTOUT= option:

STANDARD (26 tables)	A1–A4, B1, C13–C19, D8–D13, E1–E6, F1, F2
LONG (40 tables)	A1–A5, A13–A15, B1, B2, B7, B10, B13–B15, C1, C7, C10, C13–C19, D1, D7–D11, D13, E1–E6, F1, F2
FULL (62 tables)	A1–A5, A13–A15, B1–B11, B13–B19, C1–C11, C13–C19, D1, D2, D4–D12, E1–E6, F1, F2

The actual number of tables printed depends on the options and statements specified. If a table is not computed, it is not printed. For example, if TDREGR=NONE is specified, none of the tables associated with the trading-day are printed.

The CHARTS= Option

Of the four charts listed in [Table 36.4](#), G1 and G2 are printed by default (CHARTS=STANDARD). Charts G3 and G4 are printed when CHARTS=FULL is specified. See the “[TABLES Statement](#)” on page 2422 for details on specifying individual charts.

Stable, Moving, and Combined Seasonality Tests on the Final Unmodified SI Ratios (Table D8)

PROC X11 displays four tests used to identify stable seasonality and moving seasonality and to measure identifiable seasonality. These tests are displayed after Table D8. They are “Stable Seasonality Test,” “Moving Seasonality Test,” “Nonparametric Test for the Presence of Seasonality Assuming Stability,” and “Summary of Results and Combined Test for the Presence of Identifiable Seasonality.” The motivation, interpretation, and statistical details of all these tests are now given.

Motivation

The seasonal component of this time series, S_t , is defined as the intrayear variation that is repeated constantly (stable) or in an evolving fashion from year to year (moving seasonality). If the increase in the seasonal factors from year to year is too large, then the seasonal factors will introduce distortion into the model. It is important to determine if seasonality is identifiable without distorting the series.

To determine if stable seasonality is present in a series, PROC X11 computes a one-way analysis of variance by using the seasons (months or quarters) as the factor on the Final Unmodified SI Ratios (Table D8). This is the appropriate table to use because the removal of the trend cycle is equivalent to detrending. PROC X11 prints this test, labeled “Stable Seasonality Test,” immediately after the Table D8.

The X11 seasonal adjustment method tests for moving seasonality. Moving seasonality can be a source of distortion when seasonal factors are used in the model. PROC X11 computes and prints a test for moving seasonality. The test is a two-way analysis of variance that uses months (or quarters) and years. As in the “Stable Seasonality Test,” this analysis of variance is performed on the Final Unmodified SI Ratios (Table D8). PROC X11 prints this test, labeled “Moving Seasonality Test,” after the “Stable Seasonality Test.”

PROC X11 next computes a nonparametric Kruskal-Wallis chi-squared test for stable seasonality, “Nonparametric Test for the Presence of Seasonality Assuming Stability.” The Kruskal-Wallis test is performed on the ranks of the Final Unmodified SI Ratios (Table D8). For further details about the Kruskal-Wallis test, see Lehmann (1998, pp. 204–210).

The results of the preceding three tests are combined into a joint test to measure identifiable seasonality, “Summary of Results and Combined Test for the Presence of Identifiable Seasonality.” This test combines the two F tests previously described, along with the Kruskal-Wallis chi-squared test for stable seasonality, to determine “identifiable” seasonality. This test is printed after “Nonparametric Test for the Presence of Seasonality Assuming Stability.”

Interpretation and Statistical Details

The “Stable Seasonality Test” is a one-way analysis of variance on the “Final Unmodified SI Ratios” with seasons (months or quarters) as the factor.

To determine whether stable seasonality is present in a series, PROC X11 computes a one-way analysis of variance by using the seasons (months or quarters) as the factor on the Final Unmodified SI Ratios (Table D8). This is the appropriate table to use because the removal of the trend cycle is similar to detrending.

A large F statistic and a small significance level are evidence that a significant amount of variation in the SI-ratios is due to months or quarters, which in turn is evidence of seasonality; the null hypothesis of no month/quarter effect is rejected.

Conversely, a small F statistic and a large significance level (close to 1.0) are evidence that variation due to month or quarter could be due to random error, and the null hypothesis of no month/quarter effect is not rejected. The interpretation and utility of seasonal adjustment are problematic under such conditions.

The F test for moving seasonality is performed by a two-way analysis of variance. The two factors are seasons (months or quarters) and years. The years effect is tested separately; the null hypothesis is no effect due to years after accounting for variation due to months or quarters. For further details about the moving seasonality test, see Lothian (1984a, b, 1978) and Higginson (1975).

The significance level reported in both the moving and stable seasonality tests are only approximate. Table D8, the Final Unmodified SI Ratios, is constructed from an averaging operation that induces a correlation in the residuals from which the F test is computed. Hence the computed F statistic differs from an exact F statistic; see Cleveland and Devlin (1980) for details.

The test for identifiable seasonality is performed by combining the F tests for stable and moving seasonality, along with a Kruskal-Wallis test for stable seasonality. The following description is based on Lothian and Morry (1978b); other details can be found in Dagum (1988, 1983).

Let F_s and F_m denote the F value for the stable and moving seasonality tests, respectively. The combined test is performed as shown in Table 36.5 and as follows:

1. If the null hypothesis of no stable seasonality is not rejected at the 0.10% significance level ($P_S \geq 0.001$), then the series is considered to be nonseasonal. PROC X11 returns the conclusion, “Identifiable Seasonality Not Present.”
2. If the null hypothesis in step 1 is rejected, then PROC X11 computes the following quantities:

$$T_1 = \frac{7}{F_m}$$

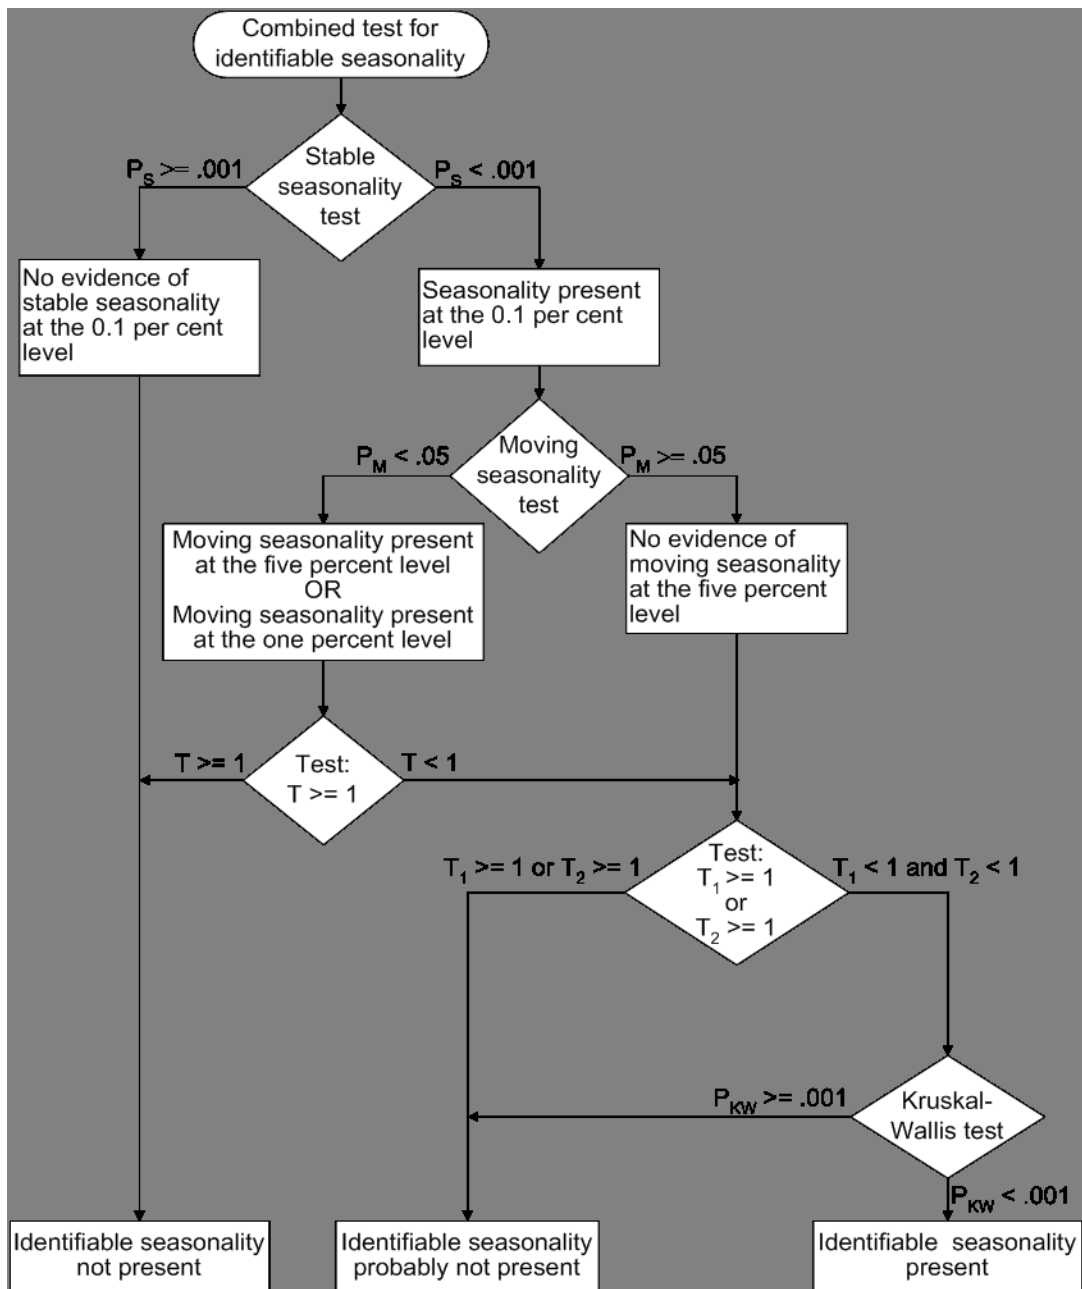
$$T_2 = \frac{3F_m}{F_s}$$

Let T denote the simple average of T_1 and T_2 :

$$T = \frac{(T_1 + T_2)}{2}$$

If the null hypothesis of no moving seasonality is rejected at the 5.0% significance level ($P_M < 0.05$) and if $T \geq 1.0$, the null hypothesis of identifiable seasonality *not* present is not rejected and PROC X11 returns the conclusion, “Identifiable Seasonality Not Present.”

3. If the null hypothesis of identifiable seasonality *not* present has not been accepted, but $T_1 \geq 1.0$, $T_2 \geq 1.0$, or the Kruskal-Wallis chi-squared test fails to reject at the 0.10% significance level ($P_{KW} \geq 0.001$), then PROC X11 returns the conclusion “Identifiable Seasonality Probably Not Present.”
4. If the null hypotheses of no stable seasonality associated with the F_s and Kruskal-Wallis chi-squared tests are rejected and if none of the combined measures described in steps 2 and 3 fail, then the null hypothesis of identifiable seasonality *not* present is rejected and PROC X11 returns the conclusion “Identifiable Seasonality Present.”

Figure 36.5 Combined Seasonality Test Flowchart

Tables Written to the OUT= Data Set

All tables that are time series can be written to the OUT= data set. However, depending on the specified options and statements, not all tables are computed. When a table is not computed, but is requested in the OUTPUT statement, the resulting variable has all missing values.

For example, if the PMFACTOR= option is not specified, Table A2 is not computed, and requesting this table in the OUTPUT statement results in the corresponding variable having all missing values.

The trading-day regression results, Tables B15 and C15, although not written to the OUT= data set, can be written to an output data set; see the OUTTDR= option for details.

Printed Output Generated by Sliding Spans Analysis

Table S 0.A

Table S 0.A gives the variable name, the length and number of spans, and the beginning and ending dates of each span.

Table S 0.B

Table S 0.B gives the summary of the two F tests performed during the standard X11 seasonal adjustments for stable and moving seasonality on Table D8, the final SI ratios. These tests are described in the section “Printed Output” on page 2440.

Table S 1.A

Table S 1.A gives the range analysis of seasonal factors. This includes the means for each month (or quarter) within a span, the maximum percentage difference across spans for each month, and the average. The minimum and maximum within a span are also indicated.

For example, for a monthly series and an analysis with four spans, the January row would contain a column for each span, with the value representing the average seasonal factor (Table D10) over all January calendar months occurring within the span. Beside each span column is a character column with either a MIN, MAX, or blank value, indicating which calendar month had the minimum and maximum value over that span.

Denote the average over the j th calendar month in span k , $k = 1, \dots, 4$, by $\bar{S}_j(k)$; then the maximum percent difference (MPD) for month j is defined by

$$MPD_j = \frac{\max_{k=1,\dots,4} \bar{S}_j(k) - \min_{k=1,\dots,4} \bar{S}_j(k)}{\min_{k=1,\dots,4} \bar{S}_j(k)}$$

The last numeric column of Table S 1.A is the average value over all spans for each calendar month, with the minimum and maximum row flagged as in the span columns.

Table S 1.B

Table S 1.B gives a summary of range measures for each span. The first column, Range Means, is calculated by computing the maximum and minimum over all months or quarters in a span, then taking the difference. The next column is the range ratio means, which is simply the ratio of the previously described maximum and minimum. The next two columns are the minimum and maximum seasonal factors over the entire span, while the range sf column is the difference of these. Finally, the last column is the ratio of the Max SF and Min SF columns.

Breakdown Tables

Table S 2.A.1 begins the breakdown analysis for the various series considered in the sliding spans analysis. The key concept here is the MPD described above in the section “Table S 1.A” on page 2446 and in the section “Computational Details for Sliding Spans Analysis” on page 2428. For a month or quarter that appears in two or more spans, the maximum percentage difference is computed and tested against a cutoff level. If it exceeds this cutoff, it is counted as an instance of exceeding the level. It is of interest to see if such instances fall disproportionately in certain months and years. Tables S 2.A.1 through S 6.A.3 display this breakdown for all series considered.

Table S 2.A.1

Table S 2.A.1 gives the monthly (quarterly) breakdown for the seasonal factors (table D10). The first column identifies the month or quarter. The next column is the number of times the MPD for D10 exceeded 3.0%, followed by the total count. The last is the average maximum percentage difference for the corresponding month or quarter.

Table S 2.A.2

Table S 2.A.2 gives the same information as Table S 2.A.1, but on a yearly basis.

Table S 2.A.3

The description of Table S 2.A.3 requires the definition of “Sign Change” and “Turning Point.”

First, some motivation. Recall that for a highly stable series, adding or deleting a small number of observations should not affect the estimation of the various components of a seasonal adjustment procedure.

Consider Table D10, the seasonal factors in a sliding spans analysis that uses four spans. For a given observation t , looking across the four spans, we can easily pick out large differences if they occur. More subtle differences can occur when estimates go from above to below (or vice versa) a base level. In the case of multiplicative model, the seasonal factors have a base level of 100.0. So it is useful to enumerate those instances where both a large change occurs (an MPD value exceeding 3.0%) and a change of sign (with respect to the base) occur.

Let B denote the base value (which in general depends on the component being considered and the model type, multiplicative or additive). If, for span 1, $S_t(1)$ is below B (i.e., $S_t(1) - B$ is negative) and for some subsequent span k , $S_t(k)$ is above B (i.e., $S_t(k) - B$ is positive), then a positive “Change in Sign” has occurred at observation t . Similarly, if, for span 1, $S_t(1)$ is above B , and for some subsequent span k , $S_t(k)$

is below B , then a negative “Change in Sign” has occurred. Both cases, positive or negative, constitute a “Change in Sign”; the actual direction is indicated in tables S 7.A through S 7.E, which are described below.

Another behavior of interest occurs when component estimates increase then decrease (or vice versa) across spans for a given observation. Using the preceding example, the seasonal factors at observation t could first increase, then decrease across the four spans.

This behavior, combined with an MPD exceeding the level, is of interest in questions of stability.

Again, consider Table D10, the seasonal factors in a sliding spans analysis that uses four spans. For a given observation t (containing at least three spans), note the level of D10 for the first span. Continue across the spans until a difference of 1.0% or greater occurs (or no more spans are left), noting whether the difference is up or down. If the difference is up, continue until a difference of 1.0% or greater occurs downward (or no more spans are left). If such an up-down combination occurs, the observation is counted as an up-down turning point. A similar description occurs for a down-up turning point. Tables S 7.A through S 7.E, described below, show the occurrence of turning points, indicating whether up-down or down-up. Note that it requires at least three spans to test for a turning point. Hence Tables S 2.A.3 through S 6.A.3 show a reduced number in the “Turning Point” row for the “Total Tested” column, and in Tables S 7.A through S 7.E, the turning points symbols can occur only where three or more spans overlap.

With these descriptions of sign change and turning point, we now describe Table S 2.A.3. The first column gives the type or category, the second column gives the total number of observations falling into the category, the third column gives the total number tested, and the last column gives the percentage for the number found in the category.

The first category (row) of the table is for flagged observations—that is, those observations where the MPD exceeded the appropriate cutoff level (3.0% is default for the seasonal factors). The second category is for level changes, while the third category is for turning points. The fourth category is for flagged sign changes—that is, for those observations that are sign changes, how many are also flagged. Note the total tested column for this category equals the number found for sign change, reflecting the definition of the fourth category.

The fifth column is for flagged turning points—that is, for those observations that are turning points, how many are also flagged.

The footnote to Table S 2.A.3 gives the U.S. Census Bureau recommendation for thresholds, as described in the section “Computational Details for Sliding Spans Analysis” on page 2428.

Table S 2.B

Table S 2.B gives the histogram of flagged for seasonal factors (Table D10) using the appropriate cutoff value (default 3.0%). This table looks at the spread of the number of times the MPD exceeded the corresponding level. The range is divided up into four intervals: 3.0%–4.0%, 4.0%–5.0%, 5.0%–6.0%, and greater than 6.0%. The first column shows the symbol used in Table S 7.A, the second column gives the range in interval notation, and the last column gives the number found in the corresponding interval. Note that the sum of the last column should agree with the “Number Found” column of the “Flagged MPD” row in Table S 2.A.3.

Table S 2.C

Table S 2.C gives selected percentiles for the MPD for the seasonal factors (Table D10).

Tables S 3.A.1 through S 3.A.3

These tables relate to the trading-day factors (Table C18) and follow the same format as Tables S 2.A.1 through S 2.A.3. The only difference between these tables and Tables S 2.A.1 through S 2.A.3 is the default cutoff value of 2.0% instead of the 3.0% used for the seasonal factors.

Tables S 3.B, S 3.C

These tables, applied to the trading-day factors (Table C18), are the same format as Tables S 2.B through S 2.C. The default cutoff value is different, with corresponding differences in the intervals in S 3.B.

Tables S 4.A.1 through S 4.A.3

These tables relate to the seasonally adjusted series (Table D11) and follow the same format as Tables S 2.A.1 through S 2.A.3. The same default cutoff value of 3.0% is used.

Tables S 4.B, S 4.C

These tables, applied to the seasonally adjusted series (Table D11), are the same format as tables S 2.B through S 2.C.

Tables S 5.A.1 through S 5.A.3

These tables relate to the month-to-month (or quarter-to-quarter) differences in the seasonally adjusted series, and follow the same format as Tables S 2.A.1 through S 2.A.3. The same default cutoff value of 3.0% is used.

Tables S 5.B, S 5.C

These tables, applied to the month-to-month (or quarter-to-quarter) differences in the seasonally adjusted series, are the same format as tables S 2.B through S 2.C. The same default cutoff value of 3.0% is used.

Tables S 6.A.1 through S 6.A.3

These tables relate to the year-to-year differences in the seasonally adjusted series, and follow the same format as Tables S 2.A.1 through S 2.A.3. The same default cutoff value of 3.0% is used.

Tables S 6.B, S 6.C

These tables, applied to the year-to-year differences in the seasonally adjusted series, are the same format as tables S 2.B through S 2.C. The same default cutoff value of 3.0% is used.

Table S 7.A

Table S 7.A gives the entire listing of the seasonal factors (Table D10) for each span. The first column gives the date for each observation included in the spans. Note that the dates do not cover the entire original data set. Only those observations included in one or more spans are listed.

The next N columns (where N is the number of spans) are the individual spans starting at the earliest span. The span columns are labeled by their beginning and ending dates.

Following the last span is the “Sign Change” column. As explained in the description of Table S 2.A.3, a sign change occurs at a given observation when the seasonal factor estimates go from above to below, or below to above, a base level. For the seasonal factors, 100.0 is the base level for the multiplicative model, 0.0 for the additive model. A blank value indicates no sign change, a “U” indicates a movement “upward” from the base level and a “D” indicates a movement “downward” from the base level.

The next column is the “Turning Point” column. As explained in the description of Table S 2.A.3, a turning point occurs when there is an upward then downward movement, or downward then upward movement, of sufficient magnitude. A blank value indicates no turning point, a “U-D” indicates a movement “upward then downward,” and a “D-U” indicates a movement “downward then upward.”

The next column is the maximum percentage difference (MPD). This quantity, described in the section “Computational Details for Sliding Spans Analysis” on page 2428, is the main computation for sliding spans analysis. A measure of how extreme the MPD value is given in the last column, the “Level of Excess” column. The symbols used and their meaning are described in Table S 2.A.3. If a given observation has exceeded the cutoff, the level of excess column is blank.

Table S 7.B

Table S 7.B gives the entire listing of the trading-day factors (Table C18) for each span. The format of this table is exactly like that of Table S 7.A.

Table S 7.C

Table S 7.C gives the entire listing of the seasonally adjusted data (Table D11) for each span. The format of this table is exactly like that of Table S 7.A except for the “Sign Change” column, which is not printed. The seasonally adjusted data have the same units as the original data; there is no natural base level as in the case of a percentage. Hence the sign change is not appropriate for D11.

Table S 7.D

Table S 7.D gives the entire listing of the month-to-month (or quarter-to-quarter) changes in seasonally adjusted data for each span. The format of this table is exactly like that of Table S 7.A.

Table S 7.E

Table S 7.E gives the entire listing of the year-to-year changes in seasonally adjusted data for each span. The format of this table is exactly like that of Table S 7.A.

Printed Output from the ARIMA Statement

The information printed by default for the ARIMA model includes the parameter estimates, their approximate standard errors, t ratios, and variances, the standard deviation of the error term, and the AIC and SBC statistics for the model. In addition, a criteria summary for the chosen model is given that shows the values for each of the three test criteria and the corresponding critical values.

If the PRINTALL option is specified, a summary of the nonlinear estimation optimization and a table of Box-Ljung statistics is also produced. If the automatic model selection is used, this information is printed for each of the five predefined models. Finally, a model selection summary is printed, showing the final model chosen.

ODS Table Names

PROC X11 assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table.

NOTE: For monthly and quarterly tables, use the ODS names MonthlyTables and QuarterlyTables; For brevity, only the MonthlyTables are listed here; the QuarterlyTables are simply duplicates. Printing of individual tables can be specified by using the TABLES table_name, which is not listed here. Printing groups of tables is specified in the MONTHLY and QUARTERLY statements by specifying the option PRINTOUT=NONE|STANDARD|LONG|FULL. The default is PRINTOUT=STANDARD.

Table 36.5 ODS Tables Produced in PROC X11

ODS Table Name	Description	Option
ODS Tables Created by the MONTHLY and QUARTERLY Statements		
Preface	X11 Seasonal Adjustment Program information giving credits, dates, and so on	always printed unless NOPRINT
A1	Table A1: original series	
A2	Table A2: prior monthly	
A3	Table A3: original series adjusted for prior monthly factors	
A4	Table A4: prior trading day adjustment factors with and without length of month adjustment	
A5	Table A5: original series adjusted for priors	
B1	Table B1: original series or original series adjusted for priors	
B2	Table B2: trend cycle—centered nn-term moving average	
B3	Table B3: unmodified SI ratios	

Table 36.5 *continued*

ODS Table Name	Description	Option
B4	Table B4: replacement values for extreme SI ratios	
B5	Table B5: seasonal factors	
B6	Table B6: seasonally adjusted series	
B7	Table B7: trend cycle—Henderson curve	
B8	Table B8: unmodified SI ratios	
B9	Table B9: replacement values for extreme SI ratios	
B10	Table B10: seasonal factors	
B11	Table B11: seasonally adjusted series	
B13	Table B13: irregular series	
B15	Table B15: preliminary trading day regression	
B16	Table B16: trading day adjustment factors derived from regression	
B17	Table B17: preliminary weights for irregular component	
B18	Table B18: trading day adjustment factors from combined weights	
B19	Table B19: original series adjusted for preliminary combined trading day weights	
C1	Table C1: original series adjusted for preliminary weights	
C2	Table C2: trend cycle—centered nn-term moving average	
C4	Table C4: modified SI ratios	
C5	Table C5: seasonal factors	
C6	Table C6: seasonally adjusted series	
C7	Table C7 trend cycle—Henderson curve	
C9	Table C9: modified SI ratios	
C10	Table C10: seasonal factors	
C11	Table C11: seasonally adjusted series	
C13	Table C13: irregular series	
C15	Table C15: final trading day regression	
C16	Table C16: trading day adjustment factors derived from regression	
C17	Table C17: final weights for irregular component	
C18	Table C18: trading day adjustment factors from combined weights	
C19	Table C19: original series adjusted for final combined trading day weights	
D1	Table D1: original series adjusted for final weights nn-term moving average	
D4	Table D4: modified SI ratios	

Table 36.5 *continued*

ODS Table Name	Description	Option
D5	Table D5: seasonal factors	
D6	Table D6: seasonally adjusted series	
D7	Table D7: trend cycle—Henderson curve	
D8	Table D8: final unmodified SI ratios	
D10	Table D10: final seasonal factors	
D11	Table D11: final seasonally adjusted series	
D12	Table D12: final trend cycle—Henderson curve	
D13	Table D13: final irregular series	
E1	Table E1: original series modified for extremes	
E2	Table E2: modified seasonally adjusted series	
E3	Table E3: modified irregular series	
E5	Table E5: month-to-month changes in original series	
E6	Table E6: month-to-month changes in final seasonally adjusted series	
F1	Table F1: MCD moving average	
A13	Table A13: ARIMA forecasts	ARIMA statement
A14	Table A14: ARIMA backcasts	ARIMA statement
A15	Table A15: ARIMA extrapolation	ARIMA statement
B14	Table B14: irregular values excluded from trading day regression	
C14	Table C14: irregular values excluded from trading day regression	
D9	Table D9: final replacement values	
PriorDailyWgts	adjusted prior daily weights	
TDR_0	final/preliminary trading day regression, part 1	MONTHLY only, TDREGR=ADJUST, TEST
TDR_1	final/preliminary trading day regression, part 2	MONTHLY only, TDREGR=ADJUST, TEST
StandErrors	standard errors of trading day adjustment factors	MONTHLY only, TDREGR=ADJUST, TEST
D9A	year-to-year change in irregular and seasonal components and moving seasonality ratio	

Table 36.5 *continued*

ODS Table Name	Description	Option
StableSeasTest	stable seasonality test	
StableSeasFTest	moving seasonality test	
KruskalWallisTest	nonparametric test for the presence of seasonality assuming stability	
CombinedSeasonalityTest	summary of results and combined test for the presence of identifiable seasonality	
f2a	F2 summary measures, part 1	
f2b	F2 summary measures, part 2	
f2c	F2 summary measures, part 3	
f2d	I/C ratio for monthly/quarterly span	
f2f	average % change with regard to sign and standard deviation over span	
E4	differences or ratios of annual totals for original and adjusted series	
ChartG1	chart G1	
ChartG2	chart G2	
ODS Tables Created by the ARIMA Statement		
CriteriaSummary	criteria summary	ARIMA statement
ConvergeSummary	convergence summary	
ArimaEst	ARIMA estimation results, part 1	
ArimaEst2	ARIMA estimation results, part 2	
Model_Summary	model summary	
Ljung_BoxQ	table of Ljung-Box Q statistics	
A13	Table A13: ARIMA forecasts	
A14	Table A14: ARIMA backcasts	
A15	Table A15: ARIMA extrapolation	
ODS Tables Created by the SSPAN Statement		
SPR0A_1	S 0.A sliding spans analysis, number, length of spans	default printing
SpanDates	S 0.A sliding spans analysis: dates of spans	
SPR0B	S 0.B summary of F tests for stable and moving seasonality	
SPR1_1	S 1.A range analysis of seasonal factors	
SPR1_b	S 1.B summary of range measures	
SPRXA	2XA.1 breakdown of differences by month or quarter	
SPRXB_2	S X.B histogram of flagged observations	

Table 36.5 *continued*

ODS Table Name	Description	Option
SPRXA_2	S X.A.2 breakdown of differences by year	
MpdStats	S X.C: statistics for maximum percentage differences	
S_X_A_3	S 2.X.3 breakdown summary of flagged observations	
SPR7_X	S 7.X sliding spans analysis	PRINTALL

Examples: X11 Procedure

Example 36.1: Component Estimation—Monthly Data

This example computes and plots the final estimates of the individual components for a monthly series. In the first plot ([Output 36.1.1](#)), an overlaid plot of the original and seasonally adjusted data is produced. The trend in the data is more evident in the seasonally adjusted data than in the original data. This trend is even more clear in [Output 36.1.3](#), the plot of Table D12, the trend cycle. Note that both the seasonal factors and the irregular factors vary around 100, while the trend cycle and the seasonally adjusted data are in the scale of the original data.

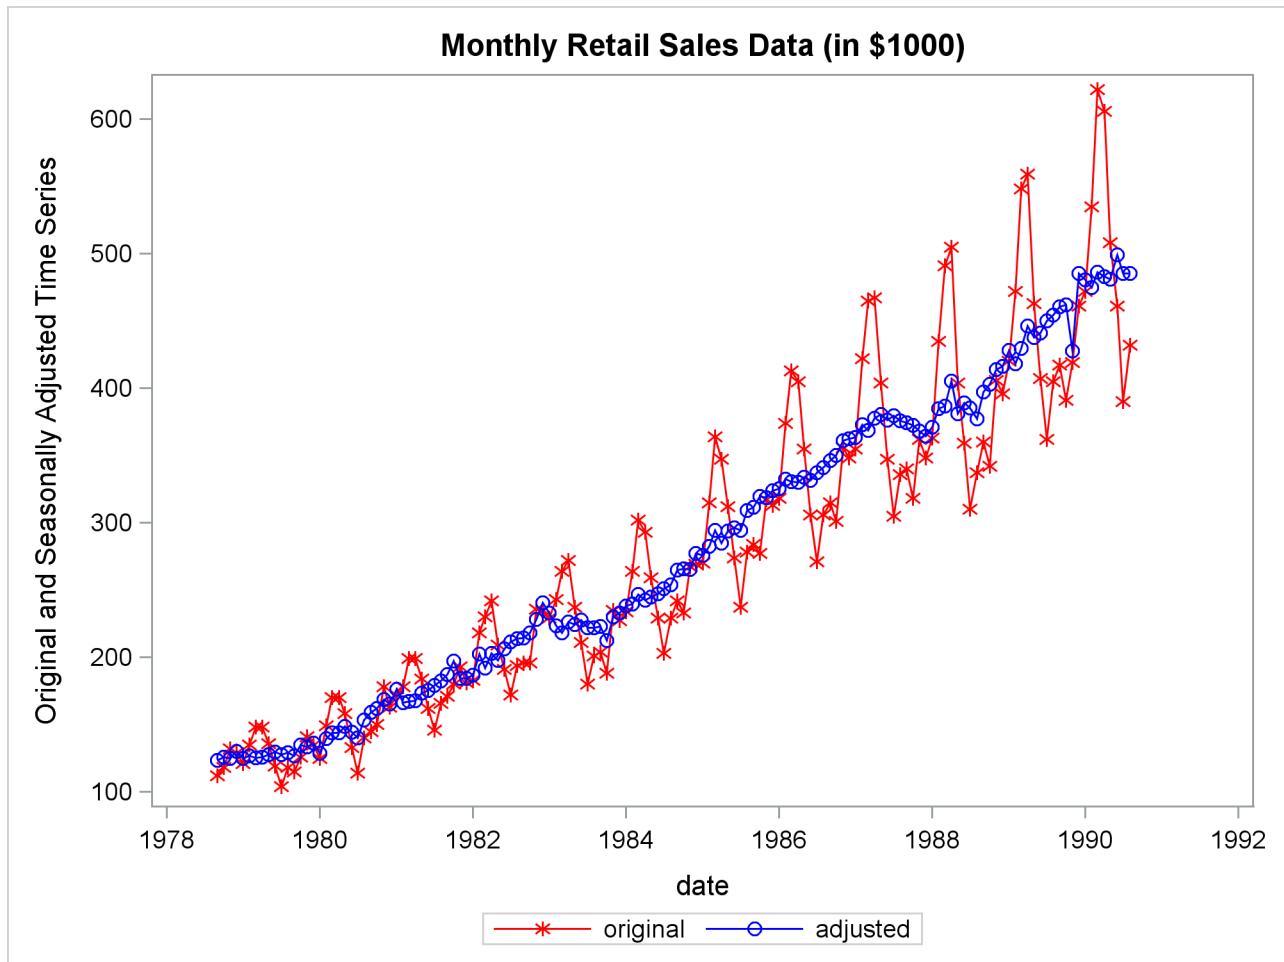
From [Output 36.1.2](#) the seasonal component appears to be slowly increasing, while no apparent pattern exists for the irregular series in [Output 36.1.4](#).

```
data sales;
  input sales @@;
  date = intnx( 'month', '01sep1978'd, _n_-1 );
  format date monyy7.;
datalines;

  ... more lines ...

proc x11 data=sales noprint;
  monthly date=date;
  var sales;
  tables b1 d11;
  output out=out b1=series d10=d10 d11=d11
               d12=d12 d13=d13;
run;

title 'Monthly Retail Sales Data (in $1000)';
proc sgplot data=out;
  series x=date y=series / markers
        markerattrs=(color=red symbol='asterisk')
        lineattrs=(color=red)
        legendlabel="original" ;
  series x=date y=d11 / markers
        markerattrs=(color=blue symbol='circle')
        lineattrs=(color=blue)
        legendlabel="adjusted" ;
  yaxis label='Original and Seasonally Adjusted Time Series';
run;
```

Output 36.1.1 Plots of Original and Seasonally Adjusted Data

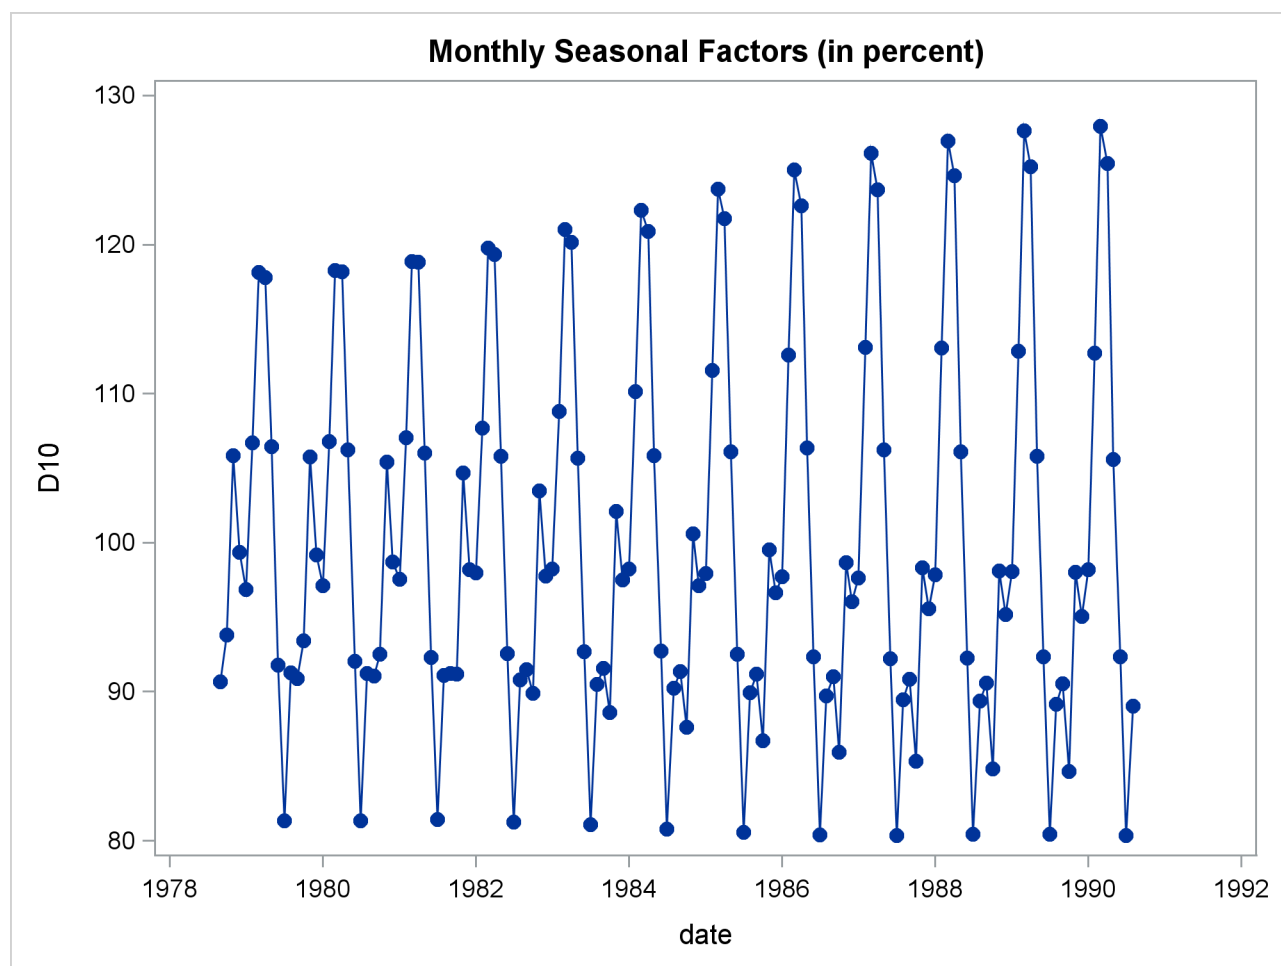
```

title 'Monthly Seasonal Factors (in percent)';
proc sgplot data=out;
  series x=date y=d10 / markers markerattrs=(symbol=CircleFilled) ;
run;

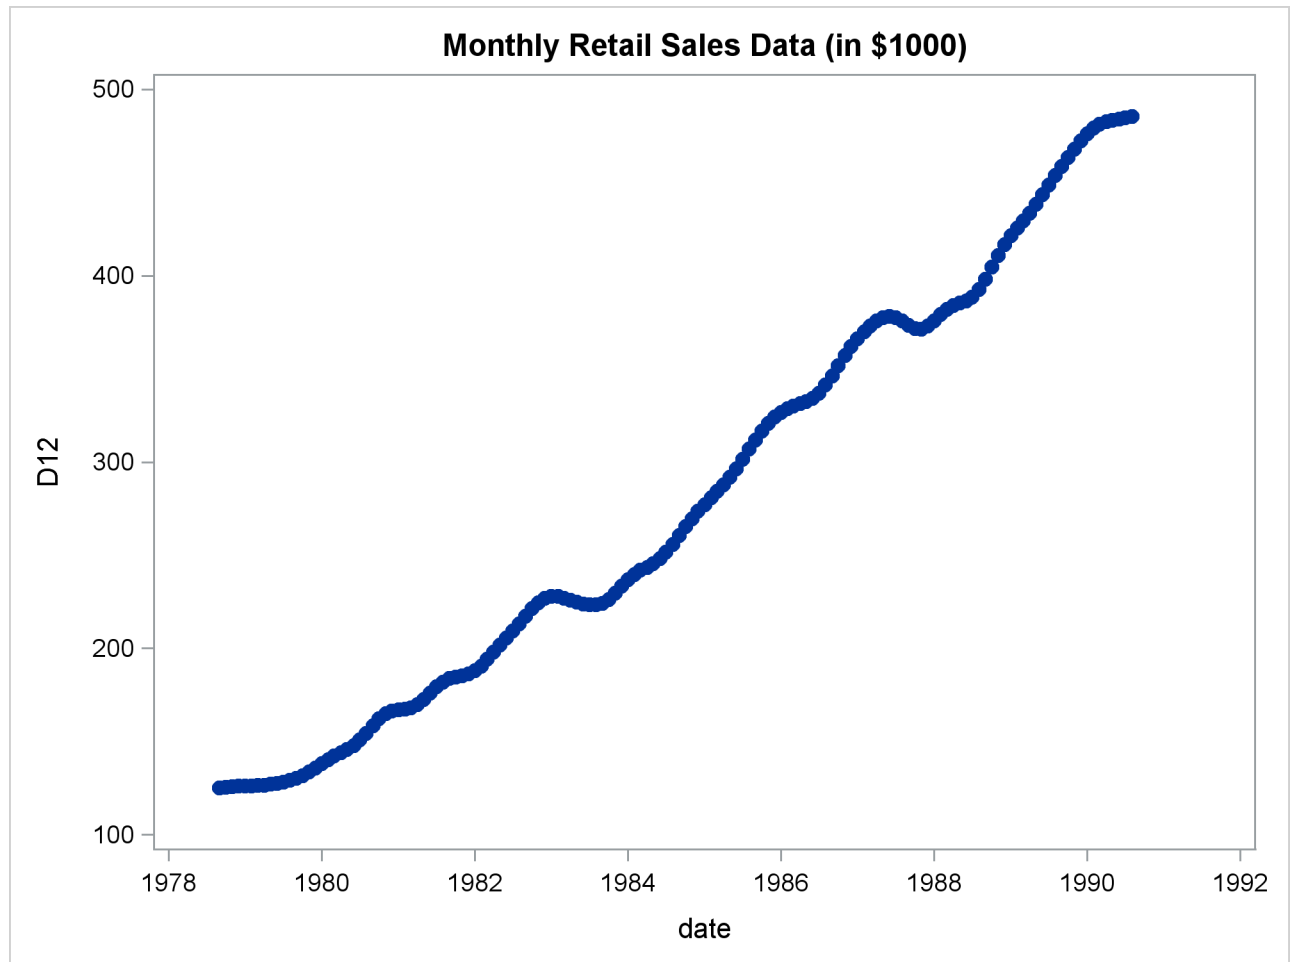
title 'Monthly Retail Sales Data (in $1000)';
proc sgplot data=out;
  series x=date y=d12 / markers markerattrs=(symbol=CircleFilled) ;
run;

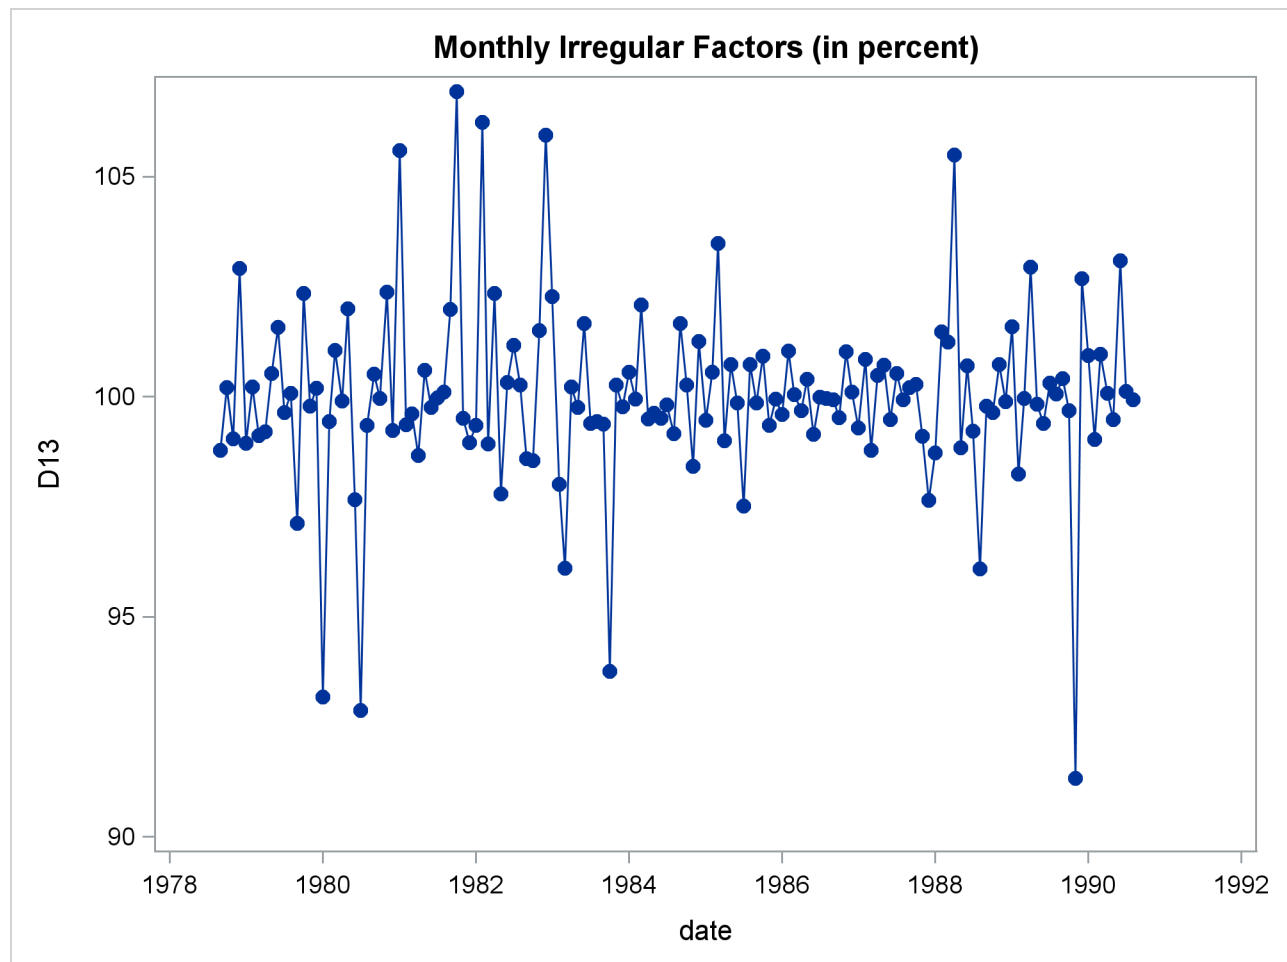
title 'Monthly Irregular Factors (in percent)';
proc sgplot data=out;
  series x=date y=d13 / markers markerattrs=(symbol=CircleFilled) ;
run;

```

Output 36.1.2 Plot of D10, the Final Seasonal Factors

Output 36.1.3 Plot of D12, the Final Trend Cycle



Output 36.1.4 Plot of D13, the Final Irregular Series

Example 36.2: Components Estimation—Quarterly Data

This example is similar to [Example 36.1](#), except quarterly data are used. Tables B1, the original series, and D11, the final seasonally adjusted series, are printed by the TABLES statement. The OUTPUT statement writes the listed tables to an output data set.

```
data quarter;
  input date yyq6. +1 fy35rr 5.2;
  format date yyq6.;
datalines;

... more lines ...
```

```

title 'Monthly Retail Sales Data (in $1000)';
proc x11 data=quarter;
  var fy35rr;
  quarterly date=date;
  tables b1 d11;
  output out=out b1=b1 d10=d10 d11=d11 d12=d12 d13=d13;
run;

```

Output 36.2.1 X11 Procedure Quarterly Example

Monthly Retail Sales Data (in \$1000)

The X11 Procedure

Seasonal Adjustment of - fy35rr

X-11 Seasonal Adjustment Program

U. S. Bureau of the Census

Economic Research and Analysis Division

November 1, 1968

The X-11 program is divided into seven major parts.

Part	Description
A.	Prior adjustments, if any
B.	Preliminary estimates of irregular component weights and regression trading day factors
C.	Final estimates of above
D.	Final estimates of seasonal, trend-cycle and irregular components
E.	Analytical tables
F.	Summary measures
G.	Charts

Series - fy35rr

Period covered - 1st Quarter 1971 to 4th Quarter 1976

Year	B1 Original Series				Total
	1st	2nd	3rd	4th	
1971	6.590	6.010	6.510	6.180	25.290
1972	5.520	5.590	5.840	6.330	23.280
1973	6.520	7.350	9.240	10.080	33.190
1974	9.910	11.150	12.400	11.640	45.100
1975	9.940	8.160	8.220	8.290	34.610
1976	7.540	7.440	7.800	7.280	30.060

Avg	7.670	7.617	8.335	8.300	

Total: 191.53 Mean: 7.9804 S.D.: 1.9424

Output 36.2.2 X11 Procedure Quarterly Example, Table D11

Year	D11 Final Seasonally Adjusted Series				Total
	1st	2nd	3rd	4th	
1971	6.877	6.272	6.222	5.956	25.326
1972	5.762	5.836	5.583	6.089	23.271
1973	6.820	7.669	8.840	9.681	33.009
1974	10.370	11.655	11.855	11.160	45.040
1975	10.418	8.534	7.853	7.947	34.752
1976	7.901	7.793	7.444	6.979	30.116

Avg	8.025	7.960	7.966	7.969	
Total: 191.51 Mean: 7.9797 S.D.: 1.9059					

Example 36.3: Outlier Detection and Removal

PROC X11 can be used to detect and replace outliers in the irregular component of a monthly or quarterly series.

The weighting scheme used in measuring the “extremeness” of the irregulars is developed iteratively; thus the statistical properties of the outlier adjustment method are unknown.

In this example, the data are simulated by generating a trend plus a random error. Two periods in the series were made “extreme” by multiplying one generated value by 2.0 and another by 0.10. The additive model is appropriate based on the way the data were generated. Note that the trend in the generated data was modeled automatically by the trend cycle component estimation.

The detection of outliers is accomplished by considering Table D9, the final replacement values for extreme S-I ratios. This table indicates which observations had irregular component values more than FULLWEIGHT= standard deviation units from 0.0 (1.0 for the multiplicative model). The default value of the FULLWEIGHT= option is 1.5; a larger value would result in fewer observations being declared extreme.

In this example, FULLWEIGHT=3.0 is used to isolate the extreme inflated and deflated values generated in the DATA step. The value of ZEROWEIGHT= must be greater than FULLWEIGHT; it is given a value of 3.5.

A plot of the original and modified series, [Output 36.3.2](#), shows that the deviation from the trend line for the modified series is greatly reduced compared with the original series.


```

data a;
  retain seed 99831;
  do kk = 1 to 48;
    x = kk + 100 + rannor( seed );
    date = intnx( 'month', '01jan1970'd, kk-1 );
    if kk = 20 then x = 2 * x;
    else if kk = 30 then x = x / 10;
    output;
  end;
run;

proc x11 data=a;
  monthly date=date additive
    fullweight=3.0 zeroweight=3.5;
  var x;
  table d9;
  output out=b bl=original el=e1;
run;

proc sgplot data=b;
  series x=date y=original / markers
    markerattrs=(color=red symbol='asterisk')
    lineattrs=(color=red)
    legendlabel="unmodified" ;
  series x=date y=e1 / markers
    markerattrs=(color=blue symbol='circle')
    lineattrs=(color=blue)
    legendlabel="modified" ;
  yaxis label='Original and Outlier Adjusted Time Series';
run;

```

Output 36.3.1 Detection of Extreme Irregulars

Monthly Retail Sales Data (in \$1000)						
The X11 Procedure						
Seasonal Adjustment of - x						
D9 Final Replacement Values for Extreme SI Ratios						
Year	JAN	FEB	MAR	APR	MAY	JUN
1970
1971
1972	-10.671
1973
D9 Final Replacement Values for Extreme SI Ratios						
Year	JUL	AUG	SEP	OCT	NOV	DEC
1970
1971	.	11.180
1972
1973

Output 36.3.2 Plot of Modified and Unmodified Values

References

- Bell, W. R. and Hillmer, S. C. (1984), "Issues Involved with the Seasonal Adjustment of Economic Time Series," *Journal of Business and Economic Statistics*, 2(4).
- Bobbit, L. G. and Otto, M. C. (1990), "Effects of Forecasts on the Revisions of Seasonally Adjusted Data Using the X-11 Adjustment Procedure," *Proceedings of the Business and Economic Statistics Section of the American Statistical Association*, 449–453.
- Buszuwski, J. A. (1987), "Alternative ARIMA Forecasting Horizons When Seasonally Adjusting Producer Price Data with X-11-ARIMA," *Proceedings of the Business and Economic Statistics Section of the American Statistical Association*, 488–493.
- Cleveland, W. P. and Tiao, G. C. (1976), "Decomposition of Seasonal Time Series: A Model for Census X-11 Program," *Journal of the American Statistical Association*, 71(355).

- Cleveland, W. S. and Devlin, S. J. (1980), "Calendar Effects in Monthly Time Series: Detection by Spectrum Analysis and Graphical Methods," *Journal of the American Statistical Association*, 75(No. 371), 487–496.
- Dagum, E. B. (1980), *The X-11-ARIMA Seasonal Adjustment Method*, Statistics Canada.
- Dagum, E. B. (1982a), "The Effects of Asymmetric Filters on Seasonal Factor Revision," *Journal of the American Statistical Association*, 77(380), 732–738.
- Dagum, E. B. (1982b), "Revisions of Seasonally Adjusted Data Due to Filter Changes," *Proceedings of the Business and Economic Section, the American Statistical Association*, 39–45.
- Dagum, E. B. (1982c), "Revisions of Time Varying Seasonal Filters," *Journal of Forecasting*, 1(Issue 2), 173–187.
- Dagum, E. B. (1983), *The X-11-ARIMA Seasonal Adjustment Method*, Technical Report 12-564E, Statistics Canada.
- Dagum, E. B. (1985), "Moving Averages," in S. Kotz and N. L. Johnson, eds., *Encyclopedia of Statistical Sciences*, volume 5, New York: John Wiley & Sons.
- Dagum, E. B. (1988), *The X-11-ARIMA/88 Seasonal Adjustment Method: Foundations and User's Manual*, Ottawa: Statistics Canada.
- Dagum, E. B. and Laniel, N. (1987), "Revisions of Trend Cycle Estimators of Moving Average Seasonal Adjustment Method," *Journal of Business and Economic Statistics*, 5(2), 177–189.
- Davies, N., Triggs, C. M., and Newbold, P. (1977), "Significance Levels of the Box-Pierce Portmanteau Statistic in Finite Samples," *Biometrika*, 64, 517–522.
- Findley, D. F. and Monsell, B. C. (1986), "New Techniques for Determining If a Time Series Can Be Seasonally Adjusted Reliably, and Their Application to U.S. Foreign Trade Series," in M. R. Perryman and J. R. Schmidt, eds., *Regional Econometric Modeling*, 195–228, Amsterdam: Kluwer-Nijhoff.
- Findley, D. F., Monsell, B. C., Shulman, H. B., and Pugh, M. G. (1990), "Sliding Spans Diagnostics for Seasonal and Related Adjustments," *Journal of the American Statistical Association*, 85(410), 345–355.
- Ghysels, E. (1990), "Unit Root Tests and the Statistical Pitfalls of Seasonal Adjustment: The Case of U.S. Post War Real GNP," *Journal of Business and Economic Statistics*, 8(2), 145–152.
- Higginson, J. (1975), *An F test for the Presence of Moving Seasonality When Using Census Method II-X-II Variant*, StatCan Staff Paper STC2102E, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Huot, G., Chui, L., Higginson, J., and Gait, N. (1986), "Analysis of Revisions in the Seasonal Adjustment of Data Using X11ARIMA Model-Based Filters," *International Journal of Forecasting*, 2, 217–229.
- Ladiray, D. and Quenneville, B. (2001), *Seasonal Adjustment with the X-11 Method*, New York: Springer-Verlag.
- Laniel, N. (1985), "Design Criteria for the 13-Term Henderson End-Weights," Working Paper, Methodology Branch, Ottawa: Statistics Canada.
- Lehmann, E. L. (1998), *Nonparametrics: Statistical Methods Based on Ranks*, San Francisco: Holden-Day.

- Ljung, G. M. and Box, G. E. P. (1978), "On a Measure of Lack of Fit in Time Series Models," *Biometrika*, 65(2), 297–303.
- Lothian, J. (1978), *The Identification and Treatment of Moving Seasonality in the X-11 Seasonal Adjustment Method*, StatCan Staff Paper STC0803E, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Lothian, J. (1984a), *The Identification and Treatment of Moving Seasonality in the X-11-ARIMA Seasonal Adjustment Method*, Statcan staff paper, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Lothian, J. (1984b), "The Identification and Treatment of Moving Seasonality in X-11-ARIMA," in *Proceedings of the Business and Economic Statistics Section of the American Statistical Association*, 166–171.
- Lothian, J. and Morry, M. (1978a), *Selection of Models for the Automated X-11-ARIMA Seasonal Adjustment Program*, StatCan Staff Paper STC1789, Seasonal Adjustment & Time Series Analysis Staff, Statistics Canada, Ottawa.
- Lothian, J. and Morry, M. (1978b), *A Test for the Presence of Identifiable Seasonality When Using the X-11-ARIMA Program*, StatCan Staff Paper STC2118, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Marris, S. (1961), "The Treatment of Moving Seasonality in Census Method II," in *Seasonal Adjustment on Electronic Computers*, 257–309, Paris: Organisation for Economic Co-operation and Development.
- Monsell, B. C. (1984), *The Substantive Changes in the X-11 Procedure of X-11-ARIMA*, SRD Research Report Census/SRD/RR-84/10, Bureau of the Census, Statistical Research Division.
- Pierce, D. A. (1980), "Data Revisions with Moving Average Seasonal Adjustment Procedures," *Journal of Econometrics*, 14, 95–114.
- Shiskin, J. (1958), "Decomposition of Economic Time Series," *Science*, 128(3338).
- Shiskin, J. and Eisenpress, H. (1957), "Seasonal Adjustment by Electronic Computer Methods," *Journal of the American Statistical Association*, 52(280).
- Shiskin, J., Young, A. H., and Musgrave, J. C. (1967), *The X-11 Variant of the Census Method II Seasonal Adjustment Program*, Technical Report 15, U.S. Department of Commerce, Bureau of the Census.
- U.S. Bureau of the Census (1969), *X-11 Information for the User*, U.S. Department of Commerce, Washington, DC: Government Printing Office.
- Young, A. H. (1965), *Estimating Trading Day Variation in Monthly Economic Time Series*, Technical Report 12, U.S. Department of Commerce, Bureau of the Census, Washington, DC.

Chapter 37

The X12 Procedure

Contents

Overview: X12 Procedure	2468
Getting Started: X12 Procedure	2469
Basic Seasonal Adjustment	2470
Syntax: X12 Procedure	2473
Functional Summary	2474
PROC X12 Statement	2477
ADJUST Statement	2484
ARIMA Statement	2485
AUTOMDL Statement	2485
BY Statement	2489
CHECK Statement	2489
ESTIMATE Statement	2490
EVENT Statement	2491
FORECAST Statement	2492
ID Statement	2494
IDENTIFY Statement	2494
INPUT Statement	2495
OUTLIER Statement	2496
OUTPUT Statement	2498
REGRESSION Statement	2499
TABLES Statement	2505
TRANSFORM Statement	2505
USERDEFINED Statement	2507
VAR Statement	2507
X11 Statement	2507
Details: X12 Procedure	2512
Missing Values	2512
SAS Predefined Events	2512
Combined Test for the Presence of Identifiable Seasonality	2517
Computations	2519
Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords	2519
Using Auxiliary Variables to Subset Output Data Sets	2522
ODS Graphics	2523
OUT= Data Set	2525

Special Data Sets	2526
Examples: X12 Procedure	2531
Example 37.1: ARIMA Model Identification	2531
Example 37.2: Model Estimation	2535
Example 37.3: Seasonal Adjustment	2537
Example 37.4: RegARIMA Automatic Model Selection	2540
Example 37.5: Automatic Outlier Detection	2546
Example 37.6: User-Defined Regressors	2552
Example 37.7: MDLINFOIN= and MDLINFOOUT= Data Sets	2554
Example 37.8: Setting Regression Parameters	2561
Example 37.9: Illustration of ODS Graphics	2569
Example 37.10: AUXDATA= Data Set	2570
References	2572

Overview: X12 Procedure

The X12 procedure is an adaptation of the U.S. Bureau of the Census X-12-ARIMA Seasonal Adjustment program (U.S. Bureau of the Census 2010). The X-12-ARIMA program was developed by the Time Series Staff of the Statistical Research Division, U.S. Census Bureau. The X-12-ARIMA seasonal adjustment program contains components developed from Statistics Canada's X-11-ARIMA program. The X-12-ARIMA automatic modeling method is based on the work of Gomez and Maravall (1997a, b).

The version of PROC X12 documented here was produced by converting the U.S. Census Bureau's FORTRAN code to the SAS development language and adding typical SAS procedure syntax. This conversion work was performed by SAS and resulted in the X12 procedure. Although several features were added during the conversion, credit for the statistical aspects and general methodology of the X12 procedure belongs to the U.S. Census Bureau.

The X12 procedure seasonally adjusts monthly or quarterly time series. The procedure makes additive or multiplicative adjustments and creates an output data set that contains the adjusted time series and intermediate calculations.

The X-12-ARIMA program combines the capabilities of the X-11 program (Shiskin, Young, and Musgrave 1967) and the X-11-ARIMA/88 program (Dagum 1988) and also introduces some new features (Findley et al. 1998). One of the main enhancements involves the use of a regARIMA model, a regression model with ARIMA (autoregressive integrated moving average) errors. Thus, the X-12-ARIMA program contains methods developed by both the U.S. Census Bureau and Statistics Canada. In addition, the X-12-ARIMA automatic modeling routine is based on the TRAMO (time series regression with ARIMA noise, missing values, and outliers) method (Gomez and Maravall 1997a, b). The four major components of the X-12-ARIMA program are regARIMA modeling, model diagnostics, seasonal adjustment that uses enhanced X-11 methodology, and post-adjustment diagnostics. Statistics Canada's X-11 method fits an ARIMA model to the original series, and then uses the model forecasts to extend the original series. This extended series is then seasonally adjusted by the standard X-11 seasonal adjustment method. The extension of the series improves the estimation of the seasonal factors and reduces revisions to the seasonally adjusted series as new data become available.

Seasonal adjustment of a series is based on the assumption that seasonal fluctuations can be measured in the original series, O_t , $t = 1, \dots, n$, and separated from trend cycle, trading day, and irregular fluctuations. The seasonal component of this time series, S_t , is defined as the intrayear variation that is repeated consistently or in an evolving fashion from year to year. The trend cycle component, C_t , includes variation due to the long-term trend, the business cycle, and other long-term cyclical factors. The trading day component, D_t , is the variation that can be attributed to the composition of the calendar. The irregular component, I_t , is the residual variation. Many economic time series are related in a multiplicative fashion ($O_t = S_t C_t D_t I_t$). Other economic series are related in an additive fashion ($O_t = S_t + C_t + D_t + I_t$). A seasonally adjusted time series, $C_t I_t$ or $C_t + I_t$, consists of only the trend cycle and irregular components. For more details about seasonal adjustment with the X-11 method, see Ladiray and Quenneville (2001).

Graphics are now available with the X12 procedure. For more information, see the section “[ODS Graphics](#)” on page 2523.

Getting Started: X12 Procedure

The most common use of the X12 procedure is to produce a seasonally adjusted series. Eliminating the seasonal component from an economic series facilitates comparison among consecutive months or quarters. A plot of the seasonally adjusted series is often more informative about trends or location in a business cycle than a plot of the unadjusted series.

The following example shows how to use PROC X12 to produce a seasonally adjusted series, $C_t I_t$, from an original series $O_t = S_t C_t D_t I_t$.

In the multiplicative model, the trend cycle component C_t keeps the same scale as the original series O_t , while S_t , D_t , and I_t vary around 1.0. In all displayed tables, these latter components are expressed as percentages and thus vary around 100.0 (in the additive case, they vary around 0.0). However, in the output data set, the data displayed as percentages in the displayed output are expressed as the decimal equivalent and thus vary around 1.0 in the multiplicative case.

The naming convention used in PROC X12 for the tables follows the convention used in the Census Bureau’s X-12-ARIMA program; see *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c), *X-12-ARIMA Quick Reference for Windows (PC)* (U.S. Bureau of the Census 2009b), and *X-12-ARIMA Quick Reference for UNIX/Linux* (U.S. Bureau of the Census 2009a). Also see the section “[Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords](#)” on page 2519. The table names are outlined in [Table 37.12](#).

The tables that correspond to parts A through C are intermediate calculations. The final estimates of the individual components are found in the D tables: Table D10 contains the final seasonal factors, Table D12 contains the final trend cycle, and Table D13 contains the final irregular series. If you are primarily interested in seasonally adjusting a series without consideration of intermediate calculations or diagnostics, you need to look only at Table D11, the final seasonally adjusted series. Tables in part E contain information about extreme values and changes in the original and seasonally adjusted series. The tables in part F are seasonal adjustment quality measures. Spectral analysis is performed in part G. For further information about the tables produced by the X11 statement, see Ladiray and Quenneville (2001).

Basic Seasonal Adjustment

Suppose that you have monthly retail sales data starting in September 1978 in a SAS data set named SALES. At this point, you do not suspect that any calendar effects are present, and there are no prior adjustments that need to be made to the data.

In this simplest case, you need only specify the DATE= variable in the PROC X12 statement and request seasonal adjustment in the X11 statement as shown in the following statements:

```
data sales;
    set sashelp.air;
    sales = air;
    date = intnx( 'month', '01sep78'd, _n_-1 );
    format date monyy.;
run;

proc x12 data=sales date=date;
    var sales;
    x11;
    ods select d11;
run;
```


The results of the seasonal adjustment are in Table D11 (the final seasonally adjusted series) in the displayed output shown in [Figure 37.1](#).

Figure 37.1 Basic Seasonal Adjustment

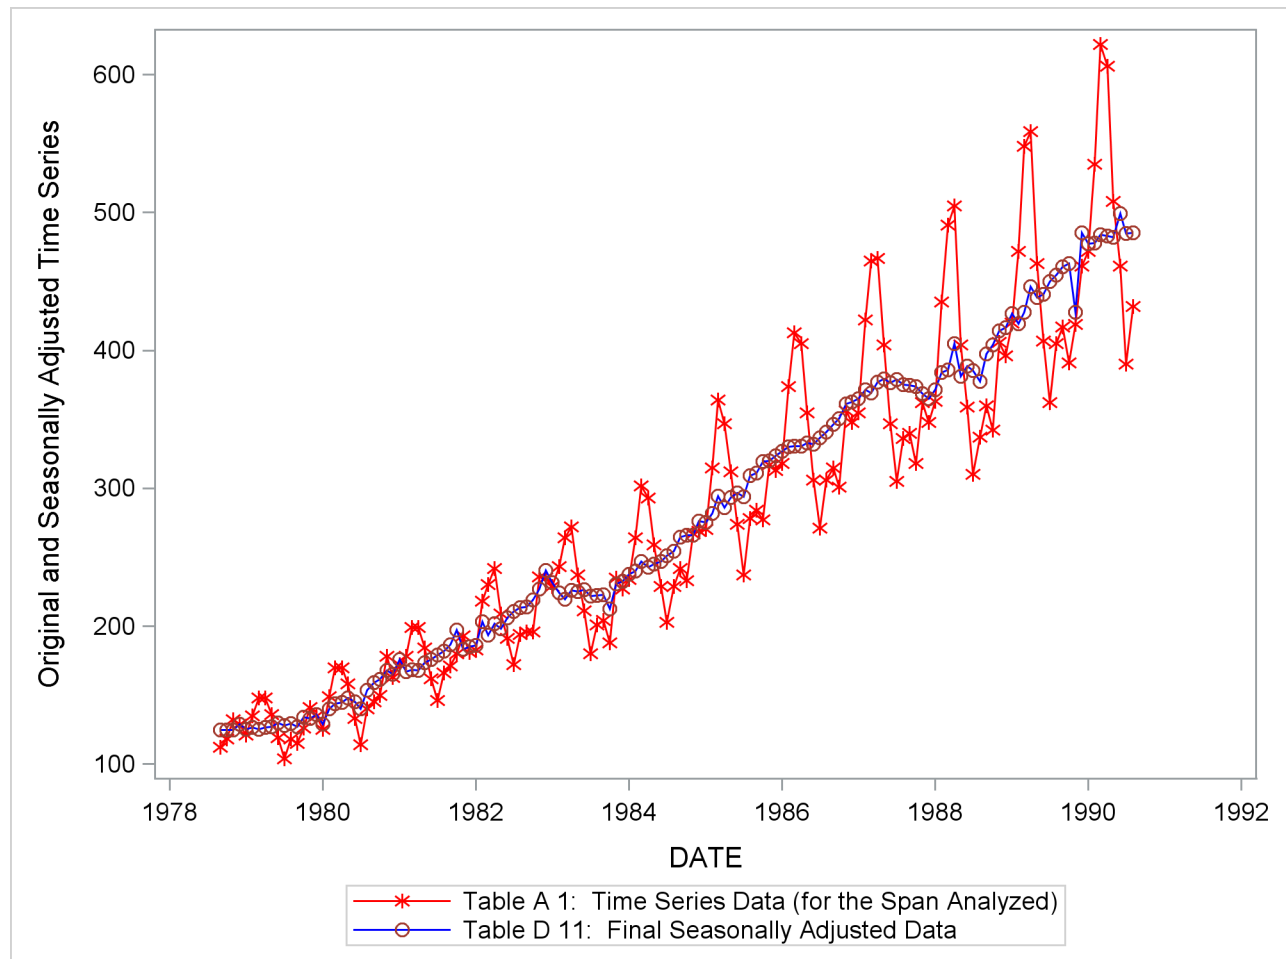
[illegible]

You can compare the original series (Table A1) and the final seasonally adjusted series (Table D11) by plotting them together as shown in [Figure 37.2](#). These tables are requested in the OUTPUT statement and are written to the OUT= data set. Note that the default variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name.

```
proc x12 data=sales date=date noprint;
  var sales;
  x11;
  output out=out a1 d11;
run;

proc sgplot data=out;
  series x=date y=sales_A1 / name = "A1" markers
    markerattrs=(color=red symbol='asterisk')
    lineattrs=(color=red);
  series x=date y=sales_D11 / name= "D11" markers
    markerattrs=(symbol='circle')
    lineattrs=(color=blue);
  yaxis label='Original and Seasonally Adjusted Time Series';
run;
```

Figure 37.2 Plot of Original and Seasonally Adjusted Data



Syntax: X12 Procedure

The X12 procedure uses the following statements:

```
PROC X12 options ;  
  VAR variables ;  
  BY variables ;  
  ID variables ;  
  EVENT variables ;  
  USERDEFINED variables ;  
  TRANSFORM options ;  
  ADJUST options ;  
  IDENTIFY options ;  
  AUTOMDL options ;  
  OUTLIER options ;  
  REGRESSION options ;  
  INPUT variables ;  
  ARIMA options ;  
  ESTIMATE options ;  
  X11 options ;  
  FORECAST options ;  
  CHECK options ;  
  OUTPUT options ;  
  TABLES options ;
```

The PROC X12 statements perform basically the same function as the Census Bureau's X-12-ARIMA specs. *Specs* (specifications) are used in X-12-ARIMA to control the computations and output. The PROC X12 statement performs some of the same functions as the Series spec in the Census Bureau's X-12-ARIMA software. The ADJUST statement performs some of the same functions as the Transform spec. The TRANSFORM, IDENTIFY, AUTOMDL, OUTLIER, REGRESSION, ARIMA, ESTIMATE, X11, FORECAST, and CHECK statements are designed to perform the same functions as the corresponding X-12-ARIMA specs, although full compatibility is not yet available. The Census Bureau documentation *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c) can provide added insight to the functionality of these statements.

Functional Summary

Table 37.1 summarizes the statements and options that control the X12 procedure.

Table 37.1 X12 Syntax Summary

Description	Statement	Option
Data Set Options		
Specifies the auxiliary data set	PROC X12	AUXDATA=
Specifies the input data set	PROC X12	DATA=
Specifies the user-defined event definition data set	PROC X12	INEVENT=
Specifies regression and ARIMA information	PROC X12	MDLINFOIN=
Outputs regression and ARIMA information	PROC X12	MDLINFOOUT=
Writes summary statistics to an output data set	PROC X12	OUTSTAT=
Writes table values to an output data set	OUTPUT	OUT=
Appends forecasts to the OUTPUT OUT= data set	X11 or FORECAST	OUTFORECAST
Prefixes backcasts to the OUTPUT OUT= data set	FORECAST	OUTBACKCAST
Display Control Options		
Suppresses all displayed output	PROC X12	NOPRINT
Specifies the plots to be displayed	PROC X12	PLOTS=
Specifies the type of spectral plot to be displayed	PROC X12	PERIODOGRAM
Specifies the series for spectral analysis	PROC X12	SPECTRUMSERIES=
Displays automatic model information	AUTOMDL	PRINT=
Specifies the number of lags in regARIMA model residuals ACF and PACF tables and plots	CHECK	MAXLAG=
Displays regARIMA model residuals information	CHECK	PRINT=
Displays the iterations history	ESTIMATE	ITPRINT
Displays information about restarted iterations	ESTIMATE	PRINTERR
Specifies the differencing used in the ARIMA model identification ACF and PACF tables and plots	IDENTIFY	DIFF=
Specifies the seasonal differencing used in the ARIMA model identification ACF and PACF tables and plots	IDENTIFY	SDIFF=
Specifies the number of lags in ARIMA model identification ACF and PACF tables and plots	IDENTIFY	MAXLAG=
Displays regression model parameter estimates	IDENTIFY	PRINTREG

Table 37.1 *continued*

Description	Statement	Option
Requests tables that are not displayed by default	TABLES	
Specifies that the summary line not be displayed	TABLES	NOSUM
Date Information Options		
Specifies the date variable	PROC X12	DATE=
Specifies the date of the first observation	PROC X12	START=
Specifies the beginning or ending date or both of the subset	PROC X12	SPAN=
Specifies the interval of the time series	PROC X12	INTERVAL=
Specifies the interval of the time series	PROC X12	SEASONS=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies identifying variables	ID	
Specifies the variables to be seasonally adjusted	VAR	
Specifies the user-defined variables that are available for regression	USERDEFINED	
Controlling the Table Computations		
Suppresses trimming of leading and trailing missing values (if they exist)	PROC X12	NOTRIMMISS
Transforms or prior-adjusts the series	TRANSFORM	FUNCTION=
Transforms or prior-adjusts the series	TRANSFORM	POWER=
Adjusts the series by using a predefined adjustment variable	ADJUST	PREDEFINED=
Specifies the maximum number of iterations for estimating AR and MA parameters	ESTIMATE	MAXITER
Specifies the convergence tolerance for nonlinear estimation	ESTIMATE	TOL=
Specifies the number of backcasts by which to extend the series for seasonal adjustment	FORECAST	NBACKCAST=
Specifies the number of forecasts by which to extend the series for seasonal adjustment	FORECAST	LEAD=
Specifies that one-step-ahead forecasts be computed	FORECAST	OUT1STEP
Specifying Outlier Detection Options		
Specifies automatic outlier detection	OUTLIER	
Specifies the span for outlier detection	OUTLIER	SPAN=
Specifies the outlier types to be detected	OUTLIER	TYPE=

Table 37.1 *continued*

Description	Statement	Option
Specifies the critical values for outlier detection	OUTLIER	CV=
Specifies the critical values for AO outlier detection	OUTLIER	AOCV=
Specifies the critical values for LS outlier detection	OUTLIER	LSCV=
Specifies the critical values for TC outlier detection	OUTLIER	TCCV=
Specifying the Regression Model		
Specifies predefined regression variables	REGRESSION	PREDEFINED=
Specifies user-defined regression variables	REGRESSION	USERVAR=
Specifies user-defined regression variables	INPUT	
Specifies user defined event regression variables	EVENT	
Specifying the ARIMA Model		
Uses the X-12-ARIMA TRAMO-based method to choose a model	AUTOMDL	
Specifies the ARIMA part of the model	ARIMA	MODEL=
Specifying Automatic Model Detection Options		
Specifies the maximum orders of ARMA polynomials	AUTOMDL	MAXORDER=
Specifies the maximum orders of differencing	AUTOMDL	MAXDIFF=
Specifies the fixed orders of differencing	AUTOMDL	DIFFORDER=
Suppresses fitting of a constant parameter	AUTOMDL	NOINT
Specifies the preference for balanced models	AUTOMDL	BALANCED
Specifies Hannan-Rissanen initial estimation	AUTOMDL	HRINITIAL
Specifies default model acceptance based on Ljung-Box Q	AUTOMDL	ACCEPTDEFAULT
Specifies the acceptance value for Ljung-Box Q	AUTOMDL	LJUNGBOXLIMIT=
Specifies the percentage by which to reduce the outlier critical value	AUTOMDL	REDUCECV=
Specifies the critical value for ARMA coefficients	AUTOMDL	ARMACV=
Model Diagnostics		
Examines the regARIMA model residuals	CHECK	
Specifying Seasonal Adjustment Options		
Specifies seasonal adjustment	X11	

Table 37.1 *continued*

Description	Statement	Option
Specifies the mode of seasonal adjustment decomposition	X11	MODE=
Specifies the seasonal filter	X11	SEASONALMA=
Specifies the sigma limits	X11	SIGMALIM=
Specifies the Henderson trend filter	X11	TRENDMA=
Specifies the D11 calculation method	X11	TYPE=
Specifies the adjustment factors to remove from final seasonally adjusted series	X11	FINAL=
Specifies a method for reconciling the seasonally adjusted series to the original series	X11	FORCE=

PROC X12 Statement

PROC X12 options ;

The PROC X12 statement provides information about the time series to be processed by PROC X12. Either the DATE= or the START= option must be specified. If both options are specified, then a syntax error results and the X12 procedure is not executed.

The original series is displayed in Table A1. If there are missing values in the original series and a re-gARIMA model is specified or automatically selected, then Table MV1 is displayed. Table MV1 contains the original series with missing values replaced by the predicted values from the fitted model. If outliers are identified and Table A19 is added in the TABLES statement, then the outlier adjusted series is displayed in Table A19. Table B1 is displayed when the original data are altered (for example, through an ARIMA model estimation, prior adjustment factor, or regression) or the series is extended with forecasts.

Although the X-12-ARIMA method handles missing values, there are some restrictions. In order for PROC X12 to process the series, no month or quarter can contain missing values for all years. For instance, if the third quarter contained only missing values for all years, then processing is skipped for that series. In addition, if more than half the values for a month or a quarter are missing, then a warning message is displayed in the log file, and other errors might occur later in processing. If a series contains many missing values, other methods of missing value replacement should be considered prior to seasonally adjusting the series.

The following *options* can appear in the PROC X12 statement:

AUXDATA=SAS-data-set

specifies an auxiliary input data set that contains user-defined variables, which are specified in the INPUT statement, the USERVAR= option in the REGRESSION statement, or the USERDEFINED statement. The AUXDATA= data set can also contain the date variable, which is specified in the DATE= option in the PROC X12 statement. If the date variable is present, then the date variable is used to align the observations in the auxiliary data set to the observations in the series that is being

processed. The date values must be sorted in ascending order with no gaps or duplications, and the interval must match the interval of the series. If the date variable is not present or valid, then observations in the auxiliary data set are matched by observation number to the series that is being processed. The auxiliary data set does not support BY-group processing. The variables in the auxiliary data set are applied to all BY groups, where the dates of the BY group correspond to the dates of the auxiliary data set. [Example 37.10](#) shows the use of the `AUXDATA=` data set.

DATA=SAS-data-set

specifies the input SAS data set to use. If this option is omitted, the most recently created SAS data set is used.

DATE=variable

DATEVAR=variable

specifies a variable that gives the date for each observation. Unless specified in the `SPAN=` option, the starting and ending dates are obtained from the first and last values of the BY group for the `DATE=` variable, which must contain SAS date or datetime values. The procedure checks values of the `DATE=` variable to ensure that the input observations are sequenced correctly in ascending order. If the `INTERVAL=` option or the `SEASONS=` option is specified, the values of the date variable must be consistent with the specified seasonality or interval. If neither the `INTERVAL=` option nor the `SEASONS=` option is specified, then the procedure tries to determine the type of data from the values of the date variable. This variable is automatically added to the `OUT=` data set if a data set is requested in an `OUTPUT` statement, and the date values for the variable are extrapolated if necessary. If the `DATE=` option is not specified, the `START=` option must be specified.

INEVENT=SAS-data-set

specifies the input data set that defines any user-defined event variables. This option can be omitted if events are not specified or if only SAS predefined events are specified in an `EVENT` statement. For more information about the format of this data set, see the section “[INEVENT= Data Set](#)” on page 2528.

INTERVAL=interval

specifies the frequency of the input time series. If the input data consist of quarterly observations, then `INTERVAL=QTR` should be used. If the input data consist of monthly observations, then `INTERVAL=MONTH` should be used. If the `INTERVAL=` option is not specified and `SEASONS=4`, then `INTERVAL=QTR` is assumed; likewise, `SEASONS=12` implies `INTERVAL=MONTH`. If both the `INTERVAL=` option and the `SEASONS=` option are specified, the values should not be conflicting. If neither the `INTERVAL=` option nor the `SEASONS=` option is specified and the `START=` option is specified, then the data are assumed to be monthly. If a date variable is specified using the `DATE=` option, it is not necessary to specify the `INTERVAL=` option or the `SEASONS=` option; however, if specified, the values of the `INTERVAL=` option or the `SEASONS=` option should not be in conflict with the values of the date variable. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more details about intervals.

MDLINFOIN=SAS-data-set

specifies an optional input data set that contains model information that can replace the information contained in the `TRANSFORM`, `REGRESSION`, `ARIMA`, and `AUTOMDL` statements. The `MDLINFOIN=` data set can contain BY-group and series names. It is useful for providing specific information about each series to be seasonally adjusted. See the section “[MDLINFOIN= and MDLINFOOUT= Data Sets](#)” on page 2526 for details.

MDLINFOOUT=SAS-data-set

specifies the optional output data set that contains the transformation, regression, and ARIMA information related to each seasonally adjusted series. The data set is sorted by the BY-group variables, if any, and by series names. The MDLINFOOUT= data set can be used as input for the MDLINFOIN= option. See the section “[MDLINFOIN= and MDLINFOOUT= Data Sets](#)” on page 2526 for details.

NOPRINT

suppresses any printed output.

NOTRIMMISS

suppresses the default, by which leading and trailing missing values are trimmed from the series. If NOTRIMMISS is used, PROC X12 automatically generates missing value regressors for any missing value within the span of the series, including leading and trailing missing values.

OUTSTAT=SAS-data-set

specifies an optional output data set which contains the summary statistics that related to each seasonally adjusted series. The data set is sorted by the BY-group variables, if any, and by series names. See the section “[OUTSTAT= Data Set](#)” on page 2530 for details.

PERIODOGRAM

specifies that the PERIODOGRAM rather than the spectrum of the series be plotted in the G tables and plots. If PERIODOGRAM is not specified, then the spectrum is plotted in the G tables.

PLOTS<(global-plot-options)> <= plot-request <(options)>>

PLOTS<(global-plot-options)> <= (plot-request <(options)> <... plot-request <(options)>>>

controls the plots that are produced through ODS Graphics. When you specify only one plot request, you can omit the parentheses around the plot request.

Following are some examples of the PLOTS= option:

```
plots=none
plots=all
plots=residual(none)
plots(only)=(series(acf pacf) residual(hist))
```

ODS Graphics must be enabled before you request plots. For example:

```
ods graphics on;

proc x12 data=sales date=date;
  var sales;
  identify diff=(0,1) sdiff=(0,1);
run;
```

Since no specific plot is requested in this program, the default plots associated with the PROC X12 and IDENTIFY statements are produced.

For general information about ODS Graphics, see Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User's Guide*). If you have enabled ODS Graphics but do not specify any specific plot

request, then the default plots that are associated with each of the PROC X12 statements used in the program are produced. Line printer plots are suppressed when ODS Graphics is enabled.

If NONE is specified in an option, then no plots are produced for that option. If ALL is specified without NONE in an option, then all plots are produced for that option.

Global Plot Options:

The *global-plot-options* apply to all relevant plots that are generated by the X12 procedure. The following *global-plot-option* is supported:

ONLY

suppresses the default plots. Only the plots specifically requested are produced.

Specific Plot Options:

The following list describes the specific plots and their *options*:

ALL

produces all plots that are appropriate for the particular analysis.

NONE

suppresses all plots.

ADJUSTED(< *sa-plot-options* >)

SA(< *sa-plot-options* >)

produces plots of the seasonally adjusted series that results from the decomposition specified in the [X11](#) statement. The SPECTRUM plot is produced by default.

The following *sa-plot-options* are available:

ALL

produces all seasonally adjusted plots.

NONE

suppresses all seasonally adjusted plots.

SPECTRUM

produces the spectral plot of Table G1. Table G1 is calculated based on the modified seasonally adjusted series (Table E2). The data is first-differenced and transformed as specified in the [TRANSFORM](#) statement. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the [PERIODOGRAM](#) option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

FORECAST(< *forecast-plot-options* >)

produces the regARIMA model forecast plots if the [FORECAST](#) statement is specified. The FORECAST plot is produced by default. The following *forecast-plot-options* are available:

ALL

produces all the forecast plots that are appropriate for the particular analysis.

FORECAST

plots the actual time series and its one-step-ahead forecast over the historical period, and plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

FORECASTONLY

plots the forecast and its confidence bands over the forecast horizon only.

MODELFORECASTS

plots the one-step-ahead model forecast and its confidence bands in the historical period; plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

MODELS

plots the one-step-ahead model forecast and its confidence bands in the historical period. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

NONE

suppresses all the forecast plots.

TRANSFORECAST

plots the transformed time series and its one-step-ahead forecast over the historical period; plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSFORECAST plot is available only if the data have been transformed using the **TRANSFORM** statement.

TRANSFORECASTONLY

plots the forecast of the transformed series and its confidence bands over the forecast horizon only. The TRANSFORECASTONLY plot is available only if the data have been transformed using the **TRANSFORM** statement.

TRANSMODELFORECASTS

plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period; plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSMODELFORECASTS plot is available only if the data have been transformed using the **TRANSFORM** statement.

TRANSMODELS

plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSMODELS plot is available only if the data have been transformed using the **TRANSFORM** statement.

IRREGULAR(< ic-plot-options >)**IC(< ic-plot-options >)**

produces plots of the irregular series that results from the decomposition specified in the [X11](#) statement. The SPECTRUM plot is produced by default.

The following *ic-plot-options* are available:

ALL

produces all irregular plots.

NONE

suppresses all irregular plots.

SPECTRUM

produces the spectral plot of Table G2. Table G2 is calculated based on the modified irregular series (Table E3). The data is first-differenced and transformed as specified in the [TRANSFORM](#) statement. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the [PERIODOGRAM](#) option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

RESIDUAL(< residual-plot-options >)

produces the regARIMA model residual series plots if the [CHECK](#) statement is specified. The ACF, PACF, HIST, SQACF, and SPECTRUM plots are produced by default. The following *residual-plot-options* are available:

ACF

produces the plot of residual autocorrelations.

ALL

produces all the residual diagnostics plots that are appropriate for the particular analysis.

HIST

produces the histogram of the residuals and also the residual outliers and residual statistics tables that describe the residual histogram.

NONE

suppresses all the residual diagnostics plots.

PACF

produces the plot of residual partial-autocorrelations if PRINT=PACF is specified in the CHECK statement.

SPECTRUM

produces the spectral plot of Table GRs. Table GRs is calculated based on the regARIMA model residual series. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the [PERIODOGRAM](#) option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

SQACF

produces the plot of squared residual autocorrelations.

SERIES(*< series-plot-options >*)

produces plots that are associated with the identification stage of the modeling. The ACF, PACF, and SPECTRUM plots are produced by default. The following *series-plot-options* are available:

ACF

produces the plot of autocorrelations.

ALL

produces all the plots that are associated with the identification stage.

NONE

suppresses all plots that are associated with the identification stage.

PACF

produces the plot of partial-autocorrelations.

SPECTRUM

produces the spectral plot of Table G0. Table G0 is calculated based on either Table A1, A19, B1 or E1, as specified by the **SPECTRUMSERIES=** option. The original data is first-differenced and transformed as specified in the **TRANSFORM** statement. By default, the type of spectral estimate that is used to calculate the spectral plot is the spectrum. If the **PERIODOGRAM** option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

SEASONS=*number*

specifies the number of observations in a seasonal cycle. If the SEASONS= option is not specified and INTERVAL=QTR, then SEASONS=4 is assumed. If the SEASONS= option is not specified and INTERVAL=MONTH, then SEASONS=12 is assumed. If the SEASONS= option is specified, its value should not conflict with the values of the INTERVAL= option or the values of the date variable. See the preceding descriptions for the START=, DATE=, and INTERVAL= options for more details.

SPAN=(*mmmyy ,mmmyy*)**SPAN=**(*'yyQq' , 'yyQq'*)

specifies the dates of the first and last observations to define a subset for processing. A single date in parentheses is interpreted to be the starting date of the subset. To specify only the ending date, use SPAN=(*,mmmyy*). If the starting or ending date is omitted, then the first or last date, respectively, of the input data set or BY group is assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified; if a two-digit year is specified, the value specified in the YEARCUTOFF= SAS system option applies.

SPECTRUMSERIES=*table-name*

specifies the table name of the series that is used in the spectrum of the original series (Table G0). The table names that can be specified are A1, A19, B1, or E1. The default is B1.

START=*mmmyy***START=***'yyQq'***STARTDATE=***mmmyy***STARTDATE=***'yyQq'*

specifies the date of the first observation. Unless the SPAN= option is used, the starting and ending dates are the dates of the first and last observations, respectively. Either this option or the DATE= option is required. When using this option, use either the INTERVAL= option or the SEASONS= option to specify monthly or quarterly data. If neither the INTERVAL= option nor the SEASONS= option is present, monthly data are assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified; if a two-digit year is specified, the value specified in the YEARCUTOFF= SAS system option applies. When using the START= option with BY processing, the start date is applied to the first observation in each BY group.

ADJUST Statement

ADJUST *option* ;

The ADJUST statement adjusts the series for leap year and length-of-period factors prior to estimating a regARIMA model. The “Prior Adjustment Factors” table is associated with the ADJUST statement.

The following *option* can appear in the ADJUST statement:

PREDEFINED=LOM | LOQ | LPYEAR

specifies length-of-month adjustment, length-of-quarter adjustment, or leap year adjustment. PREDEFINED=LOM and PREDEFINED=LOQ are equivalent because the actual adjustment is determined by the interval of the time series. Also, because leap year adjustment is a limited form of length-of-period adjustment, only one type of predefined adjustment can be specified. The PREDEFINED= option should not be used in conjunction with PREDEFINED=TD or PREDEFINED=TD1COEF in the REGRESSION statement or MODE=ADD or MODE=PSEUDOADD in the X11 statement. PREDEFINED=LPYEAR cannot be specified unless the series is log transformed.

If the series is to be transformed by using a Box-Cox or logistic transformation, the series is first adjusted according to the ADJUST statement, and then it is transformed.

In the case of a length-of-month adjustment for the series with observations Y_t , each observation is first divided by the number of days in that month, m_t , and then multiplied by the average length of month (30.4375), resulting in $(30.4375 \times Y_t)/m_t$. Length-of-quarter adjustments are performed in a similar manner, resulting in $(91.3125 \times Y_t)/q_t$, where q_t is the length in days of quarter t .

Forecasts of the transformed and adjusted data are transformed and adjusted back to the original scale for output.

ARIMA Statement

ARIMA *option* ;

The ARIMA statement specifies the ARIMA part of the regARIMA model. This statement defines a pure ARIMA model if no [REGRESSION statements](#), [INPUT statements](#), or [EVENT statements](#) are specified. The ARIMA part of the model can include multiplicative seasonal factors.

The following *option* can appear in the ARIMA statement:

MODEL=((*p d q*) (*P D Q*)*s*)

specifies the ARIMA model. The format follows standard Box-Jenkins notation (Box, Jenkins, and Reinsel 1994). The nonseasonal AR and MA orders are given by *p* and *q*, respectively, while the seasonal AR and MA orders are given by *P* and *Q*. The number of differences and seasonal differences are given by *d* and *D*, respectively. The notation (*p d q*) and (*P D Q*) can also be specified as (*p, d, q*) and (*P, D, Q*). The maximum lag of any AR or MA parameter is 36. The maximum value of a difference order, *d* or *D*, is 144. All values for *p*, *d*, *q*, *P*, *D*, and *Q* should be nonnegative integers. The seasonality parameter, *s*, should be a positive integer. If *s* is omitted, it is set equal to the value that is specified in the SEASONS= option in the PROC X12 statement.

For example, the following statements specify an ARIMA (2,1,1)(1,1,0)12 model:

```
proc x12 data=ICMETI seasons=12 start=jan1968;
    arima model=((2,1,1) (1,1,0));
```

AUTOMDL Statement

AUTOMDL *options* ;

The AUTOMDL statement invokes the automatic model selection procedure of the X-12-ARIMA method. This method is based largely on the TRAMO (time series regression with ARIMA noise, missing values, and outliers) method by Gomez and Maravall (1997a, b). If the AUTOMDL statement is used without the OUTLIER statement, then only missing values regressors are included in the regARIMA model. If both the AUTOMDL and the OUTLIER statements are used, then both missing values regressors and regressors for automatically identified outliers are included in the regARIMA model. For more information about missing value regressors, see the section “[Missing Values](#)” on page 2512.

If both the AUTOMDL statement and the ARIMA statement are present, the ARIMA statement is ignored. The ARIMA statement specifies the model, but the AUTOMDL statement allows the X12 procedure to select the model. If the AUTOMDL statement is specified and a data set is specified in the MDLINFOIN= option in the PROC X12 statement, then the AUTOMDL statement is ignored if the specified data set contains a model specification for the series. If no model for the series is specified in the MDLINFOIN= data set, the AUTOMDL or ARIMA statement is used to determine the model. Thus, it is possible to give a specific model for some series and automatically identify the model for other series by using both the MDLINFOIN= option and the AUTOMDL statement.

When the AUTOMDL statement is specified, the X12 procedure compares a model selected using a TRAMO method to a default model. The TRAMO method is implemented first, and involves two parts: identifying the orders of differencing and identifying the ARIMA model. The table “ARIMA Estimates for Unit Root Identification” provides details about the identification of the orders of differencing, and the table “Results of Unit Root Test for Identifying Orders of Differencing” shows the orders of differencing selected by TRAMO. The table “Models Estimated by Automatic ARIMA Model Selection Procedure” provides details regarding the TRAMO automatic model selection, and the table “Best Five ARIMA Models Chosen by Automatic Modeling” ranks the best five models estimated using the TRAMO method. The “Comparison of Automatically Selected Model and Default Model” table compares the model selected by the TRAMO method to a default model. At this point in the processing, if the default model is selected over the TRAMO model, then PROC X12 displays a note. No note is displayed if the TRAMO model is selected. PROC X12 then performs checks for unit roots, over-differencing, and insignificant ARMA coefficients. If the model is changed due to any of these tests, a note is displayed. The last table, “Final Automatic Model Selection,” shows the results of the automatic model selection.

The following *options* can appear in the AUTOMDL statement:

ACCEPTDEFAULT

specifies that the default model be chosen if its Ljung-Box Q is acceptable.

ARMACV=value

specifies the threshold value for the t statistics that are associated with the highest-order ARMA coefficients. As a check of model parsimony, the parameter estimates and t statistics of the highest-order ARMA coefficients are examined to determine whether the coefficient is insignificant. An ARMA coefficient is considered to be insignificant if the t value that is displayed in the table “Exact ARMA Maximum Likelihood Estimation” is below the value specified in the ARMACV= option and the absolute value of the parameter estimate is reliably close to zero. The absolute value is considered to be *reliably close to zero* if it is below 0.15 for 150 or fewer observations or is below 0.1 for more than 150 observations. If the highest-order ARMA coefficient is found to be insignificant, then the order of the ARMA model is reduced. For example, if AUTOMDL identifies a (3 1 1)(0 0 1) model and the parameter estimate of the seasonal MA lag of order 1 is -0.09 and its t value is -0.55 , then the ARIMA model is reduced to at least (3 1 1)(0 0 0). After the model is reestimated, the check for insignificant coefficients is performed again. If ARMACV=0.54 is specified in the preceding example, then the coefficient is not found to be insignificant and the model is not reduced.

If a constant is allowed in the model and if the t value associated with the constant parameter estimate is below the ARMACV= critical value, then the constant is considered to be insignificant and is removed from the model. Note that if a constant is added to or removed from the model and then the ARIMA model changes, then the t statistic for the constant parameter estimate also changes. Thus, changing the ARMACV= value does not necessarily add or remove a constant term from the model.

The value specified in the ARMACV= option should be greater than zero. The default value is 1.0.

BALANCED

specifies that the automatic modeling procedure prefer balanced models over unbalanced models. A balanced model is one in which the sum of the AR, seasonal AR, differencing, and seasonal differencing orders equals the sum of the MA and seasonal MA orders. Specifying BALANCED gives the same preference as the TRAMO program. If BALANCED is not specified, all models are given equal consideration.

DIFFORDER=(nonseasonal-order, seasonal-order)

specifies the fixed orders of differencing to be used in the automatic ARIMA model identification procedure. When the DIFFORDER= option is used, only the AR and MA orders are automatically identified. Acceptable values for the regular (nonseasonal) differencing orders are 0, 1, and 2; acceptable values for the seasonal differencing orders are 0 and 1. If the MAXDIFF= option is also specified, then the DIFFORDER= option is ignored. There are no default values for DIFFORDER. If neither the DIFFORDER= option nor the MAXDIFF= option is specified, then the default is MAXDIFF=(2,1).

HRINITIAL

specifies that Hannan-Rissanen estimation be done before exact maximum likelihood estimation to provide initial values. If the HRINITIAL option is specified, then models for which the Hannan-Rissanen estimation has an unacceptable coefficient are rejected.

LJUNGBOXLIMIT=value

specifies acceptance criteria for the confidence coefficient of the Ljung-Box Q statistic. If the Ljung-Box Q for a final model is greater than this value, the model is rejected, the outlier critical value is reduced, and outlier identification is redone with the reduced value. See the [REDUCECV](#) option for more information. The value specified in the LJUNGBOXLIMIT= option must be greater than 0 and less than 1. The default value is 0.95.

MAXDIFF=(nonseasonal-order, seasonal-order)

specifies the maximum orders of regular and seasonal differencing for the automatic identification of differencing orders. When MAXDIFF is specified, the differencing orders are identified first, and then the AR and MA orders are identified. Acceptable values for the regular differencing orders are 1 and 2. The only acceptable value for the seasonal differencing order is 1. If both the MAXDIFF= option and the DIFFORDER option= are specified, then the DIFFORDER= option is ignored. If neither the DIFFORDER= nor the MAXDIFF= option is specified, the default is MAXDIFF=(2,1).

MAXORDER=(nonseasonal-order, seasonal-order)

specifies the maximum orders of nonseasonal and seasonal ARMA polynomials for the automatic ARIMA model identification procedure. The maximum order for the nonseasonal ARMA parameters is 4, and the maximum order for the seasonal ARMA is 2.

NOINT

suppresses the fitting of a constant or intercept parameter in the model.

PRINT=(value-list)

specifies the tables to be displayed in the output. You can specify the following values in *value-list*:

NONE	suppresses all automatic modeling output.
ALL	includes all automatic modeling tables in the output if NONE is not specified.
ONLY	specifies that only the listed tables be output.
AUTOCHOICE	displays the tables titled “Comparison of Automatically Selected Model and Default Model” and “Final Automatic Model Selection.” The “Comparison of Automatically Selected Model and Default Model” table compares a default model to the model chosen by the TRAMO-based automatic modeling method. The “Final Automatic Model Selection” table indicates which model has been chosen automatically. These tables are output by default unless NONE or ONLY is specified in the PRINT= option.
AUTOCHOICEMDL	displays the table “Models Estimated by Automatic ARIMA Model Selection Procedure.” This table summarizes the various models that were considered by the TRAMO automatic model selection method and their measures of fit.
BEST5MODEL	displays the table “Best Five ARIMA Models Chosen by Automatic Modeling.” This table ranks the five best models that were considered by the TRAMO automatic modeling method.
UNITROOTTEST	causes the table titled “Results of Unit Root Test for Identifying Orders of Differencing” to be printed. This table displays the orders that were automatically selected by the AUTOMDL statement. Unless the nonseasonal and seasonal differences are specified using the DIFFORDER= option, the AUTOMDL statement automatically identifies the orders of differencing. These tables are output by default unless NONE or ONLY is specified in the PRINT= option.
UNITROOTTESTMDL	displays the table titled “ARIMA Estimates for Unit Root Identification.” This table summarizes the various models that were considered by the TRAMO automatic selection method while identifying the orders of differencing and the statistics associated with those models. The unit root identification method first attempts to obtain the coefficients by using the Hannan-Rissanen method. If Hannan-Rissanen estimation cannot be performed, the algorithm attempts to obtain the coefficients by using conditional likelihood estimation.

The default output tables are the tables specified by the AUTOCHOICE and UNITROOTTEST options.

REDUCECV=value

specifies the percentage by which the outlier critical value be reduced when a final model is found to have an unacceptable confidence coefficient for the Ljung-Box Q statistic. This value should be between 0 and 1. The default value is 0.14286.

BY Statement

BY *variables* ;

A BY statement can be used with PROC X12 to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the procedure expects the input DATA= data set to be sorted in order of the BY variables.

CHECK Statement

CHECK *options* ;

The CHECK statement produces statistics for diagnostic checking of residuals from the estimated regARIMA model.

The following tables that are associated with diagnostic checking are displayed in the output: “Autocorrelation of regARIMA Model Residuals,” “Partial Autocorrelation of regARIMA Model Residuals,” “Autocorrelation of Squared regARIMA Model Residuals,” “Outliers of the Unstandardized Residuals,” “Summary Statistics for the Unstandardized Residuals,” “Normality Statistics for regARIMA Model Residuals,” and “Table G Rs: 10*LOG(SPECTRUM) of the regARIMA Model Residuals.” If ODS graphics is enabled, the following plots that are associated with diagnostic checking output are produced: the autocorrelation function (ErrorACF) plot of the residuals, the partial autocorrelation function (ErrorPACF) plot of the residuals, the autocorrelation function (SqErrorACF) plot of the squared residuals, a histogram (ResidualHistogram) of the residuals, and a spectral plot (SpectralPlot) of the residuals. See the **PLOTS=RESIDUAL** option in the PROC X12 statement for further information about controlling the display of plots.

The residual histogram displayed by the X12 procedure shows the distribution of the unstandardized, uncentered regARIMA model residuals; the residual histogram displayed by the U.S. Census Bureau’s X-12-ARIMA seasonal adjustment program displays standardized and mean-centered residuals.

The following *options* can appear in the CHECK statement:

MAXLAG=*value*

specifies the number of lags for the residual sample autocorrelation function (ACF) and partial autocorrelation function (PACF). The default is 36 for monthly series and 12 for quarterly series. The minimum value for MAXLAG= is 1.

For the table “Autocorrelation of Squared regARIMA Model Residuals” and the corresponding SqErrorACF plot, the maximum number of lags calculated is 12 for monthly series and 4 for quarterly series. The MAXLAG= option can only reduce the number of lags for this table and plot.

PRINT=ALL | NONE**PRINT=ACF | ACFSQUARED | NORM | PACF****PRINT=RESIDUALOUTLIER | RESIDUALSTATISTICS | SPECRESIDUAL****PRINT=(options)**

specifies the diagnostic checking tables to be displayed. If the PRINT= option is not specified, the default is equivalent to specifying PRINT=(ACF ACFSQUARED NORM RESIDUALOUTLIER RESIDUALSTATISTICS SPECRESIDUAL). If PRINT=NONE is specified and no other PRINT= option is specified, then none of the tables that are associated with diagnostic checking are displayed. However, PRINT=NONE has no effect if other PRINT= options are specified in the CHECK statement. PRINT=ALL specifies that all tables related to diagnostic checking be displayed.

PRINT=ACF displays the table titled “Autocorrelation of regARIMA Model Residuals.”

PRINT=ACFSQUARED displays the table titled “Autocorrelation of Squared regARIMA Model Residuals.”

PRINT=NORM displays the table titled “Normality Statistics for regARIMA Model Residuals”. Measures of normality included in this table are skewness, Geary’s a statistic, and kurtosis.

PRINT=PACF displays the table titled “Partial Autocorrelation of regARIMA Model Residuals.”

PRINT=RESIDUALOUTLIER or PRINT=RESOUTLIER displays the table “Outliers of the Unstandardized Residuals” if the residuals contain outliers.

PRINT=RESIDUALSTATISTICS or PRINT=RESSTAT displays the table titled “Summary Statistics for the Unstandardized Residuals.”

ESTIMATE Statement

ESTIMATE *options* ;

The ESTIMATE statement estimates the regARIMA model. The regARIMA model is specified by the REGRESSION, INPUT, EVENT, and ARIMA statements or by the MDLINFOIN= data set in the PROC X12 statement. Estimation output includes point estimates and standard errors for all estimated AR, MA, and regression parameters; the maximum likelihood estimate of the variance σ^2 ; t statistics for individual regression parameters; χ^2 statistics for assessing the joint significance of the parameters associated with certain regression effects (if included in the model); and likelihood-based model selection statistics (if the exact likelihood function is used). The regression effects for which χ^2 statistics are produced are fixed seasonal effects.

Tables displayed in the output associated with estimation are “Exact ARMA Likelihood Estimation Iteration Tolerances,” “Average Absolute Percentage Error in within-Sample Forecasts,” “ARMA Iteration History,” “AR/MA Roots,” “Exact ARMA Likelihood Estimation Iteration Summary,” “Regression Model Parameter Estimates,” “Chi-Squared Tests for Groups of Regressors,” “Exact ARMA Maximum Likelihood Estimation,” and “Estimation Summary.”

The following *options* can appear in the ESTIMATE statement:

ITPRINT

specifies that the “Iteration History” table be displayed. This table includes detailed output for estimation iterations, including log-likelihood values, parameters, counts of function evaluations, and iterations. It is useful to examine the “Iteration History” table when errors occur within estimation iterations. By default, only successful iterations are displayed, unless the PRINTERR option is specified. An unsuccessful iteration is an iteration that is restarted due to a problem such as a root inside the unit circle. Successful iterations have a status of 0. If restarted iterations are displayed, a note at the end of the table gives definitions for status codes that indicate a restarted iteration. For restarted iterations, the number of function evaluations and the number of iterations is –1, which is displayed as missing. If regression parameters are included in the model, then both IGLS and ARMA iterations are included in the table. The number of function evaluations is a cumulative total.

MAXITER=*value*

specifies the maximum number of iterations used in estimating the AR and MA parameters. For models with regression variables, this limit applies to the total number of ARMA iterations over all iterations of the iterative generalized least squares (IGLS) algorithm. For models without regression variables, this is the maximum number of iterations allowed for the set of ARMA iterations. The default is MAXITER=200.

PRINTERR

causes restarted iterations to be included in the “Iteration History” table if ITPRINT is specified; creates the “Restarted Iterations” table if ITPRINT is not specified. Whether or not PRINTERR is specified, a WARNING message is printed to the log file if any iteration is restarted during estimation.

TOL=*value*

specifies the convergence tolerance for the nonlinear estimation. Absolute changes in the log-likelihood are compared to the TOL= value to check convergence of the estimation iterations. For models with regression variables, the TOL= value is used to check convergence of the IGLS iterations (where the regression parameters are reestimated for each new set of AR and MA parameters). For models without regression variables, there are no IGLS iterations, and the TOL= value is then used to check convergence of the nonlinear iterations that are used to estimate the AR and MA parameters. The default value is TOL=0.00001. The minimum tolerance value is a positive value based on the machine precision and the length of the series. If a tolerance less than the minimum supported value is specified, an error message is displayed and the series is not processed.

EVENT Statement

EVENT *variables* < / *options* > ;

The EVENT statement specifies events to be included in the regression portion of the regARIMA model. Multiple EVENT statements can be specified. If a MDLINFOIN= data set is not specified in the PROC X12 statement, then all variables specified in the EVENT statements are applied to all BY groups and all time series that are processed. If a MDLINFOIN= data set is specified, then the EVENT statements apply only if no regression information for the BY group and series is available in the MDLINFOIN= data set. The

events specified in the EVENT statements either must be SAS predefined events or must be defined in the data set specified in the **INEVENT=SAS-data-set** option in the PROC X12 statement. For a summary of SAS predefined events, see the section “[SAS Predefined Events](#)” on page 2512.

The EVENT statement can also be used to include outlier, level shift, and temporary change regressors that are available as predefined U.S. Census Bureau variables in the X-12-ARIMA program. For example, the following statements specify an additive outlier in January 1970 and a level shift that begins in July 1971:

```
proc x12 data=ICMETI seasons=12 start=jan1968;
  event AO01JAN1970D CBLS01JUL1971D;
```

The following statements specify an additive outlier in the second quarter 1970 and a temporary change that begins in the fourth quarter 1971:

```
proc x12 data=ICMETI seasons=4 start='1970q1';
  event AO01APR1970D TC01OCT1971D;
```

The following *options* can appear in the EVENT statement:

B=(value <F> ...)

specifies initial or fixed values for the EVENT parameters. For details about the B= option, see **B=(value <F> ...)** in the section “[REGRESSION Statement](#)” on page 2499.

USERTYPE=(value)

enables a user-defined variable to be processed in the same manner as a U.S. Census predefined variable. *value* can be AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For details about the USERTYPE= option, see the **USERTYPE=** option in the section “[REGRESSION Statement](#)” on page 2499.

FORECAST Statement

FORECAST *options* ;

The FORECAST statement uses the estimated model to forecast the time series. The output contains point forecasts and forecast statistics for the transformed and original series. Whenever forecasts or backcasts (or both) are generated and seasonal adjustment is performed, the forecasts and backcasts are appended to the original series, and the seasonal adjustment procedures are applied to the forecast or backcast (or both) extended series. If the FORECAST statement is not specified, but a regARIMA model is specified using either the ARIMA or AUTOMDL statement, then the series is extended one year ahead by default.

Tables that contain forecasts, standard errors, and confidence limits are displayed in association with the FORECAST statement. If the data is transformed, then two tables are displayed: one table for the original data, and one table for the transformed data. Data from these tables can be output to a SAS data set using ODS. The auxiliary variable **_SCALE_** is included in forecast data sets that are output using ODS. The value of **_SCALE_** is “Original” or “Transformed” to indicate the scale of the data. The auxiliary variable can

also be used in ODS SELECT and ODS OUTPUT statements. For example, you can specify the following statements to output the forecasts on the original scale to a data set forecasts and the forecasts on the transformed scale to a data set Tforecasts:

```
ods output Original.ForecastCL=forecasts;
ods output Transformed.ForecastCL=Tforecasts;
```

The following *options* can appear in the FORECAST statement:

LEAD=value

specifies the number of periods ahead to forecast for regARIMA extension of the series. The default is the number of periods in a year (4 or 12), and the maximum is 60. Setting LEAD=0 specifies that the series not be extended by forecasts for seasonal adjustment. The LEAD= value also controls the number of forecasts that are displayed in Table D10.A. However, if the series is not extended by forecasts (LEAD=0), then the default year of forecasts is displayed in Table D10.A. Forecast values in Table D10.A are calculated using the method shown on page 148 of Ladiray and Quenneville (2001) based on values that are displayed in Table D10. The regARIMA forecasts affect the D10.A forecasts only indirectly through the impact of the regARIMA forecasts on the seasonal factors that are shown in Table D10.

NBACKCAST=value

BACKCAST=value

NBACK=value

specifies the number of periods to backcast for regARIMA extension of the series. The default is NBACKCAST=0, which specifies that the series not be extended with backcasts. The maximum number of backcasts is 60. The NBACKCAST= value also controls the number of backcasts that are output to the OUT= data set specified in the OUTPUT statement when the OUTBACKCAST option is specified.

OUT1STEP

specifies that the one-step-ahead forecasts be computed and displayed in addition to the multistep forecasts. The default is to compute and display only the multistep forecasts beginning at the forecast horizon.

OUTBACKCAST

OUTBKCAST

determines whether backcasts are included in certain tables sent to the output data set. If OUTBACKCAST is specified, then backcast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include backcasts.

OUTFCST

OUTFORECAST

determines whether forecasts are included in certain tables sent to the output data set. If OUTFORECAST is specified, then forecast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include forecasts. The OUTFORECAST option can be specified in either the [X11](#) statement or the FORECAST statement with identical results.

ID Statement

ID *variables* ;

If you are creating an output data set, use the ID statement to copy values of the ID variables, in addition to the table values, into the output data set. Or, if the VAR statement is omitted, all numeric variables that are not identified as BY variables, ID variables, the DATE= variable, or user-defined regressors are processed as time series. The ID statement has no effect when a VAR statement is specified and an output data set is not created. If the DATE= variable is specified in the PROC X12 statement, this variable is included automatically in the OUTPUT data set. If no DATE= variable is specified, the variable `_DATE_` is added.

The date variable (or `_DATE_`) values outside the range of the actual data (from forecasting) are extrapolated, while all other ID variables are missing in the forecast horizon.

IDENTIFY Statement

IDENTIFY *options* ;

The IDENTIFY statement produces plots of the sample autocorrelation function (ACF) and partial autocorrelation function (PACF) for identifying the ARIMA part of a regARIMA model. The sample ACF and PACF are produced for all combinations of the nonseasonal and seasonal differences of the data specified by the DIFF= and SDIFF= options.

The original series is first transformed as specified in the **TRANSFORM** statement.

If the model includes a regression component (specified using the REGRESSION, INPUT, and EVENT statements or the MDLINFOIN= data set in the PROC X12 statement), both the transformed series and the regressors are differenced at the highest order that is specified in the DIFF= and SDIFF= option. The parameter estimates are calculated using the differenced data. Then the undifferenced regression effects (with the exception of a constant term) are removed from the undifferenced data to produce undifferenced regression residuals. The ACFs and PACFs are calculated for the specified differences of the undifferenced regression residuals.

If the model does not include a regression component, then the ACFs and PACFs are calculated for the specified differences of the transformed data.

Tables displayed in association with identification are “Autocorrelation of Model Residuals” and “Partial Autocorrelation of Model Residuals.” If the model includes a regression component (specified using the REGRESSION, INPUT, and EVENT statements or the MDLINFOIN= data set in the PROC X12 statement), then the “Regression Model Parameter Estimates” table is also displayed if the PRINTREG option is specified.

The following *options* can appear in the IDENTIFY statement:

DIFF=(order, order, order)

specifies orders of nonseasonal differencing to use in model identification. The value 0 specifies no differencing, the value 1 specifies one nonseasonal difference $(1 - B)$, the value 2 specifies two nonseasonal differences $(1 - B)^2$, and so forth. The ACFs and PACFs are produced for all orders of nonseasonal differencing specified, in combination with all orders of seasonal differencing that are specified in the SDIFF= option. The default is DIFF=(0). You can specify up to three values for nonseasonal differences.

MAXLAG=value

specifies the number of lags for the sample autocorrelation function (ACF) and partial autocorrelation function (PACF) of the regression residuals for model identification. The default is 36 for monthly series and 12 for quarterly series. MAXLAG applies to both tables and plots. The minimum value for MAXLAG= is 1.

PRINTREG

causes the “Regression Model Parameter Estimates” table to be printed if the REGRESSION statement is present. By default, this table is not printed.

SDIFF=(order, order, order)

specifies orders of seasonal differencing to use in model identification. The value 0 specifies no seasonal differencing, the value 1 specifies one seasonal difference $(1 - B^s)$, the value 2 specifies two seasonal differences $(1 - B^s)^2$, and so forth. The value for s corresponds to the period specified in the SEASONS= option in the PROC X12 statement. The value of the SEASONS= option is supplied explicitly or is implicitly supplied through the INTERVAL= option or the values of the DATE= variable. The ACFs and PACFs are produced for all orders of seasonal differencing specified, in combination with all orders of nonseasonal differencing specified in the DIFF= option. The default is SDIFF=(0). You can specify up to three values for seasonal differences.

For example, the following statement produces ACFs and PACFs for two levels of differencing: $(1 - B)$ and $(1 - B)(1 - B^s)$:

```
identify diff=(1) sdiff=(0, 1);
```

INPUT Statement

INPUT *variables* < / *options* > ;

The INPUT statement specifies variables in the PROC X12 DATA= or AUXDATA= data set that are to be used as regressors in the regression portion of the regARIMA model. The variables in the data set should contain the values for each observation that define the regressor. Future values of regression variables should also be included in the DATA= data set if the time series listed in the VAR statement is to be extended with regARIMA forecasts. Multiple INPUT statements can be specified. If a MDLINFOIN= data set is not specified in the PROC X12 statement, then all variables listed in the INPUT statements are applied to all BY groups and all time series that are processed. If a MDLINFOIN= data set is specified, then the INPUT statements apply only if no regression information for the BY group and series is available in the MDLINFOIN= data set.

The following *options* can appear in the INPUT statement:

B=(value <F> ...)

specifies initial or fixed values for the INPUT variable parameters. For details about the B= option, see the **B=(value <F> ...)** option in the section “[REGRESSION Statement](#)” on page 2499.

USERTYPE=(value)

enables a user-defined variable to be processed in the same manner as a U.S. Census predefined variable. *value* can be AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For details about the USERTYPE= option, see the **USERTYPE=** option in the section “[REGRESSION Statement](#)” on page 2499.

OUTLIER Statement

OUTLIER *options* ;

The OUTLIER statement specifies that the X12 procedure perform automatic detection of additive point outliers, temporary change outliers, level shifts, or any combination of the three when using the specified model. After outliers are identified, the appropriate regression variables are incorporated into the model as “Automatically Identified Outliers,” and the model is reestimated. This procedure is repeated until no additional outliers are found.

The OUTLIER statement also identifies potential outliers and lists them in the table “Potential Outliers” in the displayed output. Potential outliers are identified by decreasing the critical value by 0.5.

In the output, the default initial critical values used for outlier detection in a given analysis are displayed in the table “Critical Values to Use in Outlier Detection.” Outliers that are detected and incorporated into the model are displayed in the output in the table “Regression Model Parameter Estimates,” where the regression variable is listed as “Automatically Identified.”

The following *options* can appear in the OUTLIER statement:

AOCV=value

specifies a critical value to use for additive point outliers. If AOCV is specified, this value overrides any default critical value for AO outliers. See the [CV= option](#) for more details.

CV=value

specifies an initial critical value to use for detection of all types of outliers. The absolute value of the *t* statistic associated with an outlier parameter estimate is compared with the critical value to determine the significance of the outlier. If the CV= option is not specified, then the default initial critical value is computed using a formula presented by Ljung (1993), which is based on the number of observations or model span used in the analysis. [Table 37.2](#) gives default critical values for various series lengths. Increasing the critical value decreases the sensitivity of the outlier detection routine and can reduce the number of observations treated as outliers. The automatic model identification process might lower the critical value by a certain percentage if the automatic model identification process fails to identify an acceptable model.

Table 37.2 Default Critical Values for Outlier Identification

Number of Observations	Outlier Critical Value
1	1.96
2	2.24
3	2.44
4	2.62
5	2.74
6	2.84
7	2.92
8	2.99
9	3.04
10	3.09
11	3.13
12	3.16
24	3.42
36	3.55
48	3.63
72	3.73
96	3.80
120	3.85
144	3.89
168	3.92
192	3.95
216	3.97
240	3.99
264	4.01
288	4.03
312	4.04
336	4.05
360	4.07

LSCV=*value*

specifies a critical value to use for level shift outliers. If LSCV is specified, this value overrides any default critical value for LS outliers. See the [CV= option](#) for more details.

SPAN=(*mmmyy* ,*mmmyy*)**SPAN=**('yyQq' ,*'yyQq'*)

specifies the dates of the first and last observations to define a subset for searching for outliers. A single date in parentheses is interpreted to be the starting date of the subset. To specify only the ending date, use SPAN=(*mmmyy*) or SPAN=('yyQq'). If the starting or ending date is omitted, then the first or last date, respectively, of the input data set or BY group is assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified. If a two-digit year is specified, the value specified in the YEARCUTOFF= SAS system option applies.

TCCV=value

specifies a critical value to use for temporary change outliers. If TCCV is specified, this value overrides any default critical value for TC outliers. See the [CV= option](#) for more details.

TYPE=NONE**TYPE=(outlier types)**

lists the outlier types to be detected by the automatic outlier identification method. TYPE=NONE turns off outlier detection. The valid outlier types are AO, LS, and TC. The default is TYPE=(AO LS).

OUTPUT Statement

OUTPUT OUT= *SAS-data-set* < **YEARSEAS** > *tablename1 tablename2 ...* ;

The OUTPUT statement creates an output data set that contains specified tables. The data set is named by the OUT= option.

OUT=SAS-data-set

names the data set to contain the specified tables. If the OUT= option is omitted, the data set is named using the default DATA*n* convention.

YEARSEAS**YRSEAS**

specifies that two additional variables be added to the OUT= data set. The two additional variables are the variables `_YEAR_` and `_SEASON_`. The variable `_YEAR_` contains the year of the date identifying the observation. The variable `_SEASON_` contains the month for monthly data, or quarter for quarterly data, of the date that identifies the observation. For monthly data, the value of `_SEASON_` is between 1 and 12. For quarterly data, the value of `_SEASON_` is between 1 and 4. The `_YEAR_` and `_SEASON_` variables are useful when creating seasonal plots.

tablename1 tablename2 ...

For each table to be included in the output data set, you must specify the X12 *tablename* keyword. The keyword corresponds to the title label used by the U.S. Census Bureau X12-ARIMA software. Currently available tables are A1, A2, A6, A7, A8, A8AO, A8LS, A8TC, A9, A10, A19, B1, C17, C20, D1, D7, D8, D9, D10, D10B, D10D, D11, D11A, D11F, D11R, D12, D13, D16, D16B, D18, E1, E2, E3, E5, E6, E6A, E6R, E7, E8, and MV1. If no table is specified in the OUTPUT statement, Table A1 is output to the OUT= data set by default.

The *tablename* keywords that can be used in the OUTPUT statement are listed in the section “[Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords](#)” on page 2519. The following is an example of a VAR statement and an OUTPUT statement:

```
var sales costs;
output out=out_x12 b1 d11;
```

The default variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name. The variable `sales_B1` contains the Table B1 values

for the variable `sales`, the variable `costs_B1` contains the Table B1 values for the variable `costs`, the variable `sales_D11` contains the Table D11 values for the variable `sales`, and the variable `costs_D11` contains the Table D11 values for the variable `costs`. If necessary, the variable name is shortened so that the table name can be added. If the `DATE=` variable is specified in the PROC X12 statement, then that variable is included in the output data set; otherwise, a variable named `_DATE_` is written to the `OUT=` data set as the date identifier.

REGRESSION Statement

REGRESSION PREDEFINED= *variables* < / **B=**(*value* < **F**>) > ;

REGRESSION USERVAR= *variables* < / **B=**(*value* < **F**>) **USERTYPE=***option* > ;

The REGRESSION statement includes regression variables in a regARIMA model or specifies regression variables whose effects are to be removed by the IDENTIFY statement to aid in ARIMA model identification. Predefined regression variables are selected with the PREDEFINED= option. User-defined regression variables are specified with the USERVAR= option. The currently available predefined variables are listed in Table 37.3. Table A6 in the displayed output generated by the X12 procedure provides information related to trading day effects. Table A7 provides information related to holiday effects. Tables A8, A8AO, A8LS, and A8TC provide information related to outlier factors. Ramps and level shifts are combined in the A8LS table. The A8AO, A8LS, and A8TC tables are available only when more than one outlier type is present in the model. Table A9 provides information about user-defined regression effects. Table A10 provides information about the user-defined seasonal component. Missing values in the span of an input series automatically create missing value regressors. See the NOTRIMMISS option in the PROC X12 statement and the section “Missing Values” on page 2512 for further details about missing values. Combining your model with additional predefined regression variables can result in a singularity problem. If a singularity occurs, then you might need to alter either the model or the choices of the predefined regressors in order to successfully perform the regression.

In order to seasonally adjust a series that uses a regARIMA model, the factors derived from regression are used as multiplicative or additive factors based on the mode of seasonal decomposition. Therefore, regressors should be defined that are appropriate to the mode of the seasonal decomposition, so that meaningful combined adjustment factors can be derived and adjustment diagnostics can be generated. For example, if a regARIMA model is applied to a log-transformed series, then the regression factors are expressed as ratios, which match the form of the seasonal factors that are generated by the multiplicative or log-additive adjustment modes. Conversely, if a regARIMA model is fit to the original series, then the regression factors are measured on the same scale as the original series, which matches the scale of the seasonal factors that are generated by the additive adjustment mode. Note that the default transformation (no transformation) and the default seasonal adjustment mode (multiplicative) are in conflict. Thus when you specify the X11 statement and any of the REGRESSION, INPUT, or EVENT statements, you must also specify either a transformation by using the TRANSFORM statement or a different mode by using the MODE= option in the X11 statement in order to seasonally adjust the data that uses the regARIMA model.

According to Ladiray and Quenneville (2001), “X-12-ARIMA is based on the same principle [as the X-11 method] but proposes, in addition, a complete module, called Reg-ARIMA, that allows for the initial series to be corrected for all sorts of undesirable effects. These effects are estimated using regression models with ARIMA errors (Findley et al. [23]).” The REGRESSION, INPUT, and EVENT statements specify these

regression effects. Predefined effects that can be corrected in this manner are listed in the **PREDEFINED=** option. You can create your own definitions to remove other effects by using the **USERVAR=** option and the **EVENT** statement.

Either the **PREDEFINED=** option or the **USERVAR=** option can be specified in a single **REGRESSION** statement, but not both. Multiple **REGRESSION** statements can be used.

The following *options* can appear in the **REGRESSION** statement.

PREDEFINED=CONSTANT

PREDEFINED=EASTER(*value*)

PREDEFINED=LABOR(*value*)

PREDEFINED=LOM

PREDEFINED=LOMSTOCK

PREDEFINED=LOQ

PREDEFINED=LPYEAR

PREDEFINED=SCEASTER(*value*)

PREDEFINED=SEASONAL

PREDEFINED=SINCOS(*value* ...)

PREDEFINED=TD

PREDEFINED=TD1COEF

PREDEFINED=TD1NOLPYEAR

PREDEFINED=TDNOLPYEAR

PREDEFINED=TDSTOCK(*value*)

PREDEFINED=THANK(*value*)

lists the predefined regression variables to be included in the model. Data values for these variables are calculated by the program, mostly as functions of the calendar. [Table 37.3](#) gives definitions for the available predefined variables. The values **LOM** and **LOQ** are equivalent: the actual regression is controlled by the **SEASONS=** option in the **PROC X12** statement. Multiple predefined regression variables can be used. The syntax for using both a length-of-month and a seasonal regression can be in one of the following forms:

```
regression predefined=lom seasonal;
```

```
regression predefined=(lom seasonal);
```

```
regression predefined=lom predefined=seasonal;
```

Certain restrictions apply when you use more than one predefined regression variable. Only one of **TD**, **TDNOLPYEAR**, **TD1COEF**, or **TD1NOLPYEAR** can be specified. **LPYEAR** cannot be used with **TD**, **TD1COEF**, **LOM**, **LOMSTOCK**, or **LOQ**. **LOM** or **LOQ** cannot be used with **TD** or **TD1COEF**.

The following restriction also applies to the **SINCOS** predefined regression variable. If **SINCOS** is specified, then the **INTERVAL=** option or the **SEASONS=** option in the **PROC X12** statement must also be specified because there are restrictions to this regression variable based on the frequency of the data.

The predefined regression variables TDSTOCK, SCEASTER, EASTER, LABOR, THANK, and SINCOS require extra parameters. Only one TDSTOCK regressor can be implemented in the regression model. If multiple TDSTOCK variables are specified, PROC X12 uses the last TDSTOCK variable specified. For SCEASTER, EASTER, LABOR, THANK, and SINCOS, multiple regressors can be implemented in the model by specifying the variables with different parameters. For example, the following statement specifies two EASTER regressors with widths 7 and 14:

```
regression predefined=easter(7) easter(14);
```

For SINCOS, specifying a parameter includes both the sine and the cosine regressor except for the highest order allowed (2 for quarterly data and 6 for monthly data.) The most common use of the SINCOS variable for quarterly data is

```
regression predefined=sincos(1,2);
```

and for monthly data is

```
regression predefined=sincos(1,2,3,4,5,6);
```

These statements include 3 and 11 regressors in the model, respectively.

Table 37.3 Predefined Regression Variables in X-12-ARIMA

Regression Effect	Variable Definitions
Trend constant CONSTANT	$(1 - B)^{-d}(1 - B^s)^{-D}I(t \geq 1),$ where $I(t \geq 1) = \begin{cases} 1 & \text{for } t \geq 1 \\ 0 & \text{for } t < 1 \end{cases}$
Easter holiday EASTER(<i>w</i>)	$E(w, t) = \frac{1}{w} \times n_t$ and n_t is the number of the <i>w</i> days before Easter that fall in month (or quarter) <i>t</i> . (Note: This variable is 0 except in February, March, and April (or first and second quarter). It is nonzero in February only for $w > 22$.) Restriction: $1 \leq w \leq 25$.
Labor Day LABOR(<i>w</i>)	$L(w, t) = \frac{1}{w} \times [\text{no. of the } w \text{ days before Labor Day that fall in month } t]$ (Note: This variable is 0 except in August and September.) Restriction: $1 \leq w \leq 25$.
Length-of-month (monthly flow) LOM	$m_t - \bar{m}$ where m_t = length of month <i>t</i> (in days) and $\bar{m} = 30.4375$ (average length of month)

Table 37.3 continued

Regression Effect	Variable Definitions
Stock length-of-month LOMSTOCK	$SLOM_t = \begin{cases} m_t - \bar{m} - \mu(l) & \text{for } t = 1 \\ SLOM_{t-1} + m_t - \bar{m} & \text{otherwise} \end{cases}$ <p>where \bar{m} and m_t are defined in LOM and</p> $\mu(l) = \begin{cases} 0.375 & \text{when first February in series is a leap year} \\ 0.125 & \text{when second February in series is a leap year} \\ -0.125 & \text{when third February in series is a leap year} \\ -0.375 & \text{when fourth February in series is a leap year} \end{cases}$
Length-of-quarter (quarterly flow) LOQ	$q_t - \bar{q}$ where q_t = length of quarter t (in days) and $\bar{q} = 91.3125$ (average length of quarter)
Leap year (monthly and quarterly flow) LPYEAR	$LY_t = \begin{cases} 0.75 & \text{in leap year February (first quarter)} \\ -0.25 & \text{in other Februaries (first quarter)} \\ 0 & \text{otherwise} \end{cases}$
Statistics Canada Easter (monthly or quarterly flow) SCEASTER(w)	<p>If Easter falls before April w, let n_E be the number of the w days on or before Easter that fall in March. Then:</p> $E(w, t) = \begin{cases} n_E/w & \text{in March} \\ -n_E/w & \text{in April} \\ 0 & \text{otherwise} \end{cases}$ <p>If Easter falls on or after April w, then $E(w, t) = 0$. (Note: This variable is 0 except in March and April (or first and second quarter).) Restriction: $1 \leq w \leq 24$.</p>
Fixed seasonal SEASONAL	$M_{1,t} = \begin{cases} 1 & \text{in January} \\ -1 & \text{in December} \\ 0 & \text{otherwise} \end{cases}$ $, \dots, M_{11,t} = \begin{cases} 1 & \text{in November} \\ -1 & \text{in December} \\ 0 & \text{otherwise} \end{cases}$
Fixed seasonal SINCOS(j) SINCOS(j_1, \dots, j_n)	$\sin(w_j t), \cos(w_j t)$, where $w_j = 2\pi j/s$, $1 \leq j \leq s/2$ and s is the seasonal period (drop $\sin(w_j t) \equiv 0$ for $j = s/2$) Restrictions: $1 \leq j_i \leq s/2$, $1 \leq n \leq s/2$.

Table 37.3 continued

Regression Effect	Variable Definitions
Trading day TD, TDNOLPYEAR	$T_{1,t} = (\text{number of Mondays}) - (\text{number of Sundays})$ $, \dots, T_{6,t} = (\text{number of Saturdays}) - (\text{number of Sundays})$
One coefficient trading day TD1COEF, TD1NOLPYEAR	$(\text{number of weekdays}) - \frac{5}{2}(\text{number of Saturdays and Sundays})$
Stock trading day TDSTOCK(w)	$D_{1,t} = \begin{cases} 1 & \tilde{w}^{th} \text{ day of month } t \text{ is a Monday} \\ -1 & \tilde{w}^{th} \text{ day of month } t \text{ is a Sunday} \\ 0 & \text{otherwise} \end{cases}$ $, \dots, D_{6,t} = \begin{cases} 1 & \tilde{w}^{th} \text{ day of month } t \text{ is a Saturday} \\ -1 & \tilde{w}^{th} \text{ day of month } t \text{ is a Sunday} \\ 0 & \text{otherwise} \end{cases}$ <p>where \tilde{w} is the smaller of w and the length of month t. For end-of-month stock series, set w to 31; that is, specify TDSTOCK(31). Restriction: $1 \leq w \leq 31$.</p>
Thanksgiving THANK(w)	$ThC(w, t) = \text{proportion of days from } w \text{ days before Thanksgiving through December 24 that fall in month } t$ (negative values of w indicate days after Thanksgiving). (Note: This variable is 0 except in November and December.) Restriction: $-8 \leq w \leq 17$.

USERVAR=(variables)

specifies variables in the PROC X12 DATA= or AUXDATA= data set that are to be used as regressors. The variables in the data set should contain the values for each observation that define the regressor. Regression variables should also include future values in the data set for the forecast horizon if the time series is to be extended with regARIMA forecasts. Missing values are not permitted within the data span, including forecasts, of the user-defined regressors. [Example 37.6](#) shows how to create an input data set that contains both the series to be seasonally adjusted and a user-defined input variable. All regression variables in the USERVAR= option apply to all time series to be seasonally adjusted unless the MDLINFOIN= data set specifies different regression information. The PREDEFINED= option and the USERVAR= option cannot be specified in the same REGRESSION statement; however, multiple REGRESSION statements can be specified.

The following *options* can be specified with the PREDEFINED= and USERVAR= options after the slash.

B=(value <F> ...)

specifies initial or fixed values for the regression parameters in the order in which they appear in a PREDEFINED= or USERVAR= option. Each B= list applies to the PREDEFINED= or USERVAR= variable list that immediately precedes the slash.

For example, the following statements set an initial value for the user-defined regressor, x, of 1:

```
regression predefined=LOM ;
regression uservar=x / b=1 2 ;
```

In this example, the B= option applies only to the USERVAR= statement. The value 2 is discarded since there is only one variable in the USERVAR= list.

To assign an initial value of 1 to the LOM regressor and 2 to the x regressor, use the following statements:

```
regression predefined=LOM / b=1;
regression uservar=x / b=2 ;
```

An F immediately following the numerical value indicates that this is not an initial value, but a fixed value. See [Example 37.8](#) for an example that uses fixed parameters. In PROC X12, individual parameters can be fixed while other parameters in the same model are estimated.

USERTYPE=(value)

enables a user-defined variable to be processed in the same manner as a U.S. Census predefined variable. *value* can be AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For example, the U.S. Census Bureau EASTER(*w*) regression effects are included the “RegARIMA Holiday Component” table (A7). Specify USERTYPE=EASTER to include a user-defined variable that is processed exactly as the U.S. Census predefined EASTER(*w*) variable, including inclusion in the A7 table. Each USERTYPE= list applies to the USERVAR= variable list that immediately precedes the slash. USERTYPE= does not apply to U.S. Census predefined variables.

The same rules for assigning B= values to regression variables apply for USERTYPE= options. For example, the following statements specify that the user-defined regressor in the variable MyEaster be processed exactly as the U.S. Census predefined LOM variable:

```
regression uservar=MyLOM;
regression uservar=MyEaster / usertype=LOM EASTER;
```

In this example, the USERTYPE= option applies only to the MyEaster variable in the second REGRESSION statement. The USERTYPE value EASTER is discarded since there is only one variable in the USERVAR= list.

To assign the USERTYPE value LOM to the MyLOM variable and EASTER to the MyEaster variable, use the following statements:

```
regression uservar=MyLOM / usertype=LOM;
regression uservar=MyEaster / usertype=EASTER;
```

TABLES Statement

TABLES *tablename1 tablename2 ... options ;*

The TABLES statement enables you to alter the display of the PROC X12 tables. You can specify the display of tables that are not displayed by default by PROC X12, and the NOSUM option enables you to suppress the printing of the period summary line in the time series tables.

tablename1 tablename2 ...

are keywords that correspond to the title label used by the U.S. Census Bureau X12-ARIMA software. For each table to be included in the displayed output, you must specify the X12 *tablename* keyword. Currently available tables are A19, C20, D1, D7, E1, E2, and E3. Although these tables are not displayed by default, their values are sometimes useful in understanding the X-12-ARIMA method. For further description of the available tables, see the section “[Displayed Output, ODS Table Names, and OUTPUT Table Name Keywords](#)” on page 2519.

NOSUM

NOSUMMARY

NOSUMMARYLINE

applies to the tables available for output in the [OUTPUT Statement](#). By default, these tables include a summary line that gives the average, total, or standard deviation for the historical data by period. The NOSUM option suppresses the display of the summary line in the listing. Also, if the tables are output with ODS, the summary line is not an observation in the data set. Thus, the output to the data set is only the time series, both the historical data and the forecast data, if available.

TRANSFORM Statement

TRANSFORM *options ;*

The TRANSFORM statement transforms or adjusts the series prior to estimating a regARIMA model. With this statement, the series can be Box-Cox (power) transformed. The “Prior Adjustment Factors” table is associated with the TRANSFORM statement.

Only one of the following *options* can appear in the TRANSFORM statement:

POWER=*value*

transforms the input series, Y_t , by using a Box-Cox power transformation,

$$Y_t \rightarrow y_t = \begin{cases} \log(Y_t) & \lambda = 0 \\ \lambda^2 + (Y_t^\lambda - 1)/\lambda & \lambda \neq 0 \end{cases}$$

The power λ must be specified (for example, POWER=0.33). The default is no transformation ($\lambda = 1$); that is, POWER=1. The log transformation (POWER=0), square root transformation (POWER=0.5), and the inverse transformation (POWER=-1) are equivalent to the corresponding FUNCTION= option.

Table 37.4 Power Values Related to the Census Bureau Function Argument

FUNCTION=	Transformation	Range for Y_t	Equivalent Power Argument
NONE	Y_t	All values	POWER=1
LOG	$\log(Y_t)$	$Y_t > 0$ for all t	POWER=0
SQRT	$2(\sqrt{Y_t} - 0.875)$	$Y_t \geq 0$ for all t	POWER=0.5
INVERSE	$2 - \frac{1}{Y_t}$	$Y_t \neq 0$ for all t	POWER=-1
LOGISTIC	$\log(\frac{Y_t}{1-Y_t})$	$0 < Y_t < 1$ for all t	No equivalent

FUNCTION=NONE | LOG | SQRT | INVERSE | LOGISTIC | AUTO

specifies the transformation to be applied to the series prior to estimating a regARIMA model. The transformation used by FUNCTION=NONE, LOG, SQRT, INVERSE, or LOGISTIC is related to the POWER= option as shown in Table 37.4. FUNCTION=AUTO uses selection based on Akaike's information criterion (AIC) to decide between a log transformation and no transformation. The default is FUNCTION=NONE.

However, the FUNCTION= and POWER= options are not completely equivalent. In some cases, using the FUNCTION= option causes the program to automatically select other options. For example, FUNCTION=NONE causes the default mode to be MODE=ADD in the X11 statement. Also, the choice of transformation invoked by the FUNCTION=AUTO option can impact the default mode of the X11 statement.

There are restrictions on the value used in the POWER= and FUNCTION= options when preadjustment factors for seasonal adjustment are generated from a regARIMA model. When seasonal adjustment is requested with the X11 statement, any value of the POWER option can be used for the purpose of forecasting the series with a regARIMA model. However, this is not the case when factors generated from the regression coefficients are used to adjust either the original series or the final seasonally adjusted series. In this case, the only accepted transformations are the log transformation, which can be specified as POWER=0 for multiplicative or log-additive seasonal adjustments, and no transformation, which can be specified as POWER=1 for additive seasonal adjustments. If no seasonal adjustment is performed, any POWER transformation can be used. The preceding restrictions also apply when FUNCTION=NONE and FUNCTION=LOG are specified.

USERDEFINED Statement

USERDEFINED *variables* ;

The USERDEFINED statement is used to identify the variables in the input data set or auxiliary data set that are available for user-defined regression. Only numeric variables can be specified. Specifying variables in the USERDEFINED statement does not include the variables as regressors. If a variable is specified in the INPUT statement or USERVAR= option in the REGRESSION statement, it is not necessary to include that variable in the USERDEFINED statement. However, if a variable is specified in the MDLINFOIN= data set in the PROC X12 statement and is not specified in an INPUT statement or in the USERVAR= option in the REGRESSION statement, then the variable should be specified in the USERDEFINED statement in order to make the variable available for regression.

VAR Statement

VAR *variables* ;

The VAR statement specifies the variables in the input data set that are to be analyzed by the procedure. Only numeric variables can be specified. If the VAR statement is omitted, all numeric variables are analyzed except those that appear in a BY statement, ID statement, INPUT statement, USERDEFINED statement, in the USERVAR= option in the REGRESSION statement, or the variable named in the DATE= option in the PROC X12 statement.

X11 Statement

X11 *options* ;

The X11 statement is an optional statement for invoking seasonal adjustment by an enhanced version of the methodology of the U.S. Census Bureau X-11 and X-11Q programs. You can control the type of seasonal adjustment decomposition calculated with the MODE= option. The output includes the final tables and diagnostics for the X-11 seasonal adjustment method listed in [Table 37.5](#). Tables E1, E2, E3, C20, D1, and D7 are not displayed by default; however, you can display these tables by requesting them in the [TABLES](#) statement.

Table 37.5 Tables Related to X11 Seasonal Adjustment

Table Name	Description
B1	Original series, adjusted for prior effects and forecast extended
C17	Final weights for the irregular component
C20	Final extreme value adjustment factors
D1	Modified original data, D iteration
D7	Preliminary trend cycle, D iteration
D8	Final unmodified SI ratios (differences)
D8A	<i>F</i> tests for stable and moving seasonality, D8
D9	Final replacement values for extreme SI ratios (differences), D iteration
D9A	Moving seasonality ratios for each period
SeasonalFilter	Seasonal filter statistics for Table D10
D10	Final seasonal factors
D10B	Seasonal factors, adjusted for user-defined seasonal
D10D	Final seasonal difference
D11	Final seasonally adjusted series
D11A	Final seasonally adjusted series with forced yearly totals
D11R	Rounded final seasonally adjusted series (with forced yearly totals)
TrendFilter	Trend filter statistics for Table D12
D12	Final trend cycle
D13	Final irregular component
D16	Combined seasonal and trading day factors
D16B	Final adjustment differences
D18	Combined calendar adjustment factors
E1	Original data modified for extremes
E2	Modified seasonally adjusted series
E3	Modified irregular series
E4	Ratio of yearly totals of original and seasonally adjusted series
E5	Percent changes (differences) in original series
E6	Percent changes (differences) in seasonally adjusted series
E6A	Percent changes (differences) in seasonally adjusted series with forced yearly totals (D11.A)
E6R	Percent changes (differences) in rounded seasonally adjusted series (D11.R)
E7	Percent changes (differences) in final trend component series
E8	Percent changes (differences) in original series adjusted for calendar factors (A18)
F2A–F2I	X11 diagnostic summary
F3	Monitoring and quality assessment statistics
F4	Day of the week trading day component factors
G	Spectral plots

For more details about the X-11 seasonal adjustment diagnostics, see Shiskin, Young, and Musgrave (1967), Lothian and Morry (1978a), and Ladiray and Quenneville (2001).

The following *options* can appear in the X11 statement:

FINAL=AO | LS | TC | USER | ALL

FINAL=(options)

lists the types of prior adjustment factors, obtained from the EVENT, REGRESSION, and OUTLIER statements, that are to be removed from the final seasonally adjusted series. Additive outliers are removed by specifying FINAL=AO. Level change and ramp outliers are removed by specifying FINAL=LS. Temporary change outliers are removed by specifying FINAL=TC. User-defined regressors or events (USERTYPE=USER) are removed by specifying FINAL=USER. All the preceding are removed by specifying FINAL=ALL or by specifying all the options in parentheses, FINAL=(AO LS TC USER). If this option is not specified, the final seasonally adjusted series contains these effects.

FORCE=TOTALS | ROUND | BOTH

specifies that the seasonally adjusted series be modified to: (a) force the yearly totals of the seasonally adjusted series and the original series to be the same (FORCE=TOTALS), (b) adjust the seasonally adjusted values for each calendar year so that the sum of the rounded seasonally adjusted series for any year equals the rounded annual total (FORCE=ROUND), or (c) first force the yearly totals, then round the adjusted series (FORCE=BOTH). When FORCE=TOTALS is specified, the differences between the annual totals is distributed over the seasonally adjusted values in a way that approximately preserves the month-to-month (or quarter-to-quarter) movements of the original series. For more details, see Huot (1975) and Cholette (1979). This forcing procedure is not recommended if the seasonal pattern is changing or if trading day adjustment is performed. Forcing the seasonally adjusted totals to be the same as the original series annual totals can degrade the quality of the seasonal adjustment, especially when the seasonal pattern is undergoing change. It is not natural if trading day adjustment is performed because the aggregate trading day effect over a year is variable and moderately different from zero.

MODE=ADD | MULT | LOGADD | PSEUDOADD

determines the mode of the seasonal adjustment decomposition to be performed. The four option choices correspond to additive, multiplicative, log-additive, and pseudo-additive decomposition, respectively. If this option is omitted, the procedure performs multiplicative adjustments. Table 37.6 shows the values of the MODE= option and the corresponding models for the original (O) and the seasonally adjusted (SA) series.

Table 37.6 Modes of Seasonal Adjustment and Their Models

Value of Mode Option	Name	Model for <i>O</i>	Model for <i>SA</i>
MULT	Multiplicative	$O = C \times S \times I$	$SA = C \times I$
ADD	Additive	$O = C + S + I$	$SA = C + I$
PSEUDOADD	Pseudo-additive	$O = C \times [S + I - 1]$	$SA = C \times I$
LOGADD	Log-additive	$Log(O) = C + S + I$	$SA = exp(C + I)$

OUTFORECAST**OUTFCST**

determines whether forecasts are included in certain tables sent to the output data set. If **OUTFORECAST** is specified, then forecast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include forecasts. The **OUTFORECAST** option can be specified in either the **X11** statement or the **FORECAST** statement with identical results.

SEASONALMA=S3X1 | S3X3 | S3X5 | S3X9 | S3X15 | STABLE | X11DEFAULT | MSR

specifies which seasonal moving average (also called seasonal “filter”) is used to estimate the seasonal factors. These seasonal moving averages are $n \times m$ moving averages, meaning that an n -term simple average is taken of a sequence of consecutive m -term simple averages. **X11DEFAULT** is the method used by the U.S. Census Bureau’s X-11-ARIMA program. The default for **PROC X12** is **SEASONALMA=MSR**, which is the methodology of Statistic Canada’s X-11-ARIMA/88 program.

Table 37.7 describes the seasonal filter options available for the entire series:

Table 37.7 X-12-ARIMA Seasonal Filter Options and Descriptions

Filter Name	Description of Filter
S3X1	A 3×1 moving average
S3X3	A 3×3 moving average
S3X5	A 3×5 moving average
S3X9	A 3×9 moving average
S3X15	A 3×15 moving average
STABLE	Stable seasonal filter. A single seasonal factor for each calendar month or quarter is generated by calculating the simple average of all the values for each month or quarter (taken after detrending and outlier adjustment).
X11DEFAULT	A 3×3 moving average is used to calculate the initial seasonal factors in each iteration, and a 3×5 moving average to calculate the final seasonal factors
MSR	Filter chosen automatically by using the moving seasonality ratio of X-11-ARIMA/88 (Dagum 1988)

SIGMALIM=(*lower limit, upper limit*)

SIGMALIM=(*lower limit*)

SIGMALIM=(, *upper limit*)

specifies the lower and upper sigma limits in standard deviation units which are used to identify and down-weight extreme irregular values in the internal seasonal adjustment computations. One or both limits can be specified. The lower limit must be greater than 0 and not greater than the upper limit. If the lower sigma limit is not specified, then it defaults to a value of 1.5. The default upper sigma limit is 2.5. The comma must be used if the upper limit is specified.

Table 37.8 shows the effect of the SIGMALIM= option on the weights that are applied to the internal irregular values.

Table 37.8 Weights for Irregular Values

Weight	Sigma Limit
0	If $\frac{ I_t - \mu }{\sigma_{1,I_t}} \geq \text{upper limit}$
Partial weight	If $\text{lower limit} < \frac{ I_t - \mu }{\sigma_{2,I_t}} < \text{upper limit}$
1	If $\frac{ I_t - \mu }{\sigma_{2,I_t}} \leq \text{lower limit}$

In Table 37.8, μ is the theoretical mean of the irregular component, and σ_{1,I_t} and σ_{2,I_t} are the respective estimates of the standard deviation of the irregular component before and after extreme values are removed. The estimates of the standard deviation σ_{1,I_t} and σ_{2,I_t} vary with respect to t , and they are the same if no extreme values are removed. If they are different ($\sigma_{2,I_t} < \sigma_{1,I_t}$), then the first line in Table 37.8 is reevaluated with σ_{2,I_t} . In the special case where the lower limit equals the upper limit, the weight is 1 for $\frac{|I_t - \mu|}{\sigma_{2,I_t}} \leq \text{lower limit}$, and 0 otherwise. For more information about how extreme irregular values are handled in the X11 computations, see Ladiray and Quenneville 2001, pp. 53–68, 122–125.

TRENDMA=*value*

specifies which Henderson moving average is used to estimate the final trend cycle. Any odd number greater than one and less than or equal to 101 can be specified (for example, TRENDMA=23). If the TRENDMA= option is not specified, the program selects a trend moving average based on statistical characteristics of the data. For monthly series, a 9-, 13-, or 23-term Henderson moving average is selected. For quarterly series, the program chooses either a 5- or a 7-term Henderson moving average.

TYPE=SA | SUMMARY | TREND

specifies the method used to calculate the final seasonally adjusted series (Table D11). The default method is TYPE=SA. This method assumes that the original series has not been seasonally adjusted. For method TYPE=SUMMARY, the trend cycle, irregular, trading day, and holiday factors are calculated, but not removed from the seasonally adjusted series. Thus, for TYPE=SUMMARY, Table D11 is the same as the original series. For TYPE=TREND, trading day, holiday, and prior adjustment factors are removed from the original series to calculate the seasonally adjusted series (Table D11) and also are used in the calculation of the final trend (Table D12).

Details: X12 Procedure

Missing Values

PROC X12 can process a series with missing values.

Types of Missing Values

Missing values in a series are considered to be one of two types:

- One type of missing value is a leading or trailing missing value, which occurs before the first nonmissing value or after the last nonmissing value, respectively, in the span of a series. The span of a series can be determined either explicitly by the SPAN= option or implicitly by the START= or DATE= option in the PROC X12 statement. By default, leading and trailing missing values are ignored. If you specify the NOTRIMMISS option in the PROC X12 statement, PROC X12 processes leading and trailing missing values according to the X-12-ARIMA missing value method.
- The second type of missing value is an embedded missing value. These missing values occur between the first nonmissing value and the last nonmissing value in the span of the series. PROC X12 processes embedded missing values according to the X-12-ARIMA missing value method.

X-12-ARIMA Missing Value Method

When the X-12-ARIMA method encounters a missing value, it inserts an additive outlier for the missing observation into the set of regression variables for the model of the series and then replaces the missing observation with a value large enough to be considered an outlier during model estimation. After the regARIMA model is estimated, the X-12-ARIMA method adjusts the original series by using factors generated from these missing value outlier regressors. The adjusted values are estimates of the missing values, and the adjusted series is displayed in Table MV1.

SAS Predefined Events

SAS predefined events are summarized in this section. For complete details about SAS predefined events, see the section “EVENTKEY Statement” in Chapter 8, “[The HPFEVENTS Procedure](#)” (*SAS High-Performance Forecasting User’s Guide*).

[Table 37.9](#) shows a summary of the SAS predefined event keywords. [Table 37.10](#) lists the holiday date keywords that can be used as SAS predefined events. [Table 37.11](#) lists the seasonal date keywords that can be used as SAS predefined events.

Table 37.9 Definitions for EVENTKEY Predefined Event Keywords

Variable Name or Variable Name Format	Description	Qualifier Options
AO<obs>OBS AO<date>D AO<datetime>DT	Outlier	TYPE=POINT VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0)
LS<obs>OBS LS<date>D LS<datetime>DT	Level shift	TYPE=LS VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
TLS<obs>OBS<n> TLS<date>D<n> TLS<datetime>DT<n>	Temporary level shift	TYPE=LS VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=<n>)
NLS<obs>OBS NLS<date>D NLS<datetime>DT	Negative level shift	TYPE=LS VALUE=-1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
CBLS<obs>OBS CBLS<date>D CBLS<datetime>DT	U.S. Census Bureau level shift	TYPE=LS VALUE=-1 SHIFT=-1 BEFORE=(DURATION=ALL) AFTER=(DURATION=0)
TC<obs>OBS TC<date>D TC<datetime>DT	Temporary change	TYPE=TC VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
<date keyword>	Date pulse	TYPE=POINT VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0) PULSE=DAY
LINEAR QUAD CUBIC	Polynomial trends	TYPE=LIN TYPE=QUAD TYPE=CUBIC VALUE=1 BEFORE=(DURATION=ALL) AFTER=(DURATION=ALL) The default timing value is the 0 observation.

Table 37.9 *continued*

Variable Name or Variable Name Format	Description	Qualifier Options
INVERSE LOG	Trends	TYPE=INV TYPE=LOG VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL) The default timing value is the 0 observation.
<seasonal keywords>	Seasonal	TYPE=POINT PULSE= depends on keyword VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0) Timing values are based on keyword.

Table 37.10 Holiday Date Keywords and Definitions

Date Keyword	Definition
BOXING	December 26th
CANADA	July 1st
CANADAOBSERVED	July 1st, or July 2nd if July 1st is a Sunday
CHRISTMAS	December 25th
COLUMBUS	Second Monday in October
EASTER	Easter Sunday
FATHERS	Third Sunday in June
HALLOWEEN	October 31st
LABOR	First Monday in September
MLK	Third Monday in January
MEMORIAL	Last Monday in May
MOTHERS	Second Sunday in May
NEWYEAR	January 1st
THANKSGIVING	Fourth Thursday in November
THANKSGIVINGCANADA	Second Monday in October
USINDEPENDENCE	July 4th
USPRESIDENTS	Third Monday in February (since 1971)
VALENTINES	February 14th
VETERANS	November 11th
VETERANSUSG	Veterans Day date that is observed by U.S. government for Monday–Friday schedule
VETERANSUSPS	Veterans Day date that is observed by U.S. government for Monday–Saturday schedule (U.S. Post Office)
VICTORIA	Monday on or preceding May 24th

Table 37.11 Seasonal Date Keywords and Definitions

Date Keyword	Definition
SECOND_1, ..., SECOND_60	Specified second
MINUTE_1, ..., MINUTE_60	Beginning of the specified minute
HOUR_1, ..., HOUR_24	Beginning of the specified hour
SUNDAY, ..., SATURDAY	All Sundays, and so on, in the time series
WEEK_1, ..., WEEK_53	First day of the n th week of the year (PULSE=WEEK. n shifts this date for $n \neq 1$)
TENDAY_1, TENDAY_4, ..., TENDAY_34	The 1st of the month
TENDAY_2, TENDAY_5, ..., TENDAY_35	The 11th of the month
TENDAY_3, TENDAY_6, ..., TENDAY_36	The 21st of the month
SEMIMONTH_1, SEMIMONTH_3, ..., SEMIMONTH_23	The 1st of the month
SEMIMONTH_2, SEMIMONTH_4, ..., SEMIMONTH_24	The 16th of the month
JANUARY, ..., DECEMBER	The 1st of the specified month
QTR_1, QTR_2, QTR_3, QTR_4	The first date of the quarter indicated after the underscore (PULSE=QTR. n shifts this date for $n \neq 1$)
SEMIYEAR_1, SEMIYEAR_2	The first date of the semiyear (PULSE=SEMIYEAR. n shifts this date for $n \neq 1$)

Combined Test for the Presence of Identifiable Seasonality

The seasonal component of a time series, S_t , is defined as the intrayear variation that is repeated constantly (stable) or in an evolving fashion from year to year (moving seasonality). If the increase in the seasonal factors from year to year is too large, then the seasonal factors introduce distortion into the model. It is important to determine whether seasonality is identifiable without distorting the series.

For seasonality to be identifiable, the series should be identified as seasonal by using the “Test for the Presence of Seasonality Assuming Stability” and “Nonparametric Test for the Presence of Seasonality Assuming Stability.” Also, since the presence of moving seasonality can cause distortion, it is important to evaluate the moving seasonality in conjunction with the stable seasonality to determine whether the seasonality is identifiable. The results of these tests are displayed in “ F tests for Seasonality” (Table D8.A) in the X12 procedure.

The test for identifiable seasonality is performed by combining the F tests for stable and moving seasonality, along with a Kruskal-Wallis test for stable seasonality. The following description is based on Lothian and Morry (1978b). Other details can be found in Dagum (1988, 1983).

Let F_s and F_m denote the F value for the stable and moving seasonality tests, respectively. The combined test is performed as follows (see also Figure 37.3):

1. If the null hypothesis of no stable seasonality is not rejected at the 0.10% significance level ($P_S \geq 0.001$), then the series is considered to be nonseasonal. PROC X12 returns the conclusion, “Identifiable Seasonality Not Present.”
2. If the null hypothesis in step 1 is rejected, then PROC X12 computes the following quantities:

$$T_1 = \frac{7}{F_m}$$

$$T_2 = \frac{3F_m}{F_s}$$

Let T denote the simple average of T_1 and T_2 :

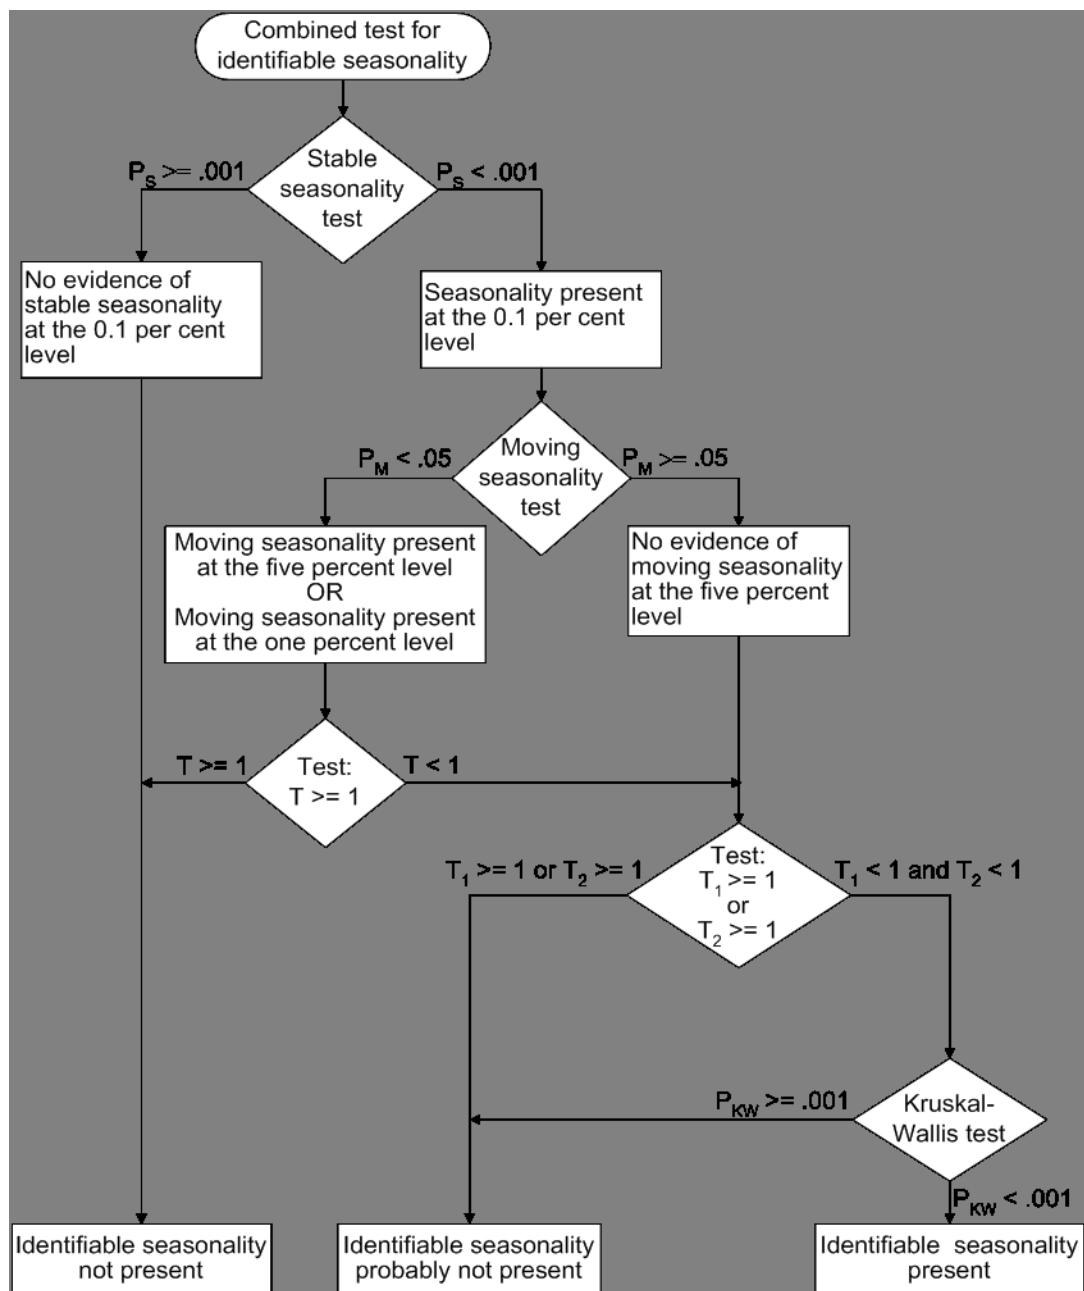
$$T = \frac{(T_1 + T_2)}{2}$$

If the null hypothesis of no moving seasonality is rejected at the 5.0% significance level ($P_M < 0.05$) and if $T \geq 1.0$, the null hypothesis of identifiable seasonality *not* present is not rejected and PROC X12 returns the conclusion, “Identifiable Seasonality Not Present.”

3. If the null hypothesis of identifiable seasonality *not* present has not been accepted, but $T_1 \geq 1.0$, $T_2 \geq 1.0$, or the Kruskal-Wallis chi-squared test fails to reject at the 0.10% significance level ($P_{KW} \geq 0.001$), then PROC X12 returns the conclusion “Identifiable Seasonality Probably Not Present.”
4. If the null hypotheses of no stable seasonality associated with the F_S and Kruskal-Wallis chi-squared tests are rejected and if none of the combined measures described in steps 2 and 3 fail, then the null hypothesis of identifiable seasonality *not* present is rejected and PROC X12 returns the conclusion “Identifiable Seasonality Present.”

Included in the displayed output of Table D8A is the table “Summary of Results and Combined Test for the Presence of Identifiable Seasonality.” This table displays the T_1 , T_2 , and T values and the significance levels for the stable seasonality test, the moving seasonality test, and the Kruskal-Wallis test. The last item in the table is the result of the combined test for identifiable seasonality.

Figure 37.3 Combined Seasonality Test Flowchart



Computations

For more details about the computations used in PROC X12, see the *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c).

For more details about the X-11 method of decomposition, see *Seasonal Adjustment with the X-11 Method* (Ladiray and Quenneville 2001).

Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords

The options specified in PROC X12 control both the tables produced by the procedure and the tables available for output to the OUT= data set specified in the OUTPUT statement.

The displayed output is organized into tables identified by a part letter and a sequence number within the part. The seven major parts of the X12 procedure are as follows:

- A prior adjustments and regARIMA components (optional)
- B preliminary estimates of irregular component weights and trading day regression factors (X-11 method)
- C final estimates of irregular component weights and trading day regression factors
- D final estimates of seasonal, trend cycle, and irregular components
- E analytical tables
- F summary measures
- G charts

Table 37.12 describes the individual tables and charts. “P” indicates that the table is only displayed and is not available for output to the OUT= data set. Data from displayed tables can be extracted into data sets by using the Output Delivery System (ODS). For more information about the SAS Output Delivery System, see the *SAS Output Delivery System: User’s Guide*. For more information about the features of the ODS Graphics system, including the many ways that you can control or customize the plots that are produced by SAS procedures, see Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*).

When tables available through the **OUTPUT statement** are output using ODS, the summary line is included in the ODS output by default. The summary line gives the average, standard deviation, or total by each period. The value –1 for YEAR indicates that the summary line is a total; the value –2 for YEAR indicates that the summary line is an average; and the value –3 for YEAR indicates that the line is a standard deviation. The value of YEAR for historical and forecast values is greater than or equal to zero. Thus, a negative value indicates a summary line. You can suppress the summary line altogether by specifying the **NOSUM** option in the TABLES statement. However, the NOSUM option also suppresses the display of the summary line in the displayed table.

“T” indicates that the table is available using the OUTPUT statement, but is not displayed by default; you must request that these tables be displayed by using the **TABLES Statement**. If there is no notation in the

“Notes” column, then the table is available directly using the OUTPUT statement, without specifying the TABLES statement. If a table is not computed, then it is not displayed; if it is requested in the OUTPUT statement, then the variable in the OUT= data set contains missing values. The actual number of tables displayed depends on the options and statements specified.

Table 37.12 Table Names and Descriptions

Table	Description	Notes
Tables Associated with Model Order Identification		
ModelDescription	Regression model used in ARIMA model identification	P
ACF	Autocorrelation function	P
PACF	Partial autocorrelation function	P
Tables Associated with Automatic Modeling		
UnitRootTestModel	ARIMA estimates for unit root identification	P
UnitRootTest	Results of unit root test for identifying orders of differencing	P
AutoChoiceModel	Models estimated by automatic ARIMA model selection procedure	P
Best5Model	Best five ARIMA models chosen by automatic modeling	P
AutomaticModelChoice	Comparison of automatically selected model and default model	P
FinalModelChoice	Final automatic model choice	P
Diagnostic Tables		
ErrorACF	Autocorrelation of regARIMA model residuals	P
ErrorPACF	Partial autocorrelation of regARIMA model residuals	P
SqErrorACF	Autocorrelation of squared regARIMA model residuals	P
ResidualOutliers	Outliers of the unstandardized residuals	P
ResidualStatistics	Summary statistics for the unstandardized residuals	P
NormalityStatistics	Normality statistics for regARIMA model residuals	P
G	Spectral analysis of regARIMA model residuals	P
Modeling Tables		
MissingExtreme	Extreme or missing values	P
ARMAIterationTolerances	Exact ARMA likelihood estimation iteration tolerances	P
IterHistory	ARMA iteration history	P
OutlierDetection	Critical values to use in outlier detection	P
PotentialOutliers	Potential outliers	P
ARMAIterationSummary	Exact ARMA likelihood estimation iteration summary	P
ModelDescription	Model description for regARIMA model estimation	P
RegParameterEstimates	Regression model parameter estimates	P
RegressorGroupChiSq	Chi-squared tests for groups of regressors	P

Table 37.12 *continued*

Table	Description	Notes
ARMAParameterEstimates	Exact ARMA maximum likelihood estimation	P
AvgFcstErr	Average absolute percentage error in within-sample or without-sample forecasts or backcasts	P
Roots	Seasonal or nonseasonal AR or MA roots	P
MLESummary	Estimation summary	P
ForecastCL	Forecasts, standard errors, and confidence limits	P
MV1	Original series adjusted for missing value regressors	
Sequenced Tables		
A1	Original series	
A2	Prior-adjustment factors	
A6	RegARIMA trading day component	
A7	RegARIMA holiday component	
A8	RegARIMA combined outlier component	
A8AO	RegARIMA AO outlier component	
A8LS	RegARIMA level change outlier component	
A8TC	RegARIMA temporary change outlier component	
A9	RegARIMA user-defined regression component	
A10	RegARIMA user-defined seasonal component	
A19	RegARIMA outlier adjusted original data	T
B1	Prior-adjusted or original series	
C17	Final weight for irregular components	
C20	Final extreme value adjustment factors	T
D1	Modified original data, D iteration	T
D7	Preliminary trend cycle, D iteration	T
D8	Final unmodified S-I ratios	
D8A	Seasonality tests	P
D9	Final replacement values for extreme S-I ratios	
D9A	Moving seasonality ratio	P
SeasonalFilter	Seasonal filter statistics for table D10	P
D10	Final seasonal factors	
D10B	Seasonal factors, adjusted for user-defined seasonal	
D10D	Final seasonal difference	
D11	Final seasonally adjusted series	
D11A	Final seasonally adjusted series with forced yearly totals	
D11F	Factors applied to get adjusted series with forced yearly totals	
D11R	Rounded final seasonally adjusted series (with forced yearly totals)	
TrendFilter	Trend filter statistics for table D12	P
D12	Final trend cycle	
D13	Final irregular series	
D16	Combined adjustment factors	
D16B	Final adjustment differences	

Table 37.12 *continued*

Table	Description	Notes
D18	Combined calendar adjustment factors	
E1	Original data modified for extremes	
E2	Modified seasonally adjusted series	
E3	Modified irregular series	
E4	Ratios of annual totals	P
E5	Percent changes in original series	
E6	Percent changes in final seasonally adjusted series	
E6A	Percent changes (differences) in seasonally adjusted series with forced yearly totals (D11.A)	
E6R	Percent changes (differences) in rounded seasonally adjusted series (D11.R)	
E7	Differences in final trend cycle	
E8	Percent changes (differences) in original series adjusted for calendar factors (A18)	
F2A-I	Summary measures	P
F3	Quality assessment statistics	P
F4	Day of the week trading day component factors	P
G	Spectral analysis	P

Using Auxiliary Variables to Subset Output Data Sets

The X12 procedure can produce more than one table with the same name. For example, the following **IDENTIFY** statement produces ACF and PACF tables for two levels of differencing:

```
identify diff=(1) sdiff=(0, 1);
```

Auxiliary variables in the output data can be used to subset the data. In this example, the auxiliary variables Diff and SDiff specify the levels of regular and seasonal differencing that are used to compute the ACF. The following statements show how to retrieve the ACF results for the first differenced series:

```
ods select acf;
ods output acf=acf;
proc x12 data=sashelp.air date=date;
    identify diff=(1) sdiff=(0,1);
run;
title "Regular Difference=1 Seasonal Difference=0";
data acfd1D0;
    set acf(where=(Diff=1 and Sdiff=0));
run;
```

In addition to any BY variables, the auxiliary variables in the ACF and PACF data sets are `_NAME_`, `_TYPE_`, `Transform`, `Adjust`, `Regressors`, `Diff` and `SDiff`. Auxiliary variables can be related to the group as shown in the Results Viewer (for example, BY variables, `_NAME_`, and `_TYPE_`). However, they can also be variables in the template where printing is suppressed by using `PRINT=OFF`. Auxiliary variables such as `Transform`, `Adjust`, and `Regressors` are not displayed in the ACF and PACF tables because similar information is displayed in the `ModelDescription` table that immediately precedes the ACF and PACF tables. The variables `Diff` and `SDiff` are not displayed because the levels of differencing are included in the title of the ACF and PACF tables.

The BY variables and the `_NAME_` variable are available for all ODS OUTPUT data sets that are produced by the X12 procedure. The `_TYPE_` variable is available for all ODS OUTPUT data sets that are produced during the model identification and model estimation stages. The `_TYPE_` variable enables you to determine whether data in a table, such as the `ModelDescription` table, originated from the model identification stage or the model estimation stage.

The forecast data sets contain the auxiliary variable `_SCALE_`. The value of `_SCALE_` is “Original” or “Transformed” to indicate the scale of the data. The auxiliary variable `_SCALE_` is the same as the group in the Results Viewer. It is not displayed in the forecast tables because the table titles indicate the scale of the data.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “[Statistical Graphics Using ODS](#)” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the `ODS GRAPHICS ON` statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the X12 procedure.

The graphs available through ODS Graphics are ACF plots, PACF plots, a residual histogram, spectral graphs, and forecasting plots. ACF and PACF plots for regARIMA model identification are not available unless the `IDENTIFY` statement is used. ACF plots, PACF plots, the residual histogram, and the residual spectral graph for diagnosis of the regARIMA model residuals are not available unless the `CHECK` statement is used. Forecasting plots are not available unless the `FORECAST` statement is used. A spectral plot of the original series is always available; however, additional spectral plots are provided when the `X11` statement and `CHECK` statement are used. When ODS Graphics is not enabled, the ACF, PACF, and spectral analysis are displayed as columns of a table. The residual histogram is available only when ODS Graphics is enabled. To obtain a table that contains values related to the residual histogram, use the `ODS OUTPUT` statement.

ODS Graph Names

PROC X12 assigns a name to each graph it creates by using ODS. You can use these names to selectively reference the graphs. The names are listed in [Table 37.13](#).

Table 37.13 ODS Graphs Produced by PROC X12

ODS Graph Name	Plot Description	PROC X12 PLOTS= Option
ACFPlot	Autocorrelation of regression residuals	SERIES(ACF)
ErrorACFPlot	Autocorrelation of regARIMA model residuals	RESIDUAL(ACF)
ErrorPACFPlot	Partial autocorrelation of regARIMA model residuals	RESIDUAL(PACF)
ForecastsOnlyPlot	Forecasts only of the original series	FORECAST(FORECASTONLY)
ForecastsOnlyPlot	Forecasts only of the transformed series	FORECAST(TRANSFORECASTONLY)
ForecastsPlot	Forecasts of the original series	FORECAST(FORECAST)
ForecastsPlot	Forecasts of the transformed series	FORECAST(TRANSFORECAST)
ModelForecastsPlot	Model and forecasts of the original series	FORECAST(MODELFORECASTS)
ModelForecastsPlot	Model and forecasts of the transformed series	FORECAST(TRANSMODELFORECASTS)
ModelPlot	Model of the original series	FORECAST(MODELS)
ModelPlot	Model of the transformed series	FORECAST(TRANSMODELS)
PACFPlot	Partial autocorrelation of regression residuals	SERIES(PACF)
ResidualHistogram	Distribution of regARIMA residuals	RESIDUAL(HIST)
SpectralPlot	Spectral plot of the seasonally adjusted series	ADJUSTED(SPECTRUM)
SpectralPlot	Spectral plot of irregular series	IRREGULAR(SPECTRUM)
SpectralPlot	Spectral plot of the regARIMA model residuals	RESIDUAL(SPECTRUM)
SpectralPlot	Spectral plot of the original series	SERIES(SPECTRUM)
SqErrorACFPlot	Autocorrelation of squared regARIMA model residuals	RESIDUAL(SQACF)

OUT= Data Set

You can use the OUTPUT statement to output the component series computed in the X-12-ARIMA decomposition.

The OUT= data set specified in the OUTPUT statement contains the BY variables, if any; the ID variables, if any; and the DATE= variable if the DATE= option is given, or the variable `_DATE_` if the DATE= option is not specified. If user-defined regressor variables or EVENT variables are specified, they are included. In addition, the various components specified by the table names in the OUTPUT statement are included in the OUT= data set.

The OUTPUT OUT= data set can contain the following variables:

BY variables	are the BY variables used to subset the series by BY groups. The BY variables included in this data set match the BY variables, if any, used to process the series in the DATA= data set.
ID variables	enable the series observations to be identified using further information. The ID variables included in this data set match the ID variables, if any, specified in the ID statement and input from the DATA= data set.
DATE variable	is the time ID variable used to process the time series. It is either the variable specified in the DATE= option in the PROC X12 statement or the variable <code>_DATE_</code> generated by the START= option in the PROC X12 statement.
<code>_YEAR_</code> variable	contains a value for the year of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
<code>_SEASON_</code> variable	contains a value for the month or quarter of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
User-defined variables	are variables specified in the INPUT statement or the USERVAR= option in the REGRESSION statement. The values of these variables are copied from the DATA= data set or from the AUXDATA= data set.
EVENT variables	variables specified in the EVENT statement. The values of these variables are computed based on the event definition and the dates of the time series observations.
Table variables	contains the data from the X-12-ARIMA decomposition tables: A1, A2, A6, A7, A8, A8AO, A8LS, A8TC, A9, A10, A19, B1, C17, C20, D1, D7, D8, D9, D10, D10B, D10D, D11, D11A, D11F, D11R, D12, D13, D16, D16B, D18, E1, E2, E3, E5, E6, E6A, E6R, E7, E8, and MV1. The variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name.

Special Data Sets

The X12 procedure can input the MDLINFOIN= and output the MDLINFOOUT= data sets. The structure of both of these data sets is the same. The difference is that when the MDLINFOIN= data set is read, only information relative to specifying a model is processed, whereas the MDLINFOOUT= data set contains the results of estimating a model. The X12 procedure can also read data sets that contain event definition data. The structure of these data sets is the same as in the SAS[®] High Performance Forecasting system.

MDLINFOIN= and MDLINFOOUT= Data Sets

The MDLINFOIN= and MDLINFOOUT= data sets can contain the following variables:

BY variables	enable the model information to be specified by BY groups. BY variables can be included in this data set that match the BY variables used to process the series. If no BY variables are included, then the models specified by <code>_NAME_</code> in the MDLINFOIN= data set apply to all BY groups in the DATA= data set.
<code>_NAME_</code>	should contain the variable name of the time series to which a particular model is to be applied. Omit the <code>_NAME_</code> variable if you are specifying the same model for all series in a BY group.
<code>_MODELTYPE_</code>	specifies whether the observation contains regression or ARIMA information. The value of <code>_MODELTYPE_</code> should be either REG to supply regression information or ARIMA to supply model information. If valid regression information exists in the MDLINFOIN= data set for a BY group and series being processed, then the REGRESSION, INPUT, and EVENT statements are ignored for that BY group and series. Likewise, if valid ARIMA model information exists in the data set, then the AUTOMDL, ARIMA, and TRANSFORM statements are ignored. Valid values for the other variables in the data set depend on the value of the <code>_MODELTYPE_</code> variable. Although other values of <code>_MODELTYPE_</code> might be permitted in other SAS procedures, PROC X12 recognizes only REG and ARIMA.
<code>_MODELPART_</code>	further qualifies the regression information in the observation. For <code>_MODELTYPE_=REG</code> , valid values of <code>_MODELPART_</code> are INPUT, EVENT, and PREDEFINED. A value of INPUT indicates that this observation refers to the user-defined variable whose name is given in <code>_DSVAR_</code> . Likewise, a value of EVENT indicates that the observation refers to the SAS or user-defined event whose name is given in <code>_DSVAR_</code> . PREDEFINED indicates that the name given in <code>_DSVAR_</code> is a predefined U.S. Census Bureau variable. If only ARIMA model information is included in the data set (that is, all observations have <code>_MODELTYPE_=ARIMA</code>), then the <code>_MODELPART_</code> variable can be omitted. For observations where <code>_MODELTYPE_=ARIMA</code> , valid values for <code>_MODELPART_</code> are FORECAST, “.”, or blank.
<code>_COMPONENT_</code>	further qualifies the regression or ARIMA information in the observation. For <code>_MODELTYPE_=REG</code> , the only valid value of <code>_COMPONENT_</code> is SCALE. For <code>_MODELTYPE_=ARIMA</code> , the valid values of <code>_COMPONENT_</code> are TRANSFORM, CONSTANT, NONSEASONAL, and SEASONAL. TRANSFORM indicates that the observation contains the information that would be supplied in the TRANSFORM statement. CONSTANT is specified to control the constant term in the model. NONSEASONAL and SEASONAL refer to the AR, MA, and differencing terms in the ARIMA model.

<code>_PARMTYPE_</code>	further qualifies the regression or ARIMA information in the observation. For <code>_MODELTYPE_=REG</code> , the value of <code>_PARMTYPE_</code> is the same as the value of the <code>USER-TYPE=</code> option in the REGRESSION statement. Since the <code>USER-TYPE=</code> option applies only to user-defined events and variables, the value of <code>_PARMTYPE_</code> does not alter processing in observations where <code>_MODELPART_=PREDEFINED</code> . However, it is consistent to use a value for <code>_PARMTYPE_</code> that matches the U.S. Census Bureau predefined variable. For the constant term in the model information, <code>_PARMTYPE_</code> should be SCALE. For transformation information, the value of <code>_PARMTYPE_</code> should be NONE, LOG, LOGIT, SQRT, or BOXCOX. For <code>_MODELTYPE_=ARIMA</code> , valid values of <code>_PARMTYPE_</code> are AR, MA, and DIF.
<code>_DSVAR_</code>	specifies the variable name associated with the current observation. For <code>_MODELTYPE_=REG</code> , the value of <code>_DSVAR_</code> is the name of the user-defined variable, the event, or the U.S. Census Bureau predefined variable. For <code>_MODELTYPE_=ARIMA</code> , <code>_DSVAR_</code> should match the name of the series being processed. If the ARIMA model information applies to more than one series, then <code>_DSVAR_</code> can be blank or “.”, equivalently.
<code>_VALUE_</code>	contains a numerical value that is used as a parameter for certain types of information. For example, the <code>PREDEFINED=EASTER(6)</code> option in the REGRESSION statement is implemented in the MDLINFOIN= data set by using <code>_DSVAR_=EASTER</code> and <code>_VALUE_=6</code> . For a BOXCOX transformation, <code>_VALUE_</code> is set equal to the λ parameter value. For <code>_COMPONENT_=SEASONAL</code> , if <code>_VALUE_</code> is nonmissing, then <code>_VALUE_</code> is used as the seasonal period. If <code>_VALUE_</code> is missing for <code>_COMPONENT_=SEASONAL</code> , then the seasonal period is determined by the interval of the series.
<code>_FACTOR_</code>	applies only to the AR and MA portions of the ARIMA model. The value of <code>_FACTOR_</code> identifies the factor of the given AR or MA term. Therefore, the value of <code>_FACTOR_</code> is the same for all observations that are related to the same factor.
<code>_LAG_</code>	identifies the degree for differencing and AR and MA lags. If <code>_COMPONENT_=SEASONAL</code> , then the value in <code>_LAG_</code> is multiplied by the seasonal period indicated by the value of <code>_VALUE_</code> .
<code>_SHIFT_</code>	contains the shift value for transfer functions. This value is not processed by PROC X12, but it might be processed by other procedures in which transfer functions can be specified.
<code>_NOEST_</code>	indicates whether a parameter associated with the observation is to be estimated. For example, the NOINT option is indicated by <code>_COMPONENT_=CONSTANT</code> with <code>_NOEST_=1</code> and <code>_EST_=0</code> . <code>_NOEST_=1</code> indicates that the value in <code>_EST_</code> is a fixed value. <code>_NOEST_</code> pertains to the constant term, to AR and MA parameters, and to regression parameters.
<code>_EST_</code>	contains an initial or fixed value for a parameter associated with the observation that is to be estimated. <code>_NOEST_=1</code> indicates the value in <code>_EST_</code> is a fixed value. <code>_EST_</code> pertains to the constant term, to AR and MA parameters, and to regression parameters.

<code>_STDERR_</code>	contains output information about estimated parameters. The variable <code>_STDERR_</code> is not processed by the <code>MDLINFOIN=</code> data set for PROC X12. In the <code>MDLINFOOUT=</code> data set, <code>_STDERR_</code> contains the standard error that pertains to the estimated parameter in the variable <code>_EST_</code> .
<code>_TVALUE_</code>	contains output information about estimated parameters. The variable <code>_TVALUE_</code> is not processed by the <code>MDLINFOIN=</code> data set for PROC X12. In the <code>MDLINFOOUT=</code> data set, <code>_TVALUE_</code> contains the t value that pertains to the estimated parameter in the variable <code>_EST_</code> .
<code>_PVALUE_</code>	contains output information about estimated parameters. The variable <code>_PVALUE_</code> is not processed by the <code>MDLINFOIN=</code> data set for PROC X12. In the <code>MDLINFOOUT=</code> data set, <code>_PVALUE_</code> contains the p -value that pertains to the estimated parameter in the variable <code>_EST_</code> .

INEVENT= Data Set

The `INEVENT=` data set can contain the following variables. When a variable is omitted from the data set, that variable is assumed to have the default value for all observations. The default values are specified in the list.

<code>_NAME_</code>	specifies the event variable name. <code>_NAME_</code> is displayed with the case preserved. Since <code>_NAME_</code> is a SAS variable name, the event can be referenced by using any case. The <code>_NAME_</code> variable is required; there is no default.
<code>_CLASS_</code>	specifies the class of event: <code>SIMPLE</code> , <code>COMBINATION</code> , <code>PREDEFINED</code> . The default for <code>_CLASS_</code> is <code>SIMPLE</code> .
<code>_KEYNAME_</code>	contains either a date keyword (<code>SIMPLE EVENT</code>), a predefined event variable name (<code>PREDEFINED EVENT</code>), or an event name (<code>COMBINATION EVENT</code>). All <code>_KEYNAME_</code> values are displayed in upper case. However, if the <code>_KEYNAME_</code> value refers to an event name, then the actual name can be of mixed case. The default for <code>_KEYNAME_</code> is no keyname, designated by “.”.
<code>_STARTDATE_</code>	contains either the date timing value or the first date timing value to use in a do-list. The default for <code>_STARTDATE_</code> is no date, designated by a missing value.
<code>_ENDDATE_</code>	contains the last date timing value to use in a do-list. The default for <code>_ENDDATE_</code> is no date, designated by a missing value.
<code>_DATEINTRVL_</code>	contains the interval for the date do-list. The default for <code>_DATEINTRVL_</code> is no interval, designated by “.”.
<code>_STARTDT_</code>	contains either the datetime timing value or the first datetime timing value to use in a do-list. The default for <code>_STARTDT_</code> is no datetime, designated by a missing value.
<code>_ENDDT_</code>	contains the last datetime timing value to use in a do-list. The default for <code>_ENDDT_</code> is no datetime, designated by a missing value.
<code>_DTINTRVL_</code>	contains the interval for the datetime do-list. The default for <code>_DTINTRVL_</code> is no interval, designated by “.”.
<code>_STARTOBS_</code>	contains either the observation number timing value or the first observation number timing value to use in a do-list. The default for <code>_STARTOBS_</code> is no observation number, designated by a missing value.

<code>_ENDOBS_</code>	contains the last observation number timing value to use in a do-list. The default for <code>_ENDOBS_</code> is no observation number, designated by a missing value.
<code>_OBSINTRVL_</code>	contains the interval length of the observation number do-list. The default for <code>_OBSINTRVL_</code> is no interval, designated by “.”.
<code>_TYPE_</code>	specifies the type of event. The valid values of <code>_TYPE_</code> are POINT, LS, RAMP, TR, TEMPRAMP, TC, LIN, LINEAR, QUAD, CUBIC, INV, INVERSE, LOG, and LOGARITHMIC. The default for <code>_TYPE_</code> is POINT.
<code>_VALUE_</code>	specifies the value for nonzero observation. The default for <code>_VALUE_</code> is 1.0.
<code>_PULSE_</code>	specifies the interval that defines the units for the duration values. The default for <code>_PULSE_</code> is no interval, designated by “.”.
<code>_DUR_BEFORE_</code>	specifies the number of durations before the timing value. The default for <code>_DUR_BEFORE_</code> is 0.
<code>_DUR_AFTER_</code>	specifies the number of durations after the timing value. The default for <code>_DUR_AFTER_</code> is 0.
<code>_SLOPE_BEF_</code>	determines whether the curve is GROWTH or DECAY before the timing value for <code>_TYPE_=RAMP</code> , <code>_TYPE_=TEMPRAMP</code> , and <code>_TYPE_=TC</code> . Valid values are GROWTH and DECAY. The default for <code>_SLOPE_BEF_</code> is GROWTH.
<code>_SLOPE_AFT_</code>	determines whether the curve is GROWTH or DECAY after the timing value for <code>_TYPE_=RAMP</code> , <code>_TYPE_=TEMPRAMP</code> , and <code>_TYPE_=TC</code> . Valid values are GROWTH and DECAY. The default for <code>_SLOPE_AFT_</code> is GROWTH unless <code>_TYPE_=TC</code> ; then the default is DECAY.
<code>_SHIFT_</code>	specifies the number of <code>_PULSE_</code> intervals to shift the timing value. The shift can be positive (forward in time) or negative (backward in time). If <code>_PULSE_</code> is not specified, then the shift is in observations. The default for <code>_SHIFT_</code> is 0.
<code>_TCPARM_</code>	specifies the parameter for EVENT of TYPE=TC. The default for <code>_TCPARM_</code> is 0.5.
<code>_RULE_</code>	specifies the rule to use when combining events or when timing values of an event overlap. The valid values of <code>_RULE_</code> are ADD, MAX, MIN, MINNZ, MINMAG, and MULT. The default for <code>_RULE_</code> is ADD.
<code>_PERIOD_</code>	specifies the frequency interval at which the event should be repeated. If this value is missing, then the event is not periodic. The default for <code>_PERIOD_</code> is no interval, designated by “.”.
<code>_LABEL_</code>	specifies the label or description for the event. If a label is not specified, then the default label value is displayed as “.”. For events that produce dummy variables, either the user-supplied label or the default label is used. For COMPLEX events, the <code>_LABEL_</code> value is merely a description of the group of events.

OUTSTAT= Data Set

The OUTSTAT= data set can contain the following variables:

BY variables	sorts the statistics into BY groups. BY variables are included in this data set that match the BY variables used to process the series.
NAME	specifies the variable name of the time series to which the statistics apply.
STAT	describes the statistic that is stored in VALUE or CVALUE. STAT takes on the following values:
Period	the period of the series, 4 or 12.
Mode	the mode of the seasonal adjustment from the X11 statement. Possible values are ADD, MULT, LOGADD, and PSEUDOADD.
Start	the beginning of the model span expressed as <i>monyyyy</i> for monthly series or <i>yyyyQq</i> for quarterly series.
End	the end of the model span expressed as <i>monyyyy</i> for monthly series or <i>yyyyQq</i> for quarterly series.
NbFcst	the number of forecast observations.
SigmaLimLower	the lower sigma limit in standard deviation units.
SigmaLimUpper	the upper sigma limit in standard deviation units.
pLBQ_24	the Ljung-Box Q statistic of the residuals at lag 24, for monthly series. Note that lag 12 (pLBQ_12) and lag 16 (pLBQ_16) are included in the data set for quarterly series.
D8Fs	the stable seasonality <i>F</i> test value from Table D8.
D8Fm	the moving seasonality <i>F</i> test value from Table D8.
ISRatio	the final irregular-to-seasonal ratio from Table F 2.H.
SMA_ALL	the final seasonal moving average filter for all periods.
RSF	the residual seasonality <i>F</i> test value for Table D11 for the entire series.
RSF3	the residual seasonality <i>F</i> test value for Table D11 for the last three years.
RSFA	the residual seasonality <i>F</i> test value for Table D11.A for the entire series.
RSF3A	the residual seasonality <i>F</i> test value for Table D11.A for the last three years.
RSFR	the residual seasonality <i>F</i> test value for Table D11.R for the entire series.
RSF3R	the residual seasonality <i>F</i> test value for Table D11.R for the last three years.
TMA	the Henderson trend moving average filter selected.
ICRatio	the final irregular-to-trend cycle ratio from Table F 2.H.

E5sd	the standard deviation from Table E5.
E6sd	the standard deviation from Table E6.
E6Asd	the standard deviation from Table E6.A.
MCD	months of cyclical dominance.
Q	the overall level Q from Table F3.
Q2	Q overall level without M2 from Table F3.
FMT	indicates whether the format is numeric or character. FMT="NUM" if the value is numeric and stored in the VALUE variable. FMT="CHAR" if the value is a string and stored in the CVALUE variable.
VALUE	contains the numerical value of the statistic or missing if the statistic is of type character.
CVALUE	contains the character value of the text statistic or blank if the statistic is of type numeric.

Examples: X12 Procedure

Example 37.1: ARIMA Model Identification

This example shows typical PROC X12 statements that are used for ARIMA model identification. This example invokes the X12 procedure and uses the TRANSFORM and IDENTIFY statements. It specifies the time series data, takes the logarithm of the series (TRANSFORM statement), and generates ACFs and PACFs for the specified levels of differencing (IDENTIFY statement). The ACFs and PACFs for DIFF=1 and SDIFF=1 are shown in [Output 37.1.1](#), [Output 37.1.2](#), [Output 37.1.3](#), and [Output 37.1.4](#). The data set is the same as in the section “[Basic Seasonal Adjustment](#)” on page 2470.

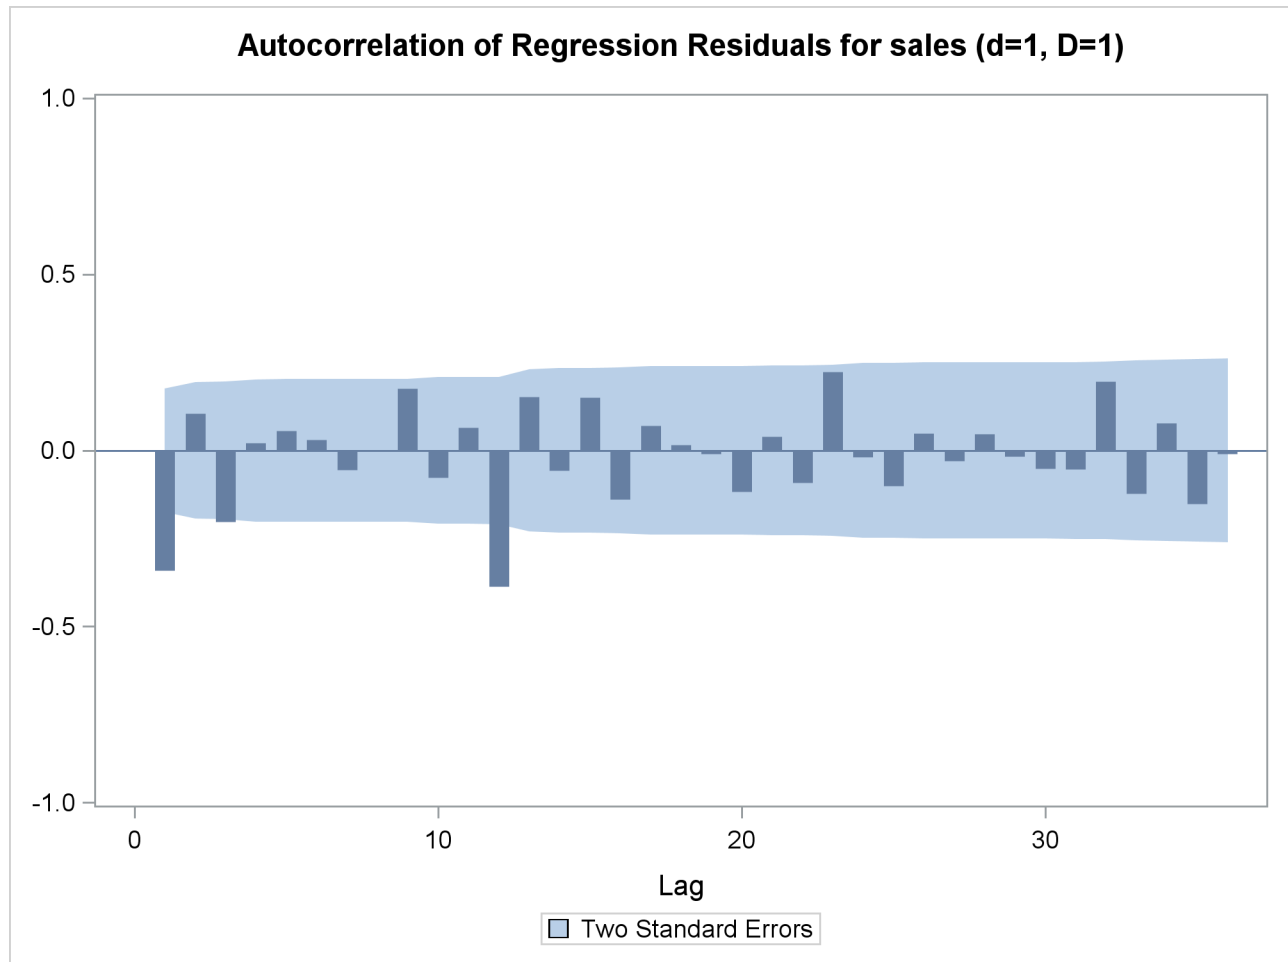
The graphical displays are available when ODS Graphics is enabled. For more information about the graphics available in the X12 procedure, see the section “[ODS Graphics](#)” on page 2523.

```
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  identify diff=(0,1) sdiff=(0,1);
run;
```

Output 37.1.1 ACFs (Nonseasonal Order=1 Seasonal Order=1)

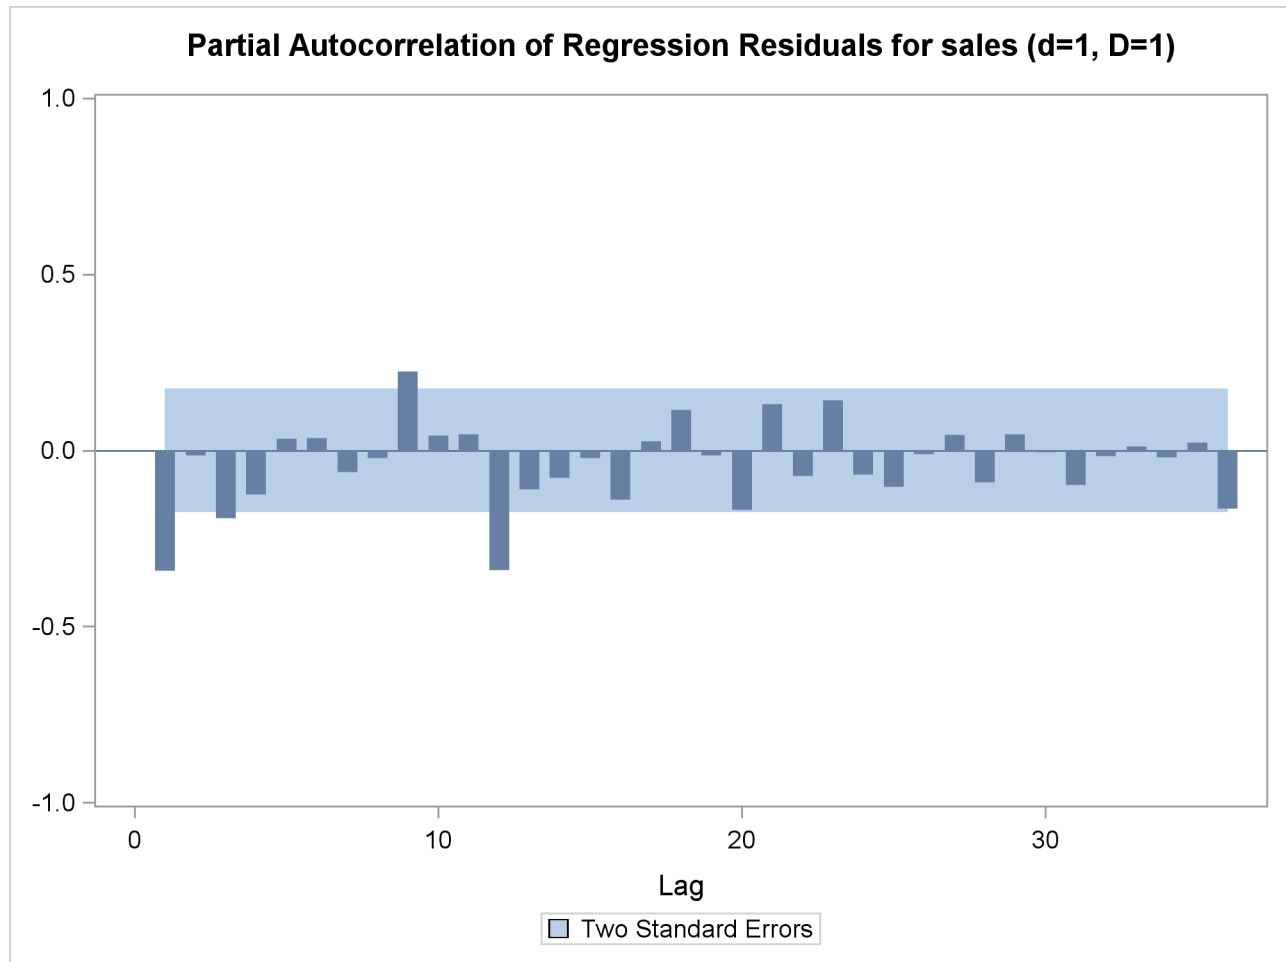
The X12 Procedure					
Autocorrelation of Regression Residuals for ARIMA Model Identification					
For Variable sales					
Differencing: Nonseasonal Order=1 Seasonal Order=1					
Lag	Correlation	Standard Error	Chi-Square	DF	Pr > ChiSq
1	-0.34112	0.08737	15.5957	1	<.0001
2	0.10505	0.09701	17.0860	2	0.0002
3	-0.20214	0.09787	22.6478	3	<.0001
4	0.02136	0.10101	22.7104	4	0.0001
5	0.05565	0.10104	23.1387	5	0.0003
6	0.03080	0.10128	23.2709	6	0.0007
7	-0.05558	0.10135	23.7050	7	0.0013
8	-0.00076	0.10158	23.7050	8	0.0026
9	0.17637	0.10158	28.1473	9	0.0009
10	-0.07636	0.10389	28.9869	10	0.0013
11	0.06438	0.10432	29.5887	11	0.0018
12	-0.38661	0.10462	51.4728	12	<.0001
13	0.15160	0.11501	54.8664	13	<.0001
14	-0.05761	0.11653	55.3605	14	<.0001
15	0.14957	0.11674	58.7204	15	<.0001
16	-0.13894	0.11820	61.6452	16	<.0001
17	0.07048	0.11944	62.4045	17	<.0001
18	0.01563	0.11975	62.4421	18	<.0001
19	-0.01061	0.11977	62.4596	19	<.0001
20	-0.11673	0.11978	64.5984	20	<.0001
21	0.03855	0.12064	64.8338	21	<.0001
22	-0.09136	0.12074	66.1681	22	<.0001
23	0.22327	0.12126	74.2099	23	<.0001
24	-0.01842	0.12436	74.2652	24	<.0001
25	-0.10029	0.12438	75.9183	25	<.0001
26	0.04857	0.12500	76.3097	26	<.0001
27	-0.03024	0.12514	76.4629	27	<.0001
28	0.04713	0.12520	76.8387	28	<.0001
29	-0.01803	0.12533	76.8943	29	<.0001
30	-0.05107	0.12535	77.3442	30	<.0001
31	-0.05377	0.12551	77.8478	31	<.0001
32	0.19573	0.12569	84.5900	32	<.0001
33	-0.12242	0.12799	87.2543	33	<.0001
34	0.07775	0.12888	88.3401	34	<.0001
35	-0.15245	0.12924	92.5584	35	<.0001
36	-0.01000	0.13061	92.5767	36	<.0001

NOTE: The P-values approximate the probability of observing a Chi-Square at least this large when the model fitted is correct. When DF is positive, small values of P, customarily those below 0.05, indicate model inadequacy.

Output 37.1.2 Plot for ACFs (Nonseasonal Order=1 Seasonal Order=1)

Output 37.1.3 PACFs (Nonseasonal Order=1 Seasonal Order=1)

Partial Autocorrelations of Regression Residuals for ARIMA Model Identification For Variable sales Differencing: Nonseasonal Order=1 Seasonal Order=1		
Lag	Correlation	Standard Error
1	-0.34112	0.08737
2	-0.01281	0.08737
3	-0.19266	0.08737
4	-0.12503	0.08737
5	0.03309	0.08737
6	0.03468	0.08737
7	-0.06019	0.08737
8	-0.02022	0.08737
9	0.22558	0.08737
10	0.04307	0.08737
11	0.04659	0.08737
12	-0.33869	0.08737
13	-0.10918	0.08737
14	-0.07684	0.08737
15	-0.02175	0.08737
16	-0.13955	0.08737
17	0.02589	0.08737
18	0.11482	0.08737
19	-0.01316	0.08737
20	-0.16743	0.08737
21	0.13240	0.08737
22	-0.07204	0.08737
23	0.14285	0.08737
24	-0.06733	0.08737
25	-0.10267	0.08737
26	-0.01007	0.08737
27	0.04378	0.08737
28	-0.08995	0.08737
29	0.04690	0.08737
30	-0.00490	0.08737
31	-0.09638	0.08737
32	-0.01528	0.08737
33	0.01150	0.08737
34	-0.01916	0.08737
35	0.02303	0.08737
36	-0.16488	0.08737

Output 37.1.4 Plot for PACFs (Nonseasonal Order=1 Seasonal Order=1)

Example 37.2: Model Estimation

After studying the output from [Example 37.1](#) and identifying the ARIMA part of the model as, for example, (0 1 1)(0 1 1) 12, you can replace the IDENTIFY statement with the ARIMA and ESTIMATE statements as follows:

```
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  arima model= ( 0,1,1 ) (0,1,1) );
  estimate;
run ;
```

The parameter estimates and estimation summary statistics are shown in [Output 37.2.1](#).

Output 37.2.1 Estimation Data

The X12 Procedure					
Exact ARMA Likelihood Estimation Iteration Tolerances For Variable sales					
Maximum Total ARMA Iterations		1500			
Convergence Tolerance		1.0E-05			
Average absolute percentage error in within-sample forecasts: For Variable sales					
Last year:		2.81			
Last-1 year:		6.38			
Last-2 year:		7.69			
Last three years:		5.63			
Exact ARMA Likelihood Estimation Iteration Summary For Variable sales					
Number of ARMA iterations		6			
Number of Function Evaluations		19			
Exact ARMA Maximum Likelihood Estimation For Variable sales					
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t
Nonseasonal MA	1	0.40181	0.07887	5.09	<.0001
Seasonal MA	12	0.55695	0.07626	7.30	<.0001
Estimation Summary For Variable sales					
Number of Observations		144			
Number of Residuals		131			
Number of Parameters Estimated		3			
Variance Estimate		1.3E-03			
Standard Error Estimate		3.7E-02			
Standard Error of Variance		1.7E-04			
Log likelihood		244.6965			
Transformation Adjustment		-735.2943			
Adjusted Log likelihood		-490.5978			
AIC		987.1956			
AICC (F-corrected-AIC)		987.3845			
Hannan Quinn		990.7005			
BIC		995.8211			

Example 37.3: Seasonal Adjustment

Assuming that the model in [Example 37.2](#) is satisfactory, a seasonal adjustment that uses forecast extension can be performed by adding the X11 statement to the procedure. By default, the data is forecast one year ahead at the end of the series.

```
ods output D8A#1=SalesD8A_1;
ods output D8A#2=SalesD8A_2;
ods output D8A#3=SalesD8A_3;
ods output D8A#4=SalesD8A_4;
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  arima model=( 0,1,1) (0,1,1) );
  estimate;
  x11;
run;

title 'Stable Seasonality Test';
proc print data=SalesD8A_1 LABEL;
run;

title 'Nonparametric Stable Seasonality Test';
proc print data=SalesD8A_2 LABEL;
run;

title 'Moving Seasonality Test';
proc print data=SalesD8A_3 LABEL;
run;

title 'Combined Seasonality Test';
proc print data=SalesD8A_4 LABEL NOOBS;
  var _NAME_ Name1 Label1 cValue1;
run;
```

Table D8A, which contains the seasonality tests, is shown in [Output 37.3.1](#).

Output 37.3.1 Table D8A as Displayed

The X12 Procedure					
Table D 8.A: F-tests for Seasonality					
For Variable sales					
Test for the Presence of Seasonality Assuming Stability					
	Sum of	DF	Mean	F-Value	
	Squares		Square		
Between Months	23571.41	11	2142.855	190.9544	**
Residual	1481.28	132	11.22182		
Total	25052.69	143			
** Seasonality present at the 0.1 percent level.					

Output 37.3.1 *continued*

Nonparametric Test for the Presence of Seasonality Assuming Stability					
Kruskal- Wallis Statistic	DF	Probability Level			
131.9546	11	.00%			
Seasonality present at the one percent level.					
Moving Seasonality Test					
Sum of Squares	DF	Mean Square	F-Value		
Between Years	259.2517	10	25.92517	3.370317	**
Error	846.1424	110	7.692204		
**Moving seasonality present at the one percent level.					
Summary of Results and Combined Test for the Presence of Identifiable Seasonality					
Seasonality Tests:			Probability Level		
Stable Seasonality F-test			0.000		
Moving Seasonality F-test			0.001		
Kruskal-Wallis Chi-square Test			0.000		
Combined Measures:			Value		
T1 = 7/F_Stable			0.04		
T2 = 3*F_Moving/F_Stable			0.05		
T = (T1 + T2)/2			0.04		
Combined Test of Identifiable Seasonality:			Present		

The four ODS statements in the preceding example direct output from the D8A tables into four data sets: SalesD8A_1, SalesD8A_2, SalesD8A_3, and SalesD8A_4. It is best to direct the output to four different data sets because the four tables associated with Table D8A have varying formats. The ODS data sets are shown in [Output 37.3.2](#), [Output 37.3.3](#), [Output 37.3.4](#), and [Output 37.3.5](#).

Output 37.3.2 Table D8A Output in Data Set SalesD8A_1

Stable Seasonality Test							
Obs	_NAME_	FT_SRC	Sum of Squares	DF	Mean Square	F-Value	FT_AST
1	sales	Between Months	23571.41	11	2142.855	190.9544	**
2	sales	Residual	1481.28	132	11.22182	.	.
3	sales	Total	25052.69	143	.	.	.

Output 37.3.3 Table D8A Output in Data Set SalesD8A_2

Nonparametric Stable Seasonality Test				
Obs	_NAME_	Kruskal-Wallis Statistic	DF	Probability Level
1	sales	131.9546	11	.00%

Output 37.3.4 Table D8A Output in Data Set SalesD8A_3

Moving Seasonality Test							
Obs	_NAME_	FT_SRC	Sum of Squares	DF	Mean Square	F-Value	FT_AST
1	sales	Between Years	259.2517	10	25.92517	3.370317	**
2	sales	Error	846.1424	110	7.692204	.	

Output 37.3.5 Table D8A Output in Data Set SalesD8A_4

Combined Seasonality Test			
NAME	Name1	Label1	cValue1
sales		Seasonality Tests:	Probability Level
sales			
sales	P_STABLE	Stable Seasonality F-test	0.000
sales	P_MOV	Moving Seasonality F-test	0.001
sales	P_KW	Kruskal-Wallis Chi-square Test	0.000
sales			
sales		Combined Measures:	Value
sales			
sales	T1	T1 = 7/F_Stable	0.04
sales	T2	T2 = 3*F_Moving/F_Stable	0.05
sales	T	T = (T1 + T2)/2	0.04
sales			
sales	IDSeasTest	Combined Test of Identifiable Seasonality: Present	

Example 37.4: RegARIMA Automatic Model Selection

This example demonstrates regARIMA modeling and TRAMO-based automatic model selection, which is available with the AUTOMDL statement. ODS SELECT statements are used to limit the displayed output to the model selection and estimation stages. The same data set is used as in the previous examples.

```

title 'TRAMO Automatic Model Identification';
ods select ModelEstimation.AutoModel.UnitRootTestModel
           ModelEstimation.AutoModel.UnitRootTest
           ModelEstimation.AutoModel.AutoChoiceModel
           ModelEstimation.AutoModel.Best5Model
           ModelEstimation.AutoModelAutomaticModelChoice
           ModelEstimation.AutoModel.FinalModelChoice
           ModelEstimation.AutoModel.AutomdlNote;
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  regression predefined=td;
  automdl maxorder=(1,1)
         print=unitroottest unitroottestmdl autochoicemdl best5model;
  estimate;
  x11;
  output out=out(obs=23) a1 a2 a6 b1 c17 c20 d1 d7 d8 d9 d10
         d11 d12 d13 d16 d18;
run;
proc print data=out(obs=23);
  title 'Output Variables Related to Trading Day Regression';
run;

```

The automatic model selection output is shown in [Output 37.4.1](#), [Output 37.4.2](#), and [Output 37.4.3](#). The first table, “ARIMA Estimate for Unit Root Identification,” gives details of the method that TRAMO uses to automatically select the orders of differencing. The second table, “Results of Unit Root Test for Identifying Orders of Differencing,” shows that a regular difference order of 1 and a seasonal difference order of 1 has been determined by TRAMO. The third table, “Models Estimated by Automatic ARIMA Model Selection Procedure,” shows all the models examined by the TRAMO-based method. The fourth table, “Best Five ARIMA Models Chosen by Automatic Modeling,” shows the top five models in order of rank and their BIC2 statistic. The fifth table, “Comparison of Automatically Selected Model and Default Model,” compares the model selected by the TRAMO model to the default X-12-ARIMA model. The sixth table, “Final Automatic Model Selection,” shows which model was actually selected.

Output 37.4.1 Output from the AUTOMDL Statement

TRAMO Automatic Model Identification					
The X12 Procedure					
ARIMA Estimates for Unit Root Identification					
For Variable sales					
Model Number	Estimation Method	Estimated Model	ARMA Parameter	Estimate	
1	H-R	(2, 0, 0) (1, 0, 0)	NS_AR_1	0.67540	
	H-R	(2, 0, 0) (1, 0, 0)	NS_AR_2	0.28425	
	H-R	(2, 0, 0) (1, 0, 0)	S_AR_12	0.91963	
2	H-R	(1, 1, 1) (1, 0, 1)	NS_AR_1	0.13418	
	H-R	(1, 1, 1) (1, 0, 1)	S_AR_12	0.98500	
	H-R	(1, 1, 1) (1, 0, 1)	NS_MA_1	0.47884	
	H-R	(1, 1, 1) (1, 0, 1)	S_MA_12	0.51726	
3	H-R	(1, 1, 1) (1, 1, 1)	NS_AR_1	-0.39269	
	H-R	(1, 1, 1) (1, 1, 1)	S_AR_12	0.06223	
	H-R	(1, 1, 1) (1, 1, 1)	NS_MA_1	-0.09570	
	H-R	(1, 1, 1) (1, 1, 1)	S_MA_12	0.58536	
Results of Unit Root Test for					
Identifying Orders of Differencing					
For Variable sales					
	Regular difference order	Seasonal difference order	Mean Significant		
	1	1	no		

Output 37.4.2 Output from the AUTOMDL Statement

Models estimated by Automatic ARIMA Model Selection procedure For Variable sales						
Model Number	Estimated Model	ARMA Parameter	Estimate	Statistics of Fit		
				BIC	BIC2	
1	(3, 1, 0) (0, 1, 0)	NS_AR_1	-0.33524	1024.469	-3.40549	
	(3, 1, 0) (0, 1, 0)	NS_AR_2	-0.05558			
	(3, 1, 0) (0, 1, 0)	NS_AR_3	-0.15649			
	(3, 1, 0) (0, 1, 0)					
2	(3, 1, 0) (0, 1, 1)	NS_AR_1	-0.33186	993.7880	-3.63970	
	(3, 1, 0) (0, 1, 1)	NS_AR_2	-0.05823			
	(3, 1, 0) (0, 1, 1)	NS_AR_3	-0.15200			
	(3, 1, 0) (0, 1, 1)	S_MA_12	0.55279			
	(3, 1, 0) (0, 1, 1)					
3	(3, 1, 0) (1, 1, 0)	NS_AR_1	-0.38673	1000.224	-3.59057	
	(3, 1, 0) (1, 1, 0)	NS_AR_2	-0.08768			
	(3, 1, 0) (1, 1, 0)	NS_AR_3	-0.18143			
	(3, 1, 0) (1, 1, 0)	S_AR_12	-0.47336			
	(3, 1, 0) (1, 1, 0)					
4	(3, 1, 0) (1, 1, 1)	NS_AR_1	-0.34352	998.0548	-3.60713	
	(3, 1, 0) (1, 1, 1)	NS_AR_2	-0.06504			
	(3, 1, 0) (1, 1, 1)	NS_AR_3	-0.15728			
	(3, 1, 0) (1, 1, 1)	S_AR_12	-0.12163			
	(3, 1, 0) (1, 1, 1)	S_MA_12	0.47073			
	(3, 1, 0) (1, 1, 1)					
5	(0, 1, 0) (0, 1, 1)	S_MA_12	0.60446	996.8560	-3.61628	
	(0, 1, 0) (0, 1, 1)					
6	(0, 1, 1) (0, 1, 1)	NS_MA_1	0.36272	986.6405	-3.69426	
	(0, 1, 1) (0, 1, 1)	S_MA_12	0.55599			
	(0, 1, 1) (0, 1, 1)					
7	(1, 1, 0) (0, 1, 1)	NS_AR_1	-0.32734	987.1500	-3.69037	
	(1, 1, 0) (0, 1, 1)	S_MA_12	0.55834			
	(1, 1, 0) (0, 1, 1)					
8	(1, 1, 1) (0, 1, 1)	NS_AR_1	0.17833	991.2363	-3.65918	
	(1, 1, 1) (0, 1, 1)	NS_MA_1	0.52867			
	(1, 1, 1) (0, 1, 1)	S_MA_12	0.56212			
	(1, 1, 1) (0, 1, 1)					
9	(0, 1, 1) (0, 1, 0)	NS_MA_1	0.36005	1017.770	-3.45663	
	(0, 1, 1) (0, 1, 0)					

Output 37.4.3 Output from the AUTOMDL Statement

TRAMO Automatic Model Identification				
The X12 Procedure				
Automatic ARIMA Model Selection				
Methodology based on research by Gomez and Maravall (2000).				
Best Five ARIMA Models Chosen by Automatic Modeling For Variable sales				
Rank	Estimated Model	BIC2		
1	(0, 1, 1)(0, 1, 1)	-3.69426		
2	(1, 1, 0)(0, 1, 1)	-3.69037		
3	(1, 1, 1)(0, 1, 1)	-3.65918		
4	(0, 1, 0)(0, 1, 1)	-3.61628		
5	(0, 1, 1)(0, 1, 0)	-3.45663		
Comparison of Automatically Selected Model and Default Model For Variable sales				
Source of Candidate Models	Estimated Model	Statistics of Fit		
		Plbox	Rvr	
Automatic Model Choice	(0, 1, 1)(0, 1, 1)	0.62560	0.03546	
Airline Model (Default)	(0, 1, 1)(0, 1, 1)	0.62561	0.03546	
Comparison of Automatically Selected Model and Default Model For Variable sales				
Source of Candidate Models	Estimated Model	Statistics of Fit		
		Plbox	Rvr	Number of Outliers
Automatic Model Choice	(0, 1, 1)(0, 1, 1)	0.62560	0.03546	0
Airline Model (Default)	(0, 1, 1)(0, 1, 1)	0.62561	0.03546	0
Final Automatic Model Selection For Variable sales				
Source of Model	Estimated Model			
Automatic Model Choice	(0, 1, 1)(0, 1, 1)			

Table 37.14 and Output 37.4.4 illustrate the regARIMA modeling method. Table 37.14 shows the relationship between the output variables in PROC X12 that results from a regARIMA model. Note that some of these formulas apply only to this example. Output 37.4.4 shows the values of these variables for the first 23 observations in the example.

Table 37.14 regARIMA Output Variables and Descriptions

Table	Title	Type	Formula
A1	Time series data (for the span analyzed)	Data	Input
A2	Prior-adjustment factors leap year (from trading day regression) adjustments	Factor	Calculated from regression
A6	RegARIMA trading day component leap year prior adjustments included from Table A2	Factor	Calculated from regression
B1	Original series (prior adjusted) (adjusted for regARIMA factors)	Data	$B1 = A1/A6 *$ * because only TD specified
C17	Final weights for irregular component	Factor	Calculated using moving standard deviation
C20	Final extreme value adjustment factors	Factor	Calculated using C16 and C17
D1	Modified original data, D iteration	Data	$D1 = B1/C20 **$ $D1 = C19/C20$ ** C19=B1 in this example
D7	Preliminary trend cycle, D iteration	Data	Calculated using Henderson moving average
D8	Final unmodified SI ratios	Factor	$D8 = B1/D7 ***$ $D8 = C19/D7$ *** TD specified in regression
D9	Final replacement values for SI ratios	Factor	If C17 shows extreme values, $D9 = D1/D7$; $D9 = .$ otherwise
D10	Final seasonal factors	Factor	Calculated using moving averages
D11	Final seasonally adjusted data (also adjusted for trading day)	Data	$D11 = B1/D10 ****$ $D11 = C19/D10$ **** $B1 = C19$ for this example
D12	Final trend cycle	Data	Calculated using Henderson moving average
D13	Final irregular component	Factor	$D13 = D11/D12$
D16	Combined adjustment factors (includes seasonal, trading day factors)	Factor	$D16 = A1/D11$
D18	Combined calendar adjustment factors (includes trading day factors)	Factor	$D18 = D16/D10$ $D18 = A6 *****$ ***** regression TD is the only calendar adjustment factor in this example

Output 37.4.4 Output Variables Related to Trading Day Regression

Output Variables Related to Trading Day Regression									
Obs	DATE	sales_A1	sales_A2	sales_A6	sales_B1	sales_C17	sales_C20	sales_D1	sales_D7
1	SEP78	112	1.00000	1.01328	110.532	1.00000	1.00000	110.532	124.138
2	OCT78	118	1.00000	0.99727	118.323	1.00000	1.00000	118.323	124.905
3	NOV78	132	1.00000	0.98960	133.388	1.00000	1.00000	133.388	125.646
4	DEC78	129	1.00000	1.00957	127.777	1.00000	1.00000	127.777	126.231
5	JAN79	121	1.00000	0.99408	121.721	1.00000	1.00000	121.721	126.557
6	FEB79	135	0.99115	0.99115	136.205	1.00000	1.00000	136.205	126.678
7	MAR79	148	1.00000	1.00966	146.584	1.00000	1.00000	146.584	126.825
8	APR79	148	1.00000	0.99279	149.075	1.00000	1.00000	149.075	127.038
9	MAY79	136	1.00000	0.99406	136.813	1.00000	1.00000	136.813	127.433
10	JUN79	119	1.00000	1.01328	117.440	1.00000	1.00000	117.440	127.900
11	JUL79	104	1.00000	0.99727	104.285	1.00000	1.00000	104.285	128.499
12	AUG79	118	1.00000	0.99678	118.381	1.00000	1.00000	118.381	129.253
13	SEP79	115	1.00000	1.00229	114.737	0.98630	0.99964	114.778	130.160
14	OCT79	126	1.00000	0.99408	126.751	0.88092	1.00320	126.346	131.238
15	NOV79	141	1.00000	1.00366	140.486	1.00000	1.00000	140.486	132.699
16	DEC79	135	1.00000	0.99872	135.173	1.00000	1.00000	135.173	134.595
17	JAN80	125	1.00000	0.99406	125.747	0.00000	0.95084	132.248	136.820
18	FEB80	149	1.02655	1.03400	144.100	1.00000	1.00000	144.100	139.215
19	MAR80	170	1.00000	0.99872	170.217	1.00000	1.00000	170.217	141.559
20	APR80	170	1.00000	0.99763	170.404	1.00000	1.00000	170.404	143.777
21	MAY80	158	1.00000	1.00966	156.489	1.00000	1.00000	156.489	145.925
22	JUN80	133	1.00000	0.99279	133.966	1.00000	1.00000	133.966	148.133
23	JUL80	114	1.00000	0.99406	114.681	0.00000	0.94057	121.927	150.682

Obs	sales_D8	sales_D9	sales_D10	sales_D11	sales_D12	sales_D13	sales_D16	sales_D18
1	0.89040	.	0.90264	122.453	124.448	0.98398	0.91463	1.01328
2	0.94731	.	0.94328	125.438	125.115	1.00258	0.94070	0.99727
3	1.06161	.	1.06320	125.459	125.723	0.99790	1.05214	0.98960
4	1.01225	.	0.99534	128.375	126.205	1.01720	1.00487	1.00957
5	0.96179	.	0.97312	125.083	126.479	0.98896	0.96735	0.99408
6	1.07521	.	1.05931	128.579	126.587	1.01574	1.04994	0.99115
7	1.15580	.	1.17842	124.391	126.723	0.98160	1.18980	1.00966
8	1.17347	.	1.18283	126.033	126.902	0.99315	1.17430	0.99279
9	1.07360	.	1.06125	128.916	127.257	1.01303	1.05495	0.99406
10	0.91822	.	0.91663	128.121	127.747	1.00293	0.92881	1.01328
11	0.81156	.	0.81329	128.226	128.421	0.99848	0.81107	0.99727
12	0.91589	.	0.91135	129.897	129.316	1.00449	0.90841	0.99678
13	0.88151	0.88182	0.90514	126.761	130.347	0.97249	0.90722	1.00229
14	0.96581	0.96273	0.93820	135.100	131.507	1.02732	0.93264	0.99408
15	1.05869	.	1.06183	132.306	132.937	0.99525	1.06571	1.00366
16	1.00429	.	0.99339	136.072	134.720	1.01004	0.99212	0.99872
17	0.91906	0.96658	0.97481	128.996	136.763	0.94321	0.96902	0.99406
18	1.03509	.	1.06153	135.748	138.996	0.97663	1.09762	1.03400
19	1.20245	.	1.17965	144.295	141.221	1.02177	1.17814	0.99872
20	1.18520	.	1.18499	143.802	143.397	1.00283	1.18218	0.99763
21	1.07239	.	1.06005	147.624	145.591	1.01397	1.07028	1.00966
22	0.90436	.	0.91971	145.662	147.968	0.98442	0.91307	0.99279
23	0.76108	0.80917	0.81275	141.103	150.771	0.93588	0.80792	0.99406

Example 37.5: Automatic Outlier Detection

This example demonstrates the use of the OUTLIER statement to automatically detect and remove outliers from a time series to be seasonally adjusted. The data set is the same as in the section “Basic Seasonal Adjustment” on page 2470 and the previous examples. Adding the OUTLIER statement to Example 37.3 requests that outliers be detected by using the default critical value as described in the section “OUTLIER Statement” on page 2496. The tables associated with outlier detection for this example are shown in Output 37.5.1. The first table shows the critical values; the second table shows that a single potential outlier was identified; the third table shows the estimates for the ARMA parameters. Since no outliers are included in the regression model, the “Regression Model Parameter Estimates” table is not displayed. Because only a potential outlier was identified, and not an actual outlier, in this case the A1 series and the B1 series are identical.

```
title 'Automatic Outlier Identification';
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  arima model=( 0,1,1) (0,1,1) );
  outlier;
  estimate;
  x11;
  output out=nooutlier a1 b1 d10;
run ;
```

Output 37.5.1 PROC X12 Output When Potential Outliers Are Identified

Automatic Outlier Identification			
The X12 Procedure			
Critical Values to use in Outlier Detection For Variable sales			
Begin	SEP1978		
End	AUG1990		
Observations	144		
Method	Add One		
AO Critical Value	3.889838		
LS Critical Value	3.889838		
<p>NOTE: The following time series values might later be identified as outliers when data are added or revised. They were not identified as outliers in this run either because their test t-statistics were slightly below the critical value or because they were eliminated during the backward deletion step of the identification procedure, when a non-robust t-statistic is used.</p>			
Potential Outliers For Variable sales			
Type of Outlier	Date	t Value for AO	t Value for LS
AO	NOV1989	-3.48	-1.51

Output 37.5.1 *continued*

Exact ARMA Maximum Likelihood Estimation For Variable sales					
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t
Nonseasonal MA	1	0.40181	0.07887	5.09	<.0001
Seasonal MA	12	0.55695	0.07626	7.30	<.0001

In the next example, reducing the critical value to 3.3 causes the outlier identification routine to more aggressively identify outliers as shown in [Output 37.5.2](#). The first table shows the critical values. The second table shows that three additive outliers and a level shift have been included in the regression model. The third table shows how the inclusion of outliers in the model affects the ARMA parameters.

```
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  arima model=((0,1,1) (0,1,1));
  outlier cv=3.3;
  estimate;
  x11;
  output out=outlier(obs=50) a1 a8 a8ao a8ls b1 d10;
run;
proc print data=outlier(obs=50);
run;
```

Output 37.5.2 PROC X12 Output When Outliers Are Identified

Automatic Outlier Identification						
The X12 Procedure						
Critical Values to use in Outlier Detection						
For Variable sales						
	Begin	SEP1978				
	End	AUG1990				
	Observations	144				
	Method	Add One				
	AO Critical Value	3.3				
	LS Critical Value	3.3				
Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Automatically Identified	AO JAN1981	Est	0.09590	0.02168	4.42	<.0001
	LS FEB1983	Est	-0.09673	0.02488	-3.89	0.0002
	AO OCT1983	Est	-0.08032	0.02146	-3.74	0.0003
	AO NOV1989	Est	-0.10323	0.02480	-4.16	<.0001
Exact ARMA Maximum Likelihood Estimation						
For Variable sales						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal MA	1	0.33205	0.08239	4.03	<.0001	
Seasonal MA	12	0.49647	0.07676	6.47	<.0001	

The first 50 observations of the A1, A8, A8AO, A8LS, B1, and D10 series are displayed in [Output 37.5.3](#). You can confirm the following relationships from the data:

$$A8 = A8AO \times A8LS$$

$$B1 = A1/A8$$

The seasonal factors are stored in the variable sales_D10.

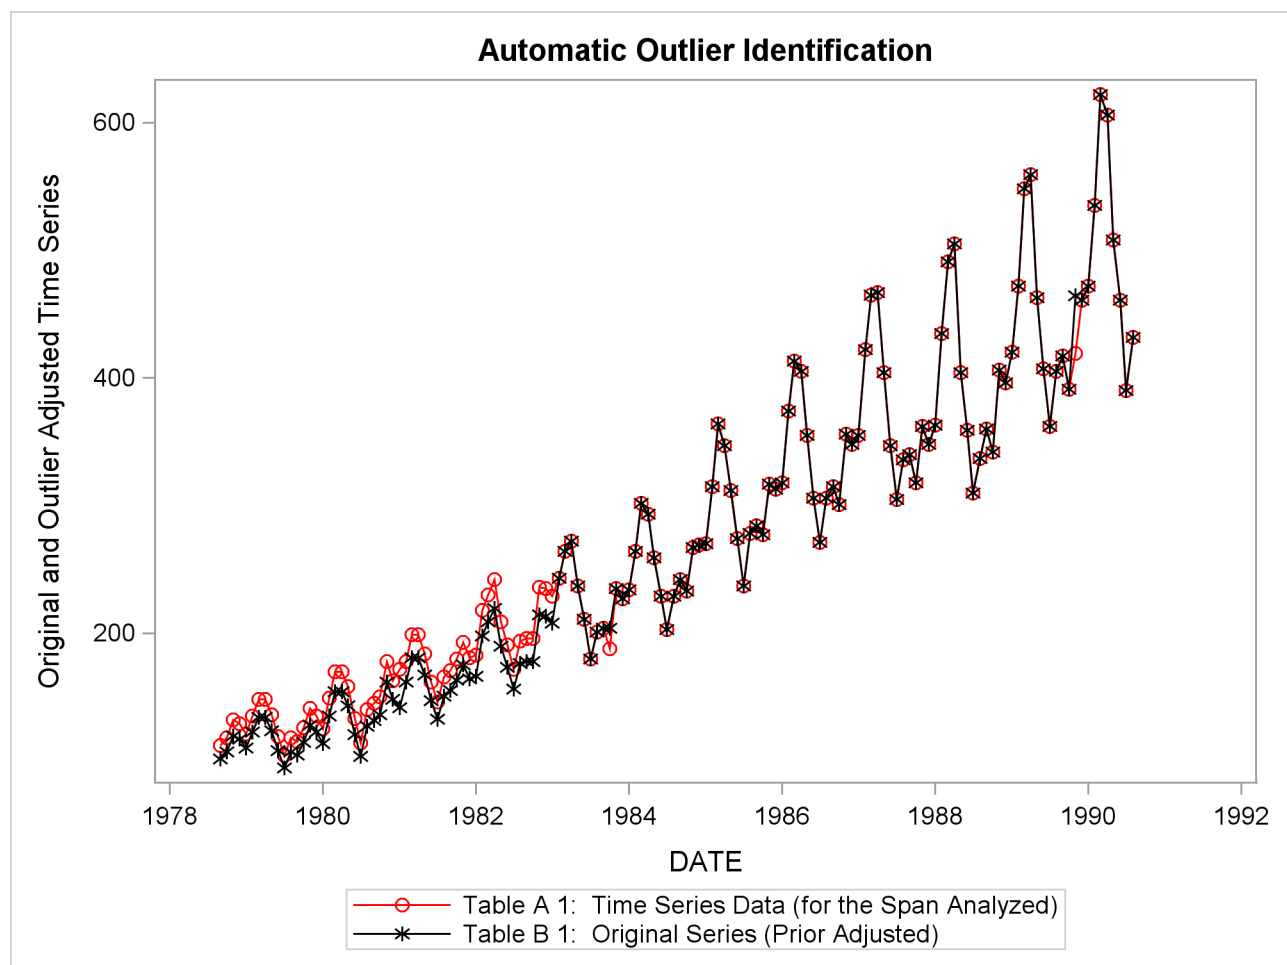
Output 37.5.3 PROC X12 Output Series Related to Outlier Detection

Automatic Outlier Identification							
Obs	DATE	sales_A1	sales_A8	sales_A8AO	sales_A8LS	sales_B1	sales_D10
1	SEP78	112	1.10156	1.00000	1.10156	101.674	0.90496
2	OCT78	118	1.10156	1.00000	1.10156	107.121	0.94487
3	NOV78	132	1.10156	1.00000	1.10156	119.830	1.04711
4	DEC78	129	1.10156	1.00000	1.10156	117.107	1.00119
5	JAN79	121	1.10156	1.00000	1.10156	109.844	0.94833
6	FEB79	135	1.10156	1.00000	1.10156	122.553	1.06817
7	MAR79	148	1.10156	1.00000	1.10156	134.355	1.18679
8	APR79	148	1.10156	1.00000	1.10156	134.355	1.17607
9	MAY79	136	1.10156	1.00000	1.10156	123.461	1.07565
10	JUN79	119	1.10156	1.00000	1.10156	108.029	0.91844
11	JUL79	104	1.10156	1.00000	1.10156	94.412	0.81206
12	AUG79	118	1.10156	1.00000	1.10156	107.121	0.91602
13	SEP79	115	1.10156	1.00000	1.10156	104.397	0.90865
14	OCT79	126	1.10156	1.00000	1.10156	114.383	0.94131
15	NOV79	141	1.10156	1.00000	1.10156	128.000	1.04496
16	DEC79	135	1.10156	1.00000	1.10156	122.553	0.99766
17	JAN80	125	1.10156	1.00000	1.10156	113.475	0.94942
18	FEB80	149	1.10156	1.00000	1.10156	135.263	1.07172
19	MAR80	170	1.10156	1.00000	1.10156	154.327	1.18663
20	APR80	170	1.10156	1.00000	1.10156	154.327	1.18105
21	MAY80	158	1.10156	1.00000	1.10156	143.433	1.07383
22	JUN80	133	1.10156	1.00000	1.10156	120.738	0.91930
23	JUL80	114	1.10156	1.00000	1.10156	103.490	0.81385
24	AUG80	140	1.10156	1.00000	1.10156	127.093	0.91466
25	SEP80	145	1.10156	1.00000	1.10156	131.632	0.91302
26	OCT80	150	1.10156	1.00000	1.10156	136.171	0.93086
27	NOV80	178	1.10156	1.00000	1.10156	161.589	1.03965
28	DEC80	163	1.10156	1.00000	1.10156	147.972	0.99440
29	JAN81	172	1.21243	1.10065	1.10156	141.864	0.95136
30	FEB81	178	1.10156	1.00000	1.10156	161.589	1.07981
31	MAR81	199	1.10156	1.00000	1.10156	180.653	1.18661
32	APR81	199	1.10156	1.00000	1.10156	180.653	1.19097
33	MAY81	184	1.10156	1.00000	1.10156	167.036	1.06905
34	JUN81	162	1.10156	1.00000	1.10156	147.064	0.92446
35	JUL81	146	1.10156	1.00000	1.10156	132.539	0.81517
36	AUG81	166	1.10156	1.00000	1.10156	150.695	0.91148
37	SEP81	171	1.10156	1.00000	1.10156	155.234	0.91352
38	OCT81	180	1.10156	1.00000	1.10156	163.405	0.91632
39	NOV81	193	1.10156	1.00000	1.10156	175.206	1.03194
40	DEC81	181	1.10156	1.00000	1.10156	164.312	0.98879
41	JAN82	183	1.10156	1.00000	1.10156	166.128	0.95699
42	FEB82	218	1.10156	1.00000	1.10156	197.901	1.09125
43	MAR82	230	1.10156	1.00000	1.10156	208.795	1.19059
44	APR82	242	1.10156	1.00000	1.10156	219.688	1.20448
45	MAY82	209	1.10156	1.00000	1.10156	189.731	1.06355
46	JUN82	191	1.10156	1.00000	1.10156	173.391	0.92897
47	JUL82	172	1.10156	1.00000	1.10156	156.142	0.81476
48	AUG82	194	1.10156	1.00000	1.10156	176.114	0.90667
49	SEP82	196	1.10156	1.00000	1.10156	177.930	0.91200
50	OCT82	196	1.10156	1.00000	1.10156	177.930	0.89970

From the two previous examples, you can examine how outlier detection affects the seasonally adjusted series. [Output 37.5.4](#) shows a plot of A1 versus B1 in the series where outliers are detected. B1 has been adjusted for the additive outliers and the level shift.

```
proc sgplot data=outlier;
  series x=date y=sales_A1 / name='A1' markers
        markerattrs=(color=red symbol='circle')
        lineattrs=(color=red);
  series x=date y=sales_B1 / name='B1' markers
        markerattrs=(color=black symbol='asterisk')
        lineattrs=(color=black);
  yaxis label='Original and Outlier Adjusted Time Series';
run;
```

Output 37.5.4 Original Series and Outlier Adjusted Series

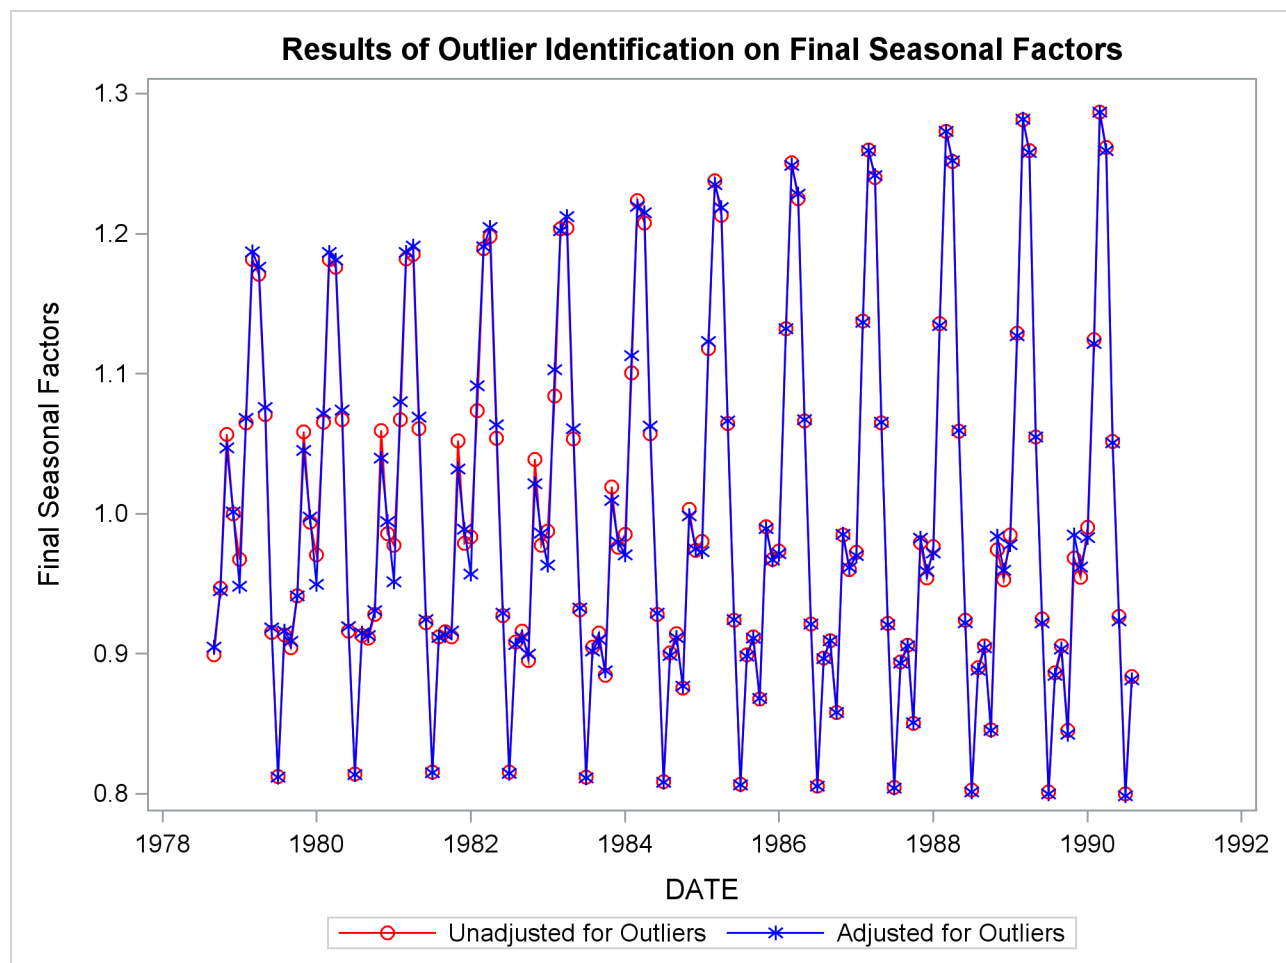


Output 37.5.5 compares the seasonal factors (table D10) of the series unadjusted for outliers to the series adjusted for outliers. The seasonal factors are based on the B1 series.

```
data both;
  merge nooutlier(rename=(sales_D10=unadj_D10)) outlier;
run;

title 'Results of Outlier Identification on Final Seasonal Factors';
proc sgplot data=both;
  series x=date y=unadj_D10 / name='unadjusted' markers
    markerattrs=(color=red symbol='circle')
    lineattrs=(color=red)
    legendlabel='Unadjusted for Outliers';
  series x=date y=sales_D10 / name='adjusted' markers
    markerattrs=(color=blue symbol='asterisk')
    lineattrs=(color=blue)
    legendlabel='Adjusted for Outliers';
  yaxis label='Final Seasonal Factors';
run;
```

Output 37.5.5 Seasonal Factors Based on Original and Outlier Adjusted Series



Example 37.6: User-Defined Regressors

This example demonstrates the use of the `USERVAR=` option in the `REGRESSION` statement to include user-defined regressors in the `regARIMA` model. The user-defined regressors must be defined as nonmissing values for the span of the series being modeled plus any forecast values. Suppose you have the data set `SALESdata` with 132 monthly observations beginning in January of 1949.

```
title 'Data Set to be Seasonally Adjusted';
data salesdata;
    set sashelp.air(obs=132);
run;
```

Since the `regARIMA` model forecasts one year ahead, the user-defined regressor must be defined for 144 observations that start in January of 1949. You can construct a simple length-of-month regressor by using the following `DATA` step:

```
title 'User-defined Regressor for Data to be Seasonally Adjusted';
data regressors(keep=date LengthOfMonth);
    set sashelp.air;
    LengthOfMonth = INTNX('MONTH',date,1) - date;
run;
```

In this example, the two data sets are merged in order to use them as input to `PROC X12`. You can also use the `AUXDATA=` data set to input user-defined regressors. See [Example 37.10](#) for more information. The `BY` statement is used to align the regressors with the time series by the time ID variable `DATE`.

```
title 'Data Set Containing Series and Regressors';
data datain;
    merge regressors salesdata;
    by date;
run;
proc print data=datain(firstobs=121);
run;
```

The last 24 observations of the input data set are displayed in [Output 37.6.1](#). Note that the regressor variable is defined for one year (12 observations) beyond the span of the time series to be seasonally adjusted.

Output 37.6.1 PROC X12 Input Data Set with User-Defined Regressor

Data Set Containing Series and Regressors				
Obs	DATE	Length OfMonth	AIR	
121	JAN59	31	360	
122	FEB59	28	342	
123	MAR59	31	406	
124	APR59	30	396	
125	MAY59	31	420	
126	JUN59	30	472	
127	JUL59	31	548	
128	AUG59	31	559	
129	SEP59	30	463	
130	OCT59	31	407	
131	NOV59	30	362	
132	DEC59	31	405	
133	JAN60	31	.	
134	FEB60	29	.	
135	MAR60	31	.	
136	APR60	30	.	
137	MAY60	31	.	
138	JUN60	30	.	
139	JUL60	31	.	
140	AUG60	31	.	
141	SEP60	30	.	
142	OCT60	31	.	
143	NOV60	30	.	
144	DEC60	31	.	

The DATAIN data set is now ready to be used as input to PROC X12. The DATE= variable and the user-defined regressors are automatically excluded from the variables to be seasonally adjusted.

```

title 'regARIMA Model with User-defined Regressor';
proc x12 data=datain date=DATE interval=MONTH;
  transform function=log;
  regression uservar=LengthOfMonth;
  automdl;
  x11;
run;

```

The parameter estimates for the regARIMA model are shown in [Output 37.6.2](#)

Output 37.6.2 PROC X12 Output for User-Defined Regression Parameter

regARIMA Model with User-defined Regressor						
The X12 Procedure						
Regression Model Parameter Estimates For Variable AIR						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	LengthOfMonth	Est	0.04683	0.01834	2.55	0.0119
Exact ARMA Maximum Likelihood Estimation For Variable AIR						
Parameter	Lag		Estimate	Standard Error	t Value	Pr > t
Nonseasonal MA	1		0.33678	0.08506	3.96	0.0001
Seasonal MA	12		0.54078	0.07726	7.00	<.0001

Example 37.7: MDLINFOIN= and MDLINFOOUT= Data Sets

This example illustrates the use of MDLINFOIN= and MDLINFOOUT= data sets. Using the data set shown, PROC X12 step identifies the model with outliers as displayed in [Output 37.7.1](#). [Output 37.7.2](#) shows the data set that represents the chosen model.

```
data b1;
  input y @@;
  datalines;
112 118 132 129
121 135 148 148
136 119 104 118
115 126 141 135
125 149 270 170
158 133 114 140
;

title 'Model Identification Output to MDLINFOOUT= Data Set';
proc x12 data=b1 start='1980q1' interval=qtr MdlInfoOut=mdl;
  automdl;
  outlier;
run ;

proc print data=mdl;
run;
```

Output 37.7.1 Displayed Model Identification with Outliers

Model Identification Output to MDLINFOOUT= Data Set						
The X12 Procedure						
Critical Values to use in Outlier Detection						
For Variable y						
Begin	1980Q1					
End	1985Q4					
Observations	24					
Method	Add One					
AO Critical Value	3.419415					
LS Critical Value	3.419415					
Final Automatic Model Selection						
For Variable y						
Source of Model	Estimated Model					
Automatic Model Choice	(2, 1, 0) (0, 0, 0)					
Regression Model Parameter Estimates						
For Variable y						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Automatically Identified	AO 1984Q3	Est	102.36589	5.96584	17.16	<.0001
Exact ARMA Maximum Likelihood Estimation						
For Variable y						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal AR	1	0.40892	0.20213	2.02	0.0554	
	2	-0.53710	0.20975	-2.56	0.0178	

Output 37.7.2 PROC X12 MDLINFOOUT= Data Set Model with Outlier Detection

Model Identification Output to MDLINFOOUT= Data Set											
Obs		Model		Model		Component		Parameter		Statistic	
		Description		Description		Description		Description		Description	
		Model		Model		Component		Parameter		Statistic	
		Model		Model		Component		Parameter		Statistic	
1	y	REG	EVENT	SCALE	AO	AO01JUL1984D
2	y	ARIMA	FORECAST	NONSEASONAL	DIF	y
3	y	ARIMA	FORECAST	NONSEASONAL	AR	y
4	y	ARIMA	FORECAST	NONSEASONAL	AR	y
Obs		Forecast		Statistic		Statistic		Statistic		Statistic	
		Forecast		Statistic		Statistic		Statistic		Statistic	
		Forecast		Statistic		Statistic		Statistic		Statistic	
		Forecast		Statistic		Statistic		Statistic		Statistic	
1	.	.	0	102.366	5.96584	17.1587	0.000000
2	.	1
3	1	1	0	0.409	0.20213	2.0231	0.055385
4	1	2	0	-0.537	0.20975	-2.5606	0.017830

Suppose that after examining the output from the preceding example, you decide that an Easter regressor should be added to the model. The following statements create a data set with the model identified above and adds a U.S. Census Bureau Predefined Easter(25) regressor. The new model data set to be used as input in the MDLINFOIN= option is displayed in the data set shown in [Output 37.7.3](#).

```
data pluseaster;
  _NAME_ = 'y';
  _MODELTYPE_ = 'REG';
  _MODELPART_ = 'PREDEFINED';
  _COMPONENT_ = 'SCALE';
  _PARMTYPE_ = 'EASTER';
  _DSVAR_ = 'EASTER';
  _VALUE_ = 25;
run;

data mdlpluseaster;
  set mdl;
run;

proc append base=mdlpluseaster data=pluseaster force;
run;

proc print data=mdlpluseaster;
run;
```

Output 37.7.3 MDLINFOIN= Data Set Model with Easter(25) Regression Added

Model Identification Output to MDLINFOOUT= Data Set												
Objects		M		M		C		P				
		O		O		O		A				
		D		D		M		R				
		E		E		P		M		D		
		L		L		O		T		S		
	N	T		P		N		Y		V		
	A	Y		A		E		P		A		
OM	P		R		N		E		R			
bs	E		T		T							
1	y	REG		EVENT		SCALE		AO		AO01JUL1984D		
2	y	ARIMA		FORECAST		NONSEASONAL		DIF		Y		
3	y	ARIMA		FORECAST		NONSEASONAL		AR		Y		
4	y	ARIMA		FORECAST		NONSEASONAL		AR		Y		
5	y	REG		PREDEFINED		SCALE		EASTER		EASTER		
Objects		F		S		S		T		P		S
		A		H		O		V		A		T
		C		I		E		A		L		A
		L		E		E		L		T		O
		U		F		S		U		U		R
		O		T		T		E		E		E
		R		G		T						L
bs												
1	0	102.366	5.96584	17.1587	0.000000	.		
2	.	.	1		
3	.	1	1	.	0	0.409	0.20213	2.0231	0.055385	.		
4	.	1	2	.	0	-0.537	0.20975	-2.5606	0.017830	.		
5	25		

The following statements estimate the regression and ARIMA parameters by using the model described in the new data set mdlpluseaster. The results of estimating the new model are shown in [Output 37.7.4](#).

```
proc x12 data=b1 start='1980q1' interval=qtr
  MdlInfoIn=mdlpluseaster MdlInfoOut=mdl2;
  estimate;
run;
```

Output 37.7.4 Estimate Model with Added Easter(25) Regression

Model Identification Output to MDLINFOOUT= Data Set						
The X12 Procedure						
Regression Model Parameter Estimates For Variable y						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Easter	Easter[25]	Est	6.15738	4.89162	1.26	0.2219
User Defined	AO01JUL1984D	Est	105.29433	6.15636	17.10	<.0001
Exact ARMA Maximum Likelihood Estimation For Variable y						
Parameter	Lag		Estimate	Standard Error	t Value	Pr > t
Nonseasonal AR	1		0.44376	0.20739	2.14	0.0443
	2		-0.54050	0.21656	-2.50	0.0210

The new model estimation results are displayed in the data set mdl2 shown in [Output 37.7.5](#).

```
proc print data=mdl2;  
run;
```

Output 37.7.5 MDLINFOOUT= Data Set, Estimation of Model with Easter(25) Regression Added

Model Identification Output to MDLINFOOUT= Data Set											
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs	1	2	3	4	5	6	7	8	9	10	11
Obs											

Example 37.8: Setting Regression Parameters

This example illustrates the use of fixed regression parameters in PROC X12. Suppose that you have the same data set as in the section “Basic Seasonal Adjustment” on page 2470. You can specify the following statements to use TRAMO to automatically identify a model that includes a U.S. Census Bureau Easter(25) regressor:

```
title 'Estimate Easter(25) Parameter';
proc x12 data=sales date=date MdlInfoOut=mdlout1;
  var sales;
  regression predefined=easter(25);
  automdl;
run ;
```

The displayed results are shown in [Output 37.8.1](#).

Output 37.8.1 Automatic Model ID with Easter(25) Regression

Estimate Easter(25) Parameter						
The X12 Procedure						
Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Easter	Easter[25]	Est	-5.09298	3.50786	-1.45	0.1489
Exact ARMA Maximum Likelihood Estimation						
For Variable sales						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal AR	1	0.62148	0.09279	6.70	<.0001	
	2	0.23354	0.10385	2.25	0.0262	
	3	-0.07191	0.09055	-0.79	0.4285	
Nonseasonal MA	1	0.97377	0.03771	25.82	<.0001	
Seasonal MA	12	0.10558	0.10205	1.03	0.3028	

The MDLINFOOUT= data set, mdlout1, that contains the model and parameter estimates is shown in [Output 37.8.2](#).

```
proc print data=mdlout1;
run;
```

Output 37.8.2 MDLINFOOUT= Data Set, Estimation of Automatic Model ID with Easter(25) Regression

Estimate Easter(25) Parameter									
		M		M		C		P	
		O		O		O		A	
		D		D		M		R	
		E		E		P		M	
		L		L		O		T	
		N		P		N		Y	
		A		A		E		V	
		M		R		N		P	
		E		T		T		E	
		—		—		—		—	
1	sales	REG	PREDEFINED	SCALE	EASTER	EASTER	25		
2	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.		
3	sales	ARIMA	FORECAST	SEASONAL	DIF	sales	.		
4	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.		
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.		
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.		
7	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales	.		
8	sales	ARIMA	FORECAST	SEASONAL	MA	sales	.		
		F		S		T		P	
		A		T		V		V	
		C		D		A		A	
		T		E		L		T	
		O		S		R		U	
		O		S		R		U	
		R		T		E		E	
		—		—		—		—	
1	.	.	0	-5.09298	3.50786	-1.4519	0.14894	.	
2	.	1	
3	.	1	
4	1	1	0	0.62148	0.09279	6.6980	0.00000	.	
5	1	2	0	0.23354	0.10385	2.2488	0.02621	.	
6	1	3	0	-0.07191	0.09055	-0.7942	0.42851	.	
7	1	1	0	0.97377	0.03771	25.8240	0.00000	.	
8	2	1	0	0.10558	0.10205	1.0346	0.30277	.	

To fix the Easter(25) parameter while adding a regressor that is weighted according to the number of Saturdays in a month, either use the REGRESSION and EVENT statements or create a MDLINFOIN= data set. The following statements show the method for using the REGRESSION statement to fix the EASTER parameter and the EVENT statement to add the SATURDAY regressor. The output is shown in [Output 37.8.3](#).

```

title 'Use SAS Statements to Alter Model';
proc x12 data=sales date=date MdlInfoOut=mdlout2grm;
  var sales;
  regression predefined=easter(25) / b=-5.029298 F;
  event Saturday;
  automdl;
run ;

```

Output 37.8.3 Automatic Model ID with Fixed Easter(25) and Saturday Regression

Use SAS Statements to Alter Model						
The X12 Procedure						
Regression Model Parameter Estimates For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	Saturday	Est	3.23225	1.16701	2.77	0.0064
Easter	Easter[25]	Fixed	-5.02930	.	.	.
Exact ARMA Maximum Likelihood Estimation For Variable sales						
Parameter	Lag		Estimate	Standard Error	t Value	Pr > t
Nonseasonal AR	1		-0.32506	0.08256	-3.94	0.0001

To fix the EASTER regressor and add the new SATURDAY regressor by using a DATA step, you can create the data set mdlin2 as shown. The data set mdlin2 is displayed in [Output 37.8.4](#).

```

title 'Use a SAS DATA Step to Create a MdlInfoIn= Data Set';
data plusSaturday;
  _NAME_ = 'sales';
  _MODELTYPE_ = 'REG';
  _MODELPART_ = 'EVENT';
  _COMPONENT_ = 'SCALE';
  _PARMTYPE_ = 'USER';
  _DSVAR_ = 'SATURDAY';
run;

data mdlin2;
  set mdlout1;
  if ( _DSVAR_ = 'EASTER' ) then do;
    _NOEST_ = 1;
    _EST_ = -5.029298;
  end;
run;

proc append base=mdlinfo data=plusSaturday force;
run;

proc print data=mdlinfo;
run;

```

Output 37.8.4 MDLINFOIN= Data Set, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model

Use a SAS DATA Step to Create a MdlInfoIn= Data Set													
Obs	—		M		M		C		—				
	O		O		O		O		P				
	D		D		M		A		R		—		
	E		E		P		R		M		D		
	L		L		O		T		S				
	N		P		N		Y		V				
	A		A		E		P		A				
	M		R		N		E		R				
	E		T		T		E						
	—		—		—		—		—		—		
1	sales	REG	PREDEFINED	SCALE	EASTER	EASTER							
2	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales							
3	sales	ARIMA	FORECAST	SEASONAL	DIF	sales							
4	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales							
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales							
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales							
7	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales							
8	sales	ARIMA	FORECAST	SEASONAL	MA	sales							
9	sales	REG	EVENT	SCALE	USER	SATURDAY							
Obs	—		F		—		S		T		—		
	V		A		S		T		V		P		
	A		C		H		D		A		A		
	L		T		I		E		L		T		
	U		O		A		R		U		U		
	E		R		G		T		E		S		
	—		—		—		—		—		—		
	1	25	.	.	.	1	-5.02930	3.50786	-1.4519	0.14894	.		
	2	.	.	1		
	3	.	.	1		
4	.	1	1	.	0	0.62148	0.09279	6.6980	0.00000	.			
5	.	1	2	.	0	0.23354	0.10385	2.2488	0.02621	.			
6	.	1	3	.	0	-0.07191	0.09055	-0.7942	0.42851	.			
7	.	1	1	.	0	0.97377	0.03771	25.8240	0.00000	.			
8	.	2	1	.	0	0.10558	0.10205	1.0346	0.30277	.			
9			

The data set `mdlin2` can be used to replace the regression and model information contained in the `REGRESSION`, `EVENT`, and `AUTOMDL` statements. Note that the model specified in the `mdlin2` data set is the same model as the automatically identified model. The following example uses the `mdlin2` data set as input; the results are displayed in [Output 37.8.5](#).

```
title 'Use Updated Data Set to Alter Model';
proc x12 data=sales date=date MdlInfoIn=mdlin2 MdlInfoOut=mdlout2DS;
  var sales;
  estimate;
run ;
```

Output 37.8.5 Estimate MDLINFOIN= File for Model with Fixed Easter(25) and Saturday Regression, Previously Identified Model

Use Updated Data Set to Alter Model						
The X12 Procedure						
Regression Model Parameter Estimates For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined Easter	SATURDAY	Est	3.41762	1.07641	3.18	0.0019
	Easter[25]	Fixed	-5.02930	.	.	.
Exact ARMA Maximum Likelihood Estimation For Variable sales						
Parameter	Lag		Estimate	Standard Error	t Value	Pr > t
Nonseasonal AR	1		0.62225	0.09175	6.78	<.0001
	2		0.30429	0.10109	3.01	0.0031
	3		-0.14862	0.08859	-1.68	0.0958
Nonseasonal MA	1		0.97125	0.03798	25.57	<.0001
Seasonal MA	12		0.11691	0.10000	1.17	0.2445

The following statements specify almost the same information as contained in the data set `mdlin2`. The `ARIMA` statement specifies the lags of the model. However, the initial AR and MA parameter values are the default. When using the `mdlin2` data set as input, the initial values can be specified. The results are displayed in [Output 37.8.6](#).

```
title 'Use SAS Statements to Alter Model';
proc x12 data=sales date=date MdlInfoOut=mdlout3grm;
  var sales;
  regression predefined=easter(25) / b=-5.029298 F;
  event Saturday;
  arima model=((3 1 1)(0 1 1));
  estimate;
run ;

proc print data=mdlout3grm;
run;
```

Output 37.8.6 MDLINFOOUT= Statement, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model

Use SAS Statements to Alter Model										
O b j e c t s										
1	sales	REG	EVENT	SCALE	USER	Saturday				
2	sales	REG	PREDEFINED	SCALE	EASTER	EASTER				
3	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales				
4	sales	ARIMA	FORECAST	SEASONAL	DIF	sales				
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales				
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales				
7	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales				
8	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales				
9	sales	ARIMA	FORECAST	SEASONAL	MA	sales				
O b j e c t s										
1	.	.	.	0	3.41760	1.07640	3.1750	0.00187	.	.
2	25	.	.	1	-5.02930
3	.	.	1
4	.	.	1
5	.	1	1	0	0.62228	0.09175	6.7825	0.00000	.	.
6	.	1	2	0	0.30431	0.10109	3.0103	0.00314	.	.
7	.	1	3	0	-0.14864	0.08859	-1.6779	0.09579	.	.
8	.	1	1	0	0.97128	0.03796	25.5881	0.00000	.	.
9	.	2	1	0	0.11684	0.10000	1.1684	0.24481	.	.

The MDLINFOOUT= data set provides a method for comparing the results of the model identification. The data set mdlout3grm that results from using the MODEL= option in the ARIMA statement can be compared to the data set mdlout2DS that results from using the MDLINFOIN= data set with initial values for the AR and MA parameters. The mdlout2DS data set is shown in [Output 37.8.7](#), and the results of the comparison are shown in [Output 37.8.8](#). The slight difference in the estimated parameters can be attributed to the difference in the initial values for the AR and MA parameters.


```
proc print data=mdlout2DS;
run;
```

Output 37.8.7 MDLINFOOUT= Data Set, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model

Use SAS Statements to Alter Model												
		—		—		—		—				
		M		M		C		—				
		O		O		O		P				
		D		D		M		A				
		E		E		P		R		—		
—		L		L		O		M		D		
N		T		P		N		T		S		
A		Y		A		E		Y		V		
O	M	P		R		N		P		A		
b	E	E		T		T		E		R		
s	—	—		—		—		—		—		
1	sales	REG	EVENT		SCALE		USER		SATURDAY			
2	sales	REG	PREDEFINED		SCALE		EASTER		EASTER			
3	sales	ARIMA	FORECAST		NONSEASONAL		DIF		sales			
4	sales	ARIMA	FORECAST		SEASONAL		DIF		sales			
5	sales	ARIMA	FORECAST		NONSEASONAL		AR		sales			
6	sales	ARIMA	FORECAST		NONSEASONAL		AR		sales			
7	sales	ARIMA	FORECAST		NONSEASONAL		AR		sales			
8	sales	ARIMA	FORECAST		NONSEASONAL		MA		sales			
9	sales	ARIMA	FORECAST		SEASONAL		MA		sales			
		—		—		—		—		—		
		F		—		S		T		P		—
		V		S		T		V		V		S
		A		H		D		A		A		—
		L		I		E		L		L		L
O	U	O		S		R		U		U		O
b	E	R		T		R		E		E		B
s	—	—		—		—		—		—		—
1	0	3.41762	1.07641	3.1750	0.00187	.	.	.
2	25	.	.	.	1	-5.02930
3	.	.	1
4	.	.	1
5	.	1	1	.	0	0.62225	0.09175	6.7817	0.00000	.	.	.
6	.	1	2	.	0	0.30429	0.10109	3.0100	0.00314	.	.	.
7	.	1	3	.	0	-0.14862	0.08859	-1.6776	0.09584	.	.	.
8	.	1	1	.	0	0.97125	0.03798	25.5712	0.00000	.	.	.
9	.	2	1	.	0	0.11691	0.10000	1.1691	0.24451	.	.	.

```

title 'Compare Results of SAS Statement Input and MdlInfoIn= Input';
proc compare base= mdlout3grm compare=mdlout2DS;
var _EST_;
run ;

```

Output 37.8.8 Compare Parameter Estimates from Different MDLINFOOUT= Data Sets

Value Comparison Results for Variables					
Obs		Value of Parameter Estimate			
		Base	Compare	Diff.	% Diff
		EST	_EST_		
1		3.4176	3.4176	0.0000225	0.000658
5		0.6223	0.6222	-0.000033	-0.005237
6		0.3043	0.3043	-0.000021	-0.006977
7		-0.1486	-0.1486	0.0000235	-0.0158
8		0.9713	0.9713	-0.000024	-0.002452
9		0.1168	0.1169	0.0000759	0.0650

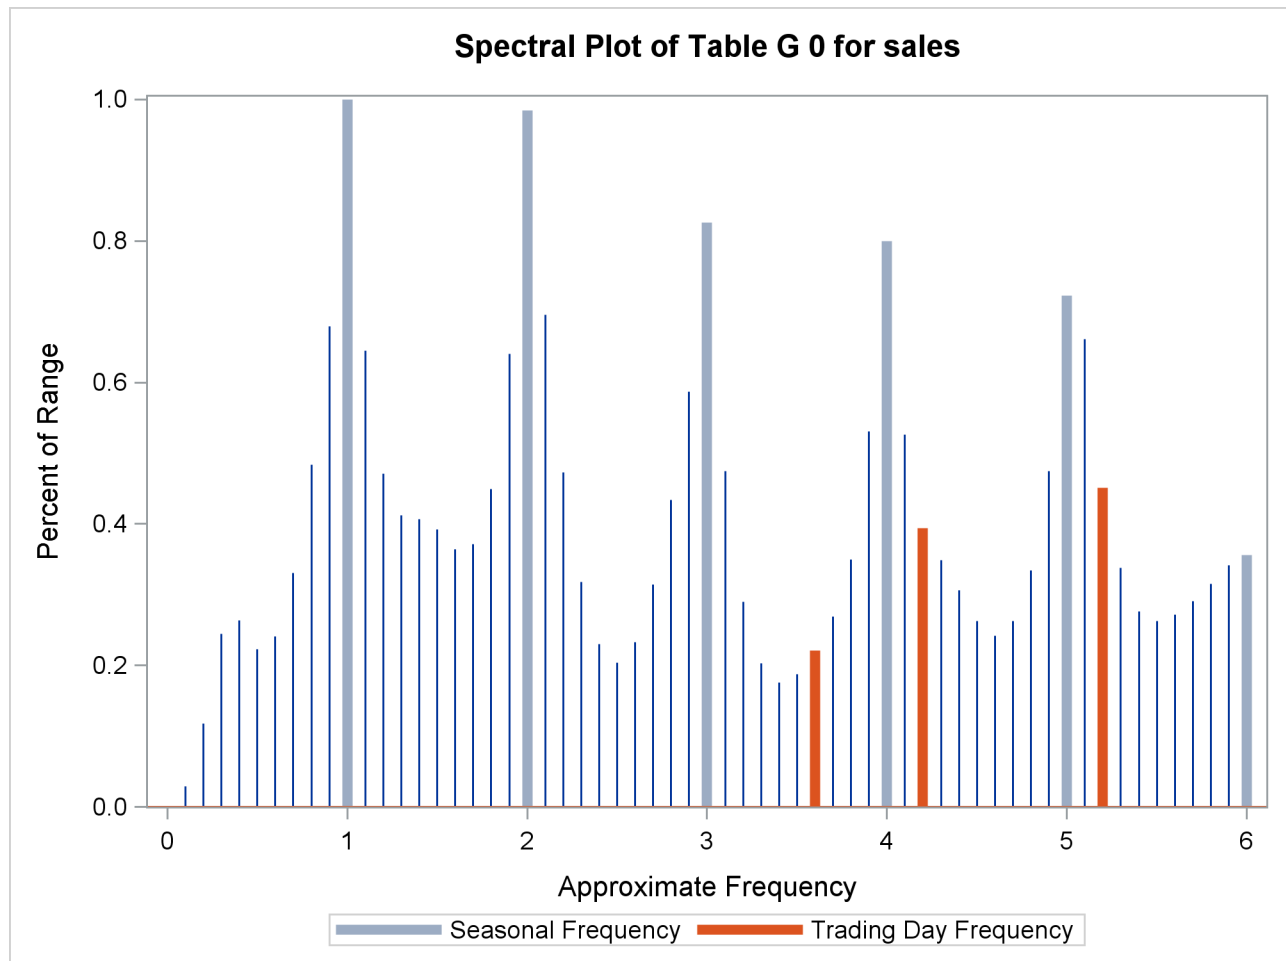
Example 37.9: Illustration of ODS Graphics

This example illustrates the use of ODS Graphics. Using the same data set as in the section “[Basic Seasonal Adjustment](#)” on page 2470 and the previous examples, a spectral plot of the original series is displayed in [Output 37.9.1](#).

The graphical displays are available when ODS Graphics is enabled. For specific information about the graphics available in the X12 procedure, see the section “[ODS Graphics](#)” on page 2523.

```
proc x12 data=sales date=date;
    var sales;
run;
```

Output 37.9.1 Spectral Plot for Original Data



Example 37.10: AUXDATA= Data Set

This example demonstrates the use of the AUXDATA= data set to input user-defined regressors for use in the regARIMA model. User-defined regressors are often economic indicators, but in this example a user-defined regressor is generated in the following statements:

```
data auxreg(keep=date lengthofmonth);
  set sales;
  lengthofmonth = (INTNX('MONTH',date,1) - date) - (365/12);
  format date monyy.;
run;
```

When you use the AUXDATA= data set, it is not necessary to merge the user-defined regressor data set with the DATA= data set. The following statements input the regressor lengthofmonth in the data set auxreg. The regressor lengthofmonth is specified in the REGRESSION statement, and the data set auxreg is specified in the AUXDATA= option in the PROC X12 statement.

```
title 'Align lengthofmonth Regressor from Auxreg to First Three Years';
ods select regParameterEstimates;
proc x12 data=sales(obs=36) date=date auxdata=auxreg;
  var sales;
  regression uservar=lengthofmonth;
  arima model=((0 1 1) (0 1 1));
  estimate;
run;

title 'Align lengthofmonth Regressor from Auxreg to Second Three Years';
ods select regParameterEstimates;
proc x12 data=sales(firstobs=37 obs=72) date=date auxdata=auxreg;
  var sales;
  regression uservar=lengthofmonth;
  arima model=((0 1 1) (0 1 1));
  estimate;
run;
```

Output 37.10.1 and Output 37.10.2 display the parameter estimates for the two series.

Output 37.10.1 Using Regressors in the AUXDATA= Data for the First Three Years of Series

Align lengthofmonth Regressor from Auxreg to First Three Years						
The X12 Procedure						
Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	2.98046	5.36251	0.56	0.5840

Output 37.10.2 Using Regressors in the AUXDATA= Data for the Second Three Years of Series

Align lengthofmonth Regressor from Auxreg to Second Three Years						
The X12 Procedure						
Regression Model Parameter Estimates For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	-0.51215	8.43145	-0.06	0.9521

The X12 procedure uses the date variable in the sales data set and the auxreg data set to align the user-defined regressors.

In the following example, the DATA= data set salesby contains BY groups. The X12 procedure aligns the regressor in the auxreg data set to each BY group in the salesby data set according to the variable date that is specified by the DATE= option in the PROC X12 statement. The variable date must be present in the auxreg data set to align the values.

```
data salesby;
  set sales(obs=72);
  if ( _n_ < 37 ) then by=1;
  else by=2;
run;
ods select regParameterEstimates;
title 'Align lengthofmonth Regressor from Auxreg to BY Groups';
proc x12 data=salesby date=date auxdata=auxreg;
  var sales;
  by by;
  regression uservar=lengthofmonth;
  arima model=((0 1 1) (0 1 1));
  estimate;
run;
```

The results in [Output 37.10.3](#) match the previous results in [Output 37.10.1](#) and [Output 37.10.2](#).

Output 37.10.3 Using Regressors in the AUXDATA= Data with BY Groups

Align lengthofmonth Regressor from Auxreg to BY Groups						
----- by=1 -----						
The X12 Procedure						
Regression Model Parameter Estimates For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	2.98046	5.36251	0.56	0.5840

Output 37.10.3 *continued*

Align lengthofmonth Regressor from Auxreg to BY Groups						
----- by=2 -----						
The X12 Procedure						
Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	-0.51215	8.43145	-0.06	0.9521

References

- Box, G. E. P., Jenkins, G. M., and Reinsel, G. C. (1994), *Time Series Analysis: Forecasting and Control*, Third Edition, Englewood Cliffs, NJ: Prentice Hall.
- Cholette, P. A. (1979), *A Comparison and Assessment of Various Adjustment Methods of Sub-annual Series to Yearly Benchmarks*, StatCan Staff Paper STC2119, Seasonal Adjustment and Time Series Staff, Statistics Canada, Ottawa.
- Dagum, E. B. (1983), *The X-11-ARIMA Seasonal Adjustment Method*, Technical Report 12-564E, Statistics Canada.
- Dagum, E. B. (1988), *The X-11-ARIMA/88 Seasonal Adjustment Method: Foundations and User's Manual*, Ottawa: Statistics Canada.
- Findley, D. F., Monsell, B. C., Bell, W. R., Otto, M. C., and Chen, B. C. (1998), "New Capabilities and Methods of the X-12-ARIMA Seasonal Adjustment Program," *Journal of Business and Economic Statistics*, 16, 127–176.
- Gomez, V. and Maravall, A. (1997a), *Guide for Using the Programs TRAMO and SEATS, Beta Version*, Banco de España.
- Gomez, V. and Maravall, A. (1997b), *Program TRAMO and SEATS: Instructions for the User, Beta Version*, Banco de España.
- Huot, G. (1975), *Quadratic Minimization Adjustment of Monthly or Quarterly Series to Annual Totals*, StatCan Staff Paper STC2104, Statistics Canada, Seasonal Adjustment and Time Series Staff, Ottawa.
- Ladiray, D. and Quenneville, B. (2001), *Seasonal Adjustment with the X-11 Method*, New York: Springer-Verlag.
- Ljung, G. M. (1993), "On Outlier Detection in Time Series," *Journal of the Royal Statistical Society, B*, 55, 559–567.

- Lothian, J. and Morry, M. (1978a), *A Set of Quality Control Statistics for the X-11-ARIMA Seasonal Adjustment Method*, StatCan Staff Paper STC1788E, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Lothian, J. and Morry, M. (1978b), *A Test for the Presence of Identifiable Seasonality When Using the X-11-ARIMA Program*, StatCan Staff Paper STC2118, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Shiskin, J., Young, A. H., and Musgrave, J. C. (1967), *The X-11 Variant of the Census Method II Seasonal Adjustment Program*, Technical Report 15, U.S. Department of Commerce, Bureau of the Census.
- U.S. Bureau of the Census (2009a), *X-12-ARIMA Quick Reference for UNIX/Linux, Version 0.3*, Washington, DC.
URL <http://www.census.gov/ts/x12a/v03/unix/qref03unix.pdf>
- U.S. Bureau of the Census (2009b), *X-12-ARIMA Quick Reference for Windows (PC), Version 0.3*, Washington, DC.
URL <http://www.census.gov/ts/x12a/v03/pc/qref03pc.pdf>
- U.S. Bureau of the Census (2009c), *X-12-ARIMA Reference Manual, Version 0.3*, Washington, DC.
URL <http://www.census.gov/ts/x12a/v03/x12adocV03.pdf>
- U.S. Bureau of the Census (2010), *X-12-ARIMA Seasonal Adjustment Program, Version 0.3*, Washington, DC.
URL <http://www.census.gov/srd/www/x12a/>

Part III

Data Access Engines

Chapter 38

The SASECRSP Interface Engine

Contents

Overview: SASECRSP Interface Engine	2578
Introduction	2578
Opening a Database	2578
Using Your Opened Database	2580
Getting Started: SASECRSP Interface Engine	2580
Structure of a SAS Data Set That Contains Time Series Data	2580
Reading CRSP Data Files	2581
Using the SAS DATA Step	2582
Using SAS Procedures	2582
Using CRSP Date Formats, Informats, and Functions	2582
Syntax: SASECRSP Interface Engine	2582
The LIBNAME <i>libref</i> SASECRSP Statement	2583
Details: SASECRSP Interface Engine	2591
Using the Inset Option	2591
The SAS Output Data Set	2594
Understanding CRSP Date Formats, Informats, and Functions	2595
Data Elements Reference: SASECRSP Interface Engine	2599
Available CRSP Stock Data Sets	2601
Available Compustat Data Sets	2606
Available CRSP Indices Data Sets	2639
Examples: SASECRSP Interface Engine	2651
Example 38.1: Specifying PERMNOs and RANGE on the LIBNAME Statement	2651
Example 38.2: Using the LIBNAME Statement to Access All Keys	2653
Example 38.3: Accessing One PERMNO Using No RANGE	2655
Example 38.4: Specifying Keys Using the INSET= Option	2656
Example 38.5: Specifying Ranges for Individual Keys with the INSET= Option	2660
Example 38.6: Converting Dates By Using the CRSP Date Functions	2661
Example 38.7: Comparing Different Ways of Accessing CCM Data	2663
Example 38.8: Comparing PERMNO and GVKEY Access of CRSP Stock Data	2666
Example 38.9: Using Fiscal Date Range Restriction	2668
Example 38.10: Using Different Types of Range Restrictions in the INSET	2670
Example 38.11: Using INSET Ranges with the LIBNAME RANGE Option	2672
References	2674

Overview: SASECRSP Interface Engine

Introduction

The SASECRSP interface engine enables SAS users to access and process time series, events, portfolios, and group data that reside in CRSPAccess databases. It also provides a seamless interface between CRSP, COMPUSTAT, and SAS data processing. Currently, SASECRSP supports access of CRSP Stock databases, CRSP Indices databases and CRSP/Compustat Merged databases.

Opening a Database

The SASECRSP engine uses the LIBNAME statement to enable you to specify which CRSPAccess database you would like to access and how you would like to perform selection on that database.

To specify the database, you supply the combination of a physical path to indicate the location of the CRSPAccess data files and a set identifier (SETID) to identify the database desired from those available at the physical path. Specify one SETID from [Table 38.1](#). Note that the CRSP environment variable CRSPDB_SASCAL must be defined before the SASECRSP engine can access the CRSPAccess database calendars that provide the time ID variables and enable the LIBNAME to successfully assign. If your database setid is 250, use the SASEXCCM interface to access your data. For more information on the SASEXCCM interface see the chapter on SASEXCCM in *SAS/ETS User's Guide*.

Table 38.1 CRSPAccess Databases SETIDs

SETID	Data Set
10	CRSP Stock, daily data
20	CRSP Stock, monthly data
200	CRSP/Compustat Merged (CCM) data
400	CRSP Indices data, monthly index groups
420	CRSP Indices data, monthly index series
440	CRSP Indices data, daily index groups
460	CRSP Indices data, daily index series

Usually you do not want to open the entire CRSPAccess database, so for efficiency purposes and ease of use, SASECRSP supports a variety of options for performing data selection on your CRSPAccess database with the LIBNAME statement. These options enable you to open and retrieve data for only the portion of the database you desire. The availability of some of these options depends on the type of database being opened.

CRSP Stock Databases

When accessing the CRSP Stock databases, you can select which securities you want to access by specifying their *PERMNO*s with the PERMNO= option. *PERMNO*TM is CRSP's unique permanent issue identification

number and the primary key for their stock databases. Alternatively, a number of secondary keys can also be used to select stock data. For example, you could use the `PERMCO=` option to read selected securities based on CRSP's unique permanent company identification number, *PERMCO*TM. A full list of possible keys for accessing CRSP Stock data is shown in [Table 38.2](#).

Table 38.2 Keys for Accessing CRSP Stock Data

Key	Access By
PERMNO	CRSP's unique permanent issue identification number This is the primary key for CRSP Stock databases.
PERMCO	CRSP's unique permanent company identification number
CUSIP	CUSIP number
HCUSIP	historical CUSIP
SICCD	standard industrial classification (SIC) code
TICKER	TICKER symbol (for active companies only)

CRSP/Compustat Merged Databases

Experimental support for Xpressfeed CCM data access is provided by the new SASEXCCM engine. SASEXCCM provides data item handling access methods using CRSPAccess 3.14. For a detailed description of this new ETS interface engine, see the chapter on SASEXCCM in *SAS/ETS User's Guide*. A description of the legacy CCM data access methods using the SASECRSP engine follows.

When accessing Compustat data via the CCM database using SASECRSP, you can select which companies you want to access by specifying their *GVKEY*s. *GVKEY*TM is Compustat's unique identifier and primary key. You can specify a *GVKEY* to include with the `GVKEY=` option. Two secondary keys, *PERMNO* and *PERMCO*, are also supported for access via their respective `PERMNO=` and `PERMCO=` options. A full list of possible keys for accessing CCM data is shown in [Table 38.3](#).

Table 38.3 Keys for Accessing CCM Data

Key	Access By
GVKEY	Compustat's unique identifier and primary key for CCM database
PERMNO	CRSP's unique permanent issue identification number
PERMCO	CRSP's unique permanent company identification number

CRSP Indices Databases

When accessing CRSP Indices data, you can select which indices you want to access by specifying their *INDNO*s. *INDNO*TM is the primary key for CRSP Indices databases. You can specify which *INDNO* to use with the `INDNO=` option. No secondary key access is supported for CRSP Indices. A full list of possible keys for accessing CRSP Indices data is shown in [Table 38.4](#).

Table 38.4 Keys for Accessing Indices Data

Key	Access By
INDNO	CRSP's unique permanent index identifier number. This is the primary key for CRSP Indices databases and enables you to specify which index series or groups you want to select.

Regardless of the database you are accessing, you can always use the INSET= and RANGE= options for subsetting and selection. The RANGE= option subsets the data timewise. The INSET= option enables you to specify which issues or companies you want to select from the CRSP database by using an input SAS data set.

Using Your Opened Database

Once the LIBNAME is assigned, the database is opened. You can retrieve data for any member you want in the opened database. For a complete description of available data sets and their fields, see the section “Data Elements Reference: SASECRSP Interface Engine” on page 2599. You can also use the SAS DATA Step to perform further subsetting and to store the resulting time series in a SAS data set. Since CRSP and SAS use three different date representations, you can make use of the engine-provided CRSP date formats, informats, and functions for your data processing needs. See the section “Understanding CRSP Date Formats, Informats, and Functions” on page 2595, as well as Example 38.6 later in this chapter for more information about dates with SASECRSP.

SASECRSP for SAS 9.2 supports Linux, Solaris (SUNOS5.9), and 32-bit Windows. SASECRSP for SAS 9.3 supports Linux, Solaris (SUNOS5.10), and 32-bit Windows.

Getting Started: SASECRSP Interface Engine

Structure of a SAS Data Set That Contains Time Series Data

SAS requires time series data to be in a specific form that is recognizable by the SAS System. This form is a two-dimensional array, called a SAS data set, whose columns correspond to series variables and whose rows correspond to measurements of these variables at certain points in time. The time at which observations are recorded can be included in the data set as a time ID variable. Note that CRSP sets the date to the end of a time period as opposed to the beginning, and SASECRSP follows this convention. For example, the time ID variable for any particular month in a monthly time series occurs on the last trading day of that month.

The SASECRSP engine provides several different time ID variables depending on the data member opened. For most members, a time ID variable called CALDT is provided. CALDT provides a day-based calendar

date and is in a CRSP date format. This means dates are stored as an offset in an array of trading days or a trading day calendar. There are five different CRSP trading day calendars and the one used depends on the frequency of the data member. For example, the CRSP date for a daily time series refers to a daily trading day calendar.

The five trading day calendars are: annual, quarterly, monthly, weekly and daily. For your convenience, the format and informat for this field is set so the CRSP date is automatically converted to an Integer date representation when viewed or printed. For data programming, the SASECRSP engine provides 23 different user functions for date conversions between CRSP, SAS, and integer dates.

The CCM database contains members whose dates are based on the fiscal calendar of the corresponding company, so a comprehensive set of time ID variables are provided. CRSPDT, RCALDT and FISCALDT provide day-based dates, each with its own format.

CRSPDT This time ID variable provides a date in CRSP date format similar to CALDT. CRSPDT differs only in that its format and informat are not set for automatic conversion to integer dates because this is already provided by FISCALDT and RCALDT. For fiscal members, CRSPDT is one based on the fiscal calendar of the company.

FISCALDT This time ID variable provides the same date CRSPDT does, but in integer format. It is the result of performing a CRSP-to-Integer date conversion on CRSPDT. Since the date CRSPDT holds is fiscal, FISCALDT is also fiscal.

RCALDT This time ID variable is also an integer date, just like FISCALDT, but it has been shifted so the date is on calendar time as opposed to being fiscal.

For example, Microsoft's fiscal year ends in June, so if you look at its annual period descriptor for the 2002 fiscal year, its time ID variables are 78 for CRSPDT, 20021231 for its FISCALDT, and 20020628 for RCALDT. In summary, a total of three time ID variables are provided for fiscal time series members. One is in CRSP date format, and the other two are in integer format with the only difference between the two integer formats being that one of them is based on the fiscal calendar of the company while the other is not.

For more information about how CALDT, CRSPDT, and date conversions are handled, see the section "[Understanding CRSP Date Formats, Informats, and Functions](#)" on page 2595.

The CCM database also contains fiscal array members, which are all the segment data members. They are unlike the fiscal time series in that they are not associated with a calendar and also have their time ID variables embedded in the data as a data field. Generally both fiscal and calendar time ID variables are embedded. However, segment members *segsr*, *segcur*, and *segitm* have only one fiscal time ID variable embedded. For your convenience, SASECRSP calculates and provides CALYR, the calendar version of the embedded fiscal time ID variable for these three segment members. Note that due to limitations of the data, all segment member time ID variables are year-based.

Reading CRSP Data Files

The SASECRSP engine supports reading time series, events, portfolios and group data from CRSPAccess databases. The SETID you specify determines the database that is read. See [Table 38.1](#) for a list of possible

databases. The CRSP environment variable CRSPDB_SASCAL must be defined before the SASECRSP engine can access the CRSPAccess database calendars that provide the time ID variables and enable the LIBNAME to successfully assign.

Using the SAS DATA Step

If desired, you can store the selected series in a SAS data set by using the SAS DATA step. You can also perform other operations on your data inside the DATA step. Once the data is in a SAS data set you can use it as you would any other SAS data set.

Using SAS Procedures

You can print the output SAS data set by using the PRINT procedure, and you can report information concerning the contents of your data set by using the CONTENTS procedure.

You can also create a view of the CRSPAccess database by using the SQL procedure in conjunction with a SASECRSP *libref*. See [Example 38.11](#) later in this chapter for an example with PROC SQL.

Viewtable enables you to view your data by double-clicking on a SASECRSP *libref* in the LIBNAME window of the SAS Display Manager.

Using CRSP Date Formats, Informats, and Functions

Historically, CRSP has used two different methods to represent dates, and SAS has used a third. The SASECRSP engine provides 23 functions, 15 informats, and 10 formats to enable you to easily translate the dates from one internal representation to another. See the section “[Understanding CRSP Date Formats, Informats, and Functions](#)” on page 2595 for details.

Syntax: SASECRSP Interface Engine

The SASECRSP engine uses standard engine syntax. Options used by SASECRSP are summarized in [Table 38.5](#).

Table 38.5 Summary of LIBNAME libref

Option	Description
SETID=	specifies which CRSP database subset to open This option is required. See Table 38.1 for complete list of supported SETIDs.
PERMNO=	specifies a CRSP PERMNO to be selected for access
PERMCO=	specifies a CRSP PERMCO to be selected for access
CUSIP=	specifies a current CUSIP to be selected for access
HCUSIP=	specifies a historic CUSIP to be selected for access
TICKER=	specifies a TICKER to be selected for access (for active companies only)
SICCD=	specifies a SIC Code to be selected for access
GVKEY=	specifies a Compustat GVKEY to be selected for access
INDNO=	specifies a CRSP INDNO to be selected for access
RANGE=	specifies the range of data to keep in format 'YYYYMMDD-YYYYMMDD'
INSET=	uses a SAS data set named <i>setname</i> as input for issues
CRSPLINKPATH=	specifies location of the CRSP link history. This option is required for accessing CRSP data with Compustat's GVKEY.

The LIBNAME libref SASECRSP Statement

LIBNAME libref SASECRSP 'physical name' options ;

The physical name required by the LIBNAME statement should point to the directory of CRSPAccess data files where the CRSP database you want to open is located. Note that the physical name **must** end in a slash for UNIX environments and a backslash for Windows environments.

The CRSP environment variable CRSPDB_SASCAL must be defined before the SASECRSP engine can access the CRSPAccess database calendars. The CRSP environment variable CRSPDB_SASCAL is necessary for the SASECRSP LIBNAME to assign successfully. This necessary environment variable should be defined automatically by either the CRSP software installation or, in later versions, the CRSP data installation. Since occasional instances occur where the variable is not set properly, always check to ensure the CRSPDB_SASCAL environment variable is set to the location where your most recent CRSP data resides. Remember to include the final slash or backslash required.

After the LIBNAME is assigned, you can access any of the available data sets/members within the opened database. For a complete description of available data sets and their fields, see the section “[Data Elements Reference: SASECRSP Interface Engine](#)” on page 2599.

The following options can be used in the LIBNAME libref SASECRSP statement:

SETID=*crsp_setidnumber*

Specifies the CRSP database you want to read from. SETID is a required option. Choose one SETID

from seven possible values in Table 38.1. The SETID limits the frequency selection of time series that are included in the SAS data set.

As an example, to access monthly CRSP Stock data, you would use the following statements:

```
LIBNAME myLib sasecrsp 'physical-name'
      SETID=20;
```

PERMNO=*crsp_permnumber*

By default, the SASECRSP engine reads all keys for the CRSPAccess database that you specified in your SASECRSP *libref*. The PERMNO= option enables you to select data from your CRSP database by the *PERMNO*(s) (or other keys) you specify. *PERMNO*s are CRSP's unique permanent issue identification number. There is no limit to the number of *crsp_permnumber* options that you can use.

From a performance standpoint, the PERMNO= option does efficient random access and reads *only* the data for the *PERMNO*s specified.

The following LIBNAME statement reads data only for Microsoft Corporation (PERMNO=10107) and International Business Machines Corporation (PERMNO=12490) using the primary PERMNO key, and thus is very efficient.

```
LIBNAME myLib sasecrsp 'physical-name'
      SETID=20
      PERMNO=10107
      PERMNO=12490;
```

The PERMCO=, CUSIP=, HCUSIP=, SICCD=, TICKER=, GVKEY=, and INDNO= options behave similarly and you can use them in conjunction with or in place of the PERMNO= option. For example you could have used the following statement to access monthly data for Microsoft and IBM:

```
LIBNAME myLib sasecrsp 'physical-name'
      SETID=20
      TICKER='MSFT'
      CUSIP=59491810;
```

Details on the use of other key selection options are described separately later.

*PERMNO*s specified by this option can select the companies or issues to keep for CRSP Stock or for CRSP/Compustat Merged databases, but *PERMNO* is not a supported option for CRSP Indices databases. Use the INDNO= option for the CRSP Indices database and use the PERMNO= option with CRSP US Stock and with CRSP/Compustat Merged databases. Details on the use of key selection options for each type of database follows.

STK Databases

PERMNO is the primary key for CRSP Stock databases. Every valid *PERMNO* you specify with the PERMNO= option keeps exactly one issue.

CCM Databases

PERMNO can be used as a secondary key for the CCM database through *CRSPLink*[™]. Linking between the CRSP and Compustat databases is a complex, many-to-many relationship between *PERMNO*/*PERMCO*s and *GVKEY*s. When accessing CCM data by *PERMNO*, all *GVKEY*s that link to the given *PERMNO* are amalgamated to provide seamless access to all linked data. However, note that accessing CCM data by *PERMNO* is logically different than accessing it by its linked *GVKEY*(s).

In particular, when the *PERMNO* you specify is linked to several different *GVKEY*s, one link is designated as the primary link. This designation is set by CRSP and its researchers, and serves in a specific role for the link information in the CCM database. Only data for the primary link is retrieved for the header. For other members, including all time series members, all links are examined, but data is extracted only for the active period of the links and only if the data is within any possible user-specified date restriction. If two or more *GVKEY*-to-*PERMNO* links overlap in time, data from the later (more recent) *GVKEY* is used. For more information about CRSP links, see “Link Used Array” in the *CRSP/Compustat Merged Database Guide*.

For example, *PERMNO*=10083 is CRSP’s unique issue identifier for Teknowledge Incorporated, and later (due to a name change) Cimflex Teknowledge Corporation. To access CCM data for IBM Corporation, Teknowledge Inc., and Cimflex Teknowledge Corp., you can use the following statement:

```
LIBNAME myLib1 sasecrsp 'physical-name'
                        SETID=200
                        GVKEY=6066      /* IBM */
                        PERMNO=10083;    /* Teknowledge and Cimflex */
```

Teknowledge Inc. and Cimflex Corp. have separate *GVKEY*s in the CCM database, so the previous statement is actually an example of using one *PERMNO* to access data for several (linked) *GVKEY*s. The first link to *GVKEY*=11947 spans March 5, 1986, to December 31, 1988, and the second link to *GVKEY*=15495 spans February 2, 1989, to September 9, 1993.

An alternate way of accessing the data is by using the linked *GVKEY*s directly as seen in this statement.

```
LIBNAME myLib2 sasecrsp 'physical-name'
                        SETID=200
                        GVKEY=6066
                        GVKEY=11947
                        GVKEY=15495;
```

These two LIBNAME statements look similar, but do not perform the same operation. **myLib1** assumes you are selecting the issue data for *PERMNO*=10083, so only observations from the CCM database that are **within** the time period of the used links are accessed. In the previous example for **myLib1**, only data ranging from March 5, 1986, to December 31, 1988, are extracted for *GVKEY*=11947 and only data ranging from February 28, 1989, to September 9, 1993, are extracted for *GVKEY*=15496.

Furthermore, while both *GVKEY*s 11947 and 15495 are linked to the *PERMNO*, *GVKEY* 15495 is the primary link, and when accessing the header, only 15495 is used. If the two links overlap, the data from the later (more recent) *GVKEY* of 15495 is used.

In contrast, **myLib2** uses an open range for all three specified keys. If there are data overlapping in time between *GVKEY* 11947 and 15495, data for both are reported. Similarly, when accessing the header, data for both 11947 and 15497 are retrieved.

IND Databases

INDNO is the primary key for accessing CRSP Indices databases. *PERMNO* is not available as a key for the IND (CRSP Indices) database; use *INDNO* for efficient access of IND database.

GVKEY=*crsp_gvkey*

The **GVKEY=** option is similar to the **PERMNO=** option. It enables you to use the Compustat's Permanent SPC Identifier key (*GVKEY*) to select the companies or issues to keep. There is no limit to the number of *crsp_gvkey* options that you can use.

STK Databases

GVKEY can serve as a secondary key for accessing CRSP Stock databases. This requires the additional use of the **CRSPLINKPATH=** option. Linking between the Compustat and CRSP databases is a complex, many-to-many relationship between *GVKEY*s and *PERMNO*/*PERMCO*s. When accessing CRSP data by *GVKEY*, all links of the specified *GVKEY* are followed and processed. No additional logic is applied, and link ranges are ignored. Accessing CRSP data by *GVKEY* is identical to accessing CRSP data by all of its linked *PERMNO*s.

For example, Wolverine Exploration Co. and Amerac Energy Corp have different *PERMNO*s but the same *GVKEY*, and there are two *identical* ways of accessing CRSP Stock data on these two entities.

```
LIBNAME myLib1 sasecrsp 'physical-name'
      SETID=10
      PERMNO=13638 /* Wolverine Exploration */
      PERMNO=84641; /* Amerac Energy */

LIBNAME myLib2 sasecrsp 'physical-name'
      SETID=10
      CRSPLINKPATH='physical-name'
      GVKEY=1544;
```

The **CRSPLINKPATH=** option is required when accessing CRSP Stock databases by *GVKEY*. See the discussion later in this section on the **CRSPLINKPATH=** option.

CCM Databases

GVKEY is the primary key for accessing the CCM database. Every valid *GVKEY* you specify keeps exactly one company.

IND Databases

INDNO is the primary key for accessing CRSP Indices databases; use *INDNO* instead of *GVKEY* for IND databases. *GVKEY* is not available as a key for accessing CRSP Indices databases.

PERMCO=*crsp_permcompany*

The PERMCO= option is similar to the PERMNO= option. It enables you to use the CRSP's unique permanent company identification key (*PERMCO*) to select the companies or issues to keep. There is no limit to the number of *crsp_permcompany* options that you can use.

STK Databases

PERMCO is a secondary key for accessing CRSP Stock databases. One *PERMCO* can map to multiple *PERMNOs*. Access by *PERMCO* is equivalent to access by all mapped *PERMNOs*.

CCM Databases

PERMCO can also be used as a secondary key for accessing the CCM database. Linking between the CRSP and CCM databases is a complex, many-to-many relationship. When accessing CCM data by *PERMCO*, all linking *GVKEYs* are amalgamated and processed. Link active ranges are respected. Only data for the primary link is returned for the header. In cases when the active ranges of various links overlap, the most recent link is used. See PERMNO= option for more details.

IND Databases

Use *INDNO* for accessing CRSP Indices databases. *PERMCO* is not available as a key for accessing CRSP Indices databases; use *INDNO* instead.

CUSIP=*crsp_cusip*

The CUSIP= option is similar to the PERMNO= option. It enables you to use the *CUSIP* key to select the companies or issues to keep. There is no limit to the number of *crsp_cusip* options that you can use.

STK Databases

CUSIP is a secondary key for accessing CRSP Stock databases. One *CUSIP* maps to one *PERMNO*.

CCM Databases

CUSIP is not available as a key for accessing CCM databases.

IND Databases

Use *INDNO* for accessing CRSP Indices databases. *CUSIP* is not available as a key for accessing CRSP Indices databases; use *INDNO* instead.

HCUSIP=*crsp_hcusip*

The HCUSIP= option is similar to the PERMNO= option. It enables you to use the historical CUSIP key, *HCUSIP*, to select the companies or issues to keep. There is no limit to the number of *crsp_hcusip* options that you can use.

STK Databases

HCUSIP is a secondary key for accessing CRSP Stock databases. One *HCUSIP* maps to one *PERMNO*.

CCM Databases

HCUSIP is not available as a key for accessing CCM databases.

IND Databases

Use *INDNO* for accessing CRSP Indices databases. *HCUSIP* is not available as a key for accessing CRSP Indices databases; use *INDNO* instead.

TICKER=crsp_ticker

The **TICKER=** option is similar to the **PERMNO=** option. It enables you to use the *TICKER* key to select the companies or issues to keep. There is no limit to the number of *crsp_ticker* options that you can use.

STK Databases

TICKER is a secondary key for accessing CRSP Stock databases. One *TICKER* maps to one *PERMNO*. Note that some *PERMNO*s are inaccessible by *TICKER*.

CCM Databases

TICKER is not available as a key for accessing CCM databases.

IND Databases

Use *INDNO* for accessing CRSP Indices databases. *TICKER* is not available as a key for accessing CRSP Indices databases; use *INDNO* instead.

SICCD=crsp_siccd

The **SICCD=** option is similar to the **PERMNO=** option. It enables you to use the Standard Industrial Classification (SIC) Code (*SICCD*) to select the companies or issues to keep. There is no limit to the number of *crsp_siccd* options that you can use.

STK Databases

SICCD is a secondary key for accessing CRSP Stock databases. One *SICCD* can map to multiple *PERMNO*s. All *PERMNO*s that have been classified once under the specified *SICCD* are mapped and data for them is retrieved. Access by *SICCD* is equivalent to access by all *PERMNO*s that have ever been classified under the specified *SICCD*.

CCM Databases

SICCD is not available as a key for accessing CCM databases.

IND Databases

Use *INDNO* for accessing CRSP Indices databases. *SICCD* is not available as a key for accessing CRSP Indices databases; use *INDNO* instead.

INDNO=crsp_indno

The **INDNO=** option is similar to the **PERMNO=** option. It enables you to use CRSP's permanent index number *INDNO* to select the companies or issues to keep. There is no limit to the number of *crsp_indno* options that you can use.

STK Databases

INDNO is not available as a key for accessing CRSP Stock databases, but it can be used in the combined CRSP Stock and Indices databases.

CCM Databases

INDNO is not available as a key for accessing CCM databases; use *GVKEY* instead.

IND Databases

INDNO is the primary key for accessing CRSP Indices databases. Every *INDNO* you specify keeps exactly one index series or group.

For example, you can use the following statement to access the CRSP NYSE Value-Weighted and Equal-Weighted daily market indices:

```
LIBNAME myLib3 sasecrsp 'physical-name'
               SETID=460
               INDNO=1000000 /* Value-Weighted */
               INDNO=1000001; /* Equal-Weighted */
```

CRSPLINKPATH='crsp_linkpath'

To access CRSP Stock data with *GVKEY*s, use the *CRSPLINKPATH=* option. *CRSPLINKPATH=* specifies the physical location where your CCM database resides. **NOTE:** The physical name must end in a slash for UNIX environments and a backslash for Windows environments.

RANGE='crsp_begdt-crsp_enddt'

To limit the time range of data read from your CRSPAccess database, specify the *RANGE=* option in your *SASECRSP libref*, where *crsp_begdt* is the beginning date in YYYYMMDD format and *crsp_enddt* is the ending date of the range in YYYYMMDD format.

As an example, to access monthly stock data for Microsoft Corporation and for International Business Machines Corporation for the first quarter of 1999, you can use the following statement:

```
LIBNAME myLib sasecrsp 'physical-name'
               SETID=20
               PERMNO=10107
               PERMNO=12490
               RANGE='19990101-19990331';
```

The given beginning and ending dates are interpreted as calendar dates by default. If you want these dates to be interpreted as fiscal dates, you must prepend the character 'f' to the range.

For example, the following statement extracts data for the 1994 fiscal year of both Microsoft and IBM.

```
LIBNAME myLib sasecrsp 'physical-name'
               SETID=20
               PERMNO=10107
               PERMNO=12490
               RANGE='f19940101-19941231';
```

The result of the previous statement is that data from actual calendar date July 1, 1993, to June 30, 1994, is extracted for Microsoft because its fiscal year end month is June. Data from January 1, 1994,

to December 31,1994, is extracted for IBM because its fiscal year end month is December. See [Example 38.10](#) for a more detailed example.

The RANGE= option can be used on all CRSP Stock, Indices, and CCM members. When this option is applied to segment data members however, the behavior is slightly different in the following ways.

- Dates associated with segment member data records are in years and can resolve only to years. This is unique to segment members. All other CRSP data members have a date resolution to the day. For example, monthly time series, though monthly, resolve to the last trading day of the month. However, segment members have a maximum resolution of years because they are not mapped to a calendar in the CRSP/Compustat database. Hence, when range restrictions are applied to segment members, only the 'YYYY' year portion of the range is considered.
- Multiple dates are sometimes associated with a particular segment member record. In such cases, the preferred date for use in determining the date range restriction is the data year as opposed to the source year. This multiple date behavior is unique only to segment members. All other CRSP data members are associated with only one date.

INSET='setname[,keyfieldname,keyfieldtype,date1field,date2field,datatype]'

When you specify a SAS data set named *setname* as input for issues, the SASECRSP engine assumes that a default PERMNO field that contains selected CRSP PERMNOs is present in the data set. If optional parameters are used, they must all be specified. The only acceptable shorthand for dropping the parameters is to drop those at the very end, assuming they are all being omitted. Dropped parameters use their defaults.

The optional parameters are explained below:

keyfieldname	label of the field that contains the keys to be selected. If unspecified, the default is "PERMNO".
keyfieldtype	specifies the CRSPAccess key type of the provided keys. Possible key types are: <i>PERMNO</i> , <i>PERMCO</i> , <i>CUSIP</i> , <i>HCUSIP</i> , <i>TICKER</i> , <i>SICCD</i> , <i>GVKEY</i> or <i>INDNO</i> . If unspecified, the default is "PERMNO".
date1field	beginning date of the specific date range restriction being applied to this key. If either <i>date1field</i> or <i>date2field</i> is omitted, the default is for there to be no date range restriction.
date2field	ending date of the specific date range restriction being applied to this key. If either <i>date1field</i> or <i>date2field</i> is omitted, the default is for there to be no date range restriction.
datatype	indicates whether the provided beginning and ending dates are calendar dates or fiscal dates. A fiscal date type means the dates given are based on the fiscal calendar of the respective company or GVKEY. A calendar date means the dates are based on the standard Julian calendar. The strings 'calendar' and 'fiscal' are used to indicate the respective date types. If unspecified, the default type is calendar. It is important to note that fiscal dates are applicable only to members with fiscal data. Fiscal members consists of all period descriptors, items, and segment members of the CCM database. If a fiscal date range is applied to nonfiscal members, it is ignored.

Individual date range restrictions specified by the inset can be used in combination with the RANGE= option on the LIBNAME. In such a case, only data from the intersection of the individual date restriction and the global RANGE= option date restriction are read.

Details: SASECRSP Interface Engine

Using the Inset Option

To better illustrate the use of the INSET= option, some examples follow:

Basic Inset Use: Providing a List of PERMNOs

This example uses the INSET= option to extract monthly data for a portfolio of three companies. No date range restriction is used.

```
data testin1;
    permno = 10107; output;
    permno = 12490; output;
    permno = 14322; output;
run;

LIBNAME mstk sasecrsp 'physical-name'
        SETID=20
        INSET='testin1';

proc print data=mstk.stkhead (keep=permno permco begdt enddt hcomnam htick);
run;
```

General Use of Inset for Specifying Lists of Keys

The following example illustrates the use of the INSET= option to select a few Index Series from the Indices database, companies from the CCM database, and securities from the Stock database. Libref **ind2** is used for accessing the Indices database with the two specified INDNOs. Libref **comp2** is used to access the CCM database with the two specified PERMCOs. Libref **sec3** is used to access the Stock database with the three specified TICKERs. Note the use of shorthand in specifying the INSET= option. The *date1field*, *date2field*, and *datatype* fields are all omitted, thereby using the default of no range restriction (though the range restriction set by the RANGE= on the LIBNAME statement still applies). For details including sample output, see [Example 38.4](#)

```
data indices;
    indno=1000000; output; /* NYSE Value-Weighted Market Index */
    indno=1000001; output; /* NYSE Equal-Weighted Market Index */
run;

libname ind2 sasecrsp "%sysget(CRSP_MSTK)" setid=420
        inset='indices,INDNO,INDNO' range='19990101-19990401';

title2 'Total Returns for NYSE Value and Equal Weighted Market Indices';
proc print data=ind2.tret label;
run;
```

```

data companies;
    permco=8045; output; /* Oracle */
    permco=20483; output; /* Citigroup */
run;

libname comp2 sasecrsp "%sysget(CRSP_CST)" setid=200
                    inset='companies,PERMCO,PERMCO'
                    range='20040101-20040531';

title2 'Link Info of Selected PERMCOs';
proc print data=comp2.link label; run;

title3 'Dividends Per Share for Oracle and Citigroup';
proc print data=comp2.div label; run;

data securities;
    ticker='BAC'; output; /* Bank of America */
    ticker='DUK'; output; /* Duke Energy */
    ticker='GSK'; output; /* GlaxoSmithKline */
run;

libname sec3 sasecrsp "%sysget(CRSP_MSTK)" setid=20
                    inset='securities,TICKER,TICKER'
                    range='19970820-19970920';

title2 'PERMNOs and General Header Info of Selected TICKERs';
proc print data=sec3.stkhead (keep=permno htick htsymbol) label;
run;

title3 'Average Price for Bank of America, Duke and GlaxoSmithKline';
proc print data=sec3.prc label; run;

```

Key-Specific Date Range Restriction with Insets

Suppose you not only want to select keys with your inset, but also want to specify a date range restriction for each key individually. The following example shows how to do this. Again, shorthand enables you to omit the datatype field. The provided dates default to a calendar interpretation. For details including the sample output, see [Example 38.5](#).

```

title2 'INSET=testin2 uses date ranges along with PERMNOs:';
title3 '10107, 12490, 14322, 25788';
title4 'Begin dates and end dates for each permno are used in the INSET';

data testin2;
    permno = 10107; date1 = 19980731; date2 = 19981231; output;
    permno = 12490; date1 = 19970101; date2 = 19971231; output;
    permno = 14322; date1 = 19950731; date2 = 19960131; output;
    permno = 25778; date1 = 19950101; date2 = 19950331; output;
run;

libname mstk2 sasecrsp "%sysget(CRSP_MSTK)" setid=20
                    inset='testin2,PERMNO,PERMNO,DATE1,DATE2';

```

```
data b;
    set mstk2.prc;
run;

proc print data=b;
run;
```

Fiscal Date Range Restrictions with Insets

You can use fiscal dates on the date range restrictions inside insets by specifying the date type. The following example shows two identical accesses, except one inset uses the date range restriction in fiscal terms, and the other inset uses the date range restriction in calendar terms. For details including sample output, see [Example 38.10](#).

```
data comp_fiscal;

    /* Crude Petroleum & Natural Gas */
    compkey=2416;
    begdate=19860101; enddate=19861231;
    datatype='fiscal';
    output;

    /* Commercial Intertech */
    compkey=3248;
    begdate=19940101; enddate=19941231;
    datatype='fiscal';
    output;
run;

data comp_calendar;

    /* Crude Petroleum & Natural Gas */
    compkey=2416;
    begdate=19860101; enddate=19861231;
    datatype='calendar';
    output;

    /* Commercial Intertech */
    compkey=3248;
    begdate=19940101; enddate=19941231;
    datatype='calendar';
    output;
run;

libname fisclib sasecrsp "%sysget(CRSP_CST)"
    SETID=200
    INSET='comp_fiscal, compkey, gvkey, begdate, enddate, datatype';

libname callib sasecrsp "%sysget(CRSP_CST)"
    SETID=200
    INSET='comp_calendar, compkey, gvkey, begdate, enddate, datatype';

title2 'Quarterly Period Descriptors with Fiscal Date Range';
```

```
proc print data=fisclib.qperdes(drop = peftnt1 peftnt2 peftnt3 peftnt4
    peftnt5 peftnt6 peftnt7 peftnt8 candxc flowcd spbond spdebt sppaper);
run;

title2 'Quarterly Period Descriptors with Calendar Date Range';
proc print data=callib.qperdes(drop = peftnt1 peftnt2 peftnt3 peftnt4
    peftnt5 peftnt6 peftnt7 peftnt8 candxc flowcd spbond spdebt sppaper);
run;
```

Inset Ranges in Conjunction with the LIBNAME Range

Suppose you want to specify individual date restrictions but also impose a common range. This example demonstrates two companies, each with its own date range restriction, but both companies are also subject to a common range set in the LIBNAME by the RANGE= option. As a result, data from August 1, 1999, to February 1, 2000, is retrieved for IBM, and data from January 1, 2001, to April 21, 2002, is retrieved for Microsoft. For details including sample output see [Example 38.11](#).

```
data two_companies;
    gvkey=6066; date1=19800101; date2=20000201; output;
    gvkey=12141; date1=20010101; date2=20051231; output;
run;

libname mylib sasecrsp "%sysget(CRSP_CST)"
    SETID=200
    INSET='two_companies,gvkey,gvkey,date1,date2'
    RANGE='19990801-20020421';

proc sql;
    select prcc.gvkey,prcc.caldt,prcc.ern
    from mylib.prcc as prcc, mylib.ern as ern
    where prcc.caldt = ern.caldt and
        prcc.gvkey = ern.gvkey;
quit;
```

The SAS Output Data Set

You can use the SAS DATA step to write the selected CRSP or Compustat data to a SAS data set. This enables you to easily analyze the data using SAS. When you specify the name of the output data set on the DATA statement, it causes the engine supervisor to create a SAS data set using the specified name in either the SAS WORK library or, if specified, the USER library.

The contents of the SAS data set include the DATE of each observation, the series name of each series read from the CRSPAccess database, event variables, and the label or description of each series/event or array.

You can use PROC PRINT and PROC CONTENTS to print your output data set and its contents. Alternatively, you can view your SAS output observations by opening the desired output data set in the SAS Explorer. You can also use PROC SQL with your SASECRSP libref to create a custom view of your data.

In general, CRSP missing values are represented as ‘.’ in the SAS data set. When accessing the CRSP STOCK data, SASECRSP uses the mapping shown in [Table 38.6](#) for converting CRSP missing values into SAS missing codes.

Table 38.6 Mapping of CRSP Stock Missing Values to SAS Missing Codes

CRSP Stock	SAS	Condition
–99	.	No valid price
–88	.A	Out of range
–77	.B	Off-exchange
–66	.C	No valid previous price
–55	.D	No delisting information
–44	.E	No valid comparison for an excess return

When accessing the CCM database, CRSP uses certain Compustat missing codes which SASECRSP then converts into SAS missing codes. [Table 38.7](#) shows the mapping of Compustat missing codes for the CCM database.

Table 38.7 Mapping of Compustat and SAS Missing Codes

Compustat	SAS	Condition
0.0001	.	No data for data item
0.0002	.S	Data is only on a semi-annual basis
0.0003	.A	Data is only on an annual basis
0.0004	.C	Combined into other item
0.0007	.N	Data is not meaningful
0.0008	.I	Reported as insignificant

Missing value codes conform with Compustat’s Strategic Insight and binary conventions for missing values. See *Notes on Missing Values* in the second chapter of the *CRSP/Compustat Merged Database Guide* for more information about how CRSP handles Compustat missing codes.

Understanding CRSP Date Formats, Informats, and Functions

CRSP has historically used two different methods to represent dates, while SAS has used a third. The three formats are SAS dates, CRSP dates, and integer dates. The SASECRSP engine provides 23 functions, 15 informats, and 10 formats to enable you to easily translate the dates from one internal representation to another. A SASECRSP LIBNAME assign must be active to use these date access methods. See [Example 38.6](#), “Converting Dates Using the CRSP Date Functions.”

SAS dates are stored internally as the number of days since January 1, 1960. The SAS method is an industry standard and provides a great deal of flexibility, including a wide variety of informats, formats, and functions.

CRSP dates are designed to ease time series storage and access. Internally, the dates are stored as an offset into an array of trading days or trading day calendar. Note that there are five different CRSP trading day calendars: Annual, Quarterly, Monthly, Weekly, and Daily. In this sense, there are five different types of

CRSP dates, one for each frequency of calendar it references. The CRSP method provides fewer missing values and makes trading period calculations very easy. However, there are also many valid calendar dates that are not available in the CRSP trading calendars, and care must be taken when using other dates.

Integer dates are a way to represent dates that are platform independent and maintain the correct sort order. However, the distance between dates is not maintained.

The best way to illustrate these formats is with some sample data. Table 38.8 shows date representations for CRSP daily and monthly data.

Table 38.8 Date Representations for Daily and Monthly Data

Date	SAS Date	CRSP Date (Daily)	CRSP Date (Monthly)	Integer Date
July 31, 1962	942	21	440	19620731
August 31, 1962	973	44	441	19620831
Dec. 30, 1998	14,243	9190	NA*	19981230
Dec. 31, 1998	14,244	9191	877	19981231

* Not available if an exact match is requested.

Having an understanding of the internal differences in representing SAS dates, CRSP dates, and CRSP integer dates helps you use the SASECRSP formats, informats, and functions effectively. Always keep in mind the frequency of the CRSP calendar that you are accessing when you specify a CRSP date.

The CRSP Date Formats

There are two types of formats for CRSP dates, and five frequencies are available for each of the two types. The two types are exact dates (CRSPDT*) and range dates (CRSPDR*), where the '*' can be A for annual, Q for quarterly, M for monthly, W for weekly, or D for daily. The ten types are: CRSPDTA, CRSPDTQ, CRSPDTM, CRSPDTW, CRSPDTD, CRSPDRA, CRSPDRQ, CRSPDRM, CRSPDRW, and CRSPDRD.

Table 38.9 shows some samples that use the monthly and daily calendar as examples. The Annual (CRSPDTA and CRSPDRA), Quarterly (CRSPDTQ and CRSPDRQ), and the Weekly (CRSPDTW and CRSPDRW) formats work analogously.

Table 38.9 Sample CRSPDT Formats for Daily and Monthly Data

Date	CRSP Date Daily, Monthly	CRSPDTD Daily Date	CRSPDRD Daily Range	CRSPDTM Monthly Date	CRSPDRM Monthly Range
July 31,1962	21, 440	19620731	19620731 +	19620731	19620630, 19620731
August 31,1962	44, 441	19620831	19620831 +	19620831	19620801, 19620831
Dec. 30,1998	9190, NA *	19981230	19981230 +	NA*	NA*
Dec. 31,1998	9191, 877	19981231	19981231 +	19981231	19981201, 19981231

+ Daily ranges look similar to Monthly Ranges if they are Mondays or immediately following a trading holiday.

* When working with exact matches, no CRSP monthly date exists for December 30, 1998.

The @CRSP Date Informats

There are three types of informats for CRSP dates, and five frequencies are available for each of the three types. The three types are exact (@CRSPDT*), range (@CRSPDR*), and backward (@CRSPDB*) dates, where the '*' can be A for annual, Q for quarterly, M for monthly, W for weekly, or D for daily. The fifteen formats are: @CRSPDTA, @CRSPDTQ, @CRSPDTM, @CRSPDTW, @CRSPDTD, @CRSPDRA, @CRSPDRQ, @CRSPDRM, @CRSPDRW, @CRSPDRD, @CRSPDBA, @CRSPDBQ, @CRSPDBM, @CRSPDBW, and @CRSPDBD.

The five CRSPDT* informats find exact matches only. The five CRSPDR* informats look for an exact match, and if an exact match is not found, they go forward, matching the CRSPDR* formats. The five CRSPDB* informats look for an exact match, and if an exact match is not found, they go backward.

Table 38.10 shows a sample that uses only the CRSP monthly calendar as an example. The daily, weekly, quarterly, and annual frequencies work analogously.

Table 38.10 Sample @CRSP Date Informats Using Monthly Data

Input Date (Integer Date)	CRSP Date CRSPDTM	CRSP Date CRSPDRM	CRSP Date CRSPDBM	CRSPDTM Monthly Date	CRSPDRM Monthly Range
19620731	440	440	440	19620731	19620630 to 19620731
19620815	.(missing)	441	440	See below+	See below*
19620831	441	441	441	19620831	19620801 to 19620831

+ If missing, then missing. If 441, then 19620831. If 440, then 19620731.

* If missing, then missing. If 441, then 19620801 to 19620831. If 440, then 19620630 to 19620731.

The CRSP Date Functions

Table 38.11 shows the 23 date functions provided with the SASECRSP engine. These functions are used internally by the engine, but also are available to the end users. There are seven groups of functions. The first four have five functions each, one for each CRSP calendar frequency. The next two are for converting between SAS and Integer date formats. The last function does not convert between formats, but is a shifting function for shifting integer dates based on a fiscal calendar to normal calendar time. In this shift function, the second argument holds the fiscal year-end month of the fiscal calendar used.

Table 38.11 CRSP Date Functions

Function Group	Function Name	Argument One	Argument Two	Return Value
CRSP dates to integer dates for December 31, 1998				
Annual	crspdcia	74	None	19981231
Quarterly	crspdciq	293	None	19981231
Monthly	crspdcim	877	None	19981231
Weekly	crspdciw	1905	None	19981231
Daily	crspdcid	9191	None	19981231
CRSP dates to SAS dates for December 31, 1998				
Annual	crspdcsa	74	None	14,244
Quarterly	crspdcsq	293	None	14,244
Monthly	crspdcsm	877	None	14,244
Weekly	crspdcsw	1905	None	14,244
Daily	crspdcscd	9191	None	14,244
Integer dates to CRSP dates exact is illustrated, but can be forward or backward				
Annual	crspdica	19981231	0	74
Quarterly	crspdicq	19981231	0	293
Monthly	crspdicm	19981231	0	877
Weekly	crspdicw	19981231	0	1905
Daily	crspdicd	19981231	0	9191
SAS dates to CRSP dates exact is illustrated, but can be forward or backward				
Annual	crspdsca	14,244	0	74
Quarterly	crspdsq	14,244	0	293
Monthly	crspdscm	14,244	0	877
Weekly	crspdscw	14,244	0	1905
Daily	crspdsd	14,244	0	9191
Integer dates to SAS dates for December 31, 1998				
Integer to SAS	crspdi2s	19981231	None	14,244
SAS dates to integer dates for December 31, 1998				
SAS to Integer	crspds2i	14,244	None	19981231
Fiscal to calendar shifting of integer dates for December 31, 1998				
Fiscal to Calendar Shift	crspdf2c	20021231	8	20020831

Data Elements Reference: SASECRSP Interface Engine

Data sets are made available based on the type of CRSP database opened. [Table 38.12](#), [Table 38.13](#), and [Table 38.14](#) show summary views of the three types of CRSP databases (Stock, CCM, and Indices) and the data sets they make available. Details on the data sets including their specific fields can be found in sections immediately following the summary tables. You can also see the available data sets for an opened database via the SAS Explorer by opening a SASECRSP libref that you have previously assigned.

Table 38.12 Summary of All Available Data Sets by CRSP Database Type

CRSP Database	Data Set Name	Reference Table Title	Reference Table
STOCK	STKHEAD	Header Identification and Summary Data	Table 38.15
	NAMES	Name History Array	Table 38.16
	DISTS	Distribution Event Array	Table 38.17
	SHARES	Shares Outstanding Observation Array	Table 38.18
	DELIST	Delisting History Array	Table 38.19
	NASDIN	NASDAQ Information Array	Table 38.20
	PRC	Price or Bid/Ask Average Time Series	Table 38.21
	RET	Returns Time Series	Table 38.21
	BIDLO	Bid or Low Price Time Series	Table 38.21
	ASKHI	Ask or High Price Time Series	Table 38.21
CRSP Stock Database	BID	Bid Time Series	Table 38.21
	ASK	Ask Time Series	Table 38.21
	RETX	Returns Without Dividends Time Series	Table 38.21
	SPREAD	Spread Between Bid and Ask	Table 38.21
	ALTPRC	Price Alternate Time Series	Table 38.21
	VOL	Volume Time Series	Table 38.21
	NUMTRD	Number of Trades Time Series	Table 38.21
	ALTPRCDT	Price Alternate Date Time Series	Table 38.21
	PORT1	Portfolio Data for Portfolio Type 1	Table 38.22
	PORT2	Portfolio Data for Portfolio Type 2	Table 38.22
	PORT3	Portfolio Data for Portfolio Type 3	Table 38.22
	PORT4	Portfolio Data for Portfolio Type 4	Table 38.22
	PORT5	Portfolio Data for Portfolio Type 5	Table 38.22
	PORT6	Portfolio Data for Portfolio Type 6	Table 38.22
	PORT7	Portfolio Data for Portfolio Type 7	Table 38.22
	PORT8	Portfolio Data for Portfolio Type 8	Table 38.22
	PORT9	Portfolio Data for Portfolio Type 9	Table 38.22
	GROUP16	Group Data for Group Type 16	Table 38.22

Table 38.13 Summary of All Available Data Sets by CRSP Database Type

CRSP Database	Data Set Name	Reference Table Title	Reference Table
CCM	CSTHEAD	Compustat Header Data	Table 38.23
	CSTNAME	Compustat Description History Array	Table 38.24
	LINK	CRSP Compustat Link History	Table 38.25
	APERDES	Annual Period Descriptors Time Series	Table 38.26
	QPERDES	Quarterly Period Descriptors Time Series	Table 38.27
	IAITEMS	Annual Data Items	Table 38.28
	IQITEMS	Quarterly Data Items	Table 38.29
	BAITEMS	Bank Annual Data Items	Table 38.30
	BQITEMS	Bank Quarterly Data Items	Table 38.31
	PRCH	High Price Time Series	Table 38.32
	PRCL	Low Price Time Series	Table 38.32
	PRCC	Closing Price Time Series	Table 38.32
	DIV	Dividends Per Share Time Series	Table 38.32
	ERN	Earnings Per Share Time Series	Table 38.32
	SHSTRD	Shares Traded Time Series	Table 38.32
	DIVRTE	Annualized Dividend Rate Time Series	Table 38.32
	RAWADJ	Raw Adjustment Factor Time Series	Table 38.32
	CUMADJ	Cumulative Adjustment Factor Time Series	Table 38.32
	BKV	Book Value Per Share Time Series	Table 38.32
CRSP/ Compustat Merged Database	CHEQVM	Cash Equivalent Distribution Time Series	Table 38.32
	CSHOQ	Common Shares Outstanding Time Series	Table 38.32
	NAVM	Net Asset Value Time Series	Table 38.32
	OEPS12	Earnings/Share from Operations	Table 38.32
	GICS	Global Industry Class. Std. code	Table 38.32
	CPSPIN	S&P Index Primary Marker Time Series	Table 38.32
	DIVFT	Dividends per share footnotes	Table 38.32
	RAWADJFT	Raw adjustment factor footnotes	Table 38.32
	COMSTAFT	Comparability status footnotes	Table 38.32
	ISAFT	Issue status alert footnotes	Table 38.32
	SEGSRC	Operating Segment Source History	Table 38.33
	SEGPROD	Operating Segment Products History	Table 38.34
	SEGCUST	Operating Segment Customer History	Table 38.35
	SEGDTL	Operating Segment Detail History	Table 38.36
	SEGNAICS	Operating Segment NAICS History	Table 38.37
	SEGCEO	Geographic Segment History	Table 38.38
	SEGCUR	Segment Currency Data	Table 38.39
	SEGITM	Segment Item Data	Table 38.40

Table 38.14 Summary of All Available Data Sets by CRSP Database Type

CRSP Database	Data Set Name	Reference Table Title	Reference Table
IND	INDHEAD	Index Header Data	Table 38.41
	REBAL	Index Rebalancing History Arrays	Table 38.42
	REBAL	Index Rebalancing History Group Arrays	Table 38.43
	LIST	Index Membership List Arrays	Table 38.44
	LIST	Index Membership List Groups Arrays	Table 38.45
	USDCNT	Portfolio Used Count Array	Table 38.46
	TOTCNT	Portfolio Total Count Array	Table 38.47
	USDCNT	Portfolio Used Count Time Series Groups	Table 38.48
	TOTCNT	Portfolio Total Count Time Series Groups	Table 38.49
	USDVAL	Portfolio Used Value Array	Table 38.50
	TOTVAL	Portfolio Total Value Array	Table 38.51
	USDVAL	Portfolio Used Value Time Series Groups	Table 38.52
	TOTVAL	Portfolio Total Value Time Series Groups	Table 38.53
	TRET	Total Returns Time Series	Table 38.54
	ARET	Appreciation Returns Time Series	Table 38.55
CRSP Indices Database	IRET	Income Returns Time Series	Table 38.56
	TRET	Total Returns Time Series Groups	Table 38.57
	ARET	Income Returns Time Series Groups	Table 38.58
	IRET	Income Returns Time Series Groups	Table 38.59
	TIND	Total Return Index Levels Time Series	Table 38.60
	AIND	Appreciation Index Levels Time Series	Table 38.61
	IIND	Income Index Levels Time Series	Table 38.62
	TIND	Total Return Index Levels Groups	Table 38.63
	AIND	Appreciation Index Levels Groups	Table 38.64
	IIND	Income Index Levels Time Series Groups	Table 38.65

Available CRSP Stock Data Sets

STKHEAD Data Set—Header Identification & Summary Data

Table 38.15 STKHEAD Data Set—Header Identification & Summary Data

Fields	Label	Type
PERMNO	PERMNO	Numeric
PERMCO	PERMCO	Numeric
COMPNO	NASDAQ Company Number	Numeric
ISSUNO	NASDAQ Issue Number	Numeric
HEXCD	Exchange Code Header	Numeric
HSHRCD	Share Code Header	Numeric
HSICCD	Standard Industrial Classification Code	Numeric
BEGDT	Begin of Stock Data	Numeric

Table 38.15 *continued*

Fields	Label	Type
ENDDT	End of Stock Data	Numeric
DLSTCD	Delisting Code Header	Numeric
HCUSIP	CUSIP Header	Character
HTICK	Ticker Symbol Header	Character
HCOMNAM	Company Name Header	Character
HTSYMBOL	Trading Symbol Header	Character
HNAICS	North American Industry Classification Header	Character
HPRIMEXC	Primary Exchange Header	Character
HTRDSTAT	Trading Status Header	Character
HSECSTAT	Security Status Header	Character

NAMES Data Set—Name History Array**Table 38.16** NAMES Data Set—Name History Array

Fields	Label	Type
PERMNO	PERMNO	Numeric
NAMEDT	Names Date	Numeric
NAMEENDT	Names Ending Date	Numeric
SHRCD	Share Code	Numeric
EXCHCD	Exchange Code	Numeric
SICCD	Standard Industrial Classification Code	Numeric
NCUSIP	CUSIP	Numeric
TICKER	Ticker Symbol	Character
COMNAM	Company Name	Character
SHRCLS	Share Class	Numeric
TSYMBOL	Trading Symbol	Character
NAICS	North American Industry Classification System	Character
PRIMEXCH	Primary Exchange	Character
TRDSTAT	Trading Status	Character
SECSTAT	Security Status	Character

DISTS Data Set—Distribution Event Array**Table 38.17** DISTS Data Set—Distribution Event Array

Fields	Label	Type
PERMNO	PERMNO	Numeric
DISTCD	Distribution Code	Numeric
DIVAMT	Dividend Cash Amount	Numeric
FACPR	Factor to Adjust Price	Numeric
FACSHR	Factor to Adjust Share	Numeric
DCLRDT	Distribution Declaration Date	Numeric
EXDT	Ex-Distribution Date	Numeric
RCRDDT	Record Date	Numeric

Table 38.17 *continued*

Fields	Label	Type
PAYDT	Payment Date	Numeric
ACPERM	Acquiring PERMNO	Numeric
ACCOMP	Acquiring PERMCO	Numeric

SHARES Data Set—Shares Outstanding Observation Array**Table 38.18** SHARES Data Set—Shares Outstanding Observation Array

Fields	Label	Type
PERMNO	PERMNO	Numeric
SHROUT	Shares Outstanding	Numeric
SHRSDT	Shares Observation Date	Numeric
SHREDDT	Shares Observation End Date	Numeric
SHRFLG	Shares Outstanding Observation Flag	Numeric

DELIST Data Set—Delisting History Array**Table 38.19** DELIST Data Set—Delisting History Array

Fields	Label	Type
PERMNO	PERMNO	Numeric
DLSTDT	Delisting Date	Numeric
DLSTCD	Delisting Code	Numeric
NWPERM	New PERMNO	Numeric
NWCOMP	New PERMCO	Numeric
NEXTD	Delisting Next Price Date	Numeric
DLAMT	Delisting Amount	Numeric
DLRETX	Delisting Return Without Dividends	Numeric
DLPRC	Delisting Price	Numeric
DLPDT	Delisting Amount Date	Numeric
DLRET	Delisting Return	Numeric

NASDIN Data Set—NASDAQ Information Array**Table 38.20** NASDIN Data Set—NASDAQ Information Array

Fields	Label	Type
PERMNO	PERMNO	Numeric
TRTSCD	NASDAQ Traits Code	Numeric
TRTSDT	NASDAQ Traits Date	Numeric
TRTSENDT	NASDAQ Traits End Date	Numeric
NMSIND	NASDAQ National Market Indicator	Numeric
MMCNT	Market Maker Count	Numeric
NSDINX	Nasd Index Code	Numeric

STOCK Time Series Data Sets**Table 38.21** STOCK Time Series Data Sets

Data Set Name, Long Name	Fields	Label	Type
PRC	PERMNO	PERMNO	Numeric
Price or Bid/Ask	CALDT	Calendar Trading Date	Numeric
Average Time Series	PRC	Price or Bid/Ask Aver	Numeric
RET	PERMNO	PERMNO	Numeric
Returns	CALDT	Calendar Trading Date	Numeric
Time Series	RET	Returns	Numeric
ASKHI	PERMNO	PERMNO	Numeric
Ask or High Price	CALDT	Calendar Trading Date	Numeric
Time Series	ASKHI	Ask or High Price	Numeric
BIDLO	PERMNO	PERMNO	Numeric
Bid or Low Price	CALDT	Calendar Trading Date	Numeric
Time Series	BIDLO	Bid or Low Price	Numeric
BID	PERMNO	PERMNO	Numeric
Bid	CALDT	Calendar Trading Date	Numeric
Time Series	BID	Bid	Numeric
ASK	PERMNO	PERMNO	Numeric
Ask	CALDT	Calendar Trading Date	Numeric
Time Series	ASK	Ask	Numeric
RETX	PERMNO	PERMNO	Numeric
Returns without	CALDT	Calendar Trading Date	Numeric
Dividends	RETX	Returns w/o Dividends	Numeric
SPREAD	PERMNO	PERMNO	Numeric
Spread Between Bid	CALDT	Calendar Trading Date	Numeric
and Ask Time Series	SPREAD	Spread Between Bid Ask	Numeric
ALTPRC	PERMNO	PERMNO	Numeric
Price Alternate	CALDT	Calendar Trading Date	Numeric
Time Series	ALTPRC	Price Alternate	Numeric
VOL	PERMNO	PERMNO	Numeric
Volume Time Series	CALDT	Calendar Trading Date	Numeric
	VOL	Volume	Numeric
NUMTRD	PERMNO	PERMNO	Numeric
Number of Trades	CALDT	Calendar Trading Date	Numeric
Time Series	NUMTRD	Number of Trades	Numeric
ALTPRCDT	PERMNO	PERMNO	Numeric
Alternate Price	CALDT	Calendar Trading Date	Numeric
Date Time Series	ALTPRCDT	Alternate Price Date	Numeric

Portfolio and Group Data Sets

Table 38.22 Portfolio and Group Data Sets

Data Set	Fields	Label	Type
PORT1	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 1	CALDT	Calendar Trading Date	Numeric
	PORT1	Portfolio Assignment for Portfolio Type 1	Numeric
	STAT1	Portfolio Statistic for Portfolio Type 1	Numeric
PORT2	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 2	CALDT	Calendar Trading Date	Numeric
	PORT2	Portfolio Assignment for Portfolio Type 2	Numeric
	STAT2	Portfolio Statistic for Portfolio Type 2	Numeric
PORT3	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 3	CALDT	Calendar Trading Date	Numeric
	PORT3	Portfolio Assignment for Portfolio Type 3	Numeric
	STAT3	Portfolio Statistic for Portfolio Type 3	Numeric
PORT4	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 4	CALDT	Calendar Trading Date	Numeric
	PORT4	Portfolio Assignment for Portfolio Type 4	Numeric
	STAT4	Portfolio Statistic for Portfolio Type 4	Numeric
PORT5	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 5	CALDT	Calendar Trading Date	Numeric
	PORT5	Portfolio Assignment for Portfolio Type 5	Numeric
	STAT5	Portfolio Statistic for Portfolio Type 5	Numeric
PORT6	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 6	CALDT	Calendar Trading Date	Numeric
	PORT6	Portfolio Assignment for Portfolio Type 6	Numeric
	STAT6	Portfolio Statistic for Portfolio Type 6	Numeric
PORT7	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 7	CALDT	Calendar Trading Date	Numeric
	PORT7	Portfolio Assignment for Portfolio Type 7	Numeric
	STAT7	Portfolio Statistic for Portfolio Type 7	Numeric
PORT8	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 8	CALDT	Calendar Trading Date	Numeric
	PORT8	Portfolio Assignment for Portfolio Type 8	Numeric
	STAT8	Portfolio Statistic for Portfolio Type 8	Numeric
PORT9	PERMNO	PERMNO	Numeric
Portfolio data for Portfolio Type 9	CALDT	Calendar Trading Date	Numeric
	PORT9	Portfolio Assignment for Portfolio Type 9	Numeric
	STAT9	Portfolio Statistic for Portfolio Type 9	Numeric
GROUP16	PERMNO	PERMNO	Numeric
Group data for Group Type 16	GRPDT	Group Beginning Date	Numeric
	GRPENDDT	Group Ending Date	Numeric
	GRPFLAG	Group Flag of Associated Index	Numeric
	GRPSU	Group Subflag	Numeric

Available Compustat Data Sets

CSTHEAD Data Set—Compustat Header Data

Table 38.23 CSTHEAD Data Set—Compustat Header Data

Fields	Label	Type
GVKEY	GVKEY	Numeric
IPERM	Header CRSP issue PERMNO link	Numeric
ICOMP	Header CRSP company PERMCO link	Numeric
BEGYR	Annual date of earliest data (yyyy)	Numeric
ENDYR	Annual date of latest data (yyyy)	Numeric
BEGQTR	Quarterly date of earliest data (yyyy.q)	Numeric
ENDQTR	Quarterly date of latest data (yyyy.q)	Numeric
AVAILFLG	Code of available CST data types	Numeric
DNUM	Industry code	Numeric
FILE	File identification code	Numeric
ZLIST	Exchange listing and S&P Index code	Numeric
STATE	State identification code	Numeric
COUNTY	County identification code	Numeric
STINC	State incorporation code	Numeric
FINC	Foreign incorporation code	Numeric
XREL	S&P Industry Index relative code	Numeric
STK	Stock ownership code	Numeric
DUP	Duplicate file code	Numeric
CCNDX	Current Canadian Index Code	Numeric
GICS	Global Industry Class. Std. code	Numeric
IPODT	IPO date	Numeric
BEGDT	First date of Compustat data	Numeric
ENDDT	Last date of Compustat data	Numeric
FUNDF1	Fundamental File Identification Code 1	Numeric
FUNDF2	Fundamental File Identification Code 2	Numeric
FUNDF3	Fundamental File Identification Code 3	Numeric
NAICS	North American Industry Classification	Character
CPSPIN	Primary S&P index marker	Character
CSSPIN	Secondary S&P index marker	Character
CSSPII	Subset S&P index marker	Character
SUBDBT	Current S&P Subordinated Debt Rating	Character
CPAPER	Current S&P Commercial Paper Rating	Character
SDBT	Current S&P Senior Debt Rating	Character
SDBTIM	Current S&P Senior Debt Rating-Footer	Character
CNUM	CUSIP issuer code	Character
CIC	Issuer number	Character
CONAME	Company name	Character
INAME	Industry name	Character
SMBL	Stock ticker symbol	Character
EIN	Employer Identification Number	Character

Table 38.23 *continued*

Fields	Label	Type
INCORP	Incorporation ISO Country Code	Character
RCST3	Reserved 3	Character

CSTNAME Data Set—Compustat Description History Array**Table 38.24** CSTNAME Data Set—Compustat Description History Array

Fields	Label	Type
GVKEY	GVKEY	Numeric
CHGDT	Effective date of this description	Numeric
CHGENDDT	Last effective date of this description	Numeric
DNUM	Industry code	Numeric
FILE	File identification code	Numeric
ZLIST	Exchange listing and S&P Index code	Numeric
STATE	State identification code	Numeric
COUNTY	County identification code	Numeric
STINC	State incorporation code	Numeric
FINC	Foreign incorporation code	Numeric
XREL	S&P Industry Index relative code	Numeric
STK	Stock ownership code	Numeric
DUP	Duplicate file code	Numeric
CCNDX	Current Canadian Index Code	Numeric
GICS	Global Industry Classification Std. code	Numeric
IPODT	IPO date	Numeric
RCST1	Reserved 1	Numeric
RCST2	Reserved 2	Numeric
FUNDF1	Fundamental File Identification Code 1	Numeric
FUNDF2	Fundamental File Identification Code 2	Numeric
FUNDF3	Fundamental File Identification Code 3	Numeric
NAICS	North American Industry Classification	Character
CPSPIN	Primary S&P index marker	Character
CSSPIN	Secondary S&P index marker	Character
CSSPII	Subset S&P index marker	Character
SUBDBT	Current S&P Subordinated Debt Rating	Character
CPAPER	Current S&P Commercial Paper Rating	Character
SDBT	Current S&P Senior Debt Rating	Character
SDBTIM	Current S&P Senior Debt Rating-Footer	Character
CNUM	CUSIP issuer code	Character
CIC	Issuer number	Character
CONAME	Company name	Character
INAME	Industry name	Character
SMBL	Stock ticker symbol	Character
EIN	Employer Identification Number	Character
INCORP	Incorporation ISO Country Code	Character
RCST3	Reserved 3	Character

LINK Data Set—CRSP Compustat Link History**Table 38.25** LINK Data Set—CRSP Compustat Link History

Fields	Label	Type
GVKEY	GVKEY	Numeric
LINKDT	First date link is valid	Numeric
LINKENDT	Last date link is valid	Numeric
NPERMNO	CRSP PERMNO linked	Numeric
NPERMCO	CRSP PERMCO linked	Numeric
LINKTYPE	Link type code	Character
LINKFLAG	Linking Flag	Character

APERDES Data Set—Annual Period Descriptors Time Series**Table 38.26** APERDES Data Set—Annual Period Descriptors Time Series

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
DATYR	Data Year	Numeric
DATQTR	Data Quarter	Numeric
FISCYR	Fiscal year-end month of data	Numeric
CALYR	Calendar year	Numeric
CALQTR	Calendar quarter	Numeric
UPCODE	Update code	Numeric
SRCDOC	Source document code	Numeric
SPBOND	S&P Senior Debt Rating	Numeric
SPDEBT	S&P Subordinated Debt Rating	Numeric
SPPAPER	S&P Commercial Paper Rating	Numeric
SPRANK	Common Stock Ranking	Numeric
MAJIND	Major Index Code	Numeric
INDIND	S&P Industry Index Code	Numeric
REPDT	Report date of quarterly earnings	Numeric
FLOWCD	Flow of funds statement format code	Numeric
CANDXC	Canadian index code	Numeric
PEFTNT1	Period Descriptor Footnote 1 Source Document Code	Character
PEFTNT2	Period Descriptor Footnote 2 Month of Deletion	Character
PEFTNT3	Period Descriptor Footnote 3 Year of Deletion	Character
PEFTNT4	Period Descriptor Footnote 4 Reason For Deletion	Character
PEFTNT5	Period Descriptor Footnote 5 Unused	Character
PEFTNT6	Period Descriptor Footnote 6 Unused	Character
PEFTNT7	Period Descriptor Footnote 7 Unused	Character
PEFTNT8	Period Descriptor Footnote 8 Unused	Character

QPERDES Data Set—Quarterly Period Descriptors Time Series**Table 38.27** QPERDES Data Set—Quarterly Period Descriptors Time Series

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
DATYR	Data Year	Numeric
DATQTR	Data Quarter	Numeric
FISCYR	Fiscal year-end month of data	Numeric
CALYR	Calendar year	Numeric
CALQTR	Calendar quarter	Numeric
UPCODE	Update code	Numeric
SRCDOC	Source document code	Numeric
SPBOND	S&P Senior Debt Rating	Numeric
SPDEBT	S&P Subordinated Debt Rating	Numeric
SPPAPER	S&P Commercial Paper Rating	Numeric
SPRANK	Common Stock Ranking	Numeric
MAJIND	Major Index Code	Numeric
INDIND	S&P Industry Index Code	Numeric
REPDT	Report date of quarterly earnings	Numeric
FLOWCD	Flow of funds statement format code	Numeric
CANDXC	Canadian index code	Numeric
PEFTNT1	Period Descriptor Footnote 1 Comparability Status	Character
PEFTNT2	Period Descriptor Footnote 2 Company Status Alert	Character
PEFTNT3	Period Descriptor Footnote 3 S&P Senior Debt Rating	Character
PEFTNT4	Period Descriptor Footnote 4 Reason For Deletion	Character
PEFTNT5	Period Descriptor Footnote 5 Unused	Character
PEFTNT6	Period Descriptor Footnote 6 Unused	Character
PEFTNT7	Period Descriptor Footnote 7 Unused	Character
PEFTNT8	Period Descriptor Footnote 8 Unused	Character

IAITEMS Data Set—Annual Data Items**Table 38.28** IAITEMS Data Set—Annual Data Items

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
IA1	Cash and Short Term Investments	Numeric
IA2	Receivables—Total	Numeric
IA3	Inventories—Total	Numeric
IA4	Current Assets—Total	Numeric
IA5	Current Liabilities Total	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA6	Assets Total Liabilities and Stockholders' Equity Total	Numeric
IA7	Property, Plant, and Equipment Total (Gross)	Numeric
IA8	Property, Plant, and Equipment Total (Net)	Numeric
IA9	Long-Term Debt—Total	Numeric
IA10	Preferred Stock Liquidating Value	Numeric
IA11	Common Equity Tangible	Numeric
IA12	Sales (Net)	Numeric
IA13	Operating Income Before Depreciation	Numeric
IA14	Depreciation and Amortization Income Statement)	Numeric
IA15	Interest Expense	Numeric
IA16	Income Taxes—Total	Numeric
IA17	Special Items	Numeric
IA18	Income Before Extraordinary Items	Numeric
IA19	Dividends—Preferred	Numeric
IA20	Income Before Extraordinary Items Adj for Com Stk Equiv Dollar Savings	Numeric
IA21	Dividends—Common	Numeric
IA22	Price—High	Numeric
IA23	Price—Low	Numeric
IA24	Price—Close	Numeric
IA25	Common Shares Outstanding	Numeric
IA26	Dividends Per Share by Ex-Date	Numeric
IA27	Adjustment Factor (Cumulative) by Ex-Date	Numeric
IA28	Common Shares Traded	Numeric
IA29	Employees	Numeric
IA30	Property, Plant, and Equipment Capital Expenditures (Schedule V)	Numeric
IA31	Investments and Advances Equity Method	Numeric
IA32	Investments and Advances—Other	Numeric
IA33	Intangibles	Numeric
IA34	Debt in Current Liabilities	Numeric
IA35	Deferred Taxes and Investment Tax Credit (Balance Sheet)	Numeric
IA36	Retained Earnings	Numeric
IA37	Invested Capital Total	Numeric
IA38	Minority Interest Balance Sheet	Numeric
IA39	Convertible Debt and Preferred Stock	Numeric
IA40	Common Shares Reserved for Conversion—Total	Numeric
IA41	Cost of Goods Sold	Numeric
IA42	Labor and Related Expense	Numeric
IA43	Pension and Retirement Expense	Numeric
IA44	Debt—Due in One Year	Numeric
IA45	Advertising Expense	Numeric
IA46	Research and Development Expense	Numeric
IA47	Rental Expense	Numeric
IA48	Extraordinary Items and Discontinued Operations	Numeric
IA49	Minority Interest (Income Account)	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA50	Deferred Taxes (Income Account)	Numeric
IA51	Investment Tax Credit (Income Account)	Numeric
IA52	Net Operating Loss Carry Forward Unused Portion	Numeric
IA53	Earnings Per Share (Basic)—Including Extraordinary Items	Numeric
IA54	Common Shares Used to Calculate Earnings Per Share (Basic)	Numeric
IA55	Equity in Earnings	Numeric
IA56	Preferred Stock Redemption Value	Numeric
IA57	Earnings Per Share (Diluted)—Excluding Extraordinary Items	Numeric
IA58	Earnings Per Share (Basic)—Excluding Extraordinary Items	Numeric
IA59	Inventory Valuation Method	Numeric
IA60	Common Equity—Total	Numeric
IA61	Non-operating Income (Expense)	Numeric
IA62	Interest Income	Numeric
IA63	Income Taxes—Federal Current	Numeric
IA64	Income Taxes—Foreign Current	Numeric
IA65	Amortization of Intangibles	Numeric
IA66	Discontinued Operations	Numeric
IA67	Receivables Estimated Doubtful	Numeric
IA68	Current Assets—Other	Numeric
IA69	Assets—Other	Numeric
IA70	Accounts Payable	Numeric
IA71	Income Taxes Payable	Numeric
IA72	Current Liabilities Other	Numeric
IA73	Property, Plant, and Equipment—Construction in Progress (Net)	Numeric
IA74	Deferred Taxes (Balance Sheet)	Numeric
IA75	Liabilities—Other	Numeric
IA76	Inventories—Raw Materials	Numeric
IA77	Inventories—Work in Progress	Numeric
IA78	Inventories Finished Goods	Numeric
IA79	Debt—Convertible	Numeric
IA80	Debt—Subordinated	Numeric
IA81	Debt—Notes	Numeric
IA82	Debt—Debentures	Numeric
IA83	Long—Term Debt Other	Numeric
IA84	Debt—Capitalized Lease Obligations	Numeric
IA85	Common Stock	Numeric
IA86	Treasury Stock Memo Entry	Numeric
IA87	Treasury Stock Number of Common Shares	Numeric
IA88	Treasury Stock—Total Dollar Amount	Numeric
IA89	Pension Costs—Unfunded Vested Benefits	Numeric
IA90	Pension Costs—Unfunded Past or Prior Service	Numeric
IA91	Debt—Maturing In Second Year	Numeric
IA92	Debt—Maturing In Third Year	Numeric
IA93	Debt—Maturing In Fourth Year	Numeric
IA94	Debt—Maturing In Fifth Year	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA95	Rental Commitments Minimum—Five Years Total	Numeric
IA96	Rental Commitments Minimum—First Year	Numeric
IA97	Retained Earnings Unrestricted	Numeric
IA98	Order Backlog	Numeric
IA99	Retained Earnings Restatement	Numeric
IA100	Common Shareholders	Numeric
IA101	Interest Expense on Long-Term Debt	Numeric
IA102	Excise Taxes	Numeric
IA103	Depreciation Expense (Schedule VI)	Numeric
IA104	Short-Term Borrowing Average	Numeric
IA105	Short-Term Borrowings Average Interest Rate	Numeric
IA106	Equity In Net Loss (Earnings) (Statement of Cash Flows)	Numeric
IA107	Sale of Property, Plant, and Equipment (Statement of Cash Flows)	Numeric
IA108	Sale of Common and Preferred Stock (Statement of Cash Flows)	Numeric
IA109	Sale of Investments (Statement of Cash Flows)	Numeric
IA110	Funds from Operations Total (Statement Changes)	Numeric
IA111	Long-Term Debt Issuance (Statement of Cash Flows)	Numeric
IA112	Sources of Funds Total (Statement of Changes)	Numeric
IA113	Increase in Investment (Statement of Cash Flows)	Numeric
IA114	Long-Term Debt Reduction (Statement of Cash Flows)	Numeric
IA115	Purchase of Common and Preferred Stock (Statement of Cash Flows)	Numeric
IA116	Uses of Funds—Total (Statement of Changes)	Numeric
IA117	Sales (Restated)	Numeric
IA118	Income Before Extraordinary Items (Restated)	Numeric
IA119	Earnings Per Share (Basic)—Excluding Extraordinary Items (Restated)	Numeric
IA120	Assets—Total (Restated)	Numeric
IA121	Working Capital (Restated)	Numeric
IA122	Pretax Income (Restated)	Numeric
IA123	Income Before Extraordinary Items (Statement of Cash Flows)	Numeric
IA124	Extraordinary Items & Discontinued Operations (Statement of Cash Flows)	Numeric
IA125	Depreciation and Amortization (Statement of Cash Flows)	Numeric
IA126	Deferred Taxes (Statement of Cash Flows)	Numeric
IA127	Cash Dividends (Statement of Cash Flows)	Numeric
IA128	Capital Expenditures (Statement of Cash Flows)	Numeric
IA129	Acquisitions (Statement of Cash Flows)	Numeric
IA130	Preferred Stock Carrying Value	Numeric
IA131	Cost of Goods Sold (Restated)	Numeric
IA132	Selling, General, and Administrative Expense (Restated)	Numeric
IA133	Depreciation and Amortization Restated	Numeric
IA134	Interest Expenses (Restated)	Numeric
IA135	Income Taxes—Total (Restated)	Numeric
IA136	Extraordinary Items and Discontinued Operations (Restated)	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA137	Earnings Per Share (Basic)—Including Extraordinary Items Re-stated)	Numeric
IA138	Common Shares Used To Calculate Earnings Per Share (Basic) Re-stated	Numeric
IA139	Earnings Per Share (Diluted)—Excluding Extraordinary Items (Re-stated)	Numeric
IA140	Earnings Per Share (Diluted)—Including Extraordinary Items (Re-stated)	Numeric
IA141	Property, Plant, and Equipment—Total Net (Restated)	Numeric
IA142	Long-Term Debt—Total (Restated)	Numeric
IA143	Retained Earnings (Restated)	Numeric
IA144	Stockholders' Equity (Restated)	Numeric
IA145	Capital Expenditures (Restated)	Numeric
IA146	Employees (Restated)	Numeric
IA147	Interest Capitalized	Numeric
IA148	Long-Term Debt Tied to Prime	Numeric
IA149	Auditor/Auditor's Opinion	Numeric
IA150	Foreign Currency Adjustment Income Account	Numeric
IA151	Receivables—Trade	Numeric
IA152	Deferred Charges	Numeric
IA153	Accrued Expense	Numeric
IA154	Debt—Subordinated Convertible	Numeric
IA155	Property, Plant, and Equipment—Buildings (Net)	Numeric
IA156	Property, Plant, and Equipment—Machinery and Equipment (Net)	Numeric
IA157	Property, Plant, and Equipment Natural Resources (Net)	Numeric
IA158	Property, Plant, and Equipment—Land and Improvements (Net)	Numeric
IA159	Property, Plant, and Equipment—Leases (Net)	Numeric
IA160	Prepaid Expense	Numeric
IA161	Income Tax Refund	Numeric
IA162	Cash	Numeric
IA163	Rental Income	Numeric
IA164	Rental Commitments Minimum—Second Year	Numeric
IA165	Rental Commitments Minimum—Third Year	Numeric
IA166	Rental Commitments Minimum—Fourth Year	Numeric
IA167	Rental Commitments Minimum—Fifth Year	Numeric
IA168	Compensating Balance	Numeric
IA169	Earnings Per Share (Diluted)—Including Extraordinary Items	Numeric
IA170	Pretax Income	Numeric
IA171	Common Shares Used to Calculate Earnings Per Share (Diluted)	Numeric
IA172	Net Income (Loss)	Numeric
IA173	Income Taxes—State Current	Numeric
IA174	Depletion Expense (Schedule VI)	Numeric
IA175	Preferred Stock Redeemable	Numeric
IA176	Blank	Numeric
IA177	Net Income (Loss) (Restated)	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA178	Operating Income After Depreciation	Numeric
IA179	Working Capital (Balance Sheet)	Numeric
IA180	Working Capital Change Total (Statement of Changes)	Numeric
IA181	Liabilities—Total	Numeric
IA182	Property, Plant, and Equipment—Beginning Balance (Schedule V)	Numeric
IA183	Accounting Changes Cumulative Effect	Numeric
IA184	Property, Plant, and Equipment Retirements (Schedule V)	Numeric
IA185	Property, Plant, and Equipment—Other Changes (Schedule V)	Numeric
IA186	Inventories—Other	Numeric
IA187	Property, Plant, and Equipment—Ending Balance (Schedule V)	Numeric
IA188	Debt—Senior Convertible	Numeric
IA189	Selling, General, and Administrative Expense	Numeric
IA190	Non-operating Income (Expense)	Numeric
IA191	Common Stock Equivalents—Dollar Savings	Numeric
IA192	Extraordinary Items	Numeric
IA193	Short-Term Investments	Numeric
IA194	Receivables—Current Other	Numeric
IA195	Current Assets—Other Excluding Prepaid Expenses	Numeric
IA196	Depreciation, Depletion and Amortization (Accumulated) (Balance Sheet)	Numeric
IA197	Price—Fiscal Year High	Numeric
IA198	Price—Fiscal Year Low	Numeric
IA199	Price—Fiscal Year Close	Numeric
IA200	Common Shares Reserved for Conversion Convertible Debt	Numeric
IA201	Dividends Per Share by Payable Date	Numeric
IA202	Adjustment Factor (Cumulative) by Payable Date	Numeric
IA203	Common Shares Reserved for Conversion Preferred Stock	Numeric
IA204	Goodwill	Numeric
IA205	Assets—Other Excluding Deferred Charges	Numeric
IA206	Notes Payable	Numeric
IA207	Current Liabilities Other—Excluding Accrued Expenses	Numeric
IA208	Investment Tax Credit (Balance Sheet)	Numeric
IA209	Preferred Stock Nonredeemable	Numeric
IA210	Capital Surplus	Numeric
IA211	Income Taxes—Other	Numeric
IA212	Blank	Numeric
IA213	Sale of Prop, Plnt, & Equip & Sale of Invs Loss(Gain)(Stmt of Csh Flo)	Numeric
IA214	Preferred Stock Convertible	Numeric
IA215	Common Shares Reserved for Conversion Stock Options	Numeric
IA216	Stockholders' Equity Total	Numeric
IA217	Funds from Operations Other (Statement of Cash Flow)	Numeric
IA218	Sources of Funds Other (Statement of Changes)	Numeric
IA219	Uses of Funds—Other (Statement of Changes)	Numeric
IA220	Depreciation (Accumulated) Beginning Balance (Schedule VI)	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA221	Depreciation (Accumulated) Retirements (Schedule VI)	Numeric
IA222	Depreciation (Accumulated)—Other Changes (Schedule VI)	Numeric
IA223	Depreciation (Accumulated)—Ending Balance (Schedule VI)	Numeric
IA224	Non-operating Income (Expense) (Restated)	Numeric
IA225	Minority Interest (Restated)	Numeric
IA226	Treasury Stock (Dollar Amount)—Common	Numeric
IA227	Treasury Stock (Dollar Amount)—Preferred	Numeric
IA228	Currency Translation Rate	Numeric
IA229	Common Shares Reserved for Conversion Warrants and Other	Numeric
IA230	Retained Earnings Cumulative Translation Adjustment	Numeric
IA231	Retained Earnings Other Adjustments	Numeric
IA232	Common Stock—Per Share Carrying Value	Numeric
IA233	Earnings per Share from Operations	Numeric
IA234	ADR Ratio	Numeric
IA235	Common Equity Liquidation Value	Numeric
IA236	Working Capital Change Other—Increase (Decrease) (Stmnt of Changes)	Numeric
IA237	Income Before Extraordinary Items Available for Common	Numeric
IA238	Marketable Securities Adjustment (Balance Sheet)	Numeric
IA239	Interest Capitalized Net Income Effect	Numeric
IA240	Inventories—LIFO Reserve	Numeric
IA241	Debt—Mortgages and Other Secured	Numeric
IA242	Dividends—Preferred In Arrears	Numeric
IA243	Pension Benefits Present Value of Vested	Numeric
IA244	Pension Benefits Present Value of Nonvested	Numeric
IA245	Pension Benefits Net Assets	Numeric
IA246	Pension Discount Rate (Assumed Rate of Return)	Numeric
IA247	Pension Benefits Information Date	Numeric
IA248	Acquisition—Income Contribution	Numeric
IA249	Acquisitions—Sales Contribution	Numeric
IA250	Property, Plant, and Equipment—Other (Net)	Numeric
IA251	Depreciation (Accumulated)—Land and Improvements	Numeric
IA252	Depreciation (Accumulated) Natural Resources	Numeric
IA253	Depreciation (Accumulated) Buildings	Numeric
IA254	Depreciation (Accumulated) Machinery and Equipment	Numeric
IA255	Depreciation (Accumulated)—Leases	Numeric
IA256	Depreciation (Accumulated) Construction in Progress	Numeric
IA257	Depreciation (Accumulated)—Other	Numeric
IA258	Net Income Adjusted for Common Stock Equivalents	Numeric
IA259	Retained Earnings Unadjusted	Numeric
IA260	Property, Plant, and Equipment—Land and Improvements at Cost	Numeric
IA261	Property, Plant, and Equipment—Natural Resources at Cost	Numeric
IA262	Blank	Numeric
IA263	Property, Plant, and Equipment—Buildings at Cost	Numeric
IA264	Property, Plant, and Equipment—Machinery and Equipment at Cost	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA265	Property, Plant, and Equipment—Leases at Cost	Numeric
IA266	Property, Plant, and Equipment Construction in Progress at Cost	Numeric
IA267	Property, Plant, and Equipment—Other at Cost	Numeric
IA268	Debt Unamortized Debt Discount and Other	Numeric
IA269	Deferred Taxes Federal	Numeric
IA270	Deferred Taxes Foreign	Numeric
IA271	Deferred Taxes—State	Numeric
IA272	Pretax Income Domestic	Numeric
IA273	Pretax Income Foreign	Numeric
IA274	Cash & Cash Equivalent Increase (Decrease) (Statement of Cash Flows)	Numeric
IA275	Blank	Numeric
IA276	S&P Major Index Code Historical	Numeric
IA277	S&P Industry Index Code—Historical	Numeric
IA278	Fortune Industry Code Historical	Numeric
IA279	Fortune Rank	Numeric
IA280	S&P Long-Term Domestic Issuer Credit Rating Historical	Numeric
IA281	Blank	Numeric
IA282	S&P Common Stock Ranking	Numeric
IA283	S&P Short-Term Domestic Issuer Credit Rating—Historical	Numeric
IA284	Pension Vested Benefit Obligation	Numeric
IA285	Pension—Accumulated Benefit Obligation	Numeric
IA286	Pension—Projected Benefit Obligation	Numeric
IA287	Pension Plan Assets	Numeric
IA288	Pension—Unrecognized Prior Service Cost	Numeric
IA289	Pension—Other Adjustments	Numeric
IA290	Pension—Prepaid Accrued Cost	Numeric
IA291	Pension Vested Benefit Obligation Underfunded	Numeric
IA292	Periodic Postretirement Benefit Cost Net	Numeric
IA293	Pension—Accumulated Benefit Obligation (Underfunded)	Numeric
IA294	Pension—Projected Benefit Obligation (Underfunded)	Numeric
IA295	Periodic Pension Cost (Net)	Numeric
IA296	Pension Plan Assets (Underfunded)	Numeric
IA297	Pension—Unrecognized Prior Service Cost (Underfunded)	Numeric
IA298	Pension—Additional Minimum Liability	Numeric
IA299	Pension—Other Adjustments (Underfunded)	Numeric
IA300	Pension—Prepaid Accrued Cost (Underfunded)	Numeric
IA301	Changes in Current Debt (Statement of Cash Flows)	Numeric
IA302	Accounts Receivable Decrease (Increase) (Statement of Cash Flows)	Numeric
IA303	Inventory—Decrease (Increase) (Statement of Cash Flows)	Numeric
IA304	Accounts Payable & Accrued Liabilities Inc (Decrease) (St Cash Flows)	Numeric
IA305	Income Taxes—Accrued Increase (Decrease) Statement of Cash Flow	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA306	Blank	Numeric
IA307	Assets and Liabilities Other (Net Change) Statement of Cash Flow	Numeric
IA308	Operating Activities Net Cash Flow Statement of Cash Flow	Numeric
IA309	Short-Term Investments Change (Statement of Cash Flows)	Numeric
IA310	Investing Activities Other (Statement of Cash Flows)	Numeric
IA311	Investing Activities Net Cash Flow (Statement of Cash Flows)	Numeric
IA312	Financing Activities Other (Statement of Cash Flows)	Numeric
IA313	Financing Activities Net Cash Flow (Statement of Cash Flows)	Numeric
IA314	Exchange Rate Effect (Statement of Cash Flows)	Numeric
IA315	Interest Paid—Net (Statement of Cash Flows)	Numeric
IA316	Blank	Numeric
IA317	Income Taxes Paid (Statement of Cash Flows)	Numeric
IA318	Format Code (Statement of Cash Flows)	Numeric
IA319	Dilution Adjustment	Numeric
IA320	S&P Subordinated Debt Rating	Numeric
IA321	Interest Income Total (Financial Services)	Numeric
IA322	Dilution Available Excluding Numeric	
IA323	Earnings per share from Operations (Diluted)	Numeric
IA324	Historical SIC Code	Numeric
IA325	Blank	Numeric
IA326	Blank	Numeric
IA327	Contingent Liabilities Guarantees	Numeric
IA328	Debt—Finance Subsidiary	Numeric
IA329	Debt—Consolidated Subsidiary	Numeric
IA330	Postretirement Benefit Asset (Liability) (Net)	Numeric
IA331	Pension Plans Service Cost	Numeric
IA332	Pension Plans Interest Cost	Numeric
IA333	Pension Plans Return on Plan Assets (Actual)	Numeric
IA334	Pension Plans—Other Periodic Cost Components (Net)	Numeric
IA335	Pension Plans—Rate of Compensation Increase	Numeric
IA336	Pension Plans Anticipated Long-Term Rate of Return on Plan Assets	Numeric
IA337	Risk-Adjusted Capital Ratio—Tier 1	Numeric
IA338	Blank	Numeric
IA339	Interest Expense Total (Financial Services)	Numeric
IA340	Net Interest Income (Tax Equivalent)	Numeric
IA341	Non-performing Assets Total	Numeric
IA342	Provision for Loan/Asset Losses	Numeric
IA343	Reserve for Loan/Asset Losses	Numeric
IA344	Net Interest Margin	Numeric
IA345	Blank	Numeric
IA346	Blank	Numeric
IA347	Blank	Numeric
IA348	Risk-Adjusted Capital Ratio—Total	Numeric
IA349	Net Charge-Offs	Numeric
IA350	Blank	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA351	Current Assets Discontinued Operations	Numeric
IA352	Other Intangibles	Numeric
IA353	Long-Term Assets of Discontinued Operations	Numeric
IA354	Other Current Assets Excluding Discontinued	Numeric
IA355	Other Assets Excluding Discontinued Operations	Numeric
IA356	Deferred Revenue Current	Numeric
IA357	Accumulated Other Comprehensive Income	Numeric
IA358	Deferred Compensation	Numeric
IA359	Other Stockholders' Equity Adjustments	Numeric
IA360	Acquisition/Merger Pretax	Numeric
IA361	Acquisition/Merger After-Tax	Numeric
IA362	Acquisition/Merger Basic EPS Effect	Numeric
IA363	Acquisition/Merger Diluted EPS Effect	Numeric
IA364	Gain/Loss Pretax	Numeric
IA365	Gain/Loss After-Tax	Numeric
IA366	Gain/Loss Basic EPS Effect	Numeric
IA367	Gain/Loss Diluted EPS Effect	Numeric
IA368	Impairments of Goodwill Pretax	Numeric
IA369	Impairments of Goodwill After-Tax	Numeric
IA370	Impairments of Goodwill Basic EPS Effect	Numeric
IA371	Impairments of Goodwill Diluted EPS Effect	Numeric
IA372	Settlement (Litigation /Insurance) Pretax	Numeric
IA373	Settlement (Litigation /Insurance) Aftertax	Numeric
IA374	Settlement (Litigation /Insurance) Basic EPS	Numeric
IA375	Settlement (Litigation /Insurance) Diluted EPS	Numeric
IA376	Restructuring Costs Pretax	Numeric
IA377	Restructuring Costs Aftertax	Numeric
IA378	Restructuring Costs Basic EPS Effect	Numeric
IA379	Restructuring Costs Diluted EPS Effect	Numeric
IA380	Writedowns Pretax	Numeric
IA381	Writedowns After-Tax	Numeric
IA382	Writedowns Basic EPS Effect	Numeric
IA383	Writedowns Diluted EPS Effect	Numeric
IA384	Other Special Items Pretax	Numeric
IA385	Other Special Items Aftertax	Numeric
IA386	Other Special Items Basic EPS Effect	Numeric
IA387	Other Special Items Diluted EPS Effect	Numeric
IA388	In Process Research & Development	Numeric
IA389	Thereafter Rent Commitments	Numeric
IA390	Accumulated Depreciation of Real Estate Property	Numeric
IA391	Total Real Estate Property	Numeric
IA392	Gain/Loss on Sale of Property	Numeric
IA393	Depreciation and Amortization of Property	Numeric
IA394	Goodwill Amortization	Numeric
IA395	See Footnote for 394	Numeric

Table 38.28 *continued*

Fields	Label	Type
IA396	Common Shares Issued	Numeric
IA397	Deferred Revenue Long-Term	Numeric
IA398	Stock Compensation Expense	Numeric
IA399	Implied Option Expense	Numeric
IA400	Blank	Numeric

IQITEMS Data Set—Quarterly Data Items**Table 38.29** IQITEMS Data Set—Quarterly Data Items

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
IQ1	Selling, General, and Administrative Expense	Numeric
IQ2	Sales (Net)	Numeric
IQ3	Minority Interest (Income Account)	Numeric
IQ4	Research and Development Expense	Numeric
IQ5	Depreciation and Amortization (Income Statement)	Numeric
IQ6	Income Taxes—Total	Numeric
IQ7	Earnings Per Share (Diluted)—Including Extraordinary Items	Numeric
IQ8	Income Before Extraordinary Items	Numeric
IQ9	Earnings Per Share (Diluted)—Excluding Extraordinary Items	Numeric
IQ10	Income Before Extraordinary Items—Adj for Com Stk Equiv Dollar Savings	Numeric
IQ11	Earnings Per Share (Basic)—Including Extraordinary Items	Numeric
IQ12	Price—Close 1st Month of Quarter	Numeric
IQ13	Price—Close 2nd Month of Quarter	Numeric
IQ14	Price—Close 3rd Month of Quarter	Numeric
IQ15	Common Shares Used to Calculate Earnings per Share (Basic)	Numeric
IQ16	Dividends per Share by Ex-Date	Numeric
IQ17	Adjustment Factor Cumulative by Ex-Date	Numeric
IQ18	Common Shares Traded	Numeric
IQ19	Earnings Per Share (Basic)—Excluding Extraordinary Items	Numeric
IQ20	Dividends—Common Indicated Annual	Numeric
IQ21	Operating Income Before Depreciation	Numeric
IQ22	Interest Expense	Numeric
IQ23	Pretax Income	Numeric
IQ24	Dividends—Preferred	Numeric
IQ25	Income Before Extraordinary Items Available for Common	Numeric
IQ26	Extraordinary Items and Discontinued Operations	Numeric
IQ27	Earnings Per Share (Basic) Excluding Extraordinary Items 12 Mo Moving	Numeric
IQ28	Common Shares Used to Calculate Earnings Per Share—12 Month Moving	Numeric

Table 38.29 *continued*

Fields	Label	Type
IQ29	Interest Income Total (Financial Services)	Numeric
IQ30	Cost of Goods Sold	Numeric
IQ31	Non-operating Income (Expense)	Numeric
IQ32	Special Items	Numeric
IQ33	Discontinued Operations	Numeric
IQ34	Foreign Currency Adjustment (Income Account)	Numeric
IQ35	Deferred Taxes (Income Account)	Numeric
IQ36	Cash and Short Term Investments	Numeric
IQ37	Receivables—Total	Numeric
IQ38	Inventories—Total	Numeric
IQ39	Current Assets—Other	Numeric
IQ40	Current Assets—Total	Numeric
IQ41	Depreciation, Depletion and Amortization (Accumulated) (Balance Sheet)	Numeric
IQ42	Property, Plant, and Equipment—Total (Net)	Numeric
IQ43	Assets—Other	Numeric
IQ44	Assets—Total/Liabilities and Stockholders Equity-Total	Numeric
IQ45	Debt in Current Liabilities	Numeric
IQ46	Accounts Payable	Numeric
IQ47	Income Taxes Payable	Numeric
IQ48	Current Liabilities Other	Numeric
IQ49	Current Liabilities Total	Numeric
IQ50	Liabilities—Other	Numeric
IQ51	Long-Term Debt—Total	Numeric
IQ52	Deferred Taxes and Investment Tax Credit (Balance Sheet)	Numeric
IQ53	Minority Interest (Balance Sheet)	Numeric
IQ54	Liabilities—Total	Numeric
IQ55	Preferred Stock Carrying Value	Numeric
IQ56	Common Stock	Numeric
IQ57	Capital Surplus	Numeric
IQ58	Retained Earnings	Numeric
IQ59	Common Equity—Total	Numeric
IQ60	Stockholders' Equity Total	Numeric
IQ61	Common Shares Outstanding	Numeric
IQ62	Invested Capital Total	Numeric
IQ63	Price—High 1st Month of Quarter	Numeric
IQ64	Price—High 2nd Month of Quarter	Numeric
IQ65	Price—High 3rd Month of Quarter	Numeric
IQ66	Price—Low 1st Month of Quarter	Numeric
IQ67	Price—Low 2nd Month of Quarter	Numeric
IQ68	Price—Low 3rd Month of Quarter	Numeric
IQ69	Net Income (Loss)	Numeric
IQ70	Interest Expense Total (Financial Services)	Numeric
IQ71	Preferred Stock Redeemable	Numeric
IQ72	Dividends per Share by Payable Date	Numeric

Table 38.29 *continued*

Fields	Label	Type
IQ73	Working Capital Change Other—Increase (Decrease) (Stmnt of Changes)	Numeric
IQ74	Cash & Cash Equivalents Increase (Decrease) (Statement of Cash Flows)	Numeric
IQ75	Changes in Current Deb (Statement of Cash Flows)	Numeric
IQ76	Income Before Extraordinary Items (Statement of Cash Flows)	Numeric
IQ77	Depreciation and Amortization (Statement of Cash Flows)	Numeric
IQ78	Extraordinary Items & Discontinued Operation (Statement of Cash Flows)	Numeric
IQ79	Deferred Taxes (Statement of Cash Flows)	Numeric
IQ80	Equity in Net Loss (Earnings) (Statement of Cash Flows)	Numeric
IQ81	Funds from Operations Other (Statement of Cash Flows)	Numeric
IQ82	Funds from Operation Total (Statement of Charges)	Numeric
IQ83	Sale of Property, Plant and Equipment (Statement of Cash Flows)	Numeric
IQ84	Sale of Common and Preferred Stock (Statement of Cash Flows)	Numeric
IQ85	Sale of Investments (Statement of Cash Flows)	Numeric
IQ86	Long-Term Debt Issuance (Statement of Cash Flows)	Numeric
IQ87	Sources of Funds Other (Statement of Changes)	Numeric
IQ88	Sources of Funds Total (Statement of Changes)	Numeric
IQ89	Cash Dividends (Statement of Cash Flows)	Numeric
IQ90	Capital Expenditures (Statement of Cash Flows)	Numeric
IQ91	Increase in Investment (Statement of Cash Flows)	Numeric
IQ92	Long-Term Debt Reduction (Statement of Cash Flows)	Numeric
IQ93	Purchase of Common and Preferred Stock (Statement of Cash Flows)	Numeric
IQ94	Acquisitions (Statement of Cash Flows)	Numeric
IQ95	Uses of Funds—Other (Statement of Changes)	Numeric
IQ96	Uses of Funds—Total (Statement of Changes)	Numeric
IQ97	Net Interest Income (Tax Equivalent)	Numeric
IQ98	Treasury Stock Total Dollar Amount	Numeric
IQ99	Non-Performing Assets Total	Numeric
IQ100	Adjustment Factor (Cumulative) by Payable Date	Numeric
IQ101	Working Capital Change Total (Statement of Changes)	Numeric
IQ102	Sale of Prop, Plnt, & Equip & Sale of Invs Loss(Gain) (Stmnt of Csh Flo)	Numeric
IQ103	Accounts Receivable Decrease (Increase) (Statement of Cash Flows)	Numeric
IQ104	Inventory—Decrease (Increase) (Statement of Cash Flows)	Numeric
IQ105	Accounts Payable & Accrued Liabilities Inc (Decrease) (St Cash Flows)	Numeric
IQ106	Income Taxes—Accrued Increase (Decrease) (Statement of Cash Flows)	Numeric
IQ107	Assets and Liabilities Other (Net Change) (Statement of Cash Flows)	Numeric
IQ108	Operating Activities Net Cash Flow (Statement of Cash Flows)	Numeric

Table 38.29 *continued*

Fields	Label	Type
IQ109	Short-Term Investments Change (Statement of Cash Flows)	Numeric
IQ110	Investing Activities Other (Statement of Cash Flows)	Numeric
IQ111	Investing Activities Net Cash Flow (Statement of Cash Flows)	Numeric
IQ112	Financing Activities Other (Statement of Cash Flows)	Numeric
IQ113	Financing Activities Net Cash Flow (Statement of Cash Flows)	Numeric
IQ114	Exchange Rate Effect (Statement of Cash Flows)	Numeric
IQ115	Interest Paid—Net (Statement of Cash Flows)	Numeric
IQ116	Income Taxes Paid (Statement of Cash Flows)	Numeric
IQ117	Accounting Changes Cumulative Effect	Numeric
IQ118	Property, Plant and Equipment—Total (Gross)	Numeric
IQ119	Extraordinary Items	Numeric
IQ120	Common Stock Equivalents Dollar Savings	Numeric
IQ121	Currency Translation Rate	Numeric
IQ122	Accounts Payable Expanded	Numeric
IQ123	Blank	Numeric
IQ124	Common Shares for Diluted EPS	Numeric
IQ125	Dilution Adjustment	Numeric
IQ126	Dilution Available Excluding	Numeric
IQ127..IQ170	Blank	Numeric
IQ171	Provision for Loan/Asset Losses	Numeric
IQ172	Reserve for Loan/Asset Losses	Numeric
IQ173	Net Interest Margin	Numeric
IQ174	Risk-Adjusted Capital Ratio—Tier 1	Numeric
IQ175	Risk-Adjusted Capital Ratio—Total	Numeric
IQ176	Net Charge-Offs	Numeric
IQ177	Earnings per Share from Operations	Numeric
IQ178	Earnings per Share from Operations	Numeric
IQ179	Earnings per Share (Diluted)—Excluding Extraordinary Items 12 Mo Mov	Numeric
IQ180	Earnings per Share from Operations (Diluted) 12 Months Moving	Numeric
IQ181	Earnings per Share from Operations (Diluted)	Numeric
IQ182..IQ232	Blank	Numeric
IQ233	Total Long-Term Investments	Numeric
IQ234	Goodwill	Numeric
IQ235	Other Intangibles	Numeric
IQ236	Other Long-Term Assets	Numeric
IQ237	Unadjusted Retained Earnings	Numeric
IQ238	Accumulated Other Comprehensive Income	Numeric
IQ239	Deferred Compensation	Numeric
IQ240	Other Stockholders' Equity Adjustments	Numeric
IQ241	Acquisition/Merger Pretax	Numeric
IQ242	Acquisition/Merger After-Tax	Numeric
IQ243	Acquisition/Merger Basic EPS Effect	Numeric
IQ244	Acquisition/Merger Diluted EPS Effect	Numeric
IQ245	Gain/Loss Pretax	Numeric

Table 38.29 *continued*

Fields	Label	Type
IQ246	Gain/Loss After-Tax	Numeric
IQ247	Gain/Loss Diluted EPS Effect	Numeric
IQ248	Gain/Loss Basic EPS Effect	Numeric
IQ249	Impairments of Goodwill Pretax	Numeric
IQ250	Impairments of Goodwill After-Tax	Numeric
IQ251	Impairments of Goodwill Basic EPS Effect	Numeric
IQ252	Impairments of Goodwill Diluted EPS Effect	Numeric
IQ253	Settlement (Litigation/Insurance) Pretax	Numeric
IQ254	Settlement (Litigation/Insurance) Aftertax	Numeric
IQ255	Settlement (Litigation/Insurance) Basic EPS	Numeric
IQ256	Settlement (Litigation/Insurance)Diluted EP	Numeric
IQ257	Restructuring Costs Pretax	Numeric
IQ258	Restructuring Costs Aftertax	Numeric
IQ259	Restructuring Costs Basic EPS Effect	Numeric
IQ260	Restructuring Costs Diluted EPS Effect	Numeric
IQ261	Writedowns Pretax	Numeric
IQ262	Writedowns After-Tax	Numeric
IQ263	Writedowns Basic EPS Effect	Numeric
IQ264	Writedowns Diluted EPS Effect	Numeric
IQ265	Other Special Items Pretax	Numeric
IQ266	Other Special Items Aftertax	Numeric
IQ267	Other Special Items Basic EPS Effect	Numeric
IQ268	Other Special Items Diluted EPS Effect	Numeric
IQ269	Accumulated Depreciation of Real Estate Property	Numeric
IQ270	Total Real Estate Property	Numeric
IQ271	Gain/Loss on Sale of Property	Numeric
IQ272	Depreciation and Amortization of Property	Numeric
IQ273	ADR Ratio	Numeric
IQ274	In Process Research & Development	Numeric
IQ275	Goodwill Amortization	Numeric
IQ276	See Footnote for 275	Numeric
IQ277	Common Shares Issued	Numeric
IQ278	Stock Compensation Expense	Numeric
IQ279	Blank	Numeric
IQ280	Blank	Numeric

BAITEMS Data Set—Bank Annual Data Items**Table 38.30** BAITEMS Data Set—Bank Annual Data Items

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
BA1	Cash and Due from Bank	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA2	U.S. Treasury Securities	Numeric
BA3	Securities of Other U.S. Government Agencies and Corporations	Numeric
BA4	Due from Banks (Memorandum Entry)	Numeric
BA5	Other Securities (Taxable)	Numeric
BA6	Total Taxable Investment Securities	Numeric
BA7	Obligations of States and Political Subdivisions	Numeric
BA8	Total Investment Securities	Numeric
BA9	Geographic Designation Code	Numeric
BA10	Trading Account Securities	Numeric
BA11	Federal Funds Sold and Securities Purchased under Agreements to Resell	Numeric
BA12	Treasury Stock—Dollar Amount—Common	Numeric
BA13	Foreign Loans	Numeric
BA14	Real Estate Loans Total	Numeric
BA15	Real Estate Loans Insured or Guaranteed by U.S. Government	Numeric
BA16	Treasury Stock Dollar Amount Preferred	Numeric
BA17	Loans to Financial Institutions	Numeric
BA18	Loans for Purchasing or Carrying Securities	Numeric
BA19	Interest Income Total (Financial Services)	Numeric
BA20	Commercial or Industrial Loans	Numeric
BA21	Loans to Individuals for Household, Family, Other Consumer Expenditures	Numeric
BA22	Other Loans	Numeric
BA23	Loans (Gross)	Numeric
BA24	Unearned Discount/	Numeric
BA25	Income Interest on Due from Banks (Restated)	Numeric
BA26	Interest Income on Fed Funds Sold & Secs Purchased under Agmtnt to Resell	Numeric
BA27	Other Interest Income (Restated)	Numeric
BA28	Bank Premises, Furniture, and Fixture	Numeric
BA29	Real Estate Other than Bank Premises	Numeric
BA30	Investments in Nonconsolidated Subsidiaries	Numeric
BA31	Direct Lease Financing	Numeric
BA32	Customers' Liability to this Bank on Acceptances Outstanding	Numeric
BA33	Other Assets	Numeric
BA34	Intangible Assets	Numeric
BA35	Aggregate Miscellaneous Assets	Numeric
BA36	Total Assets (Gross)	Numeric
BA37	Trading Account Income (Restated)	Numeric
BA38	Other Current Operating Revenue (Restated)	Numeric
BA39	Interest Expense on Fed Funds Purch'd & Secs Sold under Agmnts to Repur	Numeric
BA40	Assets Held for Sale	Numeric
BA41	Total Demand Deposits	Numeric
BA42	Net Interest Margin	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA43	Consumer Type Time Deposit	Numeric
BA44	Total Savings Deposits	Numeric
BA45	Money Market Certificates of Deposit	Numeric
BA46	All Other Time Deposit	Numeric
BA47	Total Time Deposits (Other than Savings)	Numeric
BA48	Risk-Adjusted Capital Ratio - Tier 1	Numeric
BA49	Interest on Long-Term Debt and Not Classified as Capital (Restated)	Numeric
BA50	Interest on Other Borrowed Money (Restated)	Numeric
BA51	Other Interest Expense (Restated)	Numeric
BA52	Salaries and Related Expenses (Restated)	Numeric
BA53	Total Deposits Worldwide	Numeric
BA54	Total Domestic Deposits	Numeric
BA55	Total Foreign Deposits	Numeric
BA56	Demand Deposits of IPC	Numeric
BA57	Time and Savings Deposits of IPC	Numeric
BA58	Deposits of U.S. Government	Numeric
BA59	Deposits of States and Political Subdivisions	Numeric
BA60	Deposits of Foreign Governments	Numeric
BA61	Deposits of Commercial Banks	Numeric
BA62	Certified and Officers Checks	Numeric
BA63	Other Deposits	Numeric
BA64	Risk-Adjusted Capital Ratio—Total	Numeric
BA65	Federal Funds Purchased & Securities Sold under Agreements to Repurchase	Numeric
BA66	Commercial Paper	Numeric
BA67	Long-Term Debt Not Classified as Capital	Numeric
BA68	Other Liabilities for Borrowed Money	Numeric
BA69	Total Borrowings	Numeric
BA70	Valuation Portion of Reserve for Loan Losses	Numeric
BA71	Mortgage Indebtedness	Numeric
BA72	Acceptances Executed by or for the Account of this Bank and Outstanding	Numeric
BA73	Other Liabilities (Excluding Valuation Reserves)	Numeric
BA74	Deferred Portion of Reserve for Loan Losses	Numeric
BA75	Contingency Portion of Reserve for Loan Losses	Numeric
BA76	Total Liabilities (Excluding Valuation Reserves)	Numeric
BA77	Minority Interest in Consolidated Subsidiaries	Numeric
BA78	Reserve(s) for Bad Debt Losses on Loans	Numeric
BA79	Depreciation and Amortization	Numeric
BA80	Reserves on Securities	Numeric
BA81	Total Reserves on Loan and Securities	Numeric
BA82	Fixed Expense (Occupancy and Equipment - Net)(Restated)	Numeric
BA83	Other Current Operating Expense(Restated)	Numeric
BA84	Capital Notes and Debentures	Numeric
BA85	Minority Interest (Income Account)(Restated)	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA86	Preferred Stock Par Value	Numeric
BA87	Number of Shares of Preferred Stock Outstanding	Numeric
BA88	Common Stock Par Value	Numeric
BA89	Number of Shares Authorized	Numeric
BA90	Number of Shares Outstanding	Numeric
BA91	Number of Shares Reserved for Conversion	Numeric
BA92	Treasury Stock—Cost	Numeric
BA93	Number of Treasury Shares Held	Numeric
BA94	Special Items	Numeric
BA95	Surplus	Numeric
BA96	Undivided Profits	Numeric
BA97	Reserves for Contingencies and Other Capital Reserves	Numeric
BA98	Total Extraordinary Items—Net of Taxes (Restated)	Numeric
BA99	Total Book Value	Numeric
BA100	Net Income Per Share Excluding Extraordinary Items (Restated)	Numeric
BA101	Total Liabilities, Reserves and Capital Accounts	Numeric
BA102	Total Capital Accounts and Minority Interest (Invested Capital)	Numeric
BA103	Net Current Op Erngs Per Share—Excluding Extraordinary Items Fully	Numeric
BA104	Foreign Exchange Gains and Losses	Numeric
BA105	Interest and Fees on Loans	Numeric
BA106	Interest Inc on Federal Funds Sold & Secs Purchased und Agmnts to Resell	Numeric
BA107	Blank	Numeric
BA108	Interest and Discount on U.S. Treasury Securities	Numeric
BA109	Interest on Securities of U.S. Government Agencies and Corporations	Numeric
BA110	Interest and Dividends on Other Taxable Securities	Numeric
BA111	Total Taxable Investment Revenue	Numeric
BA112	Interest on Obligation of States & Political Subdivisions	Numeric
BA113	Other Interest Income	Numeric
BA114	Trading Account Interest (Memorandum Entry)	Numeric
BA115	Total Interest and Dividends on Investment	Numeric
BA116	Aggregate Loan and Investment Revenue	Numeric
BA117	Trust Department Income	Numeric
BA118	Service Charges on Deposit Accounts	Numeric
BA119	Other Svce Charges, Collection & Exchange Charges, Comms & Fees	Numeric
BA120	Trading Account Income	Numeric
BA121	Other Current Operating Revenue	Numeric
BA122	Interest on Due from Banks	Numeric
BA123	Aggregate Other Current Operating Revenue	Numeric
BA124	Total Current Operating Revenue	Numeric
BA125	Number of Employees	Numeric
BA126	Salaries and Wages of Officers and Employees	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA127	Pension and Employee Benefits	Numeric
BA128	Average Fed Funds Purch'd & Securities Sold under Agmnts to Re-purchase	Numeric
BA129	Interest on Deposits	Numeric
BA130	Interest Exp on Fed Fnds Purch'd & Securities Sold under Agmnts to Repur	Numeric
BA131	Interest on Borrowed Money	Numeric
BA132	Interest on Long-Term Debt—Not Classified as Capital	Numeric
BA133	Total Interest on Deposits and Borrowing	Numeric
BA134	Interest on Capital Notes and Debentures	Numeric
BA135	Provision for Loan Losses	Numeric
BA136	Occupancy Expense of Bank Premises—Net	Numeric
BA137	Total Interest Expense	Numeric
BA138	Rental Income	Numeric
BA139	Furniture and Equipment Depreciation, Rental Cost, Servicing, Etc.	Numeric
BA140	Number of Employees(Restated)	Numeric
BA141	Number of Domestic Officers (Restated)	Numeric
BA142	Other Current Operating Expense	Numeric
BA143	Aggregate Other Current Operating Expense	Numeric
BA144	Total Current Operating Expense	Numeric
BA145	Current Operating Earnings before Income Tax	Numeric
BA146	Income Taxes Applicable to Current Operating Earnings	Numeric
BA147	Net Current Operating Earnings	Numeric
BA148	Minority Interest (Income Account)	Numeric
BA149	Net Current Operating Earnings after Minority Interest	Numeric
BA150	Average Cash and Due from Banks (Restated)	Numeric
BA151	Average Loans Domestic (Restated)	Numeric
BA152	Average Loans Foreign (Restated)	Numeric
BA153	Net Pre-Tax Profit or Loss on Securities Sold or Redeemed	Numeric
BA154	Average Fed Fnds Sold & Secs Purchased under Agmnts to Resell (Rest)	Numeric
BA155	Average Trading Account Securities(Restated)	Numeric
BA156	Average Deposits(Restated)	Numeric
BA157	Tax Effect on Profit or Loss on Securities Sold or Redeemed	Numeric
BA158	Net Aft-Tax Profit/Loss on Secs Sld or Redmd Prior to Eff of Min Int	Numeric
BA159	Minority Interest in Aft-Tax Profit/Loss on Securities Sold or Redeemed	Numeric
BA160	Net After-Tax & Aft-Min Int Profit/Loss on Secs Sld or Redeemed	Numeric
BA161	Net Income	Numeric
BA162	Preferred Dividend Deductions	Numeric
BA163	Savings Due to Common Stock Equivalents	Numeric
BA164	Net Income Available for Common	Numeric
BA165	Net Current Operating Earnings Available for Common	Numeric
BA166	Interest and Fees on Loans (Restated)	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA167	Taxable Investment Income (Restated)	Numeric
BA168	Non-Taxable Investment Income (Restated)	Numeric
BA169	Total Interest Income (Restated)	Numeric
BA170	Trust Department Income (Restated)	Numeric
BA171	Total Current Operating Revenue (Restated)	Numeric
BA172	Interest on Deposits (Restated)	Numeric
BA173	Total Interest on Deposits and Borrowing (Restated)	Numeric
BA174	Interest on Capital Notes and Debentures (Restated)	Numeric
BA175	Total Interest Expense (Restated)	Numeric
BA176	Provision for Loan Losses (Restated)	Numeric
BA177	Cash Dividends Declared on Common Stock	Numeric
BA178	Cash Dividends Declared on Preferred Stock	Numeric
BA179	Total Current Operating Expense (Restated)	Numeric
BA180	Current Operating Earnings before Income Tax (Restated)	Numeric
BA181	Income Taxes Applicable to Current Operating Earnings (Restated)	Numeric
BA182	Net After-Tax & Aft-Min Int Profit/Loss on Secs Sld/Redeemed (Rest)	Numeric
BA183	Net Income (Restated)	Numeric
BA184	Net Current Operating Earnings Per Share (Restated)	Numeric
BA185	Total Extraordinary Items Net of Taxes	Numeric
BA186	Common Shares Used in Calculating Earnings Per Shares (Restated)	Numeric
BA187	Additions to Reserves for Bad Debts Due to Mergers and Absorptions	Numeric
BA188	Additions to Reserves for Bad Debts Due to Recoveries Credit'd to Rsrvs	Numeric
BA189	Deductions from Reserves for Bad Debts Due to Losses Charged to Reserves	Numeric
BA190	Net Credit/Charge to Reserves for Bad Debts from Loan Recs or Chg-offs	Numeric
BA191	Transfers to Reserves for Bad Debts from Inc and/or to/from Undiv Prfts	Numeric
BA192	Average Preferred Stoc Par Value (Restated)	Numeric
BA193	Net Current Operating Earnings Per Share Excluding Extraordinary Items	Numeric
BA194	Net Income per Share Excluding Extraordinary Items	Numeric
BA195	Net Income per Share Including Extraordinary Items	Numeric
BA196	Common Shares Used in Calculating Earnings per Share	Numeric
BA197	Net Cur Op Earnings per Shares - Exc Extraordinary Items & Fully Diluted	Numeric
BA198	Net Income per Share Excluding Extraordinary Items—Fully Diluted	Numeric
BA199	Net Income per Share Including Extraordinary Items—Fully Diluted	Numeric
BA200	Common Shares Used in Calculating Fully Diluted Earnings per Share	Numeric
BA201	Common Dividends Paid per Share by Ex-Date	Numeric

Table 38.30 *continued*

Fields	Label	Type
BA202	Annualized Dividend Rate	Numeric
BA203	Market Price—High	Numeric
BA204	Market Price—Low	Numeric
BA205	Market Price—Close	Numeric
BA206	Common Shares Traded	Numeric
BA207	Average Reserve for Bad Debt Losses on Loans(Restated)	Numeric
BA208	Number of Domestic Offices	Numeric
BA209	Number of Foreign Offices	Numeric
BA210	Average Loans(Restated)	Numeric
BA211	Average Assets (Gross)	Numeric
BA212	Average Loans (Gross)	Numeric
BA213	Average Cash and Due from Banks	Numeric
BA214	Average Taxable Investments	Numeric
BA215	Average Non-Taxable Investments	Numeric
BA216	Average Deposits	Numeric
BA217	Average Deposits Time and Savings	Numeric
BA218	Average Deposits Demand	Numeric
BA219	Average Borrowings	Numeric
BA220	Average Fed Funds Sold & Secs Purchased under Agrmnts to Resell	Numeric
BA221	Average Book Value	Numeric
BA222	Average Fed Funds Purch'd & Secs Sold under Agmnts to Repurchase	Numeric
BA223	Average Taxable Investments (Restated)	Numeric
BA224	Average Nontaxable Investments	Numeric
BA225	Average Assets(Restated)	Numeric
BA226	Average Deposits Time and Savings(Restated)	Numeric
BA227	Average Deposits Demand (Restated)	Numeric
BA228	Average Deposits Foreign (Restated)	Numeric
BA229	Average Borrowings (Restated)	Numeric
BA230	Average Long-Term Debt (Restated)	Numeric
BA231	Average Book Value (Restated)	Numeric
BA232	Adjustment Factor Cumulative by Ex-Date	Numeric

BQITEMS Data Set—Bank Quarterly Data Items**Table 38.31** BQITEMS Data Set—Bank Quarterly Data Items

Fields	Label	Type
GVKEY	GVKEY	Numeric
CRSPDT	CRSP Date	Numeric
RCALDT	Raw Calendar Trading Date	Numeric
FISCALDT	Fiscal Trading Date	Numeric
BQ1	Cash and Due from Banks	Numeric
BQ2	U.S. Treasury Securities	Numeric
BQ3	Securities of Other U.S. Government Agencies and C	Numeric

Table 38.31 *continued*

Fields	Label	Type
BQ4	Due from Banks (Memorandum Entry)	Numeric
BQ5	Other Securities (Taxable)	Numeric
BQ6	Total Taxable Investment Securities	Numeric
BQ7	Obligations of States and Political Subdivisions	Numeric
BQ8	Total Investment Securities	Numeric
BQ9	Geographic Designation Code	Numeric
BQ10	Trading Account Securities	Numeric
BQ11	Federal Funds Sold & Secs Purch'd under Agrmnts to	Numeric
BQ12	S&P Senior Debt Rating	Numeric
BQ13	Unearned Discount/Income	Numeric
BQ14	Loans (Gross)	Numeric
BQ15	Treasury Stock Dollar Amount—Common	Numeric
BQ16	Treasury Stock—Dollar Amount—Preferred	Numeric
BQ17	Interest Income Total (Financial Services)	Numeric
BQ18	Assets Held for Sale	Numeric
BQ19	Bank Premises, Furniture, and Fixtures	Numeric
BQ20	Real Estate Other than Bank Premises	Numeric
BQ21	Investments in Nonconsolidated Subsidiaries	Numeric
BQ22	Direct Lease Financing	Numeric
BQ23	Customer's Liability to this Bank on Acceptances	Numeric
BQ24	Other Assets	Numeric
BQ25	Intangible Assets	Numeric
BQ26	Aggregate Miscellaneous Assets	Numeric
BQ27	Total Assets (Gross)	Numeric
BQ28	Net Interest Margin	Numeric
BQ29	Risk-Adjusted Capital Ratio—Tier 1	Numeric
BQ30	Total Demand Deposits	Numeric
BQ31	Average Investments	Numeric
BQ32	Average Loans (Gross)	Numeric
BQ33	Total Savings Deposits	Numeric
BQ34	Average Assets (Gross)	Numeric
BQ35	Average Deposits Demand	Numeric
BQ36	Total Time Deposits (Other than Savings)	Numeric
BQ37	Average Deposits Time and Savings	Numeric
BQ38	Average Deposits	Numeric
BQ39	Average Deposits Foreign	Numeric
BQ40	Average Borrowings	Numeric
BQ41	Average Total Stockholders' Equity	Numeric
BQ42	Total Deposits Worldwide	Numeric
BQ43	Total Domestic Deposit	Numeric
BQ44	Total Foreign Deposits	Numeric
BQ45	Risk-Adjusted Capital Ratio—Total	Numeric
BQ46	Federal Funds Purchased & Secs Sold under Agrmnts	Numeric
BQ47	Commercial Paper	Numeric
BQ48	Long-Term Debt—Not Classified as Capital	Numeric

Table 38.31 *continued*

Fields	Label	Type
BQ49	Other Liabilities for Borrowed Money	Numeric
BQ50	Total Borrowings	Numeric
BQ51	Depreciation and Amortization	Numeric
BQ52	Mortgage Indebtedness	Numeric
BQ53	Acceptances Executed by or for Account of this Ban	Numeric
BQ54	Other Liabilities (Excluding Valuation Reserves)	Numeric
BQ55	Special Items	Numeric
BQ56	Blank	Numeric
BQ57	Total Liabilities (Excluding Valuation Reserves)	Numeric
BQ58	Minority Interest in Consolidated Subsidiaries	Numeric
BQ59	Reserve(s) for Bad Debt Losses on Loans	Numeric
BQ60	Valuation Portion of Reserves for Loan Losses	Numeric
BQ61	Deferred Portion of Reserve for Loan Losses	Numeric
BQ62	Contingency Portion of Reserve for Loan Losses	Numeric
BQ63	Blank	Numeric
BQ64	Capital Notes and Debentures	Numeric
BQ65	Blank	Numeric
BQ66	Preferred Stock Par Value	Numeric
BQ67	Common Stock Par Value	Numeric
BQ68	Number of Shares Outstanding	Numeric
BQ69	Surplus	Numeric
BQ70	Undivided Profits	Numeric
BQ71	Reserves for Contingencies & Other Capital Reserve	Numeric
BQ72	Blank	Numeric
BQ73	Total Book Value	Numeric
BQ74	Blank	Numeric
BQ75	Total Liabilities, Reserves and Capital Accounts	Numeric
BQ76	Total Capital Accounts and Minority Interest (Invested Capital)	Numeric
BQ77	Report Date of Quarterly Earnings Per Share	Numeric
BQ78	Interest and Fees on Loans	Numeric
BQ79	Interest Inc on Fed Funds Sld & Secs Purchased under Agrmnts to Resell	Numeric
BQ80	Blank	Numeric
BQ81	Interest and Discount on U.S. Treasury Securities	Numeric
BQ82	Interest on Securities of U.S. Government Agencies	Numeric
BQ83	Interest and Dividends on Other Taxable Securities	Numeric
BQ84	Total Taxable Investment Revenue	Numeric
BQ85	Interest on Obligation of States and Political Subdivisions	Numeric
BQ86	Foreign Exchange Gains and Losses	Numeric
BQ87	Total Interest and Dividends on Investments	Numeric
BQ88	Other Interest Income	Numeric
BQ89	Trust Department Income	Numeric
BQ90	Service Charges on Deposit Accounts	Numeric
BQ91	Other Svce Charges, Collections & Exchange Charges	Numeric
BQ92	Trading Account Income	Numeric

Table 38.31 *continued*

Fields	Label	Type
BQ93	Other Current Operating Revenue	Numeric
BQ94	Interest on Due from Banks	Numeric
BQ95	Aggregate Other Current Operating Revenue	Numeric
BQ96	Total Current Operating Revenue	Numeric
BQ97	Salaries and Wages of Officers and Employees	Numeric
BQ98	Pension and Employee Benefits	Numeric
BQ99	Blank	Numeric
BQ100	Interest on Deposits	Numeric
BQ101	Interest Expense on Fed Funds Purchased & Secs Sld	Numeric
BQ102	Interest on Other Borrowed Money	Numeric
BQ103	Interest on Long-Term Debt—Not Classified as Cap	Numeric
BQ104	Total Interest Expense	Numeric
BQ105	Interest on Capital Notes and Debentures	Numeric
BQ106	Provision for Loan Losses	Numeric
BQ107	Occupancy Expense of Bank Premises—Net	Numeric
BQ108	Furniture and Equipment:Depreciation Rental, Costs, Servicing, Etc.	Numeric
BQ109	Blank	Numeric
BQ110	Other Current Operating Expense	Numeric
BQ111	Aggregate Other Current Operating Expense	Numeric
BQ112	Total Current Operating Expense	Numeric
BQ113	Current Operating Earnings before Income Tax	Numeric
BQ114	Income Taxes Applicable to Current Operating Earnings	Numeric
BQ115	Net Current Operating Earnings	Numeric
BQ116	Minority Interest (Income Account)	Numeric
BQ117	Net Current Operating Earnings after Minority Interest	Numeric
BQ118	Net Pre-Tax Profit or Loss on Securities Sold or Redeemed	Numeric
BQ119	Blank	Numeric
BQ120	Blank	Numeric
BQ121	Tax Effect on Profit or Loss on Securities Sold or Redeemed	Numeric
BQ122	Minority Interest in After-Tax Profit or Loss on Sec sold or Re- deemed	Numeric
BQ123	Net After-Tax & After-Min Int Profit or Loss on Secs Sld or Re- deemed	Numeric
BQ124	Net Income	Numeric
BQ125	Preferred Dividend Deductions	Numeric
BQ126	Savings Due to Common Stock Equivalents	Numeric
BQ127	Net Income Available for Common	Numeric
BQ128	Net Current Operating Earnings Available for Common	Numeric
BQ129	Cash Dividends Declared on Common Stock	Numeric
BQ130	Cash Dividends Declared on Preferred Stock	Numeric
BQ131	Net After-Tax Transfers bet Undivided Profits & Valuation Reserves	Numeric
BQ132	Total Extraordinary Items Net of Taxes	Numeric
BQ133	Net Credit or Charge to Reserves for Bad Debts for Loan Recs or Crg-Offs	Numeric

Table 38.31 *continued*

Fields	Label	Type
BQ134	Blank	Numeric
BQ135	Common Dividends Paid per Share by Payable Date	Numeric
BQ136	Adjustment Factor Cumulative by Payable Date	Numeric
BQ137	Net Current Operating Earnings per Share Excluding Extraordinary Items	Numeric
BQ138	Net Income per Share Excluding Extraordinary Items	Numeric
BQ139	Net Income per Share Including Extraordinary Items	Numeric
BQ140	Common Shares Used in Calculating Quarterly Earnings per Share	Numeric
BQ141	Net Cur Op Erns per Share—Excluding Extraordinary Items 12 Mo Moving	Numeric
BQ142	Net Income per Share Excluding Extraordinary Items 12 Mo Moving	Numeric
BQ143	Net Income per Share Including Extraordinary Items 12 Mo Moving	Numeric
BQ144	Common Shares Used in Calculating 12 Mo Moving Earnings per Share	Numeric
BQ145	Net Current Op Earngs per Share—Extraordinary	Numeric
BQ146	Net Income per Share Excluding Extraordinary Items Fully Diluted	Numeric
BQ147	Net Income per Share Including Extraordinary Items Fully Diluted	Numeric
BQ148	Common Shares Used in Calculating Quartly Fully Diluted Earnings per Shr	Numeric
BQ149	Net Cur Op Erngs/Share Ex Extrd Items Fully Diluted 12 Mo Mov	Numeric
BQ150	Net Inc/Share Excldg Extraordinary Items—Fully	Numeric
BQ151	Net Inc per Share Inc Extraordinary Items—Fully Diluted—12 Mo Mov	Numeric
BQ152	Common Shrs Used in Calc 12 Mo Moving Fully Diluted 12 Mo Mov	Numeric
BQ153	Market Price 1st Month of Quarter High	Numeric
BQ154	Market Price 1st Month of Quarter Low	Numeric
BQ155	Market Price 1st Month of Quarter Close	Numeric
BQ156	Market Price 2nd Month of quarter High	Numeric
BQ157	Market Price 2nd Month of Quarter Low	Numeric
BQ158	Market Price 2nd Month of Quarter Close	Numeric
BQ159	Market Price 3rd Month of quarter High	Numeric
BQ160	Market Price 3rd Month of Quarter Low	Numeric
BQ161	Market Price 3rd Month of Quarter Close	Numeric
BQ162	Common Dividends Paid per Share by Ex-Date	Numeric
BQ163	Annualized Dividend Rate	Numeric
BQ164	Common Shares Traded (Quarterly)	Numeric
BQ165	Adjustment Factor Cumulative by Ex-Date	Numeric

Time Series Data Sets

Table 38.32 Time Series Data Sets

Data Set	Fields	Label	Type
PRCH	GVKEY	GVKEY	Numeric

Table 38.32 *continued*

Data Set	Fields	Label	Type
High Price	CALDT	Calendar Trading Date	Numeric
Time Series	PRCH	High Price	Numeric
PRCL	GVKEY	GVKEY	Numeric
Low Price	CALDT	Calendar Trading Date	Numeric
Time Series	PRCL	Low Price	Numeric
PRCC	GVKEY	GVKEY	Numeric
Closing Price	CALDT	Calendar Trading Date	Numeric
Time Series	PRCC	Closing Price	Numeric
DIV	GVKEY	GVKEY	Numeric
Dividends Per Share	CALDT	Calendar Trading Date	Numeric
Time Series	DIV	Dividends Per share	Numeric
ERN	GVKEY	GVKEY	Numeric
Earnings Per Share	CALDT	Calendar Trading Date	Numeric
Time Series	ERN	Earnings Per Share	Numeric
SHSTRD	GVKEY	GVKEY	Numeric
Shares Traded	CALDT	Calendar Trading Date	Numeric
Time Series	SHSTRD	Shares Traded	Numeric
DIVRTE	GVKEY	GVKEY	Numeric
Annualized Dividend	CALDT	Calendar Trading Date	Numeric
Rate Time Series	DIVRTE	Annual'd Dividend Rate	Numeric
RAWADJ	GVKEY	GVKEY	Numeric
Adjustment Factor	CALDT	Calendar Trading Date	Numeric
Time Series	RAWADJ	Raw Adjustment Factor	Numeric
CUMADJ	GVKEY	GVKEY	Numeric
Cumulative Adjustment	CALDT	Calendar Trading Date	Numeric
Factor Time Series	CUMADJ	Cumulative Adjustment Factor	Numeric
BKV	GVKEY	GVKEY	Numeric
Book Value Per Share	CALDT	Calendar Trading Date	Numeric
Time Series	BKV	Book Value Per Share	Numeric
CHEQVM	GVKEY	GVKEY	Numeric
Cash Equivalent	CALDT	Calendar Trading Date	Numeric
Distribution	CHECQVM	Cash Equivalent Distributions	Numeric
CSHOQ	GVKEY	GVKEY	Numeric
Common Share	CALDT	Calendar Trading Date	Numeric
Outstanding	CSHOQ	Common Shares Outstanding	Numeric
NAVM	GVKEY	GVKEY	Numeric
Net Asset Value	CALDT	Calendar Trading Date	Numeric
Time Series	NAVM	Net Asset Value	Numeric
OEPS12	GVKEY	GVKEY	Numeric
Earnings/Share	CALDT	Calendar Trading Date	Numeric
From Operations	OEPS12	Earnings/Share from Operations	Numeric
GICS	GVKEY	GVKEY	Numeric
Global Industry Class	CALDT	Calendar Trading Date	Numeric
Standard Code	GICS	Global Industry Class. Std. code	Numeric
CPSPIN	GVKEY	GVKEY	Numeric

Table 38.32 *continued*

Data Set	Fields	Label	Type
S&P Index Primary	CALDT	Calendar Trading Date	Numeric
Marker Time Series	CPSPIN	S&P Index Primary Marker	Character
DIVFT	GVKEY	GVKEY	Numeric
Dividends per	CALDT	Calendar Trading Date	Numeric
Share Footnotes	DIVFT	Dividends per share footnotes	Character
RAWADJFT	GVKEY	GVKEY	Numeric
Raw Adjustment	CALDT	Calendar Trading Date	Numeric
Factor Footnotes	RAWADJFT	Raw adjustment factor footnotes	Character
COMSTAFT	GVKEY	GVKEY	Numeric
Comparability Status	CALDT	Calendar Trading Date	Numeric
Footnotes	COMSTAFT	Comparability status footnotes	Character
ISAFIT	GVKEY	GVKEY	Numeric
Issue Status Alert	CALDT	Calendar Trading Date	Numeric
Footnotes	ISAFIT	Issue status alert footnotes	Character

SEGSRC Data Set—Operating Segment Source History**Table 38.33** SEGSRC Data Set—Operating Segment Source History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
RCST1	Reserved 1	Numeric
SSRCE	Source Document code	Character
SUCODE	Update code	Character
CURCD	ISO currency code	Character
SRCCUR	Source ISO currency code	Character
HNAICS	Segment Primary historical NAICS	Character

SEGPROD Data Set—Operating Segment Products History**Table 38.34** SEGPROD Data Set—Operating Segment Products History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
PDID	Product Identifier	Numeric
PSID	Segment Link segment identifier	Numeric
PSALE	External Revenues	Numeric
RCST1	Reserved 1	Numeric

Table 38.34 *continued*

Fields	Label	Type
PNAICS	Product NAICS code	Character
PSTYPE	Segment link segment type	Character
PNAME	Product Name	Character

SEGCUST Data Set—Operating Segment Customer History

Table 38.35 SEGCUST Data Set—Operating Segment Customer History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
CDID	Customer Identifier (cio)	Numeric
CSID	Segment Link segment identifier	Numeric
CSALE	Customer Revenues	Numeric
RCST1	Reserved 1	Numeric
CTYPE	Customer type	Character
CGEOCD	Geographic area code	Character
CGEOAR	Geographic area type	Character
CSTYPE	Segment link - segment type	Character
CNAME	Customer Name	Character

SEGDTL Data Set—Operating Segment Detail History

Table 38.36 SEGDTL Data Set—Operating Segment Detail History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
SID	Segment Identifier	Numeric
RCST1	Reserved 1	Numeric
STYPE	Segment type	Character
SOPTP1	Operating segment type 1	Character
SOPTP2	Operating segment type 2	Character
SGEOTP	Geographic segment type	Character
SNAME	Segment Name	Character

SEGNAICS Data Set—Operating Segment NAICS History**Table 38.37** SEGNAICS Data Set—Operating Segment NAICS History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
SID	Segment Identifier	Numeric
RANK	Ranking	Numeric
SIC	Segment SIC Code	Numeric
RST1	Reserved 1	Numeric
SNAICS	Segment NAICS code	Character
STYPE	Segment type	Character

SEGCEO Data Set—Geographic Segment History**Table 38.38** SEGCEO Data Set—Geographic Segment History

Fields	Label	Type
GVKEY	GVKEY	Numeric
SRCYR	Segment Source year	Numeric
SRCFYR	Segment Source fiscal year end month	Numeric
CALYR	Calendar Year	Numeric
SID	Segment Identifier	Numeric
RCST1	Reserved 1	Numeric
STYPE	Segment type	Character
SGEOCD	Geographic area code	Character
SGEOTP	Geographic segment type	Character

SEGCUR Data Set—Segment Currency Data**Table 38.39** SEGCUR Data Set—Segment Currency Data

Fields	Label	Type
GVKEY	GVKEY	Numeric
DATYR	Segment Data year (year)	Numeric
DATFYR	Segment Data fiscal year end month (fyf)	Numeric
CALYR	Segment Calendar Year (cyr)	Numeric
SRCYRFYR	Segment Source year and source fiscal (fyf)	Numeric
XRATE	Period end exchange rate	Numeric
XRATE12	12-month moving Exchange rate	Numeric
SRCCUR	Source currency code	Character
CURCD	ISO Currency code (USD)	Character

SEGITM Data Set—Segment Item Data**Table 38.40** SEGITM Data Set—Segment Item Data

Fields	Label	Type
GVKEY	GVKEY	Numeric
DATYR	Data year (year)	Numeric
FISCYR	Data Fiscal year end month (fyr)	Numeric
SRCYR	Source year	Numeric
SRCFYR	Source fiscal year end month	Numeric
CALYR	Data calendar year (cyr)	Numeric
SID	Segment Identifier	Numeric
EMP	Employees	Numeric
SALE	Net Sales	Numeric
OIBD	Operating income before depreciation	Numeric
DP	Depreciation and amortization	Numeric
OIAD	Operating income after depreciation	Numeric
CAPX	Capital expenditures	Numeric
IAT	Identifiable/total Assets	Numeric
EQEARN	Equity in earnings	Numeric
INVEQ	Investments at equity	Numeric
RD	Research and development	Numeric
OBKLG	Order backlog	Numeric
EXPORTS	Export sales	Numeric
INTSEG	Intersegment eliminations	Numeric
OPINC	Operating profit	Numeric
PI	Pretax income	Numeric
IB	Income Before Extraordinary Items	Numeric
NI	Net Income (loss)	Numeric
RCST1	Reserved 1	Numeric
RCST2	Reserved 2	Numeric
RCST3	Reserved 3	Numeric
SALEF	Footnote 1—sales	Character
OPINCF	Footnote 2—operating profit	Character
CAPXF	Footnote 3—capital expenditures	Character
EQEARNF	Footnote 4—equity in earnings	Character
EMPF	Footnote 5—employees	Character
RDF	Footnote 6—research and development	Character
STYPE	Segment type	Character

Available CRSP Indices Data Sets

INDHEAD Data Set—CRSP Index Header Data

Table 38.41 INDHEAD Data Set—CRSP Index Header Data

Fields	Label	Type
INDNO	Permanent index identification number	Numeric
INDCO	Permanent index group identification number	Numeric
PRIMFLAG	Index primary link	Numeric
PORTNUM	Portfolio number if subset series	Numeric
INDNAME	Index Name	Character
GROUPNAM	Index Group Name	Character

REBAL Data Set—Index Rebalancing History Arrays

Table 38.42 REBAL Data Set—Index Rebalancing History Arrays

Fields	Label	Type
INDNO	INDNO	Numeric
RBEGDT	Rebalancing beginning date	Numeric
REDDDT	Rebalancing ending date	Numeric
USDCNT	Count used as of rebalancing	Numeric
MAXCNT	Maximum count during period	Numeric
TOTCNT	Available count as of rebalancing	Numeric
ENDCNT	Count at end of period	Numeric
MINID	Identifier at minimum value	Numeric
MAXID	Identifier at maximum value	Numeric
MINSTA	Smallest statistic in period	Numeric
MAXSTA	Largest statistic in period	Numeric
MEDSTA	Median statistic in period	Numeric
AVGSTA	Average statistic in period	Numeric

REBAL Group Data Set—Index Rebalancing History Group Array

Table 38.43 REBAL Group Data Set—Index Rebalancing History Group Array

Fields	Label	Type
INDNO	INDNO	Numeric
RBEGDT1	Rebalancing beginning date for port 1	Numeric
RBEGDT2	Rebalancing beginning date for port 2	Numeric
RBEGDT3	Rebalancing beginning date for port 3	Numeric
RBEGDT4	Rebalancing beginning date for port 4	Numeric
RBEGDT5	Rebalancing beginning date for port 5	Numeric
RBEGDT6	Rebalancing beginning date for port 6	Numeric
RBEGDT7	Rebalancing beginning date for port 7	Numeric

Table 38.43 *continued*

Fields	Label	Type
RBEGDT8	Rebalancing beginning date for port 8	Numeric
RBEGDT9	Rebalancing beginning date for port 9	Numeric
RBEGDT10	Rebalancing beginning date for port 10	Numeric
RENDDET1	Rebalancing ending date for port 1	Numeric
RENDDET2	Rebalancing ending date for port 2	Numeric
RENDDET3	Rebalancing ending date for port 3	Numeric
RENDDET4	Rebalancing ending date for port 4	Numeric
RENDDET5	Rebalancing ending date for port 5	Numeric
RENDDET6	Rebalancing ending date for port 6	Numeric
RENDDET7	Rebalancing ending date for port 7	Numeric
RENDDET8	Rebalancing ending date for port 8	Numeric
RENDDET9	Rebalancing ending date for port 9	Numeric
RENDDET10	Rebalancing ending date for port 10	Numeric
USDCNT1	Count used as of rebalancing for port 1	Numeric
USDCNT2	Count used as of rebalancing for port 2	Numeric
USDCNT3	Count used as of rebalancing for port 3	Numeric
USDCNT4	Count used as of rebalancing for port 4	Numeric
USDCNT5	Count used as of rebalancing for port 5	Numeric
USDCNT6	Count used as of rebalancing for port 6	Numeric
USDCNT7	Count used as of rebalancing for port 7	Numeric
USDCNT8	Count used as of rebalancing for port 8	Numeric
USDCNT9	Count used as of rebalancing for port 9	Numeric
USDCNT10	Count used as of rebalancing for port10	Numeric
MAXCNT1	Maximum count during period for port 1	Numeric
MAXCNT2	Maximum count during period for port 2	Numeric
MAXCNT3	Maximum count during period for port 3	Numeric
MAXCNT4	Maximum count during period for port 4	Numeric
MAXCNT5	Maximum count during period for port 5	Numeric
MAXCNT6	Maximum count during period for port 6	Numeric
MAXCNT7	Maximum count during period for port 7	Numeric
MAXCNT8	Maximum count during period for port 8	Numeric
MAXCNT9	Maximum count during period for port 9	Numeric
MAXCNT10	Maximum count during period for port 10	Numeric
TOTCNT1	Available count as of rebalancing for port 1	Numeric
TOTCNT2	Available count as of rebalancing for port 2	Numeric
TOTCNT3	Available count as of rebalancing for port 3	Numeric
TOTCNT4	Available count as of rebalancing for port 4	Numeric
TOTCNT5	Available count as of rebalancing for port 5	Numeric
TOTCNT6	Available count as of rebalancing for port 6	Numeric
TOTCNT7	Available count as of rebalancing for port 7	Numeric
TOTCNT8	Available count as of rebalancing for port 8	Numeric
TOTCNT9	Available count as of rebalancing for port 9	Numeric
TOTCNT10	Available count as of rebalancing for port10	Numeric
ENDCNT1	Count at end of period for port 1	Numeric
ENDCNT2	Count at end of period for port 2	Numeric

Table 38.43 *continued*

Fields	Label	Type
ENDCNT3	Count at end of period for port 3	Numeric
ENDCNT4	Count at end of period for port 4	Numeric
ENDCNT5	Count at end of period for port 5	Numeric
ENDCNT6	Count at end of period for port 6	Numeric
ENDCNT7	Count at end of period for port 7	Numeric
ENDCNT8	Count at end of period for port 8	Numeric
ENDCNT9	Count at end of period for port 9	Numeric
ENDCNT10	Count at end of period for port 10	Numeric
MINID1	Identifier at minimum value for port 1	Numeric
MINID2	Identifier at minimum value for port 2	Numeric
MINID3	Identifier at minimum value for port 3	Numeric
MINID4	Identifier at minimum value for port 4	Numeric
MINID5	Identifier at minimum value for port 5	Numeric
MINID6	Identifier at minimum value for port 6	Numeric
MINID7	Identifier at minimum value for port 7	Numeric
MINID8	Identifier at minimum value for port 8	Numeric
MINID9	Identifier at minimum value for port 9	Numeric
MINID10	Identifier at minimum value for port 10	Numeric
MAXID1	Identifier at maximum value for port 1	Numeric
MAXID2	Identifier at maximum value for port 2	Numeric
MAXID3	Identifier at maximum value for port 3	Numeric
MAXID4	Identifier at maximum value for port 4	Numeric
MAXID5	Identifier at maximum value for port 5	Numeric
MAXID6	Identifier at maximum value for port 6	Numeric
MAXID7	Identifier at maximum value for port 7	Numeric
MAXID8	Identifier at maximum value for port 8	Numeric
MAXID9	Identifier at maximum value for port 9	Numeric
MAXID10	Identifier at maximum alue for port 10	Numeric
MINSTA1	Smallest statistic in period for port 1	Numeric
MINSTA2	Smallest statistic in period for port 2	Numeric
MINSTA3	Smallest statistic in period for port 3	Numeric
MINSTA4	Smallest statistic in period for port 4	Numeric
MINSTA5	Smallest statistic in period for port 5	Numeric
MINSTA6	Smallest statistic in period for port 6	Numeric
MINSTA7	Smallest statistic in period for port 7	Numeric
MINSTA8	Smallest statistic in period for port 8	Numeric
MINSTA9	Smallest statistic in period for port 9	Numeric
MINSTA10	Smallest statistic in period for port 10	Numeric
MAXSTA1	Largest statistic in period for port 1	Numeric
MAXSTA2	Largest statistic in period for port 2	Numeric
MAXSTA3	Largest statistic in period for port 3	Numeric
MAXSTA4	Largest statistic in period for port 4	Numeric
MAXSTA5	Largest statistic in period for port 5	Numeric
MAXSTA6	Largest statistic in period for port 6	Numeric
MAXSTA7	Largest statistic in period for port 7	Numeric

Table 38.43 *continued*

Fields	Label	Type
MAXSTA8	Largest statistic in period for port 8	Numeric
MAXSTA9	Largest statistic in period for port 9	Numeric
MAXSTA10	Largest statistic in period for port 10	Numeric
MEDSTA1	Median statistic in period for port 1	Numeric
MEDSTA2	Median statistic in period for port 2	Numeric
MEDSTA3	Median statistic in period for port 3	Numeric
MEDSTA4	Median statistic in period for port 4	Numeric
MEDSTA5	Median statistic in period for port 5	Numeric
MEDSTA6	Median statistic in period for port 6	Numeric
MEDSTA7	Median statistic in period for port 7	Numeric
MEDSTA8	Median statistic in period for port 8	Numeric
MEDSTA9	Median statistic in period for port 9	Numeric
MEDSTA10	Median statistic in period for port 10	Numeric
AVGSTA1	Average statistic in period for port 1	Numeric
AVGSTA2	Average statistic in period for port 2	Numeric
AVGSTA3	Average statistic in period for port 3	Numeric
AVGSTA4	Average statistic in period for port 4	Numeric
AVGSTA5	Average statistic in period for port 5	Numeric
AVGSTA6	Average statistic in period for port 6	Numeric
AVGSTA7	Average statistic in period for port 7	Numeric
AVGSTA8	Average statistic in period for port 8	Numeric
AVGSTA9	Average statistic in period for port 9	Numeric
AVGSTA10	Average statistic in period for port 10	Numeric

LIST Data Set—Index Membership List Arrays

Table 38.44 LIST Data Set—Index Membership List Arrays

Fields	Label	Type
INDNO	INDNO	Numeric
PERMNO	Issue identifier	Numeric
BEGDT	First date included	Numeric
ENDDT	Last date included	Numeric
SUBIND	Code for subcategory of list	Numeric
WEIGHT	Weight during range	Numeric

LIST Group Data Set—Index Membership List Group Arrays

Table 38.45 LIST Group Data Set—Index Membership List Group Arrays

Fields	Label	Type
INDNO	INDNO	Numeric
PERMNO1	Issue identifier	Numeric
BEGDT1	First date included	Numeric
ENDDT1	Last date included	Numeric

Table 38.45 *continued*

Fields	Label	Type
SUBIND1	Code for subcategory of list	Numeric
WEIGHT1	Weight during range	Numeric

USDCNT Data Set—Portfolio Used Count Array**Table 38.46** USDCNT Data Set—Portfolio Used Count Array

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
USDCNT	Portfolio Used Count	Numeric

TOTCNT Data Set—Portfolio Total Count Array**Table 38.47** TOTCNT Data Set—Portfolio Total Count Array

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TOTCNT	Portfolio Used Count	Numeric

USDCNT Group Data Set—Portfolio Used Time Series Group**Table 38.48** USDCNT Group Data Set—Portfolio Used Time Series Group

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
USDCNT1	Used Count for Port 1	Numeric
USDCNT2	Used Count for Port 2	Numeric
USDCNT3	Used Count for Port 3	Numeric
USDCNT4	Used Count for Port 4	Numeric
USDCNT5	Used Count for Port 5	Numeric
USDCNT6	Used Count for Port 6	Numeric
USDCNT7	Used Count for Port 7	Numeric
USDCNT8	Used Count for Port 8	Numeric
USDCNT9	Used Count for Port 9	Numeric
USDCNT10	Used Count for Port 10	Numeric
USDCNT11	Used Count for Port 11	Numeric
USDCNT12	Used Count for Port 12	Numeric
USDCNT13	Used Count for Port 13	Numeric
USDCNT14	Used Count for Port 14	Numeric
USDCNT15	Used Count for Port 15	Numeric
USDCNT16	Used Count for Port 16	Numeric

Table 38.48 *continued*

Fields	Label	Type
USDCNT17	Used Count for Port 17	Numeric

TOTCNT Group Data Set—Portfolio Total Count Time Series Groups

Table 38.49 TOTCNT Group Data Set—Portfolio Total Count Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TOTCNT1	Total Count for Port 1	Numeric
TOTCNT2	Total Count for Port 2	Numeric
TOTCNT3	Total Count for Port 3	Numeric
TOTCNT4	Total Count for Port 4	Numeric
TOTCNT5	Total Count for Port 5	Numeric
TOTCNT6	Total Count for Port 6	Numeric
TOTCNT7	Total Count for Port 7	Numeric
TOTCNT8	Total Count for Port 8	Numeric
TOTCNT9	Total Count for Port 9	Numeric
TOTCNT10	Total Count for Port10	Numeric
TOTCNT11	Total Count for Port11	Numeric
TOTCNT12	Total Count for Port12	Numeric
TOTCNT13	Total Count for Port13	Numeric
TOTCNT14	Total Count for Port14	Numeric
TOTCNT15	Total Count for Port15	Numeric
TOTCNT16	Total Count for Port16	Numeric
TOTCNT17	Total Count for Port17	Numeric

USDVAL Data Set—Portfolio Used Value Array

Table 38.50 USDVAL Data Set—Portfolio Used Value Array

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
USDVAL	Portfolio Used Value	Numeric

TOTVAL Data Set—Portfolio Total Value Array

Table 38.51 TOTVAL Data Set—Portfolio Total Value Array

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TOTVAL	Portfolio Total Value	Numeric

USDVAL Group Data Set—Portfolio Used Value Time Series Groups**Table 38.52** USDVAL Group Data Set—Portfolio Used Value Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
USDVAL1	Used Value for Port 1	Numeric
USDVAL2	Used Value for Port 2	Numeric
USDVAL3	Used Value for Port 3	Numeric
USDVAL4	Used Value for Port 4	Numeric
USDVAL5	Used Value for Port 5	Numeric
USDVAL6	Used Value for Port 6	Numeric
USDVAL7	Used Value for Port 7	Numeric
USDVAL8	Used Value for Port 8	Numeric
USDVAL9	Used Value for Port 9	Numeric
USDVAL10	Used Value for Port 10	Numeric
USDVAL11	Used Value for Port 11	Numeric
USDVAL12	Used Value for Port 12	Numeric
USDVAL13	Used Value for Port 13	Numeric
USDVAL14	Used Value for Port 14	Numeric
USDVAL15	Used Value for Port 15	Numeric
USDVAL16	Used Value for Port 16	Numeric
USDVAL17	Used Value for Port 17	Numeric

TOTVAL Group Data Set—Portfolio Total Value Time Series Groups**Table 38.53** TOTVAL Group Data Set—Portfolio Total Value Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TOTVAL1	Total Value for Port 1	Numeric
TOTVAL2	Total Value for Port 2	Numeric
TOTVAL3	Total Value for Port 3	Numeric
TOTVAL4	Total Value for Port 4	Numeric
TOTVAL5	Total Value for Port 5	Numeric
TOTVAL6	Total Value for Port 6	Numeric
TOTVAL7	Total Value for Port 7	Numeric
TOTVAL8	Total Value for Port 8	Numeric
TOTVAL9	Total Value for Port 9	Numeric
TOTVAL10	Total Value for Port10	Numeric
TOTVAL11	Total Value for Port11	Numeric
TOTVAL12	Total Value for Port12	Numeric
TOTVAL13	Total Value for Port13	Numeric
TOTVAL14	Total Value for Port14	Numeric
TOTVAL15	Total Value for Port15	Numeric
TOTVAL16	Total Value for Port16	Numeric

Table 38.53 *continued*

Fields	Label	Type
TOTVAL17	Total Value for Port17	Numeric

TRET Data Set—Total Returns Time Series**Table 38.54** TRET Data Set—Total Returns Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TRET	Total Returns	Numeric

ARET Data Set—Appreciation Returns Time Series**Table 38.55** ARET Data Set—Appreciation Returns Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
ARET	Appreciation Returns Time Series	Numeric

IRET Data Set—Income Returns Time Series**Table 38.56** IRET Data Set—Income Returns Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
IRET	Income Returns	Numeric

TRET Group Data Set—Total Returns Time Series Groups**Table 38.57** TRET Group Data Set—Total Returns Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TRET1	Total Returns for Port 1	Numeric
TRET2	Total Returns for Port 2	Numeric
TRET3	Total Returns for Port 3	Numeric
TRET4	Total Returns for Port 4	Numeric
TRET5	Total Returns for Port 5	Numeric
TRET6	Total Returns for Port 6	Numeric
TRET7	Total Returns for Port 7	Numeric
TRET8	Total Returns for Port 8	Numeric

Table 38.57 *continued*

Fields	Label	Type
TRET9	Total Returns for Port 9	Numeric
TRET10	Total Returns for Port 10	Numeric
TRET11	Total Returns for Port 11	Numeric
TRET12	Total Returns for Port 12	Numeric
TRET13	Total Returns for Port 13	Numeric
TRET14	Total Returns for Port 14	Numeric
TRET15	Total Returns for Port 15	Numeric
TRET16	Total Returns for Port 16	Numeric
TRET17	Total Returns for Port 17	Numeric

ARET Group Data Set—Appreciation Returns Time Series Groups

Table 38.58 ARET Group Data Set—Appreciation Returns Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
ARET1	Appreciation Returns for Port 1	Numeric
ARET2	Appreciation Returns for Port 2	Numeric
ARET3	Appreciation Returns for Port 3	Numeric
ARET4	Appreciation Returns for Port 4	Numeric
ARET5	Appreciation Returns for Port 5	Numeric
ARET6	Appreciation Returns for Port 6	Numeric
ARET7	Appreciation Returns for Port 7	Numeric
ARET8	Appreciation Returns for Port 8	Numeric
ARET9	Appreciation Returns for Port 9	Numeric
ARET10	Appreciation Returns for Port 10	Numeric
ARET11	Appreciation Returns for Port 11	Numeric
ARET12	Appreciation Returns for Port 12	Numeric
ARET13	Appreciation Returns for Port 13	Numeric
ARET14	Appreciation Returns for Port 14	Numeric
ARET15	Appreciation Returns for Port 15	Numeric
ARET16	Appreciation Returns for Port 16	Numeric
ARET17	Appreciation Returns for Port 17	Numeric

IRET Group Data Set—Income Returns Time Series Groups

Table 38.59 IRET Group Data Set—Income Returns Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
IRET1	Income Returns for Port 1	Numeric
IRET2	Income Returns for Port 2	Numeric
IRET3	Income Returns for Port 3	Numeric

Table 38.59 *continued*

Fields	Label	Type
IRET4	Income Returns for Port 4	Numeric
IRET5	Income Returns for Port 5	Numeric
IRET6	Income Returns for Port 6	Numeric
IRET7	Income Returns for Port 7	Numeric
IRET8	Income Returns for Port 8	Numeric
IRET9	Income Returns for Port 9	Numeric
IRET10	Income Returns for Port 10	Numeric
IRET11	Income Returns for Port 11	Numeric
IRET12	Income Returns for Port 12	Numeric
IRET13	Income Returns for Port 13	Numeric
IRET14	Income Returns for Port 14	Numeric
IRET15	Income Returns for Port 15	Numeric
IRET16	Income Returns for Port 16	Numeric
IRET17	Income Returns for Port 17	Numeric

TIND Data Set—Total Return Index Levels Time Series**Table 38.60** TIND Data Set—Total Return Index Levels Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TIND	Total Return Index Levels	Numeric

AIND Data Set—Appreciation Index Levels Time Series**Table 38.61** AIND Data Set—Appreciation Index Levels Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
AIND	Appreciation Index Levels	Numeric

IIND Data Set—Income Index Levels Time Series**Table 38.62** IIND Data Set—Income Index Levels Time Series

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
IIND	Income Index Levels	Numeric

TIND Group Data Set—Total Return Index Levels Time Series Groups**Table 38.63** TIND Group Data Set—Total Return Index Levels Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
TIND1	Total Return Index Levels for Port 1	Numeric
TIND2	Total Return Index Levels for Port 2	Numeric
TIND3	Total Return Index Levels for Port 3	Numeric
TIND4	Total Return Index Levels for Port 4	Numeric
TIND5	Total Return Index Levels for Port 5	Numeric
TIND6	Total Return Index Levels for Port 6	Numeric
TIND7	Total Return Index Levels for Port 7	Numeric
TIND8	Total Return Index Levels for Port 8	Numeric
TIND9	Total Return Index Levels for Port 9	Numeric
TIND10	Total Return Index Levels for Port 10	Numeric
TIND11	Total Return Index Levels for Port 11	Numeric
TIND12	Total Return Index Levels for Port 12	Numeric
TIND13	Total Return Index Levels for Port 13	Numeric
TIND14	Total Return Index Levels for Port 14	Numeric
TIND15	Total Return Index Levels for Port 15	Numeric
TIND16	Total Return Index Levels for Port 16	Numeric
TIND17	Total Return Index Levels for Port 17	Numeric

AIND Group Data Set—Appreciation Index Levels Groups**Table 38.64** AIND Group Data Set—Appreciation Index Levels Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
AIND1	Appreciation Index Levels for Port 1	Numeric
AIND2	Appreciation Index Levels for Port 2	Numeric
AIND3	Appreciation Index Levels for Port 3	Numeric
AIND4	Appreciation Index Levels for Port 4	Numeric
AIND5	Appreciation Index Levels for Port 5	Numeric
AIND6	Appreciation Index Levels for Port 6	Numeric
AIND7	Appreciation Index Levels for Port 7	Numeric
AIND8	Appreciation Index Levels for Port 8	Numeric
AIND9	Appreciation Index Levels for Port 9	Numeric
AIND10	Appreciation Index Levels for Port 10	Numeric
AIND11	Appreciation Index Levels for Port 11	Numeric
AIND12	Appreciation Index Levels for Port 12	Numeric
AIND13	Appreciation Index Levels for Port 13	Numeric
AIND14	Appreciation Index Levels for Port 14	Numeric
AIND15	Appreciation Index Levels for Port 15	Numeric
AIND16	Appreciation Index Levels for Port 16	Numeric

Table 38.64 *continued*

Fields	Label	Type
AIND17	Appreciation Index Levels for Port 17	Numeric

IIND Group Data Set—Income Index Levels Time Series Groups**Table 38.65** IIND Group Data Set—Income Index Levels Time Series Groups

Fields	Label	Type
INDNO	INDNO	Numeric
CALDT	Calendar Trading Date	Numeric
IIND1	Income Index Levels for Port 1	Numeric
IIND2	Income Index Levels for Port 2	Numeric
IIND3	Income Index Levels for Port 3	Numeric
IIND4	Income Index Levels for Port 4	Numeric
IIND5	Income Index Levels for Port 5	Numeric
IIND6	Income Index Levels for Port 6	Numeric
IIND7	Income Index Levels for Port 7	Numeric
IIND8	Income Index Levels for Port 8	Numeric
IIND9	Income Index Levels for Port 9	Numeric
IIND10	Income Index Levels for Port 10	Numeric
IIND11	Income Index Levels for Port 11	Numeric
IIND12	Income Index Levels for Port 12	Numeric
IIND13	Income Index Levels for Port 13	Numeric
IIND14	Income Index Levels for Port 14	Numeric
IIND15	Income Index Levels for Port 15	Numeric
IIND16	Income Index Levels for Port 16	Numeric
IIND17	Income Index Levels for Port 17	Numeric

Examples: SASECRSP Interface Engine

Example 38.1: Specifying PERMNOs and RANGE on the LIBNAME Statement

The following statements show how to set up a LIBNAME statement for extracting data for certain selected PERMNOs during a specific time period. The result is shown in [Output 38.1.1](#).

```
title2 'Define a range inside the data range';
title3 'My range is ( 19950101-19960630 )';

libname _all_ clear;
libname testit1 sasecrsp "%sysget(CRSP_MSTK) "
    setid=20
    permno=81871      /* Desired PERMNOs are selected */
    permno=82200      /* via the libname PERMNO= option */
    permno=82224
    permno=83435
    permno=83696
    permno=83776
    permno=84788
    range='19950101-19960630';

proc print data=testit1.ask;
run;
```

Output 38.1.1 ASK Monthly Time Series Data with RANGE

Define a range inside the data range
 My range is (19950101-19960630)

Obs	PERMNO	CALDT	ASK
1	81871	19950731	18.25000
2	81871	19950831	19.25000
3	81871	19950929	26.00000
4	81871	19951031	26.00000
5	81871	19951130	25.50000
6	81871	19951229	24.25000
7	81871	19960131	22.00000
8	81871	19960229	32.50000
9	81871	19960329	30.25000
10	81871	19960430	33.75000
11	81871	19960531	27.50000
12	81871	19960628	30.50000
13	82200	19950831	49.50000
14	82200	19950929	62.75000
15	82200	19951031	88.00000
16	82200	19951130	138.50000
17	82200	19951229	139.25000
18	82200	19960131	164.25000
19	82200	19960229	51.00000
20	82200	19960329	41.62500
21	82200	19960430	61.25000
22	82200	19960531	68.25000
23	82200	19960628	62.50000
24	82224	19950929	46.50000
25	82224	19951031	48.50000
26	82224	19951130	47.75000
27	82224	19951229	49.75000
28	82224	19960131	49.00000
29	82224	19960229	47.00000
30	82224	19960329	53.00000
31	82224	19960430	55.50000
32	82224	19960531	54.25000
33	82224	19960628	51.00000
34	83435	19960430	30.25000
35	83435	19960531	28.00000
36	83435	19960628	21.00000
37	83696	19960628	19.12500

Example 38.2: Using the LIBNAME Statement to Access All Keys

To set up the libref to access all keys, no key options such as PERMNO=, TICKER=, or GVKEY= are specified on the LIBNAME statement, and no INSET= option is used. Use of any of these options causes the engine to limit access to only specified keys or specified insets. When no such options are specified, the engine correctly defaults to selecting all keys in the database. Other LIBNAME options such as the RANGE= option can still be used normally to limit the time span of the data, in other words, to define the date range of observations.

In this example, no key-specifying options are used. This forces the engine to default to all PERMNOs in the monthly STK database. The range given on the LIBNAME behaves normally, and data is limited to the first two months of 1995.

```
title2 'Define a range inside the data range ';
title3 'My range is ( 19950101-19950228 )';

libname _all_ clear;
libname testit2 sasexrsp "%sysget(CRSP_MSTK) "
    setid=20
    range='19950101-19950228';
data a;
    set testit2.ask(obs=30);
run;

proc print data=a;
run;
```

The result is shown in [Output 38.2.1](#).

Output 38.2.1 All PERMNOs of ASK Monthly with RANGE

Define a range inside the data range
 My range is (19950101-19950228)

Obs	PERMNO	CALDT	ASK
1	10001	19950131	8.00000
2	10001	19950228	8.00000
3	10002	19950131	13.50000
4	10002	19950228	13.50000
5	10003	19950131	2.12500
6	10003	19950228	2.25000
7	10009	19950131	18.00000
8	10009	19950228	18.75000
9	10010	19950131	5.37500
10	10010	19950228	4.87500
11	10011	19950131	14.62500
12	10011	19950228	13.50000
13	10012	19950131	2.25000
14	10012	19950228	2.12500
15	10016	19950131	7.00000
16	10016	19950228	8.50000
17	10018	19950131	1.12500
18	10018	19950228	1.12500
19	10019	19950131	10.62500
20	10019	19950228	11.62500
21	10021	19950131	11.75000
22	10021	19950228	12.00000
23	10025	19950131	18.50000
24	10025	19950228	19.00000
25	10026	19950131	11.00000
26	10026	19950228	11.75000
27	10028	19950131	1.87500
28	10028	19950228	2.00000
29	10032	19950131	12.50000
30	10032	19950228	12.75000

Example 38.3: Accessing One PERMNO Using No RANGE

SASECRSP defaults to providing access to the entire range of available data when no range restriction is specified via the RANGE= option.

This example shows access of the entire range of available data for one particular PERMNO extracted from the monthly data set.

```
title2 'Select only PERMNO = 81871';
title3 'Valid trading dates (19890131--19981231)';
title4 'No range option, leave wide open';

libname _all_ clear;
libname testit3 sasecrsp "%sysget(CRSP_MSTK) "
    setid=20
    permno=81871;

data c;
    set testit3.ask;
run;

proc print data=c;
run;
```

The result is shown in [Output 38.3.1](#).

Output 38.3.1 PERMNO=81871 of ASK Monthly without RANGE

Select only PERMNO = 81871
 Valid trading dates (19890131--19981231)
 No range option, leave wide open

Obs	PERMNO	CALDT	ASK
1	81871	19950731	18.25000
2	81871	19950831	19.25000
3	81871	19950929	26.00000
4	81871	19951031	26.00000
5	81871	19951130	25.50000
6	81871	19951229	24.25000
7	81871	19960131	22.00000
8	81871	19960229	32.50000
9	81871	19960329	30.25000
10	81871	19960430	33.75000
11	81871	19960531	27.50000
12	81871	19960628	30.50000
13	81871	19960731	26.12500
14	81871	19960830	19.12500
15	81871	19960930	19.50000
16	81871	19961031	14.00000
17	81871	19961129	18.75000
18	81871	19961231	24.25000
19	81871	19970131	29.75000
20	81871	19970228	24.37500
21	81871	19970331	15.00000
22	81871	19970430	18.25000
23	81871	19970530	25.12500
24	81871	19970630	31.12500
25	81871	19970731	35.00000
26	81871	19970829	33.00000
27	81871	19970930	26.81250
28	81871	19971031	18.37500
29	81871	19971128	16.50000
30	81871	19971231	16.25000
31	81871	19980130	22.75000
32	81871	19980227	21.00000
33	81871	19980331	22.50000
34	81871	19980430	16.12500
35	81871	19980529	11.12500
36	81871	19980630	13.43750
37	81871	19980731	22.87500
38	81871	19980831	17.75000
39	81871	19980930	24.25000
40	81871	19981030	26.00000

Example 38.4: Specifying Keys Using the INSET= Option

The INSET= option enables you to select any companies and/or issues you want data for. This example selects two CRSP Index Series from the Indices database, two companies from the CCM database, and four

securities from the Stock database for data extraction. Note that because each CRSP database might be in a different location and has to be opened separately, a total of three different librefs are used, one for each database.

```
data indices;
    indno=1000000; output; /* NYSE Value-Weighted Market Index */
    indno=1000001; output; /* NYSE Equal-Weighted Market Index */
run;

libname _all_ clear;
libname ind2 sasocrsp "%sysget(CRSP_MSTK)"
    setid=420
    inset='indices,INDNO,INDNO'
    range='19990101-19990401';

title2 'Total Returns for NYSE Value and Equal Weighted Market Indices';
proc print data=ind2.tret label;
run;
```

Output 38.4.1 shows the result of selecting two CRSP Index Series from the Indices database.

Output 38.4.1 IND Data Extracted Using INSET= Option

Total Returns for NYSE Value and Equal Weighted Market Indices				
Obs	INDNO	Calendar Trading Date	Total Returns	
1	1000000	19990129	0.012419	
2	1000000	19990226	-0.024179	
3	1000000	19990331	0.028591	
4	1000001	19990129	-0.007822	
5	1000001	19990226	-0.041127	
6	1000001	19990331	0.015204	

This example selects two companies from the CCM database.

```
data companies;
    permco=8045; output; /* Oracle */
    permco=20483; output; /* Citigroup */
run;

libname comp2 sasocrsp "%sysget(CRSP_CST)"
    setid=200
    inset='companies,PERMCO,PERMCO'
    range='20040101-20040531';

title2 'Using the Link Info of Selected PERMCOs';
proc print data=comp2.link label;
run;

title3 'To Show Dividends Per Share for Oracle and Citigroup';
```

```
proc print data=comp2.div label;
run;
```

Output 38.4.2 shows the result of selecting two companies from the CCM database by using the CCM LINK data and the INSET= option.

Output 38.4.2 CCM LINK Data Extracted By Using INSET= Option

Using the Link Info of Selected PERMCOs							
Obs	GVKEY	First date link is valid	Last date link is valid	CRSP PERMNO linked	CRSP PERMCO linked	Link type code	Linking Flag
1	12142	19860312	20991231	10104	8045	LC	BBB
2	3243	19861029	20991231	70519	20483	LC	BBB

Output 38.4.3 shows the result of selecting two companies from the CCM database by using the CCM DIV data and the INSET= option.

Output 38.4.3 CCM DIV Data Extracted By Using INSET= Option

Using the Link Info of Selected PERMCOs To Show Dividends Per Share for Oracle and Citigroup				
Obs	GVKEY	Calendar Trading Date	Dividends Per share	
1	12142	20040130	0.0000	
2	12142	20040227	0.0000	
3	12142	20040331	0.0000	
4	12142	20040430	0.0000	
5	12142	20040528	0.0000	
6	3243	20040130	0.4000	
7	3243	20040227	0.0000	
8	3243	20040331	0.0000	
9	3243	20040430	0.4000	
10	3243	20040528	0.0000	

This example selects three securities from the Stock database by using TICKERs in the INSET= option for data extraction.

```
data securities;
  ticker='BAC'; output; /* Bank of America */
  ticker='DUK'; output; /* Duke Energy */
  ticker='GSK'; output; /* GlaxoSmithKline */
run;

libname sec3 sasecrsp "%sysget(CRSP_MSTK) "
  setid=20
```

```

inset='securities,TICKER,TICKER'
range='19970820-19970920';

title2 'PERMNOs and General Header Info of Selected TICKERs';
proc print data=sec3.stkhead(keep=permno htick htssymbol) label;
run;
title3 'Average Price for Bank of America, Duke and GlaxoSmithKline';
proc print data=sec3.prc label;
run;

```

Output 38.4.4 shows the STK header data for the TICKERs specified by using the INSET= option.

Output 38.4.4 STK Header Data Extracted Using INSET= Option

PERMNOs and General Header Info of Selected TICKERs				
Obs	PERMNO	Ticker Symbol Header	Trading Symbol Header	
1	59408	BAC	BAC	
2	27959	DUK	DUK	
3	75064	GSK	GSK	

Output 38.4.5 shows the STK price data for the TICKERs specified by using the INSET= option.

Output 38.4.5 STK Price Data Extracted Using INSET= Option

PERMNOs and General Header Info of Selected TICKERs				
Average Price for Bank of America, Duke and GlaxoSmithKline				
Obs	PERMNO	Calendar Trading Date	Price or Bid/Ask Average	
1	59408	19970829	59.75000	
2	27959	19970829	48.43750	
3	75064	19970829	39.93750	

Example 38.5: Specifying Ranges for Individual Keys with the INSET= Option

Insets enable you to define options specific to each individual key. This example uses an inset to select four PERMNOs and specifies a different date restriction for each PERMNO.

```

title2 'INSET=testin2 uses date ranges along with PERMNOs:';
title3 '10107, 12490, 14322, 25788';
title4 'Begin dates and end dates for each permno are used in the INSET';

data testin2;
    permno = 10107; date1 = 19980731; date2 = 19981231; output;
    permno = 12490; date1 = 19970101; date2 = 19971231; output;
    permno = 14322; date1 = 19950731; date2 = 19960131; output;
    permno = 25778; date1 = 19950101; date2 = 19950331; output;
run;

libname _all_ clear;
libname mstk2 sasecrsp "%sysget (CRSP_MSTK) "
    setid=20
    inset='testin2,PERMNO,PERMNO,DATE1,DATE2';

data b;
    set mstk2.prc;
run;

proc print data=b;
run;

```

[Output 38.5.1](#) shows CRSP Stock price time series data selected by PERMNO in the INSET= option, where each PERMNO has its own time span specified in the INSET= option.

Output 38.5.1 PRC Monthly Time Series Using INSET= Option

```
INSET=testin2 uses date ranges along with PERMNOs:
10107, 12490, 14322, 25788
Begin dates and end dates for each permno are used in the INSET
```

Obs	PERMNO	CALDT	PRC
1	10107	19980731	109.93750
2	10107	19980831	95.93750
3	10107	19980930	110.06250
4	10107	19981030	105.87500
5	10107	19981130	122.00000
6	10107	19981231	138.68750
7	12490	19970131	156.87500
8	12490	19970228	143.75000
9	12490	19970331	137.25000
10	12490	19970430	160.50000
11	12490	19970530	86.50000
12	12490	19970630	90.25000
13	12490	19970731	105.75000
14	12490	19970829	101.37500
15	12490	19970930	106.00000
16	12490	19971031	98.50000
17	12490	19971128	109.50000
18	12490	19971231	104.62500
19	14322	19950731	32.62500
20	14322	19950831	32.37500
21	14322	19950929	36.87500
22	14322	19951031	34.00000
23	14322	19951130	39.37500
24	14322	19951229	39.00000
25	14322	19960131	41.50000
26	25778	19950131	49.87500
27	25778	19950228	57.25000
28	25778	19950331	59.37500

Example 38.6: Converting Dates By Using the CRSP Date Functions

This example shows how to use the CRSP date functions and formats. The CRSPDTD formats are used for all the crspdt variables, while the YYMMDD format is used for the sasdt variables.

```
title2 'OUT= Data Set';
title3 'CRSP Functions for sasecrsp';

libname _all_ clear;

/* Always assign the LIBNAME sasecrsp first */
libname mstk sasecrsp "%sysget(CRSP_MSTK)"
    setid=20;

data a (keep = crspdt crspdt2 crspdt3
```

```

        sasdt sasdt2 sasdt3
        intdt intdt2 intdt3);
format crspdt crspdt2 crspdt3 crspdt8.;
format sasdt sasdt2 sasdt3 yymmdd6.;
format intdt intdt2 intdt3 8.;
format exact 2.;
crspdt = 1;
sasdt = '2jul1962'd;
intdt = 19620702;
exact = 0;

/* Call the CRSP date to Integer function*/
intdt2 = crspdcid(crspdt);

/* Call the SAS date to Integer function*/
intdt3 = crspds2i(sasdt);

/* Call the Integer to Crsp date function*/
crspdt2 = crspdicd(intdt,exact);

/* Call the Sas date to Crsp date conversion function*/
crspdt3 = crspds2c(sasdt,exact);

/* Call the CRSP date to SAS date conversion function*/
sasdt2 = crspdc2s(crspdt);

/* Call the Integer to Sas date conversion function*/
sasdt3 = crspdi2s(intdt);
run;

title3 'PROC PRINT showing data for sasecrsp';
proc print data=a;
run;

title3 'PROC CONTENTS showing formats for sasecrsp';
proc contents data=a;
run;

```

Output 38.6.1 shows the OUT= data set created by the DATA step.

Output 38.6.1 Date Conversions By Using the CRSP Date Functions

OUT= Data Set									
PROC PRINT showing data for sasecrsp									
Obs	crspdt	crspdt2	crspdt3	sasdt	sasdt2	sasdt3	intdt	intdt2	intdt3
1	19251231	19620702	19620702	620702	251231	620702	19620702	19251231	19620702

Output 38.6.2 shows the contents of the OUT= data set by alphabetically listing the variables and their attributes.

Output 38.6.2 Contents of Date Conversions By Using the CRSP Date Functions

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format
1	crspdt	Num	8	CRSPDTD8.
2	crspdt2	Num	8	CRSPDTD8.
3	crspdt3	Num	8	CRSPDTD8.
7	intdt	Num	8	8.
8	intdt2	Num	8	8.
9	intdt3	Num	8	8.
4	sasdt	Num	8	YYMMDD6.
5	sasdt2	Num	8	YYMMDD6.
6	sasdt3	Num	8	YYMMDD6.

Example 38.7: Comparing Different Ways of Accessing CCM Data

You can use three different ways to select CCM data: by the primary key, *GVKEY*, or by either of the two secondary keys *PERMNO* and *PERMCO*. This section demonstrate the three different ways.

This example retrieves data on Cimflex Teknowledge Corporation which was previously known as Teknowledge Inc. This company is considered a single entity by the CRSP Stock database and is identified by *PERMNO*=10083 and *PERMCO*=8026. The Compustat database, however, considers Teknowledge Inc. and Cimflex Teknowledge Corporation as two separate entities, and each has its own *GVKEY*. Thus, *PERMNO*=10083 maps to *GVKEY*s 11947 and 15495, and *PERMCO*=8026 has the identical relationship. Access by *PERMNO* and *PERMCO* are equivalent in this case, but differ from access by *GVKEY*. *PERMNO*/*PERMCO* access retrieves data only within the active period of the links, and only the primary linked *GVKEY* is used for header access. In contrast, *GVKEY* access provides wide-open, full data for both *GVKEY*s. See *PERMNO*= option for more details.

```

title1 'Comparing various access methods for CCM data';
libname _all_ clear;

/* assign libnames for the three different access methods */
libname crsp1a sasocrsp "%sysget(CRSP_CST)"
      setid=200
      permno=10083
      range='19870101-19900101';

libname crsp1b sasocrsp "%sysget(CRSP_CST)"
      setid=200
      permco=8026
      range='19870101-19900101';

libname crsp2 sasocrsp "%sysget(CRSP_CST)"
      setid=200
      gvkey=11947 gvkey=15495
      range='19870101-19900101';

```

```

title2 'PERMNO=10083 access of CCM data';
title3 'Sales (Net)';

data permnoaccess;
  set crsp1a.iqitems(keep=gvkey rcaldt fiscaldt iq2);
run;

proc print data=permnoaccess;
run;

```

Output 38.7.1 shows PERMNO access of CCM quarterly ‘Sales (Net)’ data.

Output 38.7.1 PERMNO Access of CCM Data

Comparing various access methods for CCM data					
PERMNO=10083 access of CCM data					
Sales (Net)					
Obs	GVKEY	RCALDT	FISCALDT	IQ2	
1	11947	19870331	19870930	4.5680	
2	11947	19870630	19871231	5.0240	
3	11947	19870930	19880331	4.4380	
4	11947	19871231	19880630	3.8090	
5	11947	19880331	19880930	3.5420	
6	11947	19880630	19881230	2.5940	
7	15495	19890331	19890331	6.4660	
8	15495	19890630	19890630	10.1020	
9	15495	19890929	19890929	12.0650	
10	15495	19891229	19891229	10.8780	

```

title2 'GVKEY=11947 and GVKEY=15495 access of CCM data';
title3 'Sales (Net)';

data gvkeyaccess;
  set crsp2.iqitems(keep=gvkey rcaldt fiscaldt iq2);
run;

proc print data=gvkeyaccess;
run;

```

Output 38.7.2 shows GVKEY access of CCM quarterly Sales data.

Output 38.7.2 GVKEY Access of CCM Data

Comparing various access methods for CCM data GVKEY=11947 and GVKEY=15495 access of CCM data Sales (Net)				
Obs	GVKEY	RCALDT	FISCALDT	IQ2
1	11947	19870331	19870930	4.5680
2	11947	19870630	19871231	5.0240
3	11947	19870930	19880331	4.4380
4	11947	19871231	19880630	3.8090
5	11947	19880331	19880930	3.5420
6	11947	19880630	19881230	2.5940
7	11947	19880930	19890331	1.6850
8	11947	19881230	19890630	1.7080
9	15495	19880331	19880331	14.0660
10	15495	19880630	19880630	12.2770
11	15495	19880930	19880930	9.5960
12	15495	19881230	19881230	9.9800
13	15495	19890331	19890331	6.4660
14	15495	19890630	19890630	10.1020
15	15495	19890929	19890929	12.0650
16	15495	19891229	19891229	10.8780

```

title3 'LINK: Link information';
proc print data=crsp2.link;
run;

/* Show how PERMNO and PERMCO access are the same */
title4 'Proc compare of PERMNO vs. PERMCO access of CCM data';
proc compare base=crspla.iqitems compare=crsplb.iqitems brief;
run;

```

Output 38.7.3 shows CRSP link information and comparison of GVKEY to PERMNO access.

Output 38.7.3 Link Information and Comparison

Comparing various access methods for CCM data GVKEY=11947 and GVKEY=15495 access of CCM data LINK: Link information							
Obs	GVKEY	LINKDT	LINKENDT	NPERMNO	NPERMCO	LINKTYPE	LINKFLAG
1	11947	19860305	19890226	10083	8026	LC	BBB
2	15495	19880101	19890226	0	0	NR	XXX
3	15495	19890227	19930909	10083	8026	LC	BBB

Output 38.7.3 *continued*

```

Comparing various access methods for CCM data
GVKEY=11947 and GVKEY=15495 access of CCM data
LINK: Link information
Proc compare of PERMNO vs. PERMCO access of CCM data

The COMPARE Procedure
Comparison of CRSP1A.IQITEMS with CRSP1B.IQITEMS
(Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

```

Example 38.8: Comparing PERMNO and GVKEY Access of CRSP Stock Data

You can access CRSP data using *GVKEYs*. Access in this manner requires the use of the *CRSPLINKPATH=* option, and is identical to access by its corresponding *PERMNO(s)*. Links between *PERMNOs* and *GVKEYs* are used without reference to their active period. Link information is used solely for finding corresponding *GVKEYs*. This example shows two ways of accessing CRSP Stock data: one by *PERMNOs* and the other by its corresponding *GVKEY*. Several members are compared, showing they are equivalent.

```

title 'Comparing PERMNO and GVKEY access of CRSP Stock data';

libname _all_ clear;
libname crsp1 sasecrsp "%sysget (CRSP_MSTK) "
    setid=20
    permno=13638 permno=84641
    range='19900101-19910101';

libname crsp2 sasecrsp "%sysget (CRSP_MSTK) "
    setid=20
    crsplinkpath="%sysget (CRSP_CST) "
    gvkey=1544
    range='19900101-19910101';

title1 'PERMNO=13638 and PERMNO=84641 access of CRSP data';
proc print data=crsp1.stkhead;
run;

%macro compareMember(memb);
    title1 "Proc compare on &memb between PERMNO and GVKEY";
    proc compare base=crsp1.&memb compare=crsp2.&memb brief;
    run;
%mend;

%compareMember(stkhead);
%compareMember(prc);
%compareMember(ret);
%compareMember(askhi);
%compareMember(vol);

```

Output 38.8.1 compares PERMNO with GVKEY access of CRSP Stock members STKHEAD, PRC, RET, ASKHI, AND VOL, showing that they are equal.

Output 38.8.1 Comparing PERMNO and GVKEY Access of CRSP Stock Data

```

PERMNO=13638 and PERMNO=84641 access of CRSP data

Obs   PERMNO   PERMCO   COMPNO   ISSUNO   HEXCD   HSHRCD   HSICCD   BEGDT
1     13638     325   60000324     428     3     11       1310  19721229
2     84641     325   60000324       0     2     11       1382  19970331

Obs   ENDDT   DLSTCD   HCUSIP   HTICK   HCOMNAM
1 19921231   560     97789210           WOLVERINE EXPLORATION CO
2 19980130   231     02351730           AMERAC ENERGY CORP

Obs   HTSYMBOL   HNAICS   HPRIMEXC   HTRDSTAT   HSECSTAT
1   WEXC           Q           A           R
2           A           A           R

Proc compare on stkhead between PERMNO and GVKEY

The COMPARE Procedure
Comparison of CRSP1.STKHEAD with CRSP2.STKHEAD
(Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

Proc compare on prc between PERMNO and GVKEY

The COMPARE Procedure
Comparison of CRSP1.PRC with CRSP2.PRC
(Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

Proc compare on ret between PERMNO and GVKEY

The COMPARE Procedure
Comparison of CRSP1.RET with CRSP2.RET
(Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

Proc compare on askhi between PERMNO and GVKEY

The COMPARE Procedure
Comparison of CRSP1.ASKHI with CRSP2.ASKHI
(Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

```

Output 38.8.1 *continued*

```

Proc compare on vol between PERMNO and GVKEY

      The COMPARE Procedure
Comparison of CRSP1.VOL with CRSP2.VOL
      (Method=EXACT)

NOTE: No unequal values were found. All values compared are exactly equal.

```

Example 38.9: Using Fiscal Date Range Restriction

Fiscal date ranges give you the flexibility of selecting company data by using fiscal year range specifications instead of calendar year range specifications. This example shows how to use this feature to extract data such as the ‘Earnings Per Share’ time series for several companies for the 1994 fiscal year.

```

title 'Extract data for fiscal year 1994 for several companies';

libname _all_ clear;
libname crsp1 sasecrsp "%sysget(CRSP_CST) "
      setid=200
      gvkey=6066 gvkey=12141 gvkey=10107
      range='f19940101-19941231';

data rnd_eps (keep = gvkey rcaldt fiscaldt iq4 iq9 iq19 iq69);
  set crsp1.iqitems;
run;

proc print data=rnd_eps label;
run;

```

Output 38.9.1 shows Earnings Per Share for several companies for the 1994 fiscal year.

Output 38.9.1 Earnings Per Share by GVKEY Access for the 1994 Fiscal Year.

Extract data for fiscal year 1994 for several companies				
Obs	GVKEY	Raw Calendar Trading Date	Fiscal Trading Date	Research and Development Expense
1	6066	19940331	19940331	1100.0000
2	6066	19940630	19940630	1092.0000
3	6066	19940930	19940930	1053.0000
4	6066	19941230	19941230	1118.0000
5	12141	19930930	19940331	134.0000
6	12141	19931231	19940630	150.0000
7	12141	19940331	19940930	156.0000
8	12141	19940630	19941230	170.0000
9	10107	19940331	19940331	A
10	10107	19940630	19940630	A
11	10107	19940930	19940930	A
12	10107	19941230	19941230	100.9630

Obs	Earnings Per Share (Diluted) - Excluding Extraordinary Items	Earnings Per Share (Basic) - Excluding Extraordinary Items	Net Income (Loss)
1	0.6300	0.6400	392.0000
2	1.1300	1.1400	688.0000
3	1.1600	1.1800	710.0000
4	2.0300	2.0600	1231.0000
5	0.7900	0.7900	239.0000
6	0.9500	0.9500	289.0000
7	0.8400	0.8400	256.0000
8	0.5900	0.5900	362.0000
9	0.4600	0.4600	11.3890
10	0.7100	0.7100	17.3670
11	0.7600	0.7600	18.8070
12	0.5400	0.5400	13.4190

Note how two time ID variables are kept. Raw Calendar Trading Date provides the actual calendar date. Fiscal Trading Date provides the date according to the company's fiscal calendar which is dependent upon when its fiscal year-end month is. For example, Observation 8 is Microsoft's fourth fiscal quarter, hence a Fiscal Trading Date of December 30, 1994. Since Microsoft's fiscal year ends in June, its fourth fiscal quarter corresponds to the second calendar quarter of the year, so the Raw Calendar Trading Date shows June 30, 1994. The shift calculation of six months (in this case) required to compute the Raw Calendar Trading Date is done automatically by the SASECRSP engine. Keep in mind that fiscal date ranges are applicable only to fiscal members. When fiscal date range restrictions are applied to nonfiscal members, they are ignored. The missing value 'A' seen in observations 9 through 12 indicate that the data is reported only on an annual basis.

Example 38.10: Using Different Types of Range Restrictions in the INSET

You can specify both calendar and fiscal date range restrictions with the INSET= option. This example shows how to use both types of date range restrictions.

Two *INSETs*, nearly identical except for the type of their date range restriction, are used for accessing the same database. Despite the many similarities, the different date range restriction types result in dissimilar output.

Note that the specification of the datatype in the INSET= option for *comp_calendar* is not required. The datatype default is the calendar type.

```
data comp_fiscal;

    /* Crude Petroleum & Natural Gas */
    compkey=2416;
    begdate=19860101; enddate=19861231;
    datatype='fiscal';
    output;

    /* Commercial Intertech */
    compkey=3248;
    begdate=19940101; enddate=19941231;
    datatype='fiscal';
    output;
run;

data comp_calendar;

    /* Crude Petroleum & Natural Gas */
    compkey=2416;
    begdate=19860101; enddate=19861231;
    datatype='calendar';    output;

    /* Commercial Intertech */
    compkey=3248;
    begdate=19940101; enddate=19941231;
    datatype='calendar';
    output;
run;

libname _all_ clear;
libname fisclib sasecrsp "%sysget (CRSP_CST) "
    SETID=200
    INSET='comp_fiscal, compkey, gvkey, begdate, enddate, datatype';

libname callib sasecrsp "%sysget (CRSP_CST) "
    SETID=200
    INSET='comp_calendar, compkey, gvkey, begdate, enddate, datatype';

title1 'Quarterly Period Descriptors';
title2 'Using the Fiscal Date Range';
```



```
proc print data=fisclib.qperdes(drop = peftnt1 peftnt2 peftnt3 peftnt4
                                peftnt5 peftnt6 peftnt7 peftnt8
                                candxc flowcd spbond spdebt sppaper);
run;
```

Output 38.10.1 shows quarterly period descriptors for the 1986 and 1994 fiscal years.

Output 38.10.1 Using Inset with Fiscal Date Range

Quarterly Period Descriptors Using the Fiscal Date Range							
Obs	GVKEY	CRSPDT	RCALDT	FISCALDT	DATYR	DATQTR	FISCYR
1	2416	242	19860630	19860331	1986	1	3
2	2416	243	19860930	19860630	1986	2	3
3	2416	244	19861231	19860930	1986	3	3
4	2416	245	19870331	19861231	1986	4	3
5	3248	274	19940131	19940331	1994	1	10
6	3248	275	19940429	19940630	1994	2	10
7	3248	276	19940729	19940930	1994	3	10
8	3248	277	19941031	19941230	1994	4	10

Obs	CALYR	CALQTR	UPCODE	SRCDOC	SPRANK	MAJIND	INDIND	REPDT
1	1986	2	3	53	17	0	0	0
2	1986	3	3	53	18	0	0	0
3	1986	4	3	53	18	0	0	0
4	1987	1	3	53	21	0	0	0
5	1993	4	3	53	16	0	0	1994054
6	1994	1	3	53	16	0	0	1994146
7	1994	2	3	53	16	0	0	1994236
8	1994	3	3	53	16	0	0	1994349

The next PRINT procedure uses the calendar datatype in its INSET= option instead of the fiscal datatype, producing different results for the Crude Petroleum and Natural Gas Company when the report is based on calendar dates instead of fiscal dates. The differences shown in observations 1 through 4 are due to Crude Petroleum and Natural Gas Company's fiscal year ending in March instead of December.

Since Commercial Intertech does not shift its fiscal year, but uses a fiscal year ending in December, the fiscal report and the calendar report match exactly for the company's corresponding observations 5 through 8 in Output 38.10.1 and Output 38.10.2 respectively.

```
title1 'Quarterly Period Descriptors';
title2 'Using the Calendar Date Range';
proc print data=callib.qperdes(drop = peftnt1 peftnt2 peftnt3 peftnt4
                                peftnt5 peftnt6 peftnt7 peftnt8
                                candxc flowcd spbond spdebt sppaper);
run;
```

Output 38.10.2 shows quarterly period descriptors for the designated calendar date range.

Output 38.10.2 Using Inset with Calendar Date Range

Quarterly Period Descriptors Using the Calendar Date Range							
Obs	GVKEY	CRSPDT	RCALDT	FISCALDT	DATYR	DATQTR	FISCYR
1	2416	241	19860331	19851231	1985	4	3
2	2416	242	19860630	19860331	1986	1	3
3	2416	243	19860930	19860630	1986	2	3
4	2416	244	19861231	19860930	1986	3	3
5	3248	274	19940131	19940331	1994	1	10
6	3248	275	19940429	19940630	1994	2	10
7	3248	276	19940729	19940930	1994	3	10
8	3248	277	19941031	19941230	1994	4	10

Obs	CALYR	CALQTR	UPCODE	SRCDOC	SPRANK	MAJIND	INDIND	REPDT
1	1986	1	3	53	17	0	0	0
2	1986	2	3	53	17	0	0	0
3	1986	3	3	53	18	0	0	0
4	1986	4	3	53	18	0	0	0
5	1993	4	3	53	16	0	0	1994054
6	1994	1	3	53	16	0	0	1994146
7	1994	2	3	53	16	0	0	1994236
8	1994	3	3	53	16	0	0	1994349

Fiscal date range restrictions are valid only for fiscal members and can be used in either the INSET= option or the RANGE= option. Use calendar date ranges for nonfiscal members. **NOTE:** Fiscal date ranges are ignored when used with nonfiscal members.

Example 38.11: Using INSET Ranges with the LIBNAME RANGE Option

It is possible to specify both individual range restrictions with an INSET and a global date range restriction via the RANGE= option on the LIBNAME statement. In such cases, only observations that satisfy *both* date range restrictions are returned. The effective range restriction becomes the intersection of the two specified range restrictions. If this intersection is empty, no observations are returned.

This example extracts data for two companies, IBM and Microsoft. Each company has an individual range restriction specified in the inset. Furthermore, a global range restriction is set by the RANGE= option on the LIBNAME statement. As a result the effective date range restriction for IBM becomes August 1, 1999, to February 1, 2000, and the effective date range restriction for Microsoft becomes January 1, 2001, to April 21, 2002.

```
data two_companies;
    gvkey=6066; date1=19800101; date2=20000201; output;
    gvkey=12141; date1=20010101; date2=20051231; output;
run;

libname _all_ clear;
```

```

libname mylib sasecrsp "%sysget (CRSP_CST) "
      SETID=200
      INSET='two_companies,gvkey,gvkey,date1,date2'
      RANGE='19990801-20020421';

title1 'Two Companies, Two Range Selections';
title2 'Global RANGE Statement Used With Individual Inset Ranges';
title3 'Results Show Intersection of Both Range Restrictions';
proc sql;
  select prcc.gvkey,prcc.caldt,prcc.ern
    from mylib.prcc as prcc, mylib.ern as ern
   where prcc.caldt = ern.caldt and
         prcc.gvkey = ern.gvkey;
quit;

```

Output 38.11.1 shows the combined effect of both INSET and RANGE date restrictions on the closing prices and earnings per share for IBM and Microsoft.

Output 38.11.1 Mixing INSET Ranges with the RANGE= Option

Two Companies, Two Range Selections			
Global RANGE Statement Used With Individual Inset Ranges			
Results Show Intersection of Both Range Restrictions			
GVKEY	Calendar Trading Date	Closing Price	Earnings Per Share
6066	19990831	124.5625	4.1950
6066	19990930	121.0000	4.3650
6066	19991029	98.2500	4.3650
6066	19991130	103.0625	4.3650
6066	19991231	107.8750	4.2500
6066	20000131	112.2500	4.2500
12141	20010131	30.5313	0.9500
12141	20010228	29.5000	0.9500
12141	20010330	27.3438	0.9500
12141	20010430	33.8750	0.9500
12141	20010531	34.5900	0.9500
12141	20010629	36.5000	0.7250
12141	20010731	33.0950	0.7250
12141	20010831	28.5250	0.7250
12141	20010928	25.5850	0.6000
12141	20011031	29.0750	0.6000
12141	20011130	32.1050	0.6000
12141	20011231	33.1250	0.5650
12141	20020131	31.8550	0.5650
12141	20020228	29.1700	0.5650
12141	20020328	30.1550	0.5900

For more about using the SQL procedure, see the chapter on SQL in *Base SAS Procedures Guide*.

References

Center for Research in Security Prices (2003), *CRSP/Compustat Merged Database Guide*, Chicago: The University of Chicago Graduate School of Business.

Center for Research in Security Prices (2003), *CRSP Data Description Guide*, Chicago: The University of Chicago Graduate School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Center for Research in Security Prices (2002), *CRSP Programmer's Guide*, Chicago: The University of Chicago Graduate School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Center for Research in Security Prices (2003), *CRSPAccess Database Format Release Notes*, Chicago: The University of Chicago Graduate School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Center for Research in Security Prices (2003), *CRSP Utilities Guide*, Chicago: The University of Chicago Graduate School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Center for Research in Security Prices (2002), *CRSP SFA Guide*, Chicago: The University of Chicago Graduate School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chapter 39

The SASEXCCM Interface Engine (Experimental)

Contents

Overview: SASEXCCM Interface Engine	2677
Getting Started: SASEXCCM Interface Engine	2678
Syntax: SASEXCCM Interface Engine	2680
The LIBNAME <i>libref</i> SASEXCCM Statement	2680
Details: SASEXCCM Interface Engine	2684
SAS Output Data Set	2684
Missing Values	2684
Data Reference: Introduction	2685
CCM Data Items	2685
CCM Keysets	2686
CCM Data Groups	2687
Daily STK Data Items	2688
Daily STK Data Groups	2689
Monthly STK Data Items	2690
Monthly STK Data Groups	2691
IND Group Data Item Names	2691
Monthly IND Group Data Group Names	2692
Daily IND Group Data Group Names	2692
IND Time Series Data Item Names	2692
Monthly IND Time Series Data Group Names	2693
Daily IND Time Series Data Group Names	2693
Daily and Monthly TRS Data Item Names	2694
US TRS Data Group Names	2694
Examples: SASEXCCM Interface Engine	2695
Example 39.1: Retrieving SALE Data for One GVKEY	2695
Example 39.2: Retrieving SALE Data for Multiple Companies	2695
Example 39.3: Retrieving Data in Different Keysets	2697
Example 39.4: Retrieving Items with Global Options	2698
Example 39.5: Retrieving All GVKEYs and Company Names	2699
Example 39.6: Retrieving Stock Time Series by PERMNO	2703
Example 39.7: Retrieving Stock and Indices Monthly Time Series by INDNO	2704
Example 39.8: Retrieving Stock and Indices Daily Time Series by INDNO	2706

Example 39.9: Retrieving Information for Availability of Group INDNOs	2707
Example 39.10: Retrieving Daily Group Time Series by INDNO= Option	2708
Example 39.11: Retrieving Monthly Group Time Series by INDNO= Option	2710
Example 39.12: Retrieving Monthly Treasury Time Series by TREASNO= Option . .	2713
References	2715

Overview: SASEXCCM Interface Engine

The SASEXCCM interface engine enables SAS users to access the CRSP/Compustat Merged (CCM) Database created from data delivered via Compustat's Xpressfeed product, the CRSP US Stock (STK) Database, the CRSP US Stock and Indices (IND) Database, and the CRSP US Treasury (TRS) Database. SASEXCCM provides a seamless interface for CRSP, Compustat, and SAS data processing.

The SASEXCCM engine uses the LIBNAME statement to specify which database to open and what parts of the database to access.

To specify the database, you supply the combination of a physical path to indicate the location of the data files (CCM, STK, IND, or TRS data) and a set identifier (SETID) to identify the database that you want to access from those available at the physical path. SASEXCCM supports data-item-handling access methods for the SETIDs in [Table 39.1](#).

Use the SASECRSP engine for all legacy data access (CRSPAccess 299 and earlier) and for any other SETIDs that are not contained in [Table 39.1](#).

Table 39.1 CRSP Database SETIDs

SETID	Data Set
10	CRSP Stock, daily data
20	CRSP Stock, monthly data
100	CRSP US Treasury, monthly and daily data
250	CRSP/Compustat Merged data (CCM)
400	CRSP Indices data, monthly index groups
420	CRSP Indices data, monthly index series
440	CRSP Indices data, daily index groups
460	CRSP Indices data, daily index series

Getting Started: SASEXCCM Interface Engine

To specify what parts of the database to access, you supply two things: the appropriate keys for companies or securities you want to access, and the list of data items you want to retrieve.

When accessing CCM data, you select the companies you want to access by specifying the GVKEY for each company. GVKEY is Compustat's unique identifier and primary key. You use the GVKEY= option to specify which GVKEY to include. If no GVKEYs are specified, data for all companies are retrieved. You can use this feature to obtain a list of all companies (including their name and GVKEY) in the CCM database, as shown in [Example 39.5](#).

For example, the following statements access the CCM database for annual sales data for IBM (GVKEY=6066) and Microsoft (GVKEY=12141):

```
LIBNAME myLib sasexccm 'physical-name'
  SETID=250
  GVKEY=6066    /* IBM */
  GVKEY=12141  /* MSFT */
  ITEMLIST='SALE';
data yrlysale;
  set myLib.annitem;
run;
```

When accessing CRSP Stock (STK) data, you select the securities you want to access by specifying their PERMNOs. You specify a PERMNO to include with the PERMNO= option. If no PERMNOs are specified, data for all securities in the database are retrieved. You can use this feature to obtain a list of all PERMNOs in the STK database.

For example, the following statements access the STK database for monthly shares data for IBM (permno=12490) and Microsoft (permno=10107):

```
LIBNAME myLib sasexccm 'physical-name'
  SETID=20
  PERMNO=12490 /* IBM */
  PERMNO=10107 /* MSFT */
  ITEMLIST="MSHROUT.*;MSHRFLG.*";
data mshares_all;
  set myLib.mshares;
run;
```

When accessing CRSP Indices (IND) data, you select the security and indices data from the CRSP Daily or Monthly Stock and Indices database by specifying their INDNOs. You specify an INDNO to include with the INDNO= option. If no INDNOs are specified, data for all securities in the database are retrieved. You can use this feature to obtain a list of all INDNOs in the CRSP Stock Indices (IND) database.

For example, the following statements access the IND database for monthly consumer price index data (INDNO=1000709):


```
LIBNAME myLib sasexccm 'physical-name'
SETID=420
INDNO=1000709 /* Consumer Price Index */
ITEMLIST=
  "MREBAL.*;MRBBEGDT.*;MRBENDDT.*;MRUSDCNT.*;MMINID.*;MMAXID.*;MMINSTAT.*";

data mindts_all;
  set myLib.mindhdr;
  set myLib.mrebal;
run;
```

When accessing CRSP US Treasury (TRS) data, you select the securities you want to access by specifying their TREASNOs. You specify a TREASNO to include with the TREASNO= option. If no TREASNOs are specified, data for all securities in the database are retrieved. You can use this feature to obtain a list of all TREASNOs in the CRSP Treasuries (TRS) database.

For example, the following statements access the TRS database for monthly ASK and BID time series data for TREASNOs 202999 and 203666:

```
LIBNAME myLib sasexccm 'physical-name'
SETID=100
TREASNO=202999 TREASNO=203666
ITEMLIST="TMASK.*;TMBID.*";
data mtrsts_all;
  set myLib.trs_mth_ts;
run;
```

To specify the list of data items you want to retrieve, use the ITEMLIST= option. This option accepts a string that denotes a list of interested data items and the reporting format (for example, data format, population source, consolidation level, and so on) in standard CRSP notation using CRSP's unique mnemonic text name *itm_name* and the mnemonic tag *keyset*. For details about CRSP notation, see the section “[The LIBNAME libref SASEXCCM Statement](#)” on page 2680 under the ITEMLIST= option.

After the LIBNAME is assigned, the database is opened. The selected data are organized into groups such as ANNITEM for annual time series data or LINK for event based CRSP/Compustat link data. You can also use the SAS DATA step to perform further subsetting and to store the resulting time series in a SAS data set.

SASEXCCM supports Linux, Solaris, and 32-bit Windows.

Syntax: SASEXCCM Interface Engine

The SASEXCCM engine uses standard engine syntax. Options used by SASEXCCM are summarized in Table 39.2. The SETID= and ITEMLIST= options are required.

Table 39.2 Summary of LIBNAME *libref*

Option	Description
SETID=	Specifies which CRSP database at the physical path to open. See Table 39.1 for the complete list of supported SETIDs.
GVKEY=	Specifies a Compustat GVKEY for accessing CCM data. To select more than one GVKEY, use this option multiple times. See Example 39.1 and Example 39.2.
PERMNO=	Specifies a CRSP PERMNO for accessing STK data. To select more than one PERMNO, use this option multiple times.
INDNO=	Specifies a CRSP INDNO for accessing IND data. To select more than one INDNO, use this option multiple times.
TREASNO=	Specifies a CRSP TREASNO for accessing TRS data. To select more than one TREASNO, use this option multiple times.
TCUSIP=	Specifies a CRSP CUSIP for accessing TRS data. To select more than one TCUSIP, use this option multiple times.
ITEMLIST=	Specifies the selected data items for access. This option accepts a string in standard CRSP notation.

The LIBNAME *libref* SASEXCCM Statement

LIBNAME *libref* **SASEXCCM** '*physical-name*' **SETID=***crsp_setidnumber* *options* ;

The LIBNAME statement assigns a SAS library reference (*libref*) to the physical path of the directory of CRSP data files where the CRSP database you want to open is located. The required *physical-name* argument must end in a slash for UNIX environments and a backslash for Windows environments. The required *SETID=crsp_setidnumber* argument specifies the CRSP database you want to read from. Choose one SETID from eight possible values: 10, 20, 100, 250, 400, 420, 440 and 460.

For example, the following statement accesses the CCM database for annual sales data for IBM (GVKEY=6066):

```
LIBNAME myLib SASEXCCM 'physical-name' SETID=250
      GVKEY=6066 /* IBM */
      ITEMLIST='SALE';
```

After the LIBNAME is assigned, you can access any of the available groups (members) within the opened database:

- STK daily See section “[Daily STK Data Groups](#)” on page 2689 for more information about groups in the Daily Stock Database, SETID 10.
- STK mthly See section “[Monthly STK Data Groups](#)” on page 2691 for more information about groups in the Monthly Stock Database, SETID 20.
- TRS data See section “[US TRS Data Group Names](#)” on page 2694 for more information about groups in the US Treasury Database, SETID 100.
- CCM See section “[CCM Data Groups](#)” on page 2687 for more information about groups in the CRSP/Compustat Merged Databases, SETID 250.
- IND mthly grp See section “[Monthly IND Group Data Group Names](#)” on page 2692 for more information about groups in the Monthly Indices Group Data Database, SETID 400.
- IND mthly ts See section “[Monthly IND Time Series Data Group Names](#)” on page 2693 for more information about groups in the Monthly Indices Time Series Database, SETID 420.
- IND daily grp See section “[Daily IND Group Data Group Names](#)” on page 2692 for more information about groups in the Daily Indices Group Data Database, SETID 440.
- IND daily ts See section “[Daily IND Time Series Data Group Names](#)” on page 2693 for more information about groups in the Daily Indices Time Series Database, SETID 460.

The following *options* can be used in the LIBNAME *libref* SASEXCCM statement:

GVKEY=crsp_gvkey

selects the companies or issues whose data you want to retrieve. Specify the Compustat Permanent SPC Identifier for the *crsp_gvkey*. There is no limit to the number of GVKEY= options that you can use. If no GVKEY= options are specified, all GVKEYs in the database are selected.

For example, the following statement accesses the CCM database for annual sales data for IBM (GVKEY=6066) and Microsoft (GVKEY=12141):

```
LIBNAME myLib sasexccm 'physical-name'
SETID=250
GVKEY=6066 /* IBM */
GVKEY=12141 /* MSFT */
ITEMLIST='SALE' ;
```

PERMNO=crsp_permno

selects the companies or issues whose data you want to retrieve. Specify a CRSP company issue's PERMNO for the *crsp_permno*. There is no limit to the number of PERMNO= options that you can use. If no PERMNO= options are specified, all PERMNOs in the database are selected.

For example, the following statements access the STK database for monthly shares data for IBM (PERMNO=12490) and Microsoft (PERMNO=10107):

```

LIBNAME myLib sasexccm 'physical-name'
SETID=20
PERMNO=12490 /* IBM */
PERMNO=10107 /* MSFT */
ITEMLIST="MSHROUT.*;MSHRFLG.*";
data mshares_all;
  set myLib.mshares;
run;

```

INDNO=crsp_indno

selects the time series or the group data from the index whose data you want to retrieve. Specify a CRSP Index's INDNO for the *crsp_indno*. There is no limit to the number of INDNO= options that you can use. If no INDNO= options are specified, all INDNOs in the database are selected.

For example, the following statements access the IND database for monthly consumer price index data (INDNO=1000709):

```

LIBNAME myLib sasexccm 'physical-name'
SETID=420
INDNO=1000709 /* Consumer Price Index */
ITEMLIST=
  "MREBAL.*;MRBEGDT.*;MRBENDDT.*;MRUSDCNT.*;MMINID.*;MMAXID.*;MMINSTAT.*";

data mindts_all;
  set myLib.mindhdr;
  set myLib.mrebal;
run;

```

TREASNO=crsp_treasno

selects the treasury data items you want to retrieve by TREASNO. Specify a CRSP US Treasury's TREASNO for the *crsp_treasno*. There is no limit to the number of TREASNO= options that you can use. If no TREASNO= options are specified, all TREASNOS in the database are selected.

For example, the following statements access the TRS database for monthly ASK and BID time series data for TREASNOS 202999 and 203666:

```

LIBNAME myLib sasexccm 'physical-name'
SETID=100
TREASNO=202999 TREASNO=203666
ITEMLIST="TMASK.*;TMBID.*";
data mtrsts_all;
  set myLib.trs_mth_ts;
run;

```

TCUSIP=crsp_tcusip

selects the treasury data items you want to retrieve. Specify a CRSP US Treasury TCUSIP for the *crsp_tcusip*. There is no limit to the number of TCUSIP= options that you can use. If no TCUSIP= options are specified, all TCUSIPS in the database are selected.

For example, the following statements access the TRS database for monthly ASK and BID time series data for TCUSIPs 9128272B and 912795XK:

```
LIBNAME myLib sasexccm 'physical-name'
SETID=100
TCUSIP='9128272B' TCUSIP='912795XK'
ITEMLIST="TMASK.*;TMBID.*";
data mtrsts_all;
  set myLib.trs_mth_ts;
run;
```

ITEMLIST="crsp_itemlist"

specifies the items and groups of interest for selection based on keysets, which define the reporting format you want. Specify a string in CRSP standard notation for *crsp_itemlist*. See the section “Data Reference: Introduction” on page 2685 for overview information about items, groups, and reporting formats. Reference sections based on CRSP documentation follow the overview. For more information, see the *CRSP Access User Guide for the CRSP/Compustat Merged Database*, the *CRSP US Stock and Indices Database*, and the *CRSP US Treasury Database*.

The CRSP standard notation has the form:

```
[global_section:]list_section
```

The *list_section* consists of a semicolon-delimited string of list elements in the form:

```
list_element[;list_element]
```

Each *list_element* can be an item or group name. You can also specify a particular keyset for the item or group by appending a period and its keyset number. For example, “sale.2” selects the sales item with keyset 2, which contains the industrial format, consolidated information, and standardized summary data from the latest annual filing.

The optional *global_section* holds flags that modify all elements in the list section. The following flags are recognized:

- f Applicable and populated footnote items are added for every item selected. For example, “f:sale;at;ceq” selects sales, total assets, and common equity items with default keysets and available footnotes for the selected items.
- d Applicable and populated data code items are added for every item selected. For example, “d:sale;at;ceq” selects sales, total assets, and common equity items with default keysets and available data codes for the selected items.
- k.list Applies the list of keysets to all items in the list without a keyset already specified. The list can be either *** to select all available keysets, or *#-#*, *#...* to select keysets by their number. For example, “k.1:sale;at;ceq” selects the default keyset, keyset 1, for all items.

The following full LIBNAME example shows how to access the CCM database for annual sales data and quarterly total assets data for IBM (GVKEY=6066) and Microsoft (GVKEY=12141).

```
LIBNAME myLib sasexccm 'physical-name'
SETID=250
GVKEY=6066 /* IBM */
GVKEY=12141 /* MSFT */
ITEMLIST='f:sale;actq';
```

Details: SASEXCCM Interface Engine

SAS Output Data Set

You can use the SAS DATA step to write the selected CRSP or Compustat data to a SAS data set. This enables you to easily analyze the data using SAS software. Specifying the name of the output data set in the DATA statement causes the engine supervisor to create a SAS data set that has the specified name in either the SAS Work library or, if specified, the User library.

The contents of the SAS data set include the DATE of each observation, the series name of each series read from the CRSPAccess database, event variables, and the label or description of each series, event or array.

You can use the PRINT and CONTENTS procedures to print your output data set and its contents. Alternatively, you can view your SAS output observations by opening the desired output data set in the SAS Explorer window. You can also use the SQL procedure with your SASEXCCM *libref* to create a custom view of your data.

Missing Values

In general, CRSP missing values are represented as ‘.’ in the SAS data set. When accessing the CCM database, SASEXCCM interprets missing values according to the conditions and codes defined by Compustat, and represents them as SAS missing codes, as shown in Table 39.3.

Table 39.3 Mapping of Compustat and SAS Missing Codes

Missing Value	Missing Code	Condition
0.0001	.	No data for data item
0.0002	.S	Data is only on a semi-annual basis
0.0003	.A	Data is only on an annual basis
0.0004	.C	Combined into other item
0.0007	.N	Data is not meaningful
0.0008	.I	Reported as insignificant

Missing value codes conform with Compustat’s Strategic Insight and binary conventions for missing values. See the section "Notes on Missing Values" in the second chapter of the *CRSP/Compustat Merged Database Guide* for more information about how CRSP handles Compustat missing codes.

Data Reference: Introduction

Data reference details are presented for items, keysets, and groups available from four CRSPAccess databases in this order: CCM database, STK databases, IND databases, and TRS database. In addition to summary tables, sample SAS statements show how to generate a customized list of item names available from each group for a particular database.

CCM Data Items

The CRSP/Compustat Merged (CCM) database is organized by company and security according to Compustat's Permanent SPC Identifier, GVKEY. CCM data is broken down into items, and items can be further qualified by a set of secondary keys. CRSP calls these known collections of keys and values a keyset, and it assigns a numeric code and mnemonic tag to each unique collection. Each keyset represents different output series. Items are also organized into groups for selection and presentation. A group can include other groups, or a group can include items. Items can belong to more than one group.

For example, the Compustat data item SALE has secondary keys for industry format, data format, population source, and consolidation level. A different value of company sales can be available for any combination of these keys, such as a combination that represents the originally reported sales or the final restated sales from a later filing. The SALE data item is a part of the ANNITEM (Annual Time Series Items, including footnotes and data codes) group.

The CCM database contains data items provided by Compustat in addition to structures and supplementary data items provided by CRSP. All data items include a mnemonic and field name. This section provides a summary of Compustat data items whose mnemonic name differs in the CCM database, and a summary of the supplementary data items provided by CRSP. For more information about the Compustat data items, refer to your Compustat data documentation or see www.compustatresources.com/support/index.html. For more information about the supplementary CRSP data items, refer to your CCM Database Guide.

Table 39.4 Items with Different CRSP and Compustat Names

Compustat mnemonic	CRSP itm_name	Description	Definition
BETA	XPFBETA	Data item	Xpressfeed beta
DVPSXM	XDVPXSM	Data item	Index monthly dividend
PRC	XPFPRC	Data item	Participation rights certificates
PRCCM	XPRCCM	Data item	Index price close monthly
PRCHM	XPRCHM	Data item	Index price high monthly
PRCLM	XPRCLM	Data item	Index price low monthly
PRC_DC	XPFPRC_DC	Data code	Participation rights certificates data code
PRC_FN	XPFPRC_FN	Footnote	Participation rights certificates footnote
RET	XPFRET	Data item	Total real estate property
RET_DC	XPFRET_DC	Data code	Total real estate property data code
RET_FN	XPFRET_FN	Footnote	Total real estate property footnote
YEAR	YEARQ	Data item	Year quarterly

Supplemental CRSP data items are organized as groups. For a list of the supplemental data groups, see the section “[CCM Data Groups](#)” on page 2687.

CCM Keysets

Compustat items can be qualified by a set of secondary keys. This collection of secondary keys and values creates a keyset that assigns a numeric code and mnemonic tag to each unique collection. Each keyset represents different output series. For example, one keyset might represent originally reported sales while another might represent the final restated sales from a later filing. Full details about keysets can be found in the *CRSP/Compustat Merged Database Guide*. For your convenience, [Table 39.5](#) summarizes the keysets.

Table 39.5 Summary of CCM Keysets

Keyset	Tag	Keyset Description
0		Indices
1	STD	Industrial format, consolidated information, standardized presentation
2	SUMM	Industrial format, consolidated information, standardized summary data (StdSumData) from the latest annual filing
3	PRES	Industrial format, consolidated information, standardized summary data collected prior to company amendment
4	FS	Financial services format, consolidated information, standardized presentation
5	PFO	Industrial format, pro forma reporting, standardized presentation
6	PFAS	Pre-FASB reporting
7	SFAS	Industrial format, pre-FASB reporting, standardized presentation
8	PRE	Industrial format, consolidated information, standardized data collected from the latest annual filing
10	PDIV	Industrial format, pre-divestiture reporting, standardized presentation
11	DOM	Domestic
12	SUPF	Industrial format, pre-FASB reporting, standardized summary data from the latest annual filing
14	STD1	Industrial format, consolidated information, standardized presentation, rank 1
15	FSFO	Financial services format, pro-forma reporting, standardized presentation
16	FS1	Financial services format, consolidated information, standardized presentation, rank 1
17	FS2	Financial services format, consolidated information, standardized presentation, rank 2
18	SUFS	Industrial format, pro-forma reporting, standardized summary data from the latest annual filing
19	PDI1	Industrial format, pre-divestiture reporting, standardized presentation, rank 1
20	PFA1	Industrial format, pre-FASB reporting, standardized presentation, rank 1

Table 39.6 Summary of CCM Keysets (continued)

Keyset	Tag	Keyset Description
21	SUPD	Industrial format, pre-divestiture reporting, standardized summary data from the latest annual filing
22	FS3	Financial services format, consolidated information, standardized presentation, rank 3
23	PDI2	Industrial format, consolidated information, standardized presentation, rank 2
24	CONS	Consolidated information
25	STD2	Industrial format, consolidated information, standardized presentation, rank 2
26	STD3	Industrial format, consolidated information, standardized presentation, rank 3
27	STD4	Industrial format, consolidated information, standardized presentation, rank 4
28	STD5	Industrial format, consolidated information, standardized presentation, rank 5
29	PFA2	Industrial format, pre-FASB Reporting, standardized presentation, rank 2
30	PFA3	Industrial format, pre-FASB reporting, standardized presentation, rank 3
31	CUSD	Calendar-based reporting in US dollars
32	FUSD	Fiscal-based reporting in US dollars
33	CCAD	Calendar-based reporting in Canadian dollars
34	FCAD	Fiscal-based reporting in Canadian dollars
35	PFA4	Industrial format, pre-FASB reporting, standardized presentation, rank 4
36	PFO2	Industrial format, pro-forma reporting, standardized presentation, rank 2
37	PFO1	Industrial format, pro-forma reporting, standardized presentation, rank 1
38	PRE1	Industrial format, consolidated information, standardized data collected before company amendment, rank 1
39	FFO1	Financial services format, pro-forma reporting, standardized presentation, rank 1
40	FS4	Financial services format, consolidated information, standardized presentation, rank 4
41	GICS	Industry code type Global Industry Classification Standard
43	FORD	Pro-forma reporting
44	BSTD	Bank format, consolidated information, standardized presentation
45	BSUMM	Bank format, consolidated information, standardized summary data from the latest annual filing
46	BPFO	Bank format, pro-forma reporting, standard presentation
47	BASTD	Bank format, consolidated information, average standardized presentation
48	BASUMM	Bank format, consolidated information, average standardized summary presentation from the latest annual filing
49	BAPFO	Bank format, pro-forma reporting, average standardized presentation

CCM Data Groups

CCM items are organized into groups for ease of selection and presentation. Each group is given a group name. These names are unique and do not overlay with item names. A group can be made up of either items or other groups. Items can belong to more than one group. [Table 39.7](#) provides a summary of some groups. Refer to your *CCM Database Guide* for more information about CCM data groups.

Table 39.7 Selected Xpressfeed Primary and CRSP Supplemental Groups

Item Name	Description
MASTER	CCM company ID and range data
COMPANY	CCM company header information
IDX_INDEX	CCM idx_index header information
SPIND	Standard & Poor's (S&P) index header (pre-GICS)
COMPHIST	CCM company header history
CSTHIST	CST header history
LINK	Link history
LINKUSED	CCM company CRSP link used data
LINKRNG	CCM company CRSP link range data
ADJFACT	CCM company adjustment factor history
HGIC	CCM company GICS code history
OFFTITL	CCM company officer title data
CCM_FILEDATE	CCM company filing date data
CCM_IPCD	CCM industry presentation code data
SECURITY	CCM security header information
SECHIST	CCM security header history
SEC_MTHSPT	CCM security monthly split events
SEC_MSPT_FN	CCM security monthly split event footnotes
SEC_MDIV_FN	CCM security monthly dividend event footnotes
SEC_SPIND	CCM security S&P information events
IDXCST_HIS	CCM security historical index constituents
SPIDX_CST	CCM security S&P index constituent events
CCM_SEG_CUR	CCM operating segment currency rate data
CCM_SEG_SRC	CCM operating segment source data
CCM_SEG_PROD	CCM operating segment product data
CCM_SEG_CUST	CCM operating segment customer data
CCM_SEG_DTL	CCM operating segment detail data
CCM_SEG_ITM	CCM operating segment item data
CCM_SEG_NAICS	CCM operating segment NAICS data
CCM_SEG_GEO	CCM operating segment geographic data

Daily STK Data Items

You can generate a customized list of item names available in the daily stock database (SETID=10) by running the following sample statements for each group name in [Table 39.9](#):

```
libname dstock sasexccm
    "\\bb04smb01\thirdparty\lnx\crspdata\DI201006\"
    setid=10 permno=12490
    itemlist="group_name.*";

proc contents data=dstock.group_name; run;
```

The following statements generate an item list of all the item names available in the group named STKHDR_ID:

```
libname crsp sasexccm
    "\\bb04smb01\thirdparty\lnx\crspdata\DI201006\"
    setid=10 permno=12490
    itemlist="STKHDR_ID.*";

proc contents data=crsp.stkhdr_id; run;
```

The item names in group STKHDR_ID are listed in [Table 39.8](#).

Table 39.8 US Daily Stock Items in Group STKHDR_ID

Item Name	Description
BEGDT	Begdt
COMPNO	COMPNO
CUSIP	CUSIP
ENDDT	Enddt
HCOMNAM	Latest company name
HDLSTCD	DEL
HEXCD	EX
HPRIMEXCH	Ex1
HSECSTAT	Sst
HSHRCD	SH
HSICCD	SIC
HSNAICS	Naics
HSUBEXCH	Ex2
HTICK	Htick
HTRDSTAT	Tst
HTSYMBOL	Symbol
ISSUNO	Issuno
KYPERMNO	PERMNO
PERMCO	PERMCO
PERMNO	PERMNO

Daily STK Data Groups

Daily stock groups are shown in [Table 39.9](#).

Table 39.9 US Daily Stock Group Names

Group Name	Description
STKHDR_ID	Stock header (summary)
STKHDR_ALL	All stock headers
STKHDR_RNG	Stock header plus ranges
LSTKHDR_RNG	Stock header plus calendar index ranges
NAMES_SHORT	Name history (short list)
NAMES	Name history
NAMES_ALL	All names
DISTS	Distribution events
ADJDISTS	Daily adjusted distribution events
SHARES	Shares outstanding observations
RSHARES	Raw shares outstanding observations
ADJSHARES	Daily adjusted shares outstanding observations
DELIST	Delisting history
ADJDELIST	Adjusted delisting events
NASDIN	NASDAQ information history
DLY_DATA	Daily price summary time series
DLY_ADJDATA	Daily adjusted price summary time series
DSTK_TS	Daily time series
DLY_WGT	Daily price, shares, and returns
DLY_ADJ_WGT	Daily adjusted price, shares, and returns
DLY_LVL	Daily index level
DLY_RET	Daily returns
PORTF	Portfolio data
GROUP	Group membership data
DLY_TS_NAT	Daily time series (native only)
DSTK_VOLUME	Volume
DSTK_CAP	Capitalization

Monthly STK Data Items

You can generate a customized list of item names available in the monthly stock database by running the following sample statements for each group name in [Table 39.10](#):

```
libname crsp sasexccm
  "\\tappan\crsp1\data201008_little\MIZ201006\"
  setid=20 permno=12490
  itemlist="group_name.*";

proc contents data=crsp.group_name; run;
```

Monthly STK Data Groups

Monthly stock groups are shown in [Table 39.10](#).

Table 39.10 US Monthly Stock Group Names

Group Name	Description
MSTKHDR_ID	Stock header (summary)
MSTKHDR_RNG	Stock header plus ranges
LMSTKHDR_RNG	Stock header plus calendar index ranges
MNAMES_SHORT	Name history (short list)
MNAMES	Name history
MNAMES_ALL	All mnames
MDISTS	Distribution events
MADJDISTS	Monthly adjusted distribution events
MSHARES	Shares outstanding observations
RMSHARES	Raw shares outstanding observations
MADJSHARES	Monthly adjusted shares outstanding observations
MDELIST	Delisting history
MADJDELIST	Adjusted delisting events
MNASDIN	NASDAQ information history
MTH_DATA	Monthly price summary time series
MTH_ADJDATA	Monthly adjusted price summary time series
MTH_TS	Monthly time series
MTH_WGT	Monthly price, shares, and returns
MTH_ADJ_WGT	Monthly adjusted price, shares, and returns
MTH_LVL	Monthly index level
MTH_RET	Monthly returns
MPORTF	Portfolio data
MGROUP	Group membership data
MTH_TS_NAT	Monthly time series (native only)
MSTK_VOLUME	Volume
MSTK_CAP	Capitalization

IND Group Data Item Names

You can generate a customized list of available Indices group data item names by running the following sample statements for each daily or monthly group name from [Table 39.11](#) or [Table 39.12](#), and substituting the corresponding SETID, data path, and actual daily (or monthly) group name for the **group_name**.

```
libname crsp sasexccm
  "\\bb04smb01\thirdparty\lnx\crspdata\DI2201006\"
  setid=440
  indno=1000040
```

```

itemlist="group_name.*";

proc contents data=crsp.group_name; run;

```

Monthly IND Group Data Group Names

The monthly group indices data consists of the groups listed in [Table 39.11](#).

Table 39.11 US IND Monthly Group Data Group Names

Group Name	Description
MINDHDRG	Monthly index group header
MINDSUMMG	Monthly index group summary
MLISTG	Monthly index group list history
MREBALG	Monthly index group rebalancing history
MREBALG_ALL	Monthly index group rebalancing
MTHGIND_LVL	Monthly index group levels
MTHGIND_RET	Monthly index group returns
MTHGIND_TS	Monthly index group series
MTHGIND_VAL	Monthly index group values

Daily IND Group Data Group Names

The daily group indices data consists of the groups listed in [Table 39.12](#).

Table 39.12 US IND Daily Group Data Group Names

Group Name	Description
INDHDRG	Index group header
INDSUMMG	Index group summary
LISTG	Index group list history
REBALG	Index group rebalancing history
REBALG_ALL	Index group rebalancing
DLYGIND_LVL	Index group levels
DLYGIND_RET	Index group returns
DLYGIND_TS	Index group series
DLYGIND_VAL	Index group values

IND Time Series Data Item Names

You can generate a customized list of available item names by running the following sample statements for each daily or monthly time series group name from [Table 39.13](#) or [Table 39.14](#), and substituting the

corresponding SETID, data path, and actual daily (or monthly) time series group name for the **group_name**.

```
libname daycrsp sasexccm
    "\\bb04smb01\thirdparty\lnx\crspdata\DI201006\"
    setid=460
    indno=1000040
    itemlist="group_name.*";

proc contents data=daycrsp.group_name; run;
```

Monthly IND Time Series Data Group Names

The monthly indices data consists of the groups listed in [Table 39.13](#).

Table 39.13 US IND Monthly Series Data Group Names

Group Name	Description
MINDHDR	Monthly index header
MINDSUMM	Monthly index summary
MLIST	Monthly index list history
MREBAL	Monthly index rebalancing history
MREBAL_ALL	Monthly index rebalancing
MTHIND_LVL	Monthly index levels
MTHIND_RET	Monthly index returns
MTHIND_TS	Monthly index series
MTHIND_VAL	Monthly index values

Daily IND Time Series Data Group Names

The daily indices data consists of the groups listed in [Table 39.14](#).

Table 39.14 US IND Daily Time Series Data Group Names

Group Name	Description
INDHDR	Index header
INDSUMM	Index summary
LIST	Index list history
REBAL	Index rebalancing history
REBAL_ALL	Index rebalancing
DLYIND_LVL	Index levels
DLYIND_RET	Index returns
DLYIND_TS	Index series
DLYIND_VAL	Index values

Daily and Monthly TRS Data Item Names

You can generate a customized list of allowed item names by running the following sample statements for each daily or monthly group name in [Table 39.15](#), and substituting the actual daily or monthly group name for the `group_name`.

```
libname crsp sasexccm
    "\\tappan\crsp1\data201008_little\TRZ201008\"
    setid=100
    treasno=202999
    itemlist="group_name.*";

proc contents data=crsp.group_name; run;
```

US TRS Data Group Names

The US Treasury data consists of the groups listed in [Table 39.15](#).

Table 39.15 US Treasury Data Groupnames

Group Name	Description
TRS_MASTER	Master items
TRS_ISSUE	TREASNO properties
TRS_IDX	TREASNOX properties
TRS_PAY	Payments
TRS_DLY	Daily treasury
TRS_DLY_ISS	Issue items
TRS_DLY_FT	Fixed term
TRS_MTH	Monthly treasury
TRS_MTH_ISS	Monthly issue items
TRS_MTH_BP	Monthly bond portfolios
TRS_MTH_FB	Monthly Fama-Bliss
TRS_MTH_FT	Monthly fixed term
TRS_MTH_RF	Riskfree
TRS_MTH_TERM	Monthly term structure
TRS_RATE	Rates
TRS_MTH_TS	Monthly time series
TRS_DLY_TS	Daily time series

Examples: SASEXCCM Interface Engine

Example 39.1: Retrieving SALE Data for One GVKEY

This simple example shows how to retrieve SALE data for one particular GVKEY=6066 (IBM). Since the ITEMLIST= option does not specify a keyset, the default (standard) keyset, KEYSET_TAG=STD, is selected. For brevity, a subset of the data with the most recent figures is specified by the WHERE statement.

```

title 'Retrieve SALE data for IBM';
libname _all_ clear;

libname crsp sasexccm "%sysget(CRSP_CCM) "
    setid=250
    gvkey=6066
    itemlist="sale";

data recentsales;
    set crsp.annitem;
    where datadate >= '1jan2000'd;

proc print data=recentsales;
run;

```

Output 39.1.1 SALE Data for GVKEY=6066

Retrieve SALE data for IBM					
Obs	KYGVKEY	KEYSET_ TAG	DATADATE	SALE	
1	6066	STD	20001229	88396.0000	
2	6066	STD	20011231	85866.0000	
3	6066	STD	20021231	81186.0000	
4	6066	STD	20031231	89131.0000	
5	6066	STD	20041231	96293.0000	
6	6066	STD	20051230	91134.0000	
7	6066	STD	20061229	91424.0000	
8	6066	STD	20071231	98786.0000	

Example 39.2: Retrieving SALE Data for Multiple Companies

This example shows how to retrieve several data items for several GVKEYs. Note how the item `offtit1` is not an annual item and is stored in its own member. The default (standard) keyset is used for all items. For brevity, a subset of the data with the most recent figures is specified by the WHERE statement.

```

title 'Retrieve Sales, Revenue, Liabilities, and Officer data for IBM and MSFT';
libname _all_ clear;

libname crsp sasexccm "%sysget(CRSP_CCM) "
    setid=250
    gvkey=6066
    gvkey=12141
    itemlist="sale;revt;lct;offtitl";

data recentannitems;
    set crsp.annitem;
    where datadate >= '1jan2000'd;

proc print data=recentannitems;
proc print data=crsp.offtitl;
run;

```

Output 39.2.1 Data Items for IBM and Microsoft

Retrieve Sales, Revenue, Liabilities, and Officer data for IBM and MSFT						
Obs	KYGVKEY	KEYSET_ TAG	DATADATE	SALE	REVT	LCT
1	6066	STD	20001229	88396.0000	88396.0000	36406.0000
2	6066	STD	20011231	85866.0000	85866.0000	35119.0000
3	6066	STD	20021231	81186.0000	81186.0000	34550.0000
4	6066	STD	20031231	89131.0000	89131.0000	37900.0000
5	6066	STD	20041231	96293.0000	96293.0000	39798.0000
6	6066	STD	20051230	91134.0000	91134.0000	35152.0000
7	6066	STD	20061229	91424.0000	91424.0000	40091.0000
8	6066	STD	20071231	98786.0000	98786.0000	44310.0000
9	12141	STD	20000630	22956.0000	22956.0000	9755.0000
10	12141	STD	20010629	25296.0000	25296.0000	11132.0000
11	12141	STD	20020628	28365.0000	28365.0000	12744.0000
12	12141	STD	20030630	32187.0000	32187.0000	13974.0000
13	12141	STD	20040630	36835.0000	36835.0000	14969.0000
14	12141	STD	20050630	39788.0000	39788.0000	16877.0000
15	12141	STD	20060630	44282.0000	44282.0000	22442.0000
16	12141	STD	20070629	51122.0000	51122.0000	23754.0000

Output 39.2.1 *continued*

Retrieve Sales, Revenue, Liabilities, and Officer data for IBM and MSFT				
Obs	KYGVKEY	OFID	OFCD	OFNM
1	6066	19923	CB	Samuel J. Palmisano
2	6066	19923	CE	Samuel J. Palmisano
3	6066	19923	DI	Samuel J. Palmisano
4	6066	19923	PR	Samuel J. Palmisano
5	6066	145583	CR	Timothy S. Shaughnessy
6	6066	145583	VP	Timothy S. Shaughnessy
7	6066	145584	CF	Mark Loughridge
8	6066	145584	SP	Mark Loughridge
9	6066	167114	EP	Nicholas M. Donofrio
10	12141	64144	CB	William H. Gates III
11	12141	64144	DI	William H. Gates III
12	12141	64147	CE	Steven A. Ballmer
13	12141	64147	DI	Steven A. Ballmer
14	12141	152605	CF	Christopher P. Liddell
15	12141	152605	SP	Christopher P. Liddell
16	12141	175292	CO	Brian Kevin Turner

Example 39.3: Retrieving Data in Different Keysets

This example shows how to retrieve several data items in different keysets. The ITEMLIST= option asks for data on research and development (R&D) expenses, XRD, and net income, NI, over all available keysets by using the `itm_name.*` syntax in the ITEMLIST= option. Note that data is not available for all items in all keysets. For brevity, a subset of the data with the most recent figures is specified by the WHERE statement.

```

title 'Retrieve R&D Expenses and Net Income for IBM';
libname _all_ clear;

libname crsp sasexccm "%sysget(CRSP_CCM) "
    setid=250
    gvkey=6066
    itemlist="xrd.*;ni.*";

data recent;
    set crsp.annitem;
    where datadate >= '1jan2001'd;

proc print data=recent;
run;
```

Output 39.3.1 R&D Expenses and Net Income for GVKEY=6066

Retrieve R&D Expenses and Net Income for IBM					
Obs	KYGVKEY	KEYSET_ TAG	DATADATE	XRD	NI
1	6066	STD	20011231	4620.0000	7723.0000
2	6066	STD	20021231	4754.0000	3579.0000
3	6066	STD	20031231	5077.0000	7583.0000
4	6066	STD	20041231	5167.0000	8430.0000
5	6066	STD	20051230	5379.0000	7934.0000
6	6066	STD	20061229	5682.0000	9492.0000
7	6066	STD	20071231	5754.0000	10418.0000
8	6066	SUMM	20011231	.	6484.0000
9	6066	SUMM	20021231	.	2376.0000
10	6066	SUMM	20031231	.	6558.0000
11	6066	SUMM	20041231	.	7479.0000
12	6066	SUMM	20051230	.	7934.0000
13	6066	SUMM	20061229	.	9492.0000
14	6066	SUMM	20071231	.	10418.0000

Example 39.4: Retrieving Items with Global Options

This example shows how to retrieve data on total assets (ATQ) and after tax gain or loss (GLAQ) with the global option for turning on footnote items, which uses the following syntax:

```
ITEMLIST="f:itm_name1;itm_name2;...itm_nameN"
```

The default (standard) keyset is used for all items. For brevity, a subset of the data with the most recent figures is specified by the WHERE statement.

```
title 'Retrieve data for IBM with Footnotes';
libname _all_ clear;

libname crsp sasexccm "%sysget(CRSP_CCM) "
    setid=250
    gvkey=6066
    itemlist="f:atq;glaq";

data recent;
    set crsp.qtritem;
    where datadate >= '1jan2004'd;

proc print data=recent;
run;
```

Output 39.4.1 Data Items with Footnotes

Retrieve data for IBM with Footnotes								
Obs	KYGVKEY	KEYSET_ TAG	DATADATE	ATQ	ATQ_FN1	GLAQ	GLAQ_FN	
1	6066	STD	20040331	101825.0000	JR	.		
2	6066	STD	20040630	99582.0000	JR	.		
3	6066	STD	20040930	100676.0000	JR	.		
4	6066	STD	20041231	109183.0000	JR	.		
5	6066	STD	20050331	104899.0000		.		
6	6066	STD	20050630	103388.0000		732.5550	NC	
7	6066	STD	20050930	101009.0000		0.0000	NC	
8	6066	STD	20051230	105748.0000		0.0000	NC	
9	6066	STD	20060331	102468.0000		.		
10	6066	STD	20060630	103377.0000		.		
11	6066	STD	20060929	104155.0000		.		
12	6066	STD	20061229	103234.0000		29.2500	NR	
13	6066	STD	20070330	101619.0000		.		
14	6066	STD	20070629	102548.0000		81.0000		
15	6066	STD	20070928	108609.0000		0.0000		
16	6066	STD	20071231	120431.0000		0.0000		
17	6066	STD	20080331	121823.0000		.		

Example 39.5: Retrieving All GVKEYs and Company Names

This example shows how to retrieve the GVKEY and name for every company in the CCM database.

```

title 'Retrieve All GVKEYs and Company Names';
libname _all_ clear;

libname crsp sasexccm "%sysget(CRSP_CCM) "
      setid=250
      itemlist="company";

proc contents data=crsp.company;
proc print data=crsp.company(keep=kygvkey conm obs=20);
run;

```

For brevity, only the first 20 observations are shown, and only KYGVKEY and CONM are kept in [Output 39.5.1](#).

Output 39.5.1 First 20 GVKEYS and Company Names

Retrieve All GVKEYs and Company Names			
The CONTENTS Procedure			
Data Set Name	CRSP.COMPANY	Observations	.
Member Type	DATA	Variables	38
Engine	SASXCCM	Indexes	0
Created	Wed, Feb 16, 2011 02:14:52 PM	Observation Length	3232
Last Modified	Wed, Feb 16, 2011 02:14:52 PM	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	Default		
Encoding	Default		

Output 39.5.1 *continued*

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
33	ADD1	Char	68	65.	65.	ADD1
34	ADD2	Char	68	65.	65.	ADD2
35	ADD3	Char	68	65.	65.	ADD3
36	ADD4	Char	68	65.	65.	ADD4
37	ADDZIP	Char	24	24.	24.	ADDZIP
38	BUSDESC	Char	2000	2000.	2000.	BUSDESC
2	CIK	Char	12	10.	10.	CIK
20	CITY	Char	104	104.	104.	CITY
5	CONM	Char	256	255.	255.	CONM
29	CONML	Char	104	100.	100.	CONML
7	COSTAT	Char	4	1.	1.	COSTAT
19	COUNTY	Char	104	100.	100.	COUNTY
9	DLDTE	Num	8	8.	8.	DLDTE
10	DLRSN	Char	12	8.	8.	DLRSN
3	EIN	Char	12	10.	10.	EIN
32	FAX	Char	24	18.	18.	FAX
15	FIC	Char	16	3.	3.	FIC
6	FYRC	Num	8	2.	2.	FYRC
24	GGROUP	Char	12	4.	4.	GGROUP
25	GIND	Char	12	6.	6.	GIND
23	GSECTOR	Char	12	2.	2.	GSECTOR
26	GSUBIND	Char	12	8.	8.	GSUBIND
14	IDBFLAG	Char	12	1.	1.	IDBFLAG
17	INCORP	Char	12	8.	8.	INCORP
8	IPODATE	Num	8	8.	8.	IPODATE
1	KYGVKEY	Num	8	6.	6.	GVKEY
16	LOC	Char	4	3.	3.	LOC
22	NAICS	Char	8	6.	6.	NAICS
31	PHONE	Char	24	18.	18.	PHONE
12	PRICAN	Char	12	8.	8.	PRICAN
13	PRIROW	Char	12	8.	8.	PRIROW
11	PRIUSA	Char	12	8.	8.	PRIUSA
21	SIC	Num	8	4.	4.	SIC
27	SPCINDCD	Num	8	4.	4.	SPCINDCD
28	SPCSECCD	Num	8	4.	4.	SPCSECCD
18	STATE	Char	12	8.	8.	STATE
4	STKO	Num	8	1.	1.	STKO
30	WEBURL	Char	68	60.	60.	WEBURL

Output 39.5.1 *continued*

Retrieve All GVKEYs and Company Names

Obs KYGVKEY

1	1000
2	1001
3	1002
4	1003
5	1004
6	1005
7	1006
8	1007
9	1008
10	1009
11	1010
12	1011
13	1012
14	1013
15	1014
16	1015
17	1016
18	1017
19	1018
20	1019

Obs CONM

1	A & E PLASTIK PAK INC
2	A & M FOOD SERVICES INC
3	AAI CORP
4	A.A. IMPORTING CO INC
5	AAR CORP
6	A.B.A. INDUSTRIES INC
7	ABC INDS INC
8	ABKCO INDUSTRIES INC
9	ABM COMPUTER SYSTEMS INC
10	ABS INDUSTRIES INC
11	ACF INDUSTRIES HOLDING CORP
12	ACS ENTERPRISES INC
13	ACS INDUSTRIES INC
14	ADC TELECOMMUNICATIONS INC
15	ADDSO INDUSTRIES INC
16	ADI ELECTRONICS INC
17	AEC INC
18	AEL INDUSTRIES -CL A
19	AES TECHNOLOGY SYSTEMS INC
20	AFA PROTECTIVE SYSTEMS INC

Example 39.6: Retrieving Stock Time Series by PERMNO

This example shows how to retrieve the MPRC, MASK, and MBID time series by PERMNO key access in the STK database. For brevity, the WHERE= option in the DATA step selects a range of MCALDT for 25 observations.

```

title 'Retrieve IBM Monthly PRC, ASK, and BID by PERMNO Access';
libname _all_ clear;

libname crsp sasexccm
  "\\tappan\crspl\data201008_little\MIZ201006\"
  setid=20
  permno=12490
  itemlist="MPRC.*;MASK.*;MBID.*";

data mstkts_all( where=( mcaldt >= '30jun2008'd) ) ;
  set crsp.mstk_ts;
run;
proc contents data=mstkts_all;
run;
proc print data=mstkts_all;
run;

```

Output 39.6.1 IBM's Monthly PRC, ASK, and BID by PERMNO

Retrieve IBM Monthly PRC, ASK, and BID by PERMNO Access			
The CONTENTS Procedure			
Data Set Name	WORK.MSTKTS_ALL	Observations	25
Member Type	DATA	Variables	5
Engine	V9	Indexes	0
Created	Wed, Feb 16, 2011 02:14:56 PM	Observation Length	40
Last Modified	Wed, Feb 16, 2011 02:14:56 PM	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	WINDOWS_32		
Encoding	wlatin1 Western (Windows)		
Engine/Host Dependent Information			
Data Set Page Size	4096		
Number of Data Set Pages	1		
First Data Page	1		
Max Obs per Page	101		
Obs in First Data Page	25		
Number of Data Set Repairs	0		
Filename	C:\DOCUME~1\saskff\LOCALS~1\Temp\SAS Temporary Files_TD236_VMW0296_\mstkts_all.sas7bdat		
Release Created	9.0301B0		
Host Created	XP_PRO		

Output 39.6.1 *continued*

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
1	KYPERMNO	Num	8	6.	6.	PERMNO
4	MASK	Num	8	12.5	12.5	Ask
5	MBID	Num	8	12.5	12.5	Bid
2	MCALDT	Num	8	YYMMDDN8.	YYMMDD8.	Caldt
3	MPRC	Num	8	12.5	12.5	Prc

Retrieve IBM Monthly PRC, ASK, and BID by PERMNO Access						
Obs	KYPERMNO	MCALDT	MPRC	MASK	MBID	
1	12490	20080630	118.53000	118.63000	118.28000	
2	12490	20080731	127.98000	127.93000	127.99000	
3	12490	20080829	121.73000	121.77000	121.74000	
4	12490	20080930	116.96000	116.19000	116.09000	
5	12490	20081031	92.97000	93.54000	92.92000	
6	12490	20081128	81.60000	81.72000	81.60000	
7	12490	20081231	84.16000	84.22000	84.09000	
8	12490	20090130	91.65000	91.73000	91.71000	
9	12490	20090227	92.03000	92.18000	92.16000	
10	12490	20090331	96.89000	97.10000	97.10000	
11	12490	20090430	103.21000	103.39000	103.31000	
12	12490	20090529	106.28000	106.38000	106.40000	
13	12490	20090630	104.42000	104.38000	104.34000	
14	12490	20090731	117.93000	118.01000	117.93000	
15	12490	20090831	118.05000	118.06000	118.04000	
16	12490	20090930	119.61000	119.56000	119.56000	
17	12490	20091030	120.61000	120.63000	120.62000	
18	12490	20091130	126.35000	126.43000	126.42000	
19	12490	20091231	130.89999	130.89000	130.84000	
20	12490	20100129	122.39000	122.32000	122.30000	
21	12490	20100226	127.16000	127.22000	127.21000	
22	12490	20100331	128.25000	128.30000	128.25999	
23	12490	20100430	129.00000	128.89000	128.86000	
24	12490	20100528	125.26000	125.17000	125.08000	
25	12490	20100630	123.48000	123.41000	123.38000	

Example 39.7: Retrieving Stock and Indices Monthly Time Series by INDNO

This example shows how to retrieve monthly time series by INDNO key access in the IND database. For brevity, the WHERE= option in the DATA step selects a recent range of MCALDT.

```

title 'Retrieve Several Monthly Time Series by INDNO Access';
libname _all_ clear;

libname crsp sasexccm
      "\\tappan\crsp1\data201008_little\MIZ201006\"

```

```

setid=420
indno=1000040 indno=1000060 indno=1000080
itemlist="MAIND.*;MARET.*;MIIND.*";

data mindts_all ( where=( mcaldt >= '30jun2009'd) );
  set crsp.mthind_ts;
run;

proc print data=mindts_all; run;

```

Output 39.7.1 Monthly Time Series by INDNO

Retrieve Several Monthly Time Series by INDNO Access					
Obs	KYINDNO	MCALDT	MAIND	MARET	MIIND
1	1000040	20090630	806.96	-0.015017	333.67
2	1000040	20090731	873.04	0.081896	334.25
3	1000040	20090831	902.23	0.033436	335.08
4	1000040	20090930	938.68	0.040394	335.72
5	1000040	20091030	912.56	-0.027819	336.24
6	1000040	20091130	964.47	0.056883	337.16
7	1000040	20091231	982.11	0.018287	337.88
8	1000040	20100129	949.37	-0.033339	338.31
9	1000040	20100226	978.72	0.030920	339.13
10	1000040	20100331	1037.53	0.060087	339.79
11	1000040	20100430	1054.85	0.016696	340.25
12	1000040	20100528	968.99	-0.081403	341.07
13	1000040	20100630	920.85	-0.049681	341.73
14	1000060	20090630	1258.17	0.034083	180.28
15	1000060	20090731	1356.35	0.078031	180.36
16	1000060	20090831	1378.50	0.016334	180.59
17	1000060	20090930	1454.80	0.055349	180.68
18	1000060	20091030	1401.98	-0.036304	180.75
19	1000060	20091130	1468.60	0.047513	181.08
20	1000060	20091231	1555.54	0.059201	181.19
21	1000060	20100129	1470.06	-0.054949	181.25
22	1000060	20100226	1530.69	0.041239	181.49
23	1000060	20100331	1641.63	0.072481	181.61
24	1000060	20100430	1686.83	0.027533	181.69
25	1000060	20100528	1544.38	-0.084447	181.93
26	1000060	20100630	1440.70	-0.067137	182.02
27	1000080	20090630	823.64	-0.004569	305.33
28	1000080	20090731	890.39	0.081042	305.78
29	1000080	20090831	916.85	0.029715	306.46
30	1000080	20090930	956.86	0.043638	306.94
31	1000080	20091030	928.44	-0.029699	307.34
32	1000080	20091130	979.35	0.054839	308.12
33	1000080	20091231	1006.14	0.027352	308.68
34	1000080	20100129	967.73	-0.038177	309.01
35	1000080	20100226	999.85	0.033197	309.68
36	1000080	20100331	1062.61	0.062762	310.20
37	1000080	20100430	1082.91	0.019104	310.55
38	1000080	20100528	994.02	-0.082082	311.22
39	1000080	20100630	940.73	-0.053606	311.73

Example 39.8: Retrieving Stock and Indices Daily Time Series by INDNO

This example shows how to retrieve daily time series by INDNO key access of the IND database. For brevity, the WHERE= option in the DATA step selects a recent range of CALDT.

```
title 'Retrieve Several Daily Time Series by INDNO Access';
libname _all_ clear;

libname crsp sasexccm
    "\\bb04smb01\thirdparty\lnx\crspdata\DIZ201006\"
    setid=460
    indno=1000040 indno=1000060 indno=1000080
    itemlist="TOTCNT.*;TOTVAL.*;TRET.*";

data dindts_all ( where=( caldt >= '15jun2010'd) );
    set crsp.dlyind_ts;
run;

proc print data=dindts_all; run;
```

Output 39.8.1 Daily Time Series by INDNO

Retrieve Several Daily Time Series by INDNO Access					
Obs	KYINDNO	CALDT	TOTCNT	TOTVAL	TRET
1	1000040	20100615	2668	11859837753.20	0.023096
2	1000040	20100616	2669	11841138158.33	-0.001545
3	1000040	20100617	2670	11852139584.84	0.000916
4	1000040	20100618	2671	11873916422.35	0.001838
5	1000040	20100621	2672	11839008747.57	-0.003009
6	1000040	20100622	2672	11627382000.00	-0.017709
7	1000040	20100623	2672	11594378306.30	-0.002811
8	1000040	20100624	2673	11402808548.54	-0.016525
9	1000040	20100625	2675	11479692502.15	0.006645
10	1000040	20100628	2674	11414419071.77	-0.003311
11	1000040	20100629	2674	11051115070.31	-0.031777
12	1000040	20100630	2674	10987117493.51	-0.008165
13	1000060	20100615	2740	3408075602.72	0.027565
14	1000060	20100616	2741	3408111567.48	-0.000031
15	1000060	20100617	2741	3410846831.87	0.000734
16	1000060	20100618	2741	3414496996.34	0.001222
17	1000060	20100621	2738	3383308305.95	-0.009517
18	1000060	20100622	2741	3343876276.79	-0.011656
19	1000060	20100623	2741	3331677101.72	-0.003784
20	1000060	20100624	2741	3277142757.63	-0.016425
21	1000060	20100625	2740	3289059489.28	0.003588
22	1000060	20100628	2739	3281646245.81	-0.002116
23	1000060	20100629	2741	3156605732.63	-0.038661
24	1000060	20100630	2741	3117034325.97	-0.012478
25	1000080	20100615	5408	15267913355.93	0.024090
26	1000080	20100616	5410	15249249725.81	-0.001207
27	1000080	20100617	5411	15262986416.71	0.000875
28	1000080	20100618	5412	15288413418.68	0.001701
29	1000080	20100621	5410	15222317053.52	-0.004462
30	1000080	20100622	5413	14971258276.79	-0.016364
31	1000080	20100623	5413	14926055408.02	-0.003029
32	1000080	20100624	5414	14679951306.17	-0.016503
33	1000080	20100625	5415	14768751991.42	0.005962
34	1000080	20100628	5413	14696065317.58	-0.003044
35	1000080	20100629	5415	14207720802.94	-0.033314
36	1000080	20100630	5415	14104151819.47	-0.009123

Example 39.9: Retrieving Information for Availability of Group INDNOs

This example shows how to retrieve header information about group data and how to obtain a list of all the available INDNO keys in the IND database. The INDNO= option is intentionally omitted so that a default list is generated of all of the INDNOs in the database that are available for SETID 440.

```

title 'Retrieve Header Information for a Complete INDNO list';
libname _all_ clear;

libname crsp sasexccm

```

```

"\\bb04smb01\thirdparty\lnx\crspdata\DIZ201006\"
setid=440
itemlist="INDNOG.*; INDCOG.*; INDNAMEG.*; GROUPNAMEG.*";

data dgindts_all;
    set crsp.indhdr;
run;

proc print data=dgindts_all(keep=kyindno indnameg); run;

```

Output 39.9.1 Daily Group Indices Header by INDNO

Retrieve Header Information for a Complete INDNO list	
Obs	KYINDNO
1	1000012
2	1000032
3	1000052
4	1000072
5	1000092
6	1000112
7	1000132
8	1000152
9	1000172
Obs	INDNAMEG
1	CRSP NYSE Market Capitalization Deciles
2	CRSP Amex Market Capitalization Deciles
3	CRSP NYSE/Amex Market Capitalization Deciles
4	CRSP Nasdaq Market Capitalization Deciles
5	CRSP NYSE/Amex/Nasdaq Market Capitalization Deciles
6	CRSP NYSE/Amex Beta Deciles
7	CRSP NYSE/Amex Standard Deviation Deciles
8	CRSP Nasdaq Beta Deciles
9	CRSP Nasdaq Standard Deviation Deciles

Example 39.10: Retrieving Daily Group Time Series by INDNO= Option

This example shows how to retrieve daily group time series by using the INDNO keys in the IND database that were found in [Example 39.9](#).

```

title 'Retrieve Daily Group Time Series by INDNO';
libname _all_ clear;

libname crsp sasexccm
"\\bb04smb01\thirdparty\lnx\crspdata\DIZ201006\"
setid=440
indno=1000012 indno=1000032

```

```

itemlist="AINDG.*;ARETG.*;USDCNTG.*;USDVALG.*";

data dgindts_all ( where=( caldt >= '29jun2010'd) );
  set crsp.dlygind_ts;
run;

proc print data=dgindts_all; run;

```

Output 39.10.1 Daily Group Indices Time Series by INDNO

Retrieve Daily Group Time Series by INDNO							
Obs	KEYSET_		CALDT	AINDG	ARETG	USDCNTG	USDVALG
	KYINDNO	TAG					
1	1000012	1	20100629	7830.32	-0.027881	212	18621519.46
2	1000012	1	20100630	7818.16	-0.001553	212	18102340.54
3	1000012	2	20100629	2152.53	-0.029494	218	41076860.87
4	1000012	2	20100630	2138.40	-0.006568	218	39865355.36
5	1000012	3	20100629	2062.74	-0.030899	221	68226374.39
6	1000012	3	20100630	2050.86	-0.005761	221	66118281.02
7	1000012	4	20100629	1889.98	-0.034272	220	109562324.72
8	1000012	4	20100630	1876.58	-0.007090	220	105767265.49
9	1000012	5	20100629	2452.63	-0.037792	219	176873704.06
10	1000012	5	20100630	2426.61	-0.010609	219	170189222.39
11	1000012	6	20100629	2352.25	-0.036727	218	273518451.00
12	1000012	6	20100630	2326.55	-0.010923	218	263473022.01
13	1000012	7	20100629	1744.62	-0.036671	221	441993909.25
14	1000012	7	20100630	1728.12	-0.009454	221	425785496.41
15	1000012	8	20100629	1837.74	-0.034768	217	728682180.02
16	1000012	8	20100630	1823.06	-0.007989	217	703347314.23
17	1000012	9	20100629	1539.83	-0.037301	217	1551328686.76
18	1000012	9	20100630	1528.09	-0.007619	217	1493462838.15
19	1000012	10	20100629	687.77	-0.029865	219	7887915836.89
20	1000012	10	20100630	682.07	-0.008285	219	7652344301.36
21	1000032	1	20100629	50180.52	-0.028314	46	421298.09
22	1000032	1	20100630	49647.30	-0.010626	46	409369.47
23	1000032	2	20100629	9074.88	-0.018115	53	1027381.77
24	1000032	2	20100630	8999.49	-0.008307	53	1008770.94
25	1000032	3	20100629	7605.46	-0.021016	49	1357042.08
26	1000032	3	20100630	7647.77	0.005564	49	1328521.95
27	1000032	4	20100629	4864.93	-0.019350	49	1882198.23
28	1000032	4	20100630	4862.58	-0.000483	49	1845777.95
29	1000032	5	20100629	3830.96	-0.019162	52	2935672.46
30	1000032	5	20100630	3836.25	0.001382	52	2879419.36
31	1000032	6	20100629	1985.95	-0.023069	49	3471137.55
32	1000032	6	20100630	1994.63	0.004371	49	3391061.96
33	1000032	7	20100629	1737.15	-0.026127	50	5429238.78
34	1000032	7	20100630	1723.08	-0.008097	50	5287388.16
35	1000032	8	20100629	985.90	-0.043221	49	8751647.84
36	1000032	8	20100630	982.62	-0.003332	49	8373396.28
37	1000032	9	20100629	2012.69	-0.035989	47	13946079.35
38	1000032	9	20100630	2008.03	-0.002314	47	13444178.17
39	1000032	10	20100629	580.82	-0.034960	48	77397528.18
40	1000032	10	20100630	574.67	-0.010592	48	74691749.11

Example 39.11: Retrieving Monthly Group Time Series by INDNO= Option

This example shows how to retrieve monthly group time series by using the INDNO= option.

```

title 'Retrieve Monthly Group Time Series by INDNO';
libname _all_ clear;

libname crsp sasexccm
    "\\tappan\crsp1\data201008_little\MIZ201006\"
    setid=400
    indno=1000357
    itemlist="MTRETG.*;MUSDCNTG.*;MUSDVALG.*";

data mgindts_all ( where=( mcaldt >= '01apr2010'd) );
    set crsp.mthgind_ts;
run;

proc contents data=mgindts_all; run;
proc print data=mgindts_all; run;

```

Output 39.11.1 Monthly Group Indices Time Series by INDNO

Retrieve Monthly Group Time Series by INDNO			
The CONTENTS Procedure			
Data Set Name	WORK.MGINDTS_ALL	Observations	51
Member Type	DATA	Variables	6
Engine	V9	Indexes	0
Created	Wed, Feb 16, 2011 02:15:18 PM	Observation Length	64
Last Modified	Wed, Feb 16, 2011 02:15:18 PM	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	WINDOWS_32		
Encoding	wlatin1 Western (Windows)		
Engine/Host Dependent Information			
Data Set Page Size	8192		
Number of Data Set Pages	1		
First Data Page	1		
Max Obs per Page	127		
Obs in First Data Page	51		
Number of Data Set Repairs	0		
Filename	C:\DOCUME~1\saskff\LOCALS~1\Temp\SAS Temporary Files_TD236_VMW0296_mgindts_all.sas7bdat		
Release Created	9.0301B0		
Host Created	XP_PRO		

Output 39.11.1 *continued*

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
2	KEYSET_TAG	Char	24	6.	6.	KEYSET
1	KYINDNO	Num	8	7.	7.	Indno
3	MCALDT	Num	8	YYMMDDN8.	YYMMDD8.	Caldt
4	MTRETG	Num	8	11.6	11.6	Tret
5	MUSDCNTG	Num	8	8.	8.	Usdcnt
6	MUSDVALG	Num	8	15.2	15.2	Usdval

Output 39.11.1 continued

Retrieve Monthly Group Time Series by INDNO						
Obs	KYINDNO	KEYSET_ TAG	MCALDT	MTRETG	MUSDCNTG	MUSDVALG
1	1000357	1	20100430	0.008174	175	8536273485.00
2	1000357	1	20100528	-0.080409	175	8591982134.00
3	1000357	1	20100630	-0.049665	175	7875937725.00
4	1000357	2	20100430	0.027565	185	1788689604.00
5	1000357	2	20100528	-0.075078	185	1840767431.00
6	1000357	2	20100630	-0.050972	185	1704852934.00
7	1000357	3	20100430	0.040804	190	932695901.00
8	1000357	3	20100528	-0.069991	188	969616974.00
9	1000357	3	20100630	-0.060083	187	895650676.00
10	1000357	4	20100430	0.037353	184	564387964.00
11	1000357	4	20100528	-0.079216	183	582823225.00
12	1000357	4	20100630	-0.070191	183	537053252.00
13	1000357	5	20100430	0.042394	227	478255773.00
14	1000357	5	20100528	-0.081422	228	500248663.00
15	1000357	5	20100630	-0.057584	227	457590748.00
16	1000357	6	20100430	0.057838	222	322738641.00
17	1000357	6	20100528	-0.078382	222	343700243.00
18	1000357	6	20100630	-0.081953	222	317307907.00
19	1000357	7	20100430	0.050365	292	287694406.00
20	1000357	7	20100528	-0.066656	291	301676691.00
21	1000357	7	20100630	-0.071452	292	283193837.00
22	1000357	8	20100430	0.065176	358	220136974.00
23	1000357	8	20100528	-0.075101	355	233544237.00
24	1000357	8	20100630	-0.071157	354	215763356.00
25	1000357	9	20100430	0.069557	514	180205516.00
26	1000357	9	20100528	-0.083660	514	193398849.00
27	1000357	9	20100630	-0.078070	520	180564497.00
28	1000357	10	20100430	0.096078	1374	134793898.00
29	1000357	10	20100528	-0.087666	1371	149100089.00
30	1000357	10	20100630	-0.079349	1368	137743847.00
31	1000357	11	20100430	0.011533	360	10324963089.00
32	1000357	11	20100528	-0.079468	360	10432749564.00
33	1000357	11	20100630	-0.049897	360	9580790659.00
34	1000357	12	20100430	0.040203	601	1975339638.00
35	1000357	12	20100528	-0.075396	599	2052688862.00
36	1000357	12	20100630	-0.062350	597	1890294676.00
37	1000357	13	20100430	0.057194	872	830570020.00
38	1000357	13	20100528	-0.073486	868	878921171.00
39	1000357	13	20100630	-0.075456	868	816265100.00
40	1000357	14	20100430	0.080906	1888	314999414.00
41	1000357	14	20100528	-0.085404	1885	342498939.00
42	1000357	14	20100630	-0.078624	1888	318308344.00
43	1000357	15	20100430	0.016137	961	12300302728.00
44	1000357	15	20100528	-0.078799	959	12485438427.00
45	1000357	15	20100630	-0.051949	957	11471085335.00
46	1000357	16	20100430	0.063714	2760	1145569435.00
47	1000357	16	20100528	-0.076828	2753	1221420110.00
48	1000357	16	20100630	-0.076345	2756	1134573445.00
49	1000357	17	20100430	0.020191	3721	13445872162.00
50	1000357	17	20100528	-0.078623	3712	13706858536.00
51	1000357	17	20100630	-0.054145	3713	12605658779.00

Example 39.12: Retrieving Monthly Treasury Time Series by TREASNO= Option

This example shows how to retrieve monthly US Treasury time series by using the TREASNO= option.

```

title 'Retrieve Monthly US Treasury Time Series by TREASNO';
libname _all_ clear;

libname crsp sasexccm
    "\\tappan\crsp1\data201008_little\TRZ201008\"
    setid=100
    treasno=202999 treasno=203666
    itemlist="TMASK.*;TMBID.*";

data mtrsts_two;
    set crsp.trs_mth_ts;
run;
proc contents data=mtrsts_two; run;
proc print data=mtrsts_two; run;

```

Output 39.12.1 Monthly US Treasury Time Series by TREASNO

Retrieve Monthly US Treasury Time Series by TREASNO			
The CONTENTS Procedure			
Data Set Name	WORK.MTRSTS_TWO	Observations	31
Member Type	DATA	Variables	4
Engine	V9	Indexes	0
Created	Wed, Feb 16, 2011 02:15:22 PM	Observation Length	32
Last Modified	Wed, Feb 16, 2011 02:15:22 PM	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	WINDOWS_32		
Encoding	wlatin1 Western (Windows)		
Engine/Host Dependent Information			
Data Set Page Size	4096		
Number of Data Set Pages	1		
First Data Page	1		
Max Obs per Page	126		
Obs in First Data Page	31		
Number of Data Set Repairs	0		
Filename	C:\DOCUME~1\saskff\LOCALS~1\Temp\SAS Temporary Files_TD236_VMW0296_mtrsts_two.sas7bdat		
Release Created	9.0301B0		
Host Created	XP_PRO		

Output 39.12.1 *continued*

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
1	KYTREASNO	Num	8	6.	6.	TREASNO
2	MONTHLY	Num	8	YYMMDDN8.	YYMMDD8.	Date
3	TMASK	Num	8	11.6	11.6	Ask
4	TMBID	Num	8	11.6	11.6	Bid
Retrieve Monthly US Treasury Time Series by TREASNO						
Obs	KYTREASNO	MONTHLY	TMASK	TMBID		
1	202999	19961129	100.085938	100.054688		
2	202999	19961231	99.593750	99.531250		
3	202999	19970131	99.593750	99.531250		
4	202999	19970228	99.398438	99.335938		
5	202999	19970331	98.898438	98.835938		
6	202999	19970430	99.230469	99.167969		
7	202999	19970530	99.453125	99.390625		
8	202999	19970630	99.597656	99.535156		
9	202999	19970731	99.988281	99.925781		
10	202999	19970829	99.785156	99.722656		
11	202999	19970930	99.960938	99.898438		
12	202999	19971031	100.054688	99.992188		
13	202999	19971128	99.921875	99.859375		
14	202999	19971231	100.054688	99.992188		
15	202999	19980130	100.226563	100.164063		
16	202999	19980227	100.113281	100.050781		
17	202999	19980331	100.121094	100.058594		
18	202999	19980430	100.152344	100.089844		
19	202999	19980529	100.144531	100.082031		
20	202999	19980630	100.140625	100.109375		
21	202999	19980731	100.125000	100.093750		
22	202999	19980831	100.160156	100.128906		
23	202999	19980930	100.250000	100.218750		
24	202999	19981030	100.128906	100.097656		
25	203666	20051230	97.792306	97.781861		
26	203666	20060131	98.099833	98.095500		
27	203666	20060228	98.391111	98.387556		
28	203666	20060331	98.786153	98.783458		
29	203666	20060428	99.115458	99.113542		
30	203666	20060531	99.538500	99.537500		
31	203666	20060630	99.933250	99.933083		

References

Chicago Booth Center for Research in Security Prices, *CRSP/Compustat Merged Database Guide*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices, *CRSPAccess User Guide, CRSP US Stock & US Indices Databases and CRSP/Compustat Merged Database*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices (2003), *CRSP Data Description Guide*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices (2002), *CRSP Programmer's Guide*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices (2003), *CRSPAccess Database Format Release Notes*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices (2003), *CRSP Utilities Guide*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chicago Booth Center for Research in Security Prices (2002), *CRSP SFA Guide*, Chicago: The University of Chicago Booth School of Business,
[<http://www.crsp.chicagobooth.edu/documentation/>].

Chapter 40

The SASEFAME Interface Engine

Contents

Overview: SASEFAME Interface Engine	2718
Getting Started: SASEFAME Interface Engine	2718
Structure of a SAS Data Set That Contains Time Series Data	2718
Reading and Converting Fame Database Time Series	2719
Using the SAS DATA Step	2719
Using SAS Procedures	2719
Using the SAS Windowing Environment	2719
Remote Fame Data Access	2720
Creating Views of Time Series Using SASEFAME LIBNAME Options	2720
Syntax: SASEFAME Interface Engine	2720
LIBNAME <i>libref</i> SASEFAME Statement	2721
Details: SASEFAME Interface Engine	2725
SAS Output Data Set	2725
Mapping Fame Frequencies to SAS Time Intervals	2726
Performing the Crosslist Selection Function	2728
Examples: SASEFAME Interface Engine	2730
Example 40.1: Converting an Entire Fame Database	2730
Example 40.2: Reading Time Series from the Fame Database	2733
Example 40.3: Writing Time Series to the SAS Data Set	2734
Example 40.4: Limiting the Time Range of Data	2737
Example 40.5: Creating a View Using the SQL Procedure and SASEFAME	2741
Example 40.6: Reading Other Fame Data Objects with the FAMEOUT= Option	2746
Example 40.7: Remote Fame Access Using Fame CHLI	2749
Example 40.8: Selecting Time Series Using CROSSLIST= Option and KEEP Statement	2750
Example 40.9: Selecting Time Series Using CROSSLIST= Option and Fame Namelist	2752
Example 40.10: Selecting Time Series Using CROSSLIST= Option and WHERE=TICK	2754
Example 40.11: Selecting Boolean Case Series with the FAMEOUT= Option	2756
Example 40.12: Selecting Numeric Case Series with the FAMEOUT= Option	2757
Example 40.13: Selecting Date Case Series with the FAMEOUT= Option	2759
Example 40.14: Selecting String Case Series with the FAMEOUT= Option	2761
Example 40.15: Extracting Source for Formulas	2762
Example 40.16: Reading Time Series by Defining Fame Expression Groups in the INSET= Option with the KEEP= Clause	2763
Example 40.17: Optimizing Cache Sizes with the TUNEFAME= and TUNECHLI= Options	2765

Overview: SASEFAME Interface Engine

The SASEFAME interface engine provides a seamless interface between Fame and SAS data to enable SAS users to access and process time series, case series, and formulas that reside in a Fame database.

Fame is an integrated, front-to-back market data and historical database solution for storing and managing real-time and high-volume time series data that are used by leading institutions in the financial, energy, and public sectors, as well as by third-party content aggregators, software vendors, and individual investors. Fame provides real-time market data feeds and end-of-day data, a Web-based desktop solution, application hosting, data delivery components, and tools for performing analytic modeling.

The SASEFAME engine uses the LIBNAME statement to enable you to specify the time series you want to read from the Fame database and how you want to convert the selected time series to the same time scale. You can then use the SAS DATA step to perform further subsetting and to store the resulting time series in a SAS data set. You can perform more analysis (if desired) either in the same SAS session or in another session at a later time.

SASEFAME in SAS 8.2 supports 32-bit Windows, Solaris, AIX, and HP-UX hosts.

SASEFAME in SAS 9.2 supports 32-bit Windows, Solaris, AIX, Linux, Linux Opteron, and HP-UX hosts.

SASEFAME in SAS 9.22 supports 32-bit Windows, Solaris, Linux, and Linux Opteron hosts.

SASEFAME in SAS 9.3 supports 32-bit Windows, 64-bit Windows, Solaris, AIX, Linux, and Linux Opteron hosts.

Getting Started: SASEFAME Interface Engine

Structure of a SAS Data Set That Contains Time Series Data

The SAS System represents time series data in a two-dimensional array, called a SAS data set, whose columns correspond to series variables and whose rows correspond to measurements of these variables at certain time periods. The time periods at which observations are recorded can be included in the data set as a time ID variable. The SASEFAME engine provides a time ID variable named DATE. The DATE variable can be represented by any of the time intervals shown in the section “[Mapping Fame Frequencies to SAS Time Intervals](#)” on page 2726.

Reading and Converting Fame Database Time Series

The SASEFAME engine supports reading and converting time series that reside in Fame databases. The SASEFAME engine uses the Fame Work database to temporarily store the converted time series. All series specified by the Fame wildcard are written to the Fame Work database. For conversion of very large databases, you might want to define the FAME_TEMP environment variable to point to a location where there is ample space for the Fame Work database.

The SASEFAME engine provides seamless access to Fame databases via Fame's C host language interface (CHLI). Fame expressions that contain formulas and Fame functions can be input to the engine via the INSET= option.

The SASEFAME engine finishes the CHLI whenever a fatal error occurs. To restart the engine after a fatal error, terminate the current SAS session and bring up a new SAS session.

Using the SAS DATA Step

If desired, you can store the converted series in a SAS data set by using the SAS DATA step. You can also perform other operations on your data inside the DATA step. After your data is stored in a SAS data set, you can use it as you would any other SAS data set.

Using SAS Procedures

You can print the output SAS data set by using the PRINT procedure and report information concerning the contents of your data set by using the CONTENTS procedure, as in [Example 40.1](#). You can create a view of the FAME database by using the SQL procedure's USING clause to reference the SASEFAME engine in your *libref*. See [Example 40.5](#).

Using the SAS Windowing Environment

You can see the available data sets in the SAS LIBNAME window of the SAS windowing environment. To do so, select the SASEFAME *libref* in the LIBNAME window that you have previously defined in your LIBNAME statement. You can view your SAS output observations by double-clicking the desired output data set *libref* in the LIBNAME window of the SAS windowing environment. You can type **Viewtable** on the SAS command line to view any of your SASEFAME tables, views, or *librefs* both for input and output data sets.

Before you use **Viewtable**, it is recommended that you store your output data sets in a physical folder or library that is separate from the folder or library used for your input databases. (The default location for output data sets is the SAS Work library.)

Remote Fame Data Access

The remote access feature of the SASEFAME interface uses the Fame CHLI to communicate with your remote Fame server, and it is available to licensed CHLI customers who have Fame CHLI on both the remote and client machines.

As shown in [Example 40.7](#), you simply provide the `frdb_m` port number and node name of your Fame master server in your *libref*. For more details, see the section “Starting the Master Server” in the *Guide to Fame Database Servers*.

Creating Views of Time Series Using SASEFAME LIBNAME Options

You can perform selection based on names of your time series simply by using Fame wildcard specifications in your SASEFAME `WILDCARD=` option.

You can limit the time span of time series data by specifying a begin and end date range in your SASEFAME `RANGE=` option.

It is also easy to use the SAS input data set `INSET=` option to create a specific view of your Fame data. Multiple views can be created by using multiple `LIBNAME` statements with customized options tailored to the unique view that you want to create.

You can list the `INSET` variables that you want to keep in your SAS data set by using the `KEEPLIST` clause. When used in conjunction with the input data set that you specify in the `INSET=` option, SASEFAME can show any or all of your expression groups in the same view or in multiple views. The `INSET=` option defines the valid set of expression groups that you can reference in the `KEEPLIST=` clause, as shown in [Example 40.16](#).

The `INSET` variables define the `BY` variables that enable you to view cross sections (slices) of your data. When `INSET` variables are used in conjunction with the `WHERE` clause and the `CROSSLIST=` option, SASEFAME can show any or all of your `BY` groups in the same view or in multiple views. When the `INSET=` option is used with a `WHERE` clause that specifies the `BY` variables you want to use in your view, it must also use the `CROSSLIST=` option, as shown in [Example 40.10](#). The `CROSSLIST=` option can be used without using the `INSET=` option as shown in [Example 40.8](#) and [Example 40.9](#).

Syntax: SASEFAME Interface Engine

The SASEFAME engine uses standard engine syntax. [Table 40.1](#) summarizes the options used by SASEFAME.

Table 40.1 Summary of LIBNAME *libref* SASEFAME Statement

Option	Description
CONVERT=	Specifies the Fame frequency and the Fame technique
WILDCARD=	Specifies a Fame wildcard to match data object series names within the Fame database
RANGE=	Specifies the range of data to keep in format 'ddmm-myyy'd – 'ddmmmyyyy'd
INSET=	Uses a SAS data set named <i>setname</i> and KEEPLIST= <i>fame_expression_group</i> as selection input variables or WHERE= Fame <i>fame_bygroup</i> as selection input for BY variables
CROSSLIST=	Specifies a Fame crosslist <i>fame_namelist</i> to perform selection based on the crossproduct of two Fame namelists
FAMEOUT=	Specifies the Fame data object class/type you want output to the SAS data set
DBVERSION=	Echoes the present version number of the Fame Work data base in the SAS log
TUNEFAME=	Tunes the FAME database engine's use of memory to reduce I/O in favor of a bigger virtual memory for caching database objects
TUNECHLI=	Tunes the CHLI database engine's use of memory to reduce I/O in favor of a bigger virtual memory for caching database objects

LIBNAME *libref* SASEFAME Statement

LIBNAME *libref* **SASEFAME** '*physical name*' *options* ;

Since '*physical name*' specifies the location of the folder where your Fame database resides, it should end in a backslash if you are in a Windows environment or a forward slash if you are in a UNIX environment.

If you are accessing a remote Fame database by using the Fame CHLI, you can use the following syntax for '*physical name*':

```
'#port_number@hostname physical_path_name '
```

The following *options* can be used in the LIBNAME *libref* SASEFAME statement.

CONVERT=(**FREQ**=*fame_frequency* **TECH**=*fame_technique*)

CONV=(**FREQ**=*fame_frequency* **TECH**=*fame_technique*)

specifies the Fame frequency and the Fame technique just as you would in the Fame CONVERT function. There are four possible values for *fame_technique*: *Constant* (default), *Cubic*, *Discrete*, or *Linear*. Table 40.4 shows the Fame frequencies that are supported by the SASEFAME engine.

For a more complete discussion of Fame frequencies and SAS time intervals, see the section “[Mapping Fame Frequencies to SAS Time Intervals](#)” on page 2726. For all possible *fame_frequency* values, see the section “Understanding Frequencies” in the *User's Guide to Fame*. For example:

```
LIBNAME libref sasefame 'physical-name'
      CONVERT=(TECH=CONSTANT FREQ=TWICEMONTHLY);
```

WILDCARD="fame_wildcard"

WILD="fame_wildcard"

limits the time series read from the Fame database. By default, the SASEFAME engine reads all time series in the Fame database that you name in your SASEFAME *libref*. The *fame_wildcard* is a quoted string that contains the Fame wildcard you want to use. The wildcard is used for matching against the data object names of series you want to select from the Fame database that resides in the library you are assigning.

For more information about using wildcards, see the section “Specifying Wildcards” in the *User’s Guide to Fame*.

For example, to read all time series in the TEST library being accessed by the SASEFAME engine, you would specify the following statement:

```
LIBNAME test sasefame 'physical name of test database'
      WILDCARD="?";
```

To read series with names such as A_DATA, B_DATA, or C_DATA, you could specify the following statement:

```
LIBNAME test sasefame 'physical name of test database'
      WILDCARD="^_DATA";
```

When you use the WILDCARD= option, you limit the number of series that are read and converted to the desired frequency. This option can help you save resources when processing large databases or when processing a large number of observations, such as daily or hourly frequencies. Since the SASEFAME engine uses the Fame WORK database to store the converted time series, using wildcards is recommended to prevent your WORK space from getting too large. When the FAMEOUT= option is also specified, the wildcard is applied to the type of data object series you specify in the FAMEOUT= option.

RANGE='fame_begdt'd-'fame_enddt'd

DATERANGE='fame_begdt'd-'fame_enddt'd

DATE='fame_begdt'd-'fame_enddt'd

DATECASE='fame_begdt'd-'fame_enddt'd

limits the time range of data read from your Fame database. The string *fame_begdt* is the beginning date in ddmmyyyy format, and the string *fame_enddt* is the ending date of the range in ddmmyyyy format; both strings must be surrounded by single quotation marks followed by the letter d.

As an example, to read a series with a date range that spans the first quarter of 1999, you could use the following statement:

```
LIBNAME test sasefame 'physical name of test database'
      RANGE='01jan1999'd - '31mar1999'd;
```

INSET=(setname KEEP=fame_expression_group)

INSET=(setname KEEPLIST=fame_expression_group)

specifies the name of a SAS data set (*setname*) and selects series that are generated by the expressions defined in *fame_expression_group*. You can define *fame_expression_group* by using Fame functions and Fame expressions. It is important to specify the length of the longest expression, or expressions might be truncated since the default length is the first defined variable in the data step. The INSET (input data set) must output each expression statement as a character string ending with a semicolon, surrounded by single quotation marks, and followed by another semicolon and an output statement. The following statements create an input data set, INSETA, and print it.

```
data inseta; /* Use this for training data base */
  length express $52;
  express='{ibm.high,ibm.low,ibm.close}'; output;
  express='crosslist({gm,f,c},{volume})'; output;
  express='cvx.close'; output;
  express='mave(ibm.close,30)'; output;
  express='cvx.close+ibm.close'; output;
  express='ibm.close'; output;
  express='close * shares/sum(close * shares)'; output;
  express='sum(pep.volume)'; output;
  express='mave(pep.close,20)'; output;
run;

proc print
  data=inseta;
run;
```

Next you can name the input data set you want to use in the INSET= option, followed by the KEEP= variable that specifies the expression group you want to keep. Only series variables that are defined in the selected expression group are output to the output data set. You can define up to eight different expression groups in an INSET= option.

```
libname lib5 sasefame "C:\PROGRA~1\FAME10\util"
  wildcard="?"
  convert=(frequency=business technique=constant)
  range='23jul1997'd - '25jul1997'd
  inset=( inseta KEEP=express)
  ;

data trout;
  set lib5.trainten;
run;

title1 'TRAINING DB, Pricing Timeseries for Expressions in INSET=';
title2 'OUT=TROUT from the PRINT Procedure';
proc print data=trout;
run;
```

Table 40.2 shows the eight expressions that are defined in INSETA.

Table 40.2 SAS Input Data Set, INSETA, Defined for Use in the INSET= Option

Observation	Express
1	cvx.close;
2	ibm.high,ibm.low,ibm.close;
3	mave(ibm.close,30);
4	crosslist(gm,f,c,volume);
5	cvx.close+ibm.close;
6	ibm.close;
7	sum(pep.volume);
8	mave(pep.close,20);

Table 40.3 shows the output data set, TROUT. The output data set names each derived variable ‘SASTEMPn’ by appending the number, n, to match the observation number of the input data set’s expression for that variable. For example, SASTEMP1 names the series derived by ‘cvx.close’ in observation 1, and SASTEMP3 names the series derived by the expression ‘mave(ibm.close,30);’ in observation 3. Since SASTEMP2 is a simple name list of three series, the original series names are used.

Table 40.3 TRAINING DB, Pricing Timeseries for Expressions in INSETA for OUT=TROUT from the PRINT Procedure

DATE	C.VOLUME	VOLUME	GM.VOLUME	IBM.CLOSE	IBM.HIGH
23JUL1997	33791.88	45864.05	37392	52.5625	53.5000
24JUL1997	41828.85	29651.34	27771	53.9063	54.2188
25JUL1997	46979.83	36716.77	24969	53.5000	54.2188
IBM.LOW	SASTEMP1	SASTEMP3	SASTEMP5	SASTEMP6	SASTEMP8
51.5938	38.4063	.	90.9688	52.5625	.
52.2500	38.4375	.	92.3438	53.9063	.
52.8125	39.0000	.	92.5000	53.5000	.

Note that SASTEMP3 and SASTEMP8 have no observations in the date range July 23, 1997, to July 25, 1997, so the missing value symbol ‘.’ appears for those observations.

INSET=(setname WHERE=fame_bygroup)

specifies a SAS data set (*setname*) as input for a BY group such as a ticker, and uses the *fame_bygroup* to select time series that are named using the following convention. Selected variable names are glued together by the BY group name (such as a ticker symbol) concatenated with the glue character (such as DOT) to the series name that is specified in the CROSSLIST= option or in the *fame_bygroup*.

For more information, see the section “Performing the Crosslist Selection Function” on page 2728.

CROSSLIST=(< *fame_namelist1*, > *fame_namelist2*)

CROSS=(< *fame_namelist1*, > *fame_namelist2*)

performs a crossproduct of the members of the first namelist with the members of the second namelist, using a glue symbol “.” to join the two. If one of the time series listed in *fame_namelist2* does not exist, the SASEFAME engine stops processing the remainder of the namelist. For more information, see the section “[Performing the Crosslist Selection Function](#)” on page 2728.

FAMEOUT=*fame_data_object_class_type*

specifies the class and type of the Fame data series objects you want in your SAS output data set. The possible values for *fame_data_object_class_type* are FORMULA, TIME, BOOLEAN, CASE, DATE, and STRING. Case series can be numeric, boolean, string, and date, or they can be generated using formulas that resolve to series. SASEFAME resolves all formulas that belong to the type of series data object that you specify in your FAMEOUT= option. If the FAMEOUT= option is not specified, numeric time series are output to the SAS data set. FAMEOUT=CASE defaults to case series of numeric type. If you want another type of case series in your output, then you must specify it. Scalar data objects are not supported.

DBVERSION=ON | OFF

specifies whether to display the version number of the Fame Work database. DBVERSION=ON specifies that the SAS log show the version number (3 or 4) of the Fame Work database. The default is OFF.

TUNEFAME=NODES *fameengine_size_virtual_memory_MB*

specifies the number of megabytes you want to use for the cache size for the FAME engine. The *fameengine_size_virtual_memory_MB* can range from a minimum of 0.1 MB (100 KB) to a maximum of 17,592,186,000,000 MB. See [Example 40.17](#) for more details.

TUNECHLI=NODES *famechliengine_size_virtual_memory_MB*

specifies the number of megabytes you want to use for your cache size for the FAMECHLI engine. The *famechliengine_size_virtual_memory_MB* can range from a minimum of 0.1 MB (100 KB) to a maximum of 17,592,186,000,000 MB. See [Example 40.17](#) for more details.

Details: SASEFAME Interface Engine

SAS Output Data Set

You can use the SAS DATA step to write the selected time series from your Fame database to a SAS data set. This enables you to easily analyze the data by using the SAS System. You can specify the name of the output data set in the DATA statement. This causes the engine supervisor to create a SAS data set by using the specified name in either the SAS Work library or, if specified, the Sasuser library. For more information about naming your SAS data set, see the section “SAS Data Sets: Data Set Names” in the *SAS Language Reference: Concepts*.

The contents of the SAS data set that contains time series include the date of each observation, the name of each series read from the Fame database as specified by the WILDCARD= option, and the label or Fame description of each series. Missing values are represented as ‘.’ in the SAS data set. You can see the available data sets in the SAS LIBNAME window of the SAS windowing environment by selecting the SASEFAME *libref* in the LIBNAME window that you have previously used in your LIBNAME statement. You can use PROC PRINT and PROC CONTENTS to print your output data set and its contents. You can use PROC SQL and the SASEFAME engine to create a view of your SAS data set. You can view your SAS output observations by double-clicking the desired output data set *libref* in the LIBNAME window of the SAS windowing environment.

The DATE variable in the SAS data set contains the date of the observation. For Fame weekly intervals that end on a Friday, Fame reports the date on the Friday that ends the week, whereas the SAS System reports the date on the Saturday that begins the week.

A more detailed discussion of how to map Fame frequencies to SAS time intervals follows. For other types of data such as Boolean case series, numeric case series, date case series, string case series, and extracting source for formulas, see [Example 40.11](#), [Example 40.12](#), [Example 40.13](#), [Example 40.14](#), and [Example 40.15](#), respectively.

Mapping Fame Frequencies to SAS Time Intervals

Table 40.4 summarizes the mapping of Fame frequencies to SAS time intervals. Fame frequencies often have a sample unit in parentheses following the keyword frequency. This sample unit is an end-of-interval unit. SAS dates are represented by beginning-of-interval notation.

For more information about SAS time intervals, see Chapter 4, “[Date Intervals, Formats, and Functions](#).”

For more information about Fame frequencies, see the section “Understanding Frequencies” in the *User’s Guide to Fame*.

Table 40.4 Mapping Fame Frequencies

Fame Frequency	SAS Time Interval
WEEKLY (SUNDAY)	WEEK.2
WEEKLY (MONDAY)	WEEK.3
WEEKLY (TUESDAY)	WEEK.4
WEEKLY (WEDNESDAY)	WEEK.5
WEEKLY (THURSDAY)	WEEK.6
WEEKLY (FRIDAY)	WEEK.7
WEEKLY (SATURDAY)	WEEK.1
BIWEEKLY (ASUNDAY)	WEEK2.2
BIWEEKLY (AMONDAY)	WEEK2.3
BIWEEKLY (ATUESDAY)	WEEK2.4
BIWEEKLY (AWEDNESDAY)	WEEK2.5
BIWEEKLY (ATHURSDAY)	WEEK2.6
BIWEEKLY (AFRIDAY)	WEEK2.7

Table 40.4 *continued*

Fame Frequency	SAS Time Interval
BIWEEKLY (ASATURDAY)	WEEK2.1
BIWEEKLY (BSUNDAY)	WEEK2.9
BIWEEKLY (BMONDAY)	WEEK2.10
BIWEEKLY (BTUESDAY)	WEEK2.11
BIWEEKLY (BWEDNESDAY)	WEEK2.12
BIWEEKLY (BTHURSDAY)	WEEK2.13
BIWEEKLY (BFRIDAY)	WEEK2.14
BIWEEKLY (BSATURDAY)	WEEK2.8
 BIMONTHLY (NOVEMBER)	 MONTH2.2
BIMONTHLY	MONTH2.1
 QUARTERLY (OCTOBER)	 QTR.2
QUARTERLY (NOVEMBER)	QTR.3
QUARTERLY	QTR.1
 ANNUAL (JANUARY)	 YEAR.2
ANNUAL (FEBRUARY)	YEAR.3
ANNUAL (MARCH)	YEAR.4
ANNUAL (APRIL)	YEAR.5
ANNUAL (MAY)	YEAR.6
ANNUAL (JUNE)	YEAR.7
ANNUAL (JULY)	YEAR.8
ANNUAL (AUGUST)	YEAR.9
ANNUAL (SEPTEMBER)	YEAR.10
ANNUAL (OCTOBER)	YEAR.11
ANNUAL (NOVEMBER)	YEAR.12
ANNUAL	YEAR.1
 SEMIANNUAL (JULY)	 SEMIYEAR.2
SEMIANNUAL (AUGUST)	SEMIYEAR.3
SEMIANNUAL (SEPTEMBER)	SEMIYEAR.4
SEMIANNUAL (OCTOBER)	SEMIYEAR.5
SEMIANNUAL (NOVEMBER)	SEMIYEAR.6
SEMIANNUAL	SEMIYEAR.1
 YPP	 Not supported
PPY	Not supported
 SECONDLY	 SECOND
MINUTELY	MINUTE
HOURLY	HOUR
 DAILY	 DAY
BUSINESS	WEEKDAY

Table 40.4 *continued*

Fame Frequency	SAS Time Interval
TENDAY	TENDAY
TWICEMONTHLY	SEMIMONTH
MONTHLY	MONTH

Performing the Crosslist Selection Function

There are two methods for performing the crosslist selection function. The first method uses two Fame namelists, and the second method uses one namelist and one BY group specified in the WHERE= clause of the INSET= option.

For example, suppose that your Fame database has a string case series named TICKER, so that when the Fame NL function is used on TICKER, it returns the namelist

```
Ticker = {AOL, C, CVX, F, GM, HPQ, IBM, INDUA, INTC, SPX, SUNW, XOM}
```

and your time series are named in *fame_namelist2* as

```
{adjust, close, high, low, open, volume, uclose, uhigh, ulow, uopen, uvolume}
```

When you specify the following statements, then the 132 variables shown in [Table 40.5](#) are selected by the CROSSLIST= option.

```
LIBNAME test sasefame 'physical name of test database'
RANGE='01jan1999'd - '31mar1999'd
CROSSLIST=(nl(ticker),
           {adjust, close, high, low, open, volume,
            uclose, uhigh, ulow, uopen, uvolume})
;
```

Table 40.5 SAS Variables Selected by CROSSLIST= Option

AOL.ADJUST	C.ADJUST	CVX.ADJUST	F.ADJUST
AOL.CLOSE	C.CLOSE	CVX.CLOSE	F.CLOSE
AOL.HIGH	C.HIGH	CVX.HIGH	F.HIGH
AOL.LOW	C.LOW	CVX.LOW	F.LOW
AOL.OPEN	C.OPEN	CVX.OPEN	F.OPEN
AOL.UCLOSE	C.UCLOSE	CVX.UCLOSE	F.UCLOSE
AOL.UHIGH	C.UHIGH	CVX.UHIGH	F.UHIGH
AOL.ULOW	C.ULOW	CVX.ULOW	F.ULOW
AOL.UOPEN	C.UOPEN	CVX.UOPEN	F.UOPEN
AOL.UVOLUME	C.UVOLUME	CVX.UVOLUME	F.UVOLUME

Table 40.5 continued

AOL.VOLUME	C.VOLUME	CVX.VOLUME	F.VOLUME
GM.ADJUST	HPQ.ADJUST	IBM.ADJUST	INDUA.ADJUST
GM.CLOSE	HPQ.CLOSE	IBM.CLOSE	INDUA.CLOSE
GM.HIGH	HPQ.HIGH	IBM.HIGH	INDUA.HIGH
GM.LOW	HPQ.LOW	IBM.LOW	INDUA.LOW
GM.OPEN	HPQ.OPEN	IBM.OPEN	INDUA.OPEN
GM.UCLOSE	HPQ.UCLOSE	IBM.UCLOSE	INDUA.UCLOSE
GM.UHIGH	HPQ.UHIGH	IBM.UHIGH	INDUA.UHIGH
GM.ULOW	HPQ.ULOW	IBM.ULOW	INDUA.ULOW
GM.UOPEN	HPQ.UOPEN	IBM.UOPEN	INDUA.UOPEN
GM.UVOLUME	HPQ.UVOLUME	IBM.UVOLUME	INDUA.UVOLUME
GM.VOLUME	HPQ.VOLUME	IBM.VOLUME	INDUA.VOLUME
INTC.ADJUST	SPX.ADJUST	SUNW.ADJUST	XOM.ADJUST
INTC.CLOSE	SPX.CLOSE	SUNW.CLOSE	XOM.CLOSE
INTC.HIGH	SPX.HIGH	SUNW.HIGH	XOM.HIGH
INTC.LOW	SPX.LOW	SUNW.LOW	XOM.LOW
INTC.OPEN	SPX.OPEN	SUNW.OPEN	XOM.OPEN
INTC.UCLOSE	SPX.UCLOSE	SUNW.UCLOSE	XOM.UCLOSE
INTC.UHIGH	SPX.UHIGH	SUNW.UHIGH	XOM.UHIGH
INTC.ULOW	SPX.ULOW	SUNW.ULOW	XOM.ULOW
INTC.UOPEN	SPX.UOPEN	SUNW.UOPEN	XOM.UOPEN
INTC.UVOLUME	SPX.UVOLUME	SUNW.UVOLUME	XOM.UVOLUME
INTC.VOLUME	SPX.VOLUME	SUNW.VOLUME	XOM.VOLUME

Instead of using two namelists, you can use the WHERE= clause in an INSET= option to perform the crossproduct of the BY variables specified in your input data set via the WHERE= clause, with the members named in your namelist. The following statements define a SAS input data set named INSETA to use as input for the CROSSLIST= option instead of using the Fame namelist:

```
DATA INSETA;
  LENGTH tick $5;
  /* AOL, C, CVX, F, GM, HPQ, IBM, INDUA, INTC, SPX, SUNW, XOM */
  tick='AOL'; output;
  tick='C'; output;
  tick='CVX'; output;
  tick='F'; output;
  tick='GM'; output;
  tick='HPQ'; output;
  tick='IBM'; output;
  tick='INDUA'; output;
  tick='INTC'; output;
  tick='SPX'; output;
  tick='SUNW'; output;
  tick='XOM'; output;
RUN;
```

```
LIBNAME test sasefame 'physical name of test database'
      RANGE='01jan1999'd - '31mar1999'd
      INSET=(inseta, where=tick)
      CROSSLIST=(
          {adjust, close, high, low, open, volume,
            uclose, uhigh, ulow, uopen, uvolume})
      ;
```

Whether you use a SAS INSET statement with a WHERE clause or you use a Fame namelist in the CROSSLIST= statement, the two methods are equivalent ways of performing the same selection function. In the preceding example, the Fame ticker namelist corresponds to the SAS input data set's BY variable named TICK.

Note that the WHERE=*fame_bygroup* must match the BY variable name used in your input data set in order for the CROSSLIST= option to perform the desired selection. If one of the time series listed in *fame_namelist2* does not exist, the SASEFAME engine stops processing the remainder of the namelist. For complete results, make sure that your *fame_namelist2* is accurate and does not name unknown variables. The same holds true for *fame_namelist1* and the BY variable values named in your input data set and used in your WHERE= clause.

Examples: SASEFAME Interface Engine

In this section, the examples were run on Windows, so the physical names used in the LIBNAME *libref* SASEFAME statement reflect the syntax necessary for that platform. In general, the Windows environments use backslashes in their pathname, and the UNIX environments use forward slashes.

Example 40.1: Converting an Entire Fame Database

To enable conversion of all time series no wildcard is specified, so the default “?” wildcard is used. Always consider both the number of time series and the number of observations generated by the conversion process. The converted series reside in the Fame Work database during the SAS DATA step. You can further limit your resulting SAS data set by using KEEP, DROP, or WHERE statements inside your DATA step.

The following statements convert a Fame database and print out its contents:

```
options pagesize=60 linesize=80 validvarname=any ;
%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname famedir sasefame "%sysget(FAME_DATA)"
      convert=(freq=annual technique=constant);
```

```

libname mydir "%sysget (FAME_TEMP) ";

data mydir.a; /* add data set to mydir */
    set famedir.oecd1;
    /* Read in oecd1.db data from the Organization */
    /* For Economic Cooperation and Development */
    where date between '01jan88'd and '31dec93'd;
run;

proc print data=mydir.a;
run;

```

In the preceding example, the Fame database is called oecd1.db and it resides in the famedir directory. The DATA statement names the SAS output data set 'a', that will reside in mydir. All time series in the Fame oecd1.db database will be converted to an annual frequency and reside in the mydir.a SAS data set. Since the time series variable names contain the special glue symbol '.', the SAS option statement specifies VALIDVARNAME=ANY. See the *SAS System Options: Reference* for more information about this option. The Fame environment variable is the location of the Fame installation. On Windows, the log would look like this:

```

1          options validvarname=any;

2          %let FAME=%sysget (FAME);
3          %put (&FAME);
(C:\PROGRA~1\FAME)
4          %let FAMETEMP=%sysget (FAME_TEMP);
5          %put (&FAMETEMP);
(\\ge\U11\saskff\fametemp\
6
7          libname famedir sasefame "&FAME\util"
8          convert=(freq=annual technique=constant);
NOTE: Libref FAMEDIR was successfully assigned as follows:
      Engine:          FAMECHLI
      Physical Name: C:\PROGRA~1\FAME\util
9
10         libname mydir '\\dntsrc\usrtmp\saskff';
NOTE: Libref MYDIR was successfully assigned as follows:
      Engine:          V9
      Physical Name: \\dntsrc\usrtmp\saskff
11
12         data mydir.a; /* add data set to mydir */
13         set famedir.oecd1;
AUS.DIRDES -- SERIES (NUMERIC by ANNUAL)
AUS.DIRDES copied to work data base as AUS.DIRDES.

```

For more about the glue DOT character, refer to “Gluing Names Together” in the *User’s Guide to Fame*. In the preceding log, the variable name AUS.DIRDES uses the glue DOT between AUS and DIRDES.

The PROC PRINT statement creates [Output 40.1.1](#) which shows all of the observations in the mydir.a SAS data set.

Output 40.1.1 Listing of OUT=MYDIR.A of the OECD1 Fame Data

AUS. AUT. BEL. CAN.									
Obs	DATE	DIRDES	AUS.HERD	DIRDES	AUT.HERD	DIRDES	BEL.HERD	DIRDES	CAN.HERD
1	1988	750	1072.90	.	.	374	16572.70	1589.60	2006
2	1989	18310.70	1737.00	2214
3	1990	18874.20	1859.20	2347
4	1991	1959.60	2488
CHE. DEU. DNK. ESP.									
Obs	DIRDES	CHE.HERD	DIRDES	DEU.HERD	DIRDES	DNK.HERD	DIRDES	ESP.HERD	
1	632.100	1532	3538.60	8780.00	258.100	2662	508.200	55365.5	
2	.	1648	3777.20	9226.60	284.800	2951	623.600	69270.5	
3	.	.	2953.30	9700.00	.	.	723.600	78848.0	
4	89908.0	
FIN. FRA. GBR. GRC.									
Obs	DIRDES	FIN.HERD	DIRDES	FRA.HERD	DIRDES	GBR.HERD	DIRDES	GRC.HERD	
1	247.700	1602.0	2573.50	19272.00	2627.00	1592.00	60.600	6674.50	
2	259.700	1725.5	2856.50	21347.80	2844.10	1774.20	119.800	14485.20	
3	271.000	1839.0	3005.20	22240.00	
4	
IRL. ISL. ITA. JPN.									
Obs	DIRDES	IRL.HERD	DIRDES	ISL.HERD	DIRDES	ITA.HERD	DIRDES	JPN.HERD	
1	49.6000	37.0730	.	.	1861.50	2699927	9657.20	2014073	
2	50.2000	39.0130	10.3000	786.762	1968.00	2923504	10405.90	2129372	
3	51.7000	.	11.0000	902.498	2075.00	3183071	.	2296992	
4	.	.	11.8000	990.865	2137.80	3374000	.	.	
NLD. NOR. NZL. PRT. SWE.									
Obs	DIRDES	NLD.HERD	DIRDES	NOR.HERD	DIRDES	NZL.HERD	DIRDES	PRT.HERD	SWE.HERD
1	883	2105	111.5	10158.20	.
2	945	2202	308.900	2771.40	78.7000	143.800	.	.	1076
3
4	.	.	352.000	3100.00
TUR. USA. YUG.									
Obs	SWE.HERD	DIRDES	TUR.HERD	DIRDES	USA.HERD	DIRDES	YUG.HERD		
1	.	174.400	74474	20246.20	20246.20	233.000	29.81		
2	11104	212.300	143951	22159.50	22159.50	205.100	375.22		
3	.	.	.	23556.10	23556.10	.	2588.50		
4	.	.	.	24953.80	24953.80	.	.		

Example 40.2: Reading Time Series from the Fame Database

This example uses the Fame wildcard option to limit the number of series converted. The following statements show how to read only series that start with WSPCA.

```
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname lib1 sasefame "%sysget(FAME_DATA)"
           wildcard="wspca?"
           convert=(technique=constant freq=twicemonthly );

libname lib2 "%sysget(FAME_TEMP)";

data lib2.twild(label='Annual Series from the FAMEECON.db');
  set lib1.subecon;
  where date between '01jan93'd and '31dec93'd;
  /* keep only */
  keep date wspca;
run;

proc contents data=lib2.twild;
run;

proc print data=lib2.twild;
run;
```

Output 40.2.1 and Output 40.2.2 show the results of using WILDCARD="WSPCA?".

Output 40.2.1 Contents of OUT=LIB2.TWILD of the SUBECON Fame Data

The CONTENTS Procedure					
Alphabetic List of Variables and Attributes					
#	Variable	Type	Len	Format	Informat Label
1	DATE	Num	8	DATE9.	9. Date of Observation
2	WSPCA	Num	8		STANDARD & POOR'S WEEKLY BOND YIELD: COMPOSITE, A

The WILDCARD="WSPCA?" option limits reading to only those series whose names begin with WSPCA. The KEEP statement further restricts the SAS data set to include only the series named WSPCA and the DATE variable. The time interval used for the conversion is TWICEMONTHLY.

Output 40.2.2 Listing of OUT=LIB2.TWILD of the SUBECON Fame Data

Obs	DATE	WSPCA
1	01JAN1993	8.59400
2	16JAN1993	8.50562
3	01FEB1993	8.47000
4	16FEB1993	8.31000
5	01MAR1993	8.27000
6	16MAR1993	8.29250
7	01APR1993	8.32400
8	16APR1993	8.56333
9	01MAY1993	8.37867
10	16MAY1993	8.26312
11	01JUN1993	8.21333
12	16JUN1993	8.14400
13	01JUL1993	8.09067
14	16JUL1993	8.09937
15	01AUG1993	7.98533
16	16AUG1993	7.91600

Example 40.3: Writing Time Series to the SAS Data Set

The following statements use the DROP statement to exclude certain time series from the SAS data set. (You can also use the KEEP statement to include certain series in the SAS data set.)

```
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname famedir sasefame "%sysget(FAME_DATA)"
        convert=(freq=annual technique=constant);

libname mydir "%sysget(FAME_TEMP)";

data mydir.a; /* add data set to mydir */
    set famedir.oecd1;
    drop 'ita.dirdes'n--'jpn.herd'n 'tur.dirdes'n--'usa.herd'n;
    where date between '01jan88'd and '31dec93'd;
run;

title1 "OECD1: TECH=Constant, FREQ=Annual";
title2 "Drop Using N-literals";

proc print data=mydir.a;
run;
```

Output 40.3.1 shows the results.

Output 40.3.1 Listing of OUT=MYDIR.A of the OECD1 Fame Data

OECD1: TECH=Constant, FREQ=Annual Drop Using N-literals									
		AUS.		AUT.		BEL.		CAN.	
Obs	DATE	DIRDES	AUS.HERD	DIRDES	AUT.HERD	DIRDES	BEL.HERD	DIRDES	CAN.HERD
1	1988	750	1072.90	.	.	374	16572.70	1589.60	2006
2	1989	18310.70	1737.00	2214
3	1990	18874.20	1859.20	2347
4	1991	1959.60	2488
		CHE.		DEU.		DNK.		ESP.	
Obs	DIRDES	CHE.HERD	DIRDES	DEU.HERD	DIRDES	DNK.HERD	DIRDES	ESP.HERD	
1	632.100	1532	3538.60	8780.00	258.100	2662	508.200	55365.5	
2	.	1648	3777.20	9226.60	284.800	2951	623.600	69270.5	
3	.	.	2953.30	9700.00	.	.	723.600	78848.0	
4	89908.0	
		FIN.		FRA.		GBR.		GRC.	
Obs	DIRDES	FIN.HERD	DIRDES	FRA.HERD	DIRDES	GBR.HERD	DIRDES	GRC.HERD	
1	247.700	1602.0	2573.50	19272.00	2627.00	1592.00	60.600	6674.50	
2	259.700	1725.5	2856.50	21347.80	2844.10	1774.20	119.800	14485.20	
3	271.000	1839.0	3005.20	22240.00	
4	
		IRL.		ISL.		NLD.		NOR.	
Obs	DIRDES	IRL.HERD	DIRDES	ISL.HERD	DIRDES	NLD.HERD	DIRDES	NOR.HERD	
1	49.6000	37.0730	.	.	883	2105	.	.	
2	50.2000	39.0130	10.3000	786.762	945	2202	308.900	2771.40	
3	51.7000	.	11.0000	902.498	
4	.	.	11.8000	990.865	.	.	352.000	3100.00	
		NZL.		PRT.		SWE.		YUG.	
Obs	DIRDES	NZL.HERD	DIRDES	PRT.HERD	DIRDES	SWE.HERD	DIRDES	YUG.HERD	
1	.	.	111.5	10158.20	.	.	233.000	29.81	
2	78.7000	143.800	.	.	1076	11104	205.100	375.22	
3	2588.50	
4	

Note that the SAS option VALIDVARNAME=ANY was used at the beginning of this example because special characters are present in the time series names. SAS variables that contain certain special characters are called *n-literals* and are referenced in SAS code as shown in this example.

You can rename your SAS variables by using the RENAME statement. The following statements show how to use *n-literals* when selecting variables you want to keep, and how to rename some of your kept variables:

```
options validvarname=any;
```

```
%let FAME=%sysget(FAME);
```

```
%put (&FAME);
```

```

%let FAMETEMP=%sysget (FAME_TEMP);
%put (&FAMETEMP);

libname famedir sasefame "%sysget (FAME_DATA) "
        convert=(freq=annual technique=constant);

libname mydir "%sysget (FAME_TEMP) ";

data mydir.a; /* add data set to mydir */
    set famedir.oecd1;
    /* keep and rename */
    keep date 'ita.dirdes'n--'jpn.herd'n 'tur.dirdes'n--'usa.herd'n;
    rename 'ita.dirdes'n='italy.dirdes'n
           'jpn.dirdes'n='japan.dirdes'n
           'tur.dirdes'n='turkey.dirdes'n
           'usa.dirdes'n='united.states.of.america.dirdes'n ;

run;

title1 "OECD1: TECH=Constant, FREQ=Annual";
title2 "keep statement using n-literals";
title3 "rename statement using n-literals";

proc print data=mydir.a;
run;

```

Output 40.3.2 shows the results.

Output 40.3.2 Listing of OUT=MYDIR.A of the OECD1 Fame Data

OECD1: TECH=Constant, FREQ=Annual keep statement using n-literals rename statement using n-literals					
Obs	DATE	italy. dirdes	ITA.HERD	japan. dirdes	JPN.HERD
1	1985	1344.90	1751008	8065.70	1789780
2	1986	1460.60	2004453	8290.10	1832575
3	1987	1674.40	2362102	9120.80	1957921
4	1988	1861.50	2699927	9657.20	2014073
5	1989	1968.00	2923504	10405.90	2129372
6	1990	2075.00	3183071	.	2296992
7	1991	2137.80	3374000	.	.
Obs	turkey. dirdes	TUR.HERD	united.states. of.america. dirdes	USA.HERD	
1	144.800	22196	14786.00	14786.00	
2	136.400	26957	16566.90	16566.90	
3	121.900	32309	18326.10	18326.10	
4	174.400	74474	20246.20	20246.20	
5	212.300	143951	22159.50	22159.50	
6	.	.	23556.10	23556.10	
7	.	.	24953.80	24953.80	

Example 40.4: Limiting the Time Range of Data

You can also limit the time range of the data in the SAS data set by using the RANGE= option in the LIBNAME statement or the WHERE statement in the DATA step to process the time ID variable DATE only when it falls in the range you are interested in.

All data for 1988, 1989, and 1990 are included in the SAS data set that is generated by using the RANGE='01JAN1988'D - '31DEC1990'D option or the WHERE DATE BETWEEN '01JAN88'D AND '31DEC90'D statement. The difference is that the range option uses less space in your Fame Work database. If you have a very large database and you want to use less space in your Fame Work database while you are processing the oecd1 database, you should use the RANGE= option as shown in the following statements:

```
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname famedir SASEFAME "%sysget(FAME_DATA)"
        convert=(freq=annual technique=constant)
        range='01jan1988'd - '31dec1990'd;

libname mydir "%sysget(FAME_TEMP)";

data mydir.a; /* add data set to mydir */
    set famedir.oecd1;
    /* range on the libref restricts the dates *
    * read from famedir's oecd1 database      */
run;

title1 "OECD1: TECH=Constant, FREQ=Annual";
proc print data=mydir.a;
run;
```

Output 40.4.1 shows the results.

Output 40.4.1 Listing of OUT=MYDIR.A of the OECD1 Fame Data Using RANGE= Option

OECD1: TECH=Constant, FREQ=Annual									
		AUS.		AUT.		BEL.		CAN.	
Obs	DATE	DIRDES	AUS.HERD	DIRDES	AUT.HERD	DIRDES	BEL.HERD	DIRDES	CAN.HERD
1	1988	750	1072.90	.	.	374	16572.70	1589.60	2006
2	1989	18310.70	1737.00	2214
3	1990	18874.20	1859.20	2347
		CHE.		DEU.		DNK.		ESP.	
Obs	DIRDES	CHE.HERD	DIRDES	DEU.HERD	DIRDES	DNK.HERD	DIRDES	ESP.HERD	
1	632.100	1532	3538.60	8780.00	258.100	2662	508.200	55365.5	
2	.	1648	3777.20	9226.60	284.800	2951	623.600	69270.5	
3	.	.	2953.30	9700.00	.	.	723.600	78848.0	
		FIN.		FRA.		GBR.		GRC.	
Obs	DIRDES	FIN.HERD	DIRDES	FRA.HERD	DIRDES	GBR.HERD	DIRDES	GRC.HERD	
1	247.700	1602.0	2573.50	19272.00	2627.00	1592.00	60.600	6674.50	
2	259.700	1725.5	2856.50	21347.80	2844.10	1774.20	119.800	14485.20	
3	271.000	1839.0	3005.20	22240.00	
		IRL.		ISL.		ITA.		JPN.	
Obs	DIRDES	IRL.HERD	DIRDES	ISL.HERD	DIRDES	ITA.HERD	DIRDES	JPN.HERD	
1	49.6000	37.0730	.	.	1861.5	2699927	9657.20	2014073	
2	50.2000	39.0130	10.3000	786.762	1968.0	2923504	10405.90	2129372	
3	51.7000	.	11.0000	902.498	2075.0	3183071	.	2296992	
		NLD.		NOR.		NZL.		PRT.	
Obs	DIRDES	NLD.HERD	DIRDES	NOR.HERD	DIRDES	NZL.HERD	DIRDES	PRT.HERD	SWE.
1	883	2105	111.5	10158.20	.
2	945	2202	308.900	2771.40	78.7000	143.800	.	.	1076
3
		TUR.		USA.		YUG.			
Obs	SWE.HERD	DIRDES	TUR.HERD	DIRDES	USA.HERD	DIRDES	YUG.HERD		
1	.	174.400	74474	20246.20	20246.20	233.000	29.81		
2	11104	212.300	143951	22159.50	22159.50	205.100	375.22		
3	.	.	.	23556.10	23556.10	.	2588.50		

The following statements show how you can use the WHERE statement in the DATA step to process the time ID variable DATE only when it falls in the range you are interested in:

```
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);
```

```

libname famedir SASEFAME "%sysget(FAME_DATA) "
      convert=(freq=annual technique=constant);

libname mydir "%sysget(FAME_TEMP) ";

data mydir.a; /* add data set to mydir */
  set famedir.oecd1;
  /* where only */
  where date between '01jan88'd and '31dec90'd;
run;

title1 "OECD1: TECH=Constant, FREQ=Annual";
proc print data=mydir.a;
run;

```

In [Output 40.4.2](#), you can see that the result from the WHERE statement is the same as the result in [Output 40.4.1](#) using the RANGE= option.

Output 40.4.2 Listing of OUT=MYDIR.A of the OECD1 Fame Data Using WHERE Statement

OECD1: TECH=Constant, FREQ=Annual									
		AUS.		AUT.		BEL.		CAN.	
Obs	DATE	DIRDES	AUS.HERD	DIRDES	AUT.HERD	DIRDES	BEL.HERD	DIRDES	CAN.HERD
1	1988	750	1072.90	.	.	374	16572.70	1589.60	2006
2	1989	18310.70	1737.00	2214
3	1990	18874.20	1859.20	2347
		CHE.		DEU.		DNK.		ESP.	
Obs	DIRDES	CHE.HERD	DIRDES	DEU.HERD	DIRDES	DNK.HERD	DIRDES	ESP.HERD	
1	632.100	1532	3538.60	8780.00	258.100	2662	508.200	55365.5	
2	.	1648	3777.20	9226.60	284.800	2951	623.600	69270.5	
3	.	.	2953.30	9700.00	.	.	723.600	78848.0	
		FIN.		FRA.		GBR.		GRC.	
Obs	DIRDES	FIN.HERD	DIRDES	FRA.HERD	DIRDES	GBR.HERD	DIRDES	GRC.HERD	
1	247.700	1602.0	2573.50	19272.00	2627.00	1592.00	60.600	6674.50	
2	259.700	1725.5	2856.50	21347.80	2844.10	1774.20	119.800	14485.20	
3	271.000	1839.0	3005.20	22240.00	
		IRL.		ISL.		ITA.		JPN.	
Obs	DIRDES	IRL.HERD	DIRDES	ISL.HERD	DIRDES	ITA.HERD	DIRDES	JPN.HERD	
1	49.6000	37.0730	.	.	1861.5	2699927	9657.20	2014073	
2	50.2000	39.0130	10.3000	786.762	1968.0	2923504	10405.90	2129372	
3	51.7000	.	11.0000	902.498	2075.0	3183071	.	2296992	
		NLD.		NOR.		NZL.		PRT.	
Obs	DIRDES	NLD.HERD	DIRDES	NOR.HERD	DIRDES	NZL.HERD	DIRDES	PRT.HERD	SWE.
1	883	2105	111.5	10158.20	.
2	945	2202	308.900	2771.40	78.7000	143.800	.	.	1076
3
		TUR.		USA.		YUG.			
Obs	SWE.HERD	DIRDES	TUR.HERD	DIRDES	USA.HERD	DIRDES	YUG.HERD		
1	.	174.400	74474	20246.20	20246.20	233.000	29.81		
2	11104	212.300	143951	22159.50	22159.50	205.100	375.22		
3	.	.	.	23556.10	23556.10	.	2588.50		

See *SAS Language Reference: Concepts* for more information about KEEP, DROP, RENAME, and WHERE statements.

Example 40.5: Creating a View Using the SQL Procedure and SASEFAME

The following statements create a view of OECD data by using the SQL procedure's FROM and USING clauses: See the *BASE SAS Procedures Guide* for details about SQL views.

```

title1 'famesql5: PROC SQL Dual Embedded Libraries w/ FAME option';
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

title2 'OECD1: Dual Embedded Library Allocations with FAME Option';
proc sql;
  create view fameview as
    select date, 'fin.herd'n
      from lib1.oecd1
    using libname lib1 sasefame "%sysget(FAME_DATA)"
          convert=(tech=constant freq=annual),
          libname temp "%sysget(FAME_TEMP)";
quit;

title2 'OECD1: Print of View from Embedded Library with FAME Option';
proc print data=fameview;
run;

```

Output 40.5.1 shows the results.

Output 40.5.1 Printout of the Fame View of OECD Data

famesql5: PROC SQL Dual Embedded Libraries w/ FAME option			
OECD1: Print of View from Embedded Library with FAME Option			
	Obs	DATE	FIN.HERD
	1	1985	1097.00
	2	1986	1234.00
	3	1987	1401.30
	4	1988	1602.00
	5	1989	1725.50
	6	1990	1839.00
	7	1991	.

The following statements create a view of Data Resources Inc. (DRI) Basic Economic data by using the SQL procedure's FROM and USING clauses:

```

title2 'SUBECON: Dual Embedded Library Allocations with FAME Option';
options validvarname=any;

%let FAME=%sysget(FAME);

```

```

%put (&FAME);
%let FAMETEMP=%sysget (FAME_TEMP);
%put (&FAMETEMP);

proc sql;
  create view fameview as
  select date, gaa
    from lib1.subecon
    using libname lib1 sasefame "%sysget (FAME_DATA) "
                                convert=(tech=constant freq=annual),
                                libname temp "%sysget (FAME_TEMP) ";
quit;

title2 'SUBECON: Print of View from Embedded Library with FAME Option';
proc print data=fameview;
run;

```

Output 40.5.2 shows the results.

Output 40.5.2 Printout of the Fame View of DRI Basic Economic Data

```
famesql5: PROC SQL Dual Embedded Libraries w/ FAME option
SUBECON: Print of View from Embedded Library with FAME Option
```

Obs	DATE	GAA
1	1946	.
2	1947	.
3	1948	23174
4	1949	19003
5	1950	24960
6	1951	21906
7	1952	20246
8	1953	20912
9	1954	21056
10	1955	27168
11	1956	27638
12	1957	26723
13	1958	22929
14	1959	29729
15	1960	28444
16	1961	28226
17	1962	32396
18	1963	34932
19	1964	40024
20	1965	47941
21	1966	51429
22	1967	49164
23	1968	51208
24	1969	49371
25	1970	44034
26	1971	52352
27	1972	62644
28	1973	81645
29	1974	91028
30	1975	89494
31	1976	109492
32	1977	130260
33	1978	154357
34	1979	173428
35	1980	156096
36	1981	147765
37	1982	113216
38	1983	133495
39	1984	146448
40	1985	128522
41	1986	111338
42	1987	160785
43	1988	210532
44	1989	201637
45	1990	218702
46	1991	210666
47	1992	.
48	1993	.

The following statements create a view of the DB77 database by using the SQL procedure's FROM and USING clauses:

```

title2 'DB77: Dual Embedded Library Allocations with FAME Option';
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

proc sql;
    create view fameview as
        select date, ann, 'qandom.x'n
        from lib1.db77
        using libname lib1 sasefame "%sysget(FAME_DATA)"
            convert=(tech=constant freq=annual),
            libname temp "%sysget(FAME_TEMP)";
quit;

title2 'DB77: Print of View from Embedded Library with FAME Option';
proc print data=fameview;
run;

```

[Output 40.5.3](#) shows the results.

Output 40.5.3 Printout of the Fame View of DB77 Data

famesql5: PROC SQL Dual Embedded Libraries w/ FAME option DB77: Print of View from Embedded Library with FAME Option			
Obs	DATE	ANN	QANDOM.X
1	1959	.	0.56147
2	1960	.	0.51031
3	1961	.	.
4	1962	.	.
5	1963	.	.
6	1964	.	.
7	1965	.	.
8	1966	.	.
9	1967	.	.
10	1968	.	.
11	1969	.	.
12	1970	.	.
13	1971	.	.
14	1972	.	.
15	1973	.	.
16	1974	.	.
17	1975	.	.
18	1976	.	.
19	1977	.	.
20	1978	.	.
21	1979	.	.
22	1980	100	.
23	1981	101	.
24	1982	102	.
25	1983	103	.
26	1984	104	.
27	1985	105	.
28	1986	106	.
29	1987	107	.
30	1988	109	.
31	1989	111	.

The following statements create a view of the Data Resources Incorporated (DRI) economic database by using the SQL procedure's FROM and USING clauses:

```

title2 'DRIECON: Dual Embedded Library Allocations with FAME Option';
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

proc sql;
  create view fameview as
    select date, husts
    from lib1.driecon
    using libname lib1 sasefame "%sysget(FAME_DATA)"

```

```

                                convert=(tech=constant freq=annual)
                                range='01jan1980'd - '01jan2006'd ,
                                libname temp "%sysget(FAME_TEMP)";
quit;

title2 'DRIECON: Print of View from Embedded Library with FAME Option';
proc print data=fameview;
run;

```

The SAS option VALIDVARNAME=ANY is used at the beginning of this example because special characters are present in the time series names. The output from this example shows how each Fame view is the output of the SASEFAME engine's processing. Different engine options could have been used in the USING LIBNAME clause if desired. [Output 40.5.4](#) shows the results.

Output 40.5.4 Printout of the Fame View of DRI Basic Economic Data

```

famesql5: PROC SQL Dual Embedded Libraries w/ FAME option
DRIECON: Print of View from Embedded Library with FAME Option

```

Obs	DATE	HUSTS
1	1980	1292.2
2	1981	1084.2
3	1982	1062.2
4	1983	1703.0
5	1984	1749.5
6	1985	1741.8
7	1986	1805.4
8	1987	1620.5
9	1988	1488.1
10	1989	1376.1
11	1990	1192.7
12	1991	1013.9
13	1992	1199.7
14	1993	1287.6
15	1994	1457.0
16	1995	1354.1
17	1996	1476.8
18	1997	1474.0
19	1998	1616.9
20	1999	1666.5
21	2000	1568.7
22	2001	1602.7
23	2002	1704.9
24	2003	.

Example 40.6: Reading Other Fame Data Objects with the FAMEOUT= Option

This example shows how you can designate the data objects that are output to your SAS data set by using the FAMEOUT= option. In this example, the FAMEOUT=FORMULA option selects the formulas and their source definitions to be output. The RANGE= option is ignored since no time series are selected when

FAMEOUT=FORMULA is specified.

```
options validvarname=any ls=90;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname lib6 sasefame "%sysget(FAME_DATA)"
    fameout=formula
    convert=(frequency=business technique=constant)
    range='02jan1995'd - '25jul1997'd
    wildcard="?YIELD?" ;

data crout;
    set lib6.training;
    keep 'S.GM.YIELD.A'n -- 'S.XON.YIELD.A'n ;
run;

title1 'Formulas from the TRAINING DB, FAMEOUT=FORMULA Option';
title2 'Using WILDCARD="?YIELD?"';
proc contents
    data=crout;
run;
```

Output 40.6.1 shows the results.

Output 40.6.1 Contents of OUT=CROUT from the FAMEOUT=FORMULA Option of the Training Fame Data

Formulas from the TRAINING DB, FAMEOUT=FORMULA Option Using WILDCARD="?YIELD?"			
The CONTENTS Procedure			
Alphabetic List of Variables and Attributes			
#	Variable	Type	Len
1	S.GM.YIELD.A	Char	82
2	S.GM_PP.YIELD.A	Char	82
3	S.HWP.YIELD.A	Char	82
4	S.IBM.YIELD.A	Char	82
5	S.INDUT.YIELD.A	Char	82
6	S.SPAL.YIELD.A	Char	82
7	S.SPALN.YIELD.A	Char	82
8	S.SUNW.YIELD.A	Char	82
9	S.XOM.YIELD.A	Char	82
10	S.XON.YIELD.A	Char	82

The FAMEOUT=FORMULA option restricts the SAS data set to include only formulas. The WILDCARD="?YIELD?" option further limits the selection of formulas to those whose names contain "YIELD".

```

options validvarname=any linesize=79;

title1 'Formulas from the TRAINING DB, FAMEOUT=FORMULA Option';
title2 'Using WILDCARD="?YIELD?"';
proc print
    data=crouit noobs;
run;

```

Output 40.6.2 shows the results.

Output 40.6.2 Listing of OUT=CROUT from the FAMEOUT=FORMULA Option of the TRAINING Fame Data

```

      Formulas from the TRAINING DB, FAMEOUT=FORMULA Option
      Using WILDCARD="?YIELD?"

      S.GM.YIELD.A
(%SPLC2TF(C37044210X01, IAD_DATE.H, IAD.H)/C37044210X01.CLOSE)*C37044210X01.ADJ

      S.GM_PP.YIELD.A
(%SPLC2TF(C37044210X01, IAD_DATE.H, IAD.H)/C37044210X01.CLOSE)*C37044210X01.ADJ

      S.HWP.YIELD.A
(%SPLC2TF(C42823610X01, IAD_DATE.H, IAD.H)/C42823610X01.CLOSE)*C42823610X01.ADJ

      S.IBM.YIELD.A
(%SPLC2TF(C45920010X01, IAD_DATE.H, IAD.H)/C45920010X01.CLOSE)*C45920010X01.ADJ

      S.INDUT.YIELD.A
(%SPLC2TF(C00000110X00, IAD_DATE.H, IAD.H)/C00000110X00.CLOSE)*C00000110X00.ADJ

      S.SPAL.YIELD.A
(%SPLC2TF(C00000117X00, IAD_DATE.H, IAD.H)/C00000117X00.CLOSE)*C00000117X00.ADJ

      S.SPALN.YIELD.A
(%SPLC2TF(C00000117X00, IAD_DATE.H, IAD.H)/C00000117X00.CLOSE)*C00000117X00.ADJ

      S.SUNW.YIELD.A
(%SPLC2TF(C86681010X60, IAD_DATE.H, IAD.H)/C86681010X60.CLOSE)*C86681010X60.ADJ

      S.XOM.YIELD.A
(%SPLC2TF(C30231G10X01, IAD_DATE.H, IAD.H)/C30231G10X01.CLOSE)*C30231G10X01.ADJ

      S.XON.YIELD.A
(%SPLC2TF(C30231G10X01, IAD_DATE.H, IAD.H)/C30231G10X01.CLOSE)*C30231G10X01.ADJ

```

Additional examples of the FAMEOUT= option are shown in [Example 40.11](#), [Example 40.12](#), [Example 40.13](#), [Example 40.14](#), and [Example 40.15](#).

Example 40.7: Remote Fame Access Using Fame CHLI

When you run Fame in a client/server environment and also have Fame CHLI capability enabling access to the server, you can access Fame remote data. Access the remote data by specifying the port number of the TCP/IP service that is defined for the frdb_m and the node name of the Fame master server in the physical path. In this example, the Fame server node name is STONES, and the port number is 5555, as was designated in the Fame master command. See the section “Starting the Master Server” in the *Guide to Fame Database Servers* for more information about starting your Fame master server.

```
options ls=78;
title1 "DRIECON Database, Using FAME with Remote Access Via CHLI";

libname test1 sasefame '#5555@stones $FAME/util';

data a;
    set test1.driecon;
    keep YP ZA ZB;
    where date between '01jan98'd and '31dec03'd;
run;

proc means data=a n;
run;
```

[Output 40.7.1](#) shows the results.

Output 40.7.1 Summary Statistics for the Remote FAME Data

DRIECON Database, Using FAME with Remote Access Via CHLI		
The MEANS Procedure		
Variable	Label	N
YP	PERSONAL INCOME	5
ZA	CORPORATE PROFITS AFTER TAX EXCLUDING IVA	4
ZB	CORPORATE PROFITS BEFORE TAX EXCLUDING IVA	4

Example 40.8: Selecting Time Series Using CROSSLIST= Option and KEEP Statement

This example shows how to use two Fame namelists to perform selection. Note that *fame_namelist1* could be easily generated using the Fame WILDLIST function. For more about WILDLIST, see the section “The WILDLIST Function” in the *Fame Command Reference Volume 2, Functions*. In the following statements, four tickers are selected in *fame_namelist1*, but when you use the KEEP statement, the resulting data set contains only the desired IBM ticker.

```
libname lib8 sasefame "%sysget(FAME_DATA) "
      convert=(frequency=business technique=constant)
      crosslist=(
        { IBM, SPALN, SUNW, XOM },
        { adjust, close, high, low, open, volume,
          uclose, uhigh, ulow, uopen, uvolume }
      );

data trout;
  /* eleven companies, keep only the IBM ticker this time */
  set lib8.training;
  where date between '01mar02'd and '20mar02'd;
  keep IBM: ;
run;

title1 'TRAINING DB, Pricing Timeseries for IBM Ticker in CROSSLIST=';
proc contents
  data=trout;
run;

proc print
  data=trout;
run;
```

Output 40.8.1 and Output 40.8.2 show the results.

Output 40.8.1 Contents of the IBM Time Series in the Training Fame Data

TRAINING DB, Pricing Timeseries for IBM Ticker in CROSSLIST=				
The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	
1	IBM.ADJUST	Num	8	
2	IBM.CLOSE	Num	8	
3	IBM.HIGH	Num	8	
4	IBM.LOW	Num	8	
5	IBM.OPEN	Num	8	
6	IBM.UCLOSE	Num	8	
7	IBM.UHIGH	Num	8	
8	IBM.ULOW	Num	8	
9	IBM.UOPEN	Num	8	
10	IBM.UVOLUME	Num	8	
11	IBM.VOLUME	Num	8	

Output 40.8.2 Listing of Ticker IBM Time Series in the Training Fame Data

TRAINING DB, Pricing Timeseries for IBM Ticker in CROSSLIST=						
Obs	IBM.ADJUST	IBM.CLOSE	IBM.HIGH	IBM.LOW	IBM.OPEN	IBM.UCLOSE
1	1	103.020	103.100	98.500	98.600	103.020
2	1	105.900	106.540	103.130	103.350	105.900
3	1	105.670	106.500	104.160	104.250	105.670
4	1	106.300	107.090	104.750	105.150	106.300
5	1	103.710	107.500	103.240	107.300	103.710
6	1	105.090	107.340	104.820	104.820	105.090
7	1	105.240	105.970	103.600	104.350	105.240
8	1	108.500	108.850	105.510	105.520	108.500
9	1	107.180	108.650	106.700	108.300	107.180
10	1	106.600	107.950	106.590	107.020	106.600
11	1	106.790	107.450	105.590	106.550	106.790
12	1	106.350	108.640	106.230	107.100	106.350
13	1	107.490	108.050	106.490	106.850	107.490
14	1	105.500	106.900	105.490	106.900	105.500
Obs	IBM.UHIGH	IBM.ULOW	IBM.UOPEN	IBM.UVOLUME	IBM.VOLUME	
1	103.100	98.500	98.600	104890	104890	
2	106.540	103.130	103.350	107650	107650	
3	106.500	104.160	104.250	75617	75617	
4	107.090	104.750	105.150	76874	76874	
5	107.500	103.240	107.300	109720	109720	
6	107.340	104.820	104.820	107260	107260	
7	105.970	103.600	104.350	86391	86391	
8	108.850	105.510	105.520	110640	110640	
9	108.650	106.700	108.300	64086	64086	
10	107.950	106.590	107.020	53335	53335	
11	107.450	105.590	106.550	108640	108640	
12	108.640	106.230	107.100	53048	53048	
13	108.050	106.490	106.850	46148	46148	
14	106.900	105.490	106.900	48367	48367	

Example 40.9: Selecting Time Series Using CROSSLIST= Option and Fame Namelist

This example demonstrates selection by using the CROSSLIST= option. Only the ticker “IBM” is specified in the KEEP statement from the 11 companies in the Fame ticker namelist.

```
libname lib9 sasefame "%sysget(FAME_DATA)"
  convert=(frequency=business technique=constant)
  range='07jul1997'd - '25jul1997'd
  crosslist=( nl(ticker),
    { adjust, close, high, low, open, volume,
      uclose, uhigh, ulow, uopen, uvolume }
  );
```

```
data crout;
  /* eleven companies in the FAME ticker namelist */
  set lib9.training;
  keep IBM: ;
run;

title1 'TRAINING DB, Pricing Timeseries for Eleven Tickers in CROSSLIST=';
title2 'Using TICKER namelist.';
proc print data=crout;
run;

proc contents data=crout;
run;
```

Output 40.9.1 and Output 40.9.2 show the results.

Output 40.9.1 Listing of OUT=CROUT Using CROSSLIST= Option in the Training Fame Data

TRAINING DB, Pricing Timeseries for Eleven Tickers in CROSSLIST= Using TICKER namelist.						
Obs	IBM.ADJUST	IBM.CLOSE	IBM.HIGH	IBM.LOW	IBM.OPEN	IBM.UCLOSE
1	0.5	47.2500	47.7500	47.0000	47.5000	94.500
2	0.5	47.8750	47.8750	47.2500	47.2500	95.750
3	0.5	48.0938	48.3438	47.6563	48.0000	96.188
4	0.5	47.8750	48.0938	47.0313	47.3438	95.750
5	0.5	47.8750	48.6875	47.8125	47.9063	95.750
6	0.5	47.6250	48.2188	47.0000	47.8125	95.250
7	0.5	48.0000	48.1250	46.6875	47.4375	96.000
8	0.5	48.8125	49.0000	47.6875	47.8750	97.625
9	0.5	49.8125	50.8750	48.5625	48.9063	99.625
10	0.5	52.2500	52.6250	50.0000	50.0000	104.500
11	0.5	51.8750	53.1563	51.0938	52.6250	103.750
12	0.5	51.5000	51.7500	49.6875	50.0313	103.000
13	0.5	52.5625	53.5000	51.5938	52.1875	105.125
14	0.5	53.9063	54.2188	52.2500	52.8125	107.813
15	0.5	53.5000	54.2188	52.8125	53.9688	107.000
Obs	IBM.UHIGH	IBM.ULOW	IBM.UOPEN	IBM.UVOLUME	IBM.VOLUME	
1	95.500	94.000	95.000	129012	64506	
2	95.750	94.500	94.500	102796	51398	
3	96.688	95.313	96.000	177276	88638	
4	96.188	94.063	94.688	127900	63950	
5	97.375	95.625	95.813	137724	68862	
6	96.438	94.000	95.625	128976	64488	
7	96.250	93.375	94.875	149612	74806	
8	98.000	95.375	95.750	215440	107720	
9	101.750	97.125	97.813	315504	157752	
10	105.250	100.000	100.000	463480	231740	
11	106.313	102.188	105.250	328184	164092	
12	103.500	99.375	100.063	368276	184138	
13	107.000	103.188	104.375	219880	109940	
14	108.438	104.500	105.625	204088	102044	
15	108.438	105.625	107.938	146600	73300	

Output 40.9.2 Contents of OUT=CROUT Using CROSSLIST= Option in the Training Fame Data

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	
1	IBM.ADJUST	Num	8	
2	IBM.CLOSE	Num	8	
3	IBM.HIGH	Num	8	
4	IBM.LOW	Num	8	
5	IBM.OPEN	Num	8	
6	IBM.UCLOSE	Num	8	
7	IBM.UHIGH	Num	8	
8	IBM.ULOW	Num	8	
9	IBM.UOPEN	Num	8	
10	IBM.UVOLUME	Num	8	
11	IBM.VOLUME	Num	8	

Example 40.10: Selecting Time Series Using CROSSLIST= Option and WHERE=TICK

Instead of having a Fame namelist with the ticker symbols for companies whose data you are interested in, you can designate an input SAS data set (INSETA) that specifies the tickers to select. Specify your selection by using the WHERE clause in the INSET= option as shown in the following example:

```
data inseta;
  length tick $5;
  /* need $5 so SPALN is not truncated */

  tick='AOL';    output;
  tick='C';      output;
  tick='CPQ';    output;
  tick='CVX';    output;
  tick='F';      output;
  tick='GM';     output;
  tick='HWP';    output;
  tick='IBM';    output;
  tick='SPALN';  output;
  tick='SUNW';   output;
  tick='XOM';    output;
run;

libname lib10 sasefame "%sysget(FAME_DATA)"
  convert=(frequency=business technique=constant)
  range='07jul1997'd - '25jul1997'd
  inset=( inseta where=tick )
  crosslist=
    ( {adjust, close, high, low, open, volume,
      uclose, uhigh, ulow, uopen, uvolume} );
```

```

data trout;
  /* eleven companies with unique TICKs specified in INSETA */
  set lib10.training;
  keep IBM: ;
run;

title1 'TRAINING DB, Pricing Timeseries for Eleven Tickers in CROSSLIST=';
title2 'Using INSET with WHERE=TICK.';
proc print data=trout;
run;

proc contents data=trout;
run;

```

Output 40.10.1 and Output 40.10.2 show the results.

Output 40.10.1 Listing of OUT=TROUT Using CROSSLIST= and INSET= Options in the Training Fame Data

TRAINING DB, Pricing Timeseries for Eleven Tickers in CROSSLIST= Using INSET with WHERE=TICK.						
Obs	IBM.ADJUST	IBM.CLOSE	IBM.HIGH	IBM.LOW	IBM.OPEN	IBM.UCLOSE
1	0.5	47.2500	47.7500	47.0000	47.5000	94.500
2	0.5	47.8750	47.8750	47.2500	47.2500	95.750
3	0.5	48.0938	48.3438	47.6563	48.0000	96.188
4	0.5	47.8750	48.0938	47.0313	47.3438	95.750
5	0.5	47.8750	48.6875	47.8125	47.9063	95.750
6	0.5	47.6250	48.2188	47.0000	47.8125	95.250
7	0.5	48.0000	48.1250	46.6875	47.4375	96.000
8	0.5	48.8125	49.0000	47.6875	47.8750	97.625
9	0.5	49.8125	50.8750	48.5625	48.9063	99.625
10	0.5	52.2500	52.6250	50.0000	50.0000	104.500
11	0.5	51.8750	53.1563	51.0938	52.6250	103.750
12	0.5	51.5000	51.7500	49.6875	50.0313	103.000
13	0.5	52.5625	53.5000	51.5938	52.1875	105.125
14	0.5	53.9063	54.2188	52.2500	52.8125	107.813
15	0.5	53.5000	54.2188	52.8125	53.9688	107.000
Obs	IBM.UHIGH	IBM.ULOW	IBM.UOPEN	IBM.UVOLUME	IBM.VOLUME	
1	95.500	94.000	95.000	129012	64506	
2	95.750	94.500	94.500	102796	51398	
3	96.688	95.313	96.000	177276	88638	
4	96.188	94.063	94.688	127900	63950	
5	97.375	95.625	95.813	137724	68862	
6	96.438	94.000	95.625	128976	64488	
7	96.250	93.375	94.875	149612	74806	
8	98.000	95.375	95.750	215440	107720	
9	101.750	97.125	97.813	315504	157752	
10	105.250	100.000	100.000	463480	231740	
11	106.313	102.188	105.250	328184	164092	
12	103.500	99.375	100.063	368276	184138	
13	107.000	103.188	104.375	219880	109940	
14	108.438	104.500	105.625	204088	102044	
15	108.438	105.625	107.938	146600	73300	

Output 40.10.2 Contents of OUT=TROUT Using CROSSLIST= and INSET= Options in the Training Fame Data

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	
1	IBM.ADJUST	Num	8	
2	IBM.CLOSE	Num	8	
3	IBM.HIGH	Num	8	
4	IBM.LOW	Num	8	
5	IBM.OPEN	Num	8	
6	IBM.UCLOSE	Num	8	
7	IBM.UHIGH	Num	8	
8	IBM.ULOW	Num	8	
9	IBM.UOPEN	Num	8	
10	IBM.UVOLUME	Num	8	
11	IBM.VOLUME	Num	8	

Example 40.11: Selecting Boolean Case Series with the FAMEOUT= Option

This example shows how to extract all Boolean case series from the ALLTYPES Fame data base. The following statements write all Boolean case series to the BOOOOUT SAS data set.

```

title1 '***famallt: FAMEOUT Option, Different Type Values***';
options validvarname=any;

%let FAME=%sysget(FAME);
%put (&FAME);
%let FAMETEMP=%sysget(FAME_TEMP);
%put (&FAMETEMP);

libname lib4 sasefame "%sysget(FAME_DATA) "
    fameout=boolcase wildcard="?" ;

data booout;
    set lib4.alltypes;
run;

title1 'ALLTYPES FAMEOUT=BOOLCASE for Boolean Case Series';
title2 'Using FAMEOUT=CASE BOOLEAN Option without Range';
proc contents
    data=booout;
run;

proc print
    data=booout;
run;

```

Output 40.11.1 and Output 40.11.2 show the results for the Boolean case.

Output 40.11.1 Contents of OUT=BOOOOUT Using FAMEOUT=BOOLCASE for Boolean Case Series

ALLTYPES FAMEOUT=BOOLCASE for Boolean Case Series Using FAMEOUT=CASE BOOLEAN Option without Range				
The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	
1	BOO0	Num	8	
2	BOO1	Num	8	
3	BOO2	Num	8	
4	BOOM	Num	8	
5	BOO_RES	Num	8	

Output 40.11.2 Listing of OUT=BOOOOUT Using FAMEOUT=BOOLCASE for Boolean Case Series

ALLTYPES FAMEOUT=BOOLCASE for Boolean Case Series Using FAMEOUT=CASE BOOLEAN Option without Range						
Obs	BOO0	BOO1	BOO2	BOOM	BOO_RES	
1	0	1	0	1	.	
2	0	0	1	0	.	
3	0	0	0	251	.	
4	0	1	1	1	.	
5	0	1	0	1	.	
6	0	0	.	0	.	
7	0	0	.	0	.	
8	0	1	.	1	.	
9	0	.	0	.	.	
10	0	
11	1	
12	1	
13	1	.	1	.	.	
14	1	
15	1	
16	1	
17	1	.	0	.	.	
18	1	
19	1	
20	1	

Example 40.12: Selecting Numeric Case Series with the FAMEOUT= Option

This example extracts numeric case series. In addition to the already existing numeric case series in the Fame database, you can also have formulas that expand out to numeric case series. SASEFAME resolves all formulas that belong to the class and type of series data object that you specify in your FAMEOUT= option.

The following statements write all numeric case series to your SAS data set.

```
libname lib5 sasefame "%sysget(FAME_DATA) "
    fameout=case wildcard="?" ;

data csout;
    set lib5.alltypes;
run;

title1 'Using FAMEOUT=CASE Option without Range';
title2 'ALLTYPES, FAMEOUT=CASE and Open Wildcard for Numeric Case Series';
proc contents
    data=csout;
run;

proc print
    data=csout;
run;
```

Output 40.12.1 and Output 40.12.2 show the results.

Output 40.12.1 Contents of OUT=CSOUT Using FAMEOUT=CASE and Open Wildcard for Numeric Case Series

Using FAMEOUT=CASE Option without Range ALLTYPES, FAMEOUT=CASE and Open Wildcard for Numeric Case Series			
The CONTENTS Procedure			
Alphabetic List of Variables and Attributes			
#	Variable	Type	Len
1	FRM1	Num	8
2	NUM0	Num	8
3	NUM1	Num	8
4	NUM2	Num	8
5	NUMM	Num	8
6	NUM_RES	Num	8
7	PRC0	Num	8
8	PRC1	Num	8
9	PRC2	Num	8
10	PRCM	Num	8
11	PRC_RES	Num	8

Output 40.12.2 Listing of OUT=CSOUT Using FAMEOUT=CASE and Open Wildcard for Numeric Case Series

Using FAMEOUT=CASE Option without Range ALLTYPES, FAMEOUT=CASE and Open Wildcard for Numeric Case Series											
						N U M					P R C
O b s	F R M 1	N U 0	N U 1	N U 2	N U M	— R S	P R 0	P R 1	P R 2	P R M	— R S
1	0.00000	-9	0	1.33333	0	.	-18	0	1.33333	0	.
2	1.00000	-8	1	1.00000	1	.	-16	1	1.00000	1	.
3	0.66667	-7	2	0.66667	1.7014E38	.	-14	2	0.66667	1.7014E38	.
4	3.00000	-6	3	0.33333	3	.	-12	3	0.33333	3	.
5	4.00000	-5	4	0.00000	4	.	-10	4	0.00000	4	.
6	.	-4	5	.	5	.	-8	5	.	5	.
7	.	-3	6	.	6	.	-6	6	.	6	.
8	7.00000	-2	7	.	7	.	-4	7	.	7	.
9	.	-1	.	-1.33333	.	.	-2	.	-1.33333	.	.
10	.	0	0
11	.	1	2
12	.	2	4
13	.	3	.	-2.66667	.	.	6	.	-2.66667	.	.
14	.	4	8
15	.	5	10
16	.	6	12
17	.	7	.	-4.00000	.	.	14	.	-4.00000	.	.
18	.	8	16
19	.	9	18
20	.	10	20

Example 40.13: Selecting Date Case Series with the FAMEOUT= Option

This example shows how to extract date case series. In addition to the existing date case series in your Fame database, you can have formulas that resolve to date case series. SASEFAME resolves all formulas that belong to the class and type of series data object that you specify in your FAMEOUT= option. The following statements write all date case series to your SAS data set.

```
libname lib6 sasefame "%sysget(FAME_DATA)"
    fameout=datecase wildcard="?" ;

data cdout;
    set lib6.alltypes;
run;

title1 'Using FAMEOUT=DATECASE Option without Range';
title2 'ALLTYPES: FAMEOUT=DATECASE and Open Wildcard for Date Case Series';
proc contents
```

```

data=cdout;
run;

proc print
  data=cdout;
run;

```

Output 40.13.1 and Output 40.13.2 show the results.

Output 40.13.1 Contents of OUT=CDOUT Using FAMEOUT=DATECASE

Using FAMEOUT=DATECASE Option without Range					
ALLTYPES: FAMEOUT=DATECASE and Open Wildcard for Date Case Series					
The CONTENTS Procedure					
Alphabetic List of Variables and Attributes					
#	Variable	Type	Len	Format	Informat
1	DAT0	Num	8	YEAR4.	4.
2	DAT1	Num	8	YEAR4.	4.
3	DAT2	Num	8	YEAR4.	4.
4	DATM	Num	8	YEAR4.	4.
5	FRM2	Num	8	YEAR4.	4.

Output 40.13.2 Listing of OUT=CDOUT Using FAMEOUT=DATECASE

Using FAMEOUT=DATECASE Option without Range					
ALLTYPES: FAMEOUT=DATECASE and Open Wildcard for Date Case Series					
Obs	DAT0	DAT1	DAT2	DATM	FRM2
1	1991	1981	1987	1981	1987
2	1992	1982	1986	1982	1986
3	1993	1983	1985	1983	1985
4	1994	1984	1984	1984	1984
5	1995	1985	1983	1985	1983
6	1996	1986	.	1986	.
7	1997	1987	.	1987	.
8	1998	1988	.	1988	.
9	1999	.	1979	.	1979
10	2000
11	2001
12	2002
13	2003	.	1975	.	.
14	2004
15	2005
16	2006
17	2007	.	1971	.	.
18	2008
19	2009
20	2010

Example 40.14: Selecting String Case Series with the FAMEOUT= Option

This example shows how to extract string case series. In addition to the existing string case series in your Fame database, you can have formulas that resolve to string case series. SASEFAME resolves all formulas that belong to the class and type of series data object that you specify in your FAMEOUT= option. The following statements write all string case series to your SAS data set.

```
libname lib7 sasefame "%sysget(FAME_DATA) "
    fameout=stringcase wildcard="?" ;

data cstrout;
    set lib7.alltypes;
run;

title1 'Using FAMEOUT=STRINGCASE Option without Range';
title2 'ALLTYPES, FAMEOUT=STRINGCASE and Open Wildcard for String Case Series';
proc contents
    data=cstrout;
run;

proc print
    data=cstrout;
run;
```

Output 40.14.1 and Output 40.14.2 show the results.

Output 40.14.1 Contents of OUT=CSTROUT Using FAMEOUT=STRINGCASE and Open Wildcard for String Case Series

Using FAMEOUT=STRINGCASE Option without Range ALLTYPES, FAMEOUT=STRINGCASE and Open Wildcard for String Case Series			
The CONTENTS Procedure			
Alphabetic List of Variables and Attributes			
#	Variable	Type	Len
1	STR0	Char	16
2	STR1	Char	16
3	STR2	Char	16
4	STRM	Char	16

Output 40.14.2 Listing of OUT=CSTROUT Using FAMEOUT=STRINGCASE and Open Wildcard for String Case Series

Using FAMEOUT=STRINGCASE Option without Range ALLTYPES, FAMEOUT=STRINGCASE and Open Wildcard for String Case Series				
Obs	STR0	STR1	STR2	STRM
1	-9	0	1.333333	0
2	-8	1	1	1
3	-7	2	0.666667	2
4	-6	3	0.333333	3
5	-5	4	0	4
6	-4	5		5
7	-3	6		
8	-2	7		7
9	-1		-1.333333	
10	0			
11	1			
12	2			
13	3		-2.666667	
14	4			
15	5			
16	6			
17	7		-4	
18	8			
19	9			
20	10			

Example 40.15: Extracting Source for Formulas

This example shows how to extract the source for all the formulas in the Fame database by using the FAMEOUT=*formula* and the WILDCARD="?" options. The following statements show the source of all formulas written to your SAS data set. Another example of FAMEOUT=FORMULA option is shown in [Example 40.6](#).

```
libname lib8 sasefame "%sysget(FAME_DATA) "
    fameout=formula wildcard="?" ;

data cforout;
    set lib8.alltypes;
run;

title1 'Using FAMEOUT=FORMULA option without range';
proc contents
    data=cforout;
run;
```

Output 40.15.1 and Output 40.15.2 show the results.

Output 40.15.1 Contents of OUT=CFOROUT Using FAMEOUT=FORMULA and Open Wildcard

Using FAMEOUT=FORMULA option without range				
The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	
1	S.DFRM	Char	27	
2	S.FRM1	Char	27	
3	S.FRM2	Char	27	

```

title3 'ALLTYPES, FAMEOUT=FORMULA and open wildcard for FORMULA Series';
proc print
  data=cforout noobs;
run;

```

Output 40.15.2 Listing of OUT=CFOROUT Using FAMEOUT=FORMULA and Open Wildcard

Using FAMEOUT=FORMULA option without range				
ALLTYPES, FAMEOUT=FORMULA and open wildcard for FORMULA Series				
S.DFRM		S.FRM1		
IF DBOO THEN DPRC ELSE DNUM		IF BOO1 THEN NUM1 ELSE NUM2		
S.FRM2				
IF BOO0 THEN DAT1 ELSE DAT2				

If you want all series of every type, you can merge the resulting data sets together. For more information about merging SAS data sets, see *SAS Language Reference: Concepts*.

Example 40.16: Reading Time Series by Defining Fame Expression Groups in the INSET= Option with the KEEP= Clause

To keep all the numeric time series that are listed in the expressions given in the input data set, INSETA, use the INSET=(*setname* KEEPLIST=*fame_expression_group*) and the WILDCARD="?" options. The following statements show how to select time series that are specified in a KEEP expression group and are written to the SAS output data set.

```

data inseta; /* Use this for d8690 training data base */
  length express $52;
  express='cvx.close'; output;
  express='{ibm.high,ibm.low,ibm.close}'; output;
  express='mave(ibm.close,30)'; output;

```

```

    express='crosslist({gm,f,c},{volume});'; output;
    express='cvx.close+ibm.close;'; output;
    express='ibm.close;'; output;
    express='sum(pep.volume);'; output;
    express='mave(pep.close,20);'; output;
run;

title1 'TRAINING DB, Pricing Timeseries for Expressions in INSET=';
proc print
    data=inseta;
run;

```

Output 40.16.1 shows the expressions that are stored as observations in INSETA.

Output 40.16.1 Listing of INSETA Defining Fame Expression Group

TRAINING DB, Pricing Timeseries for Expressions in INSET=	
Obs	express
1	cvx.close;
2	{ibm.high,ibm.low,ibm.close};
3	mave(ibm.close,30);
4	crosslist({gm,f,c},{volume});
5	cvx.close+ibm.close;
6	ibm.close;
7	sum(pep.volume);
8	mave(pep.close,20);

The following statements show how to use the INSET= option to keep all of the time series that are represented in INSETA as the group variable named express.

```

libname libX sasefame "%sysget(FAME_DATA)"
    wildcard="?"
    convert=(frequency=business technique=constant)
    range='23jul1997'd - '25jul1997'd
    inset=( inseta KEEP=express)
;

data trout;
    set libX.trainten;
run;

title1 'TRAINING DB, Pricing Timeseries for Expressions in INSET=';
proc print data=trout;
run;

proc contents data=trout;
run;

```

Output 40.16.2 and Output 40.16.3 show the results.

Output 40.16.2 Listing of TROUT using INSETA with KEEP=express

TRAINING DB, Pricing Timeseries for Expressions in INSET=						
Obs	DATE	C.VOLUME	VOLUME	GM.VOLUME	IBM.CLOSE	IBM.HIGH
1	23JUL1997	33791.88	45864.05	37392	52.5625	53.5000
2	24JUL1997	41828.85	29651.34	27771	53.9063	54.2188
3	25JUL1997	46979.83	36716.77	24969	53.5000	54.2188
Obs	IBM.LOW	SASTEMP1	SASTEMP3	SASTEMP5	SASTEMP6	SASTEMP8
1	51.5938	76.8125	47.0894	129.375	52.5625	37.6118
2	52.2500	76.8750	47.4289	130.781	53.9063	37.6250
3	52.8125	78.0000	47.7392	131.500	53.5000	37.6546

Output 40.16.3 Listing of Contents of TROUT

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
2	C.VOLUME	Num	8			
1	DATE	Num	8	DATE9.	9.	Date of Observation
4	GM.VOLUME	Num	8			
5	IBM.CLOSE	Num	8			
6	IBM.HIGH	Num	8			
7	IBM.LOW	Num	8			
8	SASTEMP1	Num	8			
9	SASTEMP3	Num	8			
10	SASTEMP5	Num	8			
11	SASTEMP6	Num	8			
12	SASTEMP8	Num	8			
3	VOLUME	Num	8			

Example 40.17: Optimizing Cache Sizes with the TUNEFAME= and TUNECHLI= Options

The following statements show how to use the TUNEFAME= option, the TUNECHLI= option, and a RANGE= option for selecting pricing time series in the TRAJTEN database. The selected time series are written to the SAS output data set. The Fame database engine's virtual memory is given in megabytes (MB), so this example sets the cache size to 100 MB. The Fame CHLI engine's virtual memory is also given in megabytes (MB), so this example sets the CHLI cache size to 100 MB. These two settings correspond to the default settings. Both the Fame 4GL engine and the Fame CHLI engine can use a cache size ranging from 0.1 MB to 17,592,186,000 MB.

```
libname lib5 sasefame "%sysget(FAME_DATA) "
wildcard="?UHIGH"
```

```

tunefame=nodes 100
tunechli=nodes 100
convert=(frequency=business technique=constant)
range='23jul1997'd - '25jul1997'd
;

data trout(drop=C:);
  set lib5.trainten;
run;
title1 'TRAINTEN DB, Pricing Timeseries, TUNEFAME=NODES and TUNECHLI=NODES Options';
proc print data=trout;
run;

proc contents data=trout;
run;

```

Output 40.17.1 and Output 40.17.2 show the results.

Output 40.17.1 Listing of TRAINING DB, Pricing Timeseries, TUNEFAME=NODES, and TUNECHLI=NODES Options

TRAINTEN DB, Pricing Timeseries, TUNEFAME=NODES and TUNECHLI=NODES Options									
		DJ30IN.	DJ__30.		F__I.		GM_PP.	HPQ.	HWP.
Obs	DATE	UHIGH	UHIGH	F.UHIGH	UHIGH	GM.UHIGH	UHIGH	UHIGH	UHIGH
1	23JUL1997	8199.15	8199.15	41.0625	41.0625	59.1250	59.1250	67.3125	67.3125
2	24JUL1997	8174.53	8174.53	42.0000	42.0000	59.2500	59.2500	65.8750	65.8750
3	25JUL1997	8200.31	8200.31	41.5000	41.5000	57.8125	57.8125	66.1250	66.1250
		IBM.	INDUT.	INTC.	JAVA.	JAVAD.	PEP.	SPAL.	SPALN.
Obs	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH	KO.UHIGH	UHIGH	UHIGH	UHIGH
1	107.000	8199.15	90.750	46.9375	46.9375	70.7500	38.4375	941.800	941.800
2	108.438	8174.53	90.625	46.8750	46.8750	70.4375	38.0625	941.510	941.510
3	108.438	8200.31	91.125	47.3750	47.3750	70.9375	38.7500	945.650	945.650
		SPALNS.	SPX.	SP_CI.	SP__50.	SP__C.	SUNW.	XOM.	XON.
Obs	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH	UHIGH
1	941.800	941.800	941.800	941.800	941.800	46.9375	63.125	63.125	
2	941.510	941.510	941.510	941.510	941.510	46.8750	62.000	62.000	
3	945.650	945.650	945.650	945.650	945.650	47.3750	63.000	63.000	

Output 40.17.2 Listing of Contents of TROUT for TUNEFAME=NODES and TUNECHLI=NODES Options

Alphabetic List of Variables and Attributes						
#	Variable	Type	Len	Format	Informat	Label
1	DATE	Num	8	DATE9.	9.	Date of Observation
2	DJ30IN.UHIGH	Num	8			
3	DJ__30.UHIGH	Num	8			
4	F.UHIGH	Num	8			
5	F__I.UHIGH	Num	8			
6	GM.UHIGH	Num	8			
7	GM__PP.UHIGH	Num	8			
8	HPQ.UHIGH	Num	8			
9	HWP.UHIGH	Num	8			
10	IBM.UHIGH	Num	8			
11	INDUT.UHIGH	Num	8			
12	INTC.UHIGH	Num	8			
13	JAVA.UHIGH	Num	8			
14	JAVAD.UHIGH	Num	8			
15	KO.UHIGH	Num	8			
16	PEP.UHIGH	Num	8			
17	SPAL.UHIGH	Num	8			
18	SPALN.UHIGH	Num	8			
19	SPALNS.UHIGH	Num	8			
20	SPX.UHIGH	Num	8			
21	SP_CI.UHIGH	Num	8			
22	SP__50.UHIGH	Num	8			
23	SP__C.UHIGH	Num	8			
24	SUNW.UHIGH	Num	8			
25	XOM.UHIGH	Num	8			
26	XON.UHIGH	Num	8			

For more information about tuning the use of virtual memory, read about TUNE CACHE NODES in the section “TUNE CACHE Option” in the online document *Fame 10 Online Help*.

References

DRI/McGraw-Hill (1997), *DataLink*, Lexington, MA.

DRI/McGraw-Hill Data Search and Retrieval for Windows (1996), *DRIPRO User's Guide*, Lexington, MA.

IHS Global Insight (2009), Lexington, MA. [<http://www.globalinsight.com/EconomicFinancialData>].

SunGard Solutions for Data Management (2009), *FAME 10 Online Help*, Ann Arbor, MI [<http://www.fame.sungard.com/support.html>].

SunGard Solutions for Data Management (2009), *Guide to Fame Database Servers*, 888 Seventh Avenue, 12th Floor, New York, NY 10106 USA [<http://www.fame.sungard.com/support.html>].

SunGard Solutions for Data Management (2009), *User's Guide to Fame*, Ann Arbor, MI [<http://www.fame.sungard.com/support.html>].

SunGard Solutions for Data Management (2009), *Reference Guide to Seamless C HLI*, Ann Arbor, MI [<http://www.fame.sungard.com/support.html>].

SunGard Solutions for Data Management (2009), *FAME Command Reference for Release 9 and earlier*, Ann Arbor, MI [<http://www.fame.sungard.com/support.html>].

SunGard Solutions for Data Management (2009), *FAME Functions for FAME Release 9 and earlier*, Ann Arbor, MI [<http://www.fame.sungard.com/support.html>].

Organisation For Economic Cooperation and Development (1992), *Annual National Accounts: Volume I. Main Aggregates Content Documentation*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Annual National Accounts: Volume II. Detailed Tables Technical Documentation*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Main Economic Indicators Database Note*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Main Economic Indicators Inventory*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Main Economic Indicators OECD Statistics*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *OECD Statistical Information Research and Inquiry System*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Quarterly National Accounts Inventory of Series Codes*, Paris, France.

Organisation For Economic Cooperation and Development (1992), *Quarterly National Accounts Technical Documentation*, Paris, France.

Chapter 41

The SASEHAVR Interface Engine

Contents

Overview: SASEHAVR Interface Engine	2770
Getting Started: SASEHAVR Interface Engine	2770
Structure of a SAS Data Set That Contains Time Series Data	2770
Reading and Converting Haver DLX Time Series	2770
Using the SAS DATA Step	2771
Using the SAS Windowing Environment	2771
Syntax: SASEHAVR Interface Engine	2772
LIBNAME <i>libref</i> SASEHAVR Statement	2773
Details: SASEHAVR Interface Engine	2777
SAS Output Data Set	2777
Mapping Haver Frequencies to SAS Time Intervals	2777
Error Recovery for SASEHAVR	2778
Data Elements Reference: Haver Analytics DLX Database Profile	2782
Examples: SASEHAVR Interface Engine	2789
Example 41.1: Examining the Contents of a Haver Database	2789
Example 41.2: Viewing Quarterly Time Series from a Haver Database	2791
Example 41.3: Viewing Monthly Time Series from a Haver Database	2792
Example 41.4: Viewing Weekly Time Series from a Haver Database	2793
Example 41.5: Viewing Daily Time Series from a Haver Database	2794
Example 41.6: Limiting the Range of Time Series from a Haver Database	2795
Example 41.7: Using the WHERE Statement to Subset Time Series from a Haver Database	2796
Example 41.8: Using the KEEP Option to Subset Time Series from a Haver Database	2798
Example 41.9: Using the SOURCE Option to Subset Time Series from a Haver Database	2800
Example 41.10: Using the GROUP Option to Subset Time Series from a Haver Database	2802
Example 41.11: Using the OUTSELECT=ON Option to View the Key Selection Vari- ables in a Haver Database	2808
Example 41.12: Selecting Variables Based on Short Source Key Code	2810
Example 41.13: Selecting Variables Based on Geography Key Codes	2812
References	2817

Overview: SASEHAVR Interface Engine

The SASEHAVR interface engine is a seamless interface between Haver and SAS data processing that enables SAS users to read economic and financial time series data that reside in a Haver Analytics DLX (Data Link Express) database. The Haver Analytics DLX economic and financial database offerings include U.S. economic indicators, specialized databases, financial indicators, industry, industrial countries, emerging markets, international organizations, forecasts and as-reported data, and U.S. regional service. For more details, see “[Data Elements Reference: Haver Analytics DLX Database Profile](#)” on page 2782.

The SASEHAVR engine uses the LIBNAME statement to enable you to specify how you want to subset your Haver data and how you want to aggregate the selected time series to the same frequency. You can then use the SAS DATA step to perform further subsetting and to store the resulting time series in a SAS data set. You can perform more analysis (if desired) either in the same SAS session or in another session at a later time.

SASEHAVR for SAS 9.3 supports both 32-bit and 64-bit Windows hosts.

Getting Started: SASEHAVR Interface Engine

Structure of a SAS Data Set That Contains Time Series Data

SAS represents time series data in a two-dimensional array called a SAS data set whose columns correspond to series variables and whose rows correspond to measurements of these variables at certain time periods. The time periods at which observations are recorded can be included in the data set as a time ID variable. The SASEHAVR engine provides a time ID variable called DATE. The DATE variable can be represented in any of the time intervals shown in the section “[Mapping Haver Frequencies to SAS Time Intervals](#)” on page 2777.

Reading and Converting Haver DLX Time Series

The SASEHAVR engine supports reading and converting all selected time series that reside in Haver DLX databases. The SASEHAVR engine enables you to limit the range of data with the START= and END= options in the LIBNAME statement. Start dates and end dates are recommended to help save resources when processing large databases or when processing a large number of observations.

The SASEHAVR engine enables you to convert or aggregate all selected time series to a desired frequency. By default, SASEHAVR selects the time series variables that match the frequency of the first selected variable. To select variables of one specific frequency, use the FREQ= option. If no selection criteria are specified, the first selected variable is the first physical DLX record read from the Haver database. To force

aggregation of all selected variables to the frequency specified by the FREQ= option, use the FORCE=FREQ option. The AGGMODE= option enables you to specify a STRICT or RELAXED aggregation method. AGGMODE=RELAXED is the default setting. Aggregation is supported only from a more frequent time interval to a less frequent time interval, such as from weekly to monthly. If a conversion to a more frequent frequency is attempted, all missing values are returned by the Haver DLX API (application programming interface). See the section “[Aggregating to Quarterly Frequency Using the FORCE=FREQ Option](#)” on page 2781. The FORCE= option is ignored if the FREQ= option is not specified.

Using the SAS DATA Step

If desired, you can store your selected time series in a SAS data set by using the SAS DATA step. You can further subset your data by using the WHERE, KEEP, or DROP statements in your DATA step.

For more efficient subsetting of time series by Haver variables, by Haver groups, by Haver sources, by Haver short sources, by Haver long sources, or by Haver geographic codes, you can use the corresponding KEEP=, GROUP=, SOURCE=, SHORTSOURCE=, LONGSOURCE=, GEOGCODE1=, or GEOGCODE2= option in the LIBNAME *libref* SASEHAVR statement. To see the available Haver selection key values including geographic codes, short sources, and long sources for your database, use the OUTSELECT=ON option. From the OUTSELECT output, you can use convenient wildcard symbols to create the selection list for your next LIBNAME *libref* SASEHAVR statement.

There are three wildcard symbols: ‘*’, ‘?’ and ‘#’. The ‘*’ wildcard corresponds to any character string and includes any string pattern that corresponds to that position in the matching variable name. The ‘?’ stands for any single alphanumeric character. Lastly, the ‘#’ wildcard corresponds to a single numeric character.

You can also deselect time series by Haver variables, by Haver groups, by Haver sources, by Haver short sources, by Haver long sources, or by Haver geographic codes, by using the corresponding DROP=, DROPGROUP=, DROPSOURCE=, DROPSHORT=, DROPLONG=, DROPGEOG1=, or DROPGEOG2= option. These options also support wildcards.

After your selected data is stored in a SAS data set, you can use it as you would any other SAS data set.

Using the SAS Windowing Environment

You can see the available data sets in the SAS LIBNAME window of the SAS windowing environment by selecting the SASEHAVR *libref* in the LIBNAME window that you have previously defined in your LIBNAME statement. You can view your SAS output observations by double-clicking on the desired output data set *libref* in the LIBNAME window of the SAS windowing environment. You can type **Viewtable** on the SAS command line to view your SASEHAVR tables, views, or librefs.

Before you use **Viewtable**, it is recommended that you store your output data sets in a physical folder or library that is separate from the folder or library used for your input databases. (The default location for output data sets is the SAS Work library.) If you do not follow this guideline, you will receive the following error message for each input database that does not have the selected options in the SASEHAVR *libref* that you double-clicked:

ERROR: No variable selected with current options.

Syntax: SASEHAVR Interface Engine

The SASEHAVR engine uses standard engine syntax. Table 41.1 summarizes the options used in the LIBNAME *libref* SASEHAVR statement.

Table 41.1 Summary of LIBNAME *libref* SASEHAVR Statement Options

Option	Description
FREQUENCY=	Specifies the Haver frequency
START=	Specifies a Haver start date to limit the selection of time series to those that begin with the specified date
END=	Specifies a Haver end date to limit the selection of time series to those that end with the specified date
KEEP=	Specifies a list of comma-delimited Haver variables to keep in the output SAS data set
DROP=	Specifies a list of comma-delimited Haver variables to drop from the output SAS data set
GROUP=	Specifies a list of comma-delimited Haver groups to keep in the output SAS data set
DROPGROUP=	Specifies a list of comma-delimited Haver groups to drop from the output SAS data set
SOURCE=	Specifies a list of comma-delimited Haver sources to keep in the output SAS data set
DROPSOURCE=	Specifies a list of comma-delimited Haver sources to drop from the output SAS data set
SHORT=	Specifies a list of comma-delimited Haver short sources to keep in the output SAS data set
DROPSHORT=	Specifies a list of comma-delimited Haver short sources to drop from the output SAS data set
LONG=	Specifies a list of comma-delimited Haver long sources to keep in the output SAS data set
DROPLONG=	Specifies a list of comma-delimited Haver long sources to drop from the output SAS data set
GEOG1=	Specifies a list of comma-delimited Haver geography1 codes to keep in the output SAS data set
DROPGEOG1=	Specifies a list of comma-delimited Haver geography1 codes to drop from the output SAS data set
GEOG2=	Specifies a list of comma-delimited Haver geography2 codes to keep in the output SAS data set
DROPGEOG2=	Specifies a list of comma-delimited Haver geography2 codes to drop from the output SAS data set
OUTSELECT=	Specifies what values the output data is to contain

Table 41.1 *continued*

Option	Description
FORCE=FREQ	Specifies that all selected time series variables be aggregated to the frequency specified in the FREQ= option
AGGMODE=	Specifies the aggregation method used for aggregating time series (STRICT or RELAXED)

LIBNAME libref SASEHAVR Statement

LIBNAME libref sasehavr *‘physical name’ options* ;

The *‘physical name’* specifies the location of the folder where your Haver DLX database resides.

You can use the following options in the LIBNAME libref SASEHAVR statement:

FREQ=*haver_frequency*

FREQUENCY=*haver_frequency*

INTERVAL=*haver_frequency*

specifies the Haver frequency. All Haver frequencies are supported by the SASEHAVR engine. Accepted frequency values are annual, year, yearly, quarter, quarterly, qtr, monthly, month, mon, week.1, week.2, week.3, week.4, week.5, week.6, week.7, weekly, week, daily, and day.

START=*start_date*

STARTDATE=*start_date*

STDATE=*start_date*

BEGIN=*start_date*

specifies the start date for the time series in the form YYYYMMDD.

END=*end_date*

ENDDATE=*end_date*

ENDATE=*end_date*

specifies the end date for the time series in the form YYYYMMDD.

KEEP=*“haver_variable_list”*

specifies the list of Haver variables to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes “”.

DROP=*“haver_variable_list”*

specifies the list of Haver variables to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes “”.

GROUP=*“haver_group_list”*

KEEPGROUP=*“haver_group_list”*

specifies the list of Haver groups to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes “”.

DROPGROUP=*“haver_group_list”*

specifies the list of Haver groups to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

SOURCE=*“haver_source_list”***KEEPSOURCE=***“haver_source_list”*

specifies the list of Haver sources to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

DROPSOURCE=*“haver_source_list”*

specifies the list of Haver sources to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

SHORT=*“haver_shortsource_list”***KEEPSHORT=***“haver_shortsource_list”***SHORTSOURCE=***“haver_shortsource_list”*

specifies the list of Haver short sources to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

DROPSHORT=*“haver_shortsource_list”***DROPSHORTSOURCE=***“haver_shortsource_list”*

specifies the list of Haver short sources to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

LONG=*“haver_longsource_list”***KEEPLONG=***“haver_longsource_list”***LONGSOURCE=***“haver_longsource_list”*

specifies the list of Haver long sources to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

DROPLONG=*“haver_longsource_list”***DROPLONGSOURCE=***“haver_longsource_list”*

specifies the list of Haver long sources to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

GEOG1=*“haver_geographycode1_list”***KEEPGEOG1=***“haver_geographycode1_list”***GEOGCODE1=***“haver_geographycode1_list”*

specifies the list of Haver geography1 codes to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

DROPGEOG1=*“haver_geographycode1_list”***DROPGEOGCODE1=***“haver_geographycode1_list”*

specifies the list of Haver geography1 codes to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes *“”*.

GEOG2=*“haver_geographycode2_list”***KEEPGEOG2=***“haver_geographycode2_list”*

GEOGCODE2=*“haver_geographycode2_list”*

specifies the list of Haver geography2 codes to be included in the output SAS data set. This list is comma-delimited and must be surrounded by quotes “”.

DROPGEOG2=*“haver_geographycode2_list”***DROPGEOGCODE2=***“haver_geographycode2_list”*

specifies the list of Haver geography2 codes to be excluded from the output SAS data set. This list is comma-delimited and must be surrounded by quotes “”.

OUTSELECT=ON | OFF

specifies what the output data set shows. OUTSELECT=ON specifies that the output data set show values of selection keys (such as geography codes, groups, sources, short sources, and long sources) for each selected variable name (time series) in the database. OUTSELECT=OFF specifies that the output data set show the observations in the range for all selected time series. The default is OUTSELECT=OFF.

AGGMODE=STRICT | RELAXED

specifies whether the SASEHAVR engine uses a strict or relaxed aggregation method when converting time series from a higher to lower frequency.

A strict aggregation method returns a missing value whenever there is a missing observation in a time period. For instance, if a monthly time series has a missing value for the month of February, 2005, then attempting to aggregate to a quarterly frequency results in a missing value for the first quarter of 2005. The SAS log reports the status of this option.

When a relaxed aggregation method is used, some observations can be missing, but the relaxed method returns an aggregated value calculated from the nonmissing data points according to the series aggregation type (average, sum, or end of period). Average type only needs one valid (nonmissing) data point to calculate the average. Sum type needs all the data points to be available in order to sum the values. End of period type calculates the end of period value if there is at least one valid (nonmissing) data point in the aggregated span. It returns the last available valid data point in the aggregated span. The default is AGGMODE=RELAXED.

FORCE=FREQ

specifies that the selected variables be aggregated to the frequency in the FREQ= option. Aggregation is supported only from a more frequent time interval to a less frequent time interval, such as from weekly to monthly. See the section [“Aggregating to Quarterly Frequency Using the FORCE=FREQ Option”](#) on page 2781 for sample output and suggested error recovery from attempting a conversion that yields missing values when a higher frequency conversion is specified. This option is ignored if the FREQ= option is not set. For a more complete discussion of Haver frequencies and SAS time intervals, see the section [“Mapping Haver Frequencies to SAS Time Intervals”](#) on page 2777.

Following is an example of the LIBNAME *libref* SASEHAVR statement:

```
LIBNAME libref sasehavr 'physical-name'
      FREQ=MONTHLY;
```

By default, the SASEHAVR engine reads all time series in the Haver database that you reference by *libref*. The *start_date* is specified in the form YYYYMMDD. The start date is used to delimit the data to a specified start date.

For example, to read the time series in the TEST library starting on July 4, 1996, specify the following statement:

```
LIBNAME test sasehavr 'physical-name'
      STARTDATE=19960704;
```

When you use the START= option, you limit the range of observations that are read from the time series and that are converted to the desired frequency. Start dates can help save resources when processing large databases or when processing a large number of observations. It is also possible to select specific variables to be included or excluded from the SAS data set by using the KEEP= or the DROP= option, respectively.

```
LIBNAME test sasehavr 'physical-name'
      KEEP="ABC*, XYZ??";
```

```
LIBNAME test sasehavr 'physical-name'
      DROP="*SC*, #T#";
```

When the KEEP= or the DROP= option is used, the resulting SAS data set keeps or drops the variables that you select in that option. Three wildcards are available: '*', '?' and '#'. The '*' wildcard corresponds to any character string and includes any string pattern that corresponds to that position in the matching variable name. The '?' means that any single alphanumeric character is valid. The '#' wildcard corresponds to a single numeric character. You can also select time series in your data by using the GROUP=, SOURCE=, SHORT=, LONG=, GEOG1=, or the GEOG2= option to select on group name, source name, short source name, long source name, geography1 code, or the geography2 code, respectively. Alternatively, you can de-select time series by using the DROPGROUP=, DROPSOURCE=, DROPSHORT=, DROPLONG=, DROPGEOG1=, or the DROPGEOG2= option, respectively.

Following are examples that perform variable selection (or deselection) based on groups or sources:

```
LIBNAME test sasehavr 'physical-name'
      GROUP="CBA, *ZYX";
```

```
LIBNAME test sasehavr 'physical-name'
      DROPGROUP="TKN*, XCZ?";
```

```
LIBNAME test sasehavr 'physical-name'
      SOURCE="FRB";
```

```
LIBNAME test sasehavr 'physical-name'
      DROPSOURCE="NYSE";
```

SASEHAVR selects only the variables that are of the specified frequency in the FREQ= option. If this option is not specified, SASEHAVR selects the variables that match the frequency of the first selected variable. If no other selection criteria are specified, by default the first selected variable is the first physical DLX record read from the Haver database. You can specify the FORCE=FREQ option to force the aggregation

of all variables selected to be of the frequency specified in the `FREQ=` option. Aggregation is supported only from a more frequent time interval to a less frequent time interval, such as from weekly to monthly. See the section “[Aggregating to Quarterly Frequency Using the `FORCE=FREQ` Option](#)” on page 2781 for suggested recovery from using a frequency that does not aggregate the data appropriately. The `FORCE=` option is ignored if the `FREQ=` option is not specified. The `AGGMODE= STRICT` option is used when a strict aggregation method is desired. The default value for `AGGMODE` is `RELAXED`, the same method that was used in prior releases of SASEHAVR.

Details: SASEHAVR Interface Engine

SAS Output Data Set

You can use the SAS `DATA` step to write the Haver converted series to a SAS data set so that you can easily analyze the data using the SAS System. You can specify the name of the output data set in the `DATA` statement. This causes the engine supervisor to create a SAS data set with the specified name in either the SAS Work library, or if specified, the `Sasuser` library.

When `OUTSELECT=OFF` (the default), the contents of the SAS data set include the date of each observation, the name of each series read from the Haver database, and the label or Haver description of each series. Missing values are represented as ‘.’ in the SAS data set. You can use the `PRINT` procedure and the `CONTENTS` procedure to print your output data set and its contents. You can use the `SQL` procedure along with the SASEHAVR engine to create a view of your SAS data set.

The `DATE` variable in the SAS data set contains the date of the observation. The SASEHAVR engine automatically maps the Haver intervals to the appropriate corresponding SAS intervals.

When `OUTSELECT=ON`, the `OUT=` data set does not contain the observations of all time series. Instead, each observation contains the name of the time series, the source of the time series, the geography1 code, the geography2 code, the short source, and the long source for that time series. In addition, the contents of the `OUT=` data set shows every selected time series name and label. See [Output 41.11.1](#) and [Output 41.11.2](#) for more details about the `OUTSELECT=ON` option.

A more detailed discussion of how to map Haver frequencies to SAS time intervals follows.

Mapping Haver Frequencies to SAS Time Intervals

Table 41.2 summarizes the mapping of Haver frequencies to SAS time intervals. For more information, see Chapter 4, “[Date Intervals, Formats, and Functions](#).”

Table 41.2 Mapping Haver Frequencies to SAS Time Intervals

Haver Frequency	SAS Time Interval	FREQ=
ANNUAL	YEAR	YEARLY
QUARTERLY	QTR	QTRLY
MONTHLY	MONTH	MON
WEEKLY (SUNDAY)	WEEK.1	WEEK.1
WEEKLY (MONDAY)	WEEK.2	WEEK.2
WEEKLY (TUESDAY)	WEEK.3	WEEK.3
WEEKLY (WEDNESDAY)	WEEK.4	WEEK.4
WEEKLY (THURSDAY)	WEEK.5	WEEK.5
WEEKLY (FRIDAY)	WEEK.6	WEEK.6
WEEKLY (SATURDAY)	WEEK.7	WEEK.7
WEEKLY WEEK.1-WEEK.7	WEEKLY	WEEKLY
DAILY	WEEKDAY17W	DAY

Error Recovery for SASEHAVR

Common errors are easy to avoid by noting the valid dates that are specified in the warning messages in your SAS log. Often you can get rid of errors by removing the date restriction (START= and END= options), by removing the FORCE=FREQ option, or by deleting the FREQ= option so that the frequency defaults to the original frequency rather than attempting a conversion.

Following are some common error scenarios and how to handle them.

Using the Optimum Range for Best Output Results

Suppose you see the following warnings in your SAS log:

```
libname kgs2 sasehavr "%sysget(HAVER_DATA)"
      start= 19550101 end=19600105
      keep="FCSEED, FCSEEI, FCSEEM, BGSX, BGSM, FXDUSBC"
      group="I01, F56, M02, R30"
      source="JPM,CEN,OMB" ;
```

NOTE: Libref KGS2 was successfully assigned as follows:

```
Engine:          SASEHAVR
Physical Name: C:\haver
```

```
data kgse9;
```

```
  set kgs2.haver;
```

NOTE: Defaulting to MONTHLY frequency.

WARNING: Start date (19550101) is not a valid date.

Engine is ignoring your start date and using

default. Setting the default Haver start date to 7001.

WARNING: End date (19600105) is not a valid date.

```

Engine is ignoring your end date and using
default. Setting the default Haver end date to 10103.
run;

```

NOTE: There were 375 observations read from the data set KGS2.HAVER.

NOTE: The data set WORK.KGSE9 has 375 observations and 4 variables.

The important diagnostic to note here is the warning message that tells you that the data starts in January of 1970 (Haver date 7001), and ends in March, 2001 (Haver date 10103). Since the specified range falls outside the range of data, no observations are in range. So, the engine uses the default range stated in the warning messages. Change the START= and END= options to overlap the results in data that span from JAN1970 to MAR2001. To view the entire range of selected data, remove the START= and END= options from the LIBNAME statement:

```

libname kgs sasehavr "%sysget(HAVER_DATA)"
    keep="FCSEED, FCSEEI, FCSEEM, BGSX, BGSM, FXDUSBC"
    group="I01, F56, M02, R30"
    source="JPM,CEN,OMB" ;

```

NOTE: Libref KGS was successfully assigned as follows:

Engine: SASEHAVR

Physical Name: C:\haver

```

data kgse5;
    set kgs.haver;
NOTE: Defaulting to MONTHLY frequency.
run;

```

NOTE: There were 375 observations read from the data set KGS.HAVER.

NOTE: The data set WORK.KGSE5 has 375 observations and 4 variables.

Using a Valid Range of Data with START= and END= Options

In this example, an error about an invalid range is issued:

```

libname lib1 sasehavr "%sysget(HAVER_DATA)" freq=Weekly
    start=20060301 end=20060531;
NOTE: Libref LIB1 was successfully assigned as follows:
    Engine: SASEHAVR
    Physical Name: C:\haver
libname lib2 "\\dntsrc\usrtmp\saskff" ;
NOTE: Libref LIB2 was successfully assigned as follows:
    Engine: V9
    Physical Name: \\dntsrc\usrtmp\saskff
data lib2.wweek;
    set lib1.intwkly;
ERROR: No observations found inside RANGE.
    The valid range for HAVER dates is (610104-1050318).
ERROR: No observations found in specified range.
    keep date m11: ;

```

```
run;
```

```
WARNING: The variable date in the DROP, KEEP, or RENAME list
has never been referenced.
WARNING: The variable m11: in the DROP, KEEP, or RENAME list
has never been referenced.
NOTE: The SAS System stopped processing this step because of errors.
WARNING: The data set LIB2.WWEEK may be incomplete.
When this step was stopped there were 0
observations and 0 variables.
WARNING: Data set LIB2.WWEEK was not replaced because this step was stopped.
```

The important diagnostic message is the first error statement which tells you that the range of Haver dates is not valid for the specified frequency. A valid range is one that overlaps the dates (610104–1050318). Removing the range altogether causes the engine to output the entire range of data.

```
libname lib1 sasehavr "%sysget(HAVER_DATA)" freq=Weekly;
```

```
NOTE: Libref LIB1 was successfully assigned as follows:
Engine:          SASEHAVR
Physical Name: C:\haver
```

```
libname lib2 "\\dntsrc\usrtmp\saskff" ;
```

```
NOTE: Libref LIB2 was successfully assigned as follows:
Engine:          V9
Physical Name: \\dntsrc\usrtmp\saskff
```

```
data lib2.wweek;
  set lib1.intwkly;
  keep date m11: ;
run;
```

```
NOTE: There were 2307 observations read from the data set LIB1.INTWKLY.
NOTE: The data set LIB2.WWEEK has 2307 observations and 35 variables.
```

Since the START= and END= options give day-based dates, it is important to use dates that correspond to the FREQ= option when giving a range of dates, especially with weekly frequencies such as WEEK.1–WEEK.7. Since FREQ=WEEK.4 selects weeks that begin on Wednesday, the start and end dates need to be specified as Wednesday dates.

```
libname lib1 sasehavr "%sysget(HAVER_DATA)" freq=Week.4
start=20050302 end=20050309;
```

```
NOTE: Libref LIB1 was successfully assigned as follows:
Engine:          SASEHAVR
Physical Name: \\tappan\crsp1\haver
```

```
title2 'Weekly dataset with freq=week.4 range is small';
```

```
libname lib2 "\\dntsrc\usrtmp\saskff" ;
```

```
NOTE: Libref LIB2 was successfully assigned as follows:
Engine:          V9
Physical Name: \\dntsrc\usrtmp\saskff
```

```
data lib2.wweek;
    set lib1.intwkly;
    keep date m11: ;
run;
```

NOTE: There were 2 observations read from the data set LIB1.INTWKLY.

NOTE: The data set LIB2.WWEEK has 2 observations and 25 variables.

Giving bad dates (for example, Tuesday dates) for a Wednesday `FREQ=WEEK.4` results in the following error:

```
ERROR: Fatal error in GetDate routine.
        Remove the range statement or change the START= date to
        be consistent with the freq=option.
ERROR: No observations found in specified range.
```

Aggregating to Quarterly Frequency Using the `FORCE=FREQ` Option

In the next example, six time series are selected by the `KEEP=` option. Their frequencies are annual, monthly, and quarterly, so when the `FREQ=WEEKLY` and `FORCE=FREQ` options are used, a diagnostic appears in the log stating that the engine is forcing the frequency to `QUARTERLY` for better date alignment of observations. The first selected variable is `BALO`, which is a quarterly time series and causes the default choice of `FREQ` to be quarterly.

```
title1 '***HAVKWC.SAS: KEEP= option tests with wildcards***';

%setup( ets );

/*-----*/
/* Wildcard: * */
/*-----*/

title2 "keep=B*, G*, I*";
title3 "6 valid variables are: BALO BGSM BGSX BPBCA G IUM";
libname lib1 sasehavr 'C:\haver\' keep="B*, G*, I*"
    freq=weekly force=freq;
NOTE: Libref LIB1 was successfully assigned as follows:
      Engine:          SASEHAVR
      Physical Name: C:\haver\

data wc;
    set lib1.haver;
WARNING: Earliest Start Date in DLX Database matches QUARTERLY frequency
        better than the specified WEEKLY frequency.
        Engine is forcing the frequency to QUARTERLY for better date
        alignment of observations.

run;

NOTE: There were 221 observations read from the data set LIB1.HAVER.
NOTE: The data set WORK.WC has 221 observations and 7 variables.
```

Note that the time series IUM is an annual frequency. The attempt to convert to a quarterly frequency produces all missing values in the output range because aggregation produces only missing values when forced to go from a lower frequency to a higher frequency.

Data Elements Reference: Haver Analytics DLX Database Profile

The Haver DLX economic and financial database offerings include U.S. economic indicators, specialized databases, financial indicators, industry, industrial countries, emerging markets, international organizations, forecasts and as-reported data, and U.S. regional service. Table 41.3 is a list of available databases and the corresponding description of each.

Table 41.3 Available Data Offerings

Database Name	Offering Type	Description
USECON	U.S. economic indicators	U.S. economic, financial data
USNA	U.S. economic indicators	Complete U.S. NIPA accounts from the Bureau of Economic Analysis (BEA)
SURVEYS	U.S. economic indicators	Business and consumer expectations, surveys
SURVEYW	U.S. economic indicators	Business and consumer expectations, weekly surveys
CPIDATA	U.S. economic indicators	Consumer price indexes (CPI), monthly in CPI detailed report
PPI	U.S. economic indicators	Producer price indexes (PPI), by the Bureau of Labor Statistics (BLS)
PPIR	U.S. economic indicators	Producer price indexes by BLS
LABOR	U.S. economic indicators	Employment and earnings by BLS
EMPL	U.S. economic indicators	Household employment survey, monthly by BLS
CEW	U.S. economic indicators	Covered employment and wages, monthly, quarterly
IP	U.S. economic indicators	Industrial production and capacity utilization by Federal Reserve Board (FRB)
FFUNDS	U.S. economic indicators	Flow of funds data by FRB
CAPSTOCK	U.S. economic indicators	Capital stock by the Bureau of Economic Analysis (BEA)
USINT	U.S. economic indicators	U.S. international trade (TIC) data by country and product
CBDB	Specialized databases	Conference Board database, monthly by The Conference Board (TCB)

Table 41.3 *continued*

Database Name	Offering Type		Description
BCI	Specialized databases		U.S. business cycle indicators, by TCB
UMSCA	Specialized databases		Consumer Sentiment Survey from the University of Michigan
FIBERUS	Specialized databases		U.S. FIBER business cycle indicators from the Foundation of International Business and Economic Research (FIBER)
FIBER	Specialized databases		FIBER business cycle indicators from FIBER
DAILY	Financial indicators	indicators	U.S. daily statistics data
INTDAILY	Financial indicators	indicators	Country daily statistics
WEEKLY	Financial indicators	indicators	U.S. weekly statistics
INTWKLY	Financial indicators	indicators	Country weekly statistics
SPD	Financial indicators	indicators	Standard and Poor's industry groups, daily
SPW	Financial indicators	indicators	Standard and Poor's industry groups, weekly
SPM	Financial indicators	indicators	Standard and Poor's industry groups, monthly
SPAH	Financial indicators	indicators	Standard and Poor's Analysts' Handbook, yearly
MSCID	Financial indicators	indicators	Morgan Stanley Capital International, daily
MSCIW	Financial indicators	indicators	Morgan Stanley Capital International, weekly
MSCIM	Financial indicators	indicators	Morgan Stanley Capital International, monthly
EMBI	Financial indicators	indicators	Emerging Markets Bond Index from J.P. Morgan
BONDINDX	Financial indicators	indicators	U.S. bond indexes, from Barclays Capital, Citigroup, Merrill Lynch, and Standard and Poors
BONDS	Financial indicators	indicators	Citigroup bond performance indexes by Citigroup Global Markets, formerly Salomon Smith Barney
ICI	Financial indicators	indicators	Mutual fund activity from the Investment Company Institute
QFR	Financial indicators	indicators	Quarterly financial report by FRB
MBAMTG	Financial indicators	indicators	Mortgage delinquency rates by the Mortgage Bankers Association

Table 41.3 *continued*

Database Name	Offering Type		Description
MBAMOS	Financial	indicators	Mortgage origination surveys, from two Mortgage Banker Association surveys
MARKIT	Financial	indicators	Markit's indexes used to price credit default swaps
DLINQ	Financial	indicators	Consumer delinquency rates by American Bankers Association, monthly
FDIC	Financial	indicators	FDIC banking statistics TIC data from the Quarterly Banking Profile
GOVFIN	Financial	indicators	U.S. government financial statistics by U.S. Treasury
INDUSTRY	Industry		U.S. industry statistics, from Department of Agriculture, trade associations
WARDS	Industry		Automotive statistics, from Ward's Automotive Group
USDA	Industry		World agriculture statistics, from U.S. Department of Agriculture (USDA)
REALTOR	Industry		Home sales from National Association of Realtors
CREALTOR	Industry		Home sales from National Association of Realtors
PREALTOR	Industry		Pending home sales from National Association of Realtors
EEI	Industry		U.S. electric output from the Edison Electric Institute, weekly
ASM	Industry		Annual Survey of Manufactures from the U.S. Census Bureau
RAILSHAR	Industry		Railcar loadings from Association of American Railroads and Atlantic Systems
CHEMWEEK	Industry		Weekly chemical prices from Access Intelligence
BALTIC	Industry		Baltic freight indexes, from the Baltic Exchange in London
OGJ	Industry		U.S. and international energy statistics, from Penwell Publishing's Oil & Gas Journal
OGJANN	Industry		U.S. and international energy statistics, from Penwell Publishing's Oil & Gas Journal, annual
OILWKLY	Industry		Weekly oil statistics, from Penwell Publishing's Oil & Gas Journal
OMI	Industry		Oil market intelligence, from Energy Intelligence
NGW	Industry		Natural Gas Week, from Energy Intelligence
WGI	Industry		World Gas Intelligence, from Energy Intelligence
G10+	Industrial	countries	International Macroeconomic Data by Haver Analytics
PMI	Industrial	countries	Purchasing Managers Indexes by Markit Economics

Table 41.3 *continued*

Database Name	Offering Type	Description
INTSRVYS	Industrial countries	Country surveys
JAPAN	Industrial countries	Japan from Nomura Research Institute
JAPANW	Industrial countries	Japan from Nomura Research Institute, weekly
CANSIM	Industrial countries	Canada from Statistics Canada and the Bank of Canada
CANSIMR	Industrial countries	Canada from Statistics Canada and the Bank of Canada
UK	Industrial countries	United Kingdom, from the Office of National Statistics and the Bank of England
UKSRVYS	Industrial countries	United Kingdom surveys, by NTC Economics, Ltd.
GERMANY	Industrial countries	Germany, from the Deutsche Bundesbank and Statistics Bundesamt
FRANCE	Industrial countries	France, Statistics from INSEE (France's National Statistical Office), the Bank of France, and the Ministry of France
ITALY	Industrial countries	Italy, from Istituto Nazionale di Statistica and Banca d'Italia
SPAIN	Industrial countries	Spain, from the Instituto Nacional de Estadística and the Banco de España
IRELAND	Industrial countries	Ireland, from the Central Statistics Office and Central Bank
NORDIC	Industrial countries	Norway, Sweden, Denmark, Finland
ALPMED	Industrial countries	Austria, Switzerland, Greece, Portugal
BENELUX	Industrial countries	Belgium, Netherlands, Luxembourg, monthly
ANZ	Industrial countries	Australia and New Zealand
EMERGELA	Emerging markets	Latin American macroeconomic data
EMERGECEW	Emerging markets	Central and Eastern Europe and Western Asia
EMERGEMA	Emerging markets	Middle East and African emerging markets
EMERGEPR	Emerging markets	Asia/Pacific Rim emerging markets
CHINA	Emerging markets	CEIC Premium China Database, from CEIC Data Company Ltd (CEIC)

Table 41.3 *continued*

Database Name	Offering Type	Description
INDIA	Emerging markets	CEIC Premium India Database, from CEIC
EUROSTAT	International organizations	European Union data from Eurostat, the European Central Bank, and the European Commission
EULABOR	International organizations	European Union regional labor from Eurostat
OECDMEI	International organizations	Organisation for Economic Cooperation and Development (OECD) main economic indicators
OECDNAQ	International organizations	OECD Quarterly National Accounts
OECDNA	International organizations	OECD Annual National Accounts
OECDFIN	International organizations	OECD Financial Accounts and Financial Balance Sheets
OECDFEI	International organizations	OECD foreign direct investment data
OUTLOOK	International organizations	OECD Economic Outlook
IFS	International organizations	International Financial Statistics from International Monetary Fund
IFSANN	International organizations	International Financial Statistics, annual from International Monetary Fund
IMFBOP	International organizations	Balance of Payment Statistics from International Monetary Fund
IMFBOPA	International organizations	Annual Balance of Payment Statistics from International Monetary Fund
IMFDOT	International organizations	Direction of Trade Statistics from International Monetary Fund
IMFDOTM	International organizations	Direction of Trade Statistics, monthly from International Monetary Fund
IMFWEO	International organizations	Analysis and projections of economic development at global level from International Monetary Fund
BIS	International organizations	International financial claims and liabilities from the Bank for International Settlements
WBPRICES	International organizations	World commodity prices from The World Development Prospects Group (Pinksheets)
WBDEBT	International organizations	Global development finance from The World Bank debt tables
UNPOP	International organizations	United Nations population projections
INTCOMP	International organizations	International comparisons from U.S. Bureau of Labor Statistics

Table 41.3 *continued*

Database Name	Offering Type	Description
MA4CAST	Forecasts and as-reported data	Short-term U.S. economic forecasts from Macro-economic Advisers
MA4CSTL	Forecasts and as-reported data	Long-term U.S. economic forecasts from Macro-economic Advisers
CQM	Forecasts and as-reported data	Canadian quarterly model from Centre for Spatial Economics
CPM	Forecasts and as-reported data	Canadian provincial model from Centre for Spatial Economics
OEFAQMACR	Forecasts and as-reported data	Global macroeconomic forecasts from Oxford Economic Forecasting
OEFAQMAJOR	Forecasts and as-reported data	Global macroeconomic forecasts from Oxford Economic Forecasting
OEFAQINTER	Forecasts and as-reported data	Global macroeconomic forecasts from Oxford Economic Forecasting
OEFAQMINOR	Forecasts and as-reported data	Global macroeconomic forecasts from Oxford Economic Forecasting
OEFAQIND	Forecasts and as-reported data	Global industry from Oxford Economic Forecasting
EIUIAMER	Forecasts and as-reported data	Market indicators and forecasts (America) from Economist Intelligence Unit
EIUIASIA	Forecasts and as-reported data	Market indicators and forecasts (Asia) from Economist Intelligence Unit
EIUIEEUR	Forecasts and as-reported data	Market indicators and forecasts (Eastern Europe) from Economist Intelligence Unit
EIUIMENA	Forecasts and as-reported data	Market indicators and forecasts from Economist Intelligence Unit
EIUISUBS	Forecasts and as-reported data	Market indicators and forecasts from Economist Intelligence Unit
EIUIWEUR	Forecasts and as-reported data	Market indicators and forecasts (Western Europe) from Economist Intelligence Unit
EIUIREGS	Forecasts and as-reported data	Market indicators and forecasts from Economist Intelligence Unit
EIUDAMER	Forecasts and as-reported data	Country data (America) from Economist Intelligence Unit
EIUDASIA	Forecasts and as-reported data	Country data (Asia) from Economist Intelligence Unit
EIUDEEUR	Forecasts and as-reported data	Country data (Eastern Europe) from Economist Intelligence Unit
EIUDMENA	Forecasts and as-reported data	Country data from Economist Intelligence Unit
EIUDSUBS	Forecasts and as-reported data	Country data from Economist Intelligence Unit
EIUDWEUR	Forecasts and as-reported data	Country data (Western Europe) from Economist Intelligence Unit

Table 41.3 *continued*

Database Name	Offering Type	Description
EIUDOECD	Forecasts and as-reported data	Country data (OECD) from Economist Intelligence Unit
EIUDREGS	Forecasts and as-reported data	Country data from Economist Intelligence Unit
AS1REPNA	Forecasts and as-reported data	Action Economics forecast medians and as reported data
MMSAMER	Forecasts and as-reported data	MMS survey medians and as-first-reported data (America) from MMS International
MMSEUR	Forecasts and as-reported data	MMS survey medians and as-first-reported data (Europe) from MMS International
SURVEYS	Forecasts and as-reported data	Economic survey forecasts
AS4CAST	Forecasts and as-reported data	Historical economic forecasts
ASREPGDP	Forecasts and as-reported data	As-reported U.S. gross domestic product from Bureau of Economic Analysis
LABORR	U.S. regional	Monthly payroll employment from Bureau of Labor Statistics
EMPLR	U.S. regional	Labor force and unemployment from Bureau of Labor Statistics
EMPLC	U.S. regional	Labor force and unemployment from Bureau of Labor Statistics
BEAEMPL	U.S. regional	Annual employment by industry
BEAEMPM	U.S. regional	Annual employment by industry
PERMITS	U.S. regional	Residential building permits
PERMITY	U.S. regional	Residential building permits
PERMITP	U.S. regional	Residential building permits
PERMITC	U.S. regional	Residential building permits
PERMITA	U.S. regional	Residential building permits
REGIONAL	U.S. regional	Selected regional indicators
REGIONW	U.S. regional	Selected regional indicators
PIQR	U.S. regional	Personal income
PIR	U.S. regional	Personal income
PIRMSA	U.S. regional	Personal income
PICOUNTY	U.S. regional	Personal income
PIRC1 to 9	U.S. regional	Personal income
MBAMTG	U.S. regional	Mortgage delinquency rates from Mortgage Bankers Association
DLINQR	U.S. regional	Consumer delinquency rates from American Bankers Association
FALOAN	U.S. regional	Real estate and construction delinquency rates by Foresight Analytics
BANKRUPT	U.S. regional	Bankruptcies by county and metropolitan statistical area

Table 41.3 *continued*

Database Name	Offering Type	Description
GSP	U.S. regional	Gross state product from BEA
GDPSA	U.S. regional	Gross domestic product by Metropolitan Statistical Areas (MSA)
USPOP	U.S. regional	Population by age and sex
USPOPC	U.S. regional	Population by age and sex
PORTS	U.S. regional	Trade by port
EXPRQ1 to 9	U.S. regional	Exports by industry and country from the World Institute for Strategic Economic Research and the U.S. Census Bureau
EXPORTSR	U.S. regional	Exports by industry and country from the World Institute for Strategic Economic Research and the U.S. Census Bureau
GOVFINR	U.S. regional	Government financial statistics from the U.S. Census Bureau and Rockefeller Institute of Government
FDICR	U.S. regional	FDIC banking statistics

Examples: SASEHAVR Interface Engine

Before running the following sample code, set your HAVR_DATA environment variable to point to the SAS/ETS SASMISC folder that contains sample Haver databases. The provided sample data files are HAVERD.DAT, HAVERD.IDX, HAVERW.IDX, and HAVERW.DAT. In the following example, the Haver database is called haverw and it resides in the directory lib1. The DATA statement names the SAS output data set hwouty, which will reside in the Work library.

Example 41.1: Examining the Contents of a Haver Database

To see which time series are in your Haver database, use the CONTENTS procedure with the SASEHAVR LIBNAME statement to read the contents.

```
libname lib1 sasehavr "%sysget(HAVR_DATA)"
    freq=yearly start=19920101
    end=20041231
    force=freq;

data hwouty;
    set lib1.haverw;
run;
title1 'Haver Analytics Database, HAVERW.DAT';
```

```

title2 'PROC CONTENTS for Time Series converted to yearly frequency';
proc contents data=hwouty;
run;

```

All time series in the Haver haverw database are listed alphabetically in [Output 41.1.1](#).

Output 41.1.1 Examining the Contents of Haver Analytics Database, haverw.dat

Haver Analytics Database, HAVERW.DAT				
PROC CONTENTS for Time Series converted to yearly frequency				
The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	YEAR4. Date of Observation
2	FA	Num	8	Total Assets: All Commercial Banks (SA, Bil.\$)
3	FCM1M	Num	8	1-Month Treasury Bill Market Bid Yield at Constant Maturity (%)
4	FM1	Num	8	Money Stock: M1 (SA, Bil.\$)
5	FTA1MA	Num	8	Treasury 4-Week Bill: Total Amount Accepted (Bil\$)
6	FTB3	Num	8	3-Month Treasury Bills, Auction (% p.a.)
7	LICN	Num	8	Unemployment Insurance: Initial Claims, State Programs (NSA, Thous)

You could also use the following SAS statements to create a SAS data set named hwouty and to print its contents.

```

libname lib1 sasehavr "%sysget(HAVER_DATA)"
    freq=yearly
    start=19920101
    end=20041231
    force=freq;

data hwouty;
    set lib1.haverw;
run;

title1 'Haver Analytics Database, Frequency=yearly, infile=haverw.dat';
title2 'Define a range inside the data range for OUT= dataset,';
title3 'Using the START=19920101 END=20041231 LIBNAME options.';

proc print data=hwouty;
run;

```

The preceding LIBNAME LIB1 statement specifies that all time series in the haverw database be converted to a yearly frequency but to select only the range of data from January 1, 1992, to December 31, 2004. The resulting SAS data set hwouty is shown in [Output 41.1.2](#).

Output 41.1.2 Defining a Range inside the Data Range for Yearly Time Series

Haver Analytics Database, Frequency=yearly, infile=haverw.dat Define a range inside the data range for OUT= dataset, Using the START=19920101 END=20041231 LIBNAME options.							
Obs	DATE	FA	FCM1M	FM1	FTA1MA	FTB3	LICN
1	1992	3466.3	.	965.31	.	3.45415	407.340
2	1993	3624.6	.	1077.69	.	3.01654	344.934
3	1994	3875.8	.	1144.85	.	4.28673	340.054
4	1995	4209.3	.	1142.70	.	5.51058	357.038
5	1996	4399.1	.	1106.46	.	5.02096	351.358
6	1997	4820.3	.	1069.23	.	5.06885	321.513
7	1998	5254.8	.	1079.56	.	4.80726	317.077
8	1999	5608.1	.	1101.14	.	4.66154	301.581
9	2000	6115.4	.	1104.07	.	5.84644	301.108
10	2001	6436.2	2.31368	1136.31	11.753	3.44471	402.583
11	2002	7024.9	1.63115	1192.03	18.798	1.61548	402.796
12	2003	7302.9	1.02346	1268.40	16.089	1.01413	399.137
13	2004	7950.5	1.26642	1337.89	13.019	1.37557	345.109

Example 41.2: Viewing Quarterly Time Series from a Haver Database

The following statements specify a quarterly frequency conversion of all time series for the period spanning April 1, 2001, to December 31, 2004:

```
libname lib1 sasehavr "%sysget(HAVER_DATA)"
      freq=quarterly
      start=20010401
      end=20041231
      force=freq;

data hwoutq;
  set lib1.haverw;
run;

title1 'Haver Analytics Database, Frequency=quarterly, infile=haverw.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20010401 END=20041231 LIBNAME options.';

proc print data=hwoutq;
run;
```

The resulting SAS data set hwoutq is shown in [Output 41.2.1](#).

Output 41.2.1 Defining a Range inside the Data Range for Quarterly Time Series

HAVER Analytics Database, Frequency=quarterly, infile=haverw.dat Define a range inside the data range for OUT= dataset Using the START=20010401 END=20041231 LIBNAME options.							
Obs	DATE	FA	FCM1M	FM1	FTA1MA	FTB3	LICN
1	2001Q2	6225.4	.	1115.75	.	3.68308	356.577
2	2001Q3	6425.9	2.98167	1157.90	12.077	3.27615	368.408
3	2001Q4	6436.2	2.00538	1169.62	11.753	1.95308	477.685
4	2002Q1	6396.3	1.73077	1186.92	22.309	1.72615	456.292
5	2002Q2	6563.5	1.72769	1183.30	17.126	1.72077	368.592
6	2002Q3	6780.0	1.69231	1189.89	21.076	1.64769	352.892
7	2002Q4	7024.9	1.37385	1207.80	18.798	1.36731	433.408
8	2003Q1	7054.5	1.17846	1231.41	24.299	1.15269	458.746
9	2003Q2	7319.6	1.08000	1262.24	14.356	1.05654	386.185
10	2003Q3	7238.6	0.92000	1286.21	16.472	0.92885	361.346
11	2003Q4	7302.9	0.91538	1293.76	16.089	0.91846	390.269
12	2004Q1	7637.3	0.90231	1312.43	21.818	0.91308	400.585
13	2004Q2	7769.8	0.94692	1332.75	12.547	1.06885	310.508
14	2004Q3	7949.5	1.34923	1343.79	21.549	1.49393	305.862
15	2004Q4	7950.5	1.82429	1362.60	13.019	2.01731	362.171

Example 41.3: Viewing Monthly Time Series from a Haver Database

The following statements convert weekly time series to a monthly frequency:

```

libname lib1 sasehavr "%sysget(HAVER_DATA) "
      freq=monthly
      start=20040401
      end=20041231
      force=freq;

data hwoutm;
  set lib1.haverw;
run;

title1 'Haver Analytics Database, Frequency=monthly, infile=haverw.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20040401 END=20041231 LIBNAME options.';

proc print data=hwoutm;
run;

```

The result from using the range of April 1, 2004, to December 31, 2004, is shown in [Output 41.3.1](#).

Output 41.3.1 Defining a Range inside the Data Range for Monthly Time Series

Haver Analytics Database, Frequency=monthly, infile=haverw.dat Define a range inside the data range for OUT= dataset Using the START=20040401 END=20041231 LIBNAME options.							
Obs	DATE	FA	FCM1M	FM1	FTA1MA	FTB3	LICN
1	APR2004	7703.8	0.9140	1325.73	16.946	0.93900	317.36
2	MAY2004	7704.7	0.9075	1332.96	25.043	1.03375	297.00
3	JUN2004	7769.8	1.0275	1339.50	12.547	1.26625	315.45
4	JUL2004	7859.5	1.1840	1330.13	21.823	1.34900	357.32
5	AUG2004	7890.0	1.3650	1347.84	25.213	1.48000	276.70
6	SEP2004	7949.5	1.5400	1352.40	21.549	1.65000	270.70
7	OCT2004	7967.6	1.6140	1355.28	21.322	1.74750	304.24
8	NOV2004	8053.4	1.9125	1366.06	21.862	2.05625	335.85
9	DEC2004	7950.5	1.9640	1365.60	13.019	2.20200	441.16

Example 41.4: Viewing Weekly Time Series from a Haver Database

The following statements show weekly data that span from September 1, 2004, to December 31, 2004:

```
libname lib1 sasehavr "%sysget(HAVER_DATA) "
      freq=weekly
      start=20040901
      end=20041231;

data hwoutw;
  set lib1.haverw;
run;

title1 'Haver Analytics Database, Frequency=weekly, infile=haverw.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20040901 END=20041231 LIBNAME options.';

proc print data=hwoutw;
run;
```

Output 41.4.1 shows the output.

Output 41.4.1 Defining a Range inside the Data Range for Weekly Time Series

HAVER Analytics Database, Frequency=weekly, infile=haverw.dat Define a range inside the data range for OUT= dataset Using the START=20040901 END=20041231 LIBNAME options.							
Obs	DATE	FA	FCM1M	FM1	FTA1MA	FTB3	LICN
1	29AUG2004	7890.0	1.39	1360.8	27.342	1.515	275.2
2	05SEP2004	7906.2	1.46	1353.7	25.213	1.580	273.7
3	12SEP2004	7962.7	1.57	1338.3	25.255	1.635	250.6
4	19SEP2004	7982.1	1.57	1345.6	15.292	1.640	275.8
5	26SEP2004	7987.9	1.56	1359.7	15.068	1.685	282.7
6	03OCT2004	7949.5	1.54	1366.0	21.549	1.710	279.6
7	10OCT2004	7932.4	1.56	1362.3	17.183	1.685	338.7
8	17OCT2004	7956.9	1.59	1350.1	17.438	1.680	279.8
9	24OCT2004	7957.3	1.63	1346.0	12.133	1.770	317.6
10	31OCT2004	7967.6	1.75	1362.7	21.322	1.855	305.5
11	07NOV2004	7954.1	1.84	1350.4	22.028	1.950	354.8
12	14NOV2004	8009.7	1.89	1354.8	25.495	2.045	311.9
13	21NOV2004	7938.3	1.93	1364.5	24.000	2.075	356.0
14	28NOV2004	8053.4	1.99	1381.3	24.424	2.155	320.7
15	05DEC2004	8010.7	2.05	1379.3	21.862	2.195	472.7
16	12DEC2004	8054.8	2.08	1355.1	22.178	2.210	370.6
17	19DEC2004	8019.2	1.98	1358.3	12.066	2.200	374.7
18	26DEC2004	7995.5	1.89	1366.3	12.787	2.180	446.6

Example 41.5: Viewing Daily Time Series from a Haver Database

Consider viewing the Haver Analytics daily database named haverd. The contents of this database can be seen by submitting the following DATA step:

```
libname lib1 sasehavr "%sysget (HAVER_DATA) "
      freq=daily
      start=20041201
      end=20041231;

data hwoutd;
  set lib1.haverd;
run;

title1 'Haver Analytics Database, HAVERD.DAT';
title2 'PROC CONTENTS for Time Series converted to daily frequency';
proc contents data=hwoutd;
run;
```

Output 41.5.1 shows the output of PROC CONTENTS with the time ID variable DATE followed by the time series variables FCM10, FCM1M, FFED, FFP1D, FXAUS, and TCC with their corresponding attributes such as type, length, format, and label.

Output 41.5.1 Examining the Contents of a Daily Haver Analytics Database, haverd.dat

HAVER Analytics Database, HAVERD.DAT				
PROC CONTENTS for Time Series converted to daily frequency				
The CONTENTS Procedure				
Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	DATE9. Date of Observation
2	FCM10	Num	8	10-Year Treasury Note Yield at Constant Maturity (Avg, % p.a.)
3	FCM1M	Num	8	1-Month Treasury Bill Market Bid Yield at Constant Maturity (%)
4	FFED	Num	8	Federal Funds [Effective] Rate (% p.a.)
5	FFP1D	Num	8	1-Day AA Financial Commercial Paper (% per annum)
6	FXAUS	Num	8	Foreign Exchange Rate: Australia (US\$/Australian\$)
7	TCC	Num	8	Treasury: Closing Operating Cash Balance (Today, Mil.\$)

Example 41.6: Limiting the Range of Time Series from a Haver Database

The following statements limit the range of data to the month of December:

```
libname lib1 sasehavr "%sysget(HAVER_DATA) "
      freq=daily
      start=20041201
      end=20041231;

data hwoutd;
  set lib1.haverd;
run;

title1 'Haver Analytics Database, Frequency=daily, infile=haverd.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20041201 END=20041231 LIBNAME options.';

proc print data=hwoutd;
run;
```

Note that [Output 41.6.1](#) for daily conversion shows the frequency as the SAS time interval for WEEKDAY.

Output 41.6.1 Defining a Range inside the Data Range for Daily Time Series

Haver Analytics Database, Frequency=daily, infile=haverd.dat Define a range inside the data range for OUT= dataset Using the START=20041201 END=20041231 LIBNAME options.							
Obs	DATE	FCM10	FCM1M	FFED	FFP1D	FXAUS	TCC
1	01DEC2004	4.38	2.06	2.04	2.01	0.7754	7564
2	02DEC2004	4.40	2.06	2.00	1.98	0.7769	8502
3	03DEC2004	4.27	2.06	1.98	1.96	0.7778	7405
4	06DEC2004	4.24	2.09	2.04	1.98	0.7748	7019
5	07DEC2004	4.23	2.08	1.99	1.99	0.7754	15520
6	08DEC2004	4.14	2.08	2.01	1.98	0.7545	12329
7	09DEC2004	4.19	2.07	2.05	2.03	0.7532	5441
8	10DEC2004	4.16	2.07	2.09	2.07	0.7495	6368
9	13DEC2004	4.16	2.04	2.18	2.13	0.7592	11395
10	14DEC2004	4.14	2.01	2.24	2.22	0.7566	13695
11	15DEC2004	4.09	1.98	2.31	2.27	0.7652	39765
12	16DEC2004	4.19	1.93	2.26	2.24	0.7563	33640
13	17DEC2004	4.21	1.95	2.23	2.20	0.7607	32764
14	20DEC2004	4.21	1.97	2.26	2.21	0.7644	36216
15	21DEC2004	4.18	1.92	2.24	2.21	0.7660	35056
16	22DEC2004	4.21	1.84	2.25	2.22	0.7656	34599
17	23DEC2004	4.23	1.83	2.34	2.08	0.7654	24467
18	24DEC2004	.	.	2.27	.	0.7689	26898
19	27DEC2004	4.30	1.90	2.24	2.26	0.7777	31874
20	28DEC2004	4.31	1.88	2.24	2.24	0.7787	30513
21	29DEC2004	4.33	1.76	2.23	2.23	0.7709	34754
22	30DEC2004	4.27	1.68	2.24	2.18	0.7785	20045
23	31DEC2004	4.24	1.89	1.97	2.18	0.7805	24690

Example 41.7: Using the WHERE Statement to Subset Time Series from a Haver Database

Using a WHERE statement in the DATA step can be useful for further subsetting.

```
libname lib1 sasehavr "%sysget(HAVER_DATA)"
      freq=daily start=20041101 end=20041231;

data hwoutd;
  set lib1.haverd;
  where date between '01nov2004'd and '01dec2004'd;
run;

title1 'Haver Analytics Database, Frequency=daily, infile=haverd.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20041101 END=20041231 LIBNAME options.';
title4 'Subset further: where date between 01nov2004 and 31dec2004.';
proc print data=hwoutd;
run;
```

Output 41.7.1 shows that the time slice of November 1, 2004, to December 31, 2004, is narrowed further by the DATE test in the WHERE statement to stop at December 1, 2004.

Output 41.7.1 Defining a Range Using the WHERE Statement, START=20041101, and END=20041231

Haver Analytics Database, Frequency=daily, infile=haverd.dat							
Define a range inside the data range for OUT= dataset							
Using the START=20041101 END=20041231 LIBNAME options.							
Subset further: where date between 01nov2004 and 31dec2004.							
Obs	DATE	FCM10	FCM1M	FFED	FFP1D	FXAUS	TCC
1	01NOV2004	4.11	1.79	1.83	1.80	0.7460	35111
2	02NOV2004	4.10	1.86	1.74	1.74	0.7447	34091
3	03NOV2004	4.09	1.83	1.73	1.73	0.7539	14862
4	04NOV2004	4.10	1.85	1.77	1.75	0.7585	23304
5	05NOV2004	4.21	1.86	1.76	1.75	0.7620	19872
6	08NOV2004	4.22	1.88	1.80	1.84	0.7578	21095
7	09NOV2004	4.22	1.89	1.79	1.81	0.7618	16390
8	10NOV2004	4.25	1.88	1.92	1.85	0.7592	12872
9	11NOV2004	.	.	1.92	.	.	12872
10	12NOV2004	4.20	1.91	2.02	1.96	0.7685	28926
11	15NOV2004	4.20	1.92	2.06	2.03	0.7719	10480
12	16NOV2004	4.21	1.93	1.98	1.95	0.7728	13417
13	17NOV2004	4.14	1.90	1.99	1.93	0.7833	10506
14	18NOV2004	4.12	1.91	1.99	1.94	0.7786	6293
15	19NOV2004	4.20	1.98	1.99	1.93	0.7852	5100
16	22NOV2004	4.18	1.98	2.01	1.96	0.7839	6045
17	23NOV2004	4.19	1.99	2.00	1.95	0.7860	18135
18	24NOV2004	4.20	1.98	2.02	1.89	0.7863	14109
19	25NOV2004	.	.	2.02	.	.	14109
20	26NOV2004	4.24	2.01	2.01	1.97	0.7903	20588
21	29NOV2004	4.34	2.02	2.03	2.00	0.7852	24322
22	30NOV2004	4.36	2.07	2.02	2.04	0.7723	18033
23	01DEC2004	4.38	2.06	2.04	2.01	0.7754	7564

Example 41.8: Using the KEEP Option to Subset Time Series from a Haver Database

To select specific time series, you can use the KEEP= or DROP= option as follows:

```
libname lib1 sasehavr "%sysget (HAVER_DATA) "  
    freq=daily  
    start=20041101  
    end=20041231  
    keep="FCM*";  
  
data hwoutd;  
    set lib1.haverd;  
run;  
  
title1 'Haver Analytics Database, Frequency=daily, infile=haverd.dat';  
title2 '    Define a range inside the data range for OUT= dataset';  
title3 '    Using the START=20041101 END=20041231 LIBNAME options.';  
title4 '    Subset further: Using keep="FCM*" LIBNAME option ';  
proc print data=hwoutd;  
run;
```

Output 41.8.1 shows two series that are selected by using KEEP="FCM*" in the LIBNAME statement.

Output 41.8.1 Using the KEEP Option and Defining a Range Using START=20041101 and END=20041231

Haver Analytics Database, Frequency=daily, infile=haverd.dat
 Define a range inside the data range for OUT= dataset
 Using the START=20041101 END=20041231 LIBNAME options.
 Subset further: Using keep="FCM*" LIBNAME option

Obs	DATE	FCM10	FCM1M
1	01NOV2004	4.11	1.79
2	02NOV2004	4.10	1.86
3	03NOV2004	4.09	1.83
4	04NOV2004	4.10	1.85
5	05NOV2004	4.21	1.86
6	08NOV2004	4.22	1.88
7	09NOV2004	4.22	1.89
8	10NOV2004	4.25	1.88
9	11NOV2004	.	.
10	12NOV2004	4.20	1.91
11	15NOV2004	4.20	1.92
12	16NOV2004	4.21	1.93
13	17NOV2004	4.14	1.90
14	18NOV2004	4.12	1.91
15	19NOV2004	4.20	1.98
16	22NOV2004	4.18	1.98
17	23NOV2004	4.19	1.99
18	24NOV2004	4.20	1.98
19	25NOV2004	.	.
20	26NOV2004	4.24	2.01
21	29NOV2004	4.34	2.02
22	30NOV2004	4.36	2.07
23	01DEC2004	4.38	2.06
24	02DEC2004	4.40	2.06
25	03DEC2004	4.27	2.06
26	06DEC2004	4.24	2.09
27	07DEC2004	4.23	2.08
28	08DEC2004	4.14	2.08
29	09DEC2004	4.19	2.07
30	10DEC2004	4.16	2.07
31	13DEC2004	4.16	2.04
32	14DEC2004	4.14	2.01
33	15DEC2004	4.09	1.98
34	16DEC2004	4.19	1.93
35	17DEC2004	4.21	1.95
36	20DEC2004	4.21	1.97
37	21DEC2004	4.18	1.92
38	22DEC2004	4.21	1.84
39	23DEC2004	4.23	1.83
40	24DEC2004	.	.
41	27DEC2004	4.30	1.90
42	28DEC2004	4.31	1.88
43	29DEC2004	4.33	1.76
44	30DEC2004	4.27	1.68
45	31DEC2004	4.24	1.89

You can use the DROP option to drop specific variables from a Haver database. To specify this option, use DROP= instead of KEEP=.

Example 41.9: Using the SOURCE Option to Subset Time Series from a Haver Database

You can use the SOURCE= or DROPSOURCE= option to select specific variables that belong to a certain source, similar to the way you use the KEEP= or DROP= option.

```
libname lib1 sasehavr "%sysget(HAVER_DATA) "
      freq=daily
      start=20041101
      end=20041223
      source="FRB";

data hwoutd;
  set lib1.haverd;
run;

title1 'Haver Analytics Database, Frequency=daily, infile=haverd.dat';
title2 '  Define a range inside the data range for OUT= dataset';
title3 '  Using the START=20041101 END=20041223 LIBNAME options.';
title4 '  Subset further: Using source="FRB" LIBNAME option';
proc print data=hwoutd;
run;
```

[Output 41.9.1](#) shows two series that are selected by using SOURCE="FRB" in the LIBNAME statement.

Output 41.9.1 Using the SOURCE Option and Defining a Range Using START=20041101 and END=20041223

Haver Analytics Database, Frequency=daily, infile=haverd.dat
 Define a range inside the data range for OUT= dataset
 Using the START=20041101 END=20041223 LIBNAME options.
 Subset further: Using source="FRB" LIBNAME option

Obs	DATE	FCM10	FFED	FFP1D	FXAUS
1	01NOV2004	4.11	1.83	1.80	0.7460
2	02NOV2004	4.10	1.74	1.74	0.7447
3	03NOV2004	4.09	1.73	1.73	0.7539
4	04NOV2004	4.10	1.77	1.75	0.7585
5	05NOV2004	4.21	1.76	1.75	0.7620
6	08NOV2004	4.22	1.80	1.84	0.7578
7	09NOV2004	4.22	1.79	1.81	0.7618
8	10NOV2004	4.25	1.92	1.85	0.7592
9	11NOV2004	.	1.92	.	.
10	12NOV2004	4.20	2.02	1.96	0.7685
11	15NOV2004	4.20	2.06	2.03	0.7719
12	16NOV2004	4.21	1.98	1.95	0.7728
13	17NOV2004	4.14	1.99	1.93	0.7833
14	18NOV2004	4.12	1.99	1.94	0.7786
15	19NOV2004	4.20	1.99	1.93	0.7852
16	22NOV2004	4.18	2.01	1.96	0.7839
17	23NOV2004	4.19	2.00	1.95	0.7860
18	24NOV2004	4.20	2.02	1.89	0.7863
19	25NOV2004	.	2.02	.	.
20	26NOV2004	4.24	2.01	1.97	0.7903
21	29NOV2004	4.34	2.03	2.00	0.7852
22	30NOV2004	4.36	2.02	2.04	0.7723
23	01DEC2004	4.38	2.04	2.01	0.7754
24	02DEC2004	4.40	2.00	1.98	0.7769
25	03DEC2004	4.27	1.98	1.96	0.7778
26	06DEC2004	4.24	2.04	1.98	0.7748
27	07DEC2004	4.23	1.99	1.99	0.7754
28	08DEC2004	4.14	2.01	1.98	0.7545
29	09DEC2004	4.19	2.05	2.03	0.7532
30	10DEC2004	4.16	2.09	2.07	0.7495
31	13DEC2004	4.16	2.18	2.13	0.7592
32	14DEC2004	4.14	2.24	2.22	0.7566
33	15DEC2004	4.09	2.31	2.27	0.7652
34	16DEC2004	4.19	2.26	2.24	0.7563
35	17DEC2004	4.21	2.23	2.20	0.7607
36	20DEC2004	4.21	2.26	2.21	0.7644
37	21DEC2004	4.18	2.24	2.21	0.7660
38	22DEC2004	4.21	2.25	2.22	0.7656
39	23DEC2004	4.23	2.34	2.08	0.7654

Example 41.10: Using the GROUP Option to Subset Time Series from a Haver Database

You can use the GROUP= or DROPGROUP= option to select specific variables that belong to a certain group, similar to the way you use the KEEP= or DROP= option.

Output 41.10.1, Output 41.10.2, and Output 41.10.3 show three different cross sections of the same database, haverw, by specifying three unique GROUP= options: GROUP="F*" in LIBNAME LIB1, GROUP="M*" in LIBNAME LIB2, and GROUP="E*" in LIBNAME LIB3.

The following statements specify GROUP="F*" in the LIBNAME LIB1 statement:

```
libname lib1 sasehavr "%sysget (HAVER_DATA) "  
    freq=week.6  
    force=freq  
    start=20040102  
    end=20041001  
    group="F*";  
  
data hwoutwA;  
    set lib1.haverw;  
run;  
  
title1 'Haver Analytics Database, Frequency=week.6, infile=haverw.dat';  
title2 '    Define a range inside the data range for OUT= dataset';  
title3 '    Using the START=20040102 END=20041001 LIBNAME options.';  
title4 '    Subset further: Using group="F*" LIBNAME option';  
proc print data=hwoutwA;  
run;
```

Output 41.10.1 shows the output.

Output 41.10.1 Using the GROUP=F* Option and Defining a Range

Haver Analytics Database, Frequency=week.6, infile=haverw.dat
 Define a range inside the data range for OUT= dataset
 Using the START=20040102 END=20041001 LIBNAME options.
 Subset further: Using group="F*" LIBNAME option

Obs	DATE	FCM1M	FTA1MA	FTB3
1	02JAN2004	0.86	16.089	0.885
2	09JAN2004	0.88	12.757	0.920
3	16JAN2004	0.84	12.141	0.870
4	23JAN2004	0.79	12.593	0.875
5	30JAN2004	0.86	17.357	0.890
6	06FEB2004	0.90	21.759	0.920
7	13FEB2004	0.90	21.557	0.920
8	20FEB2004	0.92	21.580	0.915
9	27FEB2004	0.96	21.390	0.930
10	05MAR2004	0.97	24.119	0.940
11	12MAR2004	0.96	24.294	0.930
12	19MAR2004	0.94	23.334	0.945
13	26MAR2004	0.95	21.400	0.930
14	02APR2004	0.95	21.818	0.945
15	09APR2004	0.94	17.255	0.930
16	16APR2004	0.92	14.143	0.915
17	23APR2004	0.89	14.136	0.935
18	30APR2004	0.87	16.946	0.970
19	07MAY2004	0.89	22.772	0.985
20	14MAY2004	0.89	23.113	1.060
21	21MAY2004	0.91	25.407	1.040
22	28MAY2004	0.94	25.043	1.050
23	04JUN2004	0.97	27.847	1.130
24	11JUN2004	1.01	27.240	1.230
25	18JUN2004	1.05	17.969	1.390
26	25JUN2004	1.08	12.159	1.315
27	02JUL2004	1.11	12.547	1.355
28	09JUL2004	1.14	21.303	1.320
29	16JUL2004	1.16	25.024	1.315
30	23JUL2004	1.21	25.327	1.330
31	30JUL2004	1.30	21.823	1.425
32	06AUG2004	1.34	21.631	1.465
33	13AUG2004	1.37	28.237	1.470
34	20AUG2004	1.36	26.070	1.470
35	27AUG2004	1.39	27.342	1.515
36	03SEP2004	1.46	25.213	1.580
37	10SEP2004	1.57	25.255	1.635
38	17SEP2004	1.57	15.292	1.640
39	24SEP2004	1.56	15.068	1.685
40	01OCT2004	1.54	21.549	1.710

The following statements specify GROUP="M*" in the LIBNAME LIB2 statement:

```
libname lib2 sasehavr "%sysget(HAVER_DATA) "
    freq=week.6
    force=freq start=20040102
    end=20041001
    group="M*";

data hwoutwB;
    set lib2.haverw;
run;

title1 'Haver Analytics Database, Frequency=week.6, infile=haverw.dat';
title2 '    Define a range inside the data range for OUT= dataset';
title3 '    Using the START=20040102 END=20041001 LIBNAME options.';
title4 '    Subset further: Using group="M*" LIBNAME option';
proc print data=hwoutwB;
run;
```

[Output 41.10.2](#) shows the output.

Output 41.10.2 Using the GROUP=M* Option and Defining a Range

Haver Analytics Database, Frequency=week.6, infile=haverw.dat
 Define a range inside the data range for OUT= dataset
 Using the START=20040102 END=20041001 LIBNAME options.
 Subset further: Using group="M*" LIBNAME option

Obs	DATE	FA	FM1
1	02JAN2004	7302.9	1298.2
2	09JAN2004	7351.2	1294.3
3	16JAN2004	7378.5	1286.8
4	23JAN2004	7434.7	1296.7
5	30JAN2004	7492.4	1305.1
6	06FEB2004	7510.4	1303.1
7	13FEB2004	7577.8	1309.1
8	20FEB2004	7648.7	1317.0
9	27FEB2004	7530.6	1321.1
10	05MAR2004	7546.7	1316.2
11	12MAR2004	7602.0	1312.7
12	19MAR2004	7603.0	1324.0
13	26MAR2004	7625.5	1337.6
14	02APR2004	7637.3	1337.9
15	09APR2004	7667.4	1327.3
16	16APR2004	7692.5	1321.8
17	23APR2004	7698.4	1322.2
18	30APR2004	7703.8	1331.6
19	07MAY2004	7686.8	1342.5
20	14MAY2004	7734.6	1325.5
21	21MAY2004	7695.8	1330.1
22	28MAY2004	7704.7	1337.7
23	04JUN2004	7715.1	1329.0
24	11JUN2004	7754.0	1324.4
25	18JUN2004	7753.2	1336.4
26	25JUN2004	7796.2	1345.8
27	02JUL2004	7769.8	1351.4
28	09JUL2004	7852.3	1330.1
29	16JUL2004	7852.8	1326.3
30	23JUL2004	7854.7	1323.5
31	30JUL2004	7859.5	1340.6
32	06AUG2004	7847.9	1337.3
33	13AUG2004	7888.7	1340.1
34	20AUG2004	7851.8	1347.3
35	27AUG2004	7890.0	1360.8
36	03SEP2004	7906.2	1353.7
37	10SEP2004	7962.7	1338.3
38	17SEP2004	7982.1	1345.6
39	24SEP2004	7987.9	1359.7
40	01OCT2004	7949.5	1366.0

The following statements specify GROUP="E*" in the LIBNAME LIB3 statement:

```
libname lib3 sasehavr "%sysget(HAVER_DATA) "  
    freq=week.6  
    force=freq  
    start=20040102  
    end=20041001  
    group="E*";  
  
data hwoutwC;  
    set lib3.haverw;  
run;  
  
title1 'Haver Analytics Database, Frequency=week.6, infile=haverw.dat';  
title2 '    Define a range inside the data range for OUT= dataset';  
title3 '    Using the START=20040102 END=20041001 LIBNAME options.';  
title4 '    Subset further: Using group="E*" LIBNAME option';  
proc print data=hwoutwC;  
run;
```

[Output 41.10.3](#) shows the output.

Output 41.10.3 Using the GROUP=E* Option and Defining a Range

Haver Analytics Database, Frequency=week.6, infile=haverw.dat
 Define a range inside the data range for OUT= dataset
 Using the START=20040102 END=20041001 LIBNAME options.
 Subset further: Using group="E*" LIBNAME option

Obs	DATE	LICN
1	02JAN2004	552.8
2	09JAN2004	677.9
3	16JAN2004	490.8
4	23JAN2004	382.3
5	30JAN2004	406.3
6	06FEB2004	433.2
7	13FEB2004	341.6
8	20FEB2004	328.2
9	27FEB2004	342.1
10	05MAR2004	339.0
11	12MAR2004	312.1
12	19MAR2004	304.5
13	26MAR2004	296.8
14	02APR2004	304.2
15	09APR2004	350.7
16	16APR2004	335.0
17	23APR2004	313.7
18	30APR2004	283.2
19	07MAY2004	292.8
20	14MAY2004	297.1
21	21MAY2004	294.0
22	28MAY2004	304.1
23	04JUN2004	308.2
24	11JUN2004	312.4
25	18JUN2004	322.5
26	25JUN2004	318.7
27	02JUL2004	349.9
28	09JUL2004	444.5
29	16JUL2004	394.4
30	23JUL2004	315.7
31	30JUL2004	282.1
32	06AUG2004	291.5
33	13AUG2004	268.0
34	20AUG2004	272.1
35	27AUG2004	275.2
36	03SEP2004	273.7
37	10SEP2004	250.6
38	17SEP2004	275.8
39	24SEP2004	282.7
40	01OCT2004	279.6

Example 41.11: Using the OUTSELECT=ON Option to View the Key Selection Variables in a Haver Database

Suppose you want to select your time series based on geography codes or source codes. To construct your wildcard for selection, first run with the OUTSELECT=ON option to see the possible values for each selection key.

```
libname lib1 sasehavr "%sysget(HAVER_DATA) "
      outselect=on ;

data validD1;
  set lib1.haverd;
run;

title1 'OUTSELECT=ON, Print the OUT= Data Set';
title2 'Shows the Values for Key Selection Variables: ';
title3 'Name, Source, Geog1, Geog2, Shortsrc, Longsrc';
title4 'OUTSELECT=ON, the CONTENTS Procedure with Variable Names and Labels';
proc print data=validD1;
run;

proc contents data=validD1;
run;
```

Output 41.11.1 shows the output values for each key selection variable.

Output 41.11.1 OUTSELECT=ON Option Shows the Values for Key Selection Variables

OUTSELECT=ON, Print the OUT= Data Set						
Shows the Values for Key Selection Variables:						
Name, Source, Geog1, Geog2, Shortsrc, Longsrc						
OUTSELECT=ON, the CONTENTS Procedure with Variable Names and Labels						
Obs	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC	LONGSRC
1	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC	LONGSRC
2	FCM10	FRB	0000000		FRB	Federal Reserve Board
3	FCM1M	UST	0000000		FRB	Federal Reserve Board
4	FFED	FRB	0000000		FRB	Federal Reserve Board
5	FFP1D	FRB	0000000		FRB	Federal Reserve Board
6	FXAUS	FRB	0000000		FRBNY	Federal Reserve Bank of New York
7	TCC	UST	0000000		TREASURY	U.S. Treasury
Obs	FCM10	FCM1M	FFED	FFP1D	FXAUS	TCC
1						
2						
3						
4						
5						
6						
7						

If you also want to see a list of all the variables and their corresponding labels for this OUTSELECT=ON data set, you can run the CONTENTS Procedure.

Output 41.11.2 shows the contents of the output data set.

Output 41.11.2 OUTSELECT=ON Option Shows the Contents of HAVERD.DAT

Alphabetic List of Variables and Attributes			
#	Variable	Type	Len Label
7	FCM10	Char	8 10-Year Treasury Note Yield at Constant Maturity (Avg, % p.a.)
8	FCM1M	Char	8 1-Month Treasury Bill Market Bid Yield at Constant Maturity (%)
9	FFED	Char	8 Federal Funds [Effective] Rate (% p.a.)
10	FFP1D	Char	8 1-Day AA Financial Commercial Paper (% per annum)
11	FXAUS	Char	8 Foreign Exchange Rate: Australia (US\$/Australian\$)
3	GEOG1	Char	8 DLXRECORD.Geography1
4	GEOG2	Char	8 DLXRECORD.Geography2
6	LONGSRC	Char	70 DLXRECORD.LongSource
1	NAME	Char	10 DLXRECORD.VarName
5	SHORTSRC	Char	10 DLXRECORD.ShortSourc
2	SOURCE	Char	6 DLXRECORD.Source
12	TCC	Char	8 Treasury: Closing Operating Cash Balance (Today, Mil.\$)

Example 41.12: Selecting Variables Based on Short Source Key Code

Using the information from [Example 41.11](#), you can now select time series by using selection keys such as the SHORT=, GEOG1=, or GEOG2= options. Since the short source values are nontrivial in database haverd, it is best in this case to use the SHORT= option. For more information about using geography codes as selection keys, see [Output 41.13.1](#) for the GEOG1= option and [Output 41.13.2](#) for the GEOG2= option.

```
Libname lib1 sasehavr "%sysget(HAVER_DATA)"
      short="GOLDMAN, FRB, CRB";
data valide2;
  set lib1.haverd;
  where date between '18jan2005'd and '29mar2005'd;
run;

title1 'SHORT= option list: GOLDMAN, FRB, CRB';
title2 'Should contain these time series: ';
title3 'FCM10, FCM1M, FFED, FFP1D';
title4 'SHORT= option, Print the OUT= Valide2 Data Set';
proc print data=valide2;
run;

title4 'SHORT= option, Print the Contents of OUT= Valide2 Data Set';
proc contents data=valide2;
run;
```

[Output 41.12.1](#) shows the output for the SHORT= option.

Output 41.12.1 SHORT= Option Shows the Selected Variables

SHORT= option list: GOLDMAN, FRB, CRB
 Should contain these time series:
 FCM10, FCM1M, FFED, FFP1D
 SHORT= option, Print the Contents of OUT= ValidE2 Data Set

Obs	DATE	FCM10	FCM1M	FFED	FFP1D
1	18JAN2005	4.21	2.05	2.31	2.30
2	19JAN2005	4.20	1.95	2.19	2.22
3	20JAN2005	4.17	1.89	2.25	2.22
4	21JAN2005	4.16	2.02	2.26	2.19
5	24JAN2005	4.14	2.05	2.26	2.22
6	25JAN2005	4.20	2.13	2.29	2.22
7	26JAN2005	4.21	2.16	2.33	2.26
8	27JAN2005	4.22	2.16	2.39	2.30
9	28JAN2005	4.16	2.12	2.48	2.37
10	31JAN2005	4.14	2.06	2.50	2.47
11	01FEB2005	4.15	2.23	2.40	2.47
12	02FEB2005	4.15	2.22	2.29	2.45
13	03FEB2005	4.18	2.18	2.49	2.46
14	04FEB2005	4.09	2.20	2.51	2.45
15	07FEB2005	4.07	2.27	2.50	2.47
16	08FEB2005	4.05	2.34	2.48	2.45
17	09FEB2005	4.00	2.34	2.50	2.45
18	10FEB2005	4.07	2.35	2.51	2.47
19	11FEB2005	4.10	2.36	2.50	2.48
20	14FEB2005	4.08	2.37	2.51	2.50
21	15FEB2005	4.10	2.40	2.53	2.54
22	16FEB2005	4.16	2.39	2.48	2.45
23	17FEB2005	4.19	2.40	2.50	2.47
24	18FEB2005	4.27	2.39	2.51	2.45
25	21FEB2005	.	.	2.51	.
26	22FEB2005	4.29	2.43	2.57	2.49
27	23FEB2005	4.27	2.47	2.53	2.48
28	24FEB2005	4.29	2.48	2.55	2.52
29	25FEB2005	4.27	2.50	2.54	2.52
30	28FEB2005	4.36	2.51	2.52	2.58
31	01MAR2005	4.38	2.55	2.39	2.51
32	02MAR2005	4.38	2.54	2.48	2.44
33	03MAR2005	4.39	2.55	2.51	2.49
34	04MAR2005	4.32	2.56	2.50	2.46
35	07MAR2005	4.31	2.59	2.51	2.49
36	08MAR2005	4.38	2.61	2.49	2.47
37	09MAR2005	4.52	2.60	2.50	2.45
38	10MAR2005	4.48	2.60	2.52	2.49
39	11MAR2005	4.56	2.60	2.51	2.48
40	14MAR2005	4.52	2.62	2.59	2.53
41	15MAR2005	4.54	2.70	2.61	2.60
42	16MAR2005	4.52	2.68	2.57	2.50
43	17MAR2005	4.47	2.68	2.68	2.58
44	18MAR2005	4.51	2.70	2.70	2.68
45	21MAR2005	4.53	2.72	2.71	2.72
46	22MAR2005	4.63	2.77	2.72	2.68
47	23MAR2005	4.61	2.72	2.73	2.69
48	24MAR2005	4.60	2.70	2.75	2.62
49	25MAR2005	.	.	2.80	2.59
50	28MAR2005	4.64	2.69	2.79	2.79
51	29MAR2005	.	.	.	2.76

If you also want to see a list of all the variables and their corresponding labels for this data set, you can run the CONTENTS Procedure.

Output 41.12.2 shows the output.

Output 41.12.2 SHORT= Option Shows the Contents of the validE2 Data Set

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	DATE9. Date of Observation
2	FCM10	Num	8	10-Year Treasury Note Yield at Constant Maturity (Avg, % p.a.)
3	FCM1M	Num	8	1-Month Treasury Bill Market Bid Yield at Constant Maturity (%)
4	FFED	Num	8	Federal Funds [Effective] Rate (% p.a.)
5	FFP1D	Num	8	1-Day AA Financial Commercial Paper (% per annum)

Example 41.13: Selecting Variables Based on Geography Key Codes

Since the haverd database did not have interesting geography codes, the following statements access the INTWKLY database by using its more complete geography key codes to select the desired time series from the specified geography codes:

```

Libname lib1 sasehavr "%sysget(HAVER_DATA_NEW) "
outselect=on
keep="R273RF3,X924USBE,R023DF,R273G1,F023A,F158FBS,F023ACR,X156VEB,F023ACE";

data valid1(keep=NAME SOURCE GEOG1 GEOG2 SHORTSRC LONGSRC);
set lib1.intwkly;
run;

title1 'OUTSELECT=ON, Print the OUT= Data Set';
title2 'Shows the Values for Key Selection Variables: ';
title3 'Name, Source, Geog1, Geog2, Shortsrc, Longsrc';
title4 'OUTSELECT=ON, the CONTENTS Procedure with Variable Names and Labels';
proc print data=valid1;
run;

Libname lib2 sasehavr "%sysget(HAVER_DATA_NEW) "
geog1="156";

data valid2(
keep=date R273RF3 X924USBE R023DF R273G1 F023A F158FBS F023ACR X156VEB F023ACE);
set lib2.intwkly;
run;

title1 'Only one GEOG1 Code, 156, contains time series X156VEB';
title2 'Select Geography Code 1 Option: ';
title3 'GEOG1= option';

```

```

title4 'Only Time Series X156VEB has Geog1 = 156';

proc contents
  data=valid2;
run;

Libname lib3 sasehavr "%sysget(HAVER_DATA_NEW) "
  geog2="299";

data valid3(
  keep=date R273RF3 X924USBE R023DF R273G1 F023A F158FBS F023ACR X156VEB F023ACE);
  set lib3.intwkly;
run;

title1 'Only one GEOG2 Code, 299, contains time series X156VEB';
title2 'Select Geography Code 2 Option: ';
title3 'GEOG2= option';
title4 'Only Time Series X156VEB has Geog2 = 299';

proc contents
  data=valid3;
run;

title1 'Compare GEOG1 Code 156';
title2 'Over nonmissing values range';
title3 'With GEOG2 Code 299';
title4 'Over nonmissing values range';

proc compare listall briefsummary criterion=1.0e-5
  base=valid2(
    where=( date between '09jan1998'd and '28dec2007'd ))
  compare=valid3(
    where=( date between '09jan1998'd and '28dec2007'd ));
run;

```

Output 41.13.1, Output 41.13.2, Output 41.13.3, and Output 41.13.4 show the output.

Output 41.13.1 OUTSELECT=ON Option Shows the Values for Key Selection Variables

Compare GEOG1 Code 156 Over nonmissing values range With GEOG2 Code 299 Over nonmissing values range					
Obs	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC
1	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC
2	F023A	STLF	023		ECB
3	F023ACE	STLF	023		ECB
4	F023ACR	STLF	023		ECB
5	F158FBS	---	158		JMoF
6	R023DF	---	023		ECB
7	X156VEB	STLF	156	299	BOCAN
8	X924USBE	STLF	924	111	SAFE
Obs	LONGSRC				
1	LONGSRC				
2	European Central Bank				
3	European Central Bank				
4	European Central Bank				
5	Ministry of Finance				
6	European Central Bank				
7	Bank of Canada				
8	China State Administration of Foreign Exchange				

Output 41.13.2 Only One GEOG1 Code, 156, Contains Time Series X156VEB

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	DATE9. Date of Observation
2	X156VEB	Num	8	Canada: Venezuelan Bolivar Noon Exchange Rate (C\$/Bolivar)

Output 41.13.3 Only One GEOG2 Code, 299, Contains Time Series X156VEB

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	DATE9. Date of Observation
2	X156VEB	Num	8	Canada: Venezuelan Bolivar Noon Exchange Rate (C\$/Bolivar)

Output 41.13.4 Comparing GEOG1 and GEOG2 Access of INTWKLY Haver DLX Database

Compare GEOG1 Code 156 Over nonmissing values range With GEOG2 Code 299 Over nonmissing values range					
Obs	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC
1	NAME	SOURCE	GEOG1	GEOG2	SHORTSRC
2	F023A	STLF	023		ECB
3	F023ACE	STLF	023		ECB
4	F023ACR	STLF	023		ECB
5	F158FBS	---	158		JMoF
6	R023DF	---	023		ECB
7	X156VEB	STLF	156	299	BOCAN
8	X924USBE	STLF	924	111	SAFE
Obs	LONGSRC				
1	LONGSRC				
2	European Central Bank				
3	European Central Bank				
4	European Central Bank				
5	Ministry of Finance				
6	European Central Bank				
7	Bank of Canada				
8	China State Administration of Foreign Exchange				
Only one GEOG1 Code: 156, contains time series X156VEB					
Select Geography Code 1 Option:					
GEOG1= option					
Only Time Series X156VEB has Geog1 = 156					
The CONTENTS Procedure					
Data Set Name	WORK.VALID2			Observations	2404
Member Type	DATA			Variables	2
Engine	V9			Indexes	0
Created	Thursday, April 09, 2009 03:35:56 PM			Observation Length	16
Last Modified	Thursday, April 09, 2009 03:35:56 PM			Deleted Observations	0
Protection				Compressed	NO
Data Set Type				Sorted	NO
Label					
Data Representation	WINDOWS_32				
Encoding	wlatin1 Western (Windows)				

Output 41.13.4 continued

Engine/Host Dependent Information			
Data Set Page Size	4096		
Number of Data Set Pages	10		
First Data Page	1		
Max Obs per Page	252		
Obs in First Data Page	172		
Number of Data Set Repairs	0		
Filename	C:\DOCUME~1\saskff\LOCALS~1\Temp\SAS Temporary Files_TD3388\valid2.sas7bdat		
Release Created	9.0202M2		
Host Created	XP_PRO		
Alphabetic List of Variables and Attributes			
#	Variable	Type	Len Format Label
1	DATE	Num	8 DATE9. Date of Observation
2	X156VEB	Num	8 Canada: Venezuelan Bolivar Noon Exchange Rate (C\$/Bolivar)
Only one GEOG2 Code: 299, contains time series X156VEB			
Select Geography Code 2 Option:			
GEOG2= option			
Only Time Series X156VEB has Geog2 = 299			
The CONTENTS Procedure			
Data Set Name	WORK.VALID3	Observations	682
Member Type	DATA	Variables	2
Engine	V9	Indexes	0
Created	Thursday, April 09, 2009 03:39:53 PM	Observation Length	16
Last Modified	Thursday, April 09, 2009 03:39:53 PM	Deleted Observations	0
Protection		Compressed	NO
Data Set Type		Sorted	NO
Label			
Data Representation	WINDOWS_32		
Encoding	wlatin1 Western (Windows)		
Engine/Host Dependent Information			
Data Set Page Size	4096		
Number of Data Set Pages	4		
First Data Page	1		
Max Obs per Page	252		
Obs in First Data Page	172		
Number of Data Set Repairs	0		
Filename	C:\DOCUME~1\saskff\LOCALS~1\Temp\SAS Temporary Files_TD3388\valid3.sas7bdat		
Release Created	9.0202M2		
Host Created	XP_PRO		

Output 41.13.4 *continued*

Alphabetic List of Variables and Attributes				
#	Variable	Type	Len	Format Label
1	DATE	Num	8	DATE9. Date of Observation
2	X156VEB	Num	8	Canada: Venezuelan Bolivar Noon Exchange Rate (C\$/Bolivar)
Compare GEOG1 Code 156 Over nonmissing values range With GEOG2 Code 299 Over nonmissing values range				
The COMPARE Procedure Comparison of WORK.VALID2 with WORK.VALID3 (Method=RELATIVE(2.22E-09), Criterion=0.00001)				
NOTE: No unequal values were found. All values compared are exactly equal.				

References

Haver Analytics (2009), *DLX API Programmer's Reference*, New York [<http://www.haver.com/>]

Haver Analytics (2009), *DLX Database Profile*, New York

Haver Analytics (2009), *Data Link Express, Time Series Data Base Management System*, New York [<http://www.haver.com/>]

Part IV

Time Series Forecasting System

Chapter 42

Overview of the Time Series Forecasting System

Contents

Introduction	2821
Using the Time Series Forecasting System	2822
SAS Software Products Needed	2823

Introduction

The Time Series Forecasting system forecasts future values of time series variables by extrapolating trends and patterns in the past values of the series or by extrapolating the effect of other variables on the series. The system provides convenient point-and-click windows to control the time series analysis and forecasting tools of SAS/ETS software.

You can use the system in a fully automatic mode, or you can use the system’s diagnostic features and time series modeling tools interactively to develop forecasting models customized to best predict your time series. The system provides both graphical and statistical features to help you choose the best forecasting method for each series.

The following is a brief summary of the features of the Time Series Forecasting system. You can use the system in the following ways:

- use a wide variety of forecasting methods, including several kinds of exponential smoothing models, Winters method, and ARIMA (Box-Jenkins) models. You can also produce forecasts by combining the forecasts from several models.
- use predictor variables in forecasting models. Forecasting models can include time trend curves, regressors, intervention effects (dummy variables), adjustments you specify, and dynamic regression (transfer function) models.
- view plots of the data, predicted versus actual values, prediction errors, and forecasts with confidence limits, as well as autocorrelations and results of white noise and stationarity tests. Any of these plots can be zoomed and can represent raw or transformed series.
- use hold-out samples to select the best forecasting method

- compare goodness-of-fit measures for any two forecasting models side by side or list all models sorted by a particular fit statistic
- view the predictions and errors for each model in a spreadsheet or compare the fit of any two models in a spreadsheet
- examine the fitted parameters of each forecasting model and their statistical significance
- control the automatic model selection process: the set of forecasting models considered, the goodness-of-fit measure used to select the best model, and the time period used to fit and evaluate models
- customize the system by adding forecasting models for the automatic model selection process and for point-and-click manual selection
- save your work in a project catalog
- print an audit trail of the forecasting process
- show source statements for PROC ARIMA code
- save and print system output including spreadsheets and graphs

Using the Time Series Forecasting System

Chapters starting from Chapter 43, “[Getting Started with Time Series Forecasting](#),” through Chapter 47, “[Using Predictor Variables](#),” contain a series of example sessions that show the major features of the system. Chapters from Chapter 48, “[Command Reference](#),” through Chapter 50, “[Forecasting Process Details](#),” serve as reference and provide more details about how the system operates. The reference chapters contain a complete list of system features.

To get started using the Time Series Forecasting system, it is a good idea to work through a few of the example sessions. Start with Chapter 43, “[Getting Started with Time Series Forecasting](#),” and use the system to reproduce the steps shown in the examples. Continue with the other chapters when you feel comfortable using the system.

The example sessions make use of time series data sets contained in the SASHELP library: `air`, `citimon`, `citiqtr`, `citiyr`, `citiwk`, `citiday`, `gnp`, `retail`, `usecon`, and `workers`. You can use these data sets to work through the example sessions or to experiment further with the system.

Once you are familiar with how the system operates, start working with your own data to build your own forecasting models. When you have questions, consult the reference chapters mentioned above for more information about particular features.

The Time Series Forecasting system forecasts *time series*, that is, variables that consist of ordered observations taken at regular intervals over time. Since the Time Series Forecasting system is a part of the SAS software system, time series values must be stored as variables in a SAS data set or data view, with the observations representing the time periods. The data can also be stored in an external spreadsheet or data base if you license SAS/ACCESS software.

The Time Series Forecasting System chapters refer to *series* and *variables*. Since time series are stored as variables in SAS data sets or data views, these terms are used interchangeably. However, the term *series* is preferred when attention is focused on the sequence of data values, and the term *variable* is preferred when attention is focused on the data set.

SAS Software Products Needed

The Time Series Forecasting system is part of SAS/ETS software. To use it, you must have a license for SAS/ETS. To use the graphical display features of the system, you must also license SAS/GRAPH software.

Chapter 43

Getting Started with Time Series Forecasting

Contents

The Time Series Forecasting Window	2826
Outline of the Forecasting Process	2831
Specify the Input Data Set	2831
Provide a Valid Time ID Variable	2831
Select and Fit a Forecasting Model for Each Series	2832
Produce the Forecasts	2832
Save Your Work	2832
Summary	2833
The Input Data Set	2833
The Data Set Selection Window	2833
Time Series Data Sets, ID Variables, and Time Intervals	2837
Automatic Model Fitting Window	2838
Produce Forecasts Window	2846
The Forecast Data Set	2848
Forecasting Projects	2852
Saving and Restoring Project Information	2854
Sharing Projects	2858
Develop Models Window	2859
Introduction	2859
Fitting Models	2862
Model List and Statistics of Fit	2867
Model Viewer	2869
Prediction Error Plots	2871
Autocorrelation Plots	2872
White Noise and Stationarity Plots	2873
Parameter Estimates Table	2875
Statistics of Fit Table	2876
Changing to a Different Model	2877
Forecasts and Confidence Limits Plots	2878
Data Table	2879
Closing the Model Viewer	2880

This chapter outlines the forecasting process and introduces the major windows of the system through three example sessions.

The first example, beginning with the section “The Time Series Forecasting Window,” shows how to use the system for fully automated forecasting of a set of time series. This example also introduces the system’s features for viewing data and forecasts through tables and interactive graphs. It also shows how to save and restore forecasting work in SAS catalogs.

The second example, beginning with the section “Develop Models Window,” introduces the features for developing the best forecasting models for individual time series. The chapter concludes with an example showing how to create dating variables for your data in the form expected by the system.

After working through the examples in this chapter, you should be able to do the following:

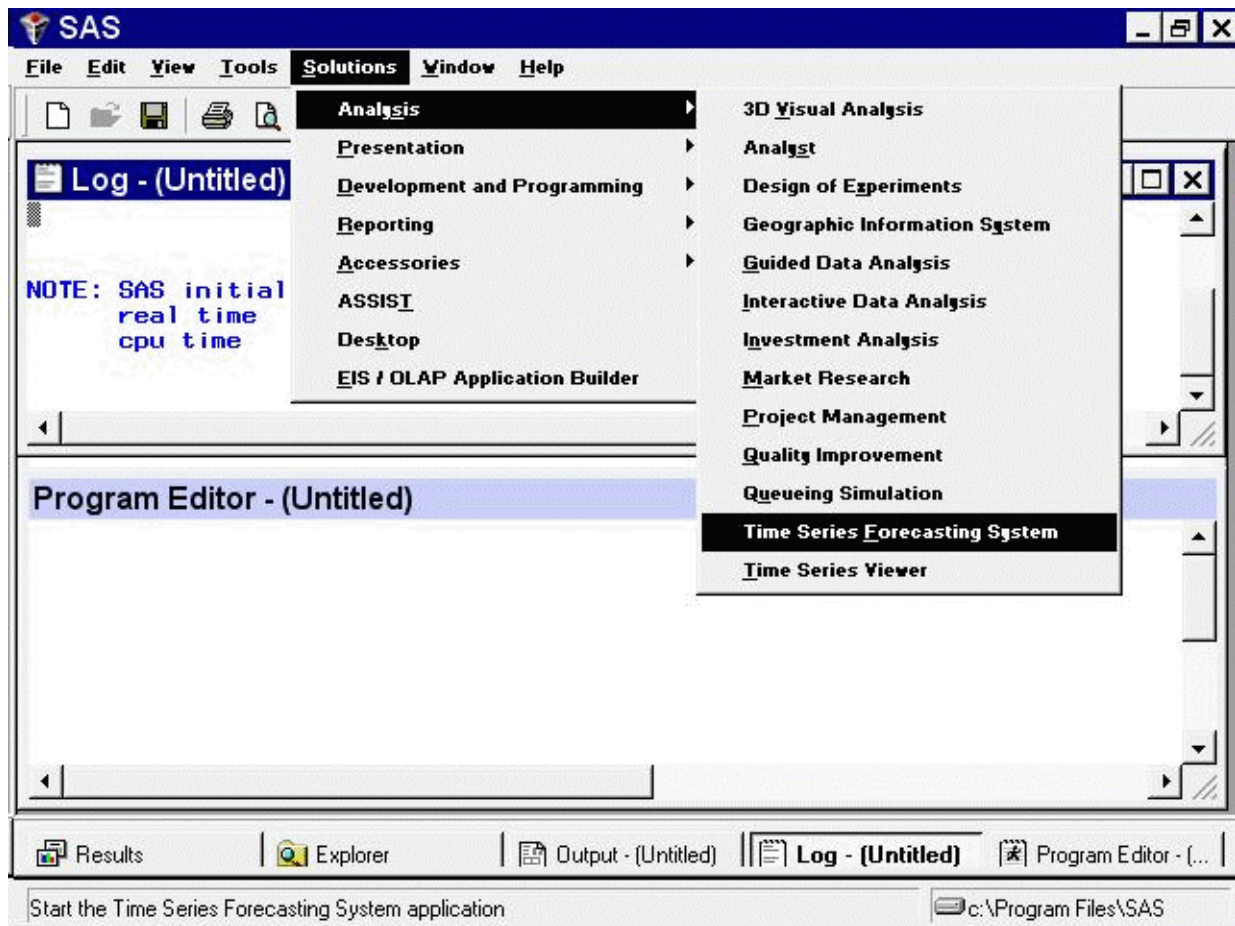
- select a data set of time series to work with and specify its periodicity and time ID variable
- use the automatic forecasting model selection feature to create forecasting models for the variables in a data set
- produce and save forecasts of variables in a data set
- examine your data and forecasts as tables of values and through interactive graphs
- save and restore your forecasting models by using project files in a SAS catalog and edit project information
- use some of the model development features to fit and select forecasting models for individual time series variables

This chapter introduces these topics and helps you get started using the system. Later chapters present these topics in greater detail and document more advanced features and options.

The Time Series Forecasting Window

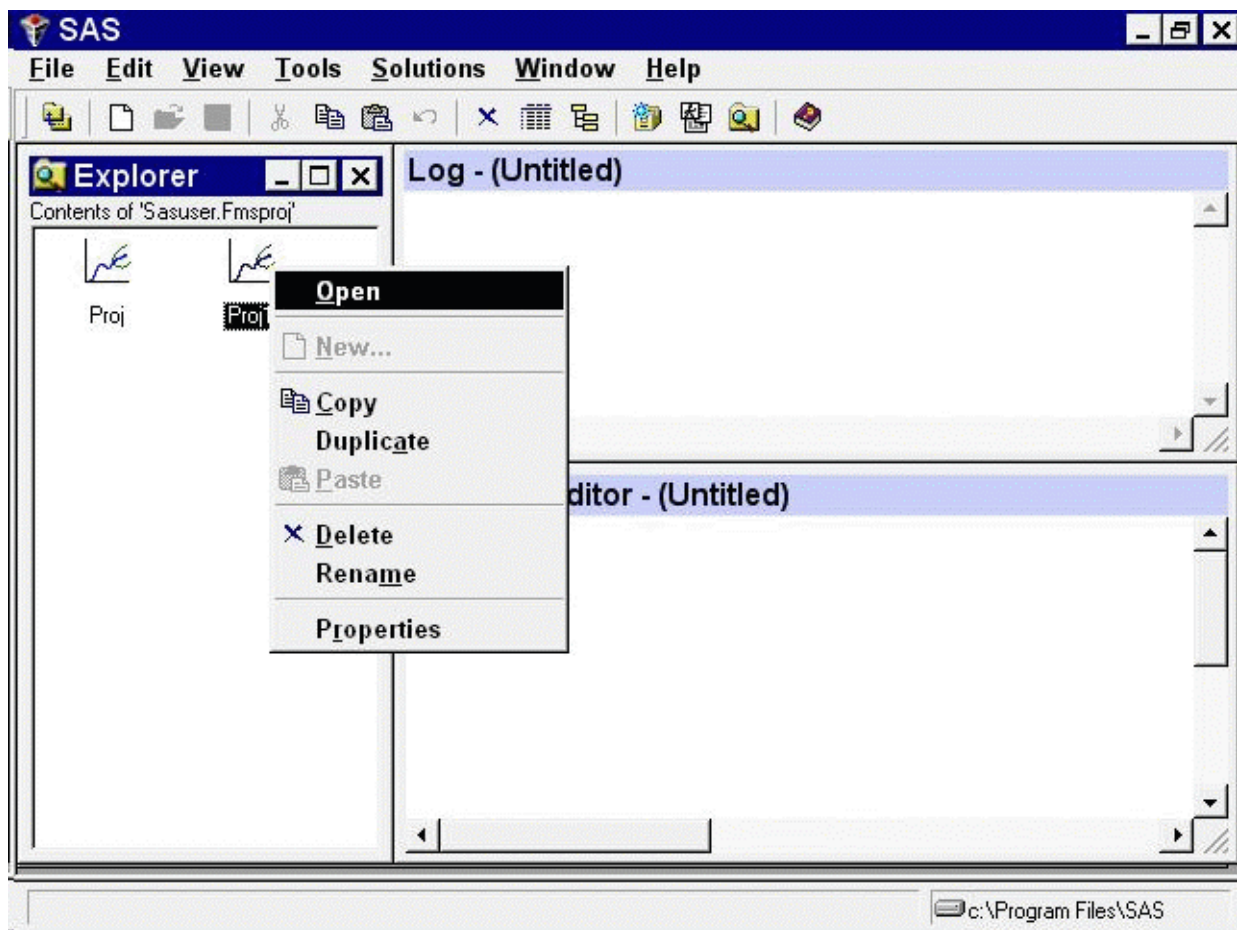
There are several ways to get to the Time Series Forecasting System. If you prefer to use commands, invoke the system by entering `forecast` on the command line. You can optionally specify additional information on the command line; see Chapter 48, “[Command Reference](#),” for details.

If you are using the SAS windowing environment with pull-down menus, select the Solutions menu from the menu bar, select the Analysis item, and then select `Time Series Forecasting System`, as shown in [Figure 43.1](#).

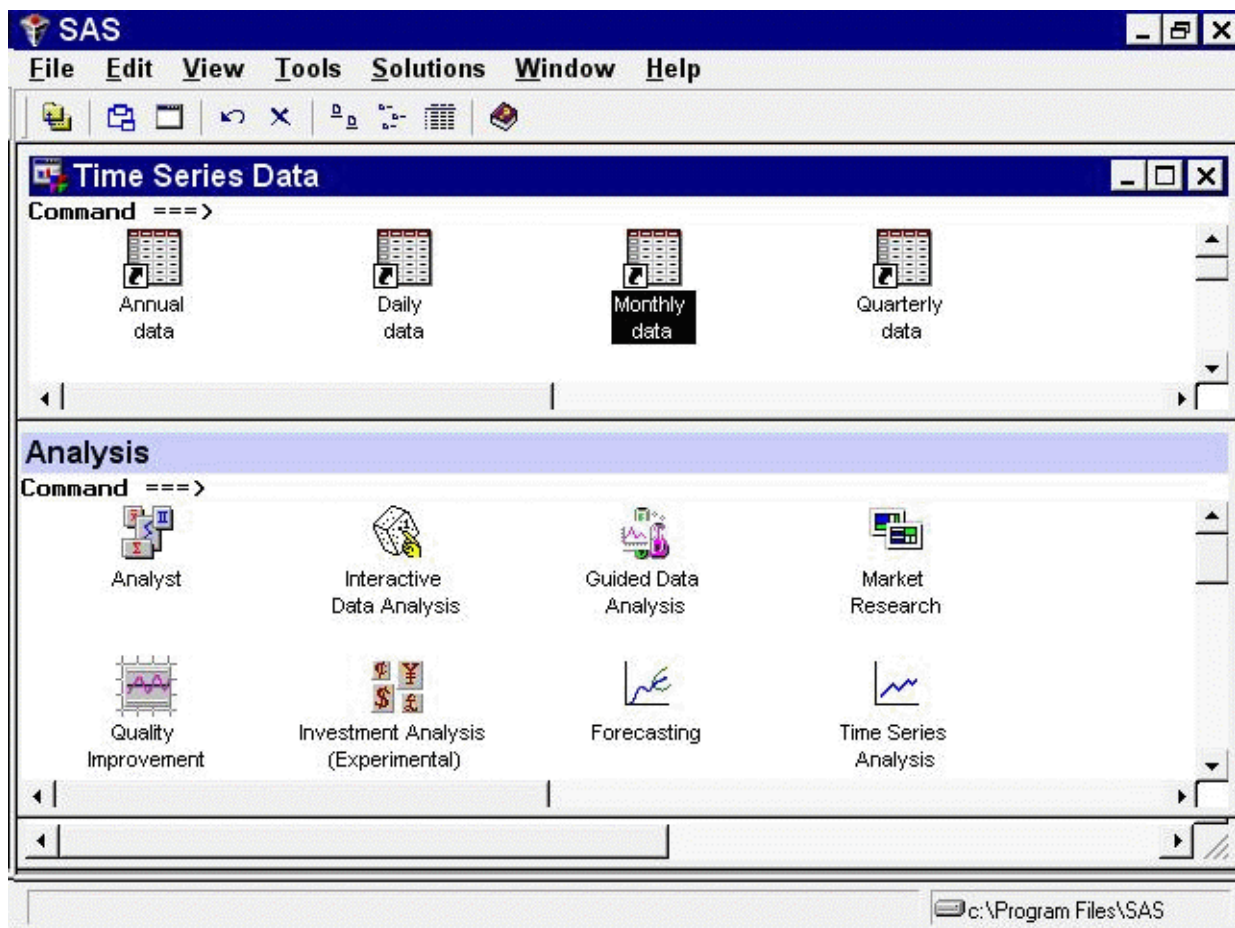
Figure 43.1 Time Series Forecasting System Menu Selection

You can invoke the Forecasting System from the SAS Explorer window by opening an existing forecasting project. By default these projects are stored in the FMSPROJ catalog in the SASUSER library. Select SASUSER in the Explorer to display its contents. Then select FMSPROJ. This catalog is created the first time you use the Forecasting System. If you have saved projects, they appear in the Explorer with the forecasting graph icon, as shown in [Figure 43.2](#). Double-click one of the projects, or select it with the right mouse button and then select Open from the pop-up menu, as shown in the figure. This opens the Forecasting System and opens the selected project.

Figure 43.2 Opening a Project from the Explorer

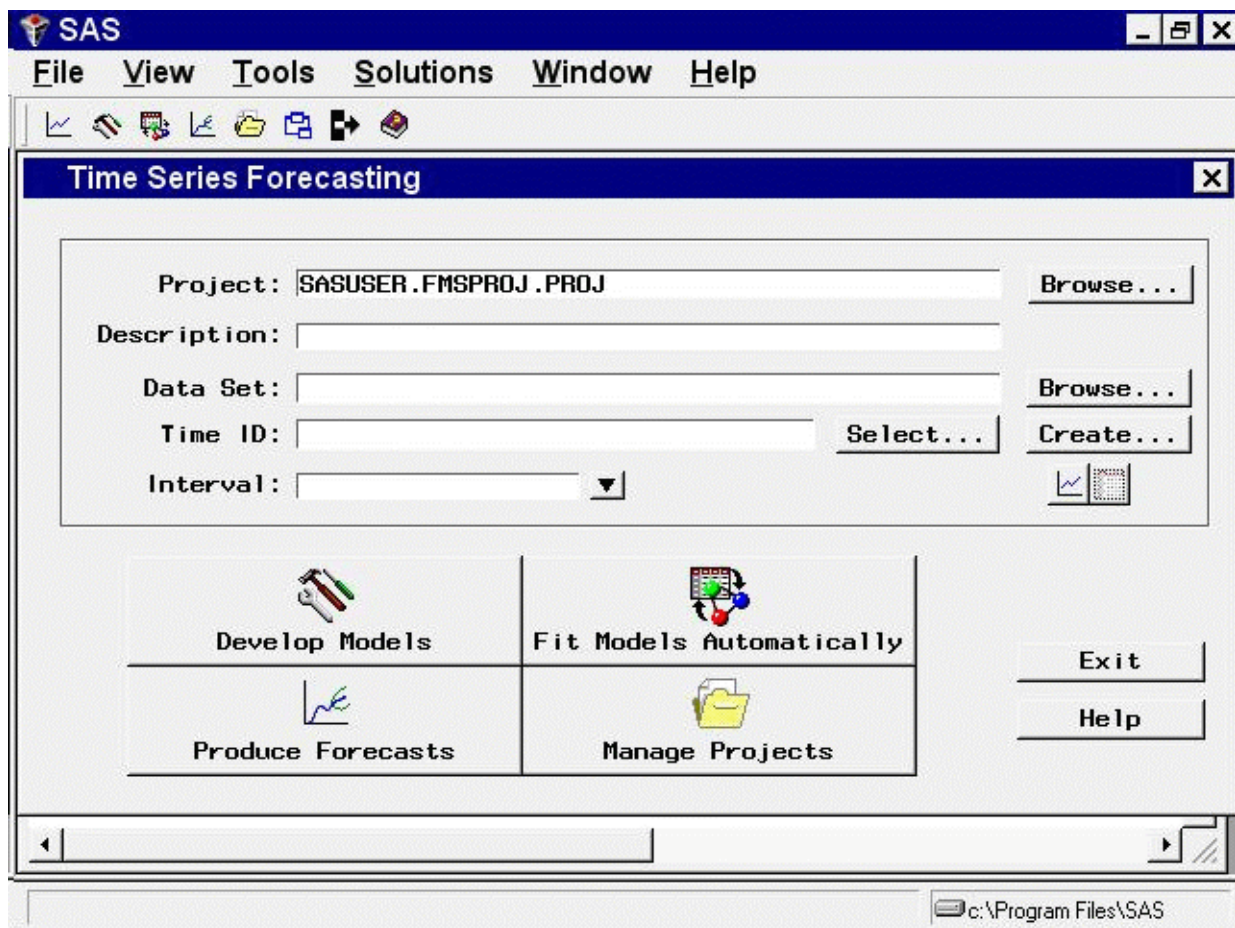


To invoke the Forecasting System in the SAS desktop environment, select the **Solutions** menu from the menu bar, select **Desktop**, and then open the **Analysis** folder. You can run the Time Series Forecasting System or the Time Series Viewer directly, or you can drag and drop. Figure 43.3 illustrates dragging a data set (known as a table in the Desktop environment) and dropping it on the Forecasting icon. In this example, the tables reside in a user-defined folder called *Time Series Data*.

Figure 43.3 Drag and Drop on the SAS Desktop

If you are using SAS/ASSIST software, select the Planning button and then select `Forecasting` from the pop-up menu.

Any of these methods takes you to the Time Series Forecasting window, as shown in [Figure 43.4](#).

Figure 43.4 Time Series Forecasting Window

At the top of the window is a data selection area for specifying a project file and the input data set containing historical data (the known past values) for the time series variables that you want to forecast. This area also contains buttons for opening viewers to explore your input data either graphically, one series at a time, or as a table, one data set at a time.

The Project and Description fields are used to specify a project file for saving and restoring forecasting models created by the system. Using project files is discussed later, and these fields are ignored for now.

The lower part of the window contains six buttons:

Develop Models

opens the Develop Models window, which you use to develop and fit forecasting models interactively for individual time series.

Fit Models Automatically

opens the Automatic Model Fitting window, which you use to search automatically for the best forecasting model for multiple series in the input data set.

Produce Forecasts

opens the Produce Forecasts window, which you use to compute forecasts for all the variables in the input data set for which forecasting models have been fit.

Manage Projects

opens the Manage Forecasting Project window, which lists the time series for which you have fit forecasting models. You can drill down on a series to see the models that have been fit. You can delete series or models from the project, re-evaluate or refit models, and explore models and forecasts graphically or in tabular form.

Exit

exits the Forecasting System.

Help

displays information about the Forecasting System.

Outline of the Forecasting Process

The examples shown in the following sections illustrate the basic process you use with the Forecasting System.

Specify the Input Data Set

Suppose you have a number of *time series*, variables recorded over time, for which you want to forecast future values. The past values of these time series are stored as variables in a SAS data set or data view. The observations of this data set correspond to regular time periods, such as days, weeks, or months. The first step in the forecasting process is to tell the system to use this data set by setting the Data Set field.

If your time series are not in a SAS data set, you must provide a way for the SAS System to access the data. You can use SAS features to read your data into a SAS data set; refer to *SAS Language Reference*. You can use a SAS/ACCESS product to establish a view of data in a database management system; refer to SAS/ACCESS documentation. You can use PROC SQL to create a SAS data view. You can use PROC DATASOURCE to read data from files supplied by supported data vendors; refer to Chapter 12, “[The DATASOURCE Procedure](#),” for more details.

Provide a Valid Time ID Variable

To use the Forecasting System, your data set must be dated: the data set must contain a *time ID variable* that gives the date of each observation. The time ID variable must represent the observation dates with *SAS date values* or with *SAS datetime values* (for hourly data or other frequencies less than a day), or you can use a simple time index.

When SAS date values are used, the ID variable contains dates within the time periods corresponding to the observations. For example, for monthly data, the values for the time ID variable can be the date of the first day of the month corresponding to each observation, or the time ID variable can contain the date of the last day in the month. (Any date within the period serves as the time ID for the observation.)

If your data set already contains a valid time ID variable with SAS date or datetime values, the next step is to specify this time ID variable in the Time ID field. If the time ID variable is named DATE, the system fills in the Time ID field automatically.

If your data set does not contain a time ID, you must add a valid time ID variable before beginning the forecasting process. The Forecasting System provides features that make this easy to do. See Chapter 44, “Creating Time ID Variables,” for details.

Select and Fit a Forecasting Model for Each Series

If you are using the automated model selection feature, the system performs this step for you and chooses a forecasting model for each series automatically. All you need to do is select the Fit Models Automatically button and then select the variables to fit models for.

If you want more control over forecasting model selection, you can select the Develop Models button, select the series you want to forecast, and use the Develop Models window to specify a forecasting model. As part of this process, you can use the Time Series Viewer and Model Viewer graphical tools. Once you have selected a model for the first series, you can select a different series to work with and repeat the model development process until you have created forecasting models for all the series you want to forecast.

The system provides many features to help you choose the best forecasting model for each series. The features of the Develop Models window and graphical viewer tools are introduced in later sections.

Produce the Forecasts

Once a forecasting model has been fit for each series, select the Produce Forecasts button and use the Produce Forecasts window to compute forecast values and store them in a SAS data set.

Save Your Work

If you want only a single forecast, your task is now complete. But you might want to produce updated forecasts later, as more data becomes available. In this case, you want to save the forecasting models you have created, so that you do not need to repeat the model selection and fitting process.

To save your work, fill in the Project field with the name of a SAS catalog member in which the system will store the model information when you exit the system. Later, you will select the same catalog member name when you first enter the Forecasting System, and the model information will be reloaded.

Note that any number of people can work with the same project file. If you are working on a forecasting project as part of a team, you should take care to avoid conflicting updates to the project file by different team members.

Summary

This is the basic outline of how the Forecasting System works. The system offers many other features and options that you might need to use (for example, the time range of the data used to fit models and how far into the future to forecast). These options will become apparent as you work with the Forecasting System.

As an introductory example, the following sections use the Automatic Model Fitting and Produce Forecasts windows to perform automated forecasting of the series in an example data set.

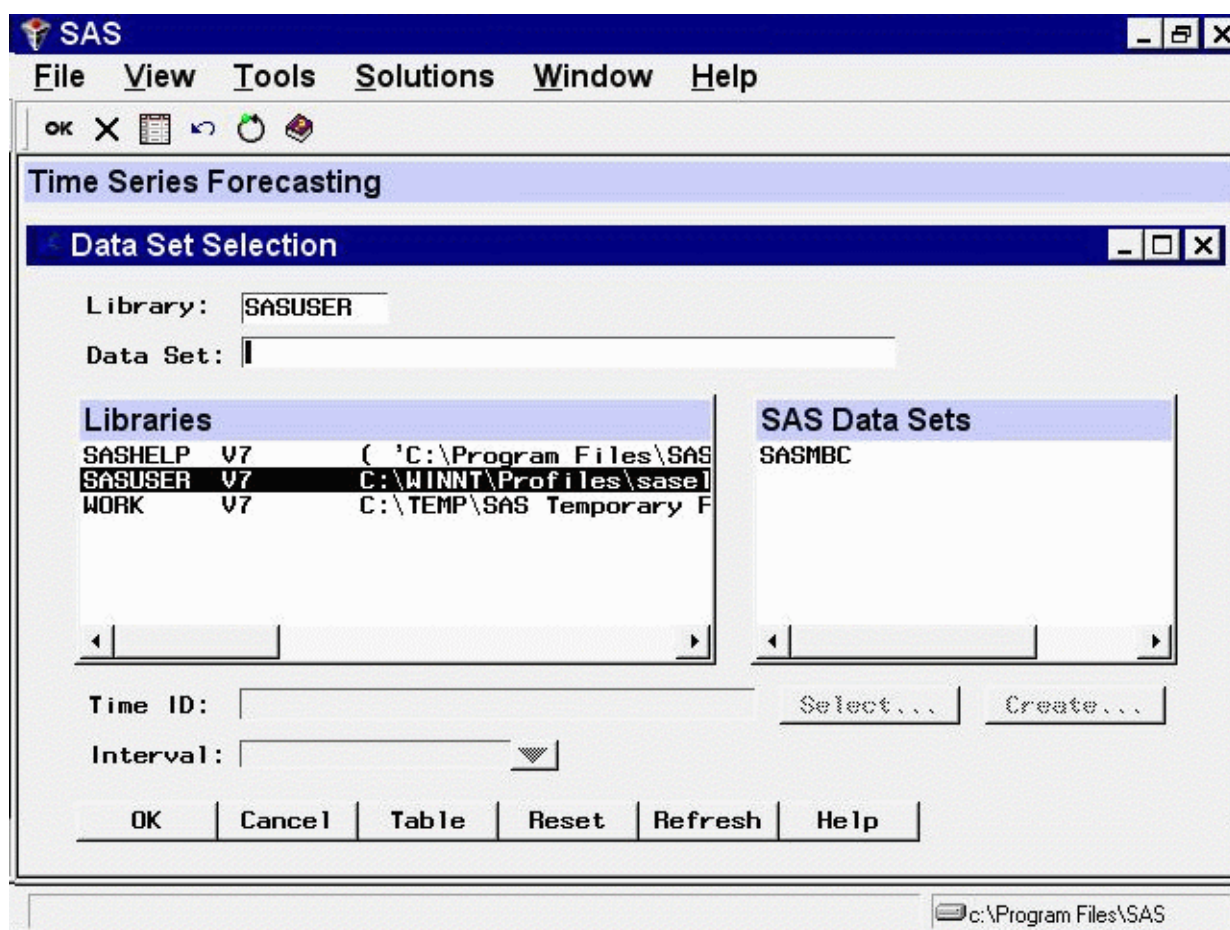
The Input Data Set

As the first step, you must specify the input data set.

The Data Set field in the Time Series Forecasting window gives the name of the input data set containing the time series to forecast. Initially, this field is blank. You can specify the input data set by typing the data set name in this field. Alternatively, you can select the Browse button at the right of the Data Set field to select the data set from a list, as shown in the following section.

The Data Set Selection Window

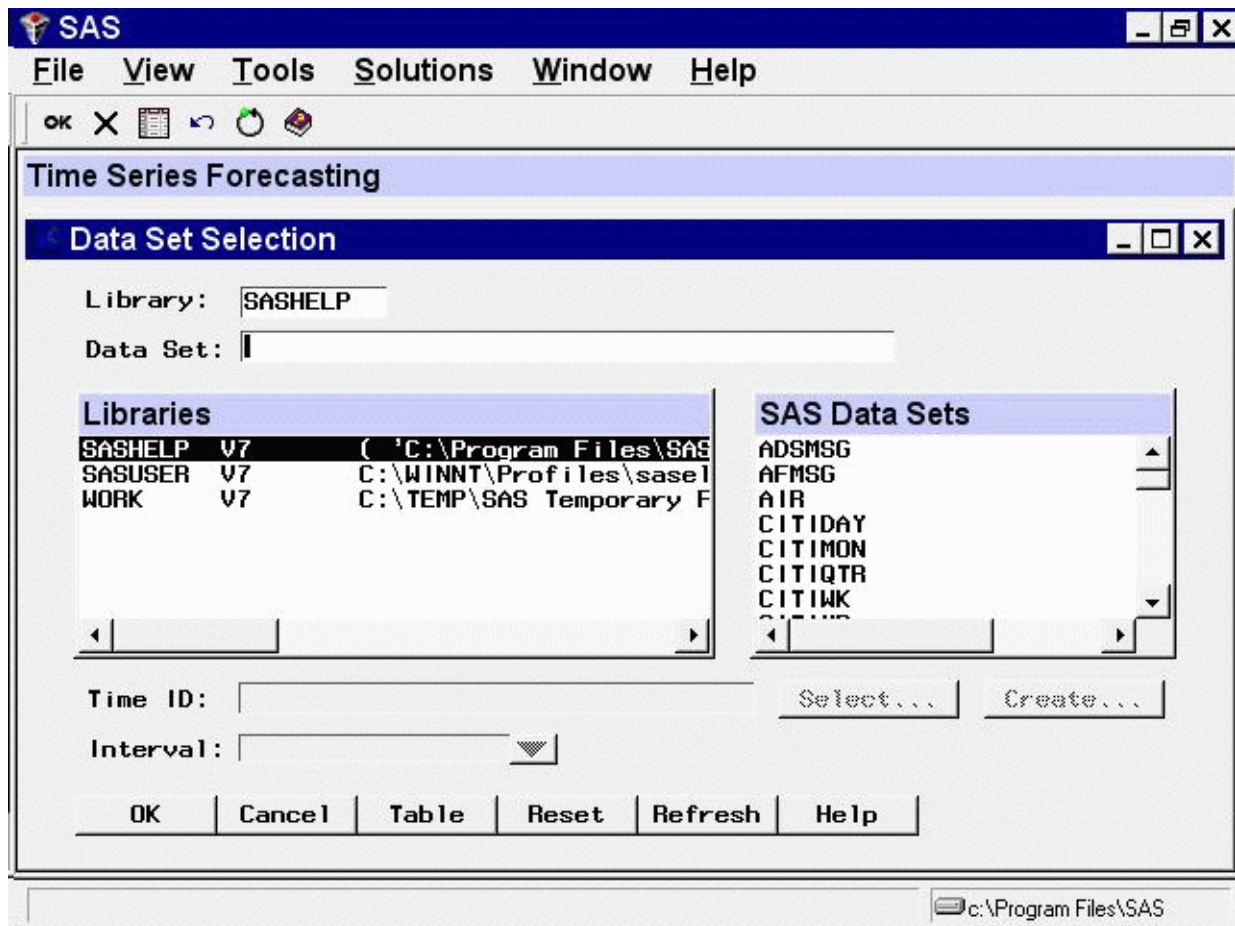
Select the Browse button to the right of the Data Set field. This opens the Data Set Selection window, as shown in [Figure 43.5](#).

Figure 43.5 Data Set Selection Window

The **Libraries** list shows the SAS librefs that are currently allocated in your SAS session. Initially, the **SASUSER** library is selected, and the **SAS Data Sets** list shows the data sets available in your **SASUSER** library.

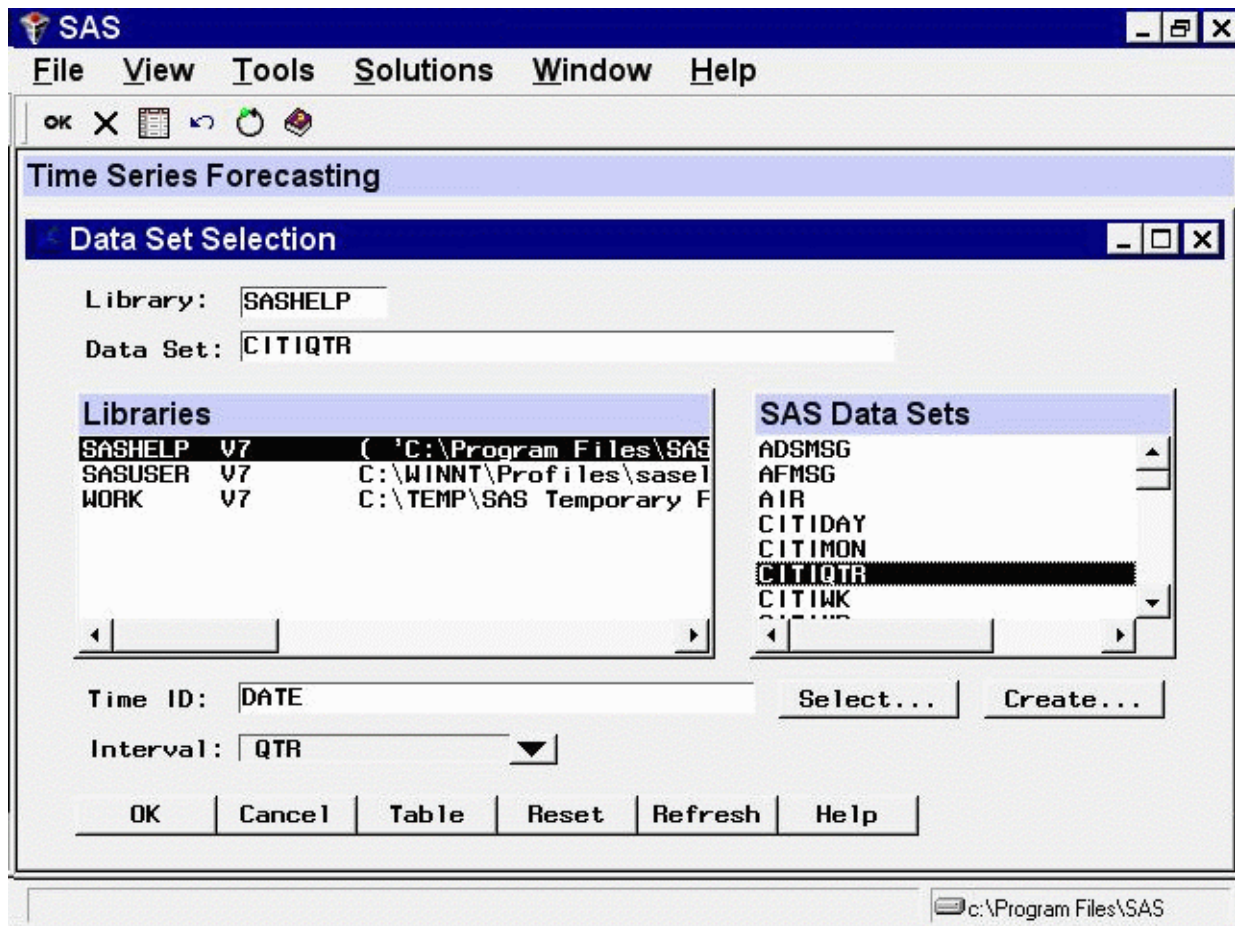
In the **Libraries** list, select the row that starts with **SASHELP**. The Data Set Selection window now lists the data sets in the **SASHELP** library, as shown in [Figure 43.6](#).

Figure 43.6 SASHELP Library



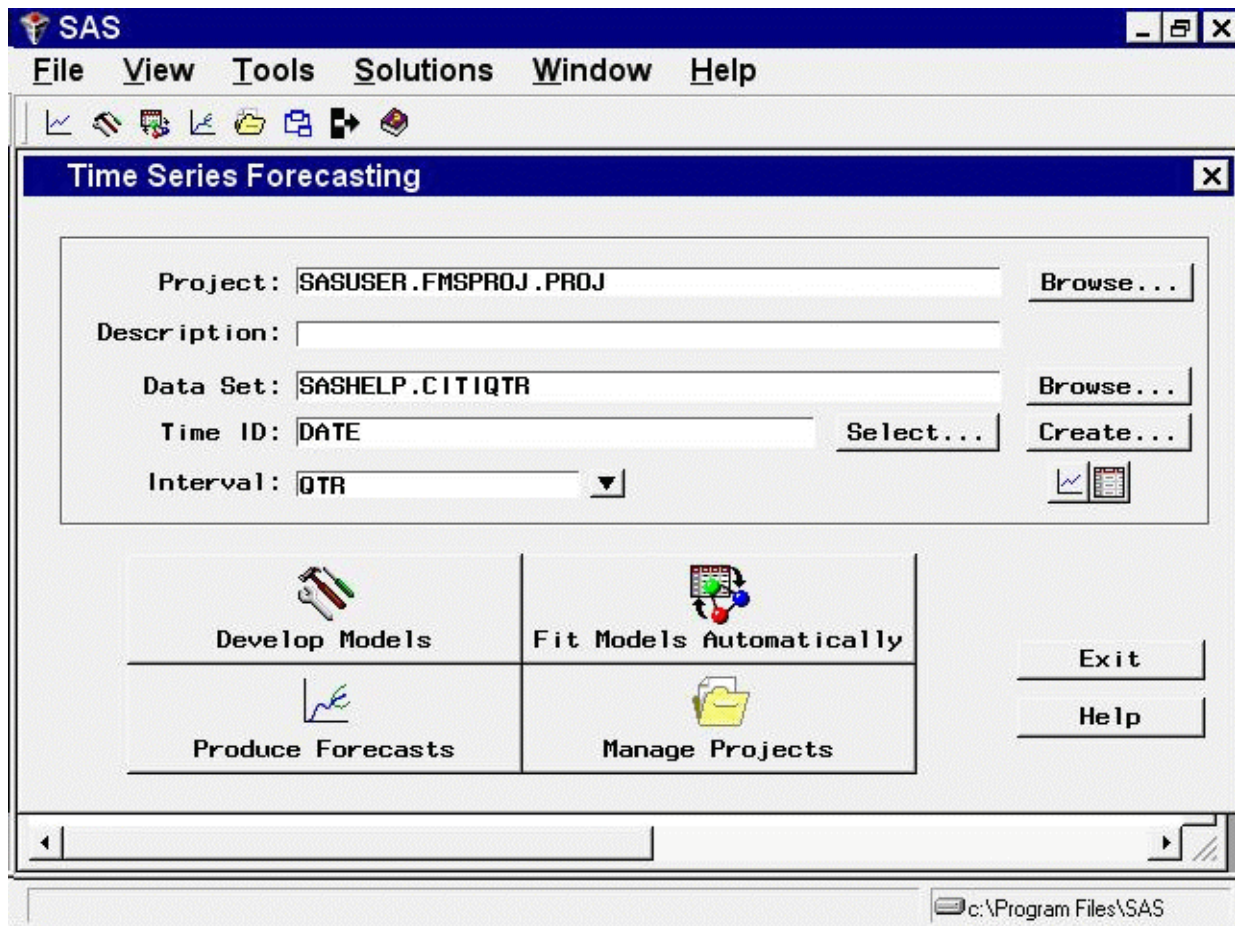
Use the vertical scroll bar on the SAS Data Sets list to scroll down the list until the data set CITIQTR appears. Then select the CITIQTR row. This selects the data set SASHELP.CITIQTR as the input data set.

Figure 43.7 shows the Data Set Selection window after selection of CITIQTR from the SAS Data Sets list.

Figure 43.7 CITIQTR Data Set Selected

Note that the Time ID field is now set to DATE and the Interval field is set to QTR. These fields are explained in the following section.

Now select the OK button to complete selection of the CITIQTR data set. This closes the Data Set Selection window and returns to the Time Series Forecasting window, as shown in [Figure 43.8](#).

Figure 43.8 Time Series Forecasting Window

Time Series Data Sets, ID Variables, and Time Intervals

Before you continue with the example, it is worthwhile to consider how the system determined the values for the Time ID and Interval fields in the Data Set Selection window.

The Forecasting System requires that the input data set contain time series observations, with one observation for each time period. The observations must be sorted in increasing time order, and there must be no gaps in the sequence of observations. The time period of each observation must be identified by an ID variable, which is shown in the Time ID field.

If the data set contains a variable named DATE, TIME, or DATETIME, the system assumes that this variable is the SAS date or datetime valued ID variable, and the Time ID field is filled in automatically. The time ID variable for the SASHELP.CITIQTR data set is named DATE, and therefore the system set the Time ID field to DATE.

If the time ID variable for a data set is not named DATE, TIME, or DATETIME, you must specify the time ID variable name. You can specify the time ID variable either by typing the ID variable name in the Time ID field or by clicking the Select button.

If your data set does not contain a time ID variable with SAS date values, you can add a time ID variable using one of the windows described in Chapter 44, “[Creating Time ID Variables](#).”

Once the time ID variable is known, the Forecasting System examines the ID values to determine the time interval between observations. The data set SASHELP.CITIQTR contains quarterly observations. Therefore, the system determined that the data have a quarterly interval, and set the Interval field to QTR.

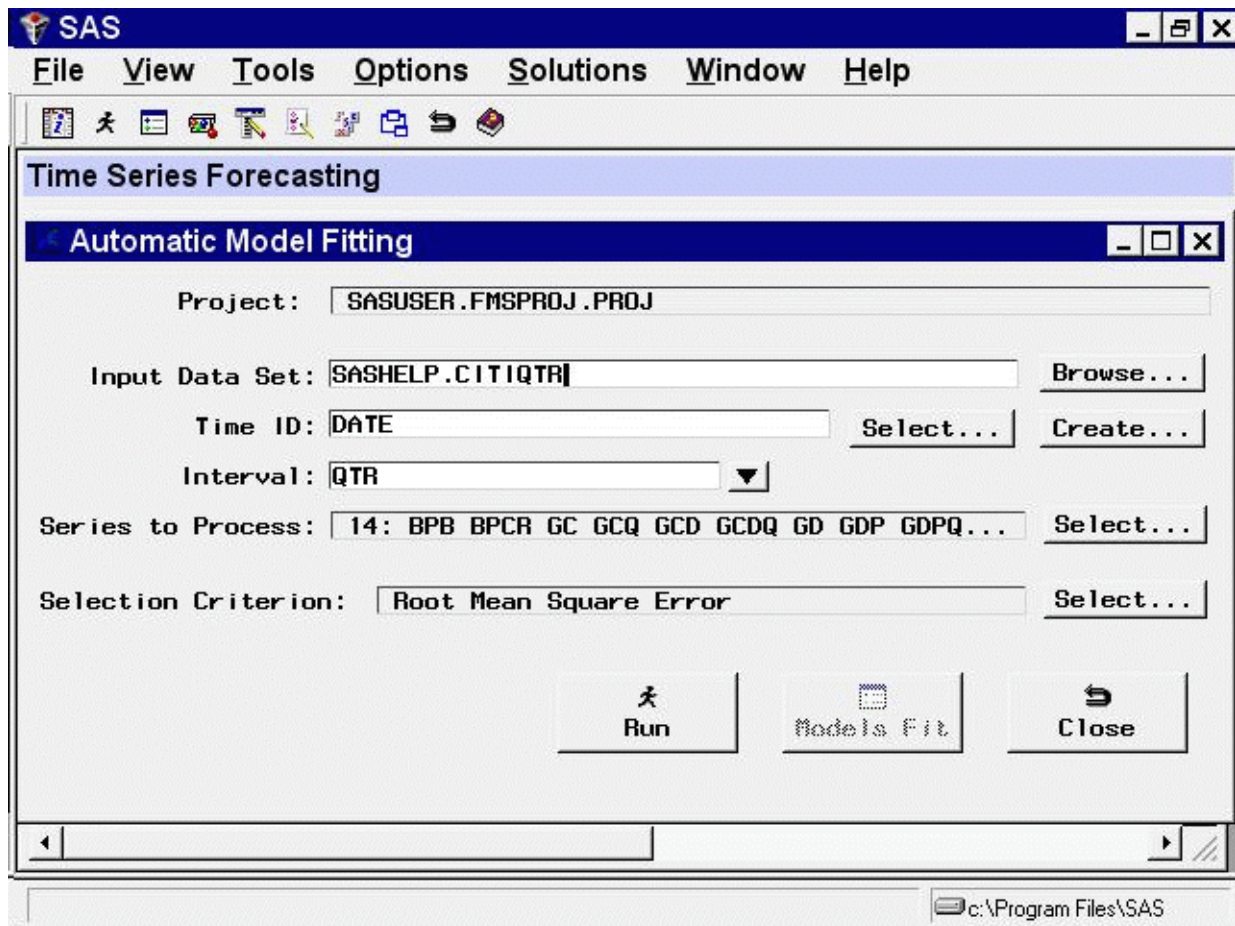
If the system cannot determine the data frequency from the values of the time ID variable, you must specify the time interval between observations. You can specify the time interval by using the `Interval` combo box. In addition to the interval names provided in the pop-up list, you can type in more complex interval names to specify an interval that is a multiple of other intervals or that has date values in the middle of the interval (such as monthly data with time ID values falling on the 10th day of the month).

See Chapter 3, “[Working with Time Series Data](#),” and Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more information about time intervals, SAS date values, and ID variables for time series data sets.

Automatic Model Fitting Window

Before you can produce forecasts, you must fit forecasting models to the time series. Select the Fit Models Automatically button. This opens the Automatic Model Fitting window, as shown in [Figure 43.9](#).

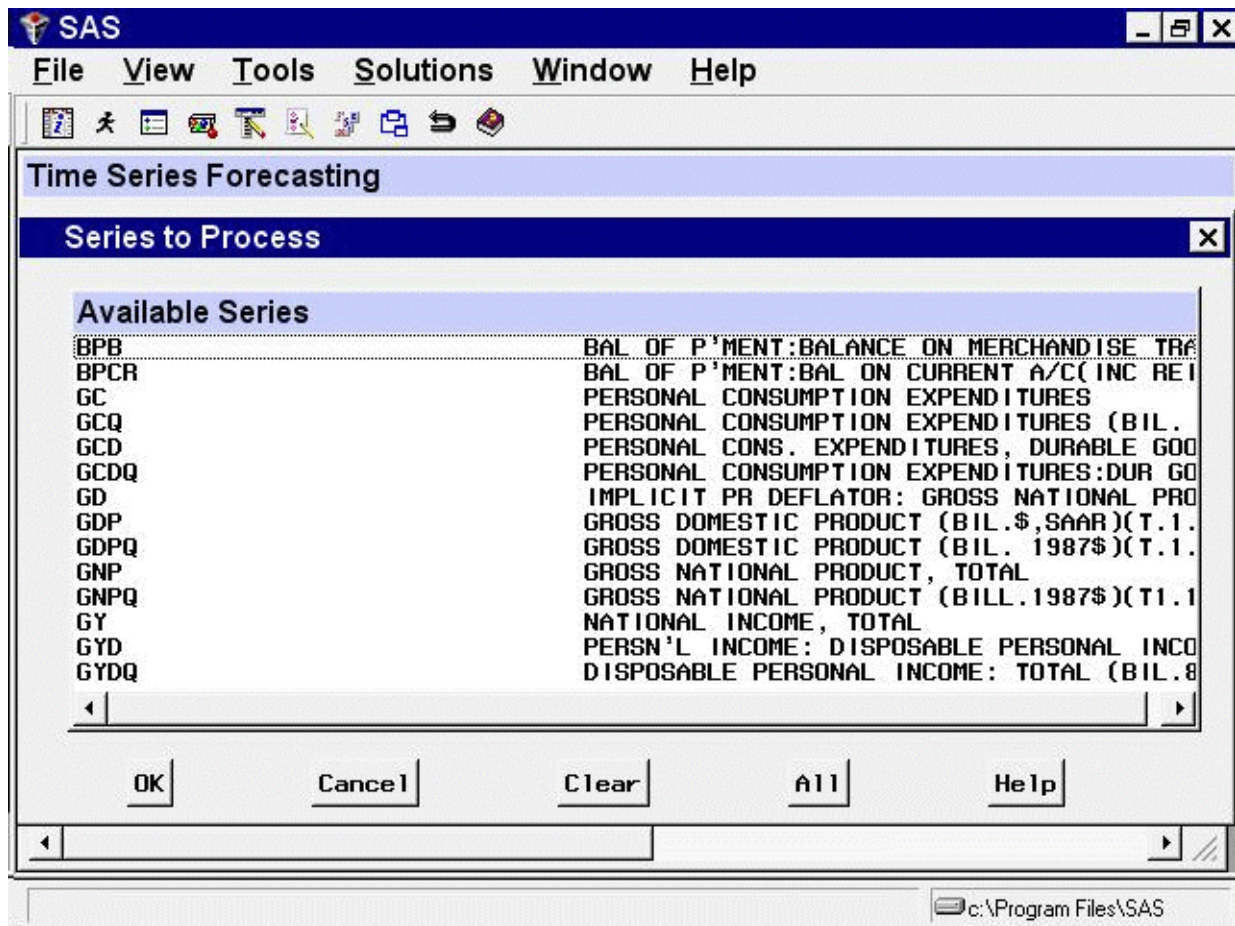
Figure 43.9 Automatic Model Fitting Window



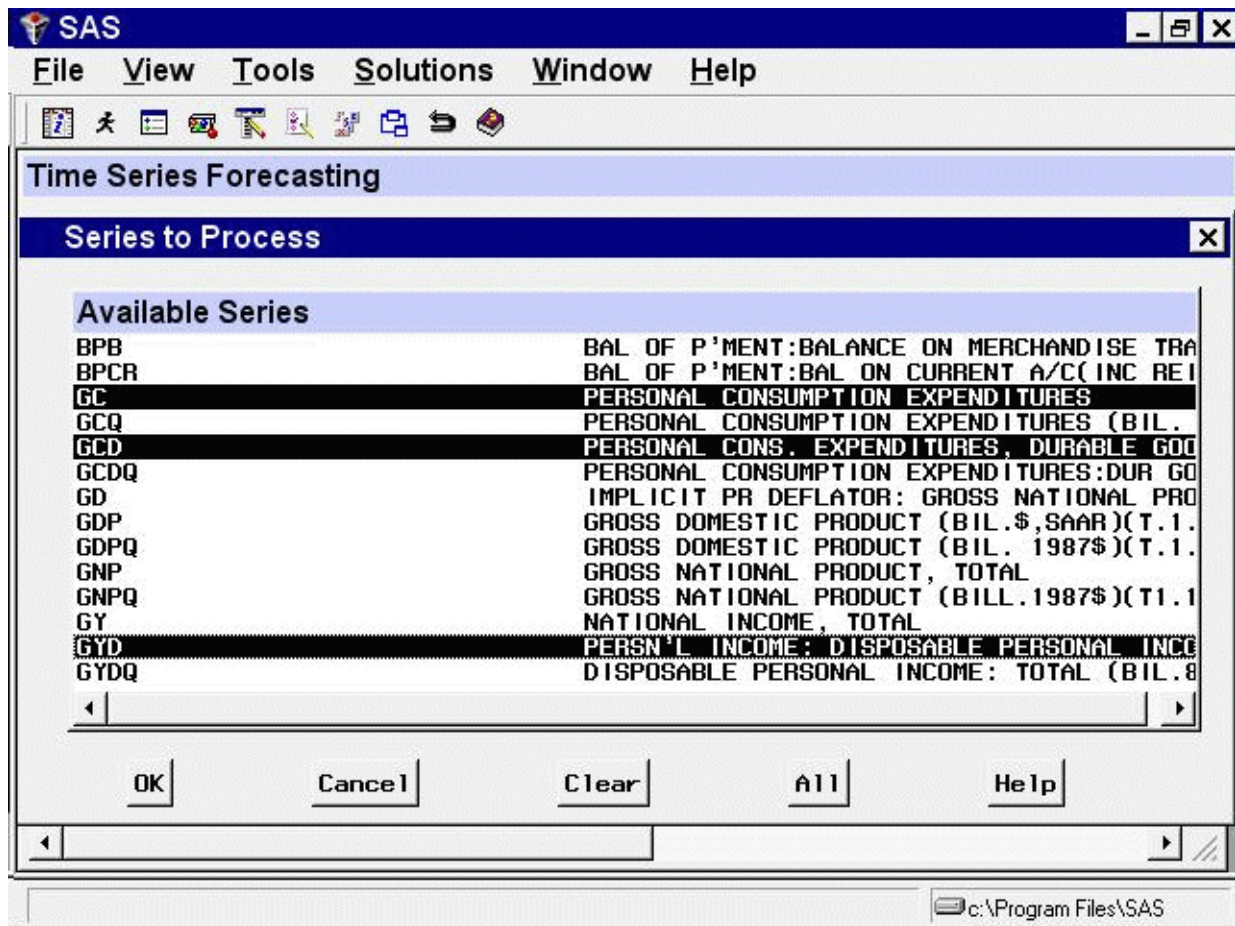
The first part of the Automatic Model Fitting window confirms the project filename and the input data set name.

The Series to Process field shows the number and lists the names of the variables in the input data set to which the Automatic Model Fitting process will be applied. By default, all numeric variables (except the time ID variable) are processed. However, you can specify that models be generated for only a select subset of these variables.

Click the Select button to the right of the Series to Process field. This opens the Series to Process window, as shown in [Figure 43.10](#).

Figure 43.10 Series to Process Window

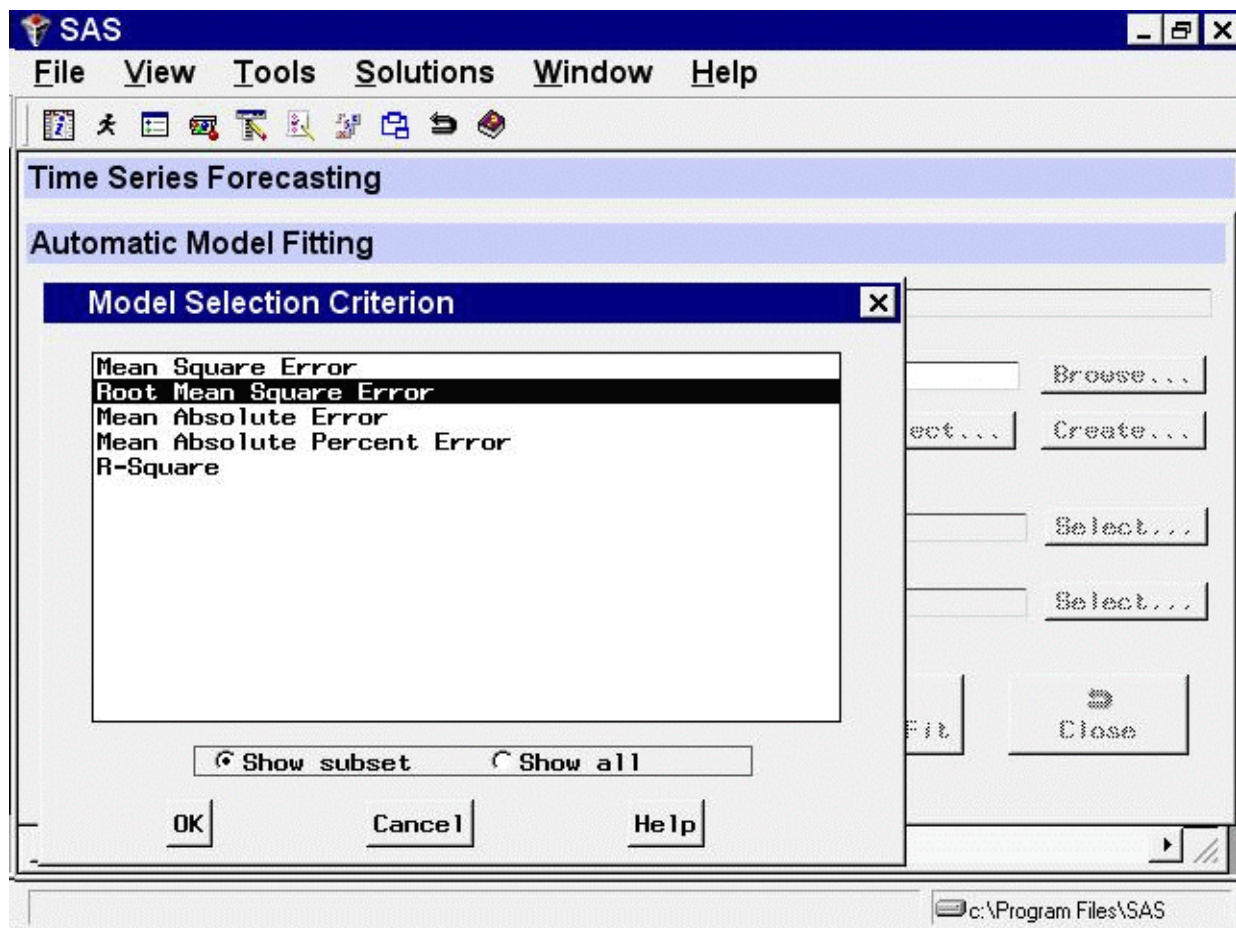
Use the mouse and the CTRL key to select the personal consumption expenditures series (GC), the personal consumption expenditures for durable goods series (GCD), and the disposable personal income series (GYD), as shown in Figure 43.11. (Remember to hold down the CTRL key as you make the selections; otherwise, selecting a second series will deselect the first.)

Figure 43.11 Selecting Series for Automatic Model Fitting

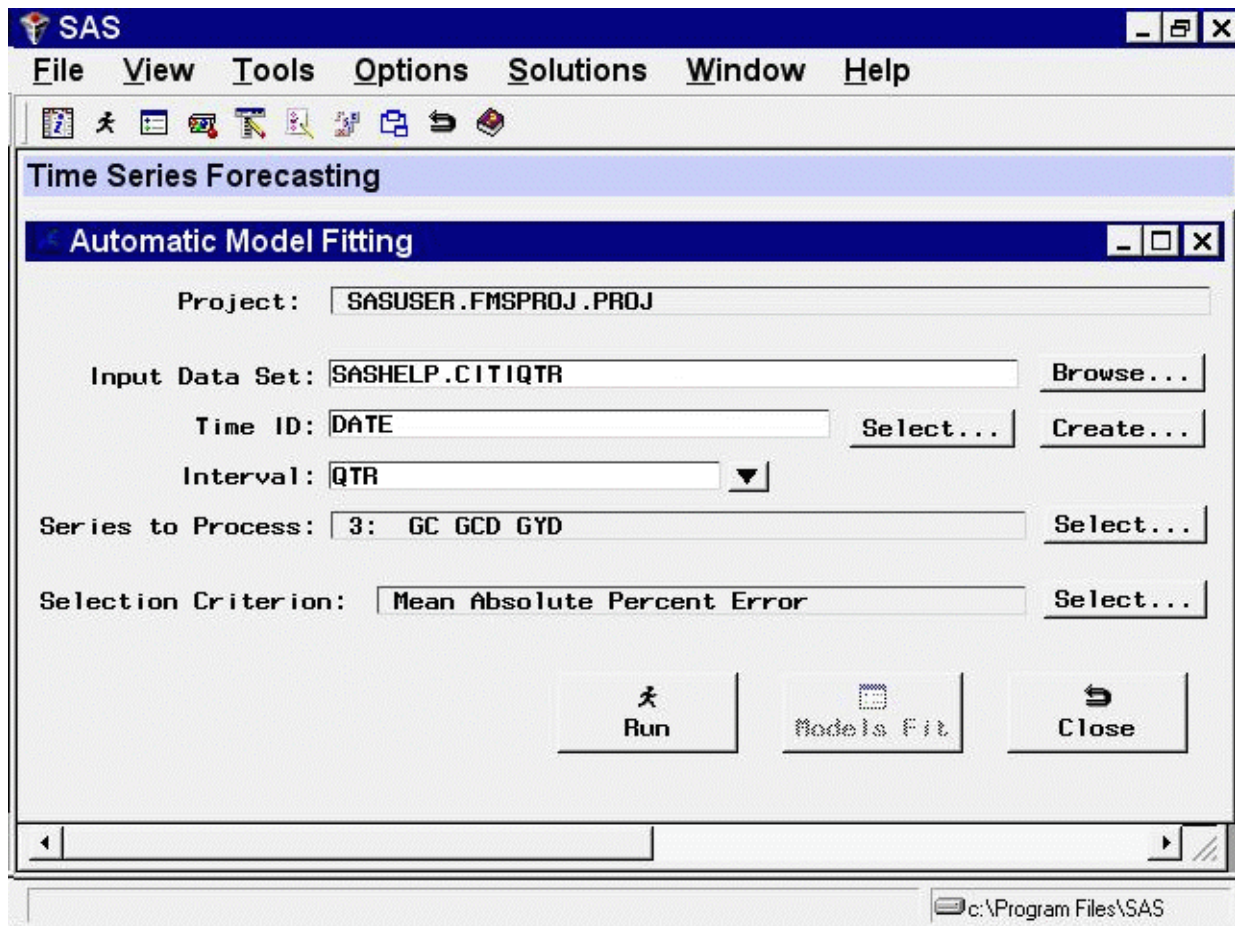
Now select the OK button. This returns you to the Automatic Model Fitting window. The Series to Process field now shows the selected variables.

The Selection Criterion field shows the goodness-of-fit measure that the Forecasting System will use to select the best fitting model for each series. By default, the selection criterion is the root mean squared error. To illustrate how you can control the selection criterion, this example uses the mean absolute percent error to select the best fitting models.

Click the Select button to the right of the Selection Criterion field. This opens a list of statistics of fit, as shown in Figure 43.12.

Figure 43.12 Choosing the Model Selection Criterion

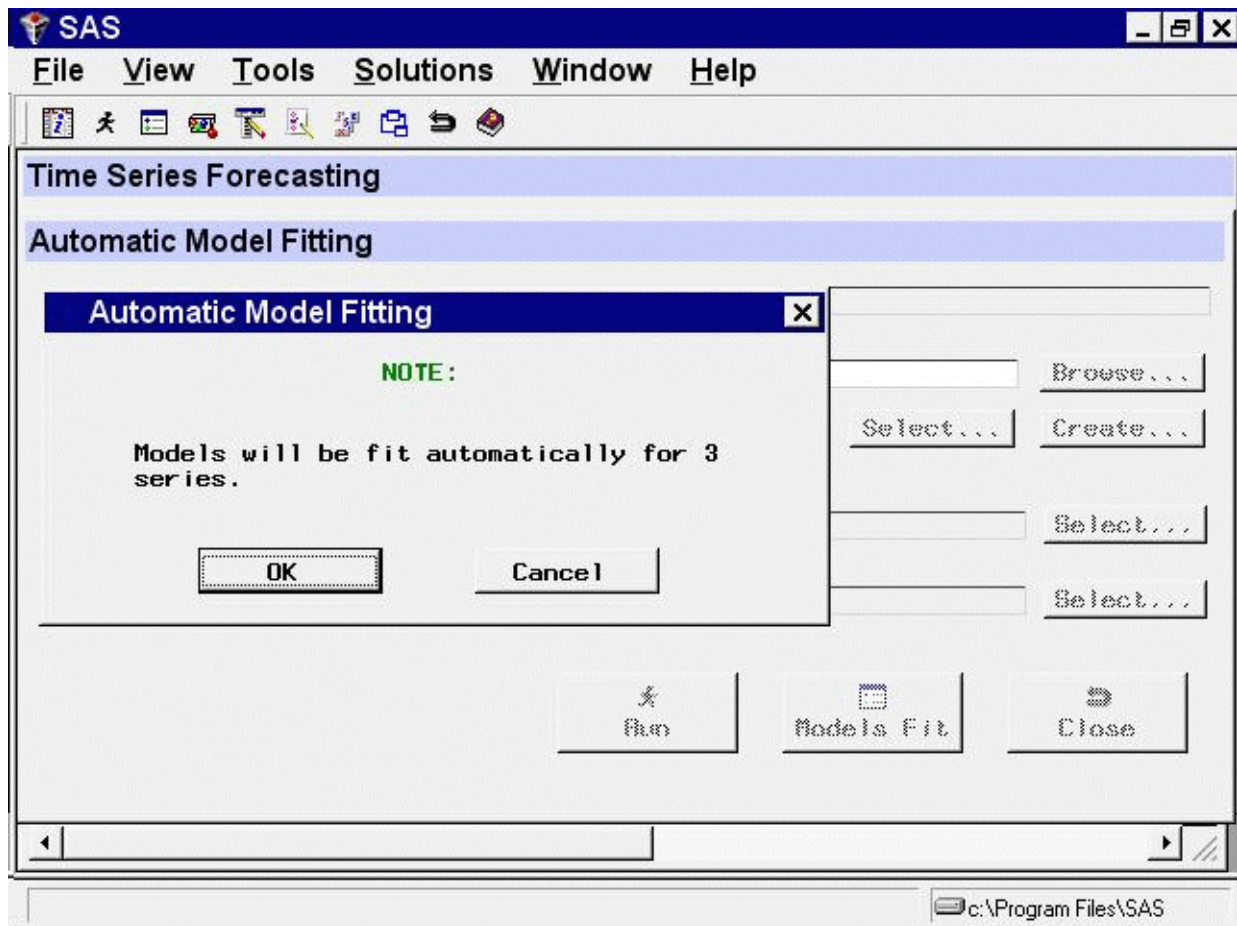
Select *Mean Absolute Percent Error* and then select the OK button. The Automatic Model Fitting window now appears as shown in [Figure 43.13](#).

Figure 43.13 Automatic Model Fitting Window

Now that all the options are set appropriately, select the Run button.

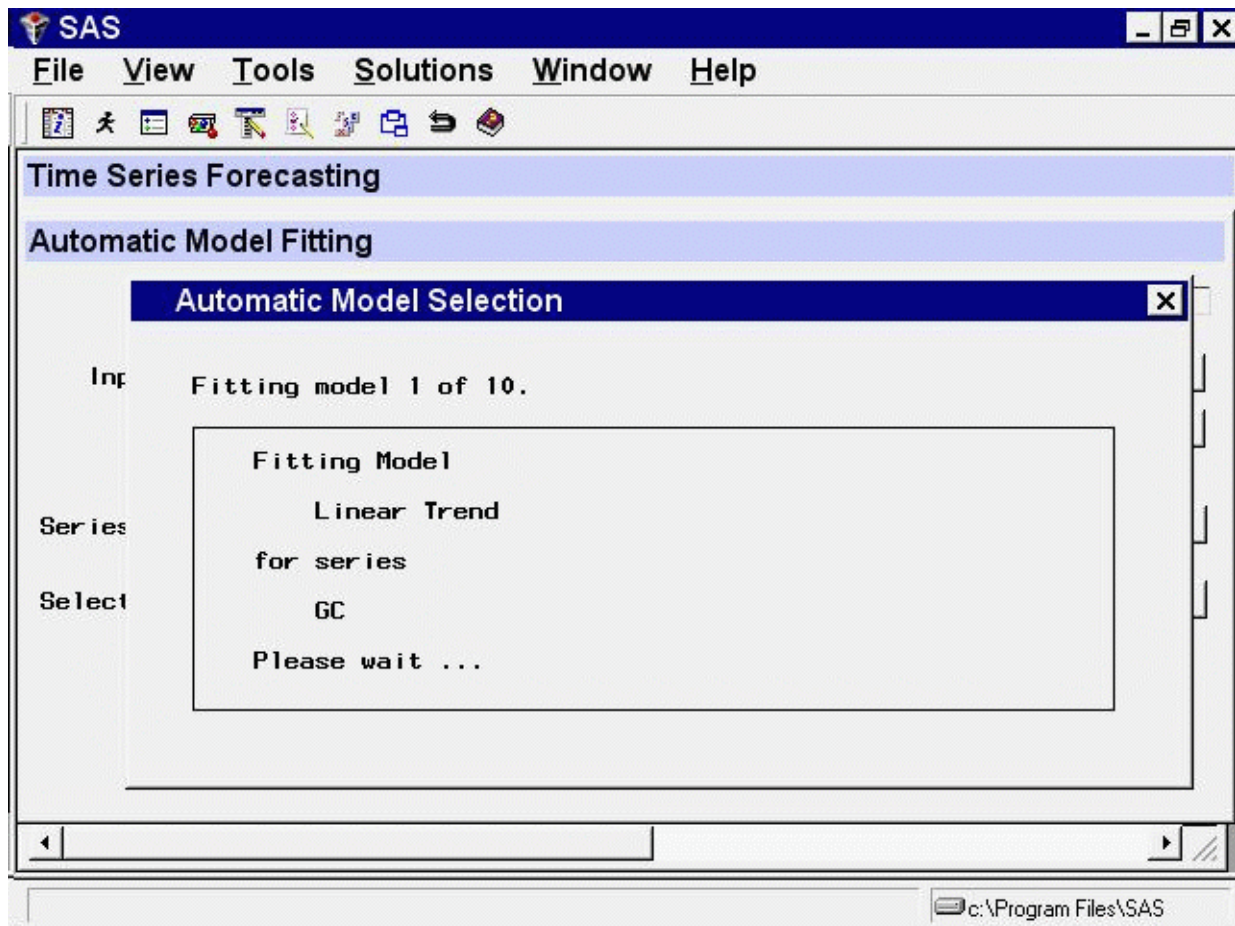
The Forecasting System now displays a notice, shown in [Figure 43.14](#), confirming that models will be fit for three series using the automatic forecasting model search feature. This prompt is displayed because it is possible to fit models for a large number of series at once, which might take a lot of time. So the system gives you a chance to cancel if you accidentally ask to fit models for more series than you intended. Select the OK button.

Figure 43.14 Automatic Model Fitting Note



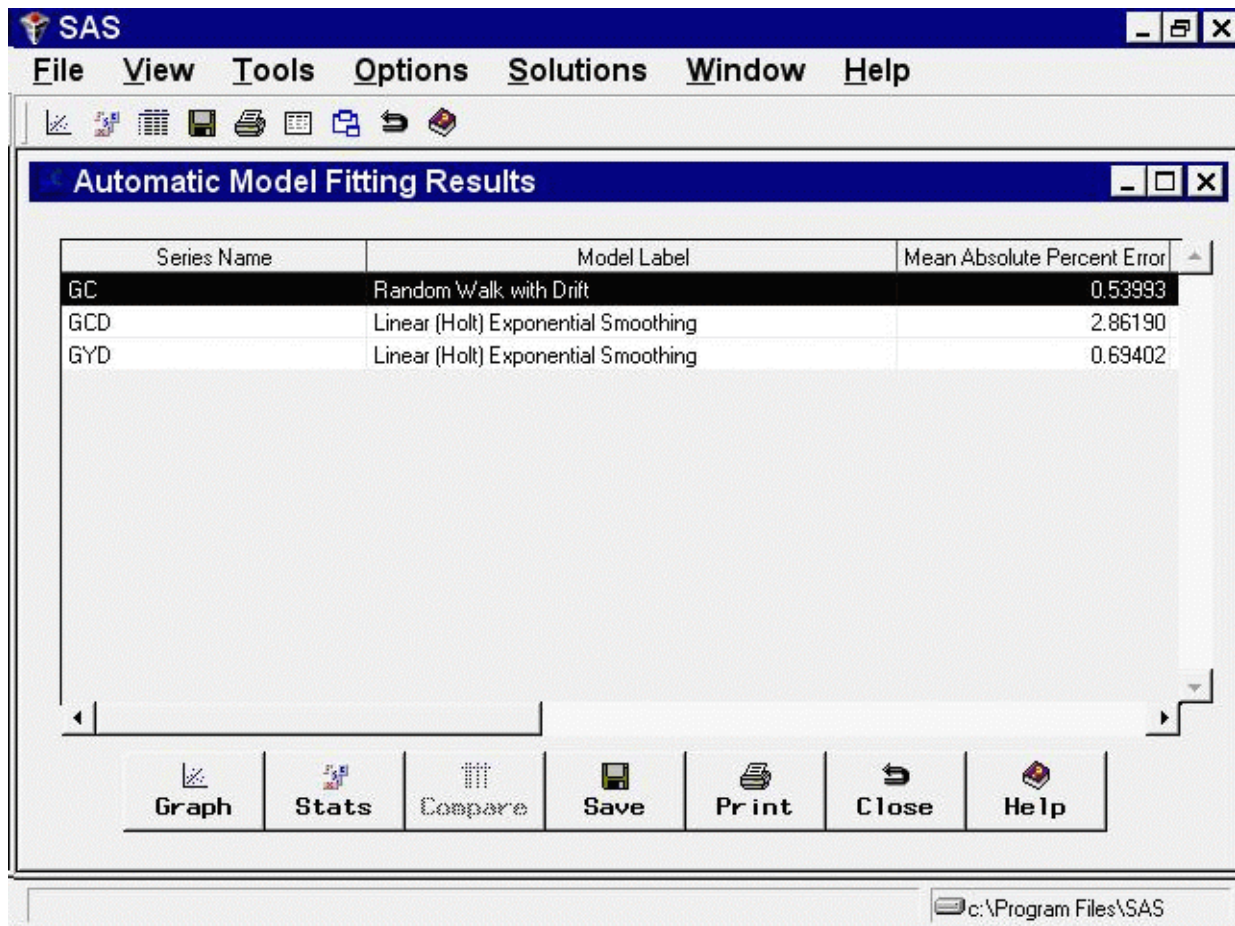
The system now fits several forecasting models to each of the three series you selected. While the models are being fit, the Forecasting System displays notices indicating what it is doing so that you can observe its progress, as shown in [Figure 43.15](#).

Figure 43.15 “Working” Notice



For each series, the system saves the model that produces the smallest mean absolute percent error. You can have the system save all the models fit by selecting *Automatic Fit* from the Options menu.

After the Automatic Model Fitting process has completed, the results are displayed in the Automatic Model Fitting Results window, as shown in [Figure 43.16](#).

Figure 43.16 Automatic Model Fitting Results

This resizable window shows the list of series names and descriptive labels for the forecasting models chosen for them, as well as the values of the model selection criterion and other statistics of fit. Select the Close button.

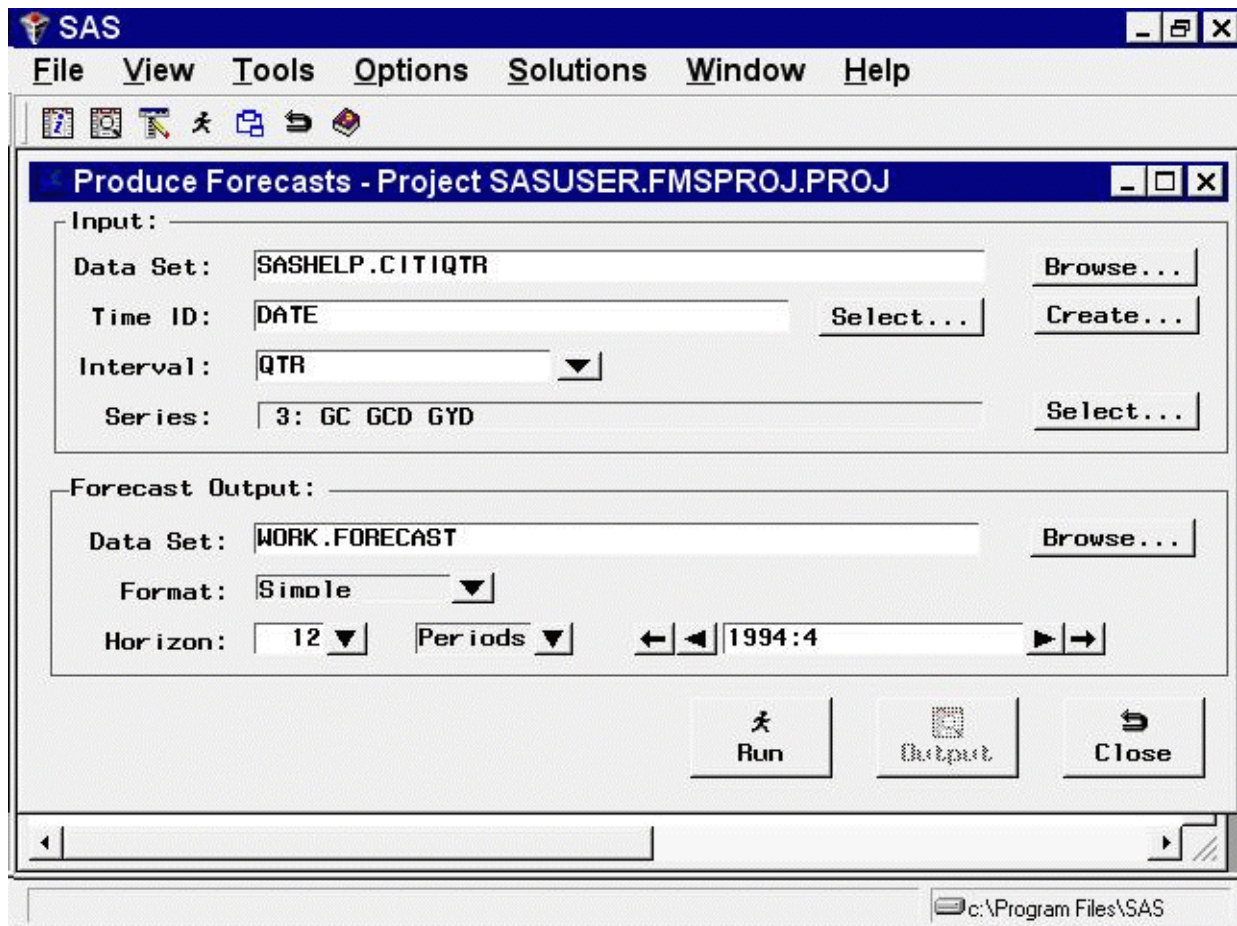
This returns you to the Automatic Model Fitting window. You can now fit models for other series in this data set or change to a different data set and fit models for series in the new data set.

Select the Close button to return to the Time Series Forecasting window.

Produce Forecasts Window

Now that you have forecasting models for these three series, you are ready to produce forecasts. Select the Produce Forecasts button. This opens the Produce Forecasts window, as shown in [Figure 43.17](#).

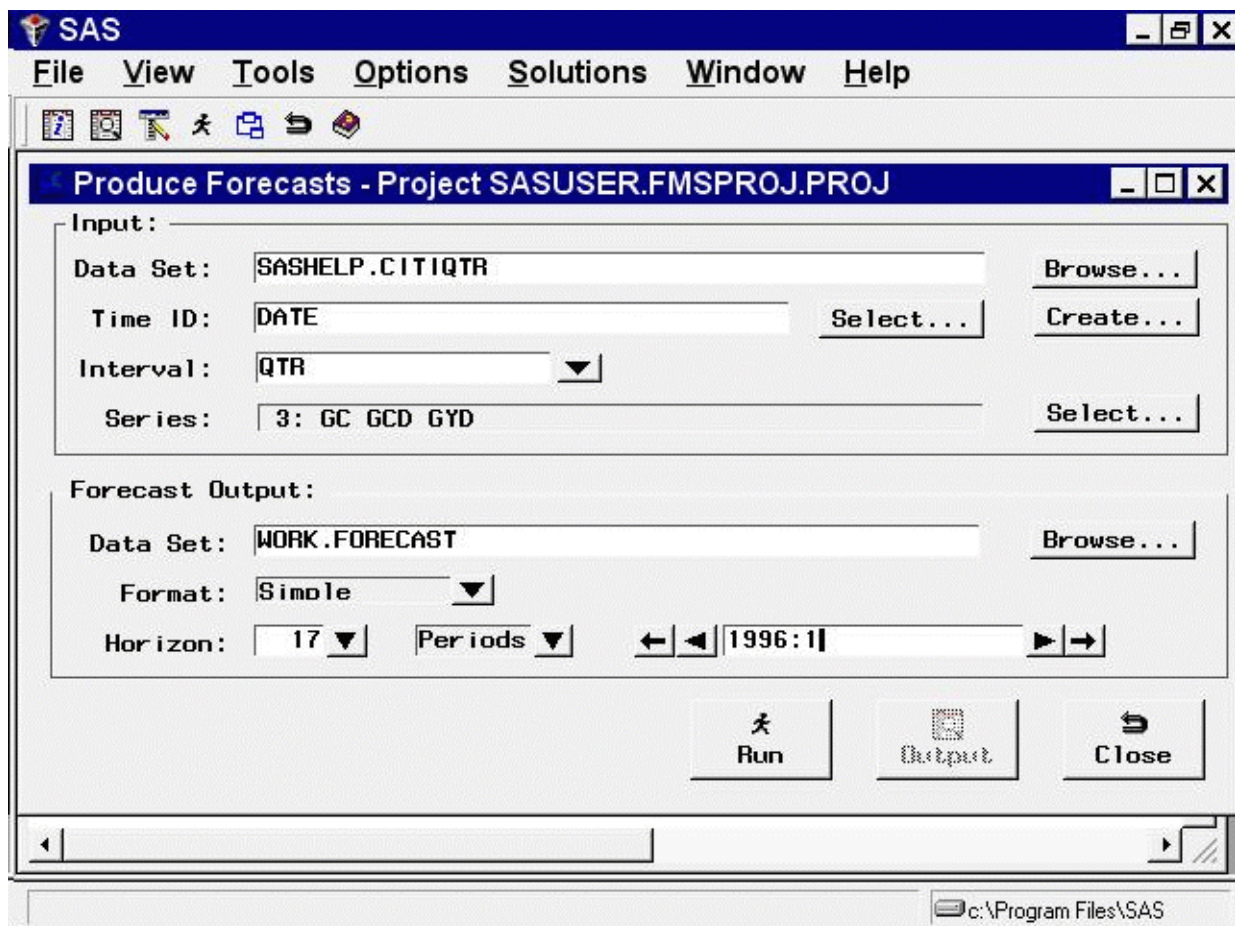
Figure 43.17 Produce Forecasts Window



The Produce Forecasts window shows the input data set information and indicates the variables in the input data set for which forecasting models exist. Forecasts will be produced for these series. If you want to produce forecasts for only some of these series, use the Select button at the right of the Series field to select the series to forecast. The Data Set field in the Forecast Output box contains the name of the SAS data set in which the system will store the forecasts. The default output data set is WORK.FORECAST.

You can set the forecast horizon by using the controls on the line labeled Horizon. The default horizon is 12 periods. You can change it by specifying the number of periods, number of years, or the date of the last forecast period. Position the cursor in the date field and change the forecast ending date to 1 January 1996 by typing jan1996 and pressing the ENTER key.

The window now appears as shown in [Figure 43.18](#).

Figure 43.18 Produce Forecasts Window

Now select the Run button to produce the forecasts. The system indicates that the forecasts have been stored in the output data set. Select OK to dismiss the notice.

The Forecast Data Set

The Forecasting System can save the forecasts to a SAS data set in three different formats. Depending on your needs, you might find one of these output formats more convenient. The output data set format is controlled by the `Format` combo box. You can select the following output formats. The simple format is the default.

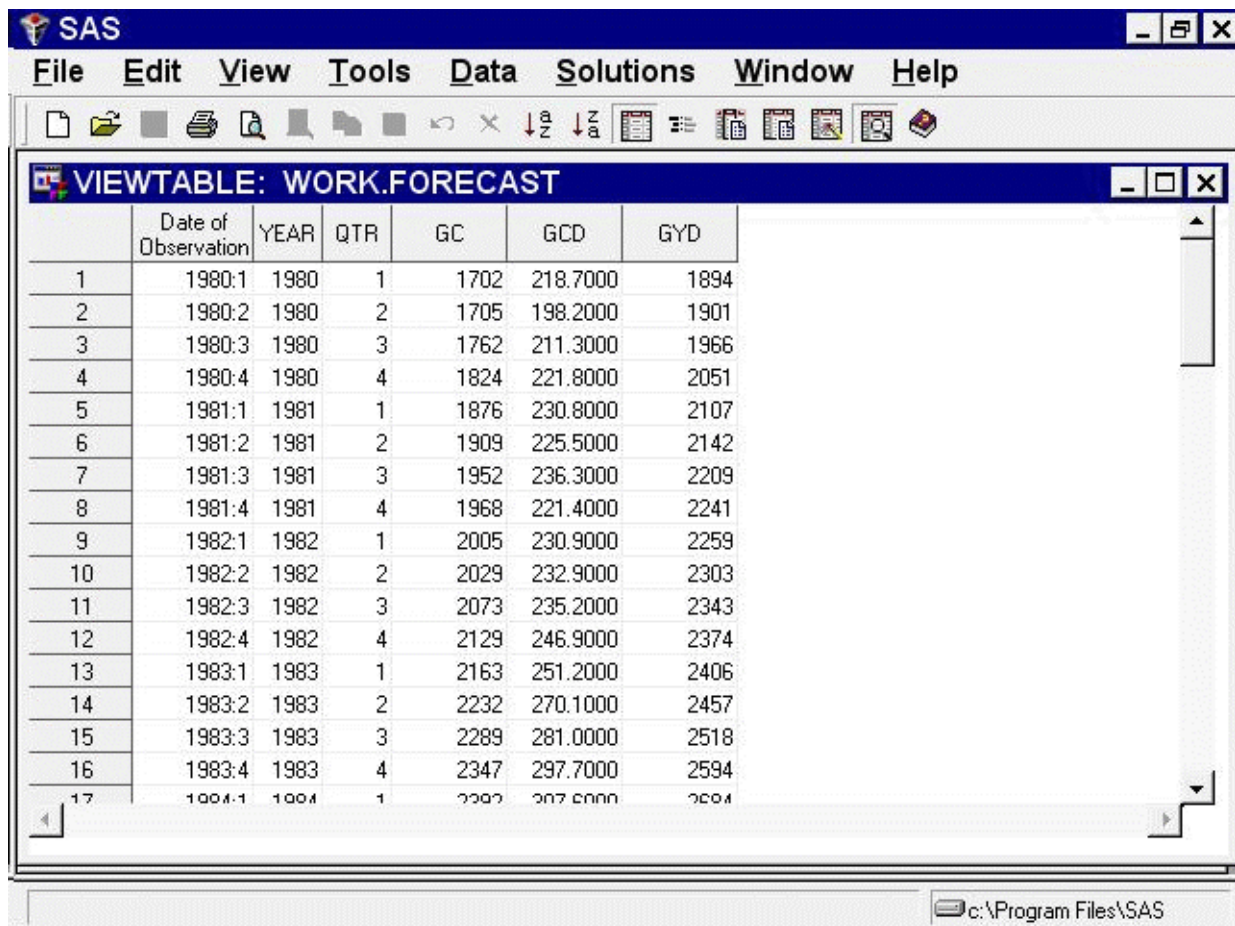
Simple	The data set contains time ID variables and the forecast variables, and it contains one observation per time period. Observations for earlier time periods contain actual values copied from the input data set; later observations contain the forecasts.
Interleaved	The data set contains time ID variables, the variable <code>TYPE</code> , and the forecast variables. There are several observations per time period, with the meaning of each observation identified by the <code>TYPE</code> variable.

Concatenated The data set contains the variable **SERIES**, time ID variables, and the variables **ACTUAL**, **PREDICT**, **ERROR**, **UPPER**, **LOWER**, and **STD**. There is one observation per time period per forecast series. The variable **SERIES** contains the name of the forecast series, and the data set is sorted by **SERIES** and **DATE**.

Simple Format Forecast Data Set

To see the simple format forecast data set that the system created, select the **Output** button. This opens a **VIEWTABLE** window to display the data set, as shown in [Figure 43.19](#).

Figure 43.19 Forecast Data Set—Simple Format



The screenshot shows the SAS VIEWTABLE: WORK.FORECAST window. The table contains 17 observations with columns for Date of Observation, YEAR, QTR, GC, GCD, and GYD. The data represents quarterly forecasts from 1980 to 1984.

	Date of Observation	YEAR	QTR	GC	GCD	GYD
1	1980:1	1980	1	1702	218.7000	1894
2	1980:2	1980	2	1705	198.2000	1901
3	1980:3	1980	3	1762	211.3000	1966
4	1980:4	1980	4	1824	221.8000	2051
5	1981:1	1981	1	1876	230.8000	2107
6	1981:2	1981	2	1909	225.5000	2142
7	1981:3	1981	3	1952	236.3000	2209
8	1981:4	1981	4	1968	221.4000	2241
9	1982:1	1982	1	2005	230.9000	2259
10	1982:2	1982	2	2029	232.9000	2303
11	1982:3	1982	3	2073	235.2000	2343
12	1982:4	1982	4	2129	246.9000	2374
13	1983:1	1983	1	2163	251.2000	2406
14	1983:2	1983	2	2232	270.1000	2457
15	1983:3	1983	3	2289	281.0000	2518
16	1983:4	1983	4	2347	297.7000	2594
17	1984:1	1984	1	2397	307.6000	2694

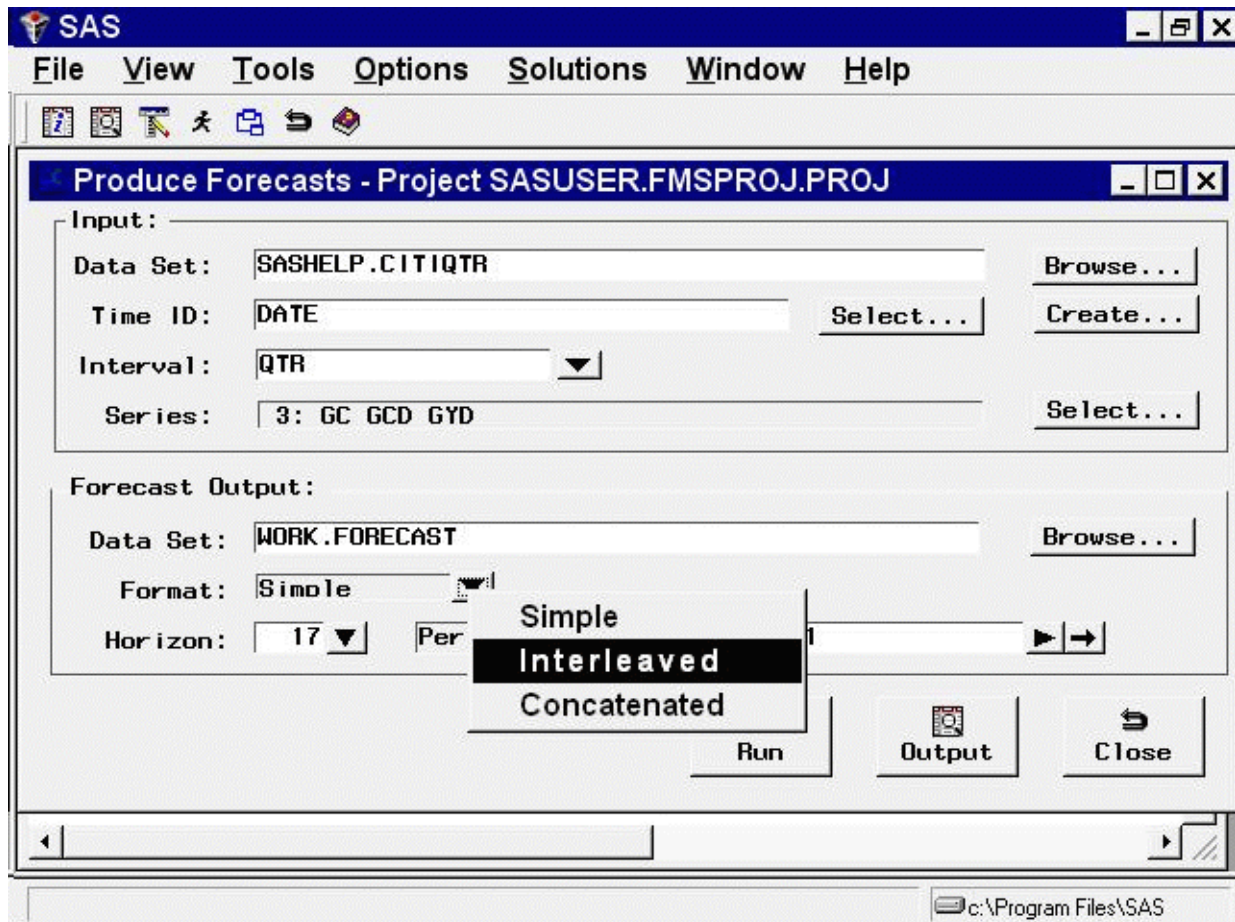
[Figure 43.19](#) shows the default simple format. This form of the forecast data set contains time ID variables and the variables that you forecast. The forecast variables contain actual values or predicted values, depending on whether the date of the observation is within the range of data supplied in the input data set.

Select **File** and **Close** to close the Viewtable window.

Interleaved Format Forecast Data Set

From the Produce Forecasts window, use the list to select the *Interleaved* format, as shown in Figure 43.20.

Figure 43.20 Forecast Data Set Options



Now select the Run button again. The system presents a warning notice reminding you that the data set WORK.FORECAST already exists and asking if you want to replace it. Select *Replace*.

The forecasts are stored in the data set WORK.FORECAST again, this time in the *Interleaved* format. Dismiss the notice that the forecast was stored.

Now select the Output button again. This opens a Viewtable window to display the data set, as shown in Figure 43.21.

Figure 43.21 Forecast Data Set—Interleaved Format

	Date of Observation	YEAR	QTR	Type of Observation	GC	GCD	GYD
1	1980:1	1980	1	ACTUAL	1702	218.7000	1894
2	1980:1	1980	1	ERROR	.	8.3333	0.2423
3	1980:1	1980	1	LOWER	.	185.7776	1843
4	1980:1	1980	1	PREDICT	.	210.3667	1893
5	1980:1	1980	1	STD	.	12.5457	25.9165
6	1980:1	1980	1	UPPER	.	234.9558	1944
7	1980:2	1980	2	ACTUAL	1705	198.2000	1901
8	1980:2	1980	2	ERROR	-44.1085	-21.5633	-44.2337
9	1980:2	1980	2	LOWER	1715	195.1742	1895
10	1980:2	1980	2	PREDICT	1749	219.7633	1945
11	1980:2	1980	2	STD	17.5899	12.5457	25.9165
12	1980:2	1980	2	UPPER	1783	244.3524	1996
13	1980:3	1980	3	ACTUAL	1762	211.3000	1966
14	1980:3	1980	3	ERROR	9.8915	3.2521	13.1664
15	1980:3	1980	3	LOWER	1718	183.4588	1902
16	1980:3	1980	3	PREDICT	1752	208.0479	1953
17	1980:3	1980	3	STD	17.5899	12.5457	25.9165

NOTE: Table has been opened in browse mode.

c:\Program Files\SAS

In the interleaved format, there are several output observations for each input observation, identified by the TYPE variable. The values of the forecast variables for observations with different TYPE values are as follows.

ACTUAL	actual values copied from the input data set
ERROR	the difference between the actual and predicted values
LOWER	the lower confidence limits
PREDICT	the predicted values from the forecasting model. These are within-sample, one-step-ahead predictions for observations within the historical period, or multistep predictions for observations within the forecast period.
STD	the estimated standard deviations of the prediction errors
UPPER	the upper confidence limits

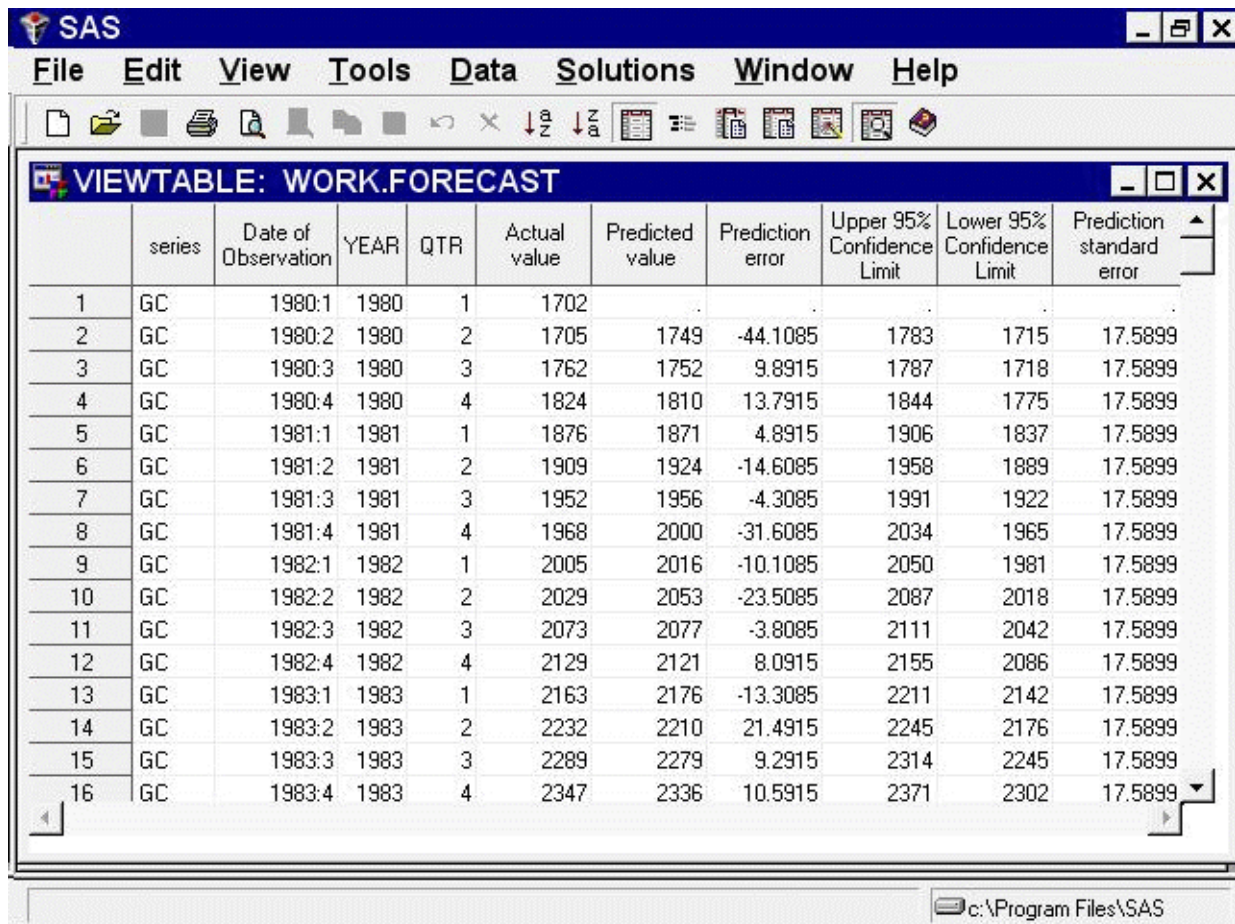
Select **File** and **Close** to close the VIEWTABLE window.

Concatenated Format Forecast Data Set

Use the list to select the `Concatenated` format. Create the forecast data set again, and then select the `Output` button.

The Viewtable window showing the concatenated format of the forecast data set appears, as shown in Figure 43.22.

Figure 43.22 Forecast Data Set—Concatenated Format



	series	Date of Observation	YEAR	QTR	Actual value	Predicted value	Prediction error	Upper 95% Confidence Limit	Lower 95% Confidence Limit	Prediction standard error
1	GC	1980:1	1980	1	1702					
2	GC	1980:2	1980	2	1705	1749	-44.1085	1783	1715	17.5899
3	GC	1980:3	1980	3	1762	1752	9.8915	1787	1718	17.5899
4	GC	1980:4	1980	4	1824	1810	13.7915	1844	1775	17.5899
5	GC	1981:1	1981	1	1876	1871	4.8915	1906	1837	17.5899
6	GC	1981:2	1981	2	1909	1924	-14.6085	1958	1889	17.5899
7	GC	1981:3	1981	3	1952	1956	-4.3085	1991	1922	17.5899
8	GC	1981:4	1981	4	1968	2000	-31.6085	2034	1965	17.5899
9	GC	1982:1	1982	1	2005	2016	-10.1085	2050	1981	17.5899
10	GC	1982:2	1982	2	2029	2053	-23.5085	2087	2018	17.5899
11	GC	1982:3	1982	3	2073	2077	-3.8085	2111	2042	17.5899
12	GC	1982:4	1982	4	2129	2121	8.0915	2155	2086	17.5899
13	GC	1983:1	1983	1	2163	2176	-13.3085	2211	2142	17.5899
14	GC	1983:2	1983	2	2232	2210	21.4915	2245	2176	17.5899
15	GC	1983:3	1983	3	2289	2279	9.2915	2314	2245	17.5899
16	GC	1983:4	1983	4	2347	2336	10.5915	2371	2302	17.5899

This completes the example of how to use the Produce Forecasts window. Select `File` and `Close` to close the Viewtable window. Select the `Close` button to return to the Time Series Forecasting window.

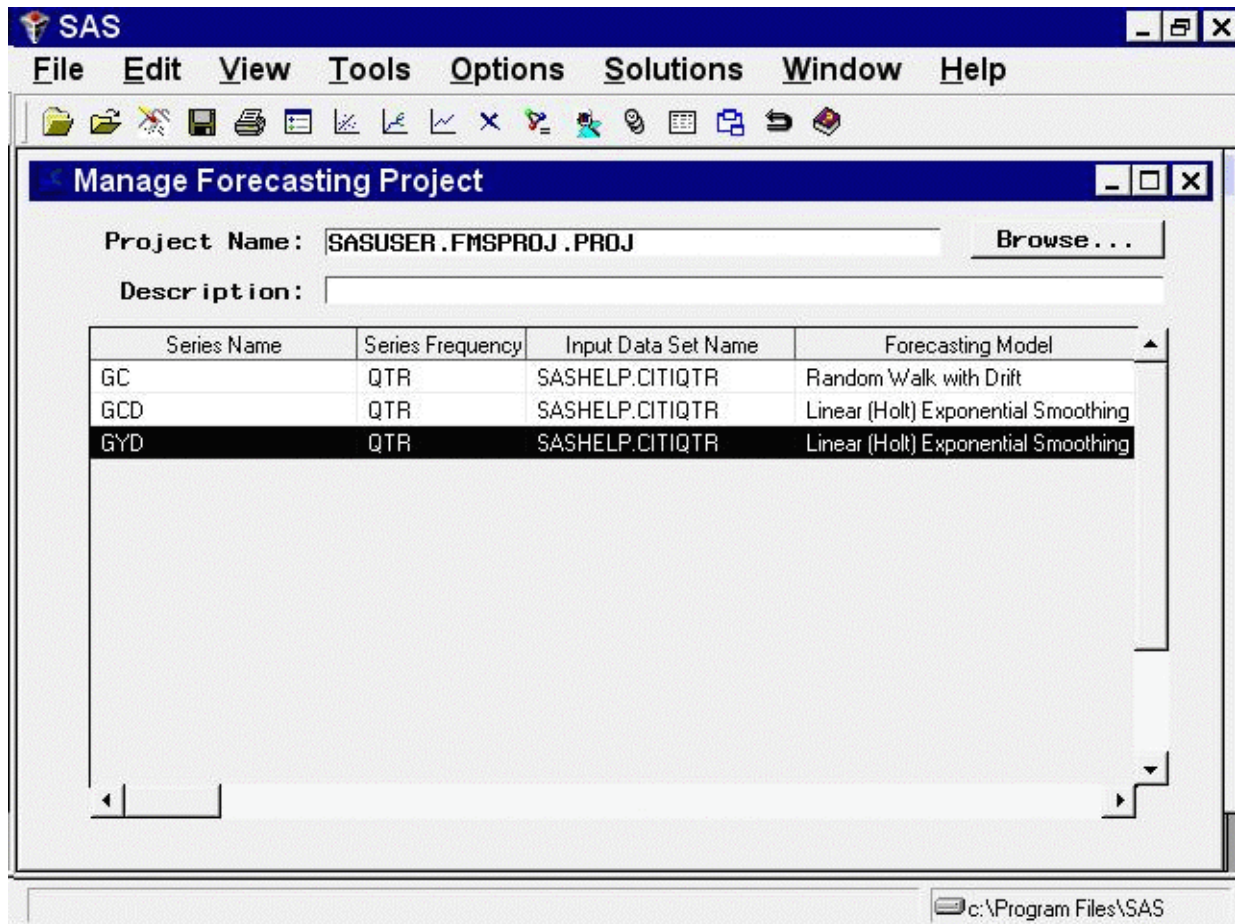
Forecasting Projects

The system collects all the forecasting models you create, together with the options you set, into a package called a *forecasting project*. You can save this information in a SAS catalog entry and restore your work in

later forecasting sessions. You can store any number of forecasting projects under different catalog entry names.

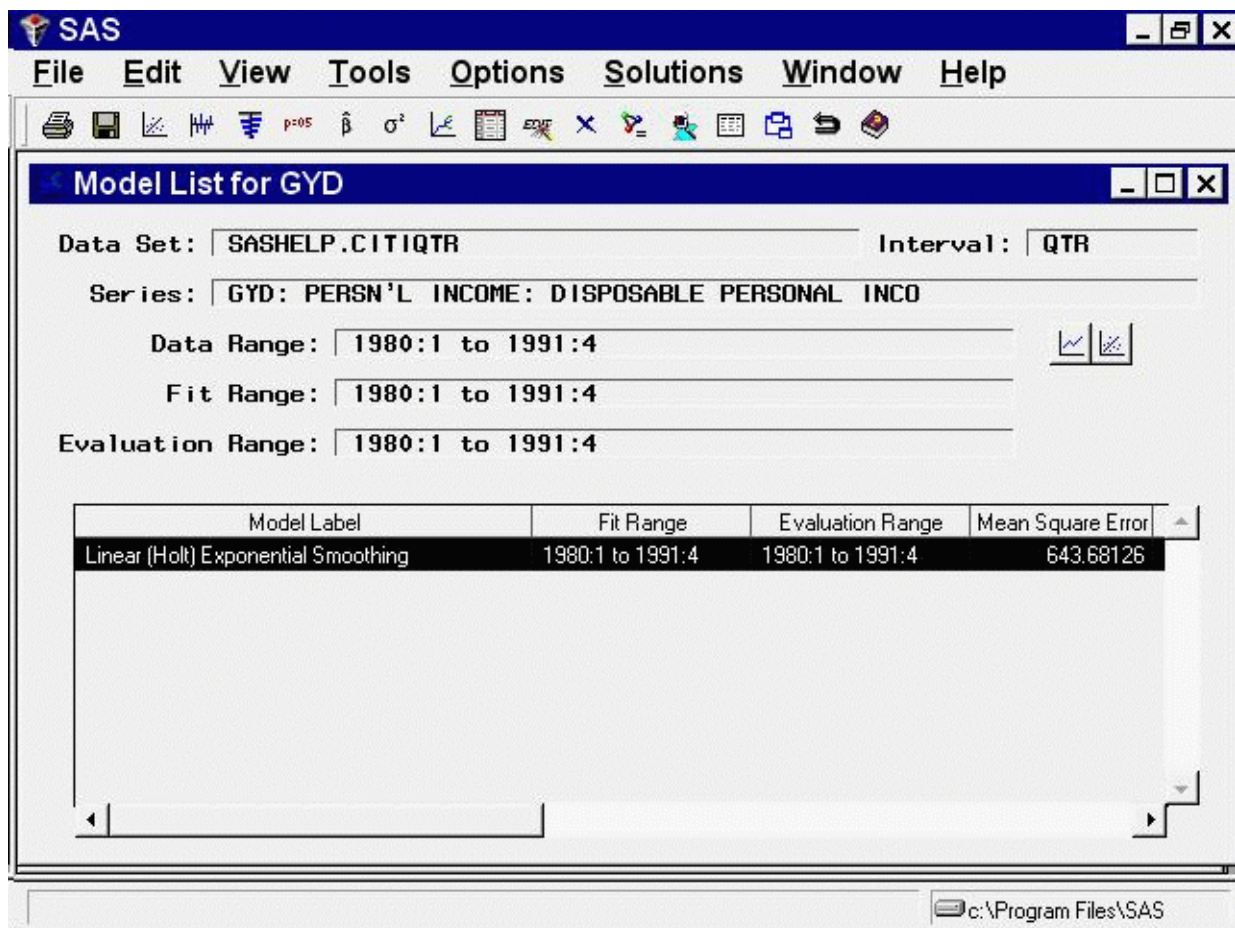
To see how this works, select the Manage Projects button. This opens the Manage Forecasting Project window, as shown in Figure 43.23.

Figure 43.23 Manage Forecasting Project Window



The table in this window lists the series for which forecasting models have been fit, and it shows for each series the forecasting model used to produce the forecasts. This window provides several features that allow you to manage the information in your forecasting project.

You can select a row of the table to drill down to the list of models fit to the series. Select the GYD row of the table, either by double-clicking with the mouse or by clicking once to highlight the table row and then selecting **List Models** from the toolbar or from the Tools menu. This opens the Model List window for this series, as shown in Figure 43.24.

Figure 43.24 Model List Window

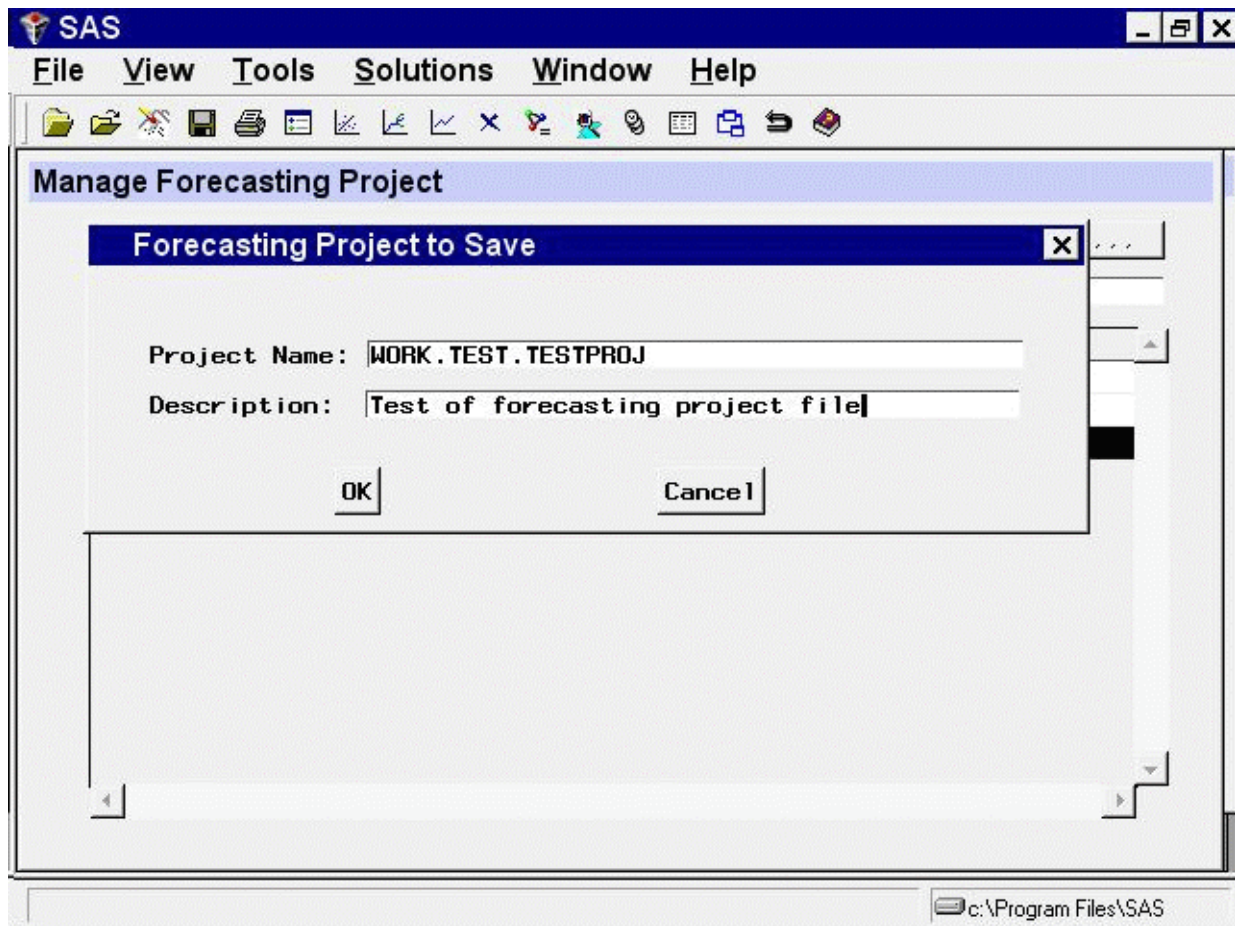
Because the Automatic Model Fitting process kept only the best fitting model, only one model appears in the model list. You can fit and retain any number of models for each series, and all the models fit and kept will appear in the series' model list.

Select **Close** from the toolbar or from the **File** menu to return to the Manage Forecasting Project window.

Saving and Restoring Project Information

To illustrate how you can save your work between sessions, in this section you will exit and then re-enter the Forecasting System.

From the Manage Forecasting Project window, select **File** and **Save as**. This opens the Forecasting Project to Save window. In the Project Name field, type the name WORK.TEST.TESTPROJ. In the Description field, type "Test of forecasting project file." The window should now appear as shown in Figure 43.25.

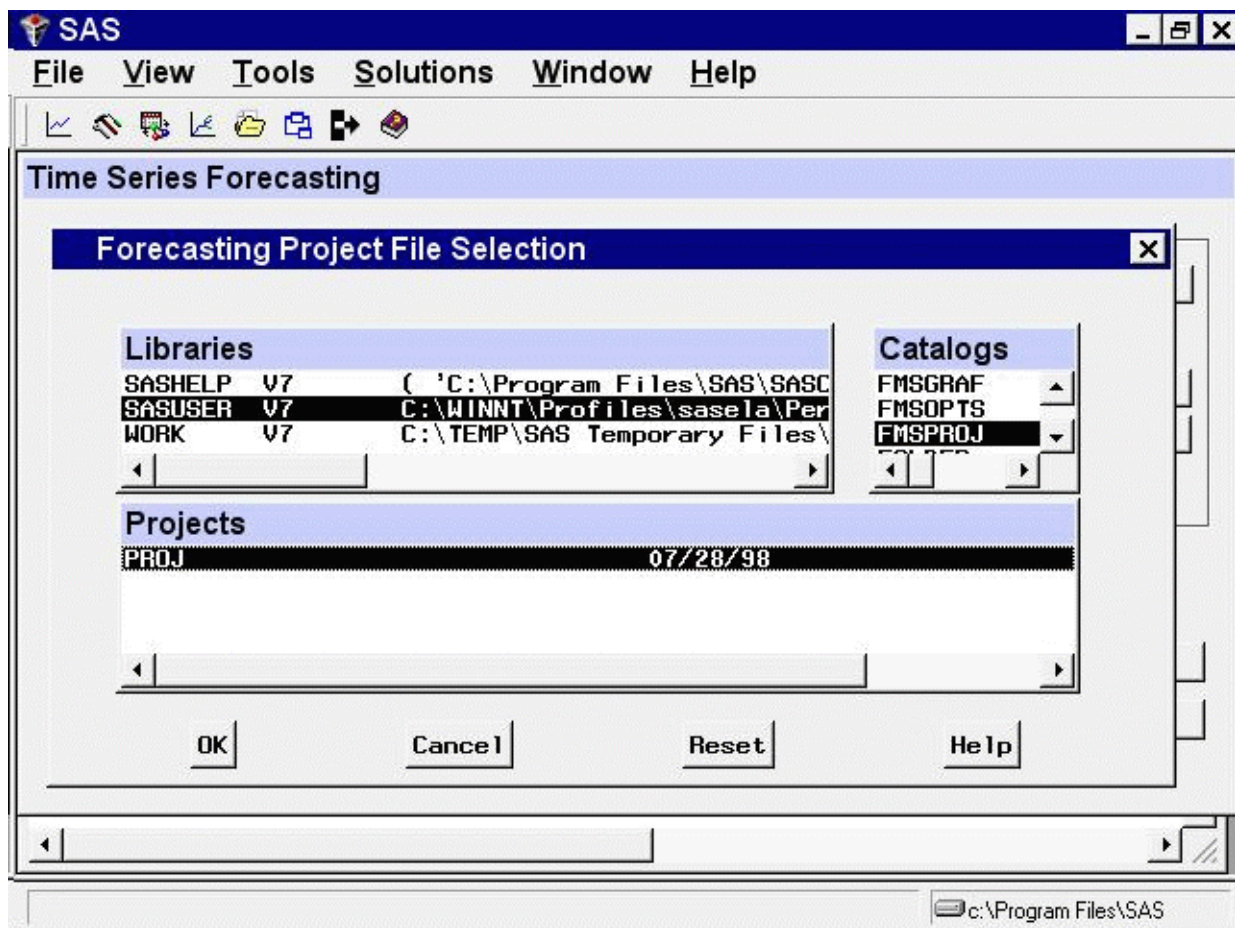
Figure 43.25 Project to Save Name and Description

Select the **OK** button. This returns you to the Project Management window and displays a message indicating that the project was saved.

Select **Close** from the toolbar or from the **File** menu to return to the Time Series Forecasting window. Now select the **Exit** button. The system asks if you are sure you want to exit the system; select **Yes**. The forecasting application now terminates.

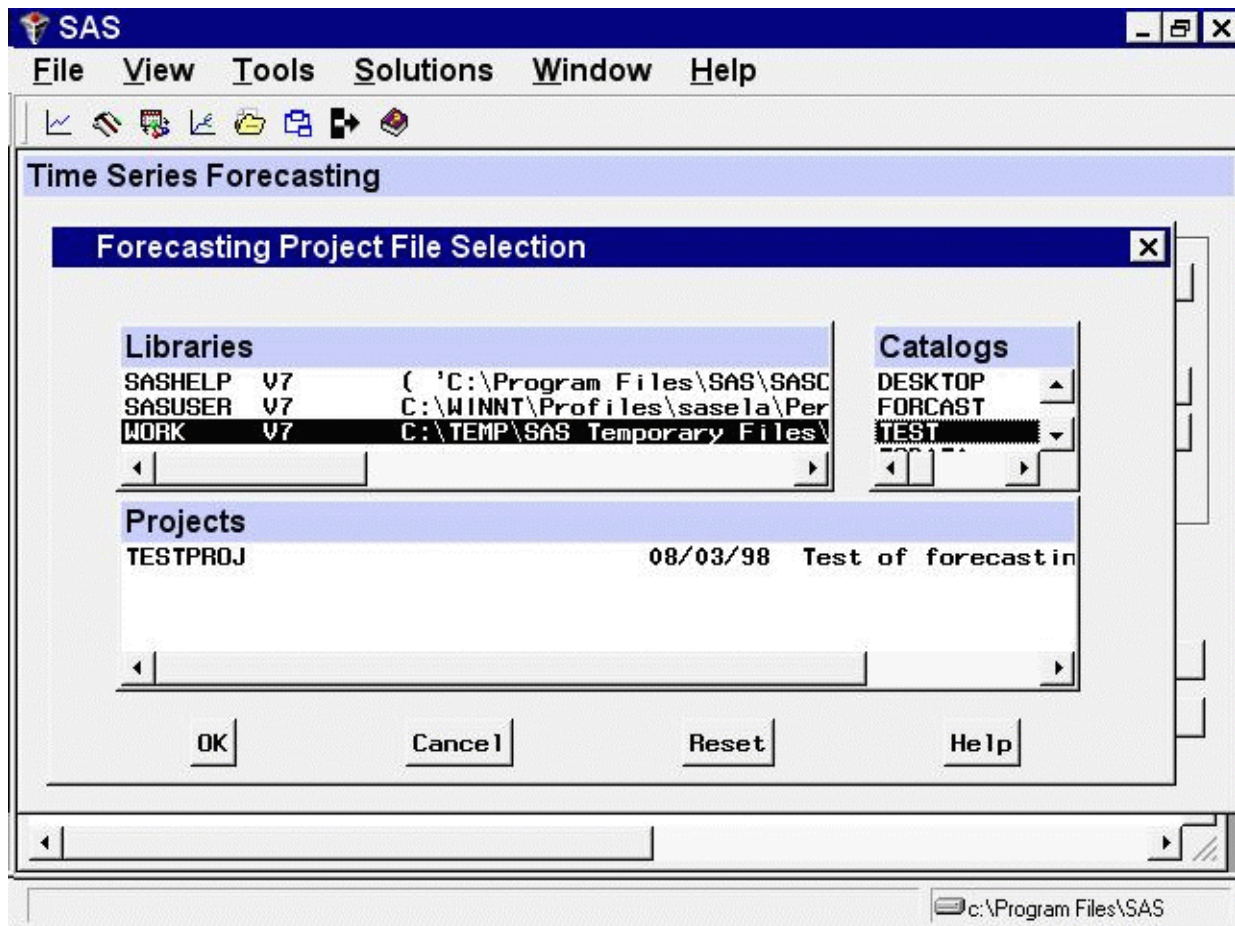
Open the forecasting application again. A new project name is displayed by default.

Now restore the forecasting project you saved previously. Select the **Browse** button to the right of the Project field. This opens the Forecasting Project File Selection window, as shown in [Figure 43.26](#).

Figure 43.26 Forecasting Project File Selection Window

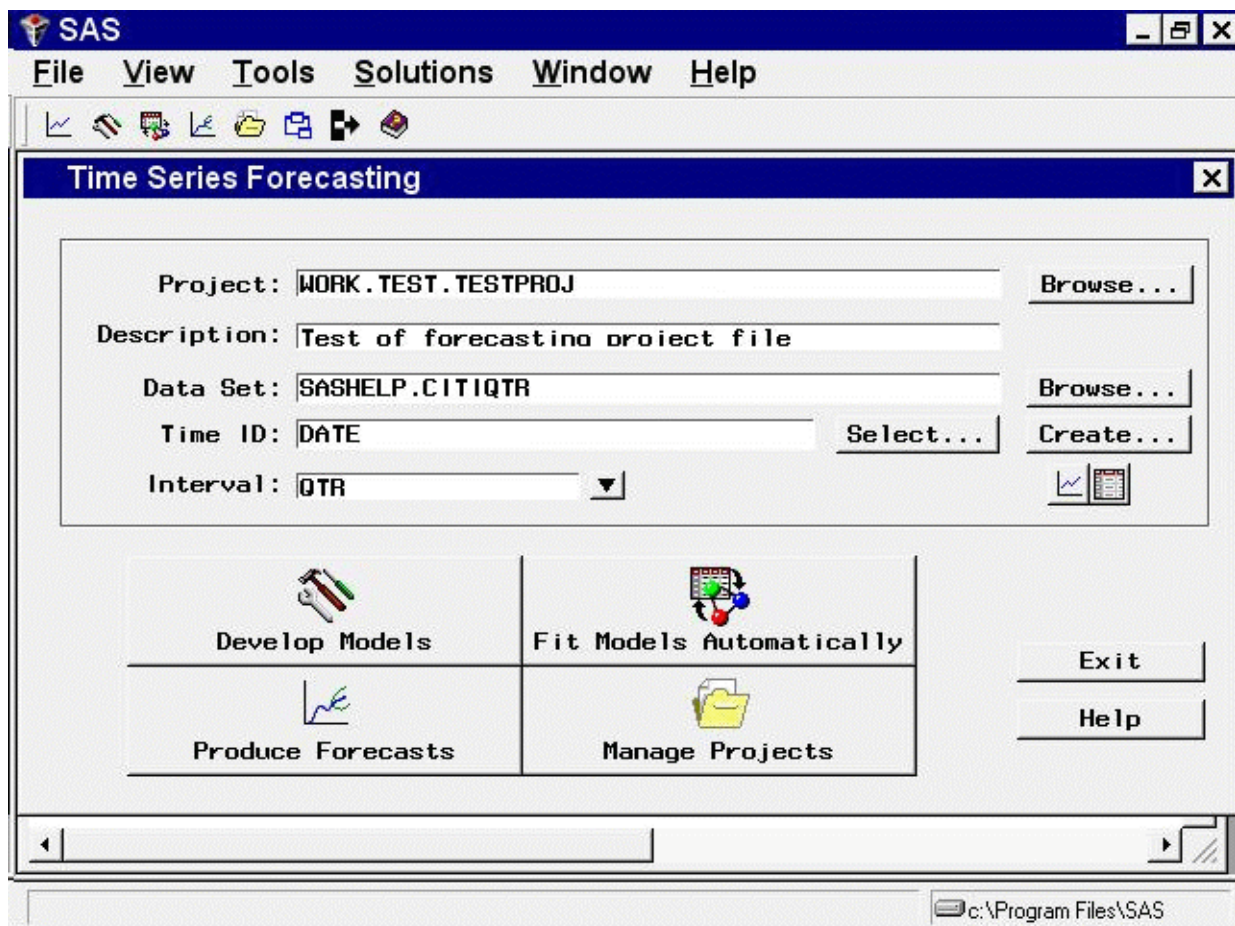
Select the WORK library from the Libraries list. The Catalogs list now shows all the SAS catalogs in the WORK library.

Select the TEST catalog. The Projects list now shows the list of forecasting projects in the catalog TEST. So far, you have created only one project file, TESTPROJ; so TESTPROJ is the only entry in the Projects list, as shown in Figure 43.27.

Figure 43.27 Forecasting Projects List

Select TESTPROJ from the Projects list and then select the OK button. This returns you to the Time Series Forecasting window.

The system loads the project information you saved in TESTPROJ and displays a message indicating this. The Project field is now set to WORK.TEST.TESTPROJ, and the description is the description you previously gave to TESTPROJ, as shown in [Figure 43.28](#).

Figure 43.28 Time Series Forecasting Window after Loading Project

If you now select the Manage Projects button, you will see the list of series and forecasting models you created in the previous forecasting session.

Sharing Projects

If you plan to work with others on a forecasting project, you might need to consider how project information can be shared. The series, models, and results of your project are stored in a forecasting project (FMSPROJ) catalog entry in the location you specify, as illustrated in the previous section. You need only read access to the catalog to work with it, but you must have write access to save the project. Multiple users cannot open a project for update at the same time, but they can do so at different times if they all have write access to the catalog where it is stored.

Project options settings such as the *model selection criterion* and *number of models to keep* are stored in an SLIST catalog entry in the SASUSER or TSFSUSER library. Write access to this catalog is required. If you have only read access to the SASUSER library, you can use the -RSASUSER option when starting SAS. You will be prompted for a location for the TSFSUSER library, if it is not already assigned. If you want to use TSFSUSER routinely, assign it before you start the Time Series Forecasting System. Select New from

the SAS Explorer file menu. In the New Library window, type TSFSUSER for the name. Click the Browse button and select the directory or folder you want to use. Turn on the *enable at startup* option so this library will be assigned automatically in subsequent sessions.

The SASUSER library is typically used for private settings saved by individual users. This is the default location for project options. If a work group shares a single options catalog (SASUSER or TSFSUSER points to the same location for all users), then only one user can use the system at a time.

Develop Models Window

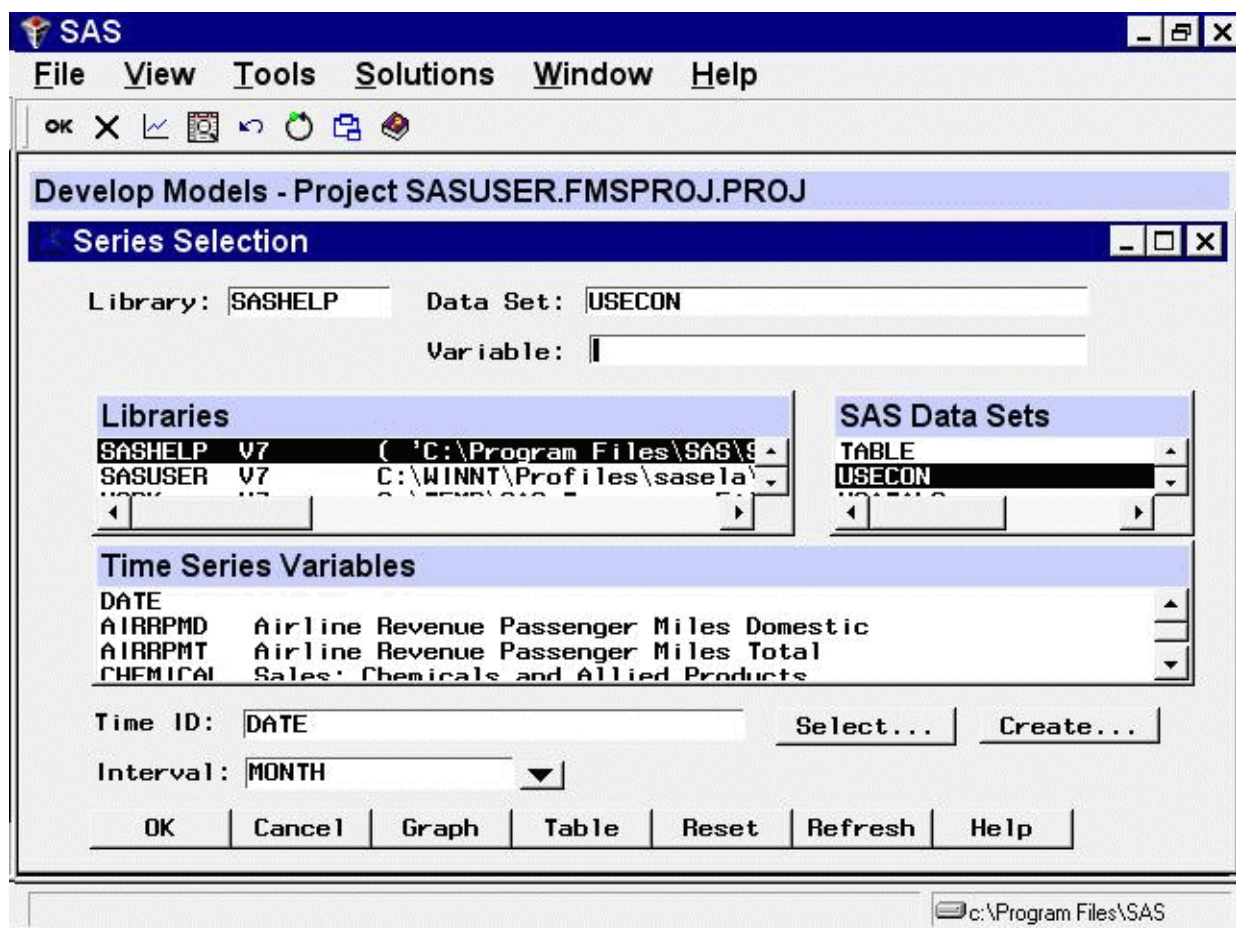
In the first forecasting example, you used the Automatic Model Fitting window to fit and select the forecasting model for each series automatically. In addition to this automatic forecasting process, you can also work with time series one at a time to fit forecasting models and apply your own judgment to choose the best forecasting model for each series.

Using the Automatic Model Fitting feature, the system acts like a “black box.” This section goes inside the black box to look at the kinds of forecasting methods that the system provides and introduces some of the tools the system offers to help you find the best forecasting model.

Introduction

From the Time Series Forecasting window, select the Browse button to the right of the Data Set field to open the Data Set Selection window. Select the USECON data set from the SASHELP library. This data set contains monthly data on the U.S. economy.

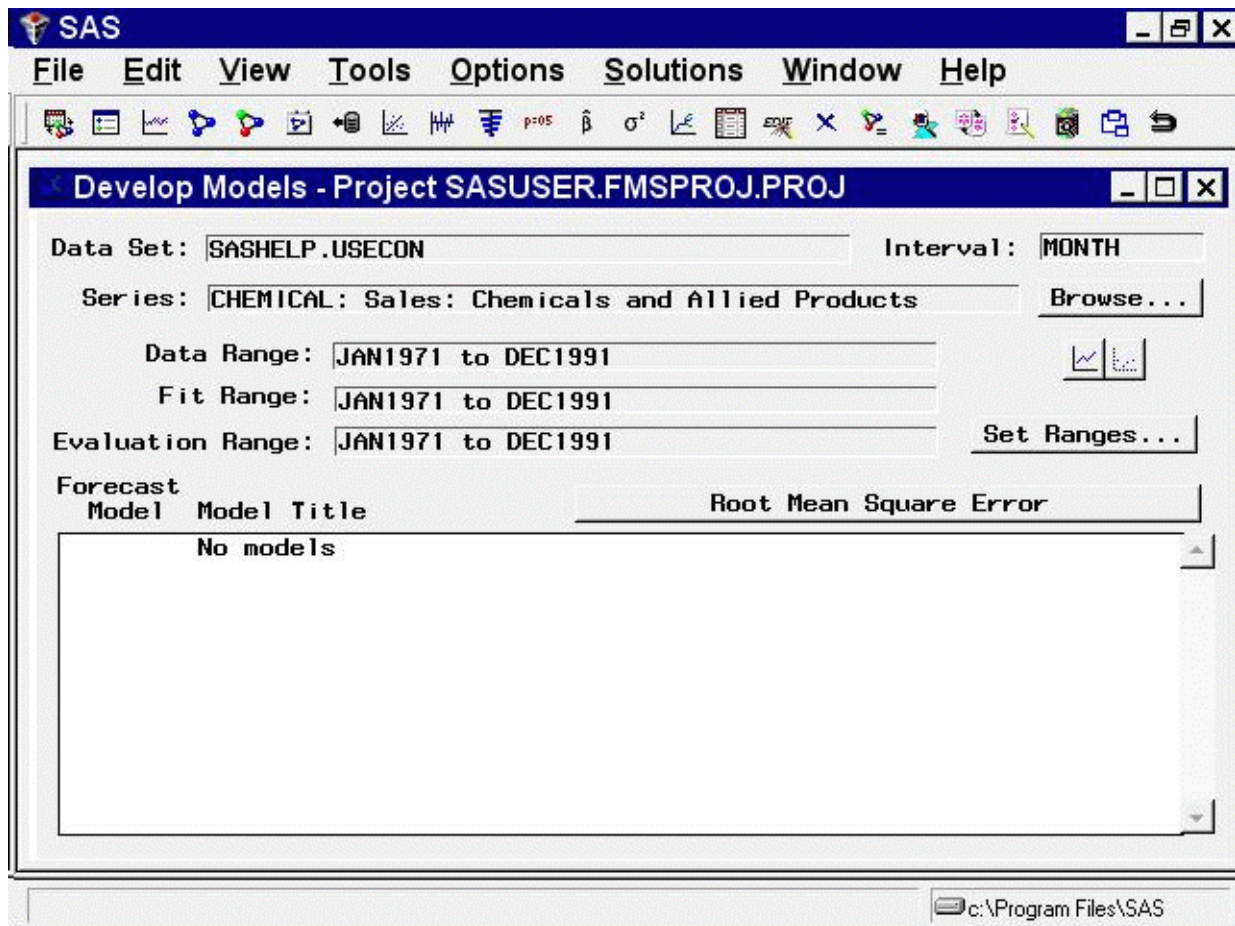
Select OK to close the selection window. Now select the Develop Models button. This opens the Series Selection window, as shown in [Figure 43.29](#). You can enlarge this window for easier viewing of lists of data sets and series.

Figure 43.29 Series Selection Window

Select the series CHEMICAL: Sales of Chemicals and Allied Products, and then select the OK button.

This opens the Develop Models window, as shown in Figure 43.30.

Figure 43.30 Develop Models Window



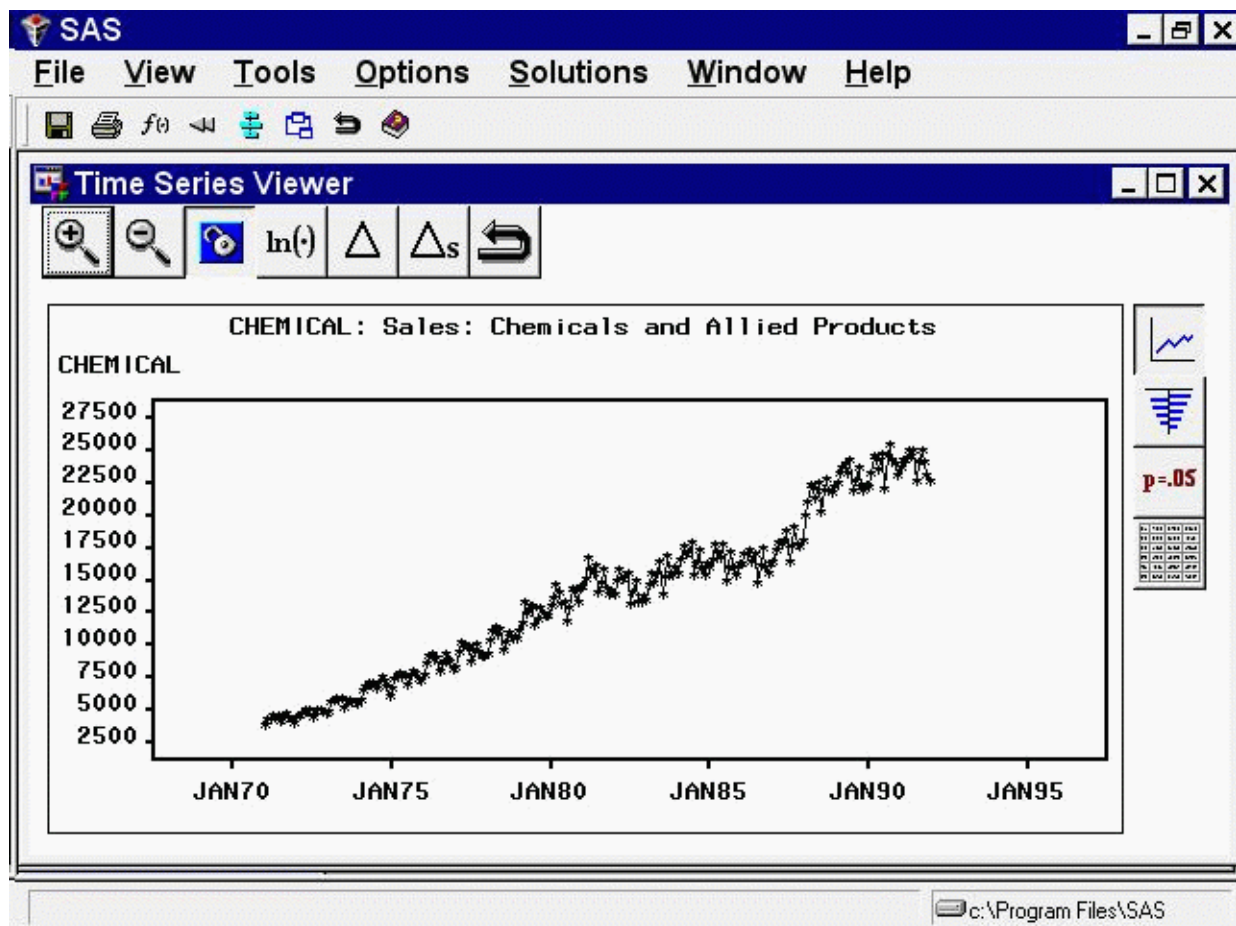
The Data Set, Interval, and Series fields in the upper part of the Develop Models window indicate the series with which you are currently working. You can change the settings of these fields by selecting the Browse button.

The Data Range, Fit Range, and Evaluation Range fields show the time period over which data are available for the current series, and what parts of that time period are used to fit forecasting models to the series and to evaluate how well the models fit the data. You can change the settings of these fields by selecting the Set Ranges button.

The bottom part of the Develop Models window consists of a table of forecasting models fit to the series. Initially, the list is empty, as indicated by the message “No models.” You can fit any number of forecasting models to each series and designate which one you want to use to produce forecasts.

Graphical tools are available for exploring time series and fitted models. The two icons below the Browse button access the Time Series Viewer and the Model Viewer.

Select the left icon. This opens the Time Series Viewer window, as shown in [Figure 43.31](#).

Figure 43.31 Chemical and Allied Product Series

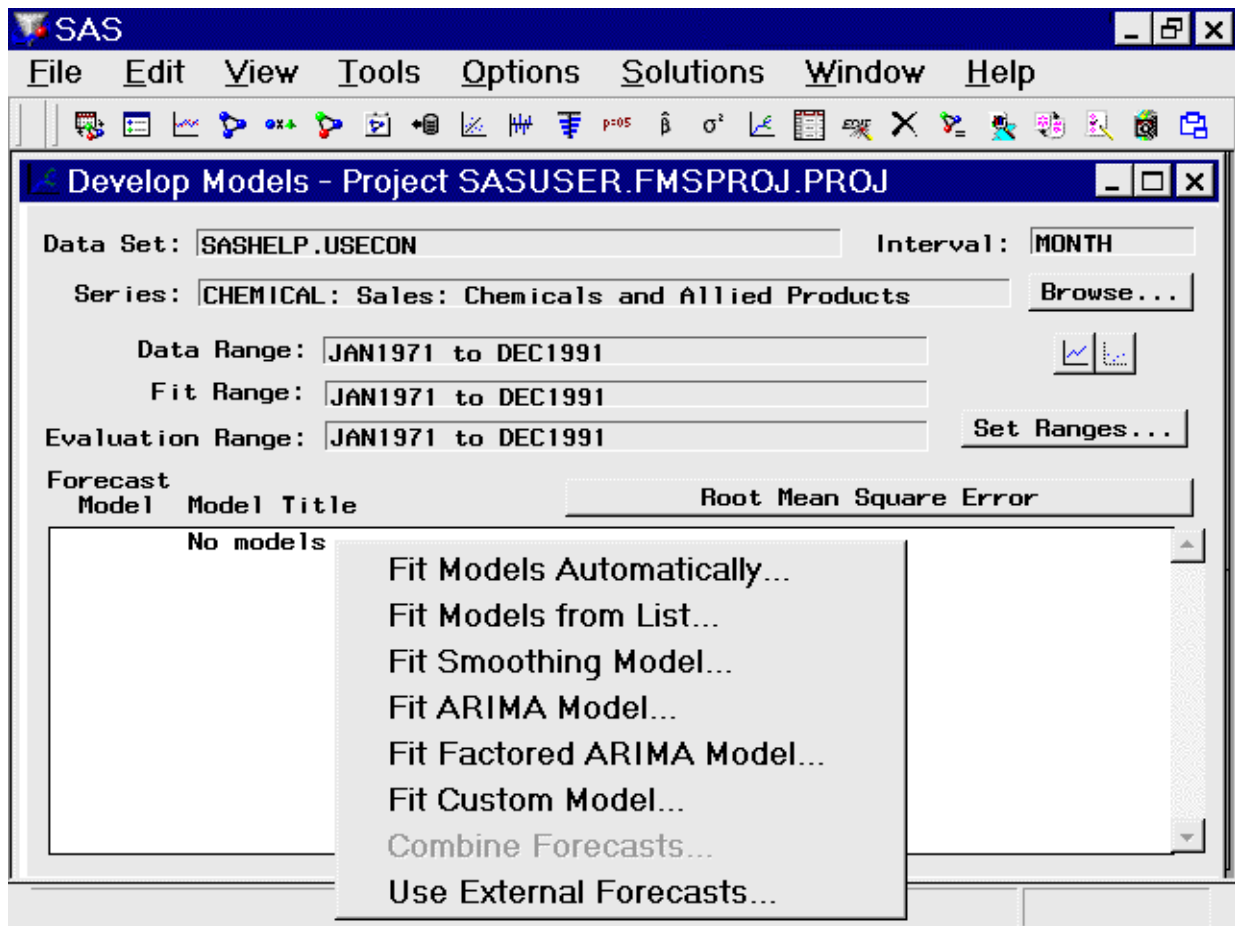
The Time Series Viewer displays a plot of the CHEMICAL series. The Time Series Viewer offers many useful features, which are explored in later sections.

The Time Series Viewer appears in a separate resizable window. You can switch back and forth between the Time Series Viewer window and other windows. For now, return to the Develop Models window. You can close the Time Series Viewer window or leave it open. (To close the Time Series Viewer window, select **Close** from the toolbar or from the File menu.)

Fitting Models

To open a menu of model fitting choices, select **Edit** from the menu bar and then select **Fit Model**, or select **Fit Models from List** in the toolbar, or simply select a blank line in the table as shown in Figure 43.32.

Figure 43.32 Menu of Model Fitting Choices



The Forecasting System provides several ways to specify forecasting models. The eight choices given by the menu shown in Figure 43.32 are as follows:

Fit Models Automatically

performs for the current series the same automatic model selection process that the Automatic Model Fitting window applies to a set of series.

Fit Models from List

presents a list of commonly used forecasting models for convenient point-and-click selection.

Fit Smoothing Model

displays the Smoothing Model Specification window, which enables you to specify several kinds of exponential smoothing and Winters method forecasting models.

Fit ARIMA Model

displays the ARIMA Model Specification window, which enables you to specify many kinds of autoregressive integrated moving average (ARIMA) models, including seasonal ARIMA models and ARIMA models with regressors, transfer functions, and other predictors.

Fit Factored ARIMA Model

displays the Factored ARIMA Model Specification window, which enables you to specify more general ARIMA models, including subset models and models with unusual and/or multiple seasonal cycles. It also supports regressors, transfer functions, and other predictors.

Fit Custom Model

displays the Custom Model Specification window, which enables you to construct a forecasting model by specifying separate options for transforming the data, modeling the trend, modeling seasonality, modeling autocorrelation of the errors, and modeling the effect of regressors and other independent predictors.

Combine Forecasts

displays the Forecast Combination Model Specification window, which enables you to specify models that produce forecasts by combining, or averaging, the forecasts from other models. (This option is not available unless you have fit at least two models.)

Use External Forecasts

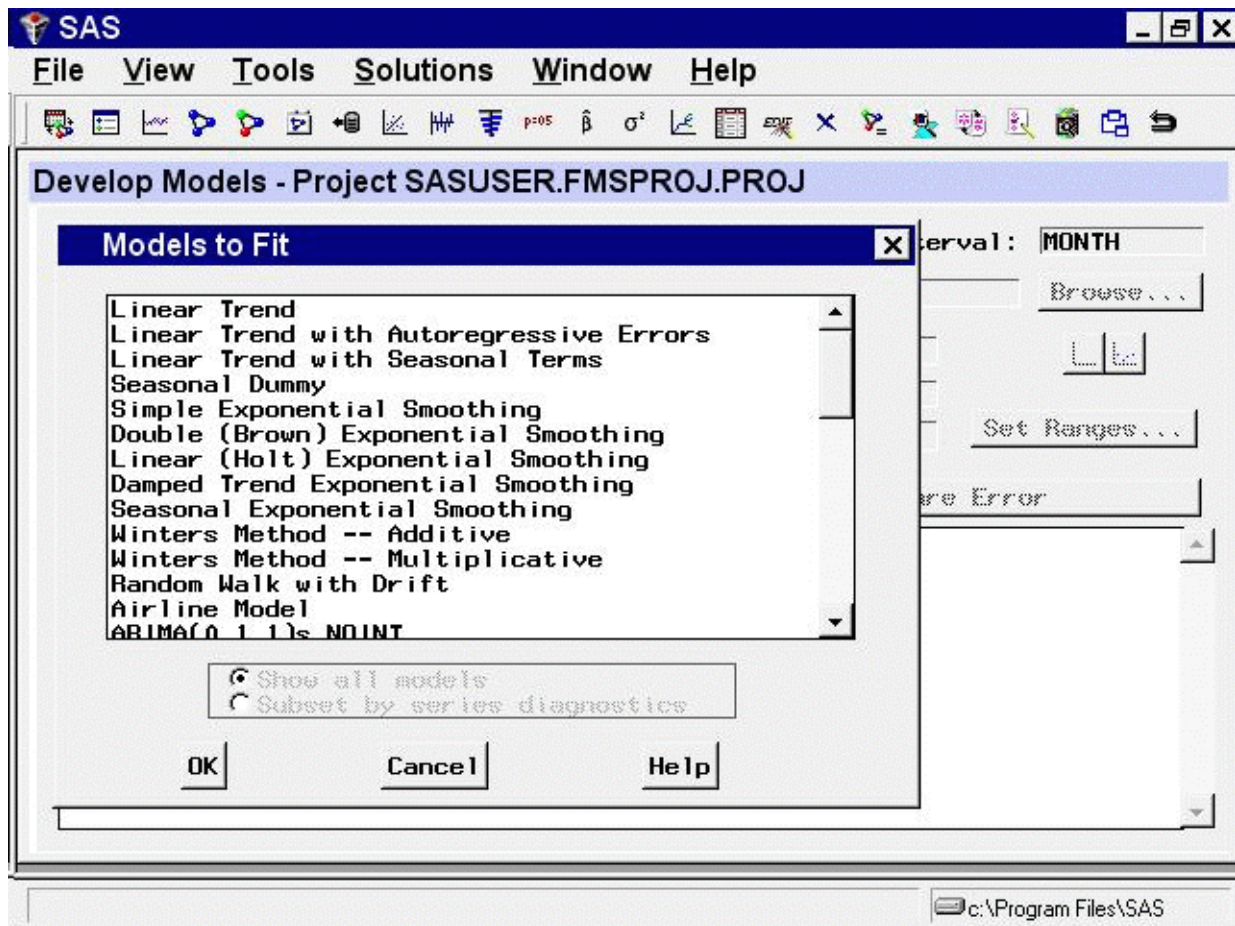
displays the External Forecast Model Specification window, which enables you to use judgmental or externally produced forecasts that have been saved in a separate series in the data set.

All of the forecasting models used by the system are ultimately specified through one of the four windows: Smoothing Method Specification, ARIMA Model Specification, Factored ARIMA Model Specification, or Custom Model Specification. You can specify the same models with either the ARIMA Model Specification window or the Custom Model Specification window, but the Custom Model Specification window can provide a more natural way to specify models for those who are less familiar with the Box-Jenkins style of time series model specification.

The Automatic Model feature, the Models to Fit window, and the Forecast Combination Model Specification window all deal with lists of forecasting models previously defined through the Smoothing Model, ARIMA Model, or Custom Model specification windows. These windows are discussed in detail in later sections.

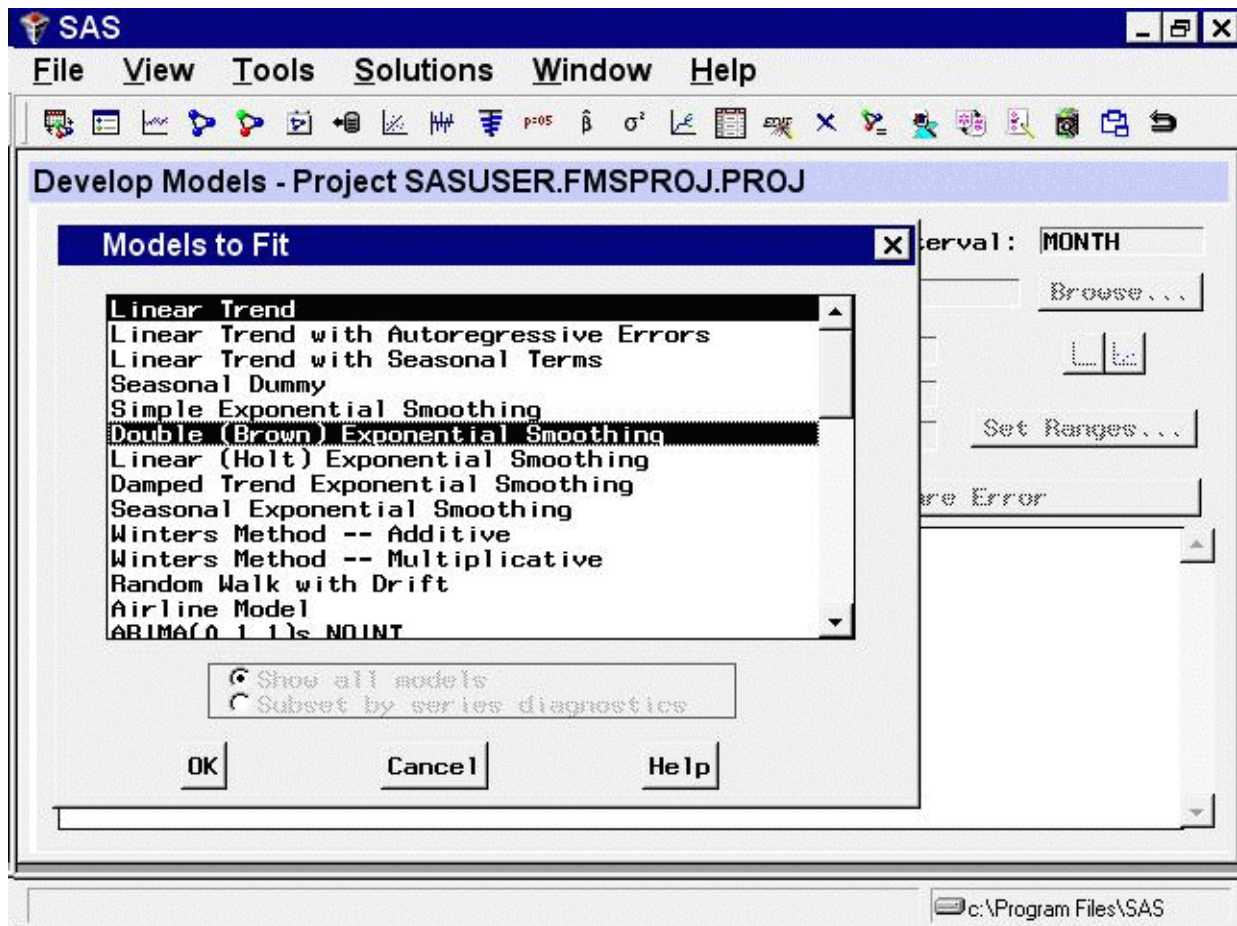
To get started using the Develop Models window, select the Fit Models from List item from the menu shown in [Figure 43.32](#). This opens the Models to Fit window, as shown in [Figure 43.33](#).

Figure 43.33 Models to Fit Window



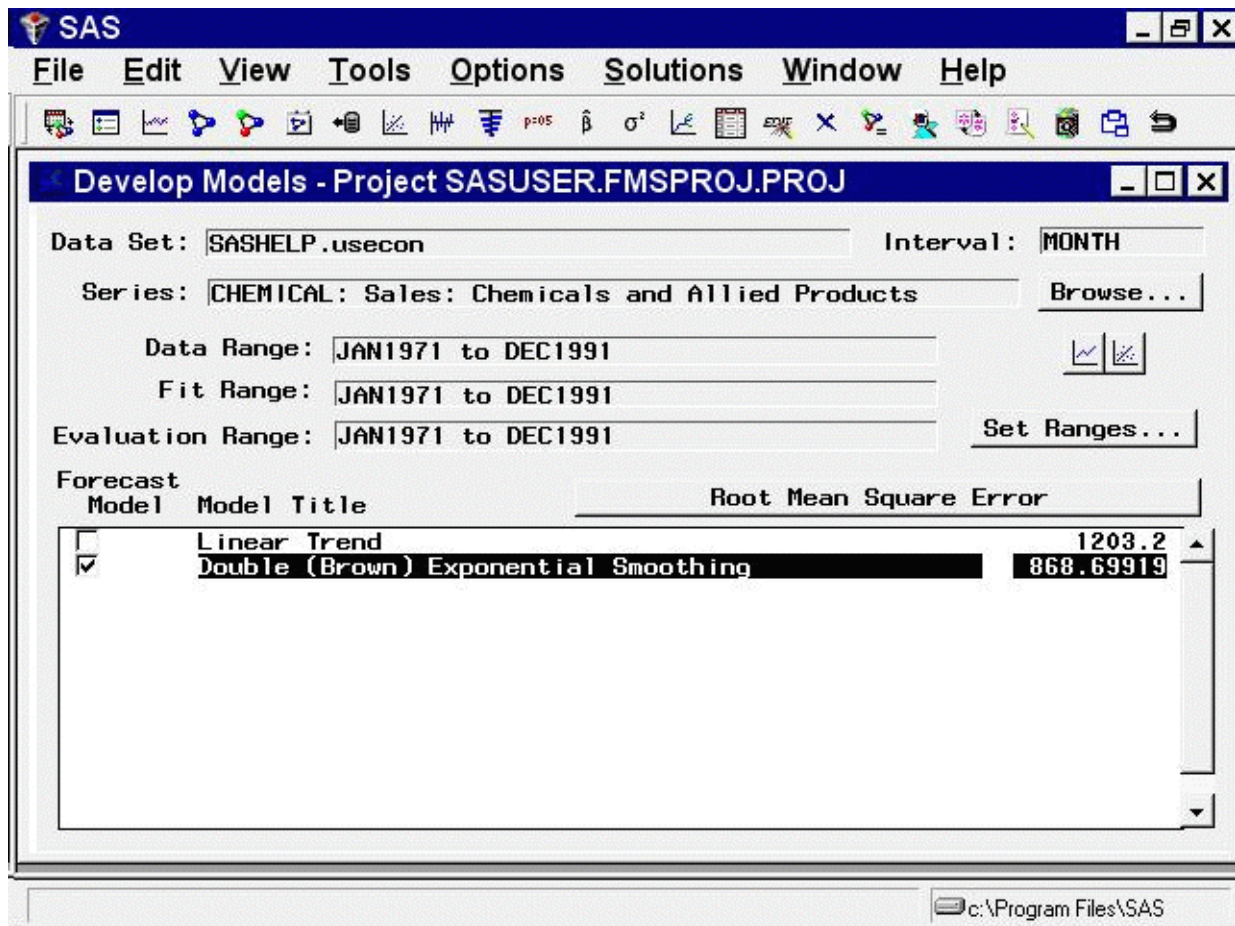
You can select several models to fit at once by holding down the CTRL key as you make the selections. Select **Linear Trend** and **Double (Brown) Exponential Smoothing**, as shown in [Figure 43.34](#), and then select the **OK** button.

Figure 43.34 Selecting Models to Fit



The system fits the two models you selected. After the models are fit, the labels of the two models and their goodness-of-fit statistic are added to the model table, as shown in [Figure 43.35](#).

Figure 43.35 Fitted Models List



Model List and Statistics of Fit

In the model list, the *Model Title* column shows the descriptive labels for the two fitted models, in this case Linear Trend and Double Exponential Smoothing.

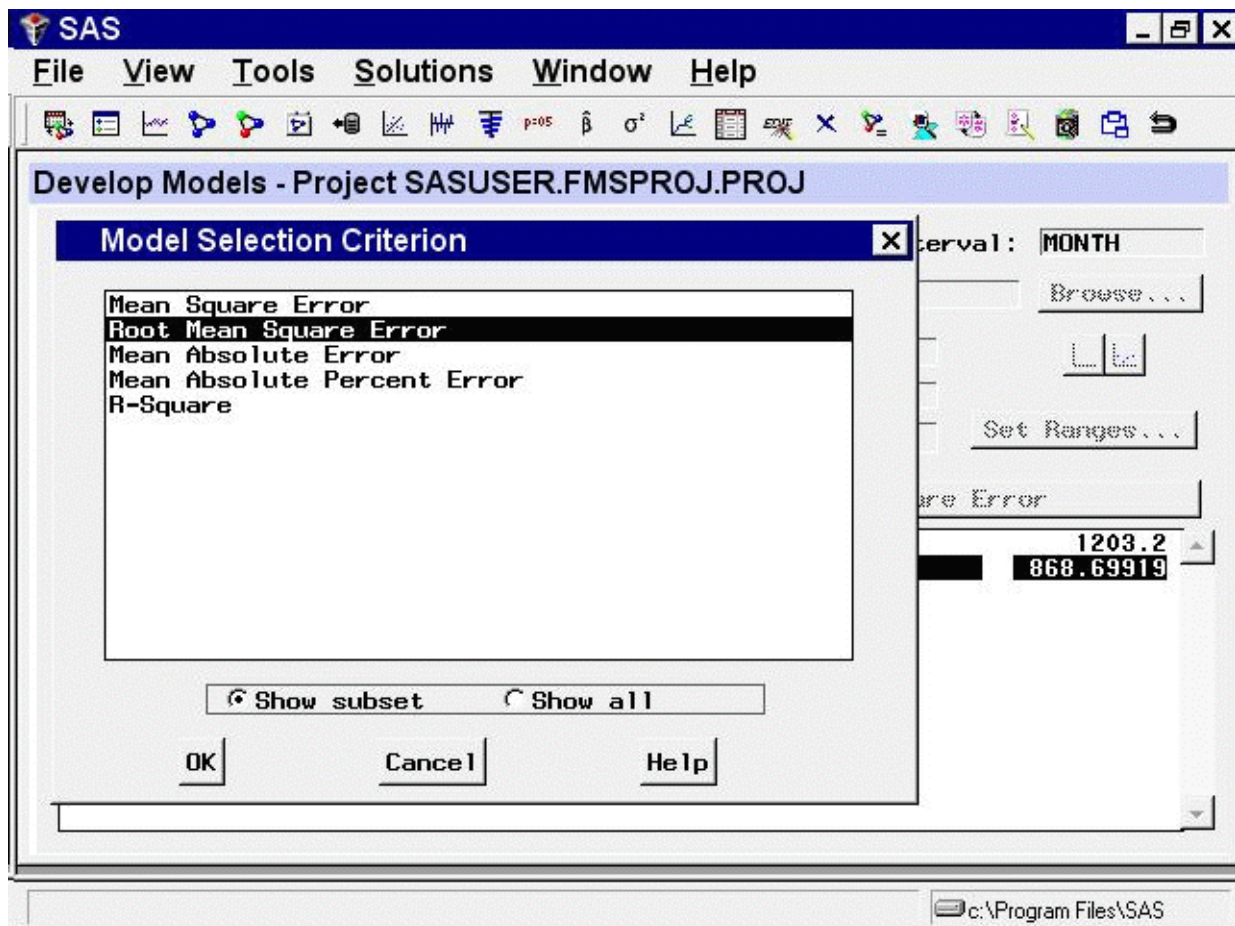
The column labeled *Root Mean Square Error* (or labeled *Mean Absolute Percent Error* if you continued from the example in the previous section) shows the goodness-of-fit criterion used to decide which model fits better. By default, the criterion used is the root mean square error, but you can choose a different measure of fit. The linear trend model has a root mean square error of 1203, while the double exponential smoothing model fits better, with a RMSE of only 869.

The left column labeled *Forecast Model* consists of check boxes that indicate which one of the models in the list has been selected as the model to use to produce the forecasts for the series. When new models are fit and added to the model list, the system sets the Forecast Model flags to designate the one model with the best fit—as measured by the selected goodness-of-fit statistic—as the forecast model. (In the case of ties, the first model with the best fit is selected.)

Because the Double Exponential Smoothing model has the smaller RMSE of the two models in the list, its Forecast Model check box is set. If you would rather produce forecasts by using the Linear Trend model, choose it by selecting the corresponding check box in the Forecast Model column.

To use a different goodness-of-fit criterion, select the button with the current criterion name on it (Root Mean Square Error or Mean Absolute Percent Error). This opens the Model Selection Criterion window, as shown in Figure 43.36.

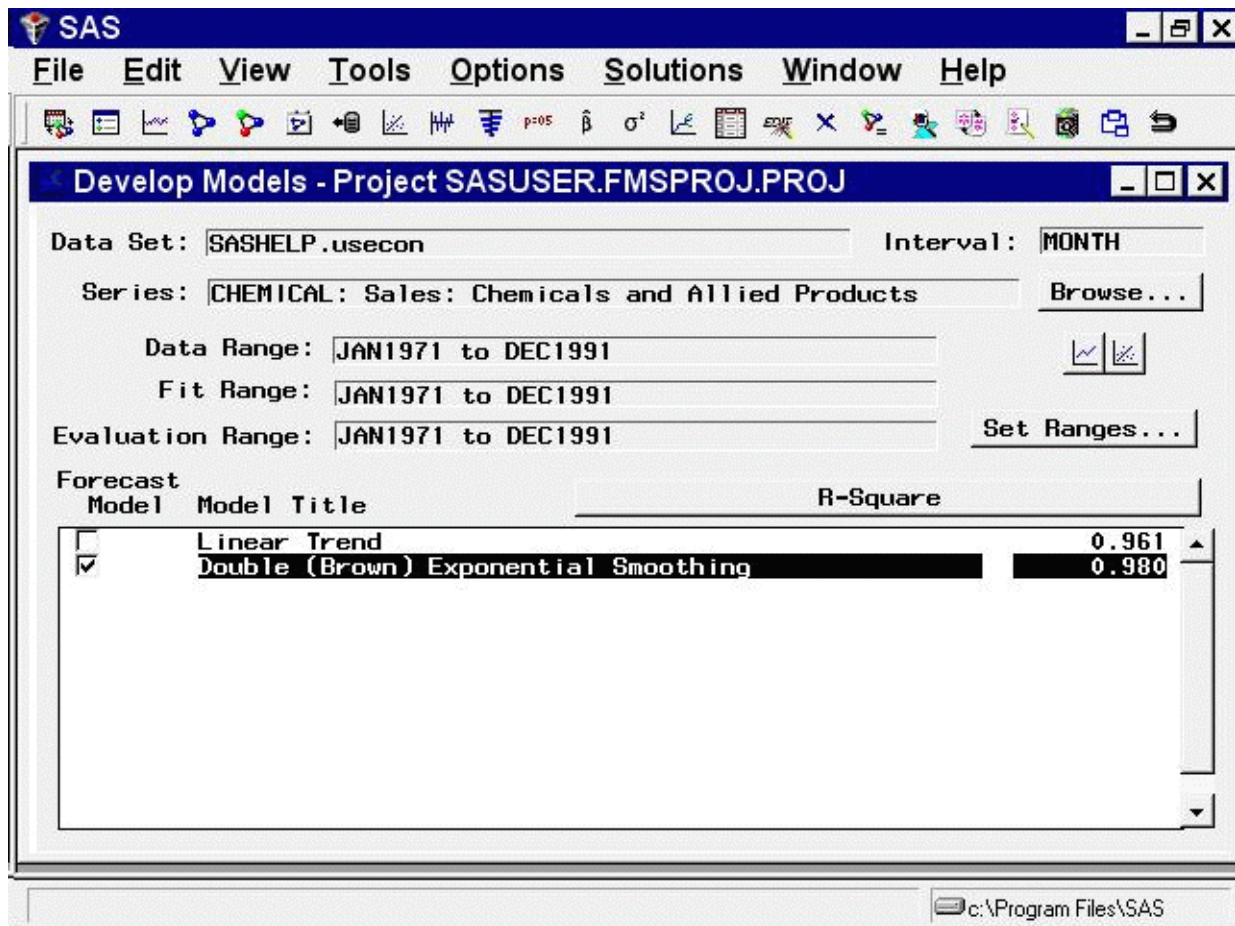
Figure 43.36 Model Selection Criterion Window



The system provides many measures of fit that you can use as the model selection criterion. To avoid confusion, only the most popular of the available fit statistics are shown in this window by default. To display the complete list, you can select the *Show all* option. You can control the subset of statistics listed in this window through the Statistics of Fit item in the Options menu on the Develop Models window.

Initially, Root Mean Square Error is selected. Select R-Square and then select the OK button. This changes the fit statistic displayed in the model list, as shown in Figure 43.37.

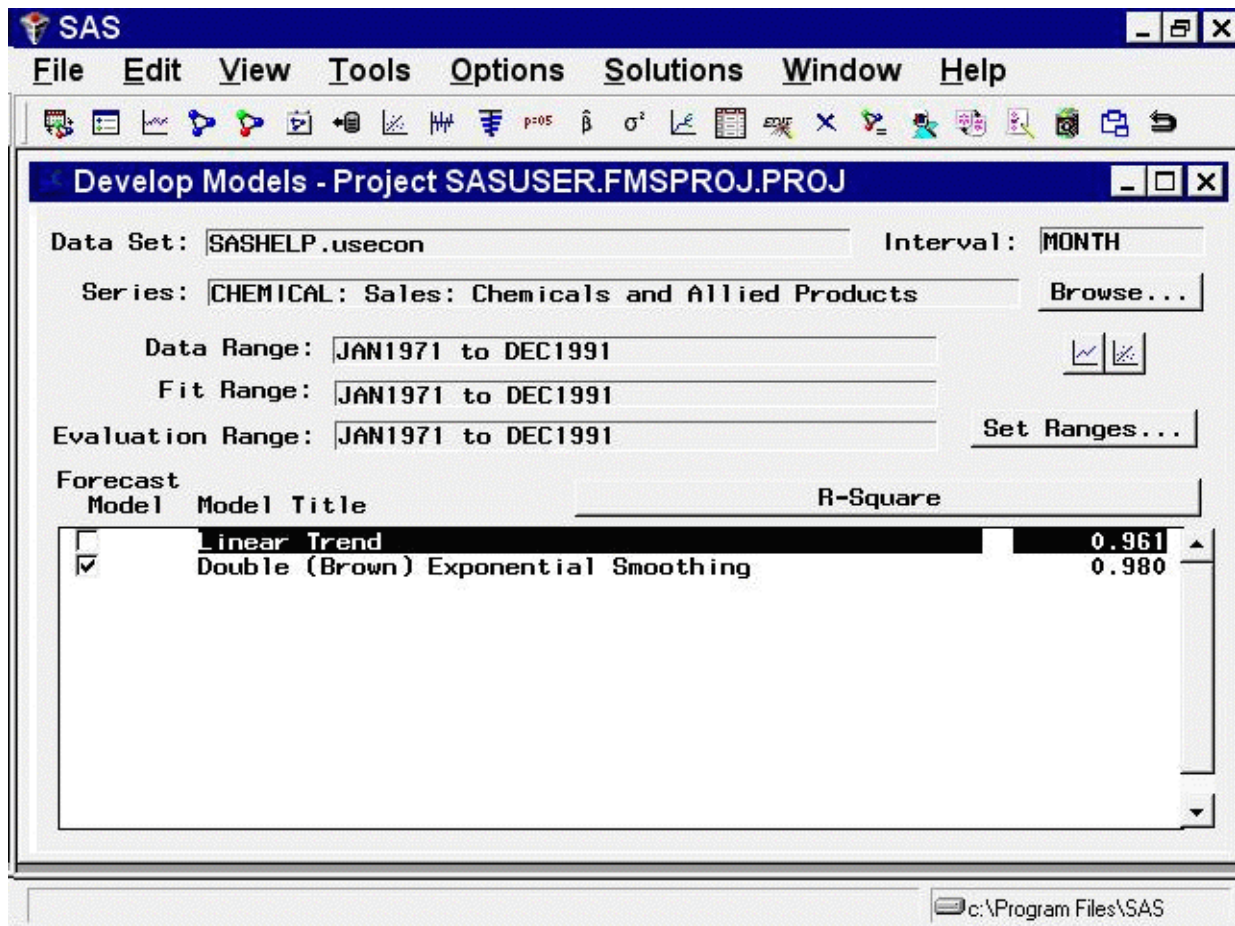
Figure 43.37 Model List with R-Square Statistics



Now that you have fit some models to the series, you can use the Model Viewer button to take a closer look at the predictions of these models.

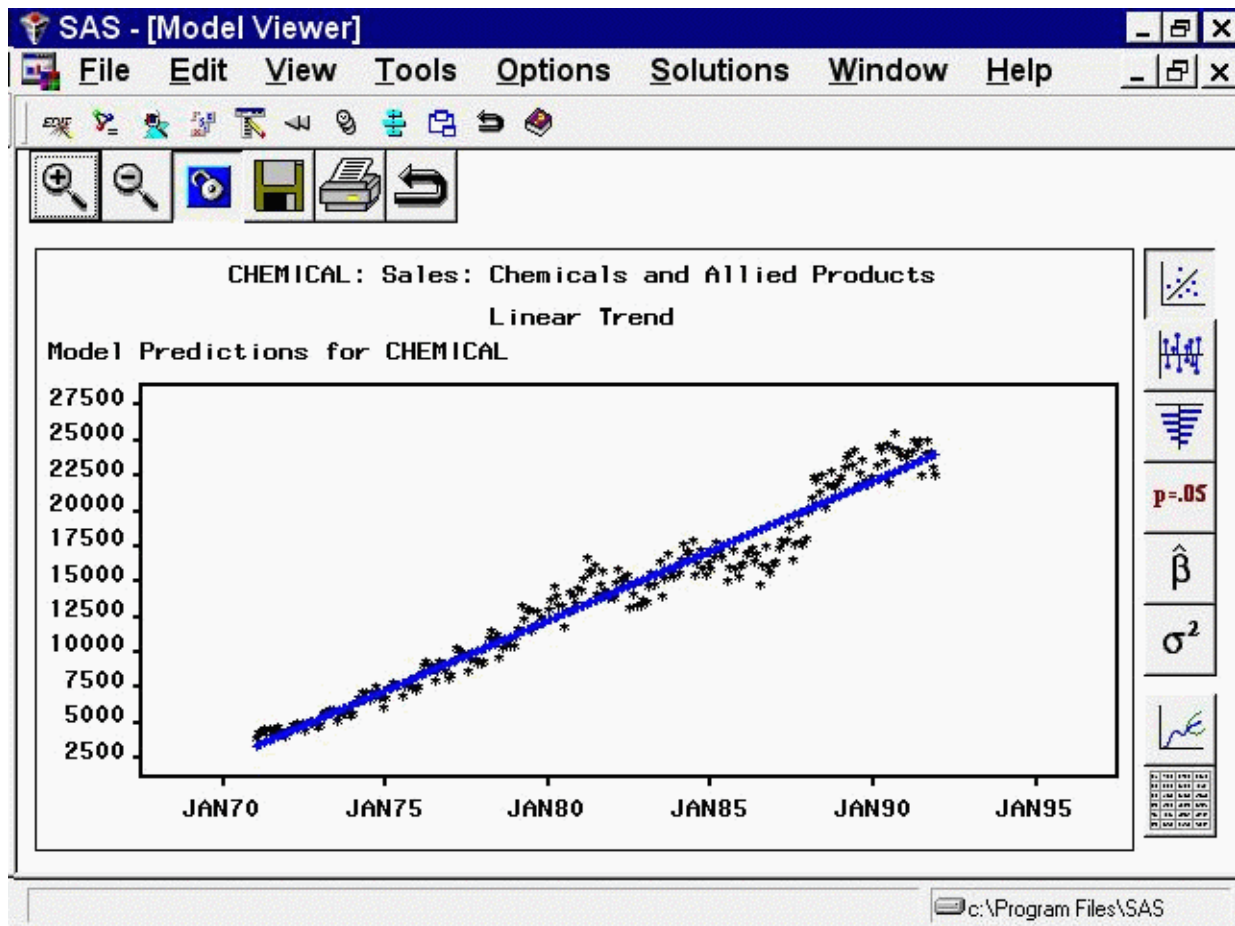
Model Viewer

In the Develop Models window, select the row in the table containing the Linear Trend model so that this model is highlighted. The model list should now appear as shown in Figure 43.38.

Figure 43.38 Selecting a Model to View

Note that the Linear Trend model is now highlighted, but the Forecast Model column still shows the Double Exponential Smoothing model as the model chosen to produce the final forecasts for the series. Selecting a model in the list means that this is the model that menu items such as *View Model*, *Delete*, *Edit*, and *Refit* will act upon. Choosing a model by selecting its check box in the Forecast Model column means that this model will be used by the Produce Forecasts process to generate forecasts.

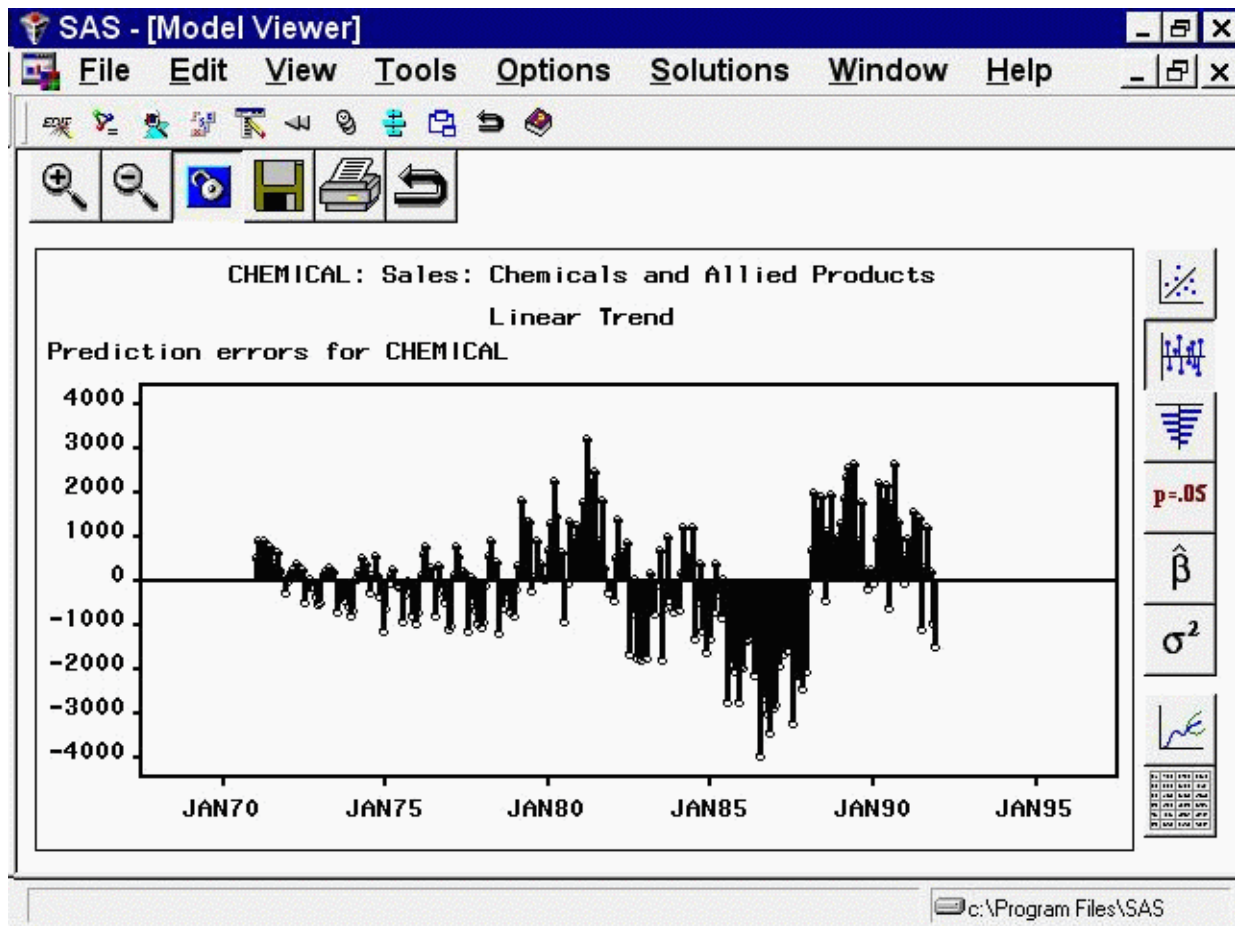
Now open the Model Viewer by selecting the right-hand icon under the Browse button, or by selecting *Model Predictions* in the toolbar or from the View menu. The Model Viewer displays the Linear Trend model, as shown in Figure 43.39.

Figure 43.39 Model Viewer: Actual and Predicted Values Plot

This graph shows the linear trend line representing the model predicted values together with a plot of the actual data values, which fluctuate about the trend line.

Prediction Error Plots

Select the second icon from the top in the vertical toolbar in the Model Viewer window. This switches the Viewer to display a plot of the model prediction errors (actual data values minus the predicted values), as shown in [Figure 43.40](#).

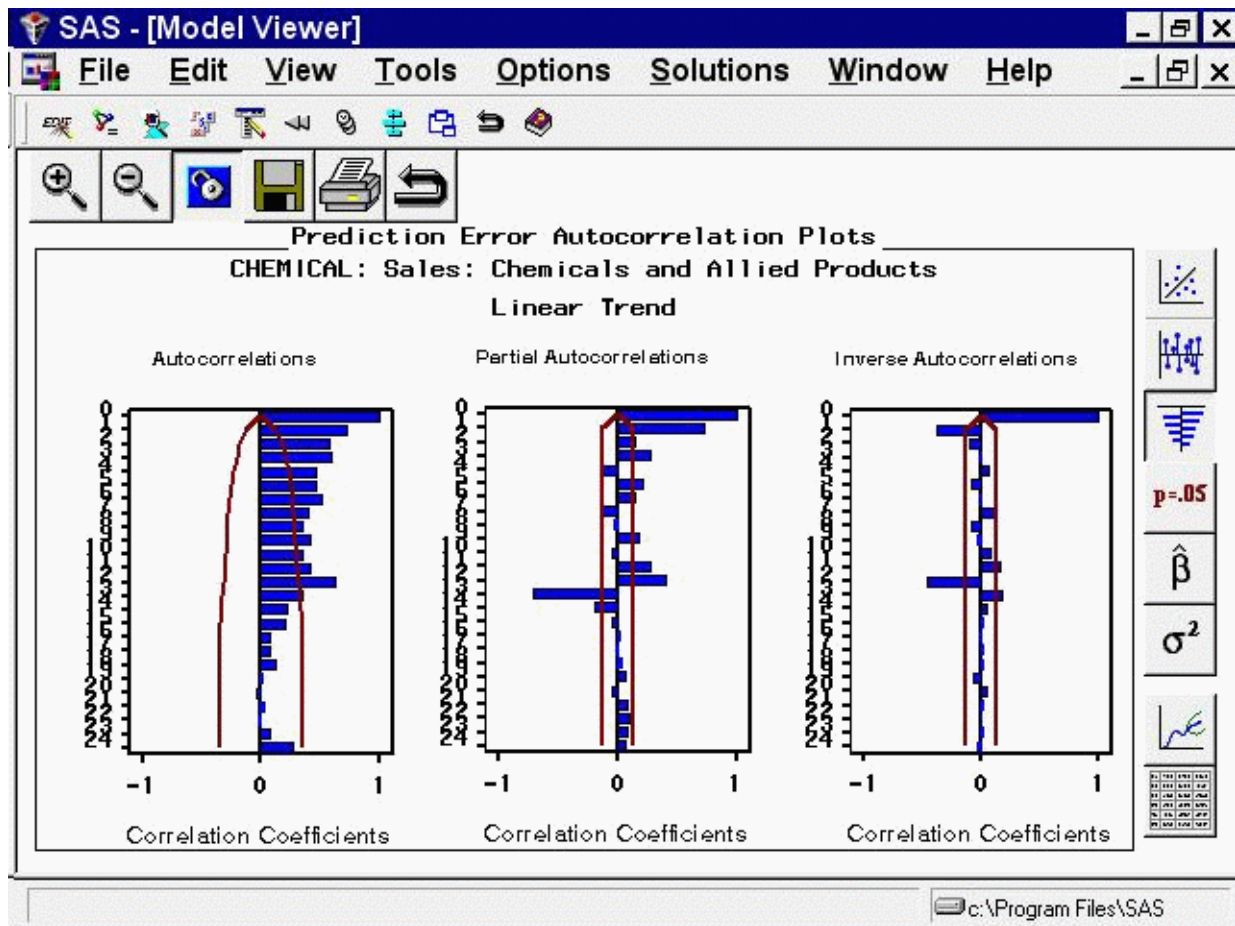
Figure 43.40 Model Viewer: Prediction Errors Plot

If the model being viewed includes a transformation, prediction errors are defined as the difference between the transformed series actual values and model predictions. You can choose to graph instead the difference between the untransformed series values and untransformed model predictions, which are called *model residuals*. You can also graph normalized prediction errors or normalized model residuals. Use the Residual Plot Options submenu under the Options menu.

Autocorrelation Plots

Select the third icon from the top in the vertical toolbar. This switches the Viewer to display a plot of autocorrelations of the model prediction errors at different lags, as shown in [Figure 43.41](#). Autocorrelations, partial autocorrelations, and inverse autocorrelations are displayed, with lines overlaid at plus and minus two standard errors. You can switch the graphs so that the bars represent significance probabilities by selecting the Correlation Probabilities item on the toolbar or from the View menu. For more information about the meaning and use of autocorrelation plots, see Chapter 7, “[The ARIMA Procedure](#).”

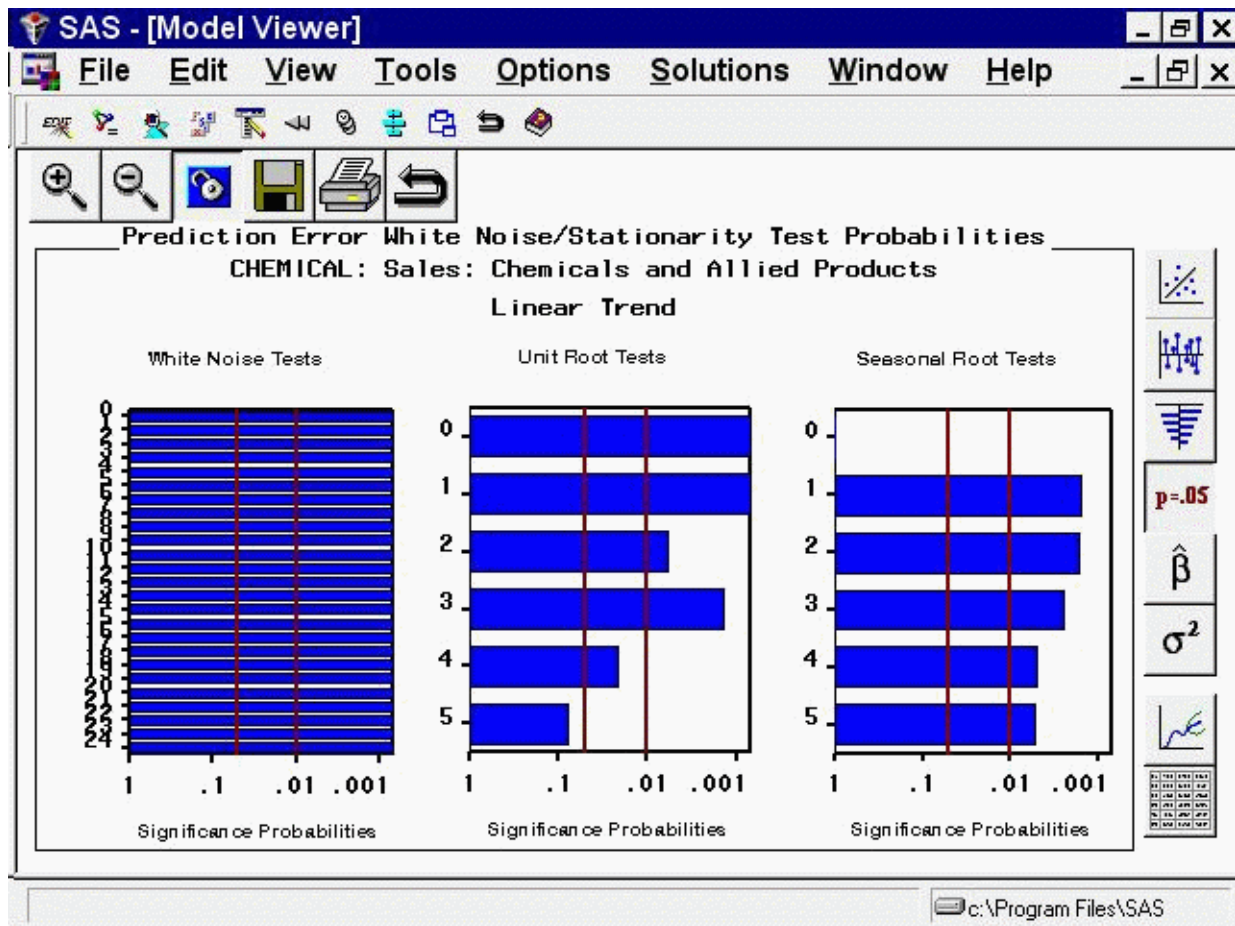
Figure 43.41 Model Viewer: Autocorrelations Plot



White Noise and Stationarity Plots

Select the fourth icon from the top in the vertical toolbar. This switches the Viewer to display a plot of white noise and stationarity tests on the model prediction errors, as shown in Figure 43.42.

Figure 43.42 Model Viewer: White Noise and Stationarity Plot

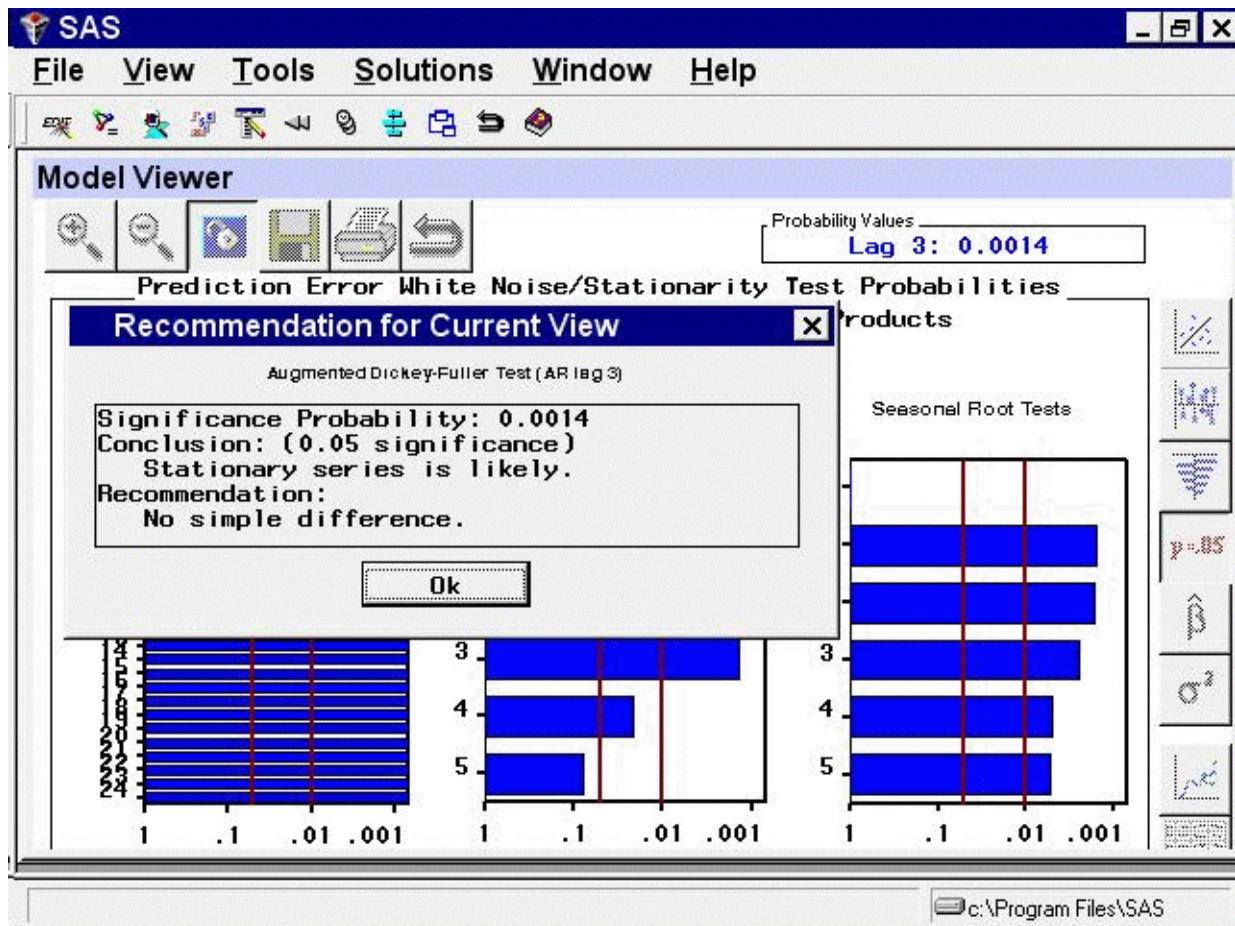


The white noise test bar chart shows significance probabilities of the Ljung-Box chi square statistic. Each bar shows the probability computed on autocorrelations up to the given lag. Longer bars favor rejection of the null hypothesis that the prediction errors represent white noise. In this example, they are all significant beyond the 0.001 probability level, so that you reject the null hypothesis. In other words, the high level of significance at all lags makes it clear that the linear trend model is inadequate for this series.

The second bar chart shows significance probabilities of the augmented Dickey-Fuller test for unit roots. For example, the bar at lag three indicates a probability of 0.0014, so that you reject the null hypothesis that the series is nonstationary. The third bar chart is similar to the second except that it represents the seasonal lags. Since this series has a yearly seasonal cycle, the bars represent yearly intervals.

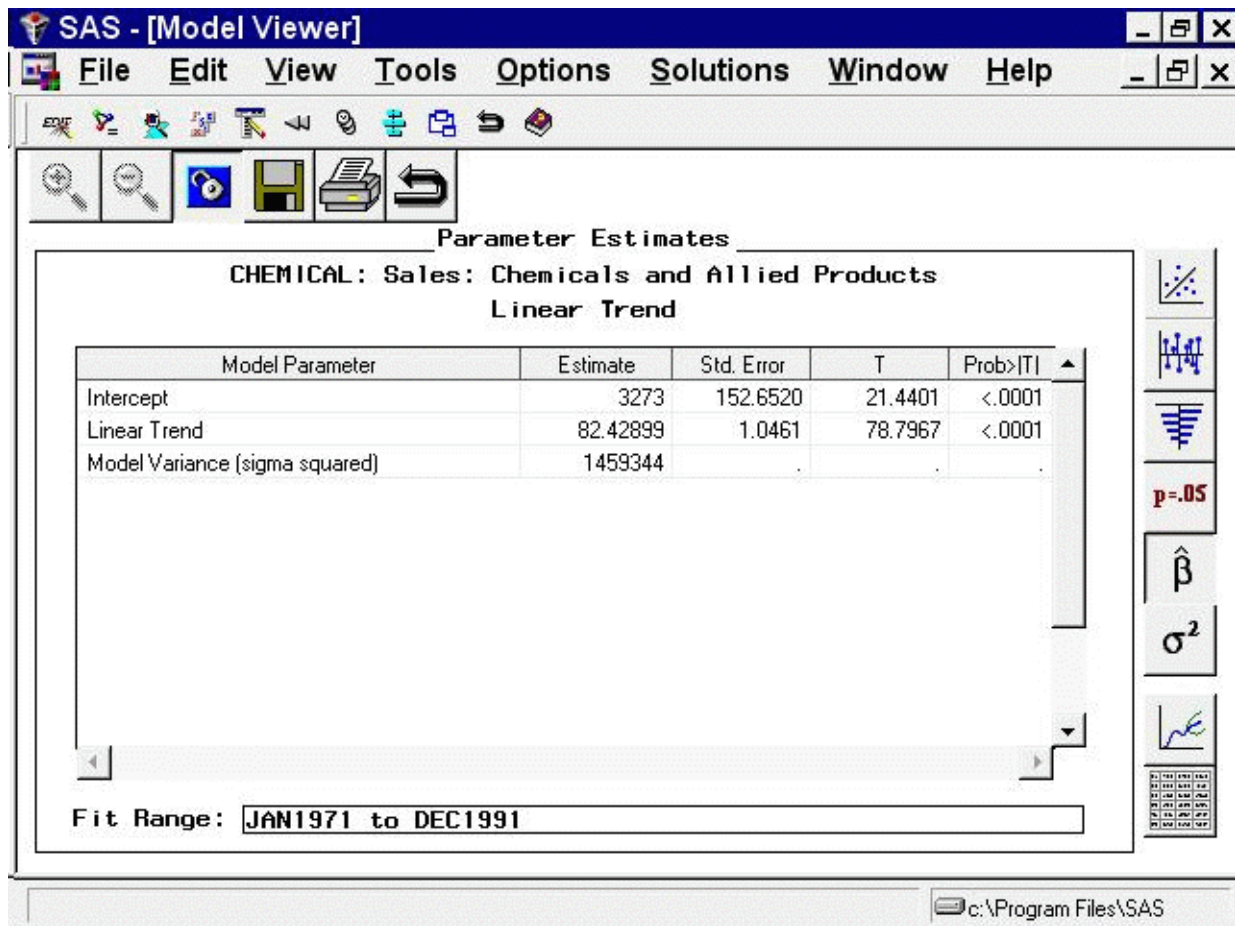
You can select any of the bars to display an interpretation. Select the fourth bar of the middle chart. This displays the *Recommendation for Current View*, as shown in Figure 43.43. This window gives an interpretation of the test represented by the bar that was selected; it is significant, therefore a stationary series is likely. It also gives a recommendation: You do not need to perform a simple difference to make the series stationary.

Figure 43.43 Model Viewer: Recommendation for Current View



Parameter Estimates Table

Select the fifth icon from the top in the vertical toolbar to the right of the graph. This switches the Viewer to display a table of parameter estimates for the fitted model, as shown in Figure 43.44.

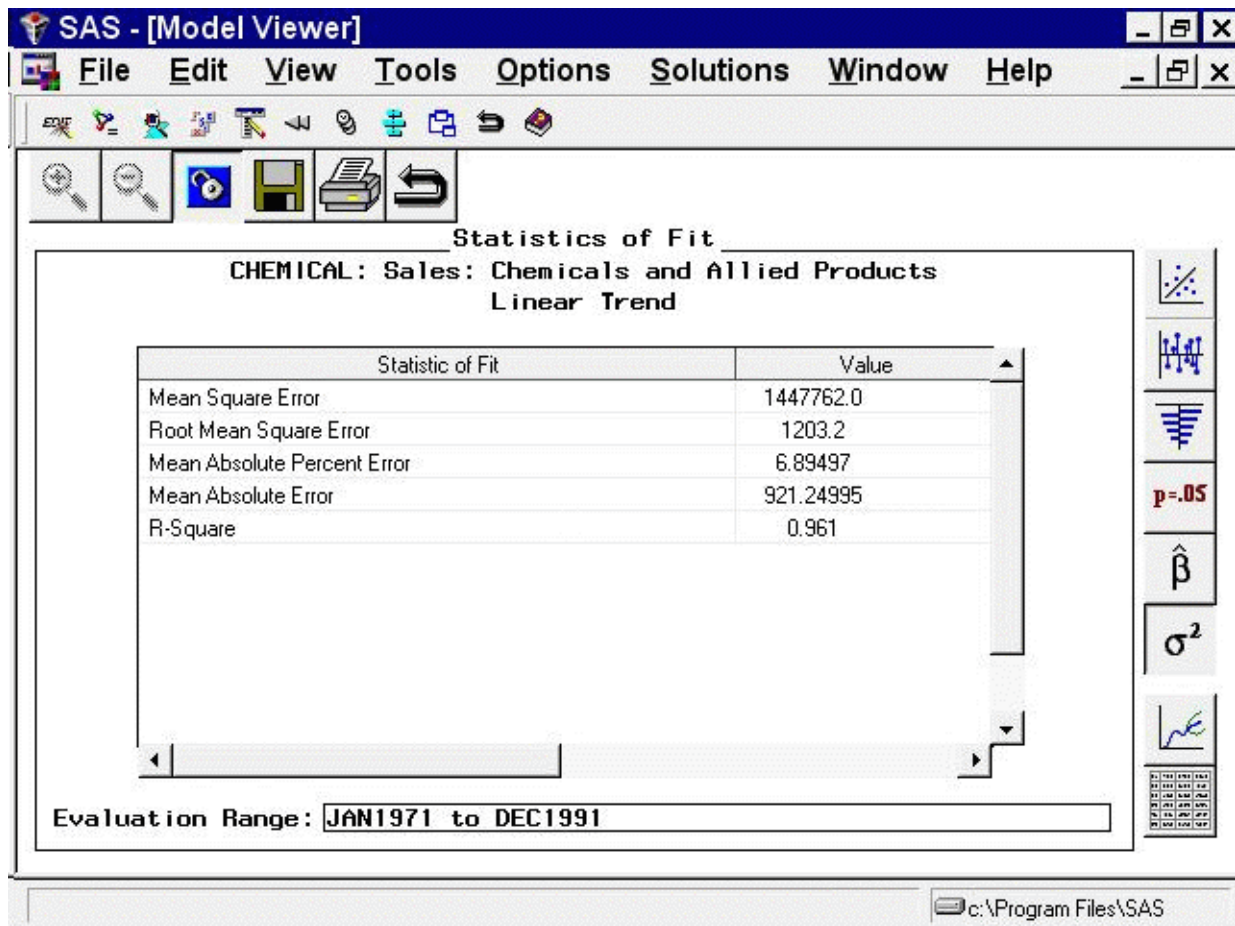
Figure 43.44 Model Viewer: Parameter Estimates Table

For the linear trend model, the parameters are the intercept and slope coefficients. The table shows the values of the fitted coefficients together with standard errors and t tests for the statistical significance of the estimates. The model residual variance is also shown.

Statistics of Fit Table

Select the sixth icon from the top in the vertical toolbar to the right of the table. This switches the Viewer to display a table of statistics of fit computed from the model prediction errors, as shown in [Figure 43.45](#). The list of statistics displayed is controlled by selecting `Statistics of Fit` from the `Options` menu.

Figure 43.45 Model Viewer: Statistics of Fit Table

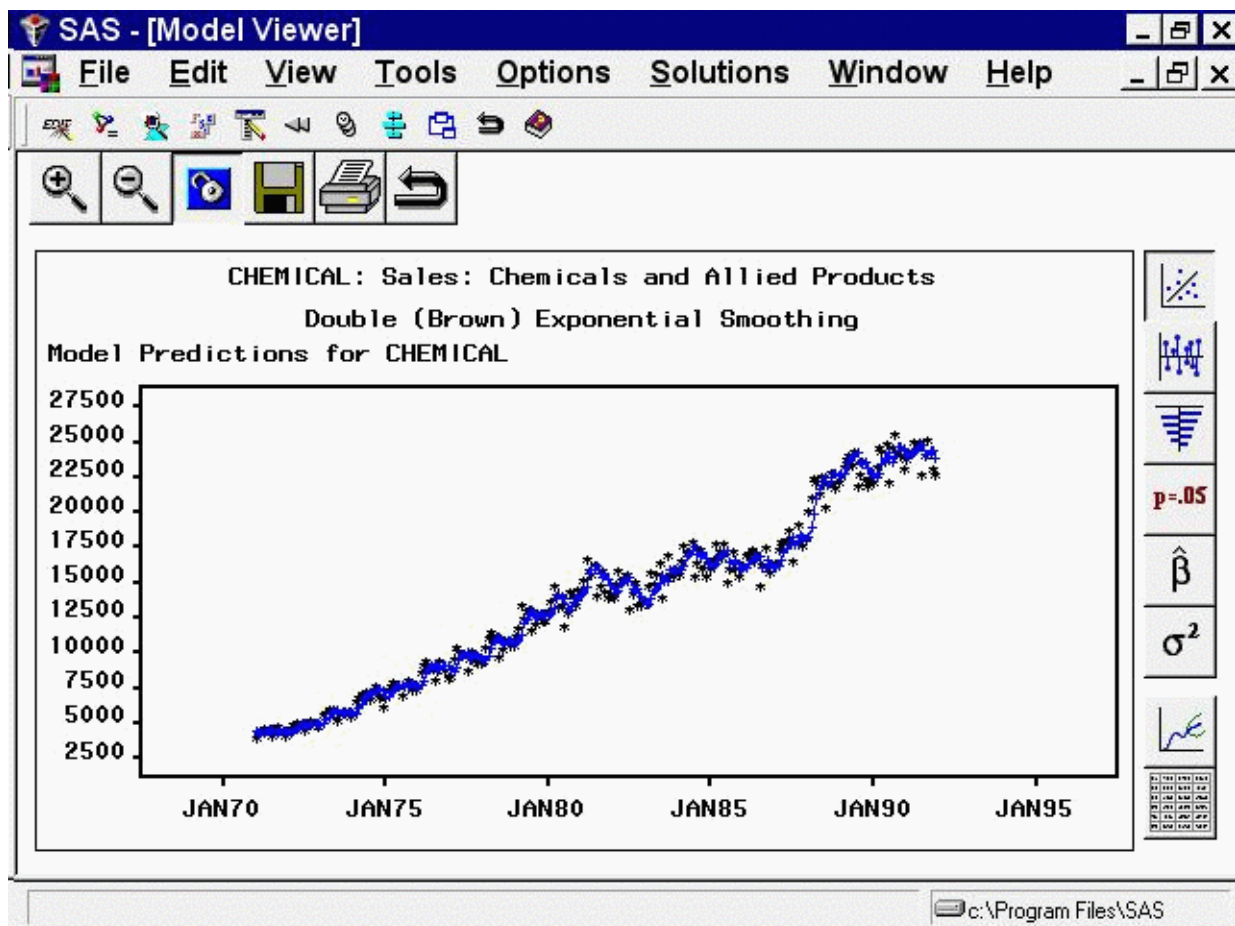


Changing to a Different Model

Select the first icon in the vertical toolbar to the right of the table to return the display to the predicted and actual values plots (Figure 43.39).

Now return to the Develop Models window, but do not close the Model Viewer window. You can use the Next Viewer icon in the toolbar or your system's window manager controls to switch windows. You can resize the windows to make them both visible.

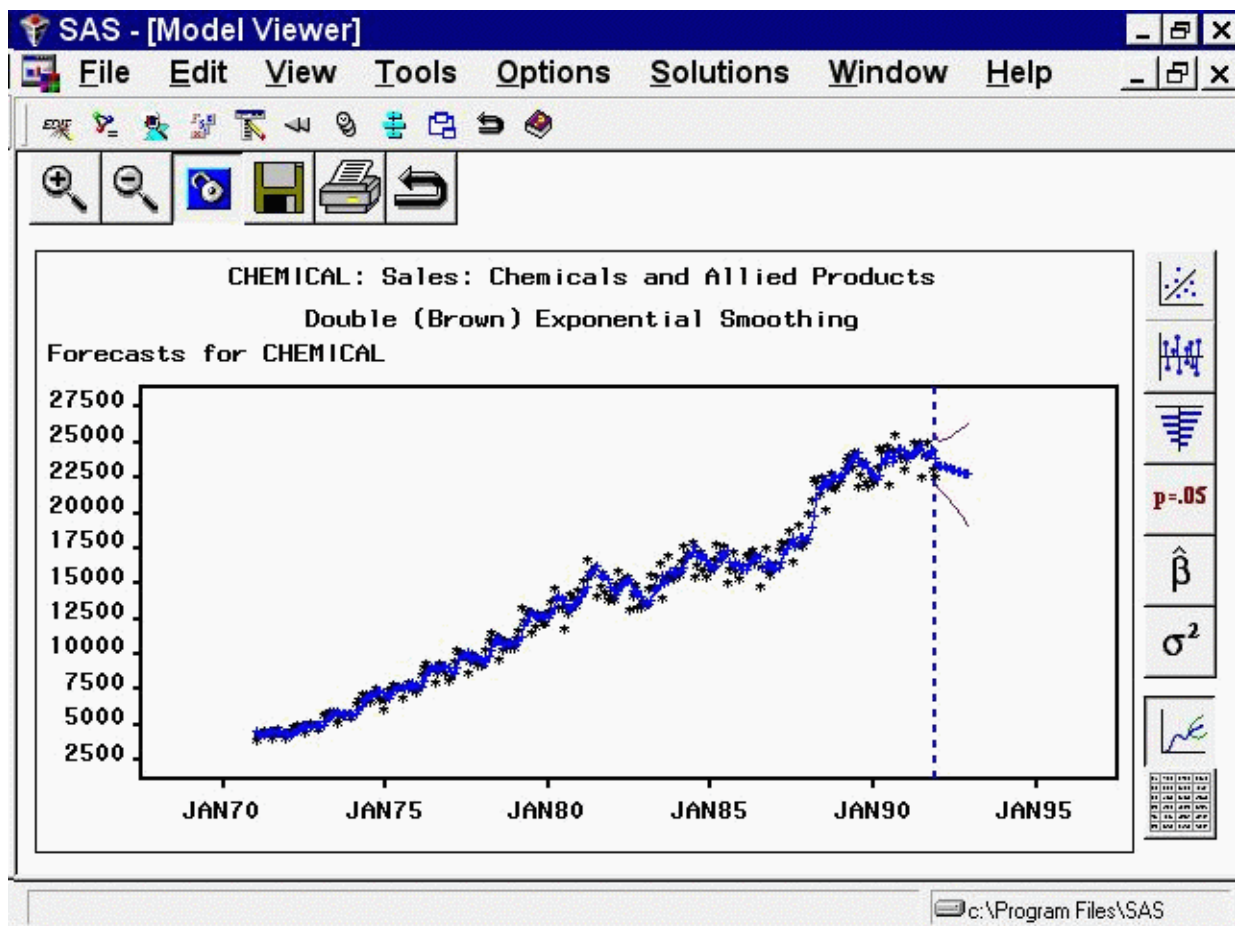
Select the Double Exponential Smoothing model so that this line of the model list is highlighted. The Model Viewer window is now updated to display a plot of the predicted values for the Double Exponential Smoothing model, as shown in Figure 43.46. The Model Viewer is automatically updated to display the currently selected model, unless you specify `Unlink` (the third icon in the window's horizontal toolbar).

Figure 43.46 Model Viewer Plot for Exponential Smoothing Model

Forecasts and Confidence Limits Plots

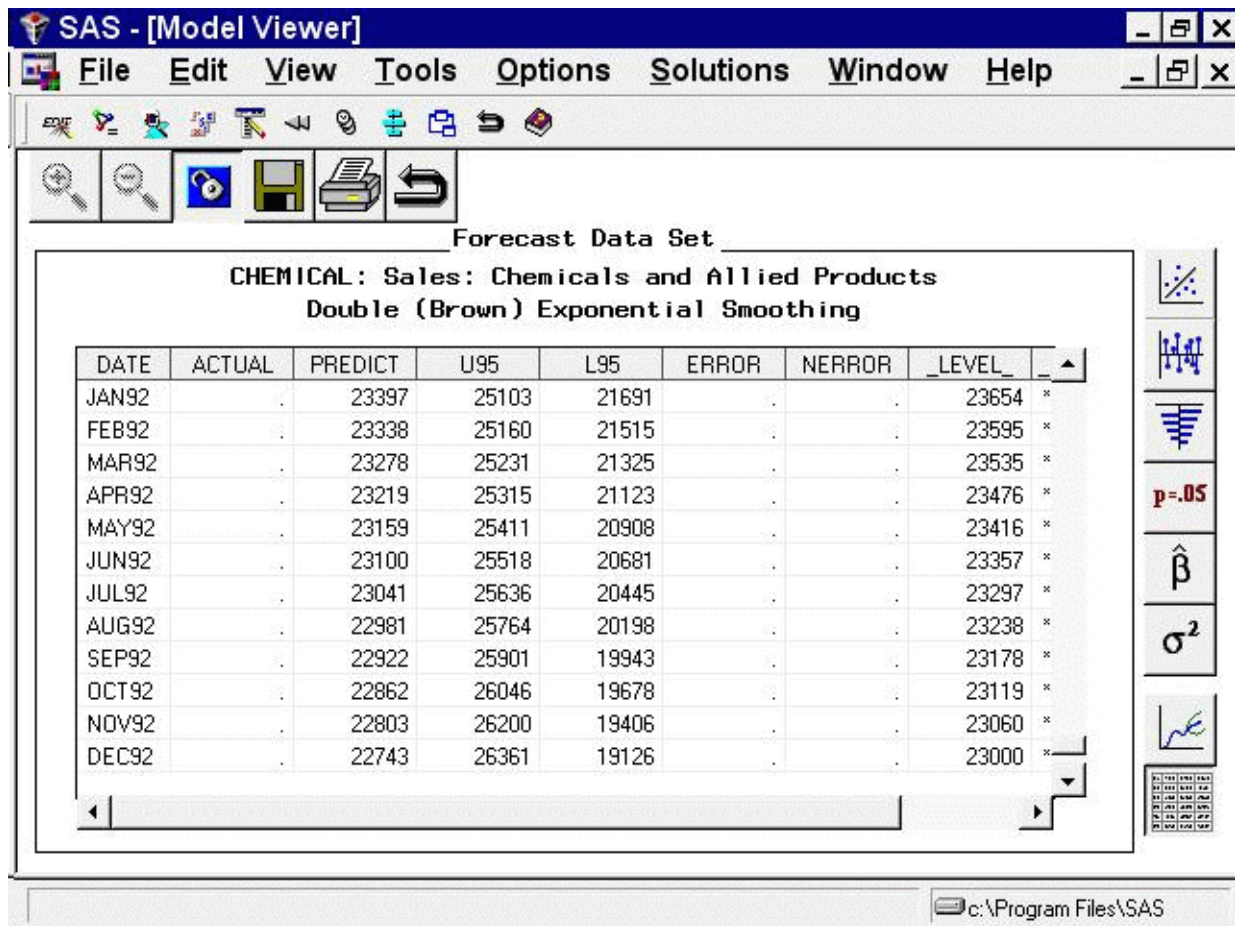
Select the seventh icon from the top in the vertical toolbar to the right of the graph. This switches the Viewer to display a plot of forecast values and confidence limits, together with actual values and one-step-ahead within-sample predictions, as shown in [Figure 43.47](#).

Figure 43.47 Model Viewer: Forecasts and Confidence Limits



Data Table

Select the last icon at the bottom of the vertical toolbar to the right of the graph. This switches the Viewer to display the forecast data set as a table, as shown in [Figure 43.48](#).

Figure 43.48 Model Viewer: Forecast Data Table

To view the full data set, use the vertical and horizontal scroll bars on the data table or enlarge the window.

Closing the Model Viewer

Other features of the Model Viewer and Develop Models window are discussed later in this book. For now, close the Model Viewer window and return to the Time Series Forecasting window.

To close the Model Viewer window, select **Close** from the window's horizontal toolbar or from the File menu.

Chapter 44

Creating Time ID Variables

Contents

Creating a Time ID Value from a Starting Date and Frequency	2881
Using Observation Numbers as the Time ID	2885
Creating a Time ID from Other Dating Variables	2889

The Forecasting System requires that the input data set contain a time ID variable. If the data you want to forecast are not in this form, you can use features of the Forecasting System to help you add time ID variables to your data set. This chapter shows examples of how to use these features.

Creating a Time ID Value from a Starting Date and Frequency

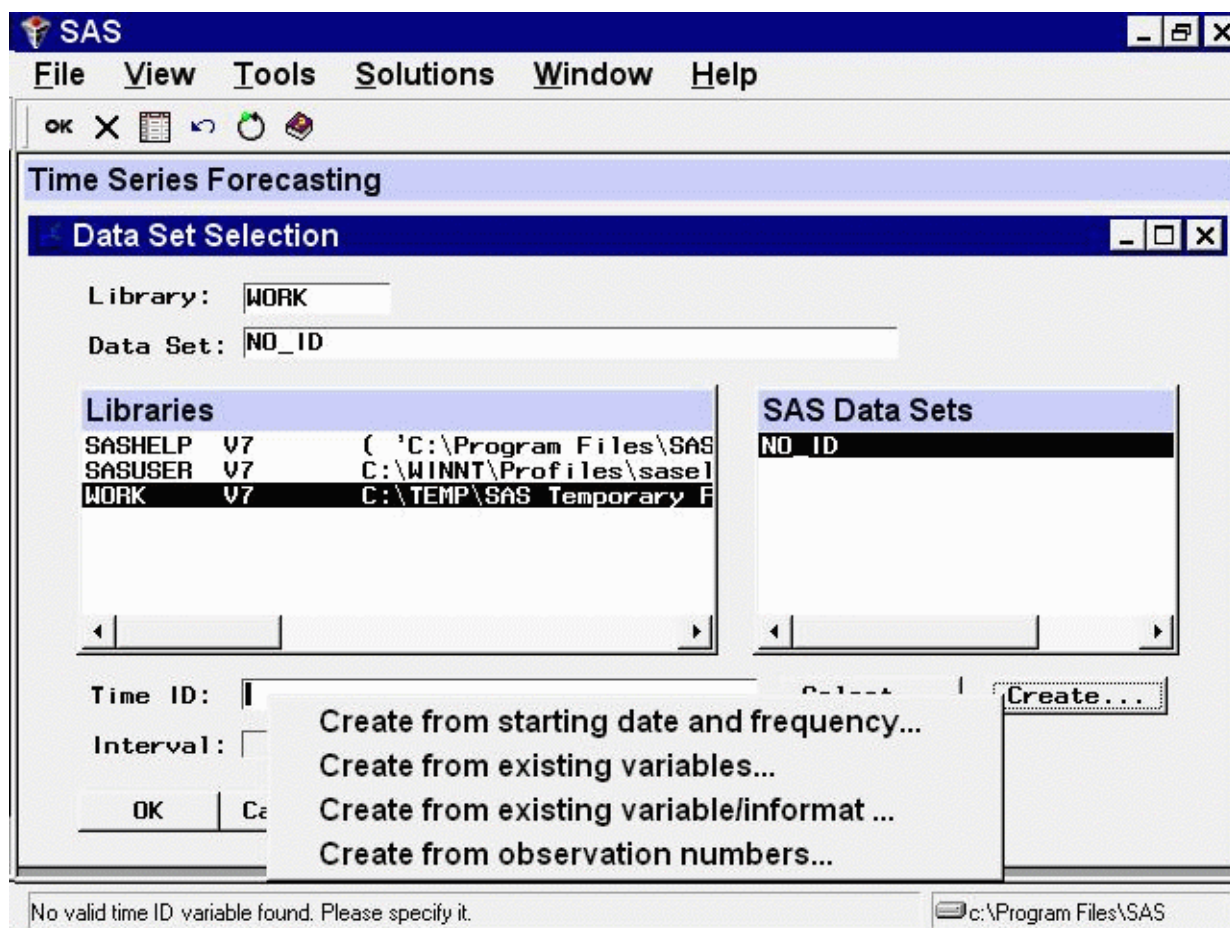
As a first example of adding a time ID variable, use the SAS data set created by the following statements. (Or use your own data set if you prefer.)

```
data no_id;
  input y @@;
datalines;
  10 15 20 25 30 35 40 45
  50 55 60 65 70 75 80 85
run;
```

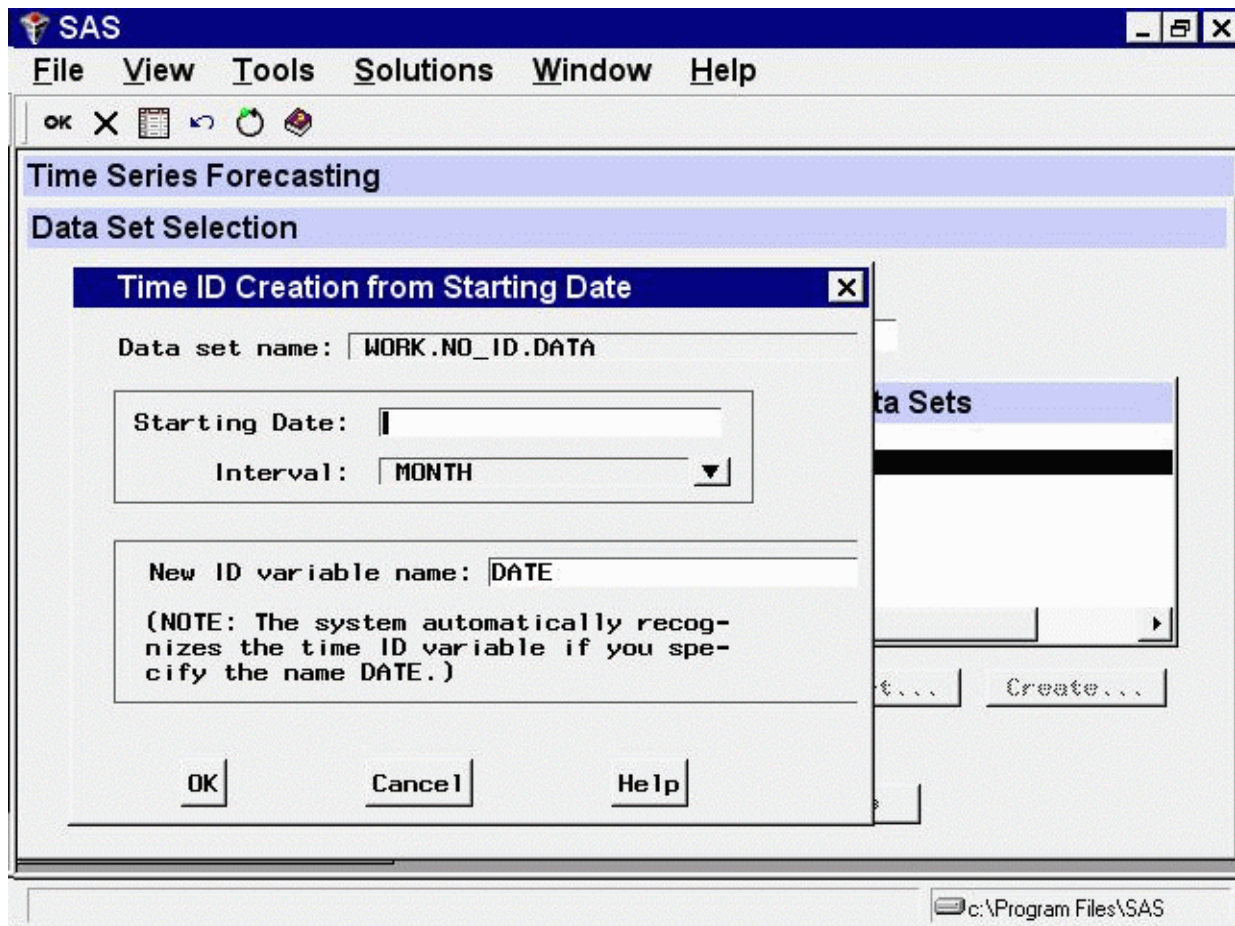
Submit these SAS statements to create the data set NO_ID. This data set contains the single variable Y. Assume that Y is a quarterly series and starts in the first quarter of 1991.

In the Time Series Forecasting window, use the Browse button to the right of the Data set field to bring up the Data Set Selection window. Select the WORK library, and then select the NO_ID data set.

You must create a time ID variable for the data set. Click the Create button to the right of the Time ID field. This opens a menu of choices for creating the Time ID variable, as shown in [Figure 44.1](#).

Figure 44.1 Time ID Creation Popup Menu

Select the first choice, Create from starting date and frequency. This opens the Time ID Creation from Starting Date window shown in Figure 44.2.

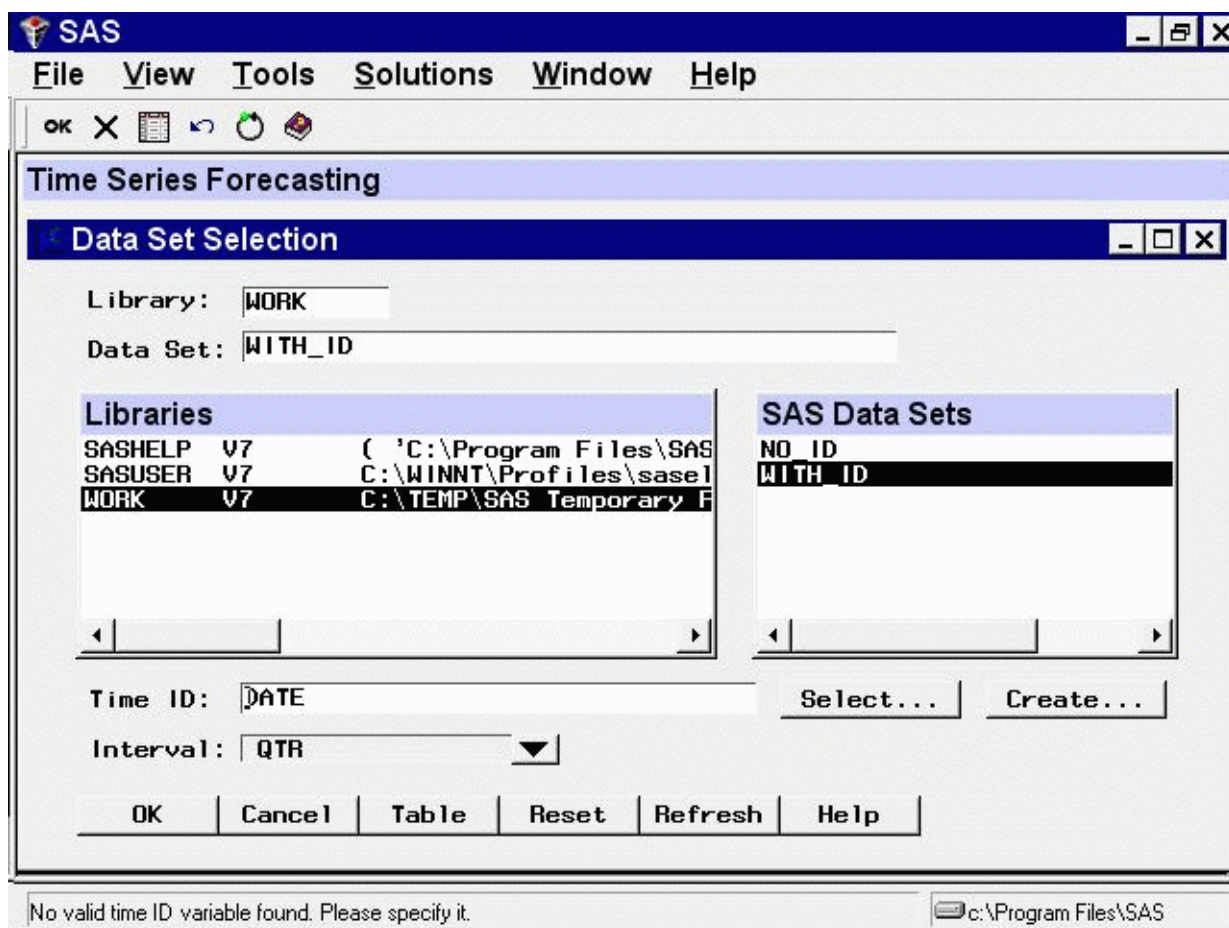
Figure 44.2 Time ID Creation from Starting Date Window

Enter the starting date, 1991:1, in the *Starting Date* field.

Select the *Interval* list arrow and select QTR. The *Interval* value QTR means that the time interval between successive observations is a quarter of a year; that is, the data frequency is quarterly.

Now select the *OK* button. The system prompts you for the name of the new data set. If you want to create a new copy of the input data set with the *DATE* variable added, enter a name for the new data set. If you want to replace the *NO_ID* data set with the new copy containing *DATE*, just select the *OK* button without changing the name.

For this example, change the *New name* field to *WITH_ID* and select the *OK* button. The data set *WITH_ID* is created containing the series *Y* from *NO_ID* and the added ID variable *DATE*. The system returns to the *Data Set Selection* window, which now appears as shown in [Figure 44.3](#).

Figure 44.3 Data Set Selection Window after Creating Time ID

Select the **Table** button to see the new data set `WITH_ID`. This opens a **VIEWTABLE** window for the data set `WITH_ID`, as shown in [Figure 44.4](#). Select **File** and **Close** to close the **VIEWTABLE** window.

Figure 44.4 Viewtable Display of Data Set with Time ID Added

	DATE	y
1	1991:1	10
2	1991:2	15
3	1991:3	20
4	1991:4	25
5	1992:1	30
6	1992:2	35
7	1992:3	40
8	1992:4	45
9	1993:1	50
10	1993:2	55
11	1993:3	60
12	1993:4	65
13	1994:1	70
14	1994:2	75
15	1994:3	80
16	1994:4	85

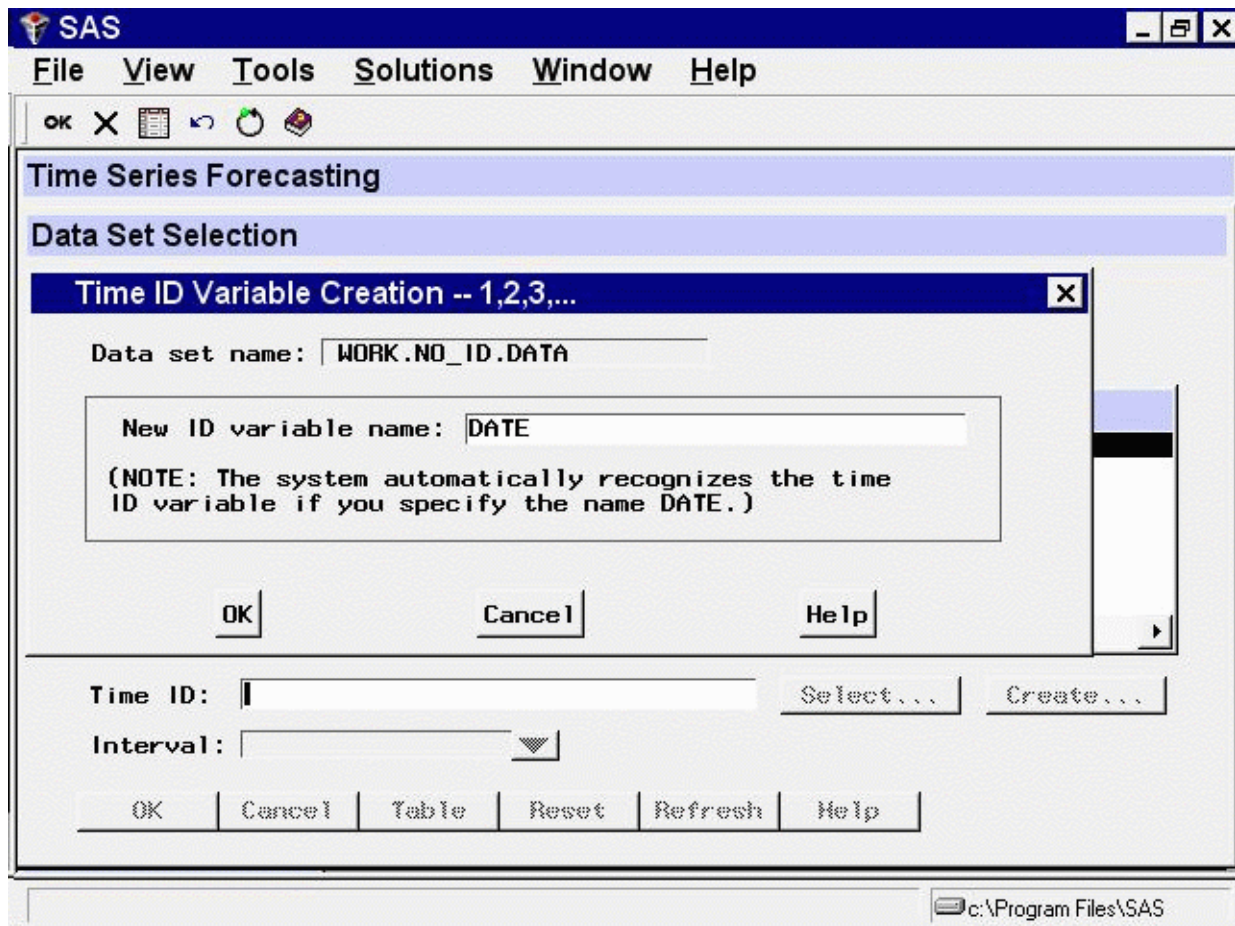
NOTE: Table has been opened in browse mode.

c:\Program Files\SAS

Using Observation Numbers as the Time ID

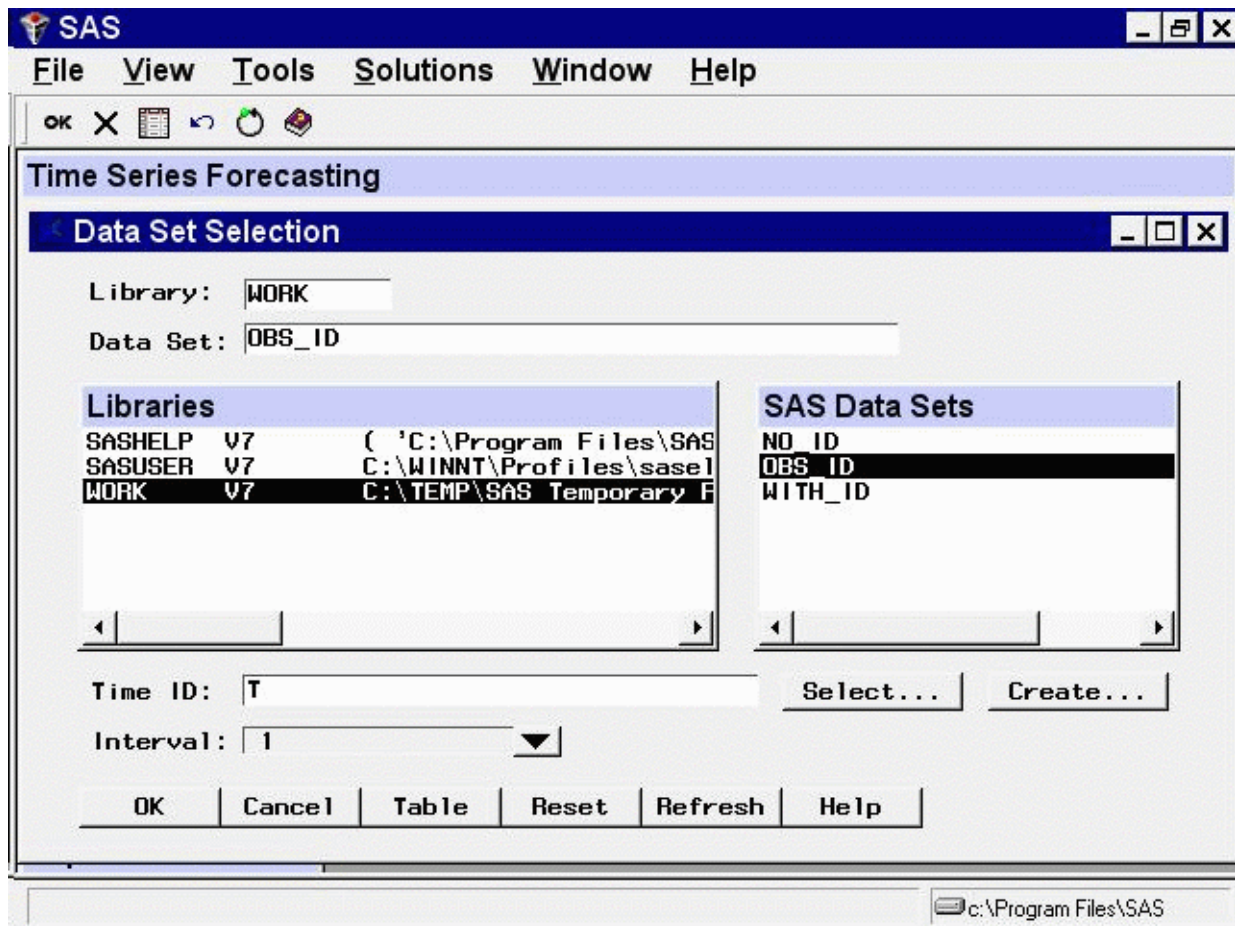
Normally, the time ID variable contains date values. If you do not want to have dates associated with your forecasts, you can also use observation numbers as time ID variables. However, you still must have an ID variable. This can be illustrated by adding an observation index time ID variable to the data set NO_ID.

In the Data Set Selection window, select the data set NO_ID again. Select the Create button to the right of the Time ID field. Select the fourth choice, Create from observation numbers. This opens the Time ID Variable Creation window shown in Figure 44.5.

Figure 44.5 Create Time ID Variable Window

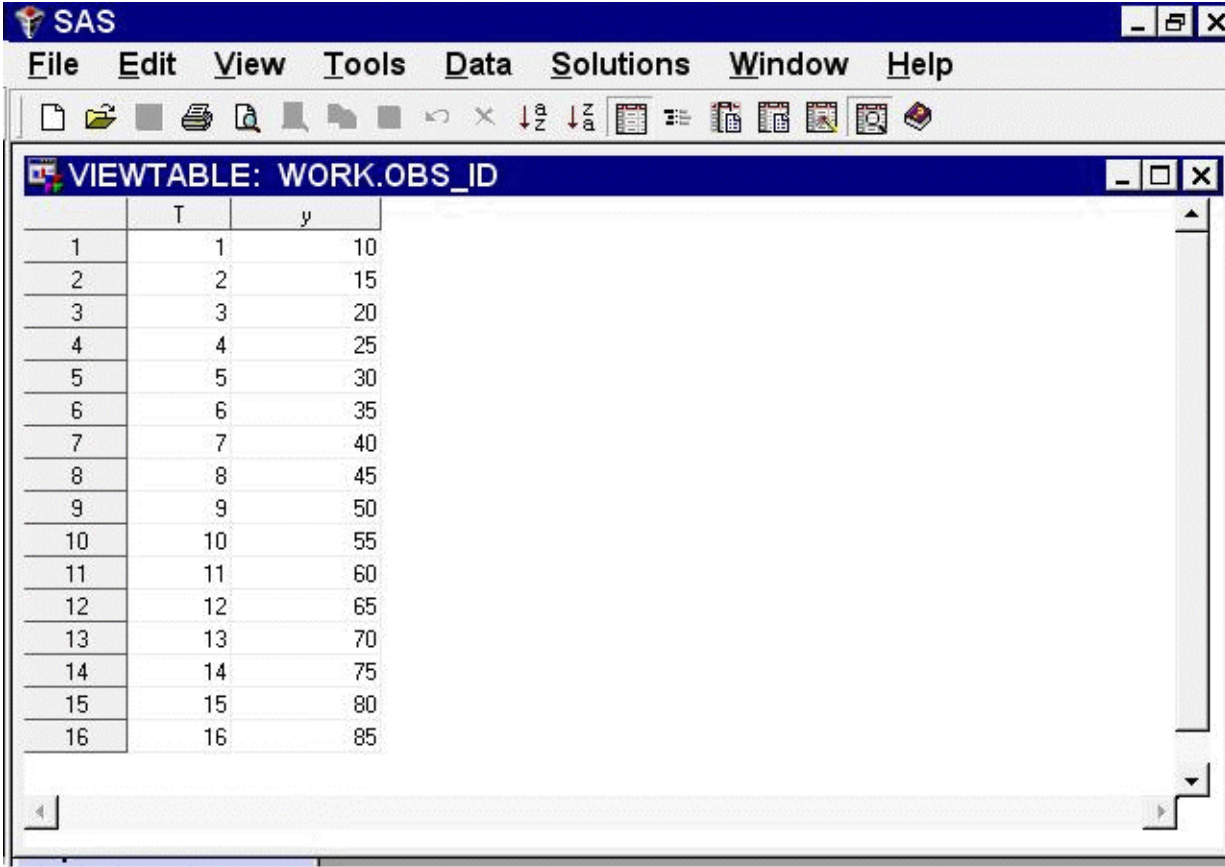
Select the OK button. This opens the New Data Set Name window. Enter "OBS_ID" in the New data set name field. Enter "T" in the New ID variable name field.

Now select the OK button. The new data set OBS_ID is created, and the system returns to the Data Set Selection window, which now appears as shown in [Figure 44.6](#).

Figure 44.6 Data Set Selection Window after Creating Time ID

The `Interval` field for `OBS_ID` has the value '1'. This means that the values of the time ID variable `T` increment by one between successive observations.

Select the `Table` button to look at the `OBS_ID` data set, as shown in [Figure 44.7](#).

Figure 44.7 VIEWTABLE of Data Set with Observation Index ID

The screenshot shows the SAS VIEWTABLE window for the data set WORK.OBS_ID. The window has a menu bar (File, Edit, View, Tools, Data, Solutions, Window, Help) and a toolbar. The table displayed has 16 rows and 3 columns. The first column is labeled 'T', the second is labeled 'y', and the third is unlabeled. The data is as follows:

	T	y	
1	1	10	
2	2	15	
3	3	20	
4	4	25	
5	5	30	
6	6	35	
7	7	40	
8	8	45	
9	9	50	
10	10	55	
11	11	60	
12	12	65	
13	13	70	
14	14	75	
15	15	80	
16	16	85	

At the bottom of the window, a status bar displays the text: NOTE: Table has been opened in browse mode. The path c:\Program Files\SAS is also visible.

Select **File** and **Close** to close the VIEWTABLE window. Select the **OK** button from the Data Set Selection window to return to the Time Series Forecasting window.

Creating a Time ID from Other Dating Variables

Your data set might contain ID variables that date the observations in a different way than the SAS date valued ID variable expected by the forecasting system. For example, for monthly data, the data set might contain the ID variables YEAR and MONTH, which together date the observations.

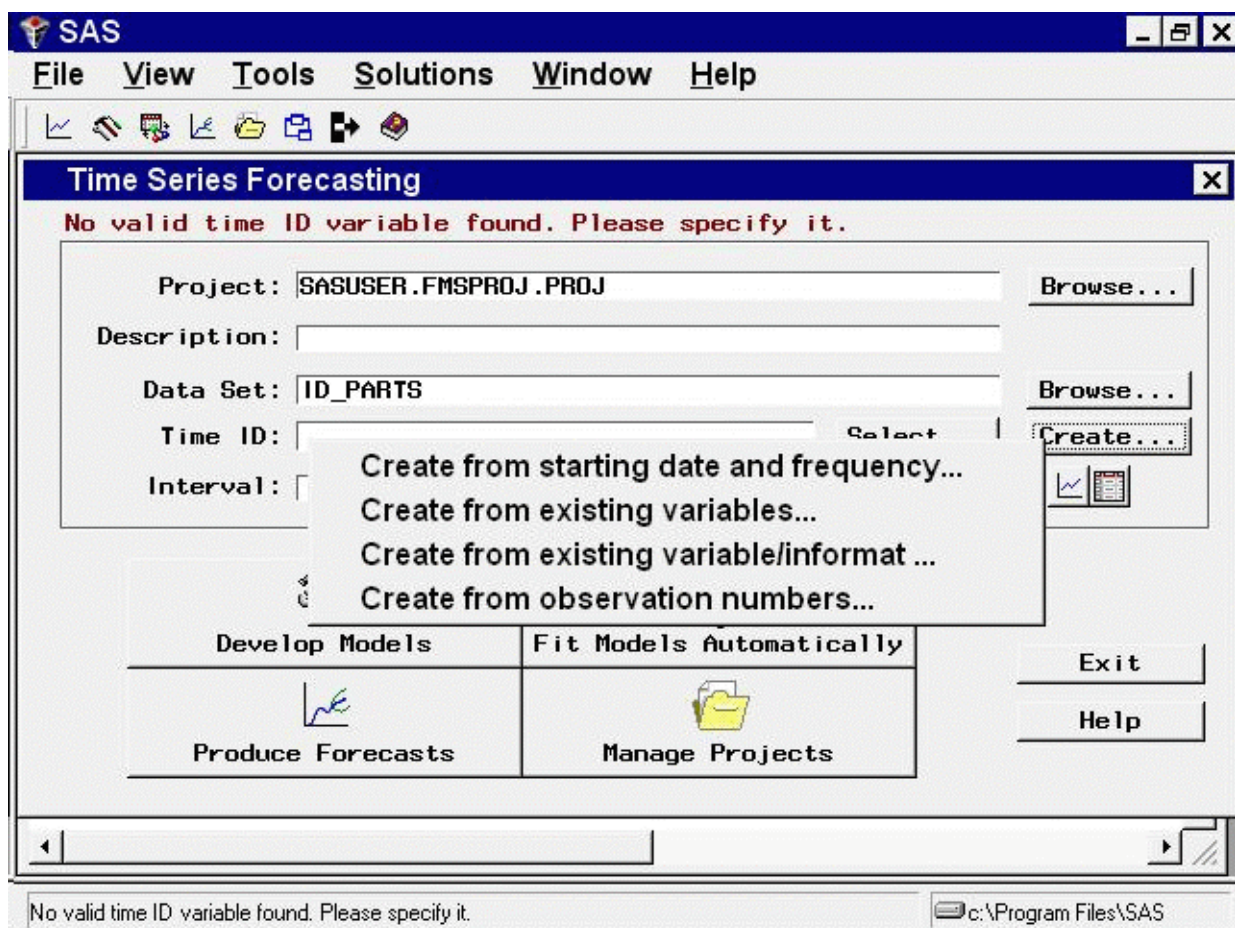
In these cases, you can use the Forecasting System's Create Time ID features to compute a time ID variable with SAS date values from the existing dating variables. As an example of this, use the SAS data set read in by the following SAS statements:

```
data id_parts;  
    input yr qtr y;  
datalines;  
91 1 10  
91 2 15  
91 3 20  
91 4 25  
92 1 30  
92 2 35  
92 3 40  
92 4 45  
93 1 50  
93 2 55  
93 3 60  
93 4 65  
94 1 70  
94 2 75  
94 3 80  
94 4 85  
run;
```

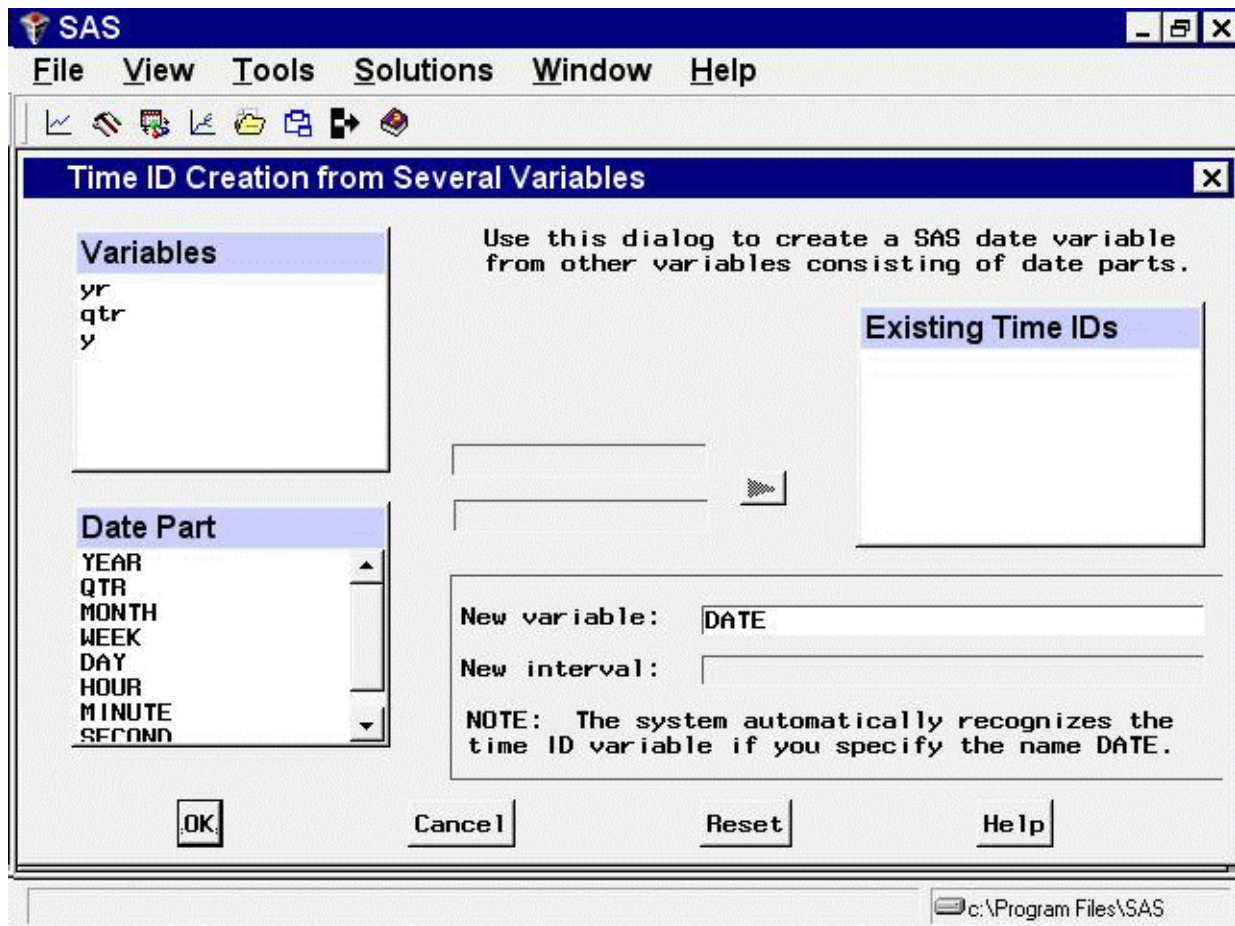
Submit these SAS statements to create the data set ID_PARTS. This data set contains the three variables YR, QTR, and Y. YR and QTR are ID variables that together date the observations, but each variable provides only part of the date information. Because the forecasting system requires a single dating variable containing SAS date values, you need to combine YR and QTR to create a single variable DATE.

Type "ID_PARTS" in the **Data Set** field and press the ENTER key. (You could also use the Browse button to open the Data Set Selection window, as in the previous example, and complete this example from there.)

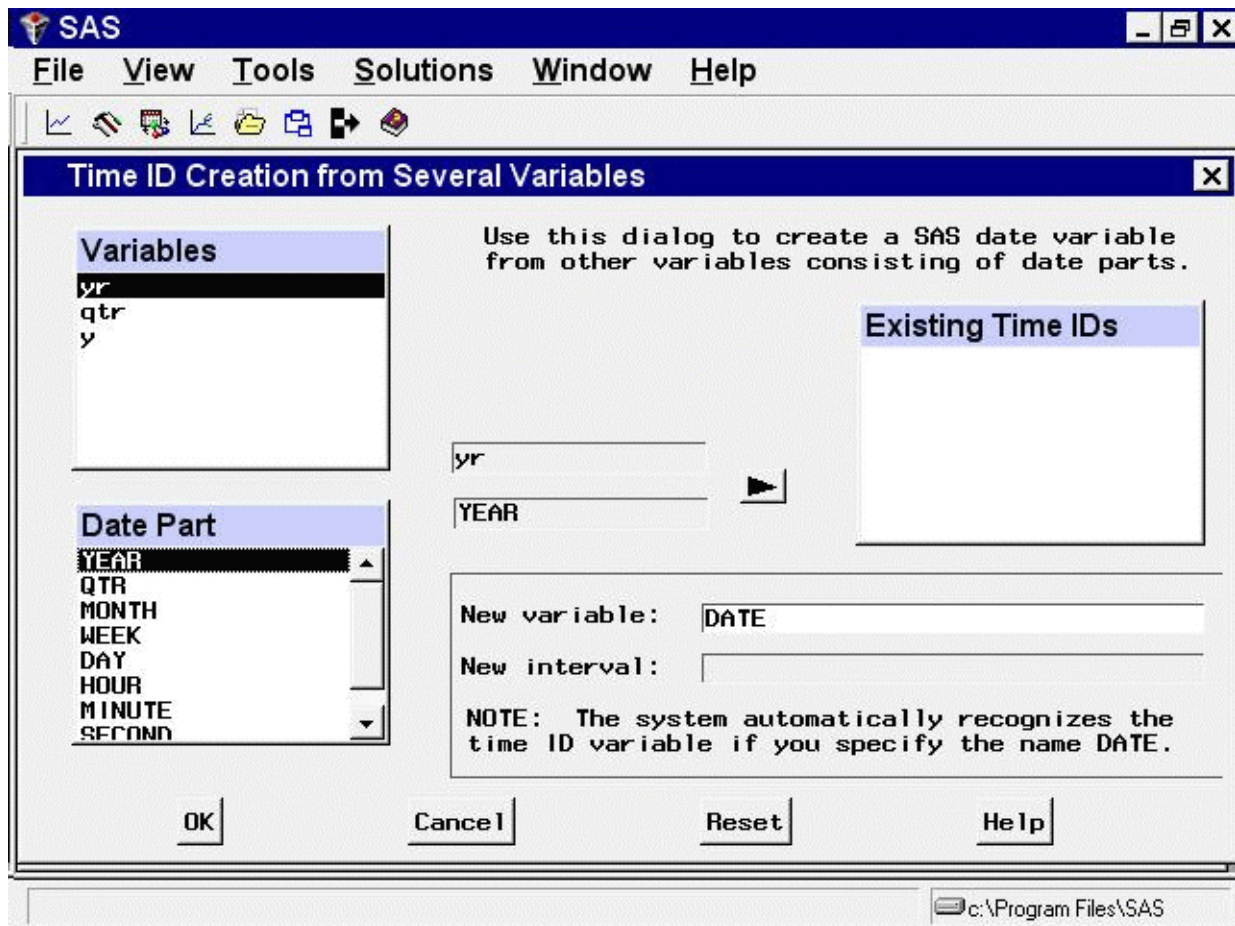
Select the Create button at the right of the **Time ID** field. This opens the menu of Create Time ID choices, as shown in [Figure 44.8](#).

Figure 44.8 Adding a Time ID Variable

Select the second choice, *Create from existing variables*. This opens the window shown in Figure 44.9.

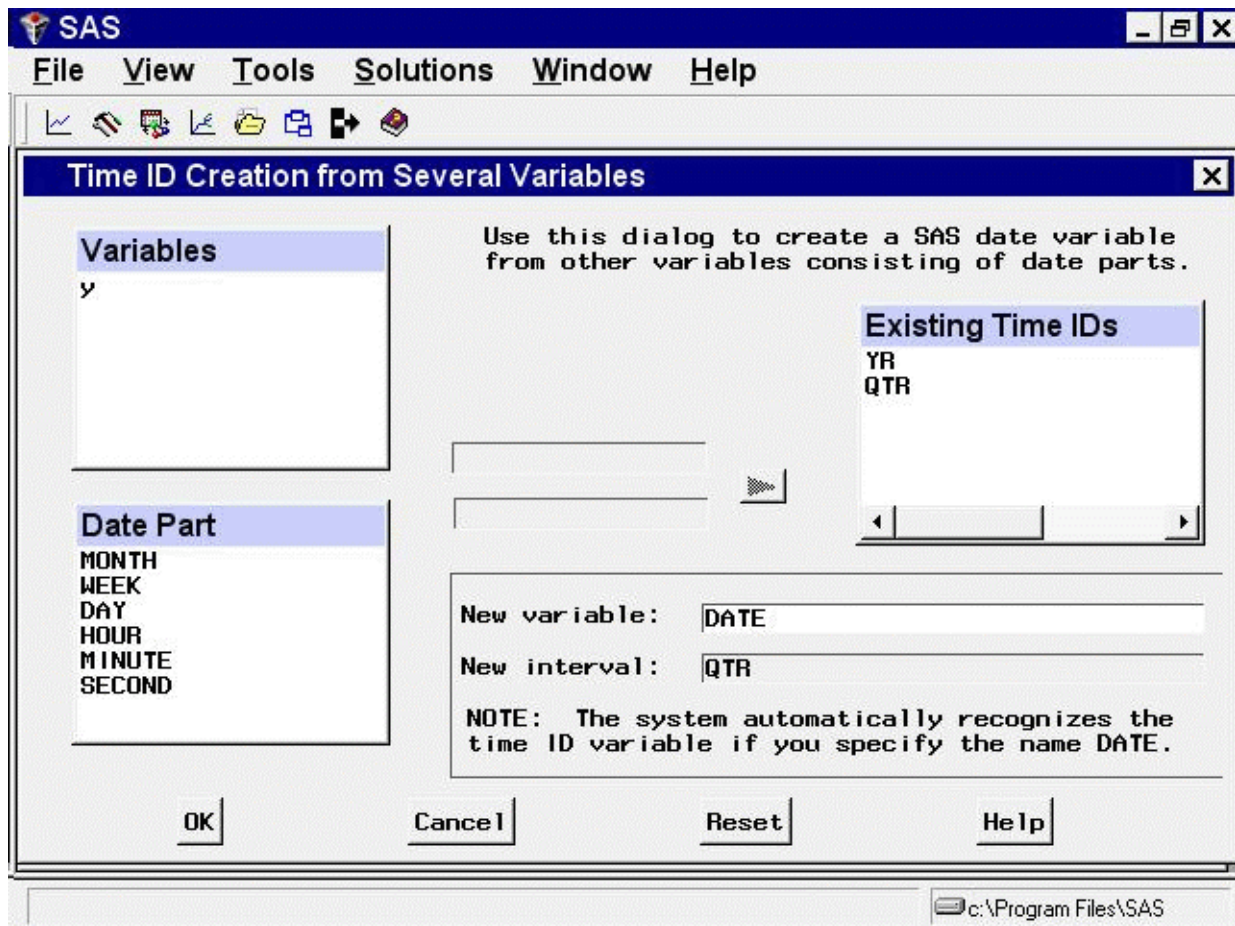
Figure 44.9 Creating a Time ID Variable from Date Parts

In the `Variables` list, select `YR`. In the `Date Part` list, select `YEAR` as shown in [Figure 44.10](#).

Figure 44.10 Specifying the ID Variable for Years

Now click the right-pointing arrow button. The variable YR and the part code YEAR are added to the Existing Time IDs list.

Next select QTR from the Variables list, select QTR from the Date Part list, and click the arrow button. This adds the variable QTR and the part code QTR to the Existing Time IDs list, as shown in Figure 44.11.

Figure 44.11 Creating a Time ID Variable from Date Parts

Now select the **OK** button. This opens the **New Data Set Name** window. Change the **New data set name** field to **NEWDATE**, and then select the **OK** button.

The data set **NEWDATE** is created, and the system returns to the **Time Series Forecasting** window with **NEWDATE** as the selected Data Set. The **Time ID** field is set to **DATE**, and the **Interval** field is set to **QTR**.

Chapter 45

Specifying Forecasting Models

Contents

Series Diagnostics	2895
Models to Fit Window	2899
Automatic Model Selection	2901
Smoothing Model Specification Window	2904
ARIMA Model Specification Window	2907
Factored ARIMA Model Specification Window	2911
Custom Model Specification Window	2914
Editing the Model Selection List	2921
Forecast Combination Model Specification Window	2924
Incorporating Forecasts from Other Sources	2927

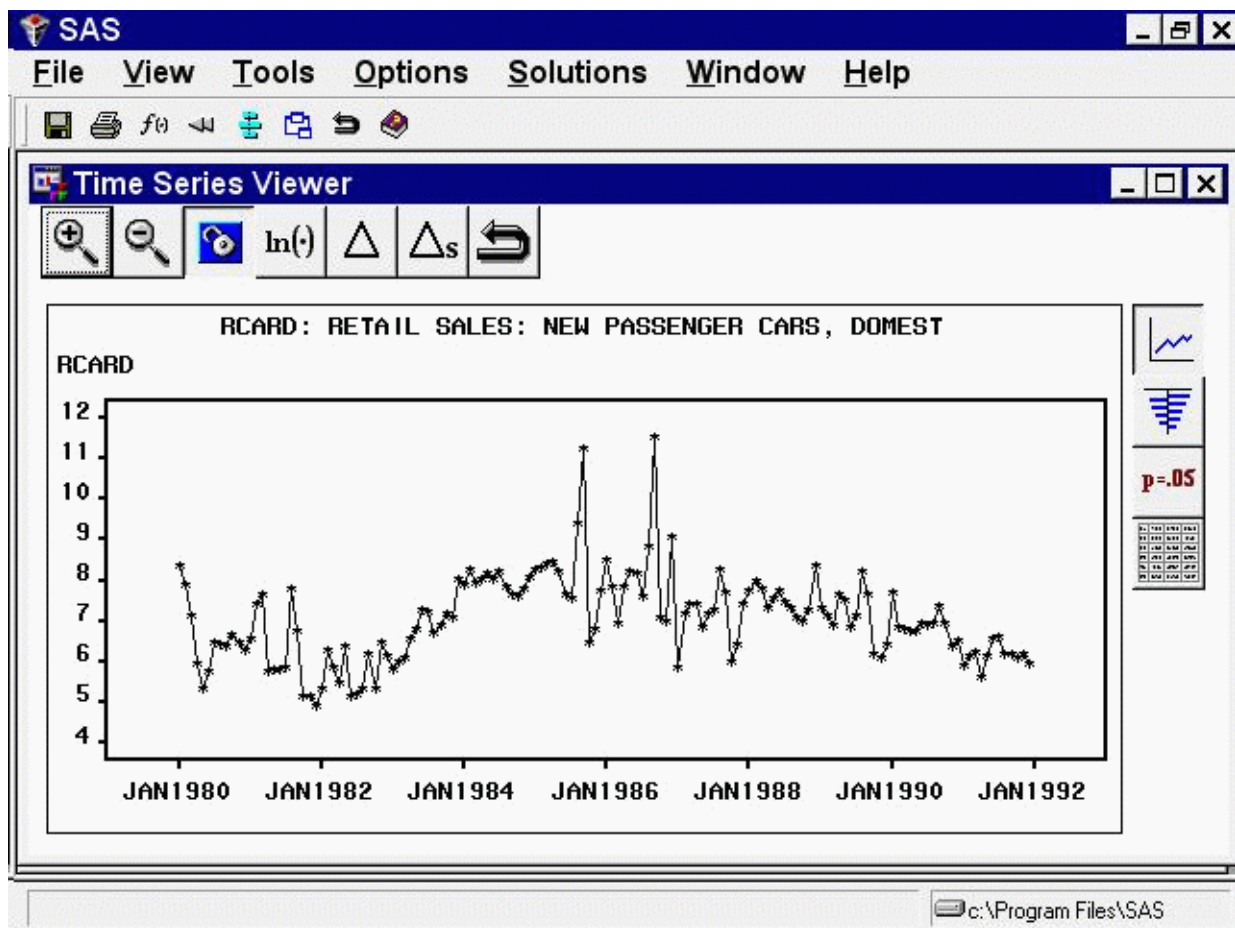
This chapter explores the tools available through the Develop Models window for investigating the properties of time series and for specifying and fitting models. The first section shows you how to diagnose time series properties in order to determine the class of models appropriate for forecasting series with such properties. Later sections show you how to specify and fit different kinds of forecasting models.

Series Diagnostics

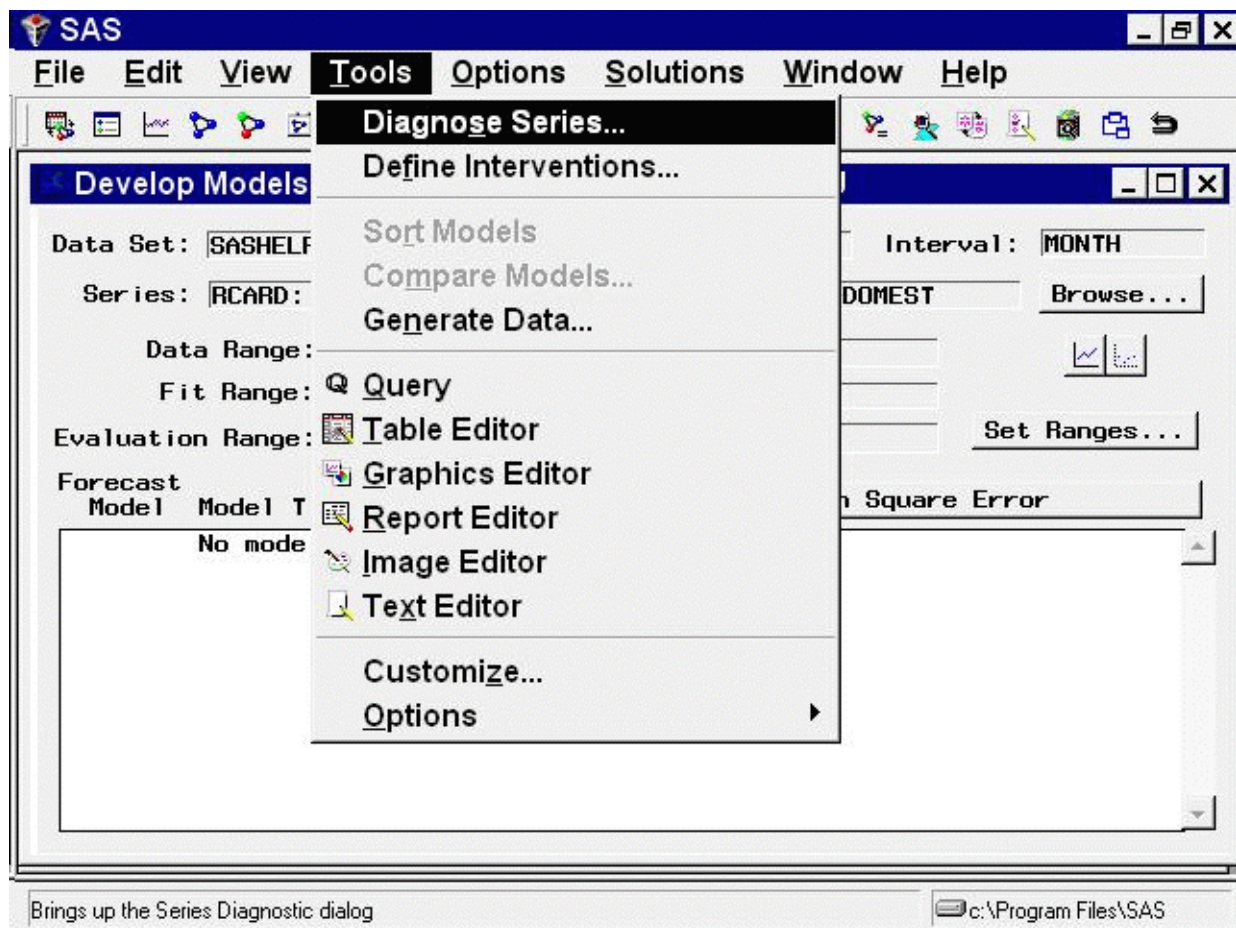
The series diagnostics tool helps you determine the kinds of forecasting models that are appropriate for the data series so that you can limit the search for the best forecasting model. The series diagnostics address these three questions: Is a log transformation needed to stabilize the variance? Is a time trend present in the data? Is there a seasonal pattern to the data?

The automatic model fitting process, which you used in the previous chapter through the Automatic Model Fitting window, performs series diagnostics and selects trial models from a list according to the results. You can also look at the diagnostic information and make your own decisions as to the kinds of models appropriate for the series. The following example illustrates the series diagnostics features.

Select “Develop Models” from the Time Series Forecasting window. Select the library SASHELP, the data set CITIMON, and the series RCARD. This series represents domestic retail sales of passenger cars. To look at this series, select “View Series” from the Develop Models window. This opens the Time Series Viewer window, as shown in [Figure 45.1](#).

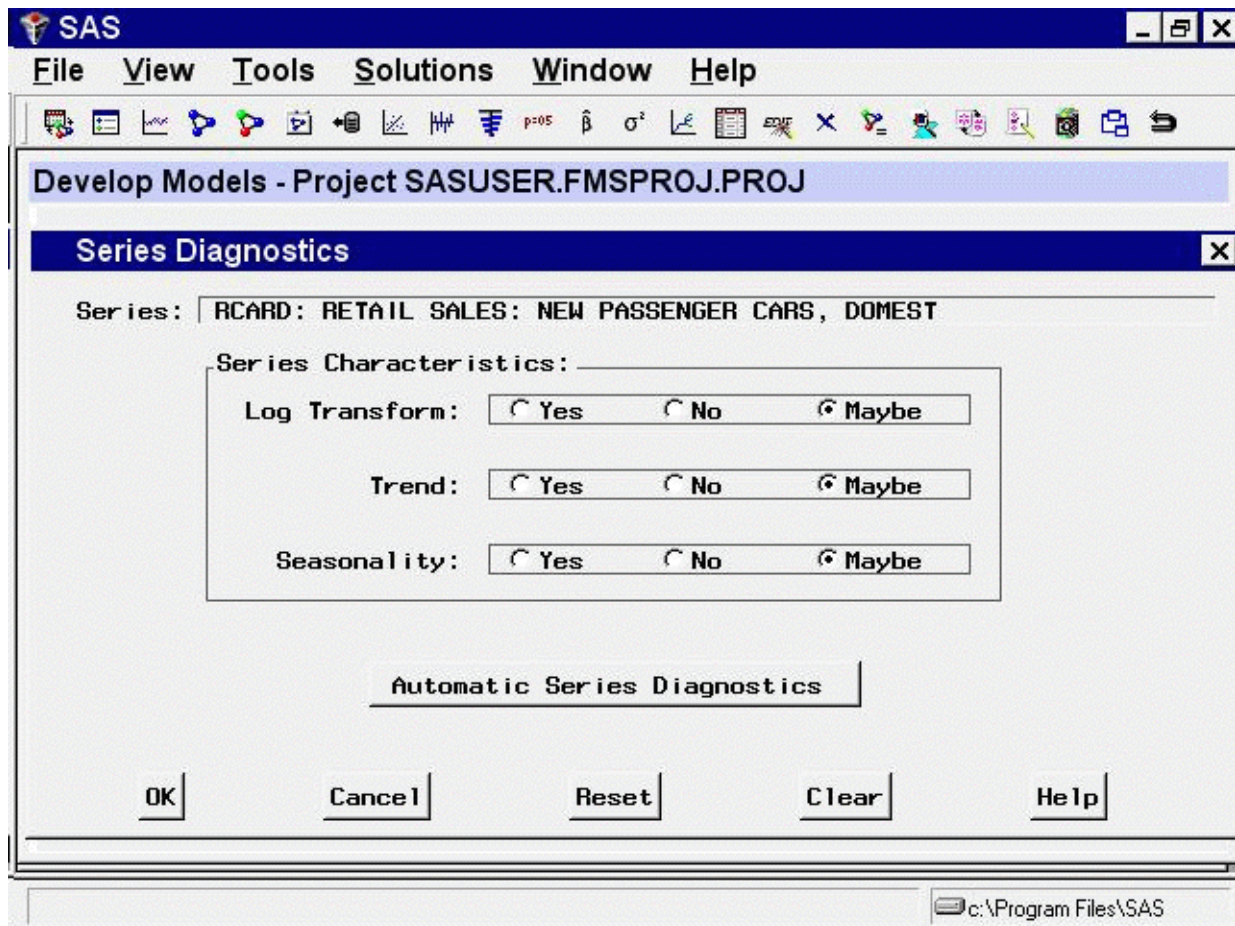
Figure 45.1 Automobile Sales Series

Select “Diagnose Series” from the Tools menu. You can do this from the Develop Models window or from the Time Series Viewer window. [Figure 45.2](#) shows this from the Develop Models window.

Figure 45.2 Selecting Series Diagnostics

This opens the Series Diagnostics window, as shown in [Figure 45.3](#).

Figure 45.3 Series Diagnostics Window



Each of the three series characteristics—need for log transformation, presence of a trend, and seasonality—has a set of options for *Yes*, *No*, and *Maybe*. *Yes* indicates that the series has the characteristic and that forecasting models fit to the series should be able to model and predict this behavior. *No* indicates that you do not need to consider forecasting models designed to predict series with this characteristic. *Maybe* indicates that models with and without the characteristic should be considered. Initially, all these values are set to *Maybe*.

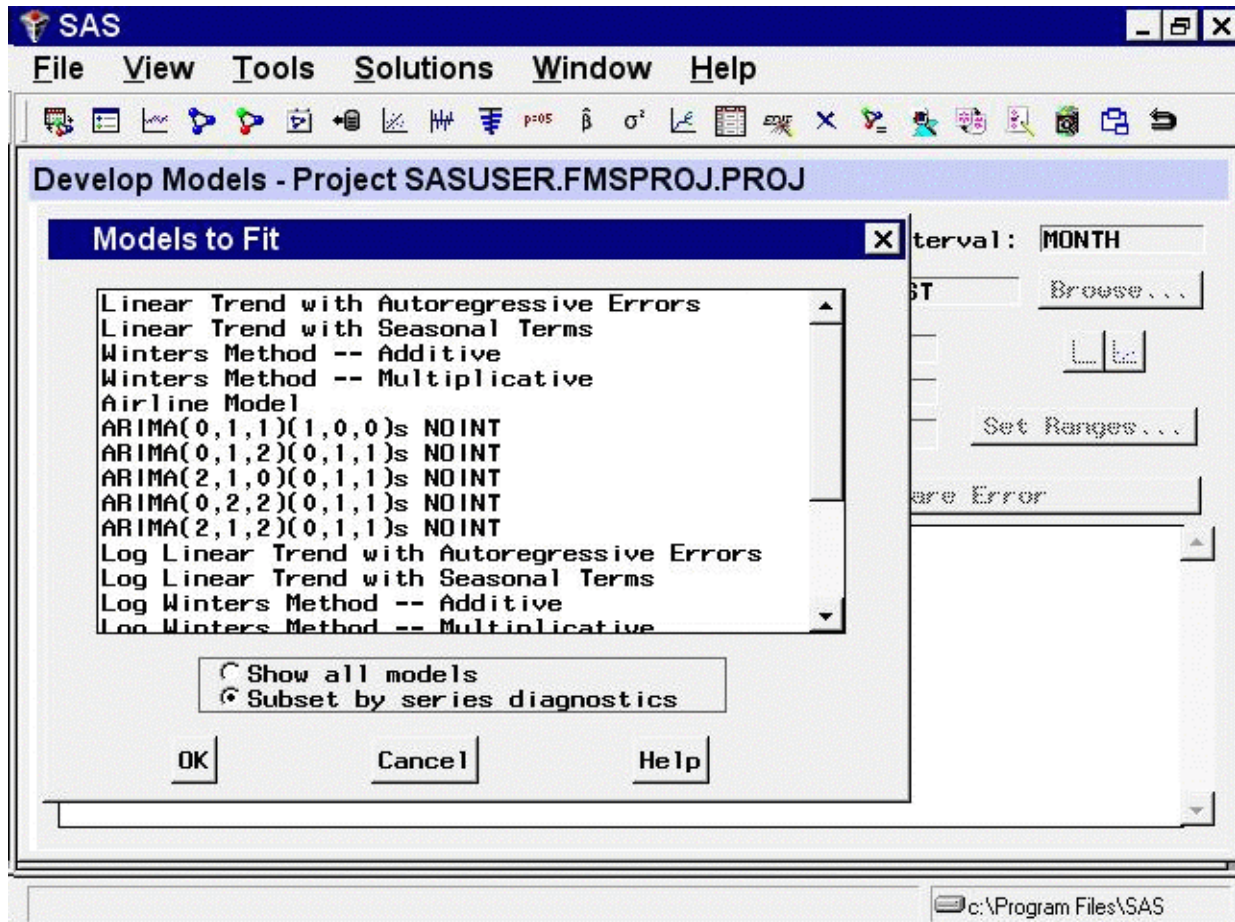
To have the system diagnose the series characteristics, select the **Automatic Series Diagnostics** button. This runs the diagnostic routines described in Chapter 50, “[Forecasting Process Details](#),” and sets the options according to the results. In this example, *Trend* and *Seasonality* are changed from *Maybe* to *Yes*, while *Log Transform* remains set to *Maybe*.

These diagnostic criteria affect the models displayed when you use the **Models to Fit** window or the **Automatic Model Selection** model-fitting options described in the following section. You can set the criteria manually, according to your judgment, by selecting any of the options, whether you have used the **Automatic Series Diagnostics** button or not. For this exercise, leave them as set by the automatic diagnostics. Select the **OK** button to close the **Series Diagnostics** window.

Models to Fit Window

As you saw in the previous chapter, you can select models from a list. Invoke the Models to Fit window by clicking the middle of the table and selecting “Fit Models from List” from the menu. This can also be selected from the tool bar or the Fit Model submenu of the Edit menu. The Models to Fit window comes up, as shown in Figure 45.4.

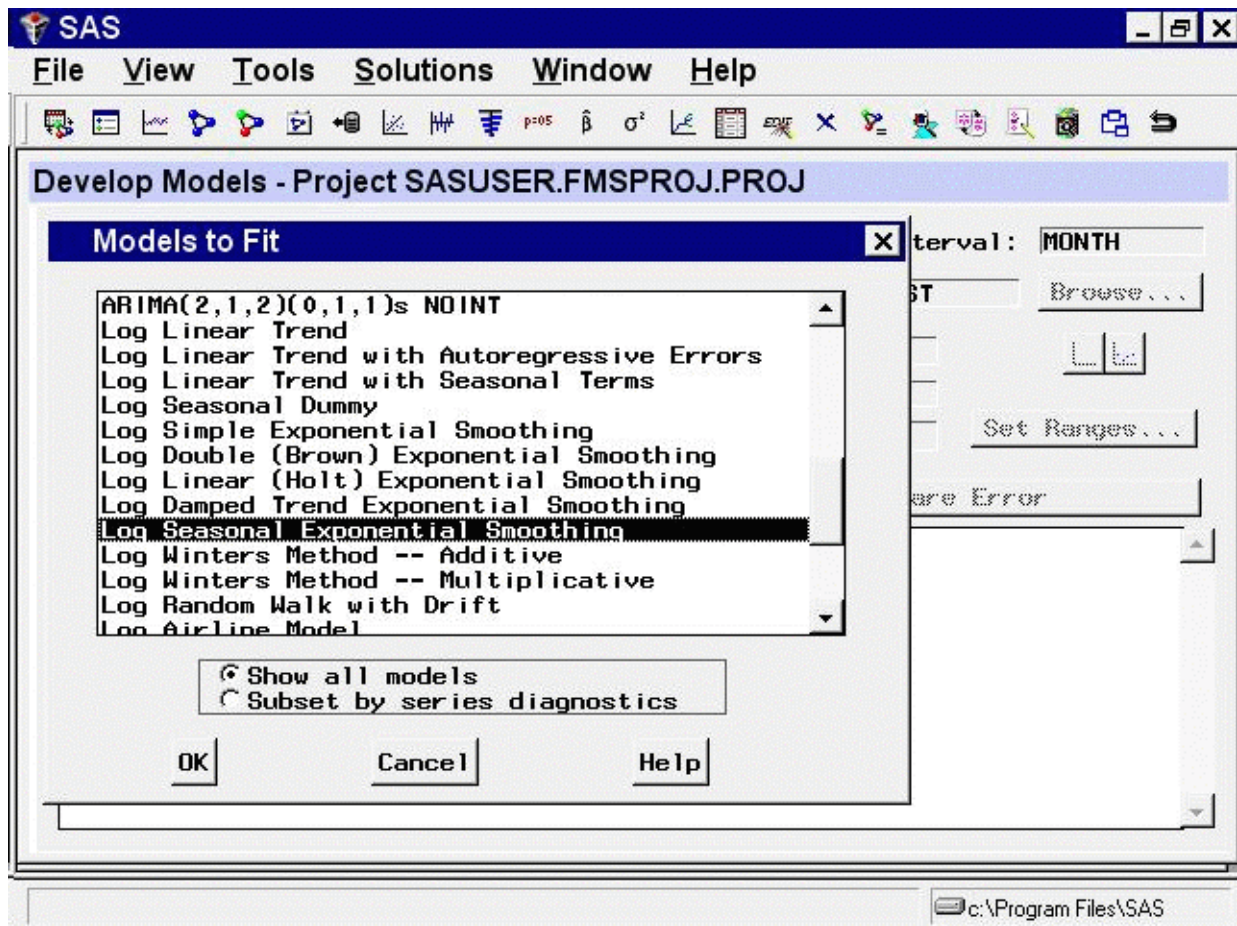
Figure 45.4 Models to Fit Window



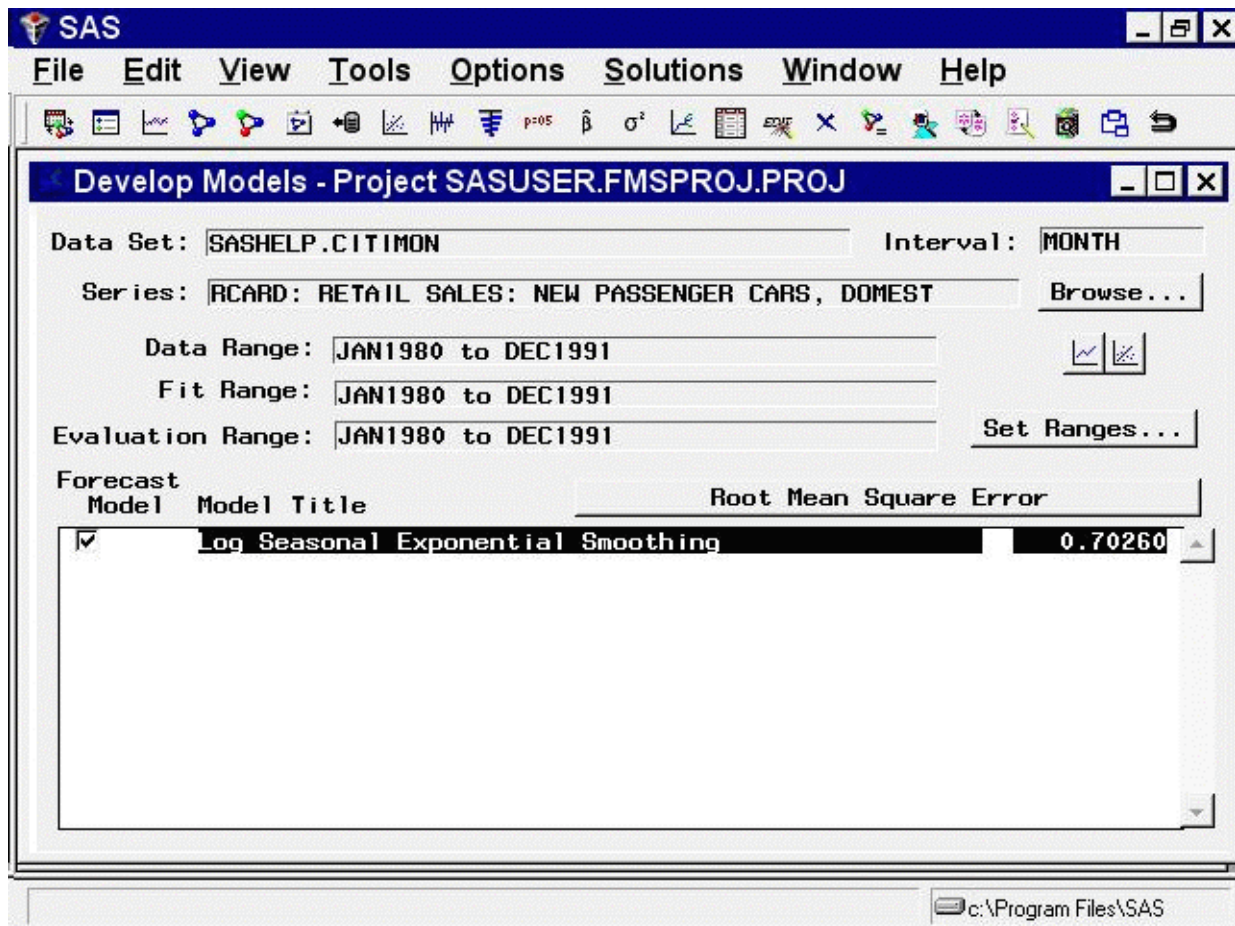
Since you have performed series diagnostics, the models shown are the subset that fits the diagnostic criteria.

Suppose you want to consider models other than those in this subset because you are undecided about including a trend in the model. Select the Show all models option. Now the entire model selection list is shown. Scroll through the list until you find Log Seasonal Exponential Smoothing, as shown in Figure 45.5.

Figure 45.5 Selecting a Model from List



This is a nontrended model, which seems a good candidate. Select this model, and then select the OK button. The model is fit to the series and then appears in the table with the value of the selected fit criterion, as shown in Figure 45.6.

Figure 45.6 Develop Models Window Showing Model Fit

You can edit the model list that appears in the Models to Fit window by selecting “Options” and “Model Selection List” from the menu bar or by selecting the Edit Model List toolbar icon. You can then delete models you are not interested in from the default list and add models using any of the model specification methods described in this chapter. When you save your project, the edited model selection list is saved in the project file. In this way, you can use the Select from List item and the Automatic Model Selection item to select models from a customized search set.

Automatic Model Selection

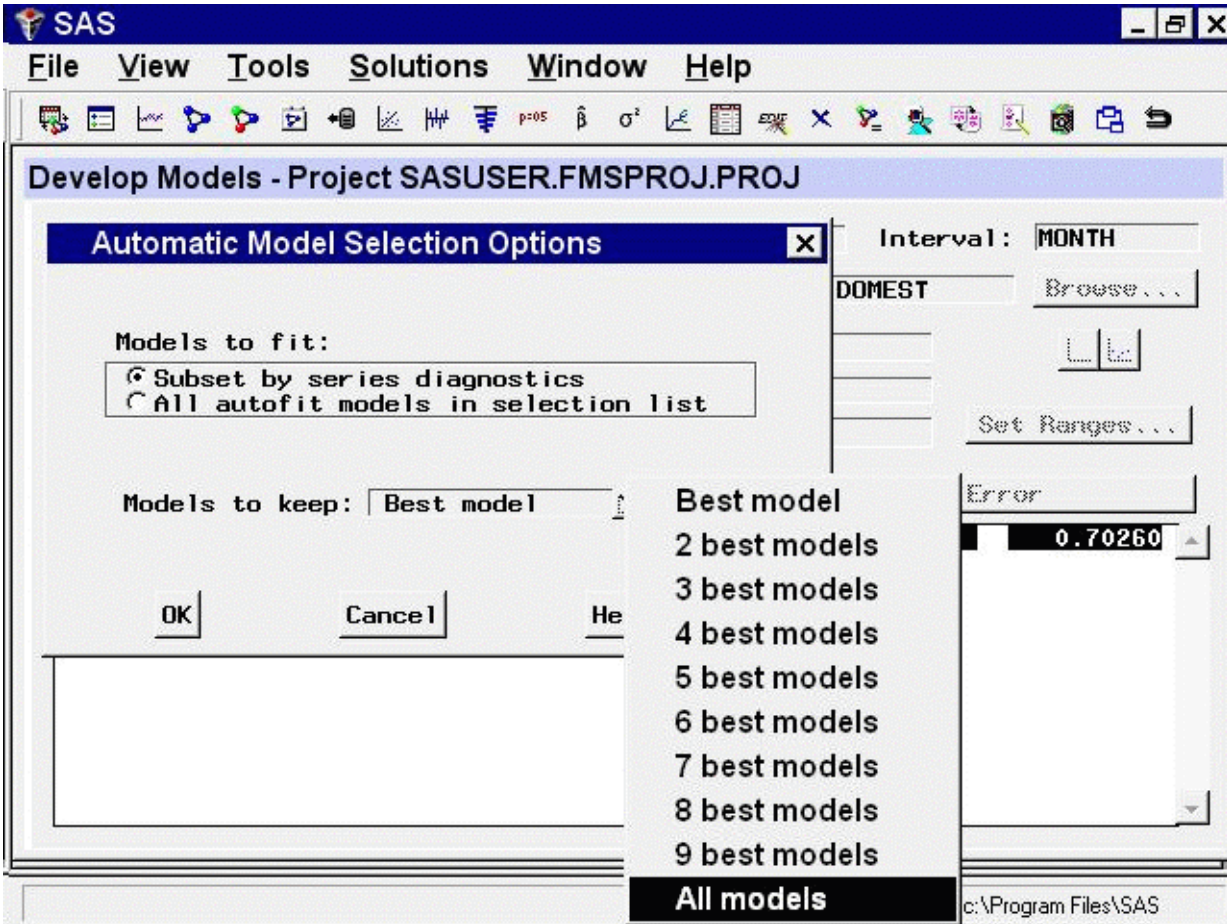
Automatic model selection is equivalent to choosing Select from List, as you did in the preceding section, fitting all the models in the subset list and then deleting all except the best fitting of the models. If series diagnostics have not yet been done, they are performed automatically to determine the model subset to fit. If you set the series diagnostics for log, trend, or seasonal criteria manually using the radio buttons, these choices are honored by the automatic fitting process.

Using automatic selection, the system does not pause to warn you of model fitting errors, such as failure of the estimates to converge (you can track these using the audit trail feature).

By default, only the best fitting model is kept. However, you can control the number of automatically fit models retained in the Develop Models list, and the following example shows how to do this.

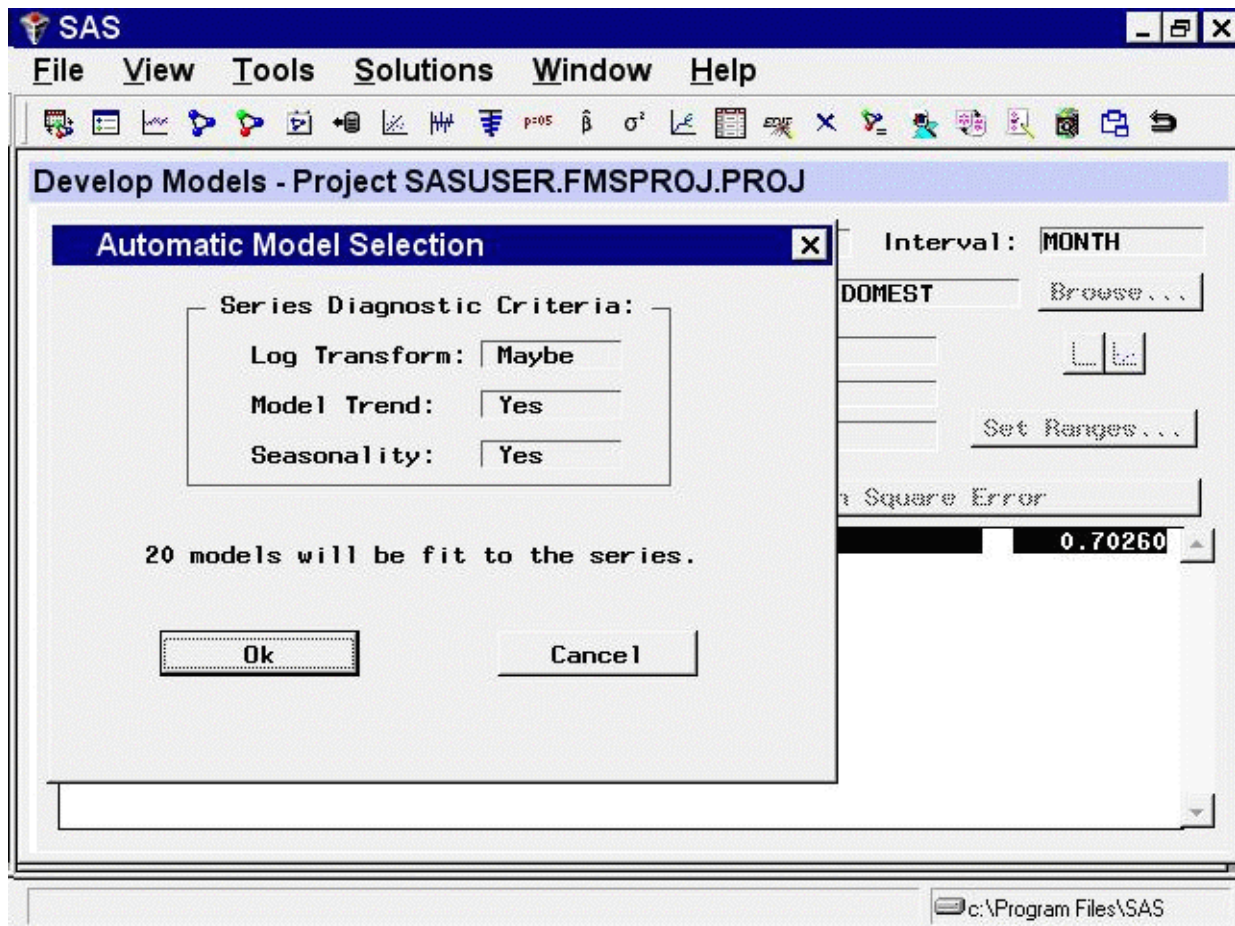
From the menu bar, choose “Options” and “Automatic Fit.” This opens the Automatic Model Selection Options window. Click the Models to Keep list arrow, and select “All models”, as shown in Figure 45.7. Now select OK.

Figure 45.7 Selecting Number of Automatic Fit Models to Keep



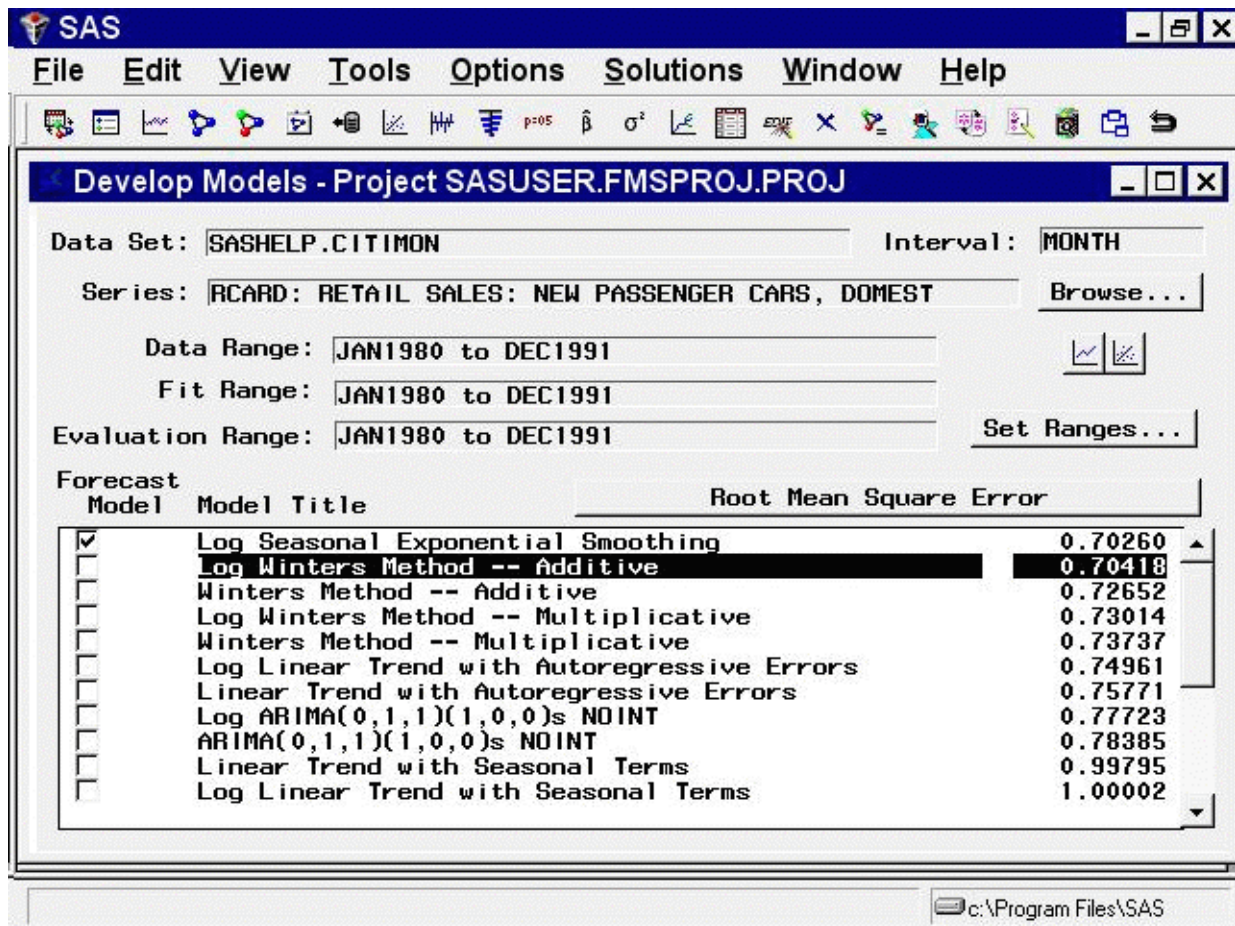
Next, select “Fit Models Automatically” by clicking the middle of the table or using the toolbar or Edit menu. The Automatic Model Selection window appears, showing the diagnostic criteria in effect and the number of models to be fit, as shown in Figure 45.8.

Figure 45.8 Automatic Model Selection Window



Select the OK button. After the models have been fit, all of them appear in the table, in addition to the model which you fit earlier, as shown in [Figure 45.9](#).

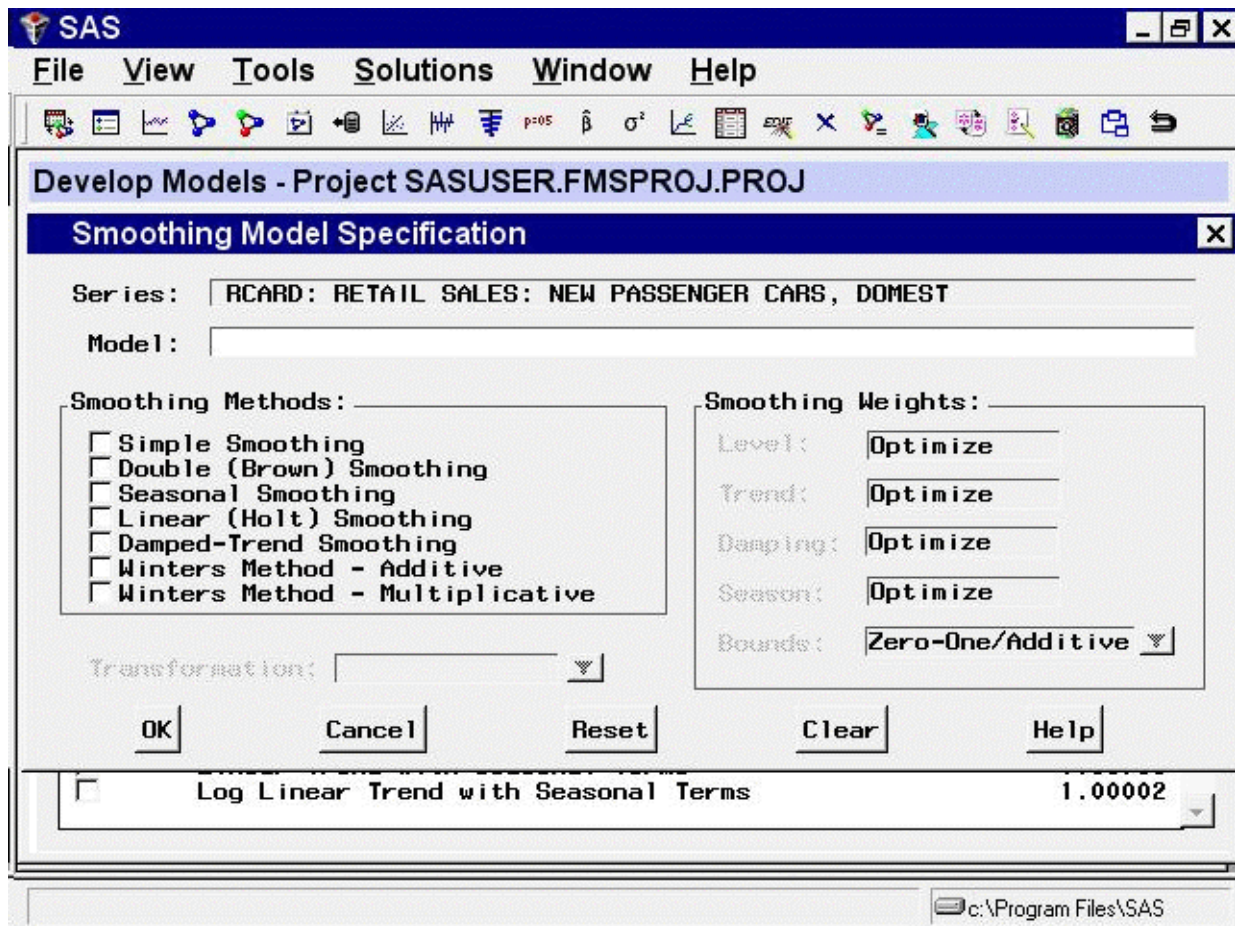
Figure 45.9 Automatically Fit Models



Smoothing Model Specification Window

To fit exponential smoothing and Winters models not already provided in the Models to Fit window, select “Fit Smoothing Model” from the pop-up menu or toolbar or select “Smoothing Model” from the Fit Model submenu of the Edit menu. This opens the Smoothing Model Specification window, as shown in Figure 45.10.

Figure 45.10 Smoothing Model Specification Window



The Smoothing Model Specification window consists of several parts. At the top is the series name and a field for the label of the model you are specifying. The model label is filled in with an automatically generated label as you specify options. You can type over the automatic label with your own label for the model. To restore the automatic label, enter a blank label.

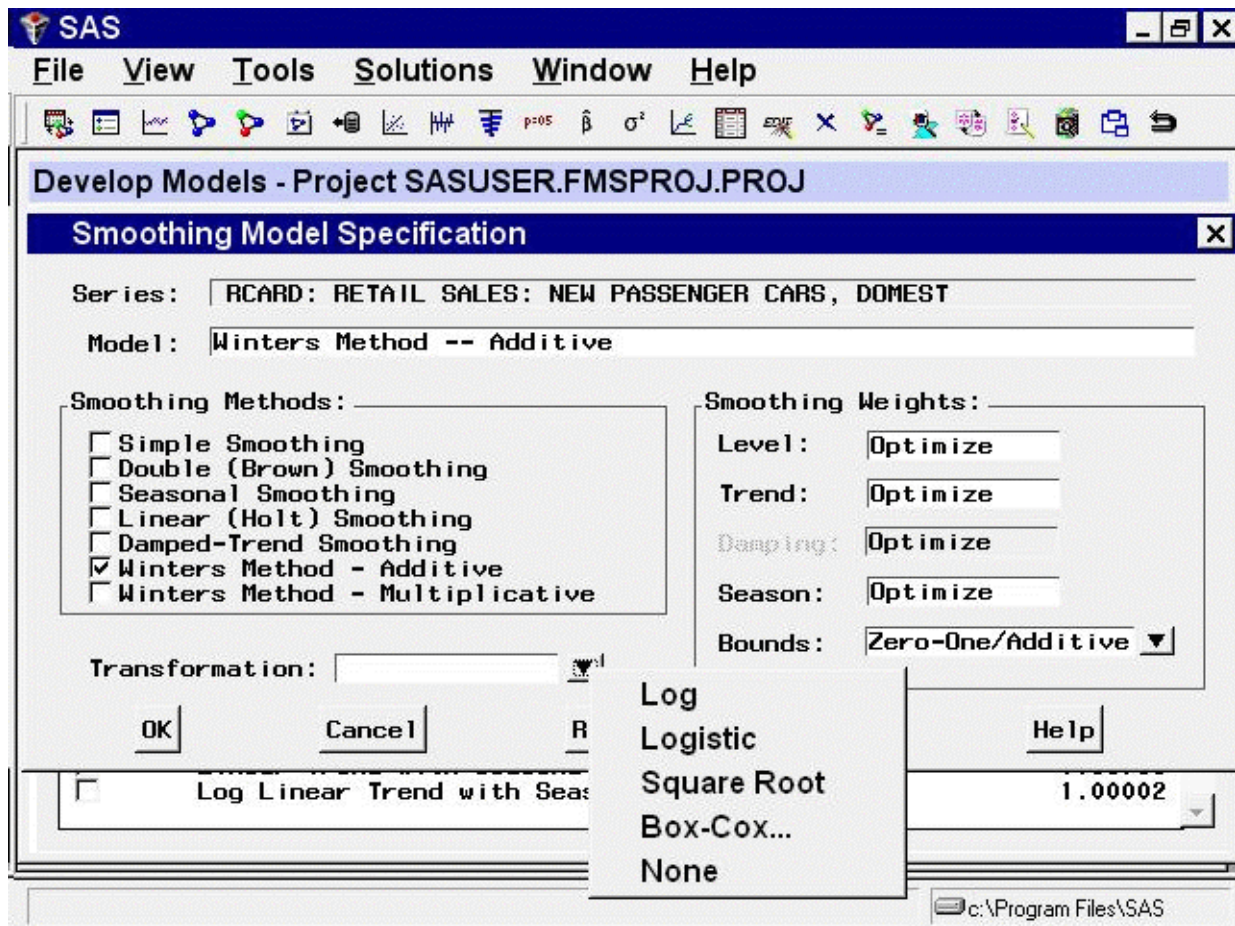
The Smoothing Methods box lists the different methods available. Below the Smoothing Methods box is the Transformation field, which is used to apply the smoothing method to transformed series values.

The Smoothing Weights box specifies how the smoothing weights are determined. By default, the smoothing weights are automatically set to optimize the fit of the model to the data. See Chapter 50, “Forecasting Process Details,” for more information about how the smoothing weights are fit.

Under smoothing methods, select “Winters Method – Additive.” Notice the smoothing weights box to the right. The third item, Damping, is grayed out, while the other items, Level, Trend, and Season, show the word *Optimize*. This tells you that these three smoothing weights are applicable to the smoothing method that you selected and that the system is currently set to optimize these weights for you.

Next, specify a transformation using the Transformation list. A menu of transformation choices pops up, as shown in Figure 45.11.

Figure 45.11 Transformation Options

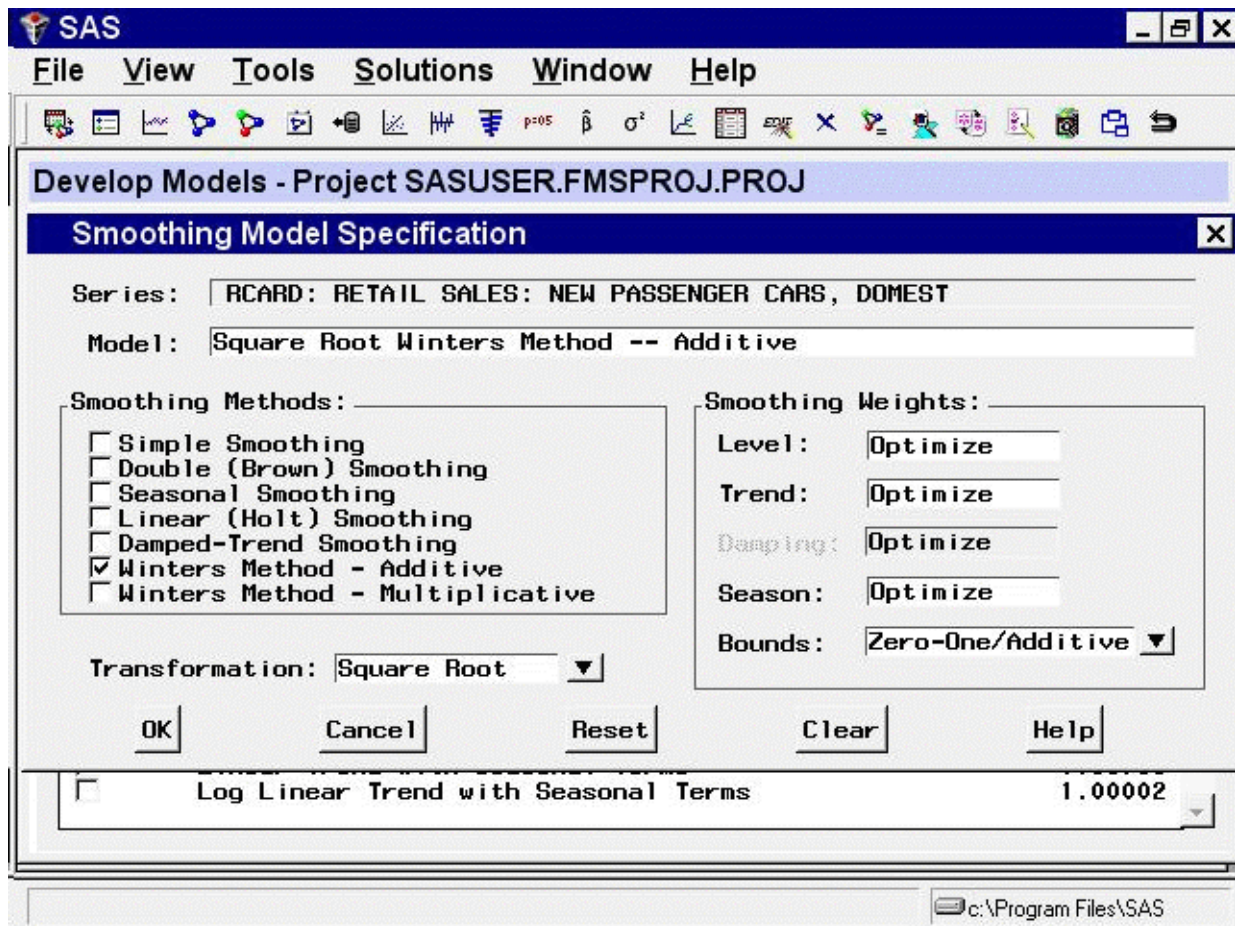


You can specify a logarithmic, logistic, square root, or Box-Cox transformation. For this example, select “Square Root” from the list. The Transformation field is now set to Square Root.

This means that the system will first take the square roots of the series values, apply the additive version of the Winters method to the square root series, and then produce the predictions for the original series by squaring the Winters method predictions (and multiplying by a variance factor if the Mean Prediction option is set in the Forecast Options window). See Chapter 50, “[Forecasting Process Details](#),” for more information about predictions from transformed models.

The Smoothing Model Specification window should now appear as shown in [Figure 45.12](#). Select the OK button to fit the model. The model is added to the table of fitted models in the Develop Models window.

Figure 45.12 Winter's Method Applied to Square Root Series



ARIMA Model Specification Window

To fit ARIMA or Box-Jenkins models not already provided in the Models to Fit window, select the ARIMA model item from the pop-up menu, toolbar, or Edit menu. This opens the ARIMA Model Specification window, as shown in Figure 45.13.

Figure 45.13 ARIMA Model Specification Window

ARIMA Model Specification

Series: RCARD: RETAIL SALES: NEW PASSENGER CARS, DOMEST

Model:

ARIMA Options:

Autoregressive: p= 0 ▼

Differencing: d= 0 ▼

Moving Average: q= 0 ▼

Seasonal ARIMA Options:

Autoregressive: P= 0 ▼

Differencing: D= 0 ▼

Moving Average: Q= 0 ▼

Transformation: None ▼

Intercept: ☒ Yes ☐ No

Predictors

OK Cancel Reset Clear Add... Delete Edit... Help

c:\Program Files\SAS

This ARIMA Model Specification window is structured according to the Box and Jenkins approach to time series modeling. You can specify the same time series models with the Custom Model Specification window and the ARIMA Model Specification window, but the windows are structured differently, and you may find one more convenient than the other.

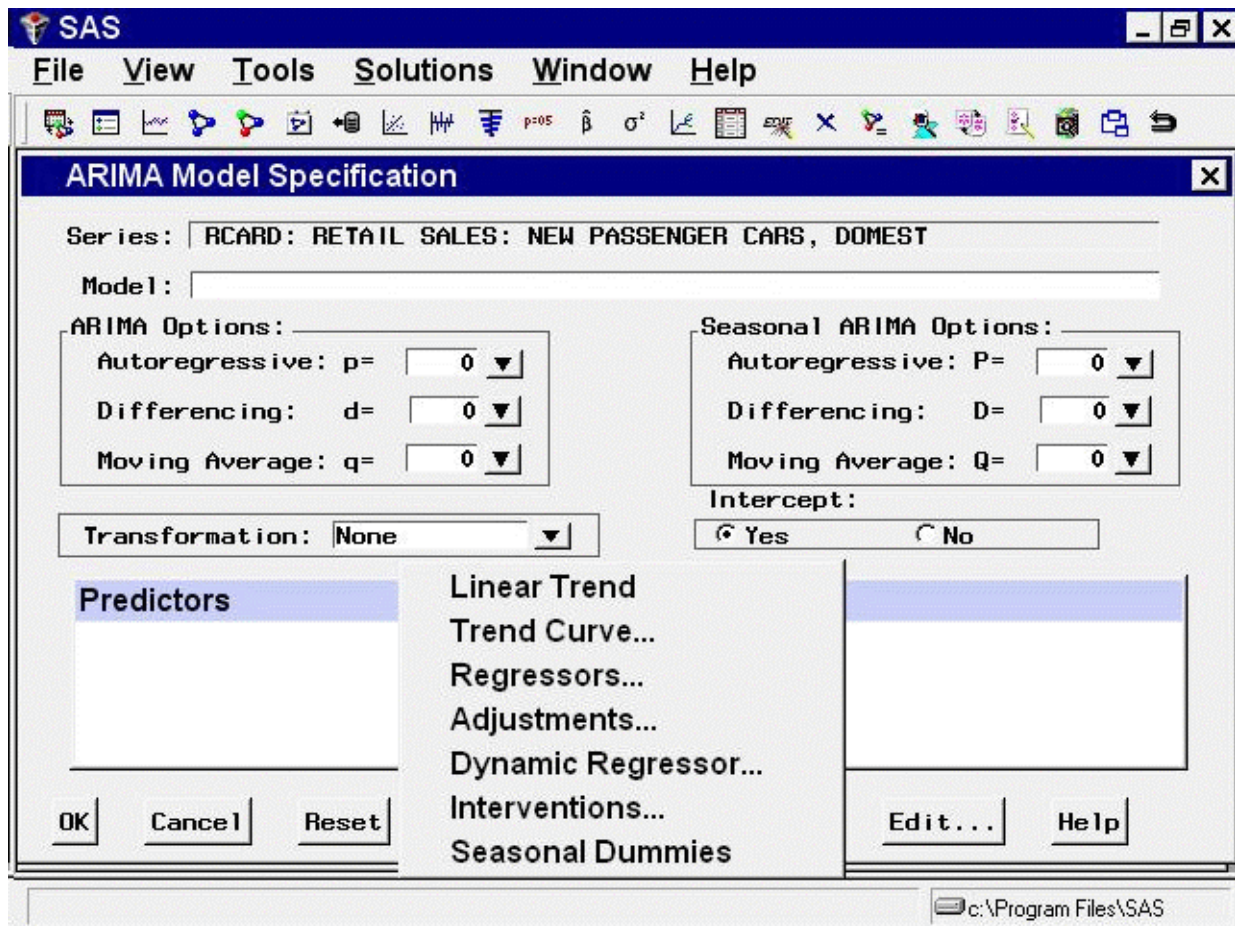
At the top of the ARIMA Model Specification window is the name and label of the series and the label of the model you are specifying. The model label is filled in with an automatically generated label as you specify options. You can type over the automatic label with your own label for the model. To restore the automatic label, enter a blank label.

Using the ARIMA Model Specification window, you can specify autoregressive (p), differencing (d), and moving average (q) orders for both simple and seasonal factors. You can specify transformations with the Transformation list. You can also specify whether an intercept is included in the ARIMA model.

In addition to specifying seasonal and nonseasonal ARIMA processes, you can also specify predictor variables and other terms as inputs to the model. ARIMA models with inputs are sometimes called ARIMAX models or Box-Tiao models. Another term for this kind of model is *dynamic regression*.

In the lower part of the ARIMA Model Specification window is the list of *predictors* to the model (initially empty). You can specify predictors by using the Add button. This opens a menu of different kinds of independent effects, as shown in Figure 45.14.

Figure 45.14 Add Predictors Menu



The kinds of predictor effects allowed include time trends, regressors, adjustments, dynamic regression (transfer functions), intervention effects, and seasonal dummy variables. How to use different kinds of predictors is explained in Chapter 47, “[Using Predictor Variables](#).”

As an example, in the *ARIMA Options* box, set the order of differencing d to 1 and the moving average order q to 2. You can either type in these values or click the arrows and select the values from pop-up lists.

These selections specify an $ARIMA(0,1,2)$ or $IMA(1,2)$ model. (See Chapter 7, “[The ARIMA Procedure](#),” for more information about the notation used for ARIMA models.) Notice that the model label at the top is now $IMA(1,2) NOINT$, meaning that the data are differenced once and a second-order moving-average term is included with no intercept.

In the *Seasonal ARIMA Options* box, set the seasonal moving-average order Q to 1. This adds a first-order moving-average term at the seasonal (12 month) lag. Finally, select “Log” in the Transformation combo box.

The model label is now $Log\ ARIMA(0,1,2)(0,0,1)_S NOINT$, and the window appears as shown in [Figure 45.15](#).

Figure 45.15 Log ARIMA(0,1,2)(0,0,1)s Specified

SAS

File View Tools Solutions Window Help

ARIMA Model Specification

Series: RCARD: RETAIL SALES: NEW PASSENGER CARS, DOMEST

Model: Log ARIMA(0,1,2)(0,0,1)s NOINT

ARIMA Options:

Autoregressive: p= 0 ▼

Differencing: d= 1 ▼

Moving Average: q= 2 ▼

Seasonal ARIMA Options:

Autoregressive: P= 0 ▼

Differencing: D= 0 ▼

Moving Average: Q= 1 ▼

Transformation: Log ▼

Intercept: ☐ Yes ☒ No

Predictors

OK Cancel Reset Clear Add... Delete Edit... Help

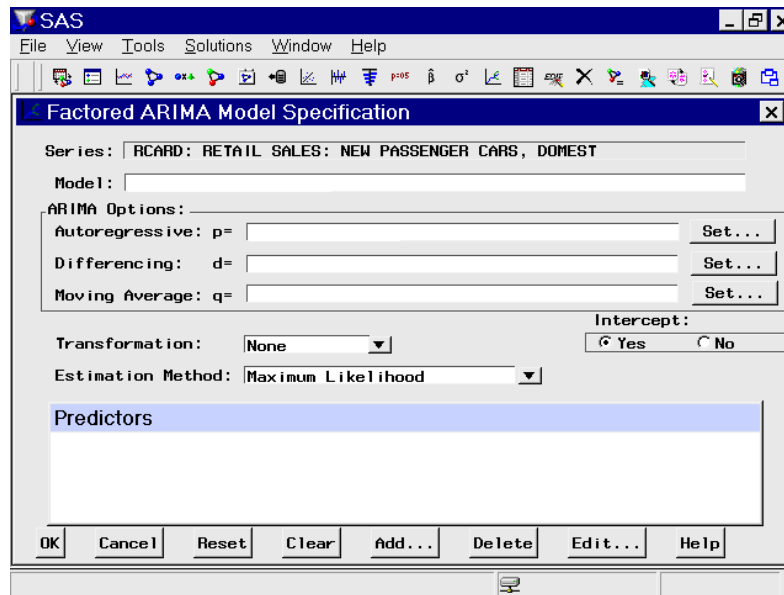
c:\Program Files\SAS

Select the OK button to fit the model. The model is fit and added to the Develop Models table.

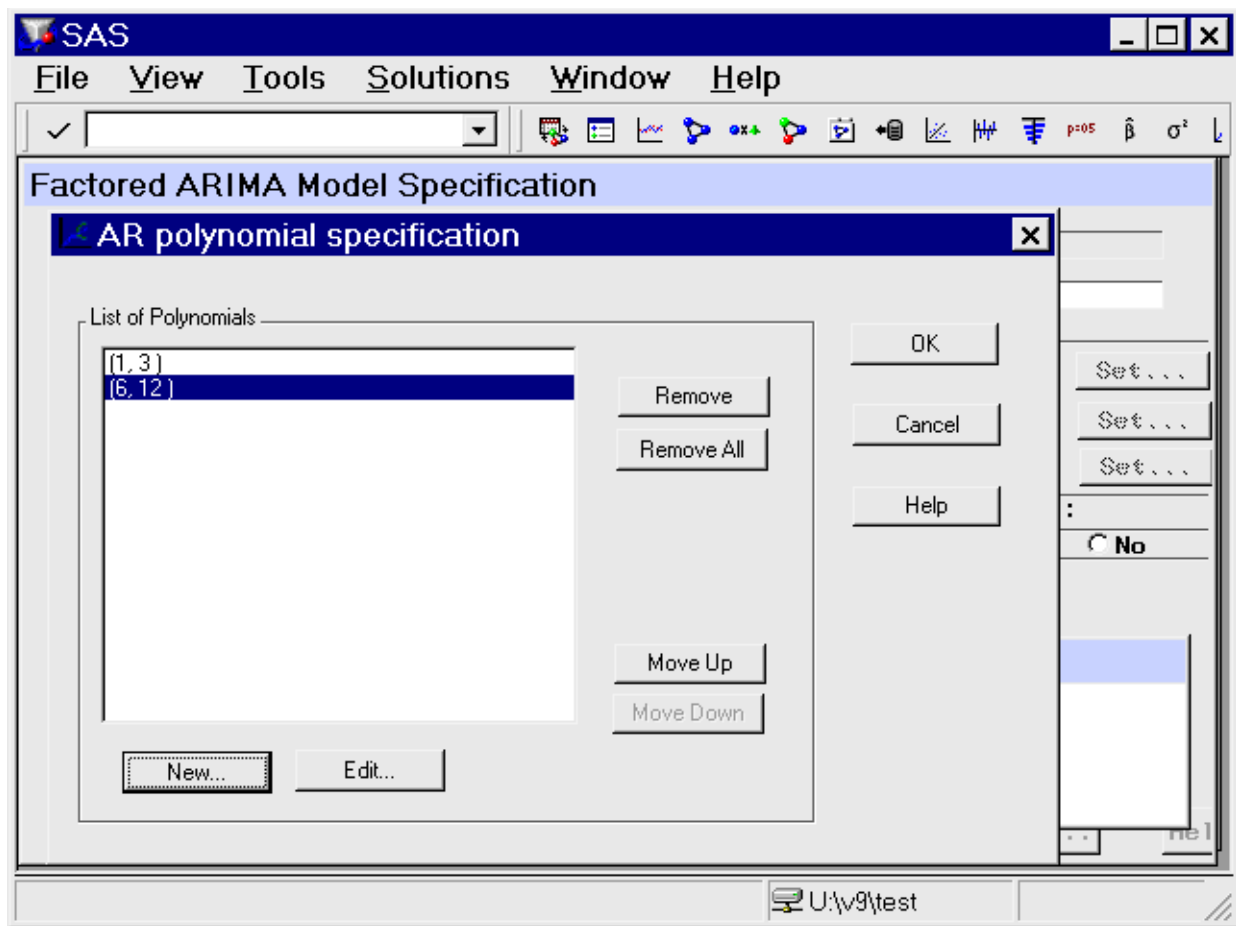
Factored ARIMA Model Specification Window

To fit a factored ARIMA model, select the Factored ARIMA model item from the pop-up menu, toolbar, or Edit menu. This brings up the Factored ARIMA Model Specification window, shown in [Figure 45.16](#).

Figure 45.16 Factored ARIMA Model Specification Window



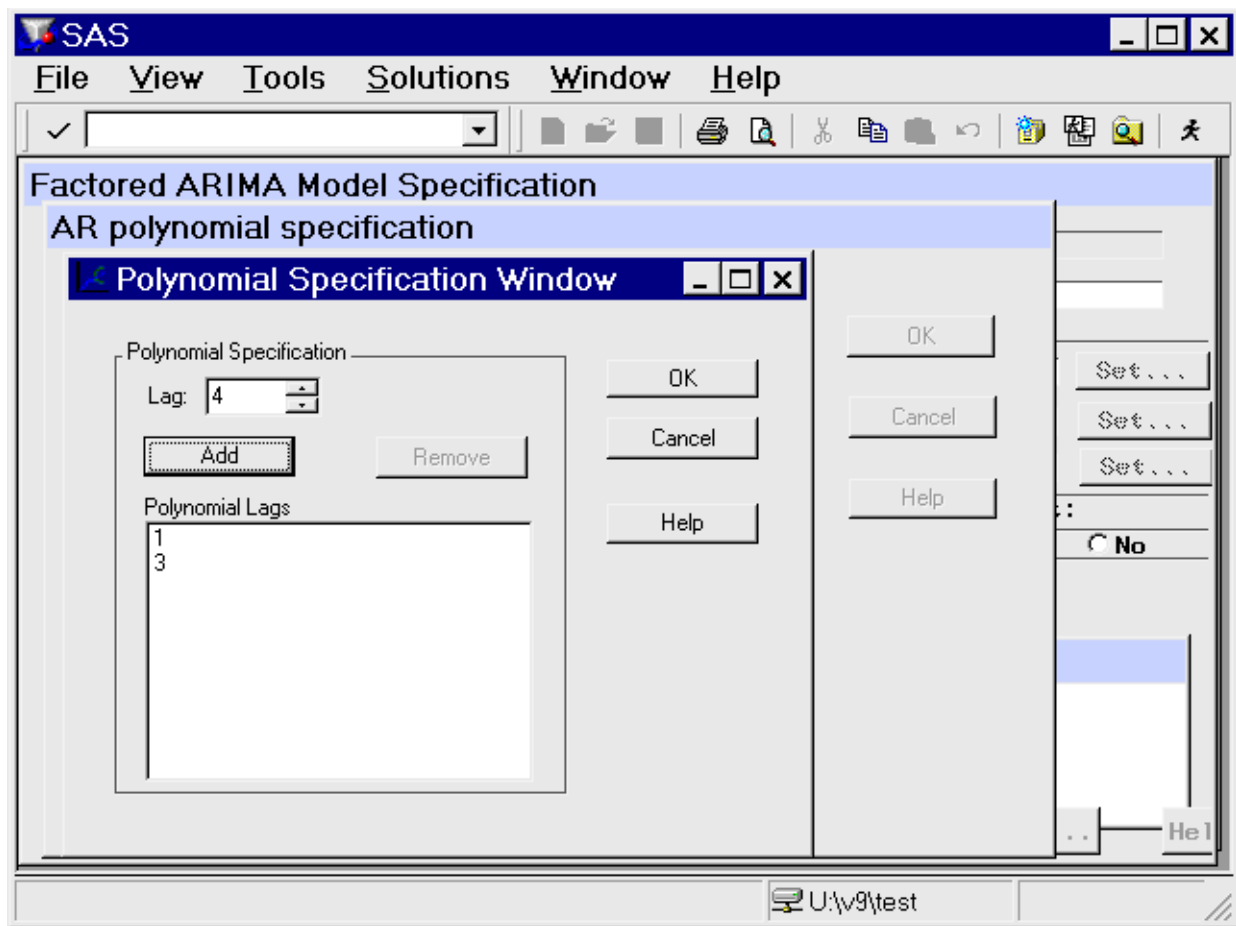
The Factored ARIMA Model Specification window is similar to the ARIMA Model Specification window and has the same features, but it uses a more general specification of the autoregressive (p), differencing (d), and moving-average (q) terms. To specify these terms, select the corresponding Set button, as shown in [Figure 45.16](#). For example, to specify autoregressive terms, select the first Set button. This opens the AR Polynomial Specification Window, shown in [Figure 45.17](#).

Figure 45.17 AR Polynomial Specification Window

To add AR polynomial terms, select the New button. This opens the Polynomial Specification Window, shown in Figure 45.18. Specify the first lag you want to include by using the Lag spin box, then select the Add button. Repeat this process, adding each lag you want to include in the current list. All lags must be specified. For example, if you add only lag 3, the model contains only lag 3, not 1 through 3.

As an example, add lags 1 and 3, then select the OK button. The AR Polynomial Specification Window now shows (1,3) in the list of polynomials. Now select “New” again. Add lags 6 and 12 and select “OK”. Now the AR Polynomial Specification Window shows (1,3) and (6,12) as shown in Figure 45.17. Select “OK” to close this window. The Factored ARIMA Model Specification Window now shows the factored model $p=(1, 3) (6, 12)$. Use the same technique to specify the q terms, or moving-average part of the model. There is no limit to the number of lags or the number of factors you can include in the model.

Figure 45.18 Polynomial Specification Window



To specify differencing lags, select the middle Set button to open the Differencing Specification window. Specify lags using the spin box and add them to the list with the Add button. When you select “OK” to close the window, the differencing lags appear after $d=$ in the Factored ARIMA Specification Window, within a single pair of parentheses.

You can use the Factored ARIMA Model Specification Window to specify any model that you can specify with the ARIMA Model and Custom Model windows, but the notation is more similar to that of the ARIMA procedure (see Chapter 7, “[The ARIMA Procedure](#)”). Consider as an example the classic Airline model fit to the International Airline Travel series, `SASHELP.AIR`. This is a factored model with one moving-average term at lag one and one moving-average term at the seasonal lag, with first-order differencing at the simple and seasonal lags. Using the ARIMA Model Specification Window, you specify the value 1 for the q and d terms and also for the Q and D terms, which represent the seasonal lags. For monthly data, the seasonal lags represent lag 12, since a yearly seasonal cycle is assumed.

By contrast, the Factored ARIMA Model Specification Window makes no assumptions about seasonal cycles. The Airline model is written as $IMA\ d=(1,12)\ q=(1)(12)\ NOINT$. To specify the differencing terms, add the values 1 and 12 in the Differencing Specification Window and select OK. Then select “New” in the MA Polynomial Specification Window, add the value 1, and select OK. To add the factored term, select “New” again, add the value 12, and select OK. Remember to select “No” in the Intercept radio box, since it is not selected by default. Select OK to close the Factored ARIMA Model Specification Window and fit the model.

You can show that the results are the same as they are when you specify the model by using the ARIMA Model Specification Window and when you select Airline Model from the default model list. If you are familiar with the ARIMA Procedure (Chapter 7, “[The ARIMA Procedure](#)”), you might want to turn on the `Show Source Statements` option before fitting the model, then examine the procedure source statements in the log window after fitting the model.

The strength of the Factored ARIMA Specification approach lies in its ability to construct unusual ARIMA models, such as:

Subset models

These are models of order n , where fewer than n lags are specified. For example, an AR order 3 model might include lags 1 and 3 but not lag 2.

Unusual seasonal cycles

For example, a monthly series might cycle two or four times per year instead of just once.

Multiple cycles

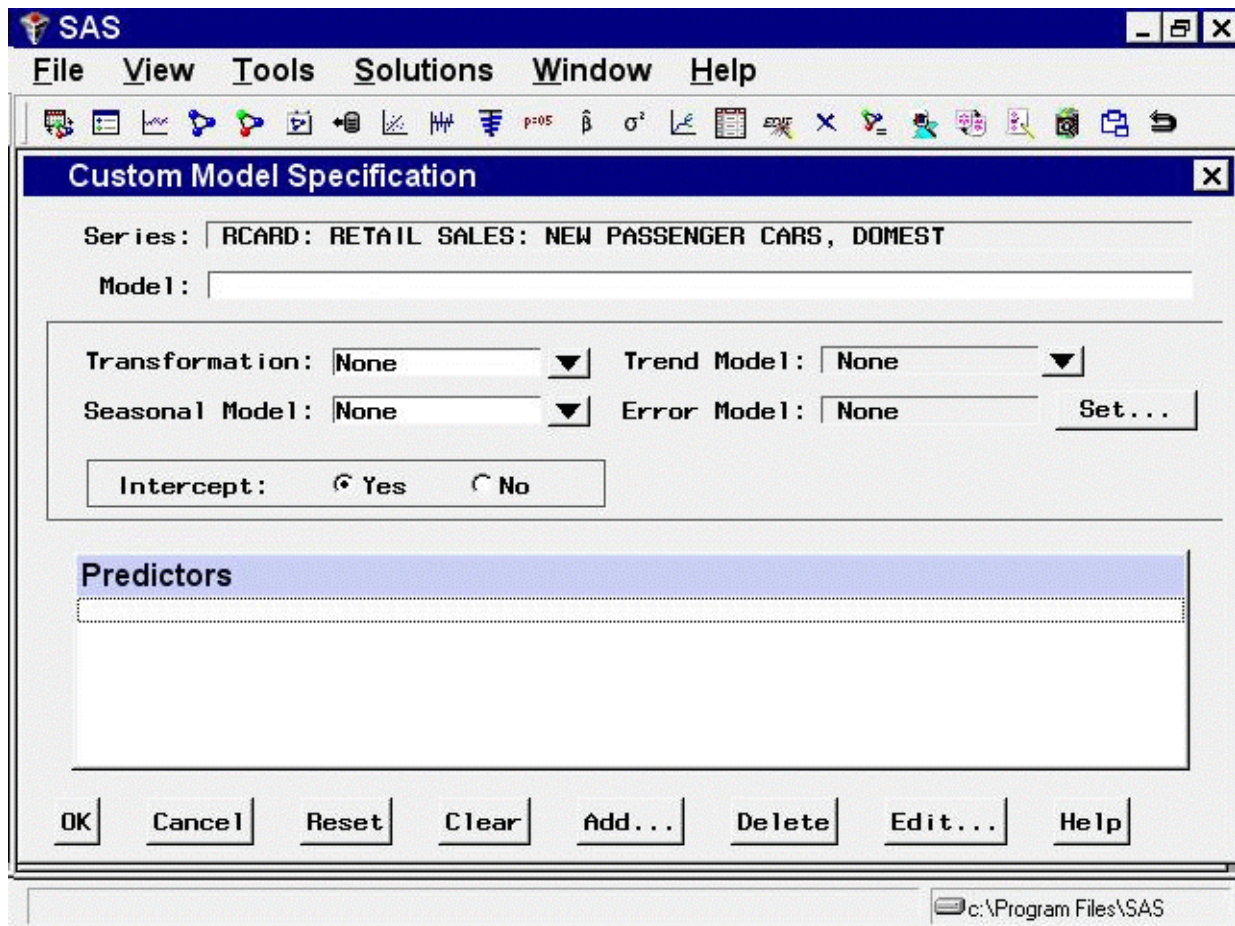
For example, a daily sales series might peak on a certain day each week and also once a year at the Christmas season. Given sufficient data, you can fit a three-factor model, such as $IMA\ d=(1)\ q=(1)(7)(365)$.

Models with high order lags take longer to fit and often fail to converge. To save time, select the Conditional Least Squares or Unconditional Least Squares estimation method (see [Figure 45.16](#)). Once you have narrowed down the list of candidate models, change to the Maximum Likelihood estimation method.

Custom Model Specification Window

To fit a custom time series model not already provided in the Models to Fit window, select the Custom Model item from the pop-up menu, toolbar, or Edit menu. This opens the Custom Model Specification window, as shown in [Figure 45.19](#).

Figure 45.19 Custom Model Specification Window



You can specify the same time series models with the Custom Model Specification window and the ARIMA Model Specification window, but the windows are structured differently, and you might find one more convenient than the other.

At the top of the Custom Model Specification window is the name and label of the series and the label of the model you are specifying. The model label is filled in with an automatically generated label as you specify options. You can type over the automatic label with your own label for the model. To restore the automatic label, enter a blank label.

The middle part of the Custom Model Specification window consists of four fields: *Transformation*, *Trend Model*, *Seasonal Model*, and *Error Model*. These fields allow you to specify the model in four parts. Each part specifies how a different aspect of the pattern of the time series is modeled and predicted.

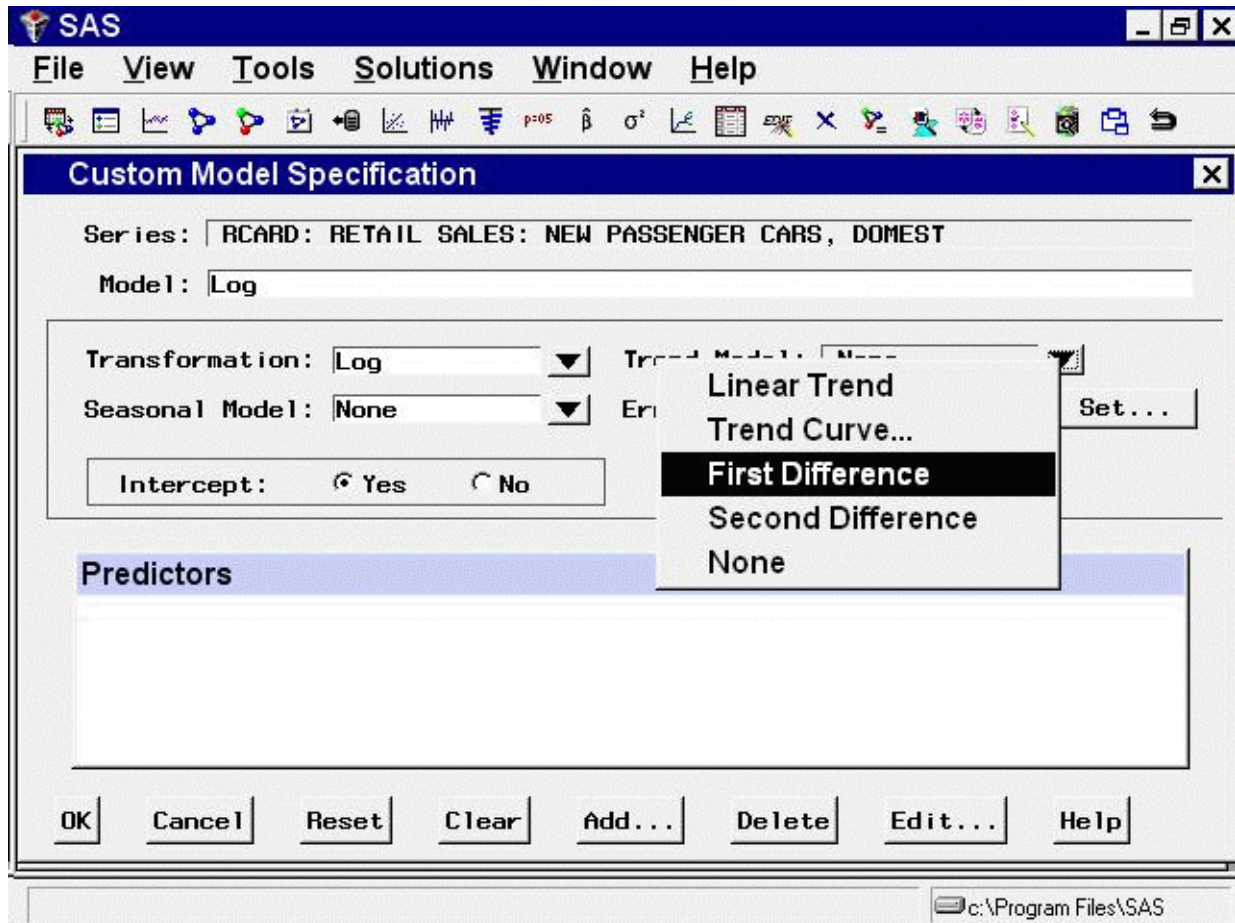
The *Predictors* list at the bottom of the Custom Model Specification window allows you to include different kinds of predictor variables in the forecasting model. The *Predictors* feature for the Custom Model Specification window is like the *Predictors* feature for the ARIMA Model Specification window, except that time trend predictors are provided through the *Trend Model* field and seasonal dummy variable predictors are provided through the *Seasonal Model* field.

To illustrate how to use the Custom Model Specification window, the following example specifies the same model you fit by using the ARIMA Model Specification window.

First, specify the data transformation to use. Select “Log” using the Transformation combo box.

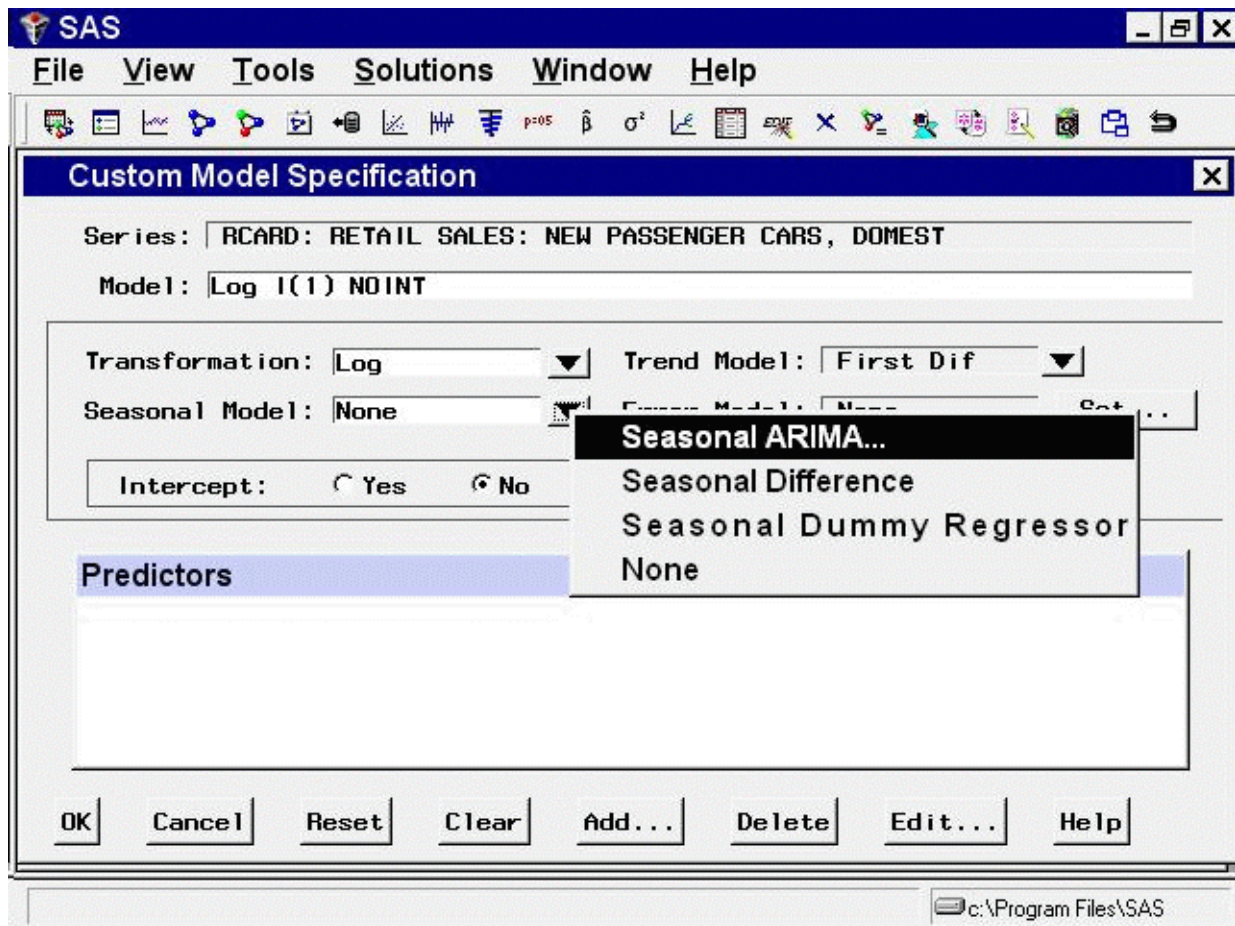
Second, specify how to model the trend in the series. Select `First Difference` in the Trend Model combo box, as shown in [Figure 45.20](#).

Figure 45.20 Trend Model Options

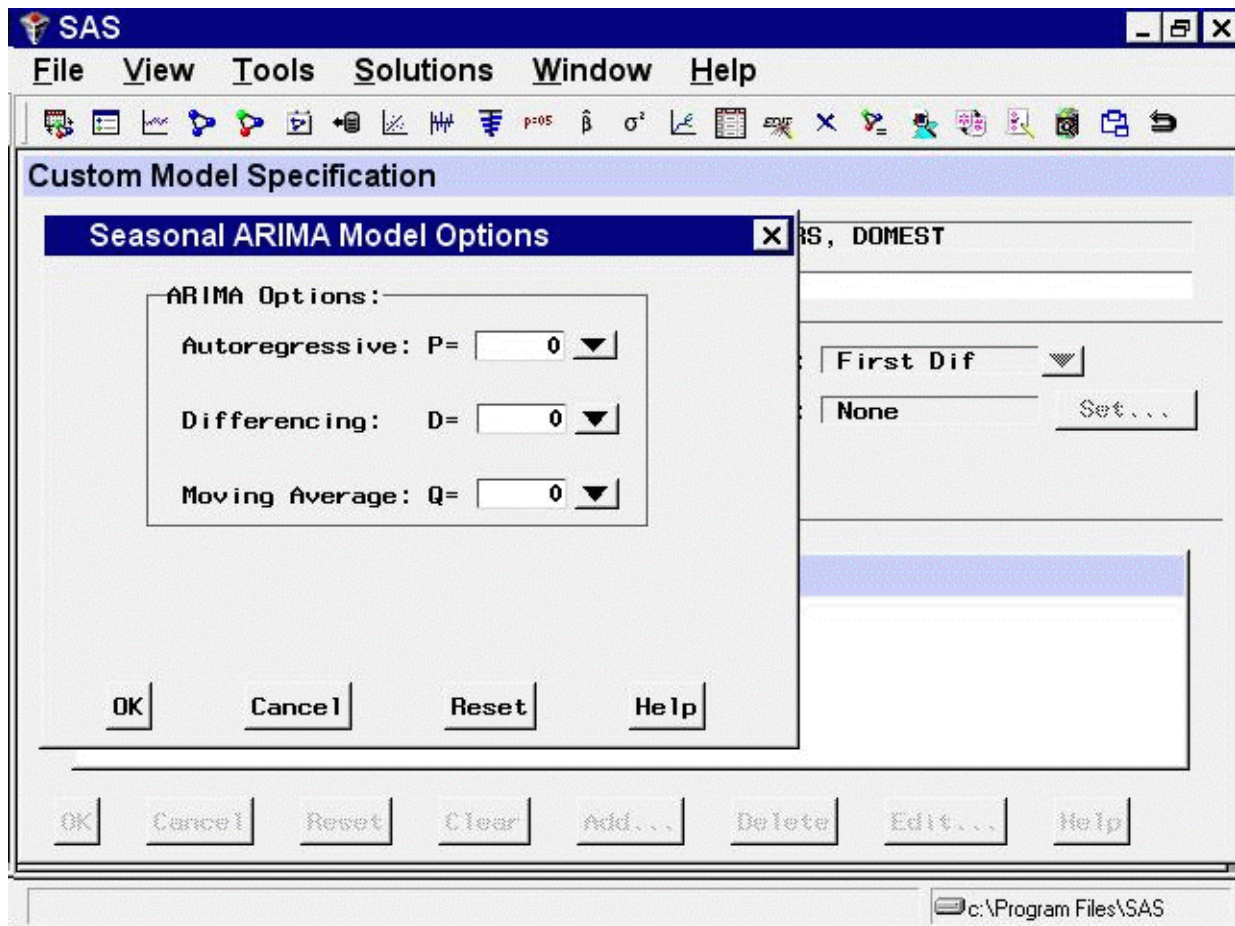


Next, specify how to model the seasonal pattern in the series. Select “Seasonal ARIMA” in the Seasonal Model combo box, as shown in [Figure 45.21](#).

Figure 45.21 Seasonal Model Options



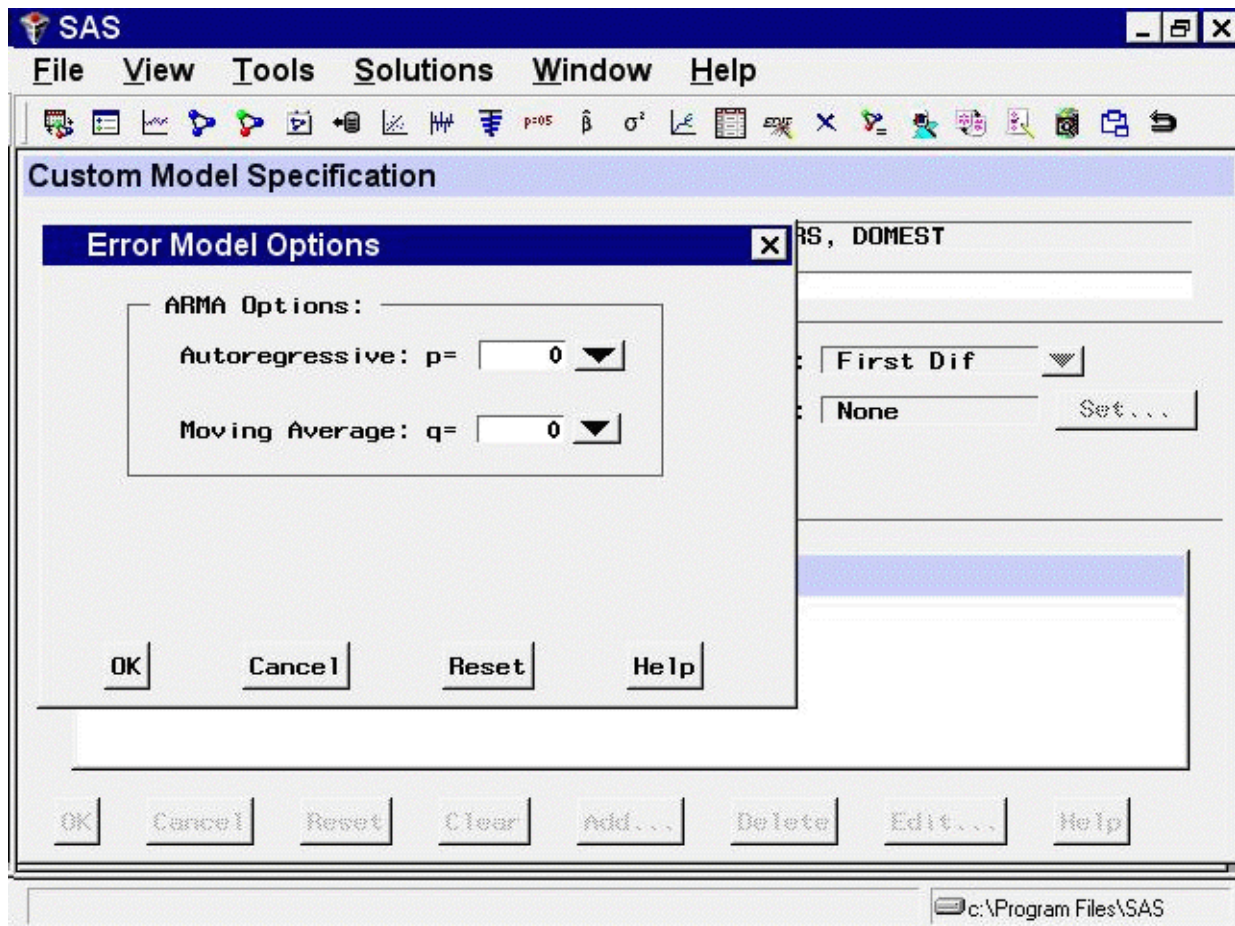
This opens the Seasonal ARIMA Model Options window, as shown in [Figure 45.22](#).

Figure 45.22 Seasonal ARIMA Model Options

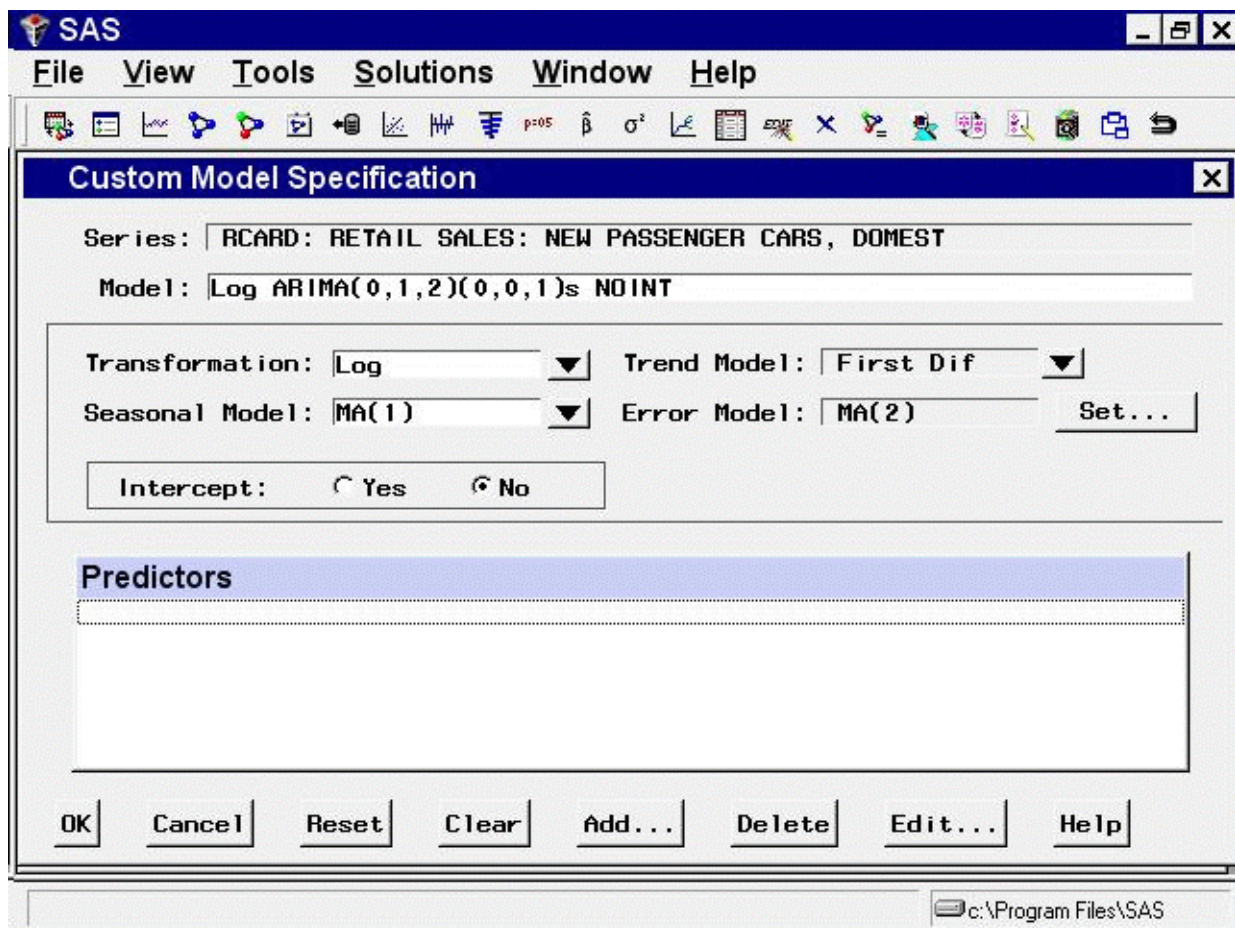
Specify a first-order seasonal moving-average term by typing 1 or by selecting “1” from the Moving Average: Q= combo box pop-up menu, and then select the OK button.

Finally, specify how to model the autocorrelation pattern in the model prediction errors. Select the Set button to the right of the Error Model field. This opens the Error Model Options window, as shown in Figure 45.23. This window allows you to specify an ARMA error process. Set the Moving Average order q to 2, and then select the OK button.

Figure 45.23 Error Model Options



The Custom Model Specification window should now appear as shown in [Figure 45.24](#). The model label at the top of the Custom Model Specification window should now read `Log ARIMA (0,1,2) (0,0,1) s NOINT,` just as it did when you used the ARIMA Model Specification window.

Figure 45.24 Log ARIMA(0,1,2)(0,0,1)s Specified

Now that you have seen how the Custom Model Specification window works, select “Cancel” to exit the window without fitting the model. This should return you to the Develop Models window.

Editing the Model Selection List

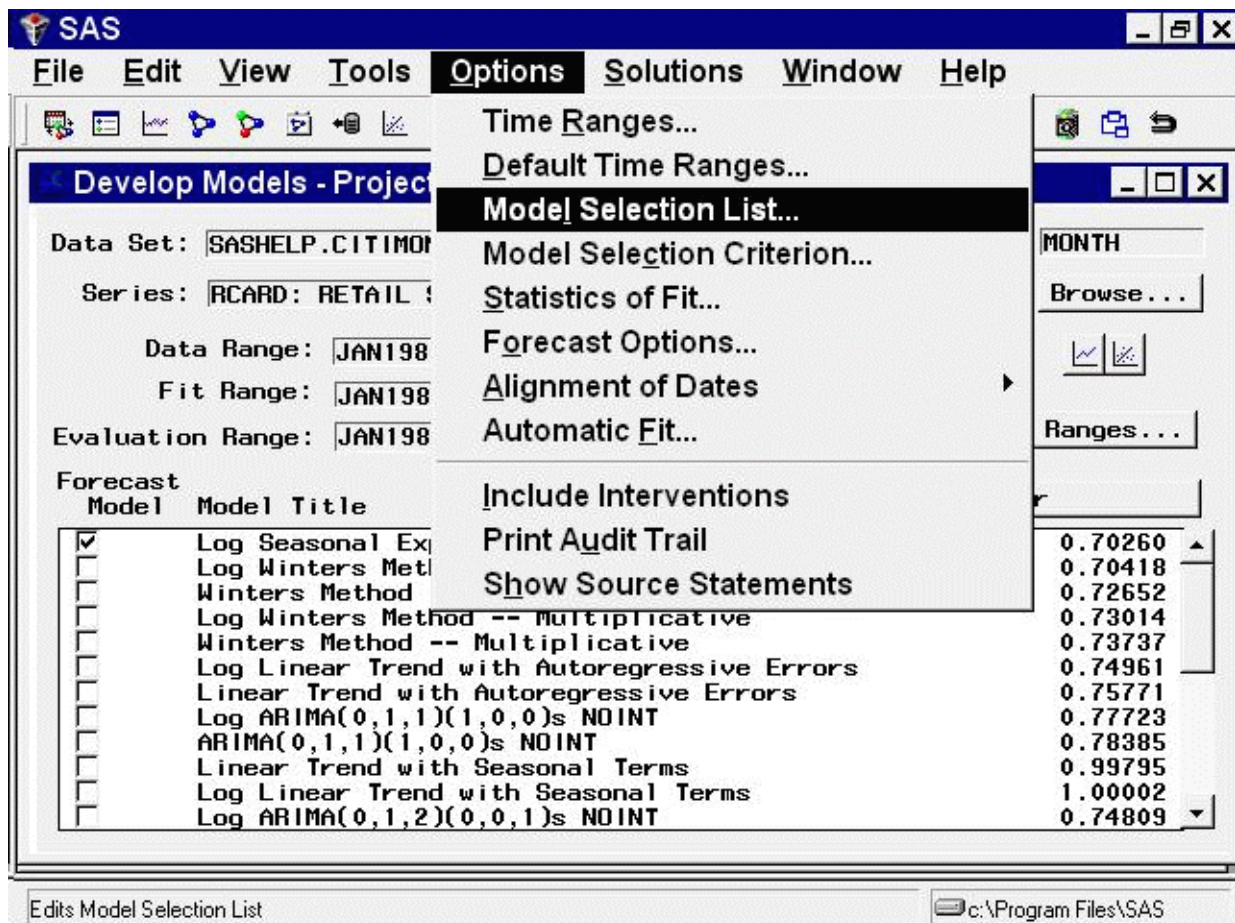
Now that you know how to specify new models that are not included in the system default model selection list, you can edit the model selection list to add models that you expect to use in the future or to delete models that you do not expect to use. When you save the forecasting project to a SAS catalog, the edited model selection list is saved with the project file, and the list is restored when you load the project.

There are two reasons why you would add a model to the model selection list. First, by adding the model to the list, you can fit the model to different time series by selecting it through the **Fit Models from List** action. You do not need to specify the model again every time you use it.

Second, once the model is added to the model selection list, it is available to the automatic model selection process. The model is then considered automatically whenever you use the automatic model selection feature for any series.

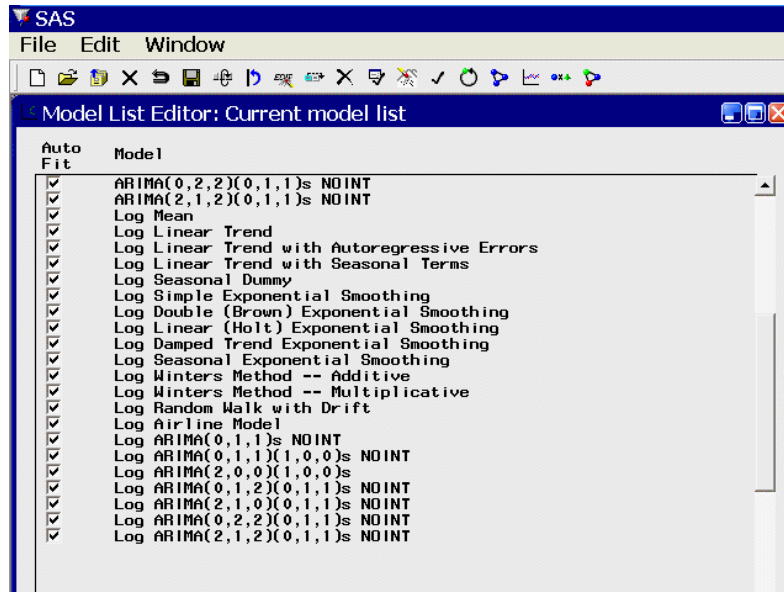
To edit the model selection list, select “Model Selection List” from the Options menu as shown in [Figure 45.25](#), or select the Edit Model List toolbar icon.

Figure 45.25 Model Selection List Option



This selection brings up the Model Selection List editor window, as shown in Figure 45.26. This window consists of the model selection list and an “Auto Fit” column, which controls for each model whether the model is included in the list of models used by the automatic model selection process.

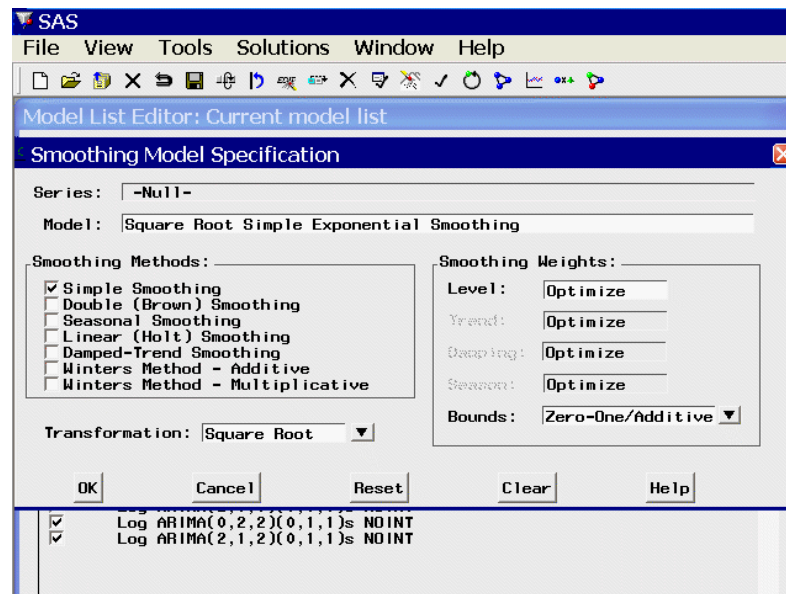
Figure 45.26 Model Selection List Window



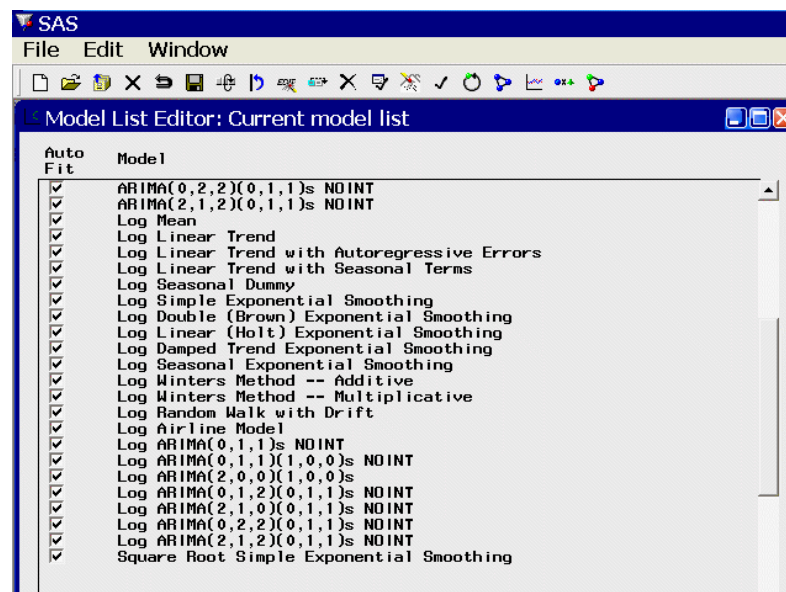
To add a model to the list, select “Add Model” from the Edit menu and then select “Smoothing Model,” “ARIMA Model,” “Factored ARIMA Model,” or “Custom Model” from the submenu. Alternatively, click the corresponding icon on the toolbar.

As an example, select “Smoothing Model.” This brings up the Smoothing Model Specification window. Note that the series name is “-Null-.” This means that you are not specifying a model to be fit to a particular series, but are specifying a model to be added to the selection list for later reference.

Specify a smoothing model. For example, select “Simple Smoothing” and then select the Square Root transformation. The window appears as shown in Figure 45.27.

Figure 45.27 Adding a Model Specification

Select the OK button to add the model to the end of the model selection list and return you to the Model Selection List window, as shown in Figure 45.28. You can now select the Fit Models from List model-fitting option to use the edited selection list.

Figure 45.28 Model Added to Selection List

If you want to delete one or more models from the list, select the model labels to highlight them in the list. Click a second time to clear a selected model. Then select "Delete" from the Edit pull-down menu, or the corresponding toolbar icon. As an example, delete the Square Root Simple Exponential Smoothing model that you just added.

The Model Selection List editor window gives you a lot of flexibility for managing multiple model lists, as explained in the section “[Model Selection List Editor Window](#)” on page 3049. For example, you can create your own model lists from scratch or modify or combine previously saved model lists and those provided with the software, and you can save them and designate one as the default for future projects.

Now select “Close” from the File menu (or the Close icon) to close the Model Selection List editor window.

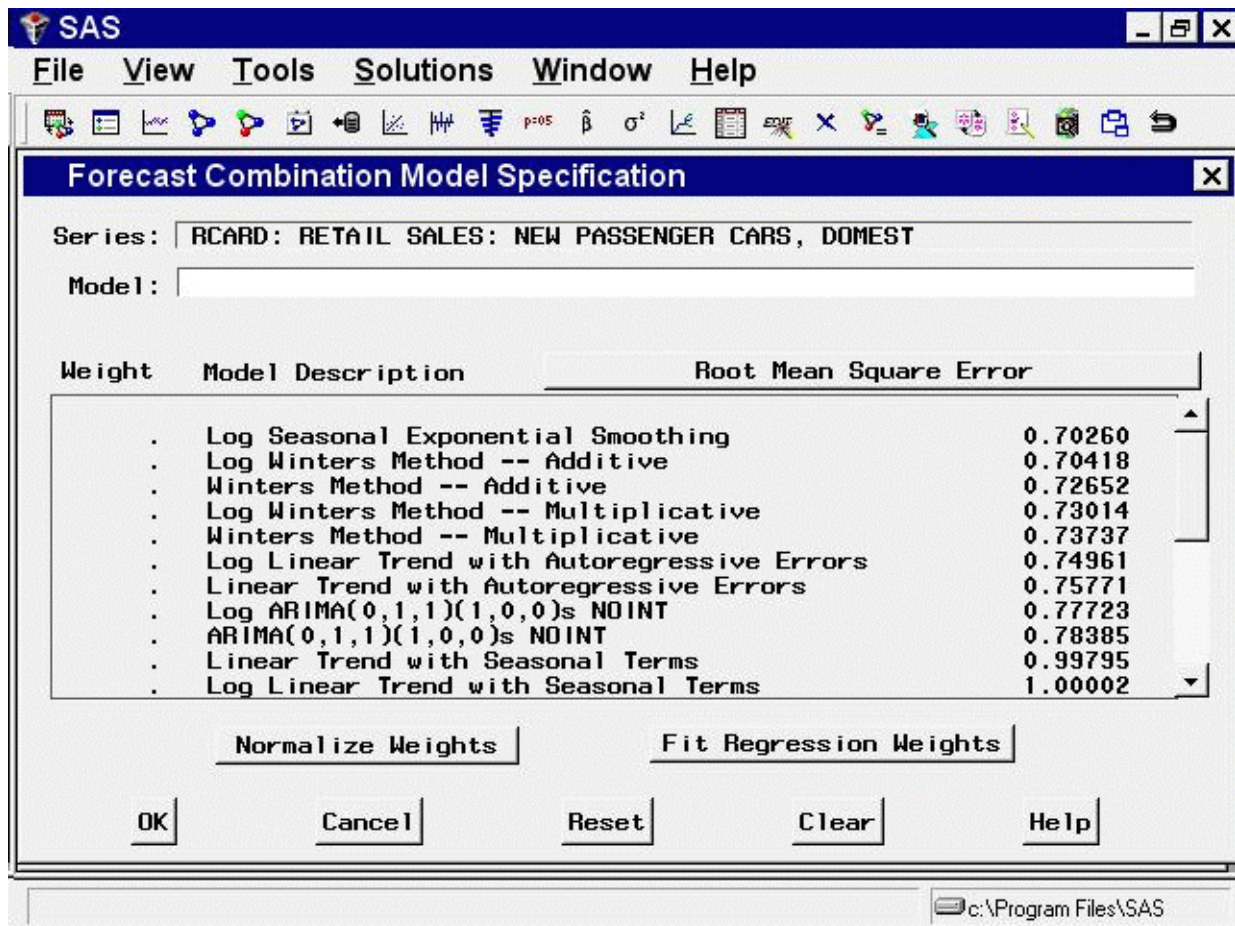
Forecast Combination Model Specification Window

Once you have fit several forecasting models to a series, you face the question of which model to use to produce the final forecasts. One possible answer is to combine or average the forecasts from several models. Combining the predictions from several different forecasting methods is a popular approach to forecasting.

The way that you produce forecast combinations with the Time Series Forecasting System is to use the Forecast Combination Model Specification window to specify a new forecasting model that performs the averaging of forecasts from the models you want to combine. This new model is added to the list of fitted models just like other models. You can then use the Model Viewer window features and Model Fit Comparison window features to examine the fit of the combined model.

To specify a forecast combination model, select “Combine Forecasts” from the pop-up menu or toolbar, or select “Edit” and “Fit Model” from the menu bar. This brings up the Forecast Combination Model Specification window, as shown in [Figure 45.29](#).

Figure 45.29 Forecast Combination Window



At the top of the Forecast Combination window is the name and label of the series and the label of the model you are specifying. The model label is filled in with an automatically generated label as you specify options. You can type over the automatic label with your own label for the model. To restore the automatic label, enter a blank label.

The middle part of the Forecast Combination window consists of the list of models that you have fit to the series. This table shows the label and goodness-of-fit measure for each model and the combining weight assigned to the model.

The **Weight** column controls how much weight is given to each model in the combined forecasts. A missing weight means that the model is not used. Initially, all the models have missing weight values.

You can enter the weight values you want to use in the **Weight** column. Alternatively, you can select models from the **Model Description** column, and weight values for the models you select are set automatically. To remove a model from the combination, select it again. This resets its weight value to missing.

At the bottom of the Forecast Combination window are two buttons: **Normalize Weights** and **Fit Regression Weights**. The **Normalize Weights** button adjusts the nonmissing weight values so that they sum to one. The **Fit Regression Weights** button uses linear regression to compute the weight values that produce the combination of model predictions with the best fit to the series.

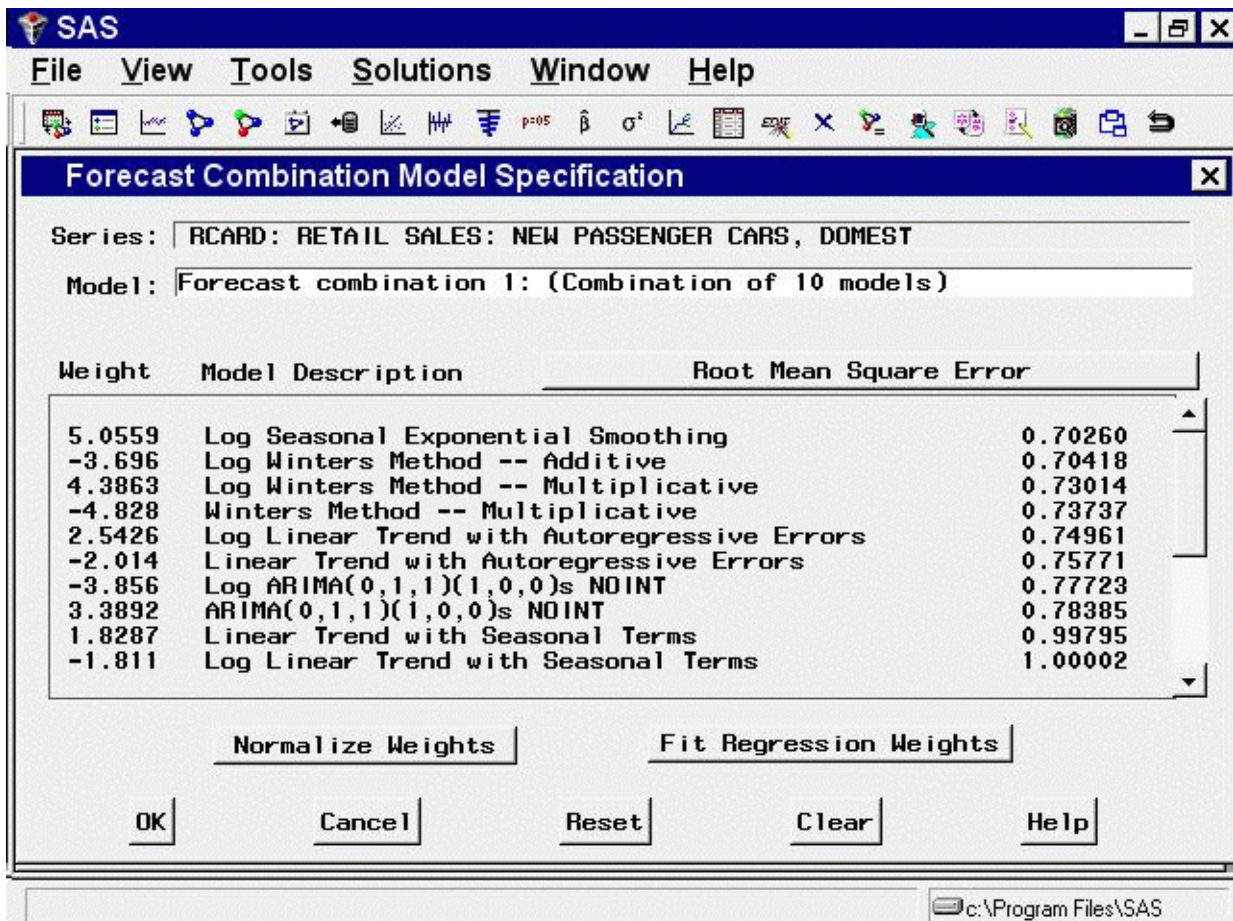
If no models are selected, the Fit Regression Weights button fits weights for all the models in the list. You can compute regression weights for only some of the models by first selecting the models you want to combine and then selecting Fit Regression Weights. In this case, only the nonmissing Weight values are replaced with regression weights.

As an example of how to combine forecasting models, select all the models in the list. After you have finished selecting the models, all the models in the list should now have equal weight values, which implies a simple average of the forecasts.

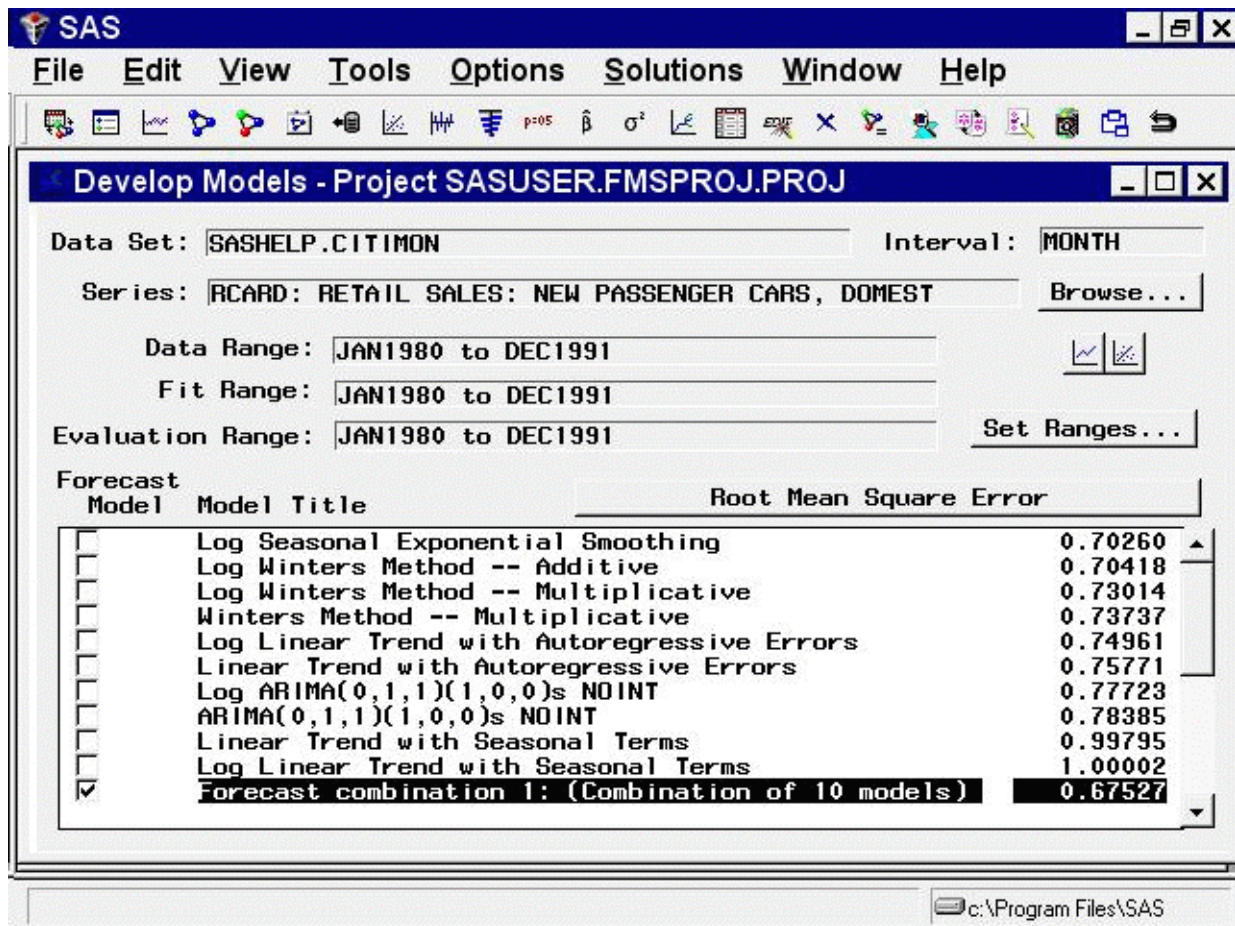
Now select the Fit Regression Weights button. The system performs a linear regression of the series on the predictions from the models with nonmissing weight values and replaces the weight values with the estimated regression coefficients. These are the combining weights that produce the smallest mean square prediction error within the sample.

The Forecast Combination window should now appear as shown in Figure 45.30. (Note that some of the regression weight values are negative.)

Figure 45.30 Combining Models



Select the OK button to fit the combined model. Now the Develop Models window shows this model to be the best fitting according to the root mean square error, as shown in Figure 45.31.

Figure 45.31 Develop Models Window Showing All Models Fit

Notice that the combined model has a smaller root mean square error than any one of the models included in the combination. The confidence limits for forecast combinations are produced by taking a weighted average of the mean square prediction errors for the component forecasts, ignoring the covariance between the prediction errors.

Incorporating Forecasts from Other Sources

You might have forecasts from other sources that you want to include in the forecasting process. Examples of other forecasts you might want to use are “best guess” forecasts based on personal judgments, forecasts produced by government agencies or commercial forecasting services, planning scenarios, and reference or “base line” projections. Because such forecasts are produced externally to the Time Series Forecasting System, they are referred to as external forecasts.

You can include external forecasts in combination models to produce compromise forecasts that split the difference between the external forecast and forecasting models that you fit. You can use external forecasts to compare them to the forecasts from models that are fit by the system.

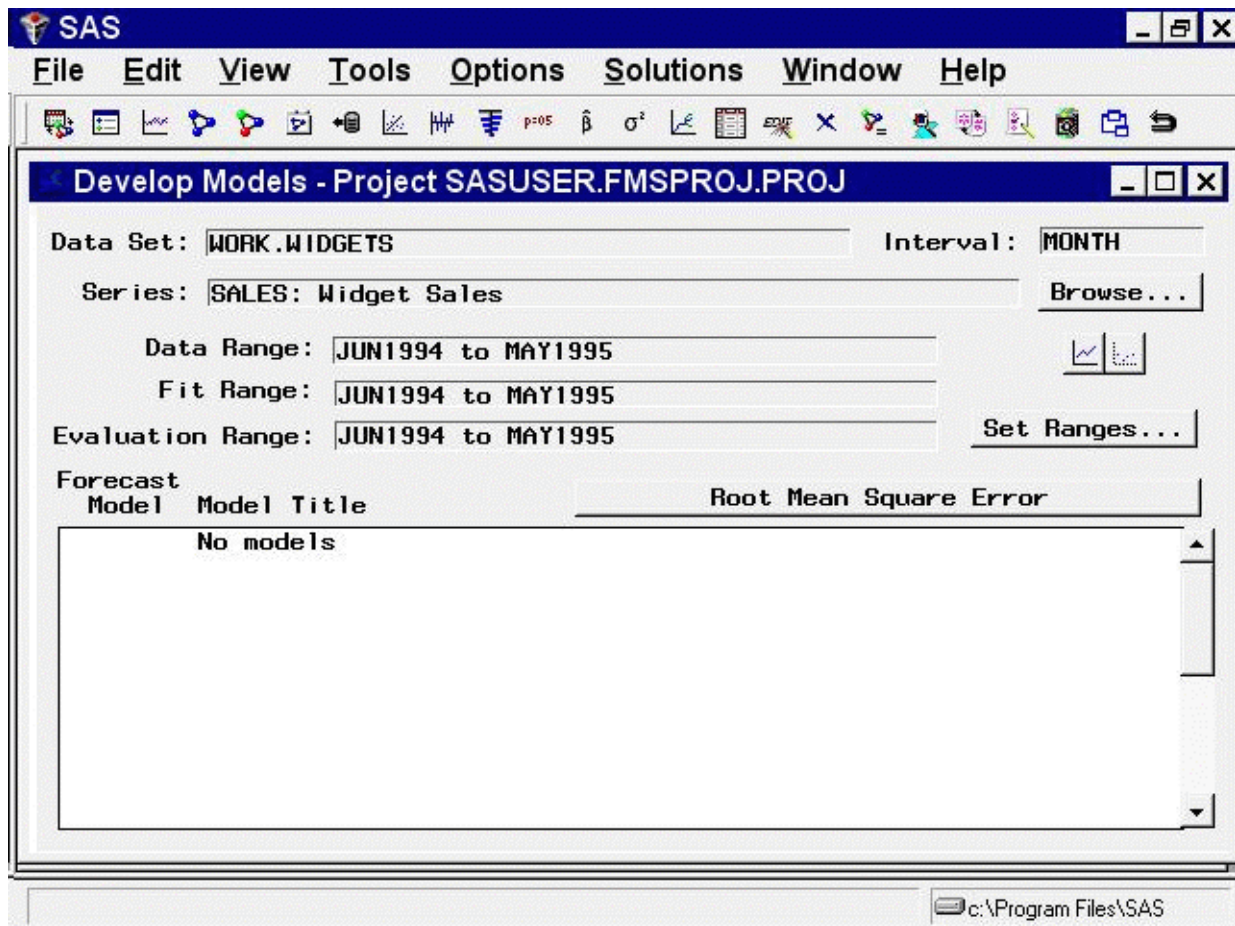
To include external forecasts in the Time Series Forecasting process, you must first supply the external forecast as a variable in the input data set. You then specify a special kind of forecasting “model” whose predictions are identical to the external forecast recorded in the data set.

As an example, suppose you have 12 months of sales data and five months of sales forecasts based on a consensus opinion of the sales staff. The following statements create a SAS data set containing made-up numbers for this situation.

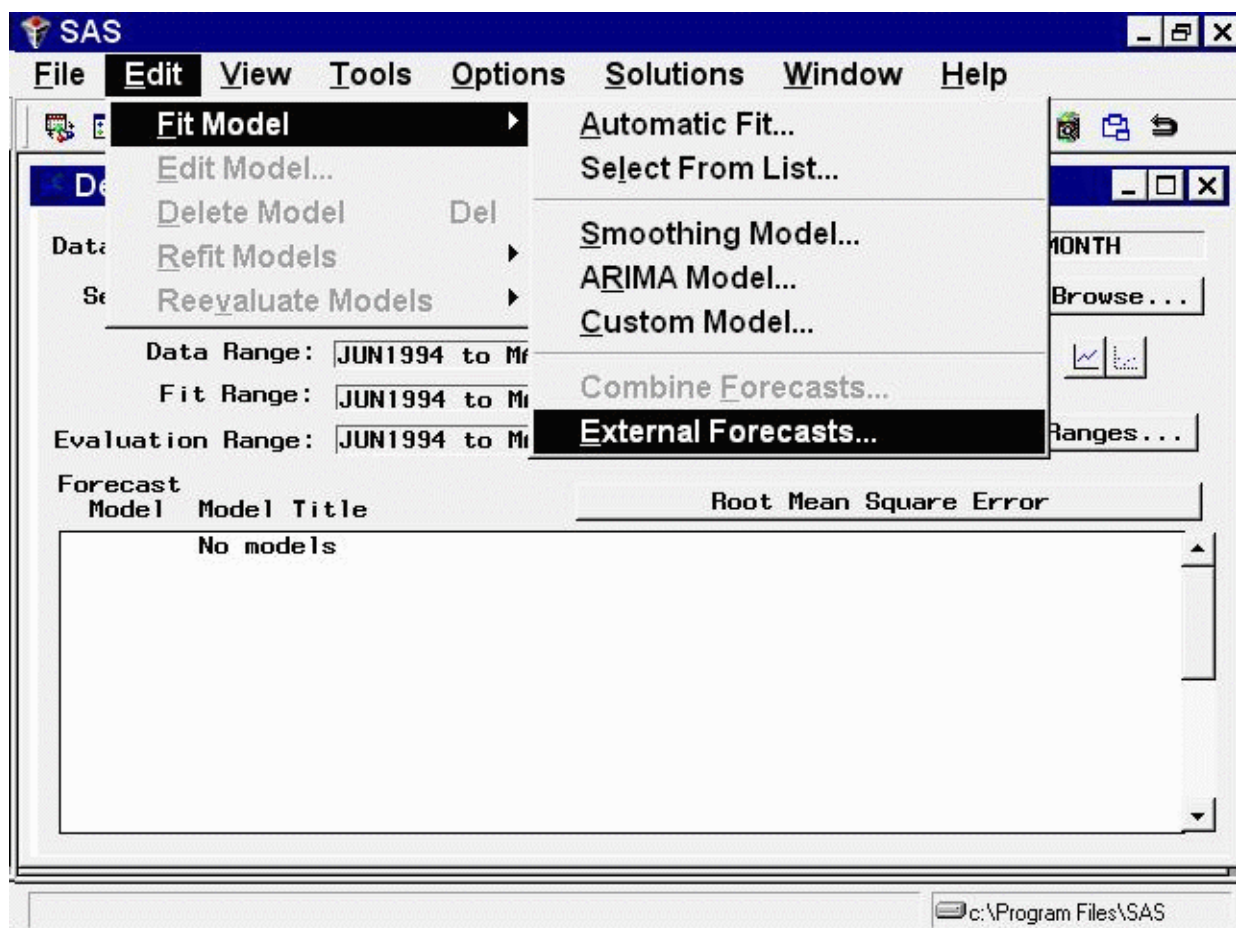
```
data widgets;
    input date monyy5. sales staff;
    format date monyy5.;
    label sales = "Widget Sales"
          staff = "Sales Staff Consensus Forecast";
    datalines;
jun94  142.1    .
jul94   139.6    .
aug94   145.0    .
sep94   150.2    .
oct94   151.1    .
nov94   154.3    .
dec94   158.7    .
jan95   155.9    .
feb95   159.2    .
mar95   160.8    .
apr95   162.0    .
may95   163.3    .
jun95    . 166.
jul95    . 168.
aug95    . 170.
sep95    . 171.
oct95    . 177.
run;
```

Submit the preceding statements in the SAS Program Editor window. From the Time Series Forecasting window, select “Develop Models.” In the Series Selection window, select the data set WORK.WIDGETS and the variable SALES. The Develop Models window should now appear as shown in [Figure 45.32](#).

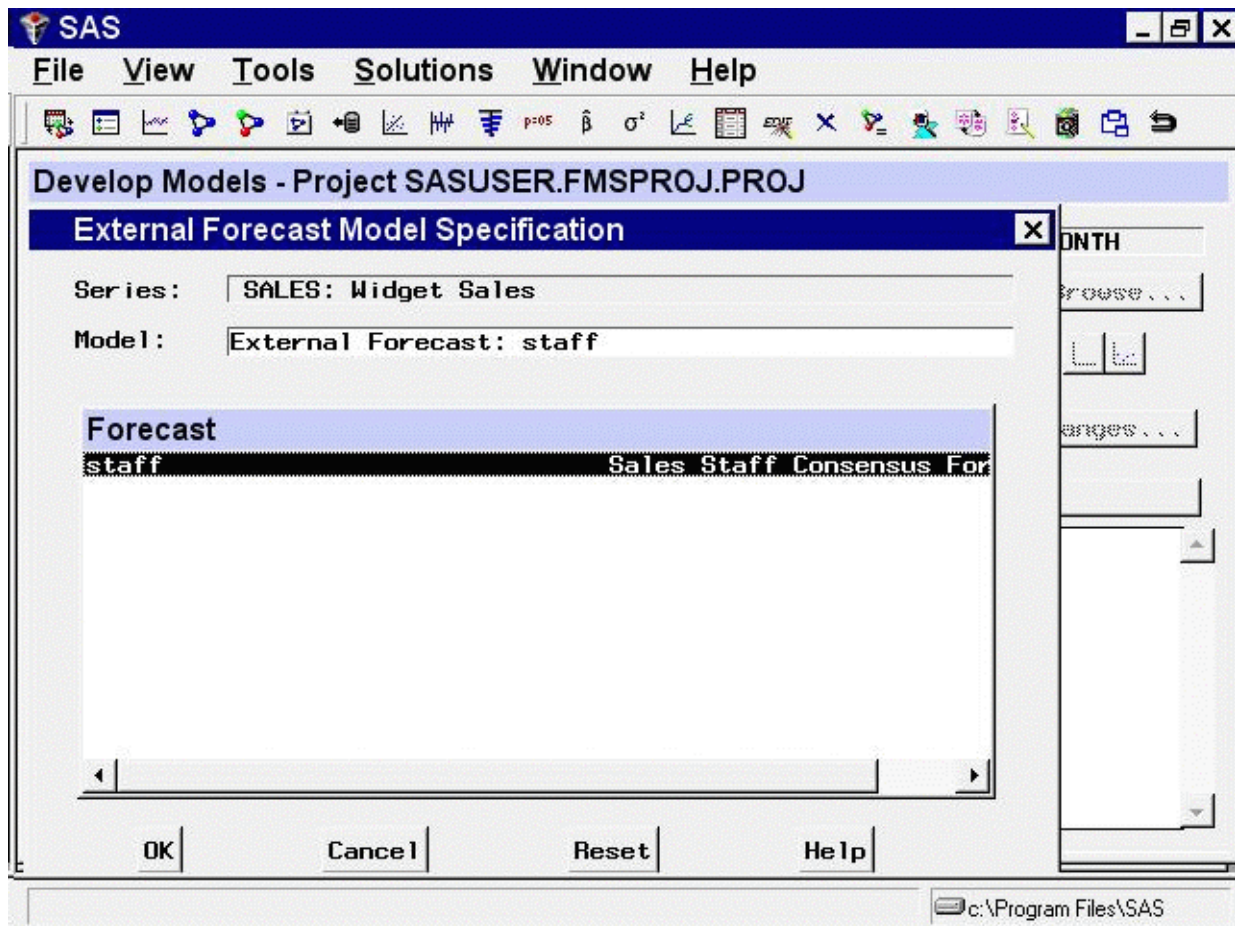
Figure 45.32 Develop Models Window



Now select “Edit,” “Fit Model,” and “External Forecasts” from the menu bar of the Develop Models window, as shown in Figure 45.33, or the Use External Forecasts toolbar icon.

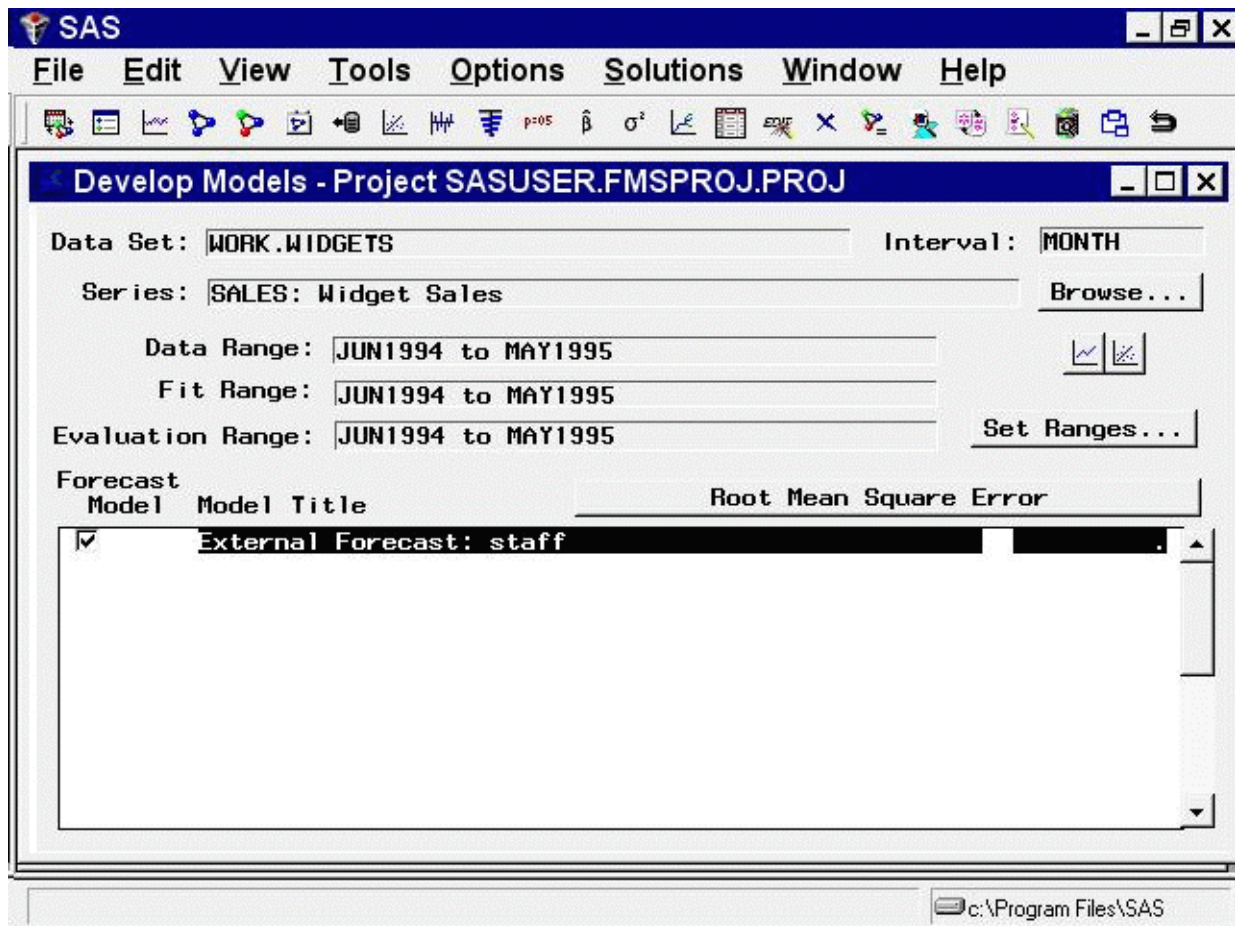
Figure 45.33 Adding a Model for an External Forecast Series

This selection opens the External Forecast Model Specification window. Select the STAFF variable as shown in Figure 45.34.

Figure 45.34 External Forecast Series Selected

Select the OK button. The external forecast model is now “fit” and added to the Develop Models list, as shown in [Figure 45.35](#).

Figure 45.35 Model for External Forecast



You can now use this model for comparison with the predictions from other forecasting models that you fit, or you can include it in a forecast combination model.

Note that no fitting is actually performed for an external forecast model. The predictions of the external forecast model are simply the values of the external forecast series read from the input data set. The goodness-of-fit statistics for such models will depend on the values that the external forecast series contains for observations within the period of fit. In this case, no STAFF values are given for past periods, and therefore the fit statistics for the model are missing.

Chapter 46

Choosing the Best Forecasting Model

Contents

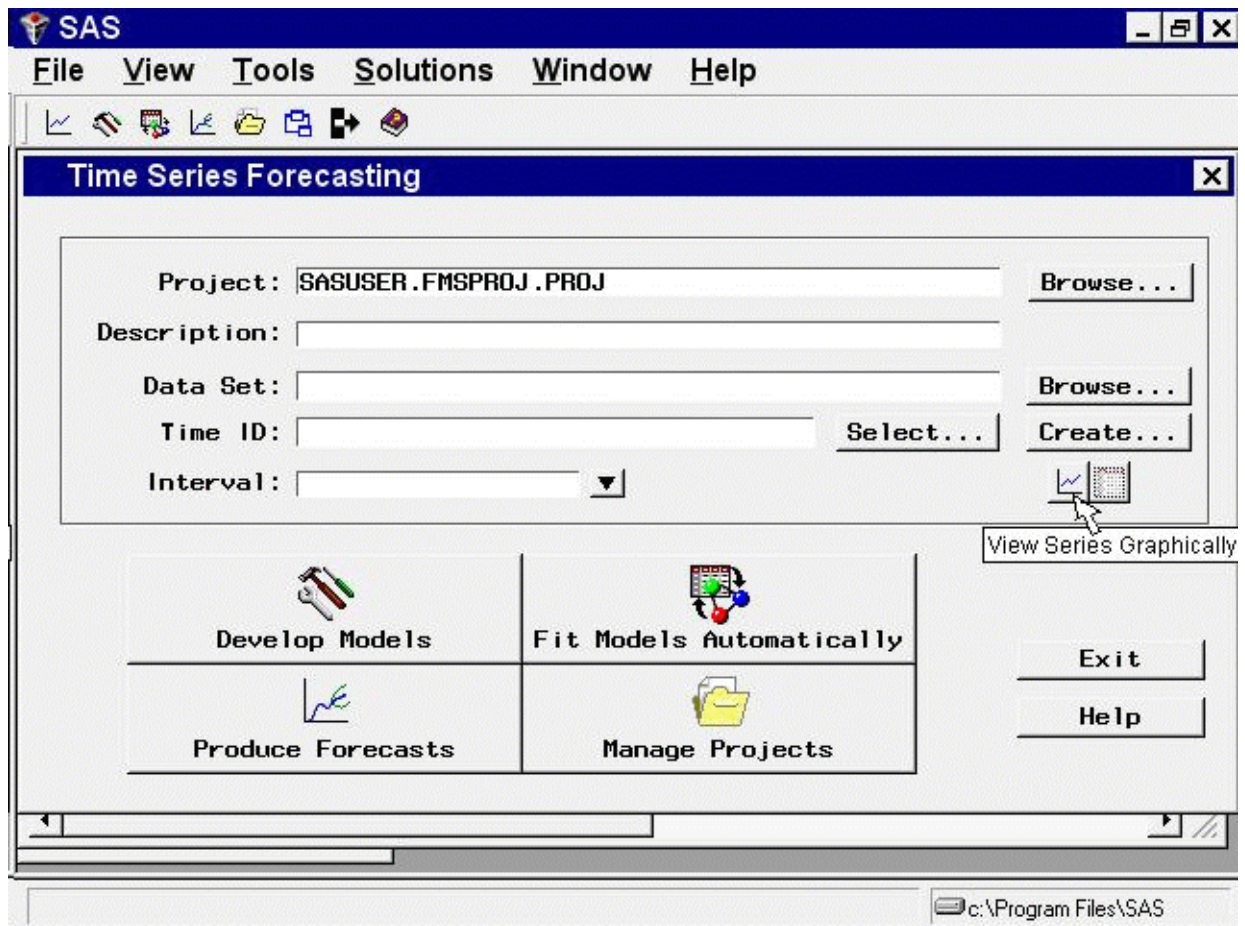
Time Series Viewer Features	2933
Model Viewer Prediction Error Analysis	2940
The Model Selection Criterion	2944
Sorting and Selecting Models	2946
Comparing Models	2947
Controlling the Period of Evaluation and Fit	2948
Refitting and Reevaluating Models	2949
Using Hold-out Samples	2949

The Time Series Forecasting System provides a variety of tools for identifying potential forecasting models and for choosing the best fitting model. It allows you to decide how much control you want to have over the process, from a hands-on approach to one that is completely automated. This chapter begins with an exploration of the tools available through the Series Viewer and Model Viewer. It presents an example of identifying models graphically and exercising your knowledge of model properties. The remainder of the chapter shows you how to compare models by using a variety of statistics and by controlling the fit and evaluation time ranges. It concludes by showing you how to refit existing models and how to compare models using hold-out samples.

Time Series Viewer Features

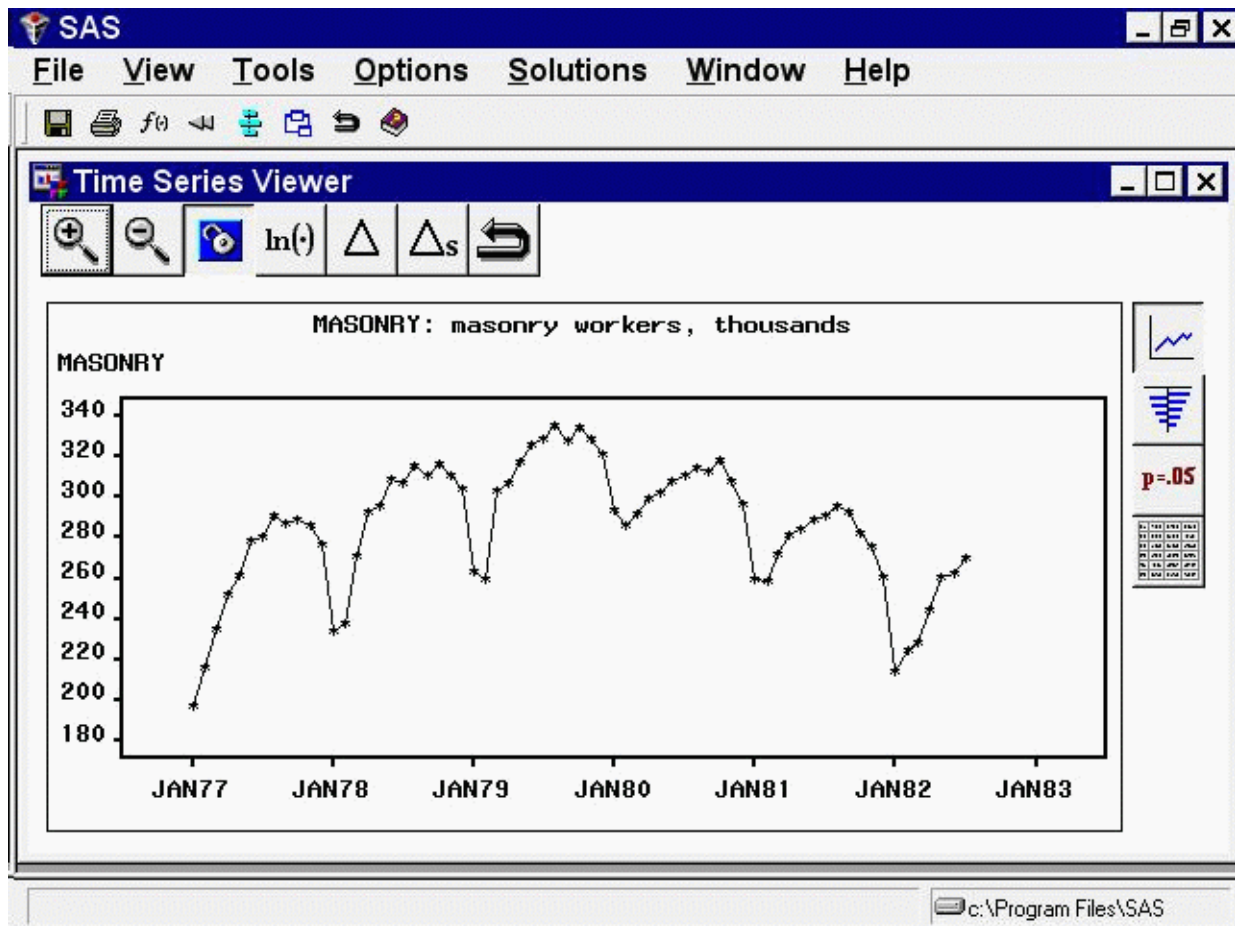
The Time Series Viewer is a graphical tool for viewing and analyzing time series. It can be used separately from the Time Series Forecasting System by using the TSVIEW command or by selecting Time Series Viewer from the Analysis pull-down menu under Solutions.

In this chapter you will use the Time Series Viewer to examine plots of your series before fitting models. Begin this example by invoking the Forecasting system and selecting the View Series Graphically button, as shown in Figure 46.1, or the View Series toolbar icon.

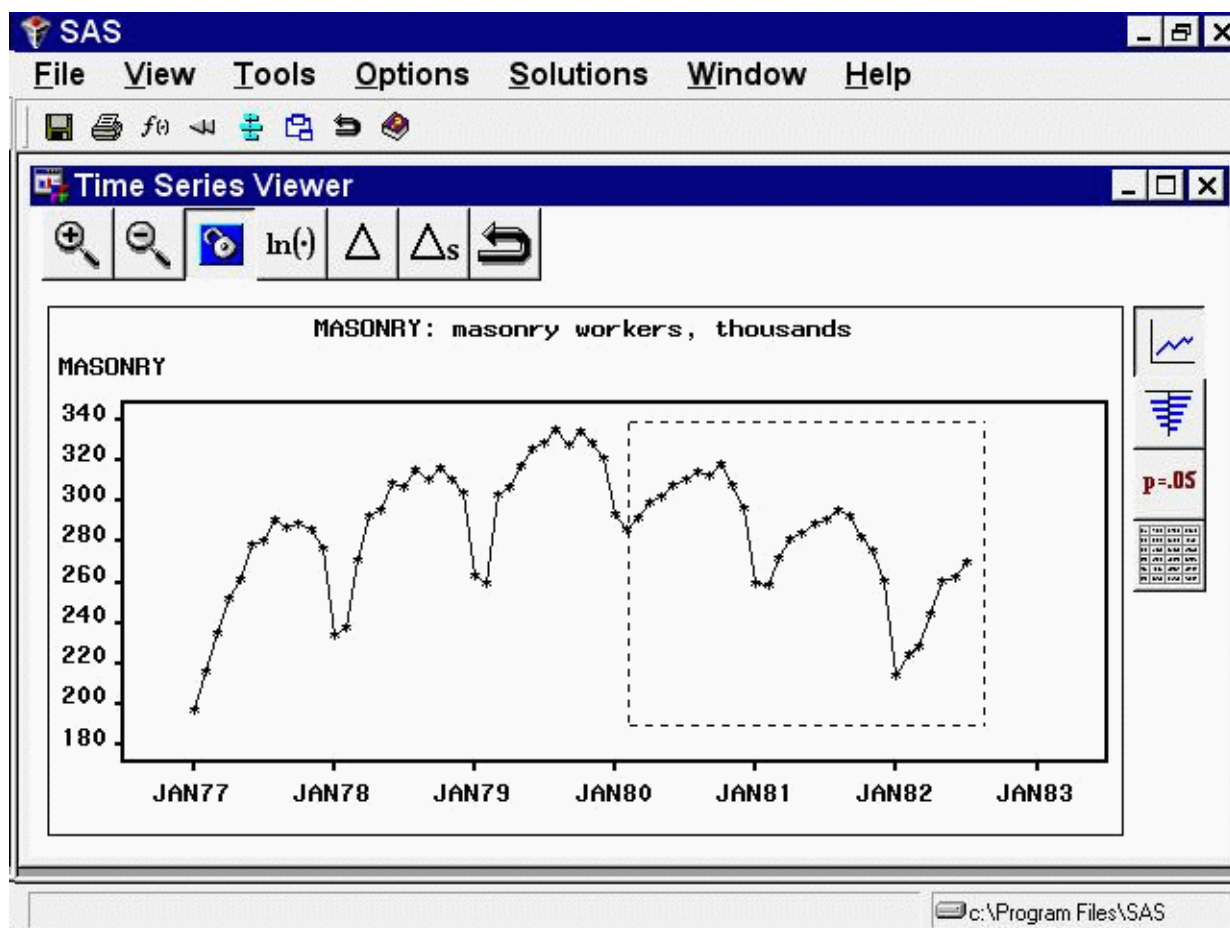
Figure 46.1 Invoking the Time Series Viewer

From the Series Selection window, select SASHELP as the library, WORKERS as the data set, and MASONRY as the time series, and then click the *Graph* button. The Time Series Viewer displays a plot of the series, as shown in [Figure 46.2](#).

Figure 46.2 Series Plot

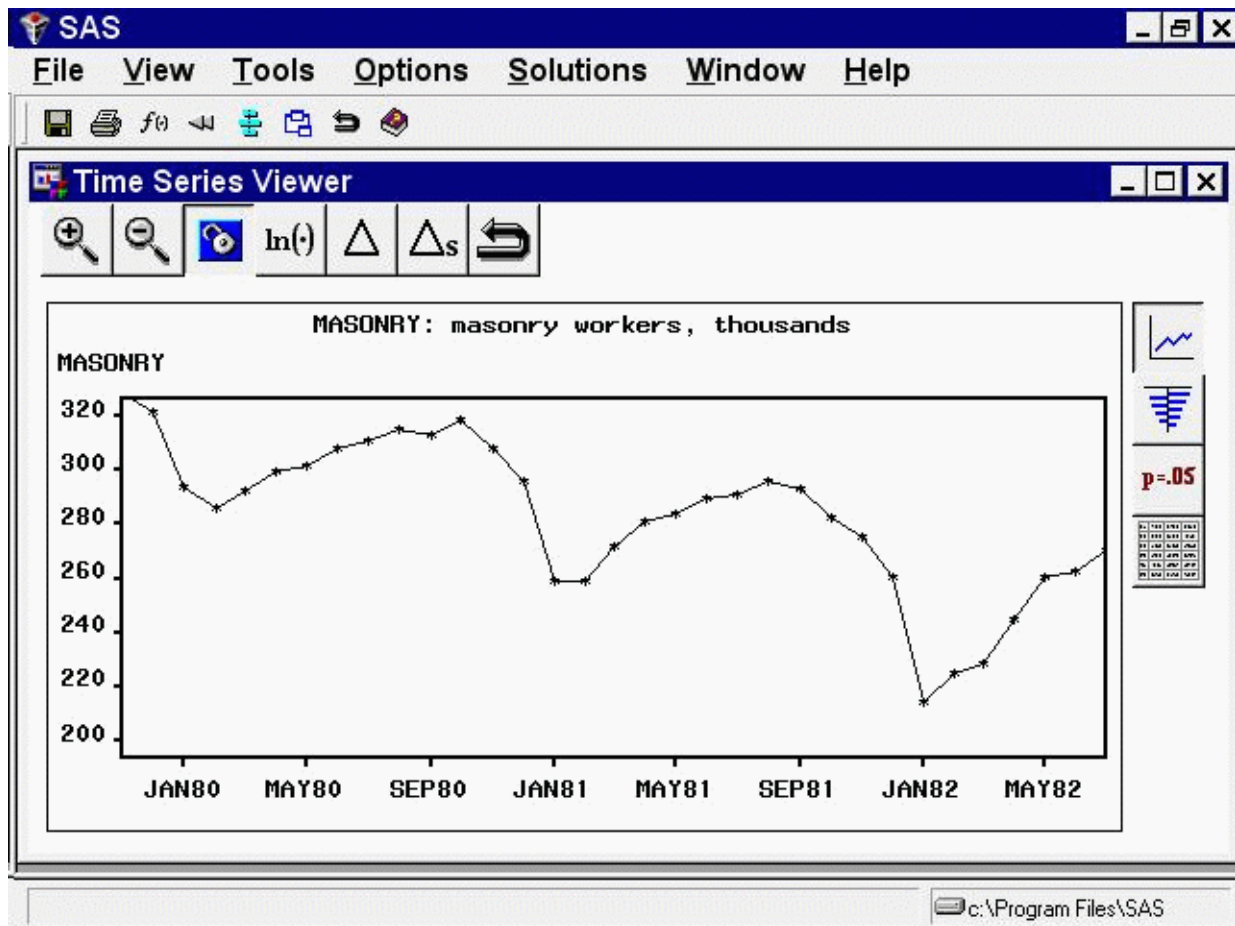


Select the Zoom In icon, the first one on the window's horizontal toolbar. Notice that the mouse cursor changes shape and that "Note: Click on a corner of the region, then drag to the other corner" appears on the message line. Outline an area, as shown in Figure 46.3, by clicking the mouse at the upper-left corner, holding the button down, dragging to the lower-right corner, and releasing the button.

Figure 46.3 Selecting an Area for Zoom

The zoomed plot should appear as shown in [Figure 46.4](#).

Figure 46.4 Zoomed Plot



You can repeat the process to zoom in still further. To return to the previous view, select the Zoom Out icon, the second icon on the window's horizontal toolbar.

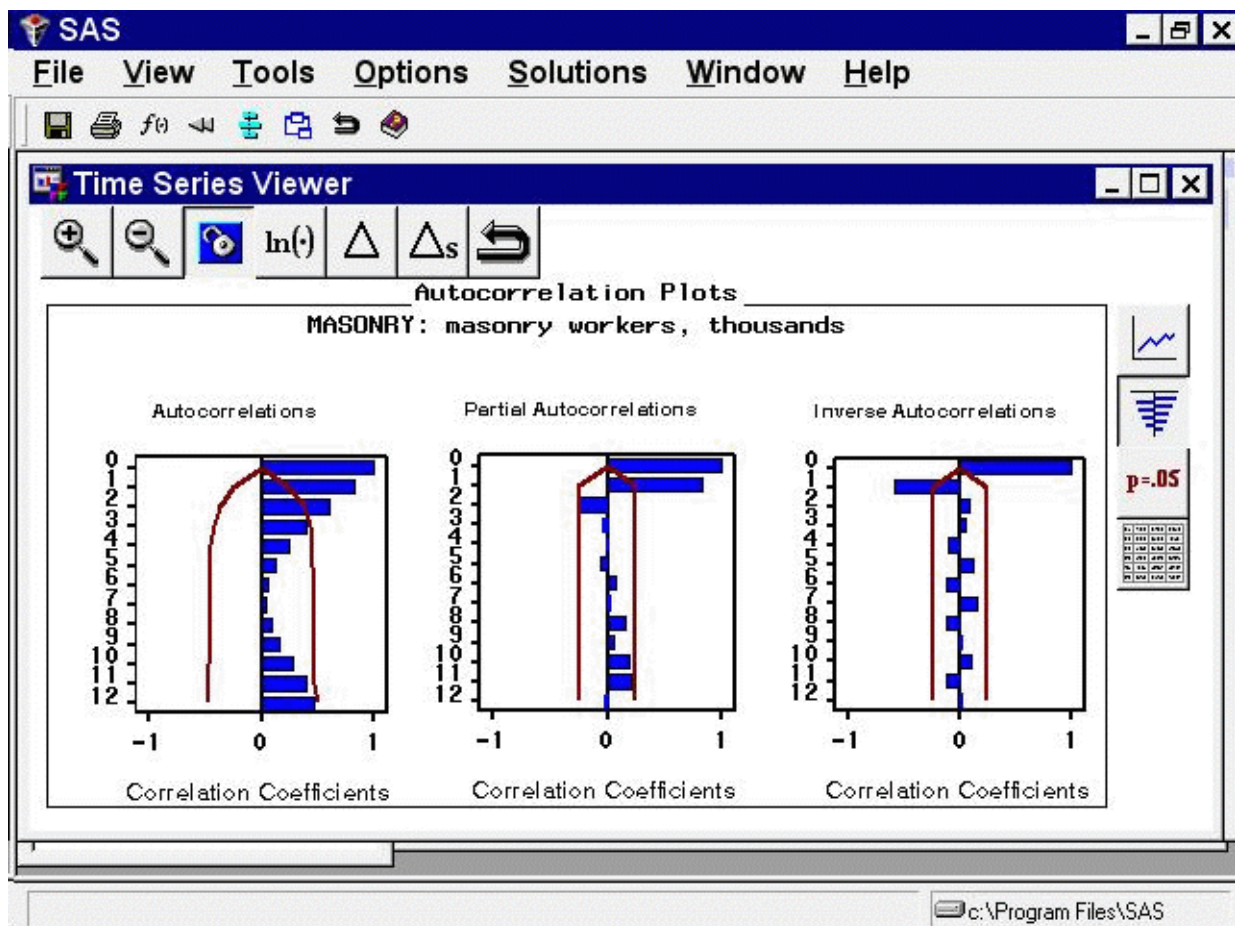
The third icon on the horizontal toolbar is used to link or unlink the viewer window. By default, the viewer is linked, meaning that it is automatically updated to reflect selection of a different time series. To see this, return to the Series Selection window by clicking on it or using the Window menu or Next Viewer toolbar icon. Select the Electric series in the Time Series Variables list box. Notice that the Time Series Viewer window is updated to show a plot of the ELECTRIC series. Select the Link/Unlink icon if you prefer to unlink the viewer so that it is not automatically updated in this way. Successive selections toggle between the linked and unlinked state. A note on the message line informs you of the state of the Time Series Viewer window.

When a Time Series Viewer window is linked, selecting View Series again makes the linked Viewer window active. When no Time Series Viewer window is linked, selecting View Series opens an additional Time Series Viewer window. You can bring up as many Time Series Viewer windows as you want.

Having seen the plot in Figure 46.2, you might suspect that the series is nonstationary and seasonal. You can gain further insight into this by examining the sample autocorrelation function (ACF), partial autocorrelation function (PACF), and inverse autocorrelation function (IACF) plots. To switch the display to the autocorrelation plots, select the second icon from the top on the vertical toolbar at the right side of the Time

Series Viewer. The plot appears as shown in Figure 46.5.

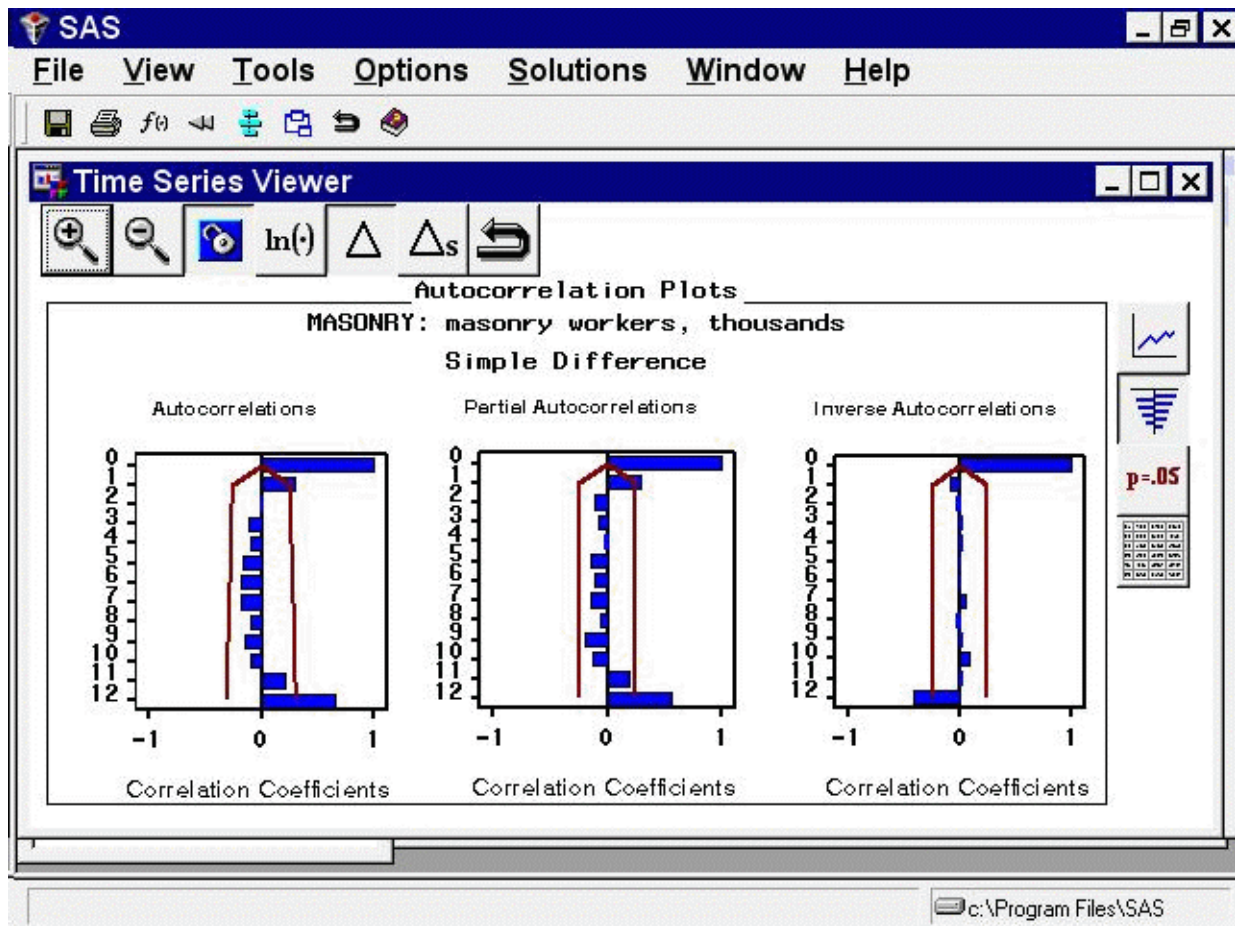
Figure 46.5 Sample Autocorrelation Plots



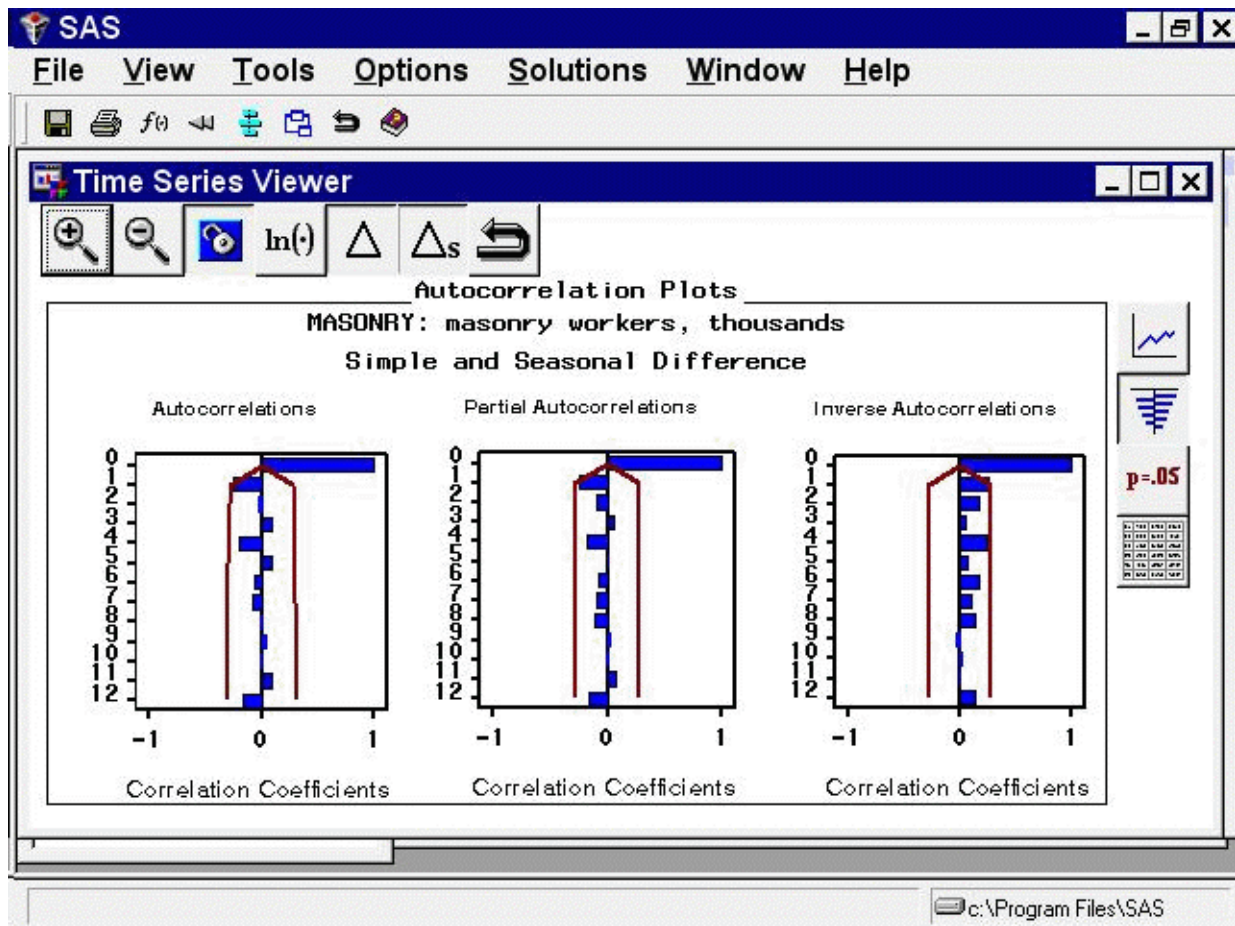
Each bar represents the value of the correlation coefficient at the given lag. The overlaid lines represent confidence limits computed at plus and minus two standard errors. You can switch the graphs to show significance probabilities by selecting **Correlation Probabilities** under the **Options** pull-down menu, or by selecting the **Toggle ACF Probabilities** toolbar icon.

The slow decline of the ACF suggests that first differencing might be warranted. To see the effect of first differencing, select the simple difference icon, the fifth icon from the left on the window's horizontal toolbar. The plot now appears as shown in Figure 46.6.

Figure 46.6 ACF Plots with First Difference Applied



Since the ACF still displays slow decline at seasonal lags, seasonal differencing is appropriate (in addition to the first differencing already applied). Select the *Seasonal Difference* icon, the sixth icon from the left on the horizontal toolbar. The plot now appears as shown in Figure 46.7.

Figure 46.7 ACF Plot with Simple and Seasonal Differencing

Model Viewer Prediction Error Analysis

Leave the Time Series Viewer open for the remainder of this exercise. Drag it out of the way or push it to the background so that you can return to the Time Series Forecasting window. Select **Develop Models**, then click an empty part of the table to bring up the pop-up menu, and select **Fit ARIMA Model**. Define the $ARIMA(0,1,0)(0,1,0)_s$ model by selecting 1 for Differencing under ARIMA Options, 1 for Differencing under Seasonal ARIMA Options, and No for Intercept, as shown in Figure 46.8.

Figure 46.8 Specifying the ARIMA(0,1,0)(0,1,0)_s Model

SAS

File View Tools Solutions Window Help

ARIMA Model Specification

Series:

Model:

ARIMA Options:

Autoregressive: p=

Differencing: d=

Moving Average: q=

Seasonal ARIMA Options:

Autoregressive: P=

Differencing: D=

Moving Average: Q=

Transformation:

Intercept: ☐ Yes ☒ No

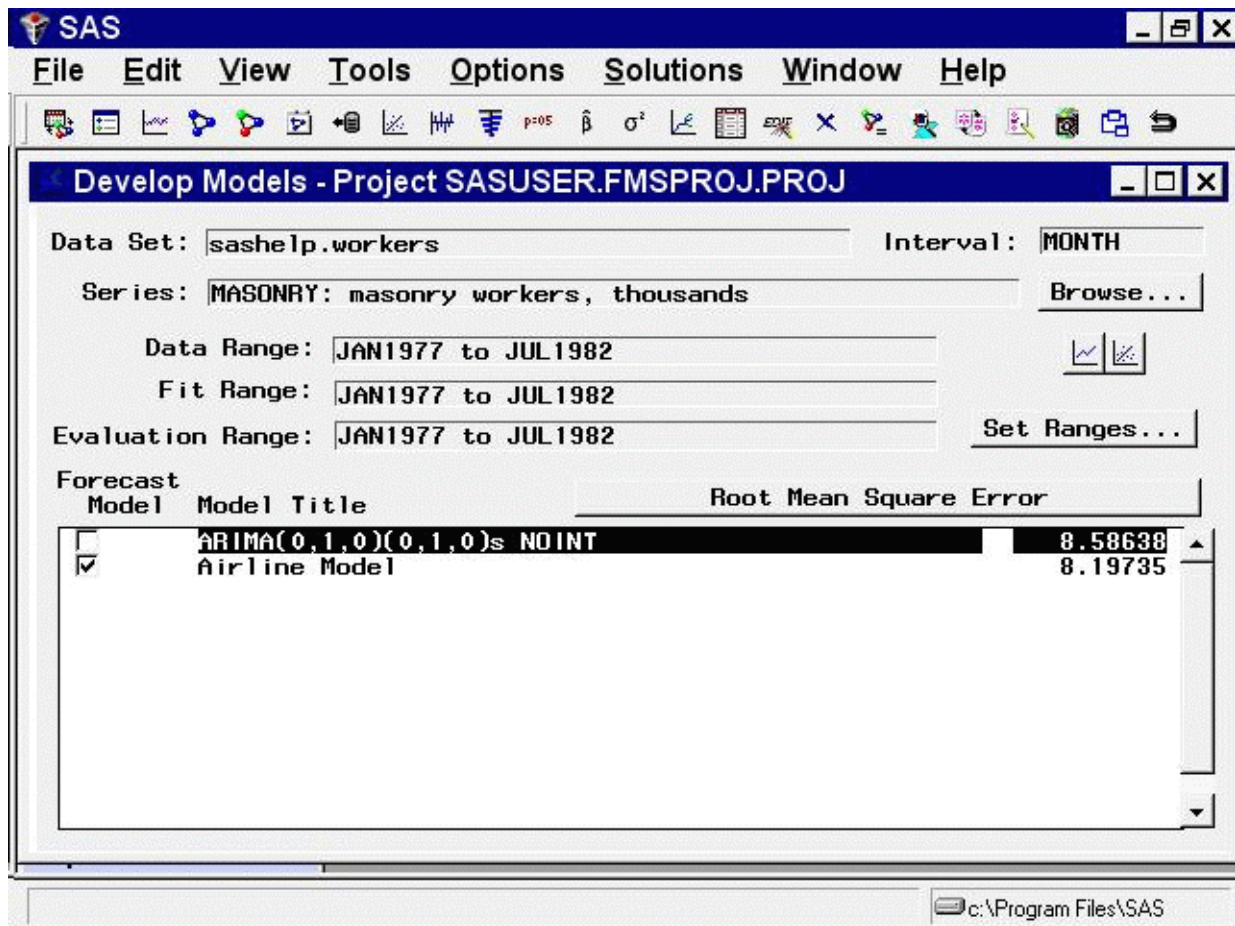
Predictors

OK Cancel Reset Clear Add... Delete Edit... Help

c:\Program Files\SAS

When you select the **OK** button, the model is fit and you are returned to the Develop Models window. Click on an empty part of the table and choose **Fit Models from List** from the pop-up menu. Select **Airline Model** from the window. (Airline Model is a common name for the ARIMA(0,1,1)(0,1,1)_s model, which is often used for seasonal data with a linear trend.) Select the **OK** button. Once the model has been fit, the table shows the two models and their root mean square errors. Notice that the Airline Model provides only a slight improvement over the differencing model, ARIMA(0,1,0)(0,1,0)_s. Select the first row to highlight the differencing model, as shown in [Figure 46.9](#).

Figure 46.9 Selecting a Model

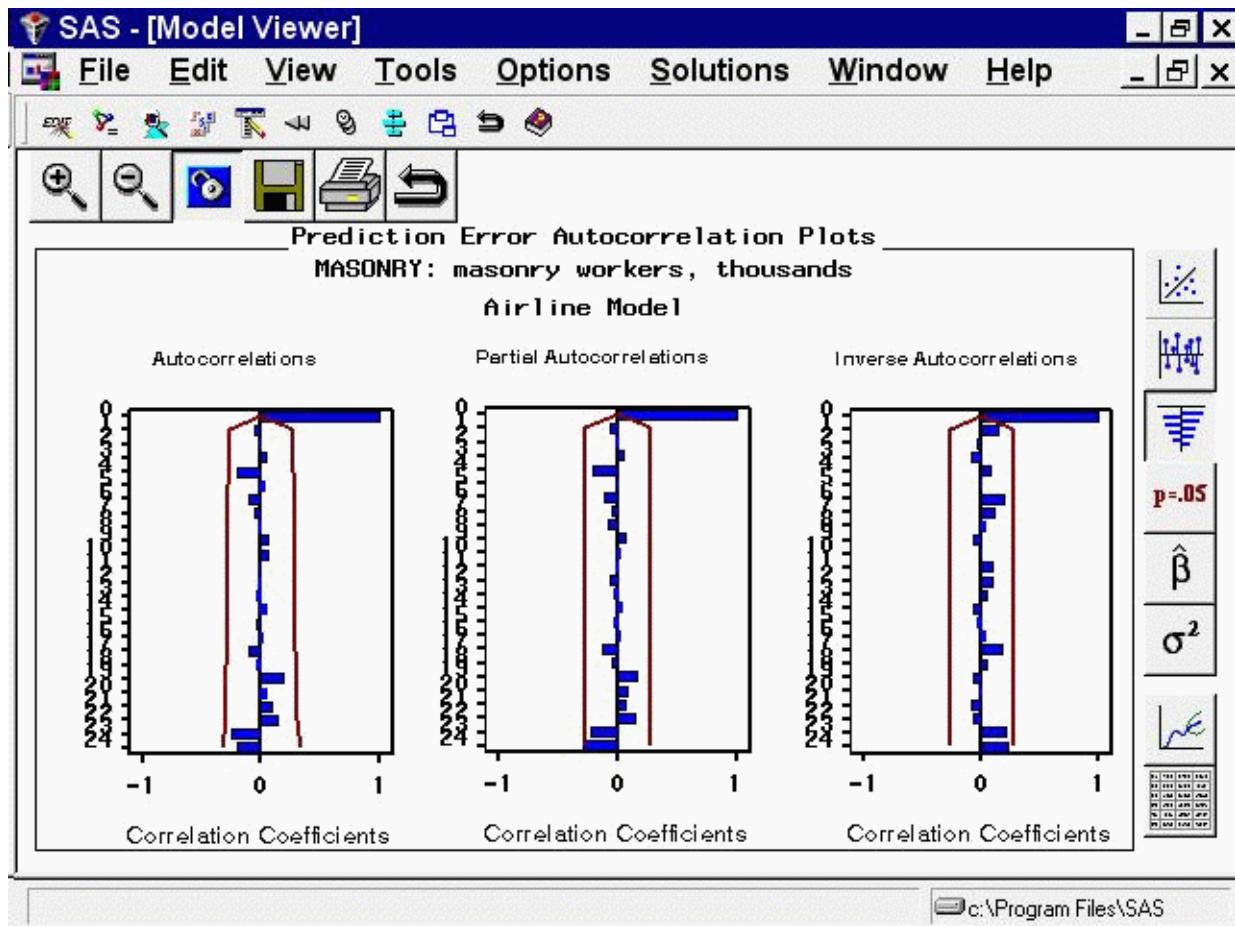


Now select the **View Selected Model Graphically** button, below the **Browse** button at the right side of the **Develop Models** window. The **Model Viewer** window appears, showing the actual data and model predictions for the **MASONRY** series. (Note that predicted values are missing for the first 13 observations due to simple and seasonal differencing.)

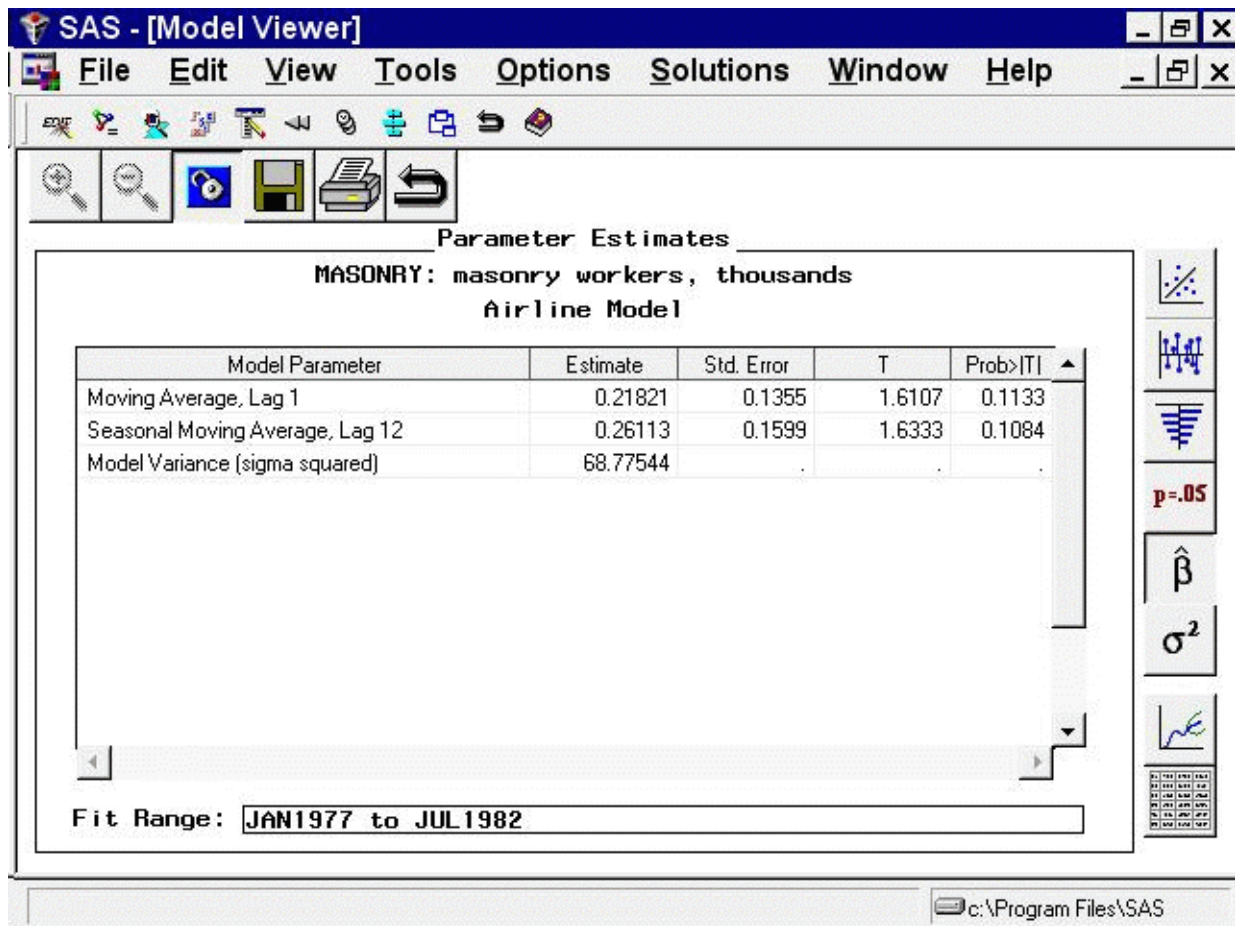
To examine the ACF plot for the model prediction errors, select the third icon from the top on the vertical toolbar. For this model, the prediction error ACF is the same as the ACF of the original data with first differencing and seasonal differencing applied. This differencing is apparent if you bring the **Time Series Viewer** back into view for comparison.

Return to the **Develop Models** Window by clicking on it or using the window pull-down menu or the **Next Viewer** toolbar icon. Select the second row of the table in the **Develop Models** window to highlight the **Airline Model**. The **Model Viewer** is automatically updated to show the prediction error ACF of the newly selected model, as shown in [Figure 46.10](#).

Figure 46.10 Prediction Error ACF Plot for the Airline Model



Another helpful tool available within the Model Viewer is the parameter estimates table. Select the fifth icon from the top of the vertical toolbar. The table gives the parameter estimates for the two moving-average terms in the Airline Model, as well as the model residual variance, as shown in Figure 46.11.

Figure 46.11 Parameter Estimates for the Airline Model

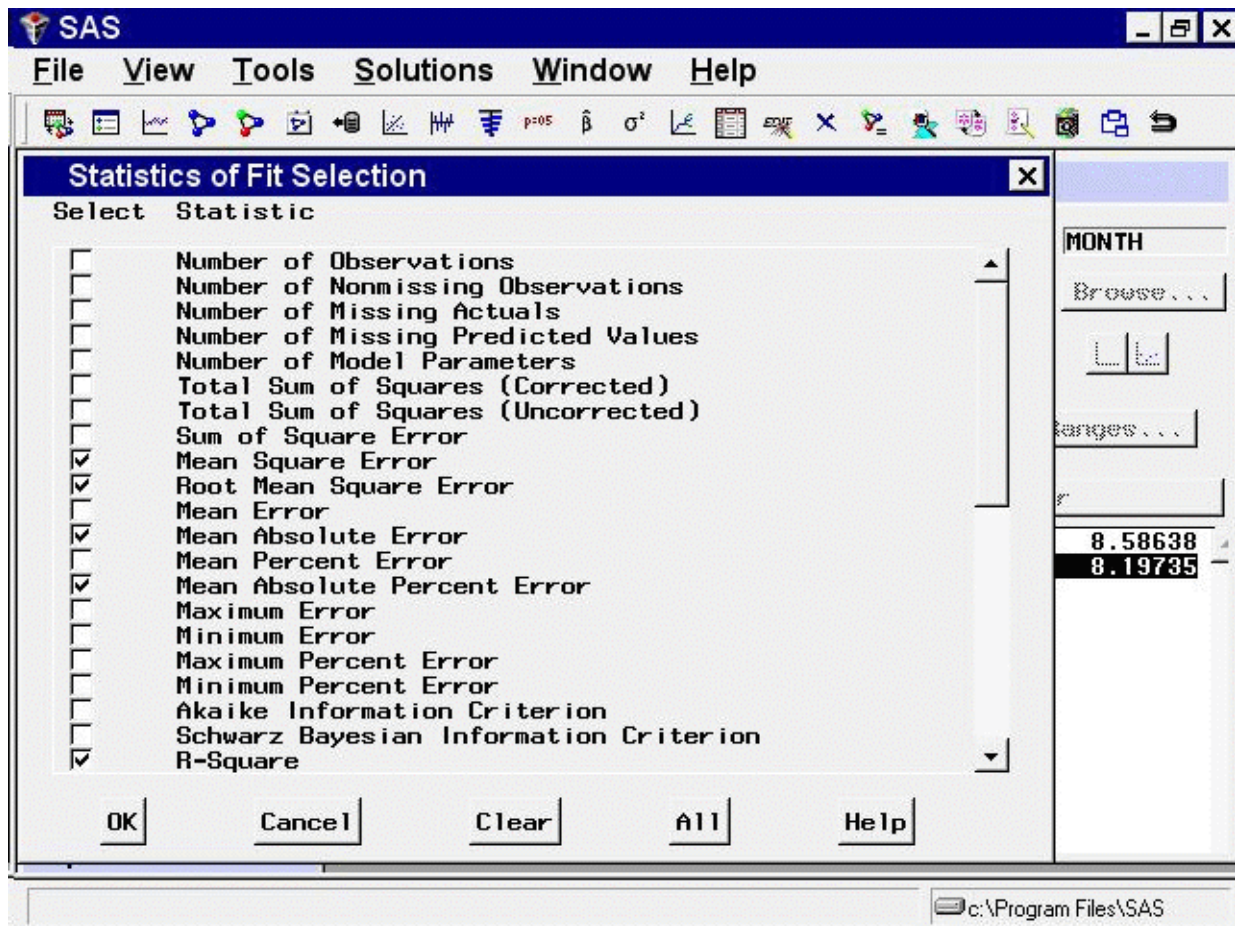
You can adjust the column widths in the table by dragging the vertical borders of the column titles with the mouse. Notice that neither of the parameter estimates is significantly different from zero at the 0.05 level of significance, since $\text{Prob}>|t|$ is greater than 0.05. This suggests that the Airline Model should be discarded in favor of the more parsimonious differencing model, which has no parameters to estimate.

The Model Selection Criterion

Return to the Develop Models window (Figure 46.9) and notice the Root Mean Square Error button at the right side of the table banner. This is the model selection criterion—the statistic used by the system to select the best fitting model. So far in this example you have fit two models and have left the default criterion, root mean square error (RMSE), in effect. Because the Airline Model has the smaller value of this criterion and because smaller values of the RMSE indicate better fit, the system has chosen this model as the forecasting model, indicated by the check box in the `Forecast Model` column.

The statistics available as model selection criteria are a subset of the statistics available for informational purposes. To access the entire set, select `Options` from the menu bar, and then select `Statistics of Fit`. The `Statistics of Fit Selection` window appears, as shown in Figure 46.12.

Figure 46.12 Statistics of Fit



By default, five of the more well known statistics are selected. You can select and deselect statistics by clicking the check boxes in the left column. For this exercise, select **All**, and notice that all the check boxes become checked. Select the **OK** button to close the window. Now if you choose **Statistics of Fit** in the **Model Viewer** window, all of the statistics will be shown for the selected model.

To change the model selection criterion, click the **Root Mean Square Error** button or select **Options** from the menu bar and then select **Model Selection Criterion**. Notice that most of the statistics of fit are shown, but those which are not relevant to model selection, such as number of observations, are not shown. Select **Schwarz Bayesian Information Criterion** and click **OK**. Since this statistic puts a high penalty on models with larger numbers of parameters, the **ARIMA(0,1,0)(0,1,0)s** model comes out with the better fit.

Notice that changing the selection criterion does not automatically select the model that is best according to that criterion. You can always choose the model you want to use for forecasts by selecting its check box in the **Forecast Model** column.

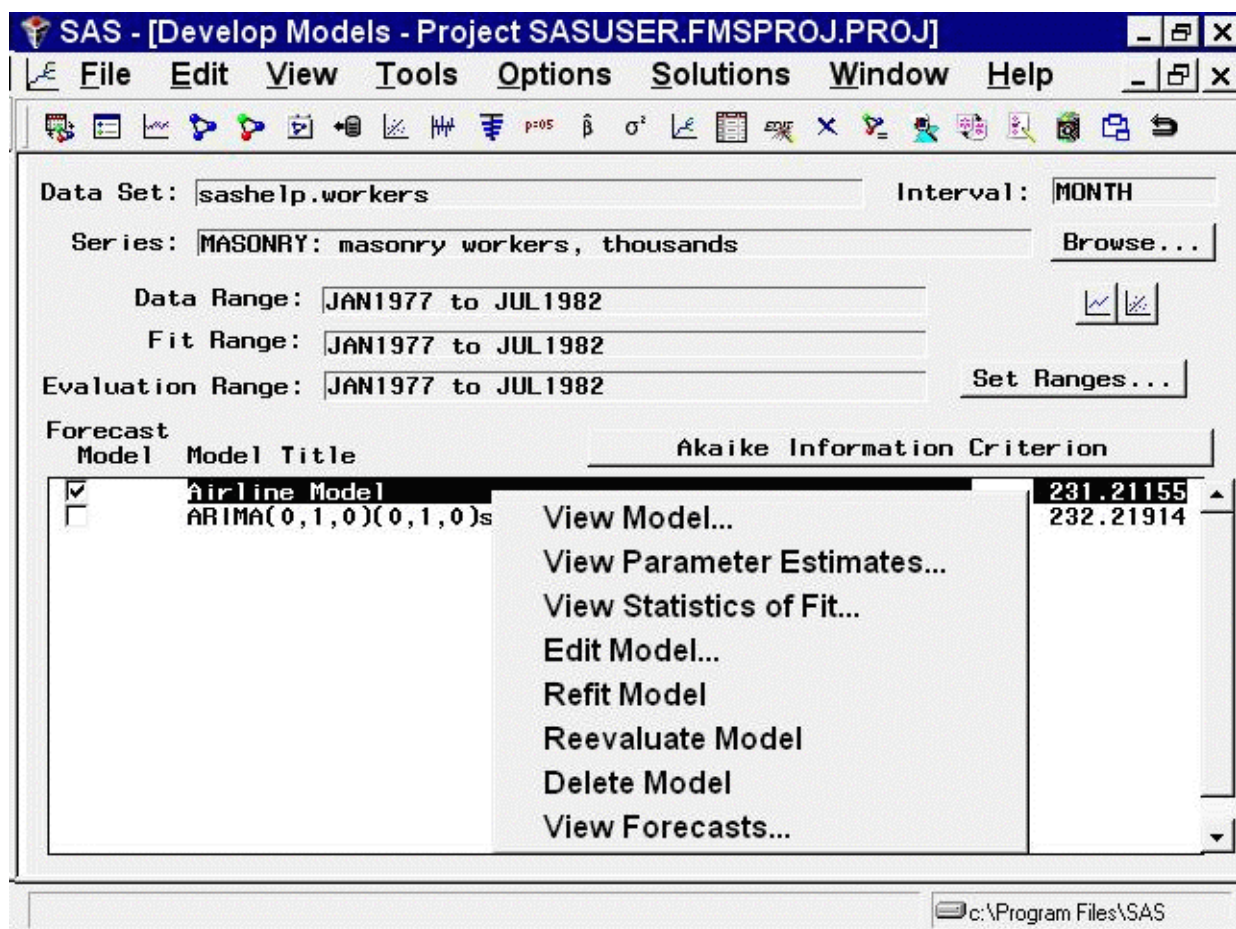
Now bring up the **Model Selection Criterion** window again and select **Akaike Information Criterion**. This statistic puts a lesser penalty on number of parameters, and the **Airline Model** comes out as the better fitting model.

Sorting and Selecting Models

Select **Sort Models** on the **Tools** menu or from the toolbar. This sorts the current list of fitted models by the current selection criterion. Although some selection criteria assign larger values to better fitting models (for example, R-square) while others assign smaller values to better fitting models, **Sort Models** always orders models with the best fitting model—in this case, the Airline Model—at the top of the list.

When you select a model in the table, its name and criterion value become highlighted, and actions that apply to that model become available. If your system supports a right mouse button, you can click it to invoke a pop-up menu, as shown in [Figure 46.13](#).

Figure 46.13 Right Mouse Button Pop-up Menu



Whether or not you have a right mouse button, the same choices are available under **Edit** and **View** from the menu bar. If the model viewer has been invoked, it is automatically updated to show the selected model, unless you have unlinked the viewer by using the **Link/Unlink** toolbar button.

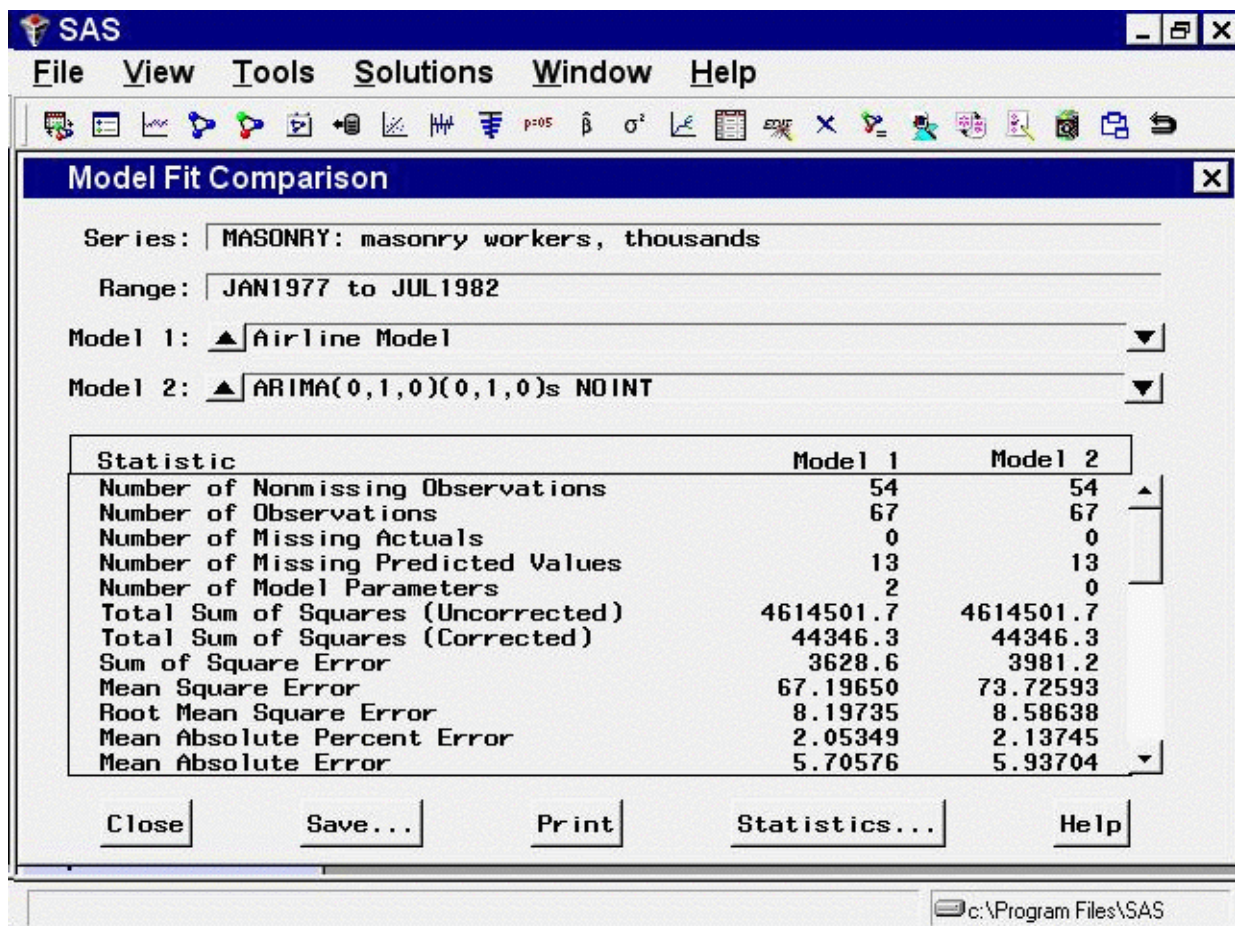
Select the highlighted model in the table again. Notice that it is no longer highlighted. When no models are highlighted, the right mouse button pop-up menu changes, and items on the menu bar that apply to a selected model become unavailable. For example, you can choose **Edit** from the menu bar, but you can't choose the **Edit Model** or **Delete Model** selections unless you have highlighted a model in the table.

When you select the check box in the `Forecast Model` column of the table, the model in that row becomes the forecasting model. This is the model that will be used the next time forecasts are generated by choosing `View Forecasts` or by using the `Produce Forecasts` window. Note that this forecasting model flag is automatically set when you use `Fit Automatic Model` or when you fit an individual model that fits better, using the current selection criterion, than the current forecasting model.

Comparing Models

Select `Tools` and `Compare Models` from the menu bar. This displays the `Model Fit Comparison` table, as shown in Figure 46.14.

Figure 46.14 Model Comparison Window



The two models you have fit are shown as `Model 1` and `Model 2`. When there are more than two models, you can bring any two of them into the table by selecting the up and down arrows. In this way, it is easy to do pairwise comparisons on any number of models, looking at as many statistics of fit as you like. Since you previously chose to display all statistics of fit, all of them are shown in the comparison table. Use the vertical scroll bar to move through the list.

After you have examined the model comparison table, select the **Close** button to return to the Develop Models window.

Controlling the Period of Evaluation and Fit

Notice the three time ranges shown on the Develop Models window (Figure 46.9). The data range shows the beginning and ending dates of the MASONRY time series. The period of fit shows the beginning and ending dates of data used to fit the models. The period of evaluation shows the beginning and ending dates of data used to compute statistics of fit. By default, the fit and evaluate ranges are the same as the data range. To change these ranges, select the **Set Ranges** button, or select **Options** and **Time Ranges** from the menu bar. This brings up the **Time Ranges Specification** window, as shown in Figure 46.15.

Figure 46.15 Time Ranges Specification Window

SAS

File View Tools Solutions Window Help

Develop Models - Project SASUSER.FMSPROJ.PROJ

Time Ranges Specification

Data Set:

Interval:

Series:

Time Ranges:

	From	To
Data Range:	<input type="text" value="JAN1977"/>	<input type="text" value="JUL1982"/>
Period of Fit:	<input type="text" value="JAN1977"/>	<input type="text" value="JUL1982"/>
Period of Evaluation:	<input type="text" value="JAN1977"/>	<input type="text" value="JUL1982"/>
Forecast Horizon:	<input type="text" value="12"/> <input type="text" value="Periods"/>	<input type="text" value="JUL1983"/>
Hold-out Sample:	<input type="text" value="0"/> <input type="text" value="Periods"/>	

c:\Program Files\SAS

For this example, suppose the early data in the series is unreliable, and you want to use the range June 1978 to the latest available for both model fitting and model evaluation. You can either type JUN1978 in the **From** column for **Period of Fit** and **Period of Evaluation**, or you can advance these dates by clicking the right pointing arrows. The outer arrow advances the date by a large amount (in this case, by a year), and the

inner arrow advances it by a single period (in this case, by a month). Once you have changed the `Period of Fit` and the `Period of Evaluation` to JUN1978 in the `From` column, select the `OK` button to return to the `Develop Models` window. Notice that these time ranges are updated at the top of the window, but the models already fit have not been affected. Your changes to the time ranges affect *subsequently fit* models.

Refitting and Reevaluating Models

If you fit the `ARIMA(0,1,0)(0,1,0)s` and `Airline` models again in the same way as before, they will be added to the model list, with the same names but with different values of the model selection criterion. Parameter estimates will be different, due to the new fit range, and statistics of fit will be different, due to the new evaluation range.

For this exercise, instead of specifying the models again, refit the existing models by selecting `Edit` from the menu bar and then selecting `Refit Models` and `All Models`. After the models have been refit, you should see the same two models listed in the table but with slightly different values for the selection criterion. The `ARIMA (0,1,0)(0,1,0)s` and `Airline` models have now been fit to the `MASONRY` series by using data from June 1978 to July 1982, since this is the period of fit you specified. The statistics of fit have been computed for the period of evaluation, which was the same as the period of fit. If you had specified a period of evaluation different from the period of fit, the statistics would have been computed accordingly.

In practice, another common reason for refitting models is the availability of new data. For example, when data for a new month become available for a monthly series, you might add them to the input data set, then invoke the forecasting system, open the project containing models fit previously, and refit the models prior to generating new forecasts. Unless you specify the period of fit and period of evaluation in the `Time Ranges Specification` window, they default to the full data range of the series found in the input data set at the time of refitting.

If you prefer to apply previously fit models to revised data without refitting, use `Reevaluate Models` instead of `Refit Models`. This recomputes the statistics of fit by using the current evaluation range, but does not re-estimate the model parameters.

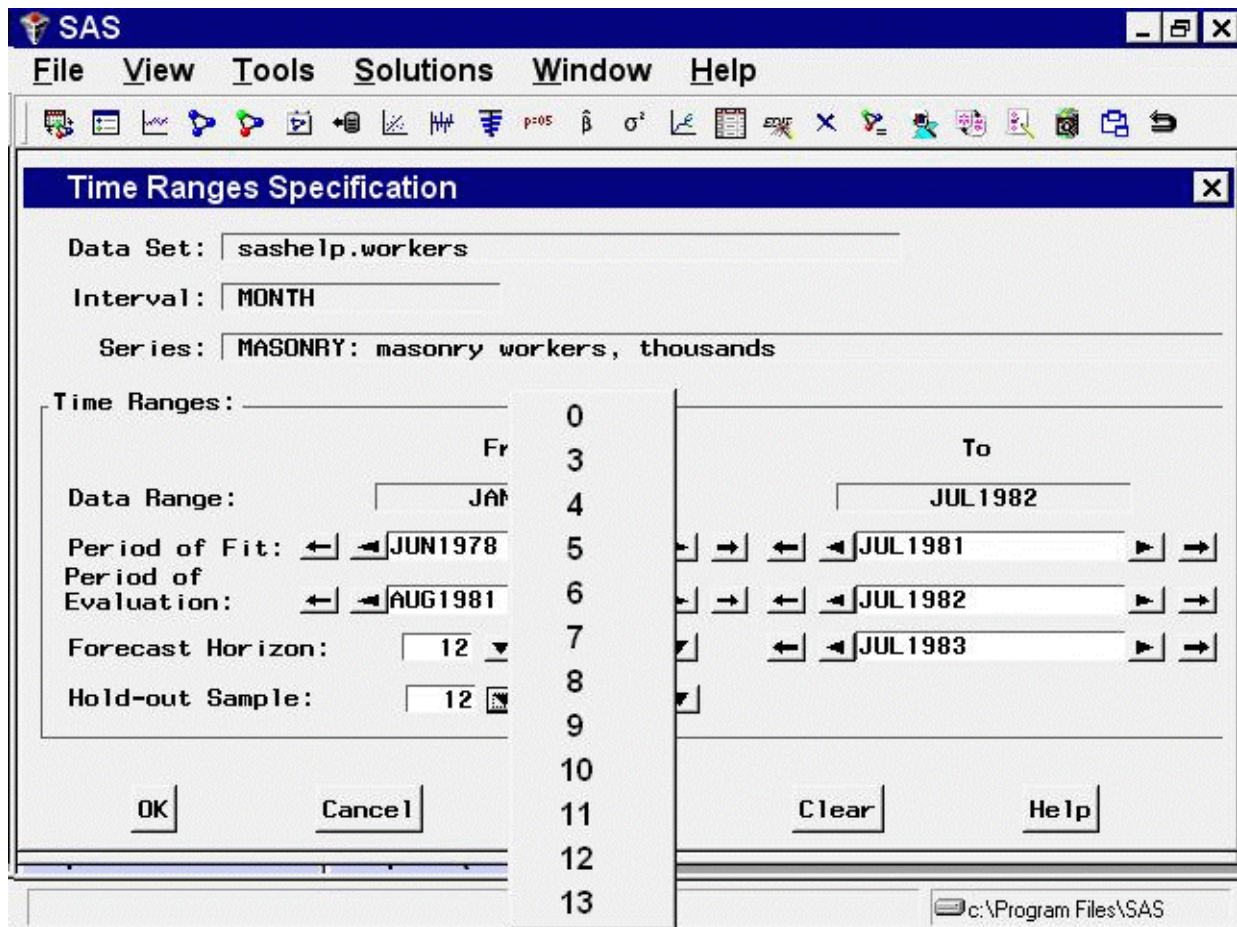
Using Hold-out Samples

One important application of model fitting where the period of fit is different from the period of evaluation is the use of hold-out samples. With this technique of model evaluation, the period of fit ends at a time point before the end of the data series, and the remainder of the data are held out as a nonoverlapping period of evaluation. With respect to the period of fit, the hold-out sample is a period in the future, used to compare the forecasting accuracy of models fit to past data.

For this exercise, use a hold-out sample of 12 months. Bring up the `Time Ranges Specification` window again by selecting the `Set Ranges` button. Set `Hold-out Sample` to 12 using the combo box, as shown in

Figure 46.16. You can also type in a value. To specify a hold-out sample period in different units, you can use the `Periods` combo box. In this case, it allows you to select years as the unit, instead of periods.

Figure 46.16 Specifying the Hold-out Sample Size

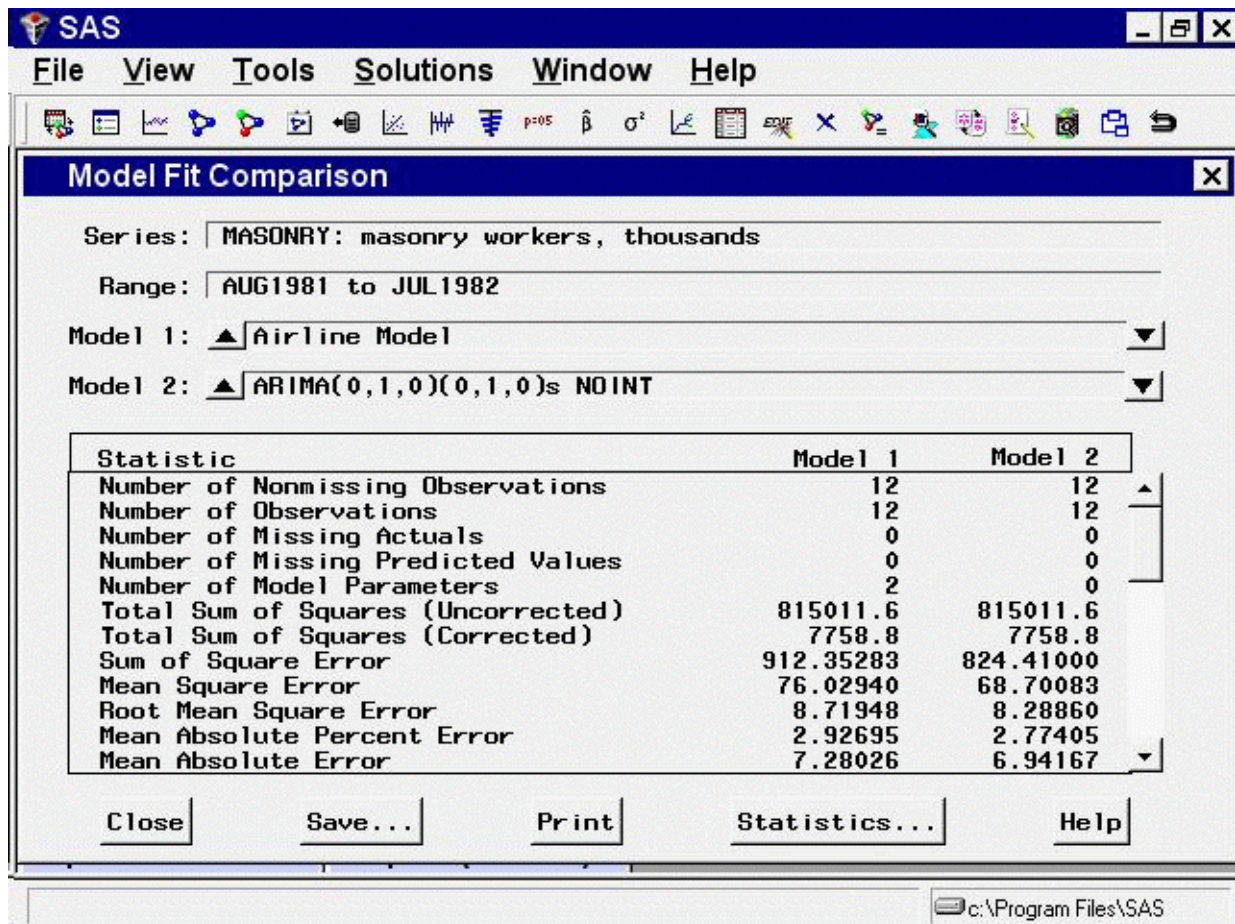


Notice that setting the hold-out sample to 12 automatically sets the fit range to JUN1978–JUL1981 and the evaluation range to AUG1981–JUL1982. If you had set the period of fit and period of evaluation to these ranges, the hold-out sample would have been automatically set to 12 periods.

Select the `OK` button to return to the `Develop Models` window. Now refit the models again. Select `Tools` and `Compare Models` to compare the models now that they have been fit to the period June 1978 through July 1981 and evaluated for the hold-out sample period August 1981 through July 1982. Note that the fit statistics for the hold-out sample are based on one-step-ahead forecasts. (See *Statistics of Fit* in Chapter 50, “Forecasting Process Details.”)

As shown in Figure 46.17, the ARIMA (0,1,0)(0,1,0)s model now seems to provide a better fit to the data than does the Airline model. It should be noted that the results can be quite different if you choose a different size hold-out sample.

Figure 46.17 Using 12 Month Hold-out Sample



Chapter 47

Using Predictor Variables

Contents

Linear Trend	2955
Time Trend Curves	2957
Regressors	2961
Adjustments	2963
Dynamic Regressor	2964
Interventions	2968
The Intervention Specification Window	2969
Specifying a Trend Change Intervention	2971
Specifying a Level Change Intervention	2973
Modeling Complex Intervention Effects	2974
Fitting the Intervention Model	2976
Limitations of Intervention Predictors	2980
Seasonal Dummies	2980
References	2984

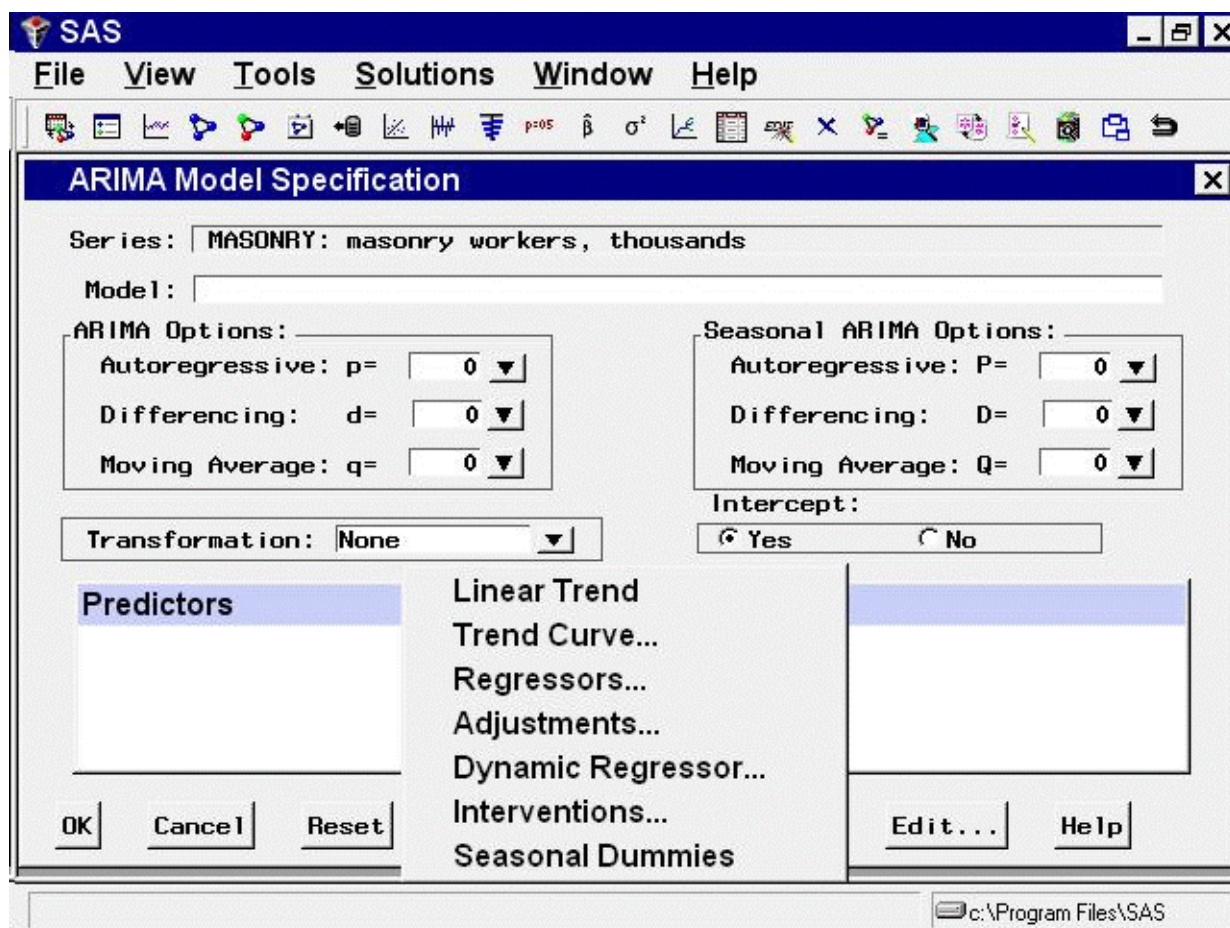
Forecasting models predict the future values of a series by using two sources of information: the past values of the series and the values of other time series variables. Other variables used to predict a series are called *predictor variables*.

Predictor variables that are used to predict the dependent series can be variables in the input data set, such as regressors and adjustment variables, or they can be special variables computed by the system as functions of time, such as trend curves, intervention variables, and seasonal dummies.

You can specify seven different types of predictors in forecasting models by using the ARIMA Model or Custom Model Specification windows. You cannot specify predictor variables with the Smoothing Model Specification window.

Figure 47.1 shows the menu of options for adding predictors to an ARIMA model that is opened by clicking the **Add** button. The Add menu for the Custom Model Specification menu is similar.

Figure 47.1 Add Predictors Menu



These types of predictors are as follows.

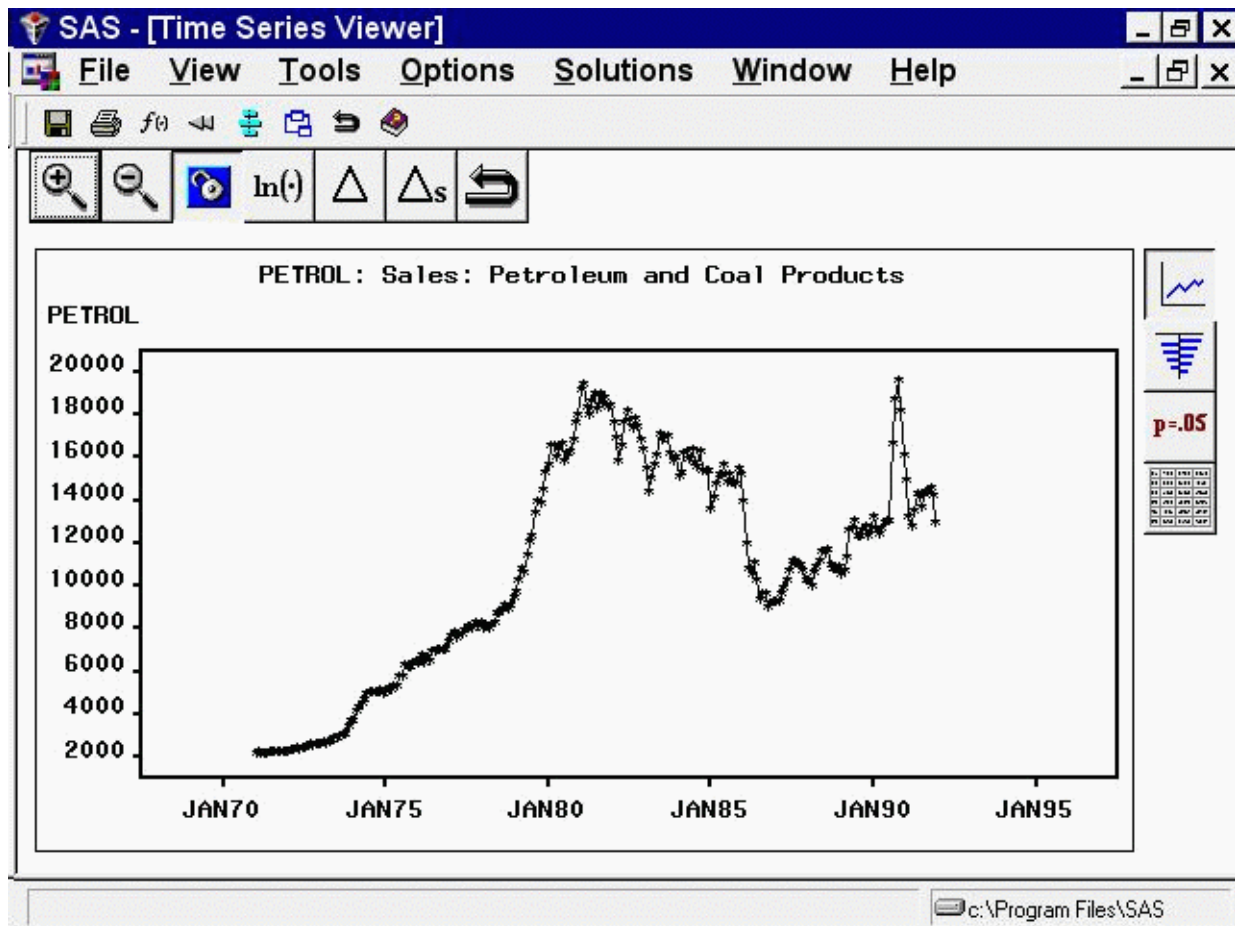
Linear Trend	adds a variable that indexes time as a predictor series. A straight line time trend is fit to the series by regression when you specify a linear trend.
Trend Curve	provides a menu of various functions of time that you can add to the model to fit nonlinear time trends. The Linear Trend option is a special case of the Trend Curve option for which the trend curve is a straight line.
Regressors	allows you to predict the series by regressing it on other variables in the data set.
Adjustments	allows you to specify other variables in the data set that supply adjustments to the forecast.
Dynamic Regressor	allows you to select a predictor variable from the input data set and specify a complex model for the way that the predictor variable affects the dependent series.
Interventions	allows you to model the effect of special events that “intervene” to change the pattern of the dependent series. Examples of intervention effects are strikes, tax increases, and special sales promotions.
Seasonal Dummies	adds seasonal indicator or “dummy” variables as regressors to model seasonal effects.

You can add any number of predictors to a forecasting model, and you can combine predictor variables with other model options.

The following sections explain these seven kinds of predictors in greater detail and provide examples of their use. The examples illustrate these different kinds of predictors by using series in the SASHELP.USECON data set.

Select the `Develop Models` button from the main window. Select the data set `SASHELP.USECON` and select the `View Series Graphically` button from the `Develop Models` window. The plot of the example series `PETROL` appears as shown in [Figure 47.2](#).

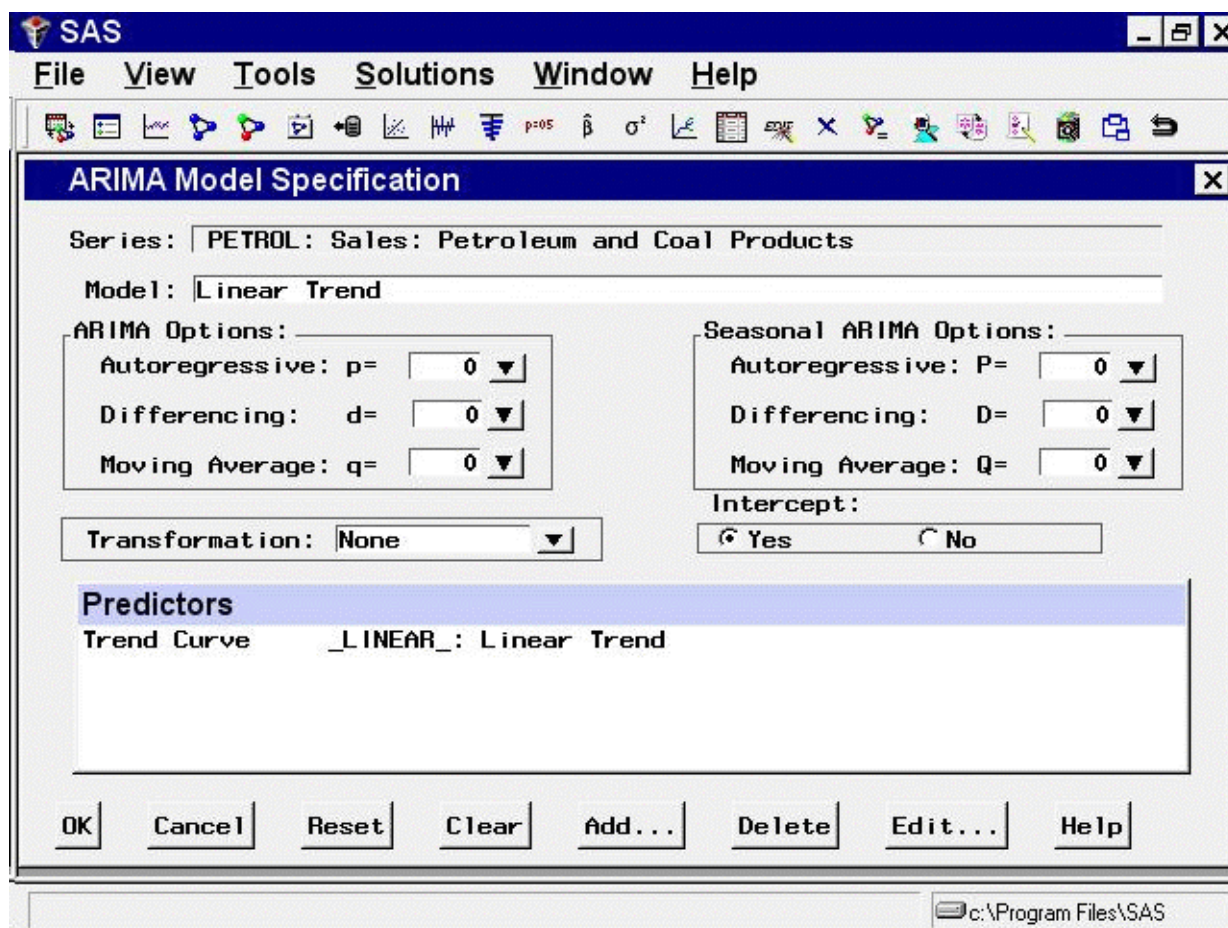
Figure 47.2 Sales of Petroleum and Coal



Linear Trend

From the `Develop Models` window, select `Fit ARIMA Model`. From the `ARIMA Model Specification` window, select `Add` and then select `Linear Trend` from the menu (shown in [Figure 47.1](#)).

A linear trend is added to the `Predictors` list, as shown in [Figure 47.3](#).

Figure 47.3 Linear Trend Predictor Specified

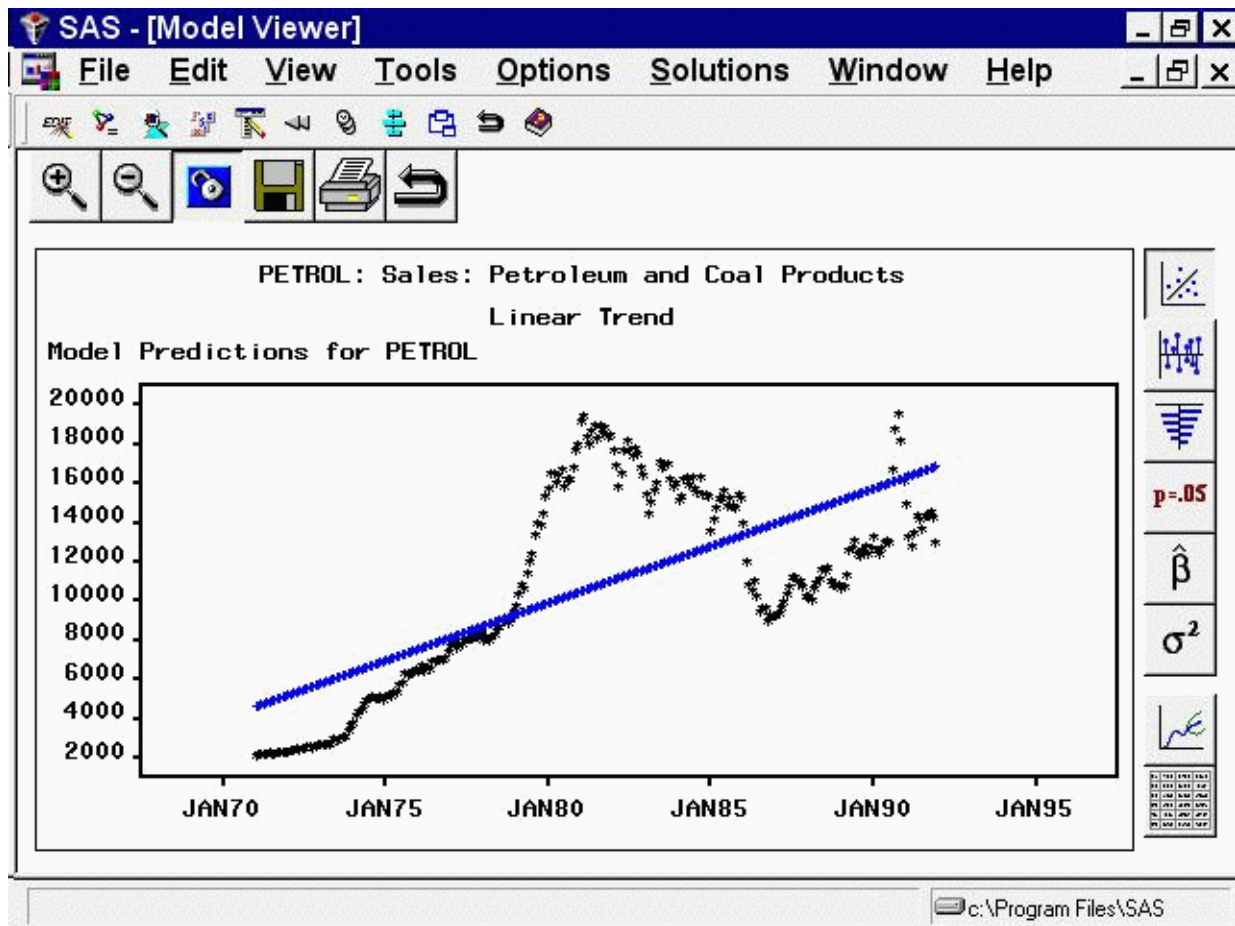
The description for the linear trend item shown in the Predictors list has the following meaning. The first part of the description, Trend Curve, describes the type of predictor. The second part, `_LINEAR_`, gives the variable name of the predictor series. In this case, the variable is a time index that the system computes. This variable is included in the output forecast data set. The final part, Linear Trend, describes the predictor.

Notice that the model you have specified consists only of the time index regressor `_LINEAR_` and an intercept. Although this window is normally used to specify ARIMA models, in this case no ARIMA model options are specified, and the model is a simple regression on time.

Select the **OK** button. The Linear Trend model is fit and added to the model list in the Develop Models window.

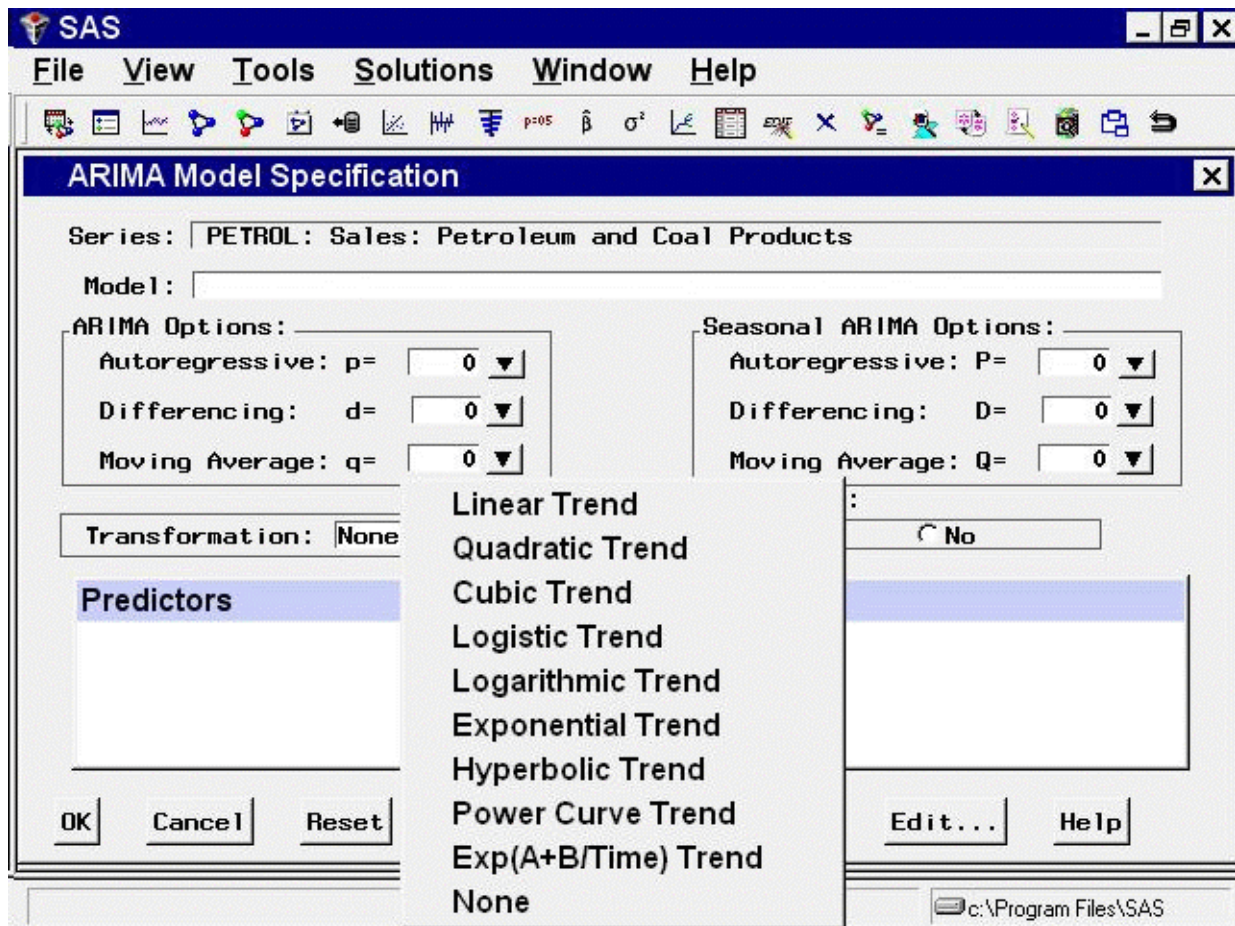
Now open the Model Viewer by using the **View Model Graphically** icon or the **Model Predictions** item under the **View** pull-down menu or toolbar. This displays a plot of the model predictions and actual series values, as shown in Figure 47.4. The predicted values lie along the least squares trend line.

Figure 47.4 Linear Trend Model



Time Trend Curves

From the Develop Models window, select **Fit ARIMA Model**. From the ARIMA Model Specification window, select **Add** and then select **Trend Curve** from the menu (shown in Figure 47.1). A menu of different kinds of trend curves is displayed, as shown in Figure 47.5.

Figure 47.5 Time Trend Curves Menu

These trend curves work in a similar way as the Linear Trend option (which is a special case of a trend curve and one of the choices on the menu), but with the Trend Curve menu you have a choice of various nonlinear time trends.

Select `Quadratic Trend`. This adds a quadratic time trend to the Predictors list, as shown in [Figure 47.6](#).

Figure 47.6 Quadratic Trend Specified

SAS

File View Tools Solutions Window Help

ARIMA Model Specification

Series: PETROL: Sales: Petroleum and Coal Products

Model: Quadratic Trend

ARIMA Options:

Autoregressive: p= 0 ▼

Differencing: d= 0 ▼

Moving Average: q= 0 ▼

Seasonal ARIMA Options:

Autoregressive: P= 0 ▼

Differencing: D= 0 ▼

Moving Average: Q= 0 ▼

Transformation: None ▼

Intercept: ☒ Yes ☐ No

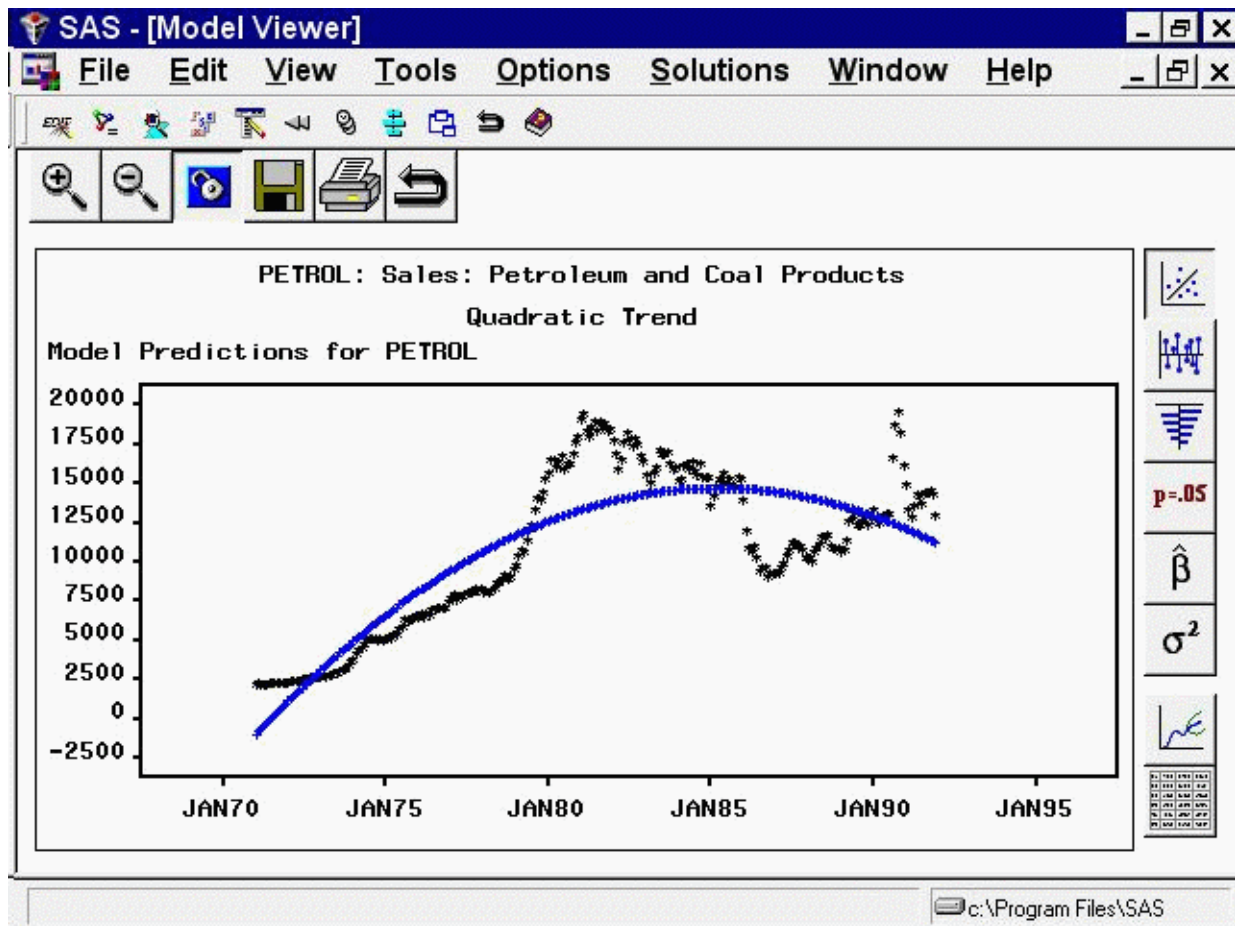
Predictors

Trend Curve _QUAD_: Quadratic Trend

OK Cancel Reset Clear Add... Delete Edit... Help

c:\Program Files\SAS

Now select the **OK** button. The quadratic trend model is fit and added to the list of models in the Develop Models window. The Model Viewer displays a plot of the quadratic trend model, as shown in [Figure 47.7](#).

Figure 47.7 Quadratic Trend Model

This curve does not fit the PETROL series very well, but the View Model plot illustrates how time trend models work. You might want to experiment with different trend models to see what the different trend curves look like.

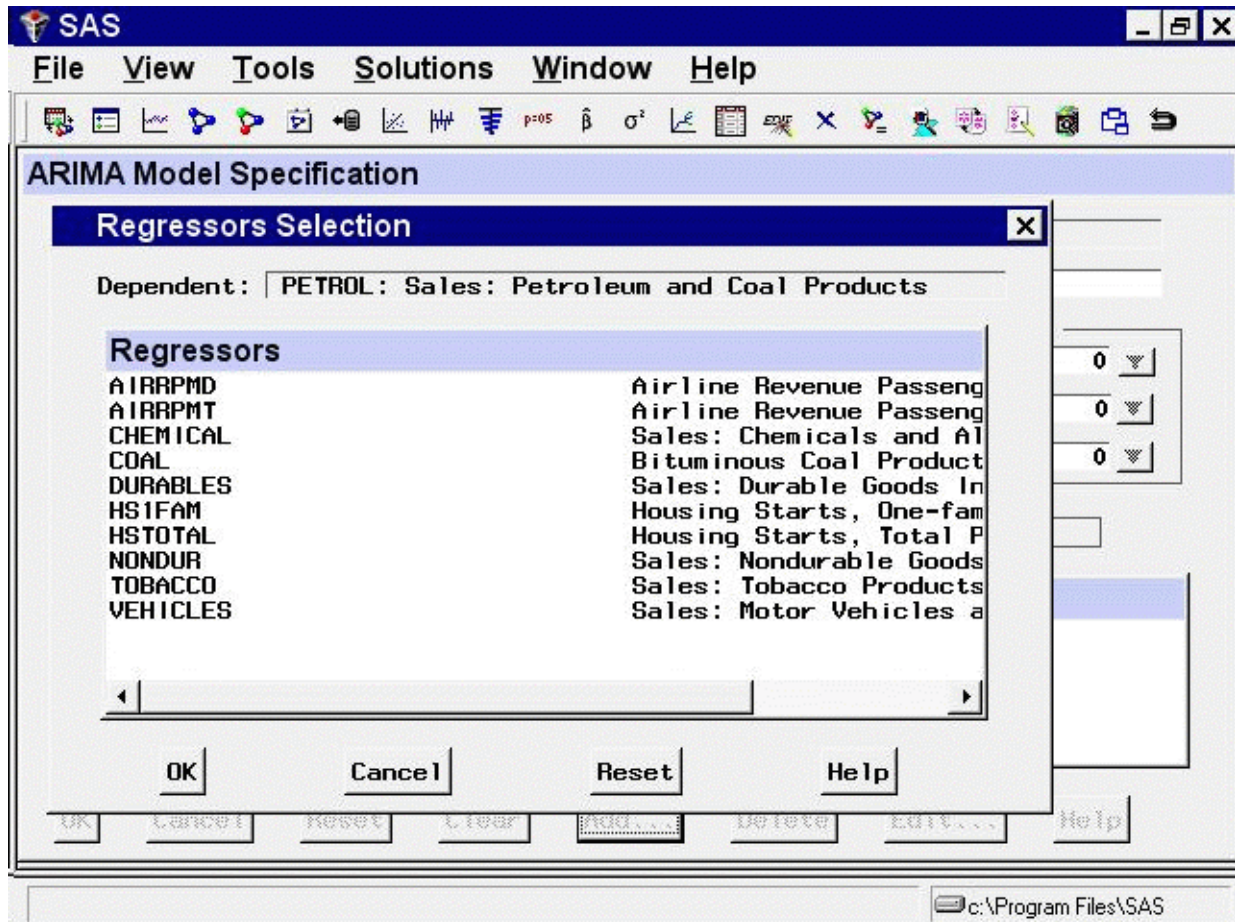
Some of the trend curves require transforming the dependent series. When you specify one of these curves, a notice is displayed reminding you that a transformation is needed, and the Transformation field is automatically filled in. Therefore, you cannot control the Transformation specification when some kinds of trend curves are specified.

See the section “[Time Trend Curves](#)” on page 2957 in Chapter 50, “[Forecasting Process Details](#),” for more information about the different trend curves.

Regressors

From the Develop Models window, select **Fit ARIMA Model**. From the ARIMA Model Specification window, select **Add** and then select **Regressors** from the menu (shown in Figure 47.1). This displays the **Regressors Selection** window, as shown in Figure 47.8. This window allows you to select any number of other series in the input data set as regressors to predict the dependent series.

Figure 47.8 Regressors Selection Window



For this example, select **CHEMICAL**, **Sales: Chemicals and Allied Products**, and **VEHICLES**, **Sales: Motor Vehicles and Parts**. (Note: You do not need to use the CTRL key when selecting more than one regressor.) Then select the **OK** button. The two variables you selected are added to the **Predictors** list as regressor type predictors, as shown in Figure 47.9.

Figure 47.9 Regressors Selected

SAS

File View Tools Solutions Window Help

ARIMA Model Specification

Series: PETROL: Sales: Petroleum and Coal Products

Model: CHEMICAL + VEHICLES

ARIMA Options:

Autoregressive: p= 0

Differencing: d= 0

Moving Average: q= 0

Seasonal ARIMA Options:

Autoregressive: P= 0

Differencing: D= 0

Moving Average: Q= 0

Transformation: None

Intercept: ☒ Yes ☐ No

Predictors

Regressor	CHEMICAL: Sales: Chemicals and Allied Products
Regressor	VEHICLES: Sales: Motor Vehicles and Parts

OK Cancel Reset Clear Add... Delete Edit... Help

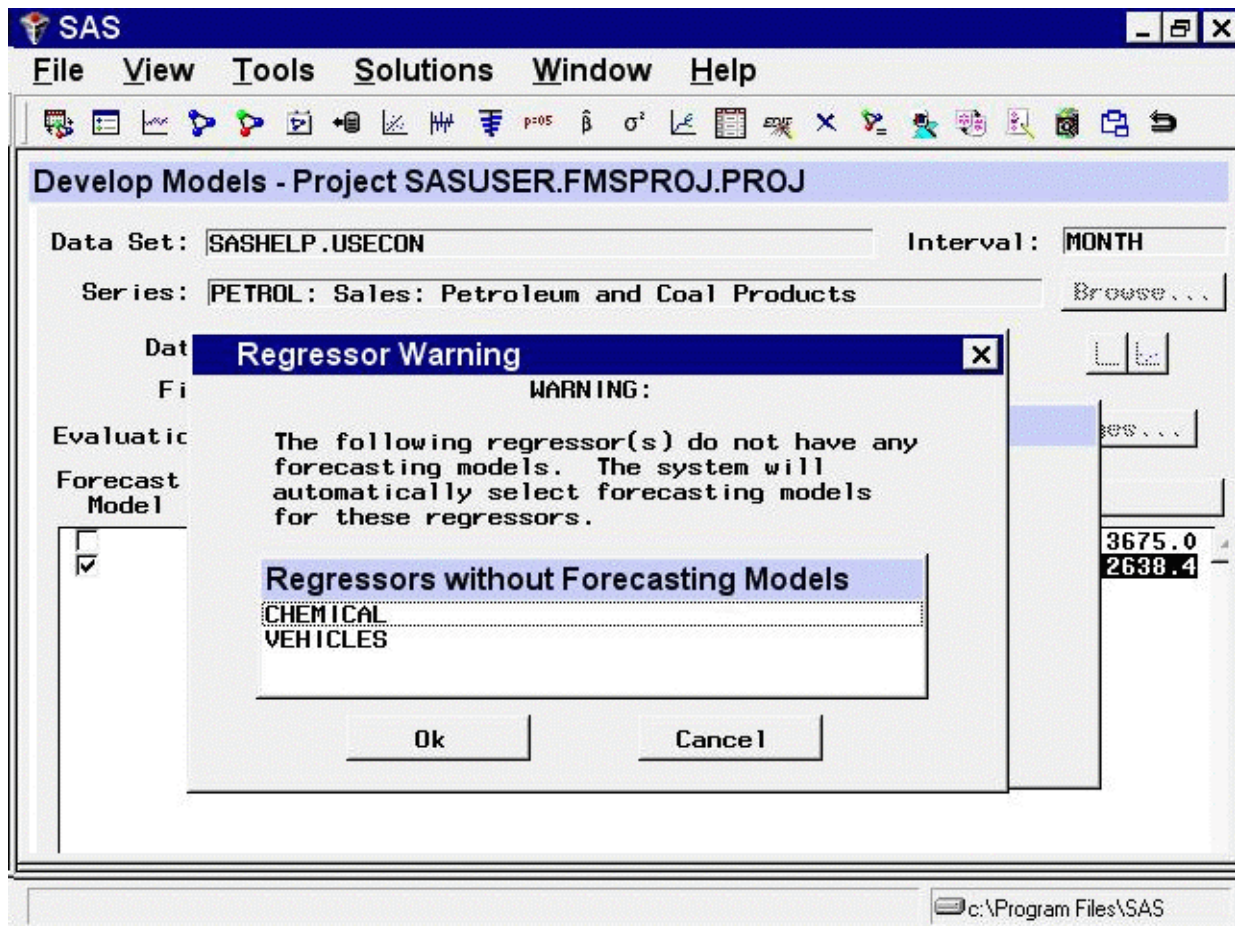
c:\Program Files\SAS

You must have forecasts of the future values of the regressor variables in order to use them as predictors. To do this, you can specify a forecasting model for each regressor, have the system automatically select forecasting models for the regressors, or supply predicted future values for the regressors in the input data set.

Even if you have supplied future values for a regressor variable, the system requires a forecasting model for the regressor. Future values that you supply in the input data set take precedence over predicted values from the regressor's forecasting model when the system computes the forecasts for the dependent series.

Select the **OK** button. The system starts to fit the regression model but then stops and displays a warning that the regressors that you selected do not have forecasting models, as shown in [Figure 47.10](#).

Figure 47.10 Regressors Needing Models Warning



If you want the system to create forecasting models automatically for the regressor variables by using the automatic model selection process, select the **OK** button. If not, you can select the **Cancel** button to abort fitting the regression model.

For this example, select the **OK** button. The system now performs the automatic model selection process for **CHEMICAL** and **VEHICLES**. The selected forecasting models for **CHEMICAL** and **VEHICLES** are added to the model lists for those series. If you switch the current time series in the **Develop Models** window to **CHEMICAL** or **VEHICLES**, you will see the model that the system selected for that series.

Once forecasting models have been fit for all regressors, the system proceeds to fit the regression model for **PETROL**. The fitted regression model is added to the model list displayed in the **Develop Models** window.

Adjustments

An *adjustment* predictor is a variable in the input data set that is used to adjust the forecast values produced by the forecasting model. Unlike a regressor, an adjustment variable does not have a regression coefficient.

No model fitting is performed for adjustments. Nonmissing values of the adjustment series are simply added to the model prediction for the corresponding period. Missing adjustment values are ignored. If you supply adjustment values for observations within the period of fit, the adjustment values are subtracted from the actual values, and the model is fit to these adjusted values.

To add adjustments, select **Add** and then select **Adjustments** from the pop-up menu (shown in [Figure 47.1](#)). This displays the **Adjustments Selection** window. The **Adjustments Selection** window functions the same as the **Regressor Selection** window (which is shown in [Figure 47.8](#)). You can select any number of adjustment variables as predictors.

Unlike regressors, adjustments do not require forecasting models for the adjustment variables. If a variable that is used as an adjustment does have a forecasting model fit to it, the adjustment variable's forecasting model is ignored when the variable is used as an adjustment.

You can use forecast adjustments to account for expected future events that have no precedent in the past and so cannot be modeled by regression. For example, suppose you are trying to forecast the sales of a product, and you know that a special promotional campaign for the product is planned during part of the period you want to forecast. If such sales promotion programs have been frequent in the past, then you can record the past and expected future level of promotional efforts in a variable in the data set and use that variable as a regressor in the forecasting model.

However, if this is the first sales promotion of its kind for this product, you have no way to estimate the effect of the promotion from past data. In this case, the best you can do is to make an educated guess at the effect the promotion will have and add that guess to what your forecasting model would predict in the absence of the special sales campaign.

Adjustments are also useful for making judgmental alterations to forecasts. For example, suppose you have produced forecast sales data for the next 12 months. Your supervisor believes that the forecasts are too optimistic near the end and asks you to prepare a forecast graph in which the numbers that you have forecast are reduced by 1000 in the last three months. You can accomplish this task by editing the input data set so that it contains observations for the actual data range of sales plus 12 additional observations for the forecast period, and a new variable called, for example, **ADJUSTMENT**. The variable **ADJUSTMENT** contains the value 1000 for the last three observations and is missing for all other observations. You fit the same model previously selected for forecasting by using the **ARIMA Model Specification** or **Custom Model Specification** window, but with an adjustment added that uses the variable **ADJUSTMENT**. Now when you graph the forecasts by using the **Model Viewer**, the last three periods of the forecast are reduced by 1000. The confidence limits are unchanged, which helps draw attention to the fact that the adjustments to the forecast deviate from what would be expected statistically.

Dynamic Regressor

Selecting **Dynamic Regressor** from the **Add Predictors** menu (shown in [Figure 47.1](#)) allows you to specify a complex time series model of the way that a predictor variable influences the series that you are forecasting.

When you specify a predictor variable as a simple regressor, only the current period value of the predictor effects the forecast for the period. By specifying the predictor with the **Dynamic Regression** option, you can use past values of the predictor series, and you can model effects that take place gradually.

Dynamic regression models are an advanced feature that you are unlikely to find useful unless you have studied the theory of statistical time series analysis. You might want to skip this section if you are not trained in time series modeling.

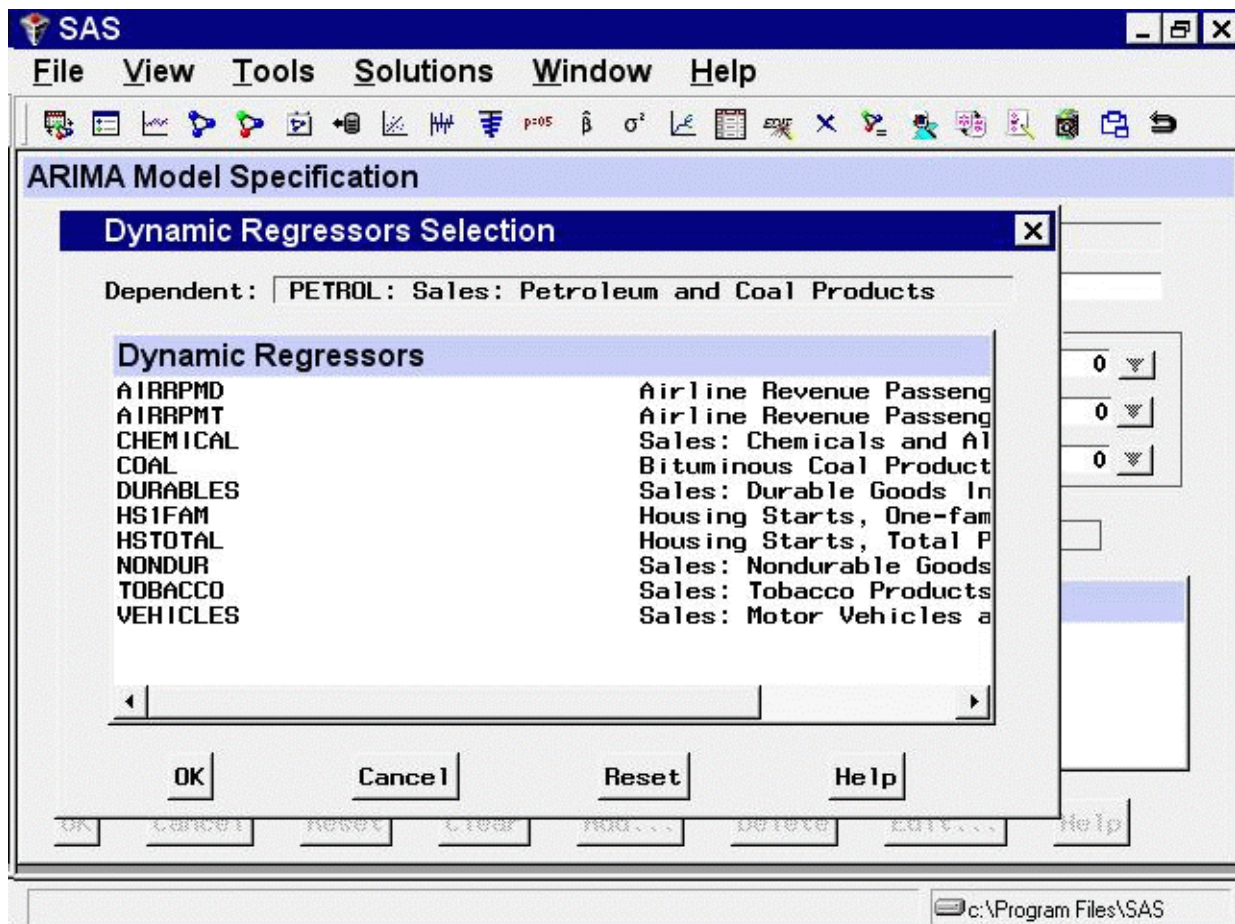
The term *dynamic regression* was introduced by Pankratz (1991) and refers to what Box and Jenkins (1976) named *transfer function models*. In dynamic regression, you have a time series model, similar to an ARIMA model, that predicts how changes in the predictor series affect the dependent series over time.

The dynamic regression model relates the predictor variable to the expected value of the dependent series in the same way that an ARIMA model relates the fluctuations of the dependent series about its conditional mean to the random error term (which is also called the innovation series). Refer to Pankratz (1991) and Box and Jenkins (1976) for more information about dynamic regression or transfer function models. See also Chapter 7, “[The ARIMA Procedure](#).”

From the Develop Models window, select **Fit ARIMA Model**. From the ARIMA Model Specification window, select **Add** and then select **Linear Trend** from the menu (shown in [Figure 47.1](#)).

Now select **Add** and select **Dynamic Regressor**. This displays the **Dynamic Regressors Selection** window, as shown in [Figure 47.11](#).

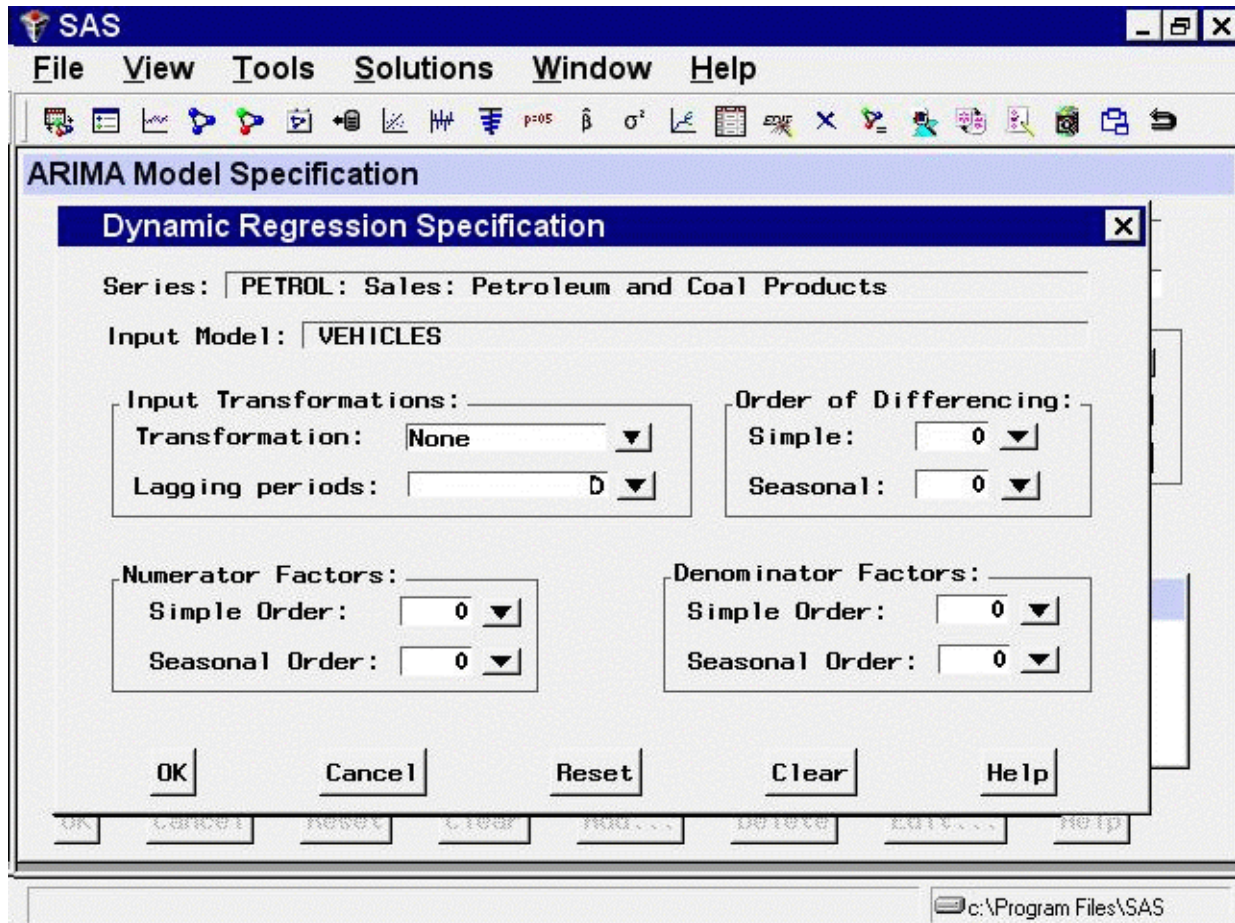
Figure 47.11 Dynamic Regressors Selection Window



You can select only one predictor series when specifying a dynamic regression model. For this example, select `VEHICLES`, Sales: Motor Vehicles and Parts. Then select the `OK` button.

This displays the `Dynamic Regression Specification` window, as shown in [Figure 47.12](#).

Figure 47.12 Dynamic Regression Specification Window



This window consists of four parts. The `Input Transformations` fields enable you to transform or lag the predictor variable. For example, you might use the lagged logarithm of the variable as the predictor series.

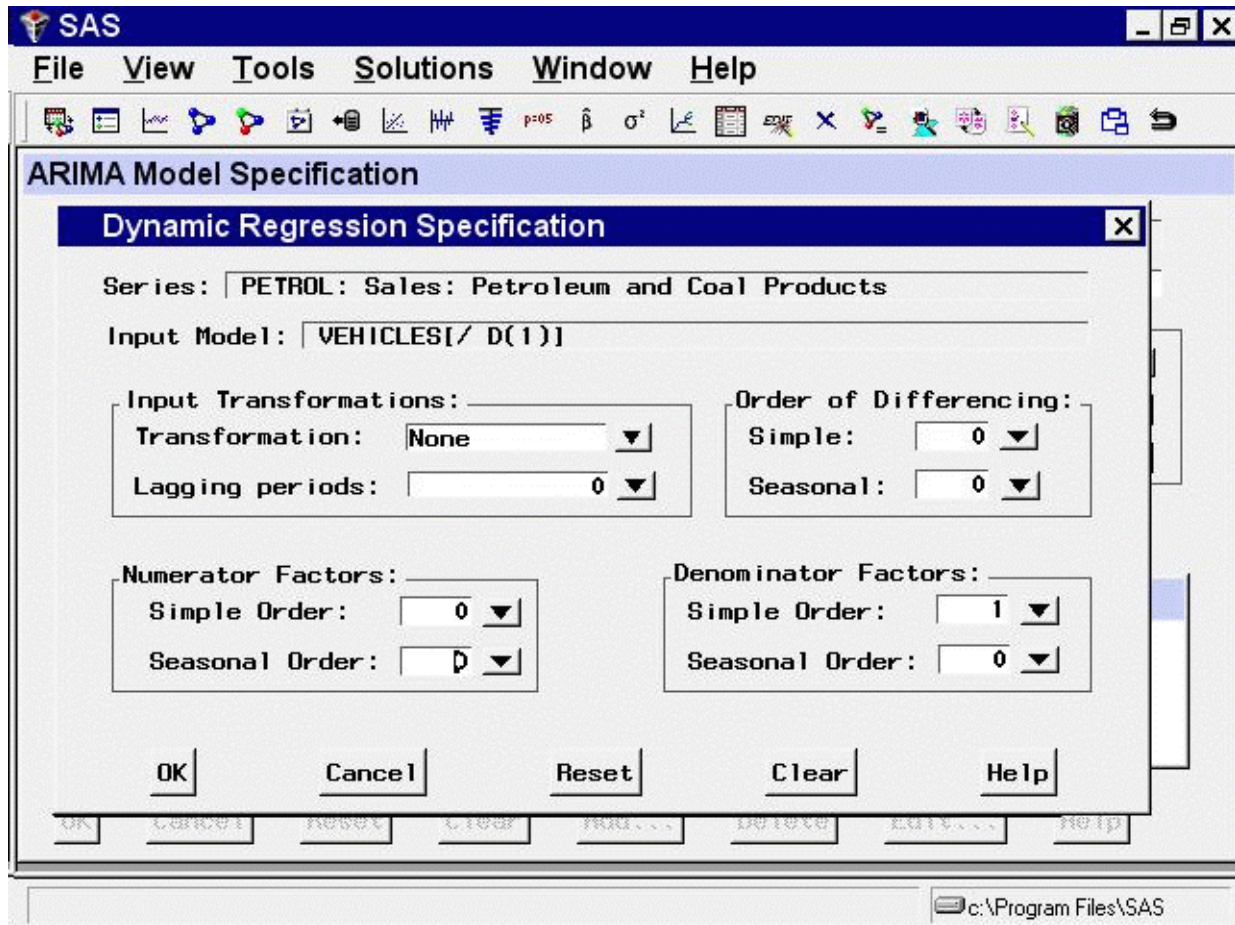
The `Order of Differencing` fields enable you to specify simple and seasonal differencing of the predictor series. For example, you might use changes in the predictor variable instead of the variable itself as the predictor series.

The `Numerator Factors` and `Denominator Factors` fields enable you to specify the orders of simple and seasonal numerator and denominator factors of the transfer function.

Simple regression is a special case of dynamic regression in which the dynamic regression model consists of only a single regression coefficient for the current value of the predictor series. If you select the `OK` button without specifying any options in the `Dynamic Regression Specification` window, a simple regressor will be added to the model.

For this example, use the `Simple Order` combo box for `Denominator Factors` and set its value to 1. The window now appears as shown in Figure 47.13.

Figure 47.13 Distributed Lag Regression Specified



This model is equivalent to regression on an exponentially weighted infinite distributed lag of `VEHICLES` (in the same way an `MA(1)` model is equivalent to single exponential smoothing).

Select the `OK` button to add the dynamic regressor to the model predictors list.

In the ARIMA Model Specification window, the Predictors list should now contain two items, a linear trend and a dynamic regressor for `VEHICLES`, as shown in Figure 47.14.

Figure 47.14 Dynamic Regression Model

SAS

File View Tools Solutions Window Help

ARIMA Model Specification

Series: PETROL: Sales: Petroleum and Coal Products

Model: Linear Trend + VEHICLES[/ D(1)]

ARIMA Options:

Autoregressive: p= 0 ▼

Differencing: d= 0 ▼

Moving Average: q= 0 ▼

Seasonal ARIMA Options:

Autoregressive: P= 0 ▼

Differencing: D= 0 ▼

Moving Average: Q= 0 ▼

Transformation: None ▼

Intercept: ☒ Yes ☐ No

Predictors

Trend Curve	LINEAR : Linear Trend
Dynamic Reg.	VEHICLES: VEHICLES[/ D(1)]

OK Cancel Reset Clear Add... Delete Edit... Help

c:\Program Files\SAS

This model is a multiple regression of PETROL on a time trend variable and an infinite distributed lag of VEHICLES. Select the **OK** button to fit the model.

As with simple regressors, if VEHICLES does not already have a forecasting model, an automatic model selection process is performed to find a forecasting model for VEHICLES before the dynamic regression model for PETROL is fit.

Interventions

An *intervention* is a special indicator variable, computed automatically by the system, that identifies time periods affected by unusual events that influence or intervene in the normal path of the time series you are forecasting. When you add an intervention predictor, the indicator variable of the intervention is used as a regressor, and the impact of the intervention event is estimated by regression analysis.

To add an intervention to the Predictors list, you must use the Intervention Specification window to specify the time or times that the intervening event took place and to specify the type of intervention. You can add

interventions either through the `Interventions` item of the `Add` action or by selecting `Tools` from the menu bar and then selecting `Define Interventions`.

Intervention specifications are associated with the series. You can specify any number of interventions for each series, and once you define interventions you can select them for inclusion in forecasting models. If you select the `Include Interventions` option in the `Options` menu, any interventions that you have previously specified for a series are automatically added as predictors to forecasting models for the series.

From the `Develop Models` window, invoke the series viewer by selecting the `View Series Graphically` icon or `Series` under the `View` menu. This displays the `Time Series Viewer`, as was shown in [Figure 47.2](#).

Note that the trend in the `PETROL` series shows several clear changes in direction. The upward trend in the first part of the series reverses in 1981. There is a sharp drop in the series towards the end of 1985, after which the trend is again upwardly sloped. Finally, in 1991 the series takes a sharp upward excursion but quickly returns to the trend line.

You might have no idea what events caused these changes in the trend of the series, but you can use these patterns to illustrate the use of intervention predictors. To do this, you fit a linear trend model to the series, but modify that trend line by adding intervention effects to model the changes in trend you observe in the series plot.

The Intervention Specification Window

From the `Develop Models` window, select `Fit ARIMA` model. From the `ARIMA Model Specification` window, select `Add` and then select `Linear Trend` from the menu (shown in [Figure 47.1](#)).

Select `Add` again and then select `Interventions`. If you have any interventions already defined for the series, this selection displays the `Interventions for Series` window. However, since you have not previously defined any interventions, this list is empty. Therefore, the system assumes that you want to add an intervention and displays the `Intervention Specification` window instead, as shown in [Figure 47.15](#).

Figure 47.15 Interventions Specification Window

Intervention Specification

Series: PETROL: Sales: Petroleum and Coal Products

Label:

Intervention Specification:

Date: .

Type of Intervention:

☒ Point ☐ Step ☐ Ramp

Effect Time Window:

Number of lags: 0

Effect Decay Pattern:

☒ None ☐ Exp ☐ Wave

DATE	PETROL
JAN71	2154.0000
FEB71	2250.0000
MAR71	2165.0000
APR71	2223.0000
MAY71	2190.0000
JUN71	2288.0000
JUL71	2250.0000
AUG71	2251.0000
SEP71	2281.0000
OCT71	2320.0000
NOV71	2295.0000

OK Cancel Reset Clear Help

c:\Program Files\SAS

The top of the Intervention Specification window shows the current series and the label for the new intervention (initially blank). At the right side of the window is a scrollable table showing the values of the series. This table helps you locate the dates of the events you want to model.

At the left of the window is an area titled *Intervention Specification* that contains the options for defining the intervention predictor. The *Date* field specifies the time that the intervention occurs. You can type a date value in the *Date* field, or you can set the *Date* value by selecting a row from the table of series values at the right side of the window.

The area titled *Type of Intervention* controls the kind of indicator variable constructed to model the intervention effect. You can specify the following kinds of interventions:

- Point** is used to indicate an event that occurs in a single time period. An example of a point event is a strike that shuts down production for part of a time period. The value of the intervention's indicator variable is zero except for the date specified.
- Step** is used to indicate a continuing event that changes the level of the series. An example of a step event is a change in the law, such as a tax rate increase. The value of the intervention's indicator variable is zero before the date specified and 1 thereafter.
- Ramp** is used to indicate a continuing event that changes the trend of the series. The value

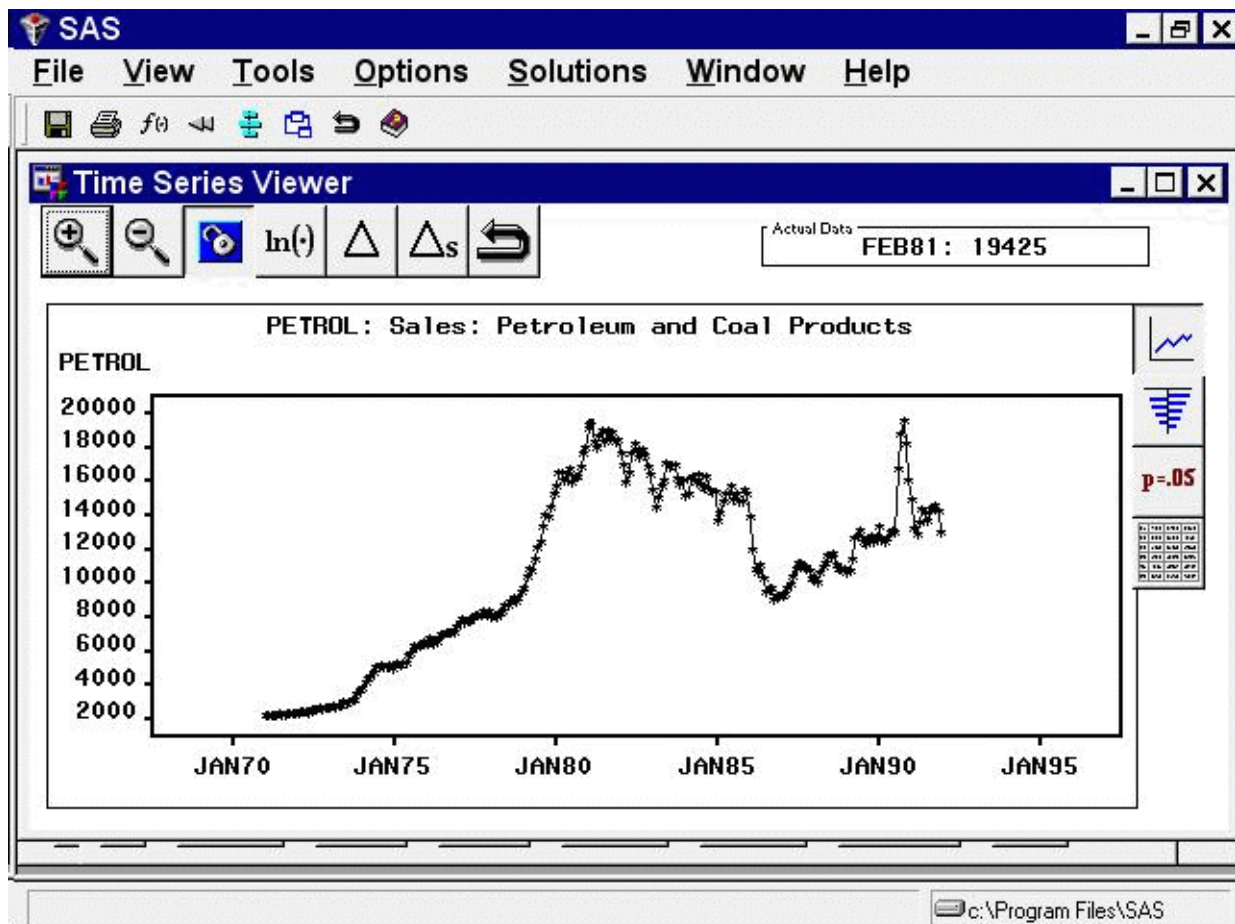
of the intervention's indicator variable is zero before the date specified, and it increases linearly with time thereafter.

The areas titled `Effect Time Window` and `Effect Decay Pattern` specify how to model the effect that the intervention has on the dependent series. These options are not used for simple interventions, they will be discussed later in this chapter.

Specifying a Trend Change Intervention

In the Time Series Viewer window position the mouse over the highest point in 1981 and select the point. This displays the data value, 19425, and date, February 1981, of that point in the upper-right corner of the Time Series Viewer, as shown in [Figure 47.16](#).

Figure 47.16 Identifying the Turning Point



Now that you know the date that the trend reversal occurred, enter that date in the `Date` field of the Intervention Specification window. Select `Ramp` as the type of intervention. The window should now appear as shown in [Figure 47.17](#).

Figure 47.17 Ramp Intervention Specified

SAS

File View Tools Solutions Window Help

Intervention Specification

Series: PETROL: Sales: Petroleum and Coal Products

Label: Ramp:FEB1981

Intervention Specification:

Date: FEB1981

Type of Intervention:

☐ Point ☐ Step ☒ Ramp

Effect Time Window:

Number of lags: 0

Effect Decay Pattern:

☒ None ☐ Exp ☐ Wave

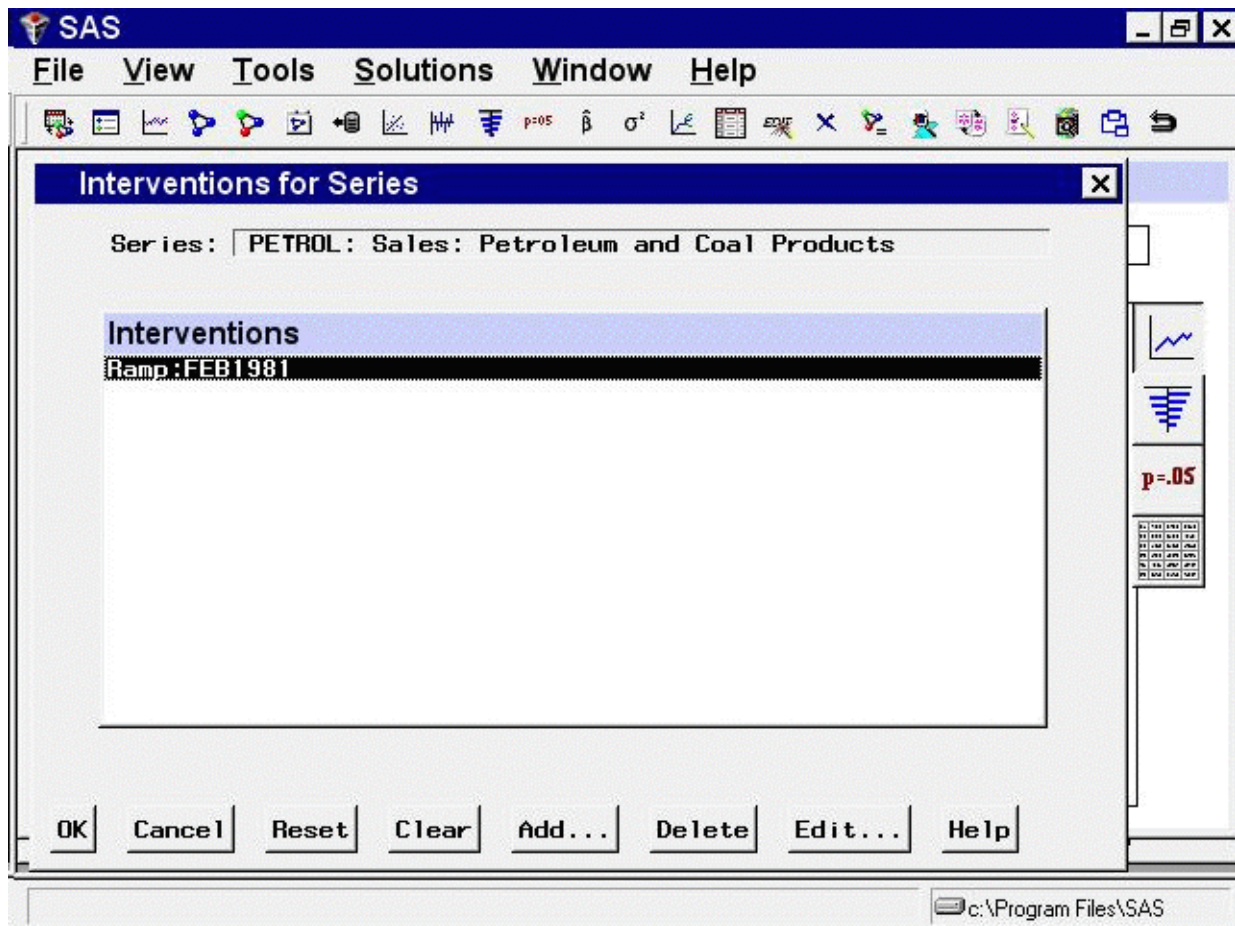
DATE	PETROL
FEB81	19425
MAR81	18351
APR81	18024
MAY81	18629
JUN81	19015
JUL81	18306
AUG81	18988
SEP81	18577
OCT81	18853
NOV81	18366
DEC81	19470

OK Cancel Reset Clear Help

c:\Program Files\SAS

Select the **OK** button. This adds the intervention to the list of interventions for the **PETROL** series, and returns you to the **Interventions for Series** window, as shown in Figure 47.18.

Figure 47.18 Interventions for Series Window



This window allows you to select interventions for inclusion in the forecasting model. Since you need to define other interventions, select the **Add** button. This returns you to the Intervention Specification window (shown in Figure 47.15).

Specifying a Level Change Intervention

Now add an intervention to account for the drop in the series in late 1985. You can locate the date of this event by selecting points in the Time Series Viewer plot or by scrolling through the data values table in the Interventions Specification window. Use the latter method so that you can see how this works.

Scrolling through the table, you see that the drop was from 15262 in December 1985, to 13937 in January 1986, to 12002 in February, to 10834 in March. Since the drop took place over several periods, you could use another ramp type intervention. However, this example represents the drop as a sudden event by using a step intervention and uses February 1986 as the approximate time of the drop.

Select the table row for February 1986 to set the **Date** field. Select **Step** as the intervention type. The window should now appear as shown in Figure 47.19.

Figure 47.19 Step Intervention Specified

Intervention Specification

Series: PETROL: Sales: Petroleum and Coal Products

Label: Step:FEB1986

Intervention Specification:

Date: FEB1986

Type of Intervention:

☐ Point ☒ Step ☐ Ramp

Effect Time Window:

Number of lags: 0

Effect Decay Pattern:

☒ None ☐ Exp ☐ Wave

DATE	PETROL
SEP85	14825
OCT85	14776
NOV85	15449
DEC85	15262
JAN86	13937
FEB86	12002
MAR86	10834
APR86	10568
MAY86	11049
JUN86	10246
JUL86	9412.0000

OK Cancel Reset Clear Help

c:\Program Files\SAS

Select the **OK** button to add this intervention to the list for the series.

Since the trend reverses again after the drop, add a ramp intervention for the same date as the step intervention. Select **Add** from the Interventions for Series window. Enter FEB86 in the *Date* field, select **Ramp**, and then select the **OK** button.

Modeling Complex Intervention Effects

You have now defined three interventions to model the changes in trend and level. The excursion near the end of the series remains to be dealt with.

Select **Add** from the Interventions for Series window. Scroll through the data values and select the date on which the excursion began, August 1990. Leave the intervention type as **Point**.

The pattern of the series from August 1990 through January 1991 is more complex than a simple shift in level or trend. For this pattern, you need a complex intervention model for an event that causes a sharp rise followed by a rapid return to the previous trend line. To specify this model, use the *Effect Time Window* and *Effect Decay Rate* options.

The `Effect Time Window` option controls the number of lags of the intervention's indicator variable used to model the effect of the intervention on the dependent series. For a simple intervention, the number of lags is zero, which means that the effect of the intervention is modeled by fitting a single regression coefficient to the intervention's indicator variable.

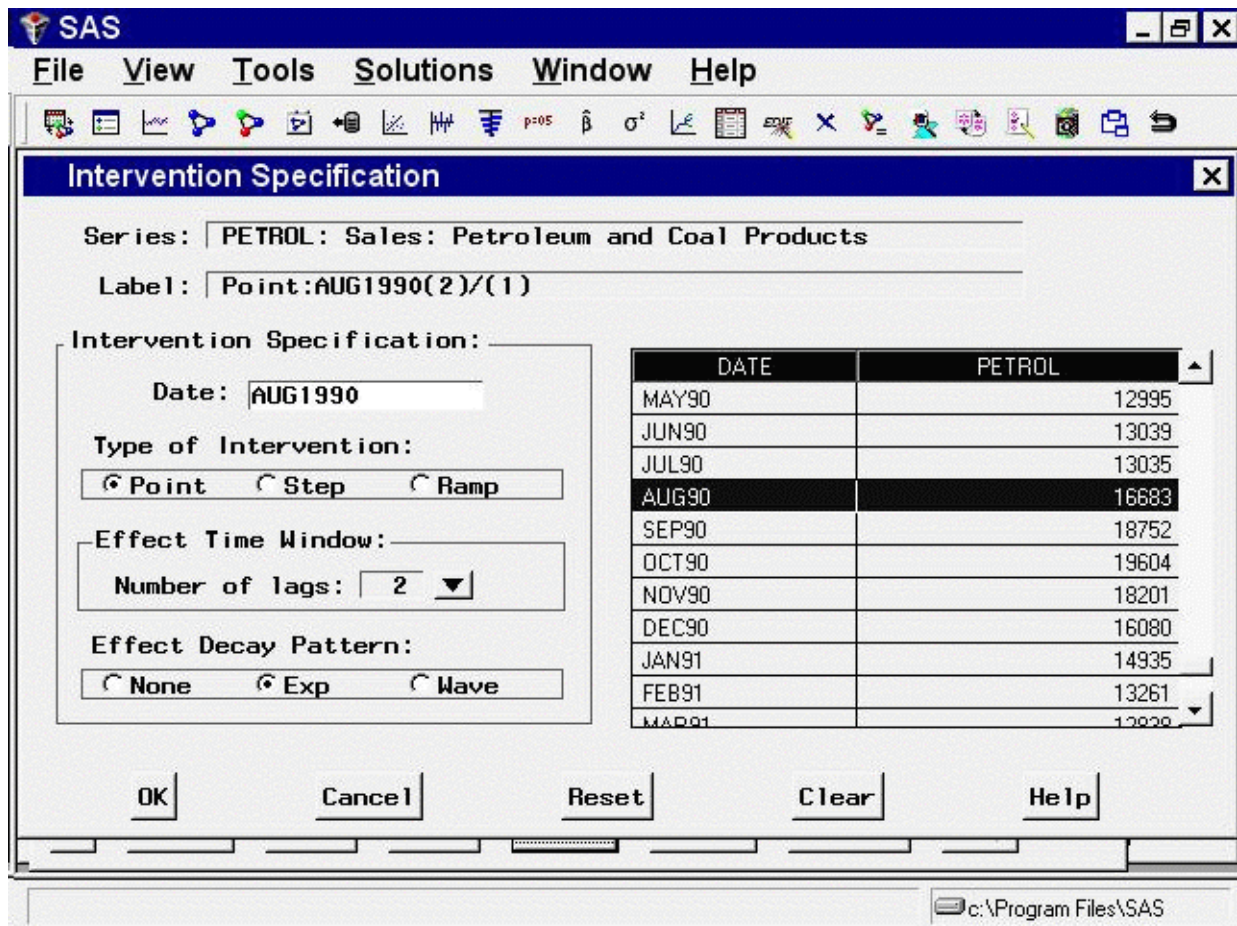
When you set the number of lags greater than zero, regression coefficients are fit to lags of the indicator variable. This allows you to model interventions whose effects take place gradually, or to model rebound effects. For example, severe weather might reduce production during one period but cause an increase in production in the following period as producers struggle to catch up. You could model this by using a point intervention with an effect time window of 1 lag. This would fit two coefficients for the intervention, one for the immediate effect and one for the delayed effect.

The `Effect Decay Pattern` option controls how the effect of the intervention dissipates over time. `None` specifies that there is no gradual decay: for point interventions, the effect ends immediately; for step and ramp interventions, the effect continues indefinitely. `Exp` specifies that the effect declines at an exponential rate. `Wave` specifies that the effect declines like an exponentially damped sine wave (or as the sum of two exponentials, depending on the fit to the data).

If you are familiar with time series analysis, these options might be clearer if you note that together the `Effect Time Window` and `Effect Decay Pattern` options define the numerator and denominator orders of a transfer function or dynamic regression model for the indicator variable of the intervention. See the section “[Dynamic Regressor](#)” on page 2964 for more information.

For this example, select 2 lags as the value of the `Event Time Window` option, and select `Exp` as the `Effect Decay Pattern` option. The window should now appear as shown in [Figure 47.20](#).

Figure 47.20 Complex Intervention Model

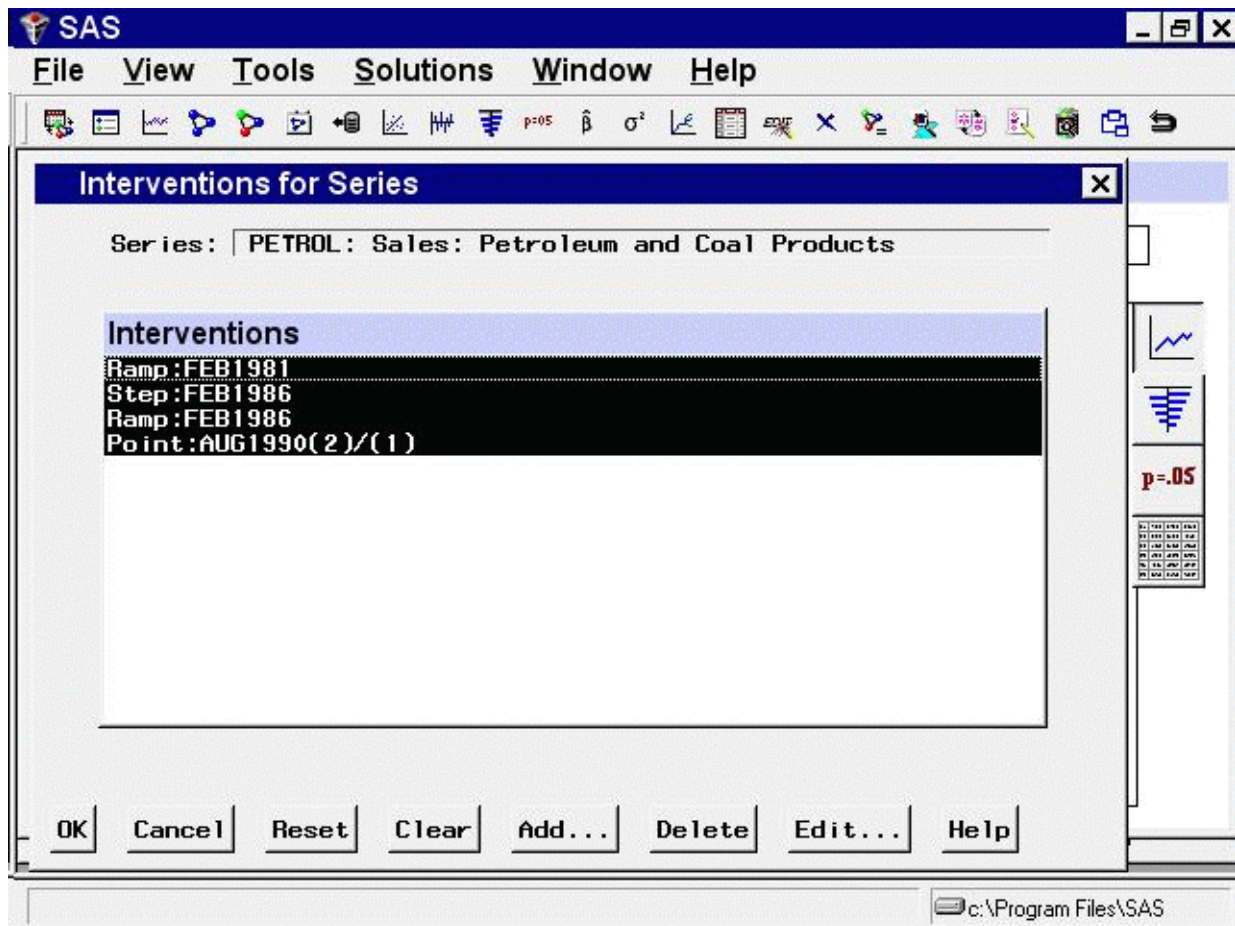


Select the **OK** button to add the intervention to the list.

Fitting the Intervention Model

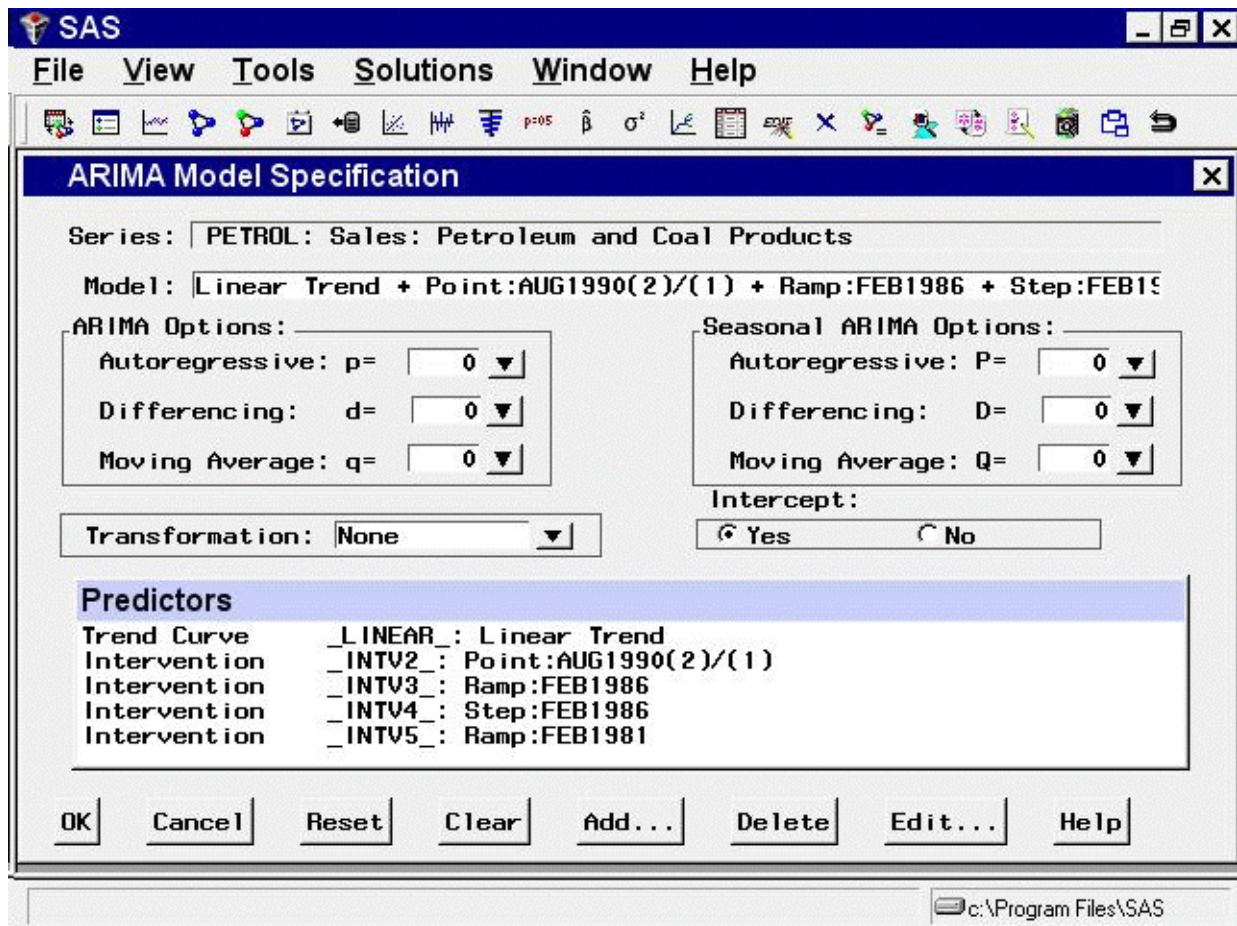
The Interventions for Series window now contains definitions for four intervention predictors. Select all four interventions, as shown in [Figure 47.21](#).

Figure 47.21 Interventions for Series Window



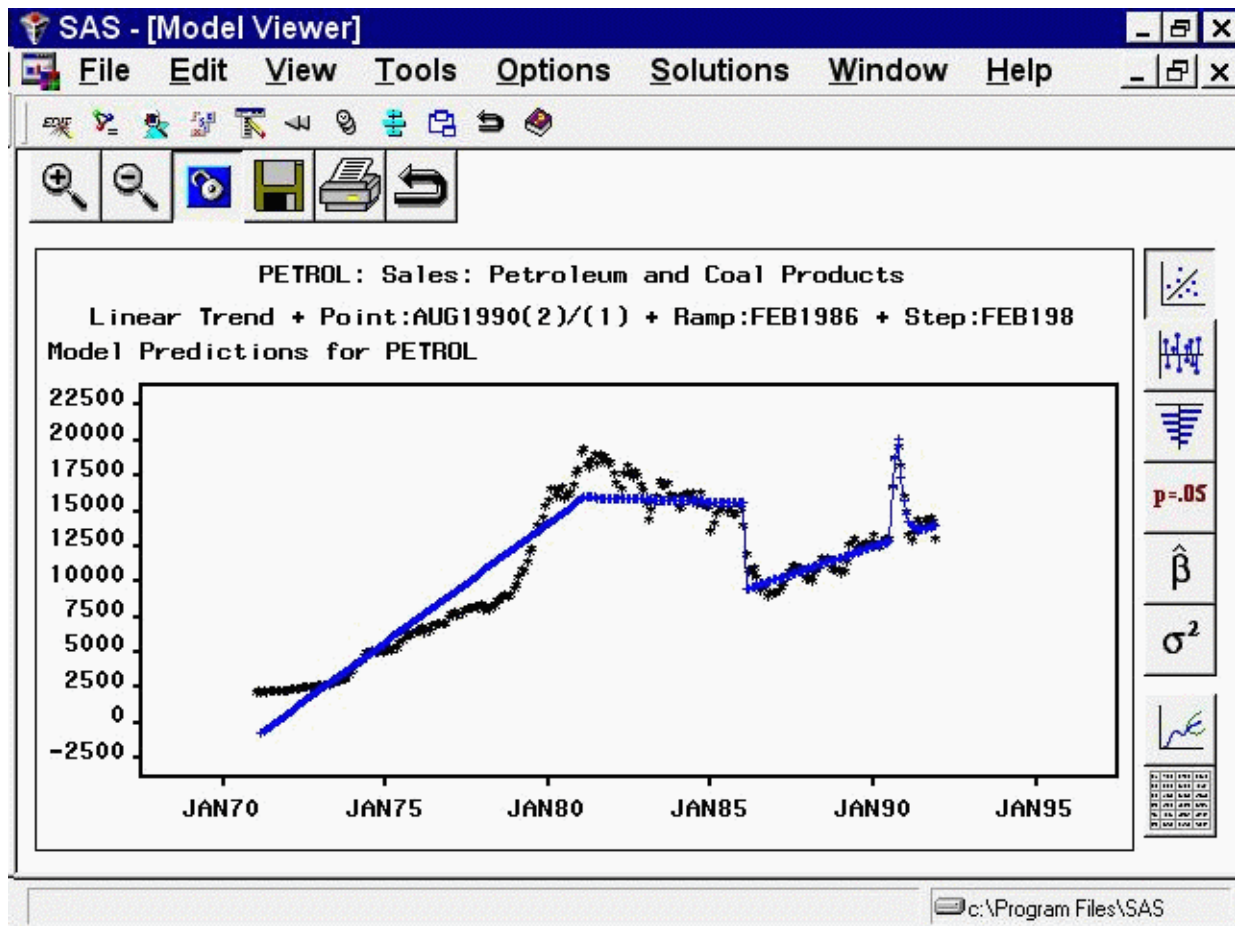
Select the **OK** button. This returns you to the ARIMA Model Specification window, which now lists items in the Predictors list, as shown in Figure 47.22.

Figure 47.22 Linear Trend with Interventions Specified



Select the **OK** button to fit this model. After the model is fit, bring up the Model Viewer. You will see a plot of the model predictions, as shown in [Figure 47.23](#).

Figure 47.23 Linear Trend with Interventions Model



You can use the Zoom In feature to take a closer look at how the complex intervention effect fits the excursion in the series starting in August 1990.

Limitations of Intervention Predictors

Note that the model you have just fit is intended only to illustrate the specification of interventions. It is not intended as an example of good forecasting practice.

The use of continuing (step and ramp type) interventions as predictors has some limitations that you should consider. If you model a change in trend with a simple ramp intervention, then the trend in the data before the date of the intervention has no influence on the forecasts. Likewise, when you use a step intervention, the average level of the series before the intervention has no influence on the forecasts.

Only the final trend and level at the end of the series are extrapolated into the forecast period. If a linear trend is the only pattern of interest, then instead of specifying step or ramp interventions, it would be simpler to adjust the period of fit so that the model ignores the data before the final trend or level change.

Step and ramp interventions are valuable when there are other patterns in the data—such as seasonality, autocorrelated errors, and error variance—that are stable across the changes in level or trend. Step and ramp interventions enable you to fit seasonal and error autocorrelation patterns to the whole series while fitting the trend only to the latter part of the series.

Point interventions are a useful tool for dealing with outliers in the data. A point intervention will fit the series value at the specified date exactly, and it has the effect of removing that point from the analysis. When you specify an effect time window, a point intervention will exactly fit as many additional points as the number of lags specified.

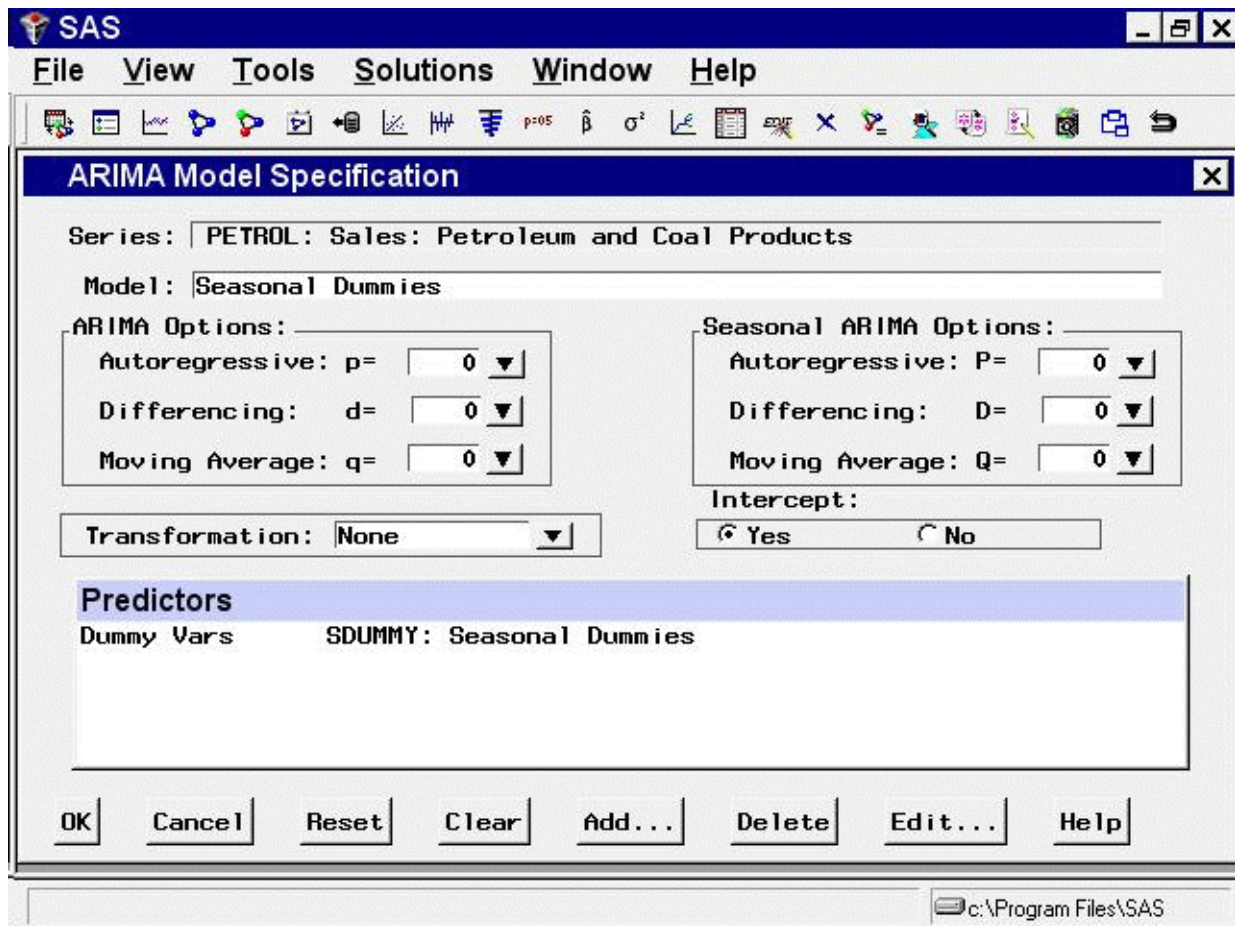
Seasonal Dummies

A *Seasonal Dummies* predictor is a special feature that adds to the model seasonal indicator or “dummy” variables to serve as regressors for seasonal effects.

From the Develop Models window, select **Fit ARIMA Model**. From the ARIMA Model Specification window, select **Add** and then select **Seasonal Dummies** from the menu (shown in [Figure 47.1](#)).

A Seasonal Dummies input is added to the Predictors list, as shown in [Figure 47.24](#).

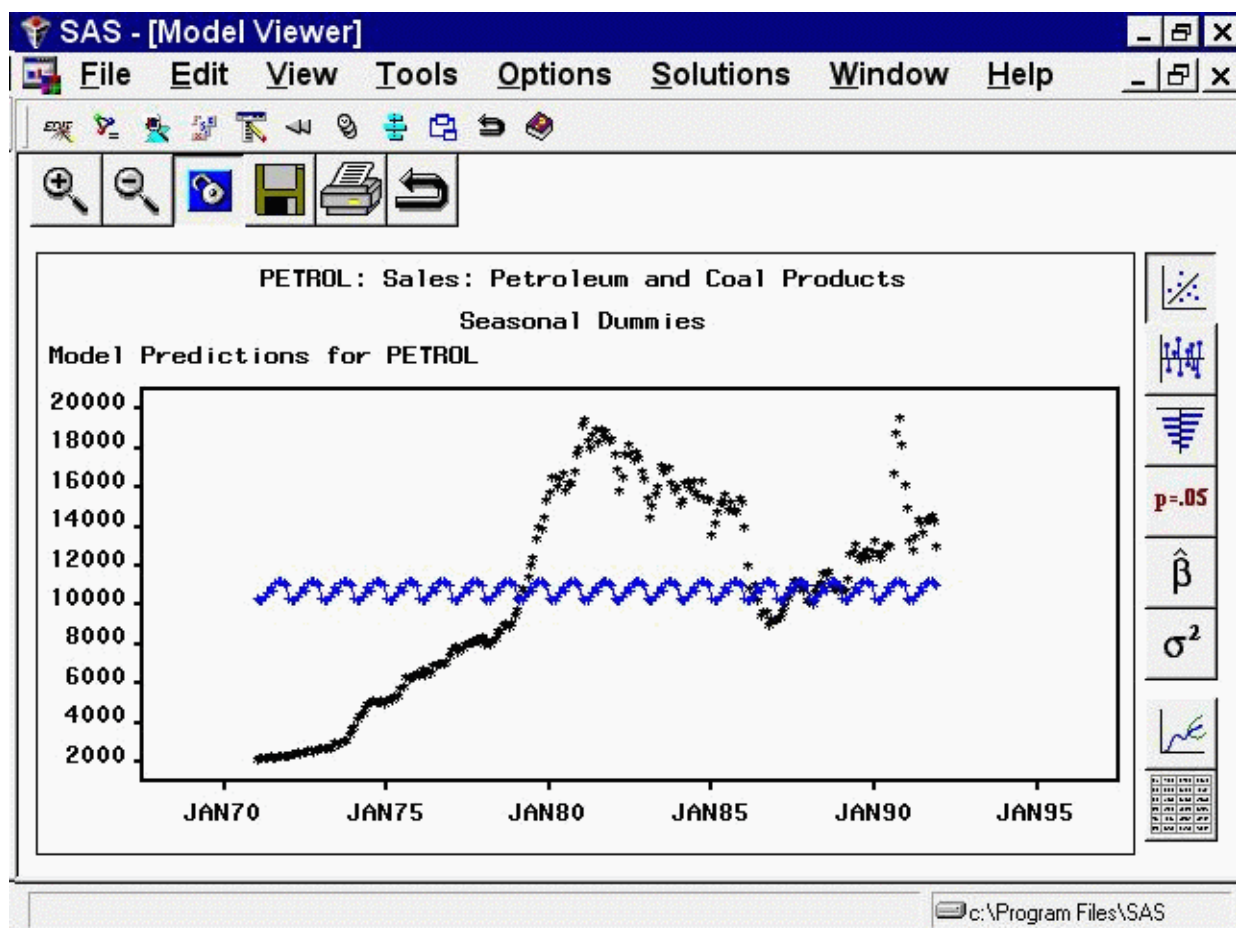
Figure 47.24 Seasonal Dummies Specified



Select the **OK** button. A model consisting of an intercept and 11 seasonal dummy variables is fit and added to the model list in the Develop Models window. This is effectively a mean model with a separate mean for each month.

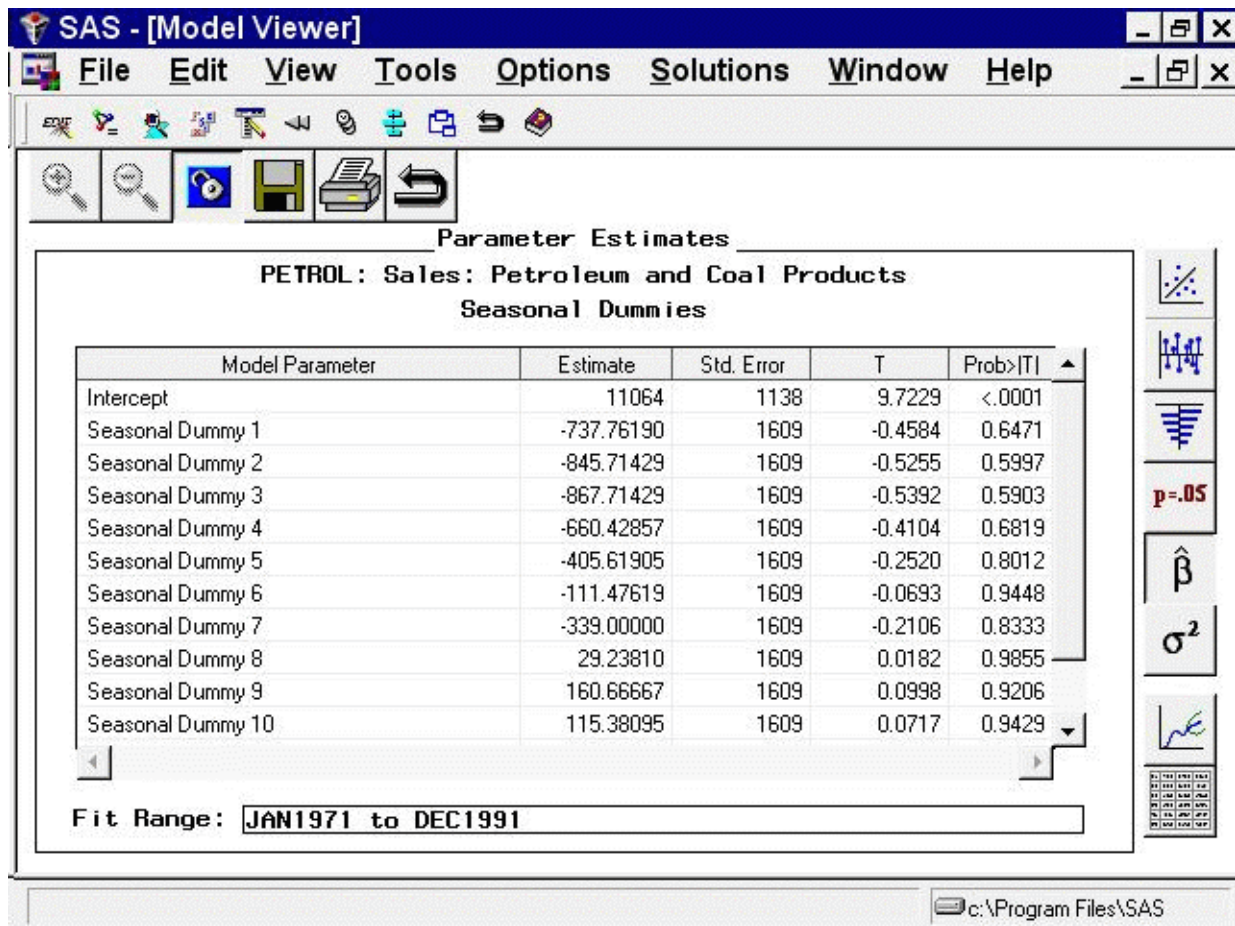
Now return to the Model Viewer, which displays a plot of the model predictions and actual series values, as shown in Figure 47.25. This is obviously a poor model for this series, but it serves to illustrate how seasonal dummy variables work.

Figure 47.25 Seasonal Dummies Model



Now select the parameter estimates icon, the fifth from the top on the vertical toolbar. This displays the Parameter Estimates table, as shown in Figure 47.26.

Figure 47.26 Parameter Estimates for Seasonal Dummies Model



Since the data for this example are monthly, the Seasonal Dummies option added 11 seasonal dummy variables. These include a dummy regressor variable that is 1.0 for January and 0 for other months, a regressor that is 1.0 only for February, and so forth through November.

Because the model includes an intercept, no dummy variable is added for December. The December effect is measured by the intercept, while the effect of other seasons is measured by the difference between the intercept and the estimated regression coefficient for the season's dummy variable.

The same principle applies for other data frequencies: the "Seasonal Dummy 1" parameter always refers to the first period in the seasonal cycle; and, when an intercept is present in the model, there is no seasonal dummy parameter for the last period in the seasonal cycle.

References

Box, G.E.P. and Jenkins, G.M. (1976), *Time Series Analysis: Forecasting and Control*, San Francisco: Holden-Day.

Pankratz, Alan (1991), *Forecasting with Dynamic Regression Models*, New York: John Wiley & Sons.

Chapter 48

Command Reference

Contents

TSVIEW Command and Macro	2985
Syntax	2985
Examples	2986
FORECAST Command and Macro	2986
Syntax	2987
Examples	2990

TSVIEW Command and Macro

The TSVIEW command invokes the Time Series Viewer. This is a component of the Time Series Forecasting System that can also be used as a standalone graphical viewer for any time series data set or view. See the section “Time Series Viewer Window” in Chapter 49, “[Window Reference](#),” for more information.

The TSVIEW command must be specified from the command line or an SCL program. If you need to submit from the program editor, use the %TSVIEW macro instead. You can use the macro within a data step program, but you must submit it within the SAS windowing environment.

If the TSVIEW command or %TSVIEW macro is issued without arguments, the Series Selection window appears to enable you to select an input data set and series. This is equivalent to selecting “Time Series Viewer” from the Analysis submenu of the Solutions menu. By specifying the DATA= and VAR= arguments, you can bring up the Time Series Viewer window directly. The ID= and INTERVAL= arguments are useful when the system cannot determine them automatically from the data.

Syntax

The TSVIEW command has the following form:

```
TSVIEW [options] ;
```

The %TSVIEW macro has the following form:

```
%TSVIEW [(option, ..., option) ] ;
```

The following options can be specified for the command and the macro.

DATA=*data set name*

specifies the name of the SAS data set containing the input data.

VAR=*time series variable name*

specifies the series variable name. It must be a numeric variable contained in the data set.

ID=*time id variable name*

specifies the time ID variable name for the data set. If the ID= option is not specified, the system attempts to locate the variables named DATE, DATETIME, and TIME in the data set specified by the DATA= option.

INTERVAL=*interval name*

specifies the time ID interval between observations in the data set.

Examples

TSVIEW Command

```
tview data=sashelp.air var=air
tview data=dept.prod var=units id=period interval=qtr
```

%TSVIEW Macro

```
%tview( data=sashelp.air, var=air);
%tview( data=dept.prod, var=units, id=period, interval=qtr);
```

FORECAST Command and Macro

The FORECAST command invokes the Time Series Forecasting System. The command must be specified from the command line or an SCL program. If you need to submit from the program editor, use the %FORECAST macro instead. You can use the macro within a data step program, but you must submit it within the SAS windowing environment.

If the FORECAST command or %FORECAST macro is issued without arguments, the Time Series Forecasting window appears. This is equivalent to selecting “Time Series Forecasting System” from the Analysis submenu of the Solutions menu.

Using the arguments, it is possible to do the following:

- Bring up the system with information already filled into some of the fields

- Bring up the system starting at a different window than the default Time Series Forecasting window
- Run the system in unattended mode so that a task such as creating a forecast data set is accomplished without any user interaction. By submitting such commands repeatedly from a SAS/AF or SAS/EIS application, it is possible to do “batch” processing for many data sets or by-group processing for many subsets of a data set. You can create a project in unattended mode and later open it for inspection interactively. You can also create a project interactively in order to set options, fit a model, or edit the list of models, and then use this project later in unattended mode.

The `Forecast Command Builder`, a point-and-click SAS/AF application, makes it easy to specify, run, save, and rerun forecasting jobs by using the `FORECAST` command. To use it, enter the following on the command line (not the program editor):

```
%FCB
```

or

```
AF C=SASHELP.FORCAST.FORCCMD.FRAME.
```

Syntax

The `FORECAST` command has the following form:

FORECAST [*options*] ;

The `%FORECAST` macro has the following form:

%FORECAST [(*option*, ..., *option*)] ;

The following options can be specified for the command and the macro.

PROJECT=*project name*

specifies the name of the SAS catalog entry in which forecasting models and other results are stored and from which previously stored results are loaded into the forecasting system.

DATA=*data set name*

specifies the name of the SAS data set containing the input data.

VAR=*time series variable name*

specifies the series variable name. It must be a numeric variable contained in the data set.

ID=*time id variable name*

specifies the time ID variable name for the data set. If the `ID=` option is not specified, the system attempts to locate the variables named `DATE`, `DATETIME`, and `TIME` in the data set specified by the `DATA=` option. However, it is recommended that you specify the time ID variable whenever you are using the `ENTRY=` argument.

INTERVAL=*interval name*

specifies the time ID interval between observations in the data set. Commonly used intervals

are `year`, `semyear`, `qtr`, `month`, `semimonth`, `week`, `weekday`, `day`, `hour`, `minute`, and `second`. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for information about more complex interval specifications. If the `INTERVAL=` option is not specified, the system attempts to determine the interval based on the time ID variable. However, it is recommended that you specify the interval whenever you are using the `ENTRY=` argument.

STAT=statistic

specifies the name of the goodness-of-fit statistic to be used as the model selection criterion. The default is `RMSE`. Valid names are

<code>sse</code>	sum of square error
<code>mse</code>	mean square error
<code>rmse</code>	root mean square error
<code>mae</code>	mean absolute error
<code>mape</code>	mean absolute percent error
<code>aic</code>	Akaike information criterion
<code>sbc</code>	Schwarz Bayesian information criterion
<code>rsquare</code>	R-square
<code>ajdrsqr</code>	adjusted R-square
<code>rwrsqr</code>	random walk R-square
<code>arsqr</code>	Amemiya's adjusted R-square
<code>apc</code>	Amemiya's prediction criterion

CLIMIT=integer

specifies the level of the confidence limits to be computed for the forecast. This integer represents a percentage; for example, `925` indicates 92.5% confidence limits. The default is `95`—that is, 95% confidence limits.

HORIZON=integer

specifies the number of periods into the future for which forecasts are computed. The default is `12` periods. The maximum is `9999`.

ENTRY=name

The name of an entry point into the system. Valid names are

<code>main</code>	starts the system at the Time Series Forecasting window (default).
<code>devmod</code>	starts the system at the Develop Models window.
<code>viewmod</code>	starts the system at the Model Viewer window. Specify a project that contains a forecasting model by using the <code>PROJECT=</code> option. If a project containing a model is not specified, the message “No forecasting model to view” appears.
<code>viewer</code>	starts the system at the Time Series Viewer window.
<code>autofit</code>	runs the system in unattended mode, fitting a forecasting model automatically and saving it in a project. If <code>PROJECT=</code> is not specified, the default project name <code>SASUSER.FMSPROJ.PROJ</code> is used.

forecast runs the system in unattended mode to generate a forecast data set. The name of this data set is specified by the **OUT=** parameter. If **OUT=** is not specified, a window appears to prompt for the name and label of the output data set. If **PROJECT=** is not specified, the default project name **SASUSER.FMSPROJ.PROJ** is used. If the project does not exist or does not contain a forecasting model for the specified series, automatic model fitting is performed and the forecast is computed by using the automatically selected model. If the project exists and contains a forecasting model for the specified series, the forecast is computed by using this model. If the series covers a different time range than it did when the project was created, use the **REFIT** or **REEVAL** keyword to reset the time ranges.

OUT=argument

specifies one or two-level name of a SAS data set in which forecasts are saved. Use in conjunction with **ENTRY=FORECAST**. If omitted, the system prompts for the name of the forecast data set.

KEEP=argument

specifies the number of models to keep in the project when automatic model fitting is performed. This corresponds to **Models to Keep** in the Automatic Model Selection Options window. A value greater than 9 indicates that all models are kept. The default is 1.

DIAG=YES|NO

specifies which models to search with regard to series diagnostics. **DIAG= YES** causes the automatic model selection process to search only over those models that are consistent with the series diagnostics. **DIAG= NO** causes the automatic model selection process to search over all models in the selection list, without regard for the series diagnostics. This corresponds to **Models to Fit** in the Automatic Model Selection Options window. The default is **YES**.

REFIT=keyword

(for macro usage) refits a previously saved forecasting model by using the current fit range; that is, it reestimates the model parameters. Refitting also causes the model to be reevaluated (statistics of fit recomputed), and it causes the time ranges to be reset if the data range has changed (for example, if new observations have been added to the series). This keyword has no effect if you do not use the **PROJECT=** argument to reference an existing project containing a forecasting model. Use the **REFIT** keyword if you have added new data to the input series and you want to refit the forecasting model and update the forecast by using the new time ranges. Be sure to use the same project, data set, and series names that you used previously.

REEVAL=keyword

(for macro usage) reevaluates a previously saved forecasting model by using the current evaluation range; that is, it recomputes the statistics of fit. Reevaluating also causes the time ranges to be reset if the data range has changed (for example, if new observations have been added to the series). It does not refit the model parameters. This keyword has no effect if you also specify **REFIT**, or if you do not use the **PROJECT=** argument to reference an existing project containing a forecasting model. Use the **REEVAL** keyword if you have added new data to the input series and want to update your forecast by using a previously fit forecasting model and the same project, data set, and series names that you used previously.

Examples

FORECAST Command

The following command opens the Time Series Forecasting window with the data set name and series name filled in. The time ID variable is also filled in since the data set contains the variable DATE. The interval is filled in because the system recognizes that the observations are monthly.

```
forecast data=sashelp.air var=air
```

The following command opens the Time Series Forecasting window with the project, data set name, series, time ID, and interval fields filled in, assuming that the project SAMPROJ was previously saved either interactively or by using unattended mode as depicted below. Previously fit models appear when the Develop Models or Manage Projects window is opened.

```
forecast project=samproj
```

The following command runs the system in unattended mode, fitting a model automatically, storing it in the project SAMPROJ in the default catalog SASUSER.FMSPROJ, and placing the forecasts in the data set WORK.SAMPOUT.

```
forecast data=sashelp.workers var=electric id=date interval=month  
project=samproj entry=forecast out=sampout
```

The following command assumes that a new month's data have been added to the data set from the previous example and that an updated forecast is needed that uses the previously fit model. Time ranges are automatically updated to include the new data since the REEVAL keyword is included. Substitute REFIT for REEVAL if you want the system to reestimate the model parameters.

```
forecast data=sashelp.workers var=electric id=date interval=month  
project=samproj entry=forecast out=sampout reeval
```

The following command opens the model viewer with the project created in the previous example and with 99 percent confidence limits in the forecast graph.

```
forecast data=sashelp.workers var=electric id=date interval=month  
project=samproj entry=viewmod climit=99
```

The final example illustrates using unattended mode with an existing project that has been defined interactively. In this example, the goal is to add a model to the model selection list, to specify that all models in that list be fit, and that all models which are fit successfully be retained.

First open the Time Series Forecasting window and specify a new project name, WORKPROJ. Then select Develop Models, choosing SASHELP.WORKERS as the data set and MASONRY as the series. Now

select “Model Selection List” from the Options menu. In the Model Selection List window, click **Actions**, then **Add**, and then **ARIMA Model**. Define the model `ARIMA(0,1,0) (0,1,0)s NOINT` by setting the differencing value to 1 under both **ARIMA Options** and **Seasonal ARIMA Options**. Select **OK** to save the model and **OK** to close the Model Selection List window. Now select “Automatic Fit” from the Options menu. In the Automatic Model Selection Options window, select “All autofit models in selection list” in the **Models to fit** radio box, select “All models” from the **Models to keep** combo box, and then click **OK** to close the window. Select “Save Project” from the File menu, and then close the Develop Models window and the Time Series Forecasting window. You now have a project with a new model added to the selection list, options set for automatic model fitting, and one series selected but no models fit.

Now enter the command:

```
forecast data=sashelp.workers var=electric id=date interval=month
project=workproj entry=forecast out=workforc
```

The system runs in unattended mode to update the project and create the forecast data set **WORKFORC**. Check the messages in the Log window to find out if the run was successful and which model was selected for forecasting. To see the forecast data set, issue the command `viewtable WORKFORC`. To see the contents of the project, open the Time Series Forecasting window, open the project **WORKPROJ**, and select “Manage Projects.” You will see that the variable **ELECTRIC** was added to the project and has a forecasting model. Select this row in the table and then select **List Models** from the Tools menu. You will see that all of the models in the selection list which fit successfully are there, including the new model you added to the selection list.

%FORECAST Macro

This example demonstrates the use of the `%FORECAST` macro to start the Time Series Forecasting System from a SAS program submitted from the Editor window. The SQL procedure is used to create a view of a subset of a products data set. Then the `%FORECAST` macro is used to produce forecasts.

```
proc sql;
  create view selprod as
  select * from products
  where type eq 'A'
  order by date;
run;

%forecast(data=selprod, var=amount, id=date, interval=day,
  entry=forecast, out=typea, project=proda, refit= );
```


Chapter 49

Window Reference

Contents

Overview	2994
Adjustments Selection Window	2994
AR/MA Polynomial Specification Window	2995
ARIMA Model Specification Window	2997
ARIMA Process Specification Window	2999
Automatic Model Fitting Window	3001
Automatic Model Fitting Results Window	3005
Automatic Model Selection Options Window	3008
Custom Model Specification Window	3009
Data Set Selection Window	3012
Default Time Ranges Window	3014
Develop Models Window	3015
Differencing Specification Window	3022
Dynamic Regression Specification Window	3023
Dynamic Regressors Selection Window	3025
Error Model Options Window	3026
External Forecast Model Specification Window	3027
Factored ARIMA Model Specification Window	3028
Forecast Combination Model Specification Window	3029
Forecasting Project File Selection Window	3031
Forecast Options Window	3033
Intervention Specification Window	3034
Interventions for Series Window	3035
Manage Forecasting Project Window	3037
Model Fit Comparison Window	3043
Model List Window	3044
Model Selection Criterion Window	3048
Model Selection List Editor Window	3049
Model Viewer Window	3053
Models to Fit Window	3059
Polynomial Specification Window	3060
Produce Forecasts Window	3061
Regressors Selection Window	3065
Save Data As	3066

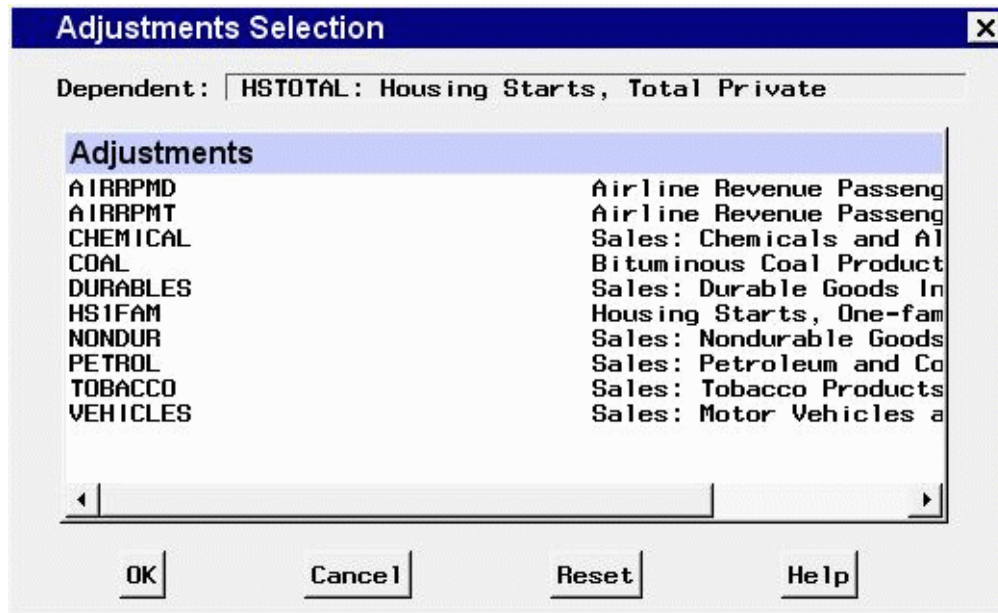
Save Graph As	3068
Seasonal ARIMA Model Options Window	3069
Series Diagnostics Window	3070
Series Selection Window	3071
Series to Process Window	3074
Series Viewer Transformations Window	3075
Smoothing Model Specification Window	3076
Smoothing Weight Optimization Window	3079
Statistics of Fit Selection Window	3080
Time ID Creation – 1,2,3 Window	3081
Time ID Creation from Several Variables Window	3082
Time ID Creation from Starting Date Window	3083
Time ID Creation Using Informat Window	3084
Time ID Variable Specification Window	3085
Time Ranges Specification Window	3086
Time Series Forecasting Window	3088
Time Series Simulation Window	3090
Time Series Viewer Window	3092

Overview

This chapter provides a reference to the various windows of the Time Series Forecasting System. The windows are presented in alphabetical order by name. Each section describes the purpose of the window, how to open it, its controls, fields, and menus. For windows that have their own menus, there is a description of each menu item under the heading “Menu Bar.” These windows also have a toolbar with icons that duplicate the more commonly used menu items. Each icon has a *screen tip*: a brief description that appears when you hover the mouse cursor over the icon. If you don’t see the screen tips, open the SAS Preferences window, under the Options submenu of the Tools menu. Select the View tab and make sure the “Screen tips” check box is checked.

Adjustments Selection Window

Use the Adjustments Selection window to select input variables for use as adjustments to the forecasts and add them to the Predictors list. Invoke this window from the pop-up menu that appears when you select the Add button of the ARIMA Model Specification window or Custom Model Specification window. For more information, see the “Adjustments” section in Chapter 47, “Using Predictor Variables.”



Controls and Fields

Dependent

is the name and variable label of the current series.

Adjustments

is a table that lists the names and labels in the input data set available for selection as adjustments. The variables you select are highlighted. Selecting a highlighted row again deselects that variable.

OK

closes the Adjustments Selection window and adds the selected variables as adjustments in the model.

Cancel

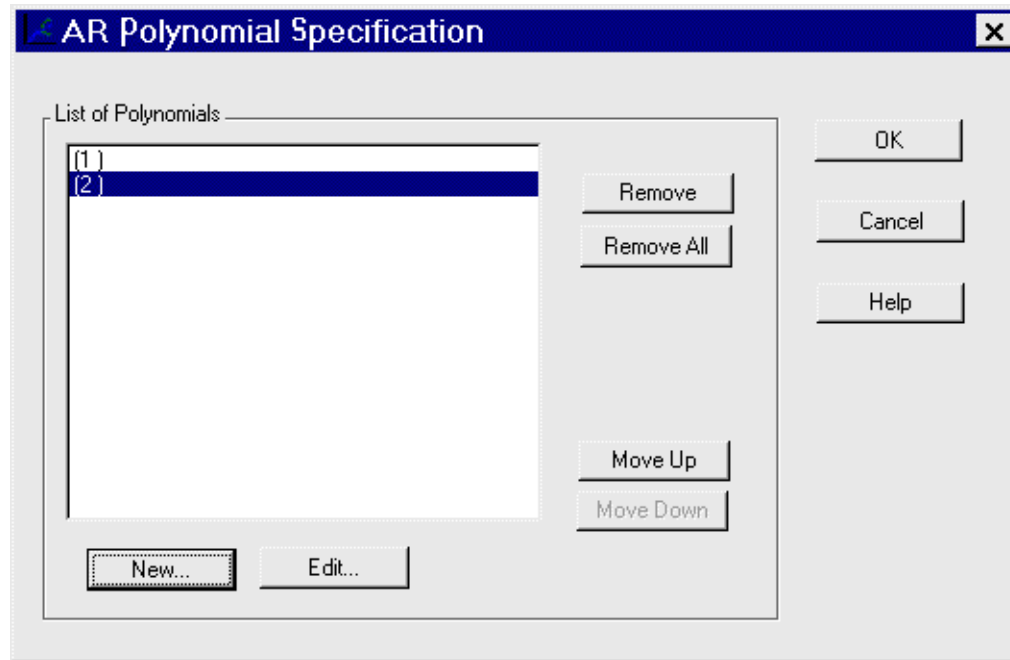
closes the window without adding any adjustments.

Reset

resets all selections to their initial values upon entry to the window.

AR/MA Polynomial Specification Window

Use these windows to specify the autoregressive and moving-average terms in a factored ARIMA model. Access the AR Polynomial Specification window from the Set button next to the Autoregressive term in the Factored ARIMA Model Specification window. Access the MA Polynomial Specification window from the Set button next to the Moving Average term.



Controls and Fields

List of Polynomials

Lists the polynomials that have been specified. Each polynomial is represented by a comma-delimited list of lag values enclosed in parentheses.

New

Opens the Polynomial Specification window to add a new polynomial to the model.

Edit

Opens the Polynomial Specification window to edit a polynomial that has been selected. If no polynomial is selected, this button is unavailable.

Remove

Removes a selected polynomial from the list. If none are selected, this button is unavailable.

Remove All

Clears the list of polynomials.

Move Up

Moves a selected polynomial up one position in the list. If no polynomial is selected, or the first one is selected, this button is unavailable.

Move Down

Moves a selected polynomial down one position in the list. If no polynomial is selected, or the last one is selected, this button is unavailable.

OK

Closes the window and returns the specified list of polynomials to the Factored ARIMA Model Specification window.

Cancel

Closes the window and discards any changes made to the list of polynomials.

ARIMA Model Specification Window

Use the ARIMA Model Specification window to specify and fit an ARIMA model with or without predictor effects as inputs. Access it from the Develop Models menu, where it is invoked from the Fit Model item under Edit in the menu bar, or from the pop-up menu when you click an empty area of the model table.

ARIMA Model Specification

Series:

Model:

ARIMA Options:

Autoregressive: p=

Differencing: d=

Moving Average: q=

Seasonal ARIMA Options:

Autoregressive: P=

Differencing: D=

Moving Average: Q=

Transformation:

Intercept: ☒ Yes ☐ No

Predictors

OK Cancel Reset Clear Add... Delete Edit... Help

Controls and Fields

Series

is the name and variable label of the current series.

Model

is a descriptive label for the model that you specify. You can type a label in this field or allow the system to provide a label. If you leave the label blank, a label is generated automatically based on the options you specify.

ARIMA Options

specify the orders of the ARIMA model. You can either type in a value or click the arrow to select from a list.

Autoregressive

defines the order of the autoregressive part of the model.

Differencing

defines the order of simple differencing—for example, first difference or second difference.

Moving Average

defines the order of the moving-average part of the model.

Seasonal ARIMA Options

specify the orders of the seasonal part of the ARIMA model. You can either type in a value or click the arrow to select from a list.

Autoregressive

defines the order of the seasonal autoregressive part of the model.

Differencing

defines the order of seasonal differencing—for example, first difference or second difference at the seasonal lags.

Moving Average

defines the order of the seasonal moving-average part of the model.

Transformation

defines the series transformation for the model. When a transformation is specified, the ARIMA model is fit to the transformed series, and forecasts are produced by applying the inverse transformation to the ARIMA model predictions. The available transformations are: Log, Logistic, Square Root, Box-Cox, and None.

Intercept

specify whether a mean or intercept parameter is included in the ARIMA model. By default, the Intercept option is set to No when the model includes differencing and Yes when there is no differencing.

Predictors

lists the predictor effects included as inputs in the model.

OK

closes the ARIMA Model Specification window and fits the model.

Cancel

closes the ARIMA Model Specification window without fitting the model. Any options you specified are lost.

Reset

resets all options to their initial values upon entry to the ARIMA Model Specification window. This might be useful when editing an existing model specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

Add

opens a menu of types of predictors to add to the Predictors list.

Delete

deletes the selected (highlighted) entry from the Predictors list.

Edit

edits the selected (highlighted) entry in the Predictors list.

Mouse Button Actions

You can select or deselect entries in the Predictors list by clicking them. The selected (highlighted) predictor effect is acted on by the Delete and Edit buttons. Double-clicking on a predictor in the list invokes an appropriate edit action for that predictor.

If you right-click an entry in the Predictors list, the system displays the following menu of actions that encompass the features of the Add, Delete, and Edit buttons.

Add Linear Trend

adds a Linear Trend item to the Predictors list.

Add Trend Curve

opens a menu of different time trend curves and adds the curve you select to the Predictors list. Certain trend curve specifications also set the Transformation field.

Add Regressors

opens the Regressors Selection window to enable you to select other series in the input data set as regressors to predict the dependent series and add them to the Predictors list.

Add Adjustments

opens the Adjustments Selection window to enable you to select other series in the input data set for use as adjustments to the forecasts and add them to the Predictors list.

Add Dynamic Regressor

opens the Dynamic Regressor Selection window to enable you to select a series in the input data set as a predictor of the dependent series and also specify a transfer function model for the effect of the predictor series.

Add Interventions

opens the Interventions for Series window to enable you to define and select intervention effects and add them to the Predictors list.

Add Seasonal Dummies

adds a Seasonal Dummies predictor item to the Predictors list.

Edit Predictor

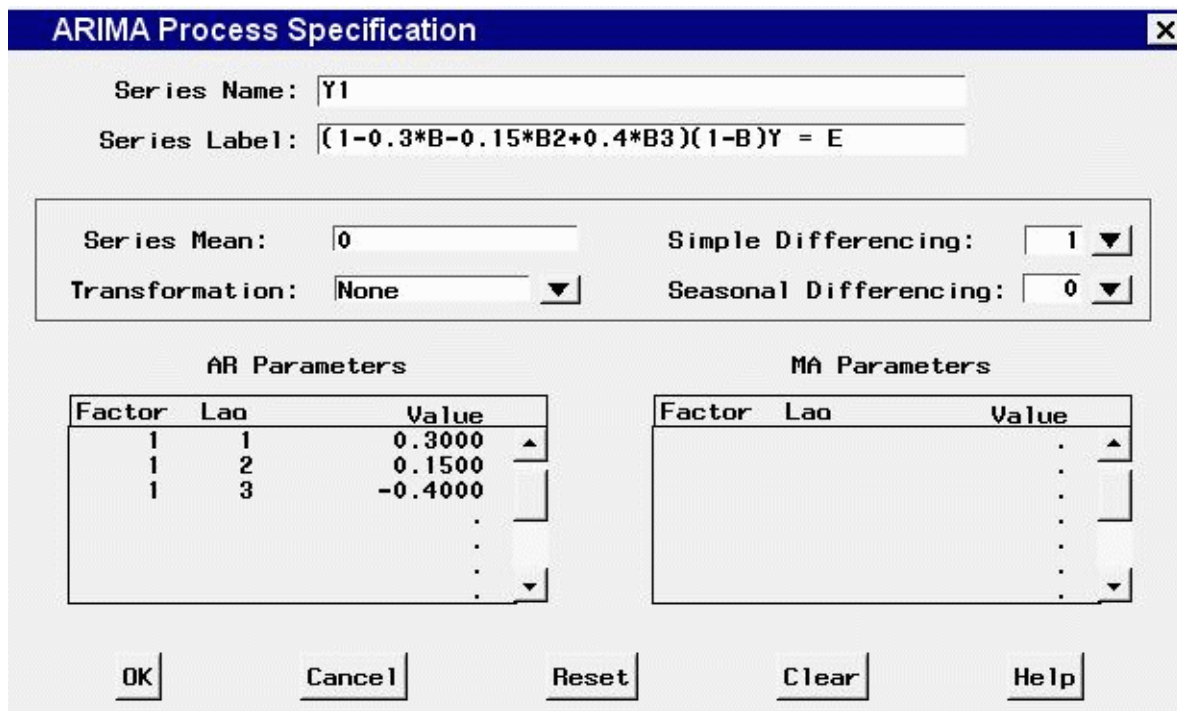
edits the selected (highlighted) entry in the Predictors list.

Delete Predictors

deletes the selected (highlighted) entry from the Predictors list.

ARIMA Process Specification Window

Use the ARIMA Process Specification window to define ARIMA processes for simulation. Invoke this window from the Add Series button in the Time Series Simulation window.



The dialog box is titled "ARIMA Process Specification". It contains the following fields and controls:

- Series Name:** Y1
- Series Label:** $(1-0.3*B-0.15*B^2+0.4*B^3)(1-B)Y = E$
- Series Mean:** 0
- Transformation:** None (dropdown menu)
- Simple Differencing:** 1 (dropdown menu)
- Seasonal Differencing:** 0 (dropdown menu)
- AR Parameters Table:**

Factor	Lag	Value
1	1	0.3000
1	2	0.1500
1	3	-0.4000
		.
		.
		.
- MA Parameters Table:**

Factor	Lag	Value
		.
		.
		.
		.
		.
- Buttons:** OK, Cancel, Reset, Clear, Help

Controls and Fields

Series Name

is the variable name for the series to be simulated.

Series Label

is the variable label for the series to be simulated.

Series Mean

is the mean of the simulated series.

Transformation

defines the series transformation.

Simple Differencing

is the order of simple differencing for the series.

Seasonal Differencing

is the order of seasonal differencing for the series.

AR Parameters

is a table of autoregressive terms for the simulated ARIMA process. Enter a value for Factor, Lag, and Value for each term of the AR part of the process you want to simulate. For a non-factored AR model, make the Factor values the same for all terms. For a factored AR model, use different Factor values to group the terms into the factors.

MA Parameters

is a table of moving-average terms for the simulated ARIMA process. Enter a value for Factor, Lag, and Value for each term of the MA part of the process you want to simulate. For a non-factored MA model, make the Factor values the same for all terms. For a factored MA model, use different Factor values to group the terms into the factors.

OK

closes the ARIMA Process Specification window and adds the specified process to the Series to Generate list in the Time Series Simulation window.

Cancel

closes the window without adding to the Series to Generate list. Any options you specified are lost.

Reset

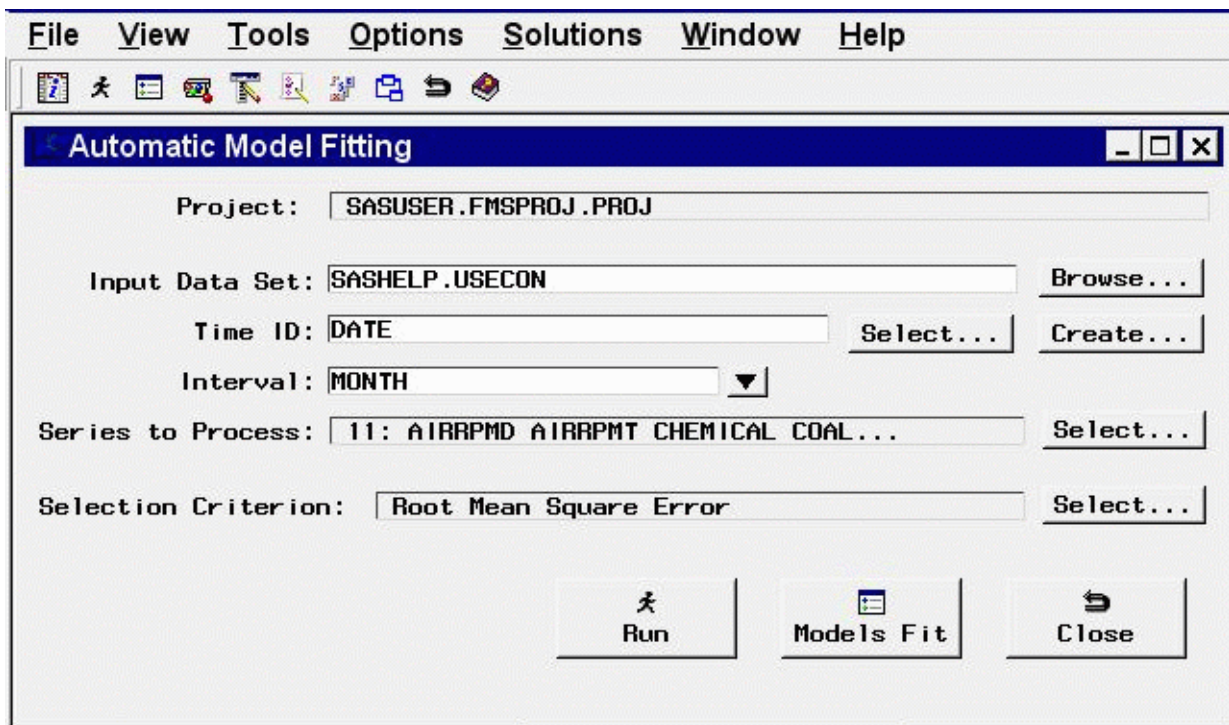
resets all the fields to their initial values upon entry to the window.

Clear

resets all the fields to their default values.

Automatic Model Fitting Window

Use the Automatic Model Fitting window to perform automatic model selection on all series or selected series in an input data set. Invoke this window by using the Fit Models Automatically button on the Time Series Forecasting window. Note that you can also perform automatic model fitting, one series at a time, from the Develop Models window.



Controls and Fields

Project

the name of the SAS catalog entry in which the results of the model search process are stored.

Input Data Set

is the name of the current input data set. You can type in a one-level or two-level data set name here.

Browse button

opens the Data Set Selection window for selecting an input data set.

Time ID

is the name of the ID variable for the input data set. You can type in the variable name here or use the Select or Create button.

time ID Select button

opens the Time ID Variable Specification window.

time ID Create button

opens a menu of choices of methods for creating a time ID variable for the input data set. Use this feature if the input data set does not already contain a valid time ID variable.

Interval

is the time interval between observations (data frequency) in the current input data set. You can type in an interval name or select one by using the combo box pop-up menu.

Series to Process

indicates the number and names of time series variables for which forecasting model selection will be applied.

Series to Process Select button

opens the Series to Process window to let you select the series for which you want to fit models.

Selection Criterion

shows the goodness-of-fit statistic that will be used to determine the best fitting model for each series.

Selection Criterion Select button

opens the Model Selection Criterion window to enable you to select the goodness-of-fit statistic that will be used to determine the best fitting model for each series.

Run button

begins the automatic model fitting process.

Models Fit button

opens the Automatic Model Fitting Results window to display the models fit during the current invocation of the Automatic Model Fitting window. The results appear automatically when model fitting is complete, but this button enables you to redisplay the results window.

Close button

Closes the Automatic Model Fitting window.

Menu Bar

File**Import Data**

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Close

closes the Automatic Model Fitting window.

View**Input Data Set**

opens a Viewtable window to browse the current input data set.

Models Fit

opens Automatic Model Fitting Results window to show the forecasting models fit during the current invocation of the Automatic Model Fitting window. This is the same as the Models Fit button.

Tools**Fit Models**

performs the automatic model selection process for the selected series. This is the same as the Run button.

Options**Default Time Ranges**

opens the Default Time Ranges window to enable you to control how the system sets the time ranges for series.

Model Selection List

opens the Model Selection List editor window. Use this action to control the forecasting models considered by the automatic model selection process and displayed in the Models to Fit window.

Model Selection Criterion

opens the Model Selection Criterion window, which presents a list of goodness-of-fit statistics and enables you to select the fit statistic that is displayed in the table and used by the automatic model selection process to determine the best fitting model. This action is the same as the Selection Criterion Select button.

Statistics of Fit

opens the Statistics of Fit Selection window, which presents a list of statistics that the system can display. Use this action to customize the list of statistics shown in the Statistics of Fit table and available for selection in the Model Selection Criterion menu.

Forecast Options

opens the Forecast Options window, which enables you to control the widths of forecast confidence limits and control the kind of predicted values computed for models that include series transformations.

Forecast Data Set

see Produce Forecasts window.

Alignment of Dates**Beginning**

aligns dates that the system generates to identify forecast observations in output data sets to the beginning of the time intervals.

Middle

aligns dates that the system generates to identify forecast observations in output data sets to the midpoints of the time intervals.

End

aligns dates that the system generates to identify forecast observations in output data sets to the end of the time intervals.

Automatic Fit

opens the Automatic Model Selection Options window, which enables you to control the number of models retained by the automatic model selection process and whether the models considered for automatic selection are subset according to the series diagnostics.

Tool Bar Type**Image Only**

displays the toolbar items as icons without text.

Label Only

displays the toolbar items as text without icon images.

Both

displays the toolbar items with both text and icon images.

Include Interventions

controls whether intervention effects defined for the current series are automatically added as predictors to the models considered by the automatic selection process. A check mark or filled check box next to this item indicates that the option is turned on.

Print Audit Trail

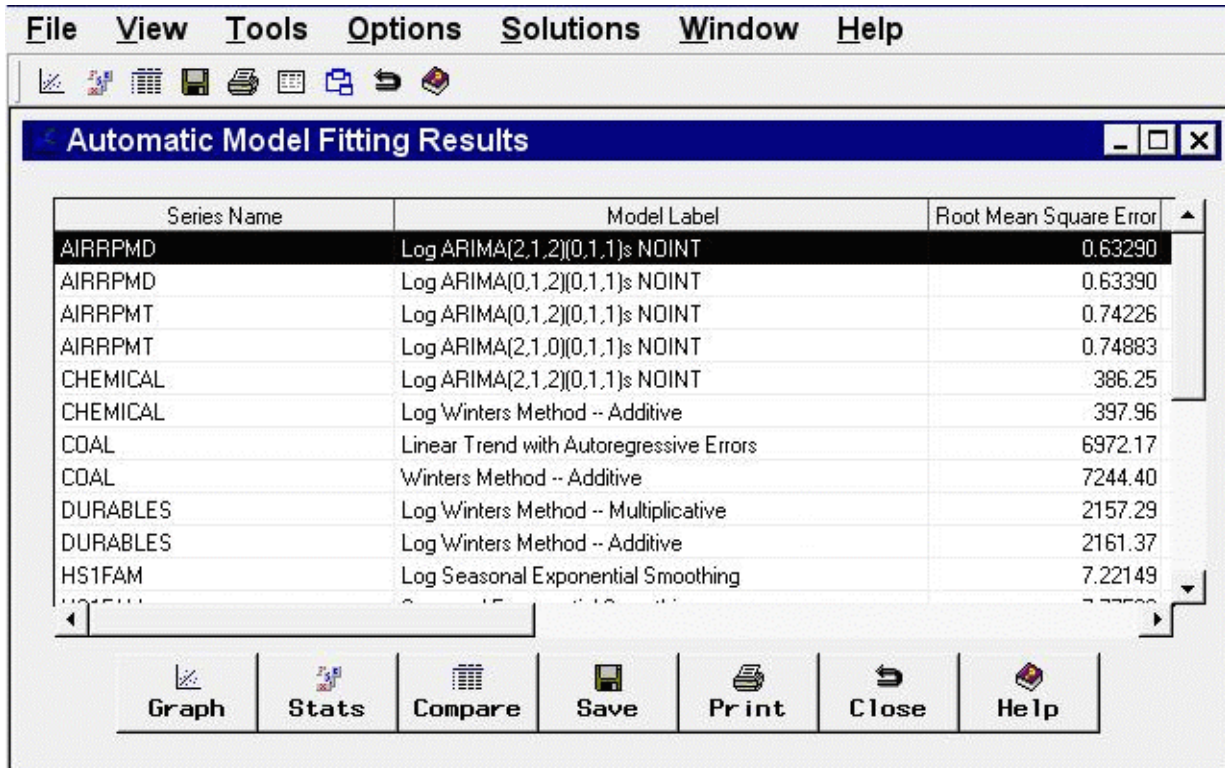
prints to the SAS log information about the models fit by the system. A check mark or filled check box next to this item indicates that the audit option is turned on.

Show Source Statements

controls whether SAS statements submitted by the forecasting system are printed in the SAS log. When the Show Source Statements option is selected, the system sets the SAS system option SOURCE before submitting SAS statements; otherwise, the system uses the NOSOURCE option. Note that only some of the functions performed by the forecasting system are accomplished by submitting SAS statements. A check mark or filled check box next to this item indicates that the option is turned on.

Automatic Model Fitting Results Window

This resizable window displays the models fit by the most recent invocation of the Automatic Model Fitting window. It appears automatically after Automatic Model Fitting runs, and can be opened repeatedly from that window by using the Models Fit button or by selecting Models Fit from the View menu. Once you exit the Automatic Model Fitting window, the Automatic Model Fitting Results window cannot be opened again until you fit additional models by using Automatic Model Fitting.



Series Name	Model Label	Root Mean Square Error
AIRRPM	Log ARIMA(2,1,2)(0,1,1)s NOINT	0.63290
AIRRPM	Log ARIMA(0,1,2)(0,1,1)s NOINT	0.63390
AIRRPM	Log ARIMA(0,1,2)(0,1,1)s NOINT	0.74226
AIRRPM	Log ARIMA(2,1,0)(0,1,1)s NOINT	0.74883
CHEMICAL	Log ARIMA(2,1,2)(0,1,1)s NOINT	386.25
CHEMICAL	Log Winters Method -- Additive	397.96
COAL	Linear Trend with Autoregressive Errors	6972.17
COAL	Winters Method -- Additive	7244.40
DURABLES	Log Winters Method -- Multiplicative	2157.29
DURABLES	Log Winters Method -- Additive	2161.37
HS1FAM	Log Seasonal Exponential Smoothing	7.22149

Table Contents The results table displays the series name in the first column and the model label in the second column. If you have chosen to retain more than one model by using the Automatic Model Selection Options window, more than one row appears in the table for each series; that is, there is a row for each model fit. If you have already fit models to the same series before invoking the Automatic Model Fitting window, those models do not appear here, since the Automatic Model Fitting Results window is intended to show the results of the current operation of Automatic Model Fitting. To see all models that have been fit, use the Manage Projects window.

The third column of the table shows the values of the current model selection criterion statistic. Additional columns show the values of other fit statistics. The set of statistics shown are selectable by using the Statistics of Fit Selection window.

The table can be sorted by any column other than Series Name by clicking on the column heading.

Controls and Fields

Graph

opens the Model Viewer window on the model currently selected in the table.

Stats

opens the Statistics of Fit Selection window. This controls the set of goodness-of-fit statistics displayed in the table and in other parts of the Time Series Forecasting System.

Compare

opens the Model Fit Comparison window for the series currently selected in the table. This button is unavailable if the currently selected row in the table represents a series for which fewer than two models have been fit.

Save

opens an output data set dialog, enabling you to specify a SAS data set to which the contents of the table is saved. Note that this operation saves what you see in the table. If you want to save the models themselves for use in a future session, use the Manage Projects window.

Print

prints the contents of the table.

Close

closes the window and returns to the Automatic Model Fitting window.

Menu Bar

File

Save

opens an output data set dialog, enabling you to specify a SAS data set to which the contents of the table is saved. This is the same as the Save button.

Print

prints the contents of the table. This is the same as the Print button.

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Close

closes the window and returns to the Automatic Model Fitting window.

View

Model Predictions

opens the Model Viewer to display a predicted and actual plot for the currently highlighted model.

Prediction Errors

opens the Model Viewer to display the prediction errors for the currently highlighted model.

Prediction Error Autocorrelations

opens the Model Viewer to display the prediction error autocorrelations, partial autocorrelations, and inverse autocorrelations for the currently highlighted model.

Prediction Error Tests

opens the Model Viewer to display graphs of white noise and stationarity tests on the prediction errors of the currently highlighted model.

Parameter Estimates

opens the Model Viewer to display the parameter estimates table for the currently highlighted model.

Statistics of Fit

opens the Model Viewer window to display goodness-of-fit statistics for the currently highlighted model.

Forecast Graph

opens the Model Viewer to graph the forecasts for the currently highlighted model.

Forecast Table

opens the Model Viewer to display forecasts for the currently highlighted model in a table.

Tools

Compare Models

opens the Model Fit Comparison window to display fit statistics for selected pairs of forecasting models. This item is unavailable until you select a series in the table for which the automatic model fitting run selected two or more models.

Options

Statistics of Fit

opens the Statistics of Fit Selection window. This is the same as the Stats button.

Column Labels

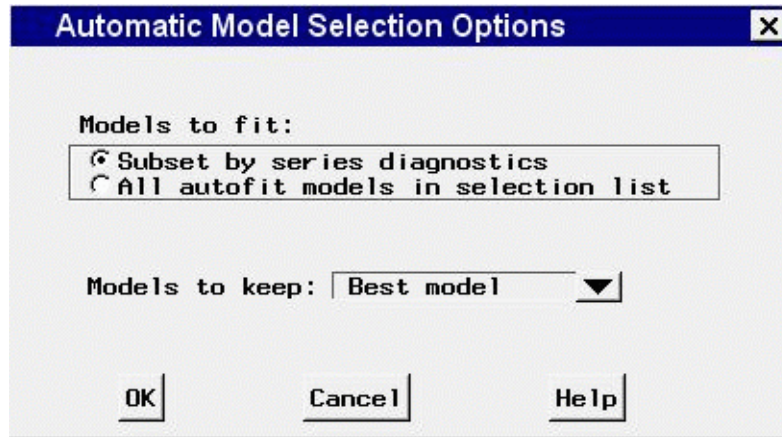
selects long or short column labels for the table. Long column labels are used by default.

ID Columns

freezes or unfreezes the series and model columns. By default they are frozen so that they remain visible when you scroll the table horizontally to view other columns.

Automatic Model Selection Options Window

Use the Automatic Model Selection Options window to control the automatic selection process. This window is available from the Automatic Fit item of the Options menu in the Develop Models window, Automatic Model Fitting window, and Produce Forecasts window.



Controls and Fields

Models to fit

Subset by series diagnostics

when selected, causes the automatic model selection process to search only over those models consistent with the series diagnostics.

All models in selection list

when selected, causes the automatic model selection process to search over all models in the search list, without regard for the series diagnostics.

Models to keep

specifies how many of the models tried by the automatic model selection process are retained and added to the model list for the series. You can specify the best fitting model only, the best n models, where n can be 1 through 9, or all models tried.

OK

closes the window and saves the automatic model selection options you specified.

Cancel

closes the window without changing the automatic model selection options.

Custom Model Specification Window

Use the Custom Model Specification window to specify and fit an ARIMA model with or without predictor effects as inputs. Access it from the Develop Models window, where it is invoked from the Fit Model item under the Edit menu, or from the pop-up menu when you click an empty area of the model table.

Controls and Fields

Series

is the name and variable label of the current series.

Model

is a descriptive label for the model that you specify. You can type a label in this field or allow the system to provide a label. If you leave the label blank, a label is generated automatically based on the options you specify.

Transformation

defines the series transformation for the model. When a transformation is specified, the model is fit to the transformed series, and forecasts are produced by applying the inverse transformation to the resulting forecasts. The following transformations are available:

Log

specifies a logarithmic transformation.

Logistic

specifies a logistic transformation.

Square Root

specifies a square root transformation.

Box-Cox

specifies a Box-Cox transform and opens a window to specify the Box-Cox λ parameter.

None

specifies no series transformation.

Trend Model

controls the model options to model and forecast the series trend. Select from the following:

Linear Trend

adds a Linear Trend item to the Predictors list.

Trend Curve

brings a menu of different time trend curves and adds the curve you select to the Predictors list.

First Difference

specifies differencing the series.

Second Difference

specifies second-order differencing of the series.

None

specifies no model for the series trend.

Seasonal Model

controls the model options to model and forecast the series seasonality. Select from the following:

Seasonal ARIMA

opens the Seasonal ARIMA Model Options window to enable you to specify an ARIMA model for the seasonal pattern in the series.

Seasonal Difference

specifies differencing the series at the seasonal lag.

Seasonal Dummy Regressors

adds a Seasonal Dummies predictor item to the Predictors list.

None

specifies no seasonal model.

Error Model

displays the current settings of the autoregressive and moving-average terms, if any, for modeling the prediction error autocorrelation pattern in the series.

Set button

opens the Error Model Options window to enable you to set the autoregressive and moving-average terms for modeling the prediction error autocorrelation pattern in the series.

Intercept

specifies whether a mean or intercept parameter is included in the model. By default, the Intercept option is set to No when the model includes differencing and set to Yes when there is no differencing.

Predictors

is a list of the predictor effects included as inputs in the model.

OK

closes the Custom Model Specification window and fits the model.

Cancel

closes the Custom Model Specification window without fitting the model. Any options you specified are lost.

Reset

resets all options to their initial values upon entry to the Custom Model Specification window. This might be useful when editing an existing model specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

Add

opens a menu of types of predictors to add to the Predictors list. Select from the following:

Linear Trend

adds a Linear Trend item to the Predictors list.

Trend Curve

opens a menu of different time trend curves and adds the curve you select to the Predictors list.

Regressors

opens the Regressors Selection window to enable you to select other series in the input data set as regressors to predict the dependent series and add them to the Predictors list.

Adjustments

opens the Adjustments Selection window to enable you to select other series in the input data set for use as adjustments to the forecasts and add them to the Predictors list.

Dynamic Regressor

opens the Dynamic Regressor Selection window to enable you to select a series in the input data set as a predictor of the dependent series and also specify a transfer function model for the effect of the predictor series.

Interventions

opens the Interventions for Series window to enable you to define and select intervention effects and add them to the Predictors list.

Seasonal Dummies

adds a Seasonal Dummies predictor item to the Predictors list. This is unavailable if the series interval is not one which has a seasonal cycle.

Delete

deletes the selected (highlighted) entry from the Predictors list.

Edit

edits the selected (highlighted) entry in the Predictors list.

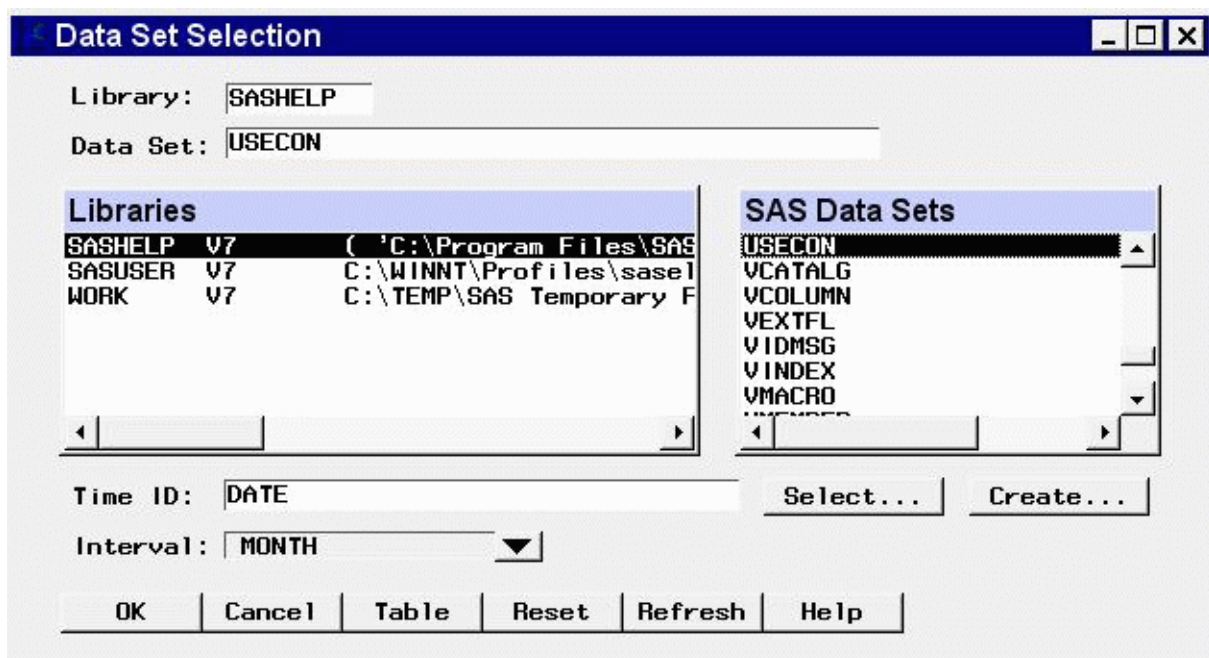
Mouse Button Actions

You can select or deselect entries in the Predictors list by clicking them. The selected (highlighted) predictor effect is acted on by the Delete and Edit buttons. Double-clicking on a predictor in the list invokes an appropriate edit action for that predictor.

If you right-click an entry in the Predictors list and press the right mouse button, the system displays a menu of actions that encompass the features of the Add, Delete, and Edit buttons.

Data Set Selection Window

Use this resizable window to select a data set to process by specifying a library and a SAS data set or view. These selections can be made by typing, by selecting from lists, or by a combination of the two. In addition, you can control the time ID variable and time interval, and you can browse the data set.



Access this window by using the Browse button to the right of the Data Set field in the Time Series Forecasting, Automatic Model Fitting, and Produce Forecasts windows. It functions in the same way as the Series Selection window, except that it does not allow you to select or view a time series variable.

Controls and Fields

Library

is a SAS libname assigned within the current SAS session. If you know the libname associated with the data set of interest, you can type it in this field. If it is a valid choice, it will appear in the libraries

list and will be highlighted. The SAS Data Sets list will be populated with data sets associated with that libname. See also Libraries under Selection Lists.

Data Set

is the name of a SAS data set (data file or data view) that resides under the selected libname. If you know the name, you can type it in and press Return. If it is a valid choice, it will appear in the SAS Data Sets list and will be highlighted.

Time ID

is the name of the ID variable for the selected input data set. To specify the ID variable, you can type the ID variable name in this field or select the control arrows to the right of the field.

Time ID `Select` button

opens the Time ID Variable Specification window.

Time ID `Create` button

opens a menu of methods for creating a time ID variable for the input data set. Use this feature if the data set does not already contain a valid time ID variable.

Interval

is the time interval between observations (data frequency) in the selected data set. If the interval is not automatically identified by the system, you can type in the interval name or select it from a list by clicking the combo box arrow. For more information about intervals, see Chapter 4, “[Date Intervals, Formats, and Functions](#),” in this book.

OK

closes the Data Set Selection window and makes the selected data set the current input data set.

Cancel

closes the window without applying any selections made.

Table

opens a Viewtable window for browsing the selected data set.

Reset

resets the fields to their initial values upon entry to the window.

Refresh

updates all fields and lists in the window. If you assign a new libname without exiting the Data Set Selection window, use the refresh action to update the Libraries list so that it will include the newly assigned libname.

Selection Lists

Libraries

displays a list of currently assigned libnames. You can select a libname by clicking it with the left mouse button, which is equivalent to typing its name in the Library field.

If you cannot locate the library or directory you are interested in, go to the SAS Explorer window, select “New” from the File menu, then select “Library” and “OK.” This opens the New Library window. You also assign a libname by submitting a libname statement from the Editor window. Select the Refresh button to make the new libname available in the libraries list.

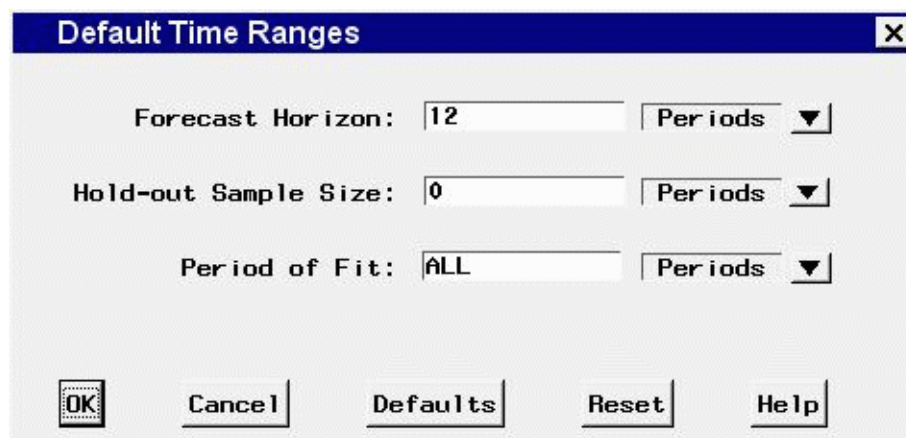
SAS Data Sets

displays a list of the SAS data sets (data files or data views) contained in the selected library. You can

select one of these by clicking with the left mouse button, which is equivalent to typing its name in the Data set field. You can double-click a data set name to select it and exit the window.

Default Time Ranges Window

Use the Default Time Ranges window to control how the period of fit and evaluation and the forecasting horizon are determined for each series when you do not explicitly set these ranges for a particular series. Invoke this window from the Options menu of the Develop Models, Automatic Model Fitting, Produce Forecasts, and Manage Forecasting Project windows. The settings you make in this window affect subsequently selected series; they do not alter the time ranges of series you have already selected.



Controls and Fields

Forecast Horizon

specifies the forecast horizon as either a number of periods or years from the last nonmissing data value or as a fixed date. You can type a number or date value in this field. Date value must be entered in a form recognized by a SAS date informat. (See *SAS Language Reference: Concepts* for information about SAS date informats.)

Forecast Horizon Units

indicates whether the value in the forecast horizon field represents periods or years or a date. Click the arrow and select one from the pop-up list.

Hold-out Sample Size

specifies that a number of observations, number of years, or percent of the data at the end of the data range be used for the period of evaluation with the remainder of data used as the period of fit.

Hold-out Sample Size Units

indicates whether the hold-out sample size represents periods or years or percent of data range.

Period of Fit

specifies how much of the data range for a series is to be used as the period of fit for models fit to the series. ALL indicates that all the available data is used. You can specify a number of periods, number

of years, or a fixed date, depending on the value of the units field to the right. When you specify a date, the start of the period of fit is the specified date or the first nonmissing series value, whichever is more recent. Date value must be entered in a form recognized by a SAS date informat. (See *SAS Language Reference: Concepts* for information about SAS date informats.) When you specify the number of periods or years, the start of the period of fit is computed as the date that number of periods or years from the end of the data.

Period of Fit Units

indicates whether the period-of-fit value represents periods or years or a date.

OK

closes the window and stores the specified changes.

Cancel

closes the window without saving changes. Any options you specified are lost.

Defaults

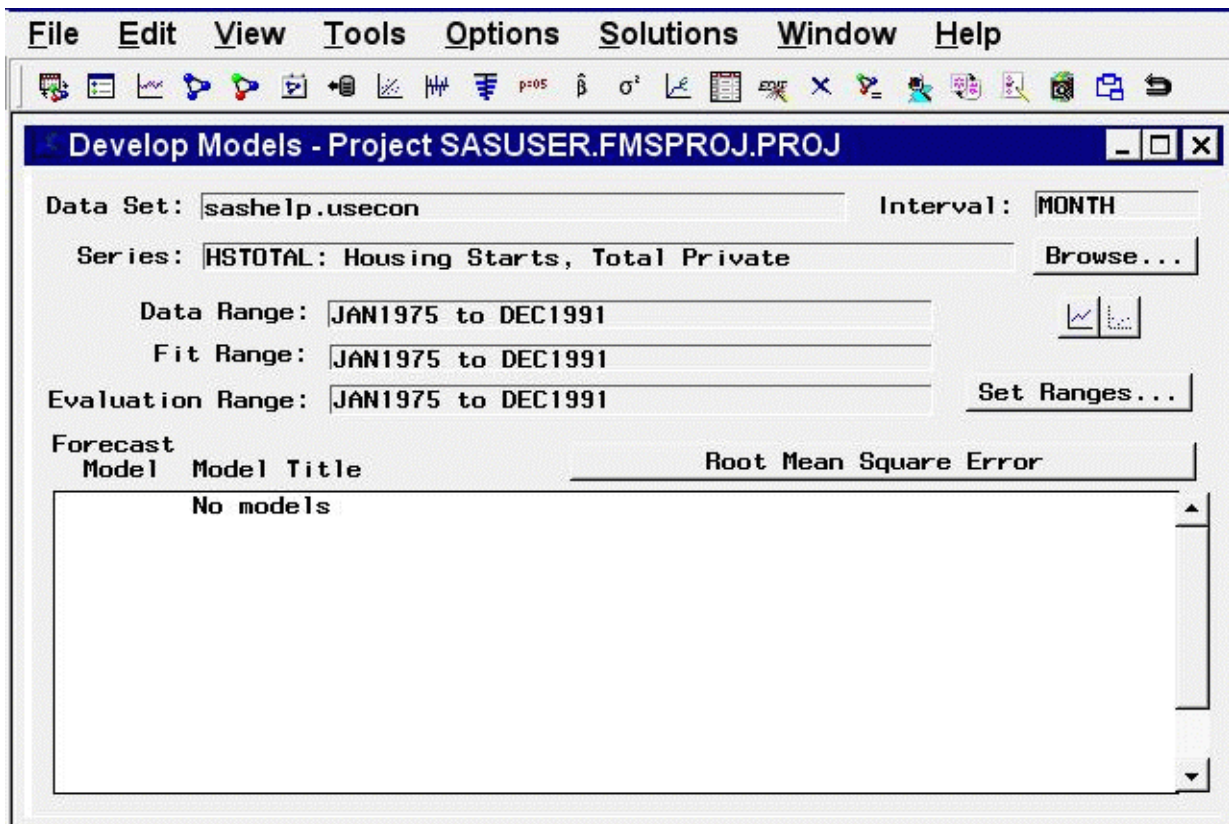
resets all options to their default values.

Reset

resets the options to their initial values upon entry to the window.

Develop Models Window

This resizable window provides access to all of the Forecasting System's interactive model fitting and graphical tools. Use it to fit forecasting models to an individual time series and choose the best model to use to produce the final forecasts of the series. Invoke this window by using the Develop Models button on the Time Series Forecasting window.



Controls and Fields

Data Set

is the name of the current input data set.

Interval

is the time interval (data frequency) for the input data set.

Series

is the variable name and label of the current time series.

Browse button

opens the Series Selection window to enable you to change the current input data set or series.

Data Range

is the date of the first and last nonmissing data values available for the current series in the input data set.

Fit Range

is the current period of fit setting. This is the range of data that will be used to fit models to the series.

Evaluation Range

is the current period of evaluation setting. This is the range of data that will be used to calculate the goodness-of-fit statistics for models fit to the series.

Set Ranges button

opens the Time Ranges Specification window to enable you to change the fit range or evaluation range. Note: A new fit range is applied when new models are fit or when existing models are refit. A new

evaluation range is applied when new models are fit or when existing models are refit or reevaluated. Changing the ranges does not automatically refit or reevaluate any models in the table: Use the Refit Models or Reevaluate Models items under the Edit menu.

View Series Graphically icon

opens the Time Series Viewer window to display plots of the current series.

View Selected Model Graphically icon

opens the Model Viewer to display graphs and tables for the currently highlighted model.

Forecast Model

is the column of the model table that contains check boxes to select which model is used to produce the final forecasts for the current series.

Model Title

is the column of the model table that contains the descriptive labels of the forecasting models fit to the current series.

Root Mean Square Error (or other statistic name) button

is the button above the right side of the table. It displays the name of the current model selection criterion: a statistic that measures how well each model in the table fits the values of the current series for observations within the evaluation range. Clicking this button opens the Model Selection Criterion window to let you to select a different statistic. When you select a statistic, the model table the Develop Models window is updated to show current values of that statistic.

Menu Bar

File

New Project

opens a dialog that lets you create a new project, assign it a name and description, and make it the active project.

Open Project

opens a dialog that lets you select and load a previously saved project.

Save Project

saves the current state of the system (including all the models fit to a series) to the current project catalog entry.

Save Project as

saves the current state of the system with a prompt for the name of the catalog entry in which to store the information.

Clear Project

clears the system, deleting all the models for all series.

Save Forecast

writes forecasts from the currently highlighted model to an output data set.

Save Forecast As

prompts for an output data set name and saves the forecasts from the currently highlighted model.

Output Forecast Data Set

opens a dialog for specifying the default data set used when you select “Save Forecast.”

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Setup

opens the Print Setup window, which enables you to access your operating system print setup.

Close

closes the Develop Models window and returns to the main window.

Edit**Fit Model****Automatic Fit**

invokes the automatic model selection process.

Select From List

opens the Models to Fit window.

Smoothing Model

opens the Smoothing Model Specification window.

ARIMA Model

opens the ARIMA Model Specification window.

Custom Model

opens the Custom Model Specification window.

Combine Forecasts

opens the Forecast Combination Model Specification window.

External Forecasts

opens the External Forecast Model Specification window.

Edit Model

enables you to modify the specification of the currently highlighted model in the table and fit the modified model. The new model replaces the current model in the table.

Delete Model

deletes the currently highlighted model from the model table.

Refit Models**All Models**

refits all models in the table by using data within the current fit range.

Selected Model

refits the currently highlighted model by using data within the current fit range.

Reevaluate Models

All Models

recomputes statistics of fit for all models in the table by using data within the current evaluation range.

Selected Model

recomputes statistics of fit for the currently highlighted model by using data within the current evaluation range.

View

Project

opens the Manage Forecasting Project window.

Data Set

opens a Viewtable window to display the current input data set.

Series

opens the Time Series Viewer window to display plots of the current series. This is the same as the View Series Graphically icon.

Model Predictions

opens the Model Viewer to display a predicted versus actual plot for the currently highlighted model. This is the same as the View Selected Model Graphically icon.

Prediction Errors

opens the Model Viewer to display the prediction errors for the currently highlighted model.

Prediction Error Autocorrelations

opens the Model Viewer to display the prediction error autocorrelations, partial autocorrelations, and inverse autocorrelations for the currently highlighted model.

Prediction Error Tests

opens the Model Viewer to display graphs of white noise and stationarity tests on the prediction errors of the currently highlighted model.

Parameter Estimates

opens the Model Viewer to display the parameter estimates table for the currently highlighted model.

Statistics of Fit

opens the Model Viewer window to display goodness-of-fit statistics for the currently highlighted model.

Forecast Graph

opens the Model Viewer to graph the forecasts for the currently highlighted model.

Forecast Table

opens the Model Viewer to display forecasts for the currently highlighted model in a table.

Tools

Diagnose Series

opens the Series Diagnostics window to determine the kinds of forecasting models appropriate for the current series.

Define Interventions

opens the Interventions for Series window to enable you to edit or add intervention effects for use in modeling the current series.

Sort Models

sorts the models in the table by the values of the currently displayed fit statistic.

Compare Models

opens the Model Fit Comparison window to display fit statistics for selected pairs of forecasting models. This is unavailable if there are fewer than two models in the table.

Generate Data

opens the Time Series Simulation window. This window enables you to simulate ARIMA time series processes and is useful for educational exercises or testing the system.

Options

Time Ranges

opens the Time Ranges Specification window to enable you to change the fit and evaluation time ranges and the forecast horizon. This action is the same as the Set Ranges button.

Default Time Ranges

opens the Default Time Ranges window to enable you to control how the system sets the time ranges for series when you do not explicitly set time ranges with the Time Ranges Specification window. Settings made by using this window do not affect series you are already working with; they take effect when you select a new series.

Model Selection List

opens the Model Selection List editor window. Use this action to edit the set of forecasting models considered by the automatic model selection process and displayed by the Models to Fit window.

Model Selection Criterion

opens the Model Selection Criterion window, which presents a list of goodness-of-fit statistics and enables you to select the fit statistic that is displayed in the table and used by the automatic model selection process to determine the best fitting model. This action is the same as clicking the button above the table which displays the name of the current model selection criterion.

Statistics of Fit

opens the Statistics of Fit Selection window, which presents a list of statistics that the system can display. Use this action to customize the list of statistics shown in the Model Viewer, Automatic Model Fitting Results, and Model Fit Comparison windows and available for selection in the Model Selection Criterion menu.

Forecast Options

opens the Forecast Options window, which enables you to control the widths of forecast con-

fidence limits and control the kind of predicted values computed for models that include series transformations.

Alignment of Dates

Beginning

aligns dates that the system generates to identify forecast observations in output data sets to the beginning of the time intervals.

Middle

aligns dates that the system generates to identify forecast observations in output data sets to the midpoints of the time intervals.

End

aligns dates that the system generates to identify forecast observations in output data sets to the end of the time intervals.

Automatic Fit

opens the Automatic Model Selection Options window, which enables you to control the number of models retained by the automatic model selection process and whether the models considered for automatic selection are subset according to the series diagnostics.

Include Interventions

controls whether intervention effects defined for the current series are automatically added as predictors to the models considered by the automatic selection process and displayed by the Models to Fit window. When the Include Interventions option is selected, the series interventions are also automatically added to the predictors list when you specify a model in the ARIMA and Custom Models Specification windows. A check mark or filled check box next to this item indicates that the option is turned on.

Print Audit Trail

prints to the SAS log information about the models fit by the system. A check mark or filled check box next to this item indicates that the audit option is turned on.

Show Source Statements

Controls whether SAS statements submitted by the forecasting system are printed in the SAS log. When the Show Source Statements option is selected, the system sets the SAS system option SOURCE before submitting SAS statements; otherwise, the system uses the NOSOURCE option. Note that only some of the functions performed by the forecasting system are accomplished by submitting SAS statements. A check mark or filled check box next to this item indicates that the option is turned on.

Left Mouse Button Actions for the Model Table

When the cursor is over the description of a model in the table, the left mouse button selects (highlights) or deselects that model. On some computer systems, you can double-click to open the Model Viewer window for the selected model.

When the cursor is over an empty part of the model table, the left mouse button opens a menu of model fitting choices. These choices are the same as those in the Fit Model submenu of the Edit menu.

Right Mouse Button Actions for the Model Table

When a model in the table is selected, the right mouse opens a menu of actions that apply to the highlighted model. The actions available in this menu are as follows.

View Model

opens the Model Viewer for the selected model. This action is the same as the View Model Graphically icon.

View Parameter Estimates

opens the Model Viewer to display the parameter estimates table for the currently highlighted model. This is the same as the Parameter Estimates item in the View menu.

View Statistics of Fit

opens the Model Viewer to display a table of goodness-of-fit statistics for the currently highlighted model. This is the same as the Statistics of Fit item in the View menu.

Edit Model

enables you to modify the specification of the currently highlighted model in the table and fit the modified model. This is the same as the Edit Model item in the Edit menu.

Refit Model

refits the highlighted model by using data within the current fit range. This is the same as the Selected Model item under the Refit Models submenu of the Edit menu.

Reevaluate Model

reevaluates the highlighted model by using data within the evaluation fit range. This is the same as the Selected Model item under the Reevaluate Models submenu of the Edit menu.

Delete Model

deletes the currently highlighted model from the model table. This is the same as the Delete Model item under the Edit menu.

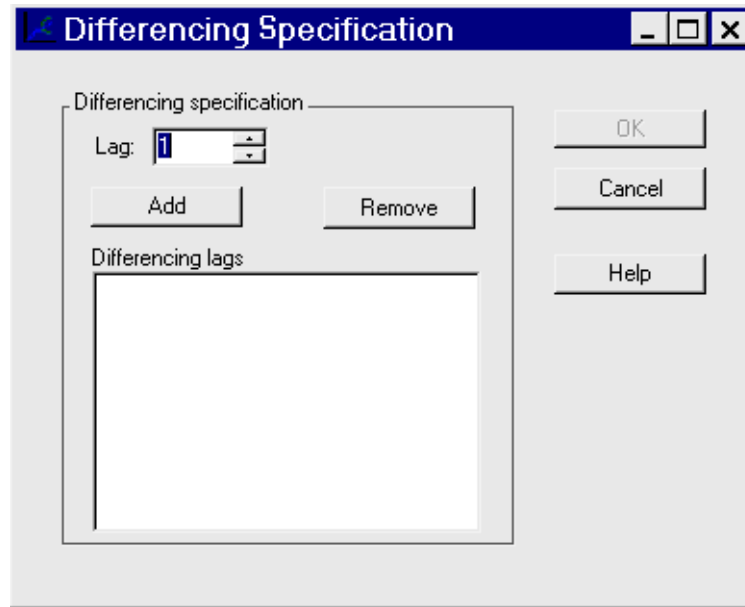
View Forecasts

opens the Model Viewer to display the forecasts for the currently highlighted model. This is the same as the Forecast Graph item under the View menu.

When the model list is empty or when no model is selected, the right mouse button opens the same menu of model fitting actions as the left mouse button.

Differencing Specification Window

Use the Differencing Specification window to specify the list of differencing lags $d=(lag, \dots, lag)$ in a factored ARIMA model. To specify a first difference, add the value 1 ($d=(1)$). To specify a second difference (difference twice at lag 1), add the value 1 again ($d=(1, 1)$). For first differencing at lags 1 and 12, use the values 1 and 12 ($d=(1, 12)$).



Controls and Fields

Lag

specifies a lag value to add to the list. Type in a positive integer or select one by clicking the spin box arrows. Duplicates are allowed.

Add

adds the value in the `Lag` spin box to the list of differencing lags.

Remove

deletes a selected lag from the list of differencing lags.

OK

closes the window and returns the specified list to the Factored ARIMA Model Specification window.

Cancel

closes the window and discards any lags added to the list.

Dynamic Regression Specification Window

Use the Dynamic Regression Specification window to specify a dynamic regression or transfer function model for the effect of the predictor variable. It is invoked from the Dynamic Regressors Selection window.

Dynamic Regression Specification

Series:

Input Model:

Input Transformations:

Transformation:

Lagging periods:

Order of Differencing:

Simple:

Seasonal:

Numerator Factors:

Simple Order:

Seasonal Order:

Denominator Factors:

Simple Order:

Seasonal Order:

Controls and Fields

Series

is the name and variable label of the current series.

Input Model

is a descriptive label for the dynamic regression model. You can type a label in this field or allow the system to provide the label. If you leave the label blank, a label is generated automatically based on the options you specify. When no options are specified, the label is the name and variable label of the predictor variable.

Input Transformation

displays the transformation specified for the predictor variable. When a transformation is specified, the transfer function model is fit to the transformed input variable.

Lagging periods

is the pure delay in the effect of the predictor, l .

Simple Order of Differencing

is the order of differencing, d . Set this field to 1 to use the changes in the predictor variable.

Seasonal Order of Differencing

is the order of seasonal differencing, D . Set this field to 1 to difference the predictor variable at the seasonal lags—for example, to use the year-over-year or week-over-week changes in the predictor variable.

Simple Order Numerator Factors

is the order of the numerator factor of the transfer function, p .

Seasonal Order Numerator Factors

is the order of the seasonal numerator factor of the transfer function, P .

Simple Order Denominator Factors

is the order of the denominator factor of the transfer function, q .

Seasonal Order Denominator Factors

is the order of the seasonal denominator factor of the transfer function, Q .

OK

closes the window and adds the dynamic regression model specified to the model predictors list.

Cancel

closes the window without adding the dynamic regression model. Any options you specified are lost.

Reset

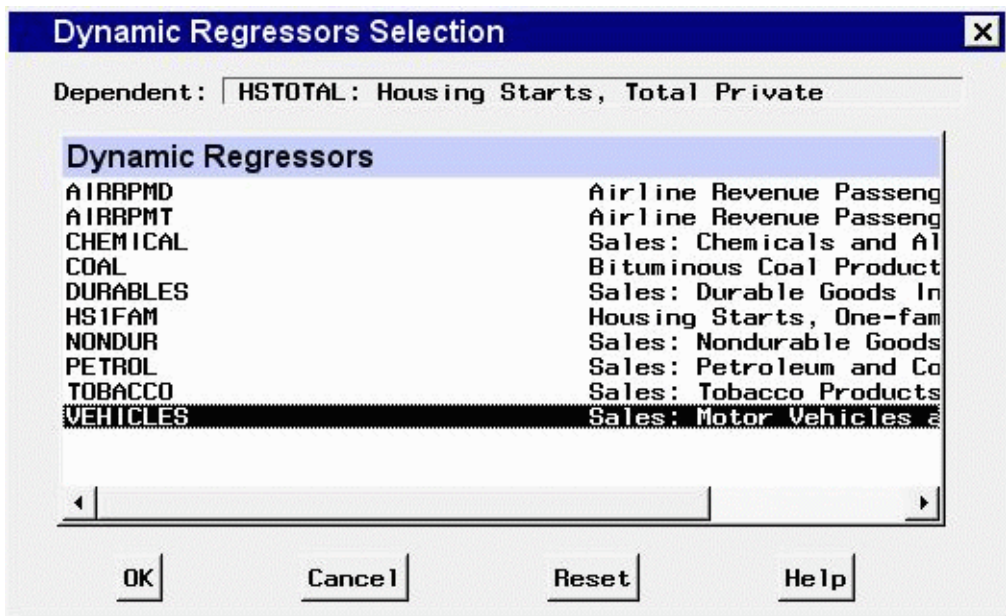
resets all options to their initial values upon entry to the window. This might be useful when editing a predictor specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

Dynamic Regressors Selection Window

Use the Dynamic Regressors Selection window to select an input variable as a dynamic regressor. Access this window from the pop-up menu which appears when you select the Add button of the ARIMA Model Specification window or Custom Model Specification window.



Controls and Fields

Dependent

is the name and variable label of the current series.

Dynamic Regressors

is a table listing the variables in the input data set. Select one variable in this list as the predictor series.

OK

opens the Dynamic Regression Specification window for you to specify the form of the dynamic regression for the selected predictor series, and then closes the Dynamic Regressors Selection window and adds the specified dynamic regression to the model predictors list.

Cancel

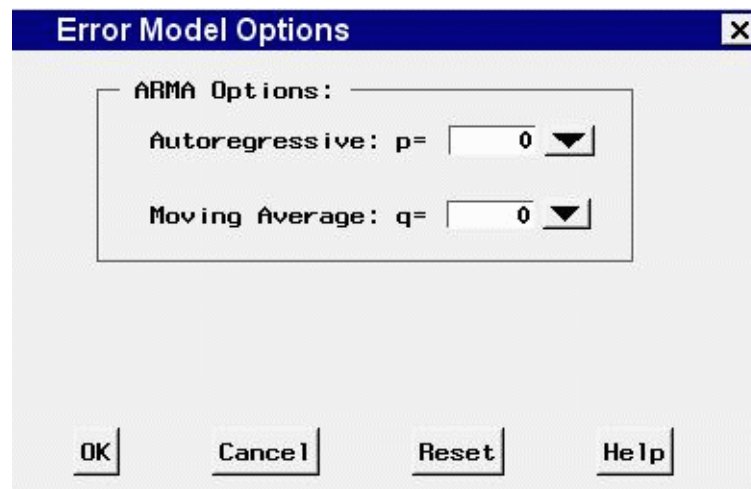
closes the window without adding the dynamic regression model. Any options you specified are lost.

Reset

resets all options to their initial values upon entry to the window.

Error Model Options Window

Use the Error Model Options window to specify the autoregressive and moving-average orders for the residual autocorrelation part of a model defined by using the Custom Model Specification window. Access it by using the Set button of that window.



Controls and Fields

ARIMA Options

Use these combo boxes to specify the orders of the ARIMA model. You can either type in a value or click the combo box arrow to select from a pop-up list.

Autoregressive

defines the order of the autoregressive part of the model.

Moving Average

defines the order of the moving-average term.

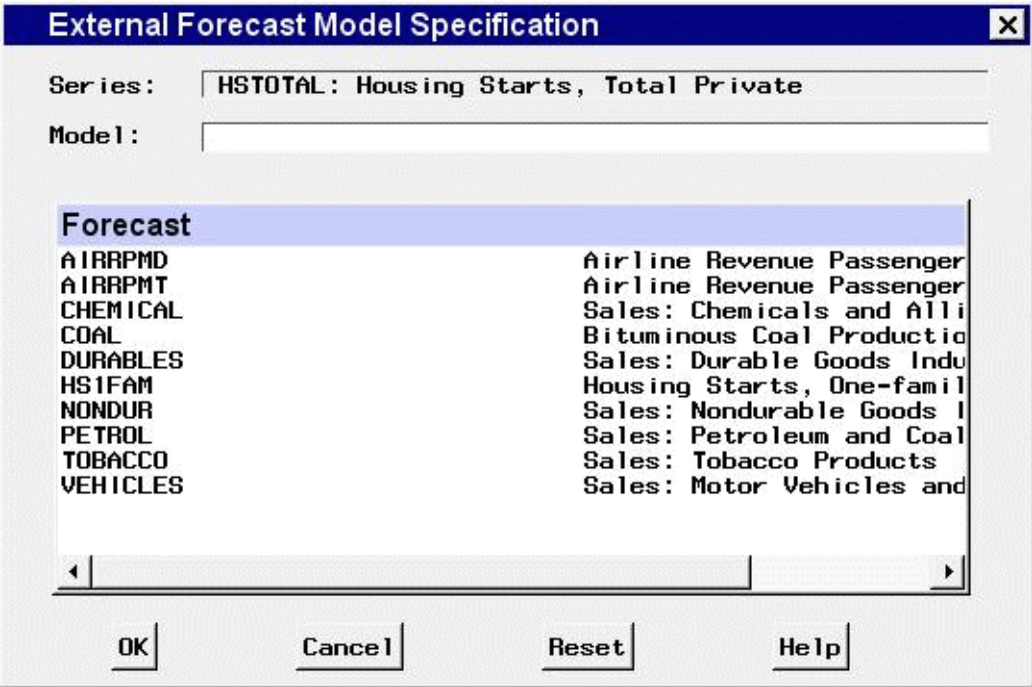
OK

closes the Error Model Options window and returns to the Custom Model Specification window.

- Cancel**
closes the Error Model Options window and returns to the Custom Model Specification window, discarding any changes made.
- Reset**
resets all options to their initial values upon entry to the window.

External Forecast Model Specification Window

Use the External Forecast Model Specification window to add to the current project forecasts produced externally to the Time Series Forecasting System. To add an external forecast, select a variable from the selection list and choose the OK button. The name of the selected variable will be added to the list of models fit, and the values of this variable will be used as the forecast. For more information, see “Incorporating Forecasts from Other Sources” in the “Specifying Forecasting Models” chapter.



Controls and Fields

- OK**
closes the window and adds the external forecast to the project.
- Cancel**
closes the window without adding an external forecast to the project.
- Reset**
deselects any selection made in the selection list.

Factored ARIMA Model Specification Window

Use the ARIMA Model Specification window to specify an ARIMA model by using the notation:

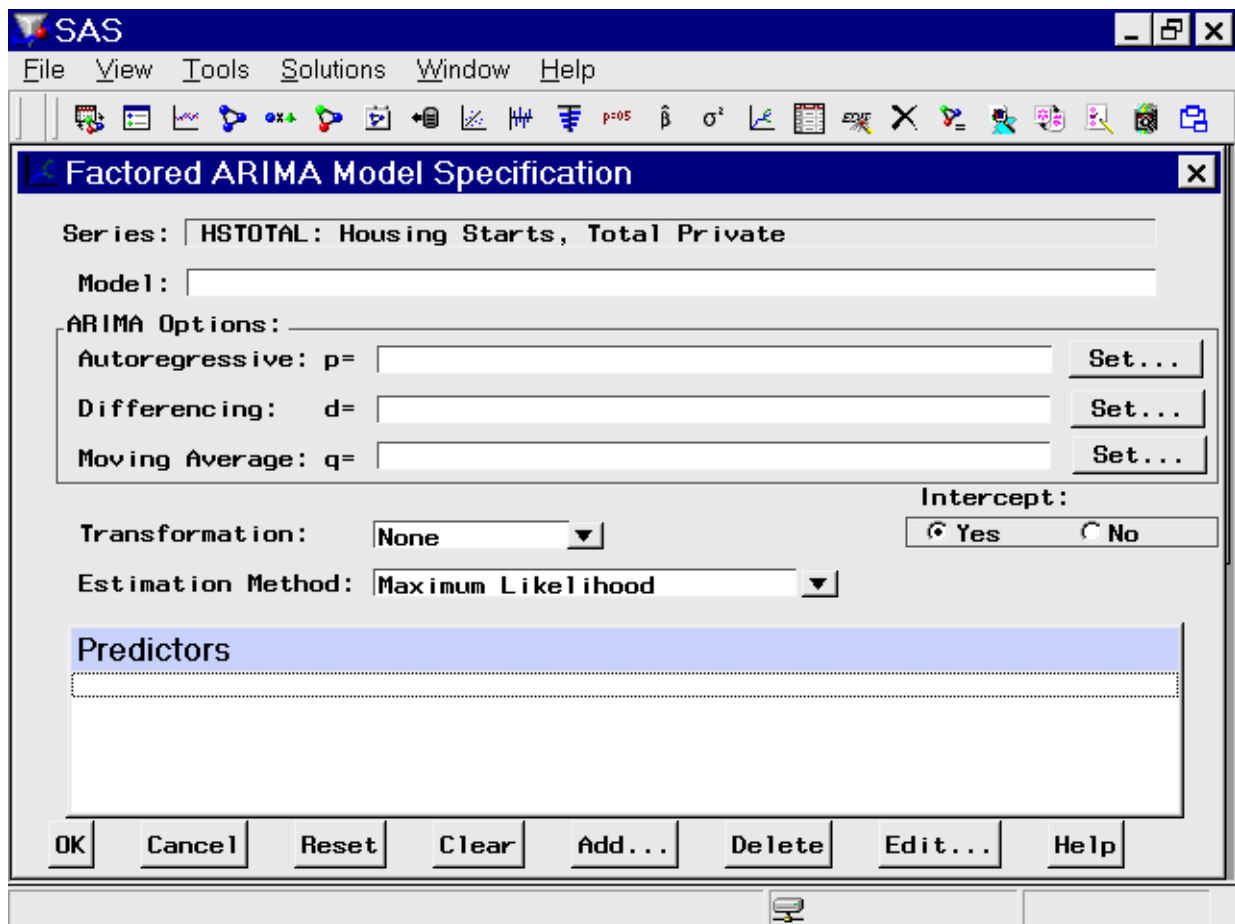
$$p = (\text{lag}, \dots, \text{lag}) \dots (\text{lag}, \dots, \text{lag})$$

$$d = (\text{lag}, \dots, \text{lag})$$

$$q = (\text{lag}, \dots, \text{lag}) \dots (\text{lag}, \dots, \text{lag})$$

where p , d , and q represent autoregressive, differencing, and moving-average terms, respectively.

Access it from the Develop Models menu, where it is invoked from the Fit Model item under Edit in the menu bar, or from the pop-up menu when you click an empty area of the model table.



The Factored ARIMA Model Specification window is identical to the ARIMA Model Specification window, except that the p , d , and q terms are specified in a more general and less limited way. Only those controls and fields that differ from the ARIMA Model Specification window are described here.

Controls and Fields

Model

is a descriptive label for the model. You can type a label in this field or allow the system to provide a label. If you leave the label blank, a label is generated automatically based on the p, d, and q terms that you specify. For example, if you specify $p=(1,2,3)$, $d=(1)$, $q=(12)$ and no intercept, the model label is `ARIMA p=(1,2,3) d=(1) q=(12) NOINT`. For monthly data, this is equivalent to the model `ARIMA(3,1,0)(0,0,1)s NOINT` as specified in the ARIMA Model Specification window or the Custom Model Specification window.

ARIMA Options

Specifies the ARIMA model in terms of the autoregressive lags (p), differencing lags (d), and moving-average lags (q).

Autoregressive

defines the autoregressive part of the model. Select the Set button to open the AR Polynomial Specification window, where you can add any set of autoregressive lags grouped into any number of factors.

Differencing

specifies differencing to be applied to the input data. Select the Set button to open the Differencing Specification window, where you can specify any set of differencing lags.

Moving Average

defines the moving-average part of the model. Select the Set button to open the MA Polynomial Specification window, where you can add any set of moving-average lags grouped into any number of factors.

Estimation Method

specifies the method used to estimate the model parameters. The Conditional Least Squares and Unconditional Least Squares methods generally require fewer computing resources and are more likely to succeed in fitting complex models. The Maximum Likelihood method requires more resources but provides a better fit in some cases. See also Estimation Details in Chapter 7, “[The ARIMA Procedure](#).”

Forecast Combination Model Specification Window

Use the Forecast Combination Model Specification window to produce forecasts by averaging the forecasts of two or more forecasting models. The specified combination of models is added to the model list for the series. Access this window from the Develop Models window whenever two or more models have been fit to the current series. It is invoked by selecting Combine Forecasts from the Fit Model submenu of the Edit menu, or from the pop-up menu which appears when you click an empty part of the model table.

Forecast Combination Model Specification

Series:

Model:

Weight	Model Description	Root Mean Square Error
.	Linear Trend	37.01371
.	Linear Trend with Autoregressive Errors	14.13055

Controls and Fields

Series

is the name and variable label of the current series.

Model

is a descriptive label for the model that you specify. You can type a label in this field or allow the system to provide a label. If you leave the label blank, a label is generated automatically based on the options you specify.

Weight

is a column of the forecasting model table that contains the weight values for each model. The forecasts for the combined model are computed as a weighted average of the predictions from the models in the table that use these weights. Models with missing weight values are not included in the forecast combination. You can type weight values in these fields or you can use other features of the window to set the weights.

Model Description

is a column of the forecasting model table that contains the descriptive labels of the forecasting models fit to the current series that are available for combination.

Root Mean Square Error (or other statistic name) button

is the button above the right side of the table. It displays the name of the current model selection criterion: a statistic that measures how well each model in the table fits the values of the current series for observations within the evaluation range. Clicking this button opens the Model Selection Criterion window to enable you to select a different statistic.

Normalize Weights button

replaces each nonmissing value in the Weights column with the current value divided by the sum of the weights. The resulting weights are proportional to original weights and sum to 1.

Fit Regression Weights button

computes weight values for the models in the table by regressing the series on the predictions from the models. The values in the Weights column are replaced by the estimated coefficients produced by this linear regression. If some weight values are nonmissing and some are missing, only models with nonmissing weight values are included in the regression. If all weights are missing, all models are used.

OK

closes the Forecast Combination Model Specification window and fits the model.

Cancel

closes the Forecast Combination Model Specification window without fitting the model. Any options you specified are lost.

Reset

resets all options to their initial values upon entry to the Forecast Combination Model Specification window. This might be useful when editing an existing model specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

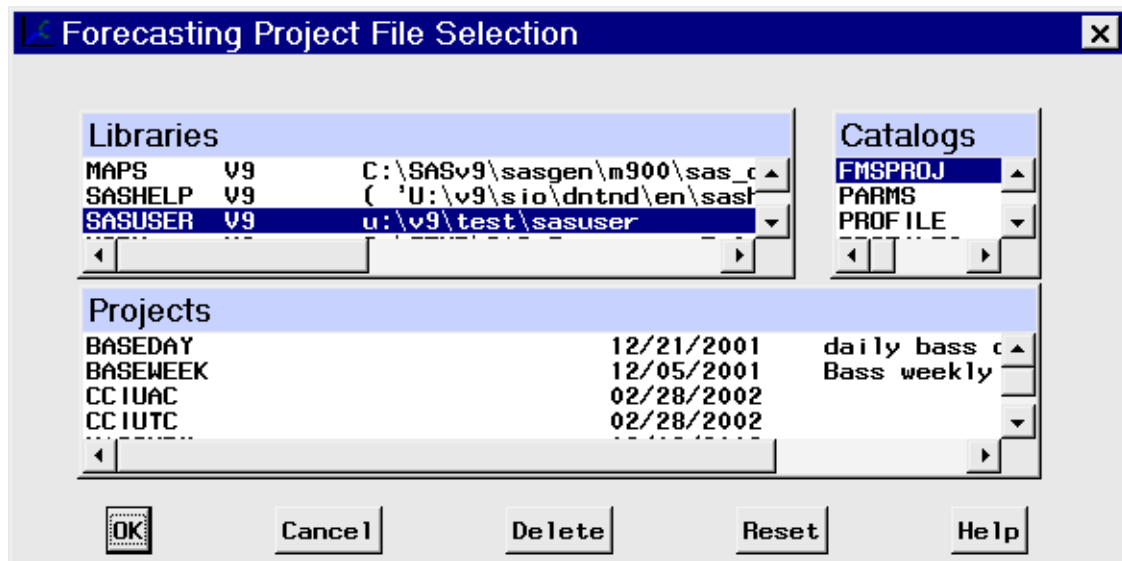
Mouse Button Actions

You can select or deselect models for inclusion in the combination model by positioning the mouse cursor over the model description and pressing the left mouse button. When you select a model in this way, the weights are automatically updated.

The newly selected model is given a weight equal to the average weight of the previously selected models, and all the nonmissing weights are normalized to sum to 1. When you use the mouse to remove a model from the combination, the weight of the deselected model is set to missing and the remaining nonmissing weights are normalized to sum to 1.

Forecasting Project File Selection Window

Use the Forecasting Project File Selection window to locate and load a previously stored forecasting project. Access it from the project Browse button of the Manage Forecasting Project window or the Time Series Forecasting window or from the Open Project item under the File menu of the Develop Models window.



Selection Lists

Libraries

is a list of currently assigned libraries. When you select a library from this list, the catalogs in that library are shown in the catalog selection list.

Catalogs

is a list of catalogs contained in the currently selected library. When you select a catalog from this list, any forecasting project entries stored in that catalog are shown in the projects selection list.

Projects

is a list of forecasting project entries contained in the currently selected catalog.

Controls and Fields

OK

closes the window and opens the selected project.

Cancel

closes the window without selecting a project.

Delete

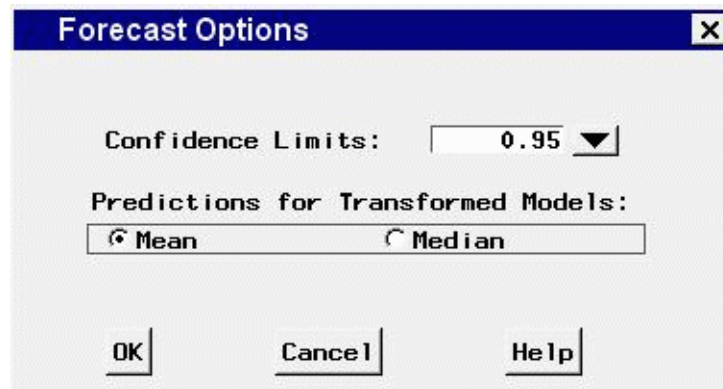
deletes the selected project file.

Reset

restores selections to those which were set before the window was opened.

Forecast Options Window

Use the Forecast Options window to set options to control how forecasts and confidence limits are computed. It is available from the Forecast Options item in the Options menu of the Develop Models window, Automatic Model Fitting window, Produce Forecasts, and Manage Projects windows.



Controls and Fields

Confidence Limits

specifies the size of the confidence limits for the forecast values. For example, a value of 0.95 specifies 95% confidence intervals. You can type in a number or select from the pop-up list.

Predictions for transformed models

controls how forecast values are computed for models that employ a series transformation. See the section [Predictions for Transformed Models](#) in Chapter 50, “Forecasting Process Details,” for more information. The values are as follows.

Mean

specifies that forecast values be predictions of the conditional mean of the series.

Median

specifies that forecast values be predictions of the conditional median of the series.

OK

closes the window and saves the option settings you specified.

Cancel

closes the window without changing the forecast options. Any options you specified are lost.

Intervention Specification Window

Use the Intervention Specification window to specify intervention effects to model the impact on the series of unusual events. Access it from the Intervention for Series window. For more information, see the section “Interventions” on page 2968.

Intervention Specification

Series:

Label:

Intervention Specification:

Date:

Type of Intervention:

☒ Point ☐ Step ☐ Ramp

Effect Time Window:

Number of lags: ▼

Effect Decay Pattern:

☒ None ☐ Exp ☐ Wave

DATE	HSTOTAL
JAN75	56.1000
FEB75	54.7000
MAR75	80.2000
APR75	97.9000
MAY75	116.1000
JUN75	110.3000
JUL75	119.3000
AUG75	117.3000
SEP75	111.9000
OCT75	123.6000
NOV75	96.9000

OK Cancel Reset Clear Help

Controls and Fields

Series

is the name and variable label of the current series.

Label

is a descriptive label for the intervention effect that you specify. You can type a label in this field or allow the system to provide the label. If you leave the label blank, a label is generated automatically based on the options you specify.

Date

is the date that the intervention occurs. You can type a date value in this field, or you can set the date by selecting a row of the data table on the right side of the window.

Type of Intervention

Point

specifies that the intervention variable is zero except for the specified date.

Step

specifies that the intervention variable is zero before the specified date and a constant 1.0 after the date.

Ramp

specifies that the intervention variable is an increasing linear function of time after the date of the intervention and zero before the intervention date.

Number of lags

specifies the numerator order for the transfer function model for the intervention effect. Select a value from the pop-up list.

Effect Decay Pattern

specifies the denominator order for the transfer function model for the intervention effect. The value “Exp” specifies a single lag denominator factor; the value “Wave” specifies a two-lag denominator factor.

OK

closes the window and adds the intervention effect specified to the series interventions list.

Cancel

closes the window without adding the intervention. Any options you specified are lost.

Reset

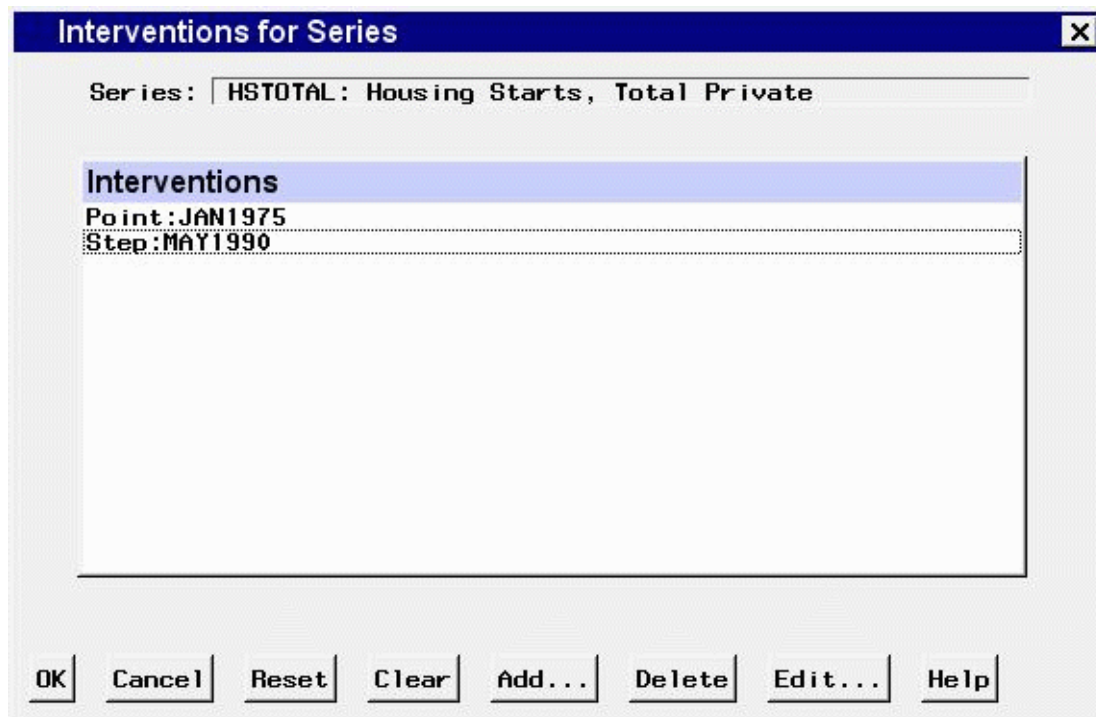
resets all options to their initial values upon entry to the window. This might be useful when editing an intervention specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

Interventions for Series Window

Use the Interventions for Series window to create and edit a list of intervention effects to model the impact on the series of unusual events and to select intervention effects as predictors for forecasting models. Access it from the Add button pop-up menu of the ARIMA Model Specification or Custom Model Specification window, or by selecting Define Interventions from the Tools in the Develop Models window. For more information, see the section “[Interventions](#)” on page 2968.



Controls and Fields

Series

is the name and variable label of the current series.

OK

closes the window. If you access this window from the ARIMA Model Specification window or the Custom Model Specification window, any interventions that are selected (highlighted) in the list are added to the model. If you access this window from the Tools menu, all interventions in the list are saved for the current series.

Cancel

closes the window without returning a selection or changing the interventions list. Any options you specified are lost.

Reset

resets the list as it was on entry to the window.

Clear

deletes all interventions from the list.

Add

opens the Intervention Specification window to specify a new intervention effect and add it to the list.

Delete

deletes the currently selected (highlighted) entries from the list.

Edit

opens the Intervention Specification window to edit the currently selected (highlighted) intervention.

Mouse Button Actions

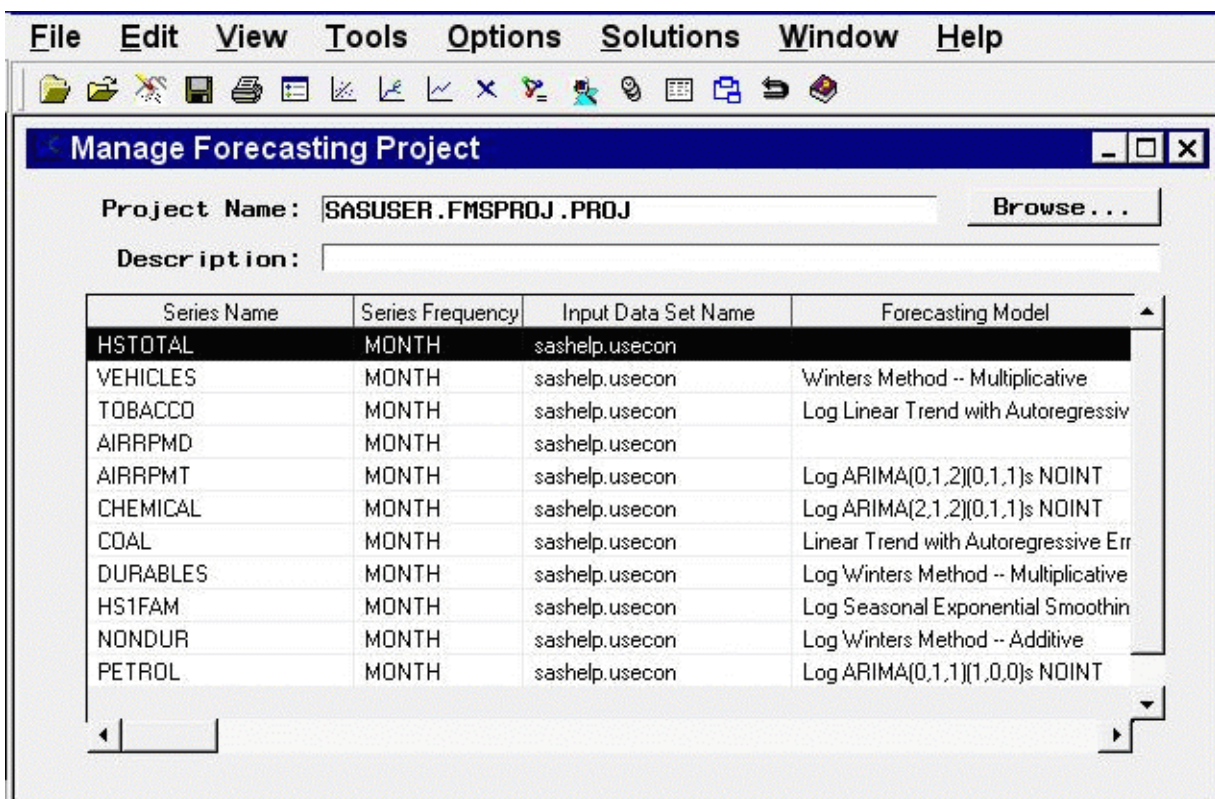
To select or deselect interventions, position the mouse cursor over the intervention's label in the Interventions list and press the left mouse button.

When you position the mouse cursor in the Interventions list and press the right mouse button, a menu containing the actions Add, Delete, and Edit appears. These actions are the same as the Add, Delete, and Edit buttons.

Double-clicking on an intervention in the list invokes an Edit action for that intervention specification.

Manage Forecasting Project Window

Use this resizable window to work with collections of series, models, and options called *projects*. The window contains a project name, a description field, and a table of information about all the series for which you have fit forecasting models. Access it by using the Manage Projects button on the Time Series Forecasting window.



Controls and Fields

Project Name

is the name of the SAS catalog entry in which forecasting models and other results will be stored and from which previously stored results are loaded into the forecasting system. You can specify the project by typing a SAS catalog entry name in this field or by selecting the Browse button to the right of this field. If you specify the name of an existing catalog entry, the information in the project file is loaded. If you specify a one-level name, it is assumed to be the name of a project in the “fmsproj” catalog in the “sasuser” library. For example, typing `samproj` is equivalent to typing `sasuser.fmsproj.samproj`.

project Browse button

opens the Forecasting Project File Selection window to enable you to select and load the project from a list of previously stored project files.

Description

is a descriptive label for the forecasting project. The description you type in this field will be stored with the catalog entry shown in the Project field if you save the project.

Series List Table

The table of series for which forecasting models have been fit contains the following columns.

Series Name

is the name of the time series variable represented in the given row of the table.

Series Frequency

is the time interval (data frequency) for the time series.

Input Data Set Name

is the input data set that provided the data for the series.

Forecasting Model

is the descriptive label for the forecasting model selected for the series.

Statistic Name

is the statistic of fit for the forecasting model selected for the series.

Number of Models

is the total number of forecasting models fit to the series. If there is more than one model for a series, use the Model List window to see a list of models.

Series Label

is the variable label for the series.

Time ID Variable Name

is the time ID variable for the input data set for the series.

Series Data Range

is the time range of the nonmissing values of the series.

Model Fit Range

is the period of fit used for the series.

Model Evaluation Range

is the evaluation period used for the series.

Forecast Range

is the forecast period set for the series.

Menu Bar

File

New

opens a dialog which lets you create a new project, assign it a name and description, and make it the active project.

Open

opens a dialog that lets you select and load a previously saved project.

Close

closes the Manage Forecasting Project window and returns to the main window.

Save

saves the current state of the system (including all the models fit to a series) to the current project catalog entry.

Save As

saves the current state of the system with a prompt for the name of the catalog entry in which to store the information.

Save to Data Set

saves the current project file information in a SAS data set. The contents of the data set are the same as the information displayed in the series list table.

Delete

deletes the current project file.

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print

prints the current project file information.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Edit

Delete Series

deletes all models for the selected (highlighted) row of the table and removes the series from the project.

Clear

resets the system, deleting all series and models from the project.

Reset

restores the Manage Forecasting Project window to its initial state.

View

Data Set

opens a Viewtable window to display the input data set for the selected (highlighted) series.

Series

opens the Time Series Viewer window to display plots of the selected (highlighted) series.

Model

opens the Model Viewer window to show the current forecasting model for the selected series.

Forecast

opens the Model Viewer to display plots of the forecasts produced by the forecasting model for the selected (highlighted) series.

Tools

Diagnose Series

opens the Series Diagnostics window to perform the automatic series diagnostic process to determine the kinds of forecasting models appropriate for the selected (highlighted) series.

List Models

opens the Model List window for the selected (highlighted) series, which displays a list of all the models that you fit for the series. This action is the same as double-clicking the mouse on the table row.

Generate Data

opens the Time Series Simulation window. This window enables you to simulate ARIMA time series processes and is useful for educational exercises or testing the system.

Refit Models

All Series

refits all the models for all the series in the project by using data within the current fit range.

Selected Series

refits all the models for the currently highlighted series by using data within the current fit range.

Reevaluate Models

All Series

reevaluates all the models for all the series in the project by using data within the current evaluation fit range.

Selected Series

reevaluates all the models for the currently highlighted series by using data within the current evaluation range.

Options

Time Ranges

opens the Time Ranges Specification window to enable you to change the fit and evaluation time ranges and the forecast horizon.

Default Time Ranges

opens the Default Time Ranges window to enable you to control how the system sets the time ranges for series when you do not explicitly set time ranges with the Time Ranges Specification window. Settings made by using this window do not affect series you are already working with; they take effect when you select a new series.

Model Selection List

opens the Model Selection List editor window. Use this to edit the set of forecasting models considered by the automatic model selection process and displayed by the Models to Fit window.

Statistics of Fit

opens the Statistics of Fit Selection window, which controls which of the available statistics will be displayed.

Forecast Options

opens the Forecast Options window, which enables you to control the widths of forecast confidence limits and control the kind of predicted values computed for models that include series transformations.

Column Labels

enables you to set long or short column labels. Long labels are used by default.

Include Interventions

controls whether intervention effects defined for the current series are automatically added as predictors to the models considered by the automatic selection process and displayed by the Model Selection List editor window. When the Include Interventions option is selected, the series interventions are also automatically added to the predictors list when you specify a model in the ARIMA and Custom Models Specification windows.

Print Audit Trail

prints to the SAS log information about the models fit by the system. A check mark or filled check box next to this item indicates that the audit option is turned on.

Show Source Statements

controls whether SAS statements submitted by the forecasting system are printed in the SAS log. When the Show Source Statements option is selected, the system sets the SAS system option SOURCE before submitting SAS statements; otherwise, the system uses the NOSOURCE

option. Note that only some of the functions performed by the forecasting system are accomplished by submitting SAS statements. A check mark or filled check box next to this item indicates that the option is turned on.

Left Mouse Button Actions

If you select a series in the table by positioning the cursor over the table row and clicking with the left mouse button once, that row of the table is highlighted. Menu bar actions such as Delete Series will apply to the highlighted row of the table.

If you select a series in the table by positioning the cursor over the table row and double-clicking with the left mouse button, the system opens the Model List window for that series, which displays a list of all the models that you fit for the series. This is the same as the List Models action under Tools in the menu bar.

Right Mouse Button Actions

Clicking the right mouse button invokes a pop-up menu of actions applicable to the highlighted series. The actions in this menu are as follows.

Delete Series

deletes the highlighted series and its models from the project. This is the same as Delete Series in the Edit menu.

Refit All Models

refits all models attached to the highlighted series by using data within the current fit range. This is the same as the Selected Series item under Refit Models in the Tools menu.

Reevaluate All Models

reevaluates all models attached to the highlighted series by using data within the current evaluation range. This is the same as the Selected Series item under Reevaluate Models in the Tools menu.

List Models

invokes the Model List window. This is the same as List Models under the Tools menu.

View Series

opens the Time Series Viewer window to display plots of the highlighted series. This is the same as the Series item under the View menu.

View Forecasting Model

invokes the Model Viewer window to display the forecasting model for the highlighted series. This is the same as the Model item under the View menu.

View Forecast

opens the Model Viewer window to display the forecasts for the highlighted series. This is the same as the Forecast item under the View menu.

Refresh

updates information shown in the Manage Forecasting Project window.

Model Fit Comparison Window

Use the Model Fit Comparison window to compare goodness-of-fit statistics for any two models fit to the current series. Access it from the Tools menu of the Develop Models window and the Automatic Model Fitting Results window whenever two or more models have been fit to the series.

The screenshot shows the 'Model Fit Comparison' window with the following settings and data:

Series: HSTOTAL: Housing Starts, Total Private
 Range: JAN1975 to DEC1991
 Model 1: ▲ Linear Trend ▼
 Model 2: ▲ Linear Trend with Autoregressive Errors ▼

Statistic	Model 1	Model 2
Mean Square Error	1370.0	199.67245
Root Mean Square Error	37.01371	14.13055
Mean Absolute Percent Error	28.95517	9.76610
Mean Absolute Error	31.39690	10.90707
R-Square	0.031	0.859

Buttons at the bottom: Close, Save..., Print, Statistics..., Help

Controls and Fields

Series

identifies the current time series variable.

Range

displays the starting and ending dates of the series data range.

Model 1

shows the model currently identified as Model 1.

Model 1 upward arrow button

enables you to change the model identified as Model 1 if it is not already the first model in the list of models associated with the series. Select this button to cycle upward through the list of models.

Model 1 downward arrow button

enables you to change the model identified as Model 1 if it is not already the last model in the list of models. Select this button to cycle downward through the list of models.

Model 2

shows the model currently identified as Model 2.

Model 2 upward arrow button

enables you to change the model identified as Model 2 if it is not already the first model in the list of models associated with the series. Select this button to cycle upward through the list of models.

Model 2 downward arrow button

enables you to change the model identified as Model 2 if it is not already the last model in the list of models. Select this button to cycle downward through the list of models.

Close

closes the Model Fit Comparison window.

Save

opens a dialog for specifying the name and label of a SAS data set to which the statistics will be saved. The data set will contain all available statistics and their values for Model 1 and Model 2, as well as a flag variable that is set to 1 for those statistics that were displayed.

Print

prints the contents of the table to the SAS Output window. If you find that the contents do not appear immediately in the Output window, you need to set scrolling options. Select “Preferences” under the Options submenu of the Tools menu. In the Preferences window, select the Advanced tab, then set output scroll lines to a number greater than zero.

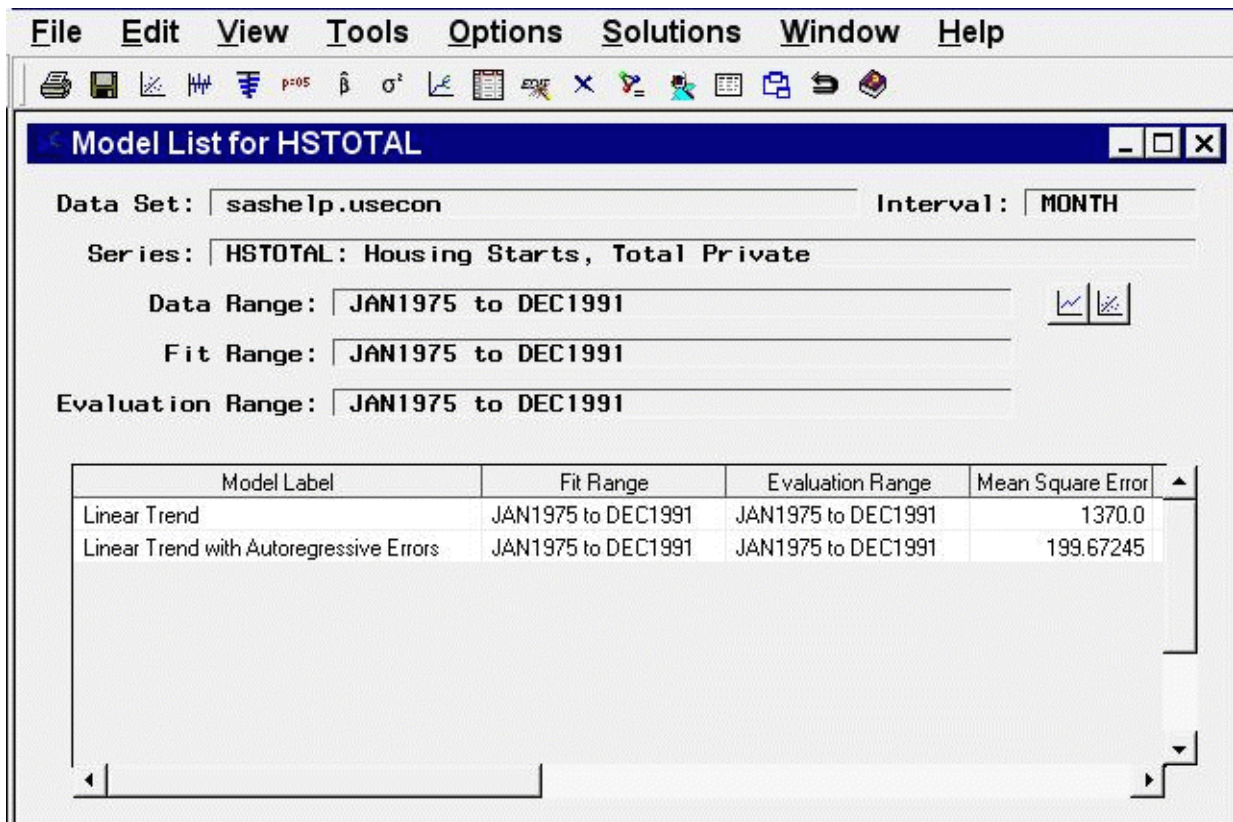
If you want to route the contents to a printer, go to the Output window and select “Print” from the File menu.

Statistics

opens the Statistics of Fit Selection window for controlling which statistics are displayed.

Model List Window

This resizable window shows all of the models that have been fit to a particular series in a project. Access it from the Manage Forecasting Project window by selecting a series in the series list table and choosing “List Models” from the Tools menu or by double-clicking the series.



Controls and Fields

Data Set

is the name of the current input data set.

Interval

is the time interval (data frequency) for the input data set.

Series

is the variable name and label of the current time series.

Data Range

is the date of the first and last nonmissing data values available for the current series in the input data set.

Fit Range

is the current period of fit setting. This is the range of data that will be used to fit models to the series. It might be different from the fit ranges shown in the table, which were in effect when the models were fit.

Evaluation Range

is the current period of evaluation setting. This is the range of data that will be used to calculate the goodness-of-fit statistics for models fit to the series. It might be different from the evaluation ranges shown in the table, which were in effect when the models were fit.

View Series Graphically icon

opens the Time Series Viewer window to display plots of the current series.

View Model Graphically icon

opens the Model Viewer to display graphs and tables for the currently highlighted model.

Model List Table

The table of models fit to the series contains columns that show the model label, the fit range and evaluation range used to fit the models, and all of the currently selected fit statistics. You can change the selection of fit statistics by using the Statistics of Fit Selection window.

Click on column headings to sort the table by a particular column. If a model is highlighted, clicking with the right mouse button invokes a pop-up menu that provides actions applicable to the highlighted model. It includes the following items.

View Model

opens the Model Viewer on the selected model. This is the same as “Model Predictions” under the View menu.

View Parameter Estimates

opens the Model Viewer to display the parameter estimates table for the currently highlighted model. This is the same as “Parameter Estimates” under the View menu.

View Statistics of Fit

opens the Model Viewer to display the statistics of fit table for the currently highlighted model. This is the same as “Statistics of Fit” under the View menu.

Edit Model

opens the appropriate model specification window for changing the attributes of the highlighted model and fitting the modified model.

Refit Model

refits the highlighted model using the current fit range.

Reevaluate Model

reevaluates the highlighted model using the current evaluation range.

Delete Model

deletes the highlighted model from the project.

View Forecasts

opens the Model Viewer to show the forecasts for the highlighted model. This is the same as “Forecast Graph” under the View menu.

Menu Bar

File

Save

opens a dialog which lets you save the contents of the table to a specified SAS data set.

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use

to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print

sends the contents of the table to a printer as defined through Print Setup.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Close

closes the window and returns to the Manage Forecasting Projects window.

Edit

Edit Model

enables you to modify the specification of the currently highlighted model in the table and fit the modified model. The new model replaces the current model in the table.

Refit Model

refits the currently highlighted model using data within the current fit range.

Reevaluate Model

recomputes statistics of fit for the currently highlighted model using data within the current evaluation range.

Delete Model

deletes the currently highlighted model from the model table.

Reset

restores the contents of the Model List window to the state initially displayed.

View

Series

opens the Time Series Viewer window to display plots of the current series. This is the same as the View Series Graphically icon.

Model Predictions

opens the Model Viewer to display a predicted and actual plot for the currently highlighted model. This is the same as the View Model Graphically icon.

Prediction Errors

opens the Model Viewer to display the prediction errors for the currently highlighted model.

Prediction Error Autocorrelations

opens the Model Viewer to display the prediction error autocorrelations, partial autocorrelations, and inverse autocorrelations for the currently highlighted model.

Prediction Error Tests

opens the Model Viewer to display graphs of white noise and stationarity tests on the prediction errors of the currently highlighted model.

Parameter Estimates

opens the Model Viewer to display the parameter estimates table for the currently highlighted model.

Statistics of Fit

opens the Model Viewer window to display goodness-of-fit statistics for the currently highlighted model.

Forecast Graph

opens the Model Viewer to graph the forecasts for the currently highlighted model.

Forecast Table

opens the Model Viewer to display forecasts for the currently highlighted model in a table.

Options**Statistics of Fit**

opens the Statistics of Fit Selection window, which presents a list of statistics that the system can display. Use this action to customize the list of statistics shown in the Model Viewer, Automatic Model Fitting Results, and Model Fit Comparison windows and available for selection in the Model Selection Criterion menu.

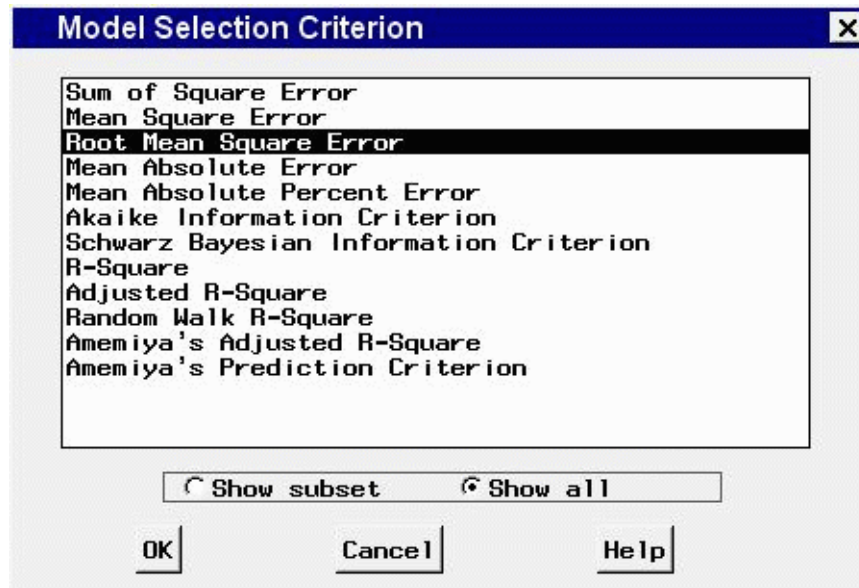
Column Labels

enables you to set long or short column labels. Long labels are used by default.

Model Selection Criterion Window

Use the Model Selection Criterion window to select the model selection criterion statistic used by the automatic selection process to determine the best fitting forecasting model. Model selection criterion statistics are a subset of those shown in the Statistics of Fit Selection window, since some statistics of fit, such as number of observations, are not useful for model selection.

This window is available from the Model Selection Criterion item of the Options menu of the Develop Models window, Automatic Model Fitting window, and Produce Forecasts window.



Controls and Fields

Show subset

when selected, lists only those model selection criterion statistics that are selected in the Statistics of Fit Selection window.

Show all

when selected, lists all available model selection criterion statistics.

OK

closes the window and sets the model selection criterion to the statistic you specified.

Cancel

closes the window without changing the model selection criterion.

Model Selection List Editor Window

Use the Model Selection List Editor window to edit the model selection list, including adding your own custom models, and to specify which models in the list are to be used in the automatic fitting process. Access it from the Options menu in the Develop Models, Automatic Model Fitting window, Produce Forecasts, and Manage Projects windows.

The window initially displays the current model list for your project. You can modify this set of models in several ways:

- Open one or more alternate model lists to replace or append to the current model list. These can be either model lists included with the software or model lists previously saved by you or other users.

- Turn the autofit option on or off for individual models. Those that are not flagged for autofit will be available by using the Models to Fit window but not by using automatic model fitting.
- Delete models from the list that are not needed for your project.
- Reorder the models in the list.
- Edit models in the list.
- Create a new empty list.
- Add new models to the list.

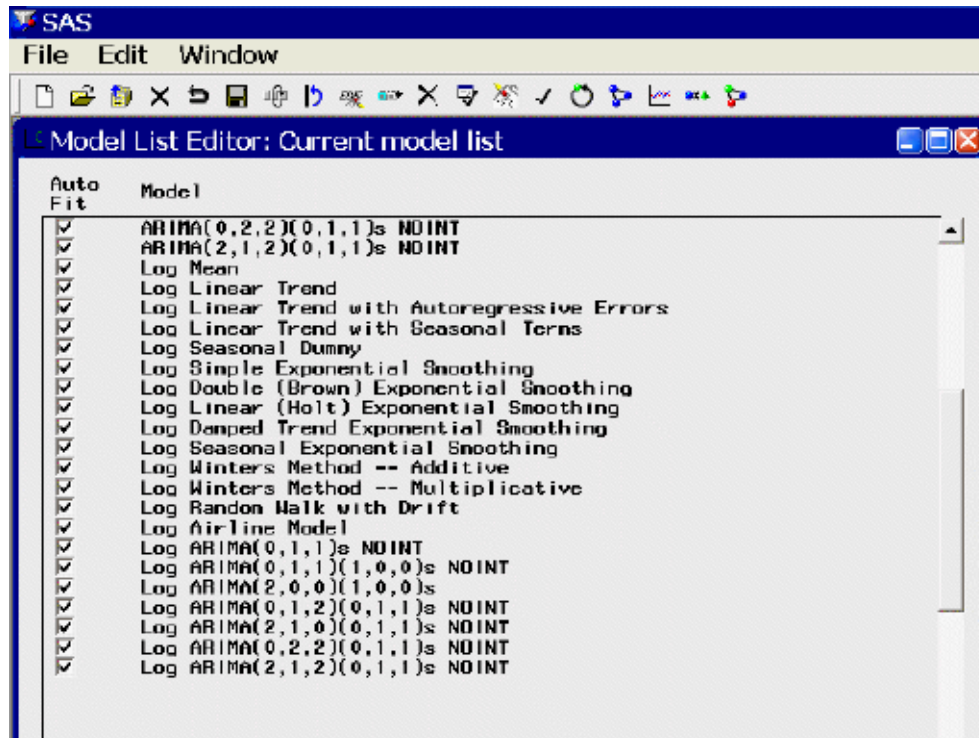
Having modified the current model list, you can save it for future use in several ways:

- Save it in a catalog so it can be opened later in the Model Selection List Editor.
- Save it as the user default to be used automatically when new projects are created.
- Select *close* to close the Model Selection List Editor and attach the modified model selection list to the current project.
- Select *cancel* to close the Model Selection List Editor without changing the current project's model selection list.

Since model selection lists are not bound to specific data sources, care must be taken when including data-specific features such as interventions and regressors. When you add an ARIMA, Factored ARIMA, or Custom model to the list, you can add regressors by selecting from the variables in the current data set. If there is no current data set, you will be prompted to specify a data set so you can select regressors from the series it contains.

If you use a model list that has models with a particular regressor name on a data set that does not contain a series of that name, model fitting will fail. However, you can make global changes to the regressor names in the model list by using *Set regressor names*. For example, you might use the list of dynamic regression models found in the sashelp.forecast catalog. It uses the regressor name “price.” If your regressor series is named “x,” you can specify “price” as the current regressor name and “x” as the “change to” name. The change will be applied to all models in the list that contain the specified regressor name.

Interventions cannot be defined for models defined from the Model Selection List Editor. However, you can define interventions by using the Intervention Specification Window and apply them to your models by turning on the Include Interventions option.



Auto Fit

The auto fit column of check boxes enables you to eliminate some of the models from being used in the automatic fitting process without having to delete them from the list. By default, all models are checked, meaning that they are all used for automatic fitting.

Model

This column displays the descriptions of all models in the model selection list. You can select one or more models by clicking them. Selected models are highlighted and become the object of the actions Edit, Move, and Delete.

Menu Bar

File

New

creates a new empty model selection list.

Open

opens a dialog for selecting one or more existing model selection lists to open. If you select multiple lists, they are all opened at once as a concatenated list. This helps you build large specialized model lists quickly by mixing and matching various existing lists such as the various

ARIMA model lists included in SASHELP.FORCAST. By default, the lists you open replace the current model list. Select the “append” radio button if you want to append them to the current model list.

Open System Default

opens the default model list supplied with the product.

Cancel

exits the window without applying any changes to the current project’s model selection list.

Close

closes the window and applies any changes made to the project’s model selection list.

Save

opens a dialog for saving the edited model selection list in a catalog of your choice.

Save as User Default

saves your edited model list as a default list for new projects. The location of this saved list is shown on the message line. When you create new projects, the system searches for this model list and uses it if it is found. If it is not found, the system uses the original default model list supplied with the product.

Edit

Reset

restores the list to its initial state when the window was invoked.

Add Model

enables you to add new models to the selection list. You can use the Smoothing Model Specification window, the ARIMA Model Specification window, the Factored ARIMA Model Specification window, or the Custom Model Specification window.

Edit Selected

opens the appropriate model specification window for changing the attributes of the highlighted model and adding the modified model to the selection list. The original model is not deleted.

Move Selected

enables you to reorder the models in the list. Select one or more models, then select Move Selected from the menu or toolbar. A note appears on the message line: “Select the row after which the selected models are to be moved.” Then select any unhighlighted row in the table. The selected models will be moved after this row.

Delete

deletes any highlighted models from the list. This item is not available if no models are selected.

Set Regressor Names

opens a dialog for changing all occurrences of a given regressor name in the models of the current model selection list to a name that you specify.

Select All

selects all models in the list.

Clear Selections

deselects all models in the list.

Select All for Autofit

checks the autofit check boxes of all models in the list.

Clear Autofit Selections

deselects the autofit check boxes of all models in the list.

Mouse Button Actions

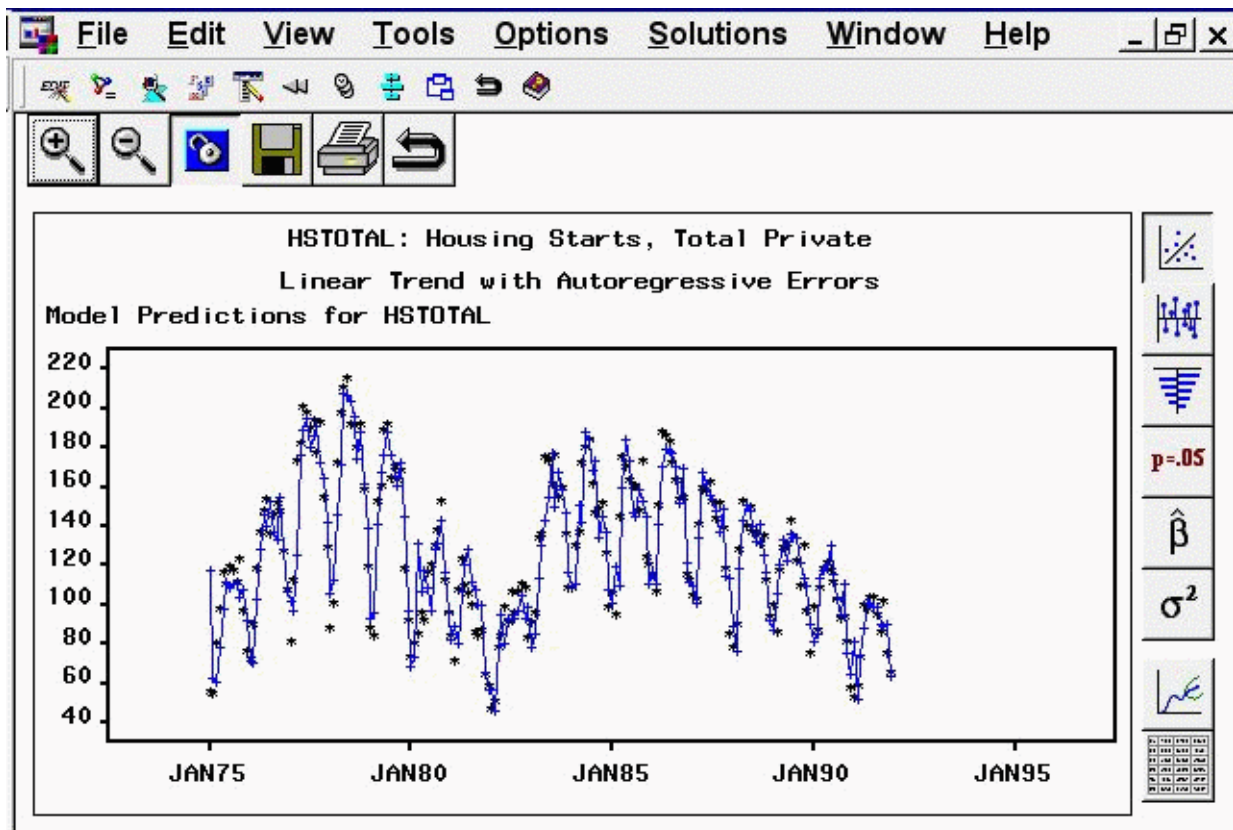
Clicking any model description in the table selects (highlights) that model. Clicking the same model again deselects it. Multiple selections are allowed.

Clicking the auto fit check box in any row toggles the associated model's eligibility for use in automatic model fitting.

Right-clicking the right mouse button opens a pop-up menu.

Model Viewer Window

This resizable window provides plots and tables of actual values, model predictions, forecasts, and related statistics. The various plots and tables available are referred to as *views*. The section “[View Selection Icons](#)” on page 3055 explains how to change the view.



You can access Model Viewer in a number of ways, including the View Model Graphically icon of the Develop Models and Model List windows, the Graph button of the Automatic Model Fitting Results window, and the Model item under the View menu in the Manage Forecasting Project window. In addition, you can go directly to a selected view in the Model Viewer window by selecting Model Predictions, Prediction Errors, Statistics of Fit, Prediction Error Autocorrelations, Prediction Error Tests, Parameter Estimates, Forecast Graph, or Forecast Table from the View menu or corresponding toolbar icon or pop-up menu item in the Develop Models, Model List, or Automatic Model Fitting Results windows.

The state of the Model Viewer window is controlled by the current model and the currently selected view. You can resize this window, and you can use other windows without closing the Model Viewer window. By default, the Model Viewer window is automatically updated to display the new model when you switch to working with another model (that is, when you highlight a different model). You can unlink the Model Viewer window from the current model selection by selecting the Link/Unlink icon from the window's horizontal toolbar. See “Link/Unlink” in the section “[Toolbar Icons](#)” on page 3054.

For more information, see the section “[Model Viewer](#)” on page 2869.

Toolbar Icons

The Model Viewer window contains a horizontal row of icons called the Toolbar. Corresponding menu items appear under various menus. The function of each icon is explained in the following list.

Zoom in

In the Model Predictions, Prediction Errors, and Forecast Graph views, the Zoom In action changes the mouse cursor into cross hairs that you can use with the left mouse button to define a region of the graph to zoom in on. In the Prediction Error Autocorrelations and Prediction Error Tests views, Zoom In reduces the number of lags displayed.

Zoom out

reverses the previous Zoom In action.

Link/Unlink viewer

disconnects or connects the Model Viewer window to the model table (Develop Models window, Model List window, or Automatic Model Fitting Results window). When the viewer is linked, selecting another model in the model table causes the model viewer to be updated to show the selected model. When the Viewer is unlinked, selecting another model does not affect the viewer. This feature is useful for comparing two or more models graphically. You can display a model of interest in the Model Viewer, unlink it, then select another model and open another Model Viewer window for that model. Position the viewer windows side by side for convenient comparisons of models, or use the Next Viewer icon or F12 function key to switch between them.

Save

saves the contents of the Model Viewer window. By default, an HTML page is created. This enables you to display graphs and tables by using the Results Viewer or publish them on the Web or your intranet. See also “Save Graph As” and “Save Data As” under “Menu Bar” below.

Print

prints the contents of the viewer window.

Close

closes the Model Viewer window and returns to the window from which it was invoked.

View Selection Icons

At the right hand side of the Model Viewer window is a vertical toolbar to select the view—that is, the kind of plot or table that the viewer displays. Corresponding menu items appear under View in the menu bar. The function of each icon is explained in the following list.

Model Predictions

displays a plot of actual series values and model predictions over time. Click individual points in the graph to get a display of the type (actual or predicted), ID value, and data value in the upper right corner of the window.

Prediction Errors

displays a plot of model prediction errors (residuals) over time. Click individual points in the graph to get a display of the prediction error value in the upper right corner of the window.

Prediction Error Autocorrelations

displays horizontal bar charts of the sample autocorrelation, partial autocorrelation, and inverse autocorrelation functions for the model prediction errors. Overlaid line plots represent confidence limits computed at plus and minus two standard errors. Click any of the bars to display its value.

Prediction Error Tests

displays horizontal bar charts that represent results of white noise and stationarity tests on the model prediction errors. The first bar chart shows the significance probability of the Ljung-Box chi-square statistic computed on autocorrelations up to the given lag. Longer bars favor rejection of the null hypothesis that the series is white noise. Click any of the bars to display an interpretation.

The second bar chart shows tests of stationarity of the model prediction errors, where longer bars favor the conclusion that the series is stationary. Each bar displays the significance probability of the augmented Dickey-Fuller unit root test to the given autoregressive lag. Long bars represent higher levels of significance against the null hypothesis that the series contains a unit root. For seasonal data, a third bar chart appears for seasonal root tests. Click on any of the bars to display an interpretation.

Parameter Estimates

displays a table showing model parameter estimates along with standard errors and t tests for the null hypothesis that the parameter is zero.

Statistics of Fit

displays a table of statistics of fit for the selected model. The set of statistics shown can be changed by using the Statistics of Fit item under Options in the menu bar.

Forecast Graph

displays a plot of actual and predicted values for the series data range, followed by a horizontal reference line and forecasted values with confidence limits. Click individual points in the graph to get a display of the type, date/time, and value of the data point in the upper right corner of the window.

Forecast Table

displays a data table with columns containing the date/time, actual, predicted, error (residual), lower confidence limit, and upper confidence limit values, together with any predictor series.

Menu Bar

File

Save Graph

saves the plot displayed in viewer window as a SAS/GRAPH grseg catalog entry. When the current view is a table, this menu item is not available. See also “Save” in the section “[Toolbar Icons](#)” on page 3054. If a graphics catalog entry name has not already been specified, this action functions like “Save Graph As.”

Save Graph As

saves the current graph as a SAS/GRAPH grseg catalog entry in a SAS catalog that you specify and/or as an Output Delivery System (ODS) object. By default, an HTML page is created, with the graph embedded as a gif image.

Save Data

saves the data displayed in the viewer window in a SAS data set, where applicable.

Save Data As

saves the data in a SAS data set that you specify and/or as an Output Delivery System (ODS) object. By default, an HTML page is created, with the data displayed as a table.

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Graph

prints the contents of the viewer window if the current view is a graph. This is the same as the Print toolbar icon. If the current view is a table, this menu item is not available.

Print Data

prints the data displayed in the viewer window, where applicable.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Print Preview

opens a preview window to show how your plots will appear when printed.

Close

closes the Model Viewer window and returns to the window from which it was invoked.

Edit

Edit Model

enables you to modify the specification of the current model and to fit the modified model, which is then displayed in the viewer.

Refit Model

refits the current model by using data within the current fit range. This action also causes the ranges to be reset if the data range has changed.

Reevaluate Model

reevaluates the current model by using data within the current evaluation range. This action also causes the ranges to be reset if the data range has changed.

View

See “[View Selection Icons](#)” on page 3055. It describes each of the items available under “View,” except “Zoom Way Out.”

Zoom Way Out

zooms the plot out as far as it will go, undoing all prior zoom in operations.

Tools**Link Viewer**

See “Link/Unlink” in the section “[Toolbar Icons](#)” on page 3054.

Options**Time Ranges**

opens the Time Ranges Specification window to enable you to change the period of fit, period of evaluation, or forecast horizon to be applied to subsequently fit models.

Statistics of Fit

opens the Statistics of Fit Selection window, which presents a list of statistics that the system can display. Use this action to customize the list of statistics shown in the statistics of fit table and available for selection in the Model Selection Criterion menu.

Forecast Options

opens the Forecast Options window, which enables you to control the widths of forecast confidence limits and control the kind of predicted values computed for models that include series transformations.

Residual Plot Options

Provides a choice of four methods of computing prediction errors for models which include a data transformation.

Prediction Errors

computes the difference between the transformed series actual values and model predictions.

Normalized Prediction Errors

computes prediction errors in normalized form.

Model Residuals

computes the difference between the untransformed series values and the untransformed model predictions.

Normalized Model Residuals

computes model residuals in normalized form.

Number of Lags

opens a window to enable you to specify the number of lags shown in the Prediction Error Autocorrelations and Prediction Error Tests views. You can also use the Zoom In and Zoom Out actions to control the number of lags displayed.

Correlation Probabilities

controls whether the bar charts in the Prediction Error Autocorrelations view represent significance probabilities or values of the correlation coefficient. A check mark or filled check box next to this item indicates that significance probabilities are displayed. In each case the bar graph horizontal axis label changes accordingly.

Include Interventions

controls whether intervention effects defined for the current series are automatically added as predictors to the models considered by the automatic selection process. A check mark or filled check box next to this item indicates that the option is turned on.

Print Audit Trail

prints to the SAS log information about the models fit by the system. A check mark or filled check box next to this item indicates that the audit option is turned on.

Show Source Statements

controls whether SAS statements submitted by the forecasting system are printed in the SAS log. When the Show Source Statements option is selected, the system sets the SAS system option SOURCE before submitting SAS statements; otherwise, the system uses the NOSOURCE option. Note that only some of the functions performed by the forecasting system are accomplished by submitting SAS statements. A check mark or filled check box next to this item indicates that the option is turned on.

Mouse Button Actions

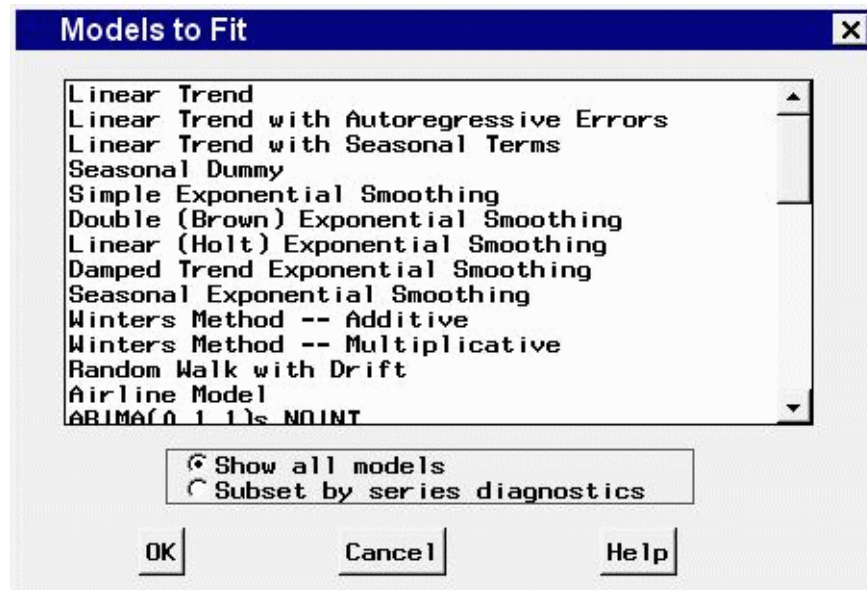
You can examine the data values of individual points in the Model Predictions, Model Prediction Errors, and Forecast Graph views of the Model Viewer by clicking the point. The date/time and data values as well as the type (actual, predicted, and so forth) are displayed in a box that appears in the upper right corner of the Viewer window. Click the mouse elsewhere or select any action to dismiss the data box.

Similarly, you can display values in the Prediction Error Autocorrelations view by clicking any of the bars. Clicking bars in the Prediction Error Tests view displays a Recommendation for Current View window which explains the test represented by the bar.

When you select the Zoom In action in the Predicted Values, Model Prediction Errors, and Forecasted Values views, you can use the mouse to define a region of the graph to zoom. Position the mouse cursor at one corner of the region, press the left mouse button, and move the mouse cursor to the opposite corner of the region while holding the left mouse button down. When you release the mouse button, the plot is redrawn to show an expanded view of the data within the region you selected.

Models to Fit Window

Use the Models to Fit window to fit models by choosing them from the current model selection list. Access it by using “Fit Models from List” under the Fit Model submenu of the Edit menu in the Develop Models window, or the pop-up menu that appears when you click an empty area of the model table in the Develop Models window. If you want to alter the list of models that appears here, use the Model Selection List editor window.



To select a model to be fit, use the left mouse button. To select more than one model to fit, drag with the mouse, or select the first model, then press the shift key while selecting the last model. For noncontiguous selections, press the control key while selecting with the mouse. To begin fitting the models, double-click the last selection or select the OK button.

If series diagnostics have been performed, the radio box is available. If the Subset by series diagnostics radio button is selected, only those models in the selection list that fit the diagnostic criteria will be shown for selection. If you want to choose models that do not fit the diagnostic criteria, select the Show all models button.

Controls and Fields

Show all models

when selected, lists all available models, regardless of the setting of the series diagnostics options.

Subset by series diagnostics

when selected, lists only the available models that are consistent with the series diagnostics options.

OK

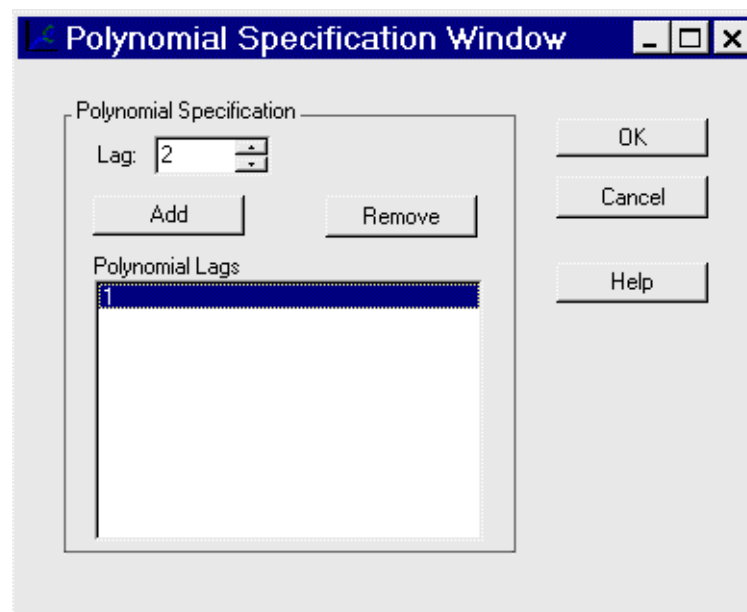
closes the Models to Fit window and fits the selected models.

Cancel

closes the window without fitting any models. Any selections you made are lost.

Polynomial Specification Window

Use the Polynomial Specification window to add a polynomial to an ARIMA model. The set of lags defined here become a polynomial factor, denoted by a list of lags in parentheses, when you select “OK.” If you accessed this window from the AR Polynomial Specification window, then it is added to the autoregressive part of the model. If you accessed it from the MA Polynomial Specification window, it is added to the moving-average part of the model.



Controls and Fields

Lag

specifies a lag value to add to the list. Type in a positive integer or select one by clicking the spin box arrows.

Add

adds the value in the Lag spin box to the list of polynomial lags. Duplicate values are not allowed.

Remove

deletes a selected lag from the list of polynomial lags.

Polynomial Lags

is a list of unique integers that represent lags to be added to the model.

OK

closes the window and returns the specified polynomial to the AR or MA polynomial specification

window.

Cancel

closes the window and discards any polynomial lags added to the list.

Produce Forecasts Window

Use the Produce Forecasts window to produce forecasts for the series in the current input data set for which you have fit forecasting models. Access it by using the Produce Forecasts button of the Time Series Forecasting window.

Produce Forecasts - Project SASUSER.FMSPROJ.PROJ

Input:

Data Set:

Time ID:

Interval:

Series:

Forecast Output:

Data Set:

Format:

Horizon:

Controls and Fields

Input Data Set

is the name of the current input data set. To specify the input data set, you can type a one-level or two-level SAS data set name in this field or select the Browse button to the right of the field.

Input data set Browse button

opens the Data Set Selection window to enable you to select the input data set.

Time ID

is the name of the time ID variable for the input data set. To specify this variable, you can type the ID variable name in this field or use the Select button.

Time ID Select button

opens the Time ID Variable Specification window.

Create button

opens a menu of choices of methods for creating a time ID variable for the input data set. Use this feature if the input data set does not already contain a valid time ID variable.

Interval

is the time interval between observations (data frequency) in the current input data set. If the interval is not automatically filled in by the system, you can type in an interval name here, or select one from the pop-up list.

Series

indicates the number and names of time series variables for which forecasts will be produced.

Series Select button

opens the Series to Process window to let you select the series for which you want to produce forecasts.

Forecast Output Data Set

is the name of the output data set that will contain the forecasts. Type the name of the output data set in this field or click the Browse button.

Forecast Output Browse button

opens a dialog to let you locate an existing data set to which to save the forecasts.

Format

enables you to select one of three formats for the forecast data set:

Simple

specifies the simple format for the output data set. The data set contains the time ID variable and the forecast variables and contains one observation per time period. Observations for earlier time periods contain actual values copied from the input data set; later observations contain the forecasts.

Interleaved

specifies the interleaved format for the output data set. The data set contains the time ID variable, the variable TYPE, and the forecast variables. There are several observations per time period, with the meaning of each observation identified by the TYPE variable.

Concatenated

specifies the concatenated format for the output data set. The data set contains the variable SERIES, the time ID variable, and the variables ACTUAL, PREDICT, ERROR, LOWER, and UPPER. There is one observation per time period per forecast series. The variable SERIES contains the name of the forecast series, and the data set is sorted by SERIES and DATE.

Horizon

is the number of periods or years to forecast beyond the end of the input data range. To specify the forecast horizon, you can type a value in this field or select one from the pop-up list.

Horizon periods

selects the units to apply to the horizon. By default, the horizon value represents number of periods. For example, if the interval is month, the horizon represents the number of months to forecast. Depending on the interval, you can also select weeks or years, so that the horizon is measured in those units.

Horizon date

is the ending date of the forecast horizon. You can type in a date that uses a form recognized by a SAS date informat, or you can increment or decrement the date shown by using the left and right arrows. The outer arrows change the date by a larger amount than the inner arrows. The date field and the horizon field reset each other, so you can use either one to specify the forecasting horizon.

Run button

produces forecasts for the selected series and stores the forecasts in the specified output SAS data set.

Output button

opens a Viewtable window to display the output data set. This button becomes available once the forecasts have been written to the data set.

Close button

closes the Produce Forecasts window and returns to the Time Series Forecasting window.

Menu Bar

File**Import Data**

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Close

closes the Produce Forecasts window and returns to the Time Series Forecasting window.

View**Input Data Set**

opens a Viewtable window to browse the current input data set.

Output Data Set

opens a Viewtable window to browse the output data set. This is the same as the Output button.

Tools**Produce Forecasts**

produces forecasts for the selected series and stores the forecasts in the specified output SAS data set. This is the same as the Run button.

Options

Default Time Ranges

opens the Default Time Ranges window to enable you to control how the system sets the time ranges when new series are selected.

Model Selection List

opens the Model Selection List editor window. Use this to edit the set of forecasting models considered by the automatic model selection process and displayed by the Models to Fit window.

Model Selection Criterion

opens the Model Selection Criterion window, which presents a list of goodness-of-fit statistics and enables you to select the fit statistic that is displayed in the table and used by the automatic model selection process to determine the best fitting model.

Statistics of Fit

opens the Statistics of Fit Selection window, which presents a list of statistics that the system can display. Use this action to customize the list of statistics shown in the Statistics of Fit table and available for selection in the Model Selection Criterion window.

Forecast Options

opens the Forecast Options window, which enables you to control the widths of forecast confidence limits and control the kind of predicted values computed for models that include series transformations.

Forecast Data Set

enables you to select one of three formats for the forecast data set. See `Format`, which is described previously in this section.

Alignment of Dates

Beginning

aligns dates that the system generates to identify forecast observations in output data sets to the beginning of the time intervals.

Middle

aligns dates that the system generates to identify forecast observations in output data sets to the midpoints of the time intervals.

End

aligns dates that the system generates to identify forecast observations in output data sets to the end of the time intervals.

Automatic Fit

opens the Automatic Model Selection Options window, which enables you to control the number of models retained by the automatic model selection process and whether the models considered for automatic selection are subset according to the series diagnostics.

Set Toolbar Type

Image Only

displays the toolbar items as icons without text.

Label Only

displays the toolbar items as text without icon images.

Both

displays the toolbar items as both text and icon images.

Include Interventions

controls whether intervention effects defined for the current series are automatically added as predictors to the models considered by the automatic selection process. A check mark or filled check box next to this item indicates that the option is turned on.

Print Audit Trail

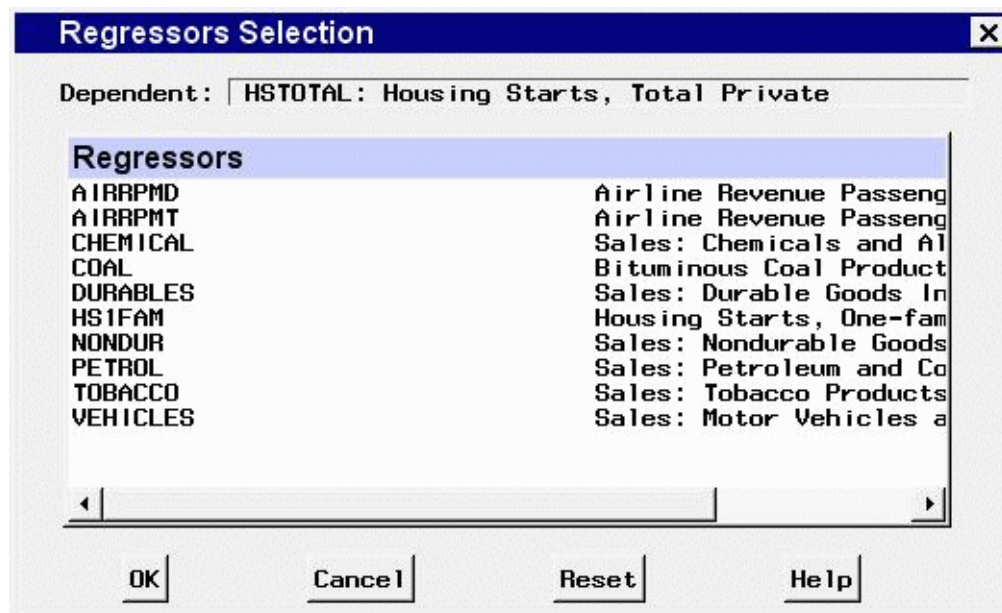
prints to the SAS log information about the models fit by the system. A check mark or filled check box next to this item indicates that the audit option is turned on.

Show Source Statements

controls whether SAS statements submitted by the forecasting system are printed in the SAS log. When the Show Source Statements option is selected, the system sets the SAS system option SOURCE before submitting SAS statements; otherwise, the system uses the NOSOURCE option. Note that only some of the functions performed by the forecasting system are accomplished by submitting SAS statements. A check mark or filled check box next to this item indicates that the option is turned on.

Regressors Selection Window

Use the Regressors Selection window to select one or more time series variables in the input data set to include as regressors in the forecasting model to predict the dependent series. Access it from the pop-up menu that appears when you select the Add button of the ARIMA Model Specification window or Custom Model Specification window.



Controls and Fields

Dependent

is the name and variable label of the current series.

Regressors

is a table listing the names and labels of the variables in the input data set available for selection as regressors. The variables that you select are highlighted. Selecting a highlighted row again deselects that variable.

OK

closes the Regressors Selection window and adds the selected variables as regressors in the model.

Cancel

closes the window without adding any regressors. Any selections you made are lost.

Reset

resets all options to their initial values upon entry to the window.

Save Data As

Use Save Data As from the Time Series Viewer Window or the Model Viewer Window to save data displayed in a table to a SAS data set or external file.

Use Save Forecast As from the Develop Models Window to save forecasts and related data including the series name, model, and interval. It supports append mode, enabling you to accumulate the forecasts of multiple series in a single data set.

Save Data as

SAS Library Output

Library:

Data Set:

Label:

External File Output

☒ Save External File

Title 1:

Title 2:

Title 3:

To save your data in a SAS data set, provide a library name or assign one by using the Browse button, then provide a data set name or accept the default. Enter a descriptive label for the data set in the Label field. Click OK to save the data set. If you specify an existing data set, it will be overwritten, except in the case of Save Forecast As.

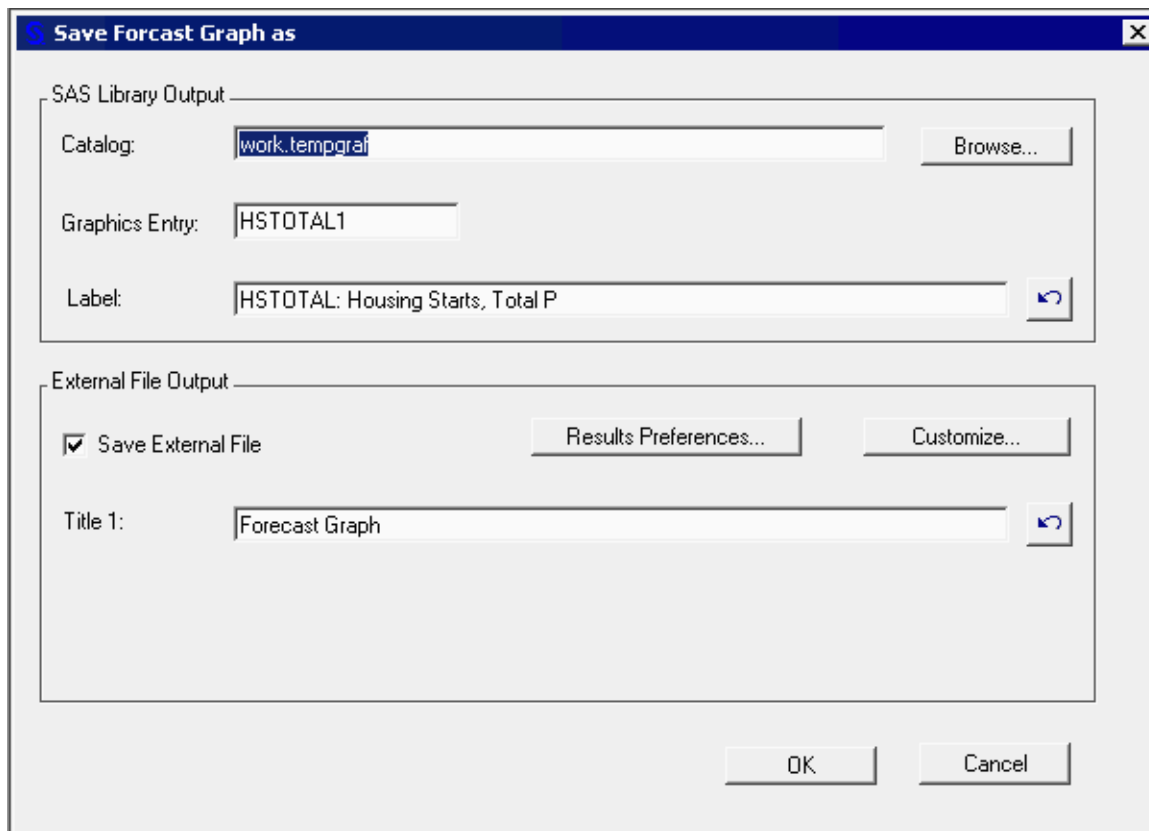
External file output takes advantage of the Output Delivery System (ODS) and is designed primarily for creating HTML tables for Web reporting. You can build a set of Web pages quickly and use the ODS Results window to view and organize them. To use this feature, check Save External File in the External File Output box. To set ODS options, click Results Preferences, then select the Results tab in the Preferences dialog.

If you have previously saved data of the current type, the system remembers your previous labels and titles. To reuse them, click the arrow button to the right of each of these window fields.

Use the Customize button if you need to specify the name of a custom macro that contains ODS statements. The default macro simply runs the PRINT procedure. A custom macro can be used to add PRINT procedure and/or ODS statements to customize the type and organization of output files produced.

Save Graph As

Use Save Graph As from the Time Series Viewer Window or the Model Viewer Window to save any of the graphs in a catalog or external file.



The dialog box is titled "Save Forecast Graph as" and contains two main sections: "SAS Library Output" and "External File Output".

SAS Library Output:

- Catalog:** A text field containing "work.tempgraf" with a "Browse..." button to its right.
- Graphics Entry:** A text field containing "HSTOTAL1".
- Label:** A text field containing "HSTOTAL: Housing Starts, Total P" with a circular arrow button to its right.

External File Output:

- Save External File:** A checked checkbox.
- Results Preferences...** and **Customize...** buttons are located to the right of the checkbox.
- Title 1:** A text field containing "Forecast Graph" with a circular arrow button to its right.

At the bottom of the dialog are **OK** and **Cancel** buttons.

To save your graph as a grseg catalog entry, enter a two level name for the catalog or select Browse to open an Open dialog. Use it to select an existing library or assign a new one and then select a catalog to contain the graph. Click the Open button to open the catalog and close the dialog. Then enter a graphics entry name (eight characters or less) and a label or accept the defaults and click the OK button to save the graph.

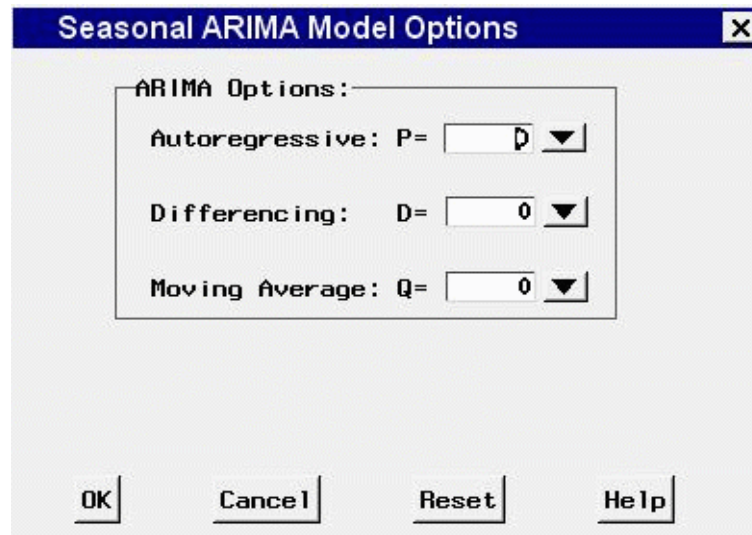
External file output takes advantage of the Output Delivery System (ODS) and is designed primarily for creating gif images and HTML for Web reporting. You can build a set of Web pages that contain graphs and use the Results window to view and organize them. To use this feature, check Save External File in the External File Output box. To set ODS options, click Results Preferences, then select the Results tab in the Preferences dialog.

If you have previously saved graphs of the current type, the system remembers your previous labels and titles. To reuse them, click the arrow button to the right of each of these window fields.

Use the Customize button if you need to specify the name of a custom macro that contains ODS statements. The default macro simply runs the GREPLAY procedure. Users familiar with ODS might want to add statements to the macro to customize the type and organization of output files produced.

Seasonal ARIMA Model Options Window

Use the Seasonal ARIMA Model Options window to specify the autoregressive, differencing, and moving-average orders for the seasonal part of a model defined by using the Custom Model Specification window. Access it by selecting “Seasonal ARIMA...” from the Seasonal Model combo box of that window.



Controls and Fields

ARIMA Options

Use these combo boxes to specify the orders of the ARIMA model. You can either type in a value or click the combo box arrow to select from a pop-up list.

Autoregressive

defines the order of the seasonal autoregressive part of the model.

Differencing

defines the order of seasonal differencing.

Moving Average

defines the order of the seasonal moving-average term.

OK

closes the Seasonal ARIMA Model Options window and returns to the Custom Model Specification window.

Cancel

closes the Seasonal ARIMA Model Options window and returns to the Custom Model Specification window, discarding any changes made.

Reset

resets all options to their initial values upon entry to the window.

Series Diagnostics Window

Use the Series Diagnostics window to set options to limit the kinds of forecasting models considered for the series according to series characteristics. Access it by selecting “Diagnose Series” from the Tools menu in the Develop Models, Manage Project, and Time Series Viewer window menu bars. You can let the system diagnose the series characteristics automatically or you can specify series characteristics according to your judgment by using the radio buttons.

Series Diagnostics

Series:

Series Characteristics:

Log Transform: ☐ Yes ☐ No ☒ Maybe

Trend: ☐ Yes ☐ No ☒ Maybe

Seasonality: ☐ Yes ☐ No ☒ Maybe

For each of the options Log Transform, Trend, and Seasonality, the value “Yes” means that only models appropriate for series with that characteristic should be considered. The value “No” means that only models appropriate for series without that characteristic should be considered. The value “Maybe” means that models should be considered without regard for that characteristic.

Controls and Fields

Series

is the name and variable label of the current series.

Series Characteristics

Log Transform

specifies whether forecasting models with or without a logarithmic series transformation are appropriate for the series.

Trend

specifies whether forecasting models with or without a trend component are appropriate for the series.

Seasonality

specifies whether forecasting models with or without a seasonal component are appropriate for the series.

Automatic Series Diagnostics

performs the automatic series diagnostic process. The options Log Transform, Trend, and Seasonality are set according to the results of statistical tests.

OK

closes the Series Diagnostics window.

Cancel

closes the Series Diagnostics window without changing the series diagnostics options. Any options you specified are lost.

Reset

resets all options to their initial values upon entry to the Series Diagnostics window.

Clear

resets all options to their default values.

Series Selection Window

Use this resizable window to select a time series variable by specifying a library, a SAS data set or view, and a variable. These selections can be made by typing, by selecting from lists, or by a combination of the two. In addition, you can control the time ID variable and time interval, and you can browse the data set or view plots of the series from this window.

Series Selection

Library: Data Set:
Variable:

Libraries		SAS Data Sets	
SASHELP	V7	TABLE	
SASUSER	V7	USECON	

Time Series Variables	
HSIFAM	Housing Starts, One-family structures
HSTOTAL	Housing Starts, Total Private
NONDUR	Sales: Nondurable Goods Industries Total
PETROL	Sales: Petroleum and Coal Products

Time ID:

Interval:

This window appears automatically when you select the View Series Graphically or Develop Models buttons in the Time Series Forecasting window and no series has been selected, and when you open the Time Series Viewer as a standalone tool. It is also invoked by using the Browse button in the Develop Models window.

The system requires that series names be unique for each frequency (interval) within the forecasting project. If you select a series from the current input data set that already exists in the project with the same interval but a different input data set name, the system warns you and gives you the option to cancel the selection, to refit all models associated with the series by using the data from the current input data set, to delete the models for the series, or to inherit the existing models.

Controls and Fields

Library

is a SAS libname assigned within the current SAS session. If you know the libname associated with the data set of interest, you can type it in this field and press Return. If it is a valid choice, it will appear in the libraries list and will be highlighted. The SAS Data Sets list will be populated with data sets associated with that libname.

Data Set

is the name of a SAS data set (data file or data view) that resides under the selected libname. If you know the name, you can type it in and press Return. If it is a valid choice, it will appear in the SAS Data Sets list and will be highlighted, and the Time Series Variables list will be populated with the numeric variables in the data set.

Variable

is the name of a numeric variable contained in the selected data set. You can type the variable name in this field or you can select the variable with the mouse from the Time Series Variables list.

Time ID

is the name of the ID variable for the input data set. To specify the ID variable, you can type the ID variable name in this field or click the Select button.

Select button

opens the Time ID Variable Specification window to let you select an existing variable in the data set as the Time ID.

Create button

opens a menu of methods for creating a time ID variable for the input data set. Use this feature if the data set does not already contain a valid time ID variable.

Interval

is the time interval between observations (data frequency) in the selected data set. If the interval is not automatically filled in by the system, you can type in an interval name or select one from the pop-up list. For more information about intervals, see Chapter 4, “[Date Intervals, Formats, and Functions](#),” in this book.

OK

This button is present when you have selected “Develop Models” from the Time Series Forecasting window. It closes the Series Selection window and makes the selected series the current series.

Close

If you have selected the View Series Graphically icon from the Time Series Forecasting window, this

button returns you to that window. If you have selected a series, it remains selected as the current series.

If you are using the Time Series Viewer as a standalone application, this button closes the application.

Cancel

This button is present when you have selected “Develop Models” from the Time Series Forecasting window. It closes the Series Selection window without applying any selections made.

Reset

resets the fields to their initial values at entry to the window.

Table

opens a Viewtable window for browsing the selected data set. This can assist you in locating the variable containing data you are looking for.

Graph

opens the Time Series Viewer window to display the selected time series variable. You can switch to a different series in the Series Selection window without closing the Time Series Viewer window. Position the windows so they are both visible, or use the Next Viewer toolbar icon or F12 function key to switch between windows.

Refresh

updates all fields and lists on the window. If you assign a new libname without exiting the Series Selection window, use the refresh action to update the Libraries list so that it will include the newly assigned libname. Also use the Refresh action to update the variables list if the input data set is changed.

Selection Lists

Libraries

displays a list of currently assigned libnames. You can select a libname by clicking it, which is equivalent to typing its name in the Library field. If you cannot locate the library or directory you are interested in, go to the SAS Explorer window, select “New” from the File menu, then select “Library” and “OK.” This opens the New Library dialog window. You also assign a libname by submitting a libname statement from the Editor window. Select the Refresh button to make the new libname available in the libraries list.

SAS Data Sets

displays a list of the SAS data sets (data files or data views) located under the selected libname. You can select one of these by clicking it, which is equivalent to typing its name in the Data Set field.

Time Series Variables

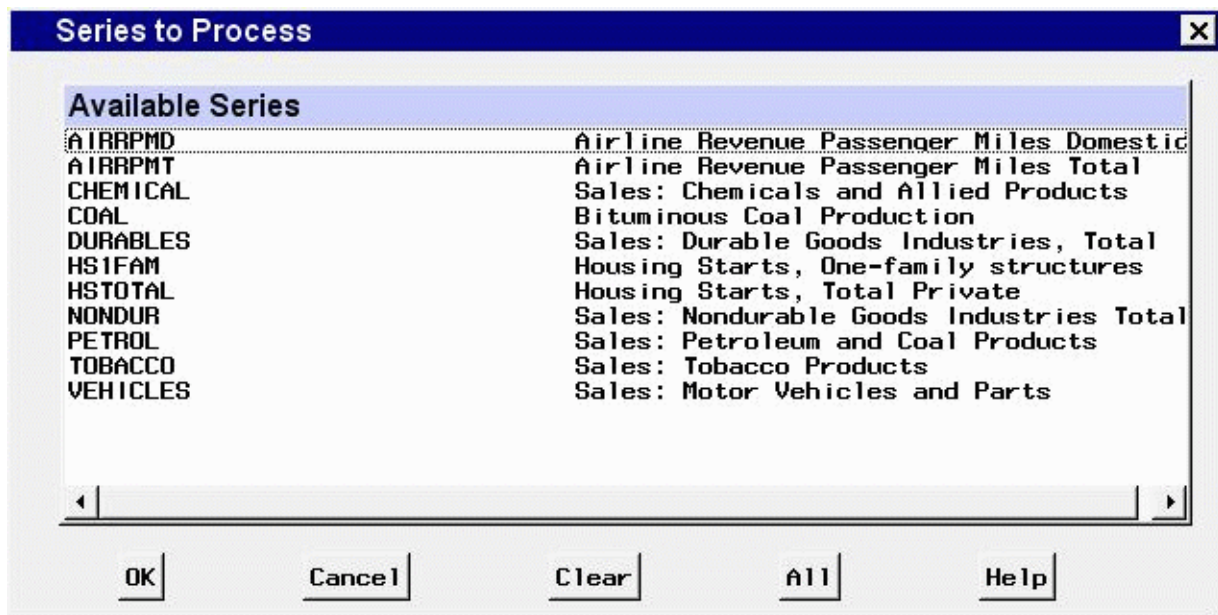
displays a list of numeric variables contained within the selected data set. You can select one of these by clicking it, which is equivalent to typing its name in the Variable field. You can double-click a series to select it and exit the window.

Series to Process Window

Use the Series to Process window to select series for model fitting or forecasting. Access it by using the Select button in the Automatic Model Fitting and Produce Forecasts windows. Hold down the shift key or drag with the left mouse button for multiple selections. Use the control key for noncontiguous multiple selections. Once you make selections and select OK, the number of selected series and their names are listed in the Series to Process field of the calling window (with ellipses if not all the names will fit).

When invoked from Automatic Model Fitting, the Series to Process window shows all the numeric variables in the input data set except the time ID variable. These are the series which are currently available for model fitting.

When invoked from Produce Forecasts, the Series to Process window shows all the series in the input data set for which models have been fit. These are the series which are currently available for forecasting.



Controls and Fields

OK

closes the window and applies the series selection(s) which have been made. At least one series must be selected.

Cancel

closes the window, ignoring series selections which have been made, if any.

Clear

deselects all series in the selection list.

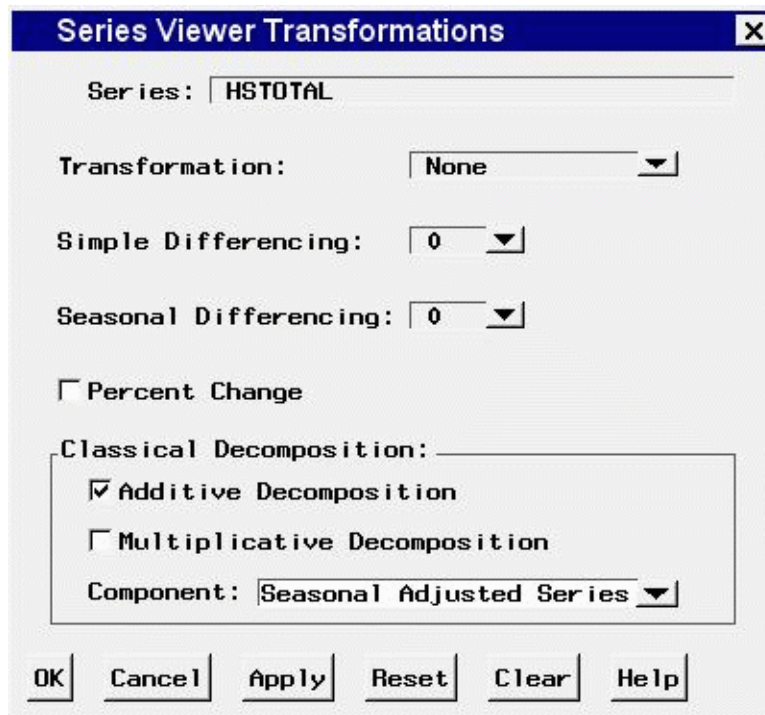
All

selects all series in the selection list.

Series Viewer Transformations Window

Use the Series Viewer Transformations window to view plots of transformations of the current series in the Time Series Viewer window. It provides a larger set of transformations than those available from the viewer window's toolbar. It is invoked by using "Other Transformations" under the Tools menu of the Time Series Viewer window. The options that you specify in this window are applied to the series displayed in the Time Series Viewer window when you select "OK" or "Apply."

Use the Apply button if you want to make repeated transformations to a series without having to close and reopen the Series Viewer Transformations window each time.



Controls and Fields

Series

is the variable name for the current time series.

Transformation

is the transformation applied to the time series displayed in the Time Series Viewer window. Select Log, Logistic, Square Root, Box-Cox, or none from the pop-up list.

Simple Differencing

is the order of differencing applied to the time series displayed in the Time Series Viewer window. Select a number from 0 to 5 from the pop-up list.

Seasonal Differencing

is the order of seasonal differencing applied to the time series displayed in the Time Series Viewer window. Select a number from 0 to 3 from the pop-up list.

Percent Change

is a check box that if selected displays the series in terms of percent change from the previous period.

Additive Decomposition

is a check box that produces a display of a selected series component derived by using additive decomposition.

Multiplicative Decomposition

is a check box that produces a display of a selected series component derived using multiplicative decomposition.

Component

selects a series component to display when either additive or multiplicative decomposition is turned on. You can display the seasonally adjusted component, the trend-cycle component, the seasonal component, or the irregular component—that is, the residual that remains after removal of the other components. The heading in the viewer window shows which component is currently displayed.

OK

applies the transformation options you selected to the series displayed in the Time Series Viewer window and closes the Series Viewer Transformations window.

Cancel

closes the Series Viewer Transformations window without changing the series displayed by the Time Series Viewer window.

Apply

applies the transformation options you selected to the series displayed in the Time Series Viewer window without closing the Series Viewer Transformations window.

Reset

resets the transformation options to their initial values upon entry to the Series Viewer Transformations window.

Clear

resets the transformation options to their default values (no transformations).

Smoothing Model Specification Window

Use the Smoothing Model Specification window to specify and fit exponential smoothing and Winters method models. Access it from the Develop Models window by using the Fit Model submenu of the Edit menu or from the pop-up menu when you click an empty area of the model table.

Smoothing Model Specification

Series:

Model:

Smoothing Methods:

- ☐ Simple Smoothing
- ☐ Double (Brown) Smoothing
- ☐ Seasonal Smoothing
- ☐ Linear (Holt) Smoothing
- ☐ Damped-Trend Smoothing
- ☐ Winters Method - Additive
- ☒ Winters Method - Multiplicative

Transformation: ▼

Smoothing Weights:

Level:

Trend:

Damping:

Season:

Bounds: ▼

Controls and Fields

Series

is the name and variable label of the current series.

Model

is a descriptive label for the model that you specify. You can type a label in this field or allow the system to provide a label. If you leave the label blank, a label is generated automatically based on the options you specify.

Smoothing Methods

Simple Smoothing

specifies simple (single) exponential smoothing.

Double (Brown) Smoothing

specifies double exponential smoothing by using Brown's one parameter model (single exponential smoothing applied twice).

Seasonal Smoothing

specifies seasonal exponential smoothing. (This is like Winters method with the trend term omitted.)

Linear (Holt) Smoothing

specifies exponential smoothing of both the series level and trend (Holt's two parameter model).

Damped-Trend Smoothing

specifies exponential smoothing of both the series level and trend with a trend damping weight.

Winters Method - Additive

specifies Winters method with additive seasonal factors.

Winters Method - Multiplicative

specifies Winters method with multiplicative seasonal factors.

Smoothing Weights

displays the values used for the smoothing weights. By default, the Smoothing Weights fields are set to “optimize,” which means that the system will compute the weight values that best fit the data. You can also type smoothing weight values in these fields.

Level

is the smoothing weight used for the level of the series.

Trend

is the smoothing weight used for the trend of the series.

Damping

is the smoothing weight used by the damped-trend method to damp the forecasted trend towards zero as the forecast horizon increases.

Season

is the smoothing weight used for the seasonal factors in Winters method and seasonal exponential smoothing.

Transformation

displays the series transformation specified for the model. When a transformation is specified, the model is fit to the transformed series, and forecasts are produced by applying the inverse transformation to the model predictions. Select *Log*, *Logistic*, *Square Root*, *Box-Cox*, or *None* from the pop-up list.

Bounds

displays the constraints imposed on the fitted smoothing weights. Select one of the following from the pop-up list:

Zero-One/Additive

sets the smoothing weight optimization region to the intersection of the region bounded by the intervals from zero (0.001) to one (0.999) and the additive invertible region. This is the default.

Zero-One Boundaries

sets the smoothing weight optimization region to the region bounded by the intervals from zero (0.001) to one (0.999).

Additive Invertible

sets the smoothing weight optimization region to the additive invertible region.

Unrestricted

sets the smoothing weight optimization region to be unbounded.

Custom

opens the *Smoothing Weights* window to enable you to customize the constraints for smoothing weights optimization.

OK

closes the Smoothing Model Specification window and fits the model you specified.

Cancel

closes the Smoothing Model Specification window without fitting the model. Any options you specified are lost.

Reset

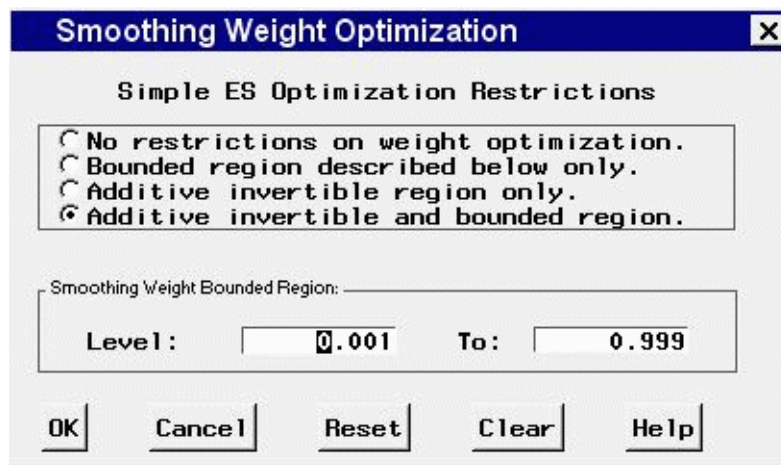
resets all options to their initial values upon entry to the window. This might be useful when editing an existing model specification; otherwise, Reset has the same function as Clear.

Clear

resets all options to their default values.

Smoothing Weight Optimization Window

Use the Smoothing Weight Optimization window to specify constraints for the automatic fitting of smoothing weights for exponential smoothing and Winters method models. Access it from the Smoothing Models Specification window when you select “Custom” in the “Bounds” combo box.



Controls and Fields

No restrictions

when selected, specifies unrestricted smoothing weights.

Bounded region

when selected, restricts the fitted smoothing weights to be within the bounds that you specify with the “Smoothing Weight Bounded Region” options.

Additive invertible region

when selected, restricts the fitted smoothing weights to be within the additive invertible region of the parameter space of the ARIMA model equivalent to the smoothing model. (See the section “[Smoothing Models](#)” on page 3107 for details.)

Additive invertible and bounded region

when selected, restricts the fitted smoothing weights to be both within the additive invertible region and within bounds that you specify.

Smoothing Weight Bounded Region

is a group of numeric entry fields that enable you to specify lower and upper limits on the fitted value

of each smoothing weight. The fields that appear in this part of the window depend on the kind of smoothing model that you specified.

OK

closes the window and sets the options that you specified.

Cancel

closes the window without changing any options. Any values you specified are lost.

Reset

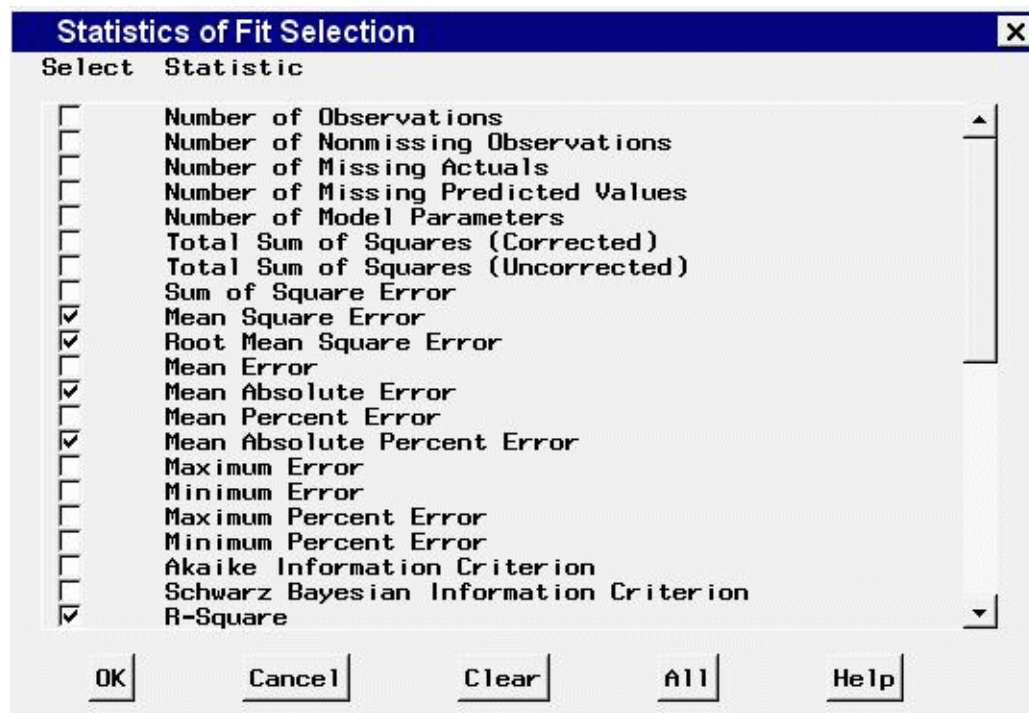
resets all options to their initial values upon entry to the window.

Clear

resets all options to their default values.

Statistics of Fit Selection Window

Use the Statistics of Fit Selection window to specify which of the available goodness-of-fit statistics are reported for models you fit and are available for selection as the model selection criterion used by the automatic selection process. This window is available under the Options menu in the Develop Models, Automatic Model Fitting, Produce Forecasts, and Model List windows, and from the Statistics button of the Model Fit Comparison window and Automatic Model Fitting results windows.



Controls and Fields

Select Statistics Table

list the available statistics. Select a row of the table to select or deselect the statistic shown in that row.

OK

closes the window and applies the selections made.

Cancel

closes the window without applying any selections.

Clear

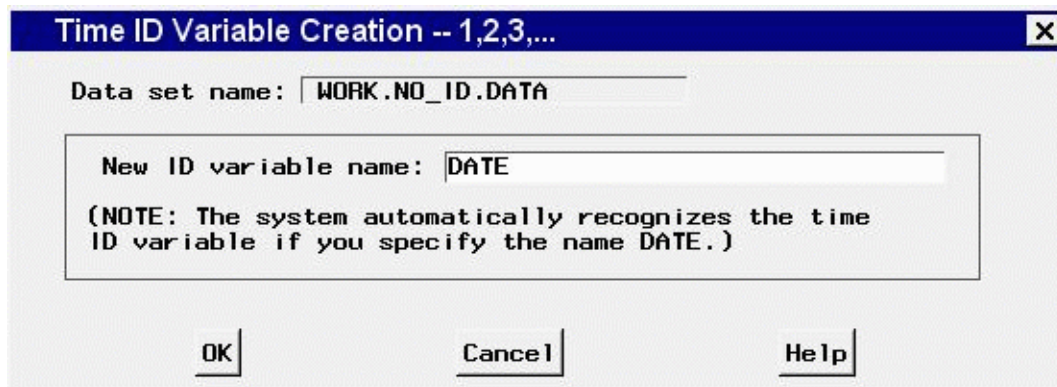
deselects all statistics.

All

selects all statistics.

Time ID Creation – 1,2,3 Window

Use the Time ID Creation – 1,2,3 window to add a time ID variable to an input data set with observation numbers as the ID values. The interval for the series will be 1. Use this approach if the data frequency does not match any of the system's date or date-time intervals, or if other methods of assigning a time ID do not work. To access this window, select "Create from observation numbers" from the Create pop-up list in any window where you can select a Time ID variable. For more information, see Chapter 4, "Date Intervals, Formats, and Functions," in this book.



Controls and Fields

Data set name

is the name of the input data set.

New ID variable name

is the name of the time ID variable to be created. You can type any valid SAS variable name in this field.

OK

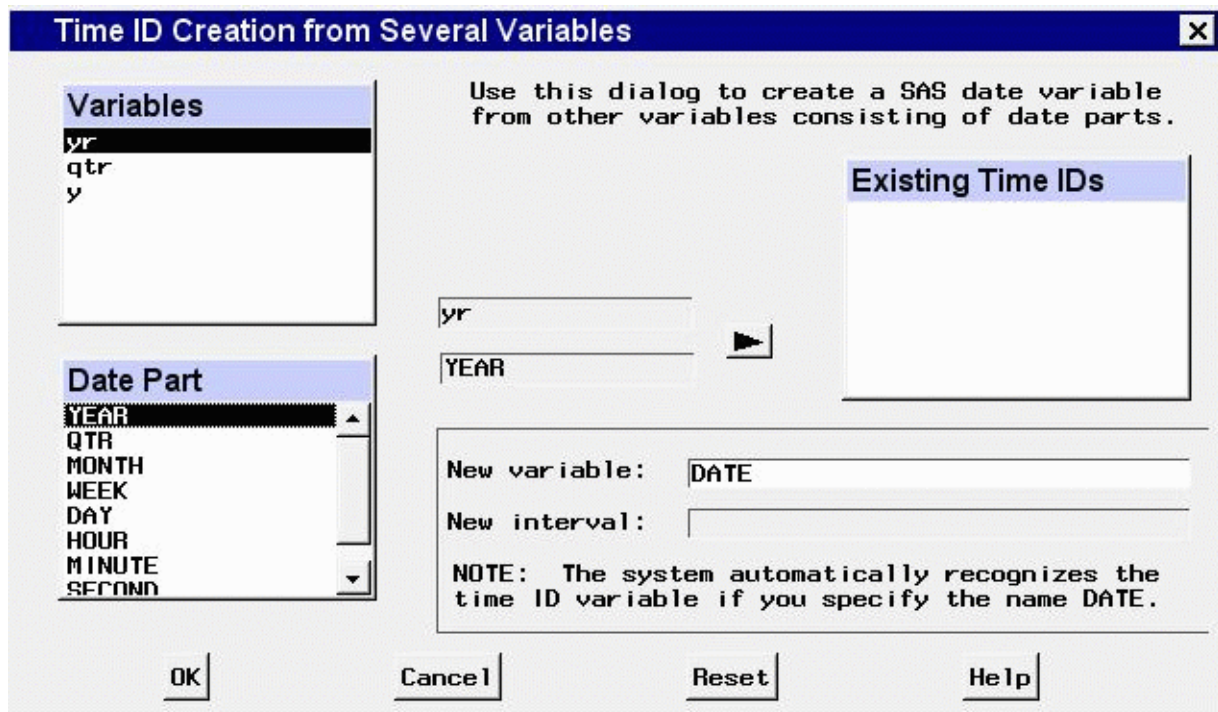
closes the window and proceeds to the next step in the time ID creation process.

Cancel

closes the window without creating a Time ID variable. Any options you specified are lost.

Time ID Creation from Several Variables Window

Use the Time ID Creation from Several Variables window to add a SAS date valued time ID variable to an input data set when the input data set already contains several dating variables, such as day, month, and year. To access this window, select “Create from existing variables” from the Create pop-up list in any window where you can select a Time ID variable. For more information, see Chapter 44, “Creating Time ID Variables.”



Controls and Fields

Variables

is a list of variables in the input data set. Select existing ID variables from this list.

Date Part

is a list of date parts that you can specify for the selected ID variable. For each ID variable that you select from the Variables list, select the Date Part value that describes what the values of the ID variable represent.

arrow button

moves the selected existing ID variable and date part specification to the “Existing Time IDs” list. Once you have done this, you can select another ID variable from the Variables list.

New variable

is the name of the time ID variable to be created. You can type any valid SAS variable name in this field.

New interval

is the time interval between observations in the input data set implied by the date part ID variables you have selected.

OK

closes the window and proceeds to the next step in the time ID creation process.

Cancel

closes the window without creating a time ID. Any options you specified are lost.

Reset

resets the options to their initial values upon entry to the window.

Time ID Creation from Starting Date Window

Use the Time ID Creation from Starting Date window to add a SAS date valued time ID variable to an input data set. This is a convenient way to add a time ID of any interval as long as you know the starting date of the series. To access this window, select “Create from starting date and frequency” from the Create pop-up list in any window where you can select a Time ID variable. For more information, see Chapter 44, “Creating Time ID Variables.”

Time ID Creation from Starting Date

Data set name:

Starting Date:

Interval:

New ID variable name:

(NOTE: The system automatically recognizes the time ID variable if you specify the name DATE.)

Controls and Fields

Data set name

is the name of the input data set.

Starting Date

is the starting date for the time series in the data set. Enter a date value in this field, using a form recognizable by a SAS date informat, for example, 1998:1, feb1997, or 03mar1998.

Interval

is the time interval between observations in the data set. Select an interval from the pop-up list.

New ID variable name

is the name of the time ID variable to be created. You can type any valid SAS variable name in this field.

OK

closes the window and proceeds to the next step in the time ID creation process.

Cancel

closes the window without changing the input data set. Any options you specified are lost.

Time ID Creation Using Informat Window

Use the Time ID Creation using Informat window to add a SAS date valued time ID variable to an input data set. Use this window if your data set contains a date variable that is stored as a character string. Using the appropriate SAS date informat, the date string is read in and used to create a date or date-time variable. To access this window, select “Create from existing variable/informat” from the Create pop-up list in any window where you can select a Time ID variable.

Time Id Creation using Informat [X]

Existing Variable and Informat: _____

Variable Name: _____ **Select...**

Informat: _____ ▼

First obs: _____

Date Value: _____

New ID variable name: **DATE**

NOTE: The system automatically recognizes the time ID variable if you specify the name DATE.

OK **Cancel** **Reset** **Help**

Controls and Fields

Variable Name

is the name of an existing ID variable in the input data set. Click the Select button to select a variable.

Select button

opens a list of variables in the input data set for you to select from.

Informat

is a SAS date or datetime informat for reading date or datetime value from the values of the specified existing ID variable. You can type in an informat or select one from the pop-up list.

First Obs

is the value of the variable you selected from the first observation in the data set, displayed here for convenience.

Date Value

is the SAS date or datetime value read from the first observation value that uses the informat that you specified.

New ID variable name

is the name of the time ID variable to be created. You can type any valid SAS variable name in this field.

OK

closes the window and proceeds to the next step in the time ID creation process.

Cancel

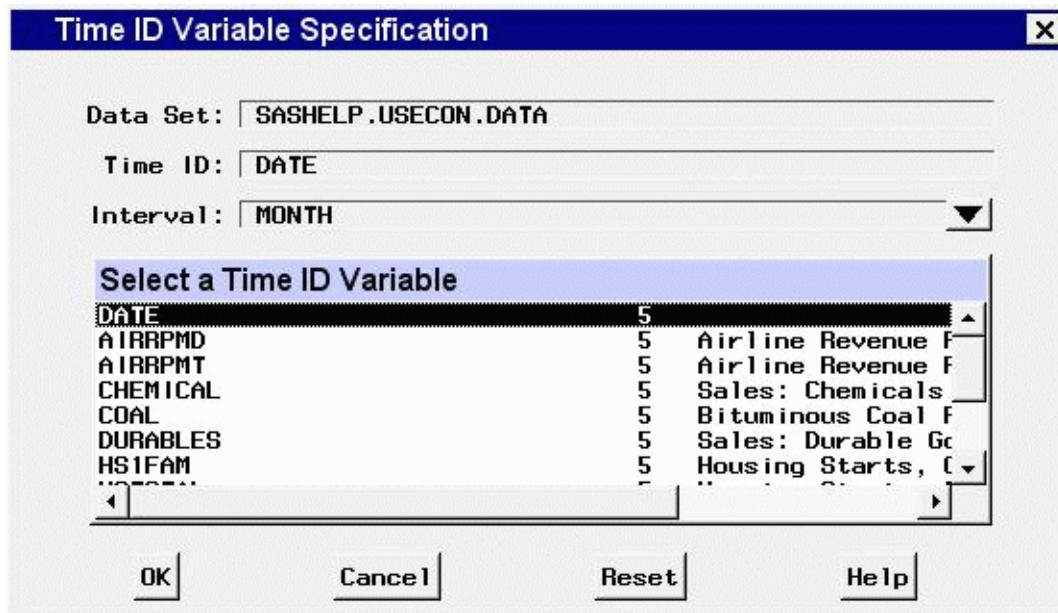
closes the window without changing the input data set. Any options you specified are lost.

Reset

resets the options to their initial values upon entry to the window.

Time ID Variable Specification Window

Use the Time ID Variable Specification window to specify a variable in the input data set that contains the SAS date or datetime value of each observation. You do not need to use this window if your time ID variable is named `date`, `time`, or `datetime`, since these are picked up automatically. Invoke the window from the Select button to the right of the Time ID field in the Data Set Selection, Automatic Model Fitting, Produce Forecasts, Series Selection, and Time Series Forecasting windows.



Controls and Fields

Data Set

is the name of the current input data set.

Time ID

is the name of the currently selected Time ID variable, if any.

Interval

is the time interval between observations (data frequency) in the input data set.

Select a Time ID Variable

is a selection list of variables in the input set. Select one variable to assign it as the Time ID variable.

OK

closes the window and retains the selection made, if it is a valid time ID.

Cancel

closes the window and ignores any selection made.

Reset

restores the time ID variable to the one assigned when the window was initially opened, if any.

Time Ranges Specification Window

Use the Time Ranges Specification window to control the period of fit and evaluation and the forecasting horizon. Invoke this window from the Options menu in the Develop Models, Manage Forecasting Project, and Model Viewer windows or the Set Ranges button in the Develop Models window.

Time Ranges Specification

Data Set:

Interval:

Series:

Time Ranges:

	From	To
Data Range:	<input type="text" value="JAN1975"/>	<input type="text" value="DEC1991"/>
Period of Fit:	<input type="text" value="JAN1975"/>	<input type="text" value="DEC1991"/>
Period of Evaluation:	<input type="text" value="JAN1975"/>	<input type="text" value="DEC1991"/>
Forecast Horizon:	<input type="text" value="12"/> <input type="text" value="Periods"/>	<input type="text" value="DEC1992"/>
Hold-out Sample:	<input type="text" value="0"/> <input type="text" value="Periods"/>	

OK Cancel Reset Clear Help

Controls and Fields

Data Set

is the name of the current input data set.

Interval

is the time interval (data frequency) for the input data set.

Series

is the variable name and label of the current time series.

Data Range

gives the date of the first and last nonmissing data values available for the current series in the input data set.

Period of Fit

gives the starting and ending dates of the period of fit. This is the time range used for estimating model parameters. By default, it is the same as the data range. You can type dates in these fields, or you can use the arrow buttons to the left and right of the date fields to decrement or increment the date values shown. Date values must be entered in a form recognized by a SAS date informat. (See *SAS Language Reference: Concepts* for information about SAS date informats.) The inner arrows increment by periods, the outer arrows increment by larger amounts, depending on the data interval.

Period of Evaluation

gives the starting and ending dates of the period of evaluation. This is the time range used for evaluating models in terms of statistics of fit. By default, it is the same as the data range. You can type dates in these fields, or you can use the control arrows to the left and right of the date fields to decrement or increment the date values shown. Date values must be entered in a form recognized by a SAS date informat. (See *SAS Language Reference: Concepts* for information about SAS date informats.) The

inner arrows increment by periods, the outer arrows increment by larger amounts, depending on the data interval.

Forecast Horizon

is the forecasting horizon expressed as a number of forecast periods or number of years (or number of weeks for daily data). You can type a number or select one from the pop-up list. The ending date for the forecast period is automatically updated when you change the number of forecasts periods.

Forecast Horizon - Units

indicates whether the Forecast Horizon value represents periods or years (or weeks for daily data).

Forecast Horizon Date Value

is the date of the last forecast observation. You can type a date in this field, or you can use the arrow buttons to the left and right of the date field to decrement or increment the date values shown. Date values must be entered in a form recognized by a SAS date informat. (See *SAS Language Reference: Concepts* for information about SAS date informats.) The Forecast Horizon is automatically updated when you change the ending date for the forecast period.

Hold-out Sample

specifies that a number of observations or years (or weeks) of data at the end of the data range are used for the period of evaluation with the remainder of data used as the period of fit. You can type a number in this field or select one from the pop-up list. When the hold-out sample value is changed, the Period of Fit and Period of Evaluation ranges are changed to reflect the hold-out sample specification.

Hold-out Sample - Units

indicates whether the hold-out sample field represents periods or years (or weeks for daily data).

OK

closes the window and stores the specified changes.

Cancel

closes the window without saving changes. Any options you specified are lost.

Reset

resets the options to their initial values upon entry to the window.

Clear

resets all options to their default values.

Time Series Forecasting Window

The Time Series Forecasting window is the main application window that appears when you invoke the Time Series Forecasting System. It enables you to specify a project file and an input data set and provides access to the other windows described in this chapter.

Time Series Forecasting

Project:

Description:

Data Set:

Time ID:

Interval:

Controls and Fields

Project

is the name of the SAS catalog entry in which forecasting models and other results will be stored and from which previously stored results are loaded into the forecasting system. You can specify the project by typing a SAS catalog entry name in this field or by selecting the Browse button to right of this field. If you specify the name of an existing catalog entry, the information in the project file is loaded. If you specify a one-level name, the catalog name is assumed to be `fmsproj` and the library is assumed to be `sasuser`. For example, `samproj` is equivalent to `sasuser.fmsproj.samproj`.

Project Browse button

opens the Forecasting Project File Selection window to enable you to select and load the project from a list of previously stored projects.

Description

is a descriptive label for the forecasting project. The description you type in this field will be stored with the catalog entry shown in the Project field.

Data Set

is the name of the current input data set. To specify the input data set, you can type the data set name in this field or use the Browse button to the right of the field.

Data set Browse button

opens the Data Set Selection window to enable you to select the input data set.

Time ID

is the name of the ID variable for the input data set. To specify the ID variable, you can type the ID variable name in this field or use the Select button. If the time ID variable is named `date`, `time`, or `datetime`, it is automatically picked up by the system.

Select button

opens the Time ID Variable Specification window.

Create button

opens a menu of choices of methods for creating a time ID variable for the input data set. Use this feature if the input data set does not already contain a valid time ID variable.

Interval

is the time interval between observations (data frequency) in the current input data set. If the interval is not automatically filled in, you can type an interval name or select one from the pop-up list. For more information about intervals, see the section “[Time Series Data Sets, ID Variables, and Time Intervals](#)” on page 2837.

View Series Graphically icon

opens the Time Series Viewer window to display plots of series in the current input data set.

View Data as a Table

opens a Viewtable window for browsing the selected input data set.

Develop Models

opens the Develop Models window to enable you to fit forecasting models to individual time series and choose the best models to use to produce the final forecasts of each series.

Fit Models Automatically

opens the Automatic Model Fitting window for applying the automatic model selection process to all series or to selected series in an input data set.

Produce Forecast

opens the Produce Forecasts window for producing forecasts for the series in the current input data set for which you have fit forecasting models.

Manage Projects

opens the Manage Forecasting Project window for viewing or editing information stored in projects.

Exit

closes the Time Series Forecasting system.

Help

accesses the help system.

Time Series Simulation Window

Use the Time Series Simulation window to create a data set of simulated series generated by ARIMA processes. Access this window from the Tools menu in the Develop Models and Manage Forecasting Project windows.

Time Series Simulation

Output Data Set:

Interval: <input type="text" value="WEEKDAY"/>	N Observations: <input type="text" value="60"/>
ID Name: <input type="text" value="DATE"/>	Starting Date: <input type="text" value="Mon, 1 Jan 90"/>
Seed: <input type="text" value="123456789"/>	Ending Date: <input type="text" value="Fri, 23 Mar 90"/>

Series to Generate

Controls and Fields

Output Data Set

is the name of the data set to be created. Type in a one-level or two-level SAS data set name.

Interval

is the time interval between observations (data frequency) in the simulated data set. Type in an interval name or select one from the pop-up list.

Seed

is the seed for the random number generator used to produce the simulated time series.

N Observations

is the number of time periods to simulate.

Starting Date

is the starting date for the simulated observations. Type in a date in a form recognizable by a SAS data informat, for example, 1998:1, feb1997, or 03mar1998.

Ending Date

is the ending date for the simulated observations. Type in a date in a form recognizable by a SAS data informat.

Series to Generate

is the list of variable names and ARIMA processes to simulate.

Add Series

opens the ARIMA Process Specification window to enable you to add entries to the Series to Generate list.

Delete Series

deletes selected (highlighted) entries from the Series to Generate list.

OK

closes the Time Series Simulation window and performs the specified simulations and creates the specified data set.

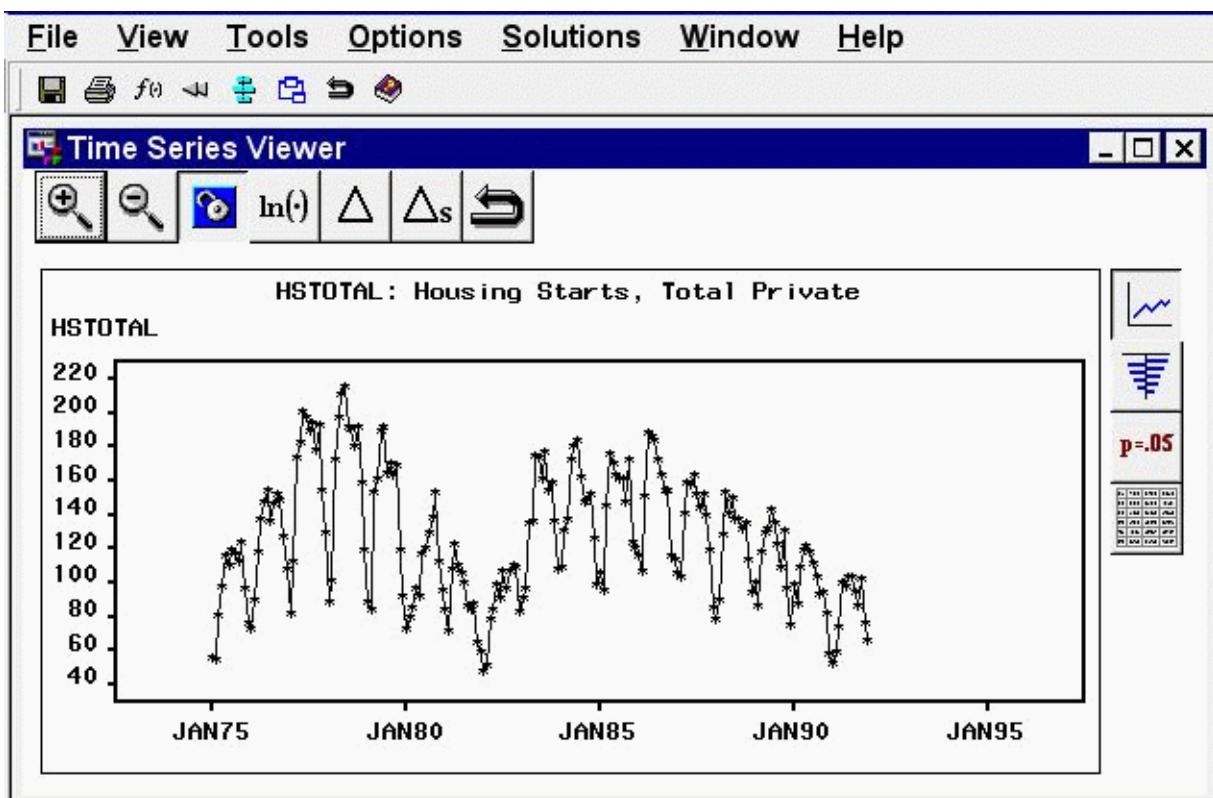
Cancel

closes the window without creating a simulated data set. Any options you specified are lost.

Time Series Viewer Window

Use the Time Series Viewer window to explore time series data using plots, transformations, statistical tests, and tables. It is available as a standalone application and as part of the Time Series Forecasting System. To use it as a standalone application, select it from the Analysis submenu of the Solutions menu, or use the `tsview` command (see Chapter 48, “[Command Reference](#),” in this book). To use it within the Time Series Forecasting System, select the View Series Graphically icon in the Time Series Forecasting, Develop Models, or Model List window, or select “Series” from the View menu of the Develop Models, Manage Project, or Model List window.

The various plots and tables available are referred to as *views*. The section “[View Selection Icons](#)” on page 3055 explains how to change the view.



The state of the Time Series Viewer window is controlled by the current series, the current series transformation specification, and the currently selected view. You can resize this window, and you can use other

windows without closing the Time Series Viewer window. You can explore a number of series conveniently by keeping the Series Selection window open. Each time you make a selection, the viewer window is updated to show the selected series. Keep both windows visible, or switch between them by using the Next Viewer toolbar icon or the F12 function key.

You can open multiple Time Series Viewer windows. This enables you to “freeze” a plot so you can come back to it later, or compare two plots side by side on your screen. To do this, unlink the viewer by using the Link/Unlink icon on the window’s toolbar or the corresponding item in the Tools menu. While the viewer window remains unlinked, it is not updated when other selections are made in the Series Selection window. Instead, when you select a series and click the Graph button, a new Time Series Viewer window is invoked. You can continue this process to open as many viewer windows as you want. The Next Viewer icon and corresponding F12 function key are useful for navigating between windows when they are not simultaneously visible on your screen.

A wide range of series transformations is available. Basic transformations are available from the window’s horizontal toolbar, and others are available by selecting “Other Transformations” from the Tools menu.

Horizontal Tool Bar

The Time Series Viewer window contains a horizontal toolbar with the following icons:

Zoom in

changes the mouse cursor into cross hairs that you can use with the left mouse button to drag out a region of the time series plot to zoom in on. In the Autocorrelations view and the White Noise and Stationarity Tests view, Zoom In reduces the number of lags displayed.

Zoom out

reverses the previous Zoom In action and expands the time range of the plot to show more of the series. In the Autocorrelations view and the White Noise and Stationarity Tests view, Zoom Out increases the number of lags displayed.

Link/Unlink viewer

disconnects or connects the Time Series Viewer window to the window in which the series was selected. When the Viewer is linked, it always shows the current series. If you select another series, linked Viewers are updated. Unlinking a Viewer freezes its current state, and changing the current series has no effect on the Viewer’s display. The View Series action creates a new Series Viewer window if there is no linked Viewer. By using the unlink feature, you can open several Time Series Viewer windows and display several different series simultaneously.

Log Transform

applies a log transform to the current view. This can be combined with other transformations; the current transformations are shown in the title.

Difference

applies a simple difference to the current view. This can be combined with other transformations; the current transformations are shown in the title.

Seasonal Difference

applies a seasonal difference to the current view. For example, if the data are monthly, the seasonal cycle is one year. Each value has subtracted from it the value from one year previous. This can be combined with other transformations; the current transformations are shown in the title.

Close

closes the Time Series Viewer window and returns to the window from which it was invoked.

Vertical Toolbar View Selection Icons

At the right-hand side of the Time Series Viewer window is a vertical toolbar used to select the kind of plot or table that the Viewer displays.

Series

displays a plot of series values over time.

Autocorrelations

displays plots of the sample autocorrelations, partial autocorrelation, and inverse autocorrelation functions for the series, with lines overlaid at plus and minus two standard errors.

White Noise and Stationarity Tests

displays horizontal bar charts that represent results of white noise and stationarity tests. The first bar chart shows the significance probability of the Ljung-Box chi-square statistic computed on autocorrelations up to the given lag. Longer bars favor rejection of the null hypothesis that the series is white noise. Click any of the bars to display an interpretation.

The second bar chart shows tests of stationarity, where longer bars favor the conclusion that the series is stationary. Each bar displays the significance probability of the augmented Dickey-Fuller unit root test to the given autoregressive lag. Long bars represent higher levels of significance against the null hypothesis that the series contains a unit root. For seasonal data, a third bar chart appears for seasonal root tests. Click any of the bars to display an interpretation.

Data Table

displays a data table containing the values in the input data set.

Menu Bar

File**Save Graph**

saves the current plot as a SAS/GRAPH grseg catalog entry in a default or most recently specified catalog. This item is unavailable in the Data Table view.

Save Graph as

saves the current graph as a SAS/GRAPH grseg catalog entry in a SAS catalog that you specify and/or as an Output Delivery System (ODS) object. By default, an HTML page is created, with the graph embedded as a gif image. This item is unavailable in the Data Table view.

Save Data

saves the data displayed in the viewer window to an output SAS data set. This item is unavailable in the Series view.

Save Data as

saves the data in a SAS data set that you specify and/or as an Output Delivery System (ODS) object. By default, an HTML page is created, with the data displayed as a table.

Import Data

is available if you license SAS/Access software. It opens an Import Wizard, which you can use to import your data from an external spreadsheet or data base to a SAS data set for use in the Time Series Forecasting System.

Export Data

is available if you license SAS/Access software. It opens an Export Wizard, which you can use to export a SAS data set, such as a forecast data set created with the Time Series Forecasting System, to an external spreadsheet or data base.

Print Graph

prints the plot displayed in the viewer window. This item is unavailable in the Data Table view.

Print Data

prints the data displayed in the viewer window. This item is unavailable in the Series view.

Print Setup

opens the Print Setup window, which allows you to access your operating system print setup.

Print Preview

opens a preview window to show how your plots will look when printed.

Close

closes the Time Series Viewer window and returns to the window from which it was invoked.

View**Series**

displays a plot of series values over time. This is the same as the Series icon in the vertical toolbar.

Autocorrelations

displays plots of the sample autocorrelation, partial autocorrelation, and inverse autocorrelation functions for the series. This is the same as the Autocorrelations icon in the vertical toolbar.

White Noise and Stationarity Tests

displays horizontal bar charts representing results of white noise and stationarity tests. This is the same as the White Noise and Stationarity Tests icon in the vertical toolbar.

Data Table

displays a data table containing the values in the input data set. This is the same as the Data Table icon in the vertical toolbar.

Zoom In

zooms the display. This is the same as the Zoom In icon in the window's horizontal toolbar.

Zoom Out

undoes the last zoom in action. This is the same as the Zoom Out icon in the window's horizontal toolbar.

Zoom Way Out

reverses all previous Zoom In actions and expands the time range of the plot to show all of the series, or shows the maximum number of lags in the Autocorrelations View or the White Noise and Stationarity Tests view.

Tools

Log Transform

applies a log transformation. This is the same as the Log Transform icon in the window's horizontal toolbar.

Difference

applies simple differencing. This is the same as the Difference icon in the window's horizontal toolbar.

Seasonal Difference

applies seasonal differencing. This is the same as the Seasonal Difference icon in the window's horizontal toolbar.

Other Transformations

opens the Series Viewer Transformations window to enable you to apply a wide range of transformations.

Diagnose Series

opens the Series Diagnostics window to determine the kinds of forecasting models appropriate for the current series.

Define Interventions

opens the Interventions for Series window to enable you to edit or add intervention effects for use in modeling the current series.

Link Viewer

connects or disconnects the Time Series Viewer window to the window from which series are selected. This is the same as the Link item in the window's horizontal toolbar.

Options

Number of Lags

opens a window to let you specify the number of lags shown in the Autocorrelations view and the White Noise and Stationarity Tests view. You can also use the Zoom In and Zoom Out actions to control the number of lags displayed.

Correlation Probabilities

controls whether the bar charts in the Autocorrelations view represent significance probabilities or values of the correlation coefficient. A check mark or filled check box next to this item indicates that significance probabilities are displayed. In each case the bar graph horizontal axis label changes accordingly.

Mouse Button Actions

You can examine the data value and date of individual points in the Series view by clicking them. The date and value are displayed in a box that appears in the upper right corner of the Viewer window. Click the mouse elsewhere or select any action to dismiss the data box.

You can examine the values of the bars and confidence limits at different lags in the Autocorrelations view by clicking individual bars in the vertical bar charts.

You can display an interpretation of the tests in the White Noise and Stationarity Tests view by clicking the bars.

When you select the Zoom In action, you can use the mouse to define a region of the graph to take a closer look at. Position the mouse cursor at one corner of the region, press the left mouse button, and move the mouse cursor to the opposite corner of the region while holding the left mouse button down. When you release the mouse button, the plot is redrawn to show an expanded view of the data within the region you selected.

Chapter 50

Forecasting Process Details

Contents

Forecasting Process Summary	3099
Parameter Estimation	3100
Model Evaluation	3100
Forecasting	3103
Forecast Combination Models	3104
External or User-Supplied Forecasts	3104
Adjustments	3105
Series Transformations	3105
Smoothing Models	3107
Smoothing Model Calculations	3107
Missing Values	3108
Predictions and Prediction Errors	3108
Smoothing Weights	3109
Equations for the Smoothing Models	3110
ARIMA Models	3118
Notation for ARIMA Models	3118
Predictor Series	3122
Time Trend Curves	3122
Intervention Effects	3123
Seasonal Dummy Inputs	3125
Series Diagnostic Tests	3125
Statistics of Fit	3126
References	3128

This chapter provides computational details on several aspects of the Time Series Forecasting System.

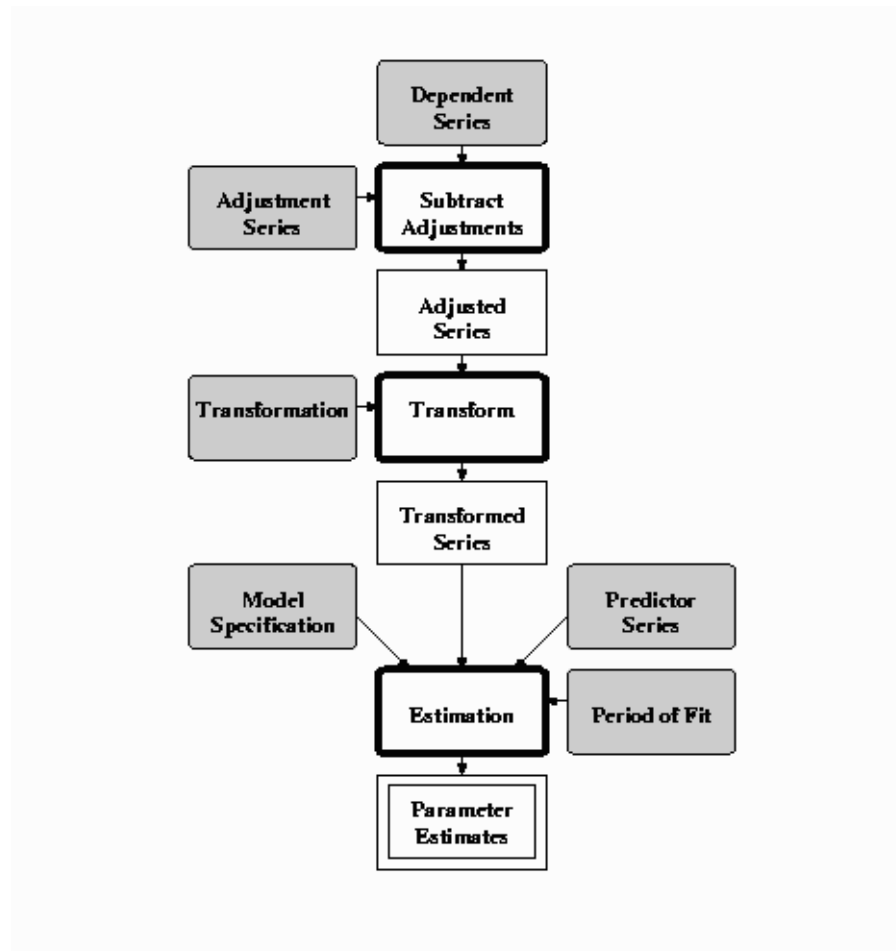
Forecasting Process Summary

This section summarizes the forecasting process.

Parameter Estimation

The parameter estimation process for ARIMA and smoothing models is described graphically in [Figure 50.1](#).

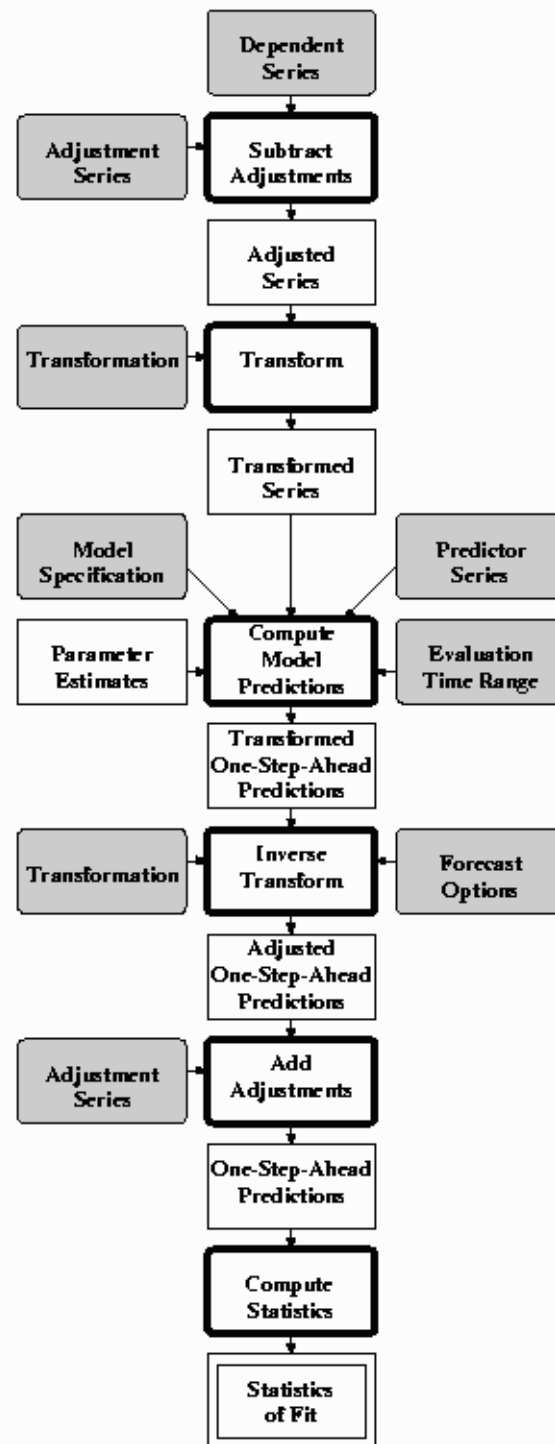
Figure 50.1 Model Fitting Flow Diagram



The specification of smoothing and ARIMA models is described in Chapter 45, “[Specifying Forecasting Models](#).” Computational details for these kinds of models are provided in the following sections “[Smoothing Models](#)” on page 3107 and “[ARIMA Models](#)” on page 3118. The results of the parameter estimation process are displayed in the Parameter Estimates table of the Model Viewer windows along with the estimate of the model variance and the final smoothing state.

Model Evaluation

The model evaluation process is described graphically in [Figure 50.2](#).

Figure 50.2 Model Evaluation Flow Diagram

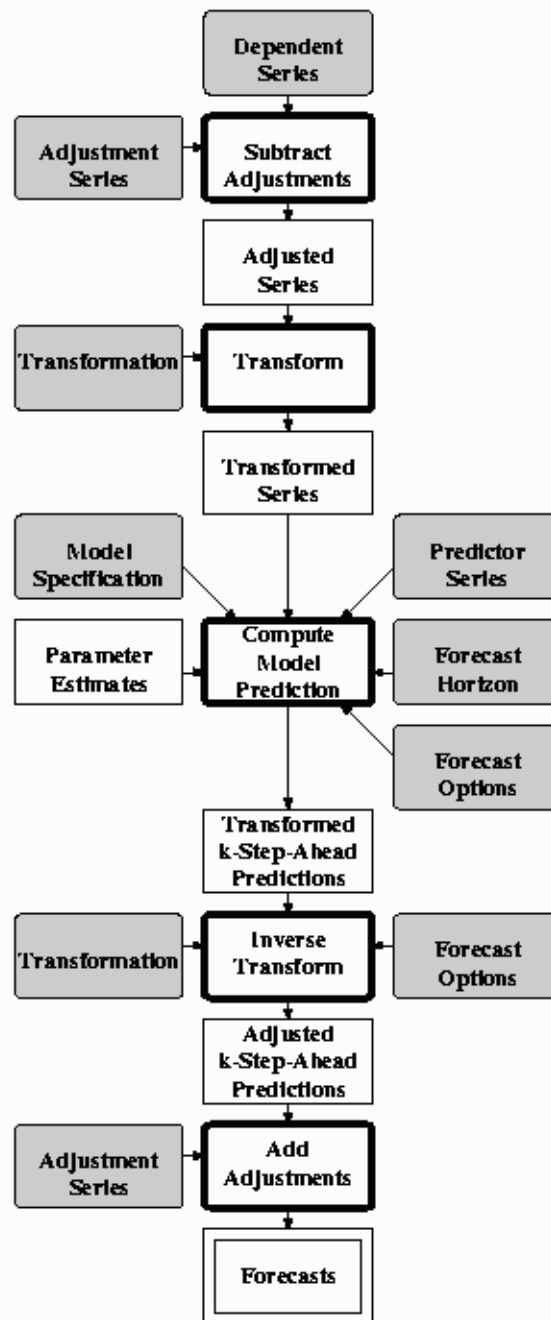
Model evaluation is based on the one-step-ahead prediction errors for observations within the period of evaluation. The one-step-ahead predictions are generated from the model specification and parameter estimates.

The predictions are inverse transformed (median or mean) and adjustments are removed. The prediction errors (the difference of the dependent series and the predictions) are used to compute the statistics of fit, which are described in the section “[Series Diagnostic Tests](#)” on page 3125. The results generated by the evaluation process are displayed in the Statistics of Fit table of the Model Viewer window.

Forecasting

The forecasting generation process is described graphically in Figure 50.3.

Figure 50.3 Forecasting Flow Diagram



The forecasting process is similar to the model evaluation process described in the preceding section, except that k -step-ahead predictions are made from the end of the data through the specified forecast horizon, and prediction standard errors and confidence limits are calculated. The forecasts and confidence limits are displayed in the Forecast plot or table of the Model Viewer window.

Forecast Combination Models

This section discusses the computation of predicted values and confidence limits for forecast combination models. See Chapter 45, “[Specifying Forecasting Models](#),” for information about how to specify forecast combination models and their combining weights.

Given the response time series $\{y_t : 1 \leq t \leq n\}$ with previously generated forecasts for the m component models, a combined forecast is created from the component forecasts as follows:

$$\begin{aligned} \text{Predictions:} \quad & \hat{y}_t = \sum_{i=1}^m w_i \hat{y}_{i,t} \\ \text{Prediction Errors:} \quad & \hat{e}_t = y_t - \hat{y}_t \end{aligned}$$

where $\hat{y}_{i,t}$ are the forecasts of the component models and w_i are the combining weights.

The estimate of the root mean square prediction error and forecast confidence limits for the combined forecast are computed by assuming independence of the prediction errors of the component forecasts, as follows:

$$\begin{aligned} \text{Standard Errors:} \quad & \hat{\sigma}_t = \sqrt{\sum_{i=1}^m w_i^2 \hat{\sigma}_{i,t}^2} \\ \text{Confidence Limits:} \quad & \pm \hat{\sigma}_t Z_{\alpha/2} \end{aligned}$$

where $\hat{\sigma}_{i,t}$ are the estimated root mean square prediction errors for the component models, α is the confidence limit width, $1-\alpha$ is the confidence level, and $Z_{\alpha/2}$ is the $\frac{\alpha}{2}$ quantile of the standard normal distribution.

Since, in practice, there might be positive correlation between the prediction errors of the component forecasts, these confidence limits may be too narrow.

External or User-Supplied Forecasts

This section discusses the computation of predicted values and confidence limits for external forecast models.

Given a response time series y_t and external forecast series \hat{y}_t , the prediction errors are computed as $\hat{e}_t = y_t - \hat{y}_t$ for those t for which both y_t and \hat{y}_t are nonmissing. The mean squared error (MSE) is computed from the prediction errors.

The variance of the k -step-ahead prediction errors is set to k times the MSE. From these variances, the standard errors and confidence limits are computed in the usual way. If the supplied predictions contain so many missing values within the time range of the response series that the MSE estimate cannot be computed, the confidence limits, standard errors, and statistics of fit are set to missing.

Adjustments

Adjustment predictors are subtracted from the response time series prior to model parameter estimation, evaluation, and forecasting. After the predictions of the adjusted response time series are obtained from the forecasting model, the adjustments are added back to produce the forecasts.

If y_t is the response time series and $X_{i,t}$, $1 \leq i \leq m$ are m adjustment predictor series, then the adjusted response series w_t is

$$w_t = y_t - \sum_{i=1}^m X_{i,t}$$

Parameter estimation for the model is performed by using the adjusted response time series w_t . The forecasts \hat{w}_t of w_t are adjusted to obtain the forecasts \hat{y}_t of y_t .

$$\hat{y}_t = \hat{w}_t + \sum_{i=1}^m X_{i,t}$$

Missing values in an adjustment series are ignored in these computations.

Series Transformations

For pure ARIMA models, transforming the response time series can aid in obtaining stationary noise series. For general ARIMA models with inputs, transforming the response time series or one or more of the input time series can provide a better model fit. Similarly, the fit of smoothing models can improve when the response series is transformed.

There are four transformations available, for strictly positive series only. Let $y_t > 0$ be the original time series, and let w_t be the transformed series. The transformations are defined as follows:

Log is the logarithmic transformation,

$$w_t = \ln(y_t)$$

Logistic is the logistic transformation,

$$w_t = \ln(cy_t/(1 - cy_t))$$

where the scaling factor c is

$$c = (1 - 10^{-6})10^{-\text{ceil}(\log_{10}(\max(y_t)))}$$

and $\text{ceil}(x)$ is the smallest integer greater than or equal to x .

Square Root is the square root transformation,

$$w_t = \sqrt{y_t}$$

Box Cox is the Box-Cox transformation,

$$w_t = \begin{cases} \frac{y_t^\lambda - 1}{\lambda}, & \lambda \neq 0 \\ \ln(y_t), & \lambda = 0 \end{cases}$$

Parameter estimation is performed by using the transformed series. The transformed model predictions and confidence limits are then obtained from the transformed time series and these parameter estimates.

The transformed model predictions \hat{w}_t are used to obtain either the minimum mean absolute error (MMAE) or minimum mean squared error (MMSE) predictions \hat{y}_t , depending on the setting of the forecast options. The model is then evaluated based on the residuals of the original time series and these predictions. The transformed model confidence limits are inverse-transformed to obtain the forecast confidence limits.

Predictions for Transformed Models

Since the transformations described in the previous section are monotonic, applying the inverse-transformation to the transformed model predictions results in the *median* of the conditional probability density function at each point in time. This is the minimum mean absolute error (MMAE) prediction.

If $w_t = F(y_t)$ is the transform with inverse-transform $y_t = F^{-1}(w_t)$, then

$$\text{median}(\hat{y}_t) = F^{-1}(E[w_t]) = F^{-1}(\hat{w}_t)$$

The minimum mean squared error (MMSE) predictions are the *mean* of the conditional probability density function at each point in time. Assuming that the prediction errors are normally distributed with variance σ_t^2 , the MMSE predictions for each of the transformations are as follows:

Log is the conditional expectation of inverse-logarithmic transformation,

$$\hat{y}_t = E[e^{w_t}] = \exp(\hat{w}_t + \sigma_t^2/2)$$

Logistic is the conditional expectation of inverse-logistic transformation,

$$\hat{y}_t = E\left[\frac{1}{c(1 + \exp(-w_t))}\right]$$

where the scaling factor $c = (1 - e^{-6})10^{-\text{ceil}(\log_{10}(\max(y_t)))}$.

Square Root is the conditional expectation of the inverse-square root transformation,

$$\hat{y}_t = E[w_t^2] = \hat{w}_t^2 + \sigma_t^2$$

Box Cox is the conditional expectation of the inverse Box-Cox transformation,

$$\hat{y}_t = \begin{cases} E[(\lambda w_t + 1)^{1/\lambda}], & \lambda \neq 0 \\ E[e^{w_t}] = \exp(\hat{w}_t + \frac{1}{2}\sigma_t^2), & \lambda = 0 \end{cases}$$

The expectations of the inverse logistic and Box-Cox ($\lambda \neq 0$) transformations do not generally have explicit solutions and are computed by using numerical integration.

Smoothing Models

This section details the computations performed for the exponential smoothing and Winters method forecasting models.

Smoothing Model Calculations

The descriptions and properties of various smoothing methods can be found in Gardner (1985), Chatfield (1978), and Bowerman and O'Connell (1979). The following section summarizes the smoothing model computations.

Given a time series $\{Y_t : 1 \leq t \leq n\}$, the underlying model assumed by the smoothing models has the following (additive seasonal) form:

$$Y_t = \mu_t + \beta_t t + s_p(t) + \epsilon_t$$

where

μ_t	represents the time-varying mean term.
β_t	represents the time-varying slope.
$s_p(t)$	represents the time-varying seasonal contribution for one of the p seasons.
ϵ_t	are disturbances.

For smoothing models without trend terms, $\beta_t = 0$; and for smoothing models without seasonal terms, $s_p(t) = 0$. Each smoothing model is described in the following sections.

At each time t , the smoothing models estimate the time-varying components described above with the *smoothing state*. After initialization, the smoothing state is updated for each observation using the *smoothing equations*. The smoothing state at the last nonmissing observation is used for predictions.

Smoothing State and Smoothing Equations

Depending on the smoothing model, the *smoothing state* at time t consists of the following:

- L_t is a smoothed level that estimates μ_t .
- T_t is a smoothed trend that estimates β_t .
- S_{t-j} , $j = 0, \dots, p-1$, are seasonal factors that estimate $s_p(t)$.

The smoothing process starts with an initial estimate of the smoothing state, which is subsequently updated for each observation by using the *smoothing equations*.

The smoothing equations determine how the smoothing state changes as time progresses. Knowledge of the smoothing state at time $t-1$ and that of the time series value at time t uniquely determine the smoothing

state at time t . The *smoothing weights* determine the contribution of the previous smoothing state to the current smoothing state. The smoothing equations for each smoothing model are listed in the following sections.

Smoothing State Initialization

Given a time series $\{Y_t : 1 \leq t \leq n\}$, the smoothing process first computes the smoothing state for time $t = 1$. However, this computation requires an initial estimate of the smoothing state at time $t = 0$, even though no data exists at or before time $t = 0$.

An appropriate choice for the initial smoothing state is made by backcasting from time $t = n$ to $t = 1$ to obtain a prediction at $t = 0$. The initialization for the backcast is obtained by regression with constant and linear terms and seasonal dummies (additive or multiplicative) as appropriate for the smoothing model. For models with linear or seasonal terms, the estimates obtained by the regression are used for initial smoothed trend and seasonal factors; however, the initial smoothed level for backcasting is always set to the last observation, Y_n .

The smoothing state at time $t = 0$ obtained from the backcast is used to initialize the smoothing process from time $t = 1$ to $t = n$ (Chatfield and Yar 1988).

For models with seasonal terms, the smoothing state is normalized so that the seasonal factors S_{t-j} for $j = 0, \dots, p - 1$ sum to zero for models that assume additive seasonality and average to one for models (such as Winters method) that assume multiplicative seasonality.

Missing Values

When a missing value is encountered at time t , the smoothed values are updated using the *error-correction form* of the smoothing equations with the one-step-ahead prediction error, e_t , set to zero. The missing value is estimated using the one-step-ahead prediction at time $t - 1$, that is $\hat{Y}_{t-1}(1)$ (Aldrin 1989). The error-correction forms of each of the smoothing models are listed in the following sections.

Predictions and Prediction Errors

Predictions are made based on the last known smoothing state. Predictions made at time t for k steps ahead are denoted $\hat{Y}_t(k)$ and the associated prediction errors are denoted $e_t(k) = Y_{t+k} - \hat{Y}_t(k)$. The *prediction equation* for each smoothing model is listed in the following sections.

The *one-step-ahead predictions* refer to predictions made at time $t - 1$ for one time unit into the future—that is, $\hat{Y}_{t-1}(1)$. The *one-step-ahead prediction errors* are more simply denoted $e_t = e_{t-1}(1) = Y_t - \hat{Y}_{t-1}(1)$. The one-step-ahead prediction errors are also the model residuals, and the sum of squares of the one-step-ahead prediction errors is the objective function used in smoothing weight optimization.

The *variance of the prediction errors* are used to calculate the confidence limits (Sweet 1985, McKenzie 1986, Yar and Chatfield 1990, and Chatfield and Yar 1991). The equations for the variance of the prediction errors for each smoothing model are listed in the following sections.

Note: $\text{var}(\epsilon_t)$ is estimated by the mean square of the one-step-ahead prediction errors.

Smoothing Weights

Depending on the smoothing model, the smoothing weights consist of the following:

α	is a level smoothing weight.
γ	is a trend smoothing weight.
δ	is a seasonal smoothing weight.
ϕ	is a trend damping weight.

Larger smoothing weights (less damping) permit the more recent data to have a greater influence on the predictions. Smaller smoothing weights (more damping) give less weight to recent data.

Specifying the Smoothing Weights

Typically the smoothing weights are chosen to be from zero to one. (This is intuitive because the weights associated with the past smoothing state and the value of current observation would normally sum to one.) However, each smoothing model (except Winters Method—Multiplicative Version) has an ARIMA equivalent. Weights chosen to be within the ARIMA additive-invertible region will guarantee stable predictions (Archibald 1990 and Gardner 1985). The ARIMA equivalent and the additive-invertible region for each smoothing model are listed in the following sections.

Optimizing the Smoothing Weights

Smoothing weights are determined so as to minimize the sum of squared, one-step-ahead prediction errors. The optimization is initialized by choosing from a predetermined grid the initial smoothing weights that result in the smallest sum of squared, one-step-ahead prediction errors. The optimization process is highly dependent on this initialization. It is possible that the optimization process will fail due to the inability to obtain stable initial values for the smoothing weights (Greene 1993 and Judge et al. 1980), and it is possible for the optimization to result in a local minima.

The optimization process can result in weights to be chosen outside both the zero-to-one range and the ARIMA additive-invertible region. By restricting weight optimization to additive-invertible region, you can obtain a local minimum with stable predictions. Likewise, weight optimization can be restricted to the zero-to-one range or other ranges. It is also possible to fix certain weights to a specific value and optimize the remaining weights.

Standard Errors

The standard errors associated with the smoothing weights are calculated from the Hessian matrix of the sum of squared, one-step-ahead prediction errors with respect to the smoothing weights used in the optimization process.

Weights Near Zero or One

Sometimes the optimization process results in weights near zero or one.

For simple or double (Brown) exponential smoothing, a level weight near zero implies that simple differencing of the time series might be appropriate.

For linear (Holt) exponential smoothing, a level weight near zero implies that the smoothed trend is constant and that an ARIMA model with deterministic trend might be a more appropriate model.

For damped-trend linear exponential smoothing, a damping weight near one implies that linear (Holt) exponential smoothing might be a more appropriate model.

For Winters method and seasonal exponential smoothing, a seasonal weight near one implies that a nonseasonal model might be more appropriate and a seasonal weight near zero implies that deterministic seasonal factors might be present.

Equations for the Smoothing Models

Simple Exponential Smoothing

The model equation for simple exponential smoothing is

$$Y_t = \mu_t + \epsilon_t$$

The smoothing equation is

$$L_t = \alpha Y_t + (1 - \alpha)L_{t-1}$$

The error-correction form of the smoothing equation is

$$L_t = L_{t-1} + \alpha e_t$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t$$

The ARIMA model equivalency to simple exponential smoothing is the ARIMA(0,1,1) model

$$(1 - B)Y_t = (1 - \theta B)\epsilon_t$$

$$\theta = 1 - \alpha$$

The moving-average form of the equation is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} \alpha \epsilon_{t-j}$$

For simple exponential smoothing, the additive-invertible region is

$$\{0 < \alpha < 2\}$$

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} \alpha^2 \right] = \text{var}(\epsilon_t)(1 + (k-1)\alpha^2)$$

Double (Brown) Exponential Smoothing

The model equation for double exponential smoothing is

$$Y_t = \mu_t + \beta_t t + \epsilon_t$$

The smoothing equations are

$$\begin{aligned} L_t &= \alpha Y_t + (1 - \alpha)L_{t-1} \\ T_t &= \alpha(L_t - L_{t-1}) + (1 - \alpha)T_{t-1} \end{aligned}$$

This method can be equivalently described in terms of two successive applications of simple exponential smoothing:

$$\begin{aligned} S_t^{[1]} &= \alpha Y_t + (1 - \alpha)S_{t-1}^{[1]} \\ S_t^{[2]} &= \alpha S_t^{[1]} + (1 - \alpha)S_{t-1}^{[2]} \end{aligned}$$

where $S_t^{[1]}$ are the smoothed values of Y_t , and $S_t^{[2]}$ are the smoothed values of $S_t^{[1]}$. The prediction equation then takes the form:

$$\hat{Y}_t(k) = (2 + \alpha k / (1 - \alpha))S_t^{[1]} - (1 + \alpha k / (1 - \alpha))S_t^{[2]}$$

The error-correction forms of the smoothing equations are

$$\begin{aligned} L_t &= L_{t-1} + T_{t-1} + \alpha e_t \\ T_t &= T_{t-1} + \alpha^2 e_t \end{aligned}$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t + ((k-1) + 1/\alpha)T_t$$

The ARIMA model equivalency to double exponential smoothing is the ARIMA(0,2,2) model,

$$(1 - B)^2 Y_t = (1 - \theta B)^2 \epsilon_t$$

$$\theta = 1 - \alpha$$

The moving-average form of the equation is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} (2\alpha + (j-1)\alpha^2) \epsilon_{t-j}$$

For double exponential smoothing, the additive-invertible region is

$$\{0 < \alpha < 2\}$$

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} (2\alpha + (j-1)\alpha^2)^2 \right]$$

Linear (Holt) Exponential Smoothing

The model equation for linear exponential smoothing is

$$Y_t = \mu_t + \beta_t t + \epsilon_t$$

The smoothing equations are

$$L_t = \alpha Y_t + (1 - \alpha)(L_{t-1} + T_{t-1})$$

$$T_t = \gamma(L_t - L_{t-1}) + (1 - \gamma)T_{t-1}$$

The error-correction form of the smoothing equations is

$$L_t = L_{t-1} + T_{t-1} + \alpha e_t$$

$$T_t = T_{t-1} + \alpha \gamma e_t$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t + kT_t$$

The ARIMA model equivalency to linear exponential smoothing is the ARIMA(0,2,2) model,

$$(1 - B)^2 Y_t = (1 - \theta_1 B - \theta_2 B^2) \epsilon_t$$

$$\theta_1 = 2 - \alpha - \alpha \gamma$$

$$\theta_2 = \alpha - 1$$

The moving-average form of the equation is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} (\alpha + j\alpha\gamma)\epsilon_{t-j}$$

For linear exponential smoothing, the additive-invertible region is

$$\{0 < \alpha < 2\}$$

$$\{0 < \gamma < 4/\alpha - 2\}$$

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} (\alpha + j\alpha\gamma)^2 \right]$$

Damped-Trend Linear Exponential Smoothing

The model equation for damped-trend linear exponential smoothing is

$$Y_t = \mu_t + \beta_t t + \epsilon_t$$

The smoothing equations are

$$L_t = \alpha Y_t + (1 - \alpha)(L_{t-1} + \phi T_{t-1})$$

$$T_t = \gamma(L_t - L_{t-1}) + (1 - \gamma)\phi T_{t-1}$$

The error-correction form of the smoothing equations is

$$L_t = L_{t-1} + \phi T_{t-1} + \alpha e_t \quad T_t = \phi T_{t-1} + \alpha \gamma e_t$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t + \sum_{i=1}^k \phi^i T_t$$

The ARIMA model equivalency to damped-trend linear exponential smoothing is the ARIMA(1,1,2) model,

$$(1 - \phi B)(1 - B)Y_t = (1 - \theta_1 B - \theta_2 B^2)\epsilon_t$$

$$\theta_1 = 1 + \phi - \alpha - \alpha\gamma\phi$$

$$\theta_2 = (\alpha - 1)\phi$$

The moving-average form of the equation (assuming $|\phi| < 1$) is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} (\alpha + \alpha\gamma\phi(\phi^j - 1)/(\phi - 1))\epsilon_{t-j}$$

For damped-trend linear exponential smoothing, the additive-invertible region is

$$\{0 < \alpha < 2\}$$

$$\{0 < \phi\gamma < 4/\alpha - 2\}$$

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} (\alpha + \alpha\gamma\phi(\phi^j - 1)/(\phi - 1))^2 \right]$$

Seasonal Exponential Smoothing

The model equation for seasonal exponential smoothing is

$$Y_t = \mu_t + s_p(t) + \epsilon_t$$

The smoothing equations are

$$L_t = \alpha(Y_t - S_{t-p}) + (1 - \alpha)L_{t-1}$$

$$S_t = \delta(Y_t - L_t) + (1 - \delta)S_{t-p}$$

The error-correction form of the smoothing equations is

$$L_t = L_{t-1} + \alpha e_t$$

$$S_t = S_{t-p} + \delta(1 - \alpha)e_t$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t + S_{t-p+k}$$

The ARIMA model equivalency to seasonal exponential smoothing is the $\text{ARIMA}(0,1,p+1)(0,1,0)_p$ model,

$$(1 - B)(1 - B^p)Y_t = (1 - \theta_1 B - \theta_2 B^p - \theta_3 B^{p+1})\epsilon_t$$

$$\theta_1 = 1 - \alpha$$

$$\theta_2 = 1 - \delta(1 - \alpha)$$

$$\theta_3 = (1 - \alpha)(\delta - 1)$$

The moving-average form of the equation is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} \psi_j \epsilon_{t-j}$$

$$\psi_j = \begin{cases} \alpha & \text{for } j \bmod p \neq 0 \\ \alpha + \delta(1 - \alpha) & \text{for } j \bmod p = 0 \end{cases}$$

For seasonal exponential smoothing, the additive-invertible region is

$$\{\max(-p\alpha, 0) < \delta(1 - \alpha) < (2 - \alpha)\}$$

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} \psi_j^2 \right]$$

Multiplicative Seasonal Smoothing

In order to use the multiplicative version of seasonal smoothing, the time series and all predictions must be strictly positive.

The model equation for the multiplicative version of seasonal smoothing is

$$Y_t = \mu_t s_p(t) + \epsilon_t$$

The smoothing equations are

$$\begin{aligned} L_t &= \alpha(Y_t/S_{t-p}) + (1 - \alpha)L_{t-1} \\ S_t &= \delta(Y_t/L_t) + (1 - \delta)S_{t-p} \end{aligned}$$

The error-correction form of the smoothing equations is

$$\begin{aligned} L_t &= L_{t-1} + \alpha e_t / S_{t-p} \\ S_t &= S_{t-p} + \delta(1 - \alpha) e_t / L_t \end{aligned}$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t S_{t-p+k}$$

The multiplicative version of seasonal smoothing does not have an ARIMA equivalent; however, when the seasonal variation is small, the ARIMA additive-invertible region of the additive version of seasonal described in the preceding section can approximate the stability region of the multiplicative version.

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[\sum_{i=0}^{\infty} \sum_{j=0}^{p-1} (\psi_{j+ip} S_{t+k} / S_{t+k-j})^2 \right]$$

where ψ_j are as described for the additive version of seasonal method, and $\psi_j = 0$ for $j \geq k$.

Winters Method—Additive Version

The model equation for the additive version of Winters method is

$$Y_t = \mu_t + \beta_t t + s_p(t) + \epsilon_t$$

The smoothing equations are

$$L_t = \alpha(Y_t - S_{t-p}) + (1 - \alpha)(L_{t-1} + T_{t-1})$$

$$T_t = \gamma(L_t - L_{t-1}) + (1 - \gamma)T_{t-1}$$

$$S_t = \delta(Y_t - L_t) + (1 - \delta)S_{t-p}$$

The error-correction form of the smoothing equations is

$$L_t = L_{t-1} + T_{t-1} + \alpha e_t$$

$$T_t = T_{t-1} + \alpha \gamma e_t$$

$$S_t = S_{t-p} + \delta(1 - \alpha)e_t$$

(Note: For missing values, $e_t = 0$.)

The k -step prediction equation is

$$\hat{Y}_t(k) = L_t + kT_t + S_{t-p+k}$$

The ARIMA model equivalency to the additive version of Winters method is the $\text{ARIMA}(0,1,p+1)(0,1,0)_p$ model,

$$(1 - B)(1 - B^p)Y_t = \left[1 - \sum_{i=1}^{p+1} \theta_i B^i \right] \epsilon_t$$

$$\theta_j = \begin{cases} 1 - \alpha - \alpha\gamma & j = 1 \\ -\alpha\gamma & 2 \leq j \leq p - 1 \\ 1 - \alpha\gamma - \delta(1 - \alpha) & j = p \\ (1 - \alpha)(\delta - 1) & j = p + 1 \end{cases}$$

The moving-average form of the equation is

$$Y_t = \epsilon_t + \sum_{j=1}^{\infty} \psi_j \epsilon_{t-j}$$

$$\psi_j = \begin{cases} \alpha + j\alpha\gamma & \text{for } j \bmod p \neq 0 \\ \alpha + j\alpha\gamma + \delta(1 - \alpha), & \text{for } j \bmod p = 0 \end{cases}$$

For the additive version of Winters method (see Archibald 1990), the additive-invertible region is

$$\{\max(-p\alpha, 0) < \delta(1 - \alpha) < (2 - \alpha)\}$$

$$\{0 < \alpha\gamma < 2 - \alpha - \delta(1 - \alpha)(1 - \cos(\vartheta))\}$$

where ϑ is the smallest nonnegative solution to the equations listed in Archibald (1990).

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[1 + \sum_{j=1}^{k-1} \psi_j^2 \right]$$

Winters Method—Multiplicative Version

In order to use the multiplicative version of Winters method, the time series and all predictions must be strictly positive.

The model equation for the multiplicative version of Winters method is

$$Y_t = (\mu_t + \beta_t t) s_p(t) + \epsilon_t$$

The smoothing equations are

$$\begin{aligned} L_t &= \alpha(Y_t/S_{t-p}) + (1 - \alpha)(L_{t-1} + T_{t-1}) \\ T_t &= \gamma(L_t - L_{t-1}) + (1 - \gamma)T_{t-1} \\ S_t &= \delta(Y_t/L_t) + (1 - \delta)S_{t-p} \end{aligned}$$

The error-correction form of the smoothing equations is

$$\begin{aligned} L_t &= L_{t-1} + T_{t-1} + \alpha e_t / S_{t-p} \\ T_t &= T_{t-1} + \alpha \gamma e_t / S_{t-p} \\ S_t &= S_{t-p} + \delta(1 - \alpha) e_t / L_t \end{aligned}$$

NOTE: For missing values, $e_t = 0$.

The k -step prediction equation is

$$\hat{Y}_t(k) = (L_t + kT_t)S_{t-p+k}$$

The multiplicative version of Winters method does not have an ARIMA equivalent; however, when the seasonal variation is small, the ARIMA additive-invertible region of the additive version of Winters method described in the preceding section can approximate the stability region of the multiplicative version.

The variance of the prediction errors is estimated as

$$\text{var}(e_t(k)) = \text{var}(\epsilon_t) \left[\sum_{i=0}^{\infty} \sum_{j=0}^{p-1} (\psi_{j+ip} S_{t+k} / S_{t+k-j})^2 \right]$$

where ψ_j are as described for the additive version of Winters method and $\psi_j = 0$ for $j \geq k$.

ARIMA Models

Autoregressive integrated moving-average (ARIMA) models predict values of a dependent time series with a linear combination of its own past values, past errors (also called shocks or innovations), and current and past values of other time series (predictor time series).

The Time Series Forecasting System uses the ARIMA procedure of SAS/ETS software to fit and forecast ARIMA models. The maximum likelihood method is used for parameter estimation. Refer to Chapter 7, “The ARIMA Procedure,” for details of ARIMA model estimation and forecasting.

This section summarizes the notation used for ARIMA models.

Notation for ARIMA Models

A dependent time series that is modeled as a linear combination of its own past values and past values of an error series is known as a (pure) ARIMA model.

Nonseasonal ARIMA Model Notation

The order of an ARIMA model is usually denoted by the notation $\text{ARIMA}(p,d,q)$, where

p	is the order of the autoregressive part.
d	is the order of the differencing (rarely should $d > 2$ be needed).
q	is the order of the moving-average process.

Given a dependent time series $\{Y_t : 1 \leq t \leq n\}$, mathematically the ARIMA model is written as

$$(1 - B)^d Y_t = \mu + \frac{\theta(B)}{\phi(B)} a_t$$

where

t	indexes time.
μ	is the mean term.
B	is the backshift operator; that is, $BX_t = X_{t-1}$.
$\phi(B)$	is the autoregressive operator, represented as a polynomial in the back shift operator: $\phi(B) = 1 - \phi_1 B - \dots - \phi_p B^p$.
$\theta(B)$	is the moving-average operator, represented as a polynomial in the back shift operator: $\theta(B) = 1 - \theta_1 B - \dots - \theta_q B^q$.
a_t	is the independent disturbance, also called the random error.

For example, the mathematical form of the ARIMA(1,1,2) model is

$$(1 - B)Y_t = \mu + \frac{(1 - \theta_1 B - \theta_2 B^2)}{(1 - \phi_1 B)} a_t$$

Seasonal ARIMA Model Notation

Seasonal ARIMA models are expressed in factored form by the notation $\text{ARIMA}(p, d, q)(P, D, Q)_s$, where

P	is the order of the seasonal autoregressive part.
D	is the order of the seasonal differencing (rarely should $D > 1$ be needed).
Q	is the order of the seasonal moving-average process.
s	is the length of the seasonal cycle.

Given a dependent time series $\{Y_t : 1 \leq t \leq n\}$, mathematically the ARIMA seasonal model is written as

$$(1 - B)^d (1 - B^s)^D Y_t = \mu + \frac{\theta(B)\theta_s(B^s)}{\phi(B)\phi_s(B^s)} a_t$$

where

$\phi_s(B^s)$	is the seasonal autoregressive operator, represented as a polynomial in the back shift operator: $\phi_s(B^s) = 1 - \phi_{s,1} B^s - \dots - \phi_{s,P} B^{sP}$
$\theta_s(B^s)$	is the seasonal moving-average operator, represented as a polynomial in the back shift operator: $\theta_s(B^s) = 1 - \theta_{s,1} B^s - \dots - \theta_{s,Q} B^{sQ}$

For example, the mathematical form of the $\text{ARIMA}(1,0,1)(1,1,2)_{12}$ model is

$$(1 - B^{12})Y_t = \mu + \frac{(1 - \theta_1 B)(1 - \theta_{s,1} B^{12} - \theta_{s,2} B^{24})}{(1 - \phi_1 B)(1 - \phi_{s,1} B^{12})} a_t$$

Abbreviated Notation for ARIMA Models

If the differencing order, autoregressive order, or moving-average order is zero, the notation is further abbreviated as

$I(d)(D)_s$	integrated model or $\text{ARIMA}(0, d, 0)(0, D, 0)$
$\text{AR}(p)(P)_s$	autoregressive model or $\text{ARIMA}(p, 0, 0)(P, 0, 0)$
$\text{IAR}(p, d)(P, D)_s$	integrated autoregressive model or $\text{ARIMA}(p, d, 0)(P, D, 0)_s$
$\text{MA}(q)(Q)_s$	moving average model or $\text{ARIMA}(0, 0, q)(0, 0, Q)_s$
$\text{IMA}(d, q)(D, Q)_s$	integrated moving average model or $\text{ARIMA}(0, d, q)(0, D, Q)_s$
$\text{ARMA}(p, q)(P, Q)_s$	autoregressive moving-average model or $\text{ARIMA}(p, 0, q)(P, 0, Q)_s$.

Notation for Transfer Functions

A transfer function can be used to filter a predictor time series to form a dynamic regression model.

Let Y_t be the dependent series, let X_t be the predictor series, and let $\Psi(B)$ be a linear filter or transfer function for the effect of X_t on Y_t . The ARIMA model is then

$$(1 - B)^d (1 - B^s)^D Y_t = \mu + \Psi(B) (1 - B)^d (1 - B^s)^D X_t + \frac{\theta(B)\theta_s(B^s)}{\phi(B)\phi_s(B^s)} a_t$$

This model is called a *dynamic regression* of Y_t on X_t .

Nonseasonal Transfer Function Notation

Given the i th predictor time series $\{X_{i,t} : 1 \leq t \leq n\}$, the transfer function is written as

$$\text{Dif}(d_i)\text{Lag}(k_i)\text{N}(q_i)/\text{D}(p_i)$$

where

d_i	is the simple order of the differencing for the i th predictor time series, $(1 - B)^{d_i} X_{i,t}$ (rarely should $d_i > 2$ be needed).
k_i	is the pure time delay (lag) for the effect of the i th predictor time series, $X_{i,t} B^{k_i} = X_{i,t-k_i}$.
p_i	is the simple order of the denominator for the i th predictor time series.
q_i	is the simple order of the numerator for the i th predictor time series.

The mathematical notation used to describe a transfer function is

$$\Psi_i(B) = \frac{\omega_i(B)}{\delta_i(B)} (1 - B)^{d_i} B^{k_i}$$

where

B	is the backshift operator; that is, $BX_t = X_{t-1}$.
$\delta_i(B)$	is the denominator polynomial of the transfer function for the i th predictor time series: $\delta_i(B) = 1 - \delta_{i,1}B - \dots - \delta_{i,p_i}B^{p_i}$.
$\omega_i(B)$	is the numerator polynomial of the transfer function for the i th predictor time series: $\omega_i(B) = 1 - \omega_{i,1}B - \dots - \omega_{i,q_i}B^{q_i}$.

The numerator factors for a transfer function for a predictor series are like the MA part of the ARMA model for the noise series. The denominator factors for a transfer function for a predictor series are like the AR part of the ARMA model for the noise series. Denominator factors introduce exponentially weighted, infinite distributed lags into the transfer function.

For example, the transfer function for the i th predictor time series with

$k_i = 3$	time lag is 3
$d_i = 1$	simple order of differencing is one
$p_i = 1$	simple order of the denominator is one
$q_i = 2$	simple order of the numerator is two

would be written as [Dif(1)Lag(3)N(2)/D(1)]. The mathematical notation for the transfer function in this example is

$$\Psi_i(B) = \frac{(1 - \omega_{i,1}B - \omega_{i,2}B^2)}{(1 - \delta_{i,1}B)}(1 - B)B^3$$

Seasonal Transfer Function Notation

The general transfer function notation for the i th predictor time series $X_{i,t}$ with seasonal factors is [Dif(d_i)(D_i)_s Lag(k_i) N(q_i)(Q_i)_s/ D(p_i)(P_i)_s] where

D_i	is the seasonal order of the differencing for the i th predictor time series (rarely should $D_i > 1$ be needed).
P_i	is the seasonal order of the denominator for the i th predictor time series (rarely should $P_i > 2$ be needed).
Q_i	is the seasonal order of the numerator for the i th predictor time series, (rarely should $Q_i > 2$ be needed).
s	is the length of the seasonal cycle.

The mathematical notation used to describe a seasonal transfer function is

$$\Psi_i(B) = \frac{\omega_i(B)\omega_{s,i}(B^s)}{\delta_i(B)\delta_{s,i}(B^s)}(1 - B)^{d_i}(1 - B^s)^{D_i}B^{k_i}$$

where

$\delta_{s,i}(B^s)$	is the denominator seasonal polynomial of the transfer function for the i th predictor time series: $\delta_{s,i}(B) = 1 - \delta_{s,i,1}B - \dots - \delta_{s,i,P_i}B^{sP_i}$
$\omega_{s,i}(B^s)$	is the numerator seasonal polynomial of the transfer function for the i th predictor time series: $\omega_{s,i}(B) = 1 - \omega_{s,i,1}B - \dots - \omega_{s,i,Q_i}B^{sQ_i}$

For example, the transfer function for the i th predictor time series $X_{i,t}$ whose seasonal cycle $s = 12$ with

$d_i = 2$	simple order of differencing is two
$D_i = 1$	seasonal order of differencing is one
$q_i = 2$	simple order of the numerator is two
$Q_i = 1$	seasonal order of the numerator is one

would be written as $[\text{Dif}(2)(1)_s \text{N}(2)(1)_s]$. The mathematical notation for the transfer function in this example is

$$\Psi_i(B) = (1 - \omega_{i,1}B - \omega_{i,2}B^2)(1 - \omega_{s,i,1}B^{12})(1 - B)^2(1 - B^{12})$$

Note: In this case, $[\text{Dif}(2)(1)_s \text{N}(2)(1)_s] = [\text{Dif}(2)(1)_s \text{Lag}(0)\text{N}(2)(1)_s/\text{D}(0)(0)_s]$.

Predictor Series

This section discusses time trend curves, seasonal dummies, interventions, and adjustments.

Time Trend Curves

When you specify a time trend curve as a predictor in a forecasting model, the system computes a predictor series that is a deterministic function of time. This variable is then included in the model as a regressor, and the trend curve is fit to the dependent series by linear regression, in addition to other predictor series.

Some kinds of nonlinear trend curves are fit by transforming the dependent series. For example, the exponential trend curve is actually a linear time trend fit to the logarithm of the series. For these trend curve specifications, the series transformation option is set automatically, and you cannot independently control both the time trend curve and transformation option.

The computed time trend variable is included in the output data set in a variable named in accordance with the trend curve type. Let t represent the observation count from the start of the period of fit for the model, and let X_t represent the value of the time trend variable at observation t within the period of fit. The names and definitions of these variables are as follows. (Note: These deterministic variables are reserved variable names.)

Linear trend	variable name <code>_LINEAR_</code> , with $X_t = t - c$
Quadratic trend	variable name <code>_QUAD_</code> , with $X_t = (t - c)^2$. Note that a quadratic trend implies a linear trend as a special case and results in two regressors: <code>_QUAD_</code> and <code>_LINEAR_</code> .
Cubic trend	variable name <code>_CUBE_</code> , with $X_t = (t - c)^3$. Note that a cubic trend implies a quadratic trend as a special case and results in three regressors: <code>_CUBE_</code> , <code>_QUAD_</code> , and <code>_LINEAR_</code> .
Logistic trend	variable name <code>_LOGIT_</code> , with $X_t = t$. The model is a linear time trend applied to the logistic transform of the dependent series. Thus, specifying a logistic trend is equivalent to specifying the logistic series transformation and a linear time trend. A logistic trend predictor can be used only in conjunction with the logistic transformation, which is set automatically when you specify logistic trend.
Logarithmic trend	variable name <code>_LOG_</code> , with $X_t = \ln(t)$

Exponential trend	variable name <code>_EXP_</code> , with $X_t = t$. The model is a linear time trend applied to the logarithms of the dependent series. Thus, specifying an exponential trend is equivalent to specifying the log series transformation and a linear time trend. An exponential trend predictor can be used only in conjunction with the log transformation, which is set automatically when you specify exponential trend.
Hyperbolic trend	variable name <code>_HYP_</code> , with $X_t = 1/t$
Power curve trend	variable name <code>_POW_</code> , with $X_t = \ln(t)$. The model is a logarithmic time trend applied to the logarithms of the dependent series. Thus, specifying a power curve is equivalent to specifying the log series transformation and a logarithmic time trend. A power curve predictor can be used only in conjunction with the log transformation, which is set automatically when you specify a power curve trend.
EXP(A+B/TIME) trend	variable name <code>_ERT_</code> , with $X_t = 1/t$. The model is a hyperbolic time trend applied to the logarithms of the dependent series. Thus, specifying this trend curve is equivalent to specifying the log series transformation and a hyperbolic time trend. This trend curve can be used only in conjunction with the log transformation, which is set automatically when you specify this trend.

Intervention Effects

Interventions are used for modeling events that occur at specific times. That is, they are known changes that affect the dependent series or outliers.

The i th intervention series is included in the output data set with variable name `_INTVi_`, which is a reserved variable name.

Point Interventions

The point intervention is a one-time event. The i th intervention series $X_{i,t}$ has a point intervention at time t_{int} when the series is nonzero only at time t_{int} —that is,

$$X_{i,t} = \begin{cases} 1, & t = t_{int} \\ 0, & \text{otherwise} \end{cases}$$

Step Interventions

Step interventions are continuing, and the input time series flags periods after the intervention. For a step intervention, before time t_{int} , the i th intervention series $X_{i,t}$ is zero and then steps to a constant level thereafter—that is,

$$X_{i,t} = \begin{cases} 1, & t \geq t_{int} \\ 0, & \text{otherwise} \end{cases}$$

Ramp Interventions

A ramp intervention is a continuing intervention that increases linearly after the intervention time. For a ramp intervention, before time t_{int} , the i th intervention series $X_{i,t}$ is zero and increases linearly thereafter—that is, proportional to time.

$$X_{i,t} = \begin{cases} t - t_{int}, & t \geq t_{int} \\ 0, & \text{otherwise} \end{cases}$$

Intervention Effect

Given the i th intervention series $X_{i,t}$, you can define how the intervention takes effect by filters (transfer functions) of the form

$$\Psi_i(B) = \frac{1 - \omega_{i,1}B - \dots - \omega_{i,q_i}B^{q_i}}{1 - \delta_{i,1}B - \dots - \delta_{i,p_i}B^{p_i}}$$

where B is the backshift operator $By_t = y_{t-1}$.

The denominator of the transfer function determines the decay pattern of the intervention effect, whereas the numerator terms determine the size of the intervention effect time window.

For example, the following intervention effects are associated with the respective transfer functions.

Immediately	$\Psi_i(B) = 1$
Gradually	$\Psi_i(B) = 1/(1 - \delta_{i,1}B)$
1 lag window	$\Psi_i(B) = 1 - \omega_{i,1}B$
3 lag window	$\Psi_i(B) = 1 - \omega_{i,1}B - \omega_{i,2}B^2 - \omega_{i,3}B^3$

Intervention Notation

The notation used to describe intervention effects has the form *type* : t_{int} (q_i)/(p_i), where *type* is point, step, or ramp; t_{int} is the time of the intervention (for example, OCT87); q_i is the transfer function numerator order; and p_i is the transfer function denominator order. If $q_i = 0$, the part “(q_i)” is omitted; if $p_i = 0$, the part “/(p_i)” is omitted.

In the Intervention Specification window, the **Number of Lags** option specifies the transfer function numerator order q_i , and the **Effect Decay Pattern** option specifies the transfer function denominator order p_i . In the **Effect Decay Pattern** options, values and resulting p_i are: **None**, $p_i = 0$; **Exp**, $p_i = 1$; **Wave**, $p_i = 2$.

For example, a step intervention with date 08MAR90 and effect pattern **Exp** is denoted “Step:08MAR90/(1)” and has a transfer function filter $\Psi_i(B) = 1/(1 - \delta_1 B)$. A ramp intervention immediately applied on 08MAR90 is denoted “Ramp:08MAR90” and has a transfer function filter $\Psi_i(B) = 1$.

Seasonal Dummy Inputs

For a seasonal cycle of length s , the seasonal dummy regressors include

$$\{X_{i,t} : 1 \leq i \leq (s-1), 1 \leq t \leq n\}$$

for models that include an intercept term and

$$\{X_{i,t} : 1 \leq i \leq s, 1 \leq t \leq n\}$$

for models that exclude an intercept term. Each element of a seasonal dummy regressor is either zero or one, based on the following rule:

$$X_{i,t} = \begin{cases} 1, & \text{when } i = t \pmod{s} \\ 0, & \text{otherwise} \end{cases}$$

Note that if the model includes an intercept term, the number of seasonal dummy regressors is one less than s to ensure that the linear system is full rank.

The seasonal dummy variables are included in the output data set with variable names prefixed with “SDUMMY i ” and sequentially numbered. They are reserved variable names.

Series Diagnostic Tests

This section describes the diagnostic tests that are used to determine the kinds of forecasting models appropriate for a series.

The series diagnostics are a set of heuristics that provide recommendations on whether or not the forecasting model should contain a log transform, trend terms, and seasonal terms. These recommendations are used by the automatic model selection process to restrict the model search to a subset of the model selection list. (You can disable this behavior by using the Automatic Model Selection Options window.)

The tests that are used by the series diagnostics do not always produce the correct classification of the series. They are intended to accelerate the process of searching for a good forecasting model for the series, but you should not rely on them if finding the very best model is important to you.

If you have information about the appropriate kinds of forecasting models (perhaps from studying the plots and autocorrelations shown in the Series Viewer window), you can set the series diagnostic flags in the Series Diagnostics window. Select the YES, NO, or MAYBE values for the `Log Transform`, `Trend`, and `Seasonality` options in the Series Diagnostics window as you think appropriate.

The series diagnostics tests are intended as a heuristic tool only, and no statistical validity is claimed for them. These tests might be modified and enhanced in future releases of the Time Series Forecasting System. The testing strategy is as follows:

1. **Log transform test.** The log test fits a high-order autoregressive model to the series and to the log of the series and compares goodness-of-fit measures for the prediction errors of the two models. If this test finds that log transforming the series is suitable, the `Log Transform` option is set to YES, and the subsequent diagnostic tests are performed on the log transformed series.
2. **Trend test.** The resultant series is tested for presence of a trend by using an augmented Dickey-Fuller test and a random walk with drift test. If either test finds that the series appears to have a trend, the `Trend` option is set to YES, and the subsequent diagnostic tests are performed on the differenced series.
3. **Seasonality test.** The resultant series is tested for seasonality. A seasonal dummy model with AR(1) errors is fit and the joint significance of the seasonal dummy estimates is tested. If the seasonal dummies are significant, the AIC statistic for this model is compared to the AIC for and AR(1) model without seasonal dummies. If the AIC for the seasonal model is lower than that of the nonseasonal model, the `Seasonal` option is set to YES.

Statistics of Fit

This section explains the goodness-of-fit statistics reported to measure how well different models fit the data. The statistics of fit for the various forecasting models can be viewed or stored in a data set by using the Model Viewer window.

Statistics of fit are computed by using the actual and forecasted values for observations in the period of evaluation. One-step forecasted values are used whenever possible, including the case when a hold-out sample contains no missing values. If a one-step forecast for an observation cannot be computed due to missing values for previous series observations, a multi-step forecast is computed, using the minimum number of steps as the previous nonmissing values in the data range permit.

The various statistics of fit reported are as follows. In these formulas, n is the number of nonmissing observations and k is the number of fitted parameters in the model.

Number of Nonmissing Observations.

The number of nonmissing observations used to fit the model.

Number of Observations.

The total number of observations used to fit the model, including both missing and nonmissing observations.

Number of Missing Actuals.

The number of missing actual values.

Number of Missing Predicted Values.

The number of missing predicted values.

Number of Model Parameters.

The number of parameters fit to the data. For combined forecast, this is the number of forecast components.

Total Sum of Squares (Uncorrected).

The total sum of squares for the series, SST, uncorrected for the mean: $\sum_{t=1}^n y_t^2$.

Total Sum of Squares (Corrected).

The total sum of squares for the series, SST, corrected for the mean: $\sum_{t=1}^n (y_t - \bar{y})^2$, where \bar{y} is the series mean.

Sum of Square Errors.

The sum of the squared prediction errors, SSE. $SSE = \sum_{t=1}^n (y_t - \hat{y}_t)^2$, where \hat{y} is the one-step predicted value.

Mean Squared Error.

The mean squared prediction error, MSE, calculated from the one-step-ahead forecasts. $MSE = \frac{1}{n} SSE$. This formula enables you to evaluate small hold-out samples.

Root Mean Squared Error.

The root mean square error (RMSE), \sqrt{MSE} .

Mean Absolute Percent Error.

The mean absolute percent prediction error (MAPE), $\frac{100}{n} \sum_{t=1}^n |(y_t - \hat{y}_t)/y_t|$.

The summation ignores observations where $y_t = 0$.

Mean Absolute Error.

The mean absolute prediction error, $\frac{1}{n} \sum_{t=1}^n |y_t - \hat{y}_t|$.

R-Square.

The R^2 statistic, $R^2 = 1 - SSE/SST$. If the model fits the series badly, the model error sum of squares, SSE, can be larger than SST and the R^2 statistic will be negative.

Adjusted R-Square.

The adjusted R^2 statistic, $1 - (\frac{n-1}{n-k})(1 - R^2)$.

Amemiya's Adjusted R-Square.

Amemiya's adjusted R^2 , $1 - (\frac{n+k}{n-k})(1 - R^2)$.

Random Walk R-Square.

The random walk R^2 statistic (Harvey's R^2 statistic by using the random walk model for comparison), $1 - (\frac{n-1}{n})SSE/RWSSE$, where $RWSSE = \sum_{t=2}^n (y_t - y_{t-1} - \mu)^2$, and $\mu = \frac{1}{n-1} \sum_{t=2}^n (y_t - y_{t-1})$.

Akaike's Information Criterion.

Akaike's information criterion (AIC), $n \ln(MSE) + 2k$.

Schwarz Bayesian Information Criterion.

Schwarz Bayesian information criterion (SBC or BIC), $n \ln(MSE) + k \ln(n)$.

Amemiya's Prediction Criterion.

Amemiya's prediction criterion, $\frac{1}{n} SST(\frac{n+k}{n-k})(1 - R^2) = (\frac{n+k}{n-k})\frac{1}{n} SSE$.

Maximum Error.

The largest prediction error.

Minimum Error.

The smallest prediction error.

Maximum Percent Error.

The largest percent prediction error, $100 \max((y_t - \hat{y}_t)/y_t)$. The summation ignores observations where $y_t = 0$.

Minimum Percent Error.

The smallest percent prediction error, $100 \min((y_t - \hat{y}_t)/y_t)$. The summation ignores observations where $y_t = 0$.

Mean Error.

The mean prediction error, $\frac{1}{n} \sum_{t=1}^n (y_t - \hat{y}_t)$.

Mean Percent Error.

The mean percent prediction error, $\frac{100}{n} \sum_{t=1}^n \frac{(y_t - \hat{y}_t)}{y_t}$. The summation ignores observations where $y_t = 0$.

References

- Akaike, H. (1974), "A New Look at the Statistical Model Identification," *IEEE Transaction on Automatic Control*, AC-19, 716–723.
- Aldrin, M. and Damsleth, E. (1989), "Forecasting Nonseasonal Time Series with Missing Observations," *Journal of Forecasting*, 8, 97–116.
- Anderson, T.W. (1971), *The Statistical Analysis of Time Series*, New York: John Wiley & Sons.
- Ansley, C. (1979), "An Algorithm for the Exact Likelihood of a Mixed Autoregressive Moving-Average Process," *Biometrika*, 66, 59.
- Ansley, C. and Newbold, P. (1980), "Finite Sample Properties of Estimators for Autoregressive Moving-Average Models," *Journal of Econometrics*, 13, 159.
- Archibald, B.C. (1990), "Parameter Space of the Holt-Winters Model," *International Journal of Forecasting*, 6, 199–209.
- Bartolomei, S.M. and Sweet, A.L. (1989), "A Note on the Comparison of Exponential Smoothing Methods for Forecasting Seasonal Series," *International Journal of Forecasting*, 5, 111–116.
- Bhansali, R.J. (1980), "Autoregressive and Window Estimates of the Inverse Correlation Function," *Biometrika*, 67, 551–566.
- Bowerman, B.L. and O'Connell, R.T. (1979), *Time Series and Forecasting: An Applied Approach*, North Scituate, Massachusetts: Duxbury Press.
- Box, G.E.P. and Cox D.R. (1964), "An Analysis of Transformations," *Journal of Royal Statistical Society B*, No. 26, 211–243.
- Box, G.E.P. and Jenkins, G.M. (1976), *Time Series Analysis: Forecasting and Control*, Revised Edition, San Francisco: Holden-Day.
- Box, G.E.P. and Tiao, G.C. (1975), "Intervention Analysis with Applications to Economic and Environmental Problems," *JASA*, 70, 70–79.
- Brocklebank, J.C. and Dickey, D.A. (1986), *SAS System for Forecasting Time Series, 1986 Edition*, Cary, North Carolina: SAS Institute Inc.
- Brown, R.G. (1962), *Smoothing, Forecasting, and Prediction of Discrete Time Series*, New York: Prentice-Hall.

- Brown, R.G. and Meyer, R.F. (1961), "The Fundamental Theorem of Exponential Smoothing," *Operations Research*, 9, 673–685.
- Chatfield, C. (1978), "The Holt-Winters Forecasting Procedure," *Applied Statistics*, 27, 264–279.
- Chatfield, C., and Prothero, D.L. (1973), "Box-Jenkins Seasonal Forecasting: Problems in a Case Study," *Journal of the Royal Statistical Society, Series A*, 136, 295–315.
- Chatfield, C. and Yar, M. (1988), "Holt-Winters Forecasting: Some Practical Issues," *The Statistician*, 37, 129–140.
- Chatfield, C. and Yar, M. (1991), "Prediction Intervals for Multiplicative Holt-Winters," *International Journal of Forecasting*, 7, 31–37.
- Cogger, K.O. (1974), "The Optimality of General-Order Exponential Smoothing," *Operations Research*, 22, 858.
- Cox, D. R. (1961), "Prediction by Exponentially Weighted Moving Averages and Related Methods," *Journal of the Royal Statistical Society, Series B*, 23, 414–422.
- Davidson, J. (1981), "Problems with the Estimation of Moving-Average Models," *Journal of Econometrics*, 16, 295.
- Dickey, D. A., and Fuller, W.A. (1979), "Distribution of the Estimators for Autoregressive Time Series with a Unit Root," *Journal of the American Statistical Association*, 74(366), 427–431.
- Dickey, D. A., Hasza, D. P., and Fuller, W.A. (1984), "Testing for Unit Roots in Seasonal Time Series," *Journal of the American Statistical Association*, 79(386), 355–367.
- Fair, R.C. (1986), "Evaluating the Predictive Accuracy of Models," in *Handbook of Econometrics*, Vol. 3., Griliches, Z. and Intriligator, M.D., eds., New York: North Holland.
- Fildes, R. (1979), "Quantitative Forecasting—the State of the Art: Extrapolative Models," *Journal of Operational Research Society*, 30, 691–710.
- Fuller, W.A. (1976), *Introduction to Statistical Time Series*, New York: John Wiley & Sons.
- Gardner, E.S., Jr. (1984), "The Strange Case of the Lagging Forecasts," *Interfaces*, 14, 47–50.
- Gardner, E.S., Jr. (1985), "Exponential Smoothing: the State of the Art," *Journal of Forecasting*, 4, 1–38.
- Granger, C.W.J. and Newbold, P. (1977), *Forecasting Economic Time Series*, New York: Academic Press, Inc.
- Greene, W.H. (1993), *Econometric Analysis*, Second Edition, New York: Macmillan Publishing Company.
- Hamilton, J. D. (1994), *Time Series Analysis*, Princeton: Princeton University Press.
- Harvey, A.C. (1981), *Time Series Models*, New York: John Wiley & Sons.
- Harvey, A.C. (1984), "A Unified View of Statistical Forecasting Procedures," *Journal of Forecasting*, 3, 245–275.

Hopewood, W.S., McKeown, J.C., and Newbold, P. (1984), "Time Series Forecasting Models Involving Power Transformations," *Journal of Forecasting*, Vol 3, No. 1, 57–61.

Jones, Richard H. (1980), "Maximum Likelihood Fitting of ARMA Models to Time Series with Missing Observations," *Technometrics*, 22, 389–396.

Judge, G.G., Griffiths, W.E., Hill, R.C., and Lee, T.C. (1980), *The Theory and Practice of Econometrics*, New York: John Wiley & Sons.

Ledolter, J. and Abraham, B. (1984), "Some Comments on the Initialization of Exponential Smoothing," *Journal of Forecasting*, 3, 79–84.

Ljung, G.M. and Box, G.E.P. (1978), "On a Measure of Lack of Fit in Time Series Models," *Biometrika*, 65, 297–303.

Makridakis, S., Wheelwright, S.C., and McGee, V.E. (1983), *Forecasting: Methods and Applications*, Second Edition, New York: John Wiley & Sons.

McKenzie, Ed (1984), "General Exponential Smoothing and the Equivalent ARMA Process," *Journal of Forecasting*, 3, 333–344.

McKenzie, Ed (1986), "Error Analysis for Winters' Additive Seasonal Forecasting System," *International Journal of Forecasting*, 2, 373–382.

Montgomery, D.C. and Johnson, L.A. (1976), *Forecasting and Time Series Analysis*, New York: McGraw-Hill.

Morf, M., Sidhu, G.S., and Kailath, T. (1974), "Some New Algorithms for Recursive Estimation on Constant Linear Discrete Time Systems," *I.E.E.E. Transactions on Automatic Control*, AC-19, 315–323.

Nelson, C.R. (1973), *Applied Time Series for Managerial Forecasting*, San Francisco: Holden-Day.

Newbold, P. (1981), "Some Recent Developments in Time Series Analysis," *International Statistical Review*, 49, 53–66.

Newton, H. Joseph and Pagano, Marcello (1983), "The Finite Memory Prediction of Covariance Stationary Time Series," *SIAM Journal of Scientific and Statistical Computing*, 4, 330–339.

Pankratz, Alan (1983), *Forecasting with Univariate Box-Jenkins Models: Concepts and Cases*, New York: John Wiley & Sons.

Pankratz, Alan (1991), *Forecasting with Dynamic Regression Models*, New York: John Wiley & Sons.

Pankratz, A. and Dudley, U. (1987), "Forecast of Power-Transformed Series," *Journal of Forecasting*, Vol 6, No. 4, 239–248.

Pearlman, J.G. (1980), "An Algorithm for the Exact Likelihood of a High-Order Autoregressive Moving-Average Process," *Biometrika*, 67, 232–233.

Priestly, M.B. (1981), *Spectral Analysis and Time Series, Volume 1: Univariate Series*, New York: Academic Press, Inc.

- Roberts, S.A. (1982), "A General Class of Holt-Winters Type Forecasting Models," *Management Science*, 28, 808–820.
- Schwarz, G. (1978), "Estimating the Dimension of a Model," *Annals of Statistics*, 6, 461–464.
- Sweet, A.L. (1985), "Computing the Variance of the Forecast Error for the Holt-Winters Seasonal Models," *Journal of Forecasting*, 4, 235–243.
- Winters, P.R. (1960), "Forecasting Sales by Exponentially Weighted Moving Averages," *Management Science*, 6, 324–342.
- Yar, M. and Chatfield, C. (1990), "Prediction Intervals for the Holt-Winters Forecasting Procedure," *International Journal of Forecasting*, 6, 127–137.
- Woodfield, T.J. (1987), "Time Series Intervention Analysis Using SAS Software," *Proceedings of the Twelfth Annual SAS Users Group International Conference*, 331–339. Cary, NC: SAS Institute Inc.

Part V

Investment Analysis

Chapter 51

Overview

Contents

About Investment Analysis	3135
Starting Investment Analysis	3136
Getting Help	3137
Using Help	3137
Software Requirements	3138

About Investment Analysis

The Investment Analysis system is an interactive environment for the time-value of money of a variety of investments:

- loans
- savings
- depreciations
- bonds
- generic cashflows

Various analyses are provided to help analyze the value of investment alternatives: time value, periodic equivalent, internal rate of return, benefit-cost ratio, and breakeven analysis.

These analyses can help answer a number of questions you may have about your investments:

- Which option is more profitable or less costly?
- Is it better to buy or rent?
- Are the extra fees for refinancing at a lower interest rate justified?
- What is the balance of this account after saving this amount periodically for so many years?
- How much is legally tax-deductible?

- Is this a reasonable price?

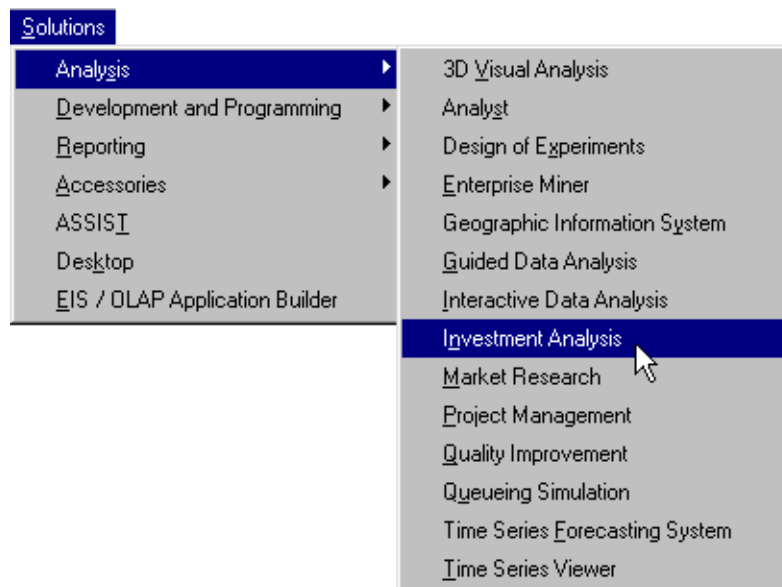
Investment Analysis can be beneficial to users in many industries for a variety of decisions:

- manufacturing: cost justification of automation or any capital investment, replacement analysis of major equipment, or economic comparison of alternative designs
- government: setting funds for services
- finance: investment analysis and portfolio management for fixed-income securities

Starting Investment Analysis

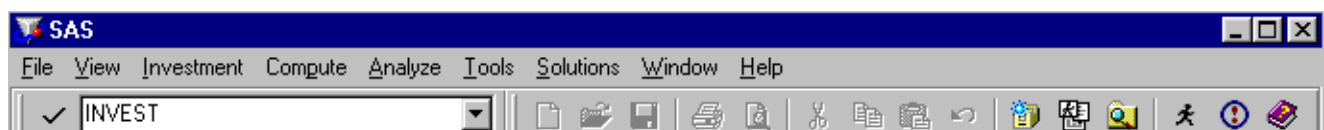
There are two ways to invoke Investment Analysis from the main SAS window. One way is to select **Solutions** → **Analysis** → **Investment Analysis** from the main SAS menu, as displayed in Figure 51.1.

Figure 51.1 Initializing Investment Analysis with the Menu Bar



The other way is to type **INVEST** into the toolbar's command prompt, as displayed in Figure 51.2.

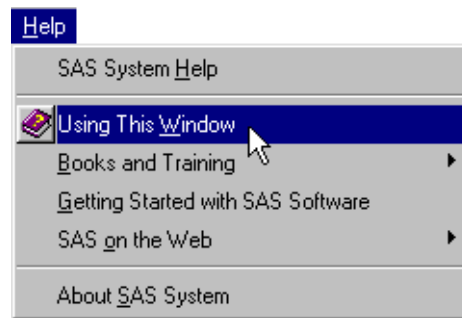
Figure 51.2 Initializing Investment Analysis with the Toolbar



Getting Help

You can get help in Investment Analysis in three ways. One way is to use the Help Menu, as displayed in Figure 51.3. This is the right-most menu item on the menu bar.

Figure 51.3 The Help Menu



Help buttons, as in Figure 51.4, provide another way to access help. Most dialog boxes provide help buttons in their lower-right corners.

Figure 51.4 A Help Button



Also, the toolbar has a button (see Figure 51.5) that invokes the help system. This is the right-most icon on the toolbar.

Figure 51.5 The Help Icon



Each of these methods invokes a browser that gives specific help for the active window.

Using Help

The chapters pertaining to Investment Analysis in this document typically have a section that introduces you to a menu and summarizes the options available through the menu. Such chapters then have sections titled Task and Dialog Box Guides. The Task section provides a description of how to perform many useful tasks. The Dialog Box Guide lists all dialog boxes pertinent to those tasks and gives a brief description of each element of each dialog box.

Software Requirements

Investment Analysis uses the following SAS software:

- Base SAS
- SAS/ETS
- SAS/GRAPH (optional, to view bond pricing and breakeven graphs)

Chapter 52

Portfolios


Contents

The File Menu	3139
Tasks	3140
Creating a New Portfolio	3140
Saving a Portfolio	3141
Opening an Existing Portfolio	3141
Saving a Portfolio to a Different Name	3142
Selecting Investments within a Portfolio	3143
Dialog and Utility Guide	3144
Investment Analysis	3144
Menu Bar Options	3145
Right-Clicking within the Portfolio Area	3145

The File Menu

Investment Analysis stores portfolios as catalog entries. Portfolios contain a collection of investments, providing a structure to collect investments with a common purpose or goal (like a retirement or building fund portfolio). It may be advantageous also to collect investments into a common portfolio if they are competing investments you want to perform a comparative analysis upon. Within this structure you can perform computations and analyses on a collection of investments in a portfolio, just as you would perform them on a single investment.

Investment Analysis provides many tools to aid in your manipulation of portfolios through the **File** menu, shown in [Figure 52.1](#).

Figure 52.1 File Menu

The **File** menu offers the following items:

New Portfolio creates an empty portfolio with a new name.

Open Portfolio opens the standard SAS Open dialog box where you select a portfolio to open.

Save Portfolio saves the current portfolio to its current name.

Save Portfolio As opens the standard SAS Save As dialog box where you supply a new portfolio name for the current portfolio.

Close closes Investment Analysis.

Exit closes SAS (Windows only).

Tasks

Creating a New Portfolio

From the Investment Analysis dialog box, select **File** → **New Portfolio**.

Figure 52.2 Creating a New Portfolio

The screenshot shows a window titled "Investment Analysis". Inside, there are two text input fields: "Portfolio Name:" with the value "WORK.INVEST.INVEST1" and "Portfolio Description:" with the value "Default portfolio". Below these is a table with the following structure:

Portfolio		
Name	Label	Type

The table has a scrollbar on the right side, indicating it can hold multiple rows.

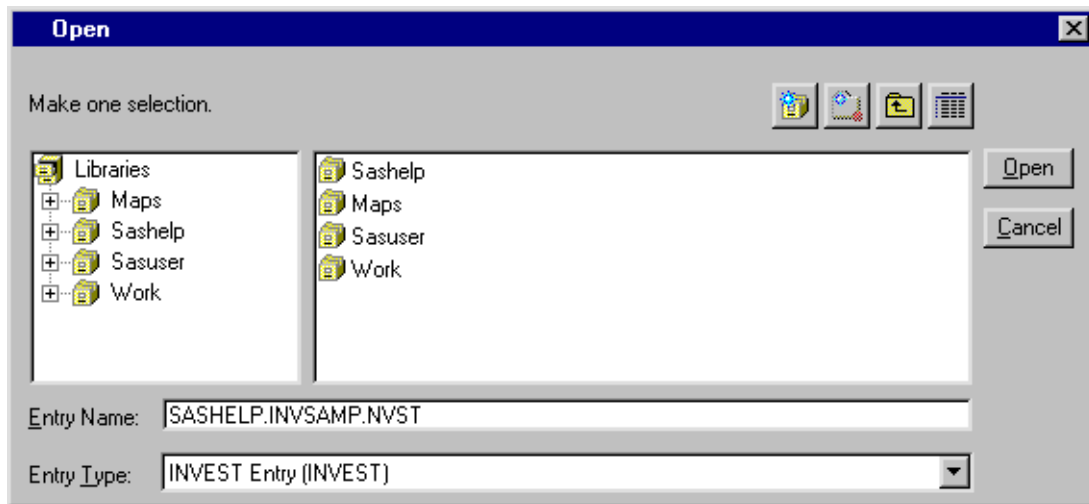
The **Portfolio Name** is WORK.INVEST.INVEST1 as displayed in Figure 52.2, unless you have saved a portfolio to that name in the past. In that case, some other unused portfolio name is given to the new portfolio.

Saving a Portfolio

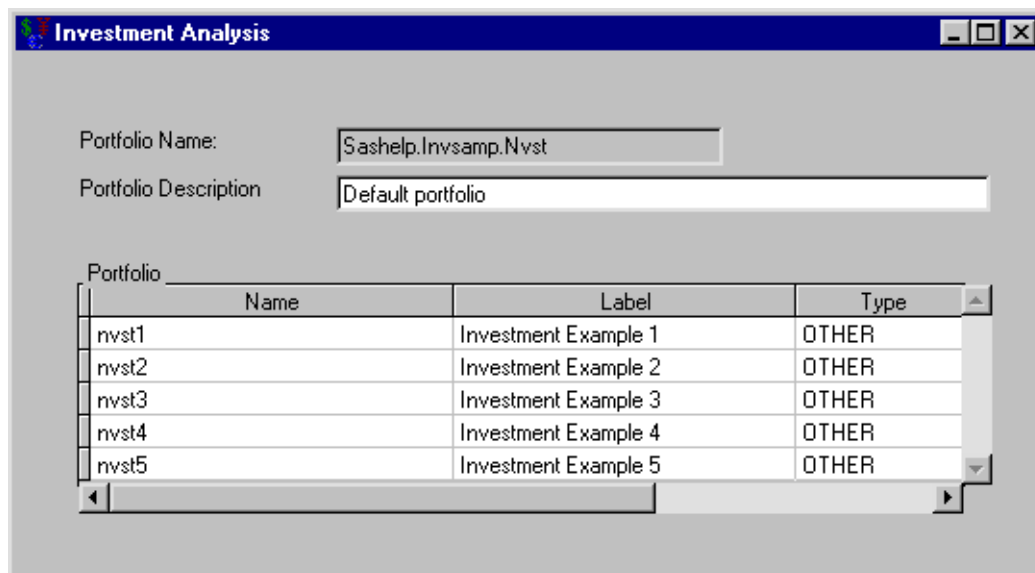
From the Investment Analysis dialog box, select **File** → **Save Portfolio**. The portfolio is saved to a catalog-entry with the name in the **Portfolio Name** box.

Opening an Existing Portfolio

From the Investment Analysis dialog box, select **File** → **Open Portfolio**. This opens the standard SAS Open dialog box. You enter the name of a SAS portfolio to open in the **Entry Name** box. For example, enter SASHELP.INVSAMP.NVST as displayed in Figure 52.3.

Figure 52.3 Opening an Existing Portfolio

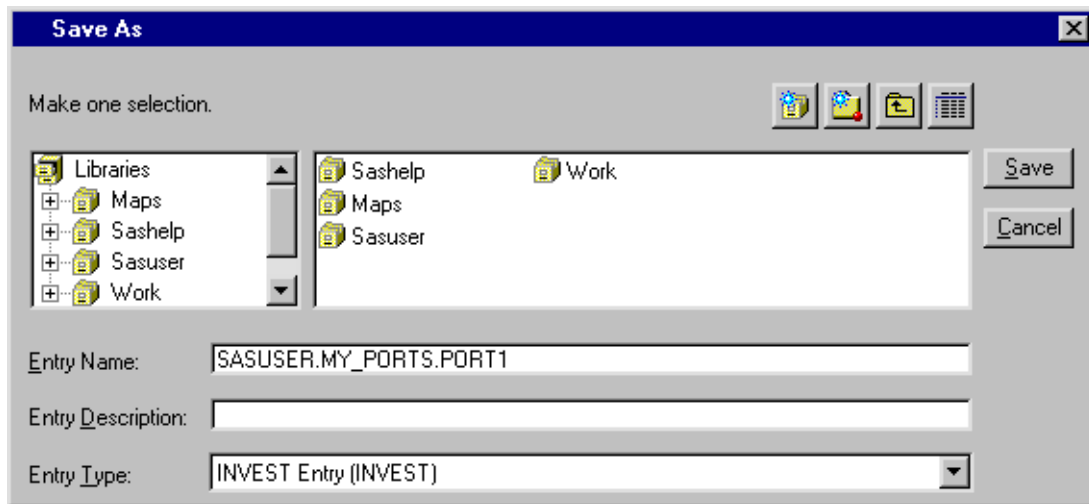
Click **Open** to load the portfolio. The portfolio should look like Figure 52.4.

Figure 52.4 The Opened Portfolio

Saving a Portfolio to a Different Name

From the Investment Analysis dialog box, select **File** → **Save Portfolio As**.

This opens the standard SAS Save As dialog box. You can enter the name of a SAS portfolio into the **Entry Name** box. For example, enter SASUSER.MY_PORTS.PORT1, as in Figure 52.5.

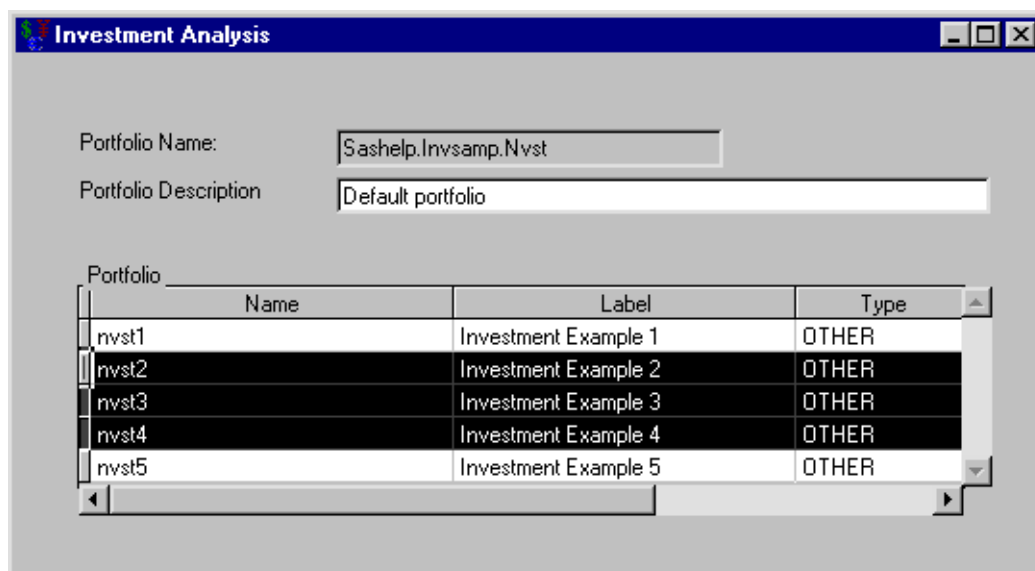
Figure 52.5 Saving a Portfolio to a Different Name

Click **Save** to save the portfolio.

Selecting Investments within a Portfolio

To select a single investment in an opened portfolio, click the investment in the Portfolio area within the Investment Analysis dialog box.

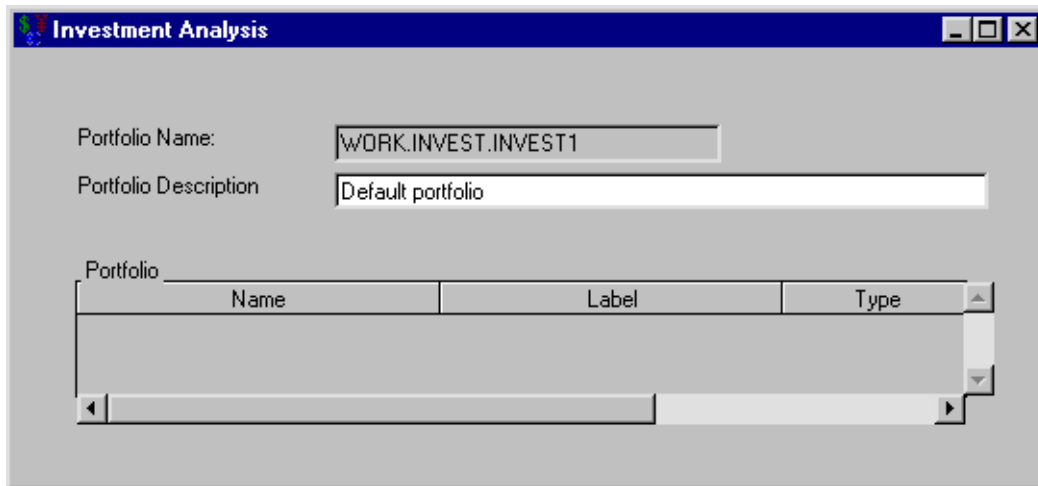
To select a list of adjacent investments, do the following: click the first investment, hold down SHIFT, and click the final investment. After the list of investments is selected, you can release the SHIFT key. The selected investments will appear highlighted as in Figure 52.6.

Figure 52.6 Selecting Investments within a Portfolio

Dialog and Utility Guide

Investment Analysis

Figure 52.7 Investment Analysis Dialog Box



Investment Portfolio Name holds the name of the portfolio. The name is of the form `library.catalog_entry.portfolio`. The default portfolio name is `work.invest.invest1`, as in [Figure 52.7](#).

Portfolio Description provides a more descriptive explanation of the portfolio's contents. You can edit this description any time this dialog box is active.

The **Portfolio** area contains the list of investments comprising the particular portfolio. Each investment in the **Portfolio** area displays the following attributes:

Name is the name of the investment. It must be a valid SAS name. It is used to distinguish investments when performing analyses and computations.


Label is a place where you can provide a more descriptive explanation of the investment.

Type is the type of investment, which is fixed when you create the investment. It is one of the following: LOAN, SAVINGS, DEPRECIATION, BOND, or OTHER.

Additional tools to aid in the management of your portfolio are available by selecting from the [menu bar](#) or by [right-clicking](#) within the **Portfolio** area.

Menu Bar Options

Figure 52.8 The Menu Bar



The menu bar (shown in [Figure 52.8](#)) provides many tools to aid in the management of portfolios and the investments that comprise them. The following menu items provide functionality particular to Investment Analysis:

File opens and saves portfolios.

Investment creates new investments within the portfolio.


Compute performs constant dollar, after tax, and currency conversion computations on generic cashflows.

Analyze analyzes investments to aid in decision-making.

Tools sets default values of inflation and income tax rates.

Right-Clicking within the Portfolio Area

Figure 52.9 Right-Clicking



After selecting an investment, right-clicking in the **Portfolio** area pops up a menu (see [Figure 52.9](#)) that offers the following options:

Edit opens the selected investment within the portfolio.

Duplicate creates a duplicate of the selected investment within the portfolio.

Delete removes the selected investment from the portfolio.

If you wish to perform one of these actions on a collection of investments, you must select a collection of investments (as described in the section “[Selecting Investments within a Portfolio](#)” on page 3143) before right-clicking.

Chapter 53

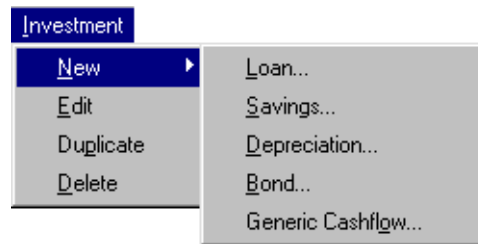
Investments

Contents

The Investment Menu	3147
Tasks	3149
Loan Tasks	3149
Specifying Savings Terms to Create an Account Summary	3156
Depreciation Tasks	3157
Bond Tasks	3160
Generic Cashflow Tasks	3164
Dialog Box Guide	3171
Loan	3171
Loan Initialization Options	3173
Loan Prepayments	3174
Balloon Payments	3175
Rate Adjustment Terms	3175
Rounding Off	3177
Savings	3177
Depreciation	3179
Depreciation Table	3181
Bond	3181
Bond Analysis	3183
Bond Price	3185
Generic Cashflow	3185
Right-Clicking within Generic Cashflow's Cashflow Specification Area	3186
Flow Specification	3188
Forecast Specification	3189

The Investment Menu

Because there are many types of investments, a tool that manages and analyzes collections of investments must be robust and flexible. Providing specifications for four specific investment types and one generic type, Investment Analysis can model almost any real-world investment.

Figure 53.1 Investment Menu

The **Investment** menu, shown in [Figure 53.1](#), offers the following items:

New → **Loan** opens the [Loan](#) dialog box. Loans are useful for acquiring capital to pursue various interests. Available terms include rate adjustments for variable rate loans, initialization costs, prepayments, and balloon payments.

New → **Savings** opens the [Savings](#) dialog box. Savings are necessary when planning for the future, whether for business or personal purposes. Account summary calculations available per deposit include starting balance, deposits, interest earned, and ending balance.

New → **Depreciation** opens the [Depreciation](#) dialog box. Depreciations are relevant in tax calculation. The available depreciation methods are Straight Line, Sum-of-years Digits, Depreciation Table, and Declining Balance. Depreciation Tables are necessary when depreciation calculations must conform to set yearly percentages. Declining Balance with conversion to Straight Line is also provided.

New → **Bond** opens the [Bond](#) dialog box. Bonds have widely varying terms depending on the issuer. Because bond issuers frequently auction their bonds, the ability to price a bond between the issue date and maturity date is desirable. Fixed-coupon bonds may be analyzed for the following: price versus yield-to-maturity, duration, and convexity. These are available at different times in the bond's life.

New → **Generic Cashflow** opens the [Generic Cashflow](#) dialog box. Generic cashflows are the most flexible investments. Only a sequence of date-amount pairs is necessary for specification. You can enter date-amount pairs and load values from SAS data sets to specify any type of investment. You can generate uniform, arithmetic, and geometric cashflows with ease. SAS's forecasting ability is available to forecast future cashflows as well. The new graphical display aids in visualization of the cashflow and enables the user to change the frequency of the cashflow view to aggregate and disaggregate the view.

Edit opens the specification dialog box for an investment selected within the portfolio.

Duplicate creates a duplicate of an investment selected within the portfolio.

Delete removes an investment selected from the portfolio.

If you want to edit, duplicate, or delete a collection of investments, you must select a collection of investments as described in the section "[Selecting Investments within a Portfolio](#)" on page 3143 before performing the menu-option.

Tasks

Loan Tasks

Suppose you want to buy a home that costs \$100,000. You can make a down payment of \$20,000. Hence, you need a loan of \$80,000. You are able to acquire a 30-year loan at 7% interest starting January 1, 2000. Let's use Investment Analysis to specify and analyze this loan.

In the Investment Analysis dialog box, select **Investment** → **New** → **Loan** from the menu bar to open the Loan dialog box.

Specifying Loan Terms to Create an Amortization Schedule

You must specify the loan before generating the amortization table. To specify the loan, follow these steps:

1. Enter MORTGAGE for the **Name**.
2. Enter 80000 for the **Loan Amount**.
3. Enter 7 for the **Initial Rate**.
4. Enter 360 for the **Number of Payments**.
5. Enter 01JAN2000 for the **Start Date**.

After you have specified the loan, click **Create Amortization Schedule** to generate the amortization schedule displayed in [Figure 53.2](#).

Figure 53.2 Creating an Amortization Schedule

The 'Loan' dialog box is shown with the following fields and values:

- Name: MORTGAGE
- Loan Specification:
 - Loan Amount: 80000
 - Initial Rate: 7.00
 - Periodic Payment: (empty)
 - Start Date: 01JAN2000
 - Number of Payments: 360
 - Payment Interval: MONTH
 - Compounding Interval: MONTH
- Buttons on the right: Initialization..., Prepayments..., Balloon Payments..., Rate Adjustments..., Rounding Off...
- Buttons at the bottom: Save Data As..., OK, Cancel, Help
- Amortization Schedule table:

Date	Beginning Principal Amount	Periodic Payment Amount	Interest Payment	Principal Rep
JAN2000	80000.00	0.00	0.00	0.00
FEB2000	80000.00	532.24	466.67	65.57
MAR2000	79934.43	532.24	466.28	65.96
APR2000	79868.47	532.24	465.90	66.34

Storing Other Loan Terms

Let's include information concerning the purchase price and downpayment. These terms are not necessary to specify the loan, but it may be advantageous to store such information with the loan.

Consider the loan described in the section “[Loan Tasks](#)” on page 3149. In the Loan dialog box ([Figure 53.2](#)) click **Initialization** to open the Loan Initialization Options dialog box, where you can specify the down payment, initialization costs, and discount points. To specify the down payment, enter 100000 for the **Purchase Price**, as shown in [Figure 53.3](#).

Figure 53.3 Including the Purchase Price

Loan Initialization Options

Price, Loan Amount and Downpayment

Purchase Price:	<input type="text" value="100000"/>		
Loan Amount:	<input type="text" value="80000"/>	% of Price:	<input type="text" value="80.00"/>
Downpayment:	<input type="text" value="20000"/>	% of Price:	<input type="text" value="20.00"/>

Initialization Costs and Discount Points

Loan Amount:	<input type="text" value="80000"/>		
Initialization Costs:	<input type="text"/>	% of Amount:	<input type="text" value="0.00"/>
Discount Points:	<input type="text"/>	% of Amount:	<input type="text" value="0.00"/>

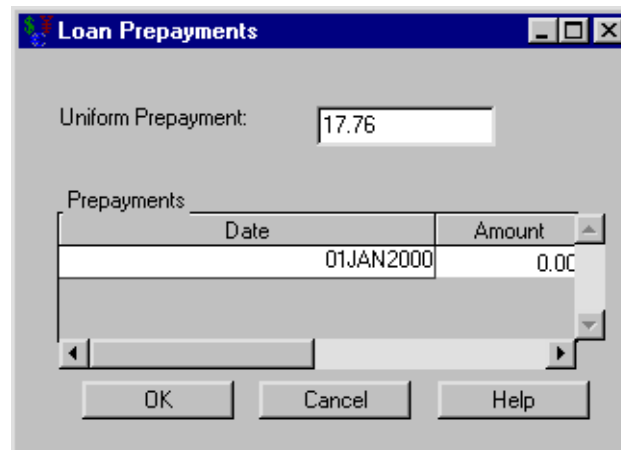
OK Cancel Help

Click **OK** to return to the Loan dialog box.

Adding Prepayments

Now let's observe the effect of prepayments on the loan. Consider the loan described in the section “[Loan Tasks](#)” on page 3149. You must pay a minimum of \$532.24 each month to keep up with payments. However, let's say you dislike entering this amount in your checkbook. You would rather pay \$550.00 to keep the arithmetic simpler. This would constitute a uniform prepayment of \$17.76 each month.

In the Loan dialog box, click **Prepayments**, which opens the Loan Prepayments dialog box shown in [Figure 53.4](#).

Figure 53.4 Specifying the Loan Prepayments

The screenshot shows a dialog box titled "Loan Prepayments". It contains a text box labeled "Uniform Prepayment:" with the value "17.76". Below this is a table titled "Prepayments" with two columns: "Date" and "Amount". The table has one row with the date "01JAN2000" and the amount "0.00". At the bottom of the dialog are three buttons: "OK", "Cancel", and "Help".

Date	Amount
01JAN2000	0.00

You can specify an arbitrary sequence of prepayments in the **Prepayments** area. If you want a uniform prepayment, clear the **Prepayments** area and enter the uniform payment amount in the **Uniform Prepayment** text box. That amount will be added to each payment until the loan is paid off.

To specify this uniform prepayment, follow these steps:

1. Enter 17.76 for the **Uniform Prepayment**.
2. Click **OK** to return to the Loan dialog box.
3. Click **Create Amortization Schedule**, and the amortization schedule is updated, as displayed in [Figure 53.5](#).

Figure 53.5 The Amortization Schedule with Loan Prepayments

The screenshot shows the 'Loan' dialog box with the following fields and buttons:

- Name:** MORTGAGE
- Loan Specification:**
 - Loan Amount:** 80000
 - Initial Rate:** 7.00
 - Periodic Payment:** (empty)
 - Start Date:** 01JAN2000
 - Number of Payments:** 360
 - Payment Interval:** MONTH
 - Compounding Interval:** MONTH
- Buttons:** Initialization..., Prepayments..., Balloon Payments..., Rate Adjustments..., Rounding Off...
- Amortization Schedule:**
 - Create Amortization Schedule** button
 - Table:**

Date	Beginning Principal Amount	Periodic Payment Amount	Interest Payment	Principal Rep
JAN2000	80000.00	0.00	0.00	0.00
FEB2000	80000.00	550.00	466.67	83.33
MAR2000	79916.67	550.00	466.18	83.82
APR2000	79832.85	550.00	465.69	84.31
- Bottom Buttons:** Save Data As..., OK, Cancel, Help

The last payment is on January 2030 without prepayments and February 2027 with prepayment; you would pay the loan off almost three years earlier with the \$17.76 prepayments.

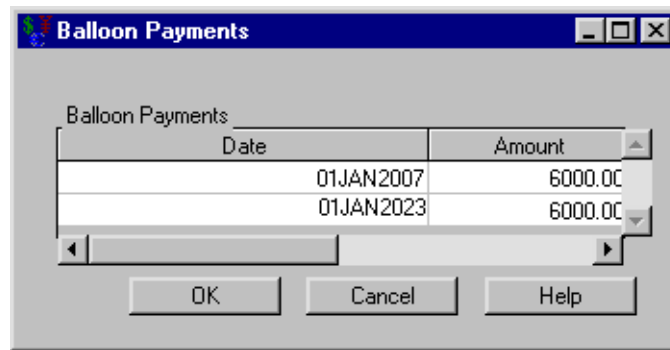
To continue this example you must remove the prepayments from the loan specification, following these steps:

1. Reopen the Loan Prepayments dialog box from the Loan dialog box by clicking **Prepayments**.
2. Enter 0 for **Uniform Prepayment**.
3. Click **OK** to return to the Loan dialog box.

Adding Balloon Payments

Consider the loan described in the section “[Loan Tasks](#)” on page 3149. Suppose you cannot afford the payments of \$532.24 each month. To lessen your monthly payment, you could pay balloon payments of \$6,000 at the end of 2007 and 2023. You wonder how this would affect your monthly payment. (Note that Investment Analysis does not allow both balloon payments and rate adjustments to be specified for a loan.)

In the Loan dialog box, click **Balloon Payments**, which opens the Balloon Payments dialog box shown in [Figure 53.6](#).

Figure 53.6 Defining Loan Balloon Payments

You can specify an arbitrary sequence of balloon payments by adding date-amount pairs to the **Balloon Payments** area.

To specify these balloon payments, follow these steps:

1. Right-click within the **Balloon Payment** area (which pops up a menu) and release on **New**.
2. Set the pair's **Date** to 01JAN2007.
3. Set **Amount** to 6000.
4. Right-click within the **Balloon Payment** area (which pops up a menu) and release on **New**.
5. Set the new pair's **Date** to 01JAN2023.
6. Set its **Amount** to 6000.

Click **OK** to return to the Loan dialog box. Click **Create Amortization Schedule**, and the amortization schedule is updated. Your monthly payment is now \$500.30, a difference of approximately \$32 each month.

To continue this example you must remove the balloon payments from the loan specification, following these steps:

1. Reopen the Balloon Payments dialog box.
2. Right-click within the **Balloon Payment** area (which pops up a menu) and release on **Clear**.
3. Click **OK** to return to the Loan dialog box.

Handling Rate Adjustments

Consider the loan described in the section “[Loan Tasks](#)” on page 3149. Another option for lowering your payments is to get a variable rate loan. You can acquire a three-year adjustable rate mortgage (ARM) at 6% with a periodic cap of 1% with a maximum of 9%. (Note that Investment Analysis does not allow both rate adjustments and balloon payments to be specified for a loan.)

In the Loan dialog box, click **Rate Adjustments** to open the Rate Adjustment Terms dialog box shown in [Figure 53.7](#).

Figure 53.7 Setting the Rate Adjustments

Rate Adjustment Terms:

Life Cap: 3.00

Periodic Cap: 1.00

Adjustment Frequency: 36 months

Rate Adjustment Assumption:

☒ Worst Case

☐ Best Case

☐ Fixed Case

☐ Estimated Case

Estimated Rates

Date	Rate
------	------

OK Cancel Help

To specify these loan adjustment terms, follow these steps:

1. Enter 3 for the **Life Cap**. The **Life Cap** is the maximum deviation from the Initial Rate.
2. Enter 1 for the **Periodic Cap**.
3. Enter 36 for the **Adjustment Frequency**.
4. Confirm that **Worst Case** is selected from the Rate Adjustment Assumption options.
5. Click **OK** to return to the Loan dialog box.
6. Enter 6 for the **Initial Rate**.
7. Click **Create Amortization Schedule**, and the amortization schedule is updated.

Your monthly payment drops to \$479.64 each month. However, if the worst-case scenario plays out, the payments will increase to \$636.84 in nine years. [Figure 53.8](#) displays amortization table information for the final few months under this scenario.

Figure 53.8 The Amortization Schedule with Rate Adjustments

The screenshot shows a 'Loan' dialog box with the following fields and buttons:

- Name:** untitled_loan
- Loan Specification:**
 - Loan Amount:** 80000
 - Initial Rate:** 6.00
 - Periodic Payment:** (empty)
 - Start Date:** 01JAN2000
 - Number of Payments:** 360
 - Payment Interval:** MONTH
 - Compounding Interval:** MONTH
- Buttons:** Initialization..., Prepayments..., Balloon Payments..., Rate Adjustments..., Rounding Off...
- Amortization Schedule:**
 - Create Amortization Schedule** button
 - Table:**

Date	Beginning Principal Amount	Periodic Payment Amount	Interest Payment	Principal Repay
AUG2029	3722.76	636.84	27.92	608.92
SEP2029	3113.84	636.84	23.35	613.49
OCT2029	2500.35	636.84	18.75	618.09
NOV2029	1882.26	636.84	14.12	622.72
DEC2029	1259.54	636.84	9.45	627.39
JAN2030	632.15	636.89	4.74	632.15
- Bottom Buttons:** Save Data As..., OK, Cancel, Help

Click **OK** to return to the Investment Analysis dialog box.

Specifying Savings Terms to Create an Account Summary

Suppose you put \$500 each month into an account that earns 6% interest for 20 years. What is the balance of the account after those 20 years?

In the Investment Analysis dialog box, select **Investment** → **New** → **Savings** from the menu bar to open the Savings dialog box.

To specify the savings, follow these steps:

1. Enter RETIREMENT for the **Name**.
2. Enter 500 for the **Periodic Deposit**.
3. Enter 240 for the **Number of Deposits**.
4. Enter 6 for the **Initial Rate**.

You must specify the savings before generating the account summary. After you have specified the savings, click **Create Account Summary** to compute the ending date and balance and to generate the account summary displayed in Figure 53.9.

Figure 53.9 Creating an Account Summary

The screenshot shows a 'Savings' dialog box with the following fields and values:

- Name: RETIREMENT
- Savings Specification:
 - Periodic Deposit: 500
 - Start Date: 01JAN2000
 - Number of Deposits: 240
 - Deposit Interval: MONTH
 - Initial Rate: 6.00
 - Compounding Interval: MONTH
- Ending Date: 01JAN2020
- Balance: 232175.54982
- Create Account Summary button
- Account Summary table:

Date	StartingBalance	Deposits	InterestEarned	EndingBalance
01JAN2000	0.00	500.00	0.00	500.00
01FEB2000	500.00	500.00	2.50	1002.50
01MAR2000	1002.50	500.00	5.01	1507.51
- Buttons: Save Data As..., OK, Cancel, Help

Click **OK** to return to the Investment Analysis dialog box.

Depreciation Tasks

Commercial assets are considered to lose value as time passes. For tax purposes, you want to quantify this loss. This investment structure helps calculate appropriate values.

Suppose you spend \$50,000 for a commercial fishing boat that is considered to have a ten-year useful life. How would you depreciate it?

In the Investment Analysis dialog box, select **Investment** → **New** → **Depreciation** from the menu bar to open the Depreciation dialog box.

Specifying Depreciation Terms to Create a Depreciation Table

To specify the depreciation, follow these steps:

1. Enter FISHING_BOAT for the **Name**.

2. Enter 50000 for the **Cost**.
3. Enter 2000 for the **Year of Purchase**.
4. Enter 10 for the **Useful Life**.
5. Enter 0 for the **Salvage Value**.

You must specify the depreciation before generating the depreciation schedule. After you have specified the depreciation, click **Create Depreciation Schedule** to generate a depreciation schedule like the one displayed in Figure 53.10.

Figure 53.10 Creating a Depreciation Schedule

Depreciation

Name:

Depreciable Asset Specification

Cost:

Year of Purchase:

Useful Life:

Salvage Value:

Depreciation Method

☐ Straight Line (SL)
☐ Sum-of-years-digits
☐ Depreciation Table....
☒ Declining Balance (DB)

DB Factor: ☒ 2 ☐ 1.5 ☐ 1

Conversion to SL: ☒ Yes ☐ No

Depreciation Schedule

Year	StartBookValue	Depreciation	EndBookValue
2000	50000.00	10000.00	40000.00
2001	40000.00	8000.00	32000.00
2002	32000.00	6400.00	25600.00
2003	25600.00	5120.00	20480.00
2004	20480.00	4096.00	16384.00

The default depreciation method is Declining Balance (with Conversion to Straight Line). Try the following methods to see how they each affect the schedule:

- Straight Line
- Sum-of-years Digits
- Declining Balance (without conversion to Straight Line)

It might be useful to compare the value of the boat at 5 years for each method.

A description of these methods is available in the section “[Depreciation Methods](#)” on page 3223.

Using the Depreciation Table

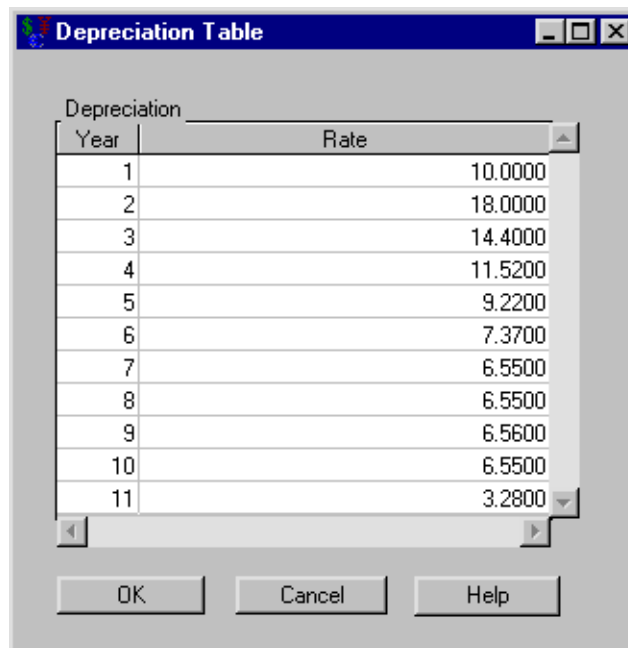
Sometimes you want to force the depreciation rates to be certain percentages each year. This option is particularly useful for calculating modified accelerated cost recovery system (MACRS) depreciations. The United States' Tax Reform Act of 1986 set depreciation rates for an asset based on an assumed lifetime for that asset. Since these lists of rates are important to many people, Investment Analysis provides SAS data sets for situations with yearly rates (using the “half-year convention”). Find them at `SASHELP.MACRS*` where * refers to the class of the property. For example, use `SASHELP.MACRS15` for a fifteen-year property. (When using the MACRS with the Tax Reform Act tables, you must set the **Salvage Value** to zero.)

Suppose you want to compute the depreciation schedule for the commercial fishing boat described in the section “[Depreciation Tasks](#)” on page 3157. The boat is a ten-year property according to the Tax Reform Act of 1986.

To employ the MACRS depreciation from the Depreciation dialog box, follow these steps:

1. Select the **Depreciation Table** option within the **Depreciation Method** area and click **OK**. This opens the Depreciation Table dialog box.
2. Right-click within the **Depreciation** area (which pops up a menu) and select **Load**.
3. Enter `SASHELP.MACRS10` for the **Dataset Name**. The dialog box should look like [Figure 53.11](#).

Figure 53.11 MACRS Percentages for a Ten-Year Property



Year	Rate
1	10.0000
2	18.0000
3	14.4000
4	11.5200
5	9.2200
6	7.3700
7	6.5500
8	6.5500
9	6.5600
10	6.5500
11	3.2800

Click **OK** to return to the Depreciation dialog box. Click **Create Depreciation Schedule** and the depreciation schedule fills (see [Figure 53.12](#)).

Note there are eleven entries in this depreciation schedule. This is because of the half-year convention that enables you to deduct one half of a year the first year which leaves a half year to deduct after the useful life

is over.

Figure 53.12 Depreciation Table with MACRS10

The screenshot shows a 'Depreciation' dialog box with the following fields and options:

- Name:** FISHING_BOAT
- Depreciable Asset Specification:**
 - Cost:** 50000
 - Year of Purchase:** 2000
 - Useful Life:** 10
 - Salvage Value:** 0
- Depreciation Method:**
 - ☐ Straight Line (SL)
 - ☐ Sum-of-years-digits
 - ☒ Depreciation Table....
 - ☐ Declining Balance (DB)
- DB Factor:** ☒ 2 ☐ 1.5 ☐ 1
- Conversion to SL:** ☒ Yes ☐ No
- Create Depreciation Schedule** (button)
- Depreciation Schedule Table:**

Year	StartBookValue	Depreciation	EndBookValue
2000	50000.00	5000.00	45000.00
2001	45000.00	9000.00	36000.00
2002	36000.00	7200.00	28800.00
2003	28800.00	5760.00	23040.00
2004	23040.00	4608.00	18432.00
- Buttons:** Save Data As..., OK, Cancel, Help

Click **OK** to return to the Investment Analysis dialog box.

Bond Tasks

Suppose someone offers to sell you a 20-year utility bond that was issued six years ago. It has a \$1,000 face value and pays semi-year coupons at 2%. You can purchase it for \$780. Would you be satisfied with this bond if you expect an 8% minimum attractive rate of return (MARR)?

In the Investment Analysis dialog box, select **Investment** → **New** → **Bond** from the menu bar to open the Bond dialog box.

Specifying Bond Terms

To specify the bond, follow these steps:

1. Enter UTILITY_BOND for the **Name**.
2. Enter 1000 for the **Face Value**.

3. Enter 2 for the **Coupon Rate**. The **Coupon Payment** updates to 20.
4. Select SEMIYEAR for **Coupon Interval**.
5. Enter 28 for the **Number of Coupons**. Because 14 years remain before the bond matures, the bond still has 28 semiyear coupons to pay. The **Maturity Date** updates.

Computing the Price from Yield

Enter 8 for **Yield** within the **Valuation** area. You see the bond's value would be \$666.72 as in [Figure 53.13](#).

Figure 53.13 Bond Value

The screenshot shows a 'Bond' dialog box with the following fields and values:

- Name:** UTILITY_BOND
- Bond Specification:**
 - Face Value:** 1000
 - Coupon Interval:** SEMIYEAR (dropdown menu)
 - Coupon Payment:** 20
 - Number of Coupons:** 28
 - Coupon Rate:** 2.00
 - Maturity Date:** 01JAN2014
- Valuation:**
 - Value:** 666.73873564
 - Yield:** 8.00

Buttons at the bottom include 'Analyze...', 'OK', 'Cancel', and 'Help'.

Computing the Yield from Price

Now enter 780 for **Value** within the **Valuation** area. You see the yield is only 6.5%, as in [Figure 53.14](#). This is not acceptable if you desire an 8% MARR.

Figure 53.14 Bond Yield

Bond

Name:

Bond Specification

Face Value: Coupon Interval:

Coupon Payment: Number of Coupons:

Coupon Rate: Maturity Date:

Valuation

Value:

Yield:

Analyze... OK Cancel Help

Performing Bond Analysis

To perform bond-pricing analysis, follow these steps:

1. Click **Analyze** to open the Bond Analysis dialog box.
2. Enter 8.0 as the **Yield to Maturity**.
3. Enter 4.0 as the **+/-**.
4. Enter 0.5 as the **Increment by**.
5. Enter 780 as the **Reference Price**.
6. Click **Create Bond Valuation Summary**.

The **Bond Valuation Summary** area fills and shows you the different values for various yields as in [Figure 53.15](#).

Figure 53.15 Bond Price Analysis

Bond Analysis

Analysis Specifications

Yield-to-Maturity: 8.00

+/-: 4.00

Increment By: 0.50

Reference Price: 780.00

Analysis Dates

Date

01JAN2000

Create Bond Valuation Summary

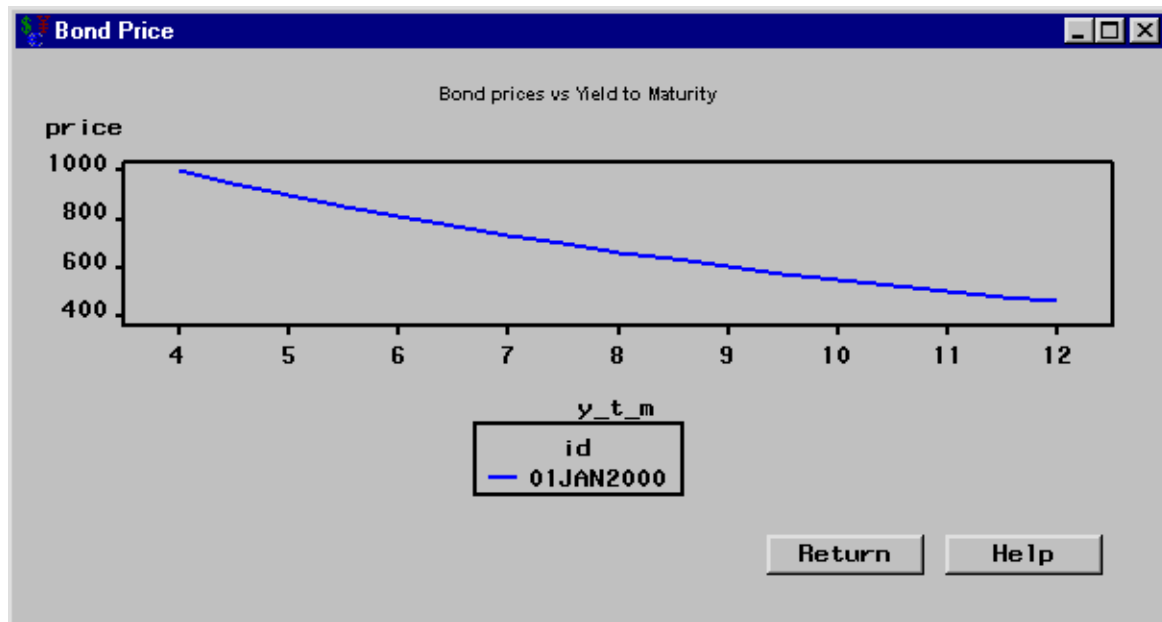
Bond Valuation Summary

Date	Yield	Value	PercentChange	Duration	Convexity
01JAN2000	12.00	463.75	-40.54	8.15	94.47
01JAN2000	11.50	484.13	-37.93	8.29	96.93
01JAN2000	11.00	505.75	-35.16	8.43	99.43

Graphics... Save Data As... Return Help

Creating a Price versus Yield-to-Maturity Graph

Click **Graphics** to open the Bond Price dialog box. This contains the price versus yield-to-maturity graph shown in Figure 53.16.

Figure 53.16 Bond Price Graph

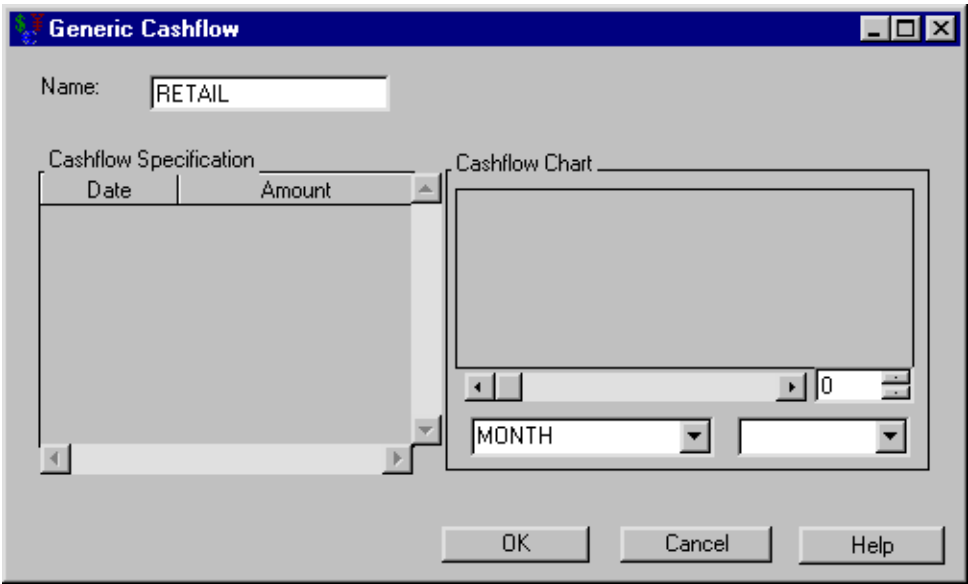
Click **Return** to return to the Bond Analysis dialog box. In the Bond Analysis dialog box, click **OK** to return to the Bond dialog box. In the Bond dialog box, click **OK** to return to the Investment Analysis dialog box.

Generic Cashflow Tasks

To specify a generic cashflow, you merely define any sequence of date-amount pairs. The flexibility of generic cashflows enables the user to represent economic alternatives or investments that do not fit into loan, savings, depreciation, or bond specifications.

In the Investment Analysis dialog box, select **Investment** → **New** → **Generic Cashflow** from the menu bar to open the **Generic Cashflow** dialog box. Enter RETAIL for the **Name** as in Figure 53.17.

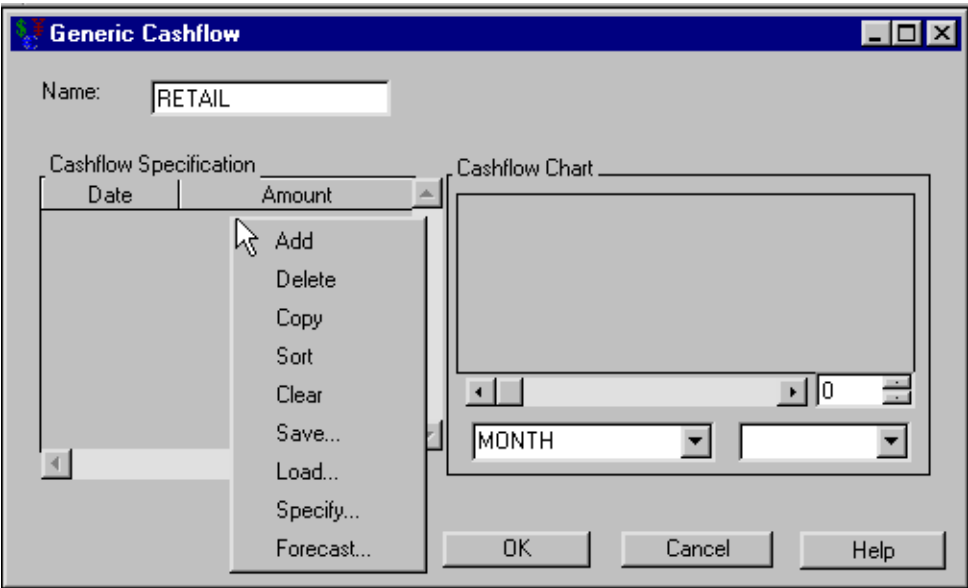
Figure 53.17 Introducing the Generic Cashflow



Right-Clicking within the Cashflow Specification Area

Right-clicking within Generic Cashflow’s **Cashflow Specification** area reveals the pop-up menu displayed in Figure 53.18. The menu provides many useful tools to assist you in creating these date-amount pairs.

Figure 53.18 Right-Clicking within the Cashflow Specification Area



The following sections describe how to use most of these right-click options. The **Specify** and **Forecast** menu items are described in the sections “[Including a Generated Cashflow](#)” on page 3167 and “[Including a Forecasted Cashflow](#)” on page 3169.

Adding a New Date-Amount Pair

To add a new date-amount pair manually, follow these steps:

1. Right-click in the **Cashflow Specification** area as shown in [Figure 53.18](#), and release on **Add**.
2. Enter 01JAN01 for the date.
3. Enter 100 for the amount.

Copying a Date-Amount Pair

To copy a selected date-amount pair, follow these steps:

1. Select the pair you just created.
2. Right-click in the **Cashflow Specification** area as shown in [Figure 53.18](#), but this time release on **Copy**.

Sorting All of the Date-Amount Pairs

Change the second date to 01JAN00. Now the dates are unsorted. Right-click in the **Cashflow Specification** area as shown in [Figure 53.18](#), and release on **Sort**.

Deleting a Date-Amount Pair

To delete a selected date-amount pair, follow these steps:

1. Select a date-amount pair.
2. Right-click in the **Cashflow Specification** area as shown in [Figure 53.18](#), and release on **Delete**.

Clearing All of the Date-Amount Pairs

To clear all date-amount pairs, right-click in the **Cashflow Specification** area as shown in [Figure 53.18](#), and release on **Clear**.

Loading Date-Amount Pairs from a Data Set

To load date-amount pairs from a SAS data set into the **Cashflow Specification** area, follow these steps:

1. Right-click in the **Cashflow Specification** area, and release on **Load**. This opens the Load Dataset dialog box.
2. Enter SASHELP.RETAIL for **Dataset Name**.
3. Click **OK** to return to the Generic Cashflow dialog box.

If there is a **Date** variable in the SAS data set, Investment Analysis loads it into the list. If there is no date-time-formatted variable, it loads the first available date or date-time-formatted variable. Investment Analysis then searches the SAS data set for an **Amount** variable to use. If none exists, it takes the first numeric variable that is not used by the **Date** variable.

Saving Date-Amount Pairs to a Data Set

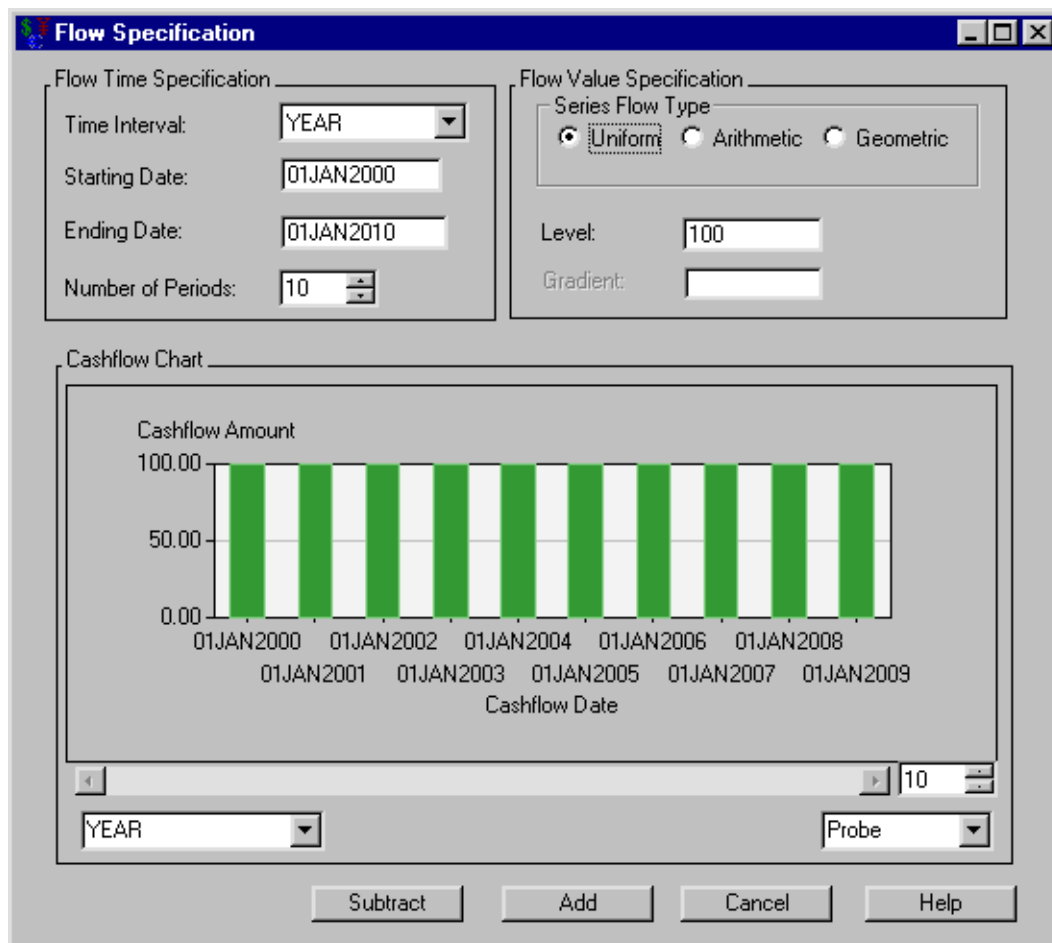
To save date-amount pairs from the **Cashflow Specification** area to a SAS data set, follow these steps:

1. Right-click in the **Cashflow Specification** area and release on **Save**. This opens the Save Dataset dialog box.
2. Enter the name of the SAS data set for **Dataset Name**.
3. Click **OK** to return to the Generic Cashflow dialog box.

Including a Generated Cashflow

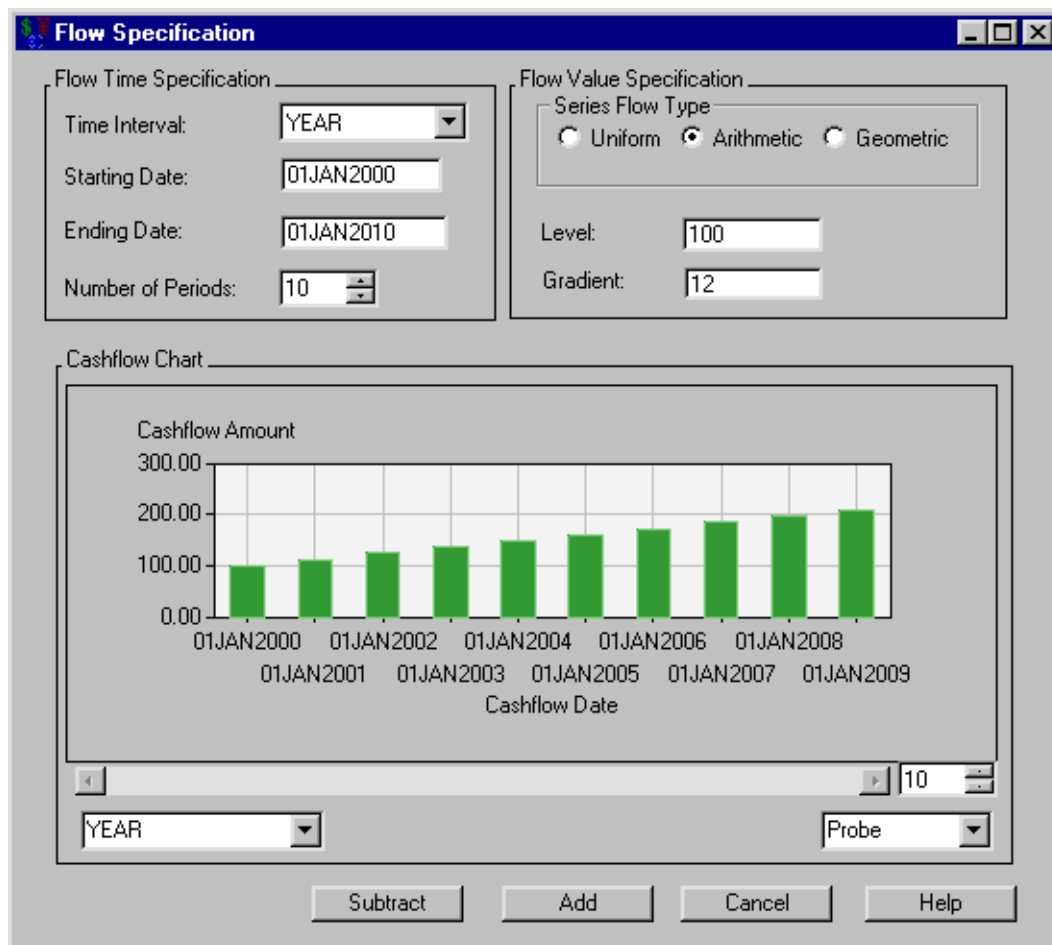
To generate date-amount pairs for the **Cashflow Specification** area, follow these steps:

1. Right-click in the **Cashflow Specification** area and release on **Specify**. This opens the Flow Specification dialog box.
2. Select YEAR for the **Time Interval**.
3. Enter today's date for the **Starting Date**.
4. Enter 10 for the **Number of Periods**. The **Ending Date** updates.
5. Enter 100 for the level. You can visualize the specification in the Cashflow Chart area (see [Figure 53.19](#)).
6. Click **Add** to add the specified cashflow to the list in the Generic Cashflow dialog box. Clicking **Add** also returns you to the Generic Cashflow dialog box.

Figure 53.19 Uniform Cashflow Specification

Clicking **Subtract** subtracts the current cashflow from the Generic Cashflow dialog box, and it returns you to the Generic Cashflow dialog box.

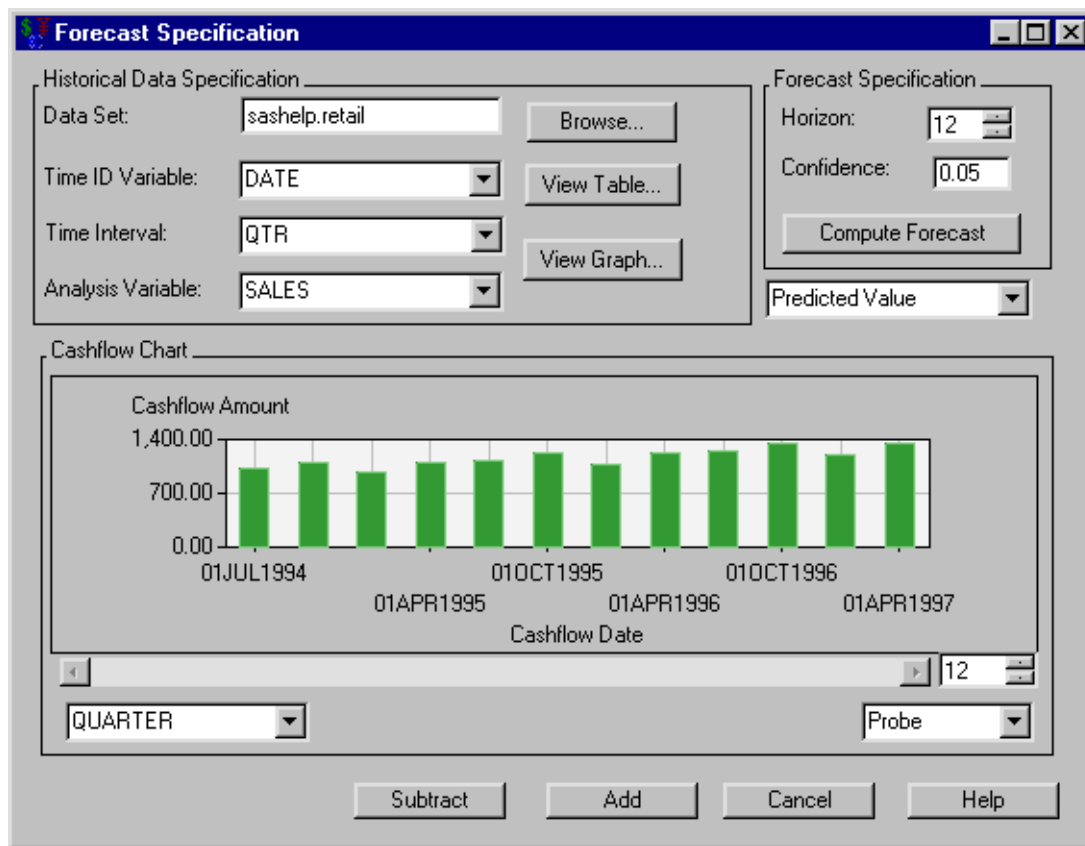
You can generate arithmetic and geometric specifications by clicking them within the **Series Flow Type** area. However, you must enter a value for the **Gradient**. In both cases the **Level** value is the value of the list at the **Starting Date**. With an arithmetic flow type, entries increment by the value **Gradient** for each **Time Interval**. With a geometric flow type, entries increase by the factor **Gradient** for each **Time Interval**. [Figure 53.20](#) displays an arithmetic cashflow with a **Level** of 100 and a **Gradient** of 12.

Figure 53.20 Arithmetic Cashflow Specification

Including a Forecasted Cashflow

To generate date-amount pairs for the **Cashflow Specification** area, follow these steps:

1. Right-click in the **Cashflow Specification** area and release on **Forecast** to open the **Forecast Specification** dialog box.
2. Enter sashelp.retail as the **Data Set**.
3. Select SALES for the **Analysis Variable**.
4. Click **Compute Forecast** to generate the forecast. You can visualize the forecast in the Cashflow Chart area (see [Figure 53.21](#)).
5. Click **Add** to add the forecast to the list in the Generic Cashflow dialog box. Clicking **Add** also returns you to the Generic Cashflow dialog box.

Figure 53.21 Cashflow Forecast

Clicking **Subtract** subtracts the current forecast from the Generic Cashflow dialog box, and it returns you to the Generic Cashflow dialog box.

To review the values from the SAS data set you forecast, click **View Table** or **View Graph**.

You can adjust the following values for the SAS data set you forecast: **Time ID Variable**, **Time Interval**, and **Analysis Variable**.

You can adjust the following values for the forecast: the **Horizon**, the **Confidence**, and choice of predicted value, lower confidence limit, and upper confidence limit.

Using the Cashflow Chart

Three dialog boxes contain the Cashflow Chart to aide in your visualization of cashflows: Generic Cashflow, Flow Specification, and Forecast Specification. Within this chart, you possess the following tools:

You can click on a bar in the plot and view its **Cashflow Date** and **Cashflow Amount**.

You can change the aggregation period of the view with the box in the lower-left corner of the Cashflow Chart. You can take the quarterly sales figures from the previous example, select **YEAR** as the value for this box, and view the annual sales figures. You can change the number in the box to the right of the horizontal scroll bar to alter the number of entries you want to view. The number in that box must be no

greater than the number of entries in the cashflow list. Lessening this number has the effect of zooming in upon a portion of the cashflow. When the number is less than the number of entries in the cashflow list, you can use the scroll bar at the bottom of the chart to scroll through the chart.

Dialog Box Guide

Loan

Selecting **Investment** → **New** → **Loan** from the Investment Analysis dialog box's menu bar opens the Loan dialog box displayed in Figure 53.22.

Figure 53.22 Loan Dialog Box

The following items are displayed:

Name holds the name you assign to the loan. You can set the name here or within the **Portfolio** area of the **Investment Analysis** dialog box. This must be a valid SAS name.

The **Loan Specification** area gives access to the values that define the loan.

Loan Amount holds the borrowed amount.

Periodic Payment holds the value of the periodic payments.

Number of Payments holds the number of payments in loan terms.

Payment Interval holds the frequency of the Periodic Payment.

Compounding Interval holds the compounding frequency.

Initial Rate holds the interest rate (a nominal percentage between 0 and 120) you pay on the loan.

Start Date holds the SAS date when the loan is initialized. The first payment is due one Payment Interval after this time.

Initialization opens the [Loan Initialization Options](#) dialog box where you can define initialization costs and down-payments relevant to the loan.

Prepayments opens the [Loan Prepayments](#) dialog box where you can specify the SAS dates and amounts of any prepayments.

Balloon Payments opens the [Balloon Payments](#) dialog box where you can specify the SAS dates and amounts of any balloon payments.

Rate Adjustments opens the [Rate Adjustment Terms](#) dialog box where you can specify terms for a variable-rate loan.

Rounding Off opens the [Rounding Off](#) dialog box where you can select the number of decimal places for calculations.

Create Amortization Schedule becomes available when you adequately define the loan within the **Loan Specification** area. Clicking it generates the amortization schedule.

Amortization Schedule fills when you click **Create Amortization Schedule**. The schedule contains a row for the loan's start-date and each payment-date with information about the following:

Date is a SAS date, either the loan's start-date or a payment-date.

Beginning Principal Amount is the balance at that date.

Periodic Payment Amount is the expected payment at that date.

Interest Payment is zero for the loan's start-date; otherwise it holds the interest since the previous date.

Principal Repayment is the amount of the payment that went toward the principal.

Ending Principal is the balance at the end of the payment interval.

Print becomes available when you generate the amortization schedule. Clicking it sends the contents of the amortization schedule to the SAS session print device.

Save Data As becomes available when you generate the amortization schedule. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the amortization table (or portions thereof) as a SAS Dataset.

OK returns you to the [Investment Analysis](#) dialog box. If this is a new loan specification, clicking **OK** appends the current loan specification to the portfolio. If this is an existing loan specification, clicking **OK** returns the altered loan specification to the portfolio.

Cancel returns you to the [Investment Analysis](#) dialog box. If this is a new loan specification, clicking **Cancel** discards the current loan specification. If this is an existing loan specification, clicking **Cancel** discards the current changes.

Loan Initialization Options

Clicking **Initialization** in the Loan dialog box opens the Loan Initialization Options dialog box displayed in Figure 53.23.

Figure 53.23 Loan Initialization Options Dialog Box

The dialog box is titled "Loan Initialization Options". It is divided into two main sections. The first section, "Price, Loan Amount and Downpayment", contains three input fields: "Purchase Price:", "Loan Amount:", and "Downpayment:". To the right of each input field is a "% of Price" spinner. The "Purchase Price" spinner is set to 100.0, the "Loan Amount" spinner is set to 100.0, and the "Downpayment" spinner is set to 0.00. The second section, "Initialization Costs and Discount Points", contains three input fields: "Loan Amount:", "Initialization Costs:", and "Discount Points:". To the right of each input field is a "% of Amount" spinner. The "Loan Amount" spinner is set to 0.00, the "Initialization Costs" spinner is set to 0.00, and the "Discount Points" spinner is set to 0.00. At the bottom of the dialog are three buttons: "OK", "Cancel", and "Help".

The following items are displayed:

The **Price, Loan Amount and Downpayment** area contains the following information:

Purchase Price holds the actual price of the asset. This value equals the loan amount plus the downpayment.

Loan Amount holds the loan amount.

% of Price (to the right of **Loan Amount**) updates when you enter the **Purchase Price** and either the **Loan Amount** or **Downpayment**. This holds the percentage of the **Purchase Price** that comprises the **Loan Amount**. Setting the percentage manually causes the **Loan Amount** and **Downpayment** to update.

Downpayment holds any downpayment paid for the asset.

% of Price (to the right of **Downpayment**) updates when you enter the **Purchase Price** and either the **Loan Amount** or **Downpayment**. This holds the percentage of the **Purchase Price** that comprises the **Downpayment**. Setting the percentage manually causes the **Loan Amount** and **Downpayment** to update.

Initialization Costs and Discount Points area

Loan Amount holds a copy of the **Loan Amount** above.

Initialization Costs holds the value of any initialization costs.

% of Amount (to the right of **Initialization Costs**) updates when you enter the **Purchase Price** and either the **Initialization Costs** or **Discount Points**. This holds the percentage of the **Loan Amount** that comprises the **Initialization Costs**. Setting the percentage manually causes the **Initialization Costs** to update.

Discount Points holds the value of any discount points.

% of Amount (to the right of **Discount Points**) updates when you enter the **Purchase Price** and either the **Initialization Costs** or **Discount Points**. This holds the percentage of the **Loan Amount** that comprises the **Discount Points**. Setting the percentage manually causes the **Discount Points** to update.

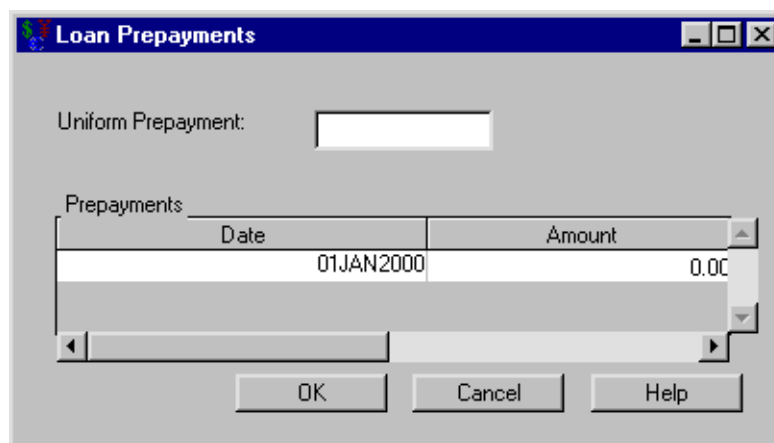
OK returns you to the **Loan** dialog box, saving the information that is entered.

Cancel returns you to the **Loan** dialog box, discarding any changes made since you opened the dialog box.

Loan Prepayments

Clicking **Prepayments** in the **Loan** dialog box opens the **Loan Prepayments** dialog box displayed in [Figure 53.24](#).

Figure 53.24 Loan Prepayments Dialog Box



The following items are displayed:

Uniform Prepayment holds the value of a regular prepayment concurrent to the usual periodic payment.

Prepayments holds a list of date-amount pairs to accommodate any prepayments. **Right-clicking** within the **Prepayments** area reveals many helpful tools for managing date-amount pairs.

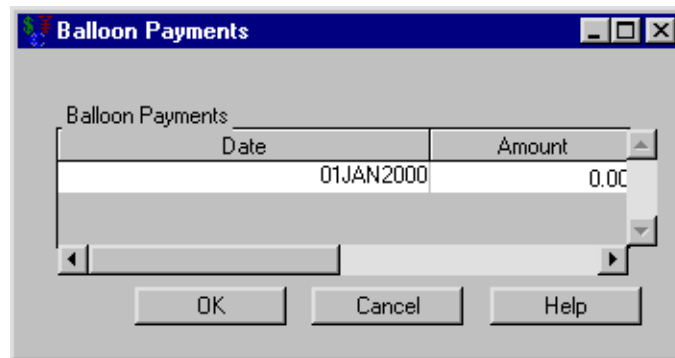
OK returns you to the **Loan** dialog box, storing the information entered on the prepayments.

Cancel returns you to the [Loan](#) dialog box, discarding any prepayments entered since you opened the dialog box.

Balloon Payments

Clicking **Balloon Payments** in the Loan dialog box opens the Balloon Payments dialog box displayed in Figure 53.25.

Figure 53.25 Balloon Payments Dialog Box



The following items are displayed:

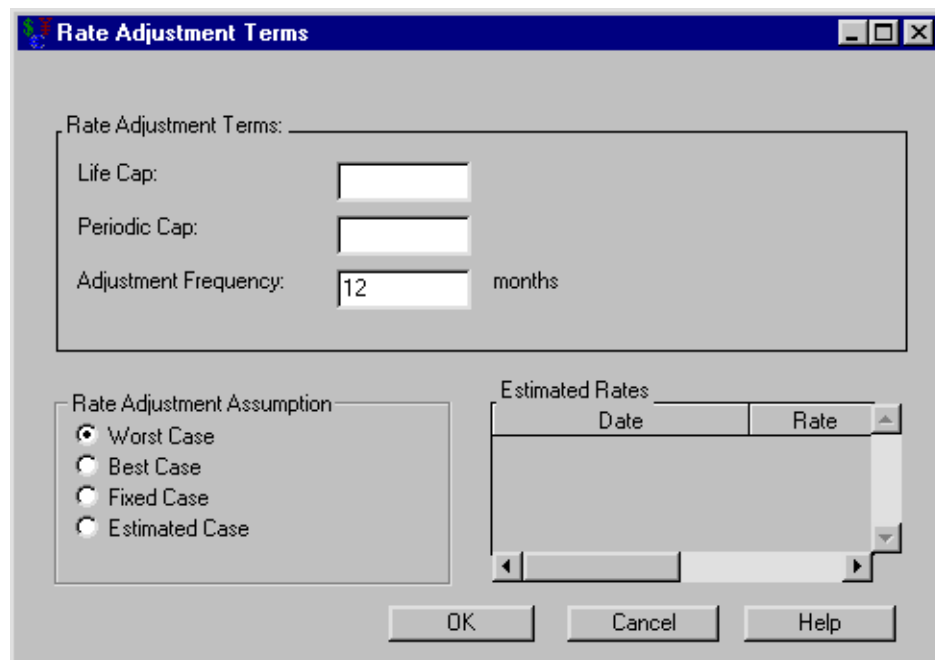
Balloon Payments holds a list of date-amount pairs to accommodate any balloon payments. **Right-clicking** within the **Balloon Payments** area reveals many helpful tools for managing date-amount pairs.

OK returns you to the [Loan](#) dialog box, storing the information entered on the balloon payments.

Cancel returns you to the [Loan](#) dialog box, discarding any balloon payments entered since you opened the dialog box.

Rate Adjustment Terms

Clicking **Rate Adjustments** in the Loan dialog box opens the Rate Adjustment Terms dialog box displayed in Figure 53.26.

Figure 53.26 Rate Adjustment Terms Dialog Box


The dialog box is titled "Rate Adjustment Terms". It contains two main sections. The first section, "Rate Adjustment Terms:", has three input fields: "Life Cap:" (empty), "Periodic Cap:" (empty), and "Adjustment Frequency:" (12) followed by the text "months". The second section, "Rate Adjustment Assumption", has four radio buttons: "Worst Case" (selected), "Best Case", "Fixed Case", and "Estimated Case". To the right of this section is a table titled "Estimated Rates" with two columns: "Date" and "Rate". The table is currently empty. At the bottom of the dialog are three buttons: "OK", "Cancel", and "Help".

The following items are displayed:

The **Rate Adjustment Terms** area

Life Cap holds the maximum deviation from the **Initial Rate** allowed over the life of the loan.

Periodic Cap holds the maximum adjustment allowed per adjustment.

Adjustment Frequency holds how often (in months) the lender can adjust the interest rate.

The **Rate Adjustment Assumption** determines the scenario the adjustments will take.

Worst Case uses information from the **Rate Adjustment Terms** area to forecast a worst-case scenario.

Best Case uses information from the **Rate Adjustment Terms** area to forecast a best-case scenario.

Fixed Case specifies a fixed-rate loan.

Estimated Case uses information from the **Rate Adjustment Terms** and **Estimated Rate** area to forecast a best-case scenario.

Estimated Rates holds a list of date-rate pairs, where each date is a SAS date and the rate is a nominal percentage between 0 and 120. The **Estimated Case** assumption uses these rates for its calculations. [Right-clicking](#) within the **Estimated Rates** area reveals many helpful tools for managing date-rate pairs.

OK returns you to the [Loan](#) dialog box, taking rate adjustment information into account.

Cancel returns you to the [Loan](#) dialog box, discarding any rate adjustment information provided since opening the dialog box.

Rounding Off

Clicking **Rounding Off** in the Loan dialog box opens the Rounding Off dialog box displayed in Figure 53.27.

Figure 53.27 Rounding Off Dialog Box



The following items are displayed:

Decimal Places fixes the number of decimal places your results will display.

OK returns you to the [Loan](#) dialog box. Numeric values will then be represented with the number of decimals specified in **Decimal Places**.

Cancel returns you to the [Loan](#) dialog box. Numeric values will be represented with the number of decimals specified prior to opening this dialog box.

Savings

Selecting **Investment** → **New** → **Savings** from the Investment Analysis dialog box's menu bar opens the Savings dialog box displayed in Figure 53.28.

Figure 53.28 Savings Dialog Box

The Savings Dialog Box is shown with the following fields and controls:

- Name:** untitled_saving
- Savings Specification:**
 - Periodic Deposit: []
 - Start Date: 01JAN2000
 - Number of Deposits: []
 - Deposit Interval: MONTH (dropdown)
 - Initial Rate: []
 - Compounding Interval: MONTH (dropdown)
- Ending Date:** [] **Balance:** [] **Create Account Summary** (button)
- Account Summary** (list box)
- Buttons:** Save Data As..., OK, Cancel, Help

The following items are displayed:

Name holds the name you assign to the savings. You can set the name here or within the **Portfolio** area of the **Investment Analysis** dialog box. This must be a valid SAS name.

The **Savings Specification** area

Periodic Deposit holds the value of your regular deposits.

Number of Deposits holds the number of deposits into the account.

Initial Rate holds the interest rate (a nominal percentage between 0 and 120) the savings account earns.

Start Date holds the SAS date when deposits begin.

Deposit Interval holds the frequency of your **Periodic Deposit**.

Compounding Interval holds how often the interest compounds.

Create Account Summary becomes available when you adequately define the savings within the **Savings Specification** area. Clicking it generates the account summary.

Account Summary fills when you click **Create Account Summary**. The schedule contains a row for each deposit-date with information about the following:

Date is the SAS date of a deposit.

Starting Balance is the balance at that date.

Deposits is the deposit at that date.

Interest Earned is the interest earned since the previous date.

Ending Balance is the balance after the payment.

Print becomes available when you generate an account summary. Clicking it sends the contents of the account summary to the SAS session print device.

Save Data As becomes available when you generate an account summary. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the account summary (or portions thereof) as a SAS Dataset.

OK returns you to the [Investment Analysis](#) dialog box. If this is a new savings, clicking **OK** appends the current savings specification to the portfolio. If this is an existing savings specification, clicking **OK** returns the altered savings to the portfolio.

Cancel returns you to the [Investment Analysis](#) dialog box. If this is a new savings, clicking **Cancel** discards the current savings specification. If this is an existing savings, clicking **Cancel** discards the current changes.

Depreciation

Selecting **Investment** → **New** → **Depreciation** from the Investment Analysis dialog box's menu bar opens the Depreciation dialog box displayed in [Figure 53.29](#).

Figure 53.29 Depreciation Dialog Box

The following items are displayed:

Name holds the name you assign to the depreciation. You can set the name here or within the **Portfolio** area of the [Investment Analysis](#) dialog box. This must be a valid SAS name.

Depreciable Asset Specification

Cost holds the asset's original cost.

Year of Purchase holds the asset's year of purchase.

Useful Life holds the asset's useful life (in years).

Salvage Value holds the asset's value at the end of its **Useful Life**.

The **Depreciation Method** area holds the depreciation methods available:

- Straight Line
- Sum-of-years Digits
- [Depreciation Table](#)
- Declining Balance
 - DB Factor: choice of 2, 1.5, or 1
 - Conversion to SL: choice of Yes or No

Create Depreciation Schedule becomes available when you adequately define the depreciation within the **Depreciation Asset Specification** area. Clicking the **Create Depreciation Schedule** button then fills the **Depreciation Schedule** area.

Depreciation Schedule fills when you click **Create Depreciation Schedule**. The schedule contains a row for each year. Each row holds:

Year is a year.

Start Book Value is the starting book value for that year.

Depreciation is the depreciation value for that year.

End Book Value is the ending book value for that year.

Print becomes available when you generate the depreciation schedule. Clicking it sends the contents of the depreciation schedule to the SAS session print device.

Save Data As becomes available when you generate the depreciation schedule. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the depreciation table (or portions thereof) as a SAS Dataset.

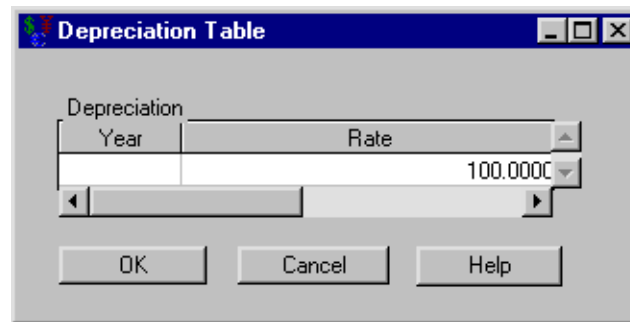
OK returns you to the [Investment Analysis](#) dialog box. If this is a new depreciation specification, clicking **OK** appends the current depreciation specification to the portfolio. If this is an existing depreciation specification, clicking **OK** returns the altered depreciation specification to the portfolio.

Cancel returns you to the [Investment Analysis](#) dialog box. If this is a new depreciation specification, clicking **Cancel** discards the current depreciation specification. If this is an existing depreciation specification, clicking **Cancel** discards the current changes.

Depreciation Table

Clicking **Depreciation Table** from **Depreciation Method** area of the Depreciation dialog box opens the Depreciation Table dialog box displayed in [Figure 53.30](#).

Figure 53.30 Depreciation Table Dialog Box



The following items are displayed:

The **Depreciation** area holds a list of year-rate pairs where the rate is an annual depreciation rate (a percentage between 0% and 100%). [Right-clicking](#) within the **Depreciation** area reveals many helpful tools for managing year-rate pairs.

OK returns you to the [Depreciation](#) dialog box with the current list of depreciation rates from the **Depreciation** area.

Cancel returns you to the [Depreciation](#) dialog box, discarding any editions to the **Depreciation** area since you opened the dialog box.

Bond

Selecting **Investment** → **New** → **Bond** from the Investment Analysis dialog box's menu bar opens the Bond dialog box displayed in [Figure 53.31](#).

Figure 53.31 Bond

The following items are displayed:

Name holds the name you assign to the bond. You can set the name here or within the **Portfolio** area of the [Investment Analysis](#) dialog box. This must be a valid SAS name.

Bond Specification

Face Value holds the bond's value at maturity.

Coupon Payment holds the amount of money you receive periodically as the bond matures.

Coupon Rate holds the rate (a nominal percentage between 0% and 120%) of the **Face Value** that defines the **Coupon Payment**.

Coupon Interval holds how often the bond pays its coupons.

Number of Coupons holds the number of coupons before maturity.

Maturity Date holds the SAS date when you can redeem the bond for its **Face Value**.

The **Valuation** area becomes available when you adequately define the bond within the **Bond Specification** area. Entering either the **Value** or the **Yield** causes the calculation of the other. If you respecify the bond after performing a calculation here, you must reenter the **Value** or **Yield** value to update the calculation.

Value holds the bond's value if expecting the specified **Yield**.

Yield holds the bond's yield if the bond is valued at the amount of **Value**.

You must specify the bond before analyzing it. After you have specified the bond, clicking **Analyze** opens the [Bond Analysis](#) dialog box where you can compare various values and yields.

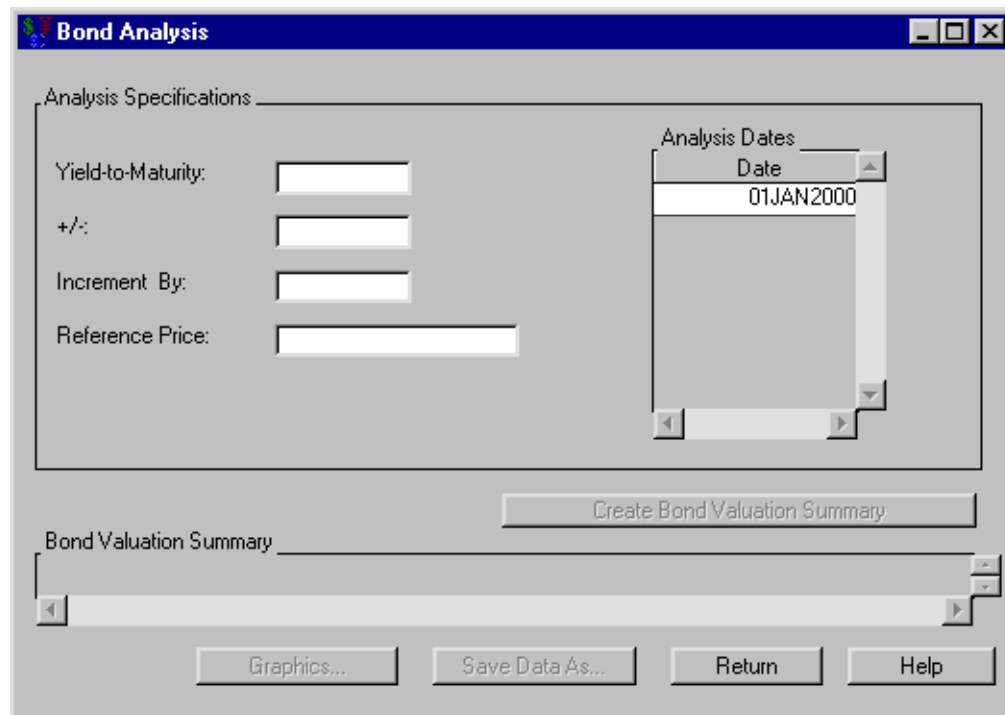
OK returns you to the **Investment Analysis** dialog box. If this is a new bond specification, clicking **OK** appends the current bond specification to the portfolio. If this is an existing bond specification, clicking **OK** returns the altered bond specification to the portfolio.

Cancel returns you to the **Investment Analysis** dialog box. If this is a new bond specification, clicking **Cancel** discards the current bond specification. If this is an existing bond specification, clicking **Cancel** discards the current changes.

Bond Analysis

Clicking **Analyze** from the Bond dialog box opens the Bond Analysis dialog box displayed in [Figure 53.32](#).

Figure 53.32 Bond Analysis



The following items are displayed:

Analysis Specifications

Yield-to-maturity holds the percentage yield upon which to center the analysis.

+/- holds the maximum deviation percentage to consider from the **Yield-to-maturity**.

Increment by holds the percentage increment by which the analysis is calculated.

Reference Price holds the reference price.

Analysis Dates holds a list of SAS dates for which you perform the bond analysis.

You must specify the analysis before valuing the bond for the various yields. After you adequately specify the analysis, click **Create Bond Valuation Summary** to generate the bond valuation summary.

Bond Valuation Summary fills when you click **Create Bond Valuation Summary**. The schedule contains a row for each rate with information concerning the following:

Date is the SAS date when the **Value** gives the particular **Yield**.

Yield is the percent yield that corresponds to the **Value** at the given **Date**.

Value is the value of the bond at **Date** for the given **Yield**.

Percent Change is the percent change if the **Reference Price** is specified.

Duration is the duration.

Convexity is the convexity.

Graphics opens the [Bond Price](#) graph that represents the price versus yield-to-maturity.

Print becomes available when you generate the **Bond Valuation Summary**. Clicking it sends the contents of the summary to the SAS session print device.

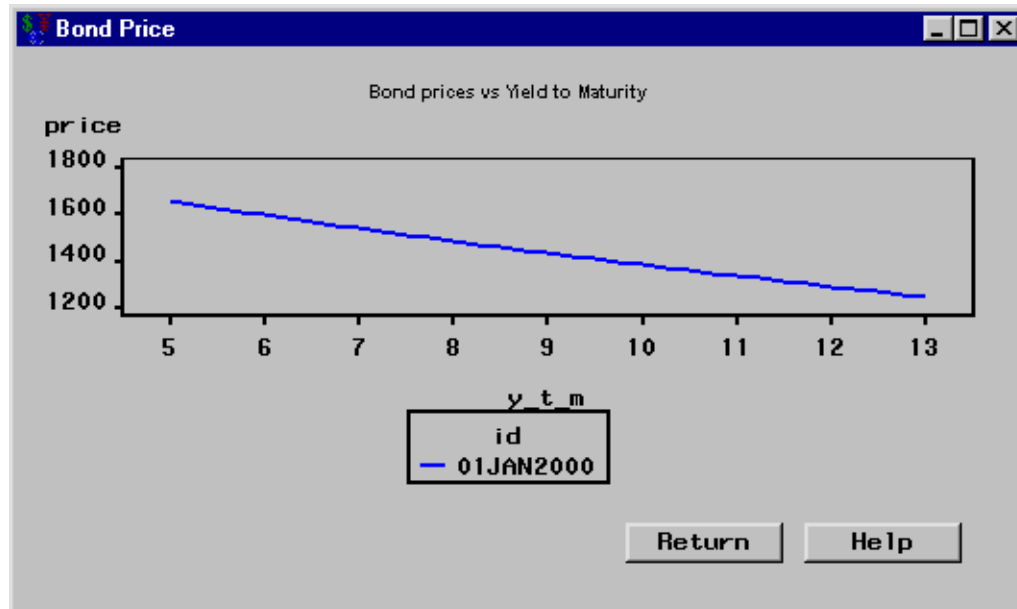
Save Data As becomes available when you fill the **Bond Valuation Summary** area. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the valuation summary (or portions thereof) as a SAS Dataset.

Return takes you back to the [Bond](#) dialog box.

Bond Price

Clicking **Graphics** from the Bond dialog box opens the Bond Price dialog box displayed in Figure 53.33.

Figure 53.33 Bond Price Graph

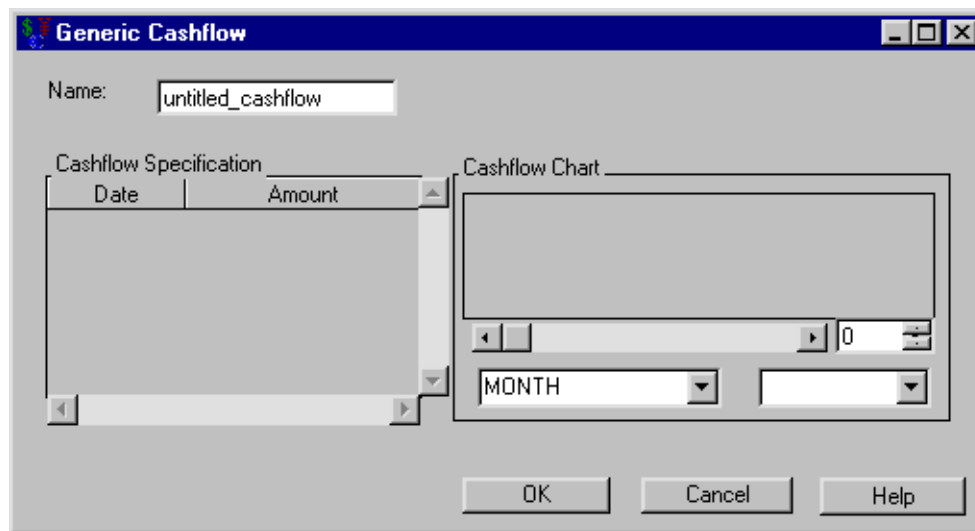


It possesses the following item:

Return takes you back to the [Bond Analysis](#) dialog box.

Generic Cashflow

Selecting **Investment** → **New** → **Generic Cashflow** from the Investment Analysis dialog box's menu bar opens the Generic Cashflow dialog box displayed in Figure 53.34.

Figure 53.34 Generic Cashflow

The following items are displayed:

Name holds the name you assign to the generic cashflow. You can set the name here or within the **Portfolio** area of the [Investment Analysis](#) dialog box. This must be a valid SAS name.

Cashflow Specification holds date-amount pairs that correspond to deposits and withdrawals (or benefits and costs) for the cashflow. Each date is a SAS date. [Right-clicking](#) within the **Cashflow Specification** area reveals many helpful tools for managing date-amount pairs.

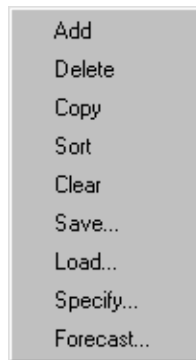
The **Cashflow Chart** fills with a graph representing the cashflow when the **Cashflow Specification** area is nonempty. The box to the right of the scroll bar controls the number of entries with which to fill the graph. If the number in this box is less than the total number of entries, you can use the scroll bar to view different segments of the cashflow. The left box below the scroll bar holds the frequency for drilling purposes.

OK returns you to the [Investment Analysis](#) dialog box. If this is a new generic cashflow specification, clicking **OK** appends the current cashflow specification to the portfolio. If this is an existing cashflow specification, clicking **OK** returns the altered cashflow specification to the portfolio.

Cancel returns you to the [Investment Analysis](#) dialog box. If this is a new cashflow specification, clicking **Cancel** discards the current cashflow specification. If this is an existing cashflow specification, clicking **Cancel** discards the current changes.

Right-Clicking within Generic Cashflow's Cashflow Specification Area

Right-click within the **Cashflow Specification** area of the Generic Cashflow dialog box pops up the menu displayed in [Figure 53.35](#).

Figure 53.35 Right-Clicking

Add creates a blank pair.

Delete removes the currently highlighted pair.

Copy duplicates the currently selected pair.

Sort arranges the entered pairs in chronological order.

Clear empties the area of all pairs.

Save opens the [Save Dataset](#) dialog box where you can save the entered pairs as a SAS Dataset for later use.

Load opens the [Load Dataset](#) dialog box where you select a SAS Dataset to populate the area.

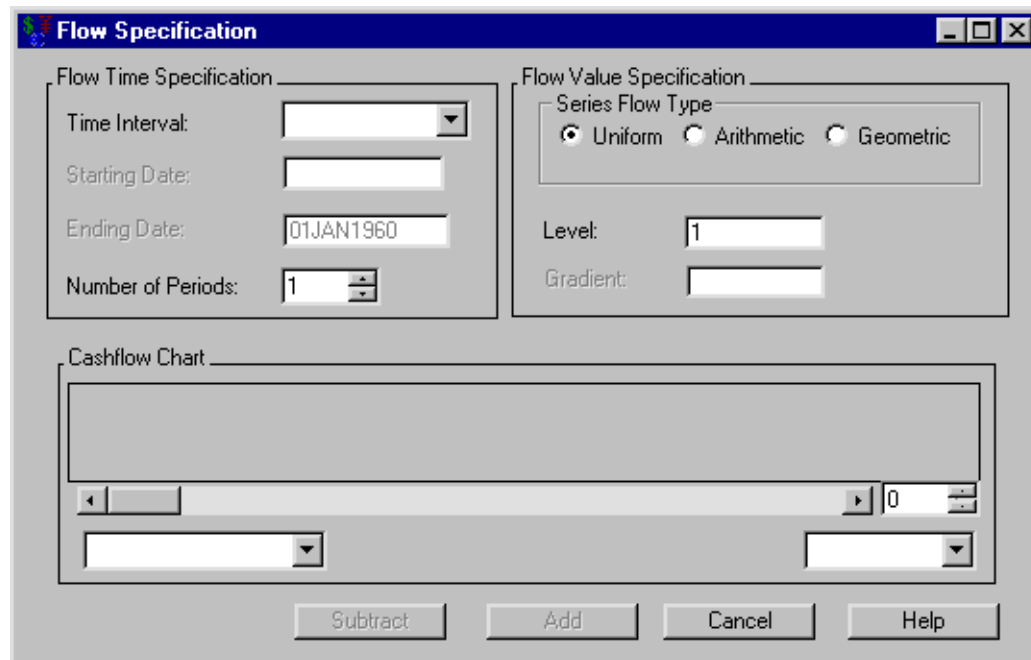
Specify opens the [Flow Specification](#) dialog box where you can generate date-rate pairs to include in your cashflow.

Forecast opens the [Forecast Specification](#) dialog box where you can generate the forecast of a SAS data set to include in your cashflow.

If you want to perform one of these actions on a collection of pairs, you must select a collection of pairs before right-clicking. To select an adjacent list of pairs, do the following: click the first pair, hold down the SHIFT key, and click the final pair. After the list of pairs is selected, you can release the SHIFT key.

Flow Specification

Figure 53.36 Flow Specification



The dialog box is titled "Flow Specification". It is divided into two main sections: "Flow Time Specification" and "Flow Value Specification".

Flow Time Specification:

- Time Interval:** A dropdown menu.
- Starting Date:** A text input field.
- Ending Date:** A text input field containing "01JAN1960".
- Number of Periods:** A spin box with the value "1".

Flow Value Specification:

- Series Flow Type:** A group box containing three radio buttons: "Uniform" (selected), "Arithmetic", and "Geometric".
- Level:** A text input field containing "1".
- Gradient:** A text input field.

Cashflow Chart:

A large empty rectangular area for a chart. Below it is a horizontal scrollbar with a value of "0". At the bottom of the chart area are two dropdown menus.

Buttons: "Subtract", "Add", "Cancel", and "Help" are located at the bottom of the dialog.

The following items are displayed:

Flow Time Specification

Time Interval holds the uniform frequency of the entries.

You can set the **Starting Date** when you set the **Time Interval**. It holds the SAS date the entries will start.

You can set the **Ending Date** when you set the **Time Interval**. It holds the SAS date the entries will end.

Number of Periods holds the number of entries.

Flow Value Specification

Series Flow Type describes the movement the entries can assume:

- **Uniform** assumes all entries are equal.
- **Arithmetic** assumes the entries begin at **Level** and increase by the value of **Gradient** per entry.
- **Geometric** assumes the entries begin at **Level** and increase by a factor of **Gradient** per entry.

Level holds the starting amount for all flow types.

You can set the **Gradient** when you select either **Arithmetic** or **Geometric** series flow type. It holds the arithmetic and geometric gradients, respectively, for the **Arithmetic** and **Geometric** flow types.

When the cashflow entries are adequately defined, the **Cashflow Chart** fills with a graph displaying the dates and values of the entries. The box to the right of the scroll bar controls the number of entries with which to fill the graph. If the number in this box is less than the total number of entries, you can use the scroll bar to view different segments of the cashflow. The left box below the scroll bar holds the frequency.

Subtract becomes available when the collection of entries is adequately specified. Clicking **Subtract** then returns you to the [Generic Cashflow](#) dialog box and subtracts the entries from the current cashflow.

Add becomes available when the collection of entries is adequately specified. Clicking **Add** then returns you to the [Generic Cashflow](#) dialog box and adds the entries to the current cashflow.

Cancel returns you to [Generic Cashflow](#) dialog box without changing the cashflow.

Forecast Specification

Figure 53.37 Forecast Specification

Forecast Specification

Historical Data Specification

Data Set:

Time ID Variable:

Time Interval:

Analysis Variable:

Forecast Specification

Horizon:

Confidence:

Predicted Value:

Cashflow Chart

The following items are displayed:

Historical Data Specification

Data Set holds the name of the SAS data set to forecast.

Browse opens the standard SAS **Open** dialog box to help select a SAS data set to forecast.

Time ID Variable holds the time ID variable to forecast over.

Time Interval fixes the time interval for the **Time ID Variable**.

Analysis Variable holds the data variable upon which to forecast.

View Table opens a table that displays the contents of the specified SAS data set.

View Graph opens the Time Series Viewer that graphically displays the contents of the specified SAS data set.

Forecast Specification

Horizon holds the number of periods into the future you want to forecast.

Confidence holds the confidence limit for applicable forecasts.

Compute Forecast fills the **Cashflow Chart** with the forecast.

The box below **Forecast Specification** holds the type of forecast you want to generate:

- Predicted Value
- Lower Confidence Limit
- Upper Confidence Limit

The **Cashflow Chart** fills when you click **Compute Forecast**. The box to the right of the scroll bar controls the number of entries with which to fill the graph. If the number in this box is less than the total number of entries, you can use the scroll bar to view different segments of the cashflow. The left box below the scroll bar holds the frequency.

Subtract becomes available when the collection of entries is adequately specified. Clicking **Subtract** then returns you to the [Generic Cashflow](#) dialog box subtracting the forecast from the current cashflow.

Add becomes available when the collection of entries is adequately specified. Clicking **Add** then returns you to the [Generic Cashflow](#) adding the forecast to the current cashflow.

Cancel returns to [Generic Cashflow](#) dialog box without changing the cashflow.

Chapter 54


Computations

Contents	
The Compute Menu	3191
Tasks	3192
Taxing a Cashflow	3192
Converting Currency	3194
Deflating Cashflows	3196
Dialog Box Guide	3198
After Tax Cashflow Calculation	3198
Currency Conversion	3199
Constant Dollar Calculation	3201

The Compute Menu

Figure 54.1 shows the **Compute** menu.

Figure 54.1 The Compute Menu



The **Compute** menu offers the following options that apply to generic cashflows.

After Tax Cashflow opens the **After Tax Cashflow Calculation** dialog box. Computing an after tax cashflow is useful when taxes affect investment alternatives differently. Comparing after tax cashflows provides a more accurate determination of the cashflows’ profitabilities. You can set default values for income tax rates by selecting **Tools** → **Define Rate** → **Income Tax Rate** from the Investment Analysis dialog box. This opens the **Income Tax Specification** dialog box where you can enter the tax rates.

Currency Conversion opens the **Currency Conversion** dialog box. Currency conversion is necessary when investments are in different currencies. For data concerning currency conversion rates, see <http://dsbb.imf.org/>, the International Monetary Fund’s Dissemination Standards Bulletin Board.

Constant Dollars opens the **Constant Dollar Calculation** dialog box. A constant dollar (inflation adjusted monetary value) calculation takes cashflow and inflation information and discounts the cashflow to a level where the buying power of the monetary unit is constant over time. Groups quantify inflation (in the form of price indices and inflation rates) for countries and industries by averaging the growth of prices for various products and sectors of the economy. For data concerning price indices, see the United States Department of Labor at <http://www.dol.gov/> and the International Monetary Fund's Dissemination Standards Bulletin Board at <http://dsbb.imf.org/>. You can set default values for inflation rates by clicking **Tools** → **Define Rate** → **Inflation** from the Investment Analysis dialog box. This opens the **Inflation Specification** dialog box where you can enter the inflation rates.

Tasks

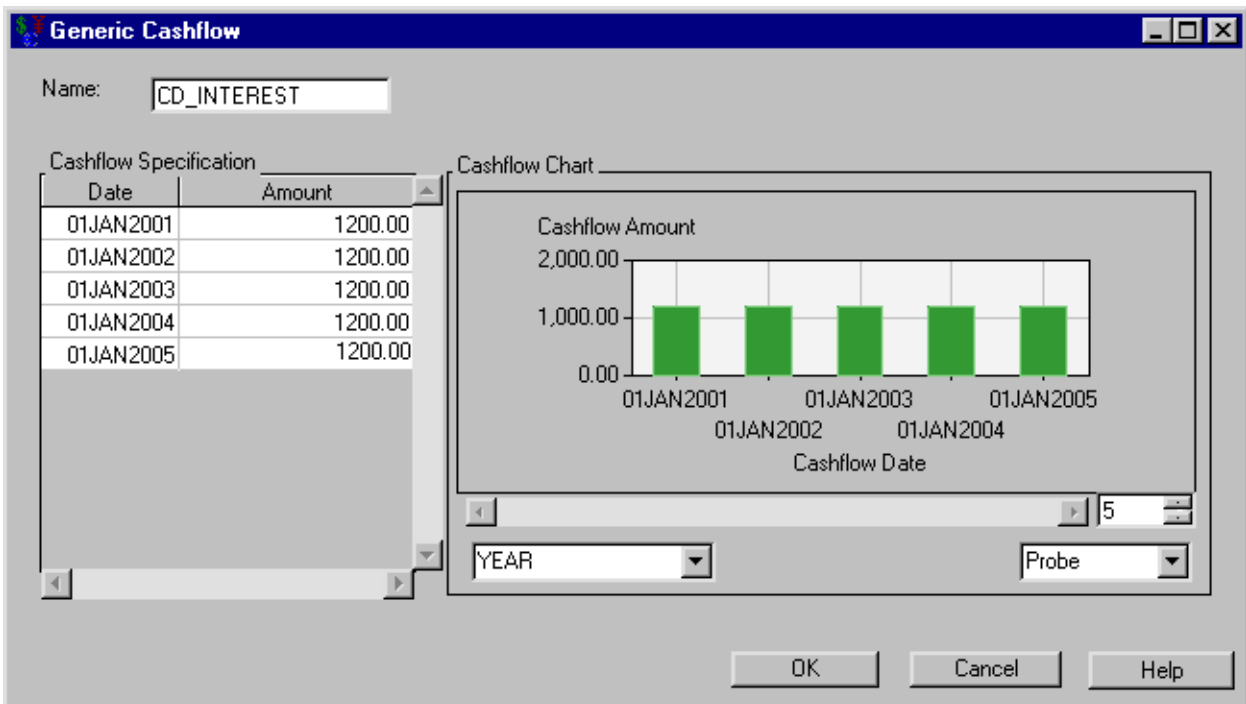
The next few sections show how to perform computations for the following situation. Suppose you buy a \$10,000 certificate of deposit that pays 12% interest a year for five years. Your earnings are taxed at a rate of 30% federally and 7% locally. Also, you want to transfer all the money to an account in England. British pounds convert to American dollars at an exchange rate of \$1.00 to £0.60. The inflation rate in England is 3%. The instructions in this example assume familiarity with the following:

- The right-clicking options of the **Cashflow Specification** area in the Generic Cashflow dialog box (described in the section “**Right-Clicking within Generic Cashflow’s Cashflow Specification Area**” on page 3186.)
- The **Save Data As** button located in many dialog boxes (described in the section “**Saving Output to SAS Data Sets**” on page 3219.)

Taxing a Cashflow

Consider the example described in the section “**The Compute Menu**” on page 3191. To create the earnings, follow these steps:

1. Select **Investment** → **New** → **Generic Cashflow** to create a generic cashflow.
2. Enter CD_INTEREST for the **Name**.
3. Enter 1200 for each of the five years starting one year from today as displayed in **Figure 54.2**.
4. Click **OK** to return to the Investment Analysis dialog box.

Figure 54.2 Computing the Interest on the CD

To compute the tax on the earnings, follow these steps:

1. Select CD_INTEREST from the **Portfolio** area.
2. Select **Compute** → **After Tax Cashflow** from the pull-down menu.
3. Enter 30 for **Federal Tax**.
4. Enter 7 for **Local Tax**. Note that **Combined Tax** updates.
5. Click **Create After Tax Cashflow**. The **After Tax Cashflow** area fills, as displayed in [Figure 54.3](#).

Figure 54.3 Computing the Interest After Taxes

After Tax Cashflow Calculation

Name:

Federal Tax:

Local Tax:

Combined Tax:

After Tax Cashflow

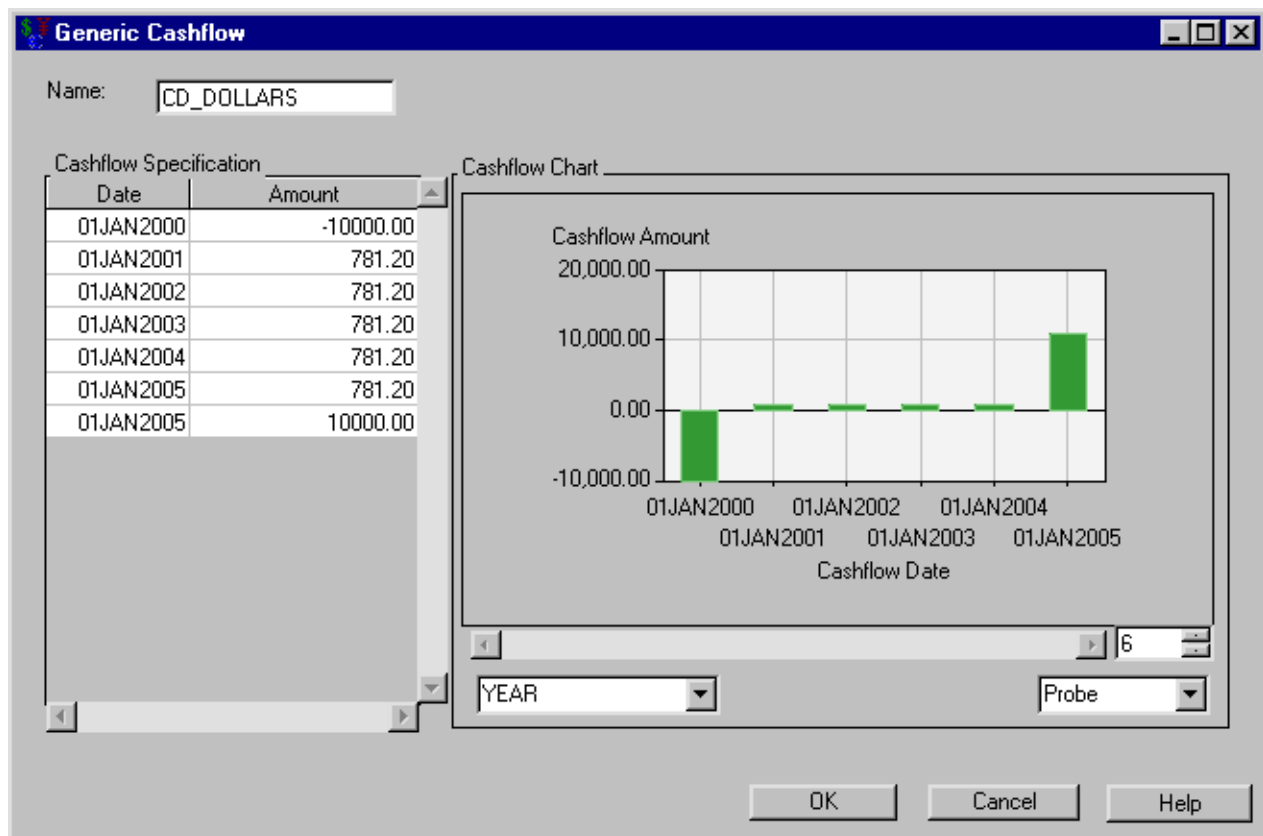
Date	Amount
01JAN2001	781.20
01JAN2002	781.20
01JAN2003	781.20
01JAN2004	781.20
01JAN2005	781.20

Save the taxed earnings to a SAS data set named `WORK.CD_AFTERTAX`. Click **Return** to return to the Investment Analysis dialog box.

Converting Currency

Consider the example described in the section “[The Compute Menu](#)” on page 3191. To create the cashflow to convert, follow these steps:

1. Select **Investment** → **New** → **Generic Cashflow** to open a new generic cashflow.
2. Enter `CD_DOLLARS` for the **Name**.
3. Load `WORK.CD_AFTERTAX` into its **Cashflow Specification**.
4. Add $-10,000$ for today and $+10,000$ for five years from today to the cashflow as displayed in [Figure 54.4](#).
5. Sort the transactions by date to aid your reading.
6. Click **OK** to return to the Investment Analysis dialog box.

Figure 54.4 The CD in Dollars

To convert from British pounds to American dollars, follow these steps:

1. Select CD_DOLLARS from the portfolio.
2. Select **Compute** → **Currency Conversion** from the pull-down menu. This opens the Currency Conversion dialog box.
3. Select USD for the **From Currency**.
4. Select GBP for the **To Currency**.
5. Enter 0.60 for the **Exchange Rate**.
6. Click **Apply Currency Conversion** to fill the **Currency Conversion** area as displayed in [Figure 54.5](#).

Figure 54.5 Converting the CD to Pounds

Name:

From Currency:

To Currency:

Exchange Rate:

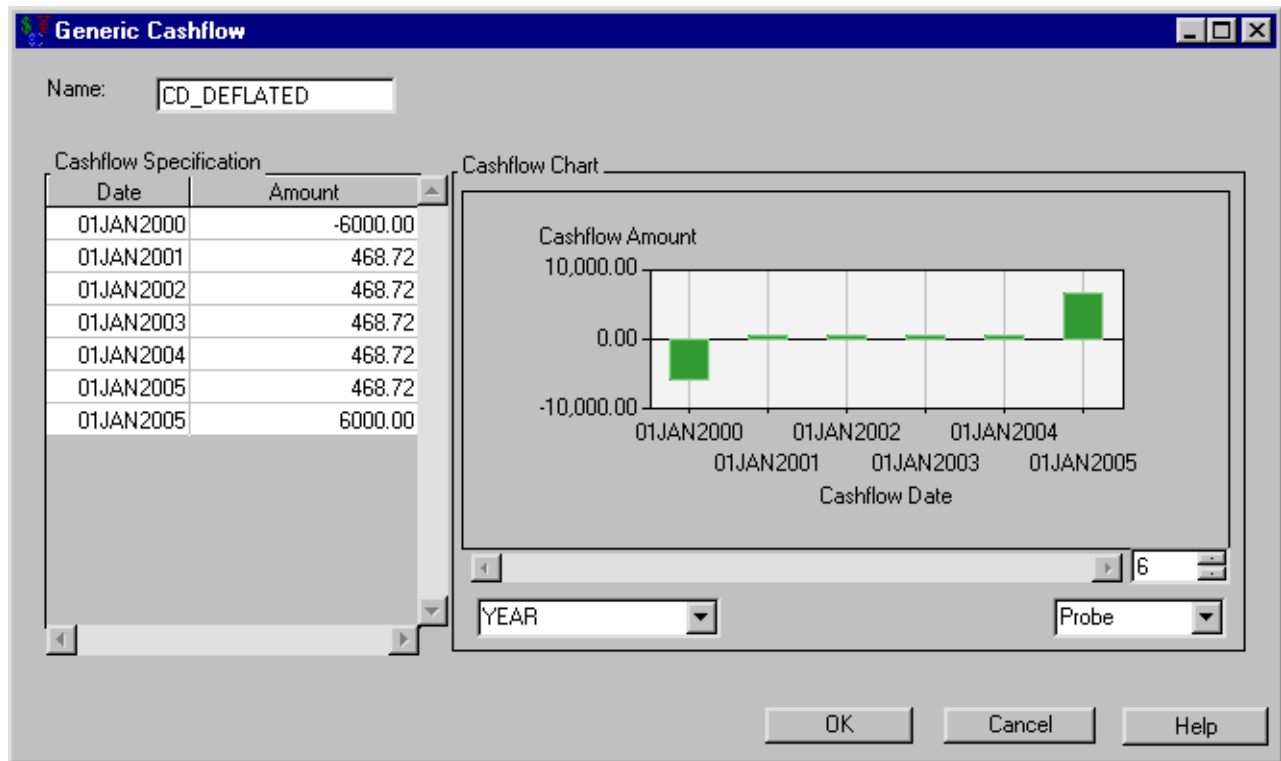
Date	CD_DOLLARS	GBP
01JAN2000	-10000.00	-6000.00
01JAN2001	781.20	468.72
01JAN2002	781.20	468.72
01JAN2003	781.20	468.72
01JAN2004	781.20	468.72
01JAN2005	781.20	468.72
01JAN2005	10000.00	6000.00

Save the converted values to a SAS data set named WORK.CD_POUNDS. Click **Return** to return to the Investment Analysis dialog box.

Deflating Cashflows

Consider the example described in the section “[The Compute Menu](#)” on page 3191. To create the cashflow to deflate, follow these steps:

1. Select **Investment** → **New** → **Generic Cashflow** to open a new generic cashflow.
2. Enter CD_DEFLATED for **Name**.
3. Load WORK.CD_POUNDS into its **Cashflow Specification** (see [Figure 54.6](#)).
4. Click **OK** to return to the Investment Analysis dialog box.

Figure 54.6 The CD before Deflation

To deflate the values, follow these steps:

1. Select CD_DEFLATED from the portfolio.
2. Select **Compute** → **Constant Dollars** from the menu. This opens the Constant Dollar Calculation dialog box.
3. Clear the **Variable Inflation List** area.
4. Enter 3 for the **Constant Inflation Rate**.
5. Click **Create Constant Dollar Equivalent** to generate a constant dollar equivalent summary (see [Figure 54.7](#)).

Figure 54.7 CD Values after Deflation

Constant Dollar Calculation

Name:

Constant Inflation Rate:

Variable Inflation List

Date	Rate

Dates

Date
01JAN2000

Constant Dollar Equivalent Summary

Date	JAN2000
01JAN2000	-6000.00
01JAN2001	455.07
01JAN2002	441.81
01JAN2003	428.95
01JAN2004	416.45
01JAN2005	404.32
01JAN2005	5175.65

You can save the deflated cashflow to a SAS data set for use in an internal rate of return analysis or breakeven analysis.

Click **Return** to return to the Investment Analysis dialog box.

Dialog Box Guide

After Tax Cashflow Calculation

Having selected a generic cashflow from the Investment Analysis dialog box, to perform an after tax calculation, select **Compute** → **After Tax** from the Investment Analysis dialog box's menu bar. This opens the After Tax Cashflow Calculation dialog box displayed in [Figure 54.8](#).

Figure 54.8 After Tax Cashflow Calculation Dialog Box

The following items are displayed:

Name holds the name of the investment for which you are computing the after-tax cashflow.

Federal Tax holds the federal tax rate (a percentage between 0% and 100%).

Local Tax holds the local tax rate (a percentage between 0% and 100%).

Combined Tax holds the effective tax rate from federal and local income taxes.

Create After Tax Cashflow becomes available when **Combined Tax** is not empty. Clicking **Create After Tax Cashflow** then fills the **After Tax Cashflow** area.

After Tax Cashflow fills when you click **Create After Tax Cashflow**. It holds a list of date-amount pairs where the amount is the amount retained after taxes for that date.

Print becomes available when you fill the after-tax cashflow. Clicking it sends the contents of the after tax cashflow to the SAS session print device.

Save Data As becomes available when you fill the after tax cashflow. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the resulting cashflow (or portions thereof) as a SAS Dataset.

Return returns you to the [Investment Analysis](#) dialog box.

Currency Conversion

Having selected a generic cashflow from the Investment Analysis dialog box, to perform a currency conversion, select **Compute** → **Currency Conversion** from the Investment Analysis dialog box's menu bar. This opens the Currency Conversion dialog box displayed in [Figure 54.9](#).

Figure 54.9 Currency Conversion Dialog Box

The screenshot shows a standard Windows-style dialog box titled "Currency Conversion". It features several input fields and buttons. The "Name" field contains the text "untitled_cashflo". The "From Currency" and "To Currency" fields are dropdown menus currently set to "USD" and "GBP" respectively. The "Exchange Rate" field is empty. To the right of these fields is a button labeled "Apply Currency Conversion". Below this is a large, empty rectangular area labeled "Currency Conversion" at the top left, which appears to be a table or list area with a horizontal scrollbar. At the bottom of the dialog are three buttons: "Save Data As...", "Return", and "Help".

The following items are displayed:

Name holds the name of the investment to which you are applying the currency conversion.

From Currency holds the name of the currency the cashflow currently represents.

To Currency holds the name of the currency to which you wish to convert.

Exchange Rate holds the rate of exchange between the **From Currency** and the **To Currency**.

Apply Currency Conversion becomes available when you fill **Exchange Rate**. Clicking **Apply Currency Conversion** fills the **Currency Conversion** area.

Currency Conversion fills when you click **Apply Currency Conversion**. The schedule contains a row for each cashflow item with the following information:

- **Date** is a SAS date within the cashflow.
- The **From Currency** value is the amount in the original currency at that date.
- The **To Currency** value is the amount in the new currency at that date.

Print becomes available when you fill the **Currency Conversion** area. Clicking it sends the contents of the conversion table to the SAS session print device.

Save Data As becomes available when you fill the **Currency Conversion** area. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the conversion table (or portions thereof) as a SAS Dataset.

Return returns you to the [Investment Analysis](#) dialog box.

Constant Dollar Calculation

Having selected a generic cashflow from the Investment Analysis dialog box, to perform a constant dollar calculation, select **Compute** → **Constant Dollars** from the Investment Analysis dialog box's menu bar. This opens the Constant Dollar Calculation dialog box displayed in Figure 54.10.

Figure 54.10 Constant Dollar Calculation Dialog Box

The dialog box is titled "Constant Dollar Calculation". It contains the following elements:

- Name:** A text field containing "untitled_cashflow".
- Constant Inflation Rate:** An empty text field.
- Variable Inflation List:** A table with two columns: "Date" and "Rate". It contains one row with "01JAN2000" and "0.0000".
- Dates:** A list box containing "01JAN2000".
- Create Constant Dollar Equivalent:** A button located below the Variable Inflation List and Dates sections.
- Constant Dollar Equivalent Summary:** An empty list box at the bottom of the main area.
- Buttons:** "Save Data As...", "Return", and "Help" are located at the bottom of the dialog.

The following items are displayed:

Name holds the name of the investment for which you are computing the constant dollars value.

Constant Inflation Rate holds the constant inflation rate (a percentage between 0% and 120%). This value is used if the **Variable Inflation List** area is empty.

Variable Inflation List holds date-rate pairs that describe how inflation varies over time. Each date is a SAS date, and the rate is a percentage between 0% and 120%. Each date refers to when that inflation rate begins. Right-clicking within the **Variable Inflation** area reveals many helpful tools for managing date-rate pairs. If you assume a fixed inflation rate, just insert that rate in **Constant Rate**.

Dates holds the SAS date(s) at which you wish to compute the constant dollar equivalent. Right-clicking within the **Dates** area reveals many helpful tools for managing date lists.

Create Constant Dollar Equivalent becomes available when you enter inflation rate information. Clicking it fills the constant dollar equivalent summary with the computed constant dollar values.

Constant Dollar Equivalent Summary fills with a summary when you click **Create Constant Dollar Equivalent**. The first column lists the dates of the generic cashflow. The second column contains the constant dollar equivalent of the original generic cashflow item of that date.

Print becomes available when you fill the constant dollar equivalent summary. Clicking it sends the contents of the summary to the SAS session print device.

Save Data As becomes available when you fill the constant dollar equivalent summary. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the summary (or portions thereof) as a SAS Dataset.

Return returns you to the [Investment Analysis](#) dialog box.

Chapter 55

Analyses

Contents	
The Analyze Menu	3203
Tasks	3204
Performing Time Value Analysis	3204
Computing an Internal Rate of Return	3206
Performing a Benefit-Cost Ratio Analysis	3207
Computing a Uniform Periodic Equivalent	3208
Performing a Breakeven Analysis	3209
Dialog Box Guide	3211
Time Value Analysis	3211
Uniform Periodic Equivalent	3213
Internal Rate of Return	3214
Benefit-Cost Ratio Analysis	3214
Breakeven Analysis	3216
Breakeven Graph	3217

The Analyze Menu

Figure 55.1 shows the **Analyze** menu.

Figure 55.1 Analyze Menu



The **Analyze** menu offers the following options for use on applicable investments.

Time Value opens the [Time Value Analysis](#) dialog box. Time value analysis involves moving money through time across a defined minimum attractive rate of return (MARR) so that you can compare value at a consistent date. The MARR can be constant or variable over time.

Periodic Equivalent opens the [Uniform Periodic Equivalent](#) dialog box. Uniform periodic equivalent analysis determines the payment needed to convert a cashflow to uniform amounts over time, given a periodicity, a number of periods, and a MARR. This option helps when making comparisons where one alternative is uniform (such as renting) and another is not (such as buying).

Internal Rate of Return opens the [Internal Rate of Return](#) dialog box. The internal rate of return of a cashflow is the interest rate that makes the time value equal to 0. This calculation assumes uniform periodicity of the cashflow. It is particularly applicable where the choice of MARR would be difficult.

Benefit-Cost Ratio opens the [Benefit-Cost Ratio Analysis](#) dialog box. The benefit-cost ratio divides the time value of the benefits by the time value of the costs. For example, governments often use this analysis when deciding whether to commit to a public works project.

Breakeven Analysis opens the [Breakeven Analysis](#) dialog box. Breakeven analysis computes time values at various MARRs to compare, which can be advantageous when it is difficult to determine a MARR. This analysis can help you determine how the cashflow's profitability varies with your choice of MARR. A graph displaying the relationships between time value and MARR is also available.

Tasks

Performing Time Value Analysis

Suppose a rock quarry needs equipment to use the next five years. It has two alternatives:

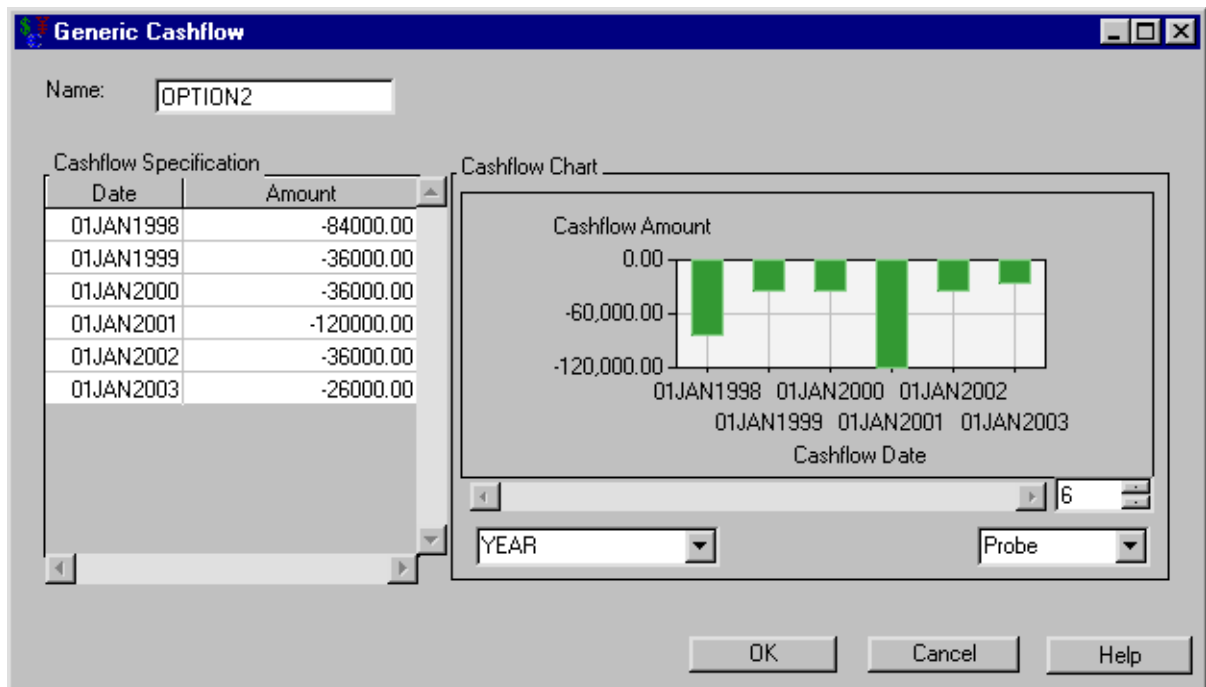
- a box loader and conveyer system that has a one-time cost of \$264,000
- a two-shovel loader, which costs \$84,000 but has a yearly operating cost of \$36,000. This loader has a service life of three years, which necessitates the purchase of a new loader for the final two years of the rock quarry project. Assume the second loader also costs \$84,000 and its salvage value after its two-year service is \$10,000. A SAS data set that describes this is available at `SASHELP.ROCKPIT`

You expect a 13% MARR. Which is the better alternative?

To create the cashflows, follow these steps:

1. Create a cashflow with the single amount –264,000. Date the amount 01JAN1998 to be consistent with the SAS data set you load.
2. Load SASHELP.ROCKPIT into a second cashflow, as displayed in [Figure 55.2](#).

Figure 55.2 The contents of SASHELP.ROCKPIT



To compute the time values of these investments, follow these steps:

1. Select both cashflows.
2. Select **Analyze** → **Time Value**. This opens the Time Value Analysis dialog box.
3. Enter the date 01JAN1998 into the **Dates** area.
4. Enter 13 for the **Constant MARR**.
5. Click **Create Time Value Summary**.

Figure 55.3 Performing the Time Value Analysis

Time Value Analysis

Analysis Specifications

Dates

Date
01JAN1998

Constant MARR: 13.00

MARR List

Date	MARR
------	------

Create Time Value Summary

Time Value Summary

Date	OPTION1	OPTION2
01JAN1998	-264000.00	-263408.94

Save Data As... Return Help

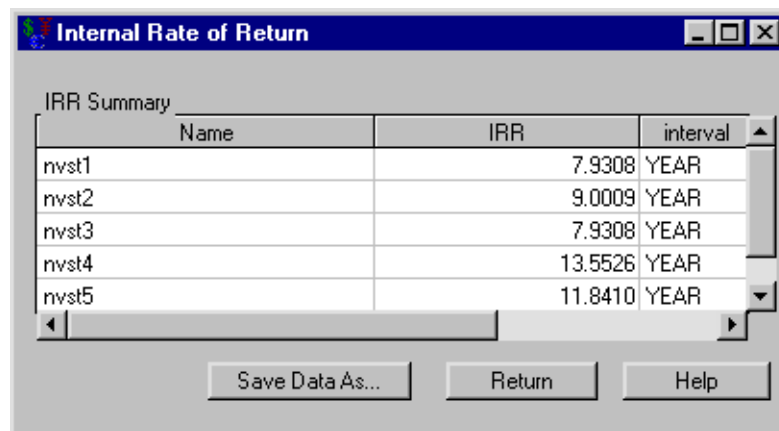
As shown in Figure 55.3, option 1 has a time value of $-\$264,000.00$ naturally on 01JAN1998. However, option 2 has a time value of $-\$263,408.94$, which is slightly less expensive.

Computing an Internal Rate of Return

You are choosing between five investments. A portfolio containing these investments is available at SASHELP.INVSAMP.NVST. Which investments are acceptable if you expect a MARR of 9%?

Open the portfolio SASHELP.INVSAMP.NVST and compare the investments. Note that Internal Rate of Return computations assume regular periodicity of the cashflow. To compute the internal rates of return, follow these steps:

1. Select all five investments.
2. Select **Analyze** → **Internal Rate of Return**.

Figure 55.4 Computing an Internal Rate of Return


The screenshot shows a software window titled "Internal Rate of Return". Inside, there is a section labeled "IRR Summary" containing a table with three columns: "Name", "IRR", and "interval". The table lists five investments: nvst1, nvst2, nvst3, nvst4, and nvst5. Below the table are three buttons: "Save Data As...", "Return", and "Help".

Name	IRR	interval
nvst1	7.9308	YEAR
nvst2	9.0009	YEAR
nvst3	7.9308	YEAR
nvst4	13.5526	YEAR
nvst5	11.8410	YEAR

The results displayed in Figure 55.4 indicate that the internal rates of return for investments 2, 4, and 5 are greater than 9%. Hence, each of these is acceptable.

Performing a Benefit-Cost Ratio Analysis

Suppose a municipality has excess funds to invest. It is choosing between the same investments described in the previous example. Government agencies often compute benefit-cost ratios to decide which investment to pursue. Which is best in this case?

Open the portfolio SASHELP.INVSAMP.NVST and compare the investments.

To compute the benefit-cost ratios, follow these steps:

1. Select all five investments.
2. Select **Analyze** → **Benefit-Cost Ratio**.
3. Enter 01JAN1996 for the **Date**.
4. Enter 9 for **Constant MARR**.
5. Click **Create Benefit-Cost Ratio Summary** to fill the **Benefit-Cost Ratio Summary** area.

The results displayed in Figure 55.5 indicate that investments 2, 4, and 5 have ratios greater than 1. Therefore, each is profitable with a MARR of 9%.

Figure 55.5 Performing a Benefit-Cost Ratio Analysis

Benefit-Cost Ratio Analysis

Analysis Specifications

Dates: 01JAN2000

Constant MARR: 9.00

MARR List

Benefit-Cost Ratio Summary

Date	nvst1	nvst2	nvst3	nvst4	nvst5
01JAN2000	0.9724	1.0000	0.9724	1.1349	1.0807

Buttons: Save Data As..., Return, Help

Computing a Uniform Periodic Equivalent

Suppose you need a warehouse for ten years. You have two options:

- pay rent for ten years at \$23,000 per year
- build a two-stage facility that you will maintain and which you intend to sell at the end of those ten years

Data sets describing these scenarios are available in the portfolio SASHELP.INVSAMP.BUYRENT. Which option is more financially sound if you desire a 12% MARR?

Open the portfolio SASHELP.INVSAMP.BUYRENT and compare the options.

To perform the periodic equivalent, follow these steps:

1. Load the portfolio SASHELP.INVSAMP.BUYRENT.
2. Select both cashflows.
3. Select **Analyze** → **Periodic Equivalent**.
This opens the Uniform Periodic Equivalent dialog box.
4. Enter 01JAN1996 for the **Start Date**.
5. Enter 10 for the **Number of Periods**.

6. Select YEAR for the **Interval**.
7. Enter 12 for the **Constant MARR**.
8. Click **Create Time Value Summary**.

Figure 55.6 Computing a Uniform Periodic Equivalent

Uniform Periodic Equivalent

Analysis Specifications

Start Date: 01JAN1996 Interval: YEAR

Number of Periods: 10 Constant MARR: 12.00

Create Periodic Equivalent Summary

Periodic Equivalent Summary

Name	Amount
buy	-21868.44
rent	-20535.71

Save Data As... Return Help

Figure 55.6 indicates that renting costs about \$1,300 less each year. Hence, renting is more financially sound. Notice the periodic equivalent for renting is not \$23,000. This is because the \$23,000 per year does not account for the MARR.

Performing a Breakeven Analysis

In the previous example you computed the uniform periodic equivalent for a rent-buy scenario. Now let's perform a breakeven analysis to see how the MARR affects the time values.

To perform the breakeven analysis, follow these steps:

1. Select both options.
2. Select **Analyze** → **Breakeven Analysis**.
3. Enter 01JAN1996 for the **Date**.
4. Enter 12.0 for **Value**.
5. Enter 4.0 for (+/-).

6. Enter 0.5 for **Increment by**.
7. Click **Create Breakeven Analysis Summary** to fill the **Breakeven Analysis Summary** area as displayed in Figure 55.7.

Figure 55.7 Performing a Breakeven Analysis

The screenshot shows the 'Breakeven Analysis' dialog box. The 'Analysis Specifications' section contains the following fields:

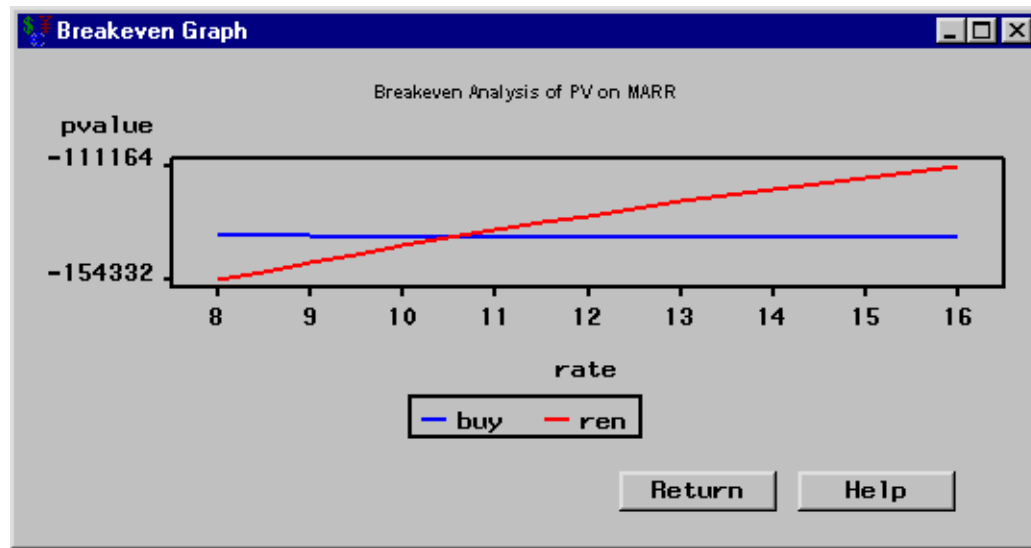
- Analysis: TIME VALUE (dropdown)
- Variable: MARR (dropdown)
- Date: 01JAN1996 (text box)
- Value: 12.00 (text box)
- +/-: 4.00 (text box)
- Increment by: 0.50 (text box)

Below these fields is a button labeled 'Create Breakeven Analysis Summary'. Below the button is a section titled 'Breakeven Analysis Summary' containing a table with the following data:

Date	buy	rent	MARR
01JAN1996	-138119.27	-111164.23	16.0000
01JAN1996	-138200.93	-113265.33	15.5000
01JAN1996	-138270.89	-115431.68	15.0000
01JAN1996	-138328.24	-117665.87	14.5000
01JAN1996	-138371.98	-119970.66	14.0000

At the bottom of the dialog box are four buttons: 'Graphics...', 'Save Data As...', 'Return', and 'Help'.

Click **Graphics** to view a plot displaying the relationship between time value and MARR.

Figure 55.8 Viewing a Breakeven Graph

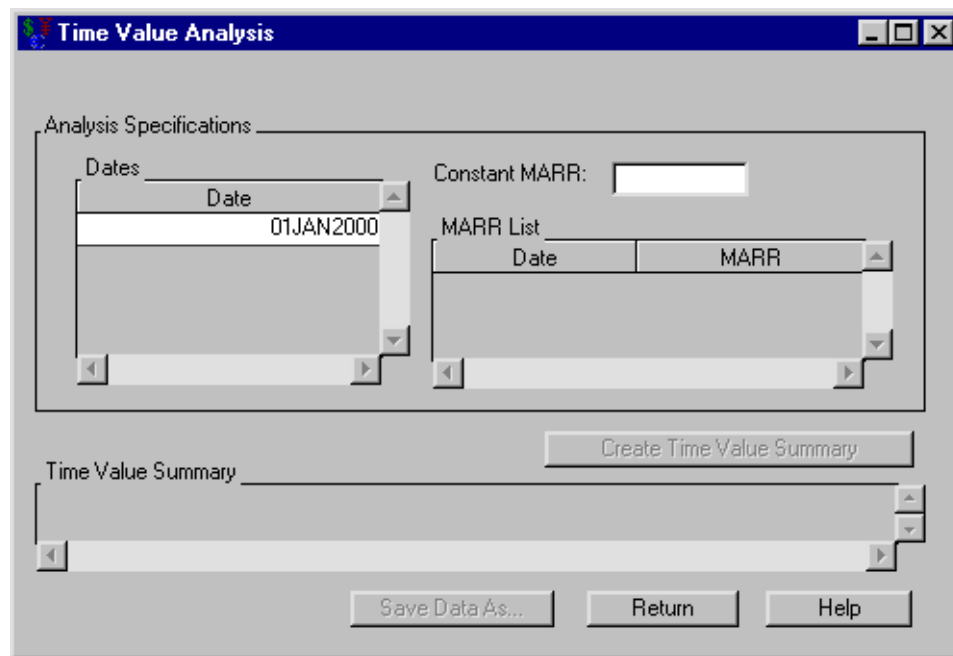
As shown in [Figure 55.8](#), renting is better if you want a MARR of 12%. However, if your MARR should drop to 10.5%, buying would be better.

With a single investment, knowing where the graph has a time value of 0 tells the MARR when a venture switches from being profitable to being a loss. With multiple investments, knowing where the graphs for the various investments cross each other tells at what MARR a particular investment becomes more profitable than another.

Dialog Box Guide

Time Value Analysis

Having selected a generic cashflow from the Investment Analysis dialog box, to perform an time value analysis, select **Analyze** → **Time Value** from the Investment Analysis dialog box's menu bar. This opens the Time Value Analysis dialog box displayed in [Figure 55.9](#).

Figure 55.9 Time Value Analysis Dialog Box

The following items are displayed:

Analysis Specifications

Dates holds the list of dates as of which to perform the time value analysis. [Right-clicking](#) within the **Dates** area reveals many helpful tools for managing date lists.

Constant MARR holds the desired MARR for the time value analysis. This value is used if the **MARR List** area is empty.

MARR List holds date-rate pairs that express your desired MARR as it changes over time. Each date refers to when that expected MARR begins. [Right-clicking](#) within the **MARR List** area reveals many helpful tools for managing date-rate pairs.

Create Time Value Summary becomes available when you adequately specify the analysis within the **Analysis Specifications** area. Clicking **Create Time Value Summary** then fills the **Time Value Summary** area.

Time Value Summary fills when you click **Create Time Value Summary**. The table contains a row for each date in the **Dates** area. The remainder of each row holds the time values at that date, one value for each investment selected.

Print becomes available when you fill the time value summary. Clicking it sends the contents of the summary to the SAS session print device.

Save Data As becomes available when you fill the time value summary. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the summary (or portions thereof) as a SAS Dataset.

Return takes you back to the [Investment Analysis](#) dialog box.

Uniform Periodic Equivalent

Having selected a generic cashflow from the Investment Analysis dialog box, to perform a uniform periodic equivalent, select **Analyze** → **Periodic Equivalent** from the Investment Analysis dialog box's menu bar. This opens the Uniform Periodic Equivalent dialog box displayed in [Figure 55.10](#).

Figure 55.10 Uniform Periodic Equivalent Dialog Box

The following items are displayed:

Analysis Specifications

Start Date holds the date the uniform periodic equivalents begin.

Number of Periods holds the number of uniform periodic equivalents.

Interval holds how often the uniform periodic equivalents occur.

Constant MARR holds the Minimum Attractive Rate of Return.

Create Periodic Equivalent Summary becomes available when you adequately fill the **Analysis Specification** area. Clicking **Create Periodic Equivalent Summary** then fills the periodic equivalent summary.

Periodic Equivalent Summary fills with two columns when you click **Create Periodic Equivalent Summary**. The first column lists the investments selected. The second column lists the computed periodic equivalent amount.

Print becomes available when you fill the periodic equivalent summary. Clicking it sends the contents of the summary to the SAS session print device.

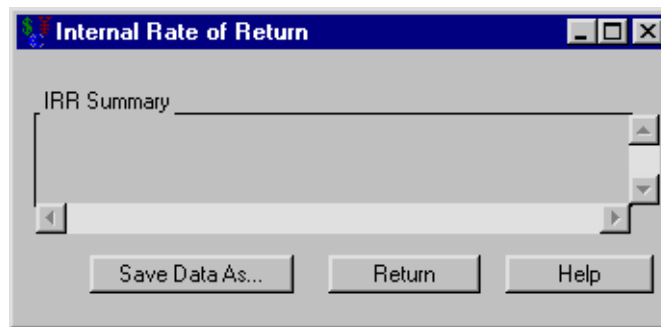
Save Data As becomes available when you generate the periodic equivalent summary. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the summary (or portions thereof) as a SAS Dataset.

Return takes you back to the [Investment Analysis](#) dialog box.

Internal Rate of Return

Having selected a generic cashflow from the Investment Analysis dialog box, to perform an internal rate of return calculation, select **Analyze** → **Internal Rate of Return** from the Investment Analysis dialog box's menu bar. This opens the Internal Rate of Return dialog box displayed in Figure 55.11.

Figure 55.11 Internal Rate of Return Dialog Box



The following items are displayed:

IRR Summary contains a row for each deposit. Each row holds:

Name holds the name of the investment.

IRR holds the internal rate of return for that investment.

interval holds the interest rate interval for that **IRR**.

Print becomes available when you fill the IRR summary. Clicking it sends the contents of the summary to the SAS session print device.

Save Data As opens the [Save Output Dataset](#) dialog box where you can save the IRR summary (or portions thereof) as a SAS data set.

Return takes you back to the [Investment Analysis](#) dialog box.

Benefit-Cost Ratio Analysis

Having selected a generic cashflow from the Investment Analysis dialog box, to compute a benefit-cost ratio, select **Analyze** → **Benefit-Cost Ratio** from the Investment Analysis dialog box's menu bar. This opens the Benefit-Cost Ratio Analysis dialog box displayed in Figure 55.12.

Figure 55.12 Benefit-Cost Ratio Analysis Dialog Box

The dialog box is titled "Benefit-Cost Ratio Analysis". It contains the following elements:

- Analysis Specifications:**
 - Dates:** A list box containing "01JAN2000".
 - Constant MARR:** An empty text input field.
 - MARR List:** A table with two columns: "Date" and "MARR".
- Benefit-Cost Ratio Summary:** A large, empty table area.
- Buttons:**
 - "Create Benefit-Cost Ratio Summary" (located between the two main sections).
 - "Save Data As..." (bottom left).
 - "Return" (bottom center).
 - "Help" (bottom right).

The following items are displayed:

Analysis Specifications

Dates holds the dates as of which to compute the Benefit-Cost ratios.

Constant MARR holds the desired MARR. This value is used if the **MARR List** area is empty.

MARR List holds date-rate pairs that express your desired MARR as it changes over time. Each date refers to when that expected MARR begins. [Right-clicking](#) within the **MARR List** area reveals many helpful tools for managing date-rate pairs.

Create Benefit-Cost Ratio Summary becomes available when you adequately specify the analysis. Clicking **Create Benefit-Cost Ratio Summary** fills the benefit-cost ratio summary.

Benefit-Cost Ratio Summary fills when you click **Exchange the Rates**. The area contains a row for each date in the **Dates** area. The remainder of each row holds the benefit-cost ratios at that date, one value for each investment selected.

Print becomes available when you fill the benefit-cost ratio summary. Clicking it sends the contents of the summary to the SAS session print device.

Save Data As becomes available when you generate the benefit-cost ratio summary. Clicking it opens the [Save Output Dataset](#) dialog box where you can save the summary (or portions thereof) as a SAS Dataset.

Return takes you back to the [Investment Analysis](#) dialog box.

Breakeven Analysis

Having selected a generic cashflow from the Investment Analysis dialog box, to perform a breakeven analysis, select **Analyze** → **Breakeven Analysis** from the Investment Analysis dialog box's menu bar. This opens the Breakeven Analysis dialog box displayed in Figure 55.13.

Figure 55.13 Breakeven Analysis Dialog Box

The screenshot shows the 'Breakeven Analysis' dialog box. The 'Analysis Specifications' section includes the following fields:

- Analysis:** A dropdown menu currently showing 'TIME VALUE'.
- Variable:** A dropdown menu currently showing 'MARR'.
- Date:** A text box containing '01JAN2000'.
- Value:** An empty text box.
- +/-:** An empty text box.
- Increment by:** An empty text box.

Below the specifications is a button labeled 'Create Breakeven Analysis Summary'. At the bottom of the dialog is a section titled 'Breakeven Analysis Summary' which contains a scrollable area for the results. Below this section are four buttons: 'Graphics...', 'Save Data As...', 'Return', and 'Help'.

The following items are displayed:

Analysis Specification

Analysis holds the analysis type. Only Time Value is currently available.

Date holds the date for which you perform this analysis.

Variable holds the variable upon which the breakeven analysis will vary. Only MARR is currently available.

Value holds the desired rate upon which to center the analysis.

+/- holds the maximum deviation from the **Value** to consider.

Increment by holds the increment by which the analysis is calculated.

Create Breakeven Analysis Summary becomes available when you adequately specify the analysis. Clicking **Create Breakeven Analysis Summary** then fills the **Breakeven Analysis Summary** area.

Breakeven Analysis Summary fills when you click **Create Breakeven Analysis Summary**. The schedule contains a row for each MARR and date.

Graphics becomes available when you fill the **Breakeven Analysis Summary** area. Clicking it opens the [Breakeven Graph](#) graph representing the time value versus MARR.

Print becomes available when you fill the breakeven analysis summary. Clicking it sends the contents of the summary to the SAS session print device.

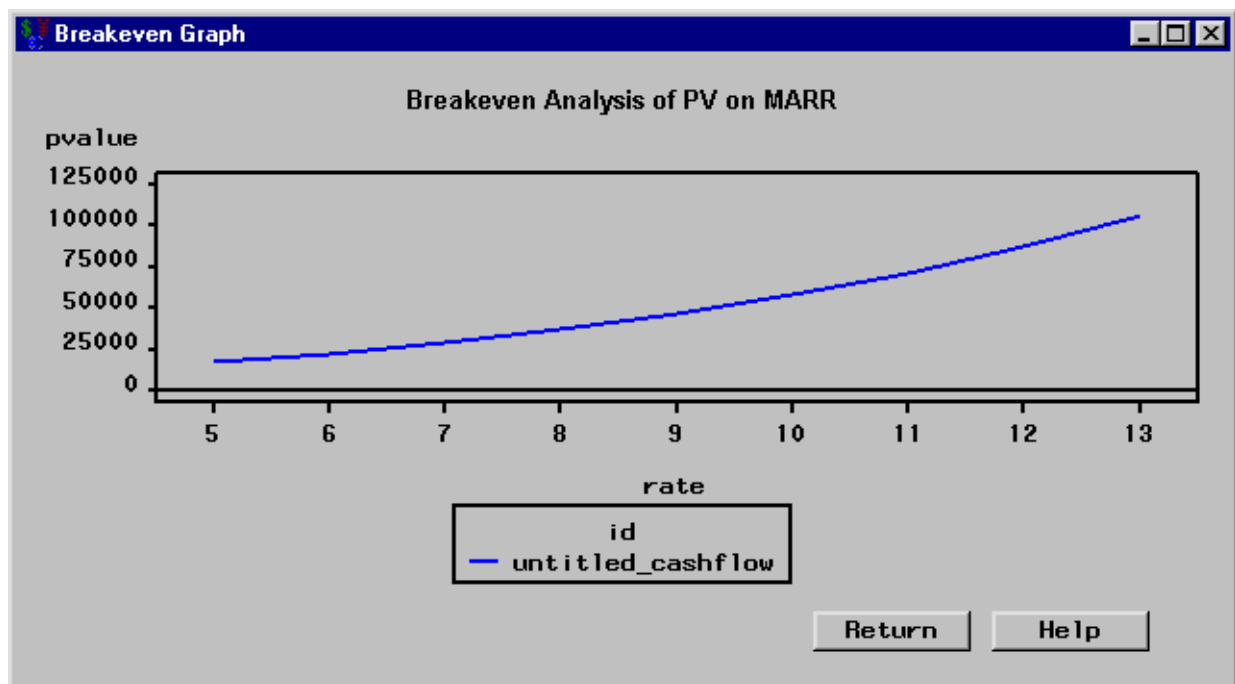
Save Data As becomes available when you generate the breakeven analysis summary. Clicking it opens the **Save Output Dataset** dialog box where you can save the summary (or portions thereof) as a SAS Dataset.

Return takes you back to the **Investment Analysis** dialog box.

Breakeven Graph

Suppose you perform a breakeven analysis in the Breakeven Analysis dialog box. Once you create the breakeven analysis summary, you can click the **Graphics** button to open the Breakeven Graph dialog box displayed in Figure 55.14.

Figure 55.14 Breakeven Graph Dialog Box



The following item is displayed:

Return takes you back to the **Breakeven Analysis** dialog box.

Chapter 56

Details

Contents

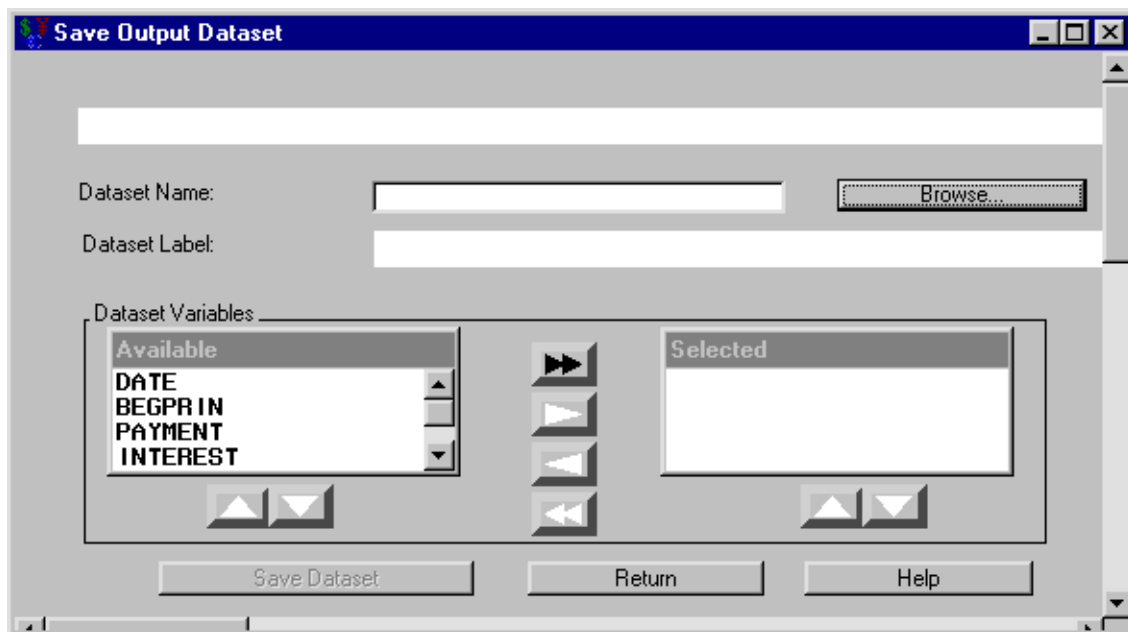
Investments and Data Sets	3219
Saving Output to SAS Data Sets	3219
Loading a SAS Data Set into a List	3221
Saving Data from a List to a SAS Data Set	3221
Right Mouse Button Options	3222
Depreciation Methods	3223
Straight Line (SL)	3223
Sum-of-Years Digits	3223
Declining Balance (DB)	3225
Rate Information	3226
The Tools Menu	3226
Dialog Box Guide	3227
Minimum Attractive Rate of Return (MARR)	3227
Income Tax Specification	3228
Inflation Specification	3229
Reference	3230

Investments and Data Sets

Investment Analysis provides tools to assist you in moving data between SAS data sets and lists you can use within Investment Analysis.

Saving Output to SAS Data Sets

Many investment specifications have a button that reads **Save Data As**. Clicking that button opens the Save Output Dataset dialog box (see [Figure 56.1](#)). This dialog box enables you to save all or part of the area generated by the specification.

Figure 56.1 Saving to a Dataset

The following items are displayed:

Dataset Name holds the SAS data set name to which you want to save.

Browse opens the standard SAS **Open** dialog box, which enables you to select an existing SAS data set to overwrite.

Dataset Label holds the SAS data set's label.

Dataset Variables organizes variables. The variables listed in the **Selected** area will be included in the SAS data set.

- You can select variables one at a time, by clicking the single right-arrow after each selection to move it to the **Selected** area.
- If the desired SAS data set has many variables you want to save, it may be simpler to follow these steps:
 1. Click the double right-arrow to select all available variables.
 2. Remove any unwanted variable by selecting it from the **Selected** area and clicking the single left-arrow.
- The double left-arrow removes all selected variables from the proposed SAS data set.
- The up and down arrows below the **Available** and **Selected** boxes enable you to scroll up and down the list of variables in their respective boxes.

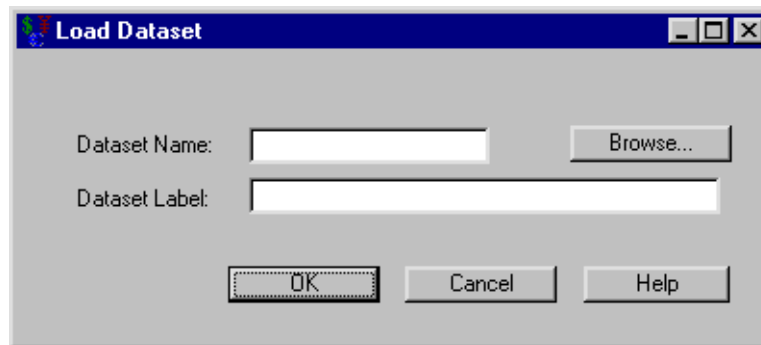
Save Dataset attempts to save the SAS data set. If the SAS data set name exists, you are asked if you want to replace the existing SAS data set, append to the existing SAS data set, or cancel the current save attempt. You then return to this dialog box ready to create another SAS data set to save.

Return takes you back to the specification dialog box.

Loading a SAS Data Set into a List

Right-click in the area that you want to load the list and release on **Load**. This opens the Load Dataset dialog box (see Figure 56.2).

Figure 56.2 Load Dataset Dialog Box



The following items are displayed:

Dataset Name holds the name of the SAS data set that you want to load.

Browse opens the standard SAS **Open** dialog box, which aids in finding a SAS data set to load. If there is a **Date** variable in the SAS data set, Investment Analysis loads it into the list. If there is no **Date** variable, it loads the first available time-formatted variable. If an amount or rate variable is needed, Investment Analysis searches the SAS data set for a **Amount** or **Rate** variable to use. Otherwise it takes the first numeric variable that is not used by the **Date** variable.

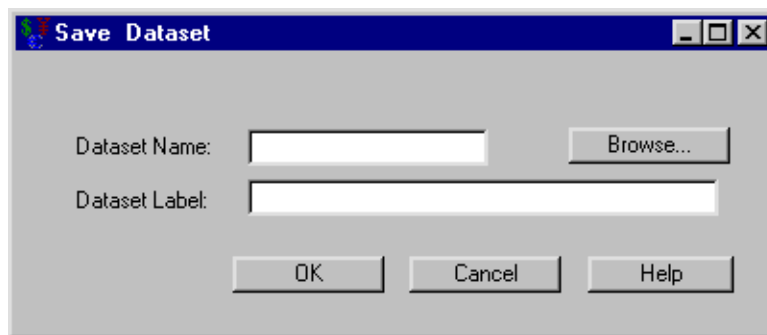
Dataset Label holds a SAS data set label.

OK attempts to load the SAS data set specified in **Dataset Name**. If the specified SAS data set exists, clicking **OK** returns you to the calling dialog box with the selected SAS data set filling the list. If the specified SAS data set does not exist and you click **OK**, you receive an error message and no SAS data set is loaded.

Cancel returns you to the calling dialog box without loading a SAS data set.

Saving Data from a List to a SAS Data Set

Right-click in the area you want to hold the list, and release on **Save**. This opens the Save Dataset dialog box.

Figure 56.3 Save Dataset Dialog Box

The following items are displayed:

Dataset Name holds the SAS data set name to which you want to save.

Browse opens the standard SAS **Save As** dialog box, which enables you to find an existing SAS data set to overwrite.


Dataset Label holds a user-defined description to be saved as the label of the SAS data set.

OK saves the current data to the SAS data set specified in **Dataset Name**. If the specified SAS data set does not already exist, clicking **OK** saves the SAS data set and returns you to the calling dialog box. If the specified SAS data set does already exist, clicking **OK** warns you and enables you to replace the old SAS data set with the new SAS data set or cancel the save attempt.

Cancel aborts the save process. Clicking **Cancel** returns you to the calling dialog box without attempting to save.

Right Mouse Button Options

A pop-up menu often appears when you right-click within table editors. The menus offer tools to aid in the management of the table's entries. Most table editors provide the following options.

Figure 56.4 Right-Clicking Options

Add creates a blank row.

Delete removes any currently selected row.

Copy duplicates the currently selected row.

Sort arranges the rows in chronological order according to the date variable.

Clear empties the table of all rows.

Save opens the [Save Dataset](#) dialog box where you can save the all rows to a SAS Dataset for later use.

Load opens the [Load Dataset](#) dialog box where you select a SAS Dataset to fill the rows.

If you want to perform one of these actions on a collection of rows, you must select a collection of rows before right-clicking. To select an adjacent list of rows, do the following: click the first pair, hold down SHIFT, and click the final pair. After the list of rows is selected, you may release the SHIFT key.

Depreciation Methods

Suppose an asset's price is \$20,000 and it has a salvage value of \$5,000 in five years. The following sections describe various methods to quantify the depreciation.

Straight Line (SL)

This method assumes a constant depreciation value per year.

Assuming that the price of a depreciating asset is P and its salvage value after N years is S , the annual depreciation is:

$$\frac{P - S}{N}$$

For our example, the annual depreciation would be

$$\frac{\$20,000 - \$5,000}{5} = \$3,000$$

Sum-of-Years Digits

An asset often loses more of its value early in its lifetime. A method that exhibits this dynamic is desirable.

Assume an asset depreciates from price P to salvage value S in N years. First compute the sum-of-years as $T = 1 + 2 + \cdots + N$. The depreciation for the years after the asset's purchase is:

Table 56.1 Sum-of-Years General Example

Year Number	Annual Depreciation
first	$\frac{N}{T}(P - S)$
second	$\frac{N-1}{T}(P - S)$
third	$\frac{N-2}{T}(P - S)$
\vdots	\vdots
final	$\frac{1}{T}(P - S)$

For the i th year of the asset's use, the annual depreciation is:

$$\frac{N + 1 - i}{T}(P - S)$$

For our example, $N = 5$ and the sum of years is $T = 1 + 2 + 3 + 4 + 5 = 15$. The depreciation during the first year is

$$(\$20,000 - \$5,000)\frac{5}{15} = \$5,000$$

Table 56.2 describes how Declining Balance would depreciate the asset.

Table 56.2 Sum-of-Years Example

Year	Depreciation	Year-End Value
1	$(\$20,000 - \$5,000)\frac{5}{15} = \$5,000$	\$15,000.00
2	$(\$20,000 - \$5,000)\frac{4}{15} = \$4,000$	\$11,000.00
3	$(\$20,000 - \$5,000)\frac{3}{15} = \$3,000$	\$8,000.00
4	$(\$20,000 - \$5,000)\frac{2}{15} = \$2,000$	\$6,000.00
5	$(\$20,000 - \$5,000)\frac{1}{15} = \$1,000$	\$5,000.00

As expected, the value after N years is S .

$$\begin{aligned}
 S &= P - (5 \text{ years' depreciation}) \\
 &= P - \left(\frac{5}{15}(P - S) + \frac{4}{15}(P - S) + \frac{3}{15}(P - S) + \frac{2}{15}(P - S) + \frac{1}{15}(P - S) \right) \\
 &= P - (P - S)
 \end{aligned}$$

Declining Balance (DB)

Recall that the straight line method assumes a constant depreciation value. Conversely, the declining balance method assumes a constant depreciation rate per year. And like the sum-of-years method, more depreciation tends to occur earlier in the asset's life.

Assume the price of a depreciating asset is P and its salvage value after N years is S . You could assume the asset depreciates by a factor of $\frac{1}{N}$ (or a rate of $\frac{100}{N}\%$). This method is known as single declining balance. The annual depreciation is:

$$\frac{1}{N}(\text{previous year's value})$$

So for our example, the depreciation during the first year is $\frac{\$20,000}{5} = \$4,000$. Table 56.3 describes how declining balance would depreciate the asset.

Table 56.3 Declining Balance Example

Year	Depreciation	Year-End Value
1	$\frac{\$20,000.00}{5} = \$4,000.00$	\$16,000.00
2	$\frac{\$16,000.00}{5} = \$3,200.00$	\$12,800.00
3	$\frac{\$12,800.00}{5} = \$2,560.00$	\$10,240.00
4	$\frac{\$10,240.00}{5} = \$2,048.00$	\$8,192.00
5	$\frac{\$12,800.00}{5} = \$1,638.40$	\$6,553.60

DB Factor

You could also accelerate the depreciation by increasing the factor (and hence the rate) at which depreciation occurs. Other commonly accepted depreciation rates are $\frac{200}{N}\%$ (called double declining balance as the depreciation factor becomes $\frac{2}{N}$) and $\frac{150}{N}\%$. Investment Analysis enables you to choose between these three types for declining balance: 2 (with $\frac{200}{N}\%$ depreciation), 1.5 (with $\frac{150}{N}\%$), and 1 (with $\frac{100}{N}\%$).

Declining Balance and the Salvage Value

The declining balance method assumes that depreciation is faster earlier in an asset's life; this is what you wanted. But notice the final value is greater than the salvage value. Even if the salvage value were greater than \$6,553.60, the final year-end value would not change. The salvage value never enters the calculation, so there is no way for the salvage value to force the depreciation to assume its value. Newnan and Lavelle (1998) describe two ways to adapt the declining balance method to assume the salvage value at the final time. One way is as follows:

Suppose you call the depreciated value after i years $V(i)$. This sets $V(0) = P$ and $V(N) = S$.

- If $V(N) > S$ according to the usual calculation for $V(N)$, redefine $V(N)$ to equal S .

- If $V(i) < S$ according to the usual calculation for $V(i)$ for some i (and hence for all subsequent $V(i)$ values), you can redefine all such $V(i)$ to equal S .

This alteration to declining balance forces the depreciated value of the asset after N years to be S and keeps $V(i)$ no less than S .

Conversion to SL

The second (and preferred) way to force declining balance to assume the salvage value is by conversion to straight line. If $V(N) > S$, the first way redefines $V(N)$ to equal S ; you can think of this as converting to the straight line method for the last timestep.

If the $V(N)$ value supplied by DB is appreciably larger than S , then the depreciation in the final year would be unrealistically large. An alternate way is to compute the DB and SL step at each timestep and take whichever step gives a larger depreciation (unless DB drops below the salvage value).

After SL assumes a larger depreciation, it continues to be larger over the life of the asset. SL forces the value at the final time to equal the salvage value. As an algorithm, this looks like the following statements:

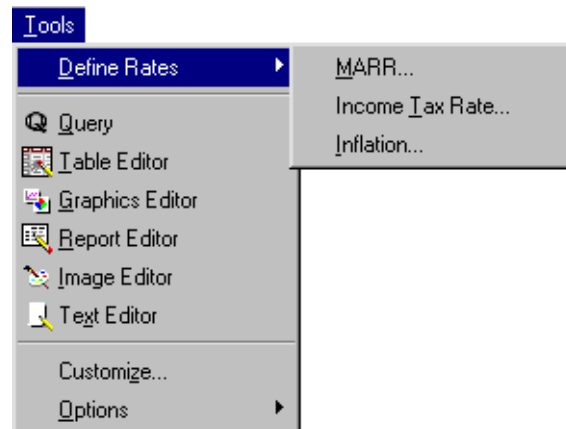
```
V(0) = P;
for i=1 to N
    if DB step > SL step from (i,V(i))
        take a DB step to make V(i);
    else
        break;
for j = i to N
    take a SL step to make V(j);
```

The MACRS, which is discussed in the section that describes the [Depreciation Table](#) window, is actually a variation on the declining balance method with conversion to the straight line method.

Rate Information

The Tools Menu

Figure 56.5 shows the **Tools** menu.

Figure 56.5 The Tools Menu

The **Tools** → **Define Rates** menu offers the following options.

MARR opens the **Minimum Attractive Rate of Return (MARR)** dialog box.

Income Tax Rate opens the **Income Tax Specification** dialog box.

Inflation opens the **Inflation Specification** dialog box.

Dialog Box Guide

Minimum Attractive Rate of Return (MARR)

Selecting **Tools** → **Define Rates** → **MARR** from the Investment Analysis dialog box menu bar opens the MARR dialog box that is displayed in Figure 56.6.

Figure 56.6 MARR Dialog Box

The dialog box is titled "Minimum Attractive Rate of Return (MARR)". It contains the following elements:

- Name:** A text input field.
- Constant MARR:** A numeric input field.
- MARR List:** A table editor with two columns: "Date" and "MARR". The table is currently empty.
- Buttons:** "OK", "Cancel", and "Help" buttons at the bottom.

Name holds the name that you assign to the MARR specification. This must be a valid SAS name.

Constant MARR holds the numeric value that you choose to be the constant MARR. This value is used if the **MARR List** table editor is empty.

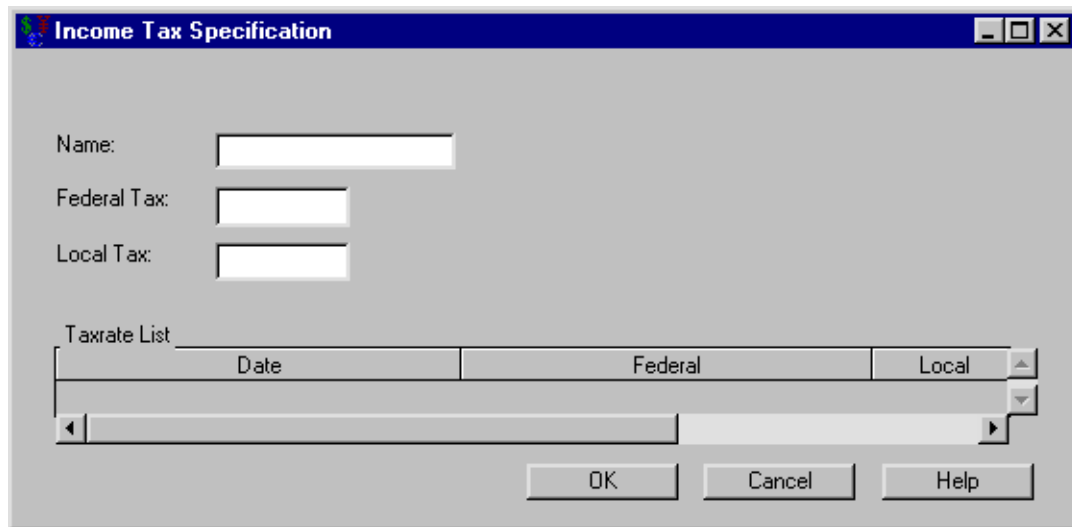
MARR List holds date-MARR pairs where the date refers to when the particular MARR value begins. Each date is a SAS date.

OK returns you to the [Investment Analysis](#) dialog box. Clicking it causes the preceding MARR specification to be assumed when you do not specify MARR rates in a dialog box that needs MARR rates.

Cancel returns you to the [Investment Analysis](#) dialog box, discarding any work that was done in the MARR dialog box.

Income Tax Specification

Selecting **Tools** → **Define Rates** → **Income Tax Rate** from the Investment Analysis dialog box menu bar opens the Income Tax Specification dialog box displayed in [Figure 56.7](#).

Figure 56.7 Income Tax Specification Dialog Box


The dialog box is titled "Income Tax Specification". It contains three input fields: "Name:", "Federal Tax:", and "Local Tax:". Below these is a "Taxrate List" table with columns for "Date", "Federal", and "Local". The table is currently empty. At the bottom are three buttons: "OK", "Cancel", and "Help".

Date	Federal	Local

Name holds the name you assign to the Income Tax specification. This must be a valid SAS name.

Federal Tax holds the numeric value that you want to be the constant Federal Tax.

Local Tax holds the numeric value that you want to be the constant Local Tax.

Taxrate List holds date-Income Tax triples where the date refers to when the particular Income Tax value begins. Each date is a SAS date, and the value is a percentage between 0% and 100%.

OK returns you to the [Investment Analysis](#) dialog box. Clicking it causes the preceding income tax specification to be the default income tax rates when using the [After Tax Cashflow Calculation](#) dialog box.

Cancel returns you to the [Investment Analysis](#) dialog box, discarding any changes that were made since this dialog box was opened.

Inflation Specification

Selecting **Tools** → **Define Rates** → **Inflation** from the Investment Analysis dialog box menu bar opens the Inflation Specification dialog box displayed in [Figure 56.8](#).

Figure 56.8 Inflation Specification Dialog Box

The dialog box is titled "Inflation Specification". It contains the following elements:

- Name:** A text input field.
- Constant Rate:** A numeric input field.
- Inflation Rate List:** A table editor with two columns: "Date" and "Rate". The table is currently empty.
- Buttons:** "OK", "Cancel", and "Help" buttons at the bottom.

Name holds the name that you assign to the Inflation specification. This must be a valid SAS name.

Constant Rate holds the numeric value that you want to be the constant inflation rate. This value is used if the **Inflation Rate List** table editor is empty.

Inflation Rate List holds date-rate pairs where the date refers to when the particular inflation rate begins. Each date is a SAS date and the rate is a percentage between 0% and 120%.

OK returns you to the [Investment Analysis](#) dialog box. Clicking it causes the preceding inflation specification to be assumed when you use the [Constant Dollar Calculation](#) dialog box and do not specify inflation rates.

Cancel returns you to the [Investment Analysis](#) dialog box, discarding any changes that were made since this dialog box was opened.

Reference

Newnan, Donald G. and Lavelle, Jerome P. (1998), *Engineering Economic Analysis*, Austin, Texas: Engineering Press.

Subject Index

Symbols

@CRSPDB Date Informat
SASECRSP engine, [2597](#)
@CRSPDR Date Informat
SASECRSP engine, [2597](#)
@CRSPDT Date Informat
SASECRSP engine, [2597](#)
2SLS estimation method, *see* two-stage least squares
3SLS estimation method, *see* three-stage least squares

A

add factors, *see* adjustments
additive model
ARIMA model, [215](#)
additive Winters method
seasonal forecasting, [875](#)
additive-invertible region
smoothing weights, [3109](#)
ADDWINTERS method
FORECAST procedure, [875](#)
ADF test, [352](#)
adjacency graph
MODEL procedure, [1255](#)
adjust operators, [826](#)
adjustable rate mortgage, *see* LOAN procedure
LOAN procedure, [902](#)
adjusted R squared
MODEL procedure, [1106](#)
adjusted R-square
statistics of fit, [2182](#), [3127](#)
adjustments, [2994](#), [3105](#)
add factors, [2963](#)
forecasting models, [2963](#)
specifying, [2963](#)
After Tax Cashflow Calculation, [3192](#)
AGGREGATE method
EXPAND procedure, [812](#)
aggregation of
time series data, [793](#), [796](#)
aggregation of time series
EXPAND procedure, [793](#), [796](#)
AIC, *see* Akaike information criterion, *see* Akaike's
information criterion
Akaike Information Criterion
VARMAX procedure, [2320](#)
Akaike information criterion

AIC, [253](#)
ARIMA procedure, [253](#)
AUTOREG procedure, [379](#)
used to select state space models, [1853](#)
Akaike information criterion corrected
AUTOREG procedure, [379](#)
Akaike's information criterion
AIC, [3127](#)
statistics of fit, [3127](#)
alignment of
dates, [3021](#)
time intervals, [128](#)
alignment of dates, [144](#), [3021](#)
Almon lag polynomials, *see* polynomial distributed
lags
MODEL procedure, [1179](#)
alternatives to
DIF function, [106](#)
LAG function, [106](#)
Amemiya's prediction criterion
statistics of fit, [3127](#)
Amemiya's R-square
statistics of fit, [2182](#), [3127](#)
AMO, [57](#)
amortization schedule
LOAN procedure, [930](#)
analyzing models
MODEL procedure, [1250](#)
and goal seeking
ordinary differential equations (ODEs), [1152](#)
and state space models
stationarity, [1833](#)
and tests for autocorrelation
lagged dependent variables, [327](#)
and the OUTPUT statement
output data sets, [81](#)
Annuity, *see* Uniform Periodic Equivalent
AR initial conditions
conditional least squares, [1169](#)
Hildreth-Lu, [1169](#)
maximum likelihood, [1169](#)
unconditional least squares, [1169](#)
Yule-Walker, [1169](#)
ARCH model
AUTOREG procedure, [315](#)
autoregressive conditional heteroscedasticity,
[315](#)
ARIMA model

- additive model, 215
- ARIMA procedure, 194
- autoregressive integrated moving-average model, 194, 3118
- Box-Jenkins model, 194
- factored model, 215
- multiplicative model, 215
- notation for, 210
- seasonal model, 215
- simulating, 2999, 3090
- subset model, 215
- ARIMA model specification, 2997, 3028
- ARIMA models
 - forecasting models, 2907
 - specifying, 2907
- ARIMA procedure
 - Akaike information criterion, 253
 - ARIMA model, 194
 - ARIMAX model, 194, 216
 - ARMA model, 194
 - autocorrelations, 197
 - autoregressive parameters, 258
 - BY groups, 230
 - conditional forecasts, 259
 - confidence limits, 259
 - correlation plots, 197
 - cross-correlation function, 242
 - data requirements, 224
 - differencing, 213, 249, 256
 - factored model, 215
 - finite memory forecasts, 260
 - forecasting, 259, 261
 - Gauss-Marquardt method, 252
 - ID variables, 261
 - infinite memory forecasts, 259
 - input series, 216
 - interaction effects, 220
 - intervention model, 216, 219, 222, 299
 - inverse autocorrelation function, 241
 - invertibility, 257
 - Iterative Outlier Detection, 308
 - log transformations, 260
 - Marquardt method, 252
 - Model Identification, 301
 - moving-average parameters, 258
 - naming model parameters, 258
 - ODS graph names, 277
 - ODS Graphics, 227
 - Outlier Detection, 306
 - output data sets, 264–266, 268, 269
 - output table names, 273
 - predicted values, 259
 - prewhitening, 249
 - printed output, 270
 - rational transfer functions, 222
 - regression model with ARMA errors, 216, 217
 - residuals, 259
 - Schwarz Bayesian criterion, 253
 - seasonal model, 215
 - stationarity, 198
 - subset model, 215
 - syntax, 224
 - time intervals, 261
 - transfer function model, 216, 220, 253
 - unconditional forecasts, 260
- ARIMA process specification, 2999
- ARIMAX model
 - ARIMA procedure, 194, 216
- ARIMAX models and
 - design matrix, 220
- ARMA model
 - ARIMA procedure, 194
 - autoregressive moving-average model, 194
 - MODEL procedure, 1165
 - notation for, 210
- as time ID
 - observation numbers, 2885
- asymptotic distribution of impulse response functions
 - VARMAX procedure, 2307, 2315
- asymptotic distribution of the parameter estimation
 - VARMAX procedure, 2315
- at annual rates
 - percent change calculations, 108
- at sign (@) operator
 - COUNTREG procedure, 571
 - TCOUNTREG procedure, 1957
- attributes
 - DATASOURCE procedure, 600
- attributes of variables
 - DATASOURCE procedure, 624
- audit trail, 3021
- Augmented Dickey-Fuller (ADF) test, 352
- augmented Dickey-Fuller tests, 233, 248
- autocorrelation, 1136
- autocorrelation tests, 1136
 - Durbin-Watson test, 349
 - Godfrey Lagrange test, 1136
 - Godfrey's test, 349
- autocorrelations
 - ARIMA procedure, 197
 - multivariate, 1835
 - plotting, 197
 - prediction errors, 2872
 - series, 2937
- automatic forecasting
 - FORECAST procedure, 846
 - STATESPACE procedure, 1830
- automatic generation

- between, 1367
- between levels and rates
 - interpolation, 121
- between stocks and flows
 - interpolation, 121
- BIC, *see* Schwarz Bayesian information criterion
- block structure
 - MODEL procedure, 1255
- BLS consumer price index surveys
 - DATASOURCE procedure, 636
- BLS data files, *see* DATASOURCE procedure
- BLS national employment, hours, and earnings survey
 - DATASOURCE procedure, 637
- BLS producer price index survey
 - DATASOURCE procedure, 637
- BLS state and area employment, hours, and earnings survey
 - DATASOURCE procedure, 638
- Bond, 3160
- BOPS data file
 - DATASOURCE procedure, 654
- boundaries
 - smoothing weights, 3109
- bounds on parameter estimates, 717, 1054, 1460
- BOUNDS statement, 717, 1054, 1460
- Box Cox
 - transformations, 3105
- Box Cox transformation, *see* transformations
- Box-Cox transformation
 - BOXCOXAR macro, 154
- Box-Jenkins model, *see* ARIMA model
- BOXCOXAR macro
 - Box-Cox transformation, 154
 - output data sets, 155
 - SAS macros, 154
- break even analysis
 - LOAN procedure, 926
- Breakeven Analysis, 3209
- Breusch-Pagan test, 1129
 - heteroscedasticity tests, 1129
- Brown smoothing model, *see* double exponential smoothing
- Bureau of Economic Analysis data files, *see* DATASOURCE procedure
- Bureau of Labor Statistics data files, *see* DATASOURCE procedure
- buydown rate loans, *see* LOAN procedure
 - LOAN procedure, 902
- BY groups
 - ARIMA procedure, 230
 - AUTOREG procedure, 344
 - COUNTREG procedure, 563
 - cross-sectional dimensions and, 77
 - ESM procedure, 761

- EXPAND procedure, 803
- FORECAST procedure, 867
- MDC procedure, 966
- PANEL procedure, 1348
- PDLREG procedure, 1430
- SEVERITY procedure, 1545
- SIMILARITY procedure, 1650
- SIMLIN procedure, 1714
- SPECTRA procedure, 1744
- SSM procedure, 1777
- STATESPACE procedure, 1847
- SYSLIN procedure, 1900
- TCOUNTREG procedure, 1948
- TIMESERIES procedure, 2032
- TSCSREG procedure, 2099
- UCM procedure, 2124
- X11 procedure, 2412
- X12 procedure, 2489
- BY groups and
 - time series cross-sectional form, 77

C

- CAL, 535
- calculation of
 - leads, 110
- calculations
 - smoothing models, 3107
- calendar calculations
 - functions for, 93, 145
 - interval functions and, 102
 - time intervals and, 102
- calendar calculations and
 - INTCK function, 102
 - INTNX function, 102
 - time intervals, 102
- calendar functions and
 - date values, 94
- calendar variables, 93
 - computing dates from, 94
 - computing from dates, 94
 - computing from datetime values, 96
- Calibration Estimation, 535
- canonical correlation analysis
 - for selection of state space models, 1831, 1854
 - STATESPACE procedure, 1831, 1854
- Canonical Maximum Likelihood Estimation, 534
- Cashflow, *see* Generic Cashflow
- CATALOG procedure, 47
 - SAS catalogs, 47
- Cauchy distribution estimation
 - example, 1295
 - examples, 1295
- CDT (COMPUTAB data table)

- COMPUTAB procedure, 483
- ceiling of
 - time intervals, 100
- Censored Regression Models
 - QLIM procedure, 1474
- Census X-11 method, *see* X11 procedure
- Census X-11 methodology
 - X11 procedure, 2425
- Census X-12 method, *see* X12 procedure
- Center for Research in Security Prices data files, *see* DATASOURCE procedure
- centered moving time window operators, 817, 818
- change vector, 1106
- changes in trend
 - forecasting models, 2971
- changing by interpolation
 - frequency, 121, 793, 805
 - periodicity, 121, 793
 - sampling frequency, 121
- changing periodicity
 - EXPAND procedure, 121
 - time series data, 121, 793
- character functions, 48
- character variables
 - MODEL procedure, 1232
- CHART procedure, 47
 - histograms, 47
- checking data periodicity
 - INTNX function, 101
 - time intervals, 101
- Chirp-Z algorithm
 - SPECTRA procedure, 1746
- choice of
 - instrumental variables, 1162
- Cholesky root
 - AUTOREG procedure, 367
- Chow test, 348, 350, 400
- Chow test for
 - structural change, 348
- Chow tests, 1159
 - MODEL procedure, 1159
- CITIBASE format
 - DATASOURCE procedure, 603
- CITIBASE old format
 - DATASOURCE procedure, 640
- CITIBASE PC format
 - DATASOURCE procedure, 640
- classical decomposition operators, 821
- classification variables
 - COUNTREG procedure, 569
 - TCOUNTREG procedure, 1955
- Clayton copula, 529
- CMLE, 534
- Cochrane-Orcutt method
 - AUTOREG procedure, 369
- coherency
 - cross-spectral analysis, 1751
- coherency of cross-spectrum
 - SPECTRA procedure, 1751
- cointegration
 - VARMAX procedure, 2322
- cointegration test, 351, 386
- cointegration testing
 - VARMAX procedure, 2266, 2326
- collinearity diagnostics
 - MODEL procedure, 1111, 1119
- column blocks
 - COMPUTAB procedure, 484
- column selection
 - COMPUTAB procedure, 481, 482
- COLxxxx: label
 - COMPUTAB procedure, 475
- combination models
 - forecasting models, 2924
 - specifying, 2924
- combined seasonality test, 2442, 2517
- combined with cross-sectional dimension
 - interleaved time series, 79
- combined with interleaved time series
 - cross-sectional dimensions, 79
- combining forecasts, 3029, 3104
- combining time series data sets, 116
- Command Reference, 2985
- common trends
 - VARMAX procedure, 2322
- common trends testing
 - VARMAX procedure, 2268, 2323
- COMPARE procedure, 47
 - comparing SAS data sets, 47
- comparing
 - forecasting models, 2947, 3043
- comparing forecasting models, 2947, 3043
- comparing loans
 - LOAN procedure, 909, 926, 930
- comparing SAS data sets, *see* COMPARE procedure
- compiler listing
 - MODEL procedure, 1247
- COMPUSTAT data files, *see* DATASOURCE procedure
 - DATASOURCE procedure, 641
- COMPUSTAT IBM 360/370 general format 48
 - quarter files
 - DATASOURCE procedure, 642
- COMPUSTAT IBM 360/370 general format annual
 - files
 - DATASOURCE procedure, 641
- COMPUSTAT universal character format 48
 - quarter files

- DATASOURCE procedure, 644
- COMPUSTAT universal character format annual files
 - DATASOURCE procedure, 643
- COMPUTAB procedure
 - CDT (COMPUTAB data table), 483
 - column blocks, 484
 - column selection, 481, 482
 - COLxxxxx: label, 475
 - consolidation tables, 476
 - controlling row and column block execution, 483
 - input block, 484
 - missing values, 486
 - order of calculations, 480
 - output data sets, 486
 - program flow, 477
 - programming statements, 474
 - reserved words, 486
 - row blocks, 485
 - ROWxxxxx: label, 475
 - table cells, direct access to, 485
- computational details
 - VARMAX procedure, 2364
- computing calendar variables from
 - datetime values, 96
- computing ceiling of intervals
 - INTNX function, 100
- computing dates from
 - calendar variables, 94
- computing datetime values from
 - date values, 95
- computing ending date of intervals
 - INTNX function, 99
- computing from calendar variables
 - datetime values, 95
- computing from dates
 - calendar variables, 94
- computing from datetime values
 - calendar variables, 96
 - date values, 95
 - time variables, 96
- computing from time variables
 - datetime values, 95
- computing lags
 - RETAIN statement, 106
- computing midpoint date of intervals
 - INTNX function, 99
- computing time variables from
 - datetime values, 96
- computing widths of intervals
 - INTNX function, 99
- concatenated
 - data set, 2852
- concentrated likelihood Hessian, 1100
- conditional forecasts
 - ARIMA procedure, 259
- conditional least squares
 - AR initial conditions, 1169
 - MA Initial Conditions, 1169
- conditional logit model
 - MDC procedure, 944, 945, 980
- conditional t distribution
 - GARCH model, 375
- conditional variance
 - AUTOREG procedure, 403
 - predicted values, 403
 - predicting, 403
- confidence limits, 2878
 - ARIMA procedure, 259
 - AUTOREG procedure, 361
 - FORECAST procedure, 880
 - forecasts, 2878
 - PDLREG procedure, 1434
 - STATESPACE procedure, 1863
 - VARMAX procedure, 2351
- consolidation tables
 - COMPUTAB procedure, 476
- Constant Dollar Calculation, 3196
- constrained estimation
 - heteroscedasticity models, 358
- Consumer Price Index Surveys, *see* DATASOURCE procedure
- contemporaneous correlation of
 - errors across equations, 1911
- contents of
 - SAS data sets, 47
- CONTENTS procedure, 47
 - SASECRSP engine, 2582
 - SASEFAME engine, 2719
- continuous compounding
 - LOAN procedure, 924
- continuous variables, 569, 1955
- contrasted with flow variables
 - stocks, 796
- contrasted with flows or rates
 - levels, 796
- contrasted with missing values
 - omitted observations, 76
- contrasted with omitted observations
 - missing observations, 76
 - missing values, 76
- contrasted with stock variables
 - flows, 796
- contrasted with stocks or levels
 - rates, 796
- control charts, 54
- control key
 - for multiple selections, 2840
- control variables

- MODEL procedure, 1230
- controlling row and column block execution
 - COMPUTAB procedure, 483
- controlling starting values
 - MODEL procedure, 1112
- convergence criteria
 - MODEL procedure, 1107
- convergence problems
 - VARMAX procedure, 2364
- conversion methods
 - EXPAND procedure, 811
- convert option
 - SASEFAME engine, 2719
- Converting Dates Using the CRSP Date Functions
 - SASECRSP engine, 2595
- converting frequency of
 - time series data, 793
- copula
 - Clayton, 529
 - Frank, 529
 - Gumbel, 529
 - normal, 525
 - Student T, 526
- COPULA procedure, 511
 - ODS graph names, 539
 - output table names, 539
 - overview, 512
 - syntax, 516
- COPY procedure, 47
- copying
 - SAS data sets, 47
- CORR procedure, 47
- corrected sum of squares
 - statistics of fit, 3127
- correlation plots
 - ARIMA procedure, 197
- cospectrum estimate
 - cross-spectral analysis, 1751
 - SPECTRA procedure, 1751
- counting
 - time intervals, 97, 100
- counting time intervals
 - INTCK function, 100
- COUNTREG procedure
 - bounds on parameter estimates, 563
 - BY groups, 563
 - output table names, 585
 - restrictions on parameter estimates, 567
 - syntax, 559
- covariance estimates
 - GARCH model, 349
- Covariance of GMM estimators, 1094
- covariance of the parameter estimates, 1087
- covariance stationarity
 - VARMAX procedure, 2346
- covariates
 - heteroscedasticity models, 357, 1464
- CPORT procedure, 47
- CPU requirements
 - VARMAX procedure, 2365
- creating
 - time ID variable, 2881
- creating a Fame view, *see* SASEFAME engine
- creating a Haver view, *see* SASEHAVR engine
- creating from Model Viewer
 - HTML, 3056
- creating from Time Series Viewer
 - HTML, 3094
- criterion
 - automatic model selection, 3048
- cross sectional dimensions
 - represented by different series, 77
- cross sections
 - DATASOURCE procedure, 607, 609, 612, 622
- cross-correlation function
 - ARIMA procedure, 242
- cross-equation covariance matrix
 - MODEL procedure, 1105
 - seemingly unrelated regression, 1090
- cross-periodogram
 - cross-spectral analysis, 1741, 1751
 - SPECTRA procedure, 1751
- cross-reference
 - MODEL procedure, 1246
- cross-sectional dimensions, 77
 - combined with interleaved time series, 79
 - ID variables for, 77
 - represented with BY groups, 77
 - transposing time series, 117
- cross-sectional dimensions and
 - BY groups, 77
- cross-spectral analysis
 - coherency, 1751
 - cospectrum estimate, 1751
 - cross-periodogram, 1741, 1751
 - cross-spectrum, 1751
 - quadrature spectrum, 1751
 - SPECTRA procedure, 1740, 1741, 1751
- cross-spectrum
 - cross-spectral analysis, 1751
 - SPECTRA procedure, 1751
- crossproducts estimator of the covariance matrix, 1100
- crossproducts matrix, 1122
- crosstabulations, *see* FREQ procedure
- CRSP and SAS Dates
 - SASECRSP engine, 2595
- CRSP annual data

- DATASOURCE procedure, 650
- CRSP calendar/indices files
 - DATASOURCE procedure, 646
- CRSP daily binary files
 - DATASOURCE procedure, 645
- CRSP daily character files
 - DATASOURCE procedure, 645
- CRSP daily IBM binary files
 - DATASOURCE procedure, 645
- CRSP daily security files
 - DATASOURCE procedure, 647
- CRSP data files, *see* DATASOURCE procedure
- CRSP Date Formats
 - SASECRSP engine, 2596
- CRSP Date Functions
 - SASECRSP engine, 2595
- CRSP Date Informat
 - SASECRSP engine, 2597
- CRSP Integer Date Format
 - SASECRSP engine, 2596
- CRSP monthly binary files
 - DATASOURCE procedure, 645
- CRSP monthly character files
 - DATASOURCE procedure, 645
- CRSP monthly IBM binary files
 - DATASOURCE procedure, 645
- CRSP monthly security files
 - DATASOURCE procedure, 648
- CRSP stock files
 - DATASOURCE procedure, 645
- CRSPAccess Database
 - DATASOURCE procedure, 645
- CRSPDB_SASCAL environment variable
 - SASECRSP engine, 2582
- CRSPDCI Date Functions
 - SASECRSP engine, 2598
- CRSPDCS Date Functions
 - SASECRSP engine, 2598
- CRSPDI2S Date Function
 - SASECRSP engine, 2598
- CRSPDIC Date Functions
 - SASECRSP engine, 2598
- CRSPDS2I Date Function
 - SASECRSP engine, 2598
- CRSPDSC Date Functions
 - SASECRSP engine, 2598
- CRSPDT Date Formats
 - SASECRSP engine, 2596
- cubic
 - trend curves, 3122
- cubic trend, 3122
- cumulative statistics operators, 819
- Currency Conversion, 3194
- custom model specification, 3009

- custom models
 - forecasting models, 2914
 - specifying, 2914
- CUSUM statistics, 361, 378

D

- Da Silva method
 - PANEL procedure, 1378
- damped-trend exponential smoothing, 3113
 - smoothing models, 3113
- data frequency, *see* time intervals
- data periodicity
 - FORECAST procedure, 868
- data requirements
 - ARIMA procedure, 224
 - FORECAST procedure, 879
 - X11 procedure, 2430
- data set, 2847
 - concatenated, 2852
 - forecast data set, 2848
 - forms of, 2848
 - interleaved, 2850
 - simple, 2849
- data set selection, 2833, 3012
- DATA step, 46
 - SAS data sets, 46
- DATASETS procedure, 47
- DATASOURCE procedure
 - attributes, 600
 - attributes of variables, 624
 - auxiliary data sets, 600
 - balance of payment statistics data files, 600
 - BEA data files, 600
 - BEA national income and product accounts PC Format, 636
 - BEA S-pages, 600
 - BLS consumer price index surveys, 636
 - BLS data files, 600
 - BLS national employment, hours, and earnings survey, 637
 - BLS producer price index survey, 637
 - BLS state and area employment, hours, and earnings survey, 638
 - BOPS data file, 654
 - Bureau of Economic Analysis data files, 600
 - Bureau of Labor Statistics data files, 600
 - Center for Research in Security Prices data files, 600
 - CITIBASE format, 603
 - CITIBASE old format, 640
 - CITIBASE PC format, 640
 - COMPUSTAT data files, 600, 641

- COMPUSTAT IBM 360/370 general format 48
 - quarter files, 642
- COMPUSTAT IBM 360/370 general format
 - annual files, 641
- COMPUSTAT universal character format 48
 - quarter files, 644
- COMPUSTAT universal character format annual
 - files, 643
- Consumer Price Index Surveys, 600
- cross sections, 607, 609, 612, 622
- CRSP annual data, 650
- CRSP calendar/indices files, 646
- CRSP daily binary files, 645
- CRSP daily character files, 645
- CRSP daily IBM binary files, 645
- CRSP daily security files, 647
- CRSP data files, 600
- CRSP monthly binary files, 645
- CRSP monthly character files, 645
- CRSP monthly IBM binary files, 645
- CRSP monthly security files, 648
- CRSP stock files, 645
- CRSPAccess Database, 645
- direction of trade statistics data files, 600
- DOTS data file, 653
- DRI Data Delivery Service data files, 600
- DRI data files, 600, 639
- DRI/McGraw-Hill data files, 600, 639
- DRIBASIC data files, 639
- DRIBASIC economics format, 603
- DRIDDS data files, 640
- employment, hours, and earnings survey, 600
- event variables, 621, 627
- FAME data files, 600
- FAME Information Services Databases, 600, 650
- formatting variables, 624
- frequency of data, 603
- frequency of input data, 618
- generic variables, 629
- GFS data files, 654
- Global Insight data files, 600, 639
- Global Insight DRI data files, 639
- government finance statistics data files, 600
- Haver Analytics data files, 652
- ID variable, 627
- IMF balance of payment statistics, 654
- IMF data files, 600
- IMF direction of trade statistics, 653
- IMF Economic Information System data files, 653
- IMF government finance statistics, 654
- IMF International Financial Statistics, 607
- IMF international financial statistics, 653
- indexing the OUT= data set, 617, 683
- input file, 617, 618
- international financial statistics data files, 600
- International Monetary Fund data files, 600, 653
- labeling variables, 625
- lengths of variables, 614, 625
- main economic indicators (OECD) data files, 600
- national accounts data files (OECD), 600
- national income and product accounts, 600, 635
- NIPA Tables, 636
- obtaining descriptive information, 605, 609–611, 628–631
- OECD ANA data files, 655
- OECD annual national accounts, 655
- OECD data files, 600
- OECD main economic indicators, 657
- OECD MEI data files, 657
- OECD QNA data files, 656
- OECD quarterly national accounts, 656
- Organization for Economic Cooperation and
 - Development data files, 600, 655
- OUTALL= data set, 610
- OUTBY= data set, 609
- OUTCONT= data set, 605, 611
- output data sets, 603, 627–631
- Producer Price Index Survey, 600
- reading data files, 603
- renaming variables, 612, 625
- SAS YEARCUTOFF= option, 623
- state and area employment, hours, and earnings
 - survey, 600
- stock data files, 600
- subsetting data files, 603, 615
- time range, 622
- time range of data, 607
- time series variables, 604, 627
- type of input data file, 617
- U.S. Bureau of Economic Analysis data files, 635
- U.S. Bureau of Labor Statistics data files, 636
- variable list, 626
- DATE
 - ID variables, 69
- date values, 2831
 - calendar functions and, 94
 - computing datetime values from, 95
 - computing from datetime values, 95
 - difference between dates, 99
 - formats, 68, 140
 - formats for, 68
 - functions, 145
 - incrementing by intervals, 97
 - informat, 67, 138
 - informat for, 67
 - INTNX function and, 97

- normalizing to intervals, 99
- SAS representation for, 66
- syntax for, 66
- time intervals, 126
- time intervals and, 98
- DATE variable, 69
- dates
 - alignment of, 3021
- DATETIME
 - ID variables, 69
- datetime values
 - computing calendar variables from, 96
 - computing from calendar variables, 95
 - computing from time variables, 95
 - computing time variables from, 96
 - formats, 68, 144
 - formats for, 68
 - functions, 145
 - informats, 67, 138
 - informats for, 67
 - SAS representation for, 67
 - syntax for, 67
 - time intervals, 126
- DATETIME variable, 69
- dating variables, 2889
- decomposition of prediction error covariance
 - VARMAX procedure, 2261, 2297
- default time ranges, 3014
- defined
 - INTCK function, 97
 - interleaved time series, 78
 - INTNX function, 96
 - omitted observations, 76
 - time values, 67
- definition
 - S matrix, 1087
 - time series, 2822
- degrees of freedom correction, 1105
- denominator factors
 - transfer function model, 221
- dependence measures, 524
- dependency list
 - MODEL procedure, 1251
- Depreciation, 3157
- derivatives
 - MODEL procedure, 1234
- DETR. variable, 1146
- descriptive statistics, *see* UNIVARIATE procedure
- design matrix
 - ARIMAX models and, 220
- details
 - generalized method of moments, 1091
- developing
 - forecasting models, 2859, 3015
 - developing forecasting models, 2859, 3015
- DFPVALUE macro
 - Dickey-Fuller test, 157
 - SAS macros, 157
- DFTEST macro
 - Dickey-Fuller test, 158
 - output data sets, 159
 - SAS macros, 158
 - seasonality, testing for, 158
 - stationarity, testing for, 158
- diagnostic tests, 2895, 3125
 - time series, 2895
- diagnostics and debugging
 - MODEL procedure, 1245
- Dickey-Fuller test, 3126
 - DFPVALUE macro, 157
 - DFTEST macro, 158
 - PROBDF Function, 162
 - significance probabilities, 162
 - significance probabilities for, 157
 - unit root, 162
 - VARMAX procedure, 2266
- Dickey-Fuller tests, 233
- DIF function
 - alternatives to, 106
 - explained, 104
 - higher order differences, 107
 - introduced, 103
 - MODEL procedure version, 106
 - multiplier lags and, 107
 - percent change calculations and, 108, 109
 - pitfalls of, 105
 - second difference, 107
- DIF function and
 - differencing, 103–105
- difference between dates
 - date values, 99
- differences with X11ARIMA/88
 - X11 procedure, 2424
- Differencing, 3022
- differencing
 - ARIMA procedure, 213, 249, 256
 - DIF function and, 103–105
 - higher order, 107
 - MODEL procedure and, 106
 - multiplier differences, 107
 - percent change calculations and, 108, 109
 - RETAIN statement and, 106
 - second difference, 107
 - STATSPACE procedure, 1849
 - testing order of, 158
 - time series data, 103–109
 - VARMAX procedure, 2257
- different forms of

- output data sets, 80
- differential algebraic equations
 - ordinary differential equations (ODEs), 1225
- differential equations
 - See ordinary differential equations, 1148
- direction of trade statistics data files, *see*
 - DATASOURCE procedure
- discrete variables, *see* classification variables, *see*
 - classification variables
- discussed
 - EXPAND procedure, 120
- distributed lag regression models
 - PDLREG procedure, 1423
- distribution
 - of time series, 796
- distribution of
 - time series data, 796
- distribution of time series
 - EXPAND procedure, 796
- DOT as a GLUE character
 - SASEFAME engine, 2724
- DOTS data file
 - DATASOURCE procedure, 653
- double exponential smoothing, *see* exponential
 - smoothing, 3111
 - Brown smoothing model, 3111
 - smoothing models, 3111
- DRI Data Delivery Service data files, *see*
 - DATASOURCE procedure
- DRI data files, *see* DATASOURCE procedure
 - DATASOURCE procedure, 639
- DRI data files in FAME.db, *see* SASEFAME engine
- DRI/McGraw-Hill data files, *see* DATASOURCE
 - procedure
 - DATASOURCE procedure, 639
- DRI/McGraw-Hill data files in FAME.db, *see*
 - SASEFAME engine
- DRIBASIC data files
 - DATASOURCE procedure, 639
- DRIBASIC economics format
 - DATASOURCE procedure, 603
- DRIDDS data files
 - DATASOURCE procedure, 640
- DROP in the DATA step
 - SASEFAME engine, 2734
- dual quasi-Newton method
 - AUTOREG procedure, 376
- Durbin h test
 - AUTOREG procedure, 327
- Durbin t test
 - AUTOREG procedure, 327
- Durbin-Watson
 - MODEL procedure, 1104
- Durbin-Watson test

- autocorrelation tests, 349
- AUTOREG procedure, 325
 - for first-order autocorrelation, 325
 - for higher-order autocorrelation, 325
 - p-values for, 325
- Durbin-Watson tests, 349
 - linearized form, 357
- dynamic models
 - SIMLIN procedure, 1710, 1711, 1717, 1732
- dynamic multipliers
 - SIMLIN procedure, 1717, 1718
- dynamic regression, 194, 216, 3023, 3025
 - specifying, 2964
- dynamic regressors
 - forecasting models, 2964
- dynamic simulation, 1146
 - MODEL procedure, 1146, 1194
 - SIMLIN procedure, 1711
- dynamic simultaneous equation models
 - VARMAX procedure, 2280

E

- econometrics
 - features in SAS/ETS software, 21
- editing selection list
 - forecasting models, 2921
- EGARCH model
 - AUTOREG procedure, 338
- EGLS method
 - AUTOREG procedure, 369
- embedded in time series
 - missing values, 76
- embedded missing values, 76
- embedded missing values in
 - time series data, 76
- Empirical Distribution Estimation
 - MODEL procedure, 1102
- employment, hours, and earnings survey, *see*
 - DATASOURCE procedure
- ending dates of
 - time intervals, 99
- endogenous variables
 - SYSLIN procedure, 1878
- endpoint restrictions for
 - polynomial distributed lags, 1424, 1430
- Engle's Lagrange Multiplier test, 398
- Engle's Lagrange Multiplier test for
 - Heteroscedasticity, 398
- Enterprise Guide, 56
- Enterprise Miner—Time Series nodes, 57
- ENTROPY procedure
 - input data sets, 736
 - missing values, 735

- ODS graph names, 739
- output data sets, 737
- output table names, 738
- Environment variable, CRSPDB_SASCAL
 - SASECRSP engine, 2582
- EQ. variables, 1137, 1232
- equality restriction
 - linear models, 721
 - nonlinear models, 1079, 1154
- equation translations
 - MODEL procedure, 1232
- equation variables
 - MODEL procedure, 1229
- Error model options, 3026
- error sum of squares
 - statistics of fit, 3127
- ERROR. variables, 1232
- errors across equations
 - contemporaneous correlation of, 1911
- ESACF (Extended Sample Autocorrelation Function method), 243
- ESM procedure
 - BY groups, 761
 - ODS graph names, 777
- EST= data set
 - SIMLIN procedure, 1719
- ESTIMATE statement, 1061
- estimation convergence problems
 - MODEL procedure, 1116
- estimation methods
 - AUTOREG procedure, 365
 - MODEL procedure, 1086
- estimation of ordinary differential equations, 1148
 - MODEL procedure, 1148
- evaluation range, 3086
- event variables
 - DATASOURCE procedure, 621, 627
- Exact Maximum Likelihood Estimation, 535
- example
 - Cauchy distribution estimation, 1295
 - generalized method of moments, 1132, 1183, 1185, 1186, 1188
 - Goldfeld Quandt Switching Regression Model, 1297
 - Mixture of Distributions, 1301
 - Multivariate Mixture of Distributions, 1301
 - ordinary differential equations (ODEs), 1290
 - The D-method, 1297
- example of Bayesian VAR modeling
 - VARMAX procedure, 2230
- example of Bayesian VECM modeling
 - VARMAX procedure, 2237
- example of causality testing
 - VARMAX procedure, 2245
- example of cointegration testing
 - VARMAX procedure, 2233
- example of multivariate GARCH modeling
 - VARMAX procedure, 2347
- example of restricted parameter estimation and testing
 - VARMAX procedure, 2242
- example of VAR modeling
 - VARMAX procedure, 2223
- example of VARMA modeling
 - VARMAX procedure, 2316
- example of vector autoregressive modeling with exogenous variables
 - VARMAX procedure, 2238
- example of vector error correction modeling
 - VARMAX procedure, 2232
- example, COUNTREG, 585
- example, TCOUNTREG, 1981
- examples
 - Cauchy distribution estimation, 1295
 - Monte Carlo simulation, 1294
 - Simulating from a Mixture of Distributions, 1301
 - Switching Regression example, 1297
 - systems of differential equations, 1290
- examples of
 - time intervals, 132
- exogenous variables
 - SYSLIN procedure, 1878
- EXPAND procedure
 - AGGREGATE method, 812
 - aggregation of time series, 793, 796
 - BY groups, 803
 - changing periodicity, 121
 - conversion methods, 811
 - discussed, 120
 - distribution of time series, 796
 - extrapolation, 808
 - frequency, 793
 - ID variables, 805, 807
 - interpolation methods, 811
 - interpolation of missing values, 121
 - JOIN method, 812
 - ODS graph names, 830
 - output data sets, 828
 - range of output observations, 808
 - SPLINE method, 811
 - STEP method, 812
 - time intervals, 807
 - transformation of time series, 798, 813
 - transformation operations, 813
- EXPAND procedure and
 - interpolation, 120
 - time intervals, 121
- experimental design, 54
- explained

- DIF function, 104
- LAG function, 104
- explosive differential equations, 1224
 - ordinary differential equations (ODEs), 1224
- exponential
 - trend curves, 3123
- exponential smoothing, *see* smoothing models
 - double exponential smoothing, 870
 - FORECAST procedure, 846, 870
 - single exponential smoothing, 870
 - triple exponential smoothing, 870
- exponential trend, 3123
- Extended Sample Autocorrelation Function (ESACF)
 - method, 243
- external
 - forecasts, 3104
- external forecasts, 3104
- external sources
 - forecasting models, 2927, 3027
- extrapolation
 - EXPAND procedure, 808

F

- Factored ARIMA, 2995, 3022, 3060
- Factored ARIMA model specification, 3028
- Factored ARIMA models
 - forecasting models, 2911
 - specifying, 2911
- factored model
 - ARIMA model, 215
 - ARIMA procedure, 215
 - AUTOREG procedure, 330
- FAME data files, *see* DATASOURCE procedure
- Fame data files, *see* SASEFAME engine
- Fame glue symbol named DOT
 - SASEFAME engine, 2730
- FAME Information Services Databases, *see*
 - DATASOURCE procedure
 - DATASOURCE procedure, 650
- Fame Information Services Databases, *see*
 - SASEFAME engine
- fast Fourier transform
 - SPECTRA procedure, 1746
- fatal error when reading from a Fame data base
 - SASEFAME engine, 2719
- FCMP procedure, 47
 - SAS functions, 47
- features in SAS/ETS software
 - econometrics, 21
- FIML estimation method, *see* full information
 - maximum likelihood
- Financial Functions
 - PROBDF Function, 162
- financial functions, 48
- finishing the Fame CHLI
 - SASEFAME engine, 2719
- finite Fourier transform
 - SPECTRA procedure, 1740
- finite memory forecasts
 - ARIMA procedure, 260
- first-stage R squares, 1165
- fitting
 - forecasting models, 2862
- fitting forecasting models, 2862
- fixed effects model
 - one-way, 1359
 - two-way, 1361
- fixed rate mortgage, *see* LOAN procedure
- LOAN procedure, 902
- flows
 - contrasted with stock variables, 796
- for first-order autocorrelation
 - Durbin-Watson test, 325
- for higher-order autocorrelation
 - Durbin-Watson test, 325
- for interleaved time series
 - ID variables, 78
- for multiple selections
 - control key, 2840
- for nonlinear models
 - instrumental variables, 1162
- for selection of state space models
 - canonical correlation analysis, 1831, 1854
- for time series data
 - ID variables, 65
- forecast combination, 3029, 3104
- FORECAST command, 2986
- forecast data set, *see* output data set
- forecast horizon, 3014, 3086
- forecast options, 3033
- FORECAST procedure
 - ADDWINTERS method, 875
 - automatic forecasting, 846
 - autoregressive models, 869
 - BY groups, 867
 - confidence limits, 880
 - data periodicity, 868
 - data requirements, 879
 - exponential smoothing, 846, 870
 - forecasting, 846
 - Holt two-parameter exponential smoothing, 846, 875
 - ID variables, 868
 - missing values, 868
 - output data sets, 879, 880
 - predicted values, 880
 - residuals, 880

- seasonal forecasting, 872, 875
- seasonality, 877
- smoothing weights, 876
- STEPAR method, 869
- stepwise autoregression, 846, 869
- time intervals, 868
- time series methods, 859
- time trend models, 857
- Winters method, 846, 872
- FORECAST procedure and
 - interleaved time series, 78, 79
- Forecast Studio, 49
- forecasting, 3103
 - ARIMA procedure, 259, 261
 - FORECAST procedure, 846
 - MODEL procedure, 1197
 - STATSPACE procedure, 1830, 1859
 - VARMAX procedure, 2294
- Forecasting menusystem, 43
- forecasting models
 - adjustments, 2963
 - ARIMA models, 2907
 - automatic generation, 2838
 - automatic selection, 2901
 - changes in trend, 2971
 - combination models, 2924
 - comparing, 2947, 3043
 - custom models, 2914
 - developing, 2859, 3015
 - dynamic regressors, 2964
 - editing selection list, 2921
 - external sources, 2927, 3027
 - Factored ARIMA models, 2911
 - fitting, 2862
 - interventions, 2968
 - level shifts, 2973
 - linear trend, 2955
 - predictor variables, 2953
 - reference, 2949
 - regressors, 2961
 - seasonal dummy variables, 2980
 - selecting from a list, 2899
 - smoothing models, 2904, 3107
 - sorting, 2946, 3020
 - specifying, 2895
 - transfer functions, 3120
 - trend curves, 2957
- forecasting of Bayesian vector autoregressive models
 - VARMAX procedure, 2312
- forecasting process, 2831
- forecasting project, 2852
 - managing, 3037
 - Project Management window, 2853
 - saving and restoring, 2854
- sharing, 2858
- forecasts, 2879
 - confidence limits, 2878
 - external, 3104
 - plotting, 2878
 - producing, 2846, 3061
- form of
 - state space models, 1830
- formats
 - date values, 68, 140
 - datetime values, 68, 144
 - recommended for time series ID, 69
 - time values, 144
- formats for
 - date values, 68
 - datetime values, 68
- formatting variables
 - DATASOURCE procedure, 624
- forms of
 - data set, 2848
- Fourier coefficients
 - SPECTRA procedure, 1751
- Fourier transform
 - SPECTRA procedure, 1740
- fractional operators, 823
- Frank copula, 529
- FREQ procedure, 47
 - crosstabulations, 47
- frequency
 - changing by interpolation, 121, 793, 805
 - EXPAND procedure, 793
 - of time series observations, 81, 121
 - SPECTRA procedure, 1750
 - time intervals and, 81, 121
- frequency of data, *see* time intervals
 - DATASOURCE procedure, 603
- frequency of input data
 - DATASOURCE procedure, 618
- frequency option
 - SASEHAVR engine, 2770
- from interleaved form
 - transposing time series, 116
- from standard form
 - transposing time series, 119
- full information maximum likelihood
 - FIML estimation method, 1876
 - MODEL procedure, 1099
 - SYSLIN procedure, 1886, 1911
- Fuller Battese
 - variance components, 1368
- Fuller's modification to LIML
 - SYSLIN procedure, 1916
- functions, 48
 - date values, 145

- datetime values, 145
- lag functions, 1236
- mathematical functions, 1235
- random-number functions, 1236
- time intervals, 145
- time values, 145
- functions across time
 - MODEL procedure, 1236
- functions for
 - calendar calculations, 93, 145
 - time intervals, 96, 145
- functions of parameters
 - nonlinear models, 1061

G

- G4 inverse, 1065
- GARCH in mean model, *see* GARCH-M model
- GARCH model
 - AUTOREG procedure, 315
 - conditional t distribution, 375
 - covariance estimates, 349
 - generalized autoregressive conditional heteroscedasticity, 315
 - heteroscedasticity models, 357
 - initial values, 356
 - starting values, 346
 - t distribution, 375
- GARCH-M model, 375
 - AUTOREG procedure, 338
 - GARCH in mean model, 375
- Gauss-Marquardt method
 - ARIMA procedure, 252
 - AUTOREG procedure, 368
- Gauss-Newton method, 1106
- Gaussian distribution
 - MODEL procedure, 1060
- General Form Equations
 - Jacobi method, 1219
 - Seidel method, 1219
- generalized autoregressive conditional heteroscedasticity, *see* GARCH model
- generalized Durbin-Watson tests
 - AUTOREG procedure, 325
- generalized least squares
 - PANEL procedure, 1376
- generalized least squares estimator of the covariance matrix, 1100
- generalized least-squares
 - Yule-Walker method as, 369
- Generalized Method of Moments
 - V matrix, 1091, 1096
- generalized method of moments
 - details, 1091

- example, 1132, 1183, 1185, 1186, 1188
- generating models, 3001
- Generic Cashflow, 3164
- generic variables
 - DATASOURCE procedure, 629
- GFS data files
 - DATASOURCE procedure, 654
- giving dates to
 - time series data, 65
- Global Insight data files
 - DATASOURCE procedure, 639
- Global Insight DRI data files, *see* DATASOURCE procedure
 - DATASOURCE procedure, 639
- global statements, 48
- GLUE symbol
 - SASEFAME engine, 2724
- GMM
 - simulated method of moments, 1095
 - SMM, 1095
- GMM in Panel: Arellano and Bond's Estimator
 - Panel GMM, 1380
- goal seeking
 - MODEL procedure, 1215
- goal seeking problems, 1152
- Godfrey Lagrange test
 - autocorrelation tests, 1136
- Godfrey's test, 349
 - autocorrelation tests, 349
- Goldfeld Quandt Switching Regression Model
 - example, 1297
- goodness of fit, *see* statistics of fit
- goodness-of-fit statistics, *see* statistics of fit, 3080, *see* statistics of fit
- government finance statistics data files, *see* DATASOURCE procedure
- gradient of the objective function, 1121, 1122
- Granger causality test
 - VARMAX procedure, 2308
- graphics
 - SAS/GRAPH software, 50
- graphs, *see* Model Viewer, *see* Time Series Viewer
- grid search
 - MODEL procedure, 1115
- Gumbel copula, 529

H

- Hannan-Quinn information criterion
 - AUTOREG procedure, 379
- Hausman specification test, 1157
 - MODEL procedure, 1157
- Haver Analytics data files
 - DATASOURCE procedure, 652

Haver data files, *see* SASEHAVR engine
 Haver Information Services Databases, *see*
 SASEHAVR engine
 HCCME 2SLS, 1135
 HCCME 3SLS, 1135
 HCCME =
 hccme=0, 1389
 PANEL procedure, 1389
 HCCME OLS, 1133
 HCCME SUR, 1135
 hccme=0
 HCCME =, 1389
 help system, 20
 Henze-Zirkler test, 1127
 normality tests, 1127
 heteroscedastic errors, 1091
 heteroscedastic extreme value model
 MDC procedure, 955, 982
 Heteroscedasticity
 Engle's Lagrange Multiplier test for, 398
 Lee and King's test for, 399
 Portmanteau Q test for, 398
 Wong and Li's test for, 399
 heteroscedasticity, 1027, 1129
 AUTOREG procedure, 330
 Lagrange multiplier test, 359
 testing for, 330
 Heteroscedasticity Corrected Covariance Matrices,
 1389
 heteroscedasticity models, *see* GARCH model
 constrained estimation, 358
 covariates, 357, 1464
 link function, 358
 heteroscedasticity tests
 Breusch-Pagan test, 1129
 Lagrange multiplier test, 359
 White's test, 1129
 Heteroscedasticity-Consistent Covariance Matrix
 Estimation, 1133
 higher order
 differencing, 107
 higher order differences
 DIF function, 107
 higher order sums
 summation, 112
 Hildreth-Lu
 AR initial conditions, 1169
 Hildreth-Lu method
 AUTOREG procedure, 370
 histograms, *see* CHART procedure
 hold-out sample, 3014
 hold-out samples, 2949
 Holt smoothing model, *see* linear exponential
 smoothing

Holt two-parameter exponential smoothing
 FORECAST procedure, 846, 875
 Holt-Winters Method, *see* Winters Method
 Holt-Winters method, *see* Winters method
 homoscedastic errors, 1129
 HTML
 creating from Model Viewer, 3056
 creating from Time Series Viewer, 3094
 hyperbolic
 trend curves, 3123
 hyperbolic trend, 3123

I

ID groups
 MDC procedure, 966
 ID values for
 time intervals, 98
 ID variable, *see* time ID variable
 DATASOURCE procedure, 627
 ID variable for
 time series data, 65
 ID variables, 2837
 ARIMA procedure, 261
 DATE, 69
 DATETIME, 69
 EXPAND procedure, 805, 807
 for interleaved time series, 78
 for time series data, 65
 FORECAST procedure, 868
 PANEL procedure, 1349
 SIMLIN procedure, 1715
 sorting by, 70
 STATESPACE procedure, 1848
 TSCSREG procedure, 2099
 X11 procedure, 2412, 2414
 X12 procedure, 2494
 ID variables for
 cross-sectional dimensions, 77
 interleaved time series, 78
 time series cross-sectional form, 77
 IGARCH model
 AUTOREG procedure, 338
 IMF balance of payment statistics
 DATASOURCE procedure, 654
 IMF data files, *see* DATASOURCE procedure
 IMF direction of trade statistics
 DATASOURCE procedure, 653
 IMF Economic Information System data files
 DATASOURCE procedure, 653
 IMF government finance statistics
 DATASOURCE procedure, 654
 IMF International Financial Statistics
 DATASOURCE procedure, 607

- IMF international financial statistics
 - DATASOURCE procedure, 653
- IML, *see* SAS/IML software
- IML Studio software, 52
- impact multipliers
 - SIMLIN procedure, 1717, 1722
- impulse function
 - intervention model and, 219
- impulse response function
 - VARMAX procedure, 2261, 2283
- impulse response matrix
 - of a state space model, 1861
- in SAS data sets
 - time series, 2822
- in standard form
 - output data sets, 81
- incrementing by intervals
 - date values, 97
- incrementing dates
 - INTNX function, 97
- incrementing dates by
 - time intervals, 96, 97
- Independence
 - BDS test for, 347, 391
 - Rank Version of von Neumann Ratio test for, 393
 - Rank version of von Neumann ratio test for, 355
 - Runs test for, 351, 392
 - Turning Point test for, 355, 392
- independent variables, *see* predictor variables
- indexing
 - OUT= data set, 627
- indexing the OUT= data set
 - DATASOURCE procedure, 617, 683
- inequality restriction
 - linear models, 721
 - nonlinear models, 1054, 1079, 1154
- infinite memory forecasts
 - ARIMA procedure, 259
- infinite order AR representation
 - VARMAX procedure, 2261
- infinite order MA representation
 - VARMAX procedure, 2261, 2283
- informats
 - date values, 67, 138
 - datetime values, 67, 138
 - time values, 138
- informats for
 - date values, 67
 - datetime values, 67
- initial values, 356, 971
 - GARCH model, 356
- initializations
 - smoothing models, 3108
- initializing lags
 - MODEL procedure, 1239
 - SIMLIN procedure, 1720
- innovation vector
 - of a state space model, 1831
- input block
 - COMPUTAB procedure, 484
- input data set, 2833, 3012
- input data sets
 - ENTROPY procedure, 736
 - MODEL procedure, 1182
- input file
 - DATASOURCE procedure, 617, 618
- input matrix
 - of a state space model, 1831
- input series
 - ARIMA procedure, 216
- INPUT variables
 - X12 procedure, 2495
- inputs, *see* predictor variables
- installment loans, *see* LOAN procedure
- instrumental regression, 1089
- instrumental variables, 1089
 - choice of, 1162
 - for nonlinear models, 1162
 - number to use, 1163
 - SYSLIN procedure, 1878
- instruments, 1087
- INTCK function
 - calendar calculations and, 102
 - counting time intervals, 100
 - defined, 97
- INTCK function and
 - time intervals, 97, 100
- interaction effects
 - ARIMA procedure, 220
- interest rates
 - LOAN procedure, 924
- interim multipliers
 - SIMLIN procedure, 1713, 1718, 1721, 1722
- interleaved
 - data set, 2850
- interleaved form
 - output data sets, 80
- interleaved form of
 - time series data set, 78
- interleaved time series
 - and _TYPE_ variable, 78, 79
 - combined with cross-sectional dimension, 79
 - defined, 78
 - FORECAST procedure and, 78, 79
 - ID variables for, 78
 - plots of, 88
- Internal Rate of Return, 3206
- internal rate of return

- LOAN procedure, 926
- internal variables
 - MODEL procedure, 1230
- international financial statistics data files, *see*
 - DATASOURCE procedure
- International Monetary Fund data files, *see*
 - DATASOURCE procedure
 - DATASOURCE procedure, 653
- interpolation
 - between levels and rates, 121
 - between stocks and flows, 121
 - EXPAND procedure and, 120
 - of missing values, 121, 795
 - time series data, 121
 - to higher frequency, 121
 - to lower frequency, 121
- interpolation methods
 - EXPAND procedure, 811
- interpolation of
 - missing values, 121
 - time series data, 120, 121, 795
- interpolation of missing values
 - EXPAND procedure, 121
- interpolation of time series
 - step function, 812
- interrupted time series analysis, *see* intervention model
- interrupted time series model, *see* intervention model
- interval functions, *see* time intervals, functions
- interval functions and
 - calendar calculations, 102
- INTERVAL= option and
 - time intervals, 82
- intervals, *see* time intervals, 2837
- intervention analysis, *see* intervention model
- intervention model
 - ARIMA procedure, 216, 219, 222, 299
 - interrupted time series analysis, 219
 - interrupted time series model, 216
 - intervention analysis, 219
- intervention model and
 - impulse function, 219
 - step function, 220
- intervention notation, 3124
- intervention specification, 3034, 3035
- interventions, 3123
 - automatic inclusion of, 3021
 - forecasting models, 2968
 - point, 3123
 - predictor variables, 3123
 - ramp, 3124
 - specifying, 2968
 - step, 3123
- INTNX function

- calendar calculations and, 102
- checking data periodicity, 101
- computing ceiling of intervals, 100
- computing ending date of intervals, 99
- computing midpoint date of intervals, 99
- computing widths of intervals, 99
- defined, 96
- incrementing dates, 97
- normalizing dates in intervals, 99
- INTNX function and
 - date values, 97
 - time intervals, 96
- introduced
 - DIF function, 103
 - LAG function, 103
 - percent change calculations, 107
 - time variables, 93
- inverse autocorrelation function
 - ARIMA procedure, 241
- invertibility
 - ARIMA procedure, 257
 - VARMAX procedure, 2313
- Investment Analysis System, 44
- Investment Portfolio, 3144
- invoking the system, 2826
- IRoR, 3206
- irregular component
 - X11 procedure, 2400, 2406
- iterated generalized method of moments, 1094
- iterated seemingly unrelated regression
 - SYSLIN procedure, 1911
- iterated three-stage least squares
 - SYSLIN procedure, 1911
- Iterative Outlier Detection
 - ARIMA procedure, 308

J

- Jacobi method
 - MODEL procedure, 1218
- Jacobi method with General Form Equations
 - MODEL procedure, 1219
- Jacobian, 1088, 1106
- Jarque-Bera test, 350
 - normality tests, 350
- JMP, 55
- JOIN method
 - EXPAND procedure, 812
- joint generalized least squares, *see* seemingly unrelated regression
- jointly dependent variables
 - SYSLIN procedure, 1878

K

- K-class estimation
 - SYSLIN procedure, 1910
- Kalman filter
 - AUTOREG procedure, 368
 - STATSPACE procedure, 1832
 - used for state space modeling, 1832
- KEEP in the DATA step
 - SASEFAME engine, 2734
- kernels, 1092, 1747
 - SPECTRA procedure, 1747
- Kolmogorov-Smirnov test, 1127
 - normality tests, 1127
- KPSS (Kwiatkowski, Phillips, Schmidt, Shin) test, 353
- KPSS test, 353, 389
 - unit roots, 389
- Kruskal-Wallis test, 2442
- L**
- labeling variables
 - DATASOURCE procedure, 625
- LAG function
 - alternatives to, 106
 - explained, 104
 - introduced, 103
 - MODEL procedure version, 106
 - multiperiod lags and, 107
 - percent change calculations and, 108, 109
 - pitfalls of, 105
- LAG function and
 - Lags, 104
 - lags, 103, 105
- lag functions
 - functions, 1236
 - MODEL procedure, 1236
- lag lengths
 - MODEL procedure, 1238
- lag logic
 - MODEL procedure, 1237
- lagged dependent variables
 - and tests for autocorrelation, 327
 - AUTOREG procedure, 327
- lagged endogenous variables
 - SYSLIN procedure, 1878
- lagging
 - time series data, 103–109
- Lagrange multiplier test
 - heteroscedasticity, 359
 - heteroscedasticity tests, 359
 - linear hypotheses, 723
 - nonlinear hypotheses, 992, 1085, 1156, 1486
- Lags
 - LAG function and, 104
- lags
 - LAG function and, 103, 105
 - MODEL procedure and, 106
 - multiperiod lagging, 107
 - percent change calculations and, 108, 109
 - RETAIN statement and, 106
 - SIMLIN procedure, 1720
- lambda, 1107
- language differences
 - MODEL procedure, 1240
- large problems
 - MODEL procedure, 1123, 1124
- leads
 - calculation of, 110
 - multiperiod, 110
 - time series data, 110
- Lee and King's test, 399
- Lee and King's test for
 - Heteroscedasticity, 399
- left-hand side expressions
 - nonlinear models, 1229
- lengths of variables
 - DATASOURCE procedure, 614, 625
- level shifts
 - forecasting models, 2973
 - specifying, 2973
- levels
 - contrasted with flows or rates, 796
- levels, of classification variable, 569, 1955
- LIBNAME *libref* SASEHAVR '*physical name*' on
 - Windows
 - SASEFAME engine, 2730
 - LIBNAME *libref* SASEHAVR '*physical name*' on
 - UNIX
 - SASEFAME engine, 2730
- LIBNAME interface engine for Fame database, *see*
 - SASEFAME engine
- LIBNAME interface engine for Haver database, *see*
 - SASEHAVR engine
- LIBNAME statement
 - SASECRSP engine, 2578
 - SASEFAME engine, 2718
 - SASEHAVR engine, 2770
 - SASEXCCM engine, 2677
- likelihood confidence intervals, 1160
 - MODEL procedure, 1160
- Likelihood ratio test
 - nonlinear hypotheses, 992
- likelihood ratio test
 - linear hypotheses, 723
 - nonlinear hypotheses, 1085, 1156
- limitations on
 - ordinary differential equations (ODEs), 1224
- limitations on ordinary differential equations

MODEL procedure, 1224
 Limited Dependent Variable Models
 QLIM procedure, 1474
 limited information maximum likelihood
 LIML estimation method, 1876
 SYSLIN procedure, 1910
 LIML estimation method, *see* limited information
 maximum likelihood
 linear
 trend curves, 3122
 linear dependencies
 MODEL procedure, 1119
 linear exponential smoothing, 3112
 Holt smoothing model, 3112
 smoothing models, 3112
 linear hypotheses
 Lagrange multiplier test, 723
 likelihood ratio test, 723
 Wald test, 723
 linear hypothesis testing, 1388
 PANEL procedure, 1388
 linear models
 equality restriction, 721
 inequality restriction, 721
 restricted estimation, 721
 linear structural equations
 SIMLIN procedure, 1717
 linear trend, 2955, 3122
 forecasting models, 2955
 linearized form
 Durbin-Watson tests, 357
 link function
 heteroscedasticity models, 358
 Listing the Haver selection keys, OUTSELECT=ON
 SASEHAVR engine, 2771
 Loan, 3149
 LOAN procedure
 adjustable rate mortgage, 901, 902
 amortization schedule, 930
 balloon payment mortgage, 901, 902
 break even analysis, 926
 buydown rate loans, 901, 902
 comparing loans, 909, 926, 930
 continuous compounding, 924
 fixed rate mortgage, 901, 902
 installment loans, 901
 interest rates, 924
 internal rate of return, 926
 loan repayment schedule, 930
 loan summary table, 929
 loans analysis, 901
 minimum attractive rate of return, 926
 mortgage loans, 901
 output data sets, 927, 928

 output table names, 930
 present worth of cost, 926
 rate adjustment cases, 920
 taxes, 926
 true interest rate, 926
 types of loans, 902
 loan repayment schedule
 LOAN procedure, 930
 loan summary table
 LOAN procedure, 929
 loans analysis, *see* LOAN procedure
 log
 transformations, 3105
 log likelihood value, 350
 log test, 3126
 log transformation, *see* transformations
 log transformations
 ARIMA procedure, 260
 LOGTEST macro, 160
 logarithmic
 trend curves, 3122
 logarithmic trend, 3122
 logistic
 transformations, 3105
 trend curves, 3122
 logistic trend, 3122
 logit
 QLIM Procedure, 1450
 LOGTEST macro
 log transformations, 160
 output data sets, 160
 SAS macros, 160
 long-run relations testing
 VARMAX procedure, 2335

M

%MA and %AR macros combined, 1177
 MA Initial Conditions
 conditional least squares, 1169
 maximum likelihood, 1169
 unconditional least squares, 1169
 macro return codes
 MODEL procedure, 1245
 macros, *see* SAS macros
 MAE
 AUTOREG procedure, 377
 main economic indicators (OECD) data files, *see*
 DATASOURCE procedure
 main economic indicators (OECD) data files in
 FAME.db, *see* SASEFAME engine
 managing
 forecasting project, 3037
 managing forecasting projects, 3037

- MAPE
 - AUTOREG procedure, 377
- Mardia's test, 1127
 - normality tests, 1127
- Marquardt method
 - ARIMA procedure, 252
- Marquardt-Levenberg method, 1107
- MARR, *see* minimum attractive rate of return, 3227
- mathematical functions, 48
 - functions, 1235
- matrix language
 - SAS/IML software, 52
- maximizing likelihood functions, 54
- maximum likelihood
 - AR initial conditions, 1169
 - MA Initial Conditions, 1169
- maximum likelihood method
 - AUTOREG procedure, 370
- MDC procedure
 - binary data modeling example, 995
 - binary logit example, 995, 998
 - binary probit example, 995
 - bounds on parameter estimates, 965
 - BY groups, 966
 - conditional logit example, 998
 - conditional logit model, 944, 945, 980
 - goodness-of-fit measures, 990
 - Hausman's specification and likelihood ratio tests for nested logit, 995
 - heteroscedastic extreme value model, 955, 982
 - ID groups, 966
 - introductory examples, 945
 - mixed logit model, 960, 983
 - multinomial discrete choice, 979
 - multinomial probit example, 1001
 - multinomial probit model, 954, 985
 - nested logit example, 1008
 - nested logit model, 950, 986
 - output table names, 994
 - restrictions on parameter estimates, 976
 - syntax, 962
 - Tests on Parameters, 992
- mean absolute error
 - statistics of fit, 3127
- mean absolute percent error
 - statistics of fit, 2182, 3127
- mean percent error
 - statistics of fit, 3128
- mean prediction error
 - statistics of fit, 3128
- mean square error
 - statistics of fit, 2182
- mean squared error
 - statistics of fit, 3127
- MEANS procedure, 47
- measure
 - dependence, 524
- measurement equation
 - observation equation, 1831
 - of a state space model, 1831
- MELO estimation method, *see* minimum expected loss estimator
- memory requirements
 - MODEL procedure, 1124
 - VARMAX procedure, 2365
- menu interfaces
 - to SAS/ETS software, 43, 44
- merging series
 - time series data, 116
- merging time series data sets, 116
- Michaelis-Menten Equations, 1152
- midpoint dates of
 - time intervals, 99
- MINIC (Minimum Information Criterion) method, 245
- minimization methods
 - MODEL procedure, 1106
- minimization summary
 - MODEL procedure, 1109
- minimum attractive rate of return
 - LOAN procedure, 926
 - MARR, 926
- minimum expected loss estimator
 - MELO estimation method, 1910
 - SYSLIN procedure, 1910
- minimum information criteria method
 - VARMAX procedure, 2304
- Minimum Information Criterion (MINIC) method, 245
- missing observations
 - contrasted with omitted observations, 76
- missing values, 820, 1184
 - COMPUTAB procedure, 486
 - contrasted with omitted observations, 76
 - embedded in time series, 76
 - ENTROPY procedure, 735
 - FORECAST procedure, 868
 - interpolation of, 121
 - MODEL procedure, 1104, 1220
 - smoothing models, 3108
 - time series data, 795
 - time series data and, 75
 - VARMAX procedure, 2276
- missing values and
 - time series data, 75, 76
- MISSONLY operator, 820
- mixed logit model
 - MDC procedure, 960, 983

Mixture of Distributions

example, 1301

MLE, 535

MMAE, 3106

MMSE, 3106

model evaluation, 3100

Model Identification

ARIMA procedure, 301

model list, 2867, 3044

MODEL procedure

adjacency graph, 1255

adjusted R squared, 1106

Almon lag polynomials, 1179

analyzing models, 1250

ARMA model, 1165

autoregressive models, 1165

auxiliary equations, 1152

block structure, 1255

character variables, 1232

Chow tests, 1159

collinearity diagnostics, 1111, 1119

compiler listing, 1247

control variables, 1230

controlling starting values, 1112

convergence criteria, 1107

cross-equation covariance matrix, 1105

cross-reference, 1246

dependency list, 1251

derivatives, 1234

diagnostics and debugging, 1245

Durbin-Watson, 1104

dynamic simulation, 1146, 1194

Empirical Distribution Estimation, 1102

equation translations, 1232

equation variables, 1229

estimation convergence problems, 1116

estimation methods, 1086

estimation of ordinary differential equations,
1148

forecasting, 1197

full information maximum likelihood, 1099

functions across time, 1236

Gaussian distribution, 1060

goal seeking, 1215

grid search, 1115

Hausman specification test, 1157

initializing lags, 1239

input data sets, 1182

internal variables, 1230

Jacobi method, 1218

Jacobi method with General Form Equations,
1219

lag functions, 1236

lag lengths, 1238

lag logic, 1237

language differences, 1240

large problems, 1123, 1124

likelihood confidence intervals, 1160

limitations on ordinary differential equations,
1224

linear dependencies, 1119

macro return codes, 1245

memory requirements, 1124

minimization methods, 1106

minimization summary, 1109

missing values, 1104, 1220

model variables, 1229

Monte Carlo simulation, 1294

Moore-Penrose generalized inverse, 1065

moving average models, 1165

Multivariate t-Distribution Estimation, 1101

n-period-ahead forecasting, 1195

nested iterations, 1106

Newton's Method, 1218

nonadditive errors, 1137

normal distribution, 1060

ODS graph names, 1193

ordinary differential equations and goal seeking,
1152

output data sets, 1187

output table names, 1190

parameters, 1229

polynomial distributed lag models, 1179

program listing, 1246

program variables, 1231

properties of the estimates, 1104

quasi-random number generators, 1207

R squared, 1106, 1112

random-number generating functions, 1236

restrictions on parameters, 1175

S matrix, 1105

S-iterated methods, 1106

Seidel method, 1219

Seidel method with General Form Equations,
1219

SIMNLIN procedure, 1025

simulated nonlinear least squares, 1098

simulation, 1197

solution mode output, 1209

solution modes, 1194, 1217

SOLVE Data Sets, 1225

starting values, 1110, 1116

static simulation, 1146

static simulations, 1194

stochastic simulation, 1197

storing programs, 1243

summary statistics, 1212

SYSNLIN procedure, 1025

- systems of ordinary differential equations, 1290
 - tests on parameters, 1156
 - time variable, 1152
 - troubleshooting estimation convergence problems, 1109
 - troubleshooting simulation problems, 1220
 - using models to forecast, 1197
 - using solution modes, 1194
 - variables in model program, 1228
 - _WEIGHT_ variable, 1130
 - MODEL procedure and
 - differencing, 106
 - lags, 106
 - MODEL procedure version
 - DIF function, 106
 - LAG function, 106
 - model selection, 3059
 - model selection criterion, 2944, 3048
 - model selection for X-11-ARIMA method
 - X11 procedure, 2434
 - model selection list, 3049
 - model variables
 - MODEL procedure, 1229
 - Model Viewer, 2869, 3053
 - graphs, 2861
 - plots, 2861
 - saving graphs and tables, 3066, 3068
 - Monte Carlo simulation, 1197, 1294
 - examples, 1294
 - MODEL procedure, 1294
 - Moore-Penrose generalized inverse, 1065
 - mortgage loans, *see* LOAN procedure
 - moving average function, 1236
 - moving average models, 1166
 - MODEL procedure, 1165
 - moving averages
 - percent change calculations, 109
 - moving between computer systems
 - SAS data sets, 47
 - moving product and geometric mean operators, 824
 - moving rank operator, 823
 - moving seasonality test, 2442
 - moving t-value operators, 827
 - moving time window operators, 817
 - moving-average parameters
 - ARIMA procedure, 258
 - multinomial discrete choice
 - independence from irrelevant alternatives, 981
 - MDC procedure, 979
 - multinomial probit model
 - MDC procedure, 954, 985
 - multiperiod
 - leads, 110
 - multiperiod differences
 - differencing, 107
 - multiperiod lagging
 - lags, 107
 - multiperiod lags and
 - DIF function, 107
 - LAG function, 107
 - summation, 111, 112
 - multiple selections, 2840
 - multiplicative model
 - ARIMA model, 215
 - multiplicative seasonal smoothing, 3115
 - smoothing models, 3115
 - multipliers
 - SIMLIN procedure, 1713, 1714, 1717, 1718, 1721, 1722
 - multipliers for higher order lags
 - SIMLIN procedure, 1718, 1732
 - multivariate
 - autocorrelations, 1835
 - normality tests, 1127
 - partial autocorrelations, 1854
 - multivariate forecasting
 - STATESPACE procedure, 1830
 - multivariate GARCH Modeling
 - VARMAX procedure, 2271
 - Multivariate Mixture of Distributions
 - example, 1301
 - multivariate model diagnostic checks
 - VARMAX procedure, 2320
 - Multivariate t-Distribution Estimation
 - MODEL procedure, 1101
 - multivariate time series
 - STATESPACE procedure, 1830
- ## N
- n-period-ahead forecasting
 - MODEL procedure, 1195
 - naming
 - time intervals, 82, 126
 - naming model parameters
 - ARIMA procedure, 258
 - national accounts data files (OECD), *see* DATASOURCE procedure
 - national accounts data files (OECD) in FAME.db, *see* SASEFAME engine
 - national income and product accounts, *see* DATASOURCE procedure
 - DATASOURCE procedure, 635
 - negative log likelihood function, 1099
 - negative log-likelihood function, 1101
 - Nerlove
 - variance components, 1370
 - nested iterations

- MODEL procedure, 1106
 - nested logit model
 - MDC procedure, 950, 986
 - Newton's Method
 - MODEL procedure, 1218
 - Newton-Raphson
 - optimization methods, 562, 971, 1947
 - Newton-Raphson method, 562, 971, 1947
 - NIPA Tables
 - DATASOURCE procedure, 636
 - NLO Overview
 - NLO system, 169
 - NLO system
 - NLO Overview, 169
 - Options, 169
 - output table names, 187
 - remote monitoring, 184
 - nominal variables, *see also* classification variables,
 - see also* classification variables
 - NOMISS operator, 820
 - nonadditive errors
 - MODEL procedure, 1137
 - nonlinear hypotheses
 - Lagrange multiplier test, 992, 1085, 1156, 1486
 - Likelihood ratio test, 992
 - likelihood ratio test, 1085, 1156
 - Wald test, 992, 1085, 1156, 1486
 - nonlinear least-squares
 - AUTOREG procedure, 370
 - nonlinear models
 - equality restriction, 1079, 1154
 - functions of parameters, 1061
 - inequality restriction, 1054, 1079, 1154
 - left-hand side expressions, 1229
 - restricted estimation, 1054, 1079, 1154
 - test of hypotheses, 1084
 - nonmissing observations
 - statistics of fit, 3126
 - nonseasonal ARIMA model
 - notation, 3118
 - nonseasonal transfer function
 - notation, 3120
 - nonstationarity, *see* stationarity
 - normal copula, 525
 - normal distribution
 - MODEL procedure, 1060
 - normality tests, 1127
 - Henze-Zirkler test, 1127
 - Jarque-Bera test, 350
 - Kolmogorov-Smirnov test, 1127
 - Mardia's test, 1127
 - multivariate, 1127
 - Shapiro-Wilk test, 1127
 - normalizing dates in intervals
 - INTNX function, 99
 - normalizing to intervals
 - date values, 99
 - notation
 - nonseasonal ARIMA model, 3118
 - nonseasonal transfer function, 3120
 - seasonal ARIMA model, 3119
 - seasonal transfer function, 3121
 - notation for
 - ARIMA model, 210
 - ARMA model, 210
 - number of observations
 - statistics of fit, 3126
 - number to use
 - instrumental variables, 1163
 - numerator factors
 - transfer function model, 221
- O**
- OBJECT convergence measure, 1107
 - objective function, 1087
 - observation equation, *see* measurement equation
 - observation numbers, 3081
 - as time ID, 2885
 - time ID variable, 2885
 - obtaining descriptive information
 - DATASOURCE procedure, 605, 609–611, 628–631
 - ODS graph names
 - ARIMA procedure, 277
 - AUTOREG procedure, 410
 - COPULA procedure, 539
 - ENTROPY procedure, 739
 - ESM procedure, 777
 - EXPAND procedure, 830
 - MODEL procedure, 1193
 - SEVERITY procedure, 1607
 - SIMILARITY procedure, 1682
 - SYSLIN procedure, 1922
 - TIMESERIES procedure, 2072
 - UCM procedure, 2176
 - VARMAX procedure, 2363
 - X12 procedure, 2523
 - ODS Graphics
 - ARIMA procedure, 227
 - UCM procedure, 2118
 - X12 procedure, 2479
 - OECD ANA data files
 - DATASOURCE procedure, 655
 - OECD annual national accounts
 - DATASOURCE procedure, 655
 - OECD data files, *see* DATASOURCE procedure

- OECD data files in FAME.db, *see* SASEFAME engine
- OECD main economic indicators
 - DATASOURCE procedure, 657
- OECD MEI data files
 - DATASOURCE procedure, 657
- OECD QNA data files
 - DATASOURCE procedure, 656
- OECD quarterly national accounts
 - DATASOURCE procedure, 656
- of a state space model
 - impulse response matrix, 1861
 - innovation vector, 1831
 - input matrix, 1831
 - measurement equation, 1831
 - state transition equation, 1830
 - state vector, 1830
 - transition equation, 1830
 - transition matrix, 1831
- of a time series
 - unit root, 158
- of interleaved time series
 - overlay plots, 88
- of missing values
 - interpolation, 121, 795
- of time series
 - distribution, 796
 - overlay plots, 86
 - sampling frequency, 69, 81, 121
 - simulation, 2999, 3090
 - stationarity, 213
 - summation, 111
 - time ranges, 75
- of time series data set
 - standard form, 74
 - time series cross-sectional form, 77
- of time series observations
 - frequency, 81, 121
 - periodicity, 69, 81, 121
- omitted observations
 - contrasted with missing values, 76
 - defined, 76
 - replacing with missing values, 101
- omitted observations in
 - time series data, 76
- one-way
 - fixed effects model, 1359
 - random effects model, 1367
- one-way fixed effects model
 - PANEL procedure, 1359
- one-way fixed-effects model, 1359
- one-way random effects model
 - PANEL procedure, 1367
- one-way random-effects model, 1367
- operations research
 - SAS/OR software, 53
- optimization methods
 - Newton-Raphson, 562, 971, 1947
 - quasi-Newton, 357, 562, 971, 1947
 - trust region, 357, 562, 971, 1947
- optimizations
 - smoothing weights, 3109
- Options
 - NLO system, 169
- options
 - automatic model selection, 3008
- order of calculations
 - COMPUTAB procedure, 480
- order statistics, *see* RANK procedure
- Ordinal Discrete Choice Modeling
 - QLIM procedure, 1471
- ordinary differential equations (ODEs)
 - and goal seeking, 1152
 - differential algebraic equations, 1225
 - example, 1290
 - explosive differential equations, 1224
 - limitations on, 1224
 - systems of, 1290
- ordinary differential equations and goal seeking
 - MODEL procedure, 1152
- Organization for Economic Cooperation and Development data files, *see* DATASOURCE procedure
 - DATASOURCE procedure, 655
- Organization for Economic Cooperation and Development data files in FAME.db, *see* SASEFAME engine
- orthogonal polynomials
 - PDLREG procedure, 1424
- OUT= data set
 - indexing, 627
- OUTALL= data set
 - DATASOURCE procedure, 610
- OUTBY= data set
 - DATASOURCE procedure, 609
- OUTCONT= data set
 - DATASOURCE procedure, 605, 611
- Outlier Detection
 - ARIMA procedure, 306
- Output Data Sets
 - VARMAX procedure, 2350
- output data sets
 - and the OUTPUT statement, 81
 - ARIMA procedure, 264–266, 268, 269
 - AUTOREG procedure, 405
 - BOXCOXAR macro, 155
 - COMPUTAB procedure, 486
 - DATASOURCE procedure, 603, 627–631

- DFTEST macro, 159
- different forms of, 80
- ENTROPY procedure, 737
- EXPAND procedure, 828
- FORECAST procedure, 879, 880
- in standard form, 81
- interleaved form, 80
- LOAN procedure, 927, 928
- LOGTEST macro, 160
- MODEL procedure, 1187
- PANEL procedure, 1396–1398
- PDLREG procedure, 1437
- produced by SAS/ETS procedures, 80
- SIMLIN procedure, 1720, 1721
- SPECTRA procedure, 1750
- STATESPACE procedure, 1862–1864
- SYSLIN procedure, 1917, 1919
- X11 procedure, 2437, 2438
- Output Delivery System (ODS), 3056, 3094
- OUTPUT statement
 - SAS/ETS procedures using, 81
- output table names
 - ARIMA procedure, 273
 - AUTOREG procedure, 407
 - COPULA procedure, 539
 - COUNTREG procedure, 585
 - ENTROPY procedure, 738
 - LOAN procedure, 930
 - MDC procedure, 994
 - MODEL procedure, 1190
 - NLO system, 187
 - PANEL procedure, 1399
 - PDLREG procedure, 1438
 - QLIM procedure, 1493
 - SIMLIN procedure, 1723
 - SPECTRA procedure, 1752
 - STATESPACE procedure, 1866
 - SYSLIN procedure, 1921
 - TCOUNTREG procedure, 1980
 - TSCSREG procedure, 2102
 - X11 procedure, 2451
- over identification restrictions
 - SYSLIN procedure, 1916
- overlay plot of
 - time series data, 86
- overlay plots
 - of interleaved time series, 88
 - of time series, 86
 - _TYPE_ variable and, 88
- P**
- p-values for
 - Durbin-Watson test, 325
- panel data
 - TSCSREG procedure, 2091
- Panel GMM, 1380
 - GMM in Panel: Arellano and Bond's Estimator, 1380
- PANEL procedure
 - Between Estimators, 1367
 - BY groups, 1348
 - Da Silva method, 1378
 - generalized least squares, 1376
 - HCCME =, 1389
 - ID variables, 1349
 - linear hypothesis testing, 1388
 - one-way fixed effects model, 1359
 - one-way random effects model, 1367
 - output data sets, 1396–1398
 - output table names, 1399
 - Parks method, 1376
 - Pooled Estimator, 1367
 - predicted values, 1356
 - printed output, 1398
 - R square measure, 1392
 - residuals, 1356
 - specification tests, 1393
 - two-way fixed effects model, 1361
 - two-way random effects model, 1370
 - Zellner's two-stage method, 1377
- parameter change vector, 1121
- parameter estimates, 2875
- parameter estimation, 3100
- parameters
 - MODEL procedure, 1229
 - UCM procedure, 2121–2132, 2134–2144
- Pareto charts, 54
- Parks method
 - PANEL procedure, 1376
- partial autocorrelations
 - multivariate, 1854
- partial autoregression coefficient
 - VARMAX procedure, 2263, 2300
- partial canonical correlation
 - VARMAX procedure, 2263, 2303
- partial correlation
 - VARMAX procedure, 2301
- PDL, *see* polynomial distributed lags
- PDLREG procedure
 - BY groups, 1430
 - confidence limits, 1434
 - distributed lag regression models, 1423
 - orthogonal polynomials, 1424
 - output data sets, 1437
 - output table names, 1438
 - polynomial distributed lags, 1424
 - predicted values, 1433

- residuals, 1433
- restricted estimation, 1434
- percent change calculations
 - at annual rates, 108
 - introduced, 107
 - moving averages, 109
 - period-to-period, 108
 - time series data, 108, 109
 - year-over-year, 108
 - yearly averages, 109
- percent change calculations and
 - DIF function, 108, 109
 - differencing, 108, 109
 - LAG function, 108, 109
 - lags, 108, 109
- percent operators, 827
- period of evaluation, 2948
- period of fit, 2948, 3014, 3086
- period-to-period
 - percent change calculations, 108
- Periodic Equivalent, *see* Uniform Periodic Equivalent
- periodicity
 - changing by interpolation, 121, 793
 - of time series observations, 69, 81, 121
- periodicity of
 - time series data, 81, 121
- periodicity of time series
 - time intervals, 81, 121
- periodogram
 - SPECTRA procedure, 1740, 1751
- PGARCH model, 374
 - AUTOREG procedure, 338
 - Power GARCH model, 374
- Phillips-Ouliaris test, 351, 386
- Phillips-Perron test, 351, 385
 - unit roots, 351–353, 385
- Phillips-Perron tests, 233
- Physical Names on Supported hosts
 - SASEFAME engine, 2730
- Physical path name syntax for variety of environments
 - SASEFAME engine, 2730
- pitfalls of
 - DIF function, 105
 - LAG function, 105
- plot axis and
 - time intervals, 85
- plot axis for time series
 - SGPLOT procedure, 85
- PLOT procedure, 47
 - plotting time series, 90
 - time series data, 90
- plot reference lines and
 - time intervals, 85
- plots, *see* Model Viewer, *see* Time Series Viewer
- plots of
 - interleaved time series, 88
- plotting
 - autocorrelations, 197
 - forecasts, 2878
 - prediction errors, 2871
 - residual, 89
 - time series data, 83
- plotting time series
 - PLOT procedure, 90
 - SGPLOT procedure, 84
 - Time Series Viewer procedure, 84
- point
 - interventions, 3123
- point interventions, 3123
- point-in-time values, 793, 796
- polynomial distributed lag models
 - MODEL procedure, 1179
- polynomial distributed lags
 - Almon lag polynomials, 1423
 - endpoint restrictions for, 1424, 1430
 - PDL, 1423
 - PDLREG procedure, 1424
- Polynomial specification, 2995, 3022, 3060
- pooled
 - pooled estimator, 1367
- Pooled Estimator
 - PANEL procedure, 1367
- pooled estimator, 1367
 - pooled, 1367
- Portfolio, *see* Investment Portfolio
- Portmanteau Q test, 398
- Portmanteau Q test for
 - Heteroscedasticity, 398
- power curve
 - trend curves, 3123
- power curve trend, 3123
- Power GARCH model, *see* PGARCH model
- PPC convergence measure, 1107
- Prais-Winsten estimates
 - AUTOREG procedure, 369
- PRED. variables, 1232
- predetermined variables
 - SYSLIN procedure, 1878
- predicted values
 - ARIMA procedure, 259
 - AUTOREG procedure, 361, 400, 401
 - conditional variance, 403
 - FORECAST procedure, 880
 - PANEL procedure, 1356
 - PDLREG procedure, 1433
 - SIMLIN procedure, 1711, 1716
 - STATSPACE procedure, 1859, 1862
 - structural, 361, 401, 1433

- SYSLIN procedure, 1902
- transformed models, 1139
- predicting
 - conditional variance, 403
- prediction error covariance
 - VARMAX procedure, 2260, 2294, 2296
- prediction errors
 - autocorrelations, 2872
 - plotting, 2871
 - residuals, 2940
 - stationarity, 2873
- predictions
 - smoothing models, 3108
- predictive Chow test, 350, 400
- predictive Chow tests, 1159
- predictor variables
 - forecasting models, 2953
 - independent variables, 2953
 - inputs, 2953
 - interventions, 3123
 - seasonal dummies, 3125
 - specifying, 2953
 - trend curves, 3122
- Present Value Analysis, *see* Time Value Analysis
- present worth of cost
 - LOAN procedure, 926
- prewhitening
 - ARIMA procedure, 249
- principal component, 1119
- PRINT procedure, 47
 - printing SAS data sets, 47
- printed output
 - ARIMA procedure, 270
 - AUTOREG procedure, 406
 - PANEL procedure, 1398
 - SIMLIN procedure, 1721
 - STATESPACE procedure, 1865
 - SYSLIN procedure, 1919
 - X11 procedure, 2440
- printing
 - SAS data sets, 47
- printing SAS data sets, *see* PRINT procedure
- probability functions, 49
- PROBDF Function
 - Dickey-Fuller test, 162
 - Financial Functions, 162
 - significance probabilities, 162
 - significance probabilities for Dickey-Fuller tests, 162
- PROBDF function
 - defined, 162
- probit
 - QLIM Procedure, 1450
- produced by SAS/ETS procedures

- output data sets, 80
- Producer Price Index Survey, *see* DATASOURCE
- procedure
- producing
 - forecasts, 2846, 3061
- producing forecasts, 3061
- program flow
 - COMPUTAB procedure, 477
- program listing
 - MODEL procedure, 1246
- program variables
 - MODEL procedure, 1231
- programming statements
 - COMPUTAB procedure, 474
- Project Management window
 - forecasting project, 2853
- properties of the estimates
 - MODEL procedure, 1104
- properties of time series, 2895
- PROTO procedure, 47
 - printing SAS data sets, 47

Q

- QGARCH model, 374
 - AUTOREG procedure, 338
 - Quadratic GARCH model, 374
- QLIM Procedure, 1450
 - logit, 1450
 - probit, 1450
 - selection, 1450
 - tobit, 1450
- QLIM procedure
 - Bivariate Limited Dependent Variable Modeling, 1482
 - Box-Cox Modeling, 1481
 - BY groups, 1461
 - Censored Regression Models, 1474
 - Frontier, 1478
 - Heteroscedasticity, 1480
 - Limited Dependent Variable Models, 1474
 - Multivariate Limited Dependent Models, 1485
 - Ordinal Discrete Choice Modeling, 1471
 - Output, 1486
 - output table names, 1493
 - Selection Models, 1483
 - syntax, 1456
 - Tests on Parameters, 1485
 - Truncated Regression Models, 1477
 - Types of Tobit Model, 1475
- quadratic
 - trend curves, 3122
- Quadratic GARCH model, *see* QGARCH model
- quadratic trend, 3122

quadrature spectrum
 cross-spectral analysis, 1751
 SPECTRA procedure, 1751
 qualitative variables, *see* classification variables, *see*
 classification variables
 quasi-Newton
 optimization methods, 357, 562, 971, 1947
 quasi-Newton method, 357, 562, 971, 1947
 AUTOREG procedure, 346
 quasi-random number generators
 MODEL procedure, 1207

R

R convergence measure, 1107
 R square measure
 PANEL procedure, 1392
 R square statistic
 statistics of fit, 2182
 R squared
 MODEL procedure, 1106, 1112
 R squared measure, 1392
 R-square statistic
 statistics of fit, 3127
 SYSLIN procedure, 1913
 ramp
 interventions, 3124
 ramp function, *see* ramp interventions
 ramp interventions, 3124
 ramp function, 3123
 Ramsey's test, *see* RESET test
 random effects model
 one-way, 1367
 two-way, 1370
 random number functions, 49
 random walk model
 AUTOREG procedure, 420
 random walk R-square
 statistics of fit, 2182, 3127
 random-number functions
 functions, 1236
 random-number generating functions
 MODEL procedure, 1236
 random-walk with drift tests, 233
 range of output observations
 EXPAND procedure, 808
 RANGE= option in the LIBNAME statement
 SASEFAME engine, 2737
 RANK procedure, 47
 order statistics, 47
 Rank Version of von Neumann Ratio test, 393
 Rank version of von Neumann ratio test, 355
 Rank Version of von Neumann Ratio test for
 Independence, 393

Rank version of von Neumann ratio test for
 Independence, 355
 rate adjustment cases
 LOAN procedure, 920
 rates
 contrasted with stocks or levels, 796
 ratio operators, 827
 rational transfer functions
 ARIMA procedure, 222
 reading
 time series data, 64, 124
 reading data files
 DATASOURCE procedure, 603
 reading from a Fame data base
 SASEFAME engine, 2719
 reading from a Haver DLX database
 SASEHAVR engine, 2770
 reading from CRSP data files
 SASECRSP engine, 2581
 reading, with DATA step
 time series data, 122, 123
 recommended for time series ID
 formats, 69
 recursive residuals, 361, 378
 reduced form coefficients
 SIMLIN procedure, 1717, 1722, 1726
 SYSLIN procedure, 1915
 reference
 forecasting models, 2949
 SGPLOT procedure, 85
 regression model with ARMA errors
 ARIMA procedure, 216, 217
 regressor
 definition, 569, 1955
 regressor selection, 3065
 regressors
 forecasting models, 2961
 specifying, 2961
 relation to ARMA models
 state space models, 1861
 Remote Fame Access, Using Fame CHLI
 SASEFAME engine, 2720
 remote monitoring
 NLO system, 184
 RENAME in the DATA step
 SASEFAME engine, 2734
 renaming
 SAS data sets, 47
 renaming variables
 DATASOURCE procedure, 612, 625
 replacing with missing values
 omitted observations, 101
 represented by different series
 cross sectional dimensions, 77

- represented with BY groups
 - cross-sectional dimensions, 77
- reserved words
 - COMPUTAB procedure, 486
- RESET test, 350
 - Ramsey's test, 350
- RESID. variables, 1132, 1137, 1232
- residual
 - plotting, 89
- residual analysis, 2940
- residuals, *see* prediction errors
 - ARIMA procedure, 259
 - AUTOREG procedure, 361
 - FORECAST procedure, 880
 - PANEL procedure, 1356
 - PDLREG procedure, 1433
 - SIMLIN procedure, 1716
 - STATESPACE procedure, 1862
 - structural, 362, 1433
 - SYSLIN procedure, 1902
- response variable, 569, 1955
- restarting the SASEFAME engine
 - SASEFAME engine, 2719
- RESTRICT statement, 362, 721, 1079
- restricted estimates
 - STATESPACE procedure, 1849
- restricted estimation, 362
 - linear models, 721
 - nonlinear models, 1054, 1079, 1154
 - PDLREG procedure, 1434
 - SYSLIN procedure, 1903, 1904
- restricted vector autoregression, 1175
- restrictions on parameters
 - MODEL procedure, 1175
- RETAIN statement
 - computing lags, 106
- RETAIN statement and
 - differencing, 106
 - lags, 106
- root mean square error
 - statistics of fit, 2182, 3127
- row blocks
 - COMPUTAB procedure, 485
- ROWxxxxx: label
 - COMPUTAB procedure, 475
- RPC convergence measure, 1107
- Runs test, 351, 392
- Runs test for
 - Independence, 351, 392
- S**
 - S convergence measure, 1107
 - S matrix
 - definition, 1087
 - MODEL procedure, 1105
 - S matrix used in estimation, 1105
 - S-iterated methods
 - MODEL procedure, 1106
 - sample cross covariances
 - VARMAX procedure, 2261, 2299
 - sample cross-correlations
 - VARMAX procedure, 2260, 2299
 - sample data sets, 2822, 2835
 - sampling frequency
 - changing by interpolation, 121
 - of time series, 69, 81, 121
 - time intervals and, 81
 - sampling frequency of
 - time series data, 81, 121
 - sampling frequency of time series
 - time intervals, 81, 121
 - SAS and CRSP Dates
 - SASECRSP engine, 2595
 - SAS catalogs, *see* CATALOG procedure
 - SAS data sets
 - contents of, 47
 - copying, 47
 - DATA step, 46
 - moving between computer systems, 47
 - printing, 47
 - renaming, 47
 - sorting, 47
 - structured query language, 47
 - summarizing, 47
 - transposing, 47
 - SAS data sets and
 - time series data, 63
 - SAS DATA step
 - SASECRSP engine, 2582
 - SASEFAME engine, 2719
 - SASEHAVR engine, 2771
 - SAS Date Format
 - SASECRSP engine, 2595
 - SAS language features for
 - time series data, 62
 - SAS macros
 - BOXCOXAR macro, 154
 - DFPVALUE macro, 157
 - DFTEST macro, 158
 - LOGTEST macro, 160
 - macros, 153
 - SAS options statement, using
 - VALIDVARNAME=ANY
 - SASEFAME engine, 2730, 2734
 - SAS output data set
 - SASECRSP engine, 2594
 - SASEFAME engine, 2725

- SASEHAVR engine, 2777
- SASEXCCM engine, 2684
- SAS representation for
 - date values, 66
 - datetime values, 67
- SAS Risk Products, 58
- SAS source statements, 3021
- SAS YEARCUTOFF= option
 - DATASOURCE procedure, 623
- SAS/ETS procedures using
 - OUTPUT statement, 81
- SAS/GRAPH software, 50
 - graphics, 50
- SAS/HPF, 49
- SAS/IML software, 52
 - IML, 52
 - matrix language, 52
- SAS/IML Studio software, 52
- SAS/OR software, 53
 - operations research, 53
- SAS/QC software, 54
 - statistical quality control, 54
- SAS/STAT software, 51
- SASECRSP engine
 - @CRSPDB Date Informats, 2597
 - @CRSPDR Date Informats, 2597
 - @CRSPDT Date Informats, 2597
 - CONTENTS procedure, 2582
 - Converting Dates Using the CRSP Date Functions, 2595
 - CRSP and SAS Dates, 2595
 - CRSP Date Formats, 2596
 - CRSP Date Functions, 2595
 - CRSP Date Informats, 2597
 - CRSP Integer Date Format, 2596
 - CRSPDB_SASCAL environment variable, 2582
 - CRSPDCI Date Functions, 2598
 - CRSPDCS Date Functions, 2598
 - CRSPDI2S Date Function, 2598
 - CRSPDIC Date Functions, 2598
 - CRSPDS2I Date Function, 2598
 - CRSPDSC Date Functions, 2598
 - CRSPDT Date Formats, 2596
 - Environment variable, CRSPDB_SASCAL, 2582
 - LIBNAME statement, 2578
 - reading from CRSP data files, 2581
 - SAS and CRSP Dates, 2595
 - SAS DATA step, 2582
 - SAS Date Format, 2595
 - SAS output data set, 2594
 - SETID option, 2582
 - SQL procedure, creating a view, 2582
- SASEFAME engine
 - CONTENTS procedure, 2719
 - convert option, 2719
 - creating a Fame view, 2718
 - DOT as a GLUE character, 2724
 - DRI data files in FAME.db, 2718
 - DRI/McGraw-Hill data files in FAME.db, 2718
 - DROP in the DATA step, 2734
 - Fame data files, 2718
 - Fame glue symbol named DOT, 2730
 - Fame Information Services Databases, 2718
 - fatal error when reading from a Fame data base, 2719
 - finishing the Fame CHLI, 2719
 - GLUE symbol, 2724
 - KEEP in the DATA step, 2734
 - LIBNAME *libref* SASEHAVR '*physical name*' on Windows, 2730
 - LIBNAME *libref* SASEHAVR '*physical name*' on UNIX, 2730
 - LIBNAME interface engine for Fame databases, 2718
 - LIBNAME statement, 2718
 - main economic indicators (OECD) data files in FAME.db, 2718
 - national accounts data files (OECD) in FAME.db, 2718
 - OECD data files in FAME.db, 2718
 - Organization for Economic Cooperation and Development data files in FAME.db, 2718
 - Physical Names on Supported hosts, 2730
 - Physical path name syntax for variety of environments, 2730
 - RANGE= option in the LIBNAME statement, 2737
 - reading from a Fame data base, 2719
 - Remote Fame Access, Using Fame CHLI, 2720
 - RENAME in the DATA step, 2734
 - restarting the SASEFAME engine, 2719
 - SAS DATA step, 2719
 - SAS options statement, using VALIDVARNAME=ANY, 2730, 2734
 - SAS output data set, 2725
 - Special characters in SAS Variable names, the glue symbol DOT, 2730
 - SQL procedure, using clause, 2719
 - SQL procedure, creating a view, 2719
 - Supported hosts, 2718
 - Using CROSSLIST= option to create a view, 2720
 - Using Fame expressions and Fame functions in an INSET, 2720
 - Using INSET= option with the CROSSLIST= option to create a view, 2720

- Using INSET= option with the KEEPLIST= clause to create a view, 2720
- Using KEEPLIST clause to create a view, 2720
- Using RANGE= option to create a view, 2720
- Using WHERE clause with INSET= option to create a view, 2720
- Using WILDCARD= option to create a view, 2720
- VALIDVARNAME=ANY, SAS option
 - statement, 2730, 2734
- viewing a Fame database, 2718
- WHERE in the DATA step, 2737
- SASEHAVR engine
 - creating a Haver view, 2769
 - frequency option, 2770
 - Haver data files, 2769
 - Haver Information Services Databases, 2769
 - LIBNAME interface engine for Haver databases, 2769
 - LIBNAME statement, 2770
 - Listing the Haver selection keys,
 - OUTSELECT=ON, 2771
 - reading from a Haver DLX database, 2770
 - SAS DATA step, 2771
 - SAS output data set, 2777
 - viewing a Haver database, 2769
- SASEXCCM engine
 - LIBNAME statement, 2677
 - SAS output data set, 2684
- SASHELP library, 2835
- saving and restoring
 - forecasting project, 2854
- Savings, 3156
- SBC, *see* Schwarz Bayesian criterion, *see* Schwarz Bayesian information criterion
- scale operators, 826
- SCAN (Smallest Canonical) correlation method, 246
- Schwarz Bayesian criterion
 - ARIMA procedure, 253
 - AUTOREG procedure, 379
 - SBC, 253
- Schwarz Bayesian information criterion
 - BIC, 3127
 - SBC, 3127
 - statistics of fit, 3127
- seasonal adjustment
 - time series data, 2400, 2469
 - X11 procedure, 2400, 2406
 - X12 procedure, 2469
- seasonal ARIMA model
 - notation, 3119
- Seasonal ARIMA model options, 3069
- seasonal component
 - X11 procedure, 2400
 - X12 procedure, 2469
- seasonal dummies, 3125
 - predictor variables, 3125
- seasonal dummy variables
 - forecasting models, 2980
 - specifying, 2980
- seasonal exponential smoothing, 3114
 - smoothing models, 3114
- seasonal forecasting
 - additive Winters method, 875
 - FORECAST procedure, 872, 875
 - WINTERS method, 872
- seasonal model
 - ARIMA model, 215
 - ARIMA procedure, 215
- seasonal transfer function
 - notation, 3121
- seasonal unit root test, 248
- seasonality
 - FORECAST procedure, 877
 - testing for, 158
- seasonality test, 3126
- seasonality tests, 2442
- seasonality, testing for
 - DFTEST macro, 158
- second difference
 - DIF function, 107
 - differencing, 107
- See ordinary differential equations
 - differential equations, 1148
- seemingly unrelated regression, 1090
 - cross-equation covariance matrix, 1090
 - joint generalized least squares, 1876
 - SUR estimation method, 1876
 - SYSLIN procedure, 1883, 1911
 - Zellner estimation, 1876
- Seidel method
 - MODEL procedure, 1219
- Seidel method with General Form Equations
 - MODEL procedure, 1219
- selecting from a list
 - forecasting models, 2899
- selection
 - QLIM Procedure, 1450
- selection criterion, 3048
- sequence operators, 825
- serial correlation correction
 - AUTOREG procedure, 316
- series
 - autocorrelations, 2937
- series adjustments, 3105
- series diagnostics, 2895, 3070, 3125
- series selection, 3071
- series transformations, 2938

- set operators, 826
- SETID option
 - SASECRSP engine, 2582
- SETMISS operator, 821
- SEVERITY procedure
 - BY groups, 1545
 - ODS graph names, 1607
- SGMM simulated generalized method of moments, 1095
- SGPLOT procedure
 - plot axis for time series, 85
 - plotting time series, 84
 - reference, 85
 - time series data, 84
- Shapiro-Wilk test, 1127
 - normality tests, 1127
- sharing
 - forecasting project, 2858
- Shewhart control charts, 54
- shifted
 - time intervals, 127
- shifted intervals, *see* time intervals, shifted
- significance probabilities
 - Dickey-Fuller test, 162
 - PROBDF Function, 162
 - unit root, 162
- significance probabilities for
 - Dickey-Fuller test, 157
- significance probabilities for Dickey-Fuller tests
 - PROBDF Function, 162
- SIMILARITY procedure
 - BY groups, 1650
 - ODS graph names, 1682
- SIMLIN procedure
 - BY groups, 1714
 - dynamic models, 1710, 1711, 1717, 1732
 - dynamic multipliers, 1717, 1718
 - dynamic simulation, 1711
 - EST= data set, 1719
 - ID variables, 1715
 - impact multipliers, 1717, 1722
 - initializing lags, 1720
 - interim multipliers, 1713, 1718, 1721, 1722
 - lags, 1720
 - linear structural equations, 1717
 - multipliers, 1713, 1714, 1717, 1718, 1721, 1722
 - multipliers for higher order lags, 1718, 1732
 - output data sets, 1720, 1721
 - output table names, 1723
 - predicted values, 1711, 1716
 - printed output, 1721
 - reduced form coefficients, 1717, 1722, 1726
 - residuals, 1716
 - simulation, 1711
 - statistics of fit, 1722
 - structural equations, 1717
 - structural form, 1717
 - total multipliers, 1714, 1718, 1721, 1722
 - TYPE=EST data set, 1717
- SIMNLIN procedure, *see* MODEL procedure
- simple
 - data set, 2849
- simple exponential smoothing, 3110
 - smoothing models, 3110
- simulated method of moments
 - GMM, 1095
- simulated nonlinear least squares
 - MODEL procedure, 1098
- simulating
 - ARIMA model, 2999, 3090
- Simulating from a Mixture of Distributions
 - examples, 1301
- simulation
 - MODEL procedure, 1197
 - of time series, 2999, 3090
 - SIMLIN procedure, 1711
 - time series, 2999, 3090
- simultaneous equation bias, 1088
 - SYSLIN procedure, 1877
- single equation estimators
 - SYSLIN procedure, 1910
- single exponential smoothing, *see* exponential smoothing
- Sklar's theorem, 523
- sliding spans analysis, 2426
- Smallest Canonical (SCAN) correlation method, 246
- SMM, 1095
 - GMM, 1095
- SMM simulated method of moments, 1095
- smoothing equations, 3107
 - smoothing models, 3107
- smoothing model specification, 3076, 3079
- smoothing models
 - calculations, 3107
 - damped-trend exponential smoothing, 3113
 - double exponential smoothing, 3111
 - exponential smoothing, 3107
 - forecasting models, 2904, 3107
 - initializations, 3108
 - linear exponential smoothing, 3112
 - missing values, 3108
 - multiplicative seasonal smoothing, 3115
 - predictions, 3108
 - seasonal exponential smoothing, 3114
 - simple exponential smoothing, 3110
 - smoothing equations, 3107
 - smoothing state, 3107
 - smoothing weights, 3109

- specifying, 2904
- standard errors, 3110
- underlying model, 3107
- Winters Method, 3116, 3117
- smoothing state, 3107
 - smoothing models, 3107
- smoothing weights, 3079, 3109
 - additive-invertible region, 3109
 - boundaries, 3109
 - FORECAST procedure, 876
 - optimizations, 3109
 - smoothing models, 3109
 - specifications, 3109
 - weights, 3109
- solution mode output
 - MODEL procedure, 1209
- solution modes
 - MODEL procedure, 1194, 1217
- SOLVE Data Sets
 - MODEL procedure, 1225
- SORT procedure, 47
 - sorting, 47
- sorting, *see* SORT procedure
 - forecasting models, 2946, 3020
 - SAS data sets, 47
 - time series data, 70
- sorting by
 - ID variables, 70
- Special characters in SAS Variable names, the glue
 - symbol DOT
 - SASEFAME engine, 2730
- specification tests
 - PANEL procedure, 1393
- specifications
 - smoothing weights, 3109
- specifying
 - adjustments, 2963
 - ARIMA models, 2907
 - combination models, 2924
 - custom models, 2914
 - dynamic regression, 2964
 - Factored ARIMA models, 2911
 - forecasting models, 2895
 - interventions, 2968
 - level shifts, 2973
 - predictor variables, 2953
 - regressors, 2961
 - seasonal dummy variables, 2980
 - smoothing models, 2904
 - state space models, 1840
 - time ID variable, 3085
 - trend changes, 2971
 - trend curves, 2957
- SPECTRA procedure
 - BY groups, 1744
 - Chirp-Z algorithm, 1746
 - coherency of cross-spectrum, 1751
 - cospectrum estimate, 1751
 - cross-periodogram, 1751
 - cross-spectral analysis, 1740, 1741, 1751
 - cross-spectrum, 1751
 - fast Fourier transform, 1746
 - finite Fourier transform, 1740
 - Fourier coefficients, 1751
 - Fourier transform, 1740
 - frequency, 1750
 - kernels, 1747
 - output data sets, 1750
 - output table names, 1752
 - periodogram, 1740, 1751
 - quadrature spectrum, 1751
 - spectral analysis, 1740
 - spectral density estimate, 1740, 1751
 - spectral window, 1745
 - white noise test, 1749, 1752
- spectral analysis
 - SPECTRA procedure, 1740
- spectral density estimate
 - SPECTRA procedure, 1740, 1751
- spectral window
 - SPECTRA procedure, 1745
- SPLINE method
 - EXPAND procedure, 811
- splitting series
 - time series data, 115
- splitting time series data sets, 115
- SQL procedure, 47
 - structured query language, 47
- SQL procedure, creating a view
 - SASECRSP engine, 2582
- SQL procedure, using clause
 - SASEFAME engine, 2719
- SQL procedure, creating a view
 - SASEFAME engine, 2719
- square root
 - transformations, 3105
- square root transformation, *see* transformations
- SSM procedure
 - BY groups, 1777
 - ODS table names, 1807
 - syntax, 1775
 - table names, 1807
 - time intervals, 1779
- stable seasonality test, 2442
- standard errors
 - smoothing models, 3110
- standard form
 - of time series data set, 74

- standard form of
 - time series data, 74
- STANDARD procedure, 47
 - standardized values, 47
- standardized values, *see* STANDARD procedure
- starting dates of
 - time intervals, 98, 99
- starting values
 - GARCH model, 346
 - MODEL procedure, 1110, 1116
- state and area employment, hours, and earnings
 - survey, *see* DATASOURCE procedure
- state space model
 - UCM procedure, 2150
- state space models
 - form of, 1830
 - relation to ARMA models, 1861
 - specifying, 1840
 - state vector of, 1830
 - STATESPACE procedure, 1830
- state transition equation
 - of a state space model, 1830
- state vector
 - of a state space model, 1830
- state vector of
 - state space models, 1830
- state-space representation
 - VARMAX procedure, 2277
- STATESPACE procedure
 - automatic forecasting, 1830
 - BY groups, 1847
 - canonical correlation analysis, 1831, 1854
 - confidence limits, 1863
 - differencing, 1849
 - forecasting, 1830, 1859
 - ID variables, 1848
 - Kalman filter, 1832
 - multivariate forecasting, 1830
 - multivariate time series, 1830
 - output data sets, 1862–1864
 - output table names, 1866
 - predicted values, 1859, 1862
 - printed output, 1865
 - residuals, 1862
 - restricted estimates, 1849
 - state space models, 1830
 - time intervals, 1847
 - Yule-Walker equations, 1852
- static simulation, 1146
 - MODEL procedure, 1146
- static simulations
 - MODEL procedure, 1194
- stationarity
 - and state space models, 1833
 - ARIMA procedure, 198
 - nonstationarity, 198
 - of time series, 213
 - prediction errors, 2873
 - testing for, 158
 - VARMAX procedure, 2305, 2313
- stationarity tests, 233, 248, 351
- stationarity, testing for
 - DFTEST macro, 158
- statistical quality control
 - SAS/QC software, 54
- statistics of fit, 2182, 2867, 2876, 3080, 3126
 - adjusted R-square, 2182, 3127
 - Akaike's information criterion, 3127
 - Amemiya's prediction criterion, 3127
 - Amemiya's R-square, 2182, 3127
 - corrected sum of squares, 3127
 - error sum of squares, 3127
 - goodness of fit, 2876
 - goodness-of-fit statistics, 2182, 3126
 - mean absolute error, 3127
 - mean absolute percent error, 2182, 3127
 - mean percent error, 3128
 - mean prediction error, 3128
 - mean square error, 2182
 - mean squared error, 3127
 - nonmissing observations, 3126
 - number of observations, 3126
 - R square statistic, 2182
 - R-square statistic, 3127
 - random walk R-square, 2182, 3127
 - root mean square error, 2182, 3127
 - Schwarz Bayesian information criterion, 3127
 - SIMLIN procedure, 1722
 - uncorrected sum of squares, 3126
- step
 - interventions, 3123
- step function, *see* step interventions
- interpolation of time series, 812
- intervention model and, 220
- step interventions, 3123
 - step function, 3123
- STEP method
 - EXPAND procedure, 812
- STEPAR method
 - FORECAST procedure, 869
- stepwise autoregression
 - AUTOREG procedure, 328
 - FORECAST procedure, 846, 869
- stochastic simulation
 - MODEL procedure, 1197
- stock data files, *see* DATASOURCE procedure
- stocks
 - contrasted with flow variables, 796

- stored in SAS data sets
 - time series data, 73
- storing programs
 - MODEL procedure, 1243
- structural
 - predicted values, 361, 401, 1433
 - residuals, 362, 1433
- structural change
 - Chow test for, 348
- structural equations
 - SIMLIN procedure, 1717
- structural form
 - SIMLIN procedure, 1717
- structural predictions
 - AUTOREG procedure, 401
- structured query language, *see* SQL procedure
 - SAS data sets, 47
- Student t copula, 526
- subset model
 - ARIMA model, 215
 - ARIMA procedure, 215
 - AUTOREG procedure, 330
- subsetting data, *see* WHERE statement
- subsetting data files
 - DATASOURCE procedure, 603, 615
- summarizing
 - SAS data sets, 47
- summary of
 - time intervals, 129
- summary statistics
 - MODEL procedure, 1212
- summation
 - higher order sums, 112
 - multi-period lags and, 111, 112
 - of time series, 111
- summation of
 - time series data, 111, 112
- Supported hosts
 - SASEFAME engine, 2718
- SUR estimation method, *see* seemingly unrelated regression
- Switching Regression example
 - examples, 1297
- syntax for
 - date values, 66
 - datetime values, 67
 - time intervals, 82
 - time values, 67
- SYSLIN procedure
 - Basman test, 1902, 1916
 - BY groups, 1900
 - endogenous variables, 1878
 - exogenous variables, 1878

- full information maximum likelihood, 1886, 1911
- Fuller's modification to LIML, 1916
- instrumental variables, 1878
- iterated seemingly unrelated regression, 1911
- iterated three-stage least squares, 1911
- jointly dependent variables, 1878
- K-class estimation, 1910
- lagged endogenous variables, 1878
- limited information maximum likelihood, 1910
- minimum expected loss estimator, 1910
- ODS graph names, 1922
- output data sets, 1917, 1919
- output table names, 1921
- over identification restrictions, 1916
- predetermined variables, 1878
- predicted values, 1902
- printed output, 1919
- R-square statistic, 1913
- reduced form coefficients, 1915
- residuals, 1902
- restricted estimation, 1903, 1904
- seemingly unrelated regression, 1883, 1911
- simultaneous equation bias, 1877
- single equation estimators, 1910
- system weighted MSE, 1913
- system weighted R-square, 1913, 1919
- tests of hypothesis, 1906, 1907
- three-stage least squares, 1884, 1911
- two-stage least squares, 1881, 1910
- SYSNLIN procedure, *see* MODEL procedure
- system weighted MSE
 - SYSLIN procedure, 1913
- system weighted R-square
 - SYSLIN procedure, 1913, 1919
- systems of
 - ordinary differential equations (ODEs), 1290
- systems of differential equations
 - examples, 1290
- systems of ordinary differential equations
 - MODEL procedure, 1290

T

- t distribution
 - GARCH model, 375
- table cells, direct access to
 - COMPUTAB procedure, 485
- table names
 - SSM procedure, 1807
 - UCM procedure, 2173
- TABULATE procedure, 47
 - tabulating data, 47
- tabulating data, *see* TABULATE procedure

- taxes
 - LOAN procedure, 926
- TCOUNTREG procedure
 - bounds on parameter estimates, 1947
 - BY groups, 1948
 - output table names, 1980
 - restrictions on parameter estimates, 1953
 - syntax, 1944
- tentative order selection
 - VARMAX procedure, 2299
- test of hypotheses
 - nonlinear models, 1084
- TEST statement, 363
- testing for
 - heteroscedasticity, 330
 - seasonality, 158
 - stationarity, 158
 - unit root, 158
- testing order of
 - differencing, 158
- testing overidentifying restrictions, 1094
- tests of hypothesis
 - SYSLIN procedure, 1906, 1907
- tests of parameters, 363, 722, 1084
- tests on parameters
 - MODEL procedure, 1156
- TGARCH model, 374
 - AUTOREG procedure, 338
 - Threshold GARCH model, 374
- The D-method
 - example, 1297
- three-stage least squares, 1090
 - 3SLS estimation method, 1876
 - SYSLIN procedure, 1884, 1911
- Threshold GARCH model, *see* TGARCH model
- time functions, 93
- time ID creation, 3081–3084
- time ID variable, 2831
 - creating, 2881
 - ID variable, 2831
 - observation numbers, 2885
 - specifying, 3085
- time intervals, 2837
 - alignment of, 128
 - ARIMA procedure, 261
 - calendar calculations and, 102
 - ceiling of, 100
 - checking data periodicity, 101
 - counting, 97, 100
 - data frequency, 2826
 - date values, 126
 - datetime values, 126
 - ending dates of, 99
 - examples of, 132
 - EXPAND procedure, 807
 - EXPAND procedure and, 121
 - FORECAST procedure, 868
 - frequency of data, 2826
 - functions, 145
 - functions for, 96, 145
 - ID values for, 98
 - incrementing dates by, 96, 97
 - INTCK function and, 97, 100
 - INTERVAL= option and, 82
 - intervals, 82
 - INTNX function and, 96
 - midpoint dates of, 99
 - naming, 82, 126
 - periodicity of time series, 81, 121
 - plot axis and, 85
 - plot reference lines and, 85
 - sampling frequency of time series, 81, 121
 - shifted, 127
 - SSM procedure, 1779
 - starting dates of, 98, 99
 - STATESPACE procedure, 1847
 - summary of, 129
 - syntax for, 82
 - UCM procedure, 2131
 - use with SAS/ETS procedures, 83
 - VARMAX procedure, 2256
 - widths of, 99, 807
- time intervals and
 - calendar calculations, 102
 - date values, 98
 - frequency, 81, 121
 - sampling frequency, 81
- time intervals, functions
 - interval functions, 96
- time intervals, shifted
 - shifted intervals, 127
- time range
 - DATASOURCE procedure, 622
- time range of data
 - DATASOURCE procedure, 607
- time ranges, 2948, 3014, 3086
 - of time series, 75
- time ranges of
 - time series data, 75
- time series
 - definition, 2822
 - diagnostic tests, 2895
 - in SAS data sets, 2822
 - simulation, 2999, 3090
- time series cross sectional form
 - TSCSREG procedure and, 78
- time series cross-sectional form
 - BY groups and, 77

- ID variables for, 77
 - of time series data set, 77
 - TSCSREG procedure and, 2091
- time series cross-sectional form of
 - time series data set, 77
- time series data
 - aggregation of, 793, 796
 - changing periodicity, 121, 793
 - converting frequency of, 793
 - differencing, 103–109
 - distribution of, 796
 - embedded missing values in, 76
 - giving dates to, 65
 - ID variable for, 65
 - interpolation, 121
 - interpolation of, 120, 121, 795
 - lagging, 103–109
 - leads, 110
 - merging series, 116
 - missing values, 795
 - missing values and, 75, 76
 - omitted observations in, 76
 - overlay plot of, 86
 - percent change calculations, 108, 109
 - periodicity of, 81, 121
 - PLOT procedure, 90
 - plotting, 83
 - reading, 64, 124
 - reading, with DATA step, 122, 123
 - sampling frequency of, 81, 121
 - SAS data sets and, 63
 - SAS language features for, 62
 - seasonal adjustment, 2400, 2469
 - SGPLOT procedure, 84
 - sorting, 70
 - splitting series, 115
 - standard form of, 74
 - stored in SAS data sets, 73
 - summation of, 111, 112
 - time ranges of, 75
 - Time Series Viewer, 84
 - transformation of, 798, 813
 - transposing, 116, 117
- time series data and
 - missing values, 75
- time series data set
 - interleaved form of, 78
 - time series cross-sectional form of, 77
- time series forecasting, 3088
- Time Series Forecasting System
 - invoking, 2986
 - invoking from SAS/AF and SAS/EIS applications, 2986
 - running in unattended mode, 2986
- time series methods
 - FORECAST procedure, 859
- time series variables
 - DATASOURCE procedure, 604, 627
- Time Series Viewer, 2861, 2933, 3092
 - graphs, 2861
 - invoking, 2985
 - plots, 2861
 - saving graphs and tables, 3066, 3068
 - time series data, 84
- Time Series Viewer procedure
 - plotting time series, 84
- time trend models
 - FORECAST procedure, 857
- Time Value Analysis, 3204
- time values
 - defined, 67
 - formats, 144
 - functions, 145
 - informats, 138
 - syntax for, 67
- time variable, 1152
 - MODEL procedure, 1152
- time variables
 - computing from datetime values, 96
 - introduced, 93
- TIMEPLOT procedure, 47, 91
- TIMESERIES procedure
 - BY groups, 2032
 - ODS graph names, 2072
- to higher frequency
 - interpolation, 121
- to lower frequency
 - interpolation, 121
- to SAS/ETS software
 - menu interfaces, 43, 44
- to standard form
 - transposing time series, 116, 117
- tobit
 - QLIM Procedure, 1450
- Toeplitz matrix
 - AUTOREG procedure, 366
- total multipliers
 - SIMLIN procedure, 1714, 1718, 1721, 1722
- trading-day component
 - X11 procedure, 2400, 2406
- transfer function model
 - ARIMA procedure, 216, 220, 253
 - denominator factors, 221
 - numerator factors, 221
- transfer functions, 3120
 - forecasting models, 3120
- transformation of
 - time series data, 798, 813

- transformation of time series
 - EXPAND procedure, 798, 813
- transformations, 3075
 - Box Cox, 3105
 - Box Cox transformation, 3105
 - log, 3105
 - log transformation, 3105
 - logistic, 3105
 - square root, 3105
 - square root transformation, 3105
- transformed models
 - predicted values, 1139
- transition equation
 - of a state space model, 1830
- transition matrix
 - of a state space model, 1831
- TRANSPOSE procedure, 47, 116, 117, 119, 123
 - transposing SAS data sets, 47
- TRANSPOSE procedure and
 - transposing time series, 116
- transposing
 - SAS data sets, 47
 - time series data, 116, 117
- transposing SAS data sets, *see* TRANSPOSE procedure
- transposing time series
 - cross-sectional dimensions, 117
 - from interleaved form, 116
 - from standard form, 119
 - to standard form, 116, 117
 - TRANSPOSE procedure and, 116
- trend changes
 - specifying, 2971
- trend curves, 3122
 - cubic, 3122
 - exponential, 3123
 - forecasting models, 2957
 - hyperbolic, 3123
 - linear, 3122
 - logarithmic, 3122
 - logistic, 3122
 - power curve, 3123
 - predictor variables, 3122
 - quadratic, 3122
 - specifying, 2957
- trend cycle component
 - X11 procedure, 2400, 2406
- trend test, 3126
- TRIM operator, 820
- TRIMLEFT operator, 820
- TRIMRIGHT operator, 820
- triple exponential smoothing, *see* exponential smoothing
- troubleshooting estimation convergence problems
 - MODEL procedure, 1109
- troubleshooting simulation problems
 - MODEL procedure, 1220
- true interest rate
 - LOAN procedure, 926
- Truncated Regression Models
 - QLIM procedure, 1477
- trust region
 - optimization methods, 357, 562, 971, 1947
- trust region method, 357, 562, 971, 1947
 - AUTOREG procedure, 346
- TSCSREG procedure
 - BY groups, 2099
 - estimation techniques, 2094
 - ID variables, 2099
 - output table names, 2102
 - panel data, 2091
- TSCSREG procedure and
 - time series cross sectional form, 78
 - time series cross-sectional form, 2091
- TSVIEW command, 2985
- Turning Point test, 355, 392
- Turning Point test for
 - Independence, 355, 392
- two-stage least squares, 1088
 - 2SLS estimation method, 1876
 - SYSLIN procedure, 1881, 1910
- two-step full transform method
 - AUTOREG procedure, 369
- two-way
 - fixed effects model, 1361
 - random effects model, 1370
- two-way fixed effects model
 - PANEL procedure, 1361
- two-way fixed-effects model, 1361
- two-way random effects model
 - PANEL procedure, 1370
- two-way random-effects model, 1370
- type of input data file
 - DATASOURCE procedure, 617
- _TYPE_ variable
 - and interleaved time series, 78, 79
 - overlay plots, 88
- TYPE=EST data set
 - SIMLIN procedure, 1717
- types of loans
 - LOAN procedure, 902
- Types of Tobit Model
 - QLIM procedure, 1475
- U
 - U.S. Bureau of Economic Analysis data files
 - DATASOURCE procedure, 635

- U.S. Bureau of Labor Statistics data files
 - DATASOURCE procedure, 636
- UCM procedure
 - BY groups, 2124
 - ODS graph names, 2176
 - ODS Graphics, 2118
 - ODS table names, 2173
 - parameters, 2121–2132, 2134–2144
 - state space model, 2150
 - Statistical Graphics, 2163
 - syntax, 2115
 - table names, 2173
 - time intervals, 2131
- unattended mode, 2986
- unconditional forecasts
 - ARIMA procedure, 260
- unconditional least squares
 - AR initial conditions, 1169
 - MA Initial Conditions, 1169
- uncorrected sum of squares
 - statistics of fit, 3126
- underlying model
 - smoothing models, 3107
- Uniform Periodic Equivalent, 3208
- unit root
 - Dickey-Fuller test, 162
 - of a time series, 158
 - significance probabilities, 162
 - testing for, 158
- unit roots
 - KPSS test, 389
 - Phillips-Perron test, 351–353, 385
- univariate autoregression, 1170
- univariate model diagnostic checks
 - VARMAX procedure, 2321
- univariate moving average models, 1177
- UNIVARIATE procedure, 47, 1295
 - descriptive statistics, 47
- unlinking viewer windows, 2937
- unrestricted vector autoregression, 1173
- use with SAS/ETS procedures
 - time intervals, 83
- used for state space modeling
 - Kalman filter, 1832
- used to select state space models
 - Akaike information criterion, 1853
 - vector autoregressive models, 1851
 - Yule-Walker estimates, 1852
- Using CROSSTIME= option to create a view
 - SASEFAME engine, 2720
- Using Fame expressions and Fame functions in an INSET
 - SASEFAME engine, 2720

- Using INSET= option with the CROSSTIME= option
 - to create a view
 - SASEFAME engine, 2720
- Using INSET= option with the KEEPTIME= clause to
 - create a view
 - SASEFAME engine, 2720
- Using KEEPTIME clause to create a view
 - SASEFAME engine, 2720
- using models to forecast
 - MODEL procedure, 1197
- Using RANGE= option to create a view
 - SASEFAME engine, 2720
- using solution modes
 - MODEL procedure, 1194
- Using WHERE clause with INSET= option to create
 - a view
 - SASEFAME engine, 2720
- Using WILDCARD= option to create a view
 - SASEFAME engine, 2720

V

- V matrix
 - Generalized Method of Moments, 1091, 1096
- VALIDVARNAME=ANY, SAS option statement
 - SASEFAME engine, 2730, 2734
- variable list
 - DATASOURCE procedure, 626
- variables in model program
 - MODEL procedure, 1228
- variance components
 - Fuller Battese, 1368
 - Nerlove, 1370
 - Wallace Hussain, 1369
 - Wansbeek Kapteyn's, 1368
- VARMAX procedure
 - Akaike Information Criterion, 2320
 - asymptotic distribution of impulse response
 - functions, 2307, 2315
 - asymptotic distribution of the parameter
 - estimation, 2315
 - Bayesian vector autoregressive models, 2268, 2310
 - cointegration, 2322
 - cointegration testing, 2266, 2326
 - common trends, 2322
 - common trends testing, 2268, 2323
 - computational details, 2364
 - confidence limits, 2351
 - convergence problems, 2364
 - covariance stationarity, 2346
 - CPU requirements, 2365
 - decomposition of prediction error covariance, 2261, 2297

- Dickey-Fuller test, 2266
 - differencing, 2257
 - dynamic simultaneous equation models, 2280
 - example of Bayesian VAR modeling, 2230
 - example of Bayesian VECM modeling, 2237
 - example of causality testing, 2245
 - example of cointegration testing, 2233
 - example of multivariate GARCH modeling, 2347
 - example of restricted parameter estimation and testing, 2242
 - example of VAR modeling, 2223
 - example of VARMA modeling, 2316
 - example of vector autoregressive modeling with exogenous variables, 2238
 - example of vector error correction modeling, 2232
 - forecasting, 2294
 - forecasting of Bayesian vector autoregressive models, 2312
 - Granger causality test, 2308
 - impulse response function, 2261, 2283
 - infinite order AR representation, 2261
 - infinite order MA representation, 2261, 2283
 - invertibility, 2313
 - long-run relations testing, 2335
 - memory requirements, 2365
 - minimum information criteria method, 2304
 - missing values, 2276
 - multivariate GARCH Modeling, 2271
 - multivariate model diagnostic checks, 2320
 - ODS graph names, 2363
 - Output Data Sets, 2350
 - partial autoregression coefficient, 2263, 2300
 - partial canonical correlation, 2263, 2303
 - partial correlation, 2301
 - prediction error covariance, 2260, 2294, 2296
 - sample cross covariances, 2261, 2299
 - sample cross-correlations, 2260, 2299
 - state-space representation, 2277
 - stationarity, 2305, 2313
 - tentative order selection, 2299
 - time intervals, 2256
 - univariate model diagnostic checks, 2321
 - vector autoregressive models, 2305
 - vector autoregressive models with exogenous variables, 2308
 - vector autoregressive moving-average models, 2276, 2313
 - vector error correction models, 2270, 2325
 - weak exogeneity testing, 2337
 - Yule-Walker estimates, 2264
 - vector autoregressive models, 1175
 - used to select state space models, 1851
 - VARMAX procedure, 2305
 - vector autoregressive models with exogenous variables
 - VARMAX procedure, 2308
 - vector autoregressive moving-average models
 - VARMAX procedure, 2276, 2313
 - vector error correction models
 - VARMAX procedure, 2270, 2325
 - vector moving average models, 1179
 - viewing a Fame database, *see* SASEFAME engine
 - viewing a Haver database, *see* SASEHAVR engine
 - viewing time series, 2861
- W**
- Wald test
 - linear hypotheses, 723
 - nonlinear hypotheses, 992, 1085, 1156, 1486
 - Wallace Hussain
 - variance components, 1369
 - Wansbeek Kapteyn's
 - variance components, 1368
 - weak exogeneity testing
 - VARMAX procedure, 2337
 - _WEIGHT_ variable
 - MODEL procedure, 1130
 - weights, *see* smoothing weights
 - WHERE in the DATA step
 - SASEFAME engine, 2737
 - WHERE statement
 - subsetting data, 48
 - white noise test
 - SPECTRA procedure, 1749, 1752
 - white noise test of the residuals, 236
 - white noise test of the series, 234
 - White's test, 1129
 - heteroscedasticity tests, 1129
 - widths of
 - time intervals, 99, 807
 - WINTERS method
 - seasonal forecasting, 872
 - Winters Method, 3116, 3117
 - Holt-Winters Method, 3116
 - smoothing models, 3116, 3117
 - Winters method
 - FORECAST procedure, 846, 872
 - Holt-Winters method, 875
 - Wong and Li's test, 399
 - Wong and Li's test for
 - Heteroscedasticity, 399
- X**
- X-11 ARIMA methodology
 - X11 procedure, 2424

X-11 seasonal adjustment method, *see* X11 procedure
 X-11-ARIMA seasonal adjustment method, *see* X11 procedure
 X-12 seasonal adjustment method, *see* X12 procedure
 X-12-ARIMA seasonal adjustment method, *see* X12 procedure
 X11 procedure
 BY groups, 2412
 Census X-11 method, 2400
 Census X-11 methodology, 2425
 data requirements, 2430
 differences with X11ARIMA/88, 2424
 ID variables, 2412, 2414
 irregular component, 2400, 2406
 model selection for X-11-ARIMA method, 2434
 output data sets, 2437, 2438
 output table names, 2451
 printed output, 2440
 seasonal adjustment, 2400, 2406
 seasonal component, 2400
 trading-day component, 2400, 2406
 trend cycle component, 2400, 2406
 X-11 ARIMA methodology, 2424
 X-11 seasonal adjustment method, 2400
 X-11-ARIMA seasonal adjustment method, 2400
 X12 procedure
 BY groups, 2489
 Census X-12 method, 2468
 ID variables, 2494
 INPUT variables, 2495
 ODS graph names, 2523
 ODS Graphics, 2479
 seasonal adjustment, 2469
 seasonal component, 2469
 X-12 seasonal adjustment method, 2468
 X-12-ARIMA seasonal adjustment method, 2468

Y

year-over-year
 percent change calculations, 108
 yearly averages
 percent change calculations, 109
 Yule-Walker
 AR initial conditions, 1169
 Yule-Walker equations
 AUTOREG procedure, 366
 STATESPACE procedure, 1852
 Yule-Walker estimates
 AUTOREG procedure, 366
 used to select state space models, 1852
 VARMAX procedure, 2264
 Yule-Walker method as
 generalized least-squares, 369

Z

Zellner estimation, *see* seemingly unrelated regression
 Zellner's two-stage method
 PANEL procedure, 1377
 zooming graphs, 2935

Syntax Index

Symbols

2SLS option

FIT statement (MODEL), 1066, 1088

PROC SYSLIN statement, 1898

3SLS option

FIT statement (MODEL), 1066, 1090, 1188

PROC SYSLIN statement, 1898

A

A option

PROC SPECTRA statement, 1743

A= option

FIXED statement (LOAN), 915

ABORT, 1242

ABS function, 1235

ACCEPTDEFAULT option

AUTOMDL statement (X12), 2486

ACCUMULATE= option

FORECAST statement (ESM), 761

ID statement (ESM), 764

ID statement (SIMILARITY), 1651

ID statement (TIMESERIES), 2038

INPUT statement (SIMILARITY), 1654

TARGET statement (SIMILARITY), 1656

VAR statement (TIMESERIES), 2047

ADDITIVE option

MONTHLY statement (X11), 2413

QUARTERLY statement (X11), 2418

ADDMAXIT= option

MODEL statement (MDC), 969

ADDRANDOM option

MODEL statement (MDC), 969

ADDVALUE option

MODEL statement (MDC), 969

ADF= option

ARM statement (LOAN), 920

ADJMEAN option

PROC SPECTRA statement, 1743

ADJSMMV option

FIT statement (MODEL), 1064

ADJUST statement

X12 procedure, 2484

ADJUSTFREQ= option

ARM statement (LOAN), 920

ADJUSTMEAN

SPECTRA statement (TIMESERIES), 2042

SSA statement (TIMESERIES), 2043

AGGMODE=RELAXED option

LIBNAME statement (SASEHAVR), 2775

AGGMODE=STRICT option

LIBNAME statement (SASEHAVR), 2775

ALIGN= option

FORECAST statement (ARIMA), 145, 240

ID statement (ENG), 145

ID statement (ESM), 145, 764

ID statement (HPF), 145

ID statement (HPFDIAGNOSE), 145

ID statement (HPFEVENTS), 145

ID statement (SIMILARITY), 145, 1652

ID statement (TIMESERIES), 145, 2039

ID statement (UCM), 145, 2131

ID statement (VARMAX), 145, 2256

PROC DATASOURCE statement, 145, 616

PROC EXPAND statement, 145, 801, 806

PROC FORECAST statement, 145, 863

TIMEID procedure, 2002

ALL option

COMPARE statement (LOAN), 922

MODEL statement (AUTOREG), 347

MODEL statement (MDC), 970

MODEL statement (PDLREG), 1431

MODEL statement (SYSLIN), 1901

PROC SYSLIN statement, 1899

TEST statement (ENTROPY), 723

TEST statement (MDC), 977

TEST statement (MODEL), 1085

TEST statement (PANEL), 1357

TEST statement (QLIM), 1469

ALPHA option

SPECTRA statement (TIMESERIES), 2042

ALPHA= option

FORECAST statement (ARIMA), 240

FORECAST statement (ESM), 761

FORECAST statement (UCM), 2130

IDENTIFY statement (ARIMA), 231

MODEL statement (SYSLIN), 1901

OUTLIER statement (ARIMA), 239

OUTPUT statement (VARMAX), 2273

PROC FORECAST statement, 863

PROC SEVERITY statement, 1544

PROC SYSLIN statement, 1898

ALPHA=option

OUTLIER statement (UCM), 2137

ALPHACLI= option

- OUTPUT statement (AUTOREG), 360
- OUTPUT statement (PDLREG), 1432
- ALPHACLM= option
 - OUTPUT statement (AUTOREG), 360
 - OUTPUT statement (PDLREG), 1433
- ALPHACSM= option
 - OUTPUT statement (AUTOREG), 360
- ALTPARM option
 - ESTIMATE statement (ARIMA), 234, 255
- ALTW option
 - PROC SPECTRA statement, 1744
- AMOUNT= option
 - FIXED statement (LOAN), 915
- AMOUNTPCT= option
 - FIXED statement (LOAN), 916
- AOCV= option
 - OUTLIER statement (X12), 2496
- APCT= option
 - FIXED statement (LOAN), 916
- %AR macro, 1175, 1176
- AR option
 - IRREGULAR statement (UCM), 2134
- AR= option
 - BOXCOXAR macro, 155
 - DFTEST macro, 158
 - ESTIMATE statement (ARIMA), 237
 - LOGTEST macro, 160
 - PROC FORECAST statement, 863
- ARCHTEST option
 - MODEL statement (AUTOREG), 347
- ARCOS function, 1235
- ARIMA procedure, 224
 - syntax, 224
- ARIMA procedure, PROC ARIMA statement
 - PLOT option, 227
- ARIMA statement
 - X11 procedure, 2409
 - X12 procedure, 2485
- ARM statement
 - LOAN procedure, 919
- ARMACV= option
 - AUTOMDL statement (X12), 2486
- ARMAX= option
 - PROC STATESPACE statement, 1845
- ARSIN function, 1235
- ARTEST= option
 - MODEL statement (PANEL), 1352
- ASCII option
 - PROC DATASOURCE statement, 617
- ASTART= option
 - PROC FORECAST statement, 863
- AT= option
 - COMPARE statement (LOAN), 922
- ATAN function, 1235

- ATOL= option
 - MODEL statement (PANEL), 1352
- ATTRIBUTE statement
 - DATASOURCE procedure, 624
- AUTOMDL statement
 - X12 procedure, 2485
- AUTOREG procedure, 338
 - syntax, 338
- AUTOREG procedure, AUTOREG statement, 344
- AUTOREG statement
 - UCM procedure, 2121
- AUXDATA= option
 - PROC X12 statement, 2477

B

- B option
 - ARM statement (LOAN), 921
- BACK= option
 - ESTIMATE statement (UCM), 2127
 - FORECAST statement (ARIMA), 240
 - FORECAST statement (UCM), 2130
 - OUTPUT statement (VARMAX), 2273
 - PROC ESM statement, 758
 - PROC STATESPACE statement, 1847
- BACKCAST= option
 - ARIMA statement (X11), 2409
- BACKLIM= option
 - ESTIMATE statement (ARIMA), 237
- BACKSTEP option
 - MODEL statement (AUTOREG), 356
- BALANCED option
 - AUTOMODL statement (X12), 2487
- BALLOON statement
 - LOAN procedure, 919
- BALLOONPAYMENT= option
 - BALLOON statement (LOAN), 919
- BANDOPT= option
 - MODEL statement (PANEL), 1352
- BASE = option
 - PROC PANEL statement, 1348
- BCX option
 - MODEL statement (QLIM), 1466
- BDS option
 - MODEL statement (AUTOREG), 347
- BESTCASE option
 - ARM statement (LOAN), 921
- BI option
 - COMPARE statement (LOAN), 923
- BLOCK option
 - PROC MODEL statement, 1052, 1255
- BLOCKSEASON statement
 - UCM procedure, 2122
- BLOCKSIZE= option

BLOCKSEASON statement (UCM), 2123
 BLUS= option
 OUTPUT statement (AUTOREG), 360
 BOUNDARYALIGN= option
 ID statement (TIMESERIES), 2039
 BOUNDS statement
 COUNTREG procedure, 563
 ENTROPY procedure, 717
 MDC procedure, 965
 MODEL procedure, 1054
 QLIM procedure, 1460
 TCOUNTREG procedure, 1947
 BOXCOXAR
 macro, 155
 macro variable, 156
 BP option
 COMPARE statement (LOAN), 923
 MODEL statement (PANEL), 1352
 BREAKINTEREST option
 COMPARE statement (LOAN), 923
 BREAKPAYMENT option
 COMPARE statement (LOAN), 923
 BREUSCH= option
 FIT statement (MODEL), 1069
 BSTART= option
 PROC FORECAST statement, 864
 BTOL= option
 MODEL statement (PANEL), 1353
 BTWNG option
 MODEL statement (PANEL), 1353
 BUYDOWN statement
 LOAN procedure, 922
 BUYDOWNRATES= option
 BUYDOWN statement (LOAN), 922
 BY Statement
 COPULA procedure, 518
 BY statement
 ARIMA procedure, 230
 AUTOREG procedure, 344
 COMPUTAB procedure, 475
 COUNTREG procedure, 563
 ENTROPY procedure, 719
 ESM procedure, 761
 EXPAND procedure, 803
 FORECAST procedure, 867
 MDC procedure, 966
 MODEL procedure, 1056
 PANEL procedure, 1348
 PDLREG procedure, 1430
 QLIM procedure, 1461
 SEVERITY procedure, 1545
 SIMILARITY procedure, 1650
 SIMLIN procedure, 1714
 SPECTRA procedure, 1744

SSM procedure, 1777
 STATESPACE procedure, 1847
 SYSLIN procedure, 1900
 TCOUNTREG procedure, 1948
 TIMEID procedure, 2001
 TIMESERIES procedure, 2032
 TSCSREG procedure, 2099
 UCM procedure, 2124
 VARMAX procedure, 2252
 X11 procedure, 2412
 X12 procedure, 2489

C

C= option
 PROC SEVERITY statement, 1544
 CANCORR option
 PROC STATESPACE statement, 1845
 CAPS= option
 ARM statement (LOAN), 920
 CAUCHY option
 ERRORMODEL statement (MODEL), 1060
 CAUSAL statement
 VARMAX procedure, 2253
 CDEC= option
 PROC COMPUTAB statement, 469
 CDF= option
 ERRORMODEL statement (MODEL), 1061
 CELL statement
 COMPUTAB procedure, 473
 CENSORED option
 ENDOGENOUS statement (QLIM), 1462
 MODEL statement (ENTROPY), 720
 CENTER
 SPECTRA statement (TIMESERIES), 2042
 SSA statement (TIMESERIES), 2043
 CENTER option
 ARIMA statement (X11), 2411
 IDENTIFY statement (ARIMA), 231
 MODEL statement (AUTOREG), 344
 MODEL statement (VARMAX), 2257
 PROC SPECTRA statement, 1743
 CEV= option
 OUTPUT statement (AUTOREG), 360
 CHAR option
 COLUMNS statement (COMPUTAB), 470
 ROWS statement (COMPUTAB), 472
 CHARTS= option
 MONTHLY statement (X11), 2414
 QUARTERLY statement (X11), 2419
 CHECK statement
 X12 procedure, 2489
 CHECKBREAK option
 LEVEL statement (UCM), 2135

- CHICR= option
 - ARIMA statement (X11), 2410
- CHISQUARED option
 - ERRORMODEL statement (MODEL), 1060
- CHOICE= option
 - MODEL statement (MDC), 966
- CHOW= option
 - FIT statement (MODEL), 1069, 1159
 - MODEL statement (AUTOREG), 348
- CLAG option
 - LAG statement (PANEL), 1351
- CLAG statement
 - LAG statement (PANEL), 1351
- CLASS statement
 - MDC procedure, 966
 - PANEL procedure, 1348
- CLEAR option
 - IDENTIFY statement (ARIMA), 231
- CLIMIT= option
 - FORECAST command (TSFS), 2988
- CLUSTER option
 - Model statement (PANEL), 1353
- CMPMODEL options, 1052
- COEF option
 - MODEL statement (AUTOREG), 349
 - MODEL statement (PDLREG), 1431
 - PROC SPECTRA statement, 1744
- COEF= option
 - HETERO statement (AUTOREG), 358
- COINTEG statement
 - VARMAX procedure, 2253, 2336
- COINTTEST= option
 - MODEL statement (VARMAX), 2266
- COINTTEST=(JOHANSEN) option
 - MODEL statement (VARMAX), 2266
- COINTTEST=(JOHANSEN=(IORDER=)) option
 - MODEL statement (VARMAX), 2267, 2343
- COINTTEST=(JOHANSEN=(NORMALIZE=)) option
 - MODEL statement (VARMAX), 2267, 2329
- COINTTEST=(JOHANSEN=(TYPE=)) option
 - MODEL statement (VARMAX), 2267
- COINTTEST=(SIGLEVEL=) option
 - MODEL statement (VARMAX), 2267
- COINTTEST=(SW) option
 - MODEL statement (VARMAX), 2268, 2324
- COINTTEST=(SW=(LAG=)) option
 - MODEL statement (VARMAX), 2268
- COINTTEST=(SW=(TYPE=)) option
 - MODEL statement (VARMAX), 2268
- COLLIN option
 - ENTROPY procedure, 714
 - FIT statement (MODEL), 1069
- 'column headings' option
 - COLUMNS statement (COMPUTAB), 470
- COLUMNS statement
 - COMPUTAB procedure, 469
- COMPARE statement
 - LOAN procedure, 922
- COMPONENT statement
 - SSM procedure, 1777
- COMPOUND= option
 - FIXED statement (LOAN), 916
- COMPRESS= option
 - TARGET statement (SIMILARITY), 1656
- COMPUTAB procedure, 466
 - syntax, 466
- CONDITIONAL
 - OUTPUT statement (QLIM), 1467
- CONST= option
 - BOXCOXAR macro, 155
 - LOGTEST macro, 160
- CONSTANT= option
 - OUTPUT statement (AUTOREG), 360
 - OUTPUT statement (PDLREG), 1433
- CONTROL, 1282
- CONTROL statement
 - MODEL procedure, 1059, 1228
- CONVERGE= option
 - ARIMA statement (X11), 2410
 - ENTROPY procedure, 716
 - ESTIMATE statement (ARIMA), 237
 - FIT statement (MODEL), 1071, 1107, 1115, 1117
 - MODEL statement (AUTOREG), 356
 - MODEL statement (MDC), 967
 - MODEL statement (PDLREG), 1431
 - PROC SYSLIN statement, 1898
 - SOLVE statement (MODEL), 1083
- CONVERT statement
 - EXPAND procedure, 804
- CONVERT= option
 - LIBNAME statement (SASEFAME), 2721
- COPULA procedure, 511, 516
 - BY Statement, 518
 - DEFINE statement, 519
 - FIT Statement, 519
 - PROC COPULA statement, 518
 - SIMULATE statement, 521
 - syntax, 516
 - VAR Statement, 523
- COPULA= option
 - SOLVE statement (MODEL), 1082
- CORR option
 - FIT statement (MODEL), 1070
 - MODEL statement (PANEL), 1353
 - MODEL statement (TSCSREG), 2100
- CORR statement

- TIMESERIES procedure, 2033
- CORRB option
 - ESTIMATE statement (MODEL), 1062
 - FIT statement (MODEL), 1070
 - MODEL statement, 565, 1951
 - MODEL statement (AUTOREG), 349
 - MODEL statement (MDC), 970
 - MODEL statement (PANEL), 1353
 - MODEL statement (PDLREG), 1431
 - MODEL statement (SYSLIN), 1901
 - MODEL statement (TSCSREG), 2100
 - PROC COUNTREG statement, 562
 - PROC TCOUNTREG statement, 1947
 - QLIM procedure, 1459
- CORROUT option
 - PROC PANEL statement, 1346
 - PROC QLIM statement, 1459
 - PROC TSCSREG statement, 2098
- CORRS option
 - FIT statement (MODEL), 1070
- COS function, 1235
- COSH function, 1236
- COST option
 - ENDOGENOUS statement (QLIM), 1463
- COUNTREG procedure, 559
 - syntax, 559
- COUNTREG procedure, CLASS statement, 564
- COUNTREG procedure, FREQ statement, 564
- COUNTREG procedure, WEIGHT statement, 568
- COV option
 - FIT statement (MODEL), 1070
- COV3OUT option
 - PROC SYSLIN statement, 1897
- COVB option
 - ESTIMATE statement (MODEL), 1062
 - FIT statement (MODEL), 1070
 - MODEL statement, 565, 1951
 - MODEL statement (AUTOREG), 349
 - MODEL statement (MDC), 970
 - MODEL statement (PANEL), 1353
 - MODEL statement (PDLREG), 1431
 - MODEL statement (SYSLIN), 1901
 - MODEL statement (TSCSREG), 2100
 - PROC COUNTREG statement, 562
 - PROC STATESPACE statement, 1846
 - PROC TCOUNTREG statement, 1947
 - QLIM procedure, 1459
- COVBEST= option
 - ENTROPY procedure, 714
 - FIT statement (MODEL), 1064, 1100
- COVEST= option
 - MODEL statement (AUTOREG), 349
 - MODEL statement (MDC), 970
 - PROC COUNTREG statement, 562
 - PROC TCOUNTREG statement, 1947
 - QLIM procedure, 1459
- COVOUT option
 - ENTROPY procedure, 715
 - FIT statement (MODEL), 1068
 - PROC AUTOREG statement, 342
 - PROC COUNTREG statement, 562
 - PROC MDC statement, 964
 - PROC PANEL statement, 1346
 - PROC QLIM statement, 1459
 - PROC SEVERITY statement, 1539
 - PROC SYSLIN statement, 1897
 - PROC TCOUNTREG statement, 1946
 - PROC TSCSREG statement, 2098
- COVS option
 - FIT statement (MODEL), 1070, 1105
- CPEV= option
 - OUTPUT statement (AUTOREG), 360
- CRITERION= option
 - PROC SEVERITY statement, 1543
- CROSS option
 - PROC SPECTRA statement, 1744
- CROSSCORR statement
 - TIMESERIES procedure, 2035
- CROSSCORR= option
 - IDENTIFY statement (ARIMA), 231
- CROSSLIST= option
 - LIBNAME statement (SASEFAME), 2725
- CROSSPLOTS= option
 - PROC TIMESERIES statement, 2029
- CROSSVAR statement
 - TIMESERIES procedure, 2047
- CRSPLINKPATH= option
 - LIBNAME statement (SASECRSP), 2589
- CSPACE= option
 - PROC COMPUTAB statement, 469
- CSTART= option
 - PROC FORECAST statement, 864
- CUSIP= option
 - LIBNAME statement (SASECRSP), 2587
- CUSUM= option
 - OUTPUT statement (AUTOREG), 361
- CUSUMLB= option
 - OUTPUT statement (AUTOREG), 361
- CUSUMSQ= option
 - OUTPUT statement (AUTOREG), 361
- CUSUMSQLB= option
 - OUTPUT statement (AUTOREG), 361
- CUSUMSQUB= option
 - OUTPUT statement (AUTOREG), 361
- CUSUMUB= option
 - OUTPUT statement (AUTOREG), 361
- CUTOFF= option
 - SSPAN statement (X11), 2421

- CV= option
 - OUTLIER statement (X12), 2496
- CWIDTH= option
 - PROC COMPUTAB statement, 469
- CYCLE statement
 - UCM procedure, 2124
- D**
- DASILVA option
 - MODEL statement (PANEL), 1353
 - MODEL statement (TSCSREG), 2101
- DATA Step
 - IF Statement, 71
 - WHERE Statement, 71
- DATA step
 - DROP statement, 72
 - KEEP statement, 72
- DATA= option
 - ENTROPY procedure, 714
 - FIT statement (MODEL), 1067, 1182
 - FORECAST command (TSFS), 2986, 2987
 - IDENTIFY statement (ARIMA), 231
 - PROC ARIMA statement, 227
 - PROC AUTOREG statement, 342
 - PROC COMPUTAB statement, 468
 - PROC COUNTREG statement, 561
 - PROC ESM statement, 758
 - PROC EXPAND statement, 801
 - PROC FORECAST statement, 864
 - PROC MDC statement, 964
 - PROC MODEL statement, 1050
 - PROC PANEL statement, 1346
 - PROC PDLREG statement, 1429
 - PROC QLIM statement, 1459
 - PROC SEVERITY statement, 1539, 1542
 - PROC SIMILARITY statement, 1648
 - PROC SIMLIN statement, 1713, 1720
 - PROC SPECTRA statement, 1744
 - PROC SSM statement, 1777
 - PROC STATESPACE statement, 1844
 - PROC SYSLIN statement, 1897
 - PROC TCOUNTREG statement, 1946
 - PROC TIMEID statement, 2000
 - PROC TIMESERIES statement, 2029
 - PROC TSCSREG statement, 2098
 - PROC UCM statement, 2118
 - PROC VARMAX statement, 2249
 - PROC X11 statement, 2408
 - PROC X12 statement, 2478
 - SOLVE statement (MODEL), 1080, 1228
 - TSVIEW command (TSFS), 2986, 2987
- DATASOURCE procedure, 615
 - syntax, 615
- DATE
 - function, 146
- DATE= option
 - MONTHLY statement (X11), 2414
 - PROC X12 statement, 2478
 - QUARTERLY statement (X11), 2419
- DATEJUL
 - function, 94
- DATEJUL function, 146
- DATEPART function, 95, 146
- DATETIME
 - function, 146
- DAY
 - function, 94, 146
- DBNAME= option
 - PROC DATASOURCE statement, 617
- DBTYPE= option
 - PROC DATASOURCE statement, 617
- DBVERSION= option
 - LIBNAME statement (SASEFAME), 2725
- DECOMP statement
 - TIMESERIES procedure, 2036
- DEFINE statement
 - COPULA procedure, 519
- DEGREE= option
 - SPLINEREG statement (UCM), 2142
 - SPLINESEASON statement (UCM), 2143
- DELETMODEL statement
 - MODEL procedure, 1059
- DELTA= option
 - ESTIMATE statement (ARIMA), 237
- DEPLAG statement
 - UCM procedure, 2125
- DETAILS option
 - FIT statement (MODEL), 1125
 - PROC MODEL statement, 1053
- DETTOL= option
 - PROC STATESPACE statement, 1846
- DFPVALUE
 - macro, 157
 - macro variable, 157, 159
- DFTEST
 - macro, 158
- DFTEST option
 - MODEL statement (VARMAX), 2266, 2365
- DFTEST=(DLAG=) option
 - MODEL statement (VARMAX), 2266
- DHMS
 - function, 95
- DHMS function, 146
- DIAG= option
 - FORECAST command (TSFS), 2989
- DIF
 - function, 103

DIF function
 MODEL procedure, 106
 DIF= option
 BOXCOXAR macro, 155
 DFTEST macro, 159
 INPUT statement (SIMILARITY), 1654
 LOGTEST macro, 160
 MODEL statement (VARMAX), 2257
 TARGET statement (SIMILARITY), 1658
 VAR statement (TIMESERIES), 2047
 DIFF= option
 IDENTIFY statement (X12), 2495
 DIFFORDER= option
 AUTOMDL statement (X12), 2487
 DIFX= option
 MODEL statement (VARMAX), 2257
 DIFY= option
 MODEL statement (VARMAX), 2257, 2377
 DIMMAX= option
 PROC STATESPACE statement, 1845
 DISCRETE option
 ENDOGENOUS statement (QLIM), 1462
 DIST statement
 SEVERITY procedure, 1549
 DIST= option
 COUNTREG statement (COUNTREG), 565
 MODEL statement (AUTOREG), 345
 MODEL statement (COUNTREG), 565
 MODEL statement (TCOUNTREG), 1950
 TCOUNTREG statement (TCOUNTREG), 1950
 DISTRIBUTION= option
 ENDOGENOUS statement (QLIM), 1462
 DLAG= option
 DFPVALUE macro, 157
 DFTEST macro, 159
 DO, 1240
 DOL option
 ROWS statement (COMPUTAB), 472
 DOWNPAYMENT= option
 FIXED statement (LOAN), 916
 DOWNPAYPCT= option
 FIXED statement (LOAN), 916
 DP= option
 FIXED statement (LOAN), 916
 DPCT= option
 FIXED statement (LOAN), 916
 DROP statement
 DATASOURCE procedure, 620
 DROP= option
 FIT statement (MODEL), 1064
 LIBNAME statement (SASEHAVR), 2773
 DROPEVENT statement
 DATASOURCE procedure, 621
 DROPGEOG1= option

 LIBNAME statement (SASEHAVR), 2774
 DROPGEOG2= option
 LIBNAME statement (SASEHAVR), 2775
 DROPGROUP= option
 LIBNAME statement (SASEHAVR), 2774
 DROPH= option
 SEASON statement (UCM), 2139
 DROPLONG= option
 LIBNAME statement (SASEHAVR), 2774
 DROPSHORT= option
 LIBNAME statement (SASEHAVR), 2774
 DROPSOURCE= option
 LIBNAME statement (SASEHAVR), 2774
 DUAL option
 ENTROPY procedure, 716
 DUL option
 ROWS statement (COMPUTAB), 472
 DUPLICATES option
 TIMEID procedure, 2002
 DW option
 FIT statement (MODEL), 1070
 MODEL statement (SYSLIN), 1901
 DW= option
 MODEL statement (AUTOREG), 349
 MODEL statement (PDLREG), 1431
 DWPROB option
 FIT statement (MODEL), 1070
 MODEL statement (AUTOREG), 349
 MODEL statement (PDLREG), 1431
 DYNAMIC option
 FIT statement (MODEL), 1065, 1148, 1150
 SOLVE statement (MODEL), 1081, 1146, 1194

E

EBCDIC option
 PROC DATASOURCE statement, 617
 ECM= option
 MODEL statement (VARMAX), 2270
 ECM=(ECTREND) option
 MODEL statement (VARMAX), 2270, 2333
 ECM=(NORMALIZE=) option
 MODEL statement (VARMAX), 2234, 2270
 ECM=(RANK=) option
 MODEL statement (VARMAX), 2234, 2270
 EDF=AUTO option
 PROC SEVERITY statement, 1544
 EDF=KAPLANMEIER option
 PROC SEVERITY statement, 1544
 EDF=MODIFIEDKM option
 PROC SEVERITY statement, 1544
 EDF=STANDARD option
 PROC SEVERITY statement, 1544
 EDF=TURNBULL option

PROC SEVERITY statement, 1544
 Empirical Distribution Estimation
 ERRORMODEL statement (MODEL), 1102
 EMPIRICAL= option
 ERRORMODEL statement (MODEL), 1061
 EMPIRICALCDF= option
 PROC SEVERITY statement, 1543
 END= option
 ID statement (ESM), 765
 ID statement (SIMILARITY), 1652
 ID statement (TIMESERIES), 2039
 LIBNAME statement (SASEHAVR), 2773
 MONTHLY statement (X11), 2414
 QUARTERLY statement (X11), 2419
 ENDOGENOUS statement
 MODEL procedure, 1059, 1228
 SIMLIN procedure, 1714
 SYSLIN procedure, 1900
 ENSUREMLE option
 PROC SEVERITY statement, 1545
 ENTROPY procedure, 712
 syntax, 712
 ENTRY= option
 FORECAST command (TSFS), 2988
 EPS= option
 PROC SEVERITY statement, 1545
 EPSILON = option
 FIT statement (MODEL), 1072
 ERRORCOMP= option
 MODEL statement (TCOUNTREG), 1950
 TCOUNTREG statement (TCOUNTREG), 1950
 ERRORMODEL statement
 MODEL procedure, 1060
 ERRSTD
 OUTPUT statement (QLIM), 1467
 ESACF option
 IDENTIFY statement (ARIMA), 231
 ESM, 753
 ESM procedure, 756
 syntax, 756
 EST= option
 PROC SIMLIN statement, 1713, 1719
 ESTDATA= option
 FIT statement (MODEL), 1067, 1182
 SOLVE statement (MODEL), 1080, 1198, 1226
 ESTIMATE statement
 ARIMA procedure, 234
 MODEL procedure, 1061
 UCM procedure, 2126
 X12 procedure, 2490
 ESTIMATEDCASE= option
 ARM statement (LOAN), 921
 ESTPRINT option
 PROC SIMLIN statement, 1713

ESUPPORTS= option
 MODEL statement (ENTROPY), 720
 EVAL statement
 SSM procedure, 1778
 EVENT statement
 X12 procedure, 2491
 EXCLUDE= option
 FIT statement (MODEL), 1164
 INSTRUMENTS statement (MODEL), 1074
 MONTHLY statement (X11), 2415
 EXOGENEITY option
 COINTEG statement (VARMAX), 2254, 2339
 EXOGENOUS statement
 MODEL procedure, 1063, 1228
 SIMLIN procedure, 1715
 EXP function, 1236
 EXPAND procedure, 799
 CONVERT statement, 813
 syntax, 799
 EXPAND= option
 TARGET statement (SIMILARITY), 1658
 EXPECTED
 OUTPUT statement (QLIM), 1467
 EXTRADIFFUSE= option
 ESTIMATE statement (UCM), 2127
 FORECAST statement (UCM), 2130
 EXTRAPOLATE option
 PROC EXPAND statement, 802

F

F option
 ERRORMODEL statement (MODEL), 1060
 FACTOR= option
 PROC EXPAND statement, 801, 805, 806
 FAMEOUT= option
 LIBNAME statement (SASEFAME), 2725
 FAMEPRINT option
 PROC DATASOURCE statement, 617
 FCMPOPT statement
 SIMILARITY procedure, 1651
 FILETYPE= option
 PROC DATASOURCE statement, 617
 FIML option
 FIT statement (MODEL), 1065, 1099, 1183, 1287
 PROC SYSLIN statement, 1898
 FINAL= option
 X11 statement (X12), 2509
 FIRST option
 PROC SYSLIN statement, 1899
 FIT Statement
 COPULA procedure, 519
 FIT statement

MODEL procedure, 1063
 FIT statement, MODEL procedure
 GINV= option, 1065
 FIXED statement
 LOAN procedure, 915
 FIXEDCASE option
 ARM statement (LOAN), 921
 FIXONE option
 MODEL statement (PANEL), 1353
 MODEL statement (TSCSREG), 2100
 FIXONETIME option
 MODEL statement (PANEL), 1353
 FIXTWO option
 MODEL statement (PANEL), 1353
 MODEL statement (TSCSREG), 2100
 FLATDATA statement
 PANEL procedure, 1348
 FLOW option
 PROC MODEL statement, 1053
 FORCE= option
 X11 statement (X12), 2509
 FORCE=FREQ option
 LIBNAME statement (SASEHAVR), 2775
 FORECAST
 macro, 2987
 FORECAST option
 SOLVE statement (MODEL), 1082, 1194, 1197
 FORECAST procedure, 861
 syntax, 861
 FORECAST statement
 ARIMA procedure, 240
 ESM procedure, 761
 SSM procedure, 1778
 UCM procedure, 2129
 X12 procedure, 2492
 FORECAST= option
 ARIMA statement (X11), 2410
 FORM statement
 STATSPACE procedure, 1848
 FORM= option
 GARCH statement, 2271
 FORMAT statement
 DATASOURCE procedure, 624
 FORMAT= option
 ATTRIBUTE statement (DATASOURCE), 624
 COLUMNS statement (COMPUTAB), 471
 ID statement (ESM), 765
 ID statement (SIMILARITY), 1653
 ID statement (TIMESERIES), 2039
 ROWS statement (COMPUTAB), 473
 TIMEID procedure, 2002
 FREQ= option
 LIBNAME statement (SASEHAVR), 2773
 PROC TIMEID statement, 2000

FREQUENCY= option
 PROC DATASOURCE statement, 618
 FROM= option
 PROC EXPAND statement, 801, 805, 806
 FRONTIER option
 ENDOGENOUS statement (QLIM), 1463
 FSRSQ option
 FIT statement (MODEL), 1070, 1089, 1165
 FULLER option
 MODEL statement (TSCSREG), 2101
 FULLWEIGHT= option
 MONTHLY statement (X11), 2415
 QUARTERLY statement (X11), 2419
 FUNCTION= option
 TRANSFORM statement (X12), 2506
 FUZZ= option
 PROC COMPUTAB statement, 468

G

GARCH statement
 VARMAX procedure, 2271
 GARCH= option
 MODEL statement (AUTOREG), 345
 GCE option
 ENTROPY procedure, 714
 GCEM option
 ENTROPY procedure, 714
 GCONV= option
 ENTROPY procedure, 716
 GENERAL= option
 ERRORMODEL statement (MODEL), 1060
 GENGMV option
 FIT statement (MODEL), 1065
 GEOG1= option
 LIBNAME statement (SASEHAVR), 2774
 GEOG2= option
 LIBNAME statement (SASEHAVR), 2775
 GETDER function, 1235
 GINV option
 MODEL statement (AUTOREG), 349
 MODEL statement (PDLREG), 1431
 GINV= option
 FIT statement (MODEL), 1065
 MODEL statement (PANEL), 1353
 GME option
 ENTROPY procedure, 714
 GMED option
 ENTROPY procedure, 714
 GMEM option
 ENTROPY procedure, 714
 GMM option
 FIT statement (MODEL), 1065, 1091, 1132,
 1183, 1185, 1186, 1188

MODEL statement (PANEL), 1353
 GODFREY option
 FIT statement (MODEL), 1070
 MODEL statement (AUTOREG), 349
 GRAPH option
 PROC MODEL statement, 1052, 1255
 GRID option
 ESTIMATE statement (ARIMA), 237
 GRIDVAL= option
 ESTIMATE statement (ARIMA), 238
 GROUP1 option
 CAUSAL statement (VARMAX), 2253
 GROUP2 option
 CAUSAL statement (VARMAX), 2253
 GROUP= option
 LIBNAME statement (SASEHAVR), 2773
 GROUPS option
 SSA statement (TIMESERIES), 2044
 GVKEY= option
 LIBNAME statement (SASECRSP), 2586
 LIBNAME statement (SASEXCCM), 2681

H

H= option
 COINTEG statement (VARMAX), 2254, 2336
 HALTONSTART= option
 MODEL statement (MDC), 967
 HAUSMAN option
 FIT statement (MODEL), 1071, 1158
 HCCME= option
 FIT statement (MODEL), 1065
 MODEL statement (PANEL), 1354
 HCUSIP= option
 LIBNAME statement (SASECRSP), 2587
 HESSIAN= option
 FIT statement (MODEL), 1072, 1100
 HETERO statement
 AUTOREG procedure, 357
 HEV option
 MODEL statement (MDC), 967
 HMS
 function, 95
 HMS function, 146
 HOLIDAY function, 146
 HORIZON= option
 FORECAST command (TSFS), 2988
 HOUR
 function, 146
 HRINITIAL option
 AUTOMDL statement (X12), 2487
 HT= option
 OUTPUT statement (AUTOREG), 360

I

I option
 FIT statement (MODEL), 1071, 1121
 MODEL statement (PDLREG), 1431
 MODEL statement (SYSLIN), 1901
 ID statement
 ENTROPY procedure, 719
 ESM procedure, 763
 EXPAND procedure, 805
 FORECAST procedure, 868
 MDC procedure, 966
 MODEL procedure, 1073
 PANEL procedure, 1349
 SIMILARITY procedure, 1651
 SIMLIN procedure, 1715
 SSM procedure, 1779
 STATESPACE procedure, 1848
 TIMEID procedure, 2001
 TIMESERIES procedure, 2038
 TSCSREG procedure, 2099
 UCM procedure, 2131
 VARMAX procedure, 2255
 X11 procedure, 2412
 X12 procedure, 2494
 ID statement, TCOUNTREG procedure, 1949
 ID= option
 FORECAST command (TSFS), 2986, 2987
 FORECAST statement (ARIMA), 240
 OUTLIER statement (ARIMA), 239
 TSVIEW command (TSFS), 2986, 2987
 IDENTIFY statement
 ARIMA procedure, 230, 238
 X12 procedure, 2494
 IDENTITY statement
 SYSLIN procedure, 1900
 IF, 1241
 INCLUDE, 1244
 INCLUDE statement
 MODEL procedure, 1073
 INDEX option
 PROC DATASOURCE statement, 617
 INDID = option
 PROC PANEL statement, 1348
 INDNO= option
 LIBNAME statement (SASECRSP), 2588
 LIBNAME statement (SASEXCCM), 2682
 INEST= option
 PROC SEVERITY statement, 1539
 INEVENT= option
 PROC X12 statement, 2478
 INFILE= option
 PROC DATASOURCE statement, 617
 INIT statement

- COMPUTAB procedure, 473
- COUNTREG procedure, 564
- QLIM procedure, 1465
- TCOUNTREG procedure, 1949
- INIT= option
 - DIST statement, 1549
 - FIXED statement (LOAN), 917
- INITIAL statement
 - STATESPACE procedure, 1848
- INITIAL= option
 - FIT statement (MODEL), 1064, 1150
 - FIXED statement (LOAN), 917
 - MODEL statement (AUTOREG), 356
 - MODEL statement (MDC), 971
- INITIALPCT= option
 - FIXED statement (LOAN), 917
- INITMISS option
 - PROC COMPUTAB statement, 468
- INITPCT= option
 - FIXED statement (LOAN), 917
- INITVAL= option
 - ESTIMATE statement (ARIMA), 237
- INPUT statement
 - SIMILARITY procedure, 1654
 - X12 procedure, 2495
- INPUT= option
 - ESTIMATE statement (ARIMA), 234, 255
- INSET= option
 - LIBNAME statement (SASECRSP), 2590
 - LIBNAME statement (SASEFAME), 2723, 2724
- INSTRUMENTS statement
 - MODEL procedure, 1073, 1162
 - SYSLIN procedure, 1901
- INTCINDEX function, 146
- INTCK
 - function, 97
- INTCK function, 146
- INTCYCLE function, 147
- INTEGRATE= option
 - MODEL statement (MDC), 967
- INTERIM= option
 - PROC SIMLIN statement, 1713
- INTERVAL= option
 - FORECAST command (TSFS), 2986, 2987
 - FORECAST statement (ARIMA), 240, 261
 - ID statement (ESM), 765
 - ID statement (SIMILARITY), 1653
 - ID statement (SSM), 1779
 - ID statement (TIMESERIES), 2039
 - ID statement (UCM), 2131
 - ID statement (VARMAX), 2256
 - PROC DATASOURCE statement, 618
 - PROC FORECAST statement, 864
 - PROC STATESPACE statement, 1847
 - PROC X12 statement, 2478
 - TIMEID procedure, 2002
 - TSVIEW command (TSFS), 2986, 2987
- INTERVAL=option
 - FIXED statement (LOAN), 917
- INTFIT function, 147
- INTFMT function, 147
- INTGET function, 147
- INTGPRINT option
 - SOLVE statement (MODEL), 1084
- INTINDEX function, 148
- INTNX
 - function, 96
- INTNX function, 148
- INTONLY option
 - INSTRUMENTS statement (MODEL), 1075
- INTORDER= option
 - MODEL statement (MDC), 967
- INTPER= option
 - PROC FORECAST statement, 864
 - PROC STATESPACE statement, 1847
- INTSEAS function, 149
- INTSHIFT function, 149
- INTTEST function, 149
- IRREGULAR statement
 - SSM procedure, 1779
 - UCM procedure, 2132
- IT2SLS option
 - FIT statement (MODEL), 1066
- IT3SLS option
 - FIT statement (MODEL), 1066
 - PROC SYSLIN statement, 1898
- ITALL option
 - FIT statement (MODEL), 1071, 1122
- ITDETAILS option
 - FIT statement (MODEL), 1071, 1121
- ITEMLIST= option
 - LIBNAME statement (SASEXCCM), 2683
- ITGMM option
 - FIT statement (MODEL), 1065, 1094
 - MODEL statement (PANEL), 1354
- ITOLS option
 - FIT statement (MODEL), 1065
- ITPRINT option
 - ENTROPY procedure, 715
 - ESTIMATE statement (X12), 2491
 - FIT statement (MODEL), 1071, 1114, 1120
 - MODEL statement, 566, 1951
 - MODEL statement (AUTOREG), 349
 - MODEL statement (MDC), 970
 - MODEL statement (PANEL), 1354
 - MODEL statement (PDLREG), 1431
 - PROC COPULA statement, 521
 - PROC STATESPACE statement, 1846

PROC SYSLIN statement, 1899
 QLIM procedure, 1459
 SOLVE statement (MODEL), 1084, 1222
 ITSUR option
 FIT statement (MODEL), 1066, 1090
 PROC SYSLIN statement, 1898
J
 J= option
 COINTEG statement (VARMAX), 2255
 JACOBI option
 SOLVE statement (MODEL), 1082
 JULDATE function, 94, 149
K
 K option
 PROC SPECTRA statement, 1744
 K= option
 MODEL statement (SYSLIN), 1902
 PROC SYSLIN statement, 1898
 KEEP = option
 PROC PANEL statement, 1349
 KEEP statement
 DATASOURCE procedure, 619
 KEEP= option
 FORECAST command (TSFS), 2989
 LIBNAME statement (SASEHAVR), 2773
 KEEPEVENT statement
 DATASOURCE procedure, 621
 KEEPH= option
 SEASON statement (UCM), 2139
 KERNEL option
 FIT statement (MODEL), 1185
 SPECTRA statement (TIMESERIES), 2042
 KERNEL= option
 FIT statement (MODEL), 1066, 1092
 KLAG= option
 PROC STATESPACE statement, 1846
 KNOTS= option
 SPLINEREG statement (UCM), 2142
 SPLINESEASON statement (UCM), 2143
L
 L= option
 FIXED statement (LOAN), 915
 LABEL option
 COLUMNS statement (COMPUTAB), 470
 ROWS statement (COMPUTAB), 472
 LABEL statement
 DATASOURCE procedure, 625
 MODEL procedure, 1075

LABEL= option
 ATTRIBUTE statement (DATASOURCE), 624
 FIXED statement (LOAN), 917
 LAG
 function, 103
 LAG function
 MODEL procedure, 106
 LAG statement
 PANEL procedure, 1351
 LAGDEP option
 MODEL statement (AUTOREG), 349
 MODEL statement (PDLREG), 1431
 LAGDEP= option
 MODEL statement (AUTOREG), 350
 MODEL statement (PDLREG), 1431
 LAGDV option
 MODEL statement (AUTOREG), 349
 MODEL statement (PDLREG), 1431
 LAGDV= option
 MODEL statement (AUTOREG), 350
 MODEL statement (PDLREG), 1431
 LAGGED statement
 SIMLIN procedure, 1715
 LAGMAX= option
 MODEL statement (VARMAX), 2259
 PROC STATESPACE statement, 1844
 LAGRANGE option
 TEST statement (ENTROPY), 723
 TEST statement (MODEL), 1085
 LAGS= option
 CORR statement (TIMESERIES), 2034
 CROSSCORR statement (TIMESERIES), 2035
 DEPLAG statement (UCM), 2126
 LAMBDA= option
 DECOMP statement (TIMESERIES), 2037
 LAMBDAHI= option
 BOXCOXAR macro, 155
 LAMBDALO= option
 BOXCOXAR macro, 155
 LCL= option
 OUTPUT statement (AUTOREG), 361
 OUTPUT statement (PDLREG), 1433
 LCLM= option
 OUTPUT statement (AUTOREG), 361
 OUTPUT statement (PDLREG), 1433
 LDW option
 MODEL statement (AUTOREG), 357
 LEAD= option
 FORECAST statement (ARIMA), 241
 FORECAST statement (UCM), 2130
 FORECAST statement (X12), 2493
 OUTPUT statement (VARMAX), 2273
 PROC ESM statement, 758
 PROC FORECAST statement, 864

PROC STATESPACE statement, 1847
 LEFTCENSORED= option
 LOSS statement, 1546
 LEFTTRUNCATED= option
 LOSS statement, 1546
 LENGTH
 SSA statement (TIMESERIES), 2044
 LENGTH option
 MONTHLY statement (X11), 2415
 LENGTH statement
 DATASOURCE procedure, 625
 LENGTH= option
 ATTRIBUTE statement (DATASOURCE), 624
 SEASON statement (UCM), 2139
 SPLINESEASON statement (UCM), 2143
 LEVEL statement
 UCM procedure, 2135
 LIBNAME libref SASECRSP statement, 2583
 LIBNAME libref SASEXCCM statement, 2680
 LIFE= option
 FIXED statement (LOAN), 915
 LIKE option
 TEST statement (ENTROPY), 723
 TEST statement (MODEL), 1085
 LIMIT1= option
 MODEL statement (QLIM), 1466
 LIML option
 PROC SYSLIN statement, 1898
 LINK= option
 HETERO statement (AUTOREG), 358
 LIST option
 FIT statement (MODEL), 1274
 PROC MODEL statement, 1052, 1246
 LISTALL option
 PROC MODEL statement, 1052
 LISTCODE option
 PROC MODEL statement, 1052, 1247
 LISTDEP option
 PROC MODEL statement, 1052, 1251
 LISTDER option
 PROC MODEL statement, 1053
 LJC option
 COLUMNS statement (COMPUTAB), 471
 ROWS statement (COMPUTAB), 473
 LJUNGBOXLIMIT= option
 AUTOMDL statement (X12), 2487
 LM option
 TEST statement (ENTROPY), 723
 TEST statement (MDC), 977
 TEST statement (MODEL), 1085
 TEST statement (PANEL), 1357
 TEST statement (QLIM), 1469
 LOAN procedure, 912
 syntax, 912

LOG function, 1236
 LOG10 function, 1236
 LOG2 function, 1236
 LOGLIKL option
 MODEL statement (AUTOREG), 350
 LOGNORMALPARM= option
 MODEL statement (MDC), 967
 LOGTEST
 macro, 160
 macro variable, 161
 LONG= option
 LIBNAME statement (SASEHAVR), 2774
 LOSS statement
 SEVERITY procedure, 1546
 LOWERBOUND= option
 ENDOGENOUS statement (QLIM), 1463
 LR option
 TEST statement (ENTROPY), 723
 TEST statement (MDC), 977
 TEST statement (MODEL), 1085
 TEST statement (PANEL), 1357
 TEST statement (QLIM), 1469
 LRECL= option
 PROC DATASOURCE statement, 617
 LSCV= option
 OUTLIER statement (X12), 2497
 LTEBOUND= option
 FIT statement (MODEL), 1072, 1224
 MODEL statement (MODEL), 1224
 SOLVE statement (MODEL), 1224

M

M= option
 MODEL statement (PANEL), 1354
 MODEL statement (TSCSREG), 2101
 %MA macro, 1178, 1179
 MA= option
 ESTIMATE statement (ARIMA), 237
 MACURVES statement
 X11 procedure, 2413
 MAPECR= option
 ARIMA statement (X11), 2410
 MARGINAL
 OUTPUT statement (QLIM), 1467
 MARGINALS option
 MODEL statement (ENTROPY), 720
 MARKOV option
 ENTROPY procedure, 714
 MARR= option
 COMPARE statement (LOAN), 923
 MAXAD= option
 ARM statement (LOAN), 920
 MAXADJUST= option

- ARM statement (LOAN), 920
- MAXBAND= option
 - MODEL statement (PANEL), 1354
- MAXDIFF= option
 - AUTOMDL statement (X12), 2487
- MAXERROR= option
 - PROC ESM statement, 758
 - PROC TIMEID statement, 2000
 - PROC TIMESERIES statement, 2030
- MAXERRORS= option
 - PROC FORECAST statement, 864
 - PROC MODEL statement, 1053
- MAXIT=
 - PROC SYSLIN statement, 1898
- MAXIT= option
 - ESTIMATE statement (ARIMA), 238
 - PROC STATESPACE statement, 1846
- MAXITER= option
 - ARIMA statement (X11), 2410
 - ENTROPY procedure, 716
 - ESTIMATE statement (ARIMA), 238
 - ESTIMATE statement (X12), 2491
 - FIT statement (MODEL), 1072
 - MODEL statement (AUTOREG), 357
 - MODEL statement (MDC), 971
 - MODEL statement (PANEL), 1354
 - MODEL statement (PDLREG), 1431
 - PROC SEVERITY statement, 1545
 - PROC SYSLIN statement, 1898
 - SOLVE statement (MODEL), 1083
- MAXLAG= option
 - CHECK statement (X12), 2489
 - IDENTIFY statement (X12), 2495
- MAXNUM= option
 - OUTLIER statement (ARIMA), 239
 - OUTLIER statement (UCM), 2137
- MAXORDER= option
 - AUTOMDL statement (X12), 2487
- MAXPCT= option
 - OUTLIER statement (ARIMA), 239
 - OUTLIER statement (UCM), 2137
- MAXR= option
 - ARM statement (LOAN), 920
- MAXRATE= option
 - ARM statement (LOAN), 920
- MAXSUBITER= option
 - ENTROPY procedure, 716
 - FIT statement (MODEL), 1072, 1107
 - SOLVE statement (MODEL), 1083
- MDC procedure, 962
 - syntax, 962
- MDC procedure, MODEL statement
 - ADDMAXIT= option, 969
 - ADDRANDOM option, 969
- ADDVALUE option, 969
- ALL option, 970
- CHOICE= option, 966
- CONVERGE= option, 967
- CORRB option, 970
- COVB option, 970
- COVEST= option, 970
- HALTONSTART= option, 967
- HEV= option, 967
- INITIAL= option, 971
- ITPRINT option, 970
- LOGNORMALPARM= option, 967
- MAXITER= option, 971
- MIXED= option, 967
- NCHOICE option, 968
- NOPRINT option, 970
- NORMALEC= option, 967
- NORMALPARM= option, 967
- NSIMUL option, 968
- OPTMETHOD= option, 971
- RANDINIT option, 968
- RANDNUM= option, 968
- RANK option, 968
- RESTART= option, 968
- SAMESCALE option, 969
- SEED= option, 969
- SPSCALE option, 969
- TYPE= option, 969
- UNIFORMEC= option, 968
- UNIFORMPARM= option, 968
- UNITVARIANCE= option, 970
- MDC procedure, OUTPUT statement
 - OUT= option, 975
 - P= option, 976
 - XBETA= option, 976
- MDC procedure, PROC MDC statement
 - COVOUT option, 964
 - DATA= option, 964
 - OUTEST= option, 964
- MDC procedure, TEST statement, 977
- MDCDATA statement, 964
- MDLINFOIN= option
 - PROC X12 statement, 2478
- MDLINFOOUT= option
 - PROC X12 statement, 2479
- MDY
 - function, 94
- MDY function, 149
- MEAN= option
 - MODEL statement (AUTOREG), 346
- MEASURE= option
 - TARGET statement (SIMILARITY), 1659
- MEDIAN option
 - FORECAST statement (ESM), 762

- MELO option
 - PROC SYSLIN statement, 1898
- MEMORYUSE option
 - PROC MODEL statement, 1054
- METHOD= option
 - ARIMA statement (X11), 2410
 - CONVERT statement (EXPAND), 804, 811
 - ENTROPY procedure, 717
 - ESTIMATE statement (ARIMA), 235
 - FIT statement (MODEL), 1072, 1106
 - MODEL statement (AUTOREG), 357
 - MODEL statement (PDLREG), 1432
 - MODEL statement (VARMAX), 2258
 - PROC COUNTREG statement, 562
 - PROC EXPAND statement, 802, 811
 - PROC FORECAST statement, 864
 - PROC TCOUNTREG statement, 1947
 - QLIM procedure, 1460
- MILLS
 - OUTPUT statement (QLIM), 1467
- MINIC option
 - IDENTIFY statement (ARIMA), 231
 - PROC STATESPACE statement, 1845
- MINIC= option
 - MODEL statement (VARMAX), 2265
- MINIC=(P=) option
 - MODEL statement (VARMAX), 2265, 2304
- MINIC=(PERROR=) option
 - MODEL statement (VARMAX), 2265
- MINIC=(Q=) option
 - MODEL statement (VARMAX), 2265, 2304
- MINIC=(TYPE=) option
 - MODEL statement (VARMAX), 2265
- MINR= option
 - ARM statement (LOAN), 920
- MINRATE= option
 - ARM statement (LOAN), 920
- MINTIMESTEP= option
 - FIT statement (MODEL), 1072, 1224
 - MODEL statement (MODEL), 1224
 - SOLVE statement (MODEL), 1224
- MINUTE
 - function, 149
- MISSING=option
 - FIT statement (MODEL), 1068
- MIXED option
 - MODEL statement (MDC), 967
- MODE= option
 - DECOMP statement (TIMESERIES), 2036
 - X11 statement (X12), 2509
- MODEL procedure, 1042
 - syntax, 1042
- MODEL statement
 - AUTOREG procedure, 344
 - COUNTREG procedure, 565
 - ENTROPY procedure, 720
 - MDC procedure, 966
 - PANEL procedure, 1351, 1352
 - PDLREG procedure, 1430
 - QLIM procedure, 1466
 - SSM procedure, 1779
 - SYSLIN procedure, 1901
 - TCOUNTREG procedure, 1949
 - TSCSREG procedure, 2100
 - UCM procedure, 2136
 - VARMAX procedure, 2256
- MODEL= option
 - ARIMA statement (X11), 2410
 - ARIMA statement (X12), 2485
 - FORECAST statement (ESM), 762
 - PROC MODEL statement, 1051, 1244
- MOMENT statement
 - MODEL procedure, 1075
- MONTH
 - function, 94, 149
- MONTHLY statement
 - X11 procedure, 2413
- MTITLE= option
 - COLUMNS statement (COMPUTAB), 470
- MU= option
 - ESTIMATE statement (ARIMA), 237
- N**
 - +n option
 - COLUMNS statement (COMPUTAB), 470
 - ROWS statement (COMPUTAB), 472
 - N2SLS option
 - FIT statement (MODEL), 1066
 - N3SLS option
 - FIT statement (MODEL), 1066
 - NAHEAD= option
 - SOLVE statement (MODEL), 1081, 1194, 1195
 - _NAME_ option
 - COLUMNS statement (COMPUTAB), 470
 - ROWS statement (COMPUTAB), 472
 - NBACKCAST= option
 - FORECAST statement (ESM), 762
 - FORECAST statement (X12), 2493
 - NBLOCKS= option
 - BLOCKSEASON statement (UCM), 2123
 - NBYOBS= option
 - PROC TIMEID statement, 2000
 - NCHOICE option
 - MODEL statement (MDC), 968
 - NDEC= option
 - MONTHLY statement (X11), 2415
 - PROC MODEL statement, 1053

- QUARTERLY statement (X11), 2420
- SSPAN statement (X11), 2421
- NDRAW option
 - FIT statement (MODEL), 1066
- NDRAW= option
 - QLIM procedure, 1460
- NEST statement
 - MDC procedure, 972
- NESTIT option
 - FIT statement (MODEL), 1072, 1106
- NEWTON option
 - SOLVE statement (MODEL), 1082
- NKNOTS= option
 - SPLINEREG statement (UCM), 2142
- NLAG= option
 - CORR statement (TIMESERIES), 2034
 - CROSSCORR statement (TIMESERIES), 2035
 - IDENTIFY statement (ARIMA), 232
 - MODEL statement (AUTOREG), 345
 - MODEL statement (PDLREG), 1432
- NLAGS= option
 - PROC FORECAST statement, 863
- NLAMBDA= option
 - BOXCOXAR macro, 155
- NLOPTIONS statement
 - AUTOREG procedure, 359
 - COUNTREG procedure, 566
 - MDC procedure, 975
 - QLIM procedure, 1467
 - SEVERITY procedure, 1550
 - TCOUNTREG procedure, 1952
 - UCM procedure, 2136
 - VARMAX procedure, 2272, 2316
- NO2SLS option
 - FIT statement (MODEL), 1066
- NO3SLS option
 - FIT statement (MODEL), 1066
- NOCENTER option
 - PROC STATESPACE statement, 1845
- NOCOMPRINT option
 - COMPARE statement (LOAN), 924
- NOCONST option
 - HETERO statement (AUTOREG), 359
- NOCONSTANT option
 - ESTIMATE statement (ARIMA), 235
- NOCURRENTX option
 - MODEL statement (VARMAX), 2258
- NODF option
 - ESTIMATE statement (ARIMA), 235
- NODIFFS option
 - MODEL statement (PANEL), 1354
- NOEST option
 - AUTOREG statement (UCM), 2121
 - BLOCKSEASON statement (UCM), 2123
 - CYCLE statement (UCM), 2125
 - DEPLAG statement (UCM), 2126
 - ESTIMATE statement (ARIMA), 237
 - IRREGULAR statement (UCM), 2132, 2134
 - LEVEL statement (UCM), 2135
 - PROC STATESPACE statement, 1846
 - RANDOMREG statement (UCM), 2138
 - SEASON statement (UCM), 2140
 - SLOPE statement (UCM), 2141
 - SPLINEREG statement (UCM), 2142
 - SPLINESEASON statement (UCM), 2143
- NOESTIM option
 - MODEL statement (PANEL), 1354
- NOGENGMMV option
 - FIT statement (MODEL), 1067
- NOINCLUDE option
 - PROC SYSLIN statement, 1898
- NOINT option
 - ARIMA statement (X11), 2411
 - AUTOMODL statement (X12), 2487
 - ESTIMATE statement (ARIMA), 235
 - INSTRUMENTS statement (MODEL), 1074
 - MODEL statement (AUTOREG), 344, 346
 - MODEL statement (COUNTREG), 565
 - MODEL statement (ENTROPY), 720
 - MODEL statement (PANEL), 1354
 - MODEL statement (PDLREG), 1432
 - MODEL statement (QLIM), 1466
 - MODEL statement (SYSLIN), 1902
 - MODEL statement (TCOUNTREG), 1950
 - MODEL statement (TSCSREG), 2101
 - MODEL statement (VARMAX), 2258
- NOINTERCEPT option
 - INSTRUMENTS statement (MODEL), 1074
- NOLEVELS option
 - MODEL statement (PANEL), 1354
- NOLS option
 - ESTIMATE statement (ARIMA), 238
- NOMEAN option
 - MODEL statement (TSCSREG), 2101
- NOMISS option
 - IDENTIFY statement (ARIMA), 232
 - MODEL statement (AUTOREG), 357
- NONORMALIZE option
 - WEIGHT statement (COUNTREG), 568
 - WEIGHT statement (QLIM), 1470
 - WEIGHT statement (TCOUNTREG), 1954
- NOOLS option
 - FIT statement (MODEL), 1066
- NOOUTALL option
 - FORECAST statement (ARIMA), 241
 - PROC ESM statement, 758
- NOP option
 - FIXED statement (LOAN), 918

- NOPRINT option
 - ARIMA statement (X11), 2411
 - COLUMNS statement (COMPUTAB), 471
 - ESTIMATE statement (ARIMA), 235
 - FIXED statement (LOAN), 918
 - FORECAST statement (ARIMA), 241
 - IDENTIFY statement (ARIMA), 232
 - MODEL statement (AUTOREG), 350
 - MODEL statement (MDC), 970
 - MODEL statement (PANEL), 1354
 - MODEL statement (PDLREG), 1432
 - MODEL statement (SYSLIN), 1902
 - MODEL statement (TSCSREG), 2101
 - MODEL statement (VARMAX), 2259
 - OUTPUT statement (VARMAX), 2273
 - PROC COMPUTAB statement, 469
 - PROC COUNTREG statement, 562
 - PROC ENTROPY statement, 715
 - PROC MODEL statement, 1053
 - PROC QLIM statement, 1459
 - PROC SEVERITY statement, 1539
 - PROC SIMLIN statement, 1713
 - PROC STATESPACE statement, 1844
 - PROC SYSLIN statement, 1899
 - PROC TCOUNTREG statement, 1946
 - PROC UCM statement, 2118
 - PROC VARMAX statement (VARMAX), 2351
 - PROC X11 statement, 2409
 - ROWS statement (COMPUTAB), 472
 - SSPAN statement (X11), 2421
 - NOPROFILE
 - ESTIMATE statement (UCM), 2127
 - NORED option
 - PROC SIMLIN statement, 1713
 - NORMAL option
 - ERRORMODEL statement (MODEL), 1060
 - FIT statement (MODEL), 1071
 - MODEL statement (AUTOREG), 350
 - NORMALEC= option
 - MODEL statement (MDC), 967
 - NORMALIZE= option
 - COINTEG statement (VARMAX), 2255, 2365
 - INPUT statement (SIMILARITY), 1654
 - TARGET statement (SIMILARITY), 1659
 - NORMALPARM= option
 - MODEL statement (MDC), 967
 - NORTR option
 - PROC COMPUTAB statement, 469
 - NOSTABLE option
 - ESTIMATE statement (ARIMA), 238
 - NOSTORE option
 - PROC MODEL statement, 1051
 - NOSUM
 - TABLES statement (X12), 2505
 - NOSUMMARYPRINT option
 - FIXED statement (LOAN), 918
 - NOSUMPR option
 - FIXED statement (LOAN), 918
 - NOTFSTABLE option
 - ESTIMATE statement (ARIMA), 238
 - NOTRANS option
 - PROC COMPUTAB statement, 468
 - NOTRANSPOSE option
 - PROC COMPUTAB statement, 468
 - NOTSORTED option
 - ID statement (ESM), 765
 - ID statement (SIMILARITY), 1653
 - ID statement (TIMESERIES), 2040
 - TIMEID procedure, 2002
 - NOZERO option
 - COLUMNS statement (COMPUTAB), 471
 - ROWS statement (COMPUTAB), 472
 - NPARMS= option
 - CORR statement (TIMESERIES), 2034
 - NPERIODS option
 - SSA statement (TIMESERIES), 2044
 - NPERIODS= option
 - DECOMP statement (TIMESERIES), 2037
 - TREND statement (TIMESERIES), 2046
 - NPREOBS option
 - FIT statement (MODEL), 1067
 - NSEASON= option
 - MODEL statement (VARMAX), 2258
 - NSIMUL option
 - MODEL statement (MDC), 968
 - NSSTART= MAX option
 - PROC FORECAST statement, 865
 - NSSTART= option
 - PROC FORECAST statement, 865
 - NSTART= MAX option
 - PROC FORECAST statement, 865
 - NSTART= option
 - PROC FORECAST statement, 865
 - NVDRAW option
 - FIT statement (MODEL), 1067
 - NWKDOM
 - function, 150
- ## O
- OBJECTIVE= option
 - PROC SEVERITY statement, 1545
 - OBSERVED= option
 - CONVERT statement (EXPAND), 804, 809
 - PROC EXPAND statement, 802
 - OFFSET= option
 - BLOCKSEASON statement (UCM), 2123
 - MODEL statement (COUNTREG), 565

- MODEL statement (TCOUNTREG), 1950
- SPLINESEASON statement (UCM), 2143
- OL option
 - ROWS statement (COMPUTAB), 472
- OLS option
 - FIT statement (MODEL), 1067, 1257
 - PROC SYSLIN statement, 1898
- ONEPASS option
 - SOLVE statement (MODEL), 1082
- OPTIONS option
 - PROC COMPUTAB statement, 469
- OPTMETHOD= option
 - MODEL statement (AUTOREG), 357
 - MODEL statement (MDC), 971
- ORDER= option
 - ENDOGENOUS statement (QLIM), 1462
 - PROC SIMILARITY statement, 1648
- OTHERWISE, 1242
- OUT = option
 - FlatData statement (PANEL), 1349
- OUT1STEP option
 - FORECAST statement (X12), 2493
 - PROC FORECAST statement, 866
- OUT= option
 - BOXCOXAR macro, 155
 - DFTEST macro, 159
 - ENTROPY procedure, 715
 - FIT statement (MODEL), 1068, 1187, 1259
 - FIXED statement (LOAN), 918, 927
 - FORECAST command (TSFS), 2989
 - FORECAST statement (ARIMA), 241, 264
 - LOGTEST macro, 160
 - OUTPUT statement (AUTOREG), 360
 - OUTPUT statement (COUNTREG), 566
 - OUTPUT statement (MDC), 975
 - OUTPUT statement (PANEL), 1356
 - OUTPUT statement (PDLREG), 1433
 - OUTPUT statement (QLIM), 1467
 - OUTPUT statement (SIMLIN), 1716
 - OUTPUT statement (SYSLIN), 1917
 - OUTPUT statement (TCOUNTREG), 1952
 - OUTPUT statement (VARMAX), 2273, 2350
 - OUTPUT statement (X11), 2417, 2437
 - OUTPUT statement (X12), 2498
 - PROC ARIMA statement, 230
 - PROC COMPUTAB statement, 469
 - PROC DATASOURCE statement, 618, 627
 - PROC ESM statement, 758
 - PROC EXPAND statement, 801, 828
 - PROC FORECAST statement, 865, 879
 - PROC SIMILARITY statement, 1648
 - PROC SIMLIN statement, 1721
 - PROC SPECTRA statement, 1744, 1750
 - PROC STATESPACE statement, 1847, 1862
 - PROC SYSLIN statement, 1897
 - PROC TIMESERIES statement, 2030
 - SOLVE statement (MODEL), 1080, 1198, 1227
 - TEST statement (ENTROPY), 723
 - TEST statement (MODEL), 1086
- OUT= table names
 - OUTPUT statement (X12), 2498
- OUTACTUAL option
 - FIT statement (MODEL), 1068
 - PROC FORECAST statement, 865
 - SOLVE statement (MODEL), 1080
- OUTALL option
 - FIT statement (MODEL), 1068
 - PROC FORECAST statement, 865
 - SOLVE statement (MODEL), 1080
- OUTALL= option
 - PROC DATASOURCE statement, 618, 630
- OUTAR= option
 - PROC STATESPACE statement, 1845, 1863
- OUTBACKCAST option
 - FORECAST statement (X12), 2493
- OUTBY= option
 - PROC DATASOURCE statement, 619, 629
- OUTCDF= option
 - PROC SEVERITY statement, 1539
- OUTCOMP= option
 - COMPARE statement (LOAN), 924, 927
- OUTCONT= option
 - PROC DATASOURCE statement, 619, 628
- OUTCORR option
 - ESTIMATE statement (ARIMA), 236
 - PROC PANEL statement, 1346
 - PROC TSCSREG statement, 2098
- OUTCORR= option
 - PROC TIMESERIES statement, 2030
- OUTCOV option
 - ENTROPY procedure, 715
 - ESTIMATE statement (ARIMA), 236
 - ESTIMATE statement (MODEL), 1062
 - FIT statement (MODEL), 1068
 - PROC PANEL statement, 1346
 - PROC SYSLIN statement, 1897
 - PROC TSCSREG statement, 2098
 - PROC VARMAX statement, 2250, 2352
- OUTCOV3 option
 - PROC SYSLIN statement, 1897
- OUTCOV= option
 - IDENTIFY statement (ARIMA), 232, 265
- OUTCROSSCORR= option
 - PROC TIMESERIES statement, 2030
- OUTDECOMP= option
 - PROC TIMESERIES statement, 2030
- OUTERRORS option
 - SOLVE statement (MODEL), 1080

- OUTEST= option
 - ENTROPY procedure, 715
 - ENTROPY statement, 737
 - ESTIMATE statement (ARIMA), 236, 266
 - ESTIMATE statement (MODEL), 1062
 - ESTIMATE statement (UCM), 2127
 - FIT statement (MODEL), 1068, 1189
 - PROC AUTOREG statement, 342
 - PROC COUNTREG statement, 562
 - PROC ESM statement, 758
 - PROC EXPAND statement, 801, 828
 - PROC FORECAST statement, 866, 880
 - PROC MDC statement, 964
 - PROC PANEL statement, 1346, 1397
 - PROC QLIM statement, 1459
 - PROC SEVERITY statement, 1540
 - PROC SIMLIN statement, 1713, 1720
 - PROC SYSLIN statement, 1897, 1917
 - PROC TCOUNTREG statement, 1946
 - PROC TSCSREG statement, 2098
 - PROC VARMAX statement, 2249, 2352
- OUTESTALL option
 - PROC FORECAST statement, 866
- OUTESTTHEIL option
 - PROC FORECAST statement, 866
- OUTEVENT= option
 - PROC DATASOURCE statement, 619, 631
- OUTEXTRAP option
 - PROC X11 statement, 2408
- OUTFITSTATS option
 - PROC FORECAST statement, 866
- OUTFOR= option
 - FORECAST statement (UCM), 2130
 - PROC ESM statement, 759
- OUTFORECAST option
 - FORECAST statement (X12), 2493
 - X11 statement (X12), 2510
- OUTFULL option
 - PROC FORECAST statement, 866
- OUTHT= option
 - GARCH statement, 2271
 - PROC VARMAX statement, 2354
- OUTINTERVAL= option
 - PROC TIMEID statement, 2000
- OUTINTERVALDETAILS= option
 - PROC TIMEID statement, 2000
- OUTL= option
 - ENTROPY procedure, 715
 - ENTROPY statement, 738
- OUTLAGS option
 - FIT statement (MODEL), 1068
 - SOLVE statement (MODEL), 1080
- OUTLIER statement
 - UCM procedure, 2137
 - X12 procedure, 2496
- OUTLIMIT option
 - PROC FORECAST statement, 866
- OUTMEASURE= option
 - PROC SIMILARITY statement, 1648
- OUTMODEL= option
 - ESTIMATE statement (ARIMA), 236, 268
 - PROC MODEL statement, 1051, 1243
 - PROC STATESPACE statement, 1846, 1864
- OUTMODELINFO= option
 - PROC SEVERITY statement, 1540
- OUTP= option
 - ENTROPY procedure, 715
 - ENTROPY statement, 737
- OUTPARMS= option
 - FIT statement (MODEL), 1189
 - PROC MODEL statement, 1050, 1184
- OUTPATH= option
 - PROC SIMILARITY statement, 1648
- OUTPREDICT option
 - FIT statement (MODEL), 1068
 - SOLVE statement (MODEL), 1080
- OUTPROCINFO= option
 - PROC ESM statement, 759
 - PROC TIMESERIES statement, 2030
- OUTPUT
 - OUT=, 405
- OUTPUT statement
 - AUTOREG procedure, 360
 - COUNTREG procedure, 566
 - PANEL procedure, 1355
 - PDLREG procedure, 1432
 - PROC PANEL statement, 1396
 - QLIM procedure, 1467
 - SIMLIN procedure, 1715
 - SYSLIN procedure, 1902
 - TCOUNTREG procedure, 1952
 - VARMAX procedure, 2273
 - X11 procedure, 2417
 - X12 procedure, 2498
- OUTRESID option
 - FIT statement (MODEL), 1068, 1259
 - PROC FORECAST statement, 866
 - SOLVE statement (MODEL), 1080
- OUTS= option
 - ENTROPY procedure, 715
 - FIT statement (MODEL), 1068, 1105, 1189
- OUTSEASON= option
 - PROC TIMESERIES statement, 2030
- OUTSELECT= option
 - PROC DATASOURCE statement, 619
- OUTSELECT=OFF option
 - LIBNAME statement (SASEHAVR), 2775
- OUTSELECT=ON option

LIBNAME statement (SASEHAVR), 2775

OUTSEQUENCE= option

PROC SIMILARITY statement, 1649

OUTSN= option

FIT statement (MODEL), 1068

OUTSPAN= option

PROC X11 statement, 2409, 2437

VAR statement (X11), 2437

OUTSPECTRA= option

PROC TIMESERIES statement, 2030

OUTSSA= option

PROC TIMESERIES statement, 2030

OUTSSCP= option

PROC SYSLIN statement, 1898, 1919

OUTSTAT= option

DFTEST macro, 159

ESTIMATE statement (ARIMA), 236, 269

PROC ESM statement, 759

PROC SEVERITY statement, 1540

PROC VARMAX statement, 2250, 2355

PROC X12 statement, 2479

OUTSTB= option

PROC X11 statement, 2409, 2438

OUTSTD option

PROC FORECAST statement, 866

OUTSUM= option

FIXED statement (LOAN), 918

PROC ESM statement, 759

PROC LOAN statement, 915, 928

PROC SIMILARITY statement, 1649

PROC TIMESERIES statement, 2030

OUTSUSED= option

ENTROPY procedure, 715

FIT statement (MODEL), 1069, 1105, 1190

OUTTDR= option

PROC X11 statement, 2409, 2438

OUTTRANS= option

PROC PANEL statement, 1398

OUTTRANS=option

PROC PANEL statement, 1346

OUTTREND= option

PROC TIMESERIES statement, 2030

OUTUNWGTRESID option

FIT statement (MODEL), 1069

OUTV= option

FIT statement (MODEL), 1069, 1186, 1190

OUTVARS statement

MODEL procedure, 1077

OVDIFCR= option

ARIMA statement (X11), 2411

OVERID option

MODEL statement (SYSLIN), 1902

OVERPRINT option

ROWS statement (COMPUTAB), 473

P

P option

IRREGULAR statement (UCM), 2134

PROC SPECTRA statement, 1744

P= option

ESTIMATE statement (ARIMA), 235

FIXED statement (LOAN), 916

GARCH statement, 2271

IDENTIFY statement (ARIMA), 232

MODEL statement (AUTOREG), 345

MODEL statement (VARMAX), 2264

OUTPUT statement (AUTOREG), 361

OUTPUT statement (MDC), 976

OUTPUT statement (PANEL), 1356

OUTPUT statement (PDLREG), 1433

OUTPUT statement (SIMLIN), 1716

PAGE option

COLUMNS statement (COMPUTAB), 471

ROWS statement (COMPUTAB), 473

PANEL procedure, 1344

syntax, 1344

PARAMETERS statement

MODEL procedure, 1077, 1228

PARKS option

MODEL statement (PANEL), 1354

MODEL statement (TSCSREG), 2101

PARMS statement

SSM procedure, 1780

PARMS= option

FIT statement (MODEL), 1064

PARMSDATA= option

PROC MODEL statement, 1050, 1184

SOLVE statement (MODEL), 1081

PARMTOL= option

PROC STATESPACE statement, 1846

PARTIAL option

MODEL statement (AUTOREG), 350

MODEL statement (PDLREG), 1432

PASTMIN= option

PROC STATESPACE statement, 1846

PATH= option

TARGET statement (SIMILARITY), 1660

PAYMENT= option

FIXED statement (LOAN), 916

PCHOW= option

FIT statement (MODEL), 1071, 1159

MODEL statement (AUTOREG), 350

PDATA= option

ENTROPY procedure, 715

ENTROPY statement, 736

%PDL macro, 1181

PDLREG procedure, 1427

syntax, 1427

- PDWEIGHTS statement
 - X11 procedure, 2418
- PERIOD= option
 - CYCLE statement (UCM), 2125
- PERIODOGRAM option
 - PROC X12 statement, 2479
- PERMCO= option
 - LIBNAME statement (SASECRSP), 2587
- PERMNO= option
 - LIBNAME statement (SASECRSP), 2584
 - LIBNAME statement (SASEXCCM), 2681
- PERROR= option
 - IDENTIFY statement (ARIMA), 232
- PH option
 - PROC SPECTRA statement, 1744
- PHI option
 - MODEL statement (PANEL), 1355
 - MODEL statement (TSCSREG), 2101
- PHI= option
 - DEPLAG statement (UCM), 2126
- PLOT
 - HAXIS=, 85
- PLOT option
 - AUTOREG statement (UCM), 2122
 - BLOCKSEASON statement (UCM), 2123
 - CYCLE statement (UCM), 2125
 - ESTIMATE statement (ARIMA), 235
 - ESTIMATE statement (UCM), 2128
 - FORECAST statement (UCM), 2130
 - IRREGULAR statement (UCM), 2132
 - MODEL statement (SYSLIN), 1902
 - PROC ARIMA statement, 227
 - PROC UCM statement, 2118
 - PROC X12 statement, 2479
 - RANDOMREG statement (UCM), 2138
 - SEASON statement (UCM), 2140
 - SLOPE statement (UCM), 2141
 - SPLINEREG statement (UCM), 2142
 - SPLINESEASON statement (UCM), 2143
- PLOT= option
 - PROC ESM statement, 759
 - PROC TIMEID statement, 2000
- PLOTS option
 - PROC ARIMA statement, 227
 - PROC AUTOREG statement, 343
 - PROC ENTROPY statement, 715
 - PROC MODEL statement, 1050
 - PROC PANEL statement, 1347
 - PROC UCM statement, 2118
 - PROC X12 statement, 2479
- PLOTS= option
 - PROC EXPAND statement, 802
 - PROC SEVERITY statement, 1540
 - PROC SIMILARITY statement, 1649
- PROC TIMESERIES statement, 2031
- PM= option
 - OUTPUT statement (AUTOREG), 361
 - OUTPUT statement (PDLREG), 1433
- PMFACTOR= option
 - MONTHLY statement (X11), 2415
- PNT= option
 - FIXED statement (LOAN), 917
- PNTPCT= option
 - FIXED statement (LOAN), 917
- POINTPCT= option
 - FIXED statement (LOAN), 917
- POINTS= option
 - FIXED statement (LOAN), 917
- POISSON option
 - ERRORMODEL statement (MODEL), 1060
- POOLED option
 - MODEL statement (PANEL), 1355
- POWER= option
 - TRANSFORM statement (X12), 2505
- PRC= option
 - FIXED statement (LOAN), 918
- pred
 - OUTPUT statement (COUNTREG), 566
 - OUTPUT statement (TCOUNTREG), 1952
- PREDEFINED= option
 - ADJUST statement (X12), 2484
 - PREDEFINED statement (X12), 2500
- PREDICTED
 - OUTPUT statement (QLIM), 1467
- PREDICTED= option
 - OUTPUT statement (AUTOREG), 361
 - OUTPUT statement (PANEL), 1356
 - OUTPUT statement (PDLREG), 1433
 - OUTPUT statement (SIMLIN), 1716
 - OUTPUT statement (SYSLIN), 1902
- PREDICTEDM= option
 - OUTPUT statement (AUTOREG), 361
 - OUTPUT statement (PDLREG), 1433
- PREPAYMENTS= option
 - FIXED statement (LOAN), 917
- PRICE= option
 - FIXED statement (LOAN), 918
- PRIMAL option
 - ENTROPY procedure, 716
- PRINT option
 - AUTOREG statement (UCM), 2122
 - BLOCKSEASON statement (UCM), 2123
 - CYCLE statement (UCM), 2125
 - ESTIMATE statement (UCM), 2129
 - FORECAST statement (UCM), 2131
 - IRREGULAR statement (UCM), 2132
 - LEVEL statement (UCM), 2135, 2136
 - OUTLIER statement (UCM), 2137

- PROC STATESPACE statement, 1847
- RANDOMREG statement (UCM), 2138
- SEASON statement (UCM), 2140
- SLOPE statement (UCM), 2141
- SPLINESEASON statement (UCM), 2143
- SSPAN statement (X11), 2421
- STEST statement (SYSLIN), 1907
- TEST statement (SYSLIN), 1908
- PRINT= option
 - AUTOMDL statement (X12), 2488
 - BOXCOXAR macro, 155
 - CHECK statement (X12), 2490
 - LOGTEST macro, 161
 - MODEL statement (VARMAX), 2260
 - PROC COPULA statement, 521
 - PROC SEVERITY statement, 1541
 - PROC SIMILARITY statement, 1649
 - PROC TIMEID statement, 2001
 - PROC TIMESERIES statement, 2032
- PRINT=(CORRB) option
 - MODEL statement (VARMAX), 2260
- PRINT=(CORRX) option
 - MODEL statement (VARMAX), 2260
- PRINT=(CORY) option
 - MODEL statement (VARMAX), 2260, 2299
- PRINT=(COVB) option
 - MODEL statement (VARMAX), 2260
- PRINT=(COVPE) option
 - MODEL statement (VARMAX), 2260, 2295
- PRINT=(COVX) option
 - MODEL statement (VARMAX), 2261
- PRINT=(COVY) option
 - MODEL statement (VARMAX), 2261
- PRINT=(DECOMPOSE) option
 - MODEL statement (VARMAX), 2261, 2297
- PRINT=(DIAGNOSE) option
 - MODEL statement (VARMAX), 2261
- PRINT=(DYNAMIC) option
 - MODEL statement (VARMAX), 2261, 2281
- PRINT=(ESTIMATES) option
 - MODEL statement (VARMAX), 2261
- PRINT=(IARR) option
 - MODEL statement (VARMAX), 2234, 2261
- PRINT=(IMPULSE) option
 - MODEL statement (VARMAX), 2288
- PRINT=(IMPULSE=) option
 - MODEL statement (VARMAX), 2261
- PRINT=(IMPULSX) option
 - MODEL statement (VARMAX), 2284
- PRINT=(IMPULSX=) option
 - MODEL statement (VARMAX), 2262
- PRINT=(PARCOEF) option
 - MODEL statement (VARMAX), 2263, 2301
- PRINT=(PCANCORR) option
 - MODEL statement (VARMAX), 2263, 2303
- PRINT=(PCORR) option
 - MODEL statement (VARMAX), 2263, 2302
- PRINT=(ROOTS) option
 - MODEL statement (VARMAX), 2263, 2306
- PRINT=(YW) option
 - MODEL statement (VARMAX), 2264
- PRINT=option
 - PROC ESM statement, 760
- PRINTALL option
 - ARIMA statement (X11), 2411
 - ESTIMATE statement (ARIMA), 238
 - FIT statement (MODEL), 1071
 - FORECAST statement (ARIMA), 241
 - MODEL statement, 566, 1952
 - MODEL statement (VARMAX), 2260
 - PROC MODEL statement, 1053
 - PROC QLIM statement, 1459
 - PROC UCM statement, 2121
 - SOLVE statement (MODEL), 1084
 - SSPAN statement (X11), 2421
- PRINTDETAILS option
 - PROC ESM statement, 760
 - PROC SIMILARITY statement, 1650
 - PROC TIMESERIES statement, 2032
- PRINTERR option
 - ESTIMATE statement (X12), 2491
- PRINTFORM= option
 - MODEL statement (VARMAX), 2260, 2284
- PRINTFP option
 - ARIMA statement (X11), 2411
- PRINTOUT= option
 - MONTHLY statement (X11), 2415
 - PROC STATESPACE statement, 1845
 - QUARTERLY statement (X11), 2420
- PRINTREG option
 - IDENTIFY statement (X12), 2495
- PRIOR option
 - MODEL statement (VARMAX), 2268
- PRIOR=(IVAR) option
 - MODEL statement (VARMAX), 2268
- PRIOR=(LAMBDA=) option
 - MODEL statement (VARMAX), 2269
- PRIOR=(MEAN=) option
 - MODEL statement (VARMAX), 2269
- PRIOR=(NREP=) option
 - MODEL statement (VARMAX), 2269
- PRIOR=(THETA=) option
 - MODEL statement (VARMAX), 2270
- PRIORS statement
 - ENTROPY procedure, 721
- PRL= option
 - FIT statement (MODEL), 1064, 1161
- PROB

OUTPUT statement (COUNTREG), 566
 OUTPUT statement (QLIM), 1467
 OUTPUT statement (TCOUNTREG), 1952
 PROBALL
 OUTPUT statement (QLIM), 1468
 PROBCOUNT
 OUTPUT statement (COUNTREG), 567
 OUTPUT statement (TCOUNTREG), 1952
 PROBDF
 function, 162
 macro, 162
 PROBOBSERVED= option
 LOSS statement, 1547
 PROBZERO
 OUTPUT statement (COUNTREG), 567
 OUTPUT statement (TCOUNTREG), 1953
 PROC ARIMA statement, 227
 PROC AUTOREG
 OUTEST=, 405
 PROC AUTOREG statement, 342
 PROC COMPUTAB
 NOTRANS, 477
 OUT=, 486
 PROC COMPUTAB statement, 468
 PROC COPULA statement
 COPULA procedure, 518
 PROC DATASOURCE statement, 616
 PROC ENTROPY statement, 714
 PROC ESM statement, 758
 PROC EXPAND statement, 800
 PROC FORECAST statement, 863
 PROC LOAN statement, 914
 PROC MDC statement, 964
 PROC MODEL statement, 1050
 PROC PANEL statement, 1346
 PROC PDLREG statement, 1429
 PROC SEVERITY statement, 1539
 PROC SIMILARITY statement, 1648
 PROC SIMLIN statement, 1713
 PROC SPECTRA statement, 1743
 PROC SSM statement, 1777, *see* SSM procedure
 PROC STATESPACE statement, 1844
 PROC SYSLIN statement, 1897
 PROC TIMEID statement, 2000
 PROC TIMESERIES statement, 2029
 PROC TSCSREG statement, 2098
 PROC UCM statement, 2118, *see* UCM procedure
 PROC VARMAX statement, 2249
 PROC X11 statement, 2408
 PROC X12 statement, 2477
 PRODUCTION option
 ENDOGENOUS statement (QLIM), 1463
 PROFILE
 ESTIMATE statement (UCM), 2129

PROJECT= option
 FORECAST command (TSFS), 2987
 PSEUDO= option
 SOLVE statement (MODEL), 1082
 PURE option
 ENTROPY procedure, 714
 PURGE option
 RESET statement (MODEL), 1078
 PUT, 1241
 PWC option
 COMPARE statement (LOAN), 923
 PWOF COST option
 COMPARE statement (LOAN), 923

Q

Q option
 IRREGULAR statement (UCM), 2134
 Q= option
 ESTIMATE statement (ARIMA), 236
 GARCH statement, 2272
 IDENTIFY statement (ARIMA), 232
 MODEL statement (AUTOREG), 345
 MODEL statement (VARMAX), 2264, 2316
 QLIM procedure, 1456
 syntax, 1456
 QLIM procedure, CLASS statement, 1461
 QLIM procedure, FREQ statement, 1464
 QLIM procedure, TEST statement, 1469
 QLIM procedure, WEIGHT statement, 1470
 QTR
 function, 150
 QUARTERLY statement
 X11 procedure, 2418
 QUASI= option
 SOLVE statement (MODEL), 1083
 QUIET= option
 FCMPOPT statement (SIMILARITY), 1651

R

R= option
 FIXED statement (LOAN), 916
 OUTPUT statement (AUTOREG), 361
 OUTPUT statement (PANEL), 1356
 OUTPUT statement (PDLREG), 1433
 OUTPUT statement (SIMLIN), 1716
 RANDINIT option
 MODEL statement (MDC), 968
 RANDNUM= option
 MODEL statement (MDC), 968
 RANDOM= option
 SOLVE statement (MODEL), 1083, 1197, 1213
 RANDOMREG

- UCM procedure, 2137
- RANGE, 1230
- RANGE option
 - MODEL statement (ENTROPY), 721
- RANGE statement
 - DATASOURCE procedure, 622
 - MODEL procedure, 1077
- RANGE= option
 - LIBNAME statement (SASECRSP), 2589
 - LIBNAME statement (SASEFAME), 2722
- RANK option
 - MODEL statement (MDC), 968
- RANK= option
 - COINTEG statement (VARMAX), 2255, 2336
- RANONE option
 - MODEL statement (PANEL), 1355
 - MODEL statement (TSCSREG), 2101
- RANTWO option
 - MODEL statement (PANEL), 1355
 - MODEL statement (TSCSREG), 2101
- RAO option
 - TEST statement (ENTROPY), 723
 - TEST statement (MODEL), 1085
- RATE= option
 - FIXED statement (LOAN), 916
- RECFM= option
 - PROC DATASOURCE statement, 618
- RECPEV= option
 - OUTPUT statement (AUTOREG), 361
- RECRES= option
 - OUTPUT statement (AUTOREG), 361
- REDUCECV= option
 - AUTOMDL statement (X12), 2488
- REDUCED option
 - PROC SYSLIN statement, 1899
- REEVAL option
 - FORECAST command (TSFS), 2989
- REFIT option
 - FORECAST command (TSFS), 2989
- REGRESSION statement
 - X12 procedure, 2499
- Remote Fame data access
 - physical name using #port number, 2721
- RENAME statement
 - DATASOURCE procedure, 625
- REPLACEBACK option
 - FORECAST statement (ESM), 762
- REPLACEMISSING option
 - FORECAST statement (ESM), 762
- RESET option
 - MODEL statement (AUTOREG), 350
- RESET statement
 - MODEL procedure, 1078
- RESIDDATA= option
 - SOLVE statement (MODEL), 1081
- RESIDEST option
 - PROC STATESPACE statement, 1847
- RESIDUAL
 - OUTPUT statement (QLIM), 1468
- RESIDUAL= option
 - OUTPUT statement (AUTOREG), 361
 - OUTPUT statement (PANEL), 1356
 - OUTPUT statement (PDLREG), 1433
 - OUTPUT statement (SIMLIN), 1716
 - OUTPUT statement (SYSLIN), 1902
- RESIDUALM= option
 - OUTPUT statement (AUTOREG), 362
 - OUTPUT statement (PDLREG), 1433
- RESTART option
 - MODEL statement (MDC), 968
- RESTRICT statement
 - AUTOREG procedure, 362
 - COUNTREG procedure, 567
 - ENTROPY procedure, 721
 - MDC procedure, 976
 - MODEL procedure, 1079
 - PDLREG procedure, 1434
 - QLIM procedure, 1468
 - STATESPACE procedure, 1849
 - SYSLIN procedure, 1903
 - TCOUNTREG procedure, 1953
 - VARMAX procedure, 2274
- RETAIN statement
 - MODEL procedure, 1243
- RHO option
 - MODEL statement (PANEL), 1355
 - MODEL statement (TSCSREG), 2101
- RHO= option
 - AUTOREG statement (UCM), 2122
 - CYCLE statement (UCM), 2125
- RIGHTCENSORED= option
 - LOSS statement, 1547
- RIGHTTRUNCATED= option
 - LOSS statement, 1548
- RKNOTS option
 - SPLINESEASON statement (UCM), 2144
- RM= option
 - OUTPUT statement (AUTOREG), 362
 - OUTPUT statement (PDLREG), 1433
- ROBUST option
 - MODEL statement (PANEL), 1355
- ROUND= NONE option
 - FIXED statement (LOAN), 918
- ROUND= option
 - FIXED statement (LOAN), 918
- 'row titles' option
 - ROWS statement (COMPUTAB), 472
- ROWS statement

- COMPUTAB procedure, 471
- RSLB= option
 - PROC SEVERITY statement, 1544
- RTS= option
 - PROC COMPUTAB statement, 469
- RUNS option
 - MODEL statement (AUTOREG), 351
- S**
- S option
 - IRREGULAR statement (UCM), 2134
 - PROC SPECTRA statement, 1744
- SAMESCALE option
 - MODEL statement (MDC), 969
- SAR option
 - IRREGULAR statement (UCM), 2134
- SATISFY= option
 - SOLVE statement (MODEL), 1080
- SCALE= option
 - INPUT statement (SIMILARITY), 1655
- SCALEMODEL statement
 - SEVERITY procedure, 1548
- SCAN option
 - IDENTIFY statement (ARIMA), 232
- SCENTER option
 - MODEL statement (VARMAX), 2259
- SCHEDULE option
 - FIXED statement (LOAN), 919
- SCHEDULE= option
 - FIXED statement (LOAN), 919
- SCHEDULE= YEARLY option
 - FIXED statement (LOAN), 919
- SDATA= option
 - ENTROPY procedure, 715, 736
 - FIT statement (MODEL), 1069, 1185, 1264
 - SOLVE statement (MODEL), 1081, 1198, 1225
- SDIAG option
 - PROC SYSLIN statement, 1899
- SDIF= option
 - INPUT statement (SIMILARITY), 1655
 - TARGET statement (SIMILARITY), 1660
 - VAR statement (TIMESERIES), 2047
- SDIFF= option
 - IDENTIFY statement (X12), 2495
- SEASON statement
 - TIMESERIES procedure, 2040
 - UCM procedure, 2138
- SEASONALITY= option
 - PROC ESM statement, 760
 - PROC SIMILARITY statement, 1650
 - PROC TIMESERIES statement, 2032
- SEASONALMA= option
 - X11 statement (X12), 2510
- SEASONS= option
 - PROC FORECAST statement, 866
 - PROC X12 statement, 2483
- SECOND
 - function, 150
- SEED= option
 - MODEL statement (MDC), 969
 - QLIM procedure, 1460
 - SOLVE statement (MODEL), 1083, 1197
- SEIDEL option
 - SOLVE statement (MODEL), 1082
- SELECT, 1242
- SELECT option
 - ENDOGENOUS statement (QLIM), 1464
 - MODEL statement (TCOUNTREG), 1950
- SETID= option
 - LIBNAME statement (SASECRSP), 2583
 - LIBNAME statement (SASEXCCM), 2680
- SETMISSING= option
 - FORECAST statement (ESM), 762
 - ID statement (ESM), 765
 - ID statement (SIMILARITY), 1653
 - ID statement (TIMESERIES), 2040
 - INPUT statement (SIMILARITY), 1655
 - TARGET statement (SIMILARITY), 1660
 - VAR statement (TIMESERIES), 2047
- SEVERITY procedure, 1537
 - syntax, 1537
- SHORT= option
 - LIBNAME statement (SASEHAVR), 2774
- SICCD= option
 - LIBNAME statement (SASECRSP), 2588
- SIGCORR= option
 - PROC STATESPACE statement, 1846
- SIGMA= option
 - OUTLIER statement (ARIMA), 239
- SIGMALIM= option
 - X11 statement (X12), 2511
- SIGSQ= option
 - FORECAST statement (ARIMA), 241
- SIMILARITY procedure, 1646
 - syntax, 1646
- SIMLIN procedure, 1712
 - syntax, 1712
- SIMPLE option
 - PROC SYSLIN statement, 1899
- SIMULATE option
 - SOLVE statement (MODEL), 1082
- SIMULATE statement
 - COPULA procedure, 521
- SIN function, 1236
- SINGLE option
 - SOLVE statement (MODEL), 1082, 1218
- SINGULAR= option

- ESTIMATE statement (ARIMA), 238
- FIT statement (MODEL), 1072
- MODEL statement (TSCSREG), 2101
- PROC FORECAST statement, 866
- PROC STATESPACE statement, 1847
- PROC SYSLIN statement, 1899
- SINGULAR=option
 - MODEL statement (PANEL), 1355
- SINH function, 1236
- SINTPER= option
 - PROC FORECAST statement, 866
- SKIP option
 - ROWS statement (COMPUTAB), 473
- SKIPFIRST= option
 - ESTIMATE statement (UCM), 2129
 - FORECAST statement (UCM), 2131
- SKIPLAST= option
 - ESTIMATE statement (UCM), 2127
- SLAG option
 - LAG statement (PANEL), 1351
- SLAG statement
 - LAG statement (PANEL), 1351
- SLENTY= option
 - PROC FORECAST statement, 867
- SLIDE= option
 - TARGET statement (SIMILARITY), 1660
- SLOPE statement
 - UCM procedure, 2140
- SLSTAY= option
 - MODEL statement (AUTOREG), 356
 - PROC FORECAST statement, 867
- SMA option
 - IRREGULAR statement (UCM), 2134
- SOLVE statement
 - MODEL procedure, 1079
- SOLVEPRINT option
 - SOLVE statement (MODEL), 1084
- SORTNAMES option
 - PROC ESM statement, 760
 - PROC SIMILARITY statement, 1650
 - PROC TIMESERIES statement, 2032
- SOURCE= option
 - LIBNAME statement (SASEHAVR), 2774
- SP option
 - IRREGULAR statement (UCM), 2134
- SPAN= option
 - OUTLIER statement (X12), 2497
 - PROC X12 statement, 2483
- SPECTRA procedure, 1742
 - syntax, 1742
- SPECTRA statement
 - TIMESERIES procedure, 2041
- SPECTRUMSERIES= option
 - PROC X12 statement, 2483
- SPLINEREG
 - UCM procedure, 2141
- SPLINESEASON
 - UCM procedure, 2143
- SPSCALE option
 - MODEL statement (MDC), 969
- SQ option
 - IRREGULAR statement (UCM), 2134
- SQRT function, 1236
- SRESTRICT statement
 - SYSLIN procedure, 1904
- SSA statement
 - TIMESERIES procedure, 2043
- SSM procedure, 1775
 - syntax, 1775
- SSPAN statement
 - X11 procedure, 2421
- START= option
 - FIT statement (MODEL), 1064, 1112, 1257
 - FIXED statement (LOAN), 918
 - ID statement (ESM), 766
 - ID statement (SIMILARITY), 1653
 - ID statement (TIMESERIES), 2040
 - LIBNAME statement (SASEHAVR), 2773
 - MODEL statement (AUTOREG), 356
 - MONTHLY statement (X11), 2416
 - PROC FORECAST statement, 867
 - PROC SIMLIN statement, 1714
 - PROC X12 statement, 2484
 - QUARTERLY statement (X11), 2420
 - SOLVE statement (MODEL), 1081
- STARTITER option
 - FIT statement (MODEL), 1114
- STARTITER= option
 - FIT statement (MODEL), 1072
- STARTSUM= option
 - PROC ESM statement, 760
- STARTUP= option
 - MODEL statement (AUTOREG), 346
- STAT= option
 - FORECAST command (TSFS), 2988
- STATE statement
 - SSM procedure, 1781
- STATESPACE procedure, 1842
 - syntax, 1842
- STATIC option
 - FIT statement (MODEL), 1148
 - SOLVE statement (MODEL), 1081, 1146, 1194
- STATIONARITY= option
 - IDENTIFY statement (ARIMA), 233
 - MODEL statement (AUTOREG), 351
- STATS option
 - SOLVE statement (MODEL), 1084, 1212
- STB option

- MODEL statement (PDLREG), 1432
- MODEL statement (SYSLIN), 1902
- STD= option
 - HETERO statement (AUTOREG), 359
- STEST statement
 - SYSLIN procedure, 1906
- SUMBY statement
 - COMPUTAB procedure, 476
- SUMMARY option
 - MONTHLY statement (X11), 2416
 - QUARTERLY statement (X11), 2420
- SUMONLY option
 - PROC COMPUTAB statement, 469
- SUR option
 - ENTROPY procedure, 714
 - FIT statement (MODEL), 1067, 1090, 1260
 - PROC SYSLIN statement, 1899
- SYSLIN procedure, 1895
 - syntax, 1895
- T**
- T option
 - ERRORMODEL statement (MODEL), 1060, 1101
- TABLES statement
 - X11 procedure, 2422
 - X12 procedure, 2505
- TABLES table names
 - TABLES statement (X12), 2505
- TAN function, 1236
- TANH function, 1236
- TARGET statement
 - SIMILARITY procedure, 1656
- TAX= option
 - COMPARE statement (LOAN), 923
- TAXRATE= option
 - COMPARE statement (LOAN), 923
- TCCV= option
 - OUTLIER statement (X12), 2498
- TCOUNTREG procedure, 1944
 - syntax, 1944
- TCOUNTREG procedure, CLASS statement, 1948
- TCOUNTREG procedure, FREQ statement, 1949
- TCOUNTREG procedure, WEIGHT statement, 1953
- TCUSIP= option
 - LIBNAME statement (SASEXCCM), 2682
- TD COMPUTE= option
 - MONTHLY statement (X11), 2416
- TDCUTOFF= option
 - SSPAN statement (X11), 2421
- TDREGR= option
 - MONTHLY statement (X11), 2416
- TE1
 - OUTPUT statement (QLIM), 1468
- TE2
 - OUTPUT statement (QLIM), 1468
- TECH= option
 - ENTROPY procedure, 717
- TECHNIQUE= option
 - ENTROPY procedure, 717
- TEST statement
 - AUTOREG procedure, 363
 - ENTROPY procedure, 722
 - MODEL procedure, 1084
 - SYSLIN procedure, 1907
 - VARMAX procedure, 2244, 2275
- TEST= option
 - HETERO statement (AUTOREG), 359
- THEIL option
 - SOLVE statement (MODEL), 1084, 1212
- THRESHOLDPCT option
 - SSA statement (TIMESERIES), 2045
- TI option
 - COMPARE statement (LOAN), 923
- TICKER= option
 - LIBNAME statement (SASECRSP), 2588
- TIME
 - function, 150
- TIME option
 - MODEL statement (PANEL), 1355
- TIME= option
 - FIT statement (MODEL), 1069, 1152
 - SOLVE statement (MODEL), 1081, 1152
- TIMEID procedure, 1998
 - syntax, 1998
- TIMEPART function, 95, 150
- TIMESERIES procedure, 2026
 - syntax, 2026
- TIN=, 804
- _TITLES_ option
 - COLUMNS statement (COMPUTAB), 471
- TO= option
 - PROC EXPAND statement, 801, 805, 806
- TODAY function, 150
- TOL= option
 - ESTIMATE statement (X12), 2491
- TOTAL option
 - PROC SIMLIN statement, 1714
- TOUT=, 805
- TP option
 - MODEL statement (AUTOREG), 355
- TR option
 - MODEL statement (AUTOREG), 346
- TRACE option
 - PROC MODEL statement, 1054
- TRACE= option
 - FCMPOPT statement (SIMILARITY), 1651

- TRANSFORM statement
 - X12 procedure, 2505
- TRANSFORM=, 804
- TRANSFORM= option
 - ARIMA statement (X11), 2412
 - FORECAST statement (ESM), 762
 - INPUT statement (SIMILARITY), 1655
 - OUTPUT statement (AUTOREG), 362
 - OUTPUT statement (PDLREG), 1433
 - TARGET statement (SIMILARITY), 1661
 - VAR statement (TIMESERIES), 2047
- TRANSFORMIN= option
 - CONVERT statement (EXPAND), 804, 813
- TRANSFORMOUT= option
 - CONVERT statement (EXPAND), 805, 813
- TRANSIN=, 804
- TRANSOUT=, 805
- TRANSPOSE option
 - SSA statement (TIMESERIES), 2045
- TRANSPOSE procedure, 116
- TRANSPOSE= option
 - CORR statement (TIMESERIES), 2034
 - CROSSCORR statement (TIMESERIES), 2035
 - DECOMP statement (TIMESERIES), 2037
 - SEASON statement (TIMESERIES), 2041
 - TREND statement (TIMESERIES), 2046
- TREASNO= option
 - LIBNAME statement (SASEXCCM), 2682
- TREND statement
 - SSM procedure, 1784
 - TIMESERIES procedure, 2045
- TREND= option
 - DFPVALUE macro, 157
 - DFTEST macro, 159
 - MODEL statement (VARMAX), 2259
 - PROC FORECAST statement, 867
- TREND=LINEAR option
 - MODEL statement (VARMAX), 2333
- TRENDADJ option
 - MONTHLY statement (X11), 2416
 - QUARTERLY statement (X11), 2420
- TRENDMA= option
 - MONTHLY statement (X11), 2417
 - X11 statement (X12), 2511
- TRIMMISS= option
 - INPUT statement (SIMILARITY), 1656
- TRIMMISSING= option
 - INPUT statement (SIMILARITY), 1661
- TRUEINTEREST option
 - COMPARE statement (LOAN), 923
- TRUNCATED option
 - ENDOGENOUS statement (QLIM), 1463
- TSCSREG procedure, 2097
 - syntax, 2097
- TSFS, 2821
- TSFS procedure, 2821
- TSNAME = option
 - PROC PANEL statement, 1349
- TSVIEW
 - macro, 2985
- TUNECHLI= option
 - LIBNAME statement (SASEFAME), 2725
- TUNEFAME= option
 - LIBNAME statement (SASEFAME), 2725
- TWOSTEP option
 - MODEL statement (PANEL), 1355
- TYPE= option
 - FIT statement (MODEL), 1069
 - MODEL statement (AUTOREG), 346
 - MODEL statement (MDC), 969
 - OUTLIER statement (ARIMA), 239
 - OUTLIER statement (X12), 2498
 - PROC DATASOURCE statement, 618
 - PROC SIMLIN statement, 1714
 - SOLVE statement (MODEL), 1081
 - TEST statement (AUTOREG), 363
 - X11 statement (X12), 2511
- TYPE=option
 - BLOCKSEASON statement (UCM), 2123
 - SEASON statement (UCM), 2140
- U
- U option
 - ERRORMODEL statement (MODEL), 1061
- UCL= option
 - OUTPUT statement (AUTOREG), 362
 - OUTPUT statement (PDLREG), 1434
- UCLM= option
 - OUTPUT statement (AUTOREG), 362
 - OUTPUT statement (PDLREG), 1434
- UCM procedure, 2115
 - syntax, 2115
- UCM procedure, PROC UCM statement
 - PLOT option, 2118
- UL option
 - ROWS statement (COMPUTAB), 473
- UNIFORMEC= option
 - MODEL statement (MDC), 968
- UNIFORMPARM= option
 - MODEL statement (MDC), 968
- UNITSCALE= option
 - MODEL statement (MDC), 967
- UNITVARIANCE= option
 - MODEL statement (MDC), 970
- UNREST option
 - MODEL statement (SYSLIN), 1902
- UPPERBOUND= option

ENDOGENOUS statement (QLIM), 1463
 URSQ option
 MODEL statement (AUTOREG), 355
 USE= option
 FORECAST statement (ESM), 763
 USERDEFINED statement
 X12 procedure, 2507
 USSCP option
 PROC SYSLIN statement, 1899
 USSCP2 option
 PROC SYSLIN statement, 1899
 UTILITY statement
 MDC procedure, 978

V

VAR option
 MODEL statement (PANEL), 1353
 MODEL statement (TSCSREG), 2100
 VAR Statement
 COPULA procedure, 523
 VAR statement
 FORECAST procedure, 868
 MODEL procedure, 1086, 1228
 SPECTRA procedure, 1745
 STATSPACE procedure, 1849
 SYSLIN procedure, 1908
 TIMESERIES procedure, 2047
 X11 procedure, 2422
 X12 procedure, 2507
 VAR= option
 FORECAST command (TSFS), 2986, 2987
 IDENTIFY statement (ARIMA), 234
 TSVIEW command (TSFS), 2986, 2987
 VARDEF= option
 FIT statement (MODEL), 1067, 1092, 1105
 MODEL statement (VARMAX), 2259
 Proc ENTROPY, 714
 PROC SEVERITY statement, 1542
 PROC SYSLIN statement, 1900
 VARIANCE= option
 AUTOREG statement (UCM), 2122
 CYCLE statement (UCM), 2125
 IRREGULAR statement (UCM), 2132
 LEVEL statement (UCM), 2136
 RANDOMREG statement (UCM), 2138
 SLOPE statement (UCM), 2141
 SPLINEREG statement (UCM), 2142
 SPLINESEASON statement (UCM), 2144
 VARIANCE=option
 BLOCKSEASON statement (UCM), 2124
 SEASON statement (UCM), 2140
 VARLIST statement, 964
 VARMAX procedure, 2246

 syntax, 2246
 VCOMP= option
 MODEL statement (PANEL), 1355
 VDATA= option
 FIT statement (MODEL), 1069, 1186
 VNRRANK option
 MODEL statement (AUTOREG), 355

W

W option
 ARM statement (LOAN), 921
 WALD option
 TEST statement (ENTROPY), 723
 TEST statement (MDC), 977
 TEST statement (MODEL), 1085
 TEST statement (PANEL), 1357
 TEST statement (QLIM), 1469
 WEEK function, 150
 WEEKDAY
 function, 94
 WEEKDAY function, 150
 WEIGHT statement, 1130
 ENTROPY procedure, 723
 MODEL procedure, 1086
 SEVERITY procedure, 1548
 SYSLIN procedure, 1909
 WEIGHT= option
 PROC FORECAST statement, 867
 WEIGHTS option
 SPECTRA statement (TIMESERIES), 2043
 WEIGHTS statement
 SPECTRA procedure, 1745
 WHEN, 1242
 WHERE statement
 DATASOURCE procedure, 622
 WHITE option
 FIT statement (MODEL), 1071
 WHITENOISE= option
 ESTIMATE statement (ARIMA), 236
 IDENTIFY statement (ARIMA), 234
 WHITETEST option
 PROC SPECTRA statement, 1744
 WILDCARD= option
 LIBNAME statement (SASEFAME), 2722
 WISHART= option
 SOLVE statement (MODEL), 1083
 WORSTCASE option
 ARM statement (LOAN), 921

X

X11 procedure, 2406
 syntax, 2406

X11 statement
 X12 procedure, 2507
 X12 procedure, 2473
 syntax, 2473
 X12 procedure, PROC X12 statement
 PLOT option, 2479
 XBETA
 OUTPUT statement (COUNTREG), 566
 OUTPUT statement (QLIM), 1468
 OUTPUT statement (TCOUNTREG), 1952
 XBETA= option
 OUTPUT statement (MDC), 976
 XLAG option
 LAG statement (PANEL), 1351
 XLAG statement
 LAG statement (PANEL), 1351
 XLAG= option
 MODEL statement (VARMAX), 2265
 XPX option
 FIT statement (MODEL), 1071, 1121
 MODEL statement (PDLREG), 1432
 MODEL statement (SYSLIN), 1902
 XREF option
 PROC MODEL statement, 1053, 1246

Y

YEAR
 function, 94, 150
 YEARSEAS option
 OUTPUT statement (X12), 2498
 YRAHEADOUT option
 PROC X11 statement, 2409
 YYQ
 function, 94, 150

Z

ZERO= option
 COLUMNS statement (COMPUTAB), 471
 ROWS statement (COMPUTAB), 473
 ZEROMISS option
 PROC FORECAST statement, 867
 ZEROMISS= option
 FORECAST statement (ESM), 763
 INPUT statement (SIMILARITY), 1656
 TARGET statement (SIMILARITY), 1661
 ZEROMISSING= option
 ID statement (PROC ESM), 766
 ID statement (SIMILARITY), 1654
 ZEROMODEL statement
 COUNTREG procedure, 568
 TCOUNTREG procedure, 1954
 ZEROPROB= option

 PROC SEVERITY statement, 1545
 ZEROWEIGHT= option
 MONTHLY statement (X11), 2417
 QUARTERLY statement (X11), 2420
 ZGAMMA
 OUTPUT statement (COUNTREG), 567
 OUTPUT statement (TCOUNTREG), 1953
 ZLAG option
 LAG statement (PANEL), 1351
 ZLAG statement
 LAG statement (PANEL), 1351

Your Turn

We welcome your feedback.

- If you have comments about this book, please send them to **`yourturn@sas.com`**. Include the full title and page numbers (if applicable).
- If you have comments about the software, please send them to **`suggest@sas.com`**.

SAS® Publishing Delivers!

Whether you are new to the work force or an experienced professional, you need to distinguish yourself in this rapidly changing and competitive job market. SAS® Publishing provides you with a wide range of resources to help you set yourself apart. Visit us online at support.sas.com/bookstore.

SAS® Press

Need to learn the basics? Struggling with a programming problem? You'll find the expert answers that you need in example-rich books from SAS Press. Written by experienced SAS professionals from around the world, SAS Press books deliver real-world insights on a broad range of topics for all skill levels.

support.sas.com/saspress

SAS® Documentation

To successfully implement applications using SAS software, companies in every industry and on every continent all turn to the one source for accurate, timely, and reliable information: SAS documentation. We currently produce the following types of reference documentation to improve your work experience:

- Online help that is built into the software.
- Tutorials that are integrated into the product.
- Reference documentation delivered in HTML and PDF – **free** on the Web.
- Hard-copy books.

support.sas.com/publishing

SAS® Publishing News

Subscribe to SAS Publishing News to receive up-to-date information about all new SAS titles, author podcasts, and new Web site features via e-mail. Complete instructions on how to subscribe, as well as access to past issues, are available at our Web site.

support.sas.com/spn



**THE
POWER
TO KNOW®**

