

Installation Instructions for Platform Suite for SAS® Version 12.1 for UNIX



The correct bibliographic citation for this manual is as follows: SAS Institute Inc. 2021. *Installation Instructions for Platform Suite for SAS® Version 12.1 for UNIX*. Cary, NC: SAS Institute Inc.

Installation Instructions for Platform Suite for SAS® Version 12.1 for UNIX

Copyright © 2021, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a Web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513-2414.

December 2021

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit support.sas.com/bookstore or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

Table of Contents

Chapter 1 - Introduction	2
Architecture	3
Installation Directories.....	5
Pre-Installation Requirements	6
Chapter 2 - Installing Process Manager and LSF	7
Testing the Installation	19
Chapter 3 - Installing and Configuring LSF on Grid Nodes, SAS Foundation Grid Clients or UNIX	21
Testing the Installation	21
Adding Nodes or SAS Foundation Clients to the Grid	22
Converting a Grid Node Machine to a Grid Client	23
Adding a New Machine Type to the Grid	23
Setting up UNIX as a LSF Client Installation for Non-Access to a Shared Directory	24
Startup and Boot Setup for LSF and PM	25
Chapter 4 – Installing the Process Manager Client.....	27
Install the Process Manager Client	27
About this Task - Procedure	27
After Installing the Client	28
Chapter 5 - LSF Quick Reference	29
Check Cluster Configuration (lsadmin)	30
Find Out Cluster Status (lsid and lsload)	32
Check LSF Batch Configuration (badmin)	33
Find Out LSF Batch System Status (bhosts and bqueues).....	33
Verifying the Network Setup	35
Overview.....	35
Host Addresses	35
Host Connectivity	35
Host Ports	35
For More Information	36
Appendix – LDAP/PAM Authentication.....	37
Configure LDAP/PAM Authentication for Process Manager Server.....	37

Chapter 1 - Introduction

This document describes how to install the Platform Suite for SAS, version 12.1, on UNIX/Linux hosts for use with SAS products and solutions. The Platform Suite for SAS can be an individual addition to several SAS products and solutions to provide enterprise-level scheduling capabilities on a single server environment. The Platform Suite for SAS is also included as part of the SAS Grid Manager for Platform product to enable:


- distributed enterprise scheduling
- workload balancing
- parallelized workload balancing

The Platform Suite for SAS includes the following components:

- **Process Manager** – the interface used by the SAS scheduling framework to control the submission of scheduled jobs to LSF (Load Sharing Facility) which manages any dependencies between the jobs. The Flow Manager and Calendar Editor clients are included with Process Manager and may be optionally installed. These clients are not required by SAS; however, they do provide additional functionality.
 - **Flow Manager** - provides a visual representation of flows that have been created for a Process Manager Server. These include flows that were created and scheduled in SAS Management Console's Schedule Manager, as well as reports that have been scheduled through SAS Web Report Studio. Platform Flow Manager provides information about each flow's status and associated dependencies. You can view or update the status of jobs within a flow, and you can run or rerun a single job regardless of whether the job failed or completed successfully.
 - **Calendar Editor** - a scheduling client for a Process Manager Server. This client enables you to create new calendar entries for time dependencies for jobs that are scheduled to run on the server. You can use it to create custom versions of the calendars that are used to create time dependencies for jobs.
- **LSF** – dispatches all jobs submitted to it, either by Process Manager or directly by SAS, and returns the status of each job. LSF also manages any resource requirements and performs load balancing across machines in a grid environment.

Architecture


SAS® Scheduling Architecture

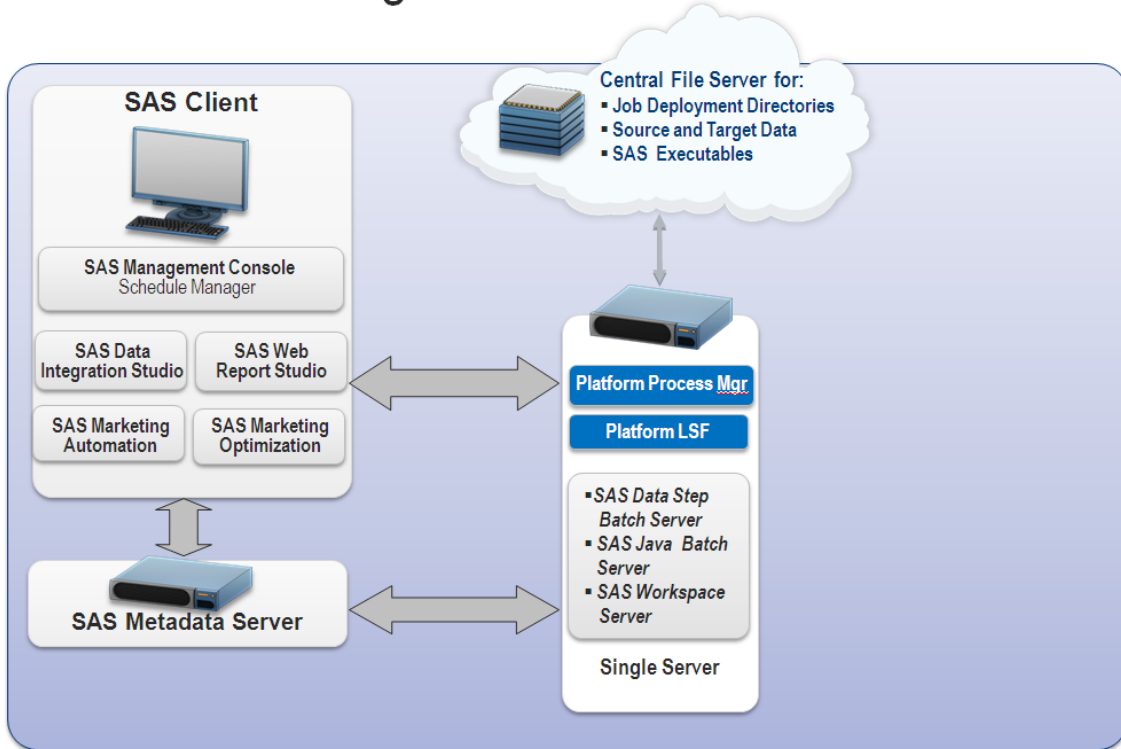

Copyright © 2010, SAS Institute Inc. All rights reserved.

Job scheduling on a single machine requires that you install Platform Process Manager 10.29. During the Process Manager install, you are to install Platform LSF 10.19. See “Chapter 2 - Installing Process Manager and LSF” for the instructions on installing on a single server.

SAS® Grid Computing Architecture

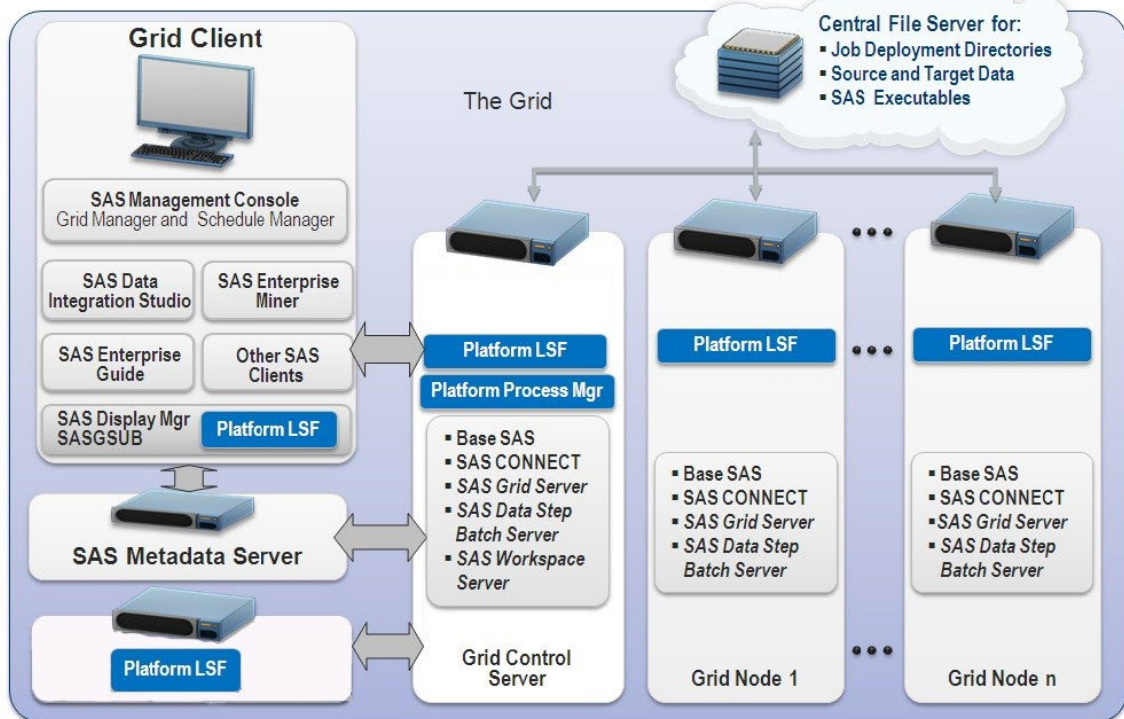

Copyright © 2010, SAS Institute Inc. All rights reserved.

* Linux and Windows only; see system requirements

Several types of machines make up a SAS grid environment. These machines have been defined to clarify the software components that must be installed on each one as well as the SAS metadata that must be configured. The SAS Metadata Server is shown on a separate machine in this sample architecture. It is common to dedicate a machine to running the SAS Metadata Server, but you may choose to run the metadata server on the grid control server. The three machine types specific to a grid installation are defined as follows:

- **grid client** - a grid client submits work to the grid but is not part of the grid resources available to execute work. Examples of a grid client include:
 - a SAS Data Integration Studio client (Platform LSF not installed on this client machine)
 - a SAS Enterprise Miner client (Platform LSF not installed on this client machine)
 - a SAS Management Console client using the Schedule Manager plug-in or any other applications scheduling SAS workflows (Platform LSF not installed on this client machine)
 - a SAS Foundation install (minimum Base SAS, SAS/CONNECT, and Platform LSF) used to run a program that submits work—both whole programs or programs separated into parallel segments which are programs separated into parallel segments to the grid. Installation of the Platform LSF component is required in this case in order for SAS/CONNECT to submit the work to the grid.
- **grid control server** - any machine in the grid can be designated as the grid control server. More software is installed on the grid control server and more SAS metadata configuration takes place on this machine. You are to start the installation of the Platform Suite for SAS on

this machine. In a SAS Data Integration Studio and SAS Enterprise Miner scenario the grid control server runs a workspace server that executes programs that utilize SAS/CONNECT to distribute work to the grid nodes. The grid control server can be configured as a grid resource capable of receiving work to execute or not, depending on the needs of your environment.

- **grid node** - a grid node is a grid computing resource capable of receiving the work that is being distributed. Each grid node must be running a minimum of Base SAS, SAS/CONNECT and Platform LSF.

Installation of Platform Suite for SAS is performed first on the grid control server and is followed by installation on all of the grid node machines. Installation of Platform LSF on the grid control server can be installed as a part of the Process Manager installation or it can be installed by itself. This document only shows LSF being installed as part of the Process Manager installation.

Machines that do processing for the grid as well as machines that submit jobs to run on the grid must have Platform LSF installed. Grid clients such as SAS Data Integration Studio or SAS Enterprise Miner do not submit jobs directly but rather work with a SAS workspace server or a stored process server that does the job submission. Since those grid clients do not submit jobs, they do not need Platform LSF installed, but the machine where the workspace server or stored process server would need it installed. If you are writing your own grid-enabled SAS program in SAS Foundation and want to run the program, that grid client workstation must have Platform LSF installed since it processes the actual submission of jobs to the grid.

This document is designed to assist you with installing Platform Suite for SAS to create a computer cluster and enable the cluster to work with the SAS Business Intelligence Platform. Please refer to the *Grid Computing in SAS document*, located at <http://support.sas.com/documentation/onlinedoc/gridmgr/index.html>.

SAS Grid Manager for Platform Control Server requires Platform Process Manager 10.29. Platform LSF 11.19 is to be installed during the Platform Process Manager 12.1 installation. See “Chapter 2 - Installing Process Manager and LSF” for the instructions on installing Process Manager and LSF. SAS Grid Manager for Platform Node and SAS Grid Manager for Platform Client require only Platform LSF 11.19. See “Chapter 3 - Installing LSF on Grid Nodes, SAS Foundation Grid Clients” for the instructions on installing LSF.

Note: Software updates for SAS OEM version should use <http://ftp.sas.com/techsup/download/hotfix/platformpatch.html> and not <https://www.ibm.com/support/fixcentral/>.

Installation Directories

Caution: Do not install Process Manager and LSF to the same directory.

Installing Platform Suite for SAS produces the following directory structure:

- JS_TOP is the local directory in which the Process Manager Server and Client files are installed, (for example, /usr/share/pm).
- LSF_TOP is the shared directory in which LSF files are installed (for example, /usr/share/lsf). Generally, LSF_TOP is mounted from a file server and all files associated with LSF (state files, binaries for the different architectures, configuration files) are stored in

this file share. `LSF_TOP` must be a shared directory between all the machines in the grid. For increased high availability this file server could be a machine that is not part of the grid.

- Machine-dependent files are installed under `LSF_TOP/<version>/platform_name`. These directories and the files underneath represent the machine-dependent files. Machine-dependent files are specific to a particular host type and are the LSF command binaries, server daemons, libraries, and utilities.
- Machine-independent files are independent of the host type and are shared by all host types (main pages, configuration files, include files, examples, etc.)

Pre-Installation Requirements

1. If installing Platform Suite for SAS for use with SAS Grid Manager for Platform, read the Platform Web Services deployment documentation.
<http://support.sas.com/documentation/cdl/en/gridref/69583/HTML/default/p1ad54icxt53fxn1wltw5tcbsplq.htm>.
2. Ensure that the SAS install user account exists. If not, create it. The user account `sas` will be used throughout this document as an example where a specific user account name is necessary for clarity. It is recommended that the same operating system account be used to deploy both SAS and Platform LSF. Separate accounts *can* be used but doing so means that a patch will be required in order to run Platform Web Services. See the Platform Web Services deployment documentation for details.
3. Contact your system administrator to create a network share that all computers on your cluster can access. This can be an NFS mount, a directory on a SAN, an SMBFS/CIFS mount, or any other method of creating a directory that is shared among all the machines in the grid. All machines in the grid must be able to access this share at boot time, so have your system administrator set that up based on the type of share. All machines in the grid must also have root access, since any machine may become the grid master. All grid users must be able to read the share at runtime. This is referred to as `LSF_TOP`, the LSF top-level installation directory. This installation concludes that `LSF_TOP` is mounted on each machine as `/usr/share/lsf`. Make sure `root` has read/write access to this subdirectory.
4. Create a directory on the grid control server that contains the Process Manager files. This is referred to as `JS_TOP`, the Process Manager top-level installation directory. This installation concludes that `JS_TOP` is `/usr/share/pm`.
5. Make a list of the names of all the computers that participate in the cluster.
6. Choose a name for the cluster.
7. Locate the `SAS9*_*.txt` and `LSF*_*.txt` file located in the `sid_files` directory in your SAS Software Depot. The `LSF*_*.txt` file is to license all components of Platform Suite for SAS in scheduling capabilities on a single server environment. The `SAS9*_*.txt` is to license all the components of Platform Suite for SAS as part of the SAS Grid Manager for Platform.
8. Determine the types of all computers in the grid using `uname -a` so that the correct tar files can be copied for the install. This allows you to determine the subdirectory in your SAS Software Depot that contains the software for all the UNIX operating system types and CPU architectures in the grid. The files are in the third-party directory of the SAS Software Depot.

For the Process Manager installation files, under the `third_party` directory, navigate to `Platform_Process_Manager`, then, to `10_29` under which you will find directories named for the operating environment on which you are installing. For the purposes of these instructions, we chose to use Linux for x64 as the operating environment. The installation file names are:

Process Manager installation files:
`pm10.2.0.9_sas_1nx26-x64.tar`

As an example, if the grid control server is a Linux for x64 system, the following tar files are needed:

- `Platform_Process_Manager/10_29/Linux_for_x64/pm10.2.0.9_sas_1nx26-x64.tar`

Note: *The Process Manager installation files include the LSF installation files.*

Process Manager Client Only tar files:
`pm10.2.0.9_clt_sas_1nx26-x64.tar.Z`
`pm10.2.0.9_sas_pinstall.tar.Z`

9. `libstdc++.so.6` is required to install Process Manager on Linux/UNIX.
10. If your operating system performs user authentication against an LDAP/PAM server, you are required to make some configuration changes to allow PM to use the PAM interface. The instructions for making those configuration changes are located in the appendix.
11. LSF uses RSH/RLOGIN by default to execute certain commands on machines in the grid. If you would prefer to use SSH, please refer to the “Encrypt transmission of LSF commands for remote execution and login” section of the Platform LSF Security document for a list of required changes.

Chapter 2 - Installing Process Manager and LSF

Caution: *Do not install Process Manager and LSF to the same directory.*

1. Log on to the machine as the Primary LSF administrator.
2. If you are performing an upgrade of Platform Suite for SAS or SAS Grid Manager for Platform in place, make sure that Process Manager and LSF are shut down prior to performing this activity.

For Process Manager, Run `jadmin stop`.

For LSF:

- Deactivate all queues to make sure that no new jobs can be dispatched during the upgrade. After you complete the upgrade, remember to activate the queues again so pending jobs can be dispatched.
 - Deactivate all LSF queues by running the following command:
`badmin qinact all`

- Back up your existing **LSF_CONFDIR**, **LSB_CONFDIR** and **LSB_SHARDIR** parameters according to the procedures at your site.
 - run lfsshutdown.
3. If you are performing an upgrade from PSS10.1 or PSS11.1 to PSS12.1, you must rename the LSF_TOP/10.1 directory to LSF_TOP/9.1.
 4. Create a Process Manager install directory (such as /local/pm_install) to hold the installation files.
 5. Copy the Platform_Process_Manager/10_29/*.tar files from the appropriate location (see step 8 from the pre-installation requirements section) to the install directory. The pm10.2.0.9_*.tar_files contain both LSF and PM media.

There are multiple files for each UNIX-based OS/CPU:

pm10.2.0.9_sas.<operating environment>.tar – installer tar file for your platform host.

- install.config – configuration file where you define your installation prior to installing
 - jsinstall – installation script for installing the Process Manager Client
6. Change the working directory to the Process Manager install directory.
- Extract the pm10.2.0.9_sas.<operating environment>.tar file. For example, you can use the command `tar xvf Platform_Process_Manager /10_29/<operating environment>/ pm10.2.0.9.<operating environment>.tar`. This is designed to create a pm10.29_sas_pinstall subdirectory in the Process Manager install directory.
7. Change to the pm10.29_sas_pinstall subdirectory.
 8. Copy the license file obtained from SAS (see step 7 from the pre-installation requirements section) into the current directory and rename it license.dat.
 9. Edit the install.config file and change the following sections. If you are upgrading your installation, retain the values for:

a. JS_TOP

To upgrade, install IBM Spectrum LSF Process Manager (Process Manager) to the same location in which the previous version of Process Manager is installed (specify the same JS_TOP). The installer will preserve your existing work data and configuration.

- b. JS_HOST
- c. JS_PORT
- d. JS_ADMINS
- e. JS_CONTROL_ADMINS
- f. JS_MAILHOST

For more information see, “Chapter 1: Managing Your Cluster,” “Add a host of a new type using lsfinstall” section, in the *Administering IBM Spectrum LSF* document found in the docs directory of your SAS Software Depot containing Platform LSF.

Note: In a majority of SAS installation and configuration environments, JS_‘name descriptions’ and LSF ‘name descriptions’ as shown below are required. If the lines that contain these variables are not already uncommented, uncomment each line by removing the number sign (#).

Required Section	Description
JS_TOP	Directory to install Process Manager. This does not need to be a network share but recommended. For example: JS_TOP=/usr/share/pm
JS_HOST	Host that is assigned to be the Process Manager host. Specify the machine’s fully qualified domain name (FQDN). For a grid installation this is in place to be the grid control server.
JS_ADMINS	Space-delimited list of user IDs that will serve as LSF administrators. It is recommended that the SAS install account be used as the Primary LSF administrator, which is the first name in the list. Examples: JS_ADMINS=sas,sas_admin1
LSF_INSTALL	Flag indicating whether to install LSF. This must be “true”.
LSF_TOP	Network share containing the LSF installation mentioned in the pre-installation requirements. For example: LSF_TOP=/usr/share/lsf
LSF_CLUSTER_NAME	Name of cluster. For example: LSF_CLUSTER_NAME=sas_cluster
LSF_MASTER_LIST	List of servers that are going to participate as master candidates. The first server in the list is considered the default LSF master machine. The master list should be in the order of how the user prefers the cluster master succession should be listed. For example, HOSTA, HOSTB, and HOSTC means that HOSTA is the default master. When HOSTA expires, HOSTB will be the master and so on. The LSF master machine is the grid control server for a grid installation and the machine containing Process Manager.
LSF_ADD_SERVERS	List of servers that are going to participate in the cluster that are not required to be included as master candidates.
LSF_ADD_CLIENTS	List of hosts that only submit jobs to the grid.

10. Optional sections can be specified as shown below:

Note: If you are updating the version of Platform Process Manager, you may want to backup your JS_WORK_DIR and restore it after completing the new installation.

Optional Section	Description
JS_PORT	Process Manager port number. Use default of 1966 unless it is in use by another program.
JS_TARDIR	Path of directory to Process Manager distribution files. If not used, the tar files are expected to be in the current directory running jsinstall .
JS_LICENSE	Full path to Process Manager/LSF license file. If not used, the <code>license.dat</code> file is expected to be in the current directory running jsinstall .
JS_MAILHOST	The name of the mail server host if you want to receive email notices from LSF. For example: JS_MAILHOST=[SMTP Exchange:]hostname
LSF_TARDIR	Path of directory to architecture specific tar files. If not used, the tar files are expected to be in the current directory running jsinstall .
JS_WORK_DIR	Full path to where the work data is stored. If not specified, defaults to JS_HOME/work.

```
# -----
JS_TOP=/usr/share/pm
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
JS_HOST=myhost
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
# JS_PORT=
# -----
# OPTIONAL. The default port number is 1966.

# -----
JS_ADMINS=sas
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
LSF_INSTALL=true
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
LSF_TOP="/usr/share/lsf"
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
LSF_CLUSTER_NAME="sas_cluster"
# -----
# REQUIRED. You must uncomment this keyword and specify a value.

# -----
LSF_MASTER_LIST="myhost"
# -----
```

The resulting file contains content similar to this example:

11. Change to the **root** user and execute the command `./jsinstall -f install.config`. Doing so installs LSF first, and then, Process Manager. A directory is created for each component and an `Install.log` file is created in each directory. All the events of the installation are logged here.

```
$ ./jsinstall -f install.config
Starting jsinstall...
Verifying the working directory...
Reading configuration file...
Updating JS and LSF config files.
This may take a few minutes...
```

12. Read and agree to the LSF End User License Agreement.

```
International Program License Agreement

Part 1 - General Terms

BY DOWNLOADING, INSTALLING, COPYING, ACCESSING, CLICKING ON
AN "ACCEPT" BUTTON, OR OTHERWISE USING THE PROGRAM,
LICENSEE AGREES TO THE TERMS OF THIS AGREEMENT. IF YOU ARE
ACCEPTING THESE TERMS ON BEHALF OF LICENSEE, YOU REPRESENT
AND WARRANT THAT YOU HAVE FULL AUTHORITY TO BIND LICENSEE
TO THESE TERMS. IF YOU DO NOT AGREE TO THESE TERMS,

* DO NOT DOWNLOAD, INSTALL, COPY, ACCESS, CLICK ON AN
"ACCEPT" BUTTON, OR USE THE PROGRAM; AND

* PROMPTLY RETURN THE UNUSED MEDIA, DOCUMENTATION, AND

Press Enter to continue viewing the license agreement, or
enter "1" to accept the agreement, "2" to decline it, "3"
to print it, "4" to read non-IBM terms, or "99" to go back
to the previous screen.
1
```

13. When asked which architecture specific tar files to install, include all tar files for all OS/CPU machine types in your cluster.

```
LSF pre-installation check ...

Checking the LSF TOP directory /usr/share/lsf ...
... Done checking the LSF TOP directory /usr/share/lsf ...

You are installing IBM Spectrum LSF - 10.1 Standard Edition.

Checking LSF Administrators ...
  LSF administrator(s): "sas"
  Primary LSF administrator: "sas"
Checking the configuration template ...
CONFIGURATION_TEMPLATE not defined. Using DEFAULT template.
  Done checking configuration template ...
  Done checking ENABLE_STREAM ...
  Done checking ENABLE_CGROUP ...
  Done checking ENABLE_GPU ...

Checking the patch history directory ...
Creating /user/share/lsf/patch ...
... Done checking the patch history directory /user/share/lsf/patch ...

Checking the patch backup directory ...
... Done checking the patch backup directory /user/share/lsf/patch/backup ...

Searching LSF 10.1 distribution tar files in /local/pm-
install/pm10.29_sas_pinstall Please wait ...

  1) linux2.6-glibc2.3-x86_64

Press 1 or Enter to install this host type: 1

You have chosen the following tar file(s):
  lsf10.1.0.9_linux2.6-glibc2.3-x86_64

Checking selected tar file(s) ...
... Done checking selected tar file(s).
```

14. Wait while the install unpacks the architecture specific files, creates the LSF working directories, adds server hosts, configures the cluster, configures the license file, and creates the `lsf_getting_started.html` and `lsf_quick_admin.html` files.

```

Pre-installation check report saved as text file:
/install/pm_install/pm10.29_sas_pinstall/lsf10.1_lsfinstall/prechk.rpt.

... Done LSF pre-installation check.

Installing LSF binary files " lsf10.1.0.9_linux2.6-glibc2.3-x86_64"...
Creating /usr/share/lsf/10.1 ...

Copying lsfinstall files to /usr/share/lsf/10.1/install
Creating /usr/share/lsf/10.1/install ...
Creating /usr/share/lsf/10.1/install/scripts ...
Creating /usr/share/lsf/10.1/install/instlib ...
Creating /usr/share/lsf/10.1/install/patchlib ...
Creating /usr/share/lsf/10.1/install/lap ...
Creating /usr/share/lsf/10.1/install/conf_tmpl ...
... Done copying lsfinstall files to /usr/share/lsf/10.1/install

Installing linux2.6-glibc2.3-x86_64 ...

Please wait, extracting lsf10.1.0.9_linux2.6-glibc2.3-x86_64 may take up to a few minutes ...

... Adding package information to patch history.
... Done adding package information to patch history.
... Done extracting /install/pminstall/pm10.29_sas_pinstall/lsf10.1.0.9_linux2.6-glibc2.3-
x86_64.tar.Z....

Creating links to LSF commands ...
... Done creating links to LSF commands ...

Modifying owner, access mode, setuid flag of LSF binary files ...
... Done modifying owner, access mode, setuid flag of LSF binary files ...

Creating the script file lsf_daemons ...
... Done creating the script file lsf_daemons ...

... linux2.6-glibc2.3-x86_64 installed successfully under /usr/share/lsf/10.1.

... Done installing LSF binary files "linux2.6-glibc2.3-x86_64".

Creating LSF configuration directories and files ...
Creating /usr/share/lsf/work ...
Creating /usr/share/lsf/log ...
Creating /usr/share/lsf/conf ...
Creating /usr/share/lsf/conf/lsbatch ...
... Done creating LSF configuration directories and files ...

Creating a new cluster "sas_cluster" ...
Adding entry for cluster sas_cluster to /usr/share/lsf/conf/lsf.shared.
Installing lsbatch directories and configurations ...
Creating /usr/share/lsf/conf/lsbatch/sas_cluster ...
Creating /usr/share/lsf/conf/lsbatch/sas_cluster/configdir ...
Added user group "lsfadmins" containing all cluster administrators.
Added host group "master_hosts" containing all master candidate hosts.

```

```
Creating /usr/share/lsf/work/sas_cluster ...
Creating /usr/share/lsf/work/sas_cluster/logdir ...
Creating /usr/share/lsf/work/sas_cluster/live_confdir ...
Creating /usr/share/lsf/work/sas_cluster/lsf_indir ...
Creating /usr/share/lsf/work/sas_cluster/lsf_cmddir ...

Adding server hosts ...

Host(s) "bb04cnt08" has (have) been added to the cluster "sas_cluster".

Adding LSF_MASTER_LIST in lsf.conf file...

... LSF configuration is done.
... Creating EGO configuration directories and files ...
Creating /usr/share/lsf/conf/ego ...
Creating /usr/share/lsf/conf/ego/sas_cluster ...
Creating /usr/share/lsf/conf/ego/sas_cluster/kernel ...
Creating /usr/share/lsf/work/sas_cluster/ego ...
... Done creating EGO configuration directories and files.
Configuring EGO components...
... EGO configuration is done.
... Creating resource connector configuration directories and files ...
Creating /usr/share/lsf/conf/resource_connector ...
Creating /usr/share/lsf/conf/resource_connector/ego ...
Creating /usr/share/lsf/conf/resource_connector/openstack ...
Creating /usr/share/lsf/conf/resource_connector/aws ...
Creating /usr/share/lsf/conf/resource_connector/softlayer ...
Creating /usr/share/lsf/conf/resource_connector/azure ...
Creating /usr/share/lsf/conf/resource_connector/google ...
... Done creating resource connector configuration directories and files.
... Finished resource connector configuration.

... LSF inventory tag file is installed.
... LSF license file is installed.
Creating lsf_getting_started.html ...
... Done creating lsf_getting_started.html

Creating lsf_quick_admin.html ...
... Done creating lsf_quick_admin.html

lsfinstall is done.

To complete your LSF installation and get your
cluster "sas_cluster" up and running, follow the steps in
"/tmp/sas_cluster_psfs_install.2104/pminstall/pm10.29_sas_pinstall/lsf10.1.0.9_lsfinstall/lsf_getting_st
arted.html".

After setting up your LSF server hosts and verifying
your cluster "sas_cluster" is running correctly,
see "/usr/share/lsf/10.1/lsf_quick_admin.html"
to learn more about your new LSF cluster.

After installation, remember to bring your cluster up to date
by applying the latest updates and bug fixes.
```


15. If the `LSF_STARTUP_PATH` parameter in the `/etc/lsf.sudoers` file is set to an earlier LSF version, you must update the `LSF_STARTUP_PATH` parameter to the `LSF_SERVERDIR` directory for LSF <version> on all the hosts where it is configured.
16. After the LSF install completes, the Process Manager installation starts. You will see the following progress window:

```
Starting JS installation...

Logging installation sequence in
/install/pminstall/pm10.29_sas_pinstall/pm10.29_install/Install.log
Searching for Process Manager tar files in /install/pminstall/pm10.29_sas_pinstall,
Please wait ...

    1) [SAS] Linux2.6-glibc2.3-x86_64 Server
    2) [SAS] Linux2.6-glibc2.3-x86_64 Client

List the numbers separated by spaces that you want to install.
(e.g. 1 3 7, or press Enter for all):
```

Type `1 2` to install the Process Manager Server and Client. Press **Enter** to continue.

17. The install extracts files, creates directories, and modifies access to files. After all operations have been performed, you see the following progress window:

```
You have chosen the following tar file(s):
pm10.29_svr_sas_lnx26-x64
pm10.29_clt_sas_lnx26-x64

Space required to install: 300000 kb.
Space available under /install/cfgsas1/pm11: 71480876 kb.
Do you want to continue installation? (y/n) [y] y
Info: Re-using JRE from LSF install...
International Program License Agreement
```

18. Read and agree to the LSF End User License Agreement.

```
Part 1 - General Terms

BY DOWNLOADING, INSTALLING, COPYING, ACCESSING, CLICKING ON
AN "ACCEPT" BUTTON, OR OTHERWISE USING THE PROGRAM,
LICENSEE AGREES TO THE TERMS OF THIS AGREEMENT. IF YOU ARE
ACCEPTING THESE TERMS ON BEHALF OF LICENSEE, YOU REPRESENT
AND WARRANT THAT YOU HAVE FULL AUTHORITY TO BIND LICENSEE
TO THESE TERMS. IF YOU DO NOT AGREE TO THESE TERMS,

* DO NOT DOWNLOAD, INSTALL, COPY, ACCESS, CLICK ON AN
"ACCEPT" BUTTON, OR USE THE PROGRAM; AND

* PROMPTLY RETURN THE UNUSED MEDIA, DOCUMENTATION, AND

Press Enter to continue viewing the license agreement, or
```

```
enter "1" to accept the agreement, "2" to decline it, "3"
to print it, "4" to read non-IBM terms, or "99" to go back
to the previous screen.
1
```

19. The install extracts files, creates directories, and modifies access to files. After all operations have been performed, you see the following progress window:

```
Process Manager pre-installation check ...

Checking the JS_TOP directory /usr/share/pm ...
... Done checking the JS_TOP directory /usr/share/pm ...
Checking selected tar file(s) ...
... Done checking selected tar file(s).

Checking Process Manager Administrators ...
  Process Manager administrator(s):      "sasadm sasadm2"
  Primary Process Manager administrator:  "sasadm"

Checking Process Manager Control Administrators ...

/install/pminstall/pm10.29_sas_pinstall/license.dat includes SAS license.
... Done checking the license ...

Pre-installation check report saved as text file:
/install/pminstall/pm10.29_sas_pinstall/pm10.29_install/prechk.rpt.

... Done Process Manager pre-installation check.

Installing binary files " pm10.1_svr_sas_lnx26-lib23-x64 pm10.1_clt_sas_lnx26-
lib23-x64"...
Creating /usr/share/pm/10.29 ...

Copying jsinstall files to /usr/share/pm/10.29/install
Creating /usr/share/pm/10.29/install ...
Creating /usr/share/pm/10.29/install/instlib ...
... Done copying jsinstall files to /usr/share/pm/10.29/install

Installing linux2.6-glibc2.3-x86_64 Server...

Please wait, extracting pm10.29_svr_sas_lnx26-lib23-x64 may take up to 5 minutes
...

... Done extracting /install/pminstall/pm10.29_sas_pinstall/pm10.29_svr_sas_lnx26-
lib23-x64.tar.Z.

... linux2.6-glibc2.3-x86_64 Server installed successfully under
/usr/share/pm/10.29.

Installing linux2.6-glibc2.3-x86_64 Client...

Please wait, extracting pm10.29_clt_sas_lnx26-lib23-x64 may take up to 5 minutes
...

... Done extracting /install/pminstall/pm10.29_sas_pinstall/pm10.29_clt_sas_lnx26-
lib23-x64.tar.Z.
```

```
... linux2.6-glibc2.3-x86_64 Client installed successfully under
/usr/share/pm/10.29.

Modifying owner, access mode of binary files ...

... Done modifying owner, access mode of binary files ...

Done installing binary files ...
Creating /usr/share/pm/work/templates ...

Creating configuration directories and files ...
Creating /usr/share/pm/work/alarms ...
Creating /usr/share/pm/log ...
Creating /usr/share/pm/conf ...
... Done creating configuration directories and files ...

Adding queue unicodcmd to
/usr/share/lsf/conf/lsbatch/sas_cluster/configdir/lsb.queues

Done creating configuration directories and files ...

... Process Manager license setup is done.
Creating /usr/share/pm/work/calendar/ ...
Creating /usr/share/pm/10.29/examples/flowdefs/ ...
Creating /usr/share/pm/properties/version ...
Please read /usr/share/pm/README for instructions on how
to start the Process Manager

jsinstall completed successfully. Done.
```

20. Change into the <LSF_TOP>/<version> /install subdirectory (for example, /usr/share/lsf/10.29/install). Run the following command to set up the proper initialization files for future reboots:

```
./hostsetup --top="/usr/share/lsf" --boot="y" --profile="y"
--start="y"
```

Note: There are two dashes "--" in the options. See "Chapter 5 – LSF Quick Reference" for more information on the hostsetup command.

```
$ # ./hostsetup --top="/usr/share/lsf" --boot="y" --profile="y" --start="y"
Logging installation sequence in /usr/share/lsf/10.1/log/Install.log

-----
      L S F      H O S T S E T U P      U T I L I T Y
-----

This script sets up local host (LSF server, client or slave) environment.

Setting up LSF server host "myhost" ...
Checking LSF installation for host "myhost" ... Done
Installing LSF RC scripts on host "myhost" ... Done
LSF service ports are defined in /usr/share/lsf/conf/lsf.conf.
Checking LSF service ports definition on host "myhost" ... Done

... Setting up LSF server host "myhost" is done
... LSF host setup is done.
$
```

Note: Host setup does not require the profile be sourced.

21. Type `ps -ef | grep <LSF_TOP>` and make sure all daemons are running. Note that **mbatchd** and **mschd** only run on the master machine, therefore, they may not show up.

```
$ . profile.lsf
$ lsadmin limstartup
Starting up LIM on <myhost> ..... done
$ lsadmin resstartup
Starting up RES on <myhost> ..... done
$ badmin hstartup
Starting up slave batch daemon on <myhost> ..... done
$ ps -ef | grep /usr/share/lsf
root      12910      1  0 10:47 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/lim
root      12911 12910  0 10:48 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/pim
root      12912 12910  0 10:48 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/pem
          sas 12913 12910  0 10:48 ?                00:00:00
/usr/share/lsf/10.29/linux2.6.0.1-glibc2.3-x86_64/etc/vemkd
          sas 12919 12913  0 10:48 ?                00:00:00
/usr/share/lsf/10.29/linux2.6.0.1-glibc2.3-x86_64/etc/egosc
root      12926      1  0 10:48 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/res
root      12930      1  0 10:48 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/sbatchd
root      12934 12930  0 10:48 ?                00:00:00 /usr/share/lsf/10.29/linux2.6.0.1-
glibc2.3-x86_64/etc/mbatchd -d /usr/share/lsf/conf
          sas 12941 12934  0 10:48 ?                00:00:00
/usr/share/lsf/10.29/linux2.6.0.1-glibc2.3-x86_64/etc/mbschd
root      12962 28334  0 10:49 pts/1    00:00:00 grep /usr/share/lsf
$
```

22. Start up the Process Manager Server. This can be done easily by rebooting the computer or doing the following as root:
 - a. Set up the Process Manager environment by sourcing the `profile.js` file. This can be done by executing the following command: `. <JS_TOP>/conf/profile.js`. Please note the period `'.'` which is the command to 'source' the file.

Note: Since all Process Manager commands require the environment set up by sourcing the `profile.js` file, it is best practice to source the `profile.js` file in the default profile for the shell.
 - b. Start the **jfd** daemons with the command `jadmin start`.
 - c. To start the **jfd** daemon at boot time, run the command `bootsetup` located in `JS_TOP/10.2/install`.
 - d. Type `ps -ef | grep jfd` and make sure the daemon is running.

```

$ jadmin start
Starting up jfd ...
$ cd ../10.29/install
$ bootsetup
Logging installation sequence in /usr/share/pm/10.29/install/Install.log
Copying /etc/init.d/jstartup, /etc/init.d/rc5.d/S96jstartup and
/etc/init.d/rc4.d/K05jstartup
Installing Process Manager RC scripts on host "disuse" ... Done
... Process Manager boot setup is done.
$ ps -ef | grep jfd
      sas   16417      1  0 15:03 ?          00:00:00
/usr/share/pm/10.29/linux2.6.0.1-glibc2.3-x86_64/etc/jfd
root    16566    944  0 15:04 pts/0    00:00:00 grep jfd
$

```

23. Reactivate all LSF queues (Deactivated in Step 2) by running the following command: `badadmin_qact_all`.

Testing the Installation

Once the system has rebooted, you can follow these steps to make sure LSF on the grid control server or scheduling server is operating properly.

1. Log onto the machine as an LSF administrator or user.
2. Make sure the LSF daemons are running by executing the command `ps -ef | grep <LSF_TOP>`. This lists multiple daemons such as **lim**, **pim**, **res**, **sbatchd**, **mbatchd** and **mbschd**.
3. Run the command **lsid**. This displays the cluster name and the grid control server (LSF master machine) name. If you cannot find the `lsid` command, you may have to source the profile first by opening a command prompt and executing the following command:

```
. <LSF_TOP>/conf/profile.lsf
```

Please note the period `'.'` which is the command to 'source' the file.

Note: The `hostsetup` command automatically produces the sourced `profile.lsf` for each user, but if it does not, you need to source it yourself.

4. Run the command **lshosts**. This displays static information about the grid control server (LSF master machine).
5. Run the command **lsload**. This displays dynamic information about the grid control server (LSF master machine).

6. Run the command **bsub sleep 29**. This submits a job to the grid control server since it is the only machine so far in the cluster.
7. Run the command **bjobs**. This displays the job information. As you repeat this command, you can see the job go from **PEND**, to **RUN**, to being removed from the queue. The following is sample output assuming the grid control server (LSF master machine) is **grid3.testgrid.com**.

```

$ lsid
IBM Spectrum LSF Standard 10.1.0.6, Sep 16 2018
Copyright International Business Machines Corp. 1992, 2016.
US Government Users Restricted Rights - Use, duplication or disclosure restricted by
GSA ADP Schedule Contract with IBM Corp.

My cluster name is sas_cluster
My master name is myhost
Cluster in ISV mode : SAS
$ lshosts
HOST_NAME      type      model  cpuf  ncpus  maxmem  maxswp  server  RESOURCES
myhost         X86_64   Intel_EM 60.0    4 16048M  2055M   Yes (mg)
$ lsload
HOST_NAME      status  rl5s   r1m   r15m   ut     pg   ls     it   tmp   swp   mem
myhost         ok      1.0   1.0   1.0   25%   0.0  1     1   365G 2043M 14G
$ bhosts
HOST_NAME      STATUS      JL/U     MAX   NJOBS   RUN   SSUSP  USUSP  RSV
myhost         ok          -        1     0       0     0     0     0
$

```

8. Set up the Process Manager environment by sourcing the `profile.js` file. This can be done by executing the following command: `. <JS_TOP>/conf/profile.js`. Please note the period `'` which is the command to `'source'` the file.

Note: *Since all Process Manager commands require the environment set up by sourcing the `profile.js` file, it is best practice to source the `profile.js` file in the default profile for the shell.*

9. Run the command **jid**. When prompted for username and password, provide the Primary LSF administrator credentials. This displays static information about the Process Manager Server.

```

$ jid
User name: sas
Password:
My Process Manager Server name is rdcesx05189.race.sas.com.
IBM Spectrum LSF Process Manager 10.2.0.6 Build 497311 (for SAS)
Copyright International Business Machines Corp. 1992, 2018.
US Government Users Restricted Rights - Use, duplication or disclosure restricted by
GSA ADP Schedule Contract with IBM Corp.
ISV mode: SAS.
$

```

10. Run the command **flowmanager**. This executes a client application to verify client communication to the Process Manager Server.

Note: *If you are installing Platform Suite for SAS for single machine scheduling, the task is complete at this stage and you can stop here. If you are installing Platform Suite for SAS for use with SAS Grid Manager for Platform, continue with the next chapter.*

Chapter 3 - Installing and Configuring LSF on Grid Nodes, SAS Foundation Grid Clients or UNIX

When the `install.config` file was filled out, you listed machines that are to be part of the grid. Some of these machines process jobs, some may submit jobs and some may do both. Grid nodes process jobs for the grid and can optionally submit jobs to the grid. SAS Foundation Grid Clients only submit jobs to the grid without processing grid jobs.

1. Verify that the host information is already in the LSF cluster file `LSF_CONFDIR/lsf.cluster.cluster_name`. If it is not, then edit the Host section of the cluster file to add the host. For more information see, “Chapter 1: Managing Your Cluster,” “Adding a host” section, in the *Administering IBM Spectrum LSF* document found in the `docs` directory of your SAS Software Depot containing Platform LSF.
2. Log onto each newly added machine as root.
3. Make sure access to the shared directory where LSF was installed is available. Also, make sure the share is available for the boot initialization process and all grid users can read the share.
4. Add the Primary LSF administrator user if this was not done before the installation process started.
5. Change into the `<LSF_TOP>/<version>/install` share directory (in our example, it is `/usr/share/lsf/<version>/install`).

6. Run the following command to set up the proper initialization files for future reboots:

```
./hostsetup --top="/usr/share/lsf" --boot="y" --profile="y"
--start="y"
```

Note: There are two dashes “--” in the options. See “Chapter 5 – LSF Quick Reference” for more information on the `hostsetup` command.

7. Run the following two commands on the grid control node to make the new node known:

```
lsadmin reconfig
badmin reconfig
```

Note: It is recommended that users wait a few seconds between running `lsadmin reconfig` and `badmin reconfig`. Doing so will ensure that `badmin reconfig` is running properly.

Testing the Installation

Once the system has rebooted, you can follow these steps to make sure LSF on the cluster is operating properly.

1. Log onto the grid control server as an LSF administrator or user.
2. Run the command `lshosts`. This displays static information about the grid control server and all grid node machines.
3. Run the command `lsload`. This displays dynamic information about the grid control server and all grid node machines.

4. Run the command **bsub sleep 1000**. This submits a job to the cluster. Repeat this command once for each node in the cluster.
5. Run the command **bjobs**. This displays the job information. As you repeat this command, you see the job go from **PEND**, to **RUN**, to being removed from the queue.

The following is sample output of a homogeneous cluster where the grid control server (LSF master machine) is **myhost** running Linux and the grid nodes are **node1.sas.com**, **node2**, **node3**, and **node4**, all running Linux.

```

$ . /usr/share/lsf/conf/profile.lsf
$ lshosts
HOST_NAME      type      model  cpuf ncpus  maxmem maxswp server RESOURCES
myhost         X86_64   Intel_EM 60.0   1  3291M 2047M   Yes (mg SASApp)
node1.sas.com X86_64   Intel_EM 60.0   1  250M  511M   Yes (mg SASApp)
node2          X86_64   Intel_EM 60.0   1  250M  511M   Yes (mg SASApp)
node3          X86_64   Intel_EM 60.0   1  250M  511M   Yes (mg SASApp)
node4          X86_64   Intel_EM 60.0   1  250M  511M   Yes (mg SASApp)
$ lsload
HOST_NAME      status  r15s  r1m  r15m  ut    pg  ls    it    tmp    swp    mem
node3          ok     0.1  0.0  0.5  2%   9.3  0    8 9888G 510M 211M
node1.sas.com  ok     0.5  0.0  0.4  2%   8.2  0    7 9736G 510M 210M
node2          ok     0.6  0.7  0.8  17% 232.5 1    0 9888G 510M 168M
node4          ok     0.6  0.7  0.8  17% 230.2 1    0 9888G 510M 166M
myhost         ok     1.0  0.0  0.7  55% 16.4  1    0 8906G 2047M 3108M
$ bhosts
HOST_NAME      STATUS      JL/U    MAX  NJOBS    RUN  SSUSP  USUSP  RSV
myhost         ok          -       1    0        0    0      0      0
node1.sas.com  ok          -       1    0        0    0      0      0
node2          ok          -       1    0        0    0      0      0
node3          ok          -       1    0        0    0      0      0
node4          ok          -       1    0        0    0      0      0
$

```

Adding Nodes or SAS Foundation Clients to the Grid

A grid can have machines added to it any time in the future. If a new machine needs to be added to the grid after an initial install, the procedures are similar to adding grid nodes to a new LSF cluster. To add a node to an existing LSF cluster, do the following:

1. Edit the `lsf.cluster.<cluster_name>` file (`lsf.cluster.sas_cluster` in our case) and add the new machine names in the host section. This section looks like the example below:

```

Begin Host
HOSTNAME          model type      server rlm  mem  swp  RESOURCES
#Keywords
myhost            !     LINUX86    1    -   -   -   (linux)
node1.sas.com     !     LINUX86    1    -   -   -   (linux)
node2             !     LINUX86    1    -   -   -   (linux)
node3             !     LINUX86    1    -   -   -   (linux)
node4             !     LINUX86    1    -   -   -   (linux)
End      Host

```

For example, to add **node5** to the previous cluster, the resulting Host section would look like the example below:


```

Begin Host
HOSTNAME          model type      server rlm  mem  swp  RESOURCES
#Keywords
myhost            !    LINUX86      1    -    -    -    (linux)
node1.sas.com     !    LINUX86      1    -    -    -    (linux)
node2             !    LINUX86      1    -    -    -    (linux)
node3             !    LINUX86      1    -    -    -    (linux)
node4             !    LINUX86      1    -    -    -    (linux)
node5            !    LINUX86    1    -    -    -    (linux)
End              Host

```

2. Follow the steps at the beginning of this chapter.

Converting a Grid Node Machine to a Grid Client

If you are running SAS Foundation to submit jobs to the grid but the machine will not participate as a grid node, and you installed Platform LSF on a machine as an “LSF Server” host type, prevent jobs from running on the machine by making it, in effect, an “LSF Client” machine. Change the state of a machine to ‘closed’ by following these steps:

1. Log on as the LSF Administrator.
2. Run the command **badmin hclose <host_name>**.

When you run the **bhosts** command, the host displays a status of ‘closed’.

Adding a New Machine Type to the Grid

Before adding a new machine type to an existing grid, verify that the host type does not already exist in your cluster by logging onto any host in the cluster and listing the contents of the `LSF_TOP/<version>` directory. If the host type currently exists, a subdirectory with the name of the host type is to display, and it’s recommended that you edit the `LSF_CONFDIR/lsf.cluster.<clustername>` file to add the hostname in the HOST section. Then go to step 5 below. If the host type does not already exist, complete all the steps below.

1. Get the LSF distribution tar file for the host type you want to add.
2. Log on as root to any host that can access the LSF install directory.
3. Change to the LSF install directory.
4. Edit `install.config`:
 - a. For `LSF_TARDIR`, specify the path to the tar file. For example:

```
LSF_TARDIR="/usr/share/lsf_distrib/<version> "
```
 - b. For `LSF_ADD_SERVERS`, list the new host names enclosed in quotes and separated by spaces. For example:

```
LSF_ADD_SERVERS="hosta hostb"
```
 - c. Run `./lsfinstall -f install.config`
This automatically creates the host information in `lsf.cluster.cluster_name`.
5. Run `lsadmin reconfig` to reconfigure LIM.
6. Run `badmin reconfig` to reconfigure mbatchd.

7. Run `hostsetup` to set up the new host and configure the daemons to start automatically at boot. For example, from an install directory such as `/usr/share/lsf/<version>/install`:

```
./hostsetup --top="/usr/share/lsf" --boot="y" --profile="y"
--start="y"
```

Note: There are two dashes "--" in the options. See "Chapter 5 – LSF Quick Reference" for more information on the `hostsetup` command.

8. Start LSF on the new host:

```
lsadmin limstartup
lsadmin resstartup
badmin hstartup
```

Setting up UNIX as a LSF Client Installation for Non-Access to a Shared Directory

Use this configuration setup if your machine does not have access to a shared directory.

Use `slave.config` to install a slave host. Note that `slave.config` is located in the same directory as `install.config` after you untar the installer package.

Note: Seeing the term, "UNAVAILABLE" display during installation is "normal" for a LSF client configuration that is not running LSF daemons.

1. In `slave.config`, you need to specify the following params. Even though some params are not needed for client, you need to provide them for the installer to work.

`LSF_TOP` -- this should be on a local directory but not the same one as noted for the master host.
`LSF_LICENSE` – identifies a path to the license where the entitlement and inventory tag files are stored.

`LSF_ADMINS` -- specify the existing admins of the main cluster.

`LSF_ADD_CLIENTS` -- specify the host you are installing on (that is the slave and client host).

`LSF_SERVER_HOSTS` -- specify the master and master candidate hosts of the main cluster (in the same order as in the main cluster).

`LSF_LIM_PORT` -- specify the LIM port of the main cluster.

This setup allows you to run "`sudo ./lsfinstall -s -f slave.config`" to install it.

2. Add a line to the `lsf .cluster.xxx` file of the main cluster. Be sure to indicate the host is type client. For example,

```
HOSTNAME model type server RESOURCES #Keywords
...
ib16b06 ! ! 0 ()
```

Then run `lsadmin reconfig`. (`badmin reconfig` is probably not needed, but was run in this test).

3. On the client host, you can try `lsid`, and `bsub` to submit a job. On `bsub`, you need to specify `-R "type==any"` as LSF won't detect the host type of a client machine.

The client host does not refer to LSF_TOP of the main cluster. The example below shows how lsf.conf looks on the client machine after these steps (from LSF10.1):

```
LSF_GET_CONF=lim
LSF_CONFDIR=/usr/local/lsf/conf
LSF_LIM_PORT=3789
LSF_SERVER_HOSTS="myMasterHost"
LSF_VERSION=10.1.0.9
#LSF_LOCAL_RESOURCES="[hostname hosta][model model1][type type1][server 1][resource
resource1][resourcemap n*resource1]"
LSF_TOP=/usr/local/lsf

# Daemon log messages
LSF_LOGDIR=/usr/local/lsf/log
LSF_LOG_MASK=LOG_WARNING
LSF_ENABLE_EGO=N
# LSF_EGO_ENVDIR=/usr/local/lsf/conf
LSB_ENABLE_HPC_ALLOCATION=Y
LSF_EGO_DAEMON_CONTROL=N
```

4. When running the boot (hostsetup) command for LSF with LSF 10.1, you may receive a message about a missing "LSF Entitlement" in the dialog.

There are two solutions to correct this issue.

1. Ignore the problem and let it display an error. Therefore, you do not need an LSF entitlement.
2. Workaround solution: Is there a bug in the hostsetup command? If so, set the following two environment variables before running the hostsetup script.

```
IS_SAS_BUILD=Y
LSF_LICENSE=<path to the license.dat>
```

Example:

```
a. [root@xxxx install]# export IS_SAS_BUILD=Y
b. [root@xxxx install]# export LSF_LICENSE=/opt/sasinside/LSF_Share
  /license.dat

c. [root@xxxx install]# ./hostsetup -- top="/opt/sasinside/LSF_Share
  /lsf" --boot="y" --profile="y" --start="y"
```

Logging installation sequence in /opt/sasinside/LSF_Share/lsf/log/Install.log

Startup and Boot Setup for LSF and PM

LSF Boot Setup with Startup

Change into the LSF_TOP/10*/install subdirectory. For example:

```
[root@localhost] # cd /common/share/lsf/10/install
```

Run the following command initialization files for future reboots after sourcing the LSF profile. This will add the LSF daemons to the server startup and startup the required LSF daemons. Note the two dashes before each parameter.

```
[root@localhost] # ./hostsetup --top="/common/share/lsf" --boot="y"
--start="y"
```

PM (jfd) Boot Setup

Set up the Process Manager environment by sourcing the profile.js file if it was not already run. Then, run the PM/jfd "bootsetup" script.

```
[root@localhost] # . <JS_TOP>/conf/profile.js
[root@localhost] # . <JS_TOP>/10*/install/bootsetup
```

Example:

```
[root@localhost] # . /common/share/pm/conf/profile.js
[root@localhost] # /common/share/pm/10*/install/bootsetup
```

Reminder: (**bootsetup** with no arguments) will install PM/jfd startup at boot time.

Chapter 4 – Installing the Process Manager Client

The Process Manager Client, consists of the following can be installed on any machine or machines:

- The Calendar Editor
- The Flow Manager
- The Command Line Interface (CLI)

The installation of the client is driven from the **pm10.2.0.9_clt_sas_lnx26-x64.tar.Z** file. If you are not sure which SAS Clients you should use when installing the Process Manager Client, contact your SAS technical representative for assistance.

Install the Process Manager Client

When you install Process Manager Client, you install Flow Manager and Calendar Editor on the host. You use Flow Manager to trigger, monitor and control running flows, and to obtain history information about completed flows. You use Calendar Editor to define calendars which Process Manager uses to calculate the dates on which a job or flow should run. Calendars contain either specific dates or expressions that resolve to a series of dates.

About this Task - Procedure

1. Log on to the host on which you want to install. You can use any user account to install the Process Manager Client.
2. Get the distribution tar files and copy them to the same directory.
You need an installation script tar file, and a client tar file for the host type on which you want to install. For example, for Linux, you need the following files:
 - pm10.2.0.9_clt_sas_lnx26-x64.tar.Z
 - pm10.2.0.9_sas_pinstall.tar.Z

3. Extract the installation script tar file.

```
zcat pm10.2.0.9_sas_pinstall.tar.Z|tar xvf-
```

This creates a directory called pm10.2.0.9_sas_pinstall, containing the following:

- install.config—configuration file where you define your installation prior to installing
 - jsinstall—installation script for installing the Process Manager Client
4. Edit install.config and complete Section 1 to specify parameters for your client installation.

5. Run the installation script.
`./jsinstall -f install.config`

After Installing the Client

Set the Client Environment

Procedure

1. Set the Process Manager environment on each client:

- On csh or tcsh:
`source JS_TOP/conf/cshrc.js`
- On sh, ksh or bash:
`. JS_TOP/conf/profile.js`
© Copyright IBM Corp. 1992, 2020, 17

Where JS_TOP is the top-level Process Manager installation directory, the value specified in the install.config file.

2. After the Process Manager Server has started, run the client applications to verify the success of the installation:
 - a. Run the floweditor
 - b. Run flowmanager
 - c. Run caleditor

Both the Calendar Editor and the Flow Manager require a connection to the Server to be able to start. If you are unable to start either application, there is an error in the configuration, or the Server is not started.

Note: *Flow Editor may not be installed if you purchased the Platform Suite for SAS. For more information or to purchase Flow Editor, contact your SAS sales representative.*

Chapter 5 - LSF Quick Reference

Command	Description										
lsid	Displays version number, cluster name, and the grid control server (LSF master host) name. Useful to see if the grid daemons are running and if running in SAS mode.										
lshosts	Displays information about the hosts recognized by LSF along with their static resource information.										
lsload	Displays the dynamic resource information for the hosts in the grid (cluster).										
bhosts	Displays batch information about all hosts in the grid (cluster).										
bjobs	Displays information about current user's LSF jobs										
lsfstartup	Starts the LIM, RES, sbatchd, and mbatchd daemons on all hosts in the cluster. Must be run as root and all hosts must be running rsh or ssh daemons.										
lsfrestart	Restarts the LIM, RES, sbatchd, and mbatchd daemons on all hosts in the cluster. Must be run as root and all hosts must be running rsh or ssh daemons.										
lsfshutdown	Shuts down the LIM, RES, sbatchd, and mbatchd daemons on all hosts in the cluster. Must be run as root and all hosts must be running rsh or ssh daemons.										
lsadmin	Administrative tool for LSF available to LSF administrators. Useful subcommands include the following: <table border="1" data-bbox="526 968 1365 1234"> <tbody> <tr> <td>reconfig</td> <td>Restarts all LIMs in the cluster to read any changes in the configuration files.</td> </tr> <tr> <td>limstartup</td> <td>Starts LIM on the local host</td> </tr> <tr> <td>limrestart</td> <td>Restarts LIM on the local host</td> </tr> <tr> <td>resstartup</td> <td>Starts RES on local host</td> </tr> <tr> <td>resrestart</td> <td>Restarts RES on local host</td> </tr> </tbody> </table>	reconfig	Restarts all LIMs in the cluster to read any changes in the configuration files.	limstartup	Starts LIM on the local host	limrestart	Restarts LIM on the local host	resstartup	Starts RES on local host	resrestart	Restarts RES on local host
reconfig	Restarts all LIMs in the cluster to read any changes in the configuration files.										
limstartup	Starts LIM on the local host										
limrestart	Restarts LIM on the local host										
resstartup	Starts RES on local host										
resrestart	Restarts RES on local host										
bhist	Displays historical information about jobs. Useful parameters including the following: <table border="1" data-bbox="526 1318 1365 1533"> <tbody> <tr> <td>-p -r -d -a</td> <td>Displays information about specific jobs (pending, running, done, or all).</td> </tr> <tr> <td>-l</td> <td>Display in long format.</td> </tr> <tr> <td>-u <user> all</td> <td>Displays job for specified or all users.</td> </tr> <tr> <td><job ID></td> <td>Displays only specified job information.</td> </tr> </tbody> </table>	-p -r -d -a	Displays information about specific jobs (p ending, r unning, d one, or a ll).	-l	Display in long format.	-u <user> all	Displays job for specified or all users.	<job ID>	Displays only specified job information.		
-p -r -d -a	Displays information about specific jobs (p ending, r unning, d one, or a ll).										
-l	Display in long format.										
-u <user> all	Displays job for specified or all users.										
<job ID>	Displays only specified job information.										

badmin	Administrative tool for LSF's batch processing facility available to LSF administrators. Useful subcommands include the following:	
	reconfig	Reconfigures the batch facility without restarting sbatchd or mbatchd to read any changes in the configuration files.
	hstartup	Starts sbatchd on the local host
	hrestart	Restarts sbatchd on the local host
	mbdrestart	Restarts mbatchd. Needs to be done when new hosts are added to the grid (cluster).
	hclose <host>	Closes a host preventing it from running jobs.
	hopen <host>	Opens a host to allow it to run jobs.
bsub	Submit a job to the grid. Useful parameters include the following:	
	-I	Interactive. Remote output displayed locally.
	-m	Submit to a specific host.
	-R "res_req"	Submit with specified resource.
hostsetup	Sets up a host to use the LSF cluster and configures LSF daemons to start automatically.	
	--top	Top-level installation directory that contains the cluster the local host belongs to. <path> must be accessible to local host where hostsetup is running
	--boot	Configure system scripts to automatically start and stop LSF at system startup and shutdown. The local host where hostsetup is running must be an LSF server in the cluster.
	--profile	Add cshrc.lsf and profile.lsf to system-wide environment and startup programs.
	--start	Start LSF on the local host after hostsetup. The local host where hostsetup is running must be an LSF server in the cluster.
	--quiet	Do not display detailed messages.

The LSF commands shown in this section include examples of typical output. The output you see differs according to your local configuration.

The commands are described briefly so that you can easily use them as a "confirmation check" for your LSF installation. See the *LSF Reference* for complete usage and command options. You can use these commands on any LSF host. If you get proper output from these commands, your cluster is ready to use. If your output from the commands discussed in this section has errors, see the *LSF Reference* for help.

Check Cluster Configuration (*lsadmin*)

```
lsadmin ckconfig -v
```

The **lsadmin** command controls the operation of an LSF cluster and LSF configuration files. The -v flag displays detailed information about the LSF configuration:

```
$ lsadmin ckconfig -v
```


Checking configuration files ...

EGO 3.4.0 build 497310, Sep 16 2018
Copyright International Business Machines Corp. 1992, 2016.
US Government Users Restricted Rights - Use, duplication or disclosure
restricted by GSA ADP Schedule Contract with IBM Corp.

binary type: linux2.6-glibc2.3-x86_64
Reading configuration from
/usr/share/lsf/conf/ego/lax94t01_pss91/kernel/ego.conf
Nov 8 09:24:28 2018 32382 5 3.4.0 EGO 3.4.0 build 497310, Sep 16 2018
Copyright International Business Machines Corp. 1992, 2016.
US Government Users Restricted Rights - Use, duplication or disclosure
restricted by GSA ADP Schedule Contract with IBM Corp.

binary type: linux2.6-glibc2.3-x86_64
Nov 8 09:24:28 2018 32382 6 3.4.0 Lim starting...
Nov 8 09:24:28 2018 32382 6 3.4.0 LIM is running in advanced workload
execution mode.
Nov 8 09:24:28 2018 32382 6 3.4.0 Master LIM is not running in
EGO_DISABLE_UNRESOLVABLE_HOST mode.
Nov 8 09:24:28 2018 32382 5 3.4.0 /usr/share/10.1/linux2.6-glibc2.3-
x86_64/etc/lim -C
Nov 8 09:24:28 2018 32382 6 3.4.0 initEntitlement: EGO_AUDIT_MAX_SIZE
was not set. Default value <100> will be used.
Nov 8 09:24:28 2018 32382 6 3.4.0 initEntitlement:
EGO_AUDIT_MAX_ROTATE was not set. Default value <20> will be used.
Nov 8 09:24:28 2018 32382 6 3.4.0 LIM is running as IBM Spectrum LSF
Standard Edition.
Nov 8 09:24:28 2018 32382 6 3.4.0 LIM is running as IBM Spectrum
Conductor Edition.
Nov 8 09:24:28 2018 32382 6 3.4.0 LIM is running as EGO Edition.
Nov 8 09:24:28 2018 32382 6 3.4.0 reCheckClass: numhosts 1 so reset
exchIntvl to 15.00
Nov 8 09:24:28 2018 32382 6 3.4.0 Checking Done.

No errors found.

The messages shown are typical of normal output from **lsadmin ckconfig -v**. Other messages may indicate problems with your LSF configuration. See the *LSF Reference* for help with some common configuration errors.

Find Out Cluster Status (*lsid* and *lsload*)

lsid

Informs you if your LSF environment is set up properly. Cluster status *lsid* displays the current LSF version number, cluster name, and host name of the current grid control server (LSF master host) for your cluster. The grid control server (LSF master) name displayed by *lsid* may vary, but it is usually the first host configured in the Hosts section of `LSF_CONFDIR/lsf.cluster.cluster_name`.

```
lsid
```

```
IBM Spectrum LSF Standard 10.1.0.6, Sep 16 2018
Copyright International Business Machines Corp. 1992, 2016.
US Government Users Restricted Rights - Use, duplication or
disclosure restricted by GSA ADP Schedule Contract with IBM Corp.
```

```
My cluster name is sas_cluster
My master name is myhost
Cluster in ISV mode: SAS
```

If you see the message

```
Cannot open lsf.conf file
```

the `LSF_ENVDIR` environment variable is probably not set correctly. Use `cschrc.lsf` or `profile.lsf` to set up your environment.

lsload

Displays the current load levels of the cluster. The output contains one line for each host in the cluster. The status is correct for all hosts in your cluster. For example:

```
lsload
```

HOST_NAME	status	r15s	r1m	r15m	ut	pg	ls	it	tmp	swp	mem
hosta	ok	0.0	0.0	0.0	6%	0.2	2	1365	97M	65M	29M
hostb	ok	0.0	0.0	0.0	9%	0.0	4	1	130M	319M	12M
hostc	ok	2.5	2.2	1.9	64%	56.7	50	0	929M	931M	4000M
hostd	ok	0.2	0.2	0.2	1%	0.0	0	367	93M	86M	50M
hoste	busy	*6.0	2.2	1.9	64%	56.7	50	0	929M	931M	4000M
hostf	unavail										

A `busy` status is shown for hosts with any load index beyond its configured thresholds. An asterisk (*) marks load indices that are beyond their thresholds, causing the host status to be `busy`. A minus sign (-) in front of the value `ok` means that RES is not running on that host.

If you see the message

```
LIM is down
```

or

```
LIM is not responding
```

after starting or reconfiguring LSF, wait a few seconds and try `lsload` again to give the LIMs time to initialize. Notice that `lsload` also shows if LSF is licensed for the host. If you see the message

```
Host does not have a software license
```

you must install a valid LSF license or make sure that the license server is running properly.

There are also a couple of other useful commands:

- The `lshosts` command displays configuration information for LSF hosts and their static resource information.
- The `lsinfo` command displays cluster configuration information about resources, host types, and host models.

Check LSF Batch Configuration (*badadmin*)

badadmin ckconfig -v

The `badadmin` command controls and monitors the operation of the LSF Batch system. Use the `badadmin ckconfig` command to check the LSF Batch configuration files. The `-v` flag displays detailed information about the configuration:

```
badadmin ckconfig -v
Checking configuration files ...
```

```
-----
No errors found.
```

The messages shown above are the normal output from `badadmin ckconfig -v`. Other messages may indicate problems with the Platform LSF Batch configuration. See the *LSF Reference* for help with some common configuration errors.

Find Out LSF Batch System Status (*bhosts* and *bqueues*)

bhosts

The `bhosts` command tells you if LSF Batch is running properly. Notice that `Bhosts` displays the status and other details about the grid nodes (LSF Batch server hosts) in the cluster:

- maximum number of job slots allowed by a single user
- total number of jobs in the system, jobs running, jobs suspended by users, and jobs suspended by the system
- total number of reserved job slots

The status is designed to be `ok` for all grid nodes (hosts) in your cluster. For example:

```
bhosts
```

```
HOST_NAME STATUS JL/U MAX NJOBS RUN SSUSP USUSP RSV
hosta ok      - -  0  0    0  0  0
hostb ok      - -  0  0    0  0  0
hostc ok      - -  0  0    0  0  0
hostd ok      - -  0  0    0  0  0
```

If you see the message

```
lsbatch daemons not responding
```

after starting or reconfiguring LSF, wait a few seconds and try `bhosts` again to give the SBDs time to initialize.

bqueues

LSF Batch queues organize jobs with different priorities and different scheduling policies. The `bqueues` command displays available queues and their configuration parameters. For a queue to accept and dispatch jobs, the status is to be `Open:Active`.

bqueues

QUEUE_NAME	PRIO	STATUS	MAX	JL/U	JL/P	JL/H	NJOBS	PEND	RUN	SUSP
owners	43	Open:Active	-	-	-	-	0	0	0	0
priority	43	Open:Active	-	-	-	-	0	0	0	0
night	40	Open:Inact	-	-	-	-	0	0	0	0
chkpnt_rerun_qu	40	Open:Active	-	-	-	-	0	0	0	0
short	35	Open:Active	-	-	-	-	0	0	0	0
license	33	Open:Active	-	-	-	-	0	0	0	0
normal	30	Open:Active	-	-	-	-	0	0	0	0
hpc_linux	30	Open:Active	-	-	-	-	0	0	0	0
hpc_linux_tv	30	Open:Active	-	-	-	-	0	0	0	0
unicodecmd	30	Open:Active	-	-	-	-	0	0	0	0
idle	20	Open:Active	-	-	-	-	0	0	0	0

The queue information displayed by `bqueues` is configured in `lsb.queues`. Eight queues are defined by default in `lsb.queues`. Modify this file to add, delete, or change queues.

bqueues -l

To see more detailed queue information, use `bqueues -l`:

```
bqueues -l normal
```

```
QUEUE: normal
```

```
-- For normal low priority jobs, running only if hosts are lightly loaded.
This is the default queue.
```

PARAMETERS/STATISTICS

PRIO	NICE	STATUS	MAX	JL/U	JL/P	JL/H	NJOBS	PEND	RUN	SSUSP	USUSP	RSV
30	20	Open:Active	-	-	-	-	0	0	0	0	0	0

SCHEDULING PARAMETERS

	r15s	r1m	r15m	ut	pg	io	ls	it	tmp	swp	mem
loadSched	-	-	-	-	-	-	-	-	-	-	-
loadStop	-	-	-	-	-	-	-	-	-	-	-

```
USERS: all
```

```
HOSTS: all
```

`bqueues -l` shows the following kinds of information about the queue:

- What kinds of jobs are meant to run on the queue?
- Resource usage limits.
- Nodes (hosts) and users that are able to use the queue.
- Scheduling threshold values:
 - `loadSched` is the threshold for LSF to dispatch a job automatically.
 - `loadStop` is the threshold for LSF to suspend a job automatically.

There are a couple of other useful commands:

- The `bparams` command displays information about the LSF Batch configuration parameters.
- The `bhist` command displays historical information about jobs.

Verifying the Network Setup

Overview

The first step in troubleshooting problems with a SAS grid is to verify that all computers in the grid can communicate with one another through the ports that are used by the grid middleware.

Host Addresses

Check the `/etc/hosts` file on each grid node to ensure that the machine name is not mapped to the 127.0.0.1 address. This mapping causes the sign-on connection to the grid node to fail or to hang. This happens because the SAS session being invoked on the grid node cannot determine the correct IP address of the machine on which it is running. A correct IP address must be returned to the client session in order to complete the connection. For example, delete the name "myserver" if the following line is present in the `/etc/hosts` file:

```
127.0.0.1 myserver localhost.localdomain localhost
```

Host Connectivity

You must verify that the network has been set up properly and that each machine knows the network address of all the other machines in the grid. Follow these steps to test the network setup:

1. Run the `hostname` command on every machine in the grid (including grid nodes, grid control servers, and SAS Foundation grid clients).
2. Run the `ping` command on all grid node machines and the grid control machine against every other machine in the grid (including grid client machines). When you ping a grid client machine, use the host name without the domain suffix.
3. Run the `ping` command on each grid client machine against every other machine in the grid (including itself). When a grid client machine pings itself using the value from the `hostname` command, verify that the returned IP address is the same IP address that is returned when the grid nodes ping the client. However, this might not occur on machines with multiple network adapters.

If the network tests indicate a problem, you must either correct the DNS server or add entries to each machine's `hosts` file. Contact your network administrator for the best way to fix the problem.

Platform LSF assumes that each host in the grid has a single name, that it can resolve the IP address from the name, and that it can resolve the official name from the IP address. If any of these conditions are not met, LSF needs its own `hosts` file, which is located in its configuration directory (`LSF_ENVDIR/conf/hosts`).

Host Ports

You must verify that the ports that SAS and LSF use for communication are accessible from other machines. The ports might not be accessible if a firewall is running on one or more machines. If firewalls are running, you must open ports to verify that communication works between the LSF daemons and the instances of SAS.

To determine whether a port is open on a specific host, issue the following command:

```
nmap -p- remote_host | grep port
```

Where:

- *remote_host* is the IP address of the remote host.
- *port* is the port to check on the remote host.

The default ports used in a grid are:

- LSF: 6878, 6881, 6882, 7869, 7870, 7871, and 7872
- Grid Monitoring Service: 1976
- Platform Process Manager: 1966

If you need to change any port numbers, modify these files:

- LSF ports: LSF_ENVDIR/conf/lsf.conf and EGO_CONFDIR/ego.conf
- Platform Process Manager port: pm/conf/js.conf

If you change the Grid Monitoring Service port, you must also change the metadata for the Grid Monitoring Server. If you change the Platform Process Manager port you must also change the metadata for the Job Scheduler Server.

Ports might be used by other programs. To check for ports that are in use, stop the LSF daemons and issue the command `netstat -an |<search-tool><port>`, where *search-tool* is `grep` (UNIX) or `findstr` (Windows). Check the output of the command for the LSF ports. If a port is in use, reassign the port or stop the program that is using the port.

SAS assigns random ports for connections, but you can restrict the range of ports SAS uses by using the `-tcpportfirst <first-port>` and the `-tcpportlast <last-port>` options. You can specify these options in the SAS configuration file or on the SAS command line. For remote sessions, you must specify these options either in the grid command script (`sasgrid.cmd` on Windows or `sasgrid` on UNIX) or in the **Command** field in the logical grid server definition in metadata. For example, adding the following parameters to the SAS command line in the grid script restricts the ports that the remote session uses to between 5000 and 5005:

```
-tcpportfirst 5000 -tcpportlast 5005
```

For More Information

See the *LSF Administrator's Guide* for more information about seeing the status of your cluster.

See the *LSF Reference* for detailed information about the commands described in this section.

See *Administering Process Manager* for detailed information about Process Manager configuration and maintenance.

These documents are also available at:

<http://support.sas.com/rnd/scalability/platform/index.html>.

Appendix – LDAP/PAM Authentication

Configure LDAP/PAM Authentication for Process Manager Server

On UNIX systems, Process Manager supports LDAP/PAM authentication through PAM (pluggable authentication modules). PAM is a third-party tool that can be configured to use the `pam_ldap` module from the `libpam-ldap` package to log into the LDAP/PAM server for password checking.

To enable LDAP/PAM authentication for Process Manager, perform the following steps:

1. Set `JS_LOGIN_REQUIRED=true` in `js.conf`.
2. Modify the PAM configuration on your system to add a service name `eauth_userpass` for the module type authorization.

For example, on Linux, create a new file `eauth_userpass` under the `/etc/pam.d` directory, and then add the following entry to the file:

```
auth required /lib/security/$ISA/pam_ldap.so
```

On Solaris, modify `/etc/pam.conf` to add the following entries:

```
eauth_userpass auth requisite /usr/lib/security/64/pam_authtok_get.so.1
eauth_userpass auth required /usr/lib/security/64/pam_dhkeys.so.1
eauth_userpass auth required /usr/lib/security/64/pam_unix_cred.so.1
eauth_userpass auth binding /usr/lib/security/64/pam_passwd_auth.so.1
server_policy
eauth_userpass auth required /usr/lib/security/64/pam_ldap.so.1
```

On AIX, modify `/etc/pam.conf` to add the following entry:

```
eauth_userpass auth required /usr/lib/security/64/pam_aix
```

Note that the absolute path for the `pam_ldap` module may be different on your system. Ensure that you specify the 64-bit `pam_ldap` module on 64-bit operating systems.

3. Restart Process Manager server `jfd`.



SAS is the leader in [business analytics](#) software and services, and the largest independent vendor in the business intelligence market. Through innovative solutions, SAS helps customers at more than 70,000 sites improve performance and deliver value by making better decisions faster. Since 1976 SAS has been giving customers around the world THE POWER TO KNOW®.