



THE
POWER
TO KNOW.

SAS/ETS[®] 13.2 User's Guide The X12 Procedure

This document is an individual chapter from *SAS/ETS® 13.2 User's Guide*.

The correct bibliographic citation for the complete manual is as follows: SAS Institute Inc. 2014. *SAS/ETS® 13.2 User's Guide*. Cary, NC: SAS Institute Inc.

Copyright © 2014, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a Web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513.

August 2014

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit support.sas.com/bookstore or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.



Gain Greater Insight into Your SAS[®] Software with SAS Books.

Discover all that you need on your journey to knowledge and empowerment.



Chapter 37

The X12 Procedure

Contents

Overview: X12 Procedure	2670
Getting Started: X12 Procedure	2671
Basic Seasonal Adjustment	2672
Syntax: X12 Procedure	2675
Functional Summary	2676
PROC X12 Statement	2679
ADJUST Statement	2686
ARIMA Statement	2687
AUTOMDL Statement	2687
BY Statement	2690
CHECK Statement	2691
ESTIMATE Statement	2692
EVENT Statement	2693
FORECAST Statement	2695
ID Statement	2696
IDENTIFY Statement	2696
INPUT Statement	2698
OUTLIER Statement	2699
OUTPUT Statement	2702
PICKMDL Statement	2703
REGRESSION Statement	2704
SEATSDECOMP Statement	2711
TABLES Statement	2713
TRANSFORM Statement	2713
USERDEFINED Statement	2715
VAR Statement	2715
X11 Statement	2715
Details: X12 Procedure	2720
Data Requirements	2720
Missing Values	2720
SAS Predefined Events	2721
User-Defined Regression Variables	2725
Combined Test for the Presence of Identifiable Seasonality	2726
Computations	2728
PICKMDL Model Selection	2728
SEATS Decomposition	2729

Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords	2729
Using Auxiliary Variables to Subset Output Data Sets	2732
ODS Graphics	2733
OUT= Data Set	2735
SEATSDECOMP OUT= Data Set	2736
Special Data Sets	2737
Examples: X12 Procedure	2742
Example 37.1: ARIMA Model Identification	2742
Example 37.2: Model Estimation	2746
Example 37.3: Seasonal Adjustment	2748
Example 37.4: RegARIMA Automatic Model Selection	2751
Example 37.5: Automatic Outlier Detection	2757
Example 37.6: User-Defined Regressors	2764
Example 37.7: MDLINFOIN= and MDLINFOOUT= Data Sets	2770
Example 37.8: Setting Regression Parameters	2774
Example 37.9: Creating an MDLINFO= Data Set for Use with the PICKMDL Statement	2781
Example 37.10: Illustration of ODS Graphics	2787
Example 37.11: AUXDATA= Data Set	2788
References	2791

Overview: X12 Procedure

The X12 procedure is an adaptation of the U.S. Bureau of the Census X-12-ARIMA Seasonal Adjustment program (U.S. Bureau of the Census 2010). The X-12-ARIMA program was developed by the Time Series Staff of the Statistical Research Division, U.S. Census Bureau. The X-12-ARIMA seasonal adjustment program contains components developed from Statistics Canada's X-11-ARIMA program. The X-12-ARIMA automatic modeling method is based on the work of Gómez and Maravall (1997a, b).

The Time Series Staff of the Statistical Research Division, U.S. Census Bureau, has recently developed a new program, X-13ARIMA-SEATS (U.S. Bureau of the Census 2013). This program incorporates the X-12-ARIMA functionality along with the SEATS functionality that was developed by Gómez and Maravall (1997a, b). The X12 procedure includes improvements on X-12-ARIMA methods that are incorporated into the X-13ARIMA-SEATS program.

The version of PROC X12 documented here was produced by converting the U.S. Census Bureau's FORTRAN code to the SAS development language and adding typical SAS procedure syntax. This conversion work was performed by SAS and resulted in the X12 procedure. Although several features were added during the conversion, credit for the statistical aspects and general methodology of the X12 procedure belongs to the U.S. Census Bureau.

The X12 procedure seasonally adjusts monthly or quarterly time series. The procedure makes additive or multiplicative adjustments and creates an output data set that contains the adjusted time series and intermediate calculations.

The X-12-ARIMA program combines the capabilities of the X-11 program (Shiskin, Young, and Musgrave 1967) and the X-11-ARIMA/88 program (Dagum 1988) and also introduces some new features (Findley et al. 1998). One of the main enhancements involves the use of a regARIMA model, a regression model with ARIMA (autoregressive integrated moving average) errors. Thus, the X-12-ARIMA program contains methods developed by both the U.S. Census Bureau and Statistics Canada. In addition, the X-12-ARIMA automatic modeling routine is based on the TRAMO (time series regression with ARIMA noise, missing values, and outliers) method (Gómez and Maravall 1997a, b). The four major components of the X-12-ARIMA program are regARIMA modeling, model diagnostics, seasonal adjustment that uses enhanced X-11 methodology, and post-adjustment diagnostics. Statistics Canada's X-11 method fits an ARIMA model to the original series, and then uses the model forecasts to extend the original series. This extended series is then seasonally adjusted by the standard X-11 seasonal adjustment method. The extension of the series improves the estimation of the seasonal factors and reduces revisions to the seasonally adjusted series as new data become available.

Seasonal adjustment of a series is based on the assumption that seasonal fluctuations can be measured in the original series, O_t , $t = 1, \dots, n$, and separated from trend cycle, trading day, and irregular fluctuations. The seasonal component of this time series, S_t , is defined as the intrayear variation that is repeated consistently or in an evolving fashion from year to year. The trend cycle component, C_t , includes variation due to the long-term trend, the business cycle, and other long-term cyclical factors. The trading day component, D_t , is the variation that can be attributed to the composition of the calendar. The irregular component, I_t , is the residual variation. Many economic time series are related in a multiplicative fashion ($O_t = S_t C_t D_t I_t$). Other economic series are related in an additive fashion ($O_t = S_t + C_t + D_t + I_t$). A seasonally adjusted time series, $C_t I_t$ or $C_t + I_t$, consists of only the trend cycle and irregular components. For more details about seasonal adjustment with the X-11 method, see Ladiray and Quenneville (2001).

Graphics are now available with the X12 procedure. For more information, see the section “ODS Graphics” on page 2733.

Getting Started: X12 Procedure

The most common use of the X12 procedure is to produce a seasonally adjusted series. Eliminating the seasonal component from an economic series facilitates comparison among consecutive months or quarters. A plot of the seasonally adjusted series is often more informative about trends or location in a business cycle than a plot of the unadjusted series.

The following example shows how to use PROC X12 to produce a seasonally adjusted series, $C_t I_t$, from an original series $O_t = S_t C_t D_t I_t$.

In the multiplicative model, the trend cycle component C_t keeps the same scale as the original series O_t , while S_t , D_t , and I_t vary around 1.0. In all displayed tables, these latter components are expressed as percentages and thus vary around 100.0 (in the additive case, they vary around 0.0). However, in the output data set, the data displayed as percentages in the displayed output are expressed as the decimal equivalent and thus vary around 1.0 in the multiplicative case.

The naming convention used in PROC X12 for the tables follows the convention used in the Census Bureau's X-12-ARIMA program; see *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c), *X-12-ARIMA Quick Reference for Windows (PC)* (U.S. Bureau of the Census 2009b), and *X-12-ARIMA Quick Reference for UNIX/Linux* (U.S. Bureau of the Census 2009a). Also see the section “[Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords](#)” on page 2729. The table names are outlined in [Table 37.14](#).

The tables that correspond to parts A through C are intermediate calculations. The final estimates of the individual components are found in the D tables: Table D10 contains the final seasonal factors, Table D12 contains the final trend cycle, and Table D13 contains the final irregular series. If you are primarily interested in seasonally adjusting a series without consideration of intermediate calculations or diagnostics, you need to look only at Table D11, the final seasonally adjusted series. Tables in part E contain information about extreme values and changes in the original and seasonally adjusted series. The tables in part F are seasonal adjustment quality measures. Spectral analysis is performed in part G. For further information about the tables produced by the X11 statement, see Ladiray and Quenneville (2001).

Basic Seasonal Adjustment

Suppose that you have monthly retail sales data starting in September 1978 in a SAS data set named SALES. At this point, you do not suspect that any calendar effects are present, and there are no prior adjustments that need to be made to the data.

In this simplest case, you need only specify the DATE= variable in the PROC X12 statement and request seasonal adjustment in the X11 statement as shown in the following statements:

```
data sales;
    set sashelp.air;
    sales = air;
    date = intnx( 'month', '01sep78'd, _n_-1 );
    format date monyy.;
run;

proc x12 data=sales date=date;
    var sales;
    x11;
    ods select d11;
run;
```

The results of the seasonal adjustment are in Table D11 (the final seasonally adjusted series) in the displayed output shown in [Figure 37.1](#).

Figure 37.1 Basic Seasonal Adjustment**The X12 Procedure****Table D 11: Final Seasonally Adjusted Data
For Variable sales**

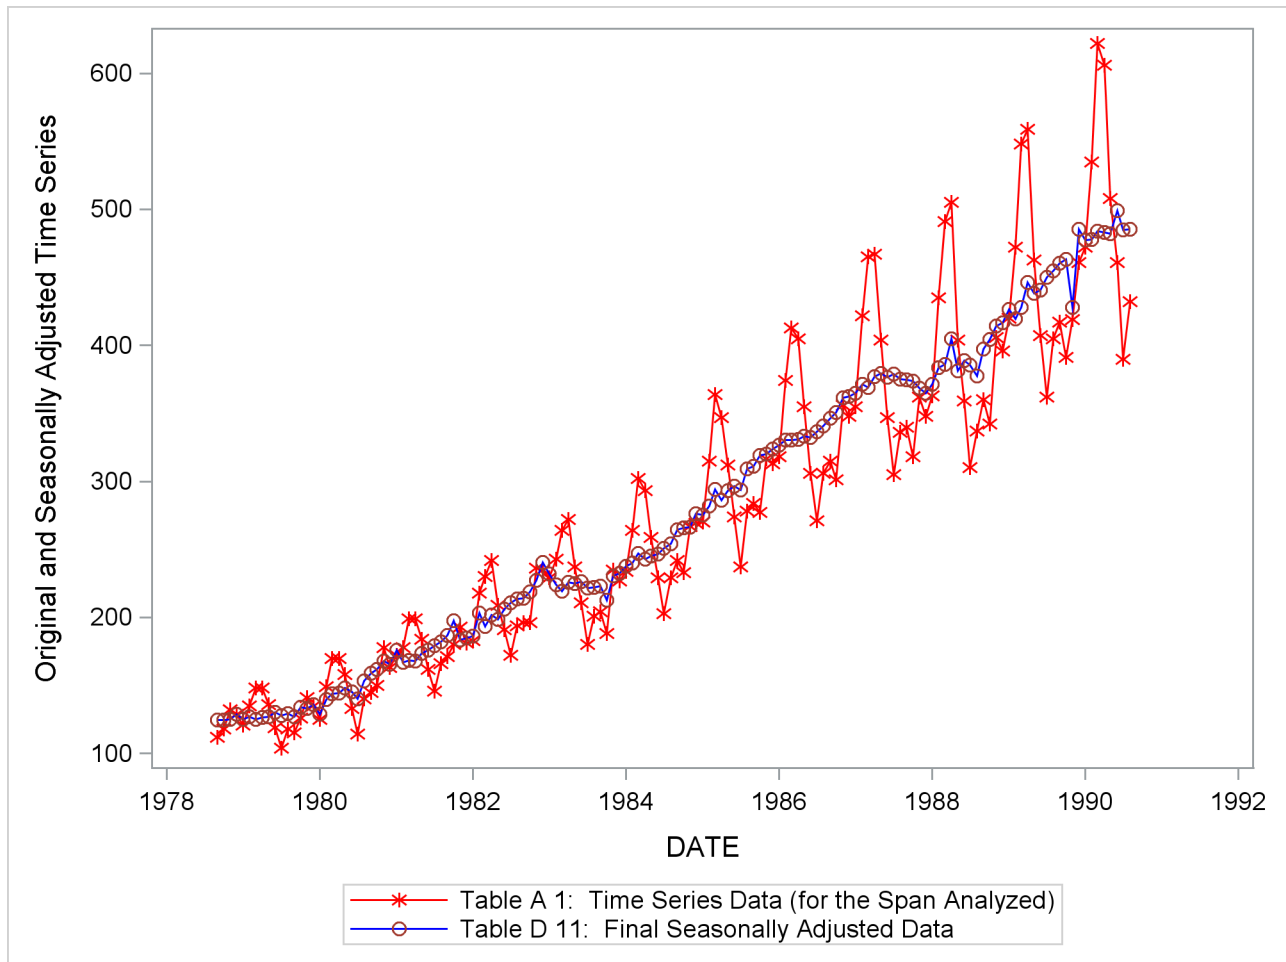
Year	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	Total
1978	124.560	124.649	124.920	129.002	503.131
1979	125.087	126.759	125.252	126.415	127.012	130.041	128.056	129.165	127.182	133.847	133.199	135.847	1547.86
1980	128.767	139.839	143.883	144.576	148.048	145.170	140.021	153.322	159.128	161.614	167.996	165.388	1797.75
1981	175.984	166.805	168.380	167.913	173.429	175.711	179.012	182.017	186.737	197.367	183.443	184.907	2141.71
1982	186.080	203.099	193.386	201.988	198.322	205.983	210.898	213.516	213.897	218.902	227.172	240.453	2513.69
1983	231.839	224.165	219.411	225.907	225.015	226.535	221.680	222.177	222.959	212.531	230.552	232.565	2695.33
1984	237.477	239.870	246.835	242.642	244.982	246.732	251.023	254.210	264.670	266.120	266.217	276.251	3037.03
1985	275.485	281.826	294.144	286.114	293.192	296.601	293.861	309.102	311.275	319.239	319.936	323.663	3604.44
1986	326.693	330.341	330.383	330.792	333.037	332.134	336.444	341.017	346.256	350.609	361.283	362.519	4081.51
1987	364.951	371.274	369.238	377.242	379.413	376.451	378.930	375.392	374.940	373.612	368.753	364.885	4475.08
1988	371.618	383.842	385.849	404.810	381.270	388.689	385.661	377.706	397.438	404.247	414.084	416.486	4711.70
1989	426.716	419.491	427.869	446.161	438.317	440.639	450.193	454.638	460.644	463.209	427.728	485.386	5340.99
1990	477.259	477.753	483.841	483.056	481.902	499.200	484.893	485.245	3873.15
Avg	277.330	280.422	282.373	286.468	285.328	288.657	288.389	291.459	265.807	268.829	268.774	276.446	

Total: 40323 Mean: 280.02 S.D.: 111.31**Min: 124.56 Max: 499.2**

You can compare the original series (Table A1) and the final seasonally adjusted series (Table D11) by plotting them together as shown in Figure 37.2. These tables are requested in the OUTPUT statement and are written to the OUT= data set. Note that the default variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name.

```
proc x12 data=sales date=date noprint;
    var sales;
    x11;
    output out=out a1 d11;
run;

proc sgplot data=out;
    series x=date y=sales_A1 / name = "A1" markers
        markerattrs=(color=red symbol='asterisk')
        lineattrs=(color=red);
    series x=date y=sales_D11 / name= "D11" markers
        markerattrs=(symbol='circle')
        lineattrs=(color=blue);
    yaxis label='Original and Seasonally Adjusted Time Series';
run;
```

Figure 37.2 Plot of Original and Seasonally Adjusted Data

Syntax: X12 Procedure

The X12 procedure uses the following statements:

```

PROC X12 options ;
  VAR variables ;
  BY variables ;
  ID variables ;
  EVENT variables < / options > ;
  USERDEFINED variables ;
  TRANSFORM options ;
  ADJUST option ;
  IDENTIFY options ;
  PICKMDL options ;
  AUTOMDL options ;
  OUTLIER options ;
  REGRESSION options ;
  INPUT variables < / options > ;
  ARIMA option ;
  ESTIMATE options ;
  X11 options ;
  FORECAST options ;
  CHECK options ;
  SEATSDECOMP OUT= SAS-data-set < options > ;
  OUTPUT OUT= SAS-data-set < YEARSEAS > tablename1 tablename2 ... ;
  TABLES tablename1 tablename2 ... options ;

```

The statements used by PROC X12 perform basically the same function as the Census Bureau's X-12-ARIMA specs (specifications). *Specs* are used in X-12-ARIMA to control the computations and output. The PROC X12 statement performs some of the same functions as the Series spec in the Census Bureau's X-12-ARIMA software. The ADJUST statement performs some of the same functions as the Transform spec. The ARIMA, AUTOMDL, CHECK, ESTIMATE, FORECAST, IDENTIFY, OUTLIER, PICKMDL, REGRESSION, TRANSFORM, and X11 statements are designed to perform the same functions as the corresponding X-12-ARIMA specs, although full compatibility is not yet available. The Census Bureau documentation *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c) provides added insight to the functionality of these statements. The SEATSDECOMP statement is an experimental statement to provide a SEATS (signal extraction in ARIMA time series) seasonal decomposition for the B1 series that uses the same ARIMA model as is used to model the series. For more information about SEATS, see Gómez and Maravall (1997a, b).

Functional Summary

Table 37.1 summarizes the statements and options that control the X12 procedure.

Table 37.1 X12 Syntax Summary

Description	Statement	Option
Data Set Options		
Specifies the auxiliary data set	PROC X12	AUXDATA=
Specifies the input data set	PROC X12	DATA=
Specifies the user-defined event definition data set	PROC X12	INEVENT=
Specifies regression and ARIMA information	PROC X12	MDLINFOIN=
Outputs regression and ARIMA information	PROC X12	MDLINFOOUT=
Writes summary statistics to an output data set	PROC X12	OUTSTAT=
Writes table values to an output data set	OUTPUT	OUT=
Appends forecasts to the OUTPUT OUT= data set	X11 or FORECAST	OUTFORECAST
Prefixes backcasts to the OUTPUT OUT= data set	FORECAST	OUTBACKCAST
Display Control Options		
Suppresses all displayed output	PROC X12	NOPRINT
Specifies the plots to be displayed	PROC X12	PLOTS=
Specifies the type of spectral plot to be displayed	PROC X12	PERIODOGRAM
Specifies the series for spectral analysis	PROC X12	SPECTRUMSERIES=
Displays automatic model information	AUTOMDL	PRINT=
Specifies the number of lags in regARIMA model residuals ACF and PACF tables and plots	CHECK	MAXLAG=
Displays regARIMA model residuals information	CHECK	PRINT=
Displays the iterations history	ESTIMATE	ITPRINT
Displays information about restarted iterations	ESTIMATE	PRINTERR
Specifies the differencing used in the ARIMA model identification ACF and PACF tables and plots	IDENTIFY	DIFF=
Specifies the seasonal differencing used in the ARIMA model identification ACF and PACF tables and plots	IDENTIFY	SDIFF=
Specifies the number of lags in ARIMA model identification ACF and PACF tables and plots	IDENTIFY	MAXLAG=
Displays regression model parameter estimates	IDENTIFY	PRINTREG

Table 37.1 *continued*

Description	Statement	Option
Requests tables that are not displayed by default	TABLES	
Specifies that the summary line not be displayed	TABLES	NOSUM
Date Information Options		
Specifies the date variable	PROC X12	DATE=
Specifies the date of the first observation	PROC X12	START=
Specifies the beginning or ending date or both of the subset	PROC X12	SPAN=
Specifies the interval of the time series	PROC X12	INTERVAL=
Specifies the interval of the time series	PROC X12	SEASONS=
Declaring the Role of Variables		
Specifies BY-group processing	BY	
Specifies identifying variables	ID	
Specifies the variables to be seasonally adjusted	VAR	
Specifies the user-defined variables that are available for regression	USERDEFINED	
Controlling the Table Computations		
Suppresses trimming of leading and trailing missing values (if they exist)	PROC X12	NOTRIMMISS
Transforms or prior-adjusts the series	TRANSFORM	FUNCTION=
Transforms or prior-adjusts the series	TRANSFORM	POWER=
Adjusts the series by using a predefined adjustment variable	ADJUST	PREDEFINED=
Specifies the maximum number of iterations for estimating AR and MA parameters	ESTIMATE	MAXITER
Specifies the convergence tolerance for nonlinear estimation	ESTIMATE	TOL=
Specifies size of forecast confidence limits	FORECAST	ALPHA=
Specifies the number of backcasts by which to extend the series for seasonal adjustment	FORECAST	NBACKCAST=
Specifies the number of forecasts by which to extend the series for seasonal adjustment	FORECAST	LEAD=
Specifies that one-step-ahead forecasts be computed	FORECAST	OUT1STEP
Specifying Outlier Detection Options		
Specifies automatic outlier detection	OUTLIER	
Specifies the span for outlier detection	OUTLIER	SPAN=
Specifies the outlier types to be detected	OUTLIER	TYPE=
Specifies the critical values for outlier detection	OUTLIER	CV=

Table 37.1 *continued*

Description	Statement	Option
Specifies the critical values for AO outlier detection	OUTLIER	AOCV=
Specifies the critical values for LS outlier detection	OUTLIER	LSCV=
Specifies the critical values for TC outlier detection	OUTLIER	TCCV=
Specifies the alpha value for outlier detection	OUTLIER	ALPHA=
Specifies the method for calculating the critical value for outlier detection based on the alpha value	OUTLIER	CVMETHOD=
Specifies the number of level-shift outliers to consider for forming a temporary level-shift	OUTLIER	LSRUN=
Specifies the rate of decay for temporary change outliers	OUTLIER	TCRATE=
Specifies the method of adding outliers at each iteration	OUTLIER	METHOD=
Specifies the difference in critical values for almost outliers	OUTLIER	ALMOST=
Specifying the Regression Model		
Specifies predefined regression variables	REGRESSION	PREDEFINED=
Specifies user-defined regression variables	REGRESSION	USERVAR=
Specifies user-defined regression variables	INPUT	
Specifies user defined event regression variables	EVENT	
Specifying the ARIMA Model		
Uses the X-12-ARIMA TRAMO-based method to choose a model	AUTOMDL	
Chooses an X-12-ARIMA model from a set that you specify	PICKMDL	
Specifies the ARIMA part of the model	ARIMA	MODEL=
Specifying Automatic Model Detection Options		
Specifies the maximum orders of ARMA polynomials	AUTOMDL	MAXORDER=
Specifies the maximum orders of differencing	AUTOMDL	MAXDIFF=
Specifies the fixed orders of differencing	AUTOMDL	DIFFORDER=
Suppresses fitting of a constant parameter	AUTOMDL	NOINT
Specifies the preference for balanced models	AUTOMDL	BALANCED
Specifies Hannan-Rissanen initial estimation	AUTOMDL	HRINITIAL
Specifies default model acceptance based on Ljung-Box Q	AUTOMDL	ACCEPTDEFAULT

Table 37.1 *continued*

Description	Statement	Option
Specifies the acceptance value for Ljung-Box Q	AUTOMDL	LJUNGBOXLIMIT=
Specifies the percentage by which to reduce the outlier critical value	AUTOMDL	REDUCECV=
Specifies the critical value for ARMA coefficients	AUTOMDL	ARMACV=
Model Diagnostics		
Examines the regARIMA model residuals	CHECK	
Specifying Seasonal Adjustment Options		
Specifies seasonal adjustment	X11	
Specifies the mode of seasonal adjustment decomposition	X11	MODE=
Specifies the seasonal filter	X11	SEASONALMA=
Specifies the sigma limits	X11	SIGMALIM=
Specifies the Henderson trend filter	X11	TRENDMA=
Specifies the D11 calculation method	X11	TYPE=
Specifies the adjustment factors to remove from final seasonally adjusted series	X11	FINAL=
Specifies a method for reconciling the seasonally adjusted series to the original series	X11	FORCE=
Specifies that SEATS seasonal decomposition be output to a data set	SEATSDECOMP	OUT=

PROC X12 Statement

PROC X12 options ;

The PROC X12 statement provides information about the time series to be processed by PROC X12. Either the DATE= or the START= option must be specified. If both options are specified, then a syntax error results and the X12 procedure is not executed.

The original series is displayed in Table A1. If there are missing values in the original series and a regARIMA model is specified or automatically selected, then Table MV1 is displayed. Table MV1 contains the original series with missing values replaced by the predicted values from the fitted model. If outliers are identified and Table A19 is added in the TABLES statement, then the outlier adjusted series is displayed in Table A19. Table B1 is displayed when the original data are altered (for example, through an ARIMA model estimation, prior adjustment factor, or regression) or the series is extended with forecasts.

Although the X-12-ARIMA method handles missing values, there are some restrictions. In order for PROC X12 to process the series, no month or quarter can contain missing values for all years. For instance, if the

third quarter contained only missing values for all years, then processing is skipped for that series. In addition, if more than half the values for a month or a quarter are missing, then a warning message is displayed in the log file, and other errors might occur later in processing. If a series contains many missing values, other methods of missing value replacement should be considered prior to seasonally adjusting the series.

You can specify the following *options* in the PROC X12 statement:

AUXDATA=SAS-data-set

specifies an auxiliary input data set that contains user-defined variables, which are specified in the **INPUT** statement, the **USERVAR=** option in the **REGRESSION** statement, or the **USERDEFINED** statement. The **AUXDATA=** data set can also contain the date variable, which is specified in the **DATE=** option in the PROC X12 statement. If the date variable is present, then the date variable is used to align the observations in the auxiliary data set to the observations in the series that is being processed. The date values must be sorted in ascending order with no gaps or duplications, and the interval must match the interval of the series. If the date variable is not present or valid, then observations in the auxiliary data set are matched by observation number to the series that is being processed. The auxiliary data set does not support BY-group processing. The variables in the auxiliary data set are applied to all BY groups, where the dates of the BY group correspond to the dates of the auxiliary data set. [Example 37.11](#) shows the use of the **AUXDATA=** data set.

DATA=SAS-data-set

specifies the input SAS data set to use. If this option is omitted, the most recently created SAS data set is used.

DATE=variable

DATEVAR=variable

specifies a variable that gives the date for each observation. Unless specified in the **SPAN=** option, the starting and ending dates are obtained from the first and last values of the BY group for the **DATE=** variable, which must contain SAS date or datetime values. The procedure checks values of the **DATE=** variable to ensure that the input observations are sequenced correctly in ascending order. If the **INTERVAL=** option or the **SEASONS=** option is specified, the values of the date variable must be consistent with the specified seasonality or interval. If neither the **INTERVAL=** option nor the **SEASONS=** option is specified, then the procedure tries to determine the type of data from the values of the date variable. This variable is automatically added to the **OUT=** data set if a data set is requested in an **OUTPUT** statement, and the date values for the variable are extrapolated if necessary. If the **DATE=** option is not specified, the **START=** option must be specified.

INEVENT=SAS-data-set

specifies the input data set that defines any user-defined event variables. This option can be omitted if events are not specified or if only SAS predefined events are specified in an **EVENT** statement. For more information about the format of this data set, see the section “[INEVENT= Data Set](#)” on page 2739.

INTERVAL=interval

specifies the frequency of the input time series. If the input data consist of quarterly observations, then **INTERVAL=QTR** should be used. If the input data consist of monthly observations, then **INTERVAL=MONTH** should be used. If the **INTERVAL=** option is not specified and **SEASONS=4**, then **INTERVAL=QTR** is assumed; likewise, **SEASONS=12** implies **INTERVAL=MONTH**. If both the **INTERVAL=** option and the **SEASONS=** option are specified, the values should not be conflicting. If neither the **INTERVAL=** option nor the **SEASONS=** option is specified and the **START=** option is

specified, then the data are assumed to be monthly. If a date variable is specified using the DATE= option, it is not necessary to specify the INTERVAL= option or the SEASONS= option; however, if specified, the values of the INTERVAL= option or the SEASONS= option should not be in conflict with the values of the date variable. See Chapter 4, “[Date Intervals, Formats, and Functions](#),” for more details about intervals.

MDLINFOIN=SAS-data-set

specifies an optional input data set that contains model information that can replace the information contained in the TRANSFORM, REGRESSION, ARIMA, and AUTOMDL statements. The MDLINFOIN= data set can contain BY-group and series names. It is useful for providing specific information about each series to be seasonally adjusted. See the section “[MDLINFOIN= and MDLINFOOUT= Data Sets](#)” on page 2737 for details.

MDLINFOOUT=SAS-data-set

specifies the optional output data set that contains the transformation, regression, and ARIMA information related to each seasonally adjusted series. The data set is sorted by the BY-group variables, if any, and by series names. The MDLINFOOUT= data set can be used as input for the MDLINFOIN= option. See the section “[MDLINFOIN= and MDLINFOOUT= Data Sets](#)” on page 2737 for details.

NOPRINT

suppresses any printed output.

NOTRIMMISS

suppresses the default, by which leading and trailing missing values are trimmed from each variable listed (or implied) in the VAR statement. If you specify the NOTRIMMISS option, PROC X12 treats leading and trailing missing values in the same manner as it treats embedded missing values. For information about the treatment of embedded missing values, see the section “[Missing Values](#)” on page 2720. Missing values are not supported in the regression variables that you specify in the REGRESSION, INPUT, or USERDEFINED statement; therefore, leading and trailing missing values are always trimmed from user-defined regressors even if you specify NOTRIMMISS.

OUTSTAT=SAS-data-set

specifies an optional output data set which contains the summary statistics that related to each seasonally adjusted series. The data set is sorted by the BY-group variables, if any, and by series names. See the section “[OUTSTAT= Data Set](#)” on page 2740 for details.

PERIODOGRAM

specifies that the PERIODOGRAM rather than the spectrum of the series be plotted in the G tables and plots. If PERIODOGRAM is not specified, then the spectrum is plotted in the G tables.

PLOTS<(global-plot-options)> <= plot-request <(options)>>

PLOTS<(global-plot-options)> <= (plot-request <(options)> <... plot-request <(options)>>>

controls the plots that are produced through ODS Graphics. When you specify only one plot request, you can omit the parentheses around the plot request.

Following are some examples of the PLOTS= option:

```
plots=none
plots=all
plots=residual (none)
plots (only)=(series (acf pacf) residual (hist))
```

ODS Graphics must be enabled before you request plots. For example:

```
ods graphics on;

proc x12 data=sales date=date;
  var sales;
  identify diff=(0,1) sdiff=(0,1);
run;
```

Since no specific plot is requested in this program, the default plots associated with the PROC X12 and IDENTIFY statements are produced.

For general information about ODS Graphics, see Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*). If you have enabled ODS Graphics but do not specify any specific plot request, then the default plots that are associated with each of the PROC X12 statements used in the program are produced. Line printer plots are suppressed when ODS Graphics is enabled.

If NONE is specified in an option, then no plots are produced for that option. If ALL is specified without NONE in an option, then all plots are produced for that option.

Global Plot Options:

The *global-plot-options* apply to all relevant plots that are generated by the X12 procedure. The following *global-plot-option* is supported:

ONLY

suppresses the default plots. Only the plots specifically requested are produced.

Specific Plot Options:

The following list describes the specific plots and their *options*:

ALL

produces all plots that are appropriate for the particular analysis.

NONE

suppresses all plots.

ADJUSTED(< sa-plot-options >)

SA(< sa-plot-options >)

produces plots of the seasonally adjusted series that results from the decomposition specified in the X11 statement. The SPECTRUM plot is produced by default.

The following *sa-plot-options* are available:

ALL

produces all seasonally adjusted plots.

NONE

suppresses all seasonally adjusted plots.

SPECTRUM

produces the spectral plot of Table G1. Table G1 is calculated based on the modified seasonally adjusted series (Table E2). The data is first-differenced and transformed as specified in the **TRANSFORM** statement. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the **PERIODOGRAM** option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

FORECAST(< forecast-plot-options >)

produces the regARIMA model forecast plots if the **FORECAST** statement is specified. The FORECAST plot is produced by default. The following *forecast-plot-options* are available:

ALL

produces all the forecast plots that are appropriate for the particular analysis.

FORECAST

plots the actual time series and its one-step-ahead forecast over the historical period, and plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

FORECASTONLY

plots the forecast and its confidence bands over the forecast horizon only.

MODELFORECASTS

plots the one-step-ahead model forecast and its confidence bands in the historical period; plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

MODELS

plots the one-step-ahead model forecast and its confidence bands in the historical period. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts.

NONE

suppresses all the forecast plots.

TRANSFORECAST

plots the transformed time series and its one-step-ahead forecast over the historical period; plots the forecast and its confidence bands over the forecast horizon. The **OUT1STEP** option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSFORECAST plot is available only if the data have been transformed using the **TRANSFORM** statement.

TRANSFORECASTONLY

plots the forecast of the transformed series and its confidence bands over the forecast horizon only. The TRANSFORECASTONLY plot is available only if the data have been transformed using the [TRANSFORM](#) statement.

TRANSMODELFORECASTS

plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period; plots the forecast and its confidence bands over the forecast horizon. The [OUT1STEP](#) option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSMODELFORECASTS plot is available only if the data have been transformed using the [TRANSFORM](#) statement.

TRANSMODELS

plots the one-step-ahead model forecast of the transformed series and its confidence bands in the historical period. The [OUT1STEP](#) option must be specified in the FORECAST statement in order for the X12 procedure to calculate the one-step-ahead forecasts. The TRANSMODELS plot is available only if the data have been transformed using the [TRANSFORM](#) statement.

IRREGULAR(< ic-plot-options >)**IC(< ic-plot-options >)**

produces plots of the irregular series that results from the decomposition specified in the [X11](#) statement. The SPECTRUM plot is produced by default.

The following *ic-plot-options* are available:

ALL

produces all irregular plots.

NONE

suppresses all irregular plots.

SPECTRUM

produces the spectral plot of Table G2. Table G2 is calculated based on the modified irregular series (Table E3). The data is first-differenced and transformed as specified in the [TRANSFORM](#) statement. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the [PERIODOGRAM](#) option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

RESIDUAL(< residual-plot-options >)

produces the regARIMA model residual series plots if the [CHECK](#) statement is specified. The ACF, PACF, HIST, SQACF, and SPECTRUM plots are produced by default. The following *residual-plot-options* are available:

ACF

produces the plot of residual autocorrelations.

ALL

produces all the residual diagnostics plots that are appropriate for the particular analysis.

HIST

produces the histogram of the residuals and also the residual outliers and residual statistics tables that describe the residual histogram.

NONE

suppresses all the residual diagnostics plots.

PACF

produces the plot of residual partial-autocorrelations if PRINT=PACF is specified in the CHECK statement.

SPECTRUM

produces the spectral plot of Table GRs. Table GRs is calculated based on the regARIMA model residual series. By default, the type of spectral estimate used to calculate the spectral plot is the spectrum. If the **PERIODOGRAM** option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

SQACF

produces the plot of squared residual autocorrelations.

SERIES(< series-plot-options >)

produces plots that are associated with the identification stage of the modeling. The ACF, PACF, and SPECTRUM plots are produced by default. The following *series-plot-options* are available:

ACF

produces the plot of autocorrelations.

ALL

produces all the plots that are associated with the identification stage.

NONE

suppresses all plots that are associated with the identification stage.

PACF

produces the plot of partial-autocorrelations.

SPECTRUM

produces the spectral plot of Table G0. Table G0 is calculated based on either Table A1, A19, B1 or E1, as specified by the **SPECTRUMSERIES=** option. The original data is first-differenced and transformed as specified in the **TRANSFORM** statement. By default, the type of spectral estimate that is used to calculate the spectral plot is the spectrum. If the **PERIODOGRAM** option is specified in the PROC X12 statement, then the periodogram of the series is used to calculate the spectral plot.

SEASONS=number

specifies the number of observations in a seasonal cycle. If the SEASONS= option is not specified and INTERVAL=QTR, then SEASONS=4 is assumed. If the SEASONS= option is not specified and INTERVAL=MONTH, then SEASONS=12 is assumed. If the SEASONS= option is specified, its value should not conflict with the values of the INTERVAL= option or the values of the date variable. See the preceding descriptions for the START=, DATE=, and INTERVAL= options for more details.

SPAN=(*mmmyy* ,*mmmyy*)

SPAN=('yyQq' , 'yyQq')

specifies the dates of the first and last observations to define a subset for processing. A single date in parentheses is interpreted to be the starting date of the subset. To specify only the ending date, use **SPAN**=(*mmmyy*). If the starting or ending date is omitted, then the first or last date, respectively, of the input data set or BY group is assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified; if a two-digit year is specified, the value specified in the **YEARCUTOFF**= SAS system option applies.

SPECTRUMSERIES=*table-name*

specifies the table name of the series that is used in the spectrum of the original series (Table G0). The table names that can be specified are A1, A19, B1, or E1. The default is B1.

START=*mmmyy*

START='yyQq'

STARTDATE=*mmmyy*

STARTDATE='yyQq'

specifies the date of the first observation. Unless the **SPAN**= option is used, the starting and ending dates are the dates of the first and last observations, respectively. Either this option or the **DATE**= option is required. When using this option, use either the **INTERVAL**= option or the **SEASONS**= option to specify monthly or quarterly data. If neither the **INTERVAL**= option nor the **SEASONS**= option is present, monthly data are assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified; if a two-digit year is specified, the value specified in the **YEARCUTOFF**= SAS system option applies. When using the **START**= option with BY processing, the start date is applied to the first observation in each BY group.

ADJUST Statement

ADJUST *option* ;

The **ADJUST** statement adjusts the series for leap year and length-of-period factors prior to estimating a regARIMA model. The “Prior Adjustment Factors” table is associated with the **ADJUST** statement.

The following *option* can appear in the **ADJUST** statement:

PREDEFINED=**LOM** | **LOQ** | **LPYEAR**

specifies length-of-month adjustment, length-of-quarter adjustment, or leap year adjustment. **PREDEFINED**=**LOM** and **PREDEFINED**=**LOQ** are equivalent because the actual adjustment is determined by the interval of the time series. Also, because leap year adjustment is a limited form of length-of-period adjustment, only one type of predefined adjustment can be specified. The **PREDEFINED**= option should not be used in conjunction with **PREDEFINED**=**TD** or **PREDEFINED**=**TD1COEF** in the **REGRESSION** statement or **MODE**=**ADD** or **MODE**=**PSEUDOADD** in the **X11** statement. **PREDEFINED**=**LPYEAR** cannot be specified unless the series is log transformed.

If the series is to be transformed by using a Box-Cox or logistic transformation, the series is first adjusted according to the **ADJUST** statement, and then it is transformed.

In the case of a length-of-month adjustment for the series with observations Y_t , each observation is first divided by the number of days in that month, m_t , and then multiplied by the average length of month (30.4375), resulting in $(30.4375 \times Y_t)/m_t$. Length-of-quarter adjustments are performed in a similar manner, resulting in $(91.3125 \times Y_t)/q_t$, where q_t is the length in days of quarter t .

Forecasts of the transformed and adjusted data are transformed and adjusted back to the original scale for output.

ARIMA Statement

ARIMA option ;

The ARIMA statement specifies the ARIMA part of the regARIMA model. This statement defines a pure ARIMA model if no [REGRESSION statements](#), [INPUT statements](#), or [EVENT statements](#) are specified. The ARIMA part of the model can include multiplicative seasonal factors.

The following *option* can appear in the ARIMA statement:

MODEL=((p d q) (P D Q) s)

specifies the ARIMA model. The format follows standard Box-Jenkins notation (Box, Jenkins, and Reinsel 1994). The nonseasonal AR and MA orders are given by p and q , respectively, while the seasonal AR and MA orders are given by P and Q . The number of differences and seasonal differences are given by d and D , respectively. The notation (p d q) and (P D Q) can also be specified as (p , d , q) and (P , D , Q). The maximum lag of any AR or MA parameter is 36. The maximum value of a difference order, d or D , is 144. All values for p , d , q , P , D , and Q should be nonnegative integers. The seasonality parameter, s , should be a positive integer. If s is omitted, it is set equal to the value that is specified in the SEASONS= option in the PROC X12 statement.

For example, the following statements specify an ARIMA (2,1,1)(1,1,0)12 model:

```
proc x12 data=ICMETI seasons=12 start=jan1968;
    arima model=((2,1,1) (1,1,0));
```

AUTOMDL Statement

AUTOMDL options ;

The AUTOMDL statement invokes the automatic model selection procedure of the X-12-ARIMA method. This method is based largely on the TRAMO (time series regression with ARIMA noise, missing values, and outliers) method by Gómez and Maravall (1997a, b). If the AUTOMDL statement is used without the OUTLIER statement, then only missing values regressors are included in the regARIMA model. If both the AUTOMDL and the OUTLIER statements are used, then both missing values regressors and regressors for automatically identified outliers are included in the regARIMA model. For more information about missing value regressors, see the section “[Missing Values](#)” on page 2720.

If both the AUTOMDL statement and the ARIMA statement are present, the ARIMA statement is ignored. The ARIMA statement specifies the model, but the AUTOMDL statement allows the X12 procedure to select the model. If the AUTOMDL statement is specified and a data set is specified in the MDLINFOIN= option

in the PROC X12 statement, then the AUTOMDL statement is ignored if the specified data set contains a model specification for the series. If no model for the series is specified in the MDLINFOIN= data set, the AUTOMDL or ARIMA statement is used to determine the model. Thus, it is possible to give a specific model for some series and automatically identify the model for other series by using both the MDLINFOIN= option and the AUTOMDL statement.

When the AUTOMDL statement is specified, the X12 procedure compares a model selected using a TRAMO method to a default model. The TRAMO method is implemented first, and involves two parts: identifying the orders of differencing and identifying the ARIMA model. The table “ARIMA Estimates for Unit Root Identification” provides details about the identification of the orders of differencing, and the table “Results of Unit Root Test for Identifying Orders of Differencing” shows the orders of differencing selected by TRAMO. The table “Models Estimated by Automatic ARIMA Model Selection Procedure” provides details regarding the TRAMO automatic model selection, and the table “Best Five ARIMA Models Chosen by Automatic Modeling” ranks the best five models estimated using the TRAMO method. The “Comparison of Automatically Selected Model and Default Model” table compares the model selected by the TRAMO method to a default model. At this point in the processing, if the default model is selected over the TRAMO model, then PROC X12 displays a note. No note is displayed if the TRAMO model is selected. PROC X12 then performs checks for unit roots, over-differencing, and insignificant ARMA coefficients. If the model is changed due to any of these tests, a note is displayed. The last table, “Final Automatic Model Selection,” shows the results of the automatic model selection.

The following *options* can appear in the AUTOMDL statement:

ACCEPTDEFAULT

specifies that the default model be chosen if its Ljung-Box Q is acceptable.

ARMACV=value

specifies the threshold value for the t statistics that are associated with the highest-order ARMA coefficients. As a check of model parsimony, the parameter estimates and t statistics of the highest-order ARMA coefficients are examined to determine whether the coefficient is insignificant. An ARMA coefficient is considered to be insignificant if the t value that is displayed in the table “Exact ARMA Maximum Likelihood Estimation” is below the value specified in the ARMACV= option and the absolute value of the parameter estimate is reliably close to zero. The absolute value is considered to be *reliably close to zero* if it is below 0.15 for 150 or fewer observations or is below 0.1 for more than 150 observations. If the highest-order ARMA coefficient is found to be insignificant, then the order of the ARMA model is reduced. For example, if AUTOMDL identifies a (3 1 1)(0 0 1) model and the parameter estimate of the seasonal MA lag of order 1 is -0.09 and its t value is -0.55 , then the ARIMA model is reduced to at least (3 1 1)(0 0 0). After the model is reestimated, the check for insignificant coefficients is performed again. If ARMACV=0.54 is specified in the preceding example, then the coefficient is not found to be insignificant and the model is not reduced.

If a constant is allowed in the model and if the t value associated with the constant parameter estimate is below the ARMACV= critical value, then the constant is considered to be insignificant and is removed from the model. Note that if a constant is added to or removed from the model and then the ARIMA model changes, then the t statistic for the constant parameter estimate also changes. Thus, changing the ARMACV= value does not necessarily add or remove a constant term from the model.

The value specified in the ARMACV= option should be greater than zero. The default value is 1.0.

BALANCED

specifies that the automatic modeling procedure prefer balanced models over unbalanced models. A balanced model is one in which the sum of the AR, seasonal AR, differencing, and seasonal differencing orders equals the sum of the MA and seasonal MA orders. Specifying BALANCED gives the same preference as the TRAMO program. If BALANCED is not specified, all models are given equal consideration.

DIFFORDER=(*nonseasonal-order, seasonal-order*)

specifies the fixed orders of differencing to be used in the automatic ARIMA model identification procedure. When the DIFFORDER= option is used, only the AR and MA orders are automatically identified. Acceptable values for the regular (nonseasonal) differencing orders are 0, 1, and 2; acceptable values for the seasonal differencing orders are 0 and 1. If the MAXDIFF= option is also specified, then the DIFFORDER= option is ignored. There are no default values for DIFFORDER. If neither the DIFFORDER= option nor the MAXDIFF= option is specified, then the default is MAXDIFF=(2,1).

HRINITIAL

specifies that Hannan-Rissanen estimation be done before exact maximum likelihood estimation to provide initial values. If the HRINITIAL option is specified, then models for which the Hannan-Rissanen estimation has an unacceptable coefficient are rejected.

LJUNGBOXLIMIT=*value*

specifies acceptance criteria for the confidence coefficient of the Ljung-Box Q statistic. If the Ljung-Box Q for a final model is greater than this value, the model is rejected, the outlier critical value is reduced, and outlier identification is redone with the reduced value. See the REDUCECV option for more information. The value specified in the LJUNGBOXLIMIT= option must be greater than 0 and less than 1. The default value is 0.95.

MAXDIFF=(*nonseasonal-order, seasonal-order*)

specifies the maximum orders of regular and seasonal differencing for the automatic identification of differencing orders. When MAXDIFF is specified, the differencing orders are identified first, and then the AR and MA orders are identified. Acceptable values for the regular differencing orders are 1 and 2. The only acceptable value for the seasonal differencing order is 1. If both the MAXDIFF= option and the DIFFORDER= option are specified, then the DIFFORDER= option is ignored. If neither the DIFFORDER= nor the MAXDIFF= option is specified, the default is MAXDIFF=(2,1).

MAXORDER=(*nonseasonal-order, seasonal-order*)

specifies the maximum orders of nonseasonal and seasonal ARMA polynomials for the automatic ARIMA model identification procedure. The maximum order for the nonseasonal ARMA parameters is 4, and the maximum order for the seasonal ARMA is 2.

NOINT

suppresses the fitting of a constant or intercept parameter in the model.

PRINT=(*value-list*)

specifies the tables to be displayed in the output. You can specify the following values in *value-list*:

NONE	suppresses all automatic modeling output.
ALL	includes all automatic modeling tables in the output if NONE is not specified.

ONLY	specifies that only the listed tables be output.
AUTOCHOICE	displays the tables titled “Comparison of Automatically Selected Model and Default Model” and “Final Automatic Model Selection.” The “Comparison of Automatically Selected Model and Default Model” table compares a default model to the model chosen by the TRAMO-based automatic modeling method. The “Final Automatic Model Selection” table indicates which model has been chosen automatically. These tables are output by default unless NONE or ONLY is specified in the PRINT= option.
AUTOCHOICEMDL	displays the table “Models Estimated by Automatic ARIMA Model Selection Procedure.” This table summarizes the various models that were considered by the TRAMO automatic model selection method and their measures of fit.
BEST5MODEL	displays the table “Best Five ARIMA Models Chosen by Automatic Modeling.” This table ranks the five best models that were considered by the TRAMO automatic modeling method.
UNITROOTTEST	causes the table titled “Results of Unit Root Test for Identifying Orders of Differencing” to be printed. This table displays the orders that were automatically selected by the AUTOMDL statement. Unless the nonseasonal and seasonal differences are specified using the DIFFORDER= option, the AUTOMDL statement automatically identifies the orders of differencing. These tables are output by default unless NONE or ONLY is specified in the PRINT= option.
UNITROOTTESTMDL	displays the table titled “ARIMA Estimates for Unit Root Identification.” This table summarizes the various models that were considered by the TRAMO automatic selection method while identifying the orders of differencing and the statistics associated with those models. The unit root identification method first attempts to obtain the coefficients by using the Hannan-Rissanen method. If Hannan-Rissanen estimation cannot be performed, the algorithm attempts to obtain the coefficients by using conditional likelihood estimation.

The default output tables are the tables specified by the AUTOCHOICE and UNITROOTTEST options.

REDUCECV=value

specifies the percentage by which the outlier critical value be reduced when a final model is found to have an unacceptable confidence coefficient for the Ljung-Box Q statistic. This value should be between 0 and 1. The default value is 0.14286.

BY Statement

BY *variables* ;

A BY statement can be used with PROC X12 to obtain separate analyses on observations in groups defined by the BY variables. When a BY statement appears, the procedure expects the input DATA= data set to be sorted in order of the BY variables.

CHECK Statement

CHECK *options* ;

The CHECK statement produces statistics for diagnostic checking of residuals from the estimated regARIMA model.

The following tables that are associated with diagnostic checking are displayed in the output: “Autocorrelation of regARIMA Model Residuals,” “Partial Autocorrelation of regARIMA Model Residuals,” “Autocorrelation of Squared regARIMA Model Residuals,” “Outliers of the Unstandardized Residuals,” “Summary Statistics for the Unstandardized Residuals,” “Normality Statistics for regARIMA Model Residuals,” and “Table G Rs: 10*LOG(SPECTRUM) of the regARIMA Model Residuals.” If ODS graphics is enabled, the following plots that are associated with diagnostic checking output are produced: the autocorrelation function (ErrorACF) plot of the residuals, the partial autocorrelation function (ErrorPACF) plot of the residuals, the autocorrelation function (SqErrorACF) plot of the squared residuals, a histogram (ResidualHistogram) of the residuals, and a spectral plot (SpectralPlot) of the residuals. See the [PLOTS=RESIDUAL](#) option in the PROC X12 statement for further information about controlling the display of plots.

The residual histogram displayed by the X12 procedure shows the distribution of the unstandardized, uncentered regARIMA model residuals; the residual histogram displayed by the U.S. Census Bureau’s X-12-ARIMA seasonal adjustment program displays standardized and mean-centered residuals.

The following *options* can appear in the CHECK statement:

MAXLAG=value

specifies the number of lags for the residual sample autocorrelation function (ACF) and partial autocorrelation function (PACF). The default is 36 for monthly series and 12 for quarterly series. The minimum value for MAXLAG= is 1.

For the table “Autocorrelation of Squared regARIMA Model Residuals” and the corresponding SqErrorACF plot, the maximum number of lags calculated is 12 for monthly series and 4 for quarterly series. The MAXLAG= option can only reduce the number of lags for this table and plot.

PRINT=ALL | NONE

PRINT=ACF | ACFSQUARED | NORM | PACF

PRINT=RESIDUALOUTLIER | RESIDUALSTATISTICS | SPECRESIDUAL

PRINT=(*options*)

specifies the diagnostic checking tables to be displayed. If the PRINT= option is not specified, the default is equivalent to specifying PRINT=(ACF ACFSQUARED NORM RESIDUALOUTLIER RESIDUALSTATISTICS SPECRESIDUAL). If PRINT=NONE is specified and no other PRINT= option is specified, then none of the tables that are associated with diagnostic checking are displayed. However, PRINT=NONE has no effect if other PRINT= options are specified in the CHECK statement. PRINT=ALL specifies that all tables related to diagnostic checking be displayed.

PRINT=ACF displays the table titled “Autocorrelation of regARIMA Model Residuals.”

PRINT=ACFSQUARED displays the table titled “Autocorrelation of Squared regARIMA Model Residuals.”

PRINT=NORM displays the table titled “Normality Statistics for regARIMA Model Residuals”. Measures of normality included in this table are skewness, Geary’s *a* statistic, and kurtosis.

PRINT=PACF displays the table titled “Partial Autocorrelation of regARIMA Model Residuals.”

PRINT=RESIDUALOUTLIER or PRINT=RESOUTLIER displays the table “Outliers of the Unstandardized Residuals” if the residuals contain outliers.

PRINT=RESIDUALSTATISTICS or PRINT=RESSTAT displays the table titled “Summary Statistics for the Unstandardized Residuals.”

ESTIMATE Statement

ESTIMATE *options* ;

The ESTIMATE statement estimates the regARIMA model. The regARIMA model is specified by the REGRESSION, INPUT, EVENT, and ARIMA statements or by the MDLINFOIN= data set in the PROC X12 statement. Estimation output includes point estimates and standard errors for all estimated AR, MA, and regression parameters; the maximum likelihood estimate of the variance σ^2 ; t statistics for individual regression parameters; χ^2 statistics for assessing the joint significance of the parameters associated with certain regression effects (if included in the model); and likelihood-based model selection statistics (if the exact likelihood function is used). The regression effects for which χ^2 statistics are produced are fixed seasonal effects.

Tables displayed in the output associated with estimation are “Exact ARMA Likelihood Estimation Iteration Tolerances,” “Average Absolute Percentage Error in within-Sample Forecasts,” “ARMA Iteration History,” “AR/MA Roots,” “Exact ARMA Likelihood Estimation Iteration Summary,” “Regression Model Parameter Estimates,” “Chi-Squared Tests for Groups of Regressors,” “Exact ARMA Maximum Likelihood Estimation,” and “Estimation Summary.”

The following *options* can appear in the ESTIMATE statement:

ITPRINT

specifies that the “Iteration History” table be displayed. This table includes detailed output for estimation iterations, including log-likelihood values, parameters, counts of function evaluations, and iterations. It is useful to examine the “Iteration History” table when errors occur within estimation iterations. By default, only successful iterations are displayed, unless the PRINTERR option is specified. An unsuccessful iteration is an iteration that is restarted due to a problem such as a root inside the unit circle. Successful iterations have a status of 0. If restarted iterations are displayed, a note at the end of the table gives definitions for status codes that indicate a restarted iteration. For restarted iterations, the number of function evaluations and the number of iterations is –1, which is displayed as missing. If regression parameters are included in the model, then both IGLS and ARMA iterations are included in the table. The number of function evaluations is a cumulative total.

MAXITER=*value*

specifies the maximum number of iterations used in estimating the AR and MA parameters. For models with regression variables, this limit applies to the total number of ARMA iterations over all iterations of the iterative generalized least squares (IGLS) algorithm. For models without regression variables, this is the maximum number of iterations allowed for the set of ARMA iterations. The default is MAXITER=200.

PRINTERR

causes restarted iterations to be included in the “Iteration History” table if ITPRINT is specified; creates the “Restarted Iterations” table if ITPRINT is not specified. Whether or not PRINTERR is specified, a WARNING message is printed to the log file if any iteration is restarted during estimation.

TOL=value

specifies the convergence tolerance for the nonlinear estimation. Absolute changes in the log-likelihood are compared to the TOL= value to check convergence of the estimation iterations. For models with regression variables, the TOL= value is used to check convergence of the IGLS iterations (where the regression parameters are reestimated for each new set of AR and MA parameters). For models without regression variables, there are no IGLS iterations, and the TOL= value is then used to check convergence of the nonlinear iterations that are used to estimate the AR and MA parameters. The default value is TOL=0.00001. The minimum tolerance value is a positive value based on the machine precision and the length of the series. If a tolerance less than the minimum supported value is specified, an error message is displayed and the series is not processed.

EVENT Statement

EVENT *variables* < / *options* > ;

The EVENT statement specifies events to be included in the regression portion of the regARIMA model. Multiple EVENT statements can be specified. Dummy variable values for EVENT variables are generated by the X12 procedure, however, the EVENT variables are input as user-defined regression effects to the X-12-ARIMA method. Thus, the EVENT variables are treated in the same manner as it treats variables specified in the **USERVAR=** option in the **REGRESSION** statement. If a **MDLINFOIN=** data set is not specified in the PROC X12 statement, then all variables specified in the EVENT statements are applied to all BY groups and all time series that are processed. If a MDLINFOIN= data set is specified, then the EVENT statements apply only if no regression information for the BY group and series is available in the MDLINFOIN= data set. The events specified in the EVENT statements either must be SAS predefined events or must be defined in the data set specified in the **INEVENT=** option in the PROC X12 statement. For a summary of SAS predefined events, see the section “[SAS Predefined Events](#)” on page 2721.

The EVENT statement can also be used to include outlier, level-shift, and temporary change regressors that are available as predefined U.S. Census Bureau variables in the X-12-ARIMA program. For example, the following statements specify an additive outlier in January 1970 and a level-shift that begins in July 1971:

```
proc x12 data=ICMETI seasons=12 start=jan1968;
  event AO01JAN1970D CBL01JUL1971D;
```

The following statements specify an additive outlier in the second quarter 1970 and a temporary change that begins in the fourth quarter 1971:

```
proc x12 data=ICMETI seasons=4 start='1970q1';
  event AO01APR1970D TC01OCT1971D;
```

The following *options* can appear in the EVENT statement:

B=(value <F> ...)

specifies initial or fixed values for the EVENT parameters in the order in which they appear in *variables*. Each B= list applies to the variable list that immediately precedes the slash.

For example, the following statements set an initial value of 1 for the event, x:

```
event y ;
event x / b=1 2 ;
```

In this example, the B= option applies only to the second EVENT statement. The value 2 is discarded because there is only one variable in the variable list.

To assign an initial value of 1 to the y regressor and 2 to the x regressor, use the following statements:

```
event y / b=1;
event x / b=2 ;
```

An **F** immediately following the numerical value indicates that this is not an initial value, but a fixed value. See [Example 37.8](#) for an example that uses fixed parameters. In PROC X12, individual parameters can be fixed while other parameters in the same model are estimated.

USERTYPE=(values)

enables a user-defined variable to be processed in the same manner as a U.S. Census predefined variable. You can specify the following *values*: AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For example, the U.S. Census Bureau EASTER(*w*) regression effects are included the “RegARIMA Holiday Component” table (A7). Specify USERTYPE=EASTER to include an event variable that is processed exactly as the U.S. Census predefined EASTER(*w*) variable, including inclusion in the A7 table. The **NOAPPLY=** option in the **REGRESSION** statement also changes the processing of variables based on the USERTYPE= value. [Table 37.4](#) shows the regression types that are associated with each regression effects table.

Each USERTYPE= list applies to the variable list that immediately precedes the slash. The same rules for assigning B= values to regression variables apply for USERTYPE= options. For example, the following statements specify that the event in the variable MyEaster be processed exactly as the U.S. Census predefined LOM variable:

```
event MyLOM;
event MyEaster / usertype=LOM EASTER;
```

In this example, the USERTYPE= option applies only to the MyEaster variable in the second EVENT statement. The USERTYPE value **EASTER** is discarded because there is only one variable in the variable list.

To assign the USERTYPE value **LOM** to the MyLOM variable and **EASTER** to the MyEaster variable, use the following statements:

```
event MyLOM / usertype=LOM;
event MyEaster / usertype=EASTER;
```

The following `USERTYPE=` options specify that the regression effect be removed from the seasonally adjusted series: `EASTER`, `HOLIDAY`, `LABOR`, `LOM`, `LOMSTOCK`, `LOQ`, `LPYEAR`, `SCEASTER`, `SEASONAL`, `TD`, `TDSTOCK`, `THANKS`, and `USER`. When a regression effect is removed from the seasonally adjusted series, the level (mean) of the seasonally adjusted series can be altered. It is often desirable to use a zero-mean (mean-adjusted) regressor for effects that are to be removed from the seasonally adjusted series. See [Example 37.6](#) for an example showing the effects of specifying a zero-mean regressor.

FORECAST Statement

FORECAST *options* ;

The **FORECAST** statement uses the estimated model to forecast the time series. The output contains point forecasts and forecast statistics for the transformed and original series. Whenever forecasts or backcasts (or both) are generated and seasonal adjustment is performed, the forecasts and backcasts are appended to the original series, and the seasonal adjustment procedures are applied to the forecast or backcast (or both) extended series. If the **FORECAST** statement is not specified, but a **regARIMA** model is specified using either the **ARIMA** or **AUTOMDL** statement, then the series is extended one year ahead by default.

Tables that contain forecasts, standard errors, and confidence limits are displayed in association with the **FORECAST** statement. If the data is transformed, then two tables are displayed: one table for the original data, and one table for the transformed data. Data from these tables can be output to a SAS data set using ODS. The auxiliary variable `_SCALE_` is included in forecast data sets that are output using ODS. The value of `_SCALE_` is “Original” or “Transformed” to indicate the scale of the data. The auxiliary variable can also be used in ODS **SELECT** and ODS **OUTPUT** statements. For example, you can specify the following statements to output the forecasts on the original scale to a data set `forecasts` and the forecasts on the transformed scale to a data set `Tforecasts`:

```
ods output Original.ForecastCL=forecasts;
ods output Transformed.ForecastCL=Tforecasts;
```

The following *options* can appear in the **FORECAST** statement:

ALPHA= α

specifies the size of the upper and lower confidence limits, which are calculated as $1 - \alpha$, where α must be between 0 and 1. By default, **ALPHA**=0.05, which produces 95% confidence intervals.

LEAD=*value*

specifies the number of periods ahead to forecast for **regARIMA** extension of the series. The default is the number of periods in a year (4 or 12), and the maximum is 120. Setting **LEAD**=0 specifies that the series not be extended by forecasts for seasonal adjustment. The **LEAD**= *value* also controls the number of forecasts that are displayed in Table D10.A. However, if the series is not extended by forecasts (**LEAD**=0), then the default year of forecasts is displayed in Table D10.A. Forecast values in Table D10.A are calculated using the method shown on page 148 of Ladiray and Quenneville (2001) based on values that are displayed in Table D10. The **regARIMA** forecasts affect the D10.A forecasts only indirectly through the impact of the **regARIMA** forecasts on the seasonal factors that are shown in Table D10. If the **SEATSDECOMP** statement is specified, then *value* is increased to the minimum required for **SEATS** decomposition. See the section “**SEATS Decomposition**” on page 2729 for details.

NBACKCAST=*value***BACKCAST=***value***NBACK=***value*

specifies the number of periods to backcast for regARIMA extension of the series. The default is NBACKCAST=0, which specifies that the series not be extended with backcasts. The maximum number of backcasts is 120. When the OUTBACKCAST option is specified, the NBACKCAST= value also controls the number of backcasts that are output to the OUT= data set specified in the OUTPUT statement. If the [SEATSDECOMP](#) statement is specified, then *value* is increased to the minimum required for SEATS decomposition. See the section “[SEATS Decomposition](#)” on page 2729 for details.

OUT1STEP

specifies that the one-step-ahead forecasts be computed and displayed in addition to the multistep forecasts. The default is to compute and display only the multistep forecasts beginning at the forecast horizon.

OUTBACKCAST**OUTBKCAST**

determines whether backcasts are included in certain tables sent to the output data set. If OUTBACKCAST is specified, then backcast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include backcasts.

OUTFCST**OUTFORECAST**

determines whether forecasts are included in certain tables sent to the output data set. If OUTFORECAST is specified, then forecast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include forecasts. The OUTFORECAST option can be specified in either the [X11](#) statement or the FORECAST statement with identical results.

ID Statement

ID *variables* ;

If you are creating an output data set, use the ID statement to copy values of the ID variables, in addition to the table values, into the output data set. Or, if the VAR statement is omitted, all numeric variables that are not identified as BY variables, ID variables, the DATE= variable, or user-defined regressors are processed as time series. The ID statement has no effect when a VAR statement is specified and an output data set is not created. If the DATE= variable is specified in the PROC X12 statement, this variable is included automatically in the OUTPUT data set. If no DATE= variable is specified, the variable `_DATE_` is added.

The date variable (or `_DATE_`) values outside the range of the actual data (from forecasting) are extrapolated, while all other ID variables are missing in the forecast horizon.

IDENTIFY Statement

IDENTIFY *options* ;

The IDENTIFY statement produces plots of the sample autocorrelation function (ACF) and partial autocorrelation function (PACF) for identifying the ARIMA part of a regARIMA model. The sample ACF and PACF are produced for all combinations of the nonseasonal and seasonal differences of the data specified by the DIFF= and SDIFF= options.

The original series is first transformed as specified in the TRANSFORM statement.

If the model includes a regression component (specified using the REGRESSION, INPUT, and EVENT statements or the MDLINFOIN= data set in the PROC X12 statement), both the transformed series and the regressors are differenced at the highest order that is specified in the DIFF= and SDIFF= option. The parameter estimates are calculated using the differenced data. Then the undifferenced regression effects (with the exception of a constant term) are removed from the undifferenced data to produce undifferenced regression residuals. The ACFs and PACFs are calculated for the specified differences of the undifferenced regression residuals.

If the model does not include a regression component, then the ACFs and PACFs are calculated for the specified differences of the transformed data.

Tables displayed in association with identification are “Autocorrelation of Model Residuals” and “Partial Autocorrelation of Model Residuals.” If the model includes a regression component (specified using the REGRESSION, INPUT, and EVENT statements or the MDLINFOIN= data set in the PROC X12 statement), then the “Regression Model Parameter Estimates” table is also displayed if the PRINTREG option is specified.

The following *options* can appear in the IDENTIFY statement:

DIFF=(order, order, order)

specifies orders of nonseasonal differencing to use in model identification. The value 0 specifies no differencing, the value 1 specifies one nonseasonal difference $(1 - B)$, the value 2 specifies two nonseasonal differences $(1 - B)^2$, and so forth. The ACFs and PACFs are produced for all orders of nonseasonal differencing specified, in combination with all orders of seasonal differencing that are specified in the SDIFF= option. The default is DIFF=(0). You can specify up to three values for nonseasonal differences.

MAXLAG=value

specifies the number of lags for the sample autocorrelation function (ACF) and partial autocorrelation function (PACF) of the regression residuals for model identification. The default is 36 for monthly series and 12 for quarterly series. MAXLAG applies to both tables and plots. The minimum value for MAXLAG= is 1.

PRINTREG

causes the “Regression Model Parameter Estimates” table to be printed if the REGRESSION statement is present. By default, this table is not printed.

SDIFF=(order, order, order)

specifies orders of seasonal differencing to use in model identification. The value 0 specifies no seasonal differencing, the value 1 specifies one seasonal difference $(1 - B^s)$, the value 2 specifies two seasonal differences $(1 - B^s)^2$, and so forth. The value for s corresponds to the period specified in the SEASONS= option in the PROC X12 statement. The value of the SEASONS= option is supplied explicitly or is implicitly supplied through the INTERVAL= option or the values of the DATE= variable. The ACFs and PACFs are produced for all orders of seasonal differencing specified, in combination with all orders of nonseasonal differencing specified in the DIFF= option. The default is SDIFF=(0). You can specify up to three values for seasonal differences.

For example, the following statement produces ACFs and PACFs for two levels of differencing: $(1 - B)$ and $(1 - B)(1 - B^s)$:

```
identify diff=(1) sdiff=(0, 1);
```

INPUT Statement

INPUT *variables* < / *options* > ;

The INPUT statement specifies variables in the DATA= or AUXDATA= data set (which are specified in the PROC X12 statement) that are to be used as regressors in the regression portion of the regARIMA model. The variables in the data set should contain the values for each observation that define the regressor. Past values of regression variables should also be included in the DATA= or AUXDATA= data set if the time series listed in the VAR statement is to be extended with regARIMA backcasts. Similarly, future values of regression variables should also be included in the DATA= or AUXDATA= data set if the time series listed in the VAR statement is to be extended with regARIMA forecasts.

You can specify multiple INPUT statements. If you do not specify a MDLINFOIN= data set in the PROC X12 statement, then all variables listed in the INPUT statements are applied to all BY groups and all time series that are processed. If you specify a MDLINFOIN= data set, then the INPUT statements apply only if no regression information for the BY group and series is available in the MDLINFOIN= data set.

The INPUT statement provides the same functionality as the USERVAR= option in the REGRESSION statement. For more information about specifying user-defined regression variables, see the section “User-Defined Regression Variables” on page 2725, [Example 37.6](#), and [Example 37.11](#).

The following *options* can appear in the INPUT statement:

B=(*value* < **F** > ...)

specifies initial or fixed values for the regression parameters in the order in which they appear in *variables*. Each B= list applies to the variable list that immediately precedes the slash.

For example, the following statements set an initial value of 1 for the user-defined regressor, x:

```
input y ;
input x / b=1 2 ;
```

In this example, the B= option applies only to the second INPUT statement. The value 2 is discarded because there is only one variable in the variable list.

To assign an initial value of 1 to the y regressor and 2 to the x regressor, use the following statements:

```
input y / b=1;
input x / b=2 ;
```

An **F** immediately following the numerical value indicates that this is not an initial value, but a fixed value. See [Example 37.8](#) for an example that uses fixed parameters. In PROC X12, individual parameters can be fixed while other parameters in the same model are estimated.

USERTYPE=(values)

enables a user-defined variable to be processed in the same manner as a U.S. Census predefined variable. You can specify the following *values*: AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For example, the U.S. Census Bureau EASTER(*w*) regression effects are included the “RegARIMA Holiday Component” table (A7). Specify USERTYPE=EASTER to include a user-defined variable that is processed exactly as the U.S. Census predefined EASTER(*w*) variable, including inclusion in the A7 table. The NOAPPLY= option in the REGRESSION statement also changes the processing of variables based on the USERTYPE= value. Table 37.4 shows the regression types that are associated with each regression effects table.

Each USERTYPE= list applies to the variable list that immediately precedes the slash. The same rules for assigning B= values to regression variables apply for USERTYPE= options. For example, the following statements specify that the user-defined regressor in the variable MyEaster be processed exactly as the U.S. Census predefined LOM variable:

```
input MyLOM;
input MyEaster / usertype=LOM EASTER;
```

In this example, the USERTYPE= option applies only to the MyEaster variable in the second INPUT statement. The USERTYPE value EASTER is discarded because there is only one variable in the variable list.

To assign the USERTYPE value LOM to the MyLOM variable and EASTER to the MyEaster variable, use the following statements:

```
input MyLOM / usertype=LOM;
input MyEaster / usertype=EASTER;
```

The following USERTYPE= options specify that the regression effect be removed from the seasonally adjusted series: EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, SCEASTER, SEASONAL, TD, TDSTOCK, THANKS, and USER. When a regression effect is removed from the seasonally adjusted series, the level (mean) of the seasonally adjusted series can be altered. It is often desirable to use a zero-mean (mean-adjusted) regressor for effects that are to be removed from the seasonally adjusted series. See Example 37.6 for an example that specifies a zero-mean regressor.

OUTLIER Statement

OUTLIER options ;

The OUTLIER statement specifies that the X12 procedure perform automatic detection of additive point outliers, temporary change outliers, level-shifts, or any combination of the three when using the specified model. After outliers are identified, the appropriate regression variables are incorporated into the model as “Automatically Identified Outliers,” and the model is reestimated. This procedure is repeated until no additional outliers are found.

The OUTLIER statement also identifies potential outliers and lists them in the “Potential Outliers” table in the displayed output. Potential outliers are identified by decreasing the critical value by the value that is specified in the ALMOST= option.

In the output, the initial critical values used for outlier detection in a given analysis are displayed in the table “Critical Values to Use in Outlier Detection.” Outliers that are detected and incorporated into the model are displayed in the output in the table “Regression Model Parameter Estimates,” where the regression variable is listed as “Automatically Identified.”

You can specify the following *options*:

ALMOST=value

specifies the difference between the critical value for an automatically identified outlier and a potential outlier that is “almost” identified. *value* is subtracted from the critical value that is used to identify outliers to form a critical value that more aggressively identifies potential outliers. Potential outliers are not included in the regARIMA model. However, potential outliers are displayed in the “Potential Outliers” table. *value* must be greater than 0. By default, ALMOST=0.5.

ALPHA=value

specifies the significance level to use for outlier identification, where critical values are calculated based on *value*. Any critical value that is specified in the **CV=**, **AOCV=**, **LSCV=**, or **TCCV=** option overrides the critical values that are calculated based on this option. *value* must be greater than 0 and less than or equal to 0.1. If you do not specify this option or the CV= option, the X-12-ARIMA method calculates the default initial critical value by assuming ALPHA=0.05.

AOCV=value

specifies a critical value to use for additive point outliers. If you specify this option, it overrides any default initial critical value for AO outliers. For more information, see the **CV= option**.

CV=value

specifies a default initial critical value to use for detecting all types of outliers. The absolute value of the *t* statistic that is associated with an outlier parameter estimate is compared with *value* to determine the significance of the outlier. If you do not specify this option, then the default initial critical value is computed based on the **ALPHA=** option, the **CVMETHOD=** option, and the number of observations for the model span that is used in the analysis. Table 37.2 shows initial critical values for various series lengths, which are based on the default values of the ALPHA= option and CVMETHOD= option. Increasing the critical value decreases the sensitivity of the outlier detection routine and can reduce the number of observations that are treated as outliers. The automatic model identification process might decrease the critical value by a certain percentage if the automatic model identification process fails to identify an acceptable model.

Table 37.2 Default Critical Values for Outlier Identification

Number of Observations	Outlier Critical Value
1	1.96
2	2.24
3	2.44
4	2.62
5	2.74
6	2.84
7	2.92
8	2.99
9	3.04
10	3.09

Table 37.2 *continued*

Number of Observations	Outlier Critical Value
11	3.13
12	3.16
24	3.42
36	3.55
48	3.63
72	3.73
96	3.80
120	3.85
144	3.89
168	3.92
192	3.95
216	3.97
240	3.99
264	4.01
288	4.03
312	4.04
336	4.05
360	4.07

CVMETHOD=CORRECTED | LJUNG

specifies the method to use to calculate the default initial critical value, based on the [ALPHA=](#) value and the number of observations for the model span that is used in the analysis. You can specify the following values:

CORRECTED	uses a method that is a modification of the Ljung method in which critical values are interpolated based on the number of observations in the model span.
LJUNG	uses a method that is based on the asymptotic formula described in Ljung (1993).

By default, CVMETHOD=CORRECTED.

LSCV=value

specifies a critical value to use for level-shift outliers. If you specify this option, it overrides any default initial critical value for LS outliers. For more information, see the [CV= option](#).

LSRUN=value

specifies the maximum number of successive level-shift outliers to combine to form a temporary level-shift. Valid *values* for this option are 0 to 5, inclusive. If LSRUN=0 or LSRUN=1, no temporary level-shifts are evaluated. The evaluation of the temporary level-shifts is displayed in the “Tests for Cancellation of Level Shifts” table. By default, LSRUN=0.

METHOD=ADDALL | ADDONE

specifies whether to add outliers one at a time for each model estimation iteration or to add all outliers at once for each model estimation iteration. You can specify the following values:

ADDALL	includes all significant outliers as regressors in the model, and then reestimates the model.
ADDONE	adds the most significant outlier as a regressor in the model, and then reestimates the model.

For both methods, all candidate points for outliers are evaluated at each iteration and model estimation iterations continue until no remaining outliers are identified. By default, METHOD=ADDONE.

SPAN=(*mmmyy* ,*mmmyy*)

SPAN=(*'yyQq'* ,*'yyQq'*)

specifies the dates of the first and last observations to define a subset for searching for outliers. A single date in parentheses is interpreted to be the starting date of the subset. To specify only the ending date, use SPAN=(*mmmyy*) or SPAN=(*'yyQq'*). If the starting or ending date is omitted, then the first or last date, respectively, of the input data set or BY group is assumed. Because the dates are input as strings and the quarterly dates begin with a numeric character, the specification for a quarterly date must be enclosed in quotation marks. A four-digit year can be specified. If a two-digit year is specified, the value specified in the YEARCUTOFF= SAS system option applies.

TCCV=*value*

specifies a critical value to use for temporary change (TC) outliers. If you specify this option, it overrides any default initial critical value for TC outliers. For more information, see the [CV= option](#).

TCRATE=*value*

specifies the rate of decay for temporary change outliers. *value* must be greater than 0 and less than 1. The default value is $(0.7)^{\frac{12}{period}}$, where *period* is the number of observations in one year.

TYPE=NONE

TYPE=(*outlier types*)

lists the outlier types to be detected by the automatic outlier identification method. TYPE=NONE turns off outlier detection. The valid outlier types are AO, LS, and TC. The default is TYPE=(AO LS).

OUTPUT Statement

OUTPUT OUT= *SAS-data-set* < **YEARSEAS** > *tablename1 tablename2 ...* ;

The OUTPUT statement creates an output data set that contains specified tables. The data set is named by the OUT= option.

OUT=*SAS-data-set*

names the data set to contain the specified tables. If the OUT= option is omitted, the data set is named using the default DATA n convention.

YEARSEAS

YRSEAS

specifies that two additional variables be added to the OUT= data set. The two additional variables are the variables _YEAR_ and _SEASON_. The variable _YEAR_ contains the year of the date identifying the observation. The variable _SEASON_ contains the month for monthly data, or quarter for quarterly data, of the date that identifies the observation. For monthly data, the value of _SEASON_ is between 1

and 12. For quarterly data, the value of `_SEASON_` is between 1 and 4. The `_YEAR_` and `_SEASON_` variables are useful when creating seasonal plots.

tablename1 tablename2 ...

For each table to be included in the output data set, you must specify the X12 *tablename* keyword. The keyword corresponds to the title label used by the U.S. Census Bureau X-12-ARIMA software. Currently available tables are A1, A2, A6, A7, A8, A8AO, A8LS, A8TC, A9, A10, A19, B1, C17, C20, D1, D7, D8, D9, D10, D10B, D10D, D11, D11A, D11F, D11R, D12, D13, D16, D16B, D18, E1, E2, E3, E5, E6, E6A, E6R, E7, E8, and MV1. If no table is specified in the OUTPUT statement, Table A1 is output to the OUT= data set by default.

The *tablename* keywords that can be used in the OUTPUT statement are listed in the section “[Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords](#)” on page 2729. The following is an example of a VAR statement and an OUTPUT statement:

```
var sales costs;
output out=out_x12 b1 d11;
```

The default variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name. The variable `sales_B1` contains the Table B1 values for the variable `sales`, the variable `costs_B1` contains the Table B1 values for the variable `costs`, the variable `sales_D11` contains the Table D11 values for the variable `sales`, and the variable `costs_D11` contains the Table D11 values for the variable `costs`. If necessary, the variable name is shortened so that the table name can be added. If the `DATE=` variable is specified in the PROC X12 statement, then that variable is included in the output data set; otherwise, a variable named `_DATE_` is written to the OUT= data set as the date identifier.

PICKMDL Statement

PICKMDL *options* ;

The PICKMDL statement uses models specified in the `MDLINFOIN=` data set to choose a regARIMA model. The `MDLINFOIN=` data set can include a variable that identifies different models. All observations with the same value for the model identification variable are considered to be relevant to the same model. A single model can be considered to consist of all the observations for a BY group that consists of the BY variables (if any), the `_NAME_` variable if it exists, and the `MDLVAR=` variable. The default variable name that identifies the model is `_MODEL_`. [Example 37.9](#) demonstrates the use of the PICKMDL statement.

For more information about using the U.S. Census Bureau’s PICKMDL method for model selection, see the section “[PICKMDL Model Selection](#)” on page 2728 .

You can specify the following *options* in the PICKMDL statement:

MDLVAR=*variable*

specifies the variable in the `MDLINFOIN=` data set that identifies the models.

METHOD= BEST | FIRST

specifies the method for choosing the regARIMA model. If you specify `METHOD=BEST`, the best model is chosen. If you specify `METHOD=FIRST`, the first acceptable model is chosen.

REGRESSION Statement

REGRESSION *regression-group-options* ;

REGRESSION PREDEFINED= *variables* < / **B=**(*value* < **F** > ...) > ;

REGRESSION USERVER= *variables* < / **B=**(*value* < **F** > ...) **USERTYPE=**(*values*) > ;

The REGRESSION statement includes regression variables in a regARIMA model or specifies regression variables whose effects are to be removed by the IDENTIFY statement to aid in ARIMA model identification. Include the **PREDEFINED=** option to select predefined regression variables. Include the **USERVAR=** option to specify user-defined regression variables.

Table 37.3 shows the X-12-ARIMA tables that contain regression factors. Tables A8AO, A8LS, and A8TC are available only when more than one outlier type is present in the model.

Table 37.3 X-12-ARIMA Regression Effects Tables

Table	Regression Effects
A6	Trading day effects
A7	Holiday effects including Easter, Labor Day, and Thanksgiving-Christmas
A8	Combined effects of outliers, level-shifts, ramps, and temporary changes
A8AO	Point outlier effects; available only when more than one outlier type is present in the model
A8LS	Level-shift and ramp effects; available only when more than one outlier type is present in the model
A8TC	Temporary change effects; available only when more than one outlier type is present in the model
A9	User-defined regression effects
A10	User-defined seasonal component effects

Missing values in the span of an input series automatically create missing value regressors. See the **NOTRIMMISS** option in the PROC X12 statement and the section “Missing Values” on page 2720 for further details about missing values.

Combining your model with additional predefined regression variables can result in a singularity problem. To successfully perform the regression if a singularity occurs, you might need to alter either the model or the choices of the regressors.

To seasonally adjust a series that uses a regARIMA model, the factors derived from regression are used as multiplicative or additive factors, depending on the mode of seasonal decomposition. Therefore, regressors that are appropriate to the mode of the seasonal decomposition should be defined, so that meaningful combined adjustment factors can be derived and adjustment diagnostics can be generated. For example, if a regARIMA model is applied to a log-transformed series, then the regression factors are expressed as ratios, which match the form of the seasonal factors that are generated by the multiplicative or log-additive adjustment modes. Conversely, if a regARIMA model is fit to the original series, then the regression factors are measured on the same scale as the original series, which matches the scale of the seasonal factors that are generated by the additive adjustment mode. Note that the default transformation (no transformation) and the default seasonal adjustment mode (multiplicative) are in conflict. Thus, when you specify the X11 statement and any of the REGRESSION, INPUT, or EVENT statements, you must also either use the **TRANSFORM** statement to specify a transformation or use the **MODE=** option in the X11 statement to specify a different mode to seasonally adjust the data that uses the regARIMA model.

According to Ladiray and Quenneville (2001), “X-12-ARIMA is based on the same principle [as the X-11 method] but proposes, in addition, a complete module, called Reg-ARIMA, that allows for the initial series to be corrected for all sorts of undesirable effects. These effects are estimated using regression models with ARIMA errors (Findley et al. [23]).” The REGRESSION, INPUT, and EVENT statements specify these regression effects. Predefined effects that can be corrected in this manner are listed in the **PREDEFINED=** option. You can create your own definitions to remove other effects by using the **USERVAR=** option and the **EVENT** statement.

You can specify either the **PREDEFINED=** option or the **USERVAR=** option, but not both, in a single REGRESSION statement. You can use multiple REGRESSION statements.

You can specify the following *regression-group-options* in the REGRESSION statement. The *regression-group-options* apply to all regression variables in a regression group. For predefined regression variables, the regression group is predefined. For user-defined regression variables, you can specify the regression group in the **USERTYPE=** option.

AICTEST=(EASTER | TD | TD1COEF | TD1NOLPYEAR | TDNOLPYEAR | TDSTOCK | USER)

specifies that an AIC-based selection be used to determine whether a given set of regression variables are to be included with the specified regARIMA model. For example, if you specify a trading day model selection, then AIC values (with a correction for the length of the series, henceforth referred to as AICC) are derived for models with and without the specified trading day variable. By default, the model with a smaller AICC is used to generate forecasts, identify outliers, and so on. If you specify more than one type of regressor, the AIC tests are performed sequentially in this order: (a) trading day regressors, (b) Easter regressors, (c) user-defined regressors. If there are several variables of the same type (for example, several trading day regressors), then AIC-based selection is applied to them as a group. That is, either all variables of this type or none are included in the final model. If you do not specify this option, no automatic AIC-based selection is performed.

If you use the **AUTOMDL** statement to identify the model and you also specify this option, then this option affects the model selection process in the following manner:

- AIC-based selection tests are performed on the default model.
- A new series is created by removing the regression effects that are identified in the default model from the original series. The automatic model identification process attempts to identify a model that is based on the new series.
- After a model is automatically identified, AIC-based selection tests that use the automatically identified model are performed on the original series.
- The default model, including regressors that are identified by using AIC-based selection, is compared to the automatically identified model, which also might include regressors that are identified by using AIC-based selections. The regressors for the two models can differ.

For more information about the X-12-ARIMA automatic modeling method, see section 7.2 of the *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c).

NOAPPLY=(AO | HOLIDAY | LS | TC | TD | USER | USERSEASONAL)

specifies a list of the types of regression effects whose model-estimated values are not to be removed from the original series before performing the seasonal adjustment calculations that are specified by the X11 statement. The **NOAPPLY=** option applies to the regression component values displayed in the X11 seasonal adjustment method regARIMA component tables as shown in [Table 37.4](#).

Table 37.4 NOAPPLY= Types and Regression Effects

NOAPPLY= Option	Regression Effects Table	Description
AO	A8AO	Point outliers
HOLIDAY	A7	Easter, Labor Day, and Thanksgiving-to-Christmas holiday effects
LS	A8LS	Level changes and ramps
TC	A8TC	Temporary changes
TD	A6	Trading day effects
USER	A9	User-defined regression effects
USERSEASONAL	A10	User-defined seasonal regression effects

You can specify the following regression variable specification options in the REGRESSION statement.

PREDEFINED=CONSTANT | EASTER(*value*) | LABOR(*value*) | LOM | LOMSTOCK | LOQ | LPYEAR

PREDEFINED=SCEASTER(*value*) | SEASONAL | SINCOS(*value* ...) | TD | TD1COEF

PREDEFINED=TD1NOLPYEAR | TDNOLPYEAR | TDSTOCK(*value*) | THANK(*value*)

lists the predefined regression variables to be included in the model. Data values for these variables are calculated by the program, mostly as functions of the calendar. [Table 37.5](#) gives definitions for the available predefined variables. The values LOM and LOQ are equivalent: the actual regression is controlled by the SEASONS= option in the PROC X12 statement. You can specify multiple predefined regression variables. The syntax for using both a length-of-month and a seasonal regression can be in one of the following forms:

```
regression predefined=lom seasonal;
```

```
regression predefined=(lom seasonal);
```

```
regression predefined=lom predefined=seasonal;
```

The following restrictions apply when you use more than one predefined regression variable:

- You can specify only one of TD, TDNOLPYEAR, TD1COEF, or TD1NOLPYEAR.
- You cannot specify LPYEAR with TD, TD1COEF, LOM, LOMSTOCK, or LOQ.
- You cannot specify LOM or LOQ with TD or TD1COEF.
- If you specify the SINCOS predefined regression variable, then you must also specify the INTERVAL= option or the SEASONS= option in the PROC X12 statement because there are restrictions on this regression variable that are based on the frequency of the data.

The predefined regression variables, EASTER, LABOR, SCEASTER, SINCOS, TDSTOCK, and THANK, require extra parameters. Only one TDSTOCK regressor can be implemented in the regression model. If you specify multiple TDSTOCK variables, PROC X12 uses the last TDSTOCK variable specified. For EASTER, LABOR, SCEASTER, SINCOS, and THANK, you can specify the variables with different parameters to implement multiple regressors in the model. For example, the following statement specifies two EASTER regressors with widths 7 and 14:

```
regression predefined=easter(7) easter(14);
```

For SINCOS, specifying a parameter includes both the sine and the cosine regressor except for the highest order allowed (2 for quarterly data and 6 for monthly data.) For quarterly data, the following statement is the most common use of the SINCOS variable; it includes three regressors in the model:

```
regression predefined=sincos(1,2);
```

For monthly data, the following statement is the most common use of the SINCOS variable; it includes 11 regressors in the model:

```
regression predefined=sincos(1,2,3,4,5,6);
```

Table 37.5 Predefined Regression Variables in X-12-ARIMA

Regression Effect	Variable Definitions
Trend constant CONSTANT	$(1 - B)^{-d}(1 - B^s)^{-D}I(t \geq 1)$ where $I(t \geq 1) = \begin{cases} 1 & \text{for } t \geq 1 \\ 0 & \text{for } t < 1 \end{cases}$
Easter holiday EASTER(<i>w</i>)	$E(w, t) = \frac{1}{w} \times n_t$ and n_t is the number of the w days before Easter that fall in month (or quarter) t . (Note: This variable is 0 except in February, March, and April (or first and second quarter). It is nonzero in February only for $w > 22$.) Restriction: $1 \leq w \leq 25$.
Labor Day LABOR(<i>w</i>)	$L(w, t) = \frac{1}{w} \times [\text{no. of the } w \text{ days before Labor Day that fall in month } t]$ (Note: This variable is 0 except in August and September.) Restriction: $1 \leq w \leq 25$.

Table 37.5 *continued*

Regression Effect	Variable Definitions
Length-of-month (monthly flow) LOM	$m_t - \bar{m}$ where m_t = length of month t (in days) and $\bar{m} = 30.4375$ (average length of month)
Stock length-of-month LOMSTOCK	$SLOM_t = \begin{cases} m_t - \bar{m} - \mu(l) & \text{for } t = 1 \\ SLOM_{t-1} + m_t - \bar{m} & \text{otherwise} \end{cases}$ where \bar{m} and m_t are defined in LOM and $\mu(l) = \begin{cases} 0.375 & \text{when first February in series is a leap year} \\ 0.125 & \text{when second February in series is a leap year} \\ -0.125 & \text{when third February in series is a leap year} \\ -0.375 & \text{when fourth February in series is a leap year} \end{cases}$
Length-of-quarter (quarterly flow) LOQ	$q_t - \bar{q}$ where q_t = length of quarter t (in days) and $\bar{q} = 91.3125$ (average length of quarter)
Leap year (monthly and quarterly flow) LPYEAR	$LY_t = \begin{cases} 0.75 & \text{in leap year February (first quarter)} \\ -0.25 & \text{in other Februaries (first quarter)} \\ 0 & \text{otherwise} \end{cases}$
Statistics Canada Easter (monthly or quarterly flow) SCEASTER(w)	If Easter falls before April w , let n_E be the number of the w days on or before Easter that fall in March. Then: $E(w, t) = \begin{cases} n_E/w & \text{in March} \\ -n_E/w & \text{in April} \\ 0 & \text{otherwise} \end{cases}$ If Easter falls on or after April w , then $E(w, t) = 0$. (Note: This variable is 0 except in March and April (or first and second quarter).) Restriction: $1 \leq w \leq 24$.
Fixed seasonal SEASONAL	$M_{1,t} = \begin{cases} 1 & \text{in January} \\ -1 & \text{in December} \\ 0 & \text{otherwise} \end{cases}$ $, \dots, M_{11,t} = \begin{cases} 1 & \text{in November} \\ -1 & \text{in December} \\ 0 & \text{otherwise} \end{cases}$

Table 37.5 *continued*

Regression Effect	Variable Definitions
Fixed seasonal SINCOS(j) SINCOS(j_1, \dots, j_n)	$\sin(w_j t), \cos(w_j t)$, where $w_j = 2\pi j/s$, $1 \leq j \leq s/2$, and s is the seasonal period (drop $\sin(w_j t) \equiv 0$ for $j = s/2$) Restrictions: $1 \leq j_i \leq s/2$, $1 \leq n \leq s/2$.
Trading day TD, TDNOLPYEAR	$T_{1,t} = (\text{number of Mondays}) - (\text{number of Sundays})$ $\dots, T_{6,t} = (\text{number of Saturdays}) - (\text{number of Sundays})$
One coefficient trading day TD1COEF, TD1NOLPYEAR	$(\text{number of weekdays}) - \frac{5}{2}(\text{number of Saturdays and Sundays})$
Stock trading day TDSTOCK(w)	$D_{1,t} = \begin{cases} 1 & \tilde{w}\text{th day of month } t \text{ is a Monday} \\ -1 & \tilde{w}\text{th day of month } t \text{ is a Sunday} \\ 0 & \text{otherwise} \end{cases}$ $\dots, D_{6,t} = \begin{cases} 1 & \tilde{w}\text{th day of month } t \text{ is a Saturday} \\ -1 & \tilde{w}\text{th day of month } t \text{ is a Sunday} \\ 0 & \text{otherwise} \end{cases}$ <p>where \tilde{w} is the smaller of w and the length of month t. For end-of-month stock series, set w to 31; that is, specify TDSTOCK(31). Restriction: $1 \leq w \leq 31$.</p>
Thanksgiving THANK(w)	$\text{ThC}(w, t) = \text{proportion of days from } w \text{ days before Thanksgiving}$ through December 24 that fall in month t (negative values of w indicate days after Thanksgiving). (Note: This variable is 0 except in November and December.) Restriction: $-8 \leq w \leq 17$.

USERVAR=(variables)

specifies variables in the DATA= or AUXDATA= data set (which are specified in the PROC X12 statement) that are to be used as regressors. The variables in the data set should contain the values for each observation that define the regressor. Regression variables should also include future values in the data set for the forecast horizon if the time series is to be extended with regARIMA forecasts. Regression variables should include past values if the time series is to be extended with regARIMA backcasts. Missing values are not permitted within the data span, including backcasts and forecasts, of the user-defined regressors. [Example 37.6](#) shows how to create an input data set that contains both the series to be seasonally adjusted and a user-defined input variable. [Example 37.11](#) shows how to create an auxiliary data set that contains a user-defined input variable. For more information about specifying user-defined regression variables see the section “[User-Defined Regression Variables](#)” on page 2725.

All regression variables in the USERVAR= option apply to all time series to be seasonally adjusted unless the MDLINFOIN= data set specifies different regression information. You cannot specify the PREDEFINED= option and the USERVAR= option in the same REGRESSION statement; however, you can specify multiple REGRESSION statements.

You can specify the following *options* for individual regression variables. Individual regression variable options are specified in the PREDEFINED= and USERVAR= options after the slash. The B= option can be specified in both the PREDEFINED= and USERVAR= options. Because the regression group is predefined for predefined variables, you can specify the USERTYPE= option only in the USERVAR= option.

B=(value <F> ...)

specifies initial or fixed values for the regression parameters in the order in which they appear in a PREDEFINED= or USERVAR= option. Each B= list applies to the PREDEFINED= or USERVAR= variable list that immediately precedes the slash.

For example, the following statements set an initial value of 1 for the user-defined regressor, x:

```
regression predefined=LOM ;
regression uservar=x / b=1 2 ;
```

In this example, the B= option applies only to the USERVAR= option. The value 2 is discarded because there is only one variable in the USERVAR= list.

To assign an initial value of 1 to the LOM regressor and 2 to the x regressor, use the following statements:

```
regression predefined=LOM / b=1;
regression uservar=x / b=2 ;
```

An F immediately following the numerical value indicates that this is not an initial value, but a fixed value. See [Example 37.8](#) for an example that uses fixed parameters. In PROC X12, individual parameters can be fixed while other parameters in the same model are estimated.

USERTYPE=(values)

enables a variable that you define to be processed in the same manner as a U.S. Census predefined variable. You can specify the following *values*: AO, CONSTANT, EASTER, HOLIDAY, LABOR, LOM, LOMSTOCK, LOQ, LPYEAR, LS, RP, SCEASTER, SEASONAL, TC, TD, TDSTOCK, THANKS, or USER. For example, the U.S. Census Bureau EASTER(*w*) regression effects are included the “RegARIMA Holiday Component” table (A7). Specify USERTYPE=EASTER to define a variable that is processed exactly as the U.S. Census predefined EASTER(*w*) variable, including inclusion in the A7 table. Each USERTYPE= list applies to the USERVAR= variable list that immediately precedes the slash. USERTYPE= does not apply to U.S. Census predefined variables.

The same rules for assigning B= values to regression variables apply for USERTYPE= options. For example, the following statements specify that the user-defined regressor in the variable MyEaster be processed exactly as the U.S. Census predefined LOM variable:

```
regression uservar=MyLOM;
regression uservar=MyEaster / usertype=LOM EASTER;
```

In this example, the `USERTYPE=` option applies only to the `MyEaster` variable in the second `REGRESSION` statement. The `USERTYPE` value `EASTER` is discarded because there is only one variable in the `USERVAR=` list.

To assign the `USERTYPE` value `LOM` to the `MyLOM` variable and `EASTER` to the `MyEaster` variable, use the following statements:

```
regression uservar=MyLOM / usertype=LOM;
regression uservar=MyEaster / usertype=EASTER;
```

The following `USERTYPE=` options specify that the regression effect be removed from the seasonally adjusted series: `EASTER`, `HOLIDAY`, `LABOR`, `LOM`, `LOMSTOCK`, `LOQ`, `LPYEAR`, `SCEASTER`, `SEASONAL`, `TD`, `TDSTOCK`, `THANKS`, and `USER`. When a regression effect is removed from the seasonally adjusted series, the level (mean) of the seasonally adjusted series can be altered. It is often desirable to use a zero-mean (mean-adjusted) regressor for effects that are to be removed from the seasonally adjusted series. See [Example 37.6](#) for an example that specifies a zero-mean regressor.

SEATSDECOMP Statement

SEATSDECOMP OUT= *SAS-data-set* *< options >* ;

The `SEATSDECOMP` statement creates an output data set (named by the `OUT=` option) that contains the SEATS decomposition series.

The following is an example of a `VAR` statement and a `SEATSDECOMP` statement:

```
var sales costs;
seatsdecomp out=SEATS_DECOMP;
```

The default variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name. Because the `B1` series is used as the original input series for the SEATS decomposition, the output data set `SEATS_DECOMP` from the example will contain the seasonal decomposition variables in the following order:

<code>sales_OS</code>	contains the Table B1 values for the variable <code>sales</code> .
<code>sales_SC</code>	contains the SEATS decomposition seasonal component for the variable <code>sales</code> .
<code>sales_TC</code>	contains the SEATS trend component values for the variable <code>sales</code> .
<code>sales_SA</code>	contains the SEATS seasonally adjusted series for the variable <code>sales</code> .
<code>sales_IC</code>	contains the SEATS irregular component for the variable <code>sales</code> .
<code>costs_OS</code>	contains the Table B1 values for the variable <code>costs</code> .
<code>costs_SC</code>	contains the SEATS decomposition seasonal component for the variable <code>costs</code> .
<code>costs_TC</code>	contains the SEATS trend component values for the variable <code>costs</code> .
<code>costs_SA</code>	contains the SEATS seasonally adjusted series for the variable <code>costs</code> .
<code>costs_IC</code>	contains the SEATS irregular component for the variable <code>costs</code> .

If necessary, the variable name is shortened so that the component name can be added. If you specify the `DATE=` variable in the PROC X12 statement, then that variable is included in the output data set; otherwise, a variable named `_DATE_` is written to the `OUT=` data set as the date identifier. For further information about the output data set, see [SEATSDECOMP OUT= Data Set](#).

You can specify the following *options* in the SEATSDECOMP statement:

LEAD=*value*

specifies the number of periods ahead to forecast for a regARIMA extension of the series. The default is twice the number of periods in a year (8 or 24), and the maximum is 120. In the SEATS computations, the number of backcasts and forecasts are the same, and the minimum number is also dependent on the ARIMA model orders. For more information, see the section “[SEATS Decomposition](#)” on page 2729. If you specify a `LEAD=` value that is less than the default, then the number of forecasts specified in the `LEAD=` option are displayed in the `OUT=` data set. If the value of the `LEAD=` option and `NBACKCAST=` options in the FORECAST statement are less than the required number for SEATS decomposition, then the values of the `LEAD=` and `NBACKCAST=` options in the FORECAST statement are increased.

NBACKCAST=*value*

BACKCAST=*value*

NBACK=*value*

specifies the number of periods to backcast for a regARIMA extension of the series. The default is twice the number of periods in a year (8 or 24), and the maximum is 120. In the SEATS computations, the number of backcasts and forecasts are the same, and the minimum number is also dependent on the ARIMA model orders. For more information, see the section “[SEATS Decomposition](#)” on page 2729. If you specify a `NBACKCAST=` value that is less than the default, then the number of backcasts specified in the `NBACKCAST=` option are displayed in the `OUT=` data set. If the value of the `LEAD=` option and `NBACKCAST=` option specified in the FORECAST statement are less than the required number for SEATS decomposition when SEATSDECOMP is specified, then the value of `LEAD=` and `NBACKCAST=` in the FORECAST statement will be increased.

OUT=*SAS-data-set*

names the data set to contain the SEATS decomposition series: original series, seasonal component, trend component, seasonally adjusted series, irregular component. If the `OUT=` option is omitted, the data set is named using the default `DATAn` convention.

YEARSEAS

YRSEAS

specifies that two additional variables be added to the `OUT=` data set: `_YEAR_` and `_SEASON_`. The variable `_YEAR_` contains the year of the date that identifies the observation. The variable `_SEASON_` contains the month for monthly data, or quarter for quarterly data, of the date that identifies the observation. For monthly data, the value of `_SEASON_` is between 1 and 12. For quarterly data, the value of `_SEASON_` is between 1 and 4. The `_YEAR_` and `_SEASON_` variables are useful when you create seasonal plots.

TABLES Statement

TABLES *tablename1 tablename2 ... options ;*

The TABLES statement enables you to alter the display of the PROC X12 tables. You can specify the display of tables that are not displayed by default by PROC X12, and the NOSUM option enables you to suppress the printing of the period summary line in the time series tables.

tablename1 tablename2 ...

are keywords that correspond to the title label used by the U.S. Census Bureau X-12-ARIMA software. For each table to be included in the displayed output, you must specify the X12 *tablename* keyword. Currently available tables are A19, C20, D1, D7, E1, E2, and E3. Although these tables are not displayed by default, their values are sometimes useful in understanding the X-12-ARIMA method. For further description of the available tables, see the section “[Displayed Output, ODS Table Names, and OUTPUT Table Name Keywords](#)” on page 2729.

NOSUM

NOSUMMARY

NOSUMMARYLINE

applies to the tables available for output in the [OUTPUT Statement](#). By default, these tables include a summary line that gives the average, total, or standard deviation for the historical data by period. The NOSUM option suppresses the display of the summary line in the listing. Also, if the tables are output with ODS, the summary line is not an observation in the data set. Thus, the output to the data set is only the time series, both the historical data and the forecast data, if available.

TRANSFORM Statement

TRANSFORM *options ;*

The TRANSFORM statement transforms or adjusts the series prior to estimating a regARIMA model. With this statement, the series can be Box-Cox (power) transformed. The “Prior Adjustment Factors” table is associated with the TRANSFORM statement.

Only one of the following *options* can appear in the TRANSFORM statement:

POWER=*value*

transforms the input series, Y_t , by using a Box-Cox power transformation,

$$Y_t \rightarrow y_t = \begin{cases} \log(Y_t) & \lambda = 0 \\ \lambda^2 + (Y_t^\lambda - 1)/\lambda & \lambda \neq 0 \end{cases}$$

The power λ must be specified (for example, POWER=0.33). The default is no transformation ($\lambda = 1$); that is, POWER=1. The log transformation (POWER=0), square root transformation (POWER=0.5), and the inverse transformation (POWER=-1) are equivalent to the corresponding FUNCTION= option.

Table 37.6 Power Values Related to the Census Bureau Function Argument

FUNCTION=	Transformation	Range for Y_t	Equivalent Power Argument
NONE	Y_t	All values	POWER=1
LOG	$\log(Y_t)$	$Y_t > 0$ for all t	POWER=0
SQRT	$2(\sqrt{Y_t} - 0.875)$	$Y_t \geq 0$ for all t	POWER=0.5
INVERSE	$2 - \frac{1}{Y_t}$	$Y_t \neq 0$ for all t	POWER=-1
LOGISTIC	$\log(\frac{Y_t}{1-Y_t})$	$0 < Y_t < 1$ for all t	No equivalent

FUNCTION=NONE | LOG | SQRT | INVERSE | LOGISTIC | AUTO

specifies the transformation to be applied to the series prior to estimating a regARIMA model. The transformation used by FUNCTION=NONE, LOG, SQRT, INVERSE, or LOGISTIC is related to the POWER= option as shown in Table 37.6. FUNCTION=AUTO uses selection based on Akaike's information criterion (AIC) to decide between a log transformation and no transformation. The default is FUNCTION=NONE.

However, the FUNCTION= and POWER= options are not completely equivalent. In some cases, using the FUNCTION= option causes the program to automatically select other options. For example, FUNCTION=NONE causes the default mode to be MODE=ADD in the X11 statement. Also, the choice of transformation invoked by the FUNCTION=AUTO option can impact the default mode of the X11 statement.

There are restrictions on the value used in the POWER= and FUNCTION= options when preadjustment factors for seasonal adjustment are generated from a regARIMA model. When seasonal adjustment is requested with the X11 statement, any value of the POWER option can be used for the purpose of forecasting the series with a regARIMA model. However, this is not the case when factors generated from the regression coefficients are used to adjust either the original series or the final seasonally adjusted series. In this case, the only accepted transformations are the log transformation, which can be specified as POWER=0 for multiplicative or log-additive seasonal adjustments, and no transformation, which can be specified as POWER=1 for additive seasonal adjustments. If no seasonal adjustment is performed, any POWER transformation can be used. The preceding restrictions also apply when FUNCTION=NONE and FUNCTION=LOG are specified.

USERDEFINED Statement

USERDEFINED *variables* ;

The USERDEFINED statement is used to identify the variables in the input data set or auxiliary data set that are available for user-defined regression. Only numeric variables can be specified. Specifying variables in the USERDEFINED statement does not include the variables as regressors. If a variable is specified in the INPUT statement or USERVAR= option in the REGRESSION statement, it is not necessary to include that variable in the USERDEFINED statement. However, if a variable is specified in the MDLINFOIN= data set in the PROC X12 statement and is not specified in an INPUT statement or in the USERVAR= option in the REGRESSION statement, then the variable should be specified in the USERDEFINED statement in order to make the variable available for regression.

VAR Statement

VAR *variables* ;

The VAR statement specifies the variables in the input data set that are to be analyzed by the procedure. Only numeric variables can be specified. If the VAR statement is omitted, all numeric variables are analyzed except those that appear in a BY statement, ID statement, INPUT statement, USERDEFINED statement, in the USERVAR= option in the REGRESSION statement, or the variable named in the DATE= option in the PROC X12 statement.

X11 Statement

X11 *options* ;

The X11 statement is an optional statement for invoking seasonal adjustment by an enhanced version of the methodology of the U.S. Census Bureau X-11 and X-11Q programs. You can control the type of seasonal adjustment decomposition calculated with the MODE= option. The output includes the final tables and diagnostics for the X-11 seasonal adjustment method listed in [Table 37.7](#). Tables E1, E2, E3, C20, D1, and D7 are not displayed by default; however, you can display these tables by requesting them in the [TABLES statement](#).

Table 37.7 Tables Related to X11 Seasonal Adjustment

Table Name	Description
B1	Original series, adjusted for prior effects and forecast extended
C17	Final weights for the irregular component
C20	Final extreme value adjustment factors
D1	Modified original data, D iteration
D7	Preliminary trend cycle, D iteration
D8	Final unmodified SI ratios (differences)
D8A	<i>F</i> tests for stable and moving seasonality, D8
D9	Final replacement values for extreme SI ratios (differences), D iteration
D9A	Moving seasonality ratios for each period
SeasonalFilter	Seasonal filter statistics for Table D10
D10	Final seasonal factors
D10B	Seasonal factors, adjusted for user-defined seasonal
D10D	Final seasonal difference
D11	Final seasonally adjusted series
D11A	Final seasonally adjusted series with forced yearly totals
D11R	Rounded final seasonally adjusted series (with forced yearly totals)
TrendFilter	Trend filter statistics for Table D12
D12	Final trend cycle
D13	Final irregular component
D16	Combined seasonal and trading day factors
D16B	Final adjustment differences
D18	Combined calendar adjustment factors
E1	Original data modified for extremes
E2	Modified seasonally adjusted series
E3	Modified irregular series
E4	Ratio of yearly totals of original and seasonally adjusted series
E5	Percent changes (differences) in original series
E6	Percent changes (differences) in seasonally adjusted series
E6A	Percent changes (differences) in seasonally adjusted series with forced yearly totals (D11.A)
E6R	Percent changes (differences) in rounded seasonally adjusted series (D11.R)
E7	Percent changes (differences) in final trend component series
E8	Percent changes (differences) in original series adjusted for calendar factors (A18)
F2A–F2I	X11 diagnostic summary
F3	Monitoring and quality assessment statistics
F4	Day of the week trading day component factors
G	Spectral plots

For more details about the X-11 seasonal adjustment diagnostics, see Shiskin, Young, and Musgrave (1967), Lothian and Morry (1978a), and Ladiray and Quenneville (2001).

The following *options* can appear in the X11 statement:

FINAL=AO | LS | TC | USER | ALL**FINAL=(options)**

lists the types of prior adjustment factors, obtained from the EVENT, REGRESSION, and OUTLIER statements, that are to be removed from the final seasonally adjusted series. Additive outliers are removed by specifying FINAL=AO. Level change and ramp outliers are removed by specifying FINAL=LS. Temporary change outliers are removed by specifying FINAL=TC. User-defined regressors or events (USERTYPE=USER) are removed by specifying FINAL=USER. All the preceding are removed by specifying FINAL=ALL or by specifying all the options in parentheses, FINAL=(AO LS TC USER). If this option is not specified, the final seasonally adjusted series contains these effects.

FORCE=TOTALS | ROUND | BOTH

specifies that the seasonally adjusted series be modified to: (a) force the yearly totals of the seasonally adjusted series and the original series to be the same (FORCE=TOTALS), (b) adjust the seasonally adjusted values for each calendar year so that the sum of the rounded seasonally adjusted series for any year equals the rounded annual total (FORCE=ROUND), or (c) first force the yearly totals, then round the adjusted series (FORCE=BOTH). When FORCE=TOTALS is specified, the differences between the annual totals is distributed over the seasonally adjusted values in a way that approximately preserves the month-to-month (or quarter-to-quarter) movements of the original series. For more details, see Huot (1975) and Cholette (1979). This forcing procedure is not recommended if the seasonal pattern is changing or if trading day adjustment is performed. Forcing the seasonally adjusted totals to be the same as the original series annual totals can degrade the quality of the seasonal adjustment, especially when the seasonal pattern is undergoing change. It is not natural if trading day adjustment is performed because the aggregate trading day effect over a year is variable and moderately different from zero.

MODE=ADD | MULT | LOGADD | PSEUDOADD

determines the mode of the seasonal adjustment decomposition to be performed. The four option choices correspond to additive, multiplicative, log-additive, and pseudo-additive decomposition, respectively. If this option is omitted, the procedure performs multiplicative adjustments. Table 37.8 shows the values of the MODE= option and the corresponding models for the original (O) and the seasonally adjusted (SA) series.

Table 37.8 Modes of Seasonal Adjustment and Their Models

Value of Mode Option	Name	Model for <i>O</i>	Model for <i>SA</i>
MULT	Multiplicative	$O = C \times S \times I$	$SA = C \times I$
ADD	Additive	$O = C + S + I$	$SA = C + I$
PSEUDOADD	Pseudo-additive	$O = C \times [S + I - 1]$	$SA = C \times I$
LOGADD	Log-additive	$\log(O) = C + S + I$	$SA = \exp(C + I)$

OUTFORECAST**OUTFCST**

determines whether forecasts are included in certain tables sent to the output data set. If OUTFORECAST is specified, then forecast values are included in the output data set for tables A6, A7, A8, A9, A10, B1, D10, D10B, D10D, D16, D16B, and D18. The default is not to include forecasts. The OUTFORECAST option can be specified in either the X11 statement or the FORECAST statement with identical results.

SEASONALMA=S3X1 | S3X3 | S3X5 | S3X9 | S3X15 | STABLE | X11DEFAULT | MSR

SEASONALMA=(filter-list-by-period)

specifies which seasonal moving average (also called “seasonal filter”) to use to estimate the seasonal factors. These seasonal moving averages are $n \times m$ moving averages, meaning that an n -term simple average is taken of a sequence of consecutive m -term simple averages. X11DEFAULT is the method used by the U.S. Census Bureau’s X-11-ARIMA program.

You can specify either a single filter option or a list. A single option indicates that all periods will use the same filter or the same method of identifying the filter. Alternately, you can specify the seasonal filters for each seasonal period by specifying SEASONALMA=(filter-list-by-period), where (filter-list-by-period) lists the moving average filter for each period. For quarterly data, you must specify four filters; for monthly data, you must specify 12 filters. In the filter-list-by-period, you can specify S3X1, S3X3, S3X5, S3X9, or S3X15. For example, the following statement assigns a 3×1 moving average filter to the first quarter of a quarterly series and a 3×3 moving average to the second, third, and fourth quarters:

```
X11 SEASONALMA= ( S3X1 S3X3 S3X3 S3X3 );
```

Table 37.9 describes the seasonal filter options available for the entire series:

Table 37.9 X-12-ARIMA Seasonal Filter Options and Descriptions

Filter Name	Description of Filter
S3X1	A 3×1 moving average
S3X3	A 3×3 moving average
S3X5	A 3×5 moving average
S3X9	A 3×9 moving average
S3X15	A 3×15 moving average
STABLE	Stable seasonal filter: a single seasonal factor for each calendar month or quarter is generated by calculating the simple average of all the values for each month or quarter (taken after detrending and outlier adjustment)
X11DEFAULT	Uses a 3×3 moving average to calculate the initial seasonal factors in each iteration and a 3×5 moving average to calculate the final seasonal factors
MSR	Filter chosen automatically by using the moving seasonality ratio of X-11-ARIMA/88 (Dagum 1988)

By default, SEASONALMA=MSR, which is the methodology of Statistic Canada’s X-11-ARIMA/88 program.

SIGMALIM=(lower limit, upper limit)

SIGMALIM=(lower limit)

SIGMALIM=(, upper limit)

specifies the lower and upper sigma limits in standard deviation units which are used to identify and down-weight extreme irregular values in the internal seasonal adjustment computations. One or both limits can be specified. The lower limit must be greater than 0 and not greater than the upper limit. If

the lower sigma limit is not specified, then it defaults to a value of 1.5. The default upper sigma limit is 2.5. The comma must be used if the upper limit is specified.

Table 37.10 shows the effect of the SIGMALIM= option on the weights that are applied to the internal irregular values.

Table 37.10 Weights for Irregular Values

Weight	Sigma Limit
0	If $\frac{ I_t - \mu }{\sigma_{1,I_t}} \geq \text{upper limit}$
Partial weight	If $\text{lower limit} < \frac{ I_t - \mu }{\sigma_{2,I_t}} < \text{upper limit}$
1	If $\frac{ I_t - \mu }{\sigma_{2,I_t}} \leq \text{lower limit}$

In Table 37.10, μ is the theoretical mean of the irregular component, and σ_{1,I_t} and σ_{2,I_t} are the respective estimates of the standard deviation of the irregular component before and after extreme values are removed. The estimates of the standard deviation σ_{1,I_t} and σ_{2,I_t} vary with respect to t , and they are the same if no extreme values are removed. If they are different ($\sigma_{2,I_t} < \sigma_{1,I_t}$), then the first line in Table 37.10 is reevaluated with σ_{2,I_t} . In the special case where the lower limit equals the upper limit, the weight is 1 for $\frac{|I_t - \mu|}{\sigma_{2,I_t}} \leq \text{lower limit}$, and 0 otherwise. For more information about how extreme irregular values are handled in the X11 computations, see Ladiray and Quenneville 2001, pp. 53–68, 122–125.

TRENDMA=value

specifies which Henderson moving average is used to estimate the final trend cycle. Any odd number greater than one and less than or equal to 101 can be specified (for example, TRENDMA=23). If the TRENDMA= option is not specified, the program selects a trend moving average based on statistical characteristics of the data. For monthly series, a 9-, 13-, or 23-term Henderson moving average is selected. For quarterly series, the program chooses either a 5- or a 7-term Henderson moving average.

TYPE=SA | SUMMARY | TREND

specifies the method used to calculate the final seasonally adjusted series (Table D11). The default method is TYPE=SA. This method assumes that the original series has not been seasonally adjusted. For method TYPE=SUMMARY, the trend cycle, irregular, trading day, and holiday factors are calculated, but not removed from the seasonally adjusted series. Thus, for TYPE=SUMMARY, Table D11 is the same as the original series. For TYPE=TREND, trading day, holiday, and prior adjustment factors are removed from the original series to calculate the seasonally adjusted series (Table D11) and also are used in the calculation of the final trend (Table D12).

Details: X12 Procedure

Data Requirements

The input data set must contain either quarterly or monthly time series, and the data must be sorted in chronological order within each BY group. For the standard X-12-ARIMA method, there must be at least three years of observations (12 for quarterly time series or 36 for monthly).

If an ARIMA model is specified in the ARIMA statement, AUTOMDL statement, PICKMDL statement, or the MDLINFOIN= data set, then more than three years of observations might be required in order to fit the ARIMA model and perform the computations associated with the seasonal decomposition and other diagnostics.

The minimum number of observations applies to each series listed in the VAR statement and within each BY group and is determined after any missing values are trimmed from the series.

Missing Values

PROC X12 can process a series with missing values.

Types of Missing Values

Missing values in a series are considered to be one of two types:

- A leading or trailing missing value occurs before the first nonmissing value or after the last nonmissing value, respectively, in the span of a series. The span of a series can be determined either explicitly by the SPAN= option or implicitly by the START= or DATE= option in the PROC X12 statement. By default, leading and trailing missing values are ignored. If you specify the **NOTRIMMISS** option in the PROC X12 statement, PROC X12 processes leading and trailing missing values according to the X-12-ARIMA missing value method.
- An embedded missing value occurs between the first nonmissing value and the last nonmissing value in the span of the series. PROC X12 processes embedded missing values according to the X-12-ARIMA missing value method.

X-12-ARIMA Missing Value Method

When the X-12-ARIMA method encounters a missing value, it inserts an additive outlier for the missing observation into the set of regression variables for the model of the series and then replaces the missing observation with a value large enough to be considered an outlier during model estimation. After the regARIMA model is estimated, the X-12-ARIMA method adjusts the original series by using factors that are generated from these missing value outlier regressors. The adjusted values are estimates of the missing values, and the adjusted series is displayed in Table MV1. The X-12-ARIMA missing value method requires the use of a regARIMA model to replace the missing values. Thus, either an ARIMA or AUTOMDL statement or the MDLINFOIN= option in the PROC X12 statement must be specified if there are embedded missing values in the time series.

SAS Predefined Events

SAS predefined events are summarized in this section. For complete details about SAS predefined events, see the section “EVENTKEY Statement” in Chapter 9, “The HPFEVENTS Procedure” (*SAS High-Performance Forecasting User’s Guide*).

Table 37.11 shows a summary of the SAS predefined event keywords. Table 37.12 lists the holiday date keywords that can be used as SAS predefined events. Table 37.13 lists the seasonal date keywords that can be used as SAS predefined events.

Table 37.11 Definitions for EVENTKEY Predefined Event Keywords

Variable Name or Variable Name Format	Description	Qualifier Options
AO<obs>OBS AO<date>D AO<datetime>DT	Outlier	TYPE=POINT VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0)
LS<obs>OBS LS<date>D LS<datetime>DT	Level-shift	TYPE=LS VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
TLS<obs>OBS<n> TLS<date>D<n> TLS<datetime>DT<n>	Temporary level-shift	TYPE=LS VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=<n>)
NLS<obs>OBS NLS<date>D NLS<datetime>DT	Negative level-shift	TYPE=LS VALUE=-1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
CBLS<obs>OBS CBLS<date>D CBLS<datetime>DT	U.S. Census Bureau level-shift	TYPE=LS VALUE=-1 SHIFT=-1 BEFORE=(DURATION=ALL) AFTER=(DURATION=0)
TC<obs>OBS TC<date>D TC<datetime>DT	Temporary change	TYPE=TC VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL)
<date keyword>	Date pulse	TYPE=POINT VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0) PULSE=DAY
LINEAR QUAD	Polynomial trends	TYPE=LIN TYPE=QUAD

Table 37.11 *continued*

Variable Name or Variable Name Format	Description	Qualifier Options
CUBIC		TYPE=CUBIC VALUE=1 BEFORE=(DURATION=ALL) AFTER=(DURATION=ALL) The default timing value is the 0 observation.
INVERSE LOG	Trends	TYPE=INV TYPE=LOG VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=ALL) The default timing value is the 0 observation.
<seasonal keywords>	Seasonal	TYPE=POINT PULSE= depends on keyword VALUE=1 BEFORE=(DURATION=0) AFTER=(DURATION=0) Timing values are based on keyword.

Table 37.12 Holiday Date Keywords and Definitions

Date Keyword	Definition
BOXING	December 26th
CANADA	July 1st
CANADAOBSERVED	July 1st, or July 2nd if July 1st is a Sunday
CHRISTMAS	December 25th
COLUMBUS	Second Monday in October
EASTER	Easter Sunday
FATHERS	Third Sunday in June
HALLOWEEN	October 31st
LABOR	First Monday in September
MLK	Third Monday in January
MEMORIAL	Last Monday in May
MOTHERS	Second Sunday in May
NEWYEAR	January 1st
THANKSGIVING	Fourth Thursday in November
THANKSGIVINGCANADA	Second Monday in October
USINDEPENDENCE	July 4th
USPRESIDENTS	Third Monday in February (since 1971)
VALENTINES	February 14th
VETERANS	November 11th
VETERANSUSG	Veterans Day date that is observed by U.S. government for Monday–Friday schedule
VETERANSUSPS	Veterans Day date that is observed by U.S. government for Monday–Saturday schedule (U.S. Post Office)
VICTORIA	Monday on or preceding May 24th

Table 37.13 Seasonal Date Keywords and Definitions

Date Keyword	Definition
SECOND_1, ..., SECOND_60	Specified second
MINUTE_1, ..., MINUTE_60	Beginning of the specified minute
HOUR_1, ..., HOUR_24	Beginning of the specified hour
SUNDAY, ..., SATURDAY	All Sundays, and so on, in the time series
WEEK_1, ..., WEEK_53	First day of the n th week of the year (PULSE=WEEK. n shifts this date for $n \neq 1$)
TENDAY_1, TENDAY_4, ..., TENDAY_34	The first day of the month
TENDAY_2, TENDAY_5, ..., TENDAY_35	The 11th day of the month
TENDAY_3, TENDAY_6, ..., TENDAY_36	The 21st day of the month
SEMIMONTH_1, SEMIMONTH_3, ..., SEMIMONTH_23	The first day of the month
SEMIMONTH_2, SEMIMONTH_4, ..., SEMIMONTH_24	The 16th day of the month
JANUARY, ..., DECEMBER	The first day of the specified month
QTR_1, QTR_2, QTR_3, QTR_4	The first date of the quarter indicated after the underscore (PULSE=QTR. n shifts this date for $n \neq 1$)
SEMIYEAR_1, SEMIYEAR_2	The first date of the semiyear (PULSE=SEMIYEAR. n shifts this date for $n \neq 1$)

User-Defined Regression Variables

The X-12-ARIMA method enables you to define regression variables to be included in the regARIMA model. A user-defined regression variable is composed of a value at each time series observation that you provide; the entire variable is implemented as a regressor in the regARIMA model. The regARIMA model is used in the seasonal decomposition process to extend the series prior to X11 decomposition. Because the X-12-ARIMA method does not impute, forecast, nor backcast user-defined regression variables, you must provide a nonmissing value at each observation in the span of the time series to be modeled and also provide a nonmissing value at each observation to be forecast or backcast.

A user-defined regression variable can be included in either the PROC X12 **DATA=** or **AUXDATA=** data set. You can supply the values for the user-defined regression variable by one of the following methods:

- You can include them in an auxiliary data set. The auxiliary data set should have a date variable that corresponds to the date variable in the **DATA=** data set. The name of the auxiliary data set is specified in the **AUXDATA=** option in the PROC X12 statement. The name of the date variable that exists in both the **DATA=** and **AUXDATA=** data sets is specified in the **DATE=** option in the PROC X12 statement. The observations in the auxiliary data set must span the entire series plus any forecast and backcast period.
- You can include them in the **DATA=** data set. Because the number of observations and the date values are exactly the same for both user-defined regressors and time series values, you need to include forecast and backcast values for user-defined regression variables beyond the span of the time series in one of the following ways:
 - You must specify leading missing values in the series to be seasonally adjusted for backcast periods. You must specify trailing missing values in the series to be seasonally adjusted for forecast periods. You must not use the **NOTRIMMISS** option in this case. The span of the series to be seasonally adjusted that is implied by trimming the leading and trailing missing values will be less than the span of the date values in the **DATA=** data set. Using this method, forecast error cannot be computed for the forecast and backcast periods.
 - You can use the **SPAN=** option in the PROC X12 statement to alter the span of the series to be seasonally adjusted to allow for backcast and forecast periods within the span of the date values in the **DATA=** data set. Using this method, forecast error can be computed for the forecast and backcast periods.

These methods of including user-defined regression variables in the regARMIA model are illustrated in [Example 37.6](#) and [Example 37.11](#).

If missing values for the user-defined regression variable are present within the span of the the time series, including backcast and forecast observations, then an error message is displayed and the time series is not processed. If the span of the user-defined regression variable, or the span after leading and trailing missing values are trimmed, is not sufficient to cover the span of the series to be seasonally adjusted, including any backcasts and forecasts, then an error message is also displayed, and the time series is not processed.

Combined Test for the Presence of Identifiable Seasonality

The seasonal component of a time series, S_t , is defined as the intrayear variation that is repeated constantly (stable) or in an evolving fashion from year to year (moving seasonality). If the increase in the seasonal factors from year to year is too large, then the seasonal factors introduce distortion into the model. It is important to determine whether seasonality is identifiable without distorting the series.

For seasonality to be identifiable, the series should be identified as seasonal by using the “Test for the Presence of Seasonality Assuming Stability” and “Nonparametric Test for the Presence of Seasonality Assuming Stability.” Also, since the presence of moving seasonality can cause distortion, it is important to evaluate the moving seasonality in conjunction with the stable seasonality to determine whether the seasonality is identifiable. The results of these tests are displayed in “ F tests for Seasonality” (Table D8.A) in the X12 procedure.

The test for identifiable seasonality is performed by combining the F tests for stable and moving seasonality, along with a Kruskal-Wallis test for stable seasonality. The following description is based on Lothian and Morry (1978b). Other details can be found in Dagum (1988, 1983).

Let F_s and F_m denote the F value for the stable and moving seasonality tests, respectively. The combined test is performed as follows (see also Figure 37.3):

1. If the null hypothesis of no stable seasonality is not rejected at the 0.10% significance level ($P_S \geq 0.001$), then the series is considered to be nonseasonal. PROC X12 returns the conclusion, “Identifiable Seasonality Not Present.”
2. If the null hypothesis in step 1 is rejected, then PROC X12 computes the following quantities:

$$T_1 = \frac{7}{F_s}$$

$$T_2 = \frac{3F_m}{F_s}$$

Let T denote the simple average of T_1 and T_2 :

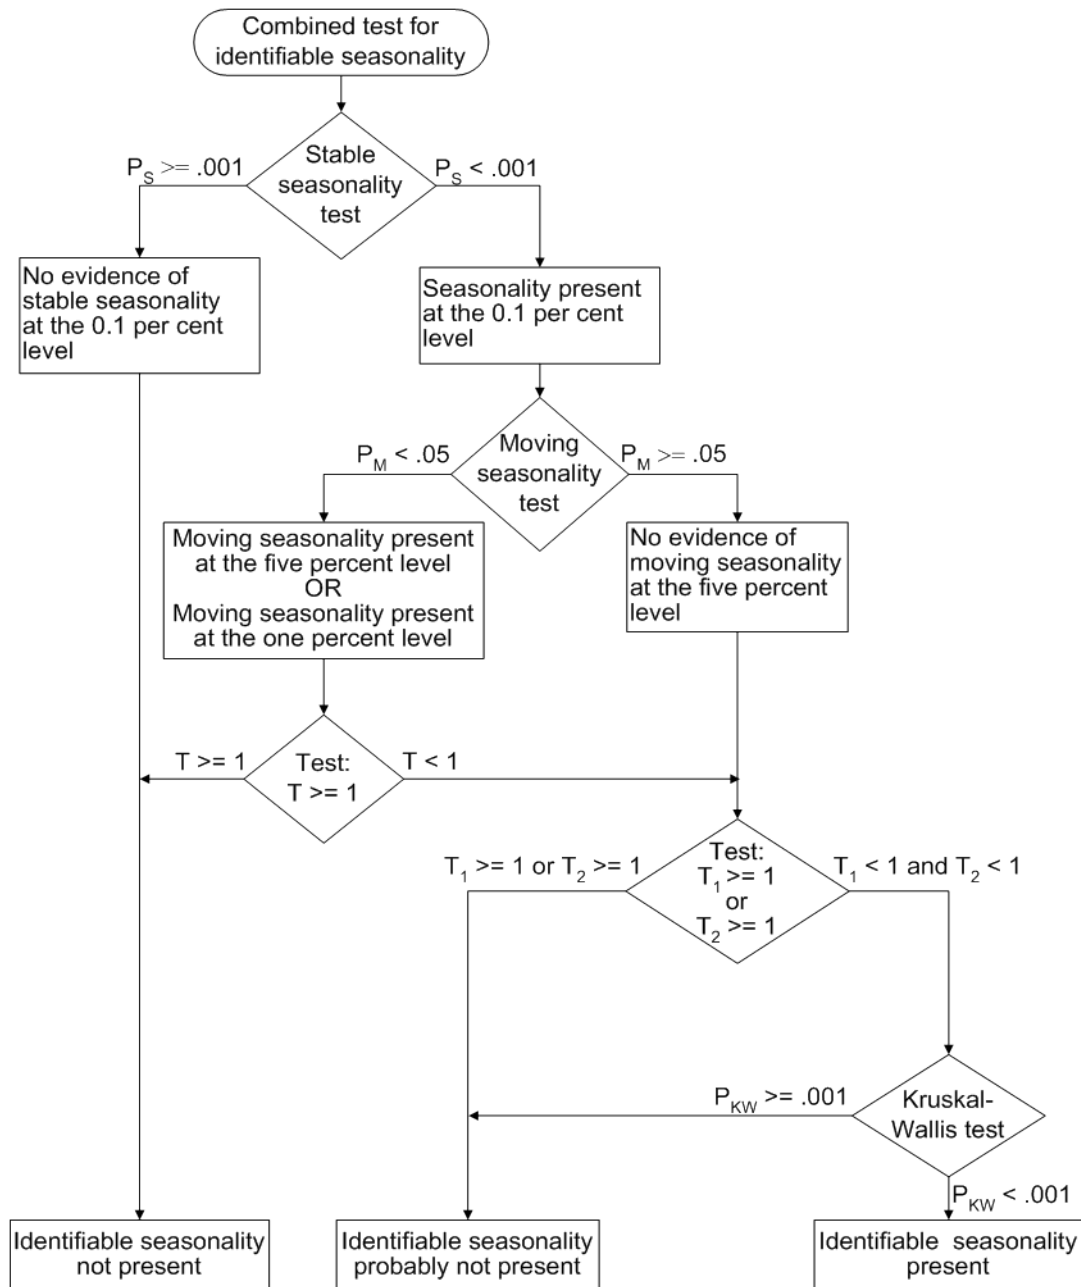
$$T = \frac{(T_1 + T_2)}{2}$$

If the null hypothesis of no moving seasonality is rejected at the 5.0% significance level ($P_M < 0.05$) and if $T \geq 1.0$, the null hypothesis of identifiable seasonality *not* present is not rejected and PROC X12 returns the conclusion, “Identifiable Seasonality Not Present.”

3. If the null hypothesis of identifiable seasonality *not* present has not been accepted, but $T_1 \geq 1.0$, $T_2 \geq 1.0$, or the Kruskal-Wallis chi-squared test fails to reject at the 0.10% significance level ($P_{KW} \geq 0.001$), then PROC X12 returns the conclusion “Identifiable Seasonality Probably Not Present.”
4. If the null hypotheses of no stable seasonality associated with the F_S and Kruskal-Wallis chi-squared tests are rejected and if none of the combined measures described in steps 2 and 3 fail, then the null hypothesis of identifiable seasonality *not* present is rejected and PROC X12 returns the conclusion “Identifiable Seasonality Present.”

Included in the displayed output of Table D8A is the table “Summary of Results and Combined Test for the Presence of Identifiable Seasonality.” This table displays the T_1 , T_2 , and T values and the significance levels for the stable seasonality test, the moving seasonality test, and the Kruskal-Wallis test. The last item in the table is the result of the combined test for identifiable seasonality.

Figure 37.3 Combined Seasonality Test Flowchart



Computations

For more details about the computations used in PROC X12, see the *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c).

For more details about the X-11 method of decomposition, see *Seasonal Adjustment with the X-11 Method* (Ladiray and Quenneville 2001).

PICKMDL Model Selection

You can request that the X-12-ARIMA method select a model in a manner similar to the method used in X-11-ARIMA (Dagum 1988, 1983) by specifying the **PICKMDL** statement. Information about this model selection (PICKMDL) is based on the description in the *X-12-ARIMA Reference Manual* (U.S. Bureau of the Census 2009c).

The default settings for the **PICKMDL** automatic model selection method classify a model as acceptable if all of the following conditions are true:

- The absolute average percentage error of the extrapolated values within the last three years of data is less than 15%.
- The p -value is greater than 5% for the fitted model's Ljung-Box Q statistic test of the lack of correlation in the model's residuals.
- There are no signs of overdifferencing. Overdifferencing is indicated if the sum of the nonseasonal MA parameter estimates (for models with at least one nonseasonal difference) is greater than 0.9.

No model is selected when none of the models in the **MDLINFOIN=** data set is acceptable.

The regARIMA model consists of a transformation, a regression component, and an ARIMA model component. For each series, the following conditions hold:

- If no regression is specified in the **MDLINFOIN=** data set model but regressors are specified using the **INPUT**, **EVENT**, or **REGRESSION** statements, then the ARIMA models from the **MDLINFOIN=** data set are tested in conjunction with the regression variables specified by the **INPUT**, **EVENT**, and **REGRESSION** statements.
- If no ARIMA model is specified in the **MDLINFOIN=** data set but an ARIMA model is specified using an **ARIMA** statement or **TRANSFORM** statement, then the regression information from each model specified in the **MDLINFOIN=** data set is used in conjunction with the ARIMA model specified by the **TRANSFORM** and **ARIMA** statements.
- If no model information is specified in the **MDLINFOIN=** data set, then any model information specified by the **TRANSFORM**, **INPUT**, **REGRESSION**, **EVENT**, and **ARIMA** statements is used, and the **PICKMDL** statement is not in effect for that series.

SEATS Decomposition

PROC X12 can decompose the B1 series by using the SEATS decomposition method described in Gómez and Maravall (1997a, b). The SEATS decomposition method is planned for inclusion in the U.S. Census Bureau's X13 program, which is not yet available for release.

The SEATS method requires the series to be extended with the same number of backcast and forecast observations. The number of observations backcast and forecast must meet the following minimum criteria:

- The number of forecast and backcast observations must be at least twice the number of observations in a year, with a minimum of 8.
- The number of forecast and backcast observations must be at least $2 \times (q + Q * s)$, where the ARIMA model used to extend the series is $(pdq)(PDQ)s$ in standard Box-Jenkins notation.
- The number of forecast and backcast observations must be at least $p + d + q + (P + D + Q) * s$, where the ARIMA model used to extend the series is $(pdq)(PDQ)s$ in standard Box-Jenkins notation.

If you specify the SEATSDECOMP statement and the number of forecasts or backcasts (either the default number or the number you specify) is not sufficient for SEATS decomposition, then the number of forecasts or backcasts is increased to the minimum required.

Displayed Output, ODS Table Names, and OUTPUT Tablename Keywords

The options specified in PROC X12 control both the tables produced by the procedure and the tables available for output to the OUT= data set specified in the OUTPUT statement.

The displayed output is organized into tables identified by a part letter and a sequence number within the part. The seven major parts of the X12 procedure are as follows:

- A prior adjustments and regARIMA components (optional)
- B preliminary estimates of irregular component weights and trading day regression factors (X-11 method)
- C final estimates of irregular component weights and trading day regression factors
- D final estimates of seasonal, trend cycle, and irregular components
- E analytical tables
- F summary measures
- G charts

Table 37.14 describes the individual tables and charts. “P” indicates that the table is only displayed and is not available for output to the OUT= data set. Data from displayed tables can be extracted into data sets by using the Output Delivery System (ODS). For more information about the SAS Output Delivery System, see the *SAS Output Delivery System: User's Guide*. For more information about the features of the ODS Graphics system, including the many ways that you can control or customize the plots that are produced by SAS procedures, see Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User's Guide*).

When tables available through the **OUTPUT statement** are output using ODS, the summary line is included in the ODS output by default. The summary line gives the average, standard deviation, or total by each period. The value -1 for YEAR indicates that the summary line is a total; the value -2 for YEAR indicates that the summary line is an average; and the value -3 for YEAR indicates that the line is a standard deviation. The value of YEAR for historical and forecast values is greater than or equal to zero. Thus, a negative value indicates a summary line. You can suppress the summary line altogether by specifying the **NOSUM** option in the **TABLES** statement. However, the **NOSUM** option also suppresses the display of the summary line in the displayed table.

“T” indicates that the table is available using the **OUTPUT** statement, but is not displayed by default; you must request that these tables be displayed by using the **TABLES Statement**. If there is no notation in the “Notes” column, then the table is available directly using the **OUTPUT** statement, without specifying the **TABLES** statement. If a table is not computed, then it is not displayed; if it is requested in the **OUTPUT** statement, then the variable in the **OUT=** data set contains missing values. The actual number of tables displayed depends on the options and statements specified.

Table 37.14 Table Names and Descriptions

Table	Description	Notes
Tables Associated with Model Order Identification		
ModelDescription	Regression model used in ARIMA model identification	P
ACF	Autocorrelation function	P
PACF	Partial autocorrelation function	P
Tables Associated with Automatic Modeling		
UnitRootTestModel	ARIMA estimates for unit root identification	P
UnitRootTest	Results of unit root test for identifying orders of differencing	P
AutoChoiceModel	Models estimated by automatic ARIMA model selection procedure	P
Best5Model	Best five ARIMA models chosen by automatic modeling	P
AutomaticModelChoice	Comparison of automatically selected model and default model	P
FinalModelChoice	Final automatic model choice	P
Diagnostic Tables		
ErrorACF	Autocorrelation of regARIMA model residuals	P
ErrorPACF	Partial autocorrelation of regARIMA model residuals	P
SqErrorACF	Autocorrelation of squared regARIMA model residuals	P
ResidualOutliers	Outliers of the unstandardized residuals	P
ResidualStatistics	Summary statistics for the unstandardized residuals	P
NormalityStatistics	Normality statistics for regARIMA model residuals	P
G	Spectral analysis of regARIMA model residuals	P
Modeling Tables		
MissingExtreme	Extreme or missing values	P

Table 37.14 *continued*

Table	Description	Notes
ARMAIterationTolerances	Exact ARMA likelihood estimation iteration tolerances	P
IterHistory	ARMA iteration history	P
OutlierDetection	Critical values to use in outlier detection	P
PotentialOutliers	Potential outliers	P
TLSTest	Tests for cancellation of level-shifts	P
ARMAIterationSummary	Exact ARMA likelihood estimation iteration summary	P
ModelDescription	Model description for regARIMA model estimation	P
RegParameterEstimates	Regression model parameter estimates	P
RegressorGroupChiSq	Chi-squared tests for groups of regressors	P
ARMAParameterEstimates	Exact ARMA maximum likelihood estimation	P
AvgFcstErr	Average absolute percentage error in within-sample or without-sample forecasts or backcasts	P
Roots	Seasonal or nonseasonal AR or MA roots	P
MLESummary	Estimation summary	P
ForecastCL	Forecasts, standard errors, and confidence limits	P
MV1	Original series adjusted for missing value regressors	
Sequenced Tables		
A1	Original series	
A2	Prior-adjustment factors	
A6	RegARIMA trading day component	
A7	RegARIMA holiday component	
A8	RegARIMA combined outlier component	
A8AO	RegARIMA AO outlier component	
A8LS	RegARIMA level change outlier component	
A8TC	RegARIMA temporary change outlier component	
A9	RegARIMA user-defined regression component	
A10	RegARIMA user-defined seasonal component	
A19	RegARIMA outlier adjusted original data	T
B1	Prior-adjusted or original series	
C17	Final weight for irregular components	
C20	Final extreme value adjustment factors	T
D1	Modified original data, D iteration	T
D7	Preliminary trend cycle, D iteration	T
D8	Final unmodified S-I ratios	
D8A	Seasonality tests	P
D9	Final replacement values for extreme S-I ratios	
D9A	Moving seasonality ratio	P
SeasonalFilter	Seasonal filter statistics for table D10	P
D10	Final seasonal factors	
D10B	Seasonal factors, adjusted for user-defined seasonal	
D10D	Final seasonal difference	
D11	Final seasonally adjusted series	
D11A	Final seasonally adjusted series with forced yearly totals	

Table 37.14 *continued*

Table	Description	Notes
D11F	Factors applied to get adjusted series with forced yearly totals	
D11R	Rounded final seasonally adjusted series (with forced yearly totals)	
TrendFilter	Trend filter statistics for table D12	P
D12	Final trend cycle	
D13	Final irregular series	
D16	Combined adjustment factors	
D16B	Final adjustment differences	
D18	Combined calendar adjustment factors	
E1	Original data modified for extremes	
E2	Modified seasonally adjusted series	
E3	Modified irregular series	
E4	Ratios of annual totals	P
E5	Percent changes in original series	
E6	Percent changes in final seasonally adjusted series	
E6A	Percent changes (differences) in seasonally adjusted series with forced yearly totals (D11.A)	
E6R	Percent changes (differences) in rounded seasonally adjusted series (D11.R)	
E7	Differences in final trend cycle	
E8	Percent changes (differences) in original series adjusted for calendar factors (A18)	
F2A-I	Summary measures	P
F3	Quality assessment statistics	P
F4	Day of the week trading day component factors	P
G	Spectral analysis	P

Using Auxiliary Variables to Subset Output Data Sets

The X12 procedure can produce more than one table with the same name. For example, the following **IDENTIFY** statement produces ACF and PACF tables for two levels of differencing:

```
identify diff=(1) sdiff=(0, 1);
```

Auxiliary variables in the output data can be used to subset the data. In this example, the auxiliary variables **Diff** and **SDiff** specify the levels of regular and seasonal differencing that are used to compute the ACF. The following statements show how to retrieve the ACF results for the first differenced series:


```
ods select acf;
ods output acf=acf;
proc x12 data=sashelp.air date=date;
    identify diff=(1) sdiff=(0,1);
run;
title "Regular Difference=1 Seasonal Difference=0";
data acfd1D0;
    set acf(where=(Diff=1 and Sdiff=0));
run;
```

In addition to any BY variables, the auxiliary variables in the ACF and PACF data sets are `_NAME_`, `_TYPE_`, Transform, Adjust, Regressors, Diff and SDiff. Auxiliary variables can be related to the group as shown in the Results Viewer (for example, BY variables, `_NAME_`, and `_TYPE_`). However, they can also be variables in the template where printing is suppressed by using `PRINT=OFF`. Auxiliary variables such as Transform, Adjust, and Regressors are not displayed in the ACF and PACF tables because similar information is displayed in the ModelDescription table that immediately precedes the ACF and PACF tables. The variables Diff and SDiff are not displayed because the levels of differencing are included in the title of the ACF and PACF tables.

The BY variables and the `_NAME_` variable are available for all ODS OUTPUT data sets that are produced by the X12 procedure. The `_TYPE_` variable is available for all ODS OUTPUT data sets that are produced during the model identification and model estimation stages. The `_TYPE_` variable enables you to determine whether data in a table, such as the ModelDescription table, originated from the model identification stage or the model estimation stage.

The forecast data sets contain the auxiliary variable `_SCALE_`. The value of `_SCALE_` is “Original” or “Transformed” to indicate the scale of the data. The auxiliary variable `_SCALE_` is the same as the group in the Results Viewer. It is not displayed in the forecast tables because the table titles indicate the scale of the data.

ODS Graphics

Statistical procedures use ODS Graphics to create graphs as part of their output. ODS Graphics is described in detail in Chapter 21, “Statistical Graphics Using ODS” (*SAS/STAT User’s Guide*).

Before you create graphs, ODS Graphics must be enabled (for example, with the `ODS GRAPHICS ON` statement). For more information about enabling and disabling ODS Graphics, see the section “Enabling and Disabling ODS Graphics” in that chapter.

The overall appearance of graphs is controlled by ODS styles. Styles and other aspects of using ODS Graphics are discussed in the section “A Primer on ODS Statistical Graphics” in that chapter.

This section describes the use of ODS for creating graphics with the X12 procedure.

The graphs available through ODS Graphics are ACF plots, PACF plots, a residual histogram, spectral graphs, and forecasting plots. ACF and PACF plots for regARIMA model identification are not available unless the **IDENTIFY** statement is used. ACF plots, PACF plots, the residual histogram, and the residual spectral graph for diagnosis of the regARIMA model residuals are not available unless the **CHECK** statement is used. Forecasting plots are not available unless the **FORECAST** statement is used. A spectral plot of the original series is always available; however, additional spectral plots are provided when the **X11** statement

and CHECK statement are used. When ODS Graphics is not enabled, the ACF, PACF, and spectral analysis are displayed as columns of a table. The residual histogram is available only when ODS Graphics is enabled. To obtain a table that contains values related to the residual histogram, use the ODS OUTPUT statement.

ODS Graph Names

PROC X12 assigns a name to each graph it creates by using ODS. You can use these names to selectively reference the graphs. The names are listed in Table 37.15.

Table 37.15 ODS Graphs Produced by PROC X12

ODS Graph Name	Plot Description	PROC X12 PLOTS= Option
ACFPlot	Autocorrelation of regression residuals	SERIES(ACF)
ErrorACFPlot	Autocorrelation of regARIMA model residuals	RESIDUAL(ACF)
ErrorPACFPlot	Partial autocorrelation of regARIMA model residuals	RESIDUAL(PACF)
ForecastsOnlyPlot	Forecasts only of the original series	FORECAST(FORECASTONLY)
ForecastsOnlyPlot	Forecasts only of the transformed series	FORECAST(TRANSFORECASTONLY)
ForecastsPlot	Forecasts of the original series	FORECAST(FORECAST)
ForecastsPlot	Forecasts of the transformed series	FORECAST(TRANSFORECAST)
ModelForecastsPlot	Model and forecasts of the original series	FORECAST(MODELFORECASTS)
ModelForecastsPlot	Model and forecasts of the transformed series	FORECAST(TRANSMODELFORECASTS)
ModelPlot	Model of the original series	FORECAST(MODELS)
ModelPlot	Model of the transformed series	FORECAST(TRANSMODELS)
PACFPlot	Partial autocorrelation of regression residuals	SERIES(PACF)
ResidualHistogram	Distribution of regARIMA residuals	RESIDUAL(HIST)
SpectralPlot	Spectral plot of the seasonally adjusted series	ADJUSTED(SPECTRUM)
SpectralPlot	Spectral plot of irregular series	IRREGULAR(SPECTRUM)
SpectralPlot	Spectral plot of the regARIMA model residuals	RESIDUAL(SPECTRUM)

Table 37.15 *continued*

ODS Graph Name	Plot Description	PROC X12 PLOTS= Option
SpectralPlot	Spectral plot of the original series	SERIES(SPECTRUM)
SqErrorACFPlot	Autocorrelation of squared regARIMA model residuals	RESIDUAL(SQACF)

OUT= Data Set

You can use the OUTPUT statement to output the component series computed in the X-12-ARIMA decomposition.

The OUT= data set specified in the OUTPUT statement contains the BY variables (if any), the ID variables (if any), and the DATE= variable if the DATE= option is specified or the variable `_DATE_` if the DATE= option is not specified. If user-defined regressor variables or EVENT variables are specified, they are included. In addition, the various components specified by the table names in the OUTPUT statement are included in the OUT= data set.

The OUTPUT OUT= data set can contain the following variables:

BY variables	are the BY variables used to subset the series by BY groups. The BY variables included in this data set match the BY variables, if any, used to process the series in the DATA= data set.
ID variables	enable the series observations to be identified using further information. The ID variables included in this data set match the ID variables, if any, specified in the ID statement and input from the DATA= data set.
DATE variable	is the time ID variable used to process the time series. It is either the variable specified in the DATE= option in the PROC X12 statement or the variable <code>_DATE_</code> generated by the START= option in the PROC X12 statement.
<code>_YEAR_</code> variable	contains a value for the year of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
<code>_SEASON_</code> variable	contains a value for the month or quarter of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
User-defined variables	are variables specified in the INPUT statement or the USERVAR= option in the REGRESSION statement. The values of these variables are copied from the DATA= data set or from the AUXDATA= data set.
EVENT variables	variables specified in the EVENT statement. The values of these variables are computed based on the event definition and the dates of the time series observations.
Table variables	contains the data from the X-12-ARIMA decomposition tables: A1, A2, A6, A7, A8, A8AO, A8LS, A8TC, A9, A10, A19, B1, C17, C20, D1, D7, D8, D9, D10, D10B,

D10D, D11, D11A, D11F, D11R, D12, D13, D16, D16B, D18, E1, E2, E3, E5, E6, E6A, E6R, E7, E8, and MV1. The variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name.

SEATSDECOMP OUT= Data Set

You can use the [SEATSDECOMP](#) statement to output the component series that is computed using the SEATS method of seasonal decomposition.

The OUT= data set specified in the SEATSDECOMP statement contains the BY variables (if any), the ID variables (if any), and either the DATE= variable if the DATE= option is specified or the variable `_DATE_` if the DATE= option is not specified. If user-defined regressor variables or EVENT variables are specified, they are included. In addition, the five components computed by the SEATS decomposition method are included in the OUT= data set for each series.

The SEATSDECOMP OUT= data set can contain the following variables:

BY variables	are the BY variables used to subset the series by BY groups. The BY variables included in this data set match the BY variables (if any) that are used to process the series in the DATA= data set.
ID variables	enable the series observations to be identified using further information. The ID variables included in this data set match the ID variables (if any) that are specified in the ID statement and input from the DATA= data set.
DATE variable	is the time ID variable used to process the time series. It is either the variable specified in the DATE= option in the PROC X12 statement or the variable <code>_DATE_</code> that is generated by the START= option in the PROC X12 statement.
<code>_YEAR_</code> variable	contains a value for the year of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
<code>_SEASON_</code> variable	contains a value for the month or quarter of the date variable for the observation. This variable is included in the OUT= data set if YEARSEAS is specified in the OUTPUT statement.
User-defined variables	are variables specified in the INPUT statement or the USERVAR= option in the REGRESSION statement. The values of these variables are copied from the DATA= data set or from the AUXDATA= data set.
EVENT variables	are variables that are specified in the EVENT statement. The values of these are computed based on the event definition and the dates of the time series observations.
Component variables	contains the data from the SEATS decomposition tables. The variable name used in the output data set is the input variable name followed by an underscore and the corresponding table name.
<code><variable>_OS</code>	contains the original series for SEATS decomposition. This is the B1 series from the X-12-ARIMA method.
<code><variable>_SC</code>	contains the seasonal component series that is calculated by SEATS decomposition.
<code><variable>_TC</code>	contains the trend component series that is calculated by SEATS decomposition.

<code><variable>_SA</code>	contains the seasonally adjusted series that is calculated by SEATS decomposition.
<code><variable>_IC</code>	contains the irregular series that is calculated by SEATS decomposition.

Special Data Sets

The X12 procedure can input the MDLINFOIN= and output the MDLINFOOUT= data sets. The structure of both of these data sets is the same. The difference is that when the MDLINFOIN= data set is read, only information relative to specifying a model is processed, whereas the MDLINFOOUT= data set contains the results of estimating a model. The X12 procedure can also read data sets that contain event definition data. The structure of these data sets is the same as in the SAS[®] High Performance Forecasting system.

MDLINFOIN= and MDLINFOOUT= Data Sets

The MDLINFOIN= and MDLINFOOUT= data sets can contain the following variables:

BY variables	enable the model information to be specified by BY groups. BY variables can be included in this data set that match the BY variables used to process the series. If no BY variables are included, then the models specified by <code>_NAME_</code> in the MDLINFOIN= data set apply to all BY groups in the DATA= data set.
<code>_NAME_</code>	should contain the variable name of the time series to which a particular model is to be applied. Omit the <code>_NAME_</code> variable if you are specifying the same model for all series in a BY group.
<code>_MODELTYPE_</code>	specifies whether the observation contains regression or ARIMA information. The value of <code>_MODELTYPE_</code> should be either REG to supply regression information or ARIMA to supply model information. If valid regression information exists in the MDLINFOIN= data set for a BY group and series being processed, then the REGRESSION, INPUT, and EVENT statements are ignored for that BY group and series. Likewise, if valid ARIMA model information exists in the data set, then the AUTOMDL, ARIMA, and TRANSFORM statements are ignored. Valid values for the other variables in the data set depend on the value of the <code>_MODELTYPE_</code> variable. Although other values of <code>_MODELTYPE_</code> might be permitted in other SAS procedures, PROC X12 recognizes only REG and ARIMA.
<code>_MODELPART_</code>	further qualifies the regression information in the observation. For <code>_MODELTYPE_=REG</code> , valid values of <code>_MODELPART_</code> are INPUT, EVENT, and PREDEFINED. A value of INPUT indicates that this observation refers to the user-defined variable whose name is given in <code>_DSVAR_</code> . Likewise, a value of EVENT indicates that the observation refers to the SAS or user-defined event whose name is given in <code>_DSVAR_</code> . PREDEFINED indicates that the name given in <code>_DSVAR_</code> is a predefined U.S. Census Bureau variable. If only ARIMA model information is included in the data set (that is, all observations have <code>_MODELTYPE_=ARIMA</code>), then the <code>_MODELPART_</code> variable can be omitted. For observations where <code>_MODELTYPE_=ARIMA</code> , valid values for <code>_MODELPART_</code> are FORECAST, “.”, or blank.
<code>_COMPONENT_</code>	further qualifies the regression or ARIMA information in the observation. For <code>_MODELTYPE_=REG</code> , the only valid value of <code>_COMPONENT_</code> is SCALE. For <code>_MODELTYPE_=ARIMA</code> , the valid values of <code>_COMPONENT_</code> are TRANSFORM, CONSTANT, NON-SEASONAL, and SEASONAL. TRANSFORM indicates that the observation contains the information that would be supplied in the TRANSFORM statement. CONSTANT is

specified to control the constant term in the model. NONSEASONAL and SEASONAL refer to the AR, MA, and differencing terms in the ARIMA model.

<code>_PARMTYPE_</code>	further qualifies the regression or ARIMA information in the observation. For <code>_MODELTYPE_=REG</code> , the value of <code>_PARMTYPE_</code> is the same as the value of the <code>USERTYPE=</code> option in the REGRESSION statement. Since the <code>USERTYPE=</code> option applies only to user-defined events and variables, the value of <code>_PARMTYPE_</code> does not alter processing in observations where <code>_MODELPART_=PREDEFINED</code> . However, it is consistent to use a value for <code>_PARMTYPE_</code> that matches the U.S. Census Bureau predefined variable. For the constant term in the model information, <code>_PARMTYPE_</code> should be SCALE. For transformation information, the value of <code>_PARMTYPE_</code> should be NONE, LOG, LOGIT, SQRT, or BOXCOX. For <code>_MODELTYPE_=ARIMA</code> , valid values of <code>_PARMTYPE_</code> are AR, MA, and DIF.
<code>_DSVAR_</code>	specifies the variable name associated with the current observation. For <code>_MODELTYPE_=REG</code> , the value of <code>_DSVAR_</code> is the name of the user-defined variable, the event, or the U.S. Census Bureau predefined variable. For <code>_MODELTYPE_=ARIMA</code> , <code>_DSVAR_</code> should match the name of the series being processed. If the ARIMA model information applies to more than one series, then <code>_DSVAR_</code> can be blank or “:”, equivalently.
<code>_VALUE_</code>	contains a numerical value that is used as a parameter for certain types of information. For example, the <code>PREDEFINED=EASTER(6)</code> option in the REGRESSION statement is implemented in the MDLINFOIN= data set by using <code>_DSVAR_=EASTER</code> and <code>_VALUE_=6</code> . For a BOXCOX transformation, <code>_VALUE_</code> is set equal to the λ parameter value. For <code>_COMPONENT_=SEASONAL</code> , if <code>_VALUE_</code> is nonmissing, then <code>_VALUE_</code> is used as the seasonal period. If <code>_VALUE_</code> is missing for <code>_COMPONENT_=SEASONAL</code> , then the seasonal period is determined by the interval of the series.
<code>_FACTOR_</code>	applies only to the AR and MA portions of the ARIMA model. The value of <code>_FACTOR_</code> identifies the factor of the given AR or MA term. Therefore, the value of <code>_FACTOR_</code> is the same for all observations that are related to the same factor.
<code>_LAG_</code>	identifies the degree for differencing and AR and MA lags. If <code>_COMPONENT_=SEASONAL</code> , then the value in <code>_LAG_</code> is multiplied by the seasonal period indicated by the value of <code>_VALUE_</code> .
<code>_SHIFT_</code>	contains the shift value for transfer functions. This value is not processed by PROC X12, but it might be processed by other procedures in which transfer functions can be specified.
<code>_NOEST_</code>	indicates whether a parameter associated with the observation is to be estimated. For example, the NOINT option is indicated by <code>_COMPONENT_=CONSTANT</code> with <code>_NOEST_=1</code> and <code>_EST_=0</code> . <code>_NOEST_=1</code> indicates that the value in <code>_EST_</code> is a fixed value. <code>_NOEST_</code> pertains to the constant term, to AR and MA parameters, and to regression parameters.
<code>_EST_</code>	contains an initial or fixed value for a parameter associated with the observation that is to be estimated. <code>_NOEST_=1</code> indicates the value in <code>_EST_</code> is a fixed value. <code>_EST_</code> pertains to the constant term, to AR and MA parameters, and to regression parameters.
<code>_STDERR_</code>	contains output information about estimated parameters. The variable <code>_STDERR_</code> is not processed by the MDLINFOIN= data set for PROC X12. In the MDLINFOOUT= data set, <code>_STDERR_</code> contains the standard error that pertains to the estimated parameter in the variable <code>_EST_</code> .

<code>_TVALUE_</code>	contains output information about estimated parameters. The variable <code>_TVALUE_</code> is not processed by the MDLINFOIN= data set for PROC X12. In the MDLINFOOUT= data set, <code>_TVALUE_</code> contains the t value that pertains to the estimated parameter in the variable <code>_EST_</code> .
<code>_PVALUE_</code>	contains output information about estimated parameters. The variable <code>_PVALUE_</code> is not processed by the MDLINFOIN= data set for PROC X12. In the MDLINFOOUT= data set, <code>_PVALUE_</code> contains the p -value that pertains to the estimated parameter in the variable <code>_EST_</code> .

INEVENT= Data Set

The INEVENT= data set can contain the following variables. When a variable is omitted from the data set, that variable is assumed to have the default value for all observations. The default values are specified in the list.

<code>_NAME_</code>	specifies the event variable name. <code>_NAME_</code> is displayed with the case preserved. Since <code>_NAME_</code> is a SAS variable name, the event can be referenced by using any case. The <code>_NAME_</code> variable is required; there is no default.
<code>_CLASS_</code>	specifies the class of event: SIMPLE, COMBINATION, PREDEFINED. The default for <code>_CLASS_</code> is SIMPLE.
<code>_KEYNAME_</code>	contains either a date keyword (SIMPLE EVENT), a predefined event variable name (PREDEFINED EVENT), or an event name (COMBINATION EVENT). All <code>_KEYNAME_</code> values are displayed in upper case. However, if the <code>_KEYNAME_</code> value refers to an event name, then the actual name can be of mixed case. The default for <code>_KEYNAME_</code> is no keyname, designated by “.”.
<code>_STARTDATE_</code>	contains either the date timing value or the first date timing value to use in a do-list. The default for <code>_STARTDATE_</code> is no date, designated by a missing value.
<code>_ENDDATE_</code>	contains the last date timing value to use in a do-list. The default for <code>_ENDDATE_</code> is no date, designated by a missing value.
<code>_DATEINTRVL_</code>	contains the interval for the date do-list. The default for <code>_DATEINTRVL_</code> is no interval, designated by “.”.
<code>_STARTDT_</code>	contains either the datetime timing value or the first datetime timing value to use in a do-list. The default for <code>_STARTDT_</code> is no datetime, designated by a missing value.
<code>_ENDDT_</code>	contains the last datetime timing value to use in a do-list. The default for <code>_ENDDT_</code> is no datetime, designated by a missing value.
<code>_DTINTRVL_</code>	contains the interval for the datetime do-list. The default for <code>_DTINTRVL_</code> is no interval, designated by “.”.
<code>_STARTOBS_</code>	contains either the observation number timing value or the first observation number timing value to use in a do-list. The default for <code>_STARTOBS_</code> is no observation number, designated by a missing value.
<code>_ENDOBS_</code>	contains the last observation number timing value to use in a do-list. The default for <code>_ENDOBS_</code> is no observation number, designated by a missing value.
<code>_OBSINTRVL_</code>	contains the interval length of the observation number do-list. The default for <code>_OBSINTRVL_</code> is no interval, designated by “.”.

<code>_TYPE_</code>	specifies the type of event. The valid values of <code>_TYPE_</code> are POINT, LS, RAMP, TR, TEMPRAMP, TC, LIN, LINEAR, QUAD, CUBIC, INV, INVERSE, LOG, and LOGARITHMIC. The default for <code>_TYPE_</code> is POINT.
<code>_VALUE_</code>	specifies the value for nonzero observation. The default for <code>_VALUE_</code> is 1.0.
<code>_PULSE_</code>	specifies the interval that defines the units for the duration values. The default for <code>_PULSE_</code> is no interval, designated by “.”.
<code>_DUR_BEFORE_</code>	specifies the number of durations before the timing value. The default for <code>_DUR_BEFORE_</code> is 0.
<code>_DUR_AFTER_</code>	specifies the number of durations after the timing value. The default for <code>_DUR_AFTER_</code> is 0.
<code>_SLOPE_BEF_</code>	determines whether the curve is GROWTH or DECAY before the timing value for <code>_TYPE_=RAMP</code> , <code>_TYPE_=TEMPRAMP</code> , and <code>_TYPE_=TC</code> . Valid values are GROWTH and DECAY. The default for <code>_SLOPE_BEF_</code> is GROWTH.
<code>_SLOPE_AFT_</code>	determines whether the curve is GROWTH or DECAY after the timing value for <code>_TYPE_=RAMP</code> , <code>_TYPE_=TEMPRAMP</code> , and <code>_TYPE_=TC</code> . Valid values are GROWTH and DECAY. The default for <code>_SLOPE_AFT_</code> is GROWTH unless <code>_TYPE_=TC</code> ; then the default is DECAY.
<code>_SHIFT_</code>	specifies the number of <code>_PULSE_</code> intervals to shift the timing value. The shift can be positive (forward in time) or negative (backward in time). If <code>_PULSE_</code> is not specified, then the shift is in observations. The default for <code>_SHIFT_</code> is 0.
<code>_TCPARM_</code>	specifies the parameter for EVENT of TYPE=TC. The default for <code>_TCPARM_</code> is 0.5.
<code>_RULE_</code>	specifies the rule to use when combining events or when timing values of an event overlap. The valid values of <code>_RULE_</code> are ADD, MAX, MIN, MINNZ, MINMAG, and MULT. The default for <code>_RULE_</code> is ADD.
<code>_PERIOD_</code>	specifies the frequency interval at which the event should be repeated. If this value is missing, then the event is not periodic. The default for <code>_PERIOD_</code> is no interval, designated by “.”.
<code>_LABEL_</code>	specifies the label or description for the event. If a label is not specified, then the default label value is displayed as “.”. For events that produce dummy variables, either the user-supplied label or the default label is used. For COMPLEX events, the <code>_LABEL_</code> value is merely a description of the group of events.

OUTSTAT= Data Set

The OUTSTAT= data set can contain the following variables:

BY variables	sorts the statistics into BY groups. BY variables are included in this data set that match the BY variables used to process the series.
NAME	specifies the variable name of the time series to which the statistics apply.
STAT	describes the statistic that is stored in VALUE or CVALUE. STAT takes on the following values:

Period	the period of the series, 4 or 12.
Mode	the mode of the seasonal adjustment from the X11 statement. Possible values are ADD, MULT, LOGADD, and PSEUDOADD.
Start	the beginning of the model span expressed as <i>monyyyy</i> for monthly series or <i>yyyyQq</i> for quarterly series.
End	the end of the model span expressed as <i>monyyyy</i> for monthly series or <i>yyyyQq</i> for quarterly series.
NbFcst	the number of forecast observations.
SigmaLimLower	the lower sigma limit in standard deviation units.
SigmaLimUpper	the upper sigma limit in standard deviation units.
pLBQ_24	the Ljung-Box <i>Q</i> statistic of the residuals at lag 24, for monthly series. Note that lag 12 (pLBQ_12) and lag 16 (pLBQ_16) are included in the data set for quarterly series.
D8Fs	the stable seasonality <i>F</i> test value from Table D8.
D8Fm	the moving seasonality <i>F</i> test value from Table D8.
ISRatio	the final irregular-to-seasonal ratio from Table F 2.H.
SMA_ALL	the final seasonal moving average filter for all periods.
RSF	the residual seasonality <i>F</i> test value for Table D11 for the entire series.
RSF3	the residual seasonality <i>F</i> test value for Table D11 for the last three years.
RSFA	the residual seasonality <i>F</i> test value for Table D11.A for the entire series.
RSF3A	the residual seasonality <i>F</i> test value for Table D11.A for the last three years.
RSFR	the residual seasonality <i>F</i> test value for Table D11.R for the entire series.
RSF3R	the residual seasonality <i>F</i> test value for Table D11.R for the last three years.
TMA	the Henderson trend moving average filter selected.
ICRatio	the final irregular-to-trend cycle ratio from Table F 2.H.
E5sd	the standard deviation from Table E5.
E6sd	the standard deviation from Table E6.
E6Asd	the standard deviation from Table E6.A.
MCD	months of cyclical dominance.
Q	the overall level <i>Q</i> from Table F3.
Q2	<i>Q</i> overall level without M2 from Table F3.

FMT	indicates whether the format is numeric or character. FMT="NUM" if the value is numeric and stored in the VALUE variable. FMT="CHAR" if the value is a string and stored in the CVALUE variable.
VALUE	contains the numerical value of the statistic or missing if the statistic is of type character.
CVALUE	contains the character value of the text statistic or blank if the statistic is of type numeric.

Examples: X12 Procedure

Example 37.1: ARIMA Model Identification

This example shows typical PROC X12 statements that are used for ARIMA model identification. This example invokes the X12 procedure and uses the TRANSFORM and IDENTIFY statements. It specifies the time series data, takes the logarithm of the series (TRANSFORM statement), and generates ACFs and PACFs for the specified levels of differencing (IDENTIFY statement). The ACFs and PACFs for DIFF=1 and SDIFF=1 are shown in [Output 37.1.1](#), [Output 37.1.2](#), [Output 37.1.3](#), and [Output 37.1.4](#). The data set is the same as in the section “[Basic Seasonal Adjustment](#)” on page 2672.

The graphical displays are available when ODS Graphics is enabled. For more information about the graphics available in the X12 procedure, see the section “[ODS Graphics](#)” on page 2733.

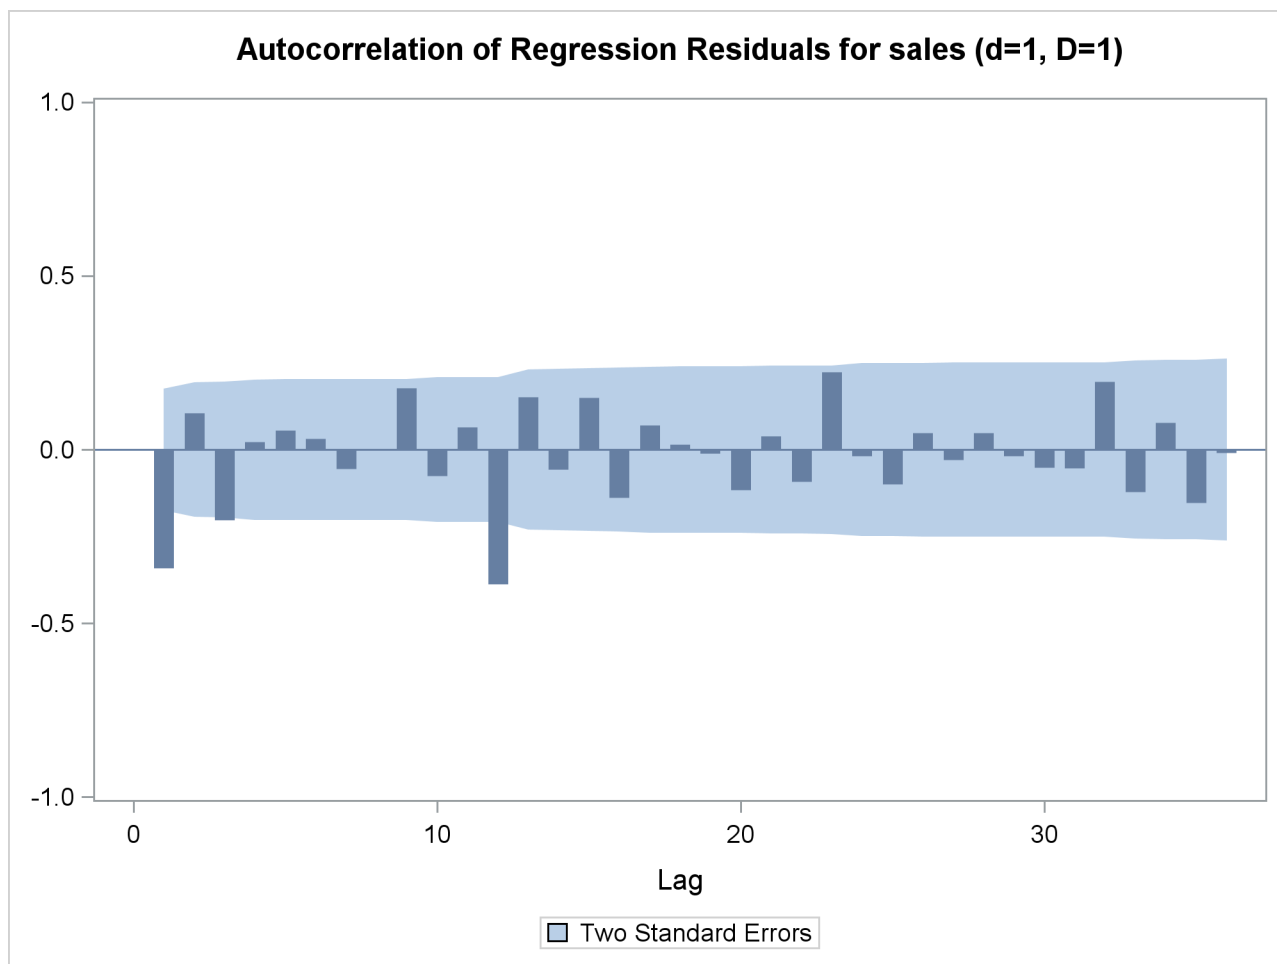
```
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  identify diff=(0,1) sdiff=(0,1);
run;
```

Output 37.1.1 ACFs (Nonseasonal Order=1 Seasonal Order=1)**The X12 Procedure**

Autocorrelation of Regression Residuals for ARIMA
Model Identification
For Variable sales
Differencing: Nonseasonal Order=1 Seasonal Order=1

Lag	Correlation	Standard Error	Chi-Square	DF	Pr > ChiSq
1	-0.34112	0.08737	15.5957	1	<.0001
2	0.10505	0.09701	17.0860	2	0.0002
3	-0.20214	0.09787	22.6478	3	<.0001
4	0.02136	0.10101	22.7104	4	0.0001
5	0.05565	0.10104	23.1387	5	0.0003
6	0.03080	0.10128	23.2709	6	0.0007
7	-0.05558	0.10135	23.7050	7	0.0013
8	-0.00076	0.10158	23.7050	8	0.0026
9	0.17637	0.10158	28.1473	9	0.0009
10	-0.07636	0.10389	28.9869	10	0.0013
11	0.06438	0.10432	29.5887	11	0.0018
12	-0.38661	0.10462	51.4728	12	<.0001
13	0.15160	0.11501	54.8664	13	<.0001
14	-0.05761	0.11653	55.3605	14	<.0001
15	0.14957	0.11674	58.7204	15	<.0001
16	-0.13894	0.11820	61.6452	16	<.0001
17	0.07048	0.11944	62.4045	17	<.0001
18	0.01563	0.11975	62.4421	18	<.0001
19	-0.01061	0.11977	62.4596	19	<.0001
20	-0.11673	0.11978	64.5984	20	<.0001
21	0.03855	0.12064	64.8338	21	<.0001
22	-0.09136	0.12074	66.1681	22	<.0001
23	0.22327	0.12126	74.2099	23	<.0001
24	-0.01842	0.12436	74.2652	24	<.0001
25	-0.10029	0.12438	75.9183	25	<.0001
26	0.04857	0.12500	76.3097	26	<.0001
27	-0.03024	0.12514	76.4629	27	<.0001
28	0.04713	0.12520	76.8387	28	<.0001
29	-0.01803	0.12533	76.8943	29	<.0001
30	-0.05107	0.12535	77.3442	30	<.0001
31	-0.05377	0.12551	77.8478	31	<.0001
32	0.19573	0.12569	84.5900	32	<.0001
33	-0.12242	0.12799	87.2543	33	<.0001
34	0.07775	0.12888	88.3401	34	<.0001
35	-0.15245	0.12924	92.5584	35	<.0001
36	-0.01000	0.13061	92.5767	36	<.0001

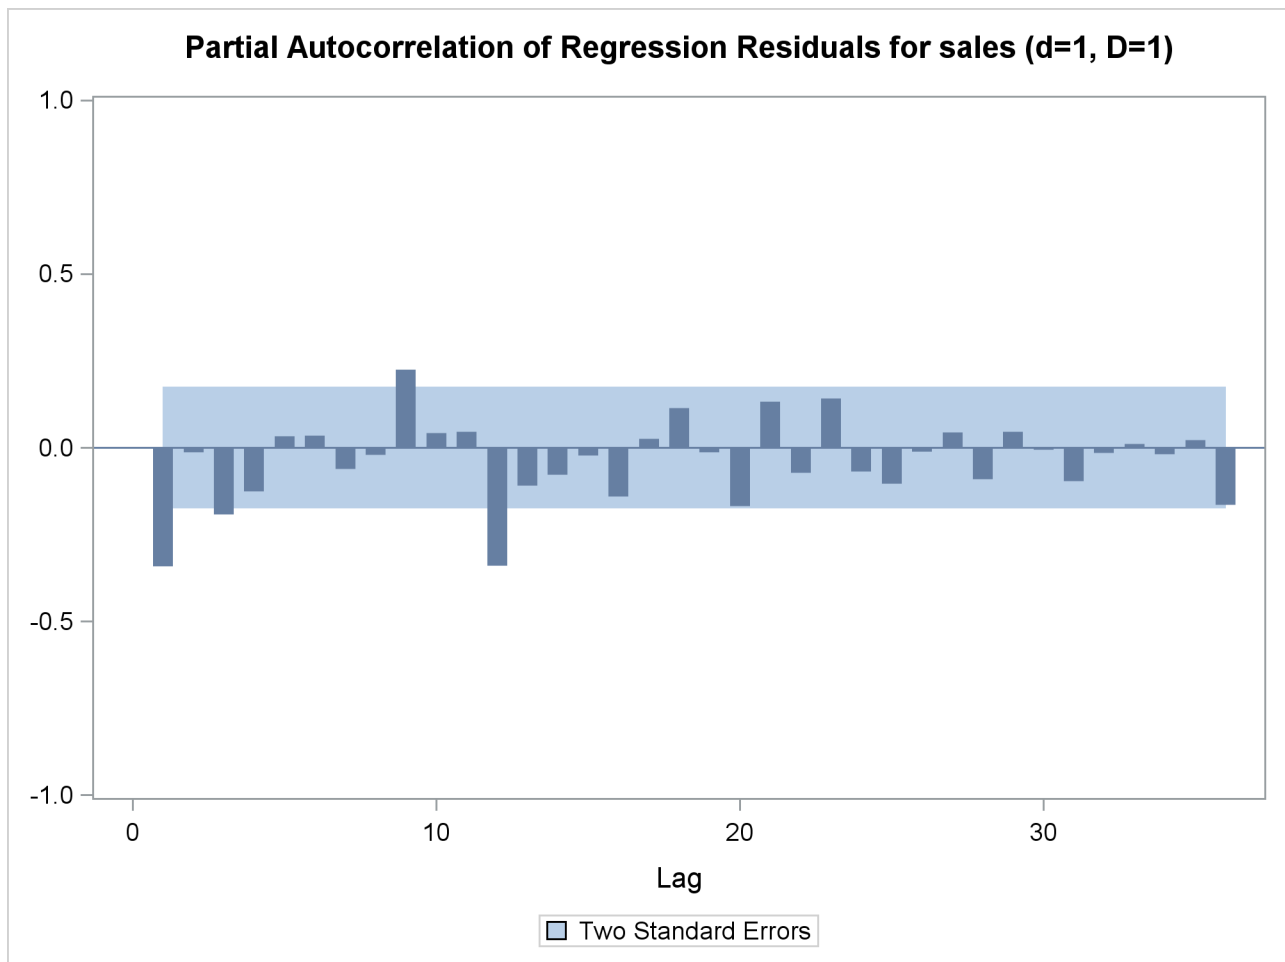
Note: The P-values approximate the probability of observing a Chi-Square at least this large when the model fitted is correct. When DF is positive, small values of P, customarily those below 0.05, indicate model inadequacy.

Output 37.1.2 Plot for ACFs (Nonseasonal Order=1 Seasonal Order=1)

Output 37.1.3 PACFs (Nonseasonal Order=1 Seasonal Order=1)

**Partial Autocorrelations of
Regression Residuals for
ARIMA Model Identification**
For Variable sales
**Differencing:
Nonseasonal Order=1
Seasonal Order=1**

Lag	Correlation	Standard Error
1	-0.34112	0.08737
2	-0.01281	0.08737
3	-0.19266	0.08737
4	-0.12503	0.08737
5	0.03309	0.08737
6	0.03468	0.08737
7	-0.06019	0.08737
8	-0.02022	0.08737
9	0.22558	0.08737
10	0.04307	0.08737
11	0.04659	0.08737
12	-0.33869	0.08737
13	-0.10918	0.08737
14	-0.07684	0.08737
15	-0.02175	0.08737
16	-0.13955	0.08737
17	0.02589	0.08737
18	0.11482	0.08737
19	-0.01316	0.08737
20	-0.16743	0.08737
21	0.13240	0.08737
22	-0.07204	0.08737
23	0.14285	0.08737
24	-0.06733	0.08737
25	-0.10267	0.08737
26	-0.01007	0.08737
27	0.04378	0.08737
28	-0.08995	0.08737
29	0.04690	0.08737
30	-0.00490	0.08737
31	-0.09638	0.08737
32	-0.01528	0.08737
33	0.01150	0.08737
34	-0.01916	0.08737
35	0.02303	0.08737
36	-0.16488	0.08737

Output 37.1.4 Plot for PACFs (Nonseasonal Order=1 Seasonal Order=1)

Example 37.2: Model Estimation

After studying the output from [Example 37.1](#) and identifying the ARIMA part of the model as, for example, (0 1 1)(0 1 1) 12, you can replace the IDENTIFY statement with the ARIMA and ESTIMATE statements as follows:

```
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  arima model=( 0,1,1 ) (0,1,1 ) ;
  estimate;
run ;
```

The parameter estimates and estimation summary statistics are shown in [Output 37.2.1](#).

Output 37.2.1 Estimation Data**The X12 Procedure****Exact ARMA Likelihood Estimation
Iteration Tolerances****For Variable sales**

Maximum Total ARMA Iterations	1500
Convergence Tolerance	1.0E-05

**Average absolute
percentage error in
within-sample forecasts:****For Variable sales**

Last year:	2.81
Last-1 year:	6.38
Last-2 year:	7.69
Last three years:	5.63

**Exact ARMA Likelihood Estimation
Iteration Summary****For Variable sales**

Number of ARMA iterations	6
Number of Function Evaluations	19

Exact ARMA Maximum Likelihood Estimation**For Variable sales**

Parameter	Lag	Standard			Pr > t
		Estimate	Error	t Value	
Nonseasonal MA	1	0.40181	0.07887	5.09	<.0001
Seasonal MA	12	0.55695	0.07626	7.30	<.0001

Estimation Summary**For Variable sales**

Number of Observations	144
Number of Residuals	131
Number of Parameters Estimated	3
Variance Estimate	1.3E-03
Standard Error Estimate	3.7E-02
Standard Error of Variance	1.7E-04
Log likelihood	244.6965
Transformation Adjustment	-735.2943
Adjusted Log likelihood	-490.5978
AIC	987.1956
AICC (F-corrected-AIC)	987.3845
Hannan Quinn	990.7005
BIC	995.8211

Example 37.3: Seasonal Adjustment

Assuming that the model in [Example 37.2](#) is satisfactory, a seasonal adjustment that uses forecast extension can be performed by adding the X11 statement to the procedure. By default, the data is forecast one year ahead at the end of the series.

```
ods output D8A#1=SalesD8A_1;
ods output D8A#2=SalesD8A_2;
ods output D8A#3=SalesD8A_3;
ods output D8A#4=SalesD8A_4;
proc x12 data=sales date=date;
  var sales;
  transform power=0;
  arima model=( 0,1,1) (0,1,1) );
  estimate;
  x11;
run;

title 'Stable Seasonality Test';
proc print data=SalesD8A_1 LABEL;
run;

title 'Nonparametric Stable Seasonality Test';
proc print data=SalesD8A_2 LABEL;
run;

title 'Moving Seasonality Test';
proc print data=SalesD8A_3 LABEL;
run;

title 'Combined Seasonality Test';
proc print data=SalesD8A_4 LABEL NOOBS;
  var _NAME_ Name1 Label1 cValue1;
run;
```

Table D8A, which contains the seasonality tests, is shown in [Output 37.3.1](#).

Output 37.3.1 Table D8A as Displayed

The X12 Procedure

**Table D 8.A: F-tests for Seasonality
For Variable sales**

Test for the Presence of Seasonality Assuming Stability				
	Sum of Squares	DF	Mean Square	F-Value
Between Months	23571.41	11	2142.855	190.9544 **
Residual	1481.28	132	11.22182	
Total	25052.69	143		

**** Seasonality present at the 0.1 percent level.**

Output 37.3.1 *continued*

Nonparametric Test for the Presence of Seasonality Assuming Stability		
Kruskal-Wallis Statistic	DF	Probability Level
131.9546	11	.00%

Seasonality present at the one percent level.

Moving Seasonality Test				
	Sum of Squares	DF	Mean Square	F-Value
Between Years	259.2517	10	25.92517	3.370317 **
Error	846.1424	110	7.692204	

****Moving seasonality present at the one percent level.**

Summary of Results and Combined Test for the Presence of Identifiable Seasonality	
Seasonality Tests:	Probability Level
Stable Seasonality F-test	0.000
Moving Seasonality F-test	0.001
Kruskal-Wallis Chi-square Test	0.000
Combined Measures:	Value
T1 = 7/F_Stable	0.04
T2 = 3*F_Moving/F_Stable	0.05
T = (T1 + T2)/2	0.04
Combined Test of Identifiable Seasonality:	Present

The four ODS statements in the preceding example direct output from the D8A tables into four data sets: SalesD8A_1, SalesD8A_2, SalesD8A_3, and SalesD8A_4. It is best to direct the output to four different data sets because the four tables associated with Table D8A have varying formats. The ODS data sets are shown in [Output 37.3.2](#), [Output 37.3.3](#), [Output 37.3.4](#), and [Output 37.3.5](#).

Output 37.3.2 Table D8A Output in Data Set SalesD8A_1**Stable Seasonality Test**

Obs	_NAME_	FT_SRC	Sum of Squares	DF	Mean Square	F-Value	FT_AST
1	sales	Between Months	23571.41	11	2142.855	190.9544	**
2	sales	Residual	1481.28	132	11.22182	.	.
3	sales	Total	25052.69	143	.	.	.

Output 37.3.3 Table D8A Output in Data Set SalesD8A_2**Nonparametric Stable Seasonality Test**

Obs	_NAME_	Kruskal-Wallis		Probability
		Statistic	DF	Level
1	sales	131.9546	11	.00%

Output 37.3.4 Table D8A Output in Data Set SalesD8A_3**Moving Seasonality Test**

Obs	_NAME_	FT_SRC	Sum of		Mean	F-Value	FT_AST
			Squares	DF	Square		
1	sales	Between Years	259.2517	10	25.92517	3.370317	**
2	sales	Error	846.1424	110	7.692204		.

Output 37.3.5 Table D8A Output in Data Set SalesD8A_4**Combined Seasonality Test**

NAME	Name1	Label1	cValue1
sales		Seasonality Tests:	Probability Level
sales			
sales	P_STABLE	Stable Seasonality F-test	0.000
sales	P_MOV	Moving Seasonality F-test	0.001
sales	P_KW	Kruskal-Wallis Chi-square Test	0.000
sales			
sales		Combined Measures:	Value
sales			
sales	T1	$T1 = 7/F_Stable$	0.04
sales	T2	$T2 = 3 * F_Moving / F_Stable$	0.05
sales	T	$T = (T1 + T2) / 2$	0.04
sales			
sales	IDSeasTest	Combined Test of Identifiable Seasonality:	Present

Example 37.4: RegARIMA Automatic Model Selection

This example demonstrates regARIMA modeling and TRAMO-based automatic model selection, which is available with the AUTOMDL statement. ODS SELECT statements are used to limit the displayed output to the model selection and estimation stages. The same data set is used as in the previous examples.

```

title 'TRAMO Automatic Model Identification';
ods select ModelEstimation.AutoModel.UnitRootTestModel
           ModelEstimation.AutoModel.UnitRootTest
           ModelEstimation.AutoModel.AutoChoiceModel
           ModelEstimation.AutoModel.Best5Model
           ModelEstimation.AutoModelAutomaticModelChoice
           ModelEstimation.AutoModel.FinalModelChoice
           ModelEstimation.AutoModelAutomdlNote;
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  regression predefined=td;
  automdl maxorder=(1,1)
          print=unitroottest unitroottestmdl autochoicemdl best5model;
  estimate;
  x11;
  output out=out(obs=23) a1 a2 a6 b1 c17 c20 d1 d7 d8 d9 d10
          d11 d12 d13 d16 d18;
run;

proc print data=out(obs=23);
  title 'Output Variables Related to Trading Day Regression';
run;

```

The automatic model selection output is shown in [Output 37.4.1](#), [Output 37.4.2](#), and [Output 37.4.3](#). The first table, “ARIMA Estimate for Unit Root Identification,” gives details of the method that TRAMO uses to automatically select the orders of differencing. The second table, “Results of Unit Root Test for Identifying Orders of Differencing,” shows that a regular difference order of 1 and a seasonal difference order of 1 has been determined by TRAMO. The third table, “Models Estimated by Automatic ARIMA Model Selection Procedure,” shows all the models examined by the TRAMO-based method. The fourth table, “Best Five ARIMA Models Chosen by Automatic Modeling,” shows the top five models in order of rank and their BIC2 statistic. The fifth table, “Comparison of Automatically Selected Model and Default Model,” compares the model selected by the TRAMO model to the default X-12-ARIMA model. The sixth table, “Final Automatic Model Selection,” shows which model was actually selected.

Output 37.4.1 Output from the AUTOMDL Statement**TRAMO Automatic Model Identification****The X12 Procedure**

ARIMA Estimates for Unit Root Identification					
For Variable sales					
Model Number	Estimation Method	Estimated Model	ARMA		
			Parameter	Estimate	
1	H-R	(2, 0, 0) (1, 0, 0)	NS_AR_1	0.67540	
	H-R	(2, 0, 0) (1, 0, 0)	NS_AR_2	0.28425	
	H-R	(2, 0, 0) (1, 0, 0)	S_AR_12	0.91963	
2	H-R	(1, 1, 1) (1, 0, 1)	NS_AR_1	0.13418	
	H-R	(1, 1, 1) (1, 0, 1)	S_AR_12	0.98500	
	H-R	(1, 1, 1) (1, 0, 1)	NS_MA_1	0.47884	
	H-R	(1, 1, 1) (1, 0, 1)	S_MA_12	0.51726	
3	H-R	(1, 1, 1) (1, 1, 1)	NS_AR_1	-0.39269	
	H-R	(1, 1, 1) (1, 1, 1)	S_AR_12	0.06223	
	H-R	(1, 1, 1) (1, 1, 1)	NS_MA_1	-0.09570	
	H-R	(1, 1, 1) (1, 1, 1)	S_MA_12	0.58536	

**Results of Unit Root Test for
Identifying Orders of
Differencing**

For Variable sales

Regular difference order	Seasonal difference order	Mean Significant
1	1	no

Output 37.4.2 Output from the AUTOMDL Statement

Models estimated by Automatic ARIMA Model Selection procedure					
For Variable sales					
Model Number	Estimated Model	ARMA		Statistics of Fit	
		Parameter	Estimate	BIC	BIC2
1	(3, 1, 0) (0, 1, 0)	NS_AR_1	-0.33524	1024.469	-3.40549
	(3, 1, 0) (0, 1, 0)	NS_AR_2	-0.05558		
	(3, 1, 0) (0, 1, 0)	NS_AR_3	-0.15649		
	(3, 1, 0) (0, 1, 0)				
2	(3, 1, 0) (0, 1, 1)	NS_AR_1	-0.33186	993.7880	-3.63970
	(3, 1, 0) (0, 1, 1)	NS_AR_2	-0.05823		
	(3, 1, 0) (0, 1, 1)	NS_AR_3	-0.15200		
	(3, 1, 0) (0, 1, 1)	S_MA_12	0.55279		
	(3, 1, 0) (0, 1, 1)				
3	(3, 1, 0) (1, 1, 0)	NS_AR_1	-0.38673	1000.224	-3.59057
	(3, 1, 0) (1, 1, 0)	NS_AR_2	-0.08768		
	(3, 1, 0) (1, 1, 0)	NS_AR_3	-0.18143		
	(3, 1, 0) (1, 1, 0)	S_AR_12	-0.47336		
	(3, 1, 0) (1, 1, 0)				
4	(3, 1, 0) (1, 1, 1)	NS_AR_1	-0.34352	998.0548	-3.60713
	(3, 1, 0) (1, 1, 1)	NS_AR_2	-0.06504		
	(3, 1, 0) (1, 1, 1)	NS_AR_3	-0.15728		
	(3, 1, 0) (1, 1, 1)	S_AR_12	-0.12163		
	(3, 1, 0) (1, 1, 1)	S_MA_12	0.47073		
5	(0, 1, 0) (0, 1, 1)	S_MA_12	0.60446	996.8560	-3.61628
	(0, 1, 0) (0, 1, 1)				
6	(0, 1, 1) (0, 1, 1)	NS_MA_1	0.36272	986.6405	-3.69426
	(0, 1, 1) (0, 1, 1)	S_MA_12	0.55599		
	(0, 1, 1) (0, 1, 1)				
7	(1, 1, 0) (0, 1, 1)	NS_AR_1	-0.32734	987.1500	-3.69037
	(1, 1, 0) (0, 1, 1)	S_MA_12	0.55834		
	(1, 1, 0) (0, 1, 1)				
8	(1, 1, 1) (0, 1, 1)	NS_AR_1	0.17833	991.2363	-3.65918
	(1, 1, 1) (0, 1, 1)	NS_MA_1	0.52867		
	(1, 1, 1) (0, 1, 1)	S_MA_12	0.56212		
	(1, 1, 1) (0, 1, 1)				
9	(0, 1, 1) (0, 1, 0)	NS_MA_1	0.36005	1017.770	-3.45663
	(0, 1, 1) (0, 1, 0)				

Output 37.4.3 Output from the AUTOMDL Statement**TRAMO Automatic Model Identification****The X12 Procedure****Automatic ARIMA Model Selection**

Methodology based on research by Gomez and Maravall (2000).

**Best Five ARIMA Models Chosen by
Automatic Modeling**

For Variable sales

Rank	Estimated Model	BIC2
1	(0, 1, 1) (0, 1, 1)	-3.69426
2	(1, 1, 0) (0, 1, 1)	-3.69037
3	(1, 1, 1) (0, 1, 1)	-3.65918
4	(0, 1, 0) (0, 1, 1)	-3.61628
5	(0, 1, 1) (0, 1, 0)	-3.45663

Comparison of Automatically Selected Model and Default Model

For Variable sales

Statistics of Fit

Source of Candidate Models	Estimated Model	Plbox	Rvr	Number of Outliers
Automatic Model Choice	(0, 1, 1) (0, 1, 1)	0.62560	0.03546	0
Airline Model (Default)	(0, 1, 1) (0, 1, 1)	0.62561	0.03546	0

Final Automatic Model Selection

For Variable sales

Source of Model	Estimated Model
Automatic Model Choice	(0, 1, 1) (0, 1, 1)

Table 37.16 and Output 37.4.4 illustrate the regARIMA modeling method. Table 37.16 shows the relationship between the output variables in PROC X12 that results from a regARIMA model. Note that some of these formulas apply only to this example. Output 37.4.4 shows the values of these variables for the first 23 observations in the example.

Table 37.16 regARIMA Output Variables and Descriptions

Table	Title	Type	Formula
A1	Time series data (for the span analyzed)	Data	Input
A2	Prior-adjustment factors leap year (from trading day regression) adjustments	Factor	Calculated from regression
A6	RegARIMA trading day component leap year prior adjustments included from Table A2	Factor	Calculated from regression
B1	Original series (prior adjusted) (adjusted for regARIMA factors)	Data	$B1 = A1/A6 *$ * because only TD specified
C17	Final weights for irregular component	Factor	Calculated using moving standard deviation
C20	Final extreme value adjustment factors	Factor	Calculated using C16 and C17
D1	Modified original data, D iteration	Data	$D1 = B1/C20 **$ $D1 = C19/C20$ ** $C19 = B1$ in this example
D7	Preliminary trend cycle, D iteration	Data	Calculated using Henderson moving average
D8	Final unmodified SI ratios	Factor	$D8 = B1/D7 ***$ $D8 = C19/D7$ *** TD specified in regression
D9	Final replacement values for SI ratios	Factor	If C17 shows extreme values, $D9 = D1/D7$; $D9 = .$ otherwise
D10	Final seasonal factors	Factor	Calculated using moving averages
D11	Final seasonally adjusted data (also adjusted for trading day)	Data	$D11 = B1/D10 ****$ $D11 = C19/D10$ **** $B1 = C19$ for this example
D12	Final trend cycle	Data	Calculated using Henderson moving average
D13	Final irregular component	Factor	$D13 = D11/D12$
D16	Combined adjustment factors (includes seasonal, trading day factors)	Factor	$D16 = A1/D11$
D18	Combined calendar adjustment factors (includes trading day factors)	Factor	$D18 = D16/D10$ $D18 = A6 *****$ ***** regression TD is the only calendar adjustment factor in this example

Output 37.4.4 Output Variables Related to Trading Day Regression**Output Variables Related to Trading Day Regression**

Obs	DATE	sales_A1	sales_A2	sales_A6	sales_B1	sales_C17	sales_C20	sales_D1	sales_D7	sales_D8
1	SEP78	112	1.00000	1.01328	110.532	1.00000	1.00000	110.532	124.138	0.89040
2	OCT78	118	1.00000	0.99727	118.323	1.00000	1.00000	118.323	124.905	0.94731
3	NOV78	132	1.00000	0.98960	133.388	1.00000	1.00000	133.388	125.646	1.06161
4	DEC78	129	1.00000	1.00957	127.777	1.00000	1.00000	127.777	126.231	1.01225
5	JAN79	121	1.00000	0.99408	121.721	1.00000	1.00000	121.721	126.557	0.96179
6	FEB79	135	0.99115	0.99115	136.205	1.00000	1.00000	136.205	126.678	1.07521
7	MAR79	148	1.00000	1.00966	146.584	1.00000	1.00000	146.584	126.825	1.15580
8	APR79	148	1.00000	0.99279	149.075	1.00000	1.00000	149.075	127.038	1.17347
9	MAY79	136	1.00000	0.99406	136.813	1.00000	1.00000	136.813	127.433	1.07360
10	JUN79	119	1.00000	1.01328	117.440	1.00000	1.00000	117.440	127.900	0.91822
11	JUL79	104	1.00000	0.99727	104.285	1.00000	1.00000	104.285	128.499	0.81156
12	AUG79	118	1.00000	0.99678	118.381	1.00000	1.00000	118.381	129.253	0.91589
13	SEP79	115	1.00000	1.00229	114.737	0.98630	0.99964	114.778	130.160	0.88151
14	OCT79	126	1.00000	0.99408	126.751	0.88092	1.00320	126.346	131.238	0.96581
15	NOV79	141	1.00000	1.00366	140.486	1.00000	1.00000	140.486	132.699	1.05869
16	DEC79	135	1.00000	0.99872	135.173	1.00000	1.00000	135.173	134.595	1.00429
17	JAN80	125	1.00000	0.99406	125.747	0.00000	0.95084	132.248	136.820	0.91906
18	FEB80	149	1.02655	1.03400	144.100	1.00000	1.00000	144.100	139.215	1.03509
19	MAR80	170	1.00000	0.99872	170.217	1.00000	1.00000	170.217	141.559	1.20245
20	APR80	170	1.00000	0.99763	170.404	1.00000	1.00000	170.404	143.777	1.18520
21	MAY80	158	1.00000	1.00966	156.489	1.00000	1.00000	156.489	145.925	1.07239

Obs	sales_D9	sales_D10	sales_D11	sales_D12	sales_D13	sales_D16	sales_D18
1	.	0.90264	122.453	124.448	0.98398	0.91463	1.01328
2	.	0.94328	125.438	125.115	1.00258	0.94070	0.99727
3	.	1.06320	125.459	125.723	0.99790	1.05214	0.98960
4	.	0.99534	128.375	126.205	1.01720	1.00487	1.00957
5	.	0.97312	125.083	126.479	0.98896	0.96735	0.99408
6	.	1.05931	128.579	126.587	1.01574	1.04994	0.99115
7	.	1.17842	124.391	126.723	0.98160	1.18980	1.00966
8	.	1.18283	126.033	126.902	0.99315	1.17430	0.99279
9	.	1.06125	128.916	127.257	1.01303	1.05495	0.99406
10	.	0.91663	128.121	127.747	1.00293	0.92881	1.01328
11	.	0.81329	128.226	128.421	0.99848	0.81107	0.99727
12	.	0.91135	129.897	129.316	1.00449	0.90841	0.99678
13	0.88182	0.90514	126.761	130.347	0.97249	0.90722	1.00229
14	0.96273	0.93820	135.100	131.507	1.02732	0.93264	0.99408
15	.	1.06183	132.306	132.937	0.99525	1.06571	1.00366
16	.	0.99339	136.072	134.720	1.01004	0.99212	0.99872
17	0.96658	0.97481	128.996	136.763	0.94321	0.96902	0.99406
18	.	1.06153	135.748	138.996	0.97663	1.09762	1.03400
19	.	1.17965	144.295	141.221	1.02177	1.17814	0.99872
20	.	1.18499	143.802	143.397	1.00283	1.18218	0.99763
21	.	1.06005	147.624	145.591	1.01397	1.07028	1.00966

Output 37.4.4 *continued***Output Variables Related to Trading Day Regression**

Obs	DATE	sales_A1	sales_A2	sales_A6	sales_B1	sales_C17	sales_C20	sales_D1	sales_D7	sales_D8
22	JUN80	133	1.00000	0.99279	133.966	1.00000	1.00000	133.966	148.133	0.90436
23	JUL80	114	1.00000	0.99406	114.681	0.00000	0.94057	121.927	150.682	0.76108

Obs	sales_D9	sales_D10	sales_D11	sales_D12	sales_D13	sales_D16	sales_D18
22	.	0.91971	145.662	147.968	0.98442	0.91307	0.99279
23	0.80917	0.81275	141.103	150.771	0.93588	0.80792	0.99406

Example 37.5: Automatic Outlier Detection

This example demonstrates the use of the OUTLIER statement to automatically detect and remove outliers from a time series to be seasonally adjusted. The data set is the same as in the section “[Basic Seasonal Adjustment](#)” on page 2672 and the previous examples. Adding the OUTLIER statement to [Example 37.3](#) requests that outliers be detected by using the default critical value as described in the section “[OUTLIER Statement](#)” on page 2699. The tables associated with outlier detection for this example are shown in [Output 37.5.1](#). The first table shows the critical values; the second table shows that a single potential outlier was identified; the third table shows the estimates for the ARMA parameters. Since no outliers are included in the regression model, the “Regression Model Parameter Estimates” table is not displayed. Because only a potential outlier was identified, and not an actual outlier, in this case the A1 series and the B1 series are identical.

```

title 'Automatic Outlier Identification';
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  arima model=( 0,1,1)(0,1,1) );
  outlier;
  estimate;
  x11;
  output out=nooutlier a1 b1 d10;
run ;

```

Output 37.5.1 PROC X12 Output When Potential Outliers Are Identified**Automatic Outlier Identification****The X12 Procedure**

Critical Values to use in Outlier Detection For Variable sales	
Begin	SEP1978
End	AUG1990
Observations	144
Method	Add One
AO Critical Value	3.889838
LS Critical Value	3.889838

Output 37.5.1 *continued*

Note: The following time series values might later be identified as outliers when data are added or revised. They were not identified as outliers in this run either because their test t-statistics were slightly below the critical value or because they were eliminated during the backward deletion step of the identification procedure, when a non-robust t-statistic is used.

Potential Outliers						
For Variable sales						
Type of Outlier	Date	t Value for AO	t Value for LS			
AO	NOV1989	-3.48	-1.51			

Exact ARMA Maximum Likelihood Estimation						
For Variable sales						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal MA	1	0.40181	0.07887	5.09	<.0001	
Seasonal MA	12	0.55695	0.07626	7.30	<.0001	

In the next example, reducing the critical value to 3.3 causes the outlier identification routine to more aggressively identify outliers as shown in [Output 37.5.2](#). The first table shows the critical values. The second table shows that three additive outliers and a level-shift have been included in the regression model. The third table shows how the inclusion of outliers in the model affects the ARMA parameters.

```
proc x12 data=sales date=date;
  var sales;
  transform function=log;
  arima model=((0,1,1) (0,1,1));
  outlier cv=3.3;
  estimate;
  x11;
  output out=outlier(obs=50) a1 a8 a8ao a8ls b1 d10;
run;

proc print data=outlier(obs=50);
run;
```

Output 37.5.2 PROC X12 Output When Outliers Are Identified**Automatic Outlier Identification****The X12 Procedure**

Critical Values to use in Outlier Detection	
For Variable sales	
Begin	SEP1978
End	AUG1990
Observations	144
Method	Add One
AO Critical Value	3.3
LS Critical Value	3.3

Regression Model Parameter Estimates**For Variable sales**

Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Automatically Identified	AO JAN1981	Est	0.09590	0.02168	4.42	<.0001
	LS FEB1983	Est	-0.09673	0.02488	-3.89	0.0002
	AO OCT1983	Est	-0.08032	0.02146	-3.74	0.0003
	AO NOV1989	Est	-0.10323	0.02480	-4.16	<.0001

Exact ARMA Maximum Likelihood Estimation**For Variable sales**

Parameter	Lag	Estimate	Standard Error	t Value	Pr > t
Nonseasonal MA	1	0.33205	0.08239	4.03	<.0001
Seasonal MA	12	0.49647	0.07676	6.47	<.0001

The first 50 observations of the A1, A8, A8AO, A8LS, B1, and D10 series are displayed in [Output 37.5.3](#). You can confirm the following relationships from the data:

$$A8 = A8AO \times A8LS$$

$$B1 = A1/A8$$

The seasonal factors are stored in the variable sales_D10.

Output 37.5.3 PROC X12 Output Series Related to Outlier Detection**Automatic Outlier Identification**

Obs	DATE	sales_A1	sales_A8	sales_A8AO	sales_A8LS	sales_B1	sales_D10
1	SEP78	112	1.10156	1.00000	1.10156	101.674	0.90496
2	OCT78	118	1.10156	1.00000	1.10156	107.121	0.94487
3	NOV78	132	1.10156	1.00000	1.10156	119.830	1.04711
4	DEC78	129	1.10156	1.00000	1.10156	117.107	1.00119
5	JAN79	121	1.10156	1.00000	1.10156	109.844	0.94833
6	FEB79	135	1.10156	1.00000	1.10156	122.553	1.06817
7	MAR79	148	1.10156	1.00000	1.10156	134.355	1.18679
8	APR79	148	1.10156	1.00000	1.10156	134.355	1.17607
9	MAY79	136	1.10156	1.00000	1.10156	123.461	1.07565
10	JUN79	119	1.10156	1.00000	1.10156	108.029	0.91844
11	JUL79	104	1.10156	1.00000	1.10156	94.412	0.81206
12	AUG79	118	1.10156	1.00000	1.10156	107.121	0.91602
13	SEP79	115	1.10156	1.00000	1.10156	104.397	0.90865
14	OCT79	126	1.10156	1.00000	1.10156	114.383	0.94131
15	NOV79	141	1.10156	1.00000	1.10156	128.000	1.04496
16	DEC79	135	1.10156	1.00000	1.10156	122.553	0.99766
17	JAN80	125	1.10156	1.00000	1.10156	113.475	0.94942
18	FEB80	149	1.10156	1.00000	1.10156	135.263	1.07172
19	MAR80	170	1.10156	1.00000	1.10156	154.327	1.18663
20	APR80	170	1.10156	1.00000	1.10156	154.327	1.18105
21	MAY80	158	1.10156	1.00000	1.10156	143.433	1.07383
22	JUN80	133	1.10156	1.00000	1.10156	120.738	0.91930
23	JUL80	114	1.10156	1.00000	1.10156	103.490	0.81385
24	AUG80	140	1.10156	1.00000	1.10156	127.093	0.91466
25	SEP80	145	1.10156	1.00000	1.10156	131.632	0.91302
26	OCT80	150	1.10156	1.00000	1.10156	136.171	0.93086
27	NOV80	178	1.10156	1.00000	1.10156	161.589	1.03965
28	DEC80	163	1.10156	1.00000	1.10156	147.972	0.99440
29	JAN81	172	1.21243	1.10065	1.10156	141.864	0.95136
30	FEB81	178	1.10156	1.00000	1.10156	161.589	1.07981
31	MAR81	199	1.10156	1.00000	1.10156	180.653	1.18661
32	APR81	199	1.10156	1.00000	1.10156	180.653	1.19097
33	MAY81	184	1.10156	1.00000	1.10156	167.036	1.06905
34	JUN81	162	1.10156	1.00000	1.10156	147.064	0.92446
35	JUL81	146	1.10156	1.00000	1.10156	132.539	0.81517
36	AUG81	166	1.10156	1.00000	1.10156	150.695	0.91148
37	SEP81	171	1.10156	1.00000	1.10156	155.234	0.91352
38	OCT81	180	1.10156	1.00000	1.10156	163.405	0.91632
39	NOV81	193	1.10156	1.00000	1.10156	175.206	1.03194
40	DEC81	181	1.10156	1.00000	1.10156	164.312	0.98879
41	JAN82	183	1.10156	1.00000	1.10156	166.128	0.95699
42	FEB82	218	1.10156	1.00000	1.10156	197.901	1.09125
43	MAR82	230	1.10156	1.00000	1.10156	208.795	1.19059
44	APR82	242	1.10156	1.00000	1.10156	219.688	1.20448
45	MAY82	209	1.10156	1.00000	1.10156	189.731	1.06355
46	JUN82	191	1.10156	1.00000	1.10156	173.391	0.92897
47	JUL82	172	1.10156	1.00000	1.10156	156.142	0.81476

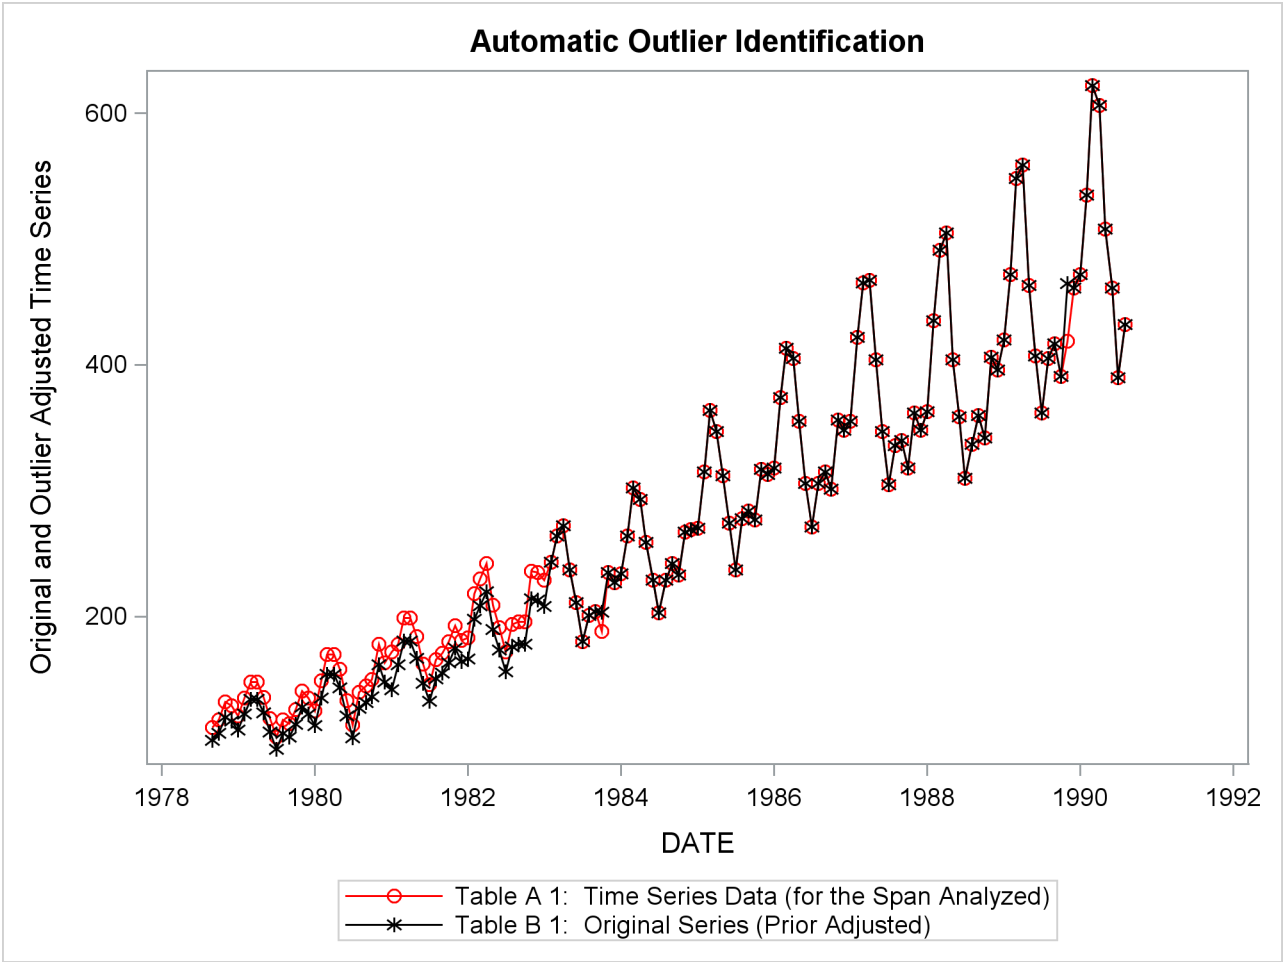
Output 37.5.3 *continued*
Automatic Outlier Identification

Obs	DATE	sales_A1	sales_A8	sales_A8AO	sales_A8LS	sales_B1	sales_D10
48	AUG82	194	1.10156	1.00000	1.10156	176.114	0.90667
49	SEP82	196	1.10156	1.00000	1.10156	177.930	0.91200
50	OCT82	196	1.10156	1.00000	1.10156	177.930	0.89970

From the two previous examples, you can examine how outlier detection affects the seasonally adjusted series. [Output 37.5.4](#) shows a plot of A1 versus B1 in the series where outliers are detected. B1 has been adjusted for the additive outliers and the level-shift.

```
proc sgplot data=outlier;
  series x=date y=sales_A1 / name='A1' markers
                                markerattrs=(color=red symbol='circle')
                                lineattrs=(color=red);
  series x=date y=sales_B1 / name='B1' markers
                                markerattrs=(color=black symbol='asterisk')
                                lineattrs=(color=black);
  yaxis label='Original and Outlier Adjusted Time Series';
run;
```

Output 37.5.4 Original Series and Outlier Adjusted Series

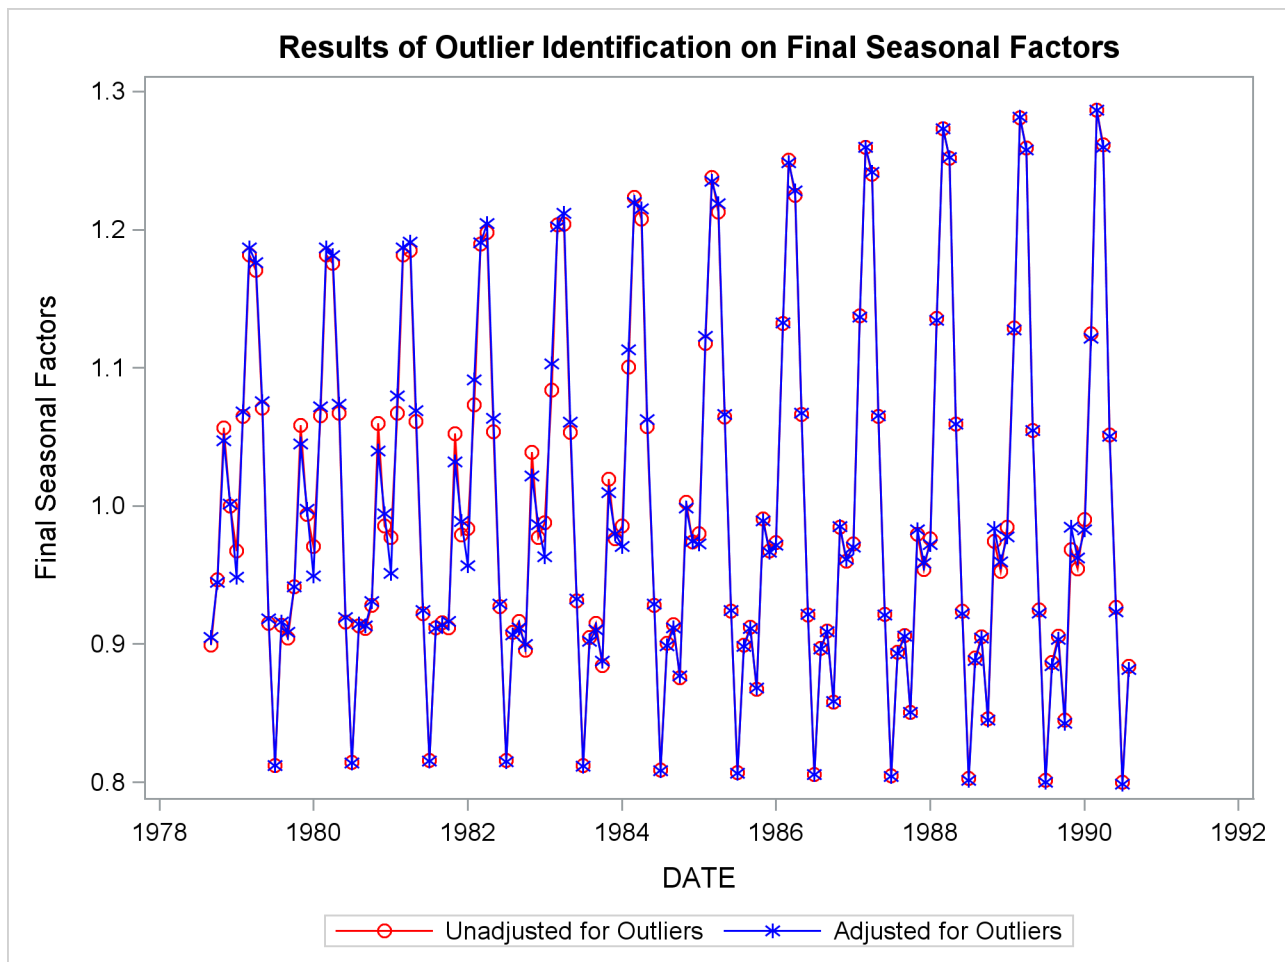


Output 37.5.5 compares the seasonal factors (table D10) of the series unadjusted for outliers to the series adjusted for outliers. The seasonal factors are based on the B1 series.

```
data both;
  merge nooutlier(rename=(sales_D10=unadj_D10)) outlier;
run;

title 'Results of Outlier Identification on Final Seasonal Factors';
proc sgplot data=both;
  series x=date y=unadj_D10 / name='unadjusted' markers
        markerattrs=(color=red symbol='circle')
        lineattrs=(color=red)
        legendlabel='Unadjusted for Outliers';
  series x=date y=sales_D10 / name='adjusted' markers
        markerattrs=(color=blue symbol='asterisk')
        lineattrs=(color=blue)
        legendlabel='Adjusted for Outliers';
  yaxis label='Final Seasonal Factors';
run;
```

Output 37.5.5 Seasonal Factors Based on Original and Outlier Adjusted Series



Example 37.6: User-Defined Regressors

This example demonstrates the use of the `USERVAR=` option in the `REGRESSION` statement to include user-defined regressors in the `regARIMA` model. The user-defined regressors must be defined as nonmissing values for the span of the series being modeled plus any backcast or forecast values. Suppose you have the data set `SALESdata` with 132 monthly observations beginning in January of 1949.

```
title 'Data Set to be Seasonally Adjusted';
data salesdata;
    set sashelp.air(obs=132);
run;
```

Because the `regARIMA` model forecasts one year ahead, you must define the regressor for 144 observations that start in January of 1949. You can construct a simple length-of-month regressor by using the following `DATA` step:

```
title 'User-defined Regressor for Data to be Seasonally Adjusted';
data regressors(keep=date LengthOfMonth);
    set sashelp.air;
    LengthOfMonth = INTNX('MONTH',date,1) - date;
run;
```

In this example, the two data sets are merged to use them as input to `PROC X12`. You can also use the `AUXDATA=` data set to input user-defined regressors. See [Example 37.11](#) for more information. The `BY` statement is used to align the regressors with the time series by the time ID variable `DATE`.

```
title 'Data Set Containing Series and Regressors';
data datain;
    merge regressors salesdata;
    by date;
run;

proc print data=datain(firstobs=121);
run;
```

The last 24 observations of the input data set are displayed in [Output 37.6.1](#). The regressor variable is defined for one year (12 observations) beyond the span of the time series to be seasonally adjusted.

Output 37.6.1 PROC X12 Input Data Set with User-Defined Regressor**Data Set Containing Series and Regressors**

Obs	DATE	LengthOfMonth	AIR
121	JAN59	31	360
122	FEB59	28	342
123	MAR59	31	406
124	APR59	30	396
125	MAY59	31	420
126	JUN59	30	472
127	JUL59	31	548
128	AUG59	31	559
129	SEP59	30	463
130	OCT59	31	407
131	NOV59	30	362
132	DEC59	31	405
133	JAN60	31	.
134	FEB60	29	.
135	MAR60	31	.
136	APR60	30	.
137	MAY60	31	.
138	JUN60	30	.
139	JUL60	31	.
140	AUG60	31	.
141	SEP60	30	.
142	OCT60	31	.
143	NOV60	30	.
144	DEC60	31	.

The DATAIN data set is now ready to be used as input to PROC X12. The DATE= variable and the user-defined regressors are automatically excluded from the variables to be seasonally adjusted.

```

title 'regARIMA Model with User-defined Regressor';
proc x12 data=datain date=DATE interval=MONTH plots=none;
  transform function=log;
  regression uservar=LengthOfMonth / usertype=lom;
  automdl;
  x11;
  output out=out a1 d11;
run;

```

The parameter estimates for the regARIMA model are shown in [Output 37.6.2](#)

Output 37.6.2 PROC X12 Output for User-Defined Regression Parameter
regARIMA Model with User-defined Regressor

The X12 Procedure

Regression Model Parameter Estimates						
For Variable AIR						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	LengthOfMonth	Est	0.04683	0.01834	2.55	0.0119

Exact ARMA Maximum Likelihood Estimation						
For Variable AIR						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal MA	1	0.33678	0.08506	3.96	0.0001	
Seasonal MA	12	0.54078	0.07726	7.00	<.0001	

Another way to include user-defined regressors in the regARIMA model is to specify the `SPAN=` option in the PROC X12 statement. The following user-defined regressor is similar to the one defined previously. However, this length-of-month regressor is mean adjusted. Using a zero-mean regressor prevents the regressor from altering the level of the series. In this instance, the series to be seasonally adjusted, AIR, and the regression variable, LengthOfMonth, have nonmissing observations at all time periods in the data set DATAIN.

```
title 'User-defined Regressor for Data to be Seasonally Adjusted, Mean Adjusted';
data datain(keep=date AIR LengthOfMonth);
  set sashelp.air;
  LengthOfMonth = INTNX('MONTH',date,1) - date - 30.4375;
run;
```

Because the default forecast period is one year ahead, the span of the series must be limited to one year before the end of the regression variable definition to forecast using the regression variable LengthOfMonth,

```
title 'regARIMA Model with Zero-Mean User-defined Regressor';
proc x12 data=datain date=DATE interval=MONTH span=(,DEC1959) plots=none;
  transform function=log;
  regression uservar=LengthOfMonth / usertype=lom;
  automdl;
  x11;
  output out=outzm a1 d11;
run;
```

The parameter estimates for the regARIMA model that are estimated using a zero-mean regressor are shown in [Output 37.6.3](#)

Output 37.6.3 PROC X12 Output for Zero-Mean User-Defined Regression Parameter
regARIMA Model with Zero-Mean User-defined Regressor

The X12 Procedure

Regression Model Parameter Estimates						
For Variable AIR						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	LengthOfMonth	Est	0.04683	0.01834	2.55	0.0119

Exact ARMA Maximum Likelihood Estimation						
For Variable AIR						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal MA	1	0.33678	0.08506	3.96	0.0001	
Seasonal MA	12	0.54078	0.07726	7.00	<.0001	

Specifying USERTYPE=LOM causes the regression effect to be removed from the seasonally adjusted series. The effect of the mean of the regression variable on the seasonally adjusted series can be seen by examining the plots of the original series and the seasonally adjusted series.

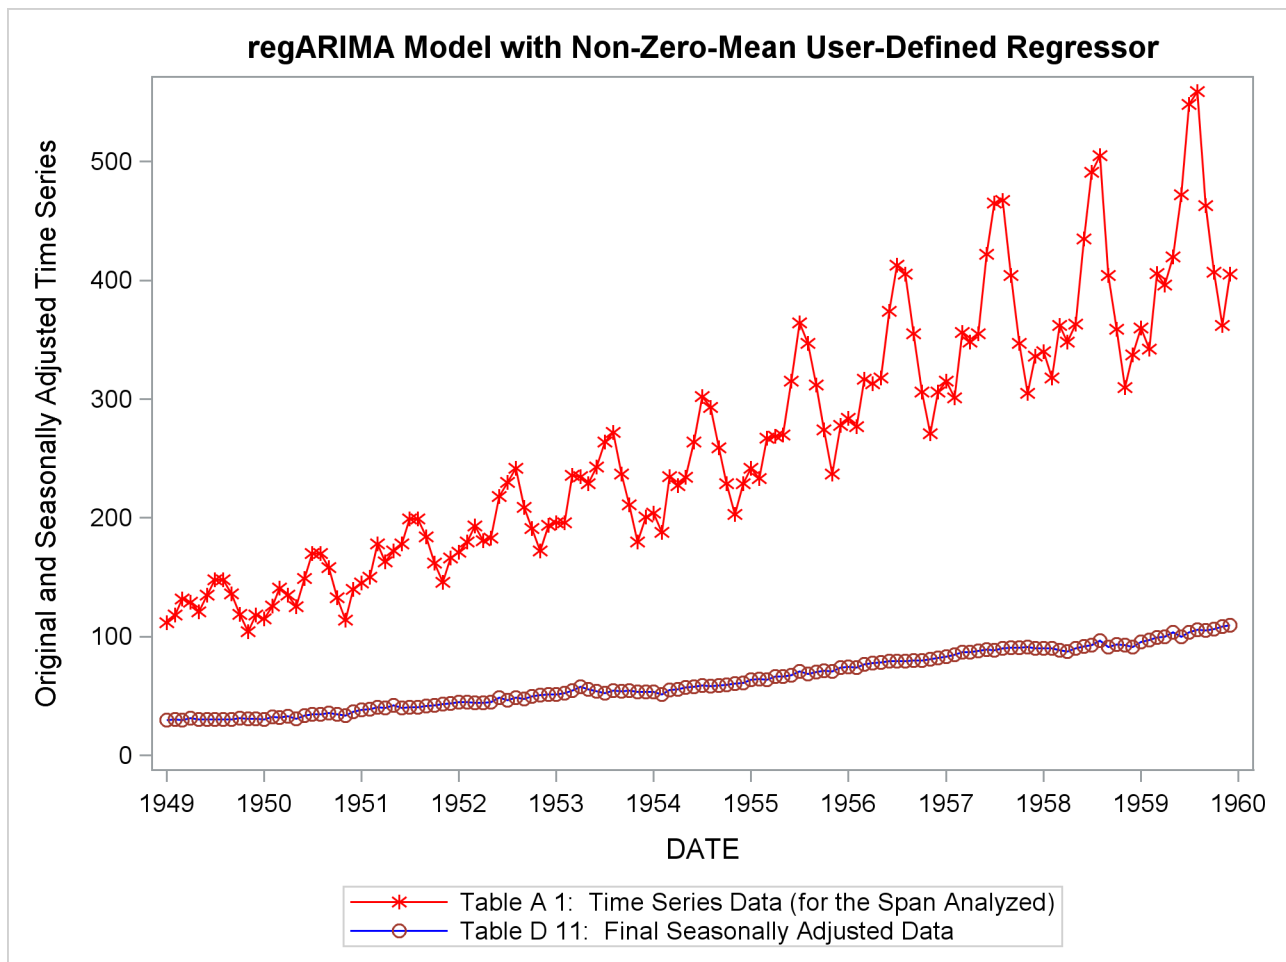
```

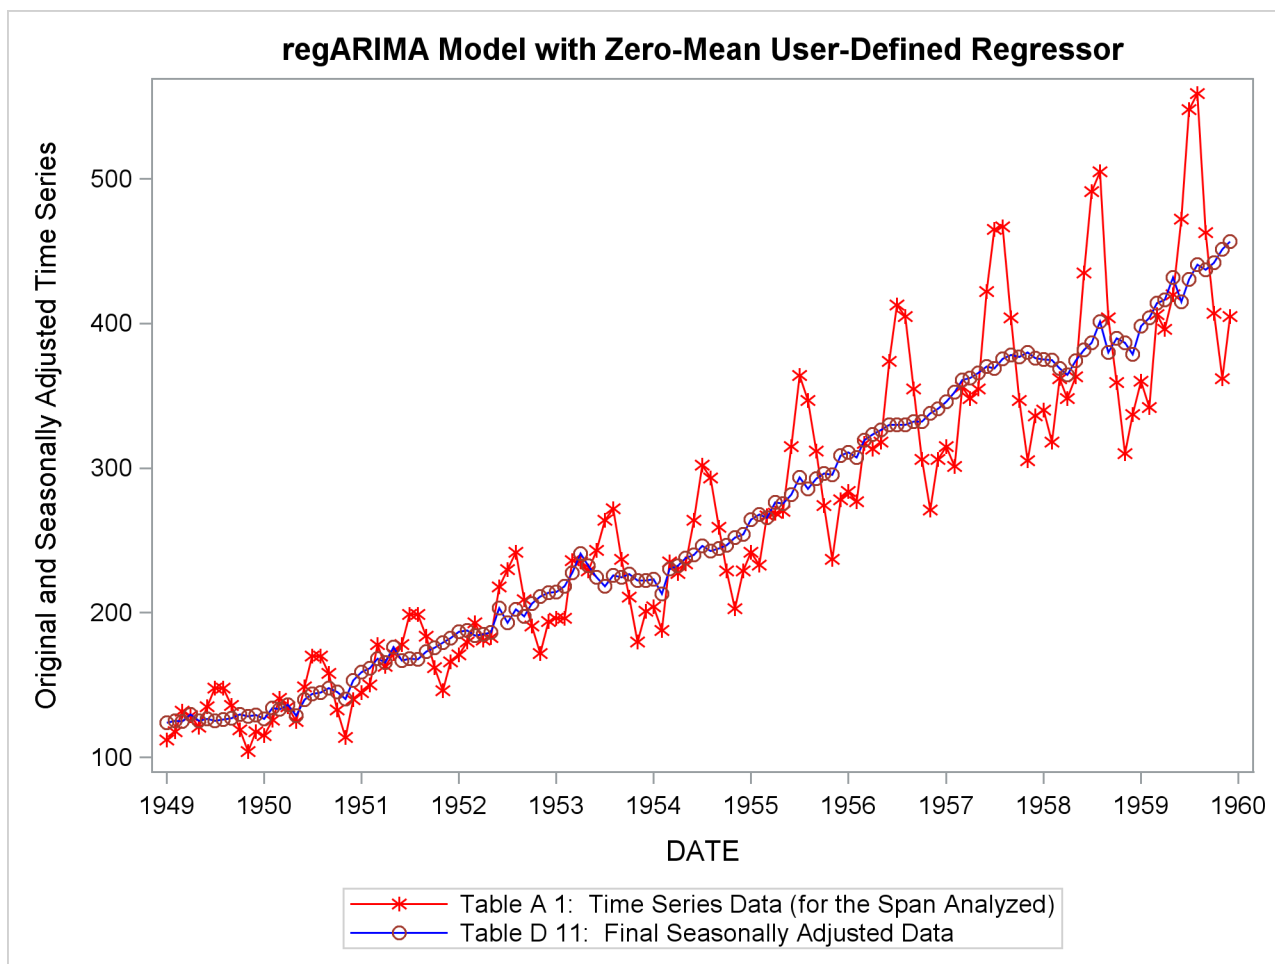
title 'regARIMA Model with Non-Zero-Mean User-Defined Regressor';
proc sgplot data=out;
  series x=date y=air_A1 / name = "A1" markers
          markerattrs=(color=red symbol='asterisk')
          lineattrs=(color=red);
  series x=date y=air_D11 / name= "D11" markers
          markerattrs=(symbol='circle')
          lineattrs=(color=blue);
  yaxis label='Original and Seasonally Adjusted Time Series';
run;

title 'regARIMA Model with Zero-Mean User-Defined Regressor';
proc sgplot data=outzm;
  series x=date y=air_A1 / name = "A1" markers
          markerattrs=(color=red symbol='asterisk')
          lineattrs=(color=red);
  series x=date y=air_D11 / name= "D11" markers
          markerattrs=(symbol='circle')
          lineattrs=(color=blue);
  yaxis label='Original and Seasonally Adjusted Time Series';
run;

```

The graph of the original and seasonally adjusted series in [Output 37.6.4](#) shows that the level of the seasonally adjusted series has been altered due to the user-defined regressor. The graph of the original and seasonally adjusted series in [Output 37.6.5](#) shows that the level of the seasonally adjusted series is the same as the original series since the user-defined regressor has zero-mean.

Output 37.6.4 Plot of Original and Seasonally Adjusted Data

Output 37.6.5 Plot of Original and Seasonally Adjusted Data (Zero-Mean Regressor)

When actual values are available for the forecast periods, information about forecast error is available in the output. [Output 37.6.6](#) shows the table “Forecasts and Standard Errors of the Transformed Data on the Original Scale” for a series with missing values in the forecast period. [Output 37.6.7](#) shows the table “Forecasts and Standard Errors of the Transformed Data on the Original Scale” for a series with actual values in the forecast period. Thus, it is more desirable to use SPAN= option to limit the span of a series if the actual values are available for the forecast period.

Output 37.6.6 PROC X12 Forecasts for Series Extended with Missing Values

Forecasts and Standard Errors of the Transformed Data				
On the Original scale				
For Variable AIR				
Date	Forecast	Standard Error	95% Confidence Limits	
JAN1960	419.600	14.85053	391.509	449.705
FEB1960	416.480	19.05188	380.826	455.472
MAR1960	466.697	22.66762	424.402	513.208
APR1960	454.468	24.53242	408.951	505.051
MAY1960	473.876	27.91366	422.353	531.684
JUN1960	547.601	34.74893	483.769	619.855
JUL1960	623.318	42.20549	546.139	711.405
AUG1960	631.731	45.30824	549.231	726.623
SEP1960	527.221	39.81839	455.011	610.890
OCT1960	462.774	36.63020	396.605	539.984
NOV1960	407.155	33.64286	346.608	478.277
DEC1960	452.702	38.91914	382.913	535.212

Output 37.6.7 PROC X12 Forecasts for Series with Actual Values in Forecast Periods

Forecasts and Standard Errors of the Transformed Data						
On the Original scale						
For Variable AIR						
Date	Data	Forecast	Forecast Error	Standard Error	t Value	95% Confidence Limits
JAN1960	417.000	419.600	-2.600	14.85053	-0.18	391.509 449.705
FEB1960	391.000	416.480	-25.480	19.05188	-1.34	380.826 455.472
MAR1960	419.000	466.697	-47.697	22.66762	-2.10	424.402 513.208
APR1960	461.000	454.468	6.532	24.53242	0.27	408.951 505.051
MAY1960	472.000	473.876	-1.876	27.91366	-0.07	422.353 531.684
JUN1960	535.000	547.601	-12.601	34.74893	-0.36	483.769 619.855
JUL1960	622.000	623.318	-1.318	42.20549	-0.03	546.139 711.405
AUG1960	606.000	631.731	-25.731	45.30824	-0.57	549.231 726.623
SEP1960	508.000	527.221	-19.221	39.81839	-0.48	455.011 610.890
OCT1960	461.000	462.774	-1.774	36.63020	-0.05	396.605 539.984
NOV1960	390.000	407.155	-17.155	33.64286	-0.51	346.608 478.277
DEC1960	432.000	452.702	-20.702	38.91914	-0.53	382.913 535.212

Example 37.7: MDLINFOIN= and MDLINFOOUT= Data Sets

This example illustrates the use of MDLINFOIN= and MDLINFOOUT= data sets. Using the data set shown, PROC X12 step identifies the model with outliers as displayed in [Output 37.7.1](#). [Output 37.7.2](#) shows the data set that represents the chosen model.

```

data b1;
  input y @@;
  datalines;
112 118 132 129
121 135 148 148
136 119 104 118
115 126 141 135
125 149 270 170
158 133 114 140
;

title 'Model Identification Output to MDLINFOOUT= Data Set';
proc x12 data=b1 start='1980q1' interval=qtr MdlInfoOut=mdl;
  automdl;
  outlier;
run ;

proc print data=mdl;
run;

```

Output 37.7.1 Displayed Model Identification with Outliers

Model Identification Output to MDLINFOOUT= Data Set

The X12 Procedure

Critical Values to use in Outlier Detection

For Variable y

Begin	1980Q1
End	1985Q4
Observations	24
Method	Add One
AO Critical Value	3.419415
LS Critical Value	3.419415

Final Automatic Model Selection

For Variable y

Source of Model	Estimated Model
Automatic Model Choice (2, 1, 0)	(0, 0, 0)

Regression Model Parameter Estimates

For Variable y

Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Automatically Identified	AO 1984Q3	Est	102.36589	5.96584	17.16	<.0001

Exact ARMA Maximum Likelihood Estimation

For Variable y

Parameter	Lag	Estimate	Standard Error	t Value	Pr > t
Nonseasonal AR	1	0.40892	0.20213	2.02	0.0554
	2	-0.53710	0.20975	-2.56	0.0178

Output 37.7.2 PROC X12 MDLINFOOUT= Data Set Model with Outlier Detection**Model Identification Output to MDLINFOOUT= Data Set**

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	y	REG	EVENT	SCALE	AO	AO01JUL1984D	.	.
2	y	ARIMA	FORECAST	NONSEASONAL DIF	y		.	.
3	y	ARIMA	FORECAST	NONSEASONAL AR	y		.	1
4	y	ARIMA	FORECAST	NONSEASONAL AR	y		.	1

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	102.366	5.96584	17.1587	0.000000	.		
2	1		
3	1	.	0	0.409	0.20213	2.0231	0.055385	.		
4	2	.	0	-0.537	0.20975	-2.5606	0.017830	.		

Suppose that after examining the output from the preceding example, you decide that an Easter regressor should be added to the model. The following statements create a data set with the model identified above and adds a U.S. Census Bureau Predefined Easter(25) regressor. The new model data set to be used as input in the MDLINFOIN= option is displayed in the data set shown in [Output 37.7.3](#).

```
data pluseaster;
  _NAME_ = 'y';
  _MODELTYPE_ = 'REG';
  _MODELPART_ = 'PREDEFINED';
  _COMPONENT_ = 'SCALE';
  _PARMTYPE_ = 'EASTER';
  _DSVAR_ = 'EASTER';
  _VALUE_ = 25;
run;

data mdlpluseaster;
  set mdl;
run;

proc append base=mdlpluseaster data=pluseaster force;
run;

proc print data=mdlpluseaster;
run;
```


Output 37.7.3 MDLINFOIN= Data Set Model with Easter(25) Regression Added**Model Identification Output to MDLINFOOUT= Data Set**

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	y	REG	EVENT	SCALE	AO	AO01JUL1984D	.	.
2	y	ARIMA	FORECAST	NONSEASONAL	DIF	y	.	.
3	y	ARIMA	FORECAST	NONSEASONAL	AR	y	.	1
4	y	ARIMA	FORECAST	NONSEASONAL	AR	y	.	1
5	y	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	102.366	5.96584	17.1587	0.000000	.	.	.
2	1
3	1	.	0	0.409	0.20213	2.0231	0.055385	.	.	.
4	2	.	0	-0.537	0.20975	-2.5606	0.017830	.	.	.
5

The following statements estimate the regression and ARIMA parameters by using the model described in the new data set mdlpluseaster. The results of estimating the new model are shown in [Output 37.7.4](#).

```
proc x12 data=b1 start='1980q1' interval=qtr
    MdlInfoIn=mdlpluseaster MdlInfoOut=mdl12;
    estimate;
run;
```

Output 37.7.4 Estimate Model with Added Easter(25) Regression**Model Identification Output to MDLINFOOUT= Data Set****The X12 Procedure**

Regression Model Parameter Estimates							
For Variable y							
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t	
Easter	Easter[25]	Est	6.15738	4.89162	1.26	0.2219	
User Defined	AO01JUL1984D	Est	105.29433	6.15636	17.10	<.0001	

Exact ARMA Maximum Likelihood Estimation							
For Variable y							
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t		
Nonseasonal AR	1	0.44376	0.20739	2.14	0.0443		
	2	-0.54050	0.21656	-2.50	0.0210		

The new model estimation results are displayed in the data set mdl2 shown in [Output 37.7.5](#).

```
proc print data=mdl2;
run;
```

Output 37.7.5 MDLINFOOUT= Data Set, Estimation of Model with Easter(25) Regression Added

Model Identification Output to MDLINFOOUT= Data Set

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	y	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.
2	y	REG	EVENT	SCALE	AO	AO01JUL1984D	.	.
3	y	ARIMA	FORECAST	NONSEASONAL	DIF	y	.	.
4	y	ARIMA	FORECAST	NONSEASONAL	AR	y	.	1
5	y	ARIMA	FORECAST	NONSEASONAL	AR	y	.	1

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	6.157	4.89162	1.2588	0.22193	.	.	.
2	.	.	0	105.294	6.15636	17.1033	0.00000	.	.	.
3	1
4	1	.	0	0.444	0.20739	2.1397	0.04428	.	.	.
5	2	.	0	-0.541	0.21656	-2.4959	0.02096	.	.	.

Example 37.8: Setting Regression Parameters

This example illustrates the use of fixed regression parameters in PROC X12. Suppose that you have the same data set as in the section “[Basic Seasonal Adjustment](#)” on page 2672. You can specify the following statements to use TRAMO to automatically identify a model that includes a U.S. Census Bureau Easter(25) regressor:

```
title 'Estimate Easter(25) Parameter';
proc x12 data=sales date=date MdlInfoOut=mdlout1;
  var sales;
  regression predefined=easter(25);
  automdl;
run ;
```

The displayed results are shown in [Output 37.8.1](#).

Output 37.8.1 Automatic Model ID with Easter(25) Regression

Estimate Easter(25) Parameter

The X12 Procedure

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
Easter	Easter[25]	Est	-5.09298	3.50786	-1.45	0.1489

Output 37.8.1 *continued*

Exact ARMA Maximum Likelihood Estimation						
For Variable sales						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal AR	1	0.62148	0.09279	6.70	<.0001	
	2	0.23354	0.10385	2.25	0.0262	
	3	-0.07191	0.09055	-0.79	0.4285	
Nonseasonal MA	1	0.97377	0.03771	25.82	<.0001	
Seasonal MA	12	0.10558	0.10205	1.03	0.3028	

The MDLINFOOUT= data set, mdlout1, that contains the model and parameter estimates is shown in [Output 37.8.2](#).

```
proc print data=mdlout1;
run;
```

Output 37.8.2 MDLINFOOUT= Data Set, Estimation of Automatic Model ID with Easter(25) Regression**Estimate Easter(25) Parameter**

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.
2	sales	ARIMA	FORECAST	NONSEASONAL DIF		sales	.	.
3	sales	ARIMA	FORECAST	SEASONAL DIF		sales	.	.
4	sales	ARIMA	FORECAST	NONSEASONAL AR		sales	.	1
5	sales	ARIMA	FORECAST	NONSEASONAL AR		sales	.	1
6	sales	ARIMA	FORECAST	NONSEASONAL AR		sales	.	1
7	sales	ARIMA	FORECAST	NONSEASONAL MA		sales	.	1
8	sales	ARIMA	FORECAST	SEASONAL MA		sales	.	2

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	-5.09298	3.50786	-1.4519	0.14894	.	.	.
2	1
3	1
4	1	.	0	0.62148	0.09279	6.6980	0.00000	.	.	.
5	2	.	0	0.23354	0.10385	2.2488	0.02621	.	.	.
6	3	.	0	-0.07191	0.09055	-0.7942	0.42851	.	.	.
7	1	.	0	0.97377	0.03771	25.8240	0.00000	.	.	.
8	1	.	0	0.10558	0.10205	1.0346	0.30277	.	.	.

To fix the Easter(25) parameter while adding a regressor that is weighted according to the number of Saturdays in a month, either use the REGRESSION and EVENT statements or create a MDLINFOIN= data set. The following statements show the method for using the REGRESSION statement to fix the EASTER parameter and the EVENT statement to add the SATURDAY regressor. The output is shown in [Output 37.8.3](#).

```

title 'Use SAS Statements to Alter Model';
proc x12 data=sales date=date MdlInfoOut=mdlout2grm;
  var sales;
  regression predefined=easter(25) / b=-5.029298 F;
  event Saturday;
  automdl;
run ;

```

Output 37.8.3 Automatic Model ID with Fixed Easter(25) and Saturday Regression

Use SAS Statements to Alter Model

The X12 Procedure

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	Saturday	Est	3.23225	1.16701	2.77	0.0064
Easter	Easter[25]	Fixed	-5.02930	.	.	.

Exact ARMA Maximum Likelihood Estimation						
For Variable sales						
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t	
Nonseasonal AR	1	-0.32506	0.08256	-3.94	0.0001	

To fix the EASTER regressor and add the new SATURDAY regressor by using a DATA step, you can create the data set mdlin2 as shown. The data set mdlin2 is displayed in [Output 37.8.4](#).

```

title 'Use a SAS DATA Step to Create a MdlInfoIn= Data Set';
data plusSaturday;
  _NAME_ = 'sales';
  _MODELTYPE_ = 'REG';
  _MODELPART_ = 'EVENT';
  _COMPONENT_ = 'SCALE';
  _PARMTYPE_ = 'USER';
  _DSVAR_ = 'SATURDAY';
run;

data mdlin2;
  set mdlout1;
  if ( _DSVAR_ = 'EASTER' ) then do;
    _NOEST_ = 1;
    _EST_ = -5.029298;
  end;
run;

proc append base=mdlout1 data=plusSaturday force;
run;

proc print data=mdlout1;
run;

```

Output 37.8.4 MDLINFOIN= Data Set, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model

Use a SAS DATA Step to Create a MdlInfoIn= Data Set

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.
2	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
3	sales	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
4	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
7	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
8	sales	ARIMA	FORECAST	SEASONAL	MA	sales	.	2
9	sales	REG	EVENT	SCALE	USER	SATURDAY	.	.

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	1	-5.02930	3.50786	-1.4519	0.14894	.	.	.
2	1
3	1
4	1	.	0	0.62148	0.09279	6.6980	0.00000	.	.	.
5	2	.	0	0.23354	0.10385	2.2488	0.02621	.	.	.
6	3	.	0	-0.07191	0.09055	-0.7942	0.42851	.	.	.
7	1	.	0	0.97377	0.03771	25.8240	0.00000	.	.	.
8	1	.	0	0.10558	0.10205	1.0346	0.30277	.	.	.
9

The data set mdlin2 can be used to replace the regression and model information contained in the REGRESSION, EVENT, and AUTOMDL statements. Note that the model specified in the mdlin2 data set is the same model as the automatically identified model. The following example uses the mdlin2 data set as input; the results are displayed in [Output 37.8.5](#).

```

title 'Use Updated Data Set to Alter Model';
proc x12 data=sales date=date MdlInfoIn=mdlinfo2 MdlInfoOut=mdlout2DS;
  var sales;
  estimate;
run ;

```

Output 37.8.5 Estimate MDLINFOIN= File for Model with Fixed Easter(25) and Saturday Regression, Previously Identified Model

Use Updated Data Set to Alter Model

The X12 Procedure

Regression Model Parameter Estimates							
For Variable sales							
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t	
User Defined	SATURDAY	Est	3.41762	1.07641	3.18	0.0019	
Easter	Easter[25]	Fixed	-5.02930	.	.	.	

Output 37.8.5 *continued*

Exact ARMA Maximum Likelihood Estimation					
For Variable sales					
Parameter	Lag	Estimate	Standard Error	t Value	Pr > t
Nonseasonal AR	1	0.62225	0.09175	6.78	<.0001
	2	0.30429	0.10109	3.01	0.0031
	3	-0.14862	0.08859	-1.68	0.0958
Nonseasonal MA	1	0.97125	0.03798	25.57	<.0001
Seasonal MA	12	0.11691	0.10000	1.17	0.2445

The following statements specify almost the same information as contained in the data set `mdlin2`. The ARIMA statement specifies the lags of the model. However, the initial AR and MA parameter values are the default. When using the `mdlin2` data set as input, the initial values can be specified. The results are displayed in [Output 37.8.6](#).

```

title 'Use SAS Statements to Alter Model';
proc x12 data=sales date=date MdlInfoOut=mdlout3grm;
  var sales;
  regression predefined=easter(25) / b=-5.029298 F;
  event Saturday;
  arima model=((3 1 1)(0 1 1));
  estimate;
run ;

proc print data=mdlout3grm;
run;

```

Output 37.8.6 MDLINFOOUT= Statement, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model

Use SAS Statements to Alter Model

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	REG	EVENT	SCALE	USER	Saturday	.	.
2	sales	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.
3	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
4	sales	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
7	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
8	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
9	sales	ARIMA	FORECAST	SEASONAL	MA	sales	.	2

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	3.41760	1.07640	3.1750	0.00187	.	.	.
2	.	.	1	-5.02930
3	1
4	1
5	1	.	0	0.62228	0.09175	6.7825	0.00000	.	.	.
6	2	.	0	0.30431	0.10109	3.0103	0.00314	.	.	.
7	3	.	0	-0.14864	0.08859	-1.6779	0.09579	.	.	.
8	1	.	0	0.97128	0.03796	25.5881	0.00000	.	.	.
9	1	.	0	0.11684	0.10000	1.1684	0.24481	.	.	.

The MDLINFOOUT= data set provides a method for comparing the results of the model identification. The data set mdlout3grm that results from using the MODEL= option in the ARIMA statement can be compared to the data set mdlout2DS that results from using the MDLINFOIN= data set with initial values for the AR and MA parameters. The mdlout2DS data set is shown in [Output 37.8.7](#), and the results of the comparison are shown in [Output 37.8.8](#). The slight difference in the estimated parameters can be attributed to the difference in the initial values for the AR and MA parameters.

```
proc print data=mdlout2DS;
run;
```

Output 37.8.7 MDLINFOOUT= Data Set, Fixed Easter(25) and Added Saturday Regression, Previously Identified Model**Use SAS Statements to Alter Model**

Obs	_NAME_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	REG	EVENT	SCALE	USER	SATURDAY	.	.
2	sales	REG	PREDEFINED	SCALE	EASTER	EASTER	25	.
3	sales	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
4	sales	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
5	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
6	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
7	sales	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
8	sales	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
9	sales	ARIMA	FORECAST	SEASONAL	MA	sales	.	2

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	.	.	0	3.41762	1.07641	3.1750	0.00187	.	.	.
2	.	.	1	-5.02930
3	1
4	1
5	1	.	0	0.62225	0.09175	6.7817	0.00000	.	.	.
6	2	.	0	0.30429	0.10109	3.0100	0.00314	.	.	.
7	3	.	0	-0.14862	0.08859	-1.6776	0.09584	.	.	.
8	1	.	0	0.97125	0.03798	25.5712	0.00000	.	.	.
9	1	.	0	0.11691	0.10000	1.1691	0.24451	.	.	.


```

title 'Compare Results of SAS Statement Input and MdlInfoIn= Input';
proc compare base= mdlout3grm compare=mdlout2DS;
var _EST_;
run ;

```

Output 37.8.8 Compare Parameter Estimates from Different MDLINFOOUT= Data Sets

Compare Results of SAS Statement Input and MdlInfoIn= Input

Value Comparison Results for Variables

Obs	Value of Parameter Estimate				
	Base _EST_	Compare _EST_	Diff.	% Diff	
1	3.4176	3.4176	0.0000225	0.000658	
5	0.6223	0.6222	-0.000033	-0.005237	
6	0.3043	0.3043	-0.000021	-0.006977	
7	-0.1486	-0.1486	0.0000235	-0.0158	
8	0.9713	0.9713	-0.000024	-0.002452	
9	0.1168	0.1169	0.0000759	0.0650	

Example 37.9: Creating an MDLINFO= Data Set for Use with the PICKMDL Statement

This example illustrates how you can create a data set for use in the [PICKMDL](#) statement that contains five commonly used ARIMA models:

- ARIMA (0 1 1)(0 1 1)s
- ARIMA (0 1 2)(0 1 1)s
- ARIMA (2 1 0)(0 1 1)s
- ARIMA (0 2 2)(0 1 1)s
- ARIMA (2 1 2)(0 1 1)s

The following macro code creates a MDLINFOIN= data set for a general ARIMA model:

```

%macro makemodel(name,p,d,q,sp,sd,sq,model);
  data "&name" (keep= _MODELTYPE_ _MODELPART_ _COMPONENT_
                     _DSVAR_ _PARMTYPE_ _FACTOR_ _LAG_
                     _LABEL_ );
    length _MODELTYPE_ _MODELPART_ _COMPONENT_ _DSVAR_

```

```

        _PARMTYPE_ $32;
length _FACTOR_ _LAG_ 8;
length _LABEL_ $32;

_MODELTYPE_="ARIMA";
_MODELPART_="FORECAST";
_DSVAR_=".";

_LABEL_="("||"&p"||" "||"&d"||" "||"&q"||") (||
        "&sp"||" "||"&sd"||" "||"&sq"||")s";

/* nonseasonal AR factors */
_COMPONENT_="NONSEASONAL";
_PARMTYPE_="AR";
_FACTOR_=1;
do _LAG_=1 to &p;
    output;
end;

/* seasonal AR factors */
_COMPONENT_="SEASONAL";
_PARMTYPE_="AR";
_FACTOR_=2;
do _LAG_=1 to &sp;
    output;
end;

/* nonseasonal MA factors */
_COMPONENT_="NONSEASONAL";
_PARMTYPE_="MA";
_FACTOR_=1;
do _LAG_=1 to &q;
    output;
end;

/* seasonal MA factors */
_COMPONENT_="SEASONAL";
_PARMTYPE_="MA";
_FACTOR_=2;
do _LAG_=1 to &sq;
    output;
end;

/* nonseasonal DIF */
_COMPONENT_="NONSEASONAL";
_PARMTYPE_="DIF";
_FACTOR_=1;
_LAG_=1;
do i_=1 to &d;
    output;
end;

/* seasonal DIF */
_COMPONENT_="SEASONAL";

```

```

    _PARMTYPE ="DIF";
    _FACTOR_ =2;
    _LAG_ =1;
    do i_ =1 to &sd;
        output;
    end;

run;
data sasuser.&name;
    length _MODEL_ $32;
    set "&name";
    _MODEL_ = "&model";
run;

%mend makemodel;

```

The following SAS statements use the macro to generate a data set with some commonly used models for use in the [PICKMDL](#) statement:

```

%makemodel(x12mdl1,0,1,1,0,1,1,Model1);
%makemodel(x12mdl2,0,1,2,0,1,1,Model2);
%makemodel(x12mdl3,2,1,0,0,1,1,Model3);
%makemodel(x12mdl4,0,2,2,0,1,1,Model4);
%makemodel(x12mdl5,2,1,2,0,1,1,Model5);

data Models;
    length _NAME_ $32;
    set sasuser.x12mdl1 sasuser.x12mdl2 sasuser.x12mdl3
        sasuser.x12mdl4 sasuser.x12mdl5;
    _NAME_ = 'sales';
run;

```

The Models data set is shown in [Output 37.9.1](#).

```

title '5 Commonly Used Models';
proc print data=Models;
run ;

```

Output 37.9.1 A Data Set That Contains Models for Use with the PICKMDL Statement**5 Commonly Used Models**

Obs	_NAME_	_MODEL_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_DSVAR_
1	sales	Model1	ARIMA	FORECAST	NONSEASONAL	.
2	sales	Model1	ARIMA	FORECAST	SEASONAL	.
3	sales	Model1	ARIMA	FORECAST	NONSEASONAL	.
4	sales	Model1	ARIMA	FORECAST	SEASONAL	.
5	sales	Model2	ARIMA	FORECAST	NONSEASONAL	.
6	sales	Model2	ARIMA	FORECAST	NONSEASONAL	.
7	sales	Model2	ARIMA	FORECAST	SEASONAL	.
8	sales	Model2	ARIMA	FORECAST	NONSEASONAL	.
9	sales	Model2	ARIMA	FORECAST	SEASONAL	.
10	sales	Model3	ARIMA	FORECAST	NONSEASONAL	.
11	sales	Model3	ARIMA	FORECAST	NONSEASONAL	.
12	sales	Model3	ARIMA	FORECAST	SEASONAL	.
13	sales	Model3	ARIMA	FORECAST	NONSEASONAL	.
14	sales	Model3	ARIMA	FORECAST	SEASONAL	.
15	sales	Model4	ARIMA	FORECAST	NONSEASONAL	.
16	sales	Model4	ARIMA	FORECAST	NONSEASONAL	.
17	sales	Model4	ARIMA	FORECAST	SEASONAL	.
18	sales	Model4	ARIMA	FORECAST	NONSEASONAL	.
19	sales	Model4	ARIMA	FORECAST	NONSEASONAL	.
20	sales	Model4	ARIMA	FORECAST	SEASONAL	.
21	sales	Model5	ARIMA	FORECAST	NONSEASONAL	.
22	sales	Model5	ARIMA	FORECAST	NONSEASONAL	.

Obs	_PARMTYPE_	_FACTOR_	_LAG_	_LABEL_
1	MA	1	1	(0 1 1)(0 1 1)s
2	MA	2	1	(0 1 1)(0 1 1)s
3	DIF	1	1	(0 1 1)(0 1 1)s
4	DIF	2	1	(0 1 1)(0 1 1)s
5	MA	1	1	(0 1 2)(0 1 1)s
6	MA	1	2	(0 1 2)(0 1 1)s
7	MA	2	1	(0 1 2)(0 1 1)s
8	DIF	1	1	(0 1 2)(0 1 1)s
9	DIF	2	1	(0 1 2)(0 1 1)s
10	AR	1	1	(2 1 0)(0 1 1)s
11	AR	1	2	(2 1 0)(0 1 1)s
12	MA	2	1	(2 1 0)(0 1 1)s
13	DIF	1	1	(2 1 0)(0 1 1)s
14	DIF	2	1	(2 1 0)(0 1 1)s
15	MA	1	1	(0 2 2)(0 1 1)s
16	MA	1	2	(0 2 2)(0 1 1)s
17	MA	2	1	(0 2 2)(0 1 1)s
18	DIF	1	1	(0 2 2)(0 1 1)s
19	DIF	1	1	(0 2 2)(0 1 1)s
20	DIF	2	1	(0 2 2)(0 1 1)s
21	AR	1	1	(2 1 2)(0 1 1)s
22	AR	1	2	(2 1 2)(0 1 1)s

Output 37.9.1 *continued*
5 Commonly Used Models

Obs	_NAME_	_MODEL_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_DSVAR_
23	sales	Model5	ARIMA	FORECAST	NONSEASONAL	.
24	sales	Model5	ARIMA	FORECAST	NONSEASONAL	.
25	sales	Model5	ARIMA	FORECAST	SEASONAL	.
26	sales	Model5	ARIMA	FORECAST	NONSEASONAL	.
27	sales	Model5	ARIMA	FORECAST	SEASONAL	.

Obs	_PARMTYPE_	_FACTOR_	_LAG_	_LABEL_
23	MA	1	1	(2 1 2)(0 1 1)s
24	MA	1	2	(2 1 2)(0 1 1)s
25	MA	2	1	(2 1 2)(0 1 1)s
26	DIF	1	1	(2 1 2)(0 1 1)s
27	DIF	2	1	(2 1 2)(0 1 1)s

The following statements specify that the PICKMDL method be used to choose a model from the list of models that are defined in the Models data set. The default METHOD=FIRST option is used to select the model. The chosen model is shown in the mdlchosen data set in [Output 37.9.2](#).

```
proc x12 data=sales date=date mdlinfoin=Models mdlinfoout=mdlchosen;
  var sales;
  transform function=log;
  pickmdl method=first;
run;

title 'Chosen Model';
proc print data=mdlchosen;
run ;
```

Output 37.9.2 The Model Chosen from the Five Commonly Used Models

Chosen Model

Obs	_NAME_	_MODEL_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	MODEL1	ARIMA	FORECAST	TRANSFORM	LOG	sales	.	.
2	sales	MODEL1	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
3	sales	MODEL1	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
4	sales	MODEL1	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
5	sales	MODEL1	ARIMA	FORECAST	SEASONAL	MA	sales	.	2

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	(0 1 1)(0 1 1)s
2	1	(0 1 1)(0 1 1)s
3	1	(0 1 1)(0 1 1)s
4	1	.	0	0.40181	0.078870	5.09458	.000001192	.	.	(0 1 1)(0 1 1)s
5	1	.	0	0.55695	0.076255	7.30369	2.4359E-11	.	.	(0 1 1)(0 1 1)s

The following statements reverse the order of the models in the input data set. The default METHOD=FIRST option is used to select the model. The chosen model is shown in the mdlchosen data set in [Output 37.9.3](#).

With METHOD=FIRST, a different model is chosen because the order is changed.

```
data Models;
  length _NAME_ $32;
  set sasuser.x12mdl5 sasuser.x12mdl4 sasuser.x12mdl3
      sasuser.x12mdl2 sasuser.x12mdl1 ;
  _NAME_ = 'sales';
run;

proc x12 data=sales date=date mdlinfoin=Models mdlinfoout=mdlchosen;
  var sales;
  transform function=log;
  pickmdl method=first;
run;

title 'Chosen Model';
proc print data=mdlchosen;
run ;
```

Output 37.9.3 The Model Chosen from the Five Commonly Used Models, Reversed Order

Chosen Model

Obs	_NAME_	_MODEL_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	MODEL3	ARIMA	FORECAST	TRANSFORM	LOG	sales	.	.
2	sales	MODEL3	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
3	sales	MODEL3	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
4	sales	MODEL3	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
5	sales	MODEL3	ARIMA	FORECAST	NONSEASONAL	AR	sales	.	1
6	sales	MODEL3	ARIMA	FORECAST	SEASONAL	MA	sales	.	1

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	(2 1 0)(0 1 1)s	
2	1	(2 1 0)(0 1 1)s	
3	1	(2 1 0)(0 1 1)s	
4	1	.	0	-0.36159	0.086055	-4.20188	0.00005	.	(2 1 0)(0 1 1)s	
5	2	.	0	-0.06366	0.086141	-0.73905	0.46120	.	(2 1 0)(0 1 1)s	
6	1	.	0	0.56109	0.072814	7.70588	0.00000	.	(2 1 0)(0 1 1)s	

The following example shows the use of PICKMDL statement option METHOD=BEST to select the model. The chosen model is shown in the mdlchosen data set in Output 37.9.4. With METHOD=BEST, a different model is chosen than either of the previous models chosen. Because the order in which the models occur in the MDLINFOIN= data set affects model selection when METHOD=FIRST is specified, it is a common practice to list models from the simplest model to the most complex in the MDLINFOIN= data set that is used in conjunction with the PICKMDL statement.

```
proc x12 data=sales date=date mdlinfoin=Models mdlinfoout=mdlchosen;
  var sales;
  transform function=log;
  pickmdl method=best;
run;
```

```

title 'Chosen Model';
proc print data=mdlchosen;
run ;

```

Output 37.9.4 The Model Chosen from the Five Commonly Used Models, METHOD=BEST

Chosen Model

Obs	_NAME_	_MODEL_	_MODELTYPE_	_MODELPART_	_COMPONENT_	_PARMTYPE_	_DSVAR_	_VALUE_	_FACTOR_
1	sales	MODEL2	ARIMA	FORECAST	TRANSFORM	LOG	sales	.	.
2	sales	MODEL2	ARIMA	FORECAST	NONSEASONAL	DIF	sales	.	.
3	sales	MODEL2	ARIMA	FORECAST	SEASONAL	DIF	sales	.	.
4	sales	MODEL2	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
5	sales	MODEL2	ARIMA	FORECAST	NONSEASONAL	MA	sales	.	1
6	sales	MODEL2	ARIMA	FORECAST	SEASONAL	MA	sales	.	2

Obs	_LAG_	_SHIFT_	_NOEST_	_EST_	_STDERR_	_TVALUE_	_PVALUE_	_STATUS_	_SCORE_	_LABEL_
1	(0 1 2)(0 1 1)s	
2	1	(0 1 2)(0 1 1)s	
3	1	(0 1 2)(0 1 1)s	
4	1	.	0	0.39613	0.086126	4.59937	0.00001	.	(0 1 2)(0 1 1)s	
5	2	.	0	0.03961	0.086163	0.45966	0.64652	.	(0 1 2)(0 1 1)s	
6	1	.	0	0.55903	0.076446	7.31277	0.00000	.	(0 1 2)(0 1 1)s	

Example 37.10: Illustration of ODS Graphics

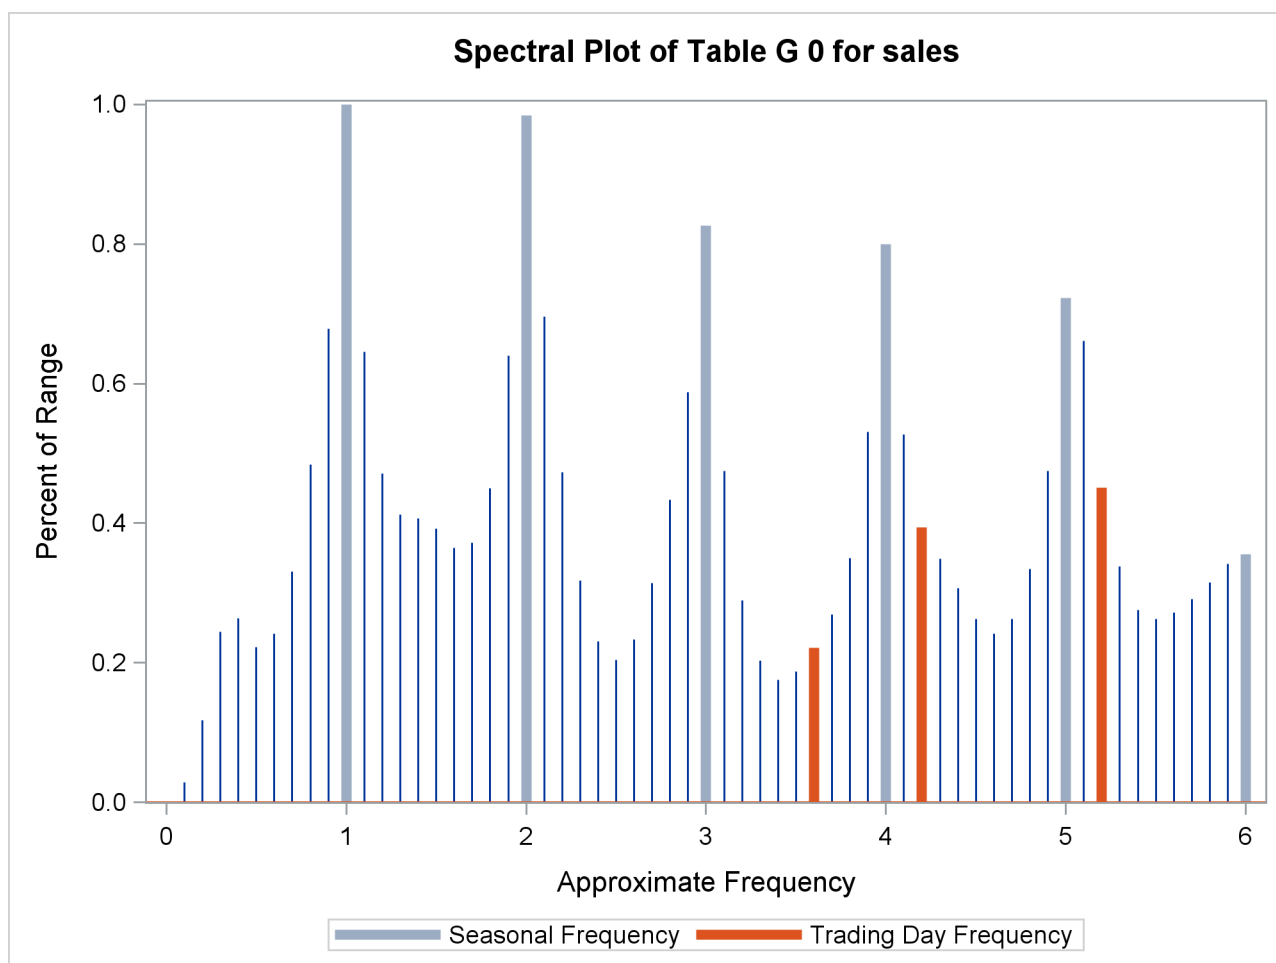
This example illustrates the use of ODS Graphics. Using the same data set as in the section “[Basic Seasonal Adjustment](#)” on page 2672 and the previous examples, a spectral plot of the original series is displayed in [Output 37.10.1](#).

The graphical displays are available when ODS Graphics is enabled. For specific information about the graphics available in the X12 procedure, see the section “[ODS Graphics](#)” on page 2733.

```

proc x12 data=sales date=date;
    var sales;
run;

```

Output 37.10.1 Spectral Plot for Original Data

Example 37.11: AUXDATA= Data Set

This example demonstrates the use of the AUXDATA= data set to input user-defined regressors for use in the regARIMA model. User-defined regressors are often economic indicators, but in this example a user-defined regressor is generated in the following statements:

```
data auxreg(keep=date lengthofmonth);
  set sales;
  lengthofmonth = (INTNX('MONTH',date,1) - date) - (365/12);
  format date monyy.;
run;
```

When you use the AUXDATA= data set, it is not necessary to merge the user-defined regressor data set with the DATA= data set. The following statements input the regressor lengthofmonth in the data set auxreg. The regressor lengthofmonth is specified in the REGRESSION statement, and the data set auxreg is specified in the AUXDATA= option in the PROC X12 statement.


```

title 'Align lengthofmonth Regressor from Auxreg to First Three Years';
ods select regParameterEstimates;
proc x12 data=sales(obs=36) date=date auxdata=auxreg;
  var sales;
  regression uservar=lengthofmonth;
  arima model=((0 1 1) (0 1 1));
  estimate;
run;

title 'Align lengthofmonth Regressor from Auxreg to Second Three Years';
ods select regParameterEstimates;
proc x12 data=sales(firstobs=37 obs=72) date=date auxdata=auxreg;
  var sales;
  regression uservar=lengthofmonth;
  arima model=((0 1 1) (0 1 1));
  estimate;
run;

```

Output 37.11.1 and Output 37.11.2 display the parameter estimates for the two series.

Output 37.11.1 Using Regressors in the AUXDATA= Data for the First Three Years of Series

Align lengthofmonth Regressor from Auxreg to First Three Years

The X12 Procedure

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	2.98046	5.36251	0.56	0.5840

Output 37.11.2 Using Regressors in the AUXDATA= Data for the Second Three Years of Series

Align lengthofmonth Regressor from Auxreg to Second Three Years

The X12 Procedure

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	-0.51215	8.43145	-0.06	0.9521

The X12 procedure uses the date variable in the sales data set and the auxreg data set to align the user-defined regressors.

In the following example, the DATA= data set salesby contains BY groups. The X12 procedure aligns the regressor in the auxreg data set to each BY group in the salesby data set according to the variable date that is specified by the DATE= option in the PROC X12 statement. The variable date must be present in the auxreg data set to align the values.

```

data salesby;
    set sales(obs=72);
    if ( _n_ < 37 ) then by=1;
    else by=2;
run;
ods select regParameterEstimates;
title 'Align lengthofmonth Regressor from Auxreg to BY Groups';
proc x12 data=salesby date=date auxdata=auxreg;
    var sales;
    by by;
    regression uservar=lengthofmonth;
    arima model=((0 1 1) (0 1 1));
    estimate;
run;

```

The results in [Output 37.11.3](#) match the previous results in [Output 37.11.1](#) and [Output 37.11.2](#).

Output 37.11.3 Using Regressors in the AUXDATA= Data with BY Groups

Align lengthofmonth Regressor from Auxreg to BY Groups

The X12 Procedure

by=1

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	2.98046	5.36251	0.56	0.5840

Align lengthofmonth Regressor from Auxreg to BY Groups

The X12 Procedure

by=2

Regression Model Parameter Estimates						
For Variable sales						
Type	Parameter	NoEst	Estimate	Standard Error	t Value	Pr > t
User Defined	lengthofmonth	Est	-0.51215	8.43145	-0.06	0.9521

References

- Box, G. E. P., Jenkins, G. M., and Reinsel, G. C. (1994), *Time Series Analysis: Forecasting and Control*, 3rd Edition, Englewood Cliffs, NJ: Prentice-Hall.
- Cholette, P. A. (1979), *A Comparison and Assessment of Various Adjustment Methods of Sub-annual Series to Yearly Benchmarks*, StatCan Staff Paper STC2119, Seasonal Adjustment and Time Series Staff, Statistics Canada, Ottawa.
- Dagum, E. B. (1983), *The X-11-ARIMA Seasonal Adjustment Method*, Technical Report 12-564E, Statistics Canada, Ottawa.
- Dagum, E. B. (1988), *The X-11-ARIMA/88 Seasonal Adjustment Method: Foundations and User's Manual*, Ottawa: Statistics Canada.
- Findley, D. F., Monsell, B. C., Bell, W. R., Otto, M. C., and Chen, B. C. (1998), "New Capabilities and Methods of the X-12-ARIMA Seasonal Adjustment Program," *Journal of Business and Economic Statistics*, 16, 127–176.
- Gómez, V. and Maravall, A. (1997a), *Guide for Using the Programs TRAMO and SEATS, Beta Version*, Madrid: Banco de España.
- Gómez, V. and Maravall, A. (1997b), *Programs TRAMO and SEATS: Instructions for the User, Beta Version*, Madrid: Banco de España.
- Huot, G. (1975), *Quadratic Minimization Adjustment of Monthly or Quarterly Series to Annual Totals*, StatCan Staff Paper STC2104, Statistics Canada, Seasonal Adjustment and Time Series Staff, Ottawa.
- Ladiray, D. and Quenneville, B. (2001), *Seasonal Adjustment with the X-11 Method*, New York: Springer-Verlag.
- Ljung, G. M. (1993), "On Outlier Detection in Time Series," *Journal of the Royal Statistical Society, Series B*, 55, 559–567.
- Lothian, J. and Morry, M. (1978a), *A Set of Quality Control Statistics for the X-11-ARIMA Seasonal Adjustment Method*, StatCan Staff Paper STC1788E, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Lothian, J. and Morry, M. (1978b), *A Test for the Presence of Identifiable Seasonality When Using the X-11-ARIMA Program*, StatCan Staff Paper STC2118, Seasonal Adjustment and Time Series Analysis Staff, Statistics Canada, Ottawa.
- Shiskin, J., Young, A. H., and Musgrave, J. C. (1967), *The X-11 Variant of the Census Method II Seasonal Adjustment Program*, Technical Report 15, U.S. Department of Commerce, Bureau of the Census.
- U.S. Bureau of the Census (2009a), *X-12-ARIMA Quick Reference for UNIX/Linux, Version 0.3*, U.S. Bureau of the Census, Washington, DC.
 URL <http://www.census.gov/ts/x12a/v03/unix/qref03unix.pdf>

U.S. Bureau of the Census (2009b), *X-12-ARIMA Quick Reference for Windows (PC), Version 0.3*, U.S. Bureau of the Census, Washington, DC.

URL <http://www.census.gov/ts/x12a/v03/pc/qref03pc.pdf>

U.S. Bureau of the Census (2009c), *X-12-ARIMA Reference Manual, Version 0.3*, U.S. Bureau of the Census, Washington, DC.

URL <http://www.census.gov/ts/x12a/v03/x12adocV03.pdf>

U.S. Bureau of the Census (2010), *X-12-ARIMA Seasonal Adjustment Program, Version 0.3*, U.S. Bureau of the Census, Washington, DC.

URL <http://www.census.gov/srd/www/x12a/>

U.S. Bureau of the Census (2013), *X-13ARIMA-SEATS Reference Manual, Version 1.1*, U.S. Bureau of the Census, Washington, DC.

URL <http://www.census.gov/ts/x13as/docX13ASHTML.pdf>

Subject Index

- BY groups
 - X12 procedure, [2690](#)
- Census X-12 method, *see* X12 procedure
- combined seasonality test, [2726](#)
- data requirements
 - X12 procedure, [2720](#)
- ID variables
 - X12 procedure, [2696](#)
- INPUT variables
 - X12 procedure, [2698](#)
- ODS graph names
 - X12 procedure, [2734](#)
- ODS Graphics
 - X12 procedure, [2681](#)
- seasonal adjustment
 - time series data, [2671](#)
 - X12 procedure, [2671](#)
- seasonal component
 - X12 procedure, [2671](#)
- time series data
 - seasonal adjustment, [2671](#)
- user-defined regression variables, [2725](#)
- X-12 seasonal adjustment method, *see* X12 procedure
- X-12-ARIMA seasonal adjustment method, *see* X12 procedure
- X12 procedure
 - BY groups, [2690](#)
 - Census X-12 method, [2670](#)
 - data requirements, [2720](#)
 - ID variables, [2696](#)
 - INPUT variables, [2698](#)
 - ODS graph names, [2734](#)
 - ODS Graphics, [2681](#)
 - seasonal adjustment, [2671](#)
 - seasonal component, [2671](#)
 - X-12 seasonal adjustment method, [2670](#)
 - X-12-ARIMA seasonal adjustment method, [2670](#)

Syntax Index

- ACCEPTDEFAULT option
 - AUTOMDL statement (X12), 2688
- ADJUST statement
 - X12 procedure, 2686
- AICTEST= option
 - REGRESSION statement (X12), 2705
- ALMOST= option
 - OUTLIER statement (X12), 2700
- ALPHA= option
 - FORECAST statement (X12), 2695
 - OUTLIER statement (X12), 2700
- AOCV= option
 - OUTLIER statement (X12), 2700
- ARIMA statement
 - X12 procedure, 2687
- ARMACV= option
 - AUTOMDL statement (X12), 2688
- AUTOMDL statement
 - X12 procedure, 2687
- AUXDATA= option
 - PROC X12 statement, 2680
- BALANCED option
 - AUTOMDL statement (X12), 2689
- BY statement
 - X12 procedure, 2690
- CHECK statement
 - X12 procedure, 2691
- CV= option
 - OUTLIER statement (X12), 2700
- CVMETHOD= option
 - OUTLIER statement (X12), 2701
- DATA= option
 - PROC X12 statement, 2680
- DATE= option
 - PROC X12 statement, 2680
- DIFF= option
 - IDENTIFY statement (X12), 2697
- DIFFORDER= option
 - AUTOMDL statement (X12), 2689
- ESTIMATE statement
 - X12 procedure, 2692
- EVENT statement
 - X12 procedure, 2693
- FINAL= option
 - X11 statement (X12), 2717
- FORCE= option
 - X11 statement (X12), 2717
- FORECAST statement
 - X12 procedure, 2695
- FUNCTION= option
 - TRANSFORM statement (X12), 2714
- HRINITIAL option
 - AUTOMDL statement (X12), 2689
- ID statement
 - X12 procedure, 2696
- IDENTIFY statement
 - X12 procedure, 2696
- INEVENT= option
 - PROC X12 statement, 2680
- INPUT statement
 - X12 procedure, 2698
- INTERVAL= option
 - PROC X12 statement, 2680
- ITPRINT option
 - ESTIMATE statement (X12), 2692
- LEAD= option
 - FORECAST statement (X12), 2695
 - SEATSDECOMP statement (X12), 2712
- LJUNGBOXLIMIT= option
 - AUTOMDL statement (X12), 2689
- LSCV= option
 - OUTLIER statement (X12), 2701
- LSRUN= option
 - OUTLIER statement (X12), 2701
- MAXDIFF= option
 - AUTOMDL statement (X12), 2689
- MAXITER= option
 - ESTIMATE statement (X12), 2692
- MAXLAG= option
 - CHECK statement (X12), 2691
 - IDENTIFY statement (X12), 2697
- MAXORDER= option
 - AUTOMDL statement (X12), 2689
- MDLINFOIN= option
 - PROC X12 statement, 2681
- MDLINFOOUT= option
 - PROC X12 statement, 2681
- MDLVAR= option
 - PICKMDL statement (X12), 2703

METHOD= option
 OUTLIER statement (X12), 2701
 PICKMDL statement (X12), 2703
MODE= option
 X11 statement (X12), 2717
MODEL= option
 ARIMA statement (X12), 2687

NBACKCAST= option
 FORECAST statement (X12), 2696
 SEATSDECOMP statement (X12), 2712
NOAPPLY= option
 REGRESSION statement (X12), 2705
NOINT option
 AUTOMDL statement (X12), 2689
NOSUM
 TABLES statement (X12), 2713

OUT1STEP option
 FORECAST statement (X12), 2696
OUT= option
 OUTPUT statement (X12), 2702
 SEATSDECOMP statement (X12), 2712
OUT= table names
 OUTPUT statement (X12), 2703
OUTBACKCAST option
 FORECAST statement (X12), 2696
OUTFORECAST option
 FORECAST statement (X12), 2696
 X11 statement (X12), 2717
OUTLIER statement
 X12 procedure, 2699
OUTPUT statement
 X12 procedure, 2702
OUTSTAT= option
 PROC X12 statement, 2681

PERIODOGRAM option
 PROC X12 statement, 2681
PICKMDL statement
 X12 procedure, 2703
PLOT option
 PROC X12 statement, 2681
PLOTS option
 PROC X12 statement, 2681
POWER= option
 TRANSFORM statement (X12), 2713
PREDEFINED= option
 ADJUST statement (X12), 2686
 PREDEFINED statement (X12), 2706
PRINT= option
 AUTOMDL statement (X12), 2689
 CHECK statement (X12), 2691
PRINTERR option
 ESTIMATE statement (X12), 2693

PRINTREG option
 IDENTIFY statement (X12), 2697
PROC X12 statement, 2679

REDUCECV= option
 AUTOMDL statement (X12), 2690
REGRESSION statement
 X12 procedure, 2704

SDIFF= option
 IDENTIFY statement (X12), 2697
SEASONALMA= option
 X11 statement (X12), 2718
SEASONS= option
 PROC X12 statement, 2685
SEATSDECOMP statement
 X12 procedure, 2711
SIGMALIM= option
 X11 statement (X12), 2718
SPAN= option
 OUTLIER statement (X12), 2702
 PROC X12 statement, 2686
SPECTRUMSERIES= option
 PROC X12 statement, 2686
START= option
 PROC X12 statement, 2686

TABLES statement
 X12 procedure, 2713
TABLES table names
 TABLES statement (X12), 2713
TCCV= option
 OUTLIER statement (X12), 2702
TCRATE= option
 OUTLIER statement (X12), 2702
TOL= option
 ESTIMATE statement (X12), 2693
TRANSFORM statement
 X12 procedure, 2713
TRENDMA= option
 X11 statement (X12), 2719
TYPE= option
 OUTLIER statement (X12), 2702
 X11 statement (X12), 2719

USERDEFINED statement
 X12 procedure, 2715

VAR statement
 X12 procedure, 2715

X11 statement
 X12 procedure, 2715
X12 procedure, 2675
 syntax, 2675

X12 procedure, PROC X12 statement
PLOT option, [2681](#)

YEARSEAS option
OUTPUT statement (X12), [2702](#)
SEATSDECOMP statement (X12), [2712](#)