

SAS/STAT[®] 13.1 User's Guide

The SIMNORMAL Procedure

This document is an individual chapter from *SAS/STAT® 13.1 User's Guide*.

The correct bibliographic citation for the complete manual is as follows: SAS Institute Inc. 2013. *SAS/STAT® 13.1 User's Guide*. Cary, NC: SAS Institute Inc.

Copyright © 2013, SAS Institute Inc., Cary, NC, USA

All rights reserved. Produced in the United States of America.

For a hard-copy book: No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

For a web download or e-book: Your use of this publication shall be governed by the terms established by the vendor at the time you acquire this publication.

The scanning, uploading, and distribution of this book via the Internet or any other means without the permission of the publisher is illegal and punishable by law. Please purchase only authorized electronic editions and do not participate in or encourage electronic piracy of copyrighted materials. Your support of others' rights is appreciated.

U.S. Government License Rights; Restricted Rights: The Software and its documentation is commercial computer software developed at private expense and is provided with RESTRICTED RIGHTS to the United States Government. Use, duplication or disclosure of the Software by the United States Government is subject to the license terms of this Agreement pursuant to, as applicable, FAR 12.212, DFAR 227.7202-1(a), DFAR 227.7202-3(a) and DFAR 227.7202-4 and, to the extent required under U.S. federal law, the minimum restricted rights as set out in FAR 52.227-19 (DEC 2007). If FAR 52.227-19 is applicable, this provision serves as notice under clause (c) thereof and no other notice is required to be affixed to the Software or documentation. The Government's rights in Software and documentation shall be only those set forth in this Agreement.


SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513-2414.

December 2013

SAS provides a complete selection of books and electronic products to help customers use SAS® software to its fullest potential. For more information about our offerings, visit support.sas.com/bookstore or call 1-800-727-3228.

SAS® and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration.

Other brand and product names are trademarks of their respective companies.

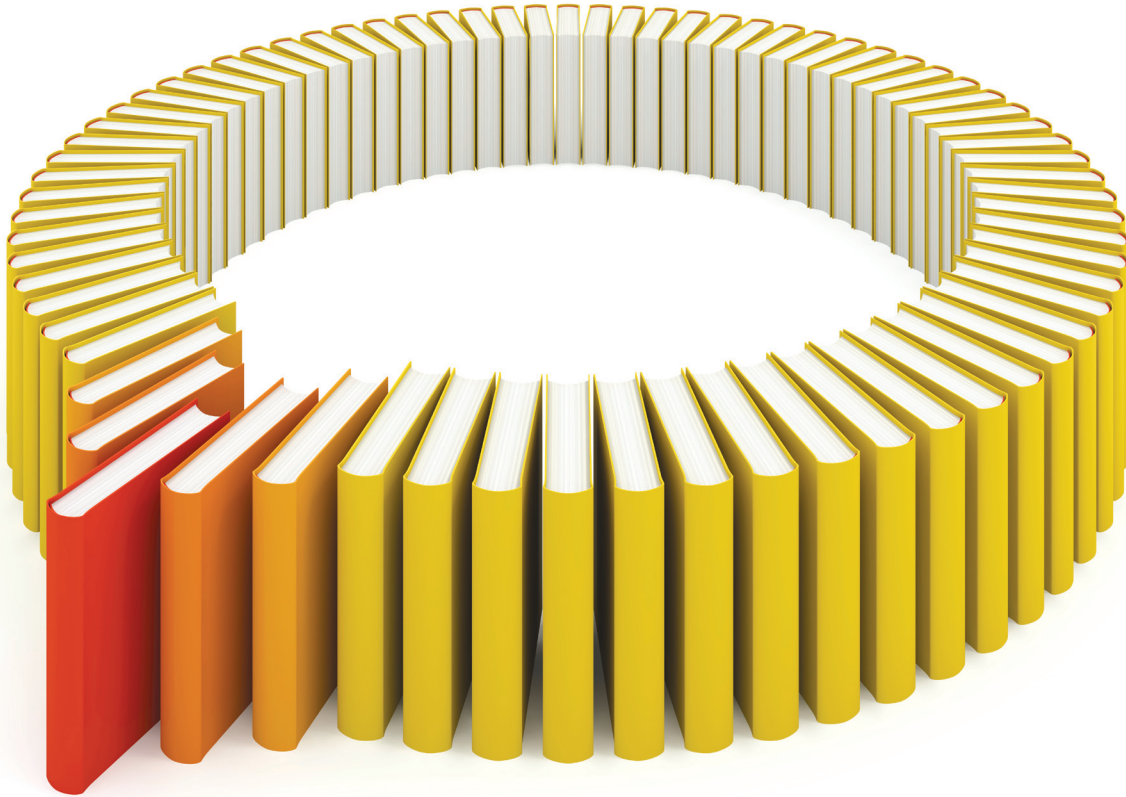

Gain Greater Insight into Your SAS[®] Software with SAS Books.

Discover all that you need on your journey to knowledge and empowerment.

 support.sas.com/bookstore
for additional books and resources.


THE POWER TO KNOW[®]

SAS and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. ® indicates USA registration. Other brand and product names are trademarks of their respective companies. © 2013 SAS Institute Inc. All rights reserved. S107969US.0613

Chapter 90

The SIMNORMAL Procedure

Contents

Overview: SIMNORMAL Procedure	7837
Getting Started: SIMNORMAL Procedure	7837
Syntax: SIMNORMAL Procedure	7839
PROC SIMNORMAL Statement	7839
BY Statement	7841
CONDITION Statement	7841
VAR Statement	7841
OUT= Output Data Set	7841
Details: SIMNORMAL Procedure	7842
Introduction	7842
Unconditional Simulation	7842
Conditional Simulation	7843
Example: SIMNORM Procedure	7845
References	7852

Overview: SIMNORMAL Procedure

The SIMNORMAL procedure can perform conditional and unconditional simulation for a set of correlated normal or Gaussian random variables.

The means, variances, and covariances (or correlations) are read from an input TYPE=CORR or TYPE=COV data set. This data set is typically produced by the CORR procedure. Conditional simulations are performed by appending a special observation, identified by the value of 'COND' for the _TYPE_ variable, which contains the conditioning value.

The output data set from PROC SIMNORMAL contains simulated values for each of the analysis variables. Optionally, the output data set also contains the seed stream and the values of the conditioning variables. PROC SIMNORMAL produces no printed output.

Getting Started: SIMNORMAL Procedure

The following example illustrates the use of PROC SIMNORMAL to generate two normal random variates that have specified means and covariance.

In this example, the means and covariances are given; these might have come from previous experiments, observational studies, or other considerations.

First you create a `_TYPE_=COV` data set as the input data set, and then you run PROC SIMNORM with `NUMREAL=5000`, creating a sample that contains 5,000 observations. The simple statistics of this sample are checked using PROC CORR. The results are shown in Figure 90.1.

```
data scov(type=COV) ;
    input _TYPE_ $ 1-4 _NAME_ $ 9-10 S1 S2 ;
    datalines ;
COV      S1      1.915  0.3873
COV      S2      0.3873 4.321
MEAN                    1.305  2.003
run;

proc simnorm data=scov outsim=ssim
    numreal = 5000
    seed = 54321 ;
    var s1 s2 ;
run;

proc corr data=ssim cov ;
    var s1 s2 ;
    title "Statistics for PROC SIMNORM Sample Using NUMREAL=5000" ;
run;
```

Figure 90.1 Statistics for PROC SIMNORM Sample Using NUMREAL=5000

Statistics for PROC SIMNORM Sample Using NUMREAL=5000						
The CORR Procedure						
2 Variables:		S1	S2			
Covariance Matrix, DF = 4999						
		S1	S2			
S1		1.895805499	0.424837163			
S2		0.424837163	4.132974275			
Simple Statistics						
Variable	N	Mean	Std Dev	Sum	Minimum	Maximum
S1	5000	1.30254	1.37688	6513	-3.90682	6.49864
S2	5000	1.98790	2.03297	9940	-5.69812	9.42833

Syntax: SIMNORMAL Procedure

The following statements are available in the SIMNORMAL procedure:

```
PROC SIMNORMAL DATA=SAS-data-set < options > ;
VAR variables ;
BY variables ;
CONDITION variables ;
```

Both the PROC SIMNORMAL and VAR statements are required. The following sections describe the PROC SIMNORMAL statement and then describe the other statements in alphabetical order.

PROC SIMNORMAL Statement

```
PROC SIMNORMAL DATA=SAS-data-set < options > ;
```

The PROC SIMNORMAL statement invokes the SIMNORMAL procedure. [Table 90.1](#) summarizes the options available in the PROC SIMNORMAL statement.

Table 90.1 Summary of PROC SIMNORMAL Statement Options

Option	Description
Specify Input and Output Data Sets	
DATA=	Specifies input data set (TYPE=CORR, COV, and so on)
OUT=	Creates output data set that contains simulated values
Seed Values	
SEED=	Specifies seed value (integer)
SEEDBY	Requests reinitialization of seed for each BY group
Control Contents of OUT= Data Set	
OUTSEED	Requests seed values written to OUT= data set
OUTCOND	Requests conditioning variable values written to OUT=data set
Control Number of Simulated Values	
NUMREAL=	Specifies the number of realizations for each BY group written to the OUT= data set
Singularity Criteria	
SINGULAR1=	Sets the singularity criterion for Cholesky decomposition
SINGULAR2=	Sets the singularity criterion for covariance matrix sweeping

The following options can be used with the PROC SIMNORMAL statement.

DATA=SAS-data-set

specifies the input data set that must be a specially structured TYPE=CORR, COV, UCORR, UCOV, or SSCP SAS data set. If the DATA= option is omitted, the most recently created SAS data set is used.

SEED=seed-value

specifies the seed to use for the random number generator. If the SEED= value is omitted, the system clock is used. If the system clock is used, a note is written to the log; the note gives the seed value based on the system clock. In addition, the random seed stream is copied to the OUT= data set if the OUTSEED option is specified.

SEEDBY

specifies that the seed stream be reinitialized for each BY group. By default, a single random stream is used over all BY groups. If you specify SEEDBY, the random stream starts again at the initial seed value. This initial value is from the SEED= value that you specify. If you do not specify a SEED=value, the system clock generates this initial seed.

For example, suppose you had a TYPE=CORR data set with BY groups, and the mean, variances, and covariance or correlation values were identical for each BY group. Then if you specified SEEDBY, the simulated values in each BY group in the OUT= data set would be identical.

OUT=SAS-data-set

specifies a SAS data set in which to store the simulated values for the VAR variables. If you omit the OUT=option, the output data set is created and given a default name by using the DATA n convention.

See the section “[OUT= Output Data Set](#)” on page 7841 for details.

NUMREAL= n

specifies the number of realizations to generate. A value of NUMREAL=500 generates 500 observations in the OUT=dataset, or 500 observations within each BY group if a BY statement is given.

NUMREAL can be abbreviated as NUMR or NR.

OUTSEED

requests that the seed values be included in the OUT= data set. The variable Seed is added to the OUT= data set. The first value of Seed is the SEED= value specified in the PROC SIMNORMAL statement (or obtained from the system clock); subsequent values are produced by the random number generator.

OUTCOND

requests that the values of the conditioning variables be included in the OUT= data set. These values are constant for the data set or within a BY group. Note that specifying OUTCOND can greatly increase the size of the OUT= data set. This increase depends on the number of conditioning variables.

SINGULAR1=number

specifies the first singularity criterion, which is applied to the Cholesky decomposition of the covariance matrix. The SINGULAR1= value must be in the range (0, 1). The default value is 10^{-8} . SINGULAR1 can be abbreviated SING1.

SINGULAR2=number

specifies the second singularity criterion, which is applied to the sweeping of the covariance or correlation matrix to obtain the conditional covariance. The SINGULAR2=option is applicable only when a CONDITION statement is given. The SINGULAR2= value must be in the range (0, 1). The default value is 10^{-8} . SINGULAR2 can be abbreviated SING2.

BY Statement

BY *variables* ;

A BY statement can be used with the SIMNORMAL procedure to obtain separate simulations for each covariance structure defined by the BY variables. When a BY statement appears, the procedure expects the input DATA= data set to be sorted in the order of the BY variables. If a CONDITION statement is used along with a BY statement, there must be a _TYPE_='COND' observation within each BY group. Note that if a BY statement is specified, the number of realizations specified by the NUMREAL= option are produced for each BY group.

CONDITION Statement

CONDITION | **COND** *variables* ;

A CONDITION statement specifies the conditioning variables. The presence of a CONDITION statement requests that a conditional simulation be performed.

The lack of a CONDITIONAL statement simply means that an unconditional simulation for the VAR variables is to be performed.

If a CONDITION statement is given, the variables listed must be numeric variables in the DATA= data set. This requires a conditioning value for each of the CONDITION variables. This value is supplied by adding a _TYPE_='COND' observation for each CONDITION variable. Such observations are added to the DATA= data set by a DATA step.

Note that a data set created by the CORR procedure is automatically given the TYPE=COV, UCOV, CORR, or UCORR attribute, so you do not have to specify the TYPE= option in the DATA= option in the PROC SIMNORMAL statement. However, when adding the conditioning values by using a DATA step with a SET statement, you must use the TYPE=COV, UCOV, CORR, or UCORR attribute in the new data set. See the section “[Getting Started: SIMNORMAL Procedure](#)” on page 7837 for an example in which the TYPE is set.

VAR Statement

VAR *variables* ;

Use the VAR statement to specify the analysis variables. Only numeric variables can be specified. If a VAR statement is not given, all numeric variables in the DATA= data set that are not in the CONDITION or BY statement are used.

OUT= Output Data Set

The SIMNORMAL procedure produces a single output data set: the OUT=*SAS-data-set*.

The OUT= data set contains the following variables:

- all variables listed in the VAR statement

- all variables listed in the BY statement, if one is given
- Rnum, which is the realization number within the current BY group
- Seed, which is current seed value, if the OUTSEED option is specified
- all variables listed in the CONDITION statement, if a CONDITION statement is given and the OUTCOND option is specified

The number of observations is determined by the value of the NUMREAL= option. If there are no BY groups, the number of observations in the OUT= data set is equal to the value of the NUMREAL= option. If there are BY groups, there are number of observations equals the value of the NUMREAL= option for each BY group.

Details: SIMNORMAL Procedure

Introduction

There are a number of approaches to simulating a set of dependent random variables. In the context of spatial random fields, these include sequential indicator methods, turning bands, and the Karhunen-Loeve expansion. See Christakos (1992, Chapter 8) and Deutsch and Journel (1992, Chapter 5) for details.

In addition, there is the LU decomposition method, a particularly simple and computationally efficient for normal or Gaussian variates. For a given covariance matrix, the $\mathbf{LU} = \mathbf{LL}'$ decomposition is computed once, and the simulation proceeds by repeatedly generating a vector of independent $N(0, 1)$ random variables and multiplying by the $\mathbf{L}$ matrix.

One problem with this technique is that memory is required to hold the covariance matrix of all the analysis and conditioning variables in core.

Unconditional Simulation

It is a simple matter to produce an $N(0, 1)$ random number, and by stacking k such numbers in a column vector you obtain a vector with independent standard normal components $\mathbf{W} \sim N_k(\mathbf{0}, \mathbf{I})$. The meaning of the terms *independence* and *randomness* in the context of a deterministic algorithm required for the generation of these numbers is somewhat subtle; see Knuth (1973, Vol. 2, Chapter 3) for a discussion of these issues.

Rather than $\mathbf{W} \sim N_k(\mathbf{0}, \mathbf{I})$, what is required is the generation of a vector $\mathbf{Z} \sim N_k(\mathbf{0}, \mathbf{V})$ —that is,

$$\mathbf{Z} = \begin{bmatrix} Z_1 \\ Z_2 \\ \vdots \\ Z_k \end{bmatrix}$$

with covariance matrix

$$\mathbf{V} = \begin{pmatrix} \sigma_{11} & \sigma_{12} & \cdots & \sigma_{1k} \\ \sigma_{21} & \sigma_{22} & \cdots & \sigma_{2k} \\ & \ddots & & \\ \sigma_{k1} & \sigma_{k2} & \cdots & \sigma_{kk} \end{pmatrix}$$

where

$$\sigma_{ij} = \text{Cov}(Z_i, Z_j)$$

If the covariance matrix is symmetric and positive definite, it has a Cholesky root $\mathbf{L}$ such that $\mathbf{V}$ can be factored as

$$\mathbf{V} = \mathbf{L}\mathbf{L}'$$

where $\mathbf{L}$ is lower triangular. See Ralston and Rabinowitz (1978, Chapter 9, Section 3-3) for details. This vector $\mathbf{Z}$ can be generated by the transformation $\mathbf{Z} = \mathbf{L}\mathbf{W}$. Note that this is where the assumption of multivariate normality is crucial. If $\mathbf{W} \sim N_k(\mathbf{0}, \mathbf{I}_k)$, then $\mathbf{Z} = \mathbf{L}\mathbf{W}$ is also normal or Gaussian. The mean of $\mathbf{Z}$ is

$$\mathbf{E}(\mathbf{Z}) = \mathbf{L}(\mathbf{E}(\mathbf{W})) = \mathbf{0}$$

and the variance is

$$\text{Var}(\mathbf{Z}) = \text{Var}(\mathbf{L}\mathbf{W}) = \mathbf{E}(\mathbf{L}\mathbf{W}\mathbf{W}'\mathbf{L}') = \mathbf{L} \mathbf{E}(\mathbf{W}\mathbf{W}') \mathbf{L}' = \mathbf{L}\mathbf{L}' = \mathbf{V}$$

Finally, let $Y_k = Z_k + \mu_k$; that is, you add a mean term to each variable Z_k . The covariance structure of the Y_k 's remains the same. Unconditional simulation is done by simply repeatedly generating k $N(0, 1)$ random numbers, stacking them, and performing the transformation

$$\mathbf{W} \mapsto \mathbf{Z} = \mathbf{L}\mathbf{W} \mapsto \mathbf{Y} = \mathbf{Z} + \boldsymbol{\mu}$$

Conditional Simulation

For a conditional simulation, this distribution of

$$\mathbf{Y} = \begin{bmatrix} Y_1 \\ Y_2 \\ \vdots \\ Y_k \end{bmatrix}$$

must be conditioned on the values of the CONDITION variables. The relevant general result concerning conditional distributions of multivariate normal random variables is the following. Let $\mathbf{X} \sim N_m(\boldsymbol{\mu}, \boldsymbol{\Sigma})$, where

$$\mathbf{X} = \begin{bmatrix} \mathbf{X}_1 \\ \mathbf{X}_2 \end{bmatrix}$$

$$\boldsymbol{\mu} = \begin{bmatrix} \boldsymbol{\mu}_1 \\ \boldsymbol{\mu}_2 \end{bmatrix}$$

$$\boldsymbol{\Sigma} = \begin{pmatrix} \boldsymbol{\Sigma}_{11} & \boldsymbol{\Sigma}_{12} \\ \boldsymbol{\Sigma}_{21} & \boldsymbol{\Sigma}_{22} \end{pmatrix}$$

and where bX_1 is $k \times 1$, X_2 is $n \times 1$, $\boldsymbol{\Sigma}_{11}$ is $k \times k$, $\boldsymbol{\Sigma}_{22}$ is $n \times n$, and $\boldsymbol{\Sigma}_{12} = \boldsymbol{\Sigma}_{21}'$ is $k \times n$, with $k + n = m$. The full vector $\mathbf{X}$ has simply been partitioned into two subvectors, $\mathbf{X}_1$ and $\mathbf{X}_2$, and $\boldsymbol{\Sigma}$ has been similarly partitioned into covariances and cross covariances.

With this notation, the distribution of $\mathbf{X}_1$ conditioned on $\mathbf{X}_2 = x_2$ is $N_k(\tilde{\boldsymbol{\mu}}, \tilde{\boldsymbol{\Sigma}})$, with

$$\tilde{\boldsymbol{\mu}} = \boldsymbol{\mu}_1 + \boldsymbol{\Sigma}_{12}\boldsymbol{\Sigma}_{22}^{-1}(x_2 - \boldsymbol{\mu}_2)$$

and

$$\tilde{\boldsymbol{\Sigma}} = \boldsymbol{\Sigma}_{11} - \boldsymbol{\Sigma}_{12}\boldsymbol{\Sigma}_{22}^{-1}\boldsymbol{\Sigma}_{21}$$

See Searle (1971, pp. 46–47) for details.

Using the SIMNORMAL procedure corresponds with the conditional simulation as follows. Let $Y_1, \dots, Y_k$ be the VAR variables as before (k is the number of variables in the VAR list). Let the mean vector for $\mathbf{Y}$ be denoted by $\boldsymbol{\mu}_1 = E(\mathbf{Y})$. Let the CONDITION variables be denoted by $C_1, \dots, C_n$ (where n is the number of variables in the COND list). Let the mean vector for $\mathbf{C}$ be denoted by $\boldsymbol{\mu}_2 = E(\mathbf{C})$ and the conditioning values be denoted by

$$\mathbf{c} = \begin{bmatrix} c_1 \\ c_2 \\ \vdots \\ c_n \end{bmatrix}$$

Then stacking

$$\mathbf{X} = \begin{bmatrix} \mathbf{Y} \\ \mathbf{C} \end{bmatrix}$$

the variance of $\mathbf{X}$ is

$$\mathbf{V} = \text{Var}(\mathbf{X}) = \boldsymbol{\Sigma} = \begin{pmatrix} \mathbf{V}_{11} & \mathbf{V}_{12} \\ \mathbf{V}_{21} & \mathbf{V}_{22} \end{pmatrix}$$

where $\mathbf{V}_{11} = \text{Var}(\mathbf{Y})$, $\mathbf{V}_{12} = \text{Cov}(\mathbf{Y}, \mathbf{C})$, and $\mathbf{V}_{22} = \text{Var}(\mathbf{C})$. By using the preceding general result, the relevant covariance matrix is

$$\tilde{\mathbf{V}} = \mathbf{V}_{11} - \mathbf{V}_{12}\mathbf{V}_{22}^{-1}\mathbf{V}_{21}$$

and the mean is

$$\tilde{\boldsymbol{\mu}} = \boldsymbol{\mu}_1 + \mathbf{V}_{12}\mathbf{V}_{22}^{-1}(\mathbf{c} - \boldsymbol{\mu}_2)$$

By using $\tilde{\mathbf{V}}$ and $\tilde{\boldsymbol{\mu}}$, simulating $(\mathbf{Y}|\mathbf{C} = \mathbf{c}) \sim N_k(\tilde{\boldsymbol{\mu}}, \tilde{\mathbf{V}})$ now proceeds as in the unconditional case.

Example: SIMNORM Procedure

The following example illustrates the use of PROC SIMNORMAL to generate variable values conditioned on a set of related or correlated variables.

Suppose you are given a sample of size 50 from ten normally distributed, correlated random variables, $IN_{1,i}, \dots, IN_{5,i}, OUT_{1,i}, \dots, OUT_{5,i}, i = 1, \dots, 50$. The first five variables represent input variables for a chemical manufacturing process, and the last five are output variables.

First, the data are input and the correlation structure is determined by using PROC CORR, as in the following statements. The results are shown in [Figure 90.2](#).

```
data a ;
  input in1-in5 out1-out5 ;
  datalines ;
  9.3500    10.0964    7.3177    10.3617    10.3444    9.4612
  10.7443    9.9026    9.0144    11.7968
  7.8599    10.4560    10.0075    8.5875    10.0014    10.3869

  ... more lines ...

  8.9174    9.9623    9.5742    9.9713
run ;

proc corr data=a cov nocorr outp=outcov ;
  var in1-in5 out1-out5 ;
run ;
```

Figure 90.2 Correlation of Chemical Process Variables

Statistics for PROC SIMNORM Sample Using NUMREAL=5000							
The CORR Procedure							
10 Variables:	in1	in2	in3	in4	in5	out1	out2
	out3	out4	out5				

Figure 90.2 continued

Covariance Matrix, DF = 49						
	in1	in2	in3	in4	in5	
in1	1.019198331	0.128086799	0.291646382	0.327014916	0.417546732	
in2	0.128086799	1.056460818	0.143581799	0.095937707	0.104117743	
in3	0.291646382	0.143581799	1.384051249	0.058853960	0.326107730	
in4	0.327014916	0.095937707	0.058853960	1.023128678	0.347916864	
in5	0.417546732	0.104117743	0.326107730	0.347916864	1.606858140	
out1	0.097650713	0.056612934	0.093498839	0.022915645	0.360270318	
out2	0.206698403	-0.121700731	0.078294087	0.125961491	0.297046593	
out3	0.516271121	0.266581451	0.481576554	0.179627237	0.749212945	
out4	0.118726106	0.092288067	0.057816322	0.075028230	0.220196337	
out5	0.261770905	-0.020971411	0.259053423	0.078147576	0.349618466	
Covariance Matrix, DF = 49						
	out1	out2	out3	out4	out5	
in1	0.097650713	0.206698403	0.516271121	0.118726106	0.261770905	
in2	0.056612934	-0.121700731	0.266581451	0.092288067	-0.020971411	
in3	0.093498839	0.078294087	0.481576554	0.057816322	0.259053423	
in4	0.022915645	0.125961491	0.179627237	0.075028230	0.078147576	
in5	0.360270318	0.297046593	0.749212945	0.220196337	0.349618466	
out1	0.807007554	0.217285879	0.064816340	-0.053931448	0.037758721	
out2	0.217285879	0.929455806	0.206825664	0.138551008	0.054039499	
out3	0.064816340	0.206825664	1.837505268	0.292963975	0.165910481	
out4	-0.053931448	0.138551008	0.292963975	0.832831377	-0.067396486	
out5	0.037758721	0.054039499	0.165910481	-0.067396486	0.697717191	
Simple Statistics						
Variable	N	Mean	Std Dev	Sum	Minimum	Maximum
in1	50	10.18988	1.00955	509.49400	7.63500	12.58860
in2	50	10.10673	1.02784	505.33640	8.12580	13.78310
in3	50	10.14888	1.17646	507.44420	7.31770	12.40080
in4	50	10.03884	1.01150	501.94200	7.40490	11.99060
in5	50	10.22587	1.26762	511.29340	7.23350	12.93360
out1	50	9.85347	0.89834	492.67340	8.01220	12.24660
out2	50	9.96857	0.96408	498.42840	7.76420	12.09450
out3	50	10.29588	1.35555	514.79410	7.29660	13.74200
out4	50	10.15856	0.91260	507.92780	8.43090	12.45230
out5	50	10.26023	0.83529	513.01130	7.86060	11.96000

After the mean and correlation structure are determined, any subset of these variables can be simulated. Suppose you are interested in a particular function of the output variables for two sets of values of the input variables for the process. In particular, you are interested in the mean and variability of the following function over 500 runs of the process conditioned on each set of input values:

$$f(out_1, \dots, out_5) = \frac{out_1 - out_3}{out_1 + out_2 + out_3 + out_4 + out_5}$$

Although the distribution of these quantities could be determined theoretically, it is simpler to perform a conditional simulation by using PROC SIMNORMAL.

To do this, you first append a `_TYPE_='COND'` observation to the covariance data set produced by PROC CORR for each group of input values:

```
data cond1 ;
  _TYPE_='COND' ;
  in1 = 8 ;
  in2 = 10.5 ;
  in3 = 12 ;
  in4 = 13.5 ;
  in5 = 14.4 ;
  output ;
run ;

data cond2 ;
  _TYPE_='COND' ;
  in1 = 15.4 ;
  in2 = 13.7 ;
  in3 = 11 ;
  in4 = 7.9 ;
  in5 = 5.5 ;
  output ;
run ;
```

Next, each of these conditioning observations is appended to a copy of the `OUTP=OUTCOV` data from the CORR procedure, as in the following statements. A new variable, `INPUT`, is added to distinguish the sets of input values. This variable is used as a `BY` variable in subsequent steps.

```
data outcov1 ;
  input=1 ;
  set outcov cond1 ;
run ;

data outcov2 ;
  input=2 ;
  set outcov cond2 ;
run ;
```

Finally, these two data sets are concatenated:

```
data outcov ;
  set outcov1 outcov2 ;
run ;
proc print data=outcov ;
  where (_type_ ne 'COV') ;
run ;
```

Figure 90.3 shows the added observations.

Figure 90.3 OUTP= Data Set from PROC CORR with _TYPE_=COND Observations Appended

Statistics for PROC SIMNORM Sample Using NUMREAL=5000							
Obs	input	_TYPE_	_NAME_	in1	in2	in3	in4
11	1	MEAN		10.1899	10.1067	10.1489	10.0388
12	1	STD		1.0096	1.0278	1.1765	1.0115
13	1	N		50.0000	50.0000	50.0000	50.0000
14	1	COND		8.0000	10.5000	12.0000	13.5000
25	2	MEAN		10.1899	10.1067	10.1489	10.0388
26	2	STD		1.0096	1.0278	1.1765	1.0115
27	2	N		50.0000	50.0000	50.0000	50.0000
28	2	COND		15.4000	13.7000	11.0000	7.9000
Obs	in5	out1	out2	out3	out4	out5	
11	10.2259	9.8535	9.9686	10.2959	10.1586	10.2602	
12	1.2676	0.8983	0.9641	1.3555	0.9126	0.8353	
13	50.0000	50.0000	50.0000	50.0000	50.0000	50.0000	
14	14.4000	.	.	.	.	.	
25	10.2259	9.8535	9.9686	10.2959	10.1586	10.2602	
26	1.2676	0.8983	0.9641	1.3555	0.9126	0.8353	
27	50.0000	50.0000	50.0000	50.0000	50.0000	50.0000	
28	5.5000	.	.	.	.	.	

You now run PROC SIMNORMAL, specifying the input data set and the VAR and COND variables. Note that you must specify a TYPE=COV or TYPE=CORR for the input data set. PROC CORR automatically assigns a TYPE=COV or TYPE=CORR attribute for the OUTP= data set. However, since the intermediate DATA steps that appended the _TYPE_='COND' observations turned off this attribute, an explicit TYPE=CORR in the DATA= option in the PROC SIMNORMAL statement is needed.

The specification of PROC SIMNORMAL now follows from the problem description. The condition variables are IN1–IN5, the analysis variables are OUT1–OUT5, and 500 realizations are required. A seed value can be chosen arbitrarily, or the system clock can be used. Note that in the following statements, the simulation is done for each of the values of the BY variable INPUT:

```
proc simnormal data=outcov(type=cov)
  out = osim
  numreal = 500
  seed = 33179
  ;
  by input ;
  var out1-out5 ;
  cond in1-in5 ;
run;

data b;
  set osim ;
  denom = sum(of out1-out5) ;
  if abs(denom) < 1e-8 then ff = . ;
  else ff = (out1-out3)/denom ;
run ;
```

The DATA step that follows the simulation computes the function $f(out_1, \dots, out_5)$; in the following statements the UNIVARIATE procedure computes the simple statistics for this function for each set of conditioning input values. This is shown in Figure 90.4, and Figure 90.5 shows the distribution of the function values for each set of input values by using the SGPanel procedure.

```
proc univariate data=b ;
  by input ;
  var ff ;
run ;
title ;
proc sgpanel data=b ;
  panelby input ;
  REFLINE 0 / axis= x ;
  density ff ;
run ;
```

Figure 90.4 Simple Statistics for ff for Each Set of Input Values

Statistics for PROC SIMNORM Sample Using NUMREAL=5000				
----- input=1 -----				
The UNIVARIATE Procedure				
Variable: ff				
Moments				
N	500	Sum Weights	500	
Mean	-0.0134833	Sum Observations	-6.7416303	
Std Deviation	0.02830426	Variance	0.00080113	
Skewness	0.56773239	Kurtosis	1.31522925	
Uncorrected SS	0.49066351	Corrected SS	0.39976435	
Coeff Variation	-209.92145	Std Error Mean	0.0012658	
----- input=1 -----				
Basic Statistical Measures				
Location		Variability		
Mean	-0.01348	Std Deviation	0.02830	
Median	-0.01565	Variance	0.0008011	
Mode	.	Range	0.21127	
		Interquartile Range	0.03618	
----- input=1 -----				
Tests for Location: Mu0=0				
Test	-Statistic-	-----p Value-----		
Student's t	t -10.6519	Pr > t	<.0001	
Sign	M -106	Pr >= M	<.0001	
Signed Rank	S -33682	Pr >= S	<.0001	

Figure 90.4 continued

```
----- input=1 -----

Quantiles (Definition 5)

Level              Quantile
100% Max           0.11268600
99%                0.07245656
95%                0.03270269
90%                0.02064338
75% Q3             0.00370322
50% Median         -0.01564850
25% Q1             -0.03247389
10%                -0.04716239
5%                 -0.05572806
1%                 -0.07201126
0% Min             -0.09858350

----- input=1 -----

Extreme Observations

-----Lowest-----      -----Highest-----
Value      Obs           Value      Obs
-0.0985835  471          0.0750538    22
-0.0908179  472          0.0794747   245
-0.0802423   90          0.0840160    48
-0.0760645  249          0.1004812   222
-0.0756070  226          0.1126860    50

Statistics for PROC SIMNORM Sample Using NUMREAL=5000

----- input=2 -----

The UNIVARIATE Procedure
Variable:  ff

Moments

N              500      Sum Weights              500
Mean          -0.0405913  Sum Observations    -20.295631
Std Deviation  0.03027008  Variance            0.00091628
Skewness       0.1033062  Kurtosis            -0.1458848
Uncorrected SS 1.28104777  Corrected SS        0.4572225
Coeff Variation -74.57289  Std Error Mean      0.00135372
```

Figure 90.4 continued

```
----- input=2 -----

      Basic Statistical Measures

      Location                      Variability

Mean      -0.04059      Std Deviation      0.03027
Median    -0.04169      Variance          0.0009163
Mode       .            Range            0.18332
                        Interquartile Range    0.04339

----- input=2 -----

      Tests for Location: Mu0=0

      Test          -Statistic-      -----p Value-----

Student's t      t      -29.985      Pr > |t|      <.0001
Sign             M       -203      Pr >= |M|     <.0001
Signed Rank      S     -58745      Pr >= |S|     <.0001

----- input=2 -----

      Quantiles (Definition 5)

      Level          Quantile

100% Max          0.06101208
99%                0.02693796
95%                0.01008202
90%               -0.00111776
75% Q3            -0.01847726
50% Median        -0.04169199
25% Q1            -0.06187039
10%               -0.07798499
5%                -0.08606522
1%                -0.11026564
0% Min            -0.12231183


----- input=2 -----

      Extreme Observations

      -----Lowest-----      -----Highest-----

      Value      Obs          Value      Obs

-0.122312      937          0.0272906      688
-0.119884      980          0.0291769      652
-0.113512      920          0.0388217      670
-0.112345      523          0.0477261      845
-0.110497      897          0.0610121      632
```

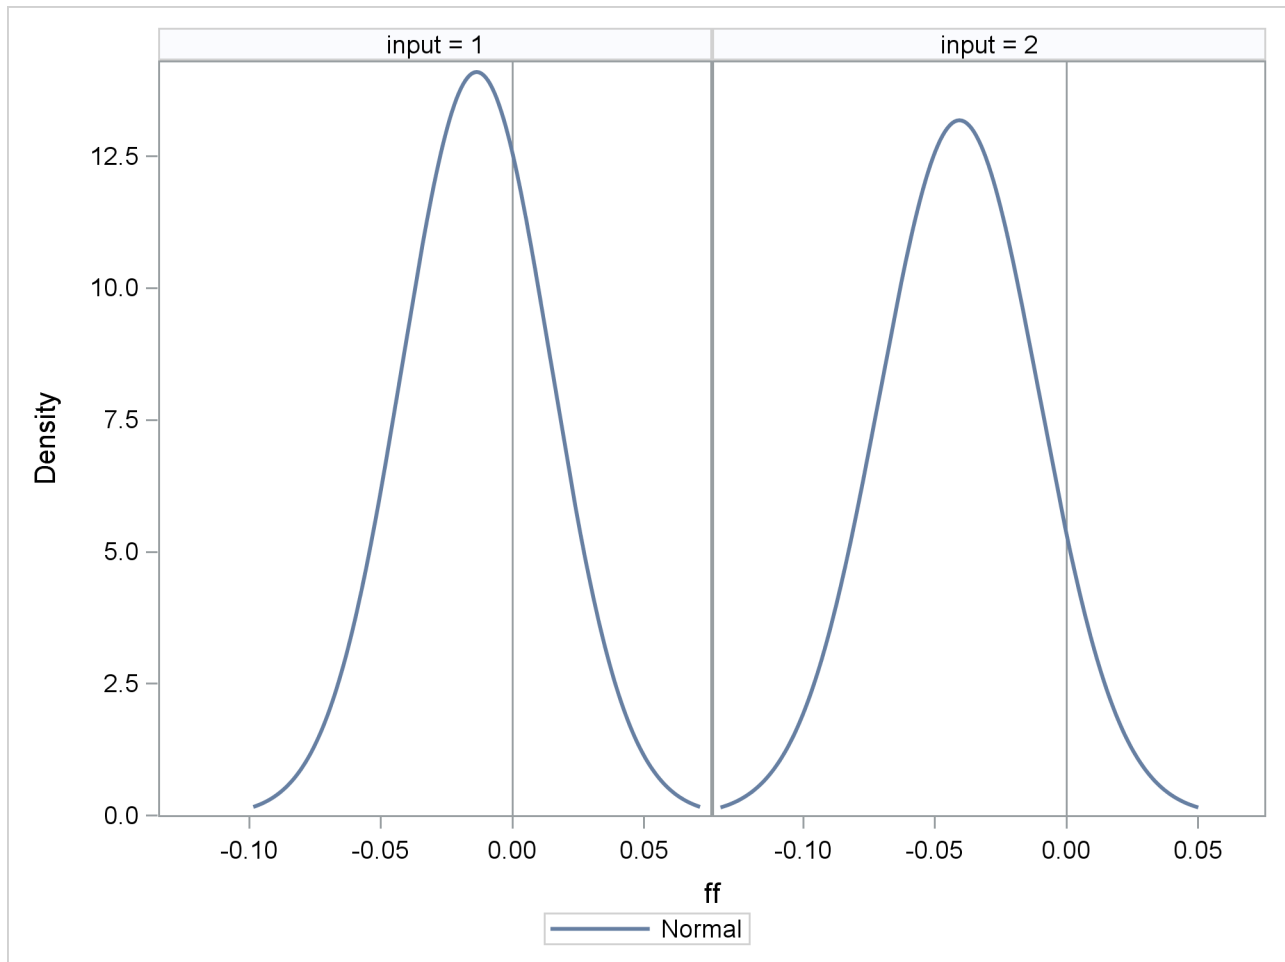Figure 90.5 Frequency Plot for ff for Each Set of Input Values

References

- Christakos, G. (1992), *Random Field Models in Earth Sciences*, New York: Academic Press.
- Deutsch, C. V. and Journel, A. G. (1992), *GSLIB: Geostatistical Software Library and User's Guide*, New York: Oxford University Press.
- Knuth, D. E. (1973), *Seminumerical Algorithms*, volume 2 of *The Art of Computer Programming*, Reading, MA: Addison-Wesley.
- Ralston, A. and Rabinowitz, P. (1978), *A First Course in Numerical Analysis*, New York: McGraw-Hill.
- Searle, S. R. (1971), *Linear Models*, New York: John Wiley & Sons.

Subject Index

SIMNORMAL procedure

conditional simulation, [7843](#)

Gaussian random variables, [7837](#)

introductory example, [7837](#)

LU decomposition method, [7842](#)

normal random variables, [7837](#)

simulation, [7837](#)

unconditional simulation, [7842](#)

Syntax Index

BY statement

SIMNORMAL procedure, [7841](#)

CONDITION statement

CONDITION statement (SIMNORMAL), [7841](#)

DATA= option

PROC SIMNORMAL statement, [7840](#)

NUMREAL= option

PROC SIMNORMAL statement, [7840](#)

OUT= option

PROC SIMNORMAL statement, [7840](#)

OUTCOND option

PROC SIMNORMAL statement, [7840](#)

OUTSEED option

PROC SIMNORMAL statement, [7840](#)

PROC SIMNORM statement

SIMNORMAL procedure, [7839](#)

SEED= option

PROC SIMNORMAL statement, [7840](#)

SEEDBY option

PROC SIMNORMAL statement, [7840](#)

SIMNORMAL procedure

syntax, [7839](#)

SIMNORMAL procedure, BY statement, [7841](#)

SINGULAR1= option

PROC SIMNORMAL statement, [7840](#)

SINGULAR2= option

PROC SIMNORMAL statement, [7840](#)

VAR statement

VAR statement (SIMNORMAL), [7841](#)